

	Report No: R1989	FCC ID: SZBCSE035	
	Issue No: 2		
	Test No: T1351	Test Report	Page: 1 of 14



dB Technology

|----- (Cambridge Ltd.) -----|

EMC
Testing

EMC
Consultancy

EMC
Training

23, Headington Drive,
Cambridge.
CB1 9HE
Tel : 01954 251974 (test site)
or : 01223 241140 (accounts)
Fax : 01954 251907
web : www.dbtechnology.co.uk
email: mail@dbtechnology.co.uk

REPORT ON ELECTROMAGNETIC COMPATIBILITY TESTS

Performed at:
TWENTY PENCE TEST SITE

**Twenty Pence Road,
Cottenham,
Cambridge
U.K.
CB4 8PS**

on

Controlled Speed Engineering

CSE035

dated

28 January 2005

Document History

Issue	Date	Affected page(s)	Description of modifications	Revised by	Approved by
1	03/02/05		Initial release		
2	24/05/05	All	FCC ID corrected	CA	DS

Based on report template:
v031111

*This report shall not be reproduced except in full, without the written approval of:
dB Technology (Cambridge) Ltd*

	Report No: R1989 Issue No: 2	FCC ID: SZBCSE035	
	Test No: T1351	Test Report	Page: 2 of 14

Equipment Under Test (EUT): CSE035

Test Commissioned by: Controlled Speed Engineering
St Pegs House
Thornhill Beck Lane
Brighouse
N. Yorkshire

Representative: Alan Hurst

Test Started: 27 January 2005

Test Completed: 27 January 2005

Test Engineer: Dave Smith

Date of Report: 28 January 2005

Report:

Written by: Dave Smith Checked by: Derek Barlow

Signature: D. A. Smith Signature: D. Barlow

Date: 28th January 2005 Date: 3rd February 2005

dB Technology can only report on the specific unit(s) tested at its site. The responsibility for extrapolating this data to a product line lies solely with the manufacturer.

Test Standards Applied

CFR 47 : 2004	<i>Code of Federal Regulations: Pt 15 Subpart C - Radio Frequency Devices - Intentional Radiators</i>
---------------	---

	Report No: R1989 Issue No: 2	FCC ID: SZBCSE035	
	Test No: T1351	Test Report	Page: 3 of 14

Emissions Test Results Summary

CFR 47 : 2004

PASS

Test	Port	Method	Limit	PASS/FAIL	Notes
Conducted Emissions	ac power	ANSI C63.4:2001	CISPR22(B)	N/A	#1
Radiated Emissions		ANSI C63.4:2001	FCC(C)	PASS	

fcc_v040903

#1 Test not applicable because EUT was battery powered and had no ac power port.

	Report No: R1989	FCC ID: SZBCSE035	
	Issue No: 2		
	Test No: T1351	Test Report	Page: 4 of 14

Contents

1 EUT Details	5
1.1 General	5
1.2 Modifications to EUT	5
1.3 EUT Operating Modes	5
<i>Figure 1 Arrangement of EUT</i>	6
<i>Photograph 1 Arrangement of EUT</i>	6
2 Test Equipment	7
3 Tests	8
3.1 Radiated Emissions - Fundamental and Spurious	8
3.2 Emissions Bandwidth	8
4 Test Data	8
4.1 Radiated Emissions Results - below 1GHz	9
4.2 Radiated Emissions Results - above 1GHz	10
<i>PLOT 1 Radiated Emissions - 25MHz to 1GHz</i>	11
<i>PLOT 2 Radiated Emissions - 1GHz to 5GHz</i>	12
<i>PLOT 3 Duty Cycle</i>	13
<i>PLOT 4 Emission Bandwidth</i>	14

	Report No: R1989	FCC ID: SZBCSE035	
	Issue No: 2		
	Test No: T1351	Test Report	Page: 5 of 14

1 EUT Details

1.1 General

The EUT was a CSE035 remote control unit for a stair lift. The unit is an intentional transmitter operating at 433.9MHz. The transmitter operation is periodic and intended to operate under the provisions of CFR 47 part 15.231.

The unit was battery powered and had no ports for the connection of external cables.

Details of the EUT and associated peripherals used during the tests are listed below. Figure 1 shows the interconnections between the EUT and peripherals.

Item	Manufacturer	Model	Description	Serial No:	Notes
	CSE	CSE035	EUT		

1.2 Modifications to EUT

Details of any modifications that were required to achieve compliance are listed below. The modification numbers are referred to in the results sections as appropriate.

Mod No:	Details	Implemented for
1	Resistor value changed to reduce carrier level.	Harmonic levels


1.3 EUT Operating Modes

The EUT was tested in the following operating mode or modes. Generally, operating modes are chosen that will exercise the functions of the EUT as fully as possible and in a manner likely to produce maximum emission levels or susceptibility. Individual test result sheets reference the operating mode of the EUT.

Operating Mode	Details
1	Button held down to produce continuous transmissions.

	Report No: R1989	FCC ID: SZBCSE035	
	Issue No: 2		
Test No: T1351	Test Report		Page: 6 of 14

Figure 1 Arrangement of EUT

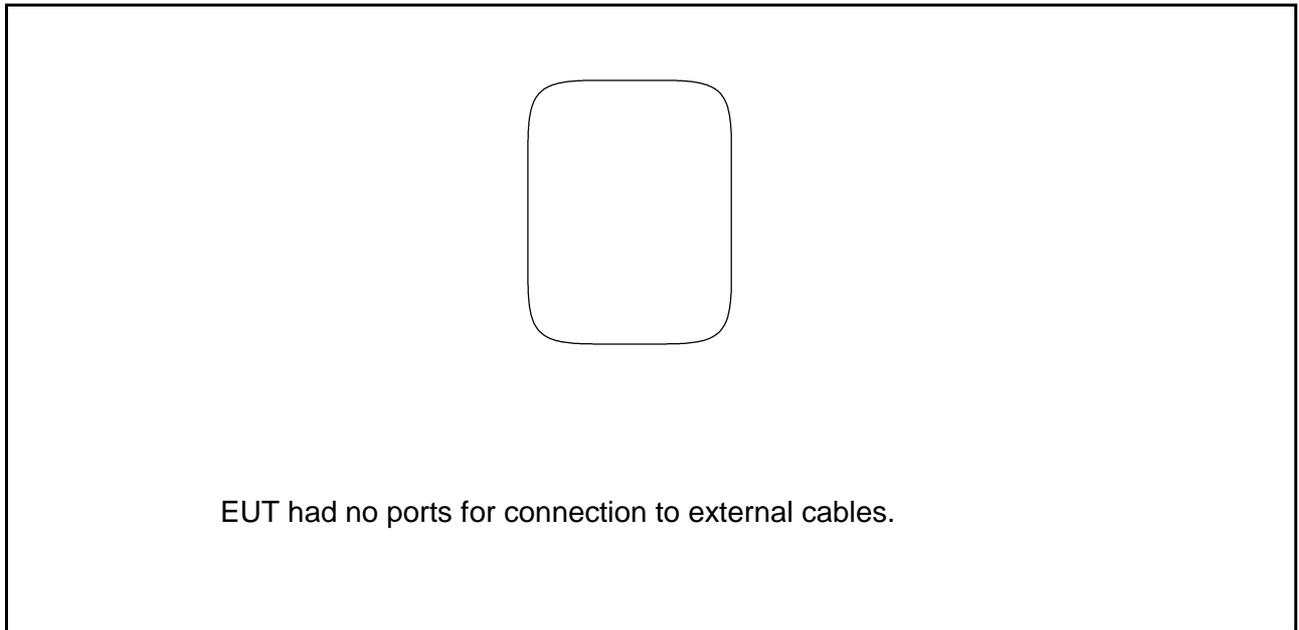

Photograph 1 Arrangement of EUT



	Report No: R1989	FCC ID: SZBCSE035	
	Issue No: 2		
	Test No: T1351	Test Report	Page: 7 of 14

2 Test Equipment

The test equipment used during the tests was one or more of the items listed below. Individual test result sheets indicate which items were used.

Ref No:	Details	Serial Number
A12	Chase Bilog CBL6111A	1012
A5	Chase Bilog CBL6111A	1760
A8	EMCO 3115 DR Guide	6070
PRE3	dB Tech 100M-20G 36dB pre-amp	3
R2	CHASE UHR 4000	6111
R4	R&S ESVS10	421872
R5	HP 8595E Spec. Analyser	3412A00701
R5B	dB Technology Pre-amp	dB001
R6	Marconi 2390 Spec Analyser	23901010

	Report No: R1989	FCC ID: SZBCSE035	
	Issue No: 2		
	Test No: T1351	Test Report	Page: 8 of 14

3 Tests

3.1 Radiated Emissions - Fundamental and Spurious

Initial scans were performed in a semi-anechoic screened room at a distance of 3m. Scans were performed over the frequency range specified in the test standard with the antenna both horizontally and vertically polarised. Scans were performed to frequencies exceeding the 10th harmonic of the carrier, which for this product required scans to frequencies above 4.44GHz. These scans were performed using a peak detector.

The results of these scans are shown in Plot 1 and Plot 2.

Significant emissions identified by the scans were measured on an open area test site at a test distance of 3m. Maximised readings are obtained by rotating the EUT through 360° and adjusting the height of the antenna from 1m to 4m. Measurements are made with the antenna both horizontally and vertically polarised and the results tabulated.

For measurements below 1GHz a CISPR quasipeak detector was used. For measurements above 1GHz a spectrum analyser with a peak detector was used. The standard specifies an average detector for measurement above 1GHz. Where necessary, average levels were calculated from the peak levels using the method described below.

The results of the measurements are shown in sections 4.1 and 4.2 of this report. All emissions complied with Section 15.231 of CFR 47.

Calculating Average Field Strengths

The duty cycle of the emissions was assessed by taking a scan with 0Hz span at the carrier centre frequency.

The results of this scan are shown in plot 3. The scan shows the transmitter to be on for 62.5msec out of a total period of 113.75msec.

Section 15.35 (c) of CFR 47 states that, for pulsed operation with a pulse train exceeding 100msec, the field strength is determined by the average absolute voltage during a 100msec period which gives maximum field strength. In this case a maximum 100msec period would have a pulse on for 62.5msec and off for 37.5msec. The average voltage will be $0.625 * \text{peak voltage}$. The average field strength would differ from the peak field strength by $20 * \log(0.625)$. The average field strength would therefore be -4.08dB relative to the peak field strength.

3.2 Emissions Bandwidth

A scan was performed around the carrier centre frequency. This was performed at close distance in a screened room. A 120kHz resolution bandwidth average detector with 1000 msec dwell time was used. The results are shown in plot 4.

The mask shown on the plot is based on the allowable bandwidth of 0.25% of carrier frequency with bandwidth determined at points 20dB below the carrier.

The plot shows the bandwidth to be less than 250kHz and is compliant with Section 15.231 of CFR 47.

4 Test Data

The following sections contain tabulated test results. Plots of various scans are included at the back of this section.

	Report No: R1989 Issue No: 2	FCC ID: SZBCSE035	
	Test No: T1351	Test Report	Page: 9 of 14

4.1 Radiated Emissions Results - below 1GHz

Factor Set 1:	A5_10m_04A	-	-	RG214_04A	25 m cable
Factor Set 2:	-	-	-	-	
Factor Set 3:	-	-	-	-	
Test Equipment:	R4 A12 CSET005				

Radiated Emissions

Company: Controlled Speed Engineering	Product: CSE035
Date: 27/01/2005	Test Eng: DS
Ports:	
Test: ANSI C63.4:2001 using limits of FCC(C)	
Ports:	
Test: using limits of	

Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Rec. Level dBuV	Corr'n Factor dB/m	Corr'n Factor dB	Total Level dBuV/m	Limit FCC(C) dBuV/m	Margin FCC(C) dB	Notes
1	1	1	3	1	433.903	V	42.0	20.7		62.7	80.8	18.1	#1
1	1	1	3	1	434.034	V	42.0	20.7		62.7	80.8	18.1	#1
1	1	1	3	1	433.903	H	36.4	20.7		57.1	80.8	23.7	#1
1	1	1	3	1	434.034	H	39.9	20.7		60.6	80.8	20.2	#1
1	1	1	3	1	867.794	V	9.1	29.0		38.1	60.8	22.7	#2
1	1	1	3	1	867.794	H	1.1	29.0		30.1	60.8	30.7	#2

Results	Minimum Margin PASS/FAIL	18.1 dB PASS
---------	-----------------------------	-----------------

Notes	Comments and Observations
-------	---------------------------

#1 #2	<p>Results of scan shown in plot 1.</p> <p>Measurement made with quasipeak detector. Fundamental limit - 15.231(b) Limit for harmonics -15.231(b) (except in restricted bands).</p> <p>Correction factor 1 is combination of antenna and cable. Field strength (dBuV/m) = reciver reading (dBuV) + CF1.</p>
----------	---


	Report No: R1989	FCC ID: SZBCSE035	
	Issue No: 2		
	Test No: T1351	Test Report	Page: 10 of 14

4.2 Radiated Emissions Results - above 1GHz

Factor Set 1:	A8_04A	PRESET2_04A	-	-
Factor Set 2:	-	-	-	-
Factor Set 3:	-	-	-	-
Test Equipment: R6 A8 CSET002 PRE3				

Radiated Emissions

Company: Controlled Speed Engineering					Product: CSE035								
Date: 27/01/2005					Test Eng: Dave Smith								
Ports:													
Test: ANSI C63.4:2001					using limits of FCC(C)								
Ports:													
Test: using limits of													
Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Rec. Level dBuV	Corr'n Factor dB/m	Corr'n Factor* dB	Total Level dBuV/m	Limit FCC(C) dBuV/m	Margin FCC(C) dB	Notes
2	1	1	3	1	1302.285	V	54.3	-8.5	-4.1	41.7	54.0	12.3	#2
2	1	1	3	1	1736.259	V	53.4	-6.8	-4.1	42.5	60.8	18.3	#1
2	1	1	3	1	2169.876	V	45.2	-4.8	-4.1	36.4	60.8	24.4	#1
2	1	1	3	1	2603.202	V	40.8	-3.2	-4.1	33.6	60.8	27.2	#1
2	1	1	3	1	3038.405	V	52.1	-1.1	-4.1	46.9	60.8	13.9	#1
2	1	1	3	1	3471.984	H	52.7	0.1	-4.1	48.8	60.8	12.0	#1
2	1	1	3	1	3904.802	V	55.6	0.1	-4.1	51.6	54.0	2.4	#2
2	1	1	3	1	4340.289	V	52.8	-0.4	-4.1	48.3	54.0	5.7	#2
Results											Minimum Margin	2.4 dB	
											PASS/FAIL	PASS	
Notes	Comments and Observations												
*	Results of scan shown in plot 2. Measurements made with peak detector. As described in section 3.1 of this report, average measurements can be calculated as 4.08 below peak measurements. This has been included as the second correction factor in the table above.												
#1	Limit for harmonics -15.231(b) (except in restricted bands).												
#2	Limit for restricted bands.												
	Correction factor 1 is combination of antenna, cable and preamp. Correction factor 2 is peak to average adjustment. Field strength (dBuV/m) = receiver reading (dBuV) + CF1 + CF2.												

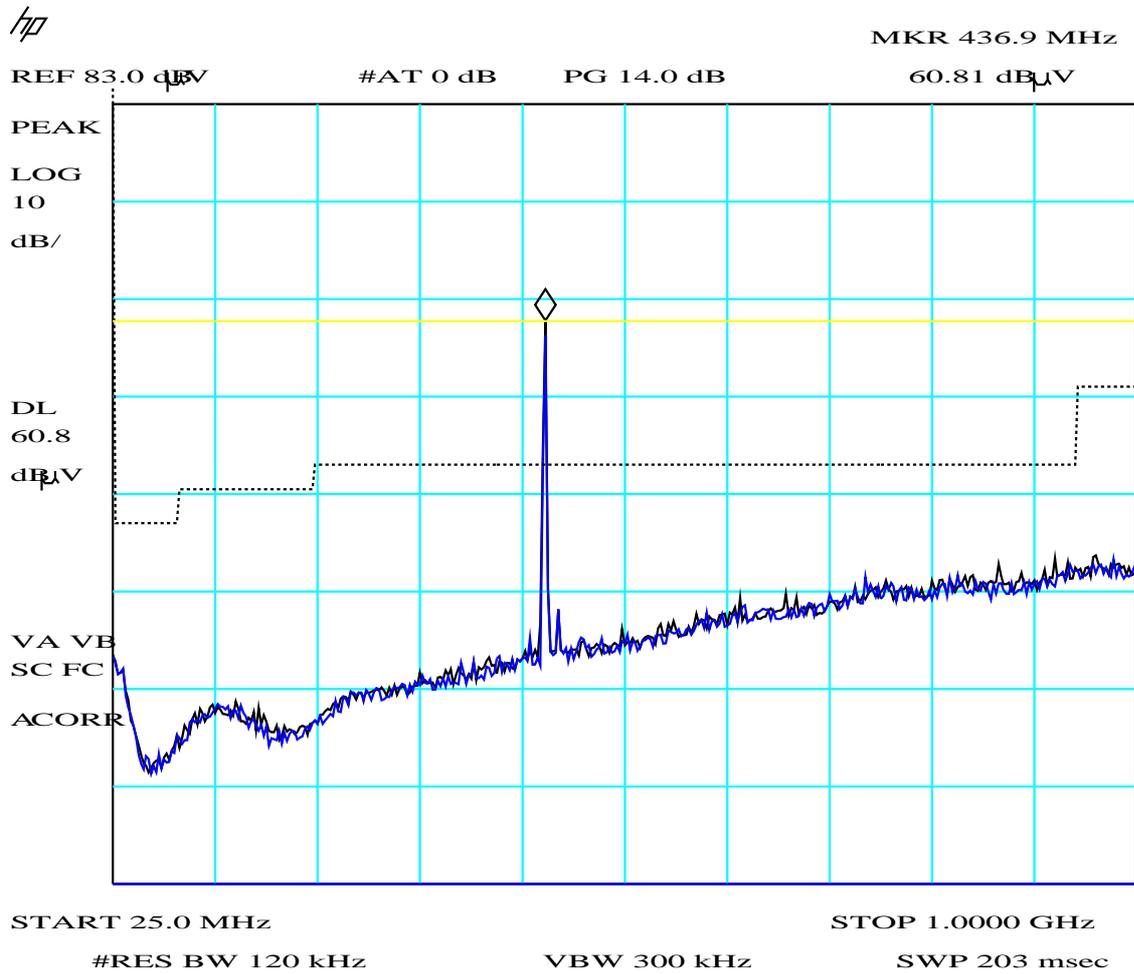


PLOT 1 Radiated Emissions - 25MHz to 1GHz

Company:	Controlled Speed Engineering	Product:	CSE035
Date:	27 Jan 05	Test Engineer:	Dave Smith
Test:	FCC Pt 15 Sub Pt C	Limit:	FCC (C)
Notes:			
433.92MHz. Output lowered. WITH PREAMP.			
Fundamental limit = 80.8dBuV/m. Upper limit = 60.8dBuV applied to harmonics except in restricted bands where lower limit applies.			
Equip: R5,R5B,CBL002,Patch1,CBL003,A5. Vertical - Black Trace, Horizontal - Blue Trace.			
Polarisation:	V + H	Orientation:	0 - 360°
Distance:	3m	Antenna:	DRG
Height:	1m	Filename:	H512761C.plt
Operating Mode:	1		
Mod. State:	0		

Frequency List (MHz)

hp

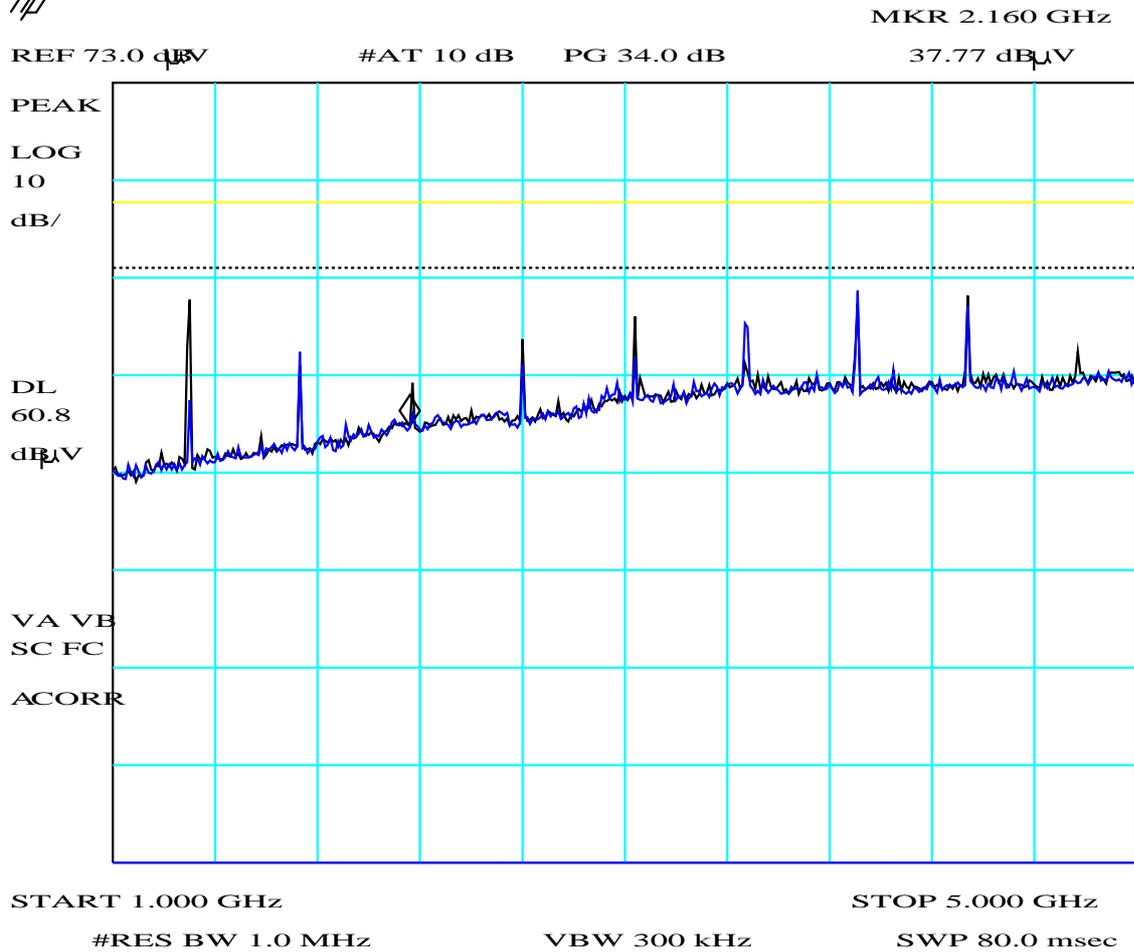


PLOT 2 Radiated Emissions - 1GHz to 5GHz

Company:	Controlled Speed Engineering	Product:	CSE035
Date:	27 Jan 05	Test Engineer:	Dave Smith
Test:	FCC Pt 15 Sub Pt C	Limit:	FCC (C)
Notes:			
433.92MHz. Output reduced. WITH PREAMP.			
Fundamental limit = 80.8dBuV/m. Upper limit = 60.8dBuV applied to harmonics except in restricted bands where lower limit applies.			
Equip: R5,PRE3,CBL043,CBL044,A8. Vertical - Black Trace, Horizontal - Blue Trace.			
Polarisation:	V + H	Orientation:	0 - 360°
Distance:	3m	Antenna:	DRG
Height:	1m	Filename:	H51275FA.plt
Operating Mode:			1
Mod. State:			0

Frequency List (MHz)

1302.285	1736.259	2169.876	2603.202	3038.405	3471.984	3904.802
4340.289						

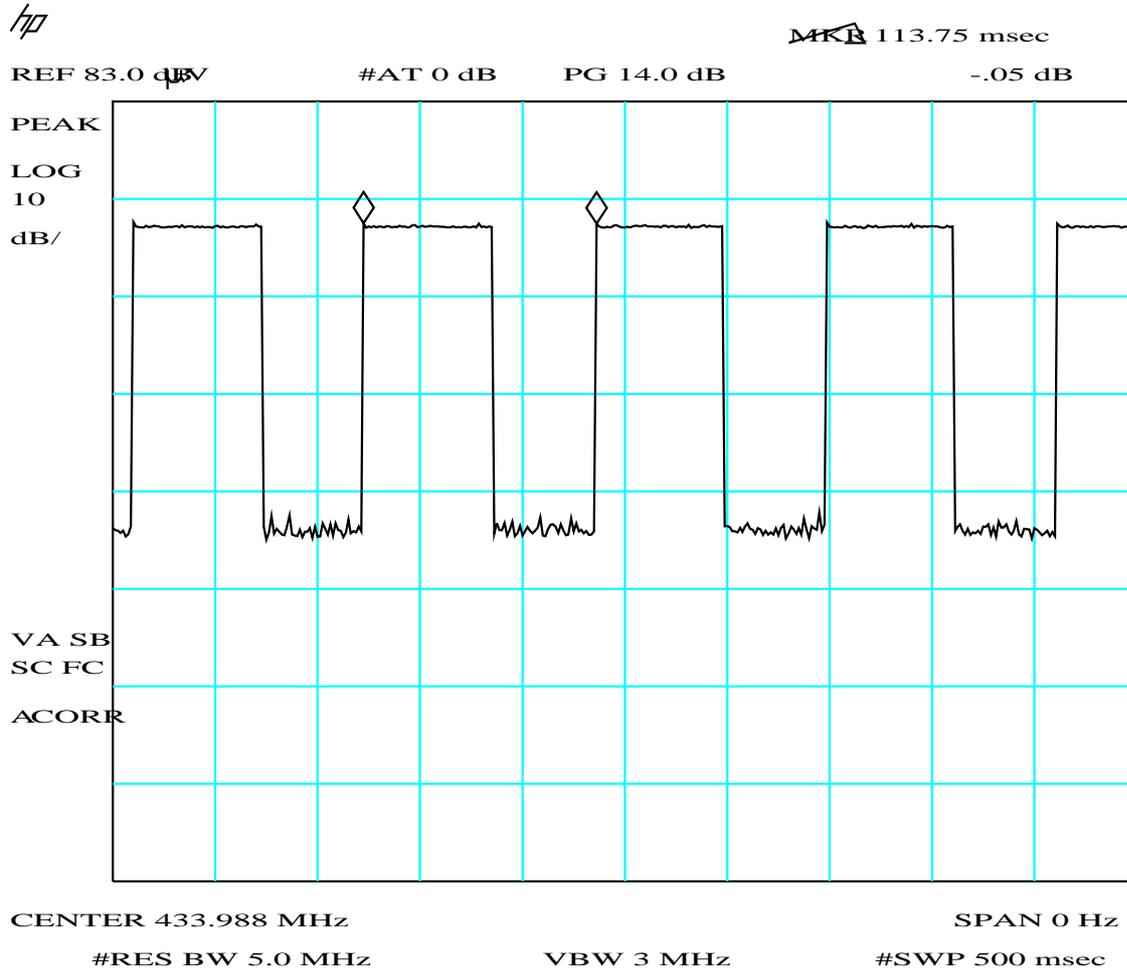

PLOT 3 Duty Cycle

Company:	Controlled Speed Engineering	Product:	CSE035
Date:	27 Jan 05	Test Engineer:	Dave Smith
Test:	FCC Pt 15 Sub Pt C	Limit:	FCC (C)
Notes:			
433.92MHz. Output lowered.			
WITH PREAMP.			
Centred on carrier. Time base.			
Equip: R5,R5B,CBL002,Patch1,CBL003,A5.			
Polarisation:	V + H	Orientation:	0 - 360°
Distance:	3m	Antenna:	Bilog
Height:	1m	Filename:	H5127520.plt
		Operating Mode:	1
		Mod. State:	1

On time = 62.55msec
Total time = 113.75msec

Chase EMS 6.21


Notes

Analyse CSE035 Avg 120kHz

Test: 434MHz

RF level
dBuV/m

CSE035 Avg 1
Average

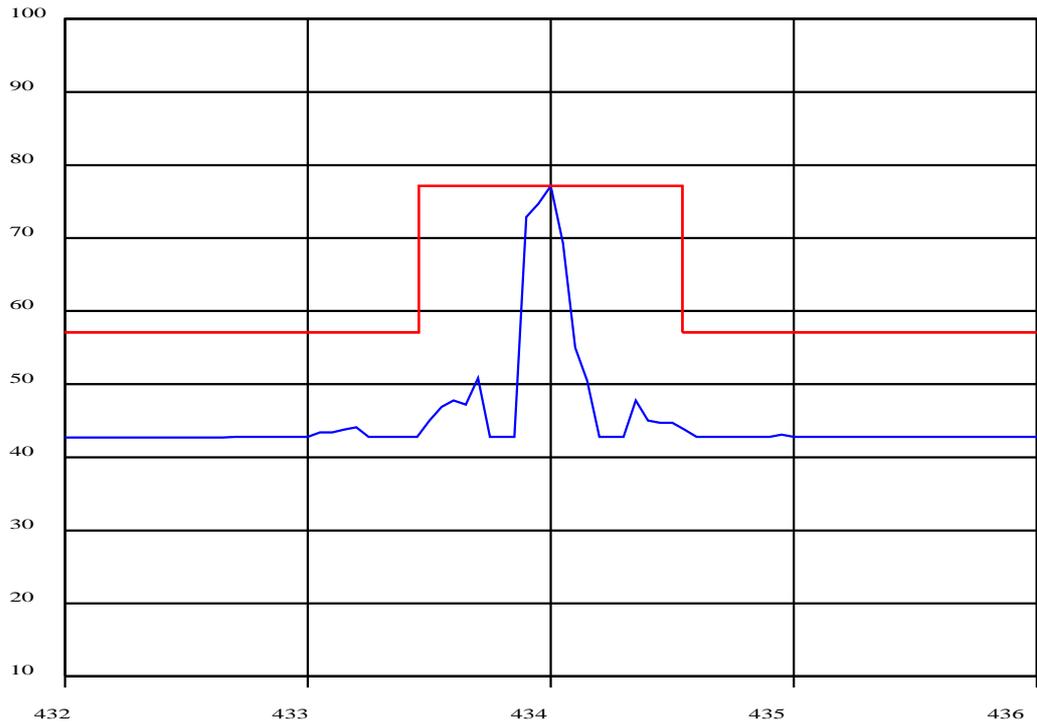

Lin Freq. (432 - 436)MHz

Limit CSE035

PLOT 4 Emission Bandwidth

Centre frequency = 434MHz

Allowable bandwidth = 0.25% of centre frequency = 1.085MHz.

Bandwidth determined by points 20dB down from modulated carrier.

Red line shows allowable bandwidth mask.

Measured with 120kHz average detector with dwell time of 1000msec.