



Test Report

Prepared for: CentraLite Systems

Model: 3315

Description: 3-Series Water Sensor

Serial Number: N/A

FCC ID: T3L-SS043
IC: 12192A-SS043

To

FCC Part 15.247
And
IC RSS-247, Issue 2

Date of Issue: February 12, 2018

On the behalf of the applicant: CentraLite Systems
1000 Cody Road South
Mobile, AL 36695

Attention of: Adel A. Sakla, Hardware Engineer
Ph: (877)466-5483
E-Mail: adel_sakla@centralite.com

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p17c0013



Poona Saber
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested.



Test Report Revision History

| Revision | Date | Revised By | Reason for Revision |
|----------|------------------|-------------|---|
| 1.0 | January 9, 2018 | Poona Saber | Original Document |
| 2.0 | January 31, 2018 | Poona Saber | Updated Annex A Updated page 6 Updated page 9 Added plots for occupied bandwidth Updated test procedure on page 12 Updated test equipment list |
| | | | |
| | | | |



Table of Contents

| <u>Description</u> | <u>Page</u> |
|--|-------------|
| Standard Test Conditions Engineering Practices | 6 |
| Radiated Output Power | 9 |
| Radiated Spurious Emissions | 10 |
| DTS Bandwidth | 11 |
| Transmitter Power Spectral Density (PSD)..... | 14 |
| Test Equipment Utilized | 15 |



ILAC / A2LA

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A



The applicant has been cautioned as to the following

15.21 - Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) - Special Accessories

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



Standard Test Conditions Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.10-2013 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

| Environmental Conditions | |
|--------------------------|-----------------|
| Temperature (°C) | Humidity (%) |
| 17-27 | 29-36 |

EUT Description

Model: 3315

Description: 3-Series Water Sensor

Firmware: NA

Software: NA

Serial Number: NA

Additional Information:

The EUT implements Zigbee technology and it had different power setting for the high channel, channels 11 was set to -9, channel 18 to -8 and and channel 26 was set to -26 for power settings.

EUT Operation during Tests

The EUT was set to transmit at the lowest, middle and highest channel of operation at the maximum available output power for each channel. The control of the power and channel settings were done with a Silicon Labs ISA3 debugger.



Accessories:

| Qty | Description | Manufacturer | Model | S/N |
|-----|---------------|--------------|-------|-----|
| 1 | Debug Adapter | Silicon Labs | ISA3 | N/A |

Cables:

| Qty | Description | Length (M) | Shielding Y/N | Shielded Hood Y/N | Ferrite Y/N |
|-----|--|------------|---------------|-------------------|-------------|
| 1 | 10 Pin connector from the debugger to sensor | <1 | N | N | N |

Modifications: None

15.203: Antenna Requirement:

The antenna is permanently attached to the EUT

The antenna uses a unique coupling

The EUT must be professionally installed

The antenna requirement does not apply



Test Summary

| FCC 15.247 Specification | Test Name | Pass, Fail, N/A | Comments |
|---------------------------------|------------------------------------|------------------------|---------------------------------------|
| 15.247(b) | Peak Output Power | Pass | |
| 15.247(d) | Conducted Spurious Emissions | N/A | EUT does not have any conducted ports |
| 15.247(d), 15.209(a), 15.205 | Radiated Spurious Emissions | Pass | |
| 15.247(d), 15.209(a), 15.205 | Emissions At Band Edges | Pass | |
| 15.247(a)(2) | Occupied Bandwidth | Pass | |
| 15.247(e) | Transmitter Power Spectral Density | Pass | |
| 15.207 | A/C Powerline Conducted Emissions | N/A | EUT is battery operated |

| References | Description |
|---------------------------|---|
| CFR47, Part 15, Subpart B | Unintentional Radiators |
| CFR47, Part 15, Subpart C | Intentional Radiators |
| ANSI C63.10-2013 | American National standard for testing Unlicensed Wireless Devices |
| ANSI C63.4-2014 | Method and Measurements of Radio-Noise Emissions from low-Voltage Electrical and Electronic Equipment in the range 9kHz to 40GHz. |
| ISO/IEC 17025:2005 | General requirements for the Competence of Testing and Calibrations Laboratories |
| KDB 558074 D01 v04 | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247 |



Radiated Output Power

Engineer: Poona Saber

Test Date: 12/19/2017

Test Procedure


The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was set to transmit on the lowest, middle and highest frequency of operation at the maximum power level. The EUT was tested, in 3 orthogonal axis, by rotating it 360° with the receive antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the TX signal levels were maximized. A spectrum analyzer was used to verify that the EUT met the requirements for Output Power.

The Spectrum Analyzer was set to the following:

Span 1.5 x OBW
RBW = 1% to 5% of the OBW
Span \geq 3 x RBW
Sweep time = auto couple
Detector = peak
Trace Mode = max hold

The RF output power was measured using the spectrum analyzer's integrated band power function

Test Setup



Transmitter Output Power Summary Table

| Tuned Frequency (MHz) | Measured Value (dBm) | Specification Limit | Result |
|-----------------------|----------------------|---------------------|--------|
| 2405 | 9.79 | 1 W (36 dBm) | Pass |
| 2445 | 9.95 | 1 W (36 dBm) | Pass |
| 2475 | -12.02 | 1 W (36 dBm) | Pass |



Radiated Spurious Emissions

Engineer: Poona Saber

Test Date: 12/18/2017

Test Procedure Radiated Spurious Emissions: 30 – 1000 MHz

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The output of the transmitter was connected to a non-radiating balance load. The EUT was set to transmit on the lowest, middle and highest frequencies at the maximum power level. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360° with the antennas in both the vertical and horizontal orientation and was raised from 1 to 4 meters to ensure the TX signal levels were maximized.

All emissions from 30 MHz to 1 GHz were examined.

Measured Level includes antenna and receiver cable correction factors.


Correction factors were input into the spectrum analyzer before recording "Measured Level".

RBW = 100 KHz

VBW = 300 KHz

Detector – Quasi Peak

Test Setup



Test Procedure for Radiated Spurious Emissions above 1 GHz


The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The output of the transmitter was connected to a non-radiating balance load. The EUT was set to transmit on the lowest, middle and highest frequencies at the maximum power level. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360° with the antennas in both the vertical and horizontal orientation and was raised from 1 to 4 meters to ensure the TX signal levels were maximized.

RBW = 100 KHz and 1 MHz

VBW = 300 KHz and 3 MHz

Detector – Peak

Test Setup

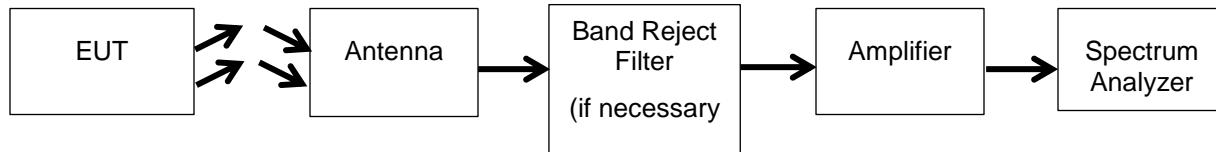

See Annex A for Test Data



DTS Bandwidth

Engineer: Poona Saber

Test Date: 12/19/2017

Test Procedure

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was set to transmit on the lowest, middle and highest frequency of operation at the maximum power level. The EUT was tested, in 3 orthogonal axis, by rotating it 360° with the receive antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the TX signal levels were maximized. A spectrum analyzer was used to verify that the EUT met the requirements for Output Power.

RBW = 100 kHz

VBW \geq 3 x RBW

Peak Detector


Trace mode = max hold

Sweep = auto couple

Span = 1.5 x EBW

The EUT was set to transmit at the lowest, middle and highest channels of the band at the maximum power levels. The maximum width of the emission that was determined by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that were attenuated by 6db and this value was used to determine the width of the carrier. Alternatively, the spectrum analyzer's automatic bandwidth capability was used.

Test Setup



6 dB Occupied Bandwidth Summary


| Frequency (MHz) | Measured Bandwidth (MHz) | Specification Limit (kHz) | Result |
|-----------------|--------------------------|---------------------------|--------|
| 2405 | 1.53 | \geq 500 | Pass |
| 2445 | 1.59 | \geq 500 | Pass |
| 2475 | 1.61 | \geq 500 | Pass |

99% Bandwidth Summary


| Frequency (MHz) | Measured Bandwidth (MHz) | Result |
|-----------------|--------------------------|--------|
| 2405 | 2.48 | Pass |
| 2445 | 2.44 | Pass |
| 2475 | 4.22 | Pass |



Low Channel

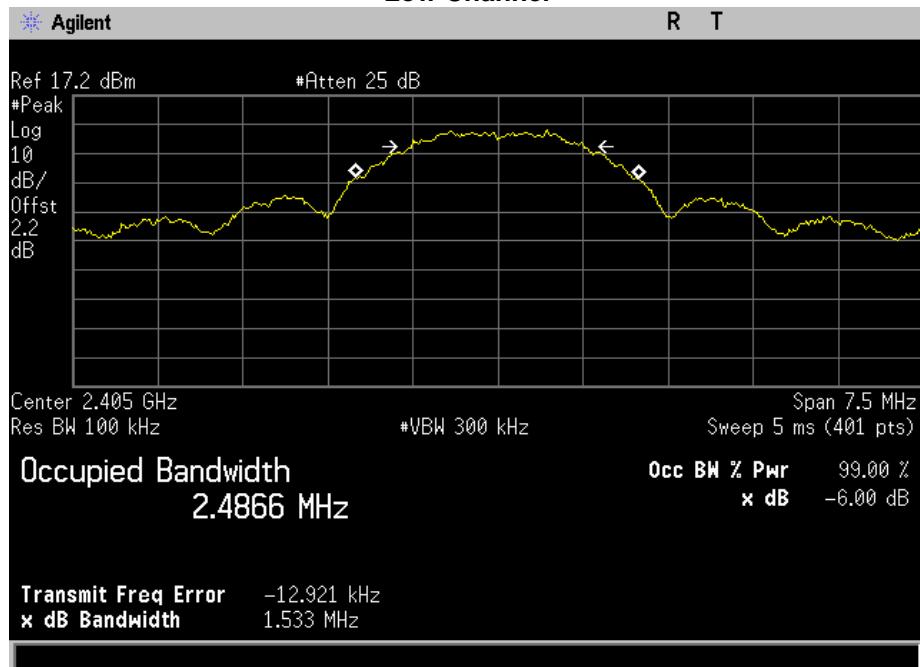


Mid Channel

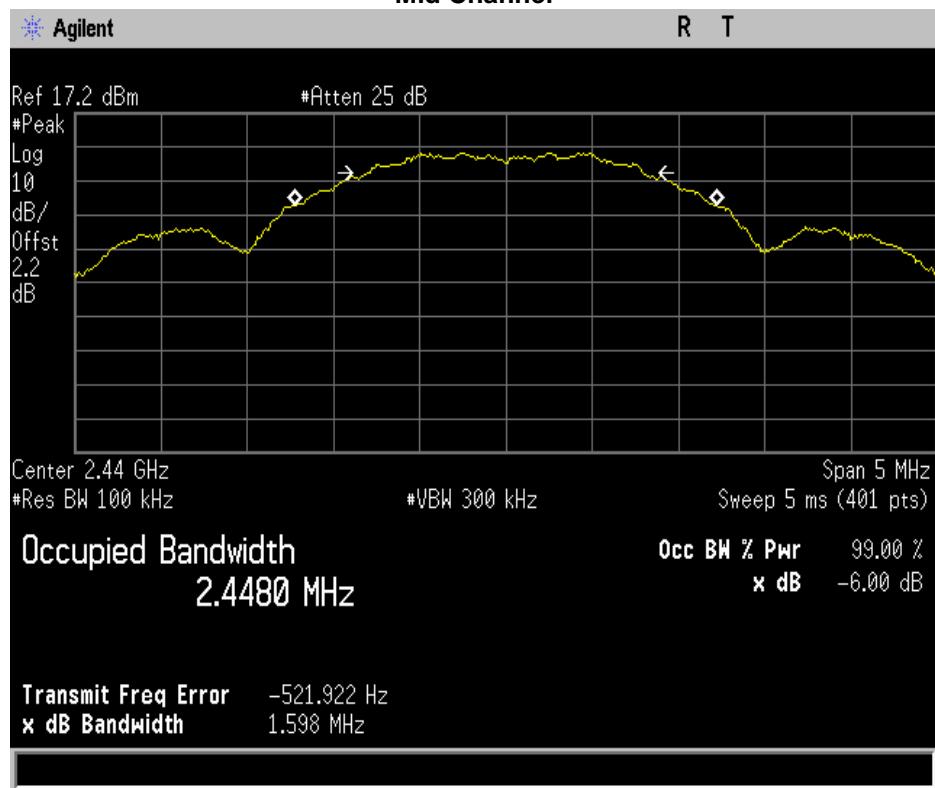



High Channel

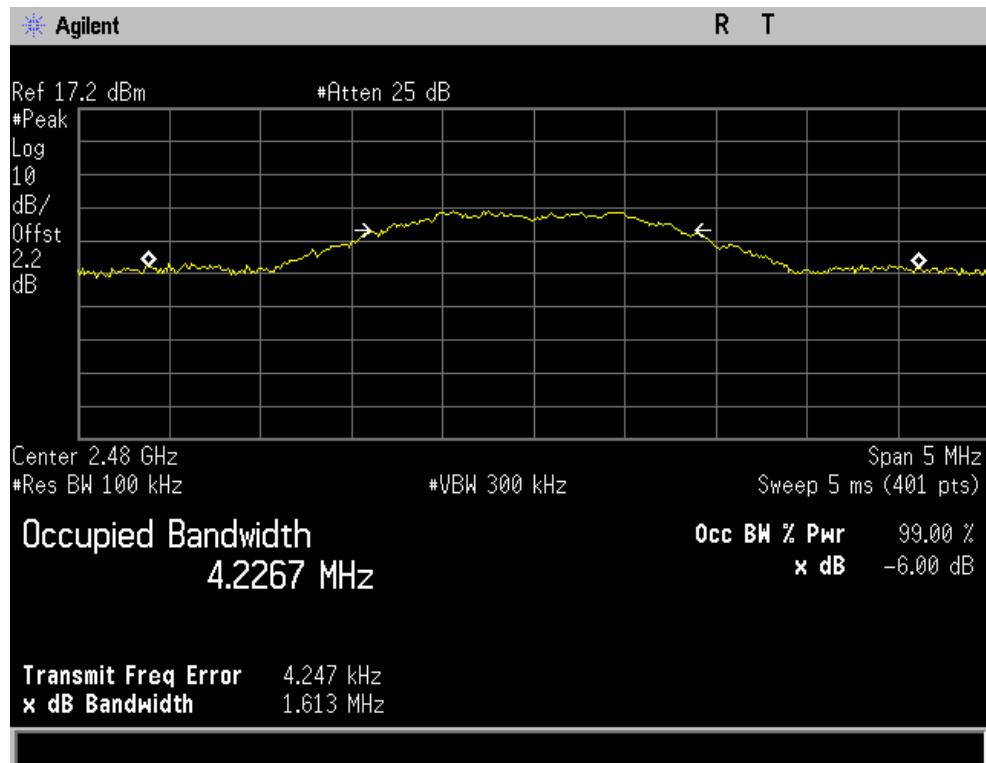



Transmitter Power Spectral Density (PSD)

Engineer: Poona Saber

Test Date: 12/19/2017

Test Procedure

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was set to transmit on the lowest, middle and highest frequency of operation at the maximum power level. The EUT was tested, in 3 orthogonal axis, by rotating it 360° with the receive antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the TX signal levels were maximized

DTS channel center frequency

Span 1.5 x DTS bandwidth

RBW =3 kHz ≤ RBW ≤ 100 kHz

VBW ≥ 3 x RBW


Peak Detector

Sweep time = auto couple

Trace mode = max hold

The EUT was set to transmit at the lowest, middle and highest channels of the band at the maximum power levels. Once the trace has stabilized the peak marker was used to determine the peak power spectral density.

Test Setup



PSD Summary

| Frequency (MHz) | Measured Data (dBm) | Specification Limit (dBm) | Result |
|-----------------|---------------------|---------------------------|--------|
| 2405 | -2.06 | 8 | Pass |
| 2445 | -1.11 | 8 | Pass |
| 2475 | -21.66 | 8 | Pass |

**Test Equipment Utilized**

| Description | Manufacturer | Model # | CT Asset # | Last Cal Date | Cal Due Date |
|---------------------------------------|--------------|-------------------------------|------------|---------------|--------------|
| Horn Antenna | ARA | DRG-118/A | i00271 | 6/16/16 | 6/16/18 |
| Humidity / Temp Meter | Newport | IBTHX-W-5 | i00282 | 6/9/17 | 6/9/18 |
| Bi-Log Antenna | Schaffner | CBL 6111D | i00349 | 8/3/16 | 8/3/18 |
| EMI Analyzer | Agilent | E7405A | i00379 | 2/22/17 | 2/22/18 |
| 3 Meter Semi-Anechoic Chamber | Panashield | 3 Meter Semi-Anechoic Chamber | i00428 | 8/15/16 | 8/15/19 |
| Preamplifier for 1-18GHz horn antenna | Miteq | AFS44 00101 400 23-10P-44 | i00509 | N/A | N/A |
| Horn Antenna (18-40 GHz) | EMCO | 3116 | i00085 | 2/6/17 | 2/6/18 |

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT