

# FCC RF Test Report

APPLICANT : Quanta Computer Inc  
EQUIPMENT : 802.11b/g, PCI-E Half-sized mini card  
BRAND NAME : QMI  
MODEL NAME : EM113-MV  
FCC ID : T5U-EM113MV  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : Digital Transmission System (DTS)

The product was installed into Laptop Computer (Brand Name: OLPC, Model Name: XO-1.75; XO-1.75HS) during test.

The product was received on Nov. 16, 2011 and completely tested on Dec. 07, 2011. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



---

Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



## TABLE OF CONTENTS

|                                                    |    |
|----------------------------------------------------|----|
| REVISION HISTORY.....                              | 3  |
| SUMMARY OF TEST RESULT .....                       | 4  |
| 1 GENERAL DESCRIPTION .....                        | 5  |
| 1.1 Applicant.....                                 | 5  |
| 1.2 Manufacturer.....                              | 5  |
| 1.3 Feature of Equipment Under Test .....          | 5  |
| 1.4 Testing Site.....                              | 7  |
| 1.5 Applied Standards .....                        | 7  |
| 1.6 Ancillary Equipment List .....                 | 7  |
| 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... | 8  |
| 2.1 RF Power .....                                 | 8  |
| 2.2 Test Mode.....                                 | 9  |
| 2.3 Connection Diagram of Test System.....         | 10 |
| 2.4 RF Utility .....                               | 10 |
| 3 TEST RESULT.....                                 | 11 |
| 3.1 6dB Bandwidth Measurement .....                | 11 |
| 3.2 Output Power Measurement.....                  | 16 |
| 3.3 Band Edges Measurement.....                    | 18 |
| 3.4 Spurious Emission Measurement.....             | 25 |
| 3.5 Power Spectral Density Measurement .....       | 32 |
| 3.6 AC Conducted Emission Measurement.....         | 37 |
| 3.7 Radiated Emission Measurement.....             | 41 |
| 3.8 Antenna Requirements.....                      | 60 |
| 4 LIST OF MEASURING EQUIPMENT .....                | 61 |
| 5 UNCERTAINTY OF EVALUATION.....                   | 62 |
| APPENDIX A. PHOTOGRAPHS OF EUT                     |    |
| APPENDIX B. SETUP PHOTOGRAPHS                      |    |

## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FR172910   | Rev. 01 | Initial issue of report | Dec. 12, 2011 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule              | Description                   | Limit                    | Result | Remark                                  |
|----------------|-----------------------|-------------------------------|--------------------------|--------|-----------------------------------------|
| 3.1            | 15.247(a)(2)          | 6dB Bandwidth                 | $\geq 0.5\text{MHz}$     | Pass   | -                                       |
| 3.2            | 15.247(b)             | Power Output                  | $\leq 30\text{dBm}$      | Pass   | -                                       |
| 3.3            | 15.247(d)             | Frequency Band Edges          | $\leq 20\text{dBc}$      | Pass   | -                                       |
| 3.4            | 15.247(d)             | Spurious Emission             | $< 20\text{ dBc}$        | Pass   | -                                       |
| 3.5            | 15.247(e)             | Power Spectral Density        | $\leq 8\text{dBm}$       | Pass   | -                                       |
| 3.6            | 15.207                | AC Conducted Emission         | 15.207(a)                | Pass   | Under limit<br>9.94 dB at<br>0.15 MHz   |
| 3.7            | 15.247(d)             | Transmitter Radiated Emission | 15.209(a) &<br>15.247(d) | Pass   | Under limit<br>2.67 dB at<br>215.22 MHz |
| 3.8            | 15.203 &<br>15.247(b) | Antenna Requirement           | N/A                      | Pass   | -                                       |

# 1 General Description

## 1.1 Applicant

Quanta Computer Inc

No.188, Wen Hwa 2nd Rd., Kuei Shan Hsiang, Tao Yuan Shien, TaiWan

## 1.2 Manufacturer

Quanta Computer Inc

No.188, Wen Hwa 2nd Rd., Kuei Shan Hsiang, Tao Yuan Shien, TaiWan

## 1.3 Feature of Equipment Under Test

| Product Feature & Specification   |                                                                                      |
|-----------------------------------|--------------------------------------------------------------------------------------|
| Equipment                         | 802.11b/g, PCI-E Half-sized mini card                                                |
| Model Name                        | EM113-MV                                                                             |
| FCC ID                            | T5U-EM113MV                                                                          |
| Tx/Rx Frequency Range             | 2400 MHz ~ 2483.5 MHz                                                                |
| Number of Channels                | 11                                                                                   |
| Carrier Frequency of Each Channel | 2412+(n-1)*5 MHz; n=1~11                                                             |
| Channel Spacing                   | 5 MHz                                                                                |
| Maximum Output Power to Antenna   | 802.11b : 18.85 dBm (0.077 W)<br>802.11g : 22.31 dBm (0.170 W)                       |
| Antenna Type                      | PIFA Antenna with gain 3.15 dBi                                                      |
| HW Version                        | N/A                                                                                  |
| SW Version                        | N/A                                                                                  |
| Type of Modulation                | 802.11b : DSSS (BPSK / QPSK / CCK)<br>802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) |
| EUT Stage                         | Identical Prototype                                                                  |

### Remark:

1. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
2. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
3. The difference between sample 1(XO-1.75HS) and sample 2 (XO-1.75) is only for keyboard. The others are the same including circuit design, PCB board, structure and all components. It is special to declare. After pre-scan two types of EUT, there is no any difference for RF performance, so we only choose sample 1 (XO-1.75HS) to all test.

**List of Accessory:**

| Specification of Accessory |            |             |
|----------------------------|------------|-------------|
| AC Adapter 1               | Brand Name | DARFON      |
|                            | Model Name | BB0J-C      |
| AC Adapter 2               | Brand Name | Bestec      |
|                            | Model Name | NA0241WAA   |
| AC Adapter 3               | Brand Name | DARFON      |
|                            | Model Name | BU24-1203   |
| AC Adapter 4               | Brand Name | Bestec      |
|                            | Model Name | BT-AG250SDF |
| Battery                    | Brand Name | OLPC        |
|                            | Model Name | CL1         |

**Remark:** 1, For accessories equipped with this EUT, please refer to Appendix A.

2, The accessories will affect EMC test items, and we evaluation all tests on 15B report. Only choose the worst case to evaluation RF test.

## 1.4 Testing Site

|                           |                                                                                                                  |         |           |
|---------------------------|------------------------------------------------------------------------------------------------------------------|---------|-----------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL (KUNSHAN) INC.                                                                             |         |           |
| <b>Test Site Location</b> | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.<br>TEL: +86-0512-5790-0158<br>FAX: +86-0512-5790-0958 |         |           |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                          |         |           |
|                           | TH01-KS                                                                                                          | CO01-KS | 03CH01-KS |

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ANSI C63.4-2003

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

## 1.6 Ancillary Equipment List

| Item | Equipment       | Trade Name | Model Name | FCC ID       | Data Cable      | Power Cord                                                 |
|------|-----------------|------------|------------|--------------|-----------------|------------------------------------------------------------|
| 1.   | DC Power Supply | GW         | GPS-30300  | N/A          | N/A             | Unshielded, 1.8 m                                          |
| 2.   | WLAN AP         | D-Link     | DIR-855    | KA2DIR5855A2 | N/A             | Unshielded, 1.8 m                                          |
| 3.   | Notebook        | DELL       | P08S       | QDS-BRCM1030 | N/A             | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 4.   | SD Card         | Kingston   | SD8/8GB    | N/A          | N/A             | N/A                                                        |
| 5.   | Earphone        | INTOPIC    | Jazz-278   | FCC DoC      | Shielded, 2.2 m | N/A                                                        |
| 6.   | iPod            | Apple      | A1199      | FCC DoC      | Shielded, 1.0 m | N/A                                                        |
| 7.   | iPod            | Apple      | A1199      | FCC DoC      | Shielded, 1.0 m | N/A                                                        |
| 8.   | iPod            | Apple      | A1199      | FCC DoC      | Shielded, 1.0 m | N/A                                                        |

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

| Channel | Frequency | 2.4GHz 802.11b RF Power (dBm) |        |          |         |
|---------|-----------|-------------------------------|--------|----------|---------|
|         |           | DSSS Data Rate                |        |          |         |
|         |           | 1 Mbps                        | 2 Mbps | 5.5 Mbps | 11 Mbps |
| CH 01   | 2412 MHz  | 17.38                         | 17.27  | 16.92    | 16.86   |
| CH 06   | 2437 MHz  | 16.19                         | 16.15  | 15.87    | 15.68   |
| CH 11   | 2462 MHz  | 18.85                         | 18.62  | 18.32    | 18.12   |

| Channel | Frequency | 2.4GHz 802.11g RF Power (dBm) |        |         |         |         |         |         |         |
|---------|-----------|-------------------------------|--------|---------|---------|---------|---------|---------|---------|
|         |           | OFDM Data Rate                |        |         |         |         |         |         |         |
|         |           | 6 Mbps                        | 9 Mbps | 12 Mbps | 18 Mbps | 24 Mbps | 36 Mbps | 48 Mbps | 54 Mbps |
| CH 01   | 2412 MHz  | 20.16                         | 19.91  | 19.57   | 19.42   | 19.86   | 19.72   | 19.55   | 19.61   |
| CH 06   | 2437 MHz  | 21.68                         | 21.25  | 20.81   | 20.65   | 20.96   | 20.69   | 20.31   | 20.63   |
| CH 11   | 2462 MHz  | 22.31                         | 22.13  | 21.63   | 21.43   | 22.02   | 21.86   | 21.24   | 21.59   |

**Remark:**

1. The data rates of WLAN 802.11b/g were set in 1Mbps for 802.11b, 6Mbps for 802.11g for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

## 2.2 Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.


| Test Cases                                                                    |                                                                                                                                                                                                  |                                                                                                                                                                                              |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Item                                                                     | 802.11b<br>(Modulation : DSSS)                                                                                                                                                                   | 802.11g<br>(Modulation : OFDM)                                                                                                                                                               |
| Conducted TCs                                                                 | Mode 1 : 802.11b CH01_2412 MHz<br>Mode 2 : 802.11b CH06_2437 MHz<br>Mode 3 : 802.11b CH11_2462 MHz                                                                                               | Mode 4: 802.11g_CH01_2412 MHz<br>Mode 5: 802.11g_CH06_2437 MHz<br>Mode 6: 802.11g_CH11_2462 MHz                                                                                              |
| Radiated TCs                                                                  | Mode 1 : 802.11b CH01_2412 MHz in Laptop Mode<br>Mode 2 : 802.11b CH06_2437 MHz in Laptop Mode<br>Mode 3 : 802.11b CH11_2462 MHz in Laptop Mode<br>Mode 4 : 802.11b CH06_2437 MHz in Tablet Mode | Mode 5: 802.11g_CH01_2412 MHz in Laptop Mode<br>Mode 6: 802.11g_CH06_2437 MHz in Laptop Mode<br>Mode 7: 802.11g_CH11_2462 MHz in Laptop Mode<br>Mode 8: 802.11g_CH11_2462 MHz in Tablet Mode |
| AC Conducted Emission                                                         | Mode 1 : WLAN Link + Adapter 4 + TC                                                                                                                                                              |                                                                                                                                                                                              |
| Remark: TC stands for Test Configuration, and consists of iPods and earphone. |                                                                                                                                                                                                  |                                                                                                                                                                                              |

## 2.3 Connection Diagram of Test System

### <Radiation>

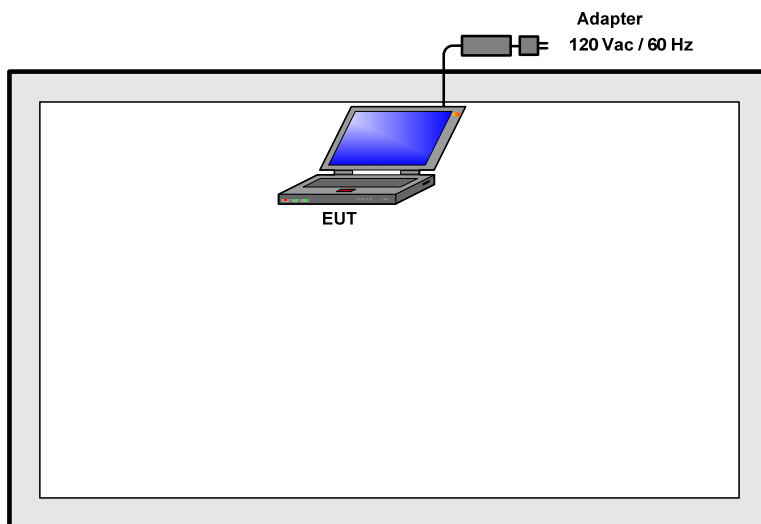

### <Conduction>

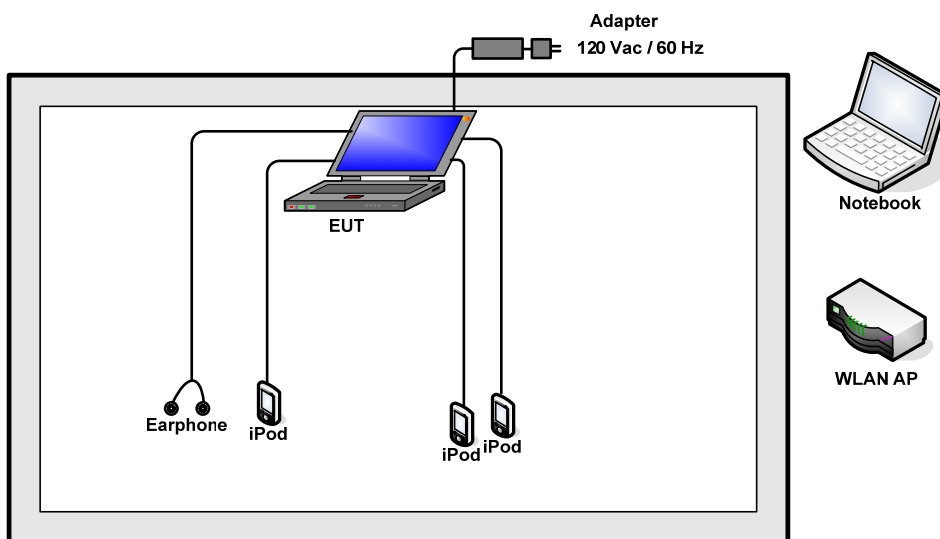

## 2.4 RF Utility

The programmed RF utility is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.  
In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

##### 3.1.4 Test Setup

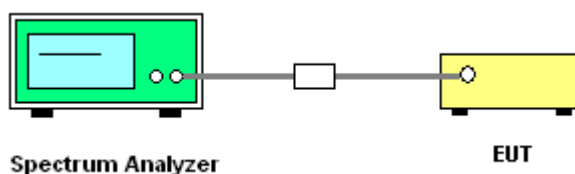


### 3.1.5 Test Result of 6dB Bandwidth

|                 |              |                     |        |
|-----------------|--------------|---------------------|--------|
| Test Mode :     | Mode 1, 2, 3 | Temperature :       | 24~25℃ |
| Test Engineer : | Zhi Lu       | Relative Humidity : | 46~47% |

| Channel | Frequency (MHz) | 802.11b<br>6dB Bandwidth (MHz) | 6dB Bandwidth<br>Min. Limit (MHz) | Pass/Fail |
|---------|-----------------|--------------------------------|-----------------------------------|-----------|
| 01      | 2412            | 9.72                           | 0.5                               | Pass      |
| 06      | 2437            | 9.72                           | 0.5                               | Pass      |
| 11      | 2462            | 10.04                          | 0.5                               | Pass      |

**Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01**

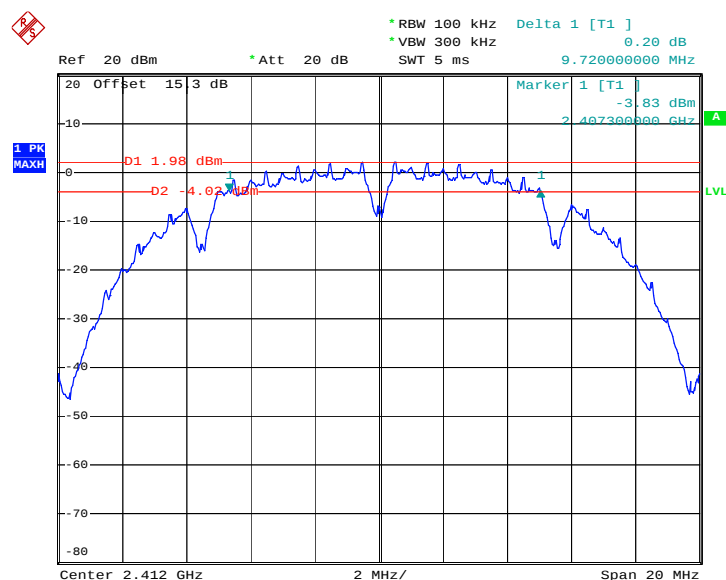

Date: 2.DEC.2011 16:59:47




Date: 2.DEC.2011 17:15:46

[illegible]


Date: 2.DEC.2011 17:30:30

|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | Mode 4, 5, 6 | Temperature :       | 24~25°C |
| Test Engineer : | Zhi Lu       | Relative Humidity : | 46~47%  |


| Channel | Frequency<br>(MHz) | 802.11g<br>6dB Bandwidth (MHz) | 6dB Bandwidth<br>Min. Limit (MHz) | Pass/Fail |
|---------|--------------------|--------------------------------|-----------------------------------|-----------|
| 01      | 2412               | 16.44                          | 0.5                               | Pass      |
| 06      | 2437               | 16.48                          | 0.5                               | Pass      |
| 11      | 2462               | 16.52                          | 0.5                               | Pass      |

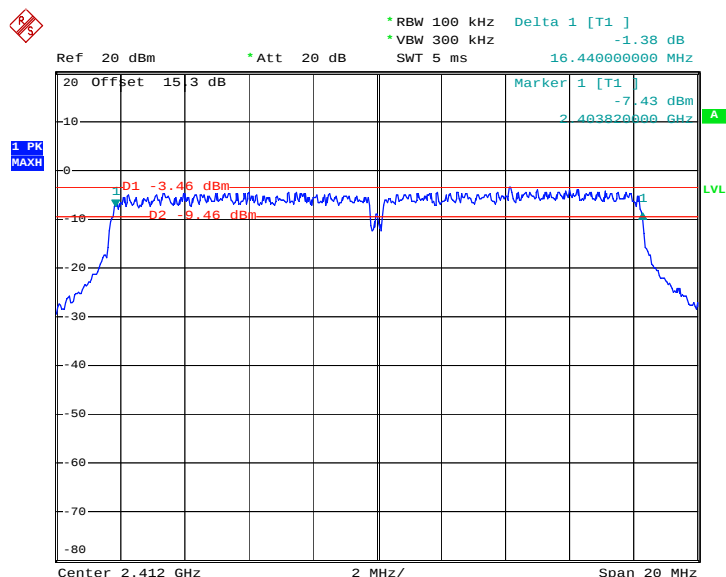**Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01**


Date: 2.DEC.2011 18:03:19

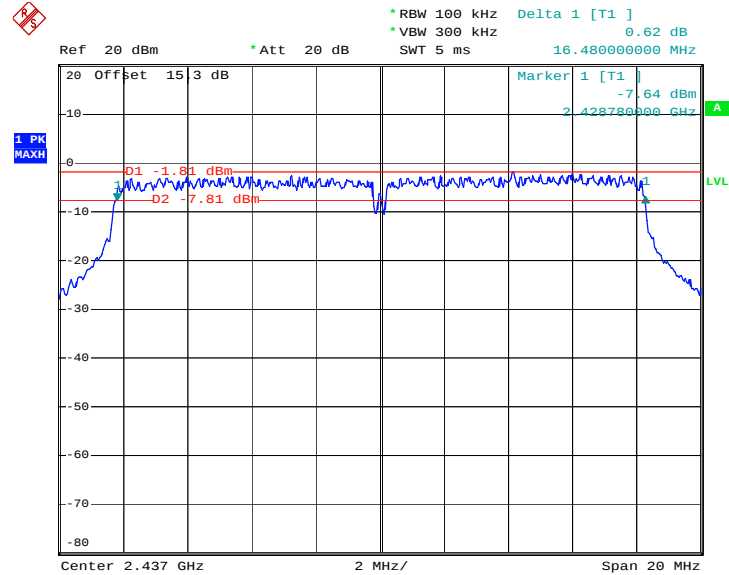**Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06**


Date: 2.DEC.2011 18:27:39

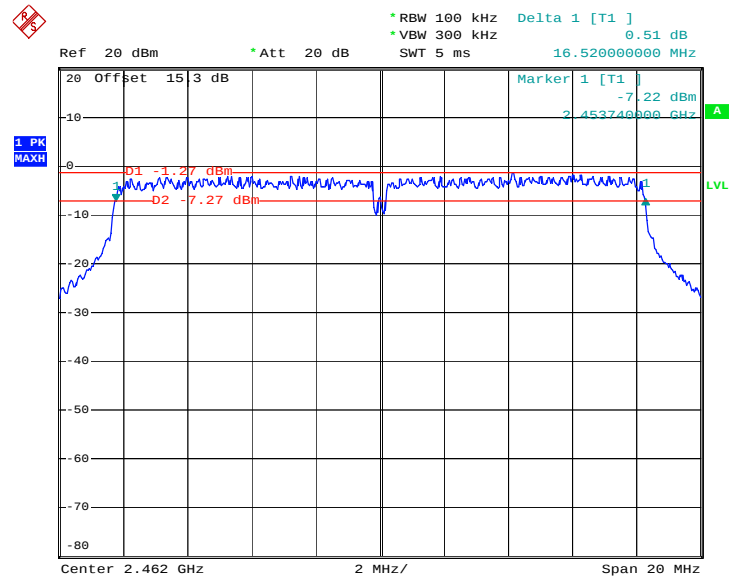**Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11**


Date: 2.DEC.2011 18:44:07

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

### 3.2.4 Test Setup

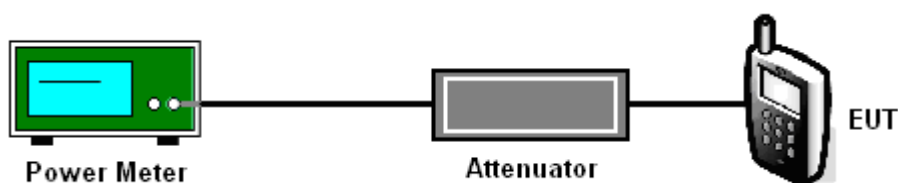

**3.2.5 Test Result of Output Power**

|                        |              |                            |        |
|------------------------|--------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 1, 2, 3 | <b>Temperature :</b>       | 24~25℃ |
| <b>Test Engineer :</b> | Zhi Lu       | <b>Relative Humidity :</b> | 46~47% |

| Channel | Frequency (MHz) | 802.11b<br>Measured Output Power (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------------------|-------------------|-----------|
| 01      | 2412            | 17.38                                  | 30                | Pass      |
| 06      | 2437            | 16.19                                  | 30                | Pass      |
| 11      | 2462            | 18.85                                  | 30                | Pass      |

|                        |              |                            |        |
|------------------------|--------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 4, 5, 6 | <b>Temperature :</b>       | 24~25℃ |
| <b>Test Engineer :</b> | Zhi Lu       | <b>Relative Humidity :</b> | 46~47% |

| Channel | Frequency (MHz) | 802.11g<br>Measured Output Power (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------------------|-------------------|-----------|
| 01      | 2412            | 20.16                                  | 30                | Pass      |
| 06      | 2437            | 21.68                                  | 30                | Pass      |
| 11      | 2462            | 22.31                                  | 30                | Pass      |

### 3.3 Band Edges Measurement

#### 3.3.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

#### 3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

### 3.3.4 Test Setup

#### <Radiated Band Edges>

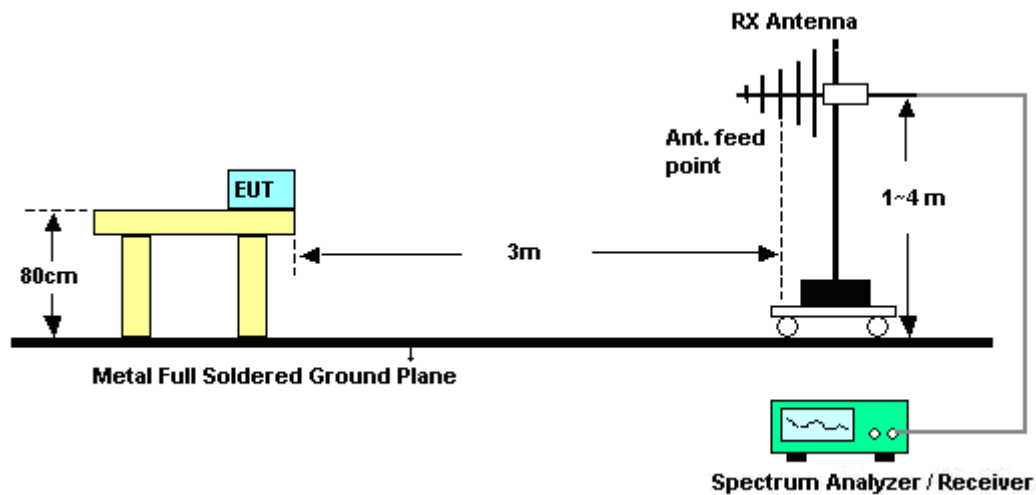

#### <Conducted Band Edges>

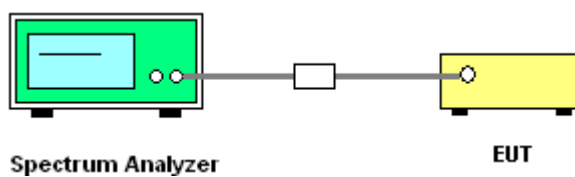

### 3.3.5 Test Result of Radiated Band Edges

802.11b CH01\_2412 MHz in Laptop Mode

|                |         |                     |         |
|----------------|---------|---------------------|---------|
| Test Mode :    | Mode 1  | Temperature :       | 20~21℃  |
| Test Band :    | 802.11b | Relative Humidity : | 41~42%  |
| Test Channel : | 01      | Test Engineer :     | Jack Li |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2386.38                       | 54.94               | -19.06                  | 74                          | 52.66                     | 32.86                       | 3.47                    | 34.05                      | 127                  | 57                      | Peak    |
| 2386.38                       | 43.52               | -10.48                  | 54                          | 41.24                     | 32.86                       | 3.47                    | 34.05                      | 127                  | 57                      | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2386.76                     | 56.28               | -17.72                  | 74                          | 54                        | 32.86                       | 3.47                    | 34.05                      | 160                  | 360                     | Peak    |
| 2386.76                     | 44.48               | -9.52                   | 54                          | 42.2                      | 32.86                       | 3.47                    | 34.05                      | 160                  | 360                     | Average |

802.11b CH11\_2462 MHz in Laptop Mode

|                |         |                     |         |
|----------------|---------|---------------------|---------|
| Test Mode :    | Mode 3  | Temperature :       | 20~21℃  |
| Test Band :    | 802.11b | Relative Humidity : | 41~42%  |
| Test Channel : | 11      | Test Engineer :     | Jack Li |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2487.84                       | 57.93               | -16.07                  | 74                          | 55.39                     | 33.05                       | 3.72                    | 34.23                      | 116                  | 0                       | Peak    |
| 2487.84                       | 43.68               | -10.32                  | 54                          | 41.14                     | 33.05                       | 3.72                    | 34.23                      | 116                  | 0                       | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2484.61                     | 58.08               | -15.92                  | 74                          | 55.59                     | 33.01                       | 3.68                    | 34.2                       | 100                  | 354                     | Peak    |
| 2484.61                     | 47.89               | -6.11                   | 54                          | 45.4                      | 33.01                       | 3.68                    | 34.2                       | 100                  | 354                     | Average |

**802.11b CH06\_2437 MHz in Tablet Mode**

|                       |         |                            |         |
|-----------------------|---------|----------------------------|---------|
| <b>Test Mode :</b>    | Mode 4  | <b>Temperature :</b>       | 20~21℃  |
| <b>Test Band :</b>    | 802.11b | <b>Relative Humidity :</b> | 41~42%  |
| <b>Test Channel :</b> | 06      | <b>Test Engineer :</b>     | Jack Li |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2485.94                       | 53.21               | -20.79                  | 74                          | 50.72                     | 33.01                       | 3.68                    | 34.2                       | 101                  | 339                     | Peak    |
| 2485.94                       | 41.48               | -12.52                  | 54                          | 38.99                     | 33.01                       | 3.68                    | 34.2                       | 101                  | 339                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2485.75                     | 59.26               | -14.74                  | 74                          | 56.77                     | 33.01                       | 3.68                    | 34.2                       | 100                  | 15                      | Peak    |
| 2485.75                     | 46.55               | -7.45                   | 54                          | 44.06                     | 33.01                       | 3.68                    | 34.2                       | 100                  | 15                      | Average |

**802.11g\_CH01\_2412 MHz in Laptop Mode**

|                       |         |                            |         |
|-----------------------|---------|----------------------------|---------|
| <b>Test Mode :</b>    | Mode 5  | <b>Temperature :</b>       | 20~21℃  |
| <b>Test Band :</b>    | 802.11g | <b>Relative Humidity :</b> | 41~42%  |
| <b>Test Channel :</b> | 01      | <b>Test Engineer :</b>     | Jack Li |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2390                          | 56.65               | -17.35                  | 74                          | 54.37                     | 32.86                       | 3.47                    | 34.05                      | 100                  | 36                      | Peak    |
| 2390                          | 43.93               | -10.07                  | 54                          | 41.65                     | 32.86                       | 3.47                    | 34.05                      | 100                  | 36                      | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2390                        | 55.54               | -18.46                  | 74                          | 53.26                     | 32.86                       | 3.47                    | 34.05                      | 100                  | 278                     | Peak    |
| 2390                        | 42.72               | -11.28                  | 54                          | 40.44                     | 32.86                       | 3.47                    | 34.05                      | 100                  | 278                     | Average |



## 802.11g\_CH06\_2437 MHz in Laptop Mode

|                |         |                     |         |
|----------------|---------|---------------------|---------|
| Test Mode :    | Mode 6  | Temperature :       | 20~21℃  |
| Test Band :    | 802.11g | Relative Humidity : | 41~42%  |
| Test Channel : | 06      | Test Engineer :     | Jack Li |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2498.67                       | 56.8                | -17.2                   | 74                          | 54.26                     | 33.05                       | 3.72                    | 34.23                      | 100                  | 338                     | Peak    |
| 2498.67                       | 44.62               | -9.38                   | 54                          | 42.08                     | 33.05                       | 3.72                    | 34.23                      | 100                  | 338                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2492.21                     | 57.2                | -16.8                   | 74                          | 54.66                     | 33.05                       | 3.72                    | 34.23                      | 147                  | 7                       | Peak    |
| 2492.21                     | 44.12               | -9.88                   | 54                          | 41.58                     | 33.05                       | 3.72                    | 34.23                      | 147                  | 7                       | Average |

## 802.11g\_CH11\_2462 MHz in Tablet Mode

|                |         |                     |         |
|----------------|---------|---------------------|---------|
| Test Mode :    | Mode 8  | Temperature :       | 20~21℃  |
| Test Band :    | 802.11g | Relative Humidity : | 41~42%  |
| Test Channel : | 11      | Test Engineer :     | Jack Li |


| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2486.89                       | 60.11               | -13.89                  | 74                          | 57.62                     | 33.01                       | 3.68                    | 34.2                       | 100                  | 339                     | Peak    |
| 2486.89                       | 43.2                | -10.8                   | 54                          | 40.71                     | 33.01                       | 3.68                    | 34.2                       | 100                  | 339                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.5                      | 66.3                | -7.7                    | 74                          | 63.81                     | 33.01                       | 3.68                    | 34.2                       | 100                  | 337                     | Peak    |
| 2483.5                      | 50.36               | -3.64                   | 54                          | 47.87                     | 33.01                       | 3.68                    | 34.2                       | 100                  | 337                     | Average |

### 3.3.6 Test Plots of Conducted Band Edges


|                |              |                     |         |
|----------------|--------------|---------------------|---------|
| Test Mode :    | Mode 1 and 3 | Temperature :       | 24~25°C |
| Test Band :    | 802.11b      | Relative Humidity : | 46~47%  |
| Test Channel : | 01 and 11    | Test Engineer :     | Zhi Lu  |

**Low Band Edge Plot on 802.11b Channel 01**

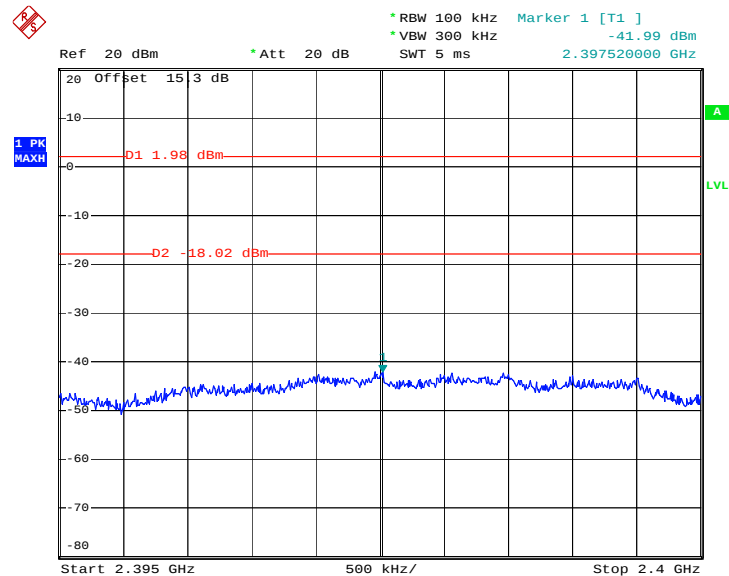

Date: 2.DEC.2011 17:01:04

**High Band Edge Plot on 802.11b Channel 11**

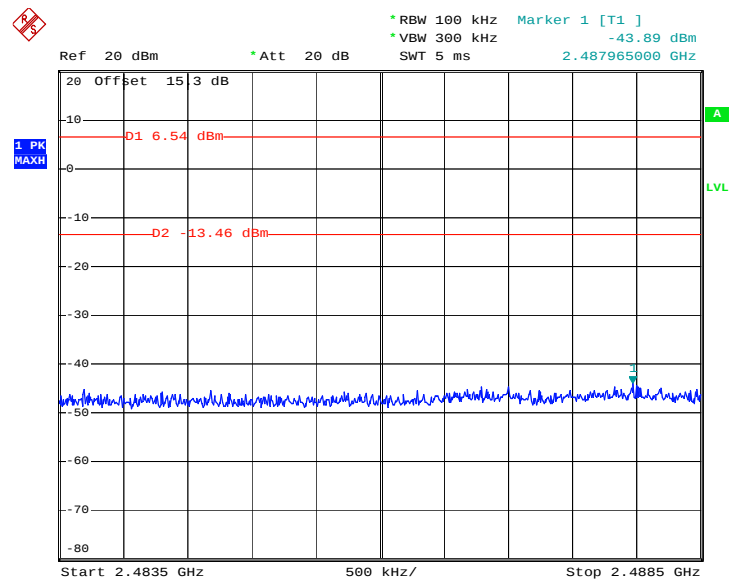


Date: 2.DEC.2011 17:31:24




|                |              |                     |         |
|----------------|--------------|---------------------|---------|
| Test Mode :    | Mode 4 and 6 | Temperature :       | 24~25°C |
| Test Band :    | 802.11g      | Relative Humidity : | 46~47%  |
| Test Channel : | 01 and 11    | Test Engineer :     | Zhi Lu  |

Low Band Edge Plot on 802.11g Channel 01

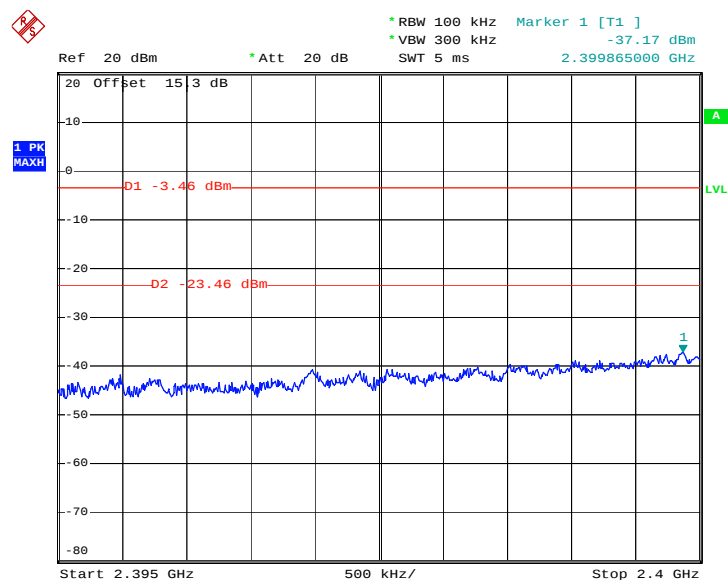

Date: 2.DEC.2011 18:04:49

High Band Edge Plot on 802.11g Channel 11

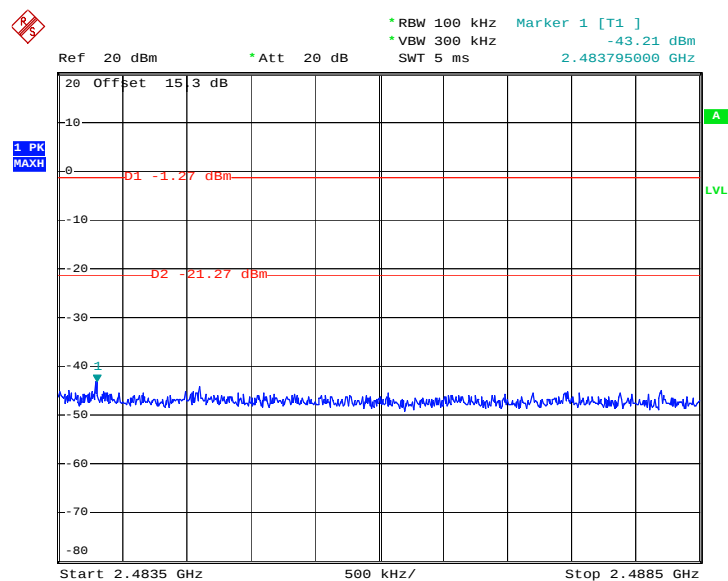

Date: 2.DEC.2011 18:45:01

### 3.4 Spurious Emission Measurement

#### 3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


#### 3.4.4 Test Setup

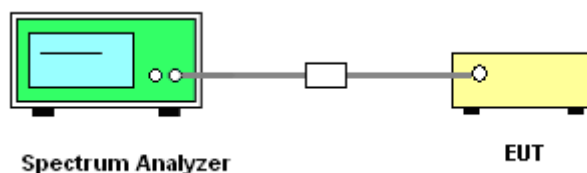

### 3.4.5 Test Plots of Spurious Emission


|                |         |                     |         |
|----------------|---------|---------------------|---------|
| Test Mode :    | Mode 1  | Temperature :       | 24~25°C |
| Test Band :    | 802.11b | Relative Humidity : | 46~47%  |
| Test Channel : | 01      | Test Engineer :     | Zhi Lu  |

**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**

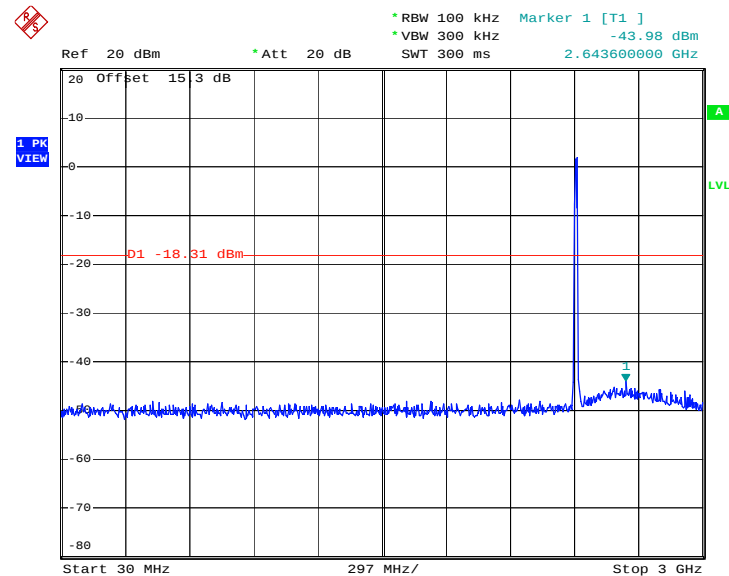


Date: 2.DEC.2011 17:02:28

**Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz**

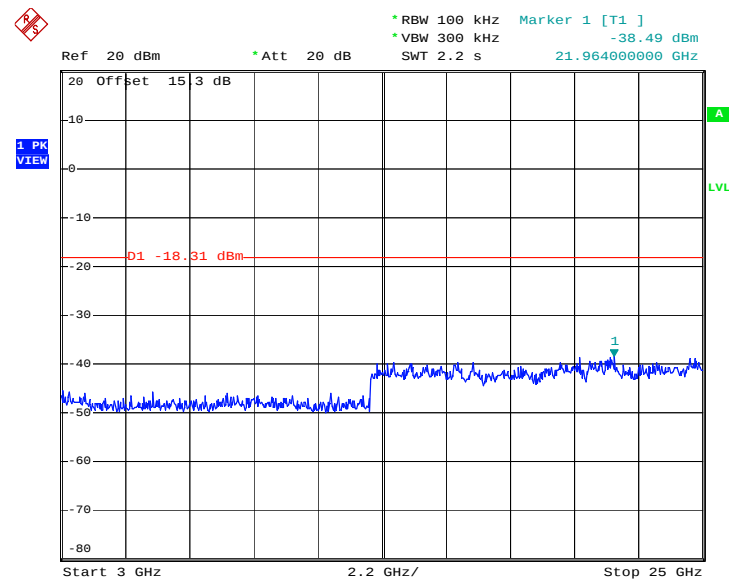


Date: 2.DEC.2011 17:02:45

|                |         |                     |         |
|----------------|---------|---------------------|---------|
| Test Mode :    | Mode 2  | Temperature :       | 24~25°C |
| Test Band :    | 802.11b | Relative Humidity : | 46~47%  |
| Test Channel : | 06      | Test Engineer :     | Zhi Lu  |

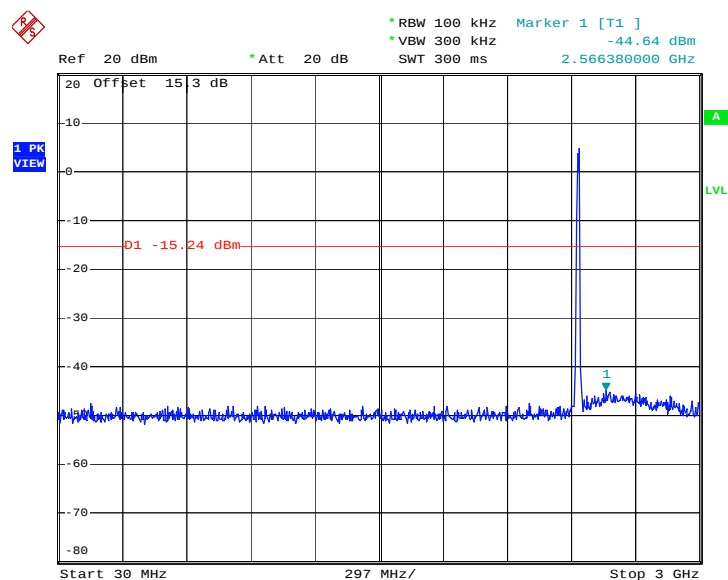**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**


Date: 2.DEC.2011 17:16:44

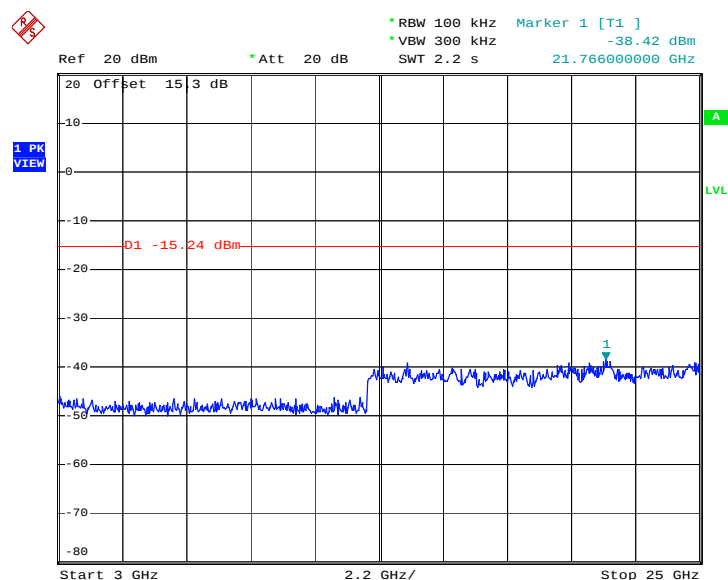
**Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz**


Date: 2.DEC.2011 17:17:01




|                |         |                     |        |
|----------------|---------|---------------------|--------|
| Test Mode :    | Mode 3  | Temperature :       | 24~25℃ |
| Test Band :    | 802.11b | Relative Humidity : | 46~47% |
| Test Channel : | 11      | Test Engineer :     | Zhi Lu |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

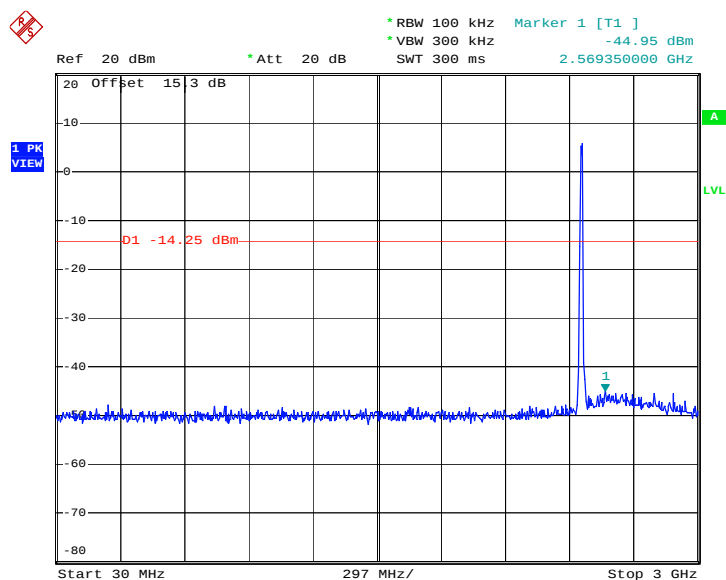

Date: 2.DEC.2011 17:33:02

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

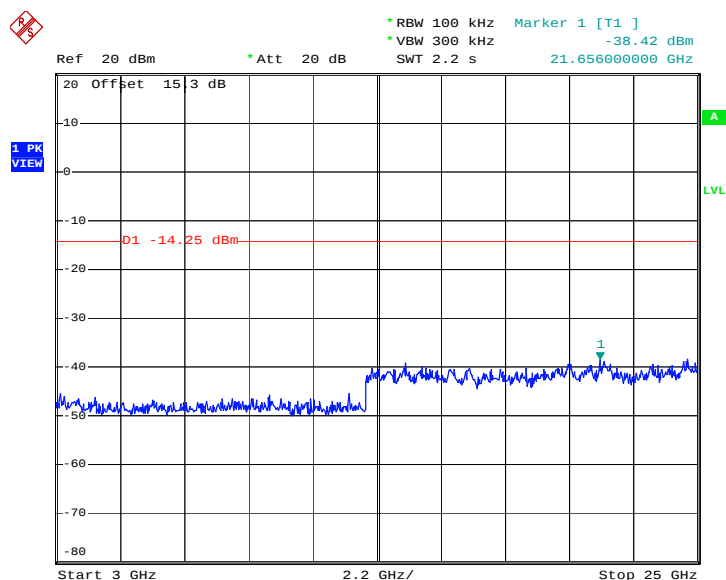


Date: 2.DEC.2011 17:33:18




|                |         |                     |         |
|----------------|---------|---------------------|---------|
| Test Mode :    | Mode 4  | Temperature :       | 24~25°C |
| Test Band :    | 802.11g | Relative Humidity : | 46~47%  |
| Test Channel : | 01      | Test Engineer :     | Zhi Lu  |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

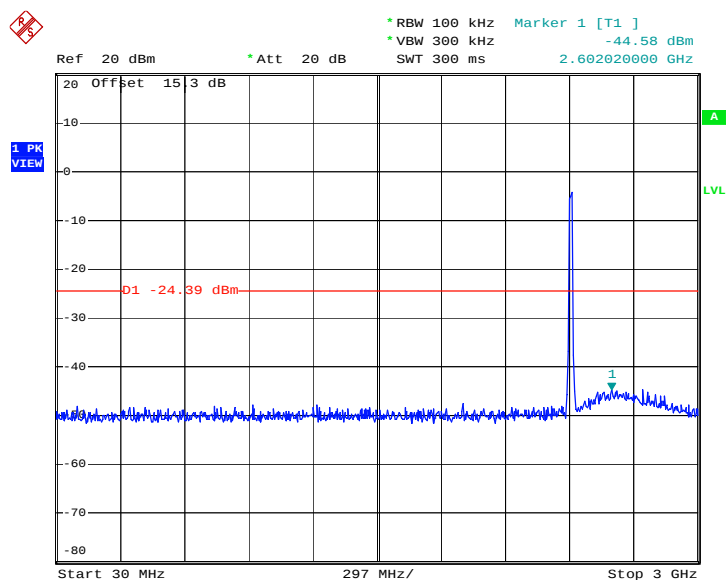

Date: 2.DEC.2011 18:06:59

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

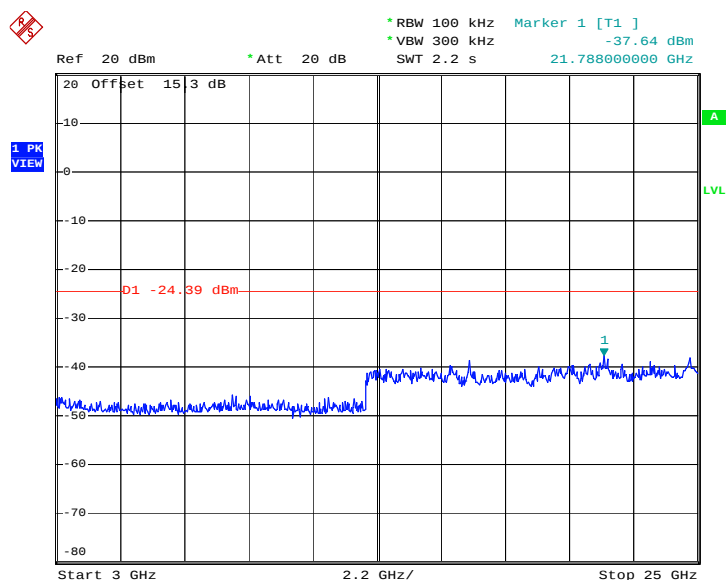


Date: 2.DEC.2011 18:07:16




|                |         |                     |        |
|----------------|---------|---------------------|--------|
| Test Mode :    | Mode 5  | Temperature :       | 24~25  |
| Test Band :    | 802.11g | Relative Humidity : | 46~47  |
| Test Channel : | 06      | Test Engineer :     | Zhi Lu |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

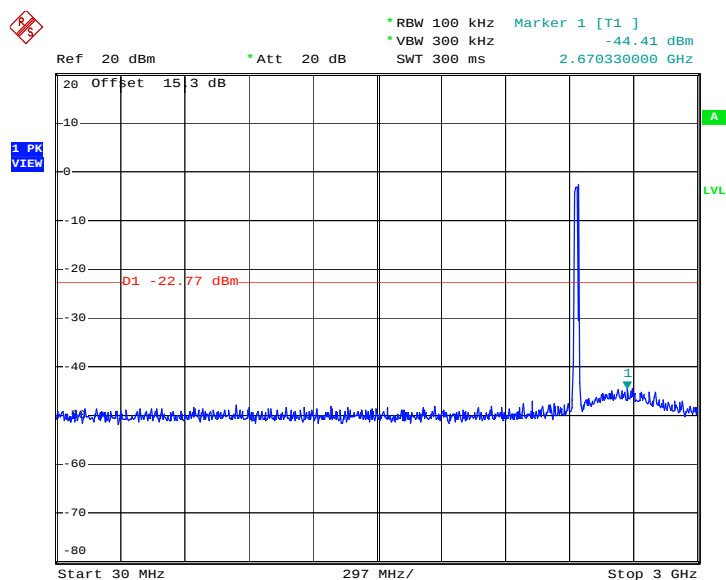

Date: 2.DEC.2011 18:29:54

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

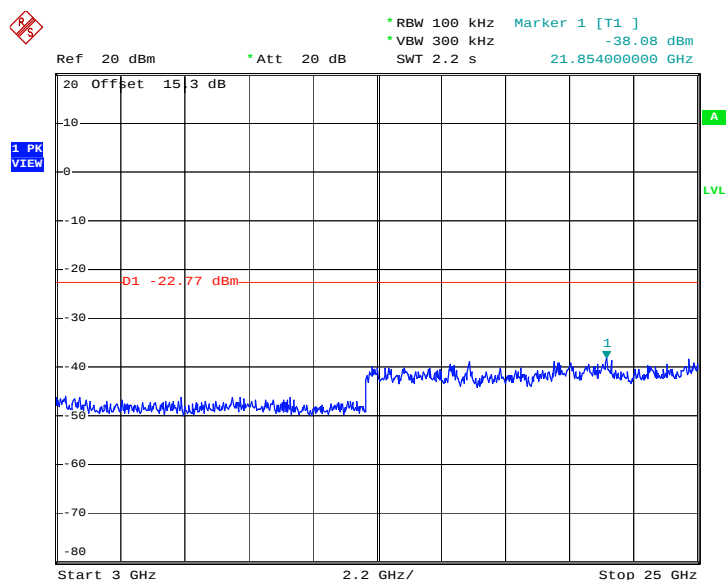


Date: 2.DEC.2011 18:30:11




|                |         |                     |         |
|----------------|---------|---------------------|---------|
| Test Mode :    | Mode 6  | Temperature :       | 24~25°C |
| Test Band :    | 802.11g | Relative Humidity : | 46~47%  |
| Test Channel : | 11      | Test Engineer :     | Zhi Lu  |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

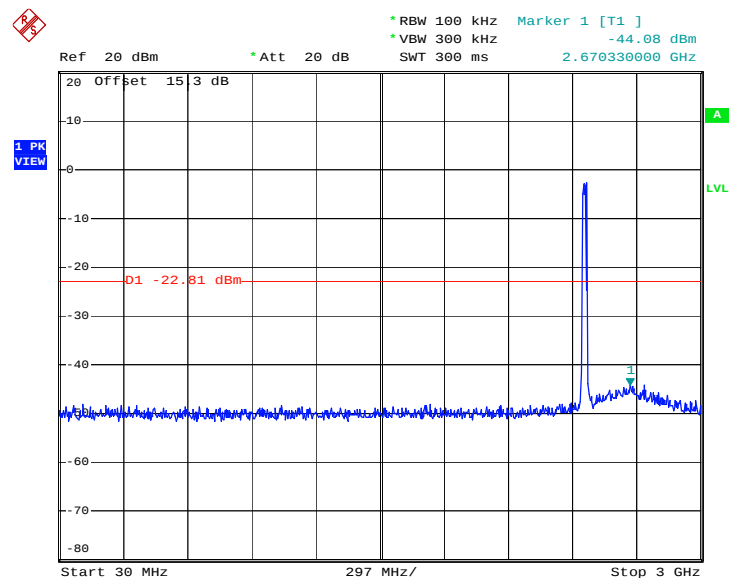

Date: 2.DEC.2011 18:46:23

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

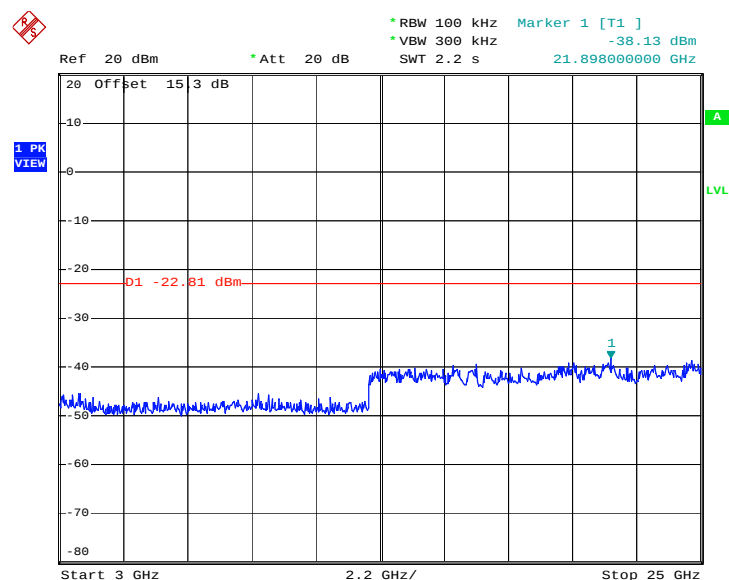

Date: 2.DEC.2011 18:46:40

### 3.5 Power Spectral Density Measurement

#### 3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

#### 3.5.4 Test Setup

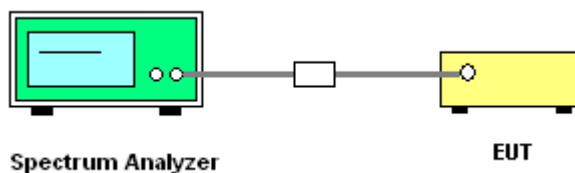


### 3.5.5 Test Result of Power Spectral Density

|                 |              |                     |        |
|-----------------|--------------|---------------------|--------|
| Test Mode :     | Mode 1, 2, 3 | Temperature :       | 24~25℃ |
| Test Engineer : | Zhi Lu       | Relative Humidity : | 46~47% |

| Channel | Frequency (MHz) | 802.11b Measured PSD (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------|-----------|
| 01      | 2412            | -16.16                     | 8                 | Pass      |
| 06      | 2437            | -13.37                     | 8                 | Pass      |
| 11      | 2462            | -12.09                     | 8                 | Pass      |


**Mode 1 : PSD Plot on 802.11b Channel 01**

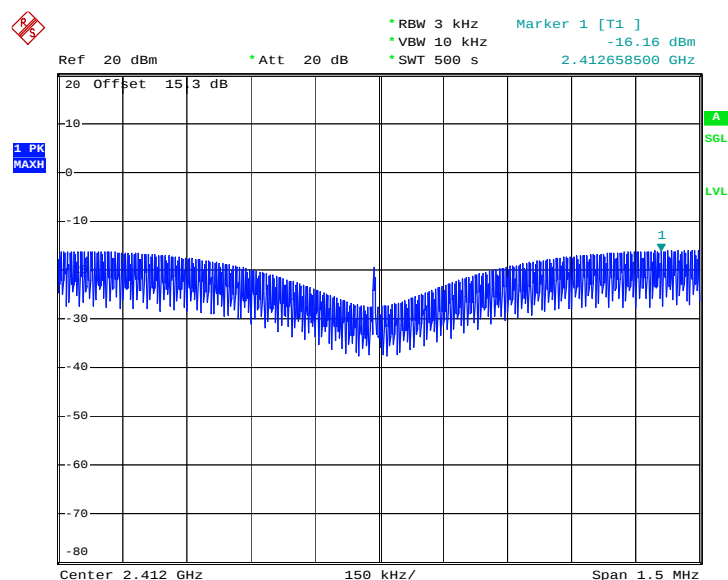

Date: 2.DEC.2011 17:11:29




Mode 2 : PSD Plot on 802.11b Channel 06

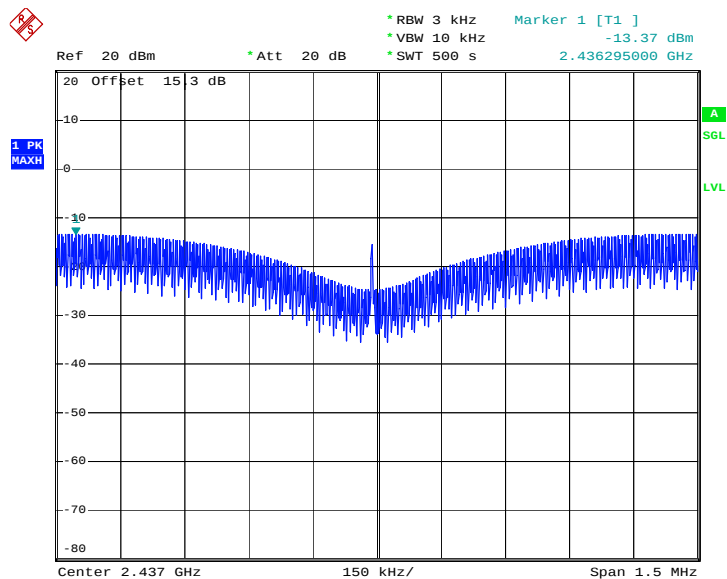

Date: 2.DEC.2011 17:26:40


Mode 3 : PSD Plot on 802.11b Channel 11

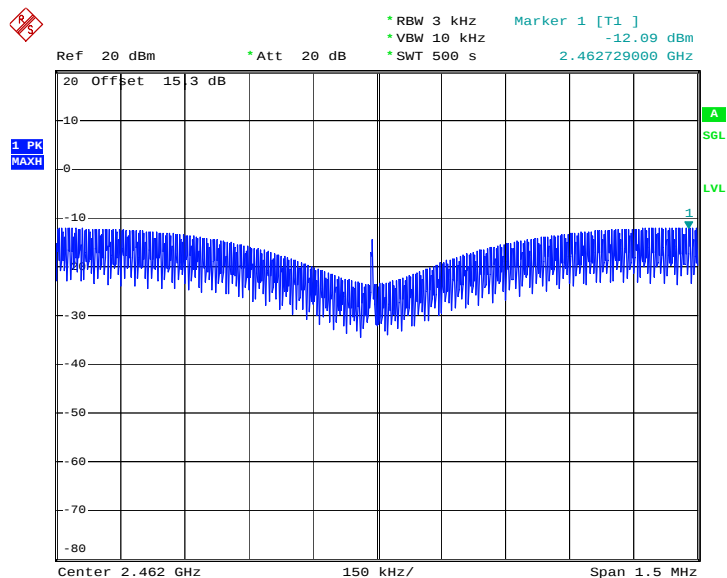

Date: 2.DEC.2011 17:58:03


|                        |              |                            |        |
|------------------------|--------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 4, 5, 6 | <b>Temperature :</b>       | 24~25℃ |
| <b>Test Engineer :</b> | Zhi Lu       | <b>Relative Humidity :</b> | 46~47% |

| Channel | Frequency (MHz) | 802.11g Measured PSD (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------|-----------|
| 01      | 2412            | -15.56                     | 8                 | Pass      |
| 06      | 2437            | -12.48                     | 8                 | Pass      |
| 11      | 2462            | -13.61                     | 8                 | Pass      |

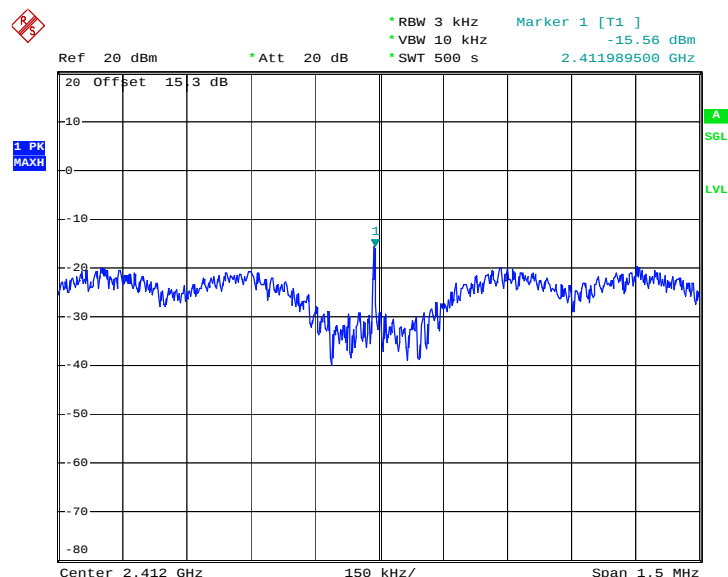**Mode 4 : PSD Plot on 802.11g Channel 01**


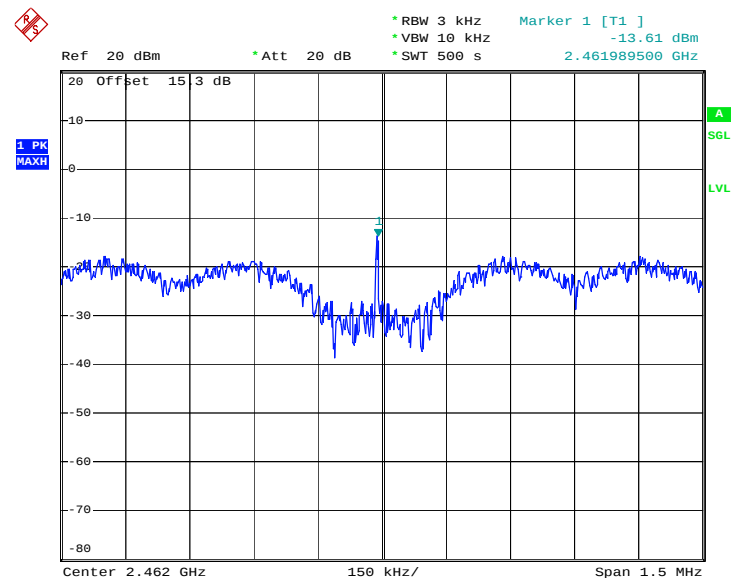
Date: 2.DEC.2011 18:23:55

## Mode 5 : PSD Plot on 802.11g Channel 06

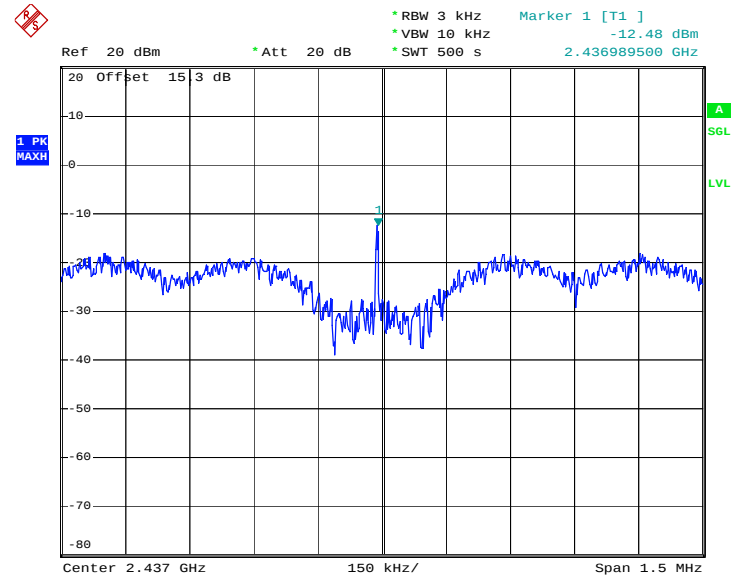

Date: 2.DEC.2011 18:39:16

## Mode 6 : PSD Plot on 802.11g Channel 11



Date: 2.DEC.2011 18:57:17

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission<br>(MHz) | Conducted Limit (dBuV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-Peak             | Average   |
| 0.15-0.5                       | 66 to 56*              | 56 to 46* |
| 0.5-5                          | 56                     | 46        |
| 5-30                           | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

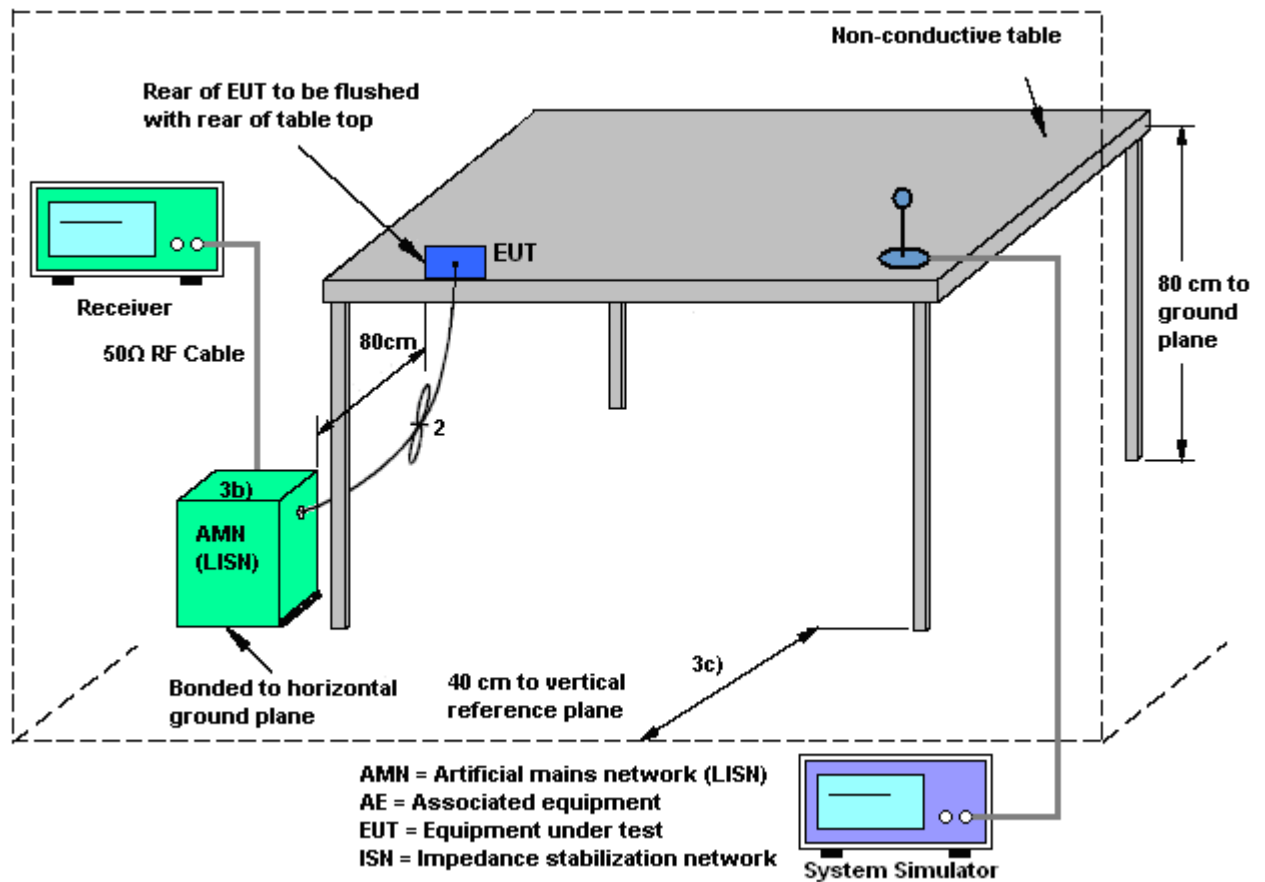

### 3.6.5 Test Result of AC Conducted Emission

|                 |                                                                                 |                     |         |
|-----------------|---------------------------------------------------------------------------------|---------------------|---------|
| Test Mode :     | Mode 1                                                                          | Temperature :       | 20~21°C |
| Test Engineer : | Jack Li                                                                         | Relative Humidity : | 42~43%  |
| Test Voltage :  | 120Vac / 60Hz                                                                   | Phase :             | Line    |
| Function Type : | WLAN Link + Adapter 4 + TC                                                      |                     |         |
| Remark :        | All emissions not reported here are more than 10 dB below the prescribed limit. |                     |         |

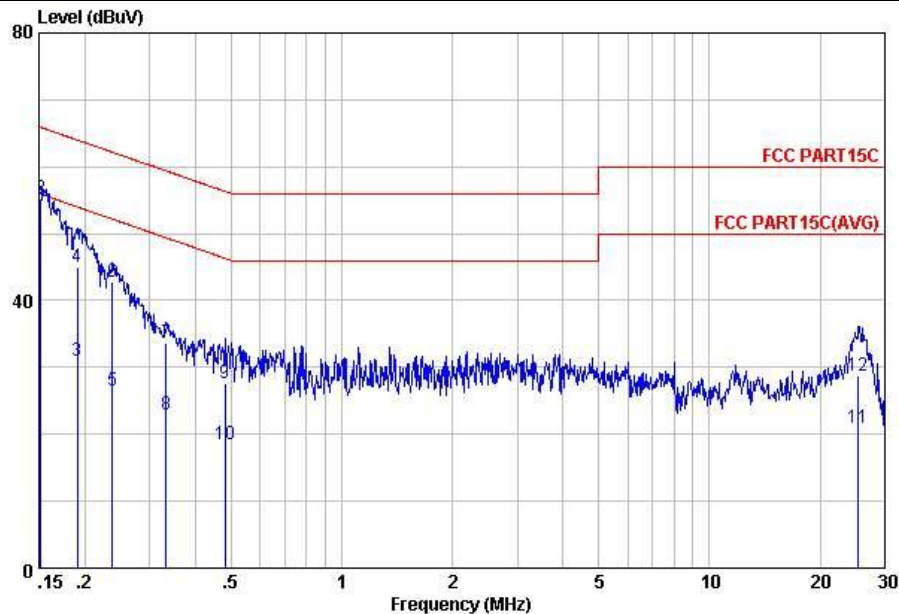


Site : C001-KS  
 Condition: FCC PART15C LISN-100807 LINE  
 Project : (FR) 172910  
 mode : Mode 1

|    | Freq  | Level | Over   | Limit | Read  | LISN   | Cable |         |
|----|-------|-------|--------|-------|-------|--------|-------|---------|
|    | MHz   | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  |
|    |       |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1  | 0.15  | 45.97 | -9.94  | 55.91 | 35.90 | -0.07  | 10.14 | Average |
| 2  | 0.15  | 55.27 | -10.64 | 65.91 | 45.20 | -0.07  | 10.14 | QP      |
| 3  | 0.19  | 30.98 | -23.04 | 54.02 | 20.90 | -0.07  | 10.15 | Average |
| 4  | 0.19  | 45.08 | -18.94 | 64.02 | 35.00 | -0.07  | 10.15 | QP      |
| 5  | 0.24  | 26.59 | -25.58 | 52.17 | 16.50 | -0.07  | 10.16 | Average |
| 6  | 0.24  | 42.69 | -19.48 | 62.17 | 32.60 | -0.07  | 10.16 | QP      |
| 7  | 0.33  | 33.60 | -25.80 | 59.40 | 23.50 | -0.08  | 10.18 | QP      |
| 8  | 0.33  | 23.00 | -26.40 | 49.40 | 12.90 | -0.08  | 10.18 | Average |
| 9  | 0.48  | 27.73 | -28.59 | 56.32 | 17.60 | -0.08  | 10.21 | QP      |
| 10 | 0.48  | 18.53 | -27.79 | 46.32 | 8.40  | -0.08  | 10.21 | Average |
| 11 | 25.46 | 20.95 | -29.05 | 50.00 | 10.09 | 0.20   | 10.66 | Average |
| 12 | 25.46 | 28.75 | -31.25 | 60.00 | 17.89 | 0.20   | 10.66 | QP      |

|                        |                                                                                 |                            |         |
|------------------------|---------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                          | <b>Temperature :</b>       | 20~21°C |
| <b>Test Engineer :</b> | Jack Li                                                                         | <b>Relative Humidity :</b> | 42~43%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                   | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | WLAN Link + Adapter 4 + TC                                                      |                            |         |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit. |                            |         |

Data: 2

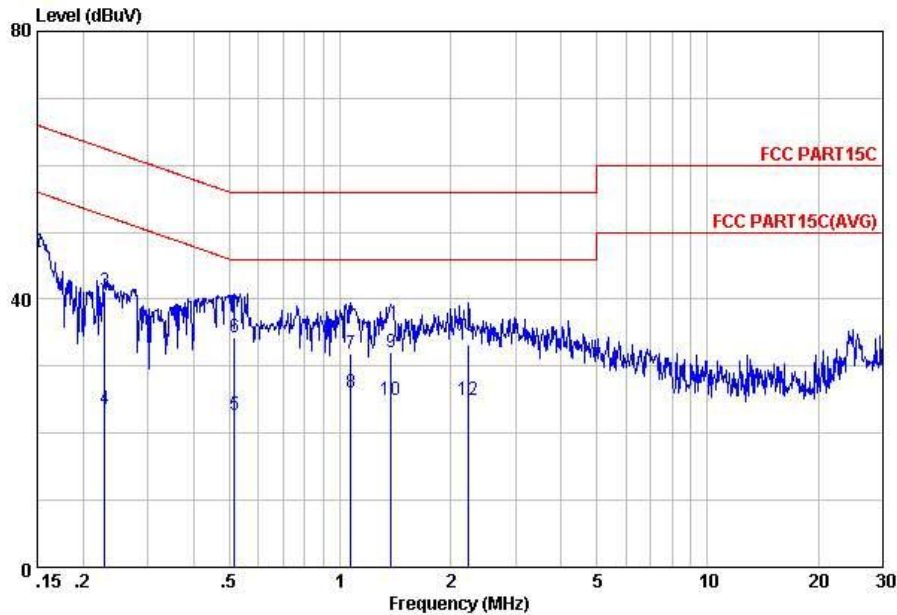

Site : C001-KS  
Condition: FCC PART15C LISN-100807 NEUTRAL  
Project : (FR) 172910  
mode : Mode 1

|    | Freq | Level | Over   | Limit | Read  | LISN   | Cable |         |
|----|------|-------|--------|-------|-------|--------|-------|---------|
|    | MHz  | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  |
|    |      |       |        |       |       |        |       |         |
| 1  | 0.15 | 26.73 | -39.27 | 66.00 | 16.68 | -0.09  | 10.14 | Average |
| 2  | 0.15 | 46.98 | -19.02 | 66.00 | 36.93 | -0.09  | 10.14 | QP      |
| 3  | 0.23 | 41.27 | -21.21 | 62.48 | 31.18 | -0.07  | 10.16 | QP      |
| 4  | 0.23 | 23.65 | -38.83 | 62.48 | 13.56 | -0.07  | 10.16 | Average |
| 5  | 0.52 | 22.69 | -33.31 | 56.00 | 12.56 | -0.08  | 10.21 | Average |
| 6  | 0.52 | 34.23 | -21.77 | 56.00 | 24.10 | -0.08  | 10.21 | QP      |
| 7  | 1.07 | 31.78 | -24.22 | 56.00 | 21.60 | -0.09  | 10.27 | QP      |
| 8  | 1.07 | 25.98 | -30.02 | 56.00 | 15.80 | -0.09  | 10.27 | Average |
| 9  | 1.37 | 31.98 | -24.02 | 56.00 | 21.79 | -0.10  | 10.29 | QP      |
| 10 | 1.37 | 25.01 | -30.99 | 56.00 | 14.82 | -0.10  | 10.29 | Average |
| 11 | 2.24 | 33.26 | -22.74 | 56.00 | 23.03 | -0.11  | 10.34 | QP      |
| 12 | 2.24 | 24.93 | -31.07 | 56.00 | 14.70 | -0.11  | 10.34 | Average |

### 3.7 Radiated Emission Measurement

#### 3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

#### 3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.7.3 Test Procedures


- The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
- Use the following spectrum analyzer settings:
  - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.7.4 Test Setup


For radiated emissions below 30MHz

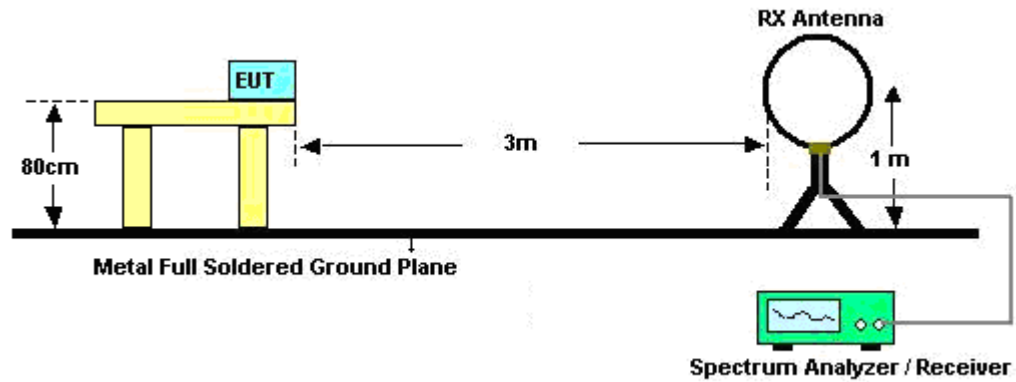

For radiated emissions from 30MHz to 1GHz

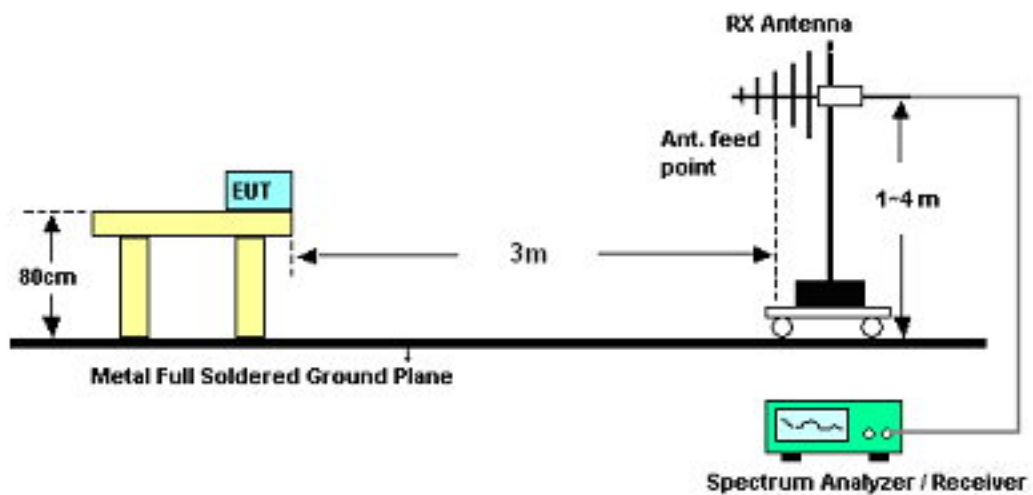

For radiated emissions above 1GHz

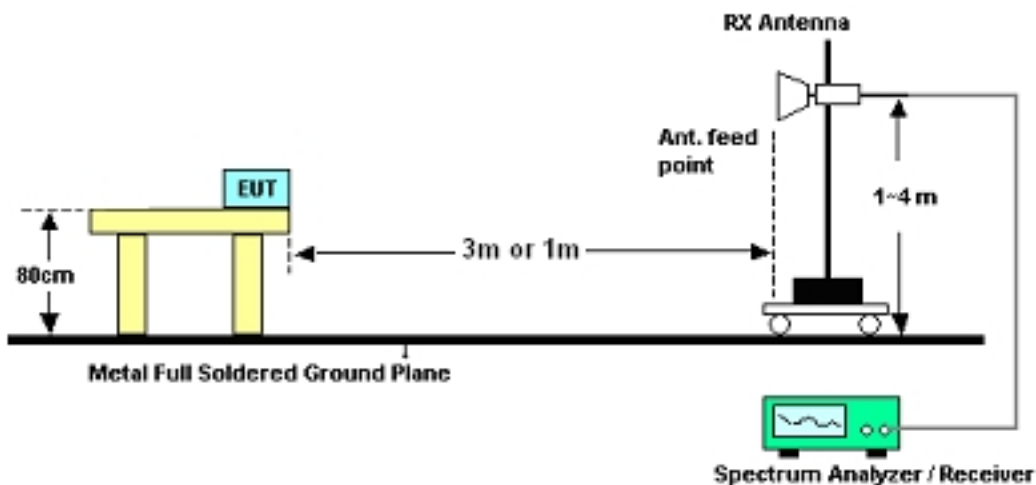

### 3.7.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

|                 |         |                     |        |  |
|-----------------|---------|---------------------|--------|--|
| Test Engineer : | Jack Li | Temperature :       | 20~21℃ |  |
|                 |         | Relative Humidity : | 41~42% |  |

| Frequency (MHz) | Level (dBuV) | Over Limit (dB) | Limit Line (dBuV) | Remark   |
|-----------------|--------------|-----------------|-------------------|----------|
| -               | -            | -               | -                 | See Note |

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

**3.7.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)**

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 1                                                | <b>Temperature :</b>       | 20~21℃     |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 41~42%     |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 135.3                | 33.16               | -10.34                  | 43.5                        | 51.46                   | 11.21                       | 0.48                    | 29.99                      | -                    | -                       | Peak    |
| 238.44               | 33.33               | -12.67                  | 46                          | 51.04                   | 11.46                       | 0.66                    | 29.83                      | -                    | -                       | Peak    |
| 297.57               | 36.21               | -9.79                   | 46                          | 52.47                   | 12.97                       | 0.72                    | 29.95                      | -                    | -                       | Peak    |
| 519.8                | 37.9                | -8.1                    | 46                          | 48.97                   | 17.67                       | 0.97                    | 29.71                      | 100                  | 342                     | Peak    |
| 598.2                | 37.5                | -8.5                    | 46                          | 47.45                   | 18.6                        | 1.07                    | 29.62                      | -                    | -                       | Peak    |
| 659.1                | 35.71               | -10.29                  | 46                          | 45.31                   | 18.96                       | 1.1                     | 29.66                      | -                    | -                       | Peak    |
| 2386.38              | 54.94               | -19.06                  | 74                          | 52.66                   | 32.86                       | 3.47                    | 34.05                      | 127                  | 57                      | Peak    |
| 2386.38              | 43.52               | -10.48                  | 54                          | 41.24                   | 32.86                       | 3.47                    | 34.05                      | 127                  | 57                      | Average |
| 2412                 | 103.12              | -                       | -                           | 100.79                  | 32.89                       | 3.52                    | 34.08                      | 180                  | 54                      | Average |
| 2412                 | 107.42              | -                       | -                           | 105.09                  | 32.89                       | 3.52                    | 34.08                      | 180                  | 54                      | Peak    |
| 2483.5               | 56.46               | -17.54                  | 74                          | 53.97                   | 33.01                       | 3.68                    | 34.2                       | 200                  | 55                      | Peak    |
| 2483.5               | 43.14               | -10.86                  | 54                          | 40.65                   | 33.01                       | 3.68                    | 34.2                       | 200                  | 55                      | Average |
| 4826                 | 52.02               | -21.98                  | 74                          | 44.15                   | 35.17                       | 4.97                    | 32.27                      | 100                  | 0                       | Peak    |
| 4826                 | 46.14               | -7.86                   | 54                          | 38.27                   | 35.17                       | 4.97                    | 32.27                      | 100                  | 0                       | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 1                                                | <b>Temperature :</b>       | 20~21℃   |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 41~42%   |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 55.38                | 32.16               | -7.84                   | 40                          | 55.8                    | 6.2                         | 0.29                    | 30.13                      | 102                  | 360                     | QP      |
| 95.34                | 28.51               | -14.99                  | 43.5                        | 48.28                   | 9.8                         | 0.4                     | 29.97                      | -                    | -                       | Peak    |
| 233.31               | 39.25               | -6.75                   | 46                          | 57.29                   | 11.17                       | 0.65                    | 29.86                      | -                    | -                       | Peak    |
| 519.8                | 35.47               | -10.53                  | 46                          | 46.54                   | 17.67                       | 0.97                    | 29.71                      | -                    | -                       | Peak    |
| 659.1                | 34.71               | -11.29                  | 46                          | 44.31                   | 18.96                       | 1.1                     | 29.66                      | -                    | -                       | Peak    |
| 797.7                | 34.64               | -11.36                  | 46                          | 43.13                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2386.76              | 56.28               | -17.72                  | 74                          | 54                      | 32.86                       | 3.47                    | 34.05                      | 160                  | 360                     | Peak    |
| 2386.76              | 44.48               | -9.52                   | 54                          | 42.2                    | 32.86                       | 3.47                    | 34.05                      | 160                  | 360                     | Average |
| 2412                 | 105.54              | -                       | -                           | 103.21                  | 32.89                       | 3.52                    | 34.08                      | 153                  | 0                       | Average |
| 2412                 | 109.83              | -                       | -                           | 107.5                   | 32.89                       | 3.52                    | 34.08                      | 153                  | 0                       | Peak    |
| 2483.5               | 57.79               | -16.21                  | 74                          | 55.3                    | 33.01                       | 3.68                    | 34.2                       | 176                  | 360                     | Peak    |
| 2483.5               | 46.59               | -7.41                   | 54                          | 44.1                    | 33.01                       | 3.68                    | 34.2                       | 176                  | 360                     | Average |
| 4826                 | 57.97               | -16.03                  | 74                          | 50.1                    | 35.17                       | 4.97                    | 32.27                      | 134                  | 30                      | Peak    |
| 4826                 | 50.6                | -3.4                    | 54                          | 42.73                   | 35.17                       | 4.97                    | 32.27                      | 134                  | 30                      | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 2                                                | <b>Temperature :</b>       | 20~21℃     |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 41~42%     |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 136.38               | 31.62               | -11.88                  | 43.5                        | 50.01                   | 11.13                       | 0.48                    | 30                         | -                    | -                       | Peak    |
| 232.23               | 34.02               | -11.98                  | 46                          | 52.22                   | 11.04                       | 0.64                    | 29.88                      | -                    | -                       | Peak    |
| 297.3                | 35.11               | -10.89                  | 46                          | 51.37                   | 12.97                       | 0.72                    | 29.95                      | -                    | -                       | Peak    |
| 516.3                | 37.57               | -8.43                   | 46                          | 48.77                   | 17.55                       | 0.97                    | 29.72                      | 194                  | 0                       | Peak    |
| 657.7                | 36.16               | -9.84                   | 46                          | 45.78                   | 18.95                       | 1.09                    | 29.66                      | -                    | -                       | Peak    |
| 728.4                | 33.65               | -12.35                  | 46                          | 42.43                   | 19.67                       | 1.16                    | 29.61                      | -                    | -                       | Peak    |
| 2390                 | 51.03               | -22.97                  | 74                          | 48.75                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Peak    |
| 2390                 | 42.15               | -11.85                  | 54                          | 39.87                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Average |
| 2437                 | 101.91              | -                       | -                           | 99.51                   | 32.95                       | 3.6                     | 34.15                      | 177                  | 47                      | Average |
| 2437                 | 109.13              | -                       | -                           | 106.73                  | 32.95                       | 3.6                     | 34.15                      | 177                  | 47                      | Peak    |
| 2483.5               | 55.65               | -18.35                  | 74                          | 53.16                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 52                      | Peak    |
| 2483.5               | 46.33               | -7.67                   | 54                          | 43.84                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 52                      | Average |
| 4876                 | 52.56               | -21.44                  | 74                          | 44.67                   | 35.18                       | 4.98                    | 32.27                      | 100                  | 0                       | Peak    |
| 4876                 | 46.65               | -7.35                   | 54                          | 38.76                   | 35.18                       | 4.98                    | 32.27                      | 100                  | 0                       | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 2                                                | <b>Temperature :</b>       | 20~21℃   |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 41~42%   |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 55.65                | 33.18               | -6.82                   | 40                          | 56.82                   | 6.2                         | 0.29                    | 30.13                      | 200                  | 0                       | Peak    |
| 235.74               | 38.88               | -7.12                   | 46                          | 56.79                   | 11.29                       | 0.65                    | 29.85                      | -                    | -                       | Peak    |
| 291.9                | 34.75               | -11.25                  | 46                          | 51.1                    | 12.89                       | 0.71                    | 29.95                      | -                    | -                       | Peak    |
| 332.9                | 36.69               | -9.31                   | 46                          | 51.79                   | 14.05                       | 0.79                    | 29.94                      | -                    | -                       | Peak    |
| 728.4                | 36.46               | -9.54                   | 46                          | 45.24                   | 19.67                       | 1.16                    | 29.61                      | -                    | -                       | Peak    |
| 797.7                | 38.45               | -7.55                   | 46                          | 46.94                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2390                 | 53.04               | -20.96                  | 74                          | 50.76                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Peak    |
| 2390                 | 41.88               | -12.12                  | 54                          | 39.6                    | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Average |
| 2437                 | 105.6               | -                       | -                           | 103.2                   | 32.95                       | 3.6                     | 34.15                      | 100                  | 357                     | Average |
| 2437                 | 109.91              | -                       | -                           | 107.51                  | 32.95                       | 3.6                     | 34.15                      | 100                  | 357                     | Peak    |
| 2483.5               | 56.47               | -17.53                  | 74                          | 53.98                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 0                       | Peak    |
| 2483.5               | 46.3                | -7.7                    | 54                          | 43.81                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 0                       | Average |
| 4874                 | 56.91               | -17.09                  | 74                          | 49.02                   | 35.18                       | 4.98                    | 32.27                      | 182                  | 305                     | Peak    |
| 4874                 | 48.25               | -5.75                   | 54                          | 40.36                   | 35.18                       | 4.98                    | 32.27                      | 182                  | 305                     | Average |
| 7314                 | 49.56               | -24.44                  | 74                          | 41.81                   | 36.2                        | 6.6                     | 35.05                      | 100                  | 0                       | Peak    |
| 7314                 | 44.31               | -9.69                   | 54                          | 36.56                   | 36.2                        | 6.6                     | 35.05                      | 100                  | 0                       | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 3                                                | <b>Temperature :</b>       | 20~21℃     |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 41~42%     |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 133.95               | 33.44               | -10.06                  | 43.5                        | 51.56                   | 11.39                       | 0.48                    | 29.99                      | -                    | -                       | Peak    |
| 240.33               | 35.7                | -10.3                   | 46                          | 53.3                    | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 298.65               | 36.98               | -9.02                   | 46                          | 53.22                   | 12.99                       | 0.72                    | 29.95                      | 164                  | 328                     | Peak    |
| 518.4                | 34.14               | -11.86                  | 46                          | 45.24                   | 17.64                       | 0.97                    | 29.71                      | -                    | -                       | Peak    |
| 650                  | 35.4                | -10.6                   | 46                          | 45.06                   | 18.9                        | 1.09                    | 29.65                      | -                    | -                       | Peak    |
| 660.5                | 35.26               | -10.74                  | 46                          | 44.85                   | 18.97                       | 1.1                     | 29.66                      | -                    | -                       | Peak    |
| 2390                 | 52.94               | -21.06                  | 74                          | 50.66                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Peak    |
| 2390                 | 42.26               | -11.74                  | 54                          | 39.98                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Average |
| 2462                 | 103.61              | -                       | -                           | 101.16                  | 32.98                       | 3.64                    | 34.17                      | 123                  | 52                      | Average |
| 2462                 | 107.77              | -                       | -                           | 105.32                  | 32.98                       | 3.64                    | 34.17                      | 123                  | 52                      | Peak    |
| 2487.84              | 57.93               | -16.07                  | 74                          | 55.39                   | 33.05                       | 3.72                    | 34.23                      | 116                  | 0                       | Peak    |
| 2487.84              | 43.68               | -10.32                  | 54                          | 41.14                   | 33.05                       | 3.72                    | 34.23                      | 116                  | 0                       | Average |
| 4924                 | 55.18               | -18.82                  | 74                          | 47.26                   | 35.19                       | 4.99                    | 32.26                      | 100                  | 107                     | Peak    |
| 4924                 | 45.54               | -8.46                   | 54                          | 37.62                   | 35.19                       | 4.99                    | 32.26                      | 100                  | 107                     | Average |
| 7386                 | 52.63               | -21.37                  | 74                          | 44.95                   | 36.24                       | 6.66                    | 35.22                      | 100                  | 249                     | Peak    |
| 7386                 | 44.65               | -9.35                   | 54                          | 36.97                   | 36.24                       | 6.66                    | 35.22                      | 100                  | 249                     | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 3                                                | <b>Temperature :</b>       | 20~21℃   |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 41~42%   |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 49.98                | 35.84               | -4.16                   | 40                          | 58.29                   | 7.4                         | 0.28                    | 30.13                      | 100                  | 360                     | Peak    |
| 55.65                | 34.53               | -5.47                   | 40                          | 58.17                   | 6.2                         | 0.29                    | 30.13                      | -                    | -                       | Peak    |
| 226.29               | 34.54               | -11.46                  | 46                          | 53.26                   | 10.59                       | 0.63                    | 29.94                      | -                    | -                       | Peak    |
| 337.8                | 36.94               | -9.06                   | 46                          | 51.88                   | 14.2                        | 0.8                     | 29.94                      | -                    | -                       | Peak    |
| 659.1                | 35.01               | -10.99                  | 46                          | 44.61                   | 18.96                       | 1.1                     | 29.66                      | -                    | -                       | Peak    |
| 797.7                | 37.9                | -8.1                    | 46                          | 46.39                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2390                 | 53.16               | -20.84                  | 74                          | 50.88                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 70                      | Peak    |
| 2390                 | 42.87               | -11.13                  | 54                          | 40.59                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 70                      | Average |
| 2462                 | 109.3               | -                       | -                           | 106.85                  | 32.98                       | 3.64                    | 34.17                      | 100                  | 360                     | Peak    |
| 2462                 | 104.23              | -                       | -                           | 101.78                  | 32.98                       | 3.64                    | 34.17                      | 100                  | 360                     | Average |
| 2484.61              | 47.89               | -6.11                   | 54                          | 45.4                    | 33.01                       | 3.68                    | 34.2                       | 100                  | 354                     | Average |
| 2484.61              | 58.08               | -15.92                  | 74                          | 55.59                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 354                     | Peak    |
| 4924                 | 60.2                | -13.8                   | 74                          | 52.28                   | 35.19                       | 4.99                    | 32.26                      | 100                  | 49                      | Peak    |
| 4924                 | 50.84               | -3.16                   | 54                          | 42.92                   | 35.19                       | 4.99                    | 32.26                      | 100                  | 49                      | Average |
| 7388                 | 50.94               | -23.06                  | 74                          | 43.26                   | 36.24                       | 6.66                    | 35.22                      | 100                  | 0                       | Peak    |
| 7388                 | 46.57               | -7.43                   | 54                          | 38.89                   | 36.24                       | 6.66                    | 35.22                      | 100                  | 0                       | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 4                                                | <b>Temperature :</b>       | 20~21℃     |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 41~42%     |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 135.03               | 36.63               | -6.87                   | 43.5                        | 54.84                   | 11.3                        | 0.48                    | 29.99                      | 102                  | 122                     | Peak    |
| 146.64               | 34.9                | -8.6                    | 43.5                        | 54.09                   | 10.29                       | 0.5                     | 29.98                      | -                    | -                       | Peak    |
| 242.22               | 37.51               | -8.49                   | 46                          | 55.02                   | 11.66                       | 0.66                    | 29.83                      | -                    | -                       | Peak    |
| 377                  | 36.21               | -9.79                   | 46                          | 49.92                   | 15.34                       | 0.83                    | 29.88                      | -                    | -                       | Peak    |
| 520.5                | 32.34               | -13.66                  | 46                          | 43.37                   | 17.7                        | 0.98                    | 29.71                      | -                    | -                       | Peak    |
| 962.2                | 32.48               | -21.52                  | 54                          | 39.87                   | 20.8                        | 1.35                    | 29.54                      | -                    | -                       | Peak    |
| 2389.23              | 52.12               | -21.88                  | 74                          | 49.84                   | 32.86                       | 3.47                    | 34.05                      | 112                  | 132                     | Peak    |
| 2389.23              | 39.96               | -14.04                  | 54                          | 37.68                   | 32.86                       | 3.47                    | 34.05                      | 112                  | 132                     | Average |
| 2437                 | 102.84              | -                       | -                           | 100.44                  | 32.95                       | 3.6                     | 34.15                      | 121                  | 45                      | Peak    |
| 2437                 | 101.84              | -                       | -                           | 99.44                   | 32.95                       | 3.6                     | 34.15                      | 121                  | 45                      | Average |
| 2485.94              | 53.21               | -20.79                  | 74                          | 50.72                   | 33.01                       | 3.68                    | 34.2                       | 101                  | 339                     | Peak    |
| 2485.94              | 41.48               | -12.52                  | 54                          | 38.99                   | 33.01                       | 3.68                    | 34.2                       | 101                  | 339                     | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 4                                                | <b>Temperature :</b>       | 20~21℃   |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 41~42%   |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 56.19                | 34.34               | -5.66                   | 40                          | 58.2                    | 5.98                        | 0.3                     | 30.14                      | 100                  | 360                     | QP      |
| 147.72               | 31.24               | -12.26                  | 43.5                        | 50.51                   | 10.21                       | 0.5                     | 29.98                      | -                    | -                       | Peak    |
| 216.57               | 30.09               | -15.91                  | 46                          | 49.64                   | 9.83                        | 0.61                    | 29.99                      | -                    | -                       | Peak    |
| 519.8                | 33.19               | -12.81                  | 46                          | 44.26                   | 17.67                       | 0.97                    | 29.71                      | -                    | -                       | Peak    |
| 701.8                | 34.62               | -11.38                  | 46                          | 43.89                   | 19.32                       | 1.13                    | 29.72                      | -                    | -                       | Peak    |
| 797.7                | 38.58               | -7.42                   | 46                          | 47.07                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2388.28              | 56.13               | -17.87                  | 74                          | 53.85                   | 32.86                       | 3.47                    | 34.05                      | 106                  | 21                      | Peak    |
| 2388.28              | 41.95               | -12.05                  | 54                          | 39.67                   | 32.86                       | 3.47                    | 34.05                      | 106                  | 21                      | Average |
| 2437                 | 111.31              | -                       | -                           | 108.91                  | 32.95                       | 3.6                     | 34.15                      | 101                  | 16                      | Peak    |
| 2437                 | 106.39              | -                       | -                           | 103.99                  | 32.95                       | 3.6                     | 34.15                      | 101                  | 16                      | Average |
| 2485.75              | 59.26               | -14.74                  | 74                          | 56.77                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 15                      | Peak    |
| 2485.75              | 46.55               | -7.45                   | 54                          | 44.06                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 15                      | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 5                                                | <b>Temperature :</b>       | 20~21℃     |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 41~42%     |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 137.73               | 29.01               | -14.49                  | 43.5                        | 47.47                   | 11.05                       | 0.49                    | 30                         | -                    | -                       | Peak    |
| 237.63               | 35.71               | -10.29                  | 46                          | 53.49                   | 11.4                        | 0.65                    | 29.83                      | -                    | -                       | Peak    |
| 296.22               | 36.17               | -9.83                   | 46                          | 52.45                   | 12.95                       | 0.72                    | 29.95                      | 200                  | 301                     | Peak    |
| 516.3                | 34.7                | -11.3                   | 46                          | 45.9                    | 17.55                       | 0.97                    | 29.72                      | -                    | -                       | Peak    |
| 658.4                | 35.27               | -10.73                  | 46                          | 44.88                   | 18.95                       | 1.1                     | 29.66                      | -                    | -                       | Peak    |
| 797.7                | 34.07               | -11.93                  | 46                          | 42.56                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2390                 | 56.65               | -17.35                  | 74                          | 54.37                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 36                      | Peak    |
| 2390                 | 43.93               | -10.07                  | 54                          | 41.65                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 36                      | Average |
| 2412                 | 105.41              | -                       | -                           | 103.08                  | 32.89                       | 3.52                    | 34.08                      | 100                  | 52                      | Peak    |
| 2412                 | 95.68               | -                       | -                           | 93.35                   | 32.89                       | 3.52                    | 34.08                      | 100                  | 52                      | Average |
| 2495.25              | 58.28               | -15.72                  | 74                          | 55.74                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 166                     | Peak    |
| 2495.25              | 45.49               | -8.51                   | 54                          | 42.95                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 166                     | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 5                                                | <b>Temperature :</b>       | 20~21℃   |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 41~42%   |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 55.65                | 34.7                | -5.3                    | 40                          | 58.34                   | 6.2                         | 0.29                    | 30.13                      | 200                  | 355                     | Peak    |
| 234.66               | 39.99               | -6.01                   | 46                          | 57.97                   | 11.23                       | 0.65                    | 29.86                      | -                    | -                       | Peak    |
| 296.76               | 35.09               | -10.91                  | 46                          | 51.36                   | 12.96                       | 0.72                    | 29.95                      | -                    | -                       | Peak    |
| 309.8                | 36.5                | -9.5                    | 46                          | 52.5                    | 13.22                       | 0.73                    | 29.95                      | -                    | -                       | Peak    |
| 728.4                | 35.03               | -10.97                  | 46                          | 43.81                   | 19.67                       | 1.16                    | 29.61                      | -                    | -                       | Peak    |
| 797.7                | 37.28               | -8.72                   | 46                          | 45.77                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2390                 | 55.54               | -18.46                  | 74                          | 53.26                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 278                     | Peak    |
| 2390                 | 42.72               | -11.28                  | 54                          | 40.44                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 278                     | Average |
| 2412                 | 105.76              | -                       | -                           | 103.43                  | 32.89                       | 3.52                    | 34.08                      | 100                  | 348                     | Peak    |
| 2412                 | 96.05               | -                       | -                           | 93.72                   | 32.89                       | 3.52                    | 34.08                      | 100                  | 348                     | Average |
| 2499.43              | 57.38               | -16.62                  | 74                          | 54.84                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 221                     | Peak    |
| 2499.43              | 43.86               | -10.14                  | 54                          | 41.32                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 221                     | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 6                                                | <b>Temperature :</b>       | 20~21℃     |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 41~42%     |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 55.92                | 32.67               | -7.33                   | 40                          | 56.53                   | 5.98                        | 0.3                     | 30.14                      | -                    | -                       | Peak    |
| 136.11               | 40.34               | -3.16                   | 43.5                        | 58.64                   | 11.21                       | 0.48                    | 29.99                      | 176                  | 360                     | Peak    |
| 223.32               | 41.27               | -4.73                   | 46                          | 60.27                   | 10.33                       | 0.63                    | 29.96                      | -                    | -                       | Peak    |
| 514.2                | 34.1                | -11.9                   | 46                          | 45.35                   | 17.5                        | 0.97                    | 29.72                      | -                    | -                       | Peak    |
| 650                  | 33.99               | -12.01                  | 46                          | 43.65                   | 18.9                        | 1.09                    | 29.65                      | -                    | -                       | Peak    |
| 728.4                | 34.09               | -11.91                  | 46                          | 42.87                   | 19.67                       | 1.16                    | 29.61                      | -                    | -                       | Peak    |
| 2365.29              | 53.82               | -20.18                  | 74                          | 51.61                   | 32.81                       | 3.38                    | 33.98                      | 110                  | 360                     | Peak    |
| 2365.29              | 43.44               | -10.56                  | 54                          | 41.23                   | 32.81                       | 3.38                    | 33.98                      | 110                  | 360                     | Average |
| 2437                 | 106.88              | -                       | -                           | 104.48                  | 32.95                       | 3.6                     | 34.15                      | 102                  | 348                     | Peak    |
| 2437                 | 97.28               | -                       | -                           | 94.88                   | 32.95                       | 3.6                     | 34.15                      | 102                  | 348                     | Average |
| 2498.67              | 56.8                | -17.2                   | 74                          | 54.26                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 338                     | Peak    |
| 2498.67              | 44.62               | -9.38                   | 54                          | 42.08                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 338                     | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 6                                                | <b>Temperature :</b>       | 20~21℃   |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 41~42%   |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 55.11                | 31.76               | -8.24                   | 40                          | 55.4                    | 6.2                         | 0.29                    | 30.13                      | 100                  | 54                      | QP      |
| 215.22               | 40.83               | -2.67                   | 43.5                        | 60.44                   | 9.77                        | 0.61                    | 29.99                      | -                    | -                       | Peak    |
| 230.34               | 41.3                | -4.7                    | 46                          | 59.58                   | 10.97                       | 0.64                    | 29.89                      | -                    | -                       | Peak    |
| 526.1                | 33.03               | -12.97                  | 46                          | 43.86                   | 17.89                       | 0.98                    | 29.7                       | -                    | -                       | Peak    |
| 728.4                | 35.61               | -10.39                  | 46                          | 44.39                   | 19.67                       | 1.16                    | 29.61                      | -                    | -                       | Peak    |
| 797.7                | 36.81               | -9.19                   | 46                          | 45.3                    | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2375.93              | 53.04               | -20.96                  | 74                          | 50.8                    | 32.83                       | 3.42                    | 34.01                      | 116                  | 310                     | Peak    |
| 2375.93              | 42.55               | -11.45                  | 54                          | 40.31                   | 32.83                       | 3.42                    | 34.01                      | 116                  | 310                     | Average |
| 2437                 | 107.41              | -                       | -                           | 105.01                  | 32.95                       | 3.6                     | 34.15                      | 132                  | 286                     | Peak    |
| 2437                 | 95.96               | -                       | -                           | 93.56                   | 32.95                       | 3.6                     | 34.15                      | 132                  | 286                     | Average |
| 2492.21              | 57.2                | -16.8                   | 74                          | 54.66                   | 33.05                       | 3.72                    | 34.23                      | 147                  | 7                       | Peak    |
| 2492.21              | 44.12               | -9.88                   | 54                          | 41.58                   | 33.05                       | 3.72                    | 34.23                      | 147                  | 7                       | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 7                                                | <b>Temperature :</b>       | 20~21℃     |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 41~42%     |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 55.92                | 33.15               | -6.85                   | 40                          | 57.01                   | 5.98                        | 0.3                     | 30.14                      | -                    | -                       | Peak    |
| 135.57               | 39.78               | -3.72                   | 43.5                        | 58.08                   | 11.21                       | 0.48                    | 29.99                      | 163                  | 360                     | Peak    |
| 221.16               | 41.55               | -4.45                   | 46                          | 60.73                   | 10.17                       | 0.62                    | 29.97                      | -                    | -                       | Peak    |
| 519.8                | 33.79               | -12.21                  | 46                          | 44.86                   | 17.67                       | 0.97                    | 29.71                      | -                    | -                       | Peak    |
| 650                  | 35.13               | -10.87                  | 46                          | 44.79                   | 18.9                        | 1.09                    | 29.65                      | -                    | -                       | Peak    |
| 797.7                | 33.72               | -12.28                  | 46                          | 42.21                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2372.7               | 53.1                | -20.9                   | 74                          | 50.86                   | 32.83                       | 3.42                    | 34.01                      | 113                  | 105                     | Peak    |
| 2372.7               | 42.85               | -11.15                  | 54                          | 40.61                   | 32.83                       | 3.42                    | 34.01                      | 113                  | 105                     | Average |
| 2462                 | 108.08              | -                       | -                           | 105.63                  | 32.98                       | 3.64                    | 34.17                      | 101                  | 47                      | Peak    |
| 2462                 | 97.76               | -                       | -                           | 95.31                   | 32.98                       | 3.64                    | 34.17                      | 101                  | 47                      | Average |
| 2486.7               | 63.31               | -10.69                  | 74                          | 60.82                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 48                      | Peak    |
| 2486.7               | 47.35               | -6.65                   | 54                          | 44.86                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 48                      | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 7                                                | <b>Temperature :</b>       | 20~21℃   |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 41~42%   |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 35.94                | 35.82               | -4.18                   | 40                          | 51.02                   | 14.65                       | 0.23                    | 30.08                      | -                    | -                       | Peak    |
| 54.84                | 31.86               | -8.14                   | 40                          | 55.5                    | 6.2                         | 0.29                    | 30.13                      | 102                  | 32                      | QP      |
| 222.78               | 40.56               | -5.44                   | 46                          | 59.56                   | 10.33                       | 0.63                    | 29.96                      | -                    | -                       | Peak    |
| 339.2                | 37                  | -9                      | 46                          | 51.89                   | 14.25                       | 0.8                     | 29.94                      | -                    | -                       | Peak    |
| 728.4                | 36.25               | -9.75                   | 46                          | 45.03                   | 19.67                       | 1.16                    | 29.61                      | -                    | -                       | Peak    |
| 797.7                | 38.13               | -7.87                   | 46                          | 46.62                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2368.33              | 53.02               | -20.98                  | 74                          | 50.81                   | 32.81                       | 3.38                    | 33.98                      | 132                  | 345                     | Peak    |
| 2368.33              | 42.88               | -11.12                  | 54                          | 40.67                   | 32.81                       | 3.38                    | 33.98                      | 132                  | 345                     | Average |
| 2462                 | 107.04              | -                       | -                           | 104.59                  | 32.98                       | 3.64                    | 34.17                      | 100                  | 328                     | Peak    |
| 2462                 | 97.39               | -                       | -                           | 94.94                   | 32.98                       | 3.64                    | 34.17                      | 100                  | 328                     | Average |
| 2484.04              | 63.66               | -10.34                  | 74                          | 61.17                   | 33.01                       | 3.68                    | 34.2                       | 148                  | 6                       | Peak    |
| 2484.04              | 48.96               | -5.04                   | 54                          | 46.47                   | 33.01                       | 3.68                    | 34.2                       | 148                  | 6                       | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 8                                                | <b>Temperature :</b>       | 20~21℃     |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 41~42%     |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 56.19                | 25.09               | -14.91                  | 40                          | 48.95                   | 5.98                        | 0.3                     | 30.14                      | -                    | -                       | Peak    |
| 135.3                | 34.95               | -8.55                   | 43.5                        | 53.25                   | 11.21                       | 0.48                    | 29.99                      | 134                  | 360                     | Peak    |
| 242.76               | 36.98               | -9.02                   | 46                          | 54.49                   | 11.66                       | 0.66                    | 29.83                      | -                    | -                       | Peak    |
| 484.8                | 35.44               | -10.56                  | 46                          | 47.28                   | 16.97                       | 0.94                    | 29.75                      | -                    | -                       | Peak    |
| 519.8                | 36.04               | -9.96                   | 46                          | 47.11                   | 17.67                       | 0.97                    | 29.71                      | -                    | -                       | Peak    |
| 797.7                | 32.17               | -13.83                  | 46                          | 40.66                   | 19.85                       | 1.25                    | 29.59                      | -                    | -                       | Peak    |
| 2380.87              | 51.59               | -22.41                  | 74                          | 49.35                   | 32.83                       | 3.42                    | 34.01                      | 164                  | 360                     | Peak    |
| 2380.87              | 40.18               | -13.82                  | 54                          | 37.94                   | 32.83                       | 3.42                    | 34.01                      | 164                  | 360                     | Average |
| 2462                 | 102.29              | -                       | -                           | 99.84                   | 32.98                       | 3.64                    | 34.17                      | 101                  | 340                     | Peak    |
| 2462                 | 90.97               | -                       | -                           | 88.52                   | 32.98                       | 3.64                    | 34.17                      | 101                  | 340                     | Average |
| 2486.89              | 60.11               | -13.89                  | 74                          | 57.62                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 339                     | Peak    |
| 2486.89              | 43.2                | -10.8                   | 54                          | 40.71                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 339                     | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 8                                                | <b>Temperature :</b>       | 20~21℃   |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 41~42%   |
| <b>Test Engineer :</b> | Jack Li                                               | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 56.19                | 32.94               | -7.06                   | 40                          | 56.8                    | 5.98                        | 0.3                     | 30.14                      | 100                  | 298                     | QP      |
| 146.1                | 28.82               | -14.68                  | 43.5                        | 48.01                   | 10.29                       | 0.5                     | 29.98                      | -                    | -                       | Peak    |
| 246.54               | 31.03               | -14.97                  | 46                          | 48.35                   | 11.84                       | 0.67                    | 29.83                      | -                    | -                       | Peak    |
| 661.9                | 32.57               | -13.43                  | 46                          | 42.16                   | 18.97                       | 1.1                     | 29.66                      | -                    | -                       | Peak    |
| 728.4                | 33.33               | -12.67                  | 46                          | 42.11                   | 19.67                       | 1.16                    | 29.61                      | -                    | -                       | Peak    |
| 754.3                | 34.35               | -11.65                  | 46                          | 42.81                   | 19.9                        | 1.18                    | 29.54                      | -                    | -                       | Peak    |
| 2374.79              | 56.33               | -17.67                  | 74                          | 54.09                   | 32.83                       | 3.42                    | 34.01                      | 113                  | 311                     | Peak    |
| 2374.79              | 42.11               | -11.89                  | 54                          | 39.87                   | 32.83                       | 3.42                    | 34.01                      | 113                  | 311                     | Average |
| 2462                 | 109.93              | -                       | -                           | 107.48                  | 32.98                       | 3.64                    | 34.17                      | 124                  | 18                      | Peak    |
| 2462                 | 100.06              | -                       | -                           | 97.61                   | 32.98                       | 3.64                    | 34.17                      | 124                  | 18                      | Average |
| 2483.5               | 66.3                | -7.7                    | 74                          | 63.81                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 337                     | Peak    |
| 2483.5               | 50.36               | -3.64                   | 54                          | 47.87                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 337                     | Average |

## 3.8 Antenna Requirements

### 3.8.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### 3.8.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### 3.8.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

| Instrument                | Manufacturer | Model No. | Serial No.  | Characteristics | Calibration Date | Test Date     | Due Date      | Remark                |
|---------------------------|--------------|-----------|-------------|-----------------|------------------|---------------|---------------|-----------------------|
| Spectrum Analyzer         | R&S          | FSP40     | 100319      | 9kHz~40GHz      | Jan. 07, 2011    | Dec. 02, 2011 | Jan. 06, 2012 | Conducted (TH01-KS)   |
| System Simulator          | R&S          | CMU200    | 837587/066  | Full-Band       | Jan. 07, 2011    | Dec. 02, 2011 | Jan. 06, 2012 | Conducted (TH01-KS)   |
| DC Power Supply           | TOPWARD      | GPS-3030D | E1884515    | N/A             | Aug. 23, 2011    | Dec. 02, 2011 | Aug. 22, 2012 | Conducted (TH01-KS)   |
| Thermal Chamber           | Ten Billion  | TTC-B3S   | TBN-960502  | N/A             | Jan. 17, 2011    | Dec. 02, 2011 | Jan. 16, 2012 | Conducted (TH01-KS)   |
| EMI Receiver              | R&S          | ESCI7     | 100768      | 9kHz~7GHz       | Jun. 02, 2011    | Dec. 07, 2011 | Jun. 01, 2012 | Conduction (CO01-KS)  |
| LISN                      | MessTec      | AN3016    | 60103       | 9kHz~30MHz      | Jan. 07, 2011    | Dec. 07, 2011 | Jan. 06, 2012 | Conduction (CO01-KS)  |
| LISN                      | MessTec      | AN3016    | 60105       | 9kHz~30MHz      | Jan. 07, 2011    | Dec. 07, 2011 | Jan. 06, 2012 | Conduction (CO01-KS)  |
| AC Power Source           | Chroma       | 61602     | ABP00000811 | N/A             | Nov. 16, 2011    | Dec. 07, 2011 | Nov. 15, 2012 | Conduction (CO01-KS)  |
| EMI Test Receiver         | R&S          | ESCI      | 100534      | 9kHz~3GHz       | Nov. 09, 2011    | Dec. 07, 2011 | Nov. 08, 2012 | Radiation (03CH01-KS) |
| Spectrum Analyzer         | R&S          | FSP40     | 100319      | 9kHz~40GHz      | Jan. 07, 2011    | Dec. 07, 2011 | Jan. 06, 2012 | Radiation (03CH01-KS) |
| Bilog Antenna             | SCHAFFNER    | CBL6112D  | 23182       | 25MHz~2GHz      | Nov. 16, 2011    | Dec. 07, 2011 | Nov. 15, 2012 | Radiation (03CH01-KS) |
| Loop Antenna              | R&S          | HFH2-Z2   | 860004/00   | 9 kHz~30 MHz    | Jul. 28, 2011    | Dec. 07, 2011 | Jul. 27, 2012 | Radiation (03CH01-KS) |
| Double Ridge Horn Antenna | EMCO         | 3117      | 00075959    | 1GHz~18GHz      | Jan. 07, 2011    | Dec. 07, 2011 | Jan. 06, 2012 | Radiation (03CH01-KS) |
| Amplifier                 | Wireless     | FPA-6592G | 060004      | 30MHz~2GHz      | Nov. 16, 2011    | Dec. 07, 2011 | Nov. 15, 2012 | Radiation (03CH01-KS) |
| Amplifier                 | Agilent      | 8449B     | 3008A02370  | 1GHz~26.5GHz    | Jan. 07, 2011    | Dec. 07, 2011 | Jan. 06, 2012 | Radiation (03CH01-KS) |
| Active Horn Antenna       | com-power    | AHA-118   | 701023      | 1GHz -18GHz     | Nov. 07, 2011    | Dec. 07, 2011 | Nov. 06, 2012 | Radiation (03CH01-KS) |
| SHF-EHF Horn              | Schwarzbeck  | BBHA 9170 | BBHA170249  | 15GHz -40GHz    | Oct. 11, 2011    | Dec. 07, 2011 | Oct.10, 2012  | Radiation (03CH01-KS) |

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| Contribution                                                                             | Uncertainty of $X_i$ |                          | $u(X_i)$ |
|------------------------------------------------------------------------------------------|----------------------|--------------------------|----------|
|                                                                                          | dB                   | Probability Distribution |          |
| Receiver Reading                                                                         | 0.10                 | Normal (k=2)             | 0.05     |
| Cable Loss                                                                               | 0.10                 | Normal (k=2)             | 0.05     |
| AMN Insertion Loss                                                                       | 2.50                 | Rectangular              | 0.63     |
| Receiver Specification                                                                   | 1.50                 | Rectangular              | 0.43     |
| Site Imperfection                                                                        | 1.39                 | Rectangular              | 0.80     |
| Mismatch                                                                                 | +0.34 / -0.35        | U-Shape                  | 0.24     |
| <b>Combined Standard Uncertainty <math>U_c(y)</math></b>                                 | <b>1.13</b>          |                          |          |
| <b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b> | <b>2.26</b>          |                          |          |

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| Contribution                                                                             | Uncertainty of $X_i$ |                          | $u(X_i)$ |
|------------------------------------------------------------------------------------------|----------------------|--------------------------|----------|
|                                                                                          | dB                   | Probability Distribution |          |
| Receiver Reading                                                                         | 0.41                 | Normal (k=2)             | 0.21     |
| Antenna Factor Calibration                                                               | 0.83                 | Normal (k=2)             | 0.42     |
| Cable Loss Calibration                                                                   | 0.25                 | Normal (k=2)             | 0.13     |
| Pre-Amplifier Gain Calibration                                                           | 0.27                 | Normal (k=2)             | 0.14     |
| RCV/SPA Specification                                                                    | 2.50                 | Rectangular              | 0.72     |
| Antenna Factor Interpolation for Frequency                                               | 1.00                 | Rectangular              | 0.29     |
| Site Imperfection                                                                        | 1.43                 | Rectangular              | 0.83     |
| Mismatch                                                                                 | +0.39 / -0.41        | U-Shape                  | 0.28     |
| <b>Combined Standard Uncertainty <math>U_c(y)</math></b>                                 | <b>1.27</b>          |                          |          |
| <b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b> | <b>2.54</b>          |                          |          |

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

| Contribution                                                                                                                         | Uncertainty of $X_i$ |                          | $u(X_i)$ | $C_i$ | $C_i * u(X_i)$ |
|--------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------|----------|-------|----------------|
|                                                                                                                                      | dB                   | Probability Distribution |          |       |                |
| Receiver Reading                                                                                                                     | $\pm 0.10$           | Normal (k=2)             | 0.10     | 1     | 0.10           |
| Antenna Factor Calibration                                                                                                           | $\pm 1.70$           | Normal (k=2)             | 0.85     | 1     | 0.85           |
| Cable Loss Calibration                                                                                                               | $\pm 0.50$           | Normal (k=2)             | 0.25     | 1     | 0.25           |
| Receiver Correction                                                                                                                  | $\pm 2.00$           | Rectangular              | 1.15     | 1     | 1.15           |
| Antenna Factor Directional                                                                                                           | $\pm 1.50$           | Rectangular              | 0.87     | 1     | 0.87           |
| Site Imperfection                                                                                                                    | $\pm 2.80$           | Triangular               | 1.14     | 1     | 1.14           |
| Mismatch<br>Receiver VSWR $\Gamma_1 = 0.197$<br>Antenna VSWR $\Gamma_2 = 0.194$<br>Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$ | +0.34 / -0.35        | U-Shape                  | 0.244    | 1     | 0.244          |
| <b>Combined Standard Uncertainty<br/><math>U_c(y)</math></b>                                                                         | <b>2.36</b>          |                          |          |       |                |
| <b>Measuring Uncertainty for a<br/>Level of Confidence of 95%<br/>(<math>U = 2U_c(y)</math>)</b>                                     | <b>4.72</b>          |                          |          |       |                |



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP172910 as below.