

Contact person
Jörgen Wassholm
Electronics
+46 10 516 57 06
jorgen.wassholm@sp.se

Ericsson AB
Klaes Holm
PDU HW
164 80 Stockholm

Radio measurements on AIR 21 B4A/ B12P B5P 1700/ 2100 MHz radio equipment with FCC ID:TA8AKRC118048-1 and IC:287AB- AS1180481

(8 appendices)

Test object

AIR 21 B4A/ B12P B5P, KRC 118 048/1 Rev R1A

Summary

Standard	Compliant	Appendix
FCC CFR 47 / IC RSS-139		
2.1046 / RSS-139 6.4 RF power output	Yes	2
2.1049 / RSS-Gen 4.6.1 Occupied bandwidth	Yes	3
2.1051 / RSS-139 6.5 Band edge	Yes	4
2.1051 / RSS-139 6.5 Spurious emission at antenna terminals	Yes	5
2.1053 / RSS-139 6.5 Field strength of spurious radiation	Yes	6
2.1055 / RSS-139 6.3 Frequency stability	Yes	7

Note: Above RSS-139 items are given as cross-reference only. Measurements were performed according to ANSI procedures referenced by FCC and covered by SP's accreditation.

SP Technical Research Institute of Sweden Electronics - EMC

Performed by



Jörgen Wassholm

Examined by



Christer Karlsson

SP Technical Research Institute of Sweden

Postal address	Office location	Phone / Fax / E-mail
SP	Västerås	+46 10 516 50 00
Box 857	Brinellgatan 4	+46 33 13 55 02
SE-501 15 Borås	SE-504 62 Borås	info@sp.se
SWEDEN	SWEDEN	

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Test setups	Appendix 1
Purpose of test	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Frequency stability	Appendix 7
External photos	Appendix 8

Description of test object

Equipment:	Radio equipment AIR 21 B4A/ B12P B5P running in LTE mode
Frequency bands:	TX: 2110 – 2155 MHz RX: 1710 – 1755 MHz The highest and lowest EARFCNs and the corresponding frequencies for each supported channel BW configuration are listed below and are pursuant to 3GPP TS 36.141 section 5.7 Channel arrangement
Supported channel bandwidth configurations	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz and 20 MHz
Modulation and access scheme	OFDMA in FDD
OFDM subcarrier modulation	System information and pilots use BPSK and QPSK. For payload data QPSK, 16QAM and 64QAM can be used.
Nominal output power per antenna port:	Single carrier: 1x 44.8 dBm (1x30 W)
Number of antenna ports:	2 TX ports configured for TX diversity
Nominal supply voltage:	-48 VDC

Tested frequencies and EARFCNs for TX measurements

EARFCN	Frequency [MHz]	Comment
Downlink		
1957	2110.7	TX bottom (B) frequency in 1.4 MHz BW configuration
1965	2111.5	TX bottom (B) frequency in 3 MHz BW configuration
1975	2112.5	TX bottom (B) frequency in 5 MHz BW configuration
2000	2115.0	TX bottom (B) frequency in 10 MHz BW configuration
2025	2117.5	TX bottom (B) frequency in 15 MHz BW configuration
2050	2120.0	TX bottom (B) frequency in 20 MHz BW configuration
2175	2132.5	TX band mid (M) frequency in all BW configurations
2300	2145.0	TX top (T) frequency in 20 MHz BW configuration
2325	2147.5	TX top (T) frequency in 15 MHz BW configuration
2350	2150.0	TX top (T) frequency in 10 MHz BW configuration
2375	2152.5	TX top (T) frequency in 5 MHz BW configuration
2385	2153.5	TX top (T) frequency in 3 MHz BW configuration
2393	2154.3	TX top (T) frequency in 1.4 MHz BW configuration

Note: EARFCN are derived according to 3GPP TS 36.141, table 5.7.3-1.

Operation modes during measurements

Measurements were performed with the test object transmitting test models as defined in 3GPP TS 36.141. Test model E-TM1.1 was used to represent QPSK, test model E-TM3.2 to represent 16QAM and test model E-TM3.1 to represent 64QAM payload modulation.

The setting TX single carrier with test model E-TM1.1 in channel bandwidth configuration 1.4 MHz was found to be representative for all traffic scenarios when several settings with different modulations and channel bandwidth configurations were compared to find a worst case setting. This setting was used for all measurements unless noted otherwise.

The test object was powered with -48 VDC unless noted otherwise. All measurements were performed with the test object configured for maximum transmit power.

Conducted measurements

The EUT was a pole mounted unit supplied with -48 VDC by an external power supply. All TX parameters were measured at port RF A with port RF B terminated into 50 ohm. Complete measurements were made on RF A with additional measurements on RF B to verify that the ports are identical.

Radiated measurements

The test object was powered with -48 VDC. All measurements were performed with the test object configured for maximum transmit power. The RF A output power port was via a RF attenuator connected to functional test equipment for supervision. RF B output power port was terminated in a 50 ohm load.

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable parts of FCC CFR 47, IC RSS-139 and IC RSS-Gen.

References

Measurements were done according to relevant parts of the following standards:

ANSI C63.4-2009

ANSI/TIA/EIA-603-C-2004

3GPP TS 36.141, version 8.5.0

CFR 47 part 2, October 1st, 2011

CFR 47 part 24 Subpart E, October 1st, 2011

RSS-139 Issue 2

RSS-Gen Issue 3

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 1

Measurement equipment

Measurement equipment	Calibration Due	SP number
Test site Tesla	2014-01	503 881
R&S FSIQ 40	2012-07	503 738
R&S FSQ 40	2012-07	504 143
R&S ESI 26	2012-07	503 292
R&S FSQ 40, BAMS - 1000294394	2013-03	-
Control computer with R&S software EMC32 version 8.52.0	-	503 479
High pass filter	2012-07	504 199
High pass filter	2013-01	901 373
High pass filter	2012-07	503 739
High pass filter	2012-07	503 740
RF attenuator	2012-07	504 159
RF attenuator	2012-07	900 233
Chase Bilog Antenna CBL 6111A	2013-10	503 182
EMCO Horn Antenna 3115	2014-01	502 175
Std.gain horn FLANN model 20240-20	-	503 674
µComp Nordic, Low Noise Amplifier	2013-03	901 545
MITEQ Low Noise Amplifier	2012-07	503 285
Temperature cabinet	-	503 360
Testo 635 Temperature and humidity meter	2013-05	504 203

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered: 2012-08-30.

Manufacturer's representative

Christer Gustavsson, Ericsson AB

Test engineers


Andreas Johnson Tomas Isbring, Hyder Khalaf, Kexin Chen, Jörgen Wassholm, and Martin Theorin, SP

Test participant

Mikael Jansson, Ericsson AB (Partially present)

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 1

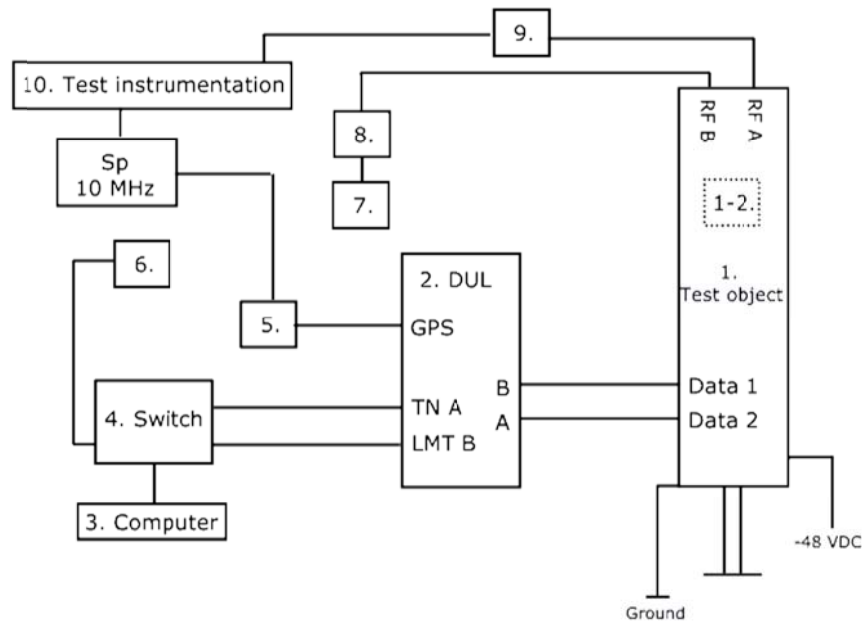
Test set-up conducted measurements TX
Test set-up conducted measurements TX


1. AIR 21 B4A/B2P, KRC 118 046/1, rev. R1B, s/n: CQ30001893
with software (PIS) CXP 901 3268/6 rev. R44GK
1-2 Transceiver, ARUS B4 1/KRC 118 046, revision R1A

Functional test equipment

2. DUL 20 01, KDU 137 533/4, revision R1A, S/N: C823562991
3. Computer HP Elitebook 8540w, BAMS – 1001052043
4. Fast Ethernet switch, Netgear FS276T
5. Jointing Box, NCD 901 40/1, R1A, S/N A401222750
6. Rubidium Frequency Standard Symmetricom 8040, BAMS – 100071418
7. Attenuator
8. Terminator
9. SP test instrument according measurement equipment list
10. SP test instrument according measurement equipment list

Test set-up, radiated measurements

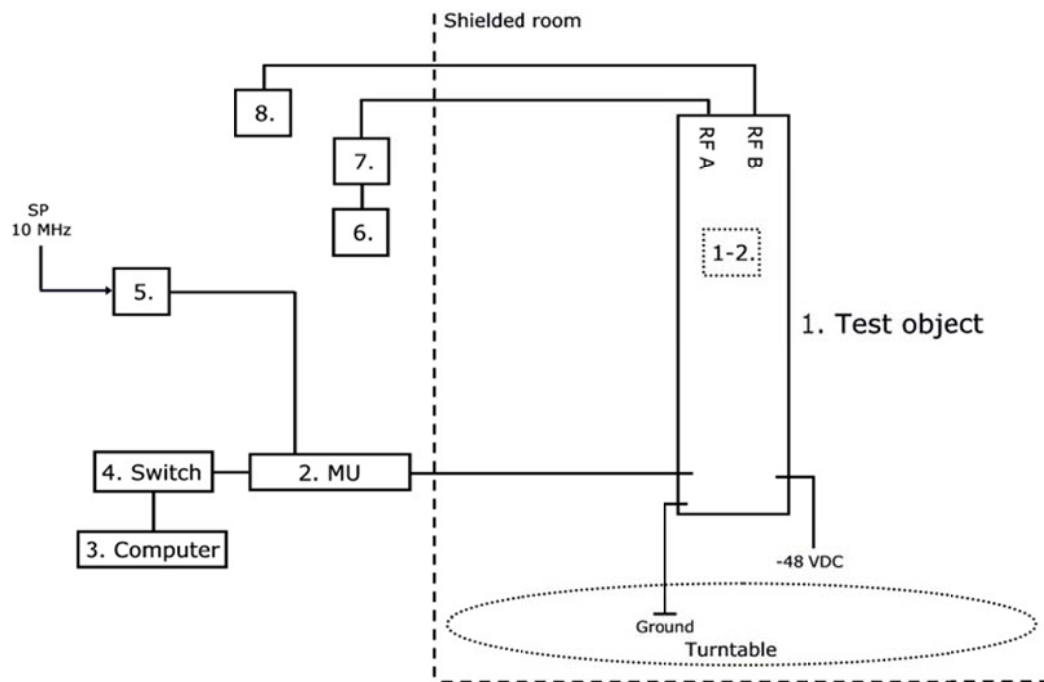

Test object

1. AIR 21 B4A/ B12P B5P, KRC 118 048/1, revision R1A, S/N: CQ30020326
(FCC ID:TA8AKRC118048-1 / IC:287AB-AS1180481)
with software (PIS) CXP 901 3268/6 rev. R44GK
1-2 Tranceiver, ARUS B4 1/KRC 118 046, revision R1A

Functional test equipment

2. DUL 20 01, KDU 137 533/4, revision R1F, S/N: C825557510
SUP 6601 1/BFL 901 009/1 Rev R2B, S/N. BR80882600
3. Computer HP Elitebook 8540w, BAMS – 1001052042
4. Fast Ethernet switch, Netgear GS108E
5. Jointing Box, NCD 901 40/1, R1A, S/N: A401236814
6. R&S ESI 26, for monitoring the RF signal
7. Attenuator
8. Terminator

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 1

Test object ports

Interface:	Type of port:
Supply power -48 VDC	DC Power
Antenna port (A), 7/16 connector, N/A in this configuration	Antenna
Antenna port (B), 7/16 connector, N/A in this configuration	Antenna
Opto 1, Optical Interface Link, single mode opto fibre	Telecom
Opto 2, Optical Interface Link, single mode opto fibre	Telecom
Ground wire	Ground

RBS software

Software	Revision
CXP 102 051/16	R16AZ

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 2

RF power output measurements according to CFR 47 §27.50 / IC RSS-139 6.4

Date	Temperature	Humidity
2012-06-11	22 °C ± 3 °C	46 % ± 5 %
2012-06-12	22 °C ± 3 °C	39 % ± 5 %

Test set-up and procedure

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A resolution bandwidth of 50 MHz was used.

Measurement equipment	SP number
RF attenuator	504 159
Testo 635, temperature and humidity meter	504 203
Rhode & Schwarz FSQ26	504 143

Measurement uncertainty: 1.1 dB
Results

Single carrier: Rated output power level at RF A connector 1x 44.8 dBm

EARFCN	Carrier BW (MHz)	Result RMS (dBm)	10log(N) ¹⁾ (dBm)	Result RMS (dBm/ MHz) ²⁾
B	1.4	44.4	47.4	47.0
B	20.0	44.6	47.6	35.1
M	1.4	44.5	47.5	47.1
M	3.0	44.6	47.6	43.3
M	5.0	44.6	47.6	41.1
M	10.0	44.5	47.5	38.0
M	15.0	44.6	47.6	36.3
M	20.0	44.6	47.6	35.1
T	1.4	44.6	47.6	47.2
T	20.0	44.6	47.6	35.1

Single carrier: Rated output power level at RF B connector 1x44.8 dBm

EARFCN	Carrier BW (MHz)	Result RMS (dBm)	10log(N) ¹⁾ (dBm)	Result RMS (dBm/ MHz) ²⁾
B	1.4	44.5	47.5	47.1
B	20	44.6	47.6	35.1

¹⁾: 2 outputs summed power according to FCC KDB662911 Multiple transmitter output v01r01

²⁾: Power density (dBm/MHz) for a 5 MHz BW= Output power -10log(OBW/1MHz)

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 2

Diagram	BW configuration	Tested frequency
1	1.4 MHz	B
2	20 MHz	B
3	1.4 MHz	M
4	3 MHz	M
5	5 MHz	M
6	10 MHz	M
7	15 MHz	M
8	20 MHz	M
9	1.4 MHz	T
10	20 MHz	T
11	1.4 MHz	M, RF B
12	20 MHz	M, RF B

Limits

§27.50: The maximum output power may not exceed 1640 W (EIRP) / MHz.
The Peak to Average Ratio (PAR) may not exceed 13 dB.


RSS-139 6.4: The average equivalent isotropically radiated power (e.i.r.p.) limits in SRSP-513 apply, resulting in a maximum EIRP of 1640 W / MHz for the scope of this report. The peak-to-average ratio of the power shall not exceed 13 dB.

Complies?	Yes
-----------	-----

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 2

Diagram 1:

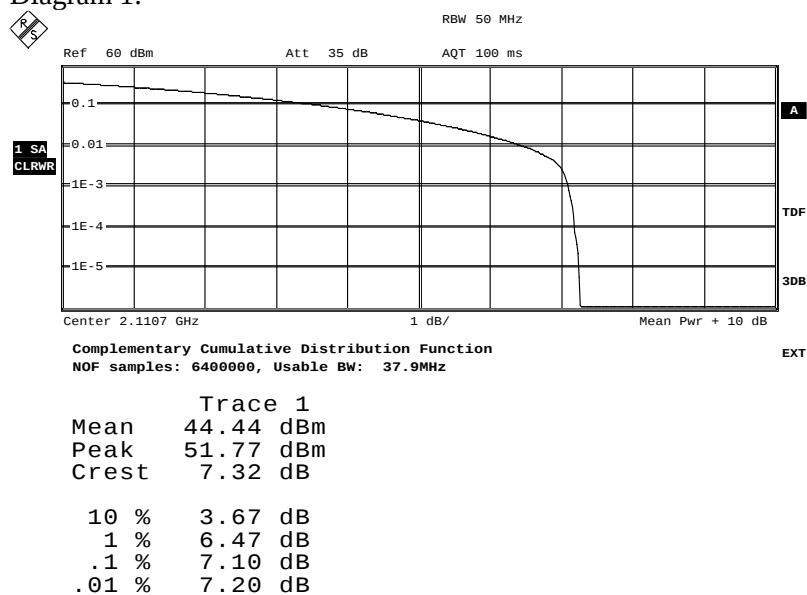

Date: 11.JUN.2012 18:47:17

Diagram 2:

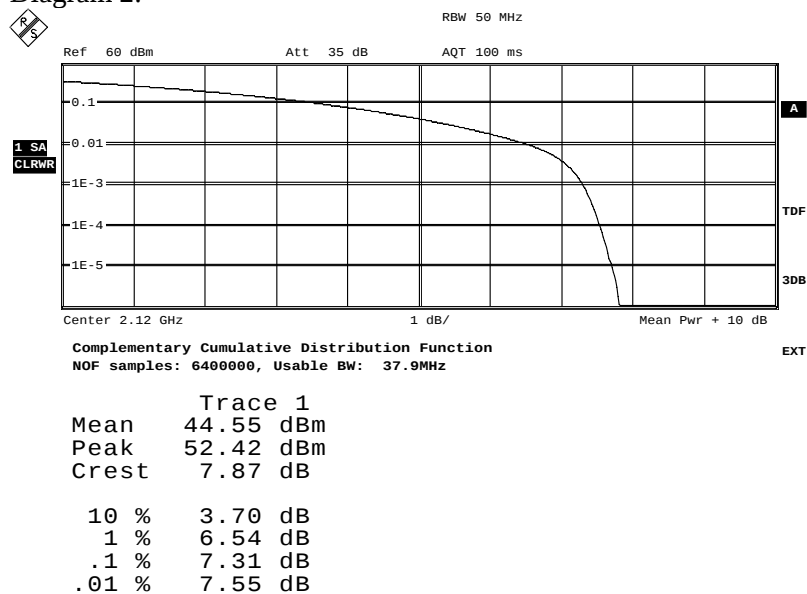


Date: 11.JUN.2012 14:12:16

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 2

Diagram 3:

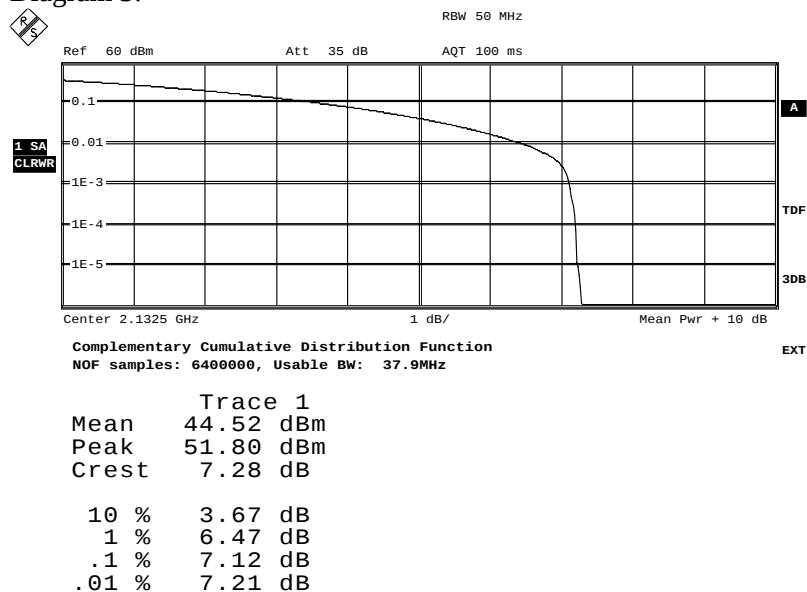

Date: 11.JUN.2012 11:55:11

Diagram 4:

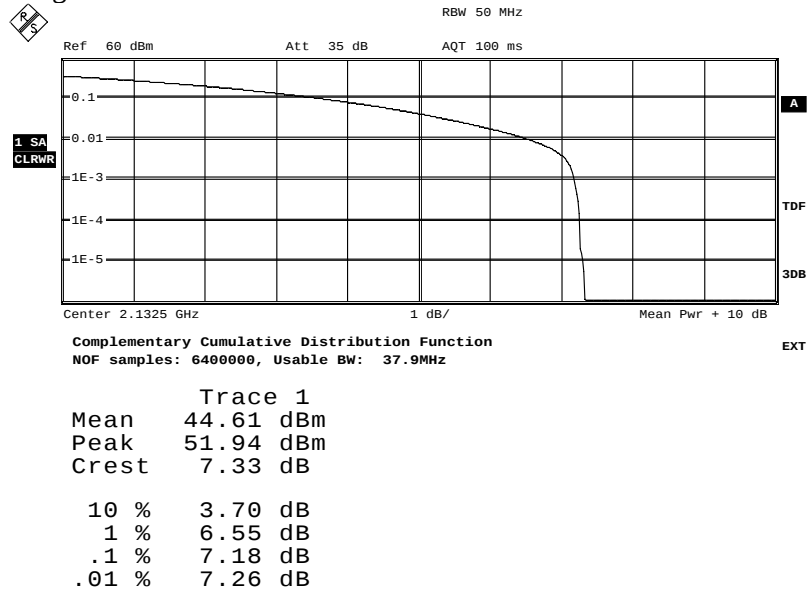


Date: 11.JUN.2012 10:54:38

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 2

Diagram 5:

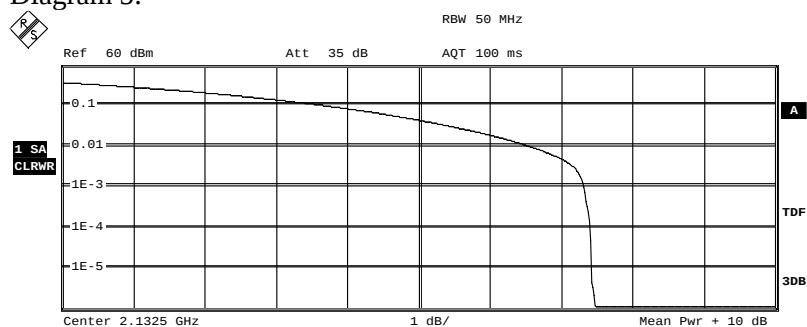


Complementary Cumulative Distribution Function
NOF samples: 6400000, Usable BW: 37.9MHz

Trace 1
Mean 44.60 dBm
Peak 52.08 dBm
Crest 7.49 dB

10 % 3.70 dB
1 % 6.55 dB
.1 % 7.32 dB
.01 % 7.40 dB

Date: 11.JUN.2012 10:18:31

Diagram 6:

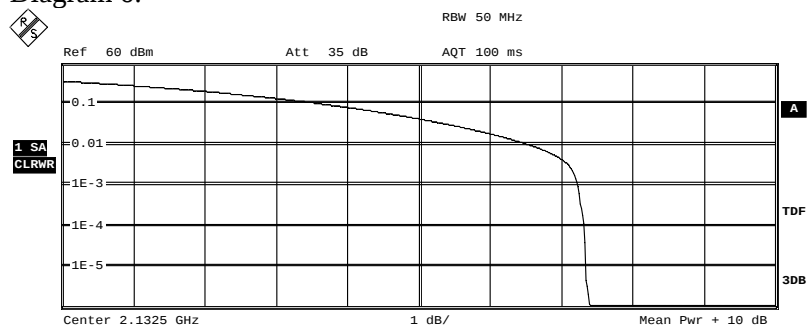

Complementary Cumulative Distribution Function
NOF samples: 6400000, Usable BW: 37.9MHz

Trace 1
Mean 44.54 dBm
Peak 51.94 dBm
Crest 7.41 dB


10 % 3.70 dB
1 % 6.55 dB
.1 % 7.23 dB
.01 % 7.32 dB

Date: 11.JUN.2012 12:12:30

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 2

Diagram 7:

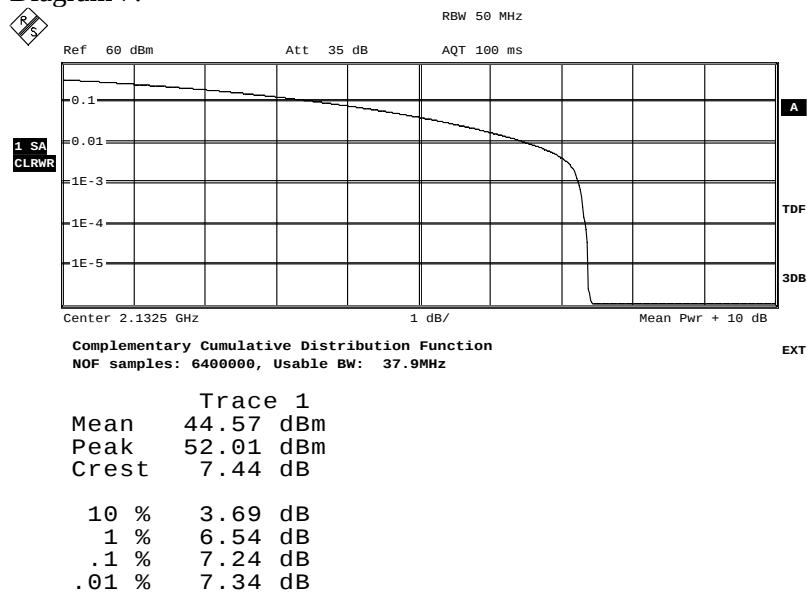

Date: 11.JUN.2012 12:27:33

Diagram 8:

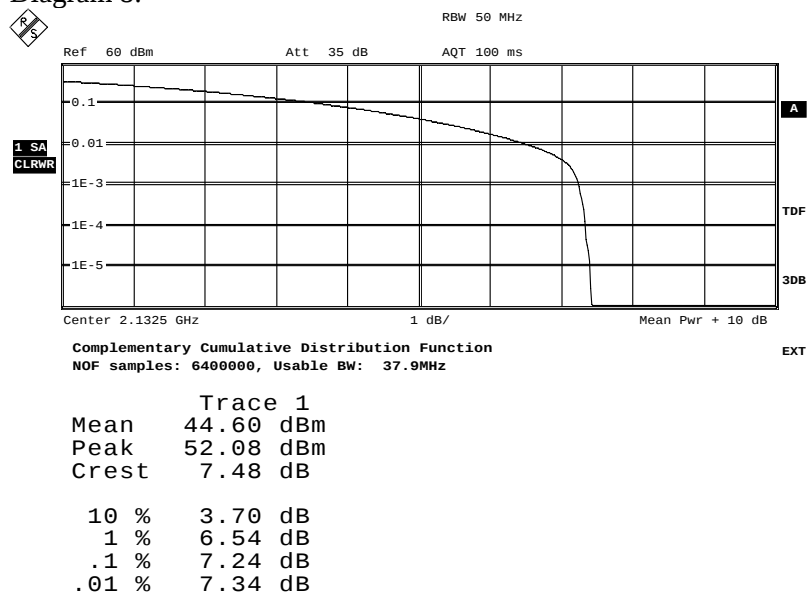


Date: 11.JUN.2012 12:43:18

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 2

Diagram 9:

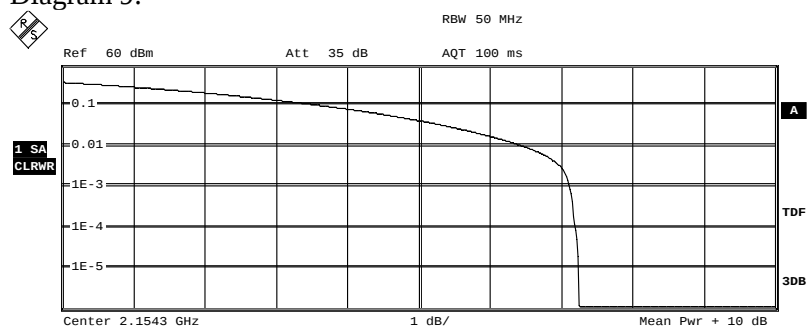


Complementary Cumulative Distribution Function
NOF samples: 6400000, Usable BW: 37.9MHz

Trace 1
Mean 44.46 dBm
Peak 51.77 dBm
Crest 7.31 dB

10 % 3.67 dB
1 % 6.46 dB
.1 % 7.12 dB
.01 % 7.20 dB

Date: 15.JUN.2012 12:42:40

Diagram 10:

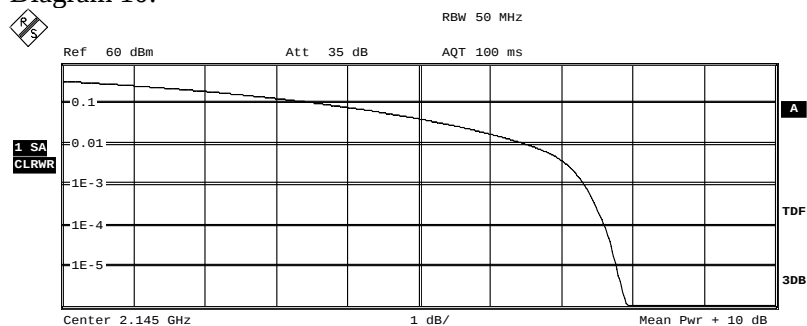

Complementary Cumulative Distribution Function
NOF samples: 6400000, Usable BW: 37.9MHz

Trace 1
Mean 44.59 dBm
Peak 52.60 dBm
Crest 8.00 dB


10 % 3.70 dB
1 % 6.52 dB
.1 % 7.32 dB
.01 % 7.61 dB

Date: 11.JUN.2012 13:00:01

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 2

Diagram 11

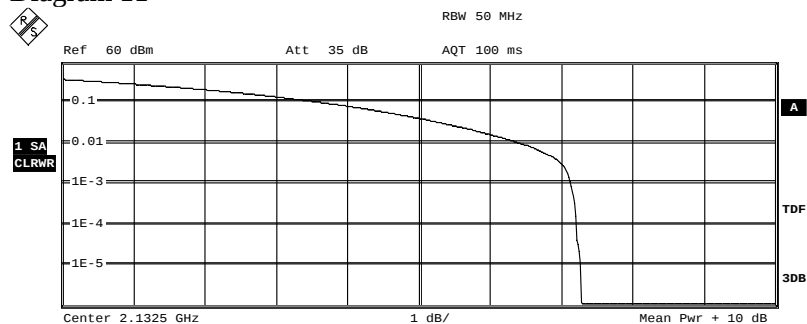

Complementary Cumulative Distribution Function
NOF samples: 6400000, Usable BW: 37.9MHz


EXT

Trace 1
Mean 44.45 dBm
Peak 51.73 dBm
Crest 7.28 dB

10 % 3.67 dB
1 % 6.43 dB
.1 % 7.13 dB
.01 % 7.21 dB

Date: 12.JUN.2012 10:48:38

Diagram 12:

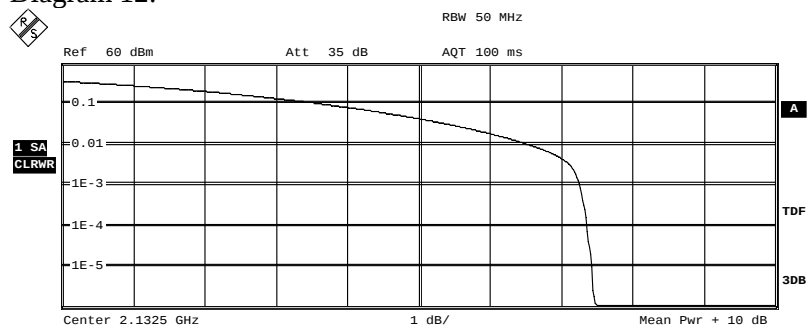

Complementary Cumulative Distribution Function
NOF samples: 6400000, Usable BW: 37.9MHz

EXT

Trace 1
Mean 44.58 dBm
Peak 52.08 dBm
Crest 7.51 dB

10 % 3.70 dB
1 % 6.55 dB
.1 % 7.26 dB
.01 % 7.37 dB

Date: 12.JUN.2012 11:06:42

Occupied bandwidth measurements according to 47 CFR 2.1049 / IC RSS-Gen 4.6.1

Date	Temperature	Humidity
2012-06-11	22 °C ± 3 °C	46 % ± 5 %
2012-06-12	22 °C ± 3 °C	39 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a signal analyzer with the RMS detector activated. The signal analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	504 159
Testo 615 temperature and humidity meter	503 498

Measurement uncertainty: 3.7 dB

Results


The results are shown in appendix 3.1

Diagram	BW configuration	Tested frequency	OBW / [MHz]
1	1.4 MHz	B	1.09
2	20 MHz	B	17.86
3	1.4 MHz	M	1.09
4	3 MHz	M	2.69
5	5 MHz	M	4.48
6	10 MHz	M	8.93
7	15 MHz	M	13.42
8	20 MHz	M	17.86
9	1.4 MHz	T	1.09
10	20 MHz	T	17.84
11	1.4 MHz	M, RF B	1.09
12	20 MHz	M, RF B	17.88

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 3

Diagram 1

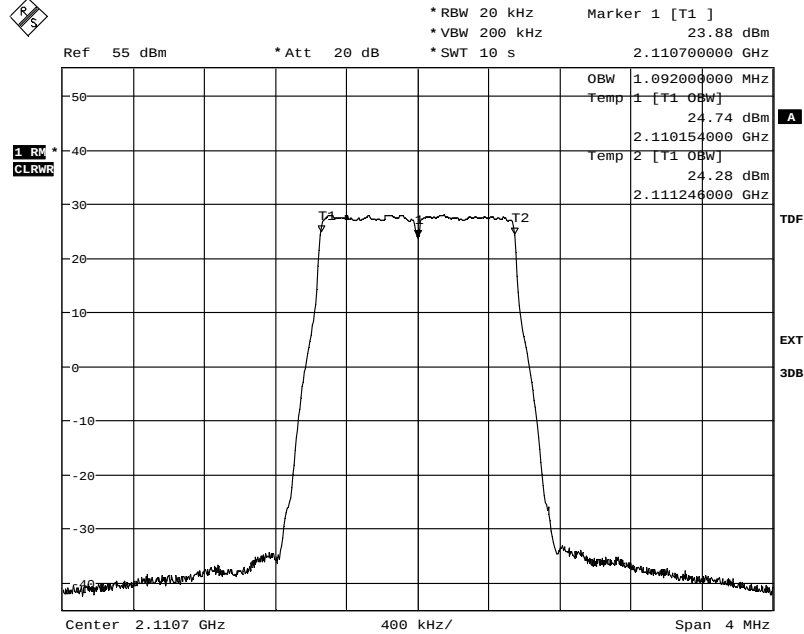

Date: 11.JUN.2012 18:50:24

Diagram 2

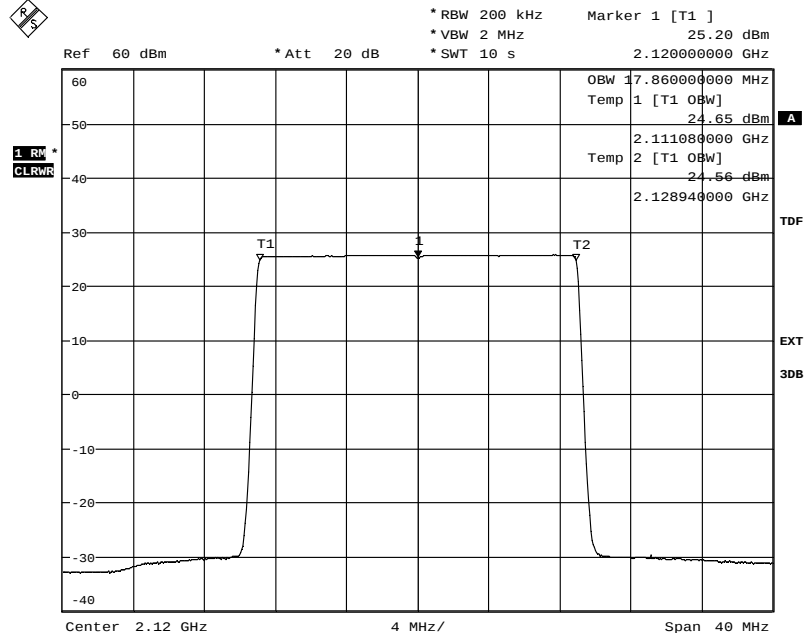


Date: 11.JUN.2012 19:48:24

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 3

Diagram 3

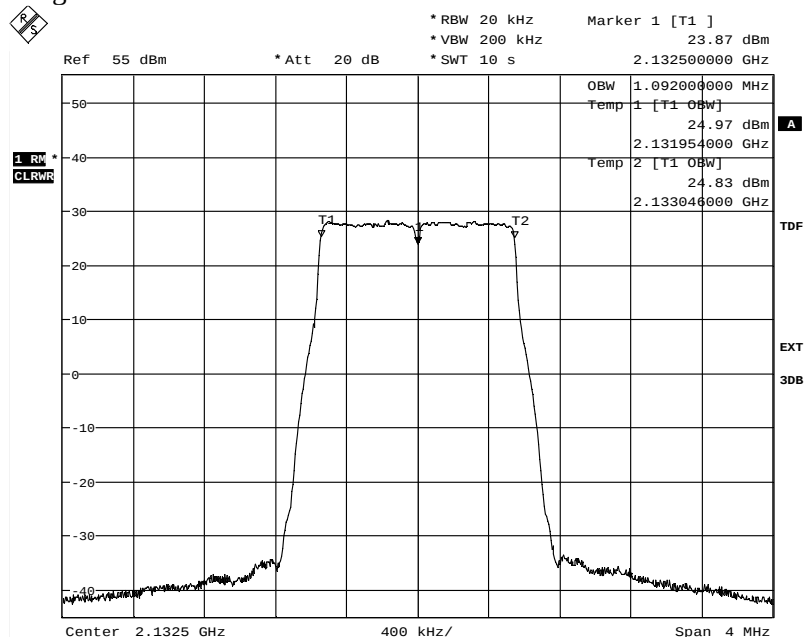

Date: 11.JUN.2012 11:58:59

Diagram 4

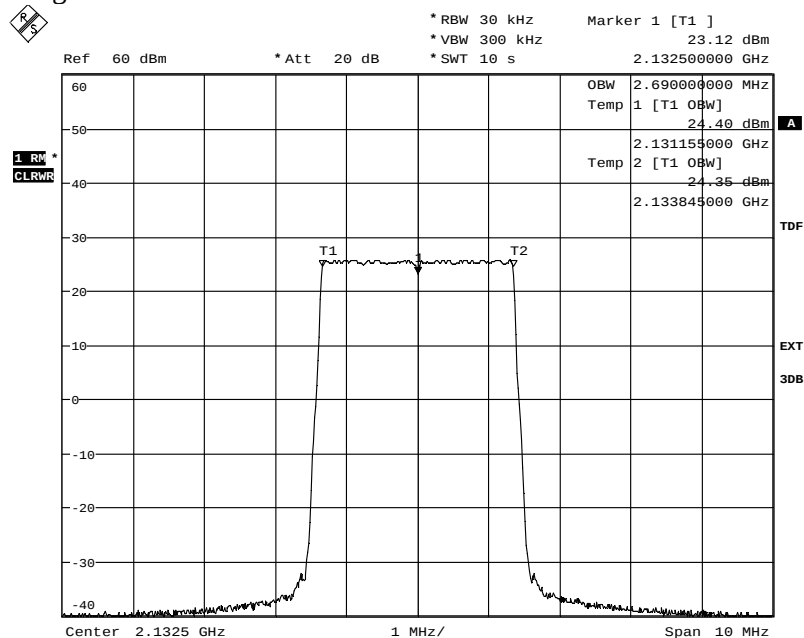


Date: 12.JUN.2012 09:28:44

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 3

Diagram 5

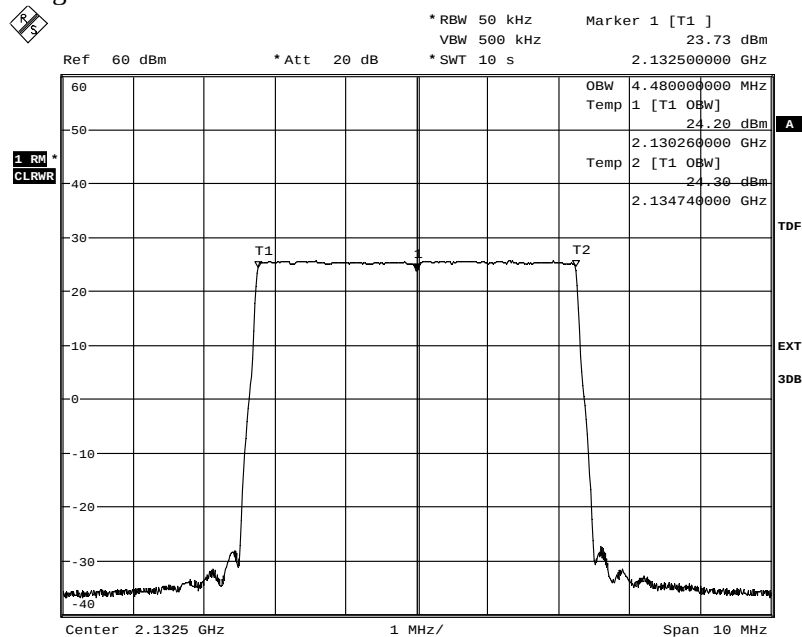

Date: 11.JUN.2012 10:29:08

Diagram 6

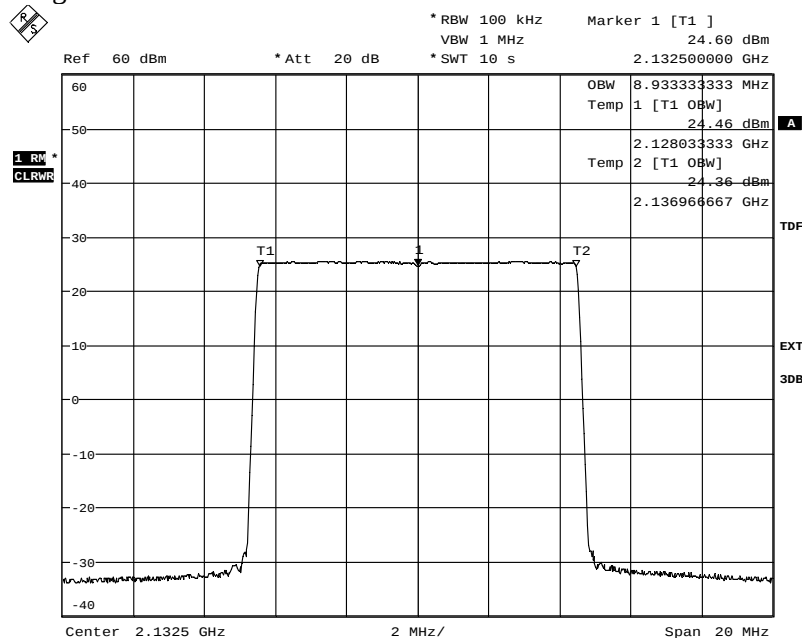


Date: 11.JUN.2012 12:15:13

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 3

Diagram 7

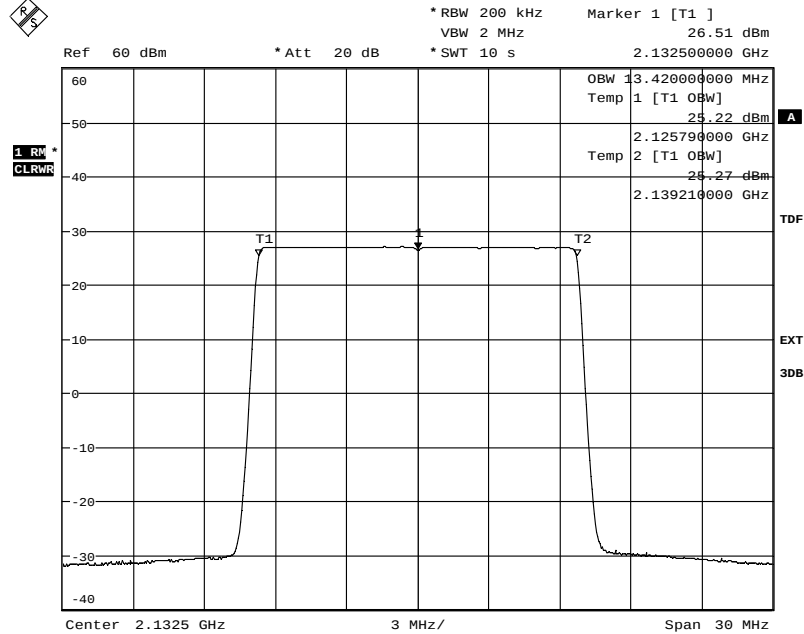

Date: 11.JUN.2012 12:29:44

Diagram 8

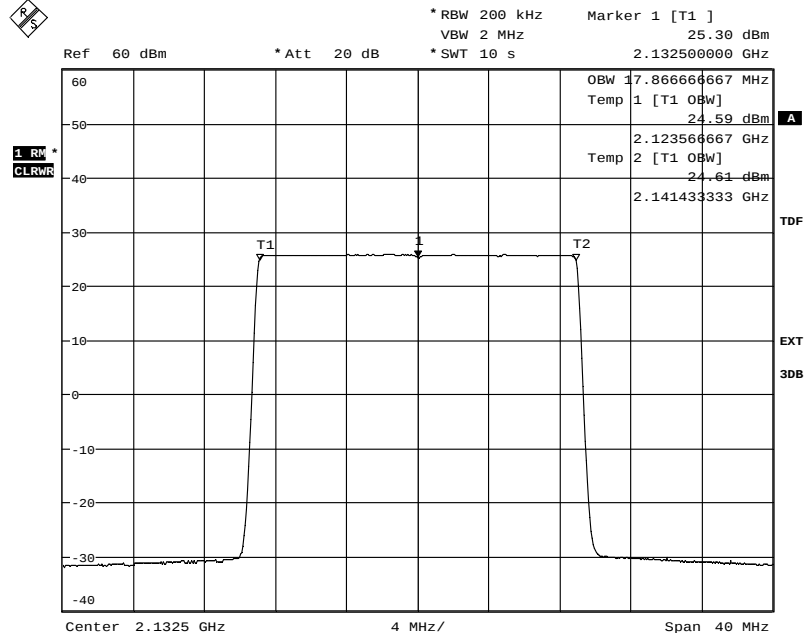


Date: 11.JUN.2012 12:45:40

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 3

Diagram 9

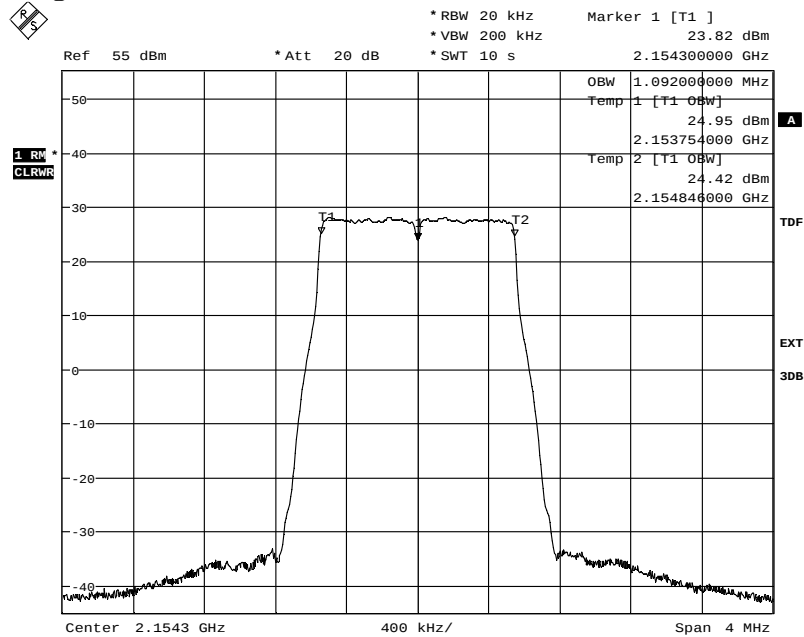

Date: 12.JUN.2012 09:32:25

Diagram 10

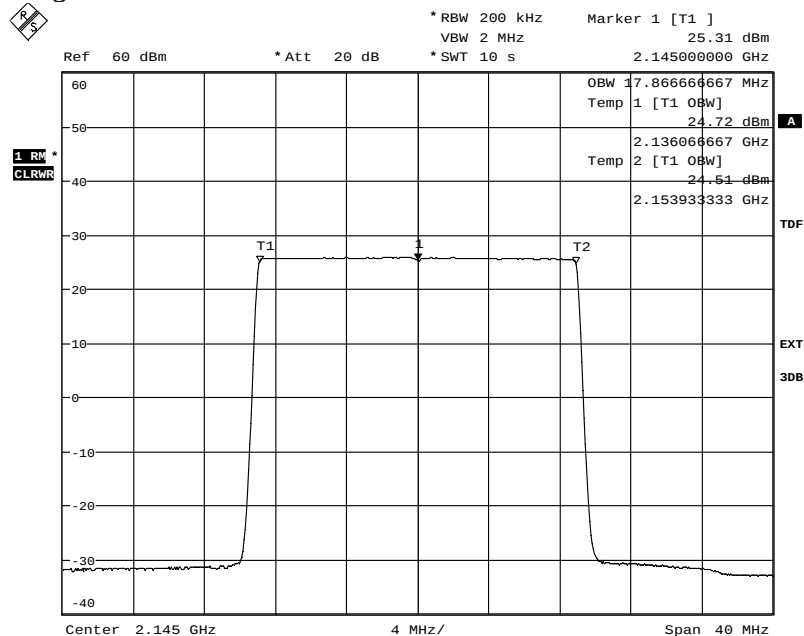


Date: 11.JUN.2012 13:03:34

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 3

Diagram 11

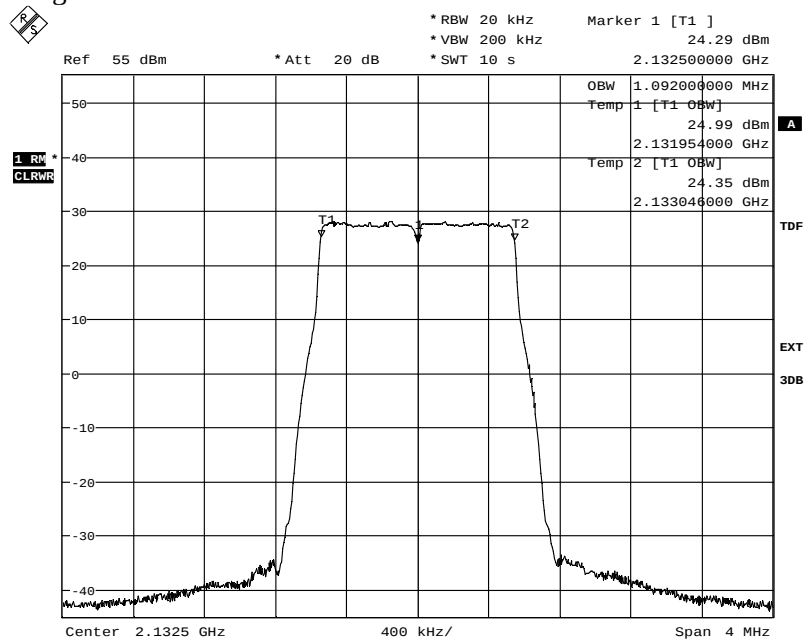

Date: 12.JUN.2012 10:50:34

Diagram 12

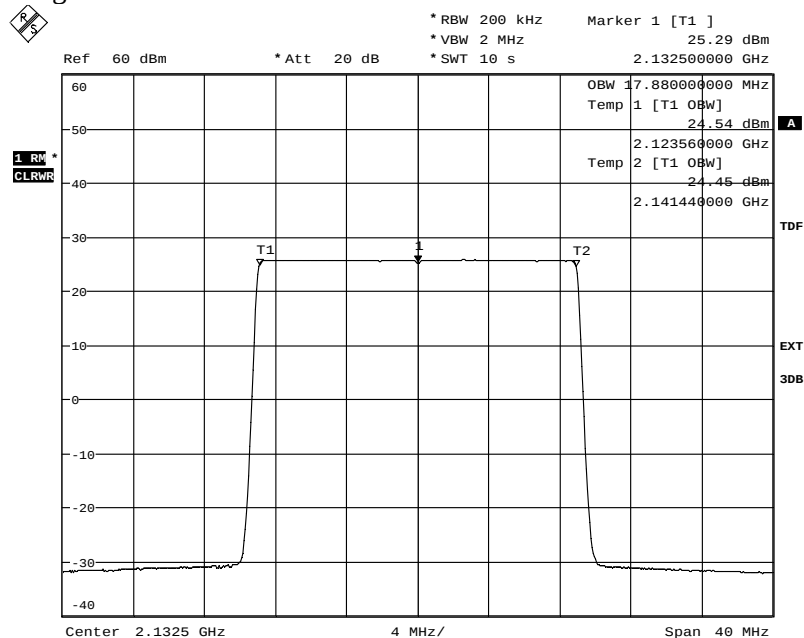

Date: 12.JUN.2012 11:09:04

Band edge measurements according to CFR 47 §27.53(h) / IC RSS-139 6.5

Date	Temperature	Humidity
2012-06-11	22 °C ± 3 °C	46 % ± 5 %
2012-06-12	22 °C ± 3 °C	39 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §27.53(h) The test object was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Beyond the 1st MHz off the band edges the limit was adjusted to compensate for reduced measurement bandwidths pursuant to the FCC rules, specifying a RBW of at least 1% of the fundamental emission bandwidth up to 1 MHz away from the band edges and a RBW of 1 MHz for measurements of emissions more than 1 MHz away from the band edges.

A resolution bandwidth of 200 kHz was used 1 MHz to 6 MHz away from the band edges, to compensate for the reduced resolution bandwidth and 10 log (N) according to FCC KDB662911, the limit was adjusted by 7 dB to -23 dBm.

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	504 159
Testo 615 temperature and humidity meter	503 498

Measurement uncertainty: 3.7 dB

Results

The results are shown in appendix 4.1

Diagram	BW configuration	Tested frequency
1 a+b+c	1.4 MHz	B
2 a+b+c	3 MHz	B
3 a+b+c	5 MHz	B
4 a+b+c	10 MHz	B
5 a+b+c	15 MHz	B
6 a+b+c	20 MHz	B
7 a+b+c	1.4 MHz	T
8 a+b+c	3 MHz	T
9 a+b+c	5 MHz	T
10 a+b+c	10 MHz	T
11 a+b+c	15 MHz	T
12 a+b+c	20 MHz	T
13 a+b+c	1.4 MHz	B, RF B
14 a+b+c	1.4 MHz	T, RF B



REPORT

Date
2012-10-23

Reference
FX217442-F27L

Page
2 (30)

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Limits

CFR 47 §27.53(h) and RSS-139 6.5


Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 1 a

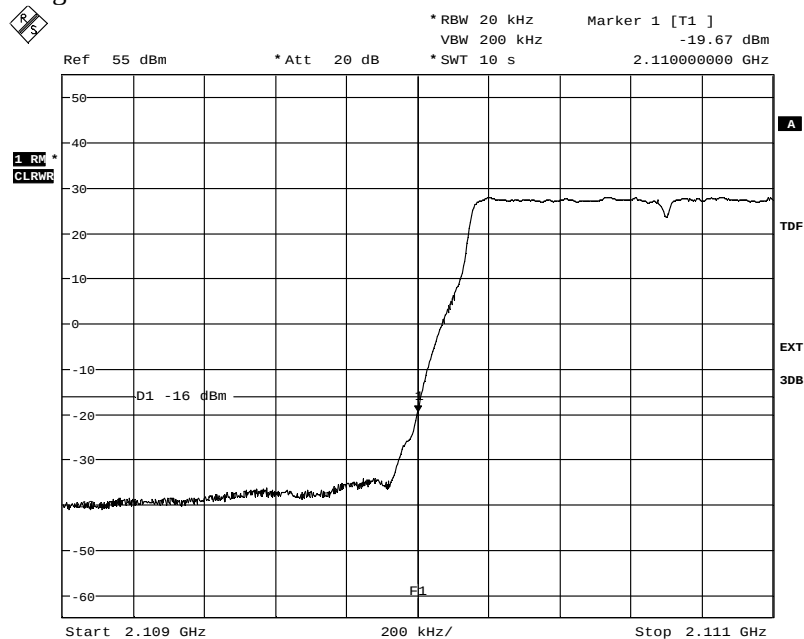

Date: 11.JUN.2012 18:54:05

Diagram 1 b

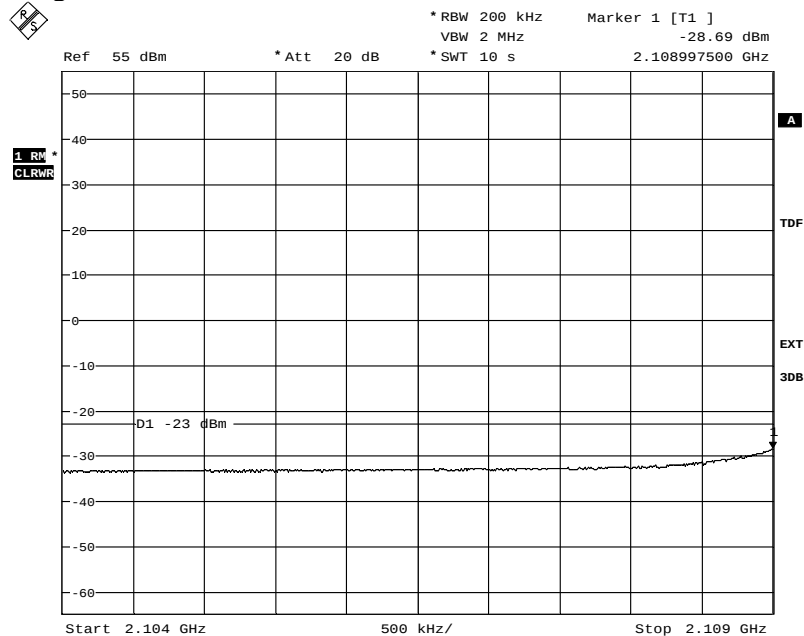


Date: 11.JUN.2012 18:55:39

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 1 c

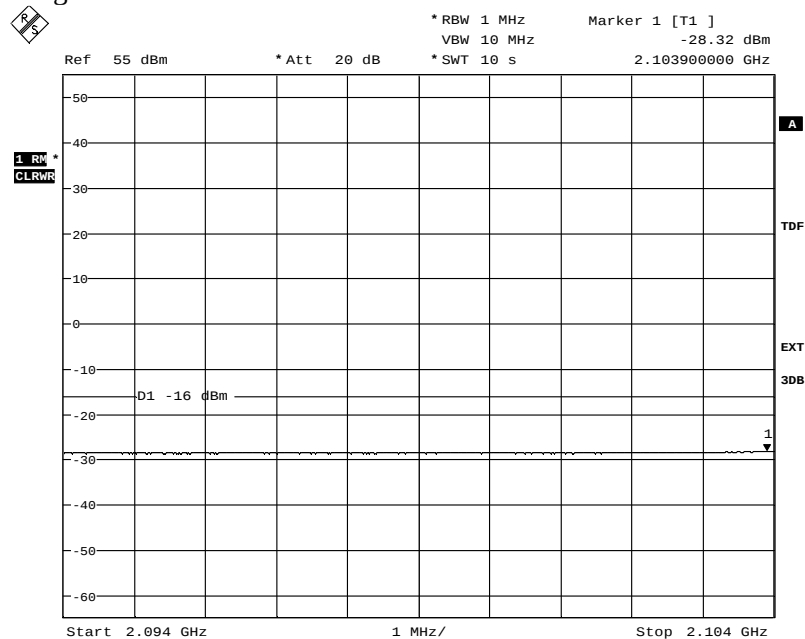


Date: 11.JUN.2012 18:57:11

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 2 a

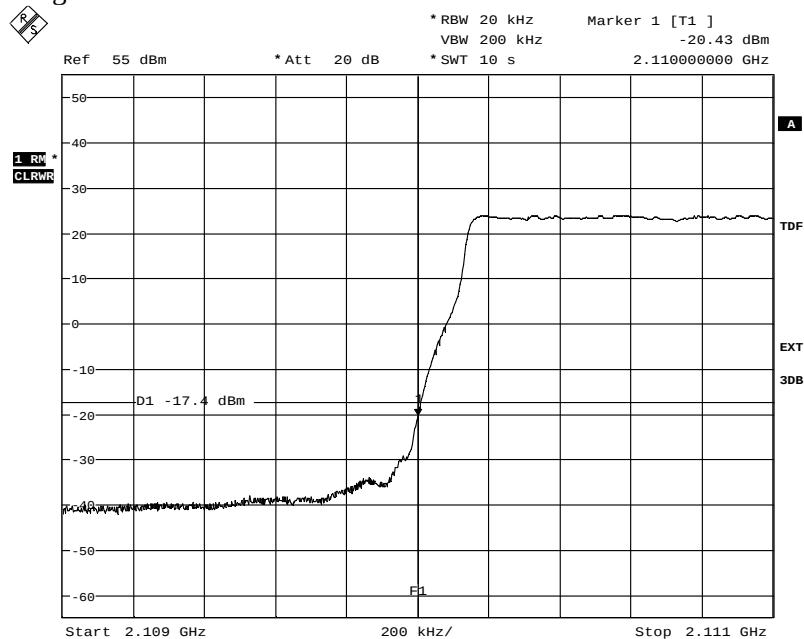

Date: 11.JUN.2012 19:56:30

Diagram 2 b

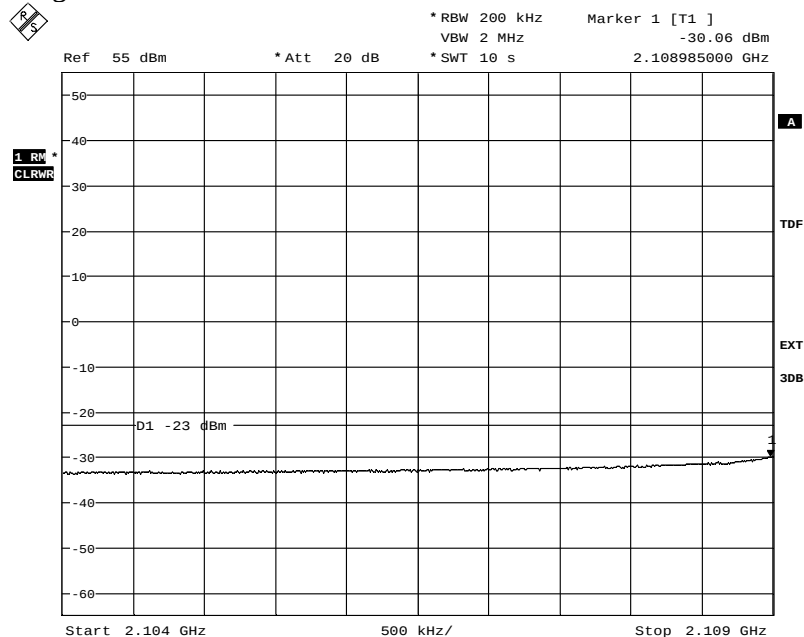


Date: 11.JUN.2012 19:57:17

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 2 c

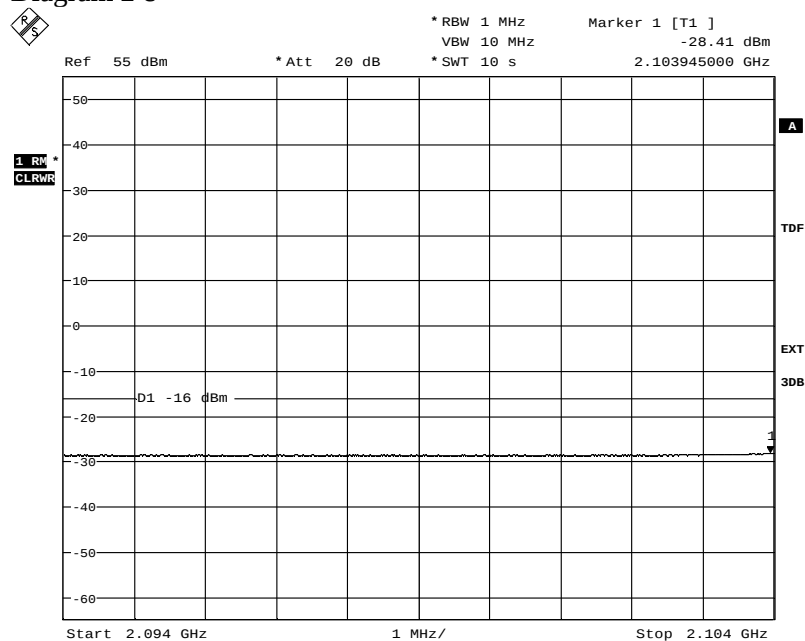


Date: 11.JUN.2012 19:57:59

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 3 a

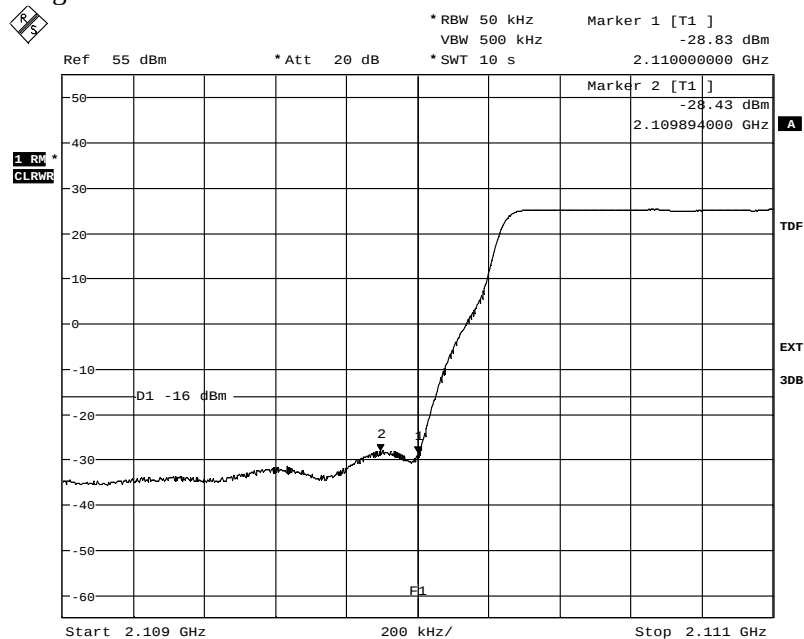

Date: 11.JUN.2012 20:14:57

Diagram 3 b

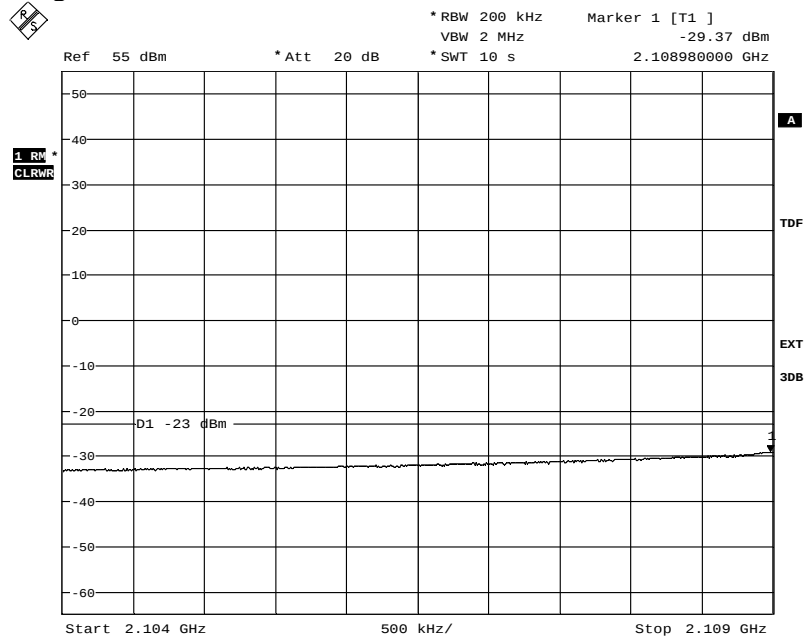


Date: 11.JUN.2012 20:15:34

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 3 c

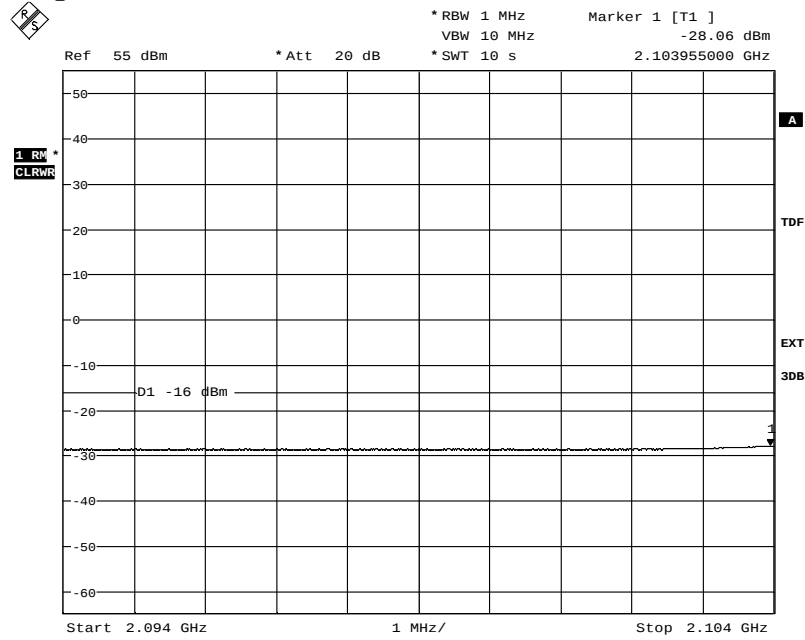


Date: 11.JUN.2012 20:16:14

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 4 a

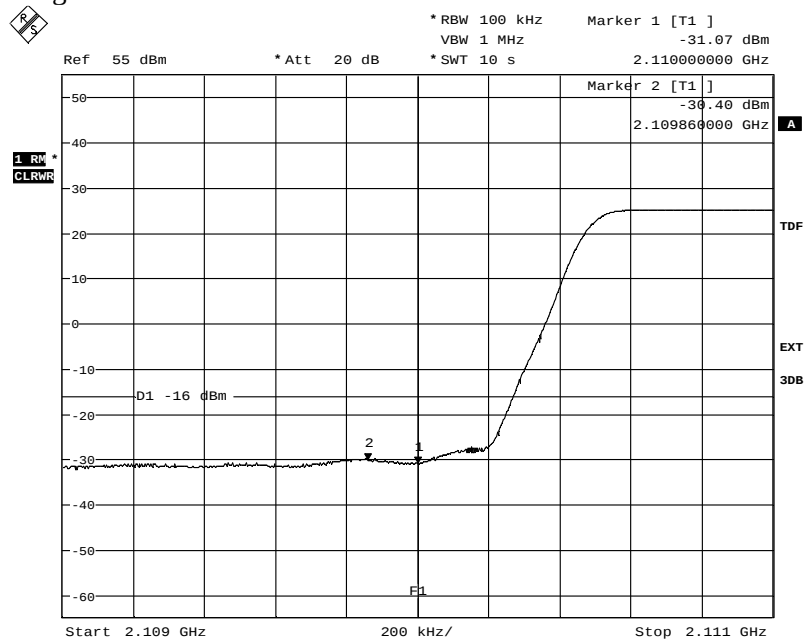

Date: 12.JUN.2012 08:21:15

Diagram 4 b

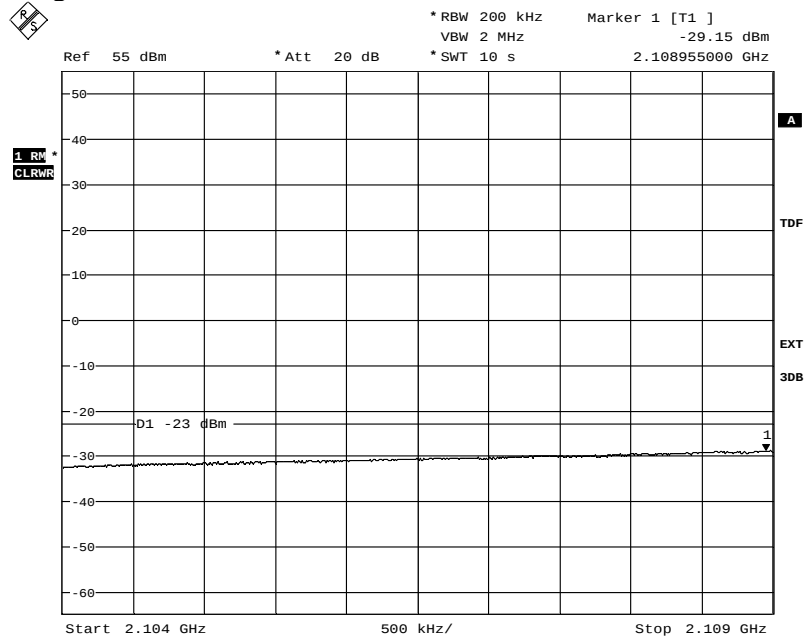


Date: 12.JUN.2012 08:21:56

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 4 c

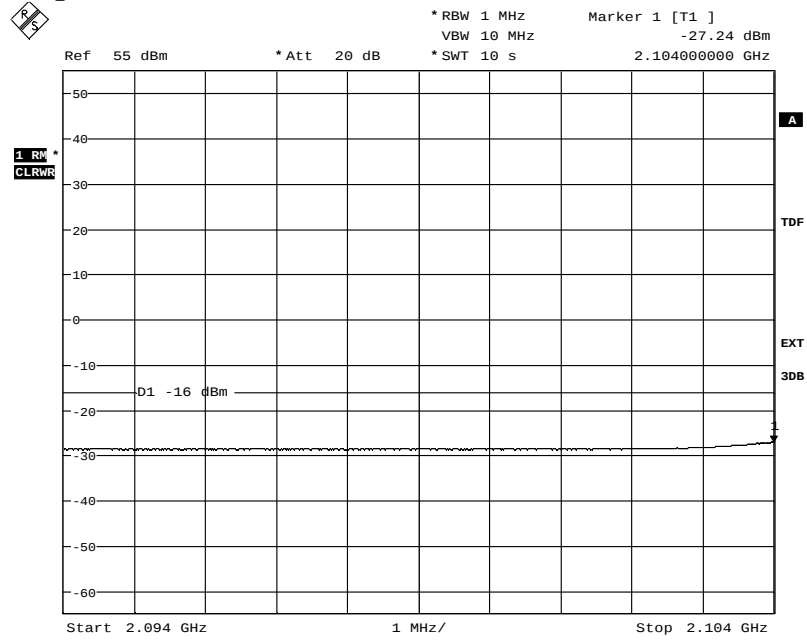


Date: 12.JUN.2012 08:22:37

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 5 a

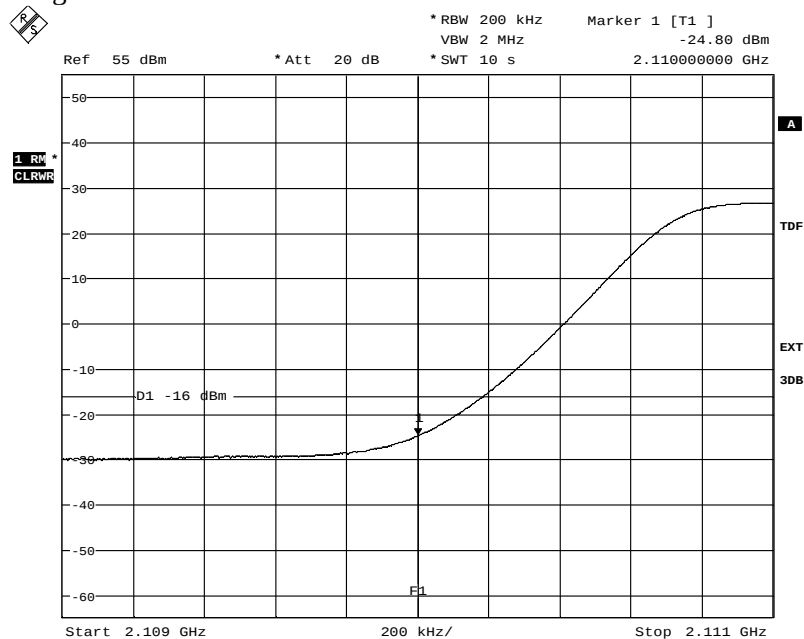

Date: 12.JUN.2012 08:36:59

Diagram 5 b

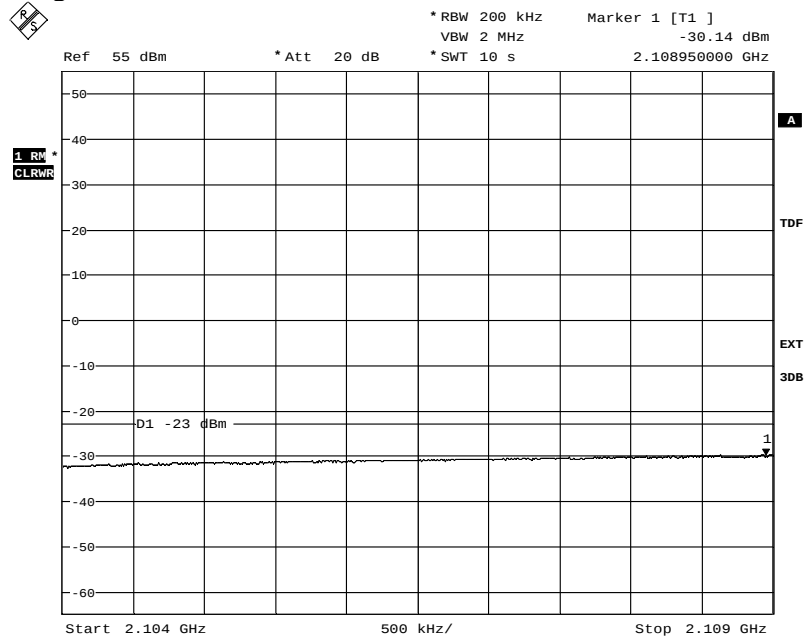


Date: 12.JUN.2012 08:37:38

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 5 c

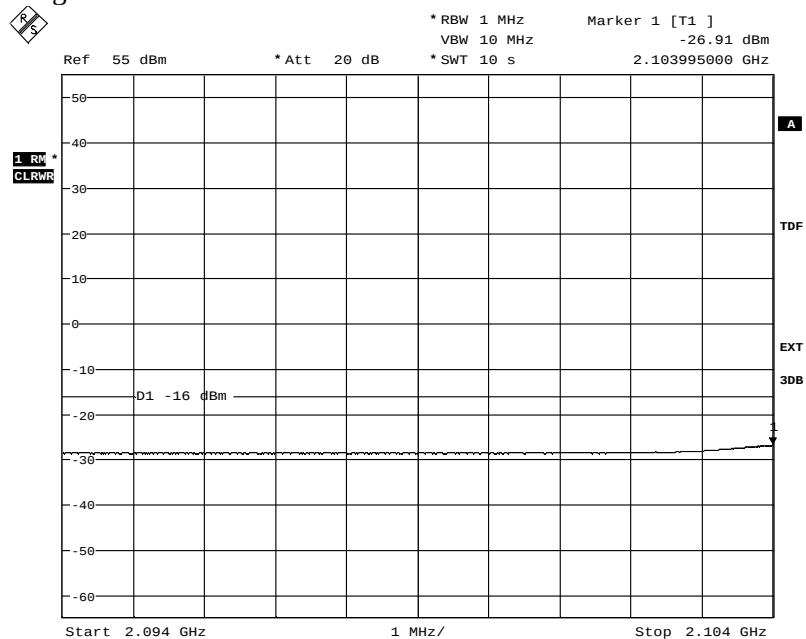


Date: 12.JUN.2012 08:38:16

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 6 a

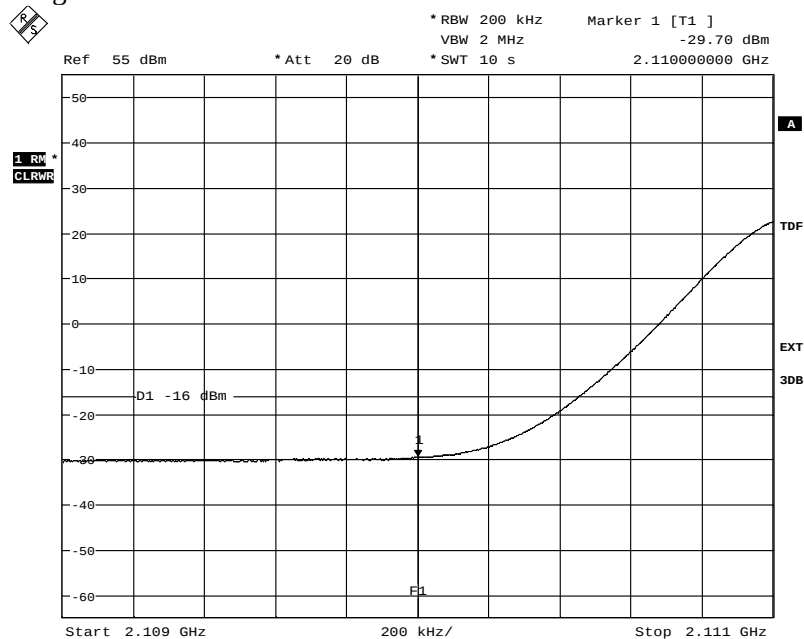

Date: 11.JUN.2012 16:12:30

Diagram 6 b

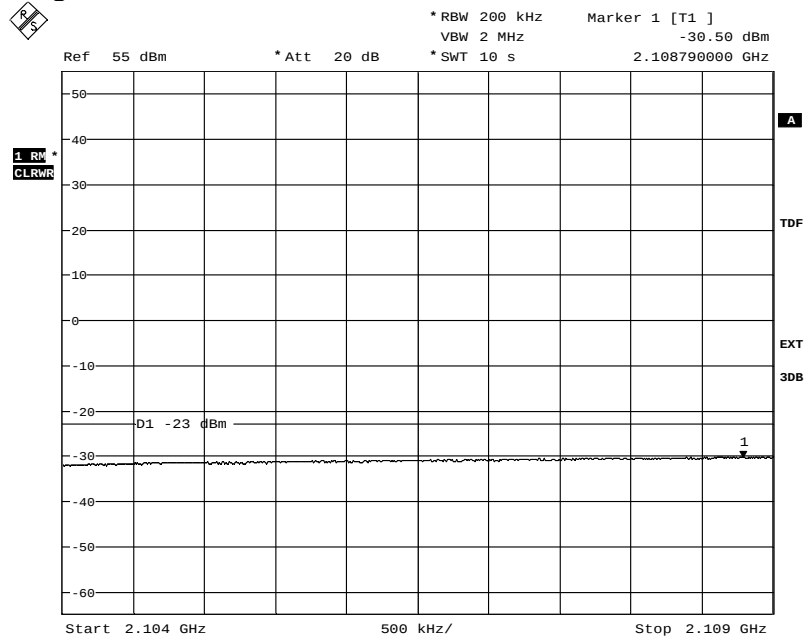


Date: 11.JUN.2012 16:14:17

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 6 c

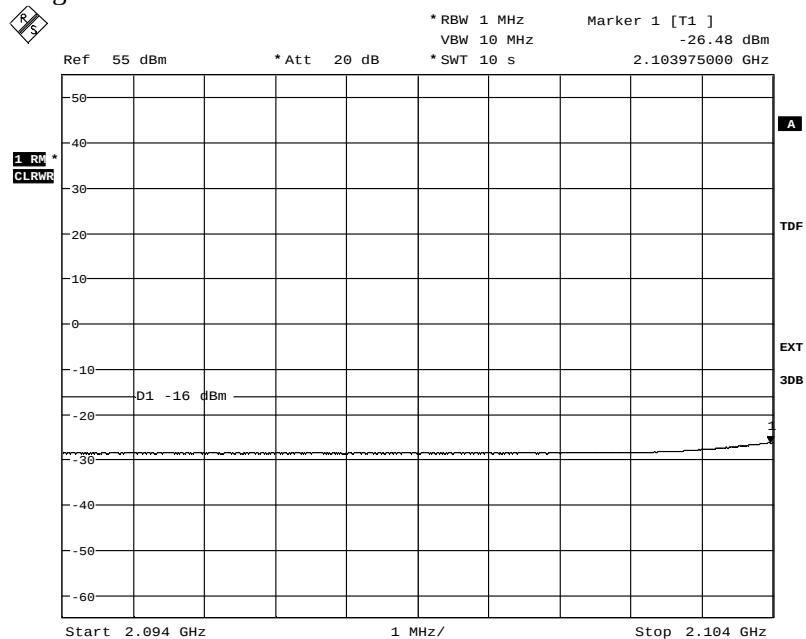


Date: 11.JUN.2012 16:43:38

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 7 a

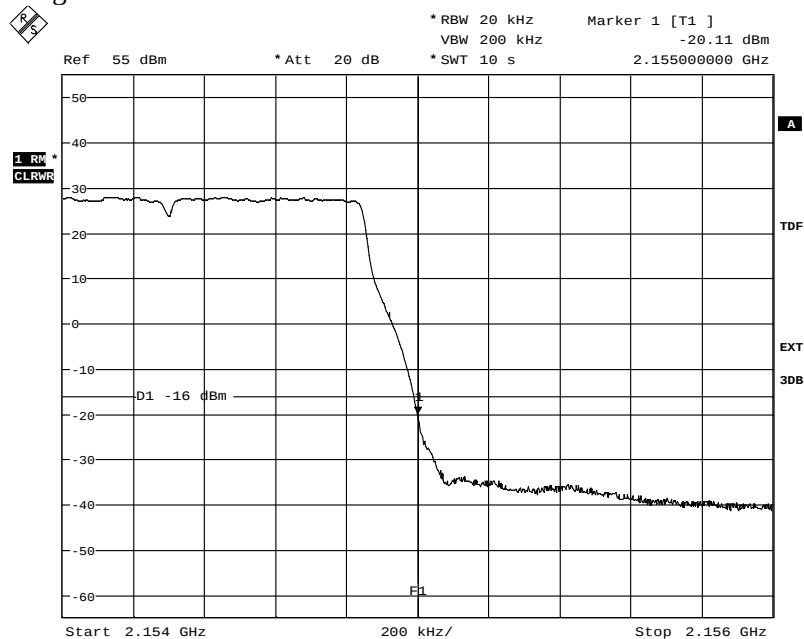

Date: 11.JUN.2012 19:24:08

Diagram 7 b

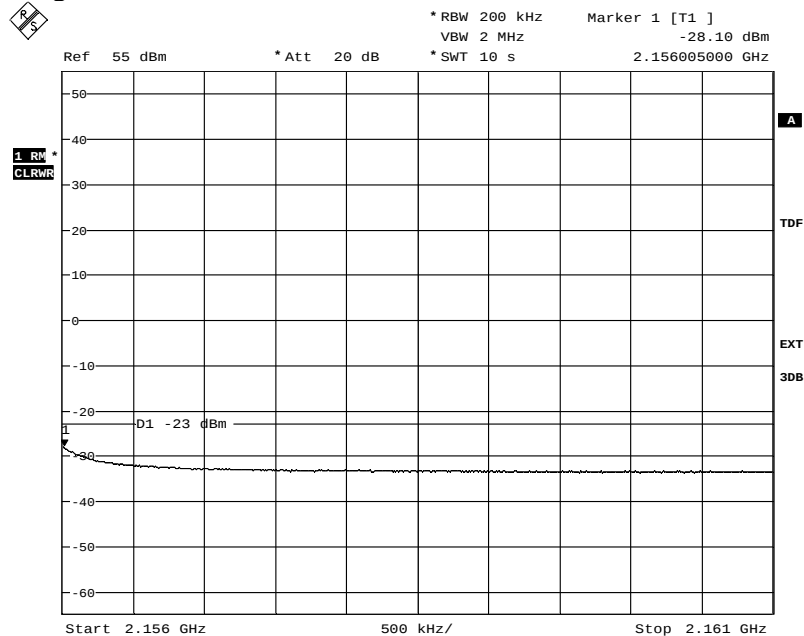


Date: 11.JUN.2012 19:25:45

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 7 c

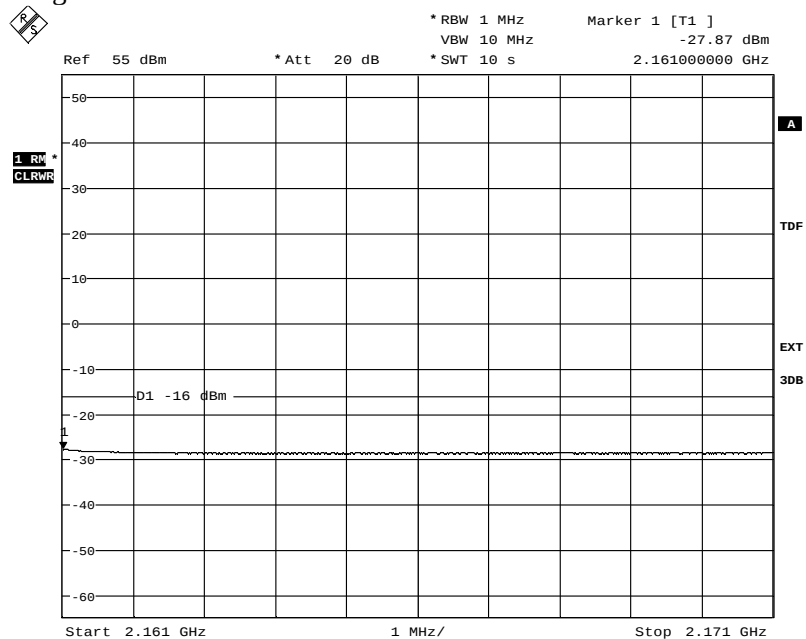


Date: 11.JUN.2012 19:30:08

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 8 a

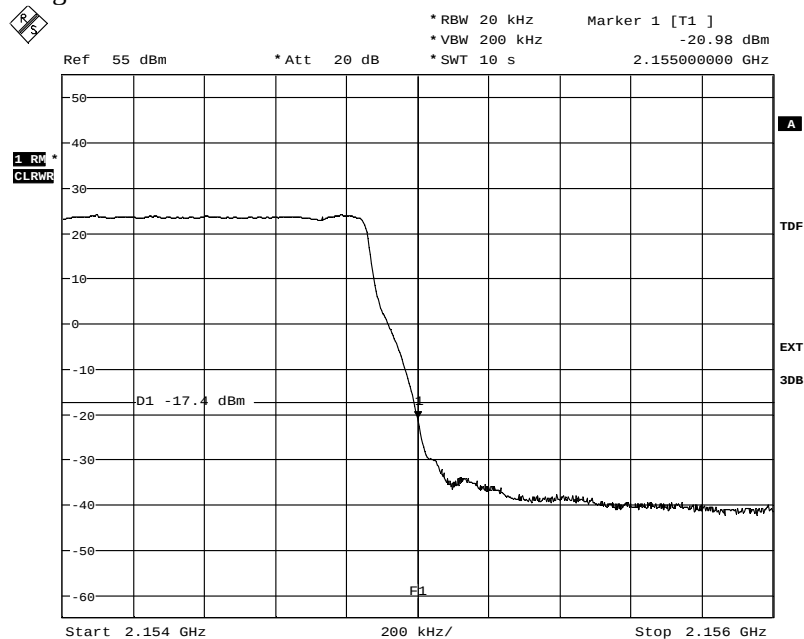

Date: 11.JUN.2012 20:02:22

Diagram 8 b

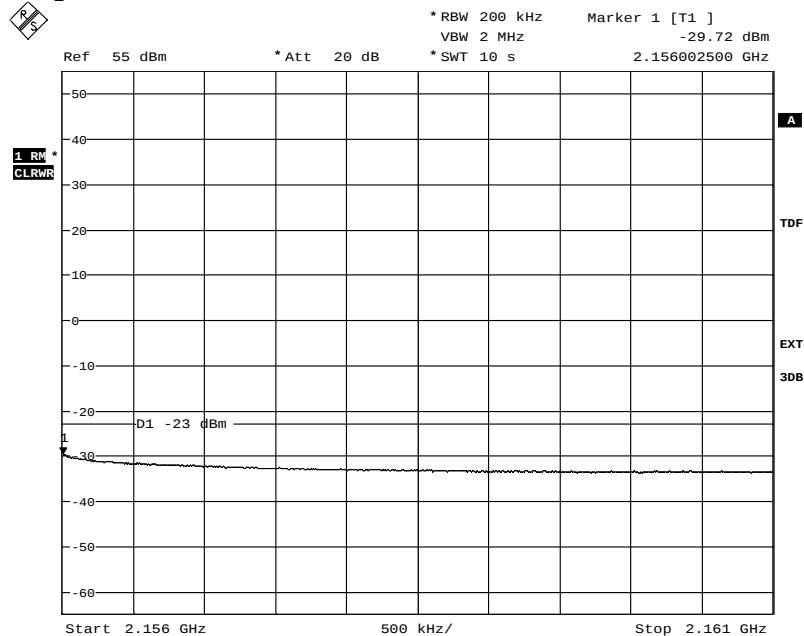


Date: 11.JUN.2012 20:02:54

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 8 c

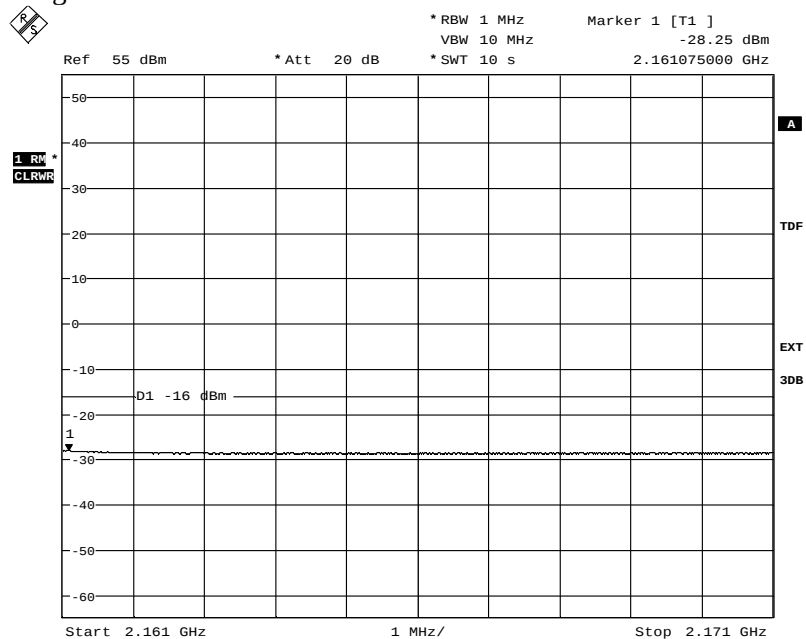


Date: 11.JUN.2012 20:03:35

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 9 a

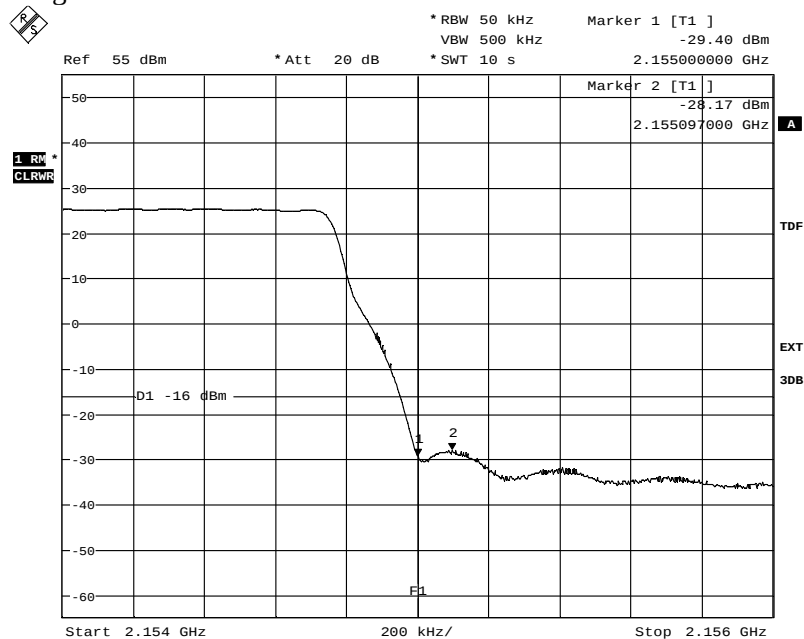

Date: 11.JUN.2012 20:09:16

Diagram 9 b

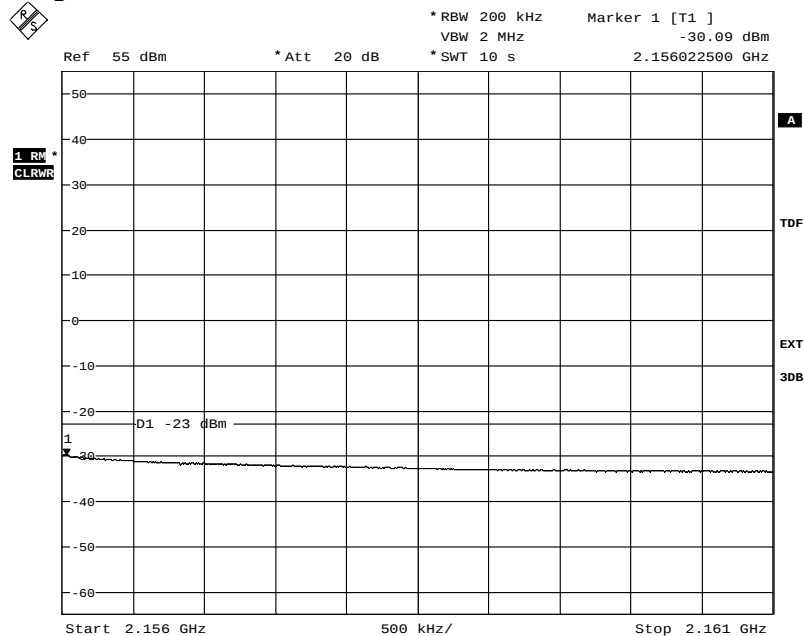


Date: 11.JUN.2012 20:09:58

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 9 c

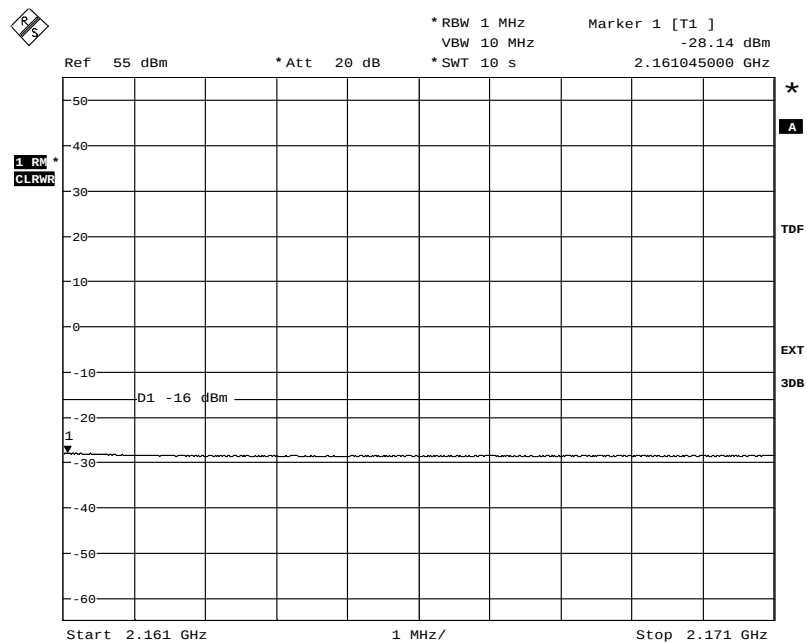


Date: 11.JUN.2012 20:10:35

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 10 a

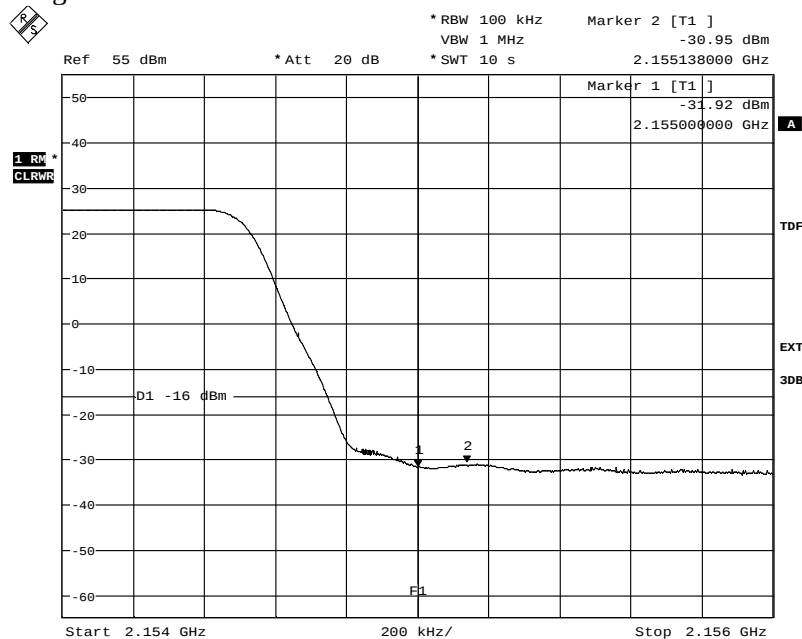

Date: 12.JUN.2012 08:27:12

Diagram 10 b

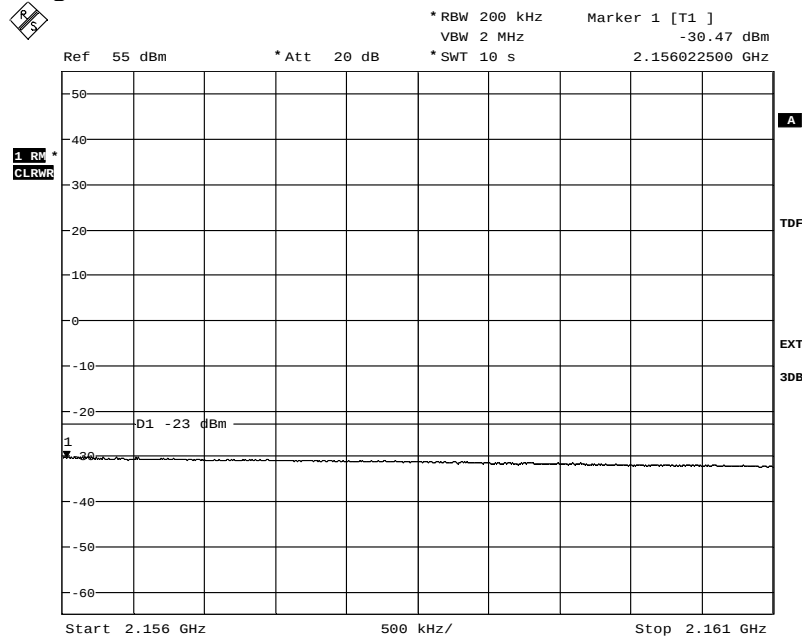


Date: 12.JUN.2012 08:27:49

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 10 c

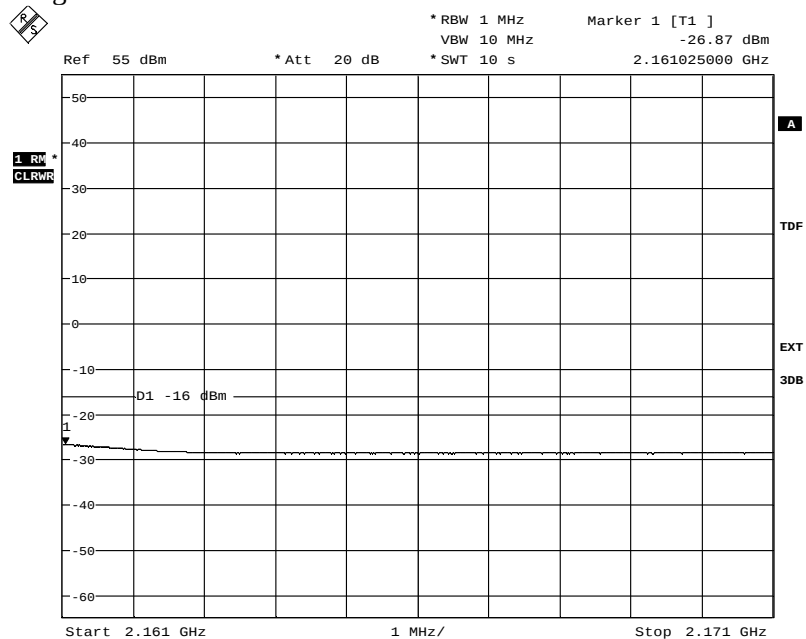


Date: 12.JUN.2012 08:28:31

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 11 a

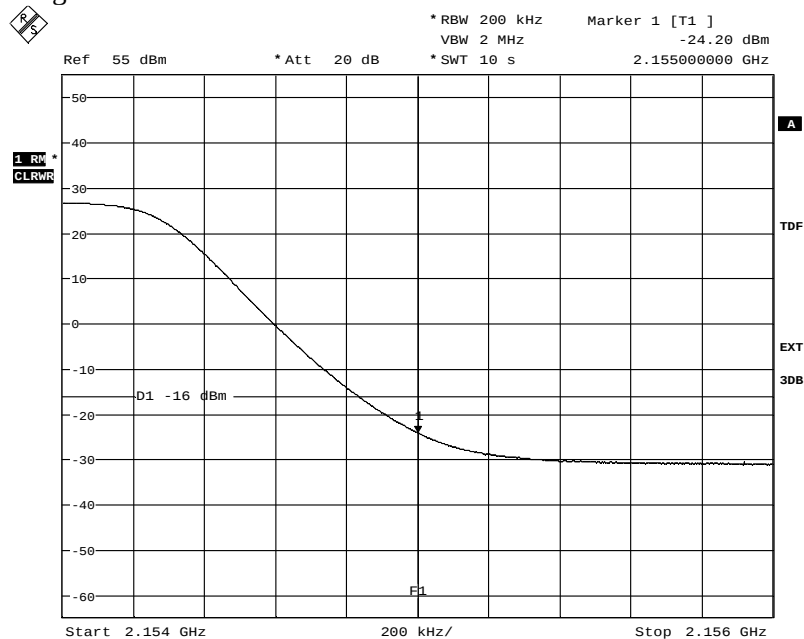

Date: 12.JUN.2012 08:49:52

Diagram 11 b

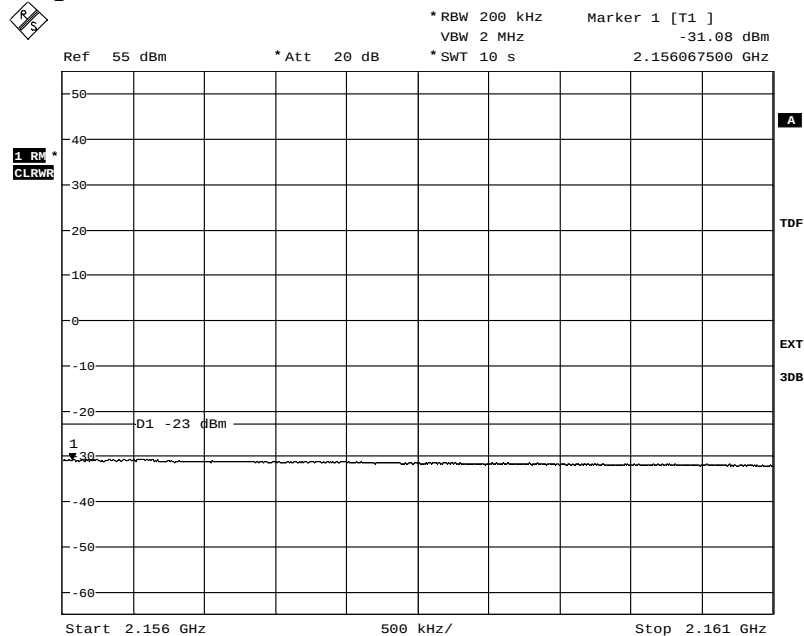


Date: 12.JUN.2012 08:50:31

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 11 c

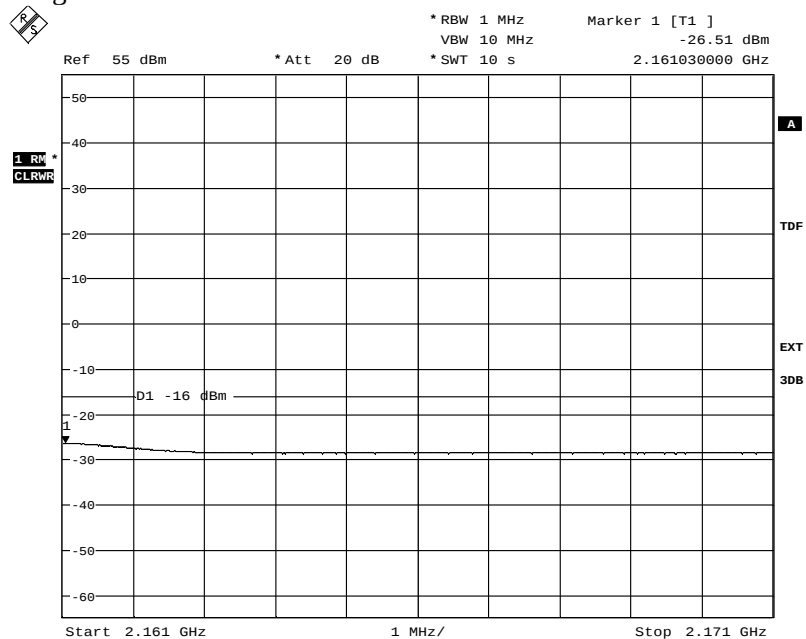


Date: 12.JUN.2012 08:51:09

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 12 a

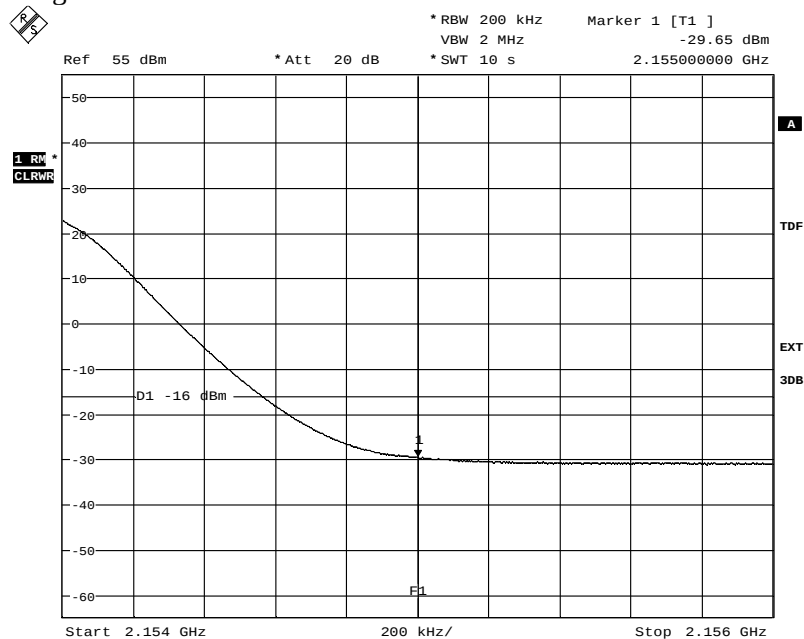

Date: 11.JUN.2012 13:46:42

Diagram 12 b

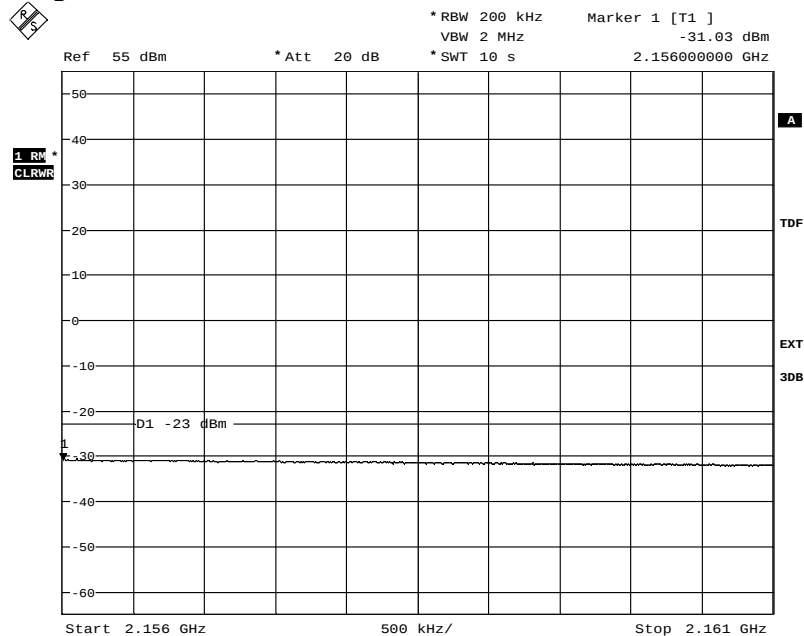


Date: 11.JUN.2012 13:49:31

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 12 c

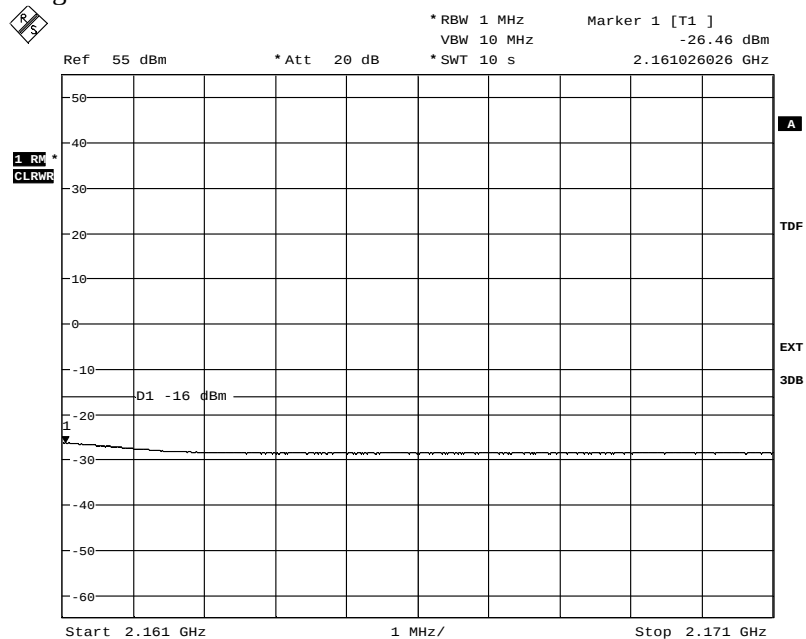


Date: 11.JUN.2012 13:53:23

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 13 a

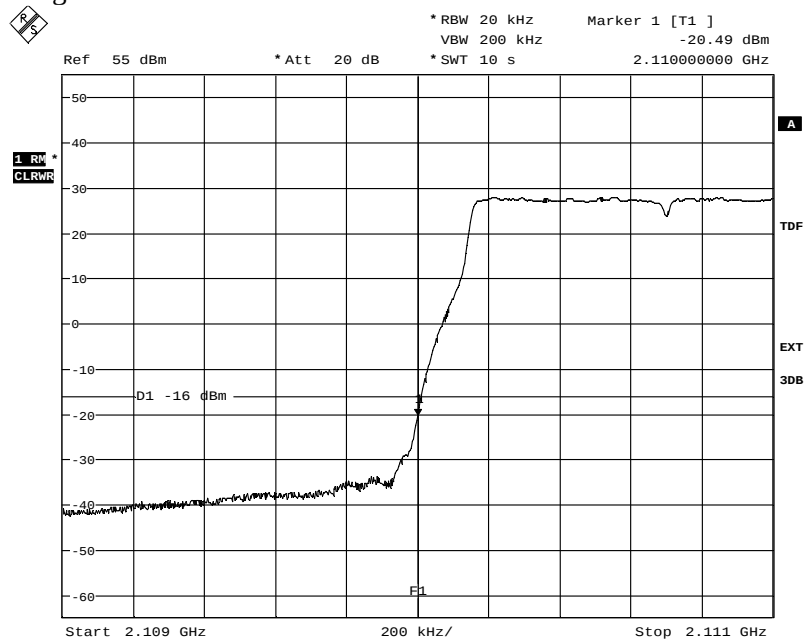

Date: 12.JUN.2012 11:40:33

Diagram 13 b

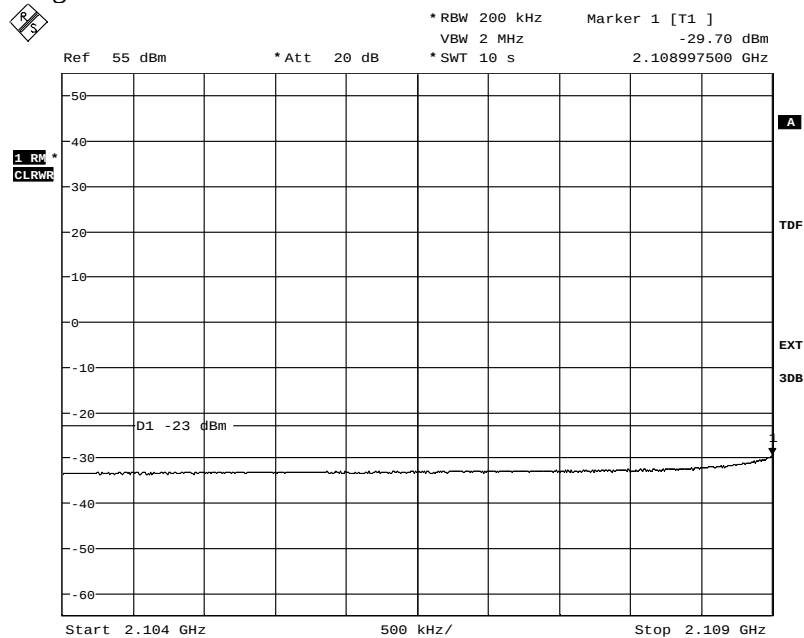


Date: 12.JUN.2012 11:42:21

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 13 c

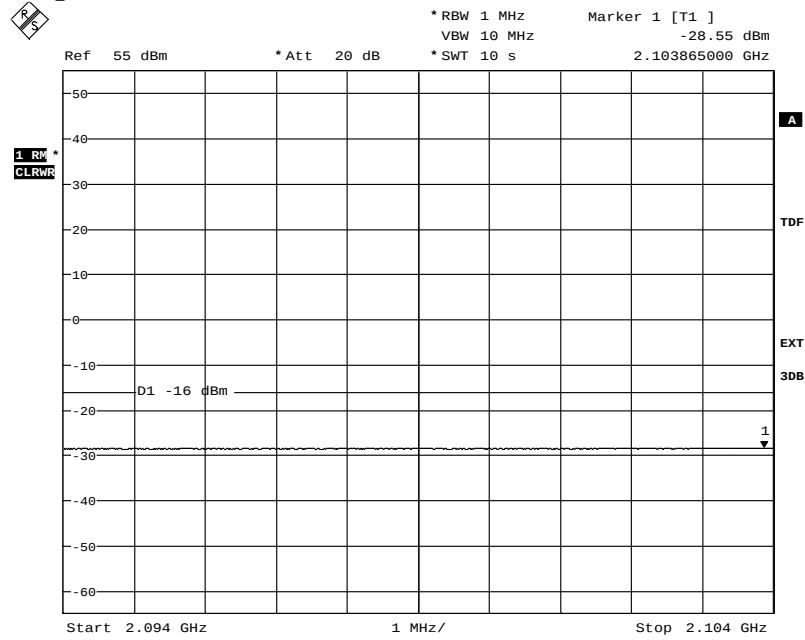


Date: 12.JUN.2012 11:44:05

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 4

Diagram 14 a

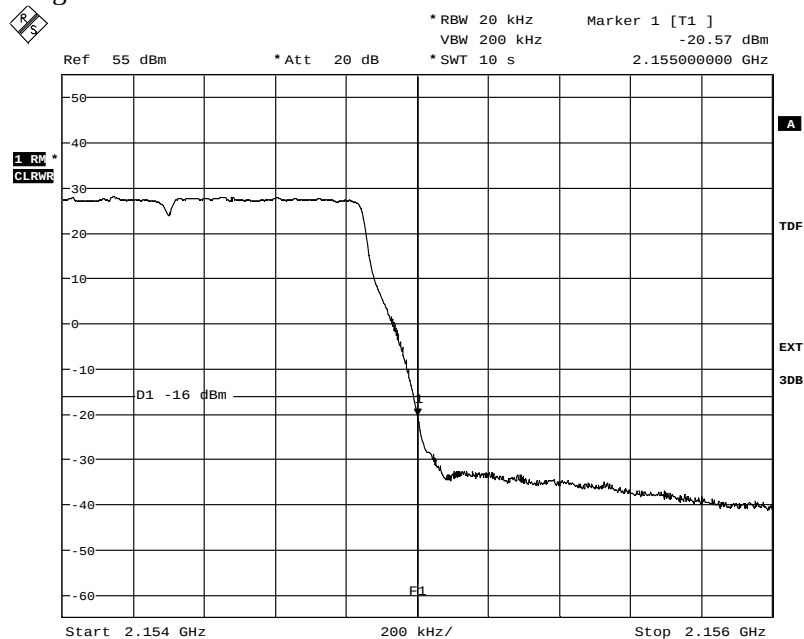

Date: 12.JUN.2012 11:49:30

Diagram 14 b

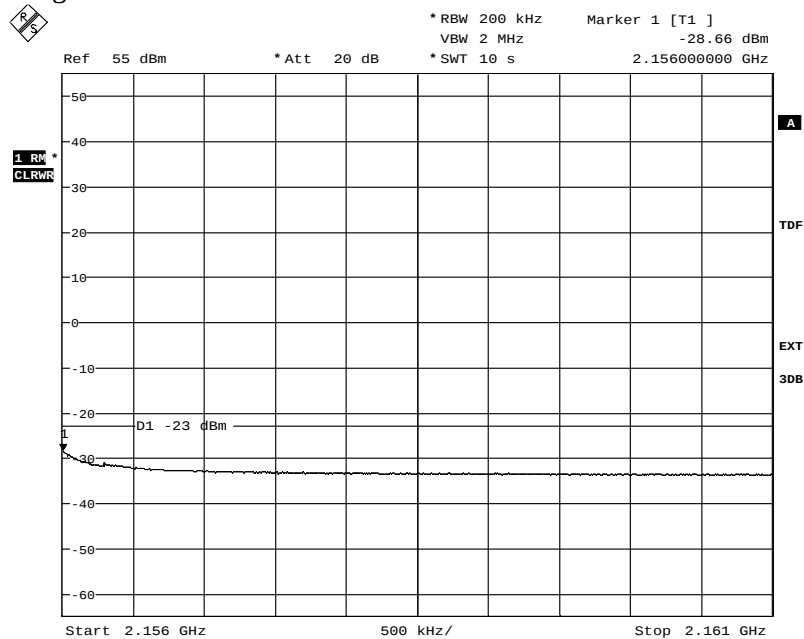


Date: 12.JUN.2012 11:50:06

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 4

Diagram 14 c

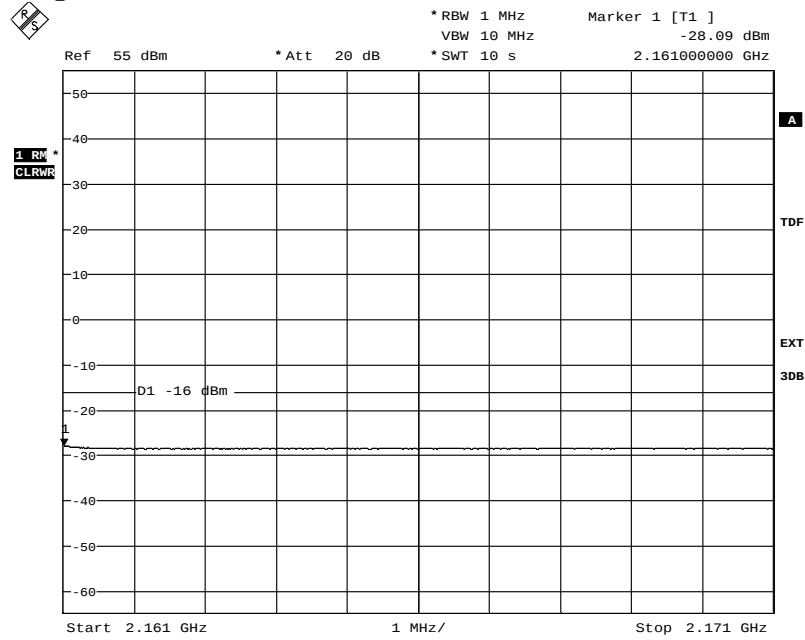

Date: 12.JUN.2012 11:50:44

Conducted spurious emission measurements according to CFR 47 §27.53(h) / IC RSS-139 6.5

Date	Temperature	Humidity
2012-06-11	22 °C ± 3 °C	46 % ± 5 %
2012-06-12	22 °C ± 3 °C	39 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §27.53(h). The output was connected to a spectrum analyzer with a RBW setting of 1 MHz and RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. The limit was adjusted with 3 dB to -16 dBm to compensate for TX diversity according to FCC KDB662911 [10 log (N)].

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	504 159
High pass filter	504 200
RF attenuator	900 229
High pass filter	503 740
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Diagram	BW configuration / [MHz]	Tested frequency
1 a-d	1.4	B
2 a-d	20	B
3 a-d	1.4	M
4 a-d	3	M
5 a-d	5	M
6 a-d	10	M
7 a-d	15	M
8 a-d	20	M
9 a-d	1.4	T
10 a-d	20	T
11 a-d	1.4	M, RF B
12 a-d	20	M, RF B

The diagrams are shown in appendix 5.1

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 5

Remark

The emission at 9 kHz on some plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

The highest internal frequency as declared by the client was 2.4576 GHz, thus the choice of the upper frequency boundary was set to $10 \times 2.5 \text{ GHz} = 25 \text{ GHz}$ for emission measurements.

Limits

§27.53(h) and RSS-139 6.5


Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P) \text{ dB}$, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 1a:

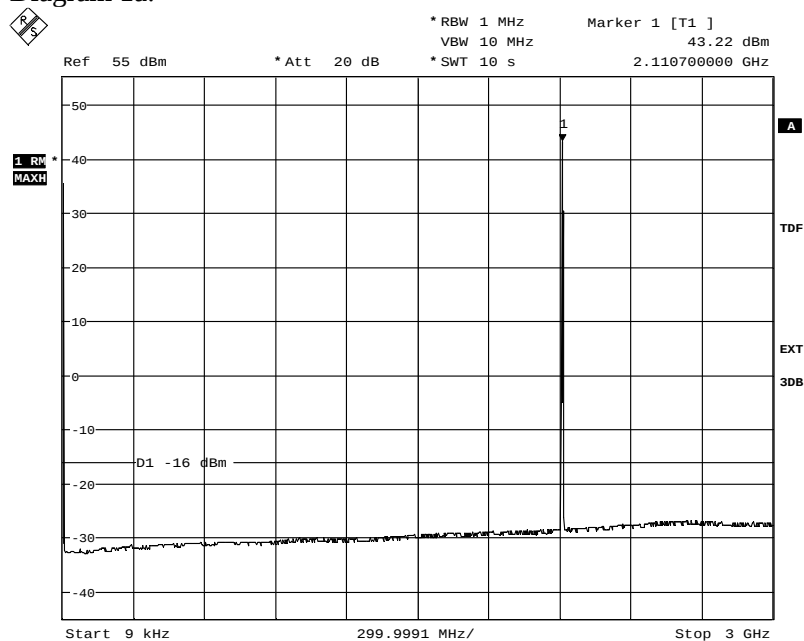

Date: 11.JUN.2012 18:58:57

Diagram 1b:

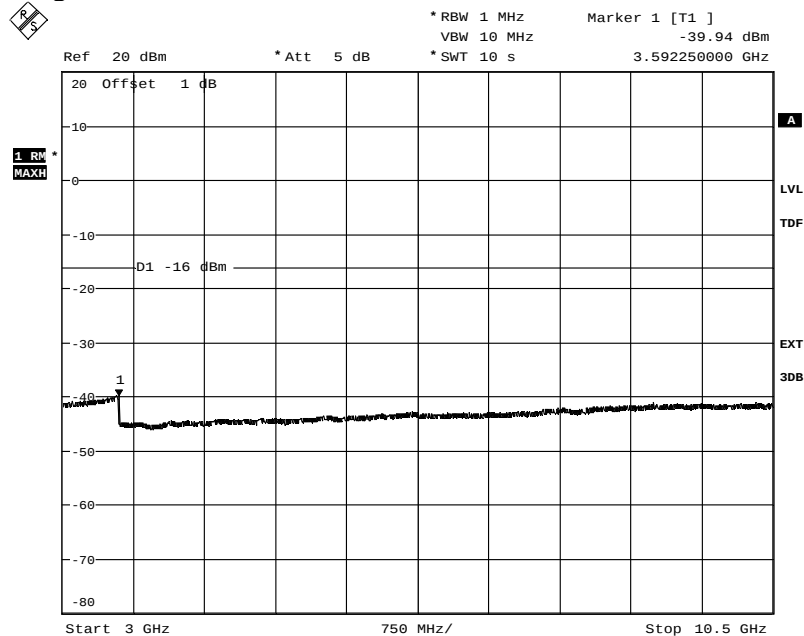


Date: 11.JUN.2012 19:00:54

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 1c:

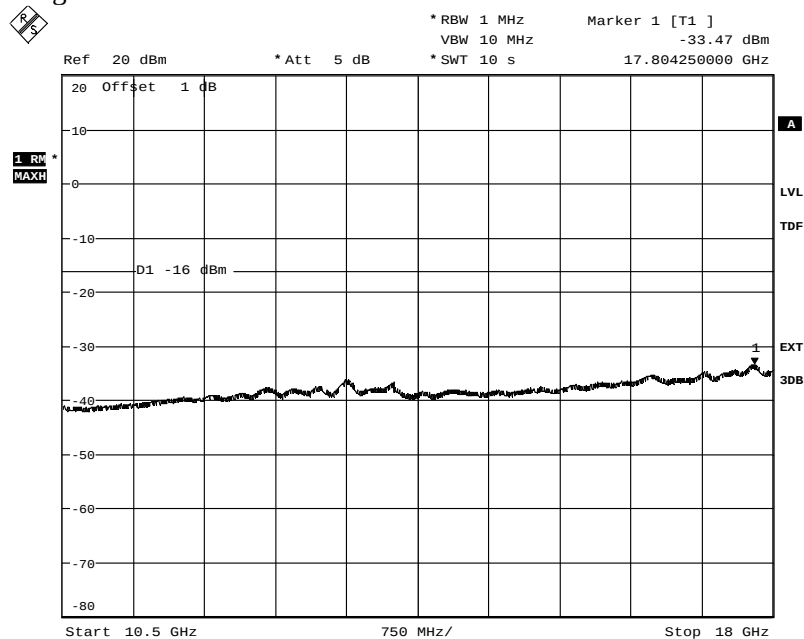

Date: 11.JUN.2012 19:02:07

Diagram 1d:

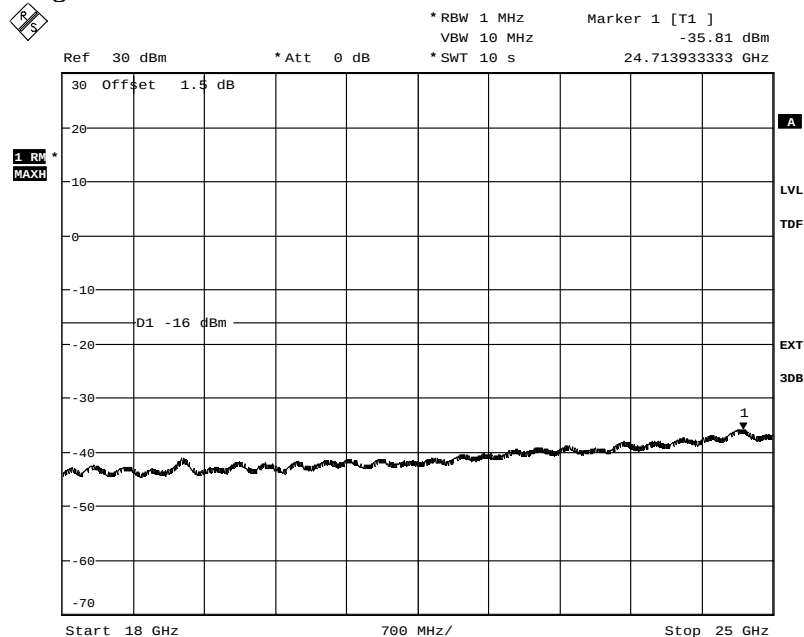


Date: 11.JUN.2012 19:36:40

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 2a:

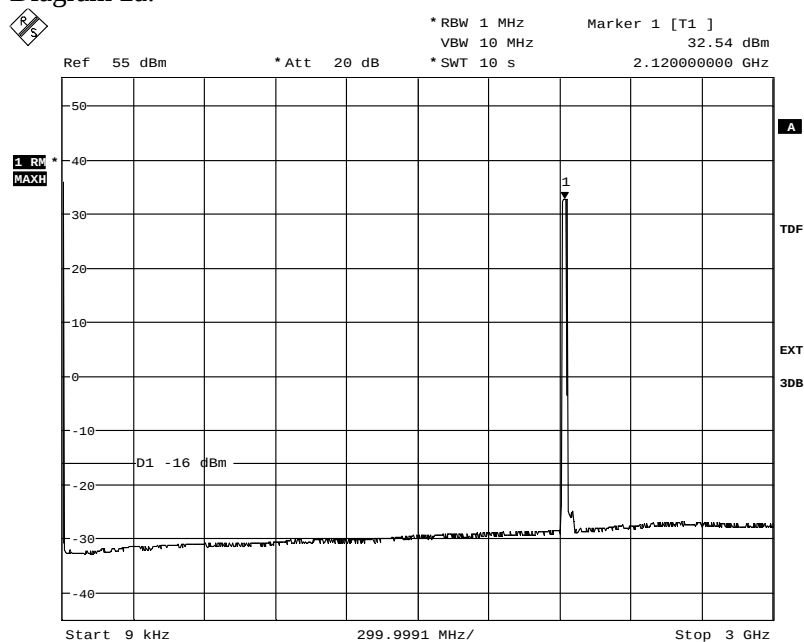

Date: 11.JUN.2012 14:17:12

Diagram 2b:

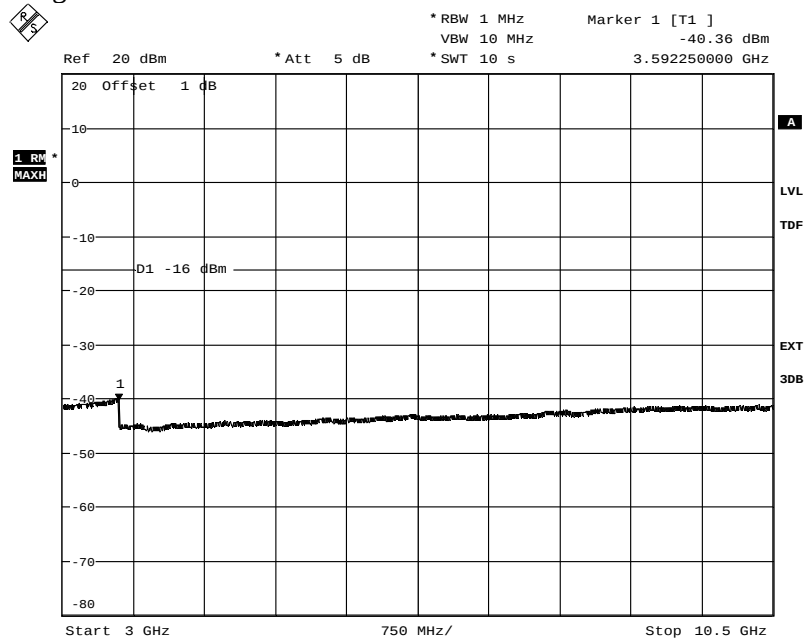


Date: 11.JUN.2012 14:20:45

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 2c:

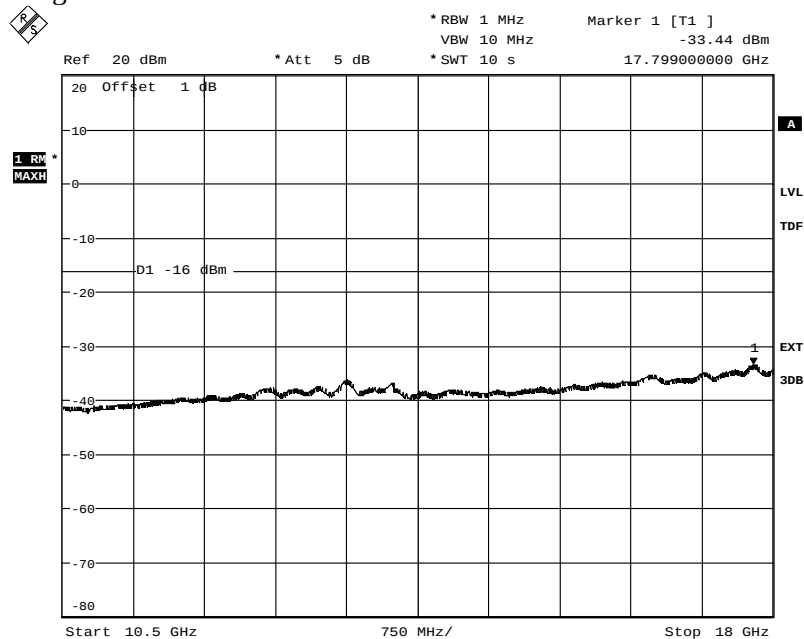

Date: 11.JUN.2012 14:23:33

Diagram 2d:

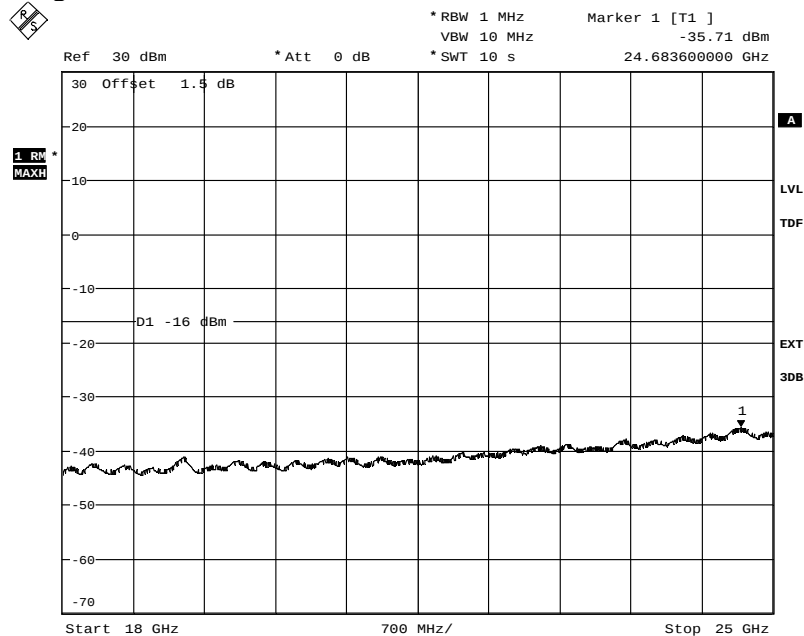


Date: 11.JUN.2012 16:21:45

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 3a:

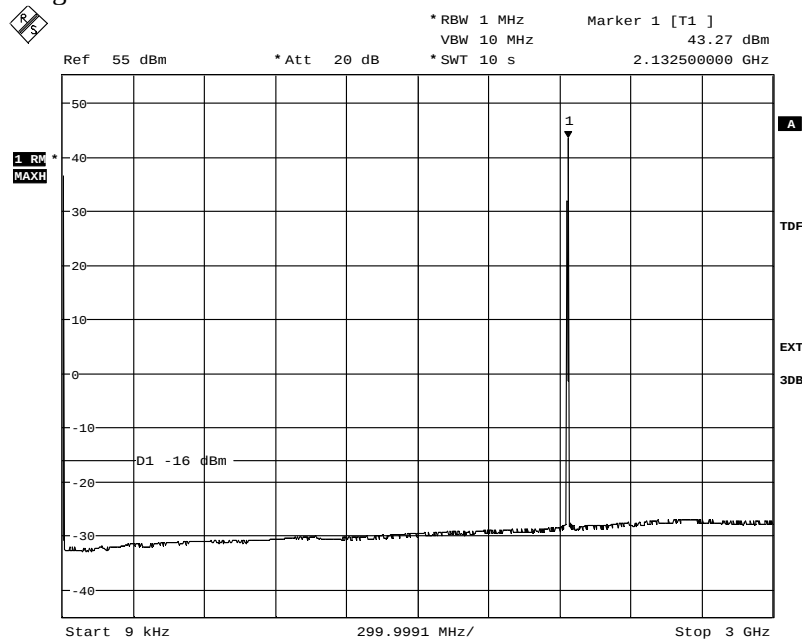

Date: 11.JUN.2012 12:01:43

Diagram 3b:

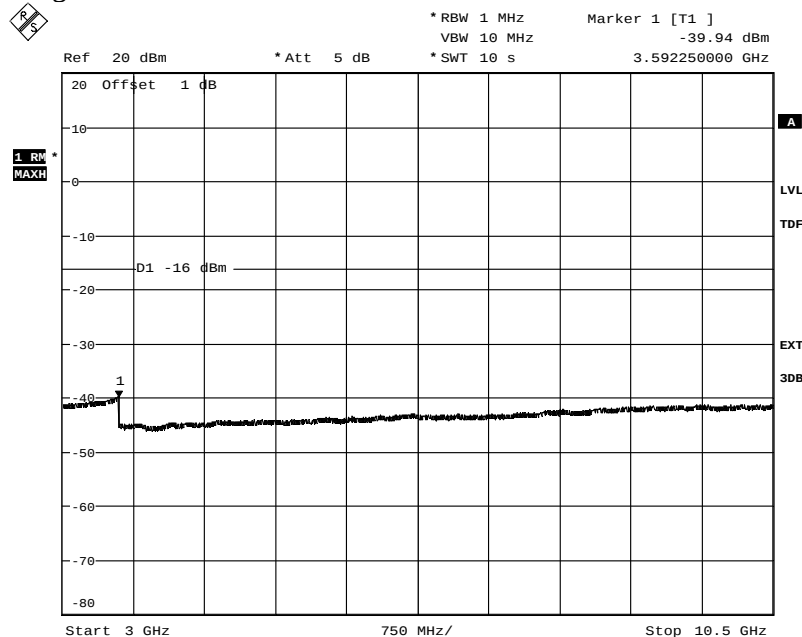


Date: 11.JUN.2012 12:03:40

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 3c:

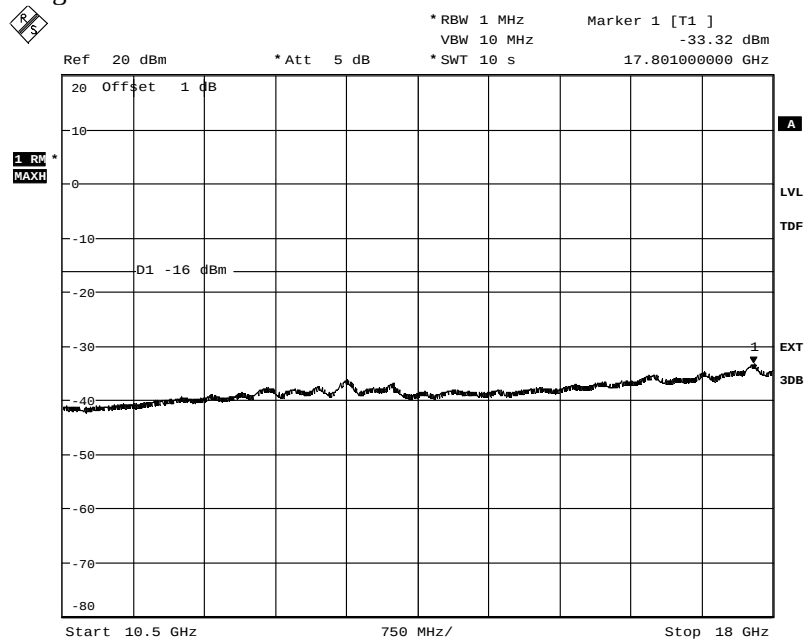

Date: 11.JUN.2012 12:05:08

Diagram 3d:

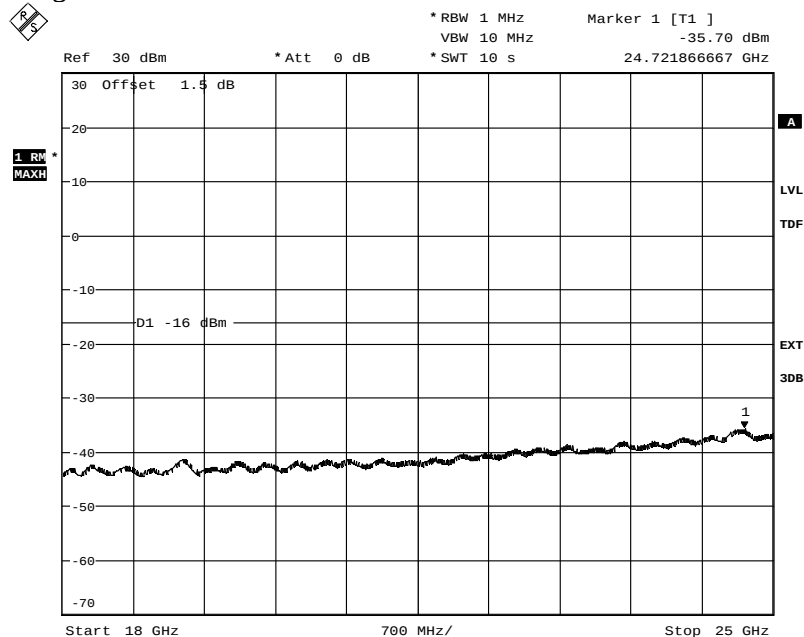


Date: 11.JUN.2012 12:07:38

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 4a:

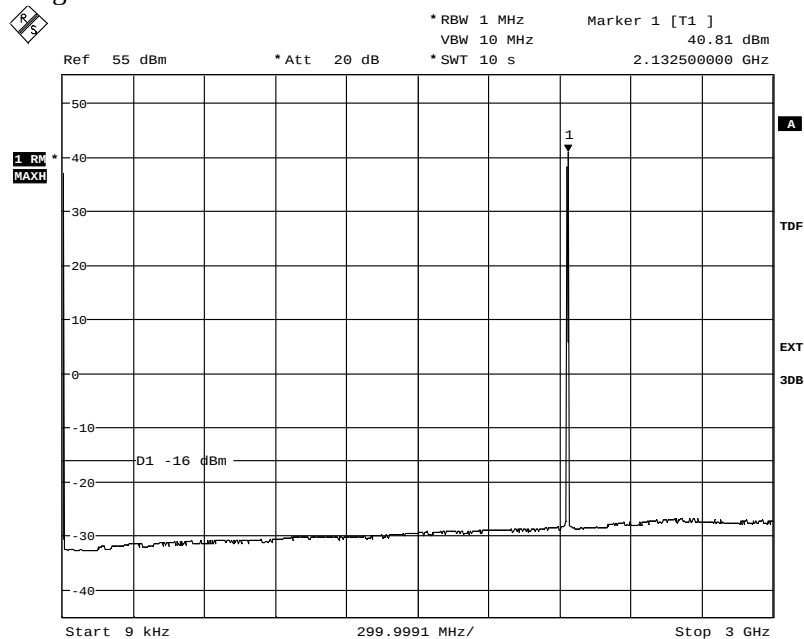

Date: 11.JUN.2012 11:00:32

Diagram 4b:

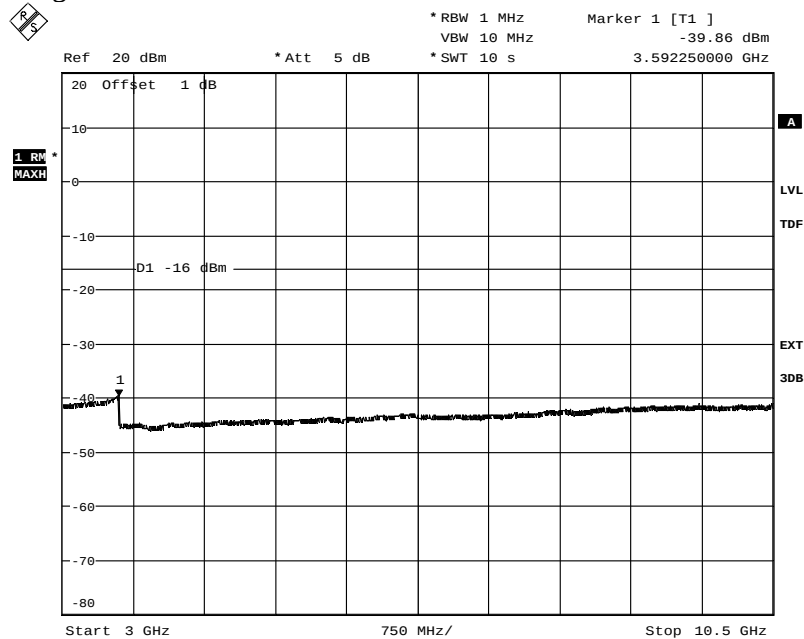


Date: 11.JUN.2012 11:02:14

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 4c:

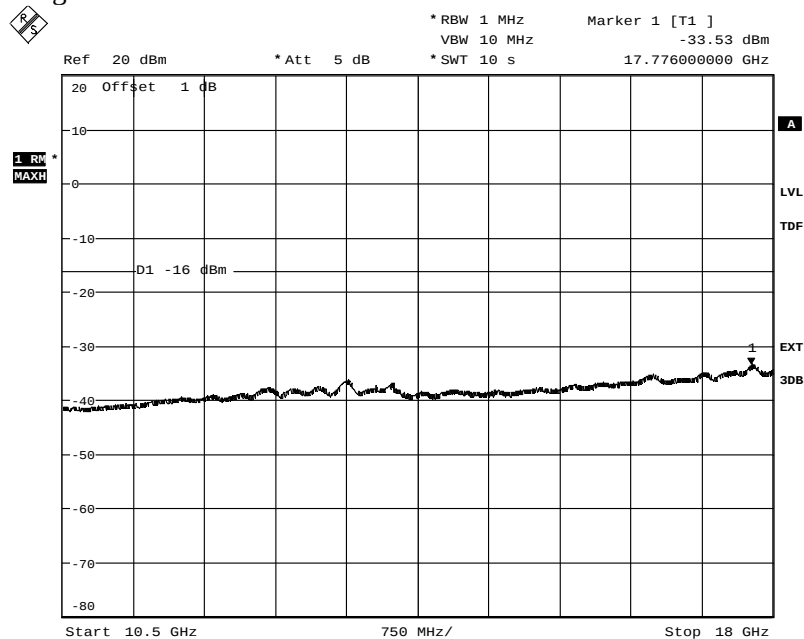

Date: 11.JUN.2012 11:03:38

Diagram 4d:

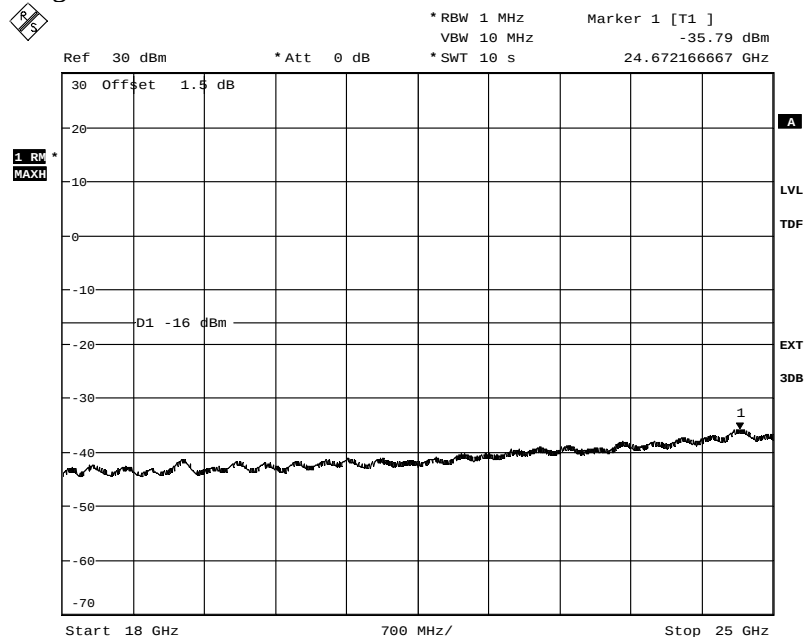


Date: 11.JUN.2012 11:05:53

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 5a:

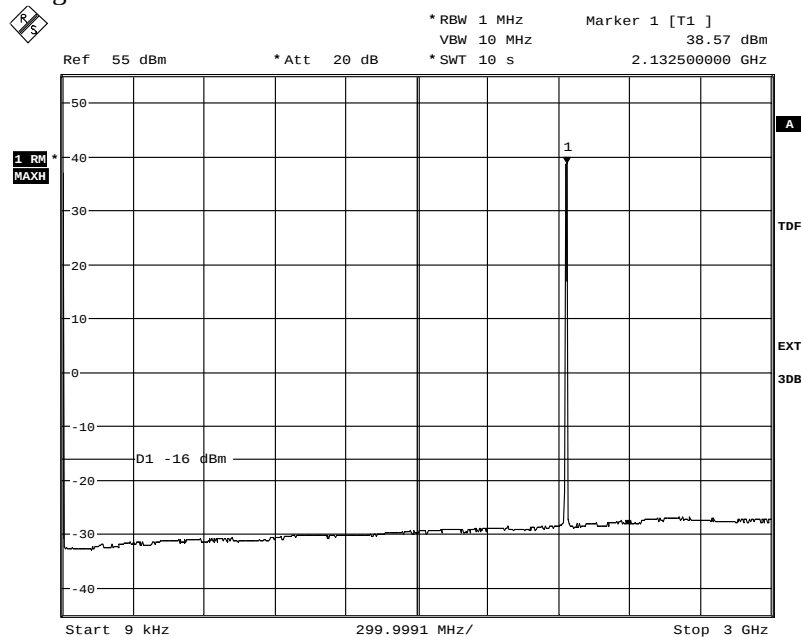

Date: 11.JUN.2012 10:32:51

Diagram 5b:

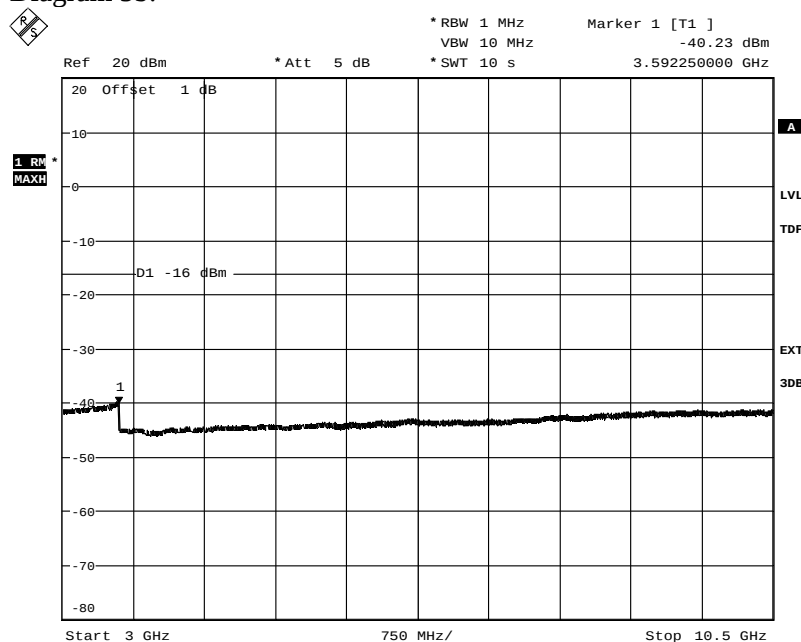


Date: 11.JUN.2012 10:41:20

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 5c:

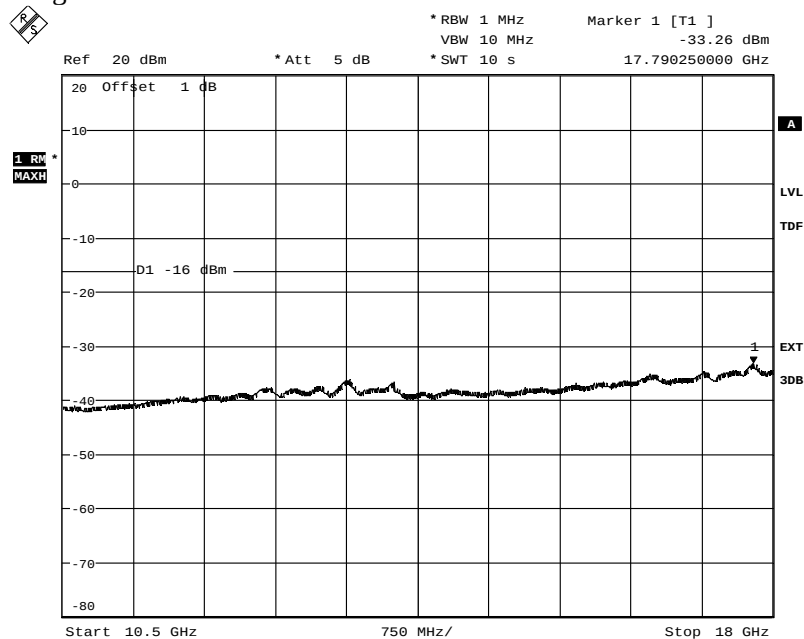

Date: 11.JUN.2012 10:43:01

Diagram 5d:

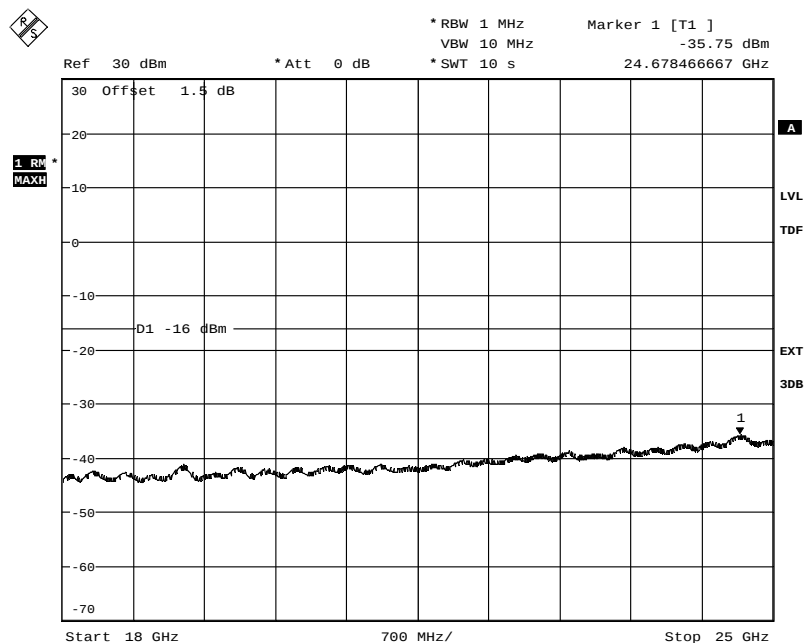


Date: 11.JUN.2012 10:46:16

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 6a:

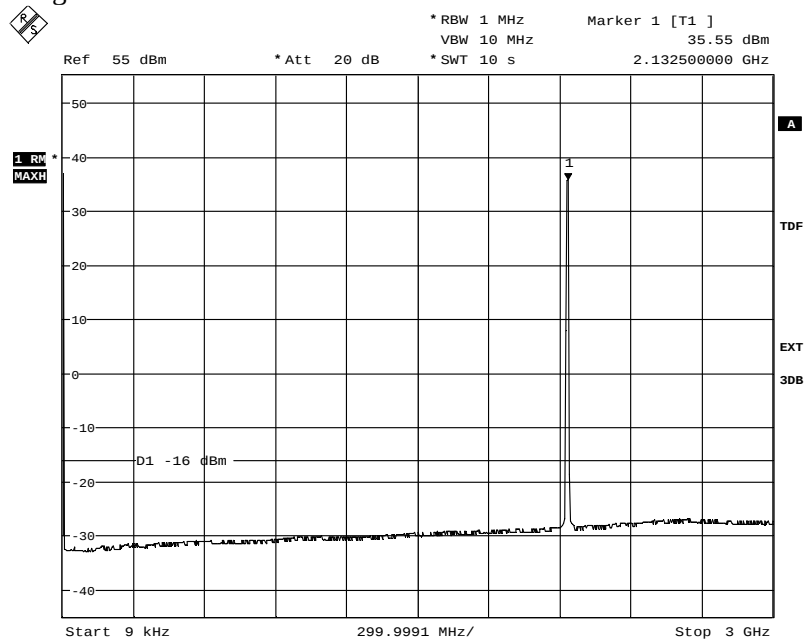

Date: 11.JUN.2012 12:16:56

Diagram 6b:

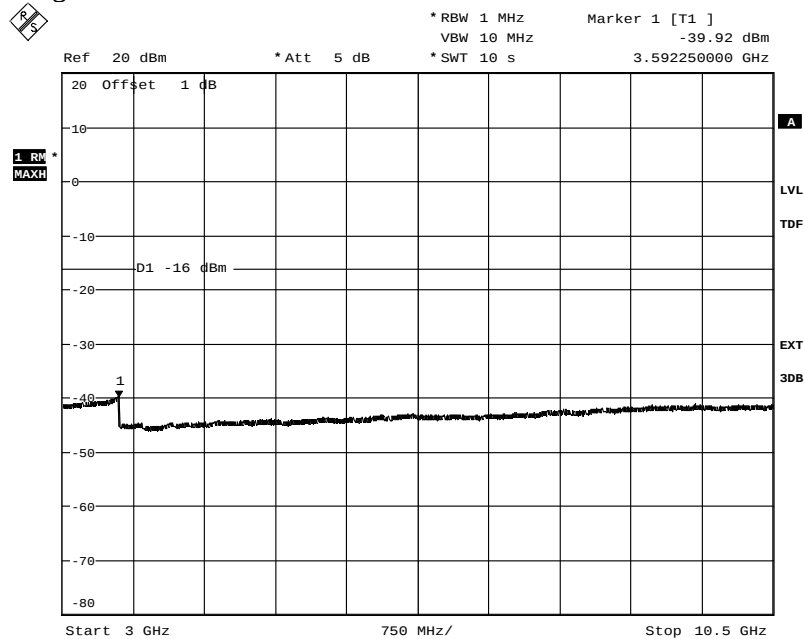


Date: 11.JUN.2012 12:18:38

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 6c:

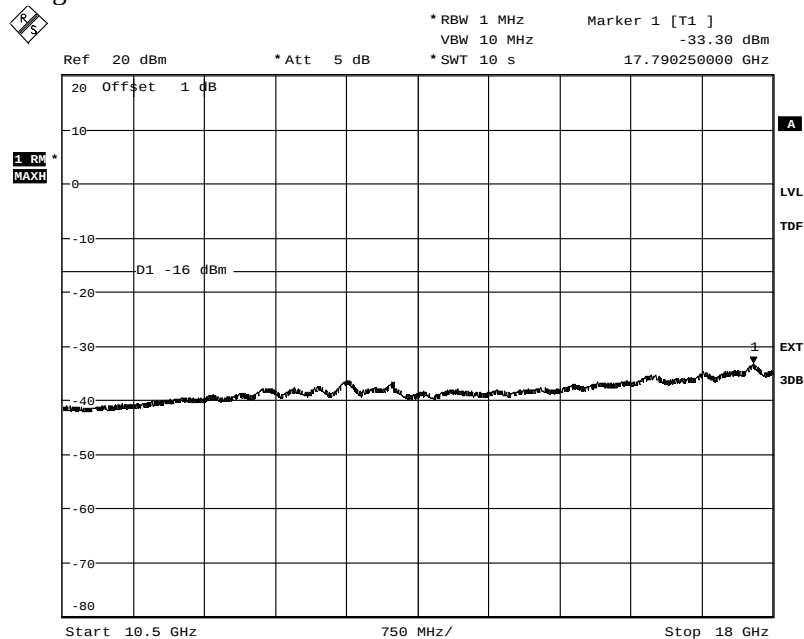

Date: 11.JUN.2012 12:19:42

Diagram 6d:

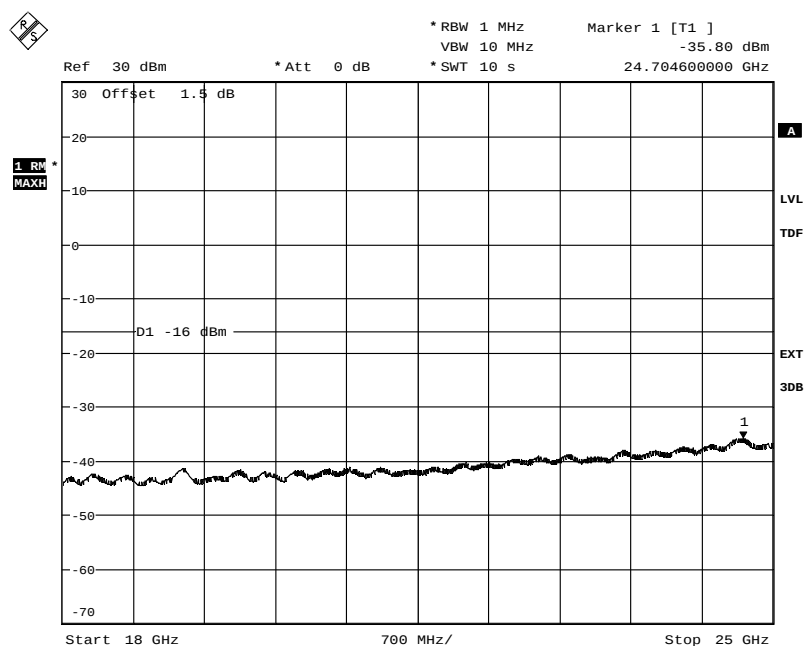


Date: 11.JUN.2012 12:21:50

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 7a:

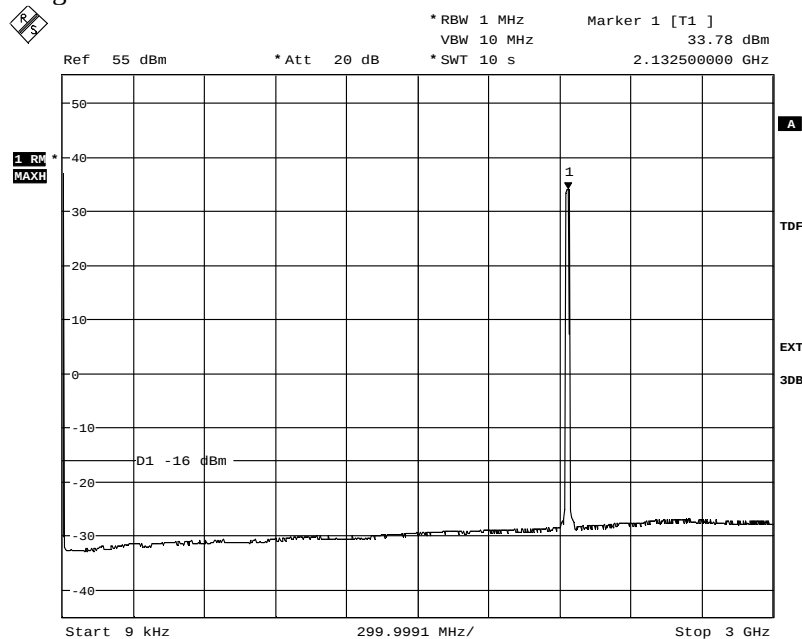

Date: 11.JUN.2012 12:31:51

Diagram 7b:

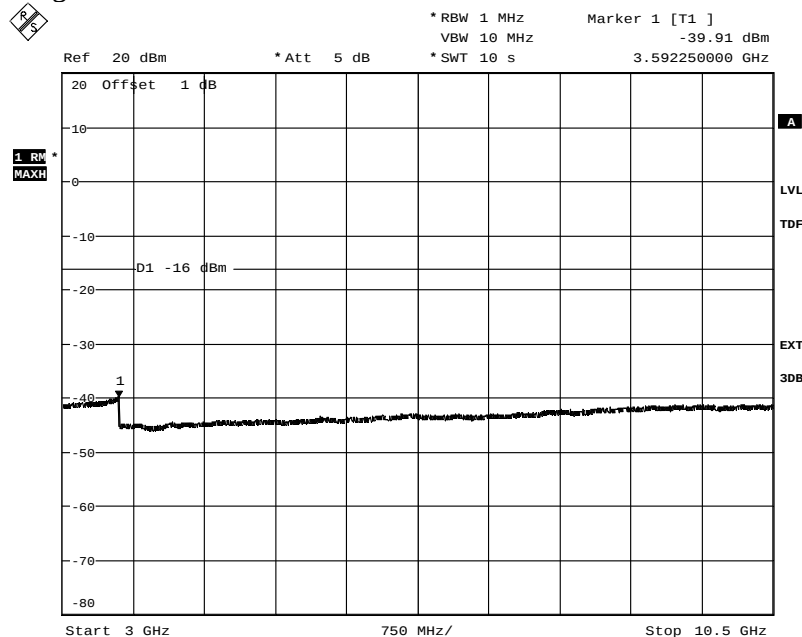


Date: 11.JUN.2012 12:33:37

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 7c:

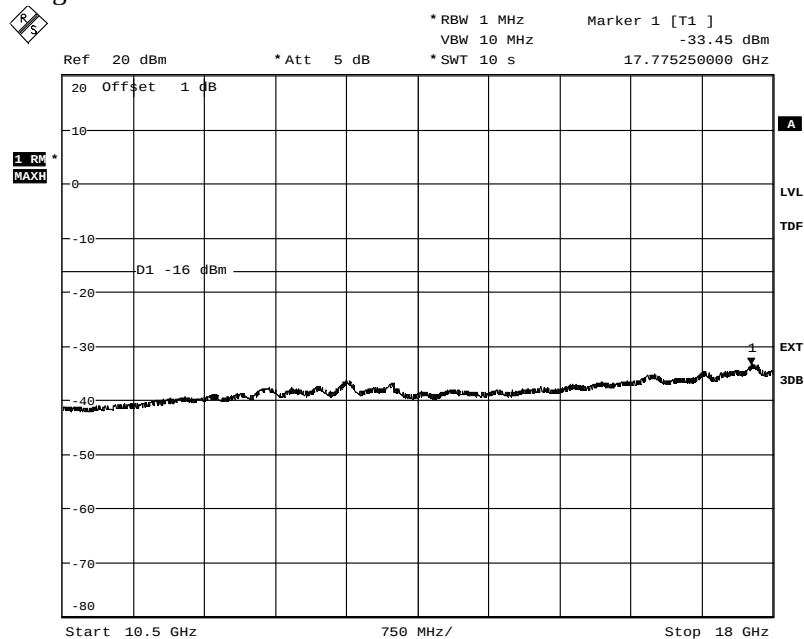

Date: 11.JUN.2012 12:34:36

Diagram 7d:

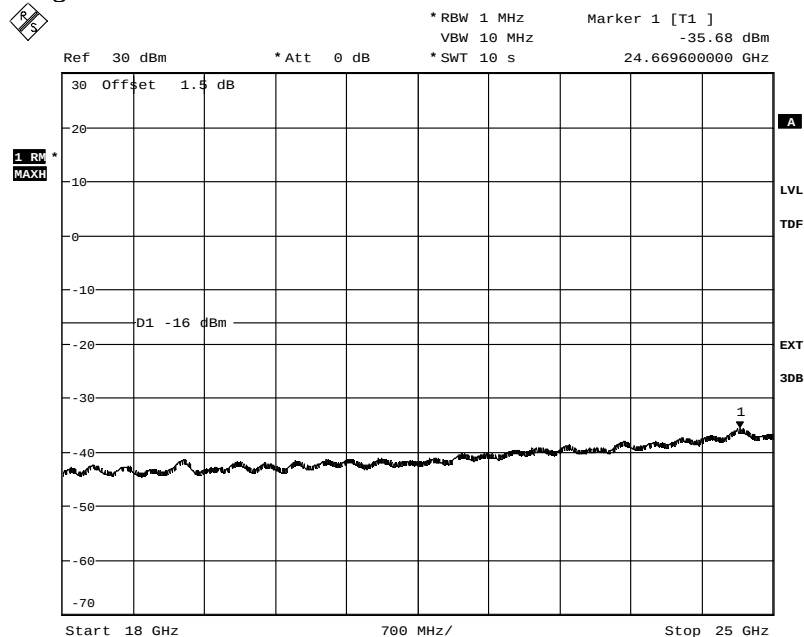


Date: 11.JUN.2012 12:25:16

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 8a:

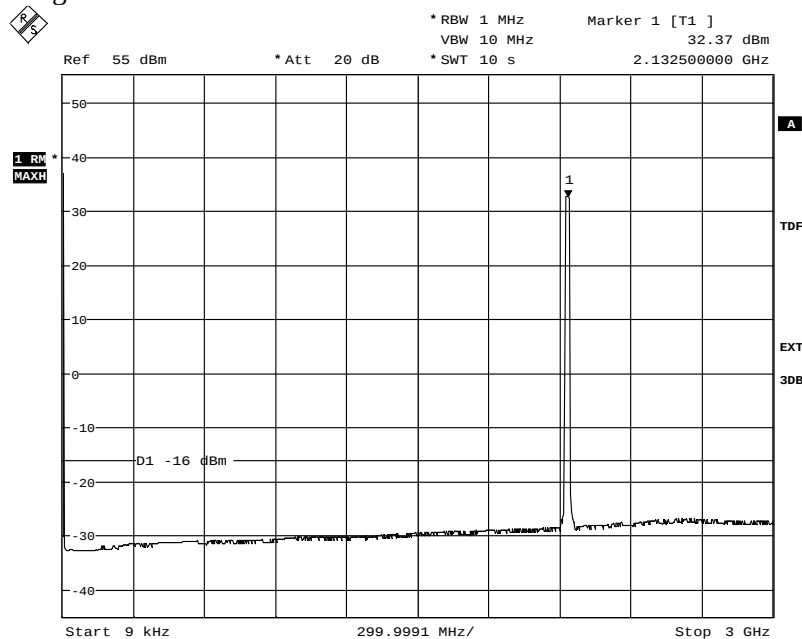

Date: 11.JUN.2012 12:41:48

Diagram 8b:

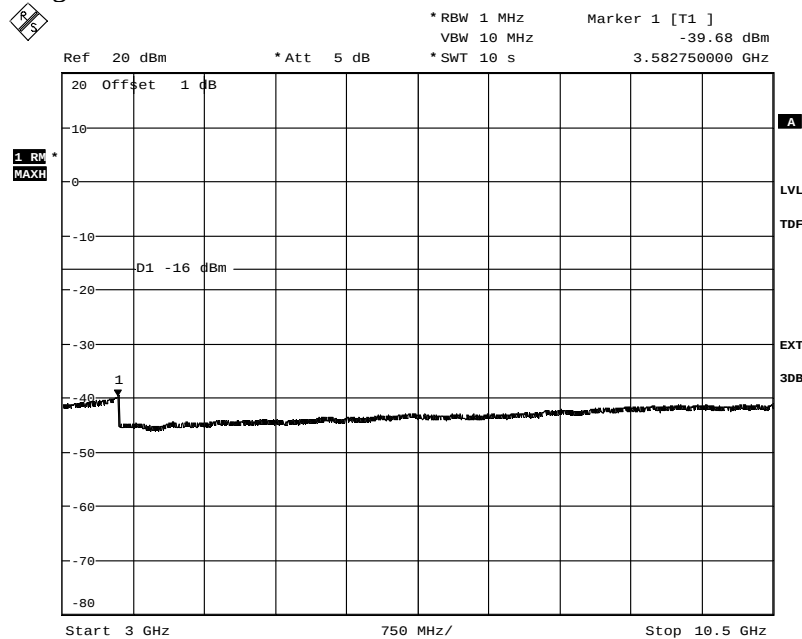


Date: 11.JUN.2012 12:40:25

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 8c:

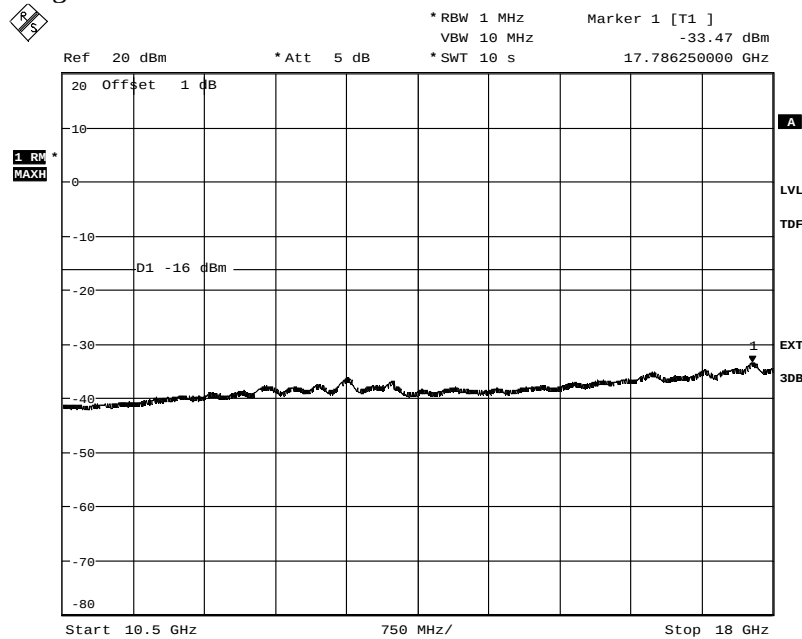

Date: 11.JUN.2012 12:39:33

Diagram 8d:

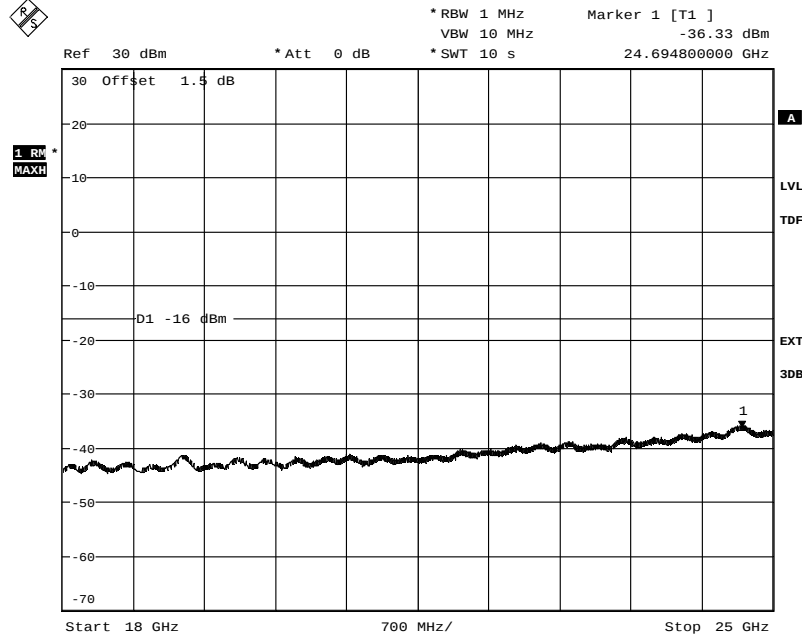


Date: 11.JUN.2012 12:49:25

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 9a:

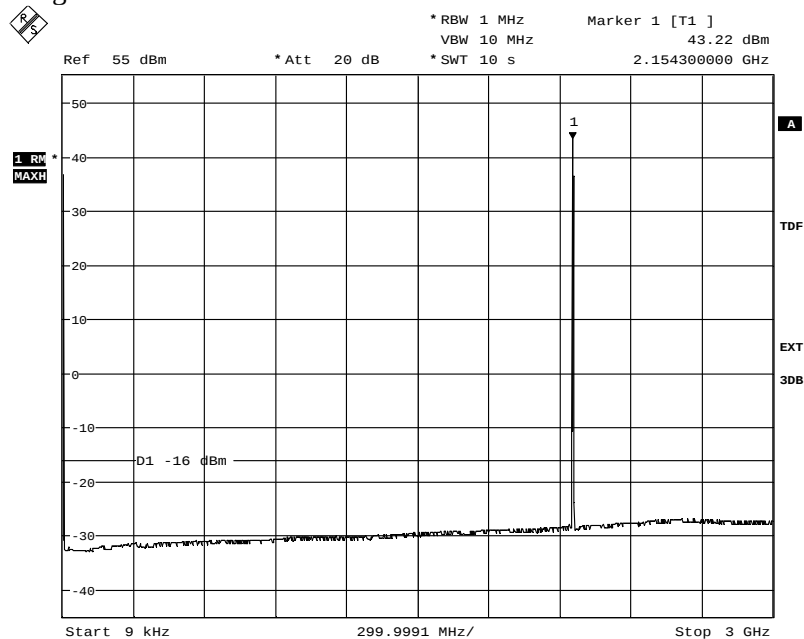

Date: 11.JUN.2012 19:12:01

Diagram 9b:

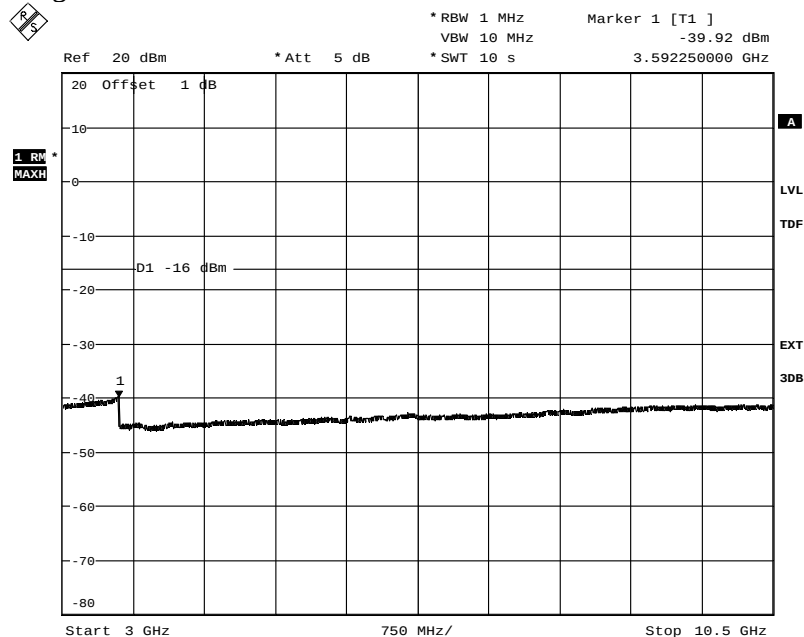


Date: 11.JUN.2012 19:10:08

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 9c:

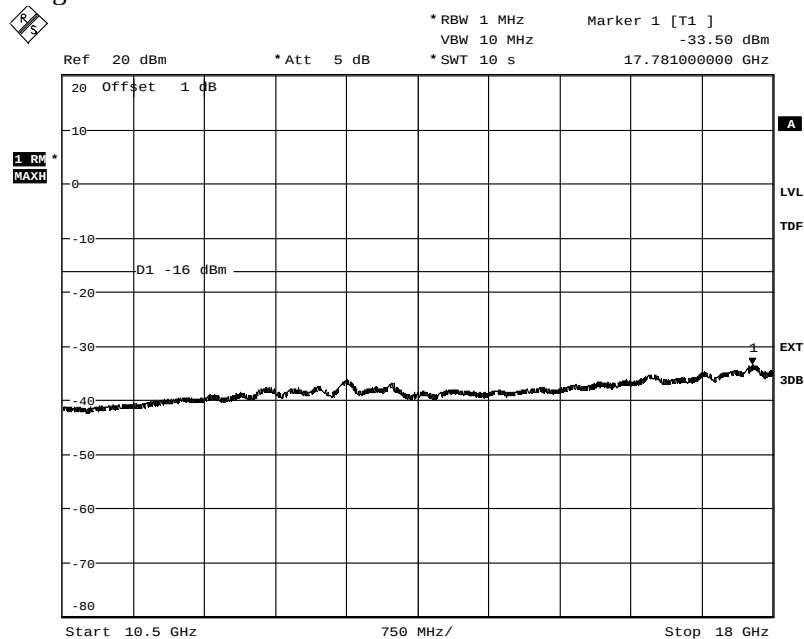

Date: 11.JUN.2012 19:08:52

Diagram 9d:

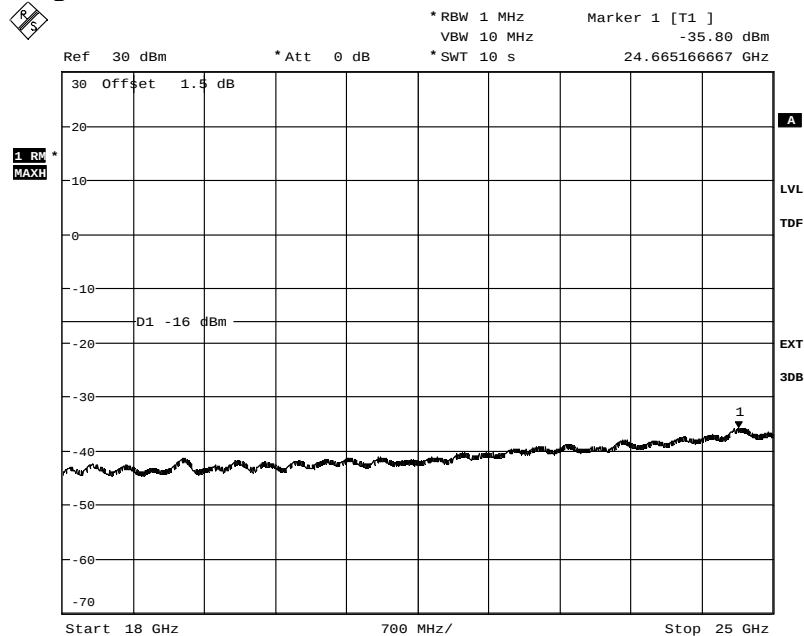


Date: 11.JUN.2012 19:33:06

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 10a:

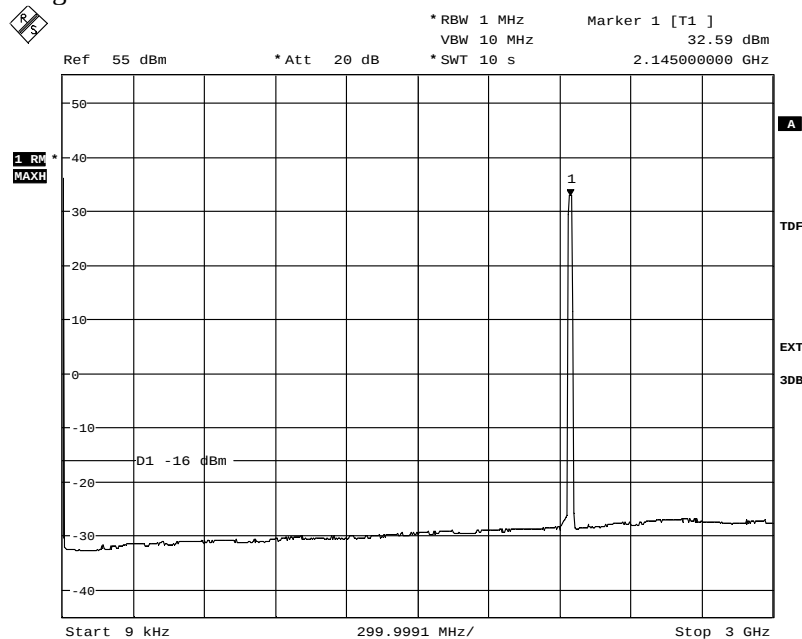

Date: 11.JUN.2012 13:07:00

Diagram 10b:

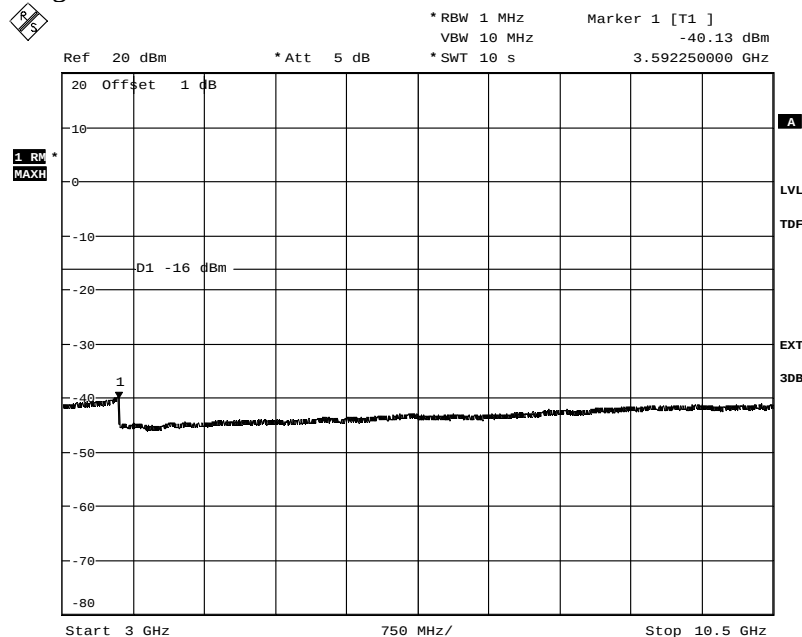


Date: 11.JUN.2012 13:09:38

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 10c:

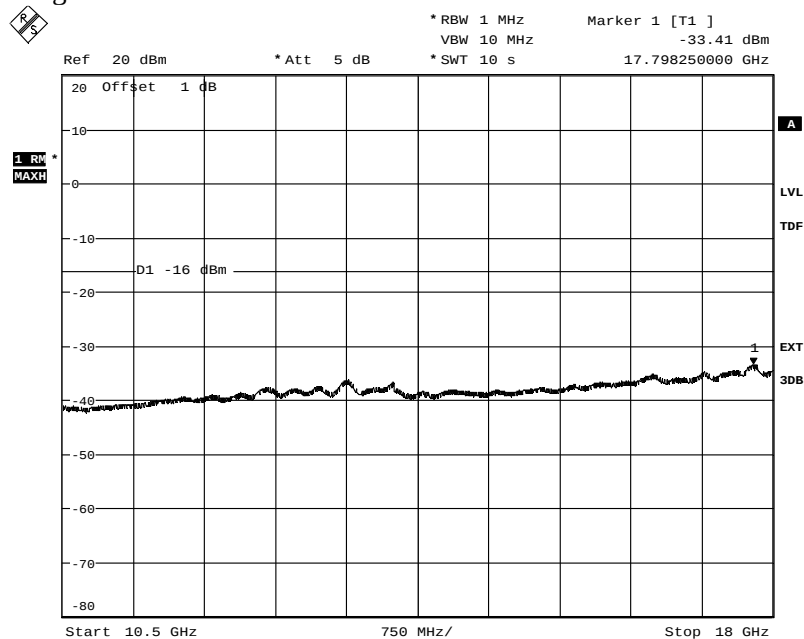

Date: 11.JUN.2012 13:10:45

Diagram 10d:

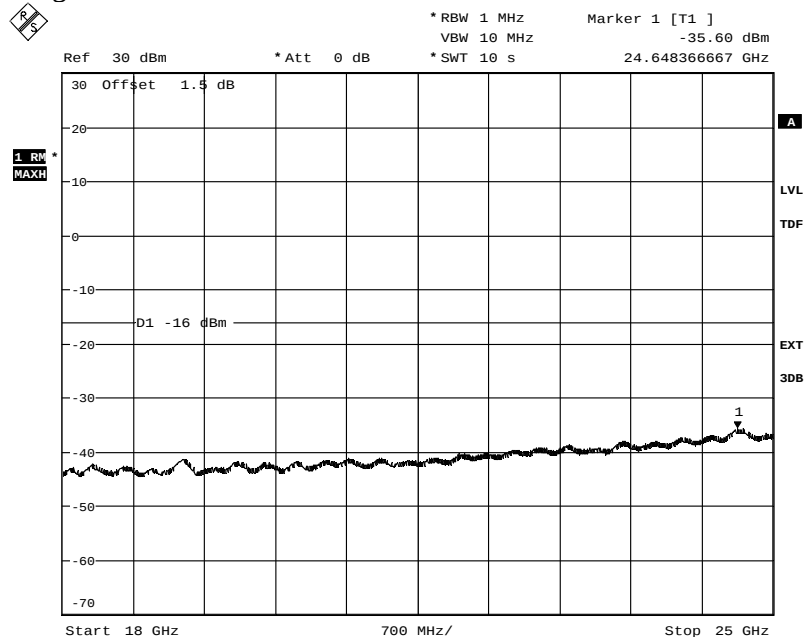


Date: 11.JUN.2012 16:50:02

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 11a:

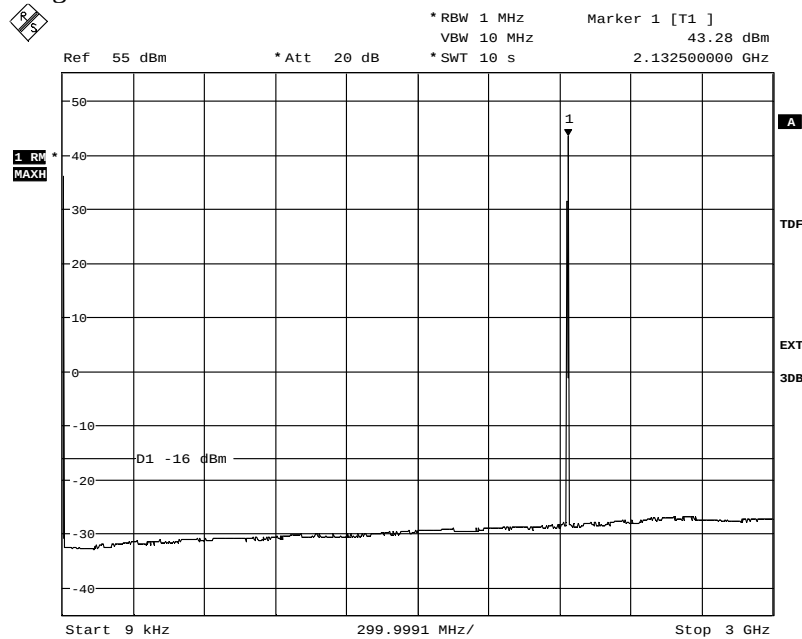

Date: 12.JUN.2012 10:52:59

Diagram 11b:

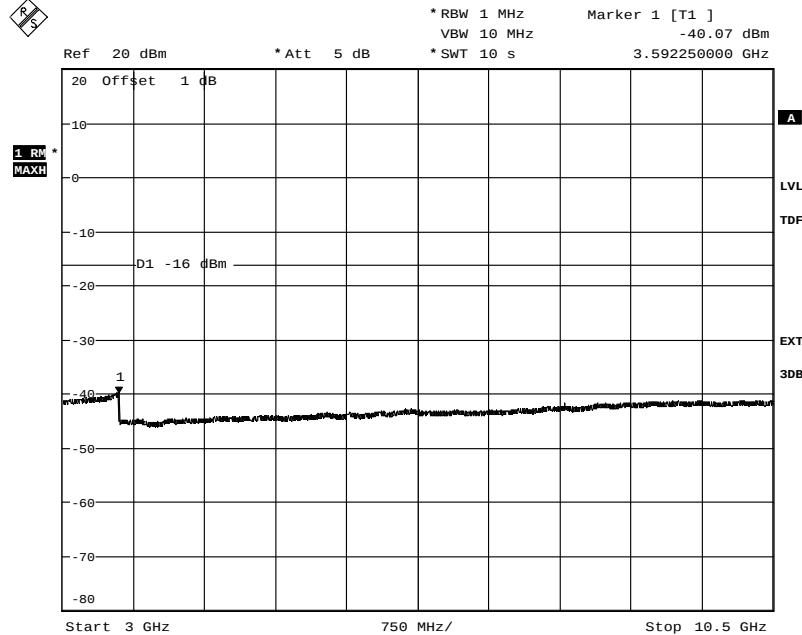


Date: 12.JUN.2012 10:54:44

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 11c:

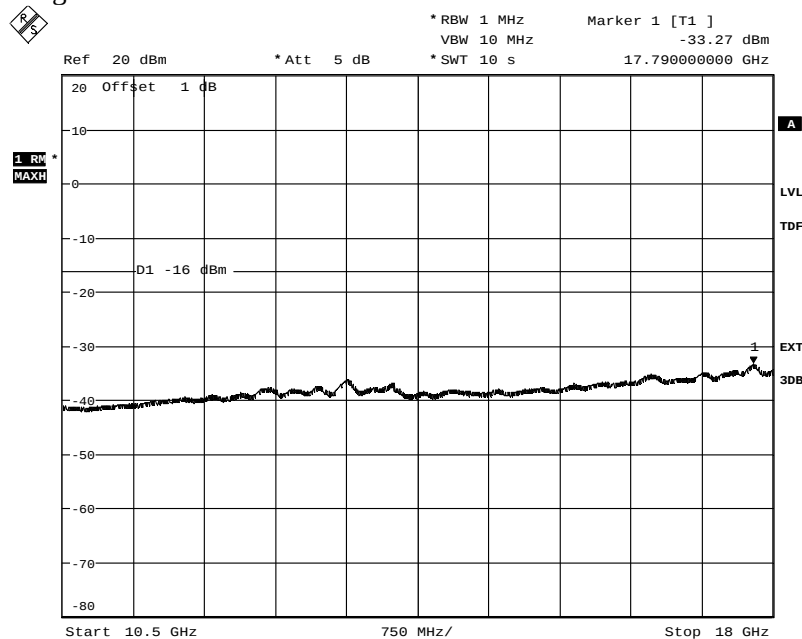

Date: 12.JUN.2012 10:56:09

Diagram 11d:

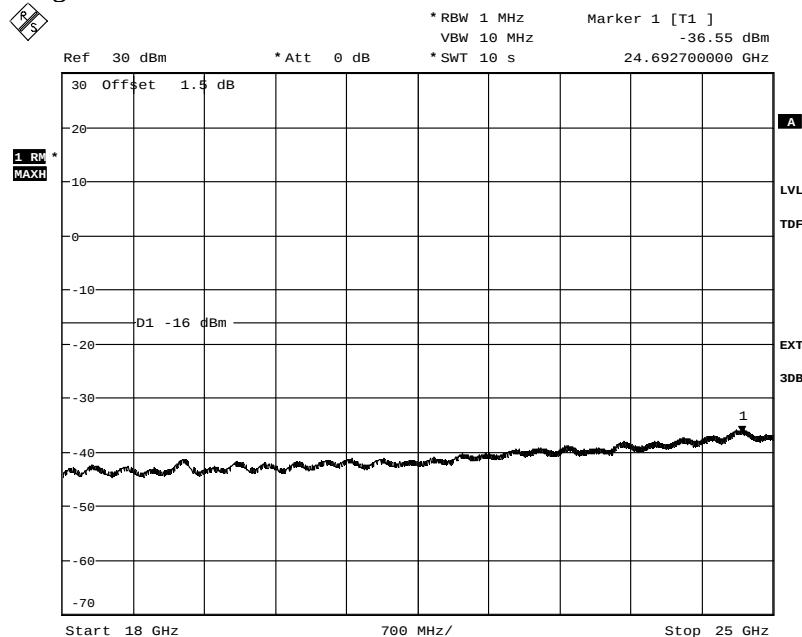


Date: 12.JUN.2012 11:26:28

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 12a:

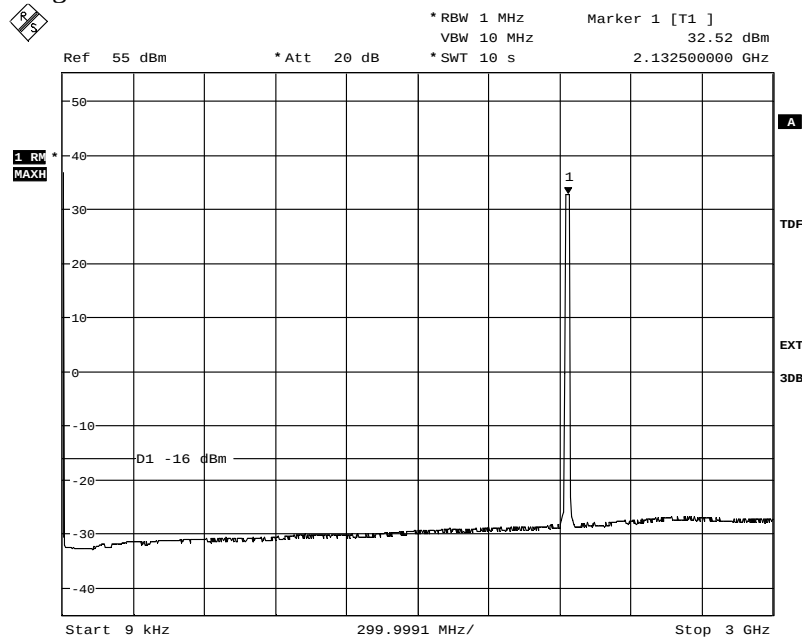

Date: 12.JUN.2012 11:05:09

Diagram 12b:

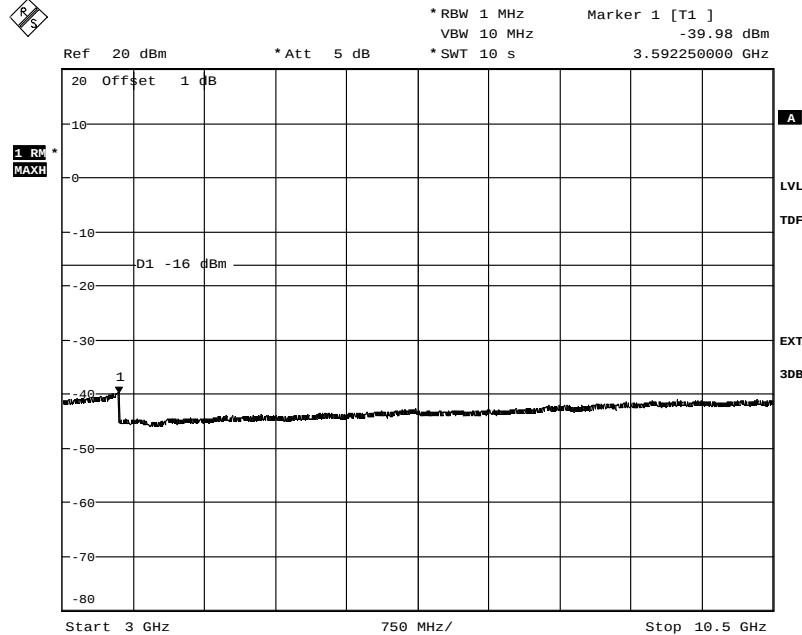


Date: 12.JUN.2012 11:03:22

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481


Appendix 5

Diagram 12c:

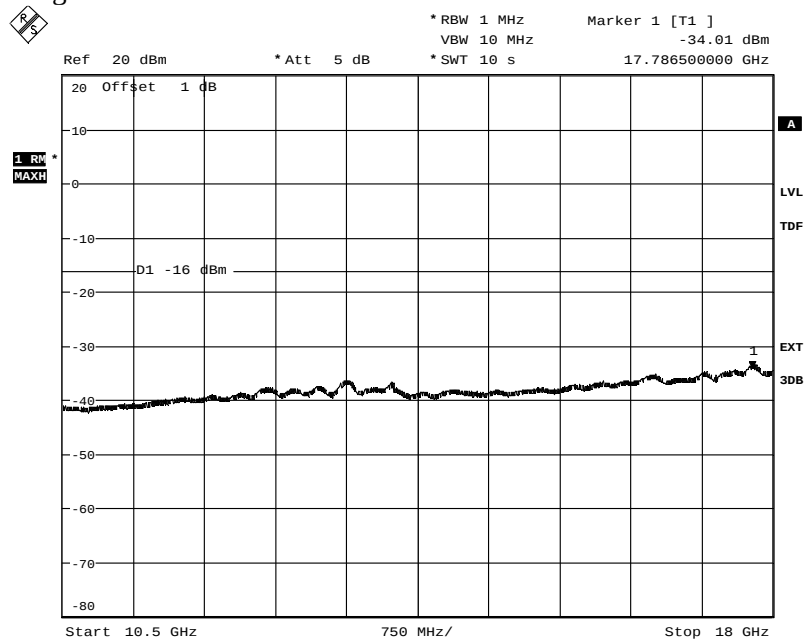

Date: 12.JUN.2012 11:02:01

Diagram 12d:

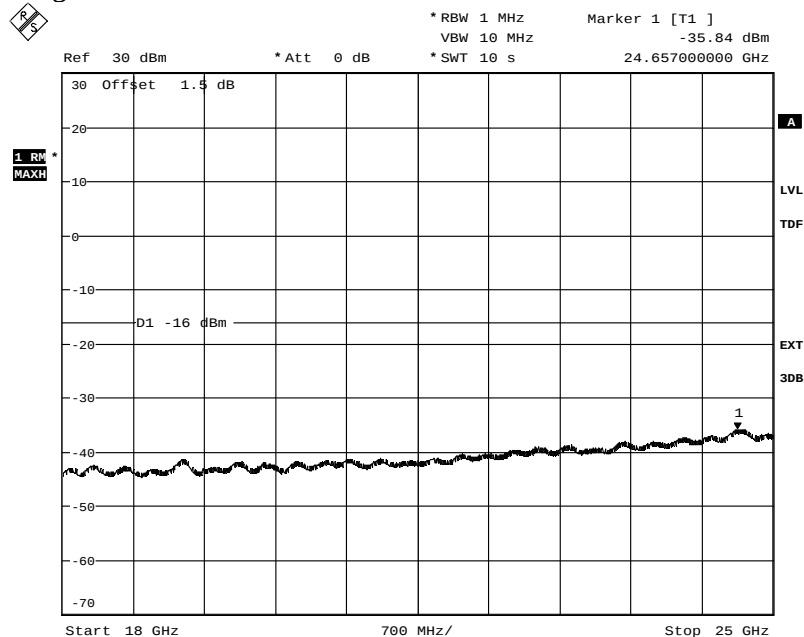

Date: 12.JUN.2012 11:21:18

Field strength of spurious radiation measurements according to CFR 47 §27.53(h) / IC RSS-139 6.5

Date	Temperature	Humidity
2012-09-07	23°C ± 3°C	42 % ± 5 %
2012-09-10	23°C ± 3°C	64 % ± 5 %

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18 - 25 GHz.

In the frequency range 30 MHz - 25 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was

$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 6

The test set-up during the spurious radiation measurement is shown in the picture below:



Measurement equipment

Measurement equipment	SP number
Test site Tesla	503 881
R&S ESI 26	503 292
Control computer	503 479
Software: R&S EMC32, ver. 8.20.1	503 745
Chase Bilog antenna CBL 6111A	503 182
µCorp Nordic, Low Noise Amplifier	504 160
Miteq, Low Noise Amplifier	503 285
EMCO Horn Antenna 3115	502 175
Standard gain antenna 20240-20	503 674
High pass filter, Wainright	504 200
High pass filter, RLC Electronics	503 739
Testo 635 temperature and humidity meter	504 203

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 6

Results

Diagram 1 a-d: 0.03-25 GHz, E-TM1.1, BW 1.4 MHz, (T), representative for worst case

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-25 000	All emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty:

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz

Limits

§27.53(h) and RSS-139 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 6

Diagram 1a:


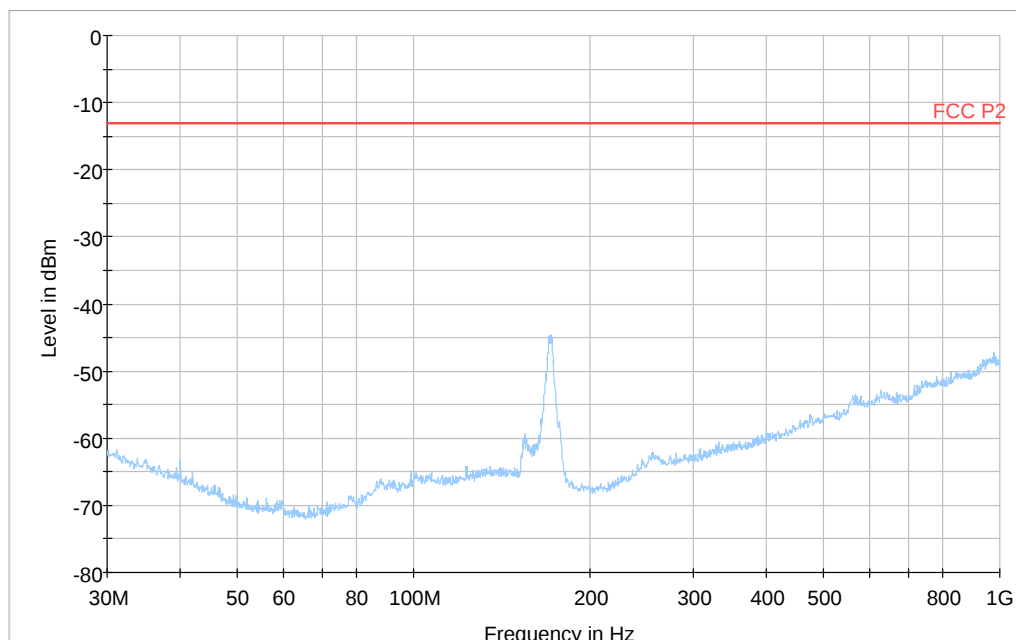


Diagram 1b:

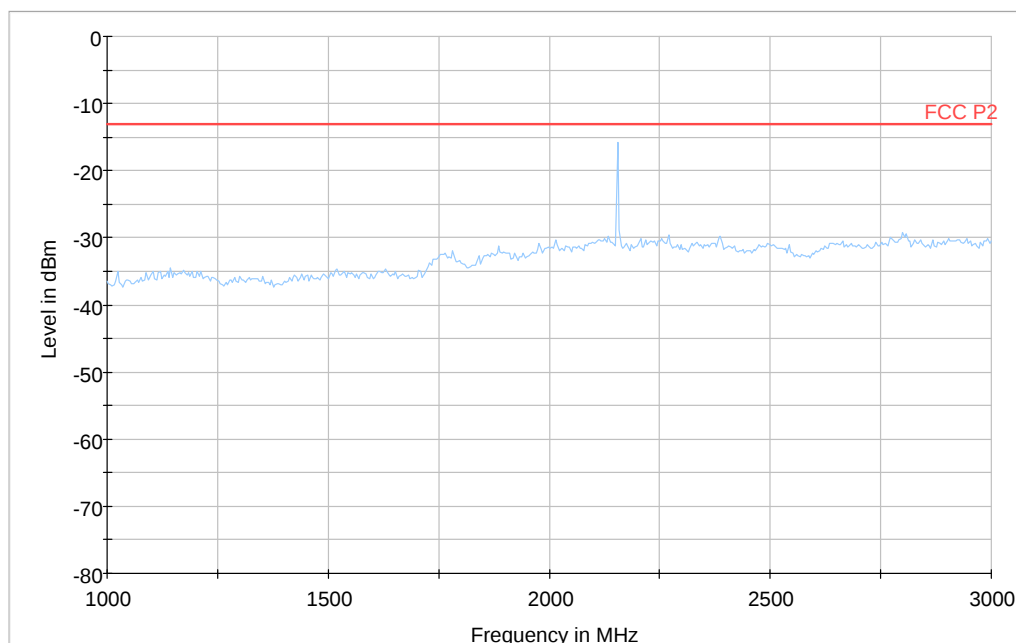


Note: The emission at 2154 MHz is the TX carrier signal and shall be ignored in the context.

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 6

Diagram 1c:

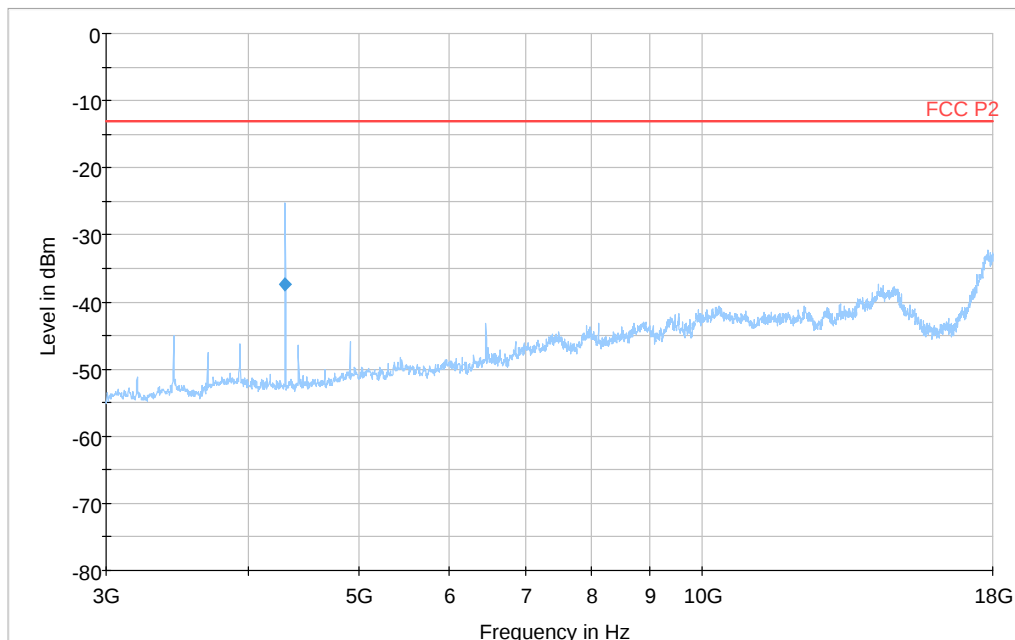


Final RMS Result

Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
4308.159	-37.4	5000.0	1000.000	100.0	H	252.0	-103.2	24.4	-13.0

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 6

Diagram 1d:

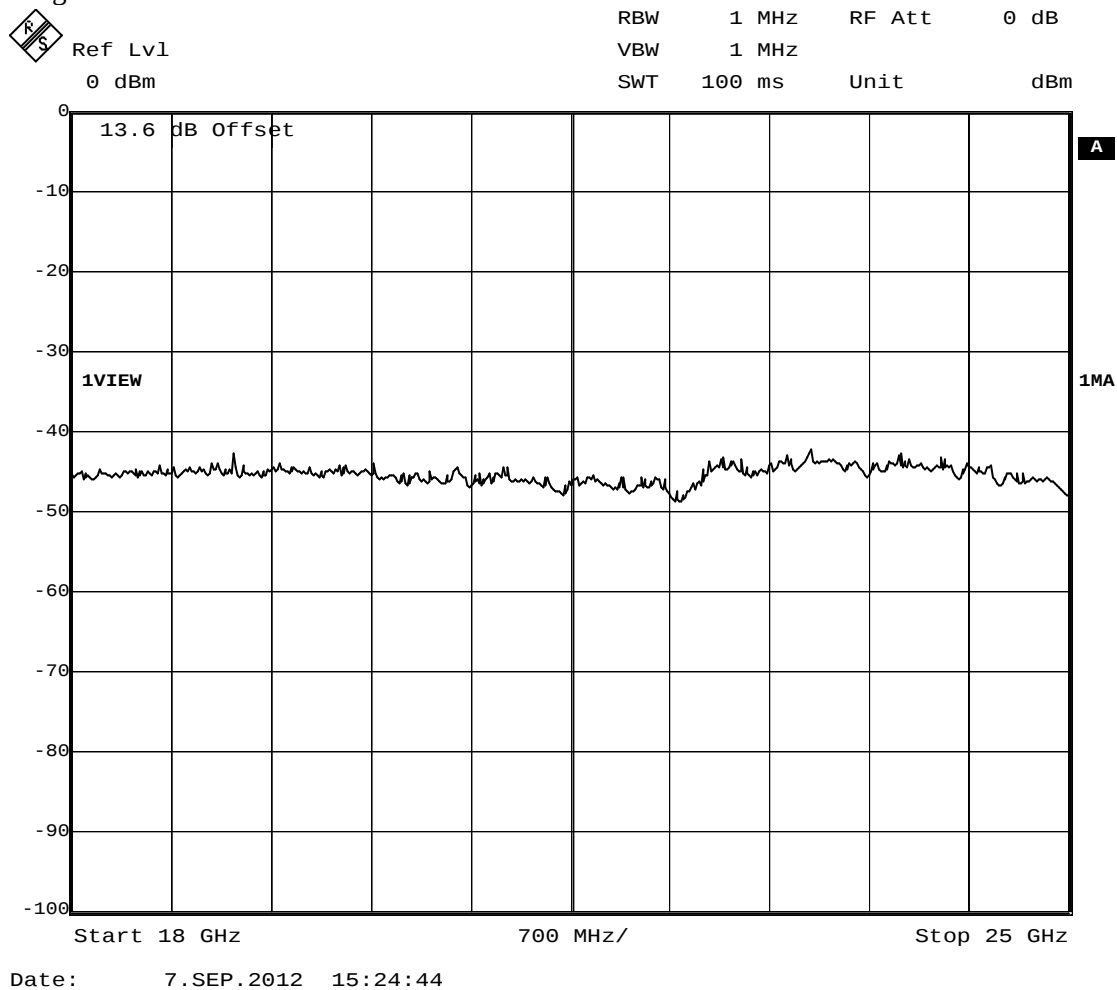

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 7

Frequency stability measurements according to CFR 47 §27.54 / IC RSS 139 6.3

Date 2012-06-08 to 2012-06-13	Temperature (test equipment) 22-23°C ± 3 °C	Humidity (test equipment) 36-47% ± 5 %
----------------------------------	--	---

Test set-up and procedure

The measurement was made per 3GPP TS 36.141. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40, EAB equipment BAMS – 1000294394	-
RF attenuator	503 870
Testo 635, Temperature and humidity meter	504 203
Temperature cabinet	503 360

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 7

Results

Nominal transmitter frequency was 2132.5 MHz in channel bandwidth configuration 5 MHz.
Rated output power level at connector RF A (maximum): 44.8 dBm (30 W).

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	T (°C)	
-48.0	+20	-3
-55.2	+20	+6
-40.8	+20	-5
-48.0	+30	+16
-48.0	+40	+14
-48.0	+50	+6
-48.0	+10	-3
-48.0	0	-4
-48.0	-10	+4
-48.0	-20	-14
-48.0	-30	+25
Maximum freq. error (Hz)		25
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Remark

It was deemed sufficient to test one combination of TX frequency, channel bandwidth configuration and test model (modulation), as all combinations share a common internal reference to derive the TX frequency from.

Limits

According to 3GPP TS 36.141, section 6.5.1.5:
The frequency Error shall be within $\pm(0.05 \text{ PPM} + 12 \text{ Hz})$ ($\pm 110 \text{ Hz}$).

Complies?	Yes
-----------	-----

FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 8

External photos

Front side



Rear side



FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 8

Left side



Right side



FCC ID:TA8AKRC118048-1
IC:287AB-AS1180481

Appendix 8

Top side



Bottom side

