

Handled by, department

Jonas Bremholt

Electronics

+46 10 516 54 38, jonas.bremholt@sp.se

Date

2007-03-23

Reference

F700107-F24

Page

1 (2)

ERICSSON AB
Pehr-Åke Bergström
PDU RBS WCDMA
164 80 Stockholm

**Permissible change measurements on WCDMA Base Station 1900
MHz Radio Unit with FCC ID: TA8AKRC11819-1**
(2 appendices)

Test object

Radio Unit KRC 118 19/1


Summary

Standard	Compliant	Appendix	Remarks
FCC CFR 47			
2.1053 Field strength of spurious radiation	Yes	2	-

**SP Sveriges Tekniska Forskningsinstitut
Electronics - EMC**



Jan Welinder
Technical Manager

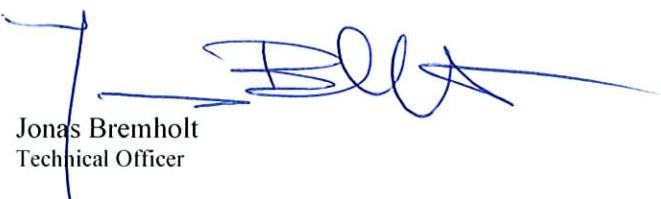

Jonas Bremholt
Technical Officer

SP Technical Research Institute of Sweden

Postal address

SP
Box 857
SE-501 15 Borås
SWEDEN

Office location

Västeråsen
Brinellgatan 4
SE-504 62 Borås
SWEDEN

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Purpose of test	Appendix 1
Test setups	Appendix 1
Field strength of spurious radiation	Appendix 2

Description – Test object

Equipment: WCDMA Radio Unit (RU) 1900 MHz, single and double carrier

Tx Frequency range: 1932.4-1987.6 MHz

Modulations: QPSK and 16QAM

Maximum output power: Single carrier: 1x46 dBm (40W)
Multi carrier: 2x43 dBm (2x20W)

Nominal power voltage: -48 VDC

Tested channels

UARFCN Frequency

9662	1932.4 MHz
9788	1957.6 MHz
9938	1987.6 MHz

Operation mode during measurements

Test models

All measurements were performed with the test object transmitting the test model 1 defined in 3GPP TS 25.141.

Radiated measurements

All radiated measurements were performed with the test object installed in a RBS 2106i cabinet powered with 3-phase 208/120 VAC, 60 Hz. The cabinet was equipped with radio units for both GSM and WCDMA during the measurements. The used configuration represents worst case configuration.

The RU units were activated for maximum transmit power. The RU units were activated as Single Carrier 3x1. The RF output power ports were terminated with 50 ohm loads.

The RU units were allocated to the following UARFCN:

RF configuration: Single Carrier 3x1 40W(3 RU, 1x46 dBm)

Transmission: CBU (T1)

RU	1	2	3
Downlink	9662 (1932.4 MHz)	9788 (1957.6 MHz)	9938 (1987.6 MHz)
Uplink	9262 (1852.4 MHz)	9388 (1877.6 MHz)	9588 (1907.6 MHz)
Test model	1	1	1

16 DPCCHs at 30 ksps (SF=128)

GSM**Transmission: T1**

dTRU	ARFCN	Tx Frequency	Modulation	Configuration
No 1	542	1936.6 MHz	GMSK	Combined+TCC
				-
No 2	572	1942.2 MHz	GMSK	Combined
	666	1961.0 MHz	8-PSK	Combined
No 3	750	1977.8 MHz	GMSK	Uncombined
	780	1983.8 MHz	8-PSK	Uncombined

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in FCC CFR 47 with the test object is installed in an alternative RBS cabinet.

References

Measurements were done according to relevant parts of the following standards:
ANSI/TIA/EIA-603-B-2002
3GPP TS 25.141

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered: 2007-01-12

Manufacturer's representative

Larry Lindström, Ericsson AB


Test engineers

Jonas Bremholt, Nina Johansson and Jörgen Wassholm.

Test witnesses

Lars Hagbjörk, Christer Gustavsson and Behzad Nourparvar Ericsson AB

Test set-up

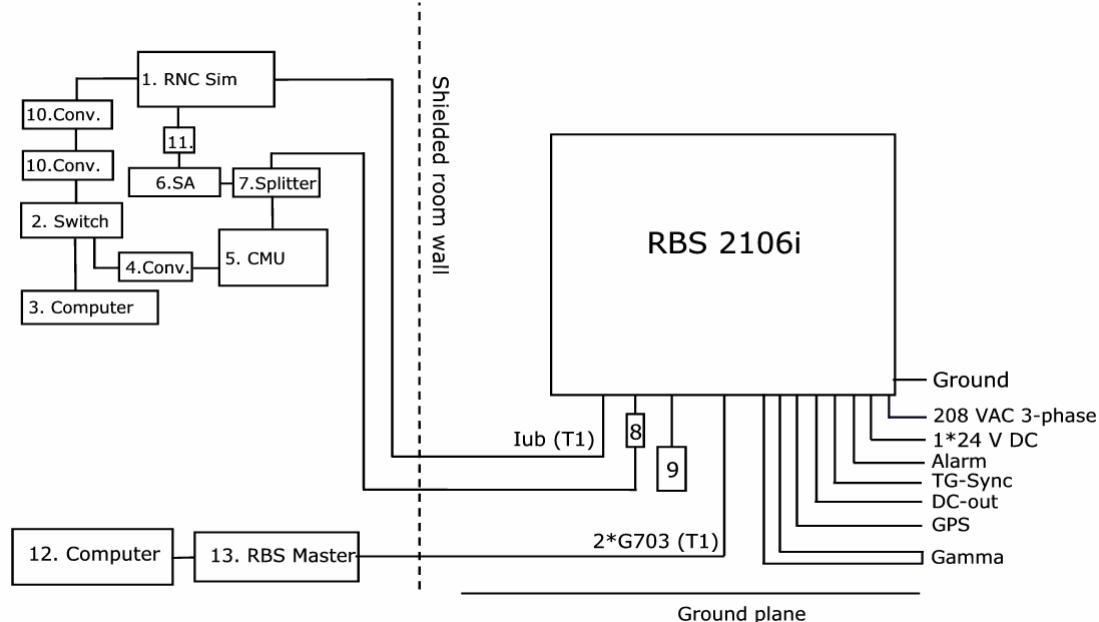

More information about the RBS hardware units are shown in SP document F700107-H24

1. RNC Sim 4780 DA, mini-SIM#53, powered via isolation transformer
2. Fast Ethernet switch, Netgear
3. Computer SUN Microsystems Sun Blade 2500
4. Ethernet/GPIB converter, National Instrument
5. CMU 300, R & S, BAMS-1000290156
6. Spectrum analyzer, R & S, FSIQ 3, BAMS00000000401
7. Splitter, Mini circuit 15542, ZAPD-21
8. Attenuator
9. Dummy loads (50 ohm)
10. D-link media converter
11. Synchronization (10 MHz) with Isolation box
12. Computer, with software RBSMMI ver. R10A05 BAMS 1000208320
13. Ericsson RBS Master 2 LPY 107 1007/1 R1E/A 0000000104, software ver. R6A05

Interfaces:

Power: 208 VAC, 60 Hz

Type of port:

AC mains

Antenna: Coaxial cables 50 ohm

Antenna

GSM

G703: T1, shielded multi-wire with RJ-45 connector

Telecom

TG-sync: Shielded multi-wire, 9-pin DSUB, terminted by DSUB

Signal

Alarm: Shielded multi-wire, 9-pin DSUB, unterminated

Signal

GPS: Shielded multi-wire, unterminated

Signal

WCDMA

Iub configured as T1 by CBU: Shielded multi-wire with RJ-45 connector (120 ohm)

Telecom

Gamma: Shielded multi-wire

Signal

Mub: No cable

Test purposes

Test: No cable

Test purposes

Field strength of spurious radiation measurements according to 47 CFR 2.1053

Date	Temperature	Humidity
2007-01-15 to 2007-01-30	21-22 °C ± 3 °C	14-25 % ± 5 %

Test set-up and procedure

The test site is listed at FCC, Columbia with registration number: 93866. The test site also complies with RSS 212, Issue 1, Industry Canada file no.:IC 3482.

The transmitter was modulated with pseudorandom data during the measurements. The antenna ports were terminated with 50 ohm loads.

The measurements were performed with both horizontal and vertical polarisation of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18-20 GHz.

A pre-measurement was first performed:

In the frequency range 30 MHz-20 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was,

$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \quad \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit is scanned 0-360 degrees and the antenna is scanned 1-4 m for maximum response. The emission is then measured with the average detector and the average value is reported, frequencies closer than 10 dB to the limit measured with the average detector was measured with the substitution method according to the standard.

Measurement equipment	Calibration Due	SP number
Test site, Tesla	2008-11	503 881
Spectrum analyzer R&S ESI 26	2007-07	503 292
Control computer, Fujitsu Siemens	-	-
Software: R&S ES-K1, ver. 1.60	-	503 423
Antenna Chase Bilog CBL 6111A	2008-11	503 182
Horn antenna EMCO 3115	2007-11	502 175
Std gain horn, model 16240-25	-	503 939
Std gain horn, model 18240-25	-	503 900
Std gain horn, model 20240-20	-	s/n 407
Preamplifier Miteq, 0.1-26 GHz	2007-08	503 285
Temperature and humidity meter Testo 615	2007-09	503 505

Appendix 2

The test set-up during the spurious radiation measurements are shown in the picture below.

**Results**

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-20 000	All emission > 20 dB below limit	All emission > 20 dB below limit
Measurement uncertainty		4.7 dB

Limits

§ 24.238 a) The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.

Complies?	Yes
-----------	-----