



REPORT

issued by an FCC listed Laboratory Reg. no. 93866.
The test sites comply with RSS-Gen, IC file no: 3482A

Handled by, department
Jörgen Wassholm
Electronics
+46 105165706, jorgen.wassholm@sp.se

Date
2012-08-22

Reference
FX213277-F24

Page
1 (2)



Ericsson AB
Mia Jernhake
PDU Hardware
164 80 Stockholm

Class II permissive change measurements on RRUS 11 B25 1900 MHz radio equipment with FCC ID: TA8AKRC131146-1 and IC: 287AB-AS1311461 (7 appendices)

Test object

RRUS 11 B25, KRC 131 146/1

Summary

Appendix 1 describes the test object and set-ups during test.
Appendix 7 presents photos of the test object.

Standard	Compliant	Appendix
FCC CFR 47 / IC RSS-133		
2.1046 / RSS-133 6.4 RF power output	Yes	2
2.1049 / RSS-Gen 4.6.1 Occupied bandwidth	Yes	3
2.1051 / RSS-133 6.5 Band edge	Yes	4
2.1051 / RSS-133 6.5 Spurious emission at antenna terminals	Yes	5
2.1053 / RSS-133 6.5 Field strength of spurious radiation	Yes	6

Note: Above RSS-133 items are given as cross-reference only. Measurements were performed according to ANSI procedures referenced by FCC and covered by SP's accreditation.

SP Sveriges Tekniska Forskningsinstitut Electronics - EMC

Jörgen Wassholm
Technical Officer

Christer Karlsson
Technical Manager

SP Technical Research Institute of Sweden

Postal address
SP
Box 857
SE-501 15 Borås
SWEDEN

Office location
Västeråsen
Brinellgatan 4
SE-504 62 Borås
SWEDEN

Phone / Fax / E-mail
+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.



Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Purpose of test	Appendix 1
Test setups	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
External photos	Appendix 7

Description of the test object

Equipment:	Radio equipment RRUS 11 B25 supporting single and multi-standard (LTE and CDMA/ LTE) configured for single and multi-carriers
Antenna ports:	2 TX/RX ports
Frequency bands LTE:	TX: 1930 – 1995 MHz RX: 1850 – 1915 MHz
Frequency bands CDMA:	TX: 1930 – 1990 MHz RX: 1850 – 1910 MHz
Nominal output power per antenna port:	Single carrier: 1x 46.0 dBm (1x 40W) Multi carrier: 2x 43.0 dBm (2x 20W)
Nominal power voltage:	-48 VDC
CDMA Modulations: Channel bandwidth:	QPSK, 8-PSK and 16QAM 1.25 MHz
LTE Modulations: Channel bandwidth:	QPSK, 16QAM and 64QAM 5 MHz, 10 MHz and 15 MHz

LTE:

Tested frequencies and EARFCNs for TX measurements

EARFCN	Frequency [MHz]	Comment
Downlink		
8065	1932.5	TX bottom (B) frequency in 5 MHz BW configuration
8090	1935.0	TX bottom (B) frequency in 10 MHz BW configuration
8115	1937.5	TX bottom (B) frequency in 15 MHz BW configuration
8365	1962.5	TX band mid (M) frequency in all BW configurations
8615	1987.5	TX top (T) frequency in 15 MHz BW configuration
8640	1990.0	TX top (T) frequency in 10 MHz BW configuration
8665	1992.5	TX top (T) frequency in 5 MHz BW configuration

Note: EARFCN are derived according to 3GPP TS 36.141, table 5.7.3-1.

LTE+CDMA

Tested configurations

Configuration 1:

	Port A		Port B	
	LTE	CDMA	CDMA	CDMA
	(20 W)	(20 W)	(20 W)	(20 W)
Downlink	8065 (1932.5 MHz)	145 (1937.25 MHz)	170 (1938.5 MHz)	195 (1939.75 MHz)
Uplink	26065 (1852.5 MHz)	145 (1857.25 MHz)	170 (1858.5 MHz)	195 (1859.75 MHz)
Modulation	QPSK	QPSK	QPSK	QPSK
Bandwidth	5 MHz	1.25 MHz	1.25 MHz	1.25 MHz

Configuration 2:

	Port A		Port B	
	LTE	CDMA	CDMA	CDMA
	(20 W)	(20 W)	(20 W)	(20 W)
Downlink	8355 (1961.5 MHz)	725 (1966.25 MHz)	750 (1967.5 MHz)	775 (1968.75 MHz)
Uplink	26355 (1881.5 MHz)	725 (1886.25 MHz)	750 (1887.5 MHz)	775 (1888.75 MHz)
Modulation	QPSK	QPSK	QPSK	QPSK
Bandwidth	5 MHz	1.25 MHz	1.25 MHz	1.25 MHz

FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 1

Configuration 3:

	Port A		Port B	
	LTE	CDMA	CDMA	CDMA
	(20 W)	(20 W)	(20 W)	(20 W)
Downlink	8665 (1992.5 MHz)	1155 (1987.75 MHz)	1130 (1986.5 MHz)	1105 (1885.25 MHz)
Uplink	26665 (1912.5 MHz)	1155 (1907.75 MHz)	1130 (1906.50 MHz)	1105 (1905.25 MHz)
Modulation	QPSK	QPSK	QPSK	QPSK
Bandwidth	5 MHz	1.25 MHz	1.25 MHz	1.25 MHz

Configuration 4:

	Port A		Port B	
	LTE	CDMA	CDMA	CDMA
	(20 W)	(20 W)	(20 W)	(20 W)
Downlink	8233 (1949.3 MHz)	450 (1952.5 MHz)	475 (1953.75 MHz)	500 (1955.0 MHz)
Uplink	26233 (1869.3 MHz)	450 (1872.5 MHz)	475 (1873.75 MHz)	500 (1875.0 MHz)
Modulation	QPSK	QPSK	QPSK	QPSK
Bandwidth	5 MHz	1.25 MHz	1.25 MHz	1.25 MHz

Configuration 5:

	Port A		Port B	
	LTE	CDMA	CDMA	CDMA
	(20 W)	(20 W)	(20 W)	(20 W)
Downlink	8121 (1938.1 MHz)	450 (1952.5 MHz)	475 (1953.75 MHz)	500 (1955.0 MHz)
Uplink	26121 (1858.1 MHz)	450 (1872.5 MHz)	475 (1873.75 MHz)	500 (1875.0 MHz)
Modulation	QPSK	QPSK	QPSK	QPSK
Bandwidth	5 MHz	1.25 MHz	1.25 MHz	1.25 MHz

Configuration 6:

	Port A		Port B	
	LTE	CDMA	CDMA	CDMA
	(20 W)	(20 W)	(20 W)	(20 W)
Downlink	8084 (1934.4 MHz)	25 (1931.25 MHz)	155 (1937.75 MHz)	180 (1939.0 MHz)
Uplink	26084 (1854.4 MHz)	25 (1851.25 MHz)	155 (1857.75 MHz)	180 (1859.0 MHz)
Modulation	QPSK	QPSK	QPSK	QPSK
Bandwidth	5 MHz	1.25 MHz	1.25 MHz	1.25 MHz

FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 1

Configuration 7:

	Port A		Port B	
	LTE	CDMA	CDMA	CDMA
	(20 W)	(20 W)	(20 W)	(20 W)
Downlink	8396 (1965.6 MHz)	775 (1968.75 MHz)	625 (1961.25 MHz)	650 (1962.5 MHz)
Uplink	26396 (1885.6 MHz)	775 (1888.75 MHz)	625 (1881.25 MHz)	650 (1882.5 MHz)
Modulation	QPSK	QPSK	QPSK	QPSK
Bandwidth	5 MHz	1.25 MHz	1.25 MHz	1.25 MHz

Configuration 8:

	Port A		Port B	
	LTE	CDMA	CDMA	CDMA
	(20 W)	(20 W)	(20 W)	(20 W)
Downlink	8259 (1951.9 MHz)	775 (1968.75 MHz)	625 (1961.25 MHz)	650 (1962.5 MHz)
Uplink	26259 (1871.9 MHz)	775 (1888.75 MHz)	625 (1881.25 MHz)	650 (1882.5 MHz)
Modulation	QPSK	QPSK	QPSK	QPSK
Bandwidth	5 MHz	1.25 MHz	1.25 MHz	1.25 MHz



LTE operation mode during measurements

Measurements were performed with the test object transmitting test models as defined in 3GPP TS 36.141. Test model E-TM1.1 was used to represent QPSK, test model E-TM3.2 to represent 16QAM and test model E-TM3.1 to represent 64QAM payload modulation. The setting TX single carrier with test model E-TM1.1 in channel bandwidth configuration 5 MHz was found to be representative for all traffic scenarios when several settings with different modulations and channel bandwidth configurations were compared to find a worst case setting. This setting was used for all measurements unless otherwise noted. The test object was powered with -48 VDC unless noted otherwise. All measurements were performed with the test object configured for maximum transmit power.

CDMA operation mode during measurements

Measurements were performed with the test object transmitting in 1xRTT and EVDO configurations. 1xRTT is defined in 3GPP2 C.S0002-D-V1.0 and EVDO is defined in TIA 856-B. In 1xRTT mode the test object supported QPSK modulation with supported data rates of 9.6 kbps and 153.6 kbps. In EVDO mode the test object supported QPSK modulation with supported data rate of 614.4 kbps, 8-PSK modulation with supported data rate of 921.6 kbps and 16QAM modulation with supported data rate of 2457.6 kbps.

The settings below were found to be representative for all traffic scenarios when several settings with the different modulations, data rates and the number of carriers were tested to find the worst case setting. These settings were used for all measurements if not otherwise noted.

QPSK modulation
Channel rate: 9.6 kbps
Channel bandwidth: 1.25 MHz

Conducted measurements

The EUT was supplied with -48 VDC by an external power supply. All TX parameters were measured at on port RF A with port RF B terminated into 50 ohm.

Radiated measurements

The test object was powered with -48 VDC. All measurements were performed with the test object configured for maximum transmit power at port RF A and RF B.

Purpose of test

The purpose of the test is to verify compliance of applicable parts of FCC CFR 47 and IC RSS-133 with added supported bandwidths in LTE mode and mixed mode CDMA+LTE configuration.



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 1

References

Measurements were done according to relevant parts of the following standards:

ANSI C63.4-2009

ANSI/TIA/EIA-603-C-2004

3GPP TS 36.141, version 8.5.0

CFR 47 part 2, October 1st, 2011

CFR 47 part 24 Subpart E, October 1st, 2011

RSS-Gen Issue 3

RSS-133 Issue 5

Measurement equipment

Measurement equipment	Calibration Due	SP number
Test site Tesla	2014-01	503 881
R&S FSIQ 40	2013-07	503 738
R&S FSQ 40	2013-07	504 143
R&S ESU 26	2013-03	901 553
Control computer with R&S software EMC32 version 8.52.0	-	503 479
High pass filter	2013-07	504 199
High pass filter	2013-07	901 502
High pass filter	2013-01	901 373
High pass filter	2012-08	503 739
High pass filter	2013-07	503 740
High pass filter	2012-08	504 200
RF attenuator	2013-07	504 159
RF attenuator	2012-10	900 233
RF attenuator	2013-01	901 374
Boonton RF Peak power meter/analyzer	2012-11	503 144
Boonton Power sensor 56518-S/4	2012-11	503 145
Chase Bilog Antenna CBL 6111A	2013-10	503 182
EMCO Horn Antenna 3115	2014-01	502 175
Std.gain horn FLANN model 20240-20	-	503 674
µComp Nordic, Low Noise Amplifier	2013-03	901 545
MITEQ Low Noise Amplifier	2012-08	503 285
Temperature cabinet	-	503 360
Testo 635 Temperature and humidity meter	2013-05	504 203
Testo 625 Temperature and humidity meter	2013-05	504 188

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered: 2012-04-13.

Manufacturer's representative

Christer Gustavsson, Ericsson AB


Test engineers

Tomas Isbring, Hyder Khalaf, Kexin Chen, Jörgen Wassholm, and Martin Theorin, SP

Test participant

Martin Ivanovic, Ericsson AB (Partly present)

Test set-up conducted measurements TX

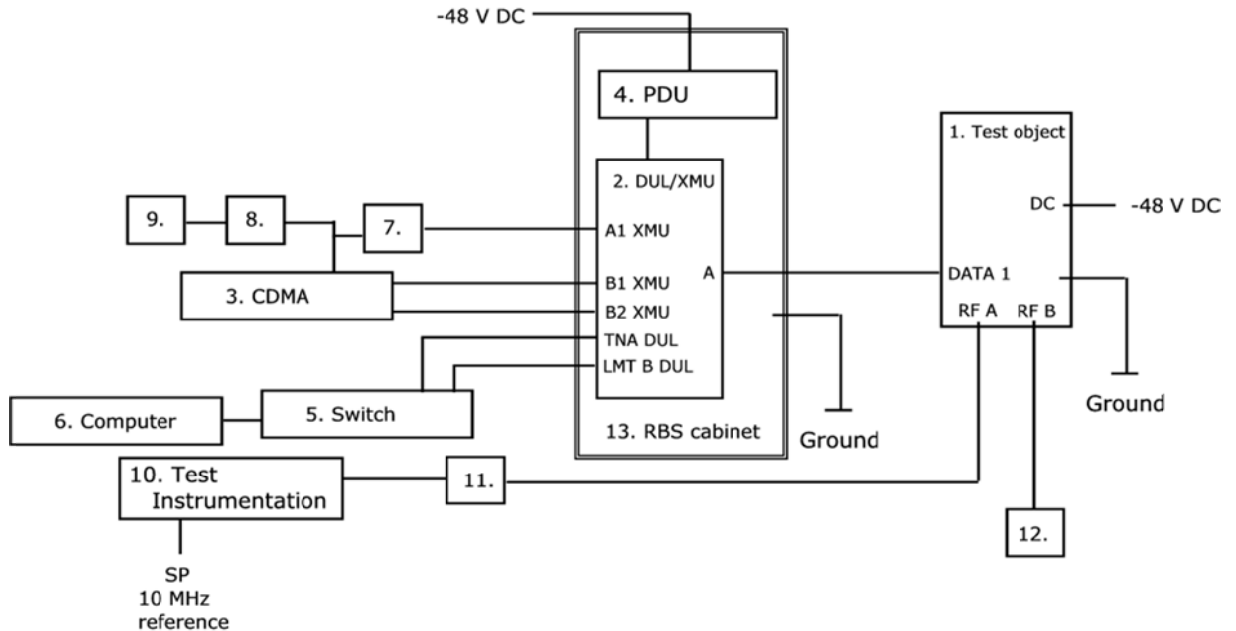


Test object

1. RRUS 11 B25, KRC 131 146/1, rev. R3B, s/n: C826008765
(FCC ID: TA8AKRC131146-1 / IC: 287AB-AS1311461)
with software (PIS): CXP 901 7316/1 rev. R44FK and unlocked working software:
CXP 901 3268/6 rev. R48YA

Functional test equipment

2. DU 1: DUL 02 01, KDU 137 533/4, Rev R1F, S/N: CC49392150 and
DU 2: XMU 02 01, KDU 137 745/1, Rev R2A, S/N: C825744858
3. EMC CDMA NR: 0708, see details on the page 11
4. PDU 02 01, BMG 980 336/4 Rev R2A, S/N: BJ31528316
5. Fast Ethernet switch, Netgear GS108E
6. Computer HP Elitbook 8540w, BAMS – 1001052043
7. GPS splitter KRY 101 1946/1 P1B BU91444275
8. GPS 0201 NCD 901 41/1 R1D A401724356
9. GPS antenna
10. SP test instrument according measurement equipment list
11. SP test instrument according measurement equipment list
12. Attenuator/ terminator
13. RBS 6201 cabinet, BAMS – 1000778792

Test set-up, radiated measurements

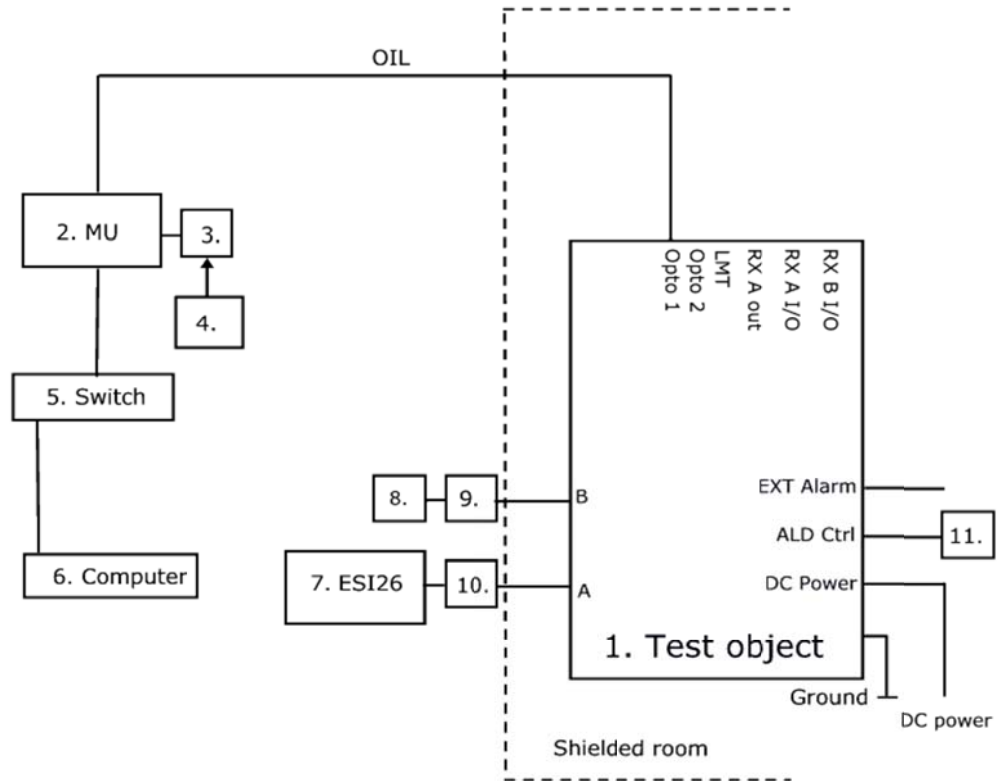

Test object

1. RRUS 11 B25, KRC 131 146/1, rev. R3B, s/n: C826008765
(FCC ID: TA8AKRC131146-1 / IC: 287AB-AS1311461)
with software (PIS): CXP 901 7316/1 rev. R44FK and unlocked working software:
CXP 901 3268/6 rev. R48YA

Functional test equipment

2. RBS 6601 Main Unit, see table below and EMC CDMA rack NR:0708 BAMS-1001029599
3. Jointing Box, NCD 901 40/1, rev. R1D, s/n: A401724356
4. GPS antenna
5. Fast Ethernet switch, Netgear GS108 BAMS-1000840042
6. Computer HP Elitebook BAMS-1001052032
7. Spectrum analyser ESI26 SP 503292
8. Terminator
9. Attenuator
10. Attenuator
11. RET – Remote Electrical Tilt unit

FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 1

Test object ports

Interface:	Type of port:
Power: -48 VDC	DC Power
Antenna port (A) "RF A", 7/16 connector	Antenna
Antenna port (B) "RF B", 7/16 connector	Antenna
Opto 1, Optical Interface Link, single mode opto fibre	Telecom
Opto 2, Optical Interface Link, no opto attached	Telecom
LMT, for maintenance use only	Telecom
RX A Out, no cable attached	Antenna
RX A I/O, no cable attached	Antenna
RX B I/O, no cable attached	Antenna
EXT Alarm, shielded multi-wire	Signal
ALD Ctrl, shielded multi-wire	Signal
Ground wire	Ground

EMC CDMA NR: 0708, BAMS – 1001029599

Product name	Product number	R-state	Serial number
PDU 02 01	BMG 980 336/4	R2B	C941002722
X-CEEM	NTLK86AAE5 02	-	NNTMPX00PKM1
PWR	NTLK70AA 06	-	NNTMPX00MMNN
PWR ALM	NTLK75AA 03	-	NNTMPX00PR83
DOM-A	NTLK78AAE5 03	-	NNTMPX00R3JV
DOM-A	NTLK78AAE5 03	-	NNTMPX00R3KX
X-CEEM	NTLK86AAE5 02	-	NNTMPX00MRRK
POWER SUPPLY SM 52-30	-	-	BAMS – 0000012187

RBS 6601 Main Unit

Product name	Product number	R-state	Serial number
DUL 20 01	KDU 137 533/4	R1F	CC49392150
XMU 02 01	KDU 137 745/1	R2A	C825744858
SUP 6601	1/BFL 901 009/1	R3B	BR81174230

RBS software

LTE:

Software	Revision
CXP 102 051/16	R15AVXMU2

CDMA:

Software	Revision
Vortex ver. 1804_12wk07	-

RF power output measurements according to CFR 47 §24.232 / IC RSS-133 6.4

Date	Temperature	Humidity
2012-08-09	21 °C ± 3 °C	47 % ± 5 %
2012-08-14	20 °C ± 3 °C	50 % ± 5 %
2012-08-15	20 °C ± 3 °C	48 % ± 5 %

Test set-up and procedure

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A resolution bandwidth of 50 MHz was used.

Measurement equipment	SP number
RF attenuator	900 233
Testo 635, temperature and humidity meter	504 203
Rhode & Schwarz FSQ 40	504 143

Measurement uncertainty: 1.1 dB

Results

LTE:

Diagram	BW configuration	Tested frequency
1	10 MHz	B
2	15 MHz	B
3	5 MHz	M
4	10 MHz	M
5	15 MHz	M
6	10 MHz	T
7	15 MHz	T

LTE+ CDMA:

Diagram	Configuration
8	1
9	2
10	3



Limits

§24.232 Federal Register / Vol. 73, No. 86

The maximum output power may not exceed 1640 W/MHz (EIRP).

The Peak to Average Ratio (PAR) may not exceed 13 dB.

RSS-133: The average equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510. Moreover, base station transmitters operating in the band 1930-1995 MHz shall not have output power exceeding 100 watts.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio(PAR) of the power shall not exceed 13 dB.


Complies?	Yes
-----------	-----



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461


Appendix 2

Diagram 1

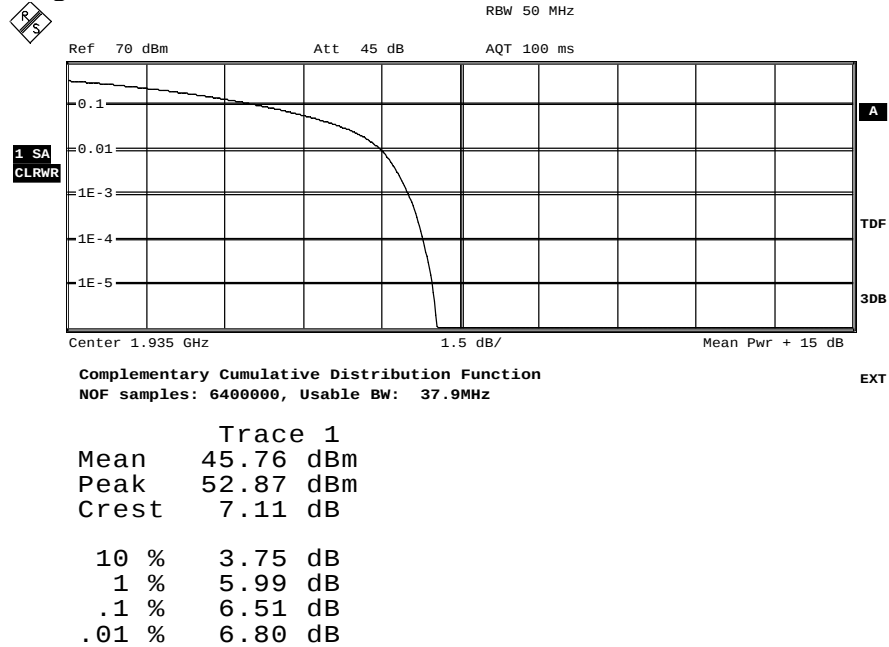

Date: 15.AUG.2012 11:06:21

Diagram 2

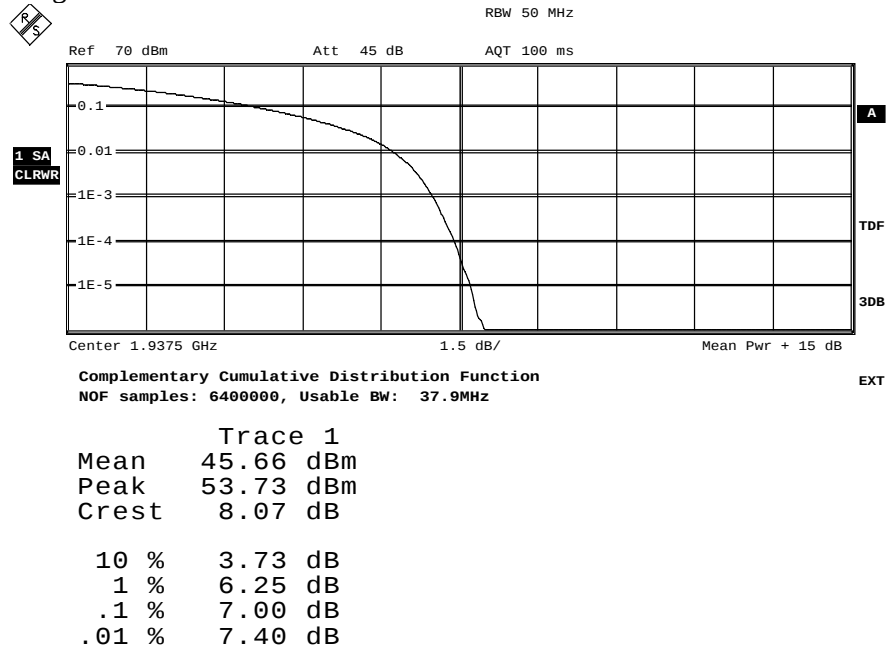


Date: 15.AUG.2012 12:53:39

FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 2

Diagram 3

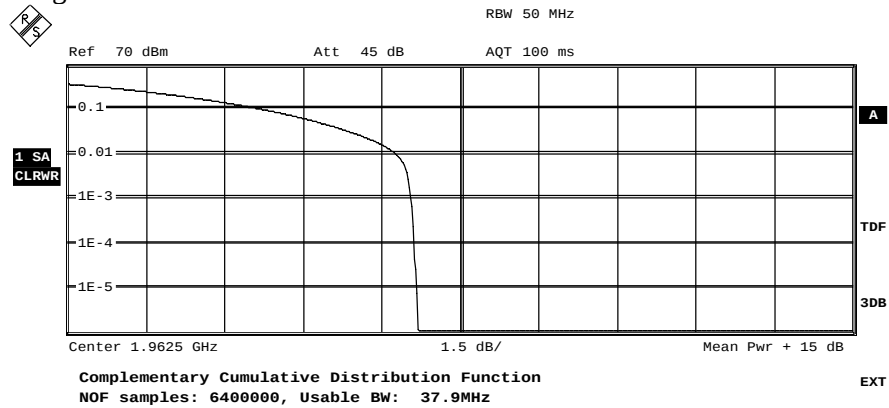


Trace 1

Mean	45.72 dBm
Peak	52.40 dBm
Crest	6.68 dB
10 %	3.75 dB
1 %	6.27 dB
.1 %	6.56 dB
.01 %	6.63 dB

Date: 9.AUG.2012 14:46:30

Diagram 4

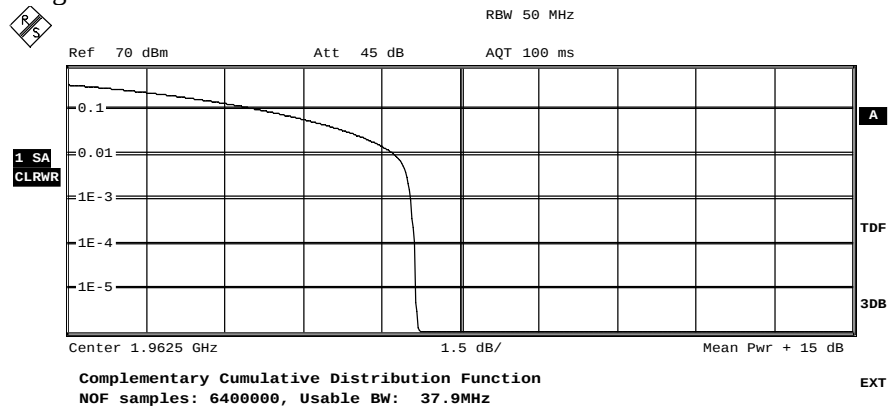

Trace 1


Mean	45.69 dBm
Peak	52.40 dBm
Crest	6.71 dB
10 %	3.73 dB
1 %	6.25 dB
.1 %	6.56 dB
.01 %	6.63 dB

Date: 9.AUG.2012 14:18:21

FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 2

Diagram 5

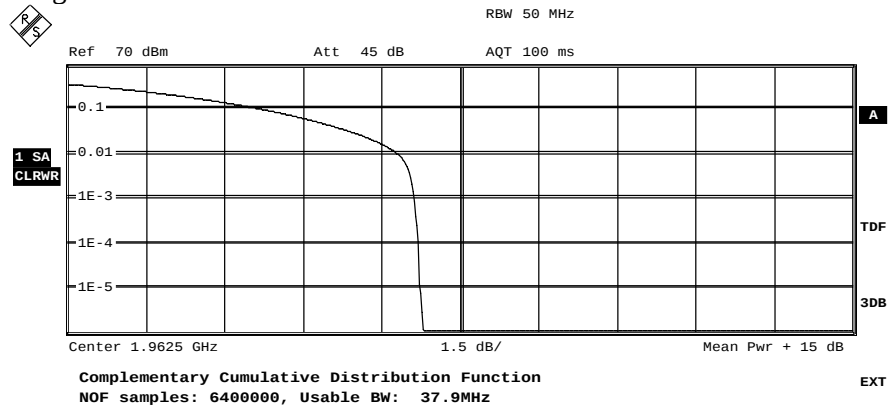


Trace 1
Mean 45.62 dBm
Peak 52.40 dBm
Crest 6.78 dB

10 % 3.75 dB
1 % 6.30 dB
.1 % 6.63 dB
.01 % 6.71 dB

Date: 9.AUG.2012 13:53:45

Diagram 6

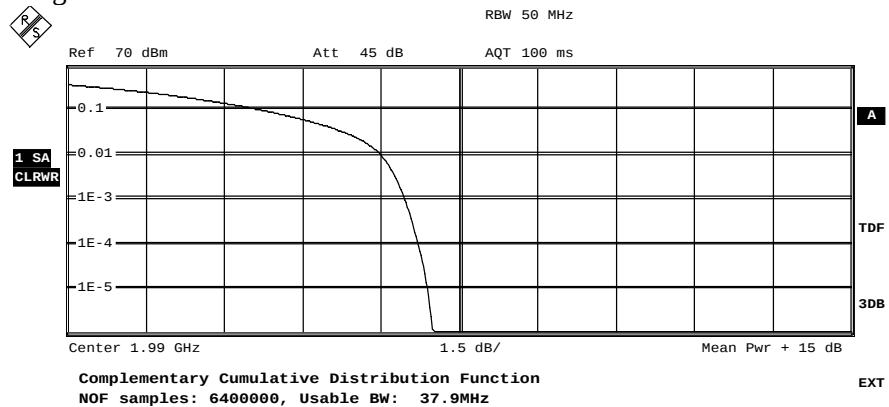

Trace 1
Mean 45.73 dBm
Peak 52.80 dBm
Crest 7.07 dB

10 % 3.75 dB
1 % 5.99 dB
.1 % 6.47 dB
.01 % 6.71 dB


Date: 15.AUG.2012 13:30:57



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 2

Diagram 7

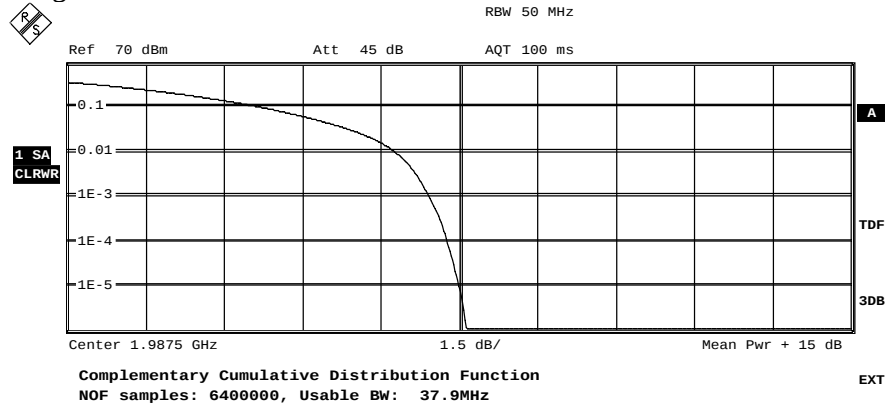


Trace 1
Mean 45.67 dBm
Peak 53.36 dBm
Crest 7.69 dB

10 % 3.75 dB
1 % 6.27 dB
.1 % 6.92 dB
.01 % 7.26 dB

Date: 15.AUG.2012 13:25:05

Diagram 8

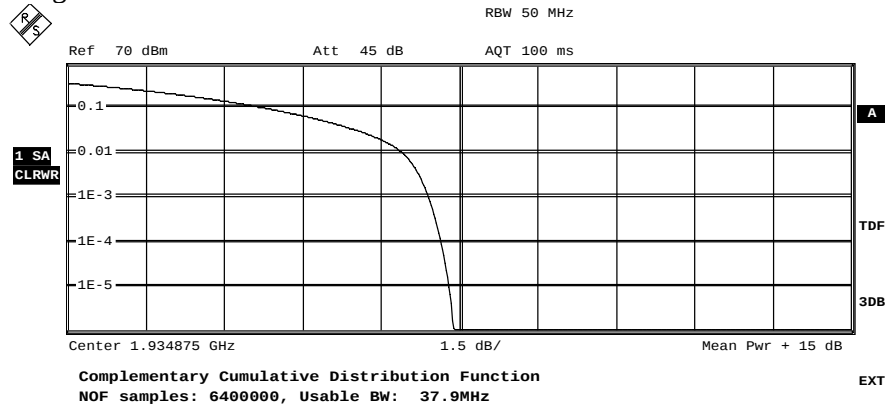

Trace 1
Mean 45.36 dBm
Peak 52.87 dBm
Crest 7.51 dB

10 % 3.82 dB
1 % 6.39 dB
.1 % 6.92 dB
.01 % 7.16 dB


Date: 14.AUG.2012 13:53:46



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 2

Diagram 9

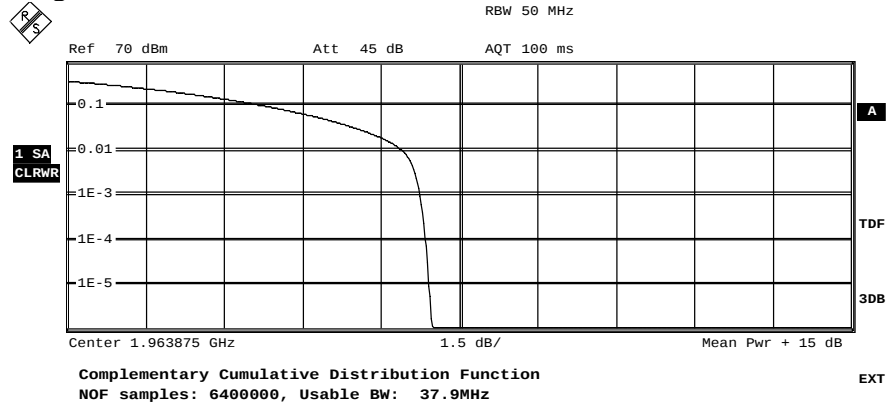


Trace 1
Mean 45.71 dBm
Peak 52.68 dBm
Crest 6.97 dB

10 % 3.82 dB
1 % 6.39 dB
.1 % 6.75 dB
.01 % 6.85 dB

Date: 14.AUG.2012 15:07:03

Diagram 10

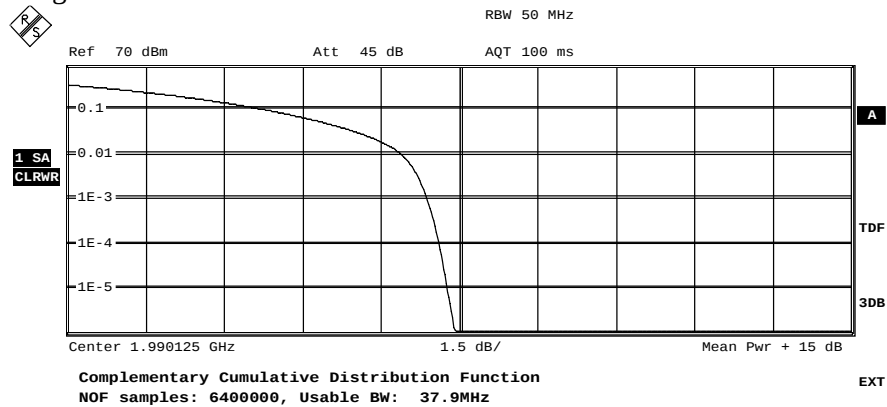

Trace 1
Mean 45.33 dBm
Peak 52.80 dBm
Crest 7.48 dB

10 % 3.82 dB
1 % 6.39 dB
.1 % 6.88 dB
.01 % 7.12 dB

Date: 14.AUG.2012 14:29:58

Occupied bandwidth measurements according to CFR 472.1049 / IC RSS-Gen 4.6.1

Date	Temperature	Humidity
2012-08-09	21 °C ± 3 °C	47 % ± 5 %
2012-08-15	20 °C ± 3 °C	48 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a signal analyzer with the RMS detector activated. The signal analyzer was connected to an external 10 MHz reference standard during the measurements.


Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	900 233
Testo 615 temperature and humidity meter	503 498

Measurement uncertainty: 3.7 dB

Results


Diagram	BW configuration	Tested frequency	OBW / [MHz]
1	10 MHz	B	8.94
2	15 MHz	B	13.43
3	5 MHz	M	4.48
4	10 MHz	M	8.94
5	15 MHz	M	13.42
6	10 MHz	T	8.94
7	15 MHz	T	13.43

Diagram 1

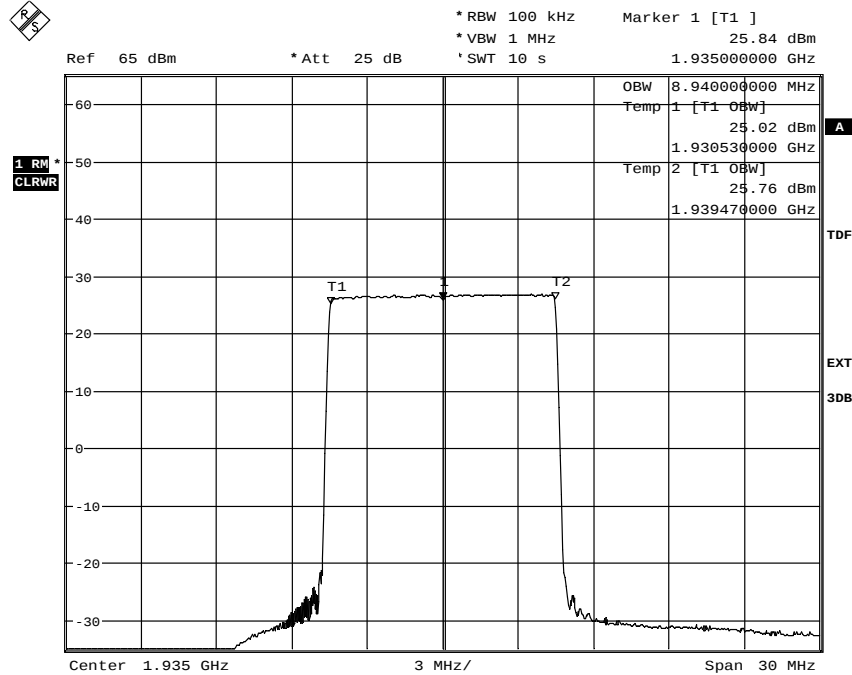


Date: 15.AUG.2012 12:43:48

Diagram 2

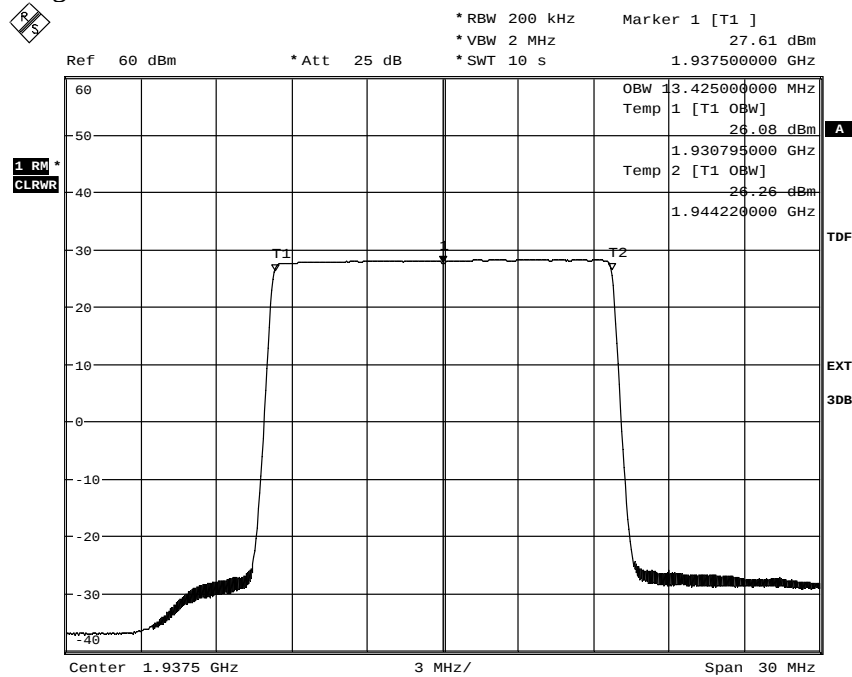


Date: 15.AUG.2012 12:51:19

Diagram 3

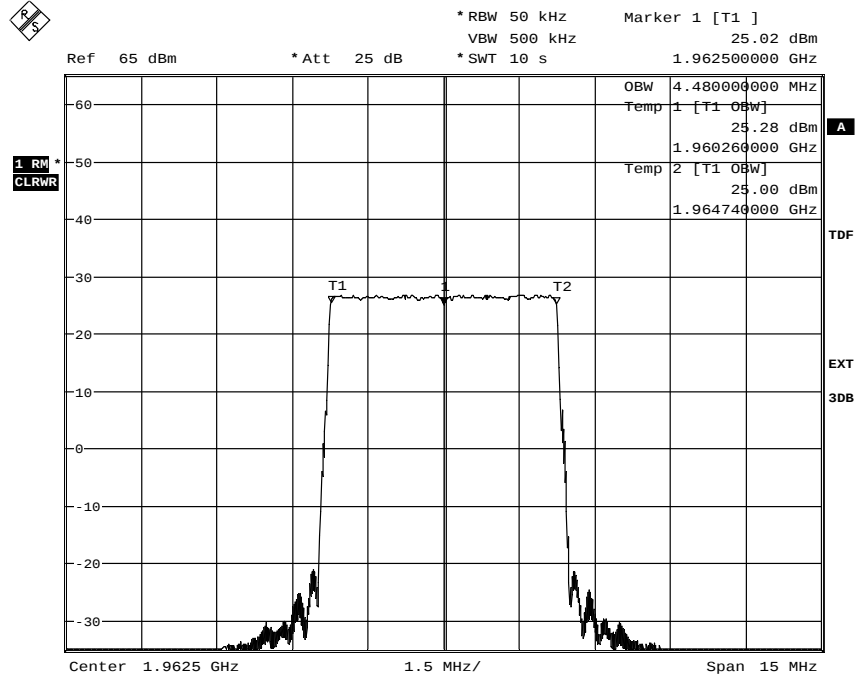


Date: 9.AUG.2012 14:49:20

Diagram 4

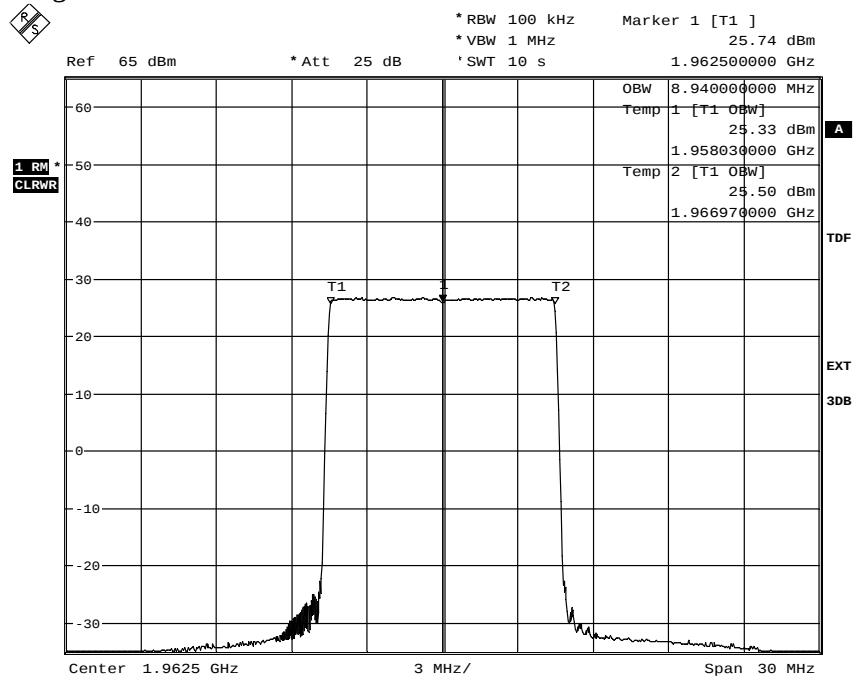


Date: 15.AUG.2012 13:43:03

Diagram 5

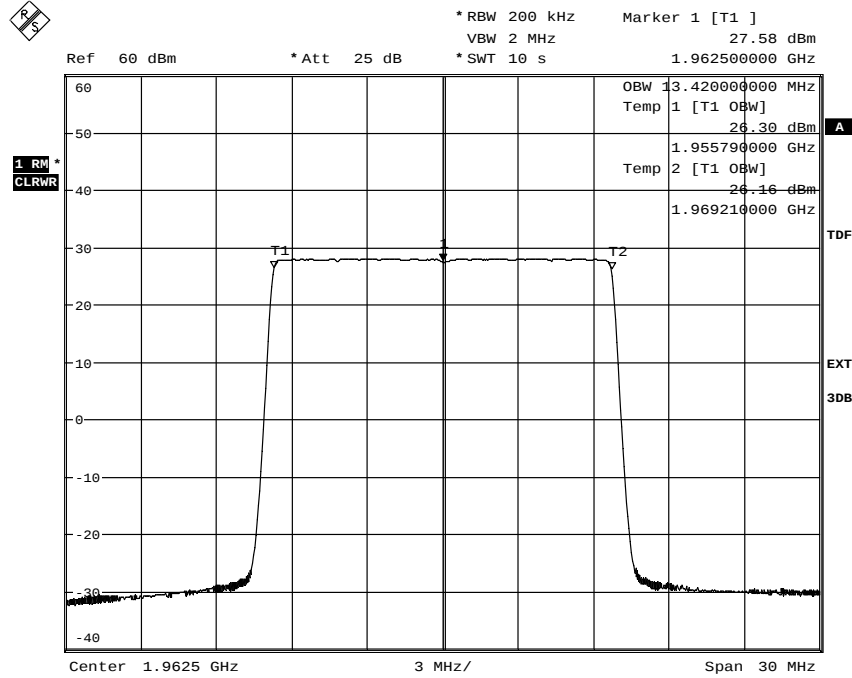

Date: 9.AUG.2012 13:56:58

Diagram 6

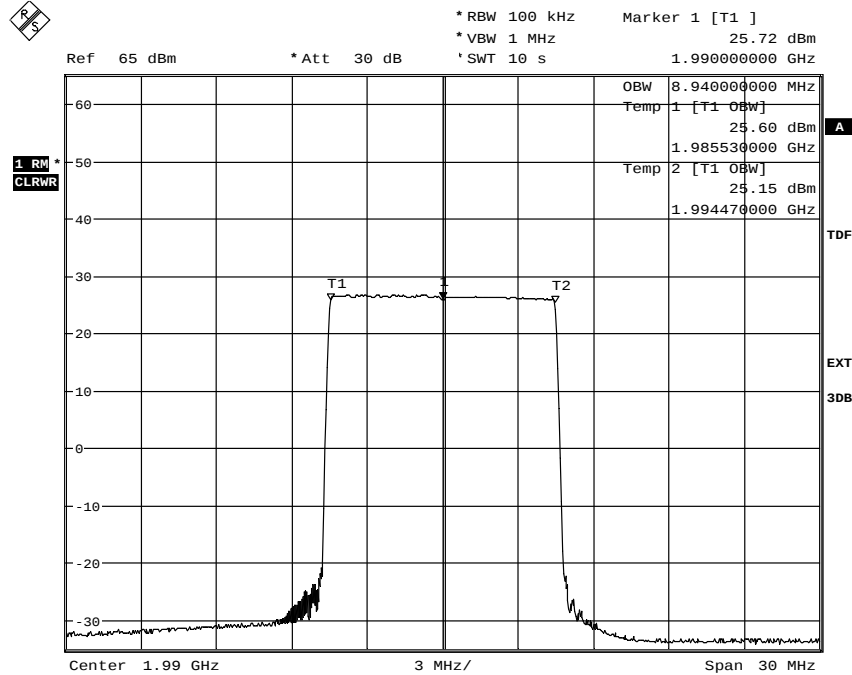


Date: 15.AUG.2012 12:32:11



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 3

Diagram 7

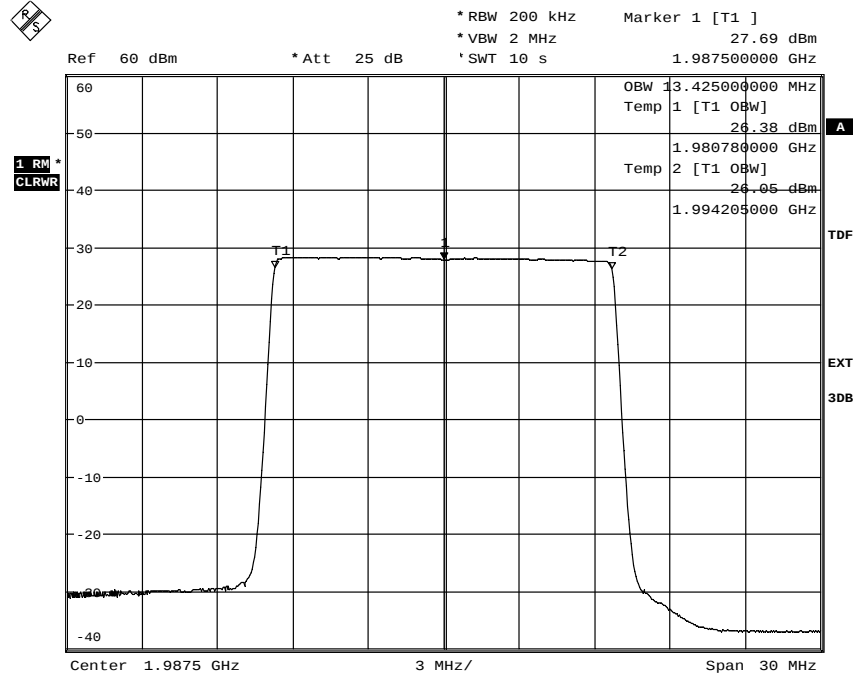

Date: 15.AUG.2012 13:22:29

Band edge measurements according to CFR 47 §24.238 / IC RSS-133 6.5

Date 2012-08-09	Temperature 21 °C ± 3 °C	Humidity 47 % ± 5 %
--------------------	-----------------------------	------------------------

Test set-up and procedure

The measurements were made per definition in §24.238 The test object was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Beyond the 1st MHz off the band edges the limit was adjusted to compensate for reduced measurement bandwidths pursuant to the FCC rules, specifying a RBW of at least 1% of the fundamental emission bandwidth up to 1 MHz away from the band edges and a RBW of 1 MHz for measurements of emissions more than 1 MHz away from the band edges. A resolution bandwidth of 200 kHz was used 1 MHz to 6 MHz away from the band edges, to compensate for the reduced resolution bandwidth and 10 log (N) according to FCC KDB662911, the limit was adjusted by 7 dB to -20 dBm.

Measurement equipment	SP number
RF attenuator	900 233
Testo 635, temperature and humidity meter	504 203
Rhode & Schwarz FSQ 40	504 143

Measurement uncertainty: 3.7 dB

Results

Diagram	BW configuration	Tested frequency
1 a+b+c	5 MHz	B
2 a+b+c	10 MHz	B
3 a+b+c	15 MHz	B
4 a+b+c	5 MHz	T
5 a+b+c	10 MHz	T
6 a+b+c	15 MHz	T


Limits

CFR 47 §24.238 and RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.


Complies?	Yes
-----------	-----

Diagram 1 a

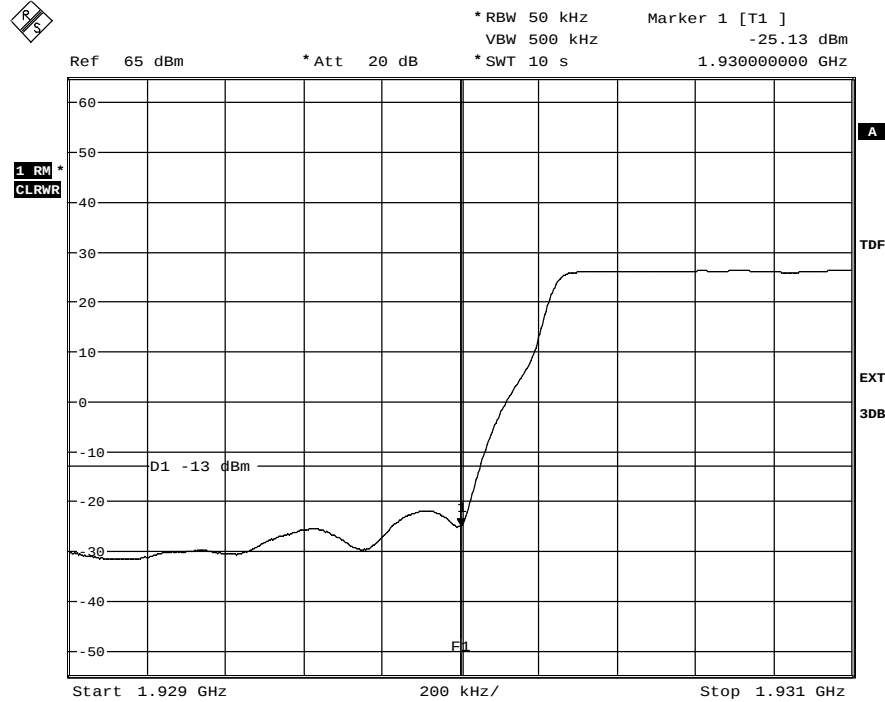

Date: 9.AUG.2012 09:43:43

Diagram 1 b

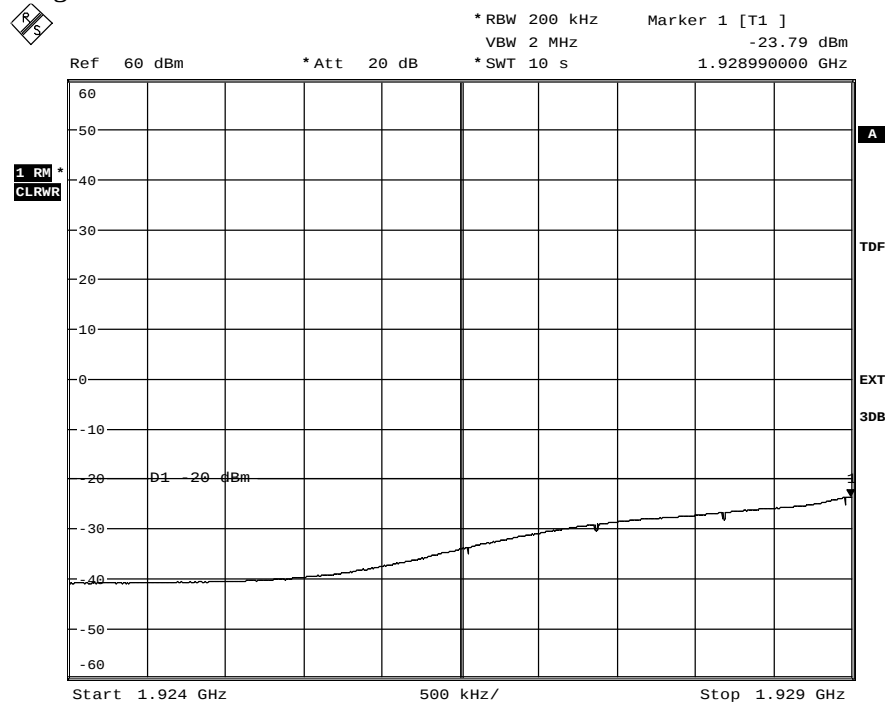


Date: 9.AUG.2012 09:04:00



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461


Appendix 4

Diagram 1 c:

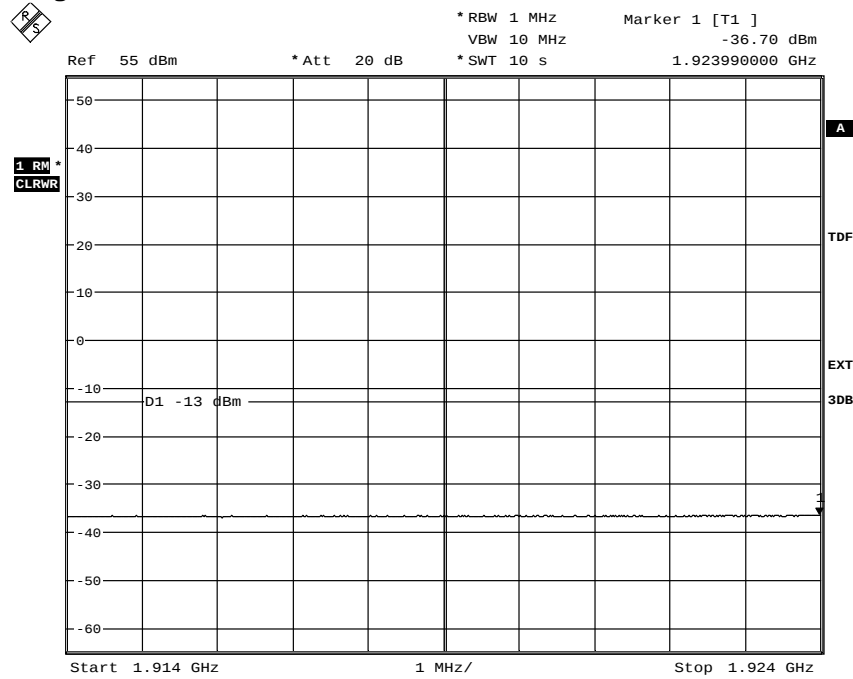


Date: 9.AUG.2012 09:05:35

Diagram 2 a

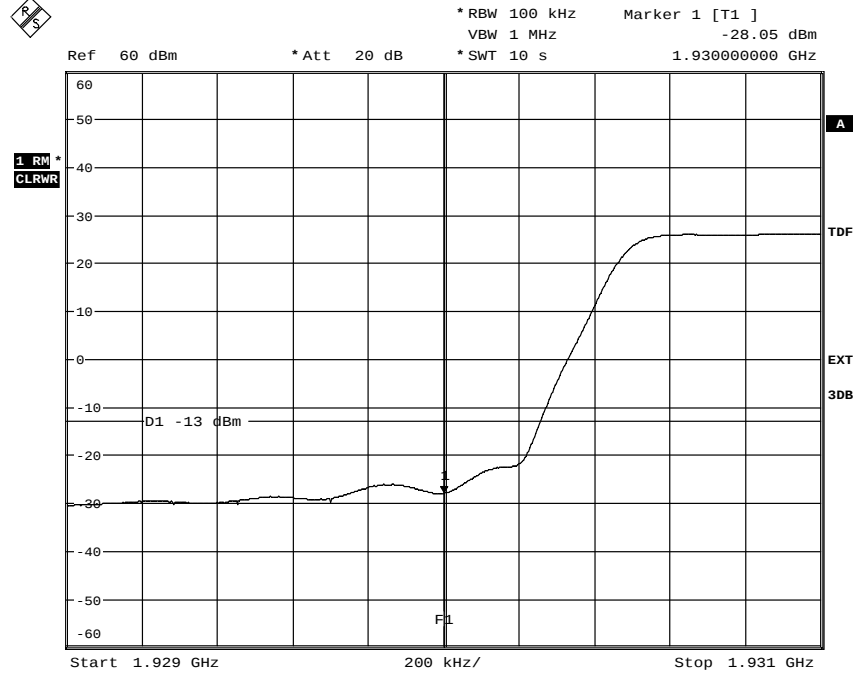

Date: 9.AUG.2012 09:11:31

Diagram 2 b

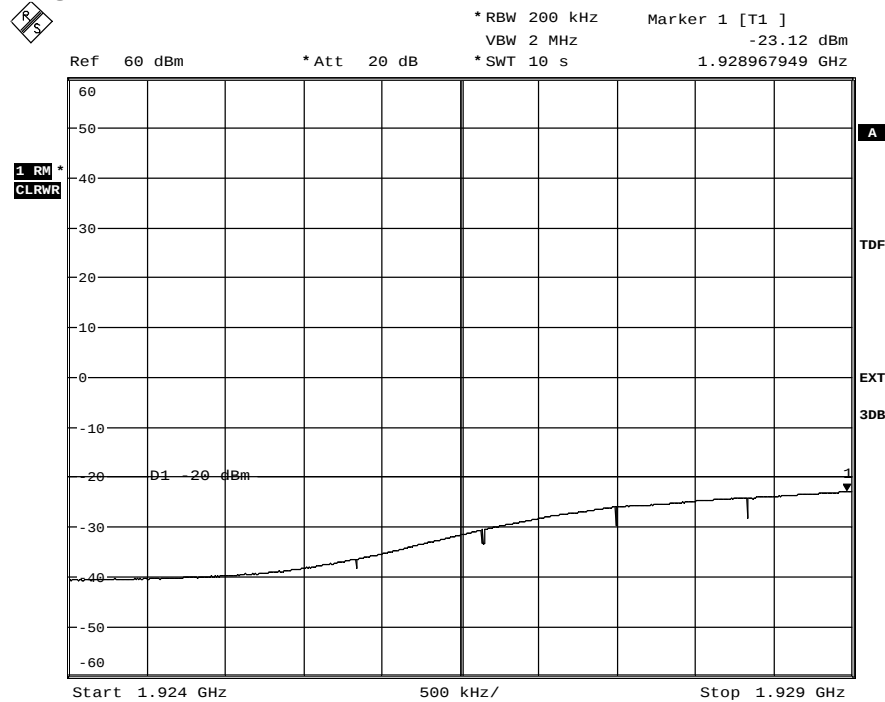


Date: 9.AUG.2012 09:21:55



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 4

Diagram 2 c

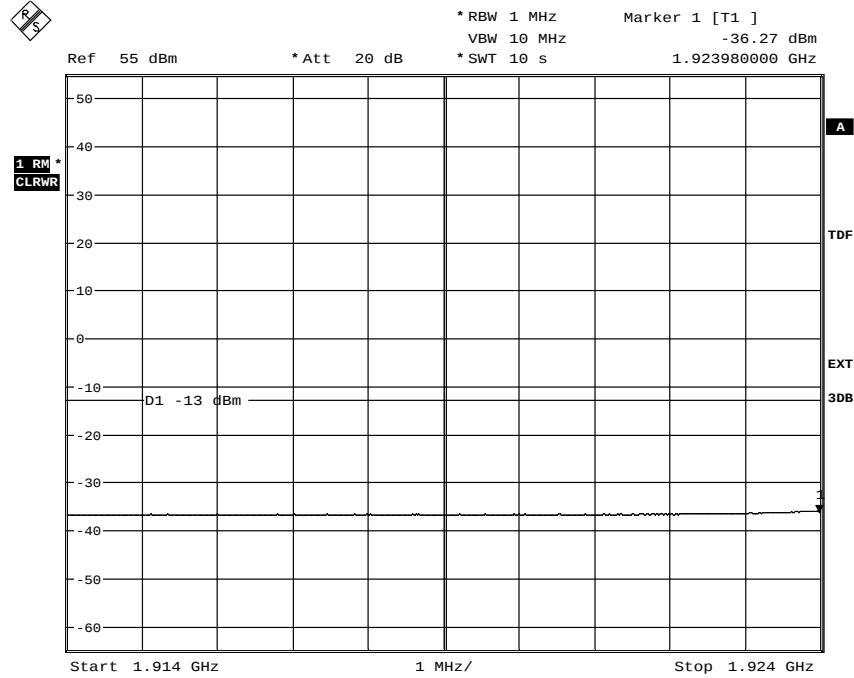


Date: 9.AUG.2012 09:23:09



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461


Appendix 4

Diagram 3 a

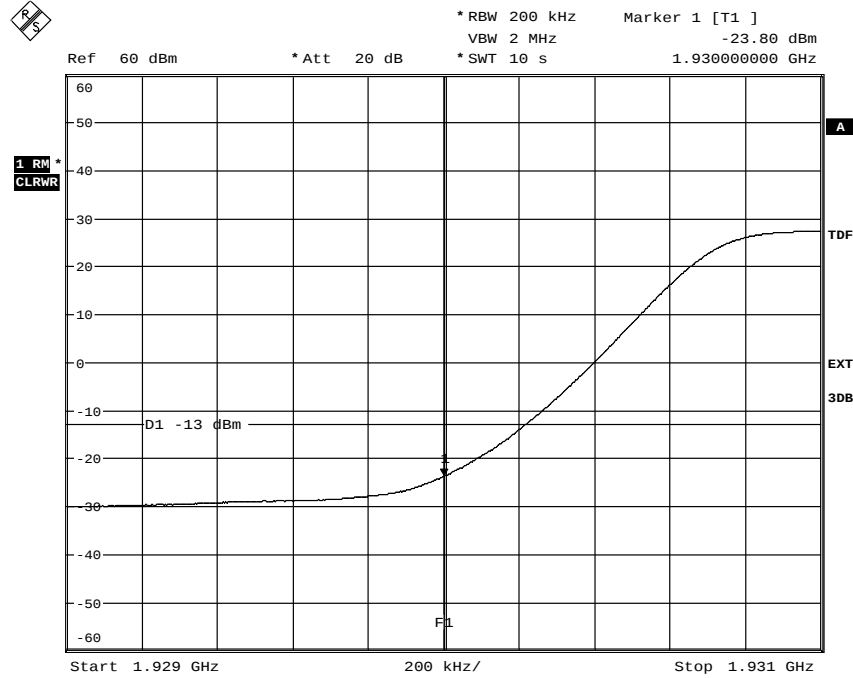

Date: 9.AUG.2012 09:36:11

Diagram 3 b

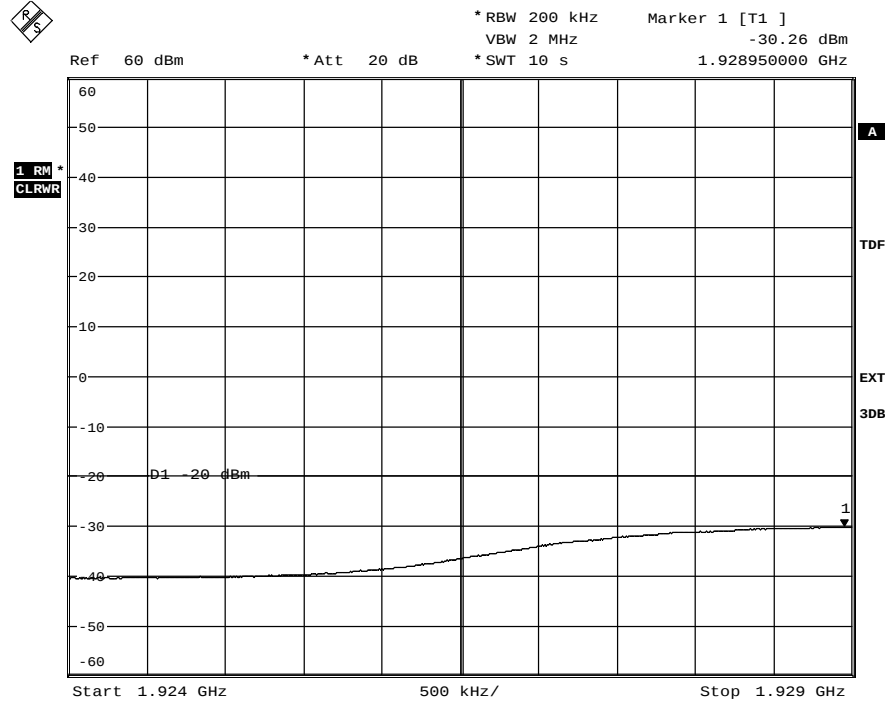


Date: 9.AUG.2012 09:37:05



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 4

Diagram 3 c

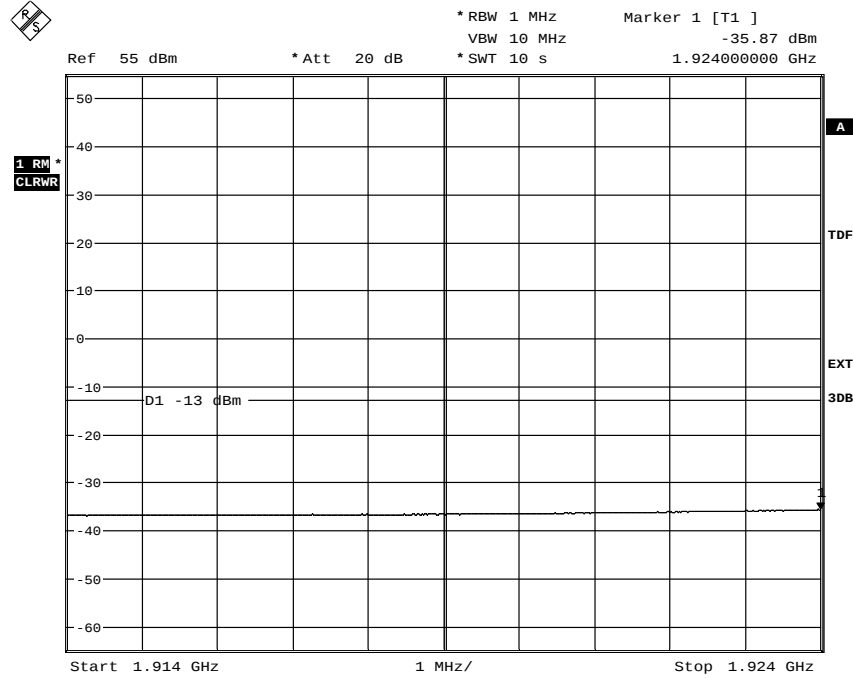


Date: 9.AUG.2012 09:38:35



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461


Appendix 4

Diagram 4 a

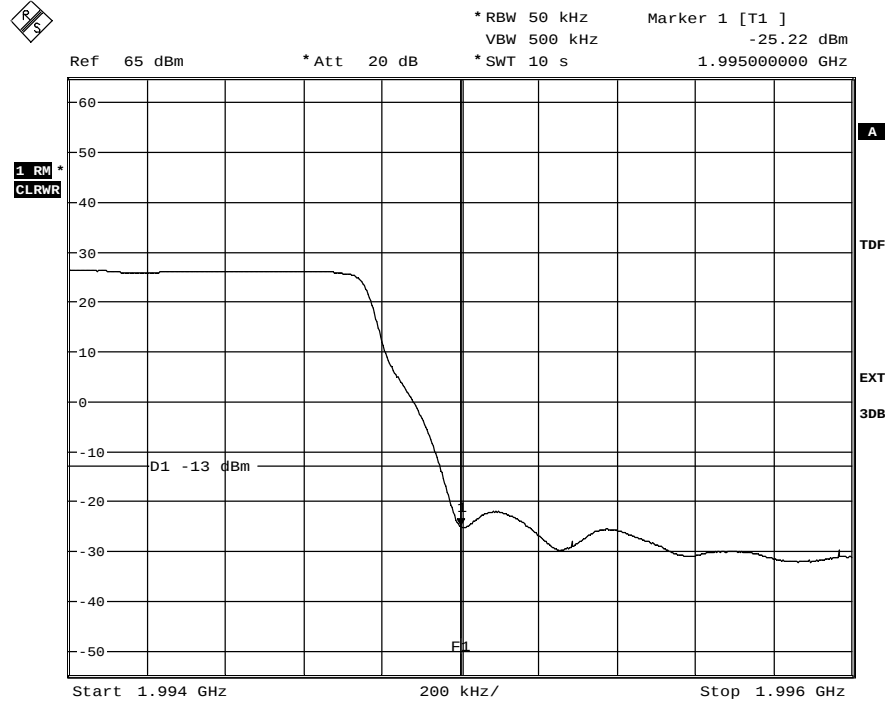

Date: 9.AUG.2012 13:32:58

Diagram 4 b

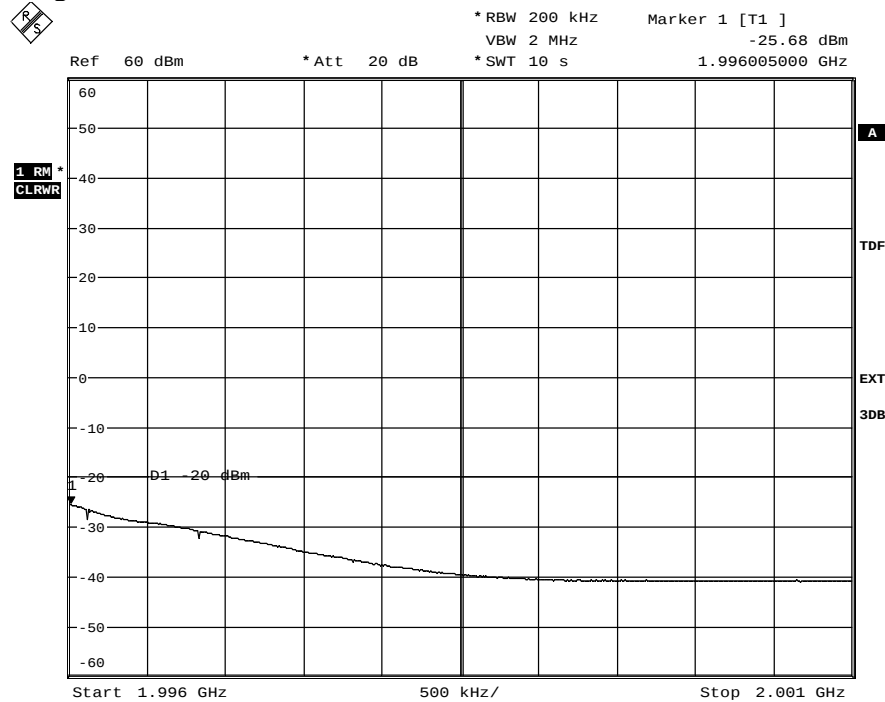


Date: 9.AUG.2012 12:58:36



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461


Appendix 4

Diagram 4 c

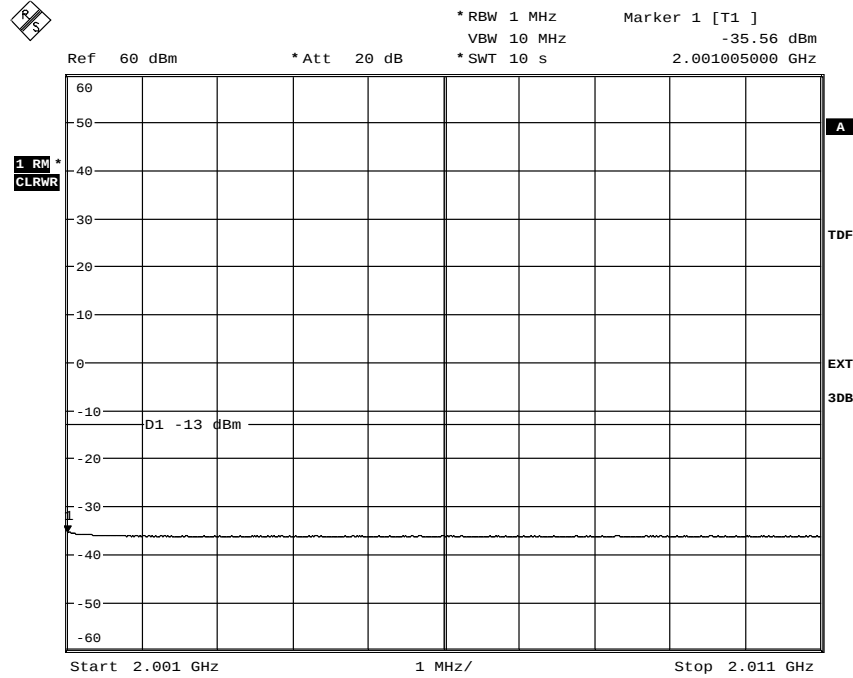


Date: 9.AUG.2012 12:59:38

Diagram 5 a

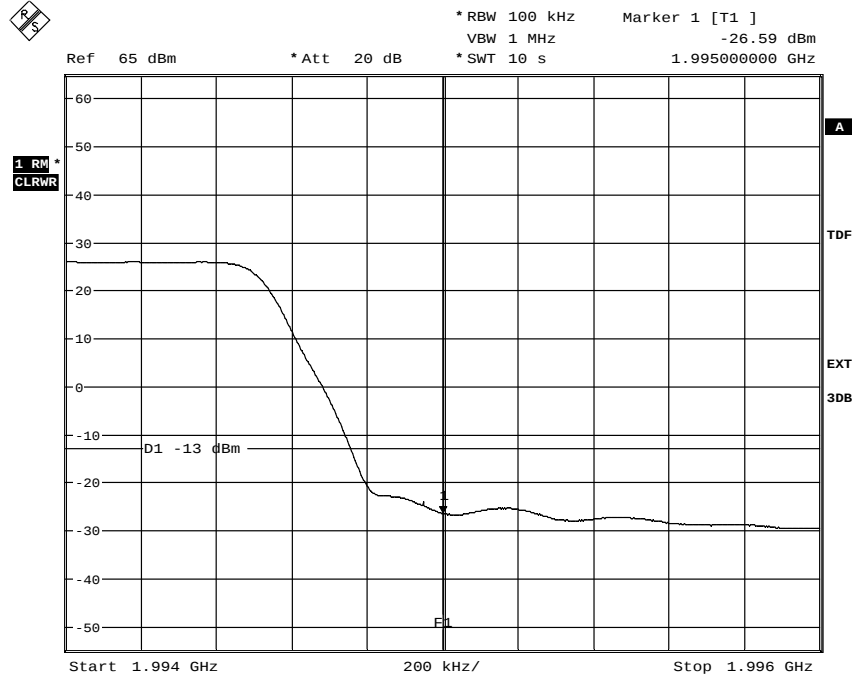

Date: 9.AUG.2012 13:38:30

Diagram 5 b

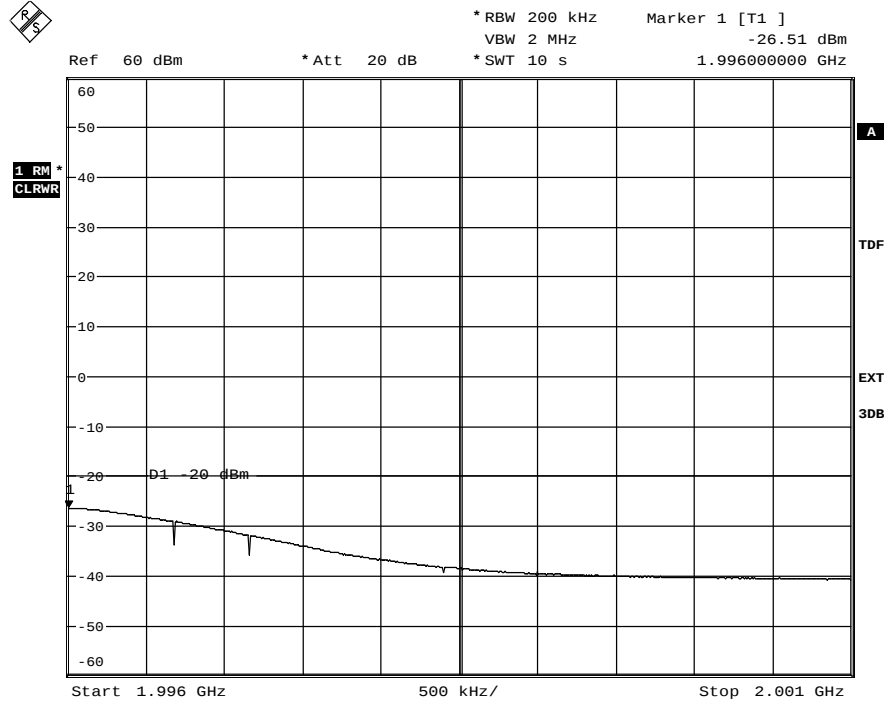


Date: 9.AUG.2012 13:25:19



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461


Appendix 4

Diagram 5 c

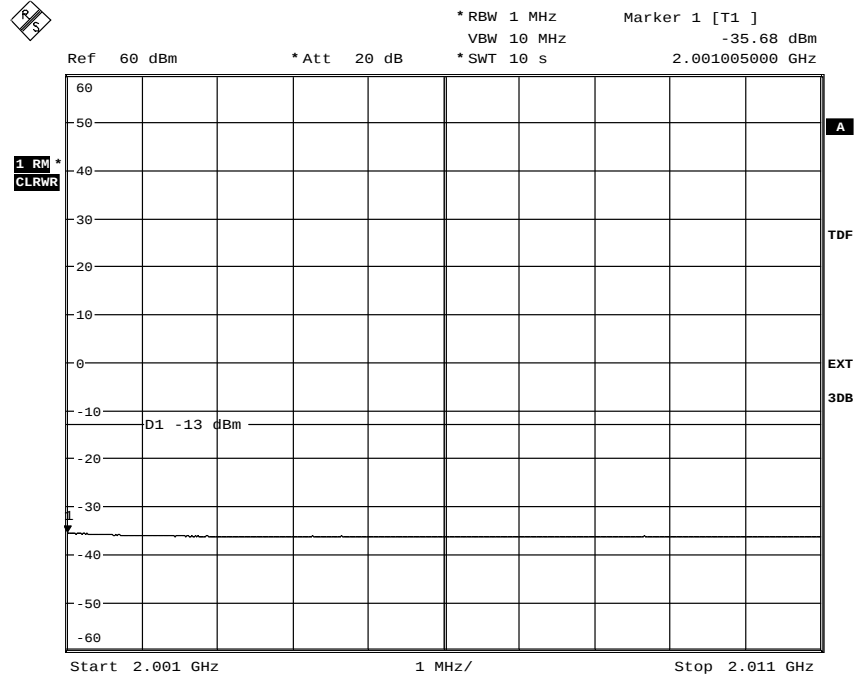


Date: 9.AUG.2012 13:26:06

Diagram 6 a

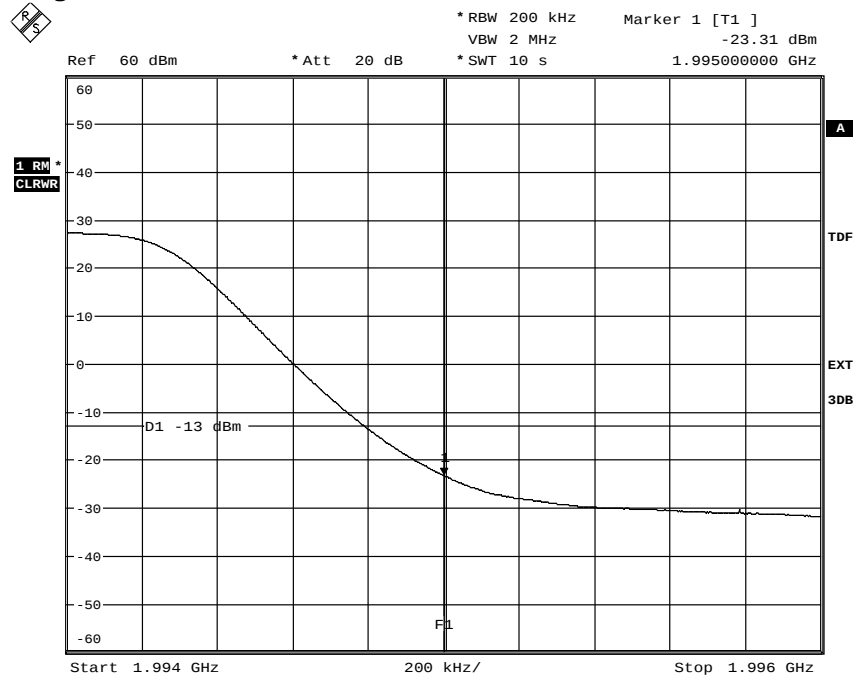

Date: 9.AUG.2012 13:45:03

Diagram 6 b

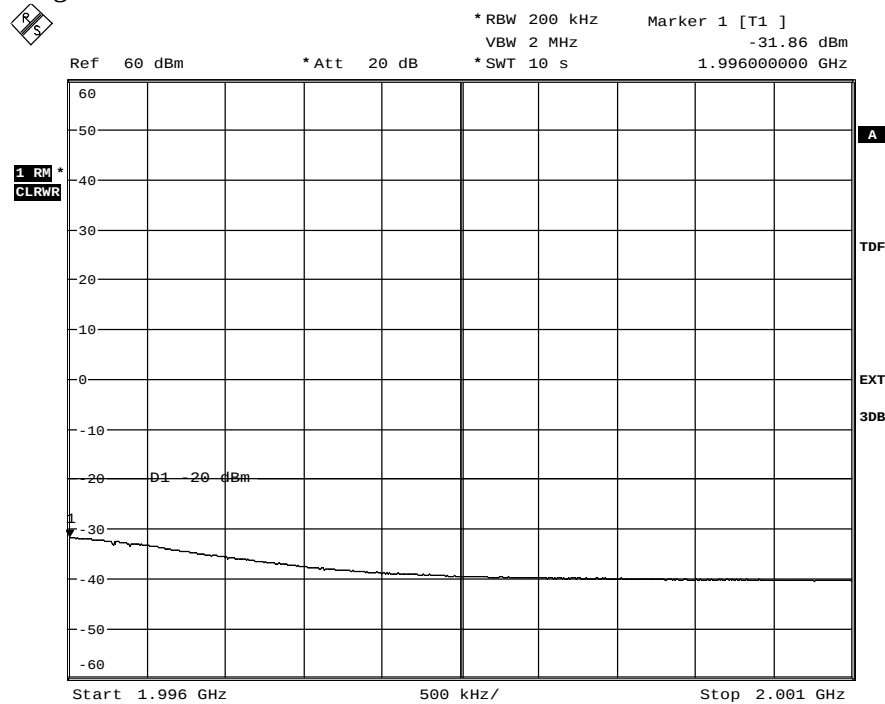


Date: 9.AUG.2012 13:46:38



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 4

Diagram 6 c

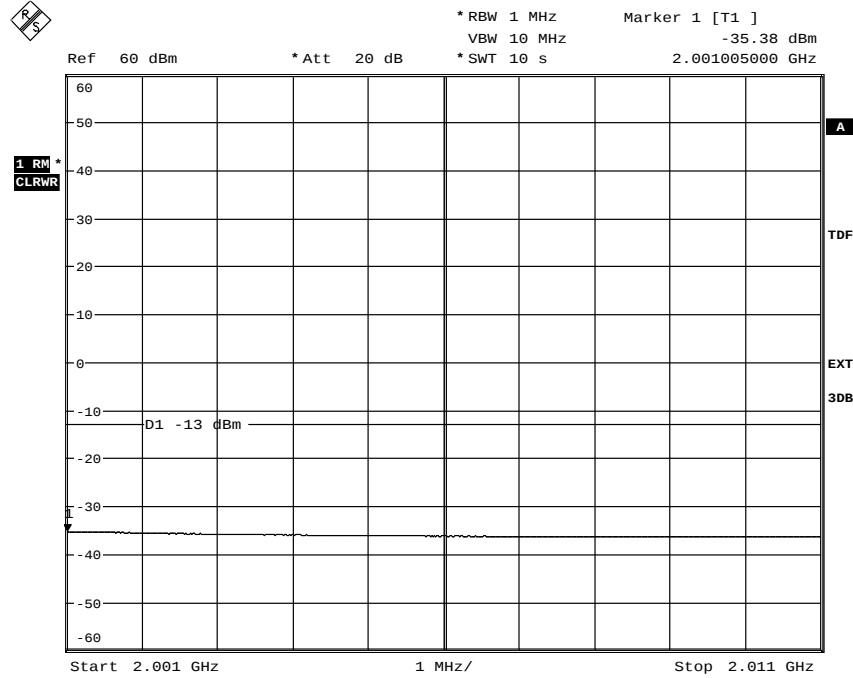

Date: 9.AUG.2012 13:47:22

Conducted spurious emission measurements according to CFR 47 §24.238 / IC RSS-133 6.5

Date	Temperature	Humidity
2012-08-09	21 °C ± 3 °C	47 % ± 5 %
2012-08-14	20 °C ± 3 °C	50 % ± 5 %
2012-08-15	20 °C ± 3 °C	48 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §24.238. The output was connected to a spectrum analyzer with a RBW setting of 1 MHz and RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
RF attenuator	900 233
RF attenuator	901 374
HP filter	901 502
Rhode & Schwarz FSQ 40	504 143
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

LTE

Diagram	BW configuration / [MHz]	Tested frequency
1 a-d	10	B
2 a-d	15	B
3 a-d	5	M
4 a-d	10	M
5 a-d	15	M
6 a-d	10	T
7 a-d	15	T

LTE+CDMA

Diagram	Configuration
8 a-e	1
9 a-d	2
10 a-e	3



Remark

The emission at 9 kHz on some plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

The highest internal frequency as declared by the client was 2.4576 GHz, thus the choice of the upper frequency boundary was set to $10 \times 2.5 \text{ GHz} = 25 \text{ GHz}$ for emission measurements.


Limits

§24.238 and RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P) \text{ dB}$, resulting in a limit of -13 dBm per 1 MHz RBW.


Complies?	Yes
-----------	-----

Diagram 1a:

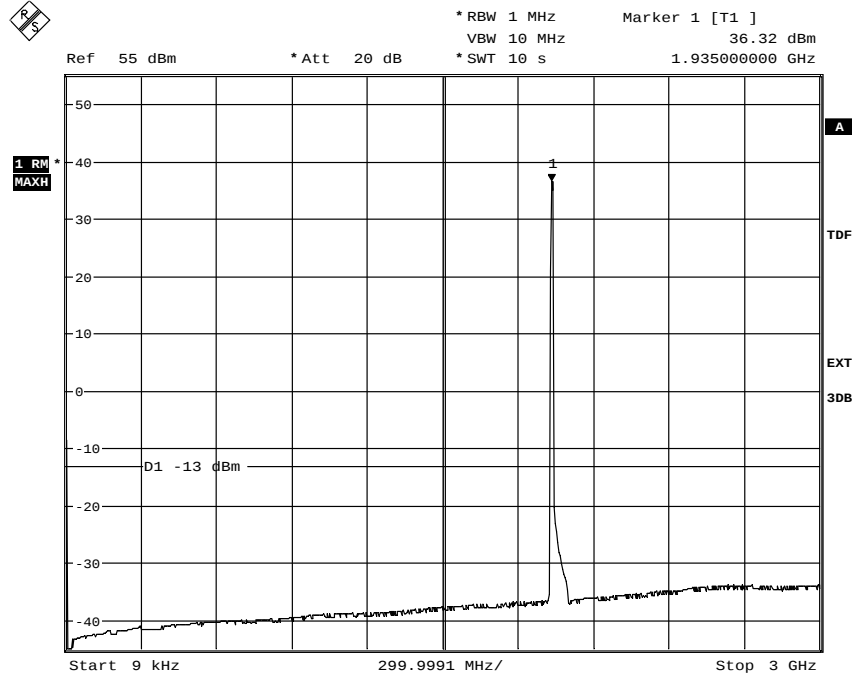


Date: 15.AUG.2012 11:15:34

Diagram 1b:

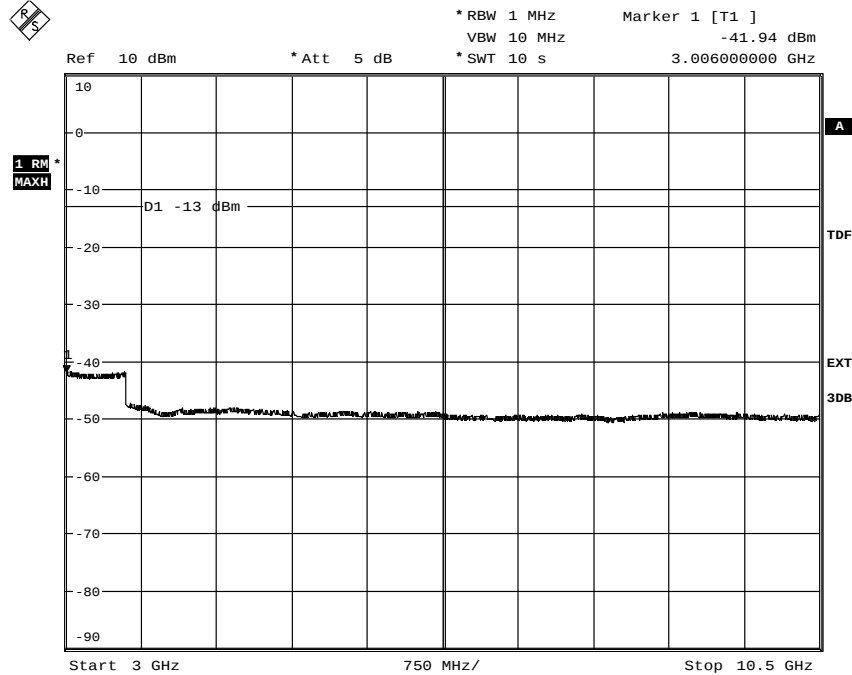


Date: 15.AUG.2012 11:22:40

Diagram 1c:

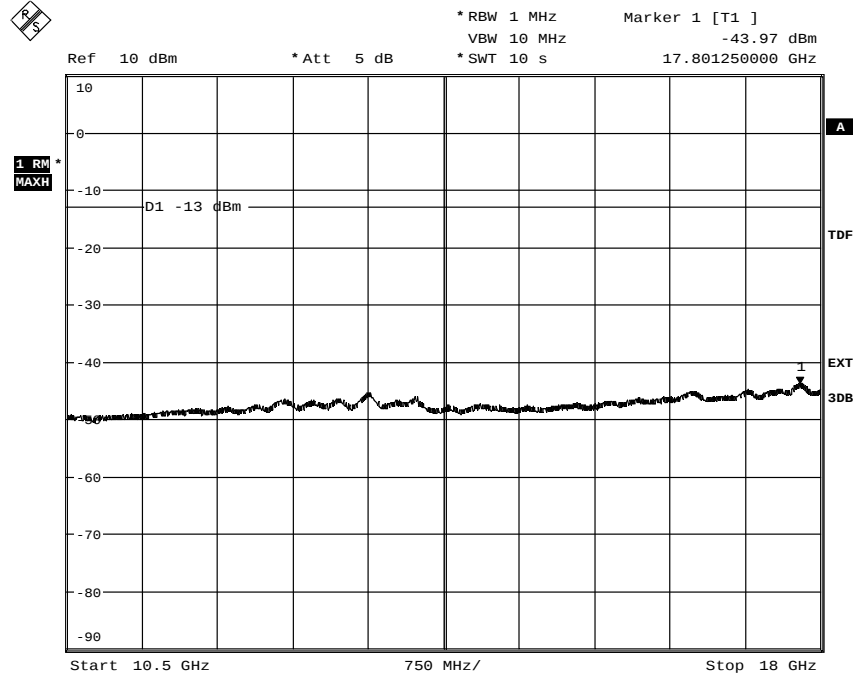


Date: 15.AUG.2012 11:24:48

Diagram 1d:

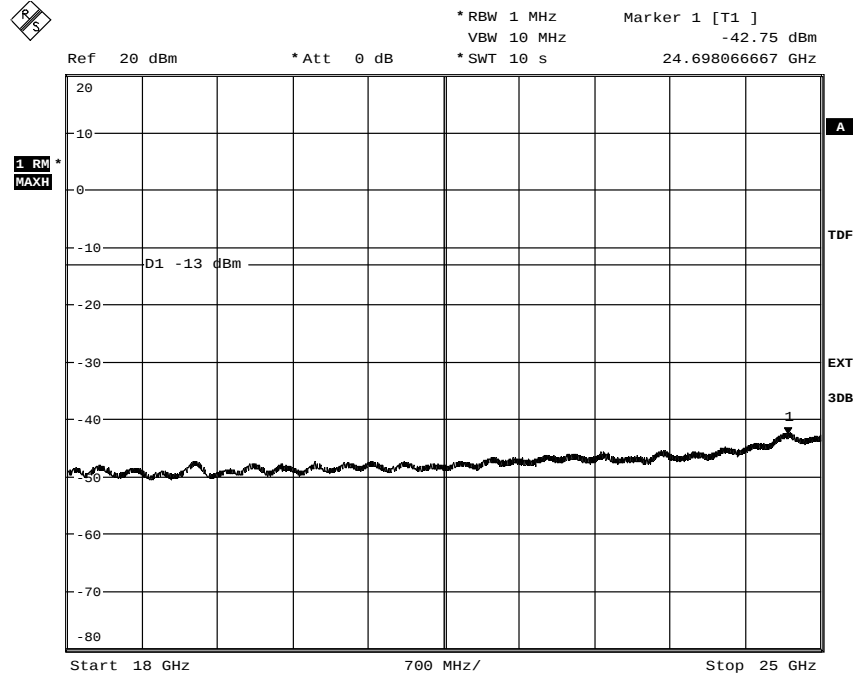


Date: 15.AUG.2012 11:26:03

Diagram 2a:

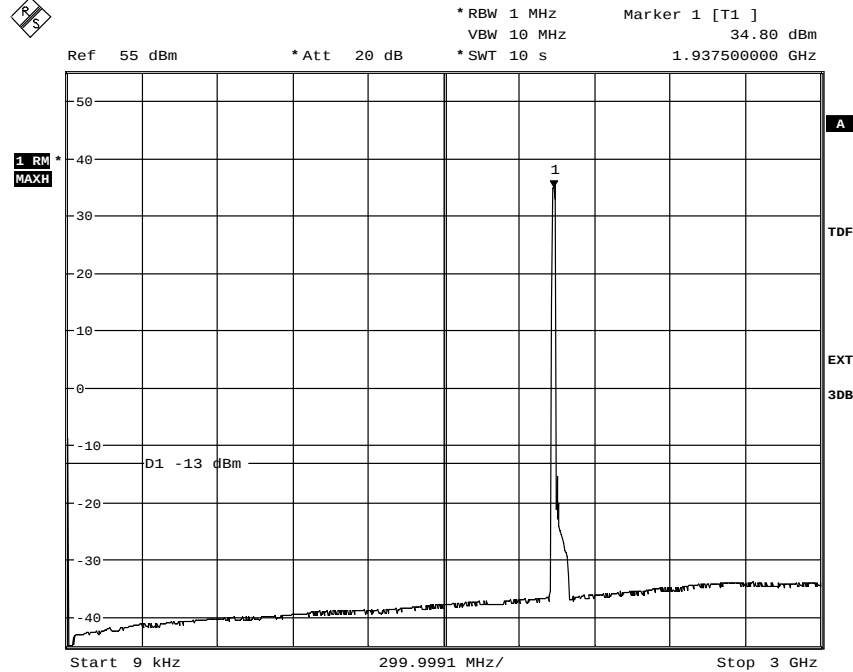


Date: 15.AUG.2012 12:59:03

Diagram 2b:

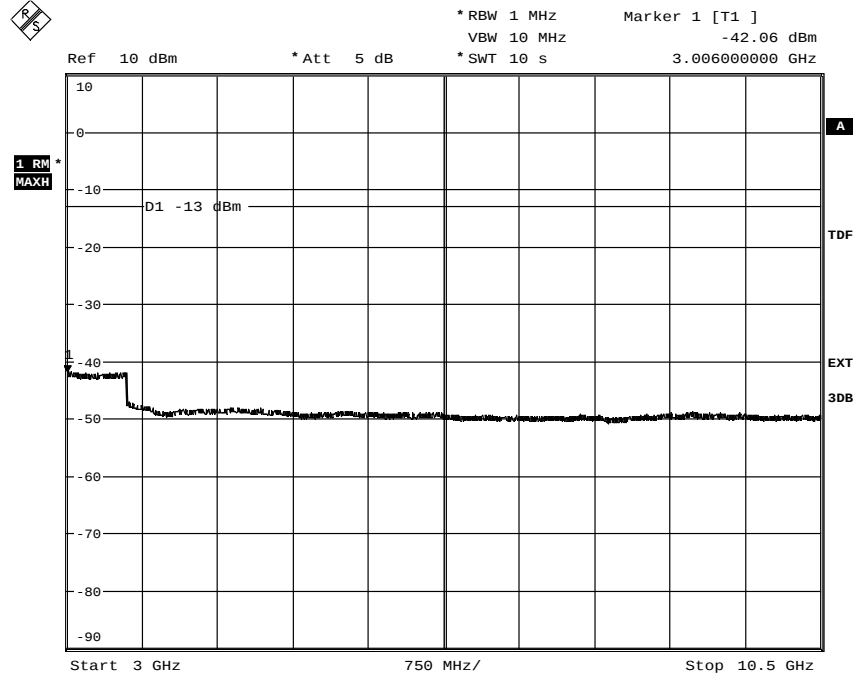


Date: 15.AUG.2012 13:00:45

Diagram 2c:

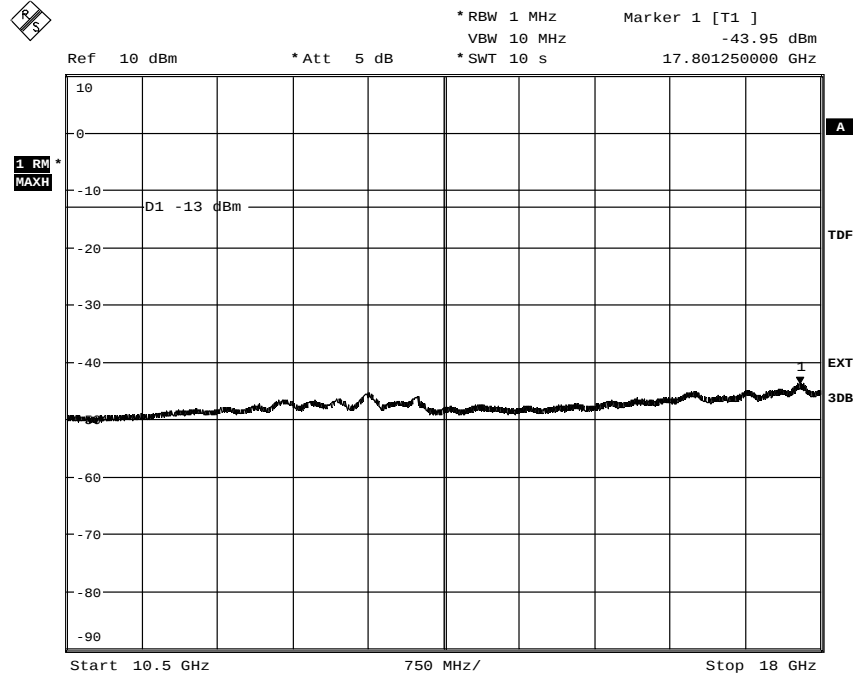


Date: 15.AUG.2012 13:01:48

Diagram 2d:

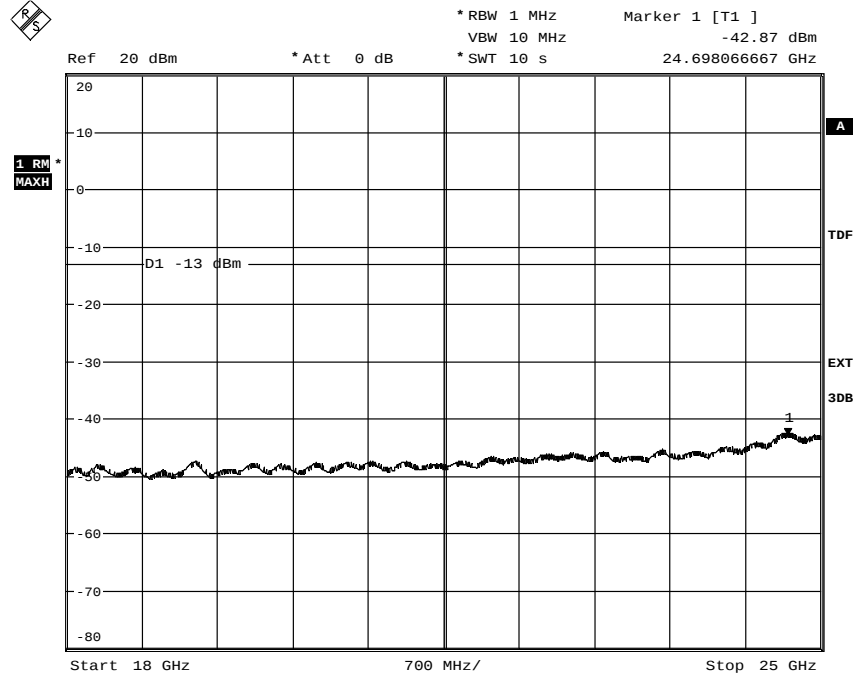


Date: 15.AUG.2012 13:03:02

Diagram 3a:

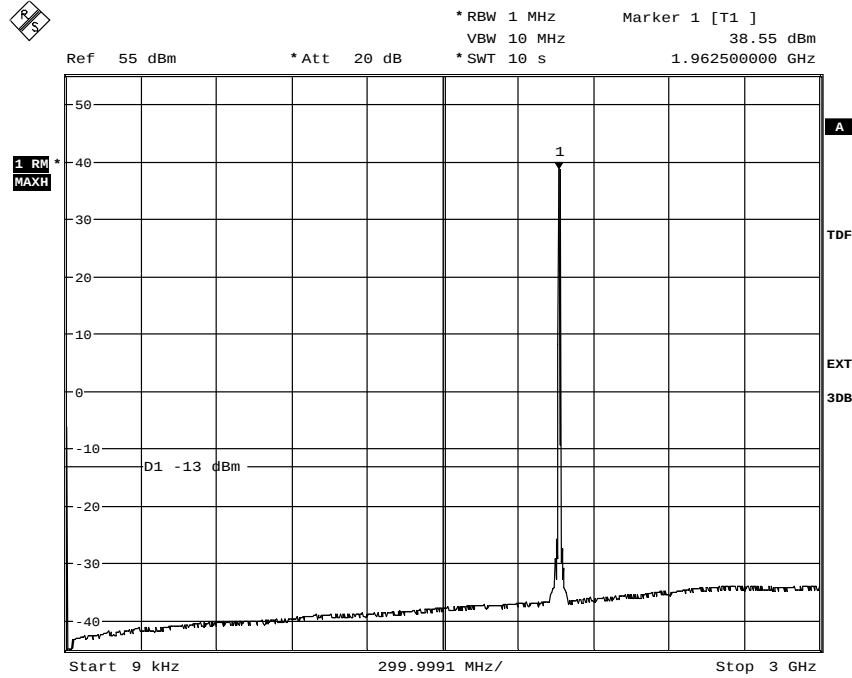


Date: 9.AUG.2012 14:45:42

Diagram 3b:

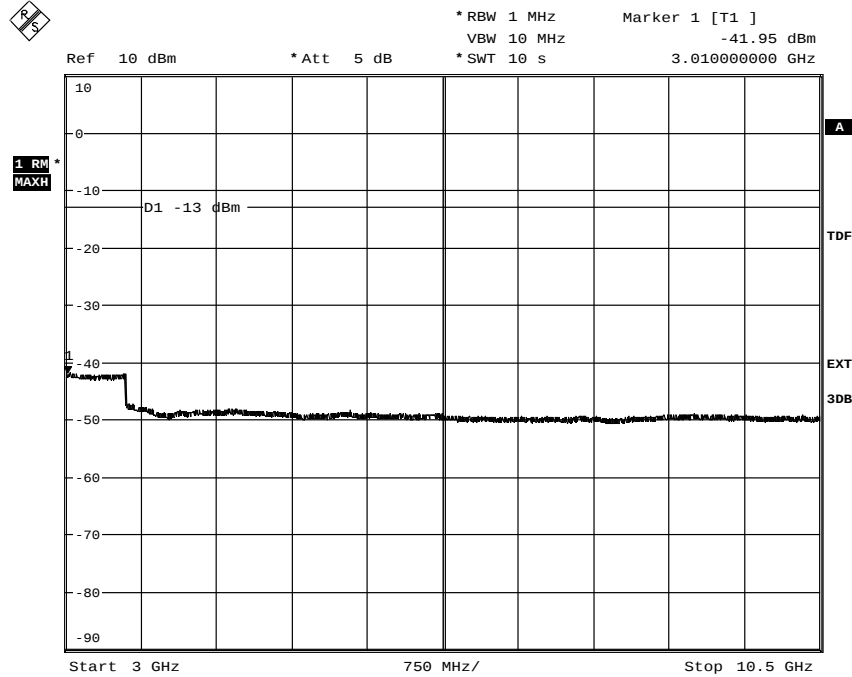


Date: 9.AUG.2012 14:50:52

Diagram 3c:

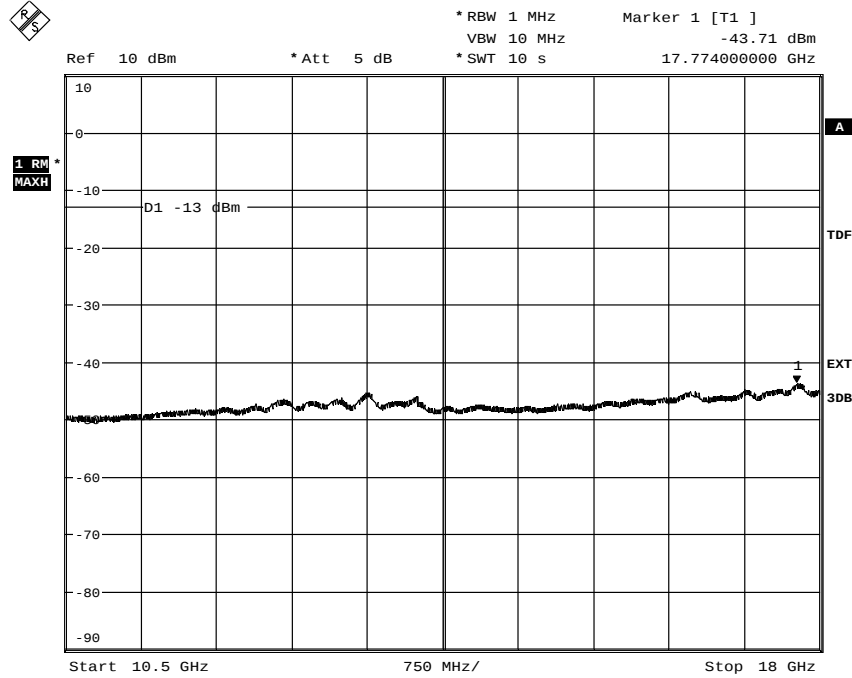


Date: 9.AUG.2012 14:51:47

Diagram 3d:

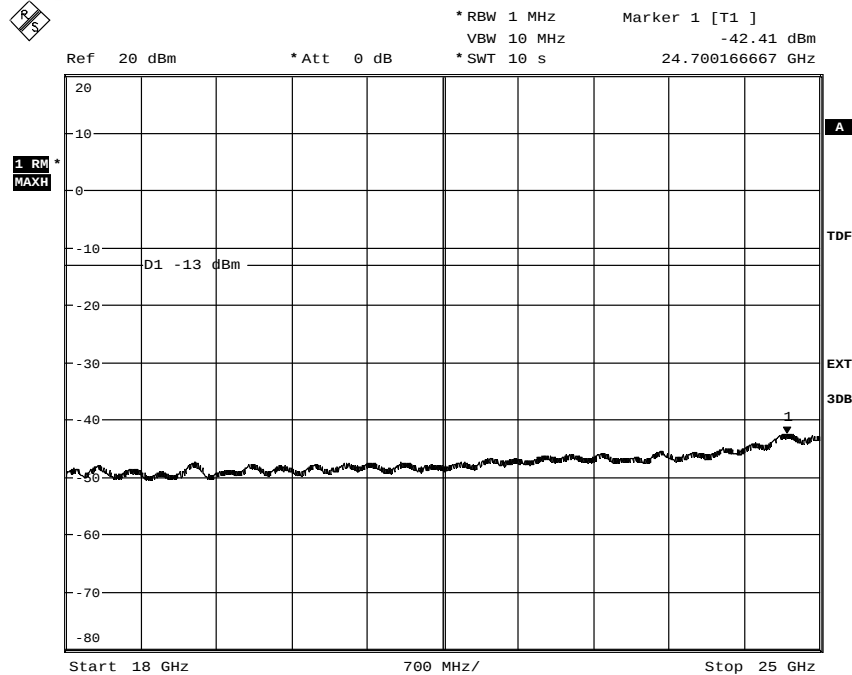


Date: 9.AUG.2012 14:52:44

Diagram 4a:

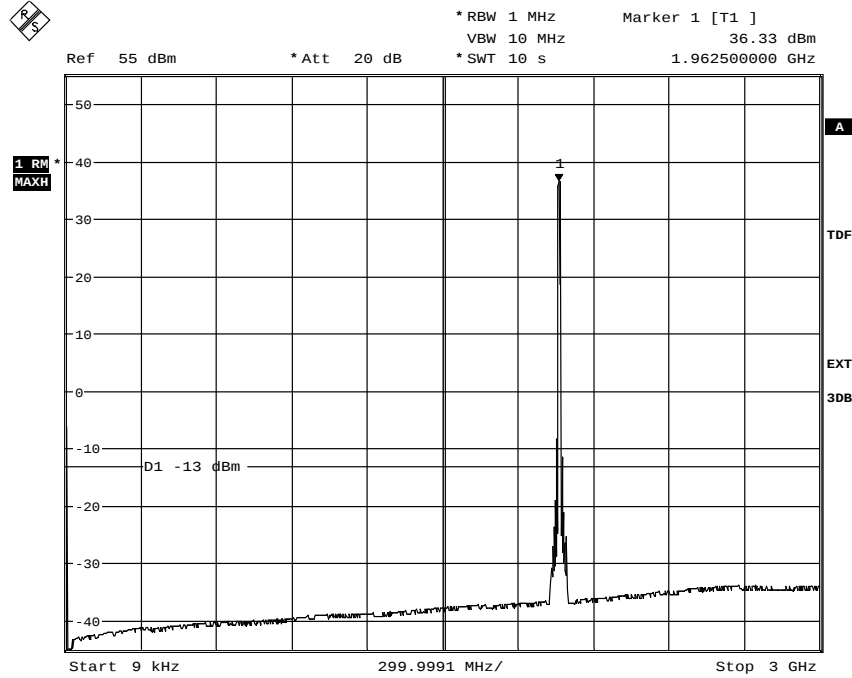


Date: 9.AUG.2012 14:27:47

Diagram 4b:

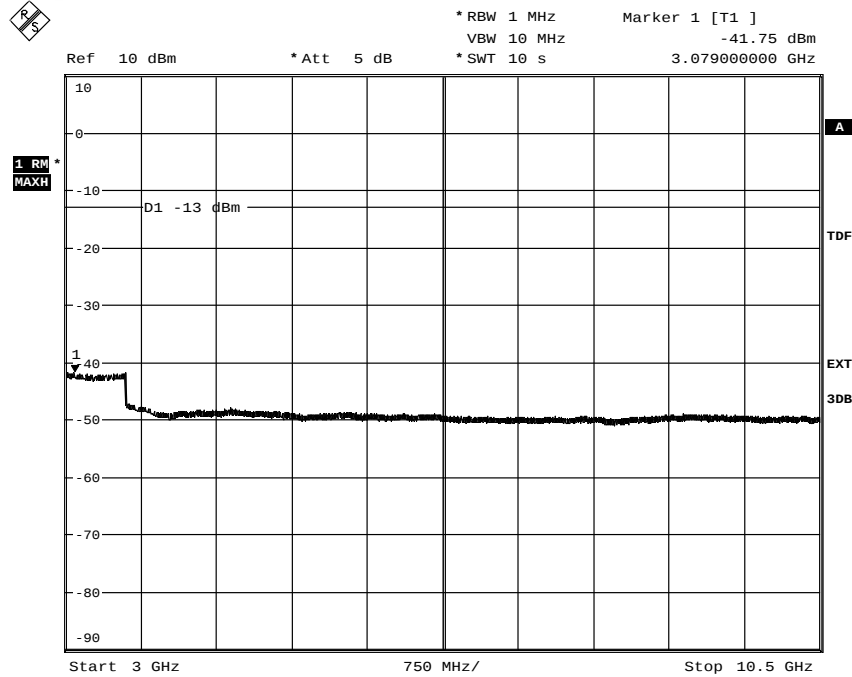


Date: 9.AUG.2012 14:31:34

Diagram 4c:

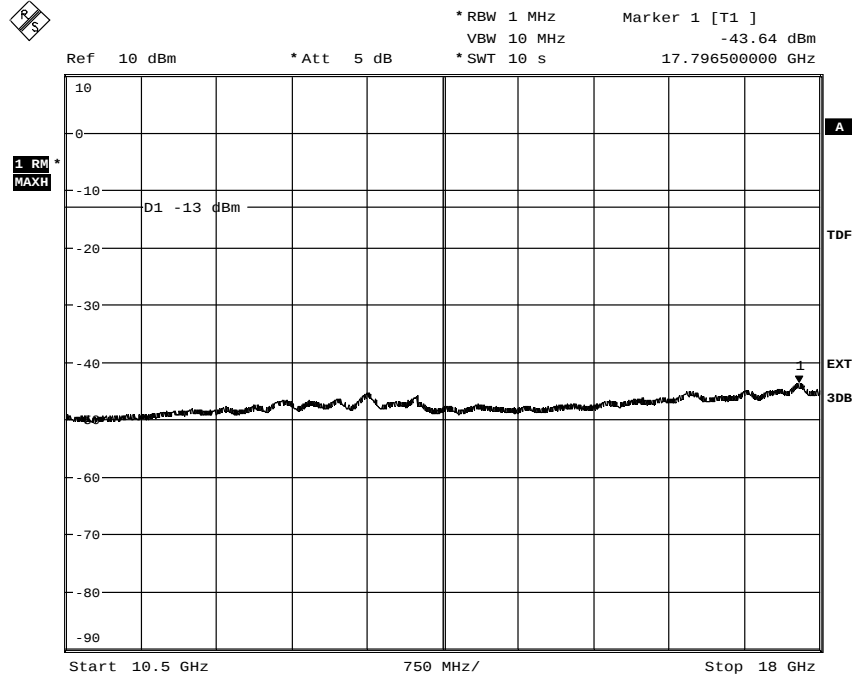


Date: 9.AUG.2012 14:32:31

Diagram 4d:

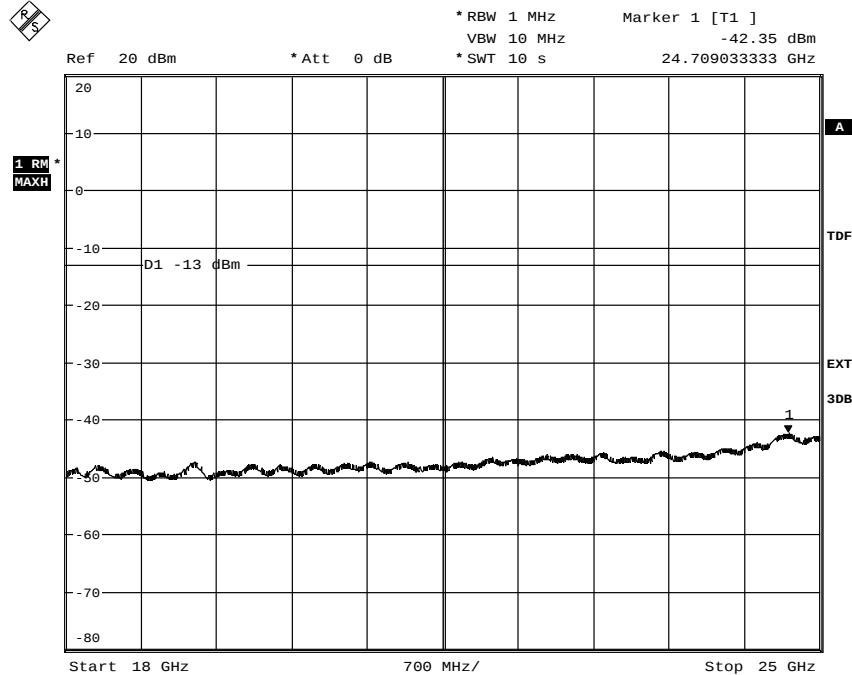


Date: 9.AUG.2012 14:33:22

Diagram 5a:

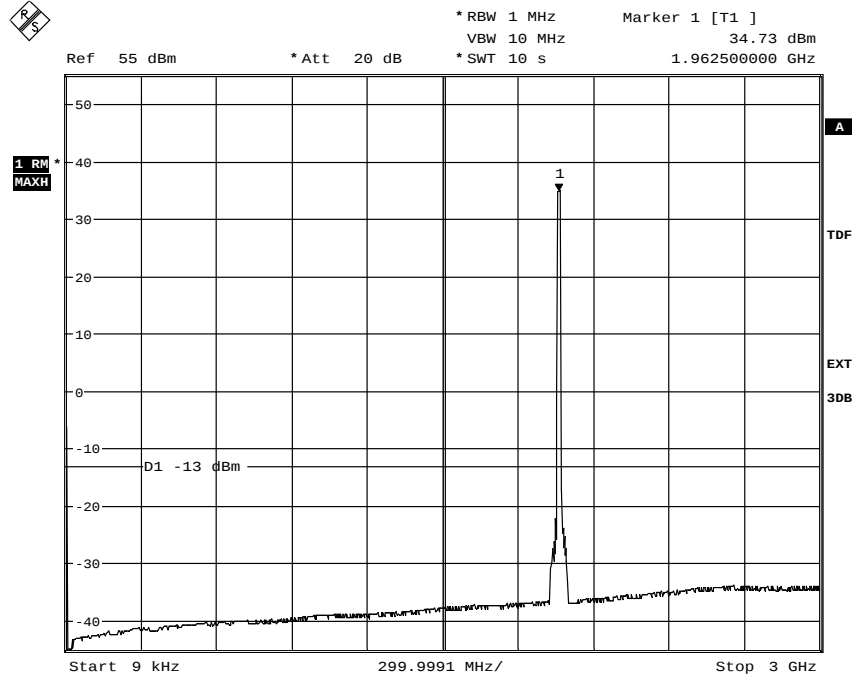

Date: 9.AUG.2012 13:59:50

Diagram 5b:

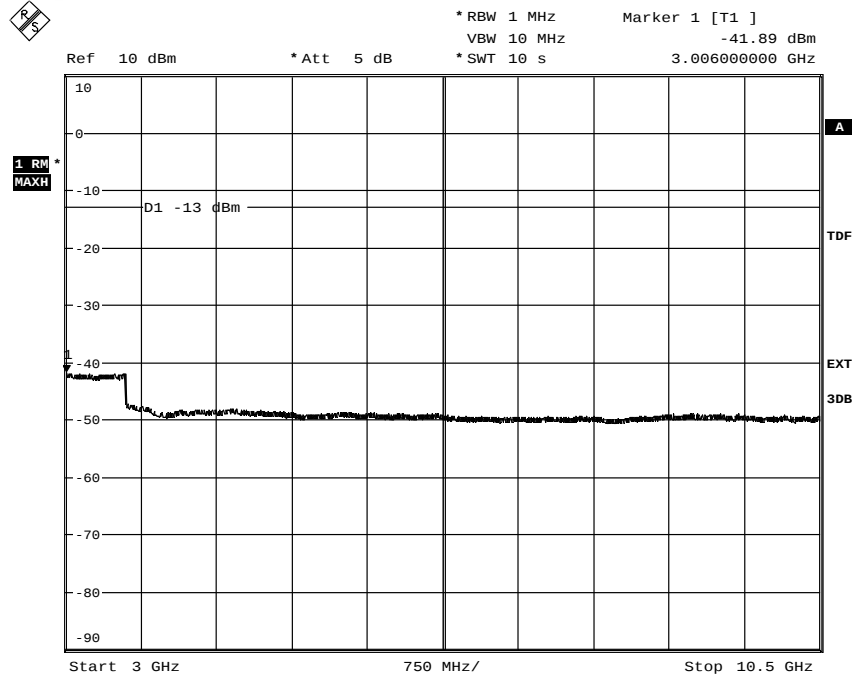


Date: 9.AUG.2012 14:01:09



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461


Appendix 5

Diagram 5c:

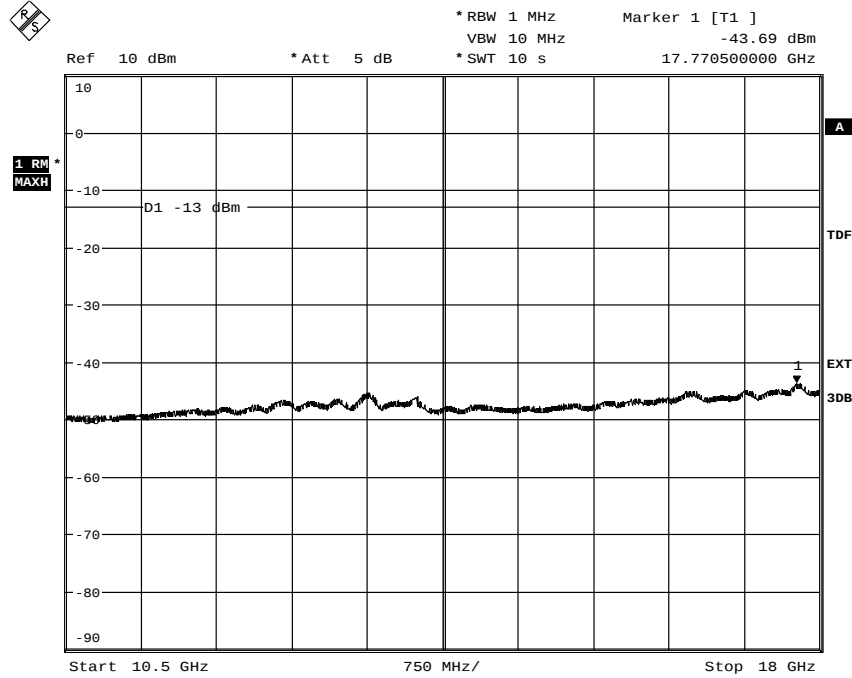


Date: 9.AUG.2012 14:02:31

Diagram 5d:

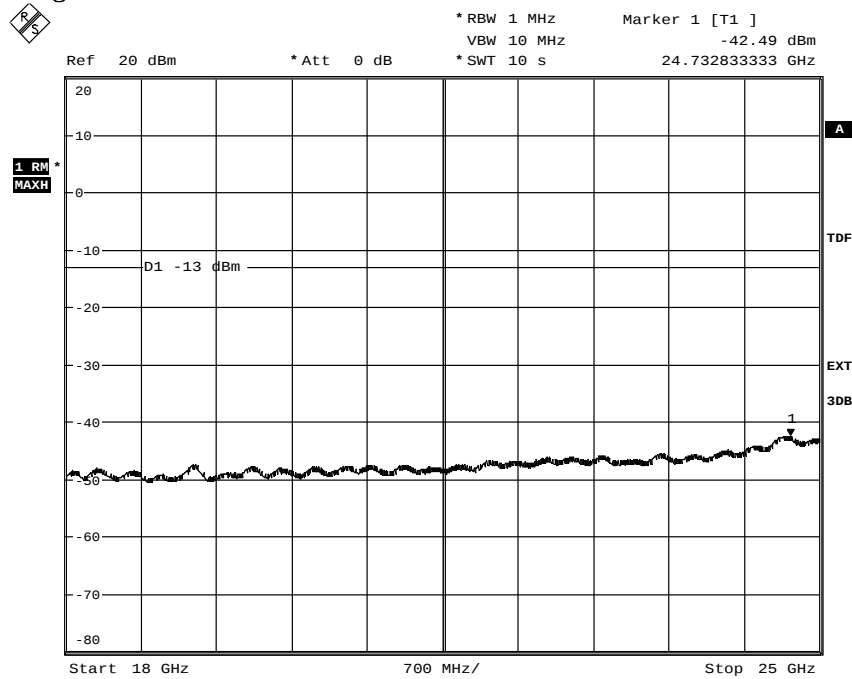


Date: 9.AUG.2012 14:03:32

Diagram 6a:

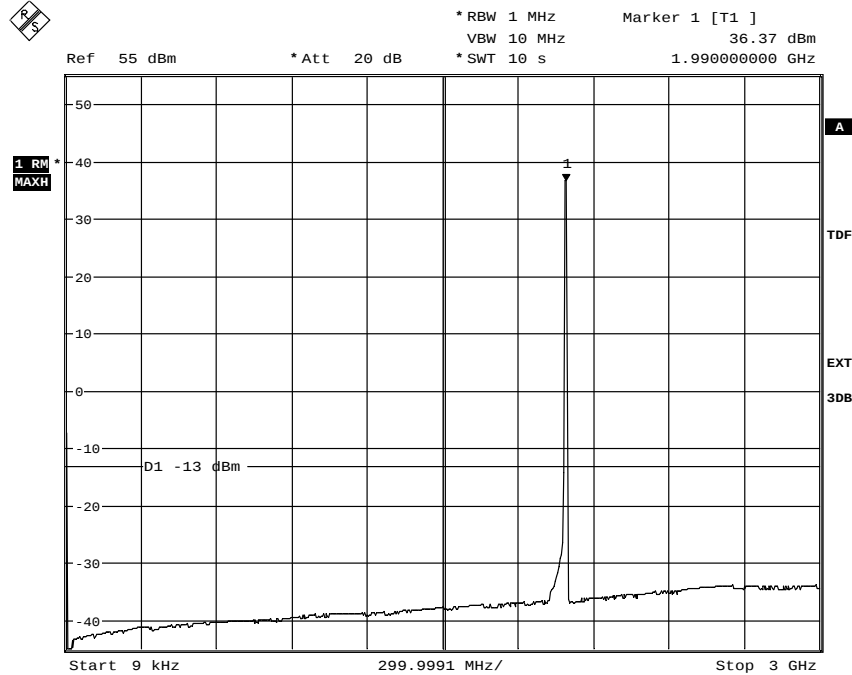


Date: 15.AUG.2012 12:34:52

Diagram 6b:

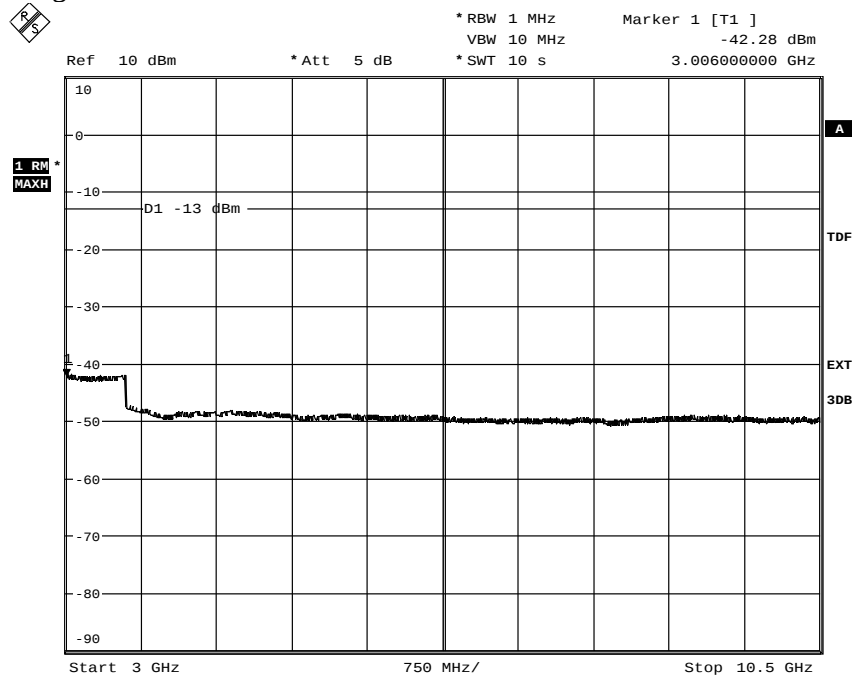


Date: 15.AUG.2012 12:36:28

Diagram 6c:

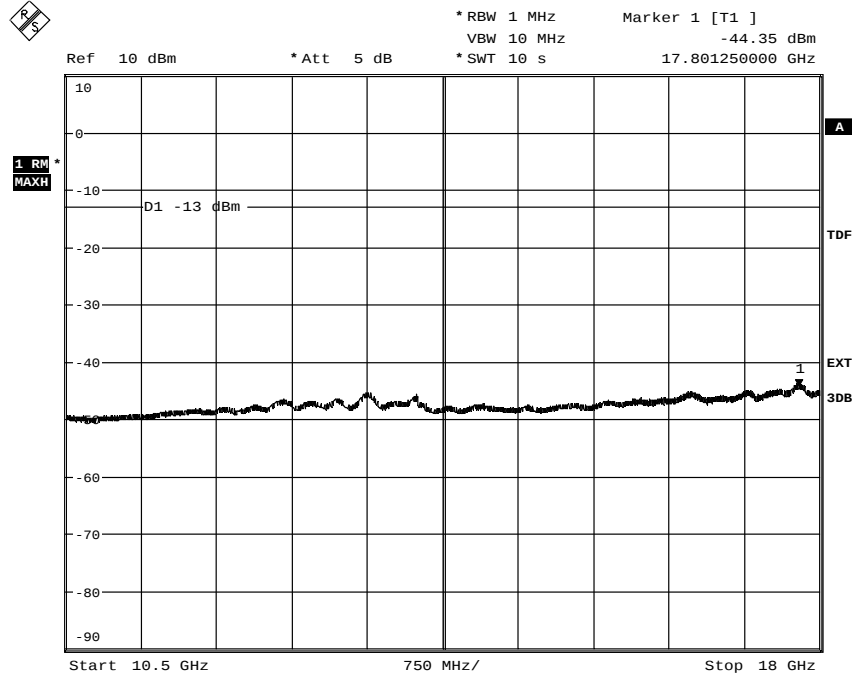


Date: 15.AUG.2012 12:37:34

Diagram 6d:

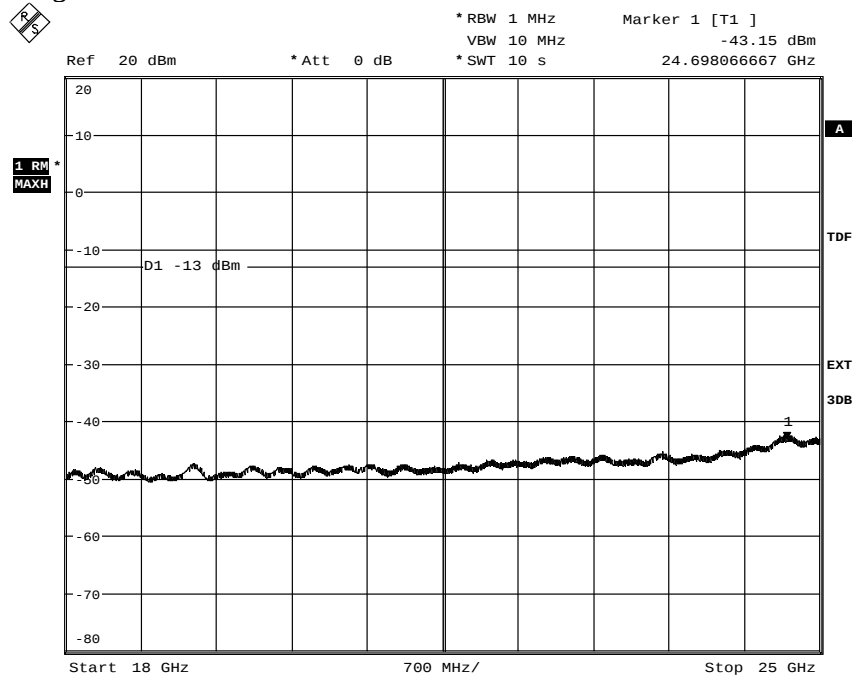


Date: 15.AUG.2012 12:38:22

Diagram 7a:

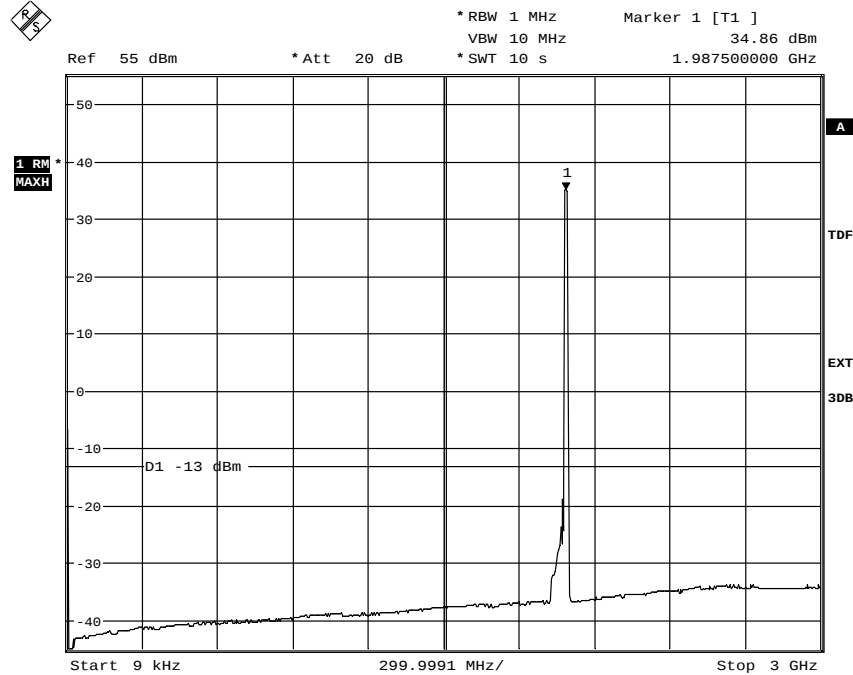


Date: 15.AUG.2012 13:17:44

Diagram 7b:

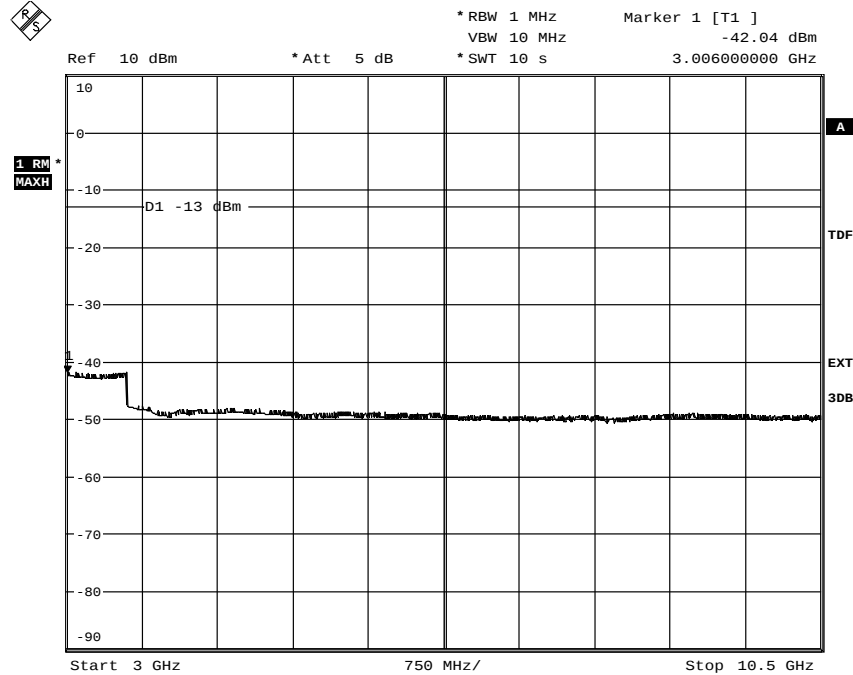


Date: 15.AUG.2012 13:15:44

Diagram 7c:

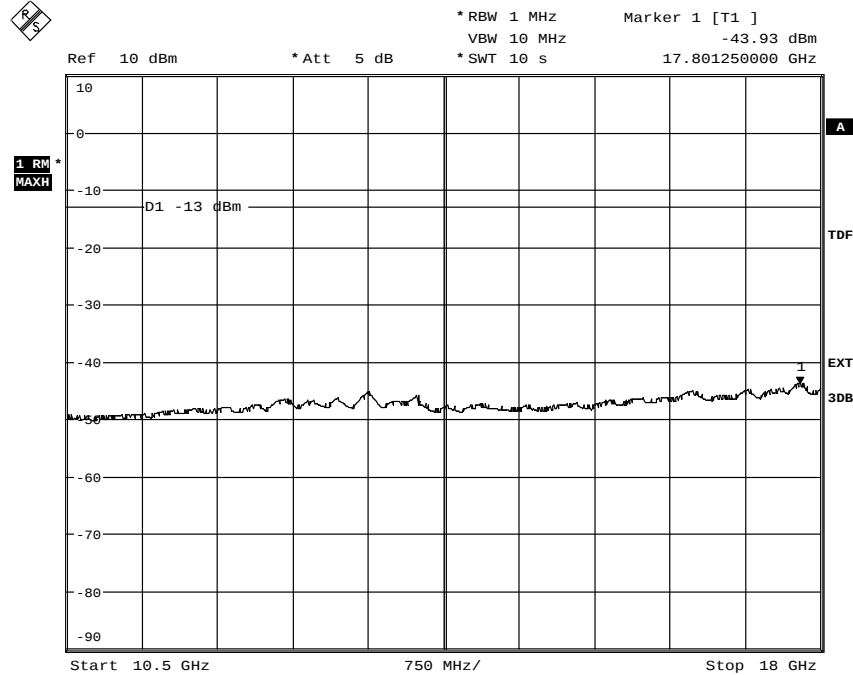


Date: 15.AUG.2012 13:13:45

Diagram 7d:

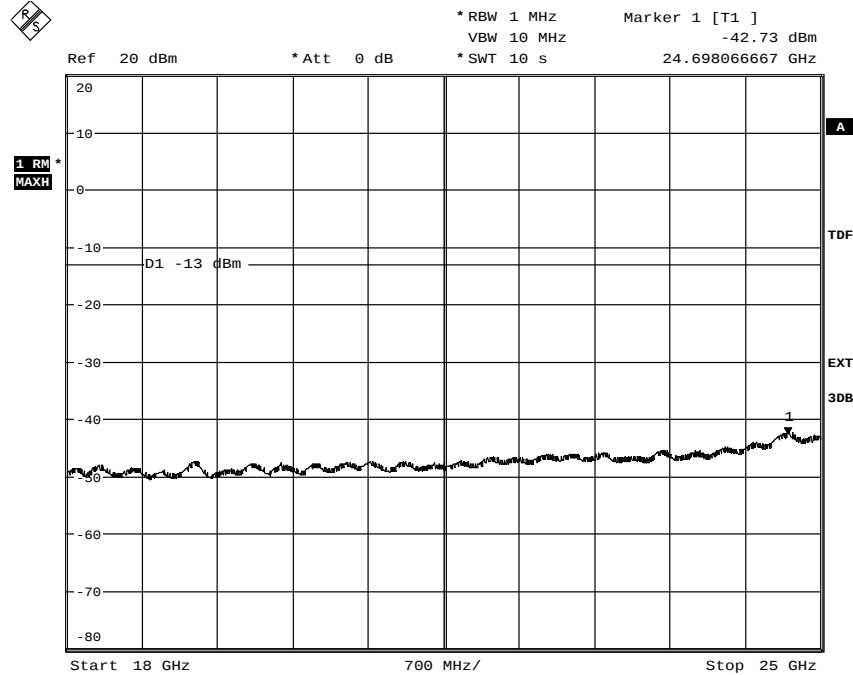


Date: 15.AUG.2012 13:11:10

Diagram 8a:

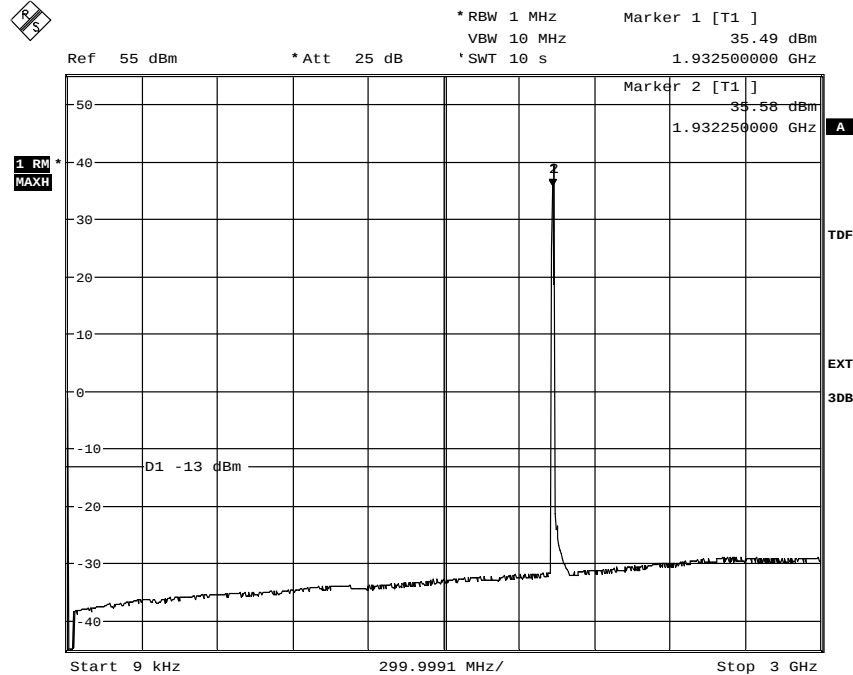


Date: 14.AUG.2012 13:47:46

Diagram 8b:

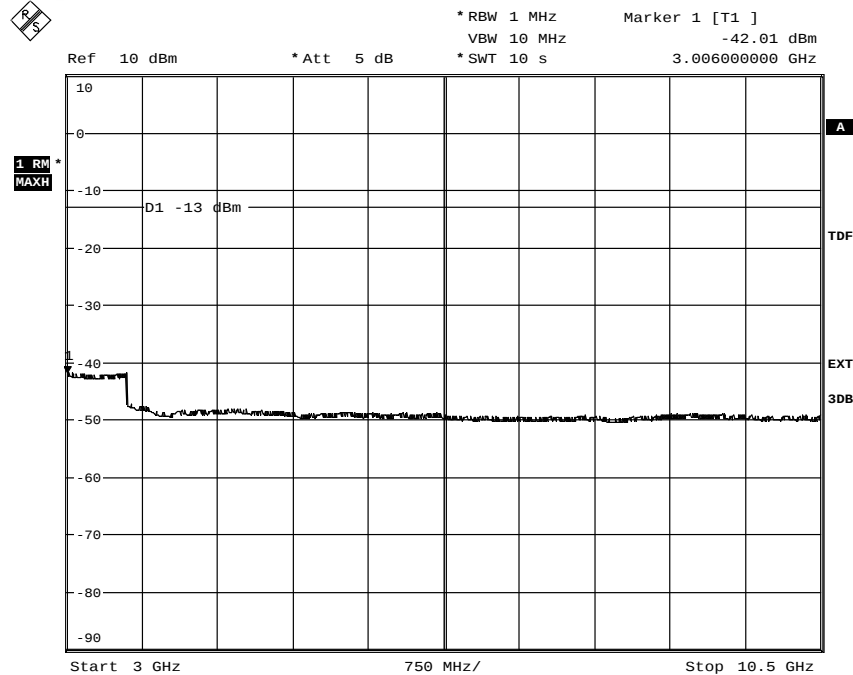


Date: 14.AUG.2012 13:56:02

Diagram 8c:

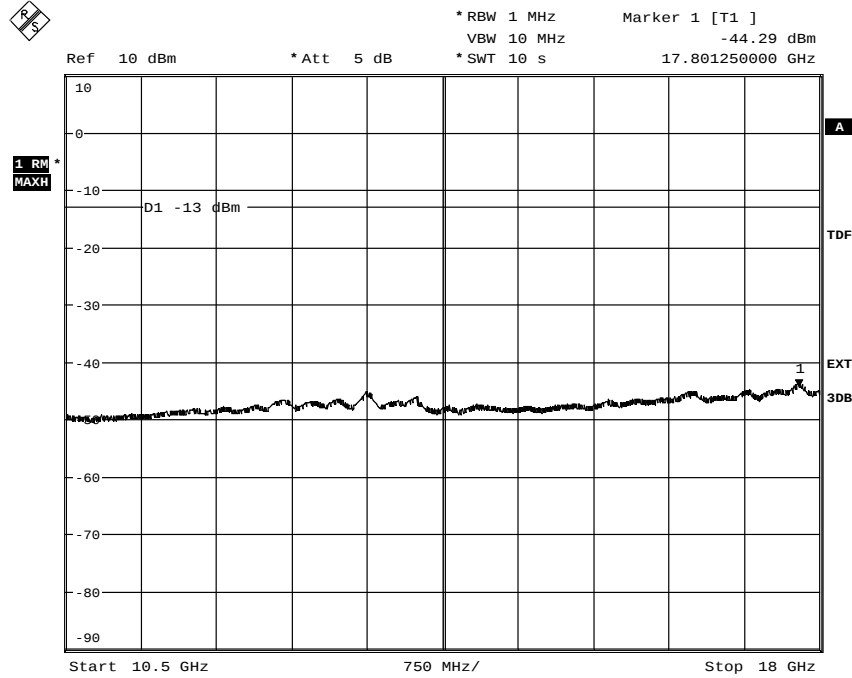


Date: 14.AUG.2012 13:57:36

Diagram 8d:

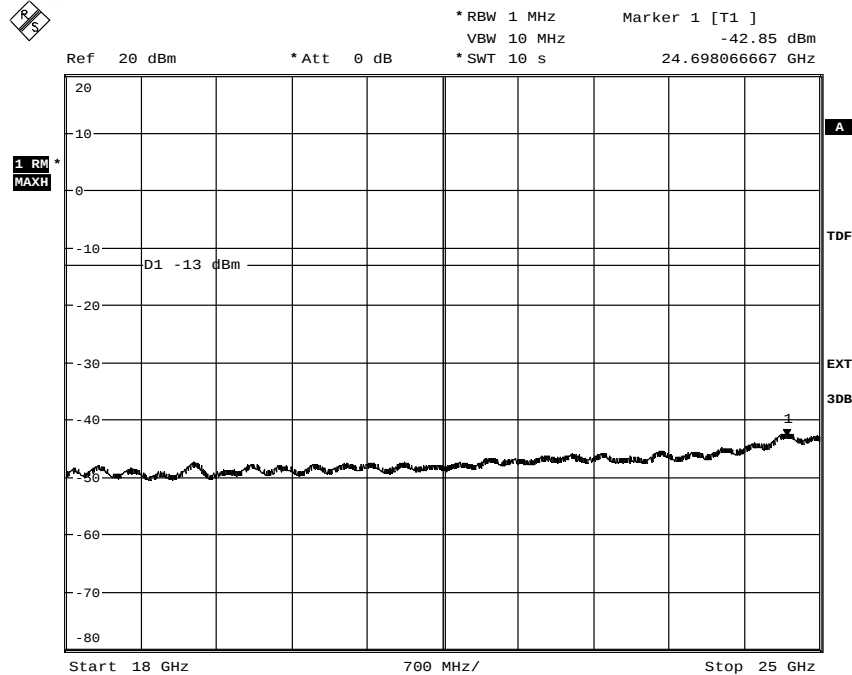

Date: 14.AUG.2012 13:58:28


Diagram 8e:

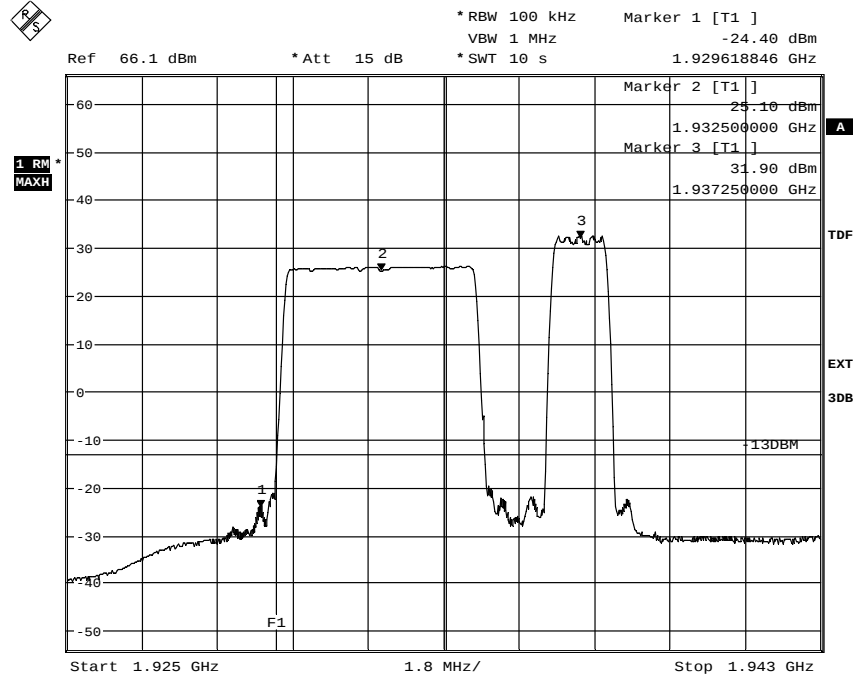

Date: 14.AUG.2012 13:38:41


Note: measurement results should be compared against a limit of -23 dBm.

Diagram 9a:

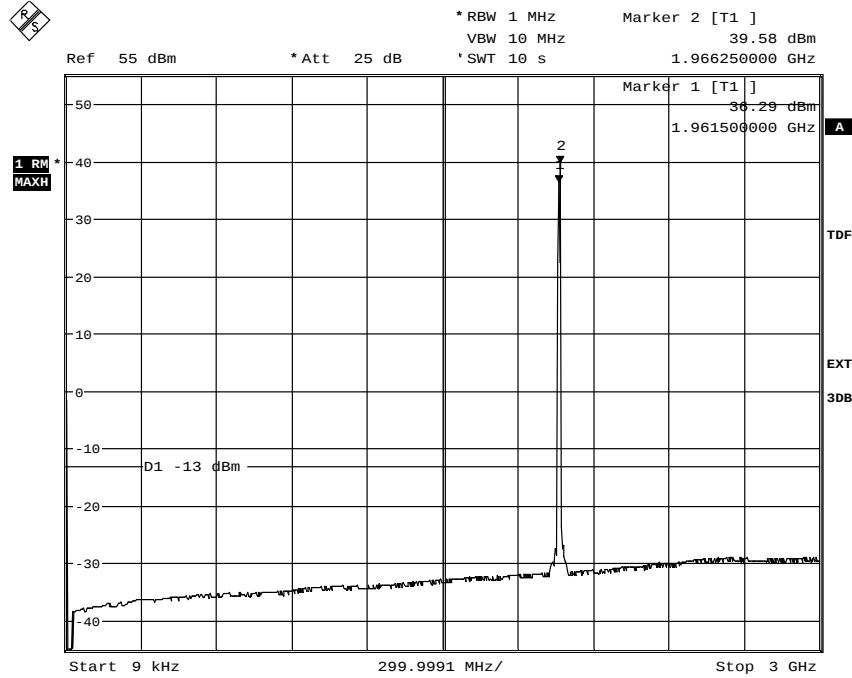

Date: 14.AUG.2012 15:04:37

Diagram 9b:

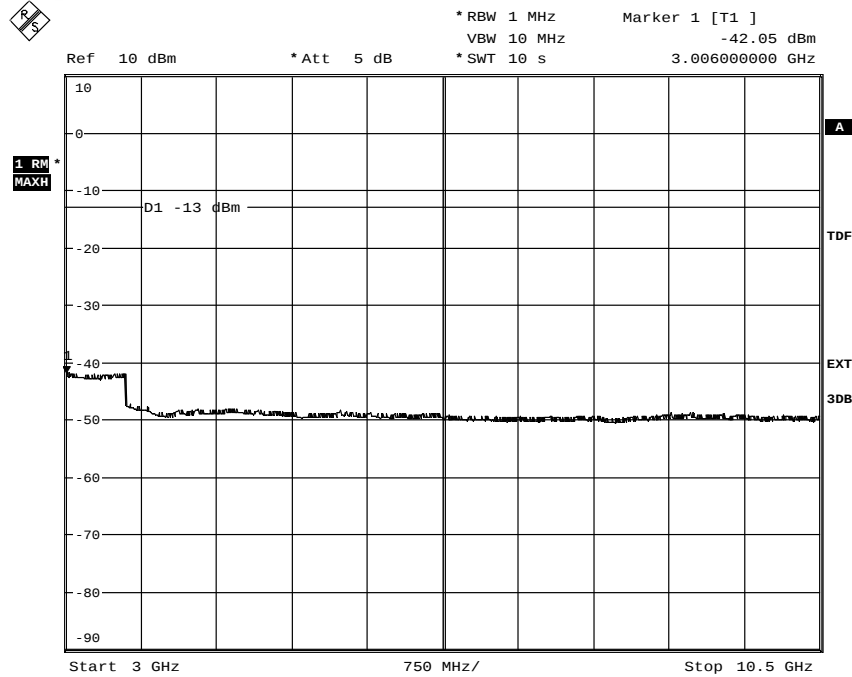


Date: 14.AUG.2012 15:09:01



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461


Appendix 5

Diagram 9c:

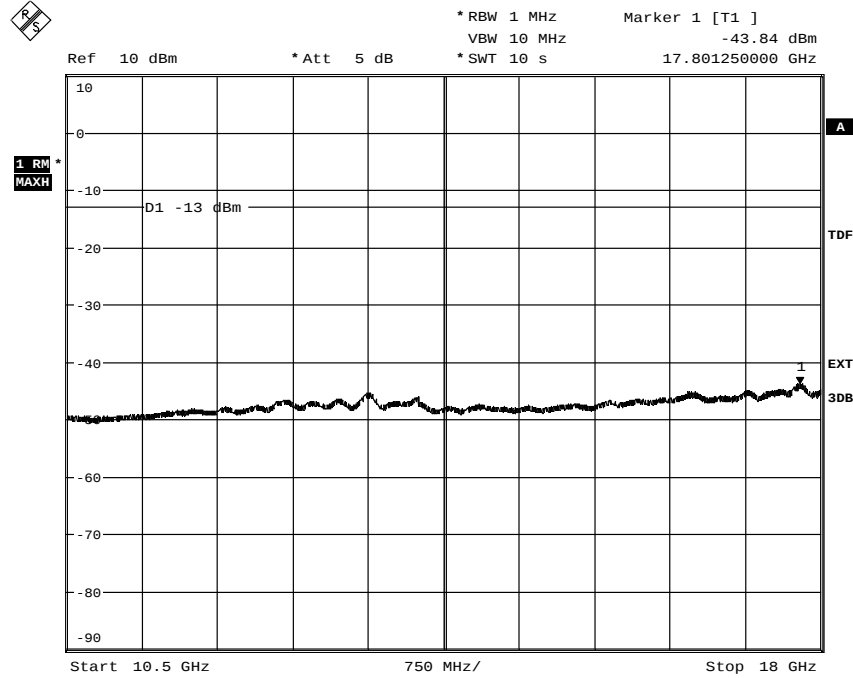


Date: 14.AUG.2012 15:10:26

Diagram 9d:

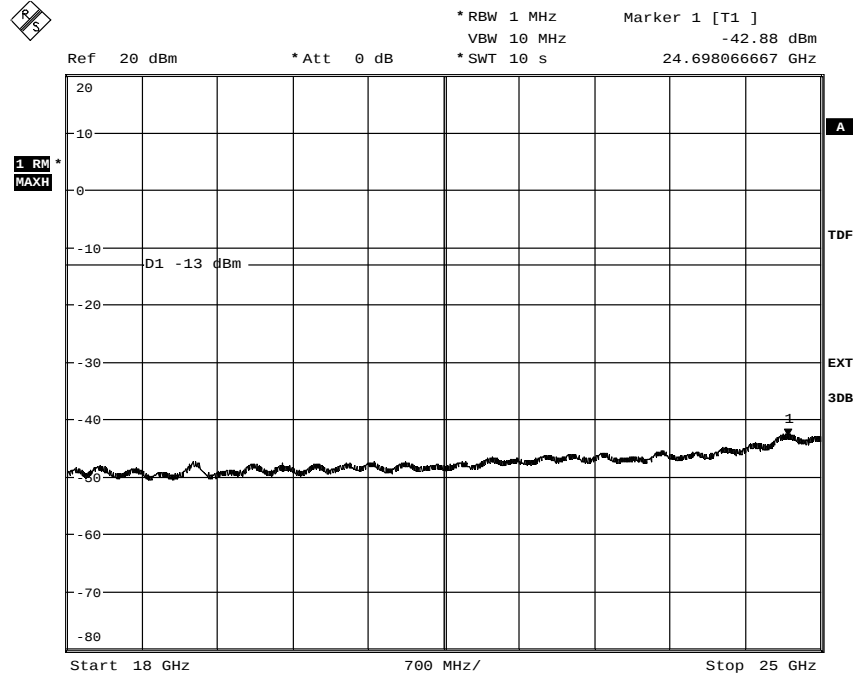


Date: 14.AUG.2012 15:11:52

Diagram 10a:

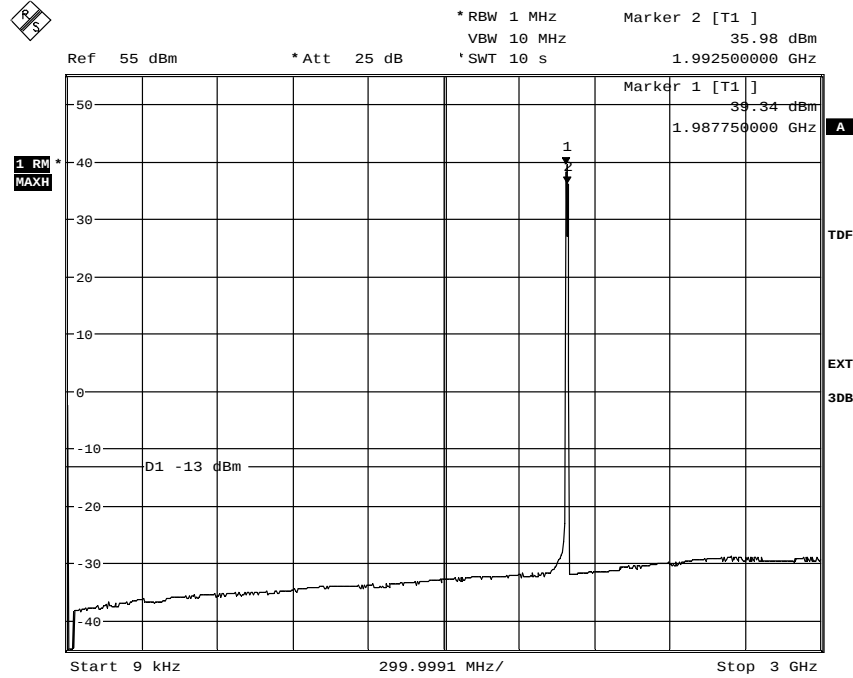


Date: 14.AUG.2012 14:32:19

Diagram 10b:

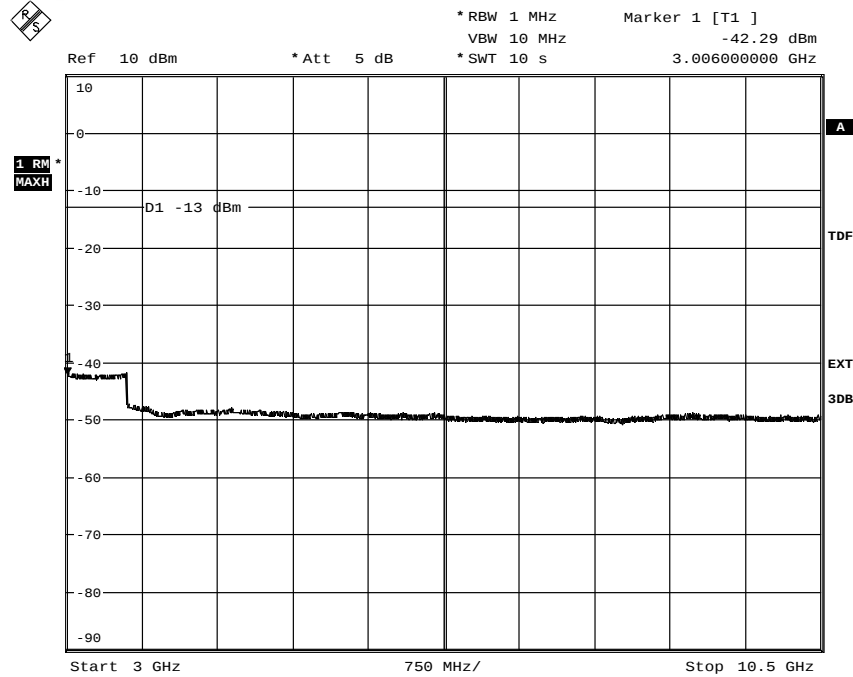


Date: 14.AUG.2012 14:40:10

Diagram 10c:

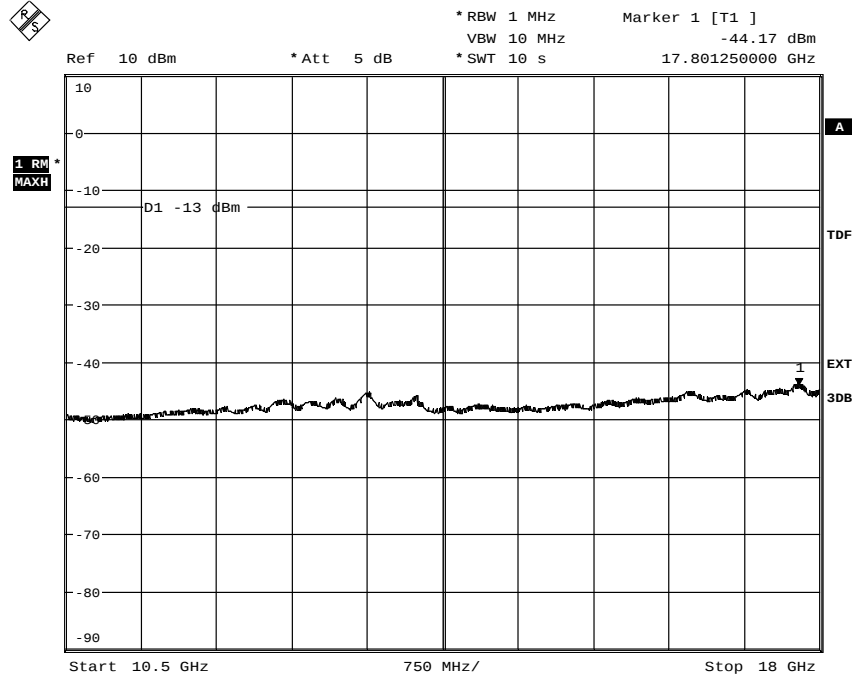

Date: 14.AUG.2012 14:41:54

Diagram 10d:

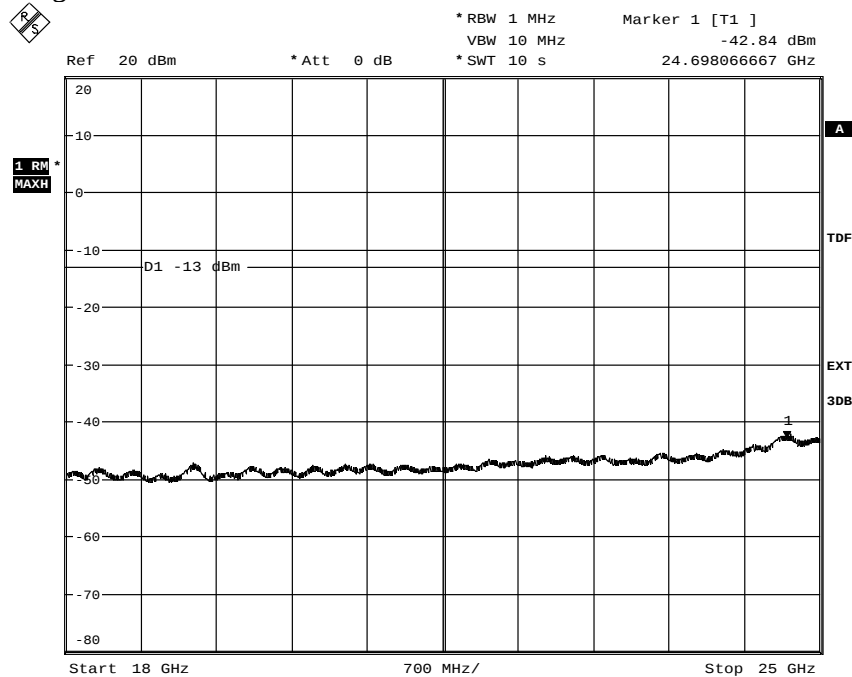


Date: 14.AUG.2012 14:43:07



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 5

Diagram 10e:

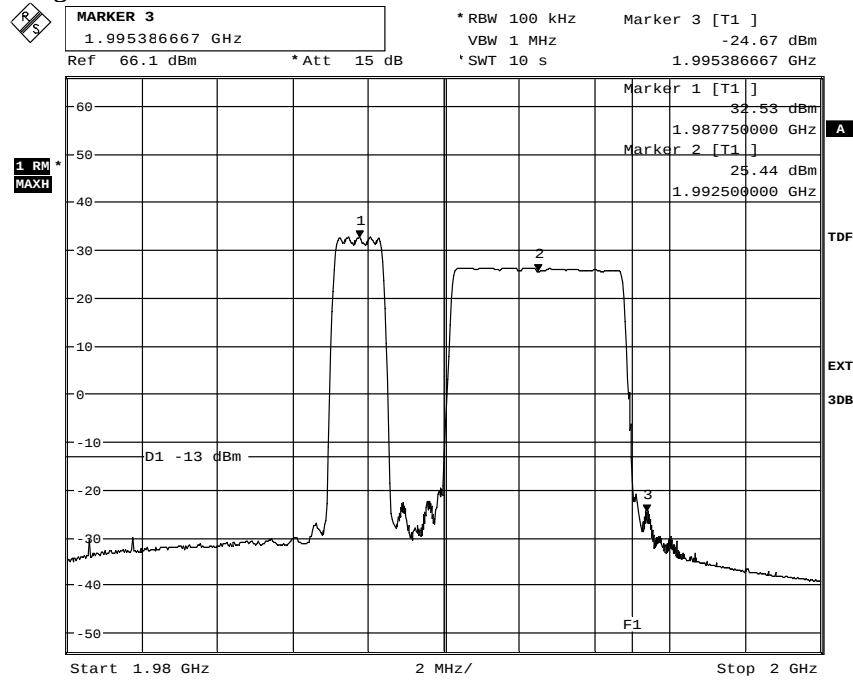

Date: 14.AUG.2012 14:27:17

Note: measurement results should be compared against a limit of -23 dBm.

Field strength of spurious radiation measurements according to CFR 47 §24.238 / IC RSS-133 6.5

Date	Temperature	Humidity
2012-06-20	23°C ± 3 °C	36 % ± 5 %
2012-06-21	23°C ± 3 °C	34 % ± 5 %
2012-06-25	23°C ± 3 °C	46 % ± 5 %

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18 - 25 GHz.

In the frequency range 30 MHz - 25 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was

$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.

The test set-up during the spurious radiation measurement is shown in the picture below:



Measurement equipment

Measurement equipment	SP number
Test site Tesla	503 881
R&S ESU 26	901 553
EMC 32 ver. 8.52.0	503 745
Chase Bilog antenna CBL 6111A	502 181
EMCO Horn Antenna 3115	502 175
Standard gain antenna 20240-20	503 674
HP-filter 3-18 GHz	504 200
µComp Nordic, Low Noise Amplifier	901 545
Miteq, Low Noise Amplifier	503 285
Schwarzbeck BBV9742, Low Noise Amplifier	504 085
Temperature and humidity meter, Testo 625	504 188

Tested configurations

LTE

BW configuration/ / [MHz]	Tested frequency
5	M
10	M
15	M

LTE+ CDMA

Configuration 4
Configuration 5
Configuration 6
Configuration 7
Configuration 8

Results, representing worst case

Configuration 5

Diagram 1:a-d

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-25 000	All emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty:

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz

Limits

§24.238 and RSS-139 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

Diagram 1a:



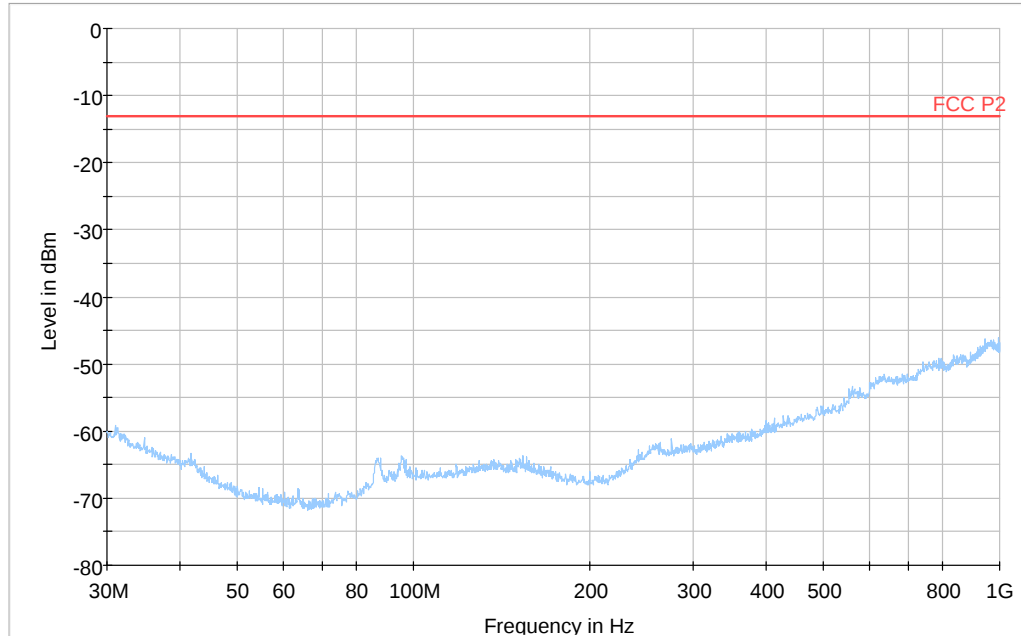


Diagram 1b:

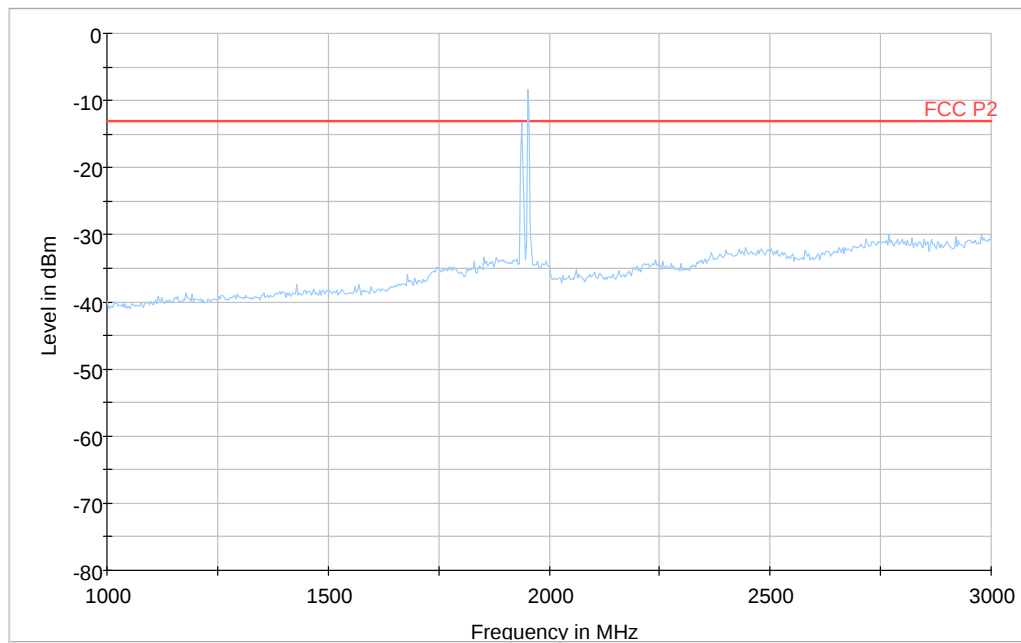

Note: The emission between 1938.1 MHz and 1955 MHz are the carrier frequencies and shall be ignored in the context.

Diagram 1c:

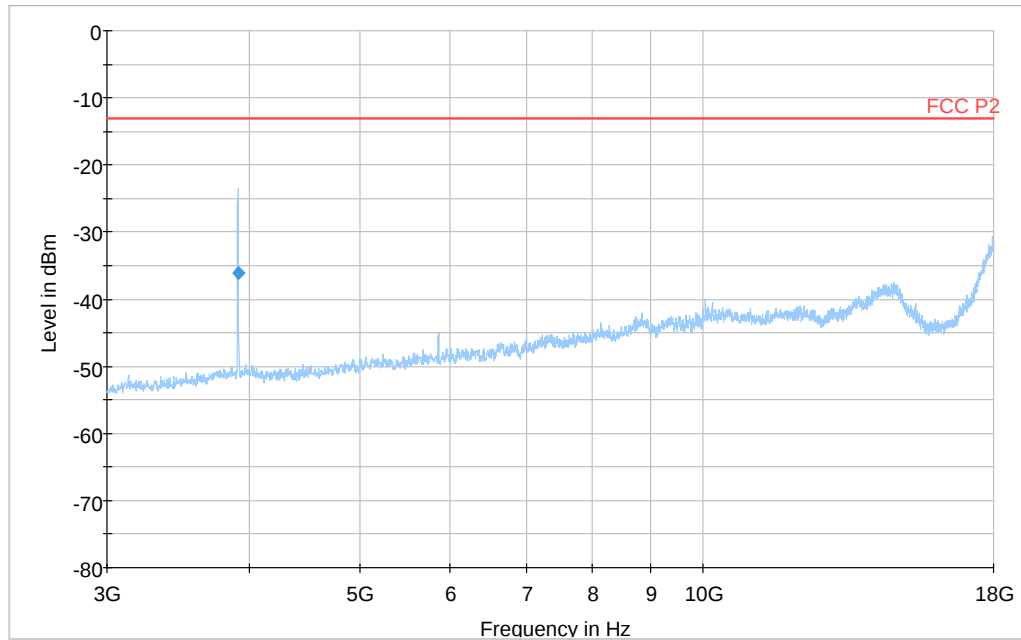

Final RMS Result


Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
3910.368	-36.1	5000.0	1000.000	152.0	H	94.0	-103.3	23.1	-13.0



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461



Appendix 6

Diagram 1d:

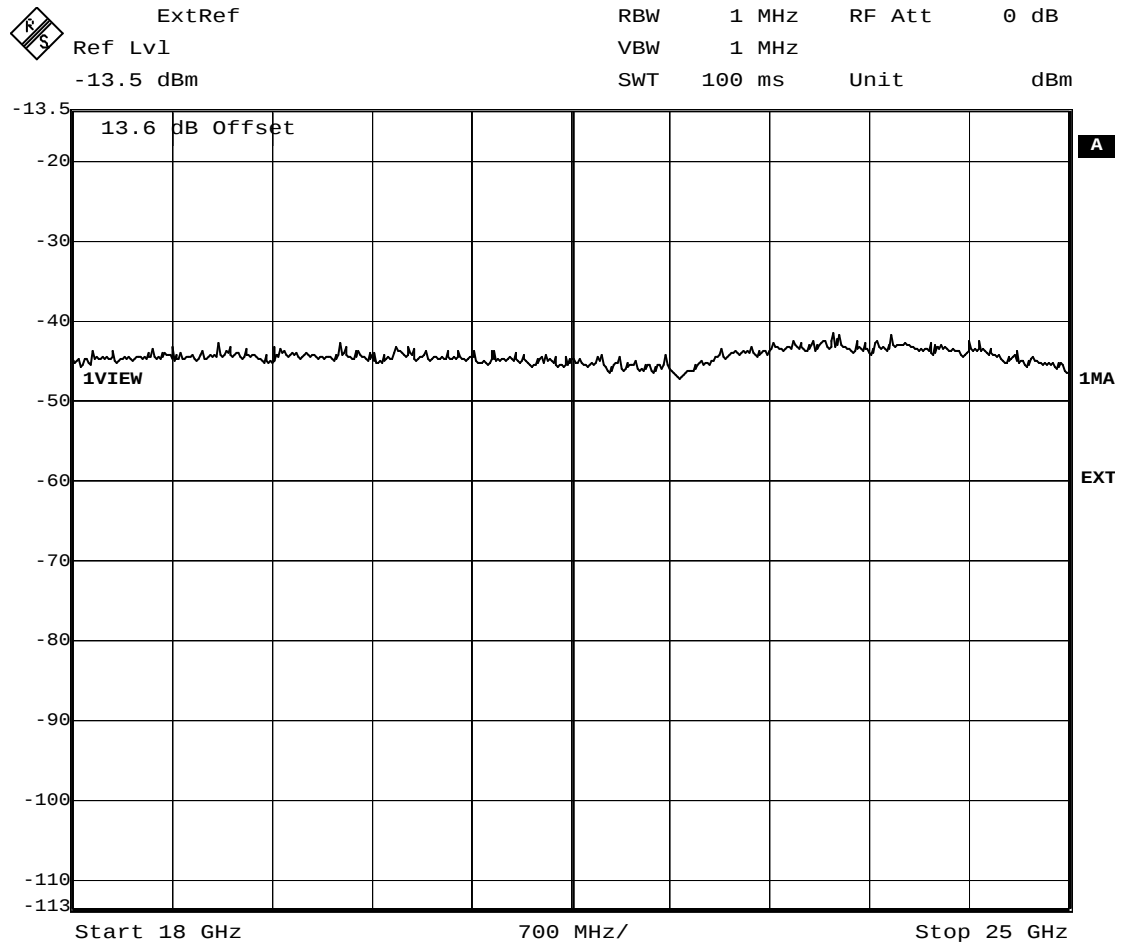

External photos

Front side

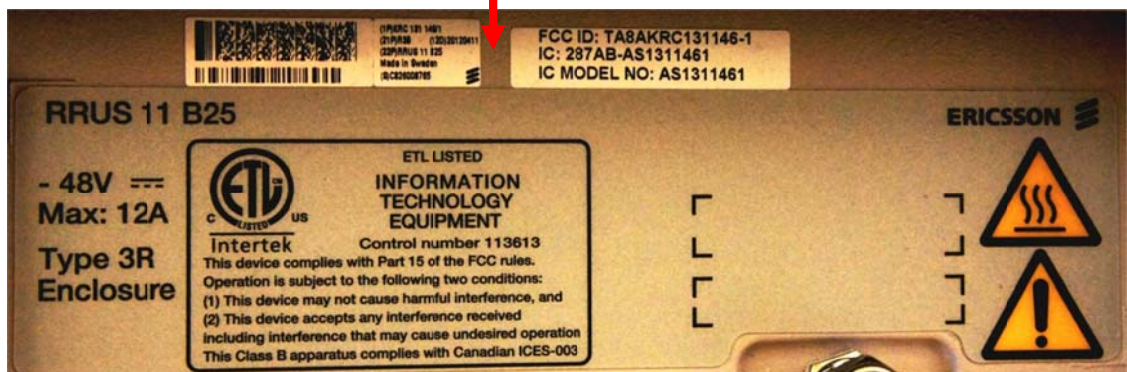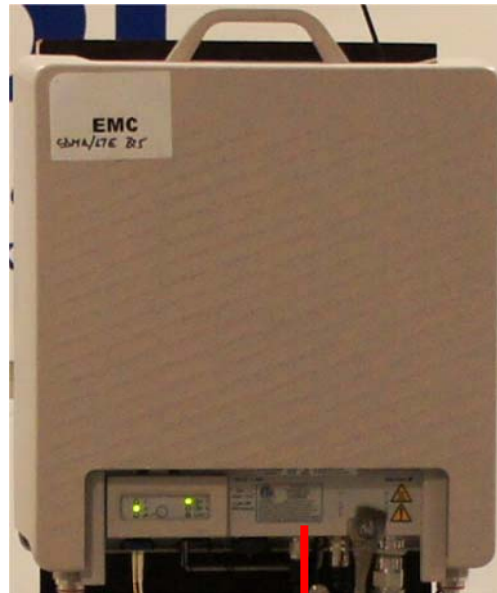

Rear side





REPORT

Date
2012-08-22

Reference
FX213277-F24

Page
2 (3)



FCC ID: TA8AKRC131146-1
IC: 287AB-AS1311461

Appendix 7


Left side



Right side



Bottom Side

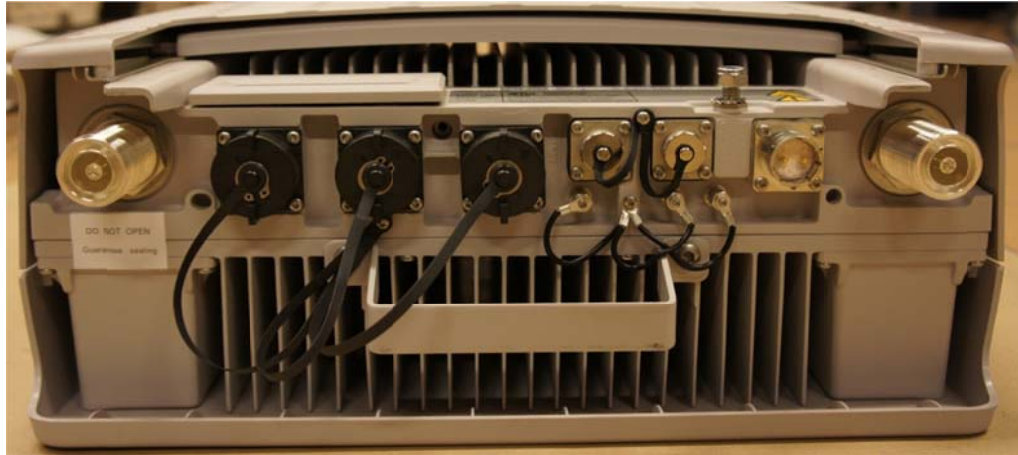

Top Side

