

Ericsson AB
Klaes Holm
PDU HW
164 80 Stockholm

Radio measurements on RUS 02 B5 850 MHz radio equipment with FCC ID TA8AKRC161320-1 and IC 287AB-AS1613201 (9 appendices)

Test object

Product name: RUS 02 B5
Product number: KRC 161 320/1, R1C

Summary

See appendix 1 for details.

Standard	Compliant	Appendix
FCC CFR 47 / IC RSS-132 ISSUE 3		
2.1046 / RSS-132 5.4 RF power output	Yes	2
2.1049 / RSS-Gen 4.6.1 Occupied bandwidth	Yes	3
2.1051 / RSS-132 5.5 Band edge	Yes	4
2.1051 / RSS-132 5.5 Spurious emission at antenna terminals	Yes	5
2.1053 / RSS-132 5.5 Field strength of spurious radiation	Yes	6
2.1055 / RSS-132 5.3 Frequency stability	Yes	7
15.111 /Receiver spurious emissions	Yes	8

Note: Above RSS-132 items are given as cross-reference only. Measurements were performed according to ANSI procedures referenced by FCC and covered by SP's accreditation.

SP Technical Research Institute of Sweden


Electronics – EMC

Prepared by



Jörgen Wassholm

Examined by



Anders Nordlöf

SP Technical Research Institute of Sweden

Postal address

SP
Box 857
SE-501 15 BORÅS
Sweden

Office location

Västerås
Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Table of contents

Description of the test object	Appendix 1
Purpose of test	Appendix 1
Operation modes during measurements	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Frequency stability	Appendix 7
Receiver spurious emissions	Appendix 8
External photos	Appendix 9

Appendix 1

Description of the test object

Equipment:	Product name: RUS 02 B5, supporting LTE Product number KRC 161 320/1 FCC ID TA8AKRC161320-1 IC: 287AB-AS1613201 IC MODEL NO: AS1613201
Frequency range:	TX: 869 - 894 MHz RX: 824 - 849 MHz
Antenna ports:	1 TX/RX port 1 RX port
RF configurations:	Single carrier, multi carrier, TX diversity and MIMO 2x2
Nominal RF output power per antenna port:	Single carrier: Channel BW 1.4 & 3 MHz 1x 47.8 dBm (1x 60 W) Single carrier: Channel BW 5 & 10 MHz 1x 50 dBm (1x 100 W) Multi carrier: 2x 47.0 dBm (2 x 50 W)
Antenna:	No dedicated antenna, handled during licensing
Modulations:	QPSK, 16QAM and 64QAM
Channel bandwidths:	1.4 MHz, 3 MHz, 5 MHz and 10 MHz
Nominal power voltage:	-48VDC

Appendix 1

Operation mode during measurements

LTE Single RAT

Measurements were performed with the test object transmitting test models as defined in 3GPP TS 36.141. Test model E-TM1.1 was used to represent QPSK, test model E-TM3.2 to represent 16QAM and test model E-TM3.1 to represent 64QAM modulation.

The settings below were deemed representative for all traffic scenarios when settings with different modulations, channel bandwidths, number of carriers and RF configurations has been tested to find the worst case setting. The settings below were used for all measurements if not otherwise noted.

MIMO mode, single carrier: E-TM1.1

MIMO mode, multi carrier: 2 carriers E-TM1.1

All measurements were performed with the test object configured for the maximum transmit power applicable for the tested configuration.

Conducted measurements

The test object was hosted in a RBS 6201 powered with -48 VDC. Additional connections are documented in the setup drawings below.

All measurements were performed on test object 1 (described in the Test set-up diagram), running in primary and secondary mode. Test object 2 has been used as dummy for MIMO configuration.

Radiated measurements

The test object was tested stand-alone. It was powered with -48 VDC. All measurements were performed with the test object configured for maximum transmitter output power at port RF A.

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47 and Industry Canada RSS-132 and RSS-Gen.

References

Measurements were done according to relevant parts of the following standards:

ANSI 63.4-2009

ANSI/TIA/EIA-603-C-2004

CFR 47 part 2, October 1st, 2012

CFR 47 part 22, October 1st, 2012

3GPP TS 36.141, version 11.4.0

RSS-Gen Issue 3

RSS-132 Issue 3

Appendix 1

Measurement equipment

	Calibration Due	SP number
Test site Tesla	2014-01	503 881
R&S ESU 26	2014-05	901 553
R&S FSQ 40	2014-03	504 143
R&S FSW 43	2014-03	902 073
Control computer with R&S software EMC32 version 8.52.0	-	503 899
High pass filter	2014-07	901 501
High pass filter	2014-07	901 502
High pass filter	2014-07	504 199
High pass filter	2014-09	901 373
High pass filter	2014-08	503 739
High pass filter	2014-07	503 740
RF attenuator	2014-09	503 248
RF attenuator	2014-09	503 249
RF attenuator	2014-07	504 159
RF attenuator	2014-07	900 233
RF attenuator	2014-07	901 384
RF attenuator	2013-12	901 508
Chase Bilog Antenna CBL 6111A	2014-10	503 182
EMCO Horn Antenna 3115	2014-01	502 175
µComp Nordic, Low Noise Amplifier	2014-04	901 545
Temperature and humidity meter, Testo 635	2014-06	504 203
Temperature and humidity meter, Testo 625	2014-06	504 188
Temperature Chamber	--	503 360
Multimeter Fluke 87	2014-08	502 190

Appendix 1

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered 2013-08-19.

Manufacturer's representative

Christer Gustavsson, Ericsson AB.

Test engineers

Tomas Lennhager, Tomas Isbring, Kexin Chen, Jörgen Wassholm and Hyder Khalaf, SP.

Test participant

Gunnar Svensson, Ericsson AB (partially).

Appendix 1


TX test frequencies used for conducted and radiated measurements

EARFCN Downlink	Frequency [MHz]	Symbolic name	Comment
2407	869.7	B	TX bottom frequency in 1.4 MHz BW configuration
2415	870.5	B	TX bottom frequency in 3 MHz BW configuration
2425	871.5	B	TX bottom frequency in 5 MHz BW configuration
2450	874.0	B	TX bottom frequency in 10 MHz BW configuration
2407	869.7	Bim2	2 carrier TX band bottom constellation
2426	871.6		1.4 MHz BW configuration
2474	876.4	Bim3	2 carrier TX band bottom constellation
2560	885.0		1.4 MHz BW configuration
2415	870.5	Bim4	2 carrier TX band bottom constellation
2430	872.0		3 MHz BW configuration
2415	870.5	Bim5	2 carrier TX band bottom constellation
2455	874.5		3 MHz BW configuration
2525	881.5	M	TX band mid frequency all BW configurations
2475	876.5	M2-5	2 carrier TX band mid constellation
2575	886.5		5 MHz BW configuration
2517	880.7	M2-3	2 carrier TX band mid constellation
2532	882.2		3 MHz BW configuration
2518	880.8	M2-1.4	2 carrier TX band mid constellation
2532	882.2		1.4 MHz BW configuration
2643	893.3	T	TX top frequency in 1.4 MHz BW configuration
2635	892.5	T	TX top frequency in 3 MHz BW configuration
2625	891.5	T	TX top frequency in 5 MHz BW configuration
2600	889.0	T	TX top frequency in 10 MHz BW configuration
2624	891.4	Tim2	2 carrier TX band top constellation
2643	893.3		1.4 MHz BW configuration
2500	879.0	Tim3	2 carrier TX band bottom constellation
2586	887.6		1.4 MHz BW configuration
2620	891.0	Tim4	2 carrier TX band bottom constellation
2635	892.5		3 MHz BW configuration
2595	888.5	Tim5	2 carrier TX band bottom constellation
2635	892.5		3 MHz BW configuration

All RX frequencies were configured 45 MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

Appendix 1

Test set-up conducted RX measurements LTE MIMO, at port RF B

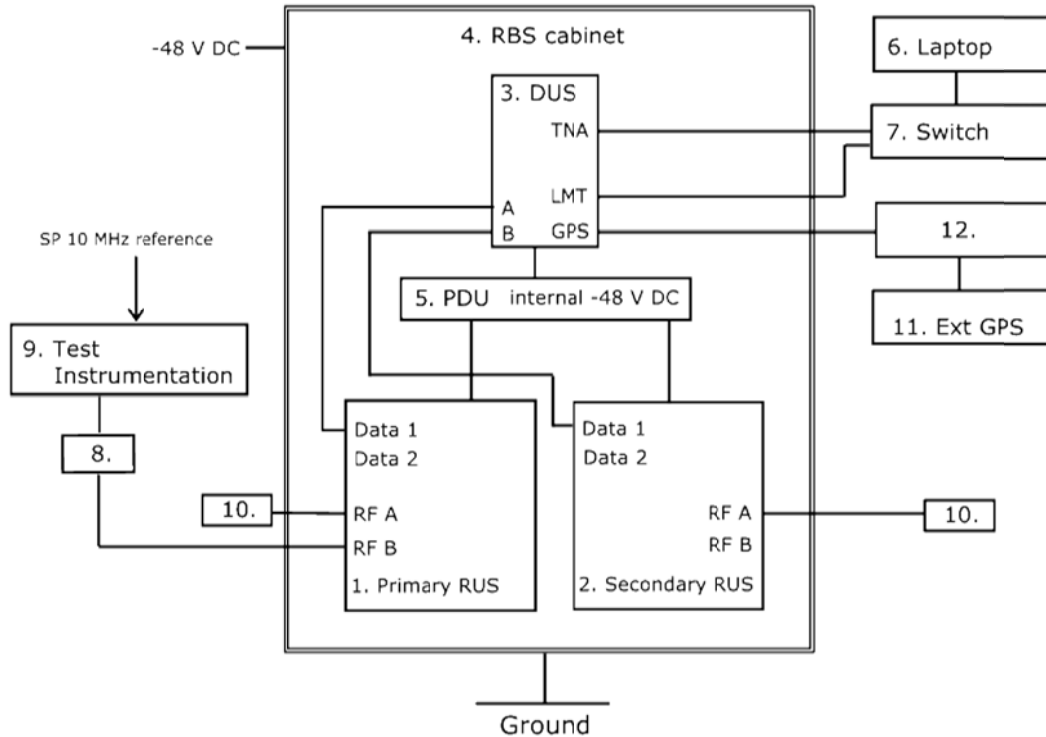

Note: Unconnected interfaces were omitted in the picture for simplicity, but are listed in the interface table on page 8.

Test object:


1.	RUS 02 B5, KRC 161 320/1, rev. R1C, s/n: C827123129, primary/ secondary
2.	RUS 02 B5, KRC 161 320/1, rev. R1C, s/n: C827123115, Dummy: secondary/ primary working software PIS CXP 901 7316/2, rev. R51MT with FCC ID TA8AKRC161320-1 and IC: 287AB-AS1613201

Functional test equipment

3.	DUS 41 01, KDU 137 624/1, rev:R5A, s/n: C165724700
4.	RBS 6201 cabinet, BAMS – 1000778792
5.	PDU 02 01, BMG 980 336/4, rev: R2A, s/n: BJ31528316
6.	Controlling laptop HP EliteBook 8560 w, BAMS – 1001236858
7.	Fast Ethernet switch, Netgear FS726T
8.	Attenuator, according respective appendix
9.	SP Test Instrumentation according to measurement equipment list
10.	Terminator, 50 ohm
11.	GPS Active Antenna, KRE 101 2082/1
12.	GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8K474887

Appendix 1

Test setup radiated measurements LTE MIMO

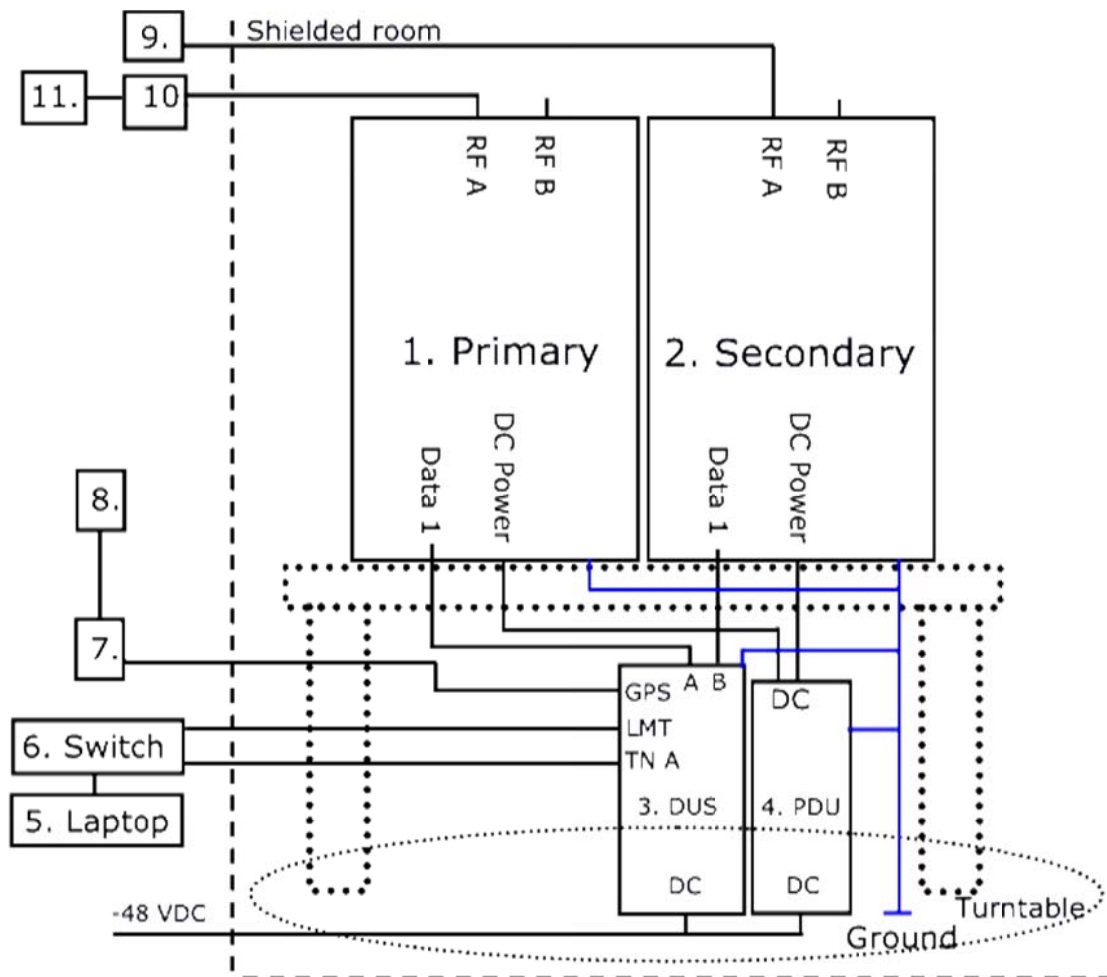

Test object:

1. RUS 02 B5, KRC 161 320/1, rev. R1C, s/n: C827123103 primary
2. RUS 02 B5, KRC 161 320/1, rev. R1C, s/n: C827159515 secondary
working software: CXP 901 7316/2, rev. R51MT with
FCC ID TA8AKRC161320-1 and IC: 287AB-AS1613201

Appendix 1

Functional test equipment:

3.	DUS 41 01 KDU 137 624/1, rev. R5A, s/n: D165724700, hosted in SUP 6601, 1/BFL 901 009/4, rev. R1E, s/n: BR88258668
4.	Power Subrack: PDU 01 01, BMG 980 336/2, R4F, BJ31532384 PDU 01 01, BMG 980 336/2, R4F, BJ31532382 SHU 01 01, BGK 901 18/1, R3C, BJ31446269 PFU 01 01, KFE 101 1162/1, R1B, BR80910495 PCF 02 01, KFE 101 1157/1, R1C, BW95301450 DUMMY x3, SXX 109 8257/1, R1D DUMMY x1, SXX 109 8257/1, R1F
5.	Laptop, EliteBook 8560w, BAMS – 1001236856
6.	Fast Ethernet switch, Netgear FS726T
7.	GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8K356428
8.	GPS Active Antenna, KRE 101 2082/1
9.	Terminator
10.	Attenuator
11.	ESI 26, SP number: 503 292, for supervision purpose only

Interfaces:

Type of port:

Power: -48 VDC	DC Power
Antenna port (A), 7/16 connector, combined TX/RX	Antenna
Antenna port (B), 7/16 connector, only RX	Antenna
Data 1, electrical interface	Signal
Data 2, electrical interface	Signal
RX A Out, no cable attached	Antenna
RX A I/O, no cable attached	Antenna
RX B I/O, no cable attached	Antenna
Ground wire	Ground

RBS software:

Software	Revision
CXP 102 051/18	R32AV

Appendix 2

RF power output measurements according to CFR 47 2.1046 / IC RSS-132 5.4

Date	Temperature	Humidity
2013-08-28	23 °C ± 3 °C	43% ± 5 %
2013-08-29	23 °C ± 3 °C	46% ± 5 %
2013-08-30	23 °C ± 3 °C	52% ± 5 %

Test set-up and procedure

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A RBW of 50 MHz was used.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	901 508
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB

Results

Single carrier , non MIMO

Rated output power level at RF connector 1x 47.8 dBm.

Tested configuration BW and frequency	[RMS dBm/ dB PAR]
1.4 MHz, M	47.68/ 6.92
3 MHz, M	47.78/ 6.80

Rated output power level at RF connector 1x 50 dBm.

Tested configuration BW and frequency	[RMS dBm/ dB PAR]
5 MHz, M	49.53/ 6.80
10 MHz, M	49.50/ 6.78
5 MHz, B	49.44/ 6.80
10 MHz, B	49.43/ 6.88
5 MHz, T	49.28/ 6.90
10 MHz, T	49.39/ 7.02

Appendix 2

Single carrier MIMO

Rated output power level at RF connector 1x 47.8 dBm.

Tested configuration BW and frequency	Primary mode [RMS dBm/ dB PAR]	Secondary mode [RMS dBm/ dB PAR]	Total power ¹⁾ [RMS dBm]
1.4 MHz, M	47.81/ 6.90	47.75/ 6.92	50.79
3 MHz, M	47.90/ 6.80	47.86/ 6.83	50.89

Rated output power level at RF connector 1x 50 dBm.

Tested configuration BW and frequency	Primary mode [RMS dBm/ dB PAR]	Secondary mode [RMS dBm/ dB PAR]	Total power ¹⁾ [RMS dBm]
5 MHz, B	49.48/ 6.83	49.44/ 6.83	52.47
10 MHz, B	49.52/ 6.85	49.56/ 6.85	52.55
5 MHz, M	49.66/ 6.80	49.63/ 6.80	52.66
10 MHz, M	49.60/ 6.78	49.64/ 6.78	52.63
5 MHz, T	49.36/ 6.88	49.34/ 6.90	52.36
10 MHz, T	49.42/ 7.02	49.44/ 7.02	52.44

¹⁾: summed output power according to FCC KDB662911 Multiple transmitter output v02

Multicarrier MIMO

Rated output power level at RF connector 2x 47 dBm.

Tested configuration BW and frequency	Primary mode [RMS dBm/ dB PAR]	Secondary mode [RMS dBm/ dB PAR]	Total power ¹⁾ [RMS dBm]
1.4 MHz, Bim2	49.40/ 7.09	49.39/ 7.14	52.41
3 MHz, Bim4	49.34/ 6.80	49.37/ 6.80	52.37
1.4 MHz, M2-1.4	49.60/ 7.02	49.58/ 7.04	52.60
3 MHz, M2-3	49.57/ 6.78	49.57/ 6.78	52.58
1.4 MHz, Tim2	49.20/ 7.12	49.17/ 7.14	52.20
3 MHz, Tim4	49.20/ 6.88	49.21/ 6.88	52.22

¹⁾: summed output power according to FCC KDB662911 Multiple transmitter output v02

Appendix 2

Remark

This unit is tested without antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/IC Bureau(s). Licensee's are required to take into account maximum allowed antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.

Limits

CFR47 § 22.913: The effective radiated power ERP shall not exceed 1000 W.

RSS-132 5.4: The average equivalent isotropically radiated power (e.i.r.p.) limits in SRSP-503 apply, resulting in a maximum EIRP of 1640 W.
The PAR (0.1%) shall not exceed 13 dB.

Complies?	Yes
-----------	-----

Appendix 3

Occupied bandwidth measurements according to CFR47 2.1049 / RSS-Gen 4.6.1

Date	Temperature	Humidity
2013-08-28	23 °C ± 3 °C	43% ± 5 %
2013-08-29	23 °C ± 3 °C	46% ± 5 %
2013-08-30	23 °C ± 3 °C	52% ± 5 %
2013-09-16	23 °C ± 3 °C	44% ± 5 %

Test set-up and procedure

The measurements were made per definition in § 2.1049. The output was connected to a signal analyzer with the RMS detector activated. The signal analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	901 508
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Single carrier, non MIMO

Diagram	BW configuration	Tested frequency	Tested mode	Occupied BW (99%) [MHz]
1	1.4 MHz	M	Primary	1.09
2	5 MHz	M	Primary	4.48

Appendix 3


Single carrier MIMO

Diagram	BW configuration	Tested frequency	Test mode	Occupied BW (99%) [MHz]
3	1.4 MHz	B	Primary	1.09
4	10 MHz	B	Primary	8.94
5	1.4 MHz	M	Primary	1.09
6	1.4 MHz	M	Secondary	1.09
7	3 MHz	M	Primary	2.69
8	5 MHz	M	Primary	4.48
9	10 MHz	M	Primary	8.94
10	10 MHz	M	Secondary	8.94
11	1.4 MHz	T	Primary	1.09
12	10 MHz	T	Primary	8.94

The diagrams are shown on the following pages.


Appendix 3

Diagram 1:

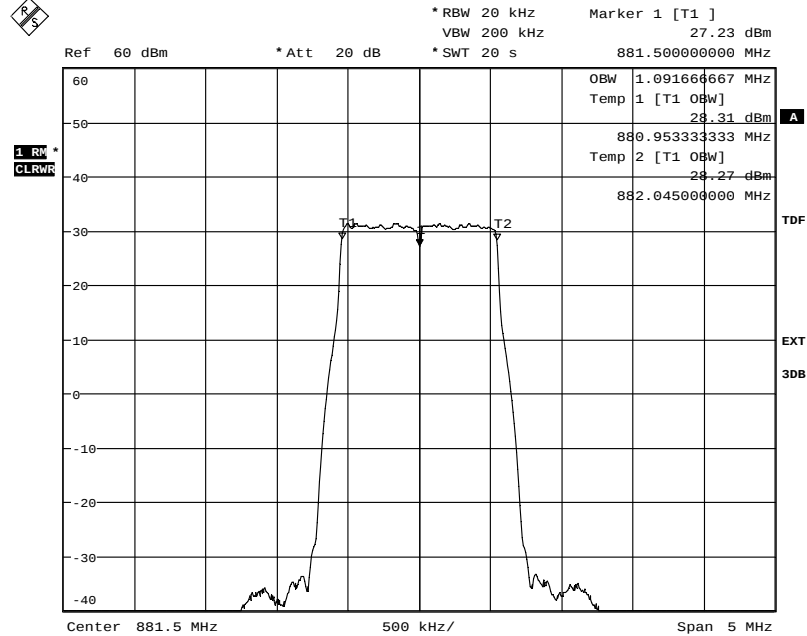

Date: 16.SEP.2013 11:03:47


Diagram 2:

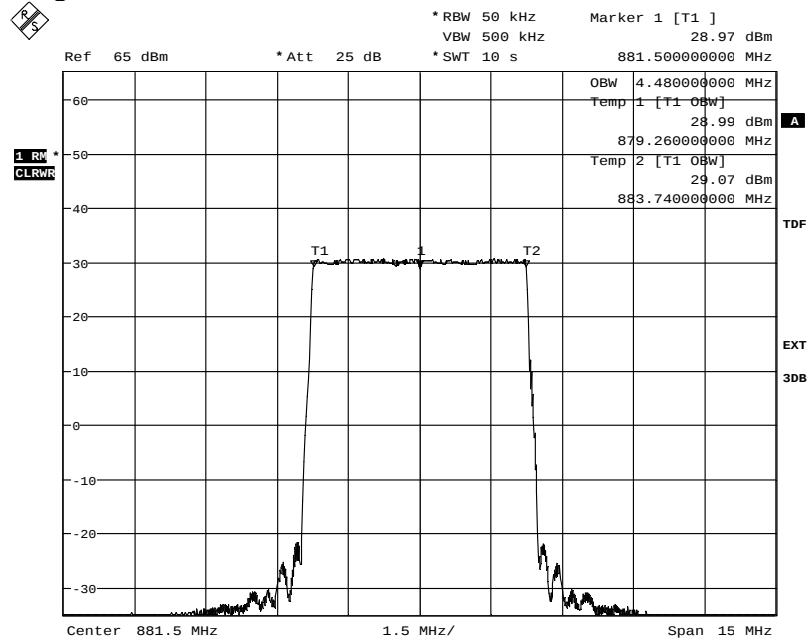

Date: 29.AUG.2013 13:33:53


Appendix 3

Diagram 3:

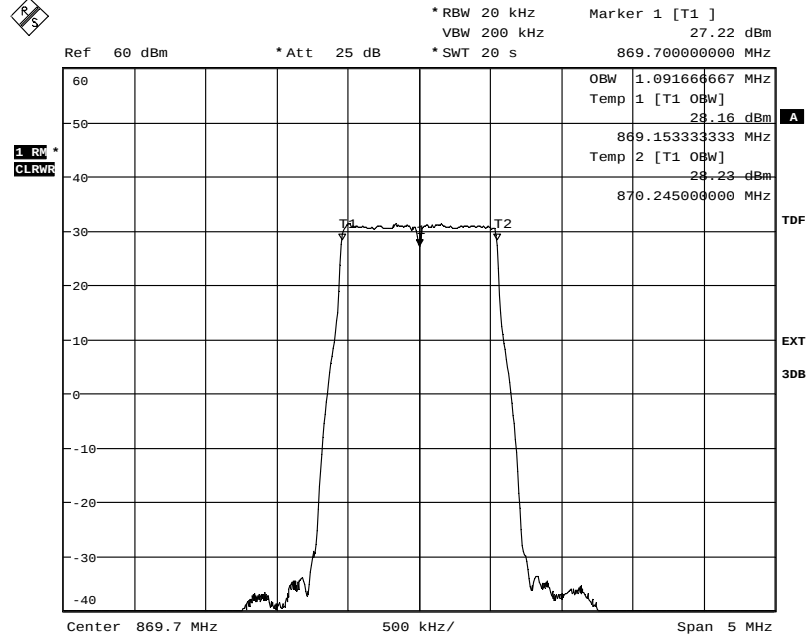

Date: 16.SEP.2013 11:43:45


Diagram 4:

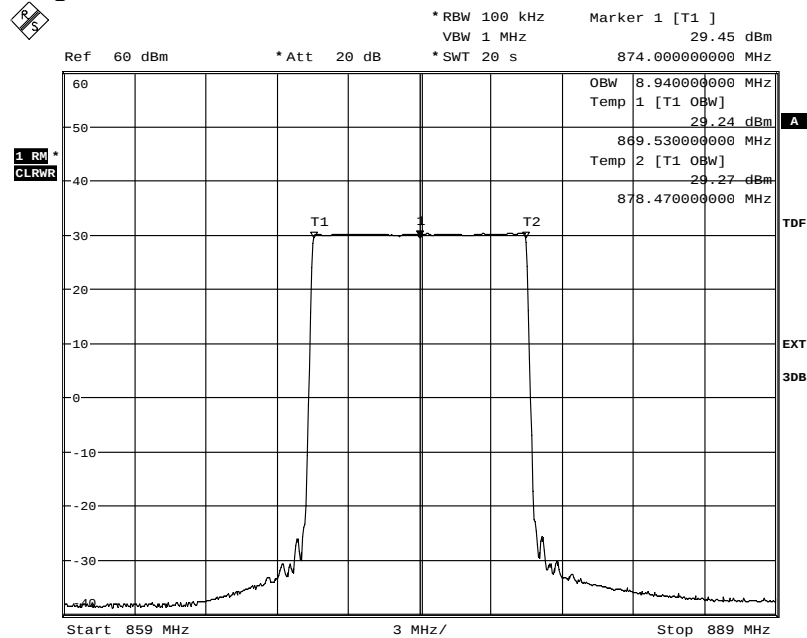

Date: 28.AUG.2013 16:20:04


Appendix 3

Diagram 5:

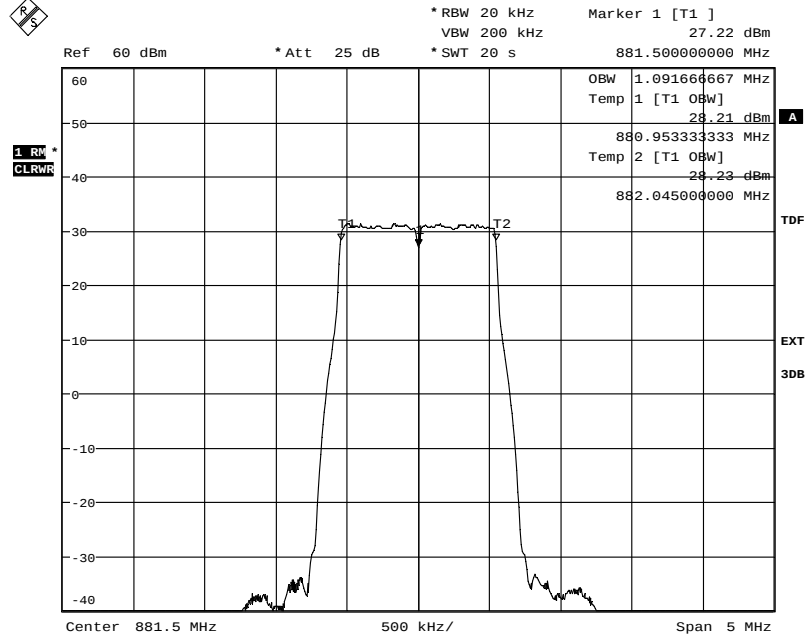

Date: 16.SEP.2013 11:46:19


Diagram 6:

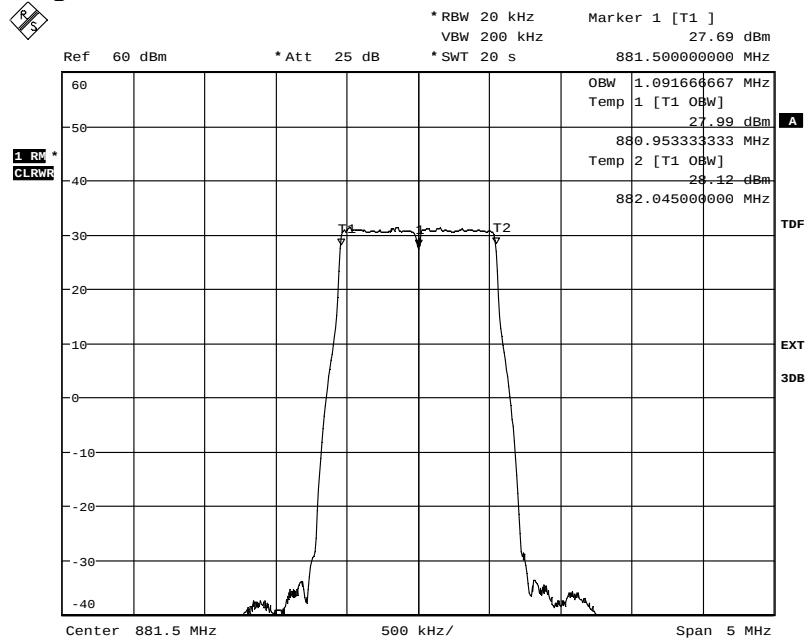

Date: 16.SEP.2013 11:41:03


Appendix 3

Diagram 7:

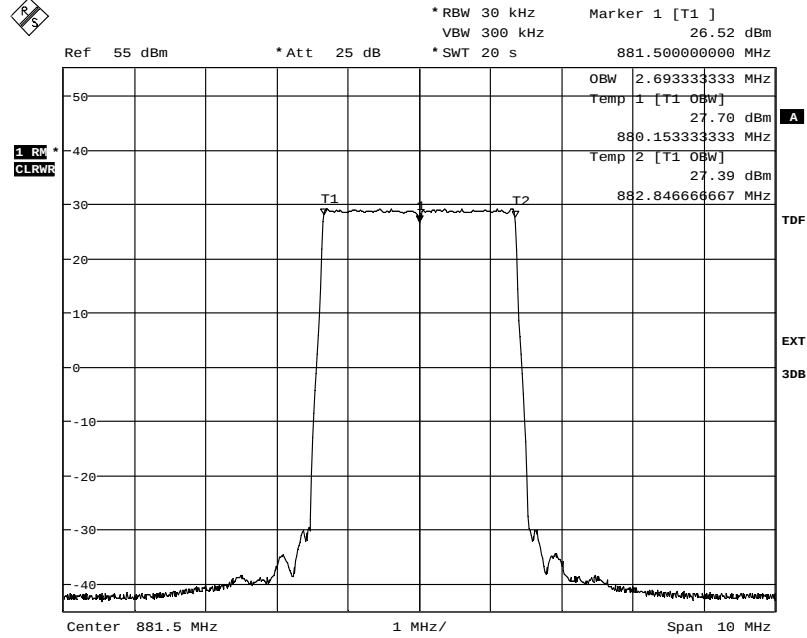

Date: 16.SEP.2013 12:09:11


Diagram 8:

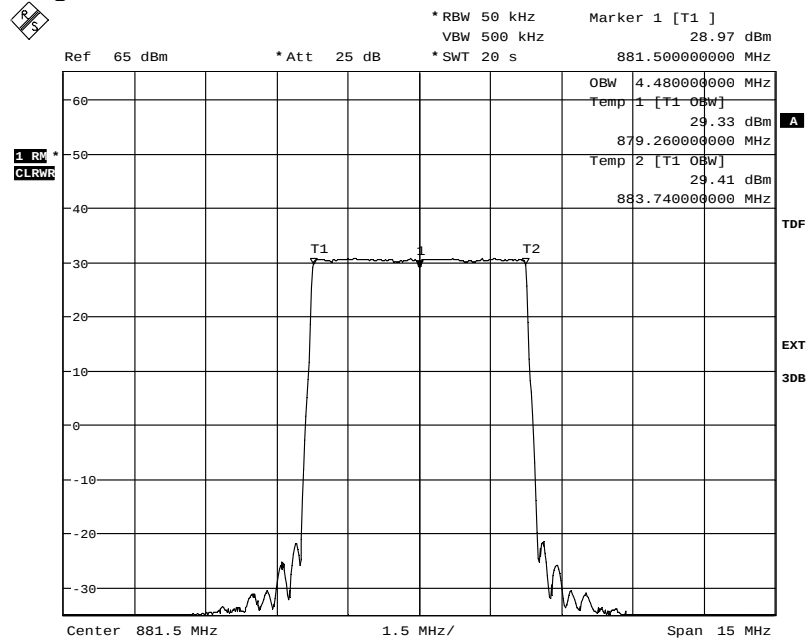

Date: 16.SEP.2013 12:16:54


Appendix 3

Diagram 9:

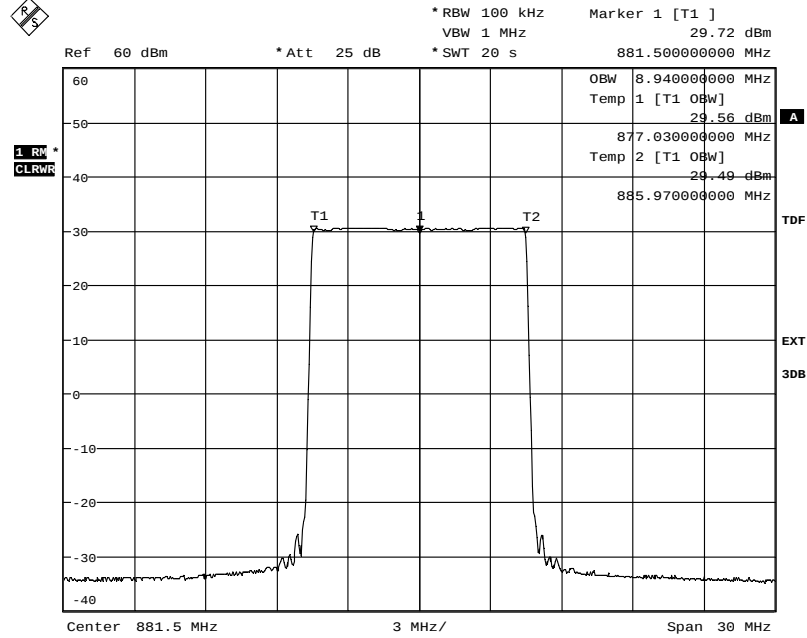

Date: 16.SEP.2013 11:57:58


Diagram 10:

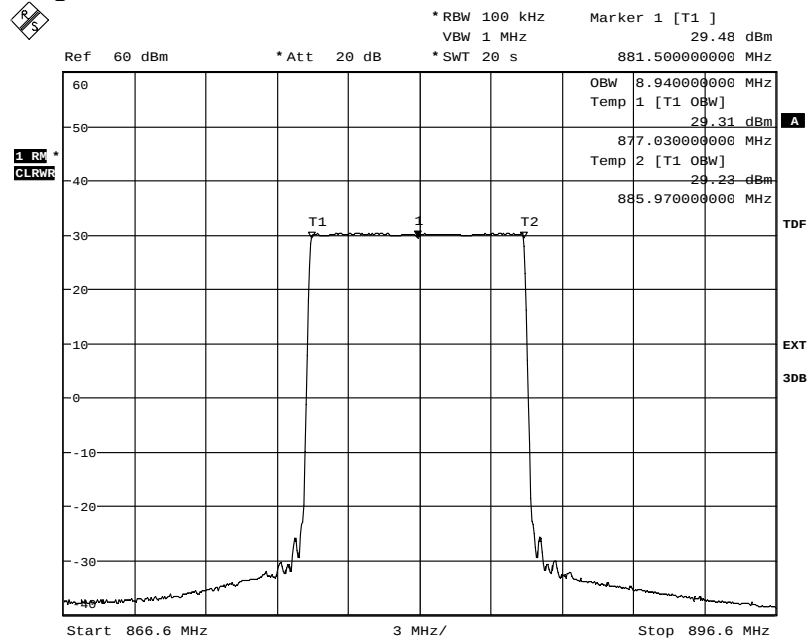

Date: 30.AUG.2013 12:06:56


Appendix 3

Diagram 11:

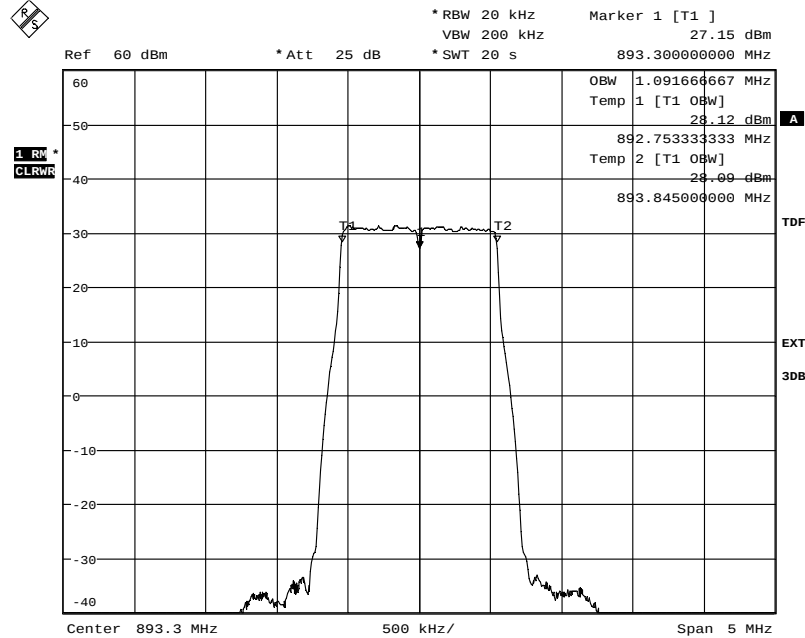

Date: 16.SEP.2013 11:49:11

Diagram 12:

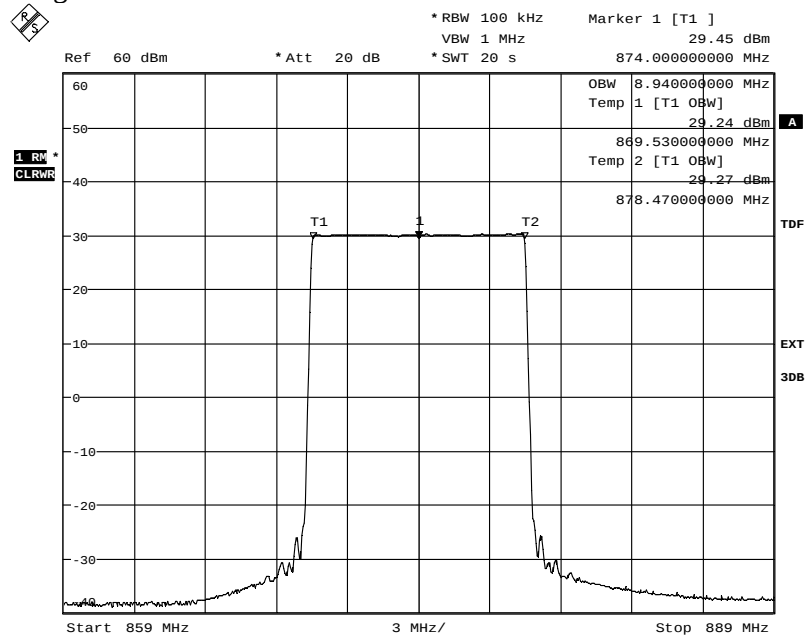

Date: 28.AUG.2013 16:20:04

Appendix 4

Band edge measurements according to CFR 47 §2.1051 / IC RSS-132 5.5

Date	Temperature	Humidity
2013-08-28	23 °C ± 3 °C	43% ± 5 %
2013-08-29	23 °C ± 3 °C	46% ± 5 %
2013-08-30	23 °C ± 3 °C	52% ± 5 %

Test set-up and procedure

The measurements were made per definition in § 22.917. The test object was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

FCC rules specify a RBW of at least 1% of the fundamental emission bandwidth (EBW) for offsets up to 1 MHz from the band edge and a RBW of 100 kHz for measurements of emissions more than 1 MHz away from the band edges.

Where a smaller RBW was used as compared to the rules the limit in the plot is adjusted by $10 \cdot \log(\text{RBW}_{\text{used}}/\text{RBW}_{1\% \text{EBW}})$ [dB].

BW configuration	Emission BW [MHz]	RBW used	Adjusted limit [dBm]
1.4 MHz	1.12	10 kHz	-13.50
3 MHz	2.73	10 kHz	-17.40
5 MHz	4.54	20 kHz	-16.56

Before comparing the results to the limit, 3 dB $[10 \log(2)]$ should be added according to method E), 3, (iii) “measure and add $10 \log(N_{\text{ANT}})$ ” of FCC KDB662911 D01 Multiple Transmitter Output v02

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	901 508
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 4

Results

Single carrier, non MIMO

Diagram	BW configuration	Tested frequency
1 a+b	3 MHz	B
2 a+b	3 MHz	T

Single carrier, MIMO

Diagram	BW configuration	Tested frequency	Test mode
3 a+b	1.4 MHz	B	Primary
4 a+b	3 MHz	B	Primary
5 a+b	3 MHz	B	Secodary
6 a+b	5 MHz	B	Primary
7 a+b	10 MHz	B	Primary
8 a+b	1.4 MHz	T	Primary
9 a+b	3 MHz	T	Primary
10 a+b	3 MHz	T	Secondary
11 a+b	5 MHz	T	Primary
12 a+b	10 MHz	T	Primary

Multi carrier, MIMO

Diagram	BW configuration	Tested frequency	Test mode
13 a+b	3 MHz	Bim4	Primary
14 a+b	3 MHz	Tim4	Primary

The diagrams are shown on the following pages.

Remark

Where multiple requirements apply, the most stringent requirement is considered for compliance assessment.

Limits


CFR 47 § 22.917: Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 100 kHz RBW.

IC RSS-132 5.5.1.2: Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB per any 100 kHz RBW.

Complies?	Yes
-----------	-----


Appendix 4

Diagram 1 a:

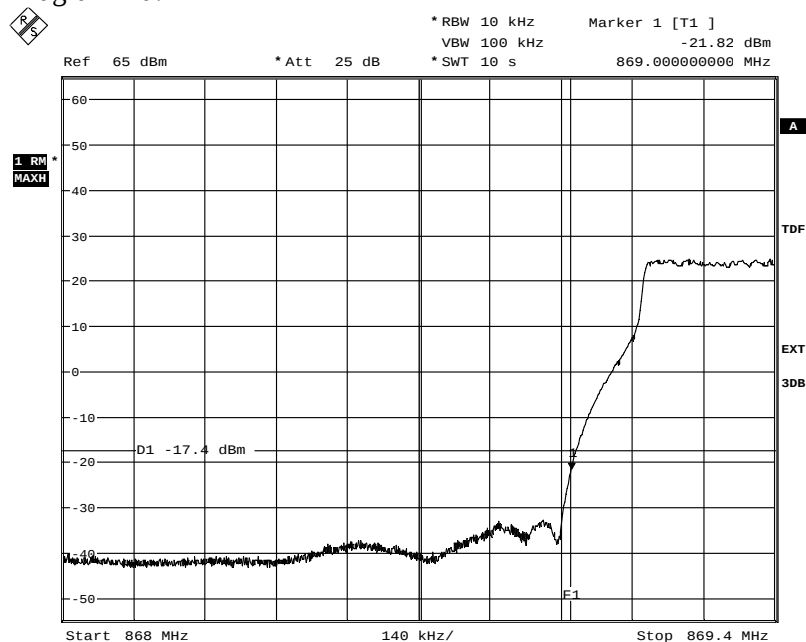

Date: 30.AUG.2013 13:38:15


Diagram 1 b:

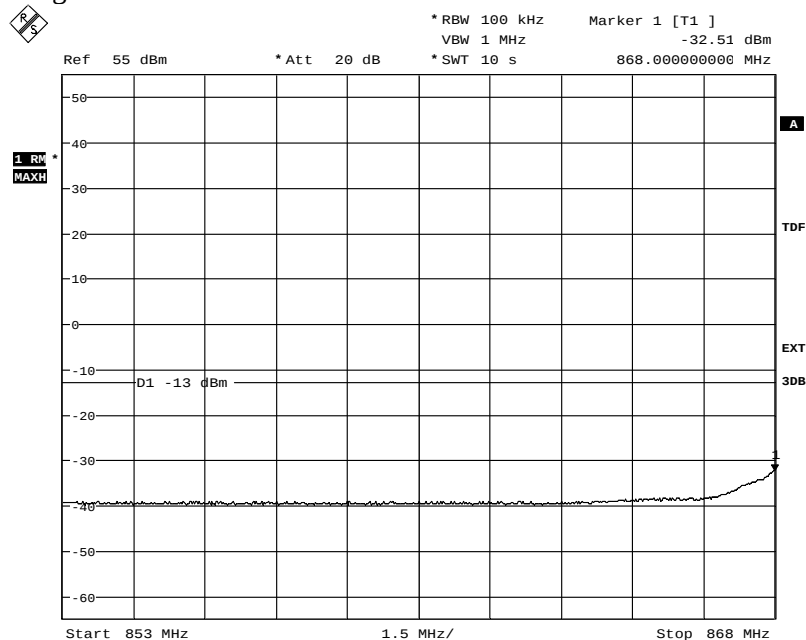

Date: 30.AUG.2013 13:33:53


Appendix 4

Diagram 2 a:

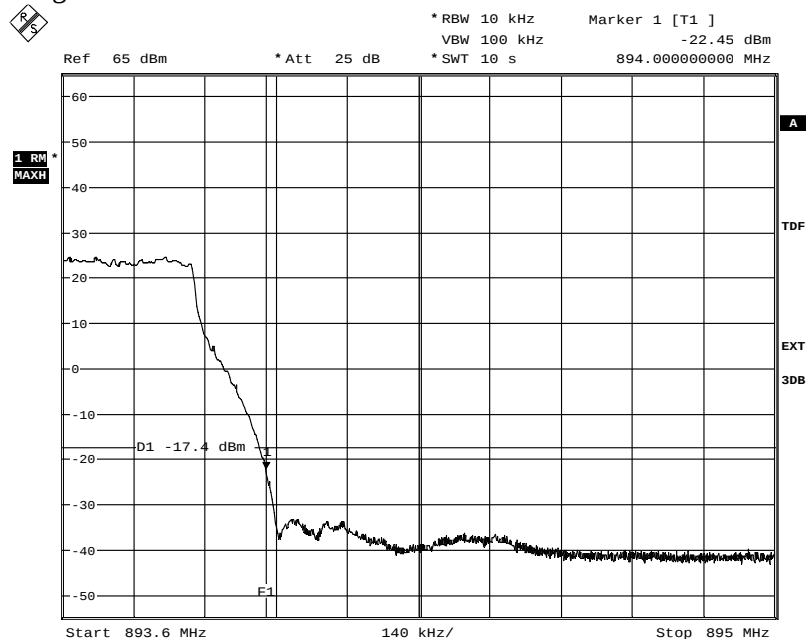

Date: 30.AUG.2013 13:40:18


Diagram 2 b:

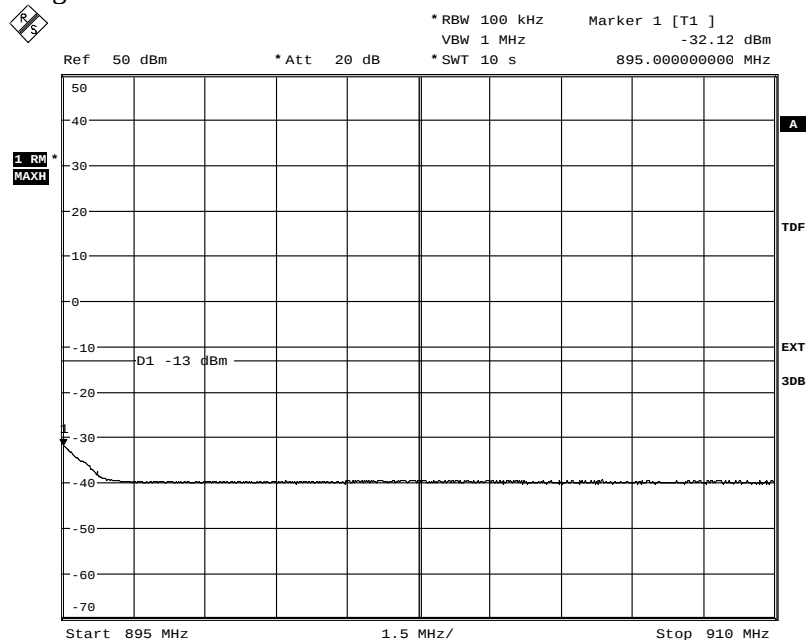

Date: 30.AUG.2013 13:41:11


Appendix 4

Diagram 3 a:

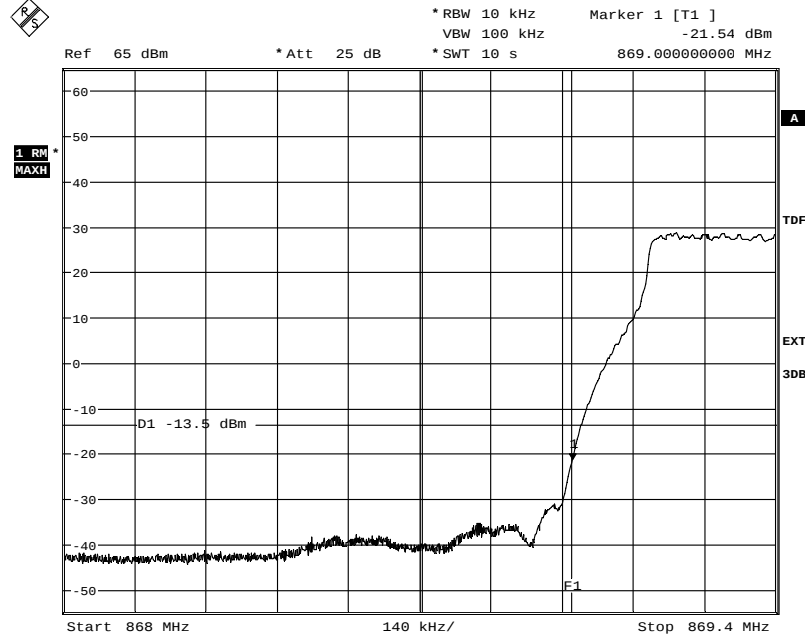

Date: 30.AUG.2013 15:35:46


Diagram 3 b:

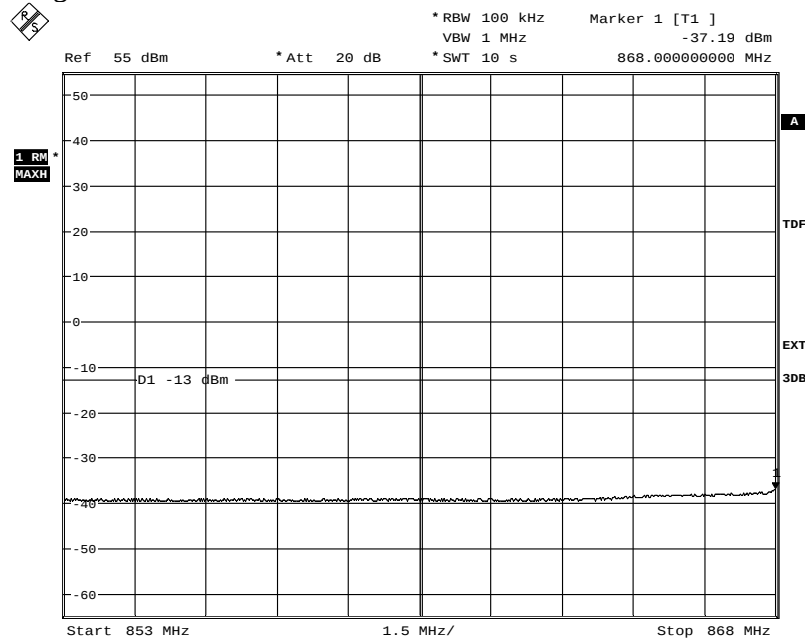

Date: 30.AUG.2013 15:36:59


Appendix 4

Diagram 4 a:

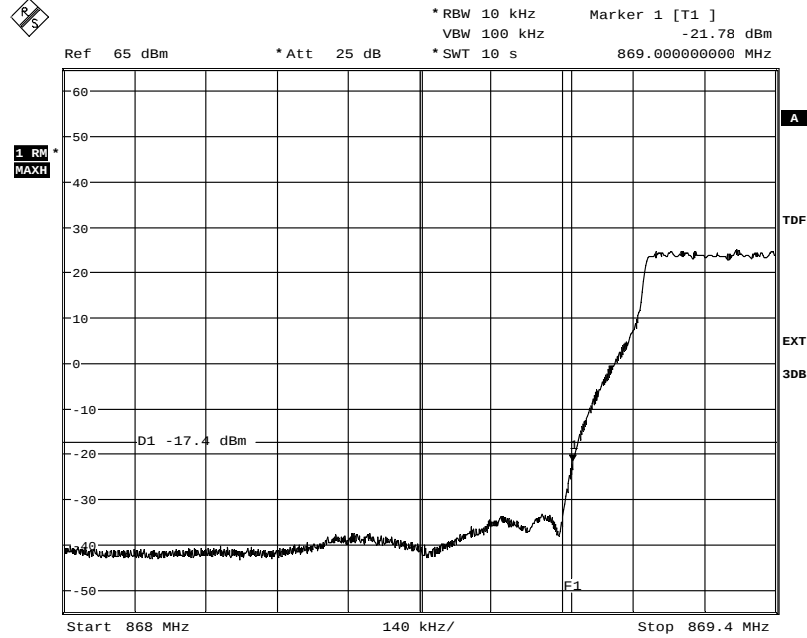

Date: 30.AUG.2013 15:34:27


Diagram 4 b:

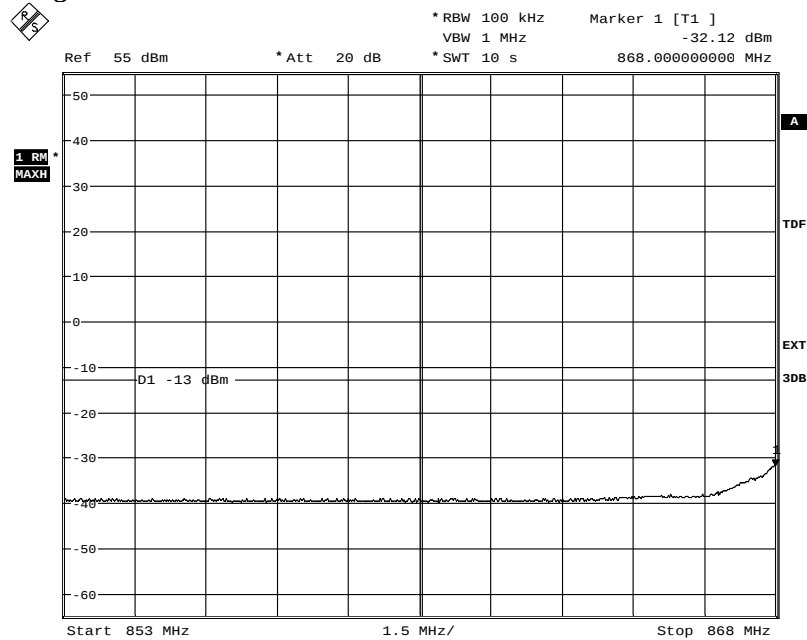

Date: 30.AUG.2013 15:32:59


Appendix 4

Diagram 5 a:

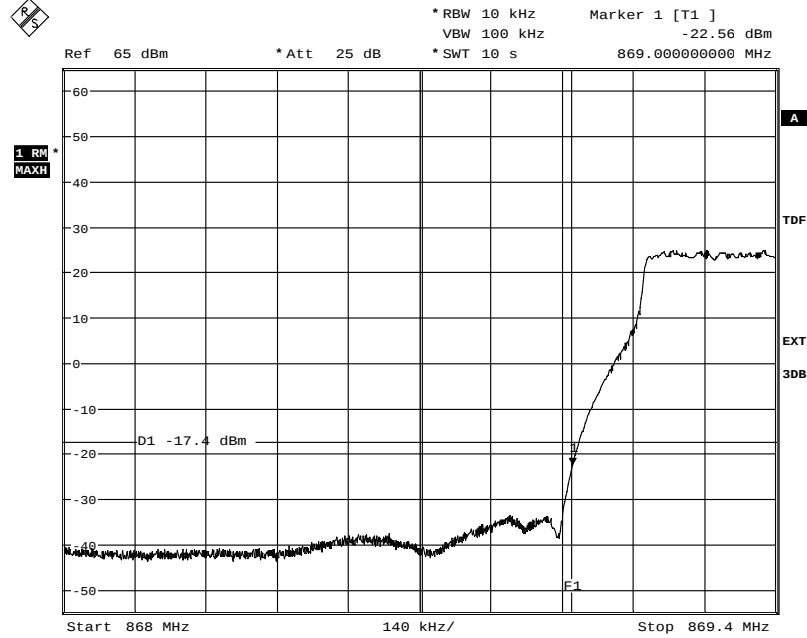

Date: 30.AUG.2013 15:39:52


Diagram 5 b:

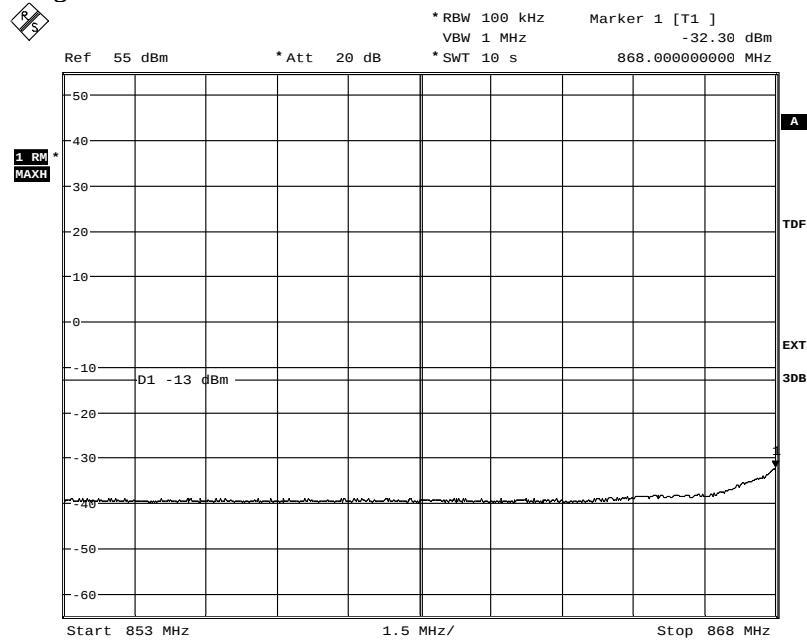

Date: 30.AUG.2013 15:38:41


Appendix 4

Diagram 6 a:

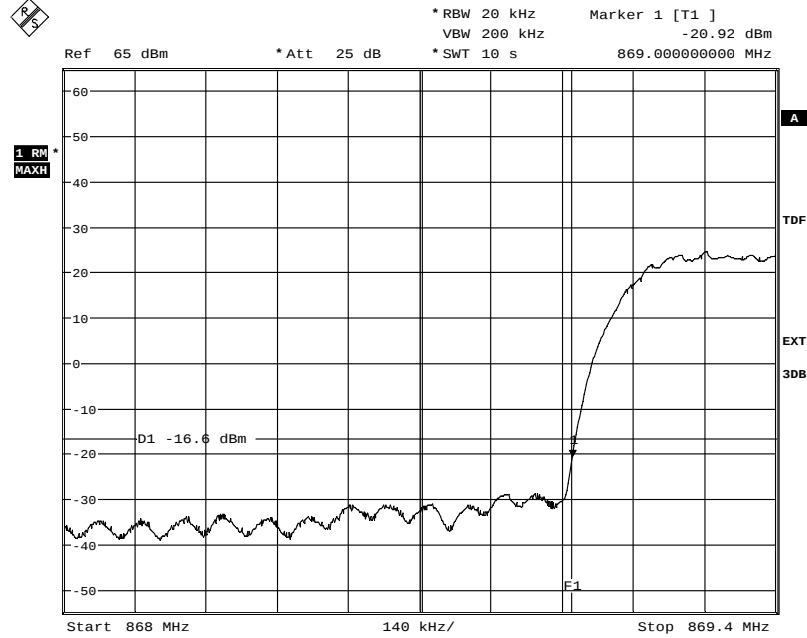

Date: 29.AUG.2013 09:56:01


Diagram 6 b:

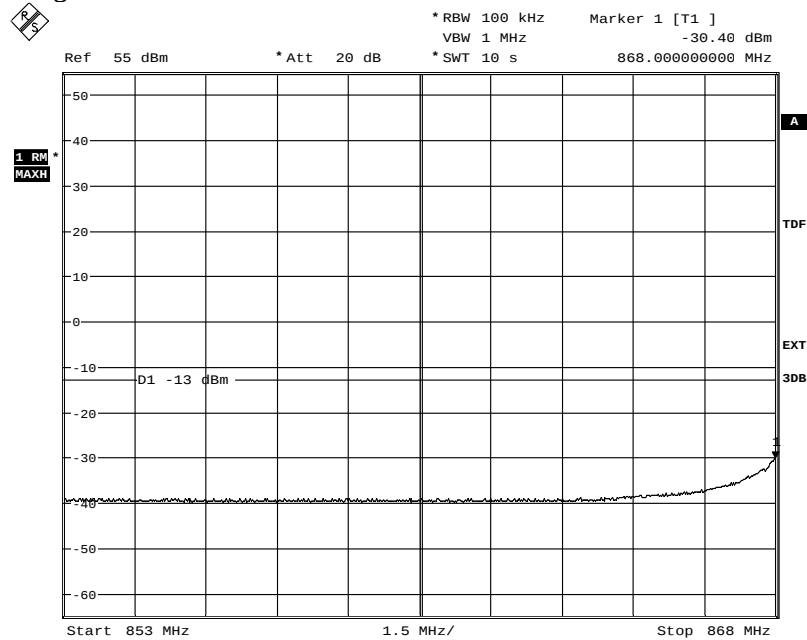

Date: 29.AUG.2013 09:56:57


Appendix 4

Diagram 7 a:

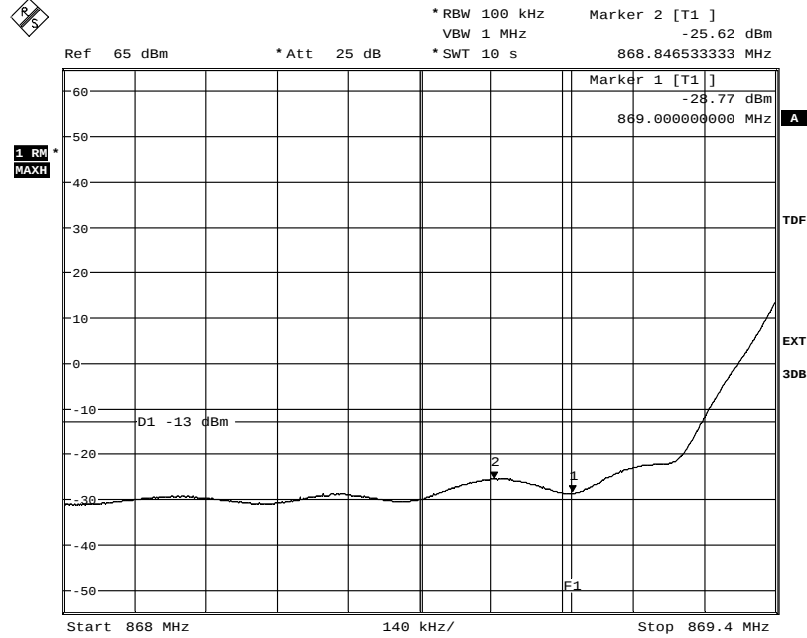

Date: 29.AUG.2013 10:14:52


Diagram 7 b:

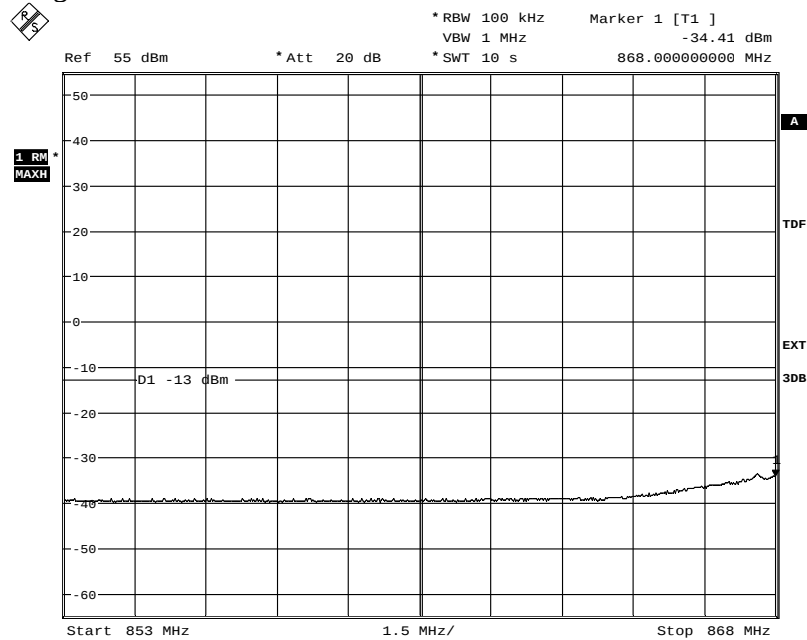

Date: 29.AUG.2013 10:01:50


Appendix 4

Diagram 8 a:

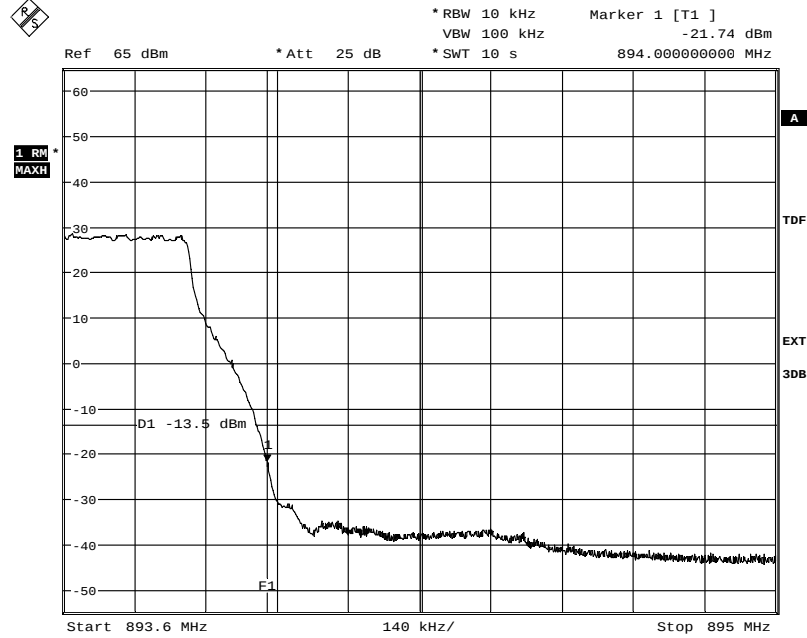

Date: 30.AUG.2013 15:21:33


Diagram 8 b:

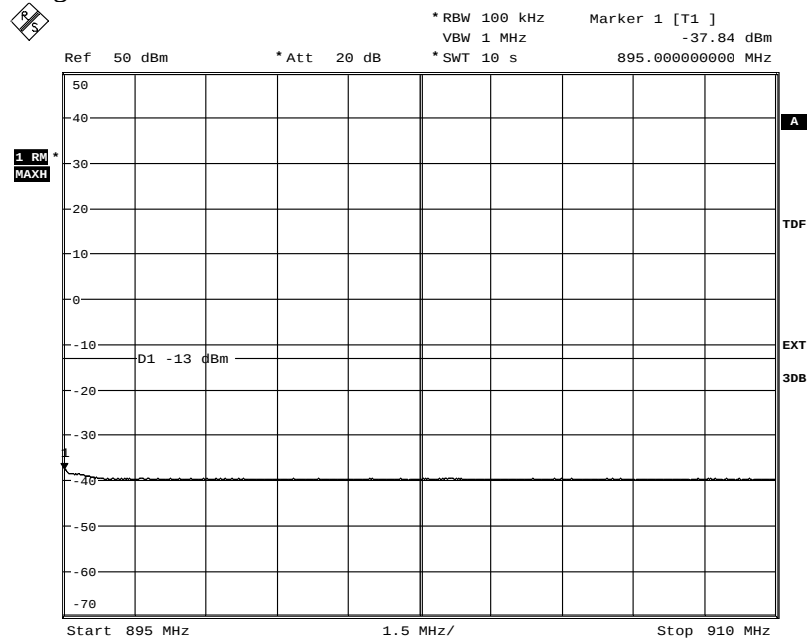

Date: 30.AUG.2013 15:24:29


Appendix 4

Diagram 9 a:

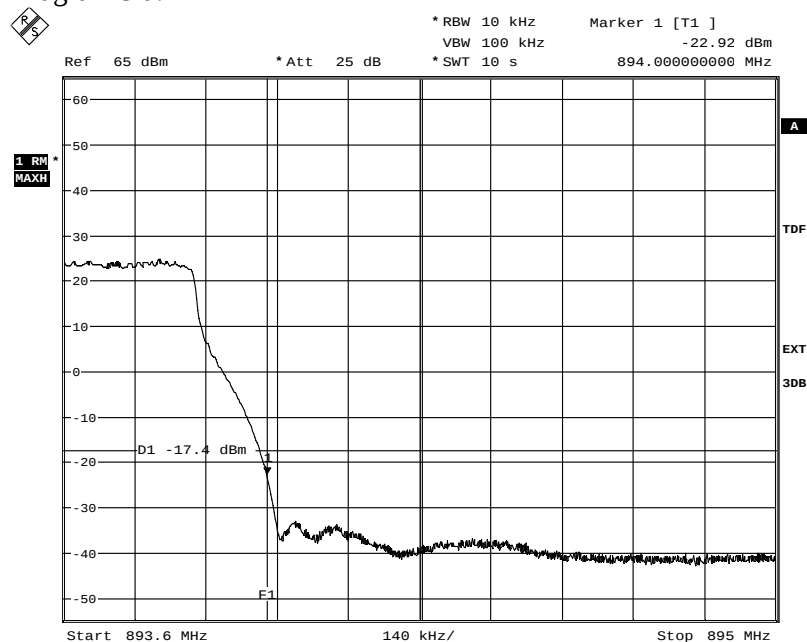

Date: 30.AUG.2013 15:30:36


Diagram 9 b:

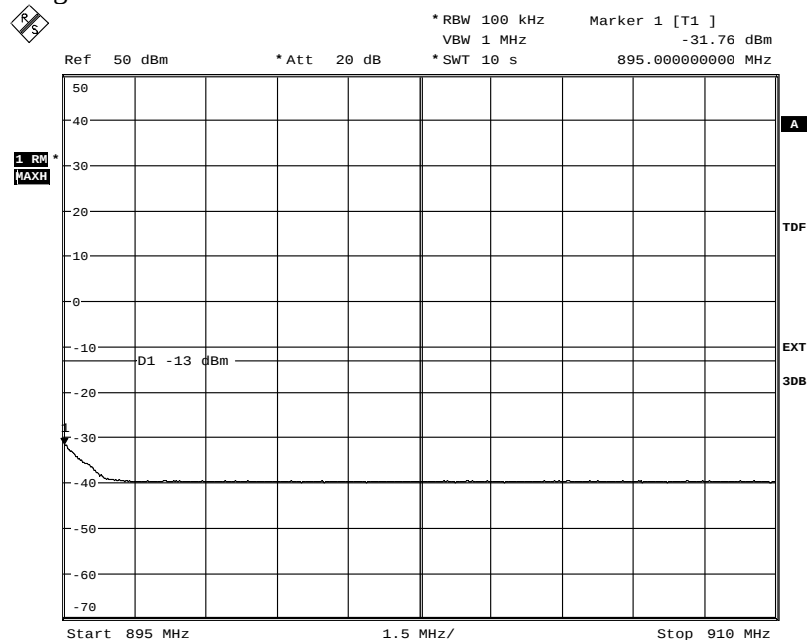

Date: 30.AUG.2013 15:27:26


Appendix 4

Diagram 10 a:

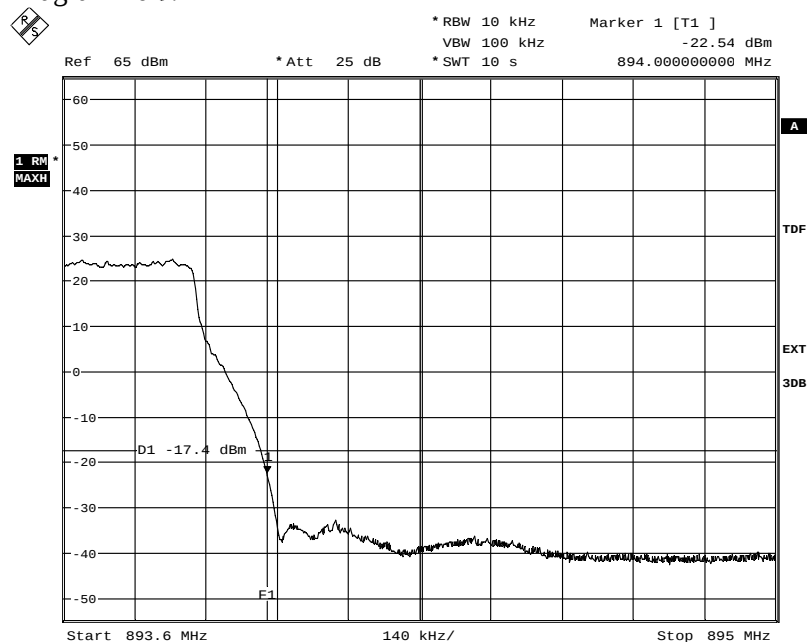

Date: 30.AUG.2013 15:42:38


Diagram 10 b:

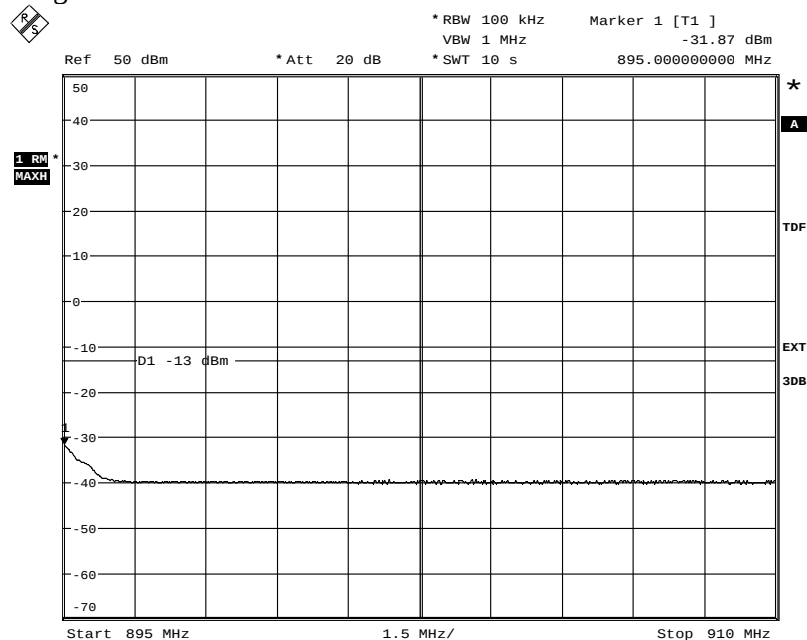

Date: 30.AUG.2013 15:43:24


Appendix 4

Diagram 11 a:

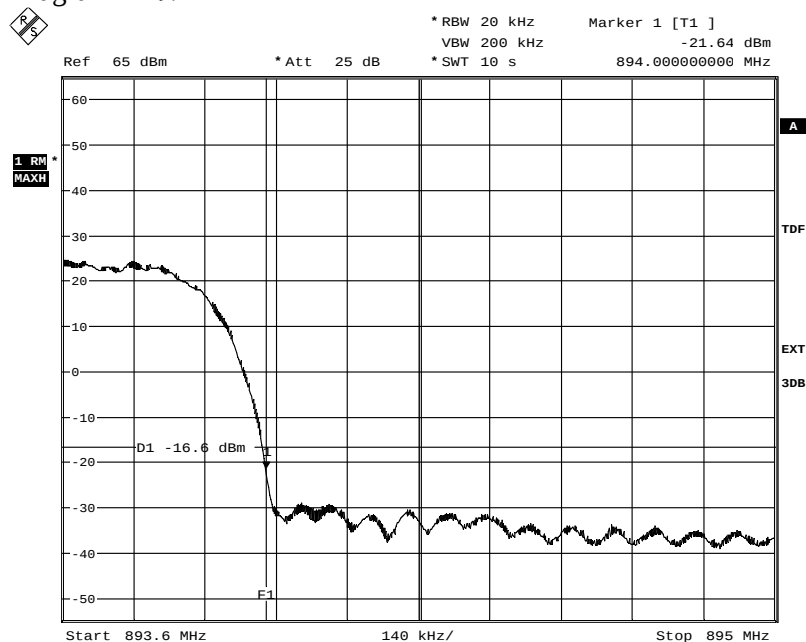

Date: 29.AUG.2013 09:50:36

Diagram 11 b:

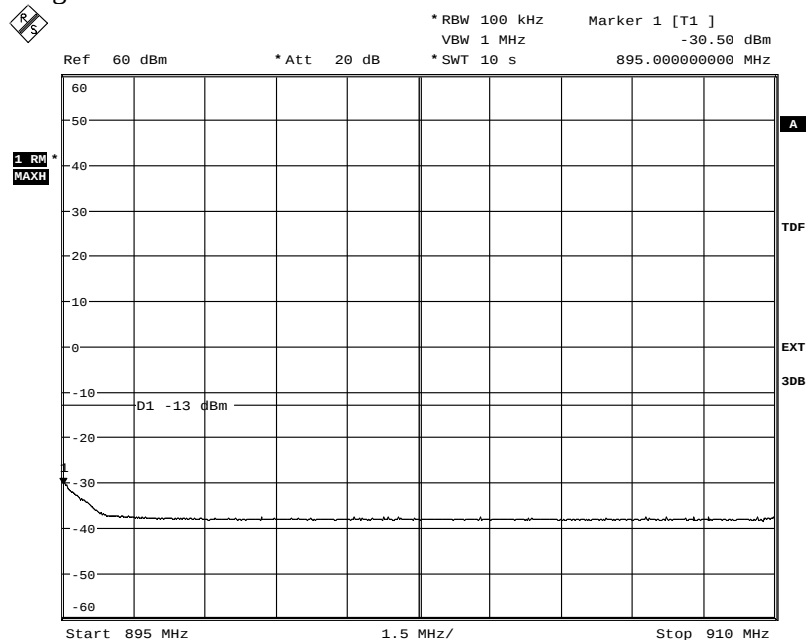


Date: 29.AUG.2013 09:51:43




Appendix 4

Diagram 12 a:

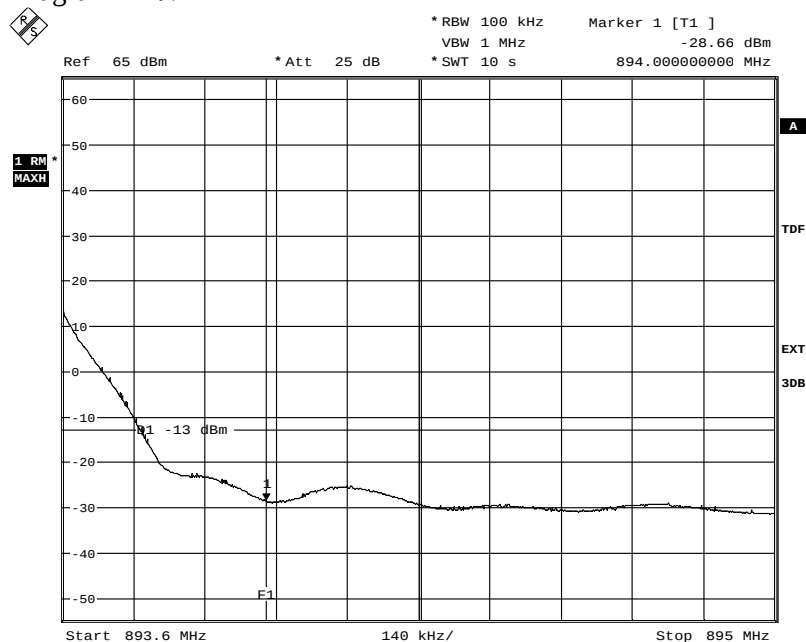

Date: 29.AUG.2013 09:44:21


Diagram 12 b:

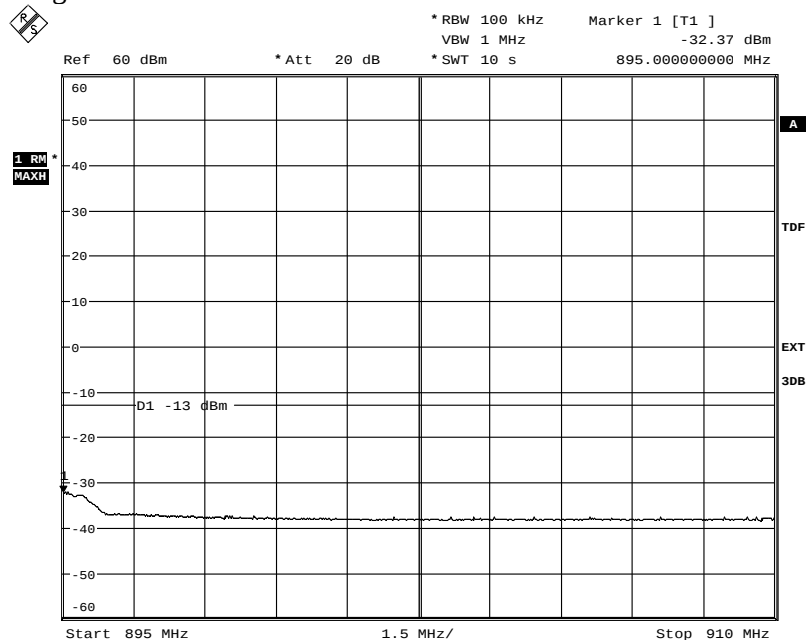

Date: 29.AUG.2013 09:43:06


Appendix 4

Diagram 13 a:

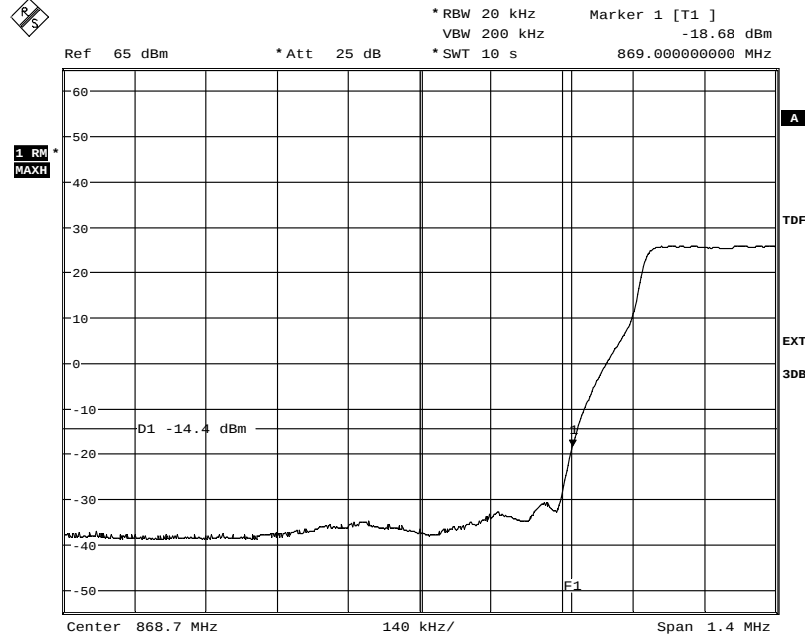

Date: 29.AUG.2013 15:02:02


Diagram 13 b:

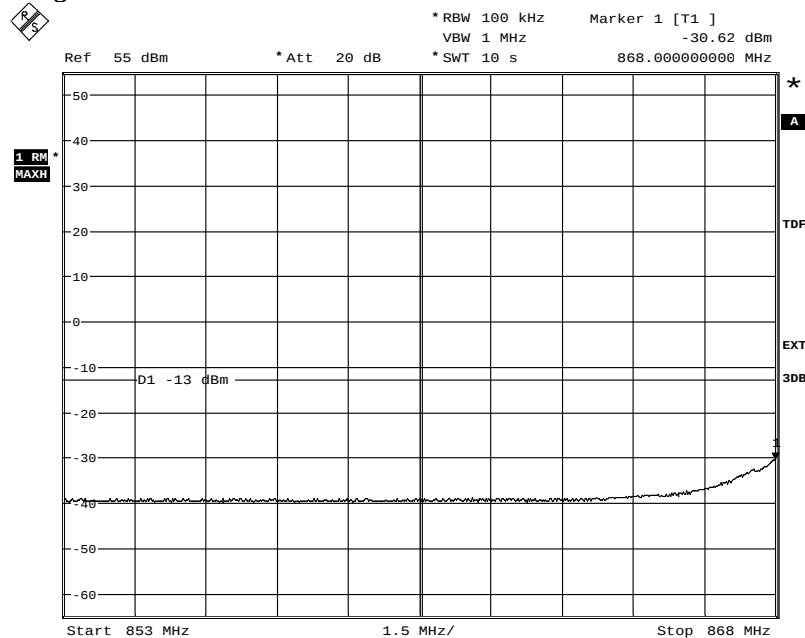

Date: 29.AUG.2013 15:17:18


Appendix 4

Diagram 14 a:

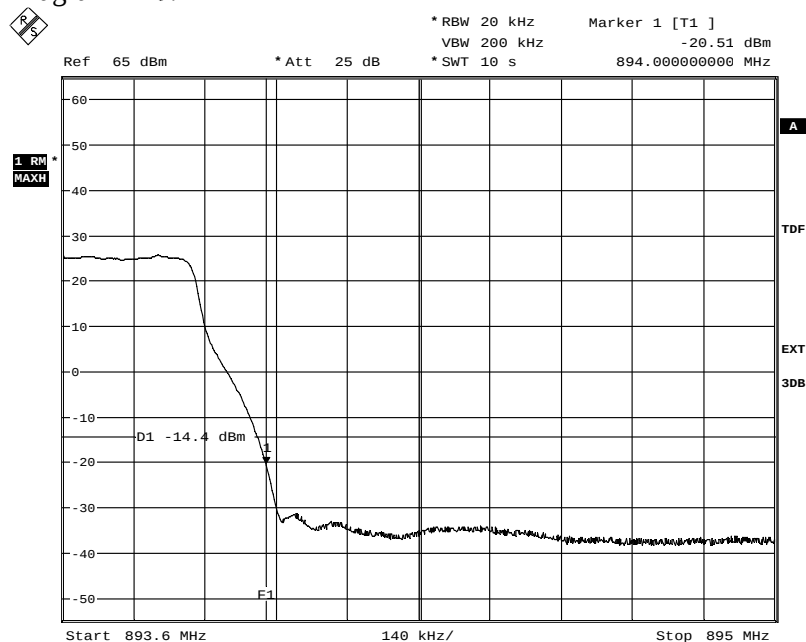

Date: 29.AUG.2013 16:42:52

Diagram 14 b:

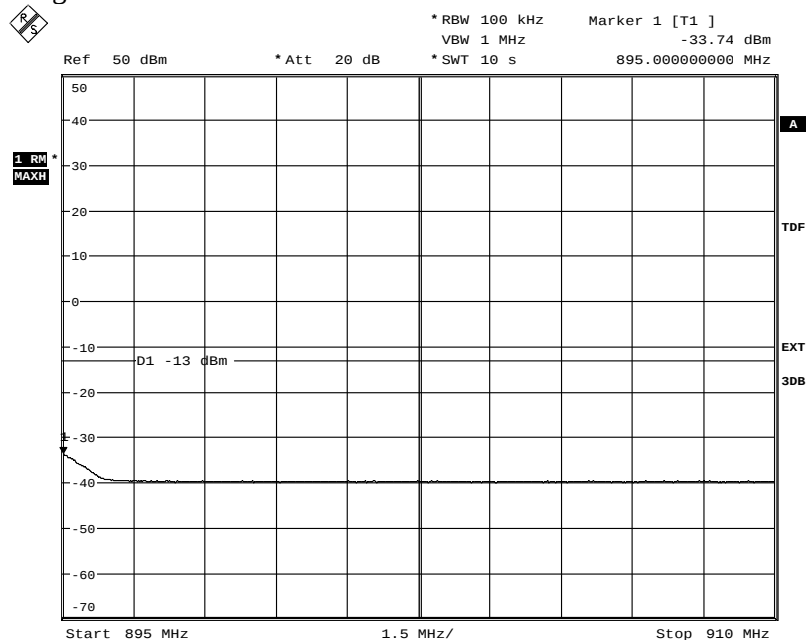

Date: 29.AUG.2013 16:50:44

Appendix 5

Conducted spurious emission measurements according to CFR 47 2.1051 / IC RSS-132 5.5

Date	Temperature	Humidity
2013-08-28	23 °C ± 3 °C	43% ± 5 %
2013-08-29	23 °C ± 3 °C	46% ± 5 %
2013-08-30	23 °C ± 3 °C	52% ± 5 %
2013-09-16	23 °C ± 3 °C	44% ± 5 %

Test set-up and procedure

The measurements were made per definition in § 22.917, but with a conservative 1 MHz RBW. The output was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method E), 3, (iii) measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v02

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	901 508
High pass filter	901 501
Testo 635 temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 5

Results

Single carrier

Diagram	BW configuration	Tested frequency	Tested mode
1 a+b	1.4 MHz	M	Primary
2 a+b	5 MHz	M	Primary

Single carrier MIMO

Diagram	BW configuration	Tested frequency	Tested mode
3 a+b	1.4 MHz	B	Primary
4 a+b	10 MHz	B	Primary
5 a+b	1.4 MHz	M	Primary
6 a+b	1.4 MHz	M	Secondary
7 a+b	3 MHz	M	Primary
8 a+b	5 MHz	M	Primary
9 a+b	10 MHz	M	Primary
10 a+b	10 MHz	M	Secondary
11 a+b	1.4 MHz	T	Primary
12 a+b	10 MHz	T	Primary

Multi carrier MIMO

Diagram	BW configuration	Tested frequency	Tested mode
13 a+b+c	1.4 MHz	Bim2	Primary
14 a+b	1.4 MHz	M2	Primary
15 a+b+c	1.4 MHz	Tim2	Primary
16 a+b+c	1.4 MHz	Bim3	Primary
17 a+b+c	1.4 MHz	Tim3	Primary

Note: Measurements were limited to port RUS 1 due to the measurement result in LTE single carrier MIMO mode that shows that the ports are electrical identical as declared by the client.

Remarks

The emission at 9 kHz on some of the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

Appendix 5

The upper frequency boundary covers 10x the highest TX fundamental frequency.
The highest fundamental frequency is 894MHz. The measurements were made up to 9 GHz
(10x894 MHz = 8.94 GHz).

Limits


CFR 47 § 22.917: Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 100 kHz RBW.

IC RSS-132 5.5.1.2: Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB per any 100 kHz RBW.

Complies?	Yes
-----------	-----


Appendix 5

Diagram 1 a:

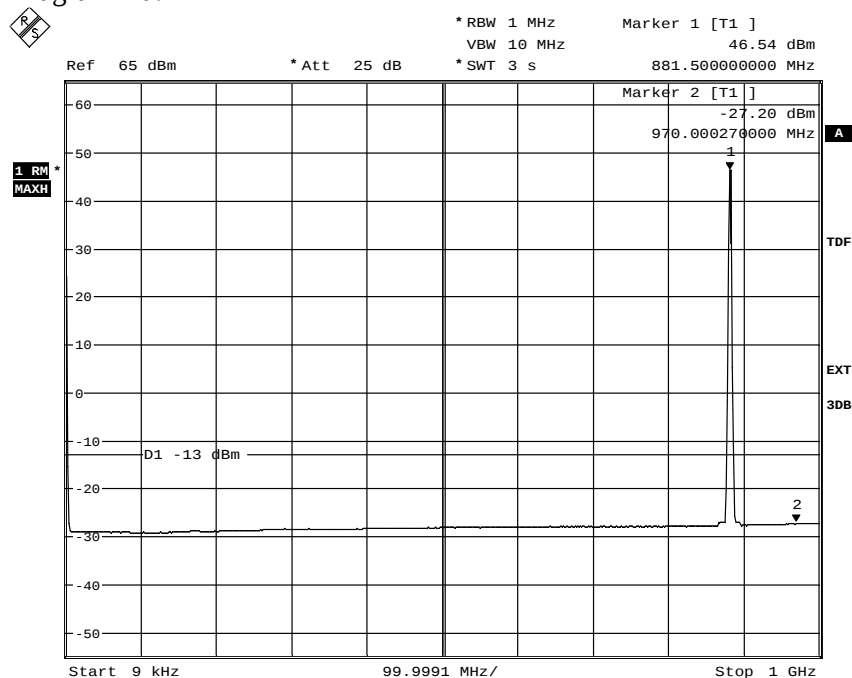

Date: 30.AUG.2013 13:46:01


Diagram 1 b:

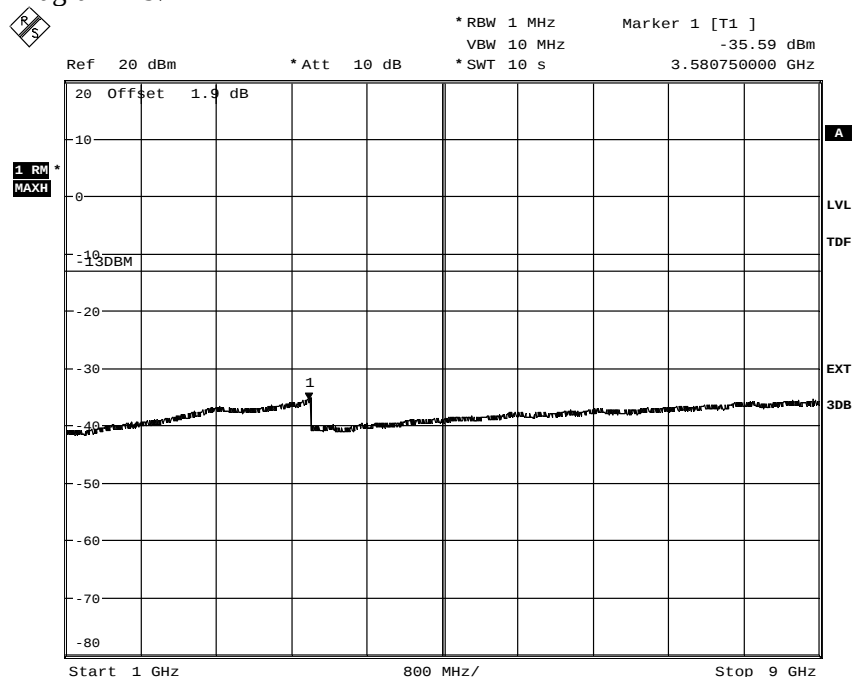

Date: 30.AUG.2013 13:50:42


Appendix 5

Diagram 2 a:

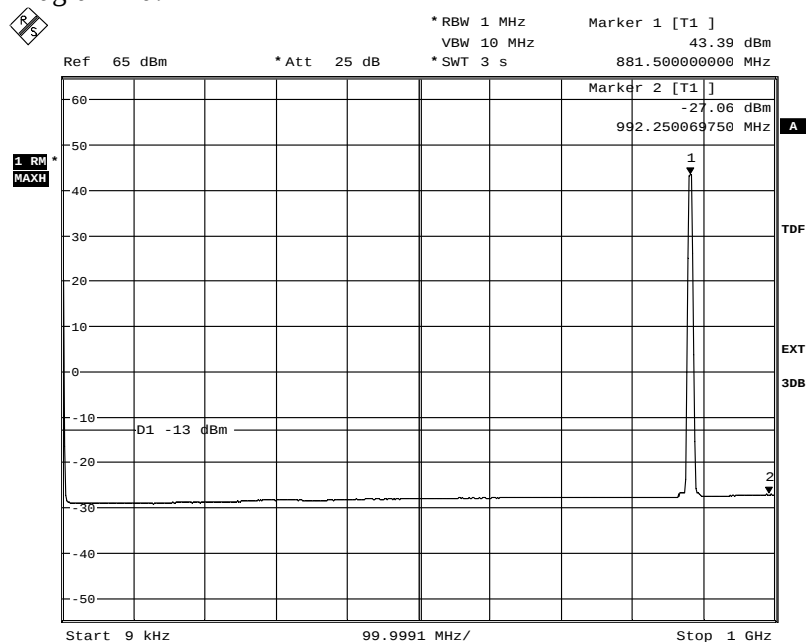

Date: 29.AUG.2013 13:36:35


Diagram 2 b:

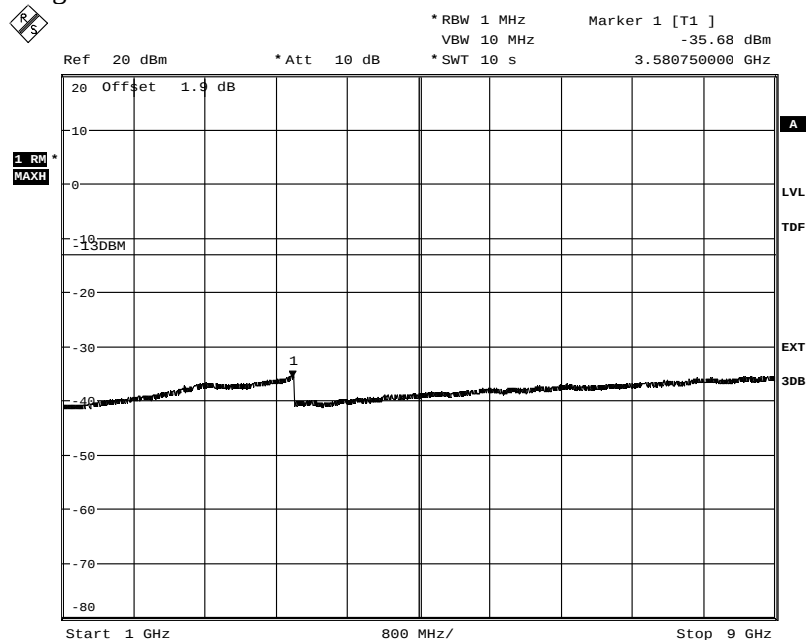

Date: 29.AUG.2013 13:38:40


Appendix 5

Diagram 3 a:

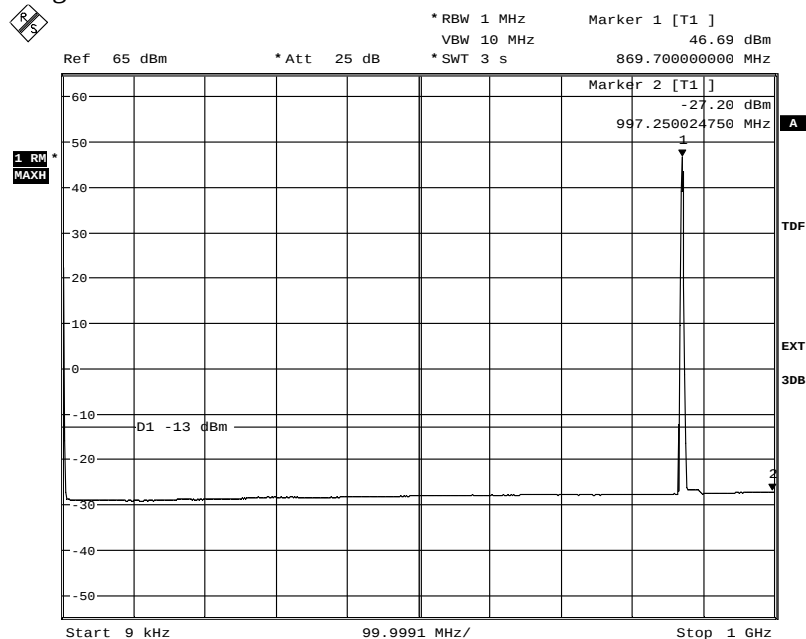

Date: 30.AUG.2013 15:51:08


Diagram 3 b:

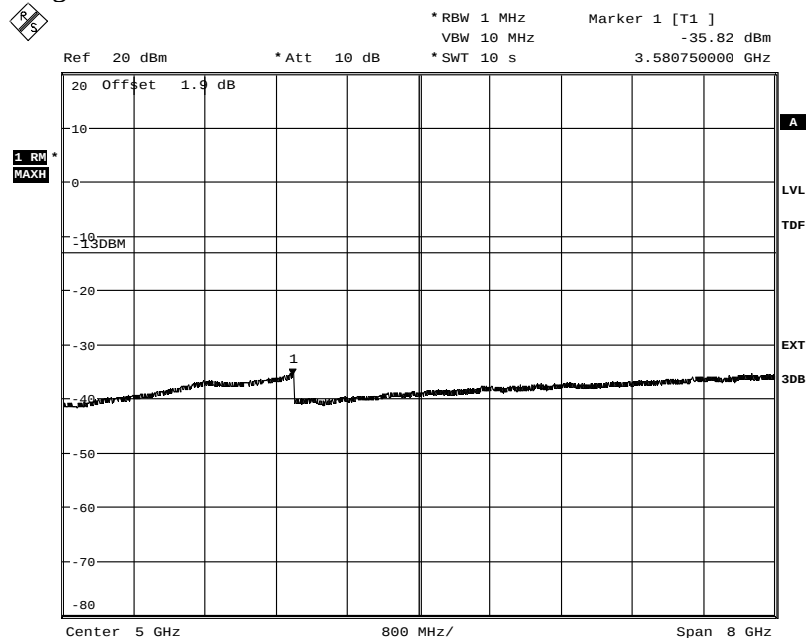

Date: 30.AUG.2013 15:53:19


Appendix 5

Diagram 4 a:

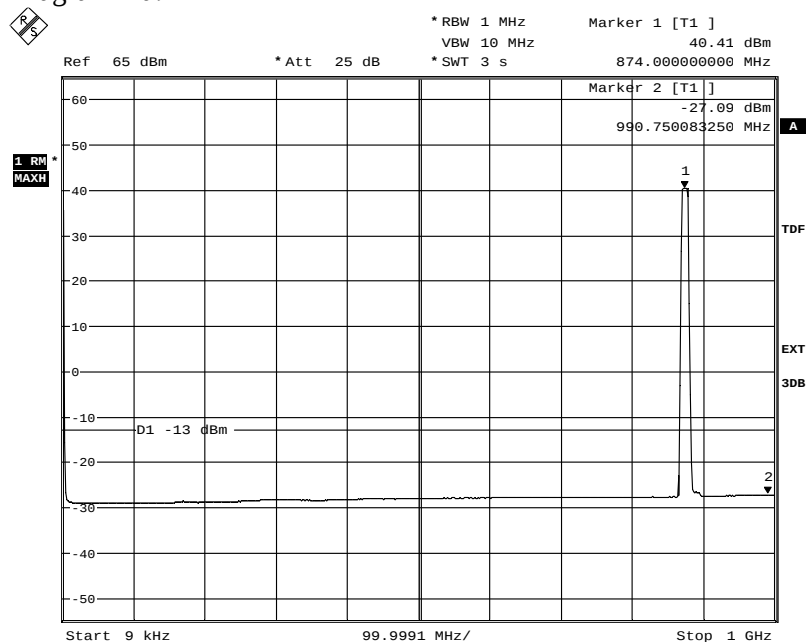

Date: 29.AUG.2013 11:24:23


Diagram 4 b:

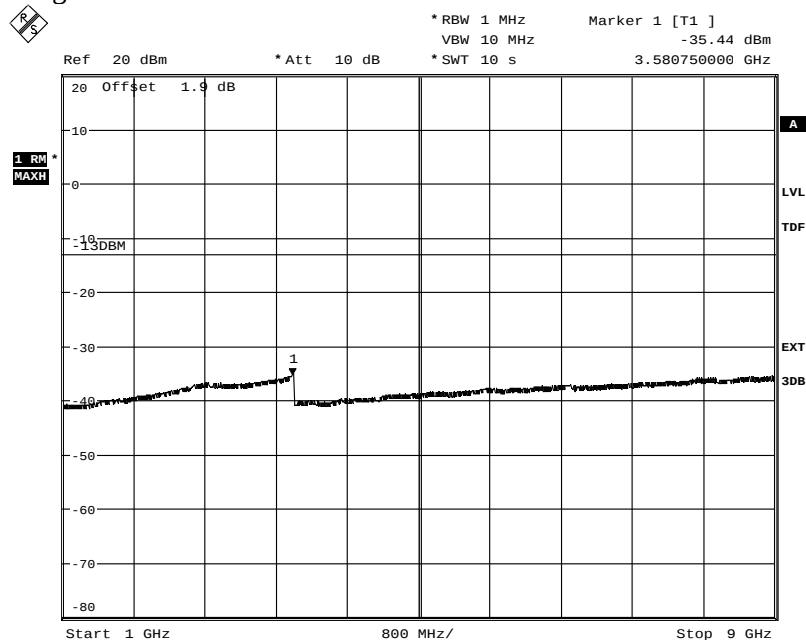

Date: 29.AUG.2013 11:17:45


Appendix 5

Diagram 5 a:

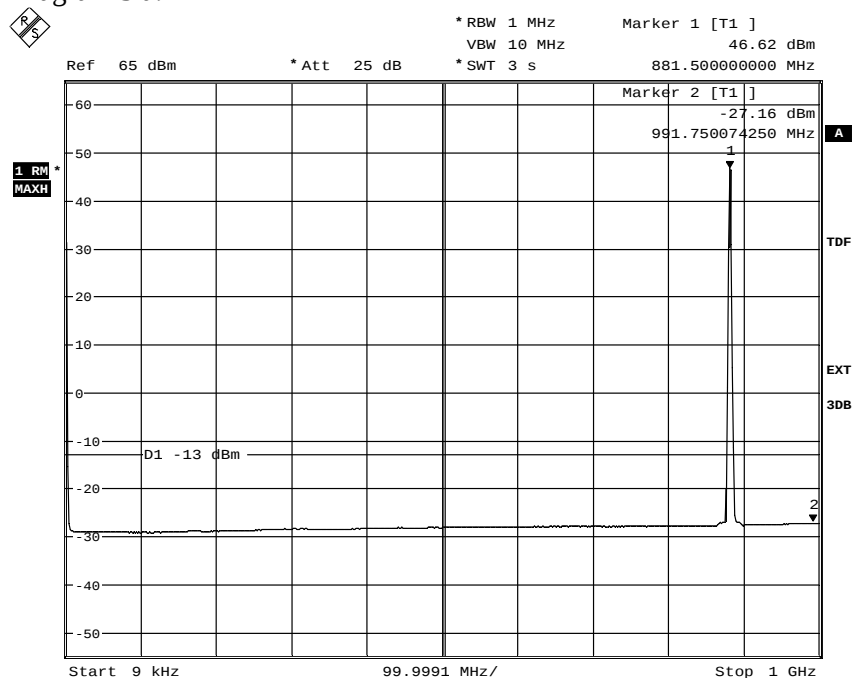

Date: 30.AUG.2013 15:56:45


Diagram 5 b:

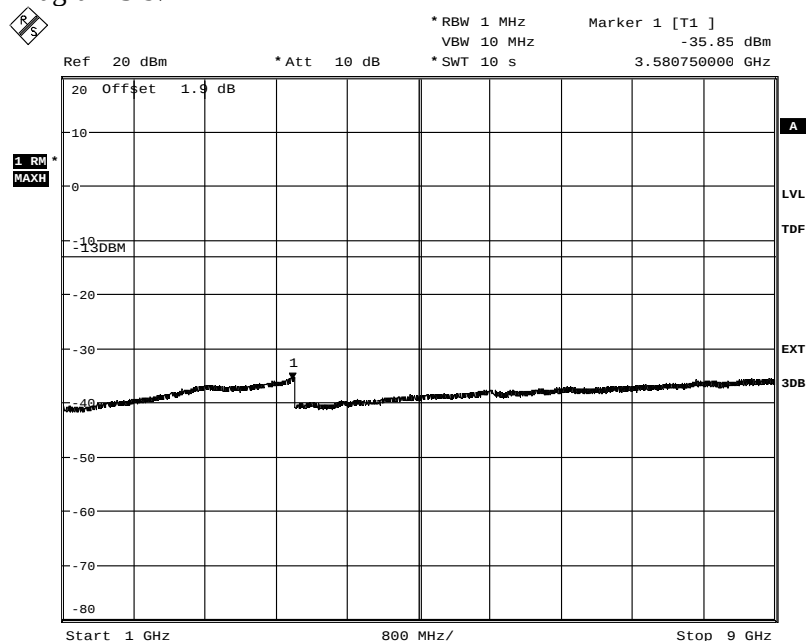

Date: 30.AUG.2013 16:01:13


Appendix 5

Diagram 6 a:

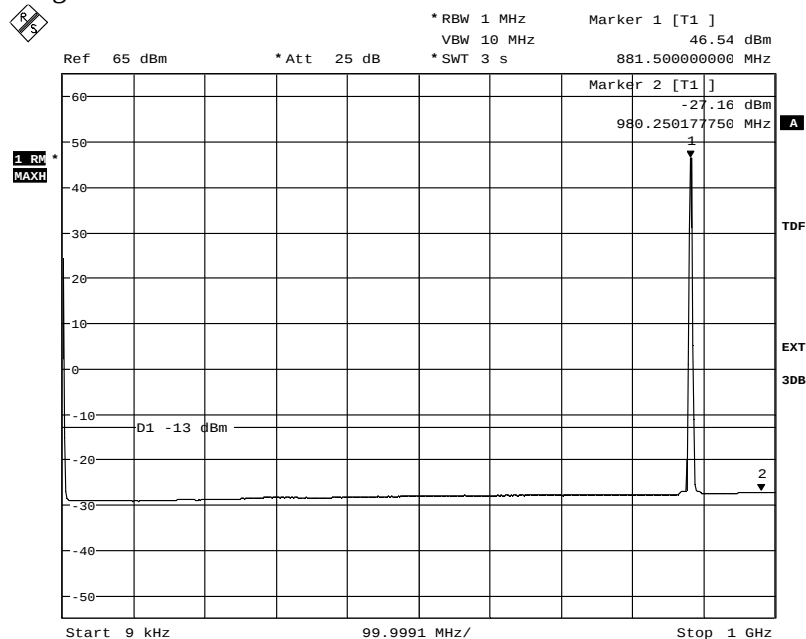

Date: 30.AUG.2013 14:42:07


Diagram 6 b:

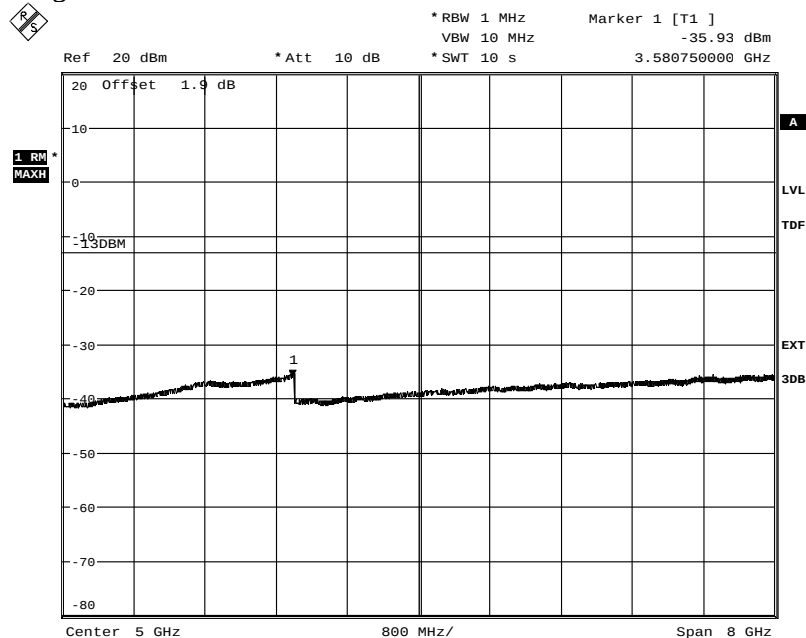

Date: 30.AUG.2013 14:44:20


Appendix 5

Diagram 7 a:

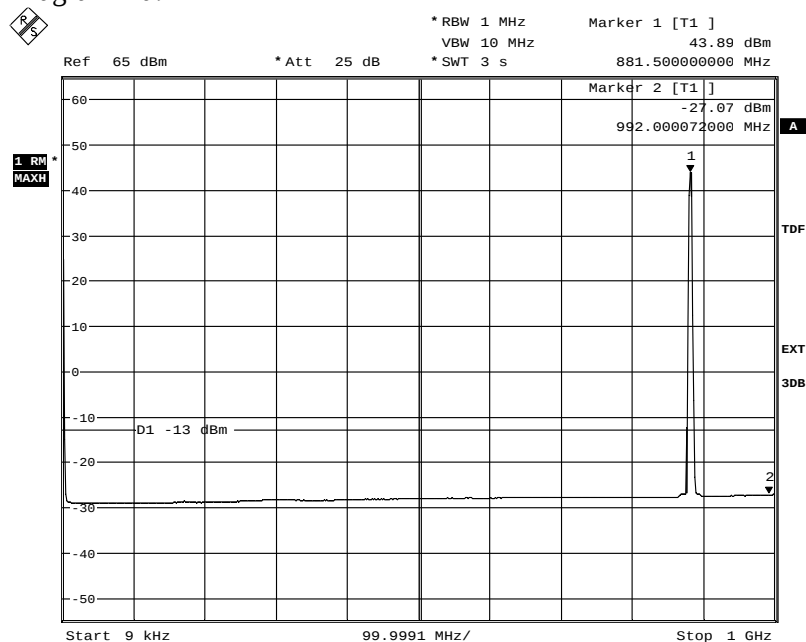

Date: 30.AUG.2013 16:04:03


Diagram 7 b:

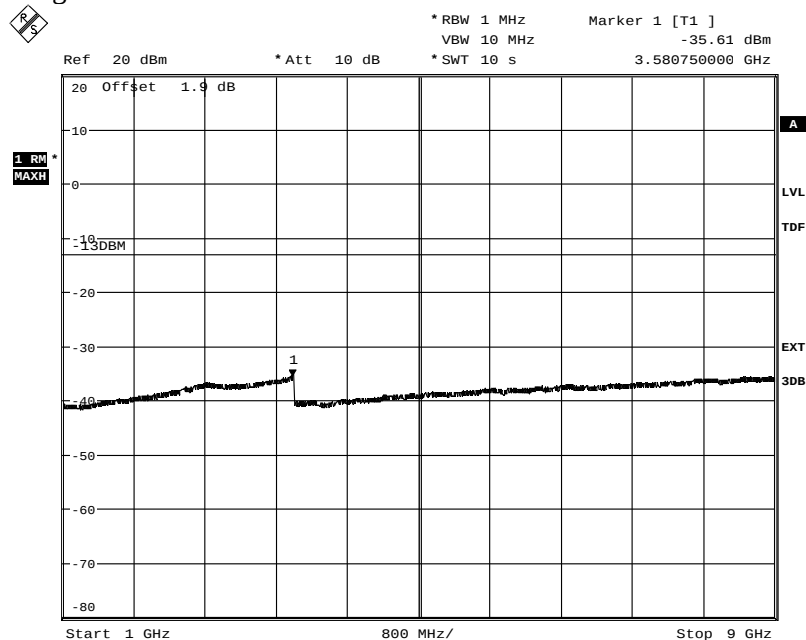

Date: 30.AUG.2013 16:02:26


Appendix 5

Diagram 8 a:

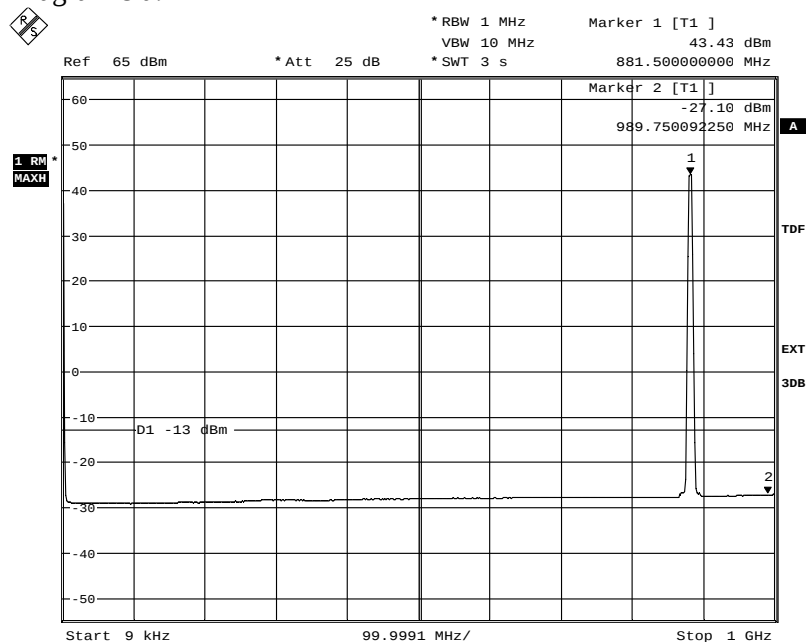

Date: 29.AUG.2013 11:35:26


Diagram 8 b:

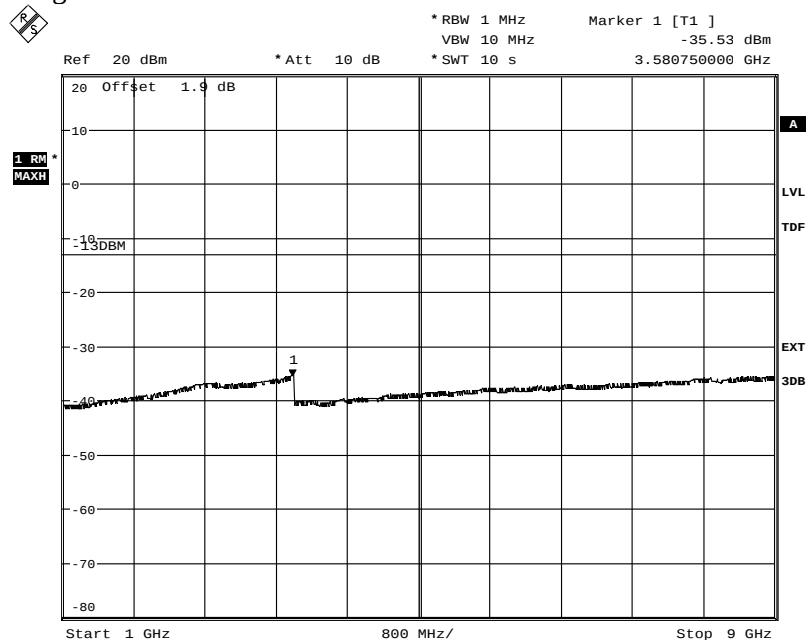

Date: 29.AUG.2013 11:13:13


Appendix 5

Diagram 9 a:

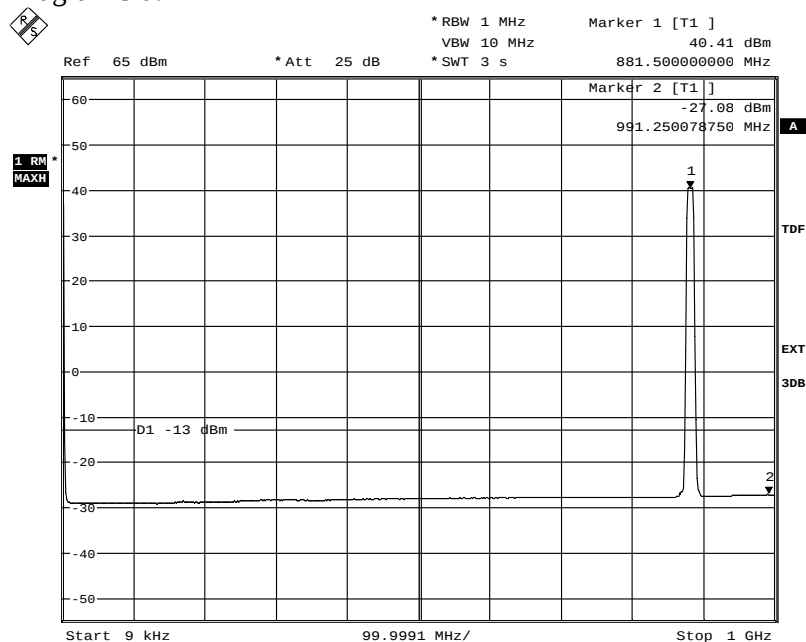

Date: 29.AUG.2013 11:21:50


Diagram 9 b:

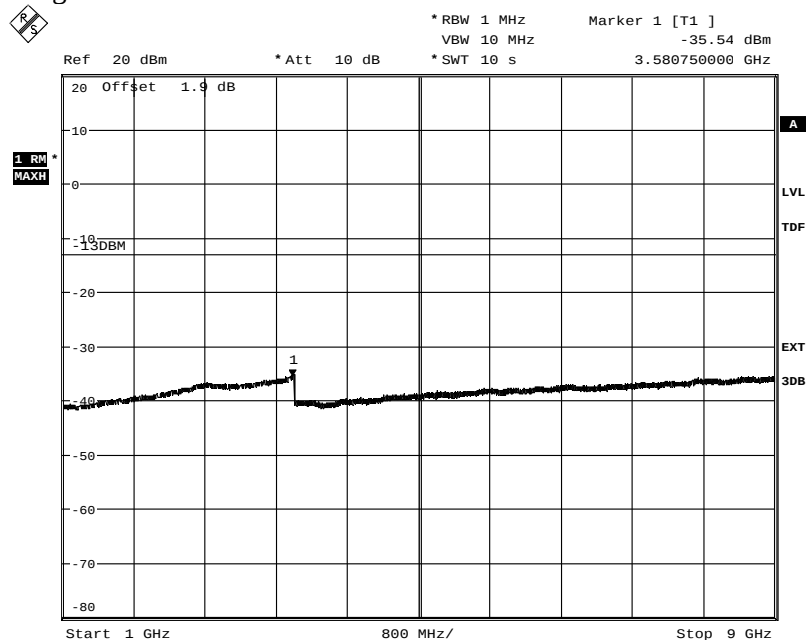

Date: 29.AUG.2013 11:14:47


Appendix 5

Diagram 10 a:

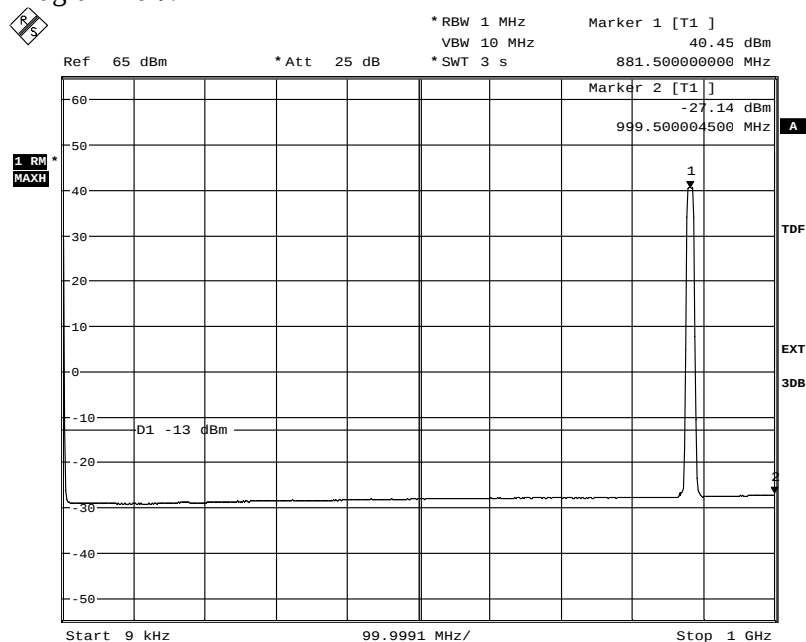

Date: 30.AUG.2013 10:45:25

Diagram 10 b:

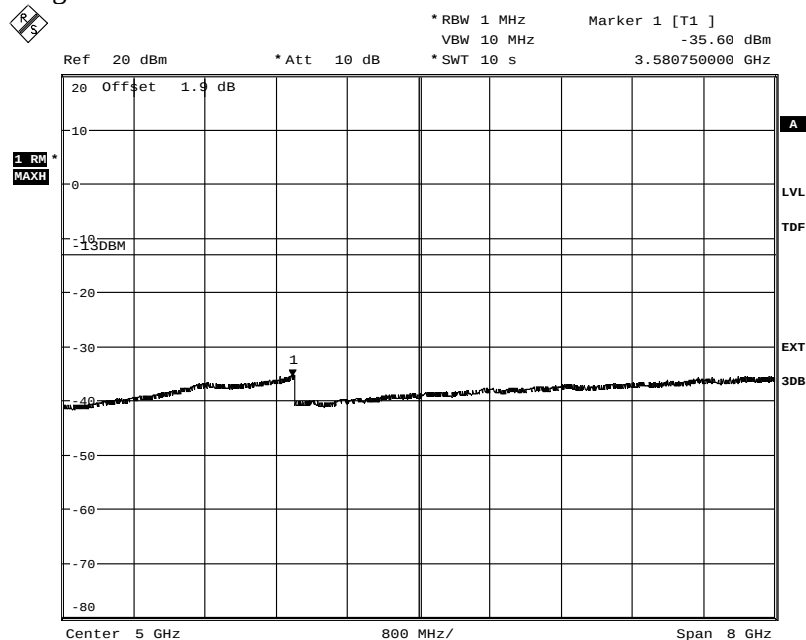


Date: 30.AUG.2013 10:42:55




Appendix 5

Diagram 11 a:

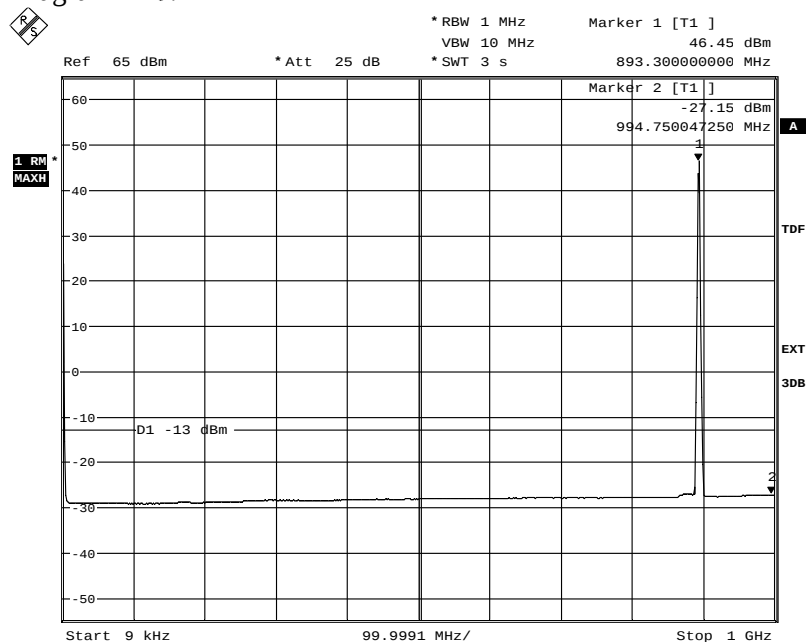

Date: 30.AUG.2013 15:58:33


Diagram 11 b:

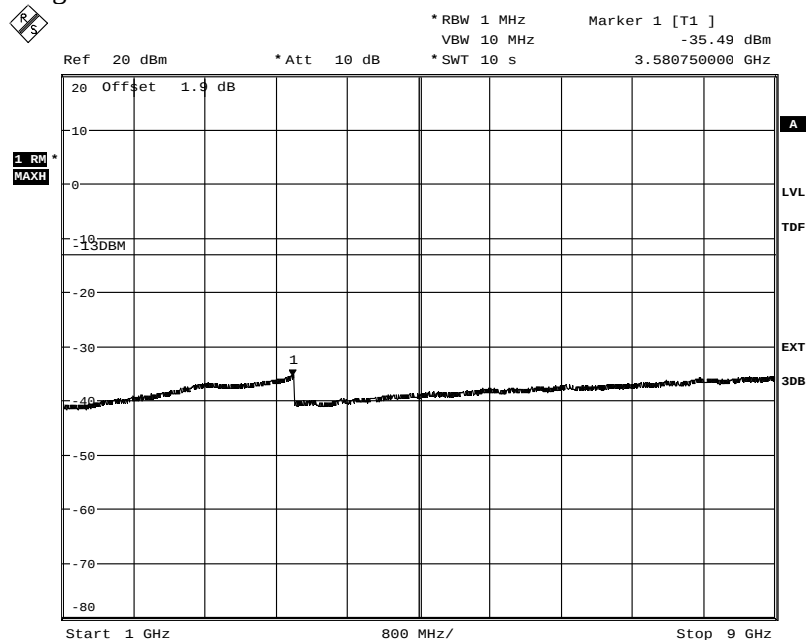

Date: 30.AUG.2013 16:00:09


Appendix 5

Diagram 12 a:

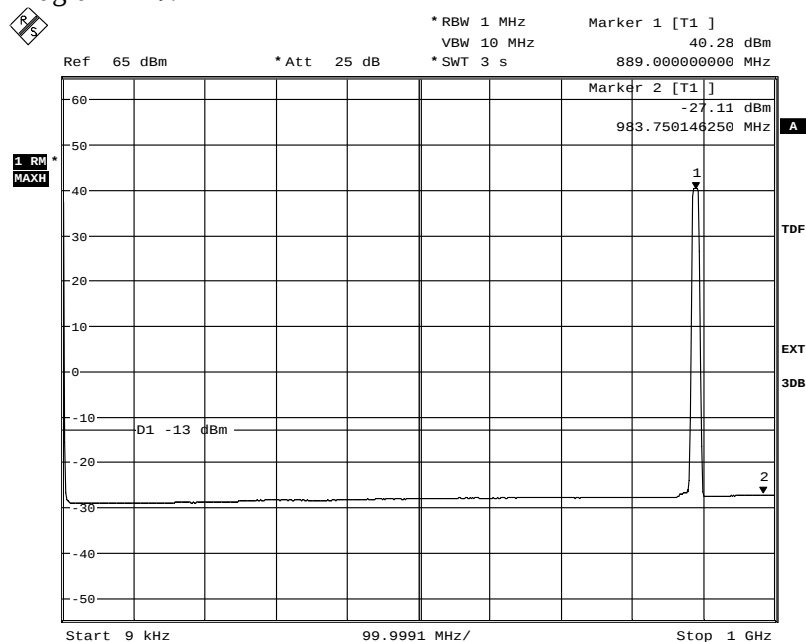

Date: 29.AUG.2013 11:22:56


Diagram 12 b:

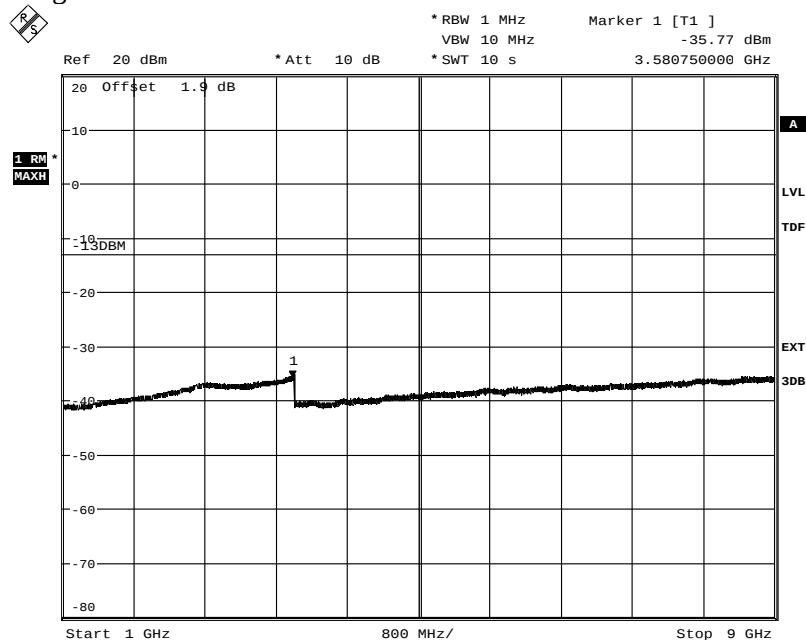

Date: 29.AUG.2013 11:18:48


Appendix 5

Diagram 13 a:

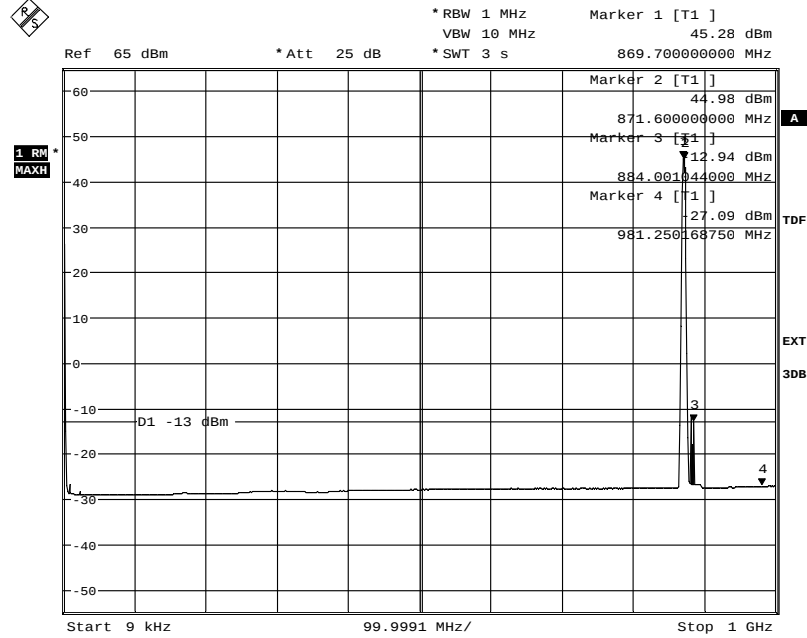

Date: 30.AUG.2013 09:42:43


Diagram 13 b:

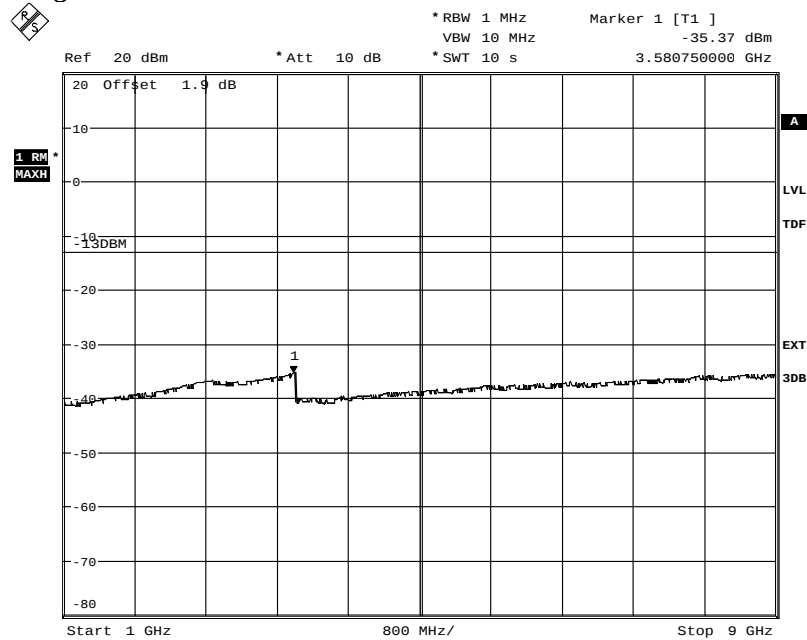

Date: 30.AUG.2013 09:39:32

Appendix 5

Diagram 13 c:

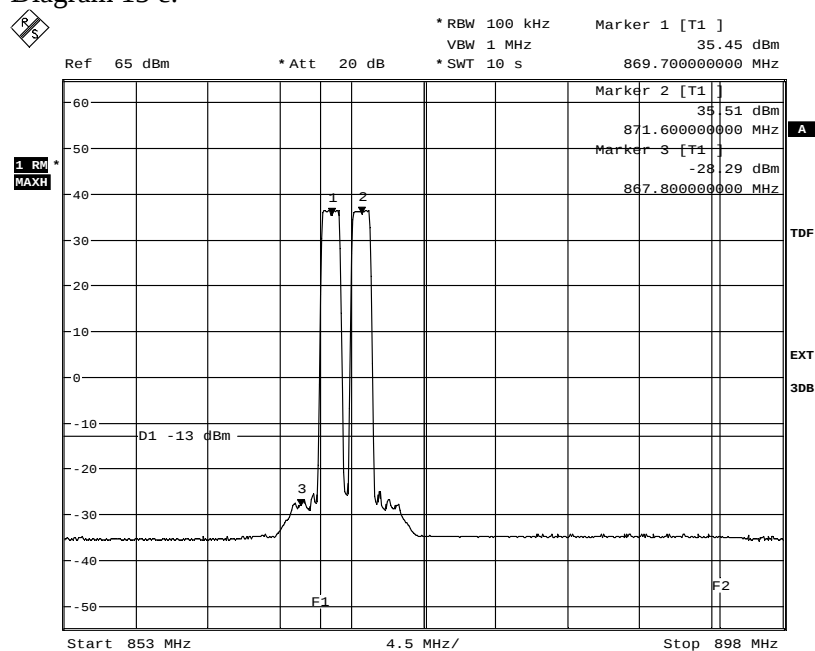


Date: 30.AUG.2013 09:49:03




Appendix 5

Diagram 14 a:

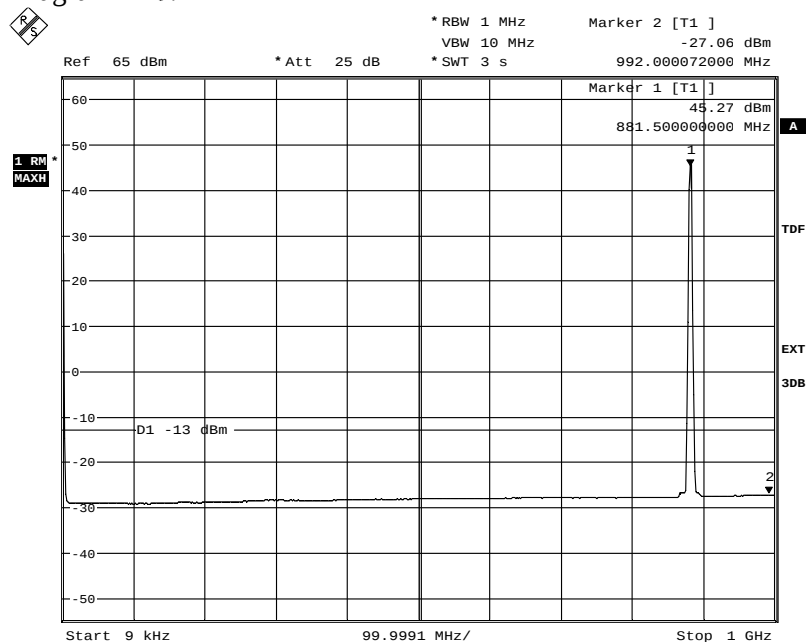

Date: 30.AUG.2013 09:19:07


Diagram 14 b:

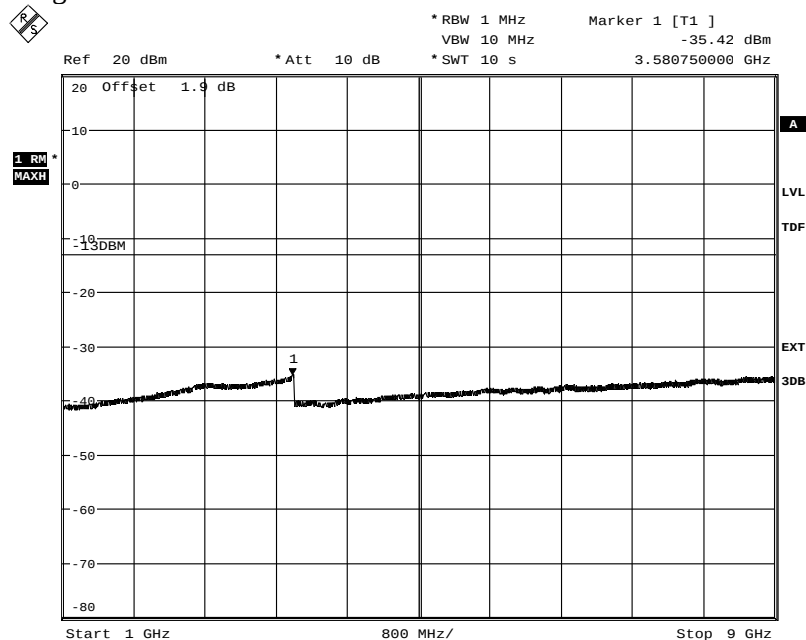

Date: 30.AUG.2013 09:23:35


Appendix 5

Diagram 15 a:

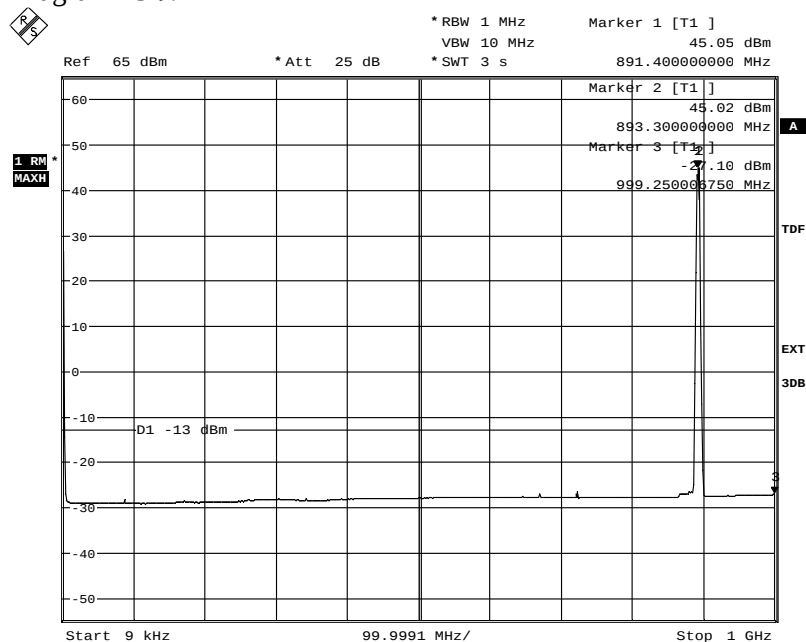

Date: 30.AUG.2013 09:27:19


Diagram 15 b:

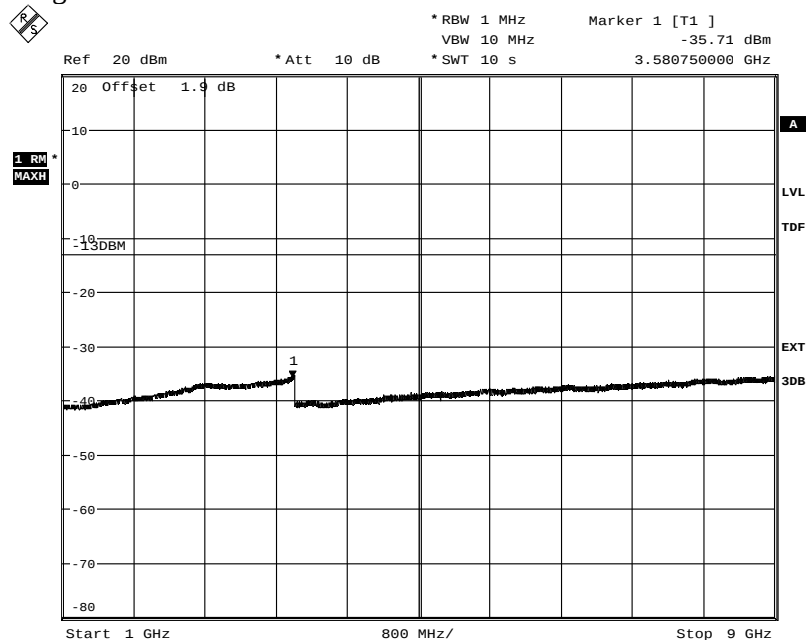

Date: 30.AUG.2013 09:25:27

Appendix 5


Diagram 15 c:

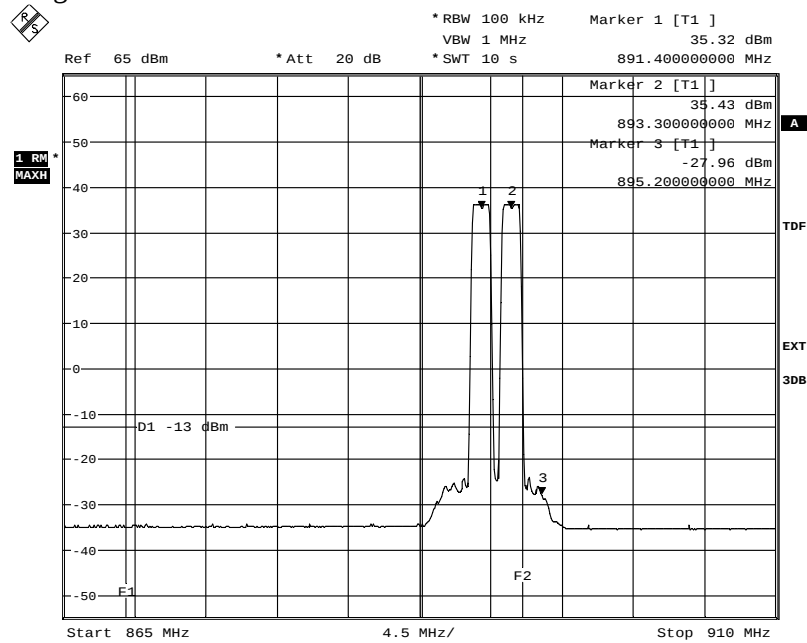

Date: 30.AUG.2013 09:30:51


Appendix 5

Diagram 16 a:

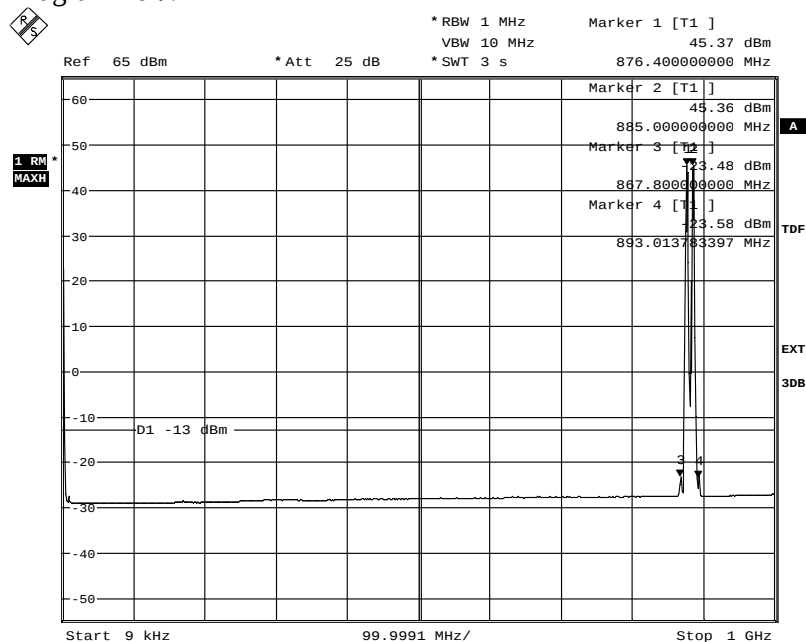

Date: 30.AUG.2013 09:54:40


Diagram 16 b:

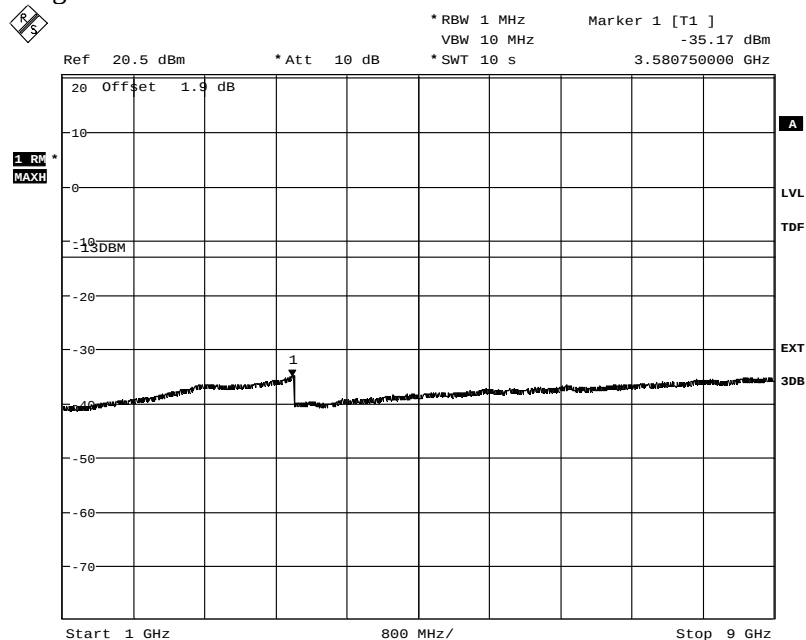

Date: 16.SEP.2013 12:26:15

Appendix 5


Diagram 16 c:

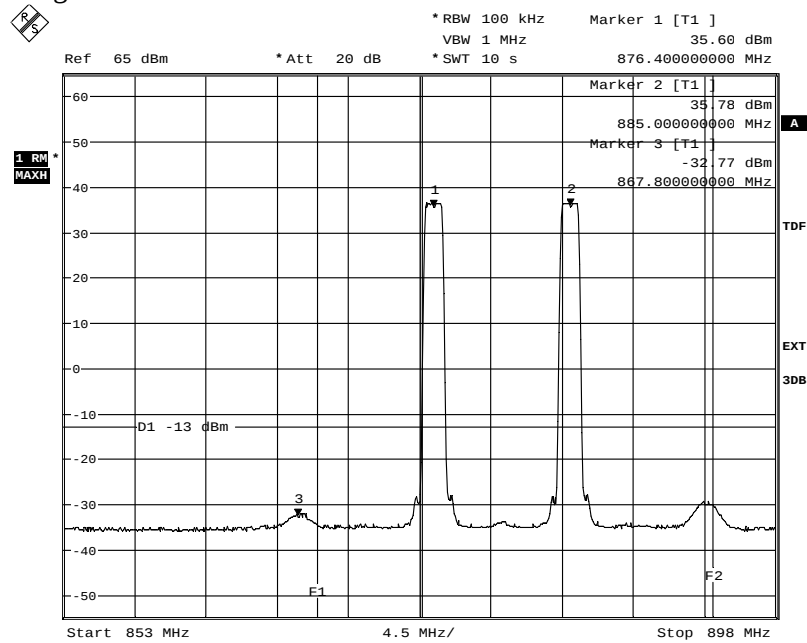

Date: 30.AUG.2013 11:03:03


Appendix 5

Diagram 17 a:

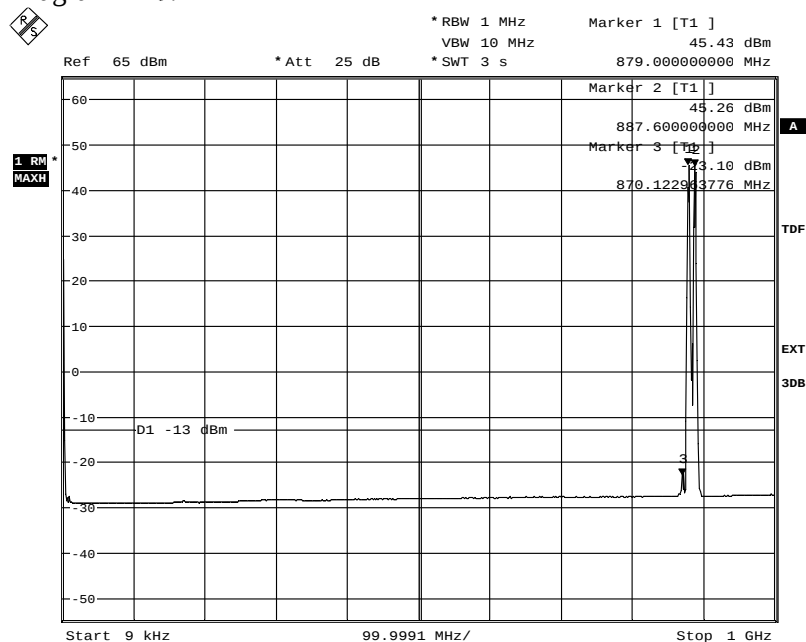

Date: 30.AUG.2013 09:35:25


Diagram 17 b:

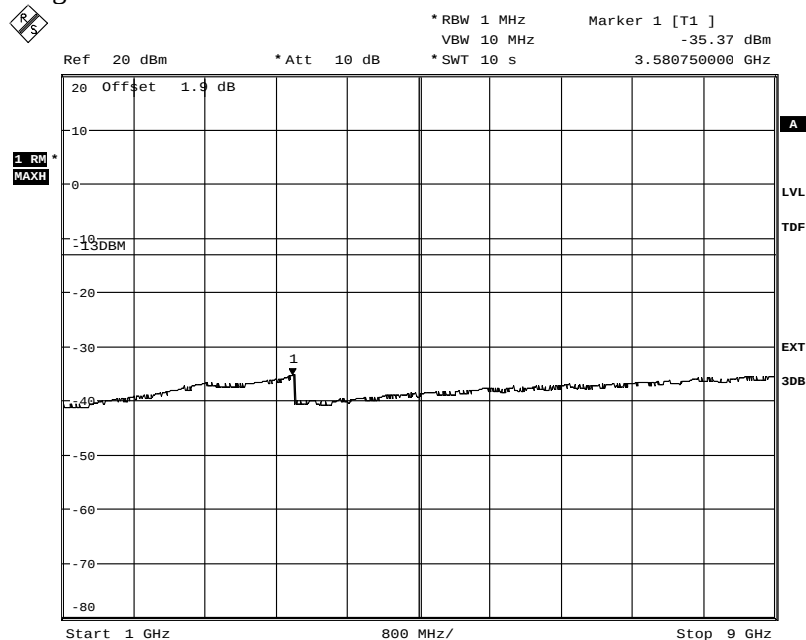

Date: 30.AUG.2013 09:40:05

Appendix 5

Diagram 17 c:

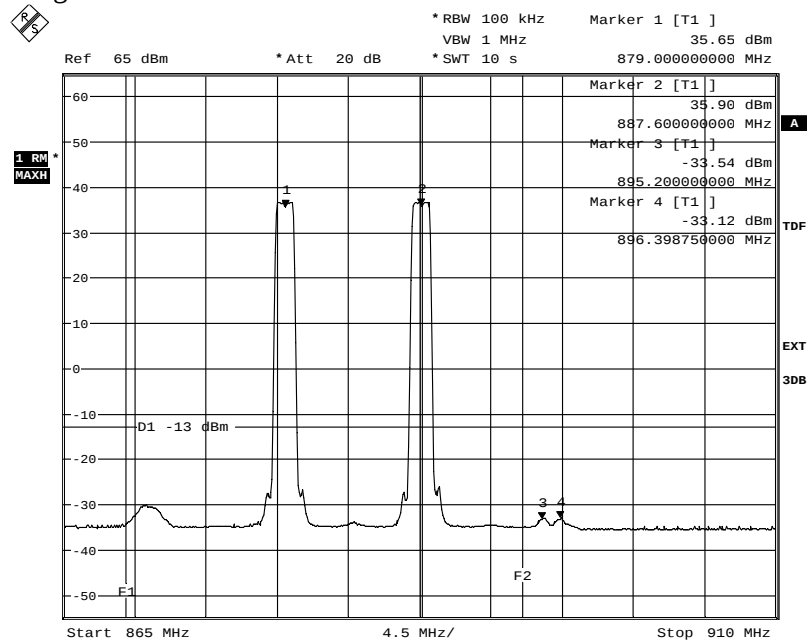

Date: 30.AUG.2013 09:33:21

Appendix 6

Field strength of spurious radiation measurements according to 47 CFR 2.1053 / IC RSS-132 5.5

Date	Temperature	Humidity
2013-08-20	23°C ± 3°C	47 % ± 5 %
2013-08-21	24°C ± 3°C	49 % ± 5 %

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 9 GHz. The upper frequency boundary was chosen to comprise 10x the highest fundamental TX frequency.

In the frequency range 30 MHz - 9 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was


$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. A pre-measurement was first performed with peak detector. The Test object was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were with the substitution method according to the standard.

Appendix 6

Representative test set-up during the spurious radiation measurements is shown in the picture below:

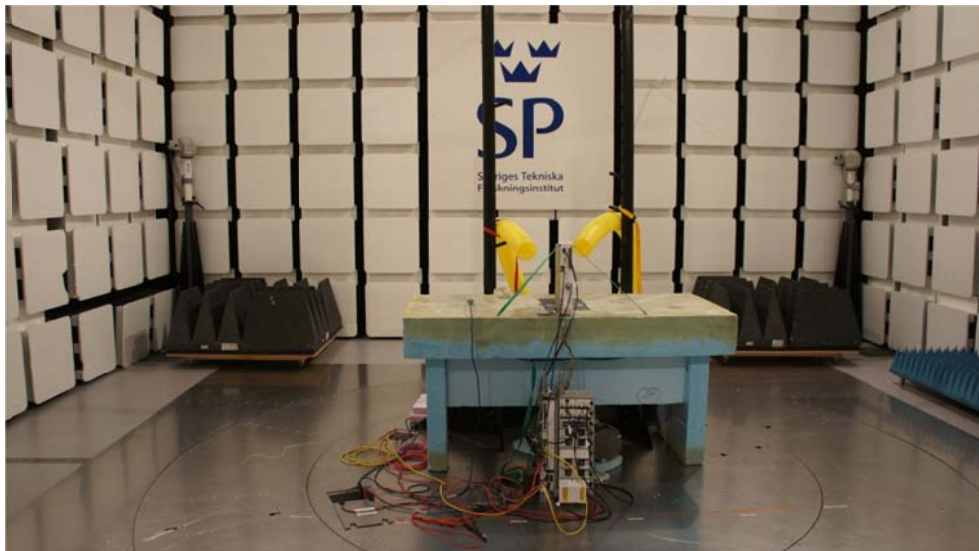

Measurement equipment

Measurement equipment	SP number
Semi anechoic chamber	503 881
R&S ESU 26	901 553
EMC 32 ver. 8.52.0	503 899
Chase Bilog Antenna CBL 6111A	503 182
EMCO Horn Antenna 3115	502 175
µComp Nordic, Low Noise Amplifier	901 545
High pass filter	901 373
Temperature and humidity meter, Testo 625	504 188

Tested configurations

B
M
M2-5
T

Appendix 6

Results, representing worst case

Single carrier, MIMO mode

Diagram	BW configuration	Tested configurations
1 a+b	5 MHz	M

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30 - 9 000	All emissions > 20 dB below limit	All emissions > 20 dB below limit

Measurement uncertainty: 3.2 dB

Remarks

The upper frequency bound for verification was chosen as 9 GHz in order to cover 10 x the maximum fundamental TX frequency.

Limits


CFR 47 § 22.917 and IC RSS-132 5.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per any 100 kHz bandwidth.

Complies?	Yes
-----------	-----


Appendix 6

Diagram 1 a:

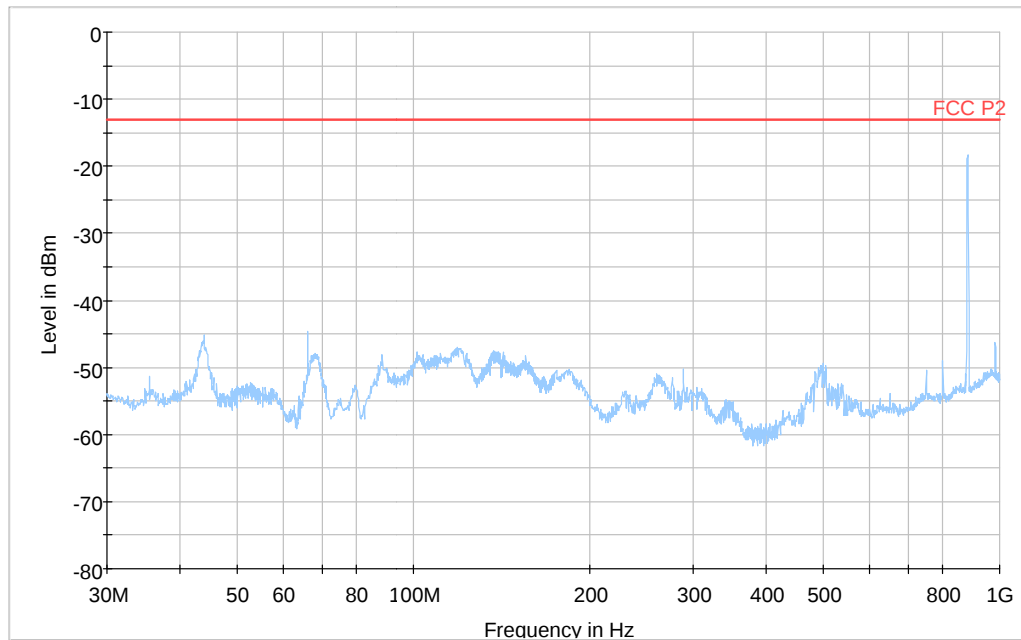

Note: The emission at 881 MHz is the carrier frequency and shall be ignored in this context.

Diagram 1 b:

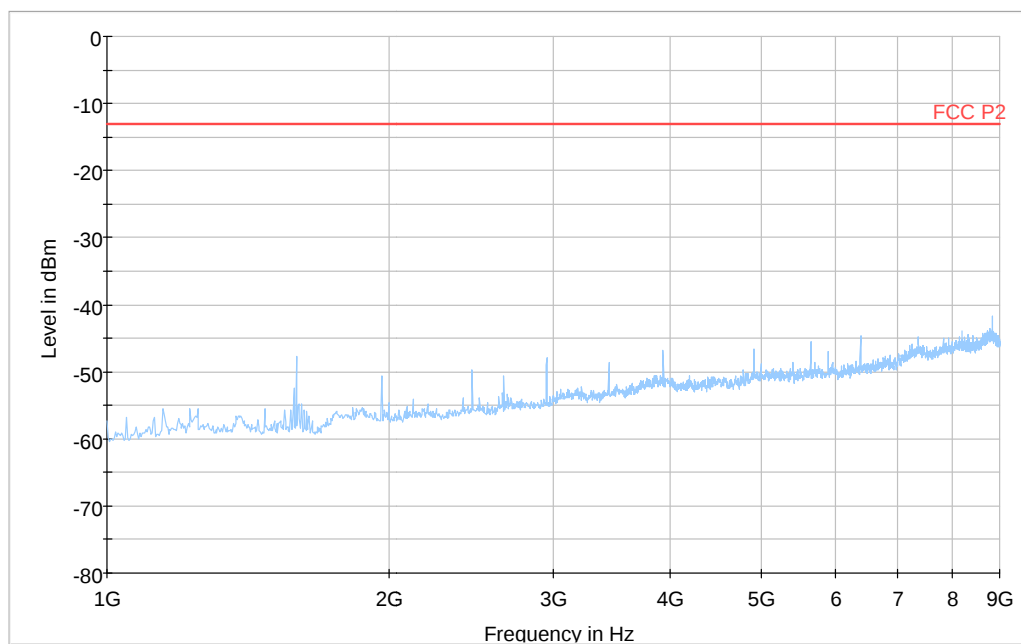

Appendix 7

Frequency stability measurements according to CFR 47 §22.355 , 2.1055 / IC RSS 132 5.3

Date	Temperature (test equipment)	Humidity (test equipment)
2013-09-06	23 °C ± 3 °C	29% ± 5 %
2013-09-07	22 °C ± 3 °C	31% ± 5 %
2013-09-09	23 °C ± 3 °C	38% ± 5 %

Test set-up and procedure

The measurement was made per 3GPP TS 36.141. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
R&S FSQ 40	504 143
RF attenuator	-
Temperature Chamber	503 360
Datascan 7321	502 698
Testo 635, temperature and humidity meter	504 203
Multimeter Fluke 87	502 190

Appendix 7

Results

Nominal Voltage -48 V DC

Maximum output power at mid channel (M, 881.5 MHz)

Channel Bandwidth 5 MHz

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	T (°C)	Test model E-TM1.1
-48.0	+20	-4
-55.2	+20	-3
-40.8	+20	-5
-48.0	+30	-2
-48.0	+40	-1
-48.0	+50	-2
-48.0	+10	-3
-48.0	0	-2
-48.0	-10	-2
-48.0	-20	-2
-48.0	-30	-3
Maximum freq. error (Hz)		5
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Remark

It was deemed sufficient to test one combination of TX frequency, channel bandwidth configuration and test model (modulation), as all combinations share a common internal reference to derive the TX frequency from.

Appendix 7

Limits

Limit according to:

3GPP TS 36.141:

The frequency error shall be within ± 0.05 PPM ± 12 Hz (± 44.075 Hz).

§22.355

The frequency stability shall be within ± 1.5 ppm (± 1322.25 Hz).

RSS-132 5.3 Frequency:

The carrier frequency shall not depart from the reference frequency in excess of ± 1.5 ppm (± 1322.25 Hz) for base stations when tested to the temperature and supply voltage variations specified in RSS-Gen.

Complies?	Yes
-----------	-----

Appendix 8

Receiver spurious emissions measurements according to FCC CFR 47, 15.111 / IC RSS-132 4.6

Date	Temperature	Humidity
2013-09-02	23 °C ± 3 °C	48 % ± 5

Test set-up and procedure

The measurements were performed according to ANSI C63.4 2009.

Measurements were performed at the receiver antenna port RF B, with RF A transmitting a single carrier WCDMA signal at maximum output power into a 50 ohm termination.

In the frequency range 9 kHz – 1 GHz the measurement was first performed with peak detector. Emission on frequencies close to or above the limit is re-measured with quasi-peak detector. In the frequency range 1-12.5 GHz the AVG detector was used.

Measurement equipment	SP number
R&S FSQ 40	504 143
8494B Attenuator	503 249
Testo 635 Temperature and humidity meter	504 203

The receiver emission spectra are shown on the following pages. The configuration is described in appendix 1.

Diagram 1 a-c: 9 kHz- 12.5 GHz

Remark

The highest internal frequency as declared by the client was 2.4576 GHz, thus the choice of the upper frequency boundary was set to $5 \times 2.5 \text{ GHz} = 12.5 \text{ GHz}$.

The emission at 9 kHz on some plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

Where multiple limits apply, the most stringent limit was applied for compliance assessment.

Limit


§15.111 Antenna power conduction limits for receivers

The power at the antenna terminal at any frequency within the range of measurements specified in §15.33 shall not exceed 2.0 nanowatts (-57 dBm).

Compliant	Yes
-----------	-----


Appendix 8

Diagram 1 a:

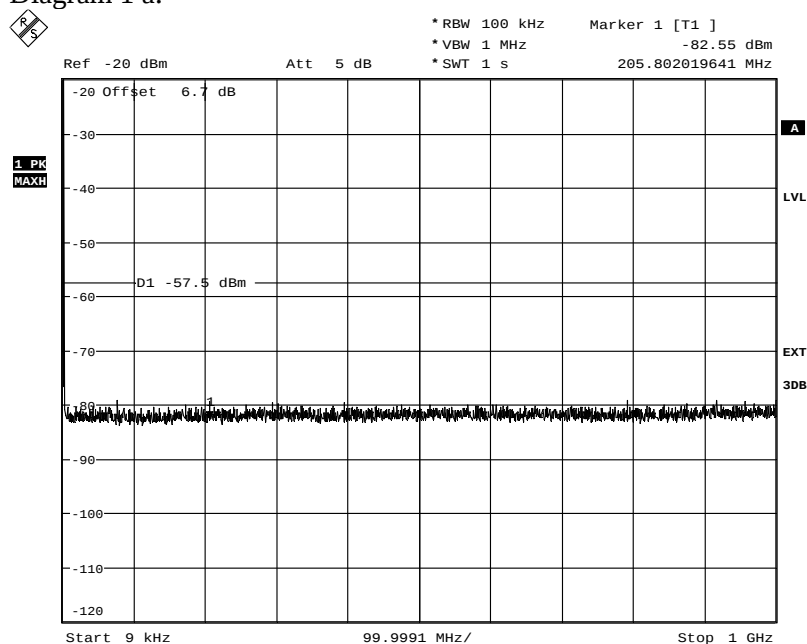

Date: 2.SEP.2013 10:20:18


Diagram 1 b:

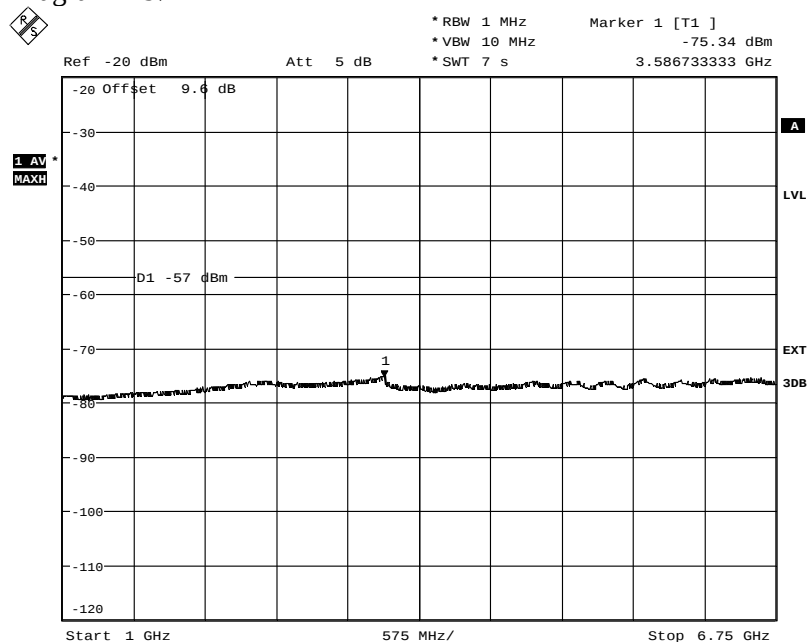

Date: 2.SEP.2013 10:23:03

Appendix 8

Diagram 1 c:

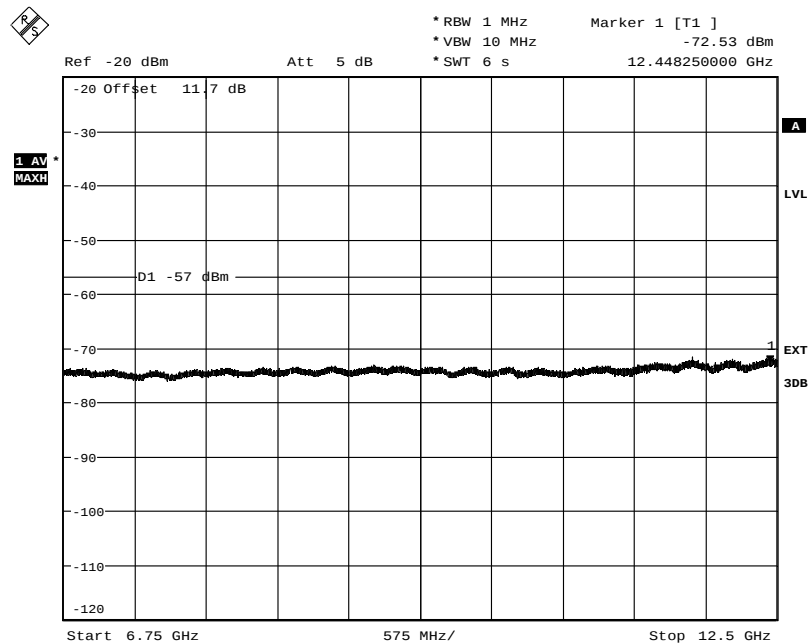

Date: 2.SEP.2013 10:24:46

Appendix 9

External photos

Front side:




Back side:



Product Label:



Left side:

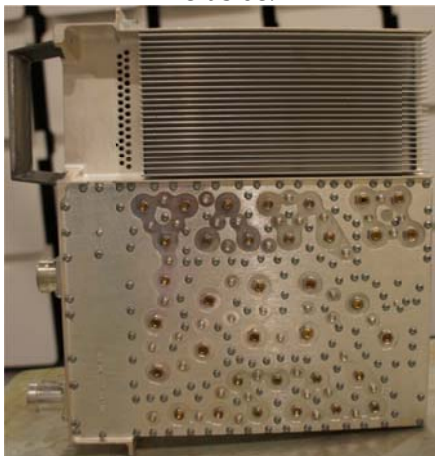

Right side:



Appendix 9

Top side:



Bottom side:

