

Contact person RISE

Tomas Lennhager
Electronics
+46 10 516 54 09
tomas.lennhager@ri.se

Date

2017-10-23

Reference

7P06127-G

Page

1 (64)

Ericsson AB
Anders Karlsson
BURA DURA RP QRM
Torshamnsgatan 21
164 80 Stockholm**Radio measurements on Radio 4415 B2 B25 equipment
with FCC ID TA8AKRC161636 and IC: 287AB-AS161636**

Product name: Radio 4415 B2 B25

Product number: KRC 161 636/1

**RISE Research Institutes of Sweden AB
Electronics - EMC**

Performed by

Tomas Lennhager

Examined by

Monika Fuller

RISE Research Institutes of Sweden AB

Postal address

Box 857
SE-501 15 BORÅS
Sweden

Office location

Brinellgatan 4

SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00

+46 33 13 55 02

info@ri.se

This report may not be reproduced other than in full, except
with the prior written approval of the issuing laboratory.

Summary	4
Description of the test object	5
Purpose of test.....	6
Operation modes during measurements	6
Conducted measurements	6
Radiated measurements.....	6
References.....	6
Measurement equipment.....	7
Uncertainties	7
Reservation	7
Delivery of test object.....	7
Manufacturer's representative.....	7
Test engineers	7
Test participant(-s)	7
Test frequencies used for radiated and conducted measurements.....	8
Test setup: conducted measurements	9
Test setup: radiated measurements.....	10
RF power output measurements according to CFR 47 §24.232 / IC RSS-133 6.4, conducted	12
Test set-up and procedure	12
Results.....	12
Remark	14
Limits	14
Occupied bandwidth measurements according to CFR47 2.1049 / RSS-Gen 4.6.1	15
Test set-up and procedure	15
Results.....	15
Band edge measurements according to CFR 47 §24.238 / IC RSS-133 6.6	20
Test set-up and procedure	20
Results.....	20
Limits	21
Conducted spurious emission measurements according to CFR 47 §24.238 / IC RSS-133 6.2	38
Test set-up and procedure	38
Results.....	38
Remark	39
Limits	39
Field strength of spurious radiation measurements according to CFR 47 §24.238 / IC RSS-133 6.5.....	54
Measurement equipment.....	56
Results.....	56

Limits	56
Frequency stability measurements according to CFR 47 § 24.235 / IC RSS 133 6.3	59
Test set-up and procedure	59
Results	60
Remark	61
Limits	61
Photos of test object	62

Summary

Standard Listed part of	Compliant
FCC CFR 47 part 24/ RSS 133, RSS-Gen	
2.1046/ 6.4 RF power output, conducted	Yes
2.1049/ 4.6.1 Occupied bandwidth	Yes
2.1051/ 6.6 Band edge	Yes
2.1051/ 6.2 Spurious emission at antenna terminals	Yes
2.1053/ 6.5 Field strength of spurious radiation	Yes
2.1055/ 6.3 Frequency stability	Yes

Description of the test object

Equipment:	Radio equipment Radio 4415 B2 B25 Product number KRC 161 636/1 FCC ID: TA8AKRC161636 IC: 287AB-AS161636
HVIN:	AS161636
Hardware revision state:	R1B
Tested configuration:	Single RAT GSM
Frequency range:	TX: 1930 – 1990 MHz RX: 1850 – 1910 MHz
IBW:	20 MHz
Output power:	Max 40 W/ antenna port Single carrier: 1x 43 dBm (1x 20W) Multi carrier: 2x 43 dBm (2x 20W) 4x 40 dBm (4x 10W)
Antenna ports:	4 TX / 4 RX ports
Antenna:	No dedicated antenna, handled during licensing
RF configurations:	Single and multi-carrier, 1-4 carriers/ port
Modulations:	GMSK, 8PSK and AQPSK
RF power Tolerance:	+0.6/ -2.5 dB
CPRI Speed	Up to 10.1 Gbit/s
Nominal supply voltage:	-48VDC

The information above is supplied by the manufacturer.

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47 part 24, Industry Canada RSS-133 and RSS-Gen.

Operation modes during measurements

Measurements were performed with the test object transmitting following modulations: GMSK, AQPSK, 8-PSK.

Unless otherwise stated, all measurements were performed with the test object transmitting pseudorandom data in all timeslots and settings for maximum transmitter output power applicable for each configuration.

All measurements were performed with the test object configured for maximum transmit power if not otherwise noted. At ARFCN 512 and 810 maximum power was reduced by 8 dbm to 38.0 dbm.

The measured configurations covers worst case settings.

Conducted measurements

The test object was supplied with -48 VDC by an external power supply. Additional connections are documented in the setup drawings for conducted measurements.

Radiated measurements

The test object was powered with -48 VDC by an external power supply. Additional connections are documented in the setup drawings for radiated measurements.

References

Measurements were done according to relevant parts of the following standards:

ANSI C63.4-2014

CFR 47 part 2, April 2017

CFR 47 part 24, April 2017

ANSI C63.26-2015

KDB 971168 D03 IM Emission Repeater Amp v01

3GPP TS 37.141, version 13.5.0

RSS-Gen Issue 4

RSS-133 Issue 6

Measurement equipment

	Calibration Due	RISE number
Test site Tesla	2019-12	503 881
R&S ESU 40	2018-07	901 385
R&S FSQ 40	2018-07	504 143
R&S FSW 43	2018-08	902 073
Control computer with R&S software EMC32 version 10.20.01	-	BX62351
High pass filter 3-26.5 GHz	2017-12	BX40074
High pass filter 3-26.5 GHz	2018-06	901 502
RF attenuator Weinschel WA73-20-11	2018-05	900 691
Coaxial cable Sucoflex 102EA	2018-05	BX50191
Coaxial cable Sucoflex 102EA	2018-05	BX50236
ETS Lindgren BiConiLog Antenna 3142E	2019-03	BX61914
EMCO Horn Antenna 3115	2019-12	502 175
μComp Nordic, Low Noise Amplifier	2017-12	901 545
Temperature and humidity meter, Testo 635	2018-06	504 203
Temperature and humidity meter, Testo 625	2018-06	504 188

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered: 2017-09-07.

Manufacturer's representative

Mikael Jansson, Ericsson AB.

Test engineers

Tomas Isbring for radiated tests, RISE
 Tomas Lennhager and Andreas Johnson for conducted tests, RISE.

Test participant(-s)

None.


Test frequencies used for radiated and conducted measurements

TX test frequencies, conducted measurements:

ARFCN Downlink	Frequency [MHz]	Symbolic name	Comment
512	1930.2	B	Single carrier TX bottom frequency
513	1930.4	B+1	Lowest carrier frequency supporting full nominal power.
513	1930.4	B2	2 carrier TX bottom constellation
516	1931.0		
513	1930.4	B4	4 carrier TX bottom constellation
516	1931.0		
519	1931.6		
522	1932.2		
661	1960.0	M	Single carrier TX mid frequency
660	1959.8	M2	2 carrier TX mid constellation
663	1960.4		
657	1959.2	M4	4 carrier TX mid constellation
660	1959.8		
663	1960.4		
666	1961.0		
809	1989.6	T-1	Highest carrier frequency supporting full nominal power.
810	1989.8	T	Single carrier TX bottom frequency
806	1989.0	T2	2 carrier TX top constellation
809	1989.6		
800	1987.8	T4	4 carrier TX top constellation
803	1988.4		
806	1989.0		
809	1989.6		
513	1930.4	$B_{im\ 3}$	3 carrier TX bottom configuration according to KDB 971168 D03
516	1931.0		
611	1950.0		
711	1970.0	$T_{im\ 3}$	3 carrier TX top configuration according to KDB 971168 D03
806	1989.0		
809	1989.6		

All RX frequencies were configured 80 MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

Test setup: conducted measurements

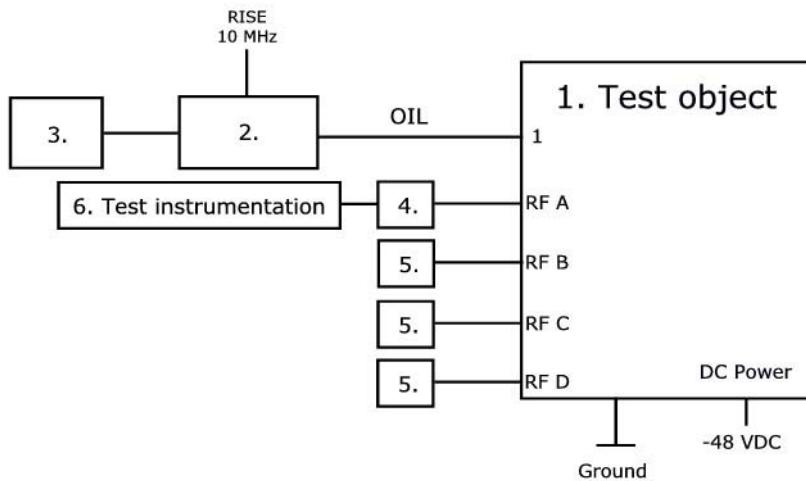

Test object:

1.	Radio 4415 B2 B25, KRC 161 636/1, rev. R1B, s/n: D16W963153 With Radio Software: CXP 901 7316/7, rev. R67HA. FCC ID: TA8AKRC161636 and IC: 287AB-AS161636
----	---


Associated equipment:

2.	Testing Equipment: CT10, LPC 102 467/1, rev. R1C, s/n: T01F375047, BAMS – 1001466801 with software CXA 104 446/1, rev. R8AA
----	---

Functional test equipment:

3.	Computer, HP EliteBook 8560w, BAMS - 1001236851
4.	RF Attenuator: RISE number: 900 691
5.	Terminator, 50 ohm
6.	RISE Test Instrumentation according to measurement equipment list for each test. The signal analyzer was connected to the RISE 10 MHz reference standard during all measurements.

Test setup: radiated measurements

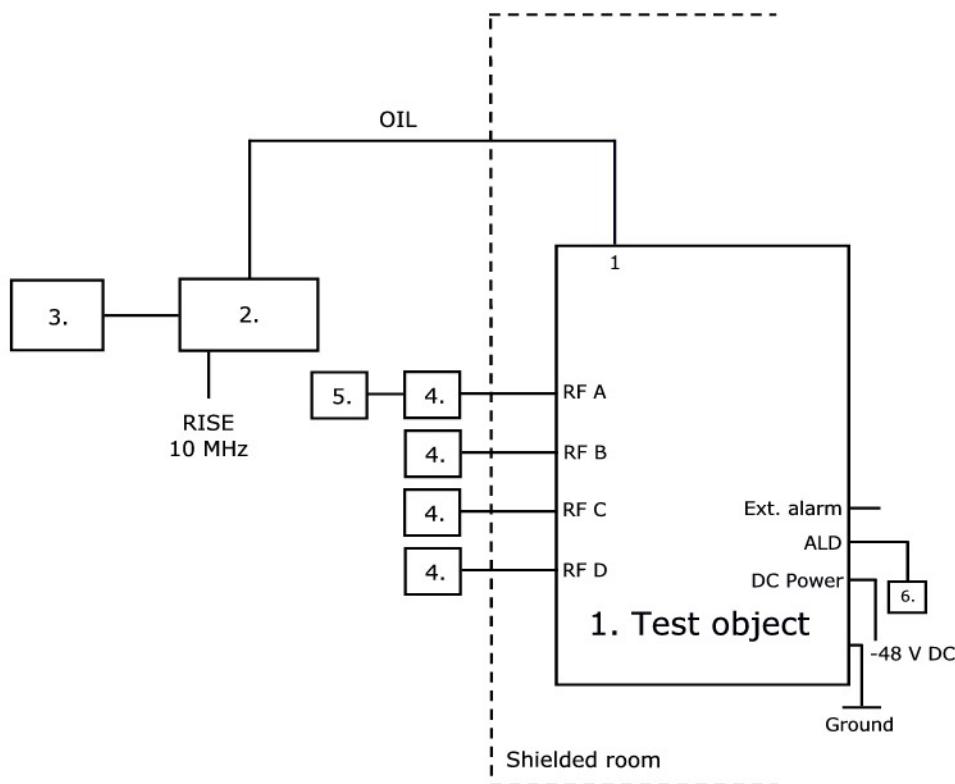

1.	Radio 4415 B2 B25, KRC 161 636/1, rev. R1B, s/n: D16W963156 With Radio Software: CXP 901 7316/7, rev. R67HA. FCC ID: TA8AKRC161636 and IC: 287AB-AS161636
----	---

Associated equipment:

2.	Testing Equipment: CT10, LPC 102 467/1, rev. R1C, s/n: T01F375046, BAMS – 1001466800 with software CXA 104 446/1, rev. R8AA
----	---

Functional test equipment:

3.	Computer, HP EliteBook 8560w, BAMS - 1001236854
4.	Attenuator
5.	R&S ESIB 26, RISE no: 503 292, for supervision purpose only
6.	ALD Control, Andrew, model: ATM200-A20, s/n: DESA101412073

Interfaces:

Power input configuration DC: -48 VDC	Power
RF A, 4.3-10 connector, combined TX/RX	Antenna
RF B, 4.3-10 connector, combined TX/RX	Antenna
RF C, 4.3-10 connector, combined TX/RX	Antenna
RF D, 4.3-10 connector, combined TX/RX	Antenna
1, Optical Interface Link, single mode opto fibre	Signal
2, Optical Interface Link, not used in this configuration	Signal
EXT Alarm, shielded multi-wire	Signal
ALD, shielded multi-wire	Signal
Ground wire	Ground

RF power output measurements according to CFR 47 §24.232 / IC RSS-133 6.4, conducted

Date	Temperature	Humidity
2017-10-03	22 °C ± 3 °C	47% ± 5 %
2017-10-04	23 °C ± 3 °C	38% ± 5 %
2017-10-05	22 °C ± 3 °C	30% ± 5 %

Test set-up and procedure

The test object was connected to a signal analyser measuring peak and RMS output power in CDF mode. A resolution bandwidth of 80 MHz was used.

Measurement equipment	RISE number
R&S FSW 43	902 073
RF attenuator	900 691
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB

Results

Single carrier

Rated output power level at each RF port 1x 43 dBm/ port.

Tested modulation and Symbolic name	Output power CCDF [RMS dBm/ PAR dB]				
	Port RF A	Port RF B	Port RF C	Port RF D	
GMSK, B+1	42.81/ 0.38	42.98/ 0.30	42.98/ 0.30	42.76/ 0.34	
GMSK, M	42.74/ 0.38	42.80/ 0.32	42.79/ 0.32	42.84/ 0.38	
GMSK, T-1	42.71/ 0.38	42.80/ 0.38	42.74/ 0.34	42.71/ 0.38	
8PSK, B+1	42.65/ 3.46	42.82/ 3.46	42.84/ 3.44	42.67/ 3.46	
AQPSK, B+1	42.79/ 3.64	42.97/ 3.60	43.02/ 3.62	42.79/ 3.62	
AQPSK, M	42.76/ 3.62	42.89/ 3.60	42.78/ 3.60	42.80/ 3.60	
AQPSK, T-1	42.77/ 3.60	42.81/ 3.64	42.74/ 3.62	42.69/ 3.62	
GMSK, B+1	42.81/ 0.38	42.98/ 0.30	42.98/ 0.30	42.76/ 0.34	
GMSK, M	42.74/ 0.38	42.80/ 0.32	42.79/ 0.32	42.84/ 0.38	
GMSK, T-1	42.71/ 0.38	42.80/ 0.38	42.74/ 0.34	42.71/ 0.38	

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Reduced output power apply for the channel 512 and 810: 38 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]
Tested modulation and Symbolic name	Port RF C
GMSK, B	38.06/ 0.40
GMSK, T	37.82/ 0.38

Multi carrier

Rated output power 2x 43 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]
Tested modulation and Symbolic name	Port RF C
AQPSK, B2	45.09/ 6.44
AQPSK, M2	45.59/ 6.44
AQPSK, T2	45.58/ 6.42

Multi carrier

Rated output power 4x 40 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]
Tested modulation and Symbolic name	Port RF C
AQPSK, B4	43.85/ 7.36
8PSK, B4	43.52/ 7.24
GMSK, B4	45.09/ 6.08
AQPSK, M4	44.39/ 7.34
8PSK, M4	44.00/ 7.28
GMSK, M4	45.58/ 6.08
AQPSK, T4	44.31/ 7.34
8PSK, T4	44.07/ 7.24
GMSK, T4	45.53/ 6.08

Power Spectrum Density

Single carrier

Rated output power level at RF connector 1x 43 dBm/ port.

	Output power per 1 MHz [RMS dBm]
Tested modulation and Symbolic name	Port RF C
AQPSK, B+1	43.04

Remark

ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/IC Bureau(s). Licensee's are required to take into account maximum antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.

Limits

CFR 47 §24.232

The maximum output power may not exceed 3280 W/MHz (EIRP).
 The Peak to Average Ratio (PAR) may not exceed 13 dB.

RSS-133

Base station transmitters operating in the band 1930-1990 MHz shall not have output power exceeding 100 watts. When the transmitter power is measured in terms of average value, the peak-to-average ratio(PAR) of the power shall not exceed 13 dB

There is no EIRP limit specified for base station equipment in the RSS-133.

EIRP compliance is addressed at the time of licensing, as required by the responsible IC Bureau. Licensee's are required to take into account the antenna gain to get the maximum usable power settings to prevent the radiated output power to exceed the EIRP limits specified in SRSP-510

Complies?	Yes
-----------	-----

Occupied bandwidth measurements according to CFR47 2.1049 / RSS-Gen 4.6.1

Date 2017-10-05	Temperature 22 °C ± 3 °C	Humidity 30% ± 5 %
--------------------	-----------------------------	-----------------------

Test set-up and procedure

The measurements were made per definition in § 2.1049. The output was connected to a signal analyzer with the Peak detector activated in max hold.

Measurement equipment	RISE number
R&S FSW 43	902 073
RF attenuator	900 691
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Single carrier

Diagram	Modulation	Symbolic name	Tested Port	Occupied BW (99%) [kHz]
1	8PSK	B+1	RF C	245
2	8PSK	M	RF A	245
3	8PSK	M	RF B	245
4	GMSK	M	RF C	245
5	8PSK	M	RF C	245
6	AQPSK	M	RF C	241
7	8PSK	M	RF D	245
8	8PSK	T-1	RF C	245

The diagrams are shown on the following pages.

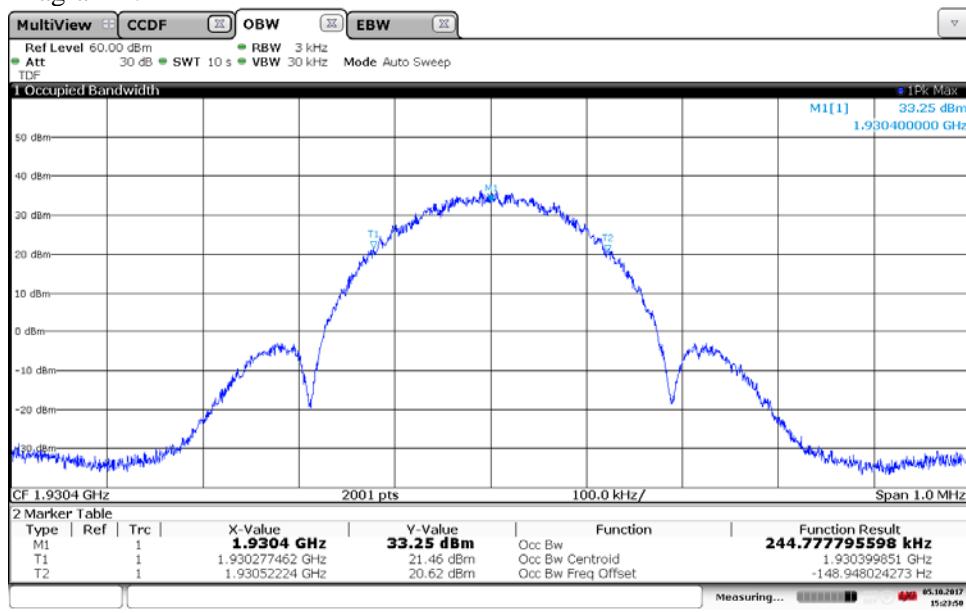
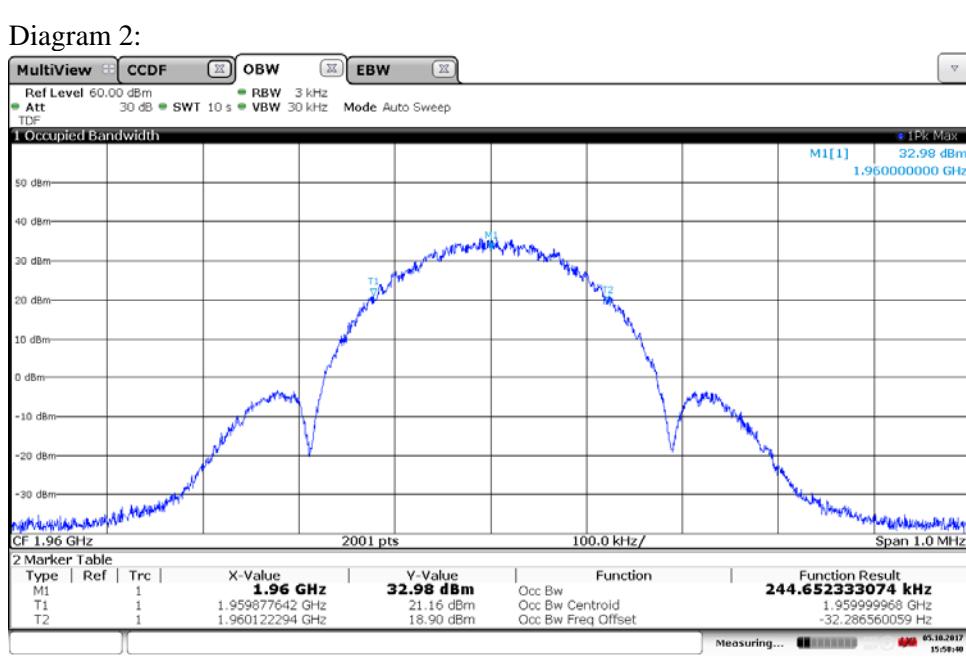
Diagram 1:

Diagram 2:


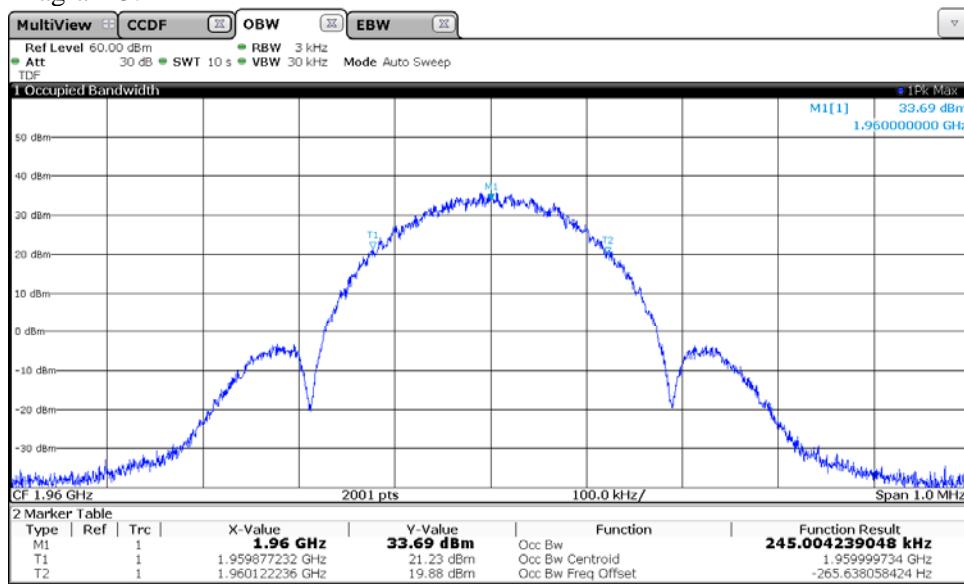
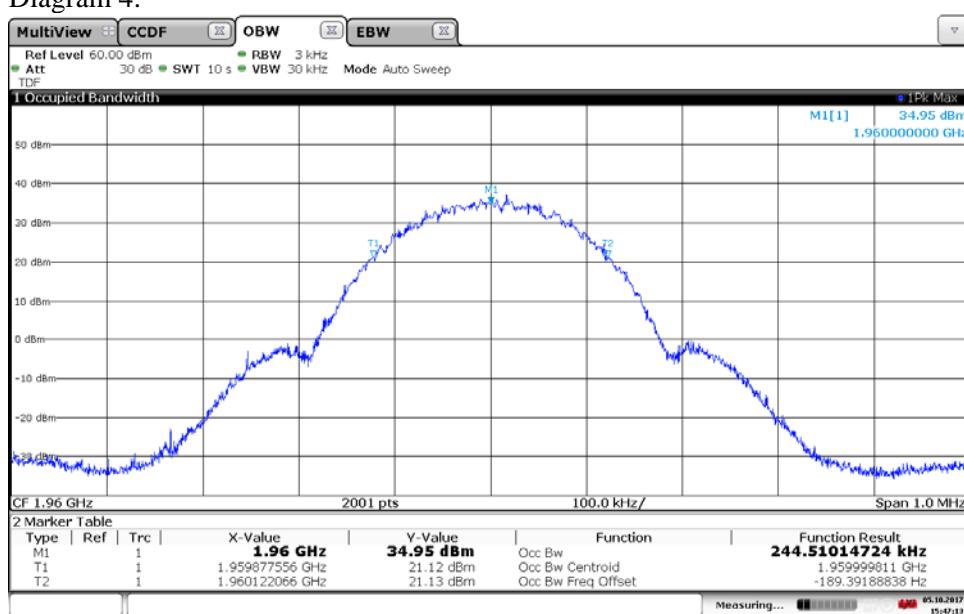
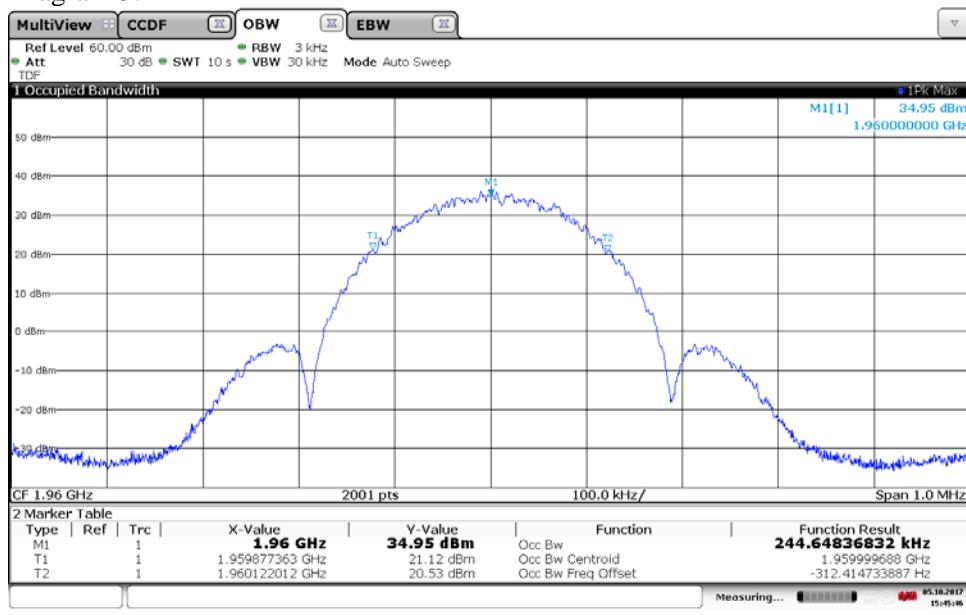
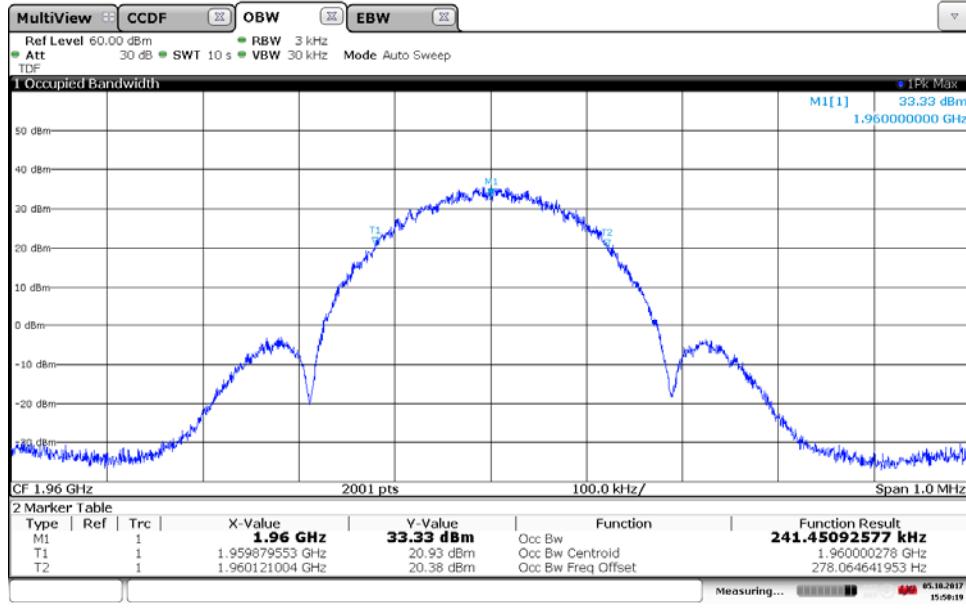
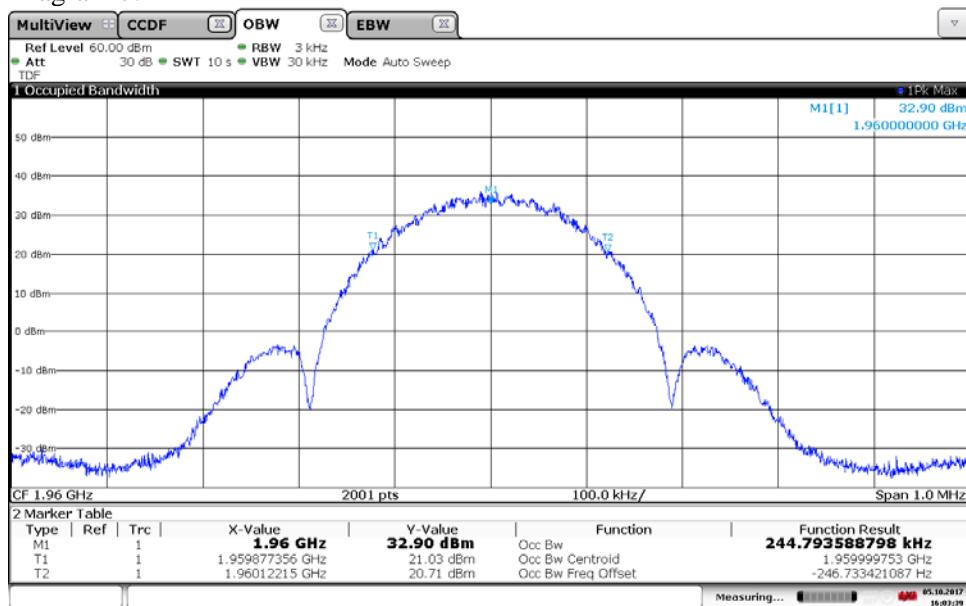
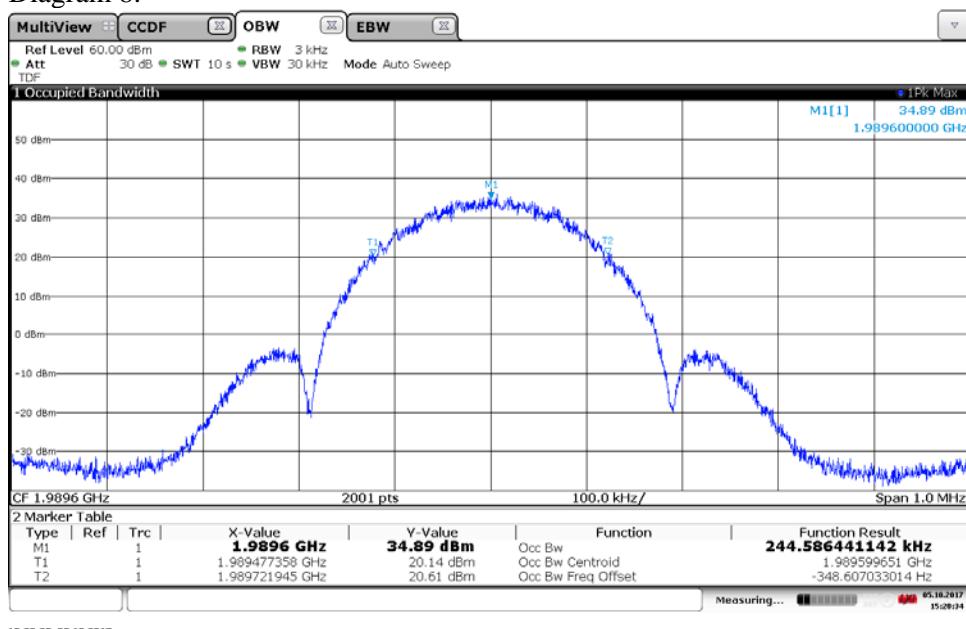
Diagram 3:

Diagram 4:


Diagram 5:


15:45:47 05.10.2017

Diagram 6:


15:50:19 05.10.2017

Diagram 7:

Diagram 8:


Band edge measurements according to CFR 47 §24.238 / IC RSS-133 6.6

Date 2017-10-06 2017-10-10	Temperature 22 °C ± 3 °C 22 °C ± 3 °C	Humidity 21% ± 5 % 22% ± 5 %
----------------------------------	---	------------------------------------

Test set-up and procedure

The measurements were made per definition in §24.238. The output was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. A RBW of 3 kHz (>1% of EBW) was used up to 1 MHz away from the band edges.

From 1 MHz to 30 MHz away from the band edges a RBW of 100 kHz was used. To compensate for the reduced RBW the limit was adjusted by 10 dB to -23 dBm in this frequency range.

Measurement equipment	RISE number
R&S FSW 43	902 073
RF attenuator	900 691
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Singel carrier

Diagram	Modulation	Symbolic name	Tested Port
1 a-b	GMSK	B+1	RF C
2 a-b	8PSK	B+1	RF C
3 a-b	AQPSK	B+1	RF C
4 a-b	GMSK	T-1	RF C
5 a-b	8PSK	T-1	RF C
6 a-b	AQPSK	T-1	RF C
7 a-b	GMSK	B	RF A
8 a-b	GMSK	T	RF A
9 a-b	GMSK	B	RF B
10 a-b	GMSK	T	RF B
11 a-b	GMSK	B	RF C
12 a-b	GMSK	T	RF C
13 a-b	GMSK	B	RF D
14 a-b	GMSK	T	RF D

Multi carrier

Diagram	Modulation	Symbolic name	Tested Port
15 a-b	GMSK	Bim	RF C
16 a-b	GMSK	Tim	RF C


The diagrams are shown on the following pages.

Limits


CFR 47 §24.238 and RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.


Complies?	Yes
-----------	-----

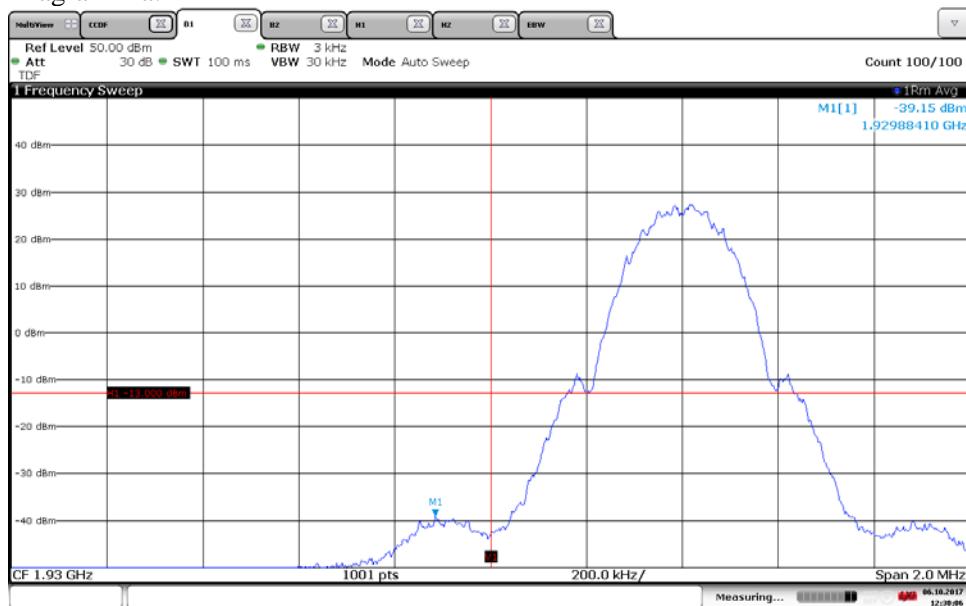Diagram 1 a:


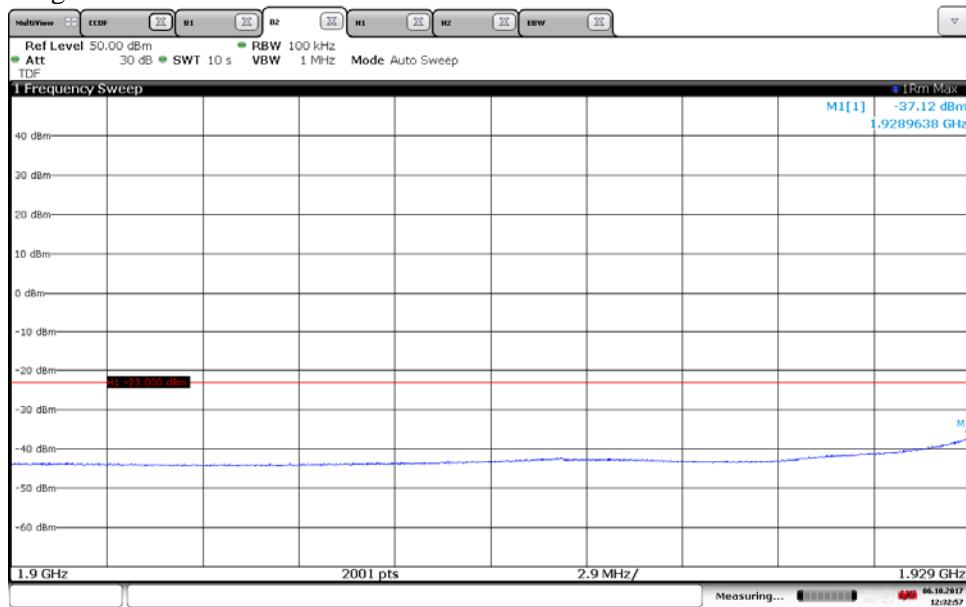
12:30:06 06.10.2017

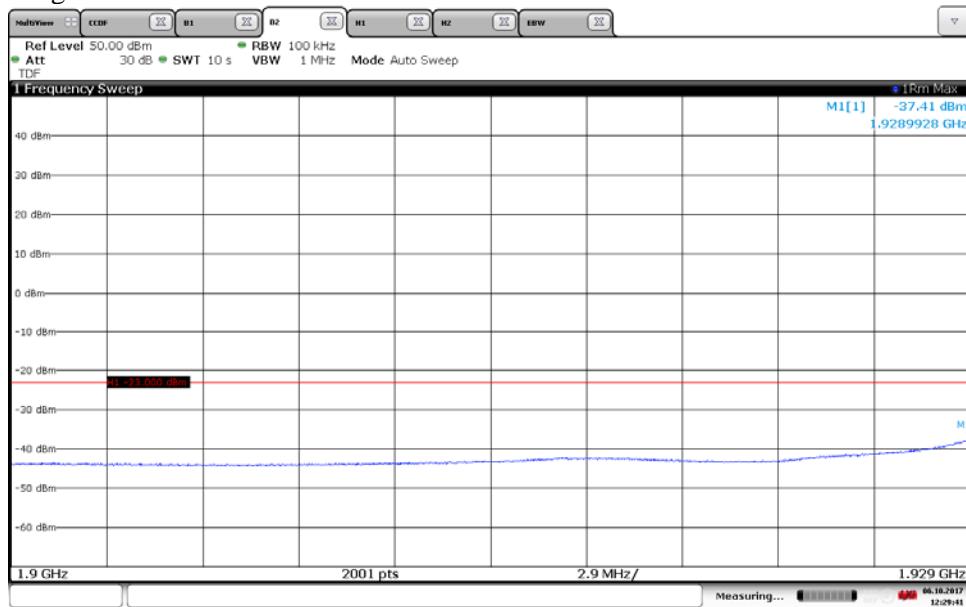Diagram 1 b:


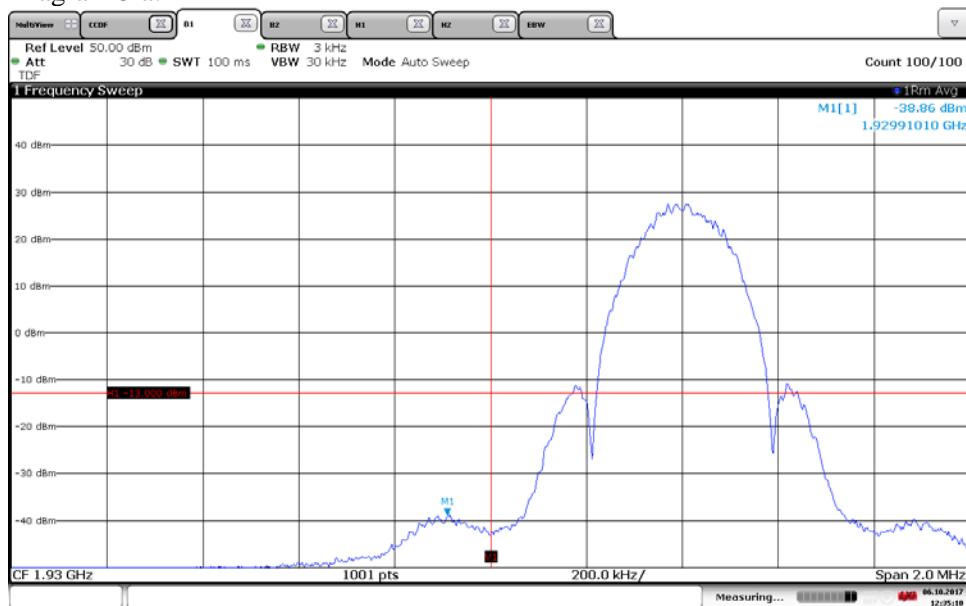
12:29:42 06.10.2017

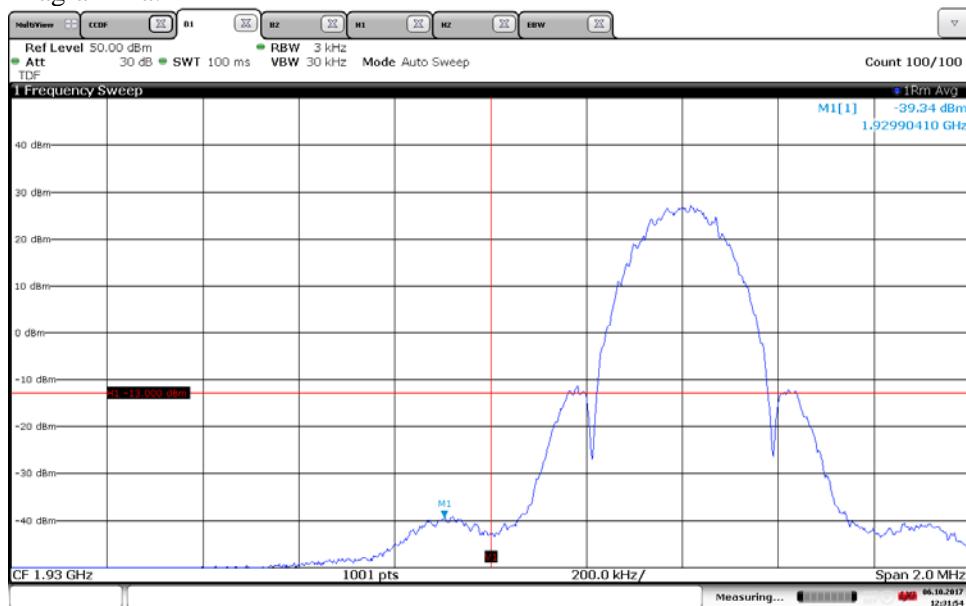Diagram 2 a:


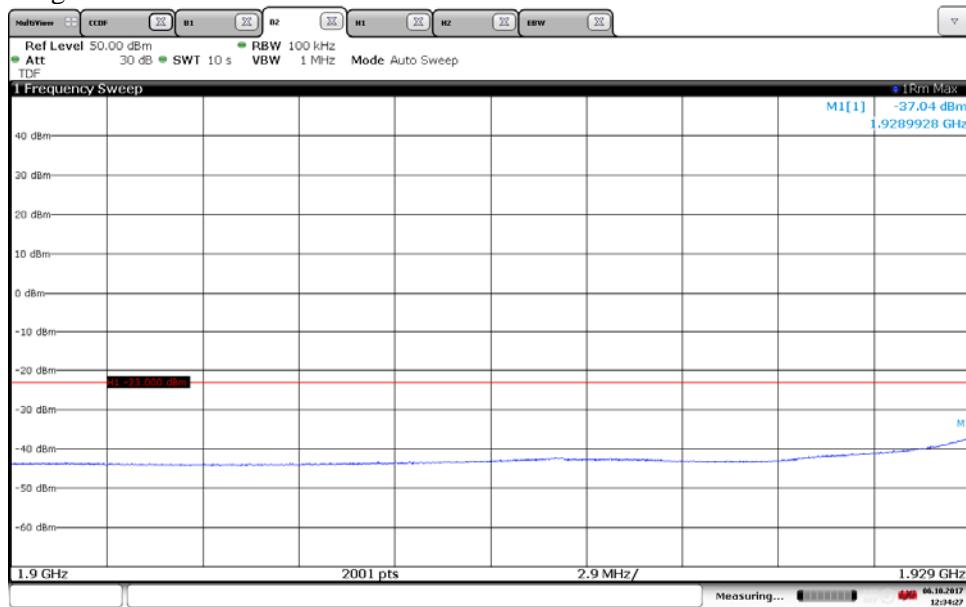
12:31:55 06.10.2017

Diagram 2 b:


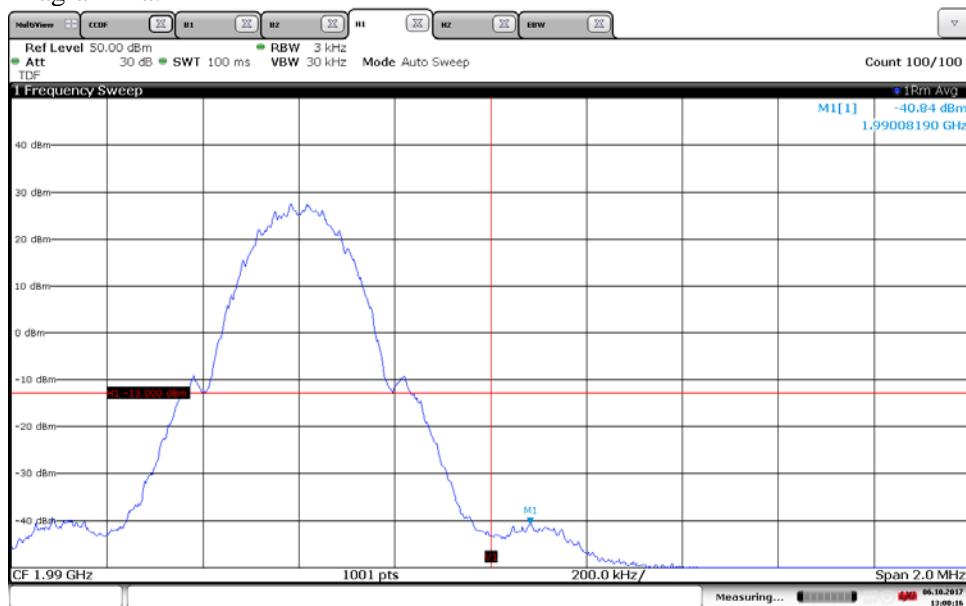
12:32:57 06.10.2017

Diagram 3 a:


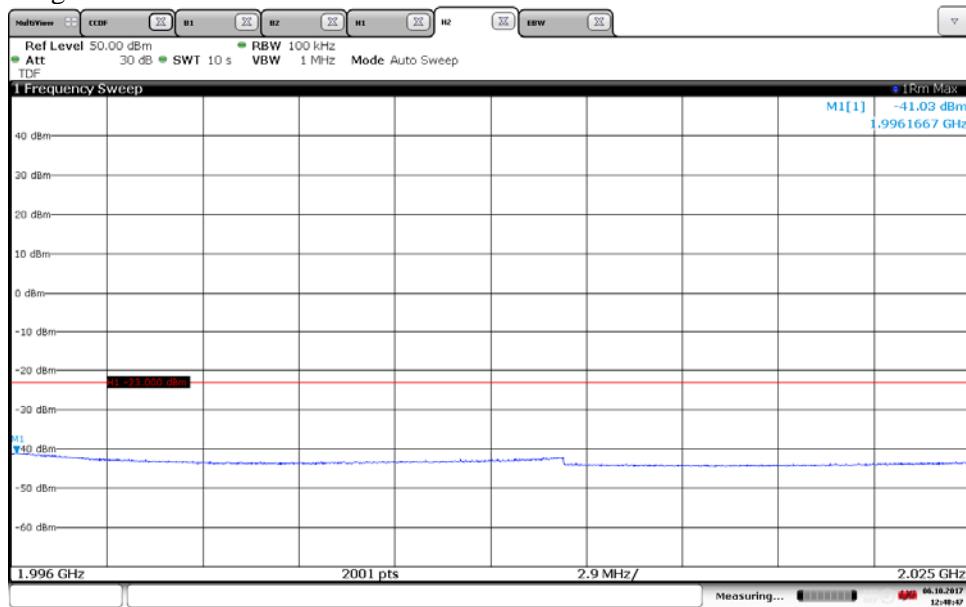
12:35:10 06.10.2017

Diagram 3 b:


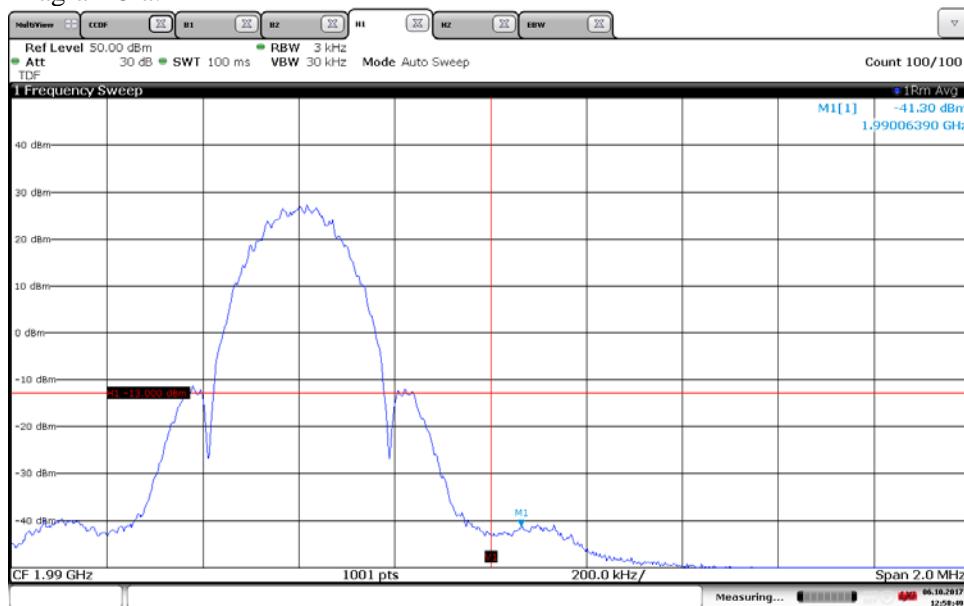
12:34:28 06.10.2017

Diagram 4 a:


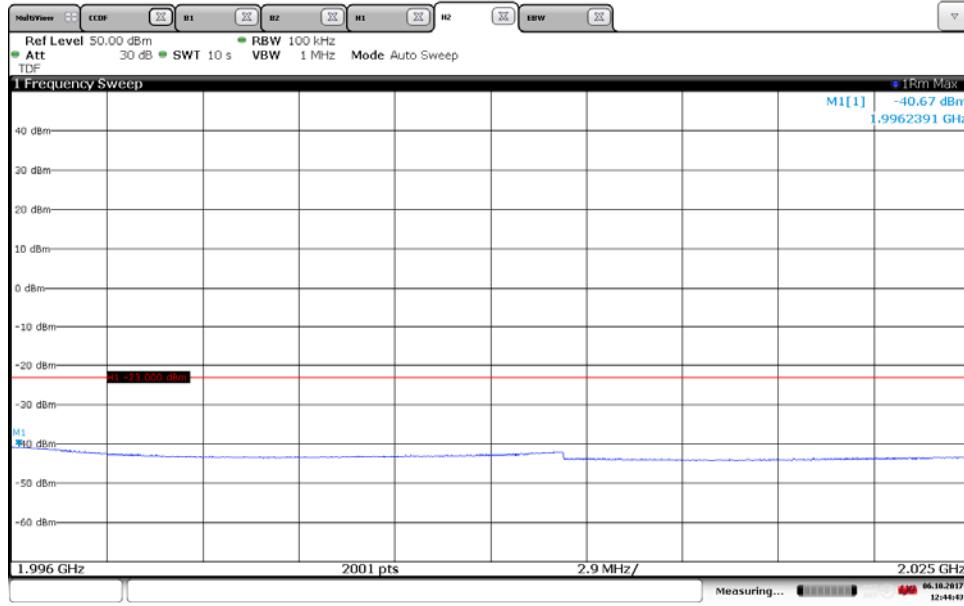
13:00:16 06.10.2017

Diagram 4 b:


12:40:48 06.10.2017

Diagram 5 a:


12:50:49 06.10.2017

Diagram 5 b:


12:44:44 06.10.2017

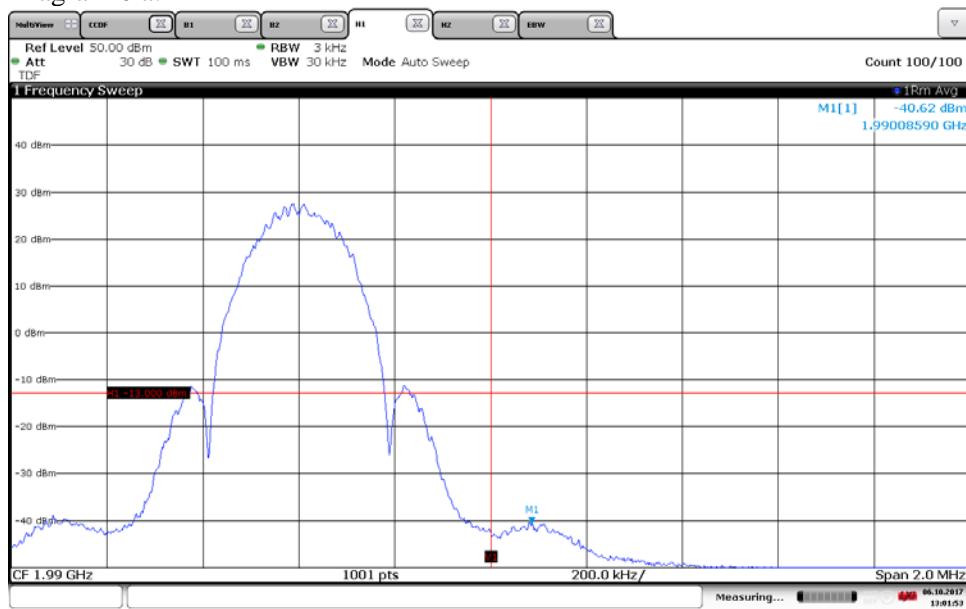
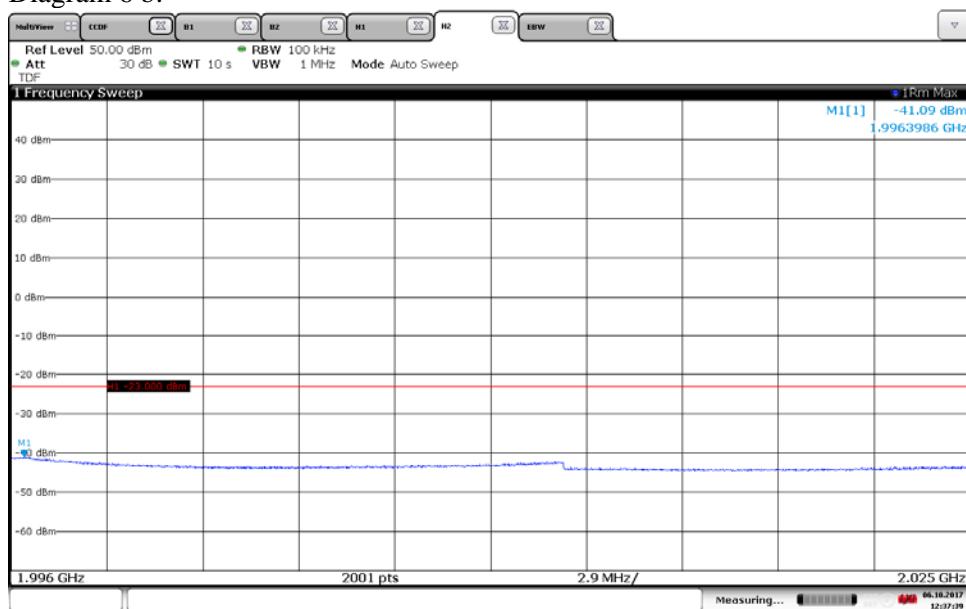
Diagram 6 a:

Diagram 6 b:


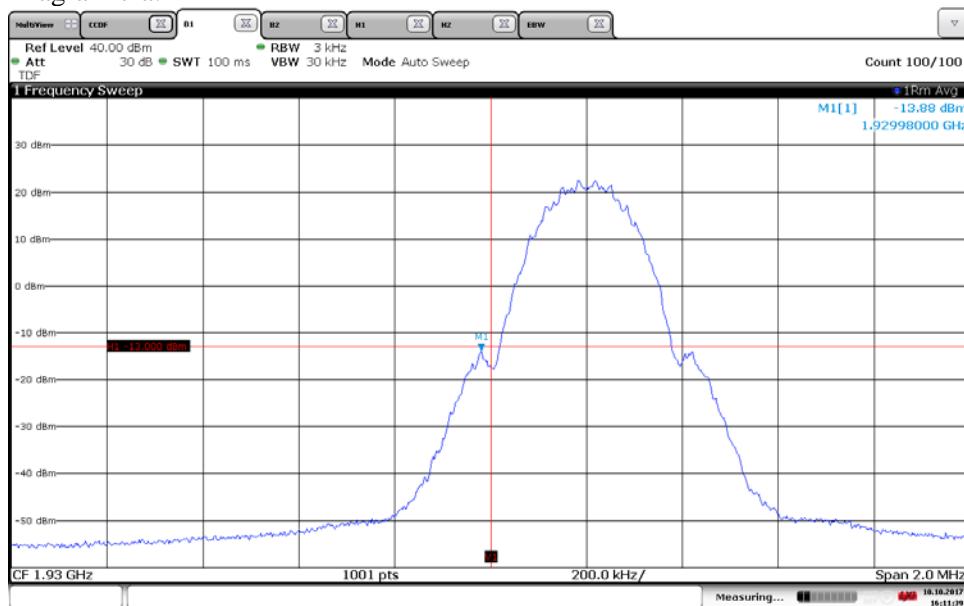
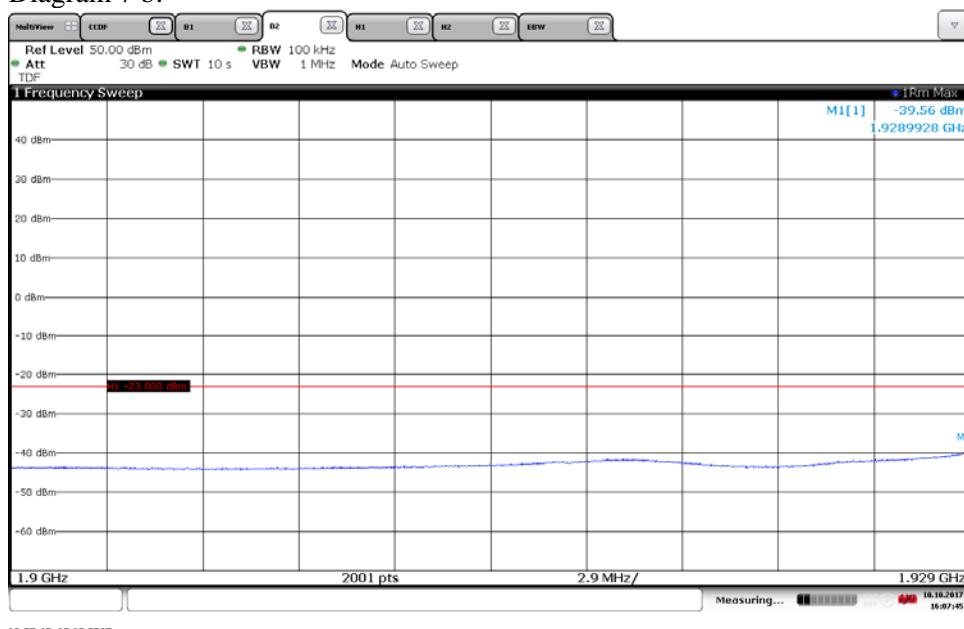
Diagram 7 a:

Diagram 7 b:


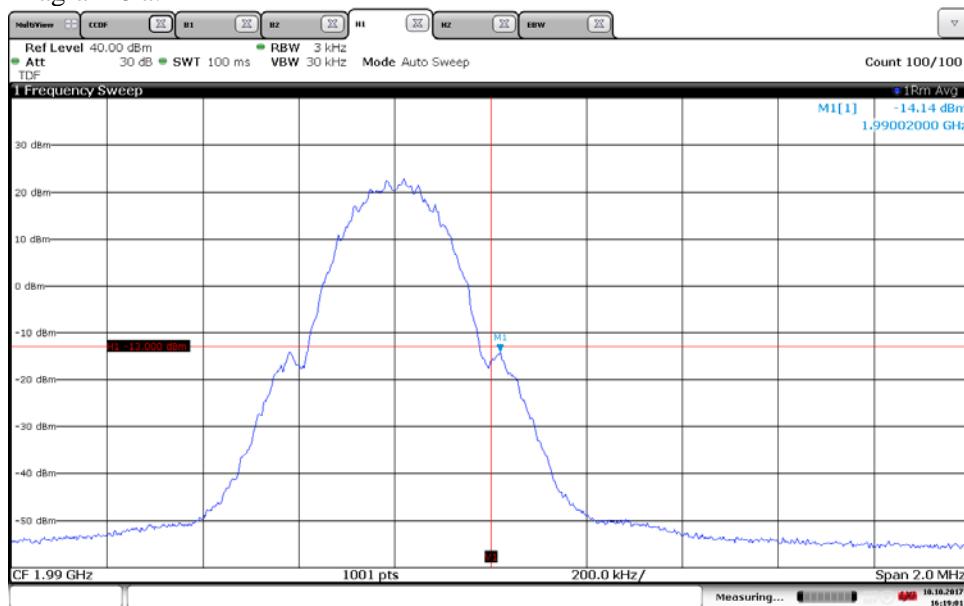
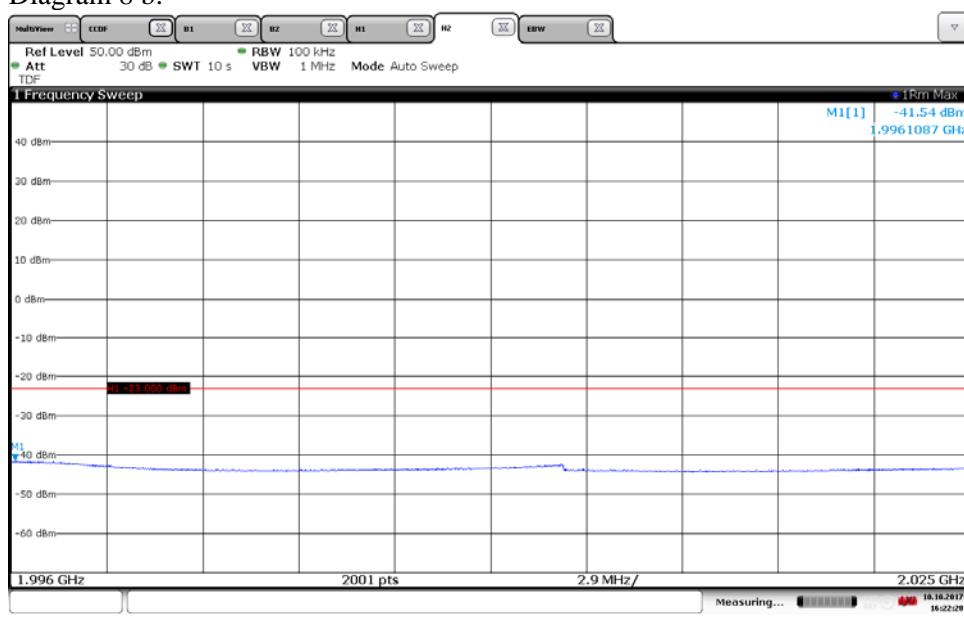
Diagram 8 a:

Diagram 8 b:


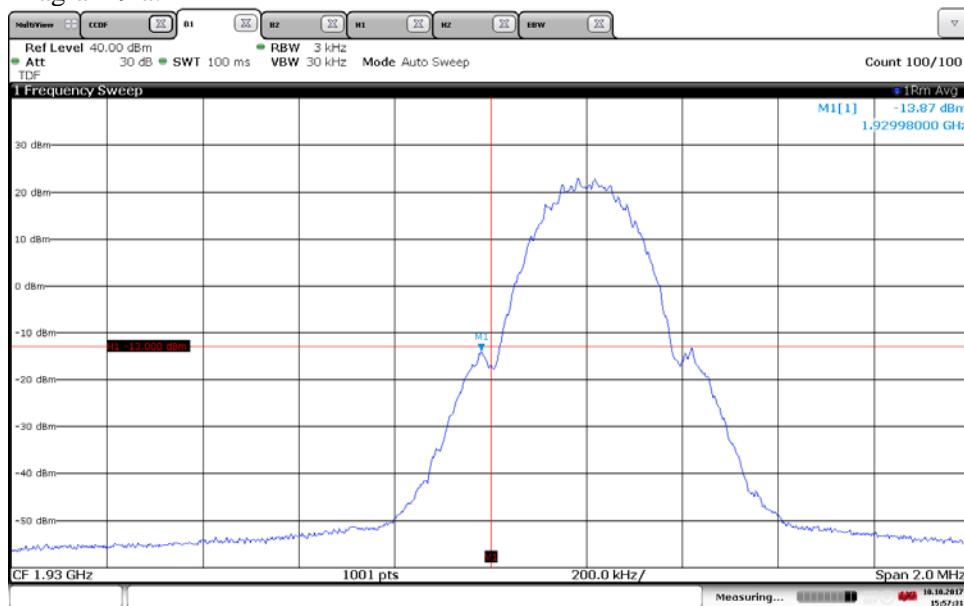
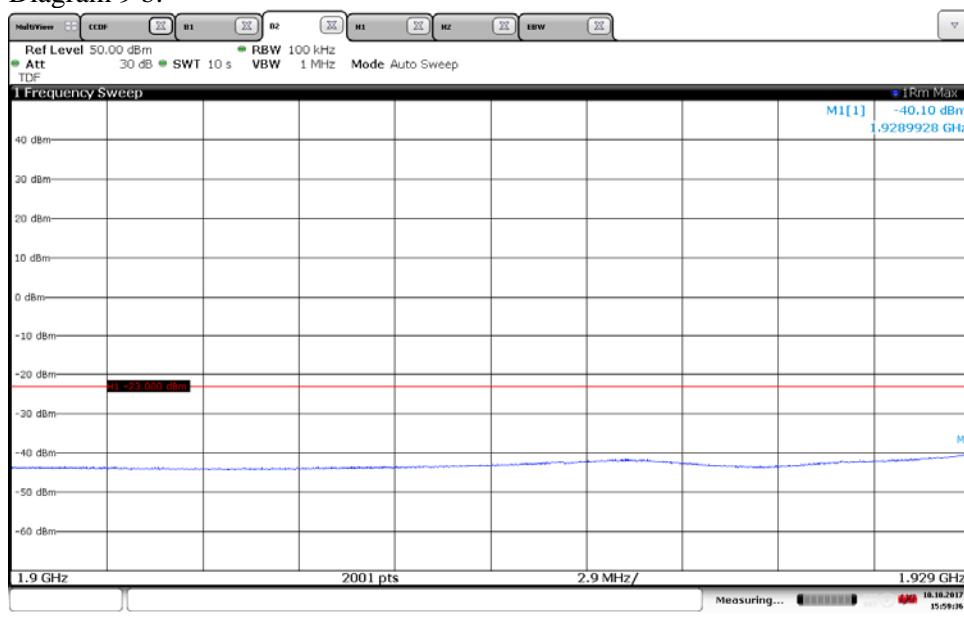
Diagram 9 a:

Diagram 9 b:


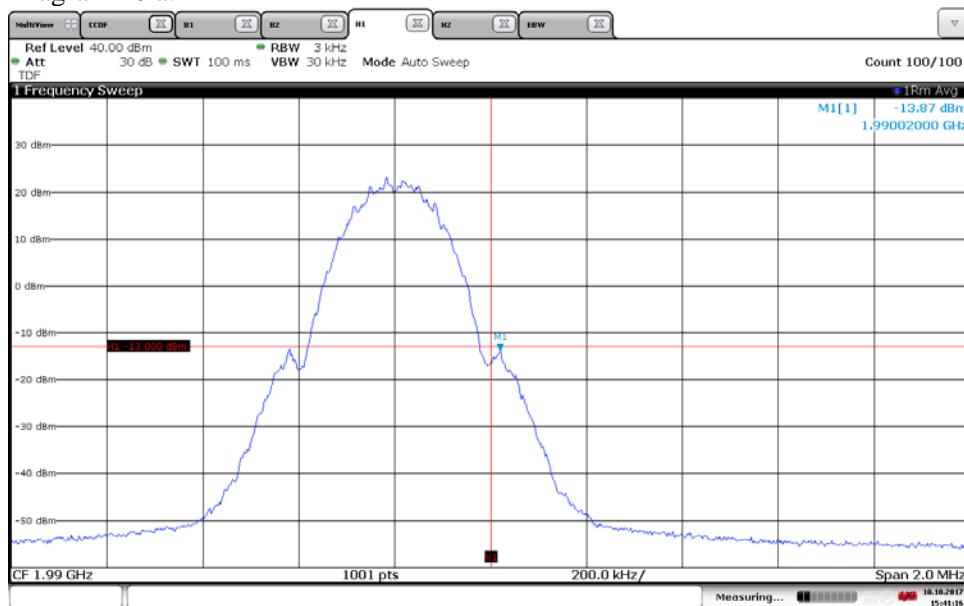
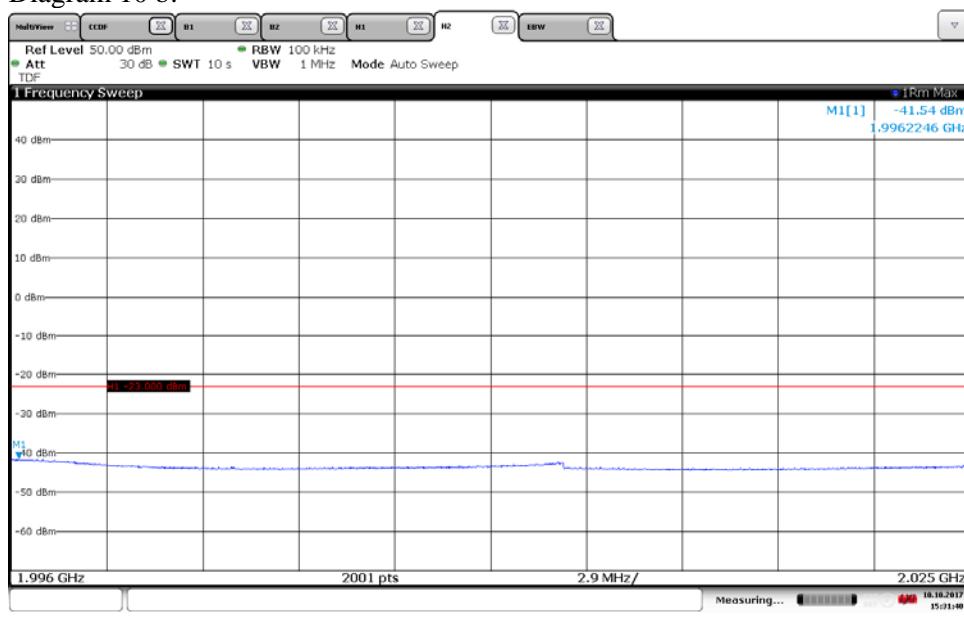
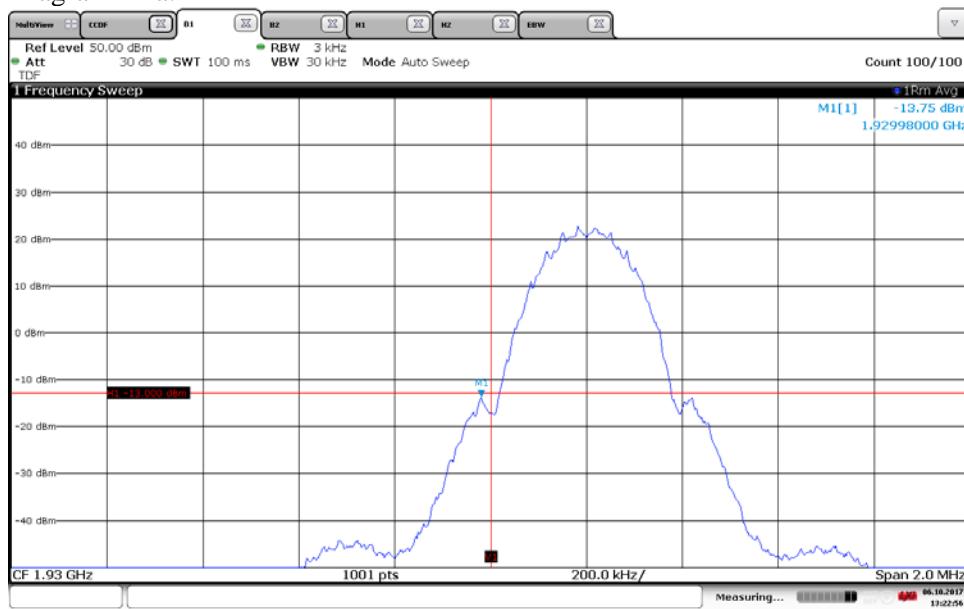
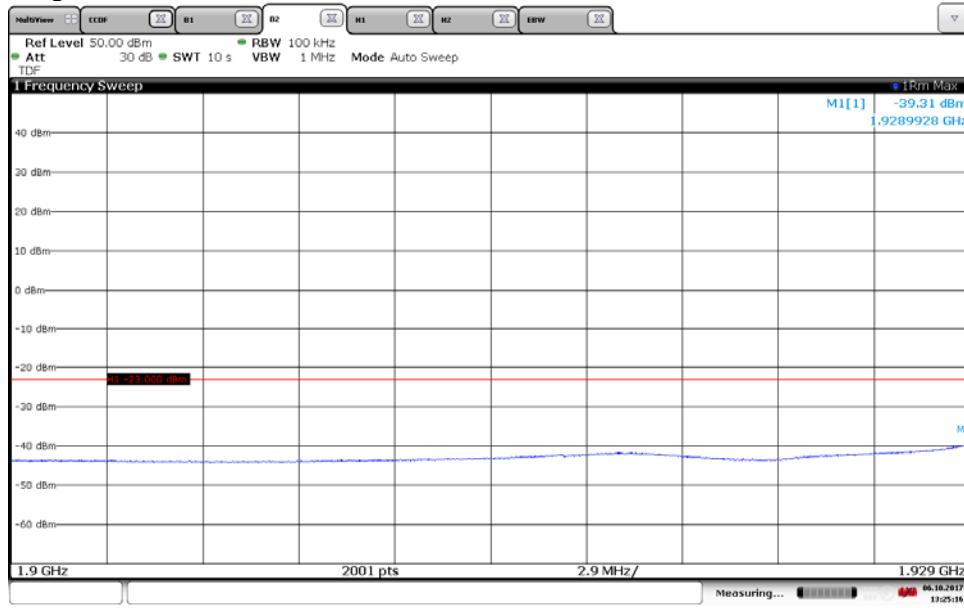
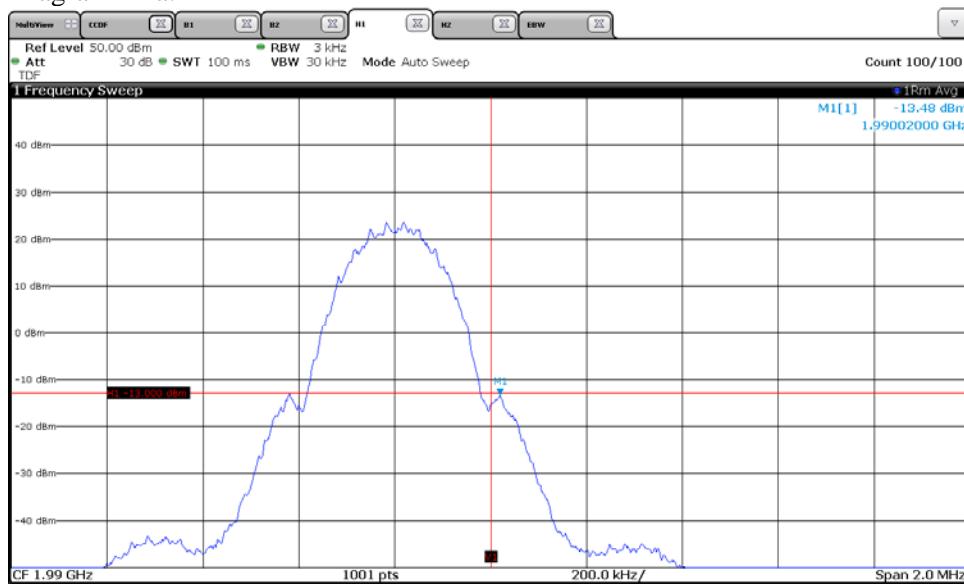
Diagram 10 a:

Diagram 10 b:


Diagram 11 a:


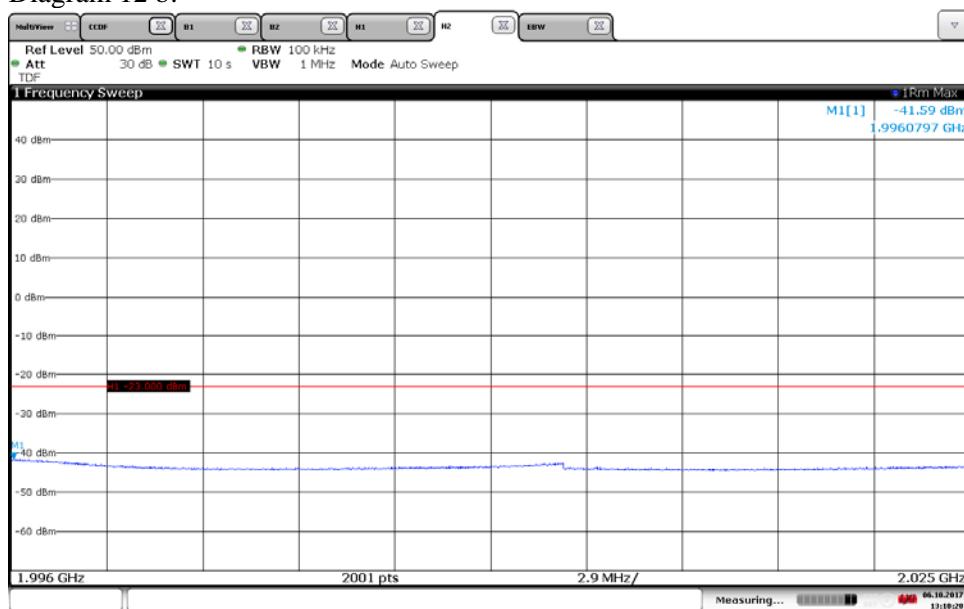
13:22:56 06.10.2017

Diagram 11 b:


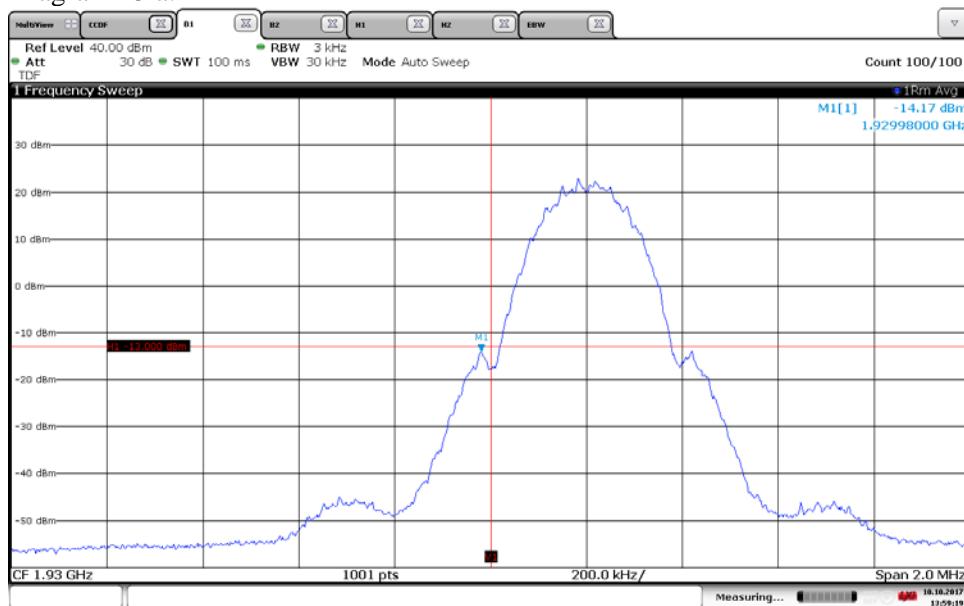
13:25:17 06.10.2017

Diagram 12 a:


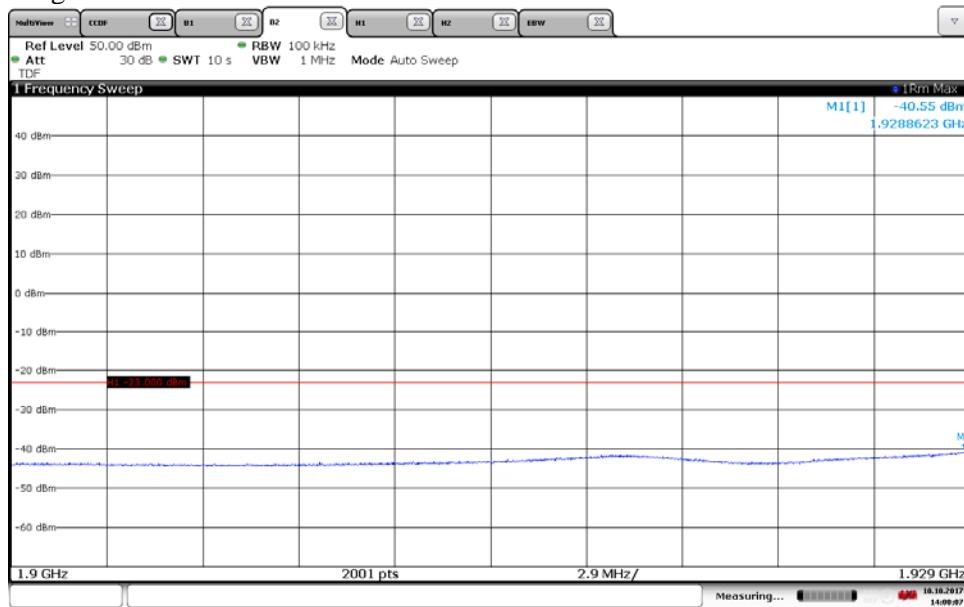
13:09:28 06.10.2017

Diagram 12 b:


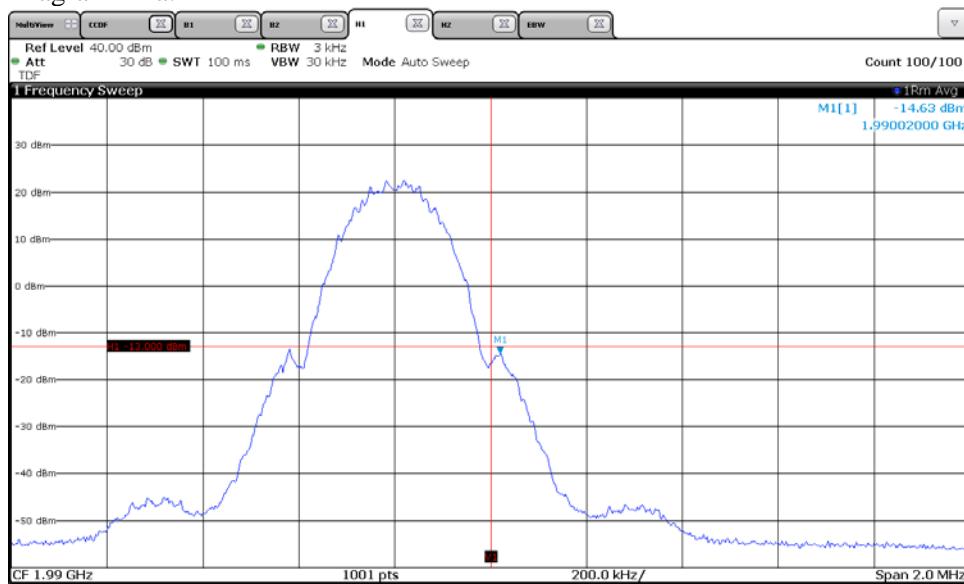
13:10:29 06.10.2017

Diagram 13 a:


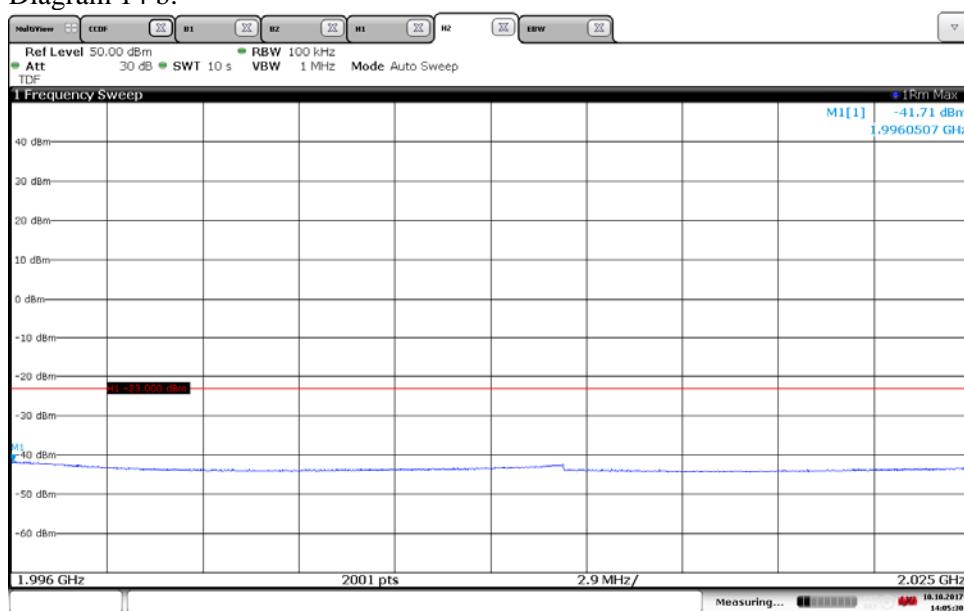
13:59:20 10.10.2017

Diagram 13 b:


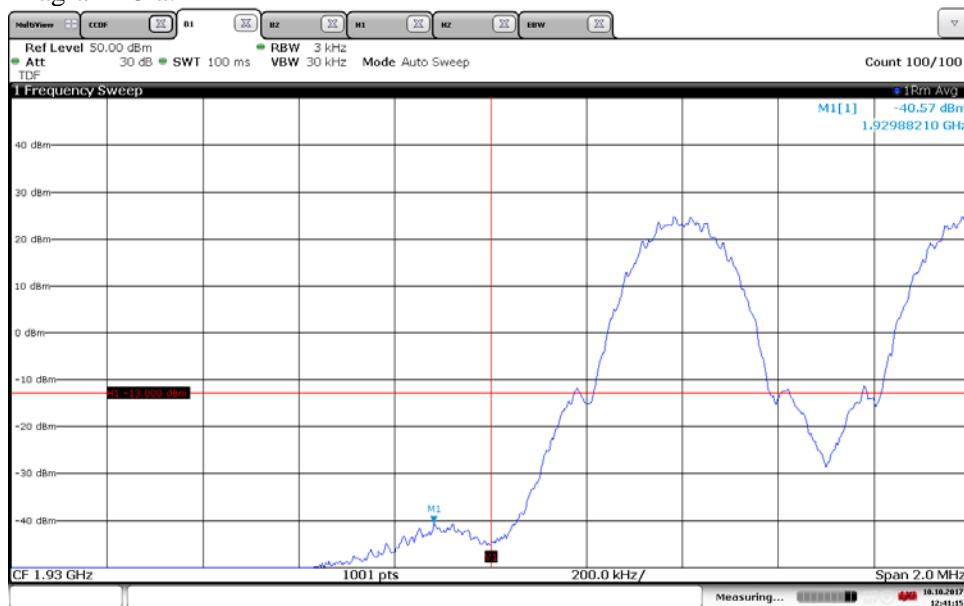
14:00:08 10.10.2017

Diagram 14 a:


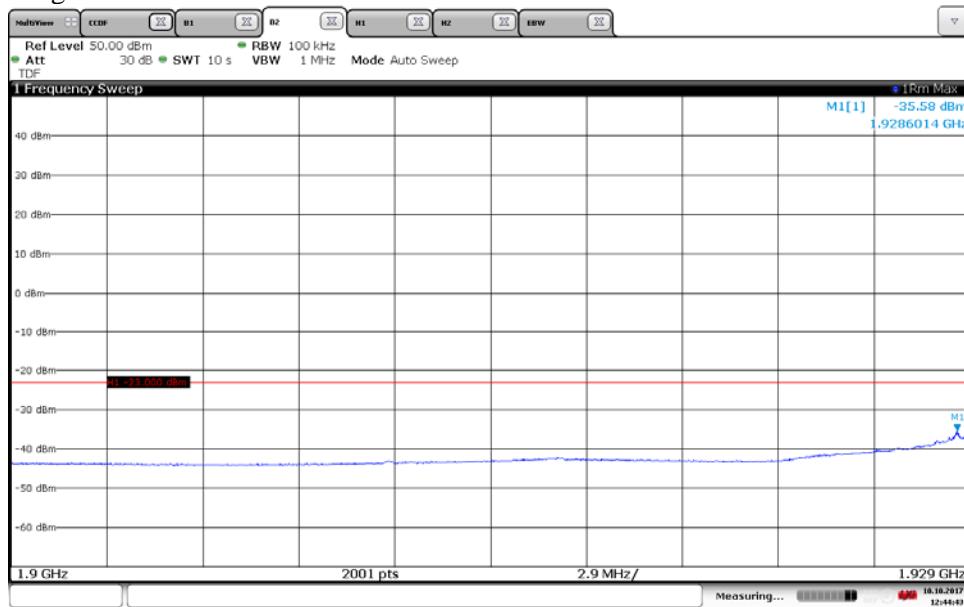
14:02:26 10.10.2017

Diagram 14 b:


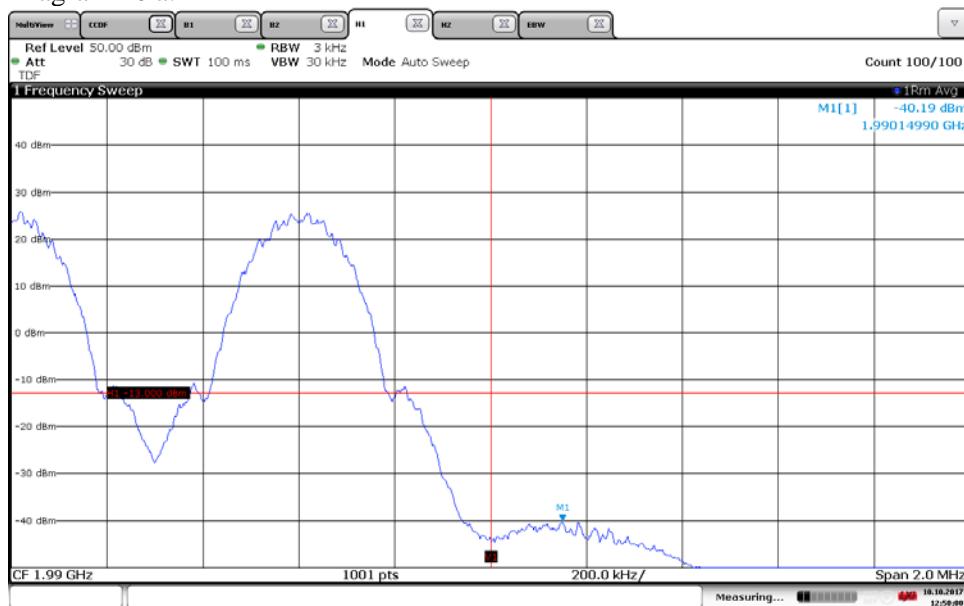
14:05:31 10.10.2017

Diagram 15 a:


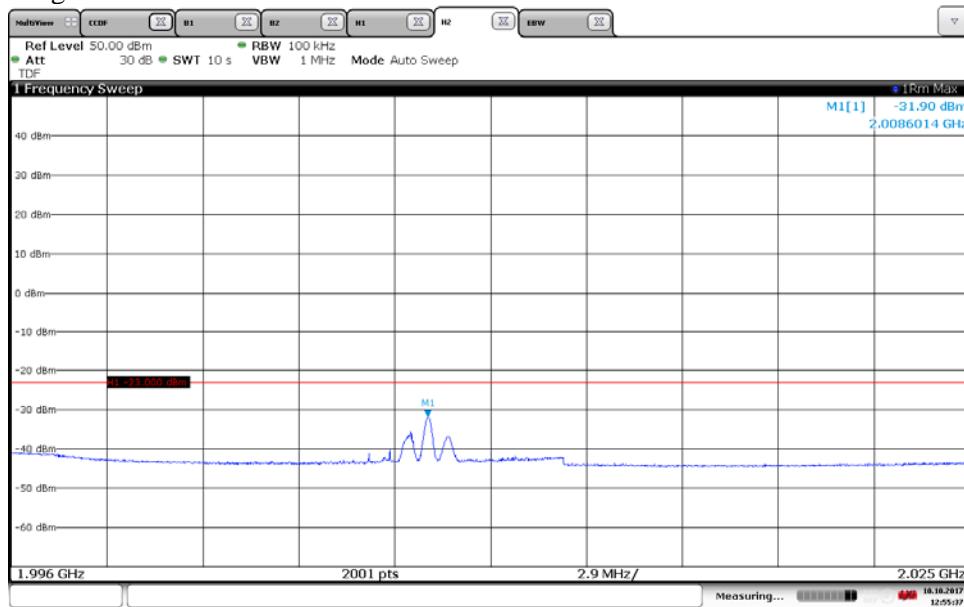
12:41:16 10.10.2017

Diagram 15 b:


12:44:44 10.10.2017

Diagram 16 a:


12:50:01 10.10.2017

Diagram 16 b:


12:55:37 10.10.2017

Conducted spurious emission measurements according to CFR 47 §24.238 / IC RSS-133 6.2

Date 2017-10-10	Temperature 22 °C ± 3 °C	Humidity 22% ± 5 %
--------------------	-----------------------------	-----------------------

Test set-up and procedure

The measurements were made per definition in §24.238. The output was connected to a spectrum analyzer with a RBW setting of 1 MHz and RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements

Measurement equipment	RISE number
R&S FSW 43	902 073
RF attenuator	900 691
HP filter	BX40074
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Single carrier

Diagram	Modulation	Symbolic name	Tested Port
1 a-b	GMSK	B+1	RF C
2 a-b	GMSK	T-1	RF C
3 a-b	GMSK	M	RF C
4 a-b	8PSK	M	RF C
5 a-b	AQPSK	M	RF C
6 a-b	GMSK	M	RF A
7 a-b	GMSK	M	RF B
8 a-b	GMSK	M	RF D

Multi carrier

Diagram	Modulation	Symbolic name	Tested Port
9 a-c	GMSK	M4	RF C
10 a-c	GMSK	Bim	RF C
11 a-c	GMSK	Tim	RF C

Note: Measurements were mainly limited to port RF C due to the measurement result in single carrier mode that shows that the ports are electrical identical as declared by the client.

Remark

The emission at 9 kHz on the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.


The upper frequency boundary covers 10x the highest TX fundamental frequency.

Limits


CFR 47 §24.238 and RSS-133 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.


Complies?	Yes
-----------	-----

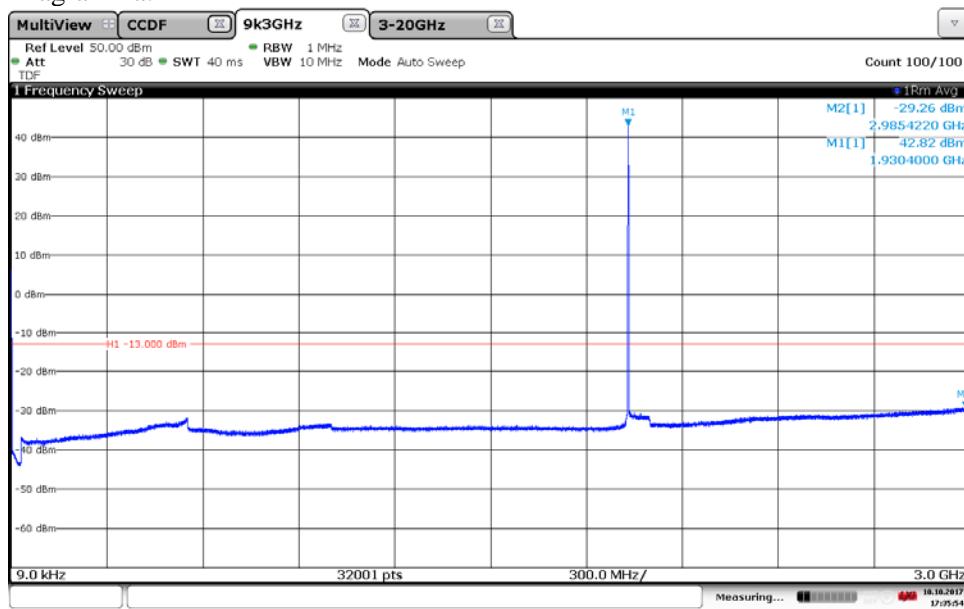Diagram 1a:


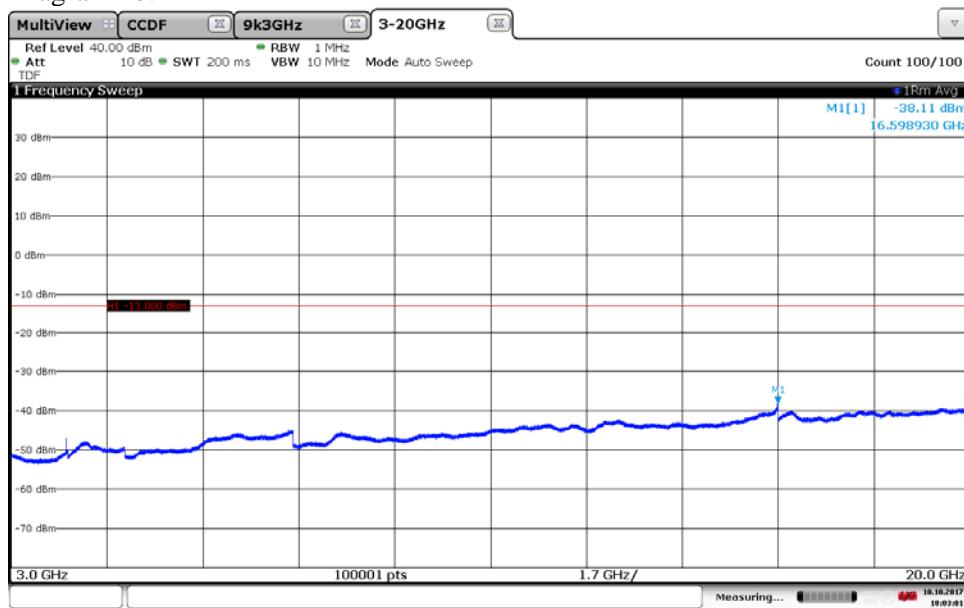
17:35:55 10.10.2017

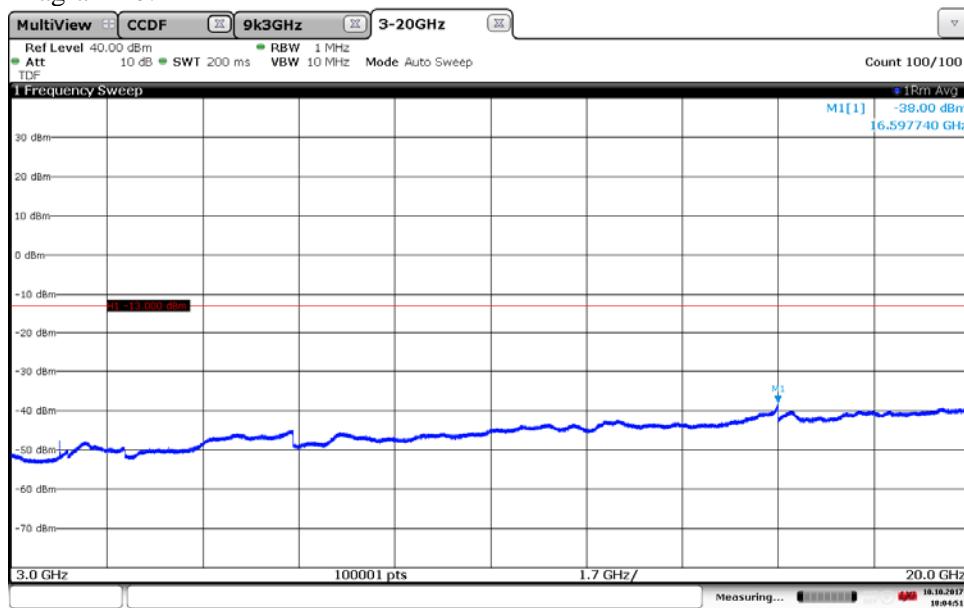Diagram 1b:


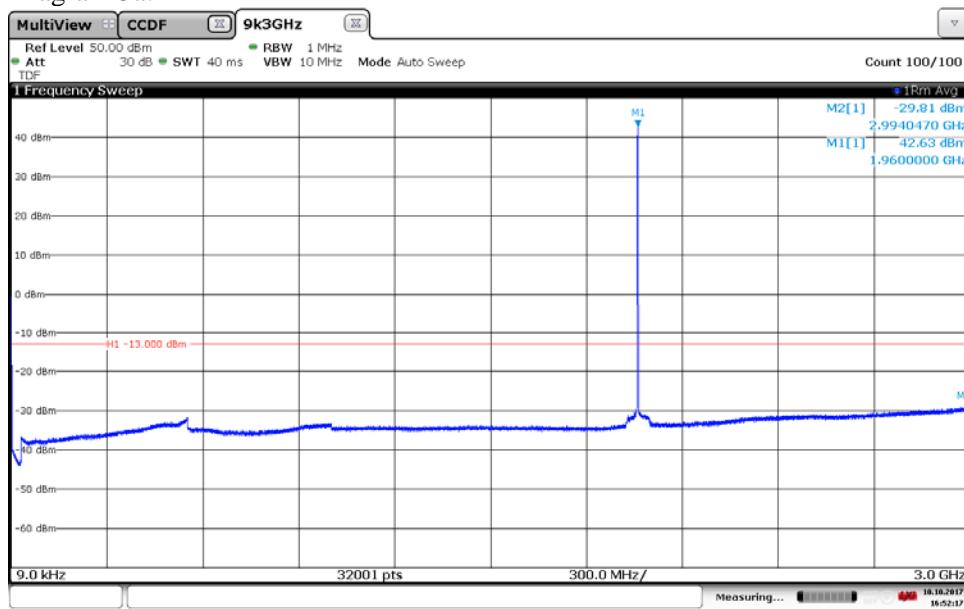
18:04:51 10.10.2017

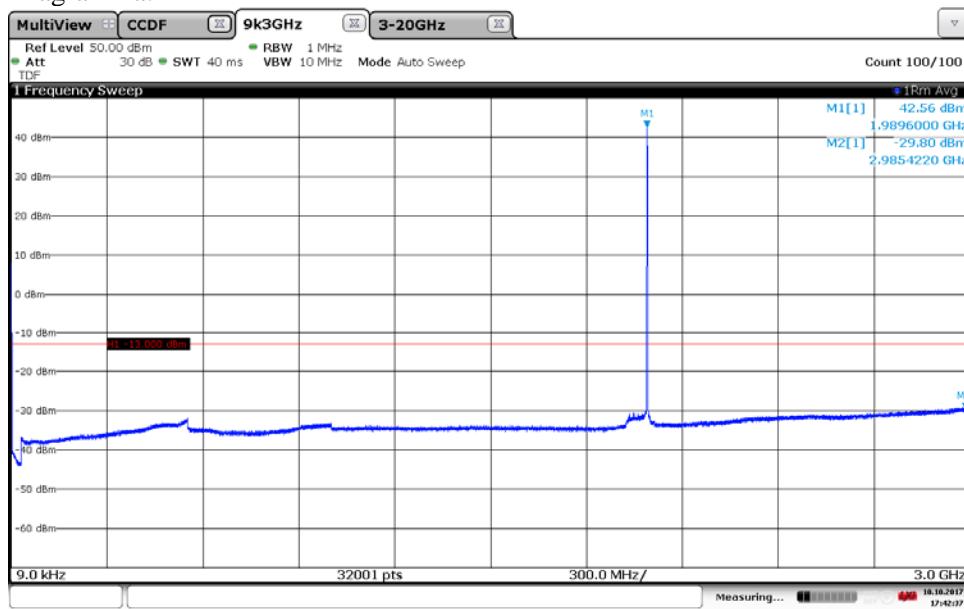Diagram 2a:


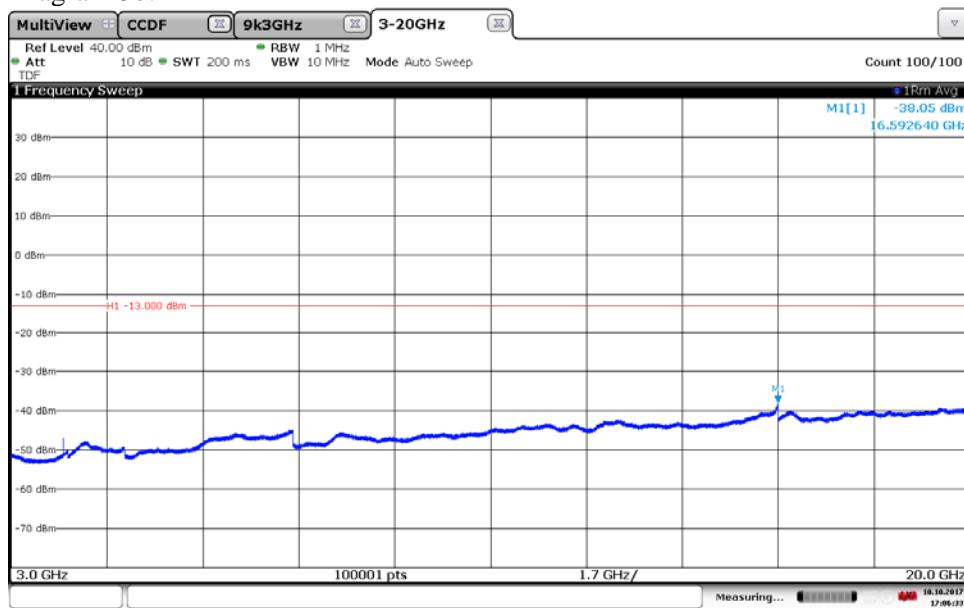
17:42:37 10.10.2017

Diagram 2b:


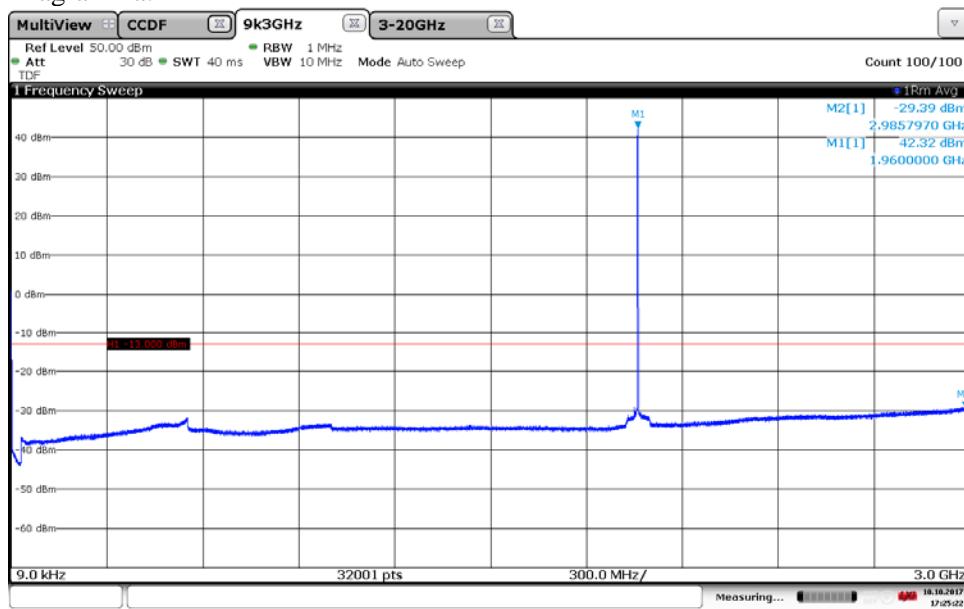
10:03:01 10.10.2017

Diagram 3a:


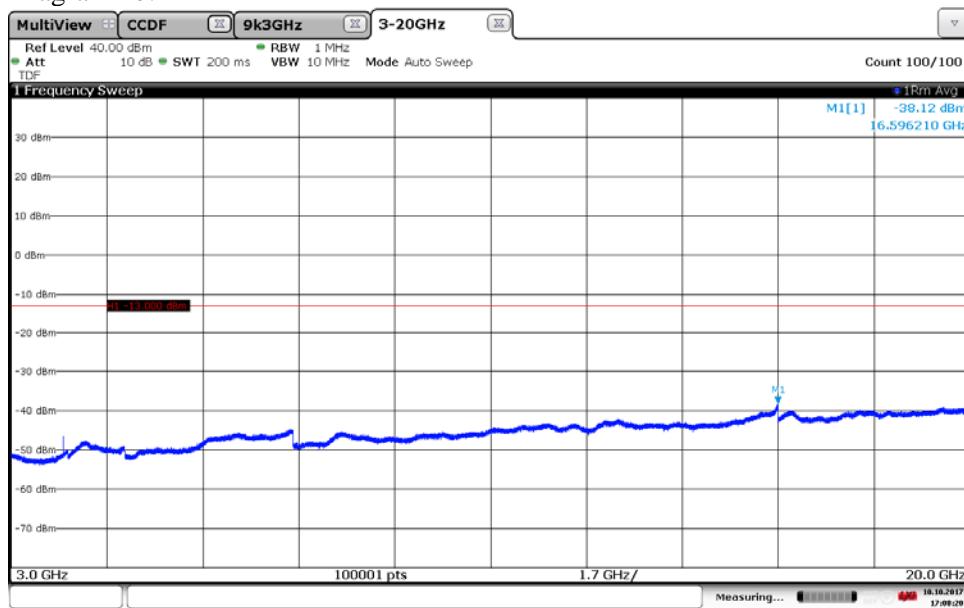
16:52:18 10.10.2017

Diagram 3b:


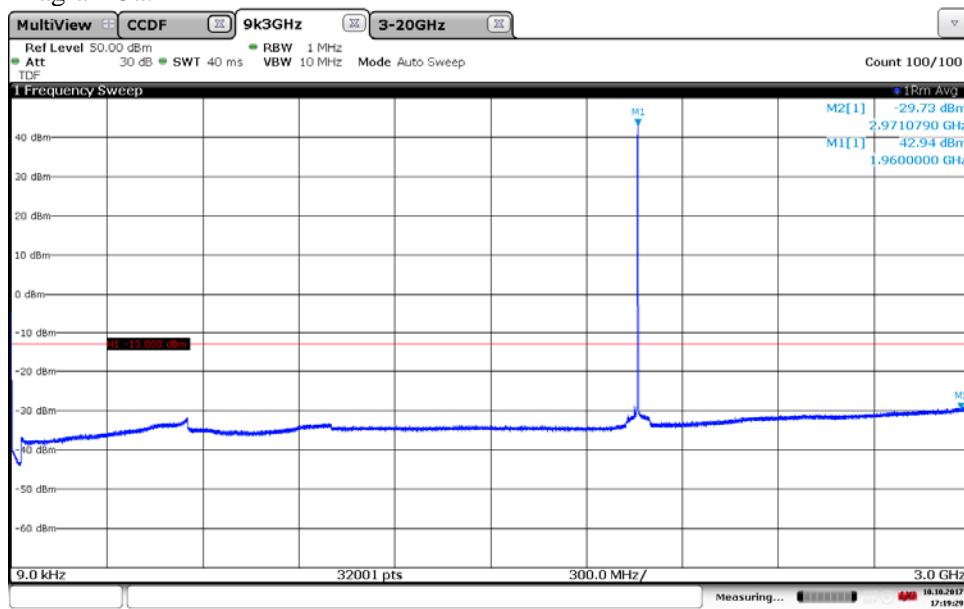
17:06:33 10.10.2017

Diagram 4a:


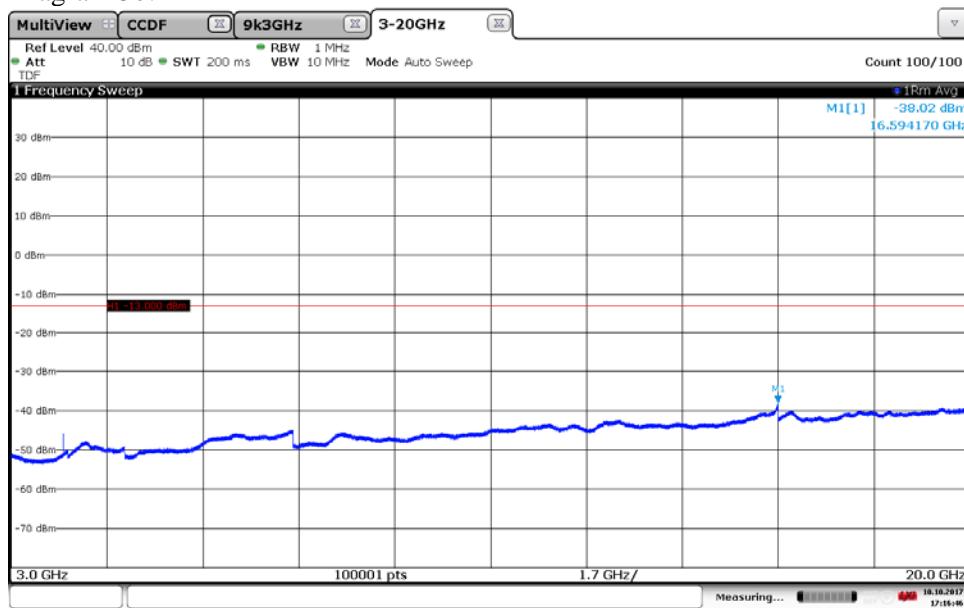
17:25:23 10.10.2017

Diagram 4b:


17:00:20 10.10.2017


Diagram 5a:


17:19:30 10.10.2017

Diagram 5b:


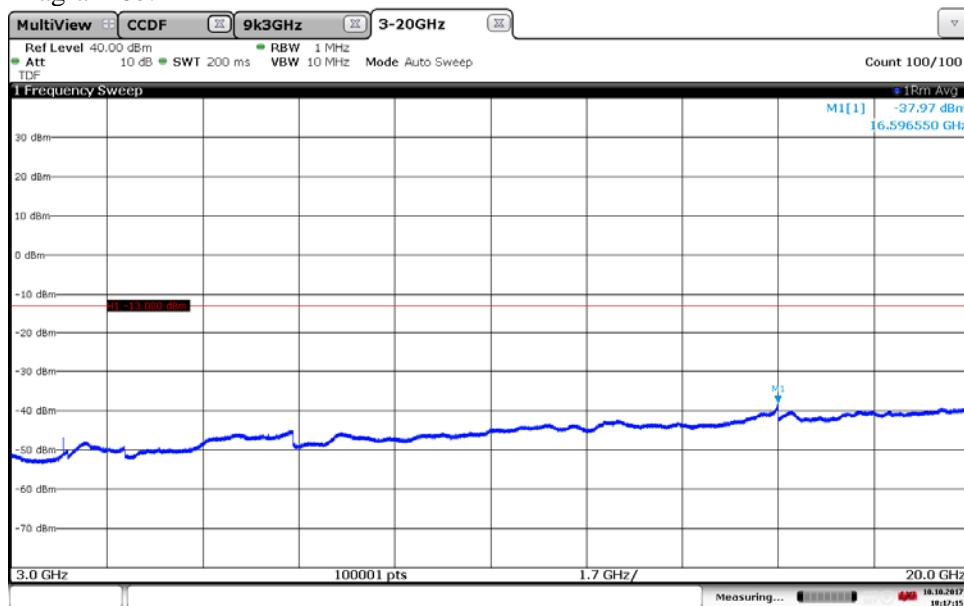
17:16:47 10.10.2017

Diagram 6a:

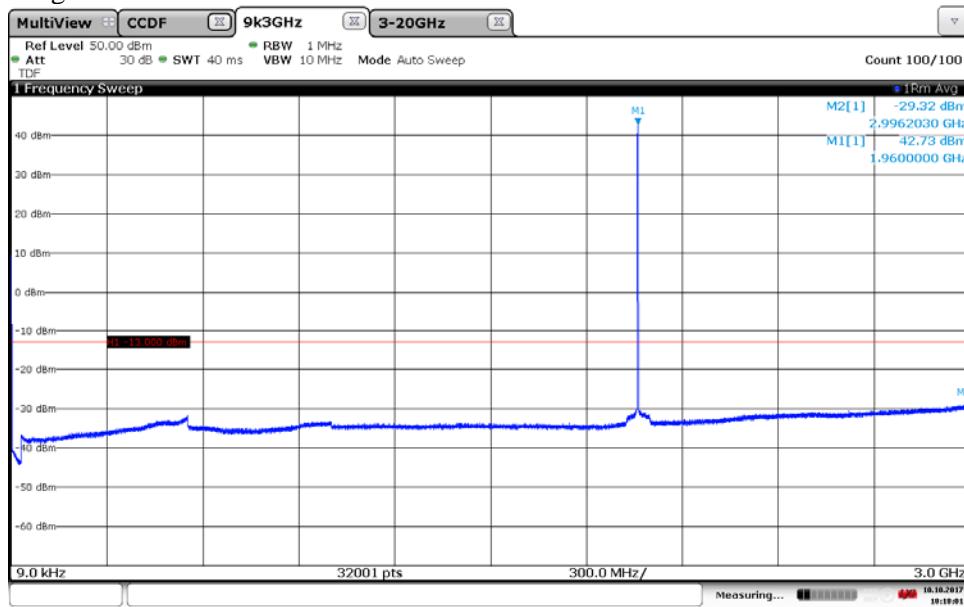

10:10:01 10.10.2017

Diagram 6b:



10:17:15 10.10.2017




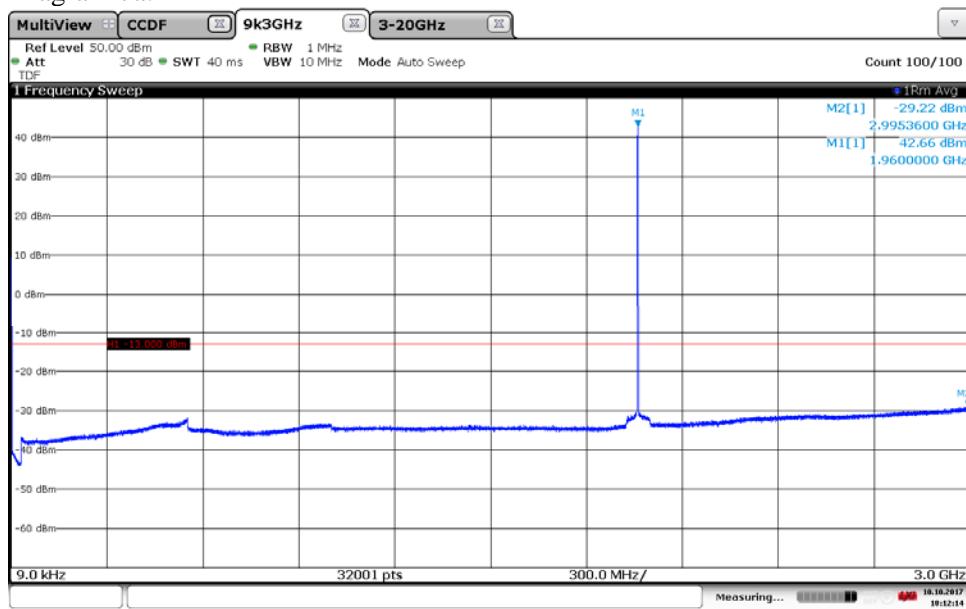
Diagram 7a:

Diagram 7b:


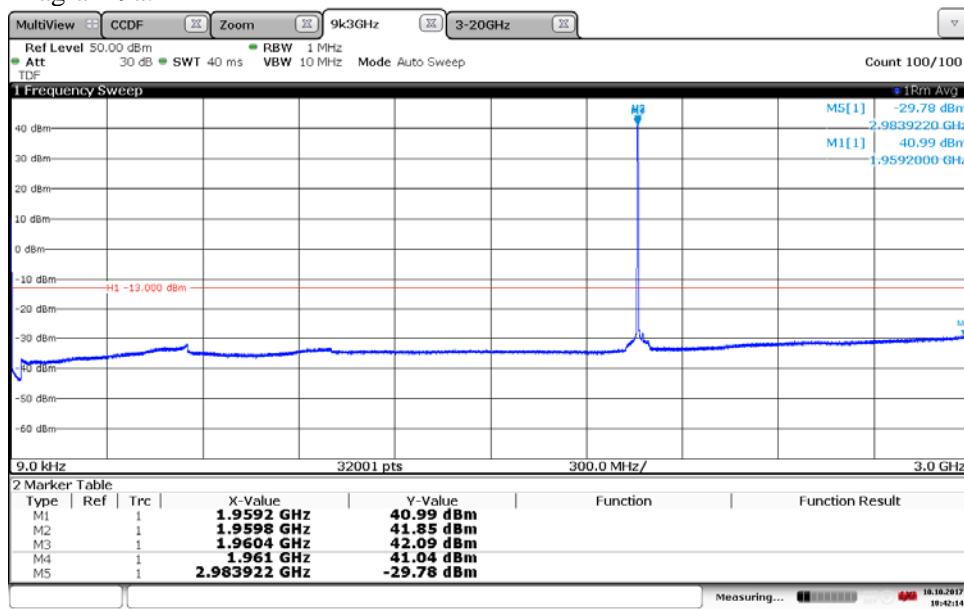
Diagram 8a:


10:09:45 10.10.2017

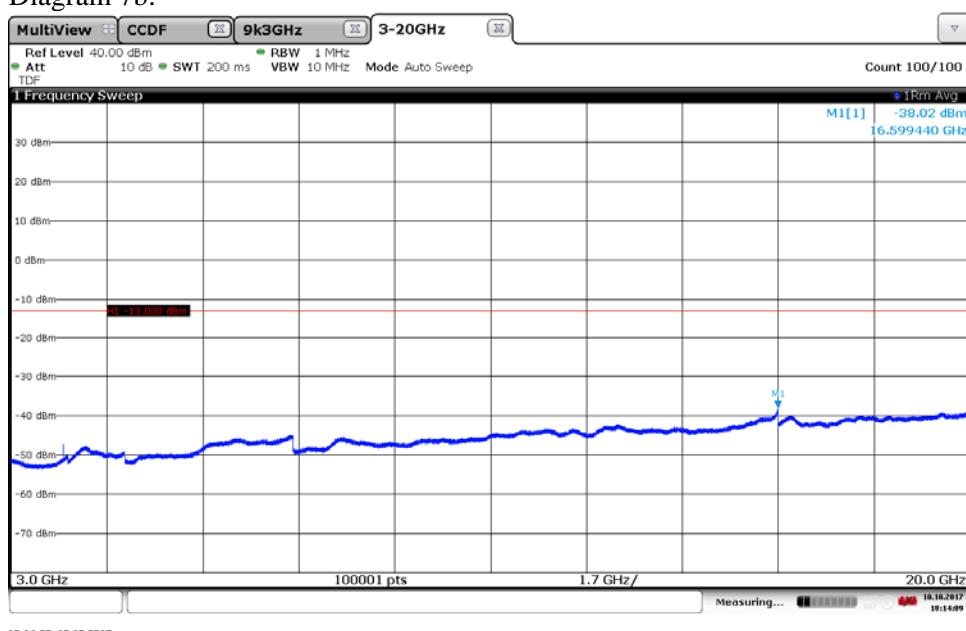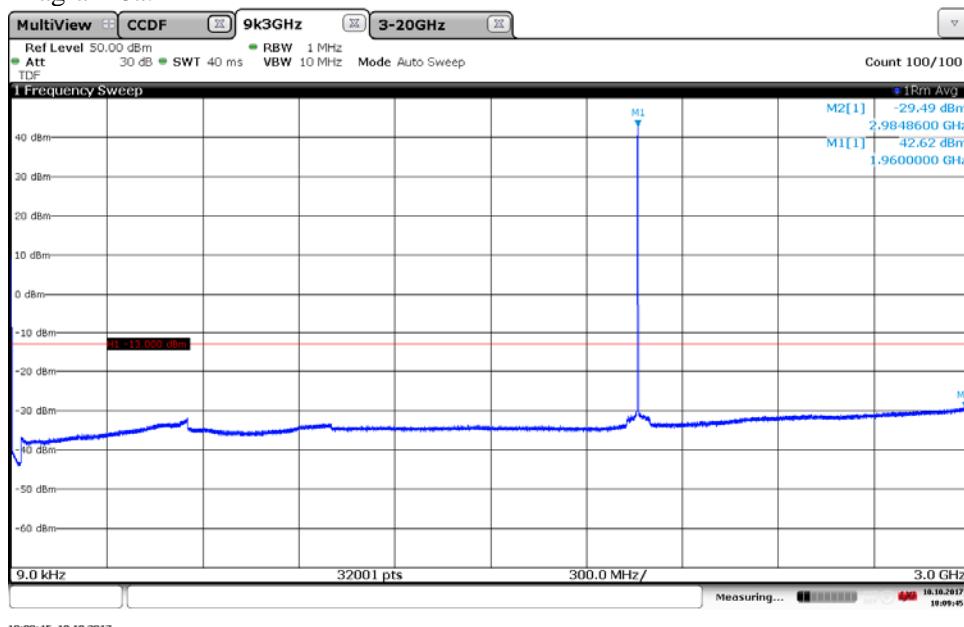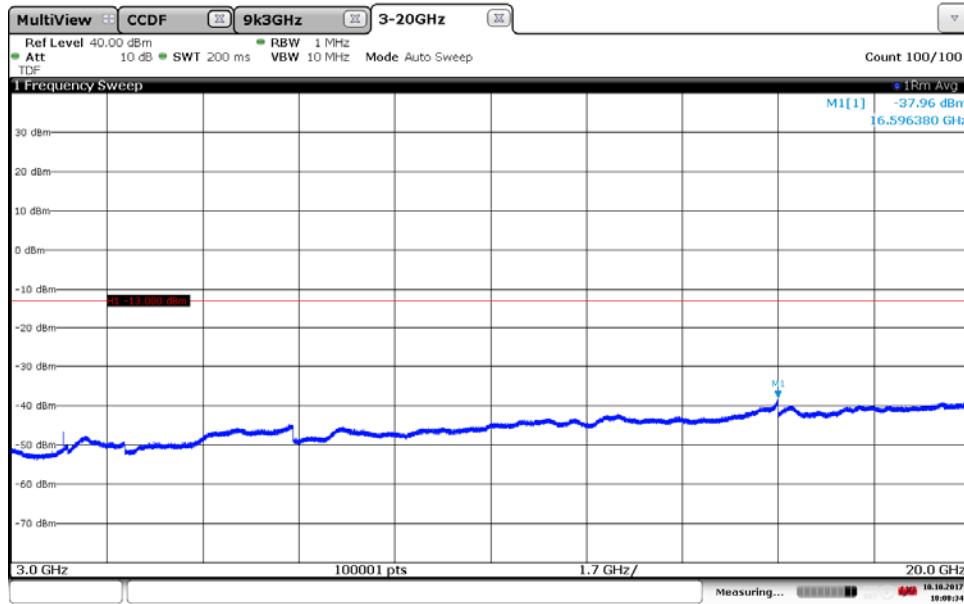


10:09:45 10.10.2017

Diagram 8b:

Diagram 9a:


10:42:15 10.10.2017

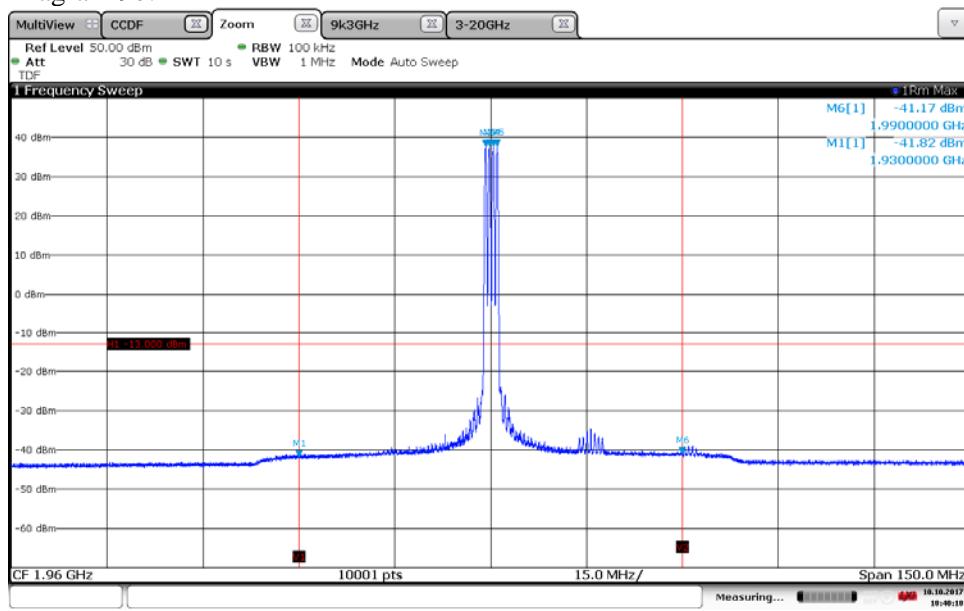Diagram 9b:


10:40:18 10.10.2017

Note: Due to the use of reduced measurement bandwidth the limit should be adjusted by 10 dB to -23 dBm.

Diagram 9c:

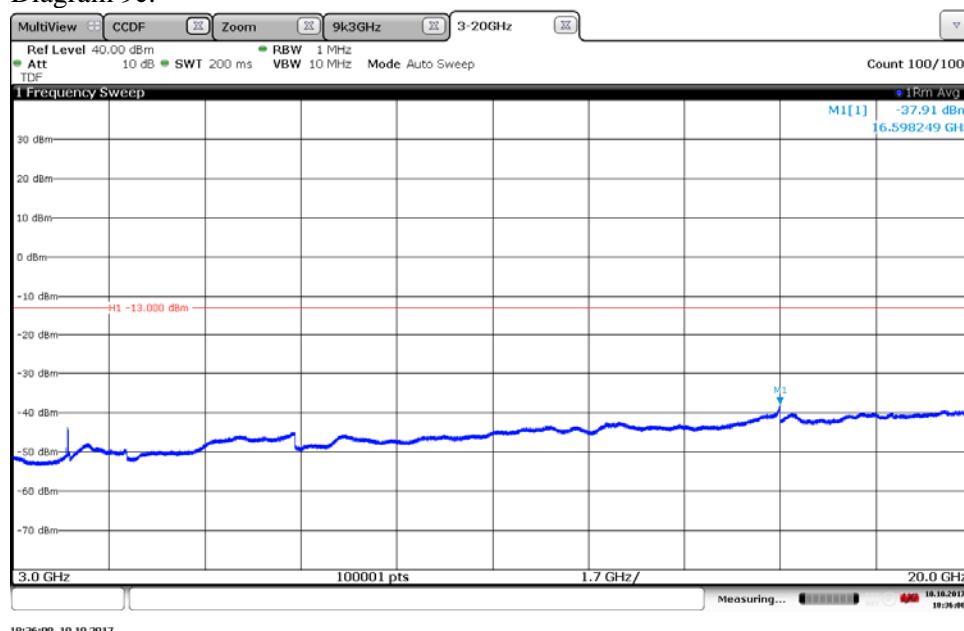
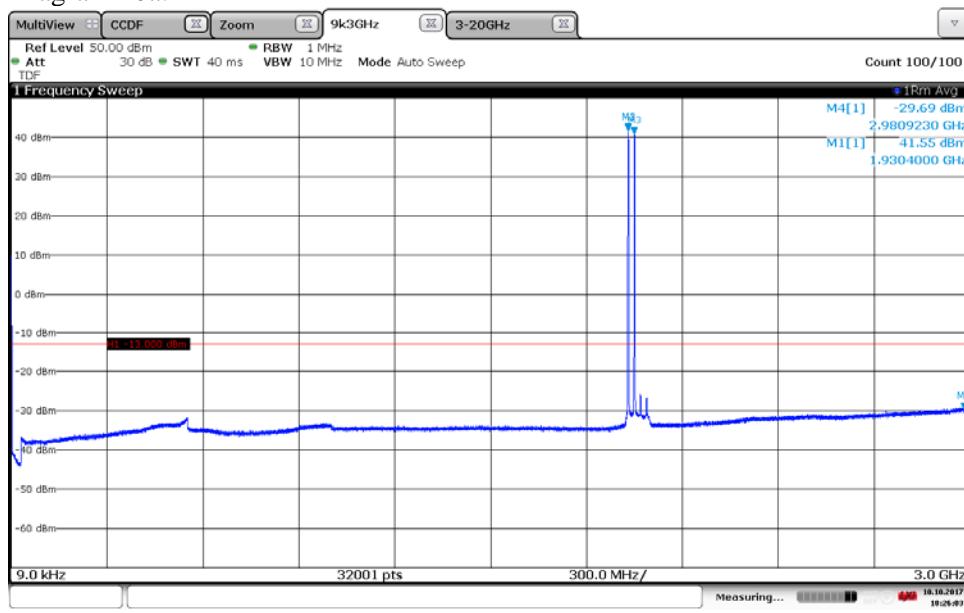
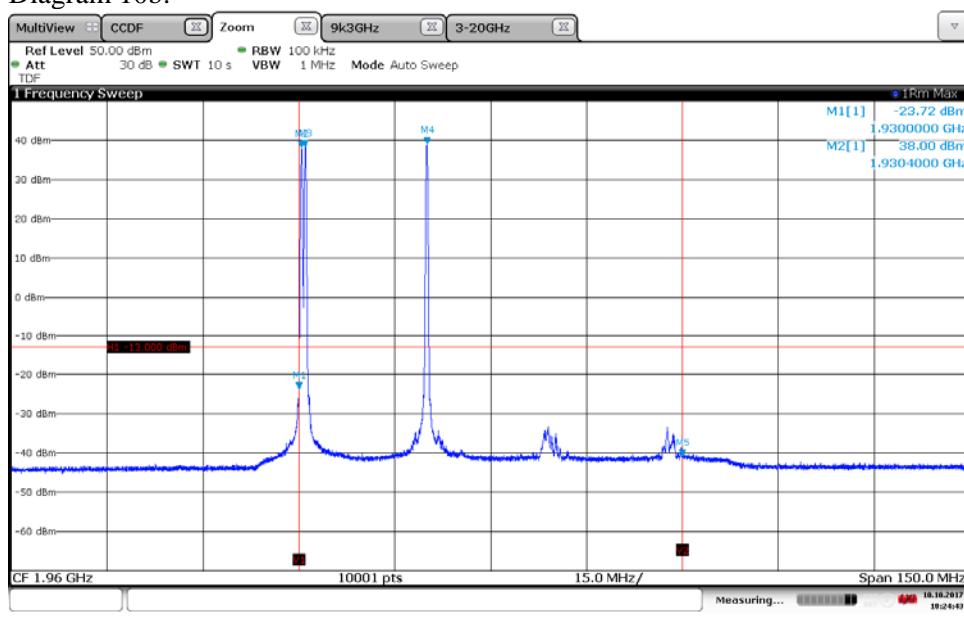


Diagram 10a:

Diagram 10b:


Note: Due to the use of reduced measurement bandwidth the limit should be adjusted by 10 dB to -23 dBm.

Diagram 10c:

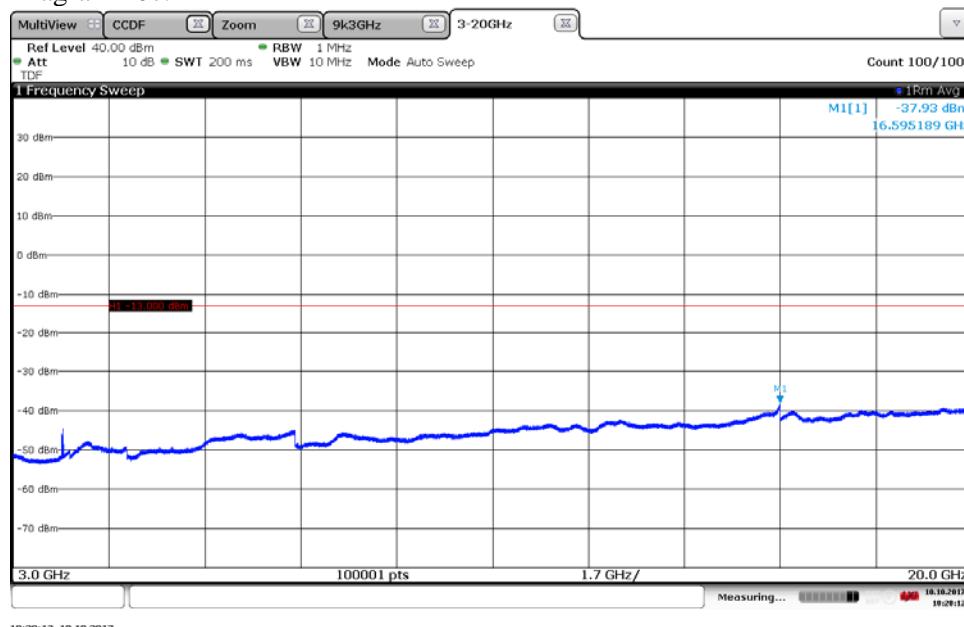
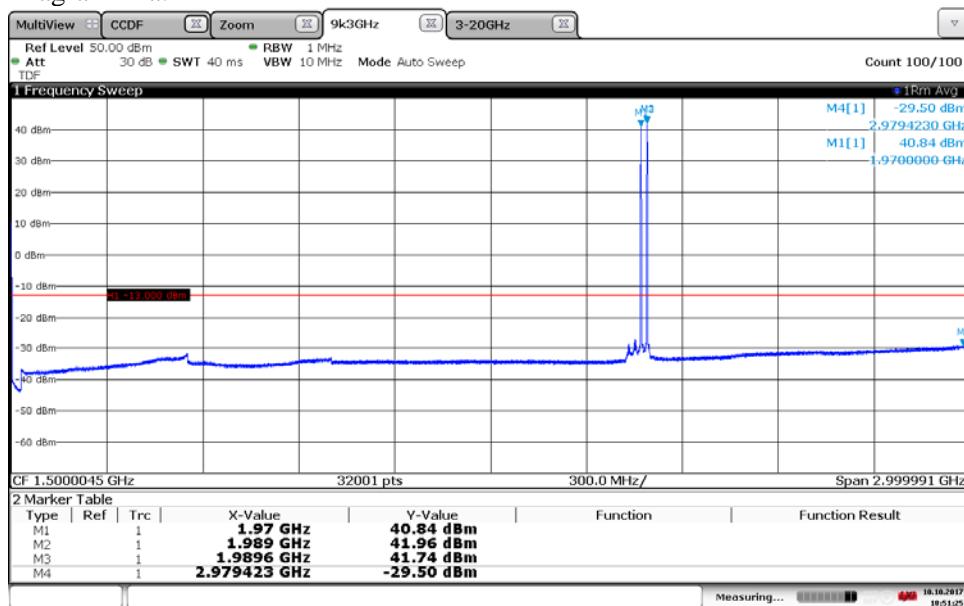
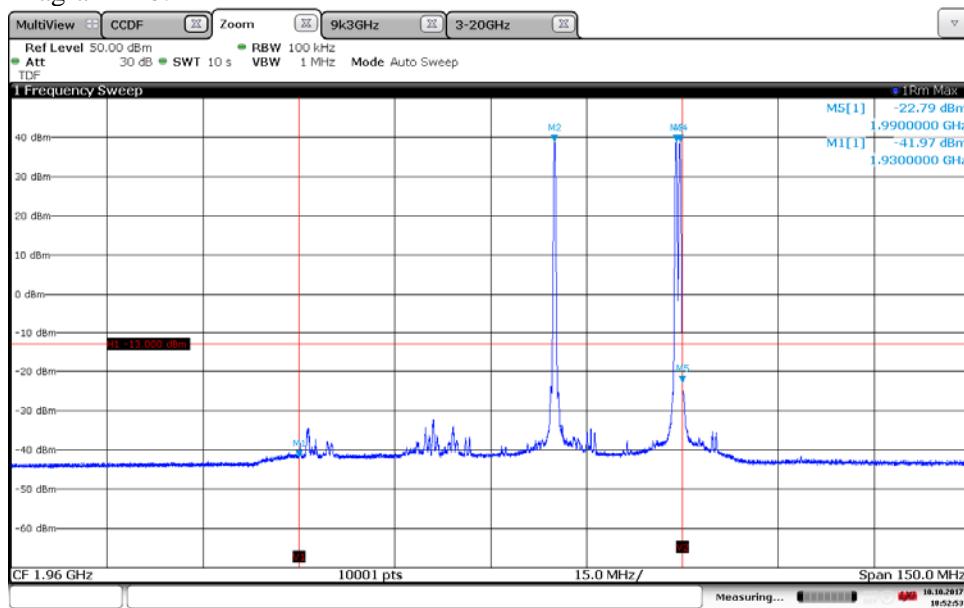


Diagram 11a:


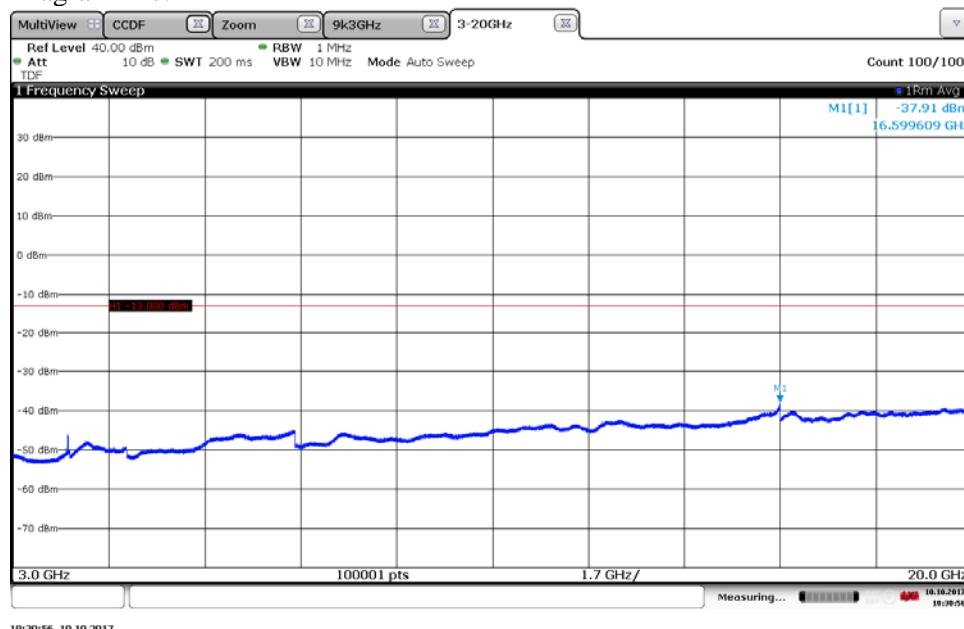
10:51:25 10.10.2017

Diagram 11b:


10:52:54 10.10.2017

Note: Due to the use of reduced measurement bandwidth the limit should be adjusted by 10 dB to -23 dBm.

Diagram 11c:



Field strength of spurious radiation measurements according to CFR 47 §24.238 / IC RSS-133 6.5

Date	Temperature	Humidity
2017-09-14	22 °C ± 3 °C	45 % ± 5 %
2017-10-03	22 °C ± 3 °C	47 % ± 5 %
2017-10-04	23 °C ± 3 °C	38 % ± 5 %
2017-10-05	22 °C ± 3 °C	34 % ± 5 %

The test site conform to the site validation criterion specified in ANSI C63.4 2014. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1 m in the frequency range 18 GHz – 20 GHz.

RF absorbers were covering a floor area in the frequency range 1 GHz – 18 GHz to comply with site validation requirements according to ANSI C63.4-2014.

The EUT was placed 0.8 m above reference ground plane in frequency range 30 MHz – 1 GHz and 1.5 m above reference ground plane in frequency range 1 GHz – 20 GHz.

The measurement was performed with a RBW of 1 MHz.


A propagation loss in free space was calculated. The used formula was

$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \quad \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$


The measurement procedure was as the following:

1. A pre-measurement is performed with peak detector. For measurement < 1 GHz the test object was measured in eight directions with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m. For measurements > 1 GHz the test object was measured in seventeen directions with the antenna height 1.0 m, 1.5 m and 2m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to ANSI 63.26.

The test set-up during the spurious radiation measurements is shown in the picture below:
30-1000 MHz

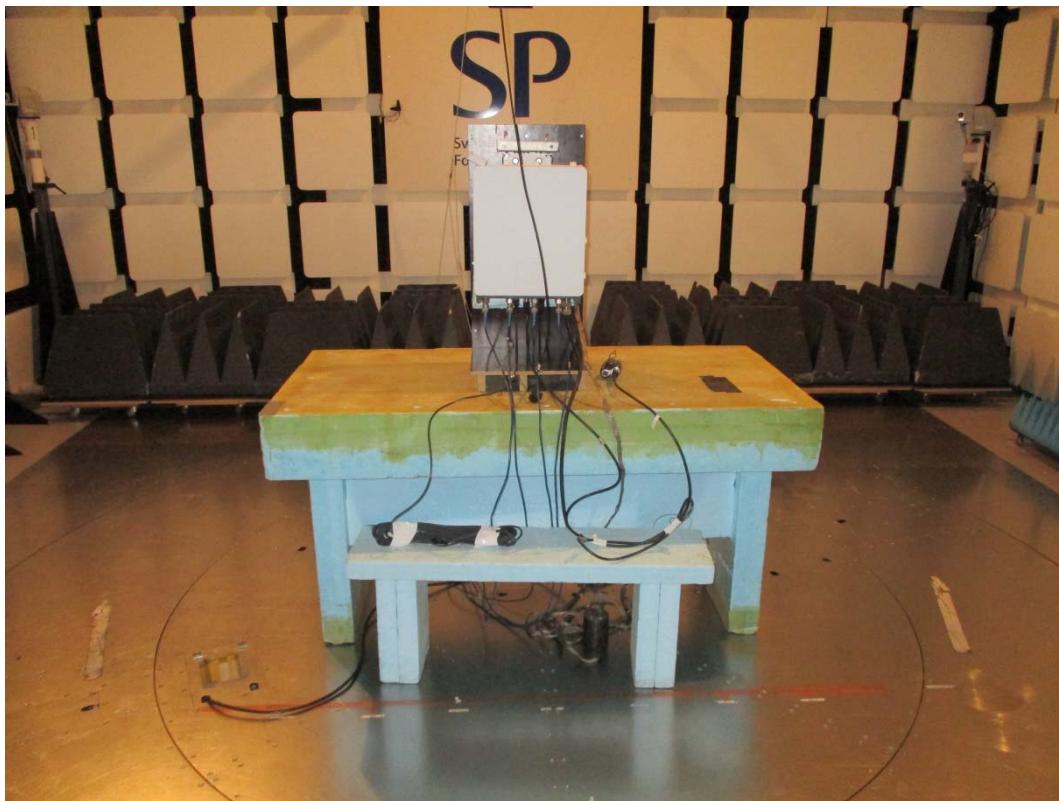

1-18GHz

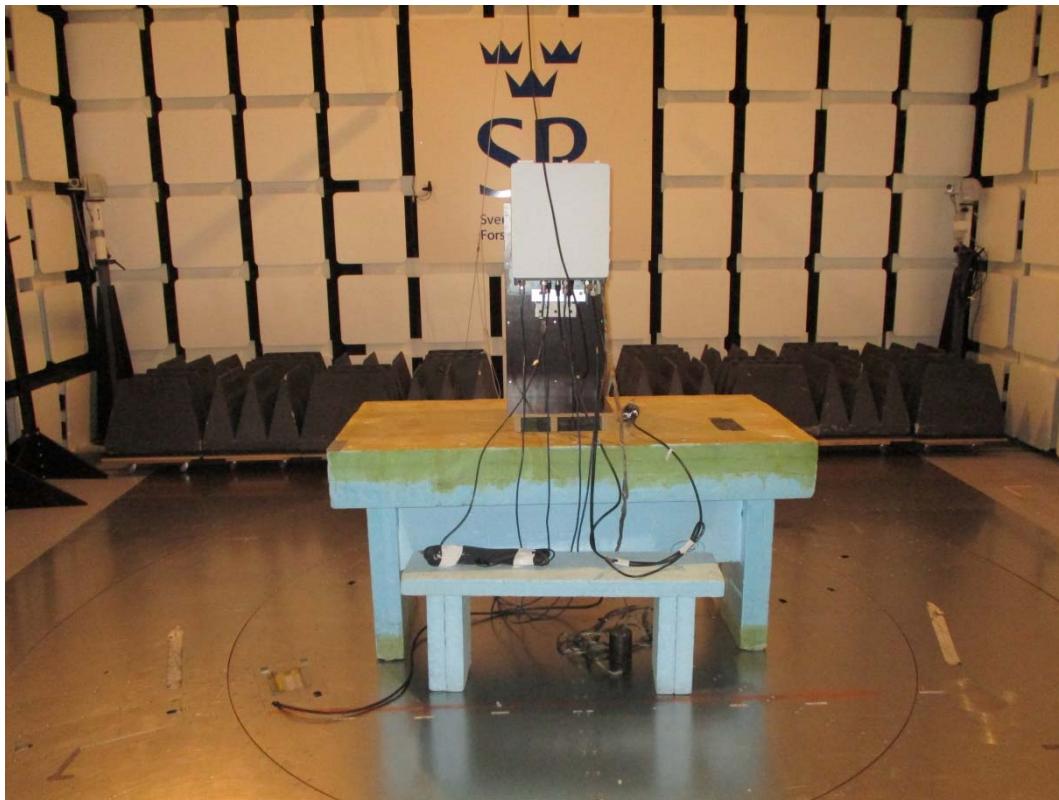

Measurement equipment

Measurement equipment	RISE number
Semi anechoic chamber Tesla	503 881
R&S ESU 40	901 385
EMC 32 ver.10.20.01	BX62351
ETS Lindgren BiConiLog 3142E	BX61914
ETS Lindgren Horn Antenna 3115	502 175
Flann STD Gain Horn Antenna 20240-20	503 674
μComp Nordic, Low Noise Amplifier	901 545
Miteq, Low Noise Amplifier	503 278
HP Filter 3-26.5 GHz	901 502
Temperature and humidity meter, Testo 625	504 188

Results

Tested configurations: M, B2, M2, T2, Bim and Tim

representing worst case: Symbolic name T2, GMSK, Diagram 1 a-d

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-20000	All emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty: 3.1 dB

Limits

CFR 47 §24.238 and IC RSS-133 6.5

(g) Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----

Diagram 1a:


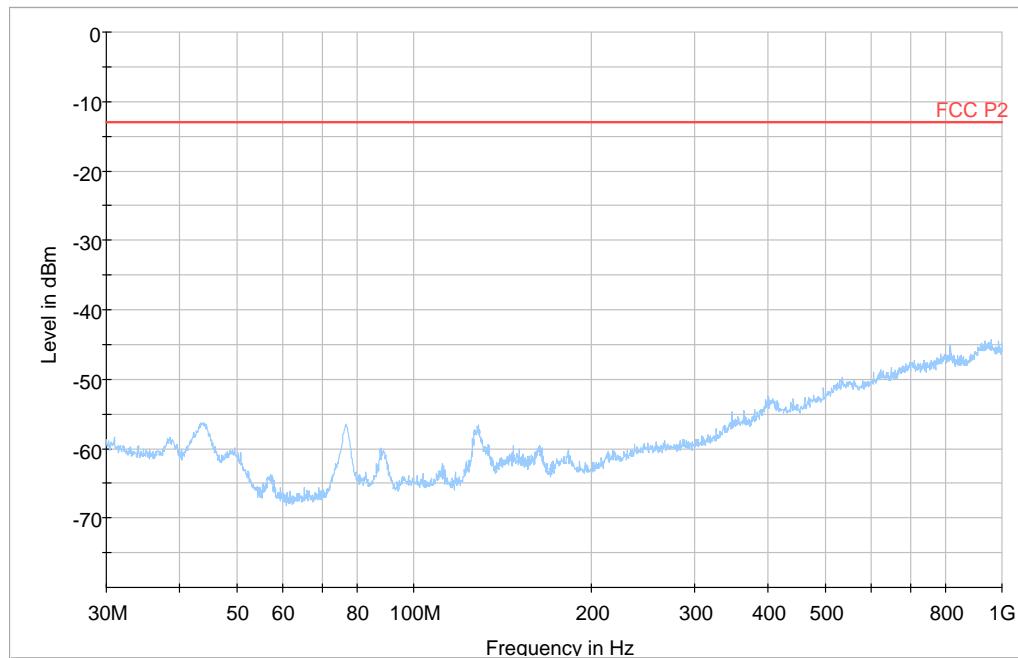


Diagram 1b:

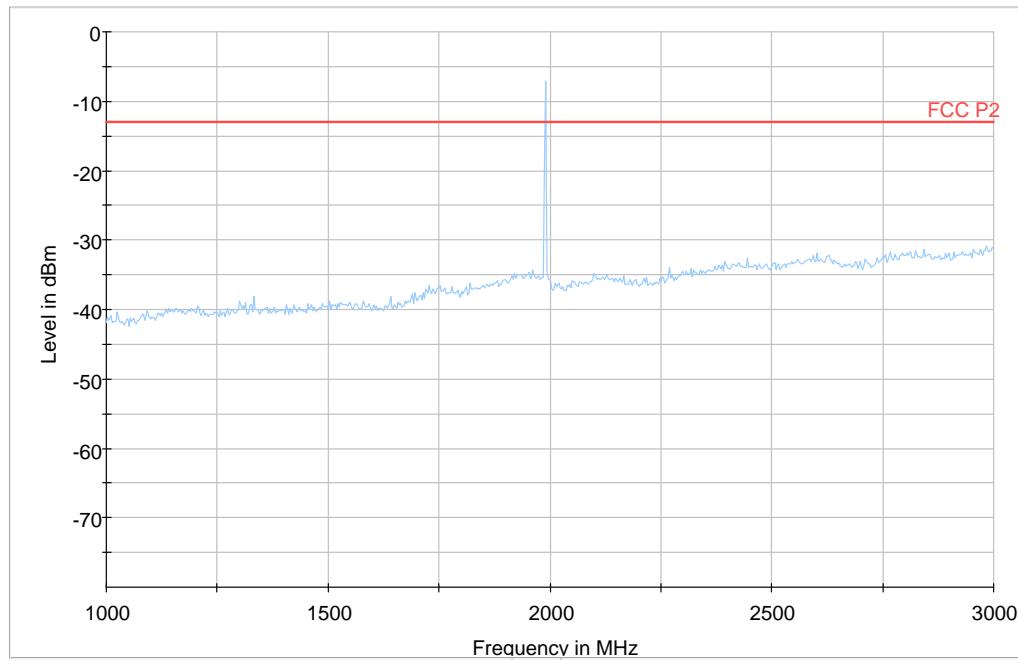

Note: The emission at 1989.0 and 1989.6 MHz is the carrier frequency and shall be ignored in the context.

Diagram 1c:


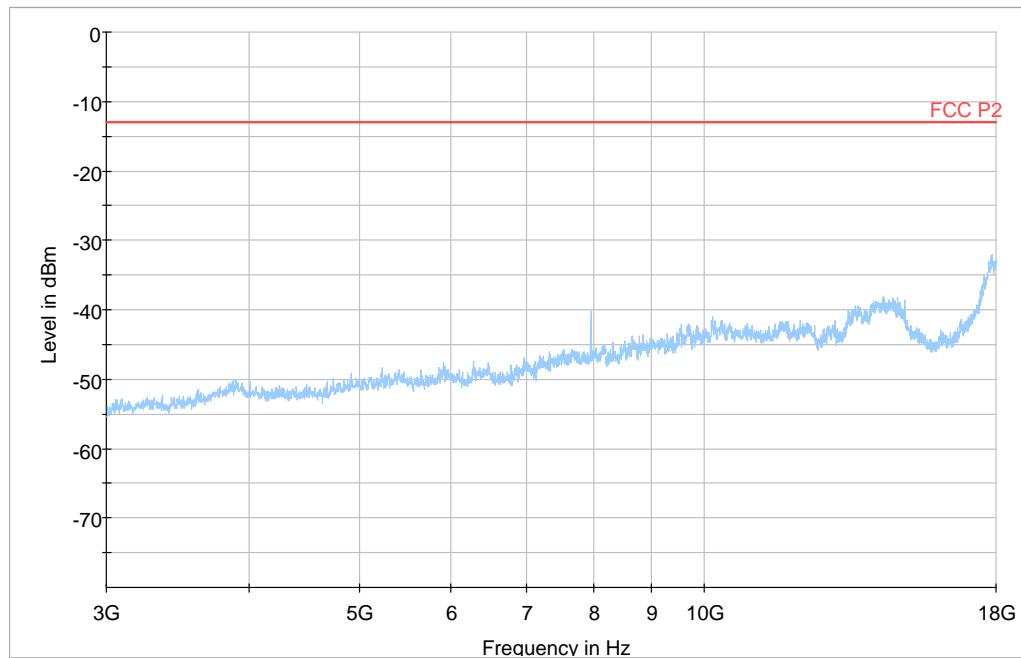


Diagram 1d:

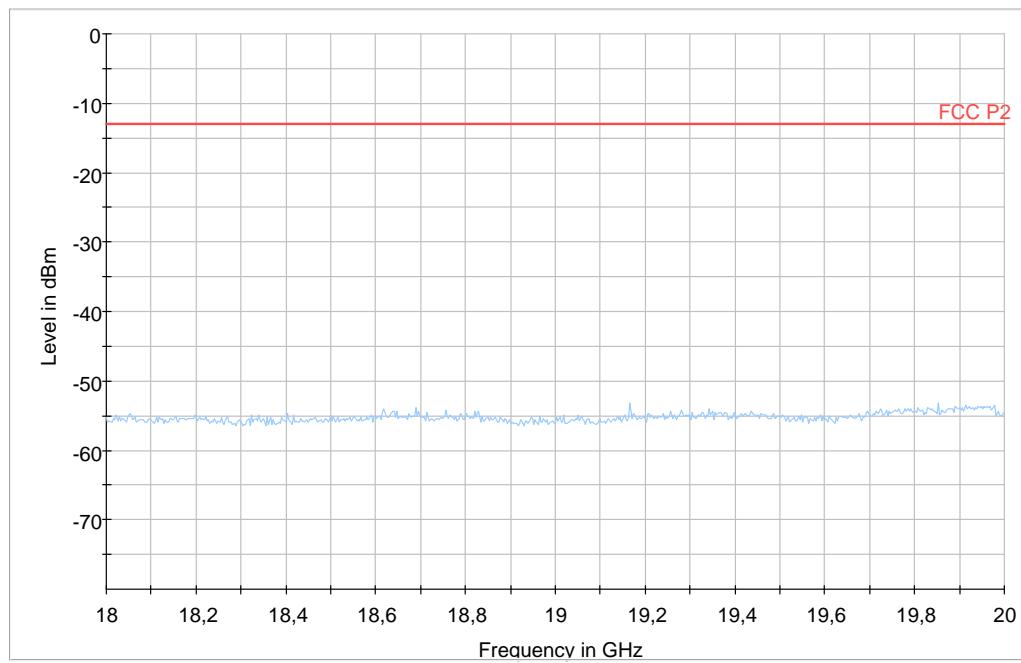

Frequency stability measurements according to CFR 47 § 24.235 / IC RSS 133 6.3

Date	Temperature (test equipment)	Humidity (test equipment)
2017-10-12	23 °C ± 3 °C	35% ± 5 %
2017-10-13	22 °C ± 3 °C	20% ± 5 %
2017-10-15	23 °C ± 3 °C	36% ± 5 %

Test set-up and procedure

The measurement was made per 3GPP TS 37.141. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

The measurement was also made per IC RSS 199 Issue 3, 4.3. Using a resolution bandwidth of 1% of the emission bandwidth, a reference point at the unwanted emission level which complies with the attenuation of $43 + 10 \log_{10} p$ (watts) (i.e. -13 dBm) at the band edge of the lowest and highest channel was selected, and the frequency at these points was recorded as fL and fH respectively.

Measurement equipment	RISE number
R&S FSQ 40	504 143
Rohde & Schwarz signal analyzer FSW 43	902 073
RF attenuator	900 691
Temperature Chamber	503 360
Testo 635, temperature and humidity meter	504 203
Multimeter Fluke 87	502 190

Results

Nominal transmitter frequency was 1960 MHz (M). Rated output power level at connector RF A (maximum): 43 dBm.

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	Temp. (°C)	
40.8	+20	15
55.2	+20	16
48	+20	15
48	+30	13
48	+40	17
48	+50	12
48	+10	16
48	0	-17
48	-10	-17
48	-20	16
48	-30	16
Maximum freq. error (Hz)		17
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Rated output power level at connector RF B (maximum): 38.2 dBm

Test conditions			Frequency margin to band edge at -13dBm			
Supply voltage DC [V]	Temp [°C].	Carrier Bandwidth [MHz]	Test frequency Symbolic name Bottom		Test frequency Symbolic name Top	
			fL [MHz]	Offset to lower band edge (1930 MHz) [kHz]	fH [MHz]	Offset to upper band edge (1990 MHz) [kHz]
-48.0	+20	0.2	1930.019	19	1989.975	25

The frequency error results clearly shows that the frequency stability is good enough to ensure that the transmitted carrier stay within the operating band.

Remark

It was deemed sufficient to test one combination of TX frequency, channel bandwidth configuration and test model (modulation), as all combinations share a common internal reference to derive the TX frequency from.

Limits

CFR 47 §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

RSS-133 6.3 Frequency stability:

The carrier frequency shall not depart from the reference frequency in excess of ± 1.0 ppm (± 1930 Hz) for base stations when tested to the temperature and supply voltage variations specified in RSS-Gen.

Complies?	Yes
-----------	-----

Photos of test object

Front side



Rear side



Left side



Right side



Bottom side



Top side



Labels:

Radiated measurements:

Radio label:



SFP module:



Conducted measurements:

Radio label:



SFP module:

