

Ericsson AB

RF TEST REPORT

Report Type:

RF report

PRODUCT NAME:

Radio 4480 44B2/B25 44B66A C

REPORT NUMBER:

2407B1219SHA-001

ISSUE DATE:

July 29, 2024

DOCUMENT CONTROL NUMBER:

TTRFFCC Part 24_V1 © 2018 Intertek



TEST REPORT

Applicant: Ericsson AB
Isafjordsgatan 10 SE-164 80 Stockholm 16480 Sweden

Manufacturer: Ericsson AB
Isafjordsgatan 10 SE-164 80 Stockholm 16480 Sweden

FCC ID: TA8AKRC161844

IC: 287AB-AS161844

SUMMARY:

The equipment is tested according to the following standard(s) or Specification:

FCC CFR 47 Part 24 (2023): PERSONAL COMMUNICATIONS SERVICES

ISED RSS-133 Issue 6: 2 GHz Personal Communications Services

PREPARED BY:

REVIEWED BY:



Project Engineer
Victor Yang

Reviewer
Jackson Huang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION	7
1.3 DESCRIPTION OF TEST FACILITY	8
2 TEST SPECIFICATIONS.....	9
2.1 RELATED DOCUMENTS	9
2.2 PRODUCT INFORMATION	9
2.3 CONFIGURATION DESCRIPTION	10
2.4 TEST SETUP	11
2.5 TEST ENVIRONMENT CONDITION:	12
2.6 INSTRUMENT LIST	13
2.7 MEASUREMENT UNCERTAINTY	14
3 MAXIMUM OUTPUT POWER AND PEAK TO AVERAGE POWER RATIO AND EIRP	15
3.1 LIMIT	15
3.2 MEASUREMENT PROCEDURE	15
3.3 MEASUREMENT RESULT	16
4 OCCUPIED BANDWIDTH	32
4.1 MEASUREMENT PROCEDURE	32
4.2 MEASUREMENT RESULT	33
5 UNWANTED EMISSIONS AT BAND EDGE	40
5.1 LIMIT	40
5.2 MEASUREMENT PROCEDURE	40
5.3 MEASUREMENT RESULT	41
6 CONDUCTED UNWANTED EMISSION	49
6.1 LIMIT	49
6.2 MEASUREMENT PROCEDURE	49
6.3 MEASUREMENT RESULT	50
7 FREQUENCY STABILITY	81
7.1 LIMIT	81
7.2 MEASUREMENT PROCEDURE	81
7.3 MEASUREMENT RESULT	82

Revision History

Report No.	Version	Description	Issued Date
2407B1219SHA-001	Rev. 01	Initial issue of report	July 29, 2024

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Max Output Power and Peak to Average Power Ratio and EIRP	24.232(a) 2.1046	RSS-133 6.4	Pass
Occupied Bandwidth	24.238(b) 2.1049	RSS-GEN 6.7	Pass
Unwanted Emissions at Band Edge	24.238(b) 2.1051	RSS-133 6.5	Pass
Conducted Unwanted Emission	24.238(b) 2.1051	RSS-133 6.5	Pass
Frequency Stability	24.235	RSS-133 6.3	Pass

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Description:	Remote Radio Unit
Product name:	Radio 4480 44B2/B25 44B66A C
Product number:	KRC 161 844/1 and KRC 161 844/3
HVIN	AS161844
Serial Number(s)	E23D966016
Rating:	-48VDC
Software Version:	CXP9024418_16-R2A231
Hardware Version:	R2D
Sample received date:	July 5, 2024
Date of test:	July 5, 2024 ~ July 11, 2024

TEST REPORT

1.2 Technical Specification

Frequency Range:	B2: TX: 1930-1990 MHz, RX: 1850-1910 MHz B25: TX: 1930-1995 MHz, RX: 1850-1915 MHz B66A: TX: 2110-2180 MHz, RX: 1710-1780 MHz
Number of Antenna ports:	4 TX/RX
Supported RAT:	B2: Single RAT: GSM, W, L, NB IoT, NR Multi RAT: G+W+NB IoT; G+L+NB IoT; W+L+NB IoT NR+L+NB IoT; G+L+NR; W+L+NR B25: Single RAT: W, L, NB IoT, NR Multi RAT: W+L+NB IoT; NR+L+NB IoT; W+L+NR B66A: Single RAT: W, L, NB IoT, NR Multi RAT: W+L+NB IoT; NR+L+NB IoT; W+L+NR
Max RF bandwidth (IBW):	B2: 60MHz, B25: 65MHz, B66A: 70MHz
Supported Number of Carriers:	WCDMA/LTE/NR: Max 6 carriers per port GSM: Max 4 carriers per port NB IoT SA: Max 2 carriers per port MRO: Max 12 carriers per port
Supported modulation:	LTE/NR: QPSK, 16QAM, 64QAM and 256QAM WCDMA: QPSK, 16QAM and 64QAM GSM: GMSK, AQPSK and 8-PSK NB IoT: QPSK, BPSK (BPSK is for up link only)
Supported Channel Bandwidth:	LTE: 1.4, 3, 5, 10, 15, 20MHz NR: 5, 10, 15, 20, 25, 30, 35, 40MHz WCDMA: 5MHz GSM: 200kHz NB-IoT: 200kHz
Declaration output power per port:	4*60W per band, Total 4*80W (without FAN), 4*100W (with FAN)

Note: Information in the 1.2 sheet declared by the manufacturer and Intertek has no responsibility of its accuracy.

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address 1:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Address 2:	No. 5 Lize East Street, Ericsson Tower, Chaoyang District, Beijing 100102 P.R.C.
Telephone:	+86 21 61278200
Telefax:	+86 21 54262353
The test facility is recognized, certified, or accredited by these organizations:	FCC Registration Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Related documents

FCC Part 24 (2023)
FCC Part 2 (2023)
ISED RSS-133 issue 6 January 2018
ANSI C63.26:2015
KDB 971168 D01 v03r01
KDB 662911 D01 v02r01
SRSP-510

2.2 Product Information

The Equipment Under Test (EUT) is an Ericsson Radio Unit working in the wireless communications services 1930-1995MHz which provides communication connections to network in GSM/WCDMA/LTE/NB IoT/NR modes and MSR modes. Radio 4480 44B2/B25 44B66A C operates from a -48VDC.

The EUT includes 4 TX/RX ports and it can be configured to transmit in MIMO mode, and MIMO mode was used for measurements as the worst configuration. The complete testing was performed with the EUT transmitting at maximum RF power unless otherwise stated.

The EUT has two product number and KRC 161 844/3 is physically and electrically identical to KRC 161 844/1. KRC 161 844/3 product is subject to additional product integrity testing qualified against NEBS. We test KRC 161 844/1 as a typical model and list the worst data.

A full technical description can be found in the Manufacturer's documentation.

TEST REPORT

2.3 Configuration Description

The following settings were used to represent all traffic scenarios. The output power was measured on the bottom, middle and top channel of all applicable antenna ports. By measuring the output power of QPSK, 16QAM, 64QAM, 256QAM on one of the antenna ports, it was determined that 64QAM for NR was the worst-case modulation schemes as data listed below and were used for all testing.

4TX/RX mode	Port	QPSK	16QAM	64QAM	256QAM
NR-1C 40M Middle	Port B	46.89dBm	46.86dBm	46.90dBm	46.88dBm

Complete testing was carried out on the worst-case antenna port which was established as being the highest output power from the 4 measured ports on worst case modulation scheme as data listed below. This antenna port was Port B for all modes.

4TX/RX mode	modulation	Port A	Port B	Port C	Port D
NR-1C 40M Middle	64QAM	46.86dBm	46.90dBm	46.82dBm	46.85dBm

The settings below were used for all measurements unless otherwise noted:

NR

Configuration	No. of Carriers	NR Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR-1C	1NR	25	1942.5	1962.5	1982.5
		30	1945	1962.5	1980
		35	1947.5	1962.5	1977.5
		40	1950	1962.5	1975
NR-2C	2NR	25	-	1942.5+1982.5	-
		30	-	1945+1980	-


NR

Configuration	No. of Carriers	NR Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR-1C-BE	1NR	25	1942.5	-	1982.5
		30	1945	-	1980
		35	1947.5	-	1977.5
		40	1950	-	1975
NR-2C-BE	2NR	25	1942.5+1967.5	-	1957.5+1982.5
		30	1945+1975	-	1950+1980

TEST REPORT

2.4 Test Setup

Conducted Measurement:

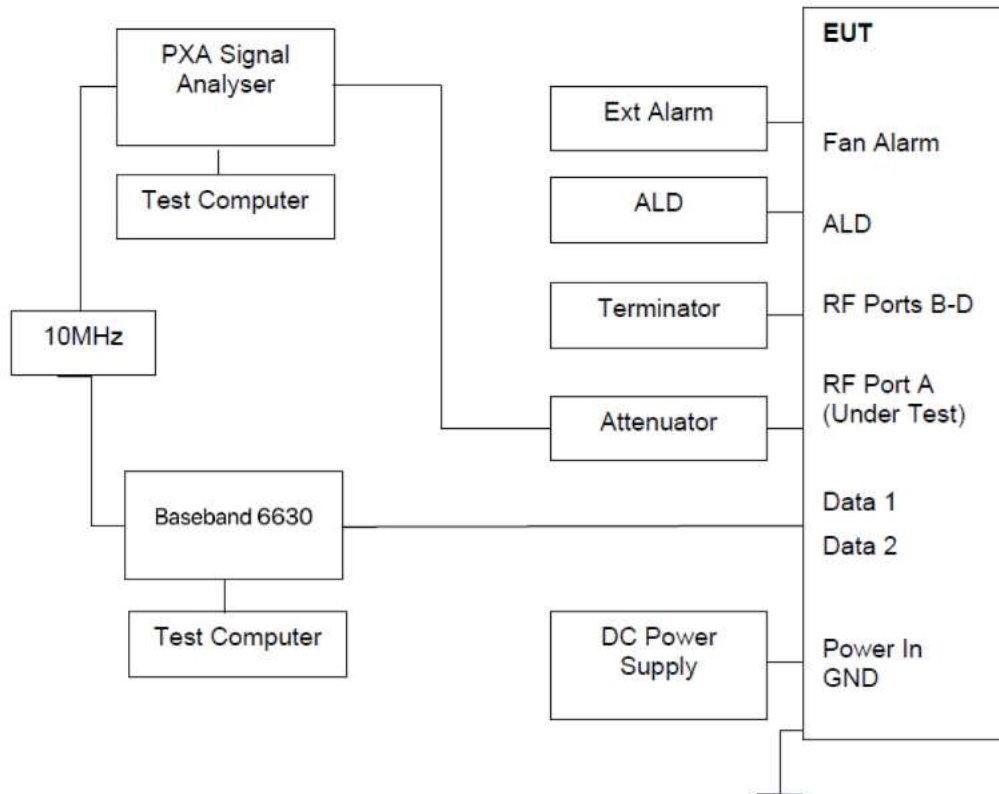

No.	Auxiliary Equipment	Product Number / Model Type	Version
1	SFP	RDH 102 75/3	R1A
2	SFP	RDH 102 75/3	R1A
3	Power Supply	N5768A	--
4	Terminator	WTF150-6G-C-HF TFZ150R-3NF TFZ100R-4NM	--
5	Attenuator	HBTE-CA100-6-40-N-55	--
6	Switch Box	1017018157	--
7	Digital unit	Baseband 6630	--

Proper Attenuator/Switch Box will be chosen to use in relative test case. And the cable loss of specified Attenuator/Switch Box with connect cable will be calibrated before test for relative frequency range and the worst reading will be used as offset in the relative test case.

TEST REPORT

2.5 Test environment condition:

Test items	Temperature	Humidity
Max Output Power and Peak to Average Power Ratio and EIRP	23°C	54% RH
Occupied Bandwidth		
Unwanted Emissions at Band Edge		
Conducted Unwanted Emission		
Frequency Stability	Please refer to clause 7	

2.6 Instrument list

RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	PXA Signal Analyzer	Keysight	N9030A	EC1046	2025.4.7
☐	Signal Generator	R&S	SMU200A	EC1050	2025.5.26
☐	Power Meter	R&S	NRX	EC1126	2025.5.13
☒	Climatic Chamber	赛宝	CEEC-WR16H-50W	EC1052	2024.7.31
☒	Humiture meter	托普	TPJ-20	EC1053	2025.1.24
☐	Power Sensor	R&S	NRP-Z11	EC1125	2025.5.13
☐	PXA Signal Analyzer	Keysight	N9030A	EC1124	2024.11.2

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum output power	0.73dB
Occupied Bandwidth	0.88%
Unwanted Emissions at Band Edge	3.03dB
Conducted Unwanted Emission	3.03dB
Frequency stability	0.77×10^{-7}

TEST REPORT

3 Maximum Output Power and Peak to Average Power Ratio and EIRP

Test result: Pass

3.1 Limit

Output Power: Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotopically radiated power (EIRP) with an antenna height up to 300 meters HAAT
Peak to Average Ratio: ≤ 13 dB

3.2 Measurement Procedure

The EUT was configured to transmit on maximum power and proper modulation. The transmitter power shall be measured in terms of a root-mean-square (RMS) average value. In case of the EUT was configured to MIMO mode, since the EUT transmits on all antennas simultaneously in the same frequency range, using the Measure-and-Sum approach, the output power at all antennas were tested, and the total output power were then summed mathematically in linear power units according to FCC KDB 662911 D01.

A peak to average ratio measurement is performed at the conducted ports of the EUT for single carrier for single RAT mode. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) was used and 0.1% probability value recorded.


3.3 Measurement result

According to the following test results, 22.56dBi is applied as maximum allowed antenna gain to comply with the e.i.r.p. limit.


NR-1C

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	64QAM	25	46.50	33.31	7.76	46.88	33.52	7.39	46.88	33.57	7.49
B	64QAM	25	46.50	33.39	7.73	46.90	33.54	7.41	46.91	33.58	7.43
C	64QAM	25	46.56	33.48	7.67	46.93	33.50	7.41	46.96	33.58	7.48
D	64QAM	25	46.43	33.32	7.69	46.87	33.49	7.40	46.88	33.56	7.42
Total conducted power			52.52	39.40	-	52.92	39.53	-	52.93	39.59	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
Max antenna gain			-	22.75	-	-	22.62	-	-	22.56	-


Channel position B

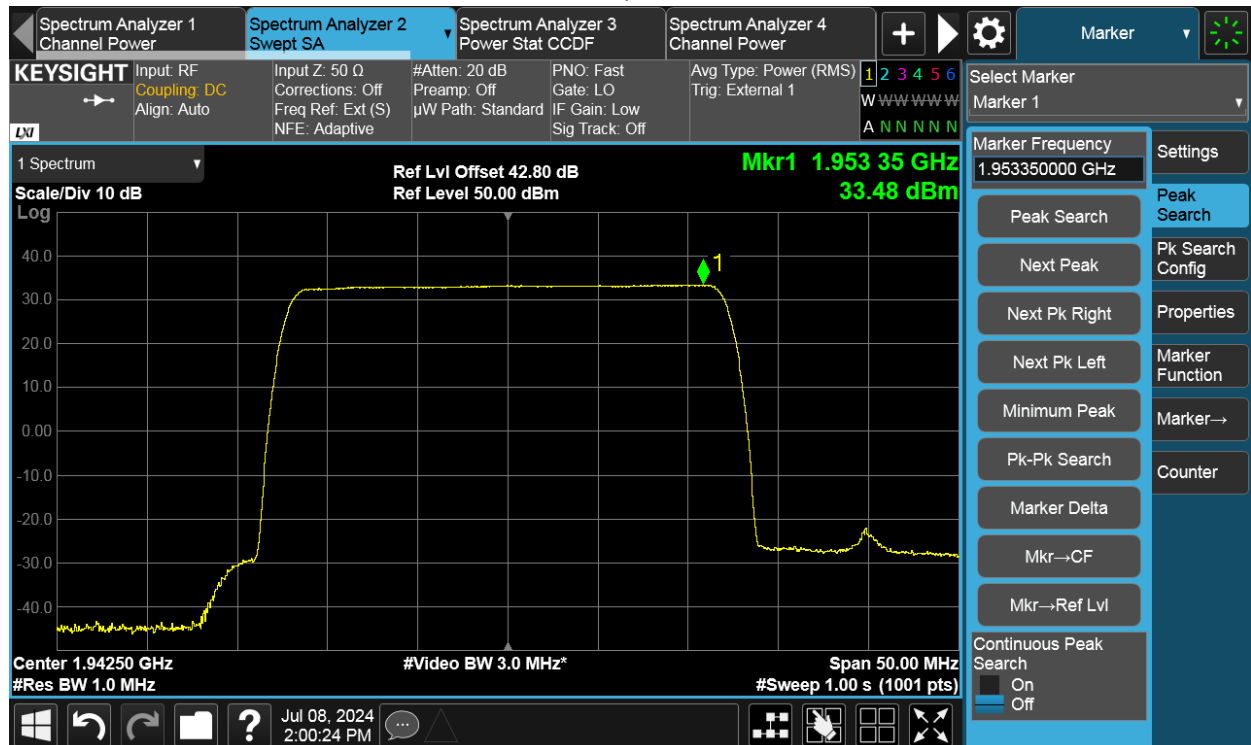


TEST REPORT

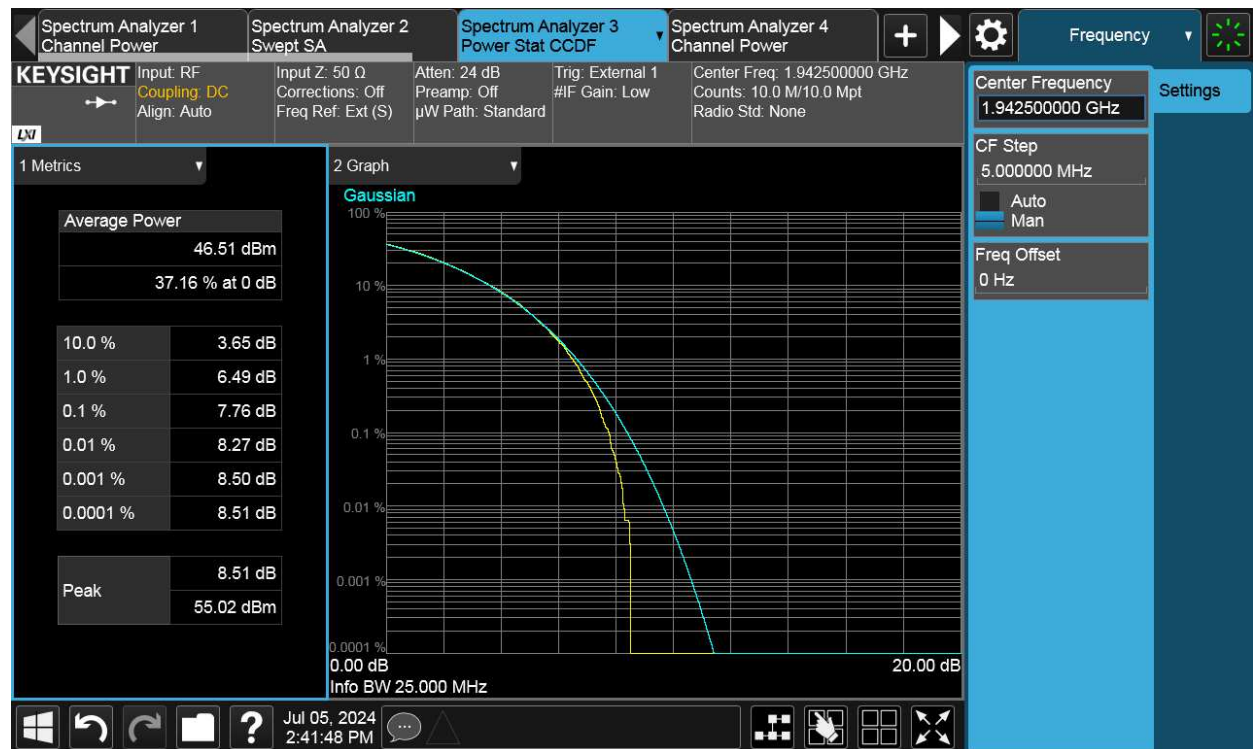


Channel position M

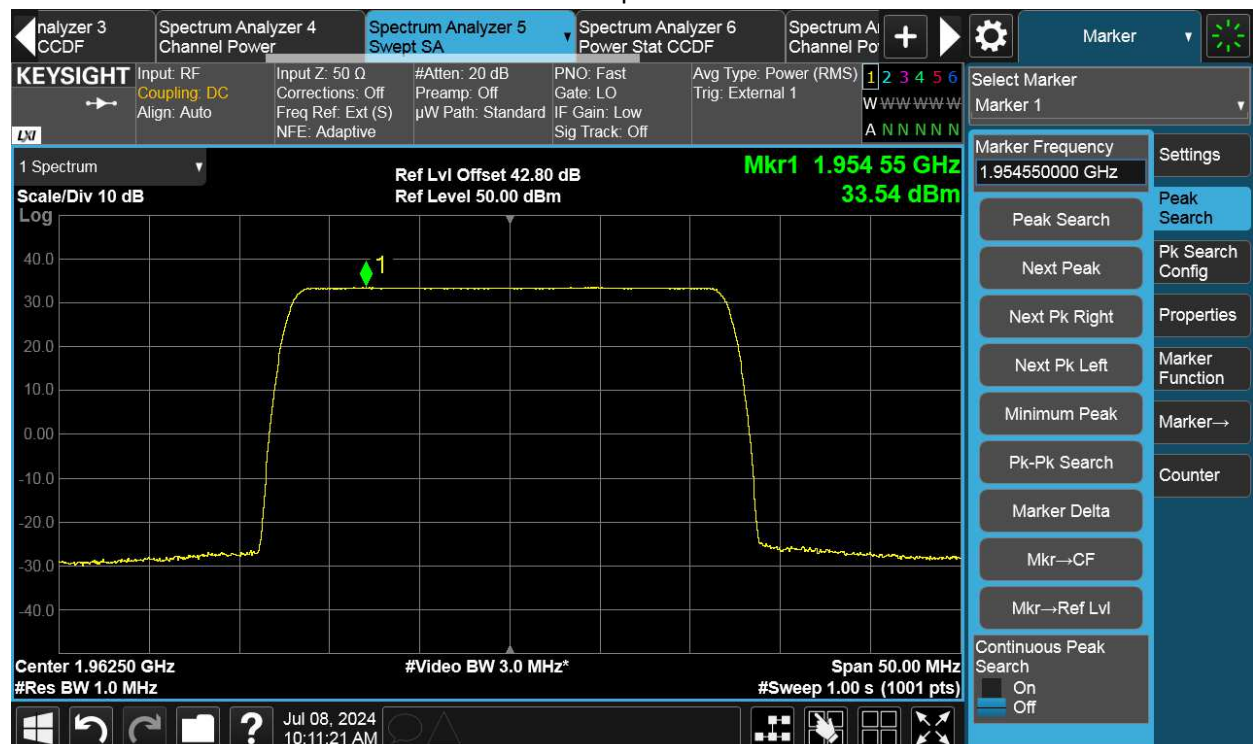


TEST REPORT

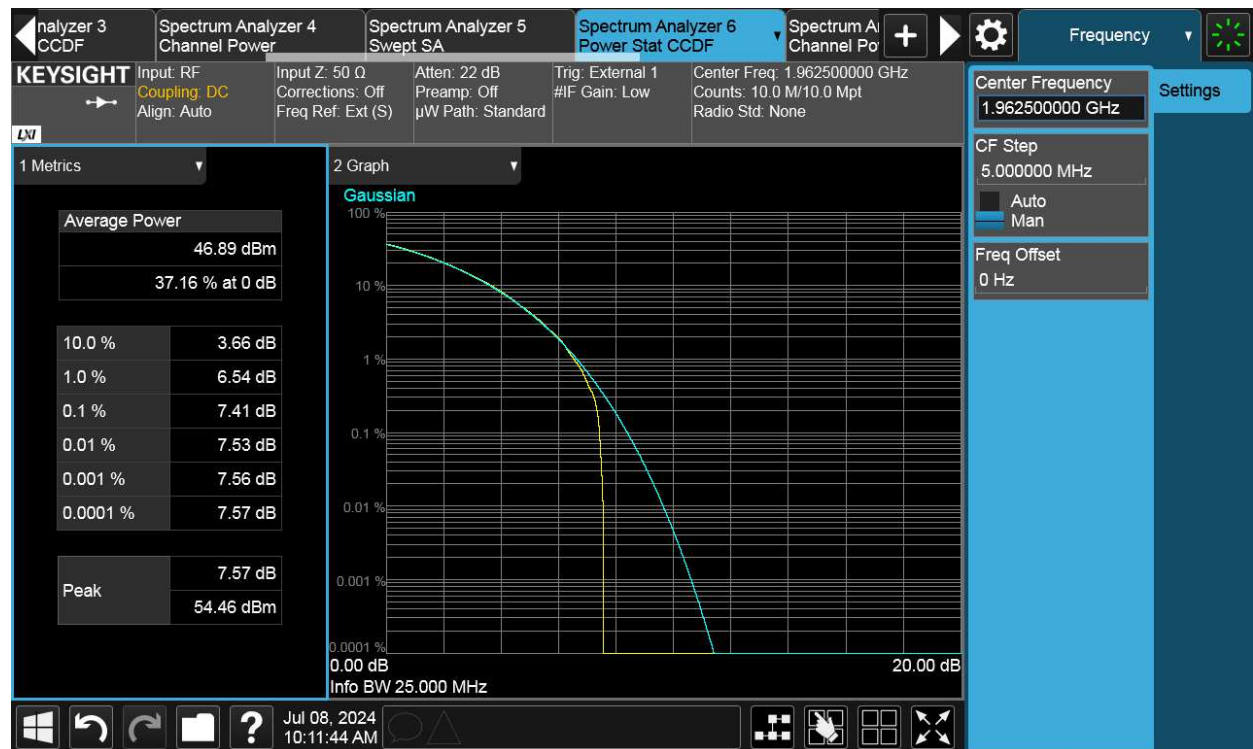

Channel position T


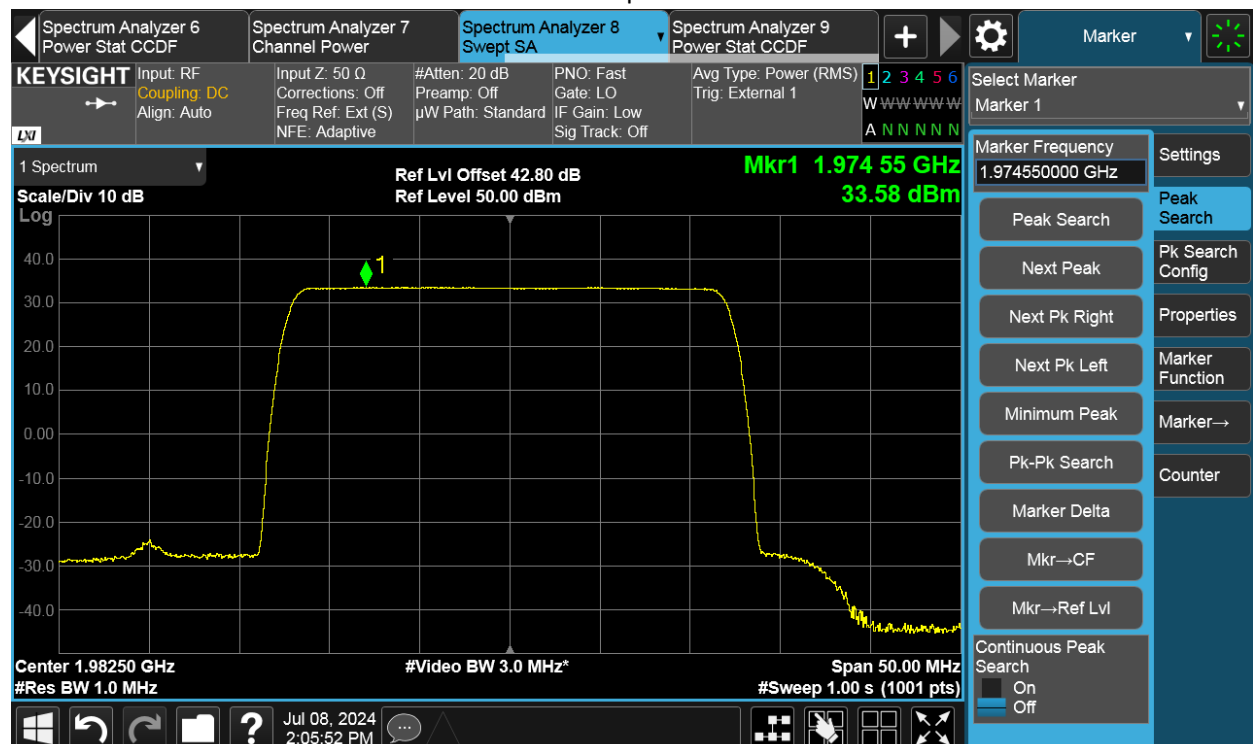


TEST REPORT


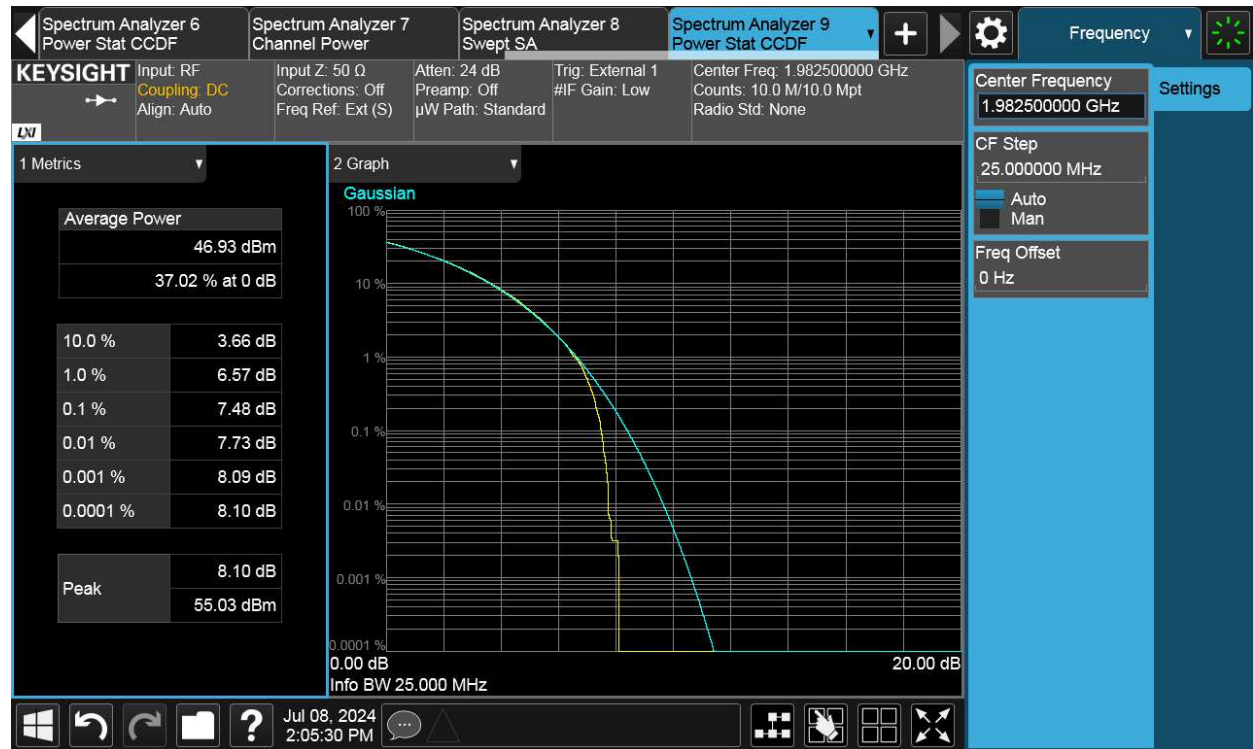


Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	64QAM	30	46.57	32.69	7.69	46.97	32.83	7.37	46.93	32.85	7.50
B	64QAM	30	46.60	32.69	7.70	46.90	32.83	7.41	47.00	32.93	7.41
C	64QAM	30	46.63	32.73	7.72	46.91	32.81	7.38	46.99	32.91	7.42
D	64QAM	30	46.54	32.64	7.71	46.92	32.82	7.37	46.95	32.80	7.50
Total conducted power			52.61	38.71	-	52.95	38.84	-	52.99	38.89	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
Max antenna gain			-	23.44	-	-	23.31	-	-	23.26	-



Channel position B

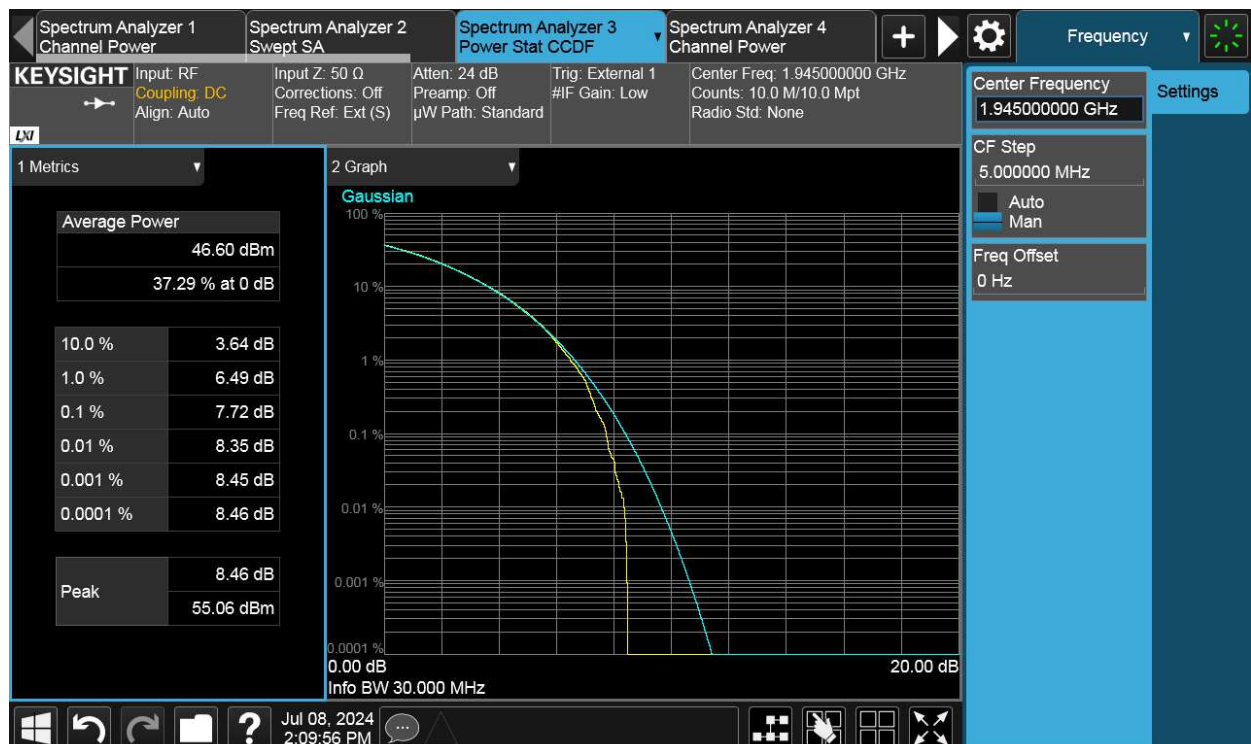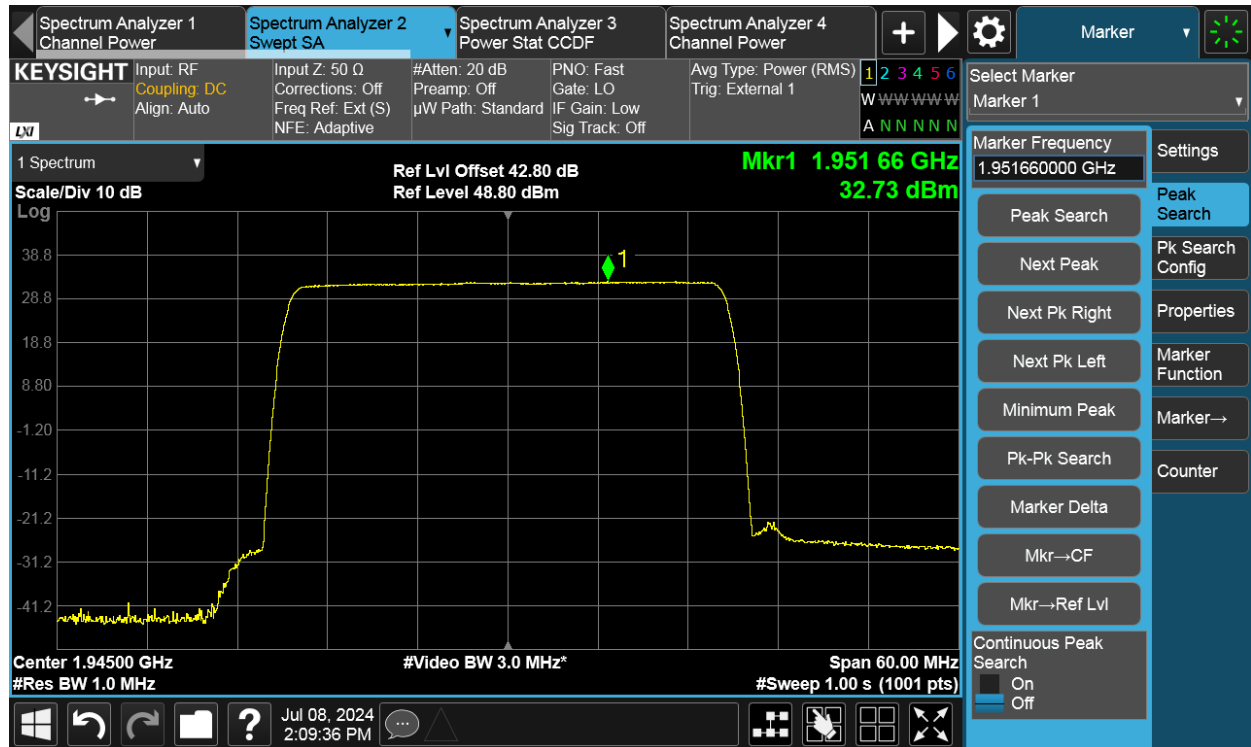

Channel position M

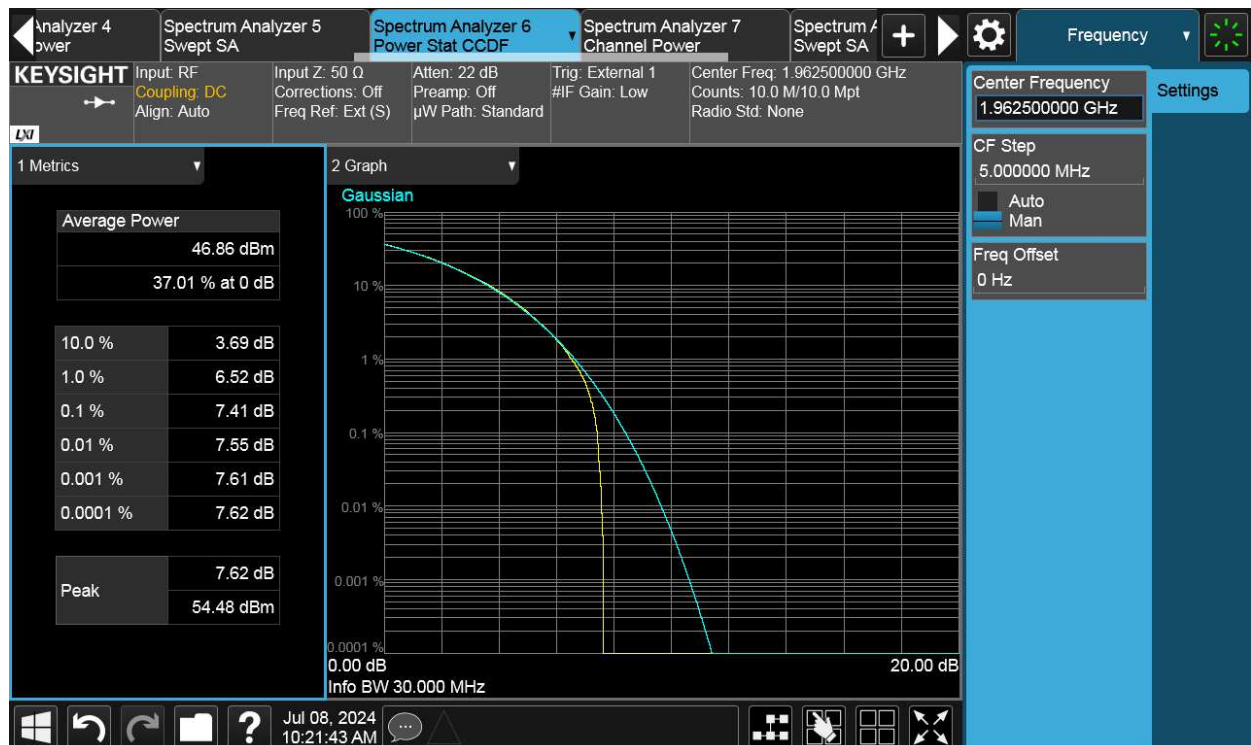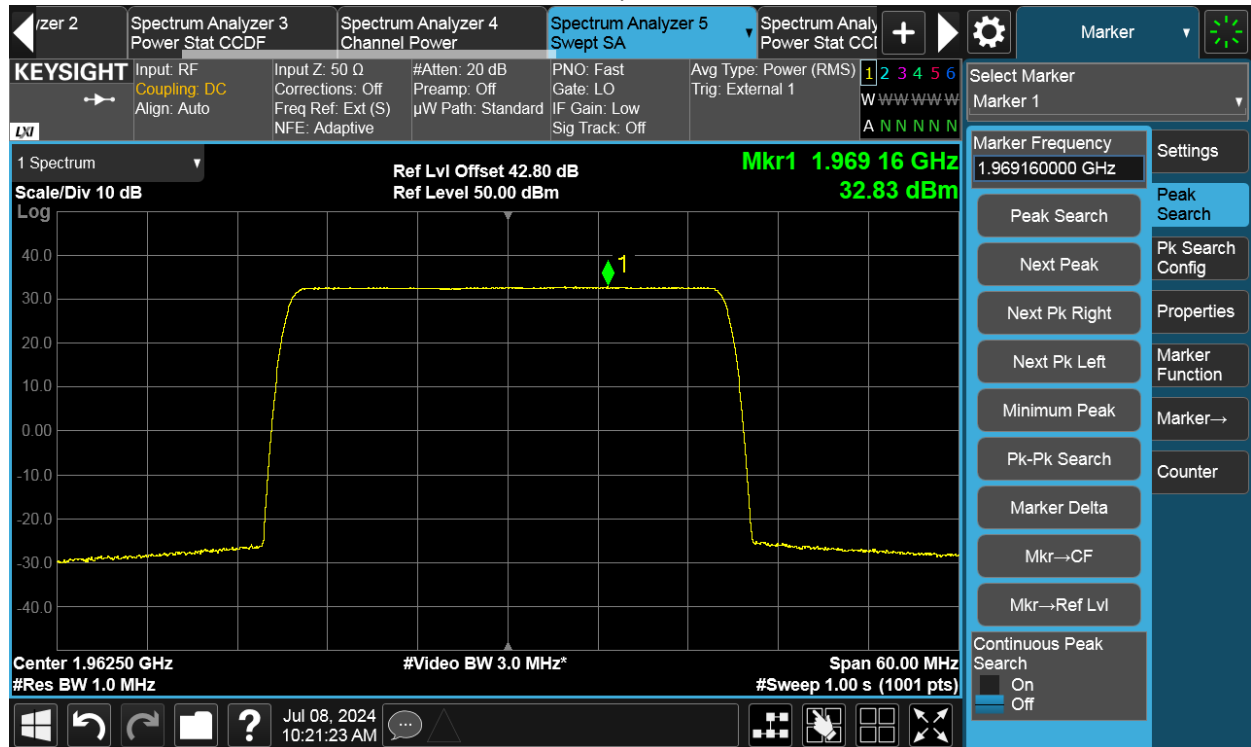


Channel position T

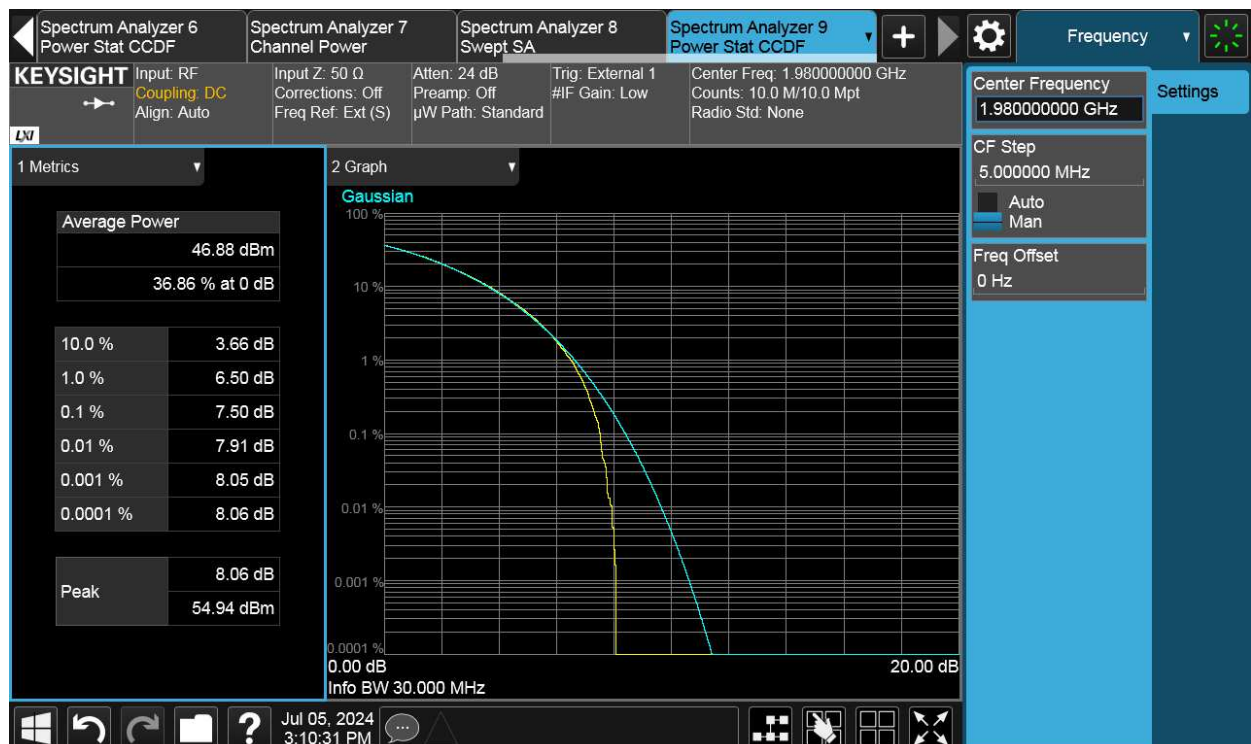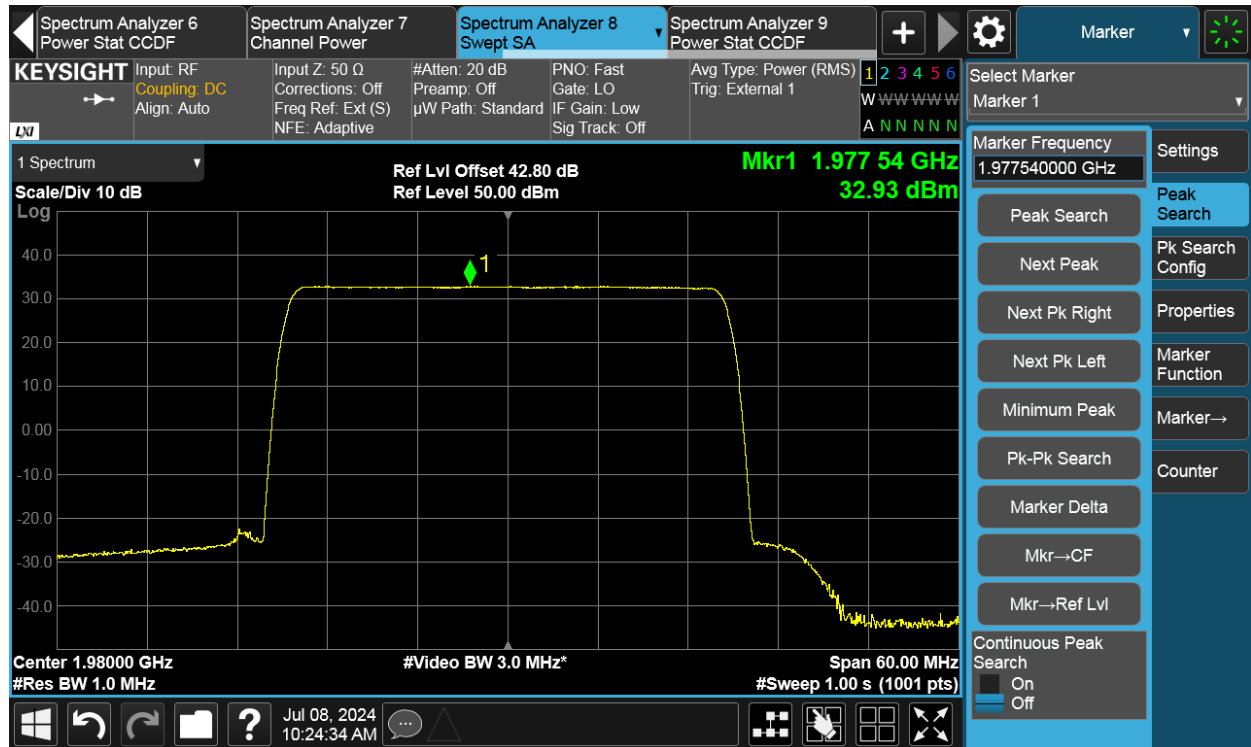


Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	64QAM	35	46.69	31.98	7.77	46.93	32.02	7.45	46.99	32.13	7.52
B	64QAM	35	46.60	31.97	7.82	46.84	32.06	7.46	46.94	32.17	7.49
C	64QAM	35	46.58	31.95	7.76	46.88	31.98	7.41	46.90	32.09	7.47
D	64QAM	35	46.56	31.98	7.76	46.88	31.99	7.44	46.82	32.02	7.51
Total conducted power			52.63	37.99	-	52.90	38.03	-	52.93	38.12	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
Max antenna gain			-	24.16	-	-	24.12	-	-	24.03	-


Channel position B

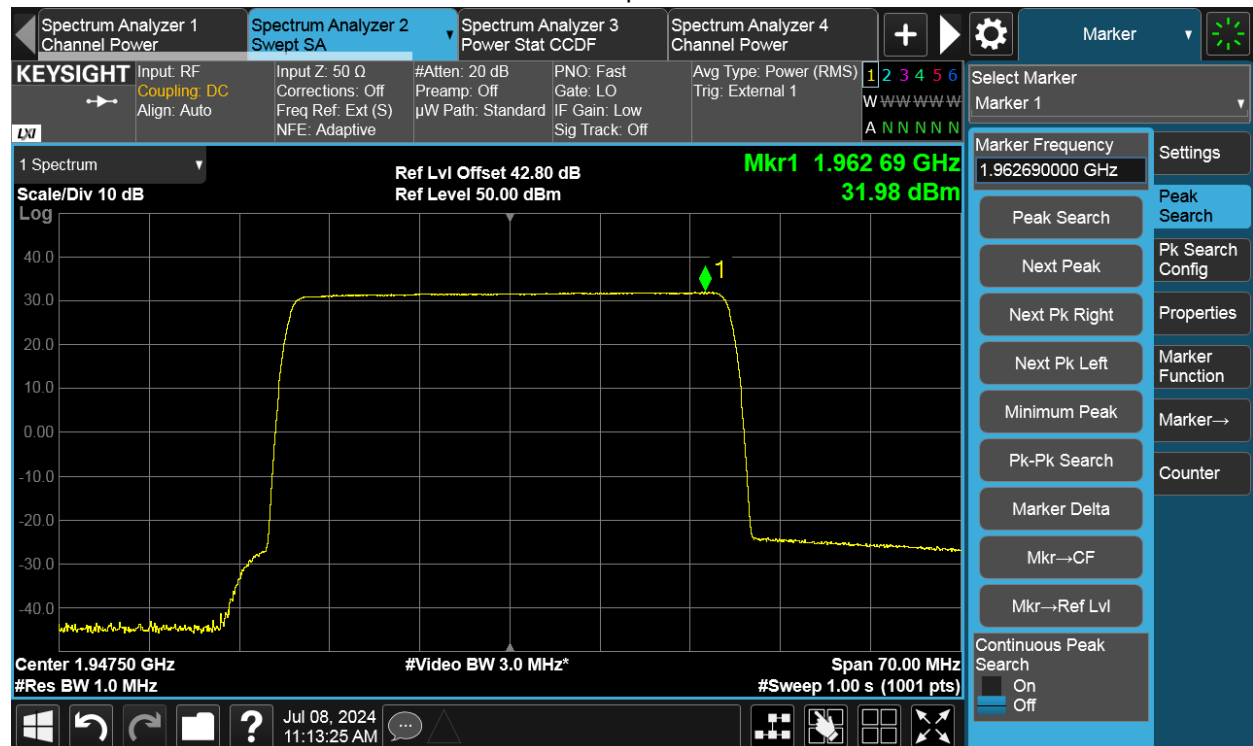


TEST REPORT

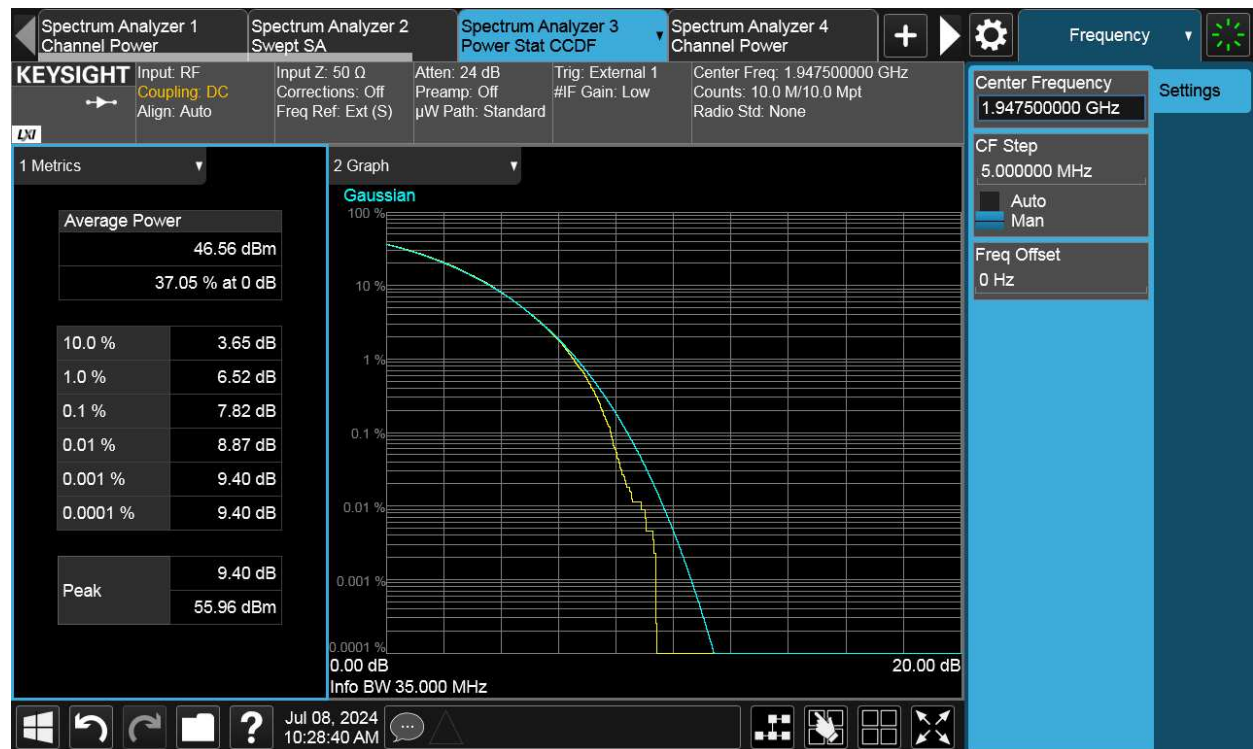


Channel position M

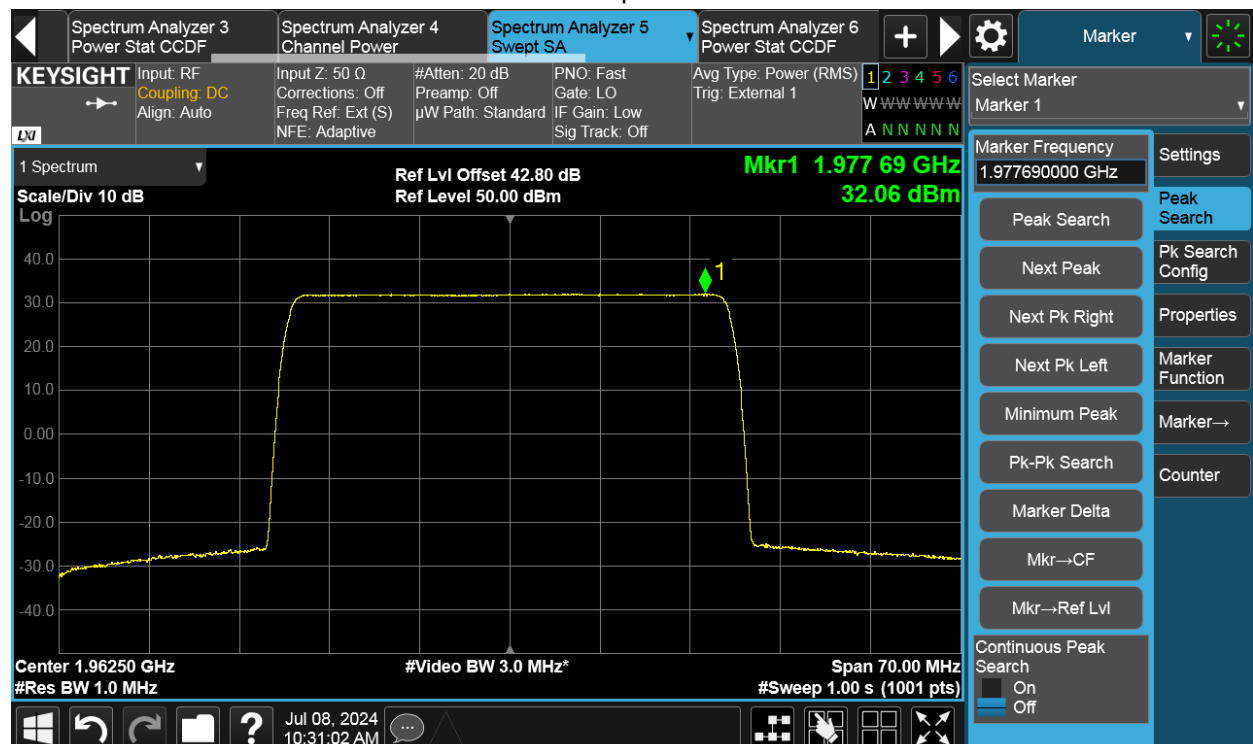


TEST REPORT

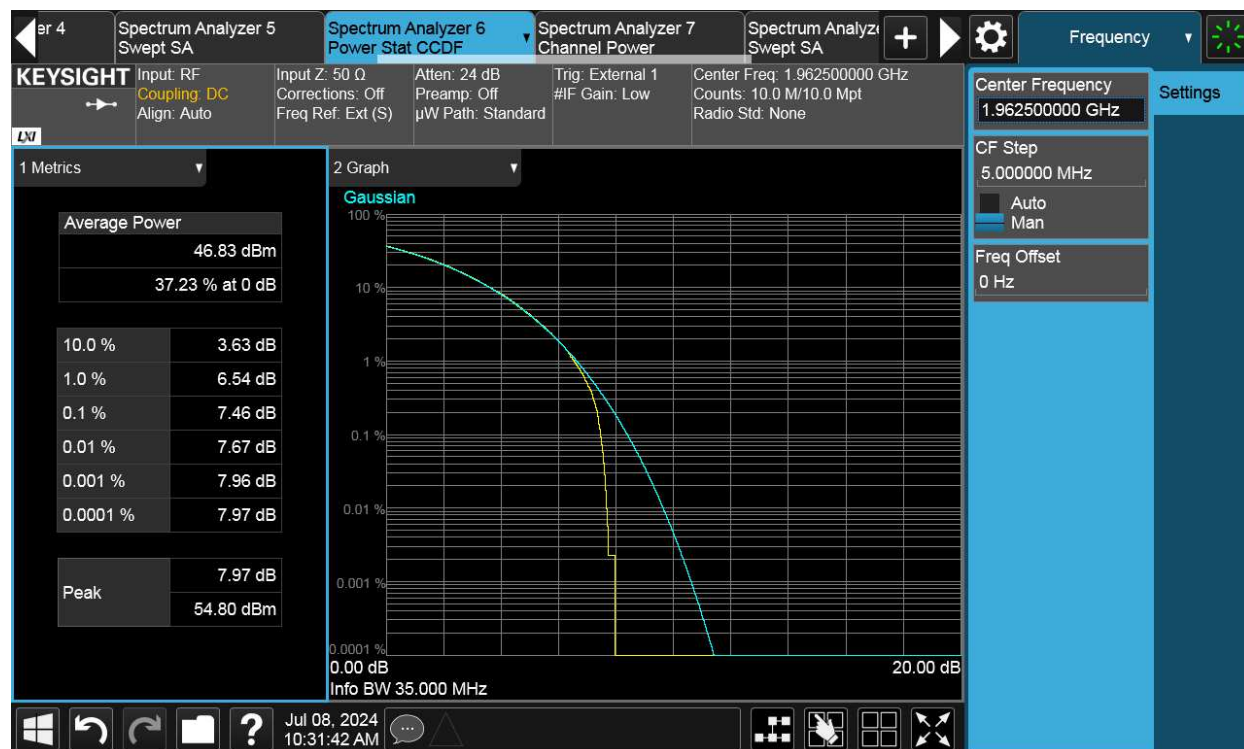

Channel position T


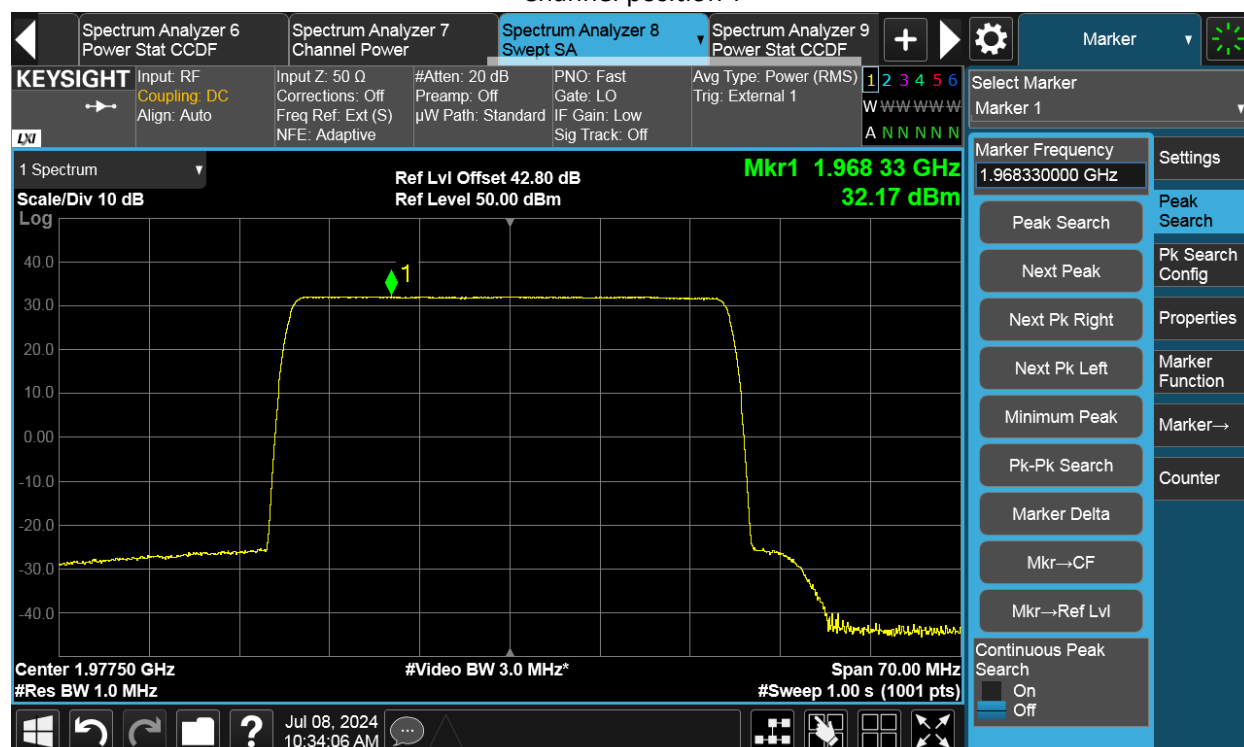


TEST REPORT


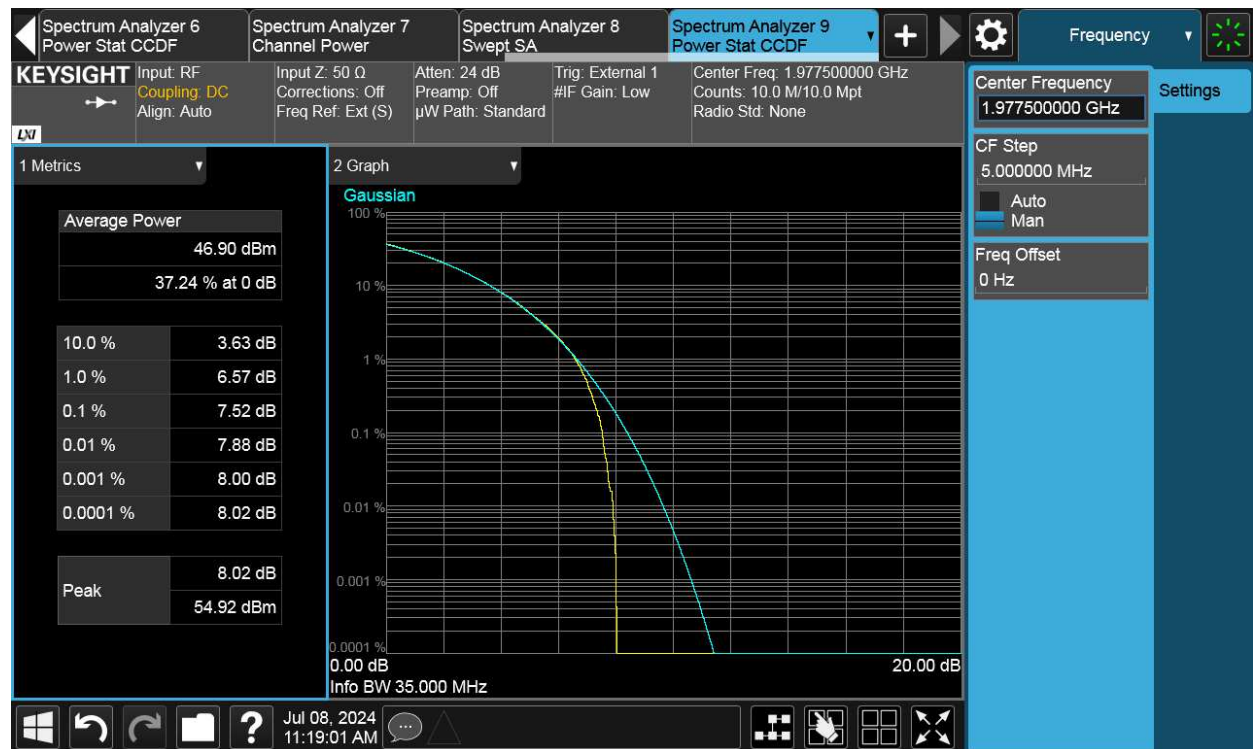


Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	64QAM	40	46.63	31.36	7.79	46.86	31.39	7.44	46.96	31.49	7.52
B	64QAM	40	46.61	31.43	7.84	46.90	31.45	7.45	46.96	31.54	7.48
C	64QAM	40	46.59	31.42	7.83	46.82	31.37	7.43	46.86	31.43	7.52
D	64QAM	40	46.58	31.40	7.76	46.85	31.41	7.44	46.89	31.41	7.51
Total conducted power			52.62	37.42	-	52.88	37.43	-	52.94	37.49	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
Max antenna gain			-	24.73	-	-	24.72	-	-	24.66	-



Channel position B

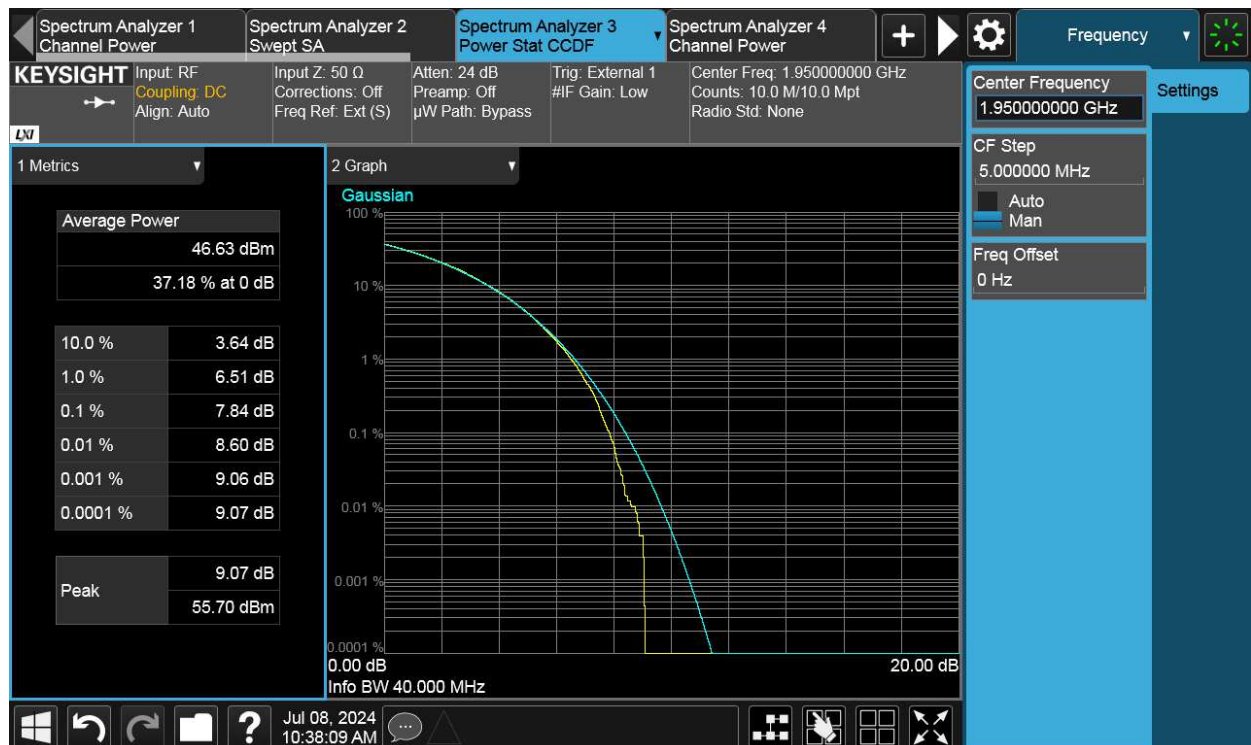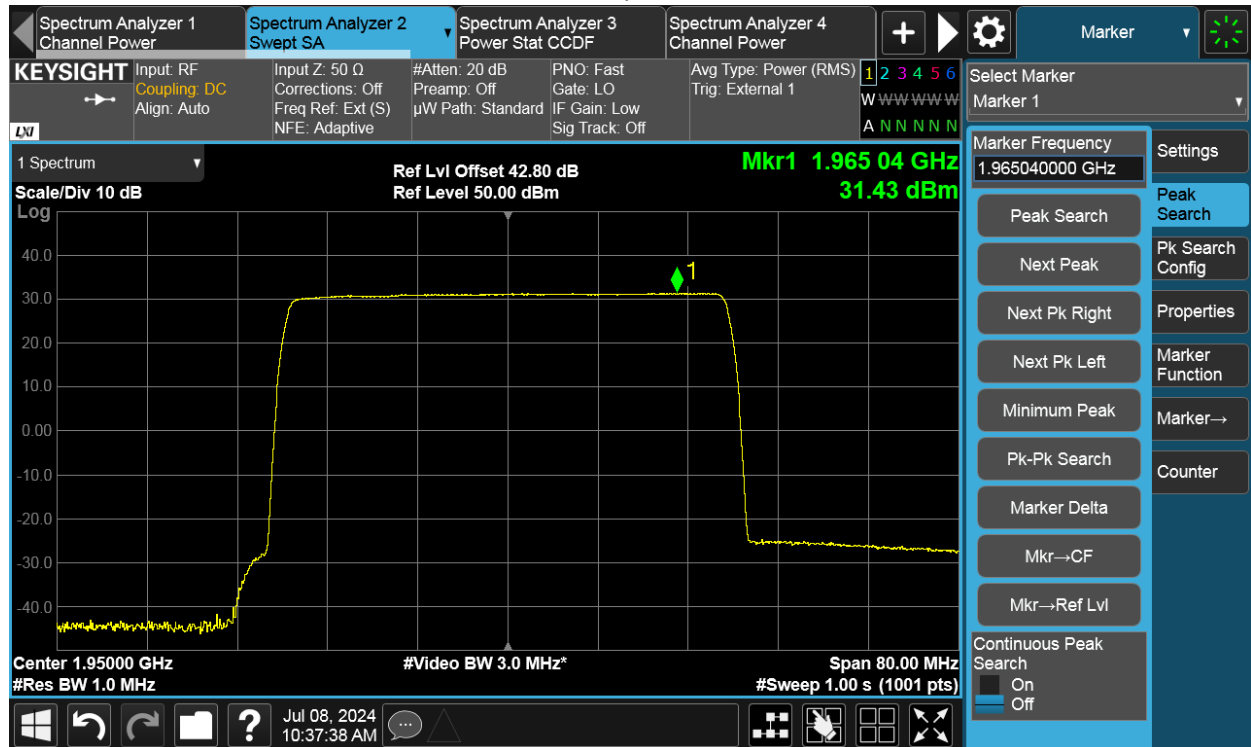

Channel position M

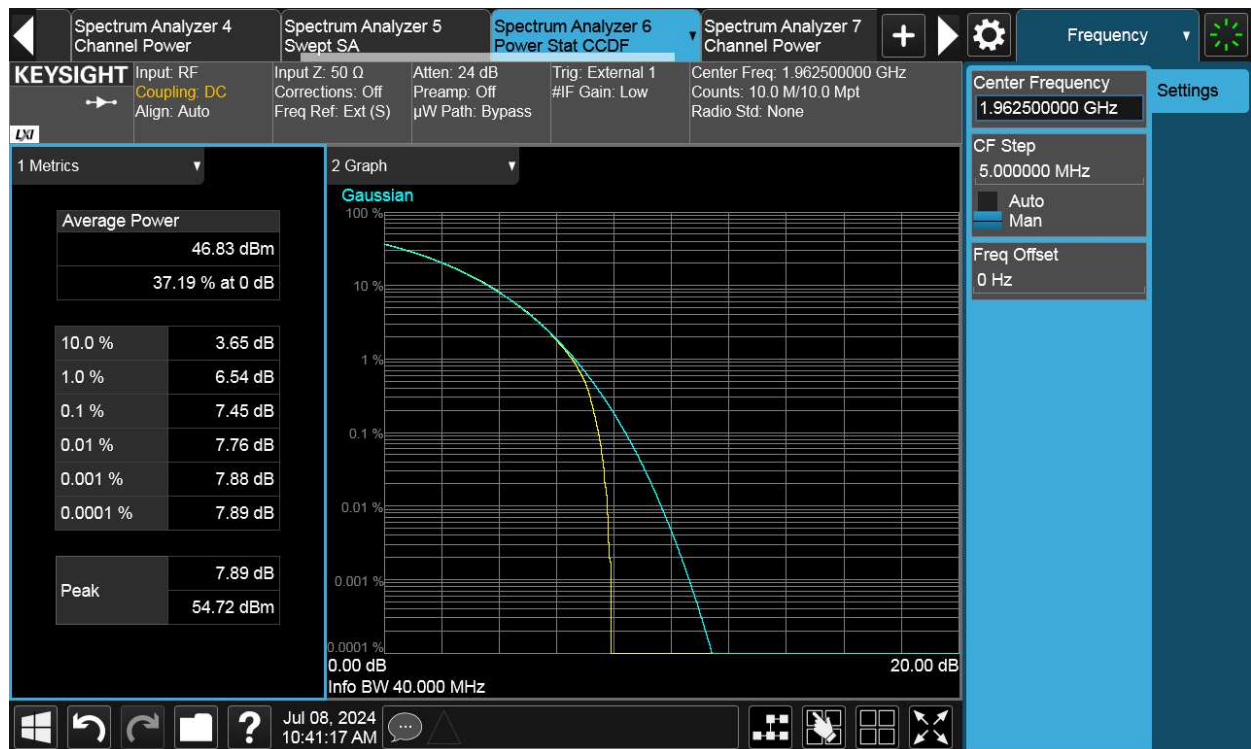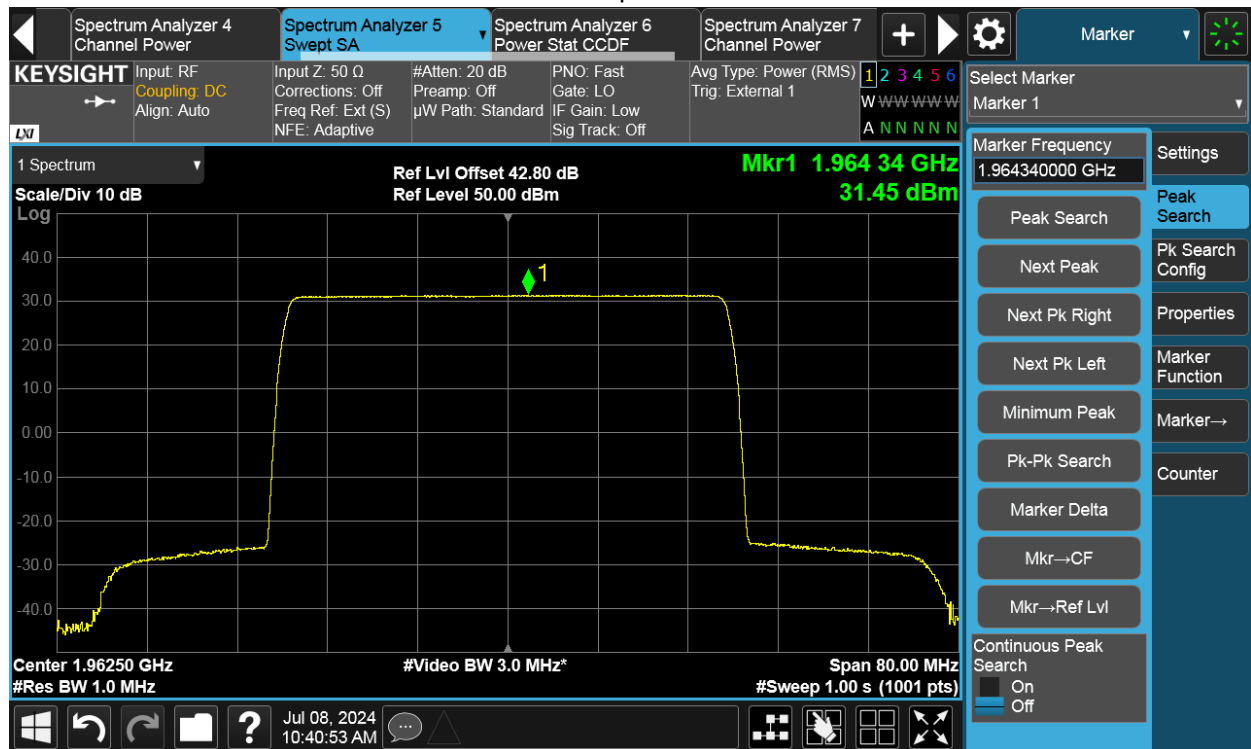

Channel position T

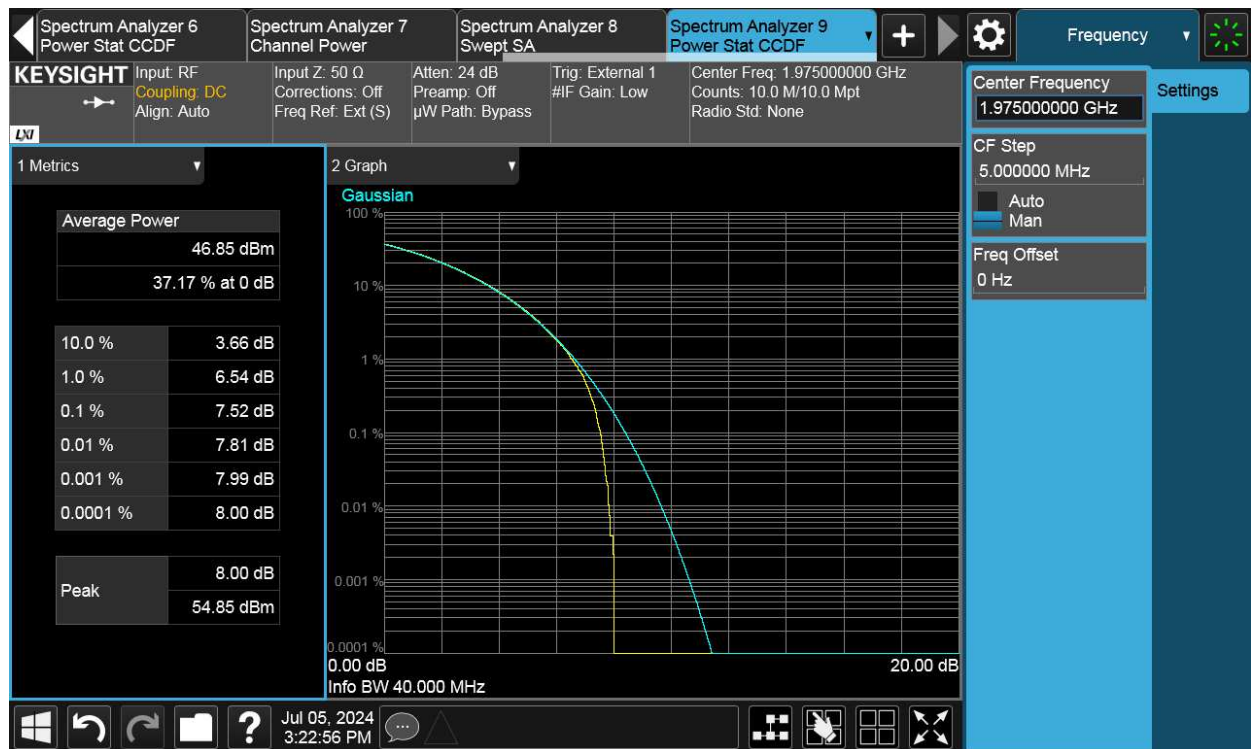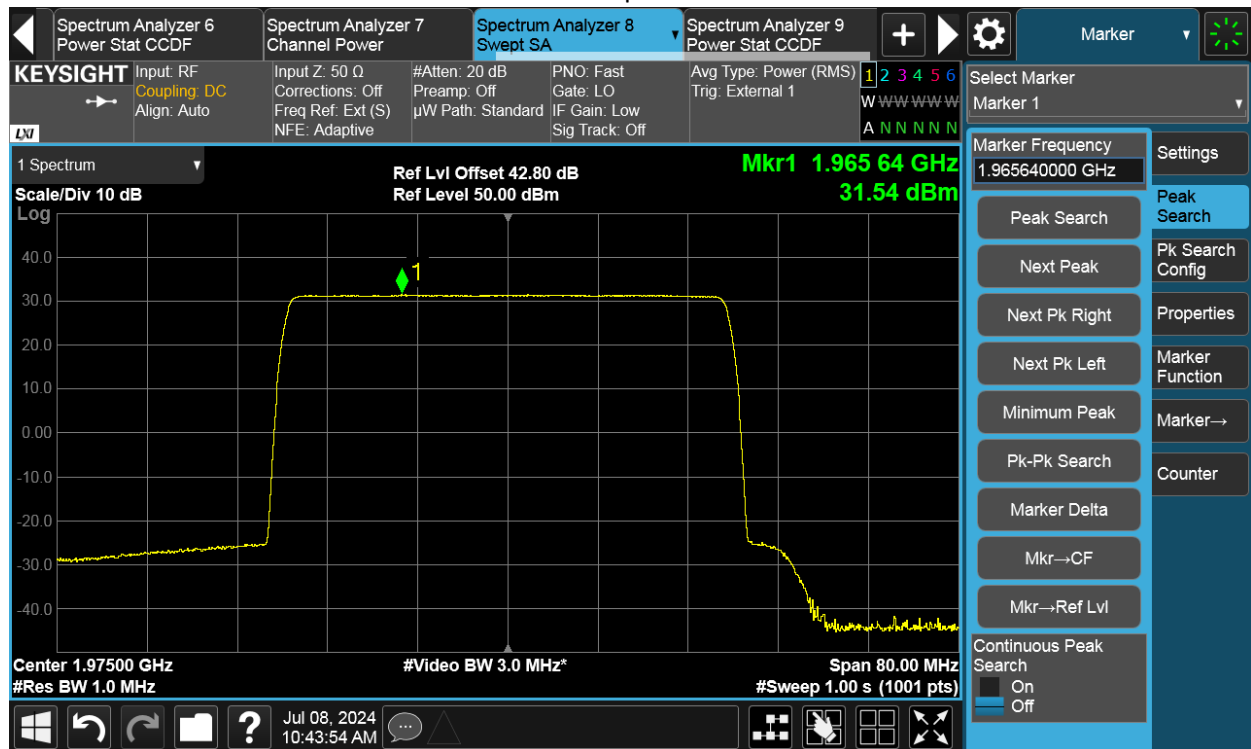

NR-2C

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	64QAM	25	-	-	-	46.71	30.49	-	-	-	-
B	64QAM	25	-	-	-	46.70	30.41	-	-	-	-
C	64QAM	25	-	-	-	46.64	30.45	-	-	-	-
D	64QAM	25	-	-	-	46.64	30.47	-	-	-	-
Total conducted power			-	-	-	52.69	36.48	-	-	-	-
EIRP limit			-	-	-	-	62.15	-	-	-	-
Max antenna gain			-	-	-	-	25.67	-	-	-	-

Channel position M

