

Ericsson AB
Anders Karlsson
BURA DURA RP QRM
Torshamnsgatan 21
164 80 Stockholm

Radio measurements on Radio 4499 44B2/B25 44B66A C equipment with FCC ID TA8AKRC161847 and IC 287AB-AS161847

Product name: Radio 4499 44B2/B25 44B66A C
Product number: KRC 161 847/1

RISE Research Institutes of Sweden AB Vehicles and Automation – EMC-IKT

Performed by

Examined by

Tomas Lennhager

Daniel Lundgren

RISE Research Institutes of Sweden AB

Postal address

Box 857
SE-501 15 BORÅS
Sweden

Office location

Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@ri.se

This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Summary	4
Description of the test object	5
Purpose of test	8
Operation modes during measurements	8
Conducted measurements	8
Radiated measurements	9
Test facility	9
References	9
Measurement equipment	10
Uncertainties	11
Reservation	11
Delivery of test object	11
Manufacturer's representative	11
Test engineers	11
Test participant(-s)	11
Test frequencies used for conducted measurements	12
Test frequencies used for radiated measurements	18
Test setup: conducted measurements	20
Test setup: radiated measurements	21
RF power output measurements according to CFR 47 §24.232 and §27.50/ RSS-133 6.4, RSS-139 5.5 conducted	22
Test set-up and procedure	22
Results LTE	22
Results GSM	28
Results NB IoT SA, LTE with NB IoT GB	30
Limits	32
Occupied bandwidth measurements according to CFR47 §2.1049/ RSS-Gen 4.6.1	33
Test set-up and procedure	33
Results LTE	33
Results GSM	36
Results NB IoT SA/ GB	36
Band edge measurements according to CFR 47 §24.238 and §27.53/ RSS-133 6.5, RSS-139 6.6	55
Test set-up and procedure	55
Results LTE	56
Results GSM	57
Results NB IoT SA/ GB	58
Results GSM+NB IoT+LTE	59
Limits	59

Conducted spurious emission measurements according to CFR 47 §24.238 and §27.53(h) / RSS-133 6.5, RSS-139 6.6.....	137
Test set-up and procedure	137
Results LTE	138
Results GSM	139
Results NB IoT SA/ GB/ IB.....	139
Results GSM+NB IoT SA+LTE	140
Limits	141
Field strength of spurious radiation measurements according to CFR 47 §24.238 and §27.53(h) / RSS-133 6.5, RSS-139 6.6.....	206
Measurement equipment	208
Results	208
Frequency stability measurements according to CFR 47 §24.235 and §27.54 / RSS-133 6.3 and RSS-139 6.4	212
Test set-up and procedure	212
Results LTE Frequency error	212
Results GSM Frequency error.....	213
Remark	214
Limits	214
Photos of test object	215

Summary

Standard Listed part of		Compliant
FCC CFR 47 part 24 and part 27/ RSS-133, RSS-139, RSS-Gen		
2.1046/ 6.4/ 6.5	RF power output	Yes
2.1049/ 4.6.1 Gen	Occupied bandwidth	Yes
2.1051/ 6.5/ 6.6	Band edge	Yes
2.1051/ 6.5/ 6.6	Spurious emission at antenna terminals	Yes
2.1053/ 6.5/ 6.6	Field strength of spurious radiation	Yes
2.1055/ 6.3/ 6.4	Frequency stability	Yes

Description of the test object

Equipment:	Radio equipment Radio 4499 44B2/B25 44B66A C Product number KRC 161 847/1 FCC ID: TA8AKRC161847 IC: 287AB-AS161847
HVIN:	AS161847
FVIN:	-
Hardware revision state:	R1A
Radio Access Technology, Band 2 (B2): RAT and Frequency range:	Single RAT: W, L, NB IoT SA Multi RAT: G+W+NB IoT SA, G+L+NB IoT SA, W+L+NB IoT SA TX: 1930 – 1990 MHz RX: 1850 – 1910 MHz Band 25 (B25): Single RAT: W, L, NB IoT SA Multi RAT: W+L+NB IoT SA TX: 1930 – 1995 MHz RX: 1850 – 1915 MHz Band 66 (B66): Single RAT: W, L, NB IoT SA Multi RAT: W+L+NB IoT SA TX: 2110 – 2180 MHz RX: 1710 – 1780 MHz
IBW:	B2: 60 MHz B25: 65 MHz B66: 70 MHz
Output power:	Maximum output power per carrier: LTE: 1.4 and 3 MHz: 20 W (1.4 MHz and 3 MHz carriers are not supported in B66) 5 MHz: 40 W 10, 15, 20 MHz: 60 W WCDMA: 40 W GSM: 20 W (only available in B2) NB IoT SA: 20 W Maximum total output power/port: 80 W Maximum total output power/band and port: 60 W

Antenna ports B2/B25:	A-D: 4 TX / 4 RX ports
Antenna ports B66:	A-D: 4 TX / 4 RX ports
Antenna:	No dedicated antenna, handled during licensing.
RF configuration:	Single and multi-carrier, 1-12 carriers per port for both bands(6 in each band), Non-Contiguous Spectrum (NCS), Contiguous Spectrum (CS). LTE: Max 6 carriers per Band and port, TX Diversity, 2x2 MIMO, 4x4 MIMO, Carrier Aggregation (CA) intra-band and inter-band supported. WCDMA: Max 6 carriers per band and port, 2x2 MIMO, 4x4 MIMO. GSM: Max 4 carriers per port, Single antenna, dual TX and Quad RX. NB IoT SA: Max 2 carriers per band and port. NB IoT Guard Band (GB): Max 1 Anchor PRB + 1 Non-Anchor PRB (For 10 MHz LTE carriers and wider). NB IoT Inband (IB): Max 1 Anchor PRB + 1 Non-Anchor PRB (For 3 MHz LTE carriers and wider).
Channel bandwidths:	LTE: 1.4 MHz, 3MHz, 5 MHz, 10 MHz 15 MHz and 20 MHz WCDMA: 5 MHz GSM: 200 kHz NB IoT: 200 kHz
Modulations:	LTE: QPSK, 16QAM, 64QAM and 256QAM WCDMA: QPSK, 16QAM and 64QAM GSM: GMSK, AQPSK and 8-PSK NB IoT SA/ GB/ IB: QPSK, BPSK (BPSK is for up link only)

Emission designators:	LTE with and without NB IoT IB:	1.4 MHz BW: 1M10W7D 3 MHz BW: 2M69W7D 5 MHz BW: 4M48W7D 10 MHz BW: 8M97W7D 15 MHz BW: 13M5W7D 20 MHz BW: 17M9W7D 40 MHz BW: 37M8W7D (2x20 MHz, Carrier Aggregation)
	WCDMA:	4M18F9W
	GSM:	GMSK: 245KGXW AQPSK: 241KGXW 8PSK: 245KG7W
	NB IoT SA:	200KW7D
	LTE with NB IoT GB:	10 MHz BW: 9M39W7D 15 MHz BW: 14M0W7D 20 MHz BW: 18M4W7D
RF power Tolerance:	+0.6/ -2.5 dB	
CPRI Speed	Up to 10.1 Gbit/s	
Nominal supply voltage:	-48VDC	

The information above is supplied by the manufacturer.

Tested configuration:	Single RAT: LTE, Multi RAT: LTE+ GSM+ NB IoT SA/ GB/ IB
-----------------------	--

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47 part 24 and Part 27, ISSED RSS-133, RSS-139 and RSS-Gen.

Operation modes during measurements

LTE measurements were performed with the test object transmitting test models as defined in 3GPP TS 36.141. Test model E-TM1.1 was used to represent QPSK, test model E-TM3.2 to represent 16QAM, test model E-TM3.1 to represent 64QAM modulation and E-TM3.1A to represent 256QAM modulation. E-TM1.1 represents worst case.

GSM

Measurements were performed with the test object transmitting following modulations: GMSK, AQPSK and 8-PSK.

NB IoT SA/ GB/ IB

NB IoT SA/ GB/ IB measurements were performed with the test object transmitting test model N-TM representing QPSK as defined in 3GPP TS 36.141.

B2 and B25 overlap each other. They both have the same lower edge but the upper edge for B25 is 5 MHz higher. For measurements on middle configuration, the middle frequency for B25 was deemed representative for both bands. For band edge measurements on the top frequency configuration the measurements were repeated for the upper edge of both B2 and B25.

For all measurements the radio was configured with the total output power of 80 watts per port. For measurements noted with B25 max power configuration the Carrier(s) were configured with the maximum possible output power for the Carrier(s) in that band. The carrier in B66 was a 10 MHz LTE carrier on 2145 MHz configured with the necessary output power to reach the maximum total power per port of 80 watts.

For measurements noted with B66 max power configuration, the Carrier(s) were configured with the maximum possible output power for the Carrier(s) in that band. The carrier in Band 2/25 was a 10 MHz LTE carrier on 1962.5 MHz configured with the necessary output power to reach the maximum power per port of 80 watts.

Conducted measurements

The test object was supplied with -48 VDC by an external power supply. Additional connections are documented in the set-up drawings for conducted measurements.

Radiated measurements

The test object was powered with -48 VDC by an external power supply. Additional connections are documented in the set-up drawings for radiated measurements.

Test facility

The used semi-anechoic chamber is compliant with ANSI C63.4. RISE is an ISO 17025 accredited test facility for Electromagnetic Compatibility (EMC) and Radio testing. RISE is a Recognized Lab under FCC and ISED (registration No. 3482A) rules for the scope of standards used in this test report.

References

Measurements were done according to relevant parts of the following standards:

ANSI C63.4-2014
CFR 47 part 2, March 2020
CFR 47 part 24, March 2020
CFR 47 part 27, March 2020
ANSI C63.26-2015
KDB 971168 D03 IM Emission Repeater Amp v01
3GPP TS 36.141, 15.3.0
RSS-Gen Issue 5 Amendment 1
RSS-133 Issue 6 Amendment 1
RSS-139 Issue 3

Measurement equipment

	Calibration Due	RISE number
Test site Tesla	2022-12	503 881
Test site Marconi	-	15:121
R&S ESU 40	2021-01	901 385
R&S FSQ 40	2020-07	504 143
R&S FSW 43	2020-09	902 073
Control computer with R&S software EMC32 version 10.20.01	-	BX62351
Directional coupler	2021-02	901 496
RF attenuator	2021-02	902 282
High pass filter 3-27 GHz	2021-02	901 502
High pass filter 3-27 GHz	2021-02	BX40074
Coaxial cable Megaphase	2021-02	BX50191
Coaxial cable Sucoflex 102EA	2021-02	BX50236
Coaxial cable Sucoflex 102EA	2021-02	BX50237
Coaxial cable, Tesla emission	2020-06	BX91490
Coaxial cable	2020-09	503 508
Coaxial cable	2020-09	503 509
Teseq BiConiLog Antenna CBL6143A	2022-09	BX92331
EMCO Horn Antenna 3115	2021-07	502 175
Flann Standard Gain Horn 20240-20	-	BX92412
Miteq, Low Noise Amplifier	2021-01	503 278
µComp Nordic, Low Noise Amplifier	2021-01	901 545
Temperature and humidity meter, Testo 635	2020-06	504 203
Temperature and humidity meter, Testo 625	2020-06	504 188

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered: 2020-02-10.

Manufacturer's representative

Mikael Jansson, Ericsson AB.

Test engineers

Tomas Isbring and Andreas Björnqvist for radiated tests, RISE
Tomas Lennhager and Karl Flysjö for conducted tests, RISE.

Test participant(-s)

None.

Test frequencies used for conducted measurements

B25 LTE:

Frequency [MHz]	Symbolic name	Comment
1930.7	B _{1.4}	TX bottom frequency in 1.4 MHz BW configuration, 43 dBm output power.
1931.5	B ₃	TX bottom frequency in 3 MHz BW configuration, 43 dBm output power.
1932.5	B ₅	TX bottom frequency in 5 MHz BW configuration, 46 dBm output power.
1935.0	B ₁₀	TX bottom frequency in 10 MHz BW configuration, 47.8 dBm output power.
1937.5	B ₁₅	TX bottom frequency in 15 MHz BW configuration, 47.8 dBm output power.
1940.0	B ₂₀	TX bottom frequency in 20 MHz BW configuration, 47.8 dBm output power.
1962.5	M _{1.4}	TX middle frequency in 1.4 MHz BW configuration, 43 dBm output power.
1962.5	M ₃	TX middle frequency in 3 MHz BW configuration, 43 dBm output power.
1962.5	M ₅	TX middle frequency in 5 MHz BW configuration, 46 dBm output power.
1962.5	M ₁₀	TX middle frequency in 10 MHz BW configuration, 47.8 dBm output power.
1962.5	M ₁₅	TX middle frequency in 15 MHz BW configuration, 47.8 dBm output power.
1962.5	M ₂₀	TX middle frequency in 20 MHz BW configuration, 47.8 dBm output power.
1994.3	T _{1.4}	TX top frequency in 1.4 MHz BW configuration, 43 dBm output power.
1993.5	T ₃	TX top frequency in 3 MHz BW configuration, 43 dBm output power.
1992.5	T ₅	TX top frequency in 5 MHz BW configuration, 46 dBm output power.
1990.0	T ₁₀	TX top frequency in 10 MHz BW configuration, 47.8 dBm output power.
1987.5	T ₁₅	TX top frequency in 15 MHz BW configuration, 47.8 dBm output power.
1985.0	T ₂₀	TX top frequency in 20 MHz BW configuration, 47.8 dBm output power.
1935.0 1945.0 1955.0 1965.0 1975.0 1985.0	M ₆₁₀	TX max carrier constellation in 10 MHz BW configuration, 40 dBm output power per carrier (47.8 dBm total output power).
1931.5 1934.5 1948.5	B _{im3}	TX constellation for Bim with 3 MHz BW configuration for Bim, 43 dBm output power per carrier (47.8 dBm total output power).
1976.5 1990.5 1993.5	T _{im3}	TX constellation for Tim with 3 MHz BW configuration for Tim, 43 dBm output power per carrier (47.8 dBm total output power).
1940.0 1960.0	CA _{B20-20}	Carrier Aggregation TX bottom 20 MHz + 20 MHz configuration, 44.8 dBm output power per carrier (47.8 dBm total output power).
1952.5 1972.5	CA _{M20-20}	Carrier Aggregation TX middle 20 MHz + 20 MHz configuration, 44.8 dBm output power per carrier (47.8 dBm total output power).

All RX frequencies were configured 80MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

B2 LTE:

Frequency [MHz]	Symbolic name	Comment
1989.3	T _{1.4}	TX top frequency in 1.4 MHz BW configuration, 43 dBm output power.
1988.5	T ₃	TX top frequency in 3 MHz BW configuration, 43 dBm output power.
1987.5	T ₅	TX top frequency in 5 MHz BW configuration, 46 dBm output power.
1985.0	T ₁₀	TX top frequency in 10 MHz BW configuration, 47.8 dBm output power.
1982.5	T ₁₅	TX top frequency in 15 MHz BW configuration, 47.8 dBm output power.
1980.0	T ₂₀	TX top frequency in 20 MHz BW configuration, 47.8 dBm output power.

All RX frequencies were configured 80MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

B66 LTE:

Frequency [MHz]	Symbolic name	Comment
2112.5	B ₅	TX bottom frequency in 5 MHz BW configuration, 46 dBm output power.
2115.0	B ₁₀	TX bottom frequency in 10 MHz BW configuration, 47.8 dBm output power.
2117.5	B ₁₅	TX bottom frequency in 15 MHz BW configuration, 47.8 dBm output power.
2120.0	B ₂₀	TX bottom frequency in 20 MHz BW configuration, 47.8 dBm output power.
2145.0	M ₅	TX middle frequency in 5 MHz BW configuration, 46 dBm output power.
2145.0	M ₁₀	TX middle frequency in 10 MHz BW configuration, 47.8 dBm output power.
2145.0	M ₁₅	TX middle frequency in 15 MHz BW configuration, 47.8 dBm output power.
2145.0	M ₂₀	TX middle frequency in 20 MHz BW configuration, 47.8 dBm output power.
2177.5	T ₅	TX top frequency in 5 MHz BW configuration, 46 dBm output power.
2175.0	T ₁₀	TX top frequency in 10 MHz BW configuration, 47.8 dBm output power.
2172.5	T ₁₅	TX top frequency in 15 MHz BW configuration, 47.8 dBm output power.
2170.0	T ₂₀	TX top frequency in 20 MHz BW configuration, 47.8 dBm output power.
2112.5 2117.5 2177.5	Bim ₅	TX constellation for Bim with 5 MHz BW configuration for Bim, 43 dBm output power per carrier (47.8 dBm total output power).
2112.5 2172.5 2177.5	Tim ₅	TX constellation for Tim with 5 MHz BW configuration for Tim, 43 dBm output power per carrier (47.8 dBm total output power).
2120.0 2130.0 2140.0 2150.0 2160.0 2170.0	M6 ₁₀	TX max carrier constellation in 10 MHz BW configuration, 40 dBm output power per carrier (47.8 dBm total output power).
2135.0 2155.0	CA _{M20+20}	Carrier Aggregation TX middle 20 MHz + 20 MHz configuration, 44.8 dBm output power per carrier (47.8 dBm total output power).

All RX frequencies were configured 400MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

B2 GSM+LTE:

Frequency [MHz]	Symbolic name	Comment
G=1930.4 L=1945.0	B _{G+L}	TX bottom Frequency for GSM. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the GSM carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
G=1960.0 L=1945.0	M _{G+L}	TX middle Frequency for GSM. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the GSM carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
G ₁ =1958.2 G ₂ =1958.8 G ₃ =1959.4 G ₄ =1960.0 L=1945.0	M4 _{G+L}	TX middle Frequencies with four GSM carriers and a LTE carrier with 10 MHz carrier bandwidth. 40.8 dBm output power per carrier (47.8 dBm total output power).
G=1989.6 L=1975.0	T _{G+L}	TX top Frequency for GSM. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the GSM carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
G ₁ =1930.4 G ₂ =1931.0 L=1949.3	Bim _{G+L}	TX constellation for Bim with a 1.4 MHz BW LTE carrier configuration and two GSM carriers, 43 dBm output power per carrier (47.8 dBm total output power).
G ₁ =1989.0 G ₂ =1989.6 L=1970.7	Tim _{G+L}	TX constellation for Tim with a 1.4 MHz BW LTE carrier configuration and two GSM carriers, 43 dBm output power per carrier (47.8 dBm total output power).

All RX frequencies were configured 80MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

B2 GSM+NB IoT SA+LTE:

Frequency [MHz]	Symbolic name	Comment
G=1930.4 IoT=1931.0 L=1987.5	Bim _{G+IoT+L}	TX constellation for Bim with a LTE carrier with 5 MHz carrier bandwidth, a NB IoT SA carrier and a GSM carrier. 43 dBm output power per carrier (47.8 dBm total output power).
L=1932.5 IoT=1989.0 G=1989.6	Tim _{G+IoT+L}	TX constellation for Tim with a LTE carrier with 5 MHz carrier bandwidth, a NB IoT SA carrier and a GSM carrier. 43 dBm output power per carrier (47.8 dBm total output power).
L ₁ =1932.5 G ₁ =1950.2 IoT ₁ =1950.8 G ₂ =1969.2 IoT ₂ =1969.8 L ₂ =1987.5	Max _{G+IoT+L}	TX constellation with two LTE 5 MHz bandwidth carriers, two GSM carriers and two NB IoT SA carriers. 40 dBm output power per carrier (47.8 dBm total output power).

All RX frequencies were configured 80MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

B25 NB IoT SA/ GB/ IB+LTE

Frequency [MHz]	Symbolic name	Comment
IoT=1930.2 L=1945.0	B _{IoT+L}	TX bottom Frequency for Standalone IoT. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the IoT carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
IoT=PRB0 L=1935.0	B _{IBIoT+L}	TX bottom Frequency for IoT IB. LTE carrier with 10 MHz carrier bandwidth. NB IoT IB was boosted with 6 db. Total output power 47.8 dBm
IoT=1962.5 L=1947.5	M _{IoT+L}	TX middle Frequency for Standalone IoT. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the IoT carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
IoT=PRB0 L=1962.5	M _{IBIoT+L}	TX middle Frequency for IoT IB. LTE carrier with 10 MHz carrier bandwidth. NB IoT IB was boosted with 6 db. Total output power 47.8 dBm
IoT=1994.8 L=1977.5	T _{IoT+L}	TX top Frequency for Standalone IoT. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the IoT carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
IoT=PRB49 L=1990.0	T _{IBIoT+L}	TX top Frequency for IoT IB. LTE carrier with 10 MHz carrier bandwidth. NB IoT IB was boosted with 6 db. Total output power 47.8 dBm
IoT ₁ =PRB-1 IoT ₂ =PRB50 L=1935.0	B _{10Guard}	TX constellation for Bottom IoT GB. LTE carrier with 10 MHz carrier bandwidth. IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB50 L=1990.0	T _{10Guard}	TX constellation for Top IoT GB. LTE carrier with 10 MHz carrier bandwidth. IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB75 L=1937.5	B _{15Guard}	TX constellation for bottom IoT GB. LTE carrier with 15 MHz carrier bandwidth. NB IoT GB was boosted with 6 dB Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB75 L=1987.5	T _{15Guard}	TX constellation for Top IoT GB. LTE carrier with 15 MHz carrier bandwidth. NB IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB100 L=1940.0	B _{20Guard}	TX constellation for bottom IoT GB. LTE carrier with 20 MHz carrier bandwidth. NB IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB100 L=1985.0	T _{20Guard}	TX constellation for Top IoT GB. LTE carrier with 20 MHz carrier bandwidth. NB IoT GB was boosted with 6 dB. Total output power 47.8 dBm.

All RX frequencies were configured 80MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

B66 NB IoT SA/ GB/ IB+LTE

Frequency [MHz]	Symbolic name	Comment
IoT=2110.2 L=2135.0	B _{IoT+L}	TX bottom Frequency for Standalone IoT. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the IoT carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
IoT=PRB0 L=2115.0	B _{IBIoT+L}	TX bottom Frequency for IoT IB. LTE carrier with 10 MHz carrier bandwidth. NB IoT IB was boosted with 6 db. Total output power 47.8 dBm
IoT=2145.0 L=2130.0	M _{IoT+L}	TX middle Frequency for Standalone IoT. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the IoT carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
IoT=PRB0 L=2145.0	M _{IBIoT+L}	TX middle Frequency for IoT IB. LTE carrier with 10 MHz carrier bandwidth. NB IoT IB was boosted with 6 db. Total output power 47.8 dBm
IoT=2178.8 L=2165.0	T _{IoT+L}	TX top Frequency for Standalone IoT. LTE carrier with 10 MHz carrier bandwidth. 43 dBm output power for the IoT carrier and 46 dBm output power for the LTE carrier (47.8 dBm total output power).
IoT=PRB49 L=2175.00	T _{IBIoT+L}	TX top Frequency for IoT IB. LTE carrier with 10 MHz carrier bandwidth. NB IoT IB was boosted with 6 db. Total output power 47.8 dBm
IoT ₁ =PRB-1 IoT ₂ =PRB50 L=2115.0	B _{10Guard}	TX constellation for Bottom IoT GB. LTE carrier with 10 MHz carrier bandwidth. IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB50 L=2175.0	T _{10Guard}	TX constellation for Top IoT GB. LTE carrier with 10 MHz carrier bandwidth. IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB75 L=2117.5	B _{15Guard}	TX constellation for bottom IoT GB. LTE carrier with 15 MHz carrier bandwidth. IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB75 L=2172.5	T _{15Guard}	TX constellation for Top IoT GB. LTE carrier with 15 MHz carrier bandwidth. IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB100 L=2120.0	B _{20Guard}	TX constellation for bottom IoT GB. LTE carrier with 20 MHz carrier bandwidth. IoT GB was boosted with 6 dB. Total output power 47.8 dBm.
IoT ₁ =PRB-1 IoT ₂ =PRB100 L=2170.0	T _{20Guard}	TX constellation for Top IoT GB. LTE carrier with 20 MHz carrier bandwidth. IoT GB was boosted with 6 dB. Total output power 47.8 dBm.

All RX frequencies were configured 400MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

Test frequencies used for radiated measurements

B2/25 LTE, NB IoT SA/ IB/ GB+LTE, LTE + GSM

Frequency [MHz]	Symbolic name	Comment
1932.5	B ₅	TX bottom frequency LTE carrier with 5 MHz BW configuration
1935.0	B ₁₀	TX bottom frequency LTE carrier with 10 MHz BW configuration
1962.5	M _{1.4-20}	TX middle frequency LTE carrier with 5-20 MHz BW configuration
1992.5	T ₅	TX top frequency LTE carrier with 5 MHz BW configuration
1990.0	T ₁₀	TX top frequency LTE carrier with 10 MHz BW configuration
1930.7 1932.1 1933.5 1934.9 1936.3 1937.7	B _{61.4}	6 carriers TX bottom constellation LTE carrier with 1.4 MHz BW configuration
IoT=1994.8 L=1977.5	T _{5SA-IoT}	TX top Frequency for Standalone IoT. LTE carrier with 5 MHz carrier bandwidth.
IoT=PRB0 L=1992.5	T _{5IB-IoT}	TX top Frequency for IoT inband. LTE carrier with 5 MHz carrier bandwidth.
IoT ₁ =PRB-1 IoT ₂ =PRB50 L=1990.0	T _{1GB-IoT}	1 carrier TX constellation for top IoT Guard band. LTE carrier with 10 MHz carrier bandwidth.
L=1932.5 L=1937.5 IoT=1994.8	BIM _{SA-IoT}	2 LTE carrier TX bottom constellation with 5 MHz carrier bandwidth + 1 SA IoT carrier TX top constellation.
L=1992.5 L=1987.5 IoT=1930.2	TIM _{SA-IoT}	2 LTE carrier TX top constellation with 5 MHz carrier bandwidth + 1 SA IoT carrier TX bottom constellation
G1=1930.4 G2=1931.0 L=1947.5	Bim _{G+L}	3 carriers TX constellation for Bim. LTE carrier with 5 MHz carrier bandwidth.
G1=1989.6 G2=1989.0 L=1972.5	Tim _{G+L}	3 carriers TX constellation for Tim. LTE carrier with 5 MHz carrier bandwidth.
G=1989.6 L=1987.1	GL1	TX top frequency for GSM. LTE carrier with 5 MHz carrier bandwidth.
G=1989.6 L=1972.5	GL2	TX top frequency for GSM. LTE carrier with 5 MHz carrier bandwidth.
G=1930.4 L=1947.5	GL3	TX bottom frequency for GSM. LTE carrier with 5 MHz carrier bandwidth.

All RX frequencies were configured 80MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.


B66 LTE, NB IoT SA/ IB/ GB+LTE

Frequency [MHz]	Symbolic name	Comment
2112.5	B5	TX bottom frequency LTE carrier with 5 MHz BW configuration
2115.0	B10	TX bottom frequency LTE carrier with 10 MHz BW configuration
2145.0	M5-20	TX middle frequency LTE carrier with 5-20 MHz configuration
2177.5	T5	TX top frequency LTE carrier with 5 MHz BW configuration
2175.0	T10	TX top frequency LTE carrier with 10 MHz BW configuration
2152.5 2157.5 2162.5 2167.5 2172.5 2177.5	T6 ₅	6 carriers TX top constellation LTE carrier with 5 MHz BW configuration
IoT=2179.8 L=2162.5	T5 _{SA-IoT}	TX top Frequency for Standalone IoT. LTE carrier with 5 MHz carrier bandwidth.
IoT=PRB0 L=2177.5.0	T5 _{IB-IoT}	TX top Frequency for IoT inband. LTE carrier with 5 MHz carrier bandwidth.
IoT ₁ =PRB-1 IoT ₂ =PRB50 L=2175	T1 _{GB-IoT}	1 carrier TX constellation for Top IoT Guard band. LTE carrier with 10 MHz carrier bandwidth.
L=2122.5 L=2127.5 IoT=2179.8	BIM _{SA-IoT}	2 LTE carrier TX bottom constellation with 5 MHz carrier bandwidth + 1 SA IoT carrier TX top constellation.
L=2177.5 L=2172.5 IoT=2120.2	TIM _{SA- IoT}	2 LTE carrier TX top constellation with 5 MHz carrier bandwidth + 1 SA IoT carrier TX bottom constellation


All RX frequencies were configured 400MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

Test setup: conducted measurements

Setup for measurements from 9 kHz to 3 GHz.

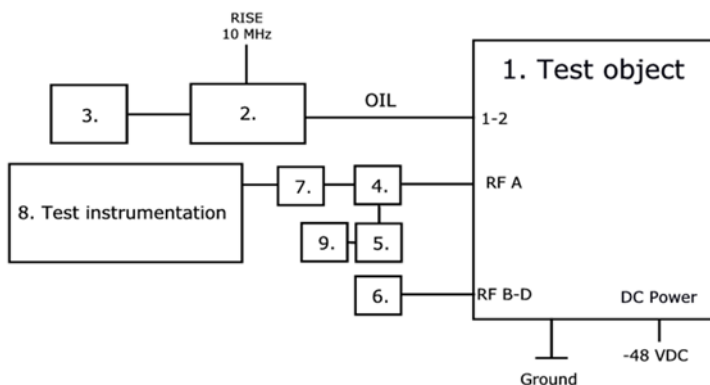

Setup for measurements from 3 GHz to 22GHz.

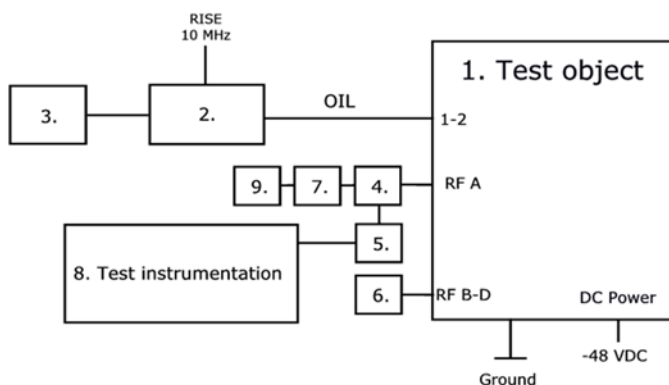

Test object:

- | | |
|----|---|
| 1. | Radio 4499 44B2/B25 44B66A C, KRC 161 847/1, rev. R1A, s/n: E23B067325
With Radio Software: CXP 901 3268/15, rev. R81JH09
FCC ID: TA8AKRC161847, IC: 287AB-AS161847 |
|----|---|


Associated equipment:

- | | |
|----|--|
| 2. | Testing Equipment:
CT10, LPC 102 487/1, rev. R1C, s/n: T01F265039, BAMS – 1001908401
with software CXC 173 5312/29, rev. R1A02 |
|----|--|

Functional test equipment:

- | | |
|----|--|
| 3. | Computer, HP ZBook 15u G3, BAMS - 1001835579 |
| 4. | Directional Coupler: RISE-number: 901 496 |
| 5. | High pass filter 3-27 GHz: RISE-Number: 901 502 |
| 6. | 50 ohm terminator on each port |
| 7. | RF Attenuator: RISE number: 902 282 |
| 8. | RISE Test Instrumentation according to measurement equipment list for each test.
The signal analyzer was connected to the RISE 10 MHz reference standard during all measurements. |
| 9. | 50 ohm SMA terminator. |

Test setup: radiated measurements

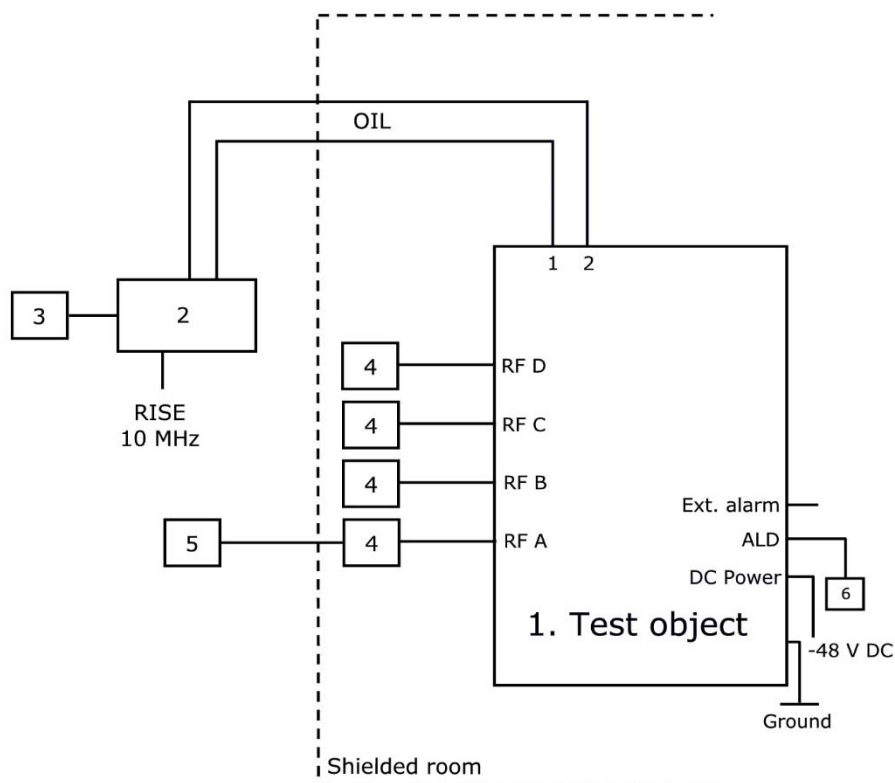

1.	Radio 4499 44B2/B25 44B66A C, KRC 161 847/1, rev. R1A, s/n: E23B067329 With Radio Software: CXP 901 3268/15, rev. R81JH09. FCC ID: TA8AKRC161847, IC: 287AB-AS161847
----	--

Associated equipment:

2.	Testing Equipment: CT10, LPC 102 487/1, rev. R1C, s/n: T01F265031, BAMS – 1000797753 with software CXC 173 5312/25, rev. R1A07
----	--

Functional test equipment:

3.	HP EliteBook 8560w, BAMS – 1001236854
4.	Attenuator/ Terminator
5.	R&S ESIB 26, SP no: 503 292 for supervision purpose only
6.	Remote Control Unit, ANDREW Model: ATM200-A20, Serial: CN10151085133

Interfaces:

Power input configuration DC: -48 VDC	Power
RF A-D, 4.3-10 connector, combined TX/RX	Antenna
1, Optical Interface Link, single mode opto fibre	Signal
2, Optical Interface Link, single mode opto fibre	Signal
ALD Control, shielded multi-wire	Signal
EXT Alarm, shielded multi-wire	Signal
Ground wire	Ground

RF power output measurements according to CFR 47 §24.232 and §27.50/ RSS-133 6.4, RSS-139 5.5 conducted

Date	Temperature	Humidity
2020-02-25	24 °C ± 3 °C	16 % ± 5 %
2020-02-26	24 °C ± 3 °C	11 % ± 5 %
2020-03-03	24 °C ± 3 °C	16 % ± 5 %
2020-03-04	25 °C ± 3 °C	16 % ± 5 %
2020-03-06	25 °C ± 3 °C	14 % ± 5 %
2020-03-30	23 °C ± 3 °C	6 % ± 5 %
2020-03-31	23 °C ± 3 °C	12 % ± 5 %
2020-04-01	24 °C ± 3 °C	16 % ± 5 %
2020-04-14	22 °C ± 3 °C	10 % ± 5 %

Test set-up and procedure

The measurements were made per definition in ANSI C63.26, 5.2.3.4. The test object was connected to a signal analyser measuring peak and RMS output power in CDF mode. A resolution bandwidth of 80 MHz was used if not specified otherwise.

Measurement equipment	RISE number
R&S FSW 43	902 073
Directional coupler	901 496
RF attenuator	902 282
Coaxial cable Megaphase	BX50191
Coaxial cable Sucoflex 102EA	BX50237
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB

Results LTE

B25 max power configuration:

Single carrier E-TM1.1

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T _{1.4}	42.03/ 8.42	41.93/ 8.42	41.95/ 8.42	42.02/ 8.42	48.00
T ₃	42.16/ 8.52	42.09/ 8.52	42.10/ 8.52	42.12/ 8.52	48.14

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Rated output power level at each RF port 1x 46 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T ₅	45.29/ 8.40	45.23/ 8.40	45.10/ 8.40	45.20/ 8.40	51.23

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B ₁₀	47.16/7.40	47.08/ 7.40	47.00/ 7.40	46.99/ 7.40	53.08
B ₁₅	47.24/7.46	47.18/ 7.46	47.20/ 7.46	47.17/ 7.46	53.22
B ₂₀	47.32/7.56	47.27/ 7.56	47.29/ 7.52	47.27/ 7.54	53.31
M ₁₀	47.24/7.30	47.21/ 7.32	47.13/ 7.30	47.13/ 7.30	53.20
M ₁₅	47.26/7.32	47.26/ 7.32	47.24/ 7.32	47.24/ 7.32	53.27
M ₂₀	47.30/7.32	47.32/ 7.32	47.28/ 7.34	47.23/ 7.34	53.30
T ₁₀	47.27/7.36	47.23/ 7.36	47.13/ 7.34	47.12/ 7.36	53.21
T ₁₅	47.46/7.38	47.41/ 7.40	47.31/ 7.38	47.25/ 7.38	53.38
T ₂₀	47.48/7.38	47.40/ 7.40	47.32/ 7.38	47.31/ 7.40	53.40

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power per 1 MHz [RMS dBm]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T _{1.4}	41.34	40.86	40.87	40.93	47.03
T ₃	38.35	38.05	38.02	38.00	44.13

Rated output power level at each RF port 1x 46 dBm/ port.

	Output power per 1 MHz [RMS dBm]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T ₅	39.01	39.08	38.93	38.99	45.02

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power per 1 MHz [RMS dBm]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T ₁₀	37.95	38.06	37.95	38.01	44.01
T ₁₅	36.53	36.50	36.37	36.35	42.46
T ₂₀	35.24	35.25	35.14	35.14	41.21

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Single carrier E-TM3.2

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T ₂₀	47.41/ 7.38	47.38/ 7.40	47.30 /7.38	47.33/ 7.38	53.38

Single carrier E-TM3.1

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T ₂₀	47.38/7.40	47.37/ 7.42	47.35/ 7.40	47.35/ 7.40	53.38

Single carrier E-TM3.1a

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T ₂₀	47.39/7.40	47.40/ 7.40	47.32/ 7.40	47.37/ 7.40	53.39

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Multi carrier E-TM1.1

Rated output power level at each RF port 6x 40 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
M10 ₆	46.86/ 7.80	46.85/ 7.78	46.90/ 7.80	46.88/ 7.76	52.89

Multi carrier E-TM1.1

Rated output power level at each RF port 2x 44.7 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
CA _{M20+20}	47.26/ 7.46	47.22/ 7.46	47.21/ 7.46	47.23/ 7.46	53.25

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

B66 max power configuration:

Single carrier E-TM1.1

Rated output power level at each RF port 1x 46 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B ₅	45.40/ 8.38	45.44/ 8.38	45.36/ 8.38	45.60/ 8.38	51.47

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B ₁₀	47.19/ 7.34	47.32/ 7.34	47.24/ 7.34	47.24/ 7.34	53.27
B ₁₅	47.29/ 7.36	47.41/ 7.36	47.28/ 7.36	47.39/ 7.36	53.36
B ₂₀	47.34/ 7.38	47.55/ 7.38	47.30/ 7.38	47.42/ 7.38	53.43
M ₁₀	47.12/ 7.32	47.18/ 7.30	47.15/ 7.32	47.27/ 7.32	53.20
M ₁₅	47.13/ 7.32	47.22/ 7.32	47.15/ 7.34	47.28/ 7.34	53.22
M ₂₀	47.15/ 7.32	47.25/ 7.32	47.18/ 7.34	47.29/ 7.34	53.24
T ₁₀	46.98/ 7.36	47.11/ 7.36	47.05/ 7.36	47.08/ 7.36	53.08
T ₁₅	47.16/ 7.38	47.22/ 7.40	47.16/ 7.38	47.21/ 7.38	53.21
T ₂₀	47.16/ 7.40	47.27/ 7.40	47.16/ 7.40	47.25/ 7.40	53.23

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Rated output power level at each RF port 1x 46 dBm/ port.

	Output power per 1 MHz [RMS dBm]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B ₅	39.42	39.21	39.19	39.14	45.26

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power per 1 MHz [RMS dBm]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B ₁₀	38.08	38.26	38.13	38.08	44.15
B ₁₅	36.44	36.59	36.45	36.51	42.52
B ₂₀	35.18	35.35	35.19	35.20	41.25

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Single carrier E-TM3.2

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B ₂₀	47.35/ 7.36	47.49/ 7.36	47.45/ 7.36	47.51/ 7.36	53.47

Single carrier E-TM3.1

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B ₂₀	47.35/ 7.38	47.54/ 7.38	47.44/ 7.38	47.51/ 7.38	53.48

Single carrier E-TM3.1a

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B ₂₀	47.37/ 7.38	47.54/ 7.36	47.43/ 7.38	47.51/ 7.38	53.48

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Multi carrier E-TM1.1

Rated output power level at each RF port 6x 40 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
M10 ₆	47.07/ 7.30	47.14/ 7.30	47.01/ 7.28	47.12/ 7.32	53.11

Multi carrier E-TM1.1

Rated output power level at each RF port 2x 44.7 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
CA _{M20+20}	46.97/ 7.50	47.20/ 7.50	47.21/ 7.50	47.29/ 7.50	53.19

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Results GSM

CCDF resolution bandwidth of 5 MHz was used for GSM.

B2 max power configuration:

Multi RAT: GSM: GMSK, LTE: E-TM1.1

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B _{G+L}	41.66/ 0.36	41.50/ 0.36	41.38/ 0.28	41.52/ 0.34	47.54
M _{G+L}	42.52/ 0.28	42.33/ 0.28	42.33/ 0.28	42.36/ 0.36	48.41
T _{G+L}	42.39/ 0.32	42.43/ 0.38	42.34/ 0.28	42.24/ 0.28	48.37

Note: The PAR value is the 0.1 % Peak to Average Ratio.

	Output power per 1 MHz [RMS dBm]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
M _{G+L}	42.58	42.38	42.39	42.39	48.45

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Multi RAT: GSM: AQPSK, LTE: E-TM1.1

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
M _{G+L}	42.44/ 3.64	42.40/ 3.60	42.42/ 3.64	42.35/ 3.62	48.42

Multi RAT: GSM: 8-PSK, LTE: E-TM1.1

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
M _{G+L}	42.35/ 3.46	42.32/ 3.46	42.34/ 3.46	42.38/ 3.46	48.37

Multi RAT: GSM: GMSK, LTE: E-TM1.1

Rated output power level at each RF port 4x 40.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
M _{4G+L}	45.96/ 6.06	45.88/ 6.06	45.80/ 6.04	45.90/ 6.08	51.91

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Results NB IoT SA, LTE with NB IoT GB

CCDF resolution bandwidth of 5 MHz was used for NB IoT SA.

Due to a 86 % duty cycle of the IoT carrier, 0.65 dBm was added to the measured value of the NB IoT Stand Alone carriers according to ANSI C63.26, 5.2.4.4.2, j.

B25 max power configuration:

Multi RAT: NB IoT SA: N-TM, LTE: E-TM1.1

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B _{IoT+L}	41.23/ 7.00	41.14/ 7.00	41.06/ 7.00	40.88/ 7.00	47.10
M _{IoT+L}	42.07/ 7.00	42.04/ 7.00	41.85/ 7.00	41.90/ 7.00	47.99
T _{IoT+L}	41.87/ 7.00	41.77/ 7.00	41.68/ 7.00	41.13/ 6.98	47.64

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power per 1 MHz [RMS dBm]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
M _{IoT+L}	42.30	42.24	42.1	42.16	48.22

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

LTE with NB IoT GB: NB IoT GB: N-TM, LTE: E-TM3.1

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T10 _{Guard}	46.87/ 7.46	46.98/ 7.46	46.86/ 7.46	46.88/ 7.46	52.92
T15 _{Guard}	47.09/ 7.46	47.22/ 7.46	47.10/ 7.44	47.09/ 7.44	53.15
T20 _{Guard}	47.06/ 7.48	47.17/ 7.50	47.10/ 7.48	47.06/ 7.48	53.12

B66 max power configuration:

Multi RAT: NB IoT SA: N-TM, LTE: E-TM1.1

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
B _{IoT+L}	41.65/ 6.98	41.74/ 6.98	41.56/ 6.98	41.66/ 6.98	47.67
M _{IoT+L}	41.85/ 6.98	41.94/ 6.98	41.91/ 6.98	41.98/ 6.98	47.94
T _{IoT+L}	41.49/ 6.98	41.55/ 6.98	41.48/ 6.98	41.56/ 6.98	47.54

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Rated output power level at each RF port 1x 43 dBm/ port.

	Output power per 1 MHz [RMS dBm]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
M _{IoT+L}	41.81	41.82	42.15	41.66	47.88

¹⁾: summed output power according to ANSI C63.26 5.2.5.3 and 6.4.3.2.3.

LTE with NB IoT GB: NB IoT GB: N-TM, LTE: E-TM3.1

Rated output power level at each RF port 1x 47.8 dBm/ port.

	Output power CCDF [RMS dBm/ PAR dB]				
Symbolic name	Port RF A	Port RF B	Port RF C	Port RF D	Total power ¹⁾
T10 _{Guard}	46.99/7.46	47.16/7.46	47.08/7.46	47.09/7.46	53.10
T15 _{Guard}	47.15/7.42	47.27/7.42	47.14/7.42	47.23/7.42	53.22
T20 _{Guard}	47.19/7.44	47.30/7.44	47.17/7.44	47.26/7.44	53.25

Remark

This unit is tested without antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/ISED Bureau(s). Licensee's are required to take into account maximum allowed antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.

Limits

§24.232 and RSS-133 6.4

The maximum output power may not exceed 3280 W/MHz (EIRP).

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

§27.50 (d) and RSS-139 6.5

The maximum output power may not exceed 3280 W/MHz (EIRP).

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Complies?	Yes
-----------	-----

Occupied bandwidth measurements according to CFR47 §2.1049/ RSS-Gen 4.6.1

Date	Temperature	Humidity
2020-03-05	24 °C ± 3 °C	17 % ± 5 %
2020-03-06	25 °C ± 3 °C	14 % ± 5 %
2020-03-26	23 °C ± 3 °C	15 % ± 5 %
2020-03-27	23 °C ± 3 °C	14 % ± 5 %
2020-03-31	23 °C ± 3 °C	12 % ± 5 %
2020-04-01	24 °C ± 3 °C	16 % ± 5 %
2020-04-02	23 °C ± 3 °C	17 % ± 5 %
2020-04-03	24 °C ± 3 °C	16 % ± 5 %
2020-05-04	23 °C ± 3 °C	16 % ± 5 %
2020-05-05	22 °C ± 3 °C	14 % ± 5 %

Test set-up and procedure

The measurements were made per definition in ANSI C63.26, 5.4.4. The output was connected to a signal analyzer with the Peak detector activated in max hold. The built in OBW function was used.

Measurement equipment	RISE number
R&S FSW 43	902 073
Directional coupler	901 496
RF attenuator	902 282
Coaxial cable Megaphase	BX50191
Coaxial cable Sucoflex 102EA	BX50237
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results LTE

B25 max power configuration:

Single carrier E-TM1.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
-	B _{1.4}	RF A	1.104
-	B ₂₀	RF A	17.875
1.1	M _{1.4}	RF A	1.104
1.2	M ₃	RF A	2.692
1.3	M ₅	RF A	4.477
1.4	M ₁₀	RF A	8.962
1.5	M ₁₅	RF A	13.453
1.6	M ₂₀	RF A	17.879
-	T _{1.4}	RF A	1.104
-	T ₂₀	RF A	17.874
-	T ₂₀	RF B	17.871
-	T ₂₀	RF C	17.873
-	T ₂₀	RF D	17.880

Single carrier E-TM3.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
-	T_{20}	RF A	17.879
-	T_{20}	RF B	17.872
1.7	T_{20}	RF C	17.882
-	T_{20}	RF D	17.867

Single carrier E-TM3.1a

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
1.8	T_{20}	RF A	17.866
-	T_{20}	RF B	17.856
-	T_{20}	RF C	17.865
-	T_{20}	RF D	17.864

Single carrier E-TM3.2

Diagram	Symbolic name	Tested Port		Occupied BW (99%) [MHz]
-	$B_{1,4}$	RF A		1.097
-	B_{20}	RF A		17.907
1.9	$M_{1,4}$	RF A		1.097
1.10	M_3	RF A		2.691
1.11	M_5	RF A		4.463
1.12	M_{10}	RF A		8.948
1.13	M_{15}	RF A		13.460
1.14	M_{20}	RF A		17.907
-	$T_{1,4}$	RF A		1.096
-	T_{20}	RF A		17.893
-	T_{20}	RF B		17.912
-	T_{20}	RF C		17.910
-	T_{20}	RF D		17.915

Carrier Aggregation E-TM3.2

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
1.15	CA- M_{20-20}	RF A	37.752

B66 max power configuration:

Single carrier E-TM1.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
-	B ₅	RF B	4.477
-	B ₂₀	RF A	17.872
-	B ₂₀	RF B	17.880
-	B ₂₀	RF C	17.881
-	B ₂₀	RF D	17.881
1.16	M ₅	RF B	4.477
1.17	M ₁₀	RF B	8.970
1.18	M ₁₅	RF B	13.444
1.19	M ₂₀	RF B	17.880
-	T ₅	RF B	4.475
-	T ₂₀	RF B	17.859

Single carrier E-TM3.2

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
-	B ₅	RF B	4.467
-	B ₂₀	RF A	17.902
-	B ₂₀	RF B	17.899
-	B ₂₀	RF C	17.870
-	B ₂₀	RF D	17.909
1.20	M ₅	RF B	4.464
1.21	M ₁₀	RF B	8.967
1.22	M ₁₅	RF B	13.467
1.23	M ₂₀	RF B	17.893
-	T ₅	RF B	4.467
-	T ₂₀	RF B	17.913

Single carrier E-TM3.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
-	B ₂₀	RF A	17.870
-	B ₂₀	RF B	17.888
-	B ₂₀	RF C	17.884
1.24	B ₂₀	RF D	17.890

Single carrier E-TM3.1a

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
-	B ₂₀	RF A	17.875
-	B ₂₀	RF B	17.873
1.25	B ₂₀	RF C	17.876
-	B ₂₀	RF D	17.875

Carrier Aggregation E-TM3.2

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
1.26	CA-M ₂₀₋₂₀	RF B	37.789

Results GSM

B2 max power configuration:

Multi RAT: GSM: GMSK, LTE: E-TM1.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [kHz]
-	B _{G+L}	RF A	244.141
1.27	M _{G+L}	RF A	244.035
1.28	M _{G+L}	RF B	244.952
1.29	M _{G+L}	RF C	244.166
1.30	M _{G+L}	RF D	244.345
-	T _{G+L}	RF A	244.331

Multi RAT: GSM: AQPSK, LTE: E-TM1.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [kHz]
1.31	M _{G+L}	RF A	240.980

Multi RAT: GSM: 8PSK, LTE: E-TM1.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [kHz]
-	B _{G+L}	RF A	244.351
1.32	M _{G+L}	RF A	244.807
1.33	M _{G+L}	RF B	244.626
1.34	M _{G+L}	RF C	244.562
1.35	M _{G+L}	RF D	244.644
-	T _{G+L}	RF A	245.122

Results NB IoT SA/ GB

B25 max power configuration:

Multi RAT: NB IoT SA: N-TM, LTE: E-TM1.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [kHz]
-	B _{IoT+L}	RF A	199.734
1.36	M _{IoT+L}	RF A	199.582
1.37	M _{IoT+L}	RF B	199.594
1.38	M _{IoT+L}	RF C	199.569
1.39	M _{IoT+L}	RF D	199.618
-	T _{IoT+L}	RF A	199.414

LTE with NB IoT GB: NB IoT GB: N-TM, LTE: E-TM3.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
1.40	T10 _{Guard}	RF A	9.394
1.41	T15 _{Guard}	RF A	14.037
1.42	T20 _{Guard}	RF A	18.432

B66 max power configuration:

Multi RAT: NB IoT SA: N-TM, LTE: E-TM1.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [kHz]
-	B _{IoT+L}	RF B	196.646
1.43	M _{IoT+L}	RF A	196.918
1.44	M _{IoT+L}	RF B	196.754
1.45	M _{IoT+L}	RF C	197.212
1.46	M _{IoT+L}	RF D	197.695
-	T _{IoT+L}	RF B	197.409

LTE with NB IoT GB: NB IoT GB: N-TM, LTE: E-TM3.1

Diagram	Symbolic name	Tested Port	Occupied BW (99%) [MHz]
1.47	B10 _{Guard}	RF B	9.394
1.48	B15 _{Guard}	RF B	14.034
1.49	B20 _{Guard}	RF B	18.428

Diagram 1.1, E-TM1.1, $M_{1,4}$, Port A:



Diagram 1.2, E-TM1.1, M_3 , Port A:

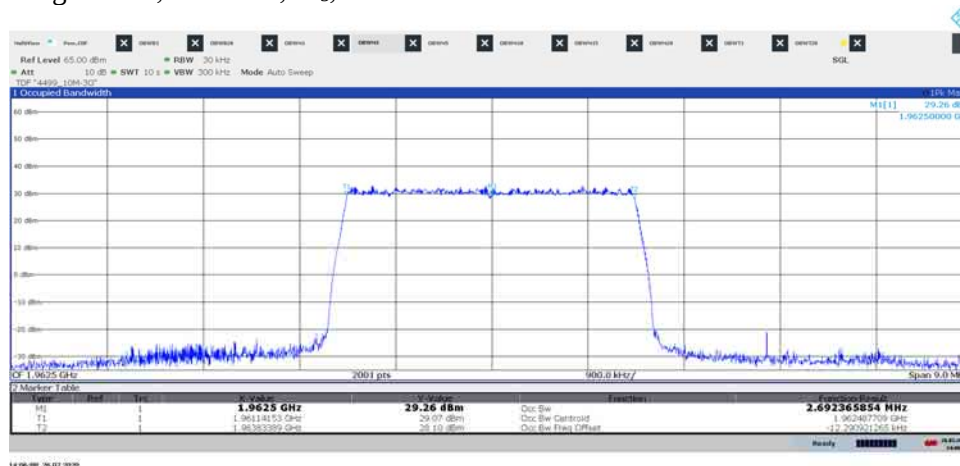


Diagram 1.3, E-TM1.1, M_5 , Port A:

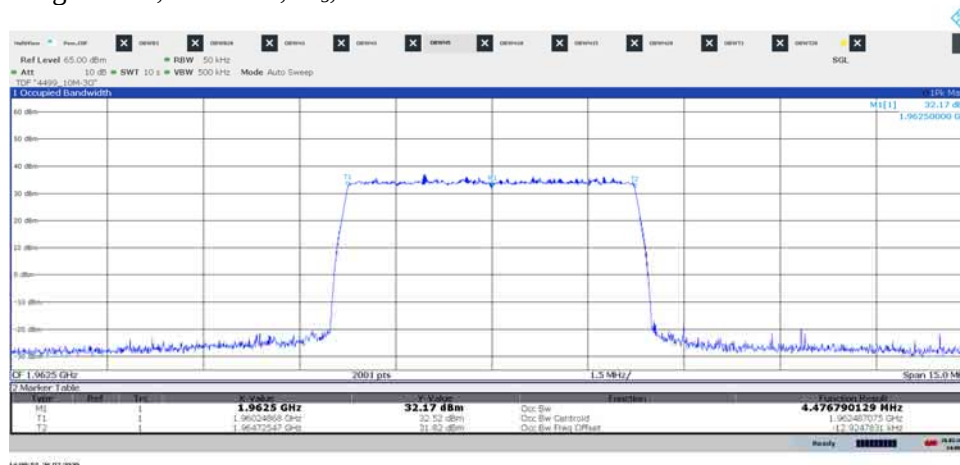


Diagram 1.4, E-TM1.1, M₁₀, Port A:

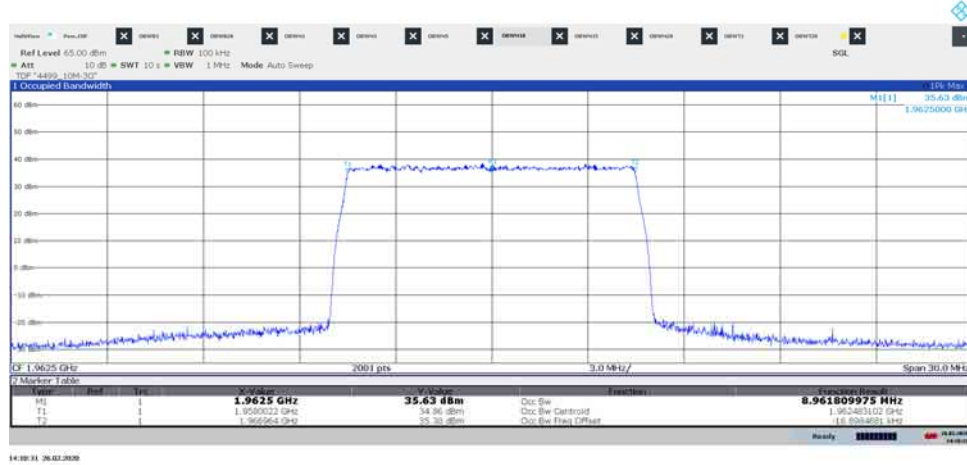


Diagram 1.5, E-TM1.1, M₁₅, Port A:

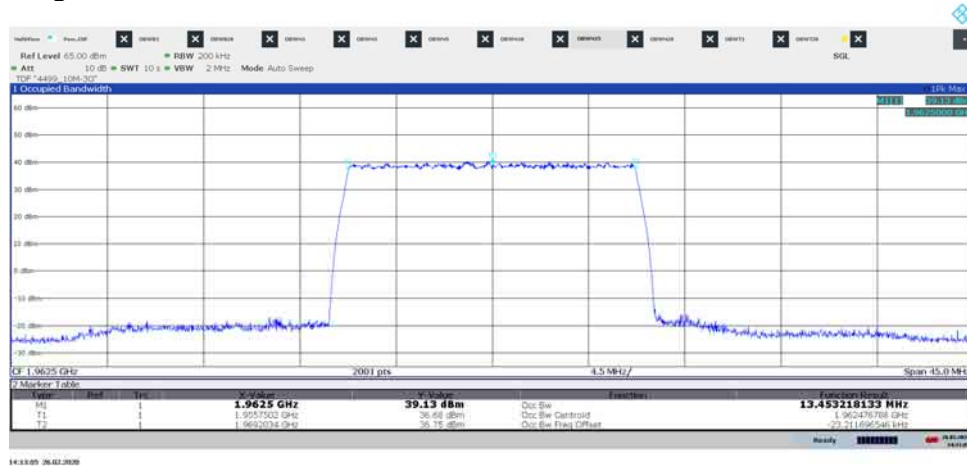


Diagram 1.6, E-TM1.1, M₂₀, Port A:

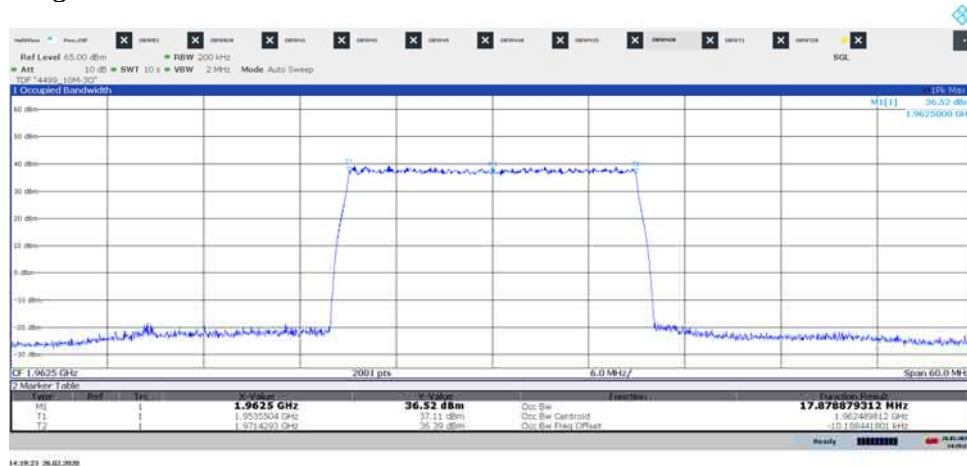


Diagram 1.7, E-TM3.1, T₂₀, Port C:

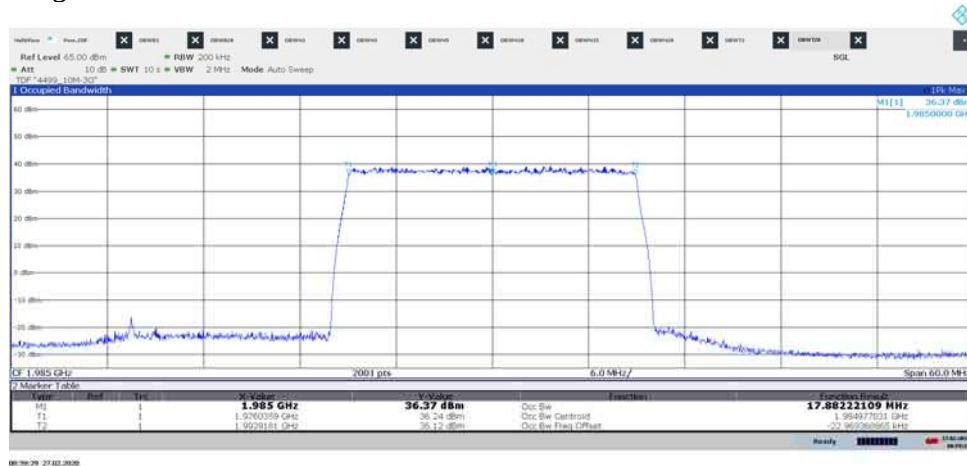


Diagram 1.8, E-TM3.1a, B₂₀, Port A:

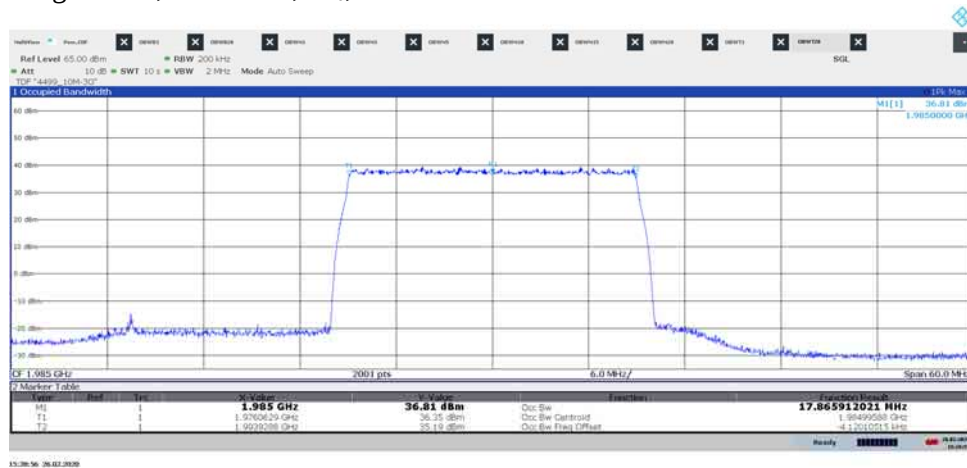


Diagram 1.9, E-TM3.2, M_{1,4}, Port A:



Diagram 1.10, E-TM3.2, M₃, Port A:

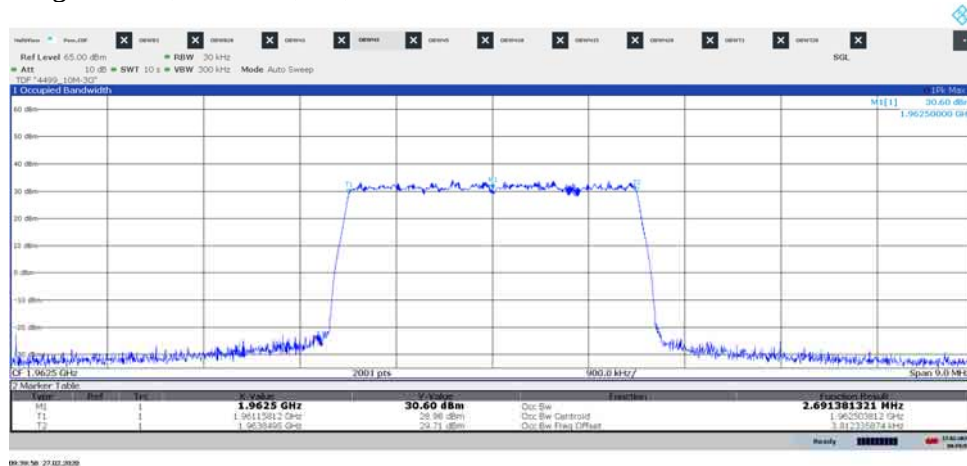


Diagram 1.11, E-TM3.2, M₅, Port A:



Diagram 1.12, E-TM3.2, M₁₀, Port A:



Diagram 1.13, E-TM3.2, M₁₅, Port A:

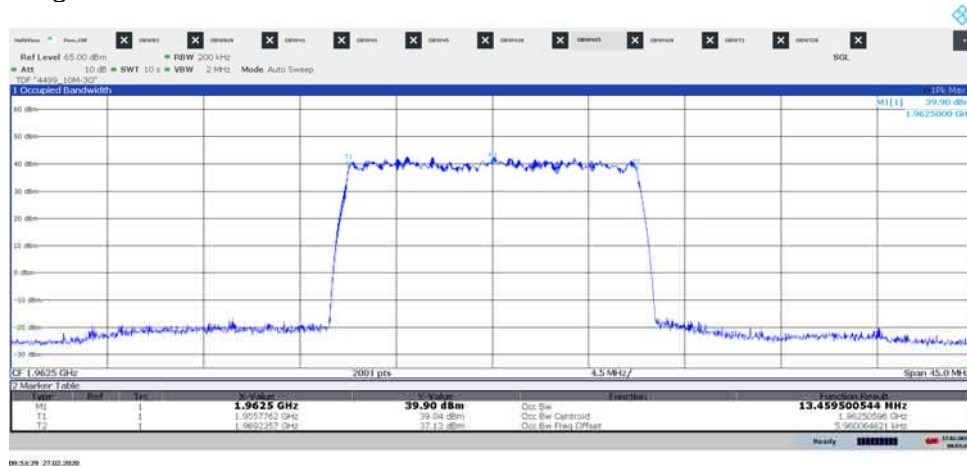


Diagram 1.14, E-TM3.2, M₂₀, Port A:

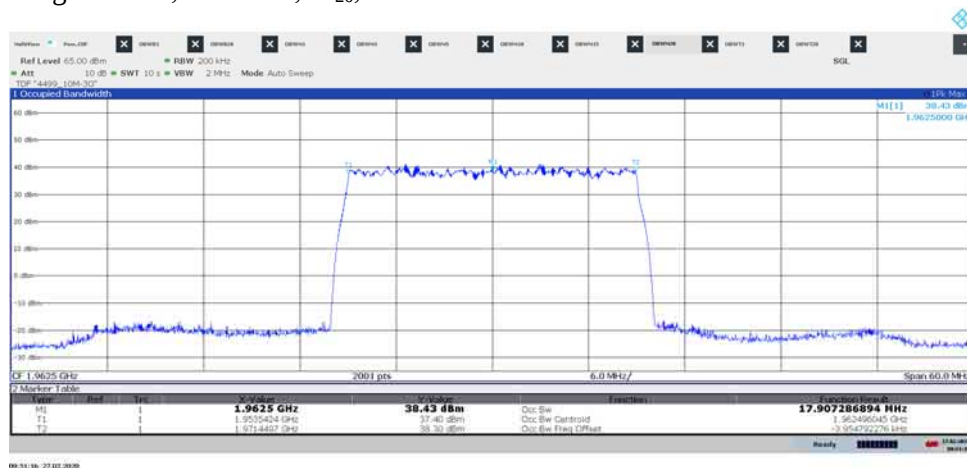


Diagram 1.15, E-TM3.2, CA-M₂₀₋₂₀, Port A:

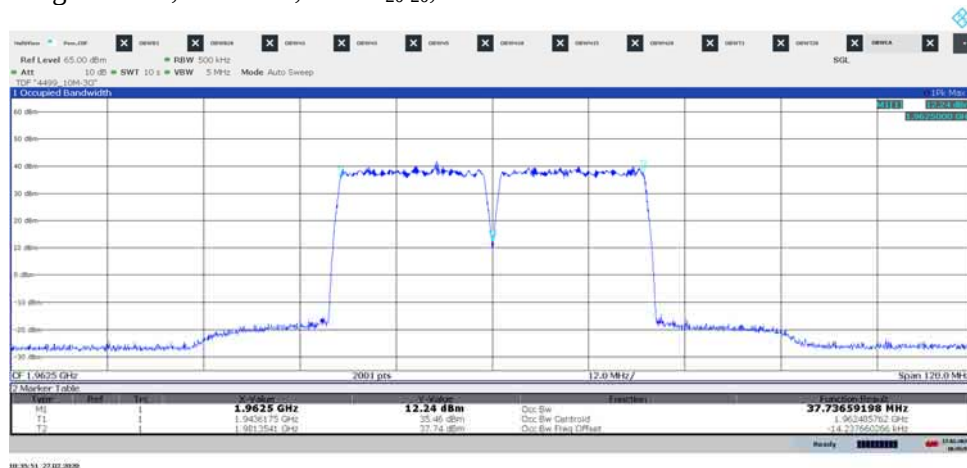


Diagram 1.16, E-TM1.1, M₅, Port B:

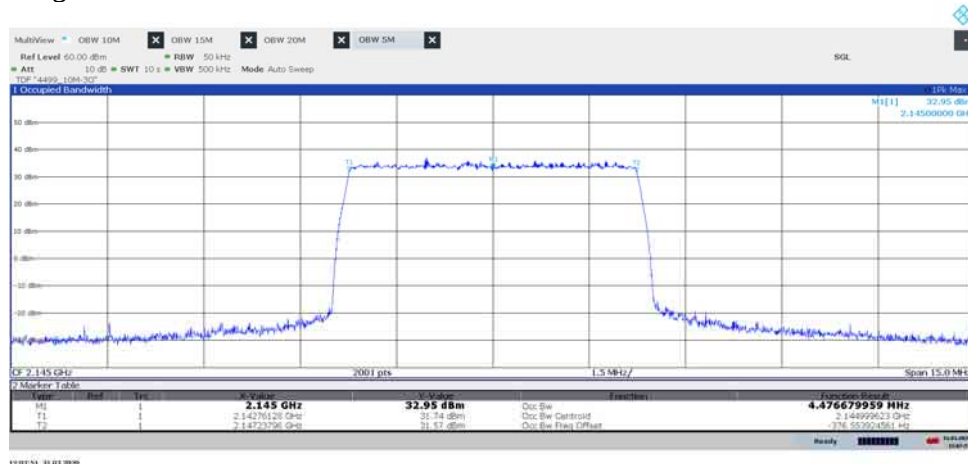


Diagram 1.17, E-TM1.1, M₁₀, Port B:

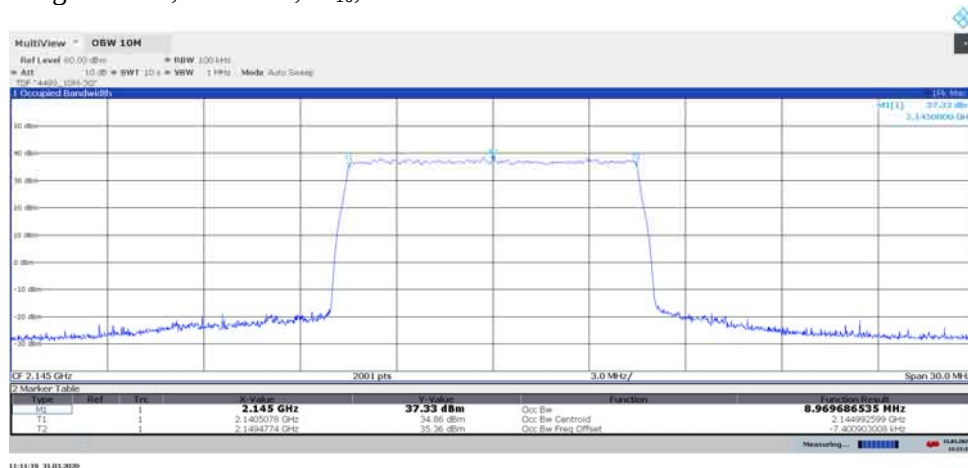


Diagram 1.18, E-TM1.1, M₁₅, Port B:

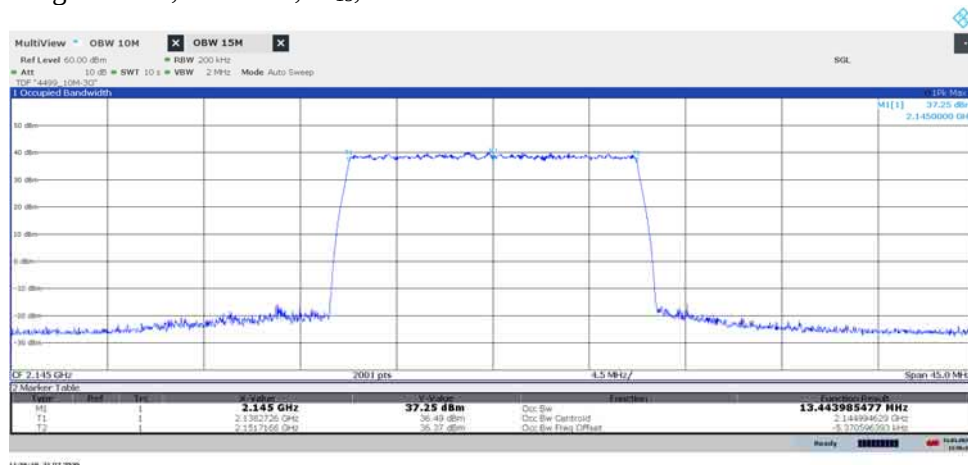


Diagram 1.19, E-TM1.1, M₂₀, Port B:

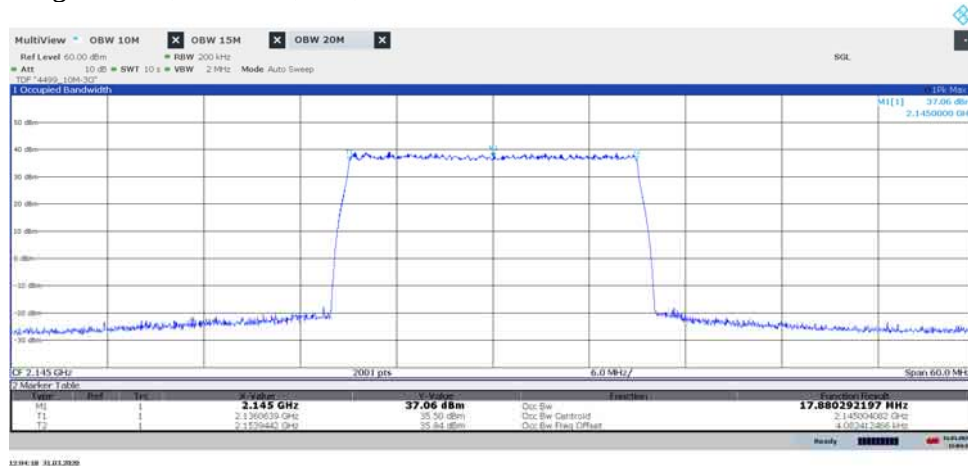


Diagram 1.20, E-TM3.2, M₅, Port B:

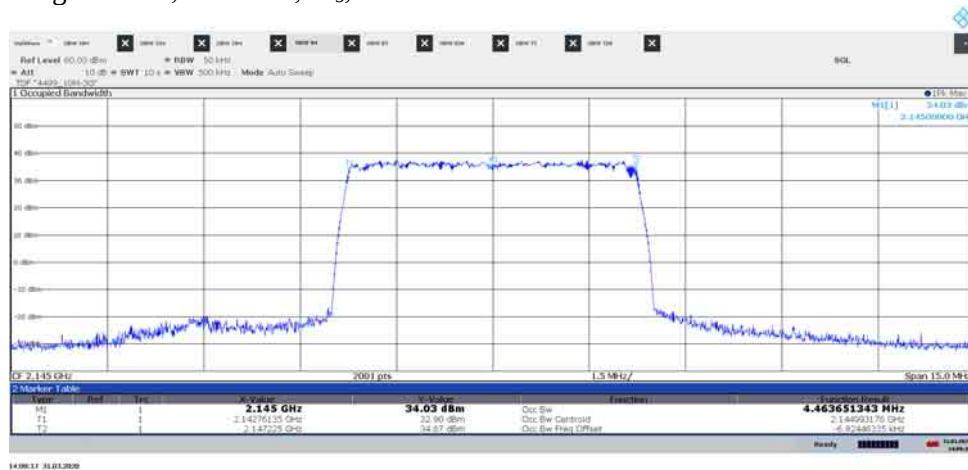


Diagram 1.21, E-TM3.2, M₁₀, Port B:

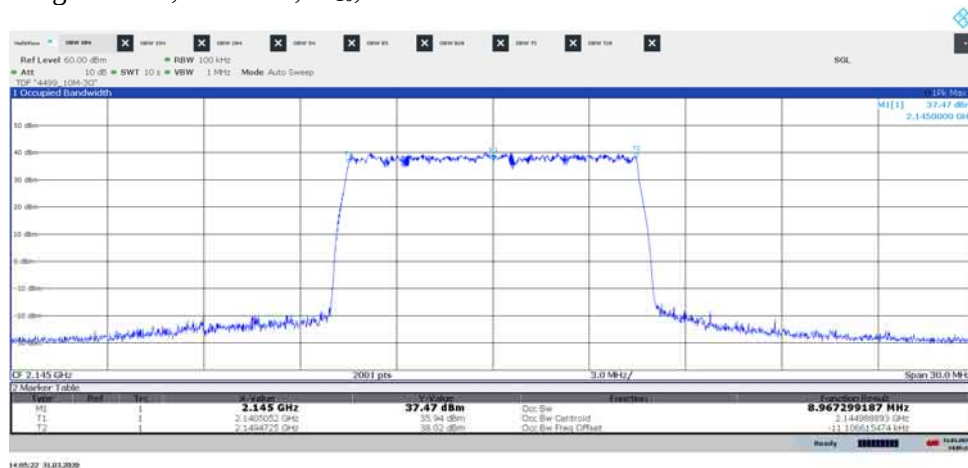


Diagram 1.22, E-TM3.2, M₁₅, Port B:

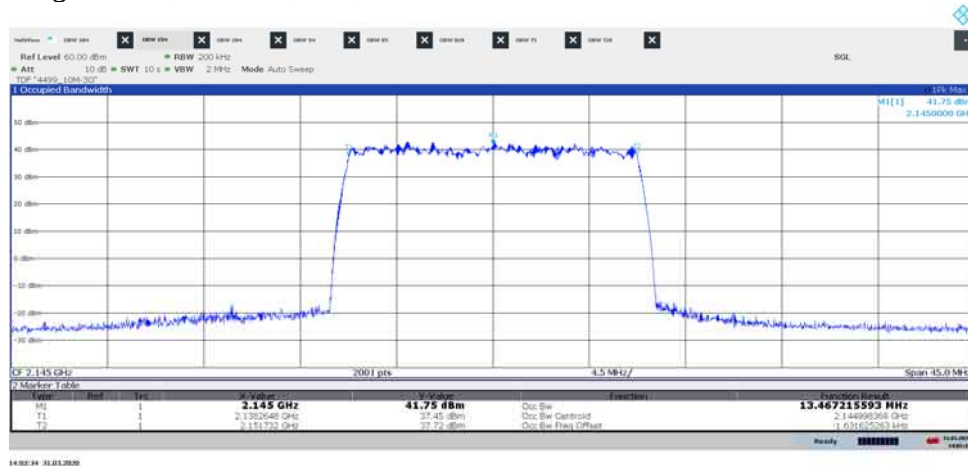


Diagram 1.23, E-TM3.2, M₂₀, Port B:

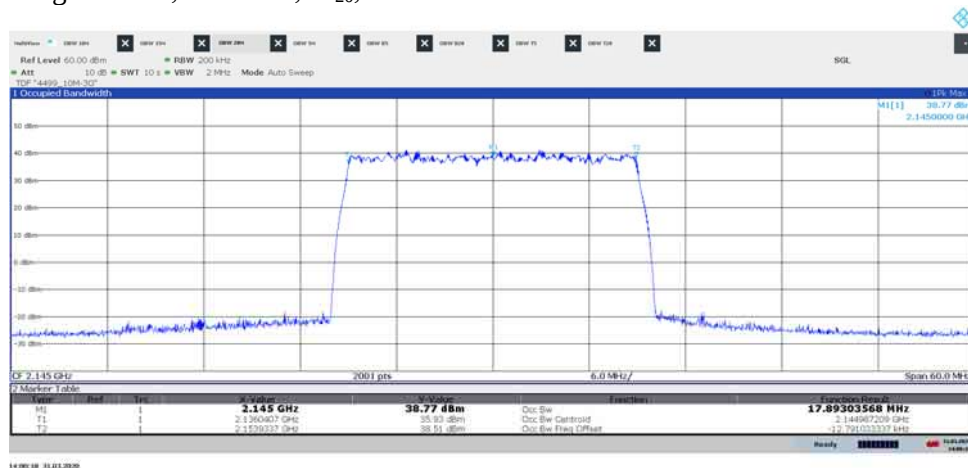


Diagram 1.24, E-TM3.1, B₂₀, Port D:

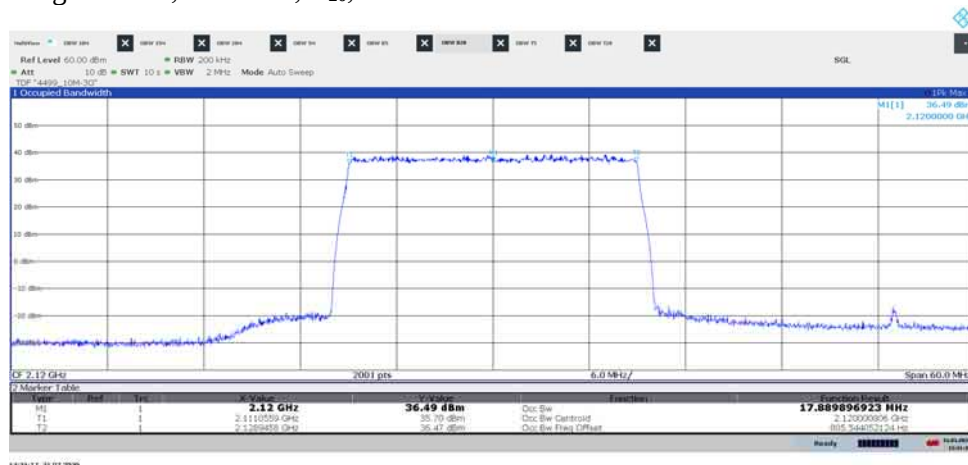


Diagram 1.25, E-TM3.1a, B₂₀, Port C:

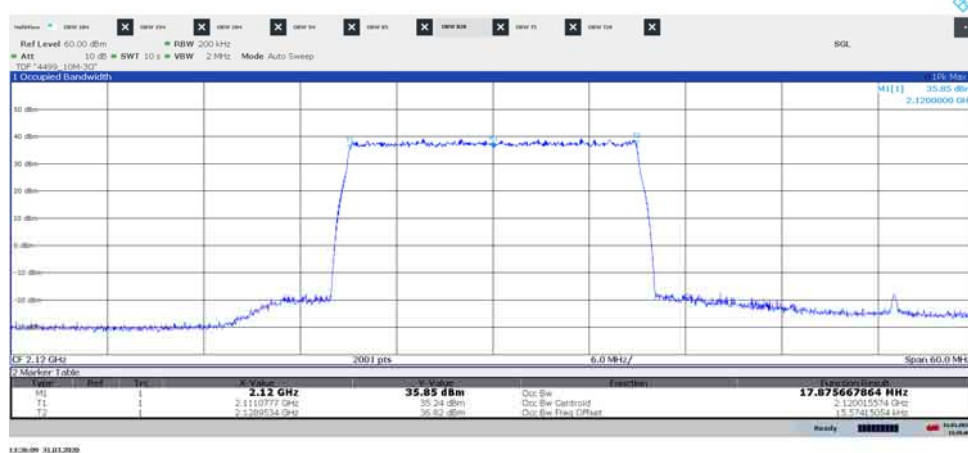


Diagram 1.26, E-TM3.2, CA-M₂₀, Port B:

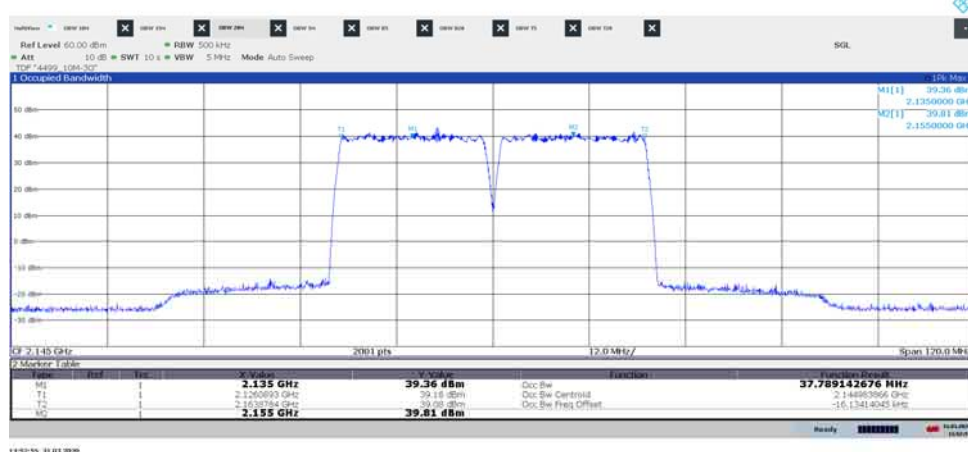


Diagram 1.27, GSM: GMSK, LTE: E-TM1.1, M_{G+L}, Port A:

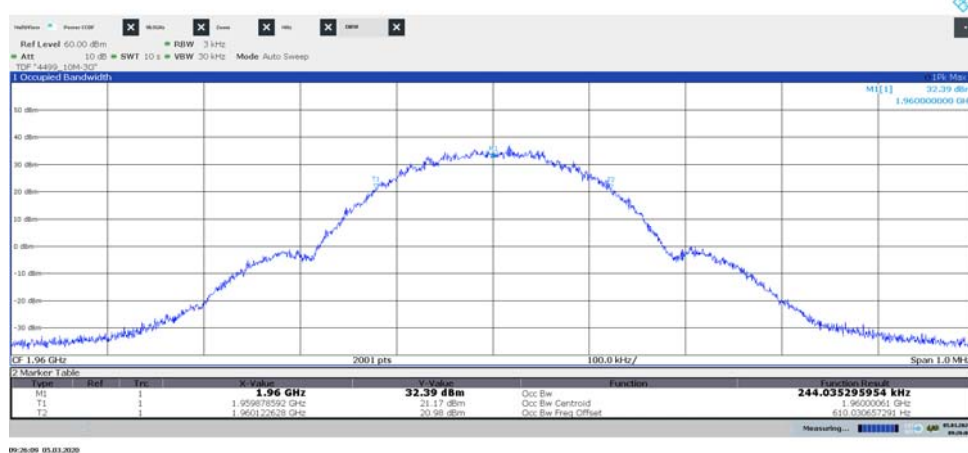


Diagram 1.28, GSM: GMSK, LTE: E-TM1.1, M_{G+L} , Port B:

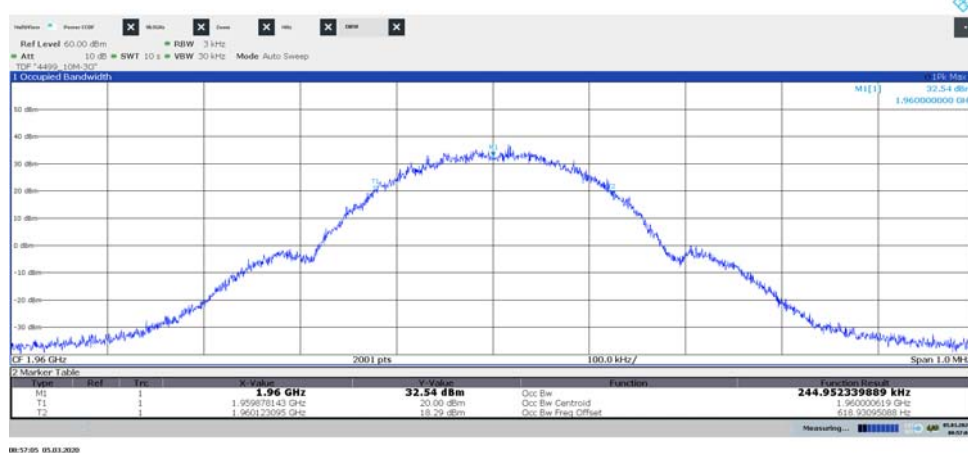


Diagram 1.29, GSM: GMSK, LTE: E-TM1.1, M_{G+L} , Port C:

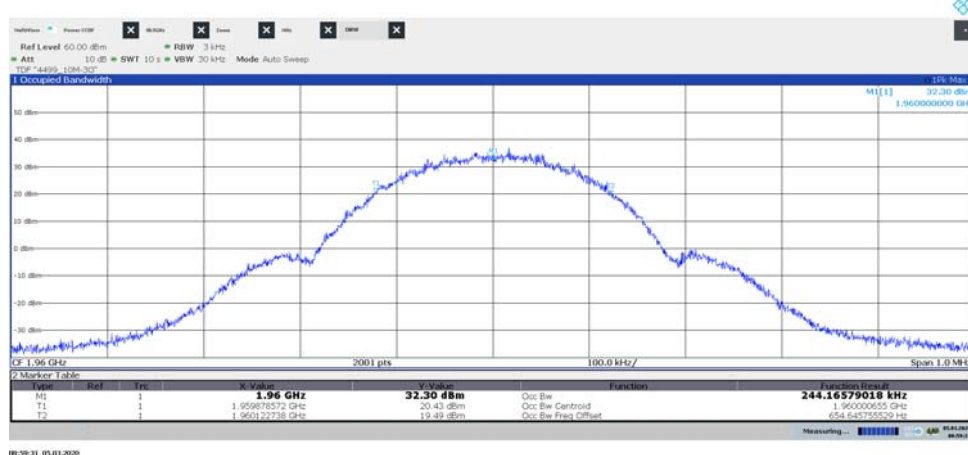


Diagram 1.30, GSM: GMSK, LTE: E-TM1.1, M_{G+L} , Port D:

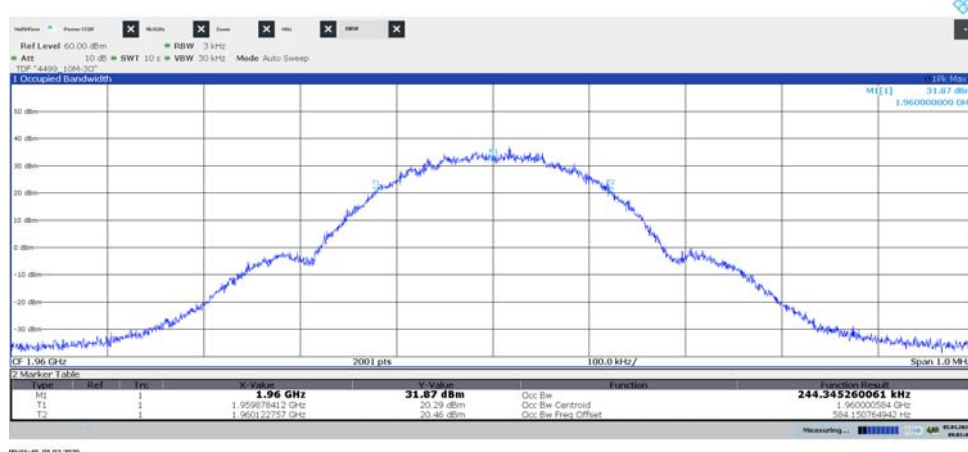


Diagram 1.31, GSM: AQPSK, LTE: E-TM1.1, M_{G+L} , Port A:

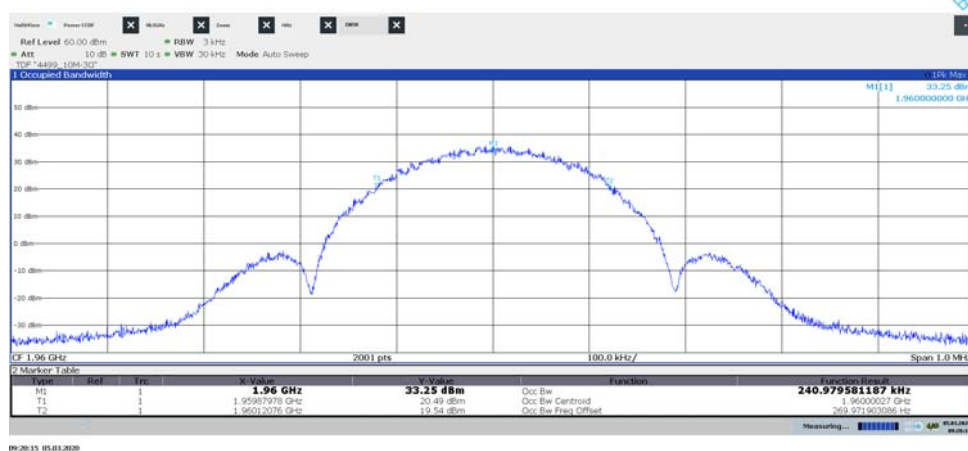


Diagram 1.32, GSM: 8PSK, LTE: E-TM1.1, M_{G+L} , Port A:



Diagram 1.33, GSM: 8PSK, LTE: E-TM1.1, M_{G+L} , Port B:

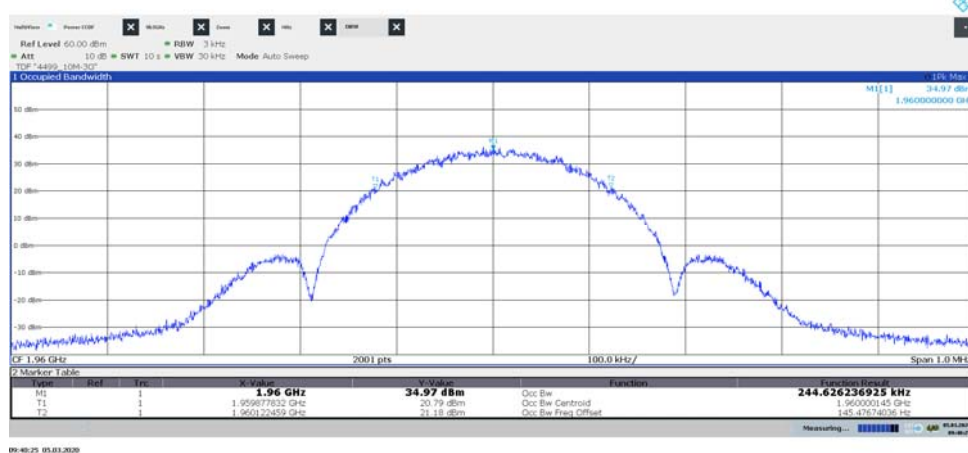


Diagram 1.34, GSM: 8PSK, LTE: E-TM1.1, M_{G+L} , Port C:

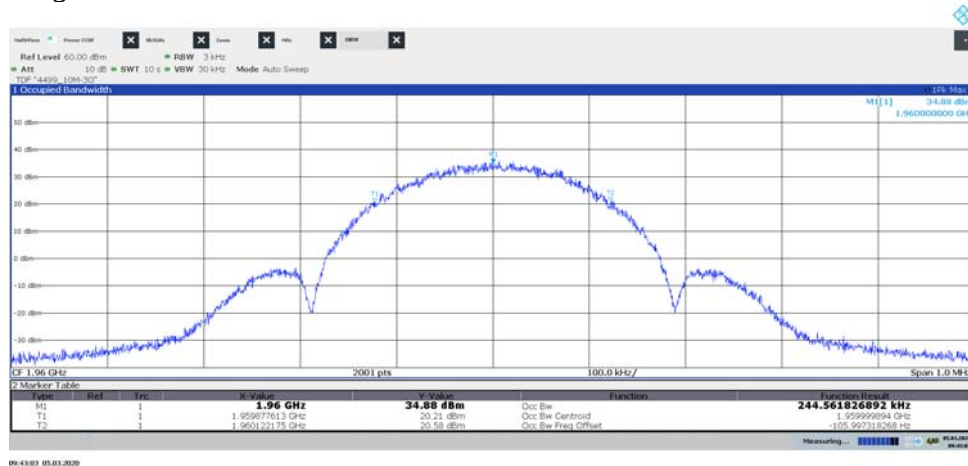


Diagram 1.35, GSM: 8PSK, LTE: E-TM1.1, M_{G+L} , Port D:

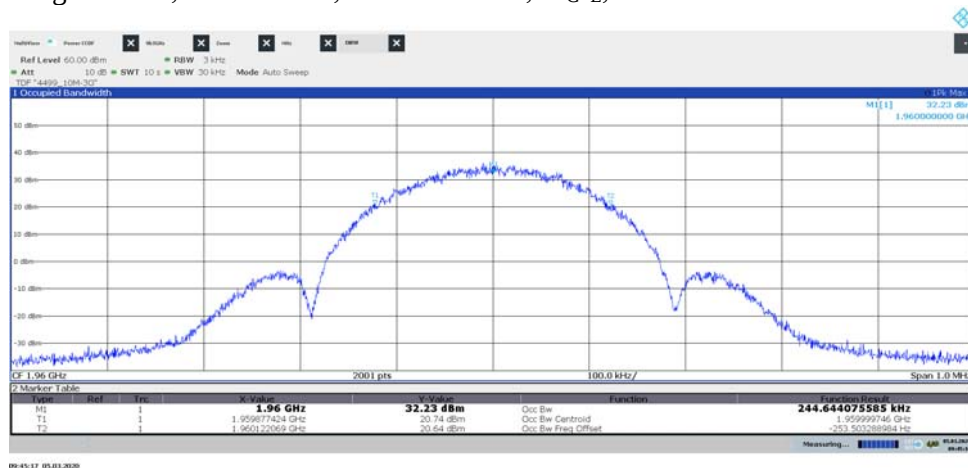


Diagram 1.36, NB IoT SA: N-TM, LTE: E-TM1.1, M_{IoT+L} , Port A:

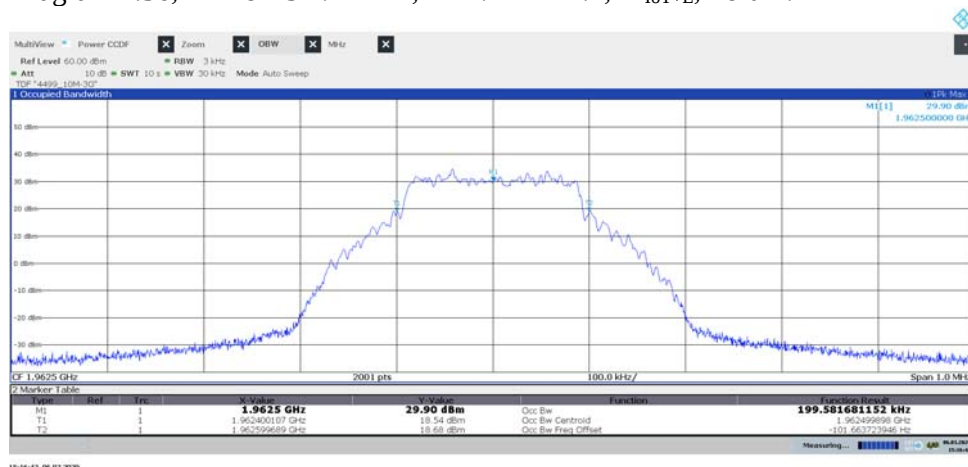


Diagram 1.37, NB IoT SA: N-TM, LTE: E-TM1.1, M_{IoT+L} , Port B:

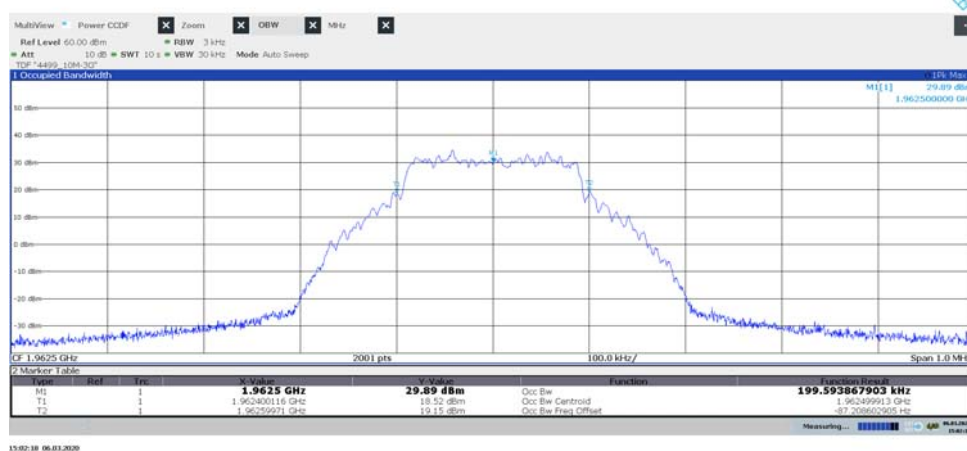


Diagram 1.38, NB IoT SA: N-TM, LTE: E-TM1.1, M_{IoT+L} , Port C:

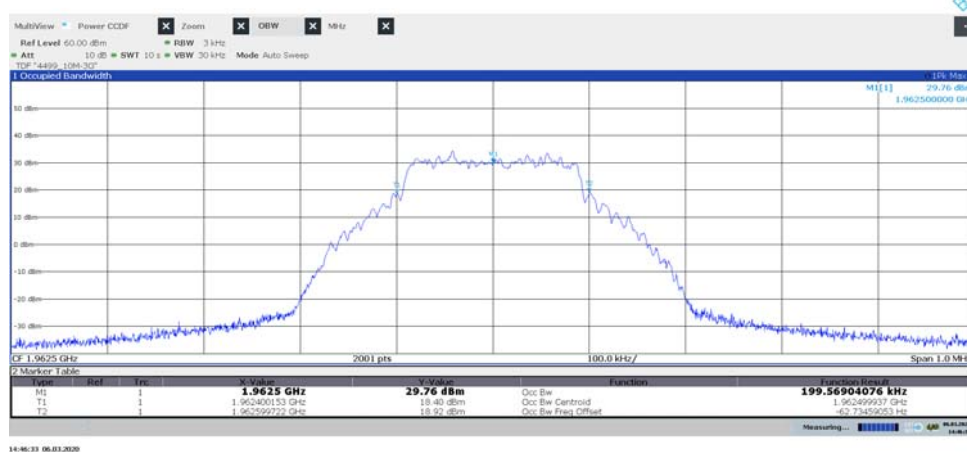


Diagram 1.39, NB IoT SA: N-TM, LTE: E-TM1.1, M_{IoT+L} , Port D:

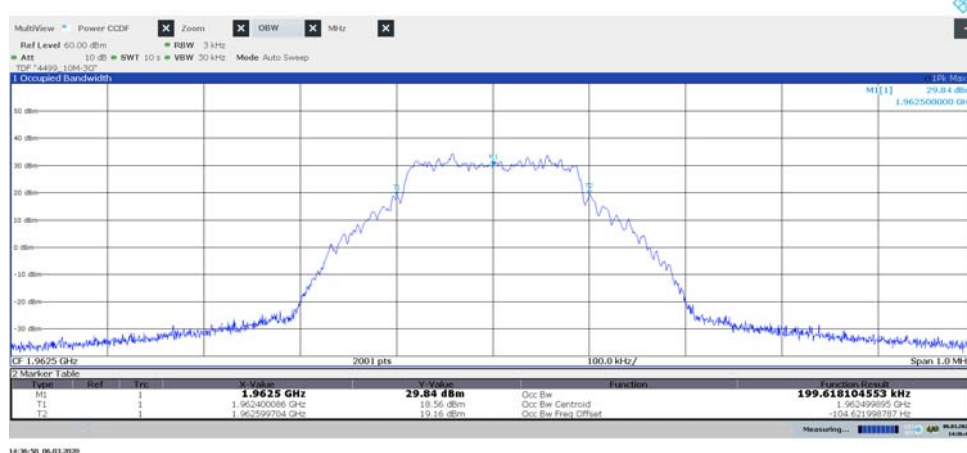


Diagram 1.40, NB IoT GB: N-TM, LTE: E-TM3.1, T10_{Guard}, Port A:

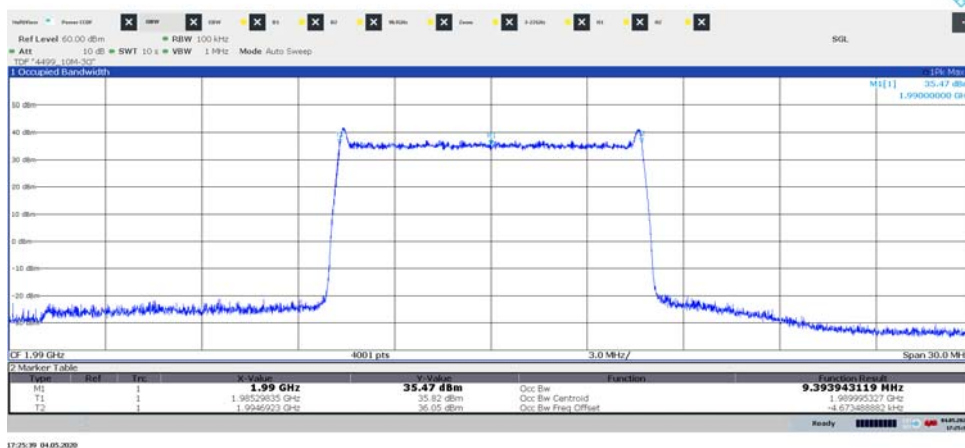


Diagram 1.41, NB IoT GB: N-TM, LTE: E-TM3.1, T15_{Guard}, Port A:

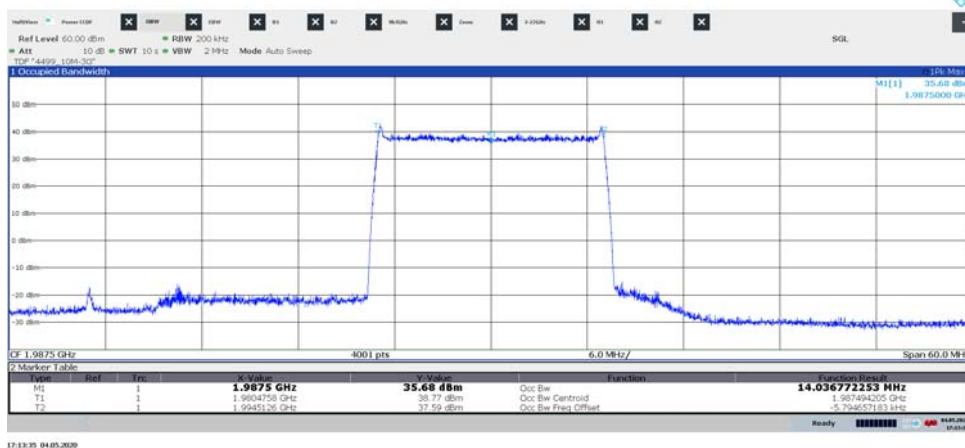


Diagram 1.42, NB IoT GB: N-TM, LTE: E-TM3.1, T20_{Guard}, Port A:

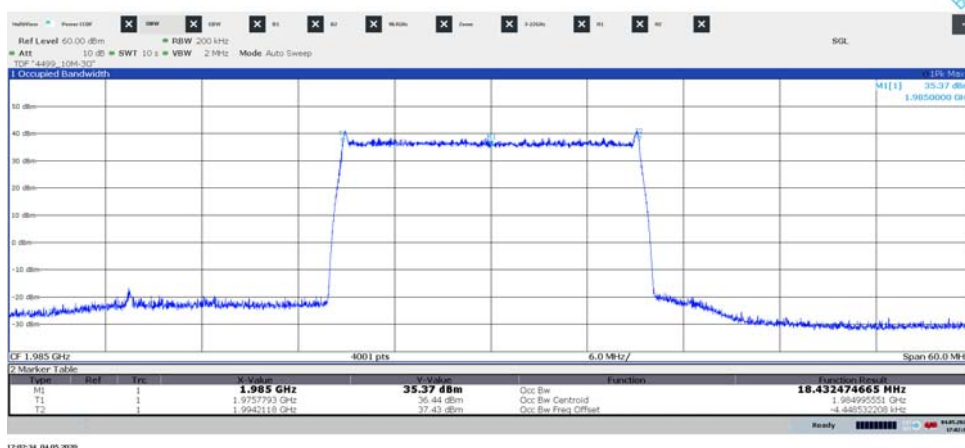


Diagram 1.43, NB IoT SA: N-TM, LTE: E-TM1.1, M_{IoT+L} , Port A:

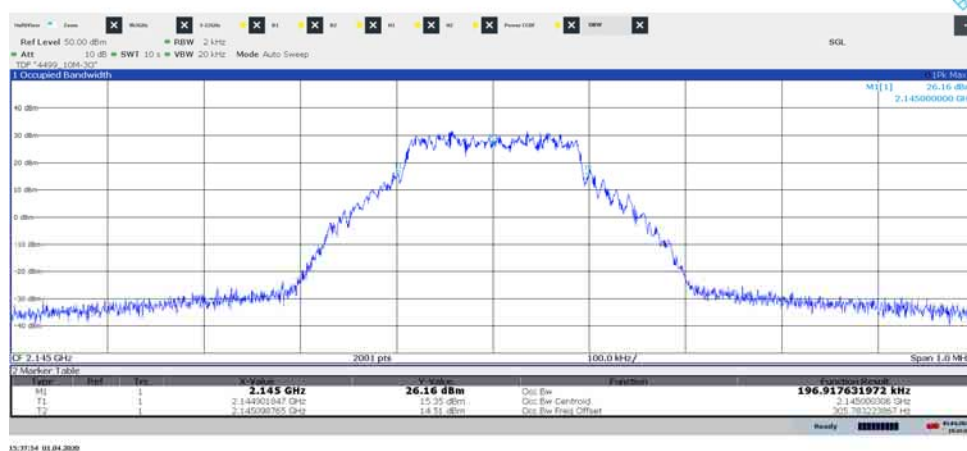


Diagram 1.44, NB IoT SA: N-TM, LTE: E-TM1.1, M_{IoT+L} , Port B:

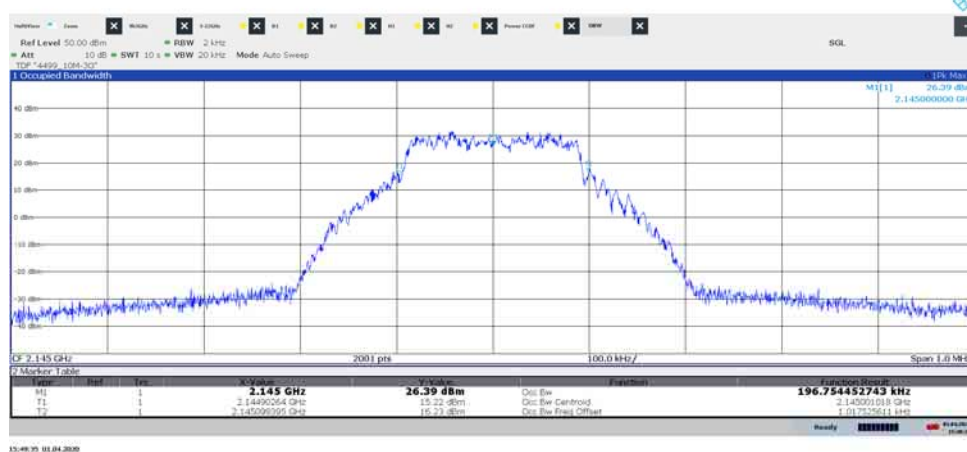


Diagram 1.45, NB IoT SA: N-TM, LTE: E-TM1.1, M_{IoT+L} , Port C:

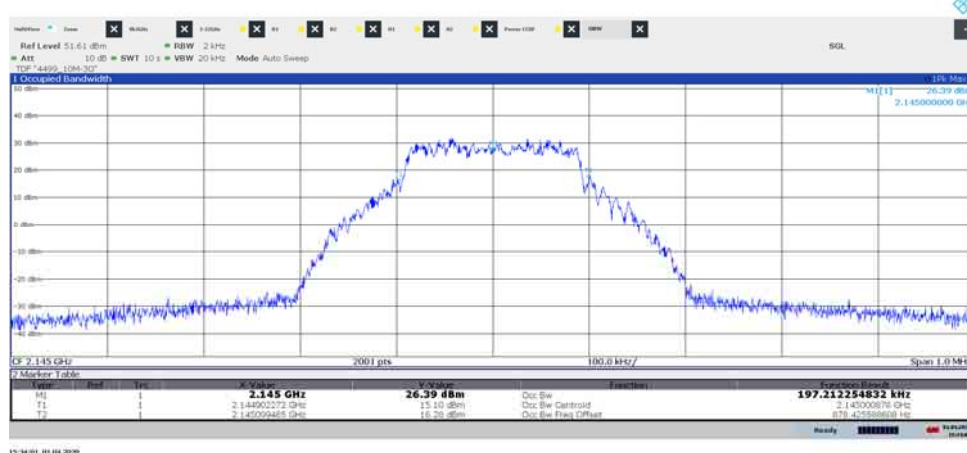


Diagram 1.46, NB IoT SA: N-TM, LTE: E-TM1.1, M_{IoT+L}, Port D:

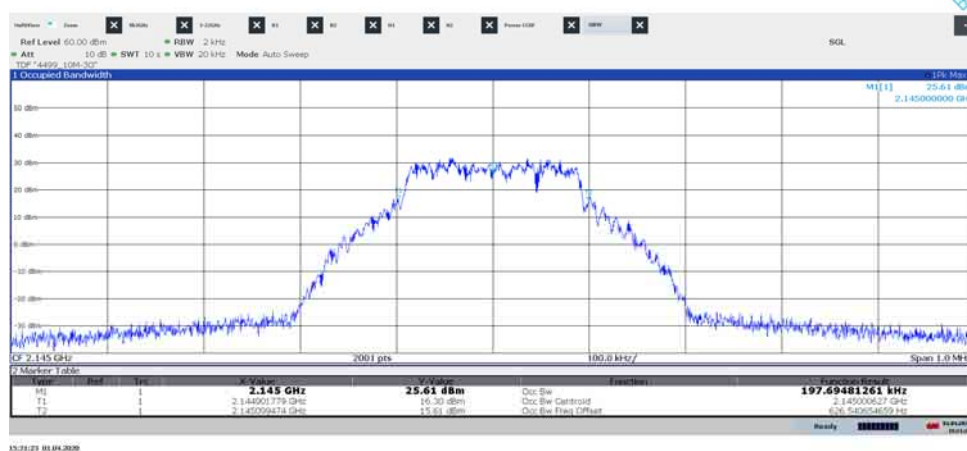


Diagram 1.47, NB IoT GB: N-TM, LTE: E-TM3.1, B10_{Guard}, Port B:

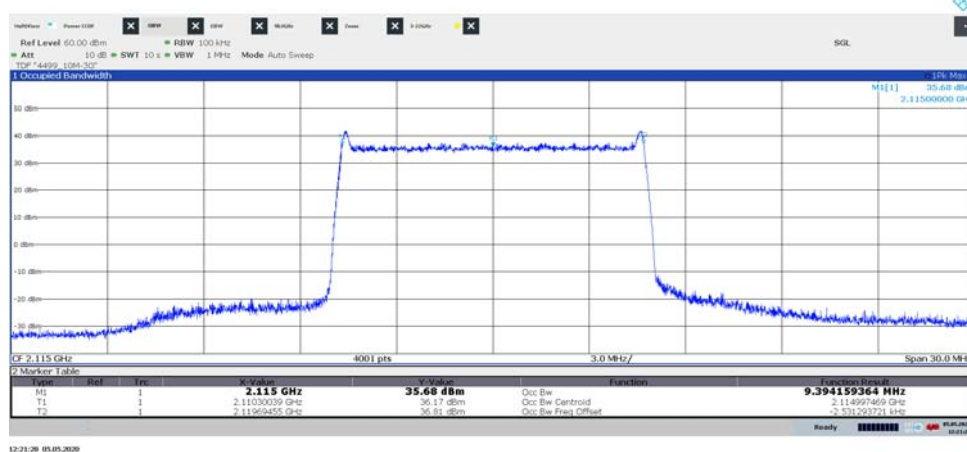


Diagram 1.48, NB IoT GB: N-TM, LTE: E-TM3.1, B15_{Guard}, Port B:

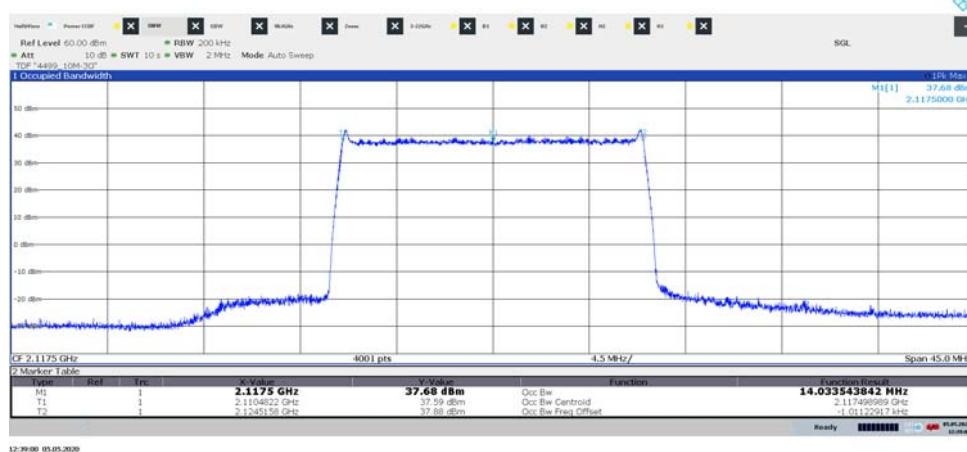


Diagram 1.49, NB IoT GB: N-TM, LTE: E-TM3.1, B20_{Guard}, Port B:

