



Rapport utfärdad av ackrediterat provningslaboratorium
Test report issued by an Accredited Testing Laboratory

Ackred. Nr 1761
 Provning
 ISO/IEC 17025

EMF Test Report: Ericsson AIR 5322 B261 (FCC)

Document number:	GFTL-20:000663 Uen Rev D	Date of report:	2020-10-06 Replaces GFTL-20:000663 Uen Rev C.
Testing laboratory:	Ericsson EMF Research Laboratory Ericsson AB Torshamnsgatan 20 164 80 Stockholm Sweden	Company/Client:	Shigeru Kawabata Ericsson AB Mobilvägen 12 22 362, Lund Sweden
Tests performed by:	Bo Xu	Dates of tests:	2020-10-06 (Rev D)
Manufacturer and market name(s) of device:	Ericsson AIR 5322 B261		
Testing has been performed in accordance with:	FCC OET Bulletin 65 IEC 62232:2017		
Test results:	RF exposure compliance boundaries (exclusion zones) related to the limits in FCC 47 CFR 1.1310 to be included in the Customer Product Information (CPI) for Ericsson AIR 5322 B261.		
Additional information:			
Signature:	Test Engineer 	Laboratory and Quality Manager 	
	Bo Xu Senior Researcher bo.xu@ericsson.com Tel: +46 72 593 13 84	Christer Törnevik Senior Expert – EMF and Health christer.tornevik@ericsson.com Tel: +46 70 586 31 48	

Summary of EMF Test Report¹

Equipment under test (EUT)

Product name	AIR 5322 B261		
Product number	KRD 901 100/2, KRD 901 100/5		
Supported bands, Tx frequency range (GHz) and standards	B261	27.5–28.35	NR
Duplexing technology and fraction of downlink transmission time to total time	TDD (75 %)		
Exposure environment	General public/uncontrolled, Workers/controlled		

Results

RF exposure compliance boundaries, outside of which the exposure is below the general public (GP) and workers (W) exposure limits, are listed below.

¹ This and pages contain a summary of the test results. The full report provides a complete description of all test details and results.

Dimensions of the box-shaped compliance boundary for general public (GP) and workers (W) exposure for AIR 5322 applicable in the USA and markets employing the FCC RF exposure limits for total output power with power tolerance and TDD downlink duty cycle included.

Mode and output power for AIR 5322									Dimensions of the box-shaped compliance boundary (m)										
									Distance in front of EUT		Width		Height		Distance behind EUT				
Band	Standard	Config Mode ²	Nominal total output power (W)	Nominal total EIRP (dBm)	IEC 62232 installation class [4]	Power tolerance (dB)	TDD DL duty cycle	Sector shapes	GP	W	GP	W	GP	W	GP	W			
B261	NR	0	0.115	46	E100	2.4	75%	Hotspot1, Hotspot5, Macro3, Macro4	0.7	0.3	0.8	0.6	0.7	0.7	0.2	0.2			
			0.288	50				Hotspot1, Hotspot5	1.1	0.5	1.3	0.6	0.7	0.7	0.2	0.2			
			0.575	53	E+			Macro3, Macro4	1.5	0.7	1.8	0.8	0.7	0.7	0.2	0.2			
			1.148	56				Hotspot1, Hotspot5	2.1	1.0	2.5	1.2	0.9	0.7	0.2	0.2			
		1	0.115	49	E100	E+		Hotspot2, Macro3, Macro9, Macro10, Macro11	1.0	0.5	1.1	0.6	0.7	0.7	0.2	0.2			
			0.288	53				Hotspot2, Macro10	1.5	0.7	1.8	0.8	0.7	0.7	0.2	0.2			
			0.575	56	E+			Macro3, Macro9, Macro11	2.1	1.0	2.5	1.1	0.9	0.7	0.2	0.2			
			1.148	59				Hotspot2, Macro10	3.0	1.4	3.5	1.6	1.2	0.7	0.2	0.2			
		2	0.115	52	E+	E+		Macro3, Macro9, Macro11	1.4	0.6	1.6	0.7	0.7	0.7	0.2	0.2			
			0.288	56				Hotspot2	2.1	1.0	2.5	1.1	0.9	0.7	0.2	0.2			
			0.575	59				Macro5, Macro7, Macro13	3.0	1.4	3.5	1.6	1.3	0.7	0.2	0.2			
			1.148	62				Hotspot2	4.2	1.9	4.9	2.2	1.8	0.8	0.2	0.2			

For the power levels specified in the table with tolerances added, and the upward rounding of compliance boundary dimensions to the nearest decimeter, the specified results are conservative.

² Configuration Mode.

1 General information

The test results presented in this report define compliance boundaries for AIR 5322 B261. Outside of these compliance boundaries, the radio frequency (RF) exposure levels are below the limits specified by the Federal Communications Commission (FCC) [1]. The tests were performed by calculations in accordance with the Ericsson RF exposure calculation procedure for base stations [2], which is in conformity with the FCC OET Bulletin 65 [3] and IEC 62232:2017 [4].

It should be noted that the test results presented in this test report are valid for the frequency range specified in Table 1, for the antenna properties specified in Table 2, and for the power levels, the power tolerance and the TDD downlink duty cycle specified in Table 3. These data as well as the applied antenna pattern files were supplied by the client and may affect the validity of the results.

Proposed EMF health and safety information for inclusion in the Customer Product Information (CPI) is provided in Appendices A, B and C.

2 Equipment under test

Table 1 and Table 2 below summarize the technical data for the equipment under test (EUT) and the properties of the integrated antenna. Table 3 lists the maximum nominal output power from the radio unit and the total time-averaged power including output power tolerance and TDD downlink duty cycle for Configuration Mode 0, Configuration Mode 1, and Configuration Mode 2. In Configuration Mode 0, the phased array antenna module (PAAM) of the product is divided into four parts, each containing 1×24 subarrays. In this configuration, the product can generate eight beams, one for each part and polarization. In Configuration Mode 1, the PAAM of the product is divided into two halves, each containing 2×24 subarrays. In this configuration, the product can generate four beams, one for each array half and polarization. In Configuration Mode 2, the full array, containing 4×24 subarrays, can generate two beams, one for each polarization.

The EUT related data in Tables 1-3 were supplied by the client.

Table 1 Technical data for the EUT.

Product name and product number	AIR 5322 B261		KRD 901 100/2, KRD 901 100/5
Supported bands, Tx frequency range (GHz) and standards	B261	27.5–28.35	NR
Dimensions, H × W × D (mm)	290 × 200 × 116		
Duplexing technology and fraction of downlink transmission time to total time	TDD (75 %)		
Exposure environment	General public/uncontrolled, Workers/controlled		
IEC 62232 installation class [4]	E100 (for configurations with nominal total EIRP \leq 50 dBm) E+ (for configurations with nominal total EIRP $>$ 50 dBm)		

Table 2 Properties of the integrated antenna.

Type	Phased Array Antenna Module (PAAM)
Number of antenna panels	4 (Configuration Mode 0) 2 (Configuration Mode 1) 1 (Configuration Mode 2)
Nominal maximum gain (dBi)	25.6 (Configuration Mode 0) 28.6 (Configuration Mode 1) 31.6 (Configuration Mode 2)
Horizontal HPBW³ (degrees)	4.1
Vertical HPBW³ (degrees)	20.9 (Configuration Mode 0) 10.4 (Configuration Mode 1) 5.2 (Configuration Mode 2)
Number of antenna elements (N_H, N_V) per antenna panel	(24, 4) (2 polarizations) for Configuration Mode 0 (24, 8) (2 polarizations) for Configuration Mode 1 (24, 16) (2 polarizations) for Configuration Mode 2
Element separation distance (Δ_H, Δ_V) (mm)	(5.288, 6.406)
Maximum scan range in horizontal plane (degrees)	±60
Maximum scan range in vertical plane (degrees)	±15

³ The stated half-power beam widths are for broadside beam.

Table 3 EUT configurations with nominal output power levels and the total time-averaged power levels including an output power tolerance and TDD downlink duty cycle.

Band	Standard	Config Mode ²	Nominal total EIRP (dBm)	Nominal total output power (dBm/W)	TDD downlink duty cycle	Power tolerance (dB)	Total time-averaged output power (dBm/W)
B261	NR	0	46	20.6/0.115	75 %	2.4	21.8/0.150
			47	21.6/0.145			22.8/0.189
			48	22.6/0.182			23.8/0.237
			49	23.6/0.229			24.8/0.299
			50	24.6/0.288			25.8/0.375
			51	25.6/0.363			26.8/0.473
			52	26.6/0.457			27.8/0.596
			53	27.6/0.575			28.8/0.749
			54	28.6/0.724			29.8/0.944
			55	29.6/0.912			30.8/1.189
			56	30.6/1.148			31.8/1.496
		1	49	20.6/0.115			21.8/0.150
			50	21.6/0.145			22.8/0.189
			51	22.6/0.182			23.8/0.237
			52	23.6/0.229			24.8/0.299
			53	24.6/0.288			25.8/0.375
			54	25.6/0.363			26.8/0.473
			55	26.6/0.457			27.8/0.596
			56	27.6/0.575			28.8/0.749
			57	28.6/0.724			29.8/0.944
			58	29.6/0.912			30.8/1.189
			59	30.6/1.148			31.8/1.496
		2	52	20.6/0.115			21.8/0.150
			53	21.6/0.145			22.8/0.189
			54	22.6/0.182			23.8/0.237
			55	23.6/0.229			24.8/0.299
			56	24.6/0.288			25.8/0.375
			57	25.6/0.363			26.8/0.473
			58	26.6/0.457			27.8/0.596
			59	27.6/0.575			28.8/0.749
			60	28.6/0.724			29.8/0.944
			61	29.6/0.912			30.8/1.189
			62	30.6/1.148			31.8/1.496

3 Exposure conditions

The EUT is intended to be installed on walls, poles and similar structures making it possible to ensure that the general public has no access to the EMF compliance boundary. Other installation related exposure conditions are not reasonably foreseeable for the EUT.

The maximum TDD downlink duty cycle was considered to obtain the maximum time-averaged power delivered to the antenna.

Different factors, such as beam scanning in elevation and azimuth, RBS utilization, and scheduling time are reasonably foreseeable and will significantly reduce the time-averaged power and the RF exposure. These factors were, however, not considered in this assessment, which adds to the conservativeness of the obtained compliance boundaries.

4 EMF compliance boundary calculations

The RF exposure was evaluated using calculations performed according to the Ericsson RF Exposure Calculation Procedure for Base Stations [2], which conforms to FCC OET Bulletin 65 [3] and IEC 62232 [4]. The calculations were made using the far-field spherical formula. The first step in calculating the compliance boundary was to use the spherical far-field formula to estimate power density:

$$S_{\text{sph}}(\theta, \phi) = \frac{P_a G(\theta, \phi)}{4\pi r^2},$$

where S , P_a , G , r , θ , and ϕ denote the power density, the total time-averaged power accepted by antenna, the antenna gain, the distance from the antenna, and the angular variables in a spherical coordinate system, respectively. The total time-averaged power delivered to the antenna include tolerances and the TDD downlink duty cycle. The envelope of antenna gains for all possible traffic beams was obtained from far-field measurements provided by the client. Such envelope patterns were provided for two different frequencies, specifically 27.7 GHz and 28 GHz within Band 261.

There are different available coverage shapes of the beam envelope pattern depending on deployment scenarios (Hotspot1, Hotspot5, Macro 3, and Macro 4 for Configuration Mode 0; Hotspot2, Macro3, Macro9, Macro10, and Macro11 for Configuration Mode 1; Hotspot2, Macro5, Macro7, and Macro13 for Configuration Mode 2). Maximum gain values, corresponding to the envelope patterns, were used in the above equation to estimate power density for each sector shape. The maximum gain values of the antenna considering all possible scan directions and sector shapes were found to be 25.5 dBi, 28.6 dBi, and 31.5 dBi for Configuration Mode 0, Configuration Mode 1, and Configuration Mode 2, respectively, which is close to the nominal gain values provided in Table 2.

The compliance distance for the spherical model, $CD_{\text{sph}}(\theta, \phi)$ was obtained for each sector shape by solving the following equation for r :

$$\frac{S_{\text{sph}}(r, \theta, \phi)}{S_{\text{gp,w}}^{\text{lim}}} = 1,$$

where $S_{\text{gp,w}}^{\text{lim}}$ denotes the FCC power density limits for general public/uncontrolled and workers/controlled exposure. RF EMF exposure limits are given in Table 4.

Table 4 RF EMF exposure limits applicable for the frequency range used by the EUT [1].

Band	$S_{\text{gp}}^{\text{lim}}$ (W/m ²)	$S_{\text{w}}^{\text{lim}}$ (W/m ²)
B261	10	50

Based on the calculated compliance distances, a box-shaped compliance boundary was determined. To comply with the FCC requirement of a minimum test separation distance for a non-portable device of 20 cm, the minimum distance from the EUT to the compliance boundary was set to 20 cm.

5 Results

A box-shaped compliance boundary is used, characterized by its width, height, and the compliance distances behind and in front of the EUT, see Figure 1. Outside of this box, the RF exposure is below the exposure limits.

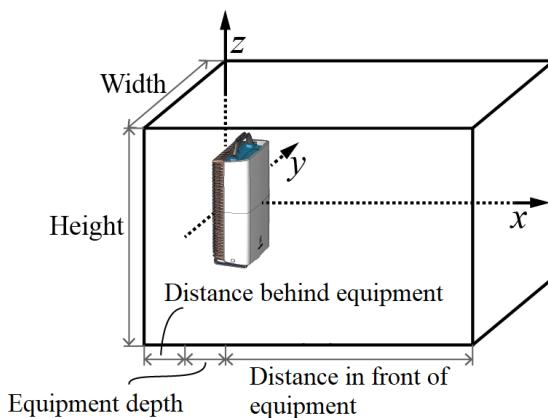


Figure 1 Box-shaped structure specifying the compliance boundary for the tested RBS product.

In Figure 2 through Figure 14, compliance distance results as obtained using the far-field spherical formula for general public (blue line) and workers (red line) exposure are given for the tested configuration leading to the largest compliance boundary for each sector shape. Results are provided for the FCC exposure limits. Also shown are the resulting symmetric compliance boundaries (black lines, solid for general public, dashed for workers exposure). The resulting compliance boundary dimensions are given in Table 5 rounded upwards to the nearest decimeter.

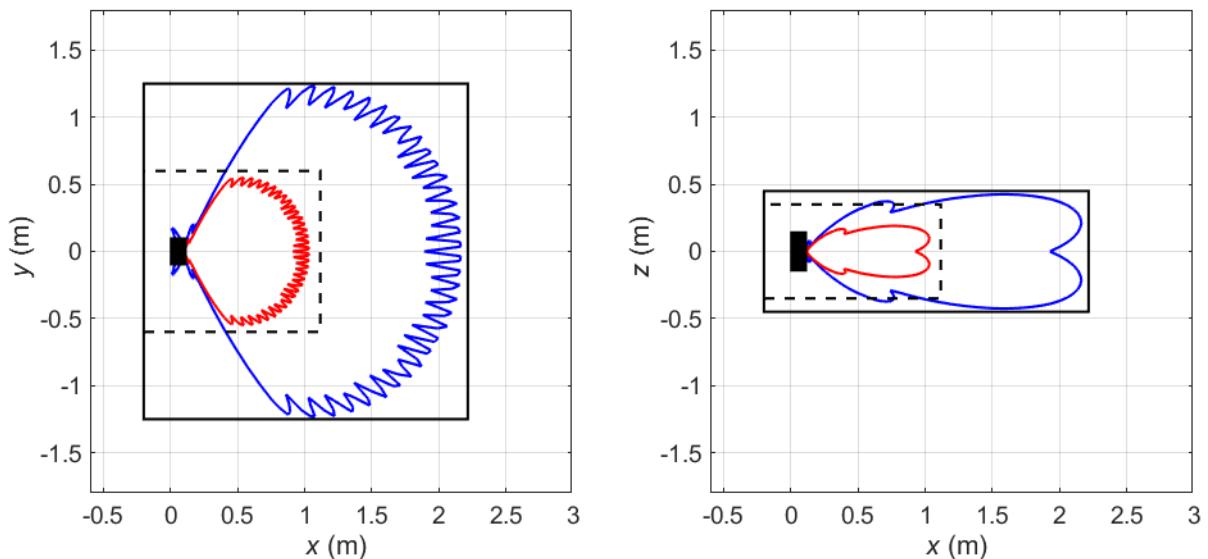


Figure 2 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Hotspot1 sector shape (Config Mode 0). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

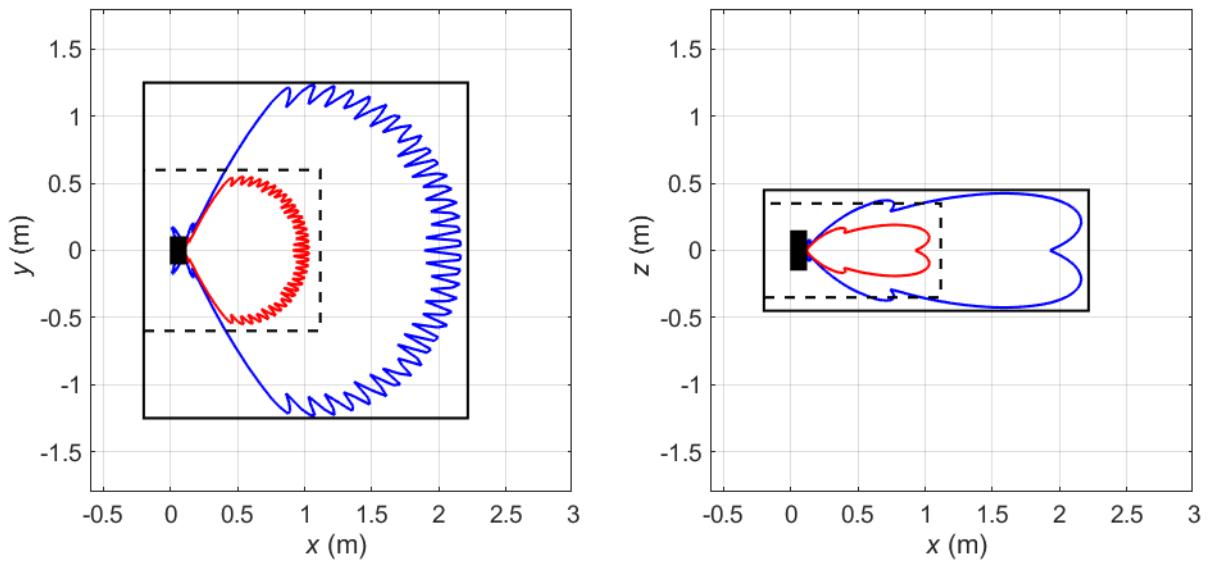


Figure 3 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Hotspot5 sector shape (Config Mode 0). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

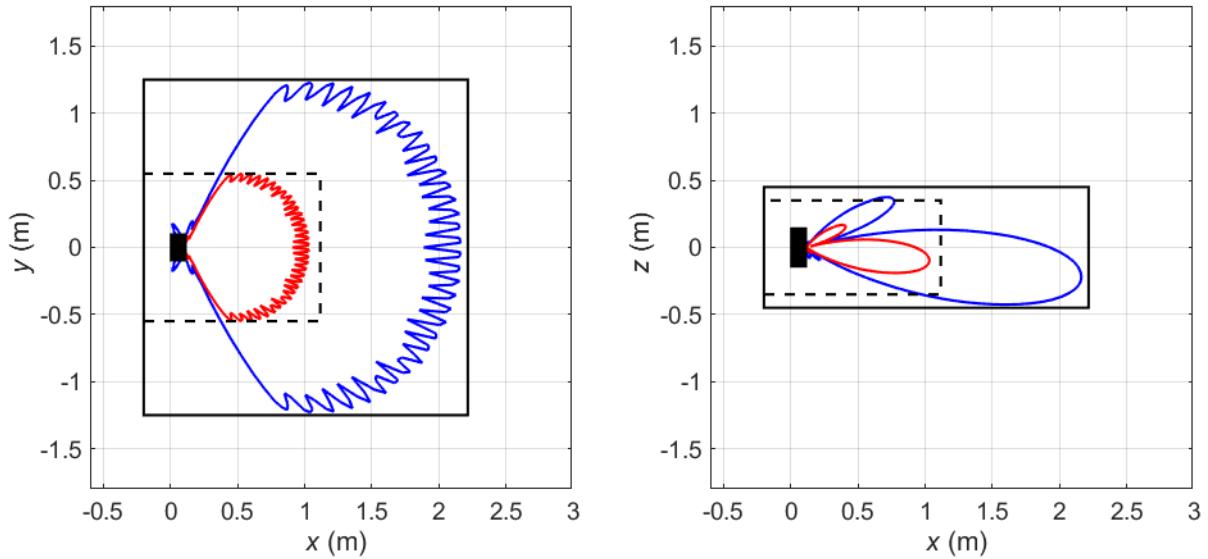


Figure 4 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro3 sector shape (Config Mode 0). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

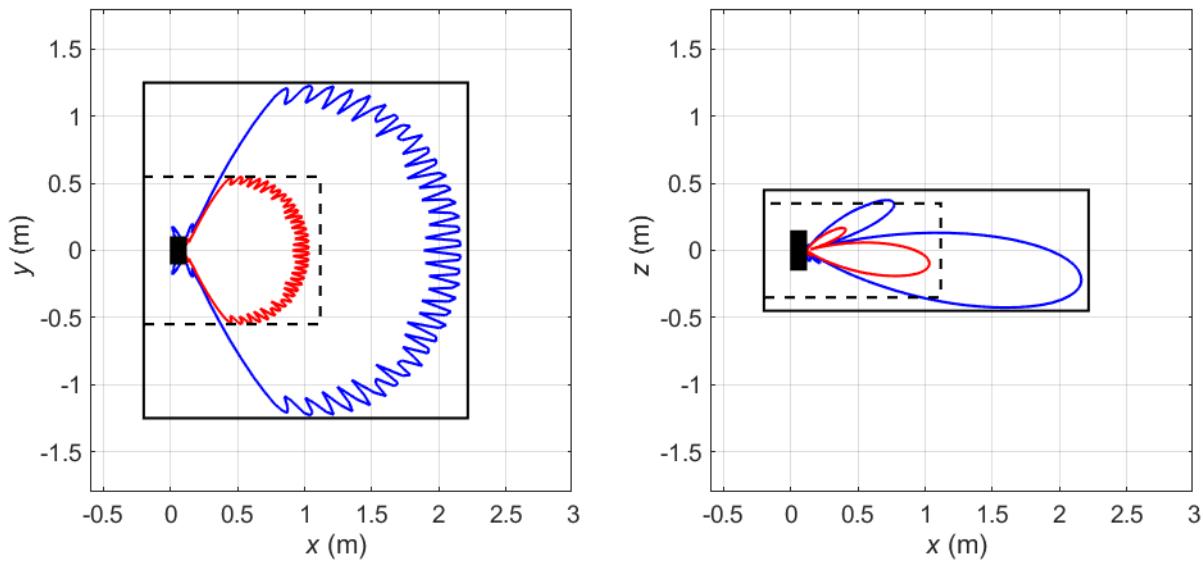


Figure 5 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro4 sector shape (Config Mode 0). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

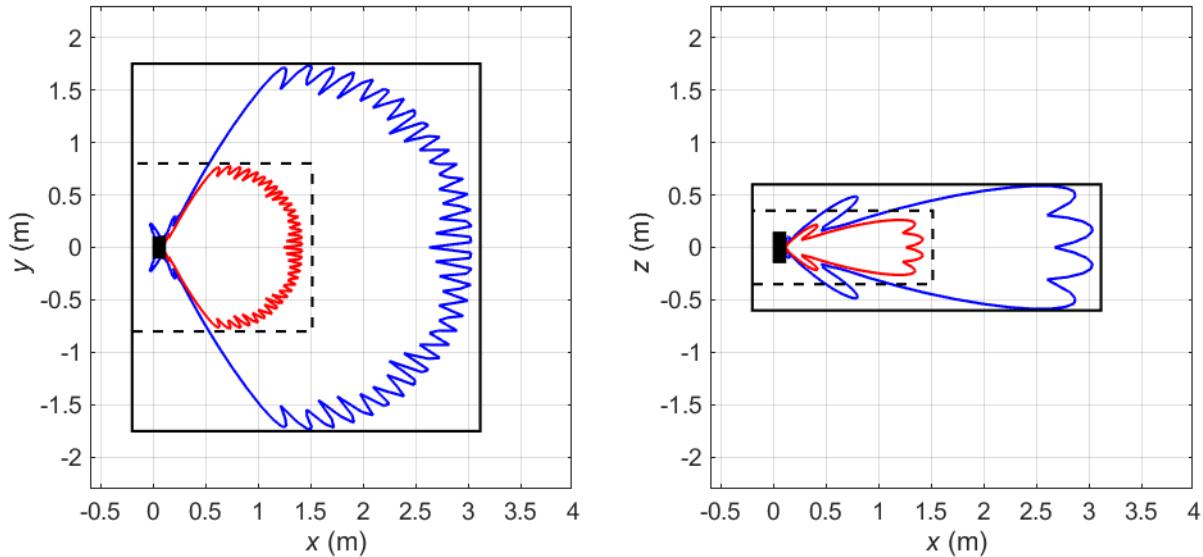


Figure 6 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Hotspot2 sector shape (Config Mode 1). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

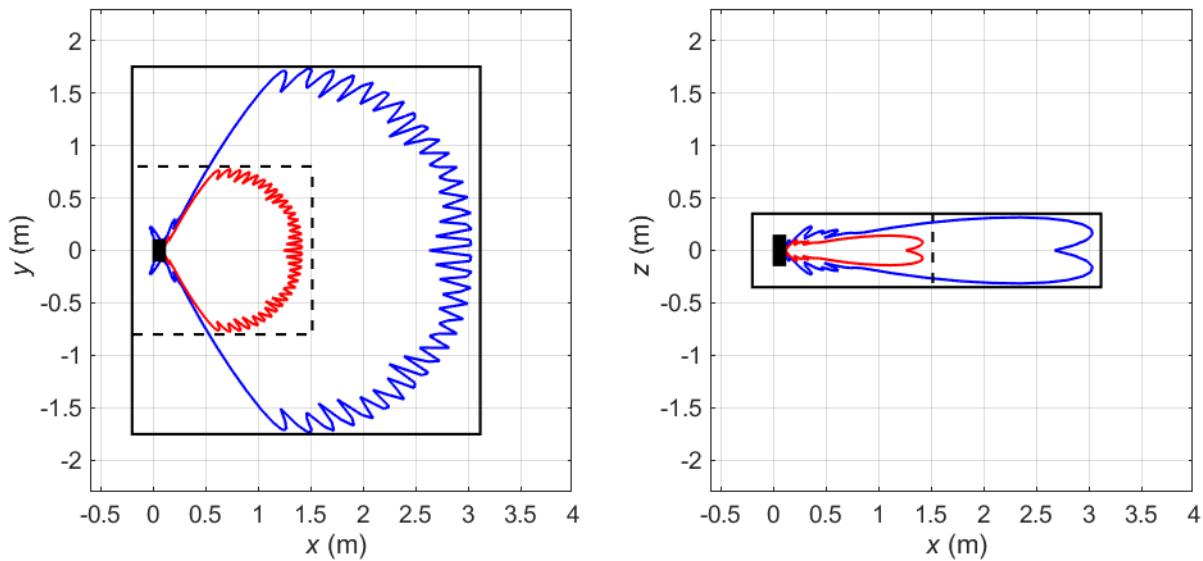


Figure 7 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro3 sector shape (Config Mode 1). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

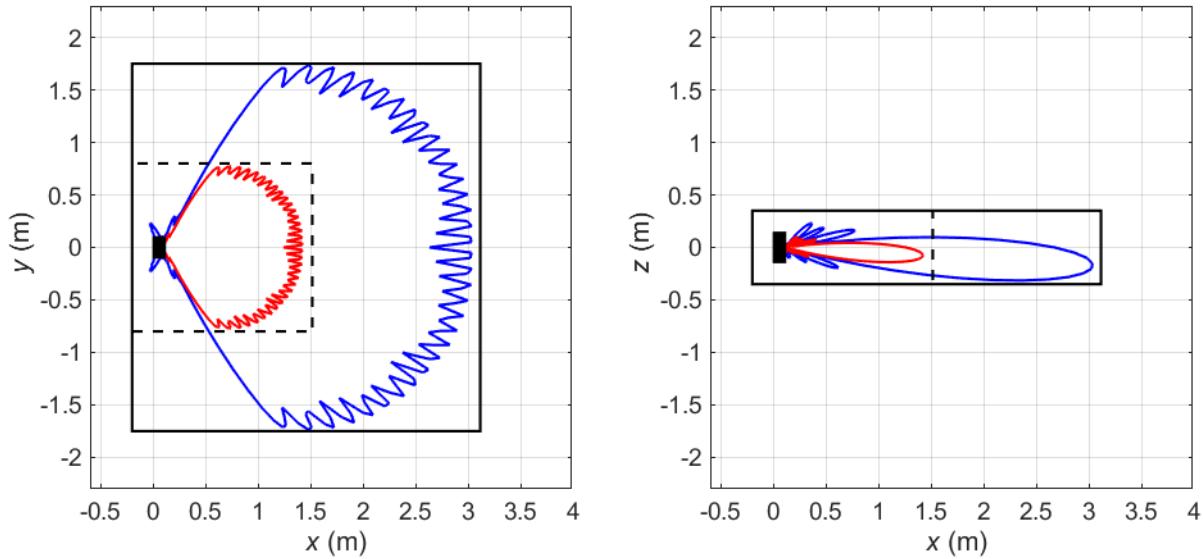


Figure 8 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro9 sector shape (Config Mode 1). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

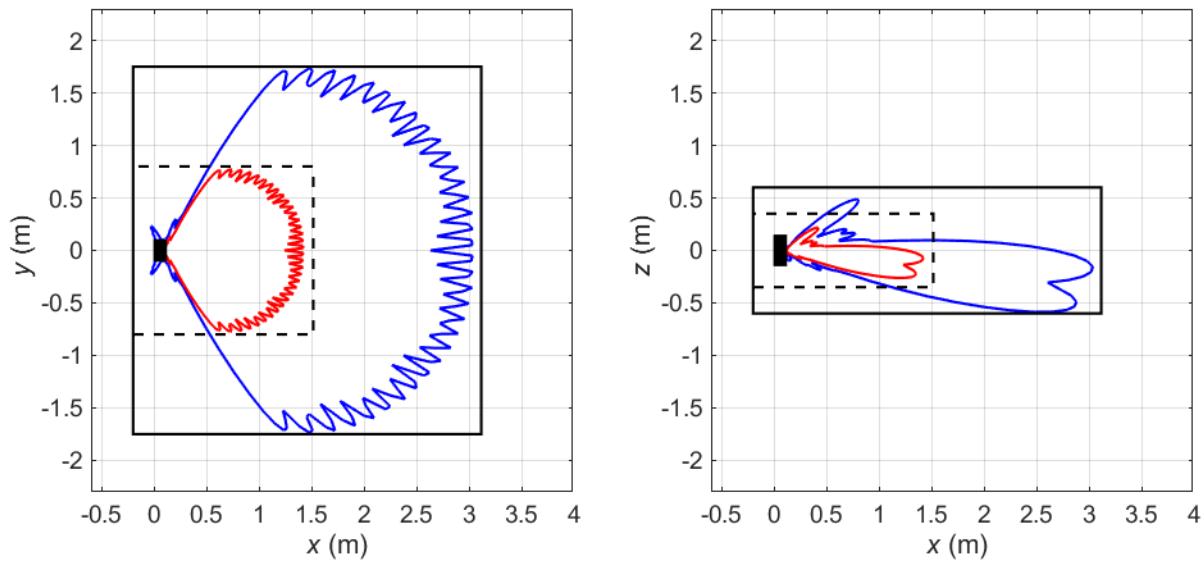


Figure 9 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro10 sector shape (Config Mode 1). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

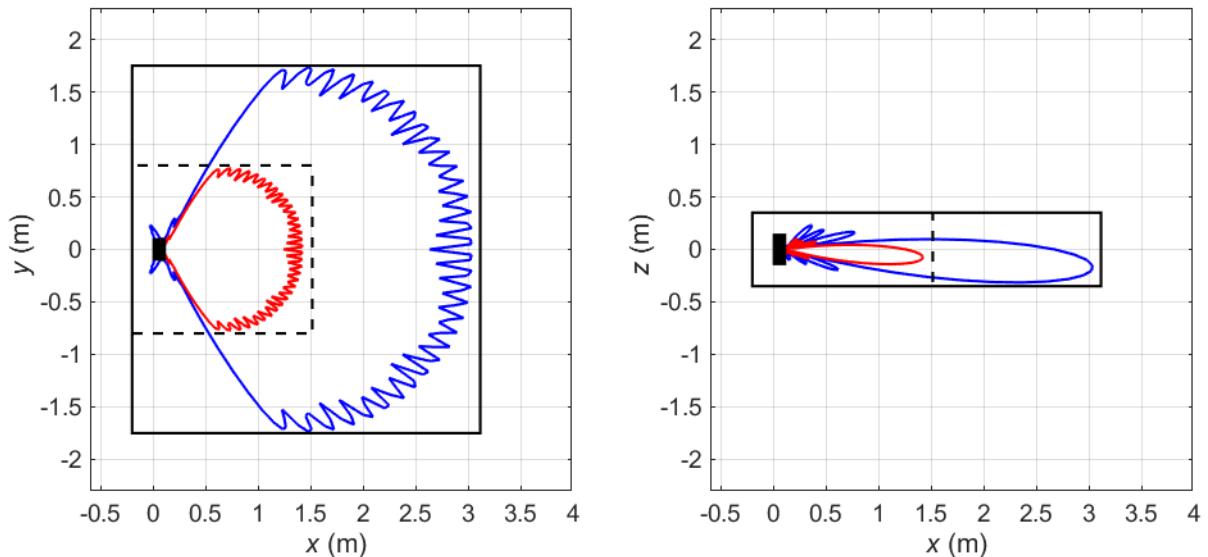


Figure 10 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro11 sector shape (Config Mode 2). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

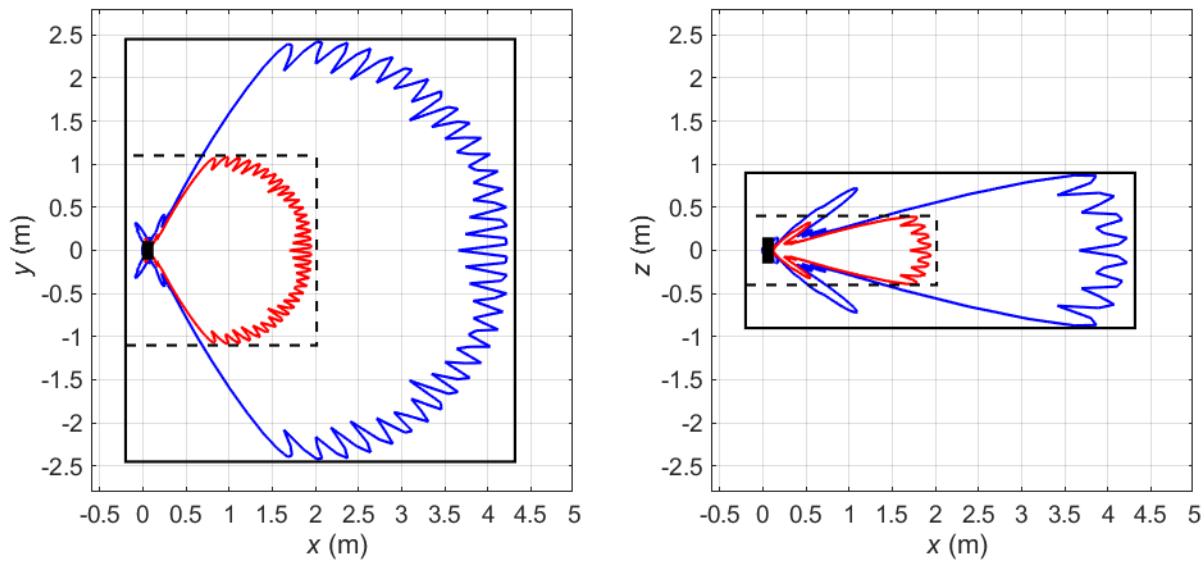


Figure 11 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Hotspot2 sector shape (Config Mode 2). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

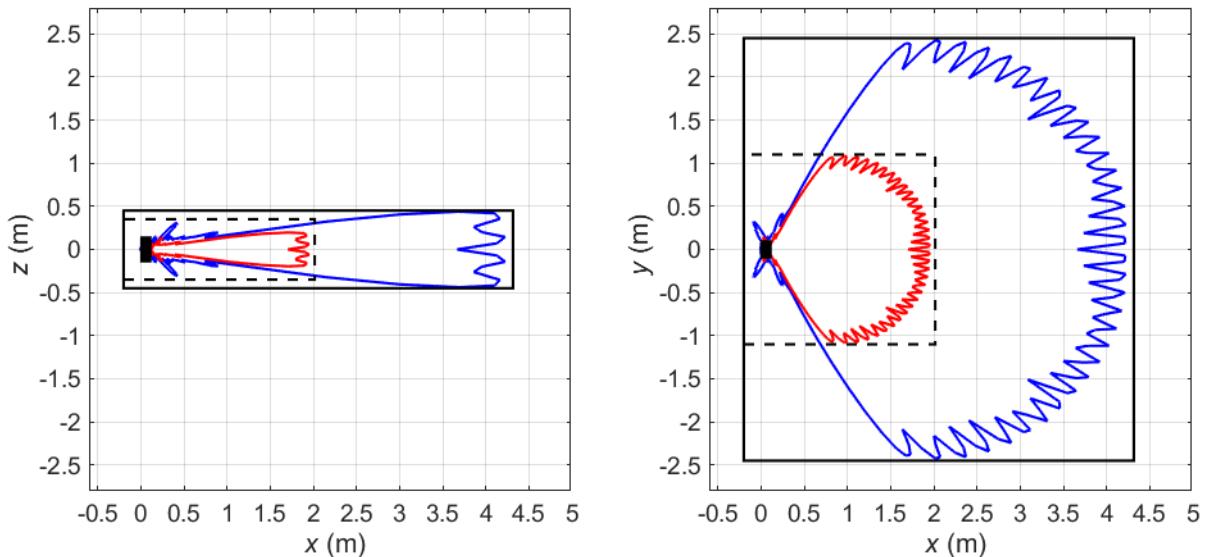


Figure 12 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro5 sector shape (Config Mode 2). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

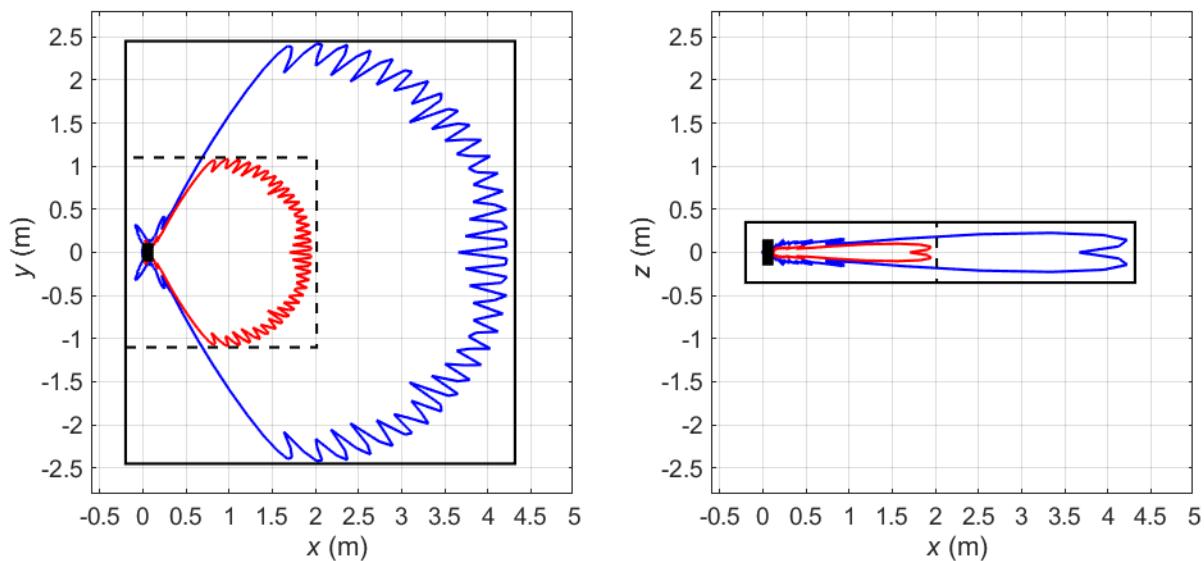


Figure 13 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro7 sector shape (Config Mode 2). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

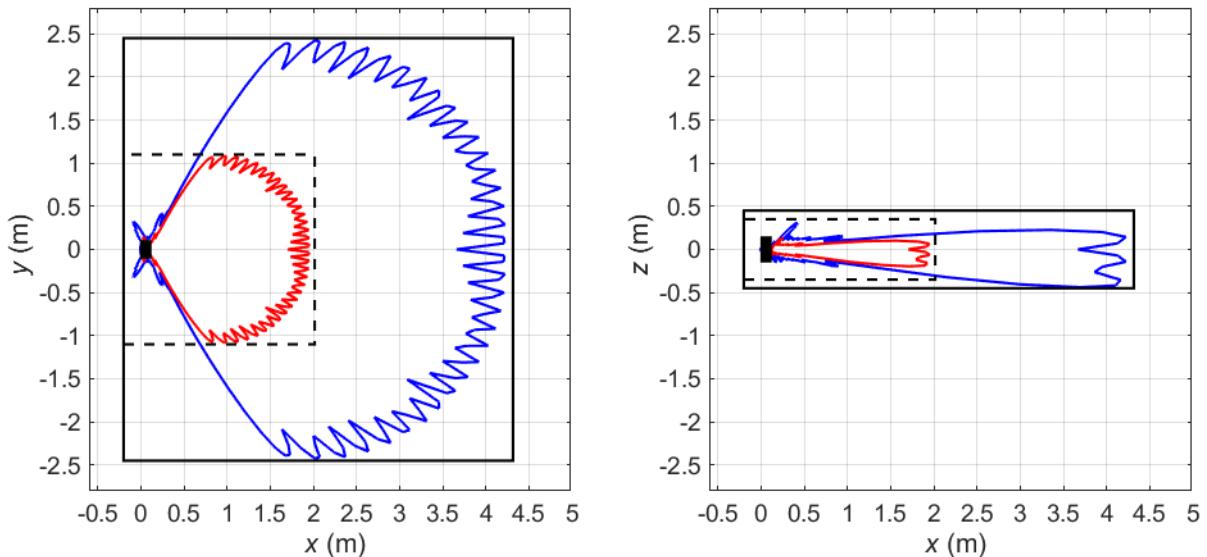


Figure 14 Compliance boundaries for general public (black solid line) and workers (black dashed line) exposure for the USA and markets where the FCC exposure limits apply for Macro13 sector shape (Config Mode 2). The blue solid lines correspond to compliance distance results for general public exposure obtained using the spherical model. The solid red lines indicate the corresponding compliance distance results for workers exposure. The EUT is shown from above (left) and from the side (right) with its backplane located at $x = 0$ m. Mode: B261 (28 GHz) (NR). Total power delivered to the antenna: 1.496 W.

Table 5 Dimensions of the box-shaped compliance boundary for general public (GP) and workers (W) exposure for AIR 5322 applicable in the USA and markets employing the FCC RF exposure limits for total output power with power tolerance and TDD downlink duty cycle included.

Mode and output power for AIR 5322									Dimensions of the box-shaped compliance boundary (m)									
									Distance in front of EUT		Width		Height		Distance behind EUT			
Band	Standard	Config Mode ²	Nominal total output power (W)	Nominal total EIRP (dBm)	IEC 62232 installation class [4]	Power tolerance (dB)	TDD DL duty cycle	Sector shapes	GP	W	GP	W	GP	W	GP	W		
B261	NR	0	0.115	46	E100	2.4	75%	Hotspot1, Hotspot5, Macro3, Macro4	0.7	0.3	0.8	0.6	0.7	0.7	0.2	0.2		
			0.288	50				Hotspot1, Hotspot5	1.1	0.5	1.3	0.6	0.7	0.7	0.2	0.2		
			0.575	53				Macro3, Macro4	1.5	0.7	1.8	0.8	0.7	0.7	0.2	0.2		
			1.148	56	E+			Hotspot1, Hotspot5	2.1	1.0	2.5	1.2	0.9	0.7	0.2	0.2		
		1	0.115	49				Macro3, Macro4				1.1						
			0.288	53				Hotspot2, Macro3, Macro9, Macro10, Macro11	1.0	0.5	1.1	0.6	0.7	0.7	0.2	0.2		
			0.575	56				Hotspot2, Macro10	1.5	0.7	1.8	0.8	0.7	0.7	0.2	0.2		
			1.148	59				Macro3, Macro9, Macro11				1.1	0.9	0.7	0.2	0.2		
		2	0.115	52	E+			Hotspot2, Macro10	2.1	1.0	2.5	1.1						
			0.288	56				Macro3, Macro9, Macro11				1.1	0.7	0.7	0.2	0.2		
			0.575	59				Hotspot2, Macro13	3.0	1.4	3.5	1.6	1.2					
			1.148	62				Macro3, Macro9, Macro13				1.6	0.7	0.7	0.2	0.2		
		2	0.115	52	E+			Hotspot2, Macro5, Macro7, Macro13	1.4	0.6	1.6	0.7	0.7	0.7	0.2	0.2		
			0.288	56				Hotspot2	2.1	1.0	2.5	1.1	0.9					
			0.575	59				Macro5, Macro7, Macro13				1.1	0.7	0.7	0.2	0.2		
			1.148	62				Hotspot2	3.0	1.4	3.5	1.6	1.3					
		2	0.115	52	E+			Macro5, Macro7, Macro13				1.6	0.7	0.7	0.2	0.2		
			0.288	56				Hotspot2	4.2	1.9	4.9	2.2	1.8	0.8				
			0.575	59				Macro5, Macro13				2.2	0.9	0.9	0.2	0.2		
			1.148	62				Macro7				0.7	0.7	0.7	0.2	0.2		

For the power levels specified in the table with tolerances added, and the upward rounding of compliance boundary dimensions to the nearest decimeter, the specified results are conservative.

6 Uncertainty

For the input parameters defined in the test report, the calculated compliance boundary dimensions determined according the approach described in Section 4 results in an exposure assessment which is conservative. The compliance boundary dimensions were determined by comparing the evaluated RF exposure directly with the limits.

7 Conclusion

The Ericsson AIR 5322 B261 has been tested using methods and procedures specified in FCC OET Bulletin 65 [3] and IEC 62232:2017 [4]. The results in Section 5 show the compliance boundary dimensions for the considered configuration of the product. Outside of these compliance boundaries, the RF exposure is below the limits specified in [1].

8 References

- [1] FCC, Code of Federal Regulations CFR title 47, part 1.1310 "Radiofrequency radiation exposure limits", Federal Communications Commission (FCC), August 1997.
- [2] Ericsson, GFTE-16:001718 Uen, "Ericsson RF exposure calculation procedure for base stations".
- [3] FCC, "Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields. OET Bulletin 65. Edition 97-01." Federal Communications Commission (FCC), Office of Engineering and Technology, August 1997.
- [4] IEC 62232:2017, Determination of RF field strength, power density and SAR in the vicinity of radiocommunication base stations for the purpose of evaluating human exposure, June 2017.
- [5] Ericsson, LME-12:001904 Uen, "Exposure to radio frequency electromagnetic fields".

9 Revision history

Rev.	Date	Description
A	2020-05-27	First revision
B	2020-05-27	Corrected IEC 62232 installation class in Table A.1. Made some editorial changes.
C	2020-09-17	Updated with some editorial corrections to address comments from FCC TCB. Corrected the width of the box-shaped compliance boundary from 0.7 m to 0.6 m for workers exposure due the software bug for Configuration Mode 0 with 46 dBm nominal total EIRP, Configuration Mode 0 with 50 dBm nominal total EIRP, Configuration Mode 1 with 49 dBm nominal total EIRP, and Configuration Mode 2 with 52 dBm nominal total EIRP.
D	2020-10-06	Corrected a typo in Table 2 and updated test results by changing power tolerance from 1.5 dB to 2.4 dB according the request from the client.

Appendix A. Information to be included in the CPI

Table A.1 lists the compliance boundaries (exclusion zones), outside of which the RF EMF exposure from AIR 5322 is below the limits applicable in:

- USA (47 CFR 1.1310)

Information is provided for the theoretical maximum exposure condition.

Table A.1 Dimensions of the box-shaped compliance boundary for general public (GP) and occupational (O) exposure applicable in USA and markets employing the FCC RF exposure limits.

Mode and output power for AIR 5322								Dimensions of the box-shaped compliance boundary (m)											
								Distance in front of AIR		Width		Height		Distance behind AIR					
Band	Standard	Configuration Mode	Nominal total EIRP (dBm)	IEC 62232 installation class [4]	Power tolerance (dB)	TDD DL duty cycle	Sector shapes	GP	O	GP	O	GP	O	GP	O				
B261	NR	0	46	E100	75%	2.4	Hotspot1, Hotspot5, Macro3, Macro4	0.7	0.3	0.8	0.6	0.7	0.7	0.2	0.2				
			50					1.1	0.5	1.3	0.6	0.7	0.7	0.2	0.2				
			53	E+				1.5	0.7	1.8	0.8	0.7	0.7	0.2	0.2				
			56					Hotspot1, Hotspot5	2.1	1.0	2.5	1.2	0.9	0.7	0.2	0.2			
		1	49	E100			Macro3, Macro4	1.0	0.5	1.1	0.6	0.7	0.7	0.2	0.2				
			53	E+				Hotspot2, Macro3, Macro9, Macro10, Macro11	1.5	0.7	1.8	0.8	0.7	0.7	0.2	0.2			
			56					Hotspot2, Macro10	2.1	1.0	2.5	1.1	0.9	0.7	0.2	0.2			
			59					Macro3, Macro9, Macro11	3.0	1.4	3.5	1.6	1.2	0.7	0.2	0.2			
		2	52	E+	4.2	2.2	Hotspot2, Macro5, Macro7, Macro13	1.4	0.6	1.6	0.7	0.7	0.7	0.2	0.2				
			56					Hotspot2	2.1	1.0	2.5	1.1	0.9	0.7	0.2	0.2			
			59					Macro5, Macro7, Macro13	3.0	1.4	3.5	1.6	1.3	0.7	0.2	0.2			
			62					Hotspot2	4.2	1.9	4.9	2.2	1.8	0.8	0.2	0.2			

(1) The compliance boundaries are determined for total output power with power tolerance and TDD downlink duty cycle included.

Appendix B. Guidelines on how to install the product

The Ericsson AIR 5322 B261 product (KRD 901 100/2, KRD 901 100/5) shall be installed to make sure that the general public does not have access to the applicable RF EMF compliance boundary. The compliance boundary dimensions were determined for the product transmitting in free space.

Appendix C. Guidelines for workers during installation, maintenance, and repair of the product

For Ericsson AIR 5322 B261 product (KRD 901 100/2, KRD 901 100/5), if work needs to be performed within the compliance boundary applicable for workers, the radio equipment shall be powered off, or the power be reduced to a level ensuring that the RF EMF exposure is below the relevant exposure limit for workers.

If work is conducted on behalf of Ericsson, minimum EMF related requirements are provided in [5].