

Handled by, department
Reinhold Reul
Electronics
+46 10 516 55 84, reinhold.reul@sp.seDate
2008-11-11Reference
F816660-F22APage
1 (2)Ericsson AB
Att. Mats Falk
Lindholmspiren 11
417 56 Göteborg**Permissive change measurements on WCDMA 850 MHz
Transceiver unit with FCC ID: TA8AROJ1192288-1
(7 appendices)****Test object**

Transceiver unit ROJ 119 2288/1, rev. R1C, S/N: AE54000842

Appendix 1 provides information about the test object and the test set-up.
Appendix 7 provides external photos of the test object.**Summary**

This report is a justification of a Class II permissive change for the equipment grant to also comprise use of 64QAM modulation.

Standard	Compliant	Appendix
FCC CFR 47		
2.1046 RF power output	Yes	2
2.1049 Occupied bandwidth	Yes	3
2.1051 Band edge	Yes	4
2.1051 Spurious emission at antenna terminals	Yes	5
2.1053 Field strength of spurious radiation	Yes	6

**SP Technical Research Institute of Sweden
Electronics – EMC**

 Bengt Andersson
Deputy Technical Manager


 Reinhold Reul
Technical Officer
SP Technical Research Institute of SwedenPostal address
SP
Box 857
SE-501 15 Borås
SWEDENOffice location
Västerås
Brinellgatan 4
SE-504 62 Borås
SWEDENPhone / Fax / E-mail
+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Purpose of test	Appendix 1
Test setups	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Photos	Appendix 7

Description – Test object

Equipment: WCDMA Transceiver unit sTRX 850 MHz

Tx Frequency range: 871.4 – 891.6 MHz

Modulations: QPSK, 16QAM and 64QAM

Maximum output power: 42.4 dBm (17.4 W) after sAIU

Nominal power voltage: -48 V DC

Tested channel

UARFCN Frequency
4357 871.4 MHz

Operation mode during measurements**Test models**

All measurements were performed with the test object transmitting with the test models 1 and 6 as defined in 3GPP TS 25.141. Test model 1 uses the QPSK modulation only, and test model 6 includes the 64QAM modulation as follows:

Test model 1 (TM1): 64 DPCCHs with at 30 ksps (SF=128) with QPSK modulation

Test model 6 (TM6): 30 DPCCHs at 30 ksps (SF=128) with QPSK modulation and
8 HS-PDSCHs at 240 ksps (SF=16) with 64QAM modulation

Conducted measurements

All RF conducted measurements were performed with the test object installed in a RBS 3303 cabinet powered with 120 VAC / 60 Hz. All measurements were done at the output connector (Ant A) of the single Antenna Interface Unit (sAIU) KRY 112 124/1. All measurements were performed at maximum output power with both Test model 1 and Test model 6.

Radiated measurements

All radiated measurements were performed with the test object installed in RBS 3303 cabinet powered with 120 VAC / 60 Hz.

The test object was activated at maximum output power (42.4 dBm). The RF output power port was via a RF attenuator connected to functional test equipment for supervision.

The test object was allocated to the following UARFCN:

Cell	1	1
Downlink	4357 (871,4 MHz)	4357 (871,4 MHz)
Uplink	4132 (826,4 MHz)	4132 (826,4 MHz)
Test model	1	6

Purpose of test

The purpose of this test is to justify a Class II permissive change of the test object to include the use of 64QAM modulation. This report verifies maintained performance characteristics of affected items according FCC CFR47 by re-testing the updated equipment with QPSK, using Test model 1, and with a combination of QPSK and 64QAM, using Test model 6.

Summary of results

Measurement results for both set-ups are near identical and Test model 1 can be considered a worst case set-up.

References

Measurements were done according to relevant parts of the following standards:

ANSI 63.4-2003
ANSI/TIA/EIA-603-B-2002
3GPP TS 25.141

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered: 2008-10-21

Manufacturer's representative


Mats Falk, Ericsson AB

Test engineers

Jörgen Wassholm, Andreas Johnson, Stefan Larsson, Jonas Bremholt and Reinhold Reul

Test witnesses

Ove Nilsson and Christer Hjorth, Ericsson AB

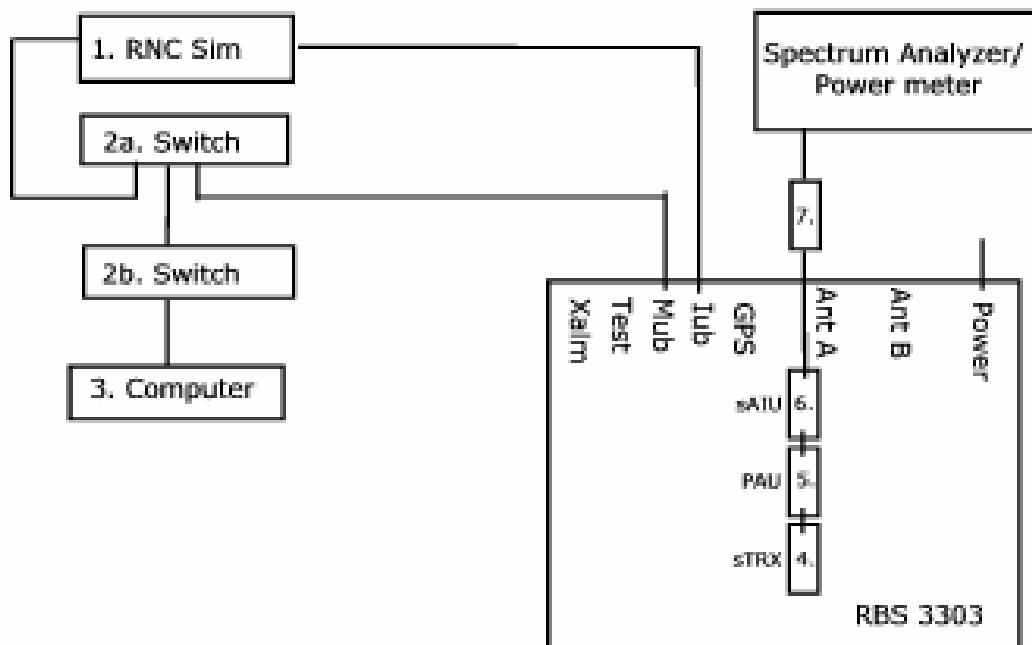Test set-up, conducted measurements


A detailed hardware list for RBS 3303 is given in document F816660-H.

Test Object

4. Transceiver unit ROJ 119 2288/1, rev. R1C, Serial No: AE54000842
(FCC ID: TA8AROJ1192288-1)

Functional test equipment

1. RNC: Mini-SIM#60 4780 DA S/N 0210 REV BAA
- 2a Switch Netgear model FS 726
- 2b Switch Netgear model FS 726
3. Computer: Sun ULTRA45, BAMS 1000655787
5. PAU KRB 901 18/1, rev. R1E, Serial No. (S)BG800000EZ
(FCC ID: TA8AKPB90118-1)
6. sAIU 850, KRY 112 124/1, rev. R1B, Serial No. A400532428
7. Attenuator

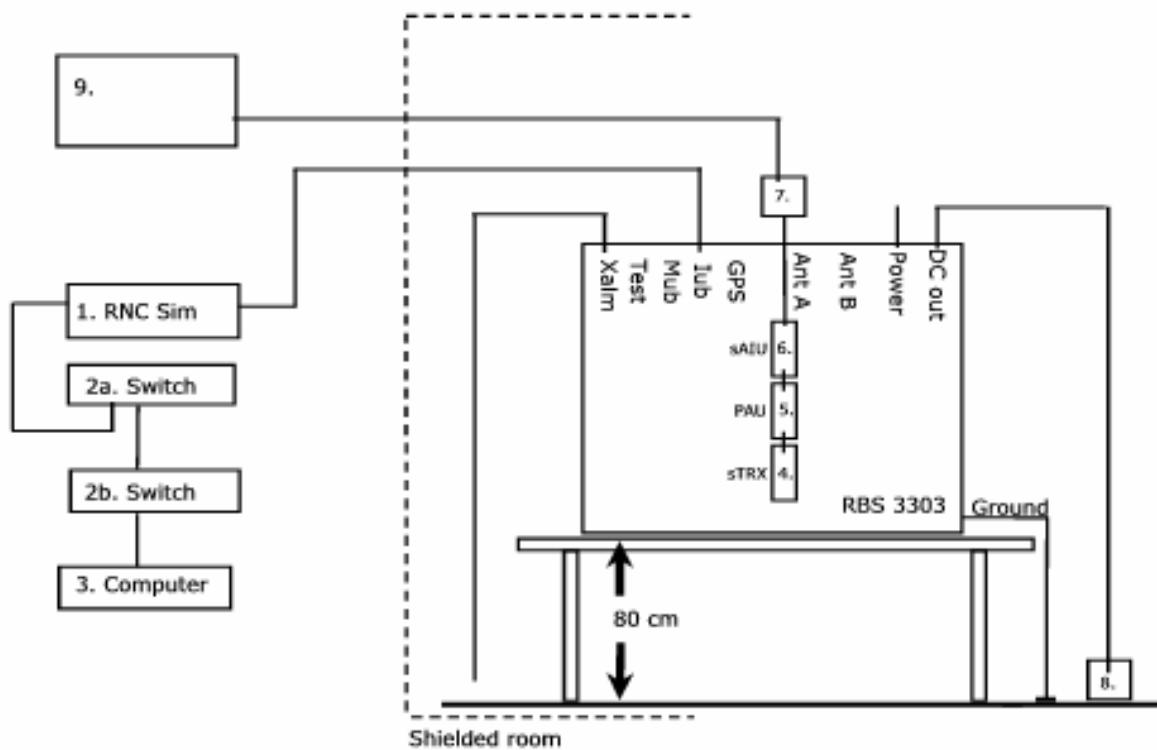Test set-up, radiated measurements

A detailed hardware list for RBS 3303 is given in document F816660-H.

Test object

4. Transceiver unit ROJ 119 2288/1, rev. R1C, Serial No: AE54000842
(FCC ID: TA8AROJ1192288-1)

Functional test equipment

- 1 RNC: Mini-SIM#60 4780 DA S/N 0210 REV BAA
- 2a Switch Netgear model FS 726
- 2b Switch Netgear model FS 726
3. Computer: Sun ULTRA45, BAMS 1000655787
5. PAU KRB 901 18/1, rev. R1E, Serial No. (S)BG800000EZ
(FCC ID: TA8AKPB90118-1)
6. sAIU 850, KRY 112 124/1, rev. R1B, Serial No. A400532428
7. Attenuator, Weinschel model 48-30-33 s/n BJ4349
8. DC load
9. Anritsu Signal Analyzer, MS2691A, SN 6200750255



FCC ID: TA8AROJ1192288-1

Appendix 2

RF power output measurements according to 47 CFR 2.1046

Date	Temperature	Humidity
2008-10-30	22 °C ± 3 °C	24 % ± 5 %

Test set-up and procedure

The output was connected to a Peak power analyzer. The transmitter was set up according to Test model 1 and Test model 6 during the measurements.

Measurement equipment	Calibration Due	SP number
Boonton RF Peak power meter/analyzer	2009-09	503 144
Boonton Power sensor 56518-S/4	2009-09	503 145
Multimeter Fluke 87	2009-01	502 190
Testo 610, Temperature and humidity meter	2009-04	502 658

Measurement uncertainty: 0.5 dB**Results**

Maximum rated output power level after sAIU: 42.4 dBm (17.4 W)

Test conditions	Transmitter power (dBm) RMS
	Frequency 871.4 MHz
T _{nom} 22 °C V _{nom} 120 V AC (RBS 3303)	42.6
TM1 with only QPSK	42.6
TM6 incl. 64QAM	42.6

Limit

According to CFR § 22 there are no conducted limits at the antenna connector.

CFR § 22.913: The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts (57 dBm).

Complies?	Yes
-----------	-----

FCC ID: TA8AROJ1192288-1

Appendix 3

Occupied bandwidth measurements according to 47 CFR 2.1049

Date	Temperature	Humidity
2008-10-30	22 °C ± 3 °C	24 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. The transmitter was set up according to Test model 1 and Test model 6 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ	2009-08	503 738
Testo 610, Temperature and humidity meter	2009-04	502 658

Measurement uncertainty: 3.7 dB**Results**

The results are shown in appendix 3.1

TM1 with only QPSK

Frequency	OBW
Diagram 1: 871.4 MHz	4.2 MHz

TM6 incl. 64QAM

Frequency	OBW
Diagram 2: 871.4 MHz	4.2 MHz

FCC ID: TA8AROJ1192288-1

Appendix 3.1

Diagram 1


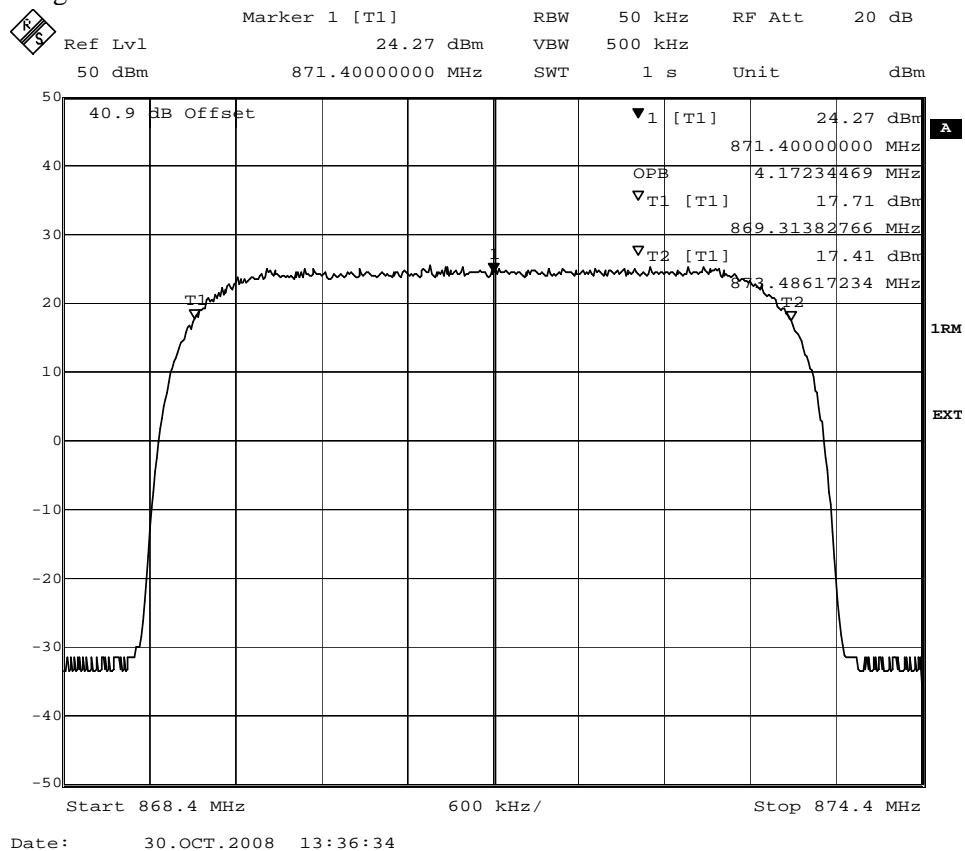


Diagram 2



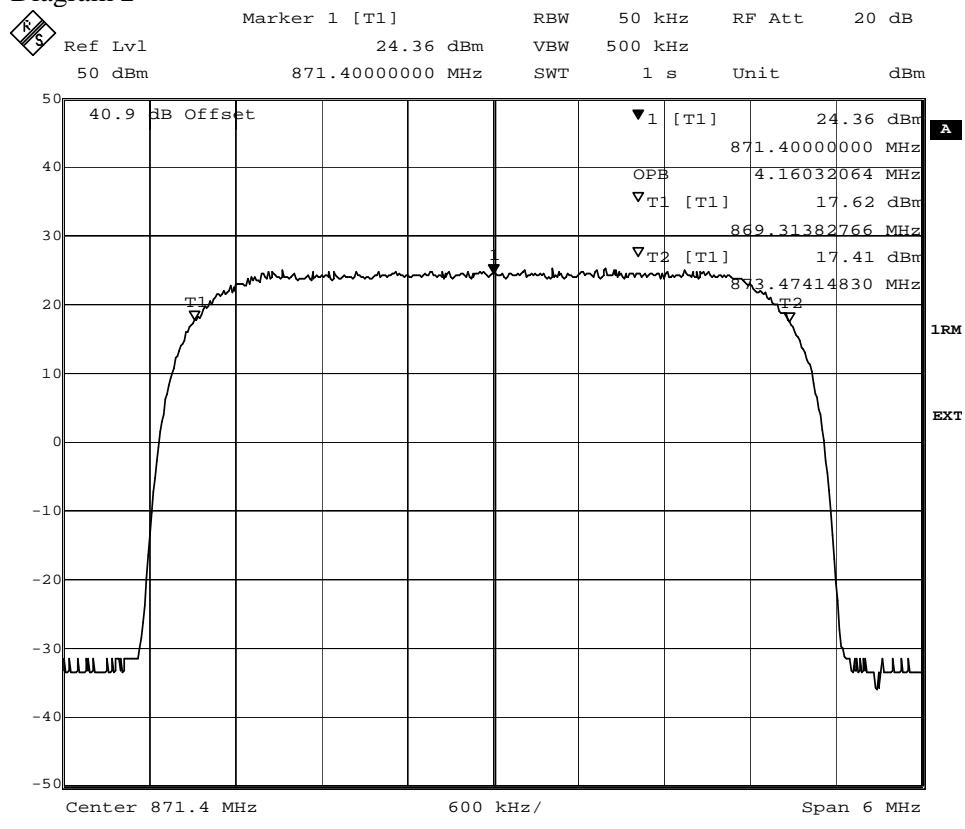

REPORT

Date 2008-11-11 Reference F816660-F22A Page 1 (1)

FCC ID: TA8AROJ1192288-1

Appendix 4

Band edge measurements according to 47 CFR 2.1051

Date	Temperature	Humidity
2008-10-30	22 °C ± 3 °C	24 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §22.917. The output was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. A resolution bandwidth of 30 kHz was used up to 3.25 MHz away from the band edges. 30 kHz is <1% of the Emission BW(4.25 MHz between the 26 dB points). To compensate for the reduced measurement band width, the limit was adjusted with 1.5 dB to -14.5 dBm up to 1 MHz away from the band edges and with 15.2 dB to -28.2 dBm between 1 MHz to 3.25 MHz away from the band edges. The transmitter was set up according to Test model 1 and Test model 6 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ	2009-08	503 738
Testo 610, Temperature and humidity meter	2009-04	502 658

Measurement uncertainty: 3.7 dB

Results

The results are shown in appendix 4.1

TM1 with only QPSK
Diagram 1: 871.4 MHz **TM6 incl. 64QAM**
Diagram 2: 871.4 MHz

Limits



The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.

Complies?	Yes
-----------	-----

FCC ID: TA8AROJ1192288-1

Appendix 4.1



Diagram 1

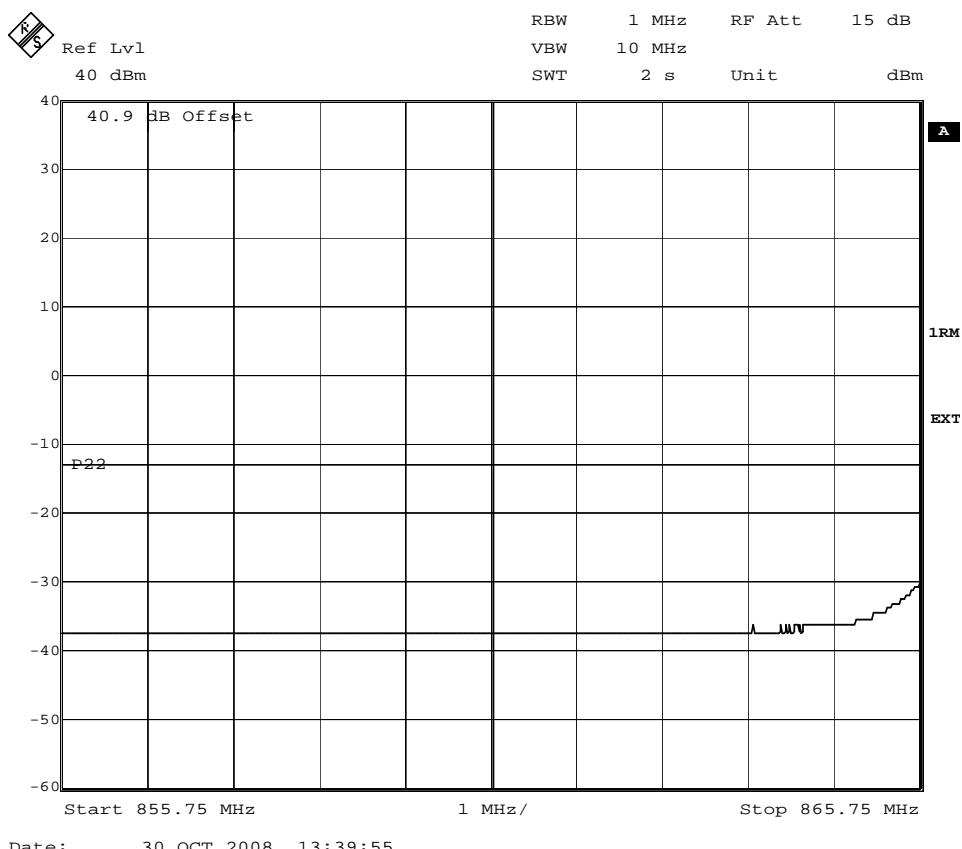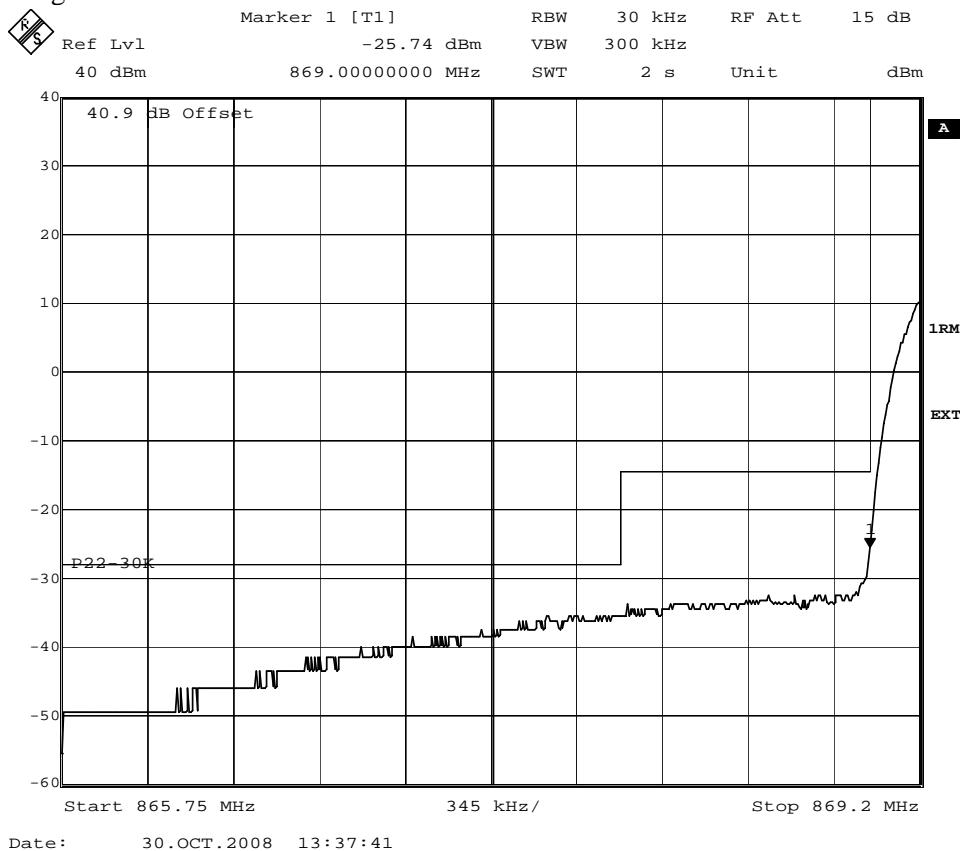

FCC ID: TA8AROJ1192288-1

Appendix 4.1

Diagram 2

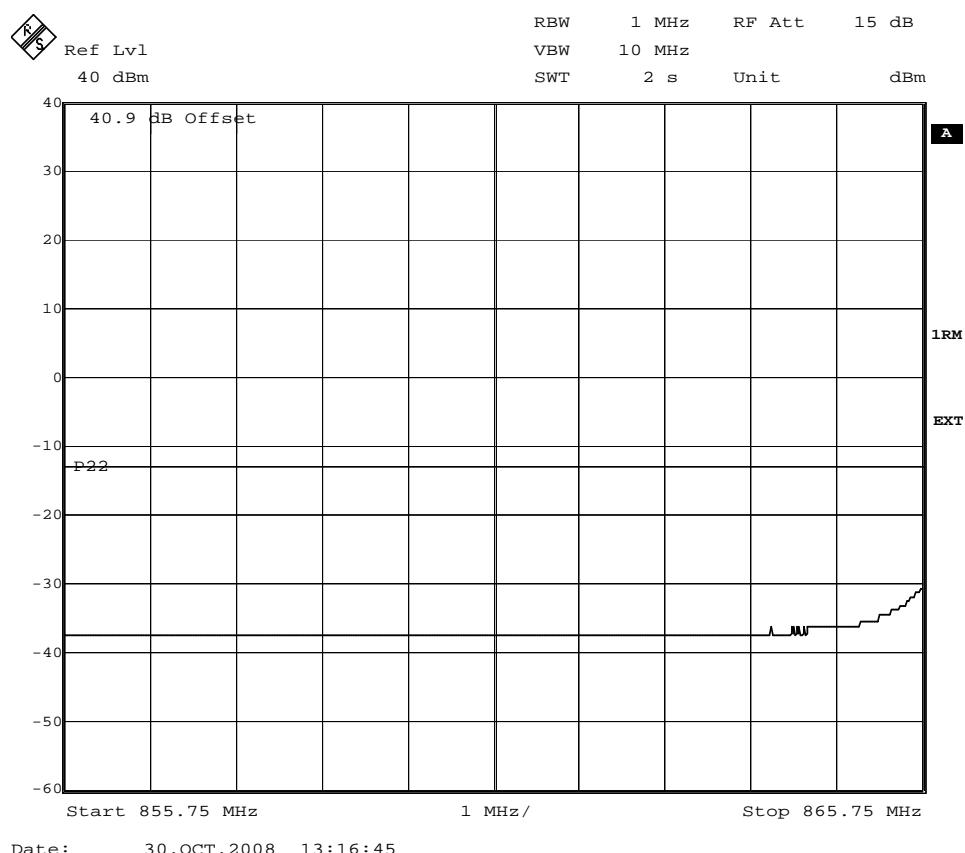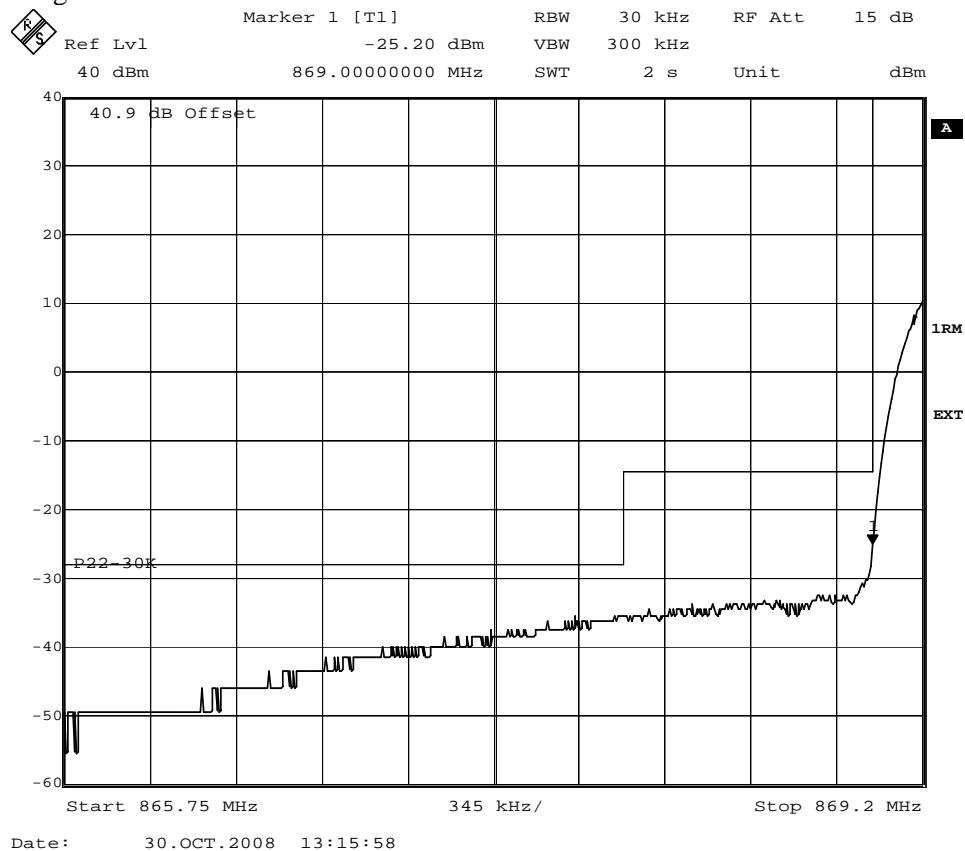



FCC ID: TA8AROJ1192288-1

Appendix 5

Conducted spurious emission measurements according to 47 CFR 2.1051

Date	Temperature	Humidity
2008-10-30	22 °C ± 3 °C	24 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §22.917, with a RBW of 1 MHz. The output was connected to a spectrum analyzer. A pre-measurement was performed with the PEAK detector activated. Emission above the limit with the PEAK detector is re-measured with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. The transmitter was set up according to Test model 1 and Test model 6 during the measurements.

Measurement equipment	Calibration Due	SP number
R&S FSIQ	2009-08	503 738
Testo 610, Temperature and humidity meter	2009-04	502 658

Measurement uncertainty: 3.7 dB**Results**

The results are shown in appendix 5.1

Diagram 1: **TM1 with only QPSK**
871.4 MHz

Diagram 2: **TM6 incl. 64QAM**
871.4 MHz

Remark

The emission at 9 kHz on the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feedthrough.

Limits



The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.

Complies?	Yes
-----------	-----

FCC ID: TA8AROJ1192288-1

Appendix 5.1



Diagram 1

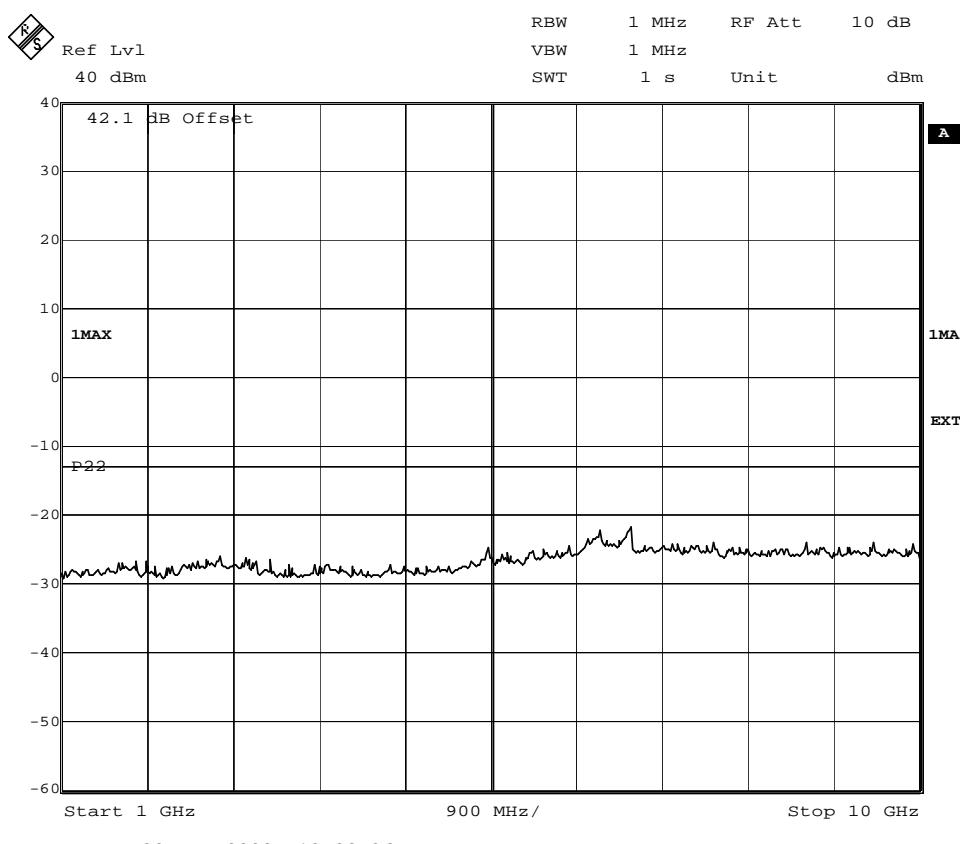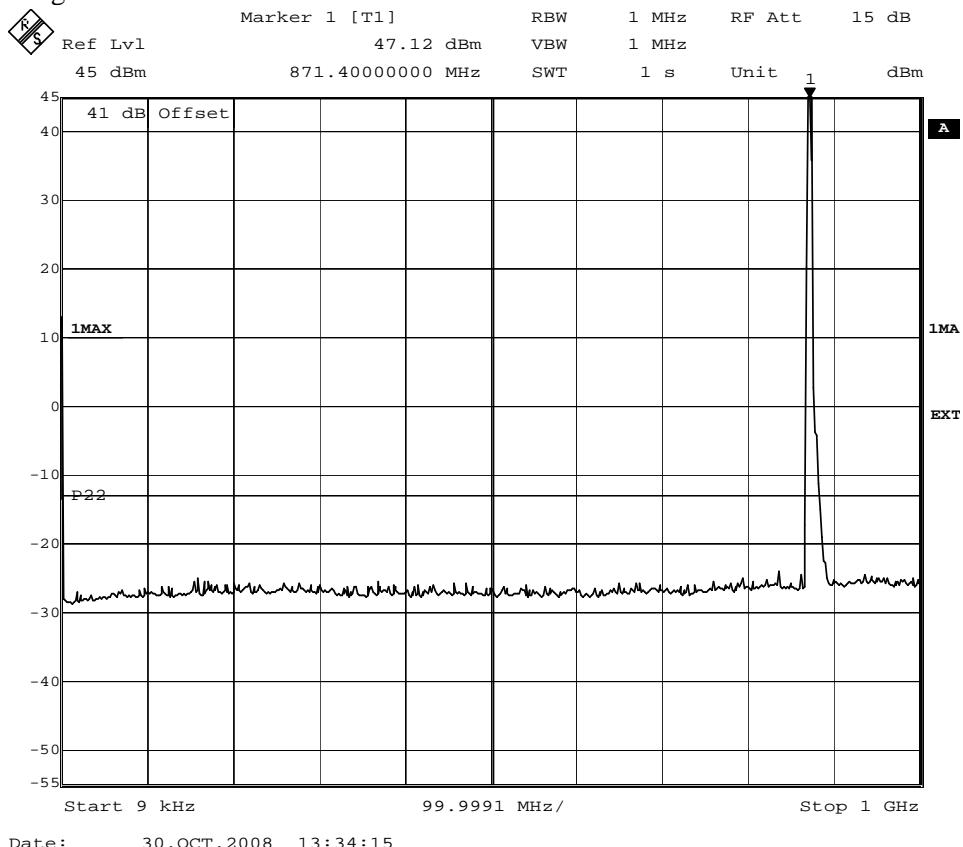

FCC ID: TA8AROJ1192288-1

Appendix 5.1

Diagram 2

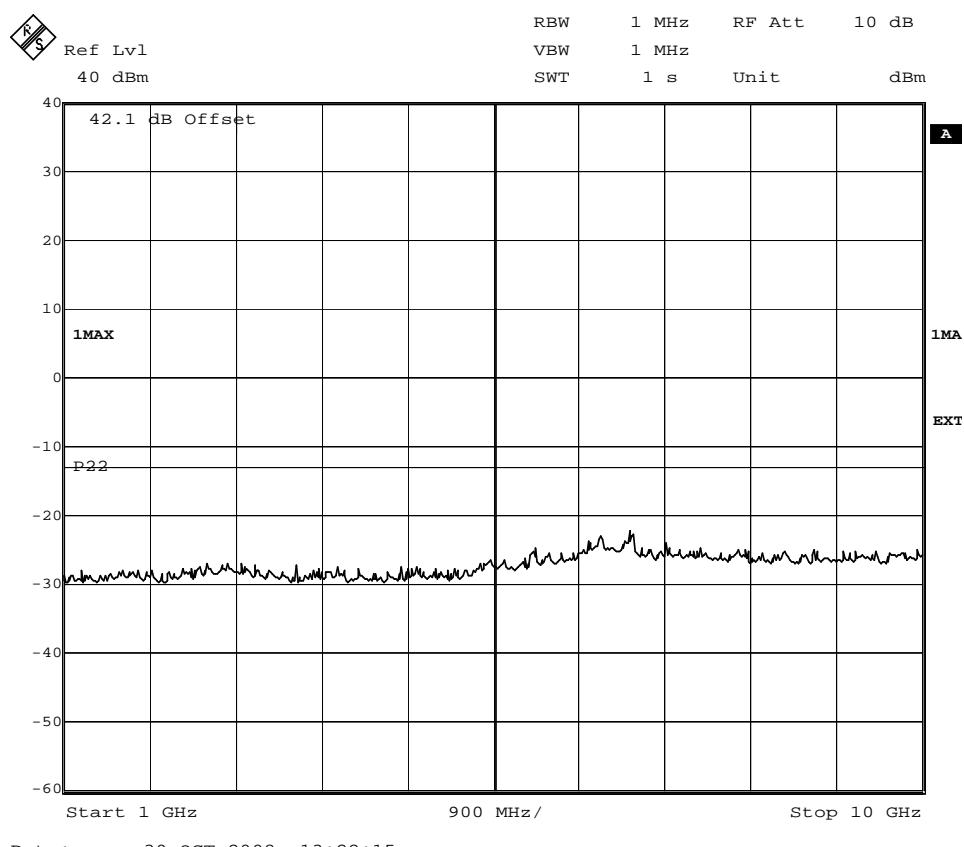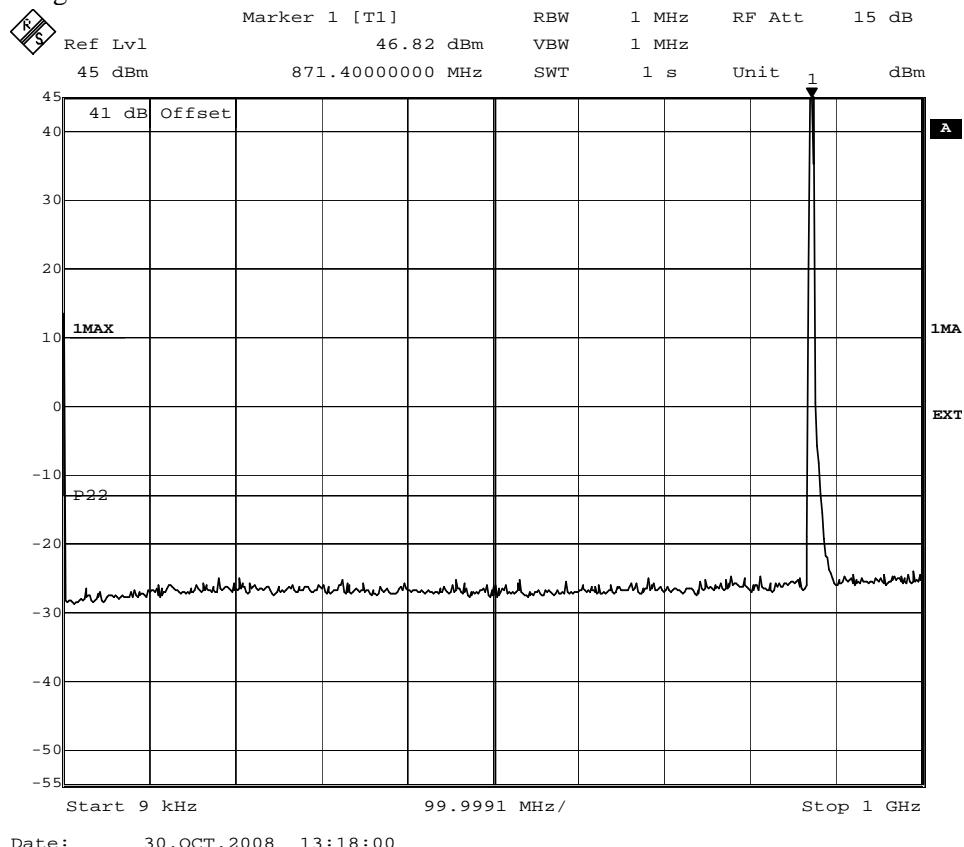

FCC ID: TA8AROJ1192288-1

Appendix 6

Field strength of spurious radiation measurements according to 47 CFR 2.1053

Date	Temperature	Humidity
2008-10-24	22 °C ± 3 °C	38 % ± 5 %

Test set-up and procedure

The test site is listed at FCC, Columbia with registration number: 93866. During the measurements the transmitter was set up according to Test model 1 with only QPSK and Test model 6 including 64QAM. The antenna port Ant B was terminated with a 50 ohm load.

The measurements were performed with both horizontal and vertical polarisation of the antenna. The antenna distance was 3 m..

A pre-measurement was first performed:

In the frequency range 30 MHz-10 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was,

$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right),$$
 is the propagation loss and D is the antenna distance.

The measurement procedure was as the following:


1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit is scanned 0-360 degrees and the antenna is scanned 1-4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported, frequencies closer than 10 dB to the limit measured with the RMS detector were measured with the substitution method according to the standard

Measurement equipment	Calibration Due	SP number
Test site Tesla	2010-10	503 881
R&S ESI 26	2009-07	503 292
Control computer	-	A700307
Software: R&S EMC32, Ver. 6.30	-	-
Chase Bilog antenna CBL 6111A	2008-11	503 182
EMCO Horn Antenna 3115	2011-01	502 175
MITEQ Low Noise Amplifier	2009-06	503 285
Testo 610, Temperature and humidity meter	2009-04	502 658

FCC ID: TA8AROJ1192288-1

Appendix 6

The test set-ups during the spurious radiation measurements are shown in the picture below.

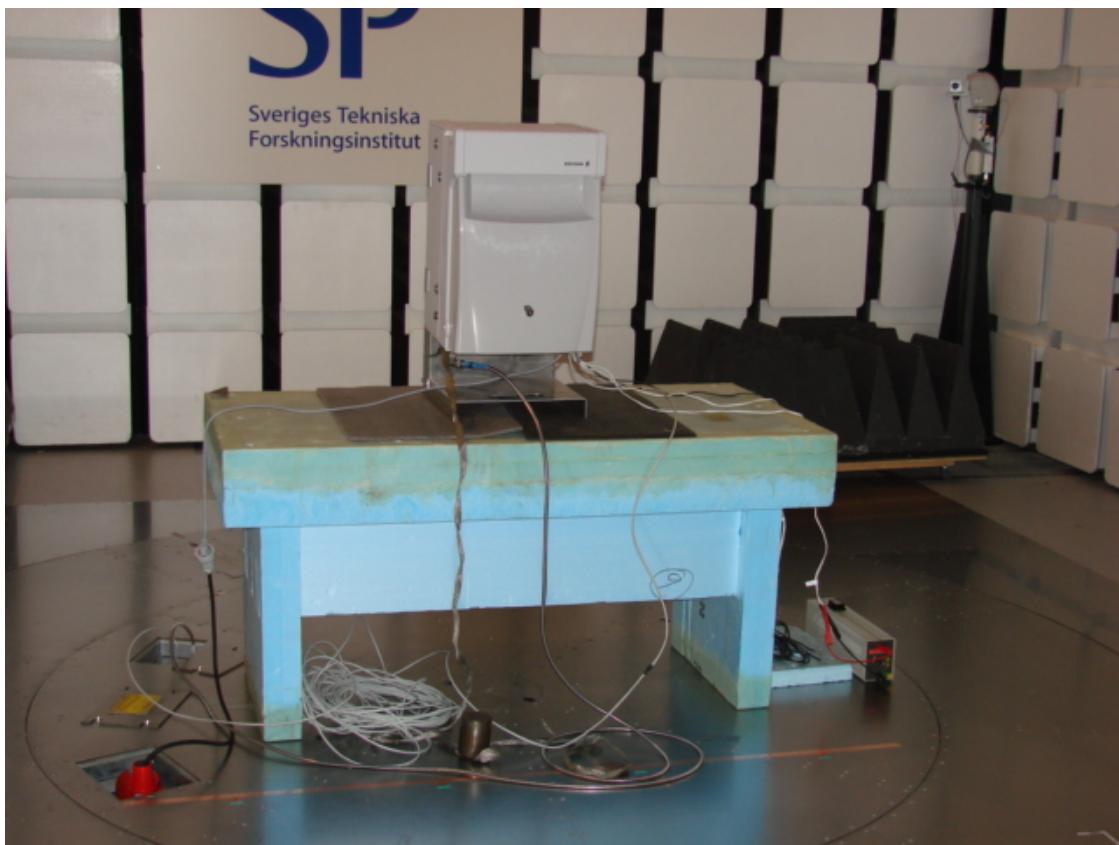

FCC ID: TA8AROJ1192288-1

Appendix 6

Results**TM1 with only QPSK**

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-10 000	All emission > 20 dB below limit	All emission > 20 dB below limit
Measurement uncertainty		
4.7 dB		

TM6 incl. 64QAM

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-10 000	All emission > 20 dB below limit	All emission > 20 dB below limit
Measurement uncertainty		
4.7 dB		

Limits

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10 \log P$ dB.

Complies?	Yes
-----------	-----

FCC ID: TA8AROJ1192288-1

Appendix 7

Photos**sTRX, front side****sTRX, back side**