

Ericsson AB
Klaes Holm
PDU HW
164 80 Stockholm

Class II permissive change on RUS 01 B4 1700/2100 MHz radio equipment with FCC ID: TA8BKRC11859-1 and IC: 287AB-BS118591

(7 appendices)

Test object

RUS 01 B4, KRC 118 59/1, Rev R3A


Summary

Standard	Compliant	Appendix
FCC CFR 47 / IC RSS-139		
2.1046 / RSS-139 6.4 RF power output	Yes	2
2.1049 / RSS-Gen 4.6.1 Occupied bandwidth	Yes	3
2.1051 / RSS-139 6.5 Band edge	Yes	4
2.1051 / RSS-139 6.5 Spurious emission at antenna terminals	Yes	5
2.1053 / RSS-139 6.5 Field strength of spurious radiation	Yes	6

Note: Above RSS-139 items are given as cross-reference only. Measurements were performed according to ANSI procedures referenced by FCC and covered by SP's accreditation.

SP Technical Research Institute of Sweden Electronics - EMC

Performed by



Jörgen Wassholm

Examined by



Christer Karlsson

SP Technical Research Institute of Sweden

Postal address

SP
Box 857
SE-501 15 BORÅS
Sweden

Office location

Västerås
Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@sp.se

This document may not be reproduced other than in full, except with the prior written approval of SP.

Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Test setups	Appendix 1
Purpose of test	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
External photos	Appendix 7

Appendix 1

Description of the test object

Equipment:	Radio equipment RUS 01 B4 supporting 2x2 MIMO and mixed mode standard (MSR) LTE+WCDMA.
Antenna ports:	1 TX/RX and 1 RX port
Frequency bands:	TX: 2110 – 2155 MHz RX: 1710 – 1755 MHz
Nominal output power per antenna port:	Single carrier: 1x 47.8 dBm (1 x 60.0W) Multi carrier: 2 x 44.8 dBm (2 x 30.0W) 3 x 43.0 dBm (3 x 20W) 4 x 41.8 dBm (4 x 15W) In WCDMA MIMO configuration nominal output power is limited to 1 x 47 dBm (1 x 50W)
LTE Modulations:	QPSK, 16QAM and 64QAM
Channel bandwidth:	1.4MHz, 3 MHz, 5 MHz, 10 MHz and 15 MHz, 20MHz
WCDMA Modulations:	QPSK, 16QAM and 64QAM
Channel bandwidth:	4.2 to 5 MHz (configurable in steps of 100/200 kHz)
Channel spacing:	4.4 to 5 MHz (configurable in steps of 100/200 kHz)
Nominal power voltage:	-48VDC

Appendix 1

LTE, MIMO:

Tested frequencies and EARFCNs for TX measurements

EARFCN	Frequency [MHz]	Comment
Downlink		
1957	2110.7	TX bottom (B) frequency in 1.4 MHz BW configuration
1965	2111.5	TX bottom (B) frequency in 3 MHz BW configuration
1975	2112.5	TX bottom (B) frequency in 5 MHz BW configuration
2000	2115.0	TX bottom (B) frequency in 10 MHz BW configuration
2025	2117.5	TX bottom (B) frequency in 15 MHz BW configuration
2050	2120.0	TX bottom (B) frequency in 20 MHz BW configuration
2175	2132.5	TX mid (M) frequency in all BW configurations
2393	2154.3	TX top (T) frequency in 1.4 MHz BW configuration
2385	2153.5	TX top (T) frequency in 3 MHz BW configuration
2375	2152.5	TX top (T) frequency in 5 MHz BW configuration
2350	2150.0	TX top (T) frequency in 10 MHz BW configuration
2325	2147.5	TX top (T) frequency in 15 MHz BW configuration
2300	2145.0	TX top (T) frequency in 20 MHz BW configuration

WCDMA, MIMO

Tested frequencies and UARFCNs for TX measurements

Channel	Downlink		Uplink	
	Frequency	UARFCN	Frequency	UARFCN
B	2112.4	1537	1712.4	1312
B+5	2117.4	1562	1717.4	1337
M	2132.6	1638	1732.6	1413
M+5	2137.6	1663	1737.6	1438
T-5	2147.6	1713	1747.6	1488
T	2152.6	1738	1752.6	1513

Appendix 1

LTE+WCDMA

Tested configurations

Configuration 1:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2125 (2127.5 MHz)	1538 (2112.6 MHz)
Uplink	20125 (1727.5 MHz)	1313 (1712.6 MHz)
Test model	E-TM1.1	TM1
Bandwidth	5 MHz	5 MHz

Configuration 2:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2136 (2128.6 MHz)	1538 (2112.6 MHz)
Uplink	20136 (1728.6 MHz)	1313 (1712.6 MHz)
Test model	E-TM1.1	TM1
Bandwidth	3 MHz	5 MHz

Appendix 1

Configuration 3:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2143 (2129.3 MHz)	1538 (2112.6 MHz)
Uplink	20143 (1729.3 MHz)	1313 (1712.6 MHz)
Test model	E-TM1.1	TM1
Bandwidth	1.4 MHz	5 MHz

Configuration 4:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2250 (2140 MHz)	1600 (2125 MHz)
Uplink	20250 (1740 MHz)	1375 (1725 MHz)
Test model	E-TM1.1	TM1
Bandwidth	5 MHz	5 MHz

Appendix 1

Configuration 5:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2260 (2141 MHz)	1600 (2125 MHz)
Uplink	20260 (1741 MHz)	1375 (1725 MHz)
Test model	E-TM1.1	TM1
Bandwidth	3 MHz	5 MHz

Configuration 6:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2270 (2142 MHz)	1600 (2125 MHz)
Uplink	20270 (1742 MHz)	1375 (1725 MHz)
Test model	E-TM1.1	TM1
Bandwidth	1.4 MHz	5 MHz

Appendix 1

Configuration 7:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2375 (2152.5 MHz)	1663 (2137.6 MHz)
Uplink	20375 (1752.5 MHz)	1438 (1737.6 MHz)
Test model	E-TM1.1	TM1
Bandwidth	5 MHz	5 MHz

Configuration 8:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2385 (2153.5 MHz)	1663 (2137.6 MHz)
Uplink	20385 (1753.5 MHz)	1438 (1737.6 MHz)
Test model	E-TM1.1	TM1
Bandwidth	3 MHz	5 MHz

Appendix 1

Configuration 9:

	LTE	WCDMA
	(30 W)	(30 W)
Downlink	2393 (2154.3 MHz)	1663 (2137.6 MHz)
Uplink	20393 (1754.3 MHz)	1438 (1737.6 MHz)
Test model	E-TM1.1	TM1
Bandwidth	1.4 MHz	5 MHz

Configuration 10:

	WCDMA	LTE
	(30 W)	(40 W)
Downlink	1730 (2151.0 MHz)	2393 (2154.3 MHz)
Uplink	1505 (1751.0 MHz)	20393 (1754.3 MHz)
Test model	TM1	E-TM1.1
Bandwidth	5 MHz	1.4 MHz

Appendix 1

LTE Operation mode during measurements

The measurements were performed with the test object transmitting test model E-TM1.1 defined in 3GPP TS 36.141 as representative for worst case setting. The test object was powered with -48 VDC. All measurements were performed with the test object configured for maximum transmit power.

WCDMA Operation mode during measurements

Measurements in MIMO configuration were performed with the test object transmitting the test model 5 as representative for worst case setting. Measurements in multi standard (MSR) configuration were performed with the test object transmitting the test model 1 as representative for worst case setting. The test models are defined in 3GPP TS 25.141. Test model 1 (TM1) uses the QPSK modulation only. Test model 5 (TM5) includes the 16QAM modulation.

The following detailed settings were used:

MIMO configuration:

Single carrier

TM5: 30 DPCH:s at 30 kbps and 8 HS-PDSCH (SF=128)

Multi carrier (Two carriers)

TM5: 30 DPCH:s at 30 kbps and 8 HS-PDSCH (SF=128)

MSR Configuration:

TM1: 16 DPCH:s at 30 kbps (SF=128)

Channel bandwidth 5 MHz

Conducted measurements

The EUT was mounted in a RBS 6201 cabinet and supplied by the cabinet's internal -48 V DC. All RF conducted measurements were performed with the test object configured for maximum transmit power. The measurements were made on RUS 1 in MIMO mode when the object was primary linked to the DU. Additional measurements on RUS 1, when linked in secondary mode relative to DU, were made in order to verify identical performance.

Radiated measurements

The test object was powered with -48 VDC. All measurements were performed with the test object configured for maximum transmit power

Appendix 1

Purpose of test

The purpose of this test is to justify a Class II Permissive Change of the test object to include the use of MIMO and MSR for LTE and WCDMA access technology.

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47 and Industry Canada RSS-139 and RSS-Gen.

References

Measurements were done according to relevant parts of the following standards:

ANSI 63.4-2009

ANSI/TIA/EIA-603-C-2004

CFR 47 part 2, October 1st, 2011

CFR 47 part 27, October 1st, 2011

3GPP TS 25.141, version 8.9.0

RSS-Gen Issue 3

RSS-139 Issue 2

Appendix 1

Measurement equipment

	Calibration Due	SP number
Test site Tesla	2014-01	503 881
R&S FSIQ 40	2013-07	503 738
R&S FSQ 40	2013-05	504 143
R&S ESU 26	2013-09	901 553
Control computer with R&S software EMC32 version 8.52.0	-	503 479
High pass filter	2013-07	901 502
High pass filter	2013-07	504 199
High pass filter	2013-08	901 373
High pass filter	2014-08	503 739
High pass filter	2013-07	503 740
Directional coupler	2013-07	901 496
RF attenuator	2013-07	504 159
RF attenuator	2013-09	900 233
RF attenuator	2013-08	900 691
Chase Bilog Antenna CBL 6111A	2014-10	503 182
EMCO Horn Antenna 3115	2014-01	502 175
Std.gain horn FLANN model 20240-20	2014-03	503 674
µComp Nordic, Low Noise Amplifier	2013-03	901 545
MITEQ Low Noise Amplifier	2013-08	503 285
Testo 635 Temperature and humidity meter	2013-06	504 203
Temperature and humidity meter, Testo 625	2013-06	504 188

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered 2012-10-25.

Manufacturer's representative

Christer Gustavsson, Ericsson AB.

Appendix 1

Test engineers


Andreas Johnson, Tomas Lennhager, Tomas Isbring, Hyder Khalaf, Kexin Chen, Jörgen Wassholm and Martin Theorin, SP

Test participants

None

Appendix 1

Test set-up conducted measurements TX, MIMO LTE

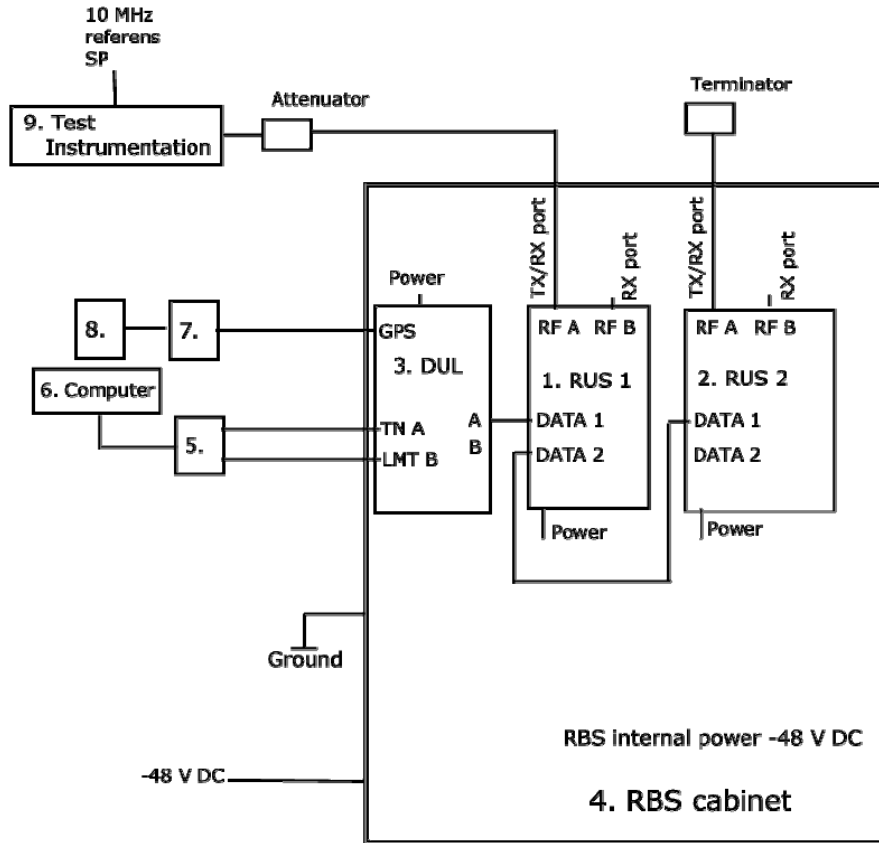

Test object

- 1-2. RUS 01 B4, KRC 118 59/1, revision R3A, S/N: C824772283 (RUS 1)
RUS 01 B4, KRC 118 59/1, revision R3A, S/N: C824772307 (RUS 2)


(FCC ID: TA8BKRC11859-1 / IC: 287AB-BS11859-1
with software (PIS): CXP 901 7316/1 rev. R44FJ
unlocked working software CXP 901 3268/6 R49AF

Functional test equipment

3. DUL 02 01, KDU 137 533/4, Rev R1D, S/N: C823997200
4. RBS 6201 cabinet, BAMS 1000778792
PDU 02 01, BMG 980 336/4, revision R2A, S/N: BJ31528316
5. Fast Ethernet Switch: NETGEAR 10/100 Mbps model: FS108
6. Controlling laptop HP Elitebook 8540w, BAMS 1001053032
running software MOSHELL V9.0c
7. GPS 02 01, NCD 901 41/1, rev. R1D, s/n: TU8K356490
8. GPS antenna
9. Signal Analyzer, R&S FSQ 40

Appendix 1

Test set-up conducted measurements TX, MIMO WCDMA

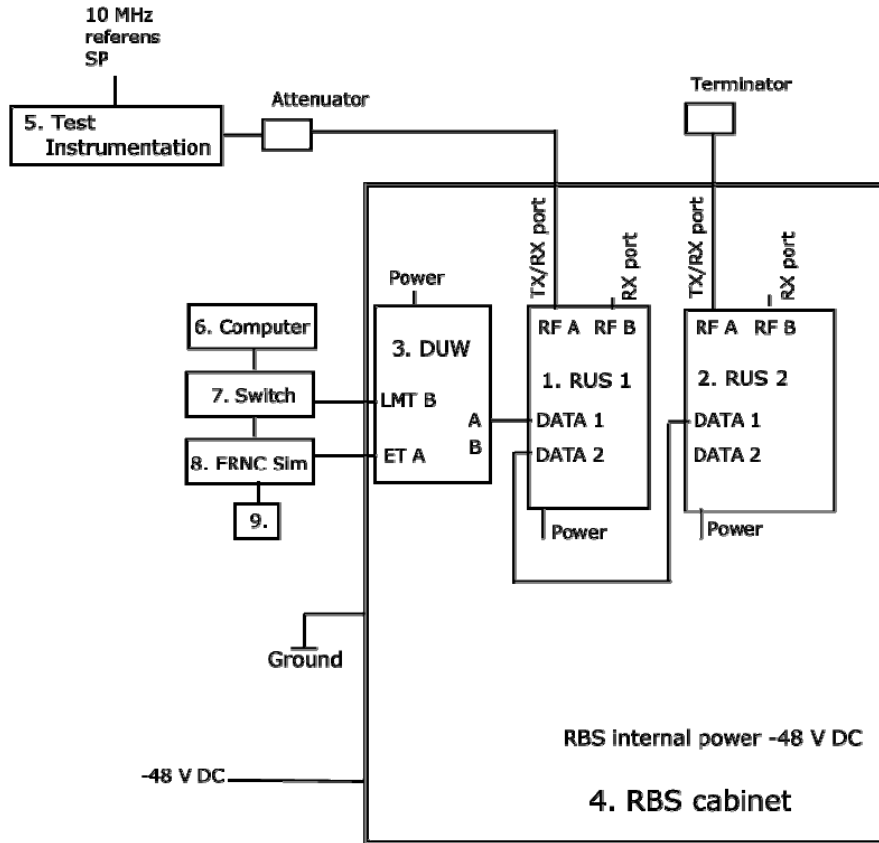

Test object

- 1-2. RUS 01 B4, KRC 118 59/1, revision R3A, S/N: C824772283 (RUS 1)
RUS 01 B4, KRC 118 59/1, revision R3A, S/N: C824772307 (RUS 2)

(FCC ID: TA8BKRC11859-1 / IC: 287AB-BS118591)

with software (PIS): CXP 901 7316/1 rev. R44FJ


unlocked working software CXP 901 3268/6 R49AL

Functional test equipment

3. DUW 30 01, KDU 127 161/3, rev:R4E, s/n: C826303727
4. RBS 6201 cabinet, BAMS 1000778792
PDU 02 01, BMG 980 336/4, revision R2A, S/N: BJ31528316
5. Signal Analyzer, R&S FSQ 40
6. Controlling laptop HP Elitebook 8540w, BAMS 1001053032
running software MOSHELL V9.0c
7. Fast Ethernet switch, Netgear FS726G
8. ERNC Sim 127
9. Symmetricon 8040, BAMS 1000714186

Appendix 1

Test set-up conducted measurements TX, MSR

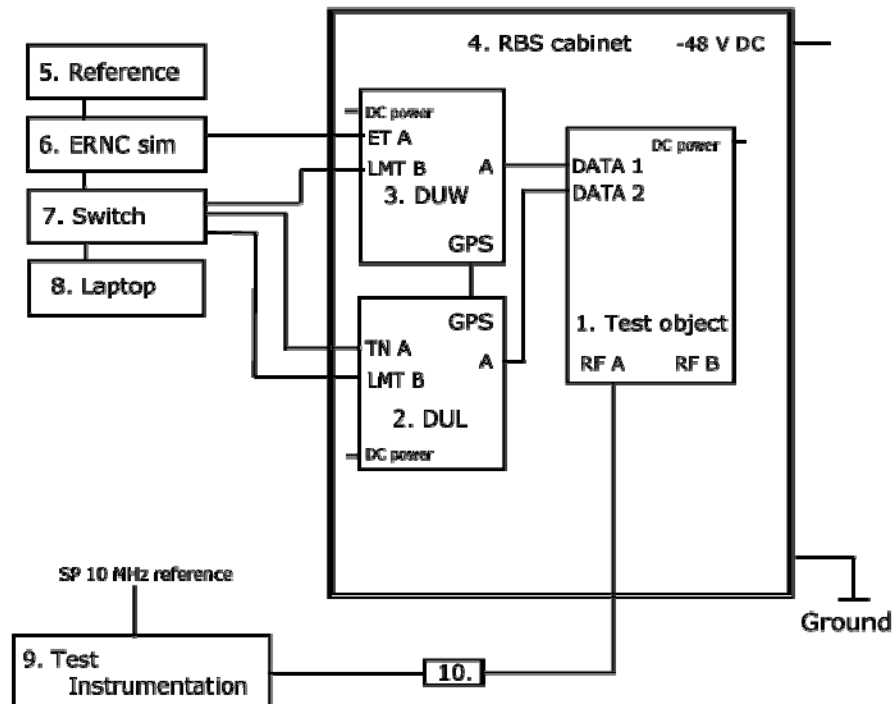

Test object

1-2. RUS 01 B4, KRC 118 59/1, revision R3A, S/N: C824772283 (RUS 1)

(FCC ID: TA8BKRC11859-1 / IC: 287AB-BS118591)

with software (PIS): CXP 901 7316/1 rev. R44FJ


unlocked working software CXP 901 3268/6 R49AL

Functional test equipment

3. DUW 30 01, KDU 127 161/3, rev:R4E, s/n: C826303727
4. RBS 6201 cabinet, BAMS 1000778792
PDU 02 01, BMG 980 336/4, revision R2A, S/N: BJ31528316
5. Signal Analyzer, R&S FSQ 40
6. Controlling laptop HP Elitebook 8540w, BAMS 1001053032
running software MOSHELL V9.0c
7. Fast Ethernet switch, Netgear FS726G
8. ERNC Sim 127
9. Symmetricon 8040, BAMS 1000714186

Appendix 1

Test set-up radiated measurements

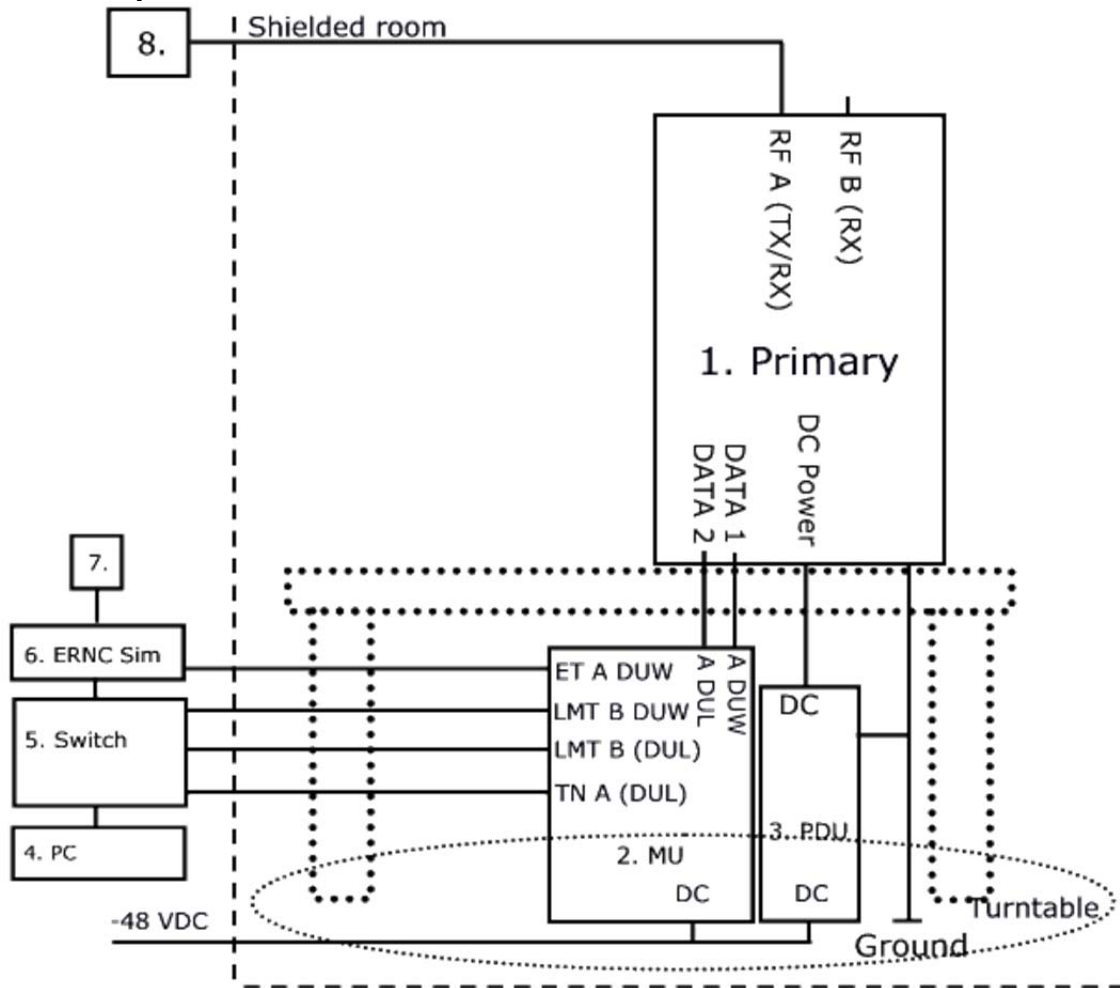

Test object:

1. RUS 1: RUS 01 B4, KRC 118 59/1, rev. R3A, s/n: C824772283
with unlocked working software for LTE: CXP 901 3268/6 R49AF
with unlocked working software for WCDMA and MSR: CXP 901 3268/6 R49AL
RUS 2: RUS 01 B4, KRC 118 59/1, rev. R3A, s/n: C824772307
with unlocked working software for LTE: CXP 901 3268/6 R49AF
with unlocked working software for WCDMA and MSR: CXP 901 3268/6 R49AL

Appendix 1

Functional test equipment:

2.	DUW 30 01, KDU 127 161/3, rev: R4E, s/n: C826303727 hosted in SUP 6601 1/BFL 901 009/1 rev: R2A, s/n. BR80879339 DUL 20 01 KDU 137 533/4 R1D C823997200, hosted in SUP 6601 1/BFL 901 009/1 Rev R3C, S/N. BR81734294
3.	Power Subrack: PDU 01 01, BMG 980 336/2, R4F, BJ31532384 PDU 01 01, BMG 980 336/2, R4F, BJ31532382 SHU 01 01, BGK 901 18/1, R3C, BJ31446269 PFU 01 01, KFE 101 1162/1, R1B, BR80910495 PCF 02 01, KFE 101 1157/1, R1C, BW95301450 DUMMY x3, SXX 109 8257/1, R1D DUMMY x1, SXX 109 8257/1, R1F
4.	Computer HP Elitebook 8540w, BAMS – 1001052043
5.	Fast Ethernet switch, Netgear FS726G
6.	ERNC Sim 127
7.	Symmetricon 8040, BAMS 1000714186
8.	Terminator

Interface:	Type of port:
Power: -48 VDC	DC Power
Antenna port (A), 7/16 connector, combined TX/RX	Antenna
Antenna port (B), 7/16 connector, only RX	Antenna
Data 1, electrical interface	Signal
Data 2, electrical interface, used for MSR	Signal
RXA I/O cross connector, used for MIMO	Signal
RXA OUT cross connector, unused	Signal
RXB I/O cross connector, used for MIMO	Signal
Ground wire	Ground

RBS software

	Software	Revision
DUL	CXP 102 051/16	R23BV
DUW	CXP 901 8350/1	R9V16

Appendix 2

RF power output measurements according to CFR 47 §27.50 / IC RSS-139 6.4

Date	Temperature	Humidity
2012-11-23	23 °C ± 3 °C	30 % ± 5 %
2012-11-26	23 °C ± 3 °C	32 % ± 5 %
2012-11-27	23 °C ± 3 °C	31 % ± 5 %
2012-11-28	23 °C ± 3 °C	28 % ± 5 %
2012-11-29	23 °C ± 3 °C	19 % ± 5 %

Test set-up and procedure

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A resolution bandwidth of 60 MHz was used.

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	504 159
RF attenuator	901 384
RF attenuator	900 233
Directional coupler	901 496
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB

Appendix 2

Results

LTE:

Single carrier: 1x LTE: Rated output power level at RF connector 1x 47.8 dBm

Test conditions Bandwidth/ Frequency	Transmitter power RMS (dBm)		
	RUS 1 Primary linked	RUS 1 Secondary linked	Primary+ Secondary ¹⁾
BW 1.4MHz, M	46.45	46.58	49.53
BW 3MHz, M	46.69	46.67	49.69
BW 5MHz, M	46.78	46.66	49.73
BW 10MHz, M	46.7	46.64	49.68
BW 15MHz, M	46.67	46.66	49.67
BW 20MHz ,M	46.71	46.71	49.72

Diagram	BW configuration	Tested frequency	Tested port
1	1.4 MHz	M	RUS 1, primary linked
2	1.4 MHz	M	RUS 1, secondary linked
3	3 MHz	M	RUS 1, primary linked
4	3 MHz	M	RUS 1, secondary linked
5	5 MHz	M	RUS 1, primary linked
6	5 MHz	M	RUS 1, secondary linked
7	10 MHz	M	RUS 1, primary linked
8	10 MHz	M	RUS 1, secondary linked
9	15 MHz	M	RUS 1, primary linked
10	15 MHz	M	RUS 1, secondary linked
11	20 MHz	M	RUS 1, primary linked
12	20 MHz	M	RUS 1, secondary linked

Appendix 2

WCDMA

Single carrier:1x WCDMA: Rated output power level at RF connector 1x 47 dBm/ RF port

Tested frequency	Transmitter power RMS (dBm)		
	RUS 1 Primary linked	RUS 1 Secondary linked	Primary+ Secondary ¹⁾
M	46.75	46.79	49.70

Multi carrier:2x WCDMA: Rated output power level at RF connector 2x 43 dBm/ RF port

Tested frequency	Transmitter power RMS (dBm)		
	RUS 1 Primary linked	RUS 1 Secondary linked	Primary+ Secondary ¹⁾
M+(M+5)	46.07	46.04	49.70, LTE+

Diagram	Tested frequency	Tested port
13	M+(M+5)	RUS 1, primary linked
14	M+(M+5)	RUS 1, secondary linked
15	M	RUS 1, primary linked
16	M	RUS 1, secondary linked

Appendix 2

MSR, LTE+WCDMA

LTE + WCDMA. Rated output power level at RF connector 2x 44.8 dBm/ RF port

Test configurations	Transmitter power RMS (dBm)
	RFA
Configuration 1	46.7
Configuration 4	46.83
Configuration 5	46.76
Configuration 6	46.65
Configuration 7	46.84

LTE + WCDMA:

Diagram	Tested configuration	Tested port
17	Configuration 1	RF A
18	Configuration 4	RF A
19	Configuration 5	RF A
20	Configuration 6	RF A
21	Configuration 7	RF A

¹⁾: 2 outputs summed power according to FCC KDB662911 Multiple transmitter output v01r02

Appendix 2

Limits


§27.50: The maximum output power may not exceed 1640 W (EIRP)/ MHz.
The Peak to Average Ratio (PAR) may not exceed 13 dB.

RSS-139 6.4: The average equivalent isotropically radiated power (e.i.r.p.) limits in SRSP-513 apply, resulting in a maximum EIRP of 1640 W/ MHz for the scope of this report. The peak-to-average ratio of the power shall not exceed 13 dB.

Complies?	Yes
-----------	-----


Appendix 2

Diagram 1:

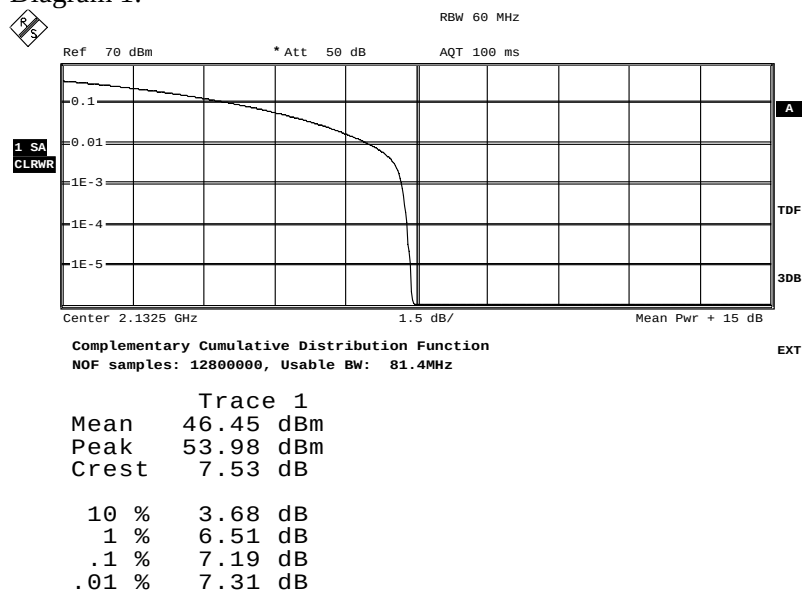

Date: 23.NOV.2012 10:03:20


Diagram 2:

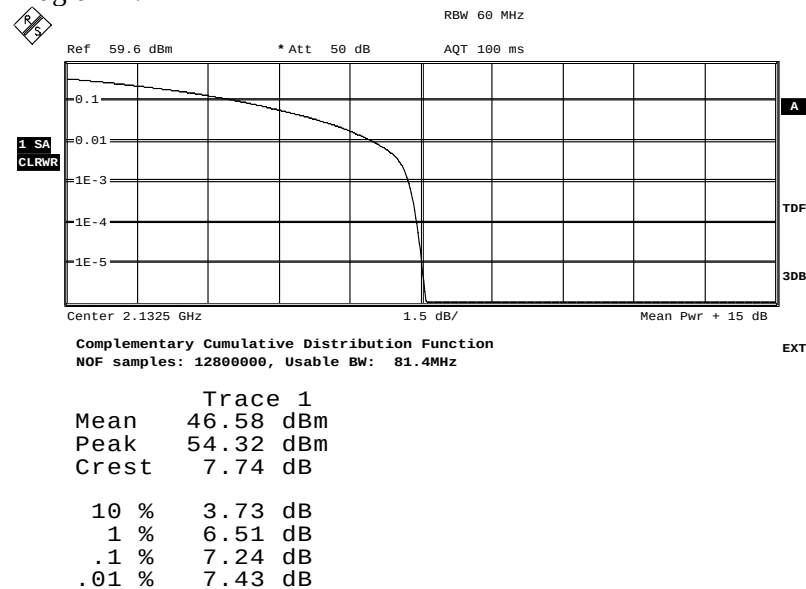

Date: 26.NOV.2012 12:05:02


Appendix 2

Diagram 3:

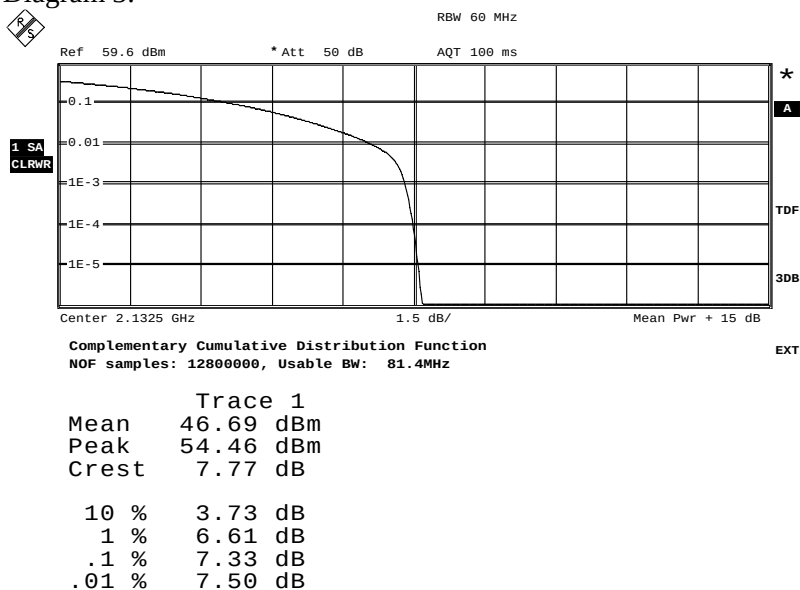

Date: 26.NOV.2012 10:26:41


Diagram 4:

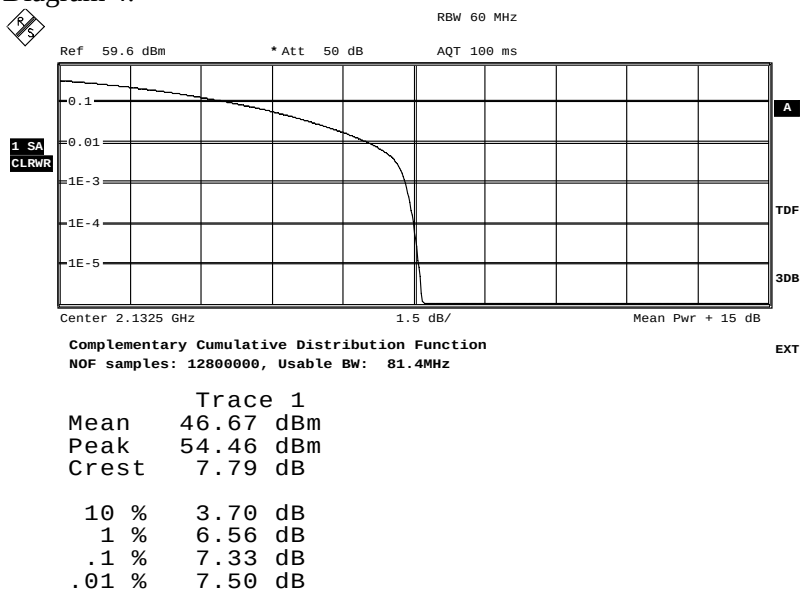

Date: 26.NOV.2012 12:06:37


Appendix 2

Diagram 5:

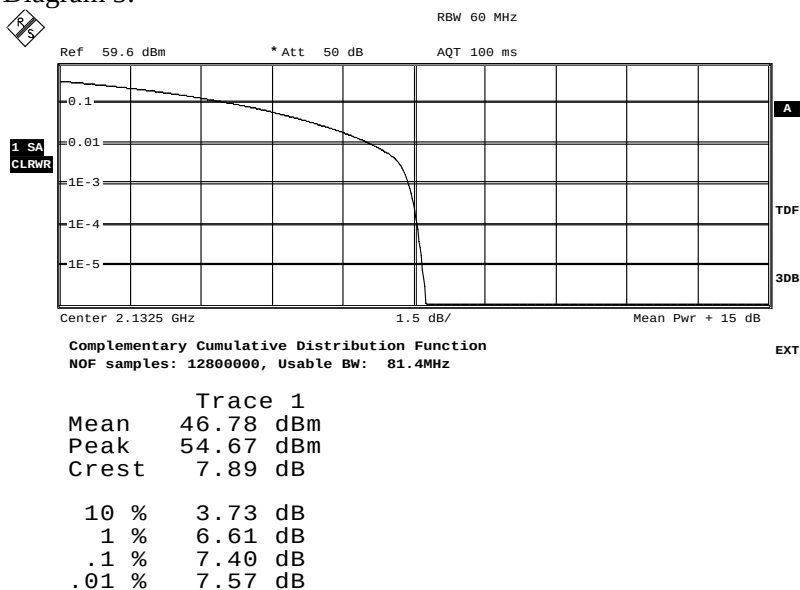

Date: 26.NOV.2012 10:31:49


Diagram 6:

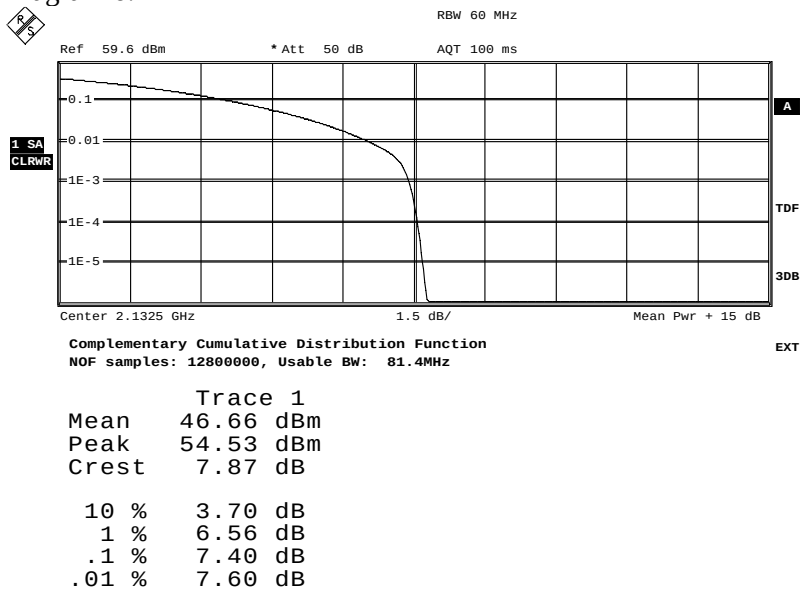

Date: 26.NOV.2012 12:08:56


Appendix 2

Diagram 7:

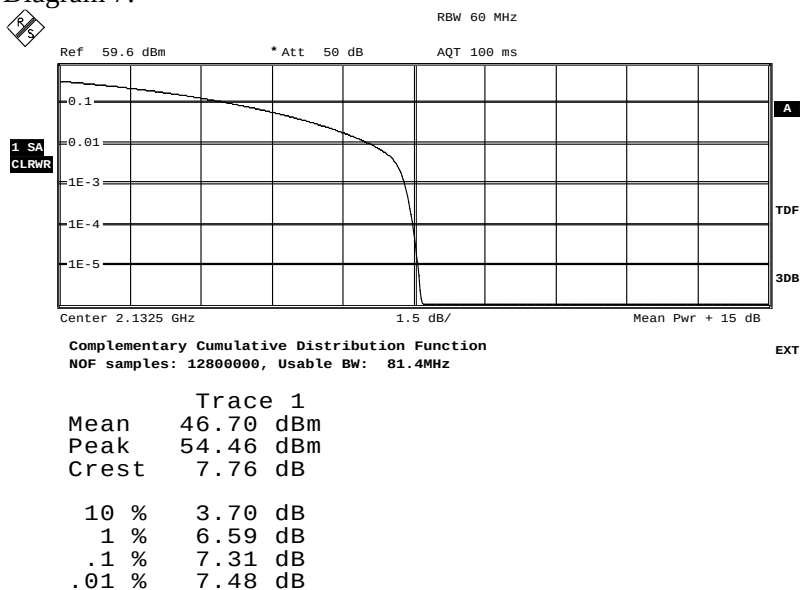

Date: 26.NOV.2012 10:39:58


Diagram 8:

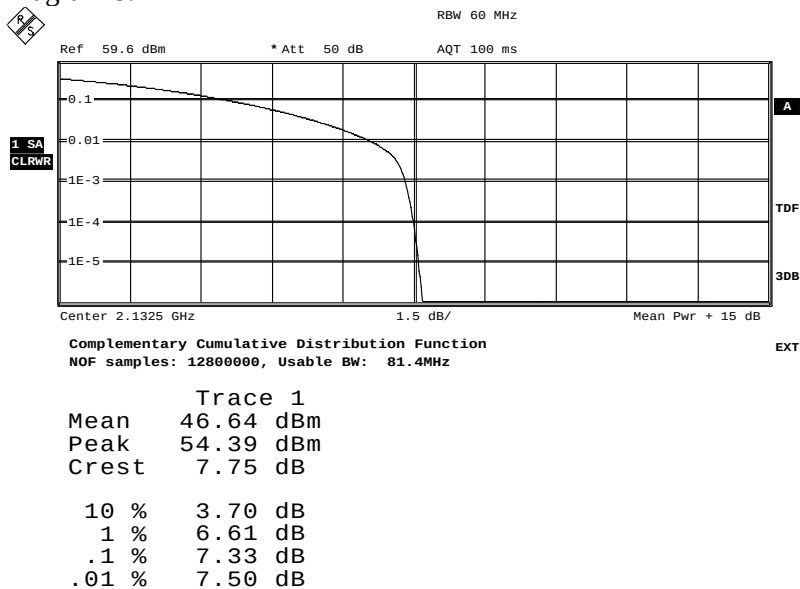

Date: 26.NOV.2012 12:11:40


Appendix 2

Diagram 9:

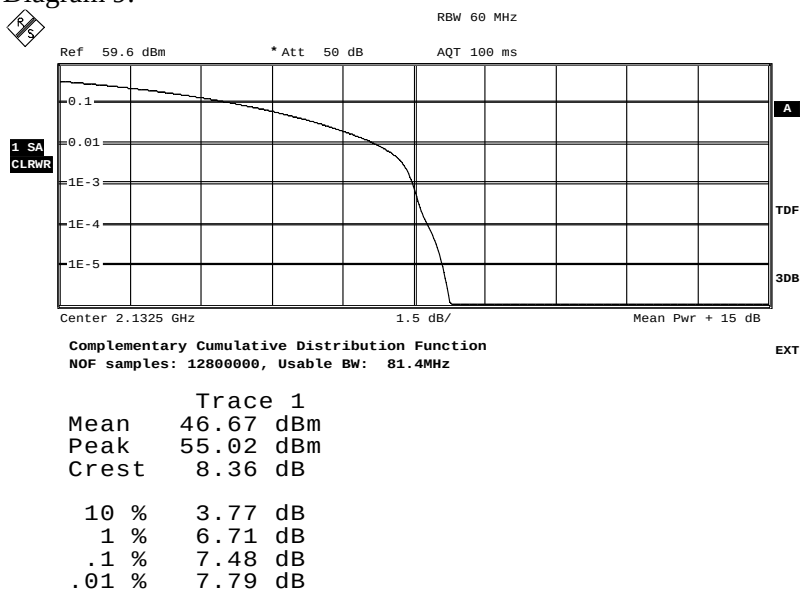

Date: 26.NOV.2012 10:41:32


Diagram 10:

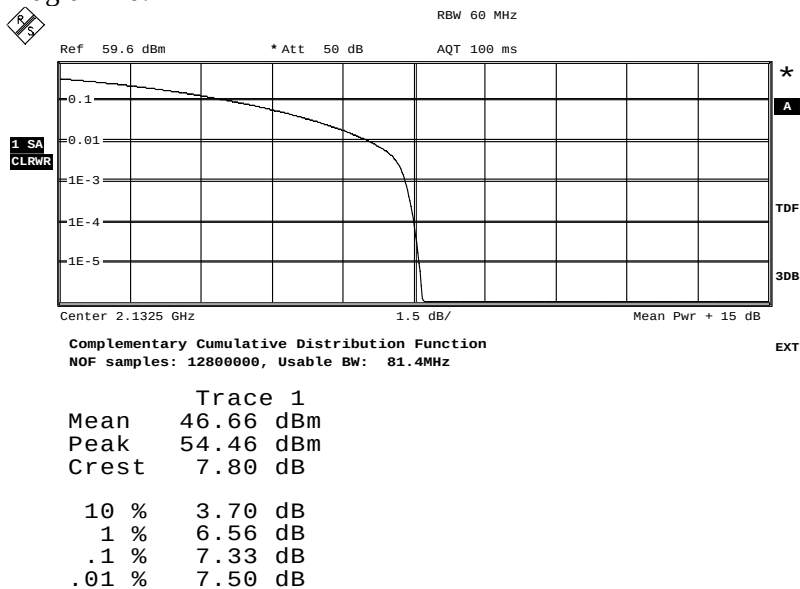

Date: 26.NOV.2012 11:45:26


Appendix 2

Diagram 11:

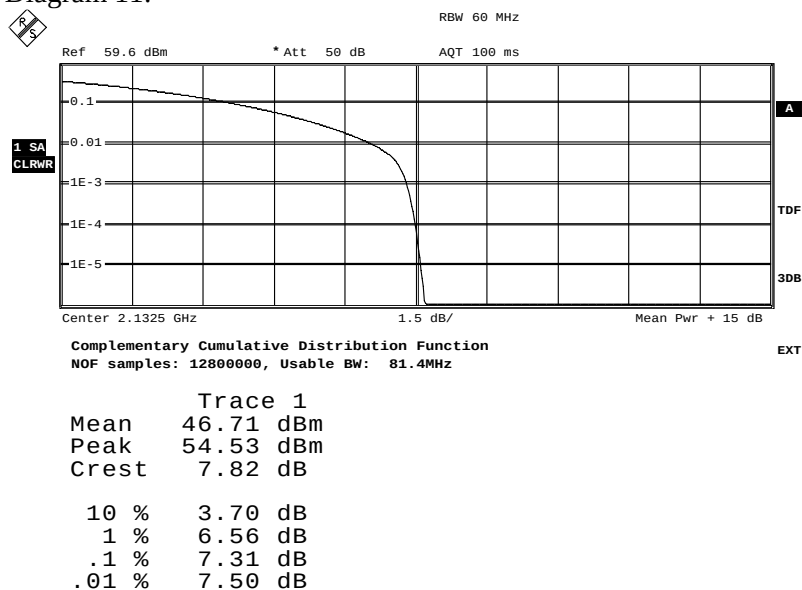

Date: 26.NOV.2012 10:12:09


Diagram 12:

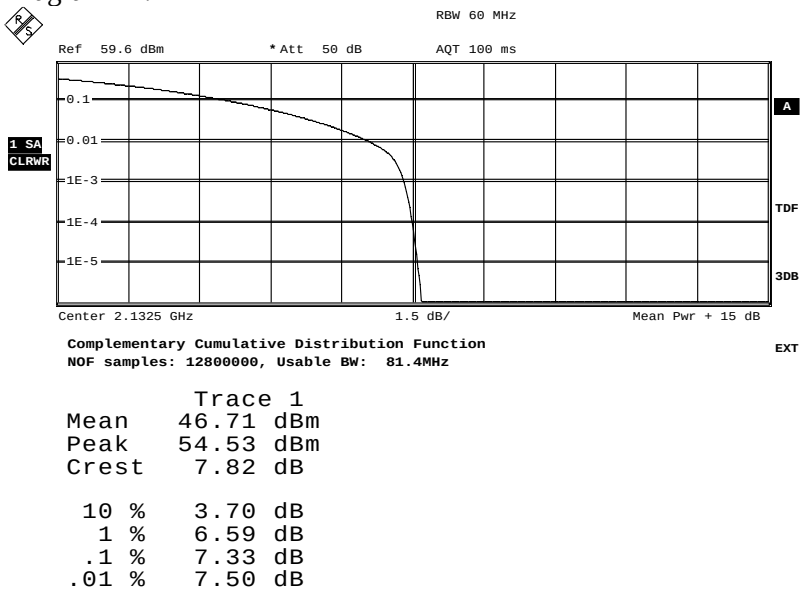

Date: 26.NOV.2012 11:46:54


Appendix 2

Diagram 13:

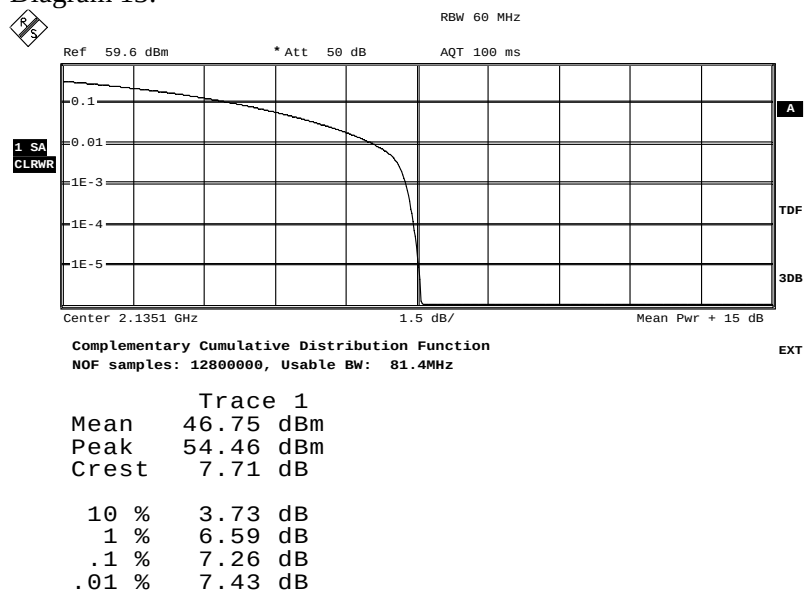

Date: 27.NOV.2012 14:47:13


Diagram 14:

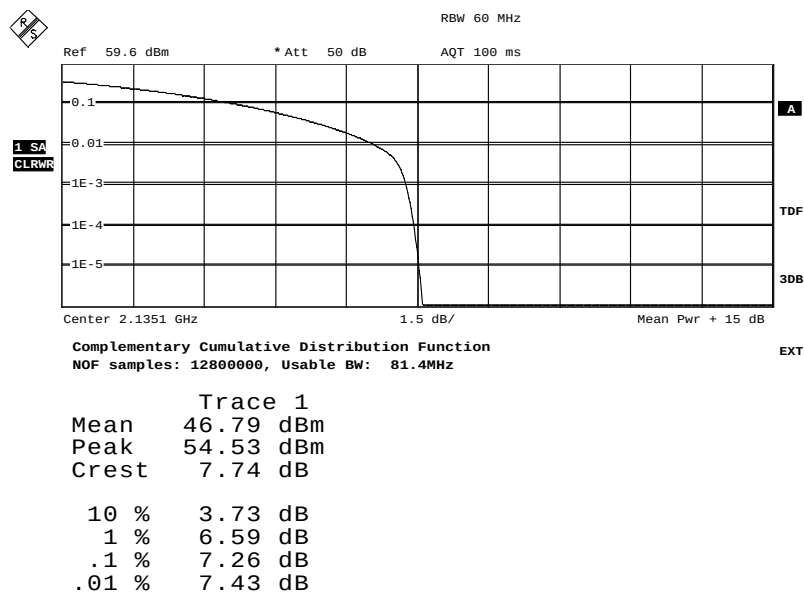

Date: 28.NOV.2012 07:53:44


Appendix 2

Diagram 15:

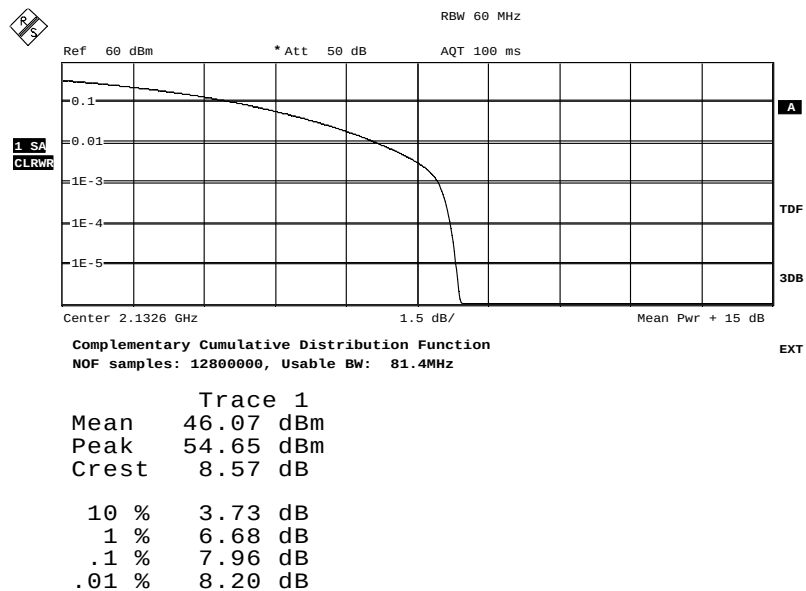

Date: 28.NOV.2012 13:41:49


Diagram 16:

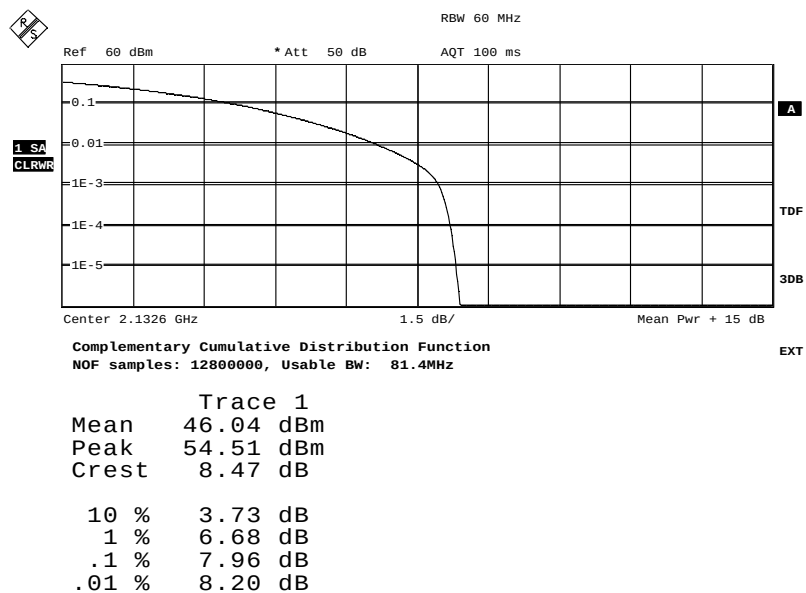

Date: 29.NOV.2012 09:08:31


Appendix 2

Diagram 17:

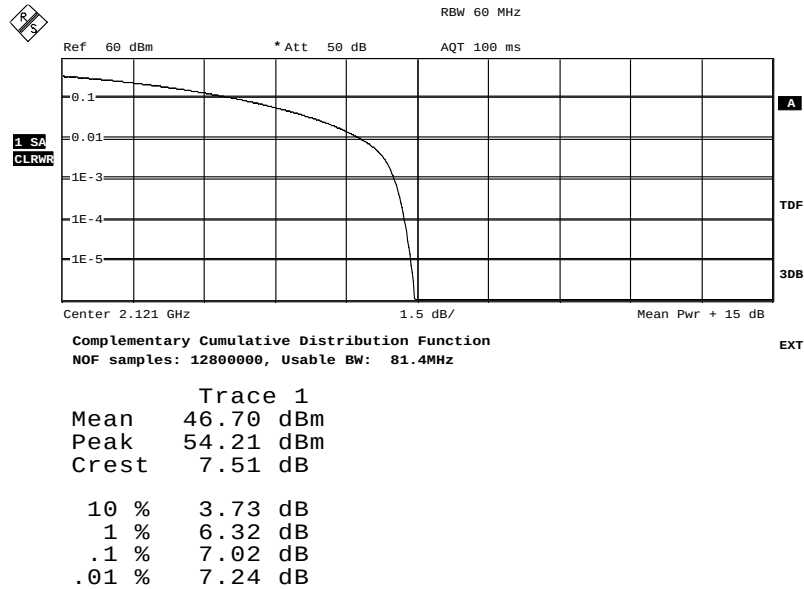

Date: 29.NOV.2012 13:39:47


Diagram 18:

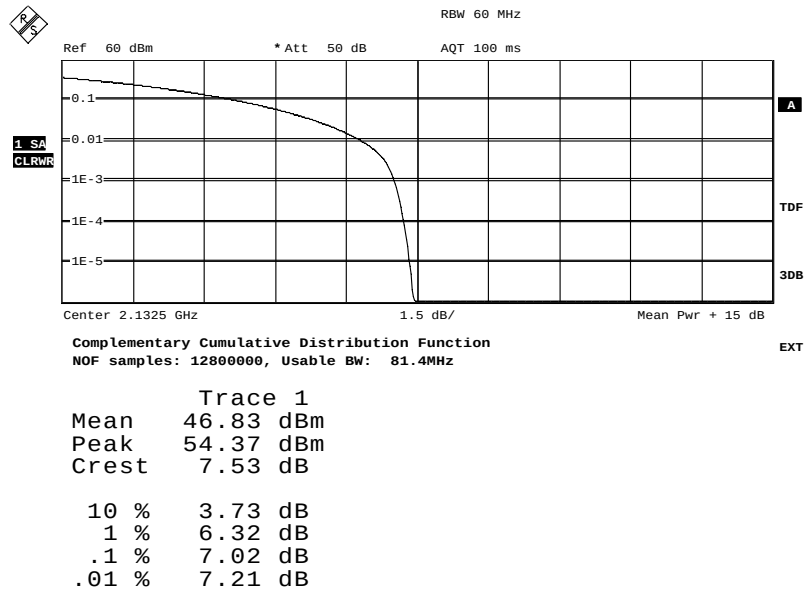

Date: 29.NOV.2012 14:21:59


Appendix 2

Diagram 19:

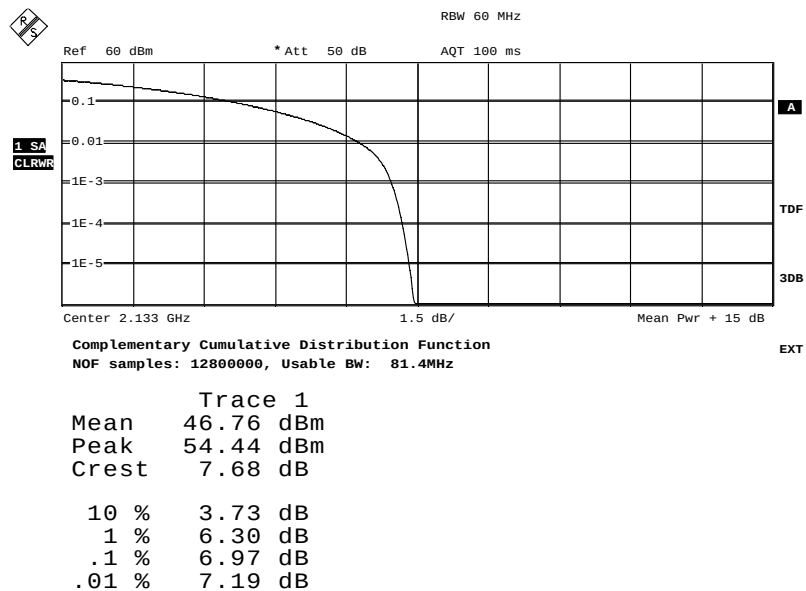

Date: 29.NOV.2012 14:35:52


Diagram 20:

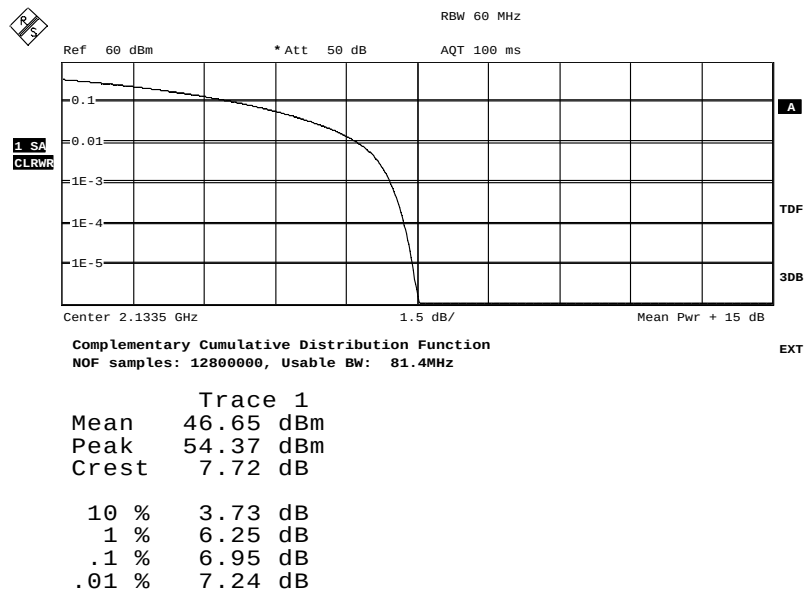

Date: 29.NOV.2012 15:08:15

Appendix 2

Diagram 21:

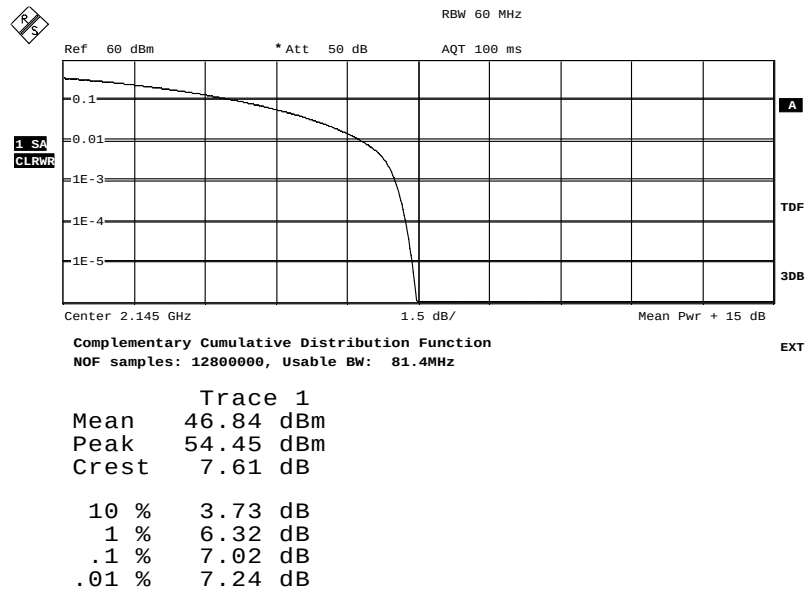

Date: 29.NOV.2012 13:52:53

Appendix 3

Occupied bandwidth measurements according to 47 CFR 2.1049 / RSS-Gen 4.6.1

Date	Temperature	Humidity
2012-11-26	23 °C ± 3 °C	32 % ± 5 %
2012-11-28	23 °C ± 3 °C	31 % ± 5 %
2012-11-29	23 °C ± 3 °C	19 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a signal analyzer with the RMS detector activated. The signal analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	504 159
RF attenuator	901 384
RF attenuator	900 233
Directional coupler	901 496
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

LTE:

Diagram	BW Configuration [MHz]	Tested Frequency	Tested Port	Occupied BW (99%) [MHz]
1	1.4 MHz	M	RUS 1, primary linked	1.09
2	1.4 MHz	M	RUS 1, secondary linked	1.09
3	3 MHz	M	RUS 1, primary linked	2.69
4	5 MHz	M	RUS 1, primary linked	4.48
5	10 MHz	M	RUS 1, primary linked	8.94
6	15 MHz	M	RUS 1, primary linked	13.42
7	20 MHz	M	RUS 1, primary linked	17.88
8	20 MHz	M	RUS 1, secondary linked	17.88


Appendix 3

WCDMA:

Diagram	BW Configuration [MHz]	Tested Frequency	Tested Port	Occupied BW (99%) [MHz]
9	5 MHz	M	RUS 1, primary linked	4.17
10	5 MHz	M	RUS 1,secondary linked	4.17


Appendix 3

Diagram 1:

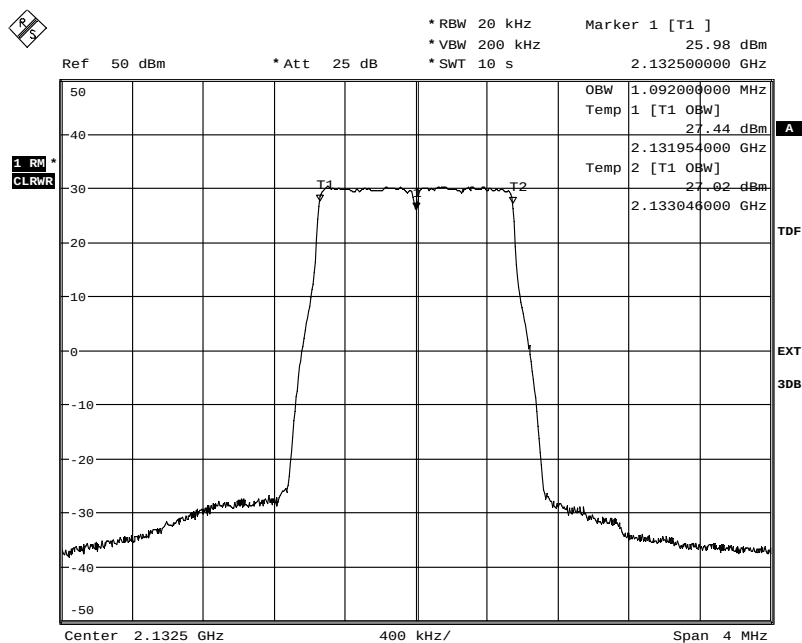

Date: 26.NOV.2012 10:19:31


Diagram 2:

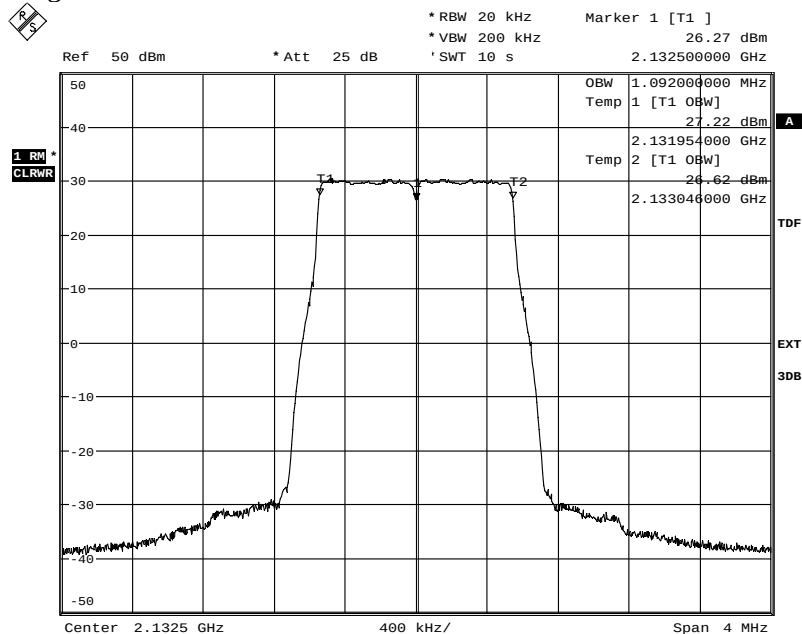

Date: 26.NOV.2012 12:02:35


Appendix 3

Diagram 3:

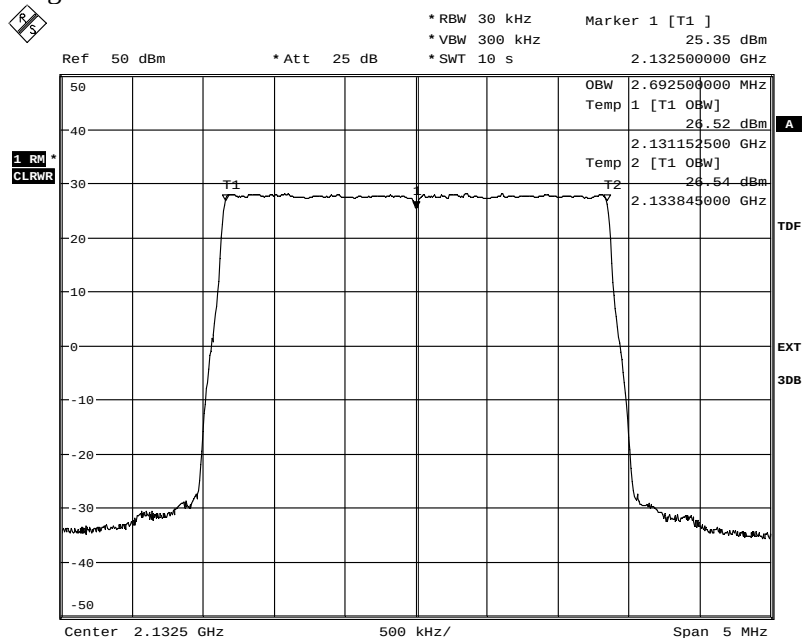

Date: 26.NOV.2012 10:25:10


Diagram 4:

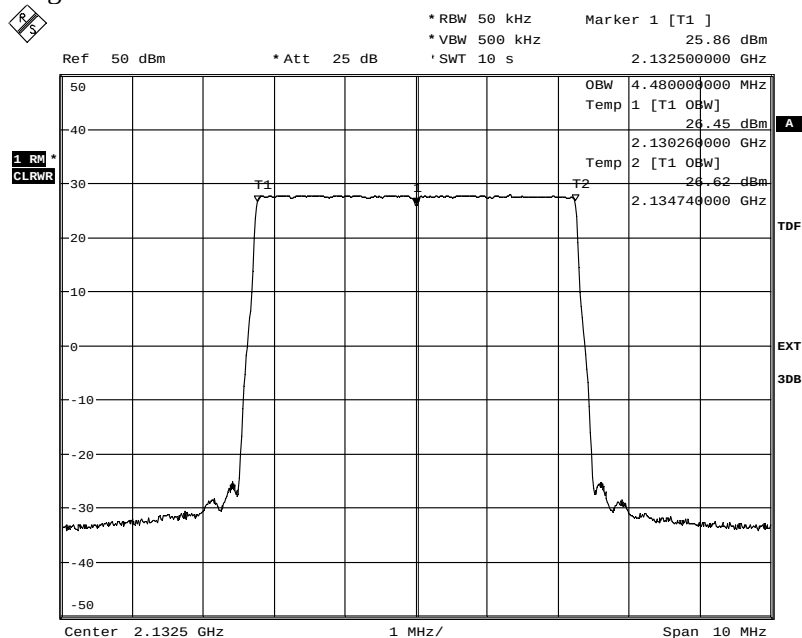

Date: 26.NOV.2012 10:34:26


Appendix 3

Diagram 5:

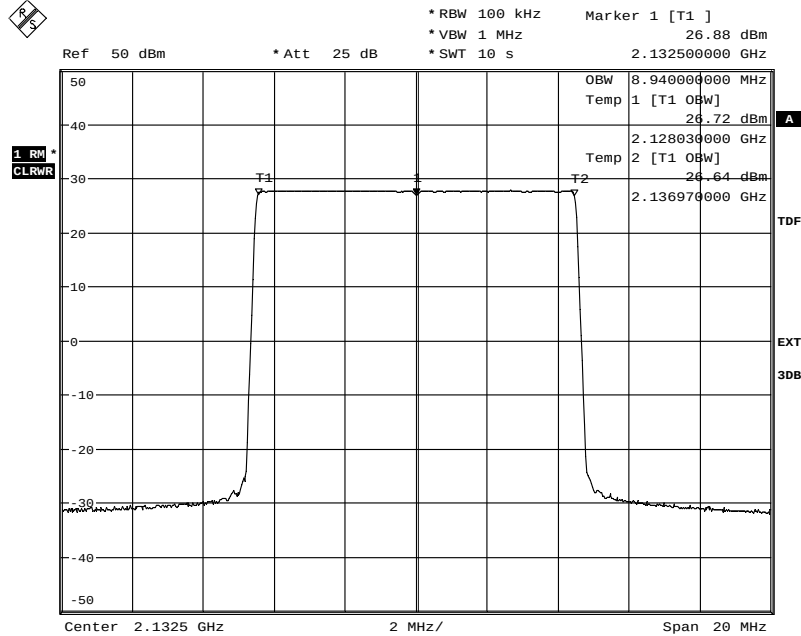

Date: 26.NOV.2012 10:37:26


Diagram 6:

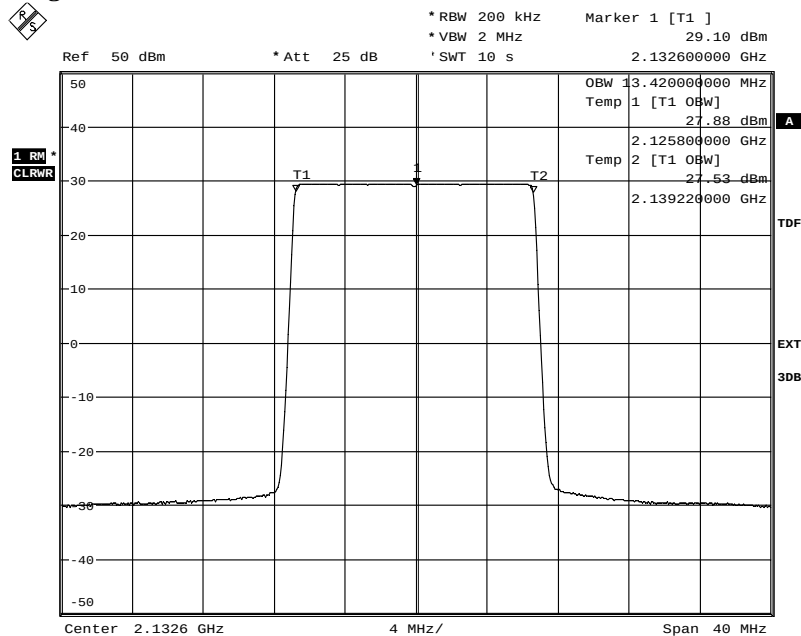

Date: 26.NOV.2012 10:43:26


Appendix 3

Diagram 7:

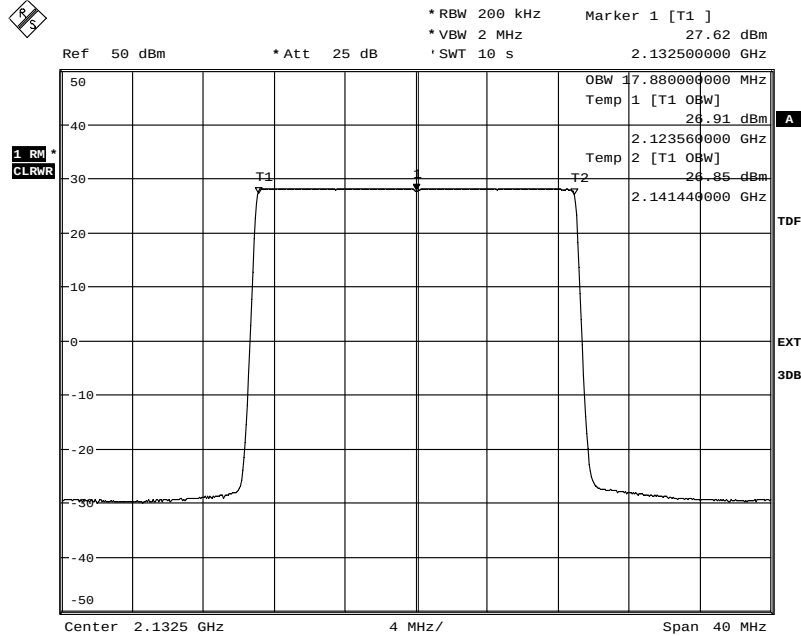

Date: 26.NOV.2012 10:16:13


Diagram 8:

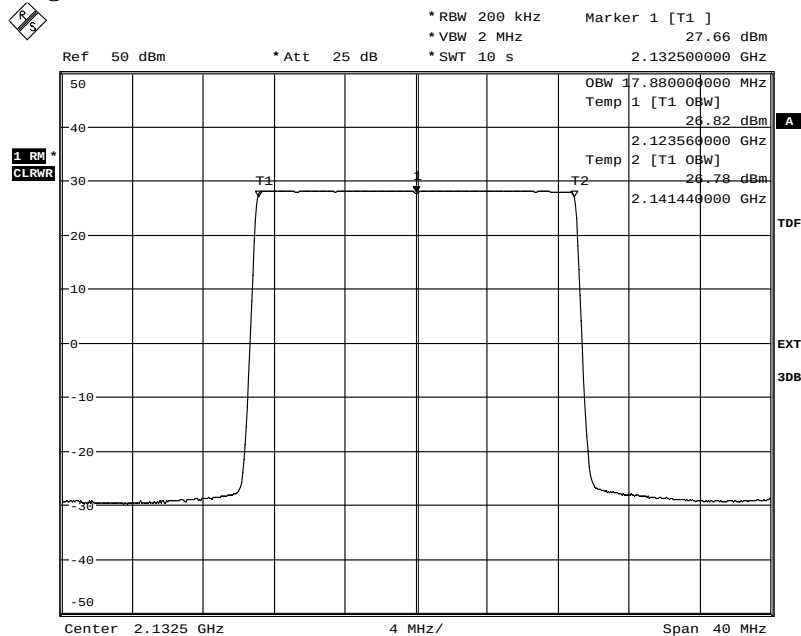

Date: 26.NOV.2012 11:48:46


Appendix 3

Diagram 9:

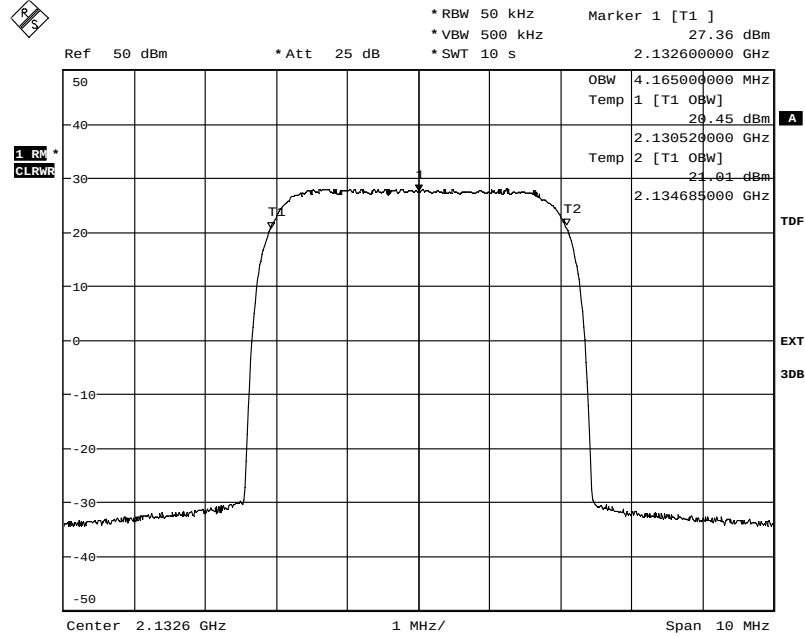

Date: 28.NOV.2012 13:46:53

Diagram 10:

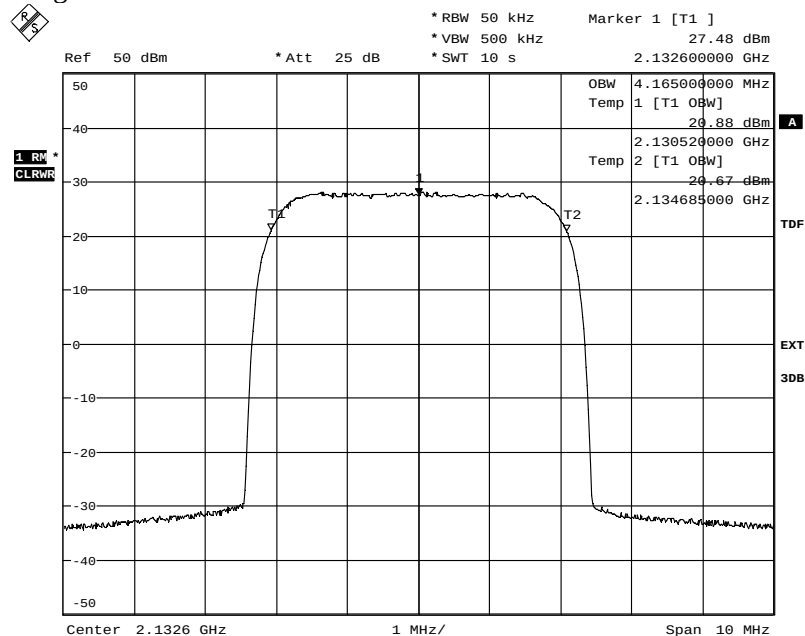

Date: 29.NOV.2012 09:10:45

Appendix 4

Band edge measurements according to CFR 47 §27.53(h) / IC RSS-139 6.5

Date	Temperature	Humidity
2012-11-26	23 °C ± 3 °C	32 % ± 5 %
2012-11-27	23 °C ± 3 °C	28 % ± 5 %
2012-11-28	23 °C ± 3 °C	31 % ± 5 %
2012-12-03	23 °C ± 3 °C	16 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §27.53(h). The test object was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements. The FCC rules, specifying a RBW of at least 1% of the fundamental emission bandwidth up to 1 MHz away from the band edges and a RBW of 1 MHz for measurements of emissions more than 1 MHz away from the band edges. In cases where a smaller RBW was used than that specified by the rules, the limit was adjusted to compensate for the reduced RBW. In the frequency range up to 1 MHz away from the band edges the measured values of the emission bandwidth reported in tables below were used for the calculation of the limit.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method 2 “measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v01r02

LTE:

BW configuration	Emission BW [MHz]	RBW used	Adjusted limit [dBm]
1.4 MHz	1.12	10 kHz	-13.49
3 MHz	2.73	10 kHz	-17.37
5 MHz	4.54	30 kHz	-14.8
10 MHz	9.06	100 kHz	
15 MHz	13.64	200 kHz	
20 MHz	18.1	200 kHz	

WCDMA:

BW configuration	Emission BW [MHz]	RBW used	Adjusted limit [dBm]
5 MHz	4.37	30 kHz	-14.60

In the frequency ranges 2104 to 2109 and 2156-2161 MHz a RBW of 100 kHz were used instead of 1 MHz, in this case the limit has been adjusted to -23 dBm

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	504 159
RF attenuator	901 384
RF attenuator	900 233
Directional coupler	901 496
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB.

Appendix 4

Results

LTE

Diagram	BW configuration	Tested frequency	Tested Port
1 a+c	1.4 MHz	B	RUS 1, primary linked
2 a+c	1.4 MHz	B	RUS 1, secondary linked
3 a+c	3 MHz	B	RUS 1, primary linked
4 a+c	5 MHz	B	RUS 1, primary linked
5 a+c	10 MHz	B	RUS 1, primary linked
6 a+c	15 MHz	B	RUS 1, primary linked
7 a+c	20 MHz	B	RUS 1, primary linked
8 a+c	20 MHz	B	RUS 1, secondary linked
9 a+c	1.4 MHz	T	RUS 1, primary linked
10 a+c	1.4 MHz	T	RUS 1, secondary linked
11 a+c	3 MHz	T	RUS 1, primary linked
12 a+c	5 MHz	T	RUS 1, primary linked
13 a+c	10 MHz	T	RUS 1, primary linked
14 a+c	15 MHz	T	RUS 1, primary linked
15 a+c	20 MHz	T	RUS 1, primary linked
16 a+c	20 MHz	T	RUS 1, secondary linked

WCDMA:

Diagram	Tested frequency	Tested port
17 a-c	B+(B+5)	RUS 1, primary linked
18 a-c	B+(B+5)	RUS 1, secondary linked
19 a-c	T+(T-5)	RUS 1, primary linked
20 a-c	T+(T-5)	RUS 1, secondary linked
21 a-c	B	RUS 1, primary linked
22 a-c	B	RUS 1, secondary linked
23 a-c	T	RUS 1, primary linked
24 a-c	T	RUS 1, secondary linked

Limits


CFR 47 §27.53(h) and RSS-139 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----


Appendix 4

Diagram 1a:

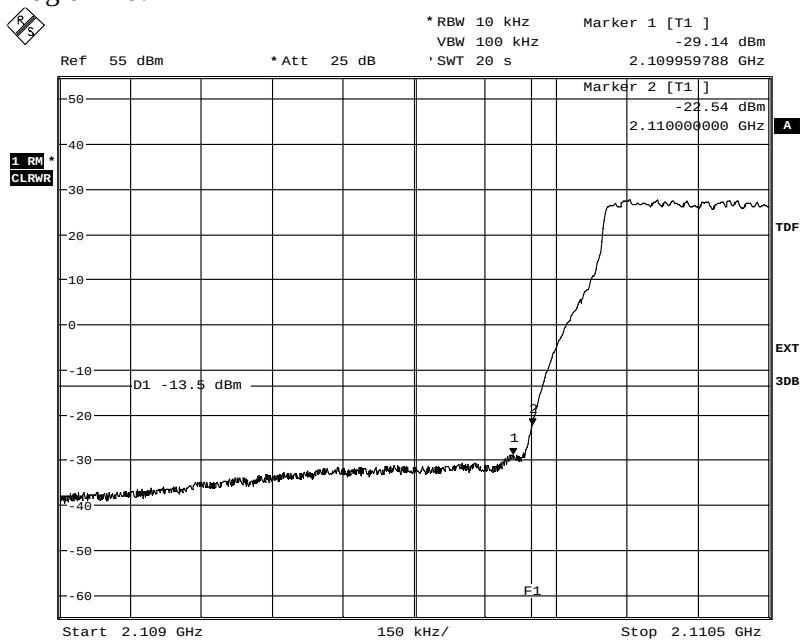

Date: 26.NOV.2012 12:45:05


Diagram 1b:

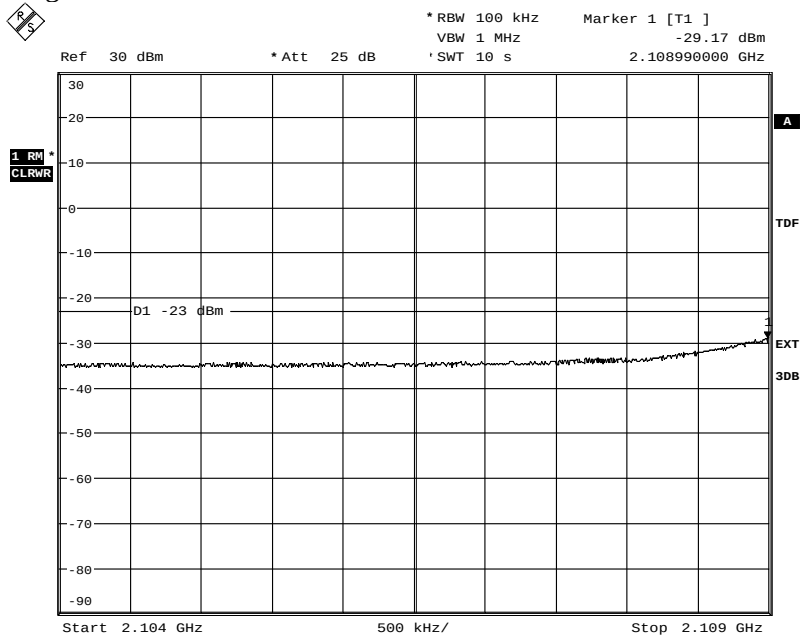

Date: 26.NOV.2012 12:50:02

Appendix 4


Diagram 1c

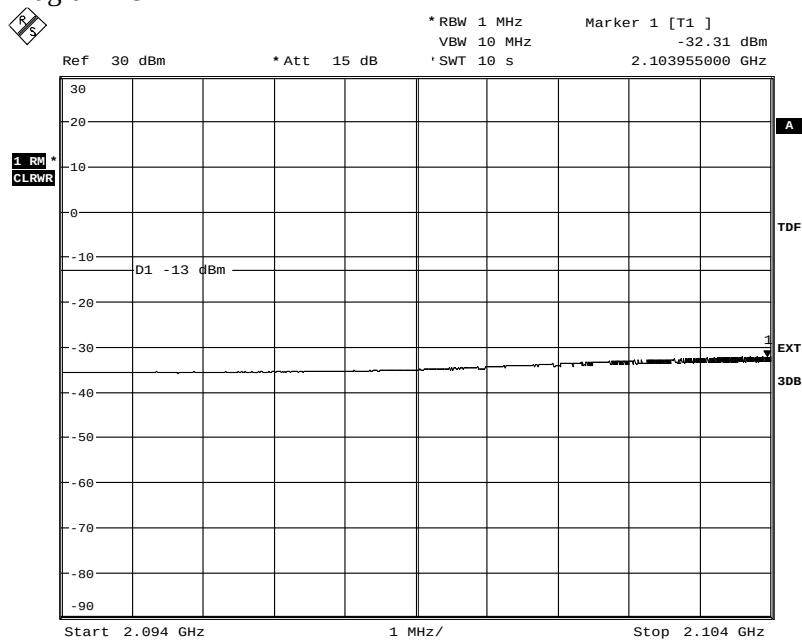

Date: 26.NOV.2012 12:56:14


Appendix 4

Diagram 2a:

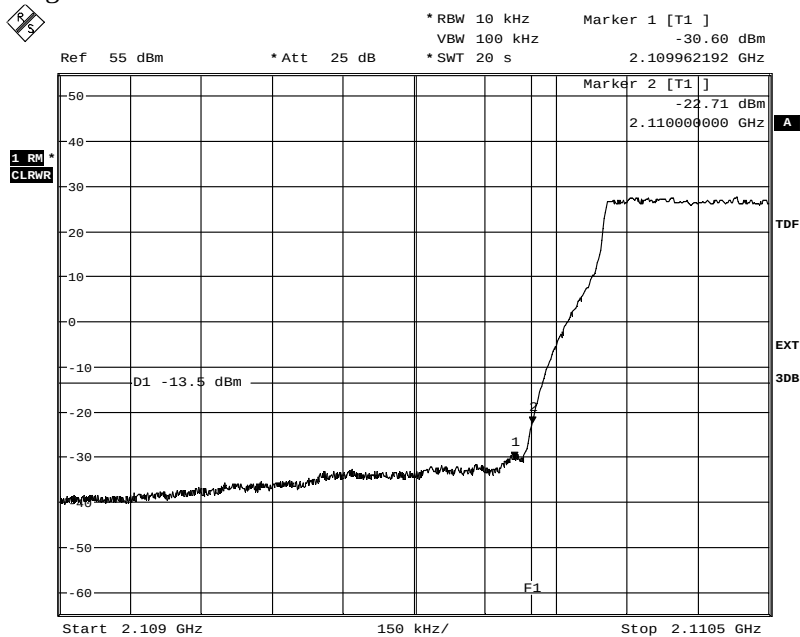

Date: 26.NOV.2012 13:50:19


Diagram 2b:

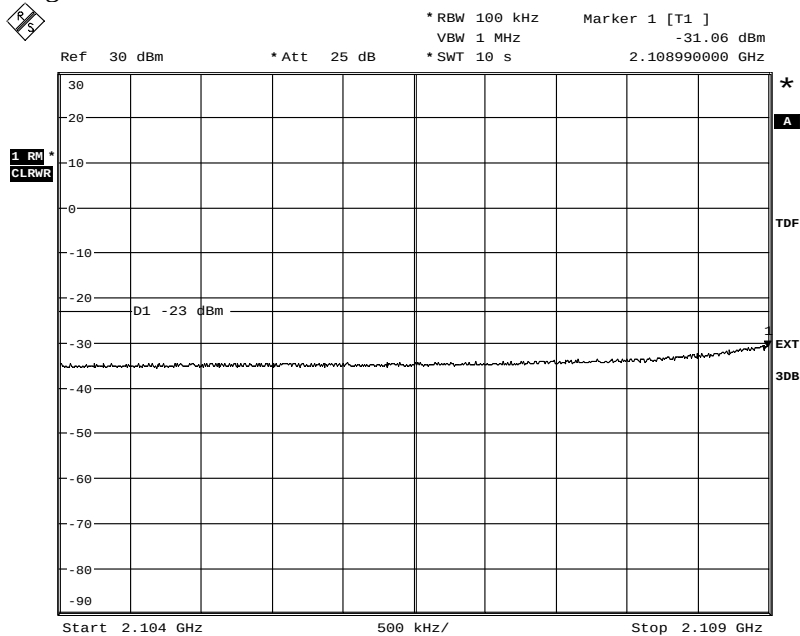

Date: 26.NOV.2012 13:46:43

Appendix 4


Diagram 2c:

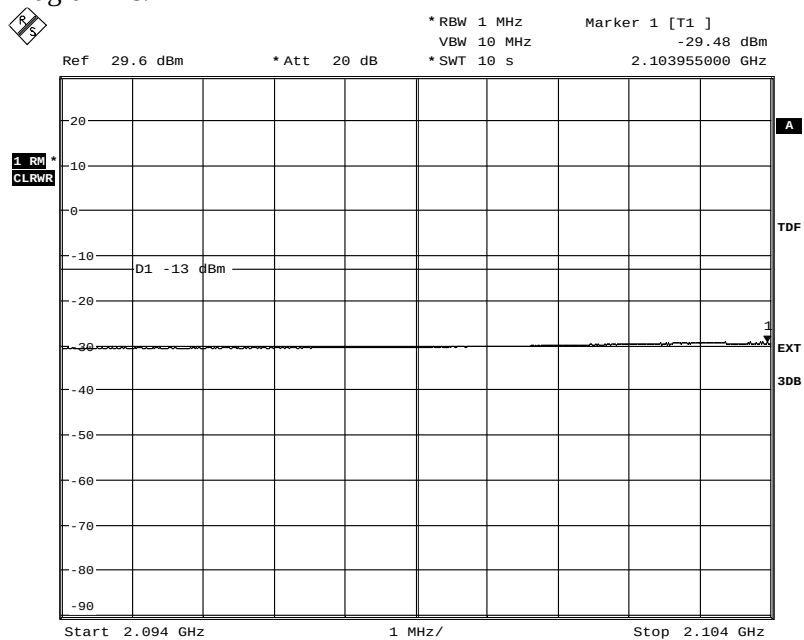

Date: 26.NOV.2012 13:45:40


Appendix 4

Diagram 3a:

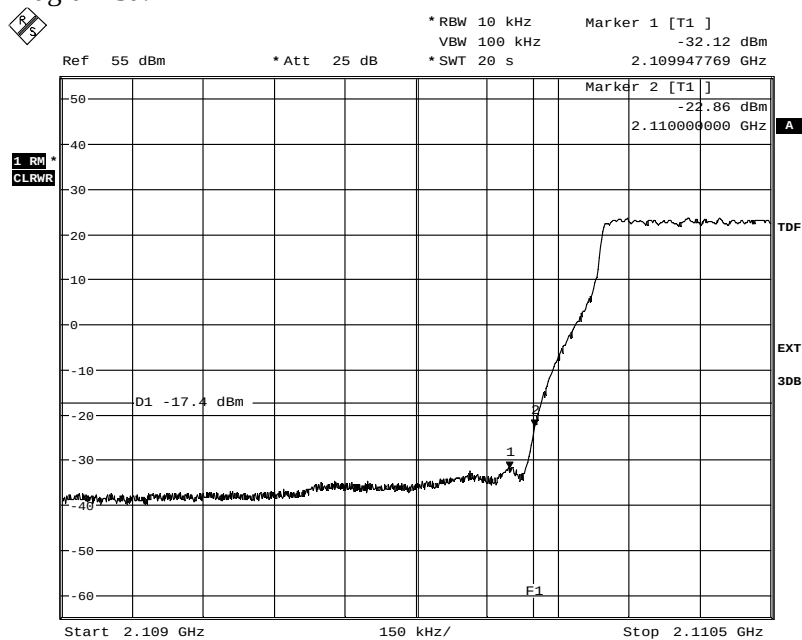

Date: 26.NOV.2012 13:05:47


Diagram 3b:

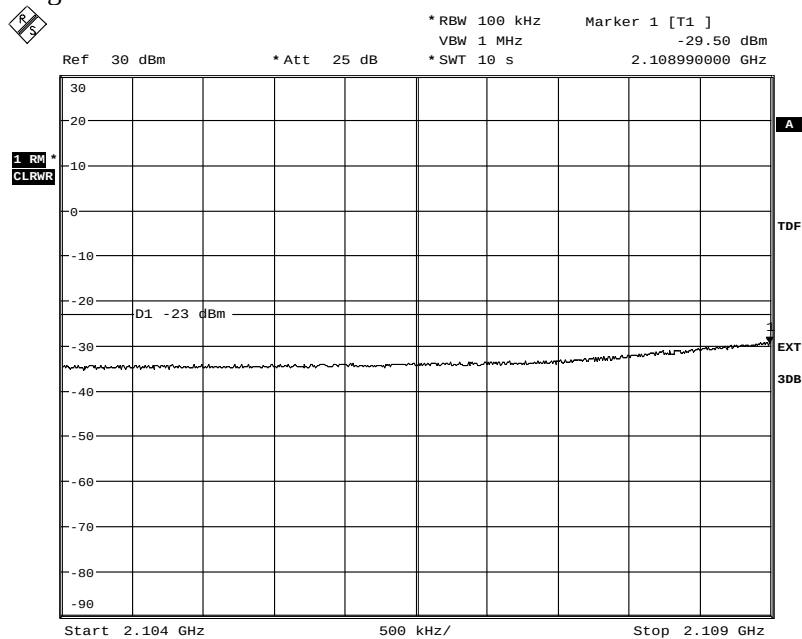

Date: 26.NOV.2012 13:02:22

Appendix 4


Diagram 3c:

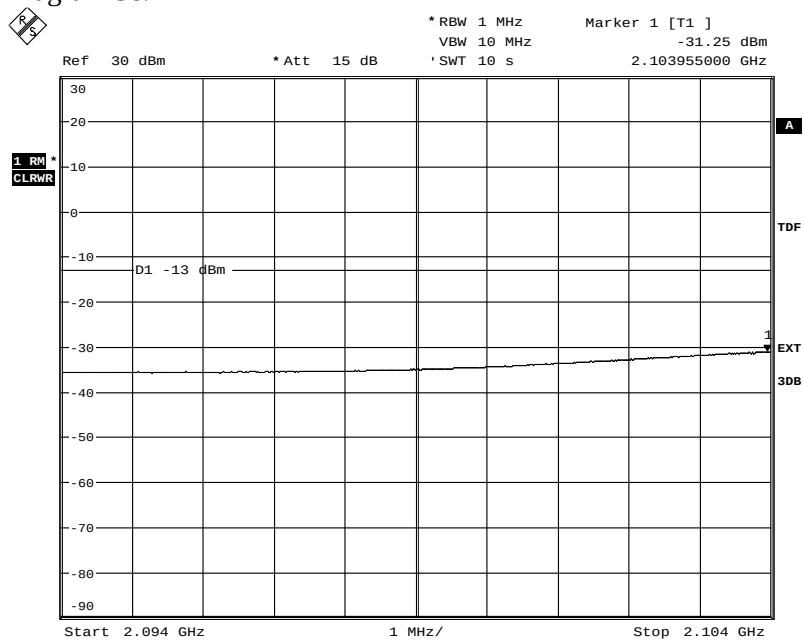

Date: 26.NOV.2012 12:59:19


Appendix 4

Diagram 4a:

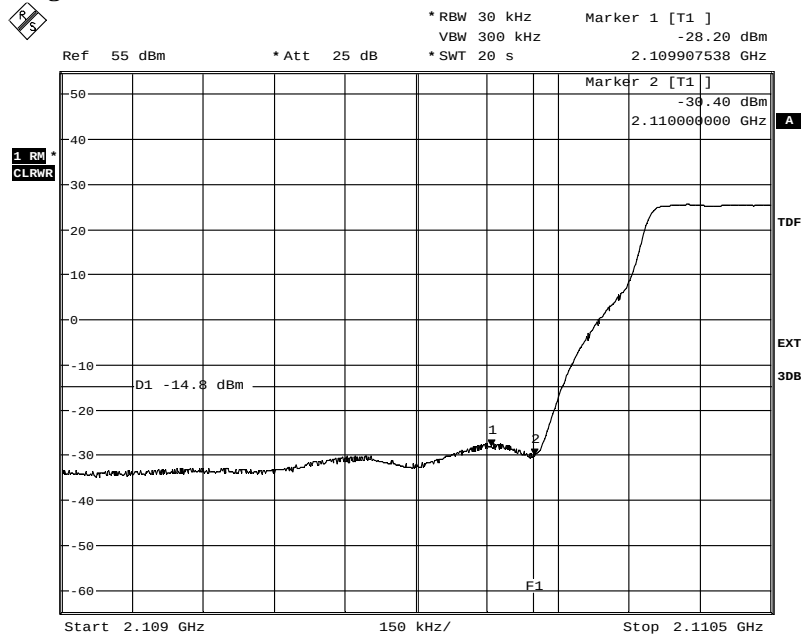

Date: 26.NOV.2012 13:10:53


Diagram 4b:

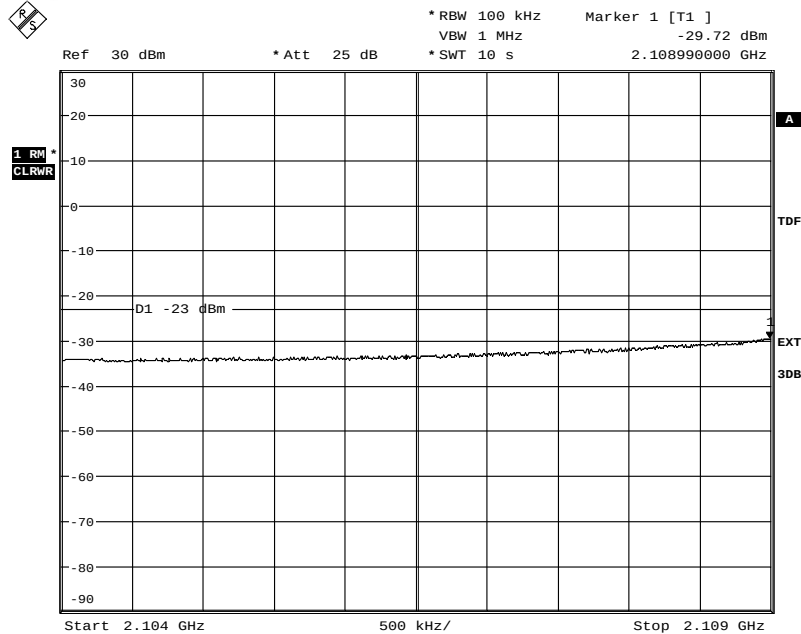

Date: 26.NOV.2012 13:12:01

Appendix 4


Diagram 4c:

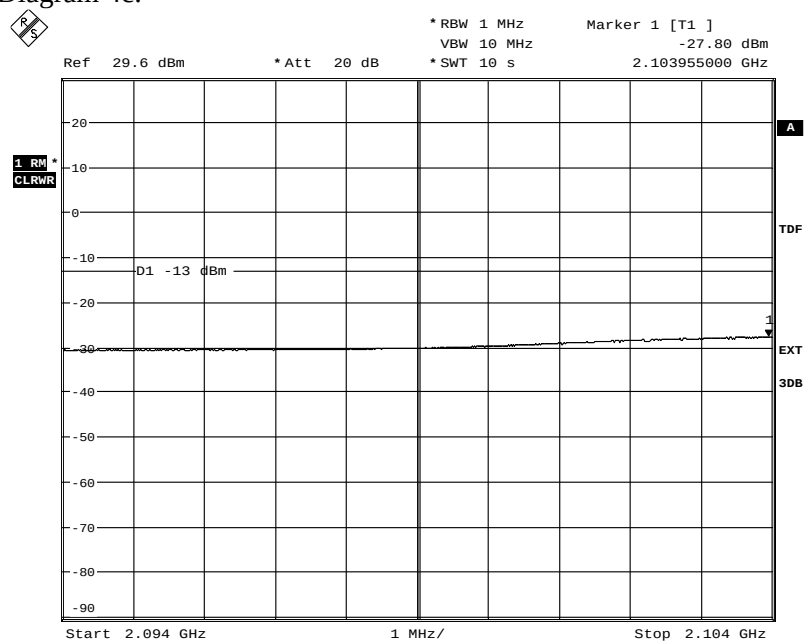

Date: 26.NOV.2012 13:15:05


Appendix 4

Diagram 5a:

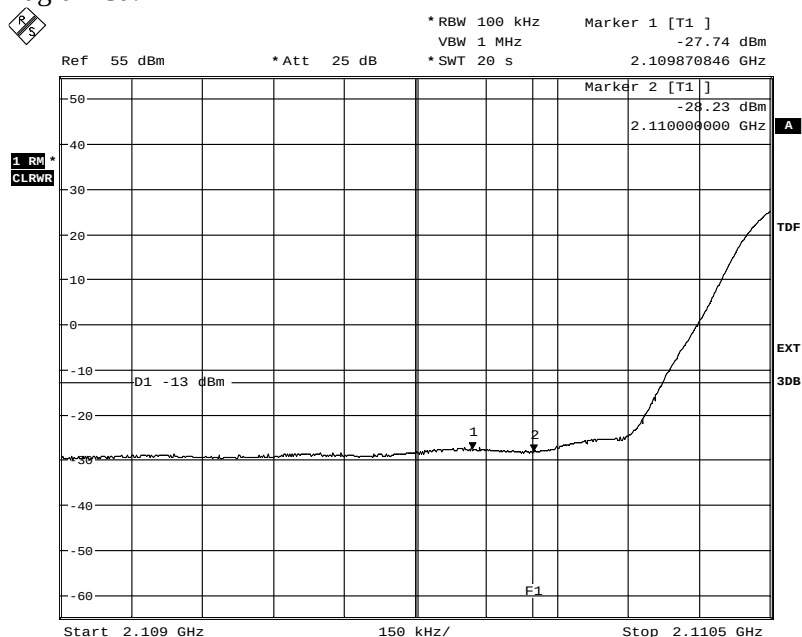

Date: 26.NOV.2012 13:20:52


Diagram 5b:

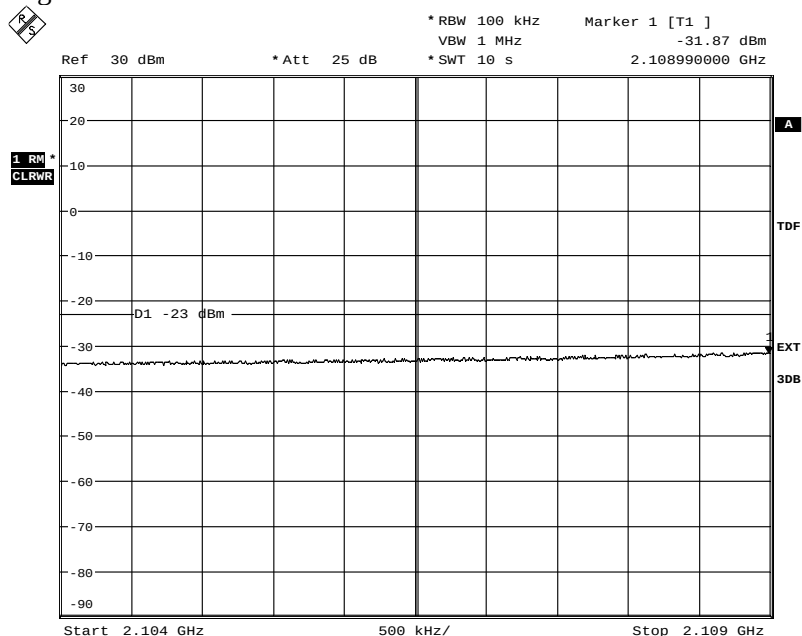

Date: 26.NOV.2012 13:19:37

Appendix 4


Diagram 5c:

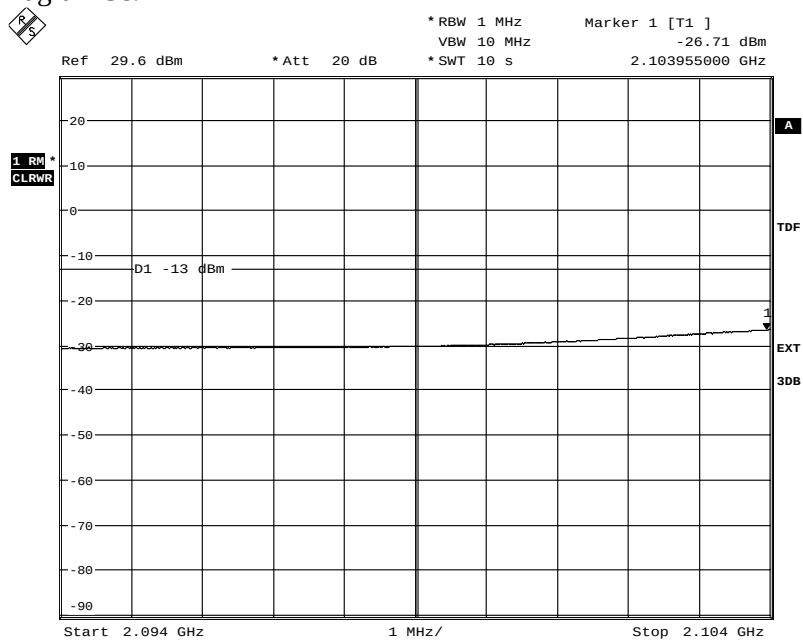

Date: 26.NOV.2012 13:17:11


Appendix 4

Diagram 6a:

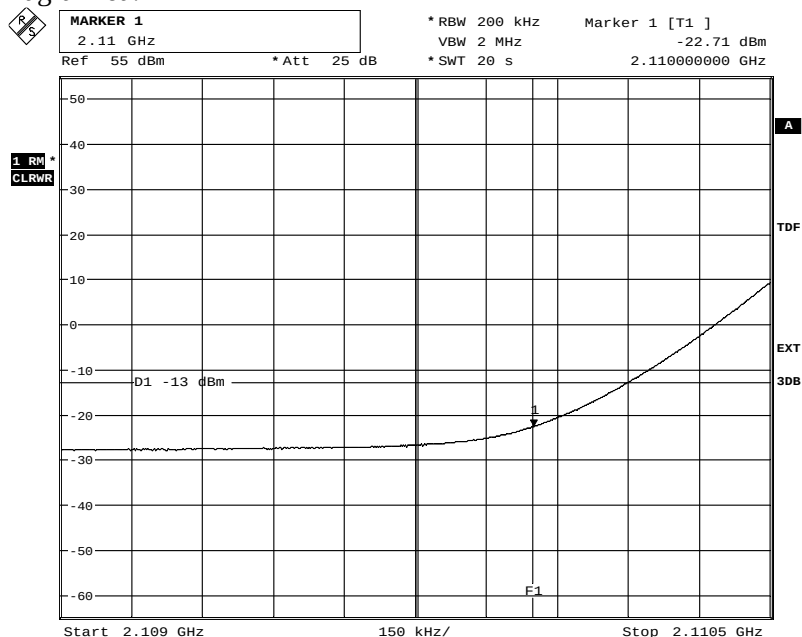

Date: 26.NOV.2012 13:26:36


Diagram 6b:

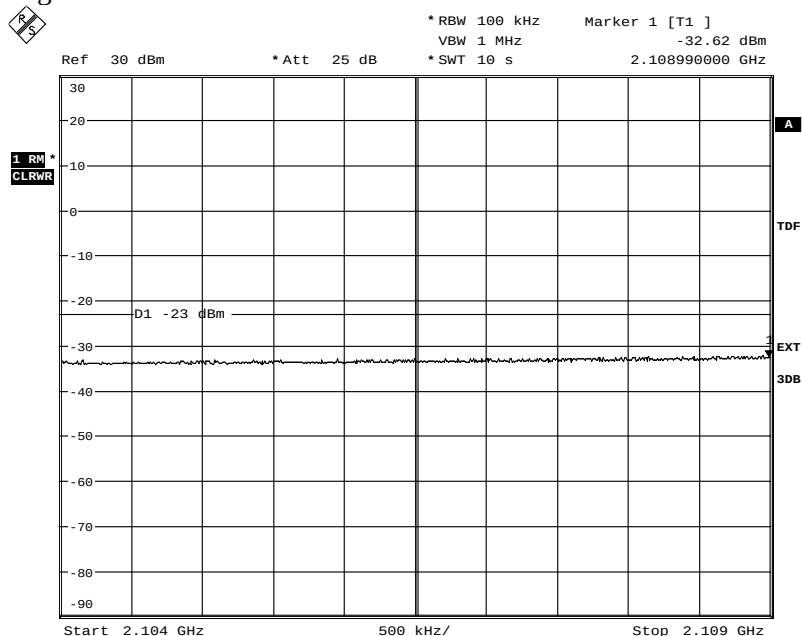

Date: 26.NOV.2012 13:28:27

Appendix 4


Diagram 6c:

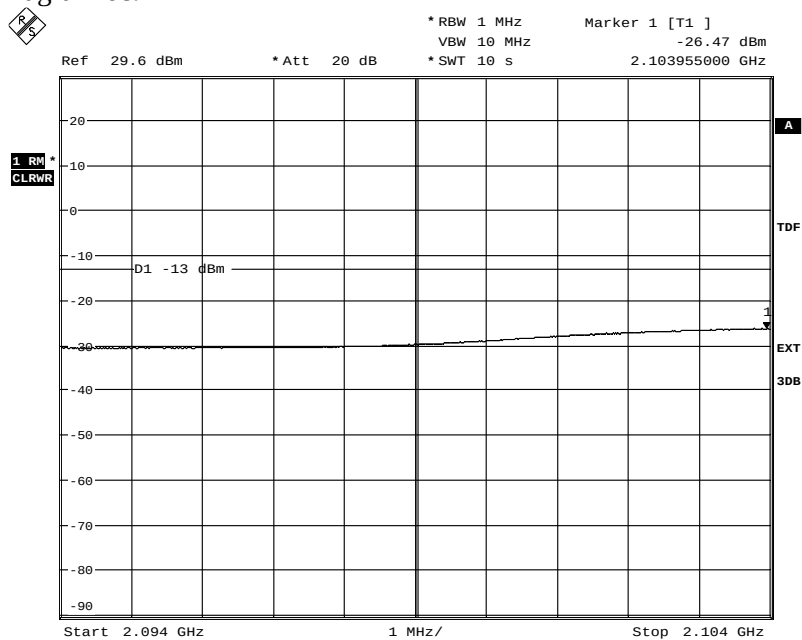

Date: 26.NOV.2012 13:30:15


Appendix 4

Diagram 7a:

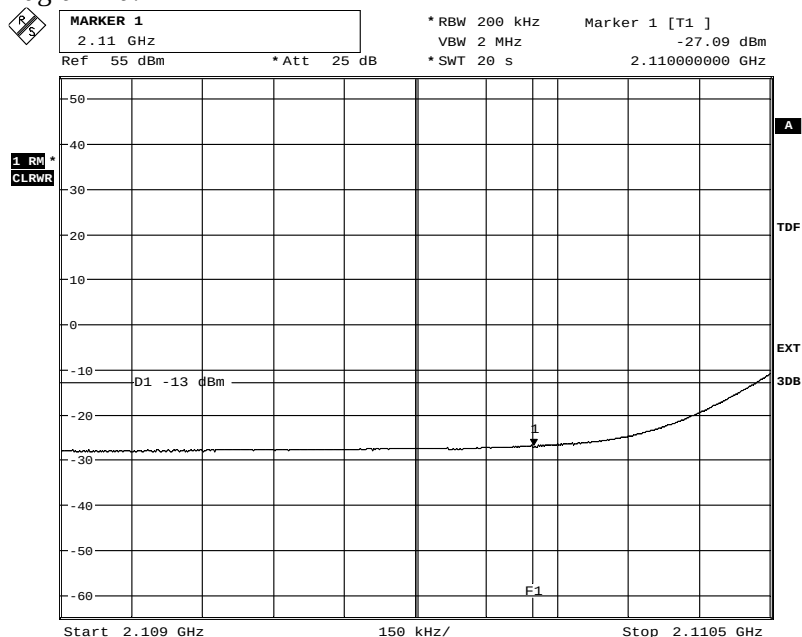

Date: 26.NOV.2012 13:35:30


Diagram 7b:

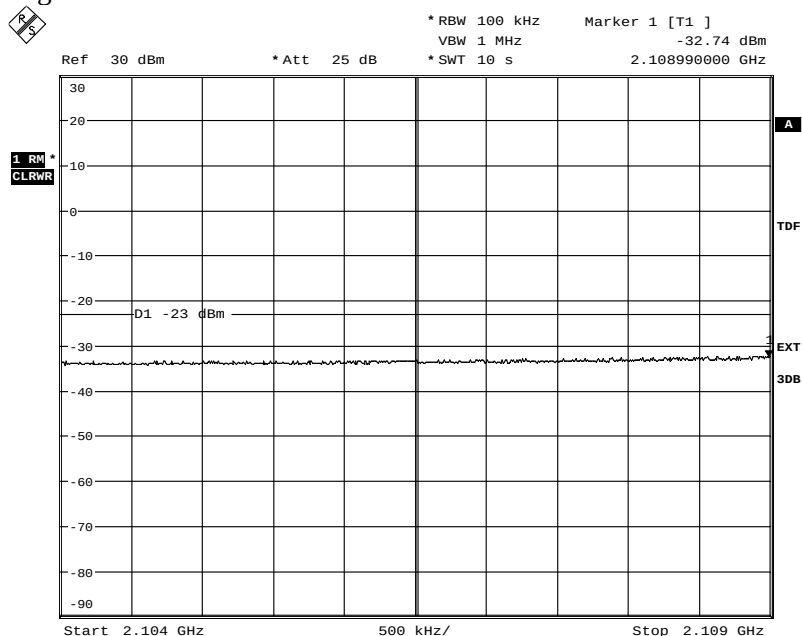

Date: 26.NOV.2012 13:34:10

Appendix 4


Diagram 7c:

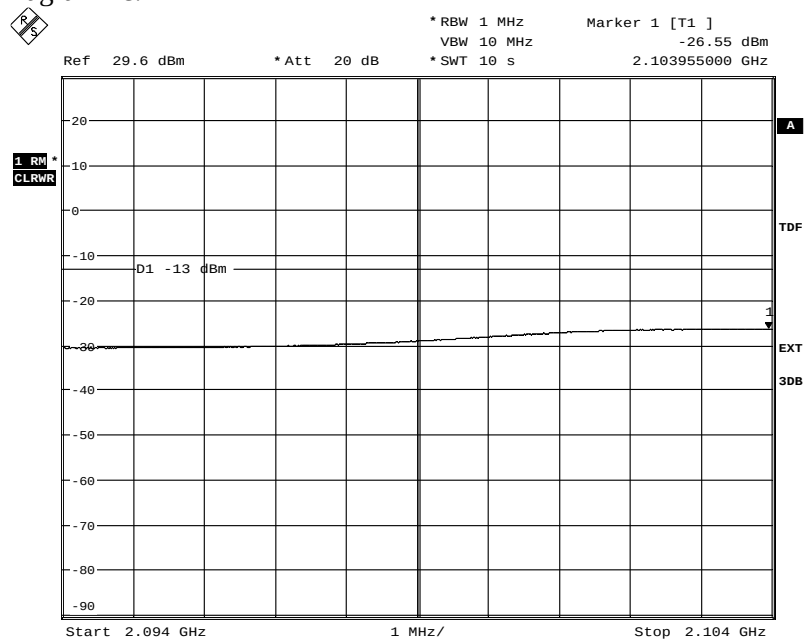

Date: 26.NOV.2012 13:33:13


Appendix 4

Diagram 8a: marker

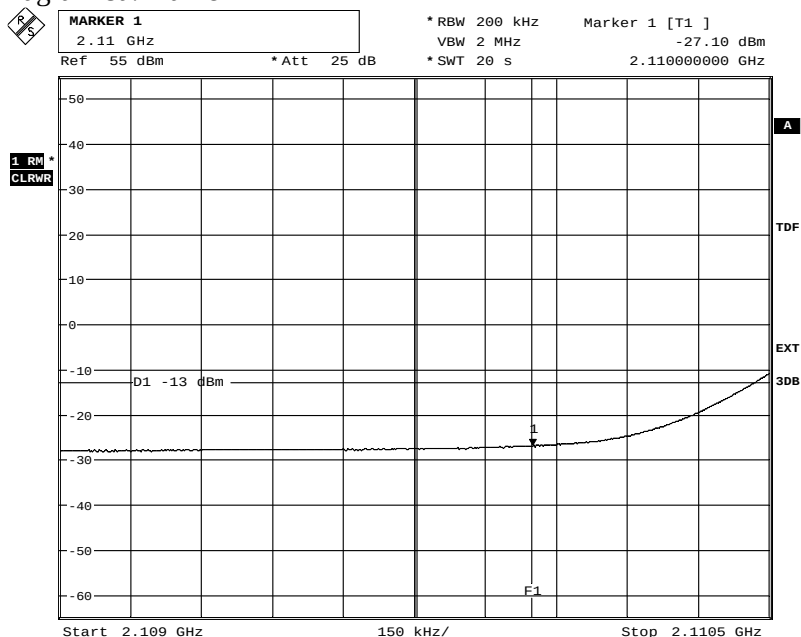

Date: 26.NOV.2012 13:38:53


Diagram 8b:

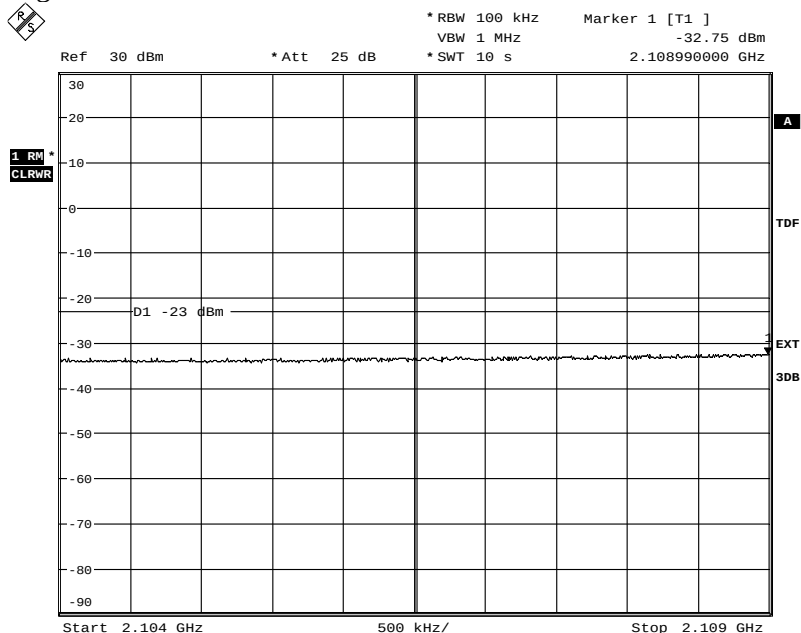

Date: 26.NOV.2012 13:40:03

Appendix 4


Diagram 8c:

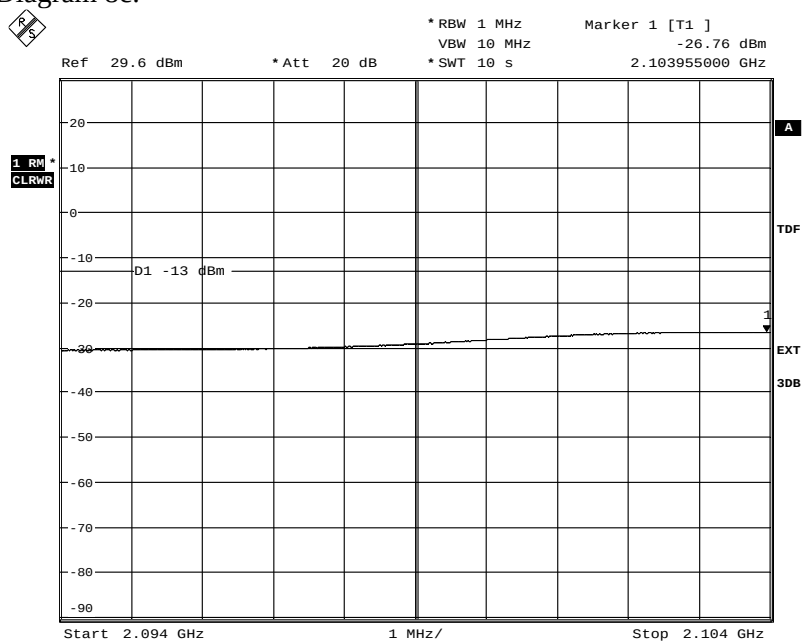

Date: 26.NOV.2012 13:41:41


Appendix 4

Diagram 9a:

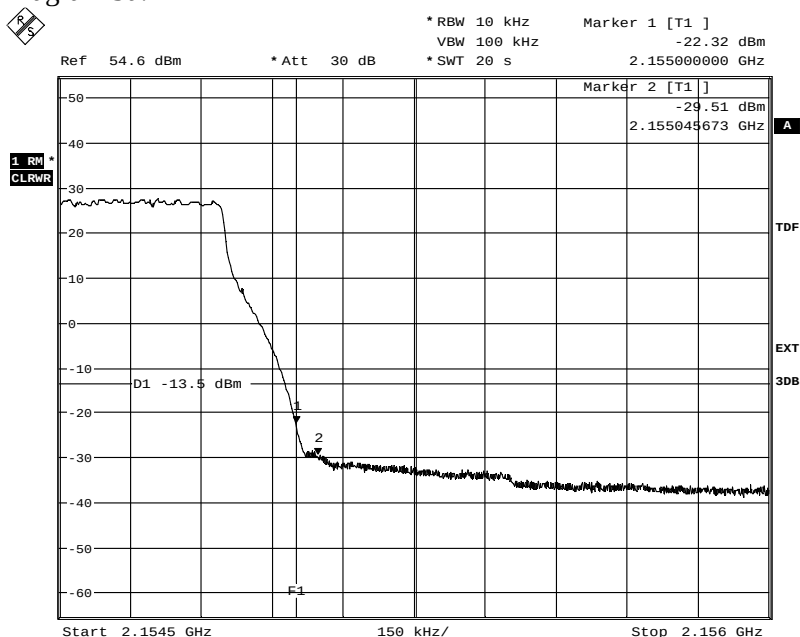

Date: 26.NOV.2012 14:50:54


Diagram 9b:

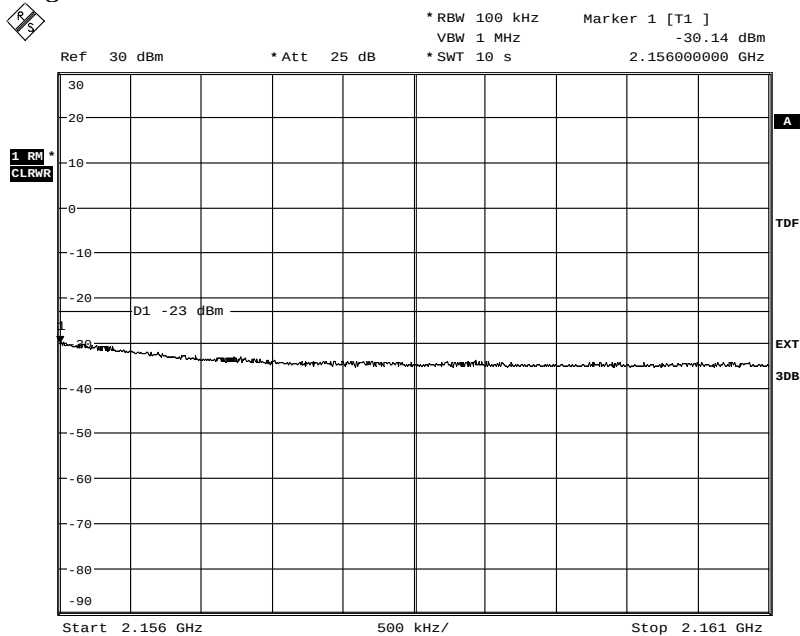

Date: 26.NOV.2012 14:48:10

Appendix 4


Diagram 9c

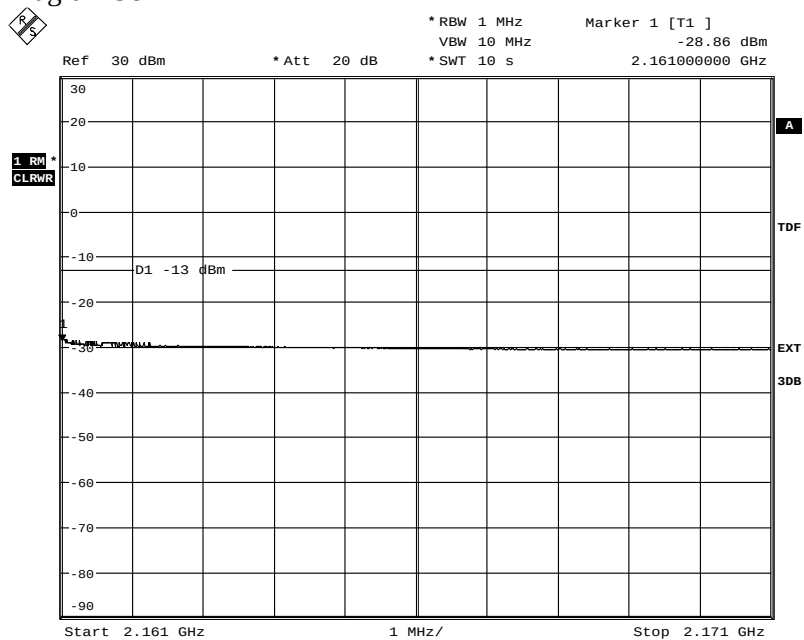

Date: 26.NOV.2012 14:46:55


Appendix 4

Diagram 10a:

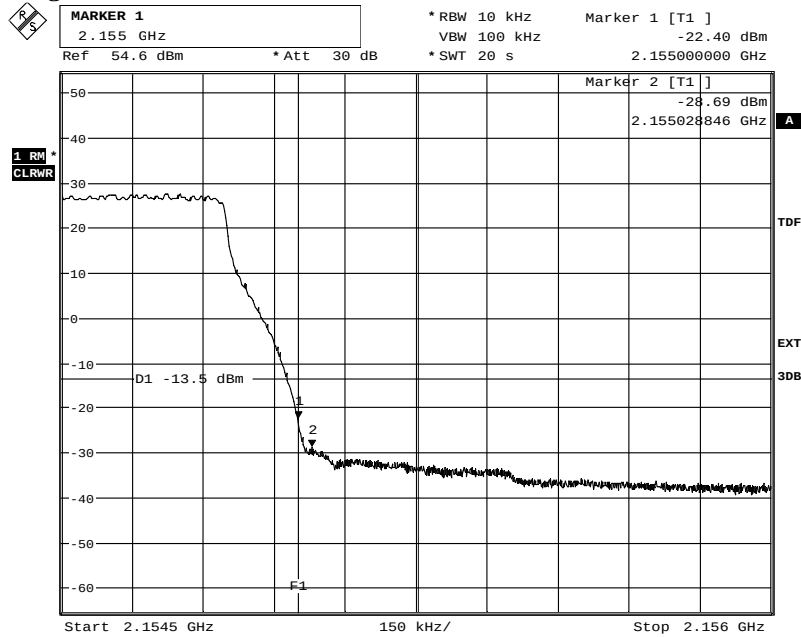

Date: 26.NOV.2012 13:55:47


Diagram 10b:

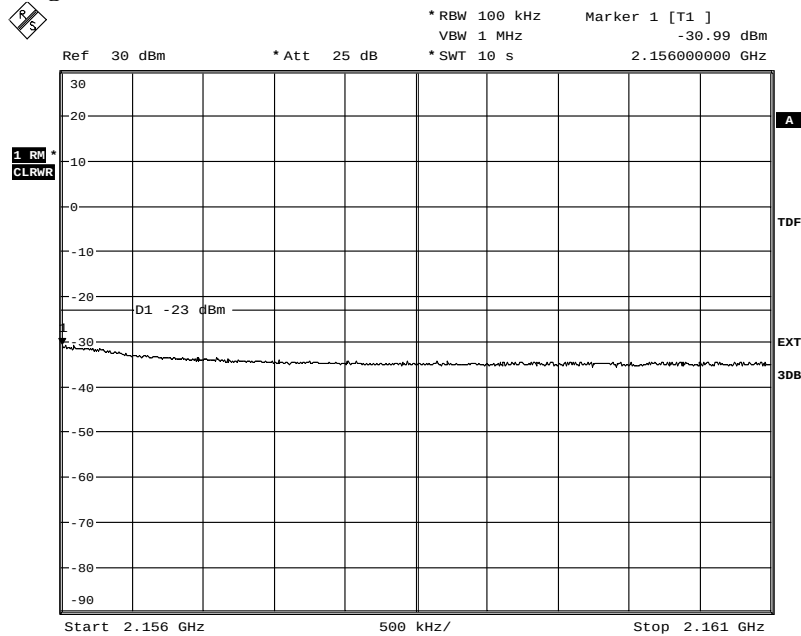

Date: 26.NOV.2012 14:01:26

Appendix 4


Diagram 10c:

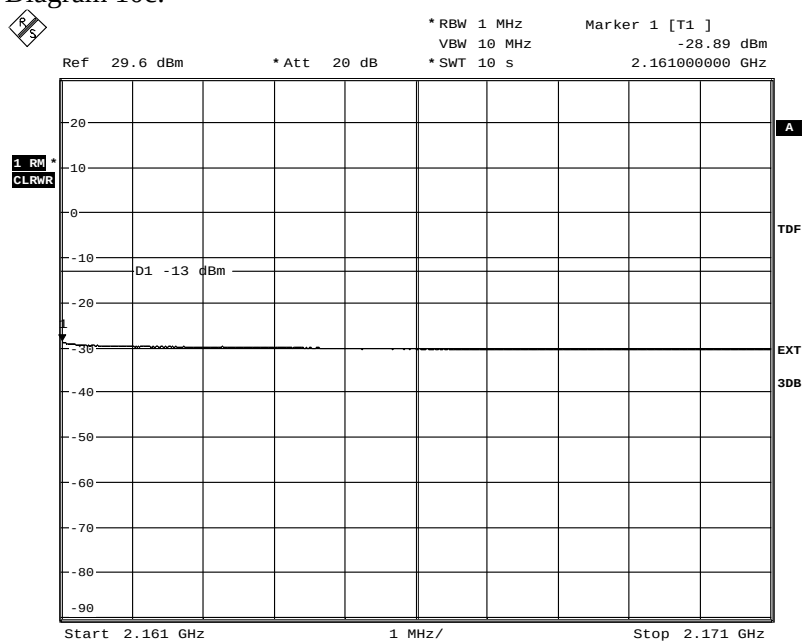

Date: 26.NOV.2012 14:03:18


Appendix 4

Diagram 11a:

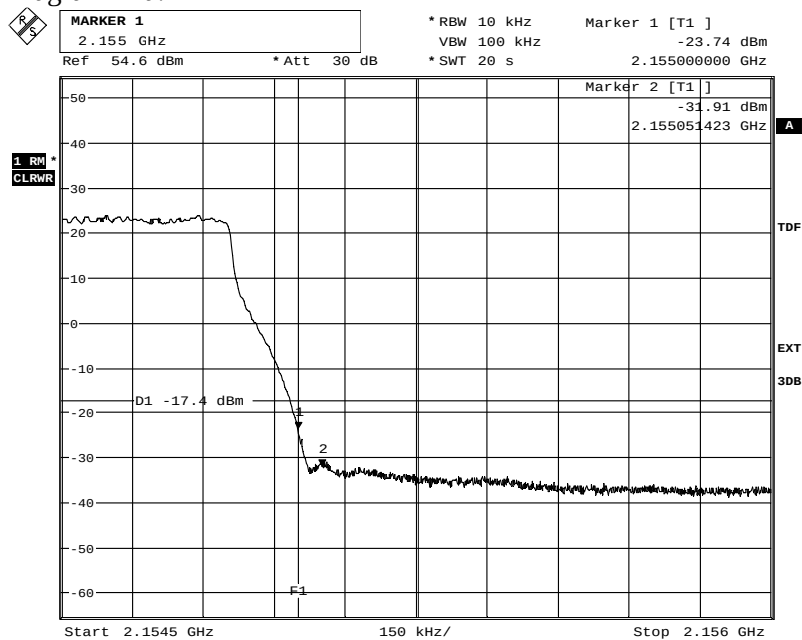

Date: 26.NOV.2012 14:42:45


Diagram 11b:

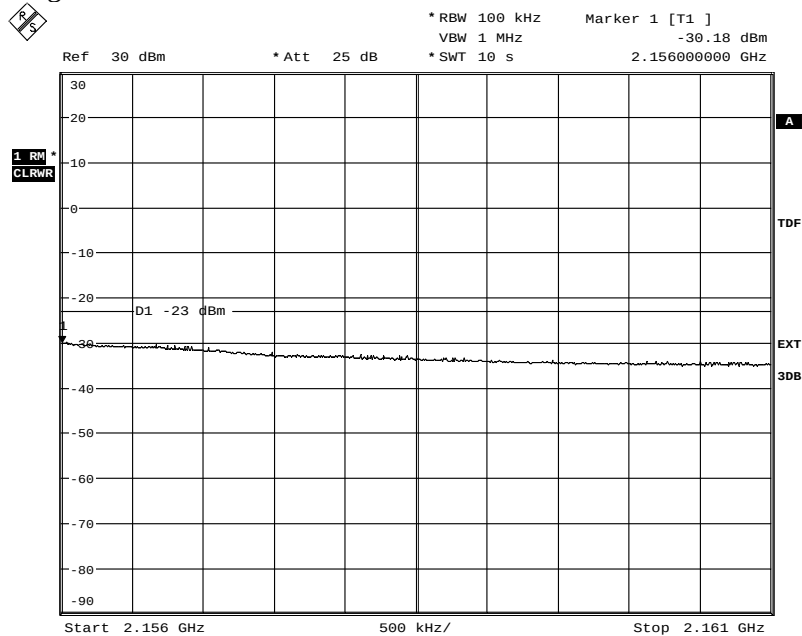

Date: 26.NOV.2012 14:44:16

Appendix 4


Diagram 11c:

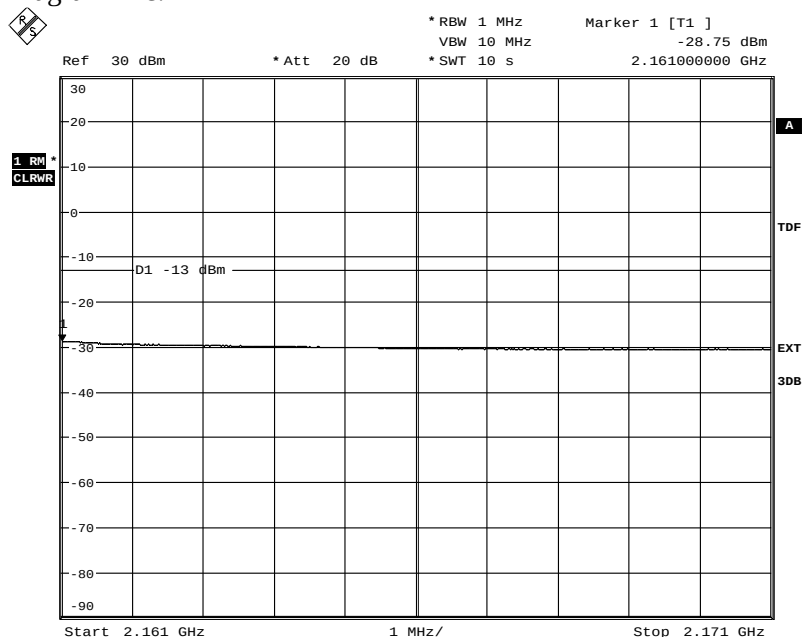

Date: 26.NOV.2012 14:44:58


Appendix 4

Diagram 12a:

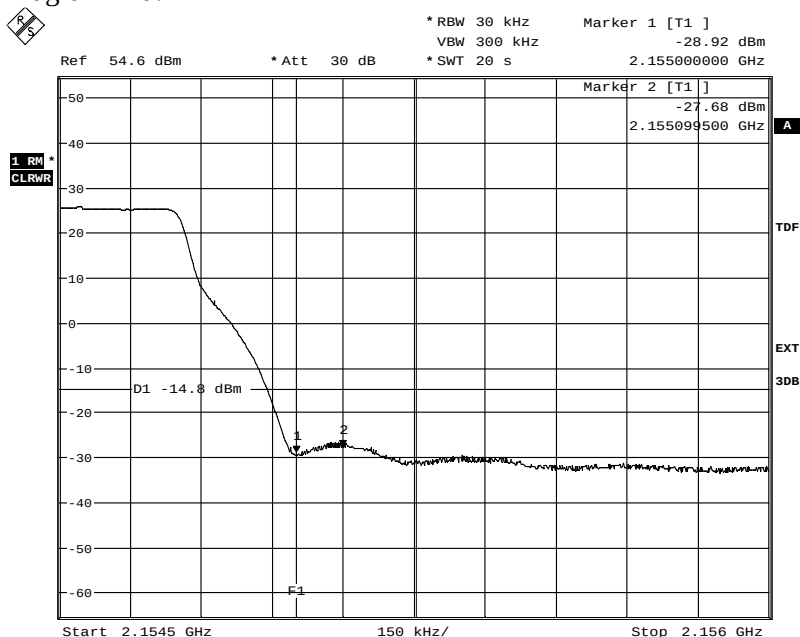

Date: 26.NOV.2012 14:38:07


Diagram 12b:

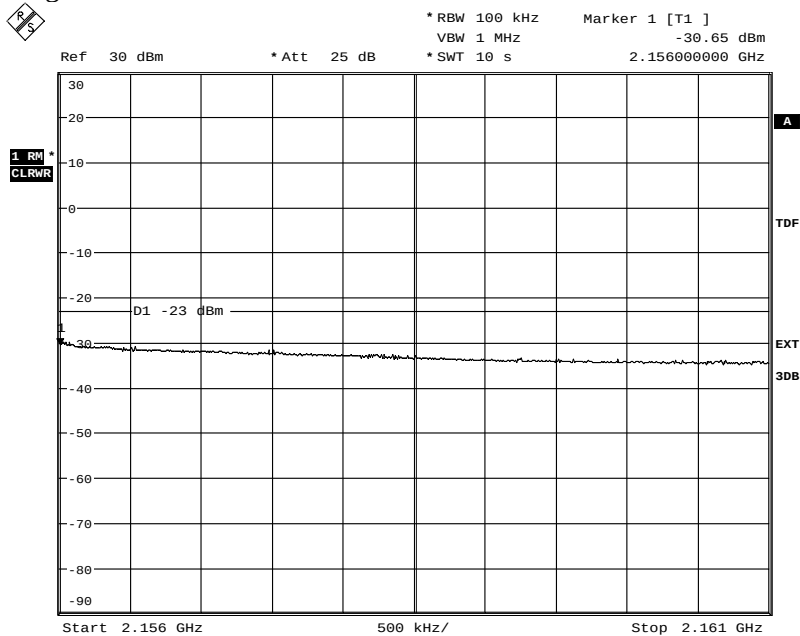

Date: 26.NOV.2012 14:35:43

Appendix 4


Diagram 12c:

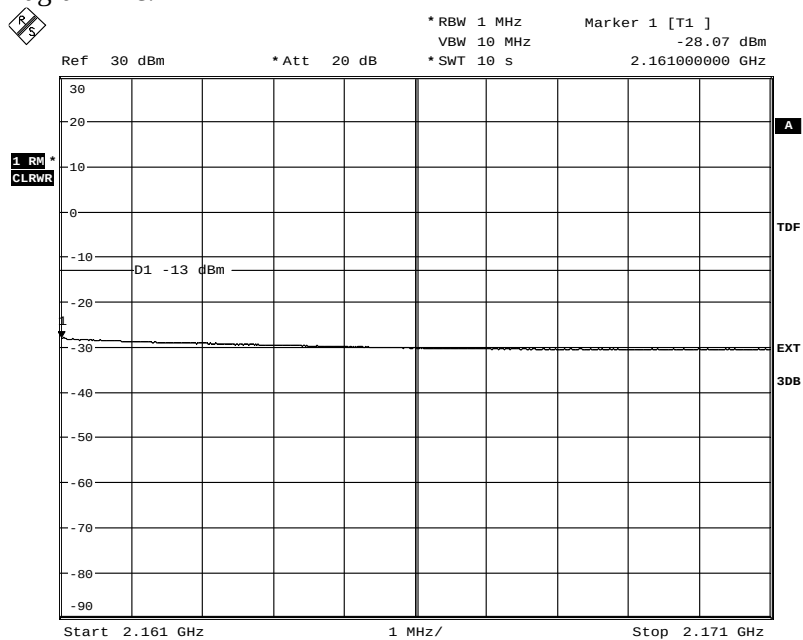

Date: 26.NOV.2012 14:34:26


Appendix 4

Diagram 13a:

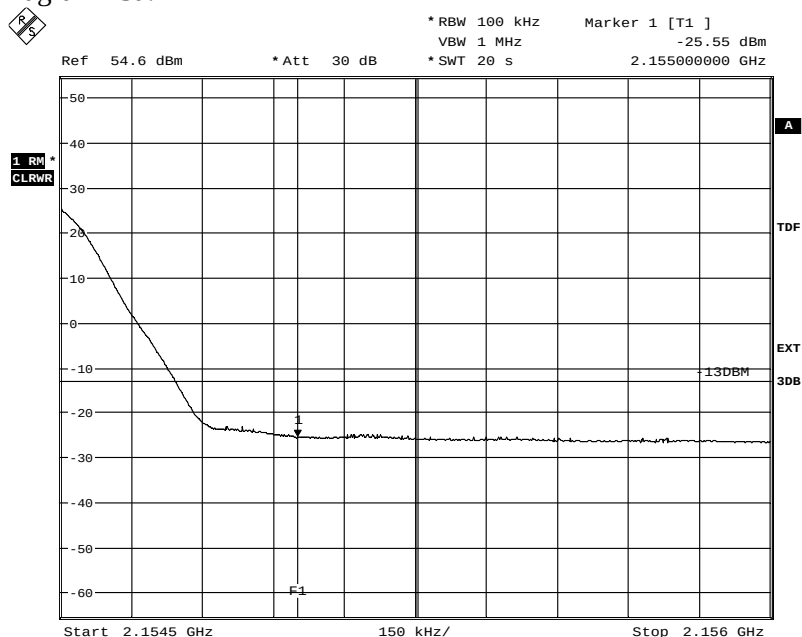

Date: 26.NOV.2012 14:30:12


Diagram 13b:

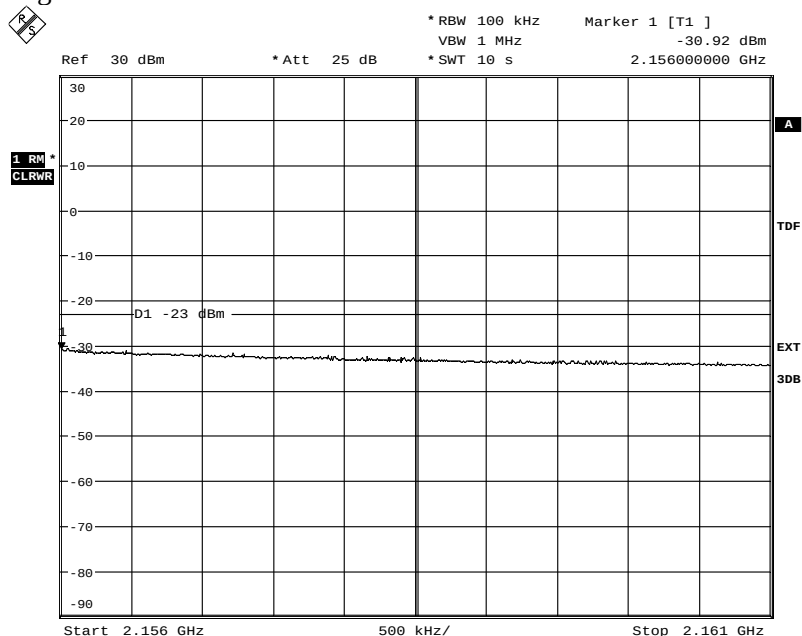

Date: 26.NOV.2012 14:31:26

Appendix 4


Diagram 13c:

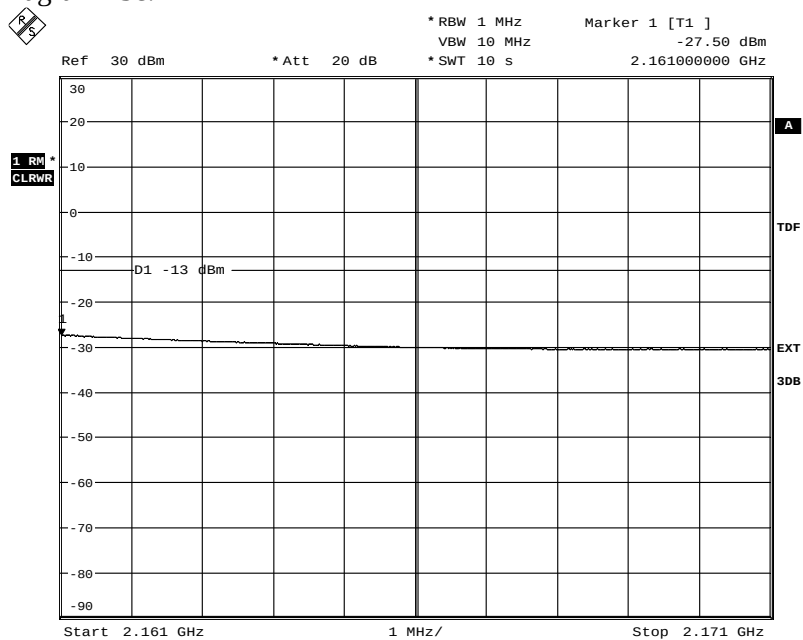

Date: 26.NOV.2012 14:32:29


Appendix 4

Diagram 14a:

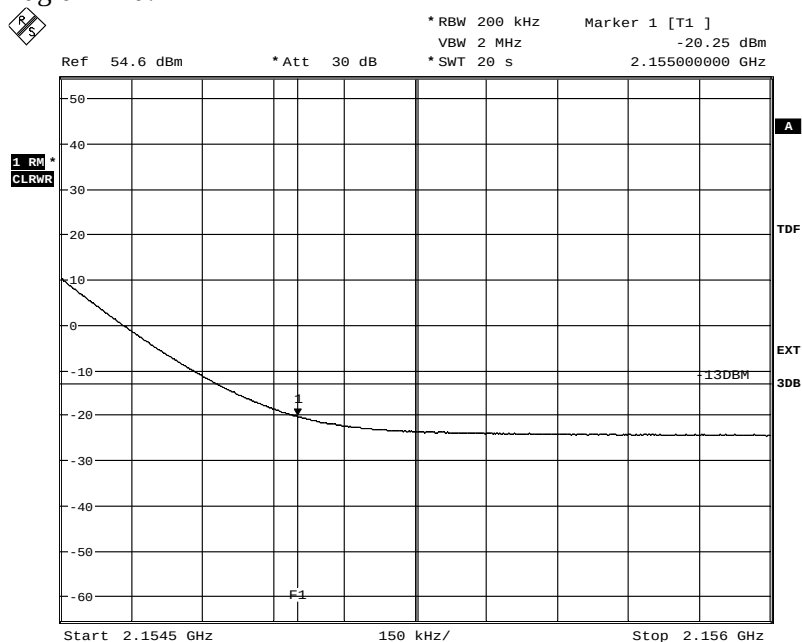

Date: 26.NOV.2012 14:27:31


Diagram 14b:

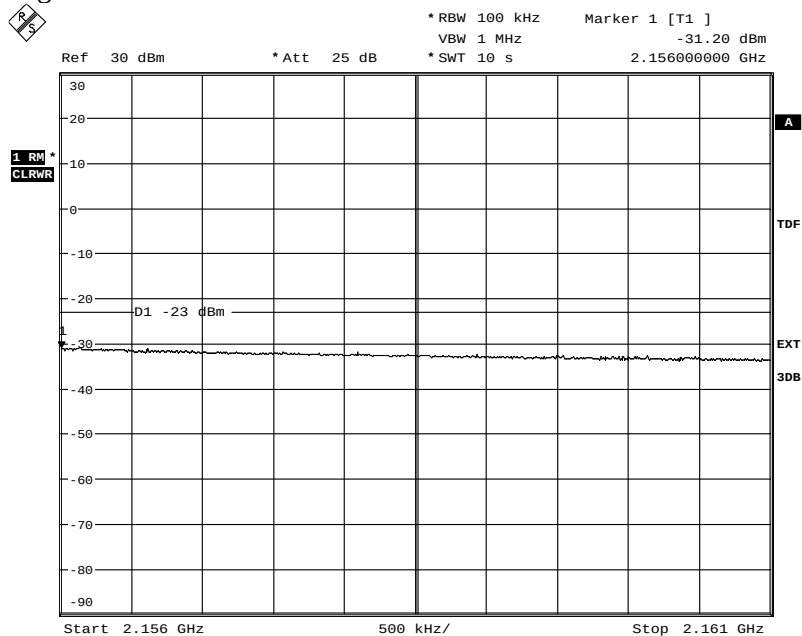

Date: 26.NOV.2012 14:25:48

Appendix 4


Diagram 14c:

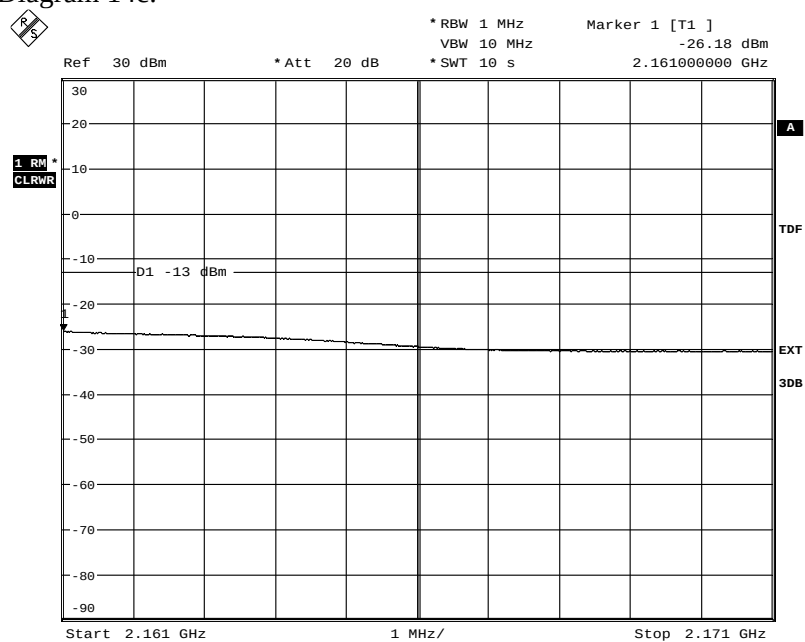

Date: 26.NOV.2012 14:24:04


Appendix 4

Diagram 15a:

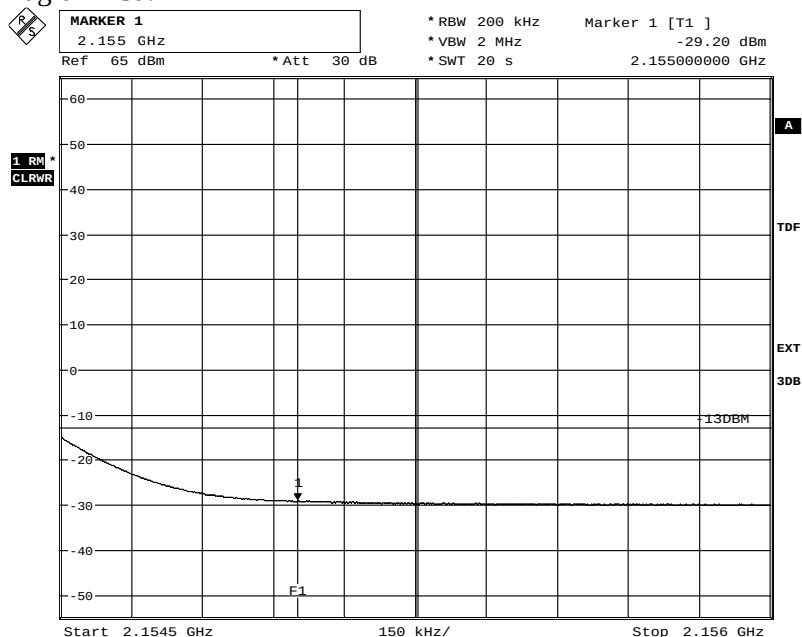

Date: 26.NOV.2012 14:17:53


Diagram 15b:

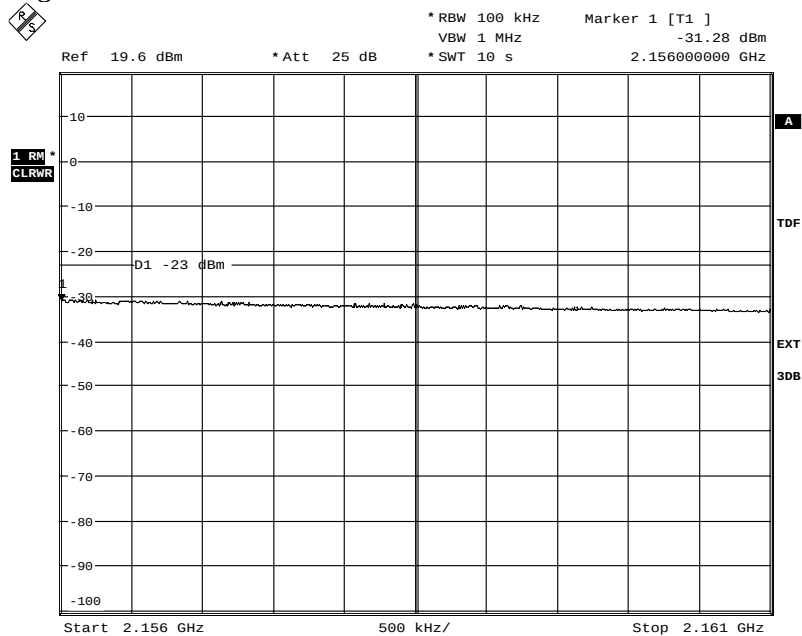

Date: 26.NOV.2012 14:19:26

Appendix 4


Diagram 15c:

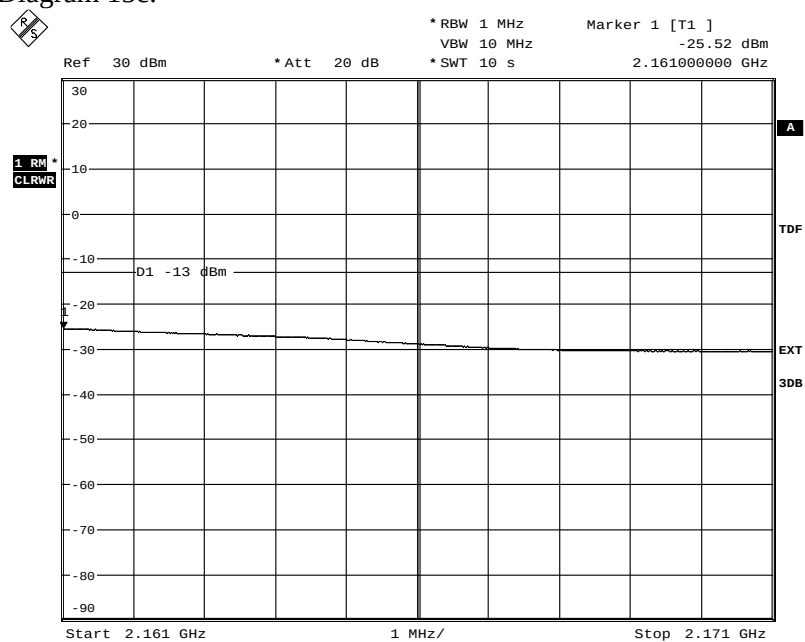

Date: 26.NOV.2012 14:22:37


Appendix 4

Diagram 16a:

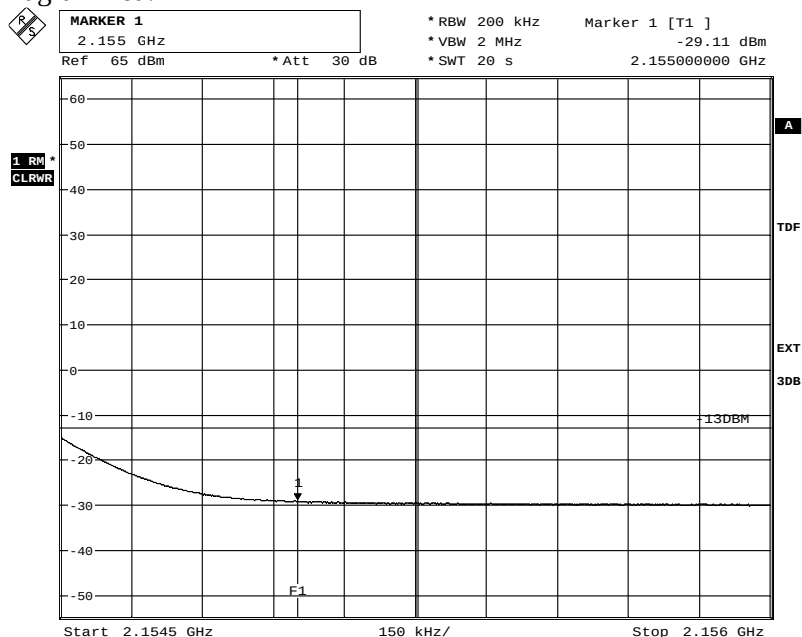

Date: 26.NOV.2012 14:14:14


Diagram 16b:

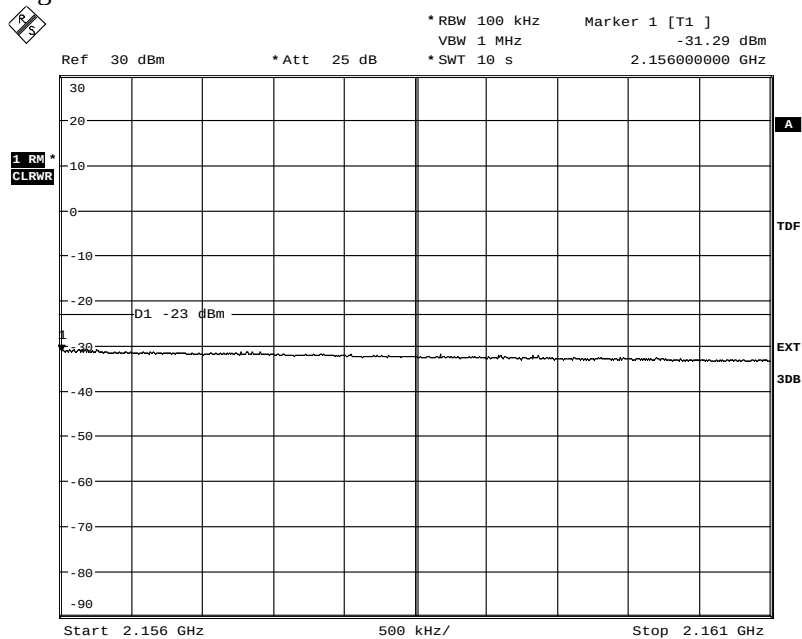

Date: 26.NOV.2012 14:13:11

Appendix 4


Diagram 16c:

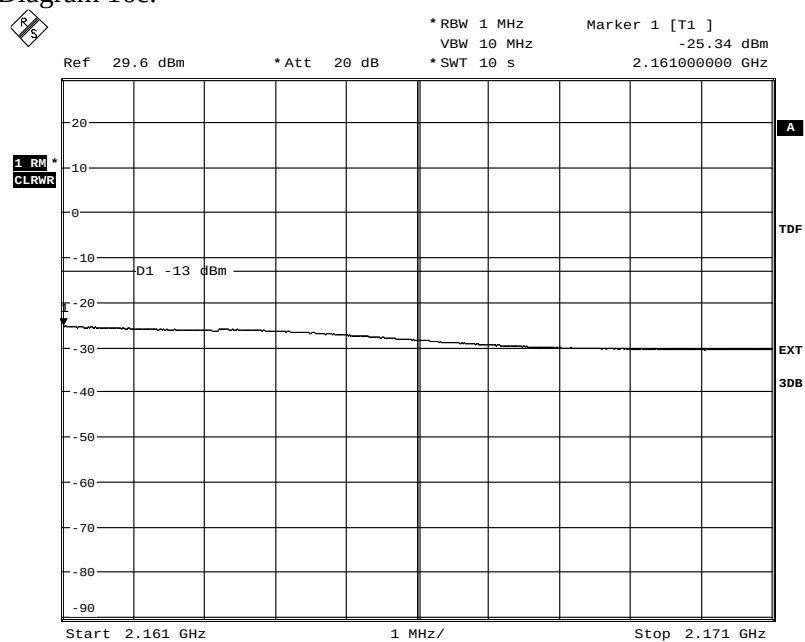

Date: 26.NOV.2012 14:07:20


Appendix 4

Diagram 17a:

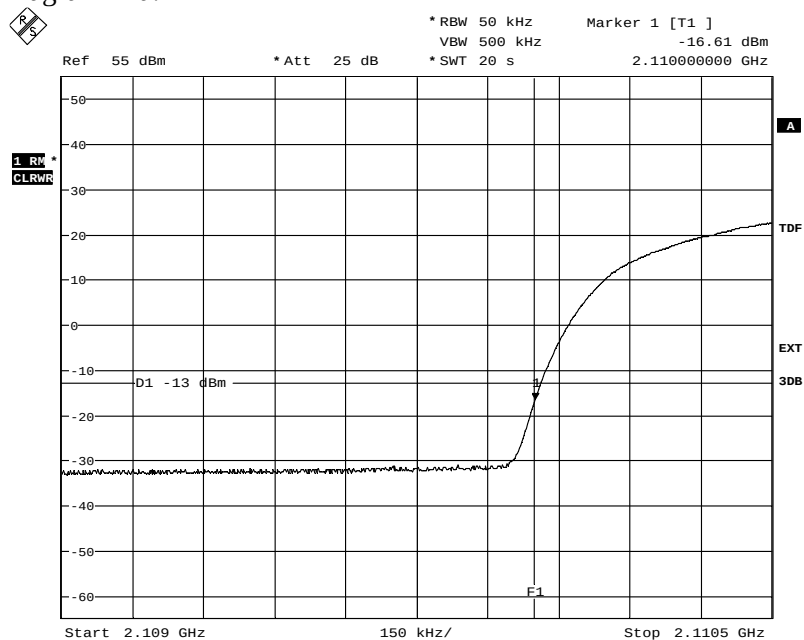

Date: 27.NOV.2012 15:43:20


Diagram 17b:

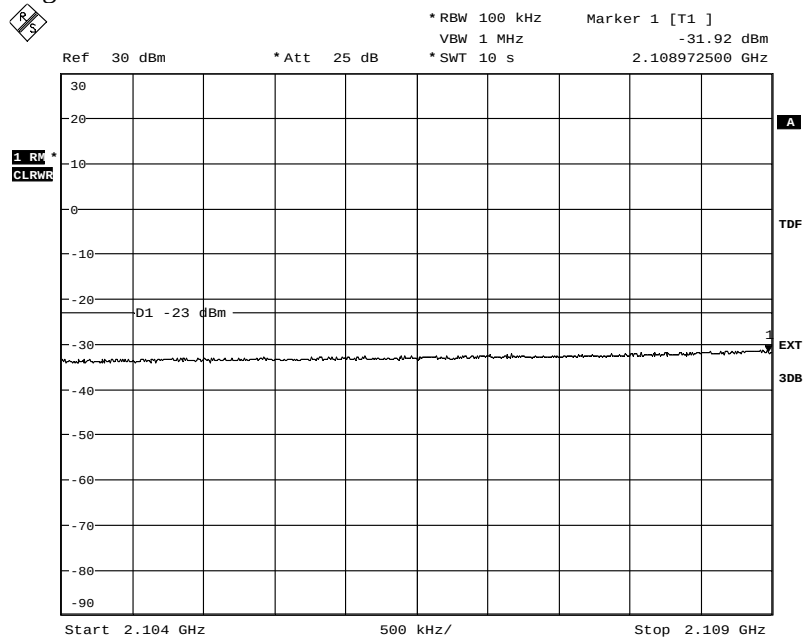

Date: 27.NOV.2012 15:40:28

Appendix 4


Diagram 17c:

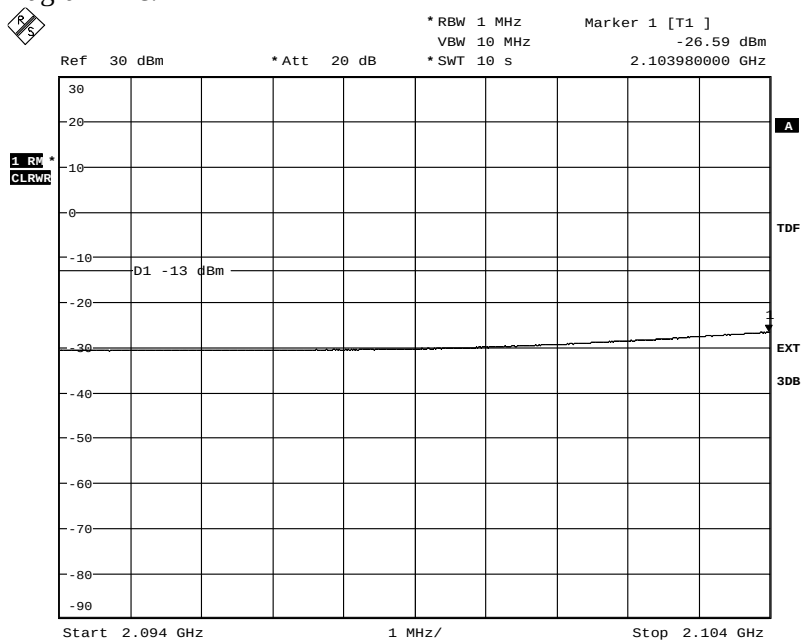

Date: 28.NOV.2012 11:00:58


Appendix 4

Diagram 18a:

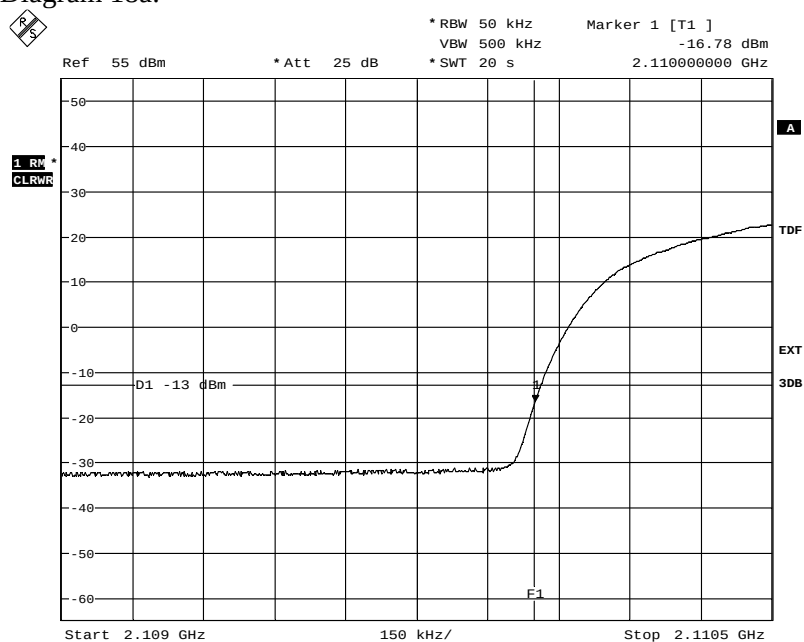

Date: 28.NOV.2012 12:00:33


Diagram 18b:

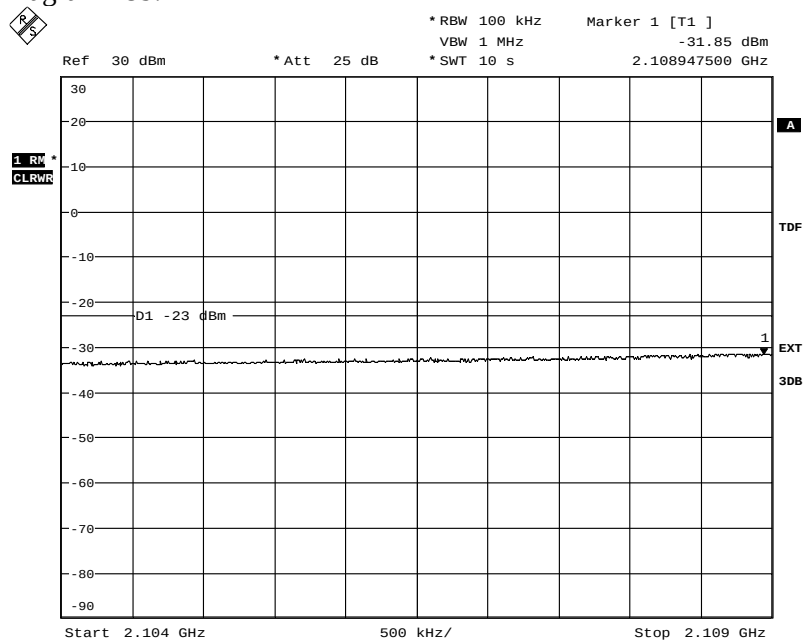

Date: 28.NOV.2012 12:03:55

Appendix 4


Diagram 18c:

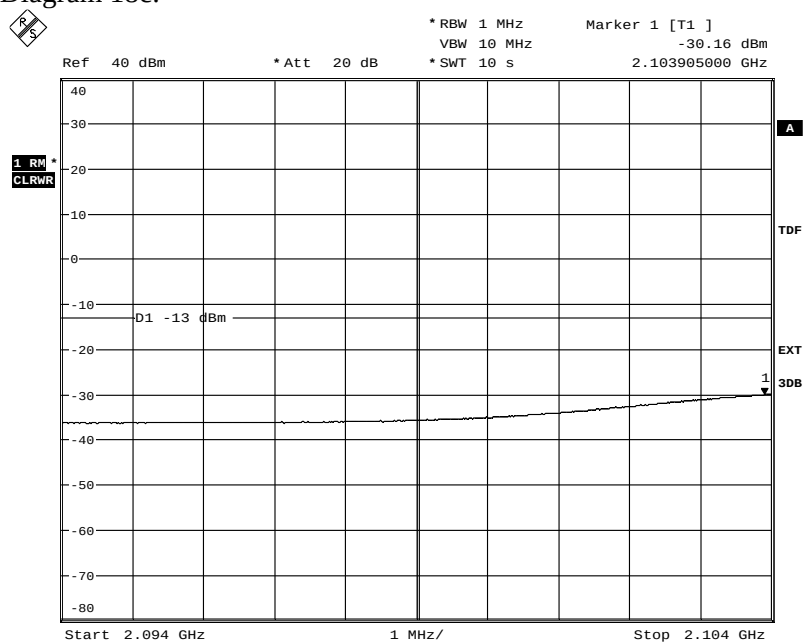

Date: 3.DEC.2012 15:39:59


Appendix 4

Diagram 19a:

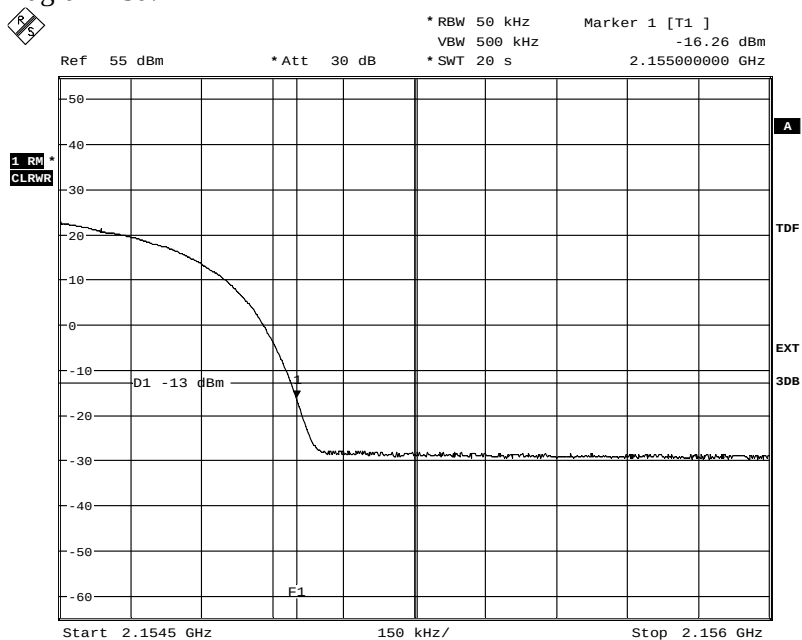

Date: 28.NOV.2012 10:34:59


Diagram 19b:

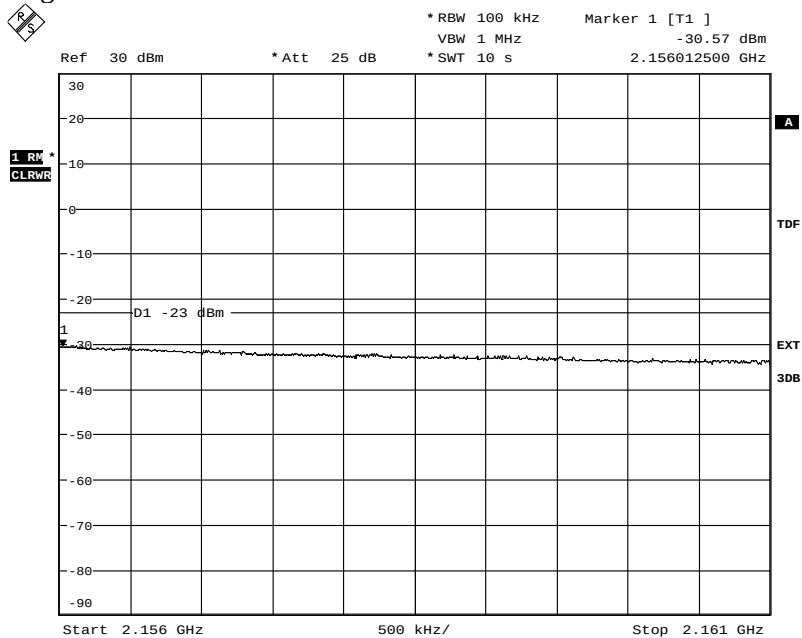

Date: 28.NOV.2012 10:36:14

Appendix 4


Diagram 19c:

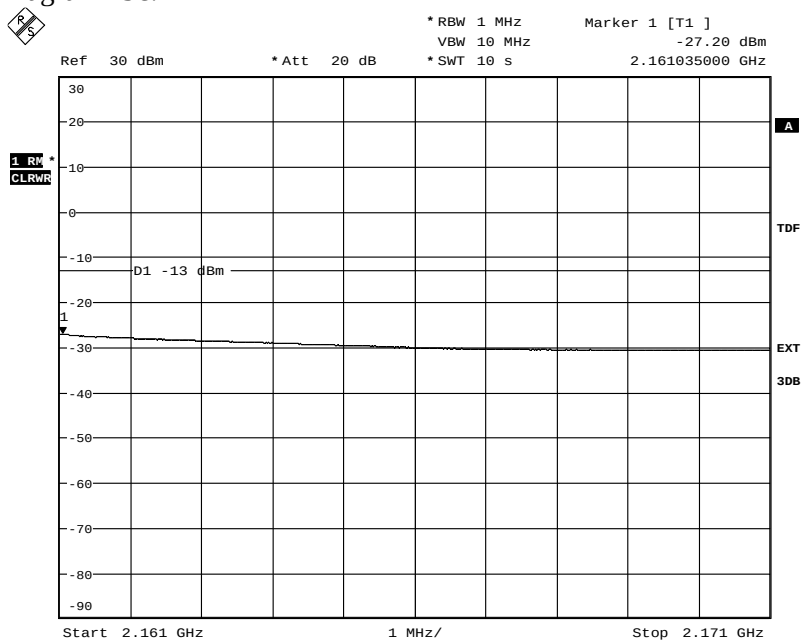

Date: 28.NOV.2012 10:37:56


Appendix 4

Diagram 20a:

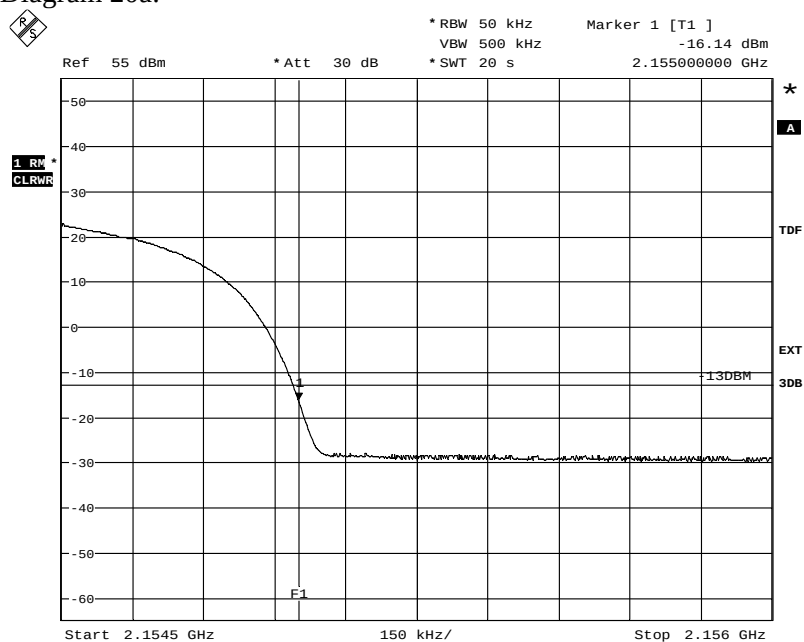

Date: 28.NOV.2012 09:18:58


Diagram 20b:

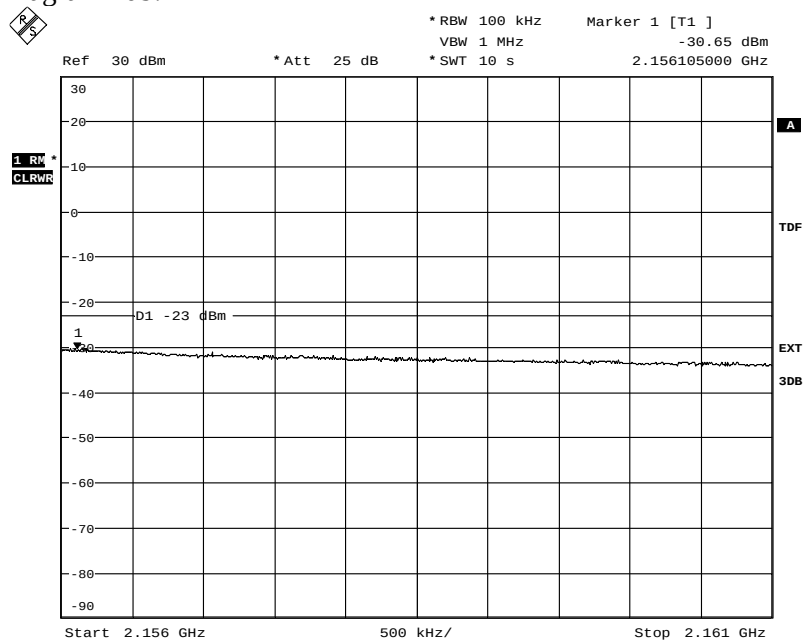

Date: 28.NOV.2012 09:16:56

Appendix 4


Diagram 20c:

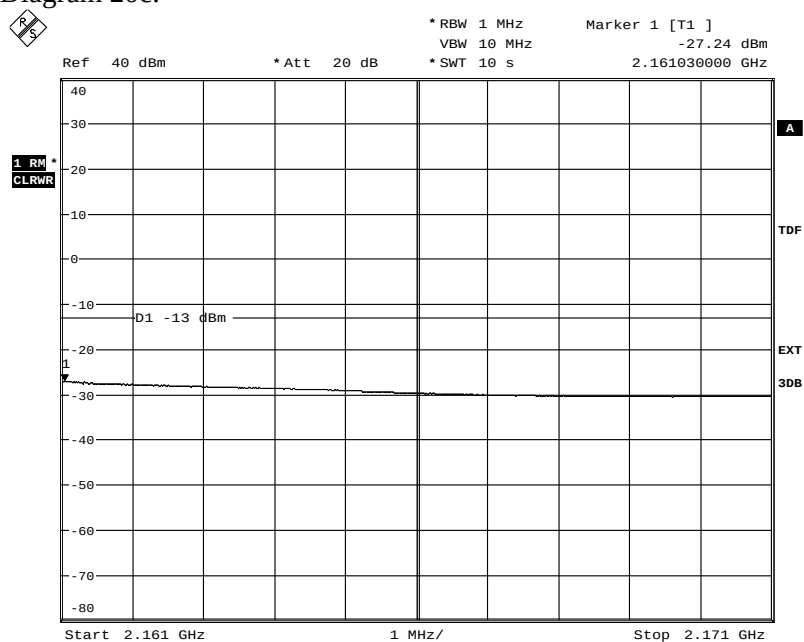

Date: 3.DEC.2012 14:38:24


Appendix 4

Diagram 21a:

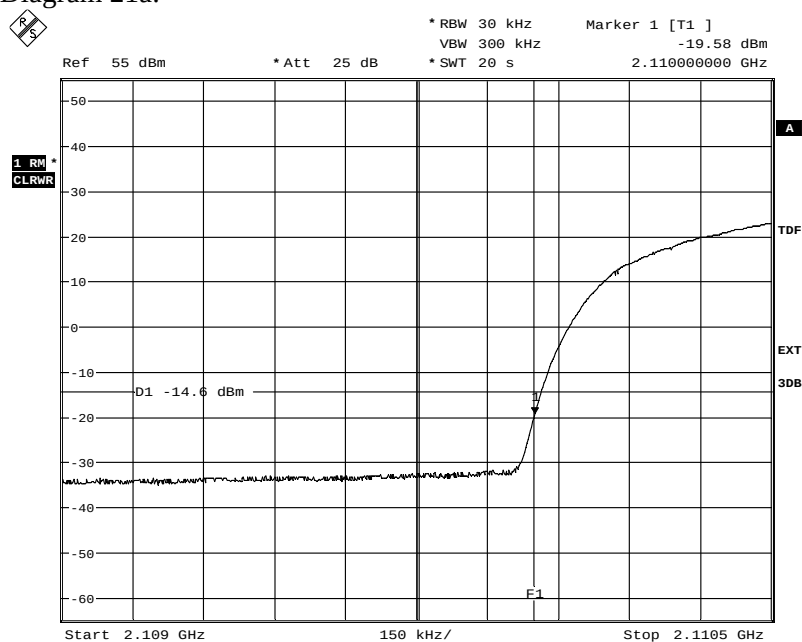

Date: 28.NOV.2012 14:09:15


Diagram 21b:

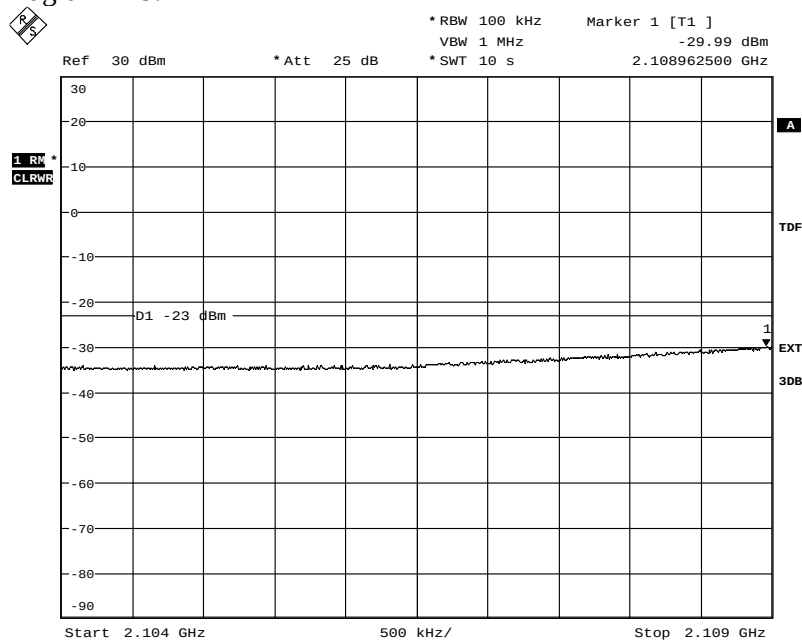

Date: 28.NOV.2012 14:22:13

Appendix 4


Diagram 21c:

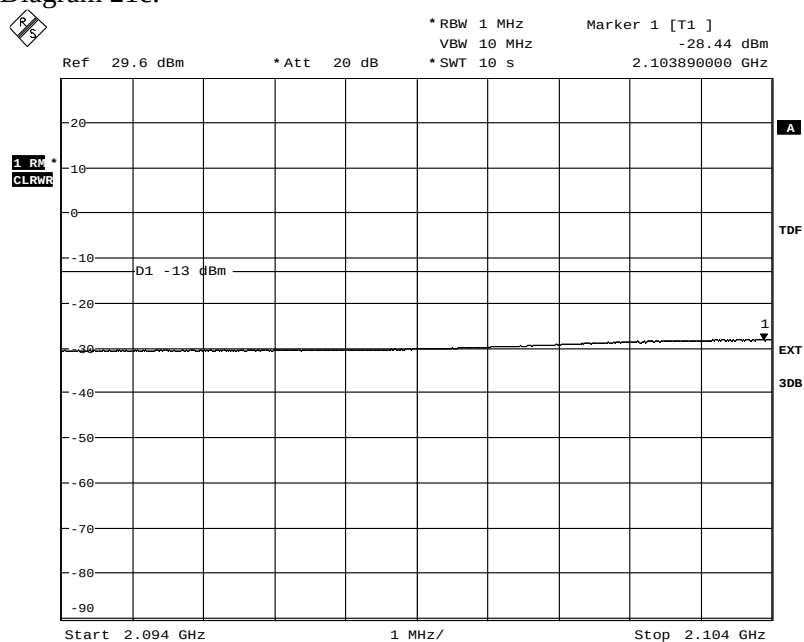

Date: 28.NOV.2012 14:24:29


Appendix 4

Diagram 22a:

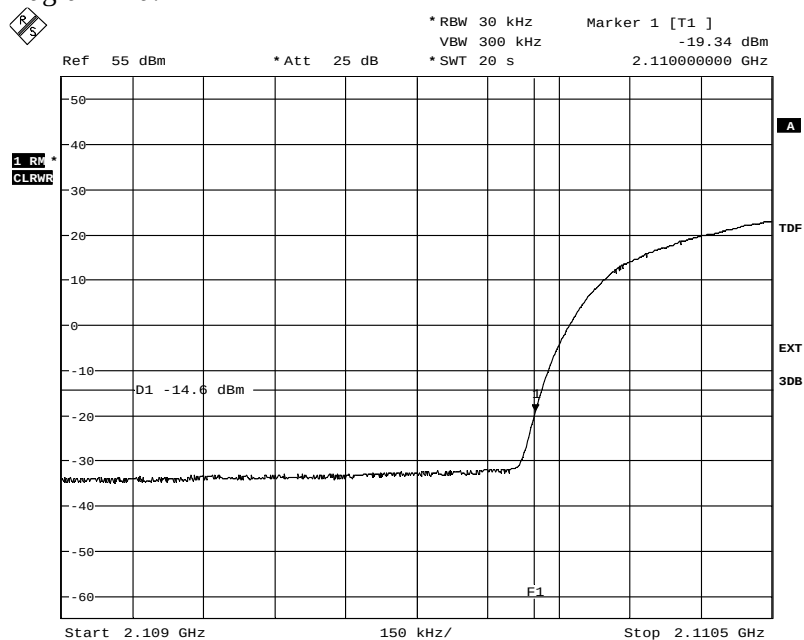

Date: 28.NOV.2012 16:13:24


Diagram 22b:

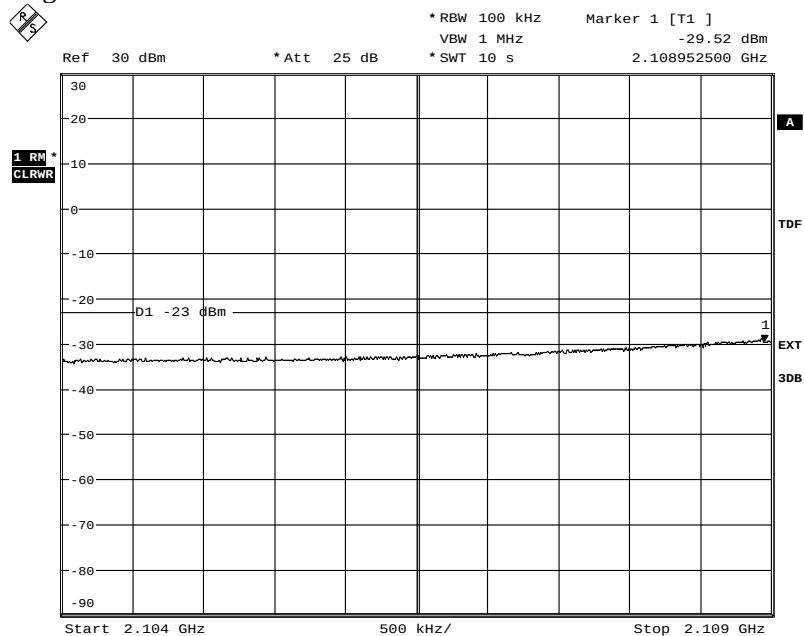

Date: 3.DEC.2012 14:46:31

Appendix 4


Diagram 22c:

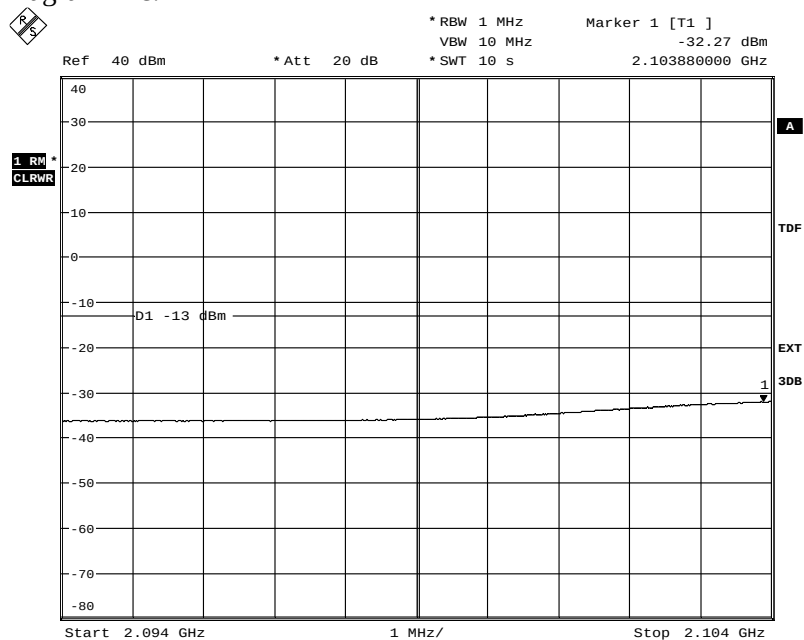

Date: 3.DEC.2012 14:47:30


Appendix 4

Diagram 23a:

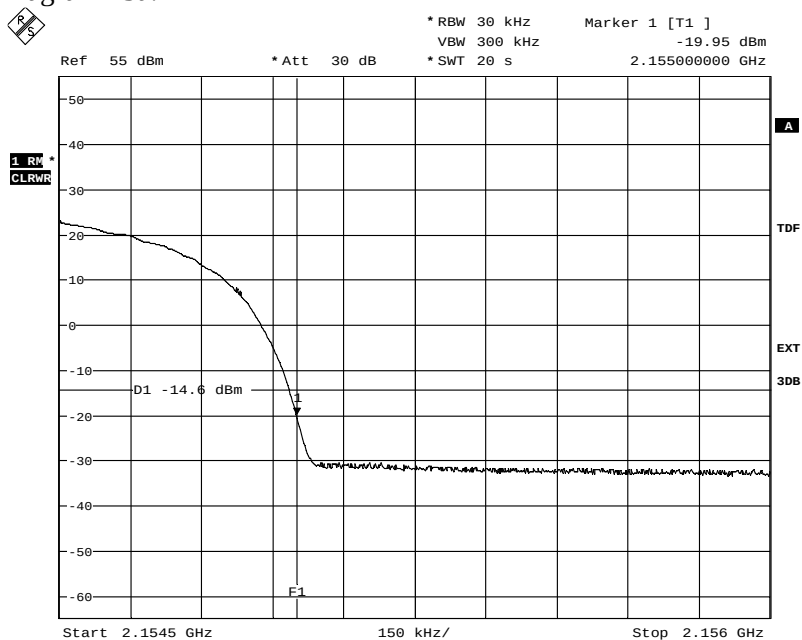

Date: 28.NOV.2012 15:46:42


Diagram 23b:

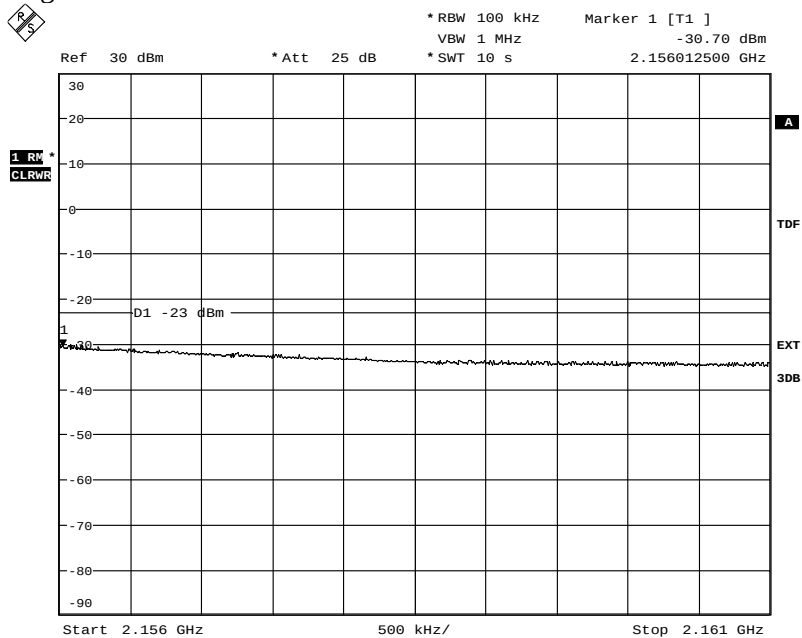

Date: 28.NOV.2012 15:48:19

Appendix 4


Diagram 23c:

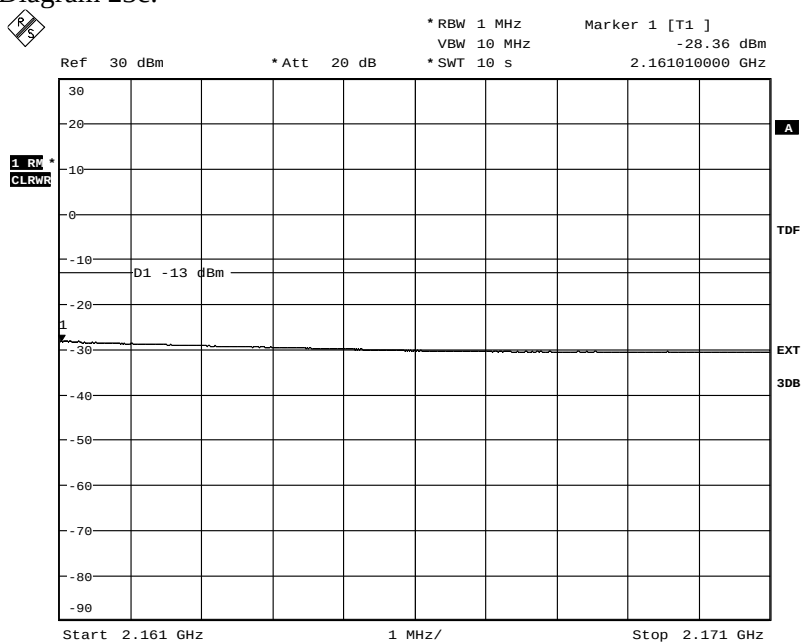

Date: 28.NOV.2012 15:49:26


Appendix 4

Diagram 24a:

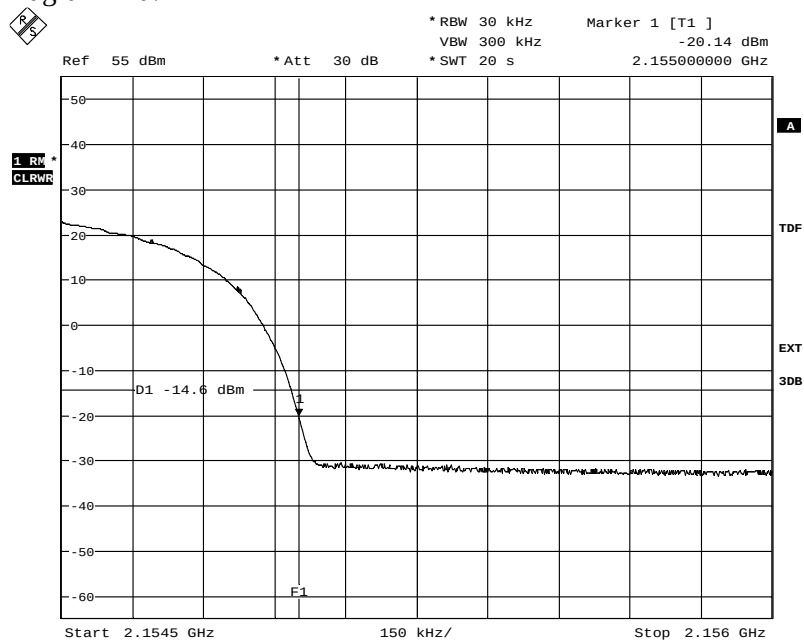

Date: 28.NOV.2012 16:01:01


Diagram 24b:

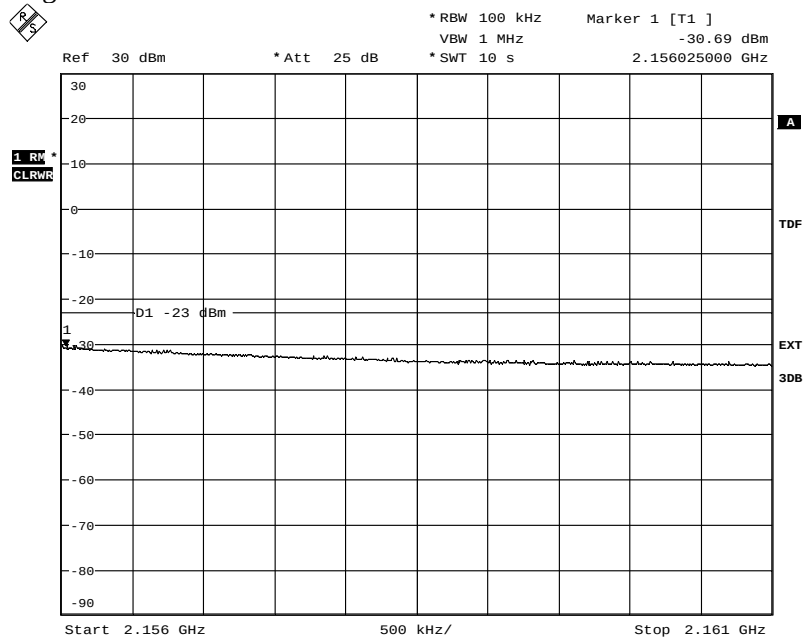

Date: 28.NOV.2012 15:58:26

Appendix 4

Diagram 24c:

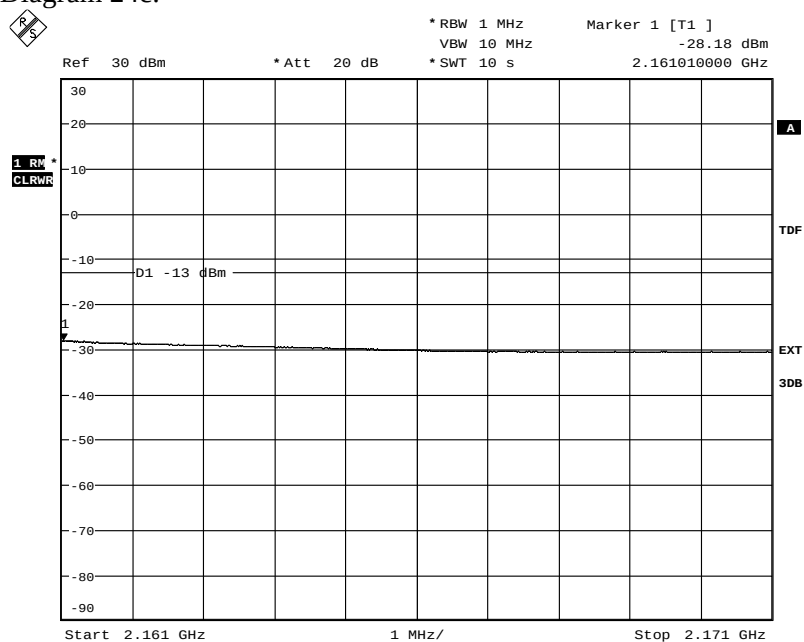

Date: 28.NOV.2012 15:57:38

Appendix 5

Conducted spurious emission measurements according to CFR 47 §27.53(h)/ IC RSS-139 6.5

Date	Temperature	Humidity
2012-11-26	23 °C ± 3 °C	32 % ± 5 %
2012-11-27	23 °C ± 3 °C	28 % ± 5 %
2012-11-28	23 °C ± 3 °C	31 % ± 5 %
2012-11-29	23 °C ± 3 °C	19 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §27.53(h). The output was connected to a spectrum analyzer with a RBW setting of 1 MHz and RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method 2 “measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v01r02

Measurement equipment	SP number
R&S FSQ	504 143
RF attenuator	504 159
RF attenuator	901 384
RF attenuator	900 233
HP filter	901 502
Directional coupler	901 496
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB .

Appendix 5

Results

LTE:

Diagram	BW configuration / [MHz]	Tested frequency	Tested Port
1 a+b+c+d	1.4 MHz	M	RUS 1, primary linked
2 a+b+c+d	1.4 MHz	M	RUS 1, secondary linked
3 a+b+c+d	20 MHz	M	RUS 1, primary linked
4 a+b+c+d	20 MHz	M	RUS 1, secondary linked

WCDMA:


Diagram	BW configuration / [MHz]	Tested frequency	Tested Port
5 a+b+c+d	5 MHz	M+(M+5)	RUS 1, primary linked
6 a+b+c+d	5 MHz	M+(M+5)	RUS 1, secondary linked
7 a+b+c+d	5 MHz	M	RUS 1, primary linked
8 a+b+c+d	5 MHz	M	RUS 1, secondary linked

MSR, LTE+WCDMA:

Diagram	Tested configuration	Tested Port
9	1	RF A
10	2	RF A
11	3	RF A
12 a+b+c+d	4	RF A
13 a+b+c+d	5	RF A
14 a+b+c+d	6	RF A
15	7	RF A
16	8	RF A
17	9	RF A


Appendix 5

Diagram 1a:

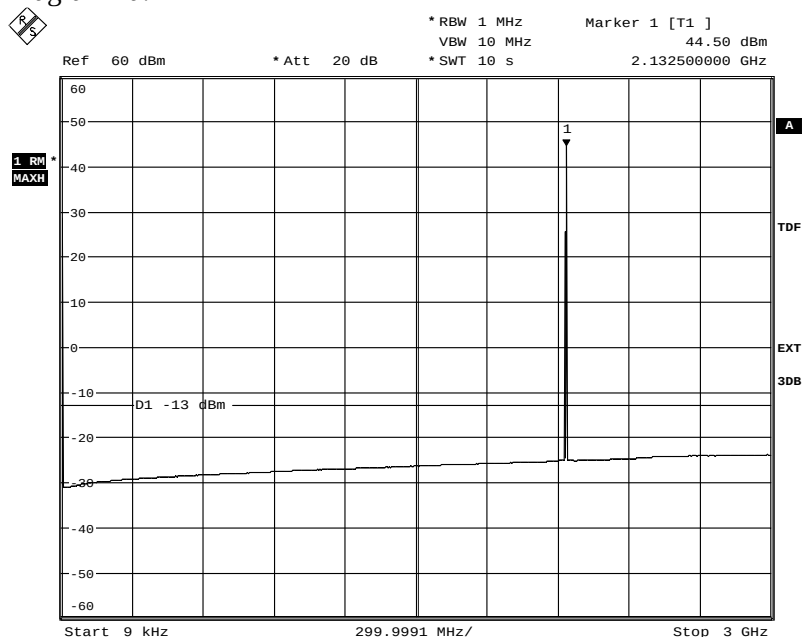

Date: 26.NOV.2012 09:48:14


Diagram 1b

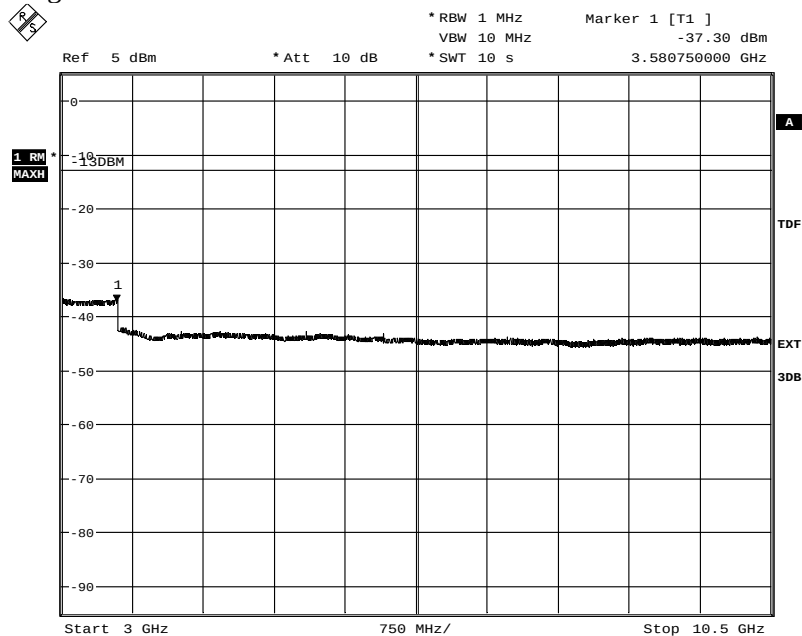

Date: 26.NOV.2012 09:51:02


Appendix 5

Diagram 1c:

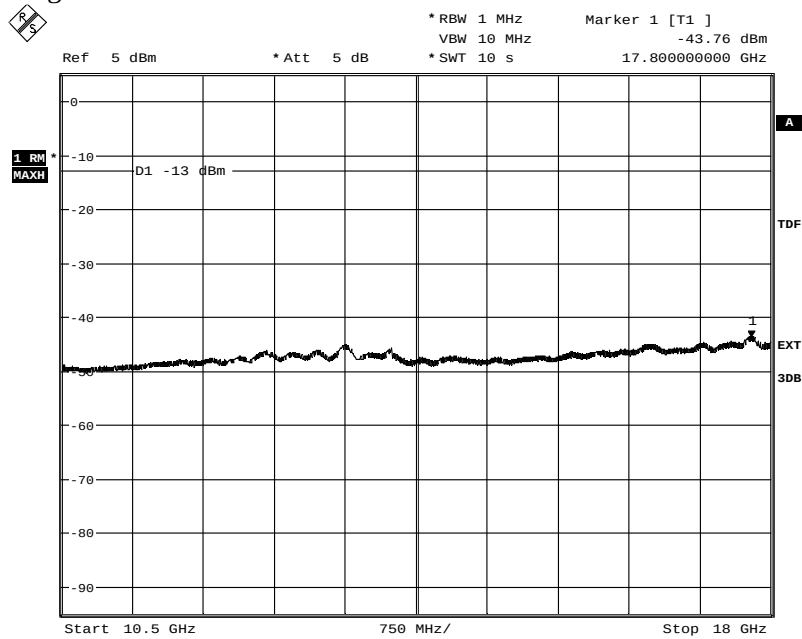

Date: 26.NOV.2012 09:51:59


Diagram 1d

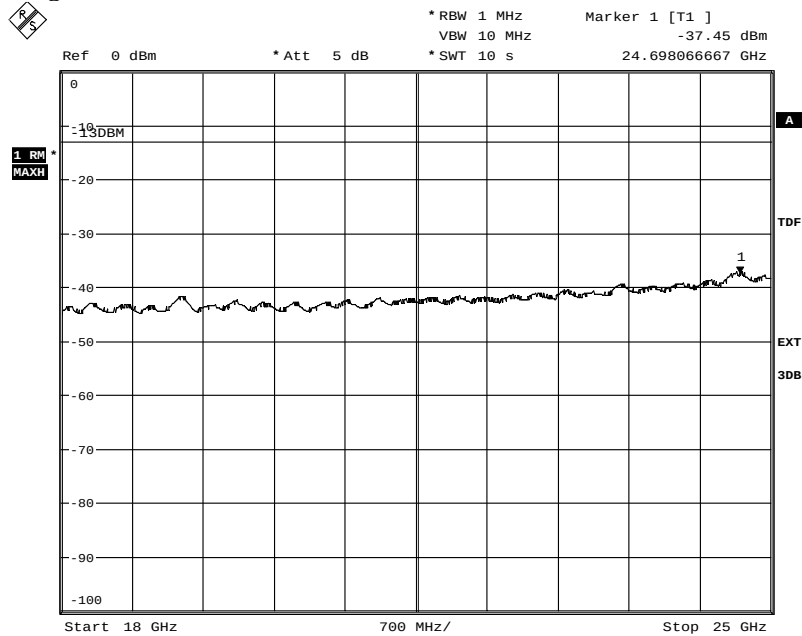

Date: 26.NOV.2012 09:53:28


Appendix 5

Diagram 2a:

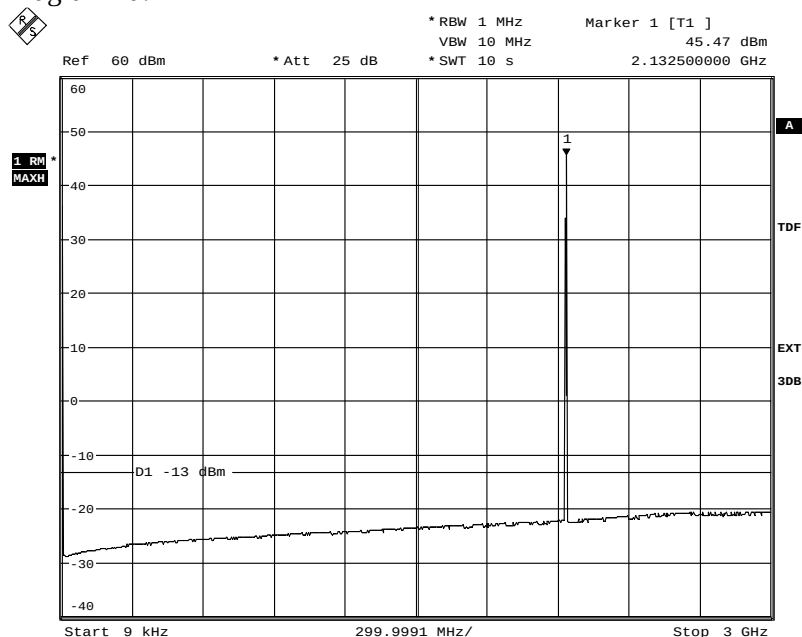

Date: 26.NOV.2012 12:00:39


Diagram 2b:

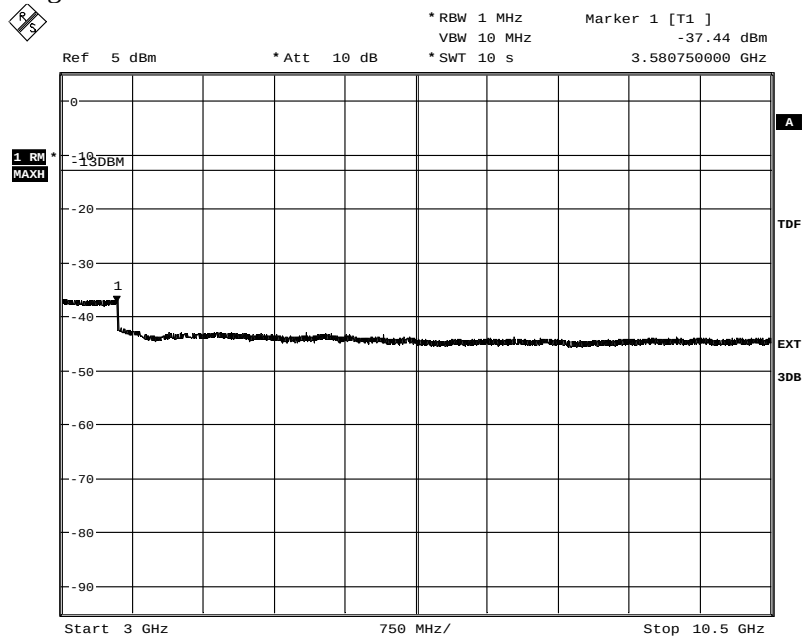

Date: 26.NOV.2012 11:59:00


Appendix 5

Diagram 2c:

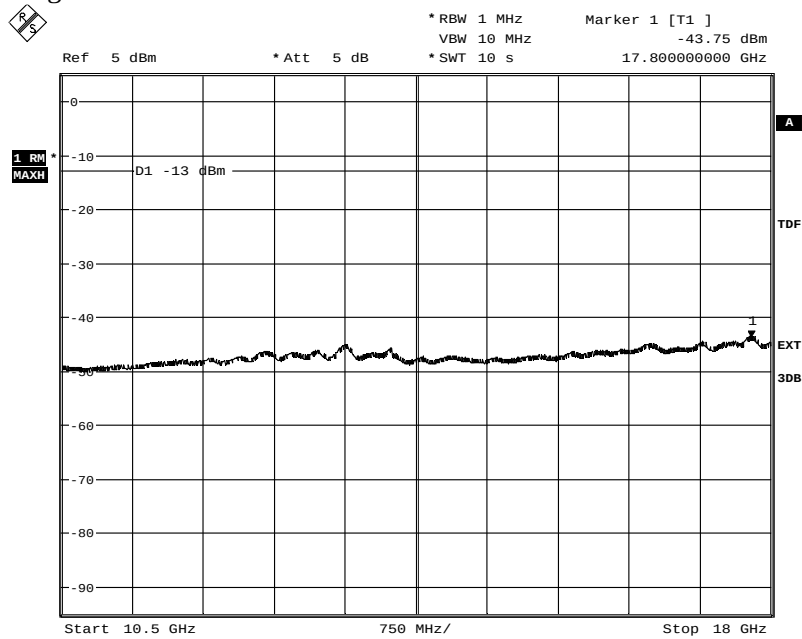

Date: 26.NOV.2012 11:57:55


Diagram 2d:

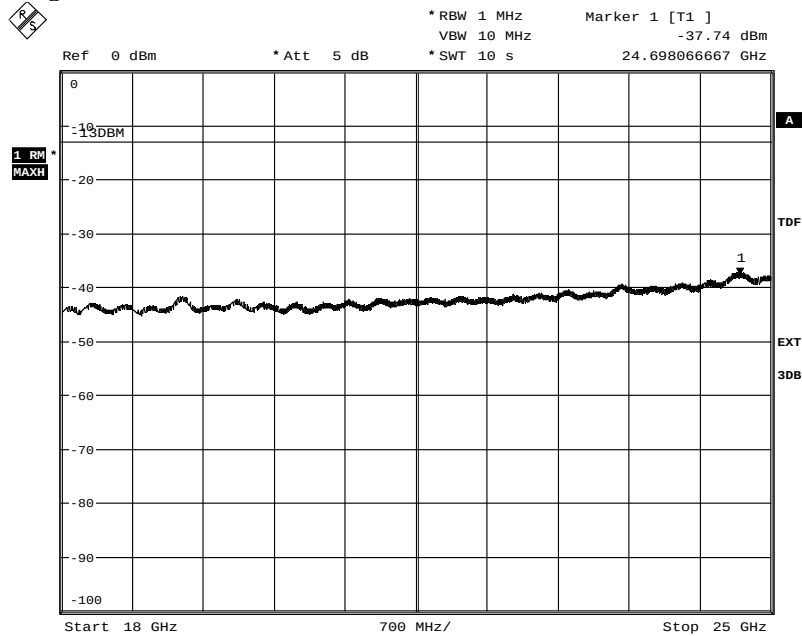

Date: 26.NOV.2012 11:56:58


Appendix 5

Diagram 3a:

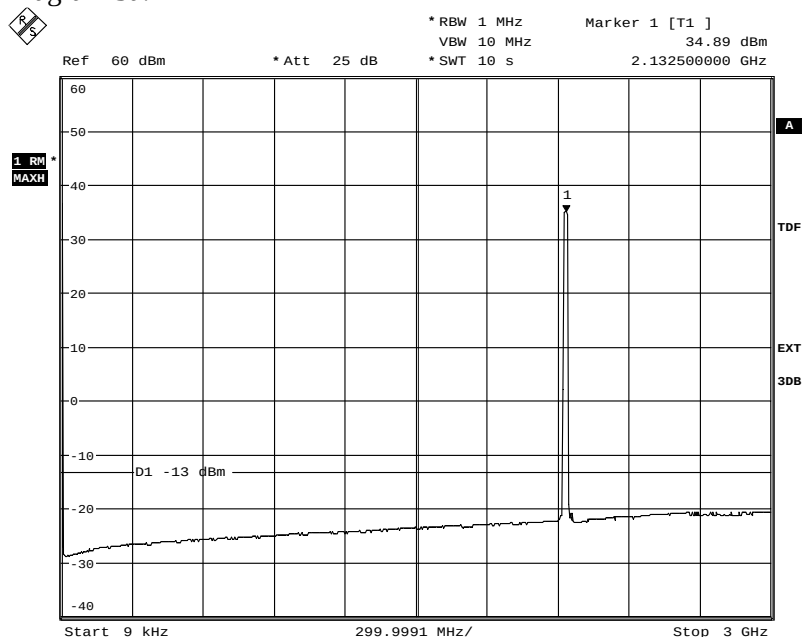

Date: 26.NOV.2012 10:07:48


Diagram 3b

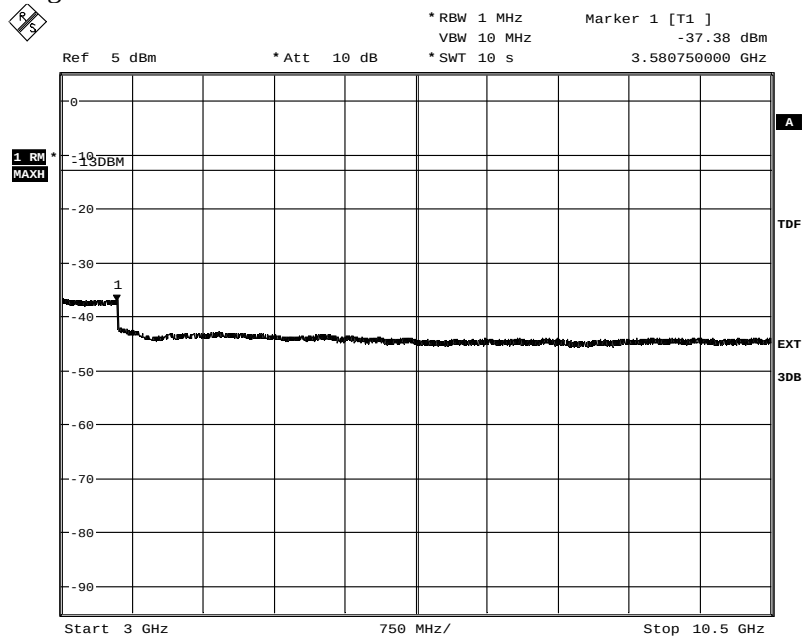

Date: 26.NOV.2012 10:05:43


Appendix 5

Diagram 3c:

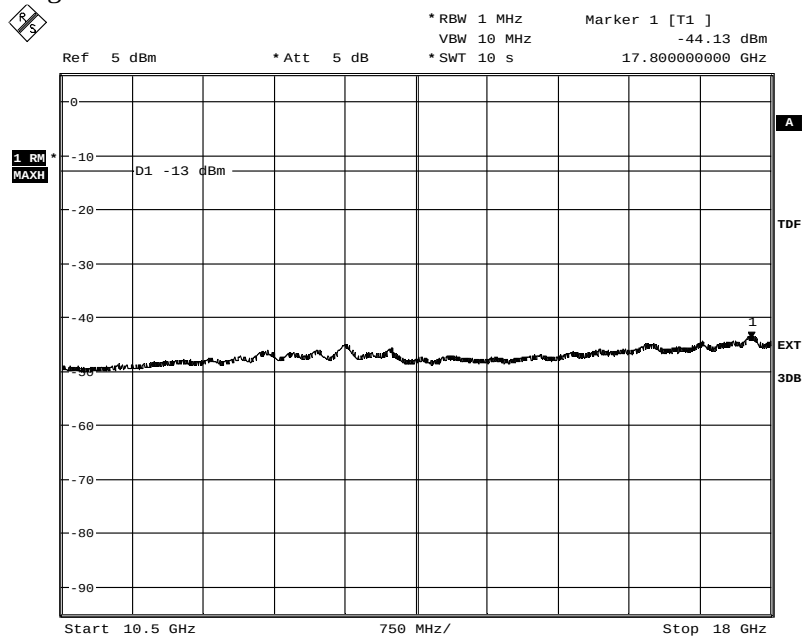

Date: 26.NOV.2012 10:03:24


Diagram 3d:

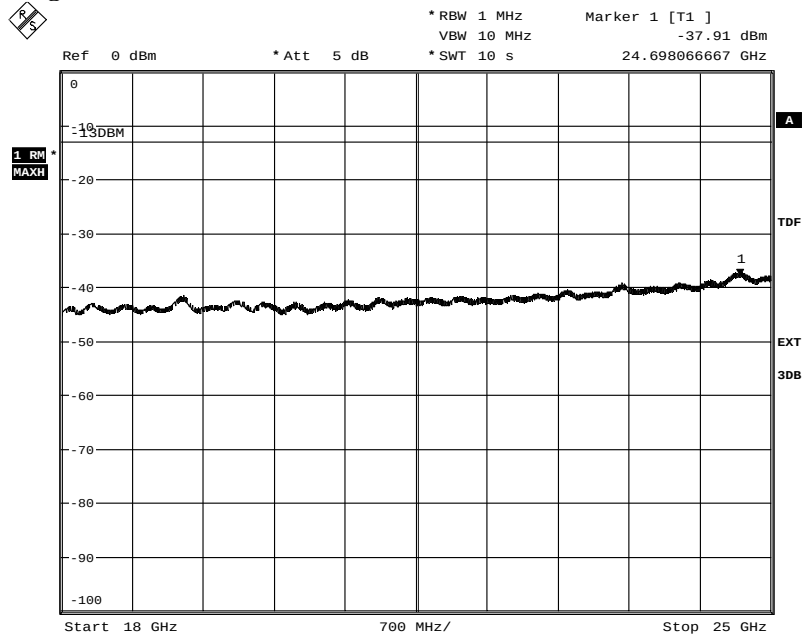

Date: 26.NOV.2012 10:02:12


Appendix 5

Diagram 4a:

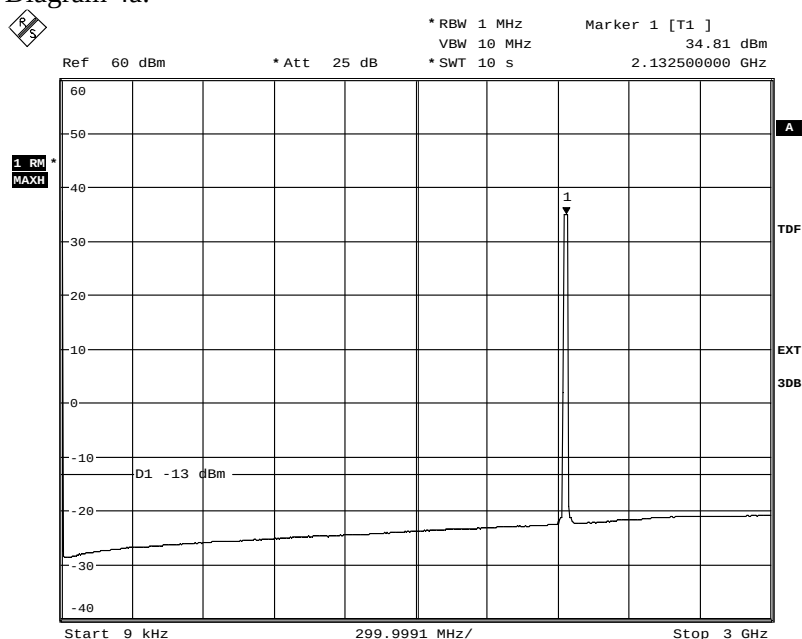

Date: 26.NOV.2012 11:51:29


Diagram 4b

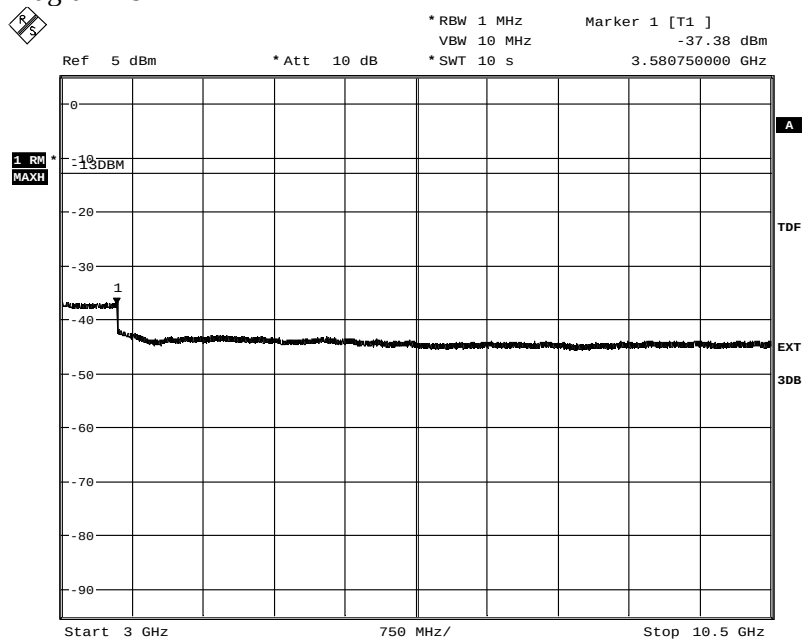

Date: 26.NOV.2012 11:53:04


Appendix 5

Diagram 4c:

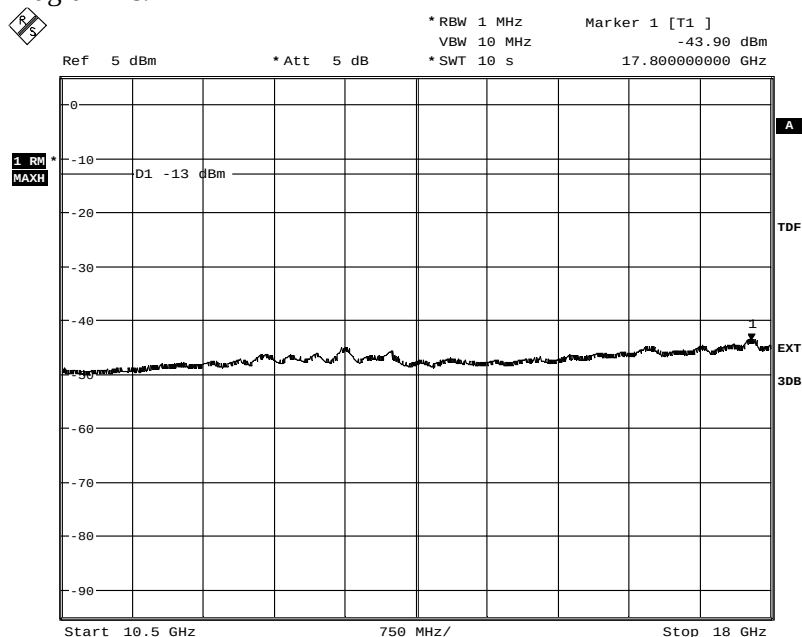

Date: 26.NOV.2012 11:54:12


Diagram 4d:

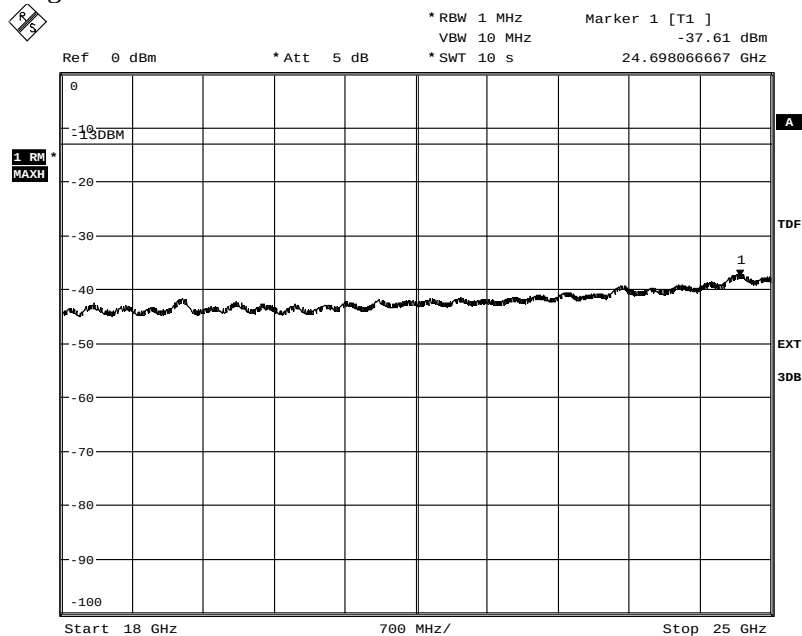

Date: 26.NOV.2012 11:55:16


Appendix 5

Diagram 5a:

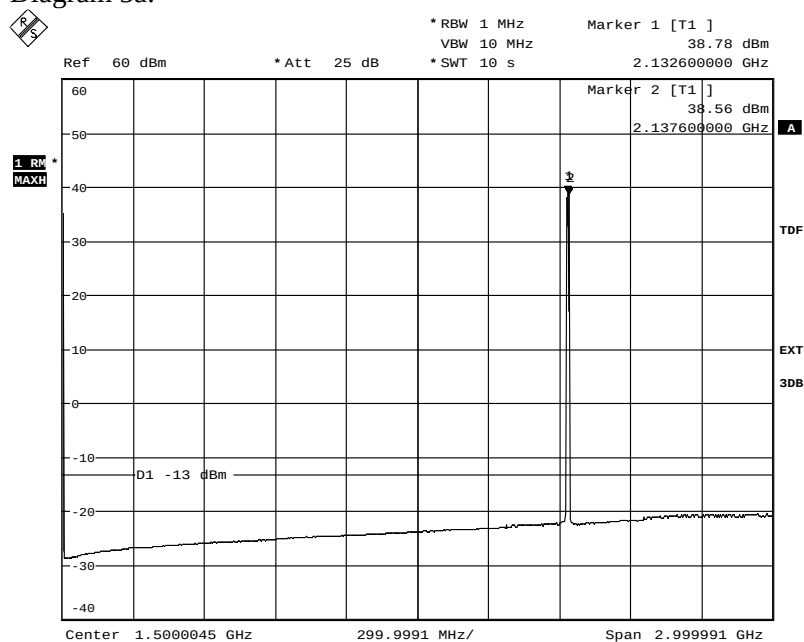

Date: 27.NOV.2012 14:54:41


Diagram 5b:

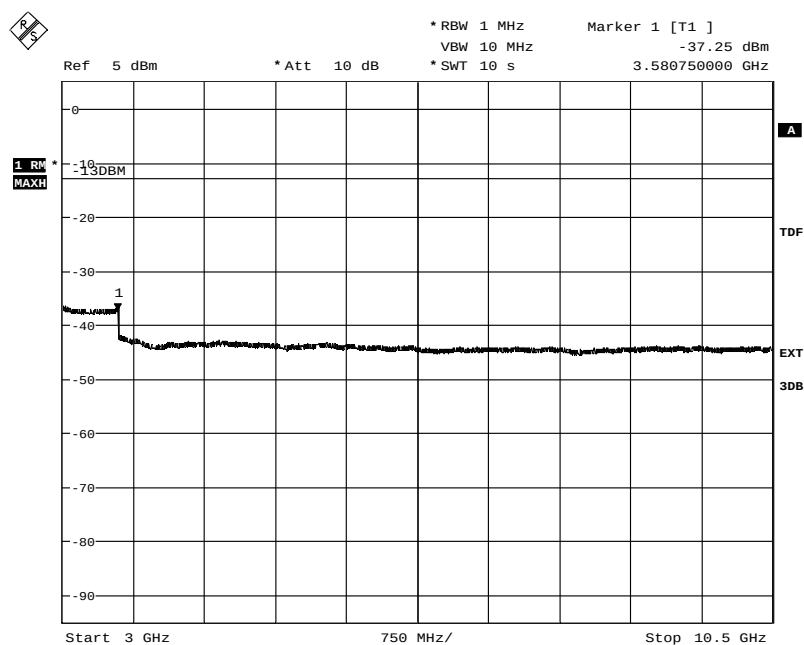

Date: 27.NOV.2012 14:56:46


Appendix 5

Diagram 5c:

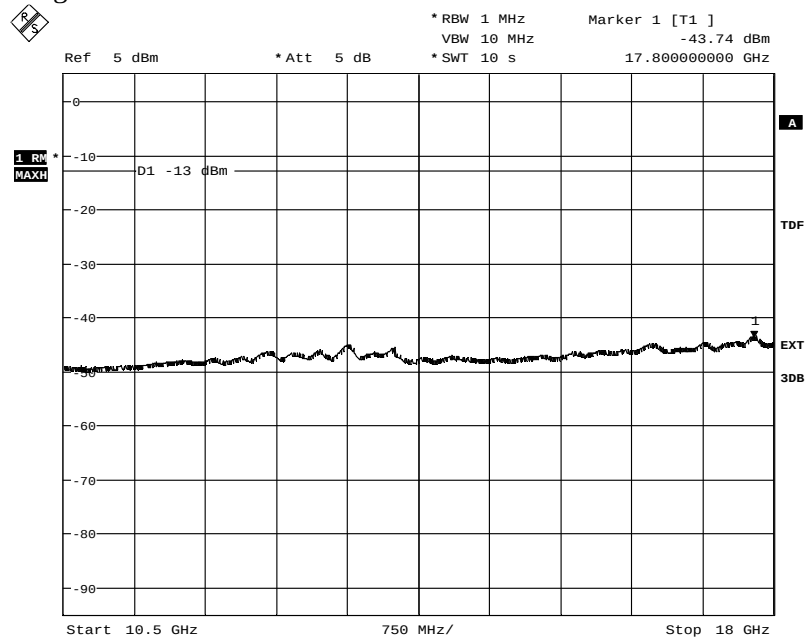

Date: 27.NOV.2012 14:59:37


Diagram 5d:

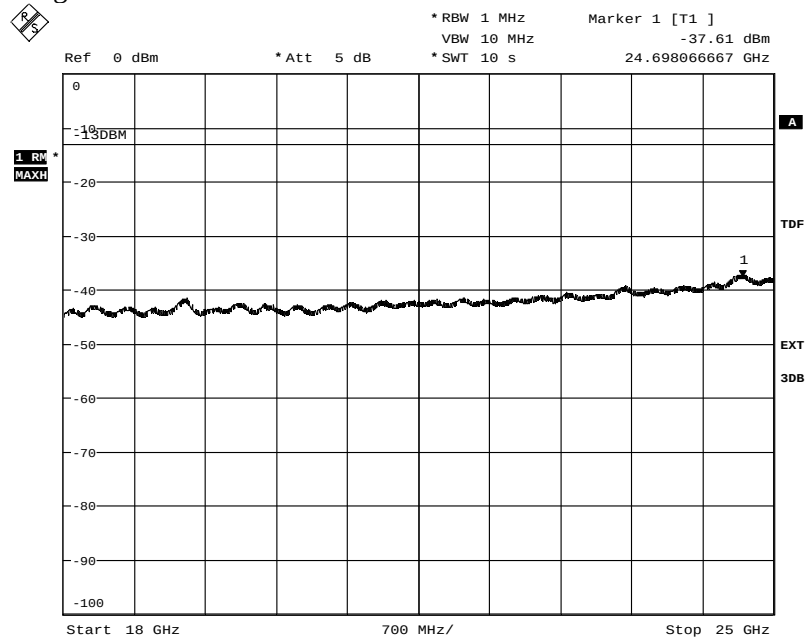

Date: 27.NOV.2012 15:01:01


Appendix 5

Diagram 6a:

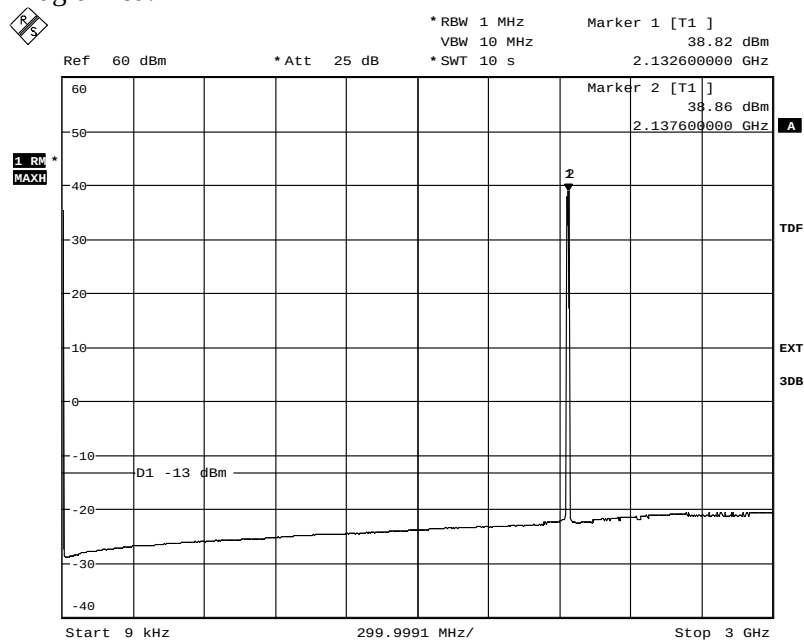

Date: 28.NOV.2012 08:02:29


Diagram 6b:

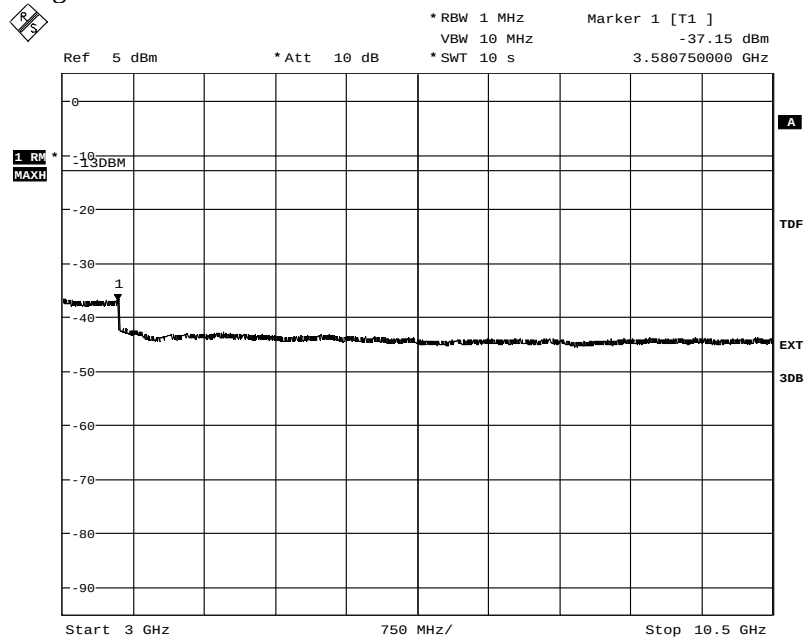

Date: 28.NOV.2012 08:04:30


Appendix 5

Diagram 6c:

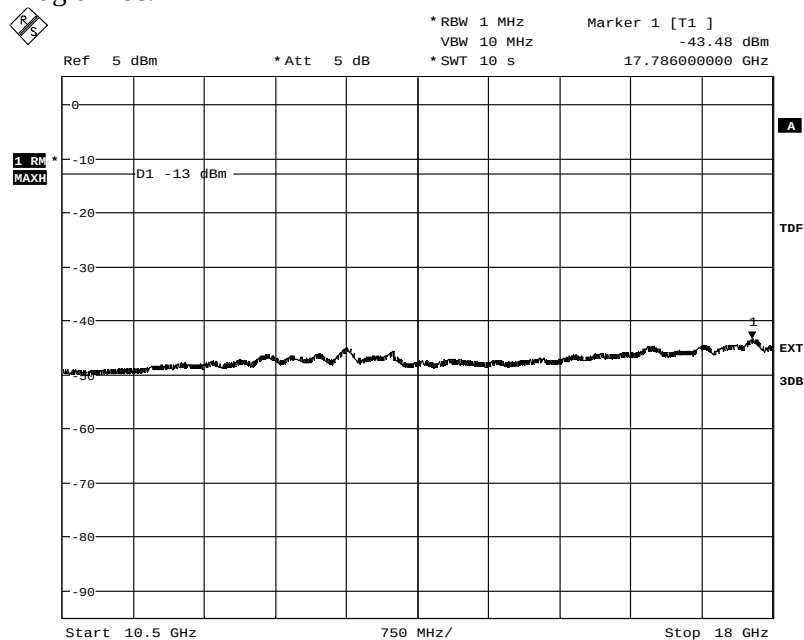

Date: 28.NOV.2012 08:05:56


Diagram 6d:

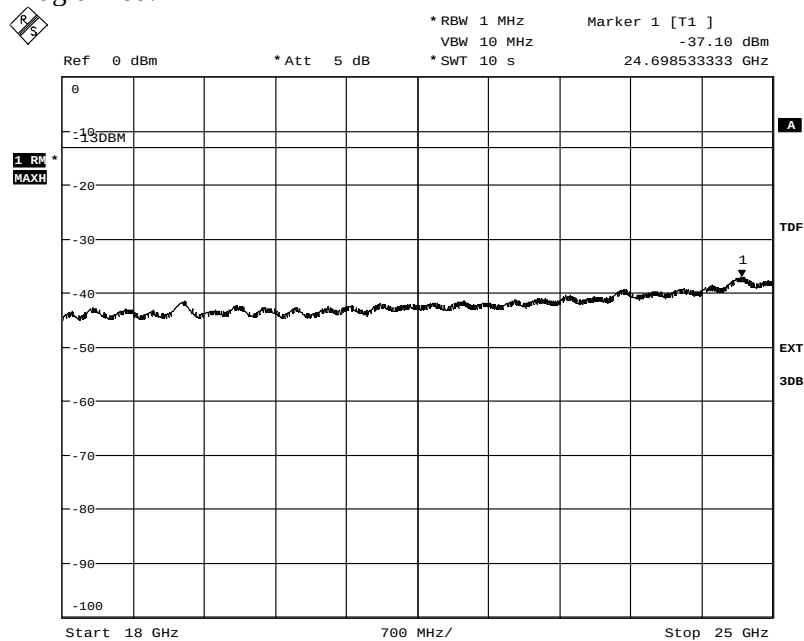

Date: 28.NOV.2012 08:07:00


Appendix 5

Diagram 7a:

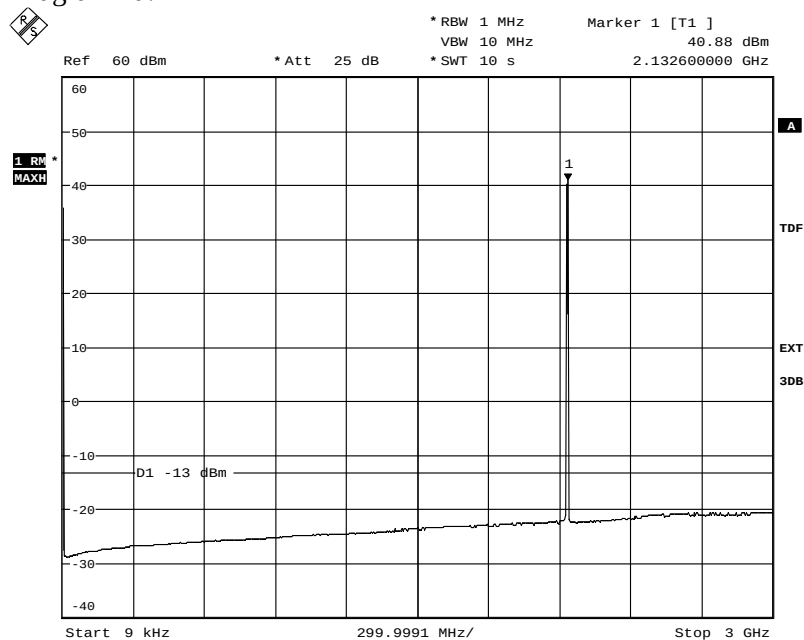

Date: 28.NOV.2012 13:53:50


Diagram 7b:

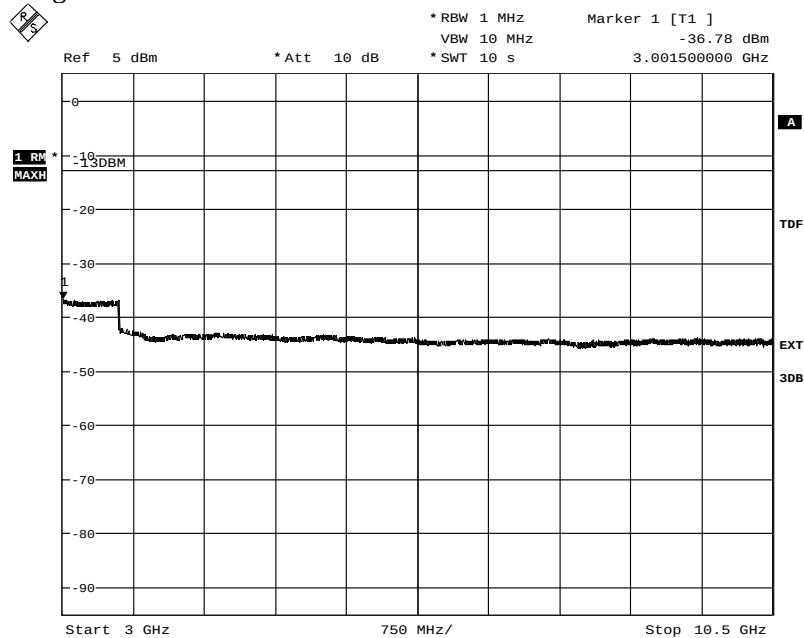

Date: 28.NOV.2012 13:56:00


Appendix 5

Diagram 7c:

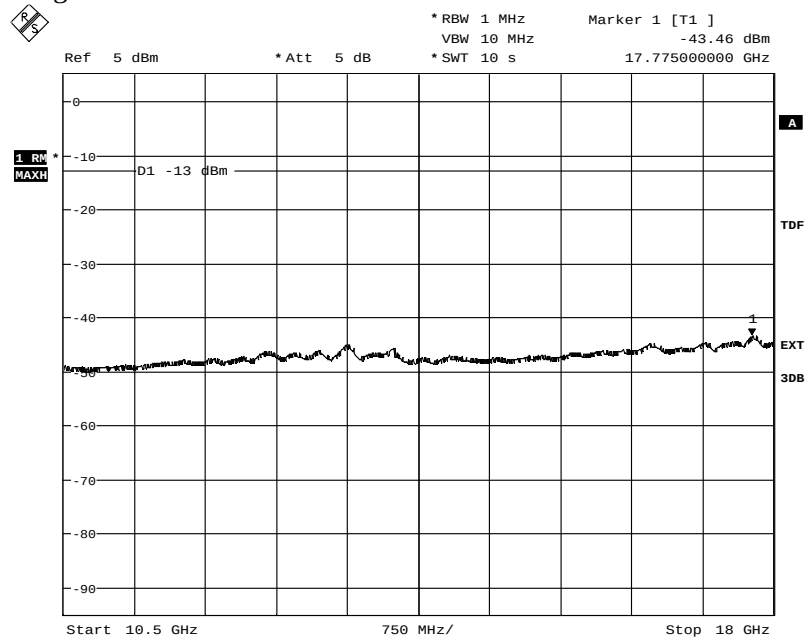

Date: 28.NOV.2012 13:57:20


Diagram 7d:

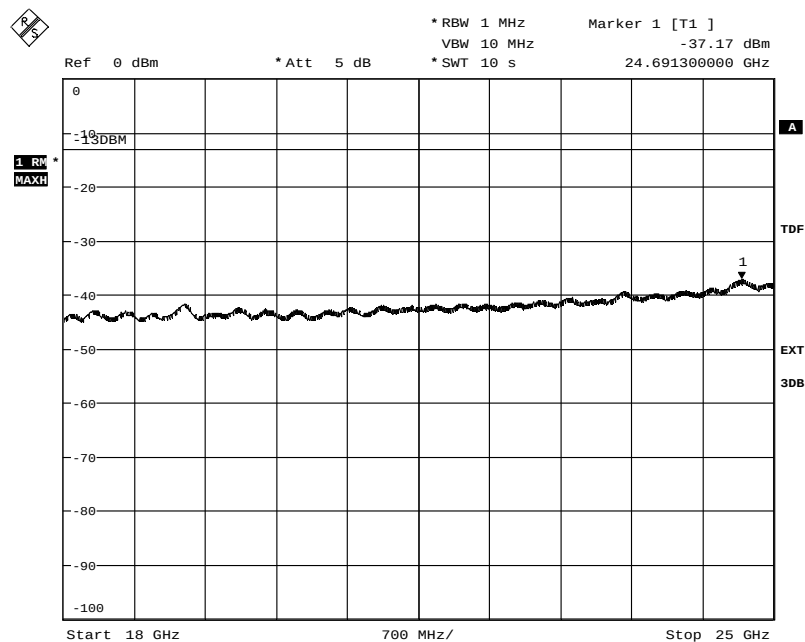

Date: 28.NOV.2012 13:58:29


Appendix 5

Diagram 8a:

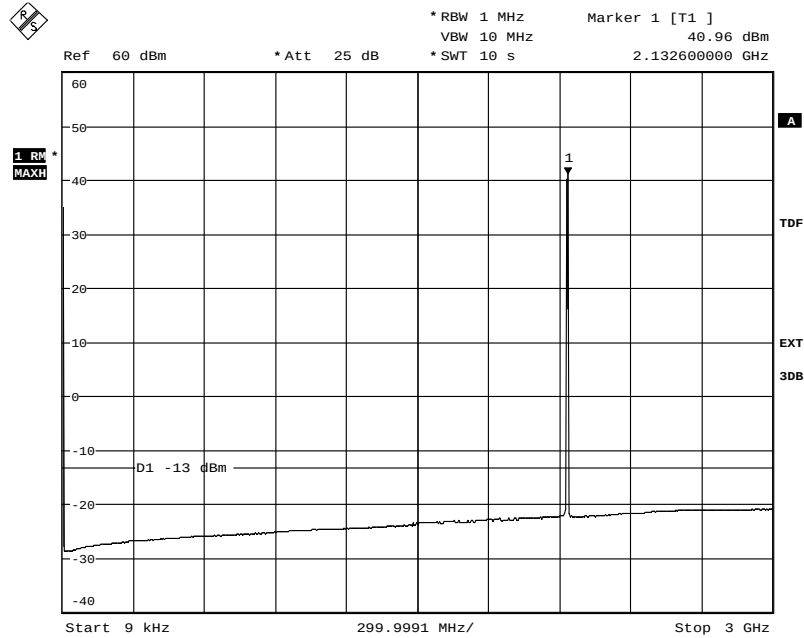

Date: 29.NOV.2012 09:14:07


Diagram 8b:

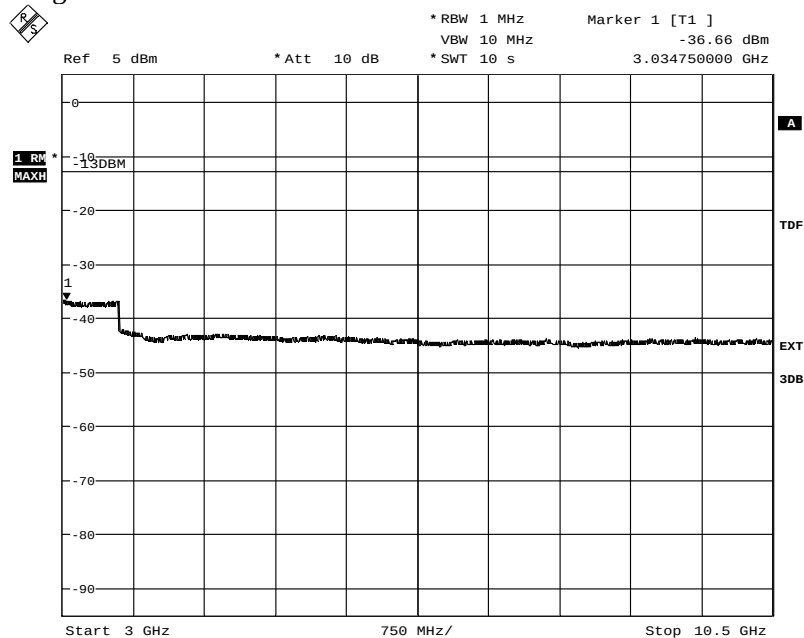

Date: 29.NOV.2012 09:20:23


Appendix 5

Diagram 8c:

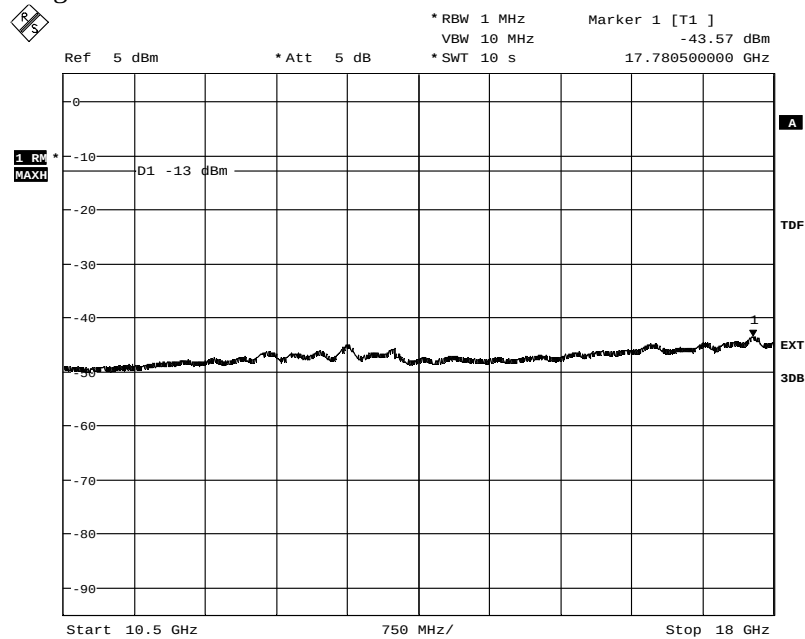

Date: 29.NOV.2012 09:17:36


Diagram 8d:

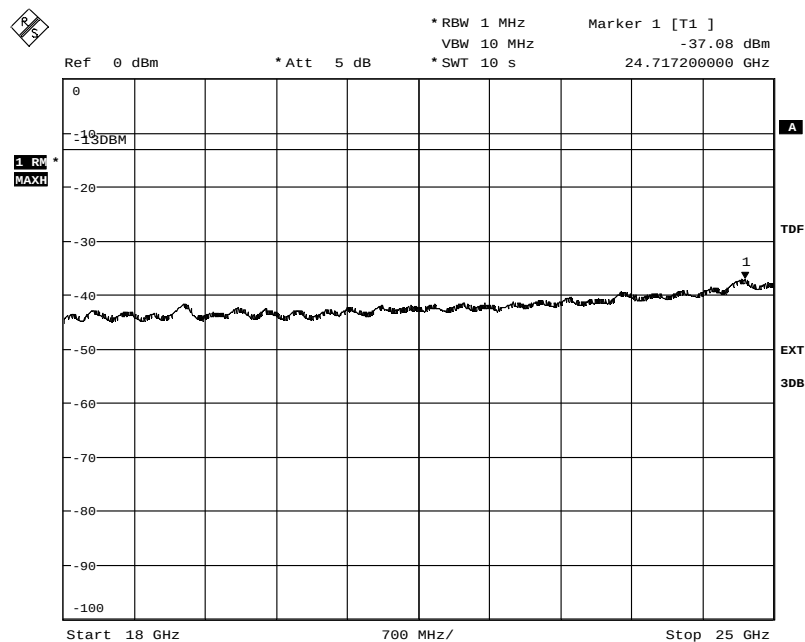

Date: 29.NOV.2012 09:18:43


Appendix 5

Diagram 9:

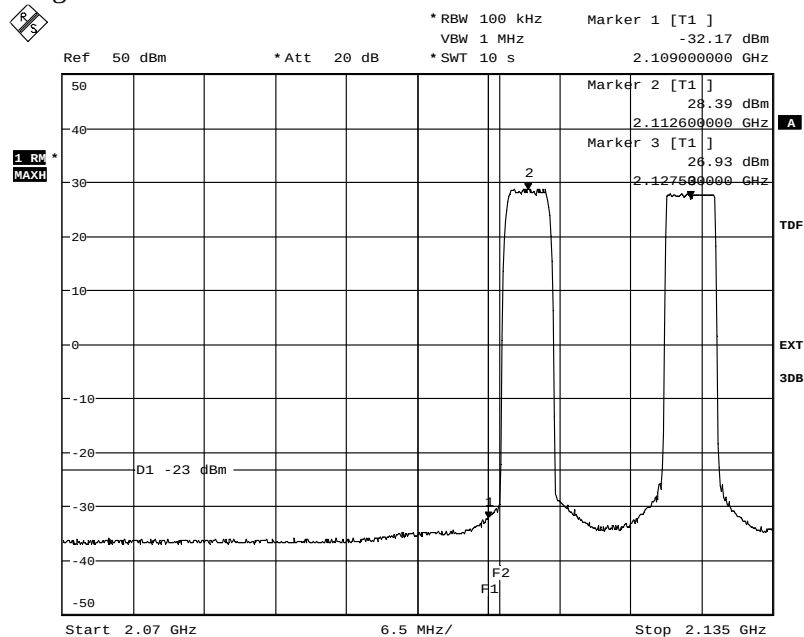

Date: 29.NOV.2012 13:35:08


Diagram 10:

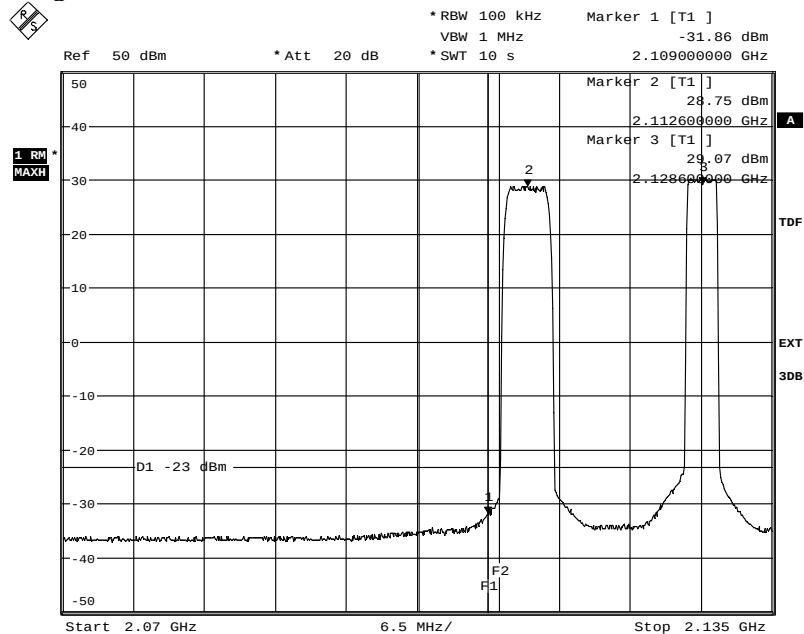

Date: 29.NOV.2012 13:18:59

Appendix 5


Diagram 11:

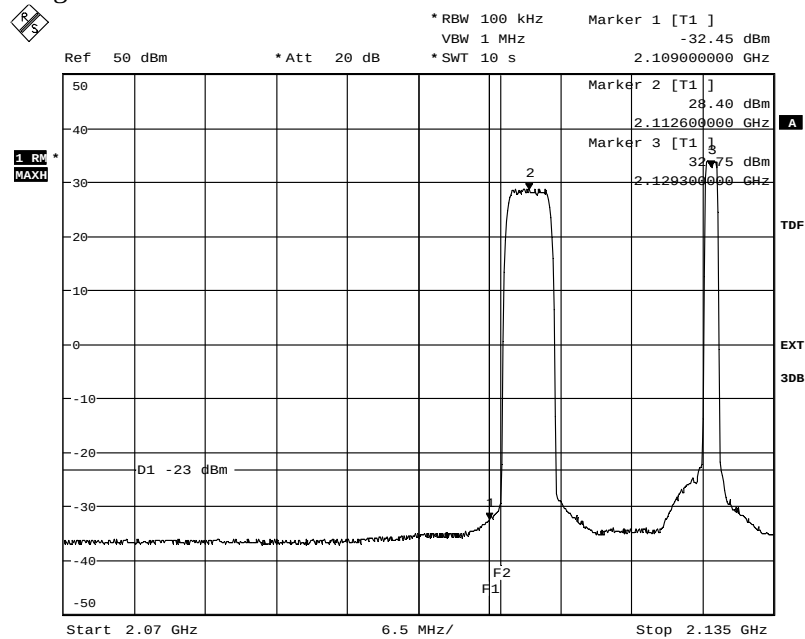

Date: 29.NOV.2012 13:30:34


Appendix 5

Diagram 12a:

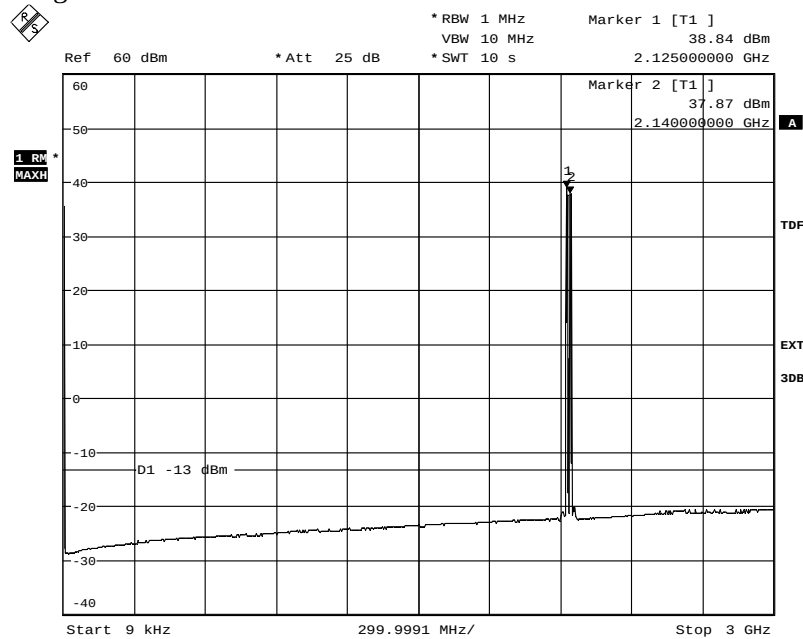

Date: 29.NOV.2012 14:24:23


Diagram 12b:

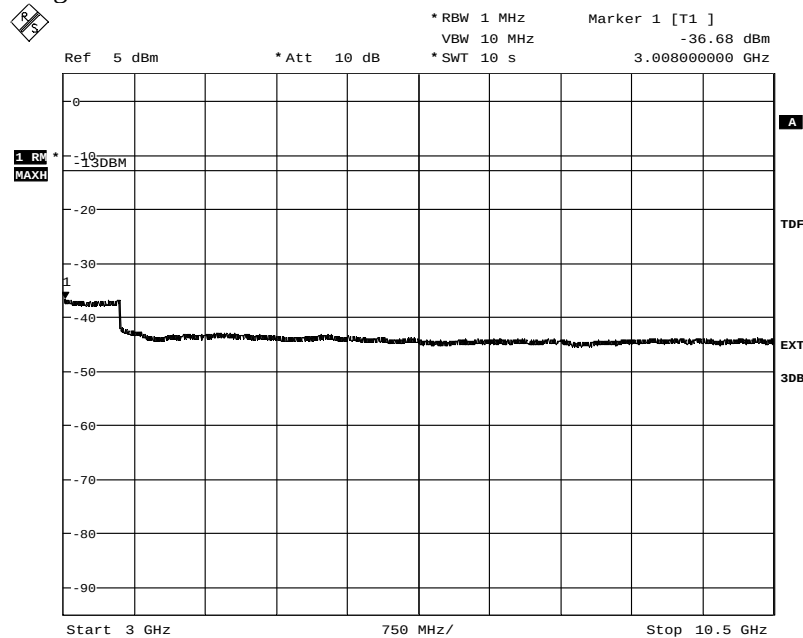

Date: 29.NOV.2012 14:26:12


Appendix 5

Diagram 12c:

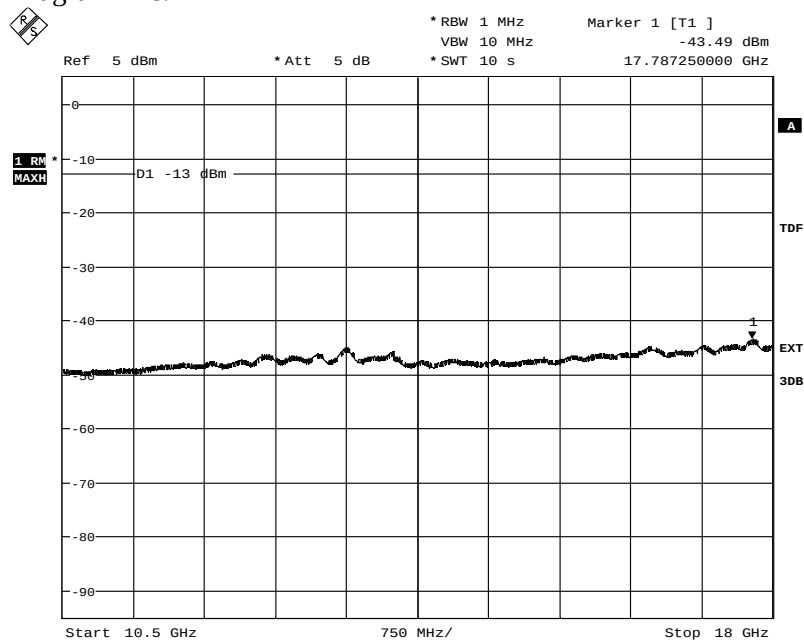

Date: 29.NOV.2012 14:27:23


Diagram 12d:

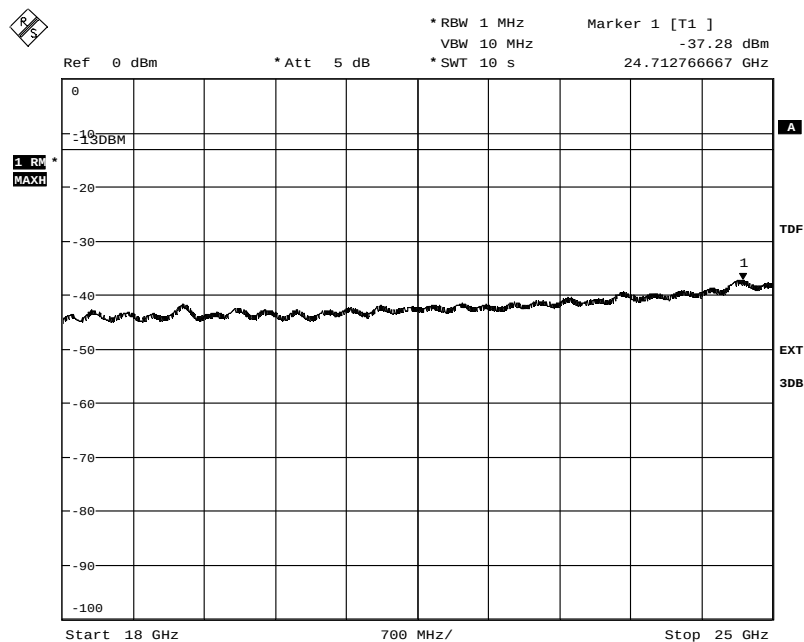

Date: 29.NOV.2012 14:28:22


Appendix 5

Diagram 13 a:

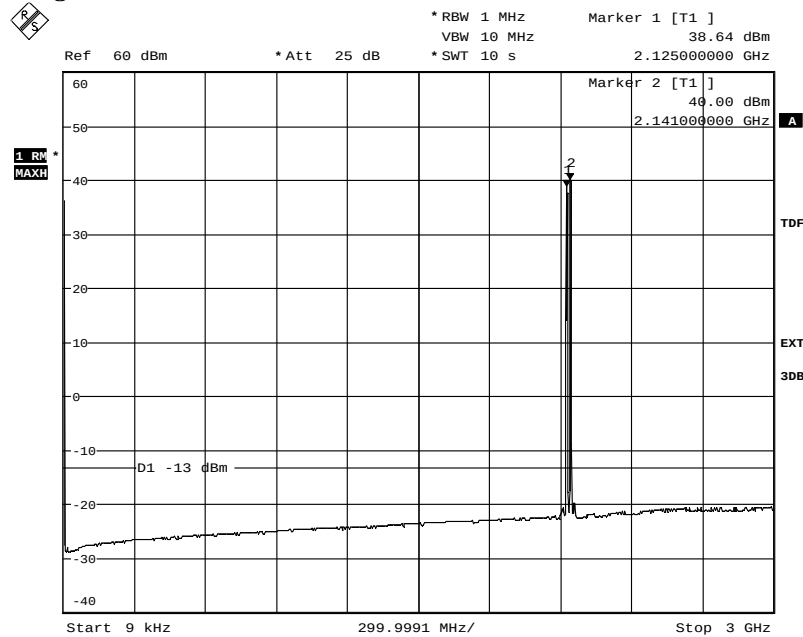

Date: 29.NOV.2012 14:34:32


Diagram 13 b:

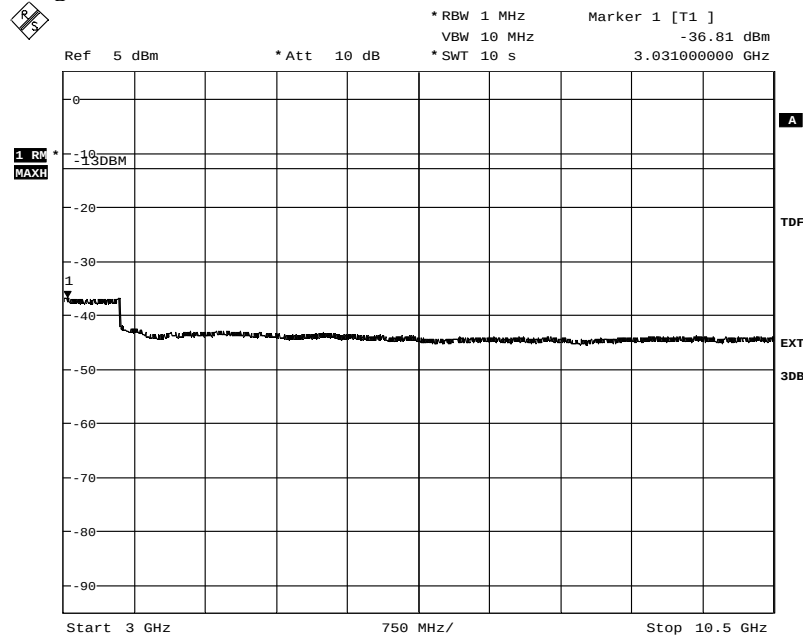

Date: 29.NOV.2012 14:33:06


Appendix 5

Diagram 13 c:

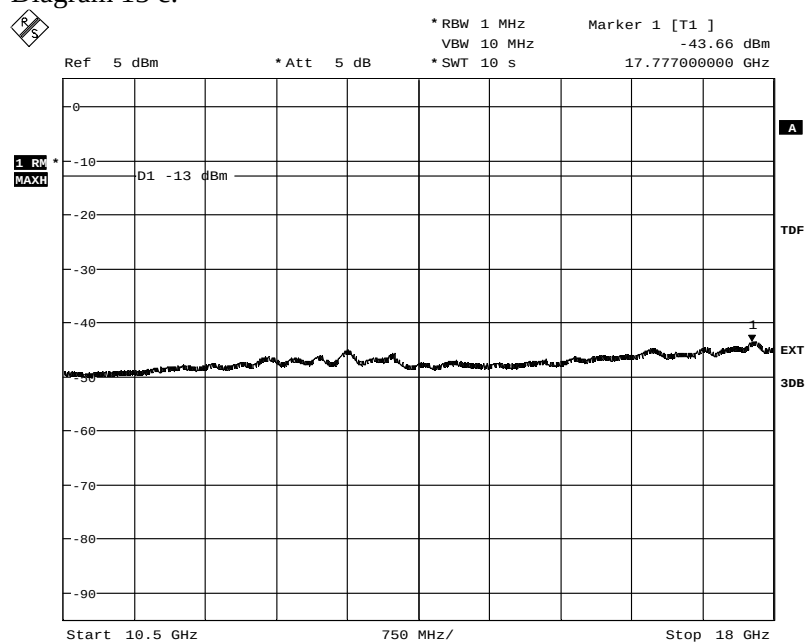

Date: 29.NOV.2012 14:31:48


Diagram 13 d:

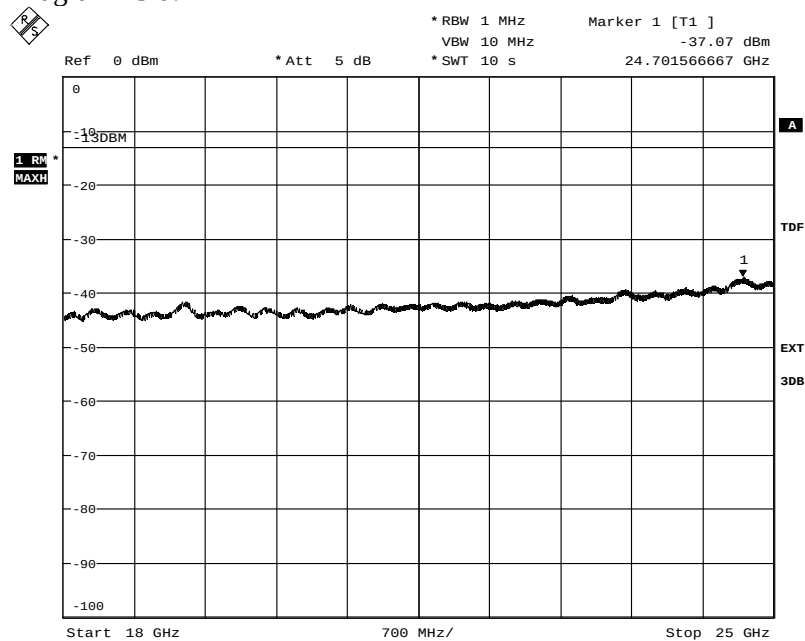

Date: 29.NOV.2012 14:30:41


Appendix 5

Diagram 14 a:

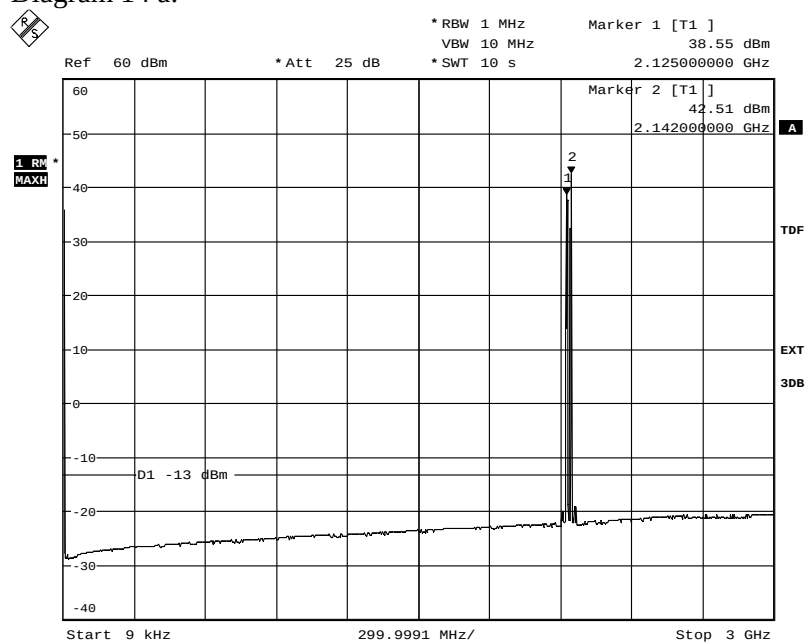

Date: 29.NOV.2012 15:10:04


Diagram 14b:

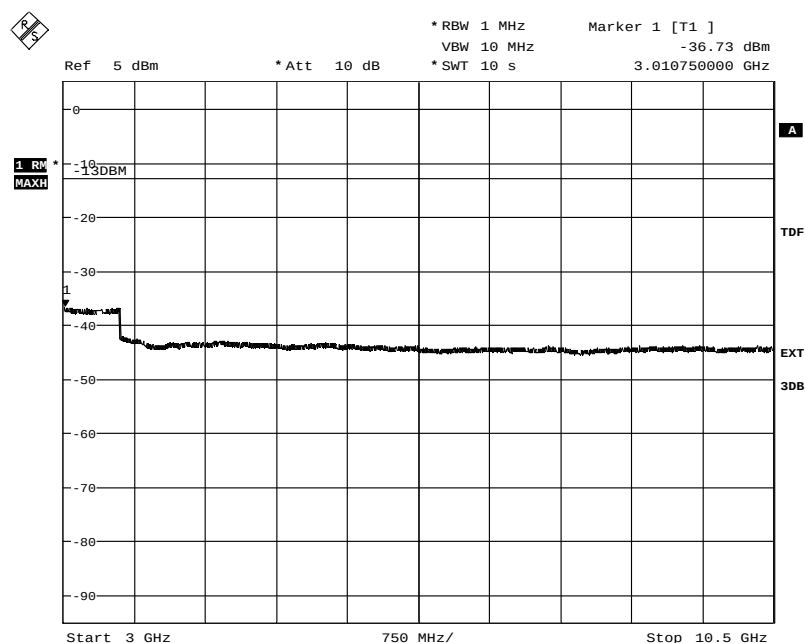

Date: 29.NOV.2012 15:12:08


Appendix 5

Diagram 14 c:

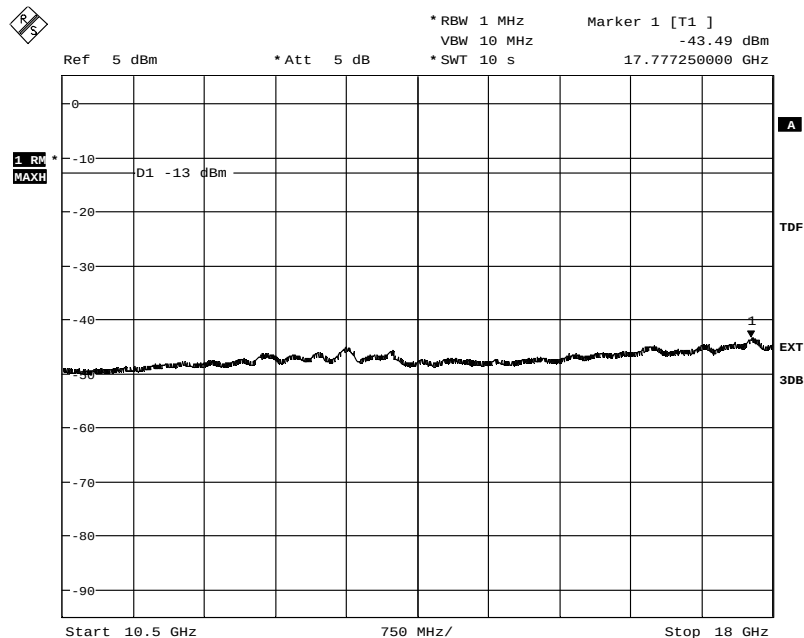

Date: 29.NOV.2012 15:13:12


Diagram 14 d:

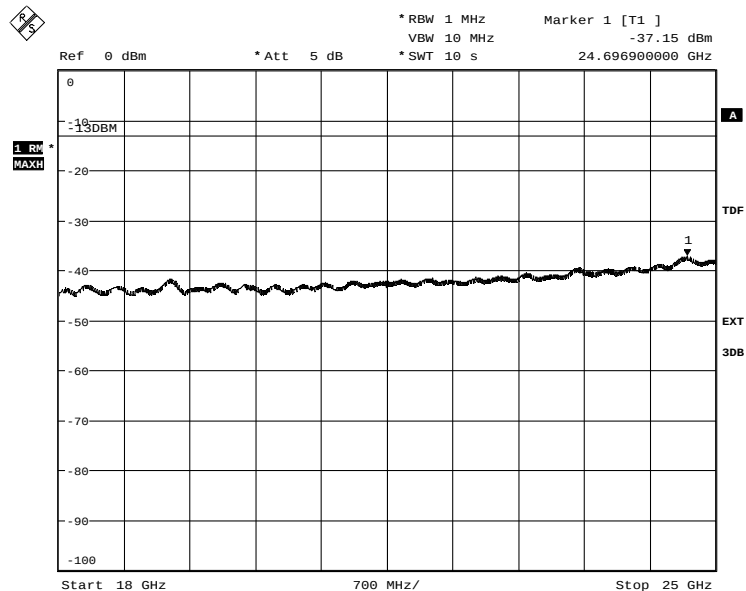

Date: 29.NOV.2012 15:14:18


Appendix 5

Diagram 15:

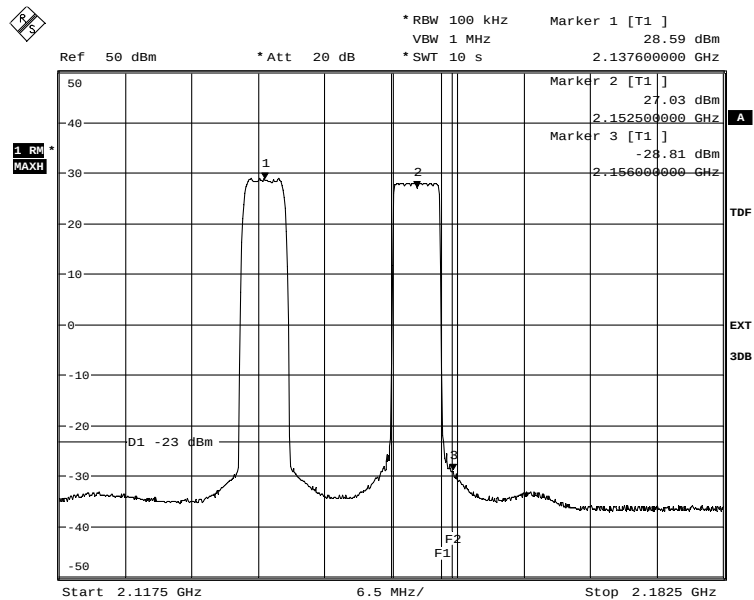

Date: 29.NOV.2012 13:59:45


Diagram 16:

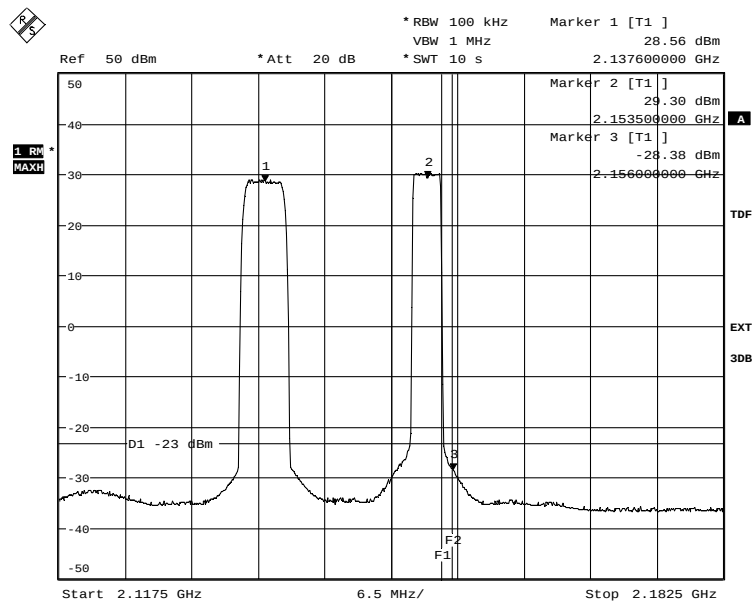

Date: 29.NOV.2012 14:03:15

Appendix 5

Diagram 17:

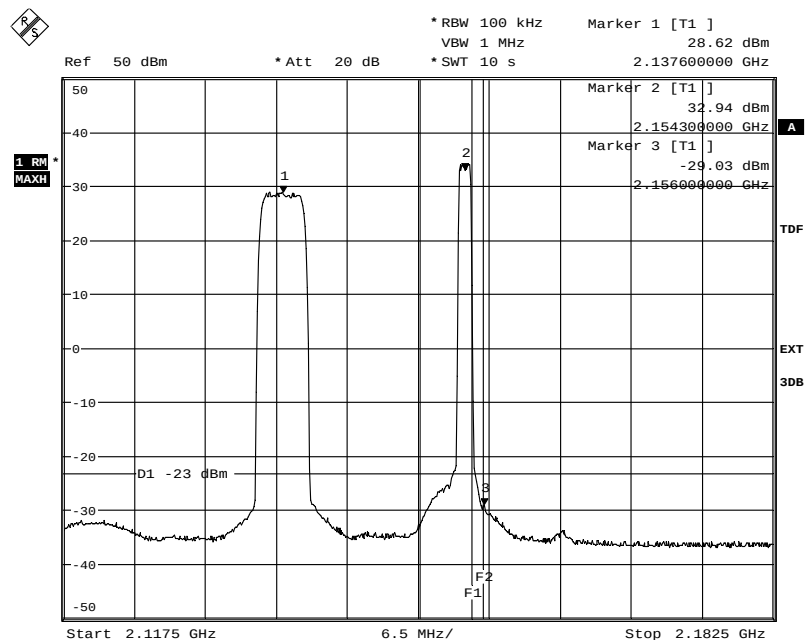

Date: 29.NOV.2012 14:06:15

Appendix 5

Remark

The emission at 9 kHz on the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

The highest internal frequency as declared by the client was 2.4576 GHz, thus the choice of the upper frequency boundary was set to $10 \times 2.5 \text{ GHz} = 25 \text{ GHz}$ for emission measurements.

Limits

§27.53(h) and RSS-139 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P) \text{ dB}$, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

Appendix 6

Field strength of spurious radiation measurements according to 47 CFR 27.53 (h) / IC RSS-139 6.5

Date	Temperature	Humidity
2012-10-30	23°C ± 3°C	26 % ± 5 %
2012-11-13	23°C ± 3°C	32 % ± 5 %

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-1.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18 - 25 GHz.

In the frequency range 30 MHz - 25 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was

$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.


Appendix 6

The test set-up during the spurious radiation measurements is shown in the pictures below:

MIMO:



MSR:

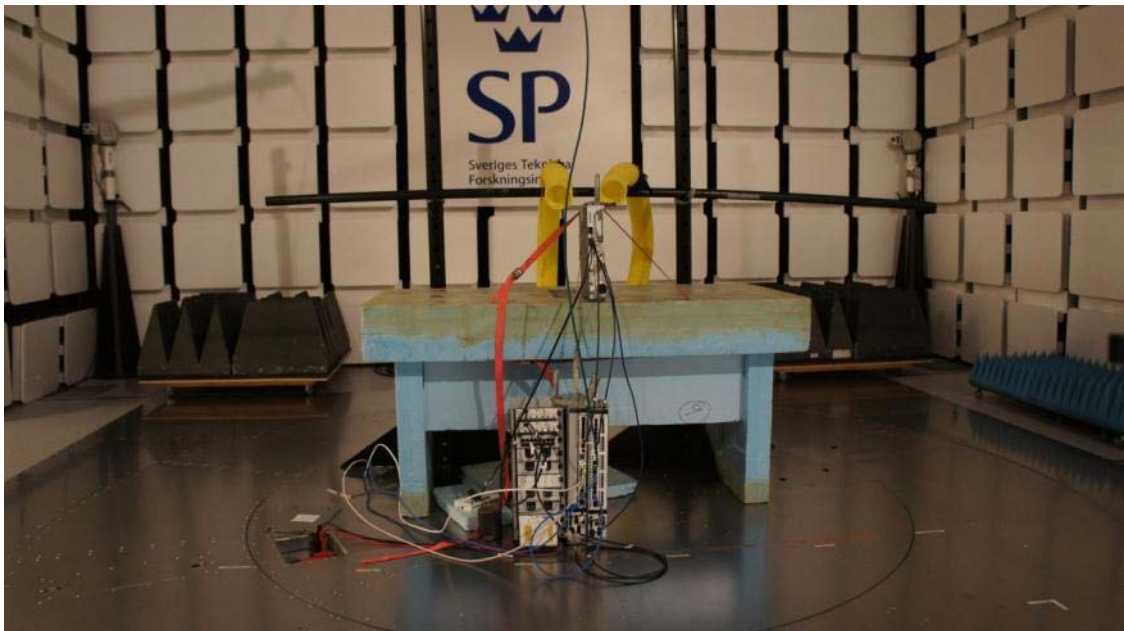

Appendix 6

Measurement equipment

Measurement equipment	SP number
Semi anechoic chamber	503 881
R&S ESU 26	901 553
EMC 32 ver. 8.52.0	503 745
Chase Bilog Antenna CBL 6111A	502 181
EMCO Horn Antenna 3115	502 175
Flann STD Gain Horn Antenna 20240-20	503 674
High pass filter, RLC Electronics	503 739
Miteq, Low Noise Amplifier	503 285
µComp Nordic, Low Noise Amplifier	901 545
Temperature and humidity meter, Testo 625	504 188

Tested configurations

LTE

B, 1.4 MHz BW

M, 1.4 MHz BW

T, 1.4 MHz BW

WCDMA

T+(T-5)

MSR, W+L

Configuration 10

Results, representing worst case

LTE, T, 1.4MHz BW Diagram 1: a-d

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
4308.7	-19.6	-
30-25 000	All other emission > 20 dB below limit	All emission > 20 dB below limit

Appendix 6

WCDMA, T+(T+5), Diagram 2: a-d

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
4305.2	-29.7	-
30-25 000	All other emission > 20 dB below limit	All emission > 20 dB below limit

MSR, LTE+WCDMA Configuration 10, Diagram 3: a-d

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
4308.7	-23.3	-
30-25 000	All other emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty:

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz

Limits

§27.53(h) and RSS-139 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

Appendix 6

Diagram 1a:


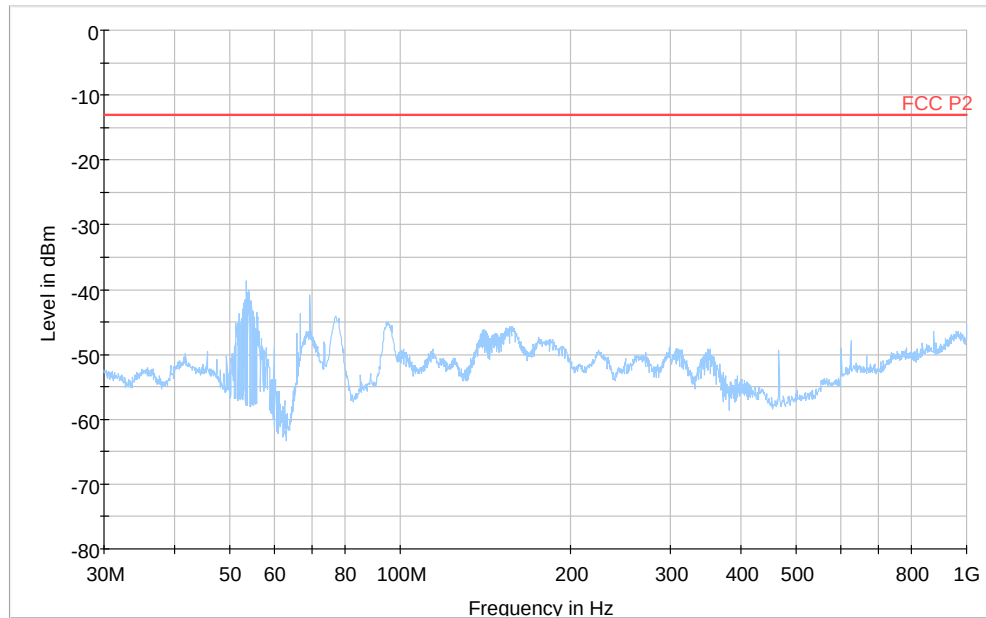



Diagram 1b:

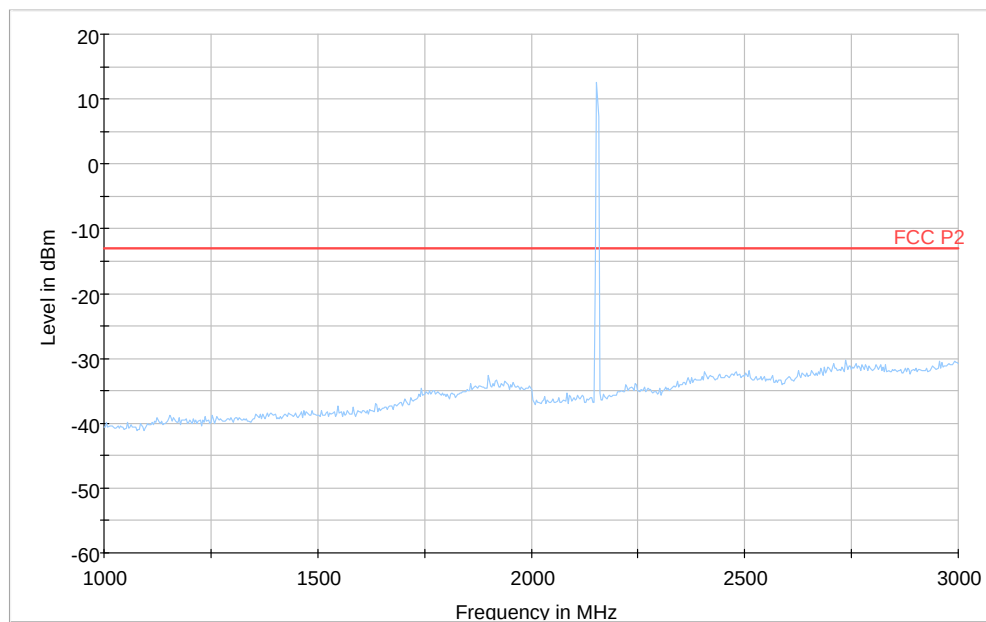

Note: The emission at 2154.3 MHz is the carrier frequency and shall be ignored in the context.

Appendix 6

Diagram 1c:

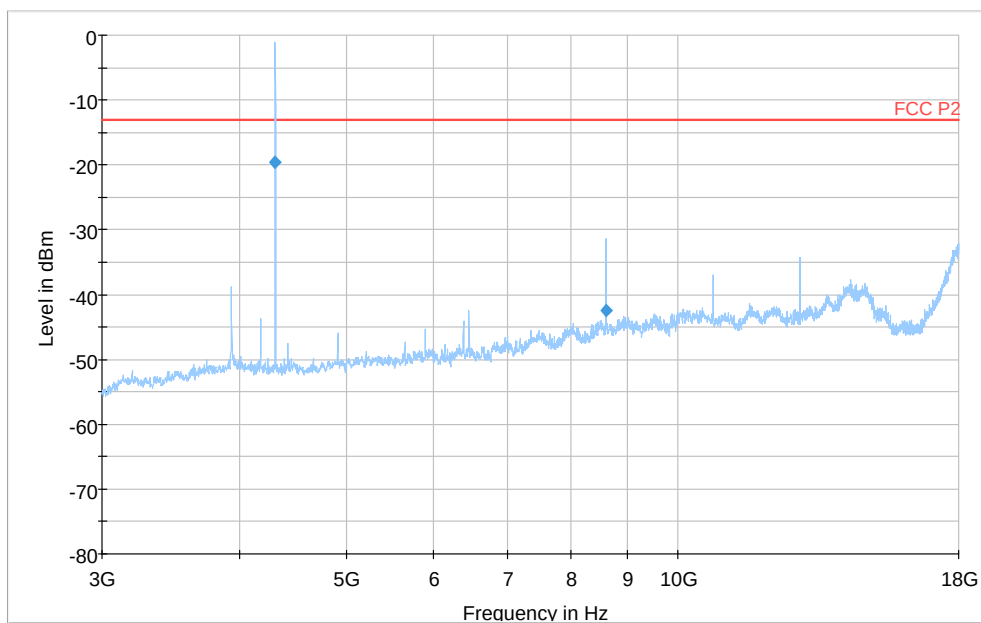


Final RMS Result

Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
4308.714712	-19.6	5000.0	1000.000	100.0	V	126.0	-103.2	-6.6	-13.0
8618.084847	-42.5	5000.0	1000.000	109.0	H	17.0	-93.6	29.5	-13.0

Note: Final result for the frequency 4308.7 MHz was measured with substitution method according to the standard.

Appendix 6

Diagram 1d:

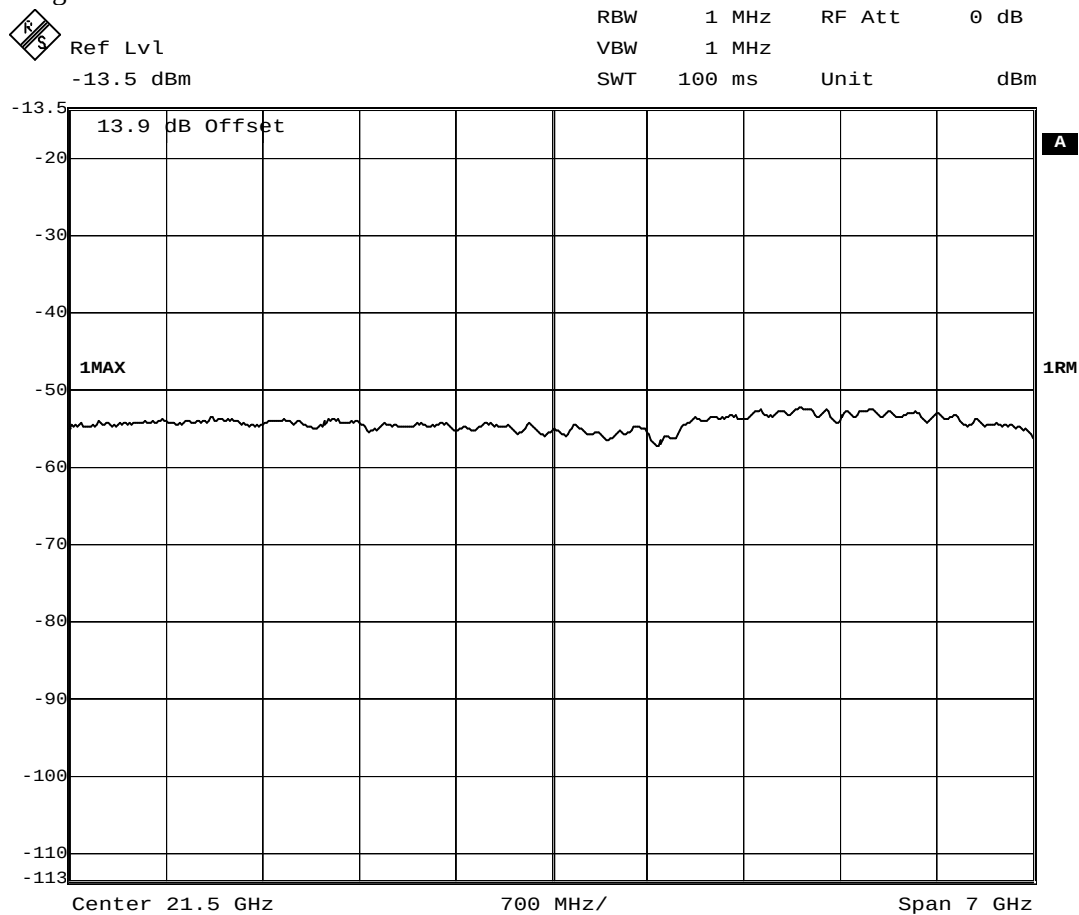

Date: 29.OCT.2012 12:08:38

Appendix 6

Diagram 2a:


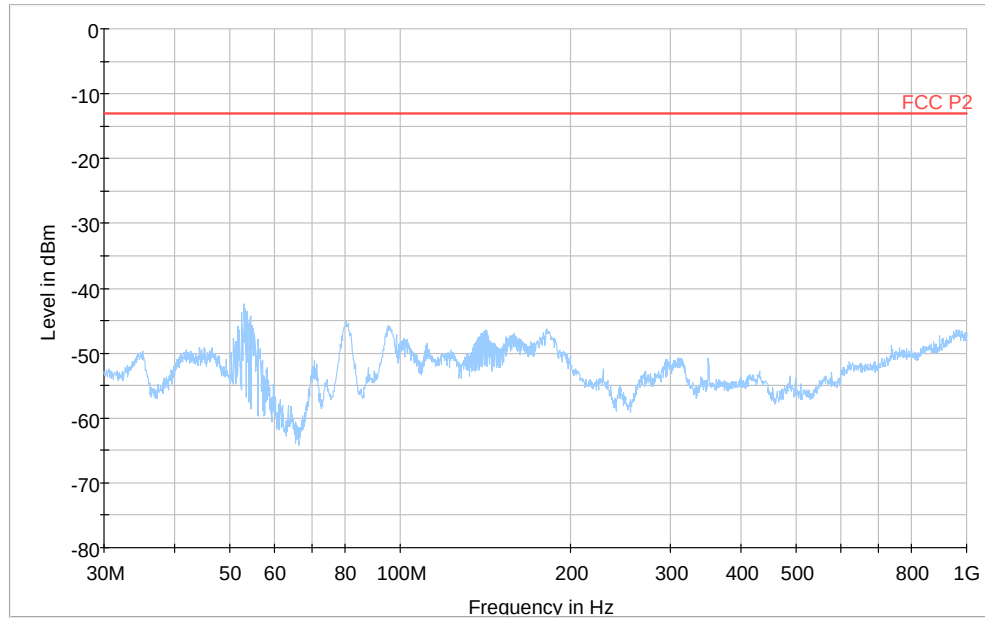



Diagram 2b:

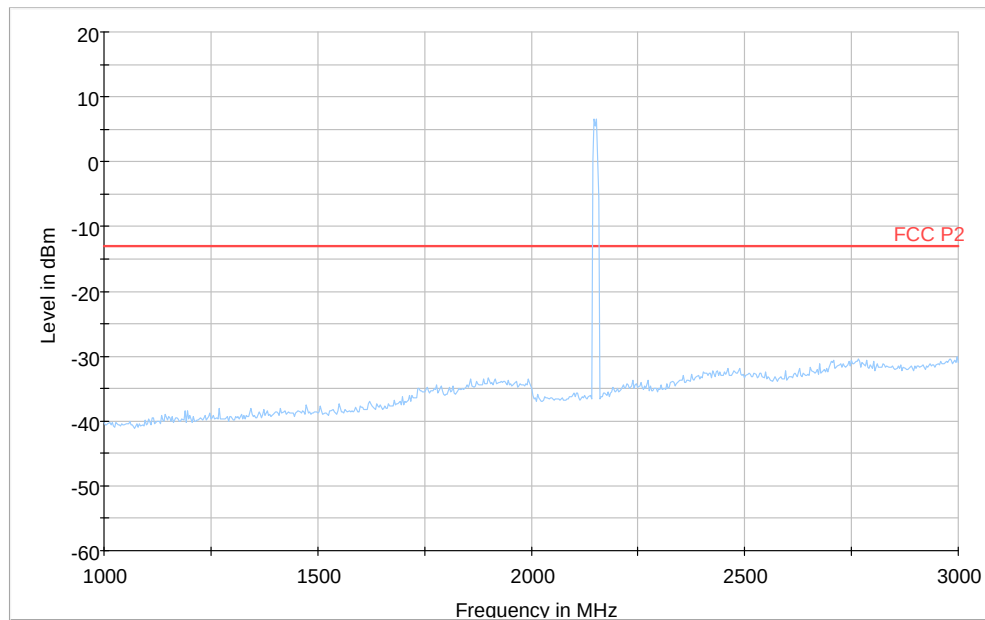

Note: The emission at 2147.6 MHz and 2152.6 MHz are the carrier frequencies and shall be ignored in the context.

Appendix 6

Diagram 2c:

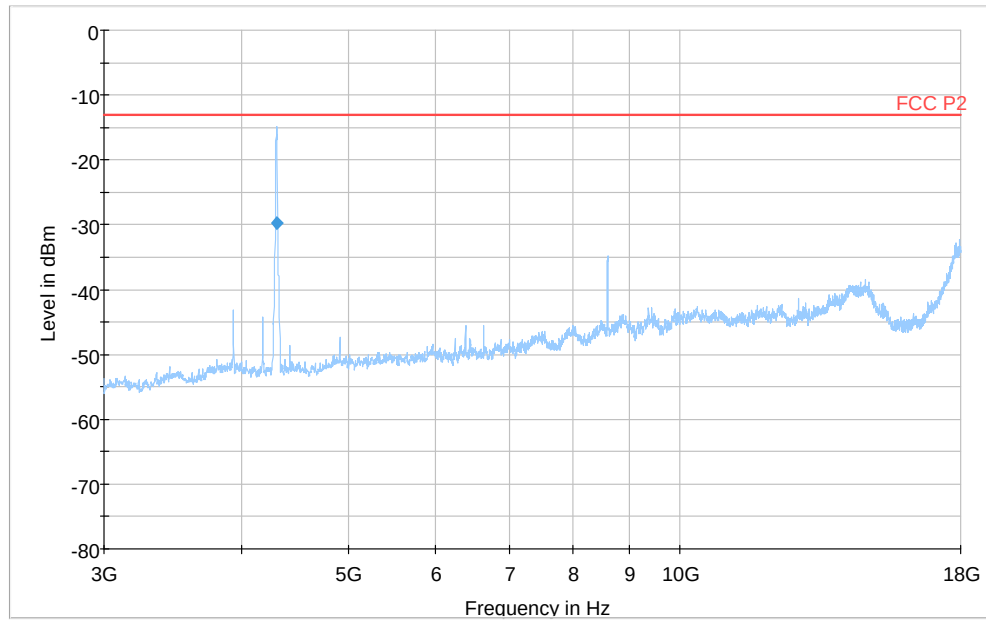


Final RMS Result

Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
4305.207096	-29.7	5000.0	1000.000	104.0	V	69.0	-103.2	16.7	-13.0

Appendix 6

Diagram 2d:

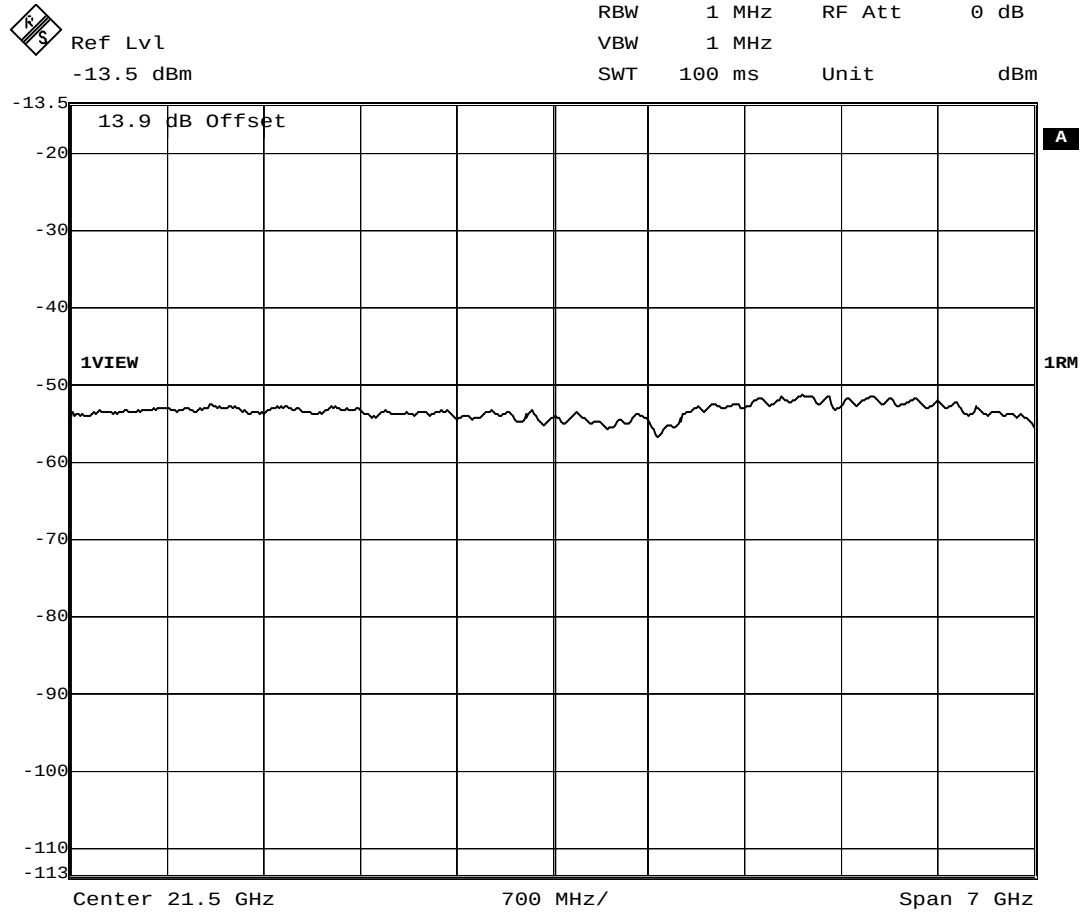

Date: 13.NOV.2012 14:35:51

Appendix 6

Diagram 3a:


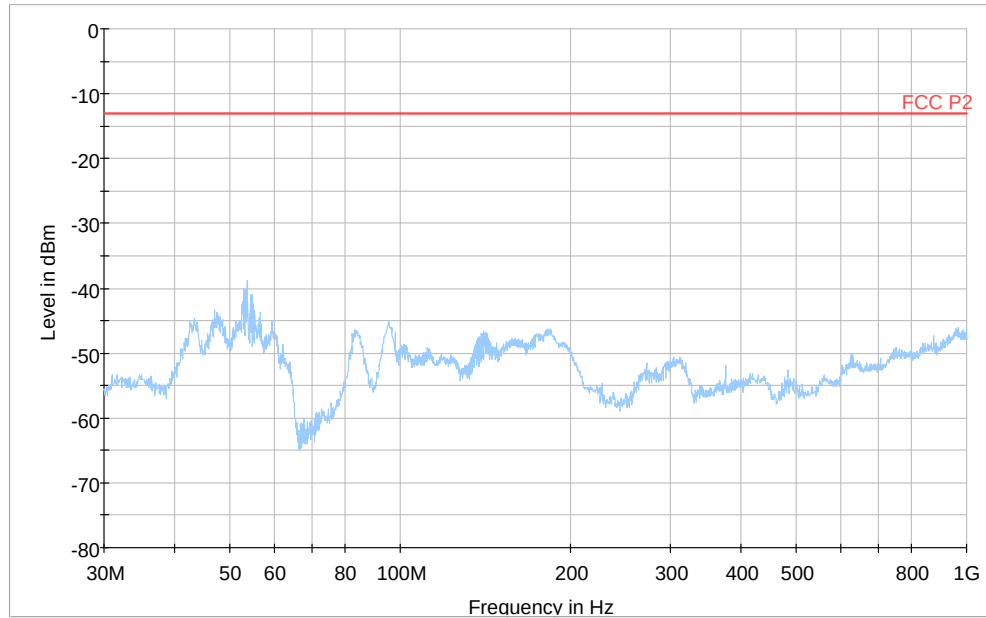



Diagram 3b:

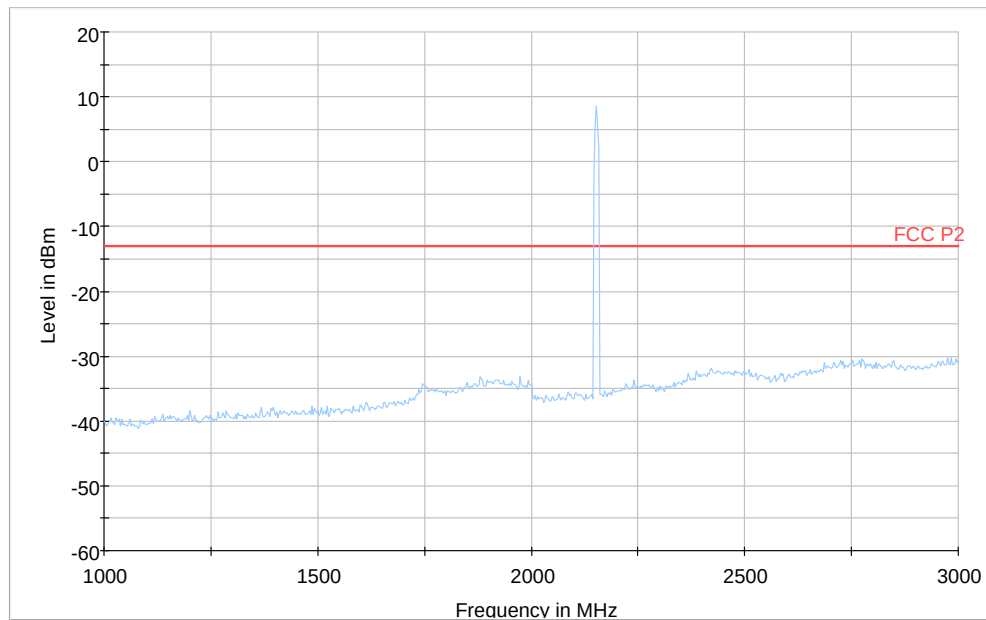

Note: The emission between 2151 MHz and 2154.3 MHz are the carrier frequencies and shall be ignored in the context.

Appendix 6

Diagram 3c:

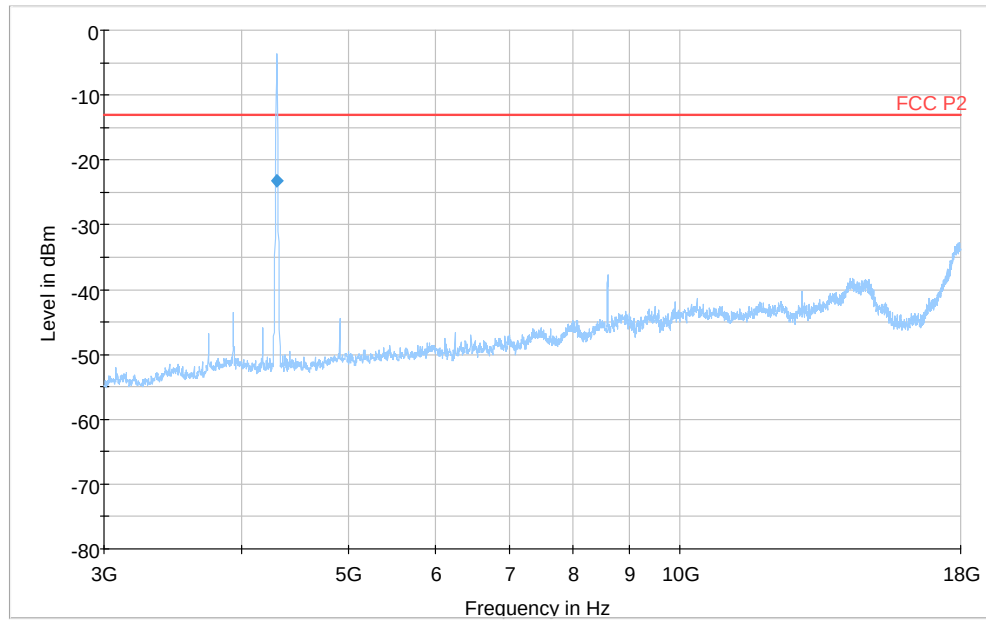


Final RMS Result

Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
4308.714712	-23.3	5000.0	1000.000	110.0	V	128.0	-103.2	-10.3	-13.0

Note: Final result was measured with substitution method according to the standard.

Appendix 6

Diagram 3d:

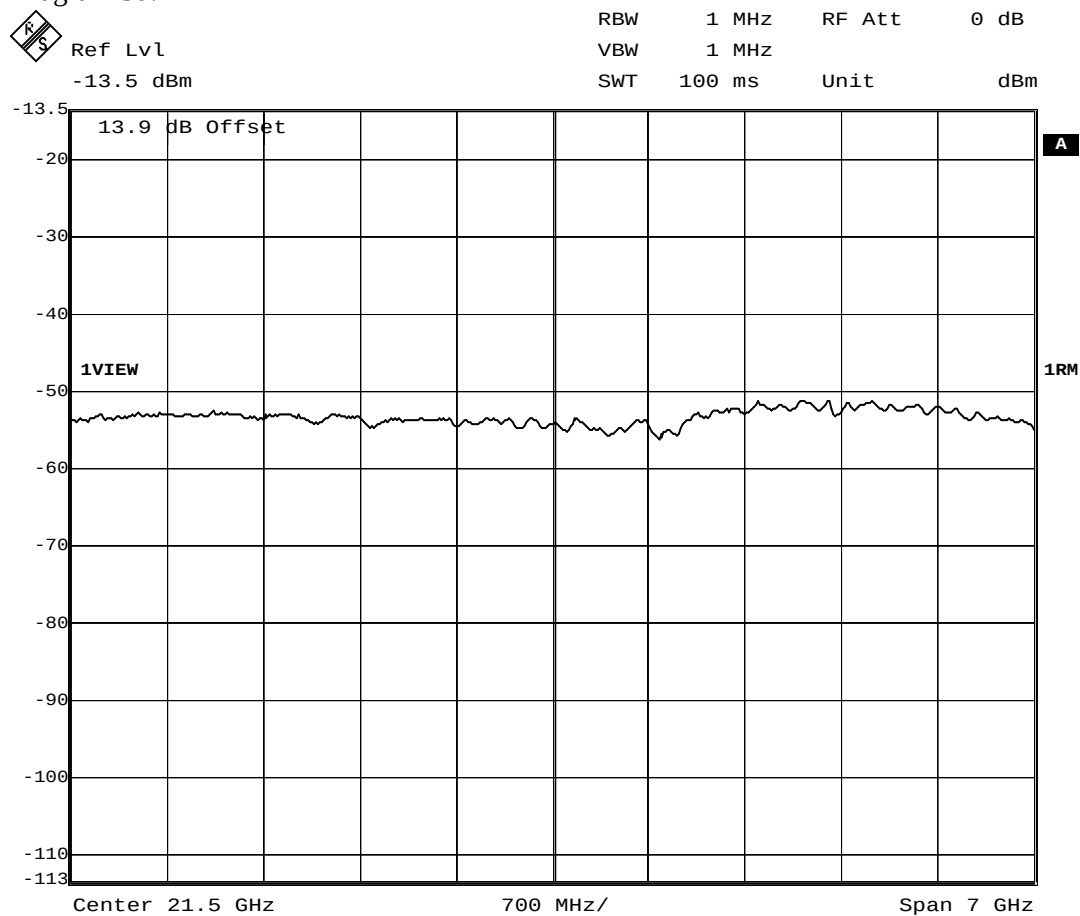


Date: 13.NOV.2012 18:30:44

Appendix 7


External photos

Front side

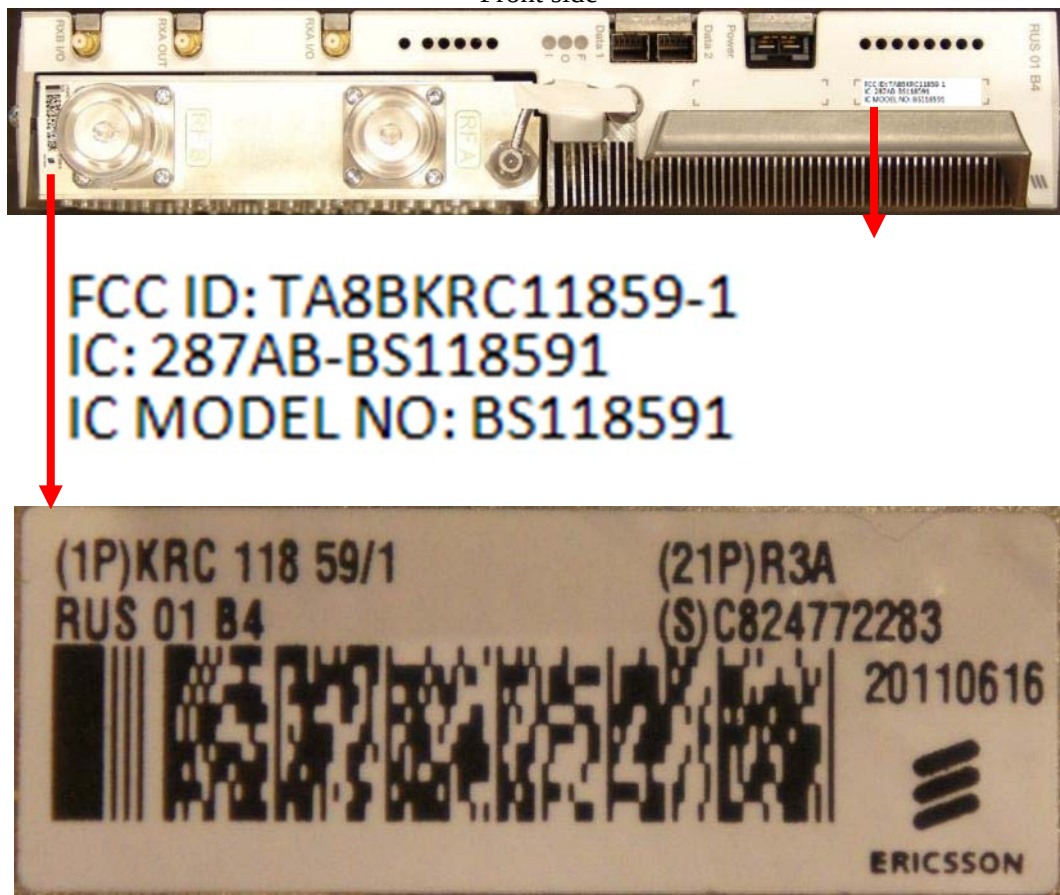


Appendix 7

Rear side

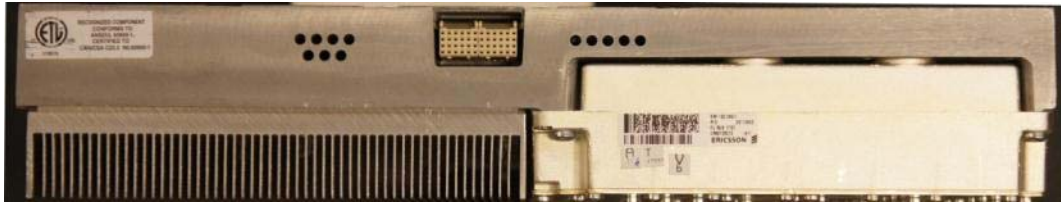

Left side

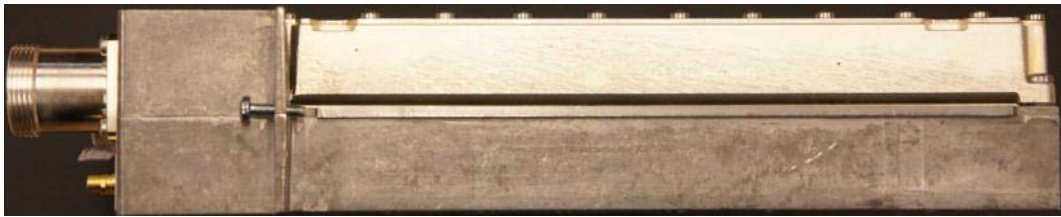


Right side



Appendix 7

Bottom side

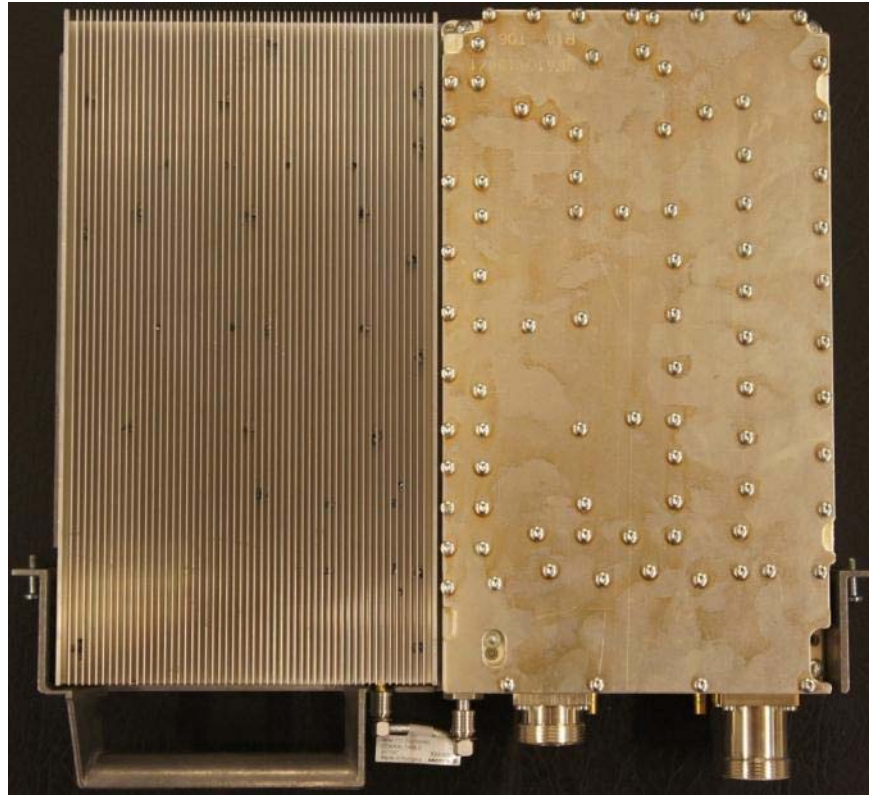

Top side

