

Ericsson AB
Camilla Karlsson
PDU HW
Lindhospiren 11
417 56 Göteborg

Radio measurements on RRUS 12 B4 1700/2100 MHz radio equipment with FCC ID: TA8BKRC161349-2 and IC: 287AB-BS1613492 (8 appendices)

Test object

Product name: RRUS 12 B4
Product number: KRC 161 349/2, R1C

Summary

See appendix 1 for general information and appendix 8 for external photos.


Standard	Compliant	Appendix
FCC CFR 47 / IC RSS-139 ISSUE 2		
2.1046 / RSS-139 6.4 RF power output conducted	Yes	2
2.1049 / RSS-Gen 4.6.1 Occupied bandwidth	Yes	3
2.1051 / RSS-139 6.5 Band edge	Yes	4
2.1051 / RSS-139 6.5 Spurious emission at antenna terminals	Yes	5
2.1053 / RSS-139 6.5 Field strength of spurious radiation	Yes	6
2.1055 / RSS-139 6.3 Frequency stability	Yes	7

Note: Above RSS-139 items are given as cross-reference only. Measurements were performed according to ANSI procedures referenced by FCC and covered by SP's accreditation.


SP Technical Research Institute of Sweden

Electronics - EMC

Performed by


Tomas Lennhager

Examined by


Anders Nordlöf

SP Technical Research Institute of Sweden

Postal address

SP
Box 857
SE-501 15 BORÅS
Sweden

Office location

Västeråsen
Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Table of contents

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Test setups	Appendix 1
Purpose of test	Appendix 1
RF power output conducted	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Frequency stability	Appendix 7
External photos	Appendix 8

Appendix 1

Description of the test object

Equipment:	Product name: RRUS 12 B4 Product number: KRC 161 349/2,R1C FCC ID TA8BKRC161349-2 IC 287AB-BS1613492 IC MODEL NO: BS1613492
Tested configuration:	WCDMA single RAT
Frequency bands:	TX: 2110 – 2155 MHz RX: 1710 – 1755 MHz
Antenna ports:	2 TX/RX ports
RF configurations:	Single carrier, multi carrier and MIMO 2x2
Nominal RF output power per antenna port:	Single carrier: 1x 47.8 dBm (1 x 60W) Multi carrier: 2 x 44.8 dBm (2 x 30W) 3 x 43.0 dBm (3 x 20W) 4 x 41.8 dBm (4 x 15W) In MIMO configuration the maximum nominal output power is limited to 47 dBm (50W) per carrier and port.
Antenna:	No dedicated antenna, handled during licensing
Modulations:	QPSK, 16QAM and 64QAM
Channel bandwidths:	4.2 to 5 MHz (configurable in steps of 100/200 kHz)
Channel spacing:	4.4 to 5 MHz (configurable in steps of 100/200 kHz)
Nominal supply voltage:	-48VDC

Appendix 1

Operation mode during measurements

Measurements were performed with the test object transmitting the Test model 1 which are defined in 3GPP TS 25.141. Test model 1 (TM1) represent QPSK modulation. Test model 5 (TM5) includes the 16QAM modulation and Test model 6 (TM6) includes the 64QAM modulation.

The settings below were deemed representative for all traffic scenarios when settings with different modulations, channel bandwidths, number of carriers and RF configurations has been tested to find the worst case setting. All measurements were performed with the test object configured for maximum transmit power. The settings below were used for all measurements if not otherwise noted.

single carrier, MIMO mode

TM5: 8 HS-PDSCH at 240 ksps + 30 DPCH:s at 30 ksps (SF=128)

multi carrier(2 carriers), MIMO mode

TM5: 8 HS-PDSCH at 240 ksps +30 DPCH:s at 30 ksps (SF=128)

Channel bandwidth 5 MHz

Conducted measurements

The test object was supplied with -48 VDC by an external power supply. Additional connections are documented in the setup drawings below. Complete measurements were made on RF A with additional measurements on RF B to verify that the ports are identical.

Radiated measurements

Test object was powered with -48 VDC. Additional connections are documented in the setup drawings below.

Purpose of test

The purpose of the tests is to verify compliance to the performance characteristics specified in applicable items of FCC CFR 47 and Industry Canada RSS-139 and RSS-Gen.

References

Measurements were done according to relevant parts of the following standards:

ANSI 63.4-2009

ANSI/TIA/EIA-603-C-2004

3GPP TS 25.141, version 11.4.0

CFR 47 part 2, October 1st, 2012

CFR 47 part 27, October 1st, 2012

RSS-Gen Issue 3

RSS-139 Issue 2

Appendix 1

Uncertainties

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor $k=2$ (95% level of confidence).

Compliance evaluation is based on a shared risk principle with respect to the measurement uncertainty.

Reservation

The test results in this report apply only to the particular test object as declared in the report.

Delivery of test object

The test object was delivered 2013-11-13.

Manufacturer's representative

Mihai Simon, Ericsson AB.

Test engineers

Tomas Isbring, Kexin Chen, Jörgen Wassholm, Tomas Lennhager and Rolf Kühn, SP.

Test participant

Mihai Simon, Ericsson AB.

Appendix 1

Measurement equipment

	Calibration Due	SP number
Test site Tesla	2014-01	503 881
R&S FSIQ 40	2014-07	503 738
R&S ESU 26	2014-05	901 553
R&S FSQ 40	2014-03	504 143
Control computer with R&S software EMC32 version 8.52.0	-	503 899
High pass filter	2014-07	901 501
High pass filter	2014-07	901 502
High pass filter	2014-07	504 199
High pass filter	2014-09	901 373
High pass filter	2014-09	503 739
High pass filter	2014-07	503 740
RF attenuator	2014-07	504 159
RF attenuator	2014-07	900 233
RF attenuator	2014-07	900 691
RF attenuator	2014-07	901 384
RF attenuator	2014-07	902 282
Chase Bilog Antenna CBL 6111A	2014-10	503 182
EMCO Horn Antenna 3115	2015-09	502 175
Std.gain horn FLANN model 20240-20	2014-03	503 674
µComp Nordic, Low Noise Amplifier	2014-04	901 545
Schwarzbeck preamplifier BBV 9742	2014-03	504 085
Miteq Low Noise Amplifier	2014-09	503 285
Temperature and humidity meter, Testo 635	2014-06	504 203
Temperature and humidity meter, Testo 625	2014-06	504 188
Temperature Chamber	2013-11	501 031
Multimeter Fluke 87	2014-08	502 190

Appendix 1

Test frequencies during measurements


TX test frequencies

UARFCN Downlink	Frequency [MHz]	Symbolic name	Comment
1537	2112.4	B1	Single carrier TX bottom frequency
1537 1562	2112.4 2117.4	B2	2 carrier TX band bottom constellation
1537 1562 1587 1612	2112.4 2117.4 2122.4 2127.4	B4	4 carrier TX band bottom constellation
1638	2132.6	M1	Single carrier TX band mid frequency
1625 1650	2130.0 2135.0	M2	2 carrier TX band mid constellation
1600 1625 1650 1675	2125.0 2130.0 2135.0 2140.0	M4	4 carrier TX band midconstellation
1738	2152.6	T1	Single carrier TX top frequency
1713 1738	2147.6 2152.6	T2	2 carrier TX band top constellation
1663 1688 1713 1738	2137.6 2142.6 2147.6 2152.6	T4	4 carrier TX band top constellation

All RX frequencies were configured 400 MHz below the corresponding TX frequency according the applicable duplex offset for the operating band.

Appendix 1

Test setup conducted measurements

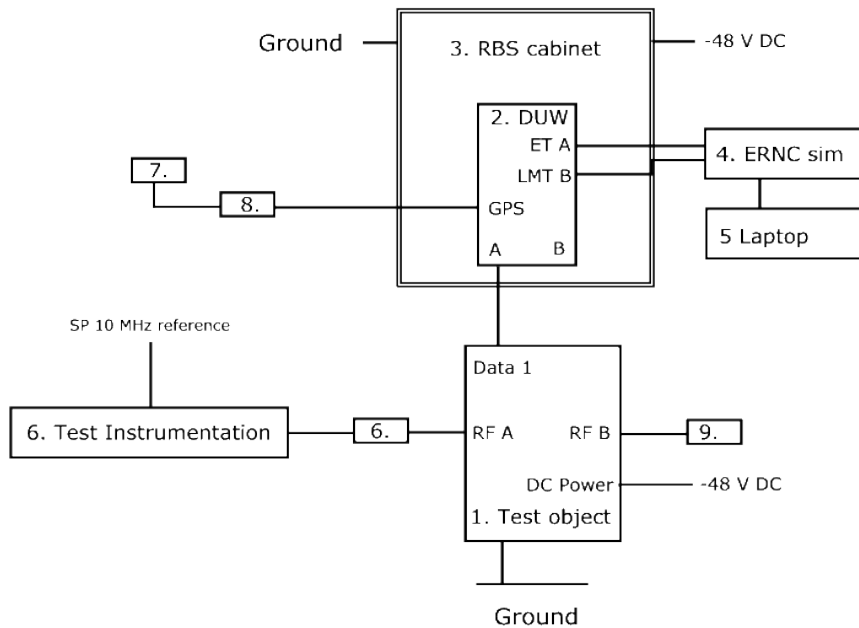

Test object:


1.	RRUS 12 B4, KRC 161 349/2, revision R1C, s/n: C827491665 Software CXP 901 7316/2, revision R51NS FCC ID TA8BKRC161349-2 and IC 287AB-BS1613492
----	--

Functional test equipment

2.	DUW 30 01, KDU 127 161/3, revision R3C, s/n: C824407968 DUW 30 01, KDU 127 161/3, revision R4E, s/n: C825945803
3.	RBS 6201 cabinet, BAMS 1000778792. PDU 02 01, BMG 980 336/4, revision R2A, s/n: BJ31528316
4.	ERNC Sim 145, BAMS – 1000707989 Fast Ethernet switch, Netgear GSM7224, BAMS – 1000517289
5.	Controlling computer SUN ULTRA 27, BAMS 1000758436
6.	SP Test Instrumentation according to measurement equipment list
7.	GPS Active Antenna, KRE 101 2082/1
8.	GPS 02 01, NCD 901 41/1, revision R1D, s/n: TU8K475230
9.	Terminator, 50 ohm

Appendix 1

Test setup radiated measurements

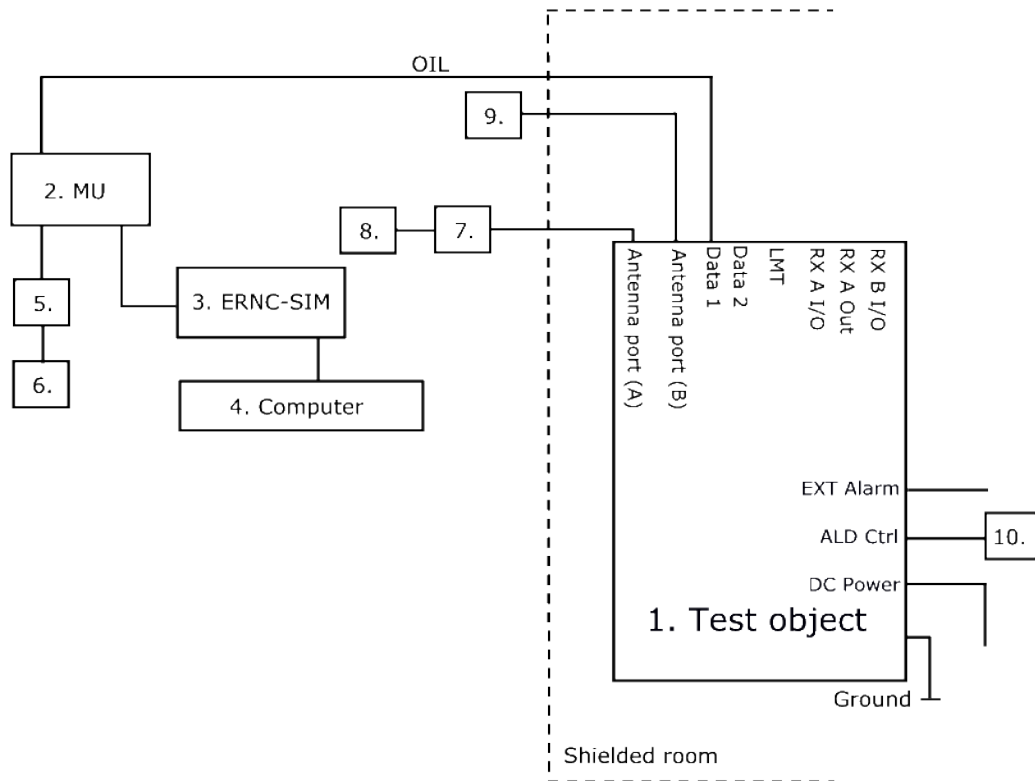

Test object:

1.	RRUS 12 B4, KRC 161 349/2, revision R1C, s/n: C827491666 Software CXP 901 7316/2, revision R51NS FCC ID TA8BKRC161349-2 and IC 287AB-BS1613492
----	--

Functional test equipment:

2.	Main Unit SUP 6601, 1/BFL 901 009/4, revision R1E, s/n: BR82081105 DUW 30 01, KDU 127 161/3, revision R4E, s/n: TU8X621372 SUP 6601, 1/BFL 901 009/4, revision R1E, s/n: BR88237597 DUW 30 01, KDU 127 161/3, revision R4E, s/n: TU8X861906
3.	ERNC-SIM 072, BAMS – 1000579045 Symmetricom SyncServer S250, BAMS – 1000690719 Switch Netgear GSM 7224, BAMS – 1001252309 10 MHz reference Symmetricom 8040, BAMS – 1000645316
4.	Computer Computer, I-ultra27-6 standalone, BAMS – 1000758439 Switch Netgear GSM 7212, BAMS – 1000517298
5.	GPS 02 01, NCD 901 41/1, revision R1D, s/n: TU8K367383
6.	GPS Active Antenna, KRE 101 2082/1
7.	Attenuator
8.	R&S ESI 26, for supervision purposes only
9.	Terminator
10.	RET – Remote Electrical Tilt unit, KRY 121 67/2, revision R1N

Appendix 1

Interfaces:

Power: -48 VDC	DC Power
Antenna port (A), 7/16 connector	Antenna
Antenna port (B), 7/16 connector	Antenna
Data 1, Optical Interface Link, single mode opto fibre	Signal
Data 2, Optical Interface Link, single mode opto fibre	Signal
LMT, for maintenance use only	Telecom
RX A Out, no cable attached	RF
RX A I/O, no cable attached	RF
RX B I/O, no cable attached	RF
EXT Alarm, shielded multi-wire	Signal
ALD Ctrl, shielded multi-wire	Signal
Ground wire	Ground

RBS software:

	Product number	Revision
WCDMA	CXP 902 1719	R4G03

Appendix 2

RF power output measurements according to CFR 47 §27.50 / IC RSS-139 6.4

Date	Temperature	Humidity
2013-11-19	23°C ± 3°C	31 % ± 5 %
2013-11-20	20°C ± 3°C	25 % ± 5 %
2013-11-21	19°C ± 3°C	26 % ± 5 %
2013-12-03	19°C ± 3°C	33 % ± 5 %

Test set-up and procedure

The test object was connected to a signal analyzer measuring peak and RMS output power in CDF mode. A resolution bandwidth of 50 MHz was used.

Measurement equipment	SP number
R&S FSQ 40	504 143
RF attenuator	902 282
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 1.1 dB

Results

Single carrier

Rated output power 1 x 47.8 dBm per RF port.

Symbolic name	Transmitter power [RMS (dBm)/ PAR dB]	
	Port RF A	Port RF B
B1	47.58/ 6.75	47.57/ 6.75
M1	47.75/ 6.75	47.70/ 6.75
T1	47.63/ 6.73	47.28/ 6.75

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Appendix 2

MIMO mode, single carrier

Rated output power 1 x 47.0 dBm per RF port.

Symbolic name	Transmitter power [RMS (dBm)/ PAR dB]		
	Port RF A	Port RF B	Total power ¹⁾
B1	46.73/ 7.36	46.56/ 7.38	49.66
M1	46.95/ 7.36	46.92/ 7.36	49.95
T1	46.75/ 7.36	46.76/ 7.36	49.77

¹⁾: 2 outputs summed power according to FCC KDB662911 Multiple transmitter output v02r01

Note: The PAR value is the 0.1 % Peak to Average Ratio.

MIMO mode, 2-carrier

Rated output power 2 x 44.8 dBm per RF port.

Symbolic name	Transmitter power [RMS (dBm)/ PAR dB]		
	Port RF A	Port RF B	Total power ¹⁾
B2	47.73/ 6.71	47.81/ 6.71	50.78
M2	47.96/ 6.68	48.02/ 6.68	51.00
T2	47.68/ 6.71	47.79/ 6.71	50.75

¹⁾: 2 outputs summed power according to FCC KDB662911 Multiple transmitter output v02r01

Note: The PAR value is the 0.1 % Peak to Average Ratio.

MIMO mode, 4-carrier

Rated output power 4 x 41.8 dBm per RF port.

Symbolic name	Transmitter power [RMS (dBm)/ PAR dB]		
	Port RF A	Port RF B	Total power ¹⁾
B4	47.75/ 6.73	47.87/ 6.75	50.82
M4	47.96/ 6.68	47.79/ 6.66	50.89
T4	47.79/ 6.83	47.81/ 6.80	50.81

¹⁾: 2 outputs summed power according to FCC KDB662911 Multiple transmitter output v02r01

Note: The PAR value is the 0.1 % Peak to Average Ratio.

Appendix 2

Single carrier

Measured output power per 1 MHz.

Symbolic name	[RMS dBm]	
	Port RF A	Port RF B
B	42.33	42.14
M	42.44	42.25
T	42.29	42.31

MIMO mode, single carrier

Measured output power per 1 MHz.

Symbolic name	[RMS dBm]		Total power ¹⁾ [RMS dBm]
	Port RF A	Port RF B	
B	41.38	41.04	44.38
M	41.69	41.70	44.70
T	41.49	41.49	44.49

¹⁾: Measured according to FCC KDB662911 D01 Multiple Transmitter Output v02r01. Method E), 2), c). "Measure and add $10 \log(N_{Ant})$ ".

Remark

This unit is tested without antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/IC Bureau(s). Licensee's are required to take into account maximum allowed antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.

Limits

§27.50:

There is no maximum output power specified for base stations transmitting in the 2110-2155 MHz band. However, a licensee operating a base or fixed station in the 2110-2155 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must coordinate such operations in advance with the parties addressed in the rules.

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

RSS-139 6.4:

The average equivalent isotropically radiated power (e.i.r.p.) limits in SRSP-513 apply, resulting in a maximum EIRP of 3280 W/ MHz for the scope of this report. The peak-to-average ratio PAR of the power shall not exceed 13 dB.

Complies?	Yes
-----------	-----

Appendix 4

Occupied bandwidth measurements according to 47 CFR 2.1049 / RSS-Gen 4.6.1

Date	Temperature	Humidity
2013-11-21	19 °C ± 3 °C	26 % ± 5 %
2013-11-27	21 °C ± 3 °C	33 % ± 5 %
2013-12-03	19 °C ± 3 °C	33 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §2.1049. The output was connected to a signal analyzer with the RMS detector activated. The signal analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
R&S FSQ 40	504 143
RF attenuator	902 282
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Single carrier


Diagram	BW configuration	Tested frequency	Tested Port	Occupied BW (99%) [MHz]
1	5 MHz	B1	RF A	4.18
2	5 MHz	M1	RF A	4.18
3	5 MHz	T1	RF A	4.18

Single carrier, MIMO

Diagram	BW configuration	Tested frequency	Tested Port	Occupied BW (99%) [MHz]
4	5 MHz	B1	RF A	4.17
5	5 MHz	M1	RF A	4.17
6	5 MHz	M1	RF B	4.17
7	5 MHz	T1	RF A	4.17


Appendix 4

Diagram 1:

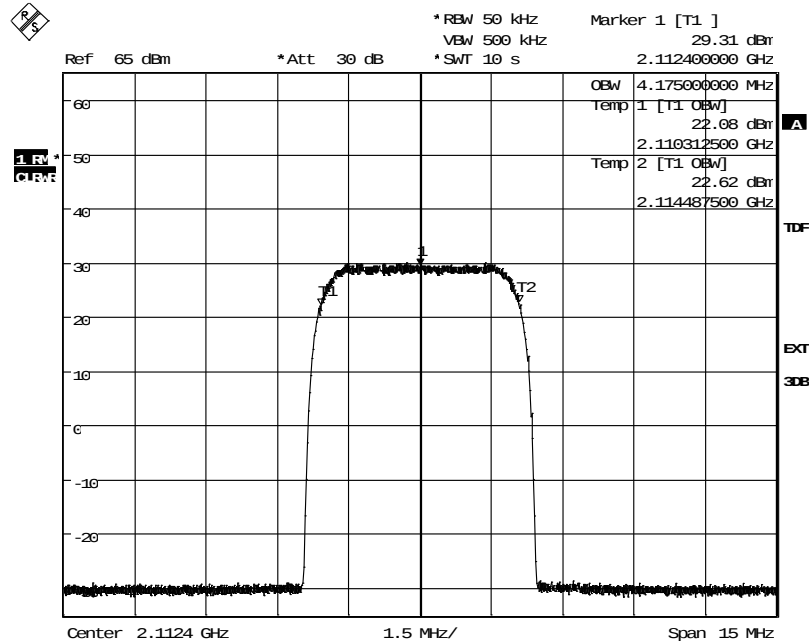

Date: 21.NOV.2013 10:15:39


Diagram 2:

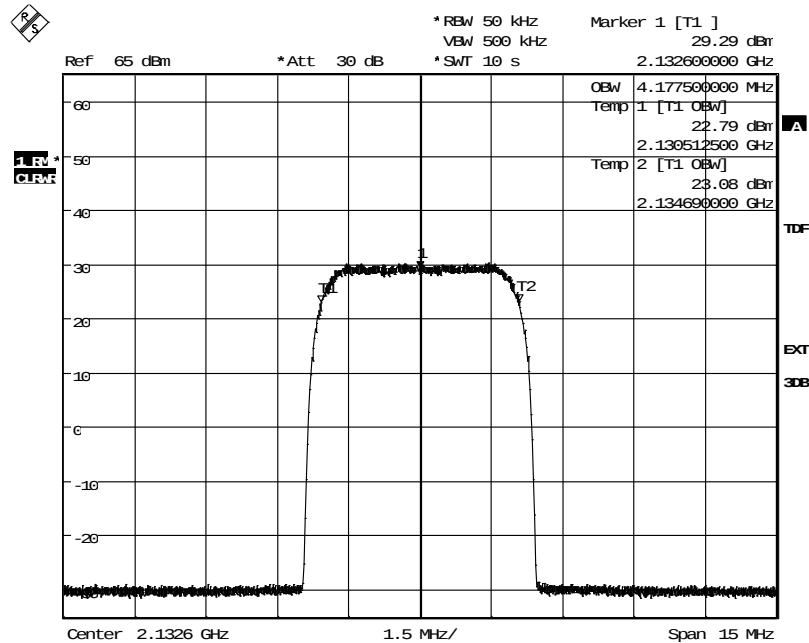

Date: 21.NOV.2013 11:23:04

Appendix 4


Diagram 3:

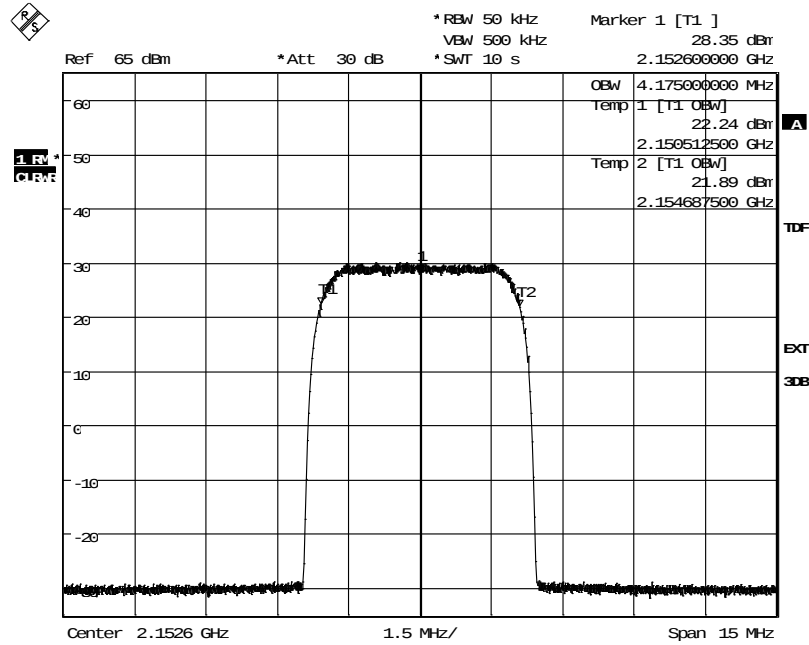

Date: 27.NOV.2013 14:39:44


Appendix 4

Diagram 4:

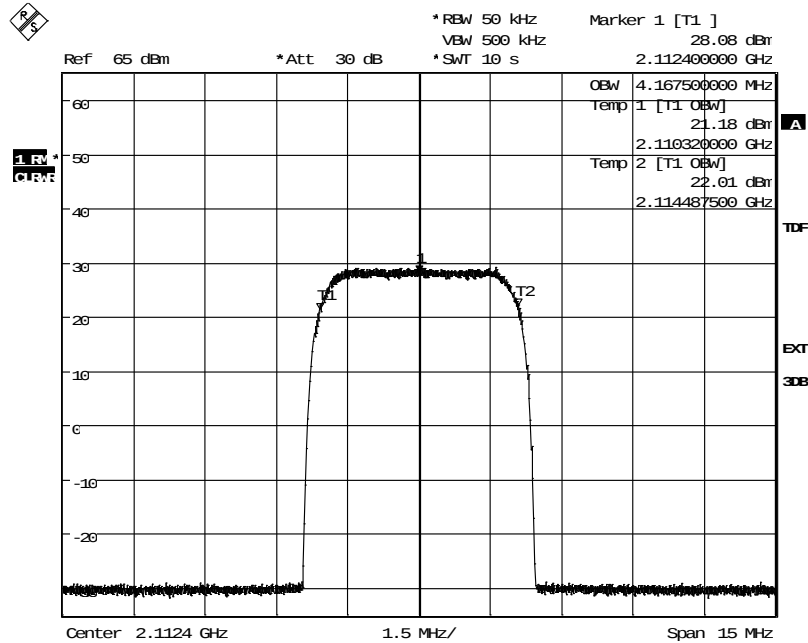

Date: 3.DEC.2013 16:17:40


Diagram 5:

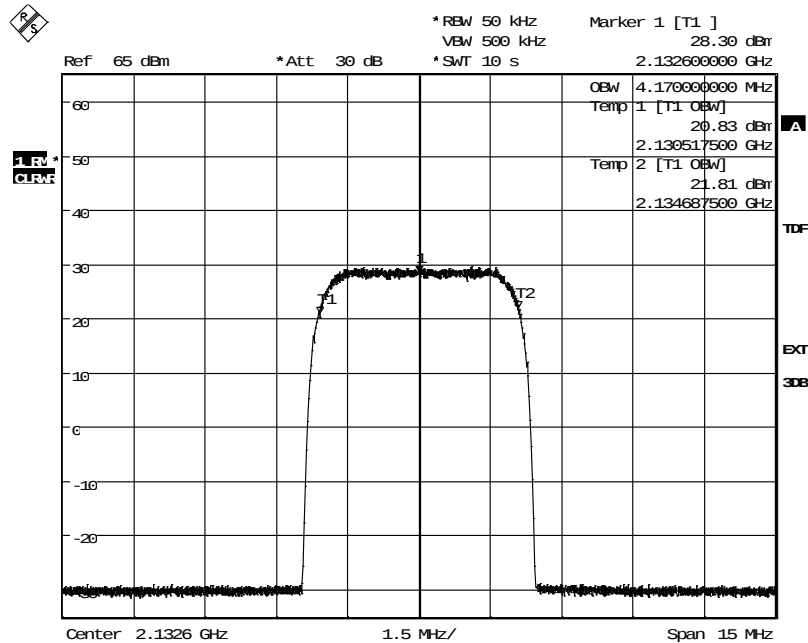

Date: 3.DEC.2013 17:56:25


Appendix 4

Diagram 6:

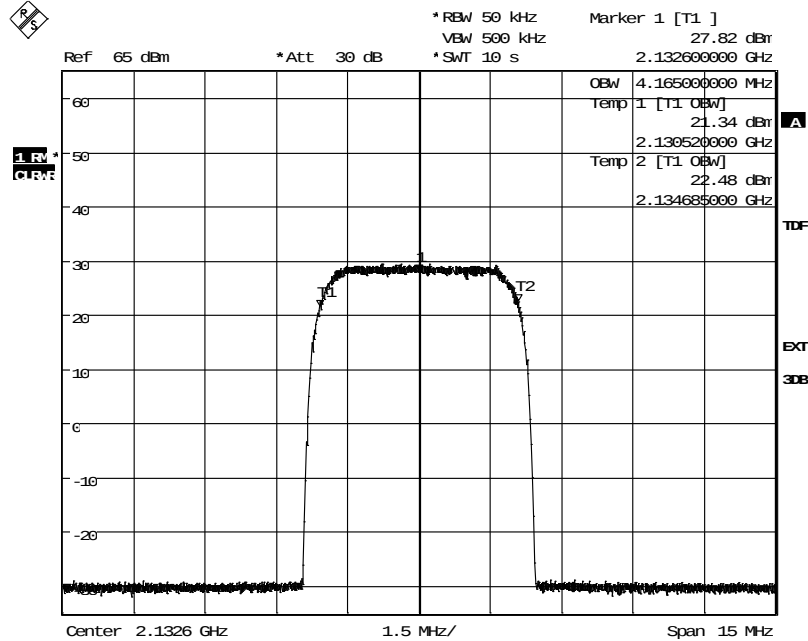

Date: 3.DEC.2013 16:48:16

Diagram 7:

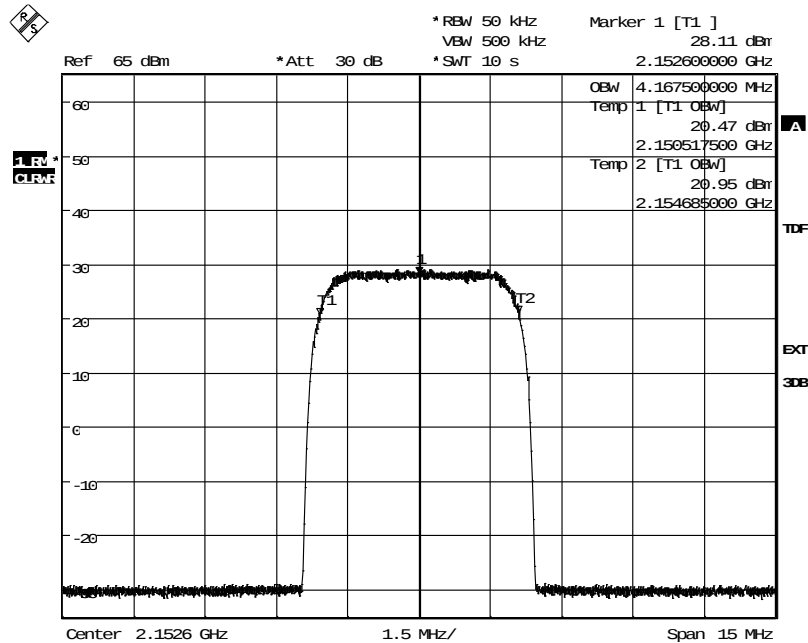

Date: 3.DEC.2013 18:35:02

Appendix 5

Band edge measurements according to CFR 47 §27.53(h) / IC RSS-139 6.5

Date	Temperature	Humidity
2013-11-19	23°C ± 3°C	31 % ± 5 %
2013-11-20	20°C ± 3°C	25 % ± 5 %
2013-11-21	19°C ± 3°C	26 % ± 5 %
2013-11-27	21°C ± 3°C	33 % ± 5 %
2013-12-03	19°C ± 3°C	33 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §27.53(h). The test object was connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

A resolution bandwidth of 20 kHz was used up to 1 MHz away from the band edges. 20 kHz is <1% of the Emission BW (4.37 MHz between the 26 dB points for 5 MHz nominal BW setting). To compensate for the reduced resolution bandwidth, the limit was adjusted with 3.39 dB to -16.39 dBm.

A resolution bandwidth of 100 kHz was used 1 MHz to 6 MHz away from the band edges, to compensate for the reduced resolution bandwidth the limit was adjusted by 10 dB to -23 dBm.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method E), 3), (iii) “measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v01r02

Measurement equipment	SP number
R&S FSQ 40	504 143
RF attenuator	902 282
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Appendix 5

Results

Signal carrier

Diagram	BW configuration	Symbolic name	Tested Port
1 a-c	5 MHz	B1	RF A
2 a-c	5 MHz	T1	RF A

MIMO mode, single carrier

Diagram	BW configuration	Symbolic name	Tested Port
3 a-c	5 MHz	B1	RF A
4 a-c	5 MHz	B1	RF B
5 a-c	5 MHz	T1	RF A
6 a-c	5 MHz	T1	RF B

MIMO mode, 2-carriers

Diagram	BW configuration	Symbolic name	Tested Port
7 a-c	5 MHz	B2	RF A
8 a-c	5 MHz	T2	RF A

MIMO mode, 4-carriers

Diagram	BW configuration	Symbolic name	Tested Port
9 a-c	5 MHz	B4	RF A
10 a-c	5 MHz	T4	RF A

Limits


CFR 47 §27.53(h) and RSS-139 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm.

Complies?	Yes
-----------	-----


Appendix 5

Diagram 1 a:

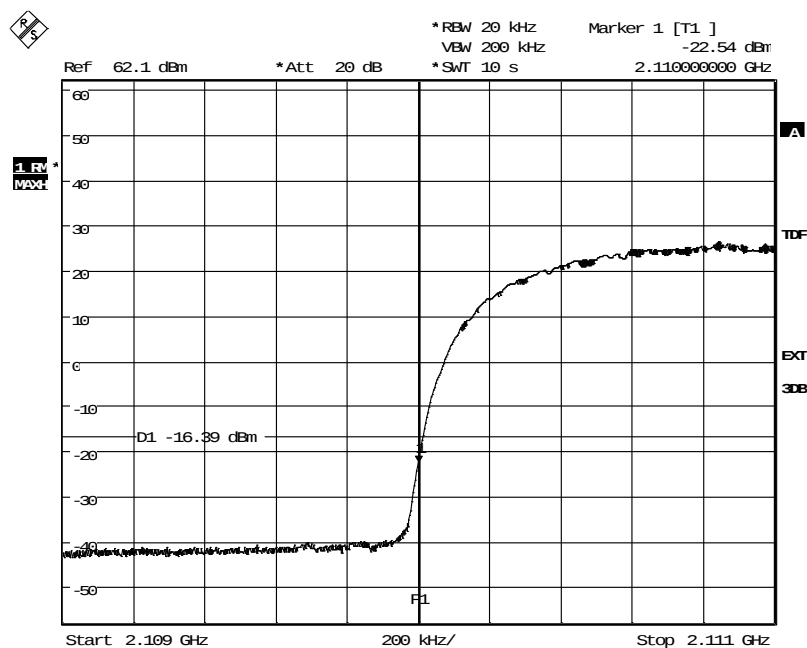

Date: 21.NOV.2013 10:17:58


Diagram 1 b:

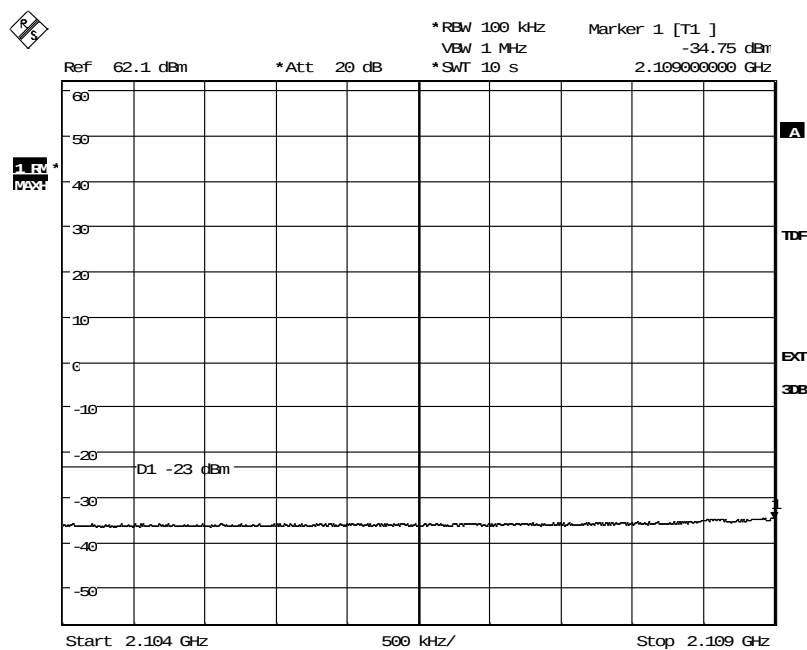

Date: 21.NOV.2013 10:19:18

Appendix 5


Diagram 1 c

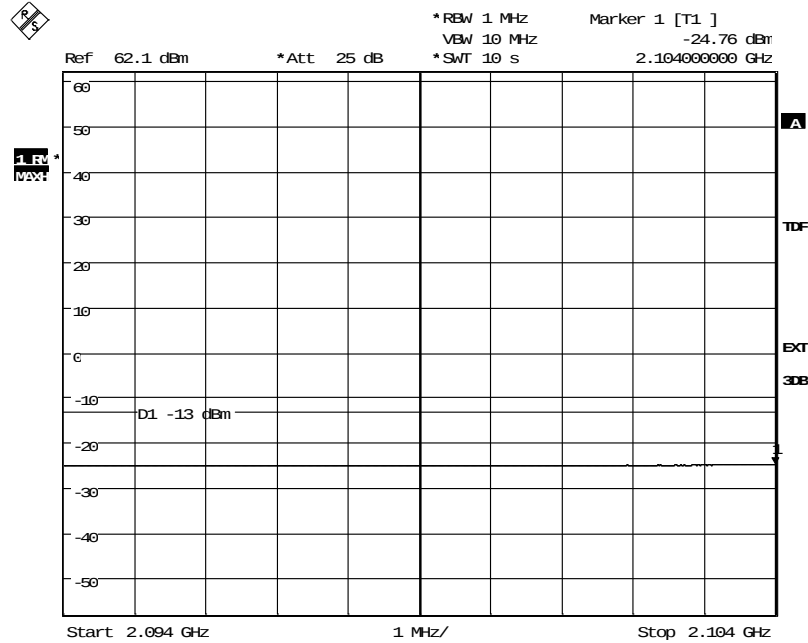

Date: 21.NOV.2013 10:20:10


Appendix 5

Diagram 2 a:

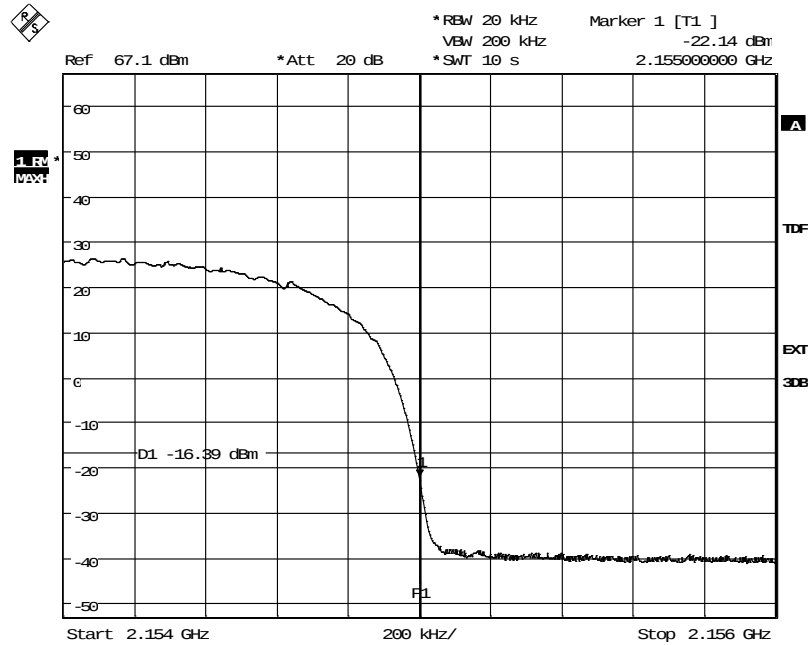

Date: 27.NOV.2013 14:43:38


Diagram 2 b:

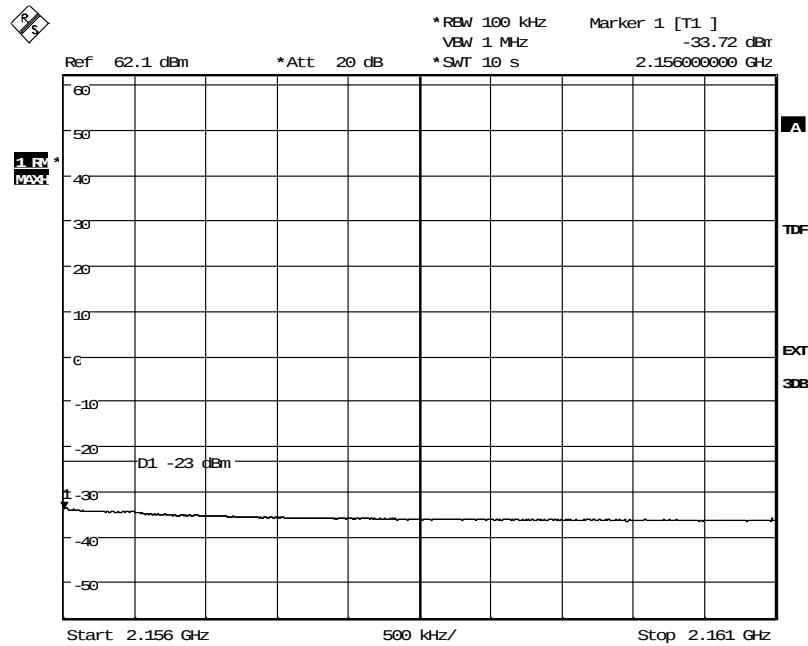

Date: 27.NOV.2013 14:45:14

Appendix 5


Diagram 2 c:

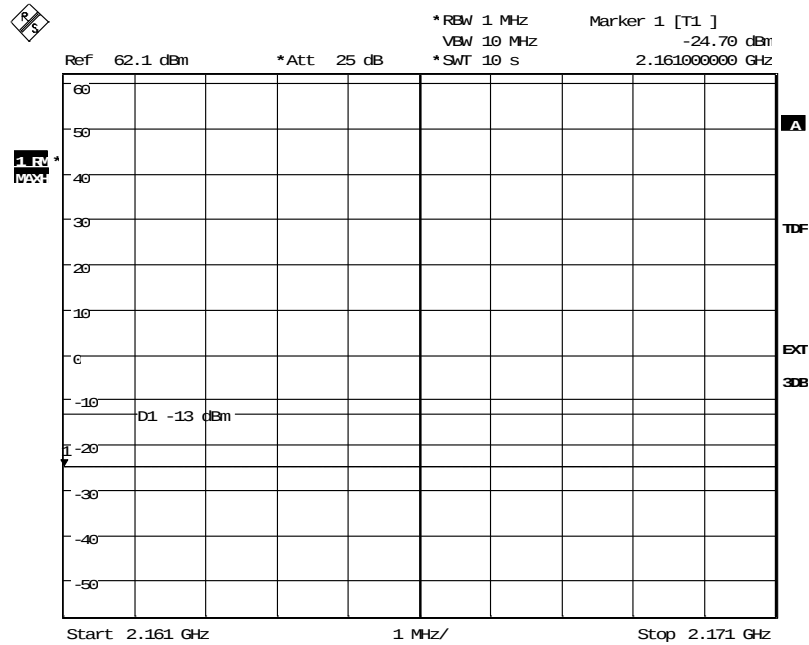

Date: 27.NOV.2013 14:46:15


Appendix 5

Diagram 3 a:

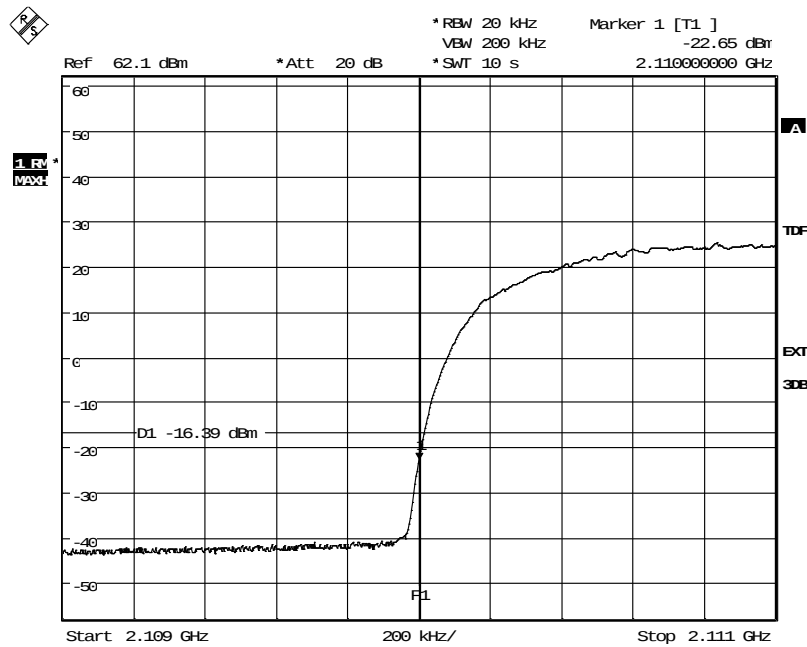

Date: 3.DEC.2013 15:50:38


Diagram 3 b:

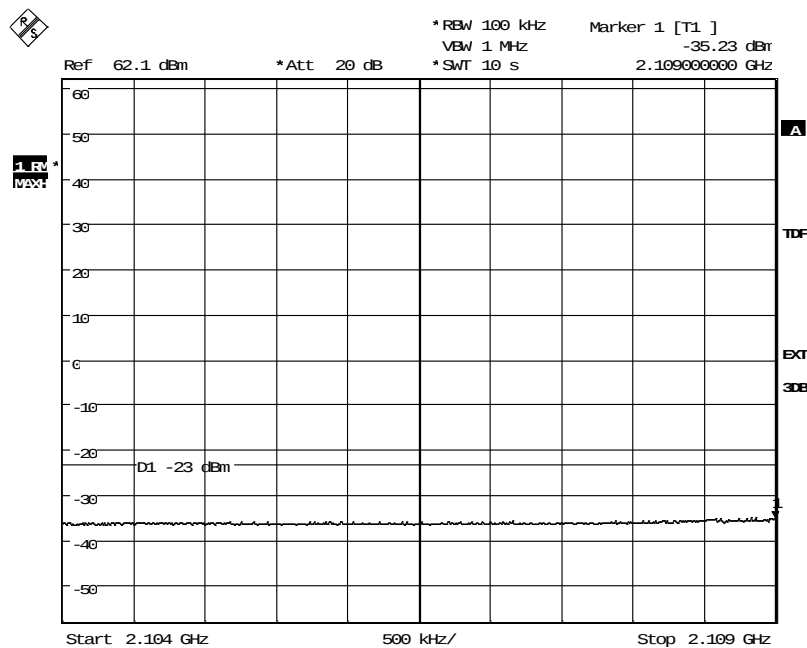

Date: 3.DEC.2013 15:52:04

Appendix 5


Diagram 3 c

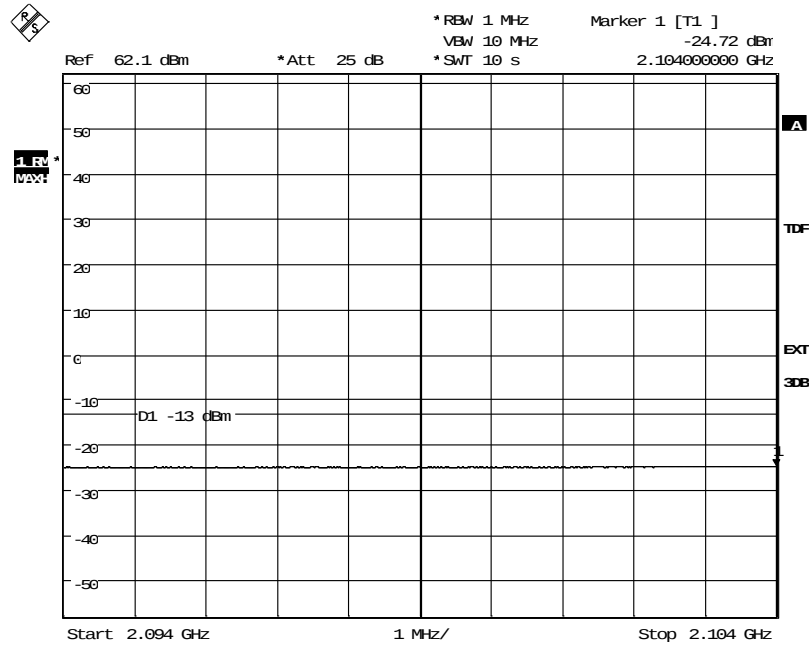

Date: 3.DEC.2013 15:54:02


Appendix 5

Diagram 4 a:

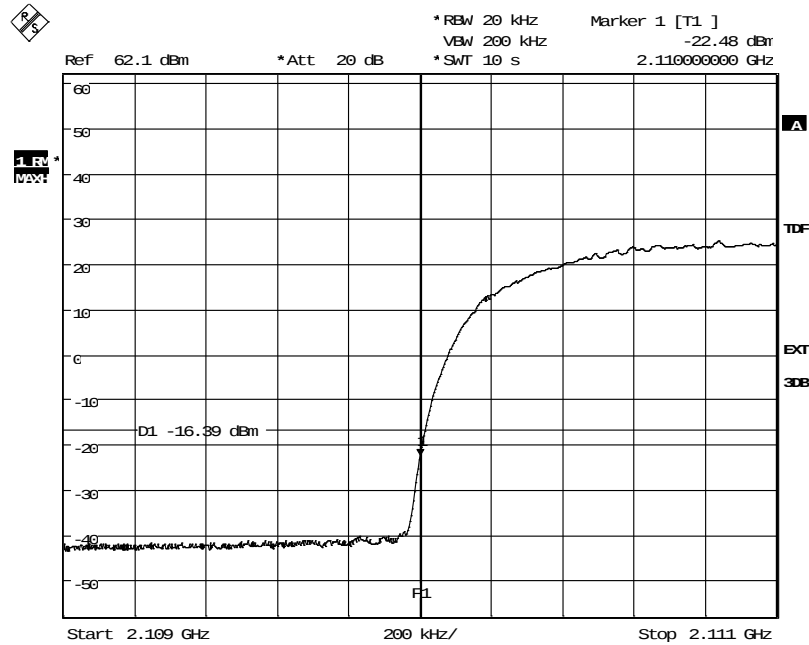

Date: 3.DEC.2013 16:34:38


Diagram 4 b:

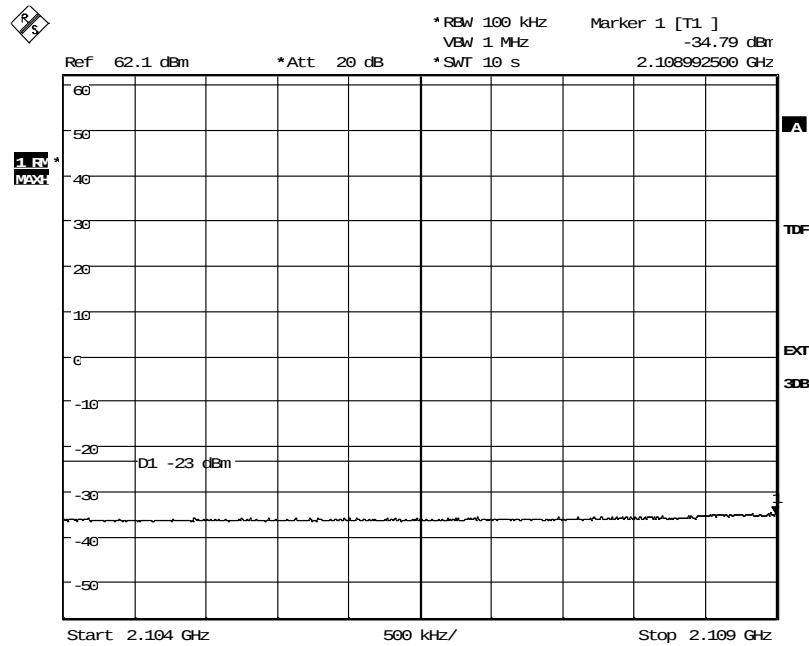

Date: 3.DEC.2013 16:35:35

Appendix 5


Diagram 4 c:

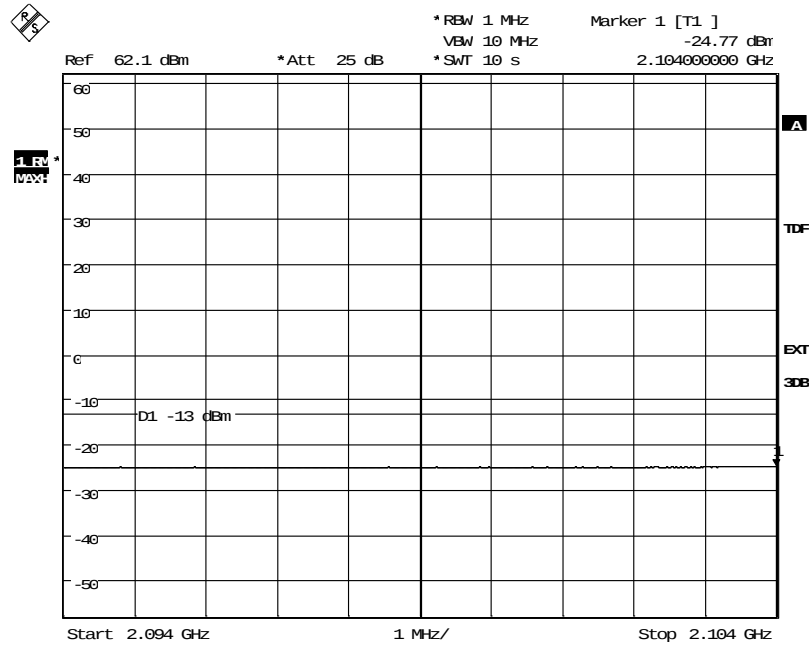

Date: 3.DEC.2013 16:36:52


Appendix 5

Diagram 5 a:

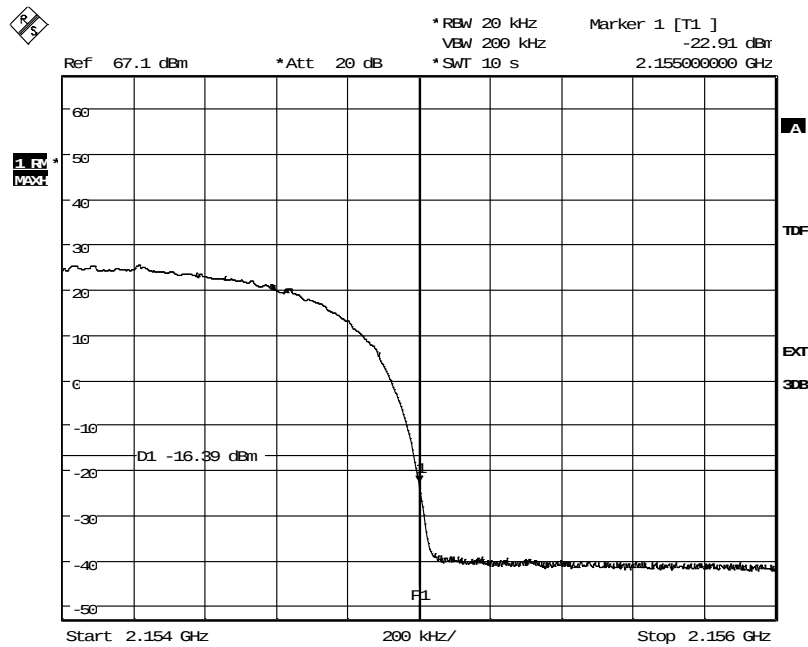

Date: 3.DEC.2013 18:11:42


Diagram 5 b:

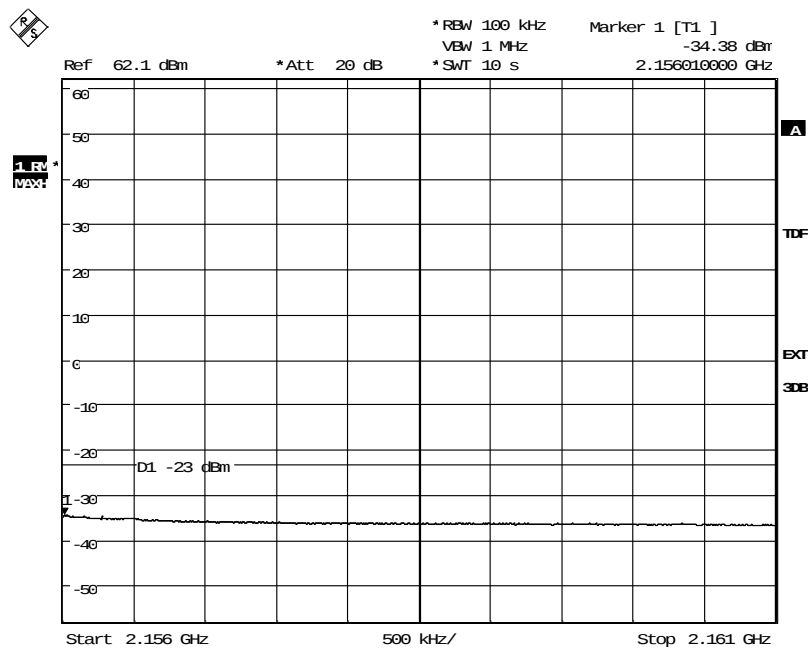

Date: 3.DEC.2013 18:12:50

Appendix 5


Diagram 5 c:

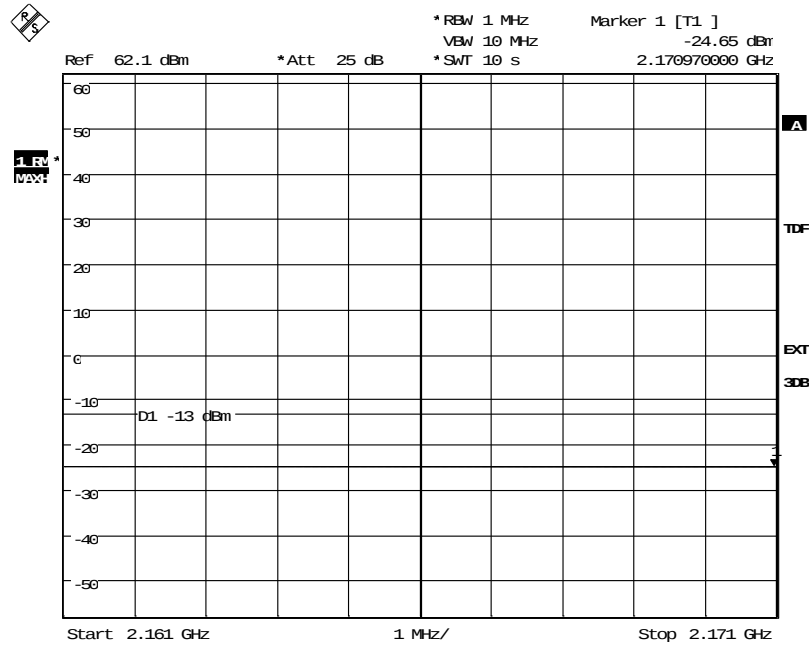

Date: 3.DEC.2013 18:13:51


Appendix 5

Diagram 6 a:

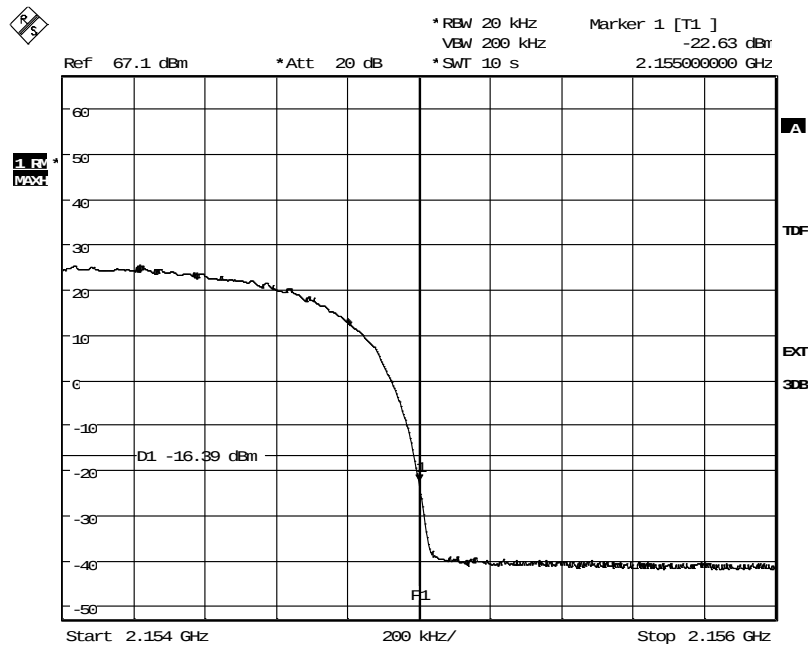

Date: 3.DEC.2013 18:24:38


Diagram 6 b:

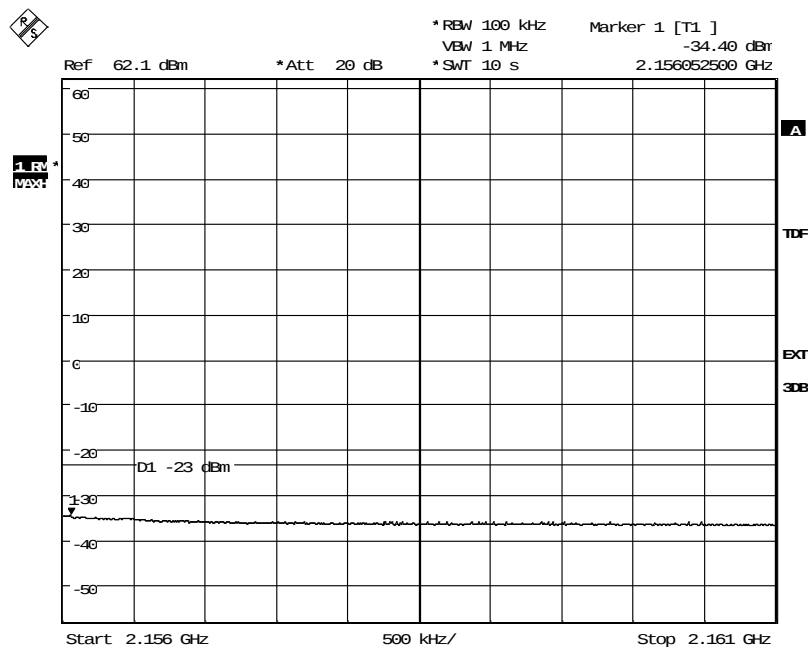

Date: 3.DEC.2013 18:25:39

Appendix 5


Diagram 6 c:

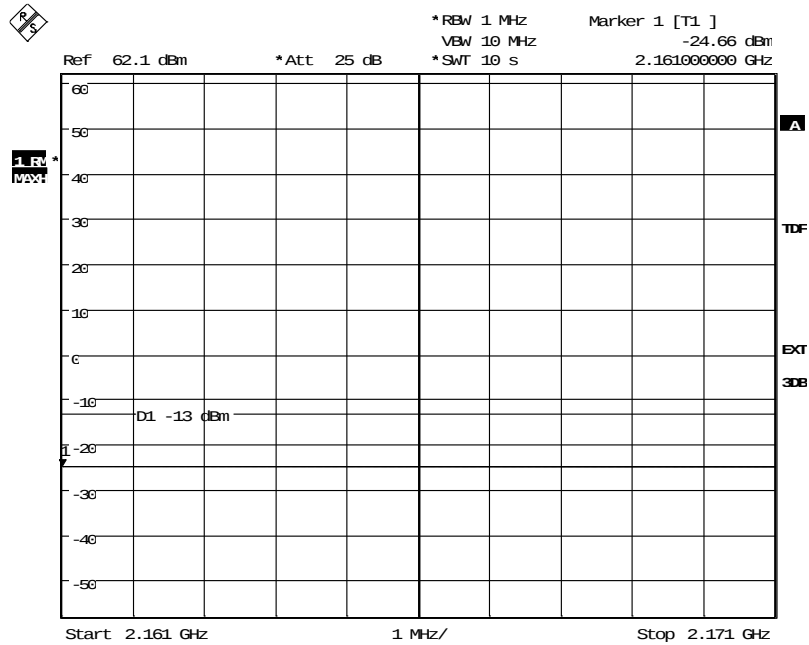

Date: 3.DEC.2013 18:26:29


Appendix 5

Diagram 7 a:

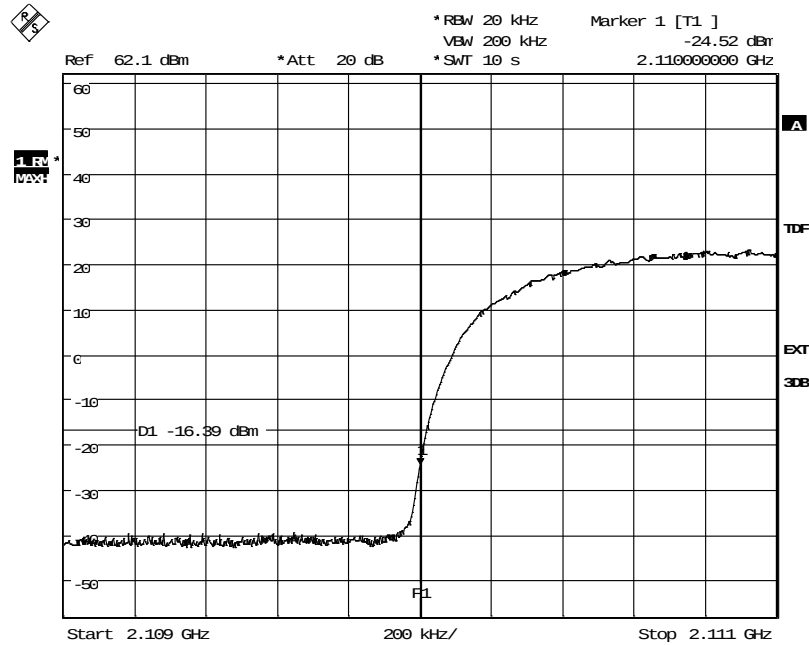

Date: 19.NOV.2013 16:48:43


Diagram 7 b:

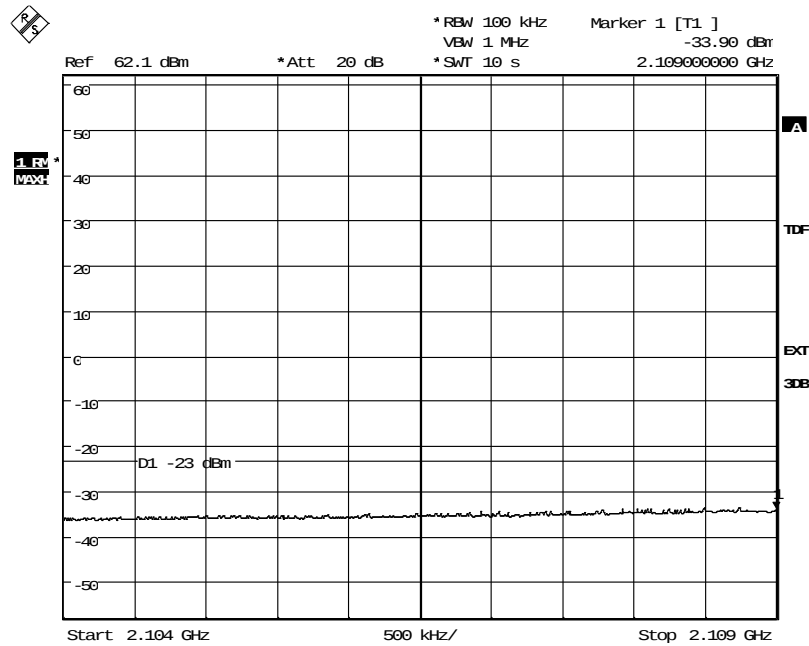

Date: 19.NOV.2013 16:49:42

Appendix 5


Diagram 7 c:

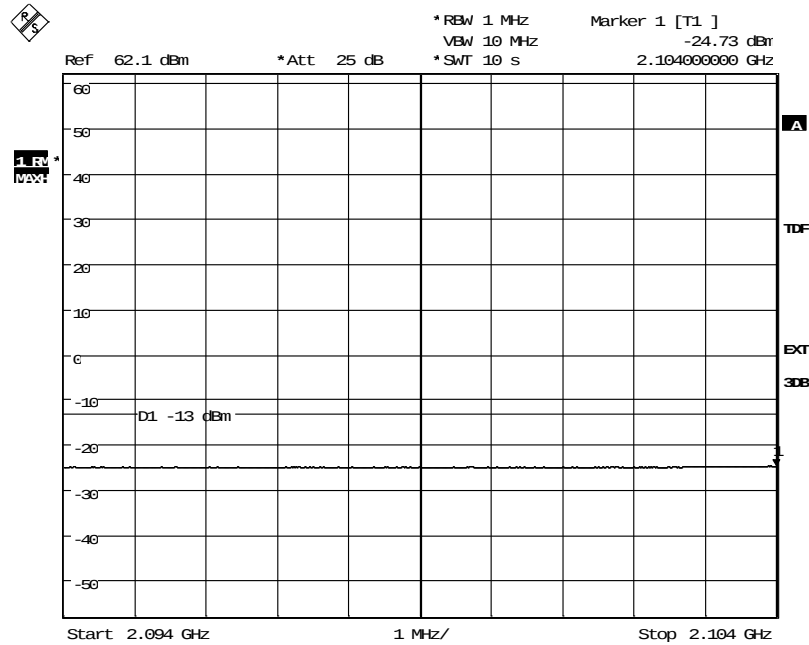

Date: 19.NOV.2013 16:51:31


Appendix 5

Diagram 8 a:

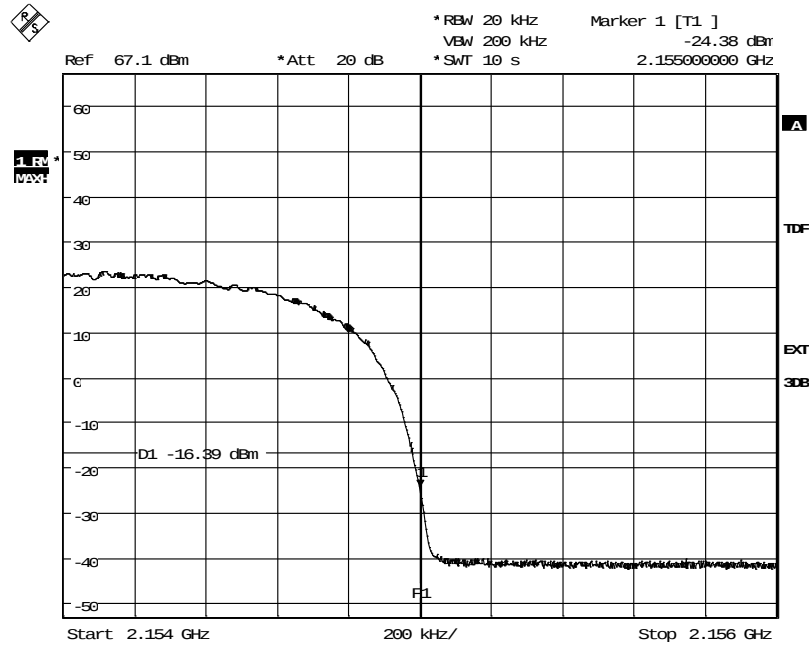

Date: 20.NOV.2013 09:14:09


Diagram 8 b:

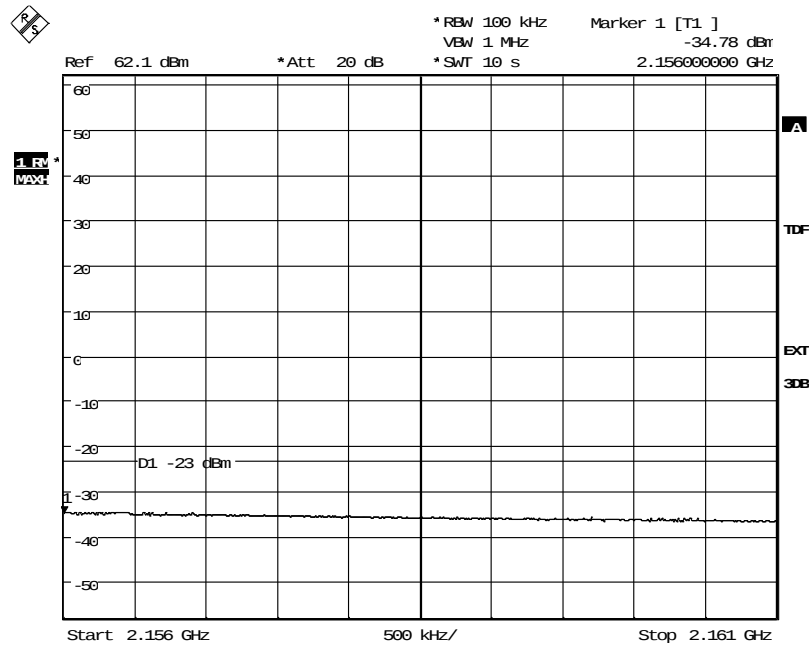

Date: 20.NOV.2013 09:15:09

Appendix 5


Diagram 8 c:

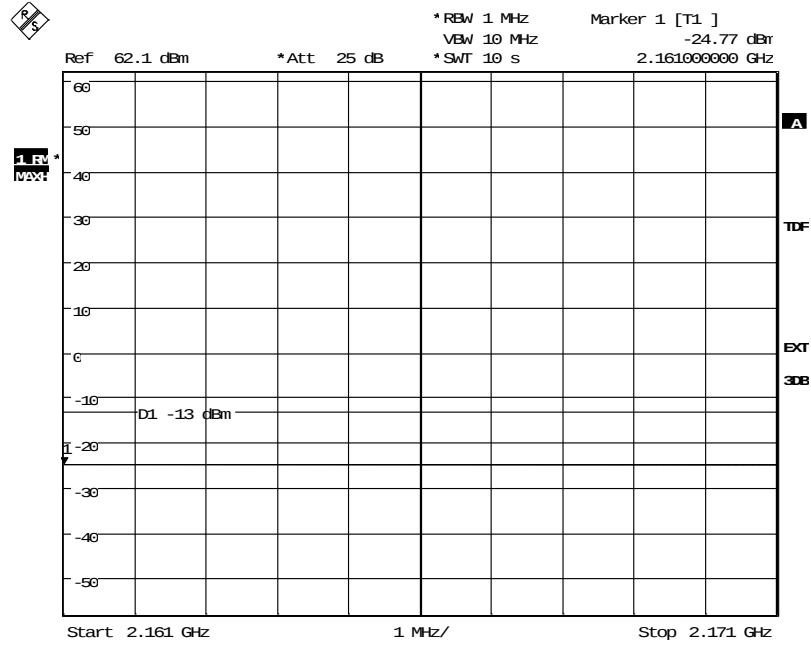

Date: 20.NOV.2013 09:18:58


Appendix 5

Diagram 9 a:

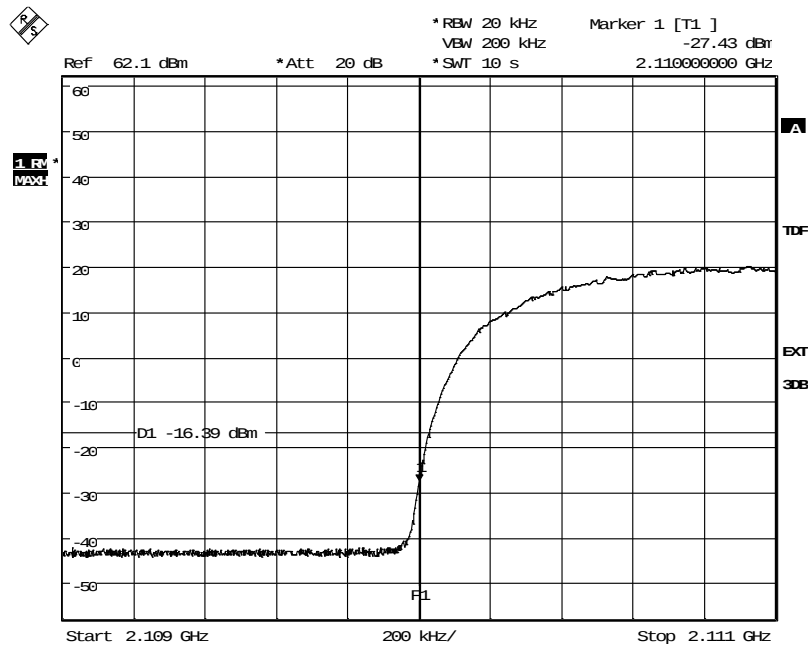

Date: 20.NOV.2013 15:27:05


Diagram 9 b:

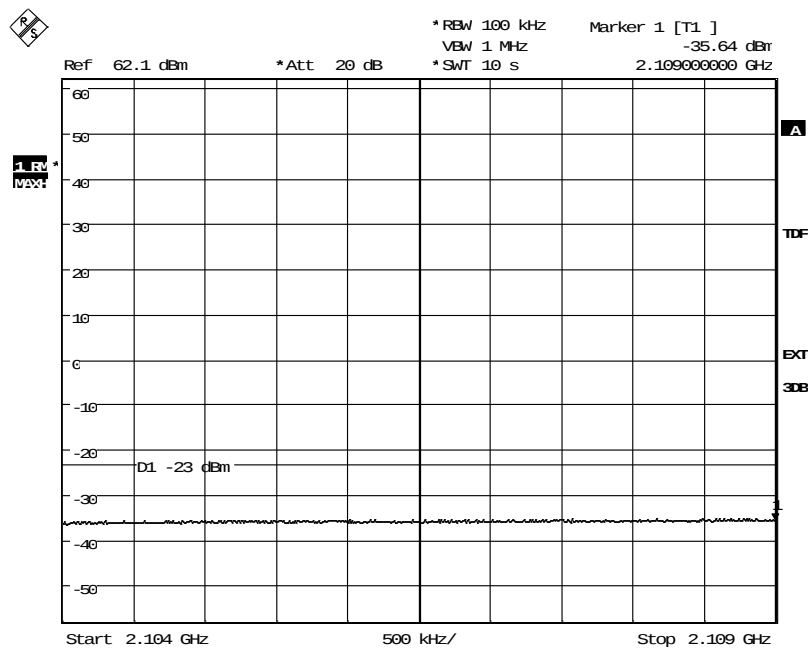

Date: 20.NOV.2013 15:28:15

Appendix 5


Diagram 9 c

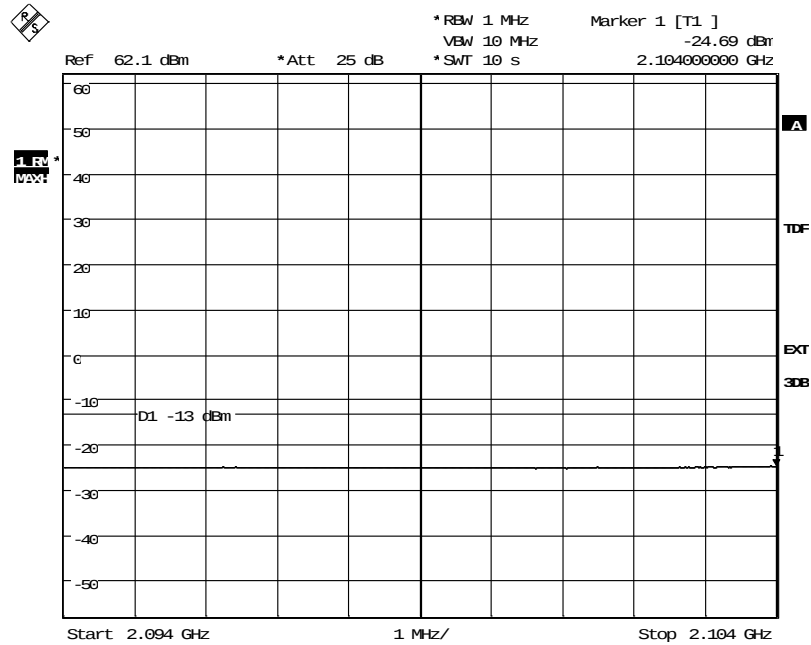

Date: 20.NOV.2013 15:29:01


Appendix 5

Diagram 10 a:

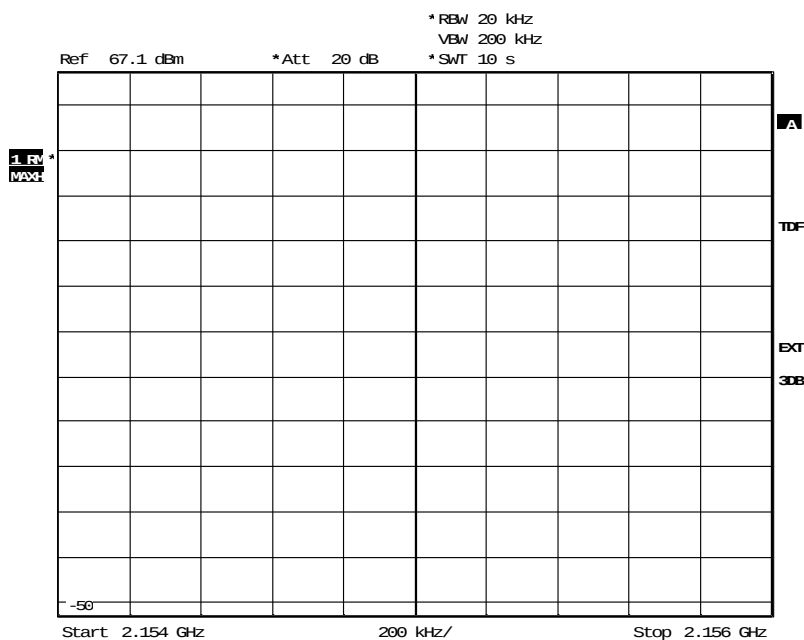

Date: 20.NOV.2013 16:24:02


Diagram 10 b:

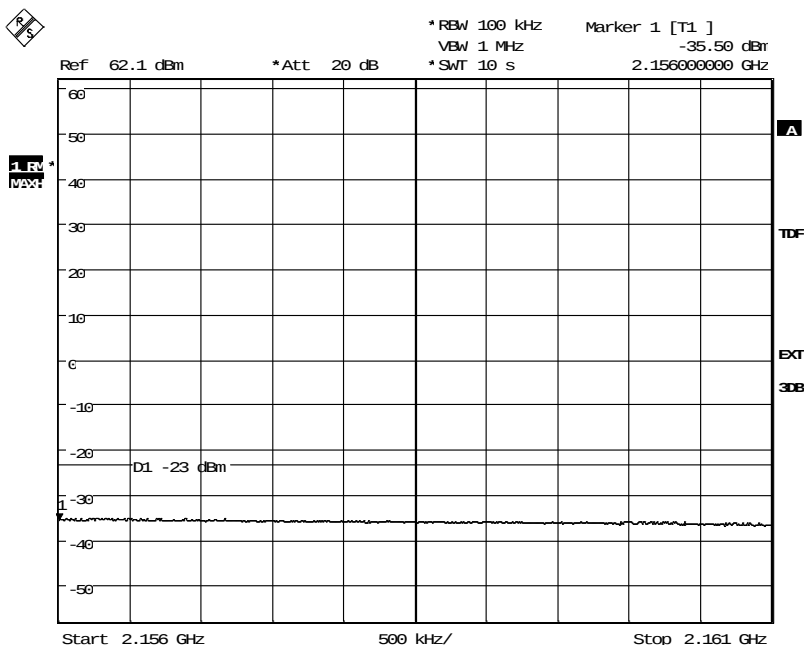

Date: 20.NOV.2013 16:39:12

Appendix 5

Diagram 10 c

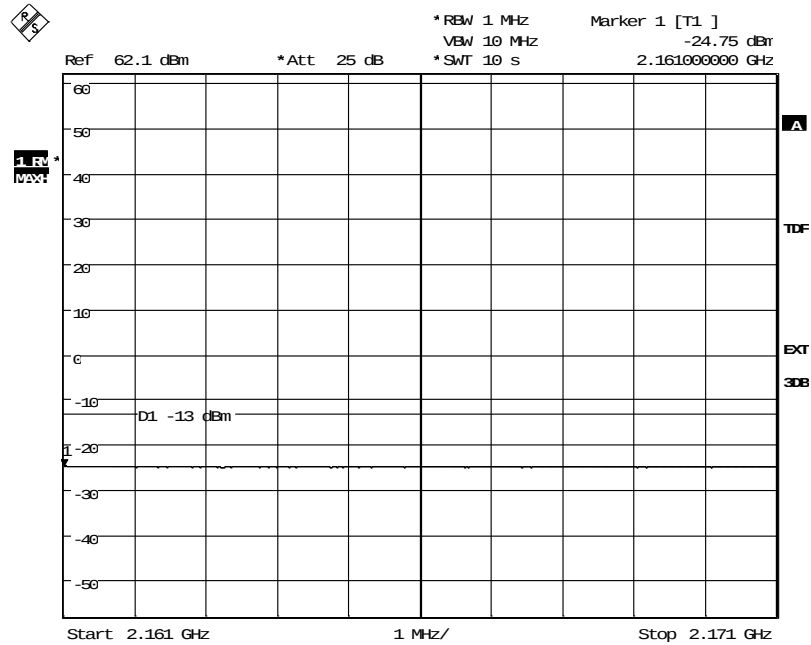

Date: 20.NOV.2013 16:32:36

Appendix 6

Conducted spurious emission measurements according to CFR 47 §27.53(h)/ IC RSS-139 6.5

Date	Temperature	Humidity
2013-11-19	23°C ± 3°C	31 % ± 5 %
2013-11-20	20°C ± 3°C	25 % ± 5 %
2013-11-21	19°C ± 3°C	26 % ± 5 %
2013-11-27	21°C ± 3°C	33 % ± 5 %
2013-12-03	19°C ± 3°C	33 % ± 5 %

Test set-up and procedure

The measurements were made per definition in §27.53(h). The output was connected to a spectrum analyzer with a RBW setting of 1 MHz and RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Before comparing the results to the limit, 3 dB [10 log (2)] should be added according to method E), 3), (iii) “measure and add 10 log(N_{ANT})” of FCC KDB662911 D01 Multiple Transmitter Output v01r02

Measurement equipment	SP number
R&S FSQ 40	504 143
RF attenuator	902 282
High pass filter	901 502
Testo 635, temperature and humidity meter	504 203

Measurement uncertainty: 3.7 dB

Results

Single carrier

Diagram	Symbolic name	Tested Port
1 a+b+c+d	B1	RF A
2 a+b+c+d	M1	RF A
3 a+b+c+d	T1	RF A

MIMO mode, single carrier

Diagram	Symbolic name	Tested Port
4 a+b+c+d	B1	RF A
5 a+b+c+d	M1	RF A
6 a+b+c+d	M1	RF B
7 a+b+c+d	T1	RF A

Appendix 6

MIMO mode, 2-carriers

Diagram	Symbolic name	Tested Port
8 a+b+c+d	B2	RF A
9 a+b+c+d	M2	RF A
10 a+b+c+d	T2	RF A

MIMO mode, 4-carriers

Diagram	Symbolic name	Tested Port
11 a+b+c+d	M4	RF A

Remark

The emission at 9 kHz on the plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

The highest fundamental frequency is 2.155 GHz. The measurements were made up to 22 GHz (10x2.155 GHz = 21.55 GHz).

Limits


§27.53(h) and RSS-139 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----


Appendix 6

Diagram 1 a:

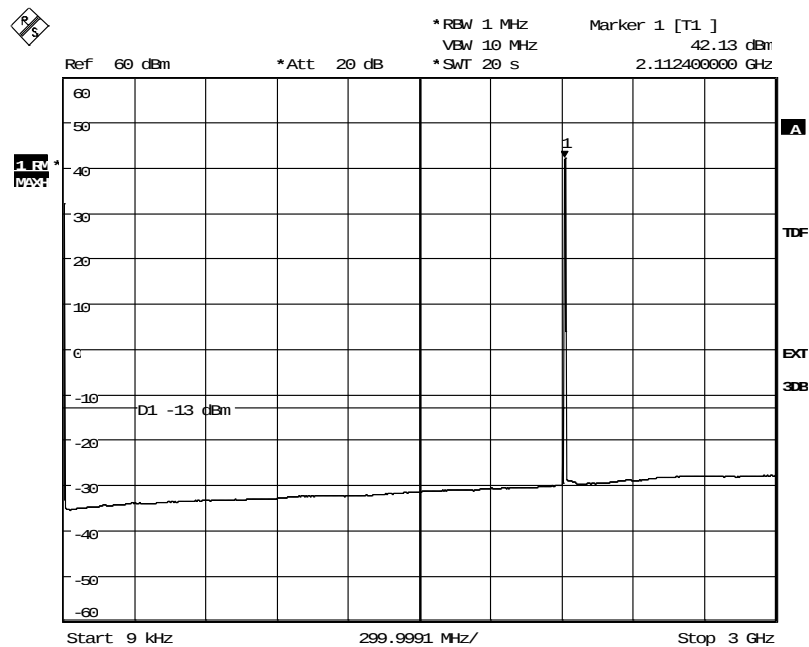

Date: 21.NOV.2013 10:21:30


Diagram 1 b:

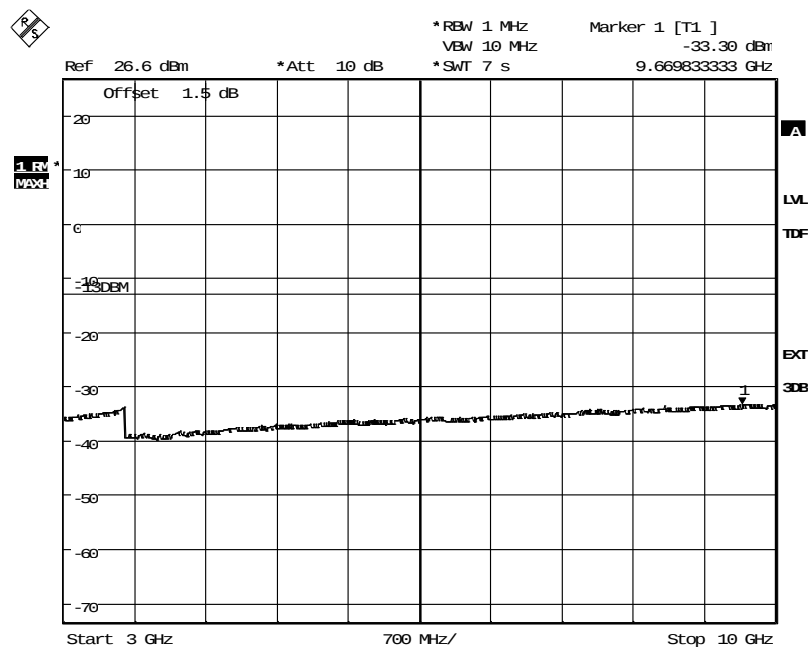

Date: 21.NOV.2013 10:28:52


Appendix 6

Diagram 1 c:

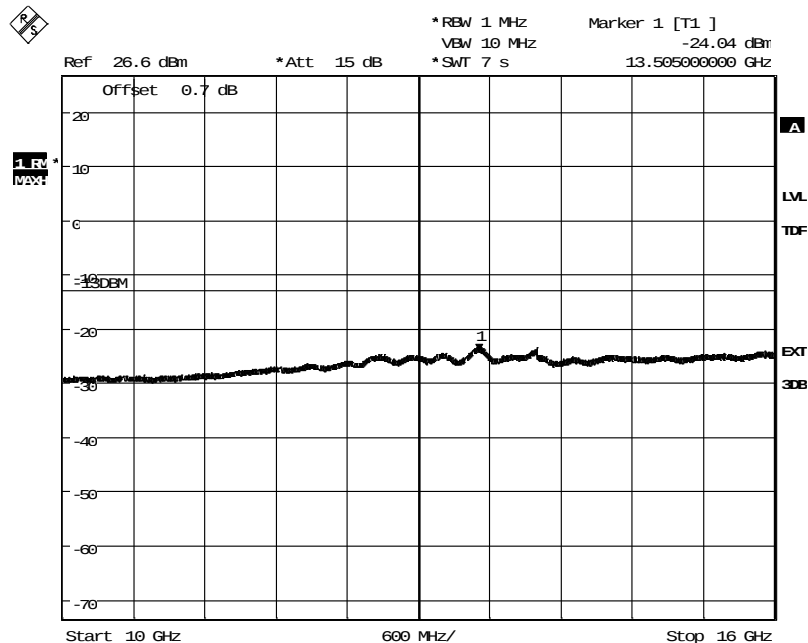

Date: 21.NOV.2013 10:29:43


Diagram 1 d:

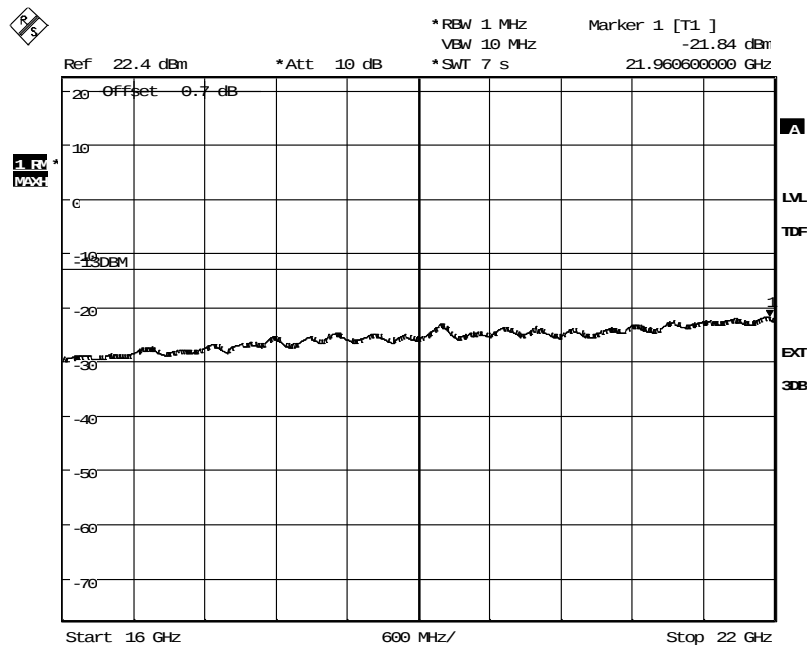

Date: 21.NOV.2013 10:31:54


Appendix 6

Diagram 2 a:

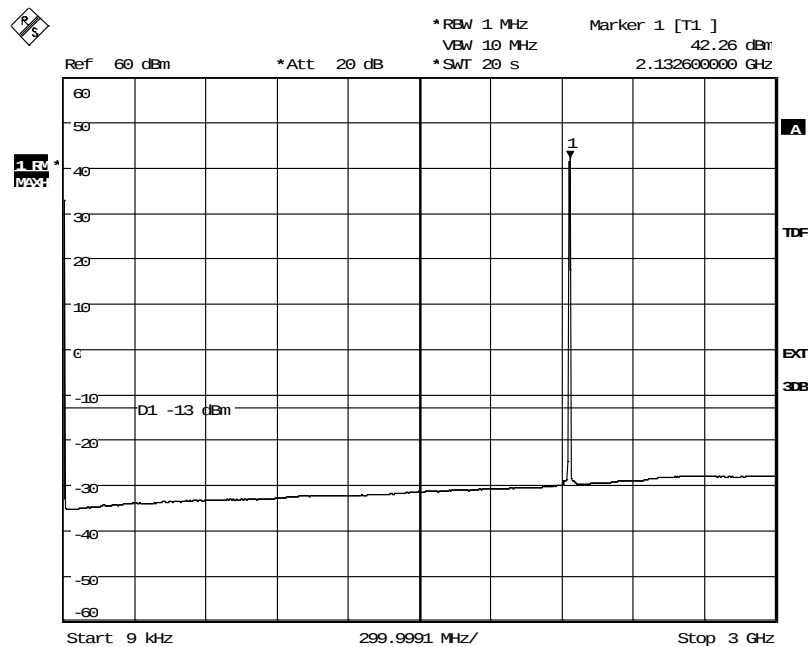

Date: 21.NOV.2013 10:49:07


Diagram 2 b:

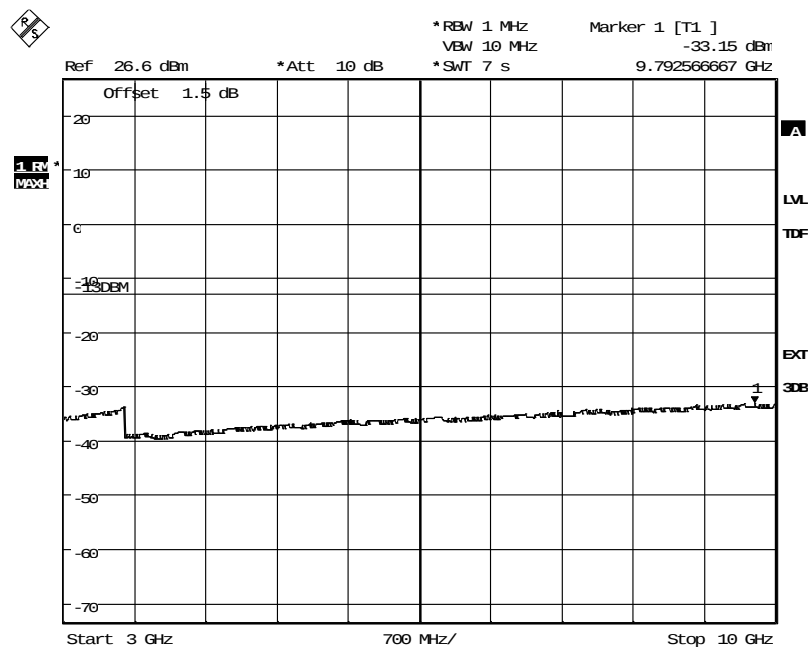

Date: 21.NOV.2013 10:45:29


Appendix 6

Diagram 2 c:

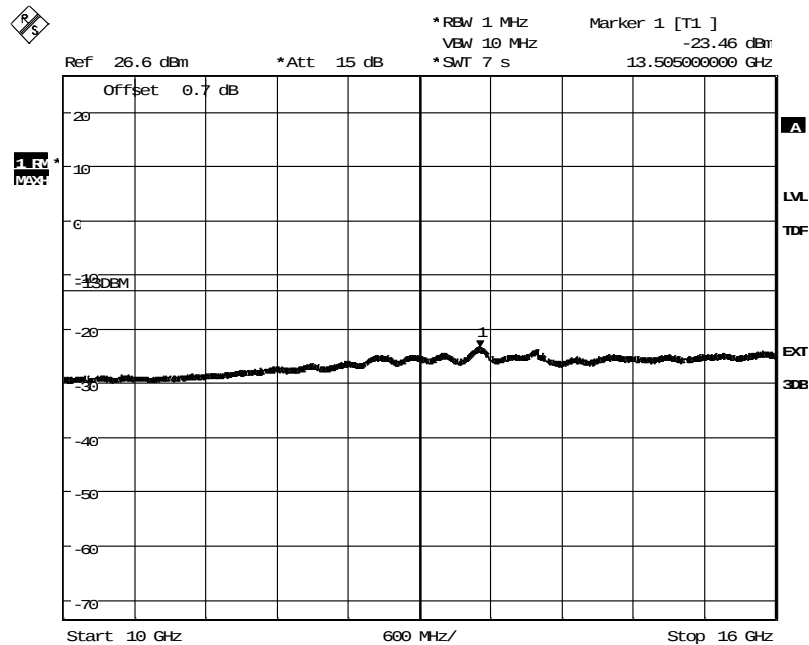

Date: 21.NOV.2013 10:42:04


Diagram 2 d:

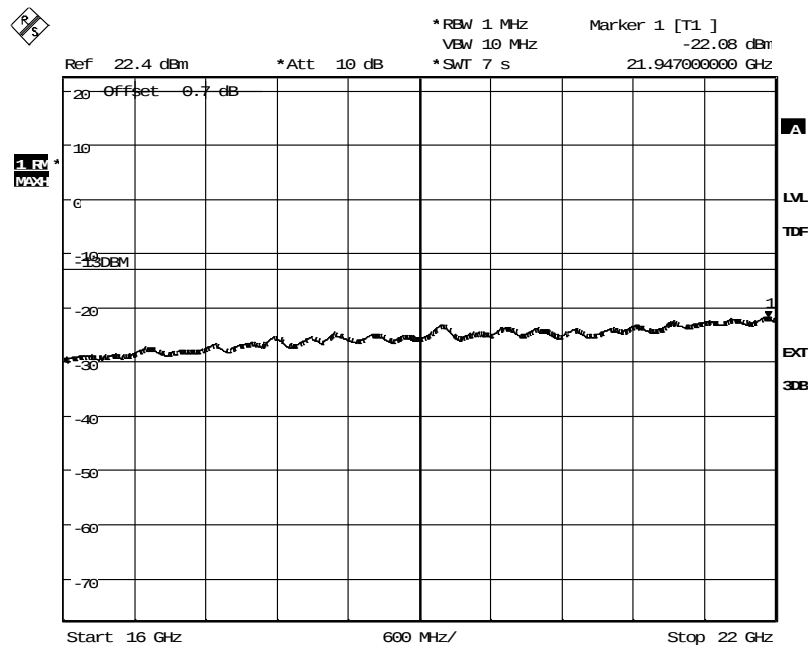

Date: 21.NOV.2013 10:40:54


Appendix 6

Diagram 3 a:

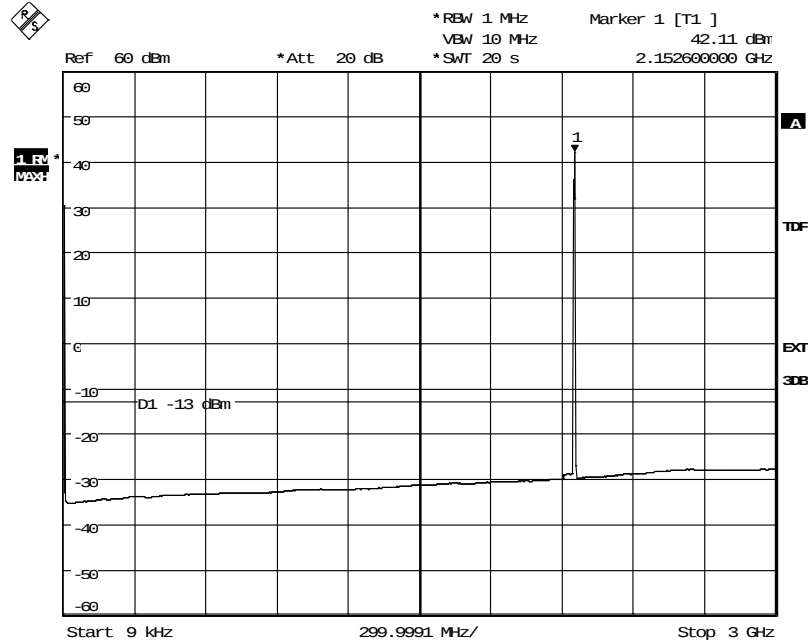

Date: 27.NOV.2013 14:47:59


Diagram 3 b:

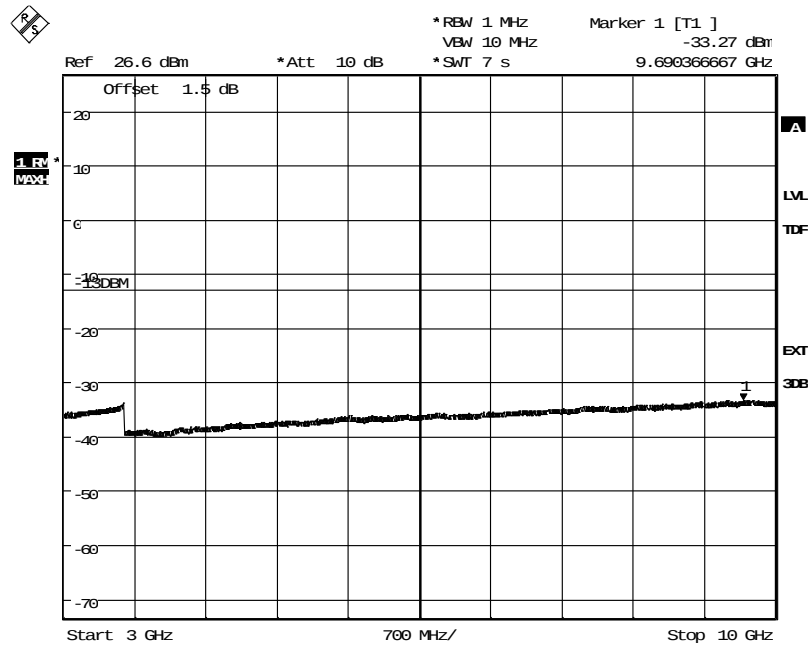

Date: 27.NOV.2013 14:56:46


Appendix 6

Diagram 3 c:

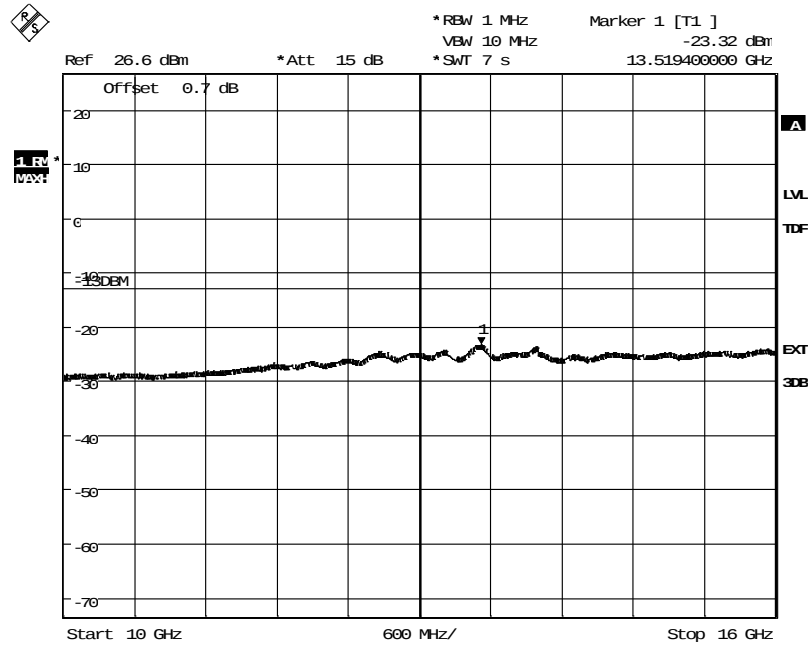

Date: 27.NOV.2013 14:58:02


Diagram 3 d:

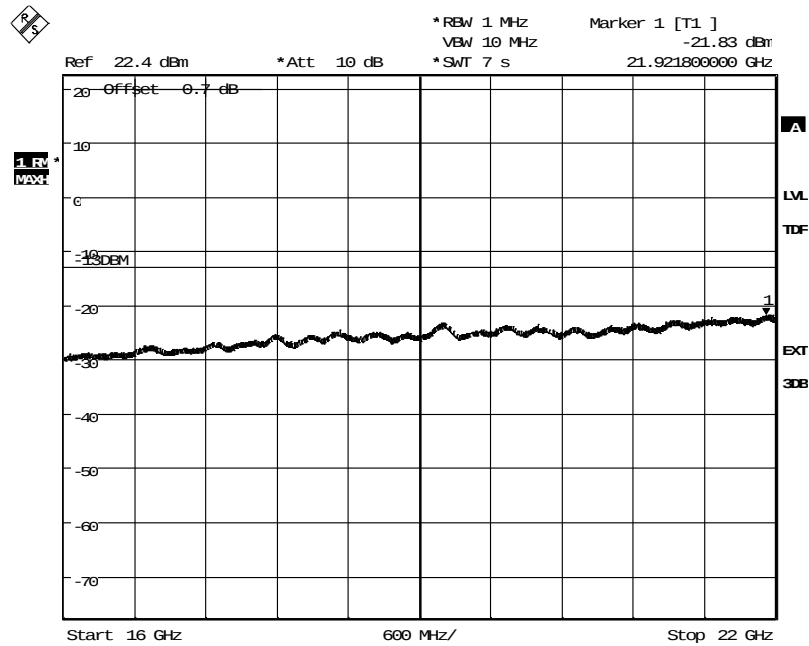

Date: 27.NOV.2013 14:59:18


Appendix 6

Diagram 4 a:

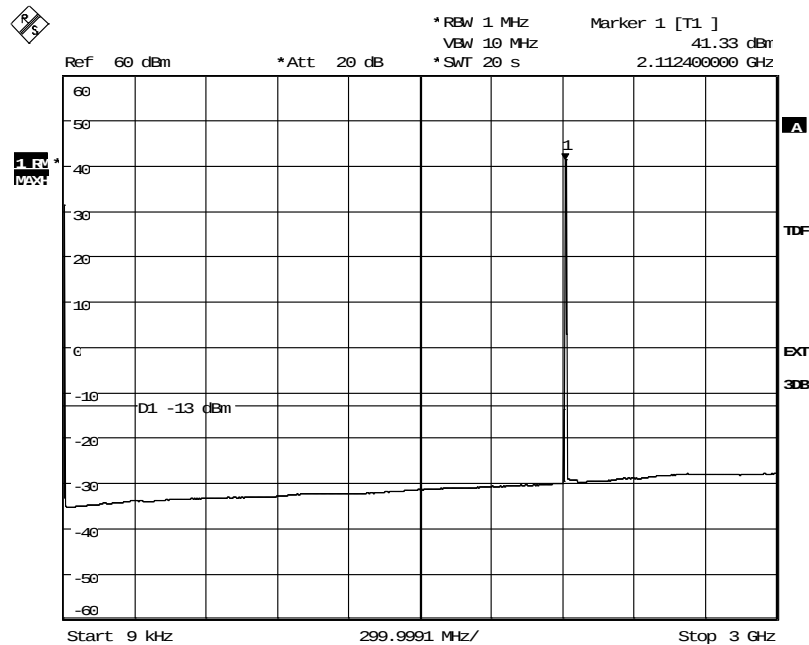

Date: 3.DEC.2013 16:19:40


Diagram 4 b:

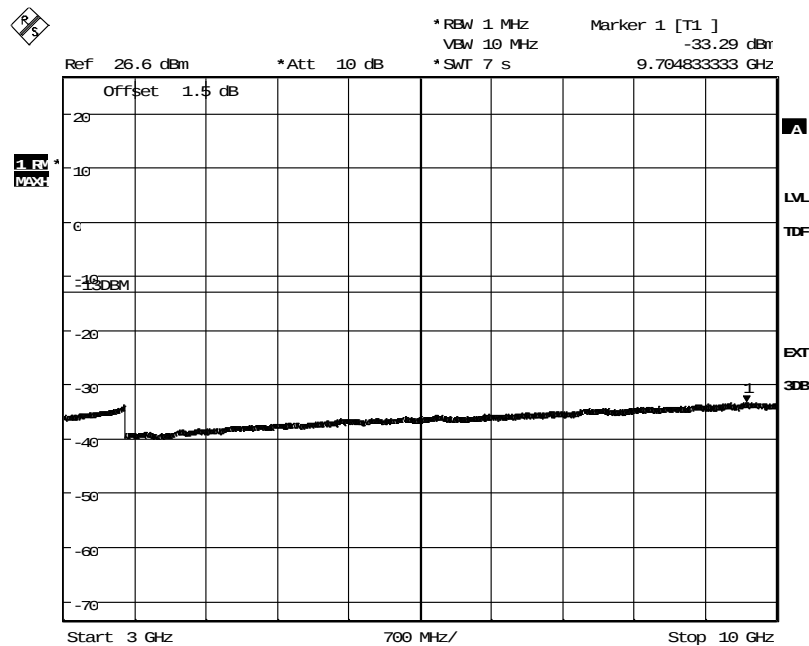

Date: 3.DEC.2013 16:21:37


Appendix 6

Diagram 4 c:

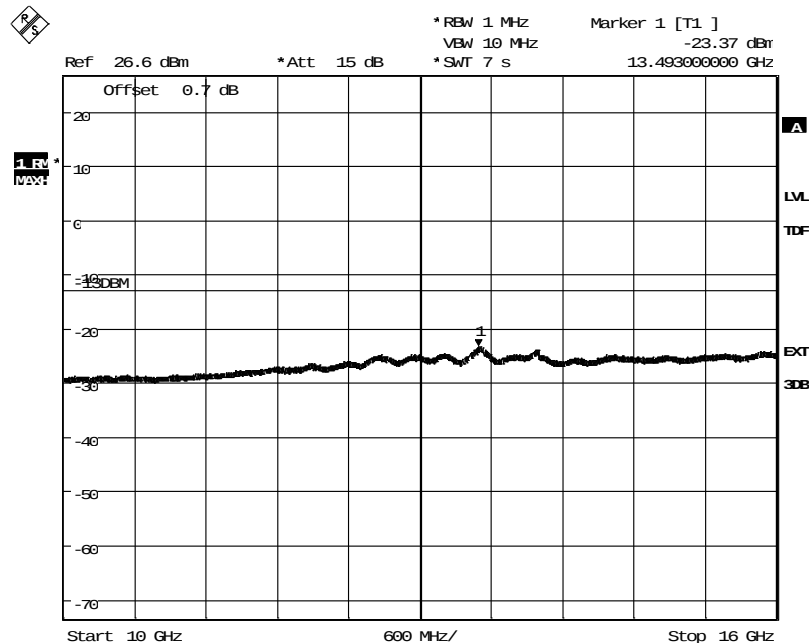

Date: 3.DEC.2013 16:22:21


Diagram 4 d:

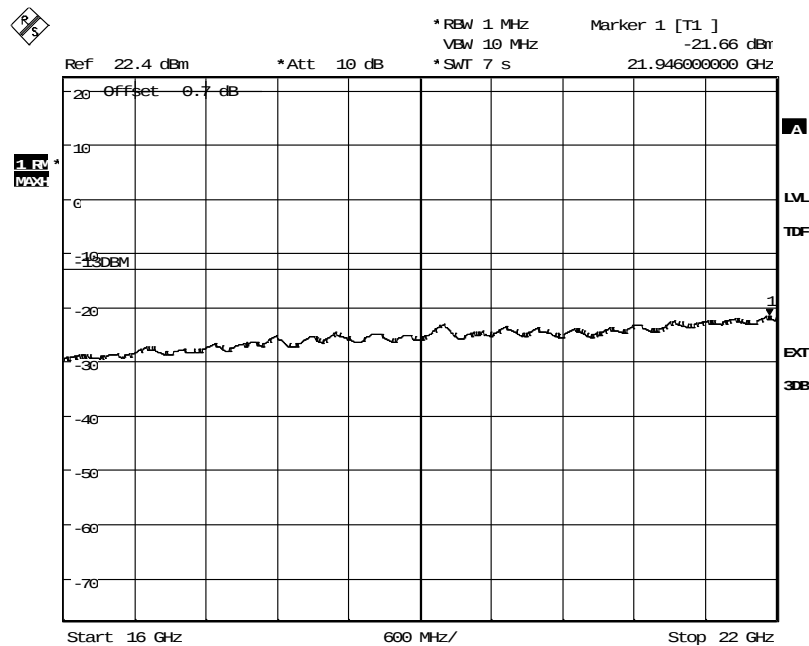

Date: 3.DEC.2013 16:27:30


Appendix 6

Diagram 5 a:

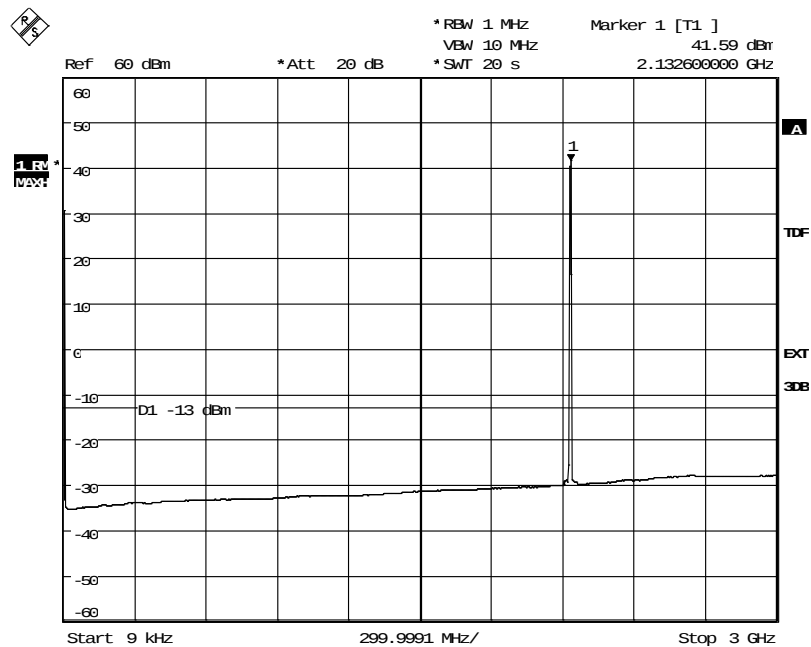

Date: 3.DEC.2013 17:57:59


Diagram 5 b:

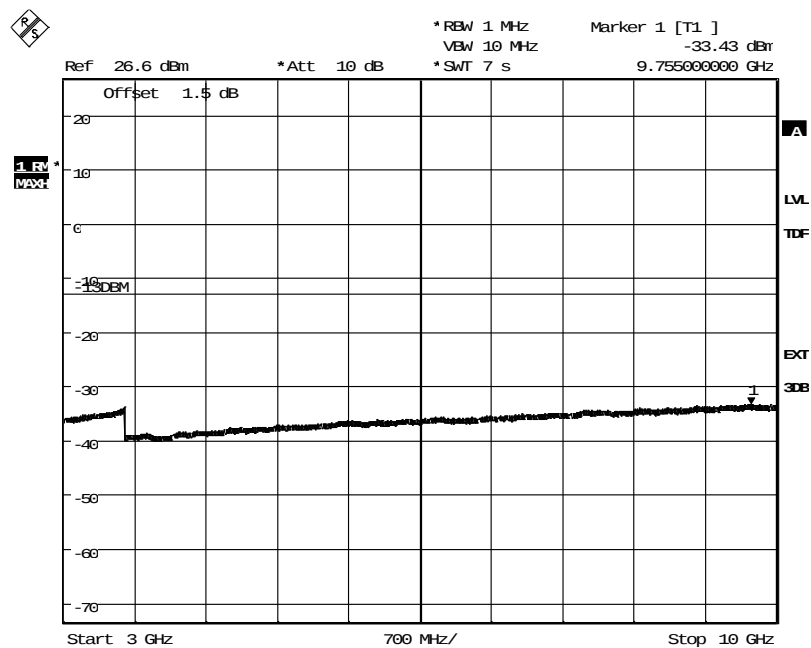

Date: 3.DEC.2013 17:59:39


Appendix 6

Diagram 5 c:

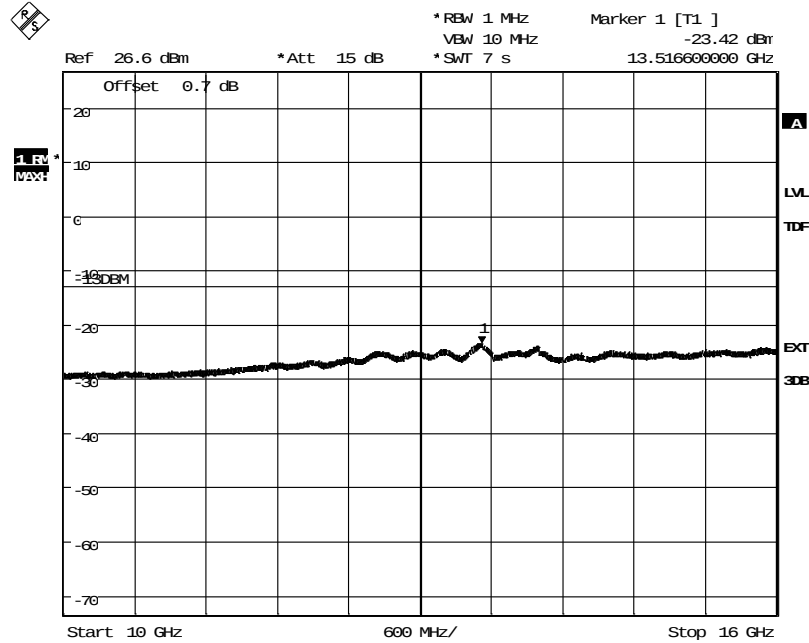

Date: 3.DEC.2013 18:00:26


Diagram 5 d:

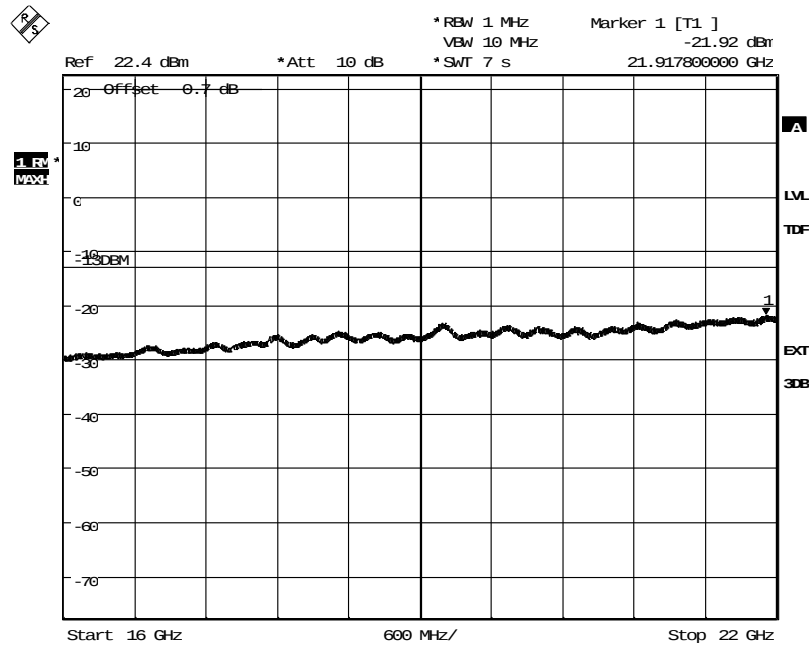

Date: 3.DEC.2013 18:01:15


Appendix 6

Diagram 6 a:

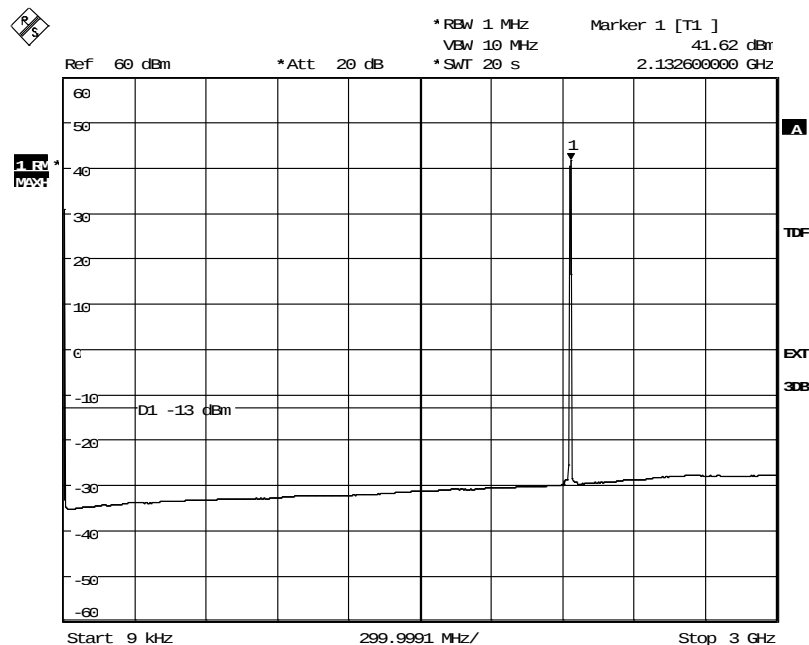

Date: 3.DEC.2013 16:53:07


Diagram 6 b:

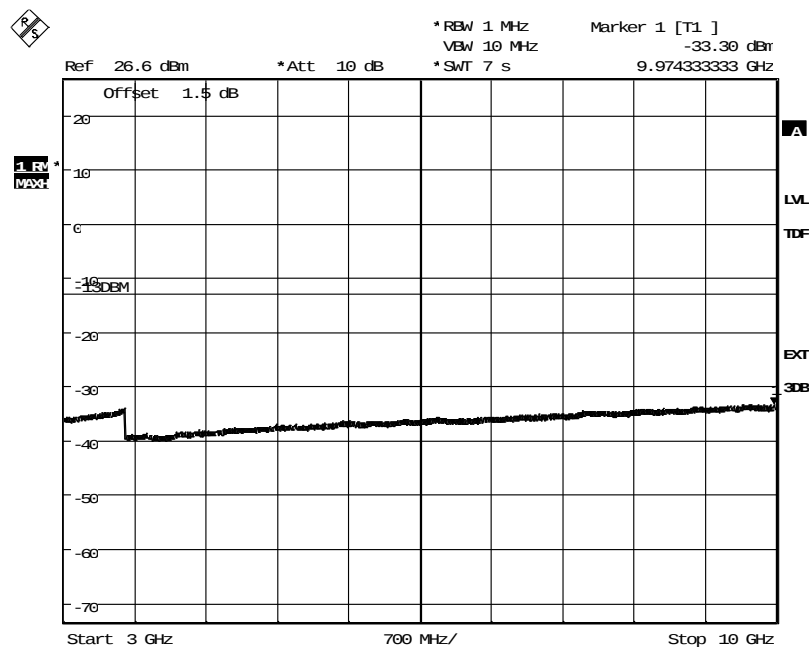

Date: 3.DEC.2013 16:54:44


Appendix 6

Diagram 6 c:

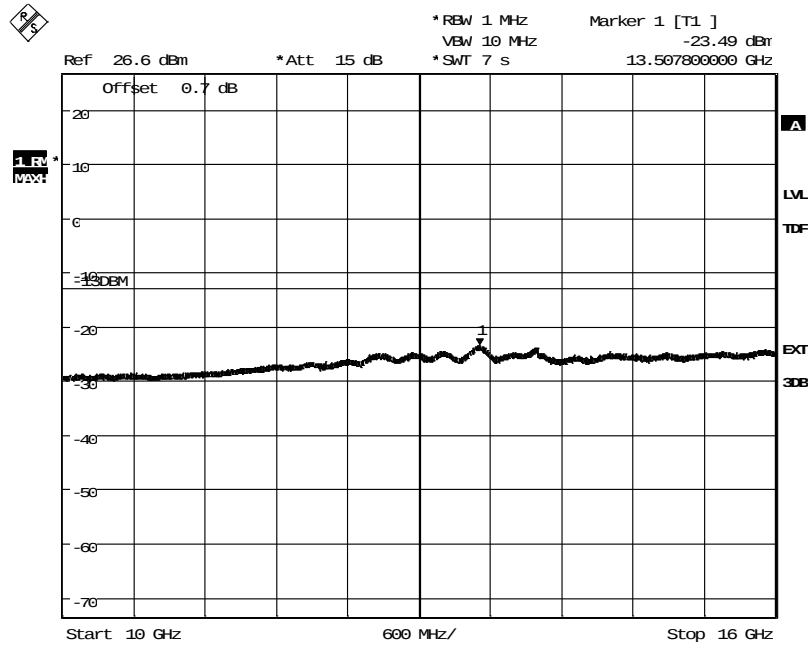

Date: 3.DEC.2013 16:55:31


Diagram 6 d:

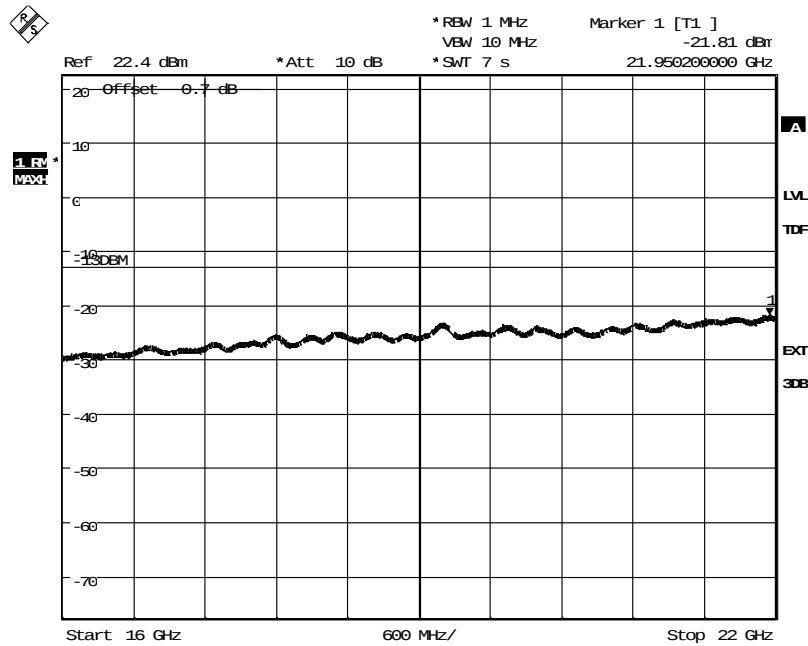

Date: 3.DEC.2013 16:56:46


Appendix 6

Diagram 7 a:

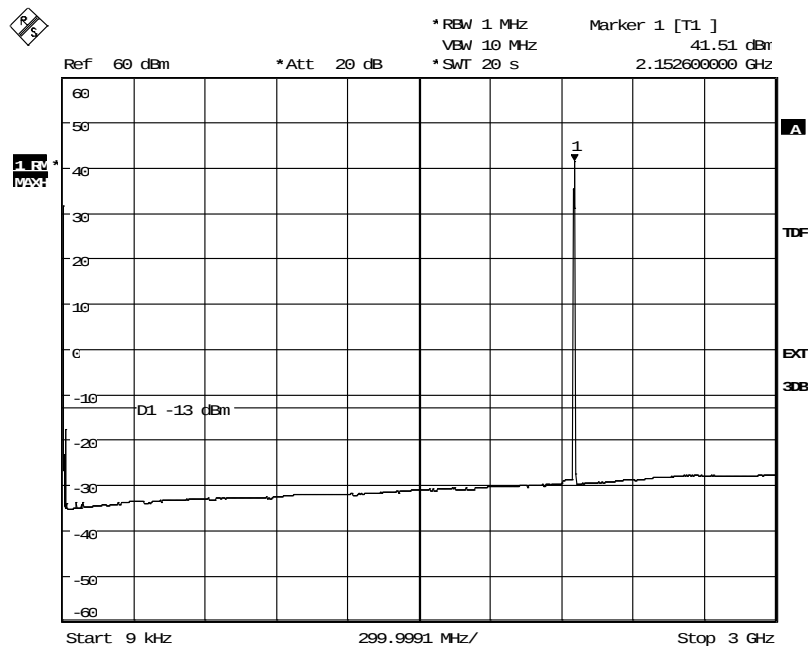

Date: 3.DEC.2013 18:09:30


Diagram 7 b:

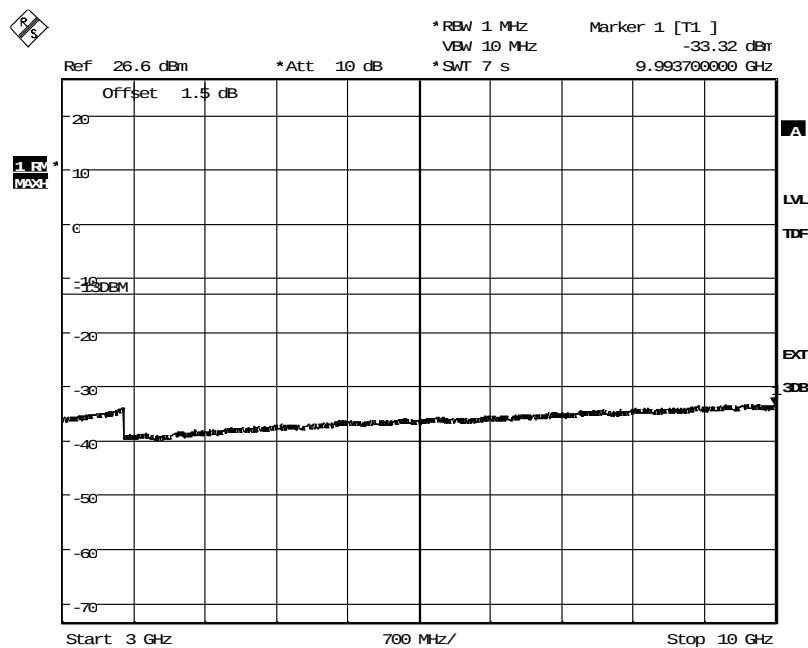

Date: 3.DEC.2013 18:07:45


Appendix 6

Diagram 7 c:

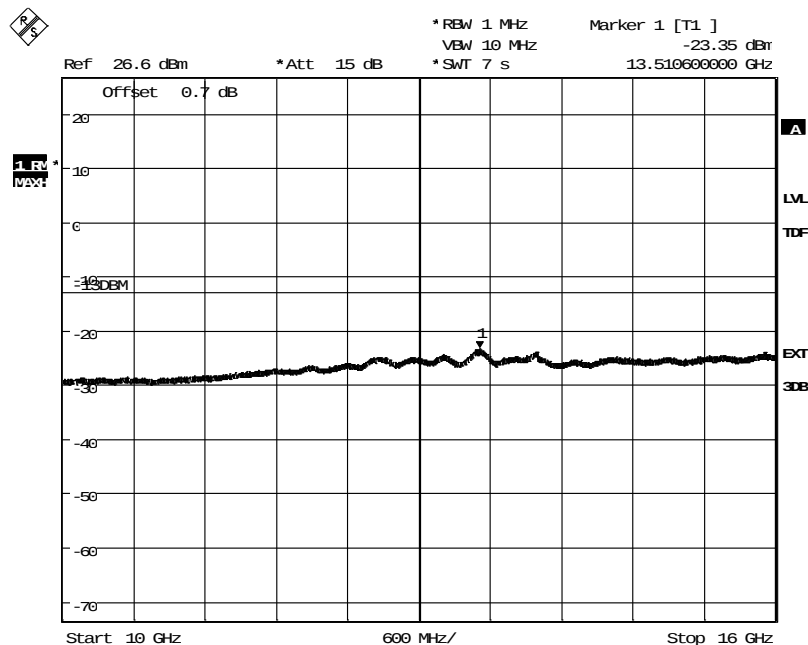

Date: 3.DEC.2013 18:06:28


Diagram 7 d:

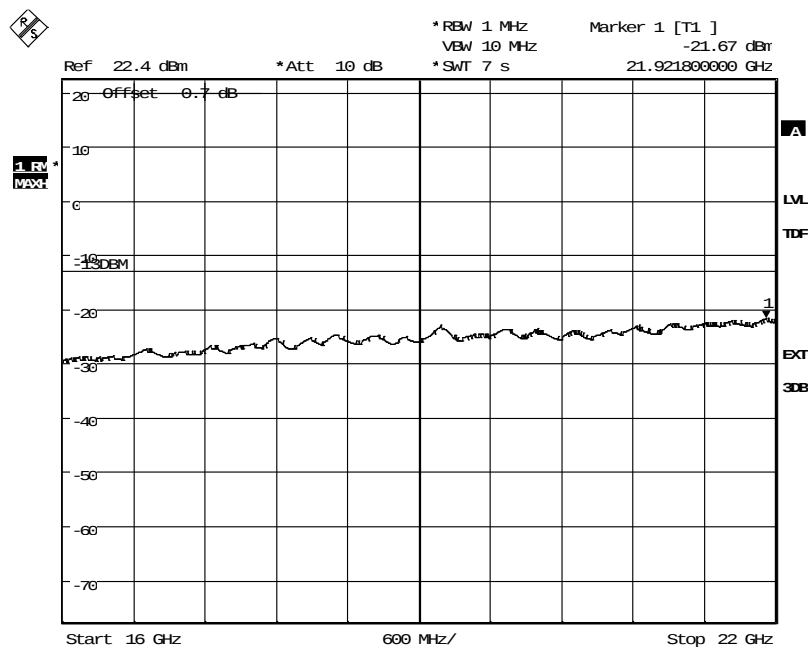

Date: 3.DEC.2013 18:05:37


Appendix 6

Diagram 8 a:

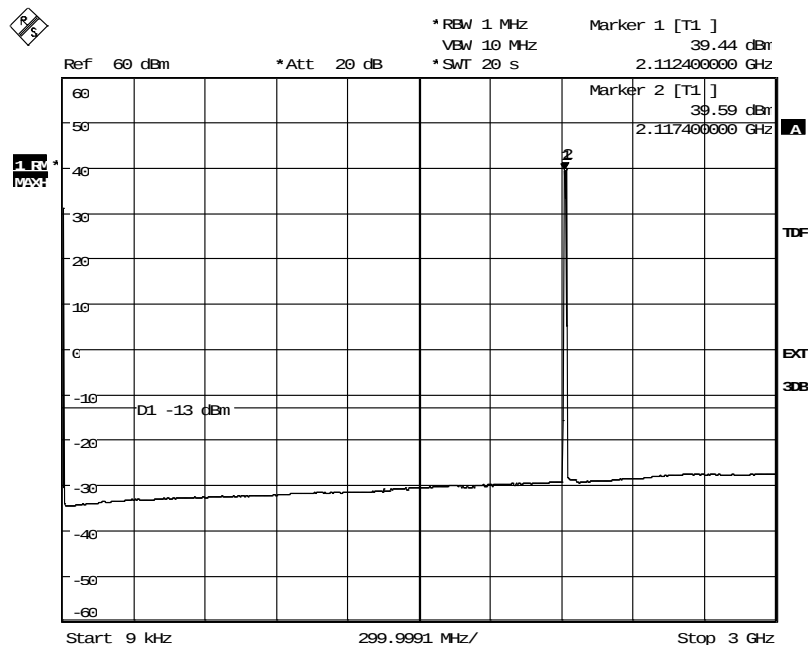

Date: 19.NOV.2013 16:57:07


Diagram 8 b:

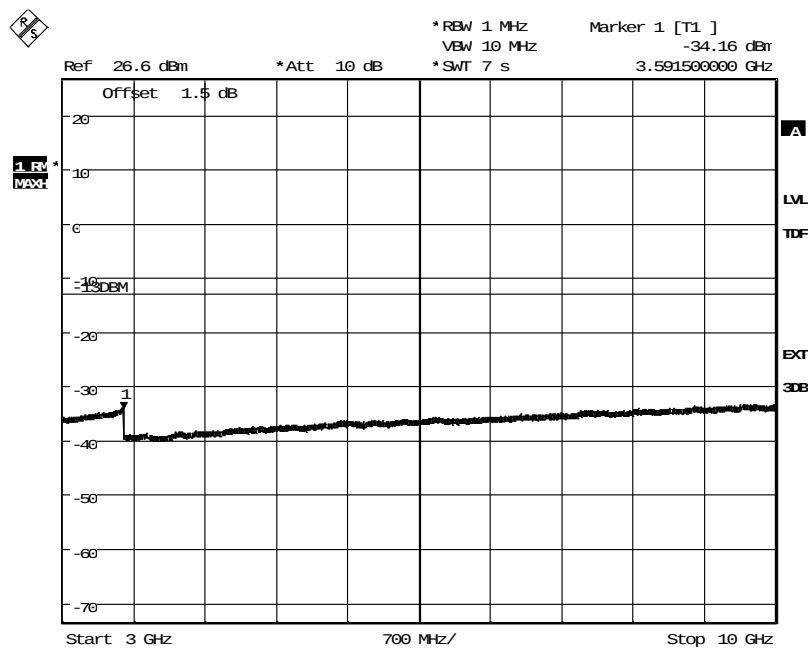

Date: 19.NOV.2013 17:12:31


Appendix 6

Diagram 8 c:

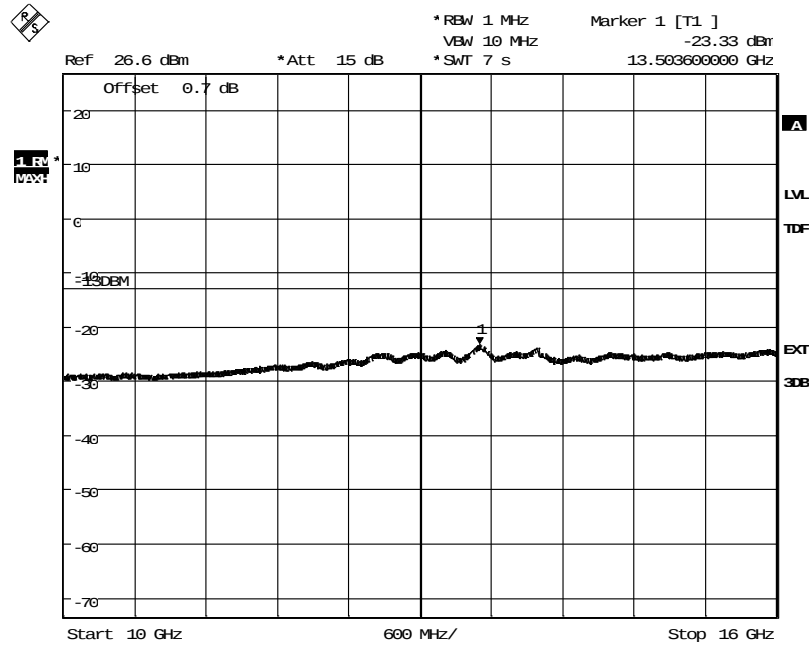

Date: 19.NOV.2013 17:13:23


Diagram 8 d:

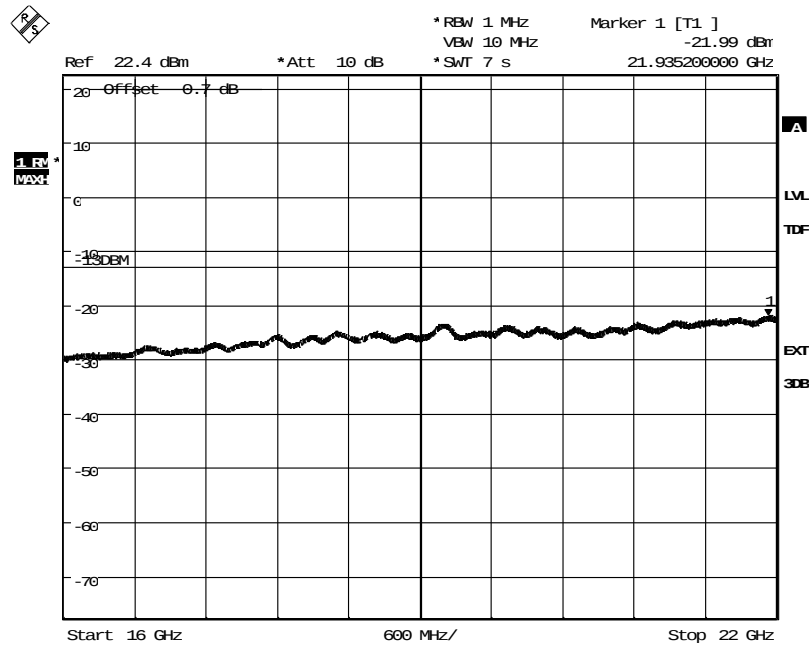

Date: 19.NOV.2013 17:14:11


Appendix 6

Diagram 9 a:

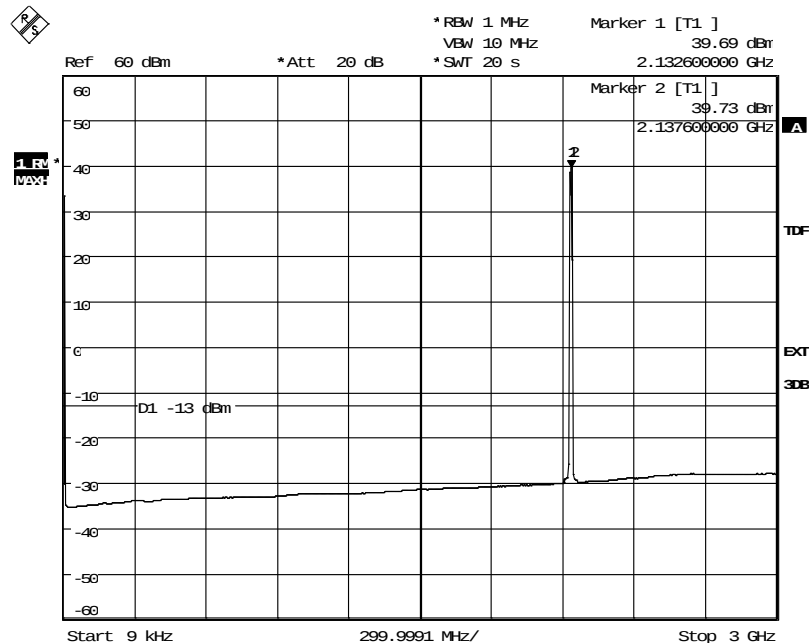

Date: 20.NOV.2013 09:02:41


Diagram 9 b:

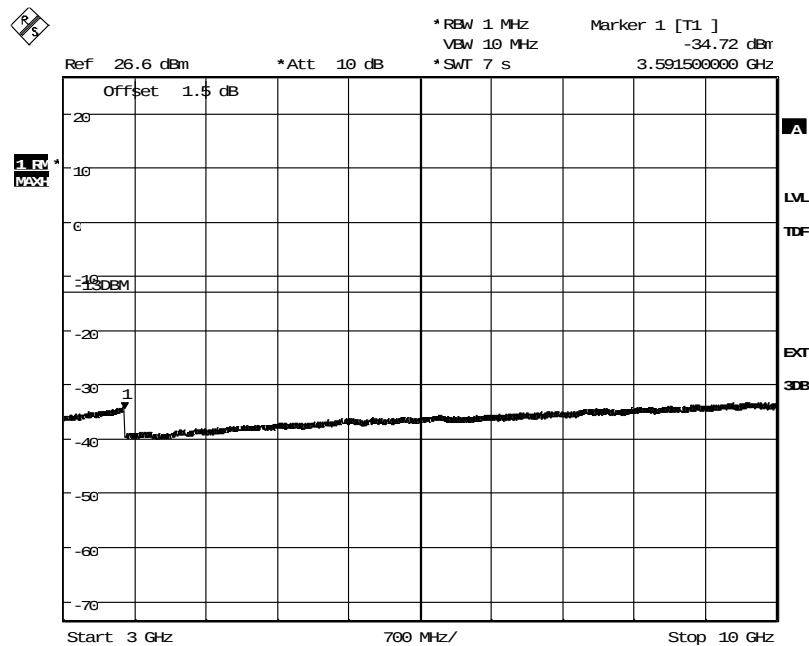

Date: 20.NOV.2013 09:01:08


Appendix 6

Diagram 9 c:

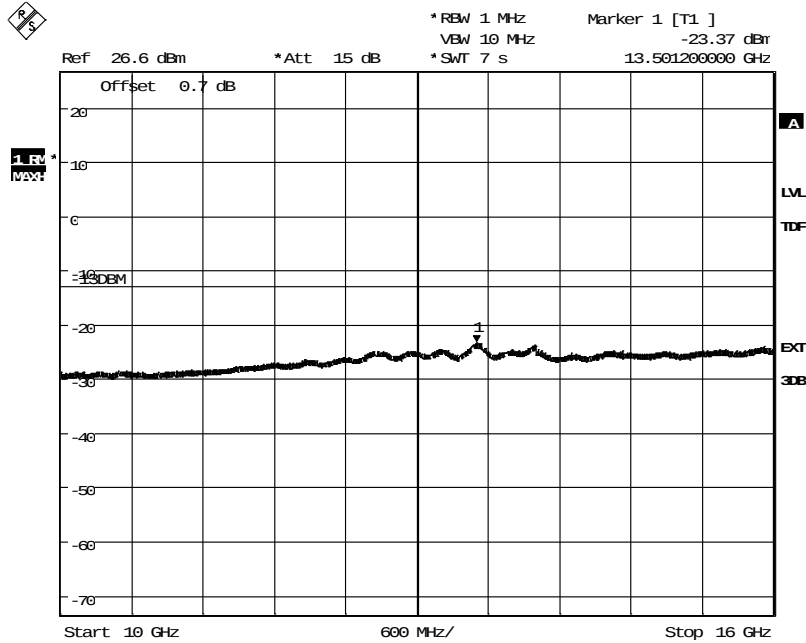

Date: 20.NOV.2013 09:00:13


Diagram 9 d:

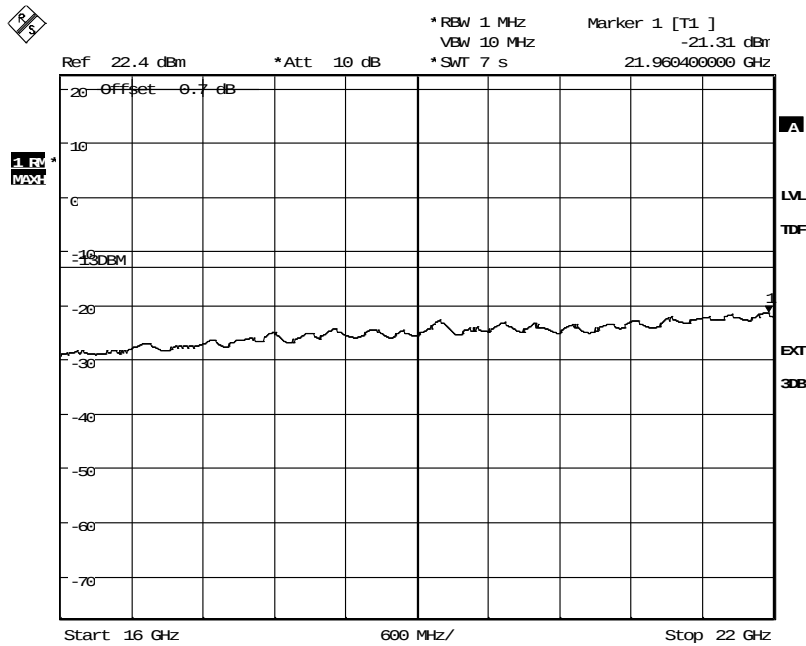

Date: 20.NOV.2013 08:59:18


Appendix 6

Diagram 10 a:

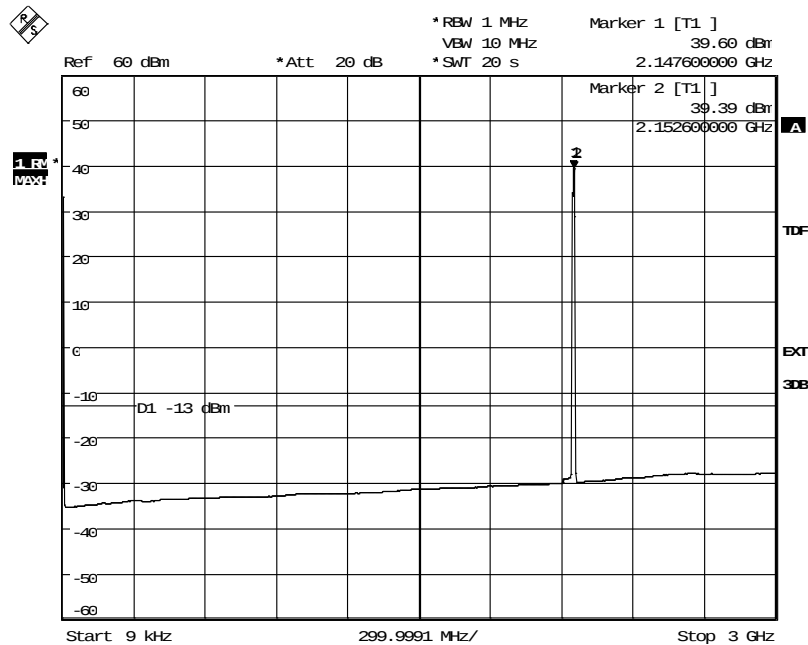

Date: 20.NOV.2013 14:58:23


Diagram 10 b:

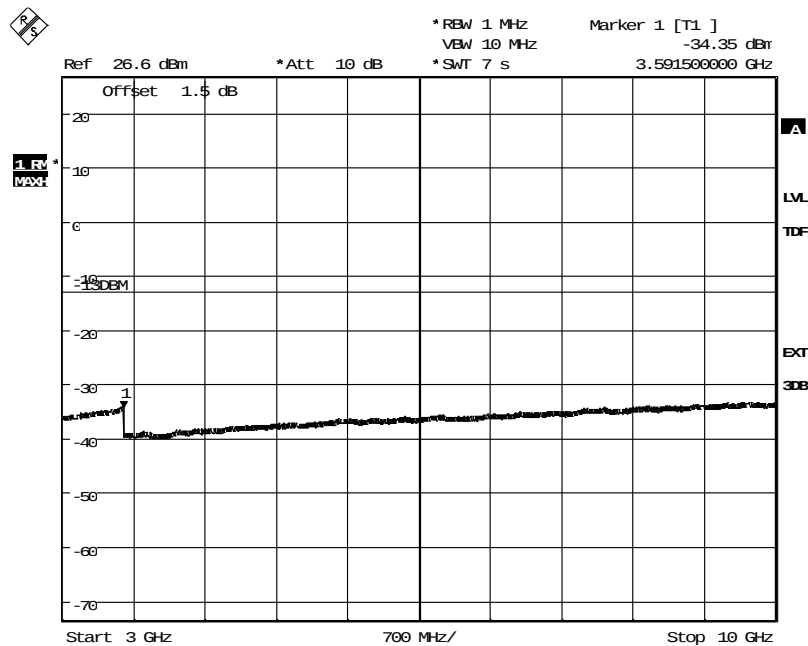

Date: 20.NOV.2013 15:01:39


Appendix 6

Diagram 10 c:

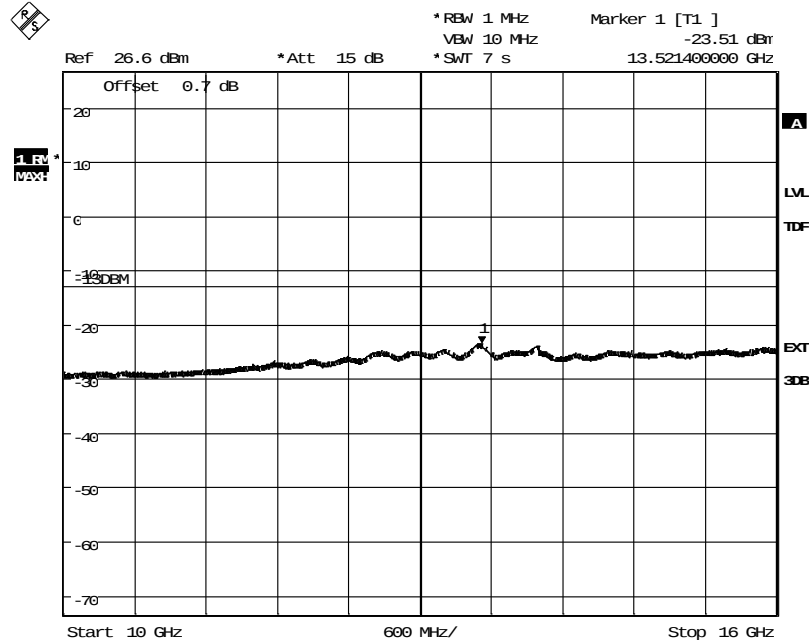

Date: 20.NOV.2013 15:06:18


Diagram 10 d:

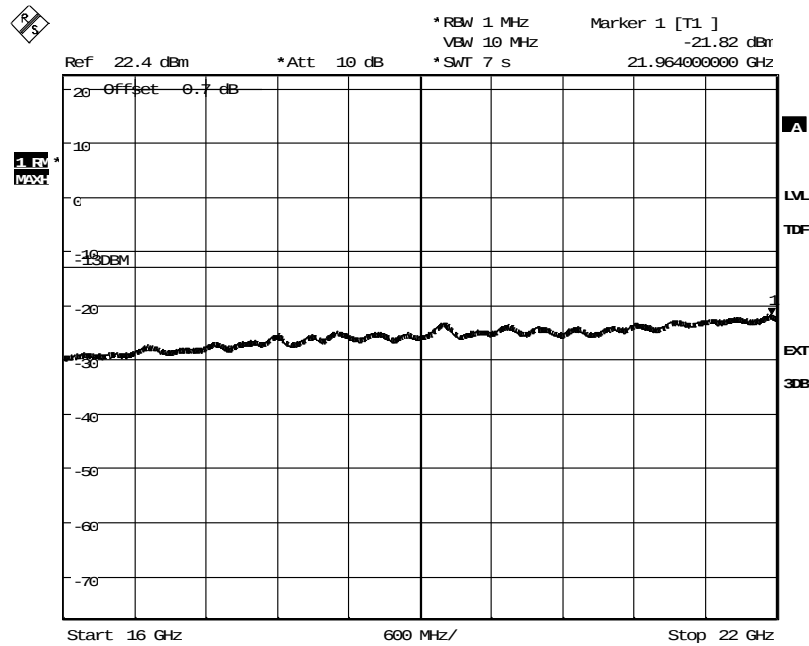

Date: 20.NOV.2013 15:07:41


Appendix 6

Diagram 11 a:

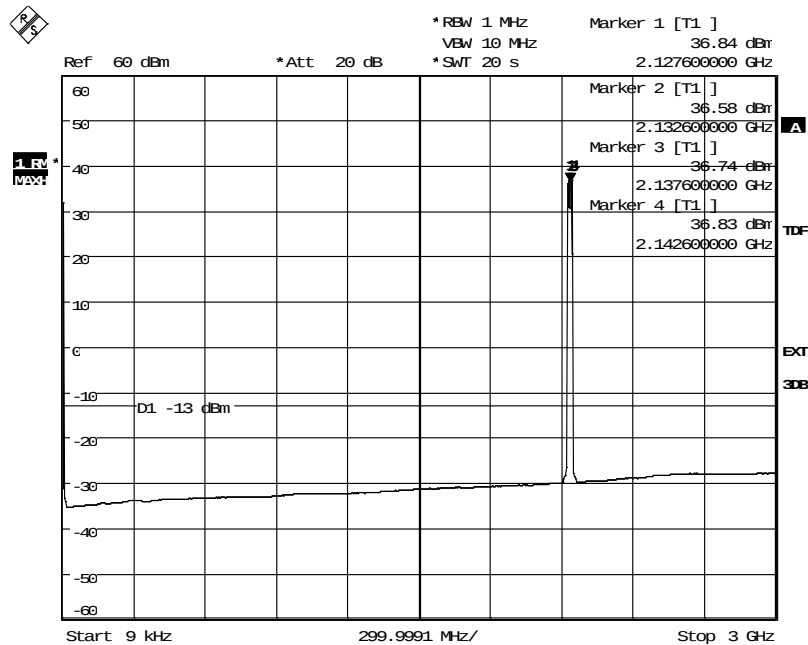

Date: 20.NOV.2013 15:54:07


Diagram 11 b:

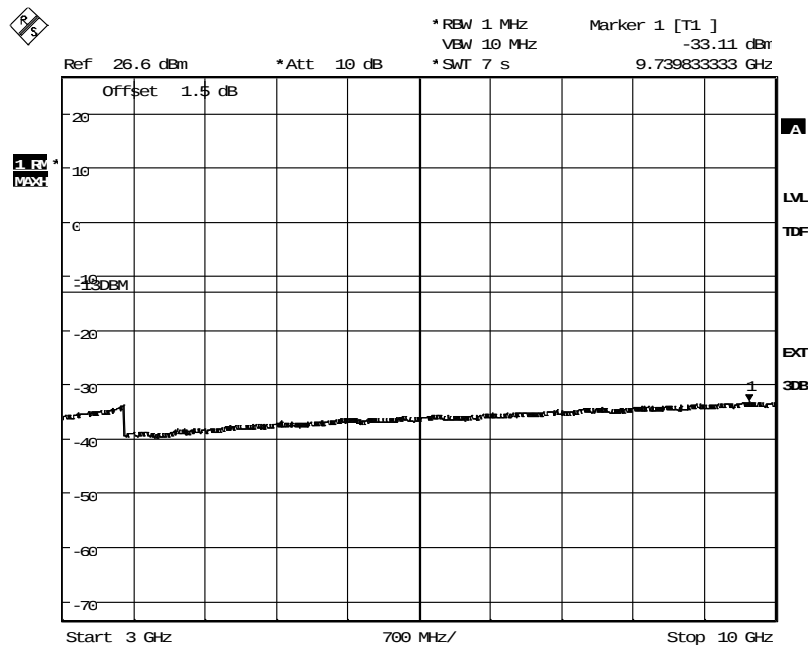

Date: 20.NOV.2013 15:58:09


Appendix 6

Diagram 11 c:

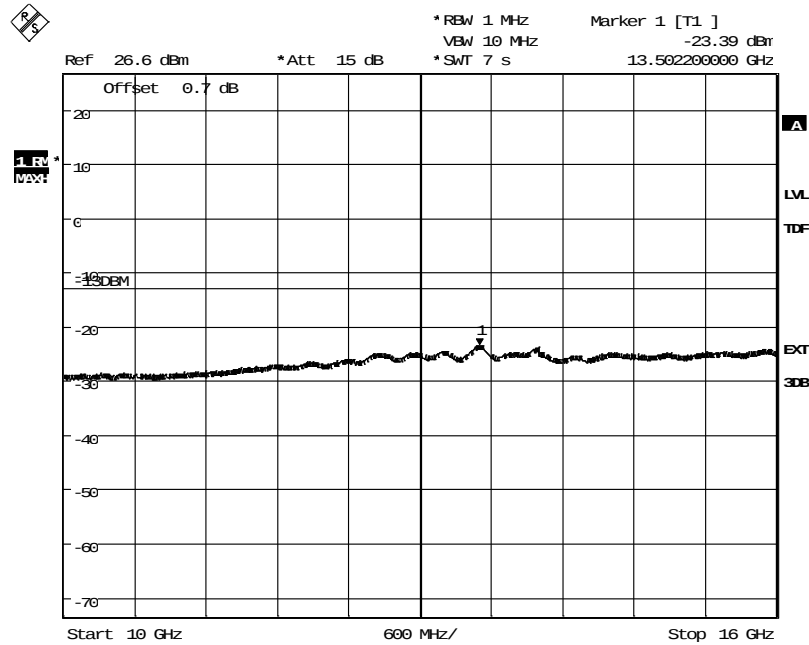

Date: 20.NOV.2013 15:59:08

Diagram 11 d:

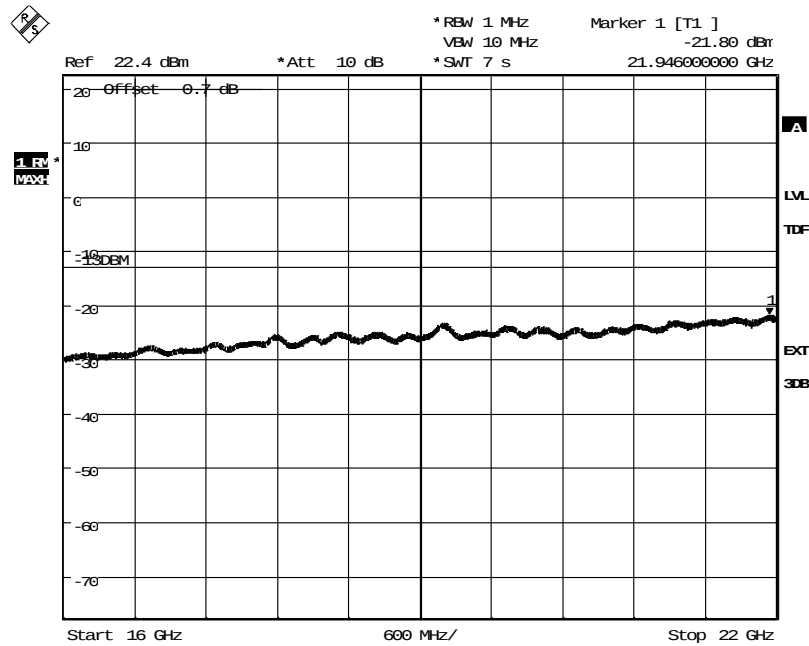

Date: 20.NOV.2013 15:59:50

Appendix 7

Field strength of spurious radiation measurements according to 47 CFR 27.53 (h) / IC RSS-139 6.5

Date	Temperature	Humidity
2013-11-15	23°C ± 3°C	36 % ± 5 %
2013-11-18	22°C ± 3°C	29 % ± 5 %

Test set-up and procedure

The test sites are listed at FCC, Columbia with registration number: 93866. The test site complies with RSS-Gen, Industry Canada file no. 3482A-2.

The measurements were performed with both horizontal and vertical polarization of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 18 GHz and 1m in the frequency range 18 - 22 GHz.

In the frequency range 30 MHz – 22 GHz the measurement was performed in power with a RBW of 1 MHz. A propagation loss in free space was calculated. The used formula was


$$\gamma = 20 \log \left(\frac{4\pi D}{\lambda} \right), \gamma \text{ is the propagation loss and } D \text{ is the antenna distance.}$$

The measurement procedure was as the following:

1. The pre-measurement was first performed with peak detector. The EUT was measured in eight directions and with the antenna at three heights, 1.0 m, 1.5 m and 2.0 m.
2. Spurious radiation on frequencies closer than 20 dB to the limit in the pre-measurement is scanned 0-360 degrees and the antenna is scanned 1- 4 m for maximum response. The emission is then measured with the RMS detector and the RMS value is reported. Frequencies closer than 10 dB to the limit when measured with the RMS detector were measured with the substitution method according to the standard.

Appendix 7

The test setup during the spurious radiation measurements is shown in the picture below:

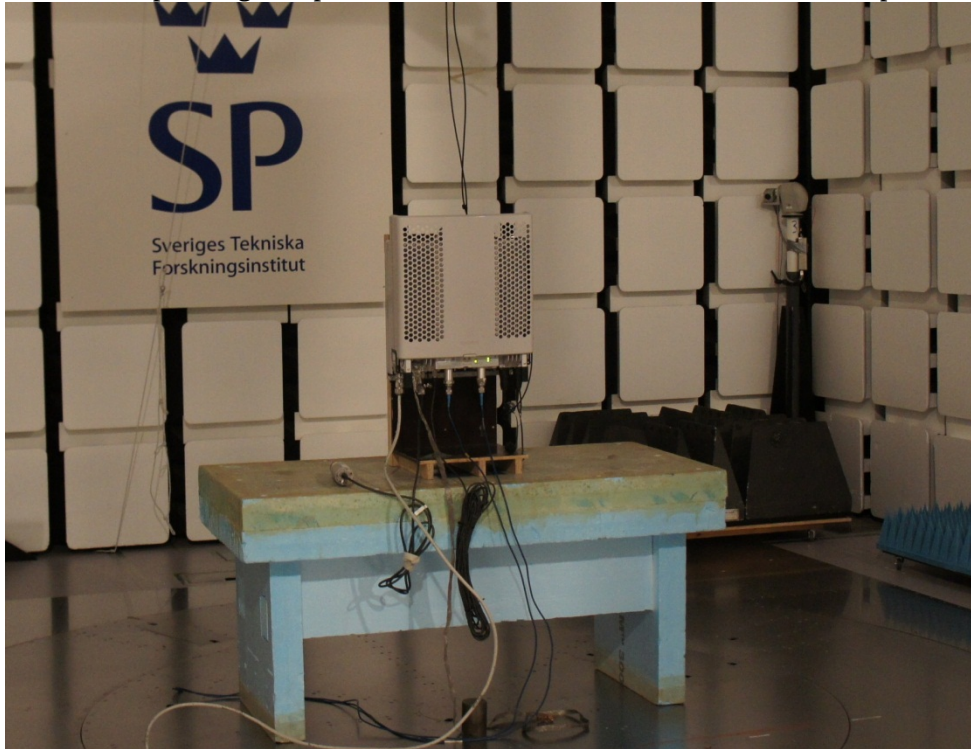

Measurement equipment

Measurement equipment	SP number
Semi anechoic chamber	503 881
R&S ESU 26	901 553
EMC 32 ver. 8.52.0	503 899
Chase Bilog Antenna CBL 6111A	502 182
EMCO Horn Antenna 3115	502 175
Flann STD Gain Horn Antenna 20240-20	503 674
High pass filter, RLC Electronics	503 739
Miteq, Low Noise Amplifier	503 285
Schwarzbeck preamplifier BBV 9742	504 085
µComp Nordic, Low Noise Amplifier	901 545
Temperature and humidity meter, Testo 625	504 188

Appendix 7

Tested configurations

Symbolic name
B
M
T
M2
M4

Results, representing worst case

Diagram	Symbolic name
1 a-d	M4

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-22 000	All emission > 20 dB below limit	All emission > 20 dB below limit

Measurement uncertainty:

3.2 dB up to 18 GHz, 3.6 dB above 18 GHz

Limits

§27.53(h) and RSS-139 6.5

Outside a licensee's frequency band(s) of operation the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, resulting in a limit of -13 dBm per 1 MHz RBW.

Complies?	Yes
-----------	-----

Appendix 7

Diagram 1 a:


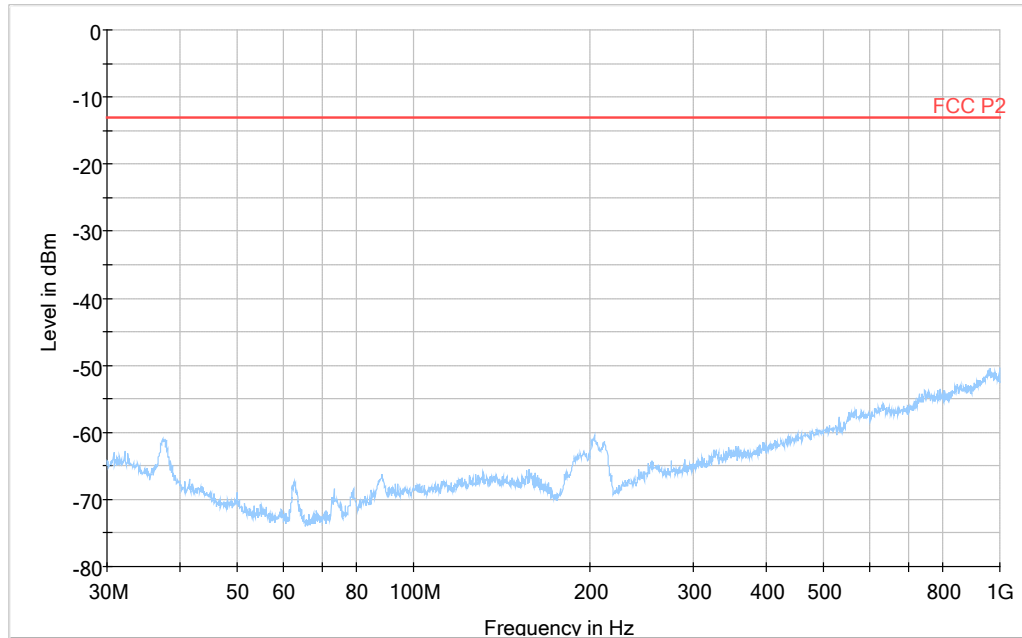


Diagram 1 b:

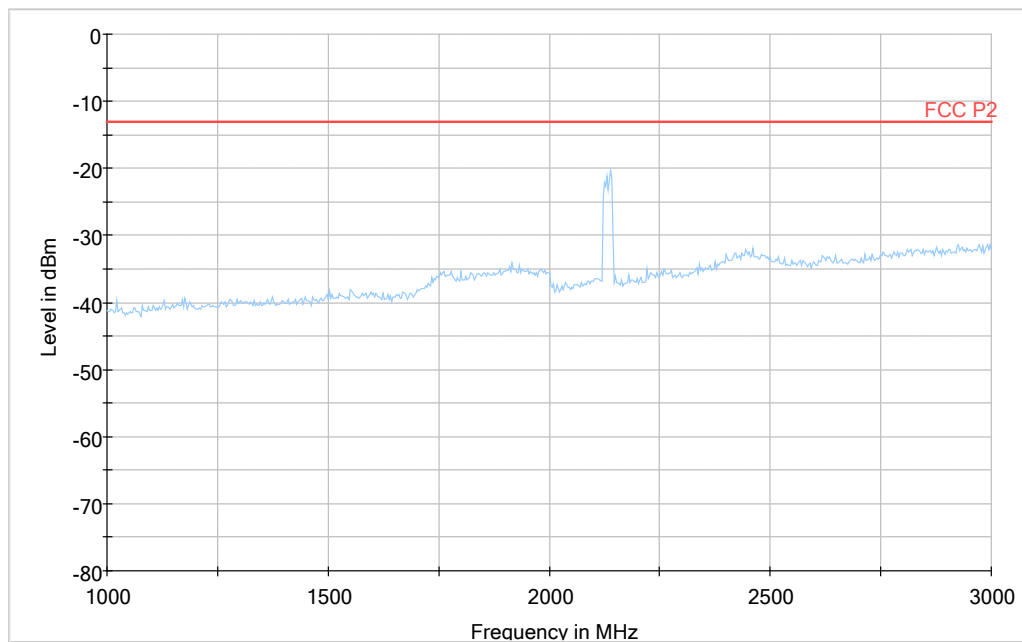

Note: The emission at 2122.5 and 2142.5MHz is the carriers frequency and shall be ignored in the context.

Appendix 7

Diagram 1 c:


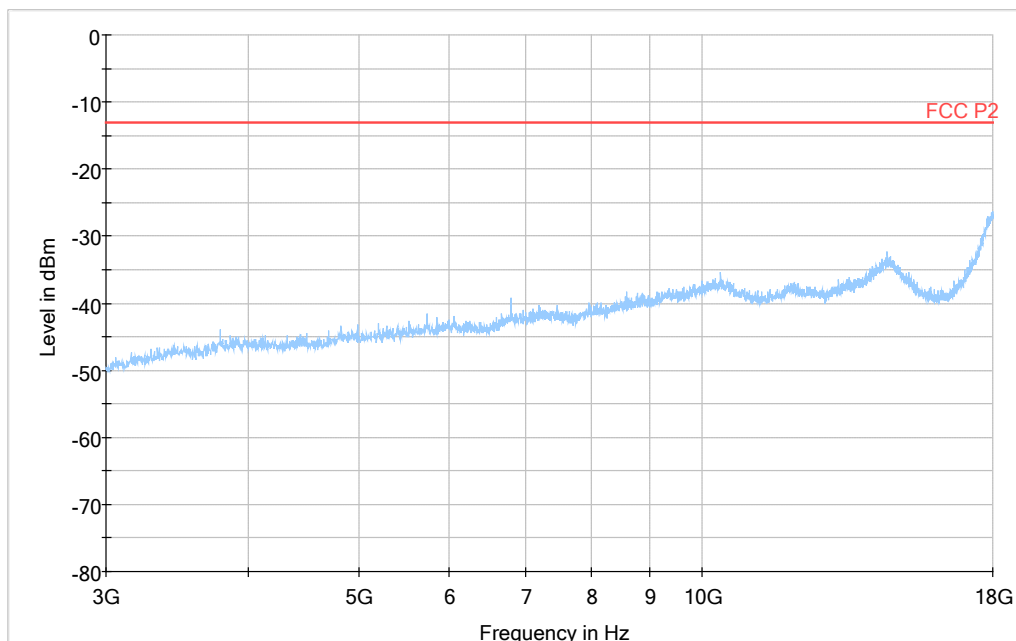


Diagram 1 d:

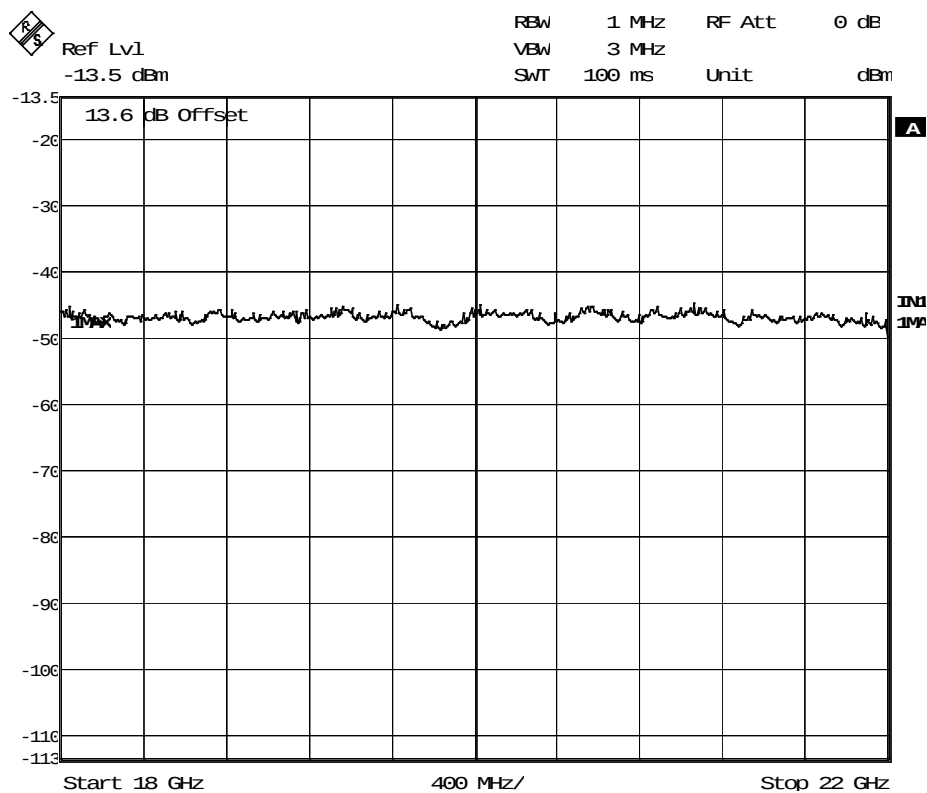

Date: 18.NOV.2013 17:22:27

Appendix 8

Frequency stability measurements according to CFR 47 §27.54 / IC RSS 139 6.3

Date 2013-11-29 to 2013-12-04	Temperature (test equipment) 19-23 °C ± 3 °C	Humidity (test equipment) 20-33 % ± 5 %
----------------------------------	---	--

Test set-up and procedure

The measurement was made per 3GPP TS 25.141. The output was connected to a spectrum analyzer. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz signal analyzer FSQ40	504 143
RF attenuator	902 282
Testo 635, Temperature and humidity meter	504 203
Temperature cabinet	503 360

Results

Maximum output power at mid channel (M). Rated output power level at connector RF A (maximum): 47.8 dBm (60 W).

Test conditions		Frequency error (Hz)
Supply voltage DC (V)	Temp (°C)	
-48.0	+20	-6
-55.2	+20	-4
-40.8	+20	-7
-48.0	+30	-3
-48.0	+40	-3
-48.0	+50	+5
-48.0	+10	+13
-48.0	0	+7
-48.0	-10	+5
-48.0	-20	-6
-48.0	-30	-8
Maximum freq. error (Hz)		13
Measurement uncertainty		$< \pm 1 \times 10^{-7}$

Appendix 8

Limits

Limit according to 3GPP TS 25.141:

The frequency error shall be within $\pm 0.05 \text{ PPM} \pm 12 \text{ Hz}$ ($\pm 118.63 \text{ Hz}$).

§27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

RSS-139 6.3 Frequency:

The frequency stability shall be sufficient to ensure that the emission bandwidth stays within the operating frequency block when tested to the temperature and supply voltage variations specified in RSS-Gen.

Complies?	Yes
-----------	-----


Appendix 8

External photos

Front side



Rear side

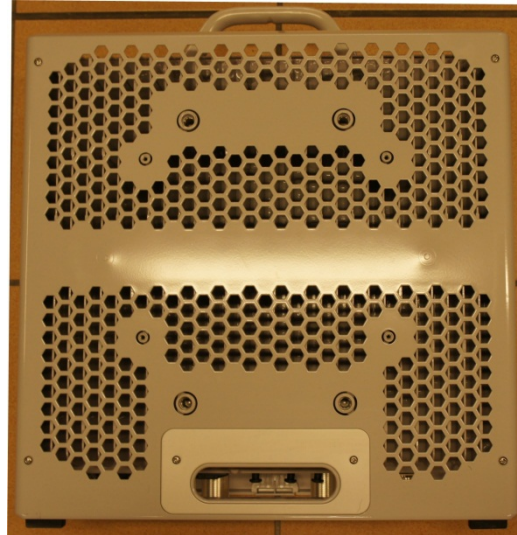

Appendix 8

Top side



Bottom side

