



TEST REPORT

No.I18Z62307-WMD04

for

Remote Radio Unit AIR 6488 B41

FCC ID: TA8CKRD901108

In accordance with FCC CFR 47 Part 27

Issued Date: 2019-03-05



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

ISED(IC) accredited test site number: 12389A-1 / 12389B-1

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I18Z62307-WMD04	Rev.0	1 st edition	2019-03-05
I18Z62307-WMD04	Rev.1	Editorial modification in Project data and Test Equipment Utilized	2019-03-05
I18Z62307-WMD04	Rev.2	Editorial modification in about EUT and Test Setup	2019-03-05

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. PROJECT DATA	4
1.3. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT).....	6
3.1. ABOUT EUT	6
3.2. GENERAL DESCRIPTION	7
3.3. CONFIGURATION DESCRIPTION	8
4. REFERENCE DOCUMENTS	10
4.1. REFERENCE DOCUMENTS FOR TESTING	10
5. TEST SETUP	11
6. LABORATORY ENVIRONMENT	12
7. SUMMARY OF TEST RESULTS	13
8. TEST EQUIPMENT UTILIZED	14
9. MEASUREMENT UNCERTAINTY	14
ANNEX A: MEASUREMENT RESULTS.....	15
A.1 MAXIMUM OUTPUT POWER AND PEAK TO AVERAGE POWER RATIO - EIRP CALCULATION	15
A.2 OCCUPIED BANDWIDTH	26
A.3 SPURIOUS EMISSIONS AT BAND EDGE	42
A.4 CONDUCTED SPURIOUS EMISSION.....	54
A.5 RADIATED SPURIOUS EMISSION	67
A.6 FREQUENCY STABILITY	78
ANNEX B: ACCREDITATION CERTIFICATE.....	81

1. Test Laboratory

1.1. Testing Location

Location 1:CTTL(Kangding Road) 12389B-1

Address: No. 18, Kangding Road, Yizhuang, Beijing,
P. R. China 100176

Location 2:CTTL(Shouxiang) conducted testing

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China100191

1.2. Project data

Testing Start Date: 2018-12-19

Testing End Date: 2019-03-05

1.3. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Liu Baodian
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Ericsson (China) Communications Company Ltd.
Address /Post: Ericsson Tower, No.5 Lize East Street, Chaoyang District, Beijing
100102, P.R.China
Contact: Xiaoying Jiang
Email: Xiaoying.jiang@ericsson.com
Telephone: +86 10 8476 7125

2.2. Manufacturer Information

Company Name: Ericsson AB
Address /Post: Isafjordsgatan 10, 164 80 Stockholm
Sweden
Contact: /
Email: /
Telephone: /

3. Equipment Under Test (EUT)

3.1. About EUT

Description	Remote Radio Unit
Product Name	AIR 6488 B41
Product Number	KRD 901 108/2, KRD 901 108/21, KRD 901 108/1, KRD 901 108/11 (note)
FCC ID	TA8CKRD901108
Antenna	YES
Antenna Gain	23dBi
Output power	Maximum 30.97dBm (1.25W) per port for NR 20MHz channel bandwidth Maximum 33.98dBm (2.5W) per port for NR 40MHz channel bandwidth Maximum 34.95dBm (3.125W) per port for LTE
Power source	-48V DC
Serial Number	R1C: D828356049; R1D: D828634051
Hardware Version	R1C, R1D
Software Version	UP: CXP2010046/5_R13A70, Radio SW: CXP2030020/4_R14A44 for NR 40MHz channel bandwidth UP: CXP2010046/5_R12A258, Radio SW: CXP2030020/4_R13A67 for NR 20MHz channel bandwidth UP: CXP2010053/1_R33A160, Radio SW: CXP2030020/5_R2A91 for split mode of NR and LTE
Frequency range	TX/RX: 2496MHz-2690MHz
Number of Antenna ports	64TX /64 RX ports
Maximum RF bandwidth (IBW)	100MHz
Maximum Number of supported carriers per port	LTE: up to 3 carriers NR: 1 carrier
Supported modulations	LTE: QPSK, 16QAM, 64QAM and 256QAM NR: QPSK, 64QAM and 256QAM
Supported Channel bandwidth	LTE: 20MHz NR: 20MHz and 40MHz
Date of receipt	Sample R1C: 2018-12-19 Sample R1D: 2019-02-22

Note: The differences between the 4 variants are as below, and others are same.

KRD 901 108/2 with un-security software and RDNB board for testing purpose

KRD 901 108/21 with security software and RDNB board for testing purpose

KRD 901 108/1 with un-security software and antenna

KRD 901 108/11 with security software and antenna

3.2. General Description

The Equipment Under Test (EUT) AIR 6488 B41 is an Ericsson Radio Unit working in the public mobile service 2496-2690 MHz band which provides communication connections to 2496-2690 MHz network. The AIR 6488 B41 operates from a -48V DC supply.

The EUT includes 64 TX/RX ports. It can operate in single RAT NR. It can also operate in a split mode of LTE and NR whereby 32 ports can be assigned to LTE and 32 ports to NR. It can be configured to transmit in MIMO mode, and MIMO mode was used for measurements as the worst configuration. The complete testing was performed with the EUT transmitting at maximum RF power unless otherwise stated.

A full technical description can be found in the Manufacturer's documentation.

3.3. Configuration Description

The following settings were used to represent all traffic scenarios. The output power was measured on the bottom, middle and top channel of all applicable antenna ports. By measuring the output power of QPSK, 64QAM and 256QAM for NR on one of the antenna ports, it was determined that QPSK was the worst case modulation scheme and was used for all testing. By measuring the output power of QPSK, 16QAM, 64QAM and 256QAM for LTE on one of the antenna ports, it was determined that QPSK was the worst case modulation scheme and was used for all testing.

Complete testing was carried out on the worst case antenna port which was established as being the highest output power from the 64 measured ports(32 ports for LTE in split mode) on worst case modulation scheme. This antenna port was 8 for LTE in split mode of LTE and NR, 25 for single RAT NR 40MHz channel bandwidth and 55 for single RAT NR 20MHz channel bandwidth.

In split mode, carriers cannot be placed on the same frequency. The power level from each port in split mode is identical to that in single RAT mode NR or LTE. The output power of NR carrier in split mode is deemed to have been covered by testing NR single RAT mode as this represents the highest output power with all 64 ports measured and summed in accordance with FCC KDB 662911.

The settings below were used for all measurements unless otherwise noted:

Split mode: LTE + NR

Configuration	Carrier	Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
LTE+NR-MIMO-MC-2	1LTE+1NR	LTE 20MHz, NR 40MHz	-	(L)2506+(NR)2670	-
LTE+NR-MIMO-MC-4	2LTE+1NR	LTE 20MHz, NR 40MHz	-	(L)2506+2586+(NR)2670	-
LTE+NR-MIMO-MC-6	3LTE+1NR	LTE 20MHz, NR 40MHz	-	(L)2506+2566+2586+(NR)2670	-
LTE+NR-MIMO-MC-7	1LTE+1NR	LTE 20MHz, NR 40MHz	(L)2506+(NR)2576.01	(L)2553+(NR)2623.02	(L)2600 + (NR)2670
LTE+NR-MIMO-MC-8	2LTE+1NR	LTE 20MHz, NR 40MHz	(L)2506+2586+(NR)2616	(L)2553+2633+(NR)2663.01	(L)2560 + 2640 + (NR)2670
LTE+NR-MIMO-MC-9	3LTE+1NR	LTE 20MHz, NR 40MHz	(L)2506+2566+2586+(NR)2616	(L)2553+2613+2633+(NR)2663.01	(L)2560 + 2620 + 2640 + (NR)2670
LTE+NR-MIMO-MC-10	1LTE+1NR	LTE 20MHz, NR 40MHz	(L)2506+(NR)2670	(L)2593+(NR)2670	(NR)2516.01+(L)2680
LTE+NR-MIMO-MC-1-BE	1LTE+1NR	LTE 20MHz, NR 40MHz	(L)2506+(NR)2536.02	N/A	(NR)2650.02+(L)2680
LTE+NR-MIMO-MC-2-BE	2LTE+1NR	LTE 20MHz, NR 40MHz	(L)2506+2526+(NR)2556	N/A	(NR)2630.01+(L)2660+2680
LTE+NR-MIMO-MC-3-BE	3LTE+1NR	LTE 20MHz, NR 40MHz	(L)2506+2526+2546+(NR)2576.01	N/A	(NR)2610+(L)2640+2660+2680



NR

Configuration	Carrier	Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR-MIMO-1C-20	1 Carrier	20MHz	2506.02	2593.02	2680.02
NR-MIMO-1C-BE-20	1 Carrier	20MHz	2506.02	N/A	2680.02
NR-MIMO-1C-40	1 Carrier	40MHz	2516.01	2593.02	2670.00
NR-MIMO-1C-BE-40	1 Carrier	40MHz	2516.01	N/A	2670.00

N/A – Not Applicable

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-18 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-17 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz	2014
ANSI 63.26	IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
TIA 102.CAAA-E	Project 25 Digital C4FM/CQPSK Transceiver Measurement Methods	2016
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01
KDB 662911 D01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band	v02r01

6. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Semi-anechoic chamber(10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ± 3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz



7. SUMMARY OF TEST RESULTS

Items	Test Name	Clause in FCC rules	Verdict
1	Maximum Output Power and Peak to Average Power Ratio - EIRP calculation	27.50(h), 2.1046	Pass
2	Occupied Bandwidth	27.53(m), 2.1049	Pass
3	Spurious Emissions at Band Edge	27.53(m), 2.1051	Pass
4	Conducted Spurious Emission	27.53(m), 2.1051	Pass
5	Radiated Spurious Emission	27.53(m), 2.1053	Pass
6	Frequency Stability	27.54, 2.1055	Pass

8. Test Equipment Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE
1	AC Power Supply	PCR2000M	PJ000583	Kikusui	2020-02-22
2	40dB Attenuator	66-40-33	CD4019	Aeroflex / Weinschel	-
3	40dB Attenuator	TSG150R-4-40N11	1511040001	Nanjing Jiexi Technologies	-
4	Spectrum Analyzer	N9030	MY53310464	Keysight	2020-01-21
5	Spectrum Analyzer	N9030	MY57142378	Keysight	2020-02-02
6	Spectrum Analyzer	N9030	MY54490239	Keysight	2019-07-31
7	Power Sensor	NRP-Z91	101500	Rohde & Schwarz	2019-11-25
8	Power Sensor	NRP-Z21	102432	Rohde & Schwarz	2019-07-31
9	Power Meter	NRVD	102040	Rohde & Schwarz	2019-05-03
10	EMI Antenna	3115	00167250	ETS-LINDGREN	2020-05-21
11	EMI Antenna	3116	2661	ETS-LINDGREN	2020-07-27
12	EMI Antenna	VULB 9163	9163-514	SCHWARZBECK	2021-01-03
13	Test Receiver	ESU26	100376	Rohde & Schwarz	2019-11-27
14	Climate Chamber	KTHG-415TBS	7353K	QINGSHENG	2020-01-14

9. MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Discipline	Measurement Uncertainty
Conducted Maximum Peak Output Power	0.5dB
Occupied Bandwidth	1.1Hz
Conducted Spurious Emissions	2.3dB
Band Edge	2.3dB
Radiated Spurious Emissions	5.4dB
Frequency Stability	$<\pm 1 \times 10^{-7}$

ANNEX A: MEASUREMENT RESULTS

A.1 Maximum Output Power and Peak to Average Power Ratio - EIRP calculation

A.1.1 Reference

FCC CFR 47 Part 2, Clause 2.1046

FCC CFR 47 Part 27, Clause 27.50(h)

A.1.2 Method of Measurements

During the process of testing, the EUT was configured to transmit on maximum power and proper modulation. The transmitter power shall be measured in terms of a root-mean-square (RMS) average value. In case of the EUT was configured to MIMO mode, since the EUT transmits on all antennas simultaneously in the same frequency range, using the Measure-and-Sum approach, the output power at all antennas were tested, and the total output power were then summed mathematically in linear power units according to FCC KDB 662911 D01.

A peak to average ratio measurement is performed at the conducted ports of the EUT for single carrier for single RAT mode. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) was used and 0.1% probability value recorded.

Two polarizations are generated for the beam. In single RAT mode, 32 ports are used to create each polarization. The antenna gain for each polarization is declared as 23 dBi, therefore the EIRP for each polarization is calculated as the sum of the power over 32 ports plus the antenna gain. In split mode, 16 ports are used to create each polarization. The antenna gain for each polarization is declared as 20 dBi, therefore the EIRP for each polarization is calculated as the sum of the power over 16 ports plus the antenna gain. This calculation is applied for each polarization and then each polarization EIRP is summed to calculate the overall EIRP.

A.1.3 Limit

Output Power:

$$\text{EIRP} \leq 33 \text{ dBW} + 10\log(X/Y) \text{ dBW} + 10 \log(360/\text{Beamwidth}) \text{ dBW}$$

X = 20MHz or 40MHz channel bandwidth

Y = 5.5 or 6 MHz

Beamwidth = 12°

Peak to Average Ratio: $\leq 13 \text{ dB}$

A.1.4 Measurement result



Configuration LTE+NR-MIMO-MC-7 (1LTE+1NR)
Maximum Output Power 30.97dBm per port for LTE

Port	Modulation/ Carrier Bandwidth (MHz)	LTE Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
1	QPSK/20.0	30.39	17.38	8.68	30.31	17.29	8.73	30.27	17.26	8.41
2	QPSK/20.0	30.90	17.89	8.70	31.05	18.04	8.73	30.99	17.98	8.79
3	QPSK/20.0	30.30	17.29	8.69	30.24	17.23	8.77	30.98	17.97	8.43
4	QPSK/20.0	30.84	17.83	8.65	30.91	17.90	8.72	30.25	17.24	8.70
5	QPSK/20.0	31.20	18.19	8.70	30.83	17.82	8.72	31.11	18.10	8.43
6	QPSK/20.0	31.44	17.81	8.68	31.01	18.14	8.69	31.30	18.29	8.73
7	QPSK/20.0	30.95	17.94	8.71	30.92	17.91	8.72	30.97	17.96	8.42
8	QPSK/20.0	31.30	18.28	8.68	31.08	18.36	8.64	31.53	18.52	8.66
9	QPSK/20.0	30.02	17.01	8.36	30.16	17.15	8.49	30.21	17.20	8.41
10	QPSK/20.0	30.23	17.22	8.34	30.36	17.35	8.47	30.24	17.23	8.49
11	QPSK/20.0	30.12	17.11	8.50	30.17	17.16	8.51	30.33	17.32	8.43
12	QPSK/20.0	30.32	17.31	8.51	30.46	17.45	8.50	30.41	17.40	8.51
13	QPSK/20.0	30.69	17.68	8.47	30.75	17.74	8.50	30.83	17.83	8.42
14	QPSK/20.0	30.53	17.52	8.49	30.56	17.52	8.45	30.63	17.62	8.47
15	QPSK/20.0	30.69	17.68	8.50	30.58	17.56	8.51	30.64	17.63	8.42
16	QPSK/20.0	30.81	17.80	8.48	30.80	17.79	8.47	30.93	17.92	8.48
Total Power1-16		42.73	29.68	-	42.69	29.71	-	42.79	29.78	-
Total Power1-16+20dBi		62.73	49.68	-	62.69	49.71	-	62.79	49.78	-
33	QPSK/20.0	30.75	17.74	8.68	30.79	17.77	8.66	30.66	17.65	8.44
34	QPSK/20.0	31.02	18.01	8.71	31.01	18.10	8.71	31.12	18.11	8.80
35	QPSK/20.0	31.03	18.02	8.72	30.62	17.61	8.71	31.09	18.08	8.41
36	QPSK/20.0	30.66	17.65	8.71	31.06	18.11	8.79	30.51	17.49	8.71
37	QPSK/20.0	30.15	17.14	8.71	30.14	17.24	8.77	30.26	17.25	8.40
38	QPSK/20.0	30.21	17.20	8.67	30.35	17.34	8.71	30.21	17.20	8.75
39	QPSK/20.0	30.25	16.84	8.68	30.30	17.30	8.72	29.86	16.83	8.43
40	QPSK/20.0	30.28	17.27	8.72	30.32	17.31	8.69	30.29	17.28	8.76
41	QPSK/20.0	30.65	17.64	8.50	30.90	18.01	8.49	30.61	17.61	8.42
42	QPSK/20.0	31.02	18.01	8.50	31.06	18.09	8.50	31.15	18.14	8.46
43	QPSK/20.0	30.76	17.75	8.52	30.75	17.72	8.48	30.62	17.61	8.45
44	QPSK/20.0	30.95	17.99	8.50	31.03	18.09	8.52	31.10	18.09	8.50
45	QPSK/20.0	30.22	17.17	8.45	30.37	17.32	8.49	30.21	17.20	8.41
46	QPSK/20.0	30.19	17.16	8.50	30.28	17.27	8.49	30.22	17.21	8.46
47	QPSK/20.0	30.25	17.22	8.49	30.42	17.41	8.49	30.21	17.20	8.47
48	QPSK/20.0	30.31	17.29	8.50	30.43	17.39	8.48	30.19	17.18	8.42
Total Power33-48		42.60	29.56	-	42.67	29.68	-	42.58	29.57	-
Total Power33-48+20dBi		62.60	49.56	-	62.67	49.68	-	62.58	49.57	-
LTE EIRP		65.68	52.63	-	65.69	52.71	-	65.69	52.69	-



Port	Modulation/ Carrier Bandwidth (MHz)	LTE Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
8	16QAM/20.0	31.12	18.18	8.52	31.05	18.20	8.55	31.34	18.32	8.49
8	64QAM/20.0	31.11	18.12	8.43	31.06	18.18	8.37	31.37	18.33	8.41
8	256QAM/20.0	31.11	18.12	8.50	31.06	18.18	8.49	31.36	18.34	8.50



Configuration LTE+NR-MIMO-MC-8 (2LTE+1NR)

Maximum Output Power 33.98dBm per port for LTE

Port	Modulation/ Carrier Bandwidth (MHz)	LTE Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
1	QPSK/20.0	33.34	-	-	33.20	-	-	33.25	-	-
2	QPSK/20.0	33.93	-	-	33.92	-	-	33.83	-	-
3	QPSK/20.0	33.62	-	-	33.45	-	-	33.26	-	-
4	QPSK/20.0	33.52	-	-	33.54	-	-	33.78	-	-
5	QPSK/20.0	34.02	-	-	33.75	-	-	33.90	-	-
6	QPSK/20.0	34.47	-	-	34.35	-	-	34.37	-	-
7	QPSK/20.0	33.97	-	-	33.78	-	-	33.99	-	-
8	QPSK/20.0	34.23	-	-	34.28	-	-	34.24	-	-
9	QPSK/20.0	33.12	-	-	33.22	-	-	33.03	-	-
10	QPSK/20.0	33.20	-	-	33.02	-	-	33.13	-	-
11	QPSK/20.0	33.16	-	-	33.14	-	-	33.09	-	-
12	QPSK/20.0	33.36	-	-	33.33	-	-	33.17	-	-
13	QPSK/20.0	33.69	-	-	33.66	-	-	33.81	-	-
14	QPSK/20.0	33.48	-	-	33.47	-	-	33.47	-	-
15	QPSK/20.0	33.99	-	-	33.52	-	-	33.64	-	-
16	QPSK/20.0	33.96	-	-	33.76	-	-	33.73	-	-
Total Power 1-16		45.75	-	-	45.64	-	-	45.67	-	-
Total Power 1-16+20 dBi		65.75	-	-	65.64	-	-	65.67	-	-
33	QPSK/20.0	33.88	-	-	33.97	-	-	33.72	-	-
34	QPSK/20.0	34.13	-	-	34.06	-	-	33.88	-	-
35	QPSK/20.0	33.81	-	-	33.78	-	-	33.55	-	-
36	QPSK/20.0	34.03	-	-	34.13	-	-	33.90	-	-
37	QPSK/20.0	33.10	-	-	33.17	-	-	33.04	-	-
38	QPSK/20.0	33.07	-	-	33.38	-	-	33.02	-	-
39	QPSK/20.0	33.05	-	-	33.05	-	-	33.02	-	-
40	QPSK/20.0	33.23	-	-	33.20	-	-	33.09	-	-
41	QPSK/20.0	33.94	-	-	33.76	-	-	33.63	-	-
42	QPSK/20.0	34.06	-	-	34.00	-	-	33.88	-	-
43	QPSK/20.0	33.90	-	-	33.98	-	-	33.59	-	-
44	QPSK/20.0	33.99	-	-	34.23	-	-	33.92	-	-
45	QPSK/20.0	33.04	-	-	33.00	-	-	33.03	-	-
46	QPSK/20.0	33.11	-	-	33.13	-	-	33.08	-	-
47	QPSK/20.0	33.05	-	-	33.13	-	-	33.03	-	-
48	QPSK/20.0	33.15	-	-	33.28	-	-	33.11	-	-
Total Power 33-48		45.60	-	-	45.64	-	-	45.46	-	-
Total Power33-48+20dBi		65.60	-	-	65.64	-	-	65.46	-	-
LTE EIRP		68.69	-	-	68.64	-	-	68.58	-	-



Configuration LTE+NR-MIMO-MC-9 (3LTE+1NR)

Maximum Output Power 34.95dBm per port for LTE

Port	Modulation/ Carrier Bandwidth (MHz)	LTE Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
1	QPSK/20.0	33.94	-	-	33.84	-	-	34.03	-	-
2	QPSK/20.0	34.37	-	-	34.31	-	-	34.26	-	-
3	QPSK/20.0	33.79	-	-	34.07	-	-	34.00	-	-
4	QPSK/20.0	34.19	-	-	33.97	-	-	34.18	-	-
5	QPSK/20.0	34.41	-	-	34.39	-	-	34.30	-	-
6	QPSK/20.0	34.82	-	-	34.55	-	-	34.77	-	-
7	QPSK/20.0	34.61	-	-	34.64	-	-	34.43	-	-
8	QPSK/20.0	34.63	-	-	34.69	-	-	34.66	-	-
9	QPSK/20.0	33.70	-	-	33.58	-	-	33.52	-	-
10	QPSK/20.0	33.63	-	-	33.50	-	-	33.60	-	-
11	QPSK/20.0	33.82	-	-	33.74	-	-	33.50	-	-
12	QPSK/20.0	33.82	-	-	33.77	-	-	33.61	-	-
13	QPSK/20.0	34.33	-	-	34.34	-	-	34.25	-	-
14	QPSK/20.0	33.87	-	-	33.91	-	-	33.79	-	-
15	QPSK/20.0	34.37	-	-	34.19	-	-	34.07	-	-
16	QPSK/20.0	34.34	-	-	34.19	-	-	34.09	-	-
Total Power 1-16		46.22	-	-	46.16	-	-	46.12	-	-
Total Power 1-16+20 dBi		66.22	-	-	66.16	-	-	66.12	-	-
33	QPSK/20.0	34.38	-	-	34.42	-	-	34.21	-	-
34	QPSK/20.0	34.39	-	-	34.51	-	-	34.26	-	-
35	QPSK/20.0	34.19	-	-	34.47	-	-	34.03	-	-
36	QPSK/20.0	34.40	-	-	34.38	-	-	34.26	-	-
37	QPSK/20.0	33.41	-	-	33.27	-	-	33.31	-	-
38	QPSK/20.0	33.57	-	-	33.81	-	-	33.42	-	-
39	QPSK/20.0	33.51	-	-	33.43	-	-	33.32	-	-
40	QPSK/20.0	33.63	-	-	33.60	-	-	33.47	-	-
41	QPSK/20.0	34.31	-	-	34.18	-	-	34.10	-	-
42	QPSK/20.0	34.51	-	-	34.47	-	-	34.31	-	-
43	QPSK/20.0	34.29	-	-	34.45	-	-	34.08	-	-
44	QPSK/20.0	34.45	-	-	34.65	-	-	34.31	-	-
45	QPSK/20.0	33.48	-	-	33.49	-	-	33.30	-	-
46	QPSK/20.0	33.56	-	-	33.60	-	-	33.51	-	-
47	QPSK/20.0	33.42	-	-	33.59	-	-	33.29	-	-
48	QPSK/20.0	33.60	-	-	33.73	-	-	33.52	-	-
Total Power33-48		46.01	-	-	46.07	-	-	45.85	-	-
Total Power33-48+20dBi		66.01	-	-	66.07	-	-	65.85	-	-
LTE EIRP		69.13	-	-	69.13	-	-	69.00	-	-



Configuration NR-MIMO-1C-20

Maximum Output Power 30.97dBm per port

Port	Modulation/ Carrier Bandwidth (MHz)	NR Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
1	QPSK/20.0	30.30	17.27	8.84	30.33	17.33	8.83	30.35	17.30	8.86
2	QPSK/20.0	30.06	17.05	8.95	30.24	17.24	8.96	30.26	17.25	8.90
3	QPSK/20.0	30.09	17.05	8.85	30.02	17.01	8.83	30.36	17.35	8.88
4	QPSK/20.0	30.21	17.20	8.90	30.44	17.44	8.81	30.55	17.50	8.85
5	QPSK/20.0	30.43	17.42	8.86	30.53	17.56	8.83	30.65	17.60	8.90
6	QPSK/20.0	30.34	17.31	8.83	30.59	17.59	8.83	30.54	17.53	8.88
7	QPSK/20.0	30.33	17.35	8.88	30.47	17.46	8.86	30.45	17.43	8.87
8	QPSK/20.0	30.36	17.35	8.86	30.53	17.51	8.84	30.54	17.52	8.90
9	QPSK/20.0	30.29	17.28	8.85	30.41	17.36	8.86	30.40	17.35	8.89
10	QPSK/20.0	30.19	17.18	8.85	30.27	17.26	8.85	30.42	17.38	8.88
11	QPSK/20.0	30.14	17.14	8.84	30.33	17.32	8.84	30.23	17.23	8.88
12	QPSK/20.0	30.17	17.16	8.84	30.31	17.30	8.86	30.25	17.19	8.89
13	QPSK/20.0	30.56	17.54	8.85	30.74	17.73	8.82	30.60	17.55	8.88
14	QPSK/20.0	30.65	17.66	8.84	30.76	17.74	8.84	30.75	17.71	8.86
15	QPSK/20.0	30.68	17.62	8.84	30.77	17.76	8.84	30.75	17.74	8.88
16	QPSK/20.0	30.45	17.45	8.84	30.67	17.67	8.83	30.80	17.77	8.86
17	QPSK/20.0	30.55	17.53	8.85	30.63	17.62	8.85	30.61	17.60	8.90
18	QPSK/20.0	30.45	17.41	8.86	30.60	17.59	8.84	30.54	17.53	8.89
19	QPSK/20.0	30.63	17.60	8.86	30.75	17.74	8.85	30.66	17.66	8.89
20	QPSK/20.0	30.62	17.63	8.45	30.76	17.75	8.82	30.74	17.70	8.88
21	QPSK/20.0	30.22	17.17	8.84	30.17	17.19	8.83	30.28	17.25	8.89
22	QPSK/20.0	30.83	17.81	8.85	30.86	17.78	8.83	30.98	17.90	8.88
23	QPSK/20.0	30.56	17.55	8.86	30.55	17.55	8.84	30.55	17.53	8.90
24	QPSK/20.0	30.55	17.56	8.87	30.57	17.52	8.84	30.63	17.57	8.89
25	QPSK/20.0	30.87	17.77	8.86	31.02	18.01	8.84	30.97	17.95	8.88
26	QPSK/20.0	30.39	17.36	8.93	30.53	17.53	8.84	30.40	17.45	8.86
27	QPSK/20.0	30.56	17.54	8.90	30.71	17.72	8.83	30.51	17.47	8.87
28	QPSK/20.0	30.55	17.56	8.86	30.69	17.68	8.84	30.47	17.46	8.88
29	QPSK/20.0	30.50	17.47	8.87	30.64	17.62	8.83	30.64	17.63	8.88
30	QPSK/20.0	30.68	17.67	8.84	30.75	17.71	8.84	30.74	17.74	8.86
31	QPSK/20.0	30.40	17.37	8.86	30.43	17.40	8.83	30.48	17.47	8.89
32	QPSK/20.0	30.24	17.27	8.88	30.48	17.45	8.83	30.39	17.39	8.89
Total Power 1-32		45.49	32.47	-	45.61	32.59	-	45.60	32.58	-
Total Power 1-32 +23 dBi		68.49	55.47	-	68.61	55.59	-	68.60	55.58	-



Port	Modulation/ Carrier Bandwidth (MHz)	NR Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
33	QPSK/20.0	30.29	17.27	8.84	30.37	17.37	8.84	30.31	17.30	8.88
34	QPSK/20.0	30.25	17.24	8.83	30.36	17.35	8.82	30.28	17.28	8.87
35	QPSK/20.0	30.14	17.12	8.87	30.41	17.40	8.87	30.27	17.26	8.89
36	QPSK/20.0	30.32	17.31	8.85	30.43	17.38	8.81	30.41	17.39	8.90
37	QPSK/20.0	30.52	17.46	8.85	30.51	17.51	8.85	30.53	17.51	8.89
38	QPSK/20.0	30.33	17.30	8.81	30.46	17.46	8.80	30.43	17.42	8.90
39	QPSK/20.0	30.36	17.34	8.85	30.55	17.47	8.84	30.51	17.49	8.89
40	QPSK/20.0	30.43	17.43	8.86	30.48	17.43	8.88	30.46	17.45	8.90
41	QPSK/20.0	30.38	17.32	8.86	30.51	17.50	8.83	30.45	17.43	8.90
42	QPSK/20.0	30.27	17.26	8.90	30.47	17.46	8.79	30.36	17.35	8.87
43	QPSK/20.0	30.39	17.37	8.85	30.52	17.51	8.83	30.44	17.43	8.87
44	QPSK/20.0	30.28	17.25	8.91	30.53	17.52	8.91	30.46	17.45	8.88
45	QPSK/20.0	30.63	17.62	8.87	30.67	17.66	8.83	30.66	17.64	8.87
46	QPSK/20.0	30.65	17.62	8.80	30.63	17.64	8.79	30.71	17.71	8.88
47	QPSK/20.0	30.55	17.49	8.86	30.54	17.53	8.84	30.41	17.40	8.90
48	QPSK/20.0	30.63	17.64	8.83	30.61	17.60	8.83	30.55	17.55	8.89
49	QPSK/20.0	30.71	17.71	8.84	30.71	17.68	8.86	30.63	17.62	8.86
50	QPSK/20.0	30.60	17.59	8.89	30.67	17.67	8.82	30.72	17.71	8.89
51	QPSK/20.0	30.25	17.24	8.85	30.48	17.47	8.87	30.34	17.33	8.85
52	QPSK/20.0	30.60	17.59	8.88	30.78	17.77	8.85	30.60	17.58	8.86
53	QPSK/20.0	30.63	17.65	8.85	30.78	17.78	8.83	30.77	17.77	8.85
54	QPSK/20.0	30.65	17.63	8.83	30.77	17.76	8.83	30.82	17.80	8.86
55	QPSK/20.0	30.78	17.77	8.87	31.10	18.09	8.83	30.93	17.93	8.88
56	QPSK/20.0	30.77	17.75	8.88	31.00	17.97	8.88	30.92	17.87	8.87
57	QPSK/20.0	30.36	17.35	8.85	30.49	17.48	8.84	30.45	17.44	8.88
58	QPSK/20.0	30.07	17.09	8.85	30.40	17.39	8.83	30.33	17.32	8.87
59	QPSK/20.0	30.22	17.20	8.86	30.39	17.38	8.84	30.20	17.19	8.88
60	QPSK/20.0	30.27	17.26	8.84	30.25	17.24	8.80	30.26	17.24	8.88
61	QPSK/20.0	30.41	17.43	8.85	30.69	17.57	8.85	30.51	17.51	8.87
62	QPSK/20.0	30.33	17.30	8.91	30.55	17.54	8.80	30.49	17.48	8.88
63	QPSK/20.0	30.73	17.73	8.85	30.86	17.84	8.83	30.83	17.84	8.87
64	QPSK/20.0	30.21	17.18	8.86	30.35	17.35	8.78	30.27	17.27	8.88
Total Power 33-64		45.49	32.48	-	45.63	32.61	-	45.57	32.55	-
Total Power 33-64 +23 dBi		68.49	55.48	-	68.63	55.61	-	68.57	55.55	-
EIRP		71.50	58.49	-	71.63	58.61	-	71.60	58.58	-



Port	Modulation/ Carrier Bandwidth (MHz)	NR Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
55	64QAM/20.0	31.14	18.13	8.40	31.53	18.52	8.55	31.57	18.56	8.50
55	256QAM/20.0	31.56	18.55	8.47	31.55	18.54	8.56	31.59	18.58	8.58



Configuration NR-MIMO-1C-40

Maximum Output Power 33.98dBm per port

Port	Modulation/ Carrier Bandwidth (MHz)	NR Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
1	QPSK/40.0	33.54	17.53	8.26	33.56	17.55	8.30	33.57	17.55	8.29
2	QPSK/40.0	33.52	17.50	8.27	33.52	17.53	8.31	33.56	17.55	8.30
3	QPSK/40.0	33.55	17.53	8.26	33.48	17.47	8.31	33.52	17.50	8.28
4	QPSK/40.0	33.42	17.4	8.28	33.48	17.45	8.32	33.52	17.51	8.29
5	QPSK/40.0	33.66	17.64	8.27	33.58	17.54	8.29	33.69	17.67	8.29
6	QPSK/40.0	33.67	17.66	8.29	33.65	17.61	8.30	33.73	17.71	8.30
7	QPSK/40.0	33.63	17.61	8.26	33.63	17.60	8.31	33.62	17.60	8.30
8	QPSK/40.0	33.64	17.63	8.28	33.59	17.56	8.30	33.71	17.69	8.29
9	QPSK/40.0	33.56	17.54	8.32	33.52	17.50	8.30	33.56	17.57	8.30
10	QPSK/40.0	33.59	17.57	8.31	33.57	17.54	8.31	33.68	17.66	8.29
11	QPSK/40.0	33.40	17.38	8.29	33.40	17.38	8.31	33.43	17.42	8.29
12	QPSK/40.0	33.51	17.50	8.29	33.46	17.45	8.31	33.52	17.50	8.29
13	QPSK/40.0	33.85	17.82	8.28	33.81	17.78	8.30	33.91	17.90	8.29
14	QPSK/40.0	33.86	17.85	8.26	33.90	17.88	8.30	34.01	18.01	8.29
15	QPSK/40.0	33.88	17.85	8.28	33.74	17.72	8.31	33.89	17.86	8.29
16	QPSK/40.0	33.75	17.73	8.28	33.76	17.75	8.31	33.90	17.87	8.30
17	QPSK/40.0	33.89	17.86	8.27	33.70	17.68	8.31	33.75	17.73	8.29
18	QPSK/40.0	33.62	17.60	8.27	33.63	17.57	8.31	33.70	17.69	8.29
19	QPSK/40.0	33.87	17.83	8.27	33.85	17.82	8.31	33.89	17.87	8.29
20	QPSK/40.0	33.90	17.89	8.27	33.75	17.73	8.31	33.90	17.88	8.30
21	QPSK/40.0	33.46	17.44	8.27	33.40	17.26	8.31	33.51	17.52	8.31
22	QPSK/40.0	34.12	18.10	8.28	34.02	18.00	8.31	34.16	18.13	8.31
23	QPSK/40.0	33.83	17.83	8.28	33.72	17.71	8.30	33.87	17.84	8.29
24	QPSK/40.0	33.82	17.79	8.27	33.74	17.73	8.31	33.90	17.88	8.28
25	QPSK/40.0	34.20	18.17	8.27	34.10	18.08	8.31	34.21	18.18	8.28
26	QPSK/40.0	33.67	17.65	8.27	33.66	17.64	8.30	33.75	17.73	8.29
27	QPSK/40.0	33.86	17.84	8.27	33.93	17.91	8.31	33.89	17.88	8.28
28	QPSK/40.0	33.77	17.75	8.27	33.76	17.75	8.31	33.90	17.88	8.28
29	QPSK/40.0	33.84	17.83	8.27	33.75	17.73	8.31	33.95	17.93	8.29
30	QPSK/40.0	33.97	17.95	8.27	33.91	17.88	8.31	34.03	18.01	8.29
31	QPSK/40.0	33.74	17.71	8.27	33.67	17.65	8.31	33.78	17.76	8.29
32	QPSK/40.0	33.67	17.67	8.27	33.77	17.71	8.31	33.81	17.79	8.29
Total Power 1-32		48.78	32.76	-	48.74	32.72	-	48.83	32.81	-
Total Power 1-32 +23 dBi		71.78	55.76	-	71.74	55.72	-	71.83	55.81	-



Port	Modulation/ Carrier Bandwidth (MHz)	NR Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
33	QPSK/40.0	33.55	17.52	8.27	33.54	17.53	8.31	33.58	17.57	8.29
34	QPSK/40.0	33.58	17.56	8.27	33.51	17.49	8.31	33.68	17.66	8.30
35	QPSK/40.0	33.59	17.57	8.27	33.43	17.40	8.31	33.58	17.56	8.29
36	QPSK/40.0	33.65	17.64	8.27	33.62	17.60	8.32	33.66	17.64	8.29
37	QPSK/40.0	33.76	17.74	8.27	33.70	17.68	8.33	33.75	17.73	8.29
38	QPSK/40.0	33.72	17.70	8.27	33.67	17.65	8.32	33.69	17.67	8.30
39	QPSK/40.0	33.69	17.64	8.27	33.68	17.66	8.31	33.72	17.70	8.30
40	QPSK/40.0	33.66	17.67	8.27	33.68	17.63	8.31	33.75	17.73	8.30
41	QPSK/40.0	33.80	17.78	8.26	33.75	17.73	8.32	33.65	17.63	8.28
42	QPSK/40.0	33.68	17.65	8.28	33.64	17.62	8.31	33.70	17.68	8.30
43	QPSK/40.0	33.75	17.71	8.28	33.64	17.62	8.31	33.76	17.73	8.29
44	QPSK/40.0	33.55	17.53	8.28	33.59	17.57	8.31	33.73	17.71	8.30
45	QPSK/40.0	33.80	17.76	8.27	33.71	17.71	8.31	33.82	17.80	8.29
46	QPSK/40.0	33.79	17.78	8.27	33.70	17.67	8.31	33.91	17.88	8.29
47	QPSK/40.0	33.76	17.78	8.26	33.70	17.68	8.31	33.81	17.80	8.30
48	QPSK/40.0	33.79	17.77	8.27	33.71	17.69	8.31	33.88	17.88	8.30
49	QPSK/40.0	33.93	17.89	8.27	33.84	17.80	8.31	33.84	17.82	8.29
50	QPSK/40.0	33.78	17.75	8.27	33.60	17.58	8.31	33.75	17.73	8.29
51	QPSK/40.0	33.52	17.50	8.27	33.45	17.42	8.31	33.52	17.50	8.29
52	QPSK/40.0	33.86	17.84	8.27	33.83	17.81	8.31	33.77	17.75	8.29
53	QPSK/40.0	33.86	17.84	8.27	33.78	17.77	8.31	33.90	17.88	8.29
54	QPSK/40.0	33.85	17.82	8.27	33.95	17.93	8.33	34.01	17.99	8.29
55	QPSK/40.0	33.95	17.94	8.26	34.11	18.10	8.32	34.00	17.98	8.29
56	QPSK/40.0	33.89	17.87	8.27	33.96	17.93	8.31	33.89	17.87	8.29
57	QPSK/40.0	33.45	17.43	8.27	33.46	17.44	8.31	33.46	17.43	8.28
58	QPSK/40.0	33.44	17.42	8.26	33.39	17.37	8.31	33.47	17.44	8.29
59	QPSK/40.0	33.36	17.34	8.27	33.43	17.41	8.32	33.33	17.30	8.30
60	QPSK/40.0	33.52	17.49	8.27	33.34	17.32	8.32	33.43	17.41	8.30
61	QPSK/40.0	33.63	17.60	8.26	33.59	17.58	8.33	33.49	17.46	8.28
62	QPSK/40.0	33.50	17.48	8.27	33.49	17.47	8.30	33.50	17.48	8.30
63	QPSK/40.0	33.82	17.80	8.27	33.88	17.85	8.32	33.83	17.81	8.29
64	QPSK/40.0	33.29	17.25	8.27	33.38	17.37	8.31	33.41	17.39	8.31
Total Power 33-64		48.73	32.71	-	48.70	32.68	-	48.75	32.73	-
Total Power 33-64 +23 dBi		71.73	55.71	-	71.70	55.68	-	71.75	55.73	-
EIRP		74.77	58.75	-	74.73	58.71	-	74.80	58.78	-



Maximum Output Power 33.98dBm per port

Port	Modulation/ Carrier Bandwidth (MHz)	NR Output Power / Peak to Average Ratio (PAR)								
		Channel position B			Channel position M			Channel position T		
		POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)	POWER (dBm)	POWER (dBm/MHz)	PAR (db)
25	64QAM/40.0	34.18	18.16	8.35	34.06	18.04	8.42	34.12	18.09	8.43
25	256QAM/40.0	34.16	18.14	8.34	34.05	18.03	8.40	34.09	18.07	8.41

A.2 Occupied Bandwidth

A.2.1 Reference

FCC CFR 47 Part 2, Clause 2.1049

FCC CFR 47 Part 27, Clause 27.53 (m)

A.2.2 Method of Measurements

The EUT was set to transmit at maximum power and testing was carried out on bottom, middle and top channels. Using the Occupied Bandwidth measurement function in the spectrum analyzer, the 26dB bandwidth was measured in accordance with FCC KDB 971168 D01 Clause 4.2.

The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

A.2.3 Measurement result

Configuration LTE+NR-MIMO-MC-10 (1LTE+1NR)


-26dBc Occupied Bandwidth, Port 8, LTE 20.0M

Port	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
8	QPSK / 20.0 MHz	18.46	18.46	18.46
8	16QAM / 20.0 MHz	18.62	18.49	18.55
8	64QAM / 20.0 MHz	18.65	18.45	18.60
8	256QAM / 20.0 MHz	18.58	18.51	18.59


99% Occupied Bandwidth, Port 8, LTE 20.0M

Port	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
8	QPSK / 20.0 MHz	17.607	17.610	17.605
8	16QAM / 20.0 MHz	17.787	17.686	17.800
8	64QAM / 20.0 MHz	17.831	17.667	17.836
8	256QAM / 20.0 MHz	17.813	17.673	17.840


Port 8, QPSK 20.0M Channel position B, LTE

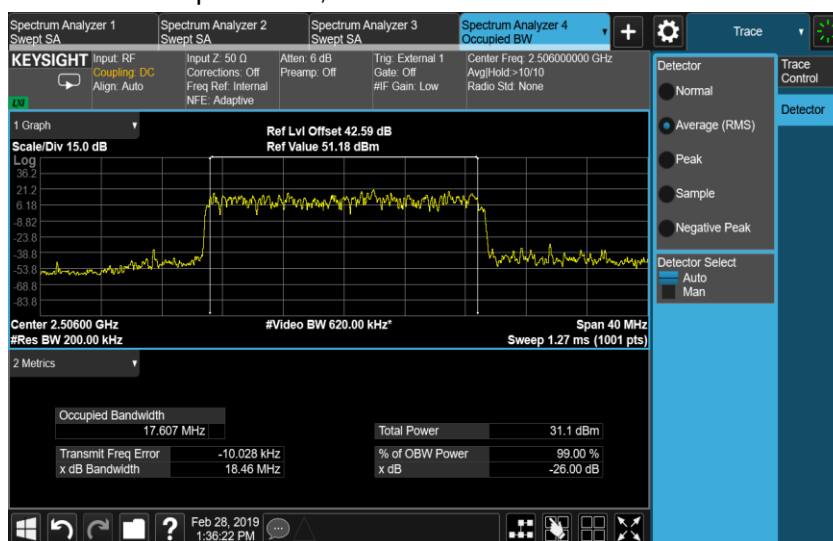


Port 8, QPSK 20.0M Channel position M, LTE

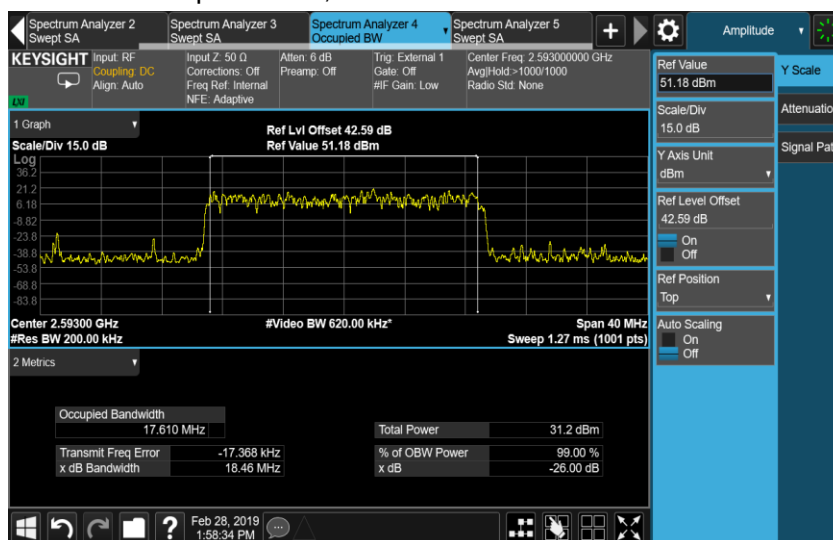


Port 8, QPSK 20.0M Channel position T, LTE

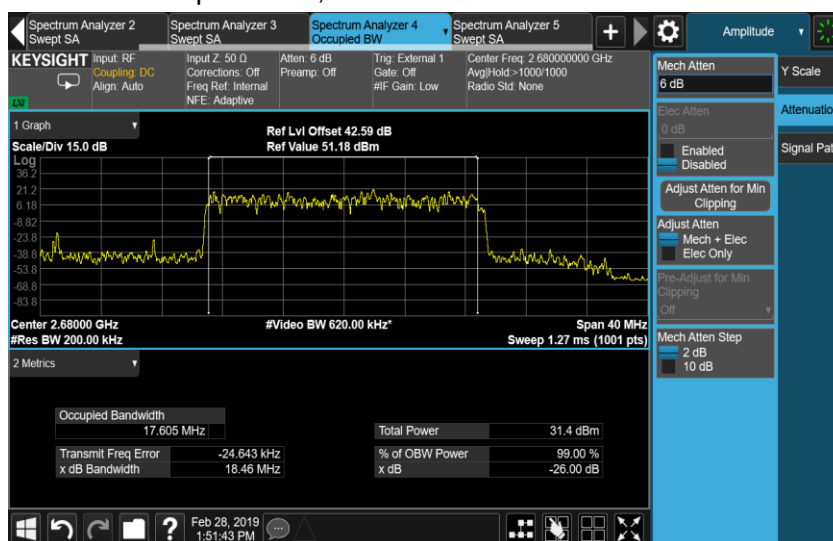


Port 8, 16QAM 20.0M Channel position B, LTE

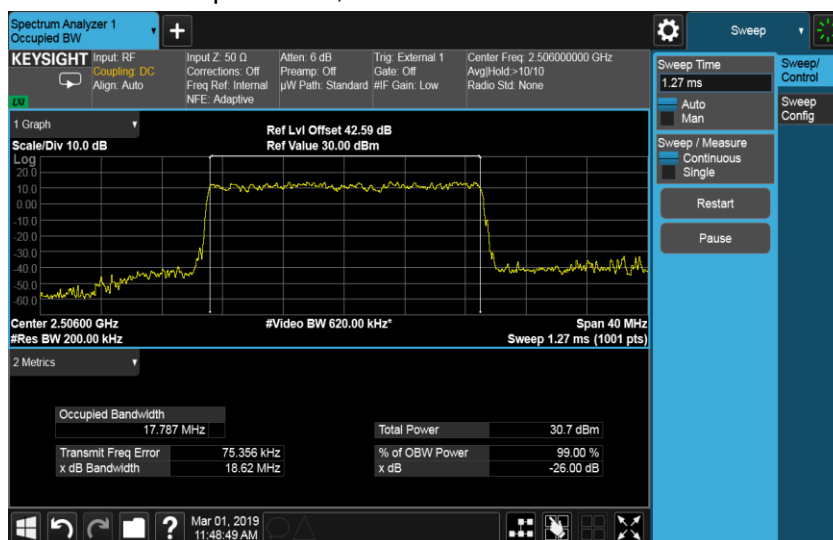


Port 8, 16QAM 20.0M Channel position M, LTE

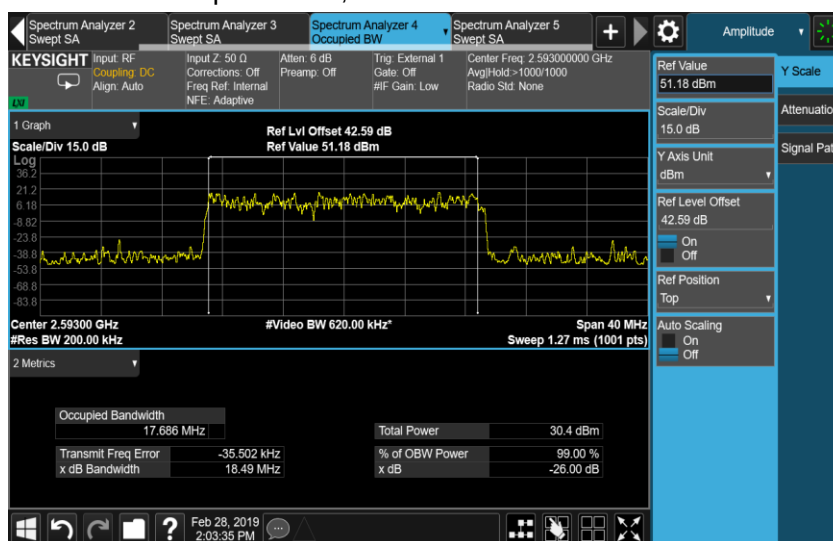


Port 8, 16QAM 20.0M Channel position T, LTE

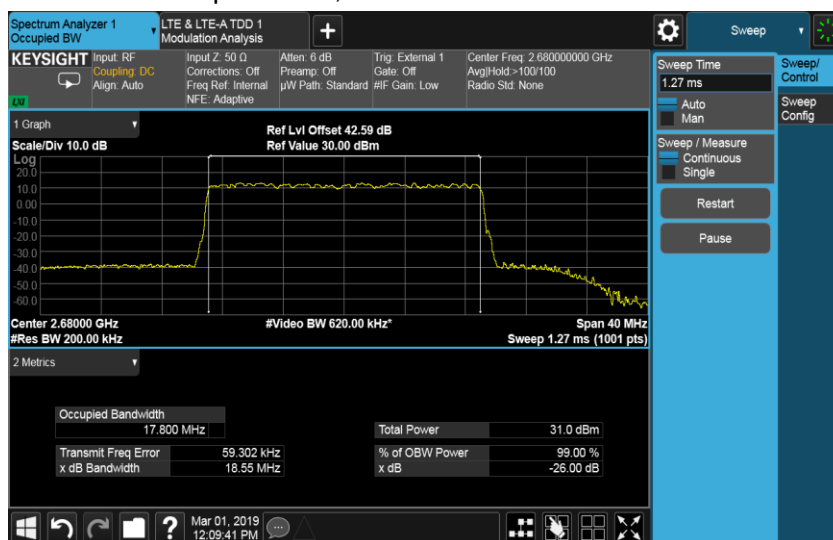


Port 8, 64QAM 20.0M Channel position B, LTE

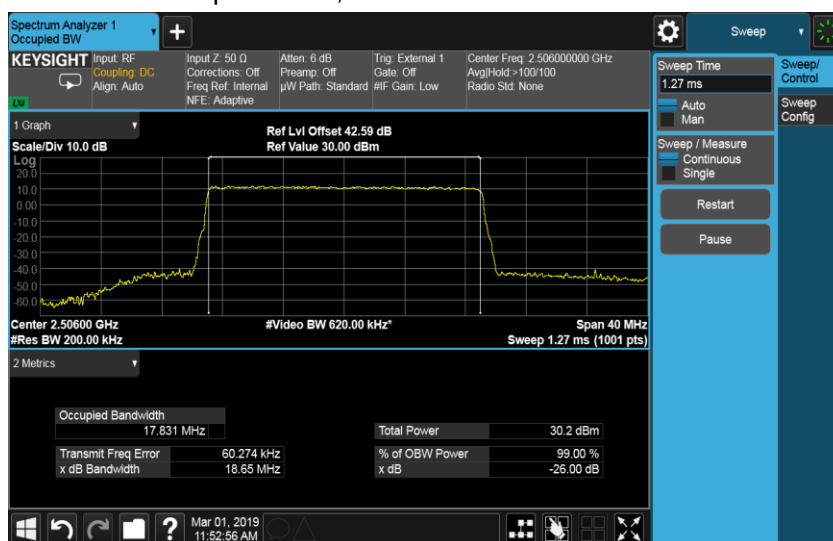


Port 8, 64QAM 20.0M Channel position M, LTE

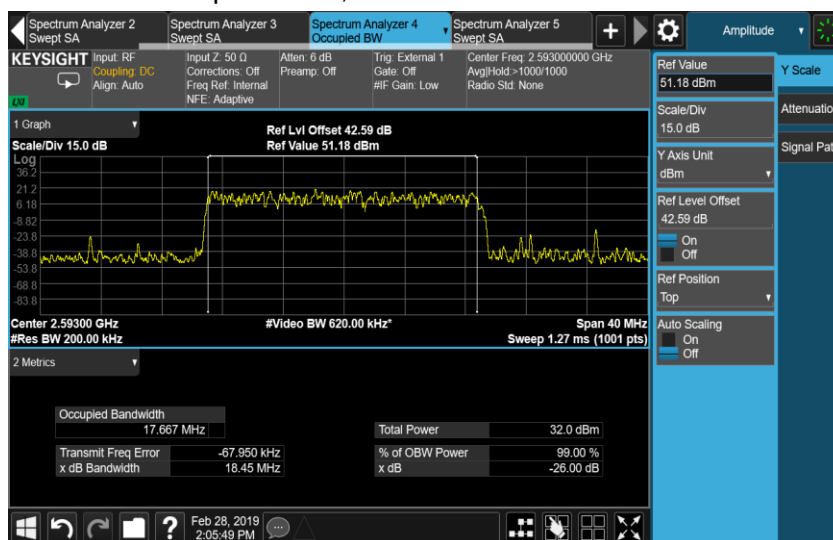


Port 8, 64QAM 20.0M Channel position T, LTE

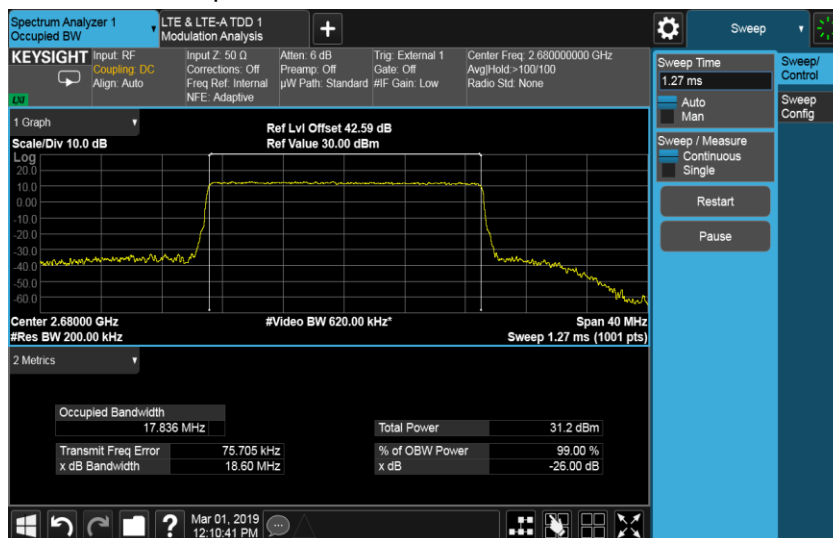


Port 8, 256QAM 20.0M Channel position B, LTE

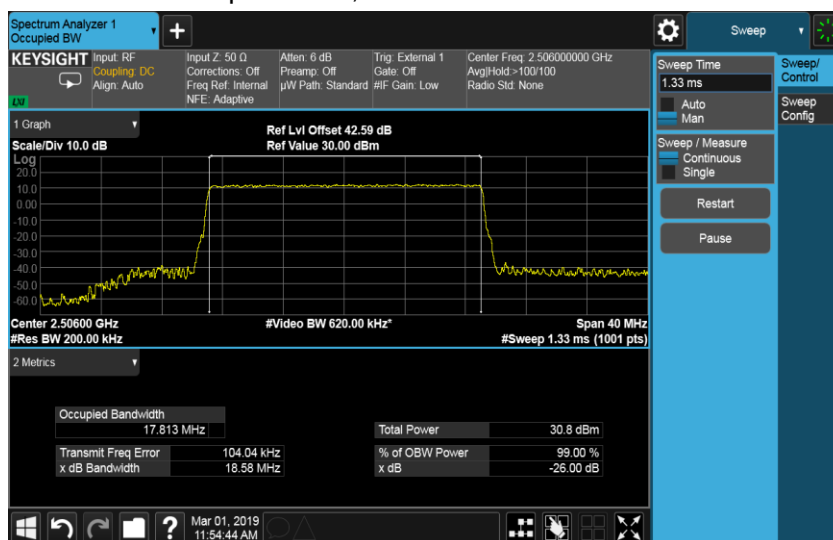

Port 8, 256QAM 20.0M Channel position M, LTE

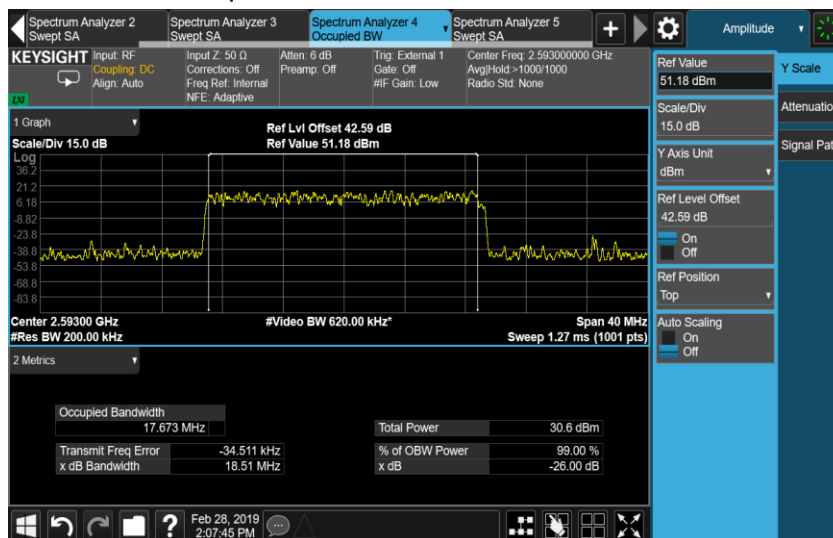

Port 8, 256QAM 20.0M Channel position T, LTE

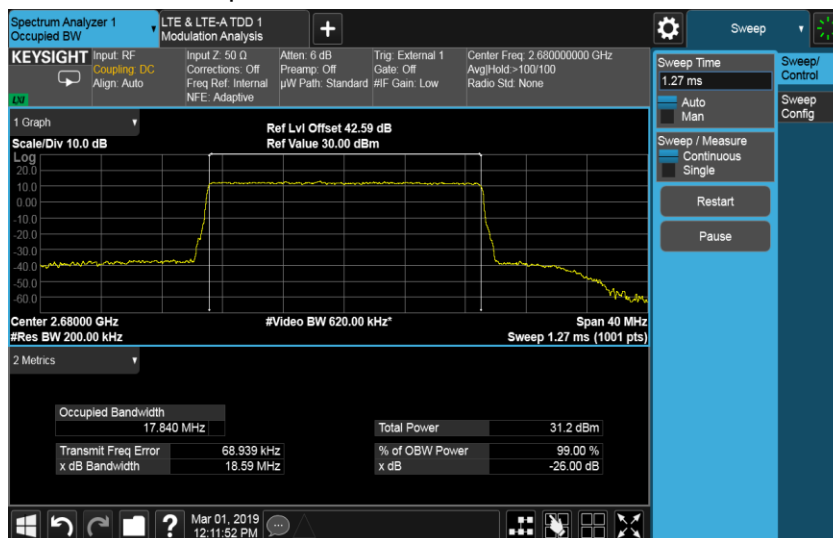

Configuration NR-MIMO-1C-20
-26dBc Occupied Bandwidth

Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
55	QPSK/ 20.0 MHz	18.67	18.67	18.67

-26dBc Occupied Bandwidth

Antenna	Bandwidth	Occupied Bandwidth (MHz)	
		Modulation 64QAM/ Channel Position M	Modulation 256QAM/ Channel Position M
55	20.0 MHz	18.77	18.59


99% Occupied Bandwidth

Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
55	QPSK/ 20.0 MHz	17.976	18.050	18.059


99% Occupied Bandwidth

Antenna	Bandwidth	Occupied Bandwidth (MHz)	
		Modulation 64QAM/ Channel Position M	Modulation 256QAM/ Channel Position M
55	20.0 MHz	18.090	18.087


Port 55, QPSK 20.0M Channel position B

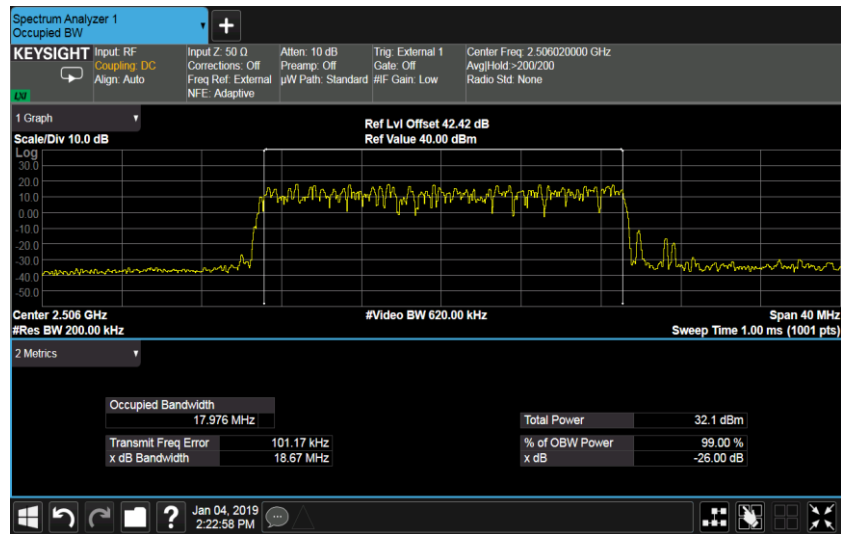


Port 55, QPSK 20.0M Channel position M

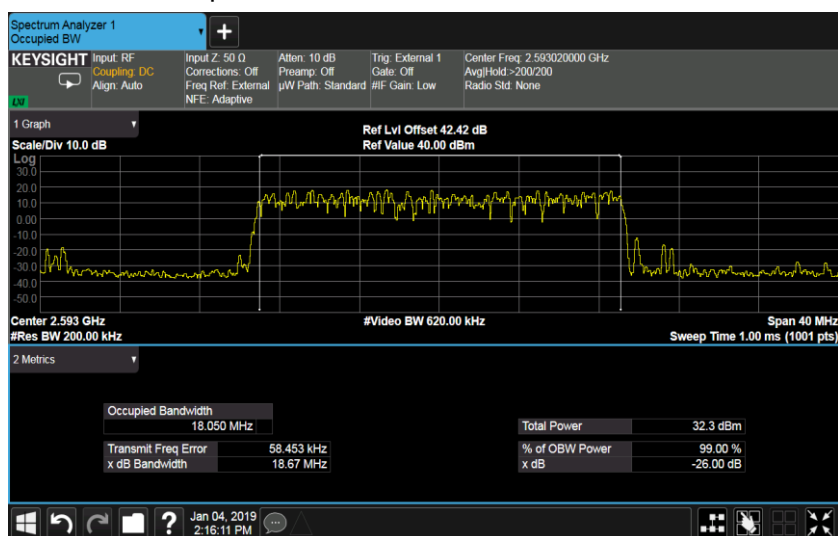


Port 55, QPSK 20.0M Channel position T

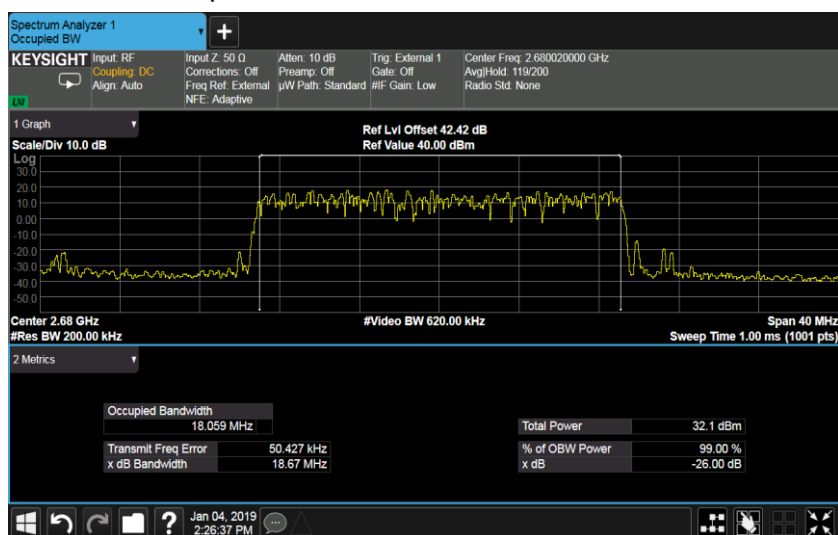

Port 55, 64QAM 20.0M Channel position M

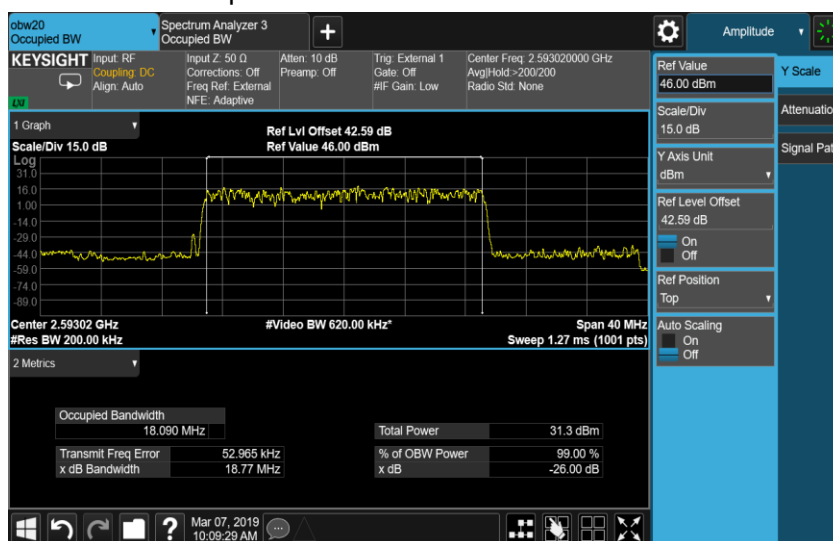

Port 55, 256QAM 20.0M Channel position M

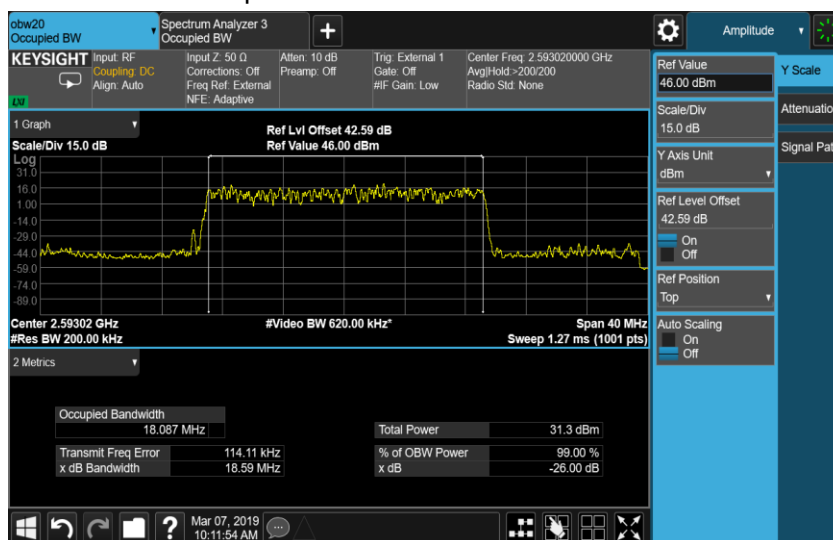

Configuration NR-MIMO-1C-40
-26dBc Occupied Bandwidth

Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
25	QPSK/ 40.0 MHz	38.79	39.06	38.96

-26dBc Occupied Bandwidth

Antenna	Bandwidth	Occupied Bandwidth (MHz)	
		Modulation 64QAM/ Channel Position M	Modulation 256QAM/ Channel Position M
25	40.0 MHz	38.80	39.03


99% Occupied Bandwidth

Antenna	Modulation / Bandwidth	Occupied Bandwidth (MHz)		
		Channel Position B	Channel Position M	Channel Position T
25	QPSK/ 40.0 MHz	37.769	37.788	37.756


99% Occupied Bandwidth

Antenna	Bandwidth	Occupied Bandwidth (MHz)	
		Modulation 64QAM/ Channel Position M	Modulation 256QAM/ Channel Position M
25	40.0 MHz	37.447	37.681


Port 25, QPSK 40.0M Channel position B

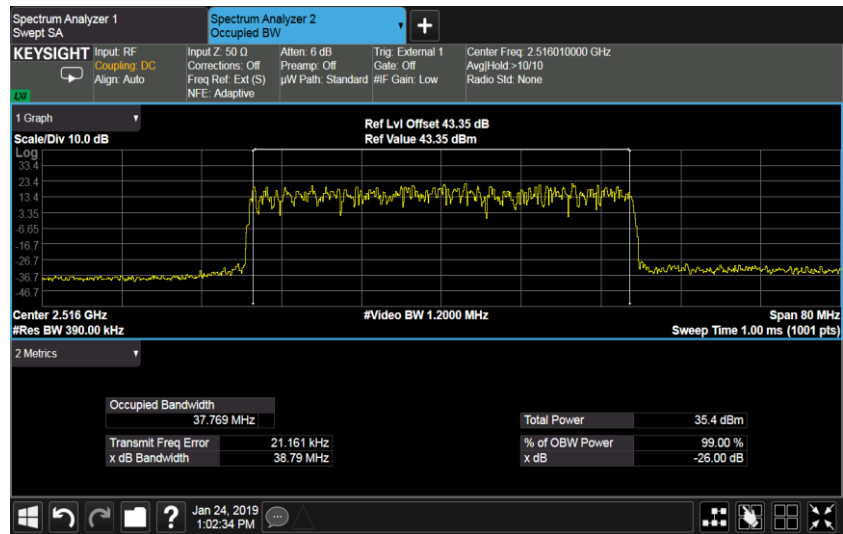


Port 25, QPSK 40.0M Channel position M

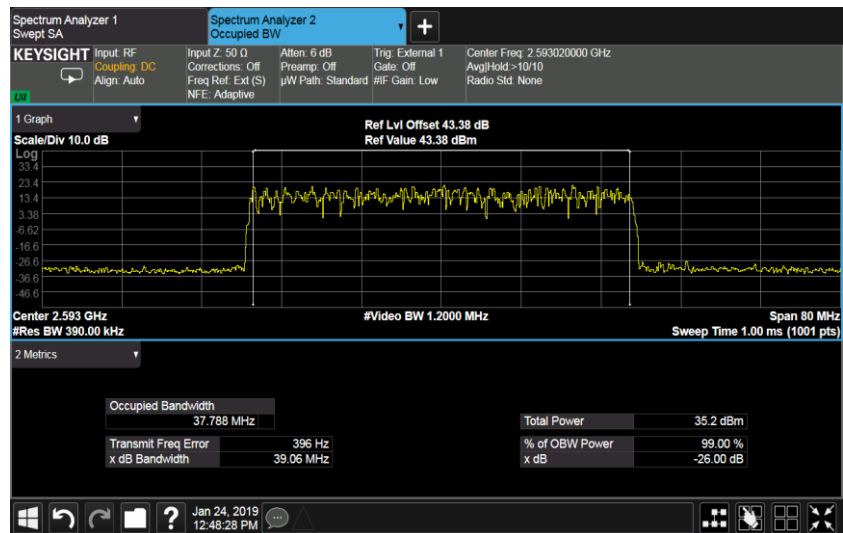

Port 25, QPSK 40.0M Channel position T

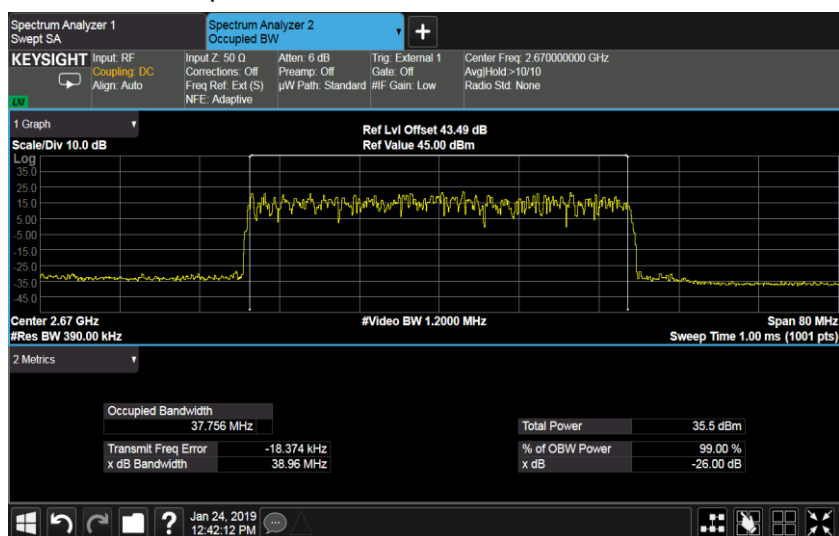


Port 25, 64QAM 40.0M Channel Position M

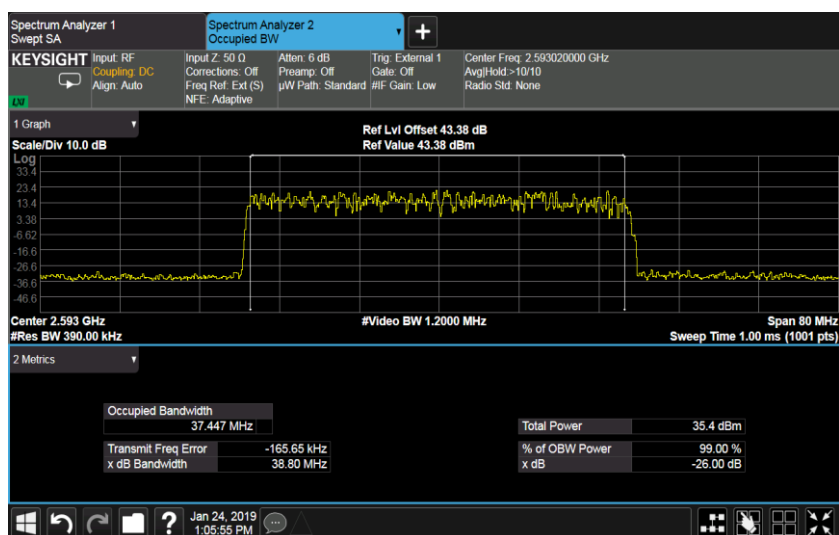



Port 25, 256QAM 40.0M Channel Position M

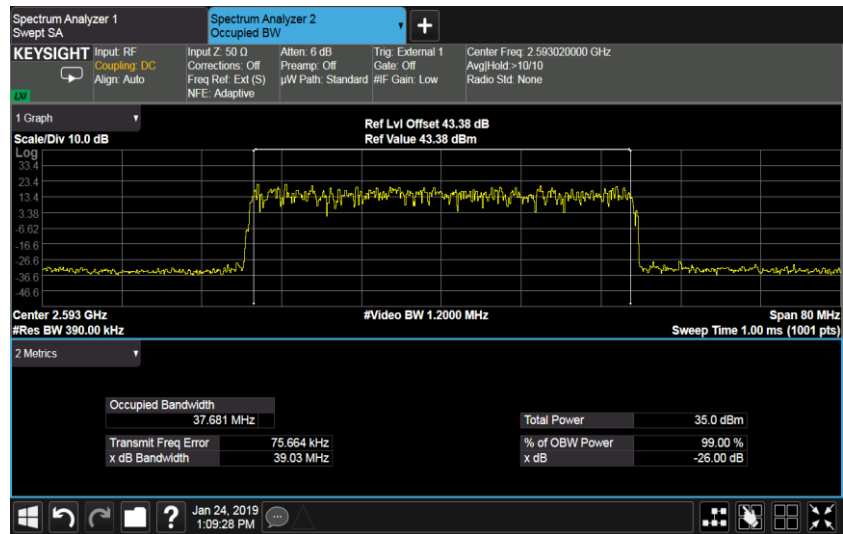

A.3 Spurious Emissions at Band Edge

A.3.1 Reference

FCC CFR 47 Part 2, Clause 2.1051

FCC CFR 47 Part 27, Clause 27.53(m)

A.3.2 Method of measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

For MIMO mode configurations, the limit was adjusted with a correction of -18.06dB [$10\log(1/64)$] by using the Measure and Add $10\log(N)$ dB technique according to KDB 662911 D01 Multiple Transmitter Output accounting for simultaneous transmission from antenna ports . Then the limit was adjusted to -31.06dBm.

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed and a RBW of 1MHz for measurements of emissions > 1MHz away from the band edges.

The limit was adjusted with -13.01dB [$10\log(50/1000)$] to compensate for the reduced measurement bandwidth 50KHz for emission more than 1MHz away from the band edges. For MIMO mode, the limit of -44.07dBm was used for emission more than 1MHz away from the band edges. Spectrum analyzer detector was set as RMS.

A.3.3 Measurement limit



The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

A.3.4 Measurement result



Configuration LTE+NR-MIMO-MC-1-BE (1LTE QPSK + 1NR QPSK)

Band Edge Frequency	Channel Bandwidth	RBW(KHz)	Limit(dBm)
Channel Position B 2496.0MHz	LTE 20.0 MHz	200	-31.06
	NR 40.0 MHz	50	-44.07
Channel Position T 2690.0MHz	LTE 20.0 MHz	200	-31.06
	NR 40.0 MHz	50	-44.07

Port 8, Channel Position B, LTE

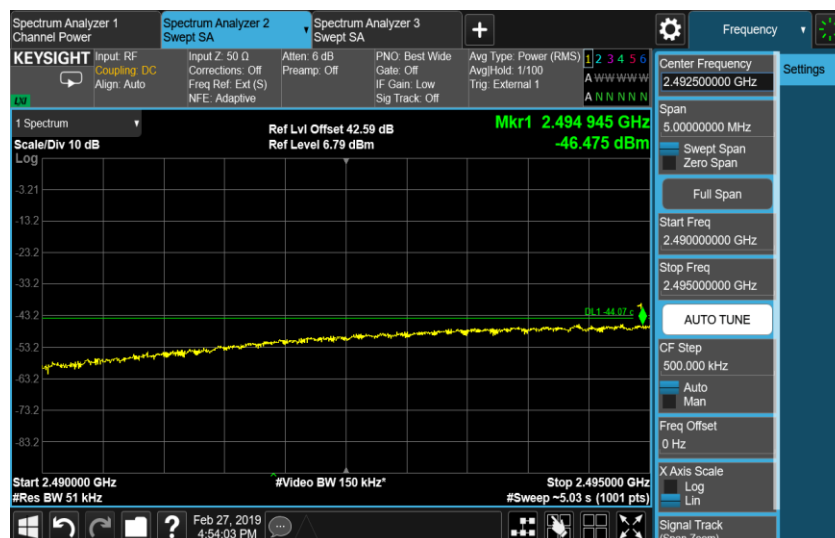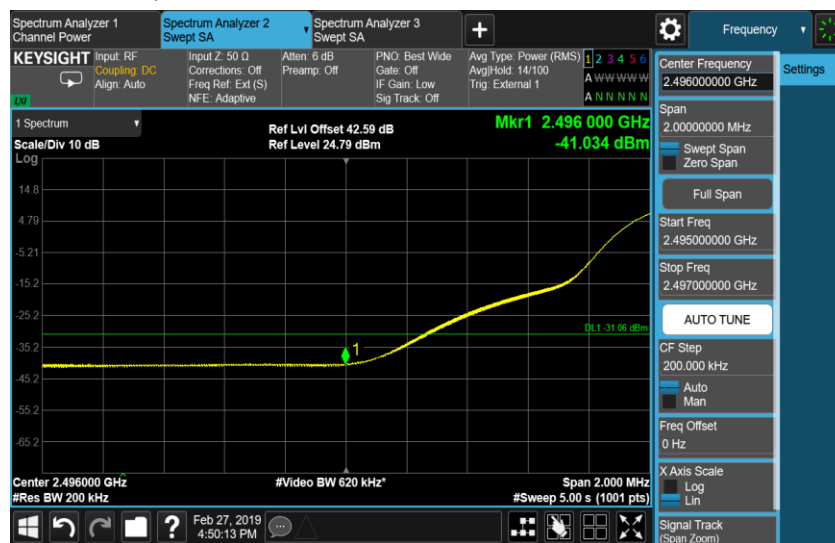


Port 8, Channel Position T, LTE

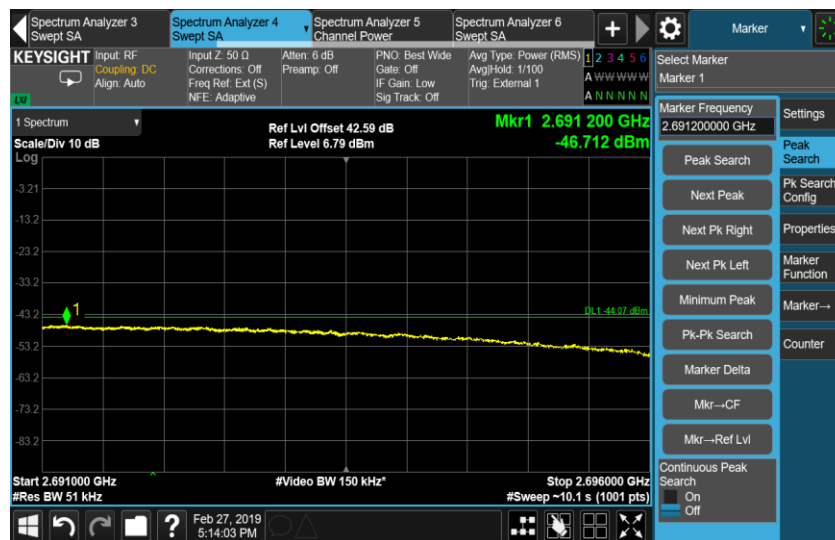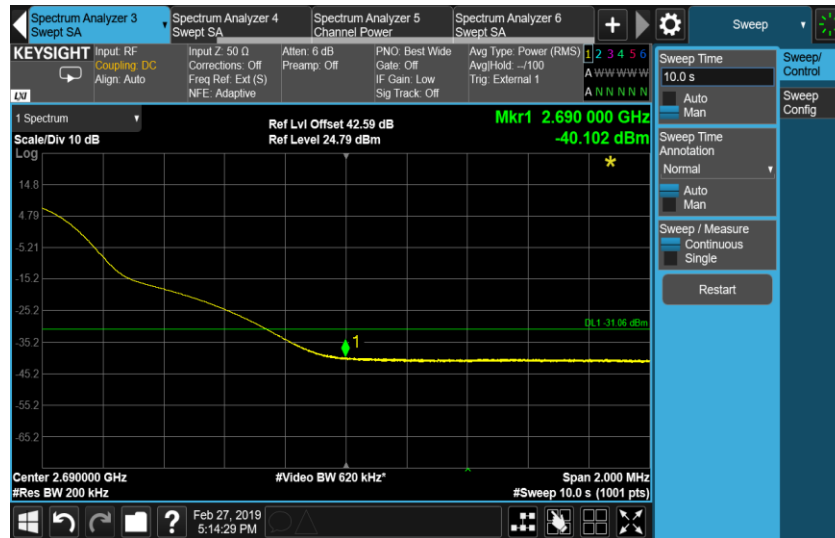


Configuration LTE+NR-MIMO-MC-2-BE (2LTE QPSK + 1NR QPSK)

Band Edge Frequency	Channel Bandwidth	RBW(KHz)	Limit(dBm)
Channel Position B 2496.0MHz	LTE 20.0 MHz	200	-31.06
	NR 40.0 MHz	50	-44.07
Channel Position T 2690.0MHz	LTE 20.0 MHz	200	-31.06
	NR 40.0 MHz	50	-44.07

Port 8, Channel Position B, LTE

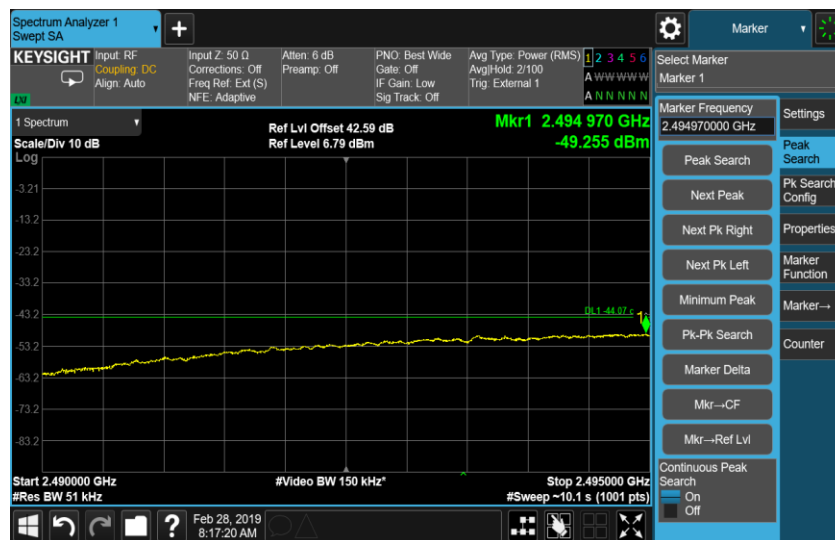

Port 8, Channel Position T, LTE

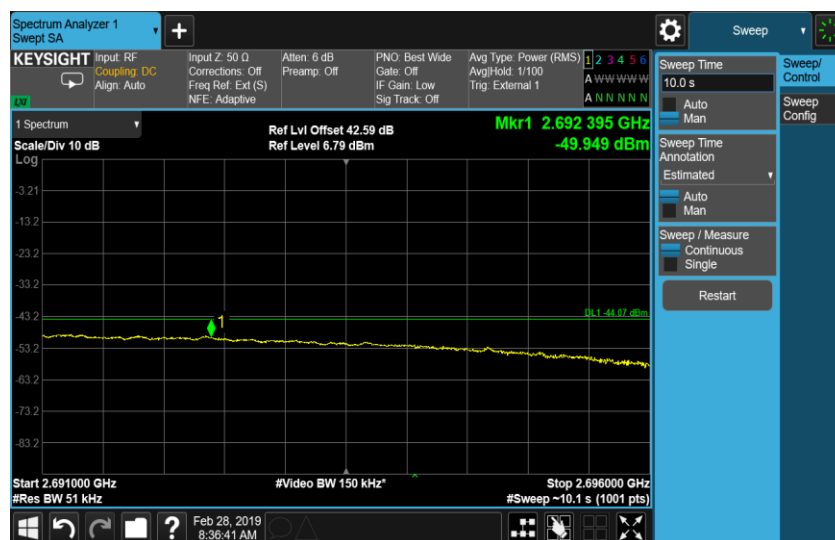

Configuration LTE+NR-MIMO-MC-3-BE (3LTE QPSK + 1NR QPSK)

Band Edge Frequency	Channel Bandwidth	RBW(KHz)	Limit(dBm)
Channel Position B 2496.0MHz	LTE 20.0 MHz	200	-31.06
	NR 40.0 MHz	50	-44.07
Channel Position T 2690.0MHz	LTE 20.0 MHz	200	-31.06
	NR 40.0 MHz	50	-44.07

Port 8, Channel Position B, LTE

