

Ericsson AB

RF TEST REPORT

Report Type:
FCC Part 27 RF report

PRODUCT NAME:
Radio 4415 B66A

REPORT NUMBER:
230700327SHA-001

ISSUE DATE:
July 7, 2023

DOCUMENT CONTROL NUMBER:
TTRFFCC Part 27_V1 © 2018 Intertek



TEST REPORT

Report no.: 230700327SHA-001

Applicant: Ericsson AB
Isafjordsgatan 10 SE-164 80 Stockholm 16480 Sweden

Manufacturer: Ericsson AB
Isafjordsgatan 10 SE-164 80 Stockholm 16480 Sweden

FCC ID: TA8FKRC161644

IC: 287AB-FS161644

SUMMARY:**The equipment is tested according to the following standard(s) or Specification:****FCC CFR 47 Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES****ISED RSS-139 Issue 4:** Advanced Wireless Services Equipment Operating in the Bands 1710-1780 MHz and 2110-2200 MHz**PREPARED BY:****REVIEWED BY:**

Project Engineer
Victor Yang

Reviewer
Jackson Huang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION	7
1.3 DESCRIPTION OF TEST FACILITY	8
2 TEST SPECIFICATIONS.....	9
2.1 RELATED DOCUMENTS	9
2.2 PRODUCT INFORMATION.....	9
2.3 CONFIGURATION DESCRIPTION.....	10
2.4 TEST SETUP.....	11
2.5 TEST ENVIRONMENT CONDITION:.....	12
2.6 INSTRUMENT LIST	13
2.7 MEASUREMENT UNCERTAINTY	14
3 MAXIMUM OUTPUT POWER AND PEAK TO AVERAGE POWER RATIO AND EIRP	15
3.1 LIMIT	15
3.2 MEASUREMENT PROCEDURE	15
3.3 MEASUREMENT RESULT	16
4 OCCUPIED BANDWIDTH	19
4.1 MEASUREMENT PROCEDURE	19
4.2 MEASUREMENT RESULT	20
5 UNWANTED EMISSIONS AT BAND EDGE	27
5.1 LIMIT	27
5.2 MEASUREMENT PROCEDURE	27
5.3 MEASUREMENT RESULT	28
6 CONDUCTED UNWANTED EMISSION	37
6.1 LIMIT	37
6.2 MEASUREMENT PROCEDURE	37
6.3 MEASUREMENT RESULT	38
7 FREQUENCY STABILITY.....	73
7.1 LIMIT	73
7.2 MEASUREMENT PROCEDURE	73
7.3 MEASUREMENT RESULT	74

Revision History

Report No.	Version	Description	Issued Date
230700327SHA-001	Rev. 01	Initial issue of report	July 7, 2023

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Max Output Power and Peak to Average Power Ratio and EIRP	27.50(d)	RSS-139 5.5	Pass
Occupied Bandwidth	27.53(h) 2.1049	RSS-GEN 6.7	Pass
Unwanted Emissions at Band Edge	27.53(h)	RSS-139 5.6	Pass
Conducted Unwanted Emission	27.53(h)	RSS-139 5.6	Pass
Frequency Stability	27.54	RSS-139 5.4	Pass

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Description:	Remote Radio Unit
Product name:	Radio 4415 B66A
Product number:	KRC 161 644/1, KRC 161 644/3
HVIN	FS1616441, FS1616443
Serial Number(s)	D827212466
Rating:	-48V DC
Software Version:	PIS: CXP9013268/15_R95BG, UP: CXP9024418/15_R77A142
Hardware Version:	R5B
Sample received date:	June 28, 2023
Date of test:	June 28, 2023 ~ July 4, 2023

TEST REPORT

1.2 Technical Specification

Frequency Range:	TX: 2110-2180 MHz, RX: 1710-1780 MHz
Number of Antenna ports:	4 TX/RX
Supported RAT:	SR/MR: WCDMA, LTE, NR
Max RF bandwidth (IBW):	70 MHz
Supported Number of Carriers:	Maximum 6 carriers per port
Supported modulation:	WCDMA: QPSK, 16QAM, 64QAM NR/LTE: QPSK, 16QAM, 64QAM, 256QAM
Supported Channel Bandwidth:	WCDMA: 5MHz LTE: 5, 10, 15, 20 MHz NR: 5, 10, 15, 20, 25, 30, 35, 40 MHz
Declaration output power:	Maximum 40W per port

TEST REPORT

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address 1:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Address 2:	No. 5 Lize East Street, Ericsson Tower, Chaoyang District, Beijing 100102 P.R.C.
Telephone:	+86 21 61278200
Telefax:	+86 21 54262353
The test facility is recognized, certified, or accredited by these organizations:	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Related documents

FCC Part 27 (2021)

FCC Part 2 (2021)

ISED RSS-139 issue 4 September 29, 2022

ISED RSS-Gen issue 5 March 2019 Amendment 1

ANSI C63.26:2015

KDB 971168 D01 v03r01

KDB 662911 D01 v02r01

2.2 Product Information

The Equipment Under Test (EUT) is an Ericsson Radio Unit working in the wireless communications services 2100MHz band which provides communication connections to network in WCDMA/LTE/NR modes and MSR modes. The Radio 4415 B66A operates from a -48V DC.

EUT has 2 variants. KRC 161 644/1 without NEBS cover; KRC 161 644/3 with NEBS cover. We test KRC 161 644/1 as typical model and list the worst data.

The EUT includes 4 TX/RX ports and it can be configured to transmit in MIMO mode, and MIMO mode was used for measurements as the worst configuration. The complete testing was performed with the EUT transmitting at maximum RF power unless otherwise stated.

A full technical description can be found in the Manufacturer's documentation.

TEST REPORT

2.3 Configuration Description

The following settings were used to represent all traffic scenarios. The output power was measured on the bottom, middle and top channel of all applicable antenna ports. By measuring the output power of QPSK, 16QAM, 64QAM, 256QAM on one of the antenna ports, it was determined that QPSK for NR was the worst-case modulation schemes and were used for all testing.

Complete testing was carried out on the worst-case antenna port which was established as being the highest output power from the 4 measured ports on worst case modulation scheme. This antenna port was Port D for all modes.

The settings below were used for all measurements unless otherwise noted:

NR


Configuration	No. of Carriers	NR Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR-1C	1NR	25	2122.5	2145	2167.5
		30	2125	2145	2165
		35	2127.5	2145	2162.5
		40	2130	2145	2160
NR-2C	2NR	25	-	2122.5+2167.5	-
		30	-	2125+2165	-
		35	-	2127.5+2162.5	-

NR

Configuration	No. of Carriers	NR Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)		
			Bottom	Middle	Top
NR-1C-BE	1NR	25	2122.5	-	2167.5
		30	2125	-	2165
		35	2127.5	-	2162.5
		40	2130	-	2160
NR-2C-BE	2NR	25	2122.5+2147.5	-	2142.5+2167.5
		30	2125+2155	-	2135+2165
		35	-	2127.5+2162.5	-

2.4 Test Setup

Conducted Measurement:

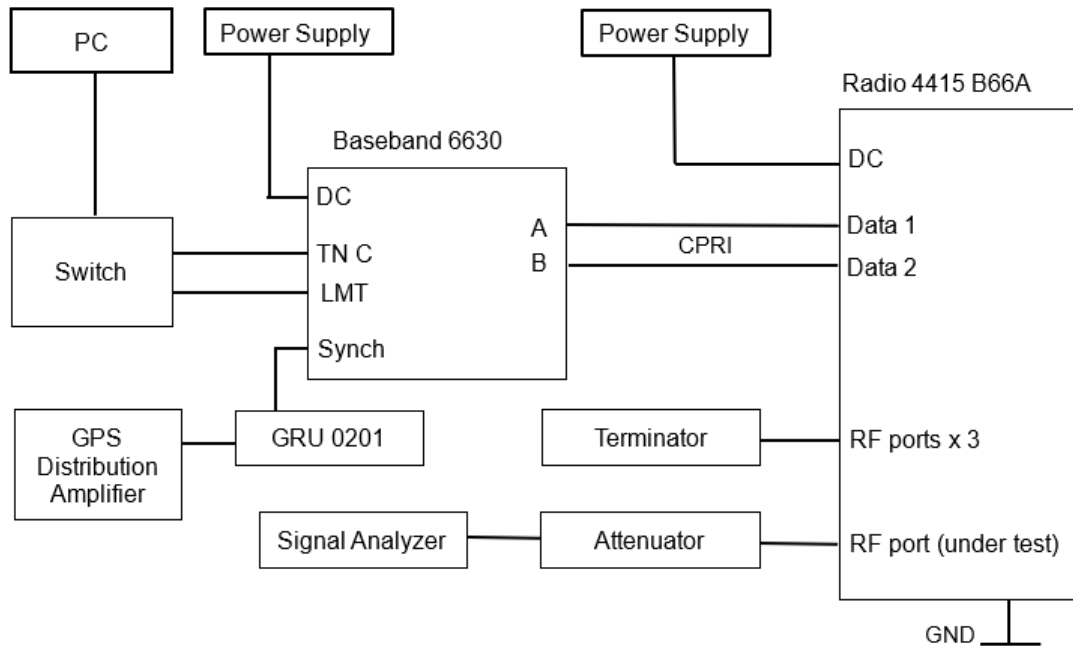

No.	Auxiliary Equipment	Product Number / Model Type	Version
1	PC	PowerEdge R230	-
2	DC Power Supply	N8737A/US23B3304A	-
3	Baseband 6630	KDU 137 848/1	R2H
4	GRU 02 01	NCD 901 41/1	R1D
5	GPS Distribution Amplifier	58536A	-
6	Switch	LS-S5024E-CN	-
7	Terminator	60Z150/01020605006	-
8	Terminator	TF150/11081908	-
9	Terminator	TF150/06081408	-
10	Attenuator	DTS150/18121935	-

TEST REPORT

2.5 Test environment condition:

Test items	Temperature	Humidity
Max Output Power and Peak to Average Power Ratio and EIRP	23°C	54% RH
Occupied Bandwidth		
Unwanted Emissions at Band Edge		
Conducted Unwanted Emission		
Frequency Stability	Please refer to clause 8	

2.6 Instrument list

RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	PXA Signal Analyzer	Keysight	N9030A	EC1046	2024.4.7
☐	Signal Generator	R&S	SMU200A	EC1050	2024.4.2
☒	Climatic Chamber	赛宝	117	EC1052	2023.9.19
☒	Humiture meter	托普	CEEC-WR16H-50W	EC1053	2024.2.21
☐	Power sensor	R&S	TPJ-20	EC1111	2023.7.14
☐	Power sensor	R&S	NRP-Z11	EC1112	2023.7.14
☐	Power meter	R&S	NRP-Z21	EC1113	2023.8.9

TEST REPORT

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum output power	0.73dB
Occupied Bandwidth	0.88%
Unwanted Emissions at Band Edge	3.03dB
Conducted Unwanted Emission	3.03dB
Frequency stability	0.77×10^{-7}

TEST REPORT

3 Maximum Output Power and Peak to Average Power Ratio and EIRP

Test result: Pass

3.1 Limit

Output Power:

FCC (EIRP) 1640 W(62.15dBm) or 3280W(65.16dBm) for emission bandwidth $\leq$ 1MHz

1640 W/MHz(62.15dBm/MHz) or 3280W/MHz(65.16dBm/MHz) for emission bandwidth $>$ 1MHz

IC 65 dBm e.i.r.p./MHz

Peak to Average Ratio: $\leq$ 13 dB

Note: Stricter limit is applied.

3.2 Measurement Procedure

The EUT was configured to transmit on maximum power and proper modulation. The transmitter power shall be measured in terms of a root-mean-square (RMS) average value. In case of the EUT was configured to MIMO mode, since the EUT transmits on all antennas simultaneously in the same frequency range, using the Measure-and-Sum approach, the output power at all antennas were tested, and the total output power were then summed mathematically in linear power units according to FCC KDB 662911 D01.

A peak to average ratio measurement is performed at the conducted ports of the EUT for single carrier for single RAT mode. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) was used and 0.1% probability value recorded.

3.3 Measurement result

NR mode:

NR-1C

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	QPSK	25	45.66	32.27	7.38	45.73	32.20	7.36	45.71	32.34	7.44
B	QPSK	25	45.98	32.57	7.38	45.91	32.53	7.36	45.96	32.57	7.43
C	QPSK	25	45.99	32.57	7.39	45.94	32.56	7.36	45.91	32.53	7.44
D	QPSK	25	46.09	32.80	7.39	46.15	32.74	7.36	46.03	32.58	7.44
Total conducted power			51.95	38.58	-	51.96	38.53	-	51.92	38.53	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
Max antenna gain			-	23.57	-	-	23.62	-	-	23.62	-

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	QPSK	30	45.80	31.64	7.35	45.91	31.62	7.33	45.76	31.56	7.44
B	QPSK	30	46.06	31.88	7.36	46.08	31.82	7.33	45.77	31.73	7.44
C	QPSK	30	46.06	31.86	7.36	45.93	31.78	7.33	45.94	31.81	7.44
D	QPSK	30	46.11	31.94	7.36	46.13	31.93	7.33	46.05	31.91	7.44
Total conducted power			52.03	37.85	-	52.03	37.81	-	51.90	37.77	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
Max antenna gain			-	24.30	-	-	24.34	-	-	24.38	-

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	QPSK	35	45.78	30.81	7.37	45.98	31.09	7.35	45.99	31.02	7.47
B	QPSK	35	45.97	31.14	7.39	45.88	31.04	7.35	46.00	31.08	7.47
C	QPSK	35	45.99	31.10	7.39	45.87	30.97	7.34	46.03	31.06	7.47
D	QPSK	35	46.15	31.28	7.39	46.04	31.14	7.34	46.00	30.80	7.48
Total conducted power			52.00	37.11	-	51.96	37.08	-	52.03	37.01	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
Max antenna gain			-	25.04	-	-	25.07	-	-	25.14	-

TEST REPORT

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	QPSK	40	45.77	30.32	7.38	45.67	30.26	7.36	45.74	30.27	7.51
B	QPSK	40	45.94	30.54	7.37	45.91	30.44	7.35	45.90	30.43	7.50
C	QPSK	40	46.06	30.59	7.40	45.98	30.41	7.36	45.93	30.53	7.51
D	QPSK	40	46.14	30.71	7.39	46.19	30.63	7.35	45.95	30.54	7.50
Total conducted power			52.00	36.56	-	51.96	36.46	-	51.90	36.46	-
EIRP limit			-	62.15	13.00	-	62.15	13.00	-	62.15	13.00
Max antenna gain			-	25.59	-	-	25.69	-	-	25.69	-

NR-2C

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	QPSK	25	-	-	-	45.42	29.06	-	-	-	-
B	QPSK	25	-	-	-	45.61	29.25	-	-	-	-
C	QPSK	25	-	-	-	45.65	29.24	-	-	-	-
D	QPSK	25	-	-	-	45.90	29.44	-	-	-	-
Total conducted power			-	-	-	51.67	35.27	-	-	-	-
EIRP limit			-	-	-	-	62.15	-	-	-	-
Max antenna gain			-	-	-	-	26.88	-	-	-	-

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	QPSK	30	-	-	-	45.57	28.27	-	-	-	-
B	QPSK	30	-	-	-	45.76	28.58	-	-	-	-
C	QPSK	30	-	-	-	45.59	28.45	-	-	-	-
D	QPSK	30	-	-	-	45.72	28.61	-	-	-	-
Total conducted power			-	-	-	51.68	34.50	-	-	-	-
EIRP limit			-	-	-	-	62.15	-	-	-	-
Max antenna gain			-	-	-	-	27.65	-	-	-	-

TEST REPORT

Antenna Port	NR Modulation	NR Carrier Bandwidth (MHz)	Output power / Peak-to-Average Ratio (PAR)								
			Channel position B			Channel position M			Channel position T		
			Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)	Power (dBm)	Power (dBm /MHz)	PAR (dB)
A	QPSK	35	-	-	-	45.59	27.70	-	-	-	-
B	QPSK	35	-	-	-	45.63	27.81	-	-	-	-
C	QPSK	35	-	-	-	45.51	27.75	-	-	-	-
D	QPSK	35	-	-	-	45.69	27.83	-	-	-	-
Total conducted power			-	-	-	51.63	33.79	-	-	-	-
EIRP limit			-	-	-	-	62.15	-	-	-	-
Max antenna gain			-	-	-	-	28.36	-	-	-	-

TEST REPORT**4 Occupied Bandwidth****Test result: Pass****4.1 Measurement Procedure**

The EUT was set to transmit at maximum power and testing was carried out on bottom, middle and top channels. Using the Occupied Bandwidth measurement function in the spectrum analyzer, the 26dB bandwidth was measured in accordance with FCC KDB 971168 D01 Clause 4.2.

The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

TEST REPORT

4.2 Measurement result

NR-1C


99% Occupied Bandwidth

Antenna Port	Modulation	Bandwidth	Occupied Bandwidth (MHz)		
			Channel Position B	Channel Position M	Channel Position T
D	QPSK	25MHz	23.722	23.715	23.744
D	QPSK	30MHz	28.508	28.504	28.523
D	QPSK	35MHz	33.512	33.493	33.495
D	QPSK	40MHz	38.512	38.509	38.511


-26dBc Occupied Bandwidth

Antenna Port	Modulation	Bandwidth	Occupied Bandwidth (MHz)		
			Channel Position B	Channel Position M	Channel Position T
D	QPSK	25MHz	24.77	24.75	24.76
D	QPSK	30MHz	29.55	29.56	29.56
D	QPSK	35MHz	34.72	34.73	34.68
D	QPSK	40MHz	40.07	40.09	40.06


25MHz, Channel position B

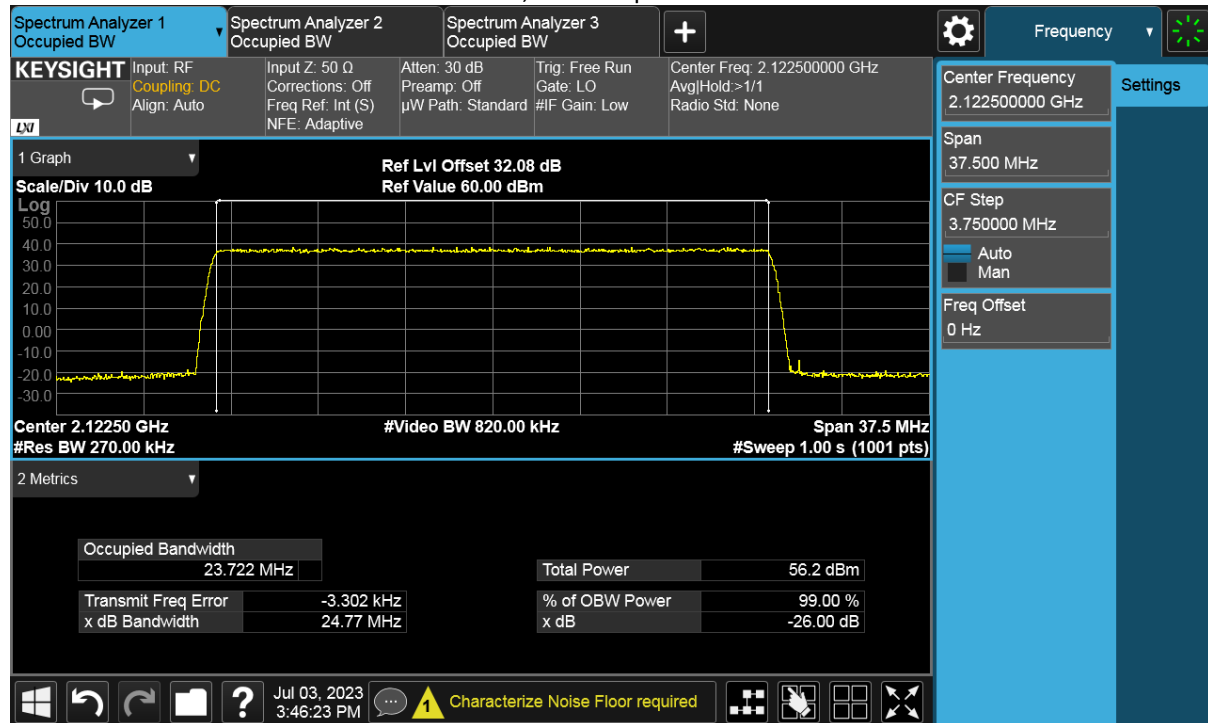


25MHz, Channel position M

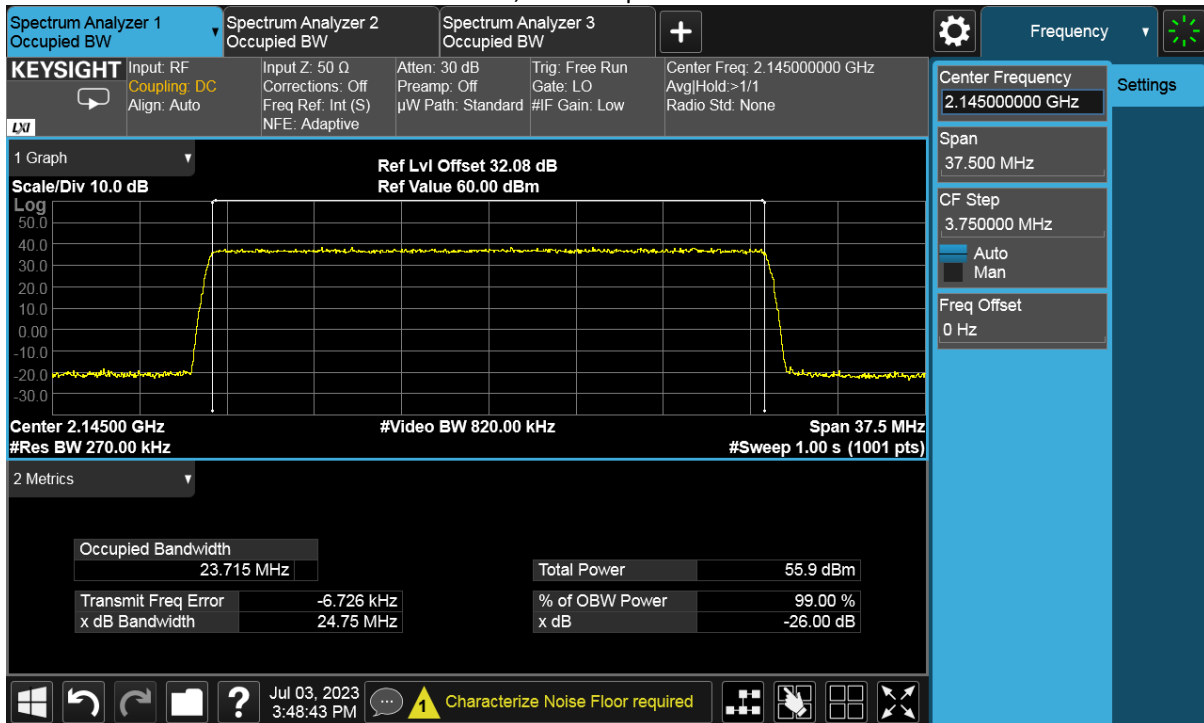


25MHz, Channel position T

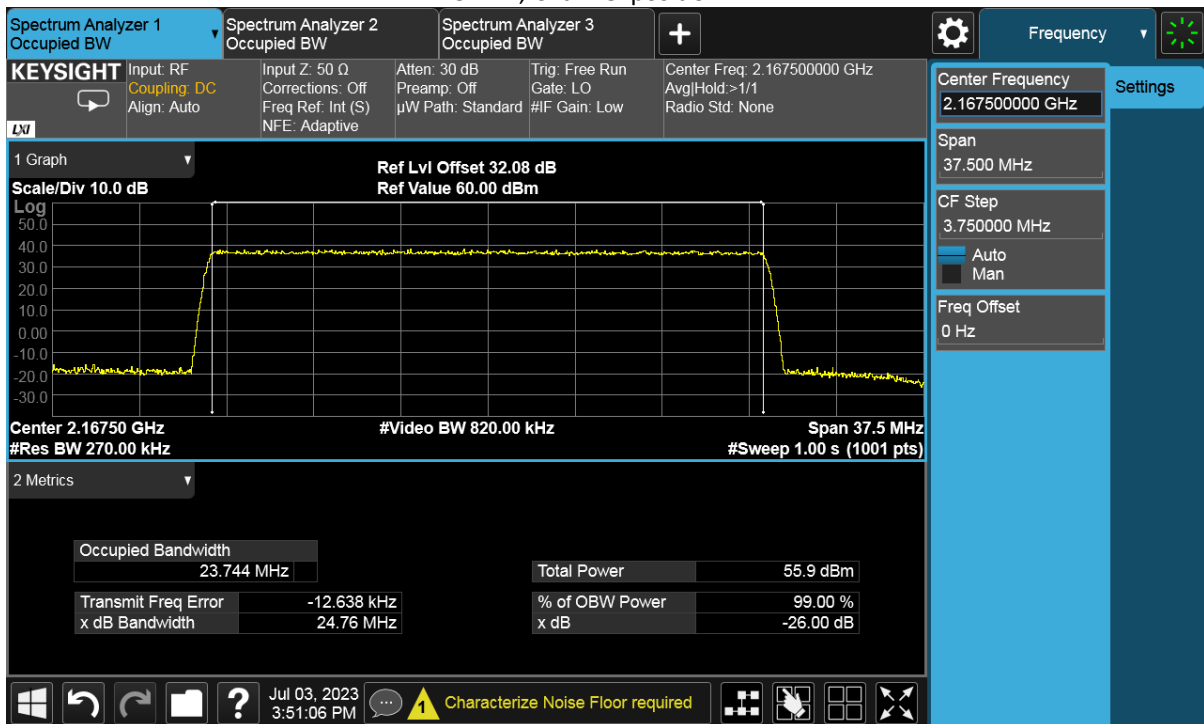


30MHz, Channel position B

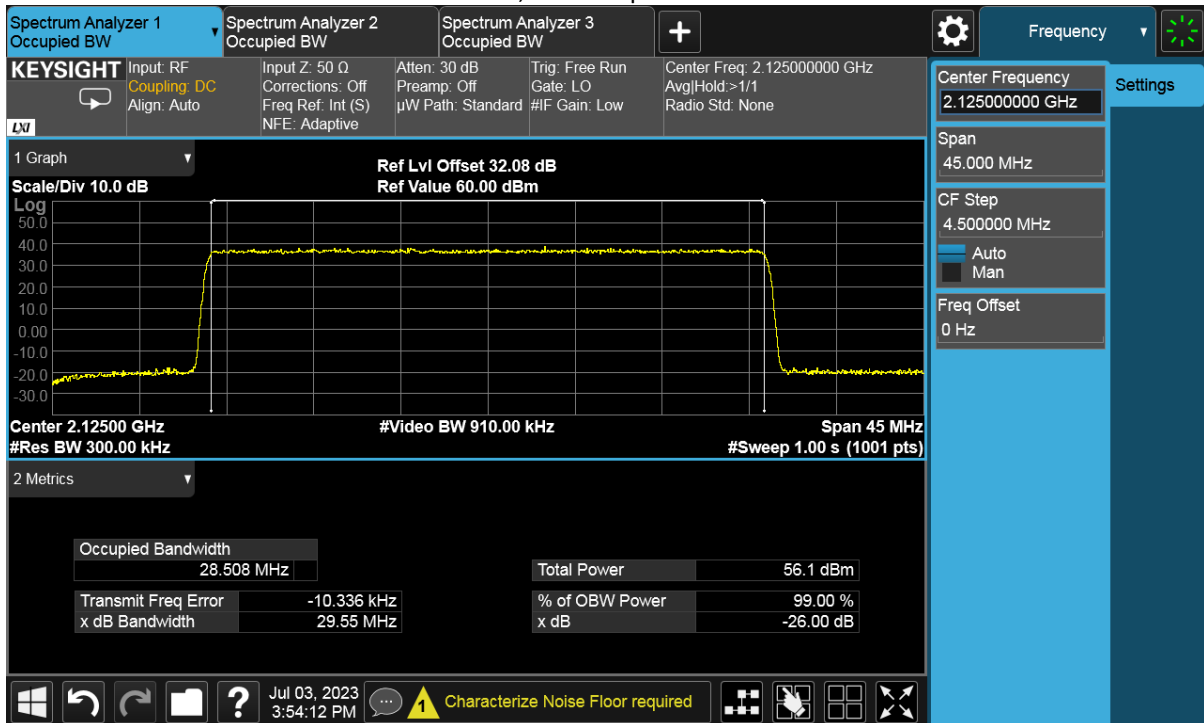


30MHz, Channel position M

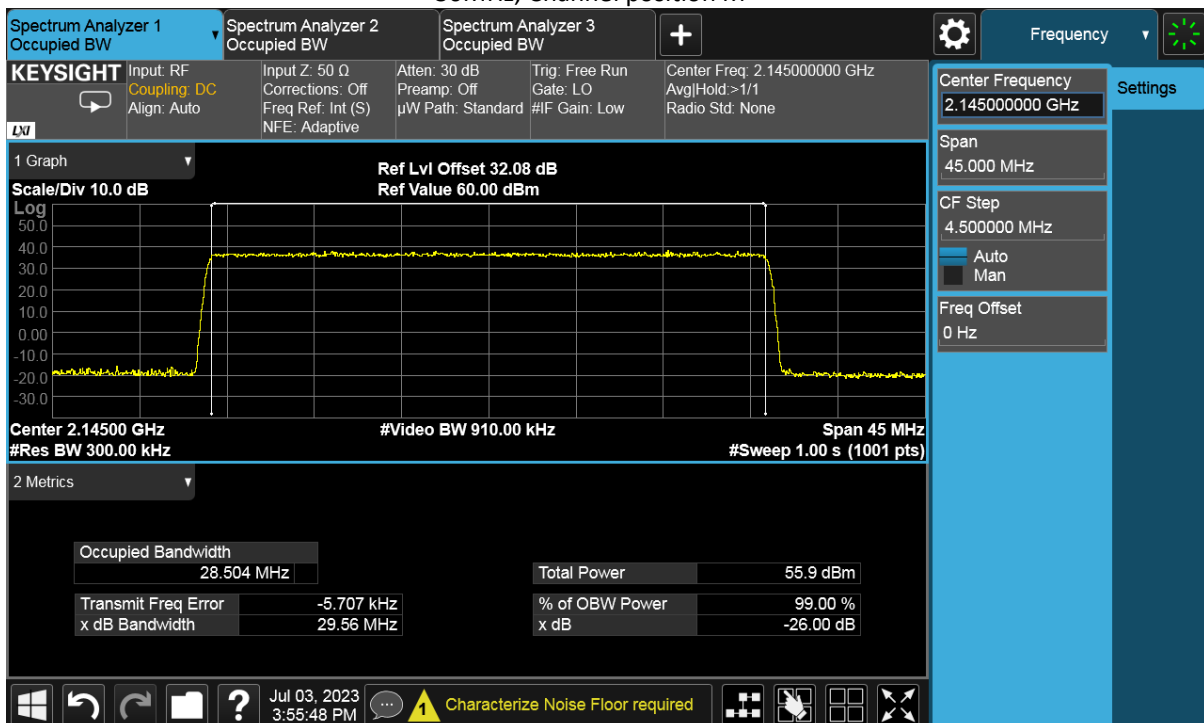


30MHz, Channel position T

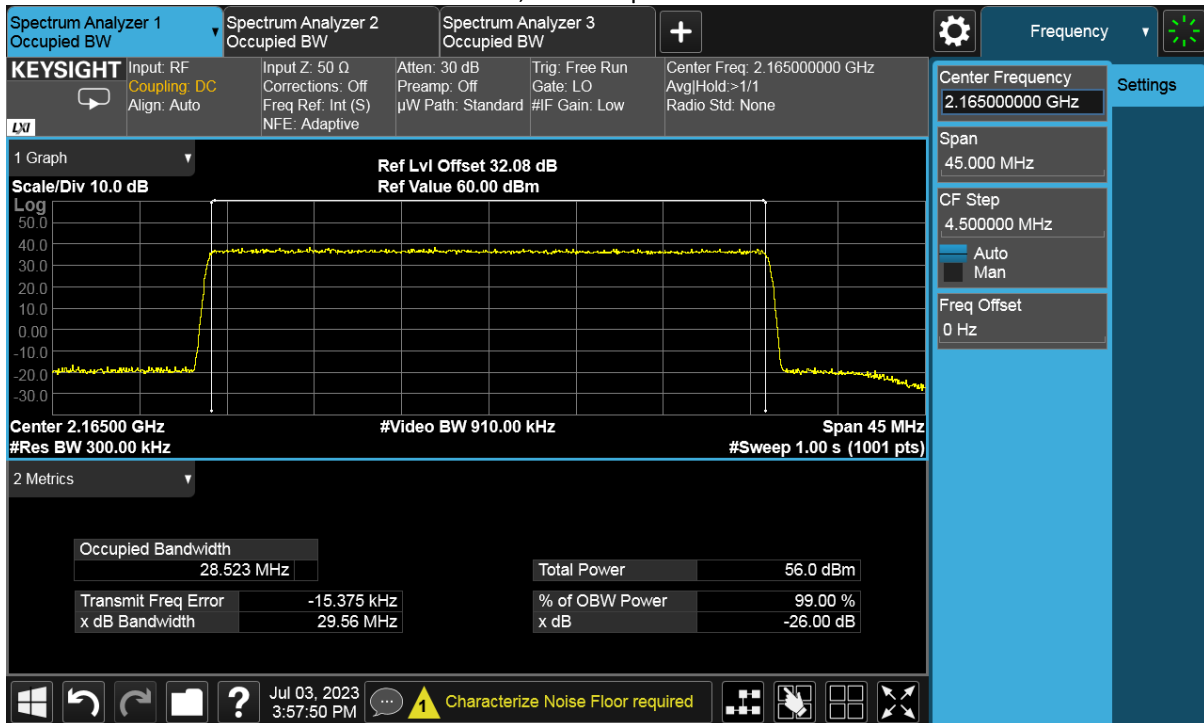


35MHz, Channel position B

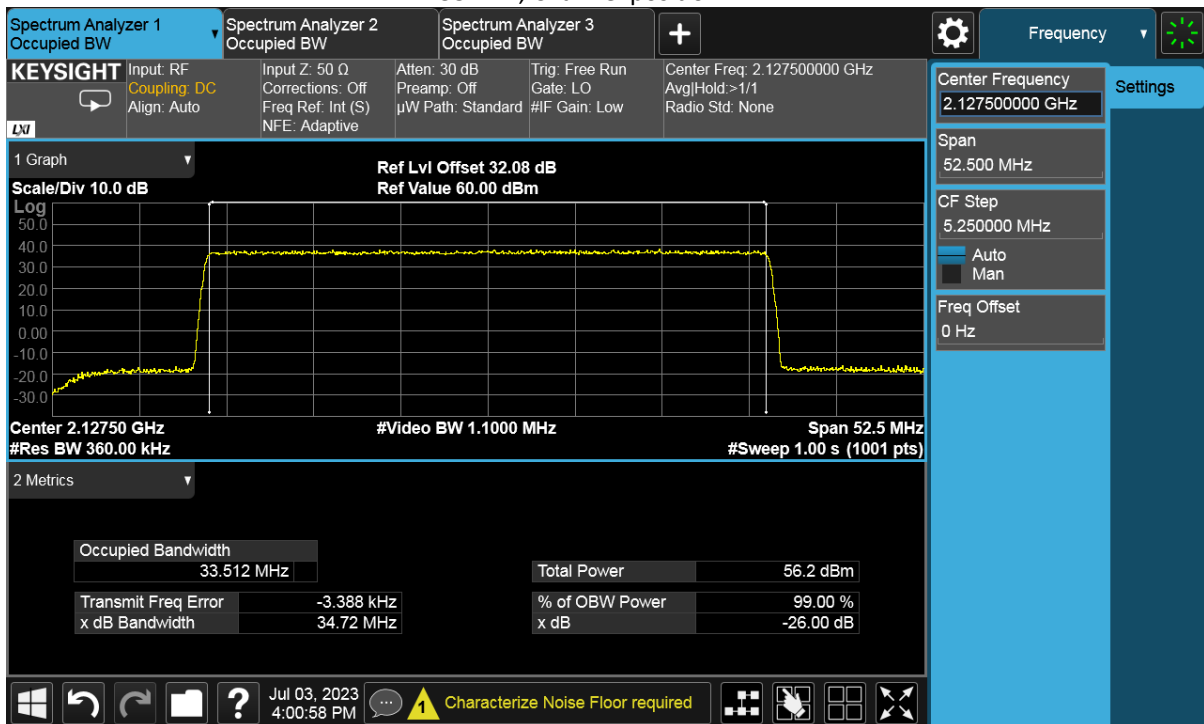


35MHz, Channel position M

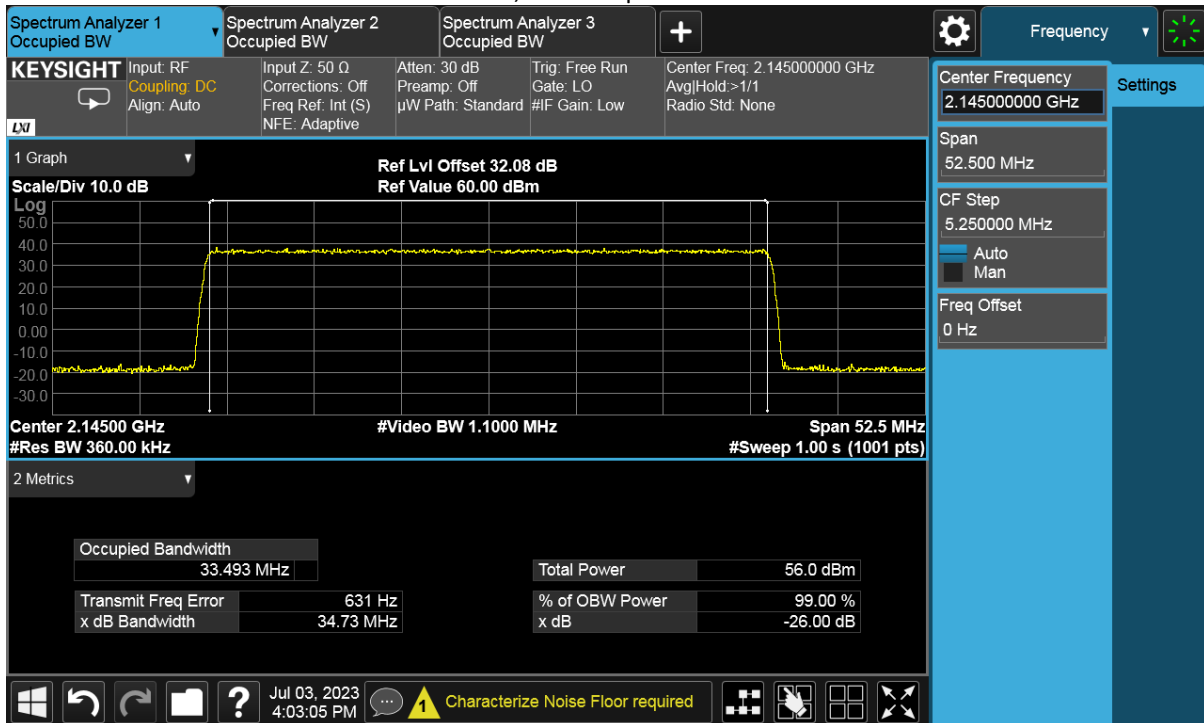


35MHz, Channel position T

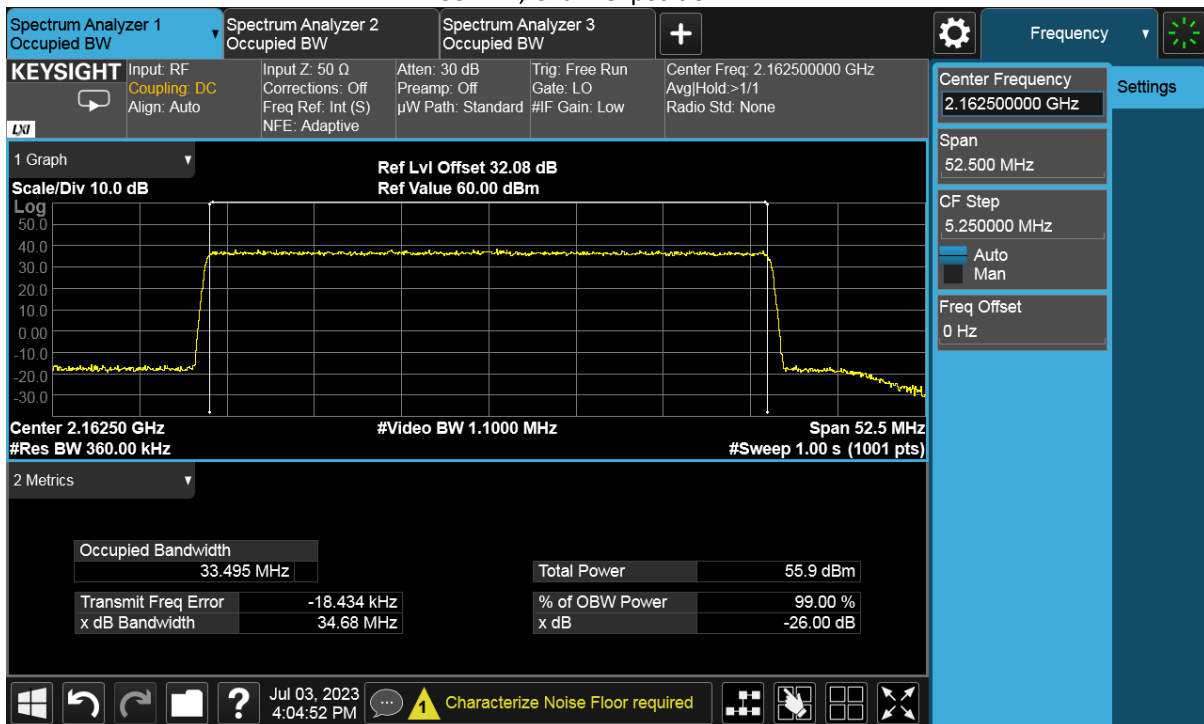

40MHz, Channel position B

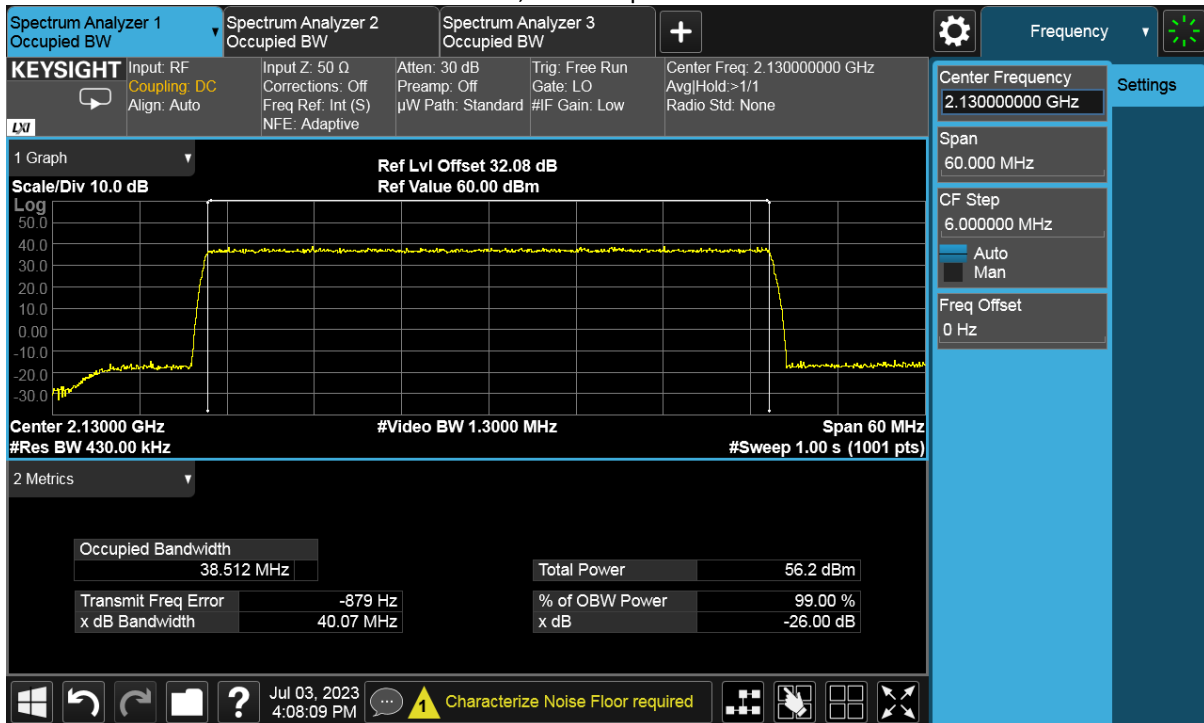


40MHz, Channel position M

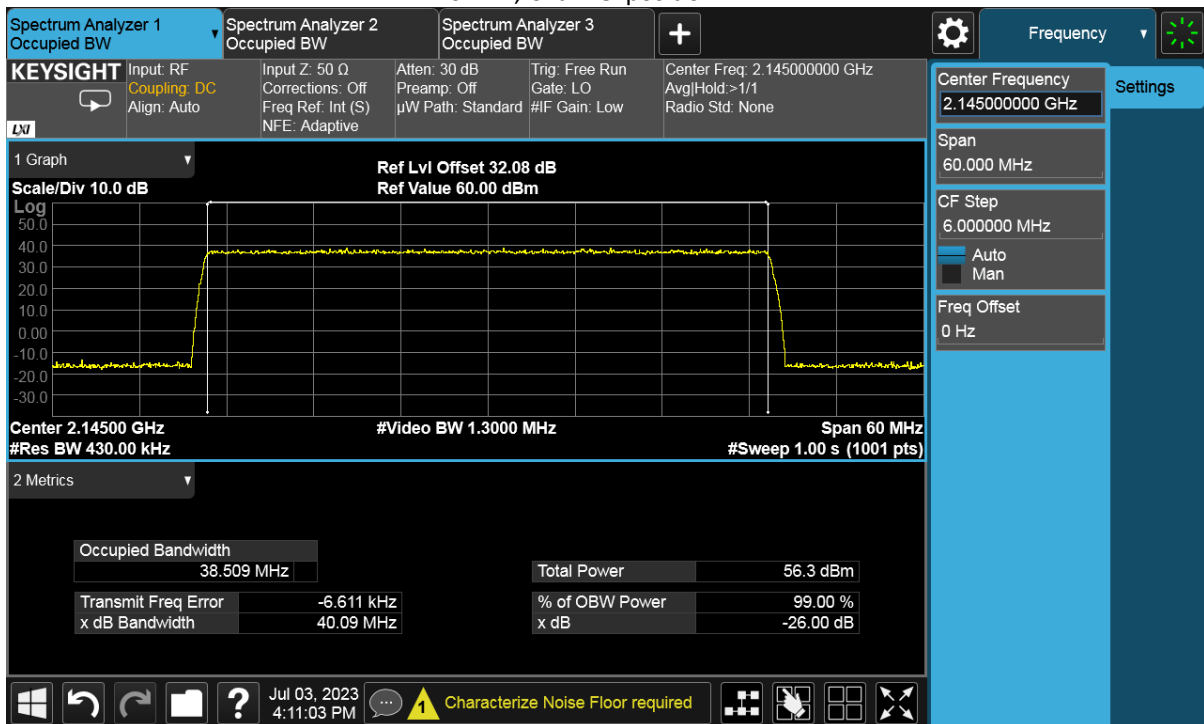

TEST REPORT

40MHz, Channel position T

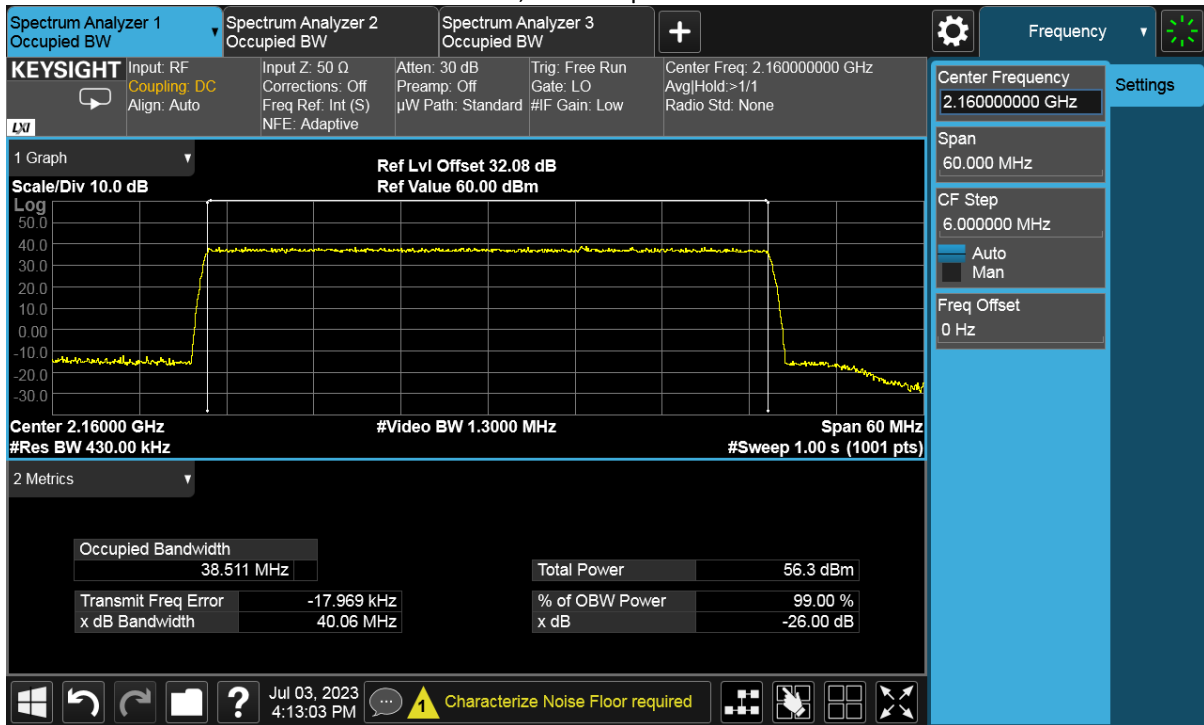

TEST REPORT**5 Unwanted Emissions at Band Edge**

Test result: Pass

5.1 Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

5.2 Measurement Procedure

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

For MIMO mode configurations, the limit was adjusted with a correction of -6.02dB [$10\log(1/4)$] by using the Measure and Add $10\log(N)$ dB technique according to KDB 662911 D01 Multiple Transmitter Output accounting for simultaneous transmission from antenna ports . Then the limit was adjusted to -19.02dBm .

Spectrum analyzer detector was set as RMS.


TEST REPORT

5.3 Measurement result


NR-1C-BE

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	25	270	-19.02
D	T	QPSK	25	270	-19.02

Channel Position B

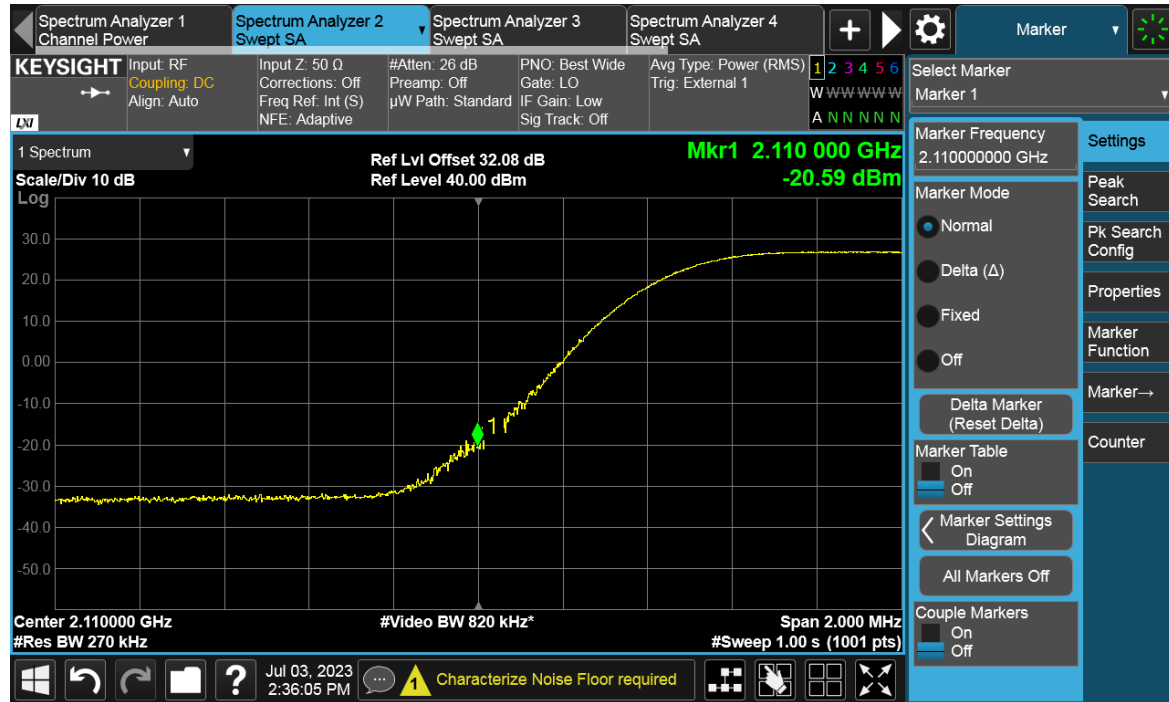


Channel Position T

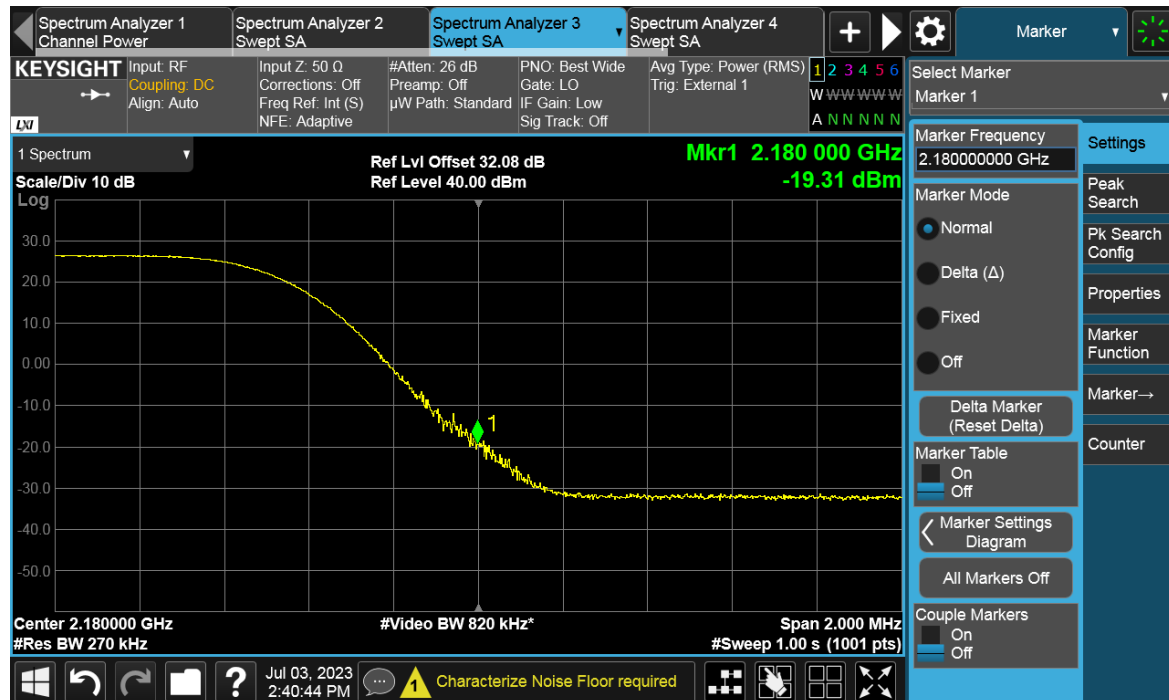

TEST REPORT

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	30	300	-19.02
D	T	QPSK	30	300	-19.02

Channel Position B

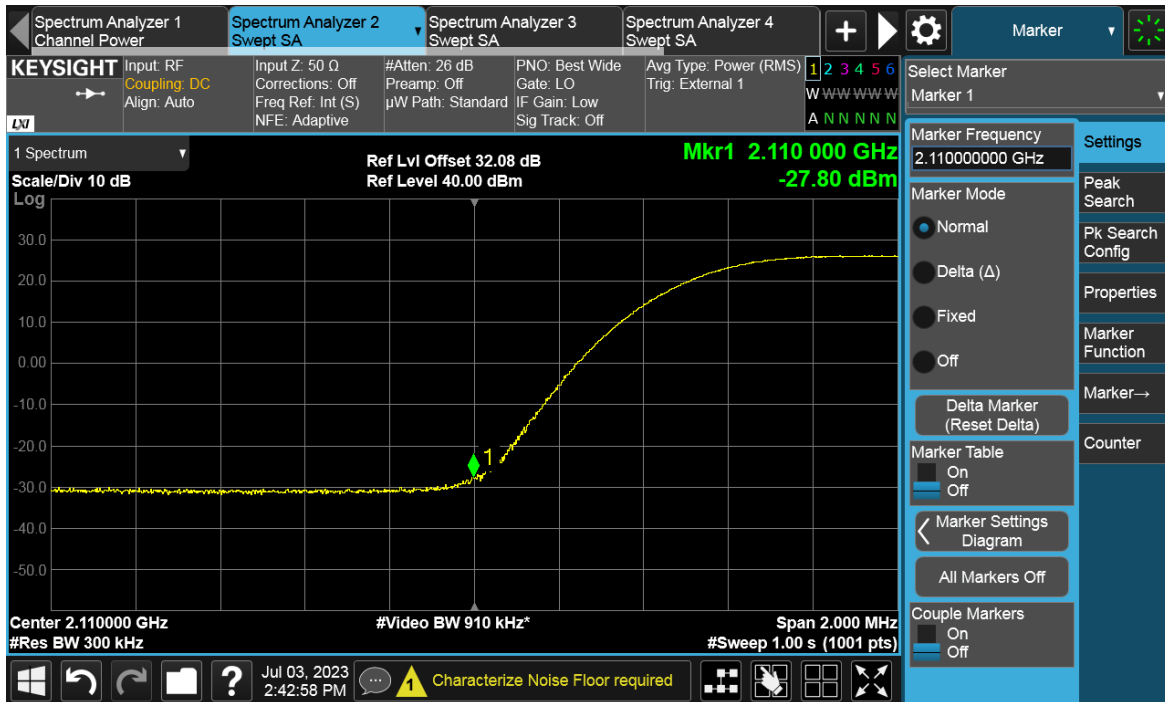



Channel Position T





TEST REPORT

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	35	360	-19.02
D	T	QPSK	35	360	-19.02

Channel Position B

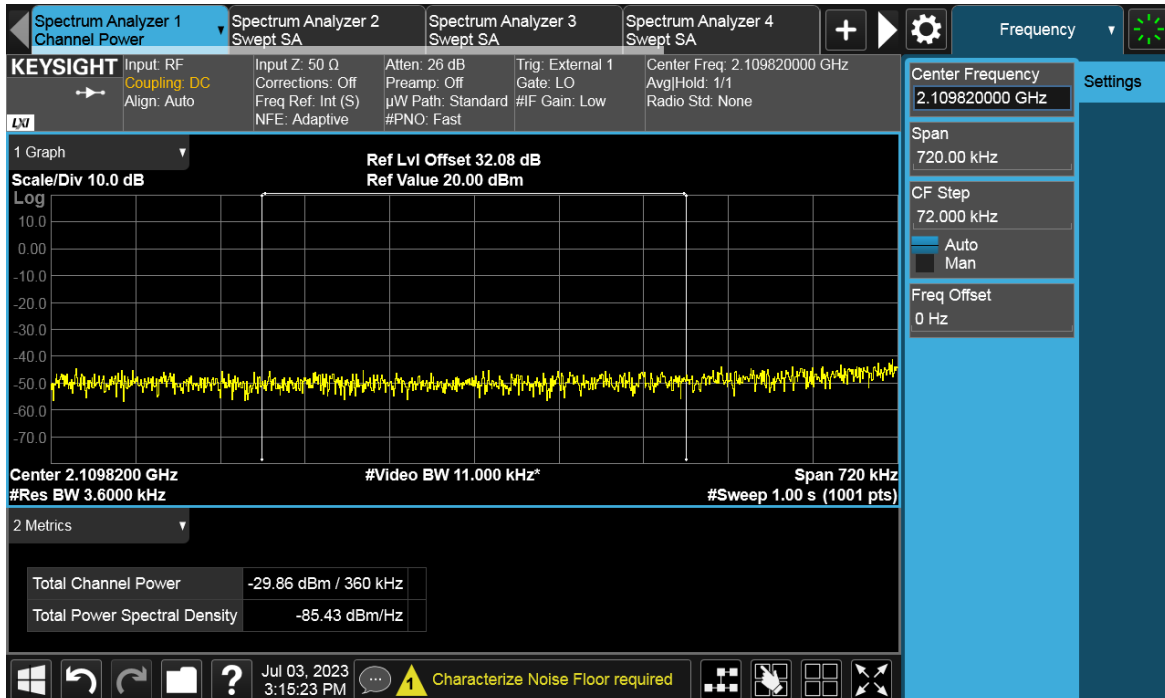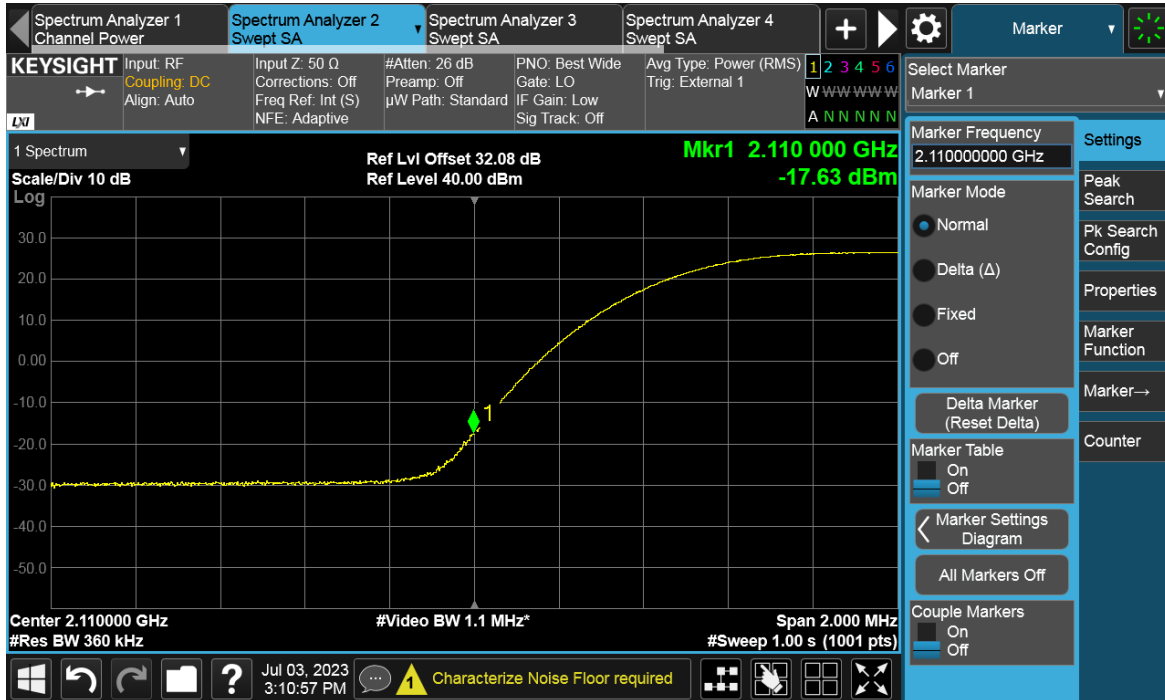


Channel Position T

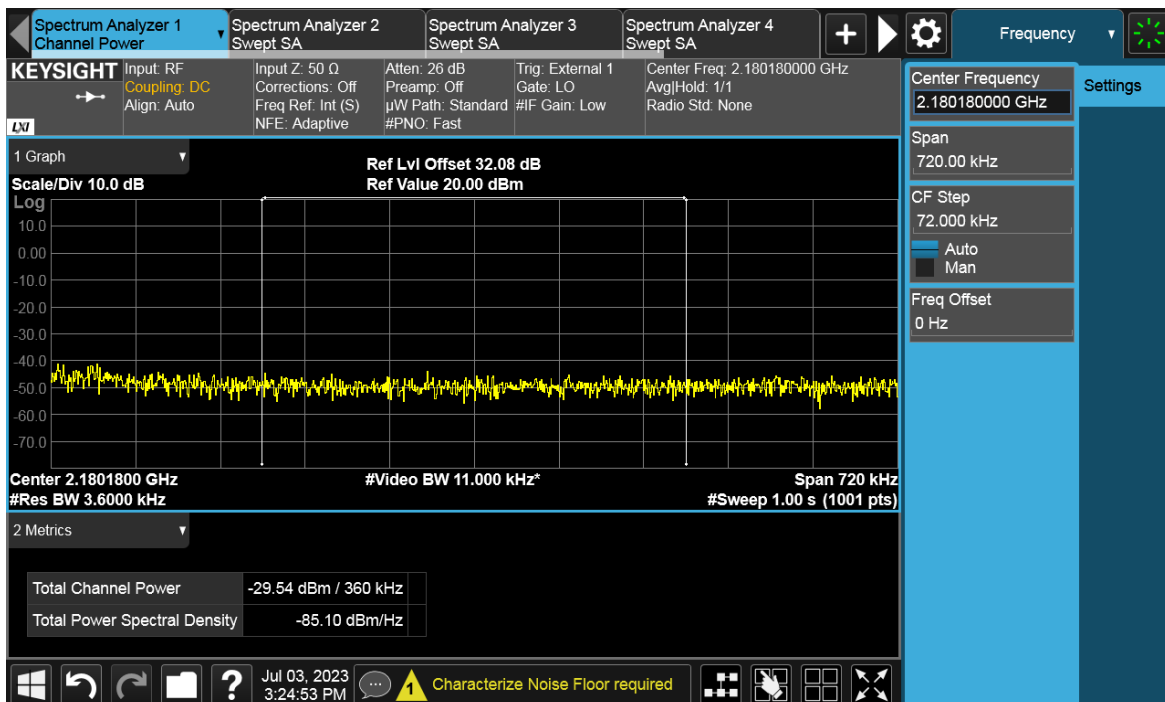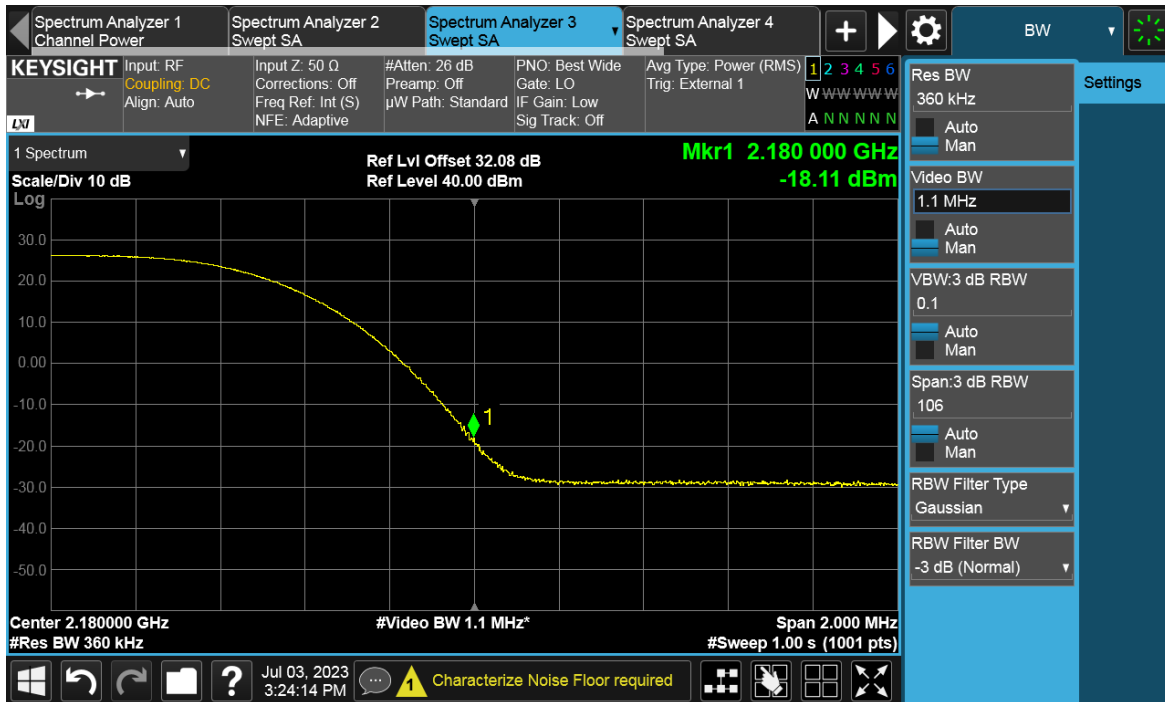



TEST REPORT

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	40	430	-19.02
D	T	QPSK	40	430	-19.02

Channel Position B

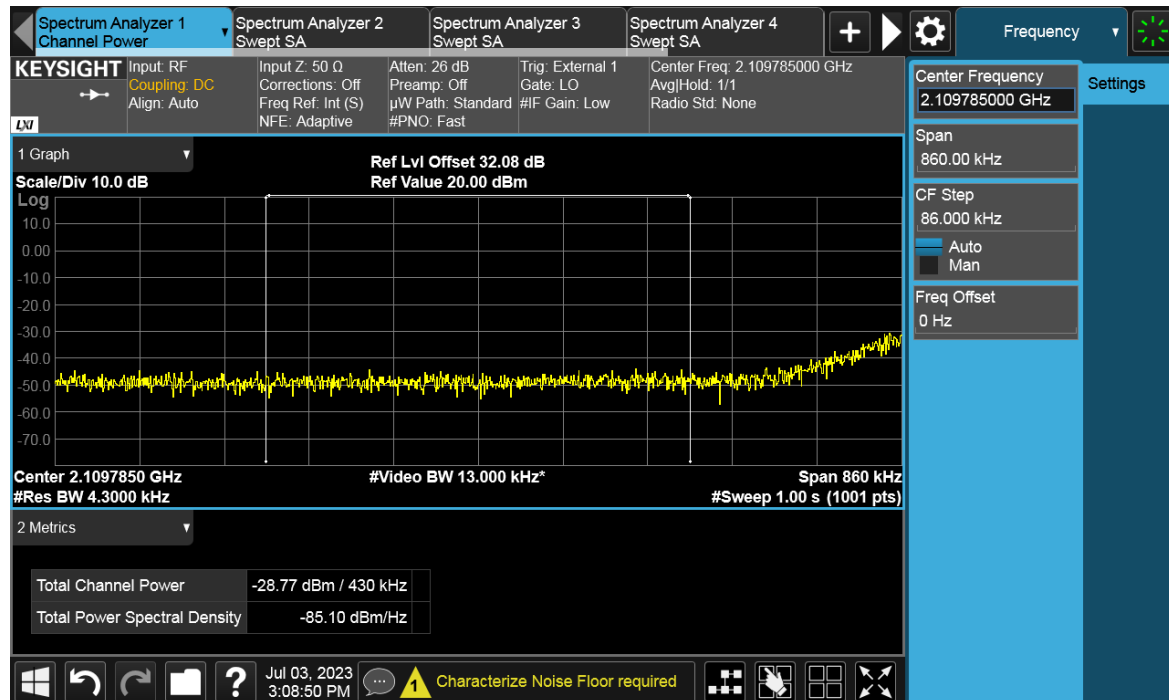

Channel Position T

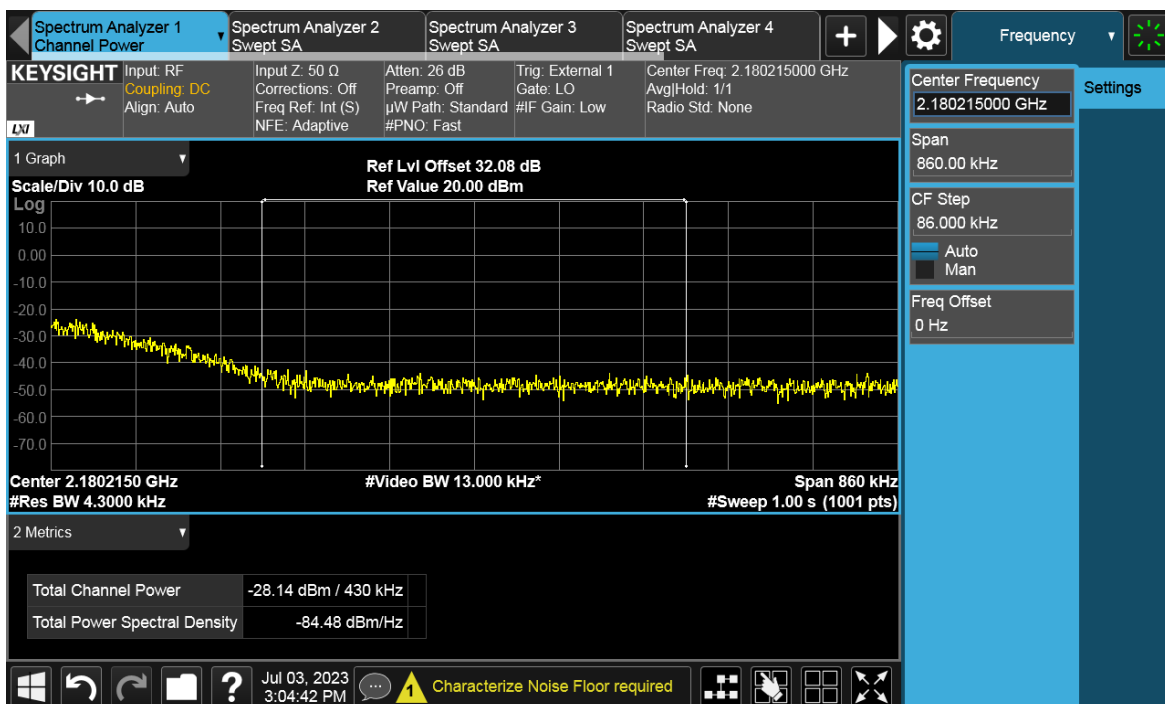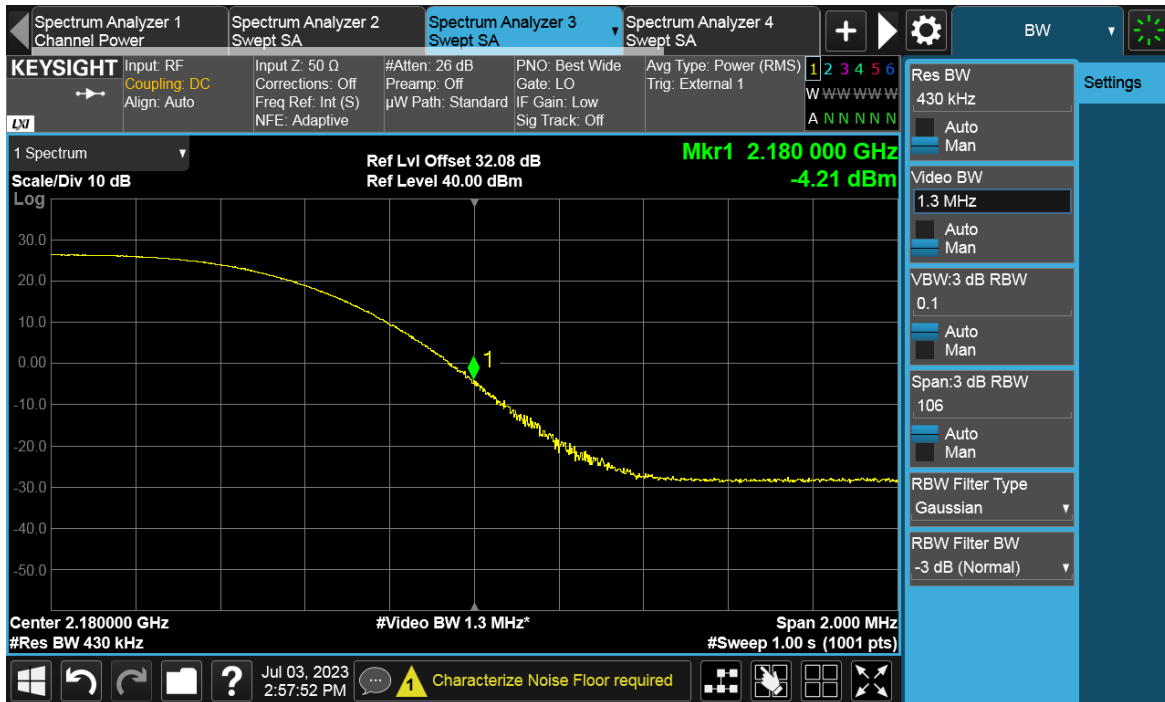


TEST REPORT

NR-2C-BE

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	25	270	-19.02
D	T	QPSK	25	270	-19.02

Channel Position B

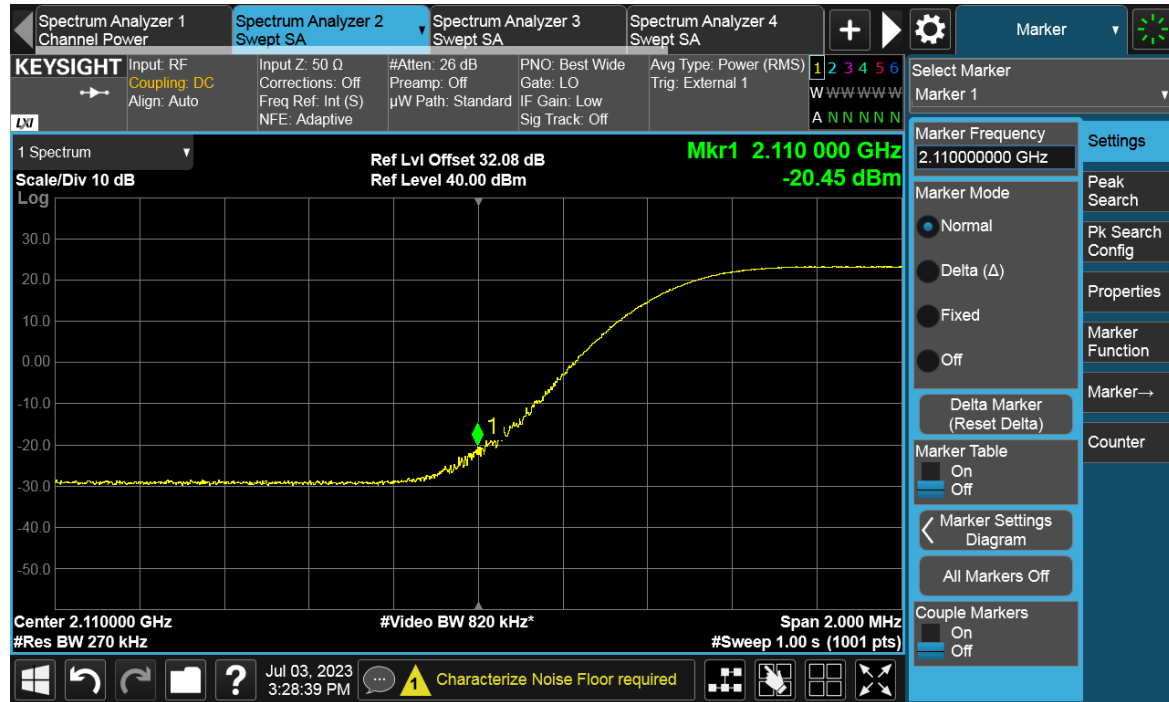


Channel Position T




TEST REPORT

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	30	300	-19.02
D	T	QPSK	30	300	-19.02

Channel Position B

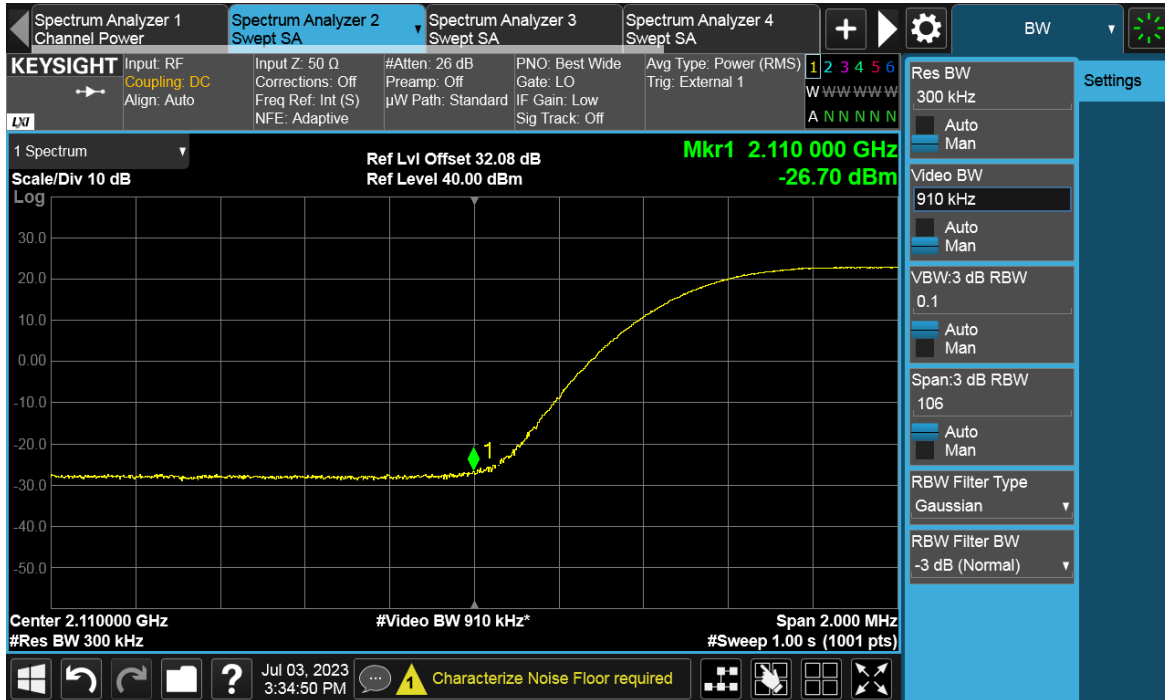


Channel Position T

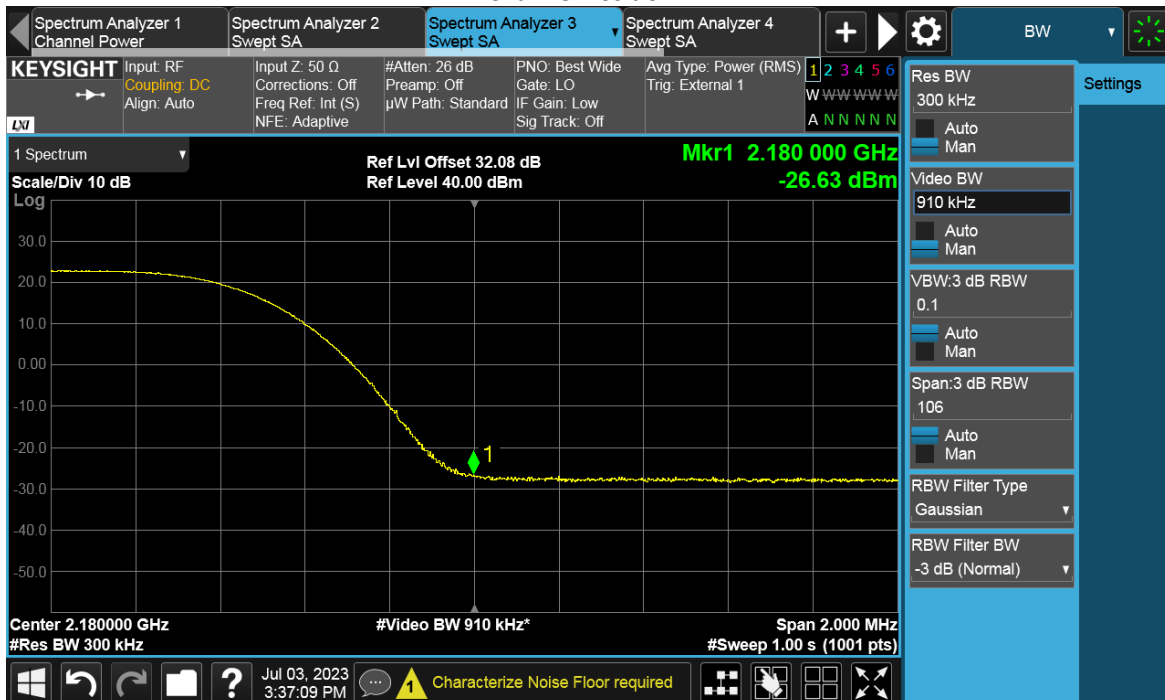

TEST REPORT

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	35	360	-19.02
D	T	QPSK	35	360	-19.02

Channel Position B

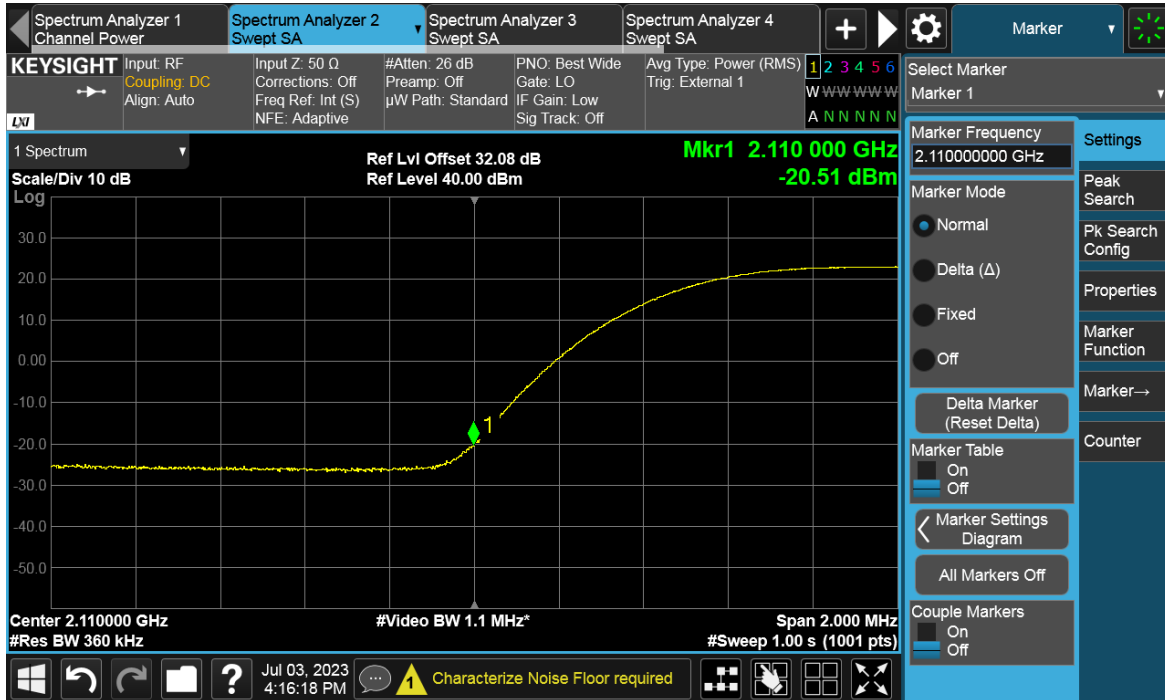

Channel Position T



TEST REPORT**6 Conducted Unwanted Emission**

Test result: Pass

6.1 Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.2 Measurement Procedure

In accordance with FCC rules, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

The spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using an attenuator and the frequency spectrum investigated from 9kHz to 22GHz. The resolution bandwidth of 1MHz was employed for frequency band 9kHz to 22GHz. The spectrum analyzer detector was set to RMS.


For MIMO mode configurations, the limit was adjusted with a correction of -6.02dB [$10\log(1/4)$] by using the Measure and Add $10\log(N)$ dB technique according to KDB 662911 D01 Multiple Transmitter Output accounting for simultaneous transmission from antenna ports. Then the limit was adjusted to -19.02dBm.

TEST REPORT



6.3 Measurement result

NR-1C



Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	25	1000	-19.02
D	T	QPSK	25	1000	-19.02

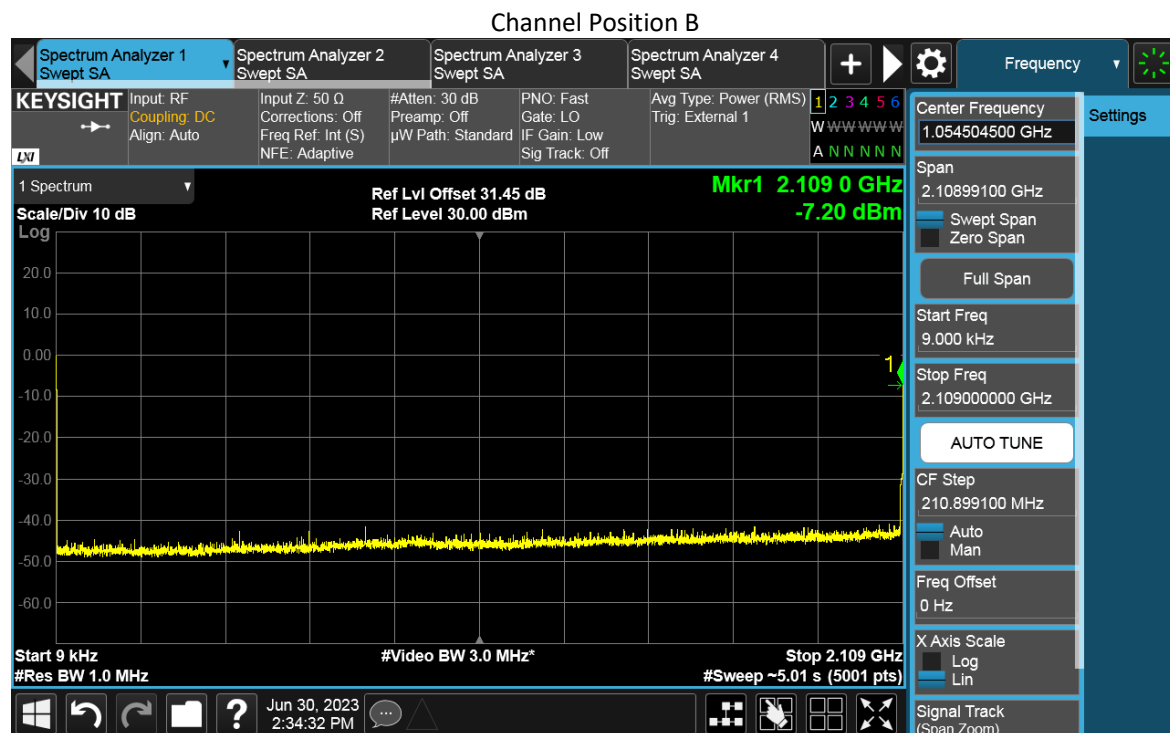

TEST REPORT

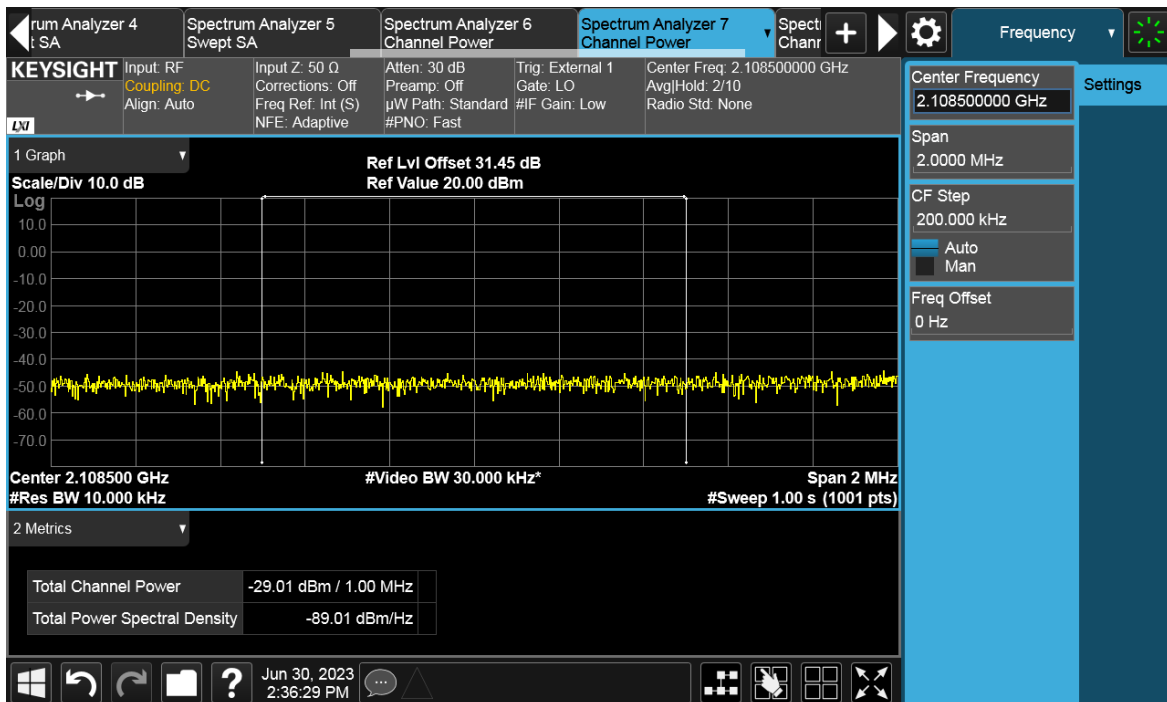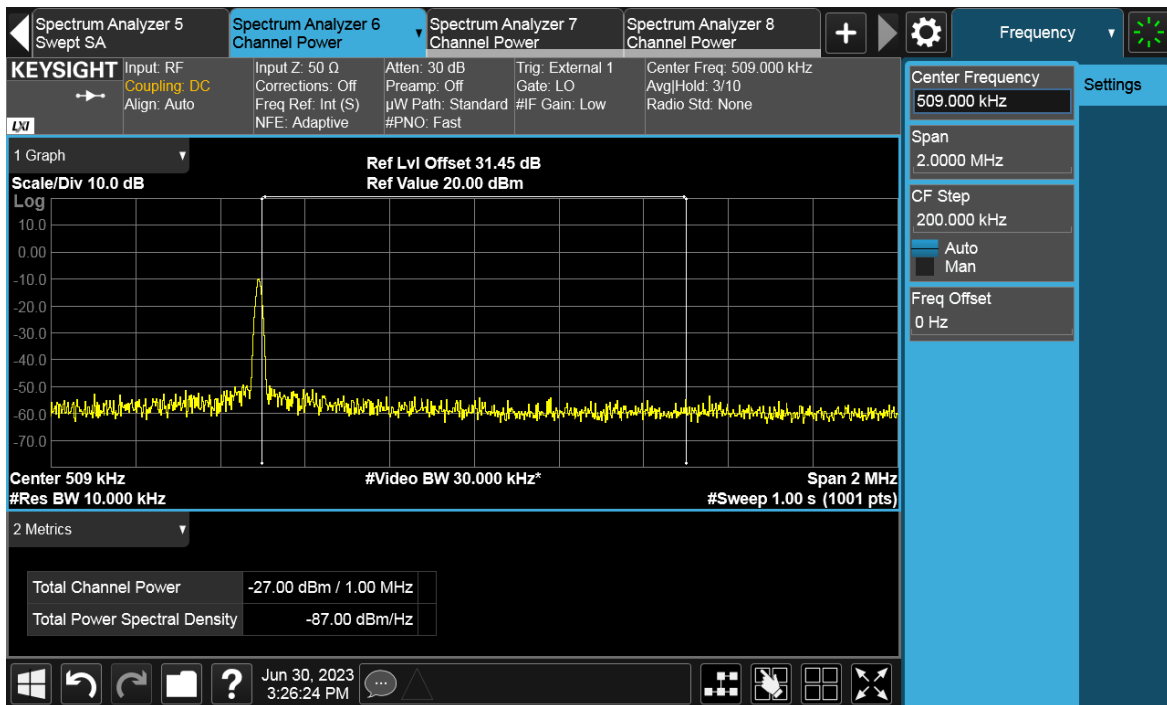


TEST REPORT

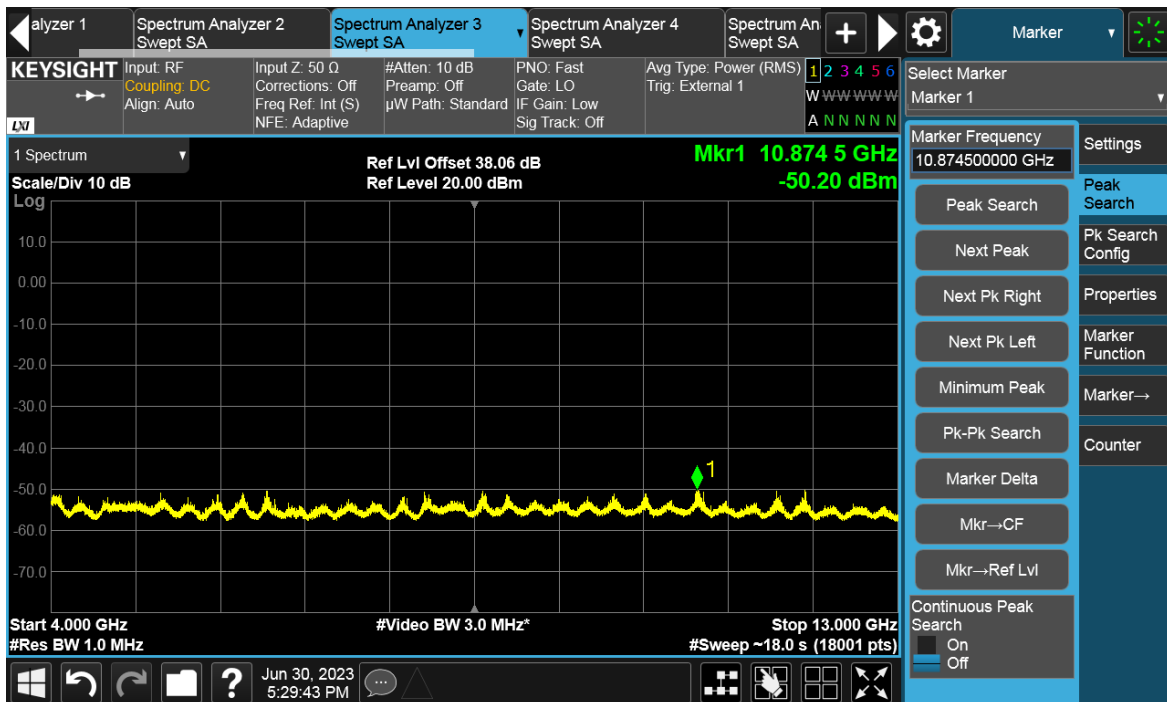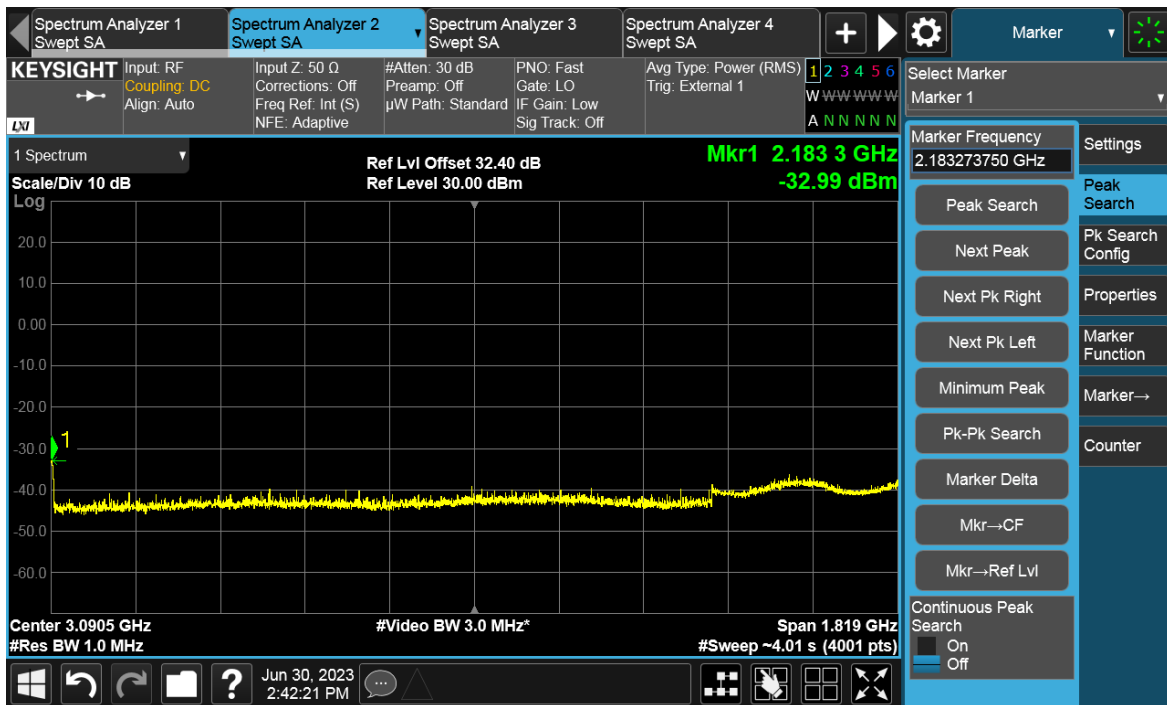



TEST REPORT





Channel Position T

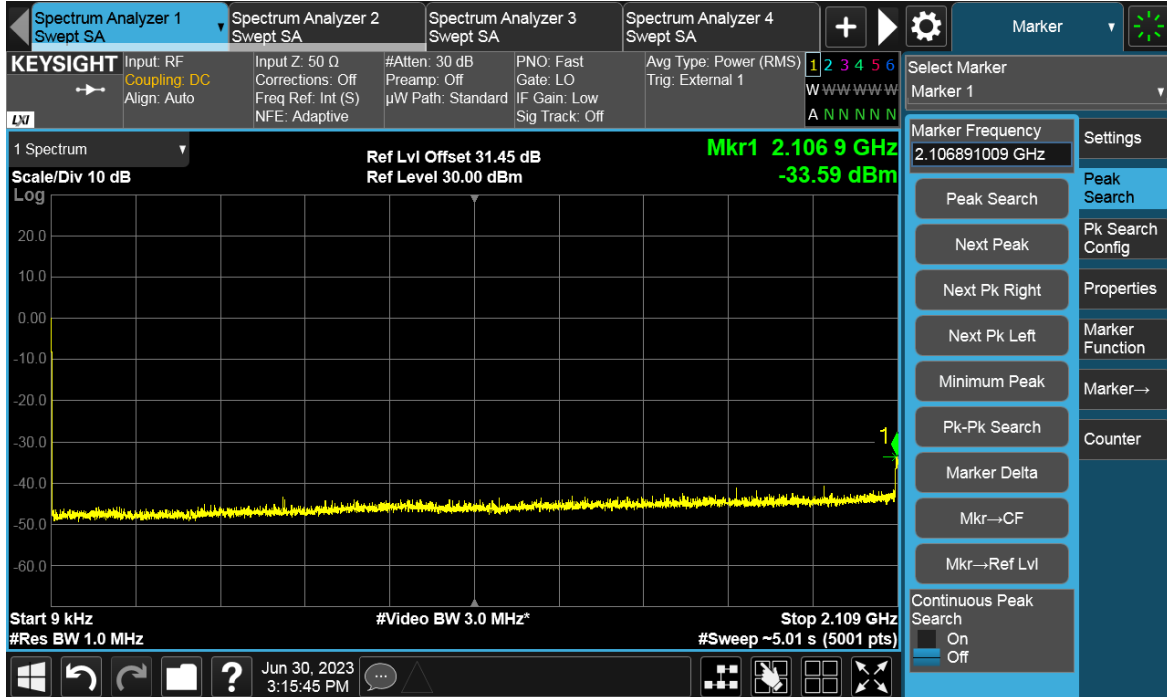


TEST REPORT

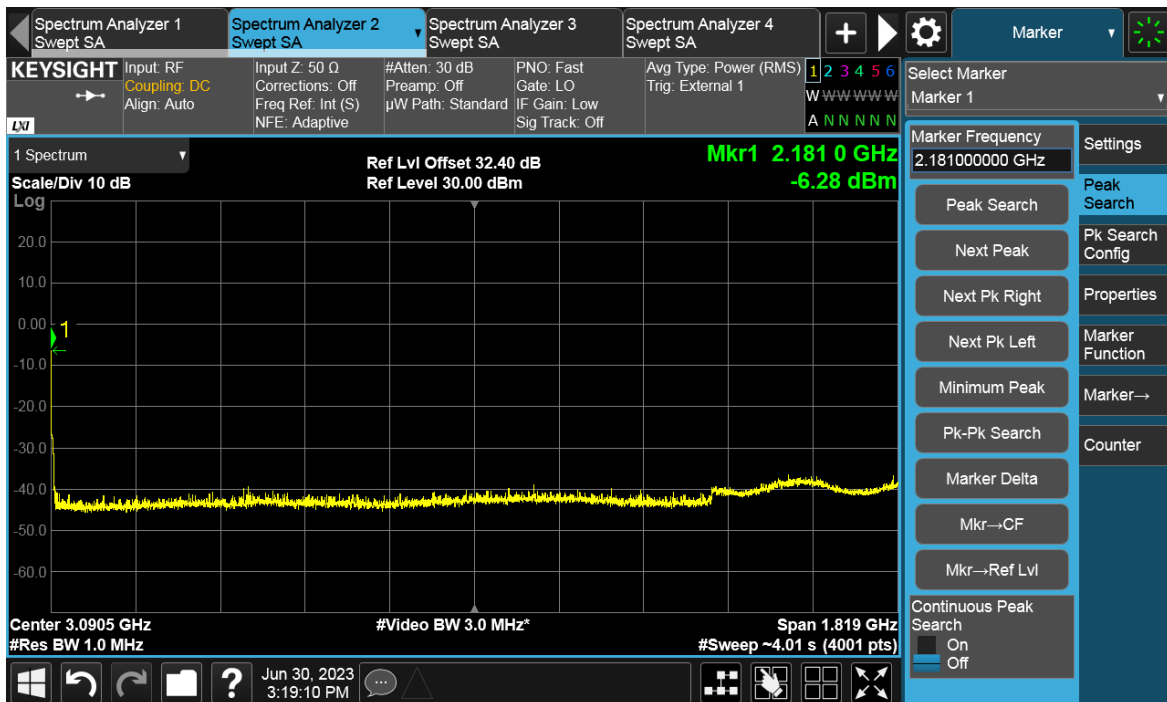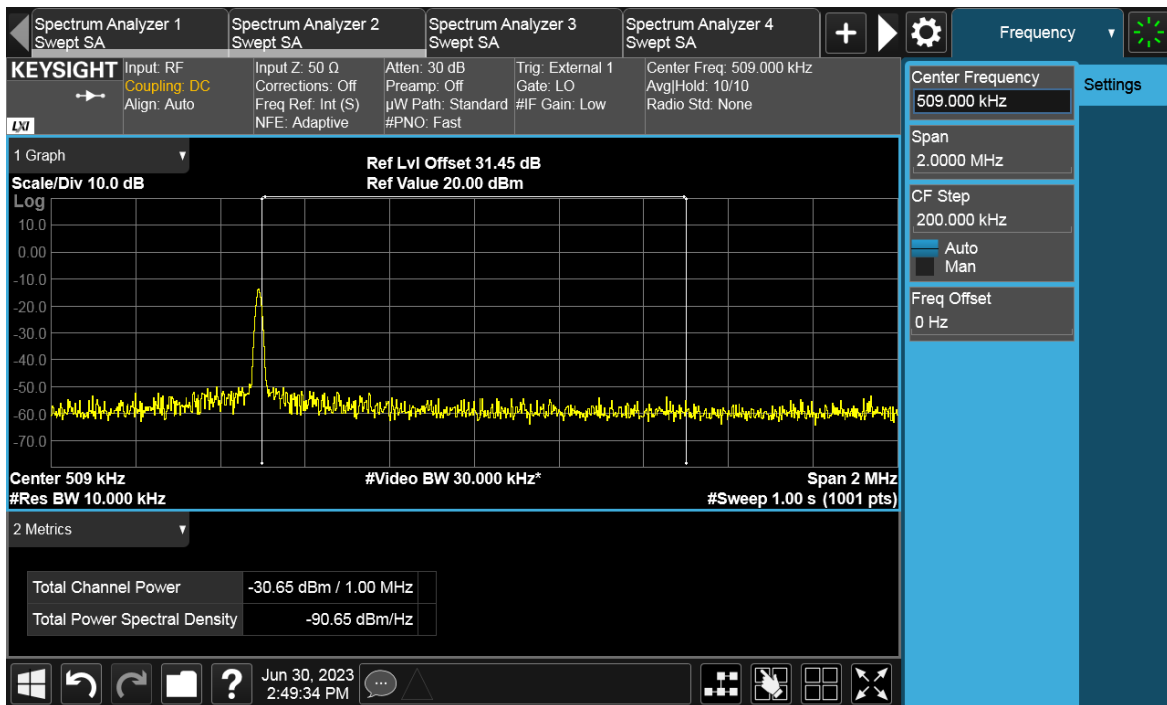

TEST REPORT

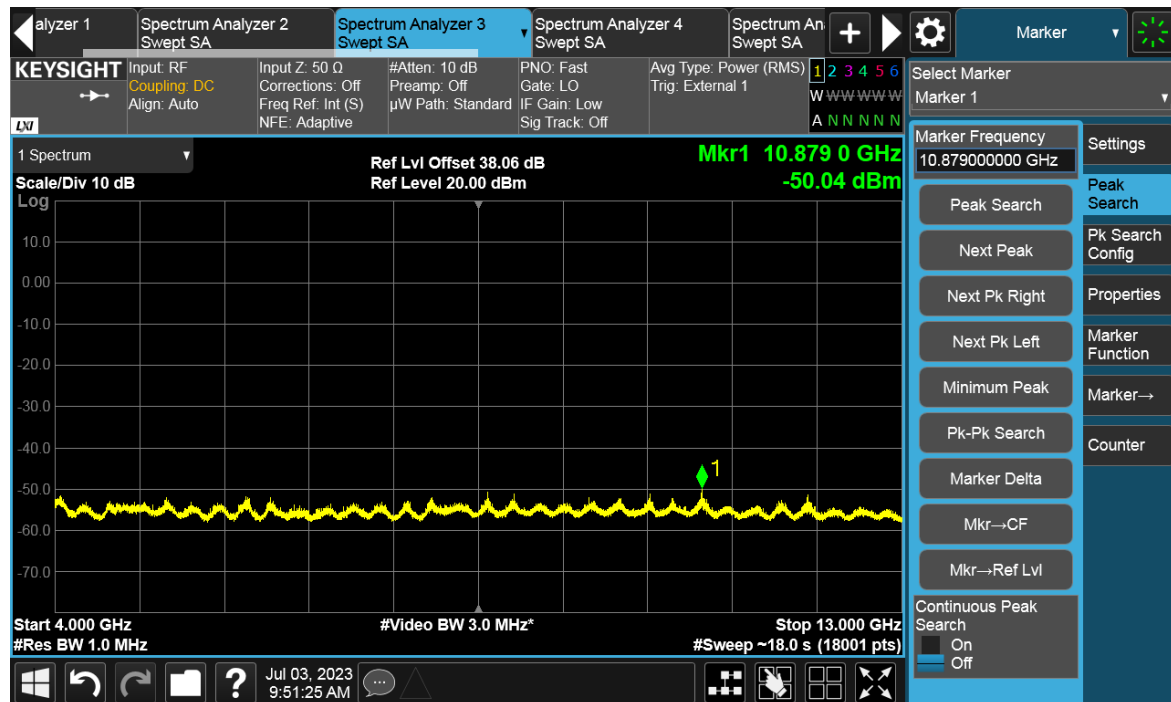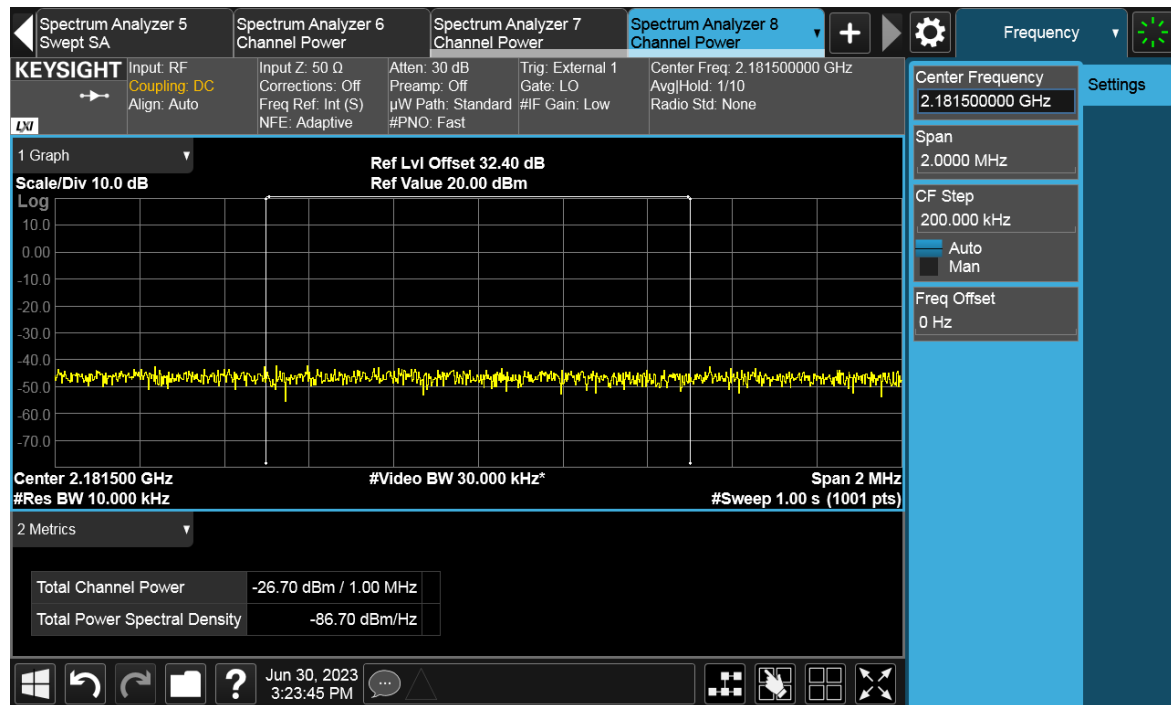


TEST REPORT

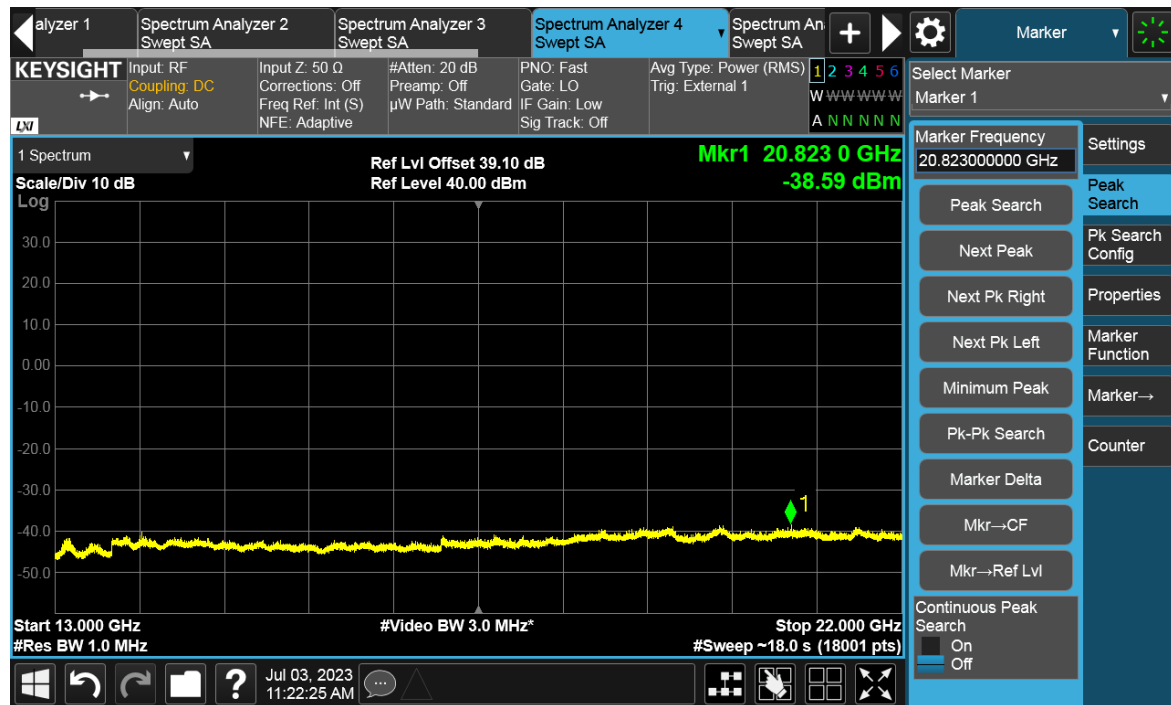

Antenna Port	Channel Position	Modulation	Carrier BW (MHz)	RBW (kHz)	Limit (dBm)
D	B	QPSK	30	1000	-19.02
D	T	QPSK	30	1000	-19.02

Channel Position B

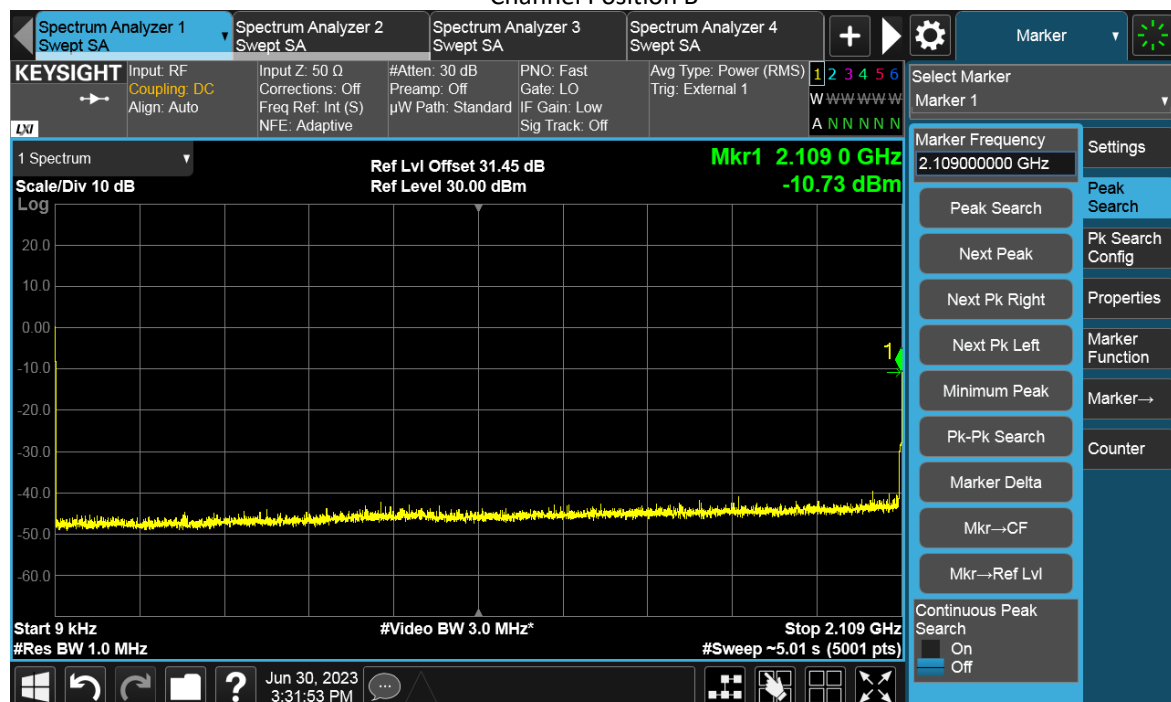

TEST REPORT

