



FCC PART 15, SUBPART C

TEST REPORT


For

Roku, Inc.

150 Winchester Cir

Los Gatos, CA 95032, USA

FCC ID: TC2-R1026

Report Type: Original Report	Model: 100002421
Prepared By Zhao Zhao Test Engineer	
Report Number R1905296-247 (DTS)	
Report Date 2019-08-21	
Reviewed By Simon Ma RF Supervisor	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Ave Sunnyvale, CA 94089, USA Tel: (408) 732-9162, Fax: (408) 732 9164	



Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This test report **shall not** be used by the customer to claim product certification, approval, or endorsement by A2LA or any agency of the United States Government or any foreign government.

* This test report may contain data and test methods that are not covered by BACL's scope of accreditation as of the test report date shown above. These items are marked within the test report text with an asterisk "*"

TABLE OF CONTENTS

1	General Description	5
1.1	Product Description for Equipment Under Test (EUT)	5
1.2	Objective.....	5
1.3	Related Submittal(s)/Grant(s)	5
1.4	Test Methodology	5
1.5	Measurement Uncertainty	6
1.6	Test Facility Registrations	6
1.7	Test Facility Accreditations	6
2	System Test Configuration.....	9
2.1	Justification.....	9
2.2	EUT Exercise Software.....	9
2.3	Duty Cycle Correction Factor	10
2.4	Equipment Modifications.....	11
2.5	Local Support Equipment	12
2.6	Support Equipment	12
2.7	Power Supply/Adapter	12
2.8	Interface Ports and Cabling.....	12
3	Summary of Test Results.....	13
4	FCC §15.203 - Antenna Requirements.....	14
4.1	Applicable Standards	14
4.2	Antenna Description	14
5	FCC §2.1091, §15.247(i)– RF Exposure	15
5.1	Applicable Standards	15
5.2	MPE Prediction.....	15
5.3	MPE Results	15
6	FCC §15.207 - AC Line Conducted Emissions	18
6.1	Applicable Standards	18
6.1	Test Setup	18
6.2	Test Procedure	18
6.3	Corrected Amplitude and Margin Calculation	19
6.4	Test Setup Block Diagram	19
6.5	Test Equipment List and Details.....	20
6.6	Test Environmental Conditions	20
6.7	Summary of Test Results	20
6.8	Conducted Emissions Test Plots and Data.....	21
7	FCC §15.209, §15.247(d) - Spurious Radiated Emissions.....	23
7.1	Applicable Standards	23
7.2	Test Setup	24
7.3	Test Procedure	24
7.4	Corrected Amplitude and Margin Calculation	25
7.5	Test Equipment List and Details.....	25
7.6	Test Environmental Conditions	26
7.7	Summary of Test Results	26
7.8	Radiated Emissions Test Results	27
9	FCC §15.247(a)(2) -Emission Bandwidth.....	36
9.1	Applicable Standards	36
9.2	Measurement Procedure.....	36
9.3	Test Equipment List and Details.....	36
9.4	Test Environmental Conditions	36
9.5	Test Results.....	37
10	FCC §15.247(b)(3) - Output Power Measurement	53

10.1	Applicable Standards	53
10.2	Measurement Procedure.....	53
10.3	Test Equipment List and Details.....	53
10.4	Test Environmental Conditions	53
10.5	Test Results.....	54
11	FCC §15.247(d) - 100 kHz Bandwidth of Band Edges.....	56
11.1	Applicable Standards	56
11.2	Measurement Procedure.....	56
11.3	Test Equipment List and Details.....	56
11.4	Test Environmental Conditions	56
11.5	Test Results.....	57
12	FCC §15.247(e) - Power Spectral Density	63
12.1	Applicable Standards	63
12.2	Measurement Procedure.....	63
12.3	Test Equipment List and Details.....	63
12.4	Test Environmental Conditions	63
12.5	Test Results.....	64
13	FCC §15.247(d) - Spurious Emissions at Antenna Terminals.....	75
13.1	Applicable Standards	75
13.2	Test Procedure	75
13.3	Test Equipment List and Details.....	75
13.4	Test Environmental Conditions	75
13.5	Test Results.....	76
13	Annex A (Normative)- EUT Test Setup Photographs.....	91
14	Annex B (Normative) – EUT External Photographs	92
15	Annex C (Normative) – EUT Internal Photographs	93
16	Annex E (Normative) – A2LA Electrical Testing Certificate.....	94

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1905296-247	Original Report	2019-08-21

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of Roku Inc., Model: 100002421, FCC ID: TC2-R1026.

1.2 Objective

This report is prepared on behalf of *Roku, Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission's rules.

The objective is to determine compliance with FCC Part 15.247 for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

FCC 15.247 Report: R1905296-247 (DSS); FCC ID: TC2-R1026
FCC 15.407 Report: R1905296-407 NII; FCC ID: TC2-R1026

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide

range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify

- For the USA (Federal Communications Commission):
 - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
 - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
 - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
 - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
 - 2 All Scope 2-Licensed Personal Mobile Radio Services;
 - 3 All Scope 3-Licensed General Mobile and Fixed Radio Services;
 - 4 All Scope 4-Licensed Maritime and Aviation Radio Services;
 - 5 All Scope 5-Licensed Fixed Microwave Radio Services
 - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
 - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
 - 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes and Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)

- for Imaging Equipment (ver. 2.0)
- for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I and Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2004/108/EC US-EU EMC and Telecom MRA CAB
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA)
APEC Tel MRA -Phase I and Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I and Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v05r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The software used in testing to configure the EUT was Putty. The software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting RADIO 2 Ant A & B	Power Setting RADIO 1 Ant A
802.11b	2412	63	50
	2437	63	58
	2462	63	52
802.11g	2412	57	49
	2437	60	54
	2462	58	48
802.11n20	2412	54	50
	2437	61	50
	2462	59	48
Modulation	Frequency (MHz)	Bluetooth	
BLE	2402	Max	
	2440	Max	
	2472	Max	

Note: Radio 2 is Roku Wifi 1 and Radio 1 is Roku Wifi 2 in the block diagram.

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v05r02 section 6.0:

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).


Radio Mode	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11b	100	0
802.11g	100	0
802.11n20	100	0
BLE	100	0

Duty Cycle = On Time (ms)/ Period (ms)


Duty Cycle Correction Factor (dB) = $10 \cdot \log(1/\text{Duty Cycle})$

Please refer to the following plots.


802.11 b mode

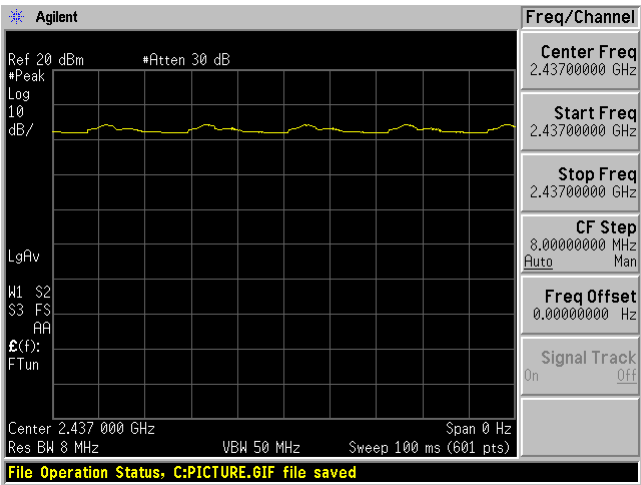


802.11 g mode

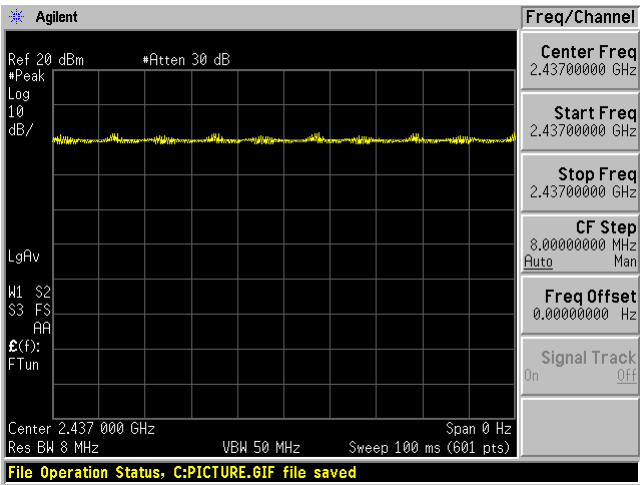

802.11 n20 mode

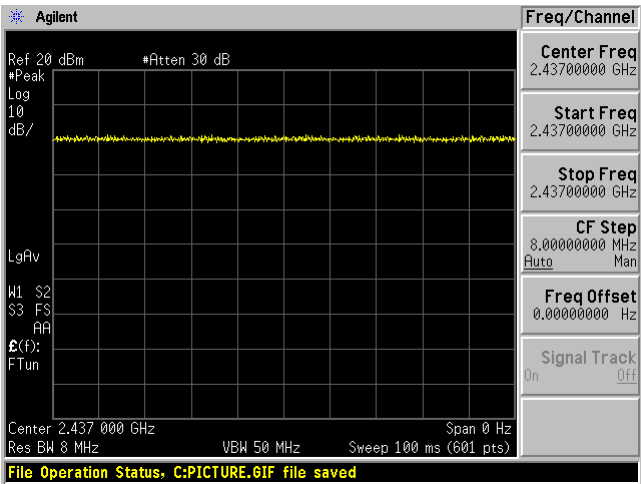

BLE

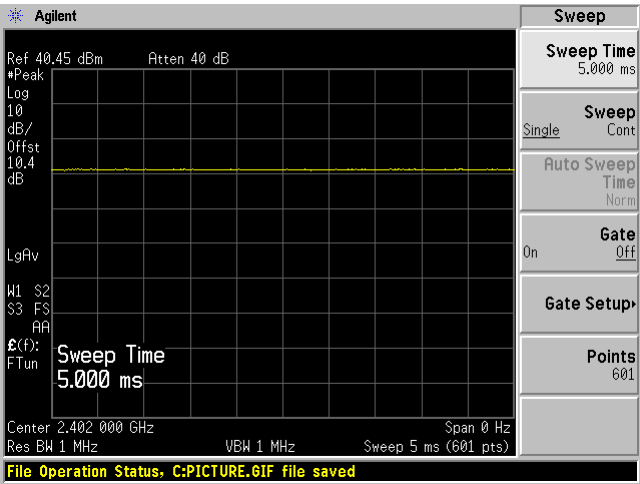

2.4 Equipment Modifications

No equipment modifications were made to the EUT.

2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Laptop	Latitude E6410	3CKRAQ1

2.6 Support Equipment

Manufacturer	Description	Model
Roku, Inc.	Debug Board	

2.7 Power Supply/Adapter

Eut was was powered by an extension cable for testing.

2.8 Interface Ports and Cabling

Cable Description	Length (m)	To	From
RF Cable	< 1m	EUT	PSA
Power Extension Cord	< 1m	EUT	Outlet
USB Type-A to USB Type B	< 1m	Laptop	Debug Board

3 Summary of Test Results

Results reported relate only to the product tested.

FCC Rules	Description of Test	Results
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207	AC Line Conducted Emissions	Compliant
§2.1091, §15.247(i)	RF Exposure	Compliant
FCC §2.1051, §15.247 (d)	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2)	6 dB and 99% Emission Bandwidth	Compliant
FCC §15.247(b)(3)	Maximum Peak Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant

4 FCC §15.203 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

4.2 Antenna Description

The antennas used by the EUT are permanent attached antennas. The following antenna specifications were provided by the applicant.

Radio	Antenna usage	Band of Operation (GHz)	Maximum Antenna Gain (dBi)
Radio 1	Wi-Fi	2400-2483.5	1.8
	Wi-Fi	5000-6000	2.6
Radio 2	Wi-Fi	2400-2483.5	1.8
	Wi-Fi	5000-6000	2.6

Antenna usage	Band of Operation (GHz)	Maximum Antenna Gain (dBi)
Bluetooth	2400-2483.5	1.8

5 FCC §2.1091, §15.247(i)– RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 MPE Results

Radio 1**5 GHz Wi-Fi**

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>21.91</u>
<u>Tuned up maximum output power at antenna input terminal (dBm):</u>	<u>22.91</u>
<u>Tuned up maximum output power at antenna input terminal (mW):</u>	<u>195.4339</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>5745</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.6</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.82</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.0708</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0708 mW/cm². Limit is 1.0 mW/cm².

2.4 GHz Wi-Fi

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>22.47</u>
<u>Tuned up maximum output power at antenna input terminal (dBm):</u>	<u>23.47</u>
<u>Tuned up maximum output power at antenna input terminal (mW):</u>	<u>222.331</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2437</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>1.8</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.51</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.0670</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0670 mW/cm². Limit is 1.0 mW/cm².

Radio 2**5 GHz Wi-Fi**

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>19.18</u>
<u>Tuned up maximum output power at antenna input terminal (dBm):</u>	<u>20.18</u>
<u>Tuned up maximum output power at antenna input terminal (mW):</u>	<u>104.232</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>5745</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.6</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.82</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.0378</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0378 mW/cm². Limit is 1.0 mW/cm².

2.4 GHz Wi-Fi

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>22.02</u>
<u>Tuned up maximum output power at antenna input terminal (dBm):</u>	<u>23.02</u>
<u>Tuned up maximum output power at antenna input terminal (mW):</u>	<u>200.45</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2412</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>1.8</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.51</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.0604</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0604 mW/cm². Limit is 1.0 mW/cm².

2.4 GHz Classic Bluetooth

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>12.81</u>
<u>Tuned up maximum output power at antenna input terminal (dBm):</u>	<u>13.81</u>
<u>Tuned up maximum output power at antenna input terminal (mW):</u>	<u>24.04</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2402</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>1.8</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.51</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.00724</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.00724mW/cm². Limit is 1.0 mW/cm².

Worst case colocation Radio 1 5 GHz Wi-Fi, Radio 2 2.4 GHz Wi-Fi and 2.4 GHz Classic Bluetooth:

Frequency Band	Tuned up Max Conducted Power(dBm)	Evaluated Distance (cm)	Worst-Case MPE (mW/cm ²)	MPE Limit (mW/cm ²)	Worst-Case MPE Ratios	Sum of MPE Ratios	Limit
Worst Case							
Radio 1 5 GHz WiFi	22.91	20	0.0708	1.0	7.08%	13.844%	100%
Radio 2 2.4 GHz WiFi	23.02	20	0.0604	1.0	6.04%		
2.4 GHz Classic BT	13.81	20	0.00724	1.0	0.724%		

6 FCC §15.207 - AC Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.1 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

6.2 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

6.3 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.4 Test Setup Block Diagram

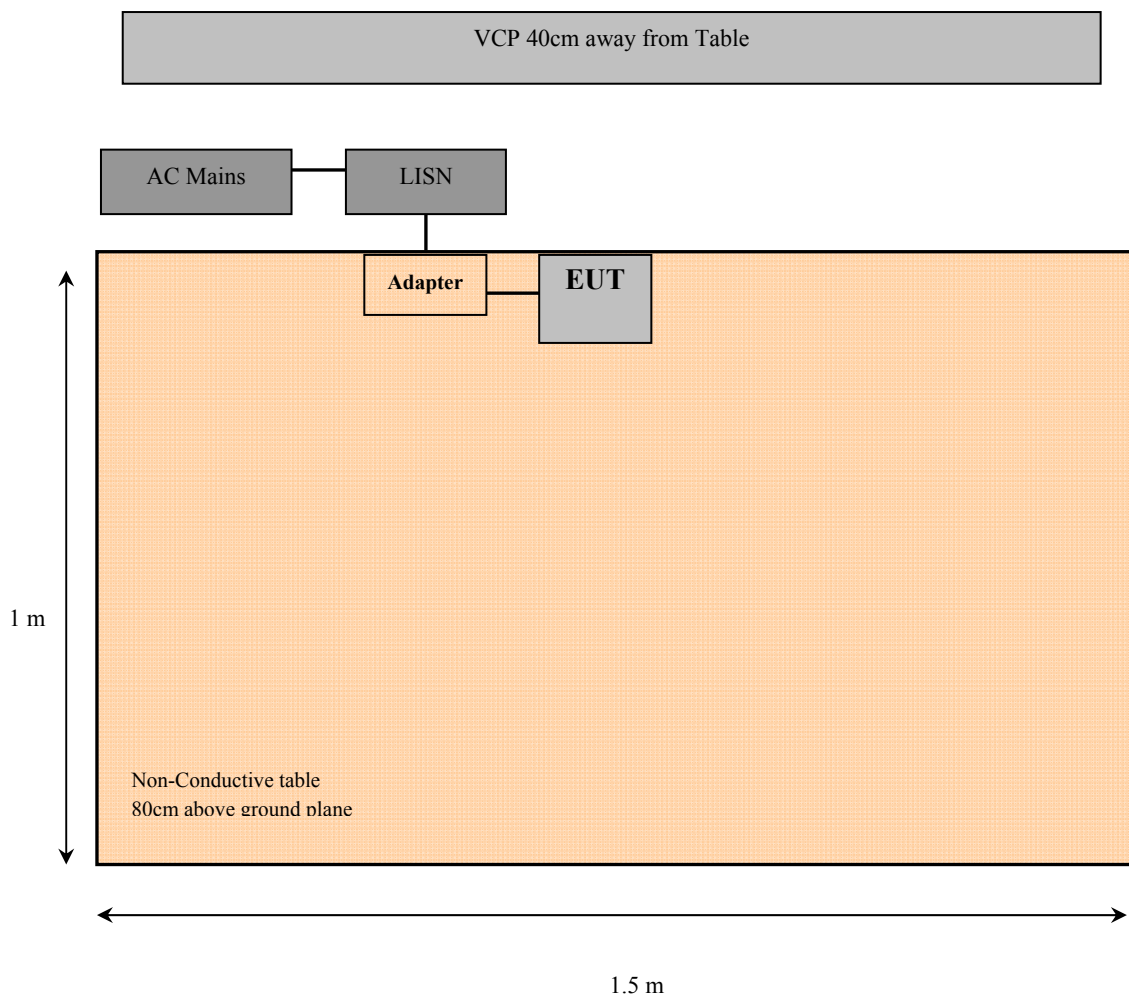

6.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2017-09-18	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2018-07-28	1 year
Keysight Technologies	RF Limiter	11867A	MY42242931	2018-09-04	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150202	2019-02-25	1 year
Fairview Microwave	Micro-Coaxial Cable	FMC0101223-360	102515	2019-07-18	1 year
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160130	2019-04-11	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

6.6 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Corey Phan on 2019-07-23 in the outside emission test site.

6.7 Summary of Test Results


According to the recorded data in following table, the EUT complied with the FCC 15C's conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-8.05	0.383621	Line	0.15-30

6.8 Conducted Emissions Test Plots and Data

2.4 GHz Wi-Fi, b mode, 2437 MHz Radio 1; 2.4GHz Wi-Fi b mode, 5240 MHz Radio 2 and 2.4 GHz Classic Bluetooth $\pi/4$ -DQPSK (2402 MHz)


120 V, 60 Hz – Line

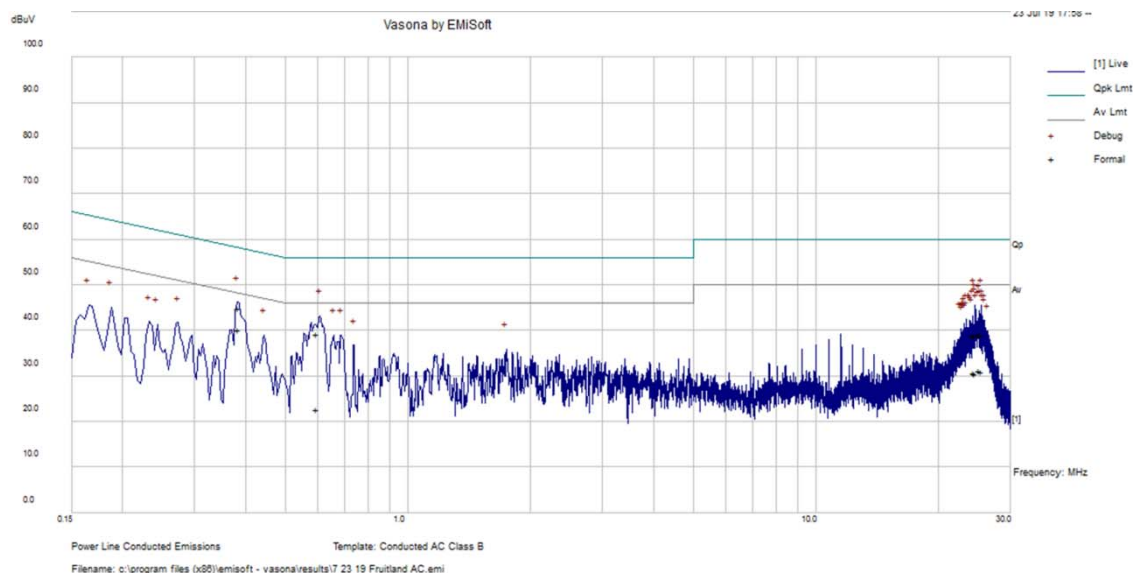

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.383621	44.97	Line	58.2	-13.23	QP
0.599975	39.27	Line	56	-16.73	QP
24.452059	38.91	Line	60	-21.09	QP
25.424853	38.89	Line	60	-21.11	QP
24.58086	38.7	Line	60	-21.3	QP
25.144369	39.28	Line	60	-20.72	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.383621	40.16	Line	48.2	-8.05	Ave
0.599975	22.68	Line	46	-23.32	Ave
24.452059	30.62	Line	50	-19.38	Ave
25.424853	30.99	Line	50	-19.01	Ave
24.58086	30.49	Line	50	-19.51	Ave
25.144369	31.11	Line	50	-18.89	Ave

120 V, 60 Hz – Neutral

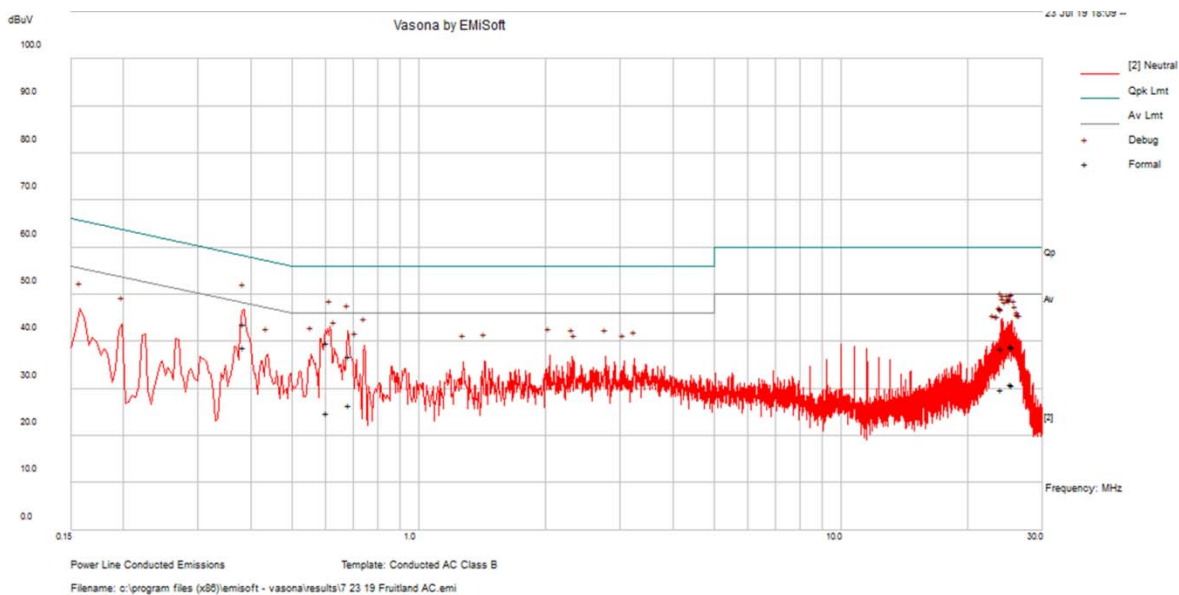

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.385157	43.68	Neutral	58.17	-14.49	QP
0.604324	39.6	Neutral	56	-16.4	QP
0.685075	36.77	Neutral	56	-19.23	QP
23.994903	38.56	Neutral	60	-21.44	QP
25.398756	38.75	Neutral	60	-21.25	QP
25.336248	38.9	Neutral	60	-21.1	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.385157	38.76	Neutral	48.17	-9.4	Ave
0.604324	24.9	Neutral	46	-21.1	Ave
0.685075	26.5	Neutral	46	-19.5	Ave
23.994903	29.79	Neutral	50	-20.21	Ave
25.398756	30.76	Neutral	50	-19.24	Ave
25.336248	30.88	Neutral	50	-19.12	Ave

7 FCC §15.209, §15.247(d) - Spurious Radiated Emissions

7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

(1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto

(2) Average: RBW = 1MHz / VBW = 10Hz or 1/T / Sweep = Auto

7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100044	2018-10-26	2 years
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-19	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2018-02-26	2 years
EMCO	Antenna, Horn	3115	9511-4627	2018-03-28	2 years
Agilent	Amplifier, Pre	8447D	2443A04374	2018-08-13	1 year
AH Systems	Pre-Amplifier 18-40GHz	PAM-1840VH	170	2018-09-10	1 year
Insulated Wire INC	157 Series 2.92 SM (x2) Armored 33 ft. Cable	KPS-1501AN-3960-KPS	DC 1807	2018-03-13	2 years
-	SMA cable	-	C0002	Each time ¹	N/A
HP/Agilent	Pre-Amplifier	8449B	3008A01978	2018-08-17	1 year
Wisewave	Antenna, Horn 18-26.5GHz	ARH-4223-02	10555-02	2017-12-15	2 years
Wisewave	Antenna, Horn 26.5-40GHz	ARH-2823-02	10555-01	2017-09-18	2 years
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2019-04-02	2 years
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

7.6 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig from 2019-07-03 to 2019-07-22 in 5 m chamber 3.

7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C standard's radiated emissions limits, and had the worst margin of:

Radio 2:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, channel
-0.449	2390	Vertical	g, 2412 MHz

Radio 1:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, channel
-0.420	2483.5	Horizontal	n20, 2462 MHz

BLE:


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel
-11.37	7320	Vertical	2440 MHz

Please refer to the following table and plots for specific test result details

7.8 Radiated Emissions Test Results

1) 30 MHz – 1 GHz

Worst Case Colocation, Radio 1-2.4 GHz Wi-Fi b mode (2437 MHz), Radio 2-2.4 GHz Wi-Fi b mode (2412 MHz) and 2.4 GHz Classic Bluetooth $\pi/4$ -DQPSK (2402 MHz)

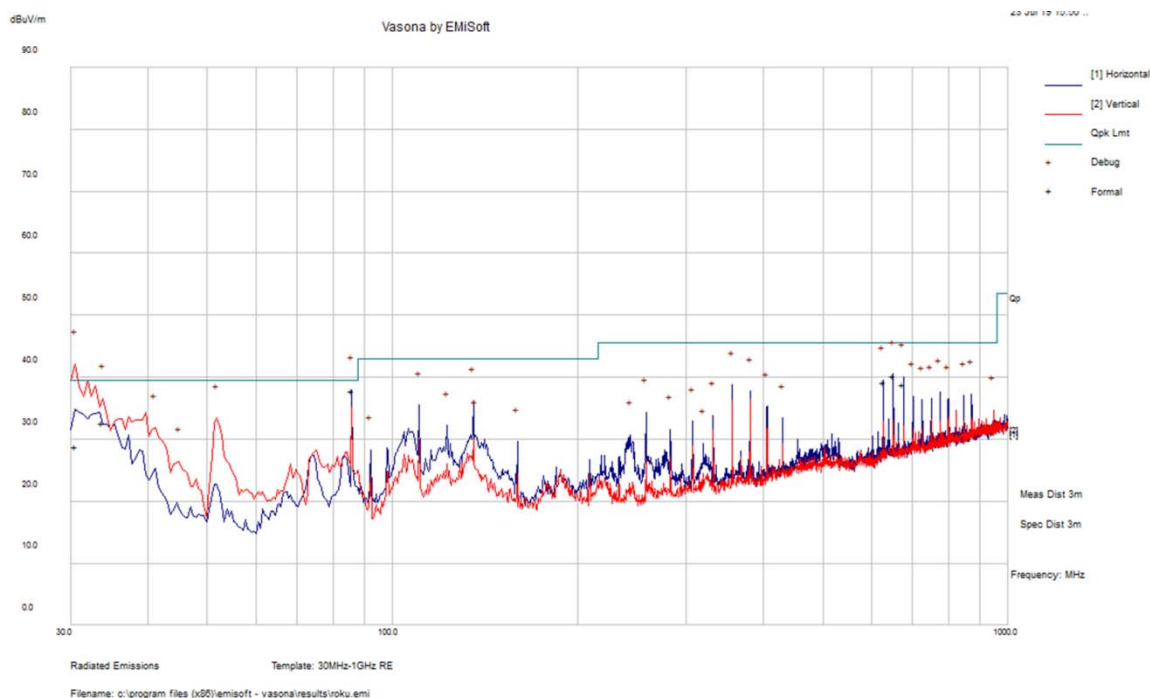

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
30.5395	28.85	121	V	81	39.5	-10.65	QP
86.00775	37.9	238	H	0	39.5	-1.6	QP
33.75925	32.69	145	V	90	39.5	-6.81	QP
651.25025	40.28	104	H	340	45.5	-5.22	QP
675.846	38.82	105	H	130	45.5	-6.68	QP
626.68575	39.17	117	H	356	45.5	-6.33	QP

2) 1–18 GHz Measured at 3 meters

RADIO 2

802.11b mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	29.24	254	125	H	28.865	5.051		63.156	74	-10.844	PK
2390	17.3	254	125	H	28.865	5.051		51.216	54	-2.784	AV
2390	28.55	319	179	V	28.890	5.051		62.491	74	-11.509	PK
2390	16.88	319	179	V	28.890	5.051		50.821	54	-3.179	AV
4824	49.64	348	159	H	33.135	10.354	35.655	57.474	74	-16.526	PK
4824	43.56	348	159	H	33.135	10.354	35.655	51.394	54	-2.606	AV
4824	47.42	358	109	V	33.135	10.354	35.655	55.254	74	-18.746	PK
4824	38.84	358	109	V	33.135	10.354	35.655	46.674	54	-7.326	AV
Mid Channel 2437 MHz											
4874	49.65	11	106	H	33.599	8.516	35.655	56.110	74	-17.890	PK
4874	44.04	11	106	H	33.599	8.516	35.655	50.500	54	-3.500	AV
4874	50.65	14	106	V	33.599	8.516	35.655	57.110	74	-16.890	PK
4874	44.75	14	106	V	33.599	8.516	35.655	51.210	54	-2.790	AV
7311	48.71	0	189	H	37.075	10.757	35.275	61.267	74	-12.733	PK
7311	39.23	0	189	H	37.075	10.757	35.275	51.787	54	-2.213	AV
7311	48.93	40	101	V	37.043	10.757	35.275	61.455	74	-12.545	PK
7311	40.45	40	101	V	37.043	10.757	35.275	52.975	54	-1.025	AV
High Channel 2462 MHz											
2483.5	27.77	211	255	H	29.169	5.171		62.110	74	-11.890	PK
2483.5	13.48	211	255	H	29.169	5.171		47.820	54	-6.180	AV
2483.5	27.99	210	145	V	29.095	5.171		62.256	74	-11.744	PK
2483.5	17.55	210	145	V	29.095	5.171		51.816	54	-2.184	AV
4924	48.62	321	110	H	33.599	8.516	35.655	55.080	74	-18.920	PK
4924	42.51	321	110	H	33.599	8.516	35.655	48.970	54	-5.030	AV
4924	47.93	28	130	V	33.599	8.516	35.655	54.390	74	-19.610	PK
4924	39.78	28	130	V	33.599	8.516	35.655	46.240	54	-7.760	AV
7386	45.71	0	100	H	37.401	12.757	35.67	60.198	74	-13.802	PK
7386	35.42	0	100	H	37.401	12.757	35.67	49.908	54	-4.092	AV
7386	47.14	163	107	V	37.401	12.757	35.67	61.628	74	-12.372	PK
7386	38.12	163	107	V	37.401	12.757	35.67	52.608	54	-1.392	AV

802.11g mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	35.45	254	126	H	28.865	5.051		69.366	74	-4.634	PK
2390	19.26	254	126	H	28.865	5.051		53.176	54	-0.824	AV
2390	35.67	360	107	V	28.89	5.051		69.611	74	-4.389	PK
2390	19.61	360	107	V	28.89	5.051		53.551	54	-0.449	AV
4824	45.37	0	100	H	33.135	10.354	35.655	53.204	74	-20.796	PK
4824	32.85	0	100	H	33.135	10.354	35.655	40.684	54	-13.316	AV
4824	44.9	0	100	V	33.135	10.354	35.655	52.734	74	-21.266	PK
4824	32.41	0	100	V	33.135	10.354	35.655	40.244	54	-13.756	AV
Mid Channel 2437 MHz											
4874	45.56	0	100	H	33.599	8.516	35.655	52.020	74	-21.980	PK
4874	31.24	0	100	H	33.599	8.516	35.655	37.700	54	-16.300	AV
4874	45.9	0	100	V	33.599	8.516	35.655	52.360	74	-21.640	PK
4874	31.23	0	100	V	33.599	8.516	35.655	37.690	54	-16.310	AV
7311	50.71	0	100	H	37.075	10.757	35.275	63.267	74	-10.733	PK
7311	31.76	0	100	H	37.075	10.757	35.275	44.317	54	-9.683	AV
7311	45.73	0	100	V	37.043	10.757	35.275	58.255	74	-15.745	PK
7311	30.85	0	100	V	37.043	10.757	35.275	43.375	54	-10.625	AV
High Channel 2462 MHz											
2483.5	30.700	264	145	H	29.169	5.171		65.040	74	-8.960	PK
2483.5	19.120	264	145	H	29.169	5.171		53.460	54	-0.540	AV
2483.5	34.580	353	104	V	29.095	5.171		68.846	74	-5.154	PK
2483.5	17.990	353	104	V	29.095	5.171		52.256	54	-1.744	AV
4924	45.520	0	100	H	33.599	8.516	35.655	51.980	74	-22.020	PK
4924	32.570	0	100	H	33.599	8.516	35.655	39.030	54	-14.970	AV
4924	44.800	0	100	V	33.599	8.516	35.655	51.260	74	-22.740	PK
4924	32.150	0	100	V	33.599	8.516	35.655	38.610	54	-15.390	AV
7386	44.190	0	100	H	37.401	12.757	35.670	58.678	74	-15.322	PK
7386	31.720	0	100	H	37.401	12.757	35.670	46.208	54	-7.792	AV
7386	44.530	0	100	V	37.401	12.757	35.670	59.018	74	-14.982	PK
7386	31.310	0	100	V	37.401	12.757	35.670	45.798	54	-8.202	AV

802.11n20 mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	34.32	28	270	H	28.865	5.051		68.236	74	-5.764	PK
2390	16.95	28	270	H	28.865	5.051		50.866	54	-3.134	AV
2390	37.25	360	105	V	28.89	5.051		71.191	74	-2.809	PK
2390	19.45	360	105	V	28.89	5.051		53.391	54	-0.609	AV
4824	45.25	0	100	H	33.135	10.354	35.655	53.084	74	-20.916	PK
4824	32.2	0	100	H	33.135	10.354	35.655	40.034	54	-13.966	AV
4824	44.41	0	100	V	33.135	10.354	35.655	52.244	74	-21.756	PK
4824	31.91	0	100	V	33.135	10.354	35.655	39.744	54	-14.256	AV
Mid Channel 2437 MHz											
4874	44.28	0	100	H	33.599	8.516	35.655	50.740	74	-23.260	PK
4874	29.8	0	100	H	33.599	8.516	35.655	36.260	54	-17.740	AV
4874	44.35	0	100	V	33.599	8.516	35.655	50.810	74	-23.190	PK
4874	29.77	0	100	V	33.599	8.516	35.655	36.230	54	-17.770	AV
7311	44.64	0	100	H	37.075	10.757	35.275	57.197	74	-16.803	PK
7311	30.11	0	100	H	37.075	10.757	35.275	42.667	54	-11.333	AV
7311	45.24	0	100	V	37.043	10.757	35.275	57.765	74	-16.235	PK
7311	30.2	0	100	V	37.043	10.757	35.275	42.725	54	-11.275	AV
High Channel 2462 MHz											
2483.5	35.91	265	152	H	29.169	5.171		70.250	74	-3.750	PK
2483.5	18.86	265	152	H	29.169	5.171		53.200	54	-0.800	AV
2483.5	35.32	355	161	V	29.095	5.171		69.586	74	-4.414	PK
2483.5	18.55	355	161	V	29.095	5.171		52.816	54	-1.184	AV
4924	45.83	0	100	H	33.599	8.516	35.655	52.290	74	-21.710	PK
4924	32.75	0	100	H	33.599	8.516	35.655	39.210	54	-14.790	AV
4924	45.59	0	100	V	33.599	8.516	35.655	52.050	74	-21.950	PK
4924	31.93	0	100	V	33.599	8.516	35.655	38.390	54	-15.610	AV
7386	45.2	0	100	H	37.401	12.757	35.67	59.688	74	-14.312	PK
7386	32.08	0	100	H	37.401	12.757	35.67	46.568	54	-7.432	AV
7386	44.77	0	100	V	37.401	12.757	35.67	59.258	74	-14.742	PK
7386	21.84	0	100	V	37.401	12.757	35.67	36.328	54	-17.672	AV

RADIO 1**802.11b mode**

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	31.21	162	126	H	28.865	5.051		65.126	74	-8.874	PK
2390	19.31	162	126	H	28.865	5.051		53.226	54	-0.774	AV
2390	30.42	142	270	V	28.89	5.051		64.361	74	-9.639	PK
2390	16	142	270	V	28.89	5.051		49.941	54	-4.059	AV
4824	46.18	348	159	H	33.135	10.354	35.655	54.014	74	-19.986	PK
4824	32.66	348	159	H	33.135	10.354	35.655	40.494	54	-13.506	AV
4824	45.61	358	109	V	33.135	10.354	35.655	53.444	74	-20.556	PK
4824	33.32	358	109	V	33.135	10.354	35.655	41.154	54	-12.846	AV
Mid Channel 2437 MHz											
4874	44.81	0	100	H	33.599	8.516	35.655	51.270	74	-22.730	PK
4874	32.33	0	100	H	33.599	8.516	35.655	38.790	54	-15.210	AV
4874	44.9	321	168	V	33.599	8.516	35.655	51.360	74	-22.640	PK
4874	32.94	321	168	V	33.599	8.516	35.655	39.400	54	-14.600	AV
7311	47.75	337	112	H	37.075	10.757	35.275	60.307	74	-13.693	PK
7311	36.85	337	112	H	37.075	10.757	35.275	49.407	54	-4.593	AV
7311	49.33	310	194	V	37.043	10.757	35.275	61.855	74	-12.145	PK
7311	40.38	310	194	V	37.043	10.757	35.275	52.905	54	-1.095	AV
High Channel 2462 MHz											
2483.5	32.25	167	150	H	29.169	5.171		66.590	74	-7.410	PK
2483.5	19.2	167	150	H	29.169	5.171		53.540	54	-0.460	AV
2483.5	30.87	139	100	V	29.095	5.171		65.136	74	-8.864	PK
2483.5	16.64	139	100	V	29.095	5.171		50.906	54	-3.094	AV
4924	44.77	0	100	H	33.599	8.516	35.655	51.230	74	-22.770	PK
4924	30.11	0	100	H	33.599	8.516	35.655	36.570	54	-17.430	AV
4924	47.93	330	220	V	33.599	8.516	35.655	54.390	74	-19.610	PK
4924	30.95	330	220	V	33.599	8.516	35.655	37.410	54	-16.590	AV
7386	45.17	0	100	H	37.401	12.757	35.67	59.658	74	-14.342	PK
7386	31.38	0	100	H	37.401	12.757	35.67	45.868	54	-8.132	AV
7386	44.71	163	107	V	37.401	12.757	35.67	59.198	74	-14.802	PK
7386	31.03	163	107	V	37.401	12.757	35.67	45.518	54	-8.482	AV

802.11g mode



Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	37.35	254	126	H	28.865	5.051		71.266	74	-2.734	PK
2390	19.12	254	126	H	28.865	5.051		53.036	54	-0.964	AV
2390	34.4	360	107	V	28.89	5.051		68.341	74	-5.659	PK
2390	17.05	360	107	V	28.89	5.051		50.991	54	-3.009	AV
4824	45.21	0	100	H	33.135	10.354	35.655	53.044	74	-20.956	PK
4824	30.16	0	100	H	33.135	10.354	35.655	37.994	54	-16.006	AV
4824	44.57	0	100	V	33.135	10.354	35.655	52.404	74	-21.596	PK
4824	31.18	0	100	V	33.135	10.354	35.655	39.014	54	-14.986	AV
Mid Channel 2437 MHz											
4874	44.08	0	100	H	33.599	8.516	35.655	50.540	74	-23.460	PK
4874	30	0	100	H	33.599	8.516	35.655	36.460	54	-17.540	AV
4874	44.49	0	100	V	33.599	8.516	35.655	50.950	74	-23.050	PK
4874	30.02	0	100	V	33.599	8.516	35.655	36.480	54	-17.520	AV
7311	46.17	0	100	H	37.075	10.757	35.275	58.727	74	-15.273	PK
7311	32.44	0	100	H	37.075	10.757	35.275	44.997	54	-9.003	AV
7311	48.17	309	194	V	37.043	10.757	35.275	60.695	74	-13.305	PK
7311	33.31	309	194	V	37.043	10.757	35.275	45.835	54	-8.165	AV
High Channel 2462 MHz											
2483.5	37.16	215	220	H	29.169	5.171		71.500	74	-2.500	PK
2483.5	19.19	215	220	H	29.169	5.171		53.530	54	-0.470	AV
2483.5	34.78	240	250	V	29.095	5.171		69.046	74	-4.954	PK
2483.5	17.27	240	250	V	29.095	5.171		51.536	54	-2.464	AV
4924	44.98	0	100	H	33.599	8.516	35.655	51.440	74	-22.560	PK
4924	30.45	0	100	H	33.599	8.516	35.655	36.910	54	-17.090	AV
4924	45.89	0	100	V	33.599	8.516	35.655	52.350	74	-21.650	PK
4924	30.46	0	100	V	33.599	8.516	35.655	36.920	54	-17.080	AV
7386	45.01	0	100	H	37.401	12.757	35.67	59.498	74	-14.502	PK
7386	30.15	0	100	H	37.401	12.757	35.67	44.638	54	-9.362	AV
7386	45.02	0	100	V	37.401	12.757	35.67	59.508	74	-14.492	PK
7386	30.3	0	100	V	37.401	12.757	35.67	44.788	54	-9.212	AV

802.11n20 mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2390	38.83	28	270	H	28.865	5.051		72.746	74	-1.254	PK
2390	17.6	28	270	H	28.865	5.051		51.516	54	-2.484	AV
2390	39.11	303	123	V	28.89	5.051		73.051	74	-0.949	PK
2390	17.96	303	123	V	28.89	5.051		51.901	54	-2.099	AV
4824	44.66	0	100	H	33.135	10.354	35.655	52.494	74	-21.506	PK
4824	30.31	0	100	H	33.135	10.354	35.655	38.144	54	-15.856	AV
4824	44.9	0	100	V	33.135	10.354	35.655	52.734	74	-21.266	PK
4824	30.31	0	100	V	33.135	10.354	35.655	38.144	54	-15.856	AV
Mid Channel 2437 MHz											
4874	43.81	0	100	H	33.599	8.516	35.655	50.270	74	-23.730	PK
4874	30.03	0	100	H	33.599	8.516	35.655	36.490	54	-17.510	AV
4874	44.36	0	100	V	33.599	8.516	35.655	50.820	74	-23.180	PK
4874	30.03	0	100	V	33.599	8.516	35.655	36.490	54	-17.510	AV
7311	44.44	0	100	H	37.075	10.757	35.275	56.997	74	-17.003	PK
7311	30.66	0	100	H	37.075	10.757	35.275	43.217	54	-10.783	AV
7311	45.84	0	100	V	37.043	10.757	35.275	58.365	74	-15.635	PK
7311	31.53	0	100	V	37.043	10.757	35.275	44.055	54	-9.945	AV
High Channel 2462 MHz											
2483.5	39.23	215	169	H	29.169	5.171		73.570	74	-0.430	PK
2483.5	19.24	215	169	H	29.169	5.171		53.580	54	-0.420	AV
2483.5	36.32	355	161	V	29.095	5.171		70.586	74	-3.414	PK
2483.5	17.43	355	161	V	29.095	5.171		51.696	54	-2.304	AV
4924	45.16	0	100	H	33.599	8.516	35.655	51.620	74	-22.380	PK
4924	30.05	0	100	H	33.599	8.516	35.655	36.510	54	-17.490	AV
4924	44.96	0	100	V	33.599	8.516	35.655	51.420	74	-22.580	PK
4924	30.04	0	100	V	33.599	8.516	35.655	36.500	54	-17.500	AV
7386	45.13	0	100	H	37.401	12.757	35.67	59.618	74	-14.382	PK
7386	30.11	0	100	H	37.401	12.757	35.67	44.598	54	-9.402	AV
7386	44.98	0	100	V	37.401	12.757	35.67	59.468	74	-14.532	PK
7386	30.02	0	100	V	37.401	12.757	35.67	44.508	54	-9.492	AV

BLE mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2402 MHz											
2390	48.76	232	112	H	28.87	5.73	36.16	47.19	74	-26.81	PK
2390	36.11	232	112	H	28.87	5.73	36.16	34.54	54	-19.46	AV
2390	50.44	33	115	V	28.89	5.73	36.16	48.90	74	-25.10	PK
2390	38.61	33	115	V	28.89	5.73	36.16	37.07	54	-16.93	AV
4804	45.99	28	168	H	32.46	8.40	35.90	50.94	74	-23.06	PK
4804	32.71	28	168	H	32.46	8.40	35.90	37.66	54	-16.34	AV
4804	46.75	345	170	V	32.45	8.40	35.90	51.70	74	-22.30	PK
4804	33.98	345	170	V	32.45	8.40	35.90	38.93	54	-15.07	AV
7206	44.88	0	100	H	36.90	10.56	35.25	57.09	74	-16.91	PK
7206	30.32	0	100	H	36.90	10.56	35.25	42.53	54	-11.47	AV
7206	44.70	0	100	V	36.75	10.56	35.25	56.77	74	-17.23	PK
7206	30.21	0	100	V	36.75	10.56	35.25	42.28	54	-11.72	AV
Mid Channel 2440 MHz											
4880	45.98	92	139	H	32.77	8.62	35.80	51.57	74	-22.43	PK
4880	33.34	29	139	H	32.77	8.62	35.80	38.93	54	-15.07	AV
4880	46.09	340	150	V	32.73	8.62	35.80	51.65	74	-22.35	PK
4880	33.45	340	150	V	32.73	8.62	35.80	39.01	54	-14.99	AV
7320	44.74	0	100	H	37.08	10.76	35.28	57.30	74	-16.70	PK
7320	30.14	0	100	H	37.08	10.76	35.28	42.70	54	-11.30	AV
7320	45.23	0	100	V	37.04	10.76	35.28	57.76	74	-16.25	PK
7320	30.11	0	100	V	37.04	10.76	35.28	42.64	54	-11.37	AV
High Channel 2480 MHz											
2483.5	50.77	105	195	H	28.87	5.73	36.16	49.20	74	-24.80	PK
2483.5	36.93	105	195	H	28.87	5.73	36.16	35.36	54	-18.64	AV
2483.5	50.50	340	200	V	28.89	5.73	36.16	48.96	74	-25.04	PK
2483.5	36.59	340	200	V	28.89	5.73	36.16	35.05	54	-18.95	AV
4960	46.30	90	155	H	32.73	8.81	35.73	52.12	74	-21.89	PK
4960	33.89	90	155	H	32.73	8.81	35.73	39.71	54	-14.30	AV
4960	47.22	342	155	V	32.74	8.81	35.73	53.04	74	-20.96	PK
4960	36.42	342	155	V	32.74	8.81	35.73	42.24	54	-11.76	AV
7440	44.06	0	100	H	37.09	10.94	35.33	56.76	74	-17.24	PK
7440	29.44	0	100	H	37.09	10.94	35.33	42.14	54	-11.86	AV
7440	44.08	0	100	V	37.07	10.94	35.33	56.76	74	-17.24	PK
7440	29.35	0	100	V	37.07	10.94	35.33	42.03	54	-11.97	AV

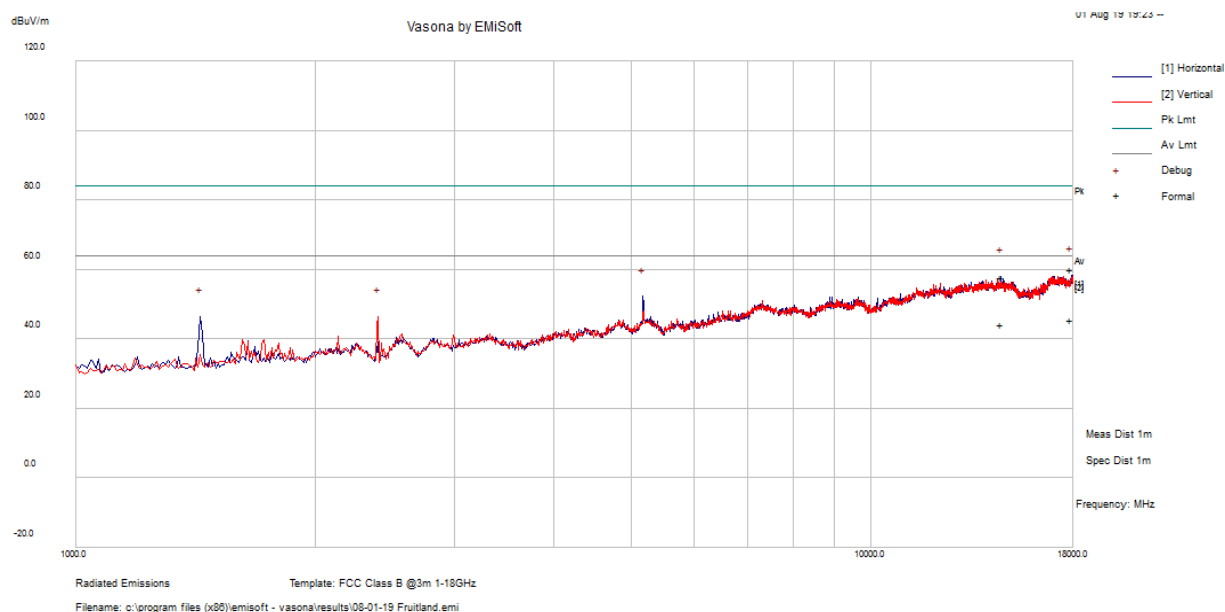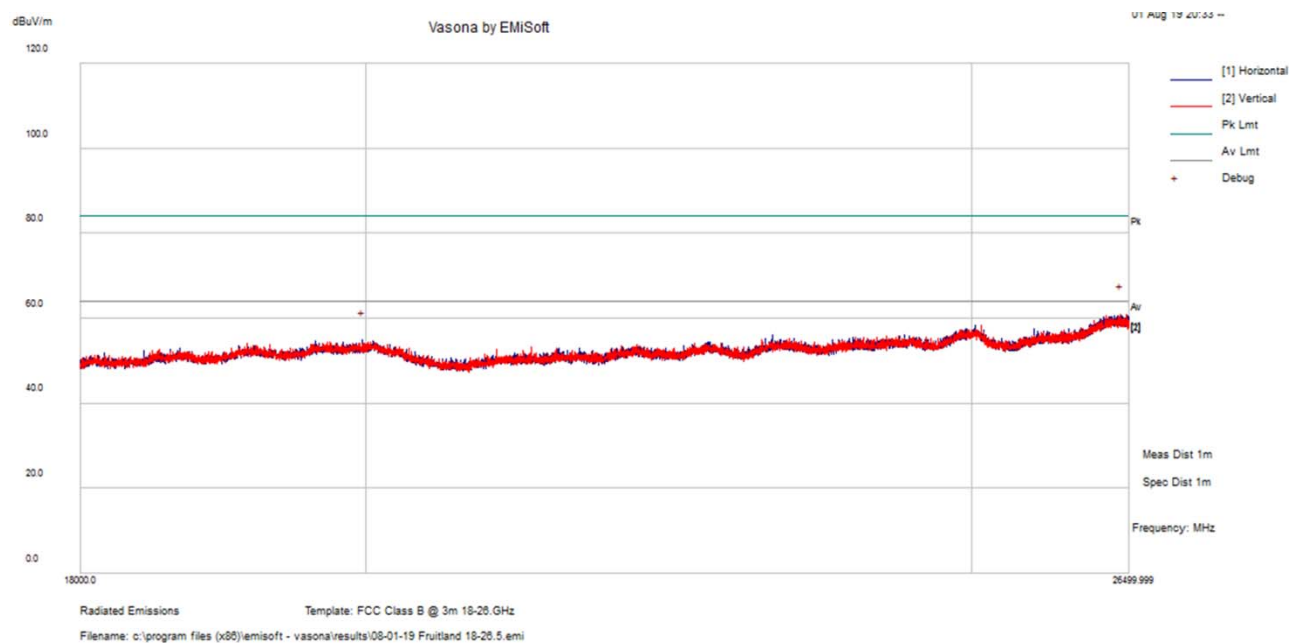1 GHz – 18 GHz Worst Case Scan at 1 meter*Worst Case Colocation, Radio 1-2.4 GHz Wi-Fi, Radio 2-2.4 GHz Wi-Fi and 2.4 GHz Classic Bluetooth***18 GHz – 26.5 GHz Worst Case Scan at 1 meter***Worst Case Colocation, Radio 1-2.4 GHz Wi-Fi, Radio 2-2.4 GHz Wi-Fi and 2.4 GHz Classic Bluetooth*

9 FCC §15.247(a)(2) -Emission Bandwidth

9.1 Applicable Standards

According to ECFR §15.247(a)(2), systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

9.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-06	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Zhao Zhao and Christian McCaig on 2019-07-09 and 2019-07-24 in RF site.

9.5 Test Results

Radio 2:

Channel	Frequency (MHz)	6 dB OBW (MHz)		99% OBW (MHz)		6 dB OBW Limit (kHz)	Result
		Antenna A	Antenna B	Antenna A	Antenna B		
802.11b							
Low	2412	9.151	10.136	13.5534	15.7343	≥ 500	Pass
Middle	2437	9.153	9.150	13.5773	13.4334	≥ 500	Pass
High	2462	9.155	9.154	13.5771	13.4782	≥ 500	Pass
802.11g							
Low	2412	16.544	16.549	16.6091	16.5401	≥ 500	Pass
Middle	2437	16.549	16.547	16.5732	16.5684	≥ 500	Pass
High	2462	16.563	16.548	16.5694	16.5641	≥ 500	Pass
802.11n20							
Low	2412	17.667	17.683	17.6749	18.0698	≥ 500	Pass
Middle	2437	17.671	17.671	17.6749	17.6268	≥ 500	Pass
High	2462	17.667	17.665	17.7386	17.6211	≥ 500	Pass
BLE							
Low	2422	776.573	-	1.0429	-	≥ 500	Pass
Middle	2437	778.118	-	1.0449	-	≥ 500	Pass
High	2452	778.119	-	1.0480	-	≥ 500	Pass


Radio 1:

Channel	Frequency (MHz)	6 dB OBW (MHz)	99% OBW (MHz)	6 dB OBW Limit (kHz)	Result
802.11b					
Low	2412	10.162	16.2051	≥ 500	Pass
Middle	2437	10.163	16.2883	≥ 500	Pass
High	2462	10.154	15.7112	≥ 500	Pass
802.11g					
Low	2412	16.550	16.6669	≥ 500	Pass
Middle	2437	16.553	16.6626	≥ 500	Pass
High	2462	16.571	16.5604	≥ 500	Pass
802.11n20					
Low	2412	17.688	17.7721	≥ 500	Pass
Middle	2437	17.683	17.7231	≥ 500	Pass
High	2462	17.685	17.6886	≥ 500	Pass


Please refer to the following plots for detailed test results.

RADIO 2 802.11b mode


Low Channel 6 dB OBW Antenna A

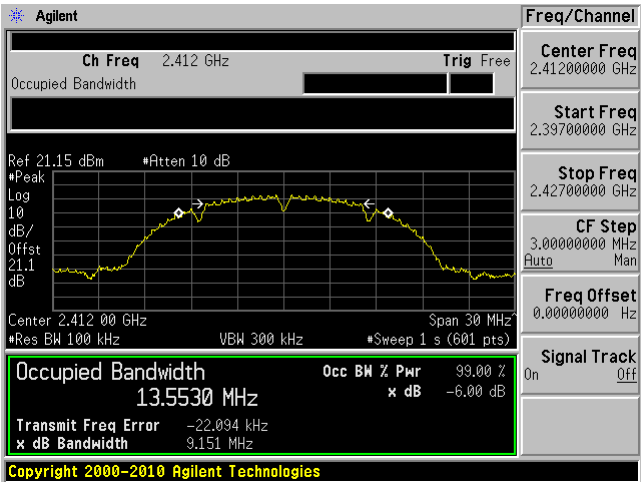


Low Channel 6 dB OBW Antenna B

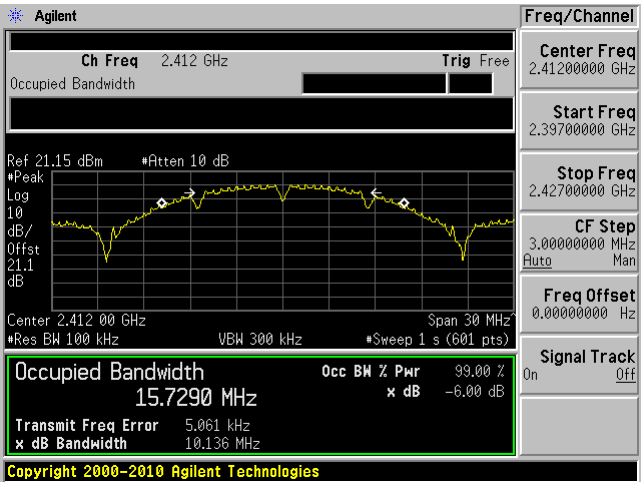


Low Channel 99% OBW Antenna A

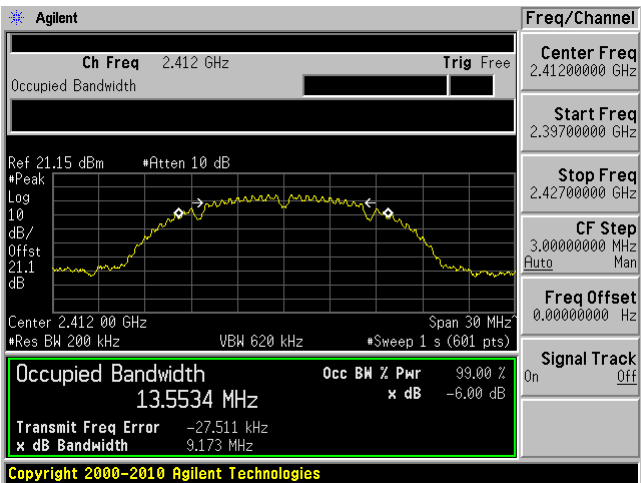


Low Channel 99% OBW Antenna B

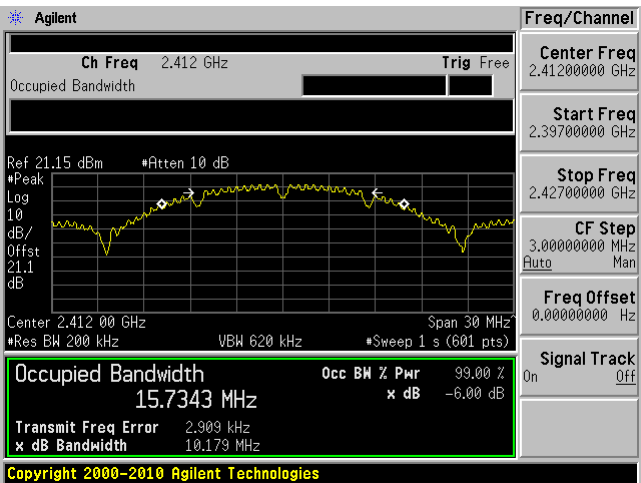


Mid Channel 6 dB OBW Antenna A

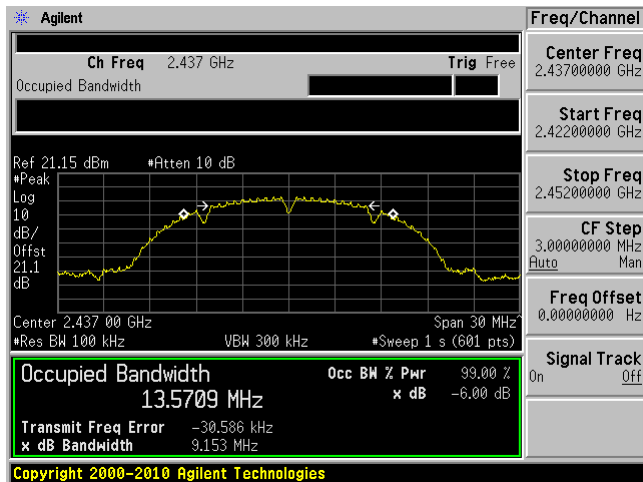


Mid Channel 6 dB OBW Antenna B

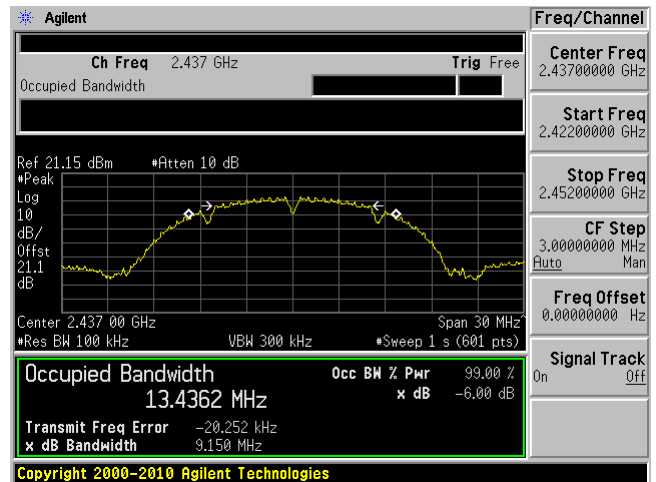


Mid Channel 99% OBW Antenna A

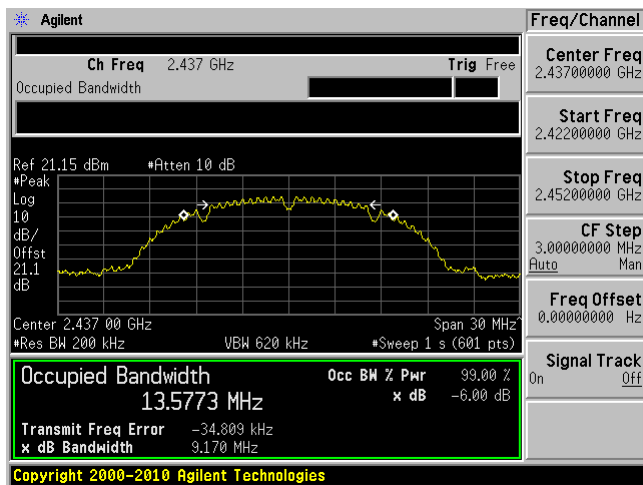


Mid Channel 99% OBW Antenna B

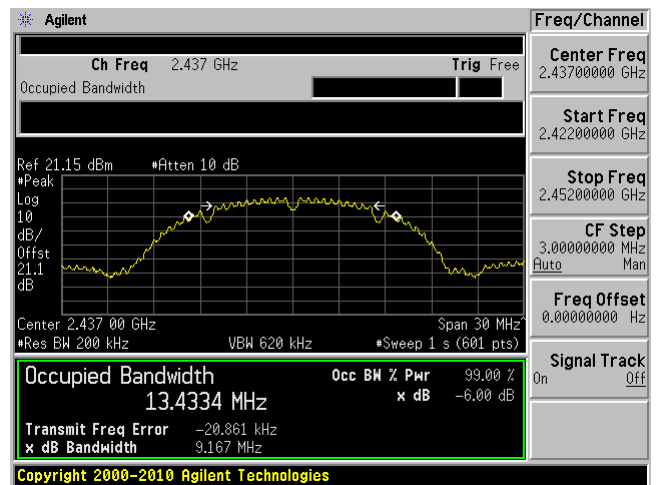


High Channel 6 dB OBW Antenna A

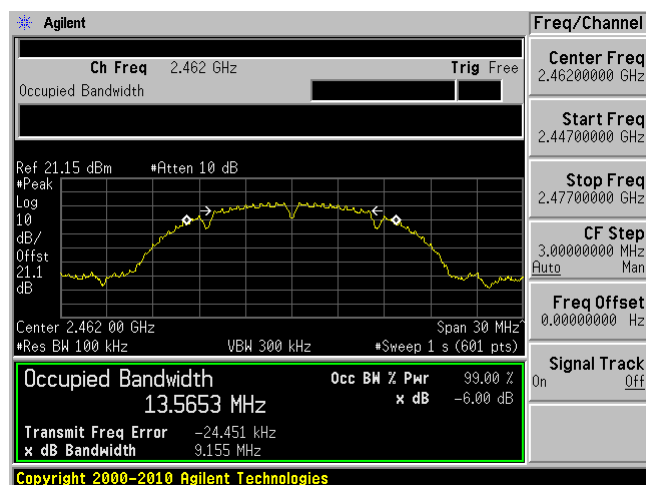


High Channel 6 dB OBW Antenna B

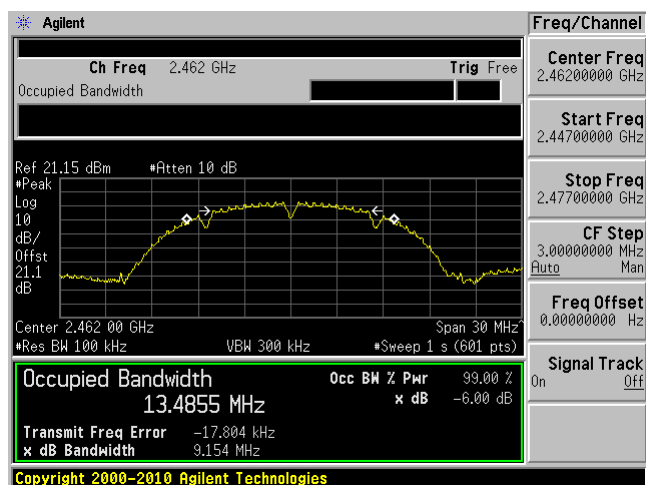

High Channel 99% OBW Antenna A

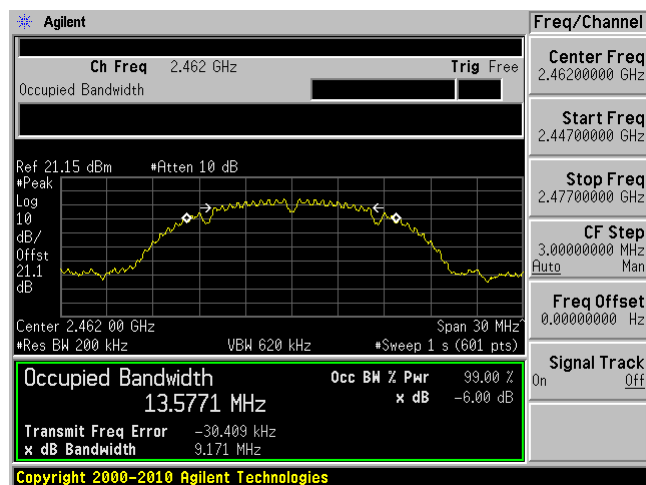


High Channel 99% OBW Antenna B

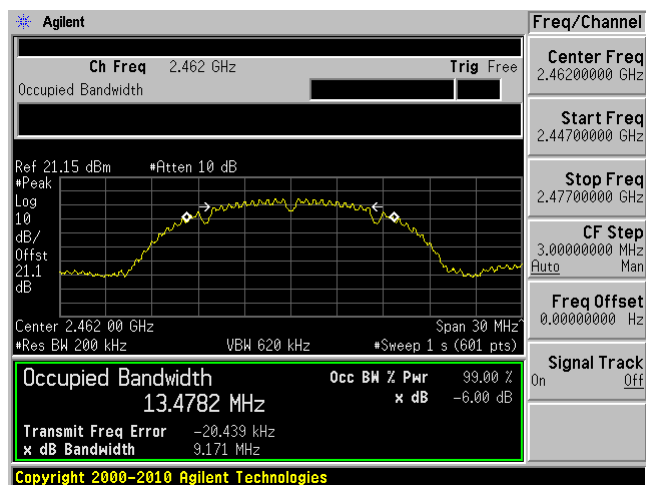


RADIO 2 802.11g mode


Low Channel 6 dB OBW Antenna A

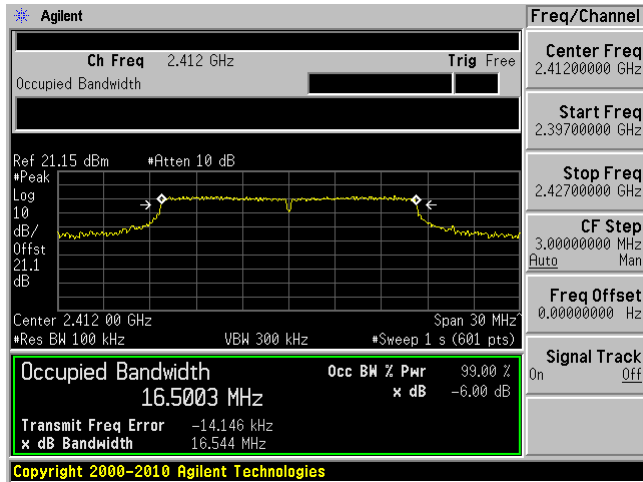


Low Channel 6 dB OBW Antenna B

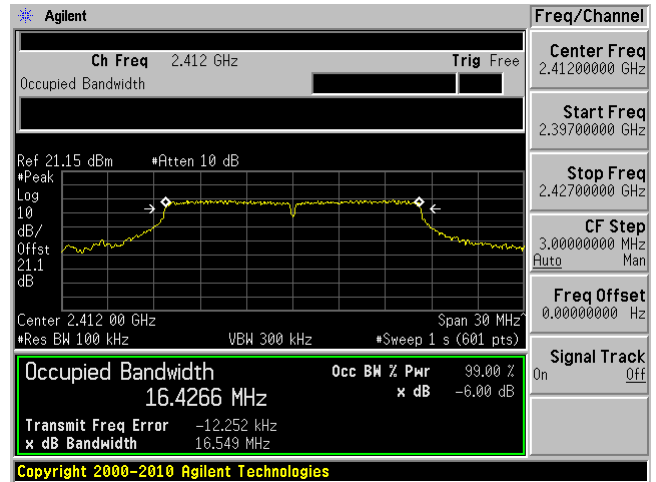


Low Channel 99% OBW Antenna A

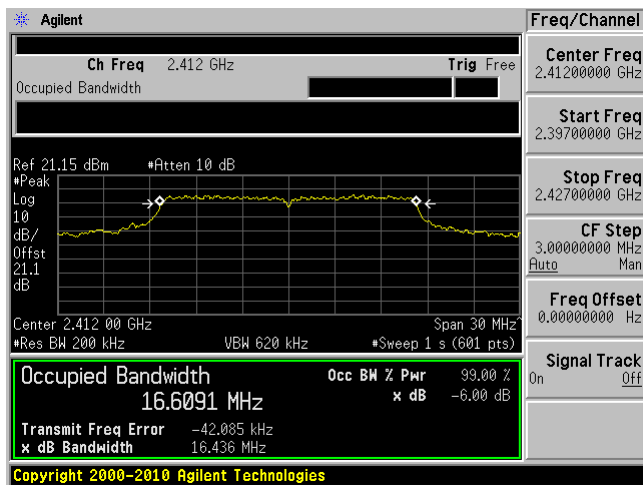


Low Channel 99% OBW Antenna B

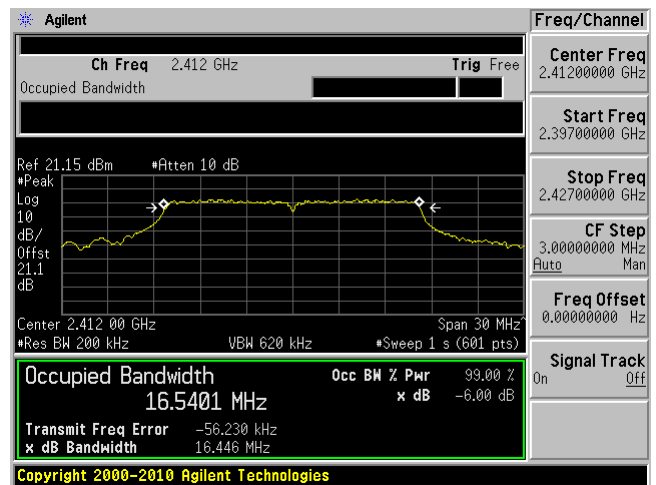


Mid Channel 6 dB OBW Antenna B

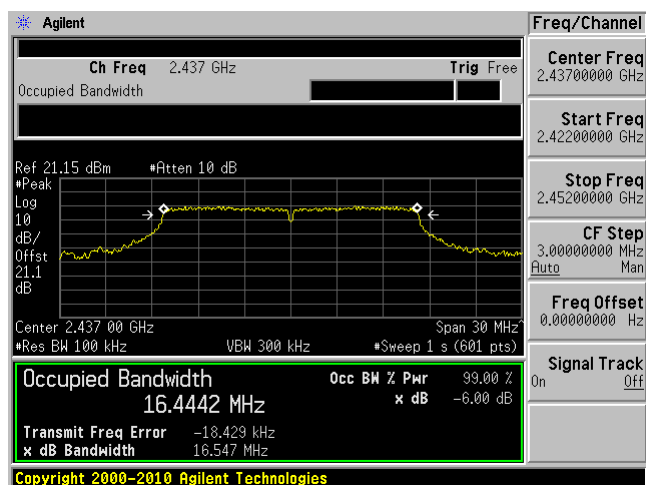


Mid Channel 99% OBW Antenna B

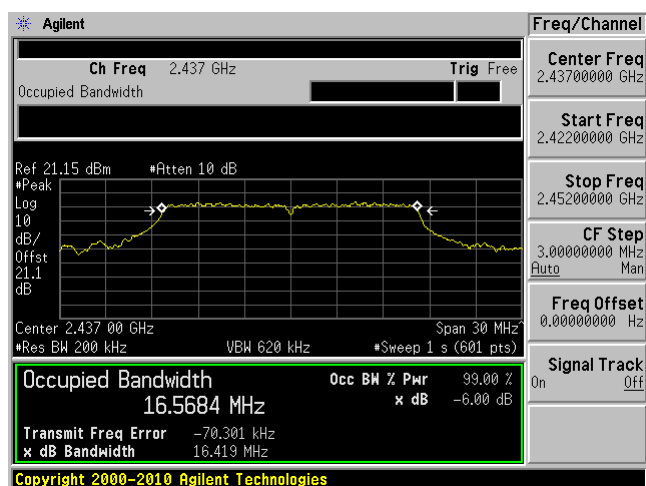


High Channel 6 dB OBW Antenna A

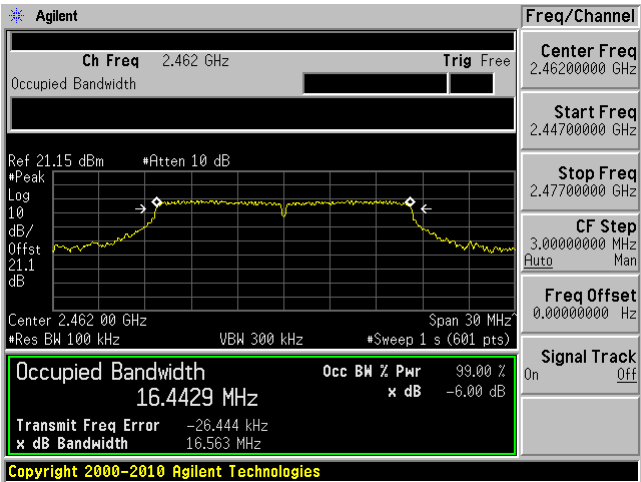


High Channel 6 dB OBW Antenna B

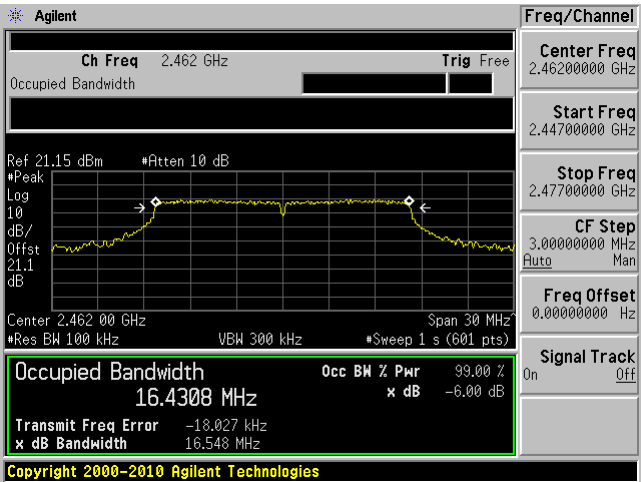

High Channel 99% OBW Antenna A

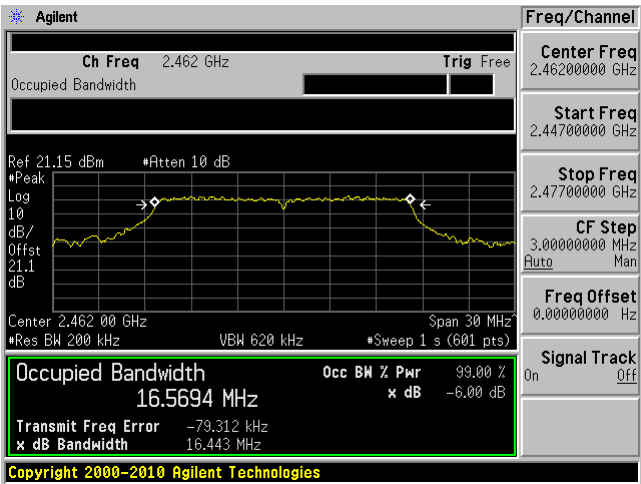


High Channel 99% OBW Antenna B

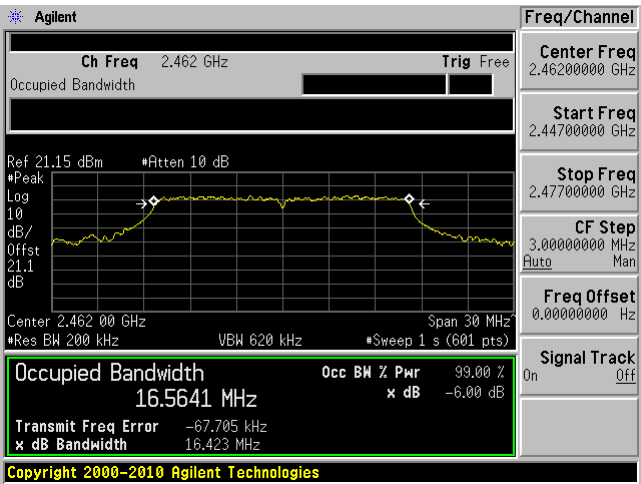


RADIO 2 802.11 n20 mode


Low Channel 6 dB OBW Antenna A

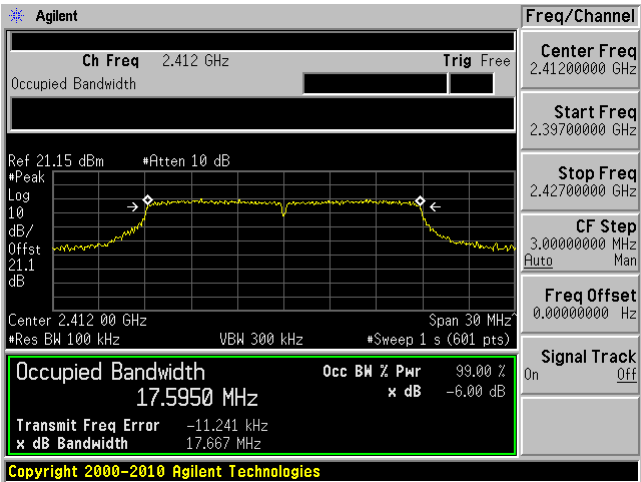


Low Channel 6 dB OBW Antenna B

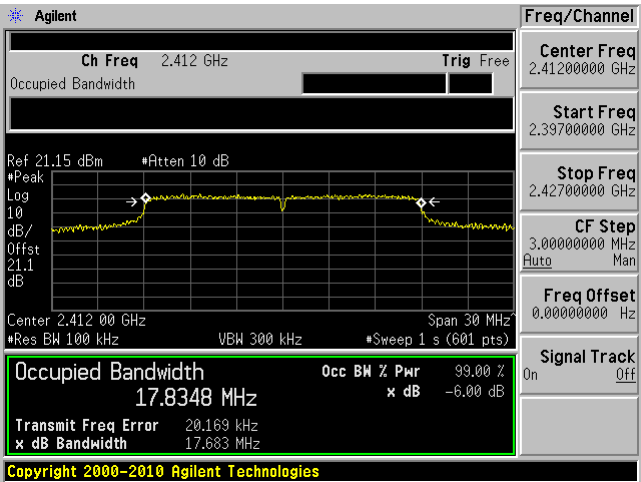


Low Channel 99% OBW Antenna A

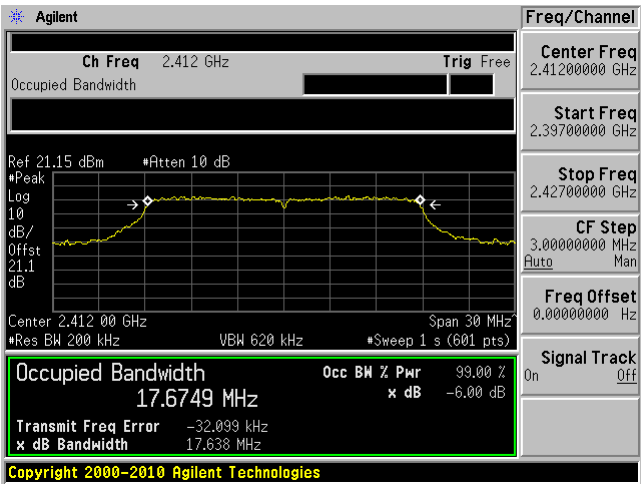


Low Channel 99% OBW Antenna B

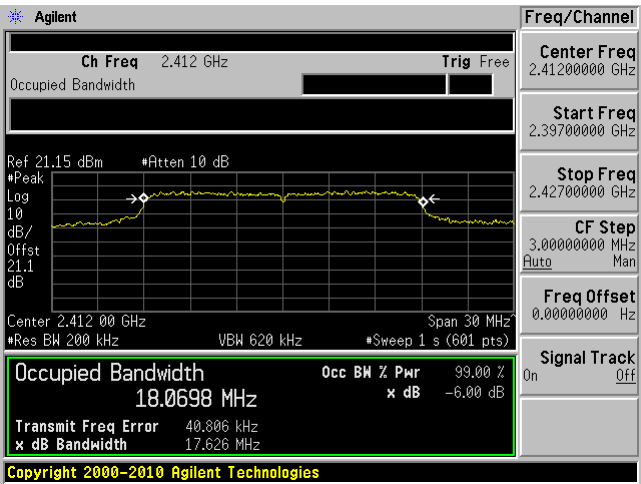


Mid Channel 6 dB OBW Antenna A

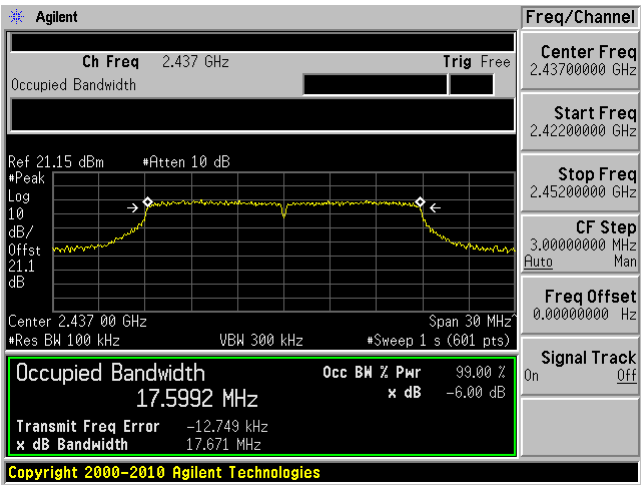


Mid Channel 6 dB OBW Antenna B

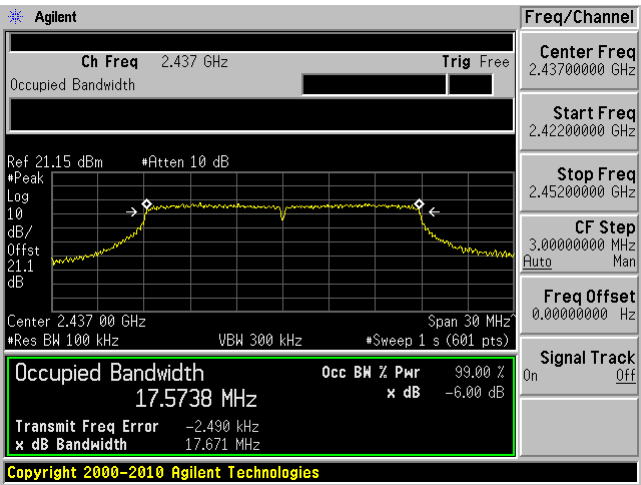


Mid Channel 99% OBW Antenna A

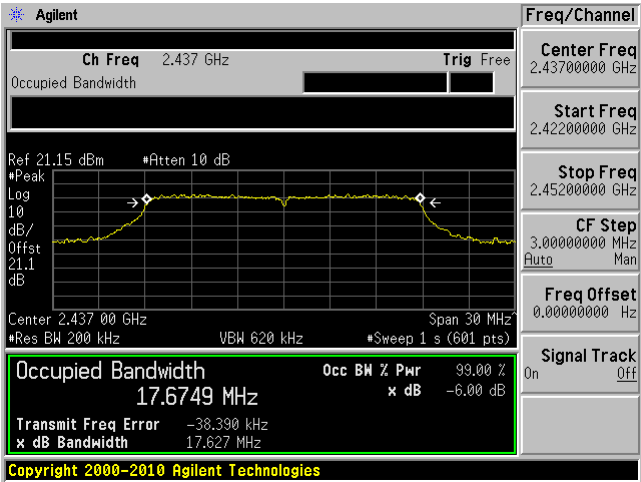


Mid Channel 99% OBW Antenna B

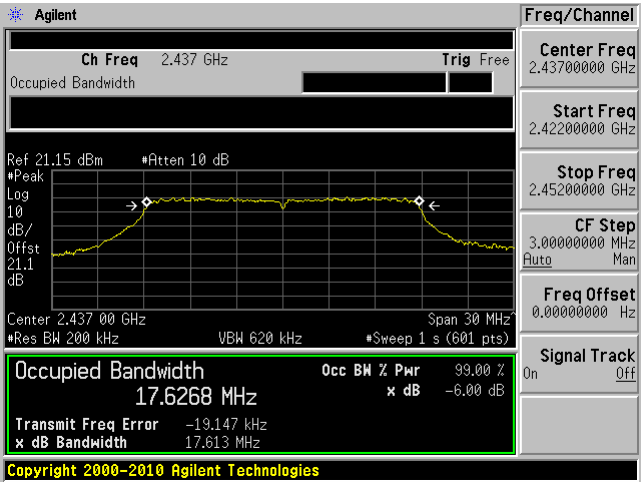


High Channel 6 dB OBW Antenna A

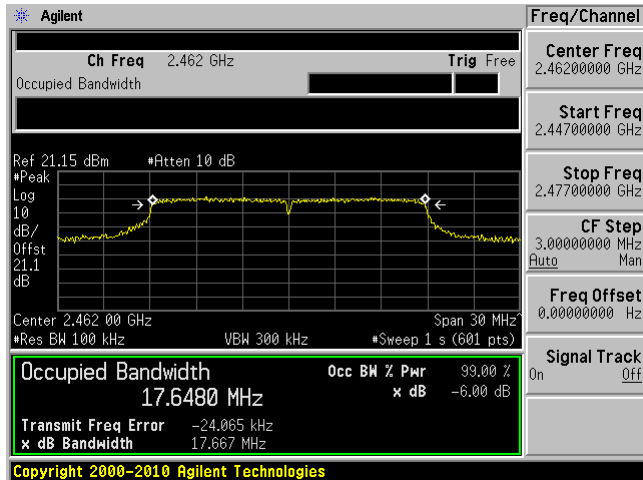


High Channel 6 dB OBW Antenna B

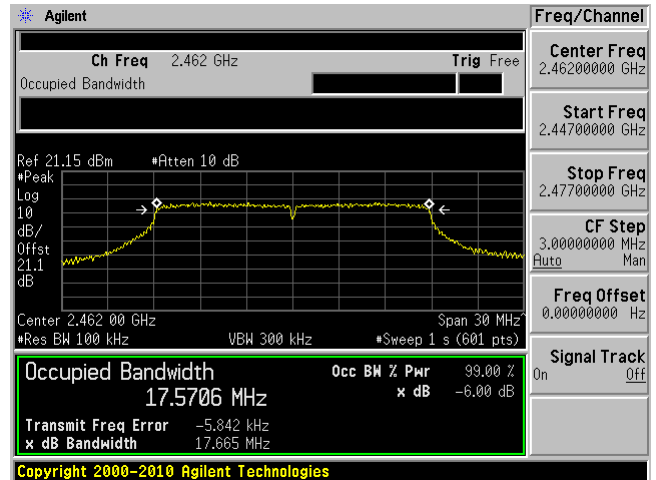

High Channel 99% OBW Antenna A

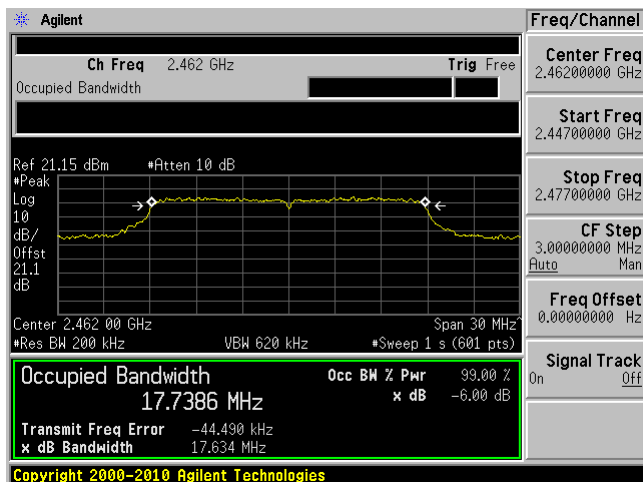


High Channel 99% OBW Antenna B

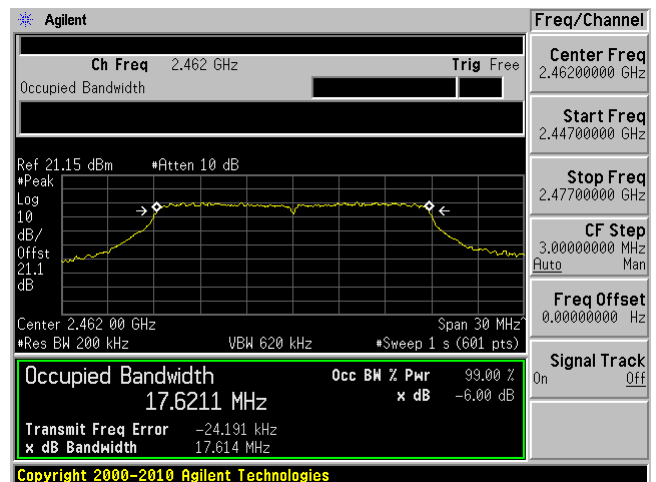


RADIO 2 BLE


Low Channel 6 dB OBW

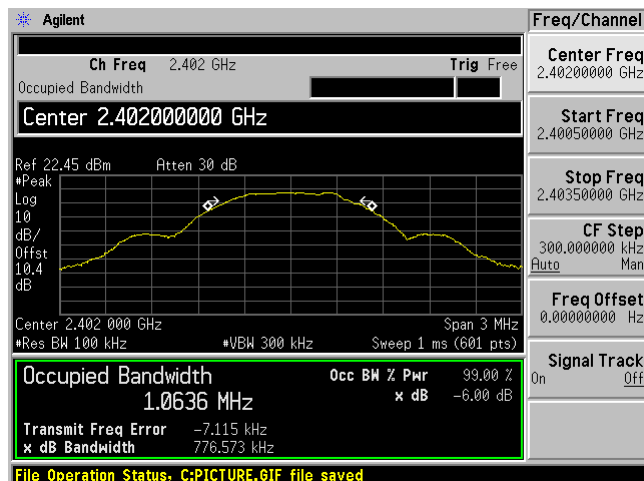


Low Channel 99% OBW

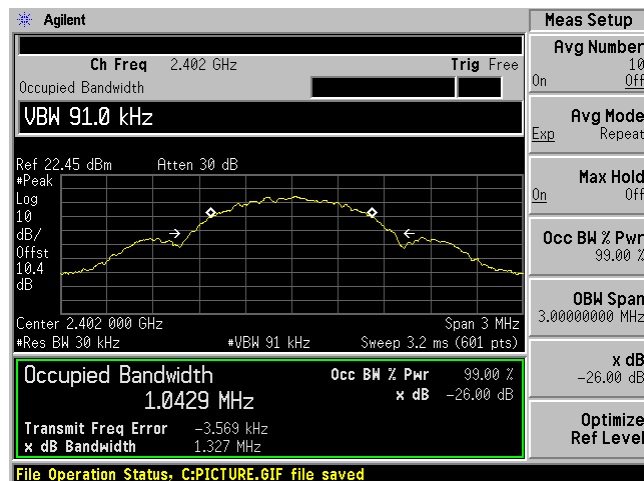


Mid Channel 6 dB OBW

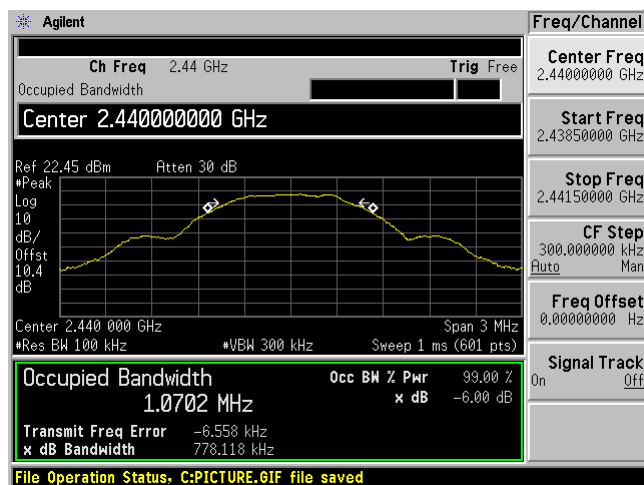


Mid Channel 99% OBW

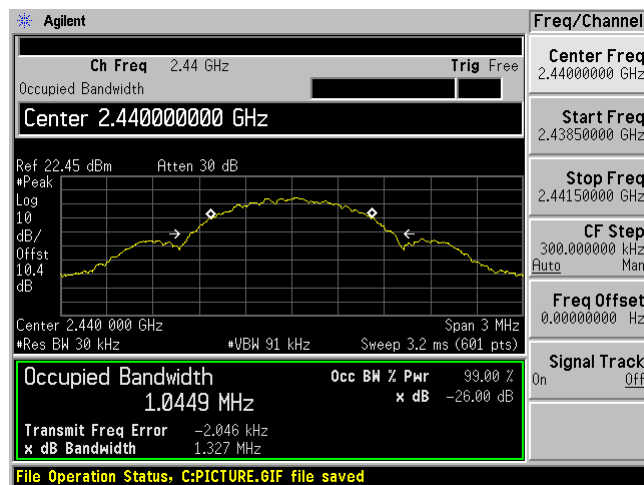

High Channel 6 dB OBW

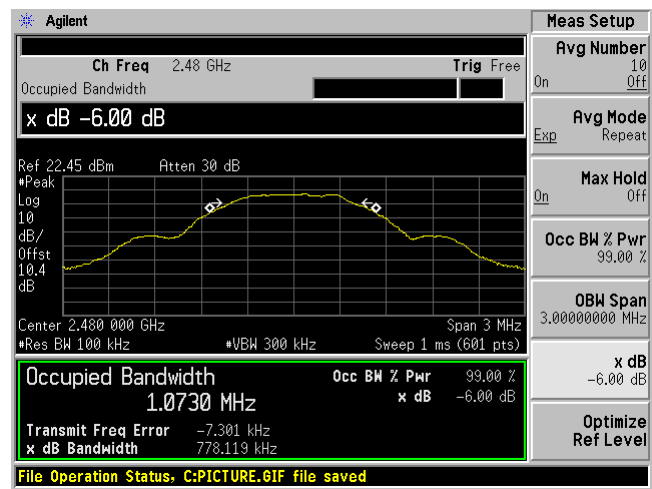


High Channel 99% OBW

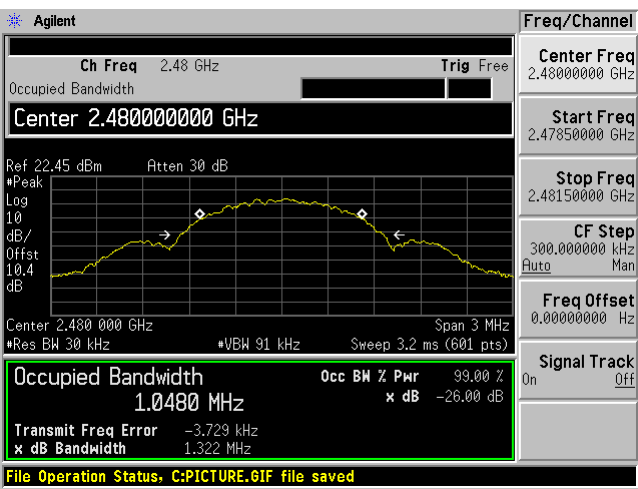


RADIO 1 802.11b mode


Low Channel 6 dB OBW

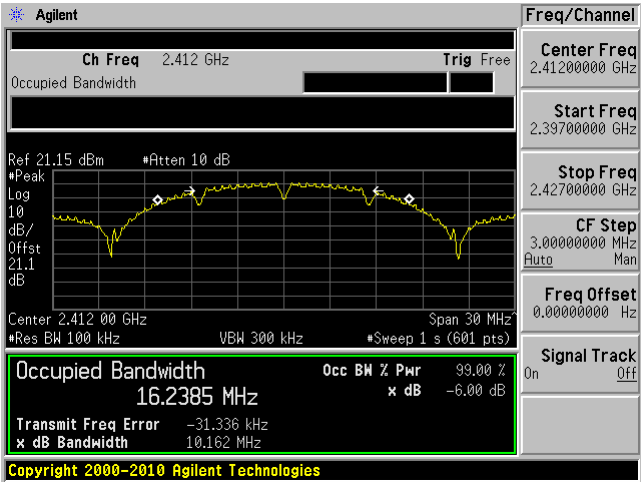


Low Channel 99% OBW

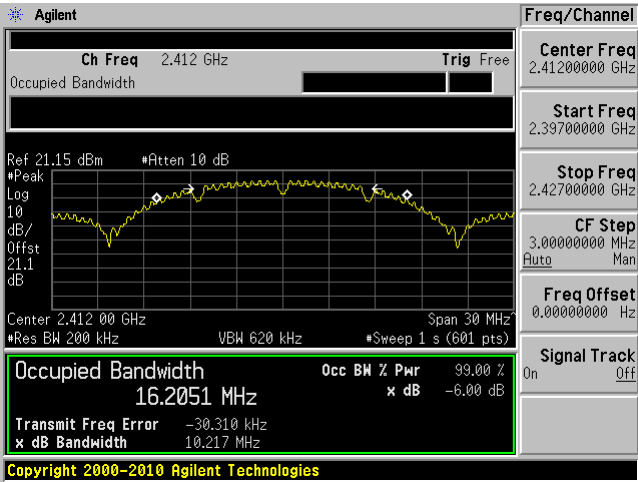


Mid Channel 6 dB OBW

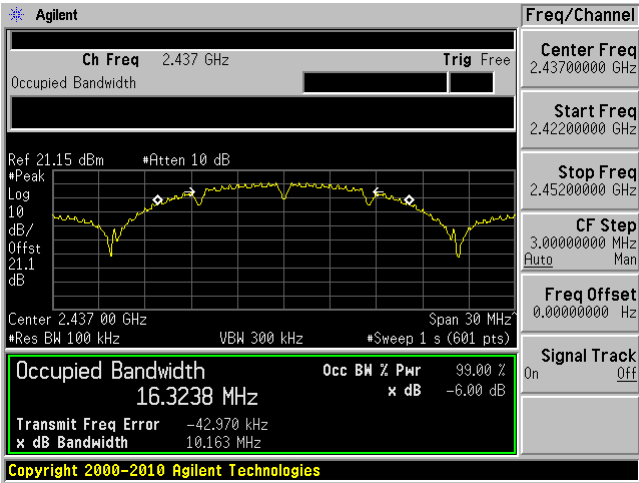


Mid Channel 99% OBW

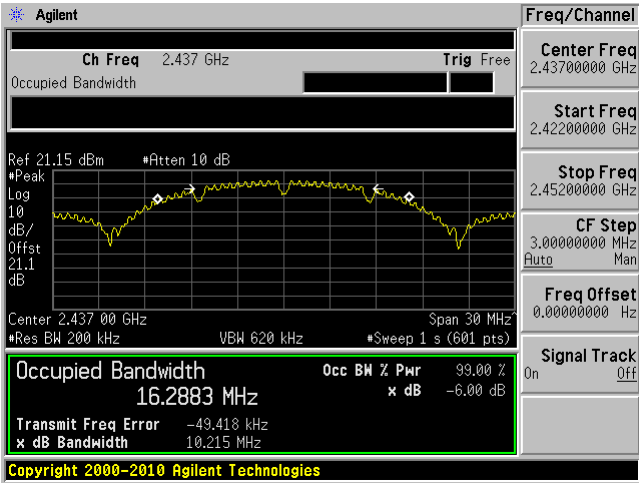

High Channel 6 dB OBW

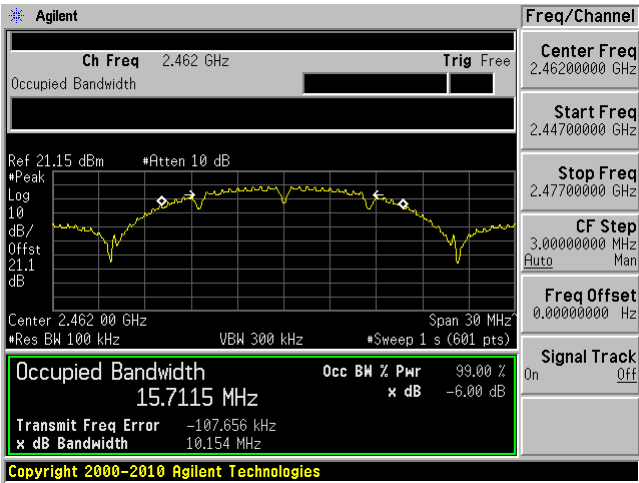


High Channel 99% OBW

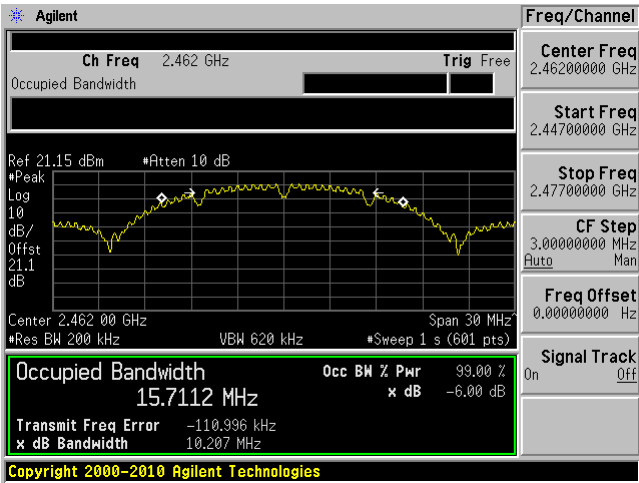


RADIO 1 802.11g mode


Low Channel 6 dB OBW

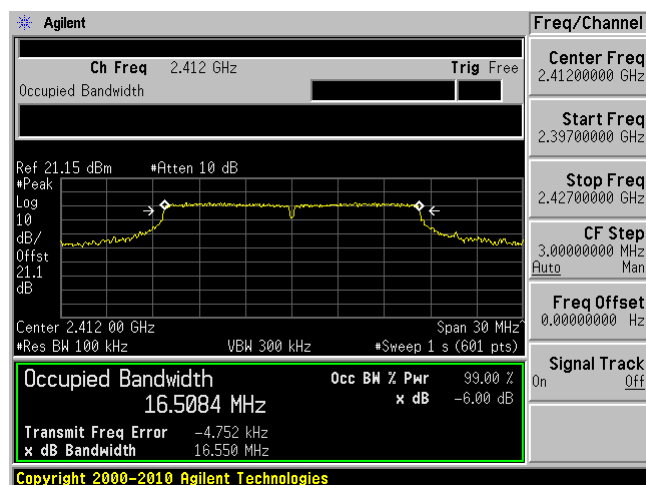


Low Channel 99% OBW

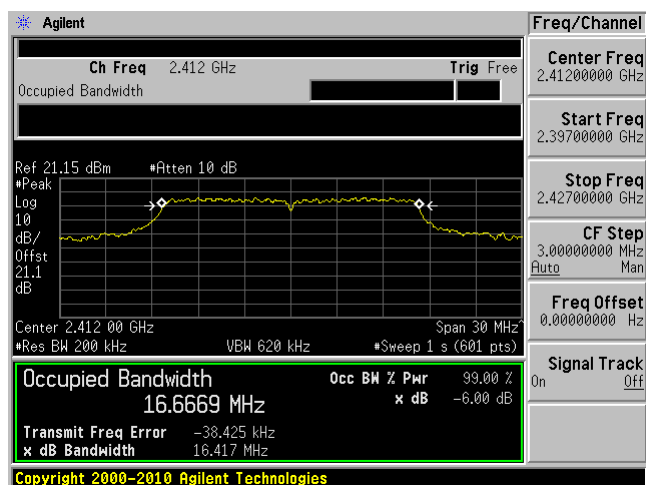


Mid Channel 6 dB OBW

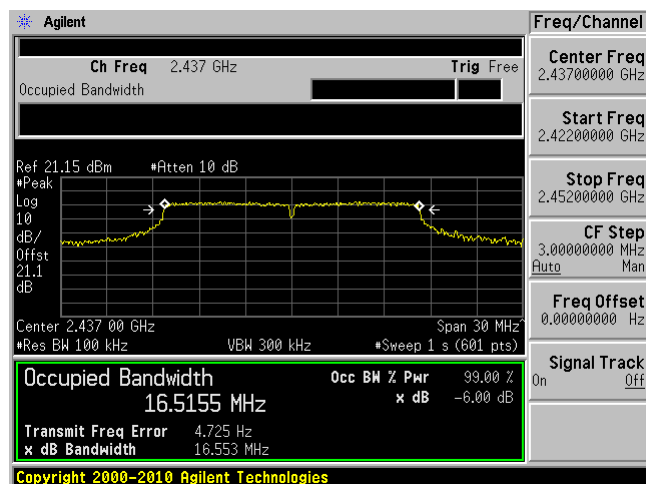


Mid Channel 99% OBW

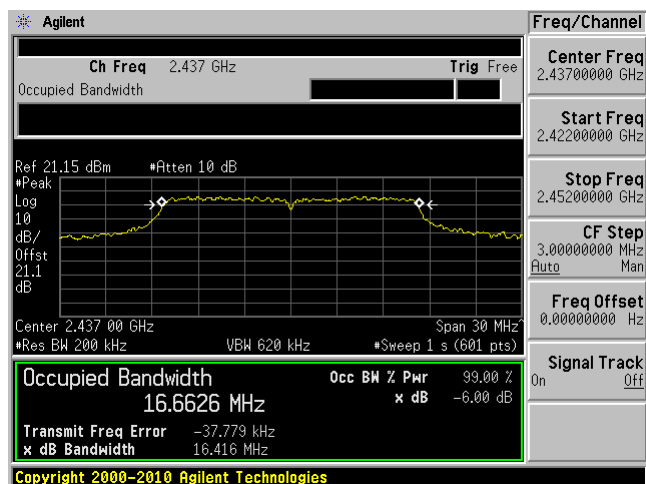

High Channel 6 dB OBW

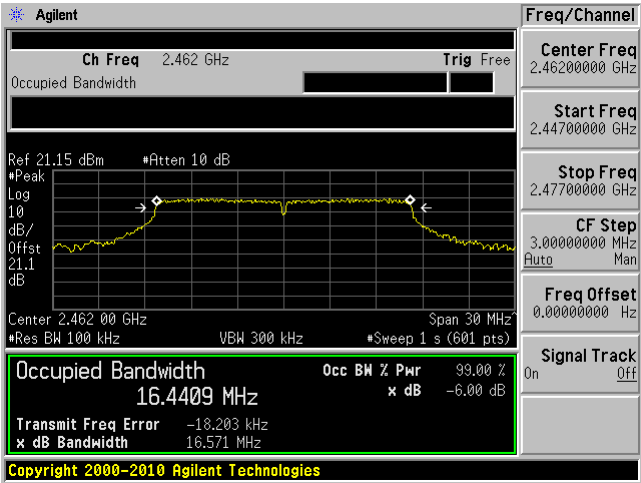


High Channel 99% OBW

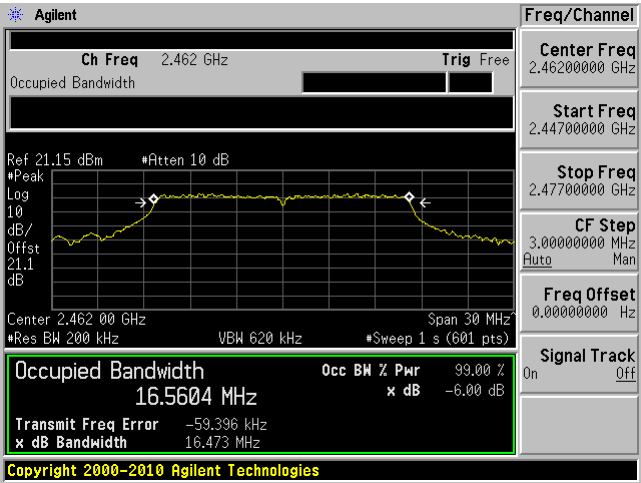


RADIO 1 802.11 n20 mode


Low Channel 6 dB OBW

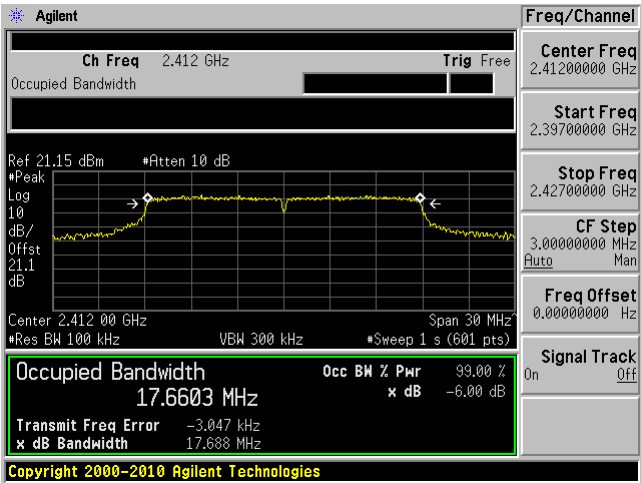


Low Channel 99% OBW

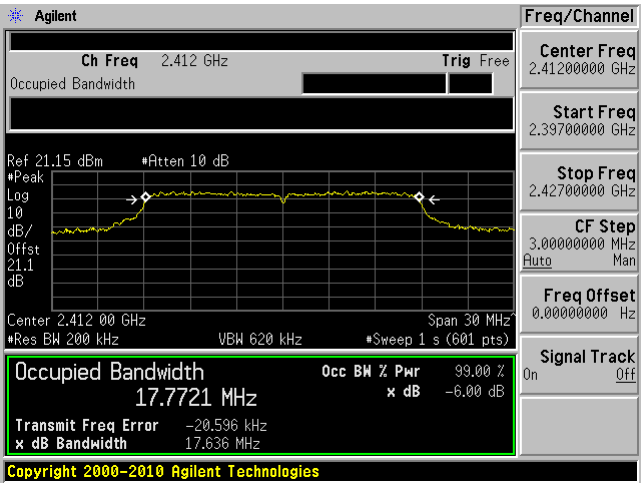


Mid Channel 6 dB OBW

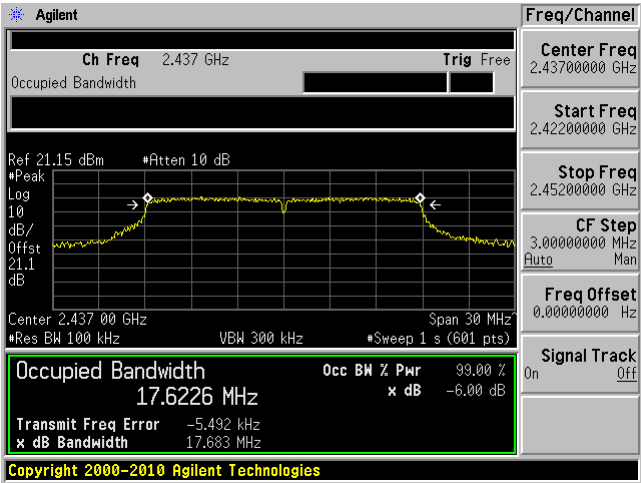


Mid Channel 99% OBW

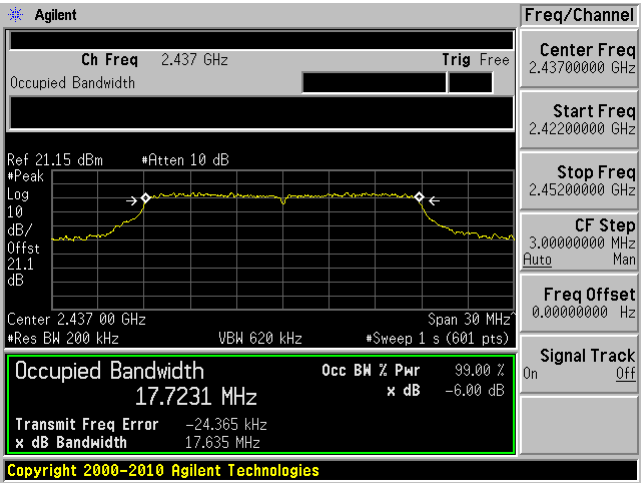

High Channel 6 dB OBW

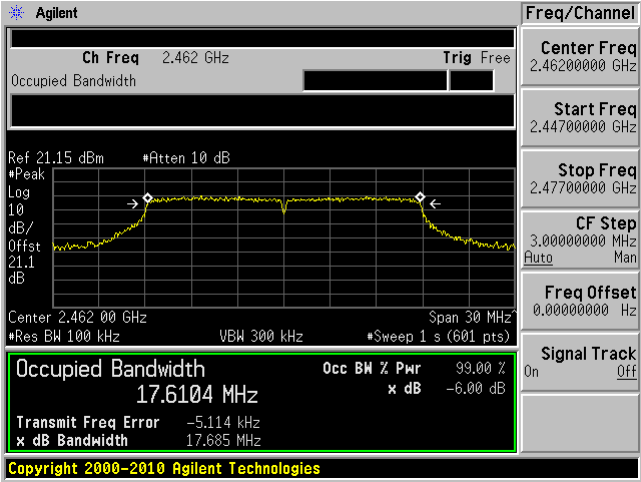

High Channel 99% OBW

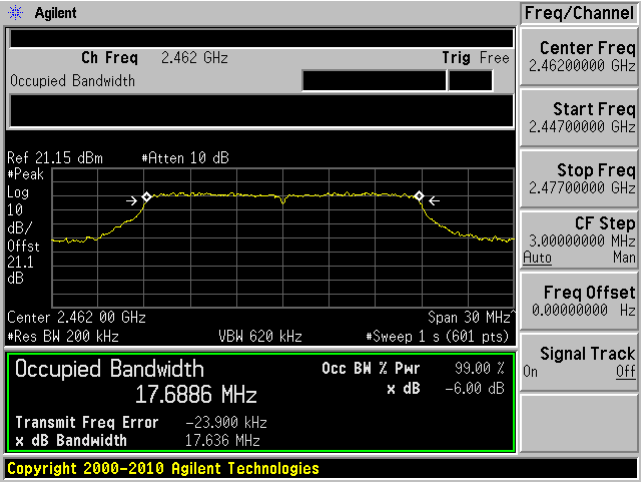

10 FCC §15.247(b)(3) - Output Power Measurement

10.1 Applicable Standards

According to ECFR §15.247(b)(3) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

10.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 9: Fundamental emission output power

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
ETS- Lingerin	Power Sensor	7002-006	160097	2018-12-31	2 years
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-06	1 year
-	RF Cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

10.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Zhao Zhao and Christian McCaig on 2019-07-09 and 2019-07-24 in RF site.

10.5 Test Results

RADIO 2 Average Output Power

Channel	Frequency (MHz)	Conducted Output Power (dBm)			Output Power Limit (dBm)	Result
		Antenna A	Antenna B	Total		
802.11b						
Low	2412	17.63	20.06	22.02	30	Pass
Middle	2437	17.26	19.94	21.81	30	Pass
High	2462	16.83	19.88	21.63	30	Pass
802.11g						
Low	2412	14.01	16.43	18.40	30	Pass
Middle	2437	13.27	16.85	18.43	30	Pass
High	2462	12.6	16.14	17.73	30	Pass
802.11 n20						
Low	2422	12.98	15.57	17.48	30	Pass
Middle	2437	14.95	17.71	19.56	30	Pass
High	2462	13.84	15.91	18.01	30	Pass

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Output Power Limit (dBm)	Result
BLE				
Low	2402	11.84	30	Pass
Middle	2440	11.83	30	Pass
High	2480	11.24	30	Pass

RADIO 1 Average Output Power

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Output Power Limit (dBm)	Result
802.11b				
Low	2412	20.28	30	Pass
Middle	2437	22.47	30	Pass
High	2462	20.67	30	Pass
802.11g				
Low	2412	15.54	30	Pass
Middle	2437	17.68	30	Pass
High	2462	15.03	30	Pass
802.11n20				
Low	2412	15.92	30	Pass
Middle	2437	15.97	30	Pass
High	2462	14.97	30	Pass

Note: the directional gain is less than 6dBi, thus no reduction to the limit.

11 FCC §15.247(d) - 100 kHz Bandwidth of Band Edges

11.1 Applicable Standards

According to ECFR §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

11.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 13: Band-edge measurements

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-06	1 year
-	RF Cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

11.4 Test Environmental Conditions


Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Zhao Zhao and Christian McCaig on 2019-07-03, 2019-07-05 and 2019-07-24 in RF site.


11.5 Test Results

Radio 2
802.11 b mode


Low Channel Antenna A

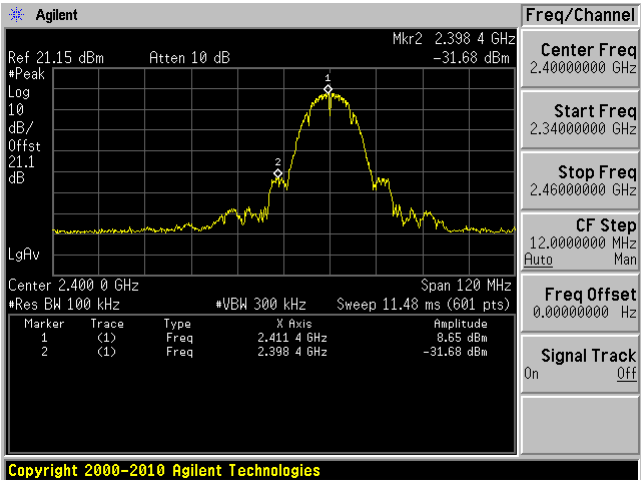


Low Channel Antenna B

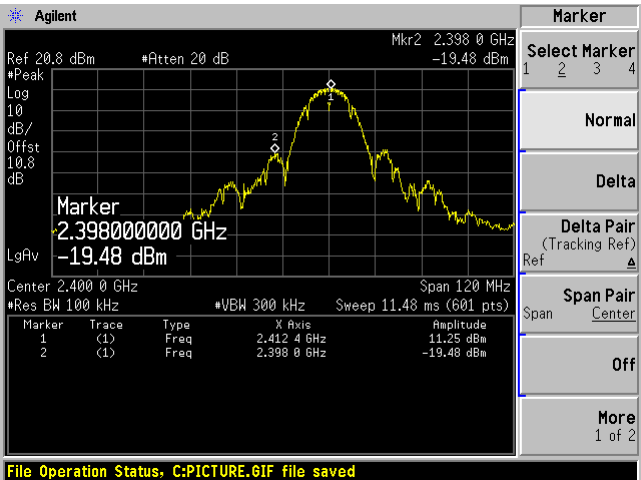

High Channel Antenna A

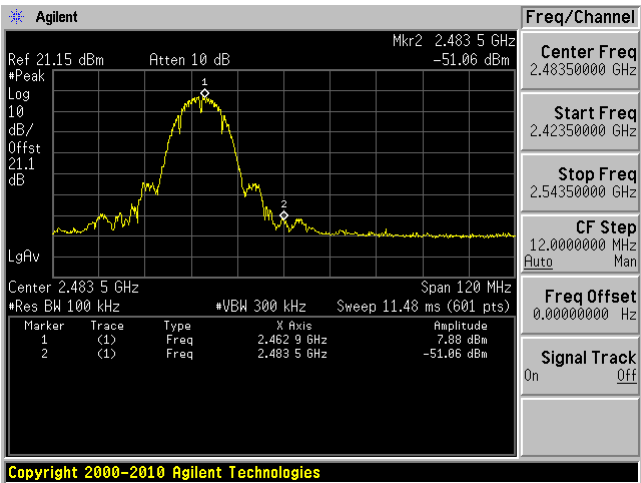


High Channel Antenna B

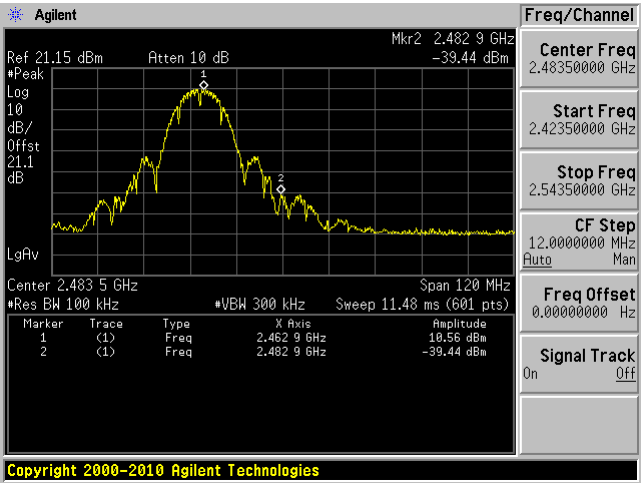


802.11 g mode


Low Channel Antenna A

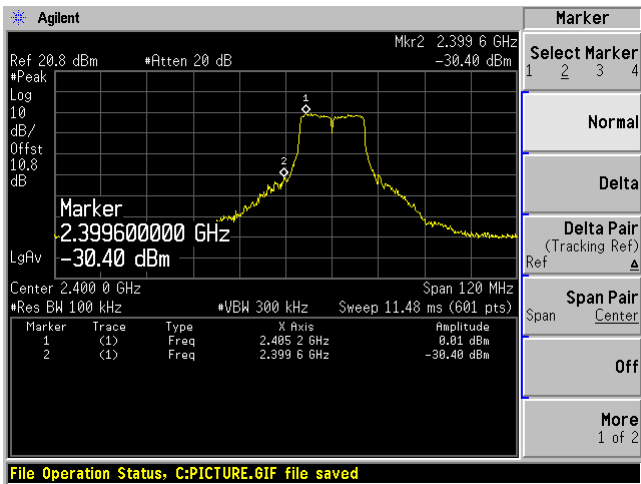


Low Channel Antenna B

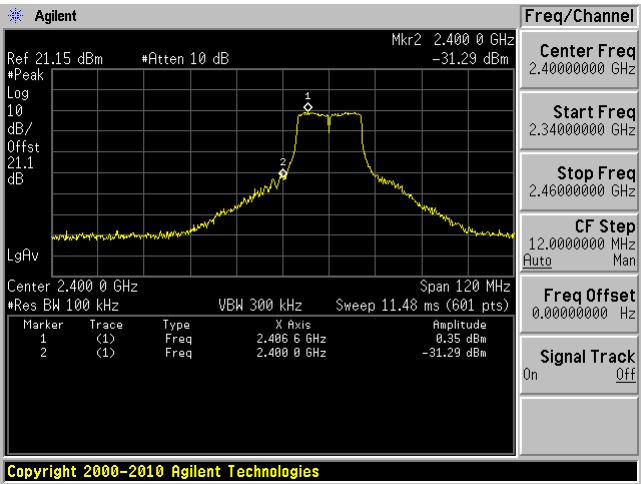

High Channel Antenna A

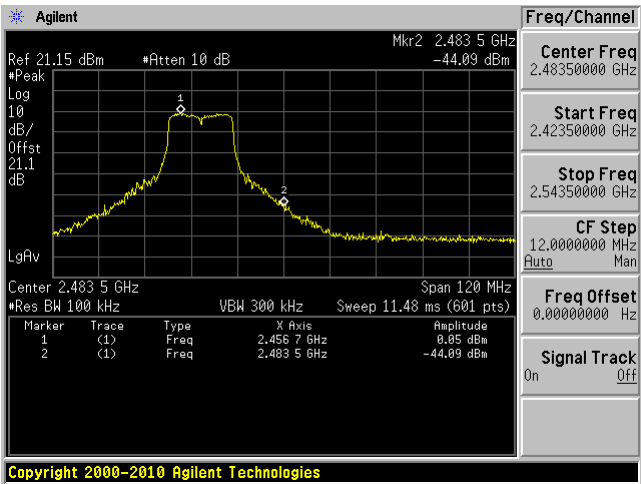


High Channel Antenna B

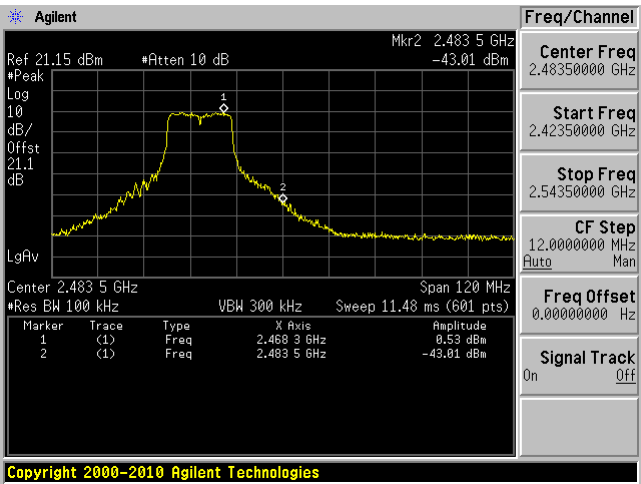


802.11 n20 mode


Low Channel Antenna A

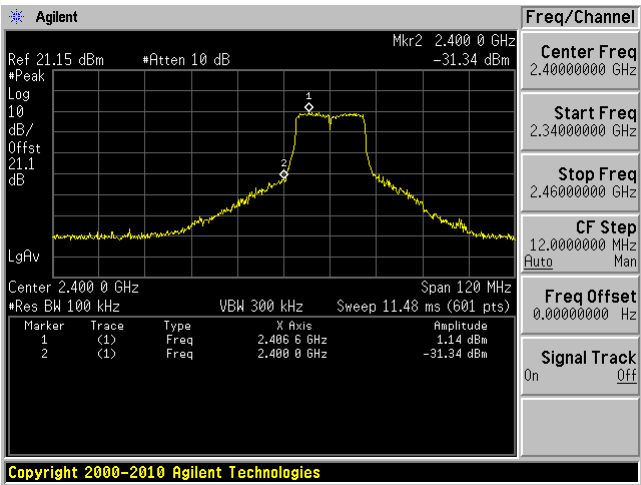


Low Channel Antenna B

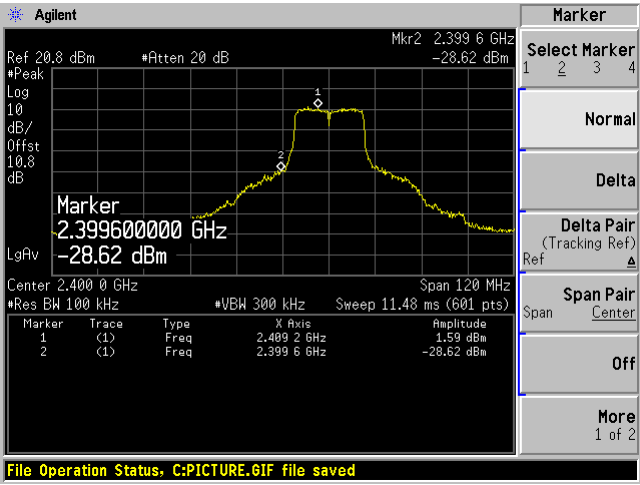

High Channel Antenna A

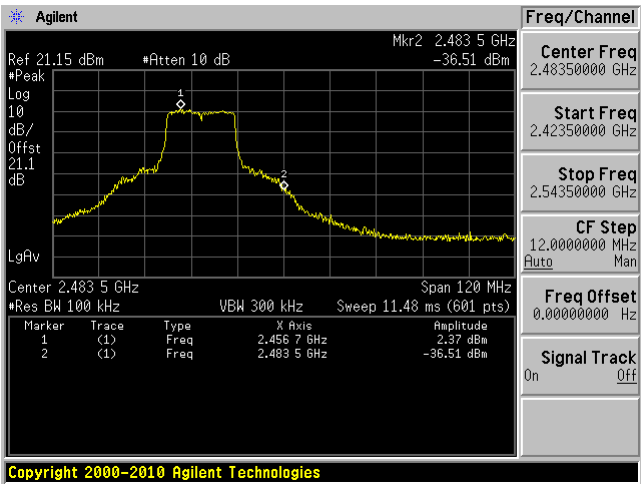


High Channel Antenna B

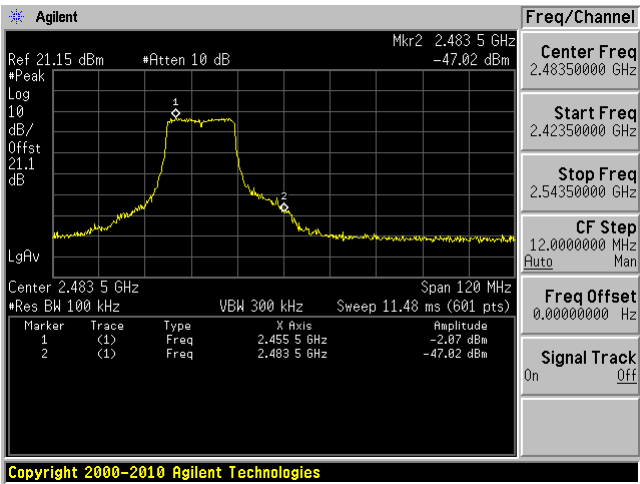


BLE mode

Low Channel

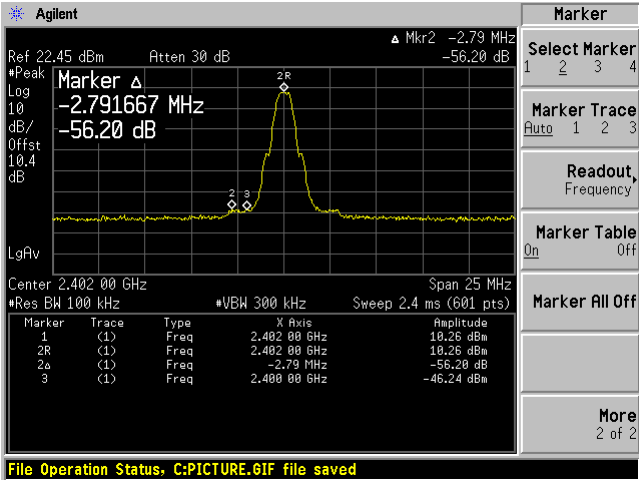


High Channel

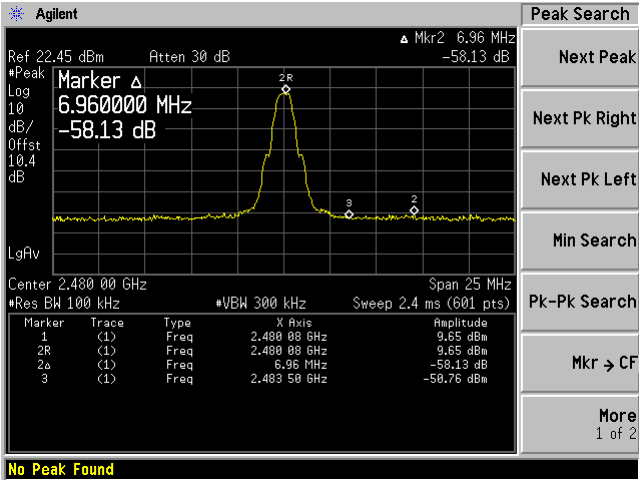


Radio 1
802.11 b mode

Low Channel

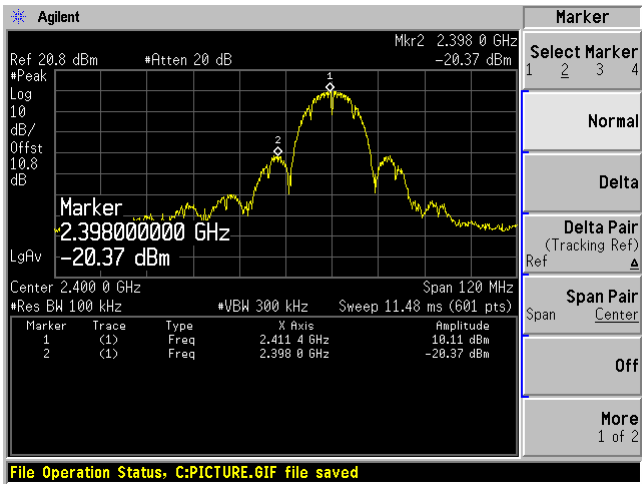


High Channel

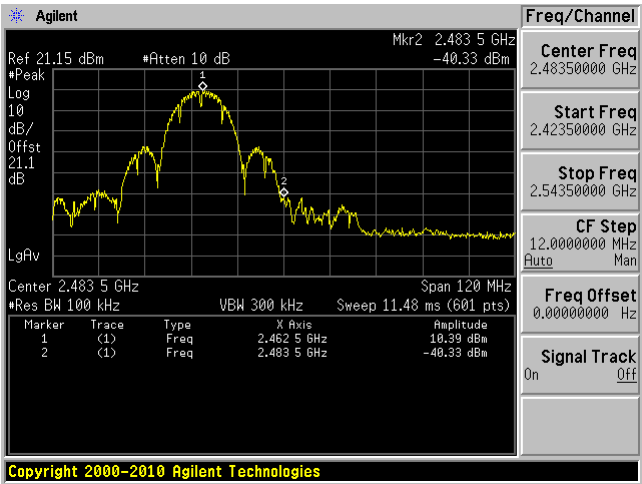


802.11 g mode

Low Channel

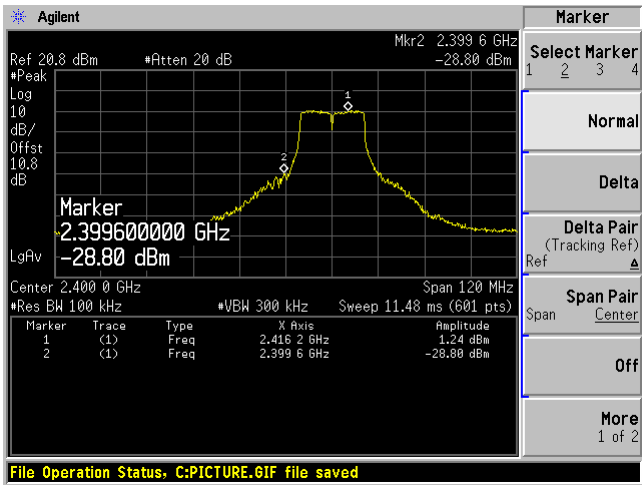


High Channel

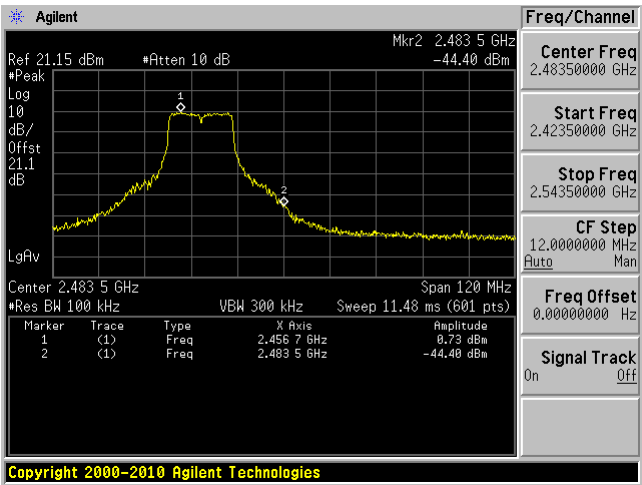


802.11 n20 mode

Low Channel

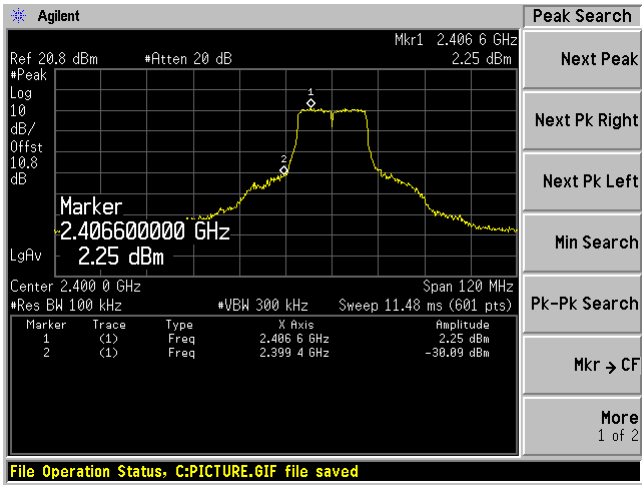

High Channel

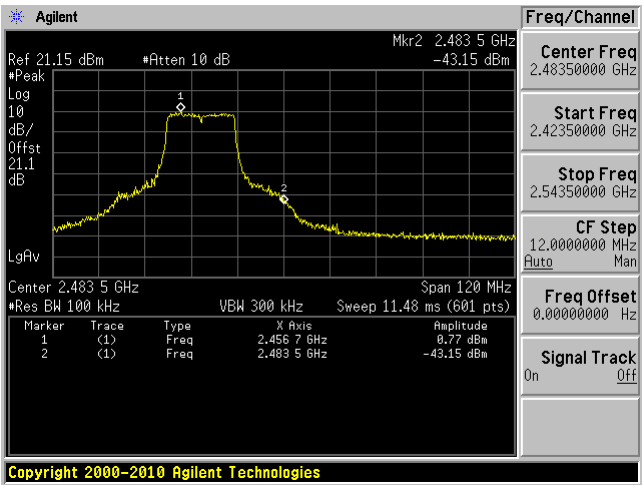

12 FCC §15.247(e) - Power Spectral Density

12.1 Applicable Standards

According to ECFR §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10: Maximum power spectral density level in the fundamental emission.

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-06	1 year
-	RF Cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

12.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Zhao Zhao and Christian McCaig on 2019-07-05 and 2019-07-24 in RF site.

12.5 Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)
		Antenna A	Antenna B	Total	
802.11b					
Low	2412	-11.16	-8.40	-6.55	8
Middle	2437	-15.61	-16.04	-12.81	8
High	2462	-16.11	-15.63	-12.85	8
802.11g					
Low	2412	-13.50	-11.13	-9.14	8
Middle	2437	-14.00	-13.34	-10.65	8
High	2462	-14.23	-13.63	-10.91	8
802.11n20					
Low	2412	-14.04	-11.59	-9.63	8
Middle	2437	-13.27	-13.49	-10.37	8
High	2462	-12.06	-16.00	-10.59	8


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
BLE				
Low	2402	-4.89	8	Pass
Middle	2440	-4.55	8	Pass
High	2480	-4.74	8	Pass

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b				
Low	2412	-9.59	8	Pass
Middle	2437	-7.91	8	Pass
High	2462	-9.46	8	Pass
802.11g				
Low	2412	-13.12	8	Pass
Middle	2437	-10.85	8	Pass
High	2462	-13.41	8	Pass
802.11n20				
Low	2412	-11.41	8	Pass
Middle	2437	-12.53	8	Pass
High	2462	-12.50	8	Pass


Note: the directional gain is less than 6dBi, thus no reduction to the limit.
Please refer to the following plots for detailed test results

RADIO 2 802.11b mode


Low Channel Antenna A

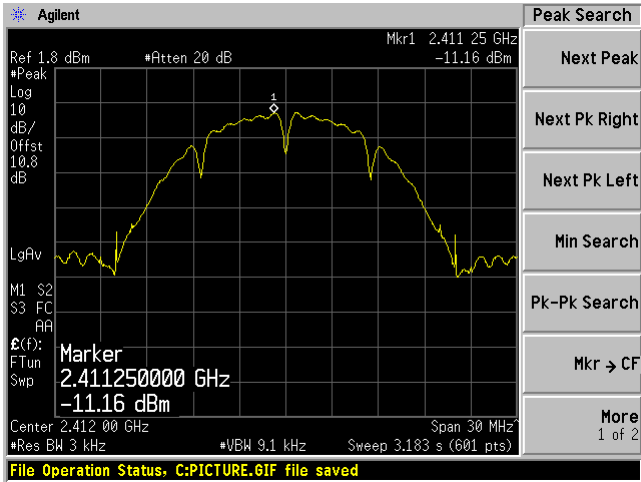


Low Channel Antenna B

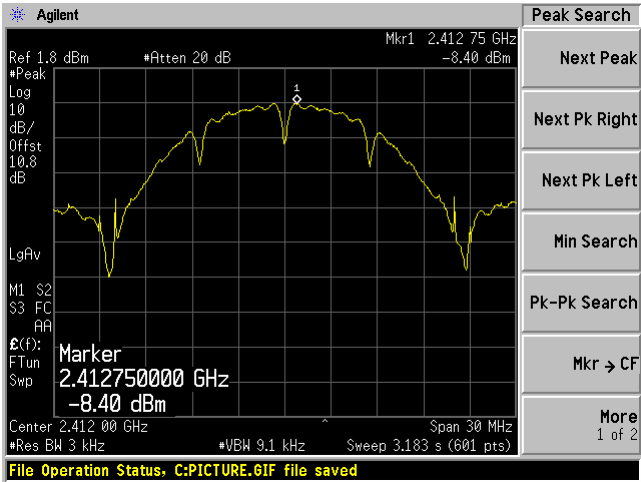


Mid Channel Antenna A

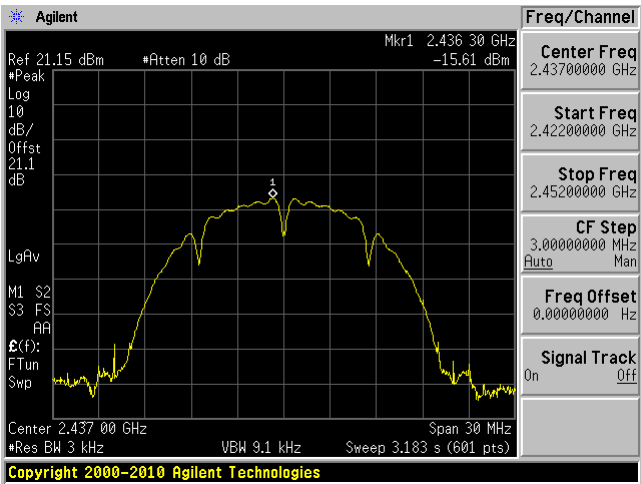


Mid Channel Antenna B

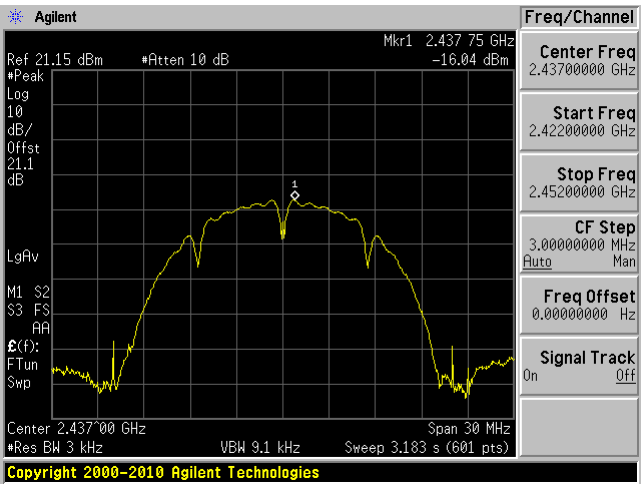

High Channel Antenna A

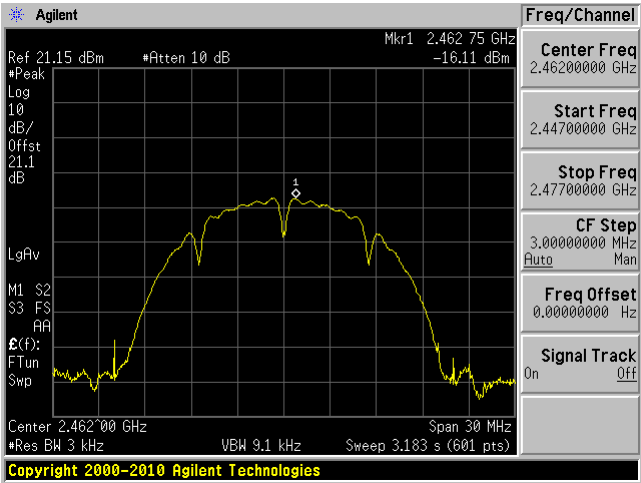


High Channel Antenna B

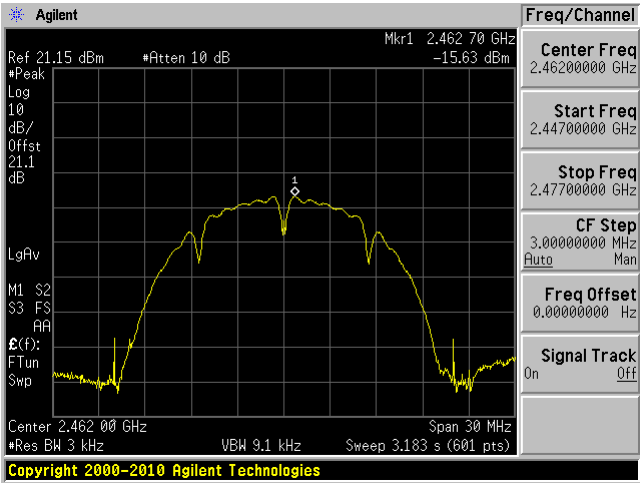


RADIO 2 802.11g mode


Low Channel Antenna A

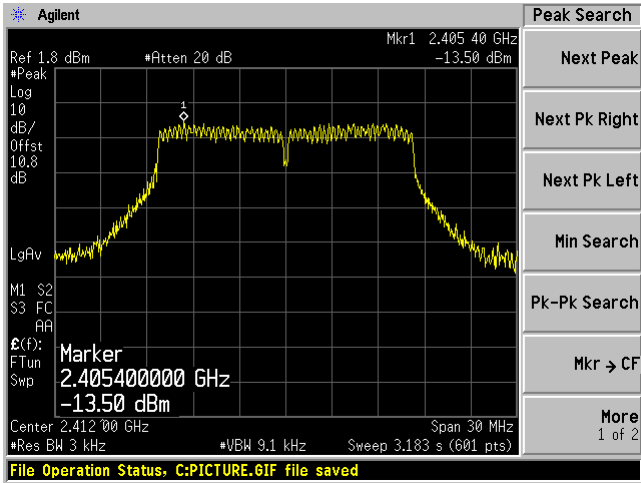


Low Channel Antenna B

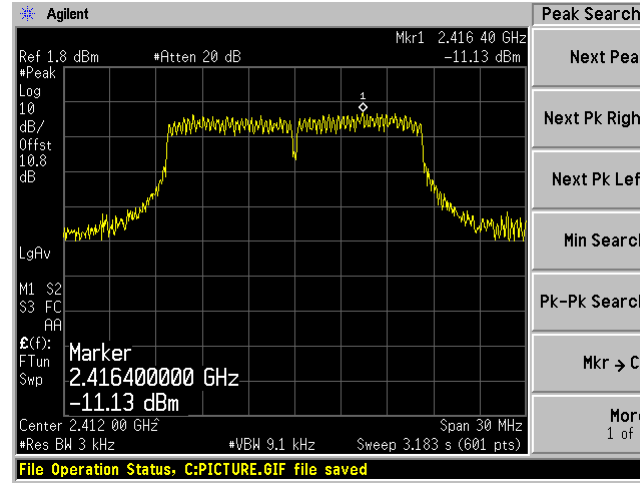


Mid Channel Antenna A

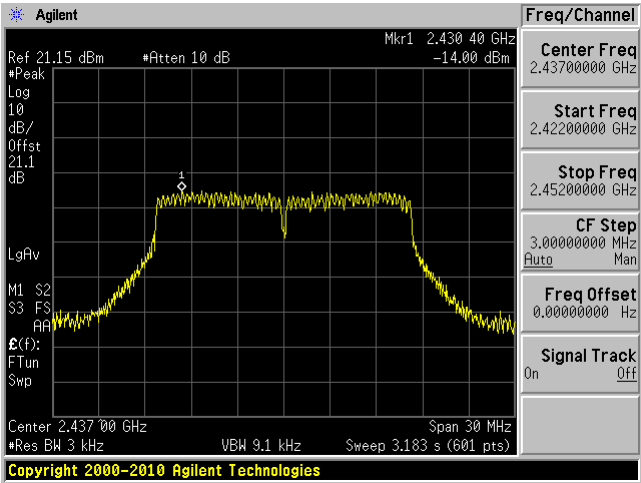


Mid Channel Antenna B

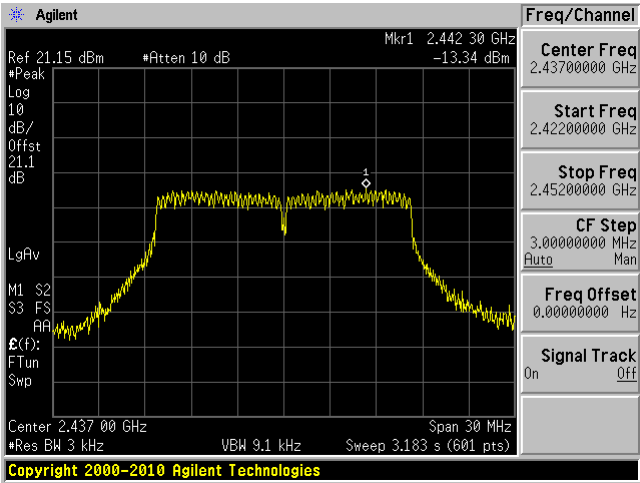

High Channel Antenna A

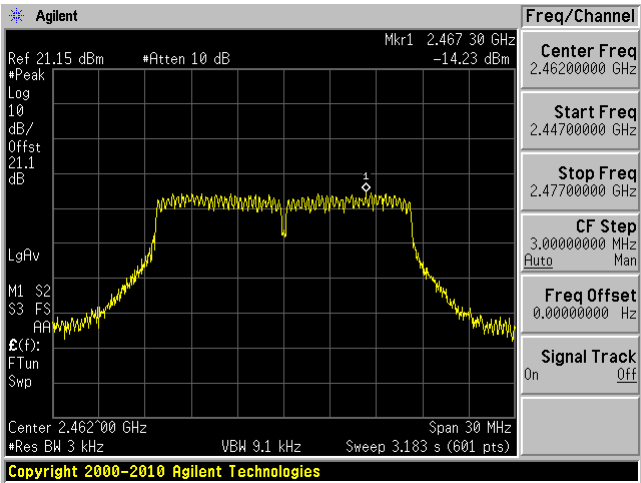


High Channel Antenna B

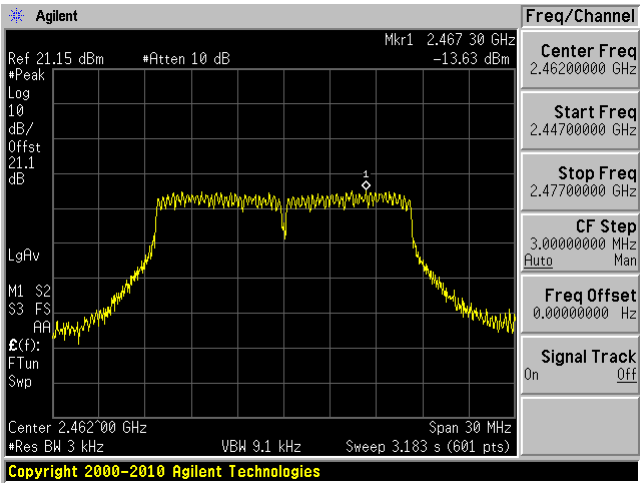


RADIO 2 802.11 n20 mode


Low Channel Antenna A

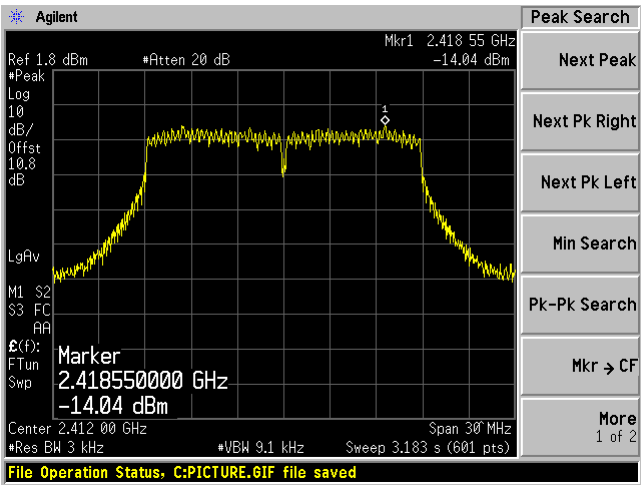


Low Channel Antenna B

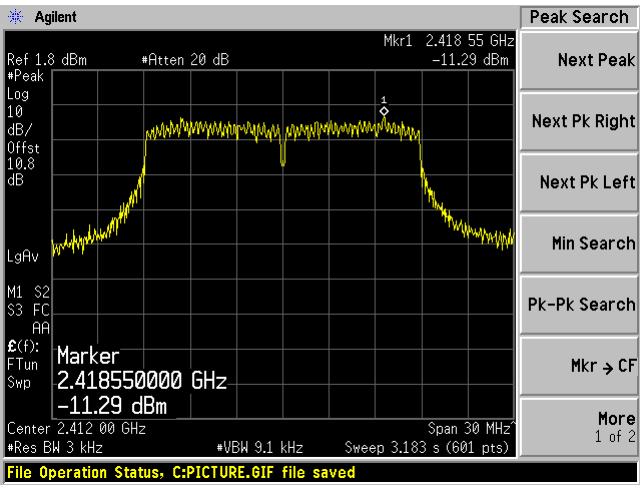


Mid Channel Antenna A

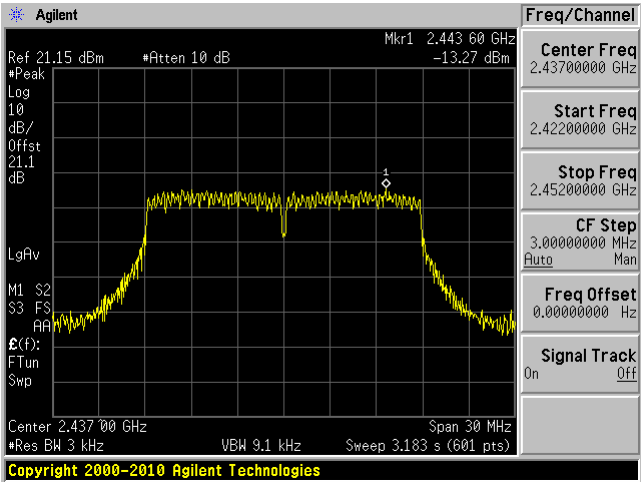


Mid Channel Antenna B

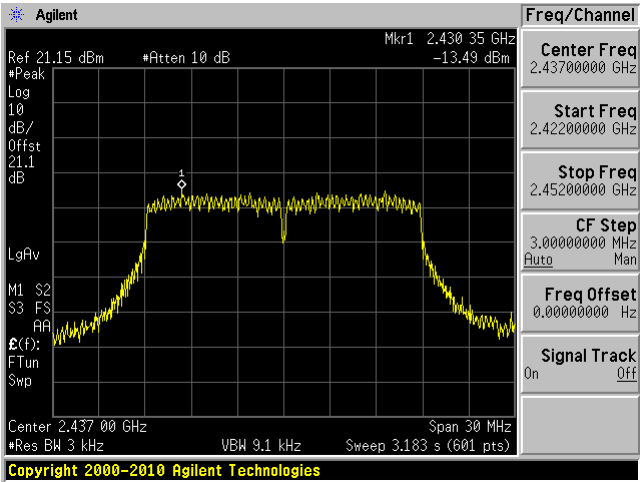

High Channel Antenna A

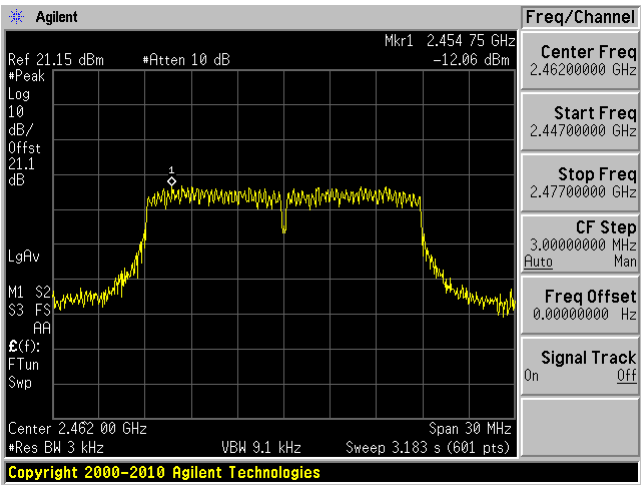


High Channel Antenna B

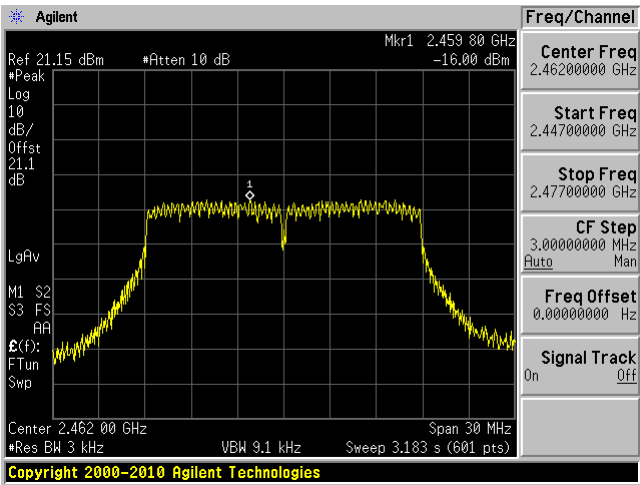


RADIO 2 BLE mode


Low Channel

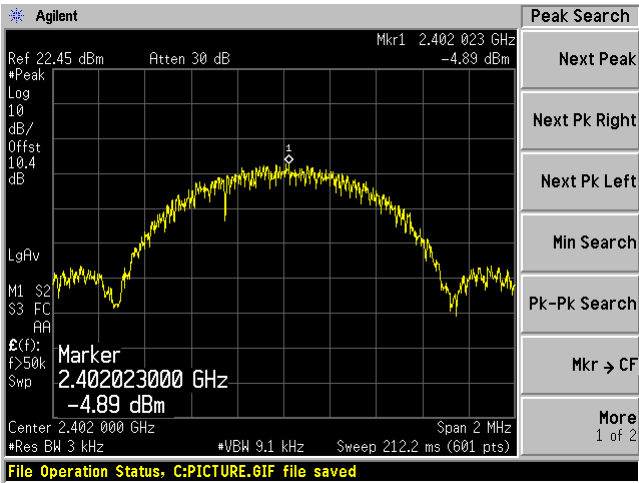

Mid Channel

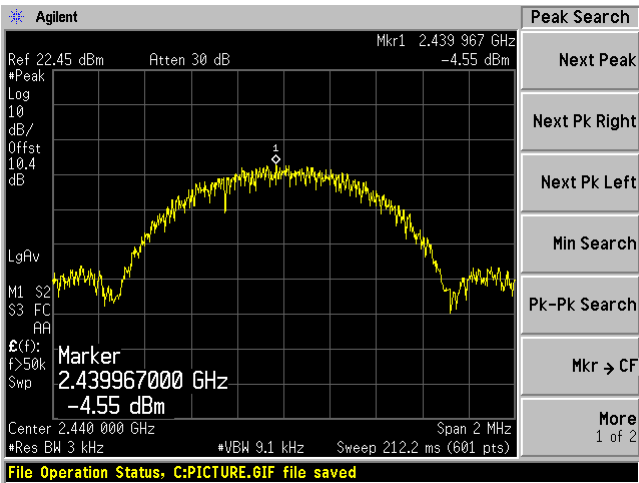


High Channel

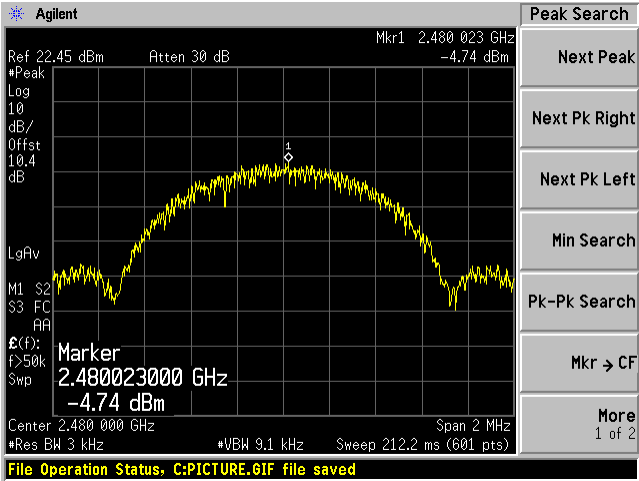


RADIO 1 802.11b mode


Low Channel

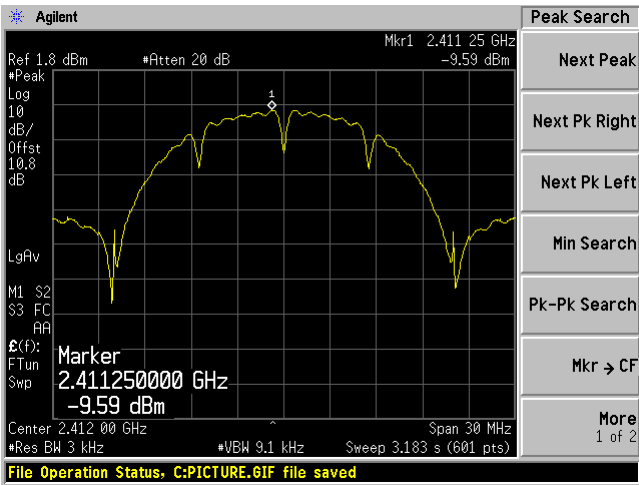

Mid Channel

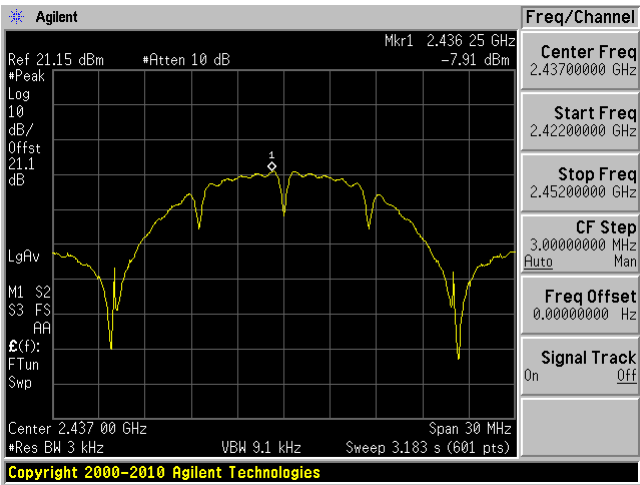


High Channel

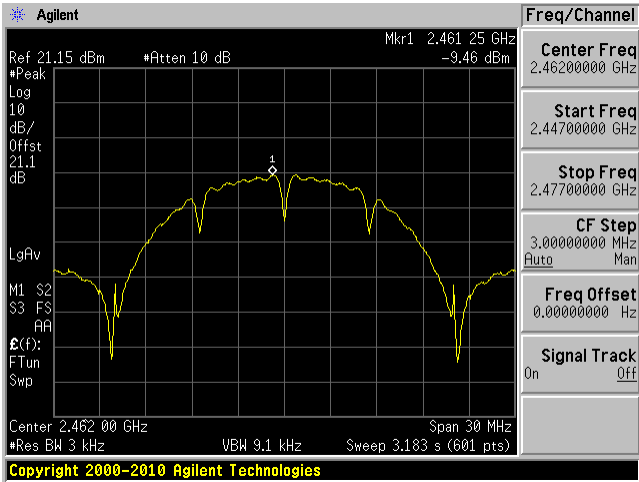


RADIO 1 802.11g mode


Low Channel

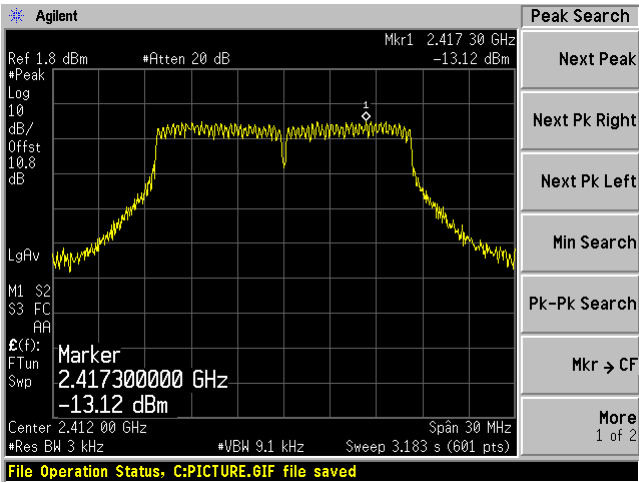

Mid Channel

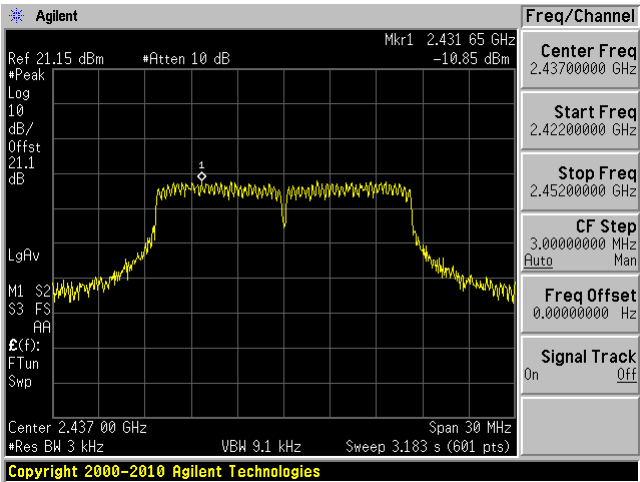


High Channel

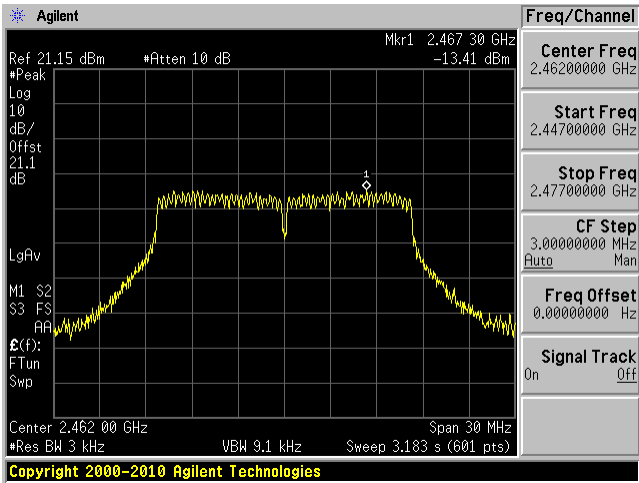


RADIO 1 802.11 n20 mode


Low Channel

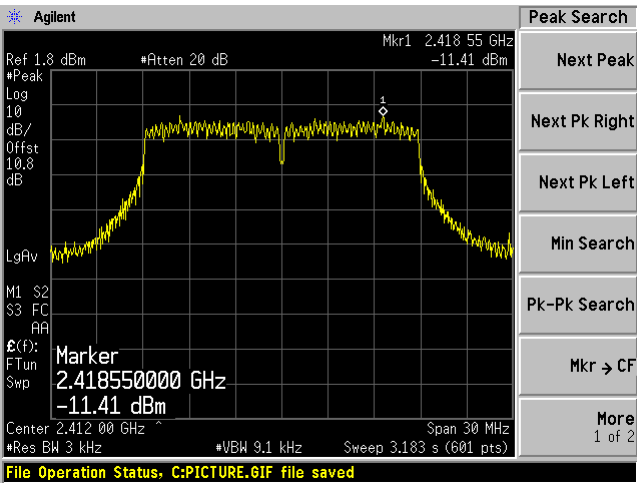

Mid Channel

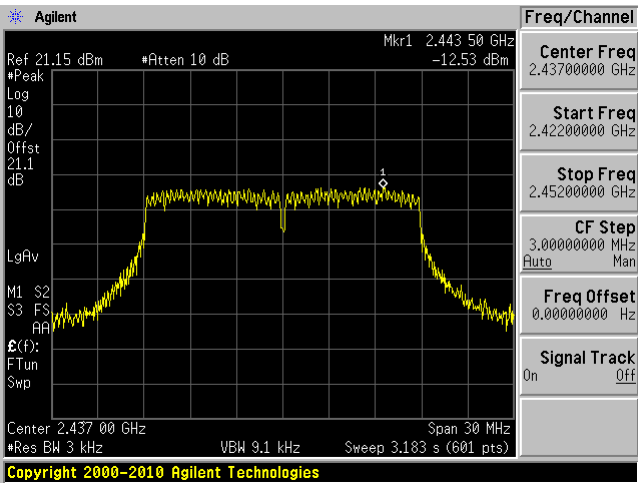

High Channel

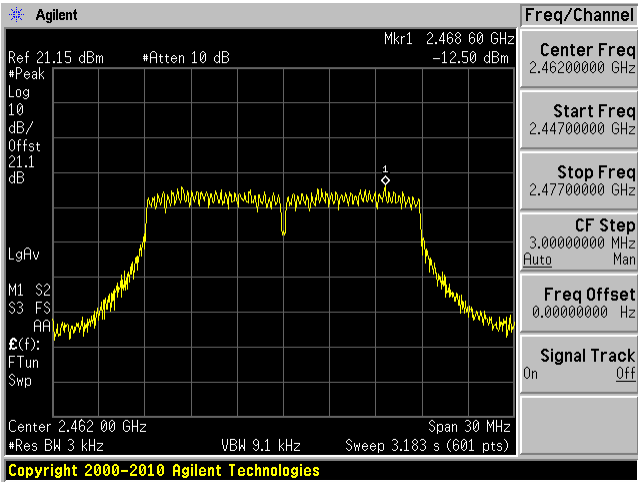

13 FCC §15.247(d) - Spurious Emissions at Antenna Terminals

13.1 Applicable Standards

For FCC §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

13.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

13.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2019-03-06	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A
	10dB attenuator			Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) “A2LA Policy on Metrological Traceability”.

13.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Zhao Zhao and Christian McCaig on 2019-07-09 and 2019-07-24 in RF site.

13.5 Test Results



Please refer to following plots.

RADIO 2 802.11b mode

Antenna A Low Channel 2412MHz

30MHz – 3GHz



3GHz – 26GHz

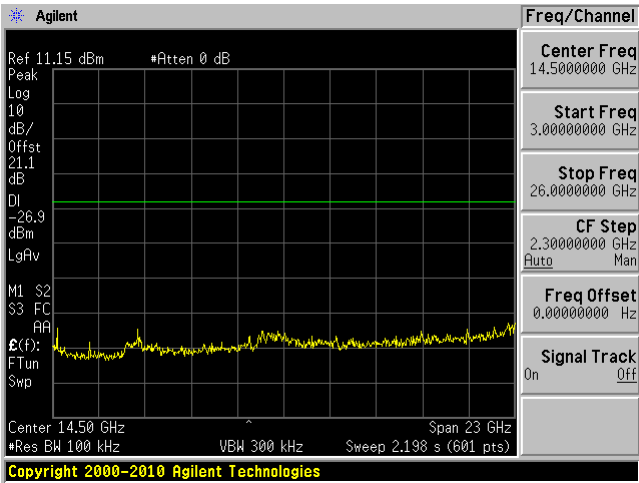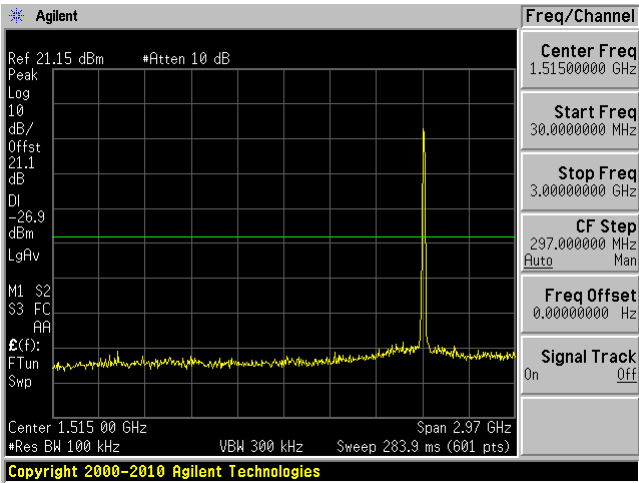

Antenna A Mid Channel 2437MHz


30MHz – 3GHz

3GHz – 26GHz

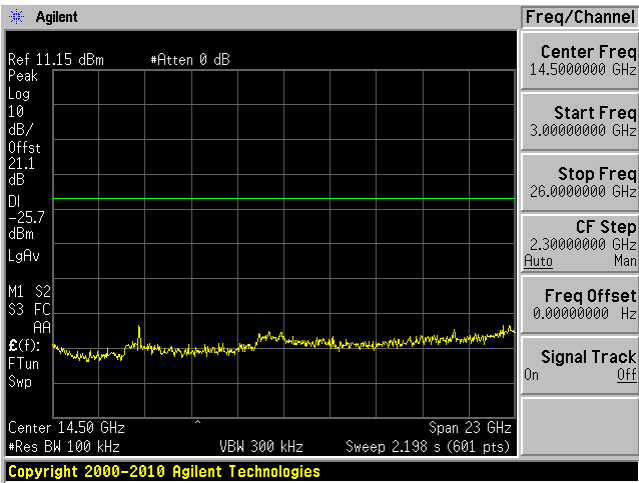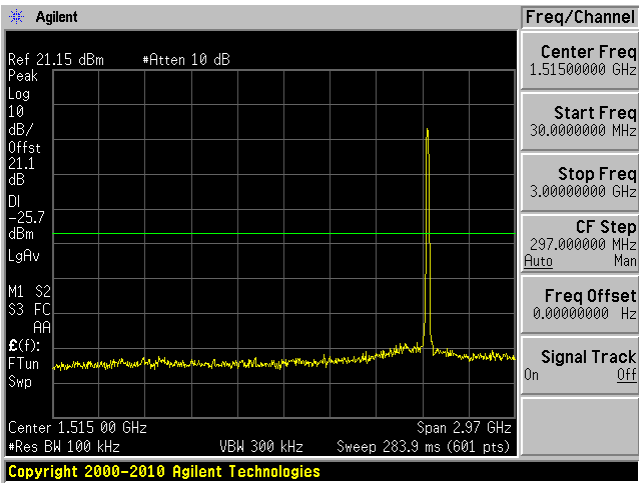


Antenna A High Channel 2462MHz

30MHz – 3GHz

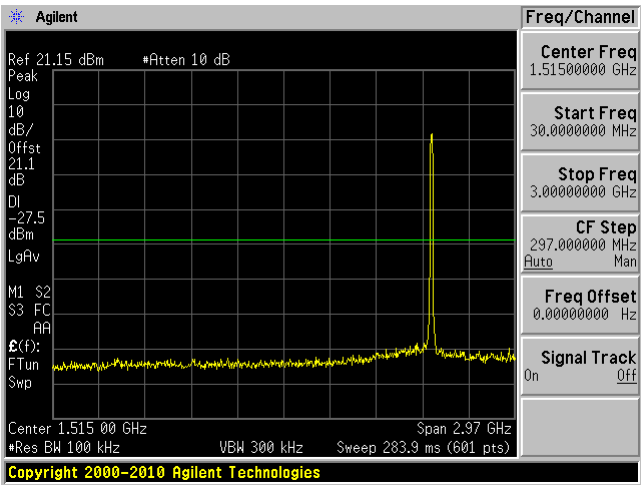


3GHz – 26GHz

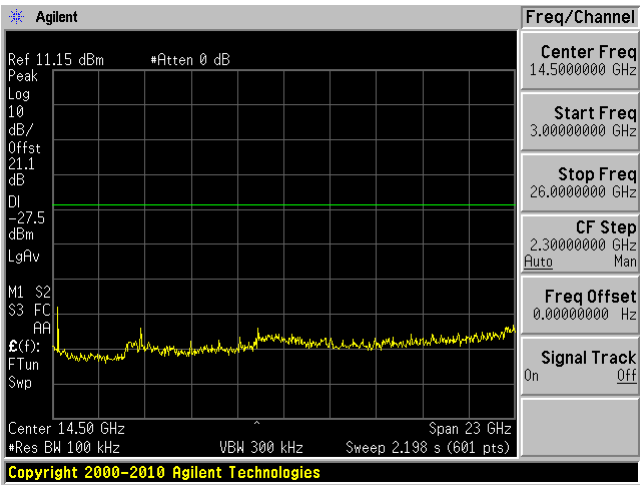


Antenna B Low Channel 2412MHz

30MHz – 3GHz

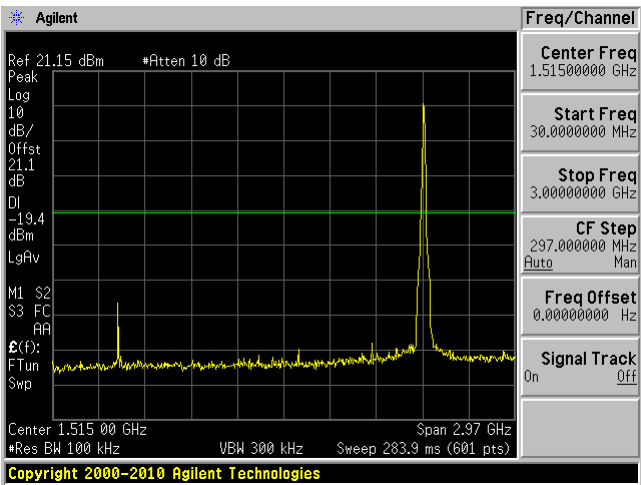


3GHz – 26GHz

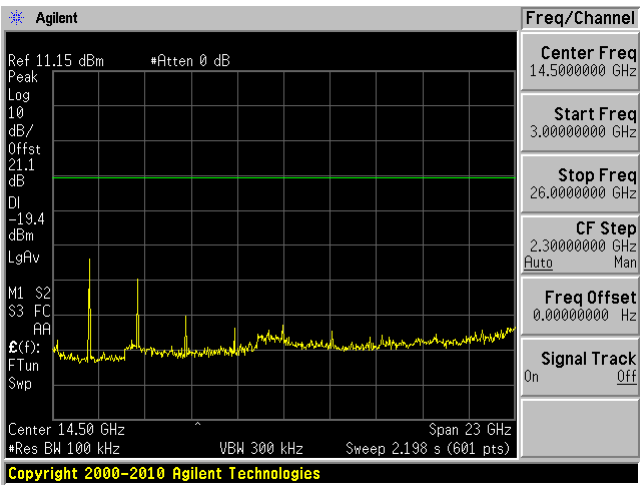


Antenna B Mid Channel 2437MHz

30MHz – 3GHz

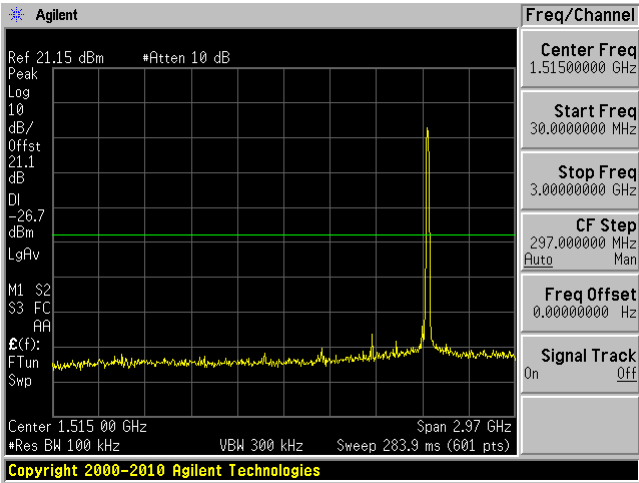


3GHz – 26GHz

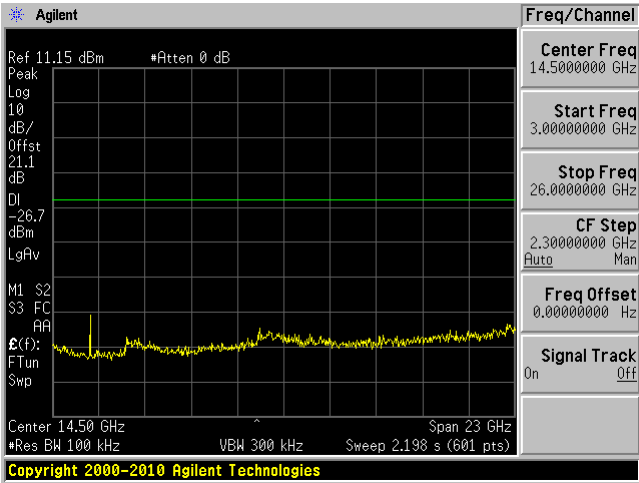


Antenna B High Channel 2462MHz

30MHz – 3GHz

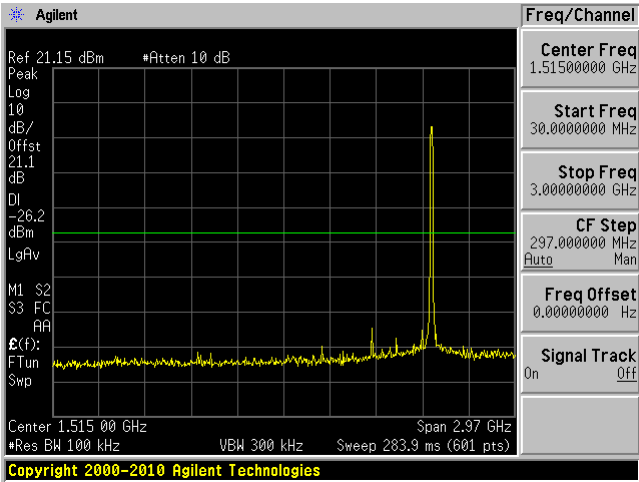


3GHz – 26GHz

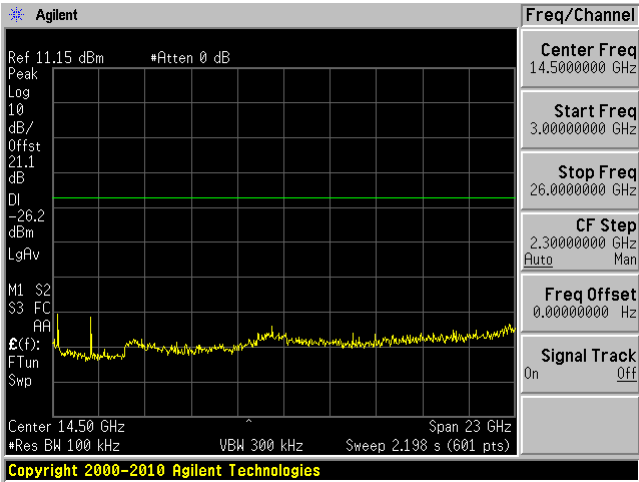


Antenna A Low Channel 2412MHz

3GHz – 26GHz

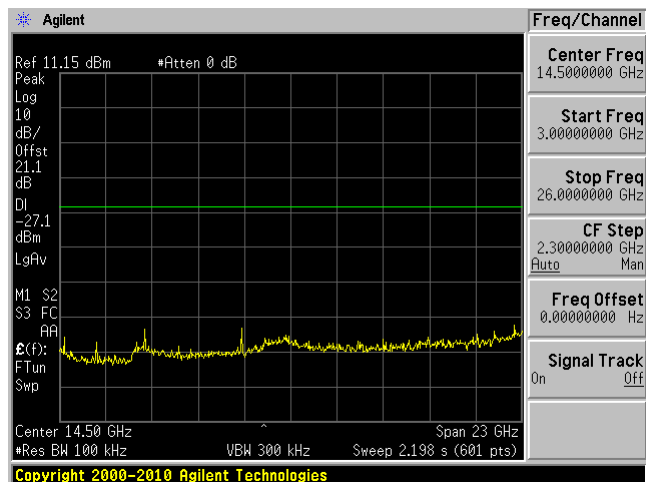


Antenna A Mid Channel 2437MHz

3GHz – 26GHz

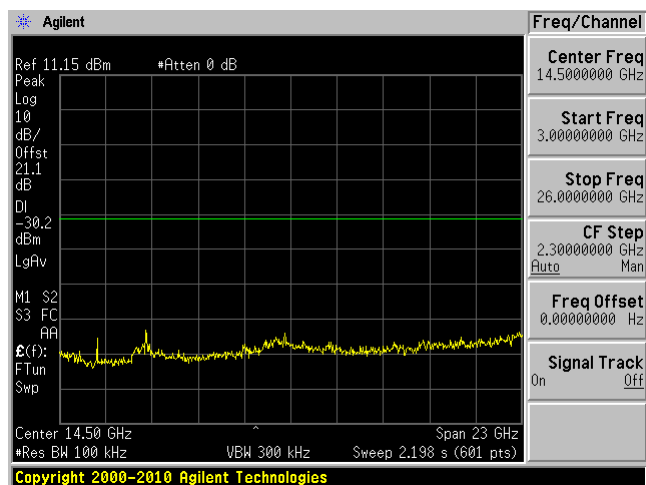


Antenna A High Channel 2462MHz

30MHz – 3GHz

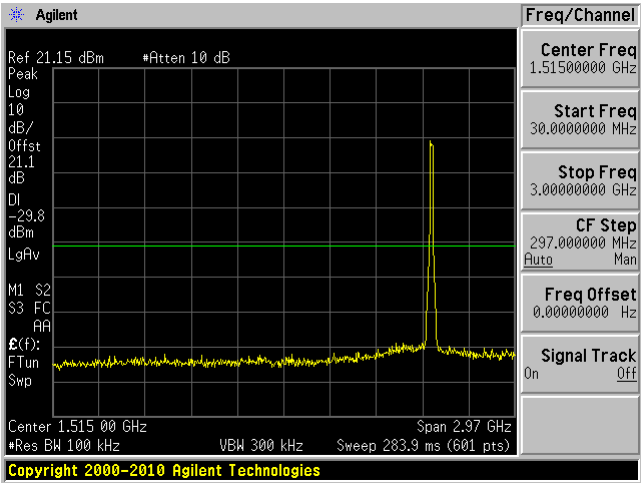


3GHz – 26GHz

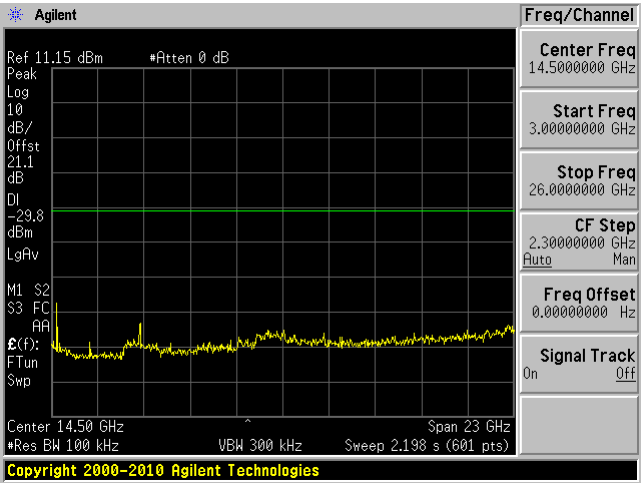


Antenna B Low Channel 2412MHz

30MHz – 3GHz

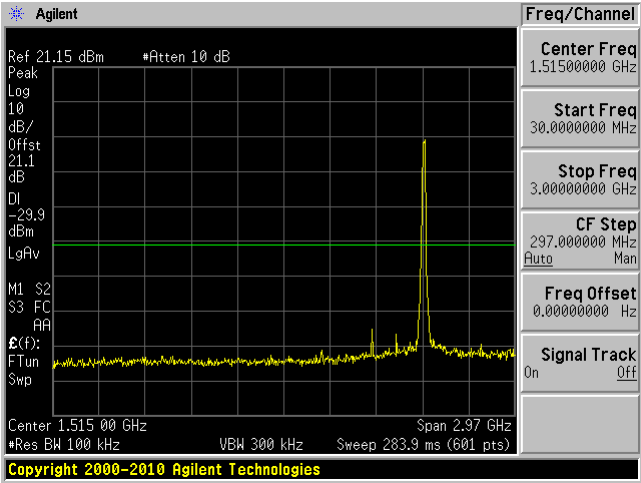


3GHz – 26GHz

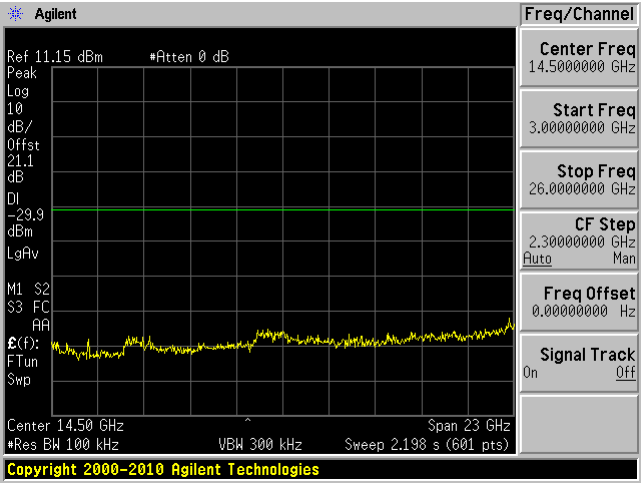


Antenna B Mid Channel 2437MHz

30MHz – 3GHz

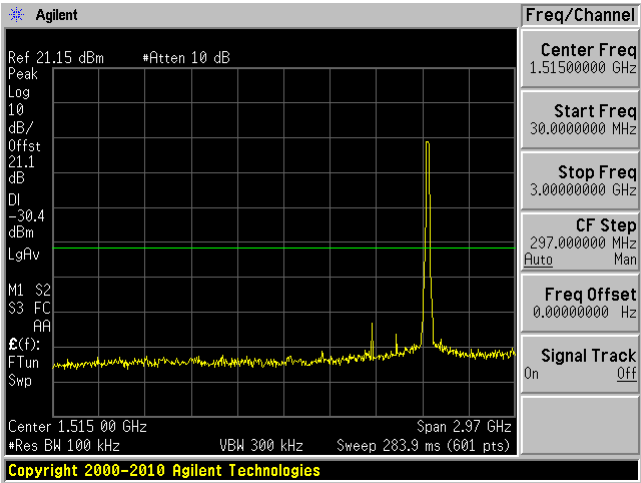


3GHz – 26GHz

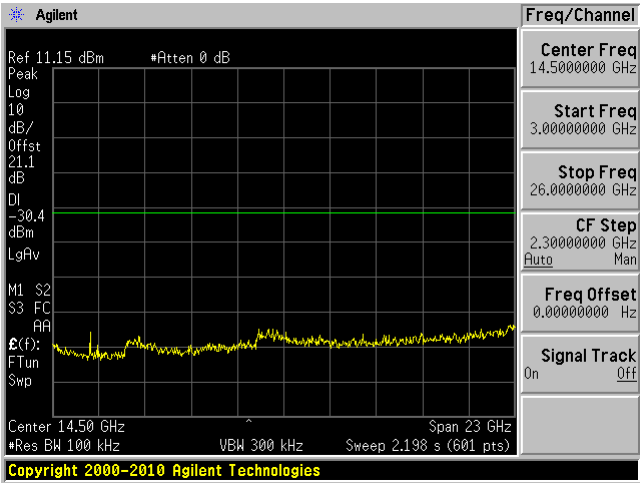


Antenna B High Channel 2462MHz

30MHz – 3GHz

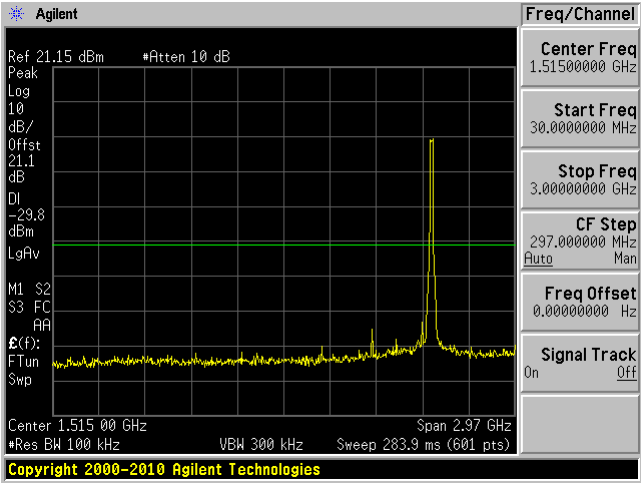


3GHz – 26GHz

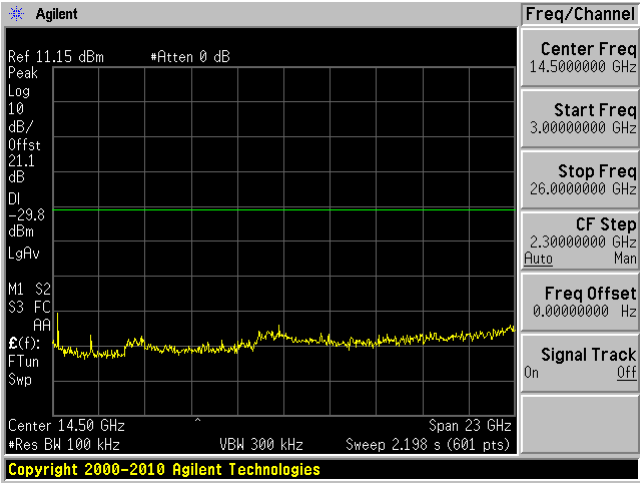


RADIO 2 802.11 n20 mode

Antenna A Low Channel 2412MHz

30MHz – 3GHz

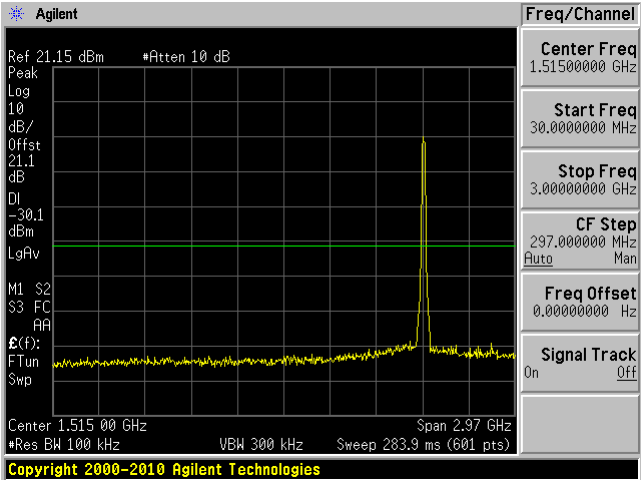


3GHz – 26GHz

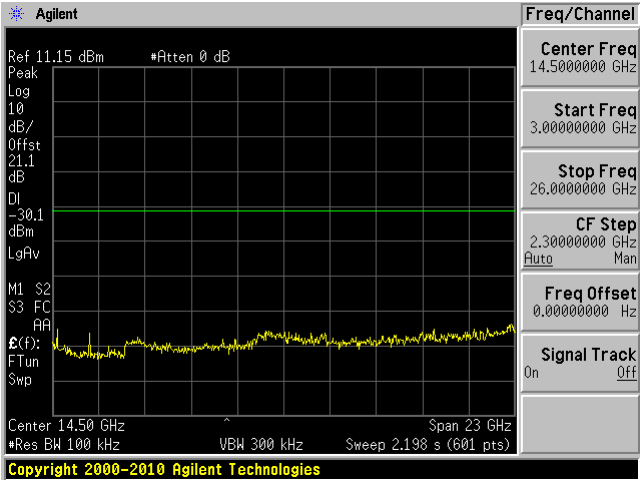


Antenna A Mid Channel 2437MHz

30MHz – 3GHz

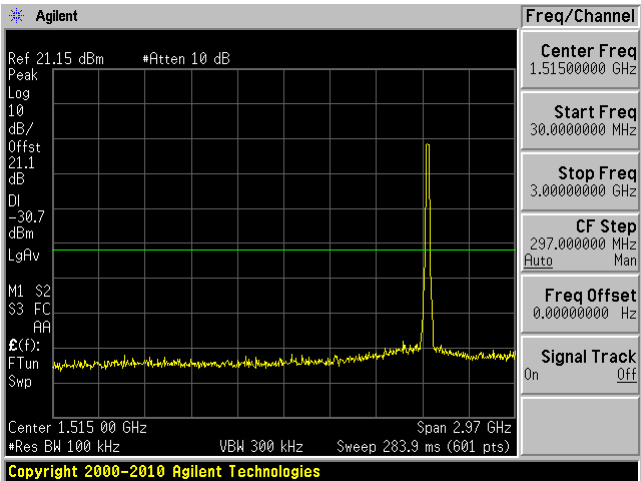


3GHz – 26GHz

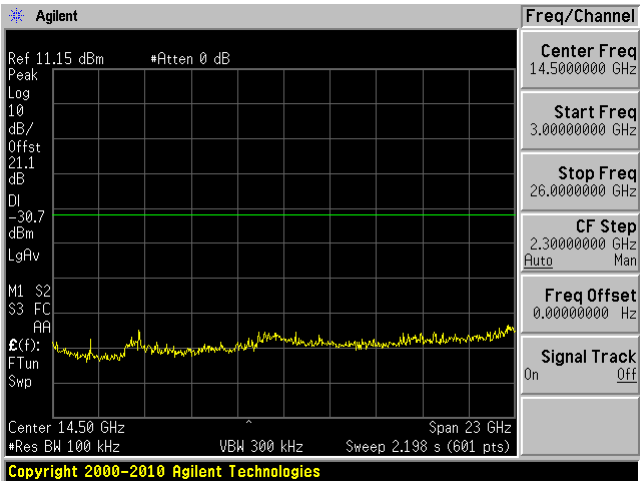


Antenna A High Channel 2462MHz

30MHz – 3GHz

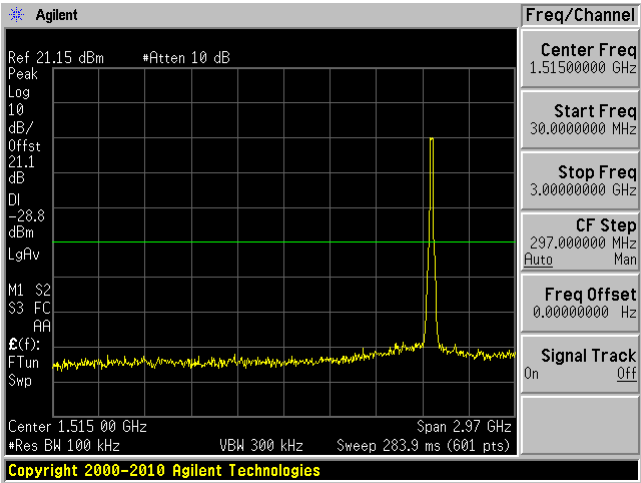


3GHz – 26GHz

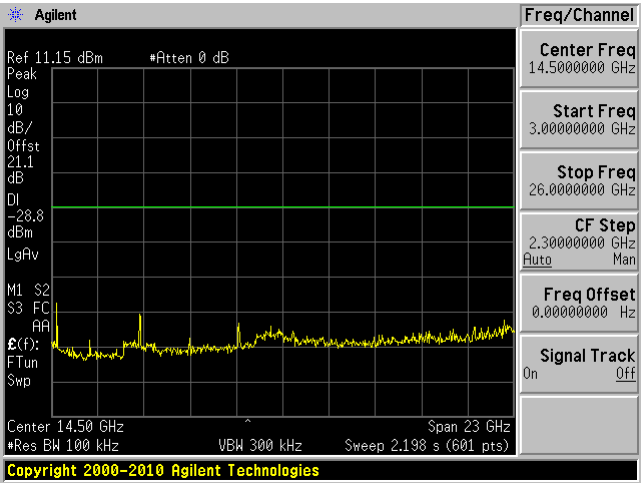


Antenna B Low Channel 2412MHz

30MHz – 3GHz

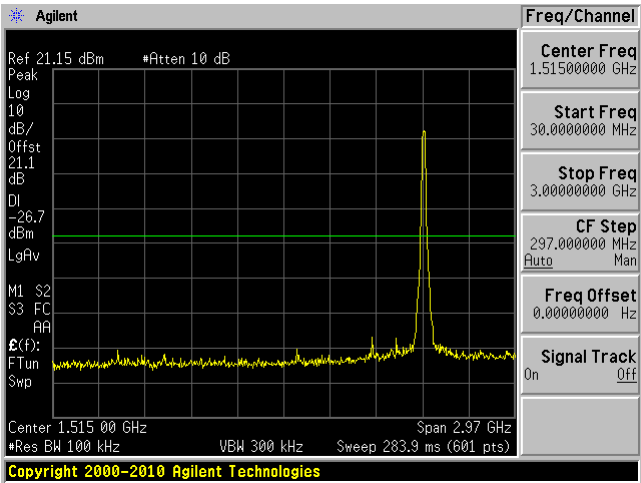


3GHz – 26GHz

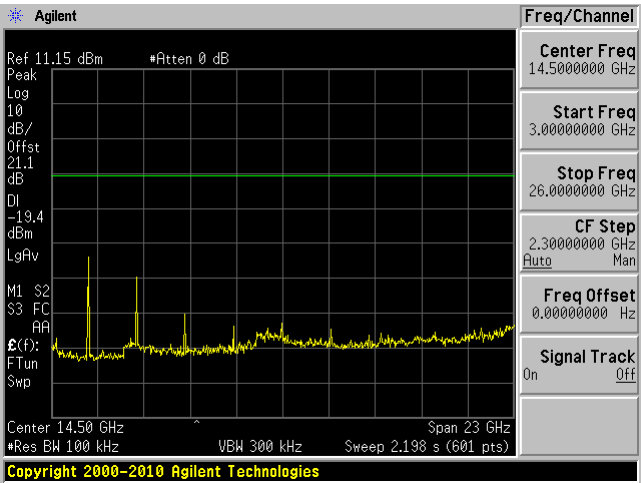


Antenna B Mid Channel 2437MHz

30MHz – 3GHz

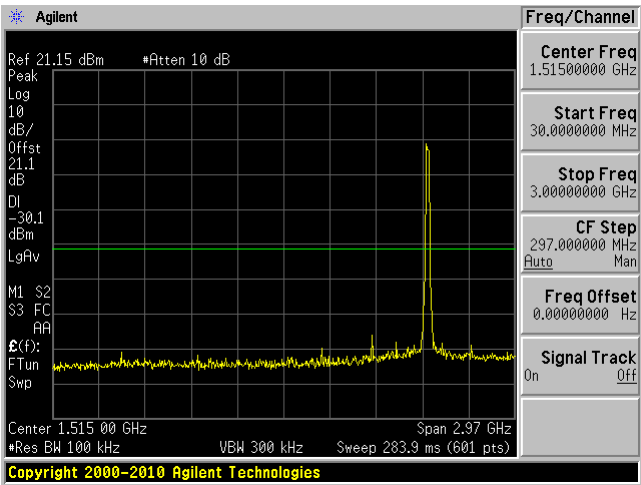


3GHz – 26GHz

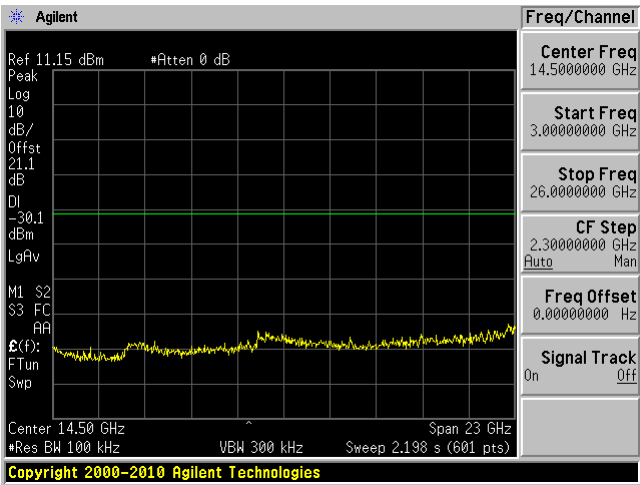


Antenna B High Channel 2462MHz

30MHz – 3GHz

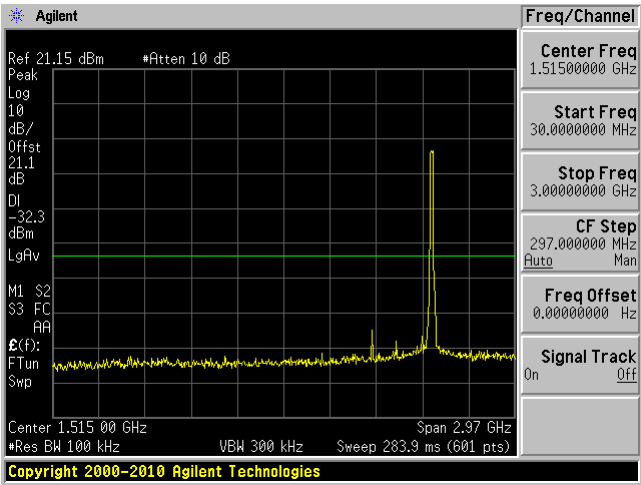


3GHz – 26GHz

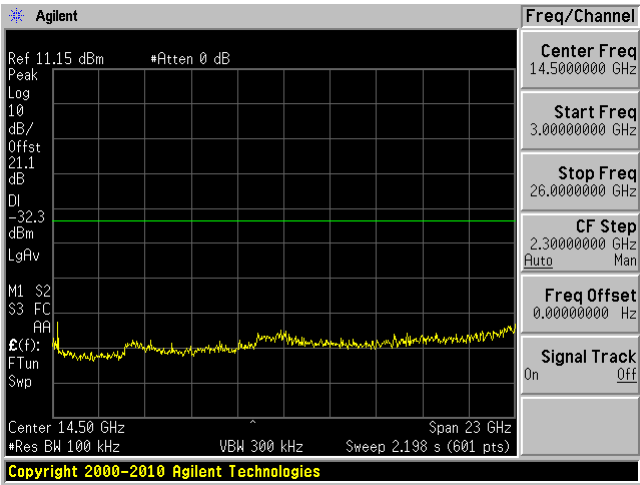

RADIO 2 BLE mode


Low Channel 2402MHz

30MHz – 26GHz

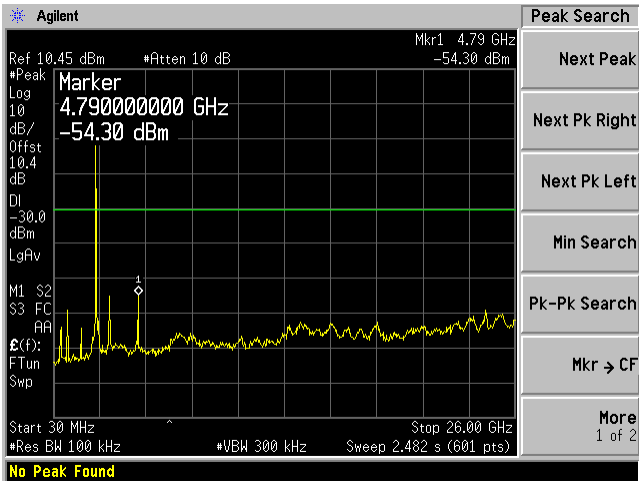


Mid Channel 2440MHz

30MHz – 26GHz

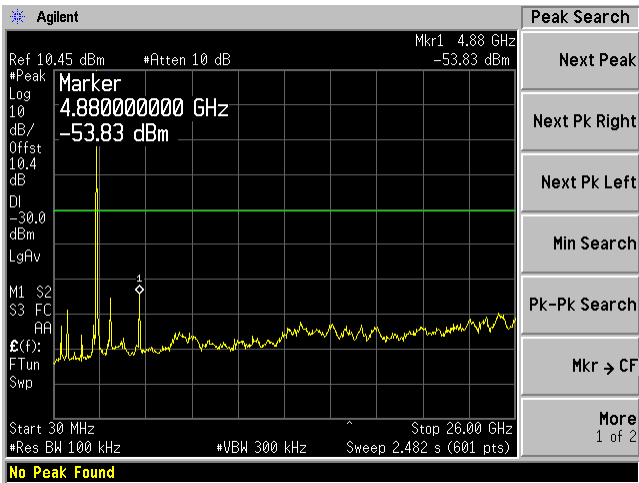

High Channel 2480MHz

30MHz – 26GHz


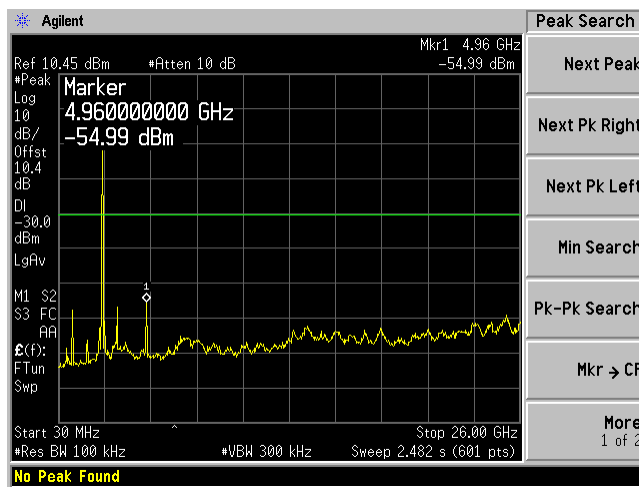


RADIO 1 802.11 b mode

Low Channel 2412MHz


30MHz – 3GHz

3GHz – 26GHz

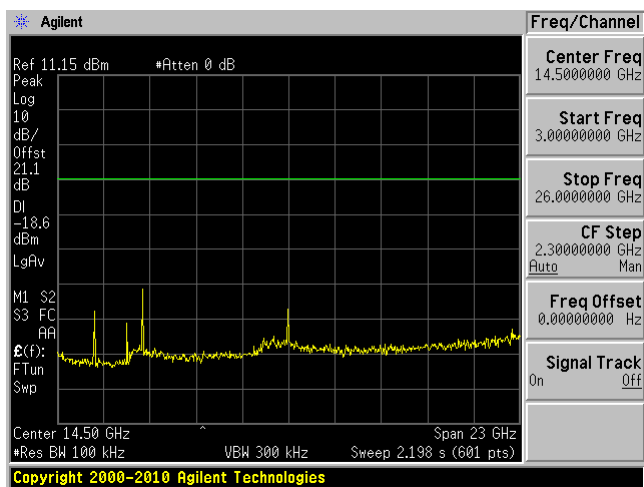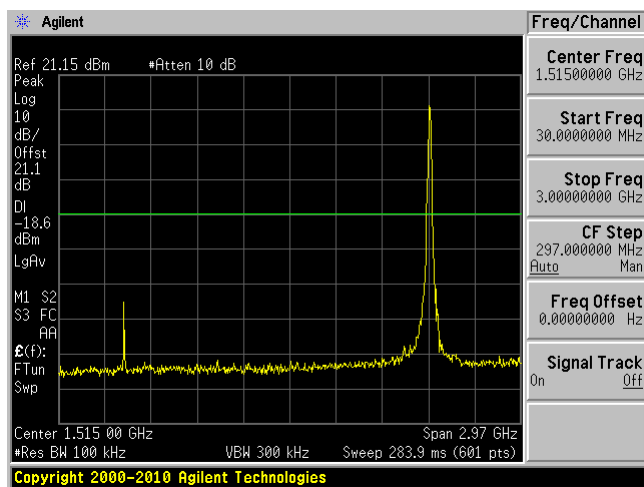


Mid Channel 2437MHz

30MHz – 3GHz

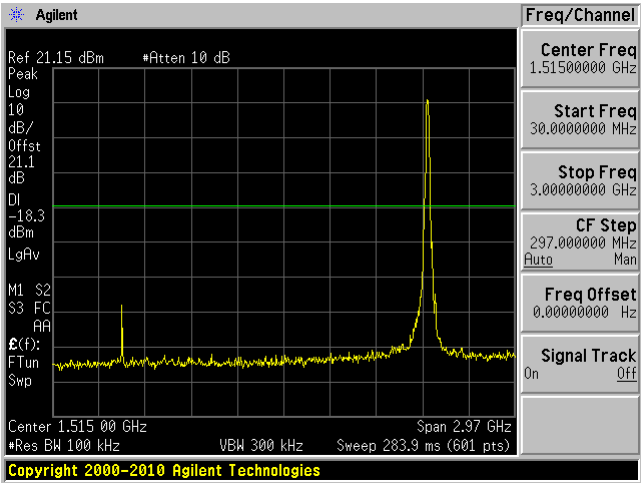


3GHz – 26GHz

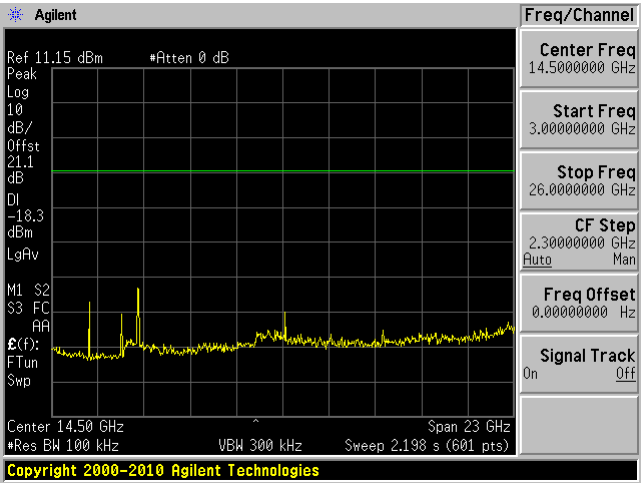


High Channel 2462MHz

30MHz – 3GHz

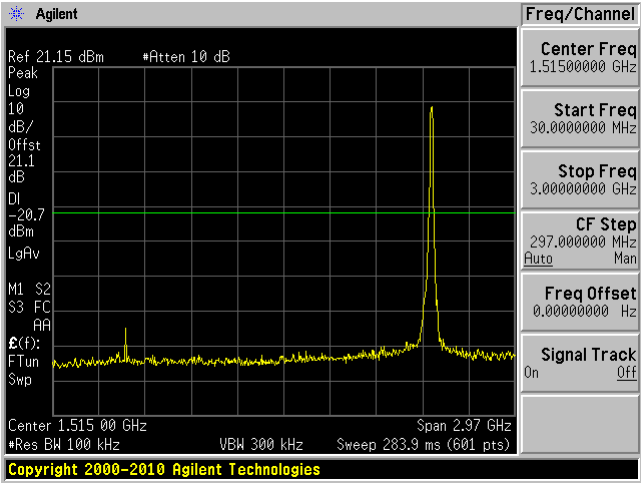


3GHz – 26GHz

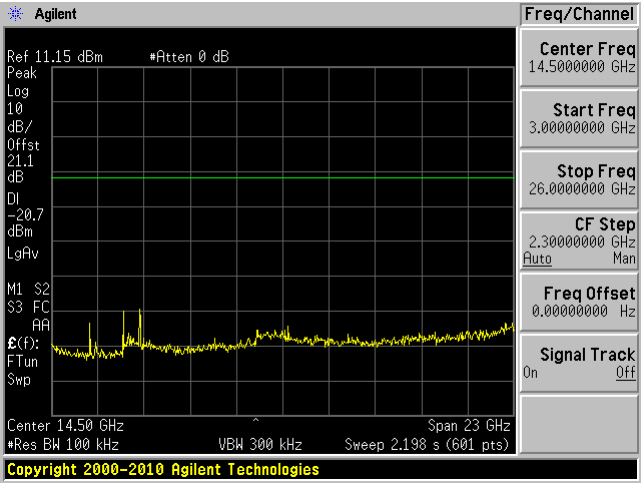


RADIO 1 802.11 g mode

Low Channel 2412MHz

30MHz – 3GHz

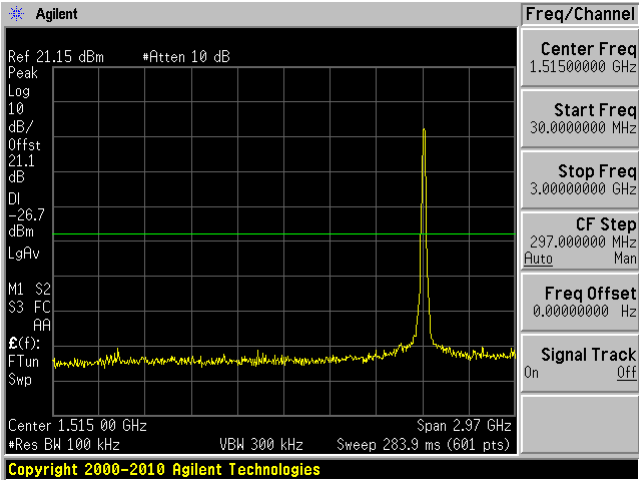


3GHz – 26GHz

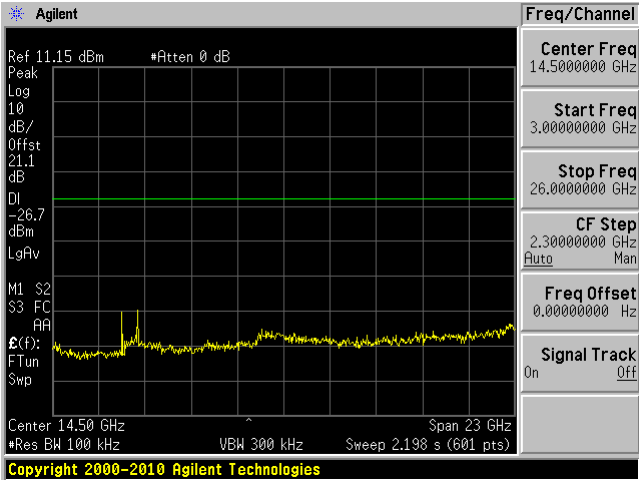


Mid Channel 2437MHz

30MHz – 3GHz

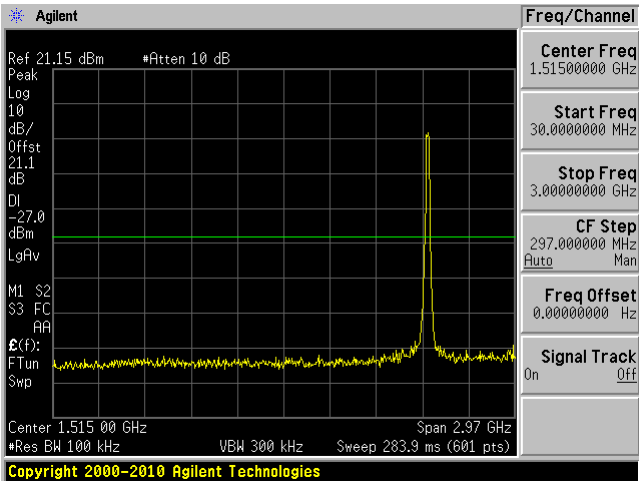


3GHz – 26GHz

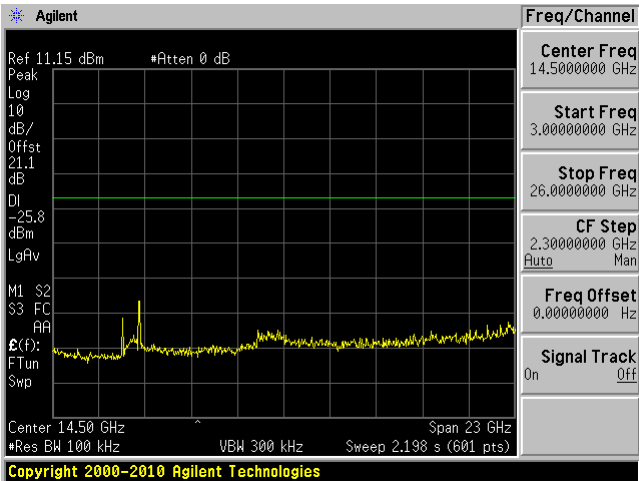


High Channel 2462MHz

30MHz – 3GHz

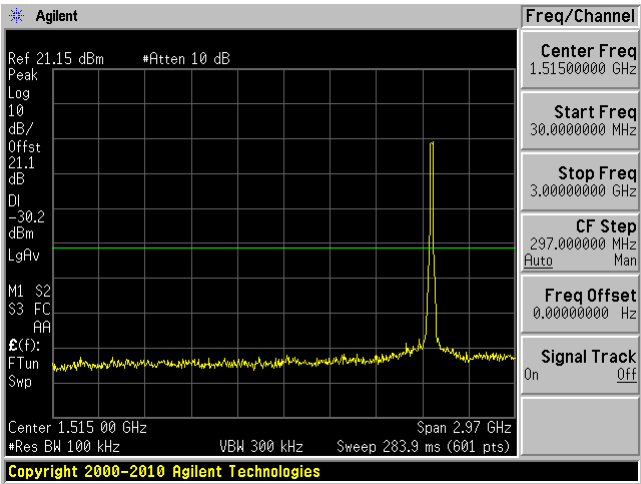


3GHz – 26GHz

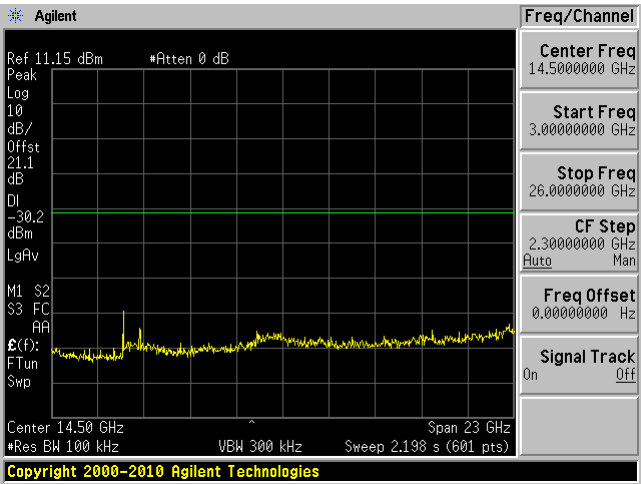


RADIO 1 802.11 n20 mode

Low Channel 2412MHz

30MHz – 3GHz

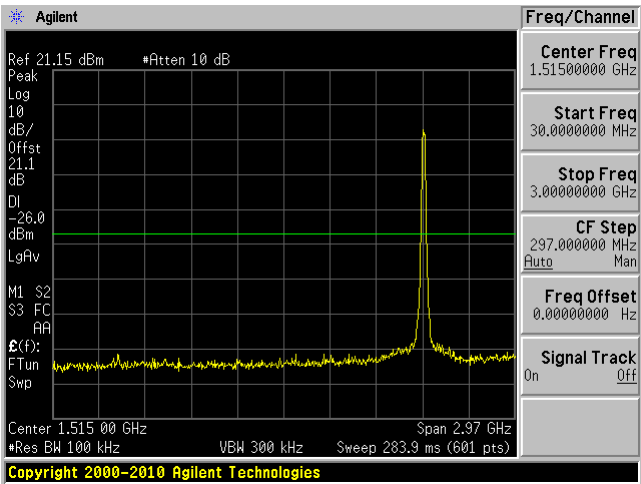


3GHz – 26GHz

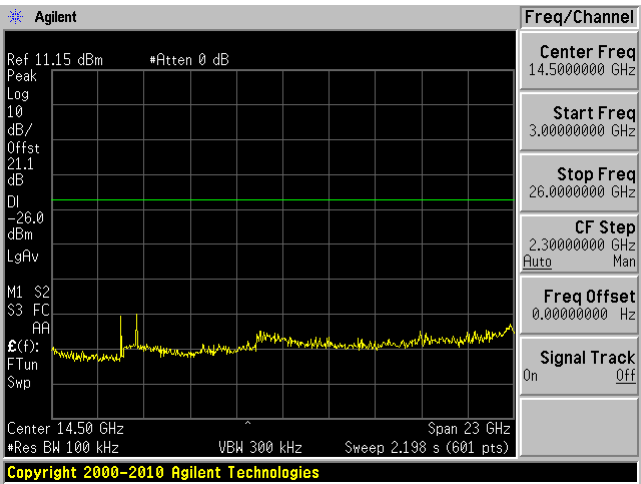


Mid Channel 2437MHz

30MHz – 3GHz

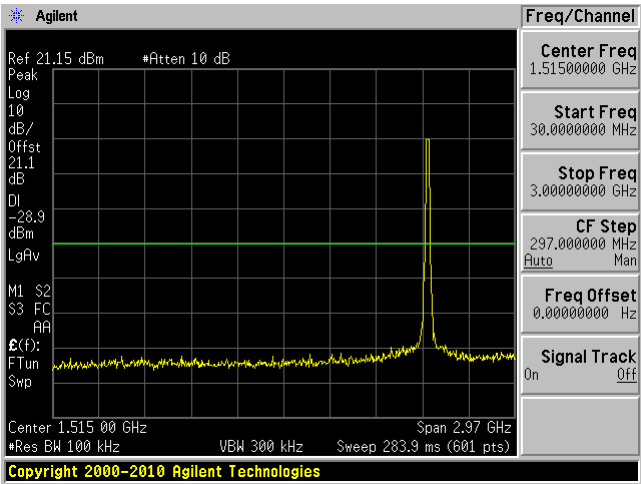


3GHz – 26GHz

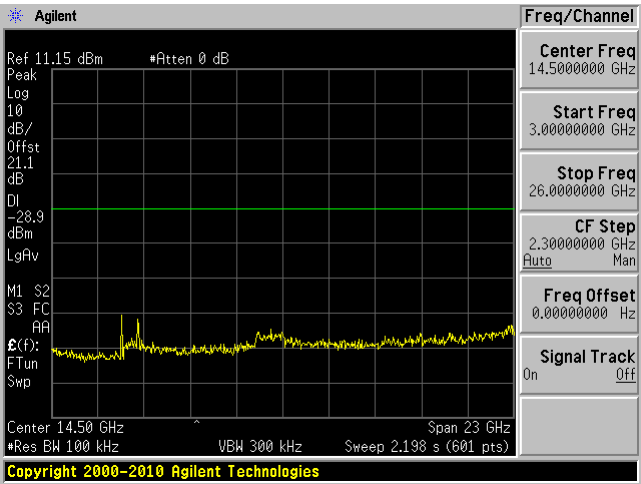


High Channel 2462MHz

30MHz – 3GHz

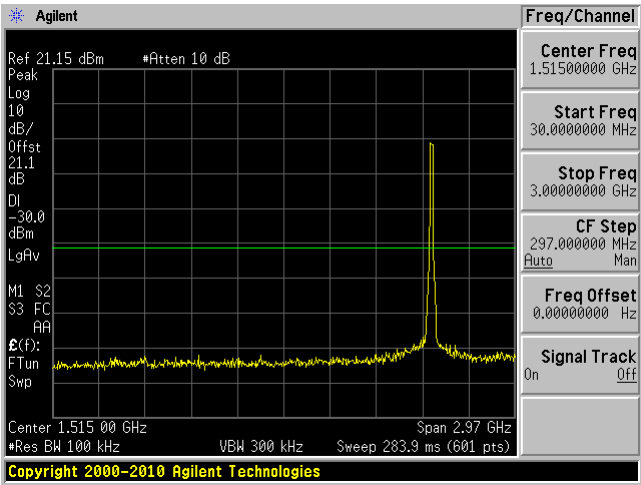

3GHz – 26GHz

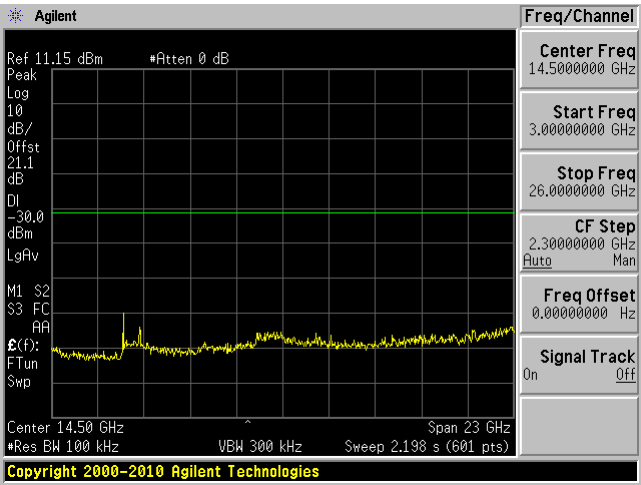

13 Annex A (Normative)- EUT Test Setup Photographs

Please refer to the attachment

14 Annex B (Normative) – EUT External Photographs

Please refer to the attachment

15 Annex C (Normative) – EUT Internal Photographs

Please refer to the attachment

16 Annex E (Normative) – A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets A2LA R222 - *Specific Requirements EPA ENERGY STAR Accreditation Program*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 2nd day of October 2018.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2020
Revised June 5, 2019

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---