


Site: AC1	Time: 2018/11/30 - 14:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz (CDD Mode)	

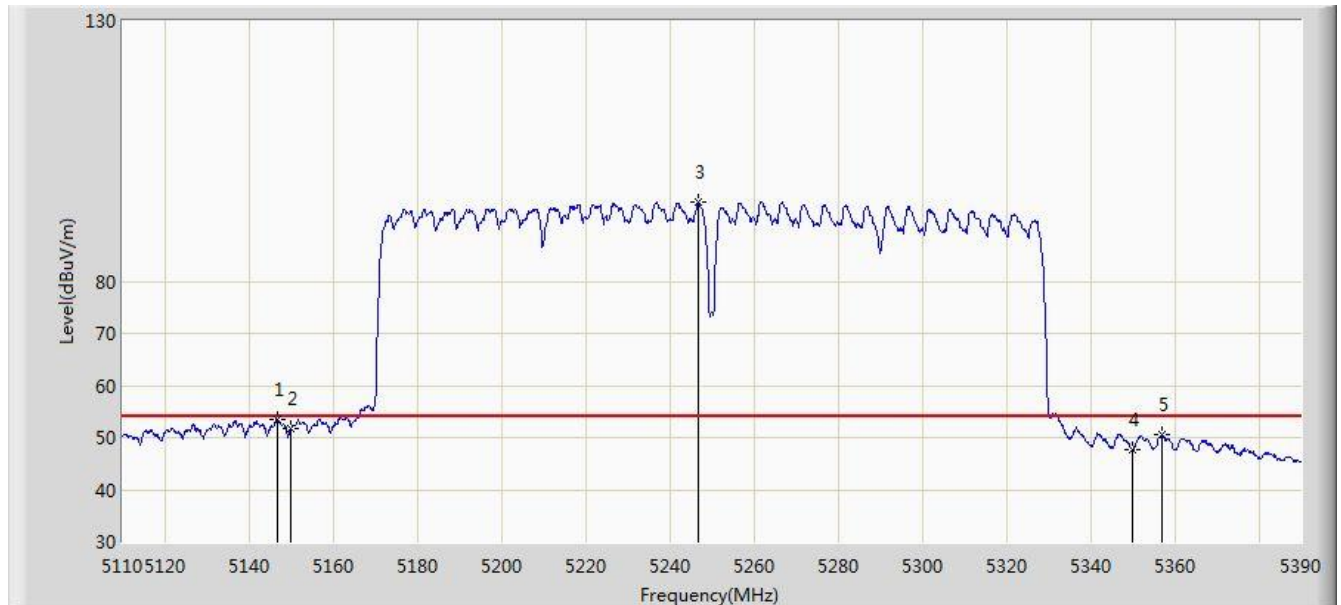


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.820	53.409	49.233	-0.591	54.000	4.176	AV
2			5150.000	51.634	47.465	-2.366	54.000	4.170	AV
3		*	5246.920	95.213	91.353	N/A	N/A	3.859	AV
4			5350.000	47.754	43.849	-6.246	54.000	3.904	AV
5			5357.100	50.470	46.552	-3.530	54.000	3.917	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz (CDD Mode)	

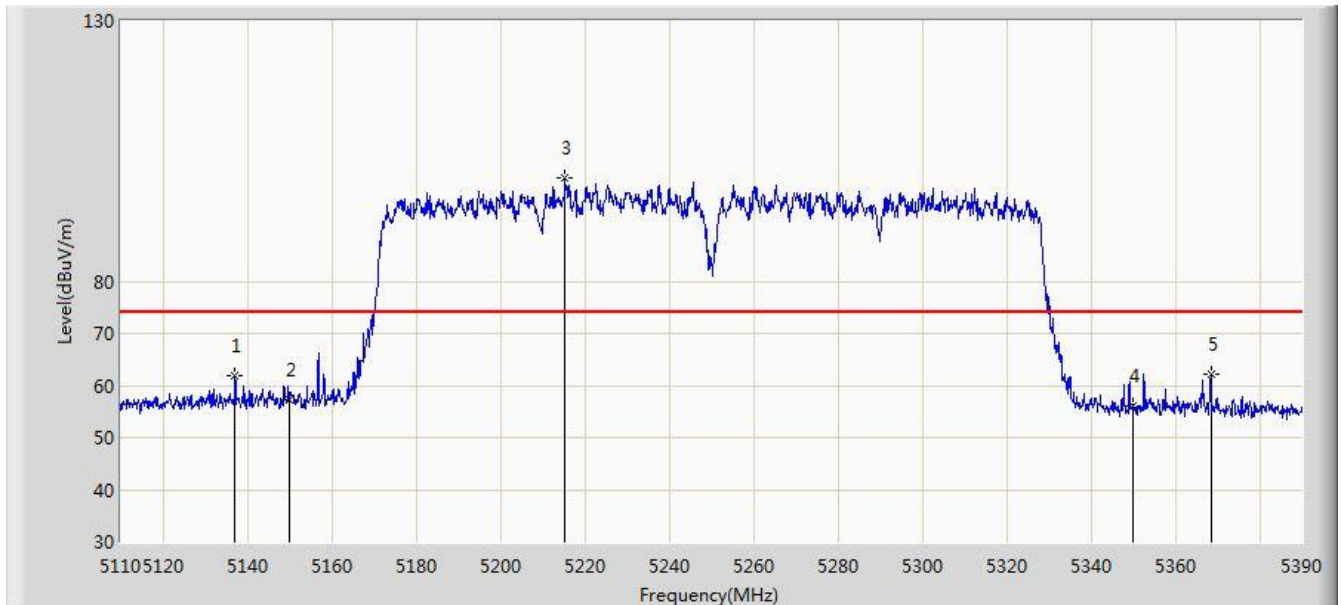


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.160	61.836	57.661	-12.164	74.000	4.175	PK
2			5150.000	57.362	53.193	-16.638	74.000	4.170	PK
3		*	5215.420	99.932	95.979	N/A	N/A	3.953	PK
4			5350.000	56.113	52.208	-17.887	74.000	3.904	PK
5			5368.440	62.307	58.369	-11.693	74.000	3.938	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz (CDD Mode)	

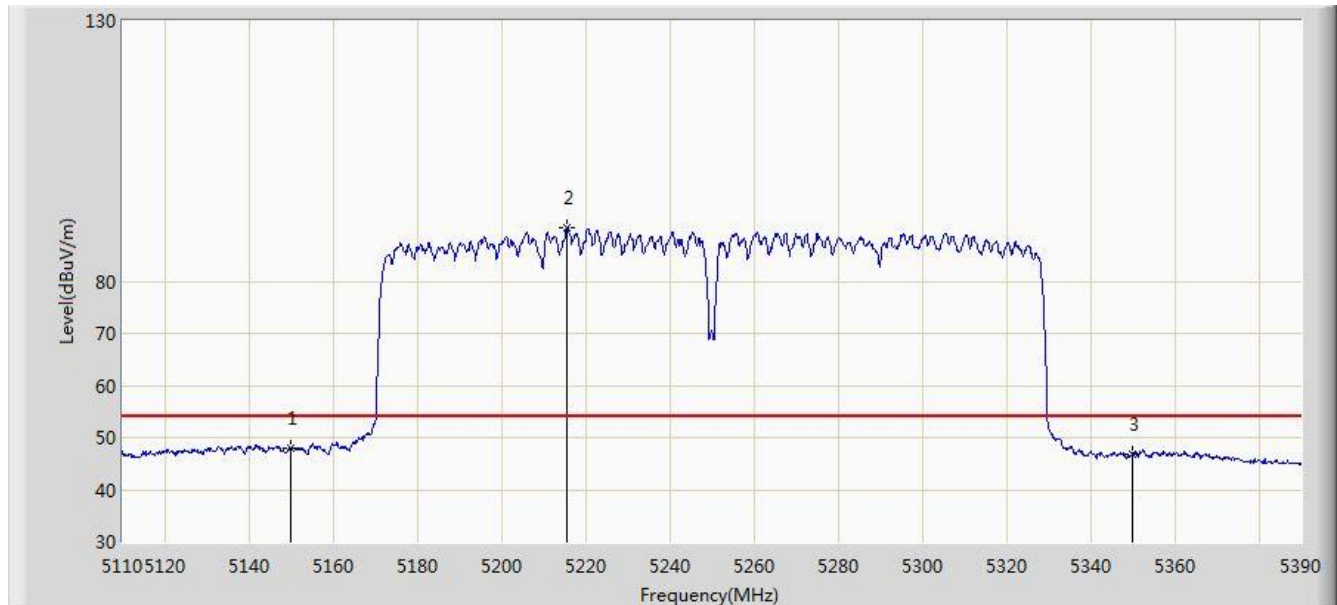


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.911	43.742	-6.089	54.000	4.170	AV
2		*	5215.700	90.206	86.254	N/A	N/A	3.951	AV
3			5350.000	46.860	42.955	-7.140	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5570MHz (CDD Mode)	

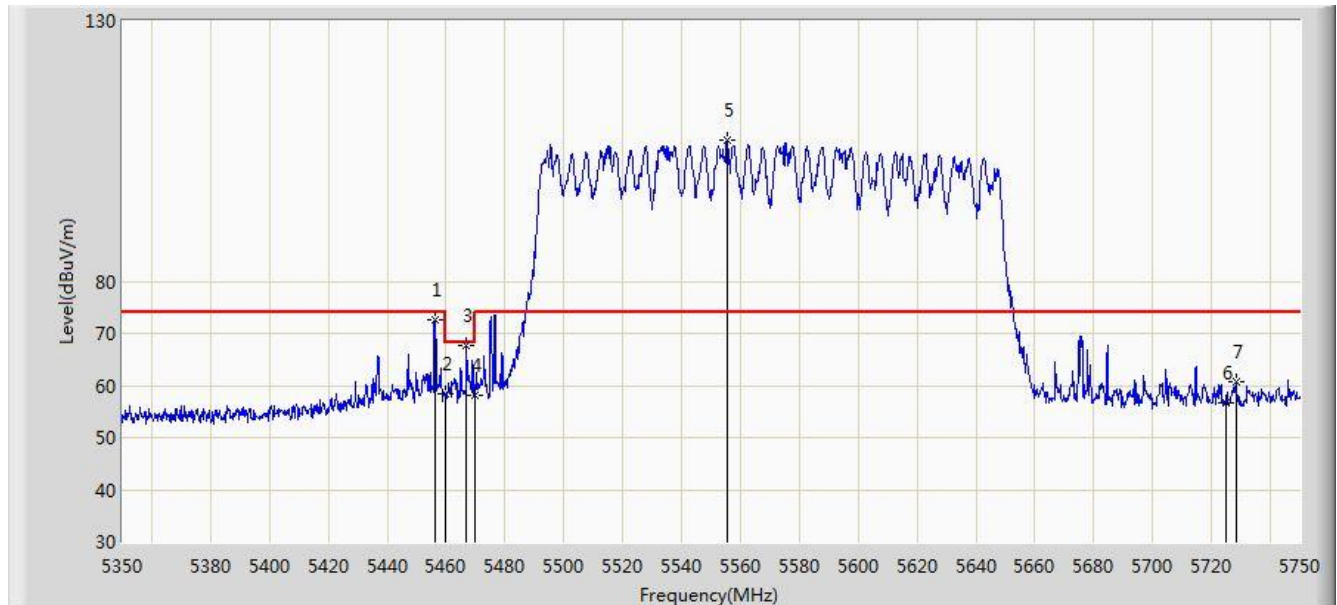


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.400	72.704	68.531	-1.296	74.000	4.172	PK
2			5460.000	58.526	54.346	-15.474	74.000	4.180	PK
3			5467.000	67.754	63.558	-0.446	68.200	4.196	PK
4			5470.000	58.130	53.928	-10.070	68.200	4.202	PK
5		*	5555.400	106.995	102.562	N/A	N/A	4.432	PK
6			5725.000	56.525	51.496	-17.475	74.000	5.029	PK
7			5728.200	60.822	55.773	-13.178	74.000	5.049	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5570MHz (CDD Mode)	

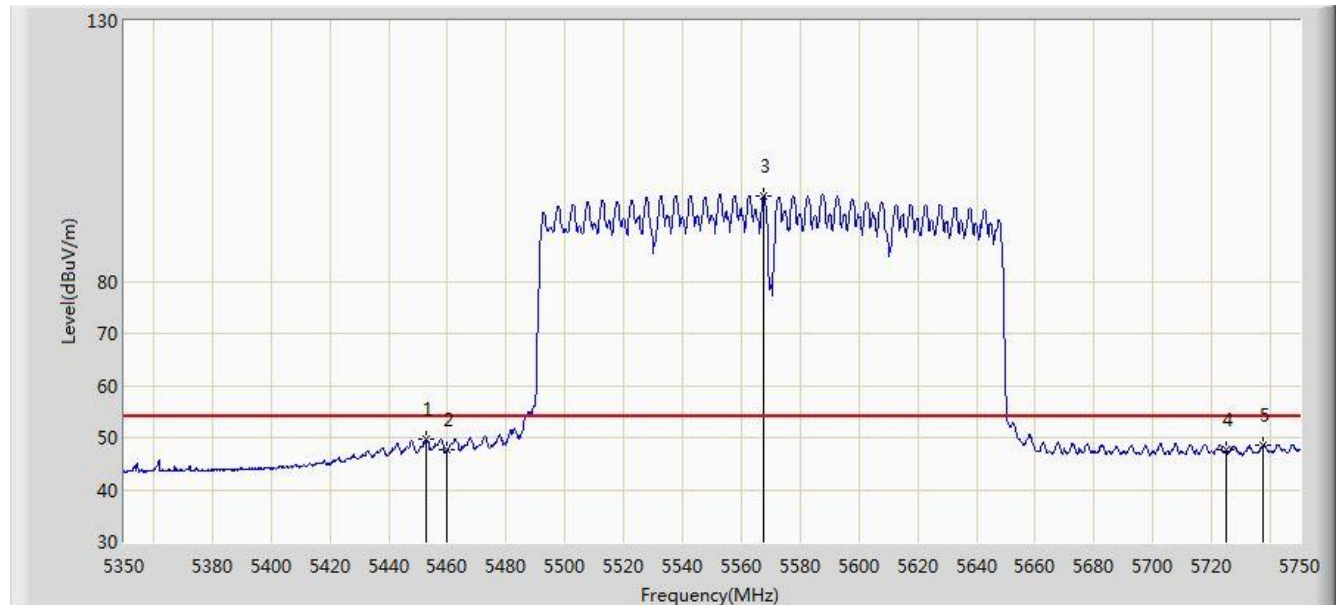


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.000	49.831	45.667	-4.169	54.000	4.164	AV
2			5460.000	47.763	43.583	-6.237	54.000	4.180	AV
3		*	5567.600	96.375	91.918	N/A	N/A	4.457	AV
4			5725.000	47.613	42.584	-6.387	54.000	5.029	AV
5			5737.400	48.487	43.379	-5.513	54.000	5.108	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5570MHz (CDD Mode)	

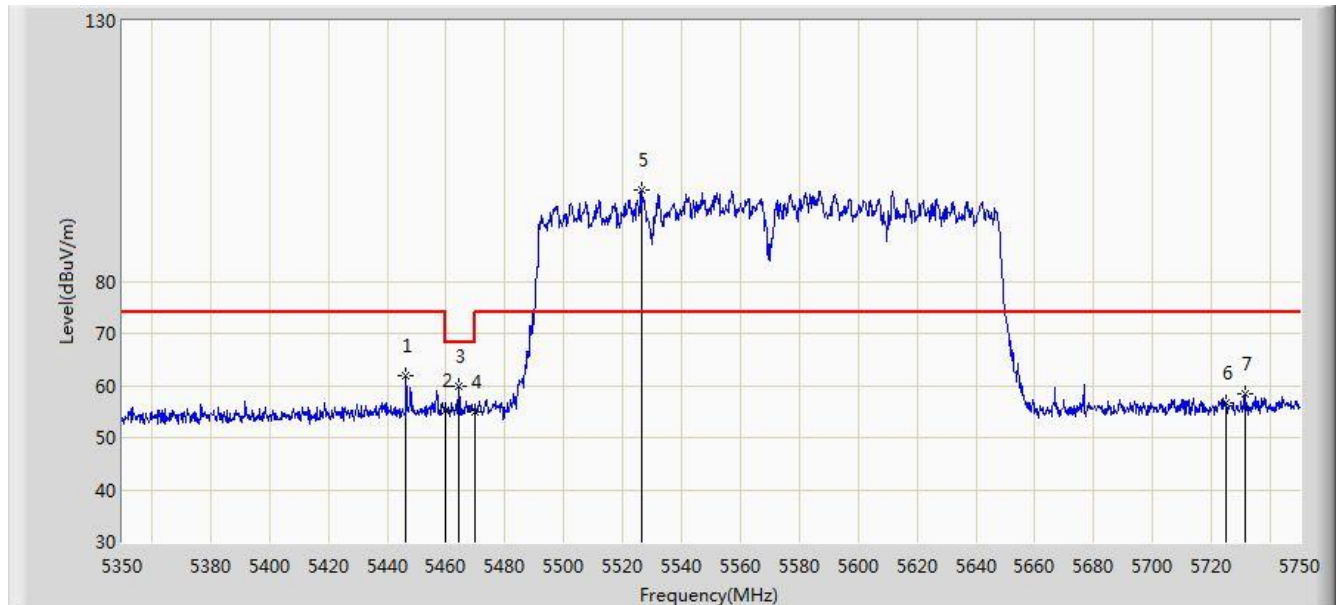


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.400	61.850	57.707	-12.150	74.000	4.143	PK
2			5460.000	55.171	50.991	-18.829	74.000	4.180	PK
3			5464.200	59.940	55.751	-8.260	68.200	4.189	PK
4			5470.000	55.049	50.847	-13.151	68.200	4.202	PK
5		*	5526.200	97.618	93.268	N/A	N/A	4.349	PK
6			5725.000	56.562	51.533	-17.438	74.000	5.029	PK
7			5731.600	58.373	53.302	-15.627	74.000	5.071	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5570MHz (CDD Mode)	

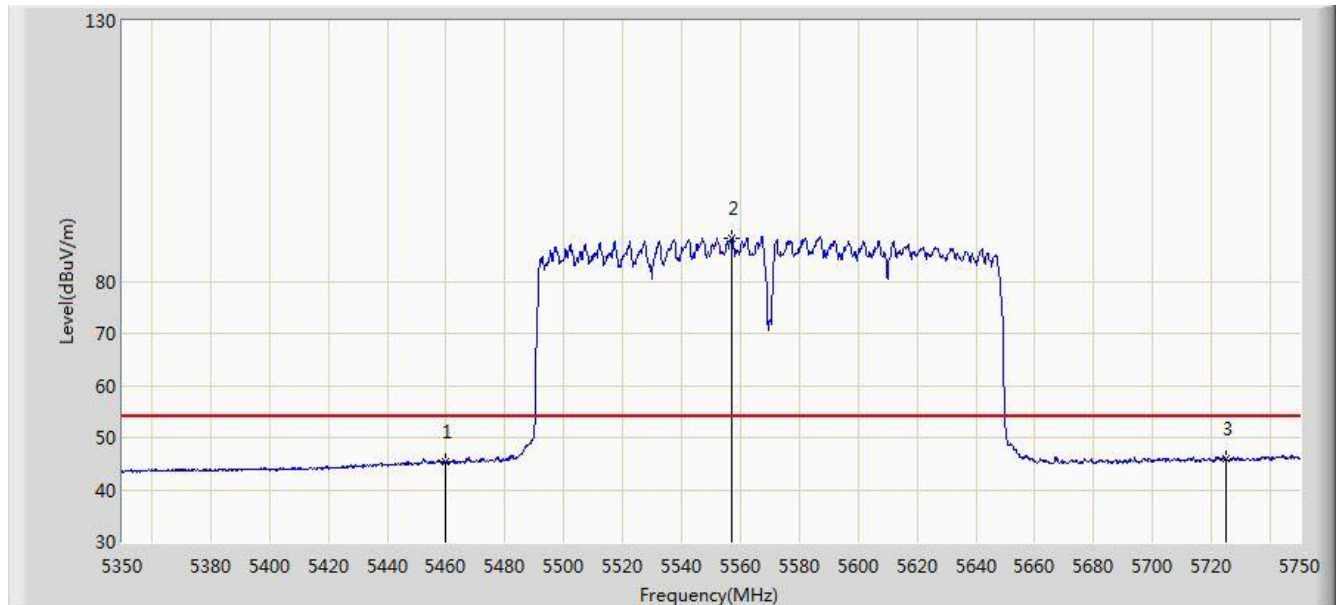


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.455	41.275	-8.545	54.000	4.180	AV
2		*	5557.200	88.386	83.949	N/A	N/A	4.437	AV
3			5725.000	45.966	40.937	-8.034	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 23:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode)	

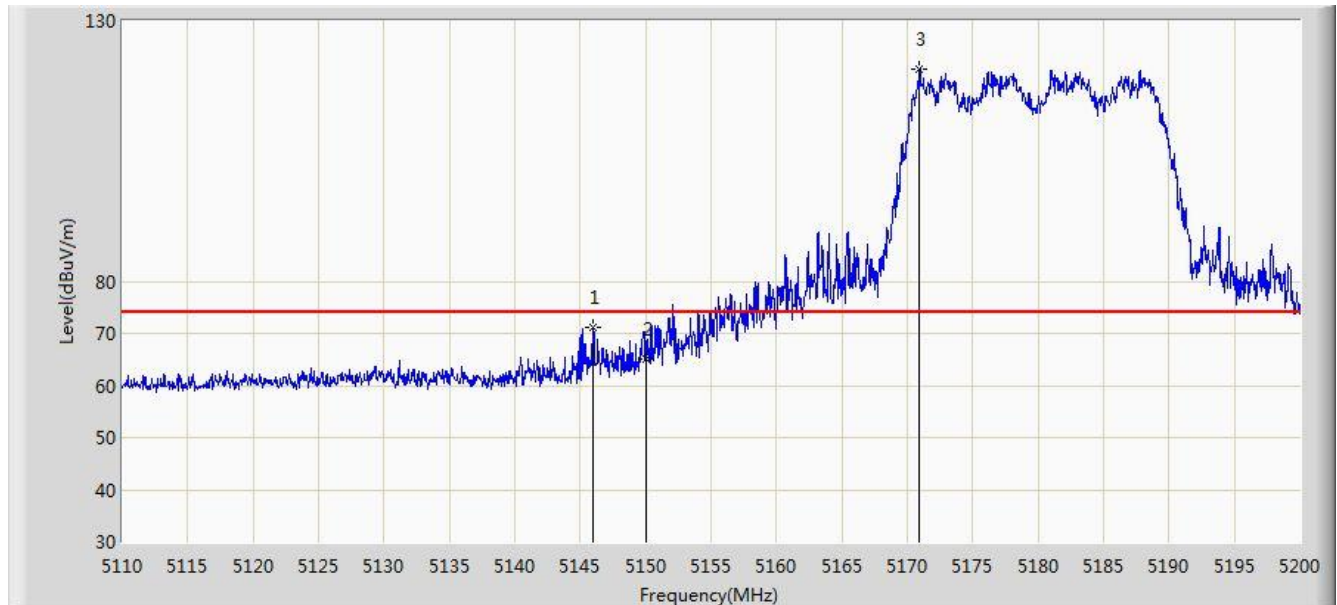


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.000	71.182	67.006	-2.818	74.000	4.176	PK
2			5150.000	65.070	60.901	-8.930	74.000	4.170	PK
3		*	5170.930	120.733	116.632	N/A	N/A	4.101	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 23:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode)	

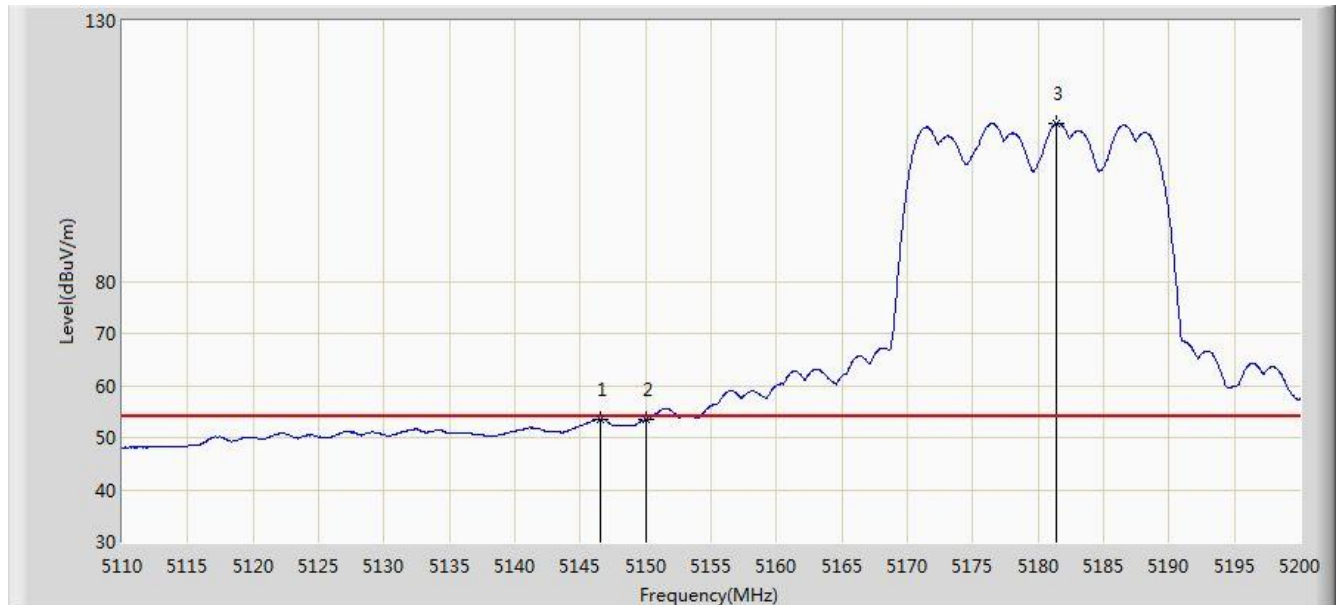


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.495	53.533	49.357	-0.467	54.000	4.176	AV
2			5150.000	53.415	49.246	-0.585	54.000	4.170	AV
3	X	*	5181.370	110.314	106.250	N/A	N/A	4.064	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 23:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode)	

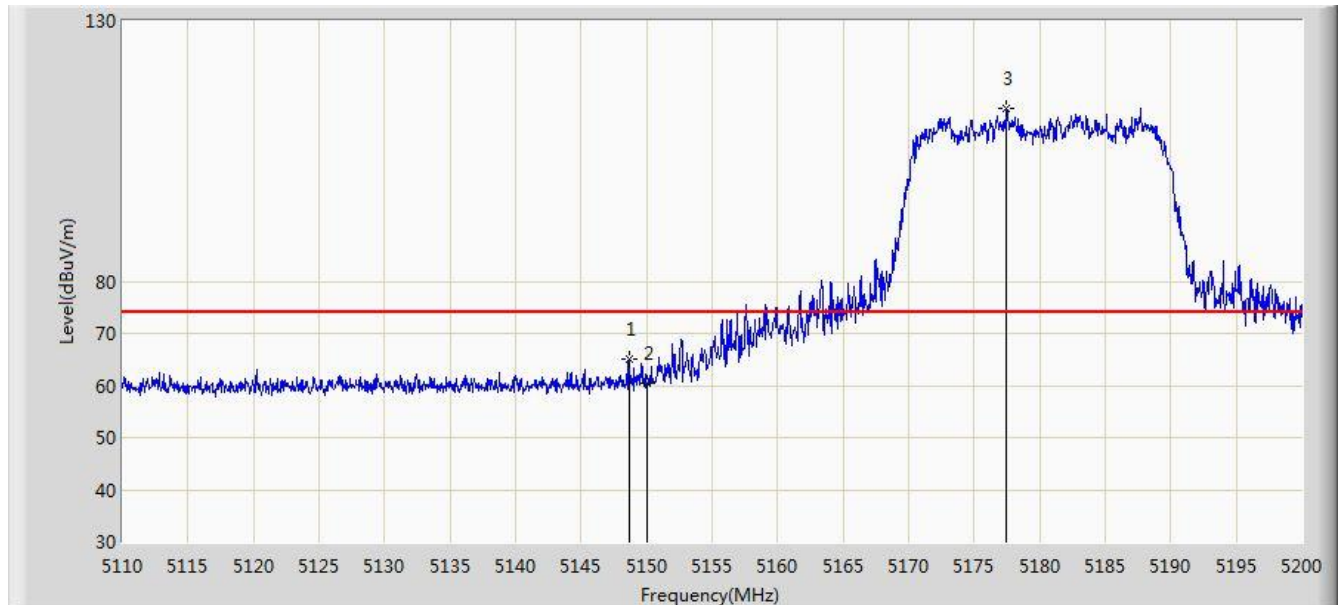


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.655	64.953	60.779	-9.047	74.000	4.174	PK
2			5150.000	60.426	56.257	-13.574	74.000	4.170	PK
3		*	5177.455	113.130	109.052	N/A	N/A	4.078	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 23:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode)	

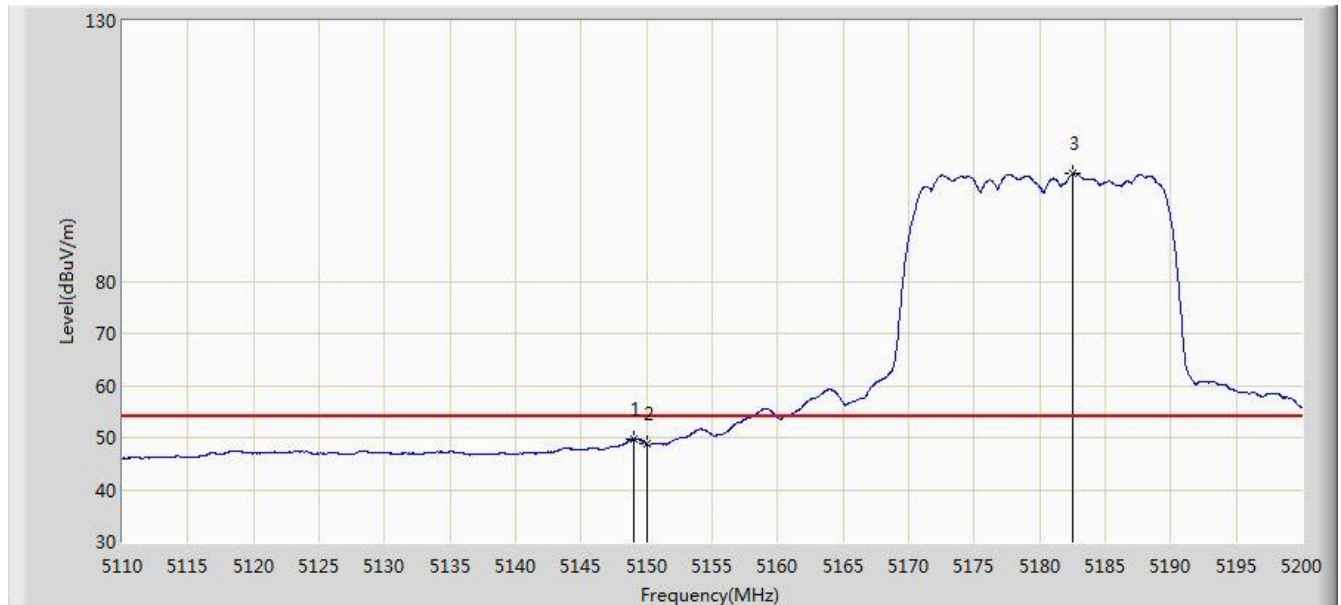


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.970	49.742	45.569	-4.258	54.000	4.173	AV
2			5150.000	48.747	44.578	-5.253	54.000	4.170	AV
3		*	5182.540	100.703	96.643	N/A	N/A	4.060	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 23:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz (CDD Mode)	

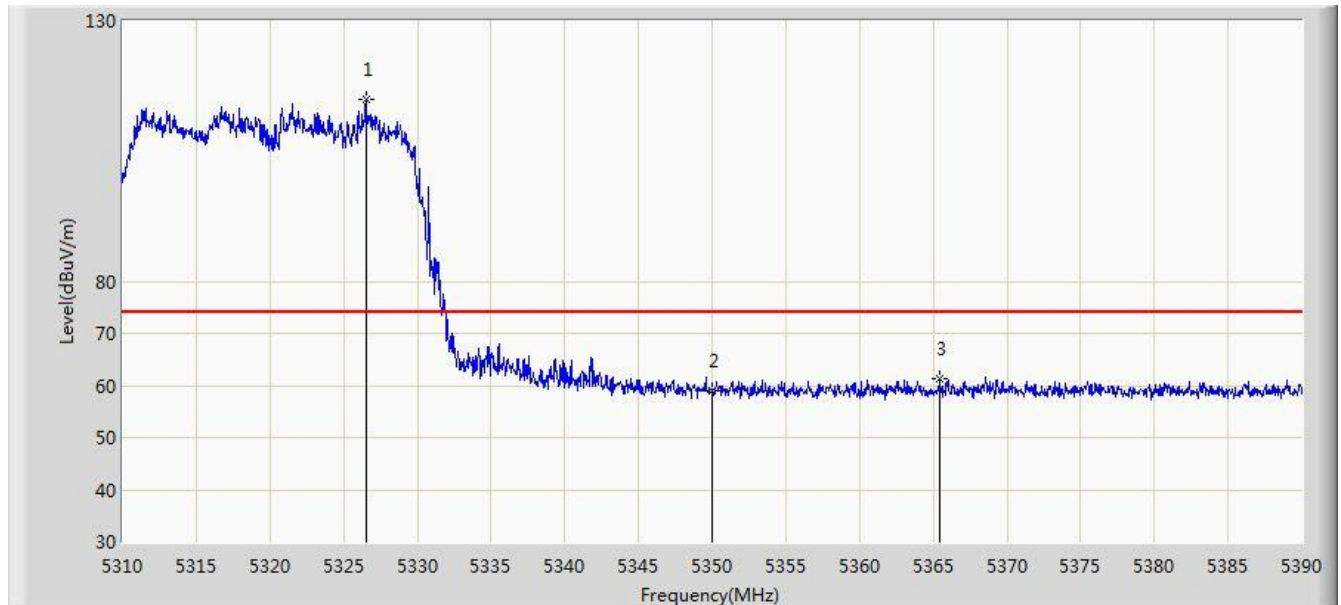


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.520	114.847	110.986	N/A	N/A	3.862	PK
2			5350.000	59.130	55.225	-14.870	74.000	3.904	PK
3			5365.440	61.219	57.286	-12.781	74.000	3.933	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 23:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz (CDD Mode)	

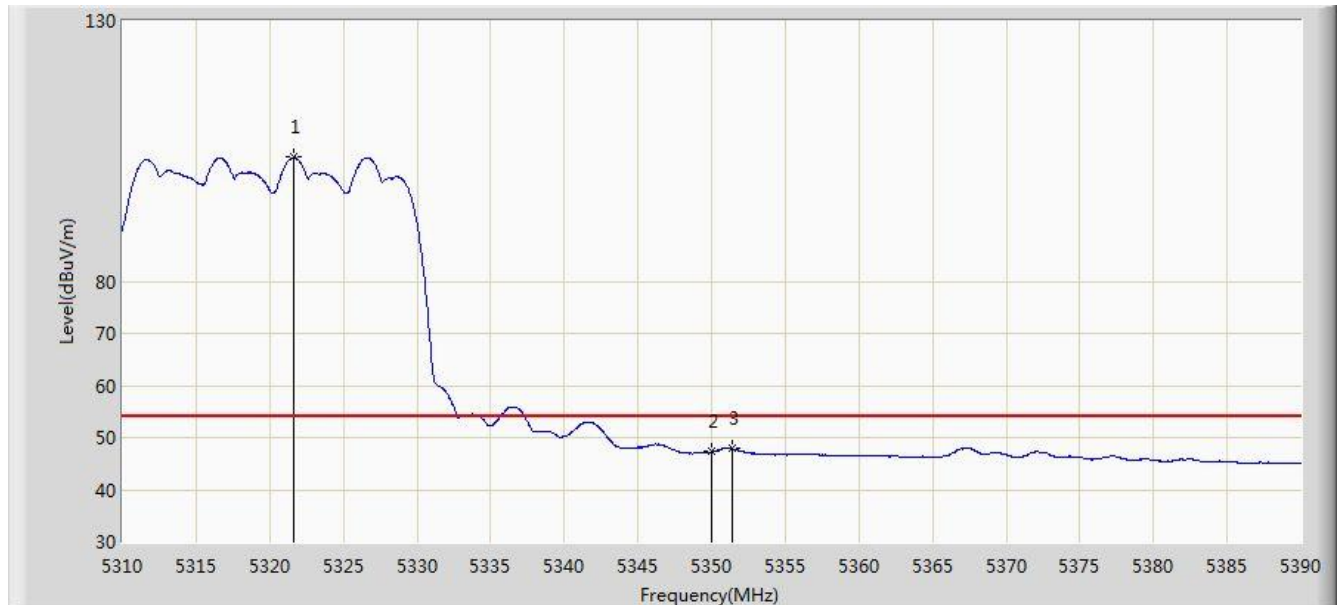


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.640	103.786	99.934	N/A	N/A	3.852	AV
2			5350.000	47.272	43.367	-6.728	54.000	3.904	AV
3			5351.400	47.894	43.987	-6.106	54.000	3.907	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 23:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz (CDD Mode)	

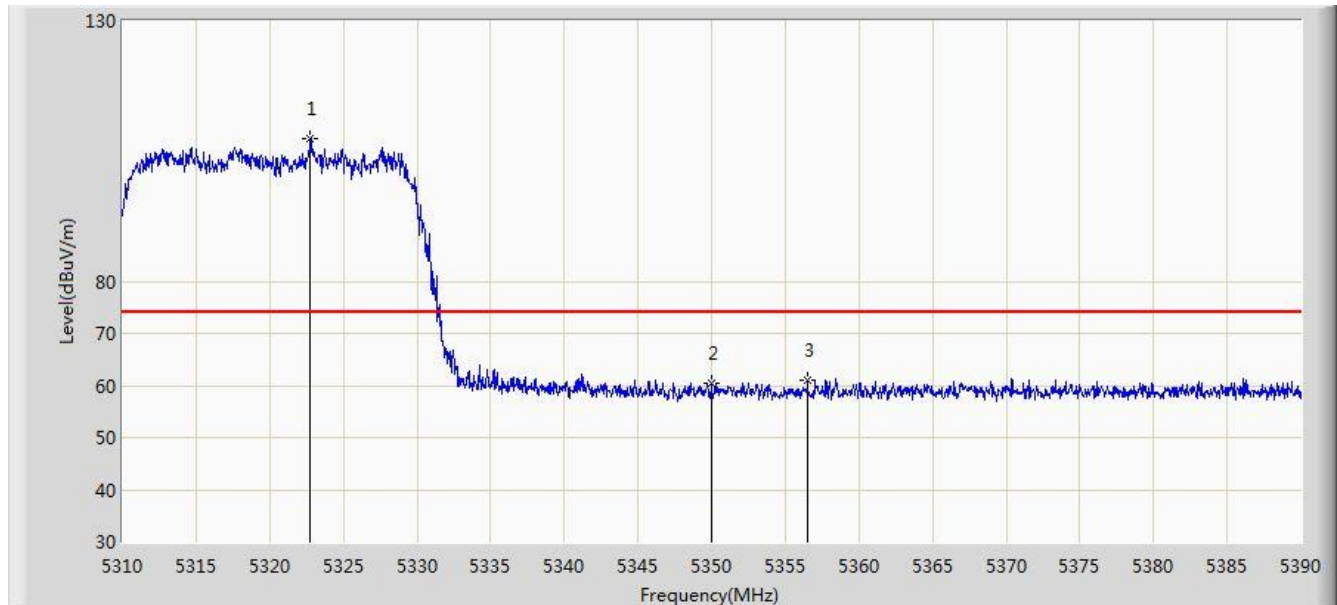


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.760	107.370	103.516	N/A	N/A	3.854	PK
2			5350.000	60.530	56.625	-13.470	74.000	3.904	PK
3			5356.520	61.091	57.174	-12.909	74.000	3.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/26 - 23:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz (CDD Mode)	

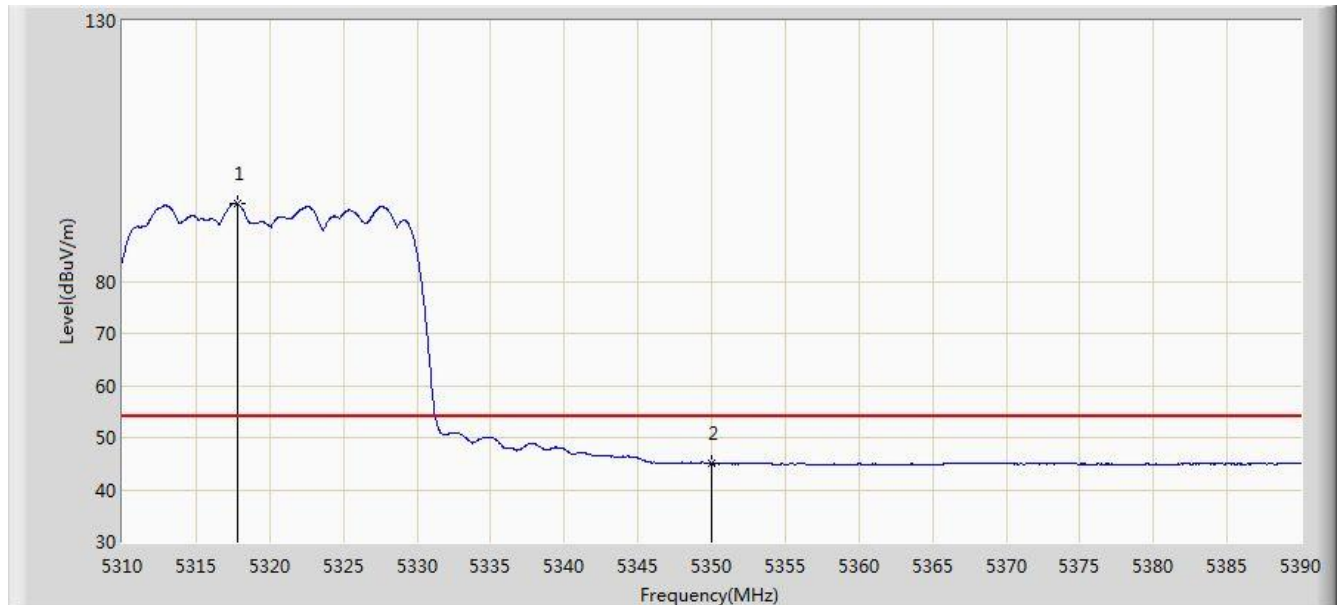


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.800	94.917	91.073	N/A	N/A	3.845	AV
2			5350.000	45.042	41.137	-8.958	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz (CDD Mode)	

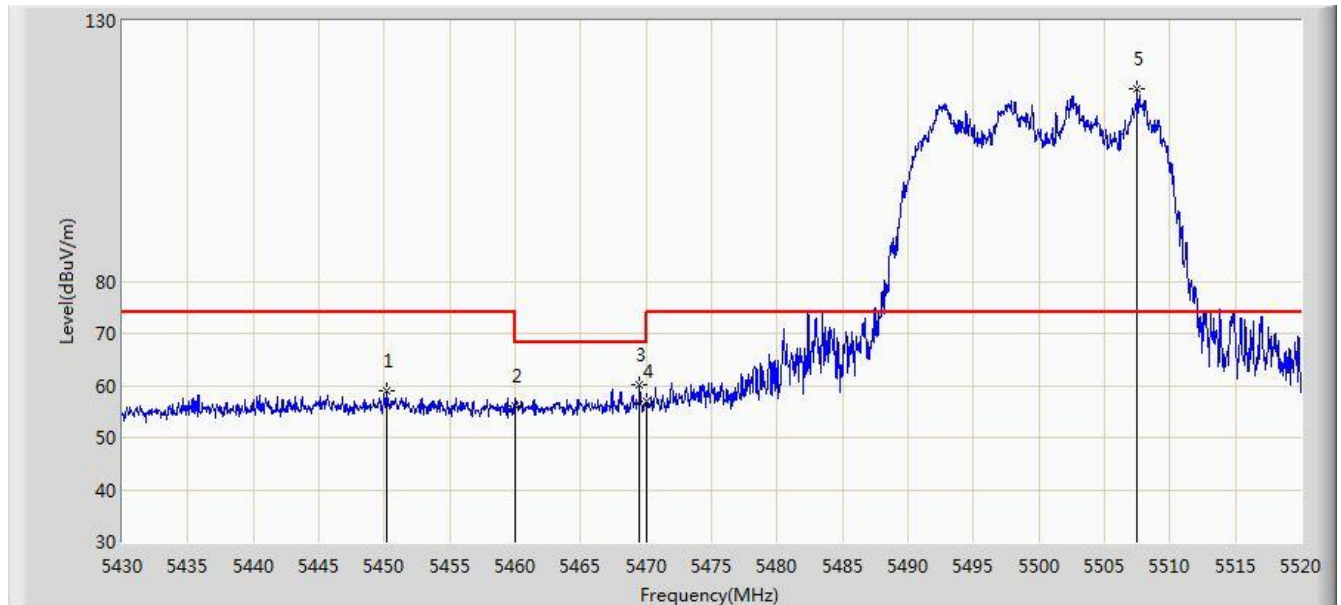


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.205	58.936	54.780	-15.064	74.000	4.155	PK
2			5460.000	56.062	51.882	-17.938	74.000	4.180	PK
3			5469.510	60.004	55.803	-8.196	68.200	4.202	PK
4			5470.000	56.838	52.636	-11.362	68.200	4.202	PK
5		*	5507.535	116.914	112.620	N/A	N/A	4.295	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz (CDD Mode)	

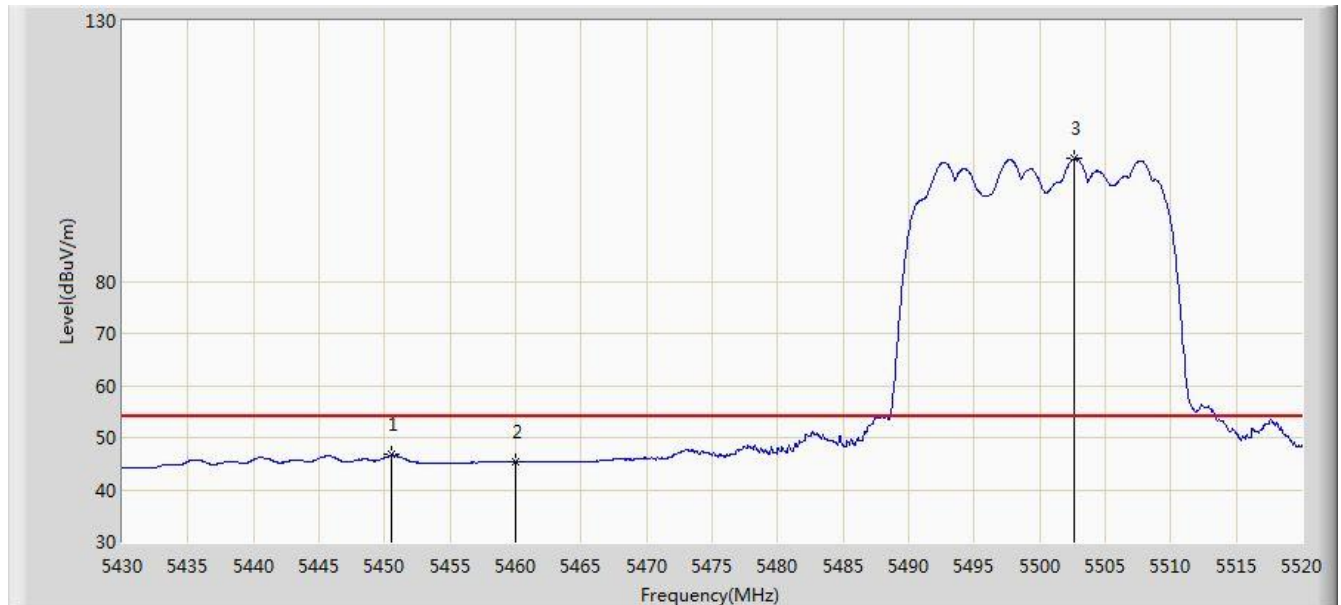


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.520	46.701	42.544	-7.299	54.000	4.157	AV
2			5460.000	45.304	41.124	-8.696	54.000	4.180	AV
3		*	5502.585	103.501	99.221	N/A	N/A	4.280	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz (CDD Mode)	

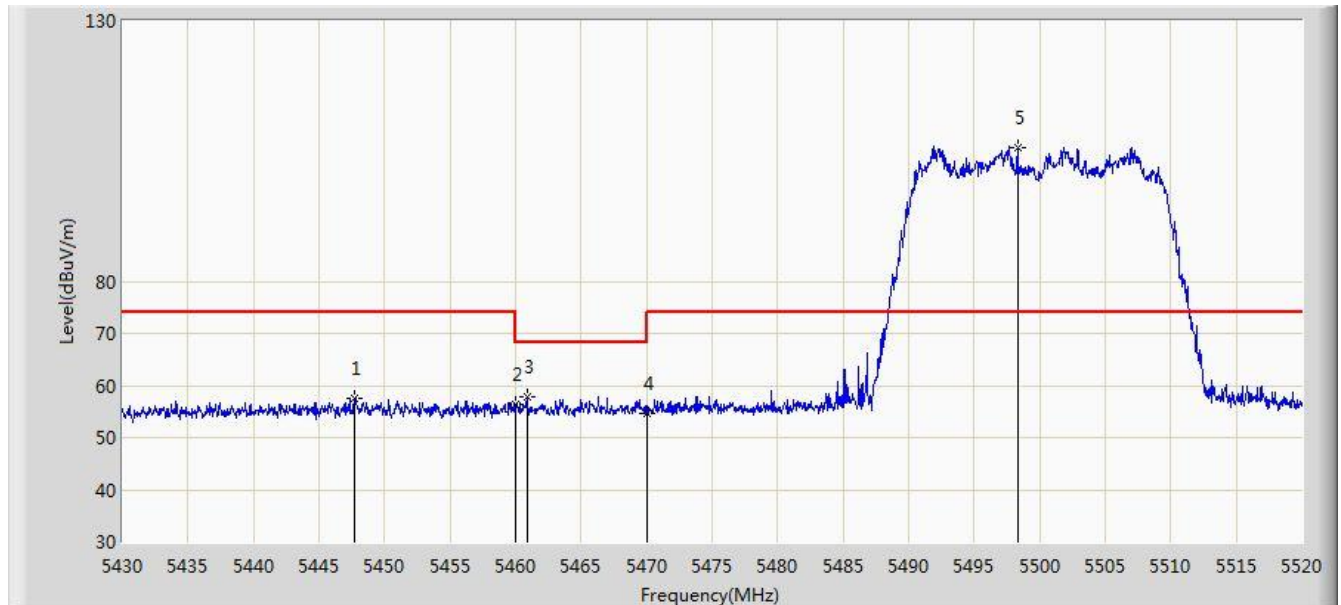


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.730	57.628	53.480	-16.372	74.000	4.148	PK
2			5460.000	56.379	52.199	-17.621	74.000	4.180	PK
3			5460.870	57.820	53.638	-10.380	68.200	4.183	PK
4			5470.000	54.682	50.480	-13.518	68.200	4.202	PK
5		*	5498.355	105.622	101.355	N/A	N/A	4.267	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 06:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz (CDD Mode)	

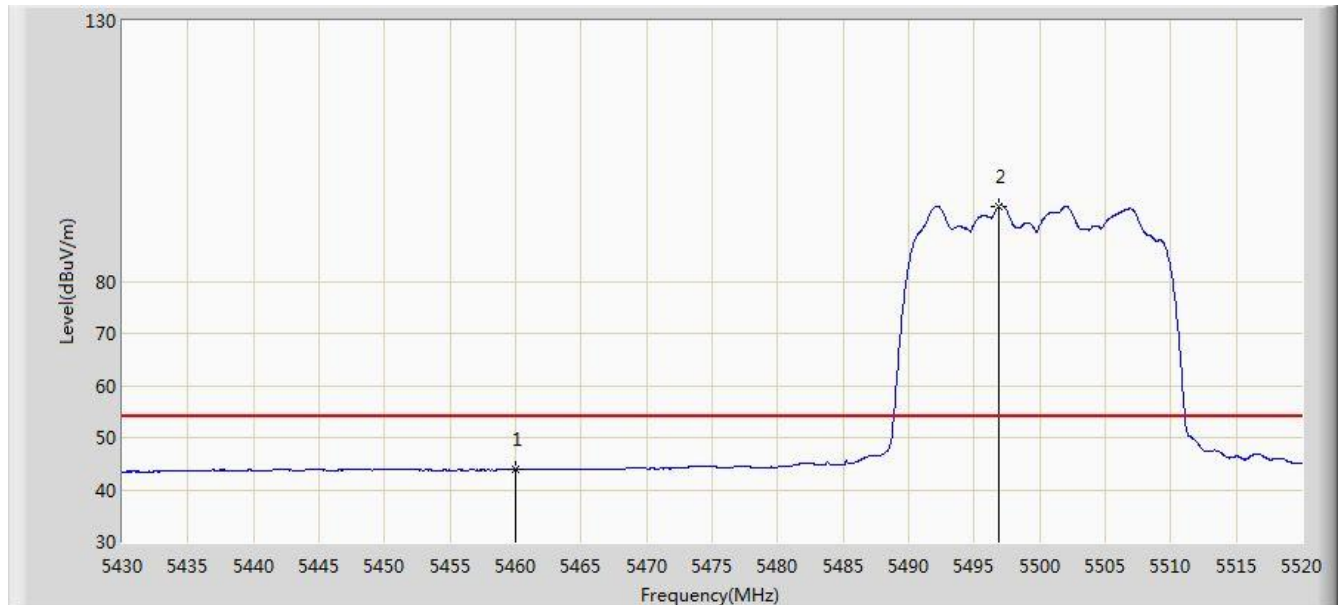


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	43.846	39.666	-10.154	54.000	4.180	AV
2		*	5496.915	94.479	90.216	N/A	N/A	4.264	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:58
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz (CDD Mode)	

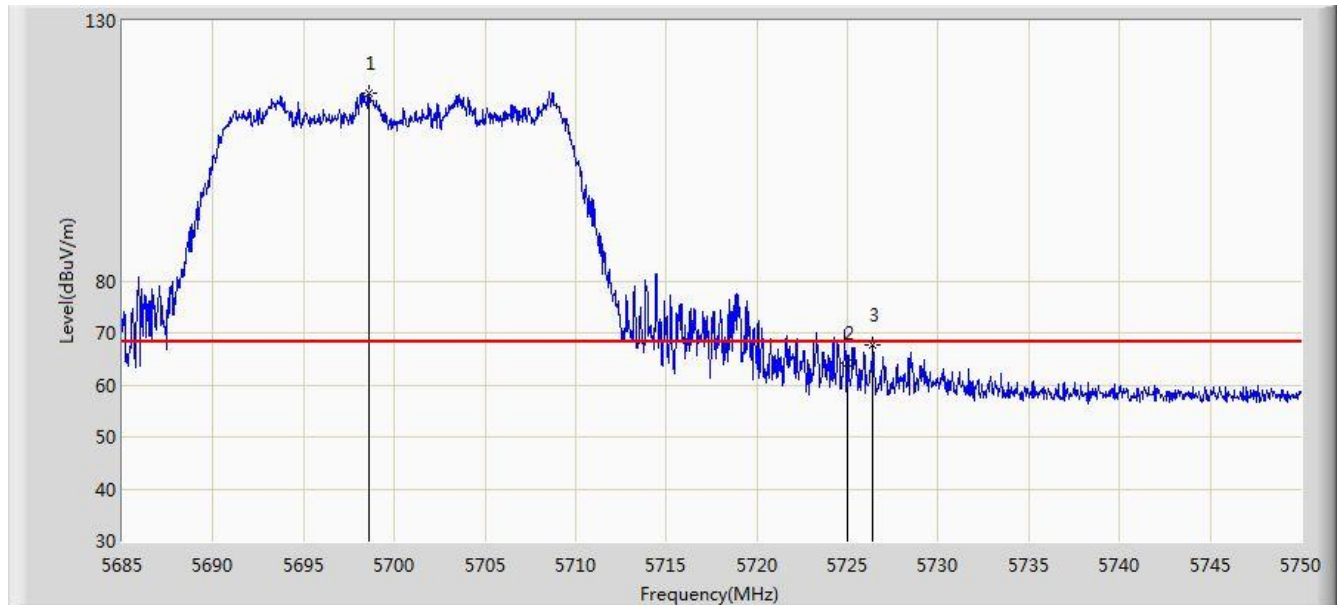


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.618	116.206	111.335	N/A	N/A	4.871	PK
2			5725.000	64.206	59.177	-3.994	68.200	5.029	PK
3			5726.405	67.539	62.501	-0.661	68.200	5.038	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 04:58
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz (CDD Mode)	

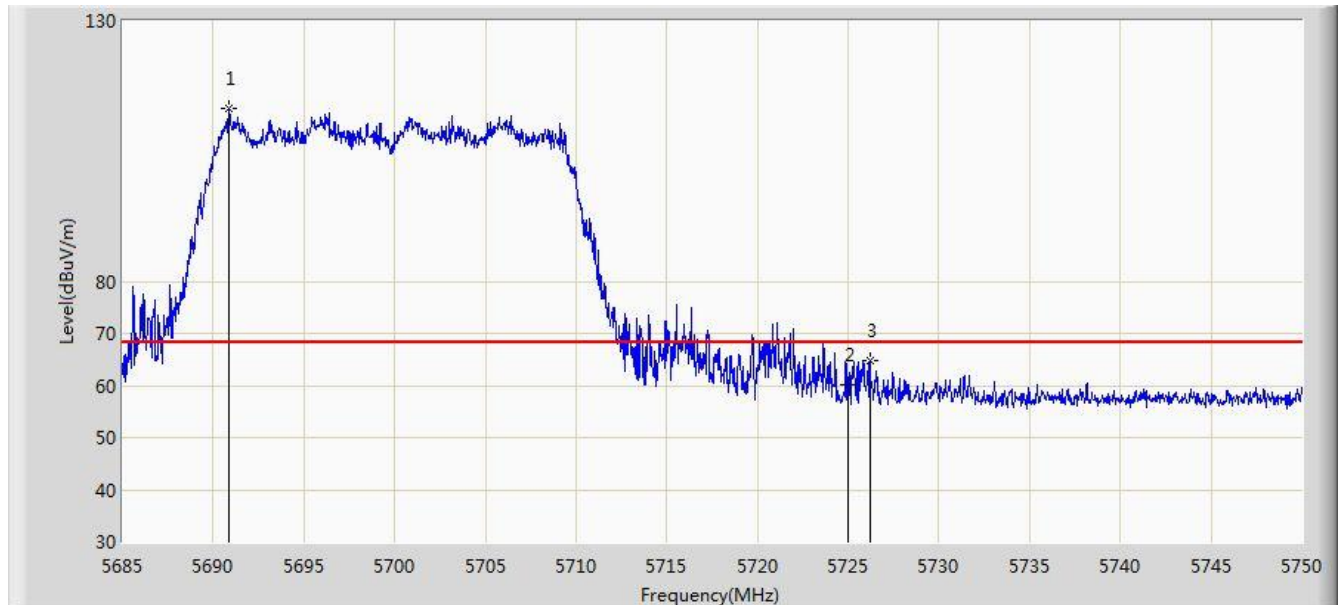


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5690.882	113.202	108.371	N/A	N/A	4.831	PK
2			5725.000	60.124	55.095	-8.076	68.200	5.029	PK
3			5726.178	64.705	59.668	-3.495	68.200	5.037	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:06
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode)	

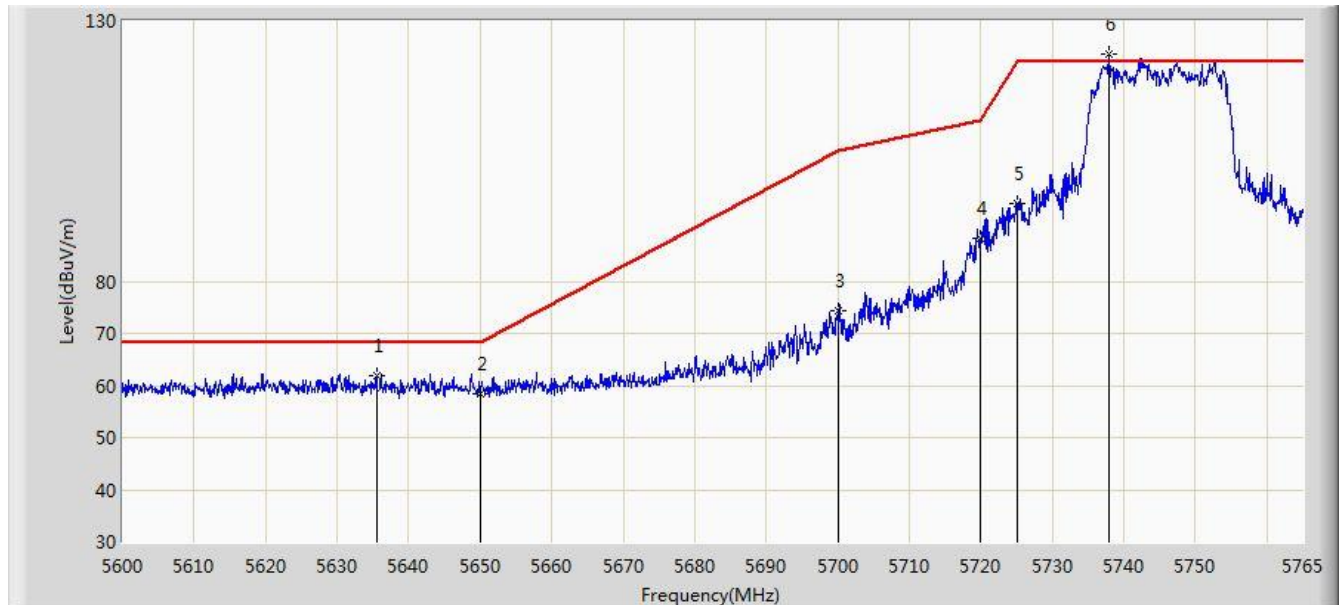


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.475	61.924	57.299	-6.276	68.200	4.624	PK
2			5650.000	58.447	53.776	-9.753	68.200	4.671	PK
3			5700.000	74.376	69.498	-30.824	105.200	4.878	PK
4			5720.000	88.379	83.382	-22.421	110.800	4.997	PK
5			5725.000	94.920	89.891	-27.280	122.200	5.029	PK
6		*	5737.857	123.707	118.596	N/A	N/A	5.112	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:09
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode)	

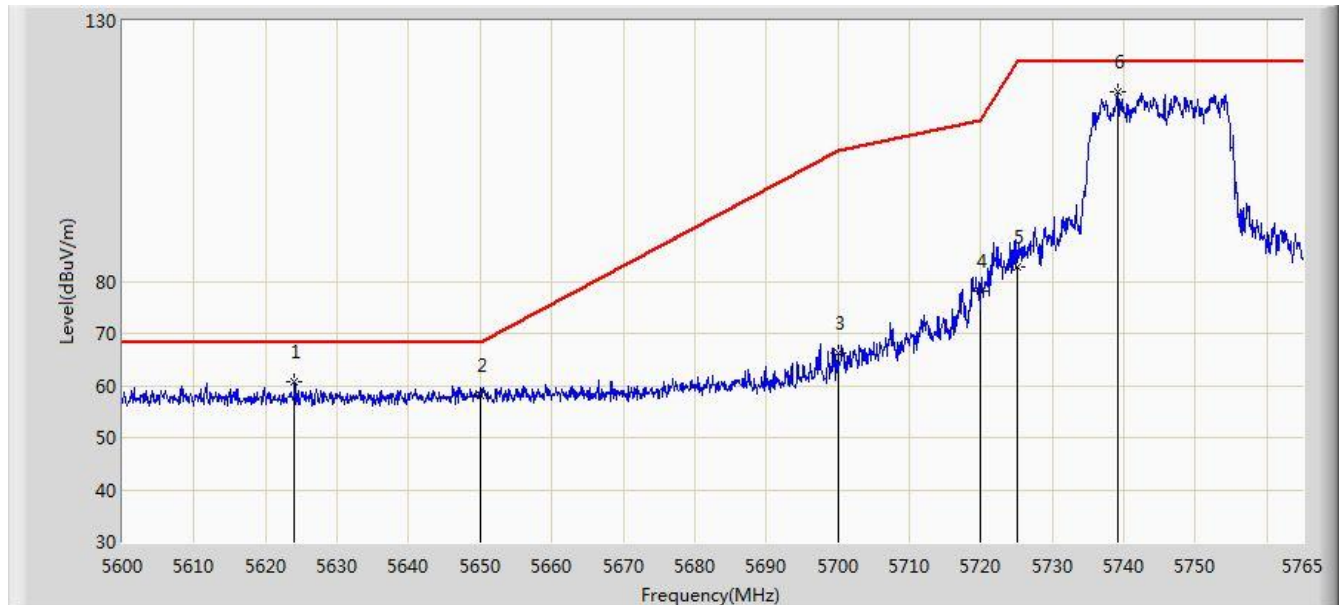


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5624.007	60.601	56.009	-7.599	68.200	4.592	PK
2			5650.000	58.130	53.459	-10.070	68.200	4.671	PK
3			5700.000	66.176	61.298	-39.024	105.200	4.878	PK
4			5720.000	78.029	73.032	-32.771	110.800	4.997	PK
5			5725.000	82.638	77.609	-39.562	122.200	5.029	PK
6		*	5739.178	116.516	111.397	N/A	N/A	5.120	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:11
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode)	

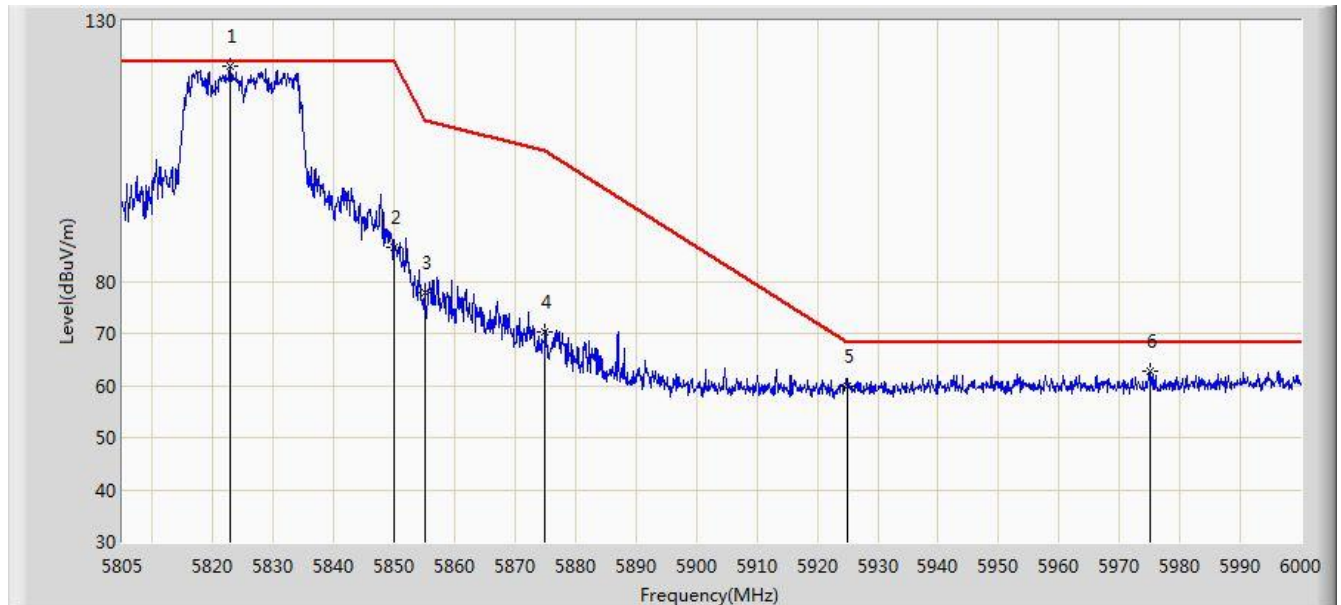


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.842	121.188	115.613	N/A	N/A	5.575	PK
2			5850.000	86.656	80.930	-35.544	122.200	5.726	PK
3			5855.000	77.854	72.108	-32.946	110.800	5.746	PK
4			5875.000	70.210	64.390	-34.990	105.200	5.820	PK
5			5925.000	59.763	53.797	-8.437	68.200	5.967	PK
6			5975.040	62.676	56.607	-5.524	68.200	6.069	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:14
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode)	

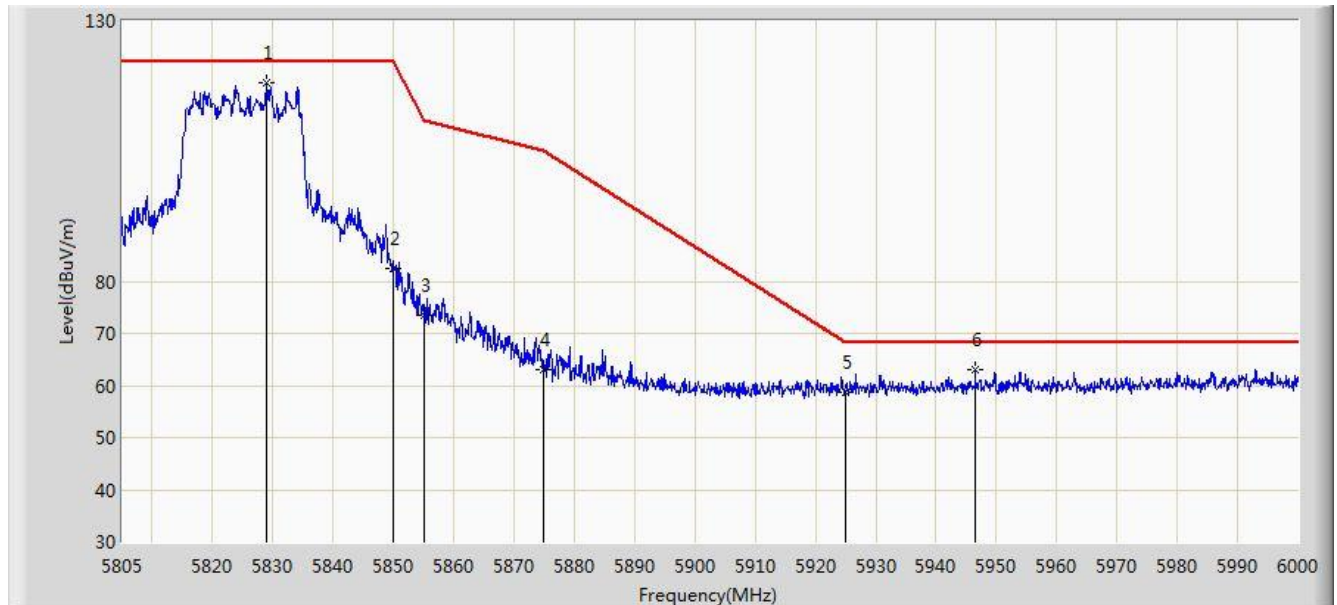


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.985	118.251	112.640	N/A	N/A	5.610	PK
2			5850.000	82.599	76.873	-39.601	122.200	5.726	PK
3			5855.000	73.342	67.596	-37.458	110.800	5.746	PK
4			5875.000	63.003	57.183	-42.197	105.200	5.820	PK
5			5925.000	58.746	52.780	-9.454	68.200	5.967	PK
6			5946.473	62.951	56.932	-5.249	68.200	6.019	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode)	

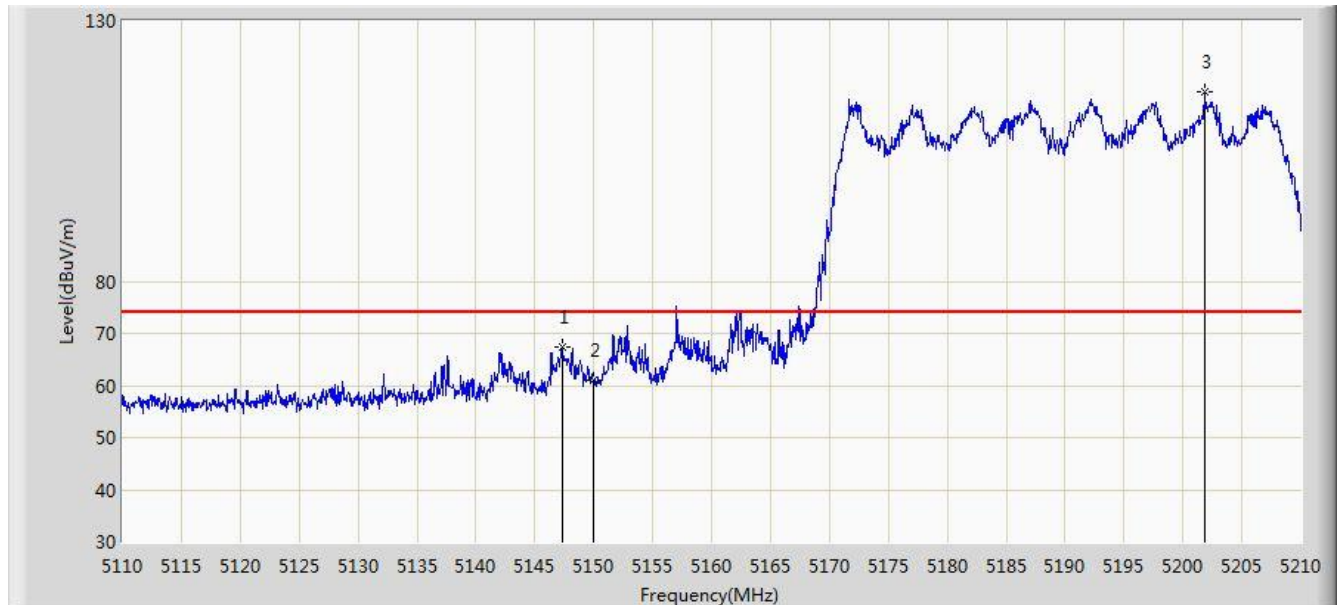


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.350	67.415	63.239	-6.585	74.000	4.175	PK
2			5150.000	61.134	56.965	-12.866	74.000	4.170	PK
3		*	5201.850	116.319	112.326	N/A	N/A	3.993	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode)	

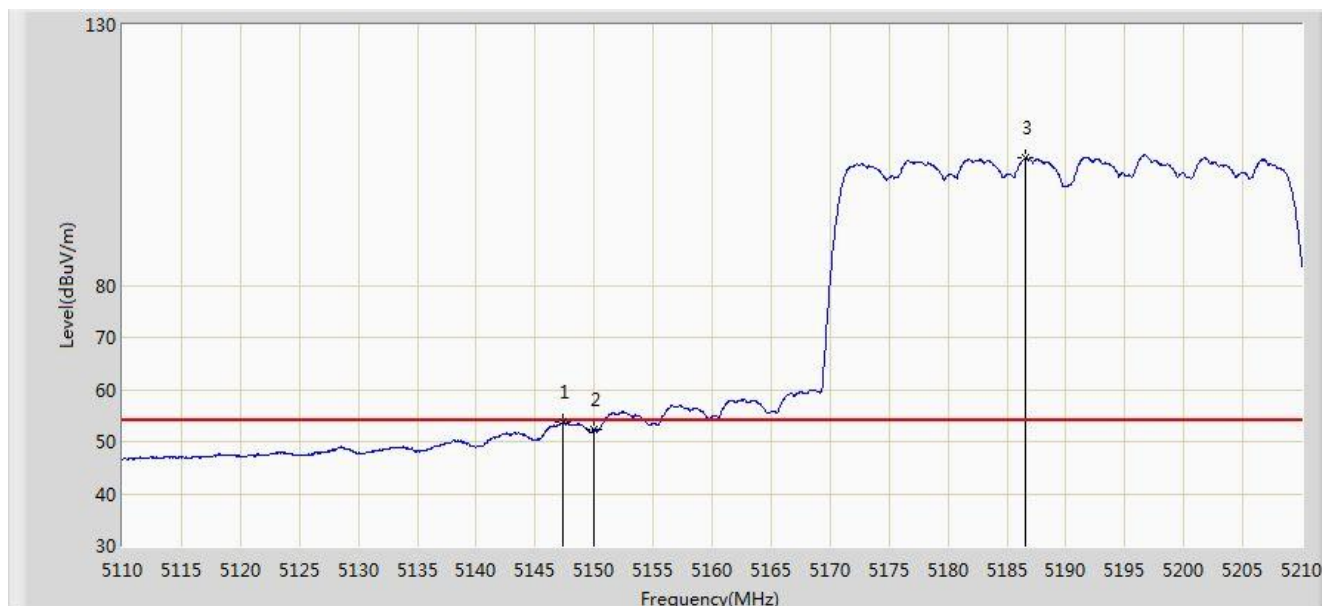


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.400	53.704	49.528	-0.296	54.000	4.175	AV
2			5150.000	52.214	48.045	-1.786	54.000	4.170	AV
3		*	5186.600	104.379	100.334	N/A	N/A	4.045	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode)	

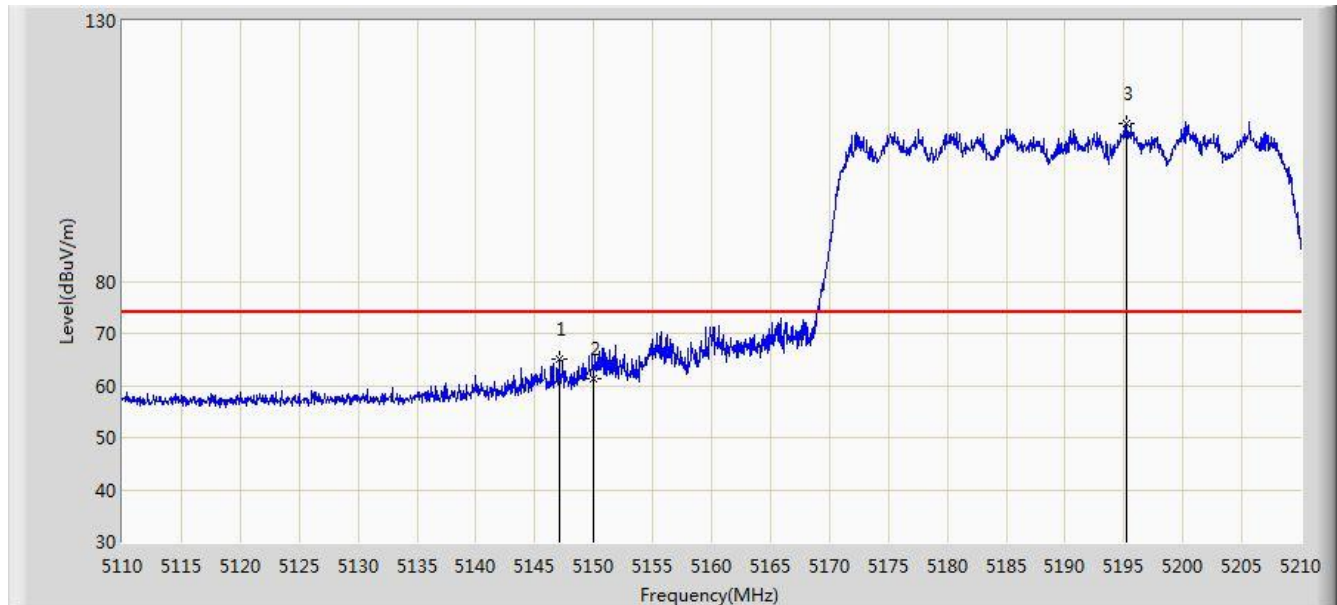


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.050	64.995	60.819	-9.005	74.000	4.176	PK
2			5150.000	61.217	57.048	-12.783	74.000	4.170	PK
3		*	5195.250	110.416	106.401	N/A	N/A	4.015	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode)	

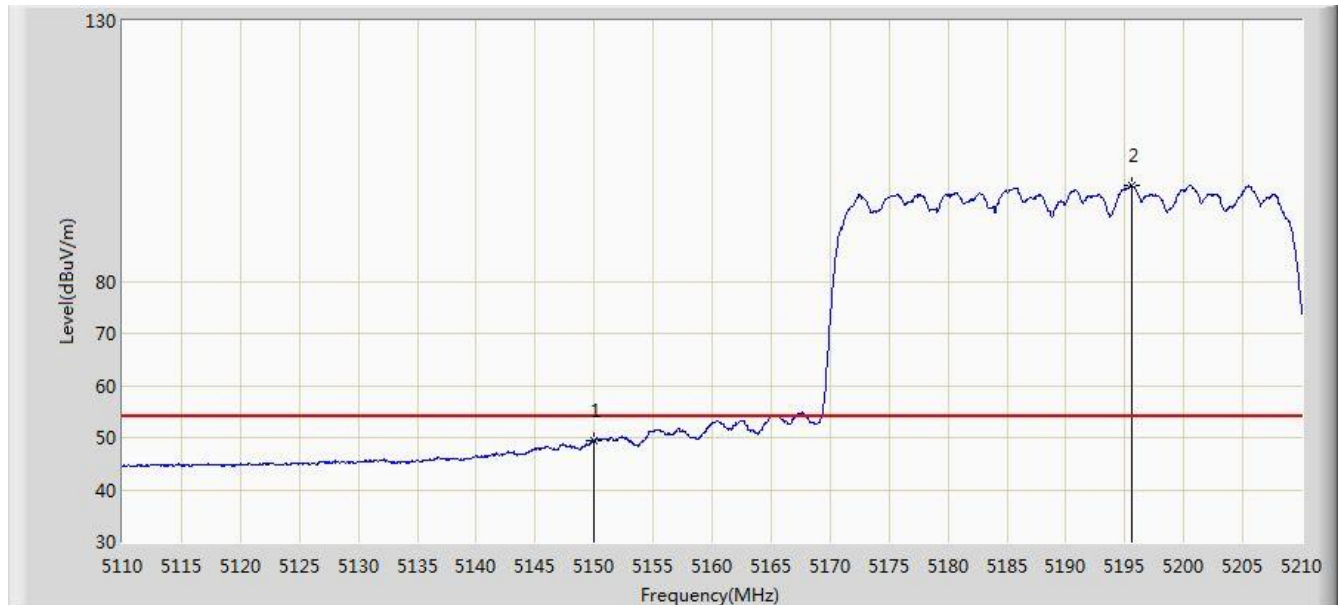


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.393	45.224	-4.607	54.000	4.170	AV
2		*	5195.550	98.515	94.501	N/A	N/A	4.014	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5230MHz (CDD Mode)	

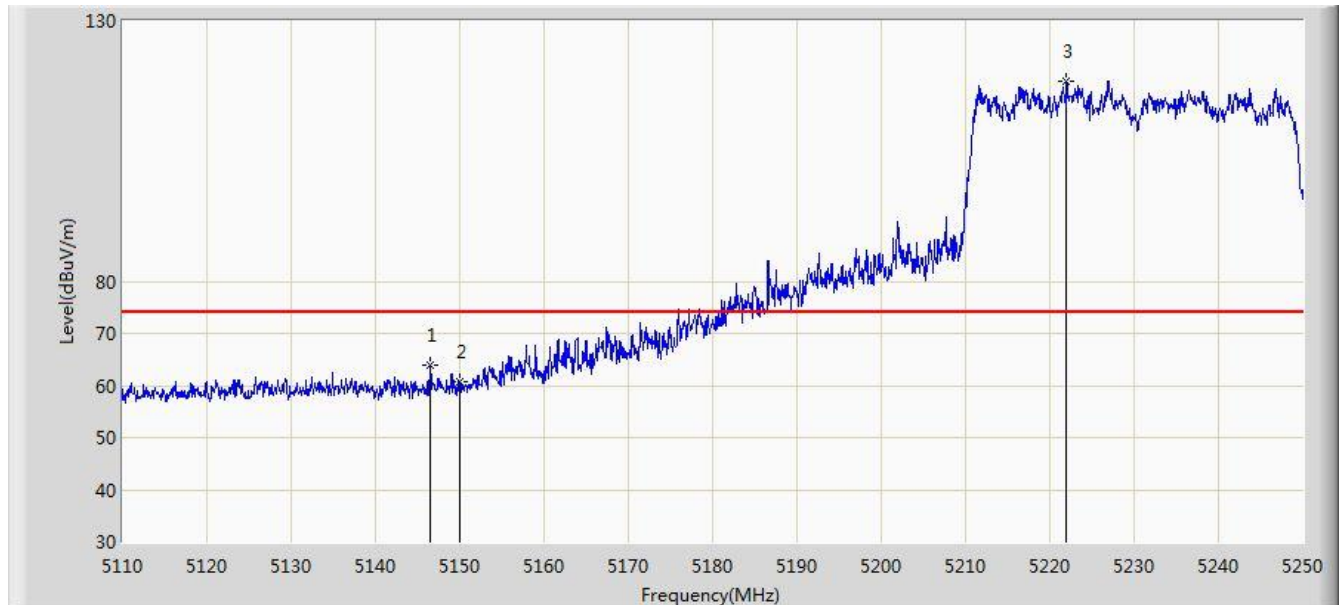


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.540	64.016	59.840	-9.984	74.000	4.176	PK
2			5150.000	60.627	56.458	-13.373	74.000	4.170	PK
3		*	5222.000	118.281	114.348	N/A	N/A	3.933	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 11:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5230MHz (CDD Mode)	

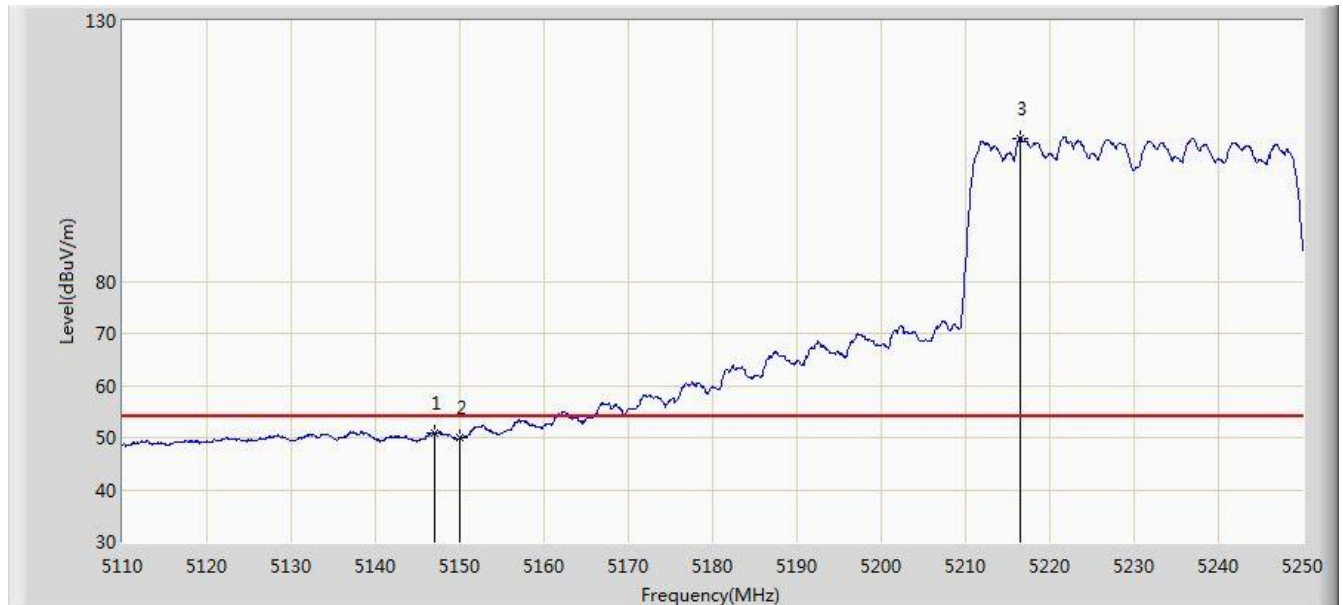


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.960	50.999	46.823	-3.001	54.000	4.176	AV
2			5150.000	49.897	45.728	-4.103	54.000	4.170	AV
3		*	5216.470	107.495	103.546	N/A	N/A	3.950	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5230MHz (CDD Mode)	

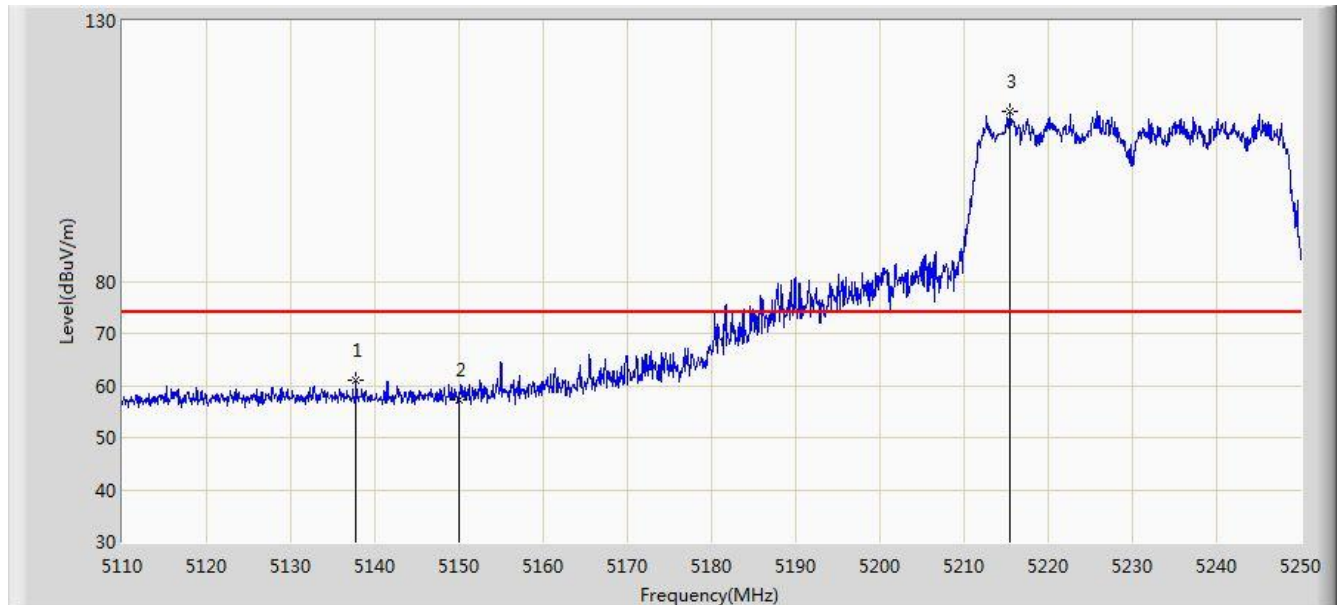


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.720	60.919	56.744	-13.081	74.000	4.175	PK
2			5150.000	57.273	53.104	-16.727	74.000	4.170	PK
3		*	5215.420	112.583	108.630	N/A	N/A	3.953	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5230MHz (CDD Mode)	

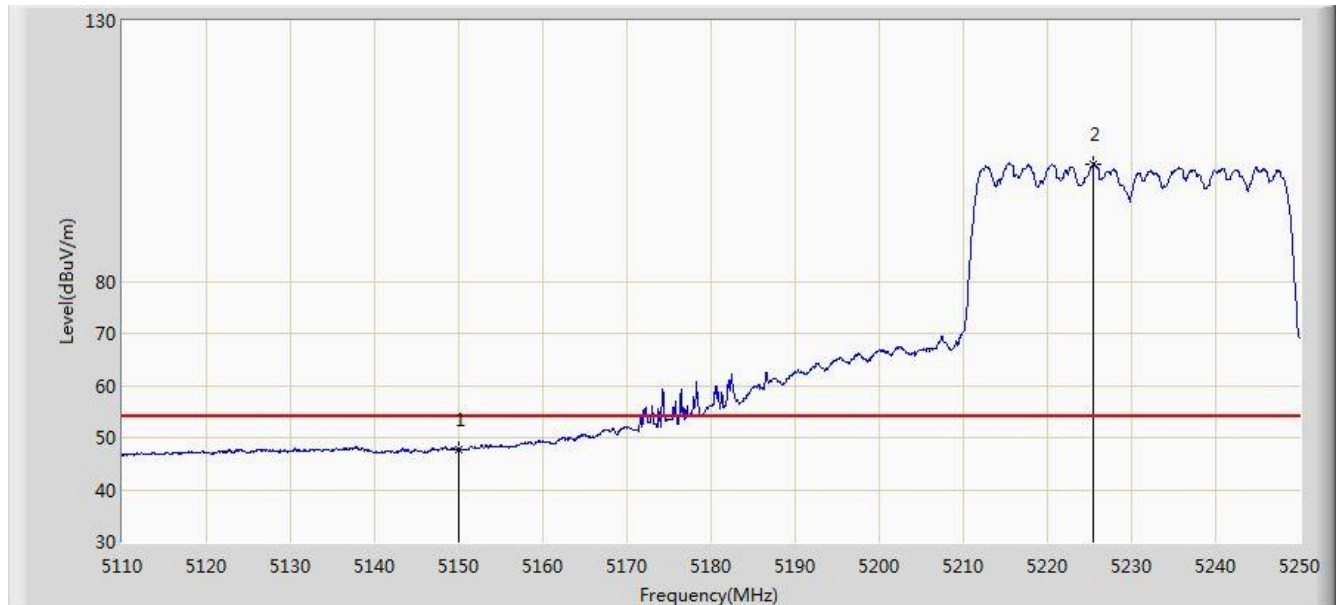


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.794	43.625	-6.206	54.000	4.170	AV
2		*	5225.430	102.593	98.670	N/A	N/A	3.924	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz (CDD Mode)	

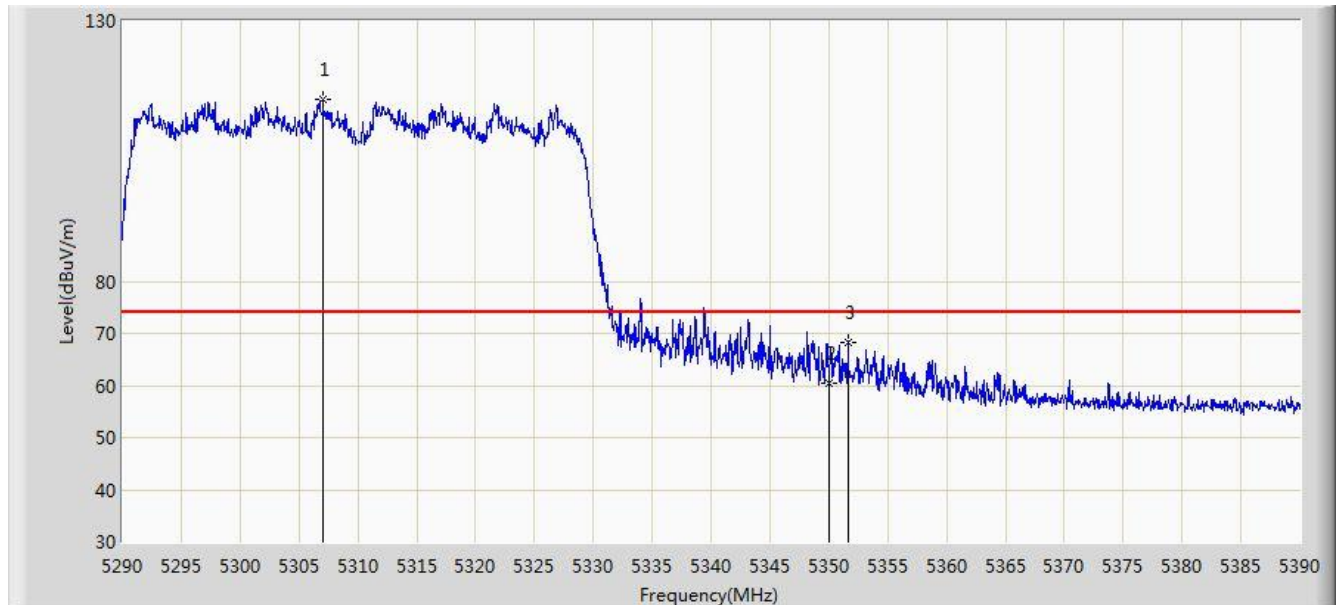


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.050	114.798	110.973	N/A	N/A	3.825	PK
2			5350.000	60.521	56.616	-13.479	74.000	3.904	PK
3			5351.600	68.380	64.472	-5.620	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz (CDD Mode)	

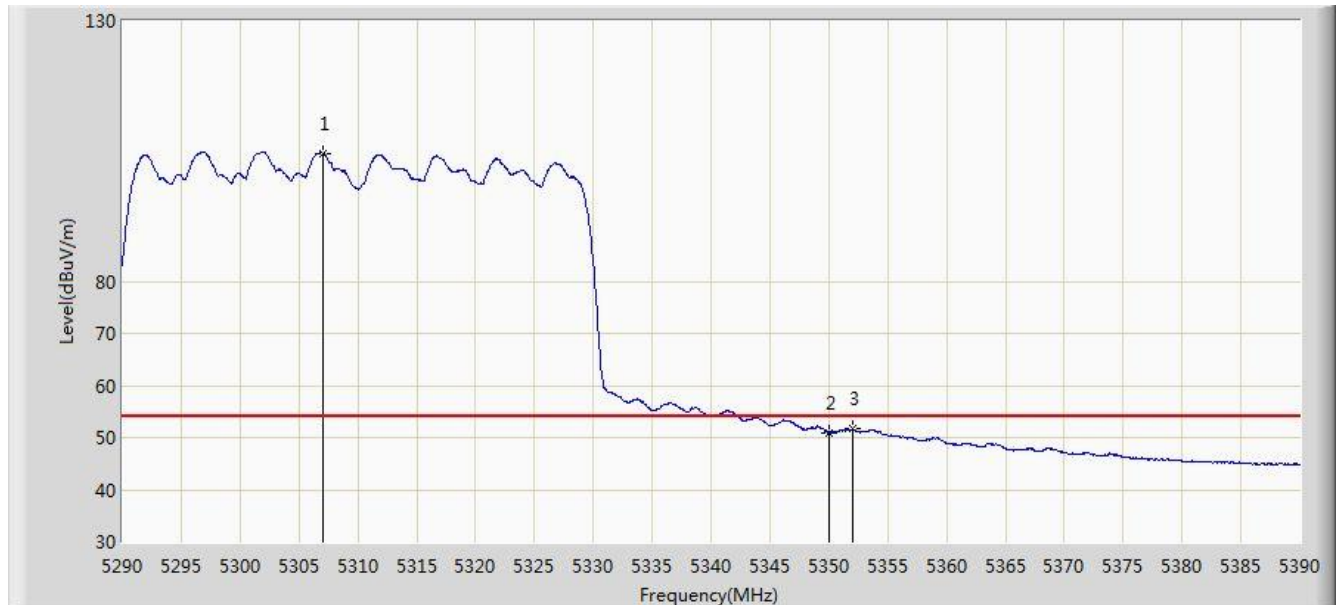


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.050	104.590	100.765	N/A	N/A	3.825	AV
2			5350.000	50.977	47.072	-3.023	54.000	3.904	AV
3			5352.000	51.694	47.786	-2.306	54.000	3.908	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz (CDD Mode)	

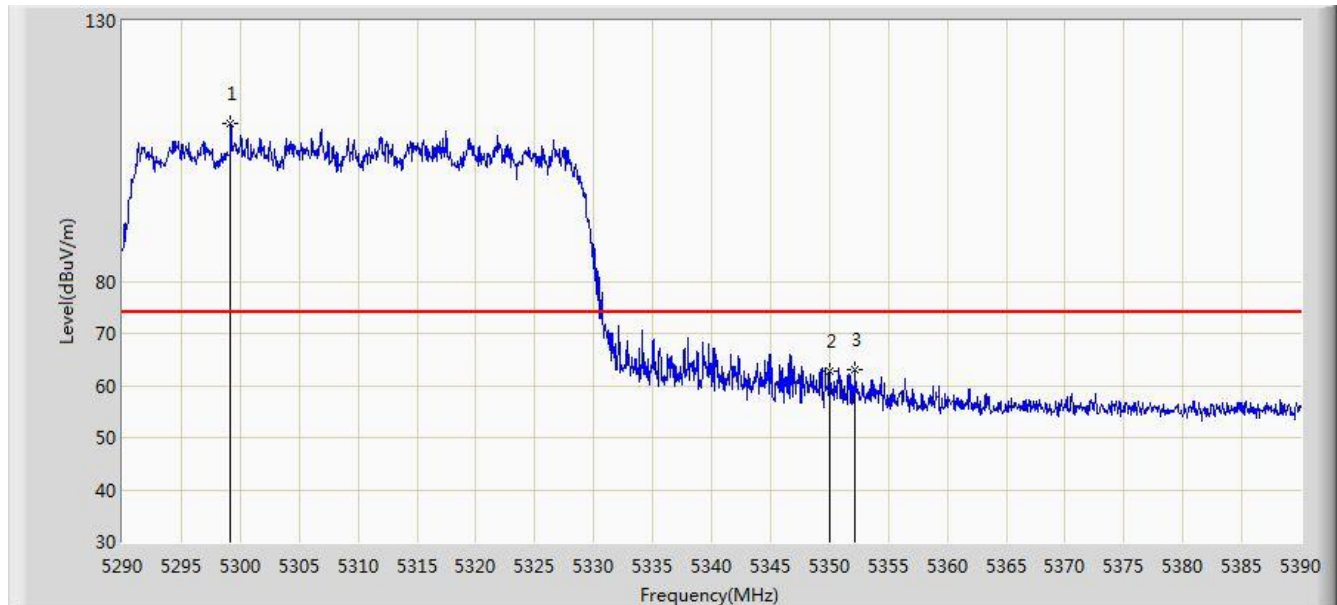


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.200	110.159	106.345	N/A	N/A	3.814	PK
2			5350.000	62.616	58.711	-11.384	74.000	3.904	PK
3			5352.150	63.155	59.246	-10.845	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz (CDD Mode)	

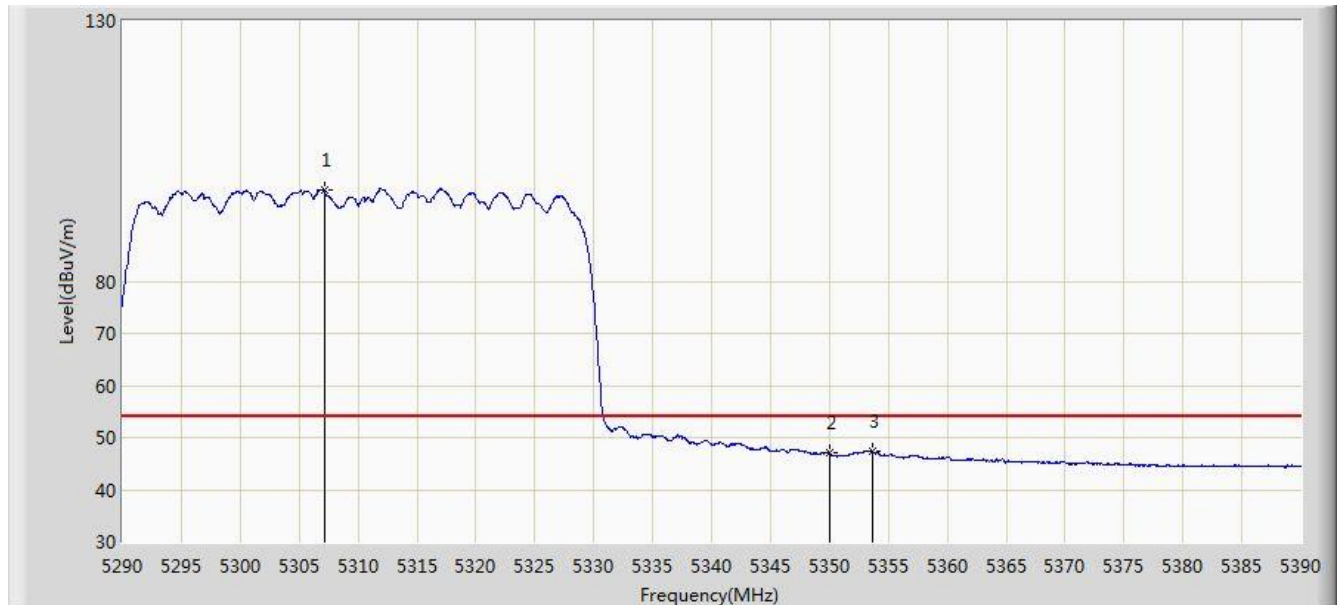


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.200	97.562	93.737	N/A	N/A	3.825	AV
2			5350.000	47.065	43.160	-6.935	54.000	3.904	AV
3			5353.700	47.273	43.362	-6.727	54.000	3.911	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz (CDD Mode)	

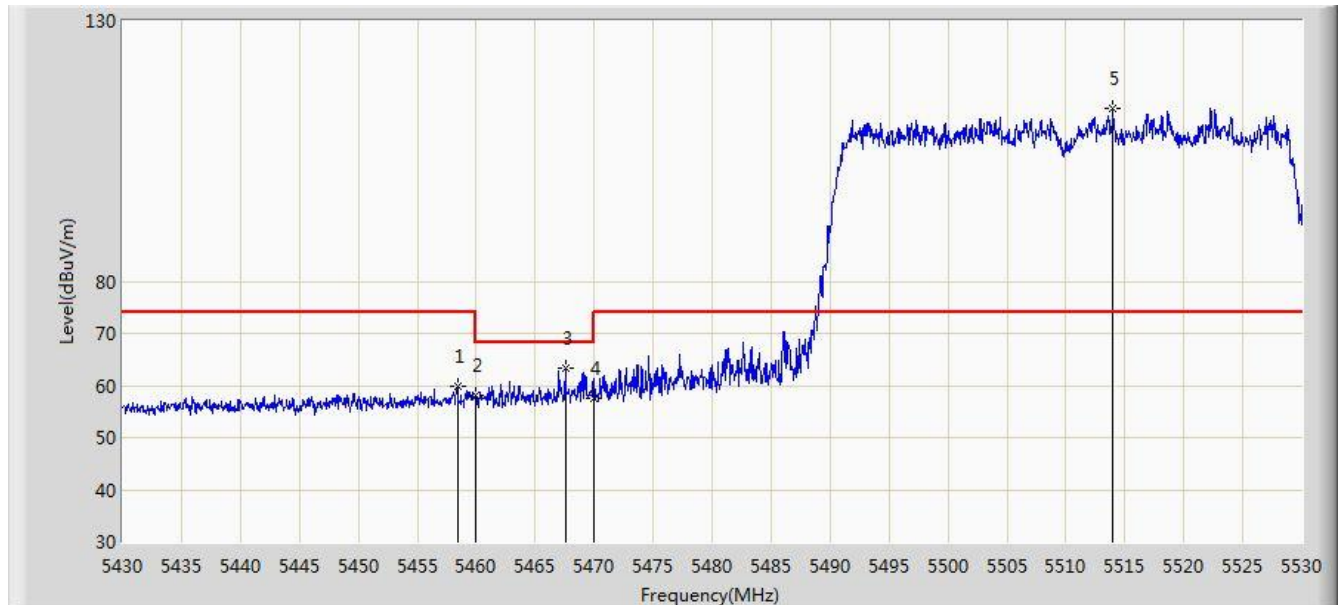


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.400	59.741	55.564	-14.259	74.000	4.177	PK
2			5460.000	58.105	53.925	-15.895	74.000	4.180	PK
3			5467.600	63.463	59.266	-4.737	68.200	4.197	PK
4			5470.000	57.585	53.383	-10.615	68.200	4.202	PK
5		*	5513.950	113.100	108.787	N/A	N/A	4.313	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz (CDD Mode)	

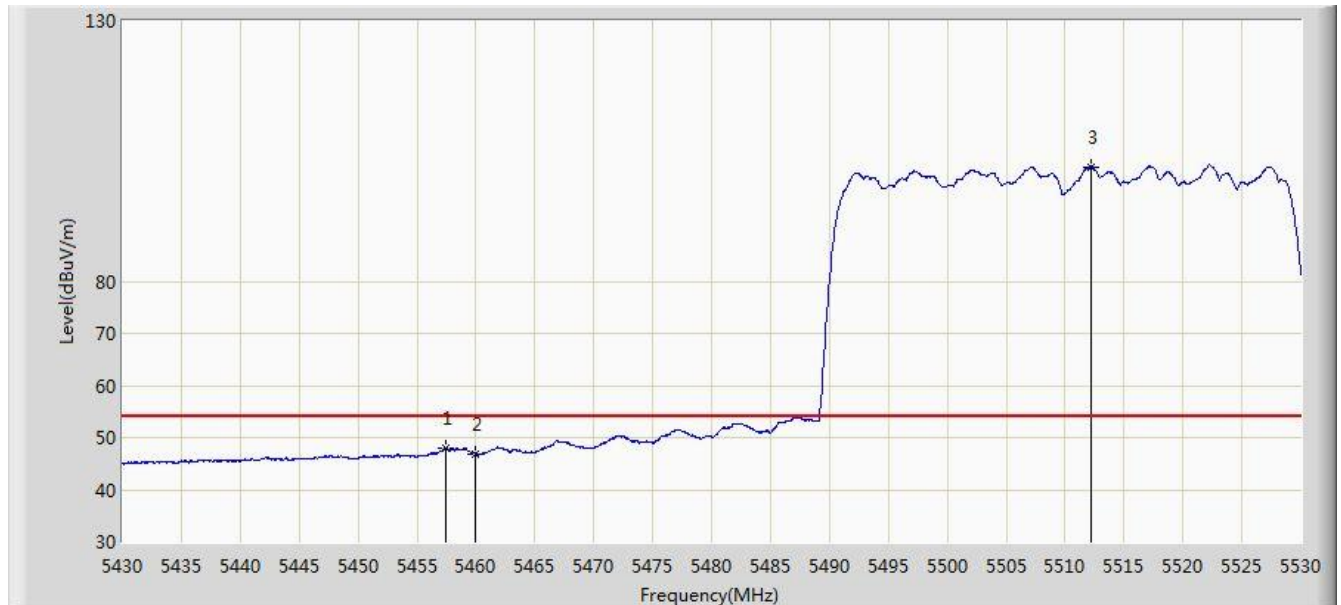


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.500	47.998	43.823	-6.002	54.000	4.175	AV
2			5460.000	46.941	42.761	-7.059	54.000	4.180	AV
3		*	5512.200	101.982	97.674	N/A	N/A	4.307	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz (CDD Mode)	

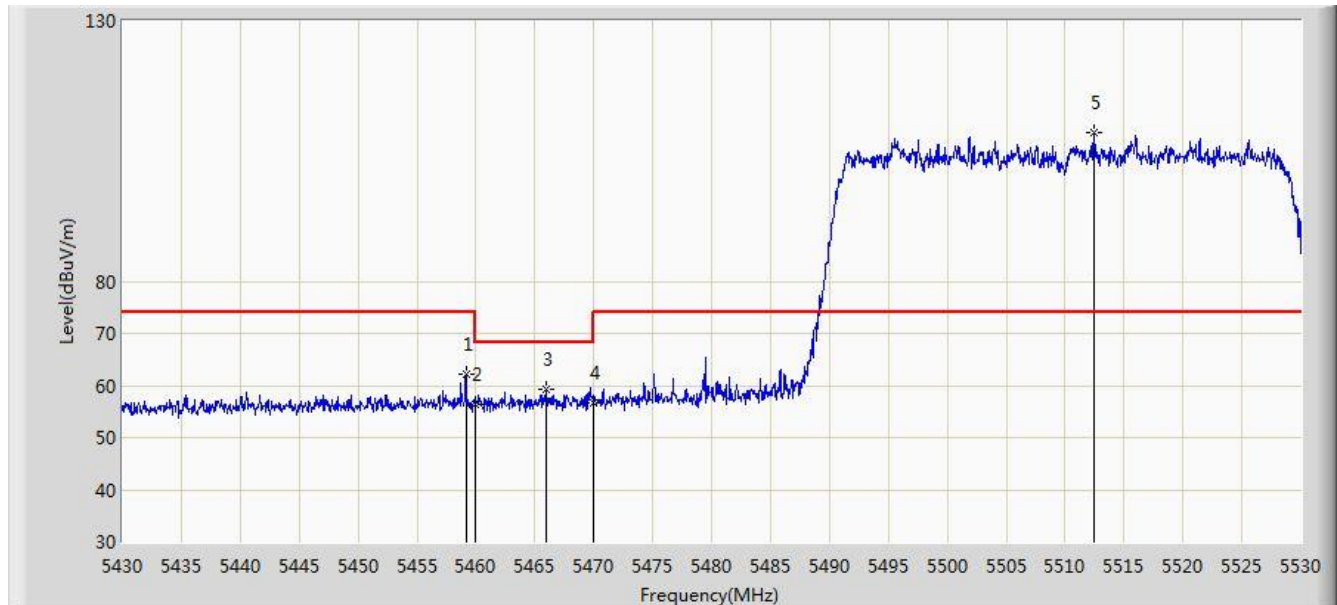


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.150	62.035	57.857	-11.965	74.000	4.178	PK
2			5460.000	56.243	52.063	-17.757	74.000	4.180	PK
3			5465.950	59.330	55.137	-8.870	68.200	4.193	PK
4			5470.000	56.642	52.440	-11.558	68.200	4.202	PK
5		*	5512.450	108.607	104.299	N/A	N/A	4.308	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz (CDD Mode)	

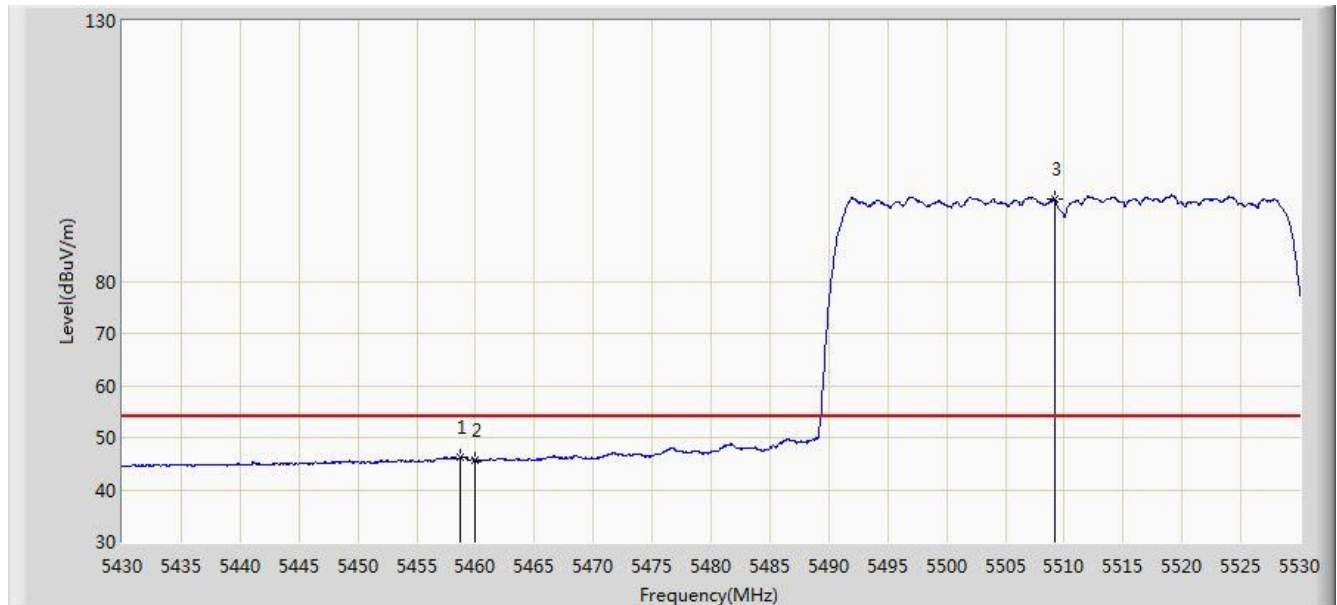


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.700	46.363	42.185	-7.637	54.000	4.178	AV
2			5460.000	45.570	41.390	-8.430	54.000	4.180	AV
3		*	5509.250	95.778	91.479	N/A	N/A	4.299	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5590MHz (CDD Mode)	

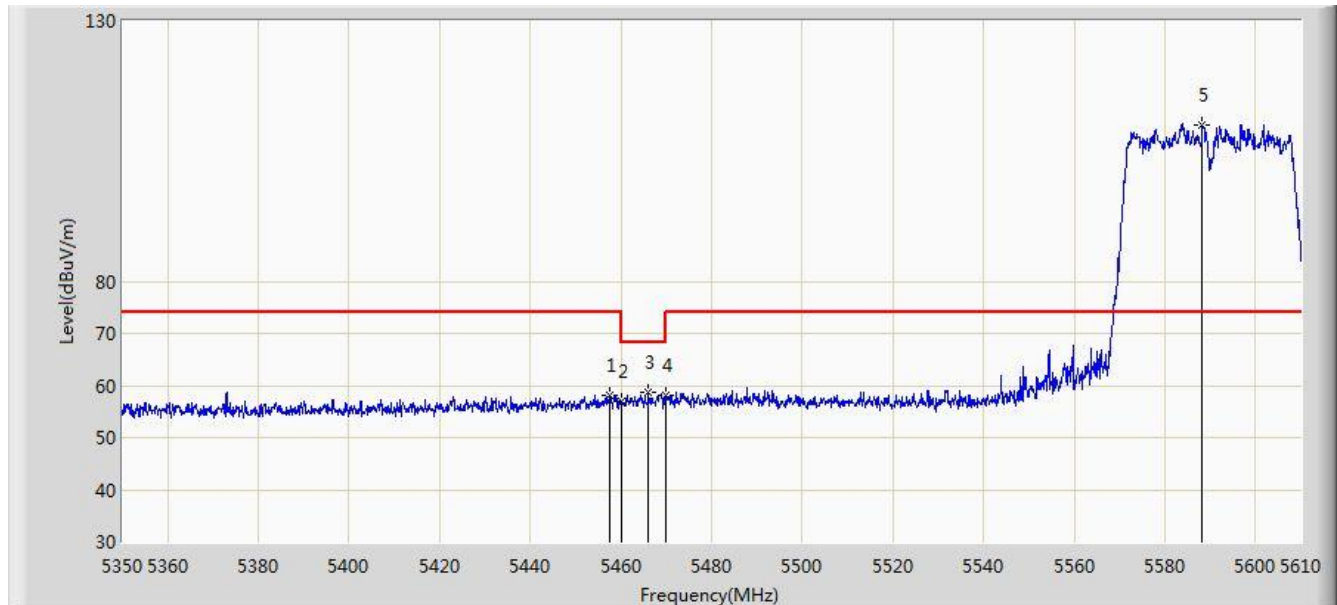


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.640	58.214	54.039	-15.786	74.000	4.176	PK
2			5460.000	57.034	52.854	-16.966	74.000	4.180	PK
3			5466.090	58.668	54.474	-9.532	68.200	4.193	PK
4			5470.000	58.019	53.817	-10.181	68.200	4.202	PK
5		*	5588.290	110.031	105.531	N/A	N/A	4.499	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5590MHz (CDD Mode)	

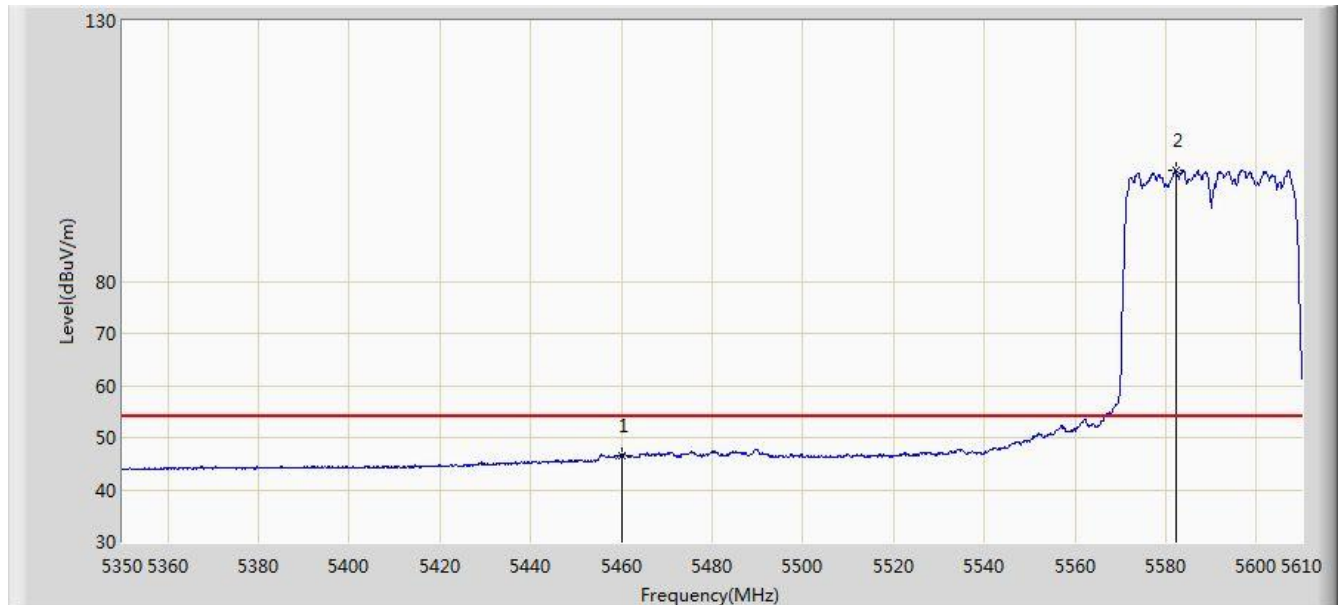


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.477	42.297	-7.523	54.000	4.180	AV
2		*	5582.310	101.290	96.803	N/A	N/A	4.487	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)


Site: AC1	Time: 2018/11/30 - 14:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5590MHz (CDD Mode)	

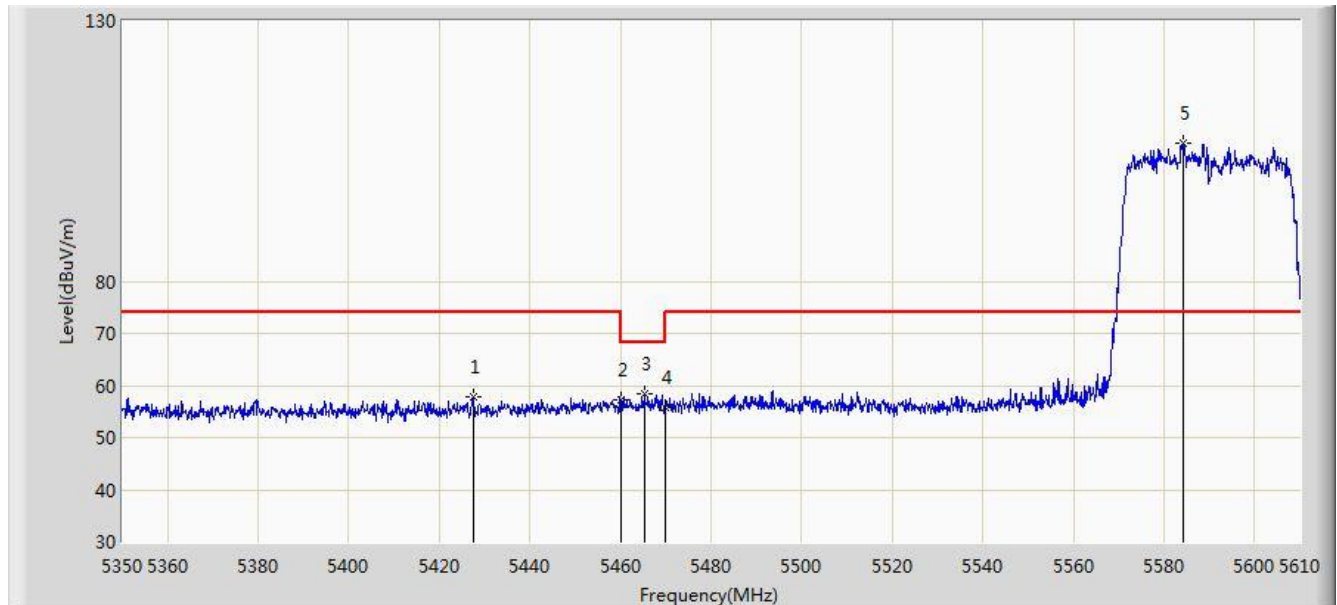

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5590MHz (CDD Mode)	

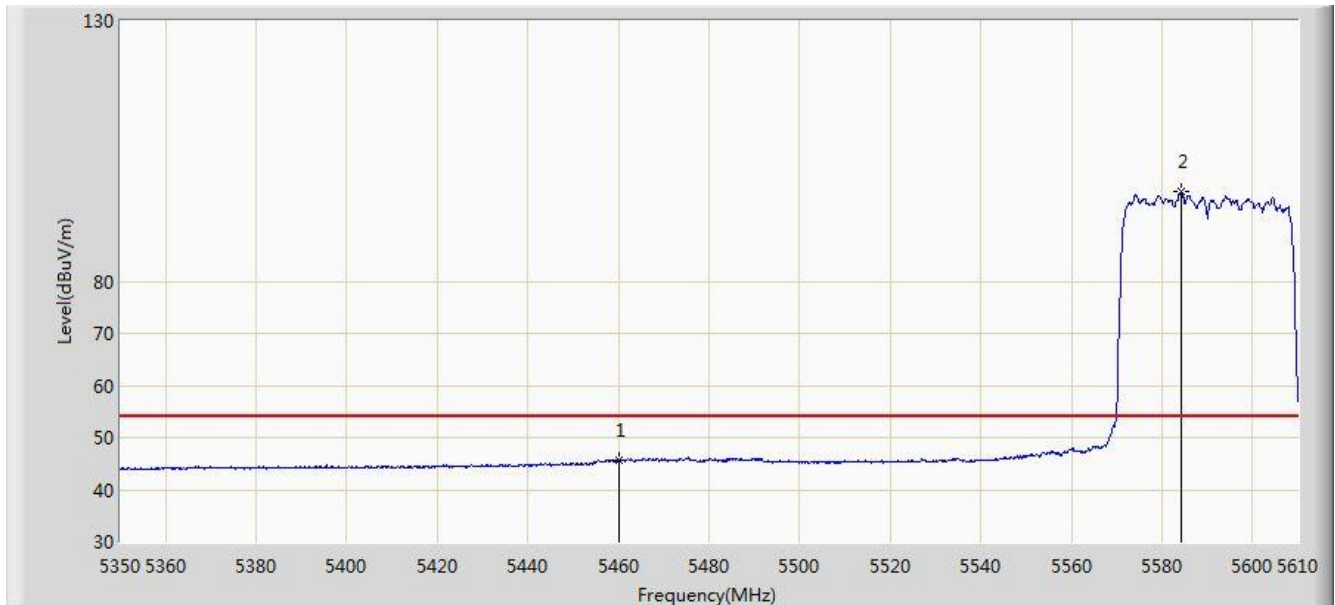

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.783	41.603	-8.217	54.000	4.180	AV
2		*	5584.390	97.268	92.776	N/A	N/A	4.492	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 05:03
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.500	113.511	108.790	N/A	N/A	4.722	PK
2			5725.000	61.043	56.014	-7.157	68.200	5.029	PK
3			5726.600	67.126	62.087	-1.074	68.200	5.039	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 05:04
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz (CDD Mode)	

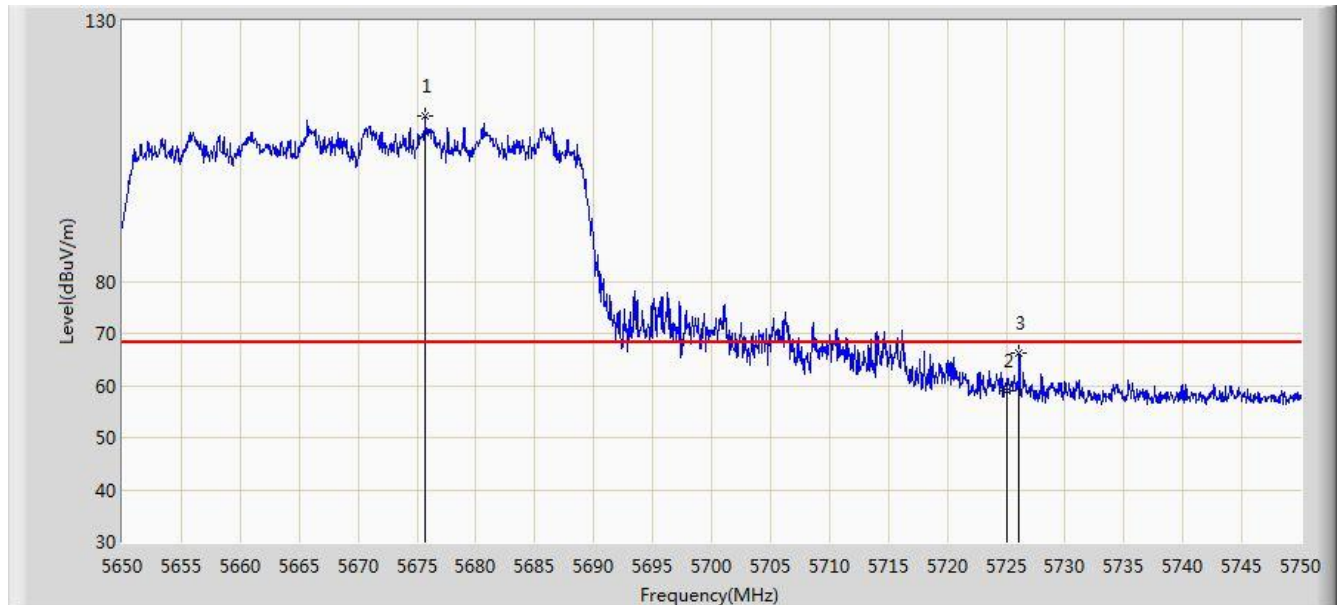


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5675.700	111.665	106.895	N/A	N/A	4.770	PK
2			5725.000	59.105	54.076	-9.095	68.200	5.029	PK
3			5726.100	66.211	61.175	-1.989	68.200	5.036	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:40
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode)	

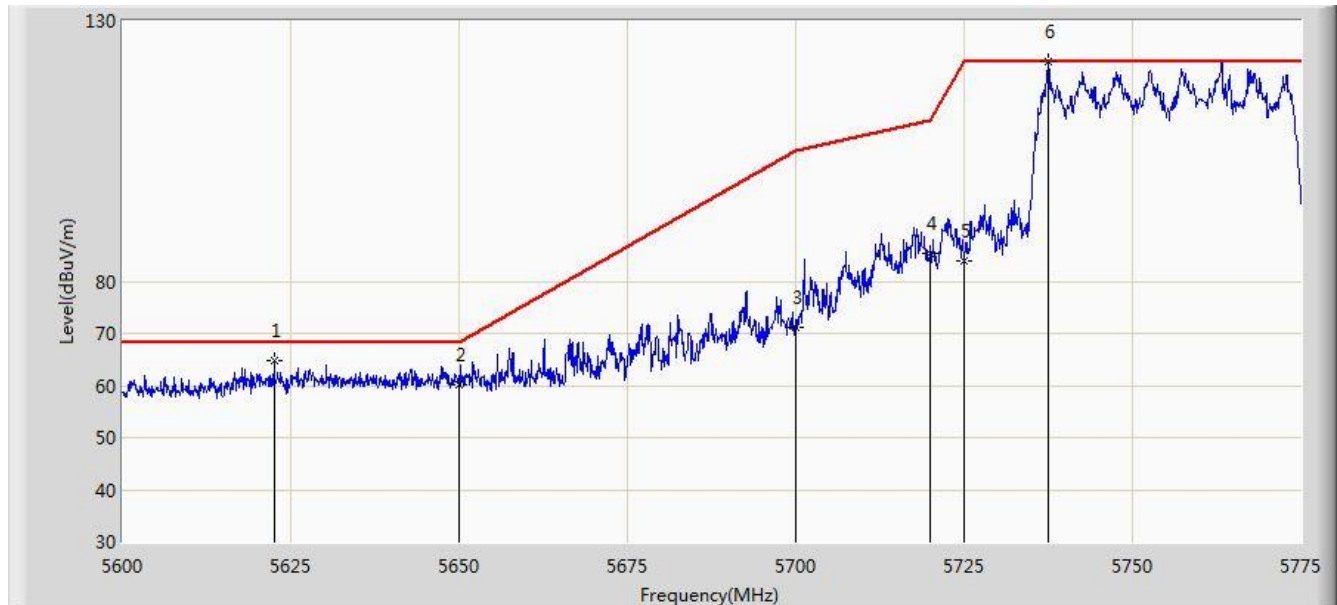


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5622.575	64.885	60.297	-3.315	68.200	4.589	PK
2			5650.000	60.247	55.576	-7.953	68.200	4.671	PK
3			5700.000	71.181	66.303	-34.019	105.200	4.878	PK
4			5720.000	85.220	80.223	-25.580	110.800	4.997	PK
5			5725.000	83.884	78.855	-38.316	122.200	5.029	PK
6		*	5737.550	122.238	117.129	N/A	N/A	5.108	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:44
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode)	

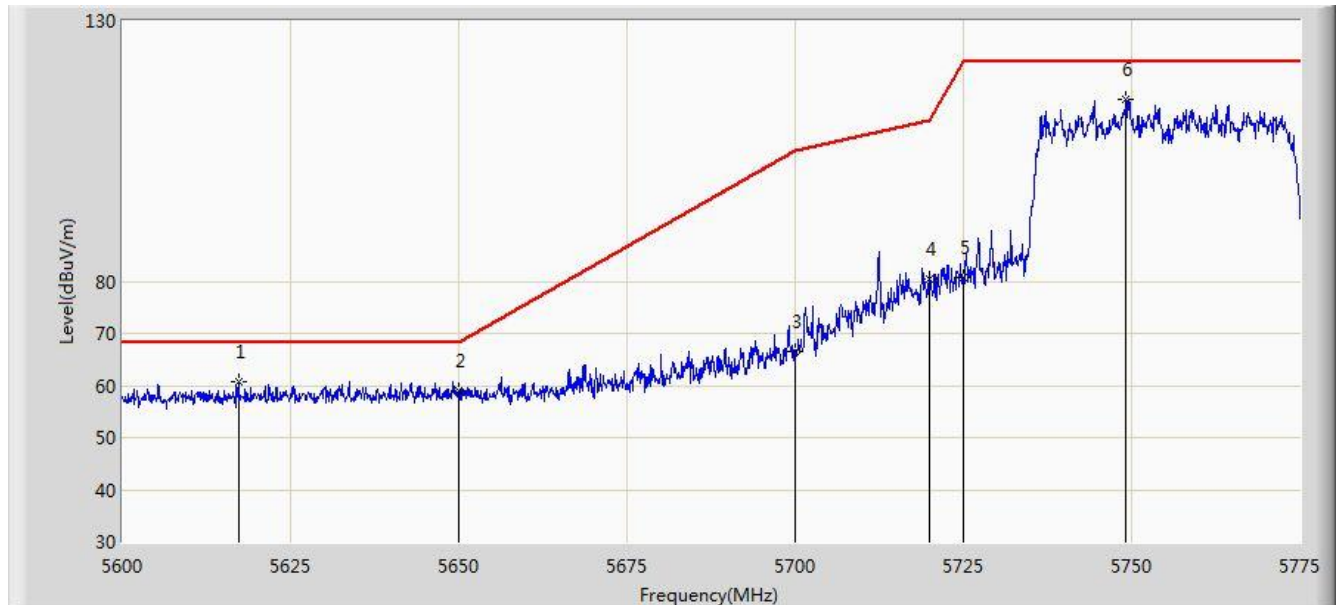


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5617.325	60.775	56.202	-7.425	68.200	4.572	PK
2			5650.000	58.847	54.176	-9.353	68.200	4.671	PK
3			5700.000	66.448	61.570	-38.752	105.200	4.878	PK
4			5720.000	80.366	75.369	-30.434	110.800	4.997	PK
5			5725.000	80.590	75.561	-41.610	122.200	5.029	PK
6		*	5749.187	114.975	109.796	N/A	N/A	5.179	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:46
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode)	

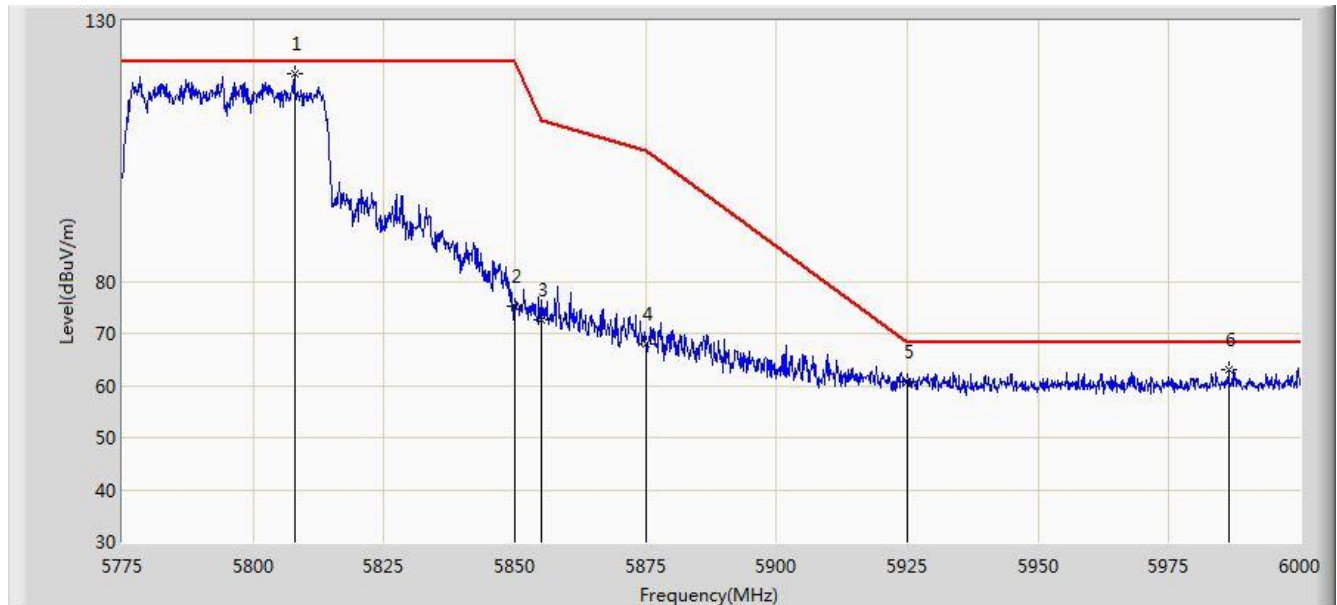


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5807.850	119.991	114.502	N/A	N/A	5.489	PK
2			5850.000	75.319	69.593	-46.881	122.200	5.726	PK
3			5855.000	72.579	66.833	-38.221	110.800	5.746	PK
4			5875.000	67.936	62.116	-37.264	105.200	5.820	PK
5			5925.000	60.713	54.747	-7.487	68.200	5.967	PK
6			5986.388	63.084	56.996	-5.116	68.200	6.089	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:49
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode)	

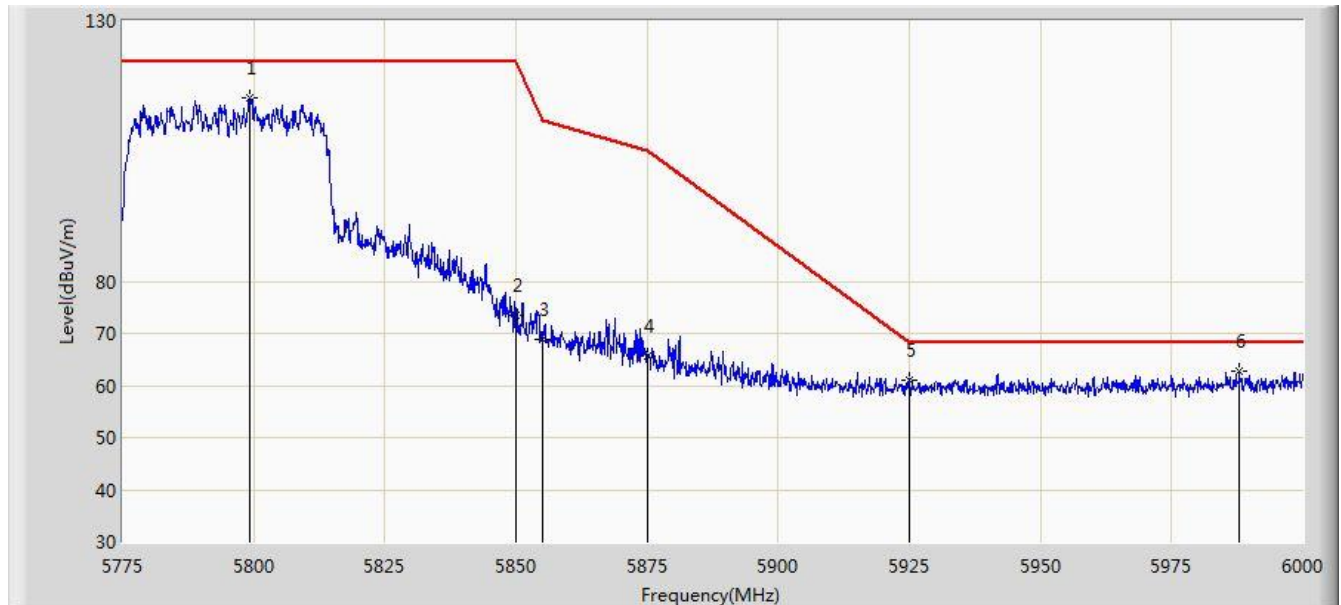


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5799.300	115.195	109.754	N/A	N/A	5.442	PK
2			5850.000	73.468	67.742	-48.732	122.200	5.726	PK
3			5855.000	68.817	63.071	-41.983	110.800	5.746	PK
4			5875.000	65.746	59.926	-39.454	105.200	5.820	PK
5			5925.000	61.094	55.128	-7.106	68.200	5.967	PK
6		*	5987.850	62.865	56.775	-5.335	68.200	6.090	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode)	

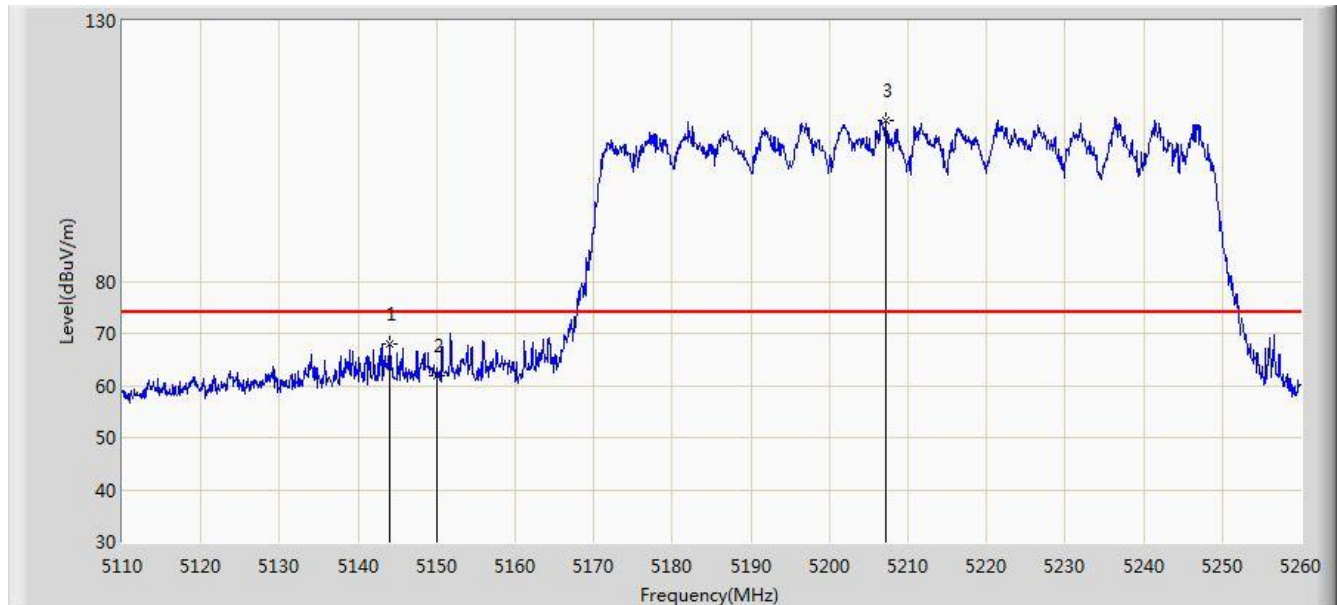


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.050	68.069	63.893	-5.931	74.000	4.176	PK
2			5150.000	61.900	57.731	-12.100	74.000	4.170	PK
3		*	5207.200	110.952	106.975	N/A	N/A	3.976	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 13:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode)	

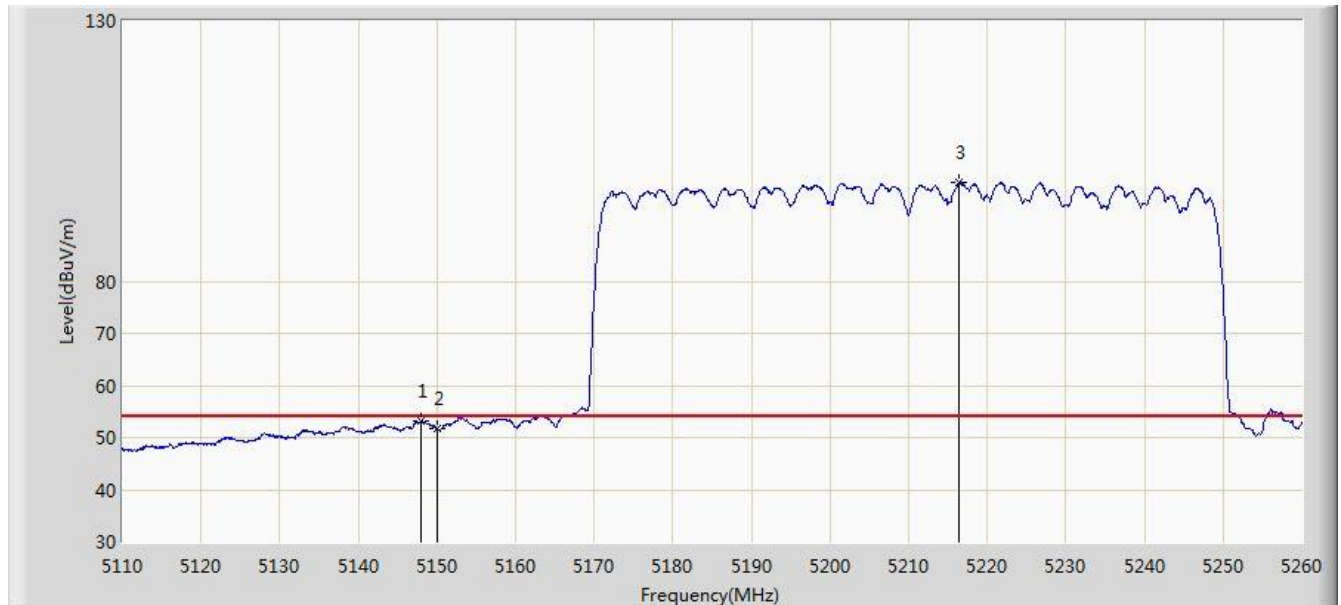


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.025	53.238	49.063	-0.762	54.000	4.176	AV
2			5150.000	51.704	47.535	-2.296	54.000	4.170	AV
3		*	5216.425	98.916	94.966	N/A	N/A	3.950	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode)	

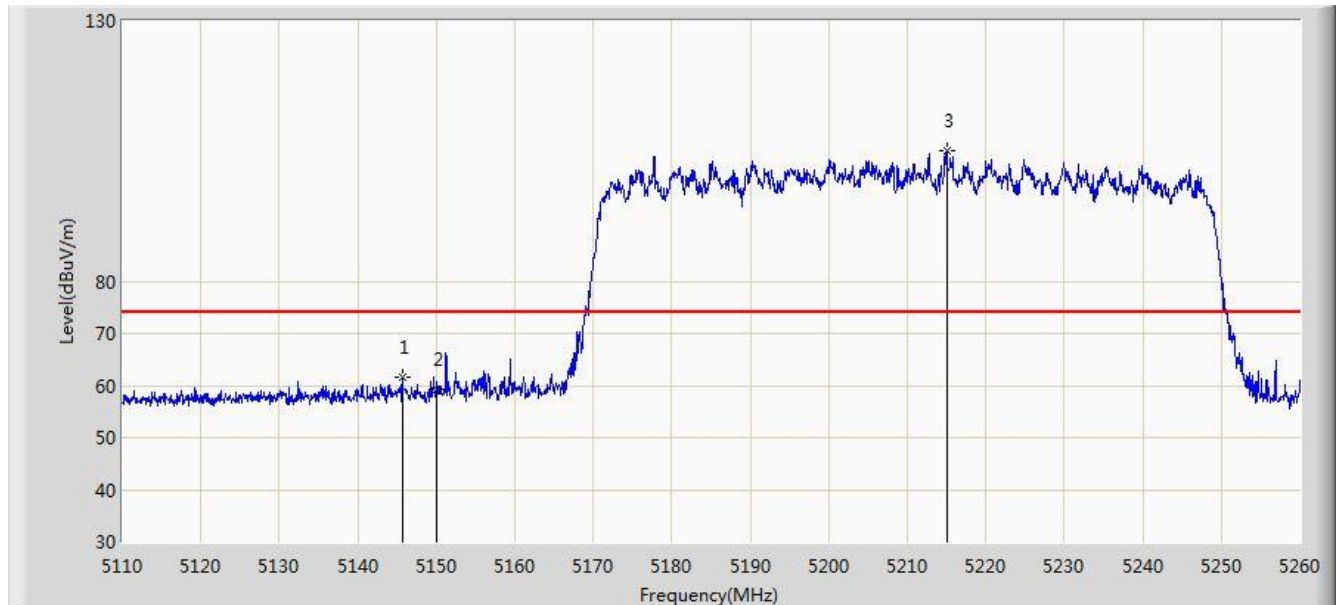


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.700	61.480	57.304	-12.520	74.000	4.176	PK
2			5150.000	59.402	55.233	-14.598	74.000	4.170	PK
3		*	5215.075	105.192	101.238	N/A	N/A	3.954	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode)	

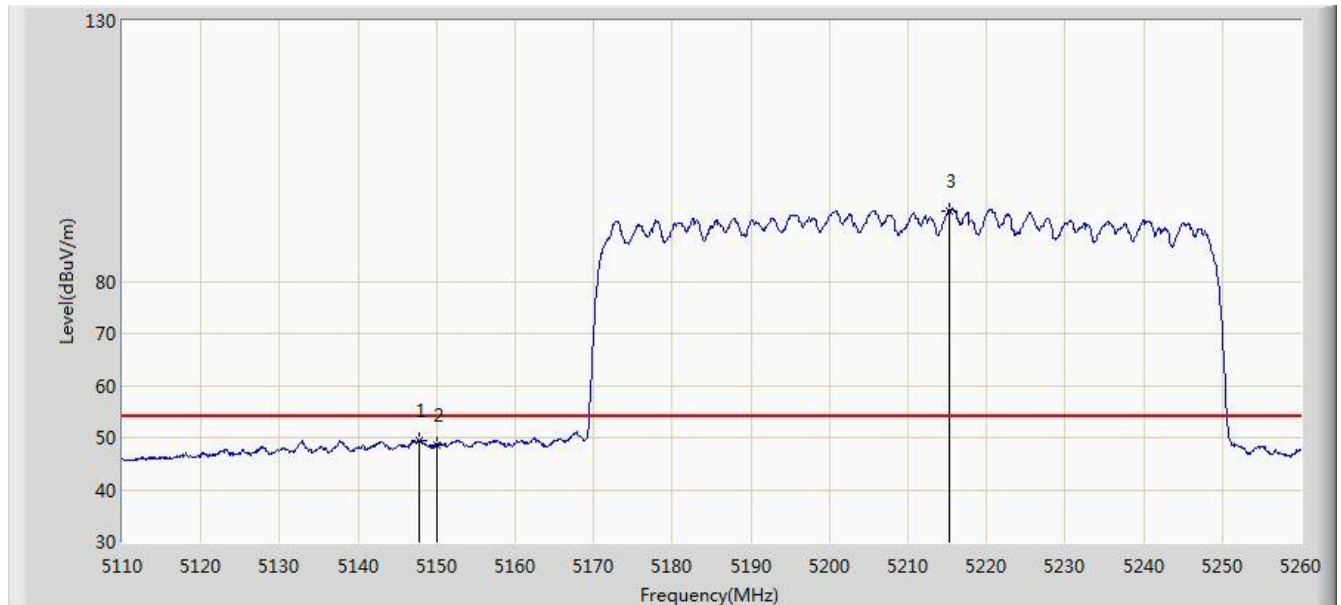


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.800	49.445	45.269	-4.555	54.000	4.176	AV
2			5150.000	48.547	44.378	-5.453	54.000	4.170	AV
3		*	5215.225	93.601	89.648	N/A	N/A	3.953	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz (CDD Mode)	

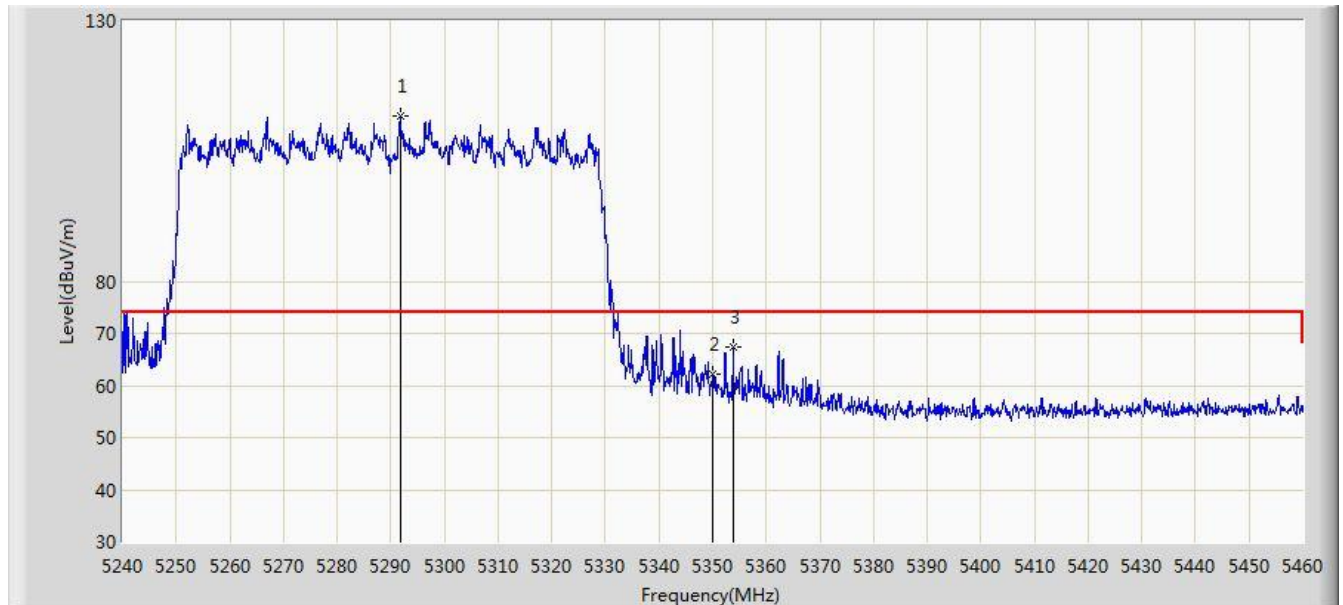


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5291.700	111.682	107.863	N/A	N/A	3.819	PK
2			5350.000	62.067	58.162	-11.933	74.000	3.904	PK
3			5353.850	67.474	63.562	-6.526	74.000	3.912	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz (CDD Mode)	

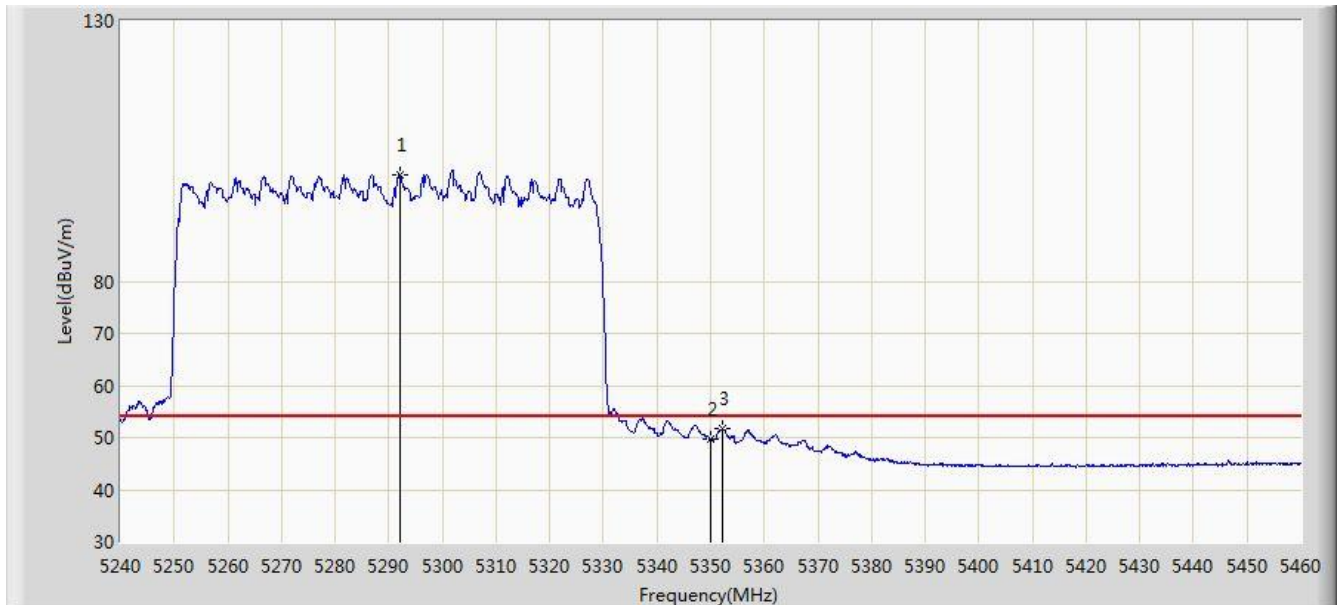


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5292.030	100.386	96.567	N/A	N/A	3.819	AV
2			5350.000	49.689	45.784	-4.311	54.000	3.904	AV
3			5352.310	51.613	47.704	-2.387	54.000	3.909	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz (CDD Mode)	

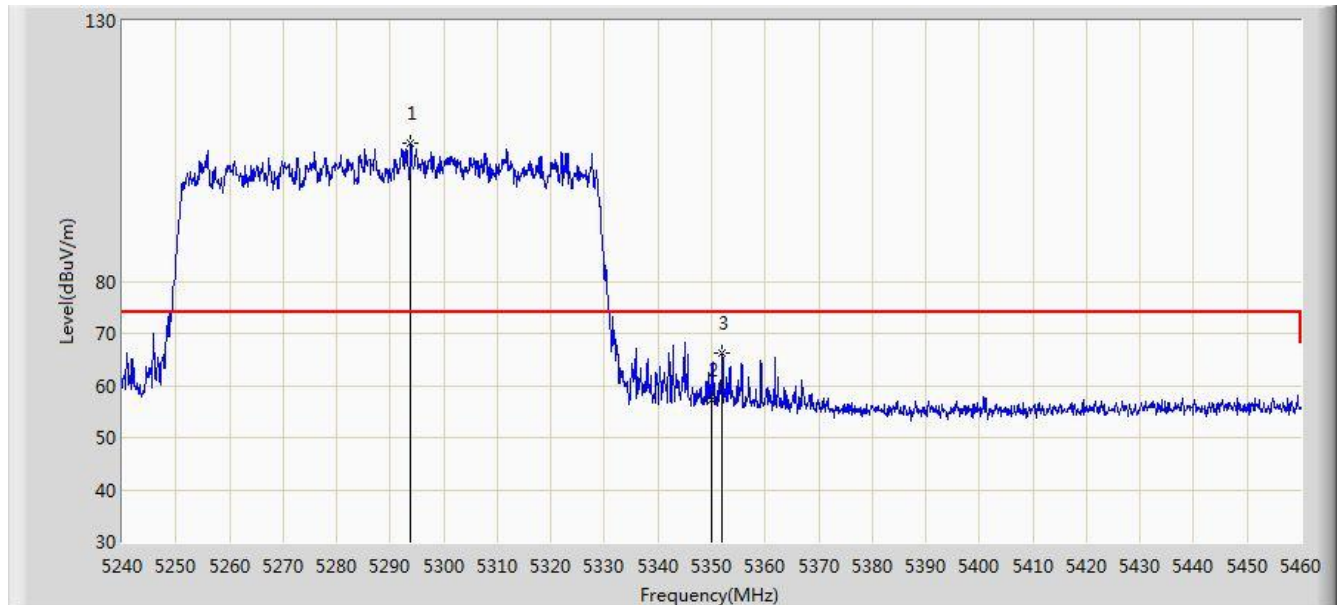


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5293.790	106.424	102.607	N/A	N/A	3.817	PK
2			5350.000	57.351	53.446	-16.649	74.000	3.904	PK
3			5351.980	66.159	62.251	-7.841	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/30 - 14:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz (CDD Mode)	

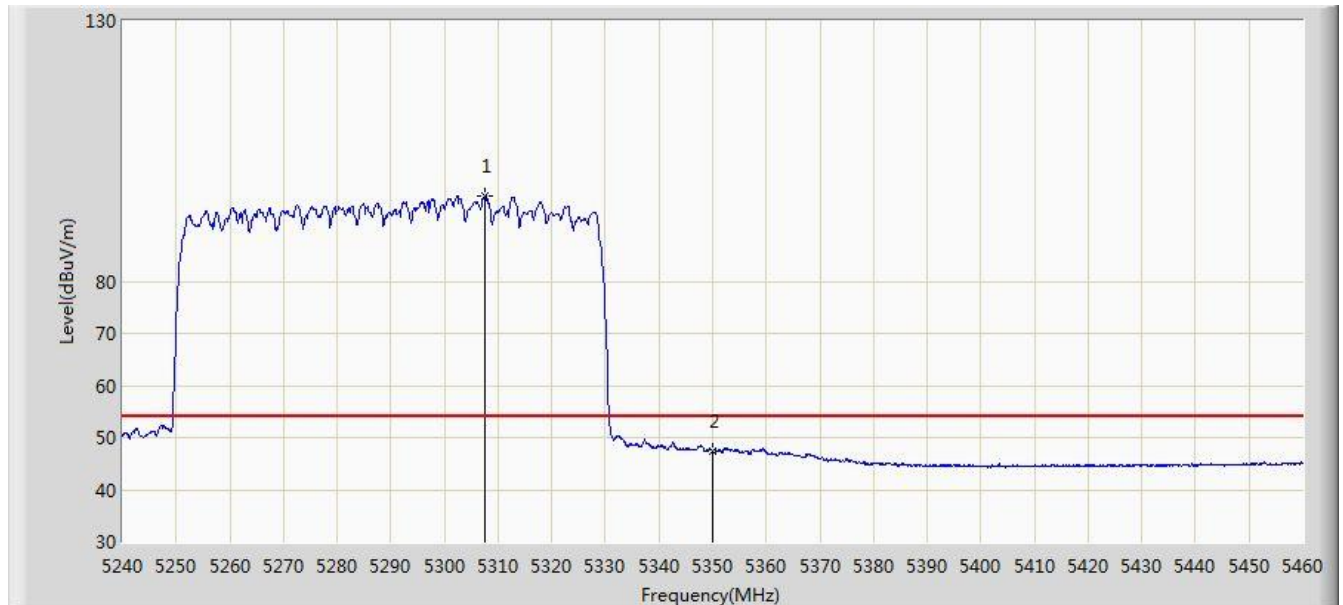


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.540	96.330	92.505	N/A	N/A	3.826	AV
2			5350.000	47.352	43.447	-6.648	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz (CDD Mode)	

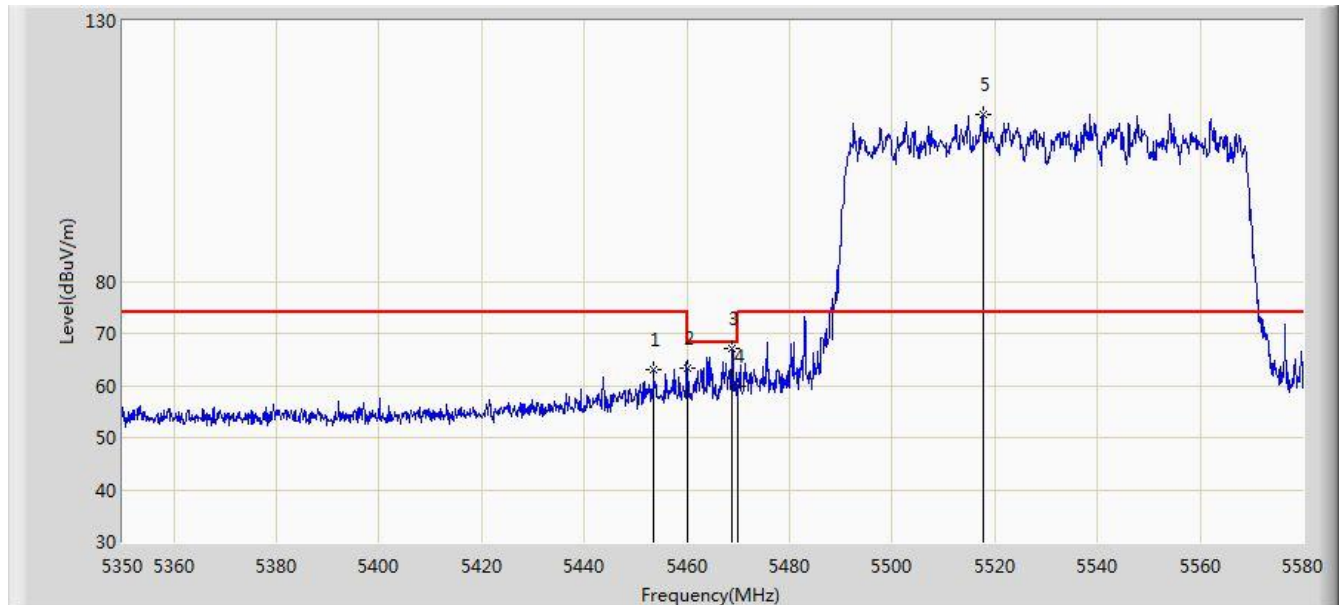


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.500	63.157	58.991	-10.843	74.000	4.166	PK
2			5460.000	63.215	59.035	-10.785	74.000	4.180	PK
3			5468.680	67.158	62.959	-1.042	68.200	4.199	PK
4			5470.000	59.862	55.660	-8.338	68.200	4.202	PK
5		*	5517.670	111.988	107.664	N/A	N/A	4.324	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz (CDD Mode)	

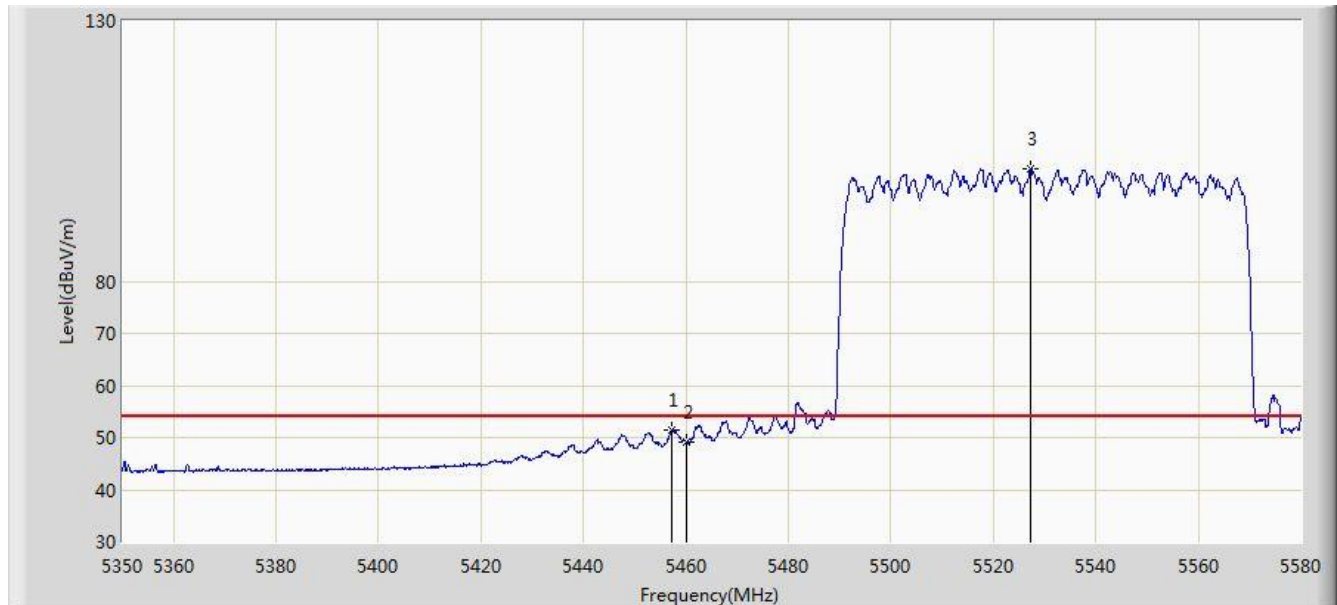


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.180	51.310	47.136	-2.690	54.000	4.174	AV
2			5460.000	49.229	45.049	-4.771	54.000	4.180	AV
3		*	5527.330	101.669	97.316	N/A	N/A	4.353	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz (CDD Mode)	

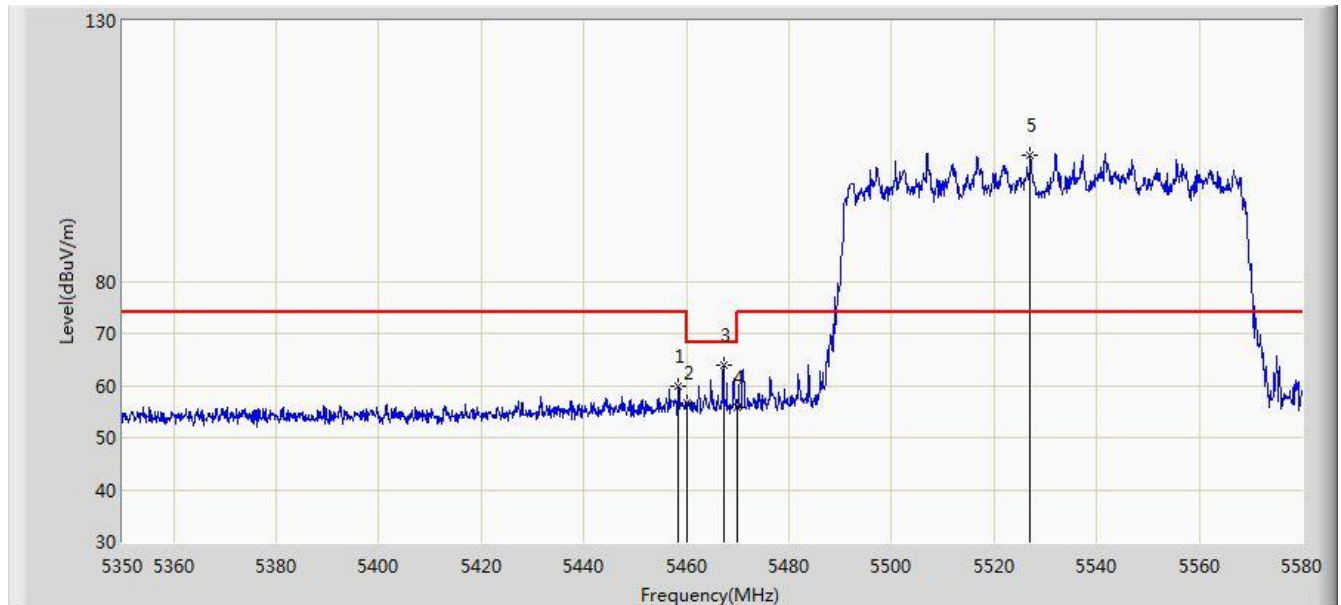


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.445	59.983	55.806	-14.017	74.000	4.177	PK
2			5460.000	56.522	52.342	-17.478	74.000	4.180	PK
3			5467.185	64.010	59.814	-4.190	68.200	4.196	PK
4			5470.000	55.912	51.710	-12.288	68.200	4.202	PK
5		*	5527.100	104.205	99.852	N/A	N/A	4.353	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 07:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz (CDD Mode)	

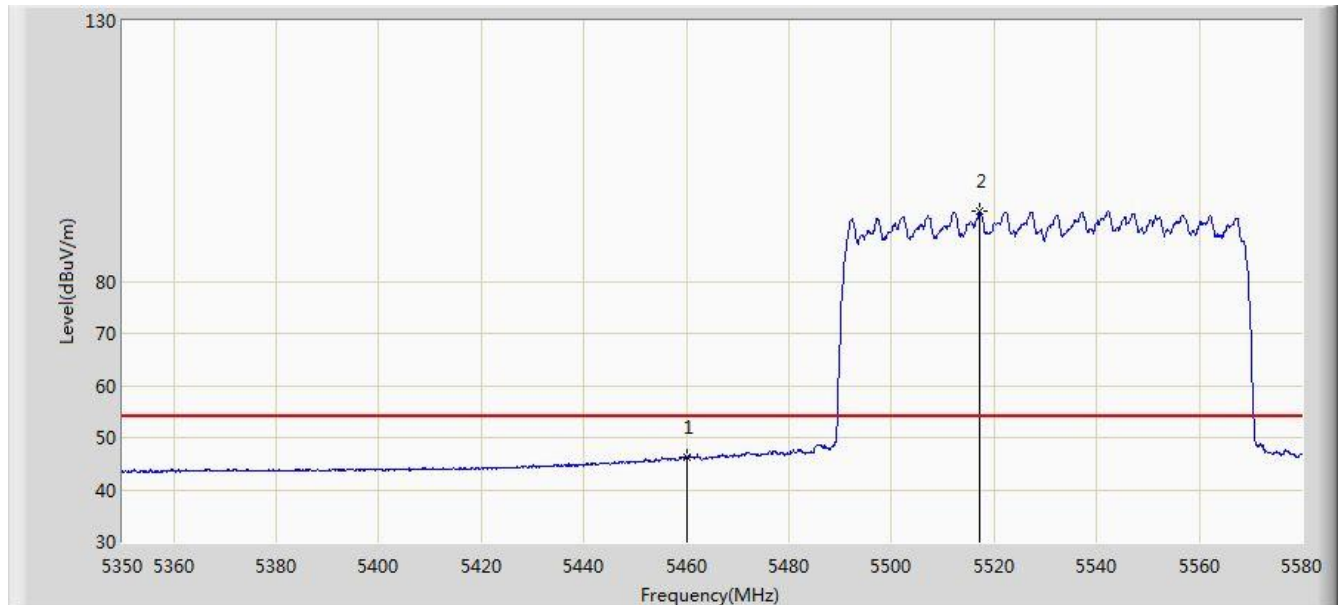


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.108	41.928	-7.892	54.000	4.180	AV
2		*	5517.095	93.350	89.028	N/A	N/A	4.323	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 05:06
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz (CDD Mode)	

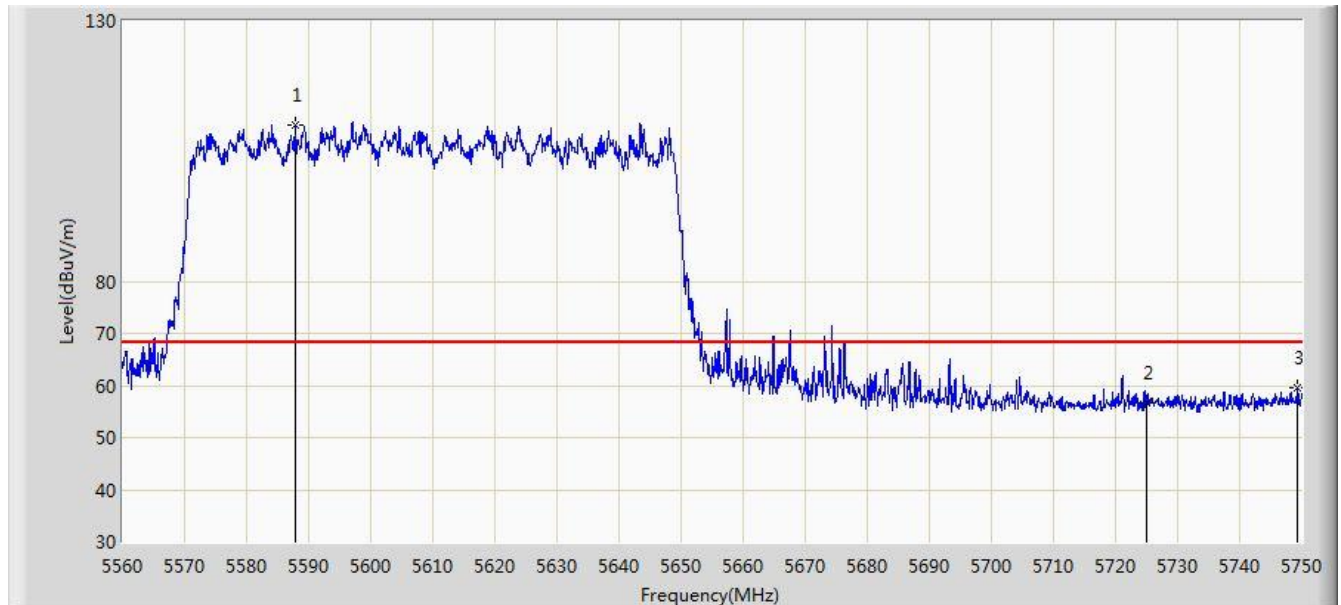


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5587.835	110.122	105.623	N/A	N/A	4.499	PK
2			5725.000	56.749	51.720	-11.451	68.200	5.029	PK
3			5749.335	59.446	54.266	-8.754	68.200	5.179	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 05:06
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz (CDD Mode)	

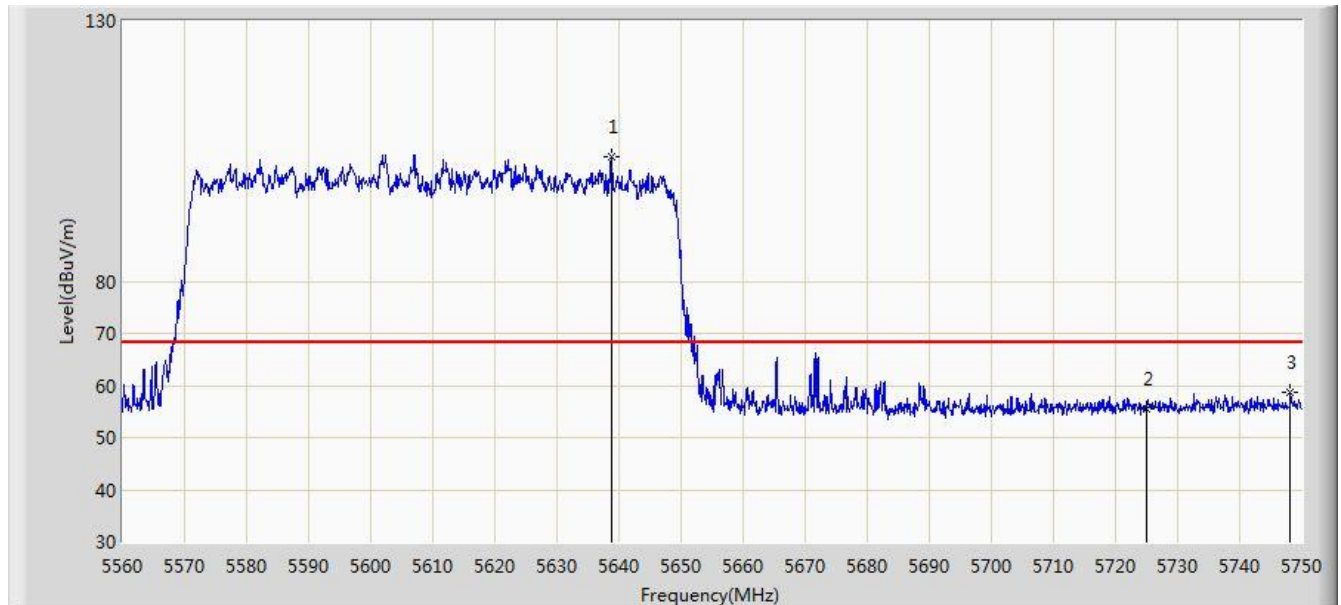


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.755	103.867	99.233	N/A	N/A	4.635	PK
2			5725.000	55.460	50.431	-12.740	68.200	5.029	PK
3			5748.100	58.731	53.558	-9.469	68.200	5.172	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 08:05
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode)	

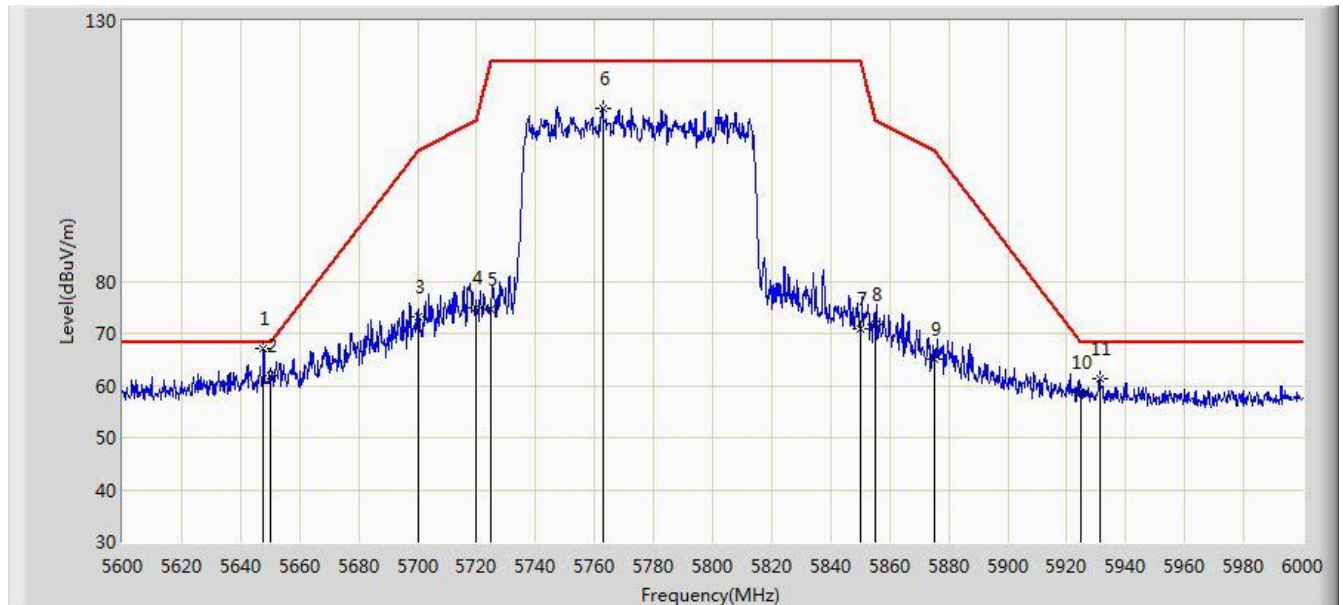


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5647.800	66.969	62.305	-1.231	68.200	4.663	PK
2			5650.000	61.851	57.180	-6.349	68.200	4.671	PK
3			5700.000	73.322	68.444	-31.878	105.200	4.878	PK
4			5720.000	74.811	69.814	-35.989	110.800	4.997	PK
5			5725.000	74.535	69.506	-47.665	122.200	5.029	PK
6			5762.800	113.103	107.849	N/A	N/A	5.254	PK
7			5850.000	70.923	65.197	-51.277	122.200	5.726	PK
8			5855.000	71.779	66.033	-39.021	110.800	5.746	PK
9			5875.000	65.188	59.368	-40.012	105.200	5.820	PK
10			5925.000	58.821	52.855	-9.379	68.200	5.967	PK
11			5931.200	61.266	55.284	-6.934	68.200	5.982	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 08:08
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode)	

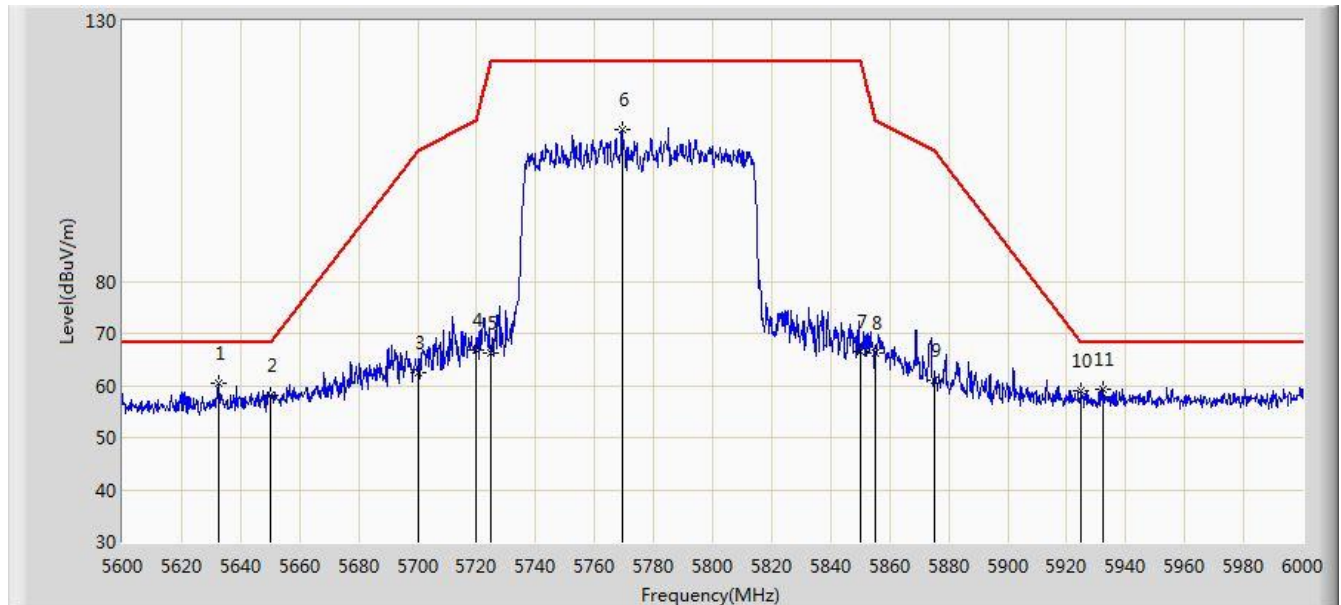


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.400	60.291	55.675	-7.909	68.200	4.616	PK
2			5650.000	58.096	53.425	-10.104	68.200	4.671	PK
3			5700.000	62.350	57.472	-42.850	105.200	4.878	PK
4			5720.000	66.945	61.948	-43.855	110.800	4.997	PK
5			5725.000	66.296	61.267	-55.904	122.200	5.029	PK
6			5769.200	109.042	103.755	N/A	N/A	5.287	PK
7			5850.000	66.578	60.852	-55.622	122.200	5.726	PK
8			5855.000	66.092	60.346	-44.708	110.800	5.746	PK
9			5875.000	61.074	55.254	-44.126	105.200	5.820	PK
10			5925.000	58.991	53.025	-9.209	68.200	5.967	PK
11			5932.200	59.366	53.382	-8.834	68.200	5.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 00:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5210MHz (CDD Mode)	

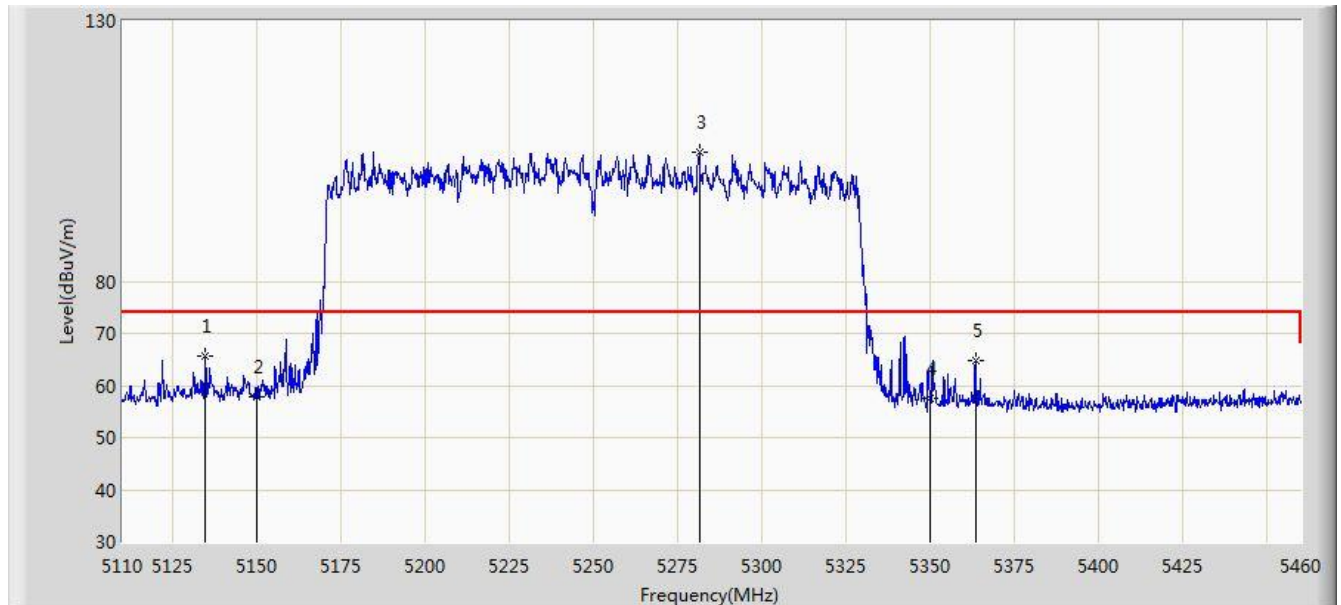


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.675	65.745	61.570	-8.255	74.000	4.175	PK
2			5150.000	57.744	53.575	-16.256	74.000	4.170	PK
3		*	5281.325	104.705	100.879	N/A	N/A	3.825	PK
4			5350.000	57.541	53.636	-16.459	74.000	3.904	PK
5			5363.400	64.775	60.846	-9.225	74.000	3.928	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 00:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5210MHz (CDD Mode)	

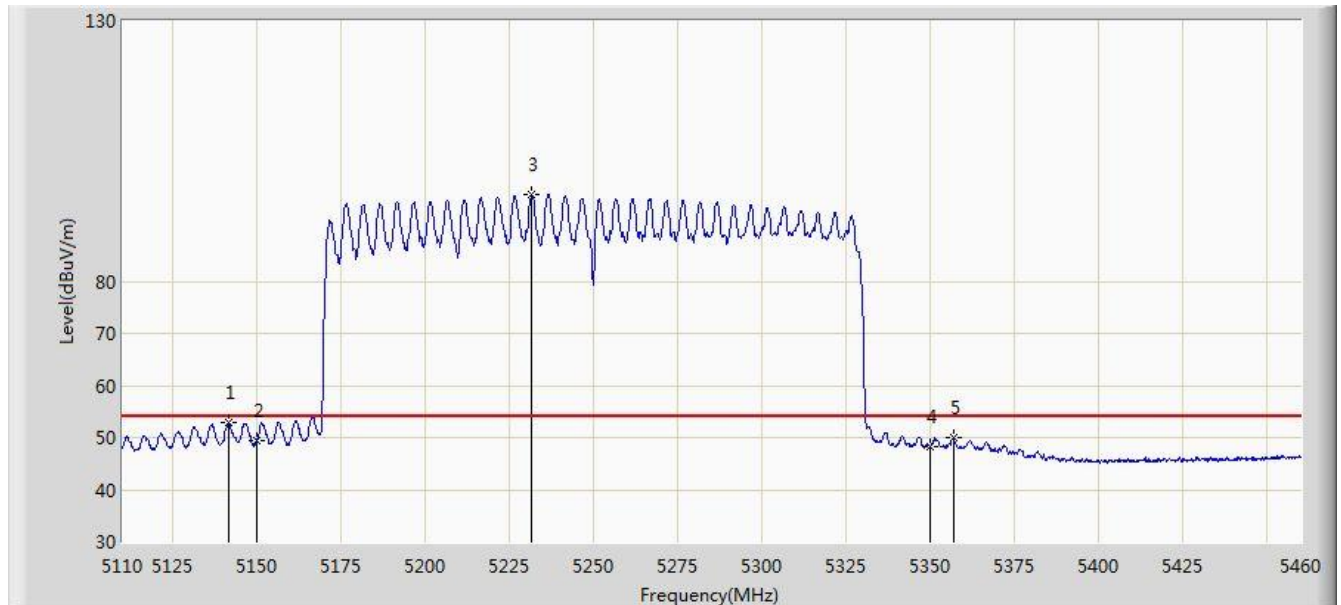


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.500	52.857	48.681	-1.143	54.000	4.176	AV
2			5150.000	49.309	45.140	-4.691	54.000	4.170	AV
3		*	5231.450	96.636	92.731	N/A	N/A	3.906	AV
4			5350.000	48.297	44.392	-5.703	54.000	3.904	AV
5			5356.925	49.873	45.956	-4.127	54.000	3.917	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 00:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5210MHz (CDD Mode)	

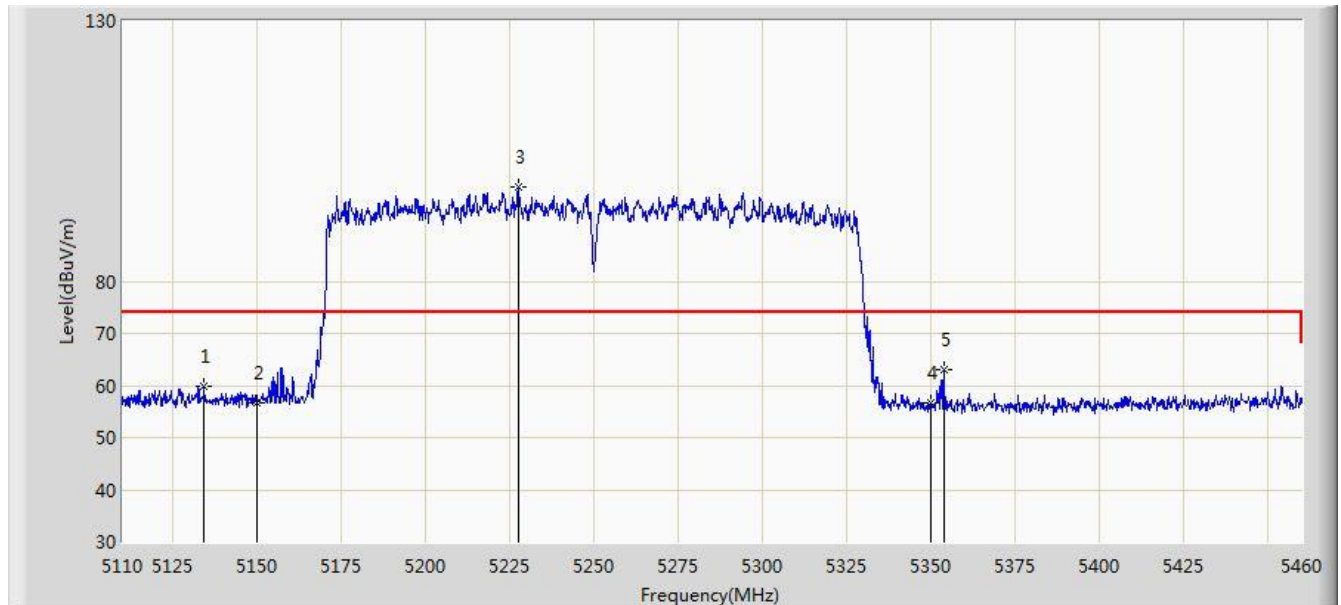


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.150	59.915	55.740	-14.085	74.000	4.175	PK
2			5150.000	56.780	52.611	-17.220	74.000	4.170	PK
3		*	5227.600	98.169	94.253	N/A	N/A	3.916	PK
4			5350.000	56.643	52.738	-17.357	74.000	3.904	PK
5			5353.775	62.901	58.989	-11.099	74.000	3.911	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/27 - 00:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5210MHz (CDD Mode)	

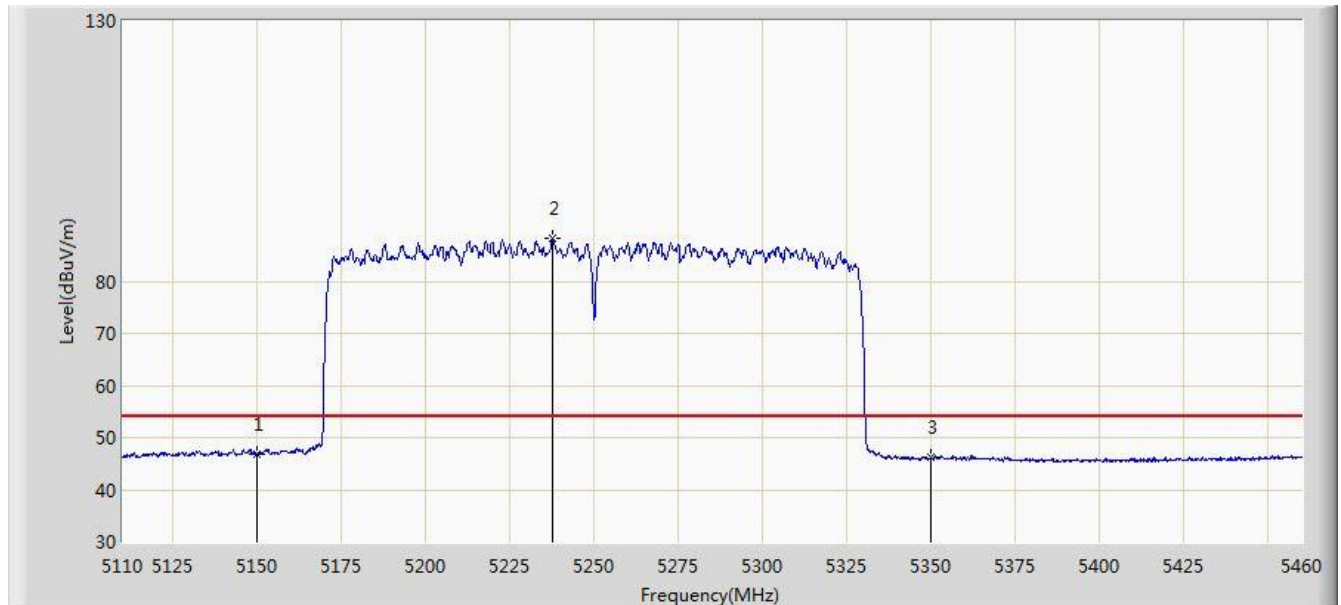


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.853	42.684	-7.147	54.000	4.170	AV
2		*	5237.750	88.235	84.349	N/A	N/A	3.887	AV
3			5350.000	46.106	42.201	-7.894	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 03:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5570MHz (CDD Mode)	

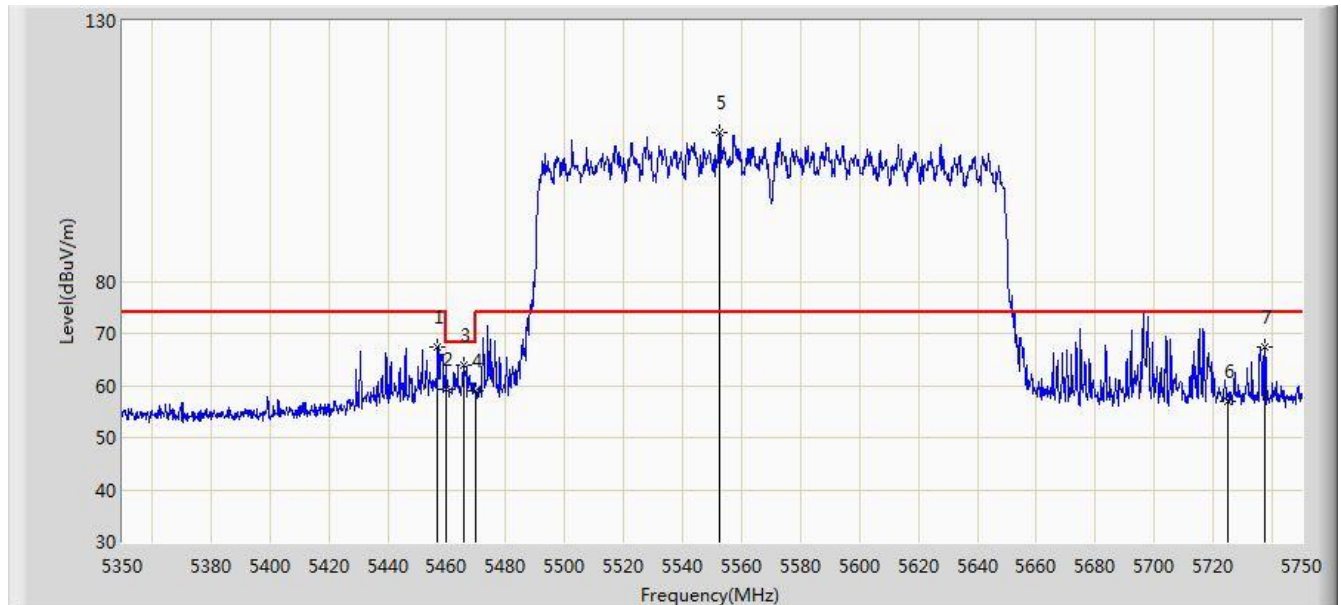


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.000	67.493	63.319	-6.507	74.000	4.173	PK
2			5460.000	59.282	55.102	-14.718	74.000	4.180	PK
3			5465.600	63.844	59.651	-4.356	68.200	4.193	PK
4			5470.000	58.898	54.696	-9.302	68.200	4.202	PK
5		*	5552.600	108.459	104.034	N/A	N/A	4.425	PK
6			5725.000	56.990	51.961	-17.010	74.000	5.029	PK
7			5737.600	67.297	62.188	-6.703	74.000	5.109	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 03:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5570MHz (CDD Mode)	

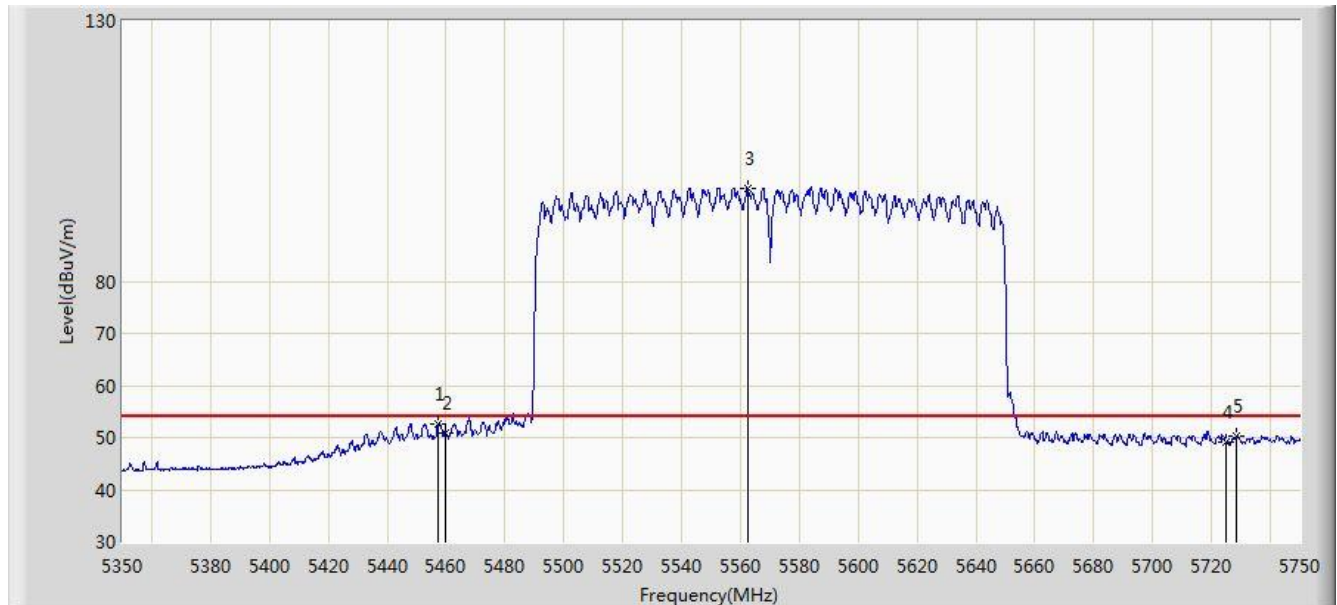


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5457.400	52.751	48.576	-1.249	54.000	4.175	AV
2			5460.000	50.974	46.794	-3.026	54.000	4.180	AV
3		*	5562.600	97.947	93.500	N/A	N/A	4.446	AV
4			5725.000	49.141	44.112	-4.859	54.000	5.029	AV
5			5728.600	50.352	45.300	-3.648	54.000	5.052	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 03:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5570MHz (CDD Mode)	

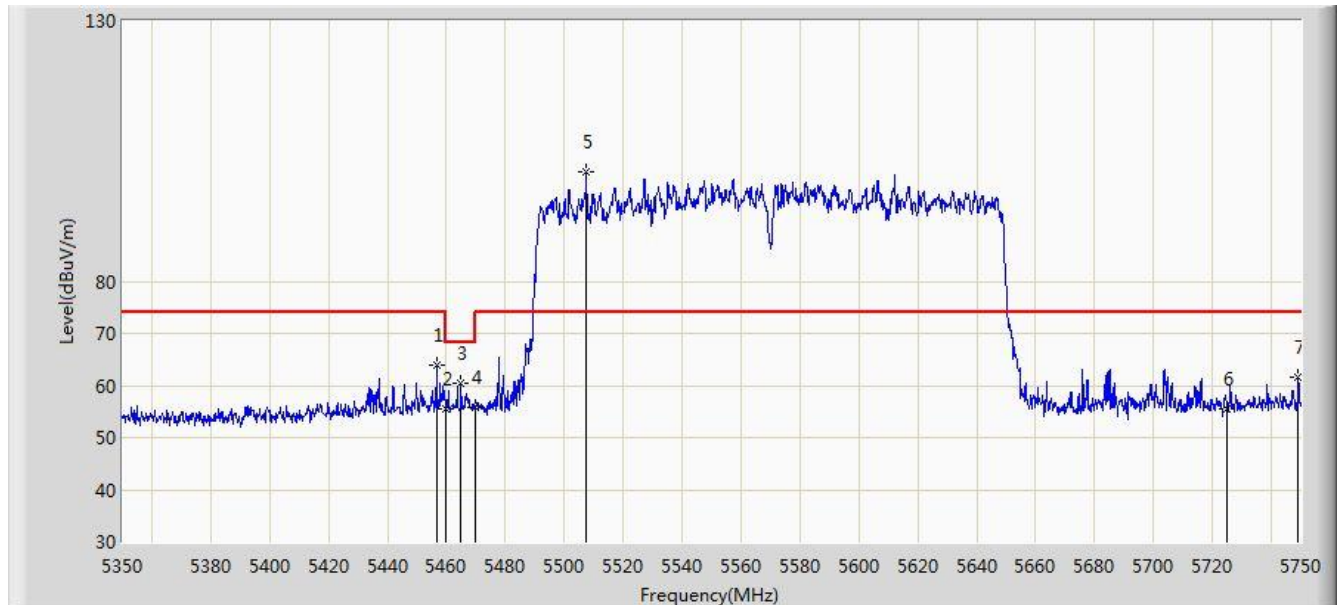


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.800	63.930	59.757	-10.070	74.000	4.173	PK
2			5460.000	55.419	51.239	-18.581	74.000	4.180	PK
3			5465.000	60.488	56.297	-7.712	68.200	4.191	PK
4			5470.000	55.738	51.536	-12.462	68.200	4.202	PK
5		*	5507.400	101.019	96.725	N/A	N/A	4.293	PK
6			5725.000	55.502	50.473	-18.498	74.000	5.029	PK
7			5749.200	61.704	56.525	-12.296	74.000	5.179	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/28 - 03:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at Channel 5570MHz (CDD Mode)	

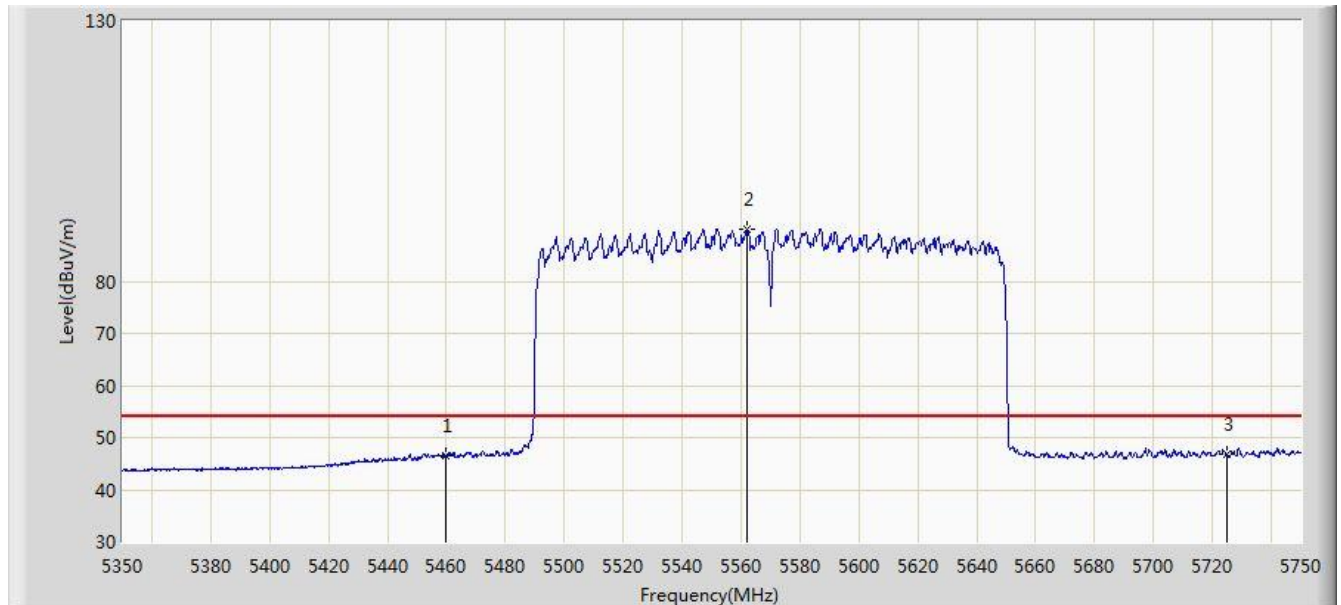


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.456	42.276	-7.544	54.000	4.180	AV
2		*	5562.200	90.123	85.677	N/A	N/A	4.447	AV
3			5725.000	46.680	41.651	-7.320	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 16:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5180MHz (Beam-Forming Mode)	

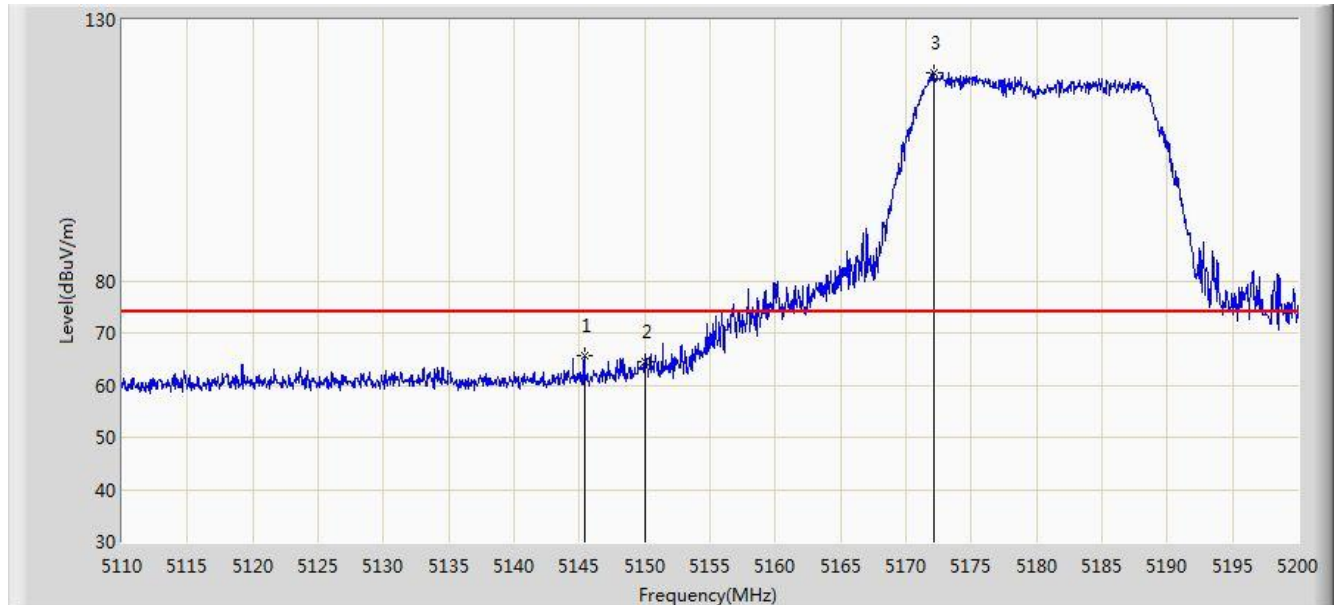


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.370	65.607	61.431	-8.393	74.000	4.176	PK
2			5150.000	64.637	60.468	-9.363	74.000	4.170	PK
3		*	5172.145	119.963	115.866	N/A	N/A	4.097	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 16:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5180MHz (Beam-Forming Mode)	

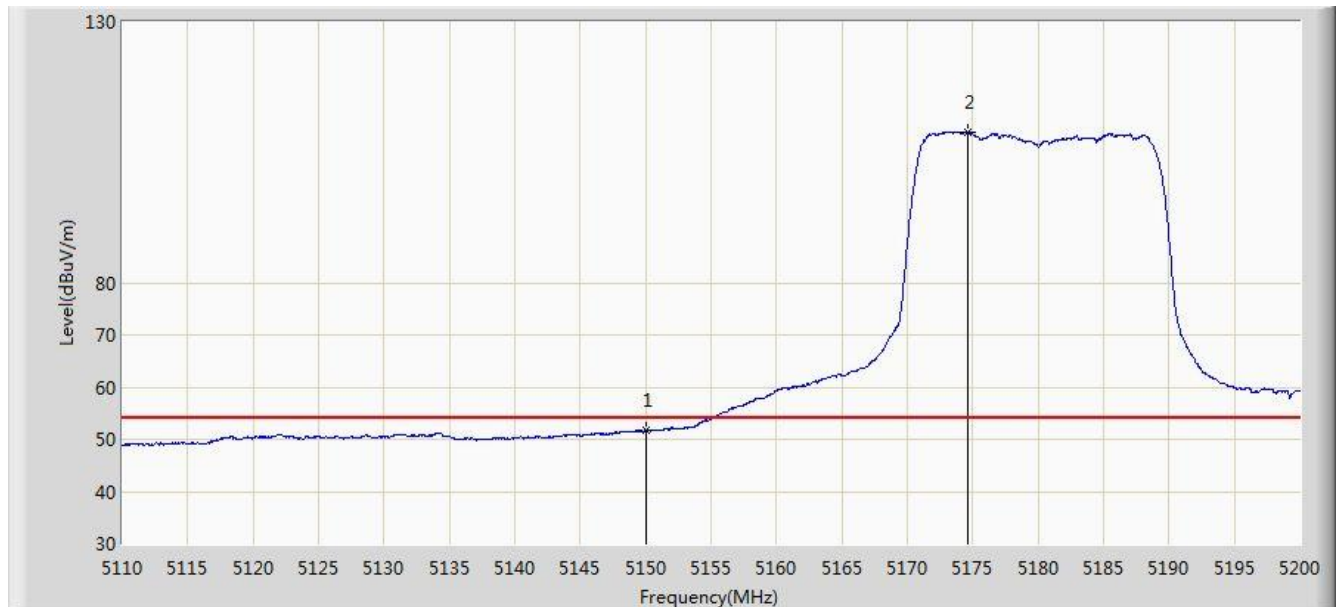


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.639	47.470	-2.361	54.000	4.170	AV
2	X	*	5174.575	108.790	104.702	N/A	N/A	4.088	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5180MHz (Beam-Forming Mode)	

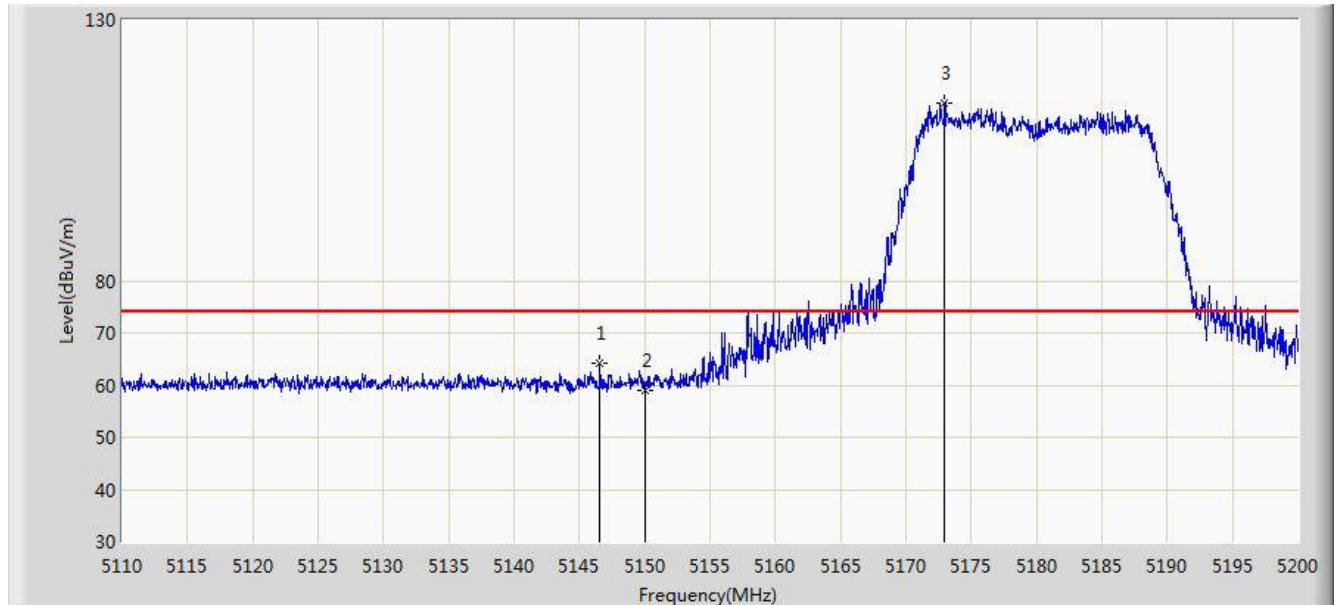


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.585	64.113	59.937	-9.887	74.000	4.176	PK
2			5150.000	59.127	54.958	-14.873	74.000	4.170	PK
3		*	5172.955	114.090	109.996	N/A	N/A	4.094	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5180MHz (Beam-Forming Mode)	

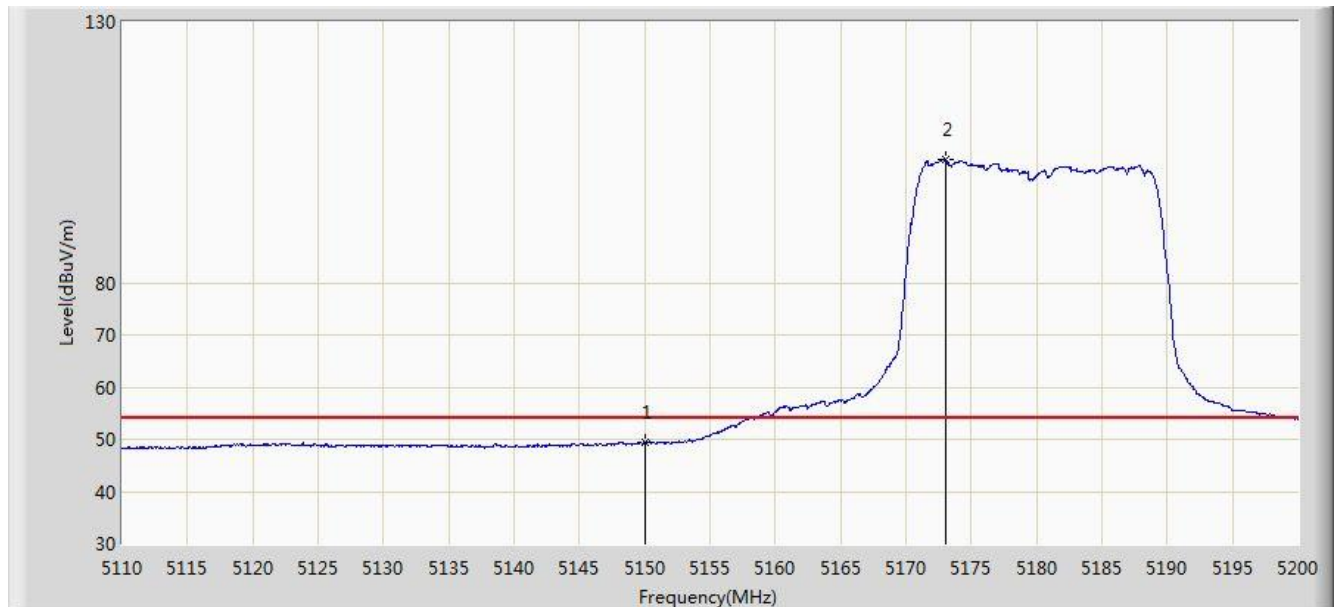


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.278	45.109	-4.722	54.000	4.170	AV
2		*	5173.090	103.521	99.428	N/A	N/A	4.093	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5320MHz (Beam-Forming Mode)	

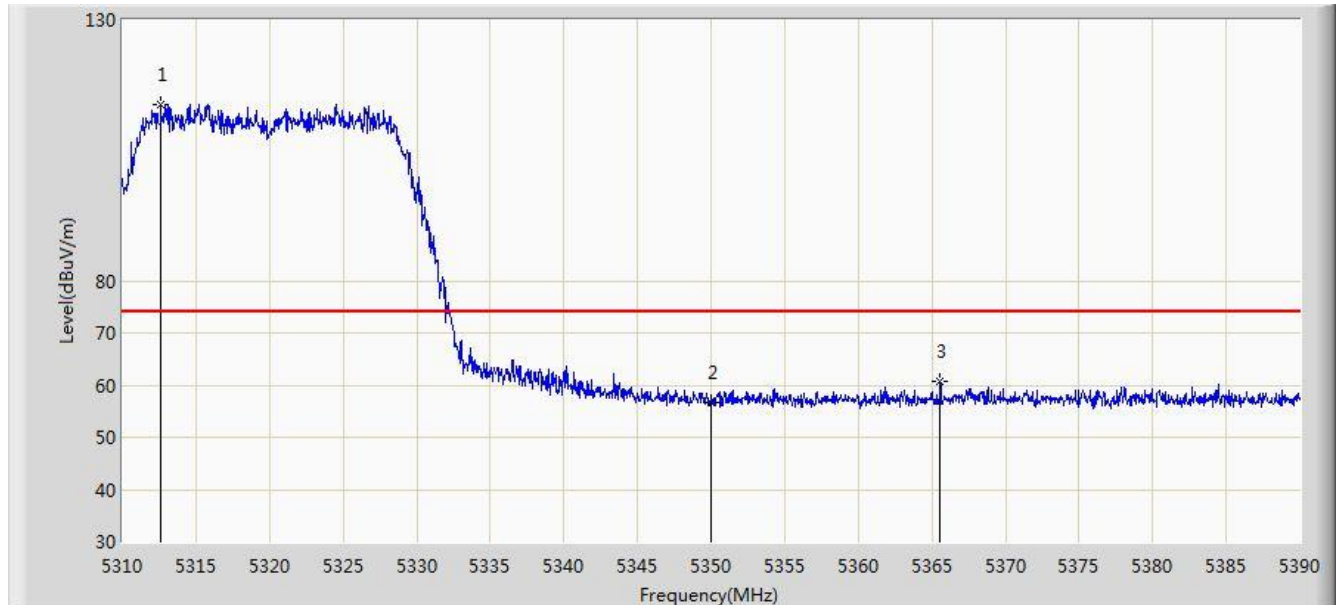


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.600	113.716	109.881	N/A	N/A	3.834	PK
2			5350.000	56.768	52.863	-17.232	74.000	3.904	PK
3			5365.560	60.726	56.793	-13.274	74.000	3.933	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5320MHz (Beam-Forming Mode)	

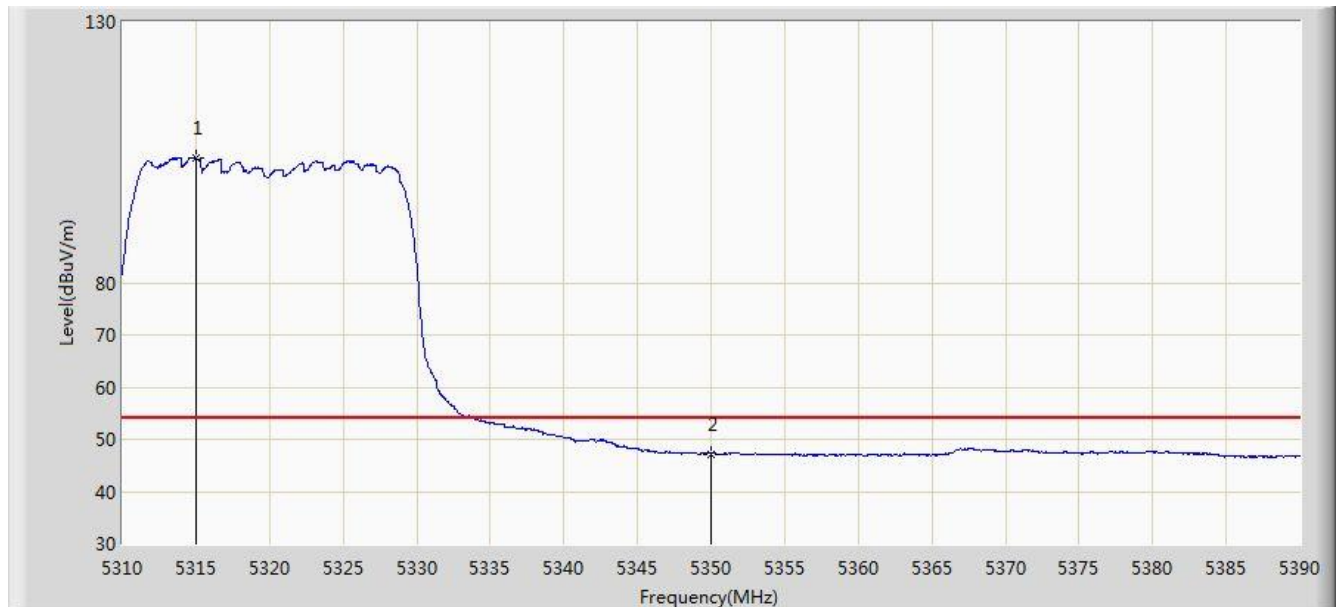


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.040	103.778	99.939	N/A	N/A	3.839	AV
2			5350.000	47.212	43.307	-6.788	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5320MHz (Beam-Forming Mode)	

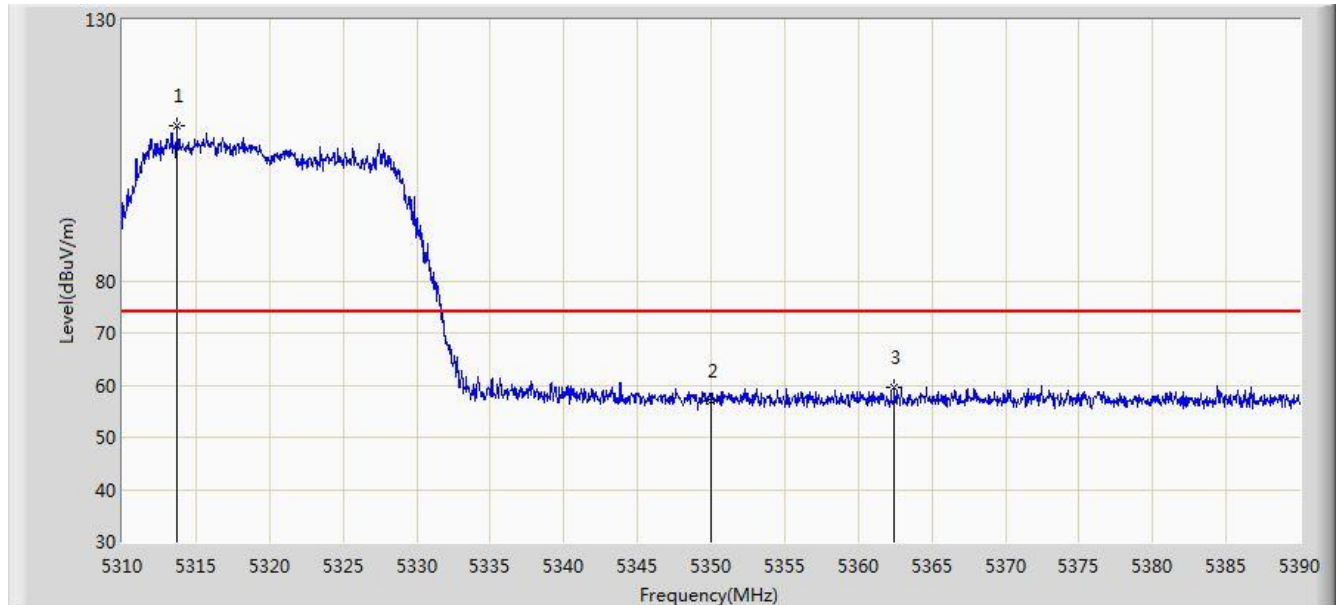


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.720	109.714	105.877	N/A	N/A	3.836	PK
2			5350.000	57.000	53.095	-17.000	74.000	3.904	PK
3			5362.480	59.702	55.775	-14.298	74.000	3.927	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5320MHz (Beam-Forming Mode)	

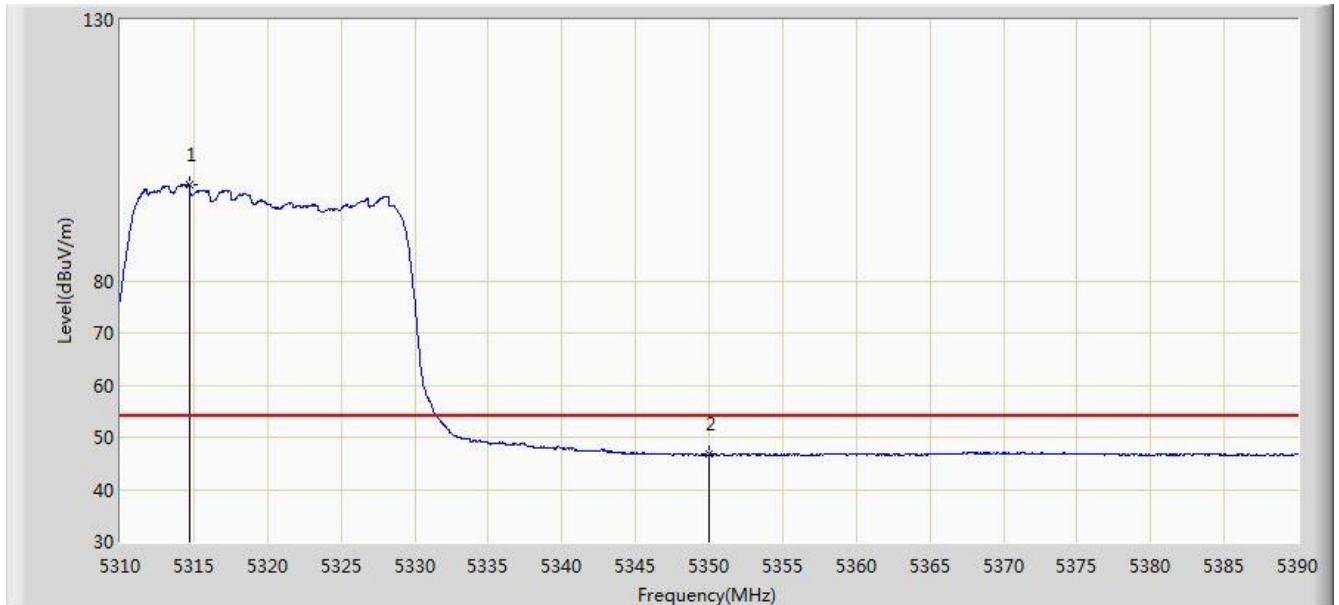


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.680	98.325	94.486	N/A	N/A	3.838	AV
2			5350.000	46.737	42.832	-7.263	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5500MHz (Beam-Forming Mode)	

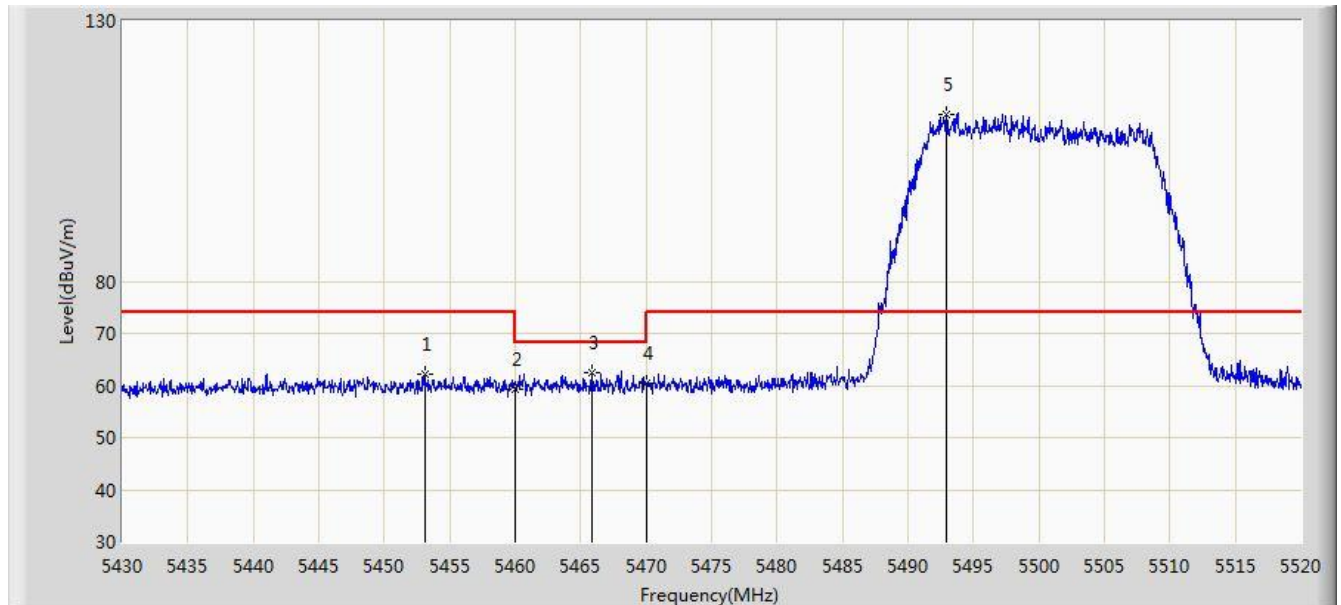


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.130	62.146	57.981	-11.854	74.000	4.164	PK
2			5460.000	59.375	55.195	-14.625	74.000	4.180	PK
3			5465.820	62.506	58.313	-5.694	68.200	4.193	PK
4			5470.000	60.379	56.177	-7.821	68.200	4.202	PK
5		*	5492.955	112.149	107.894	N/A	N/A	4.254	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5500MHz (Beam-Forming Mode)	

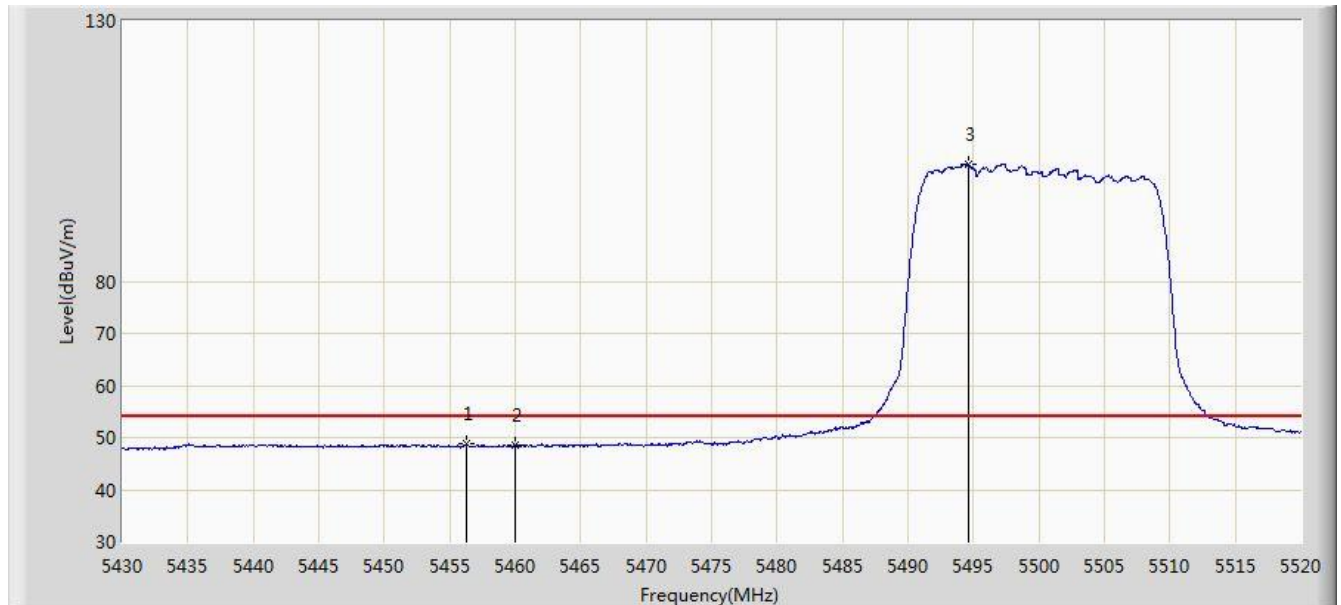


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.235	48.743	44.571	-5.257	54.000	4.172	AV
2			5460.000	48.461	44.281	-5.539	54.000	4.180	AV
3		*	5494.620	102.517	98.259	N/A	N/A	4.259	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5500MHz (Beam-Forming Mode)	

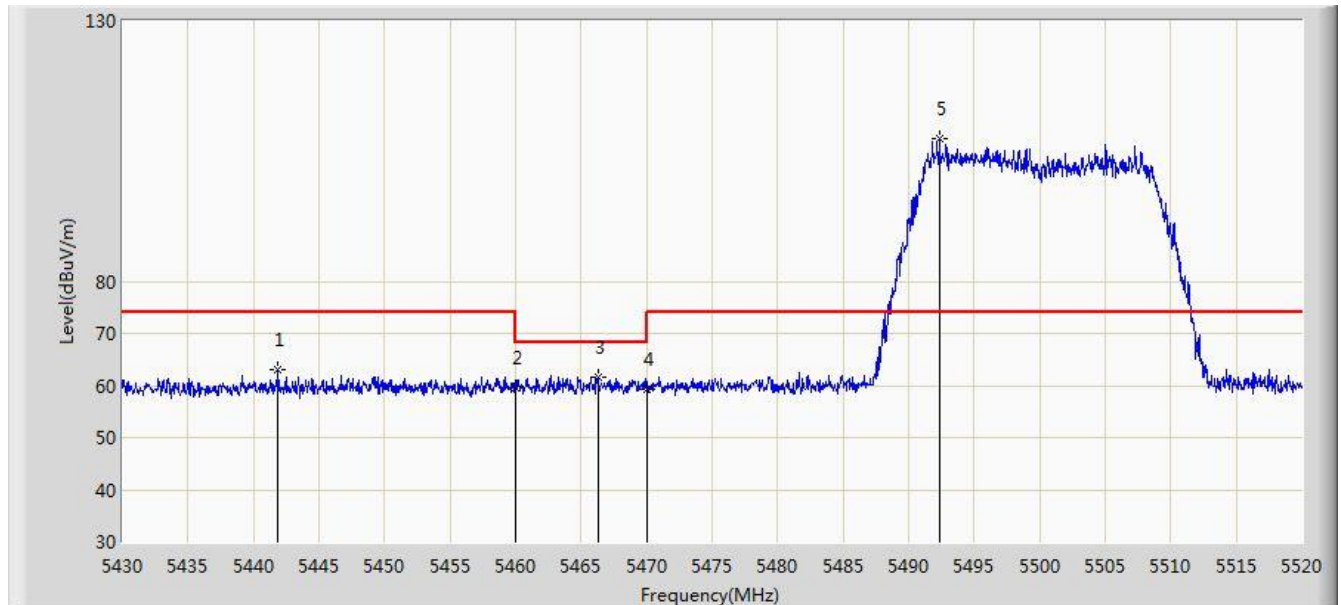


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.880	62.943	58.813	-11.057	74.000	4.130	PK
2			5460.000	59.532	55.352	-14.468	74.000	4.180	PK
3			5466.315	61.565	57.371	-6.635	68.200	4.194	PK
4			5470.000	59.399	55.197	-8.801	68.200	4.202	PK
5		*	5492.370	107.343	103.090	N/A	N/A	4.253	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5500MHz (Beam-Forming Mode)	

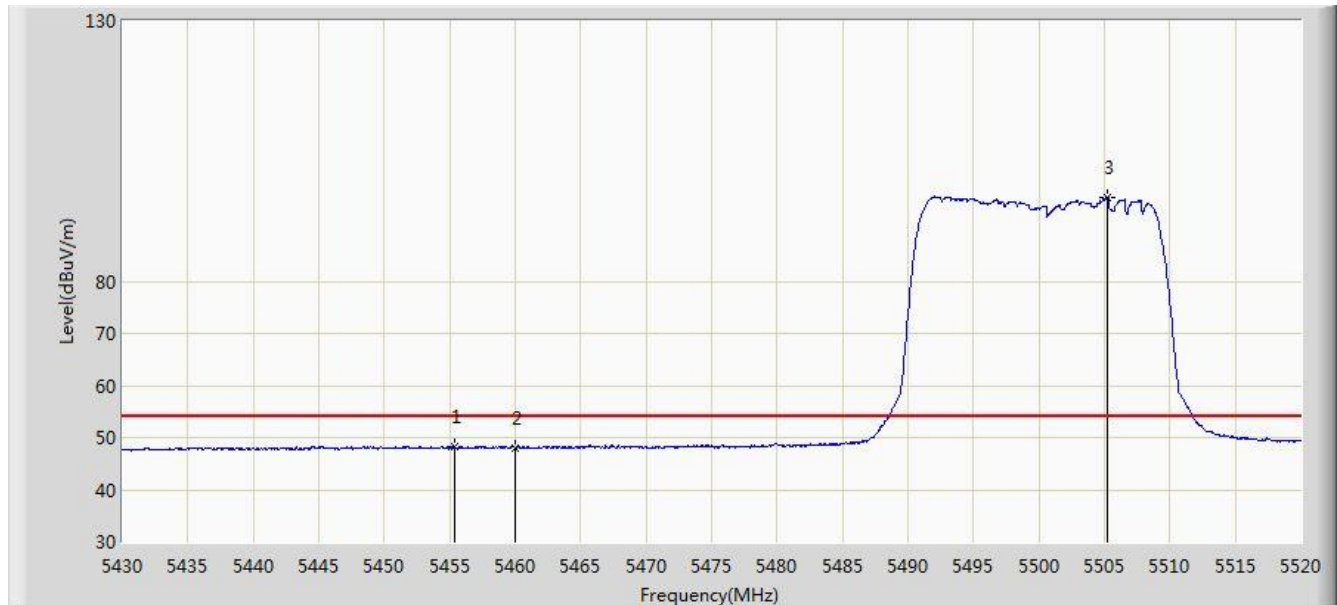


d	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.335	48.210	44.040	-5.790	54.000	4.170	AV
2			5460.000	48.061	43.881	-5.939	54.000	4.180	AV
3		*	5505.240	96.176	91.889	N/A	N/A	4.287	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:29
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5700MHz (Beam-Forming Mode)	

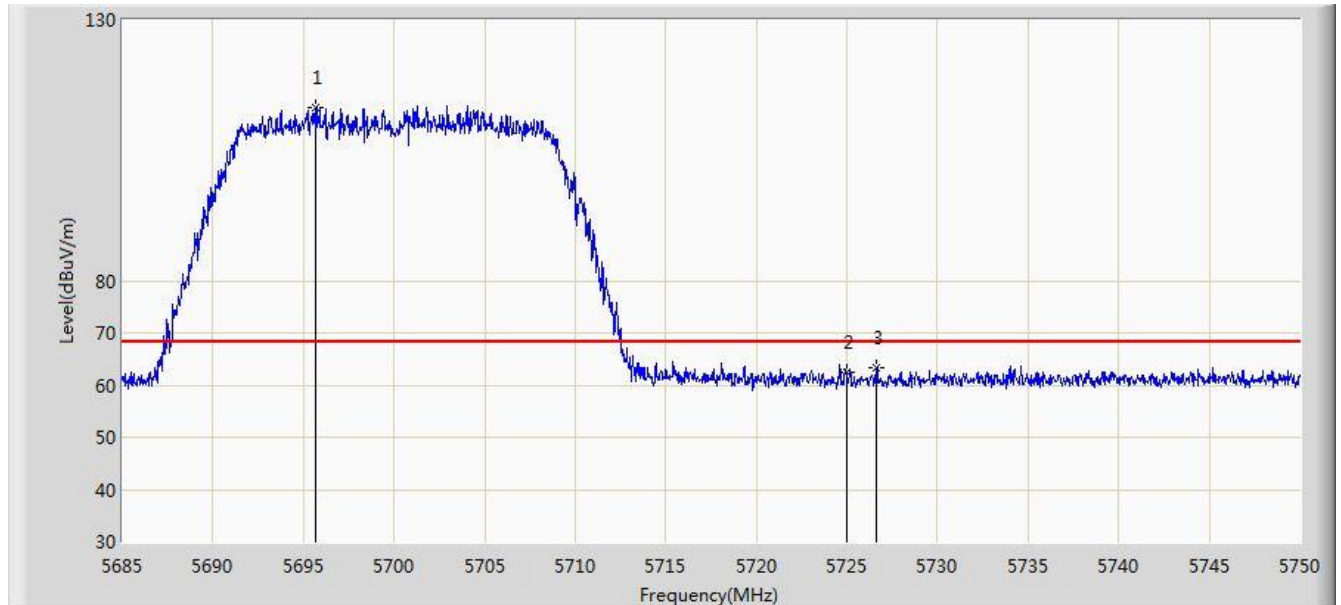


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.692	113.150	108.295	N/A	N/A	4.855	PK
2			5725.000	62.407	57.378	-5.793	68.200	5.029	PK
3			5726.632	63.349	58.310	-4.851	68.200	5.039	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:33
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5700MHz (Beam-Forming Mode)	

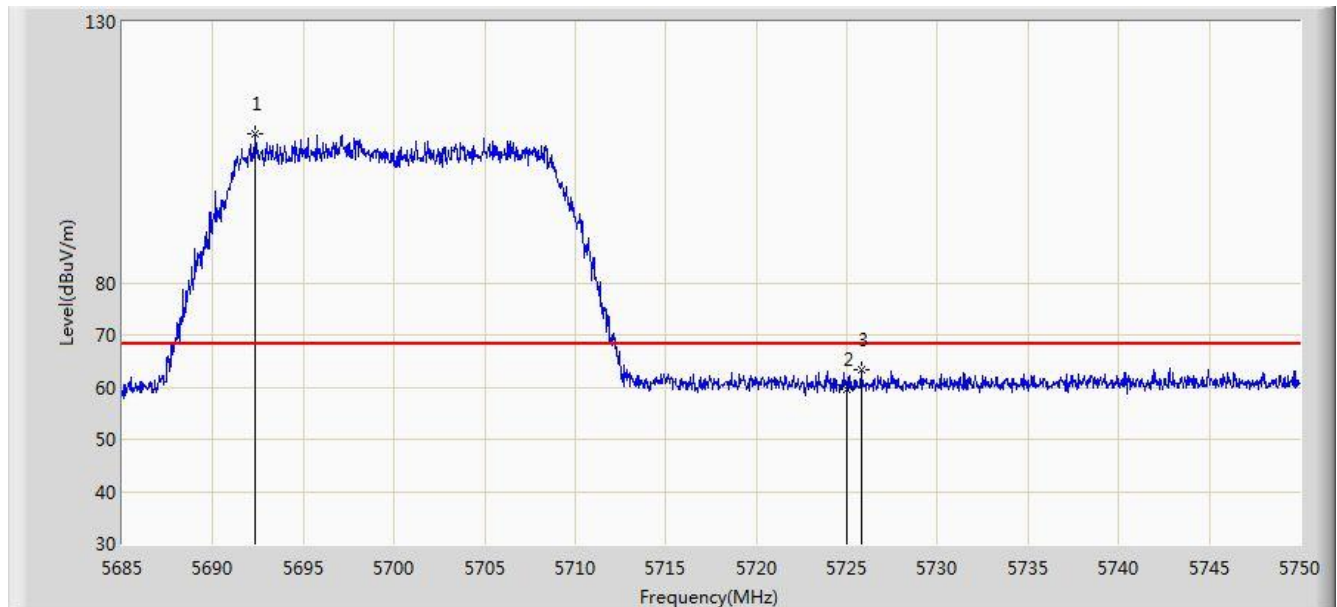


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5692.345	108.406	103.568	N/A	N/A	4.838	PK
2			5725.000	59.606	54.577	-8.594	68.200	5.029	PK
3			5725.788	63.194	58.160	-5.006	68.200	5.033	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:47
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5745MHz (Beam-Forming Mode)	

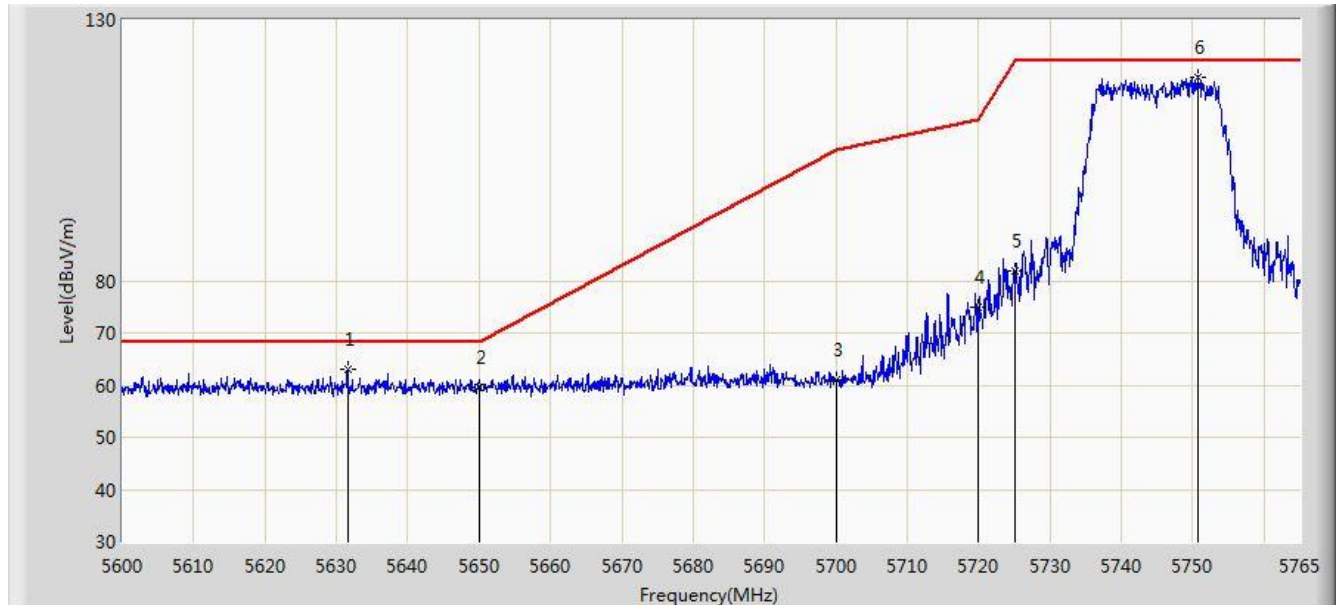


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.598	62.960	58.346	-5.240	68.200	4.614	PK
2			5650.000	59.610	54.939	-8.590	68.200	4.671	PK
3			5700.000	61.027	56.149	-44.173	105.200	4.878	PK
4			5720.000	74.809	69.812	-35.991	110.800	4.997	PK
5			5725.000	82.007	76.978	-40.193	122.200	5.029	PK
6		*	5750.645	119.050	113.863	N/A	N/A	5.187	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:46
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5745MHz (Beam-Forming Mode)	

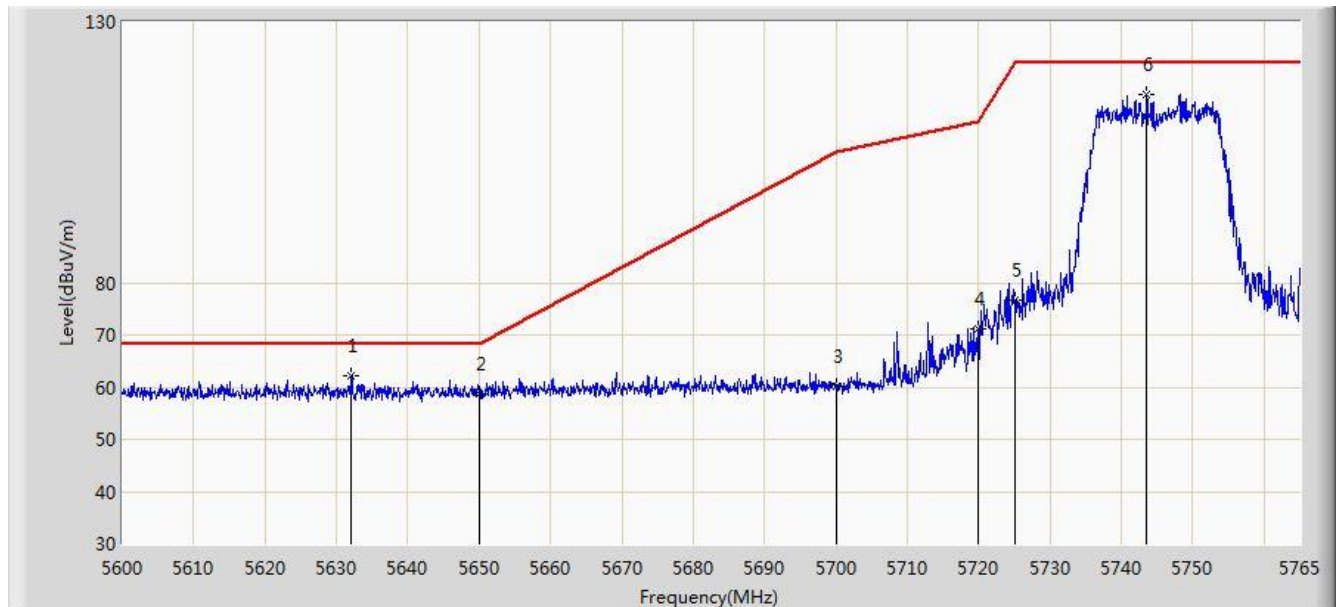


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.092	62.256	57.641	-5.944	68.200	4.615	PK
2			5650.000	58.612	53.941	-9.588	68.200	4.671	PK
3			5700.000	60.090	55.212	-45.110	105.200	4.878	PK
4			5720.000	71.097	66.100	-39.703	110.800	4.997	PK
5			5725.000	76.766	71.737	-45.434	122.200	5.029	PK
6			5743.550	116.145	110.998	N/A	N/A	5.147	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:50
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5825MHz (Beam-Forming Mode)	

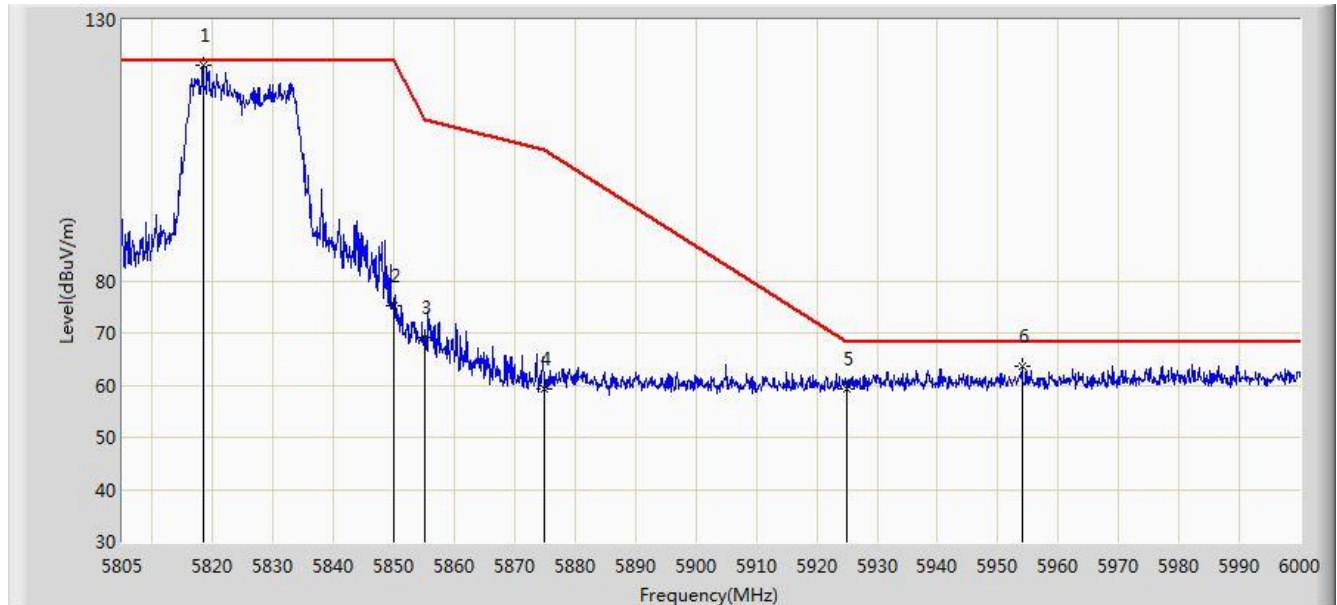


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.357	121.433	115.884	N/A	N/A	5.549	PK
2			5850.000	75.334	69.608	-46.866	122.200	5.726	PK
3			5855.000	69.034	63.288	-41.766	110.800	5.746	PK
4			5875.000	59.165	53.345	-46.035	105.200	5.820	PK
5			5925.000	59.319	53.353	-8.881	68.200	5.967	PK
6			5953.980	63.707	57.674	-4.493	68.200	6.034	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:52
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at Channel 5825MHz (Beam-Forming Mode)	

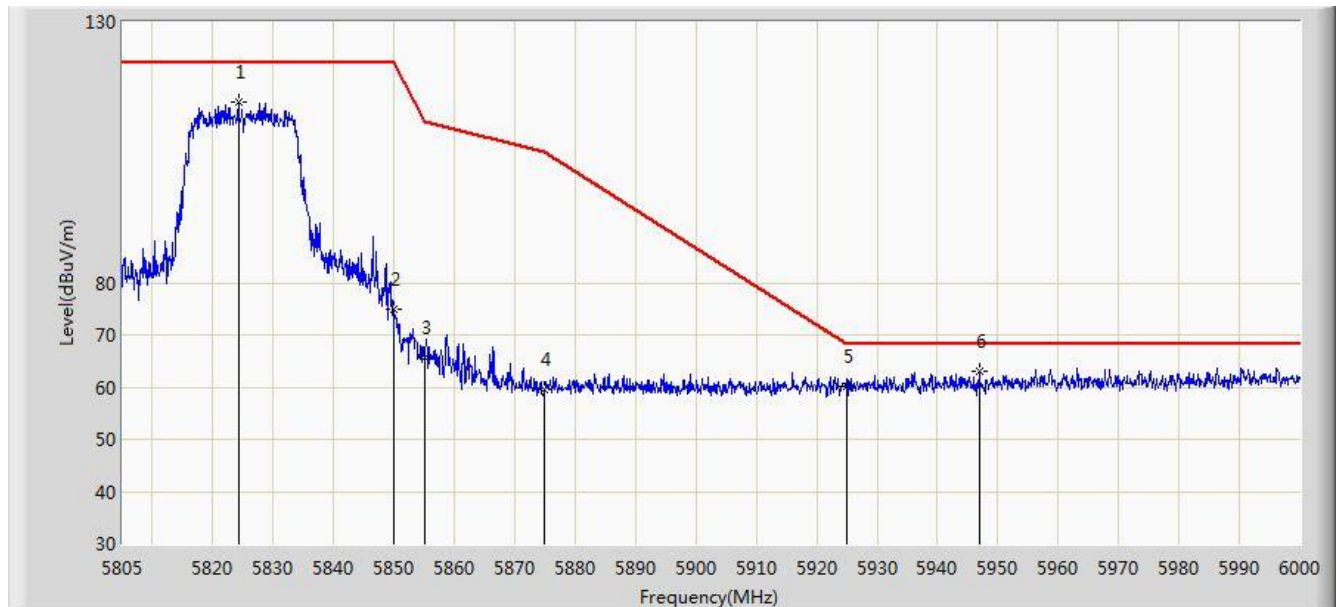


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5824.208	114.685	109.102	N/A	N/A	5.584	PK
2			5850.000	74.784	69.058	-47.416	122.200	5.726	PK
3			5855.000	65.700	59.954	-45.100	110.800	5.746	PK
4			5875.000	59.432	53.612	-45.768	105.200	5.820	PK
5			5925.000	60.085	54.119	-8.115	68.200	5.967	PK
6		*	5946.862	63.170	57.150	-5.030	68.200	6.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5190MHz (Beam-Forming Mode)	

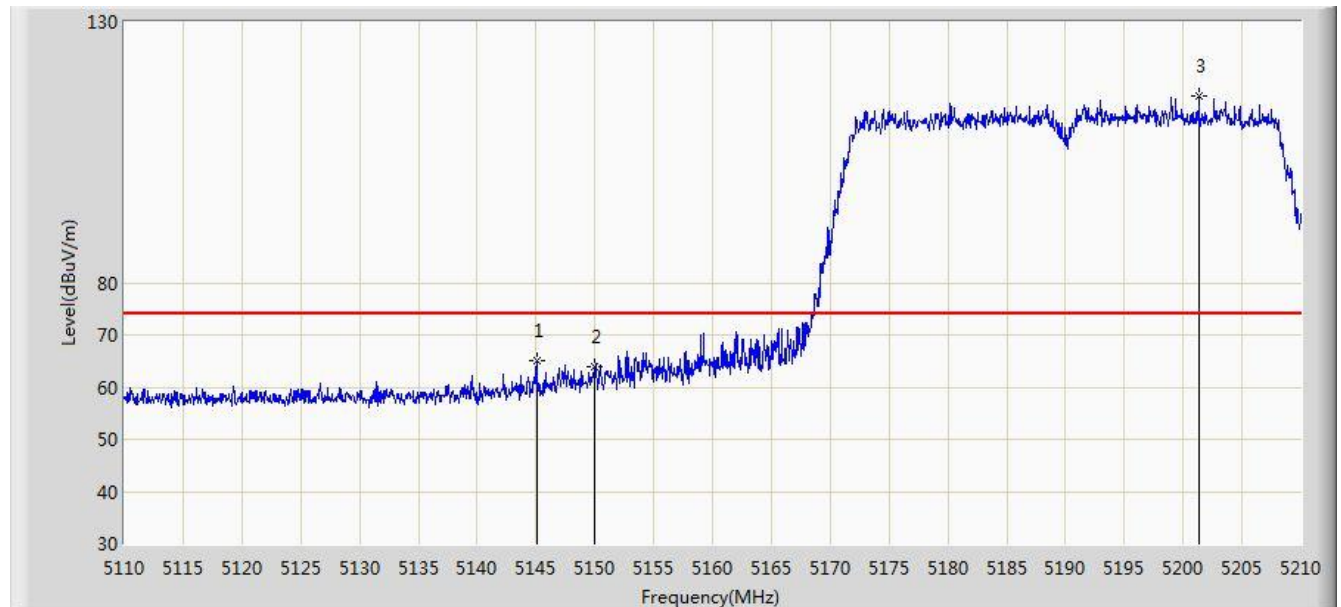


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.050	64.967	60.791	-9.033	74.000	4.176	PK
2			5150.000	63.795	59.626	-10.205	74.000	4.170	PK
3		*	5201.350	115.890	111.896	N/A	N/A	3.994	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5190MHz (Beam-Forming Mode)	

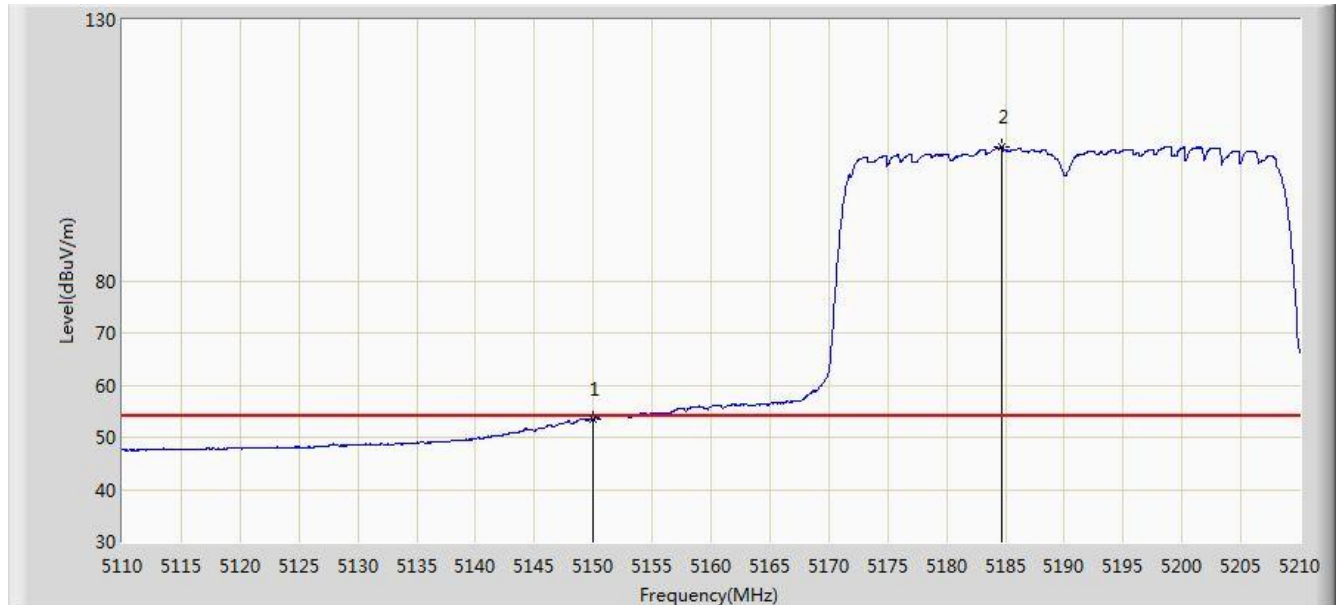


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.487	49.318	-0.513	54.000	4.170	AV
2		*	5184.650	105.621	101.569	N/A	N/A	4.053	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5190MHz (Beam-Forming Mode)	

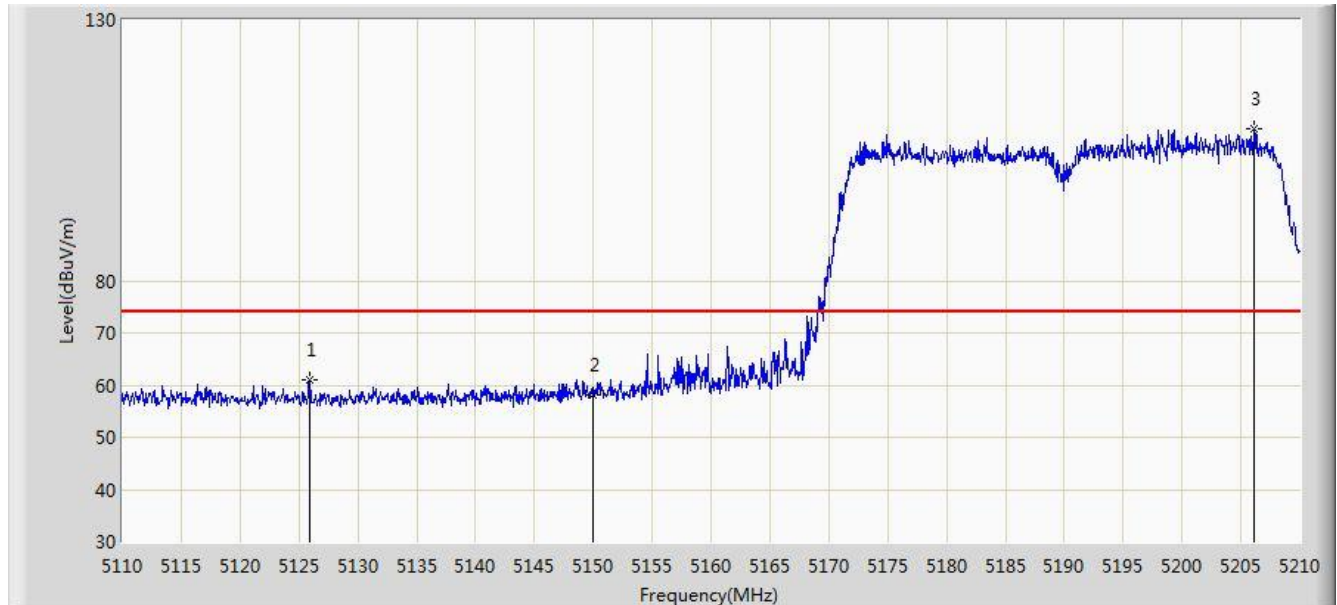


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5125.900	61.086	56.911	-12.914	74.000	4.175	PK
2			5150.000	58.121	53.952	-15.879	74.000	4.170	PK
3		*	5206.100	109.236	105.256	N/A	N/A	3.980	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5190MHz (Beam-Forming Mode)	

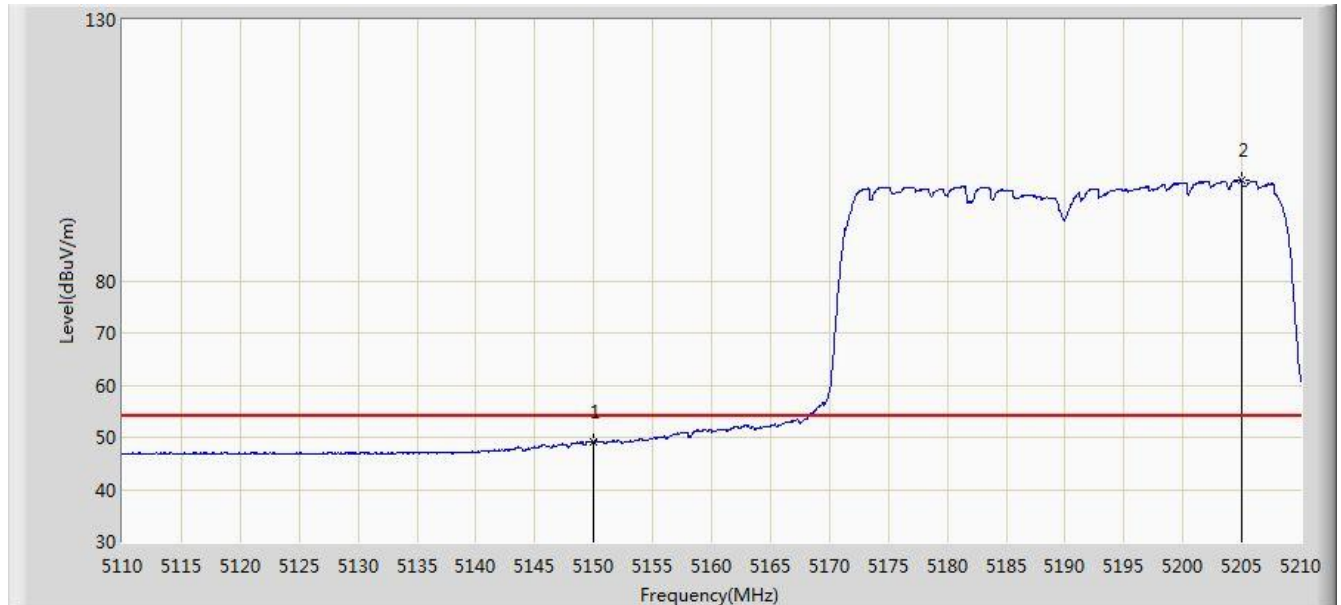


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.138	44.969	-4.862	54.000	4.170	AV
2		*	5204.950	99.254	95.270	N/A	N/A	3.983	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5230MHz (Beam-Forming Mode)	

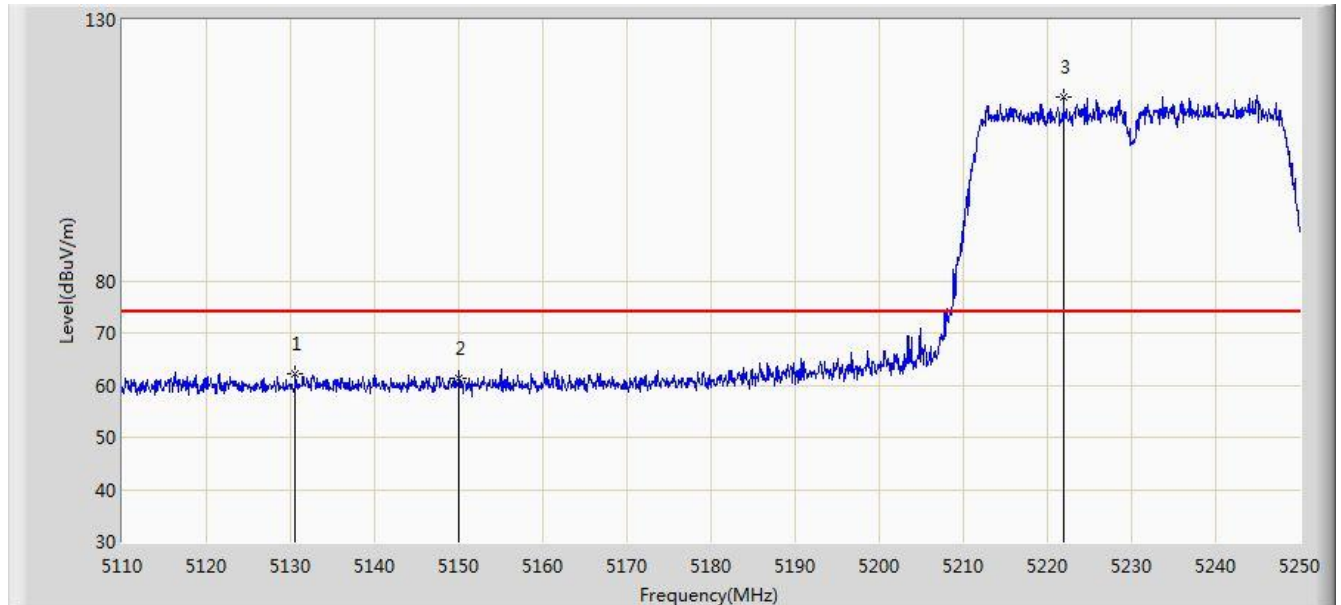


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.580	62.195	58.020	-11.805	74.000	4.174	PK
2			5150.000	61.340	57.171	-12.660	74.000	4.170	PK
3		*	5221.930	115.080	111.147	N/A	N/A	3.933	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5230MHz (Beam-Forming Mode)	

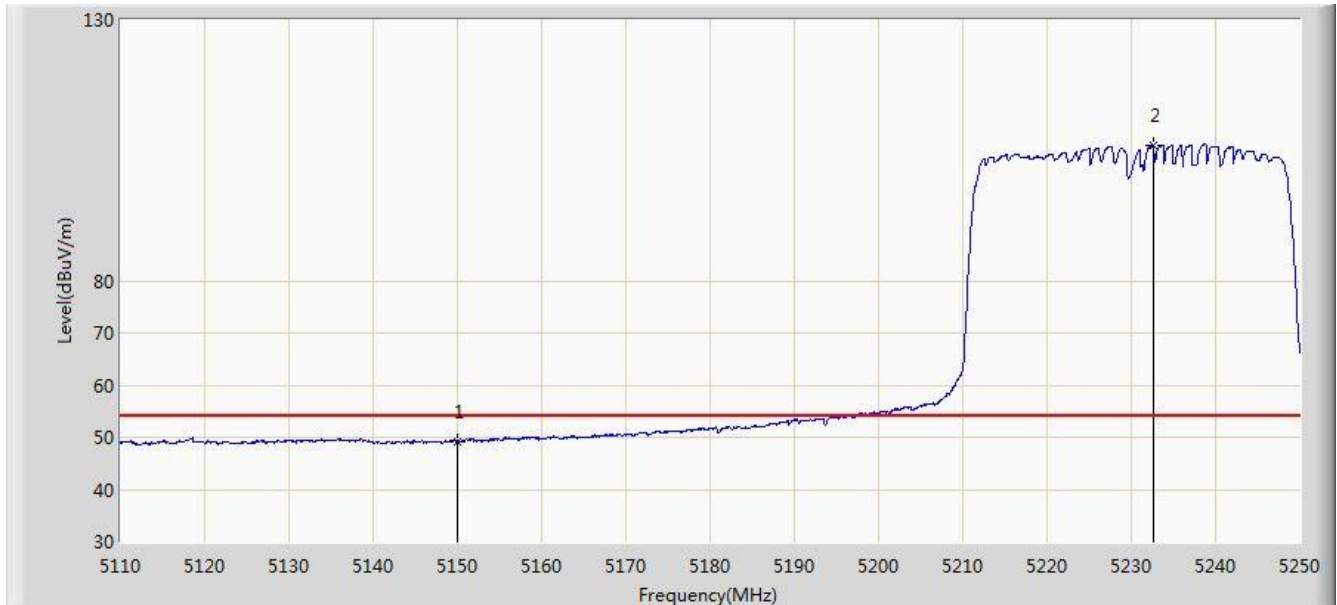


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.256	45.087	-4.744	54.000	4.170	AV
2		*	5232.710	105.933	102.032	N/A	N/A	3.902	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5230MHz (Beam-Forming Mode)	

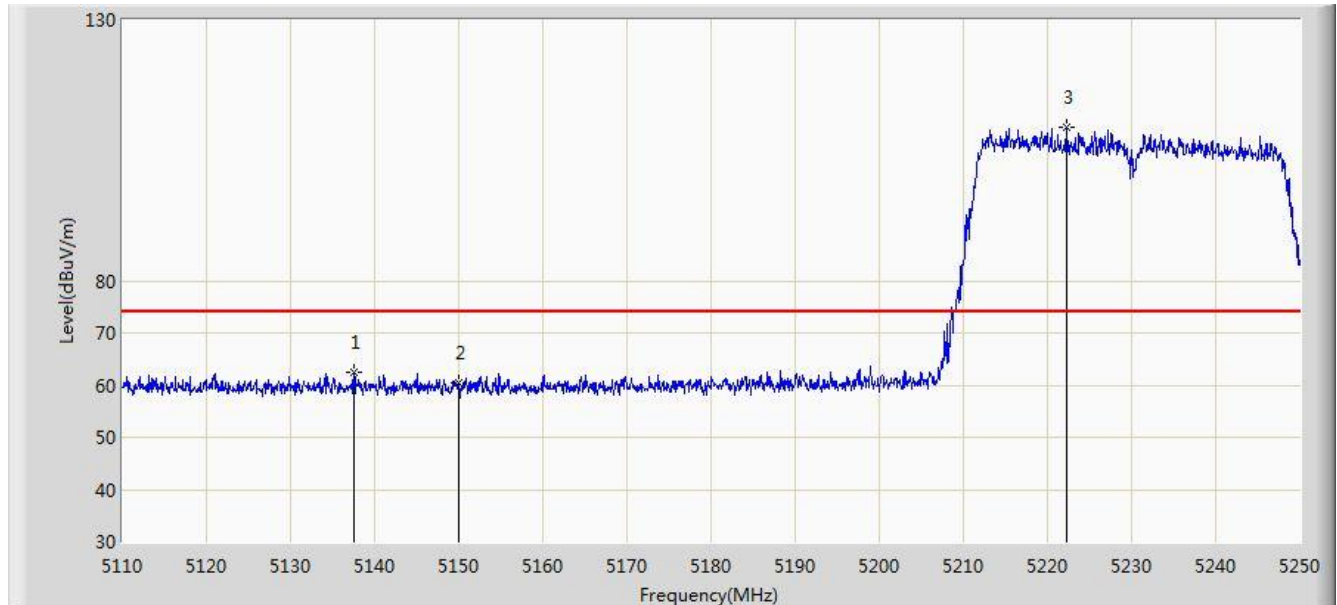


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.580	62.583	58.408	-11.417	74.000	4.175	PK
2			5150.000	60.319	56.150	-13.681	74.000	4.170	PK
3		*	5222.280	109.301	105.369	N/A	N/A	3.932	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5230MHz (Beam-Forming Mode)	

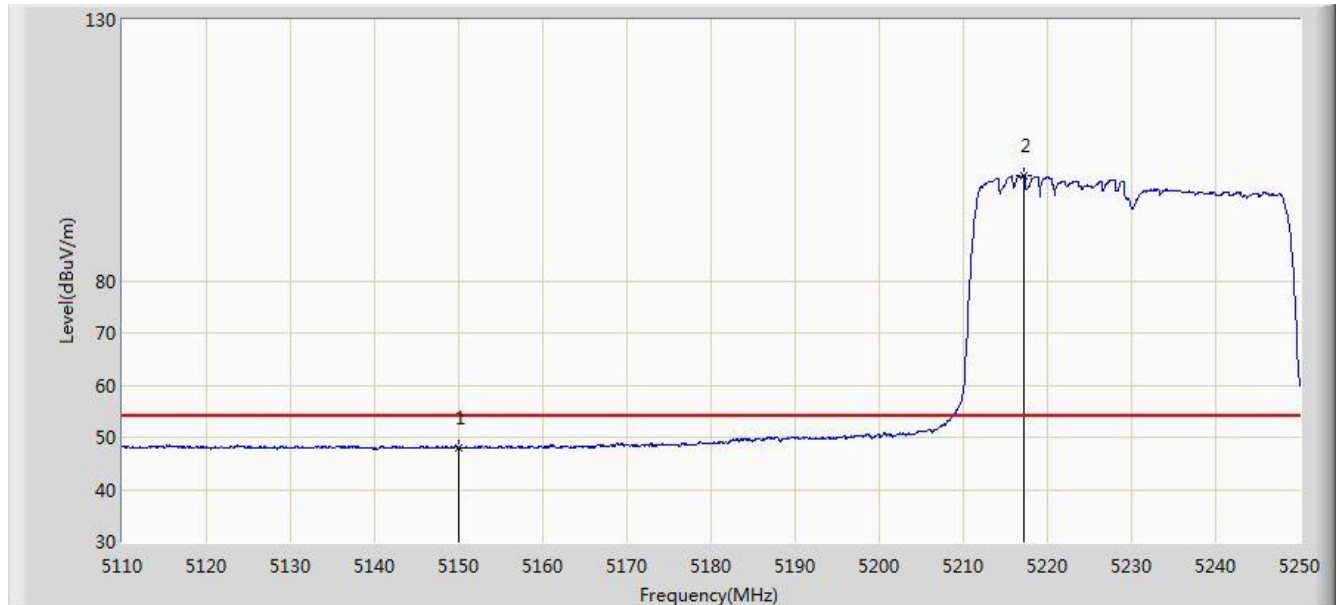


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.892	43.723	-6.108	54.000	4.170	AV
2		*	5217.240	100.055	96.108	N/A	N/A	3.947	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5510MHz (Beam-Forming Mode)	

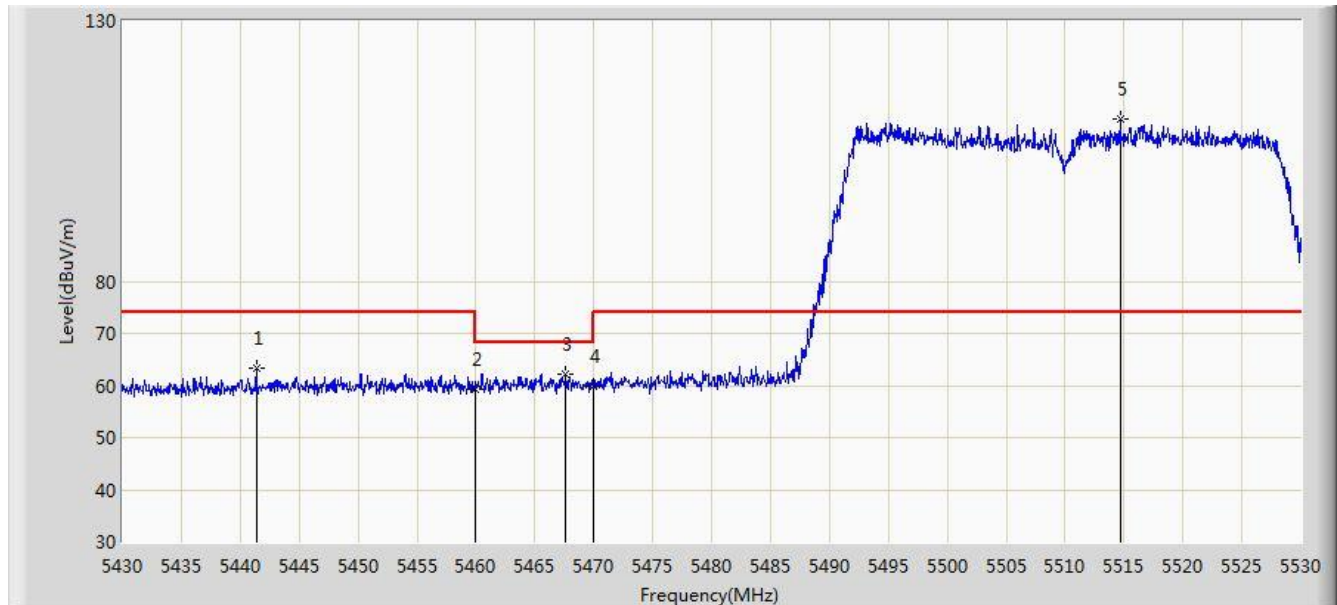


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.350	63.239	59.111	-10.761	74.000	4.128	PK
2			5460.000	59.285	55.105	-14.715	74.000	4.180	PK
3			5467.600	62.168	57.971	-6.032	68.200	4.197	PK
4			5470.000	59.902	55.700	-8.298	68.200	4.202	PK
5		*	5514.650	111.273	106.958	N/A	N/A	4.316	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5510MHz (Beam-Forming Mode)	

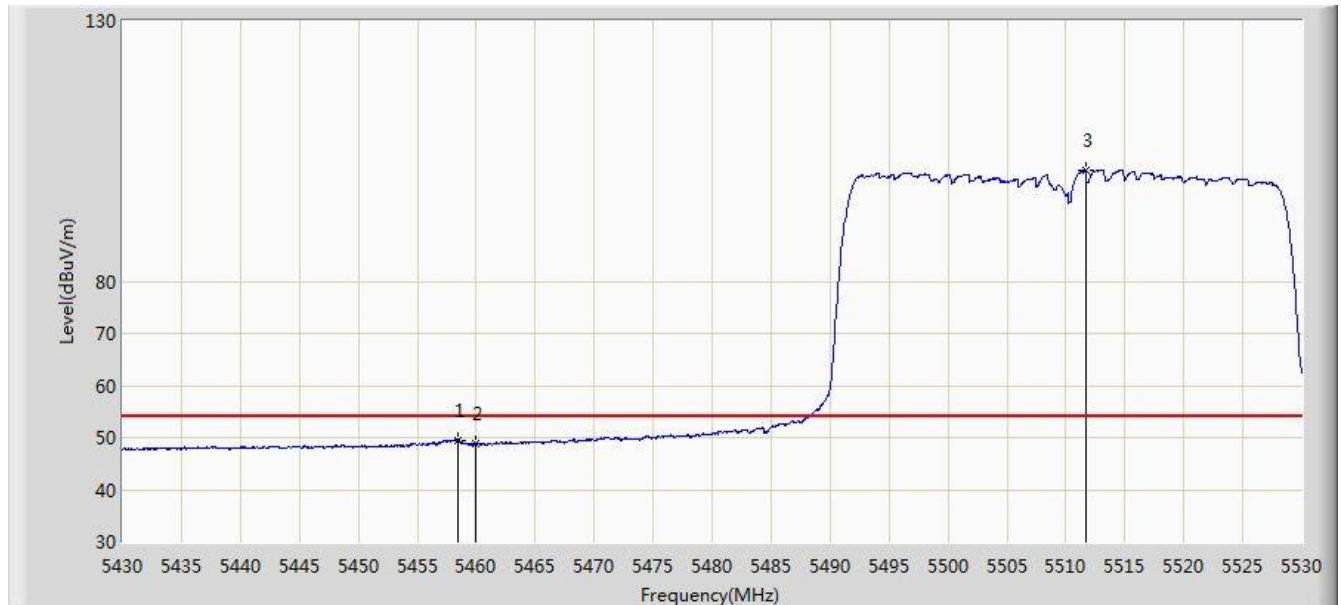


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.400	49.507	45.330	-4.493	54.000	4.177	AV
2			5460.000	48.829	44.649	-5.171	54.000	4.180	AV
3		*	5511.650	101.325	97.019	N/A	N/A	4.306	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5510MHz (Beam-Forming Mode)	

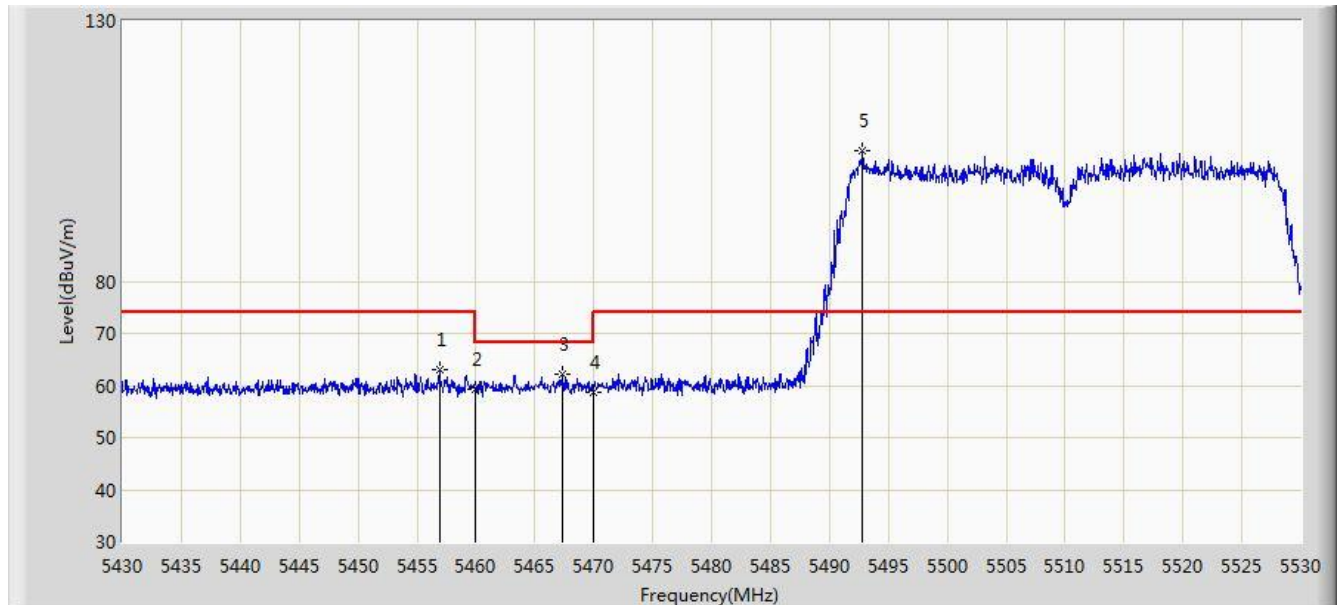


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.950	63.009	58.835	-10.991	74.000	4.173	PK
2			5460.000	59.308	55.128	-14.692	74.000	4.180	PK
3			5467.350	62.167	57.971	-6.033	68.200	4.196	PK
4			5470.000	58.820	54.618	-9.380	68.200	4.202	PK
5		*	5492.800	105.119	100.865	N/A	N/A	4.254	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 19:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5510MHz (Beam-Forming Mode)	

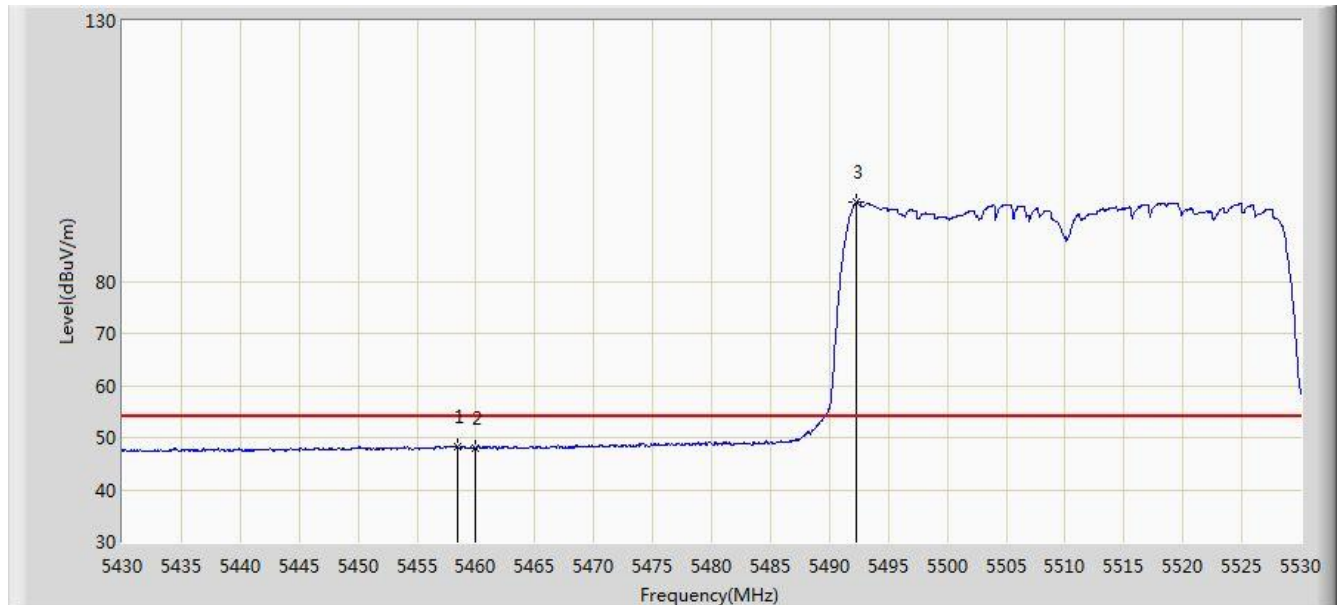


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.400	48.206	44.029	-5.794	54.000	4.177	AV
2			5460.000	48.010	43.830	-5.990	54.000	4.180	AV
3		*	5492.300	95.134	90.881	N/A	N/A	4.253	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:13
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5755MHz (Beam-Forming Mode)	

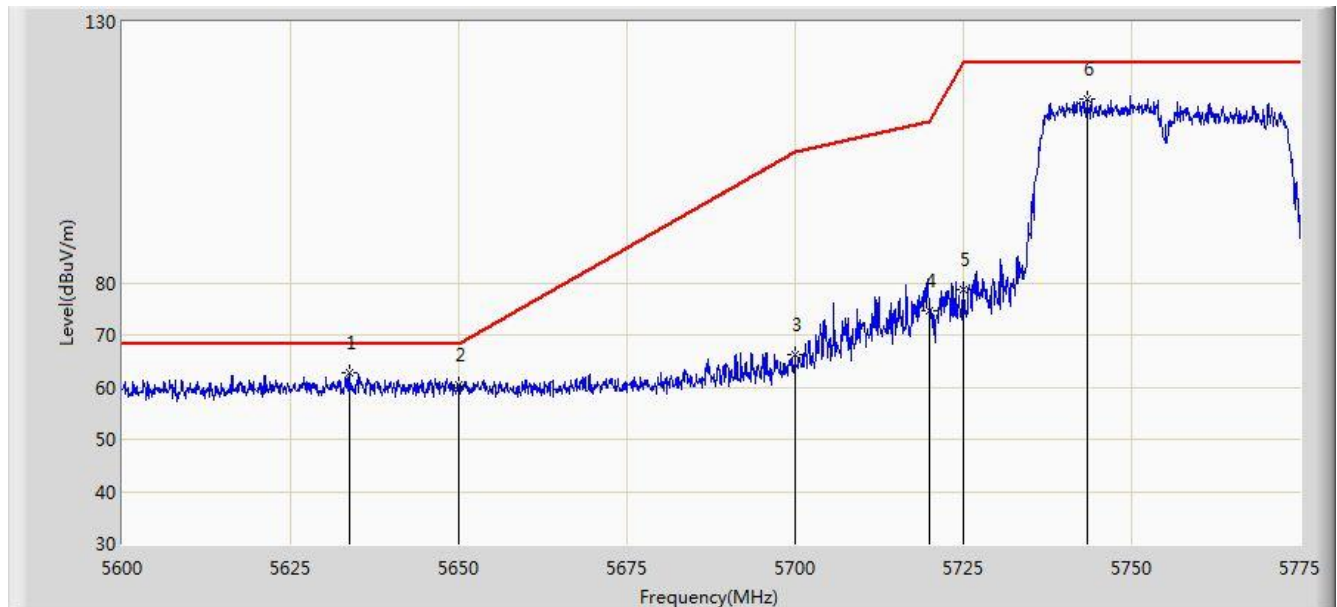


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.687	62.698	58.078	-5.502	68.200	4.620	PK
2			5650.000	60.297	55.626	-7.903	68.200	4.671	PK
3			5700.000	66.247	61.369	-38.953	105.200	4.878	PK
4			5720.000	74.686	69.689	-36.114	110.800	4.997	PK
5			5725.000	78.731	73.702	-43.469	122.200	5.029	PK
6			5743.413	115.311	110.165	N/A	N/A	5.145	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:12
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5755MHz (Beam-Forming Mode)	

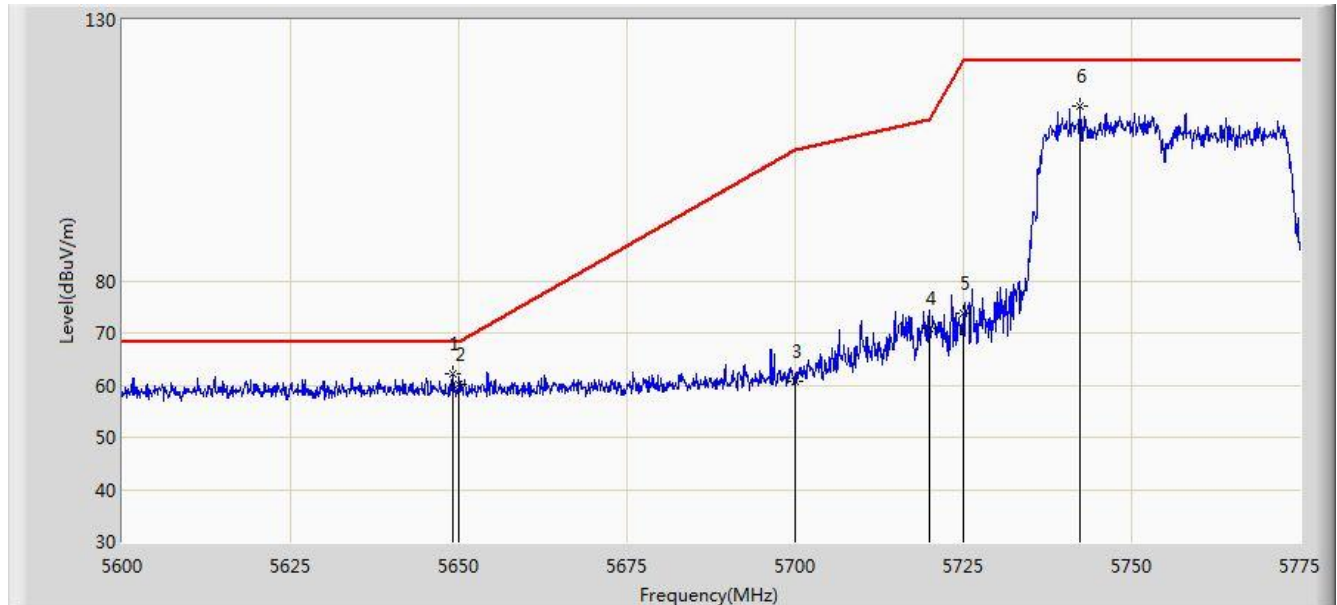


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5649.087	62.161	57.493	-6.039	68.200	4.668	PK
2			5650.000	60.257	55.586	-7.943	68.200	4.671	PK
3			5700.000	60.805	55.927	-44.395	105.200	4.878	PK
4			5720.000	70.901	65.904	-39.899	110.800	4.997	PK
5			5725.000	73.890	68.861	-48.310	122.200	5.029	PK
6			5742.275	113.428	108.289	N/A	N/A	5.139	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:24
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5795MHz (Beam-Forming Mode)	

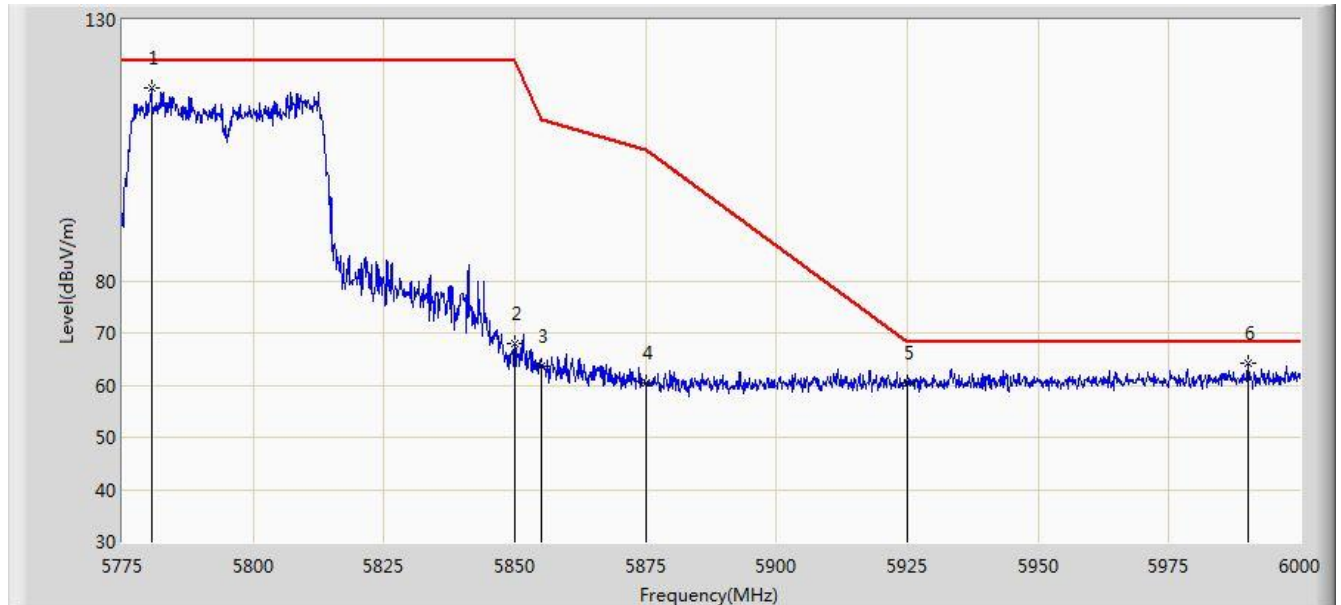


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5780.513	116.917	111.573	N/A	N/A	5.344	PK
2			5850.000	67.831	62.105	-54.369	122.200	5.726	PK
3			5855.000	63.610	57.864	-47.190	110.800	5.746	PK
4			5875.000	60.430	54.610	-44.770	105.200	5.820	PK
5			5925.000	60.576	54.610	-7.624	68.200	5.967	PK
6		*	5990.100	64.124	58.030	-4.076	68.200	6.094	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 20:22
Limit: FCC_Part15.407_RE(3m)_Bandedge	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at Channel 5795MHz (Beam-Forming Mode)	

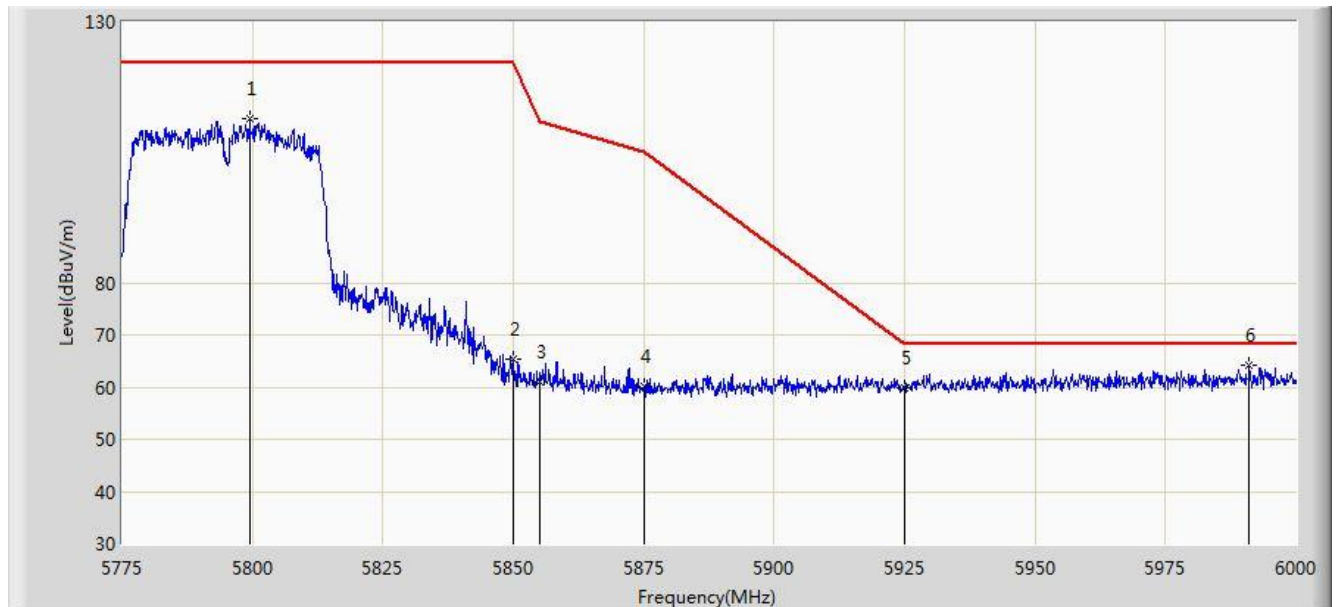


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5799.525	111.518	106.076	N/A	N/A	5.443	PK
2			5850.000	65.301	59.575	-56.899	122.200	5.726	PK
3			5855.000	60.872	55.126	-49.928	110.800	5.746	PK
4			5875.000	60.042	54.222	-45.158	105.200	5.820	PK
5			5925.000	59.968	54.002	-8.232	68.200	5.967	PK
6		*	5991.112	64.189	58.093	-4.011	68.200	6.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at Channel 5210MHz (Beam-Forming Mode)	

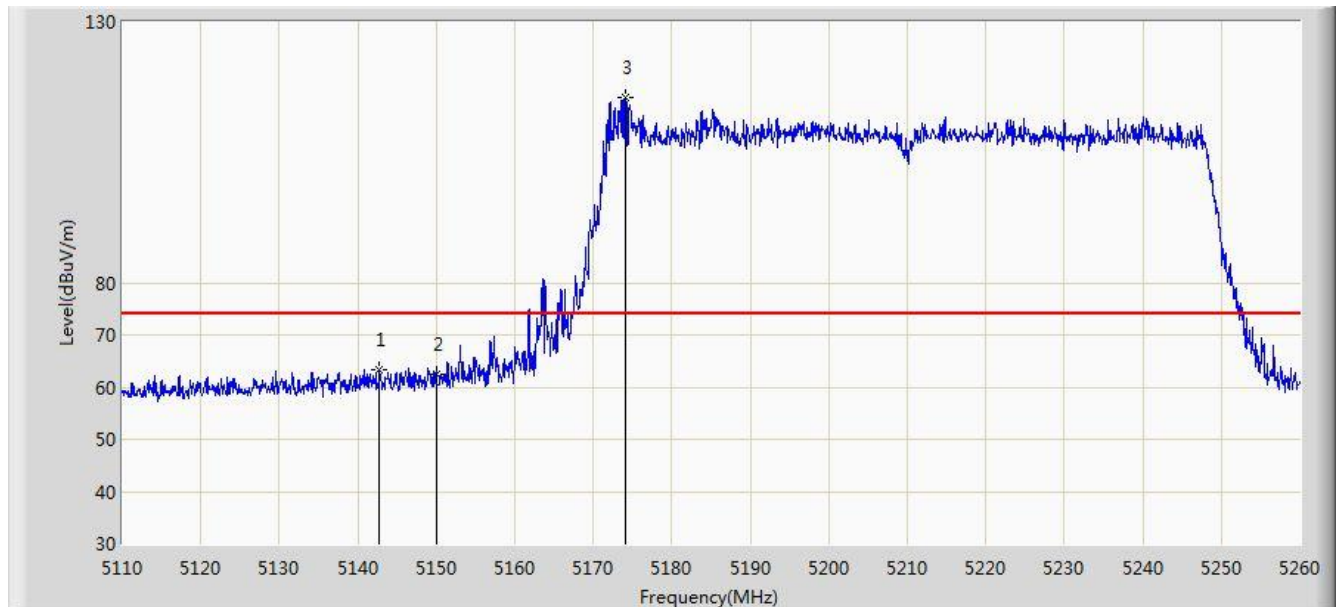


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.700	63.455	59.279	-10.545	74.000	4.176	PK
2			5150.000	62.531	58.362	-11.469	74.000	4.170	PK
3		*	5174.050	115.366	111.276	N/A	N/A	4.090	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 17:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at Channel 5210MHz (Beam-Forming Mode)	

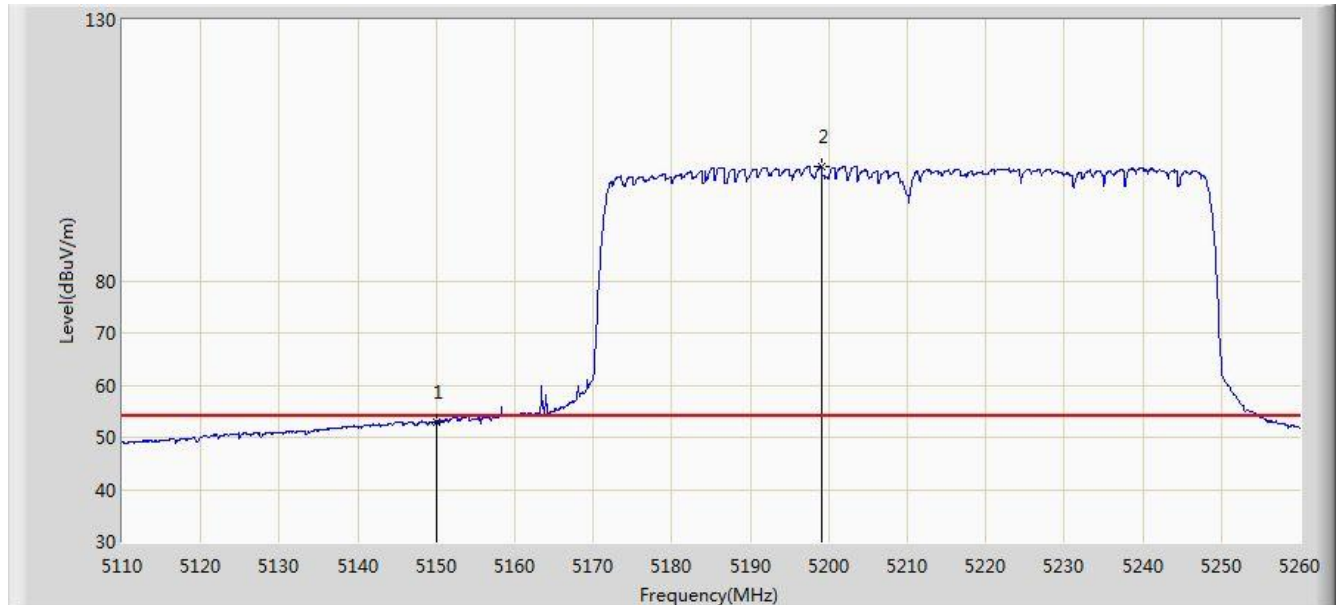


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.967	48.798	-1.033	54.000	4.170	AV
2		*	5199.025	101.984	97.983	N/A	N/A	4.002	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at Channel 5210MHz (Beam-Forming Mode)	

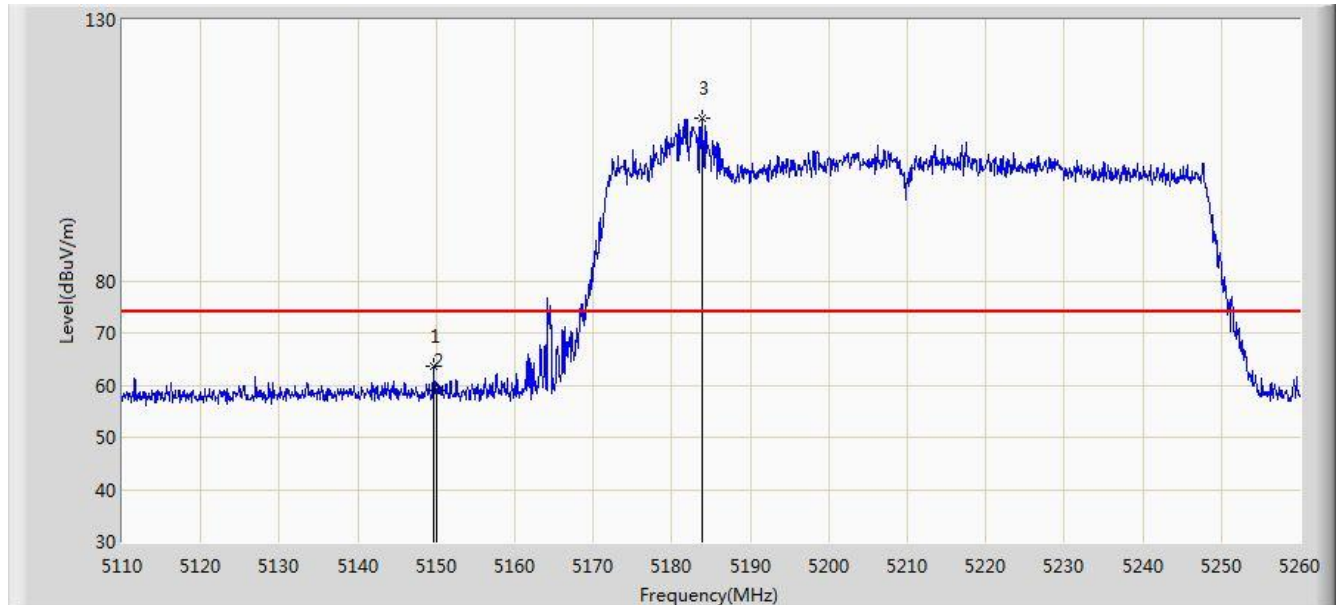


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.675	63.517	59.347	-10.483	74.000	4.170	PK
2			5150.000	59.056	54.887	-14.944	74.000	4.170	PK
3		*	5183.875	111.186	107.131	N/A	N/A	4.056	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/11/29 - 18:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX11000 MU-MIMO Tri-Band Gaming Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at Channel 5210MHz (Beam-Forming Mode)	

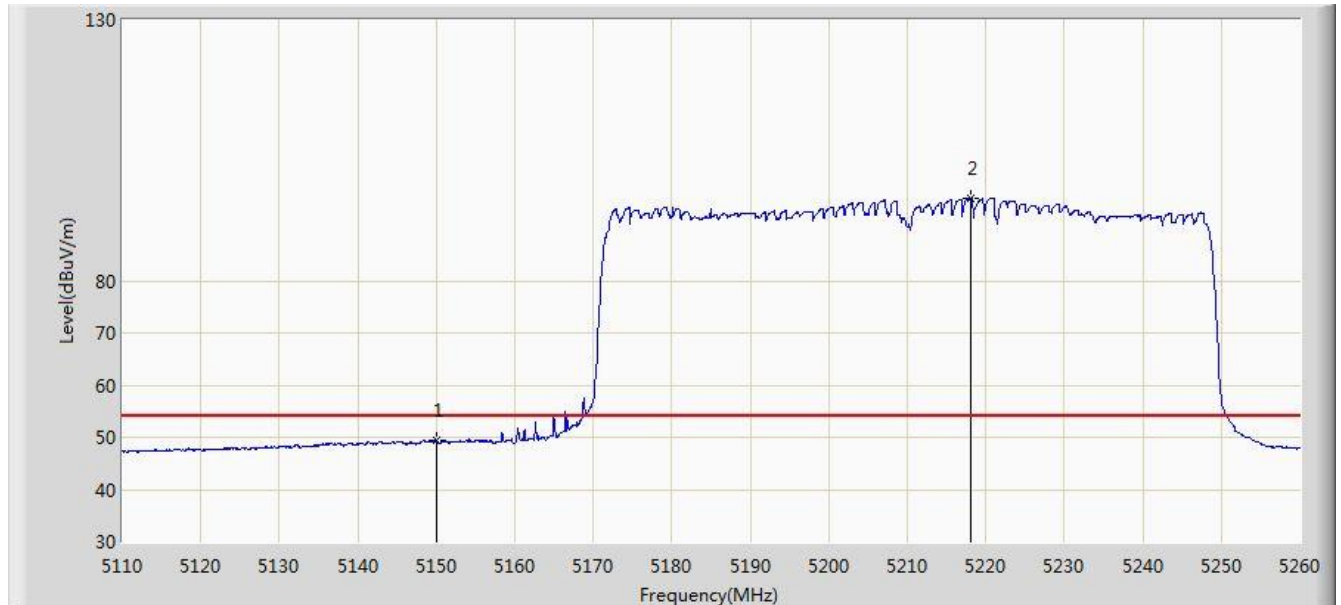

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.343	45.174	-4.657	54.000	4.170	AV
2		*	5218.150	95.726	91.782	N/A	N/A	3.944	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)