


EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/56%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz – CDD mode	Test Voltage	120V/60Hz

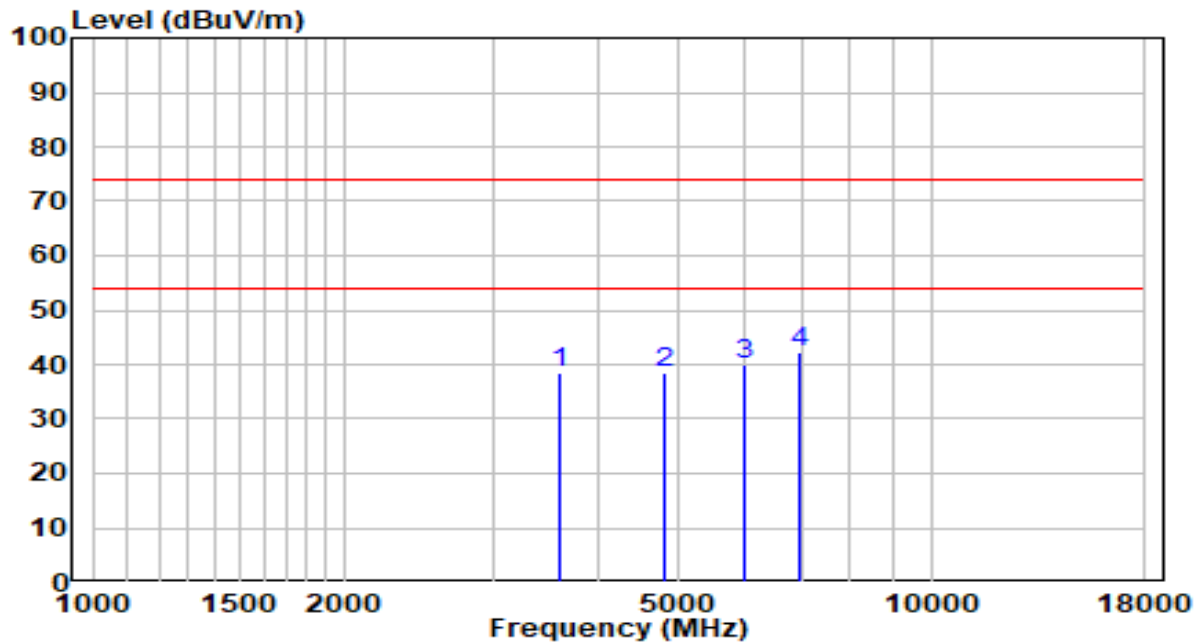


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3618.000	38.81	-0.43	38.38	-35.62	74.00	Peak
2	4825.000	35.05	3.33	38.38	-35.62	74.00	Peak
3	5998.000	34.10	5.88	39.99	-34.01	74.00	Peak
4	* 6992.500	32.10	10.27	42.37	-31.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2437MHz – CDD mode	Test Voltage	120V/60Hz

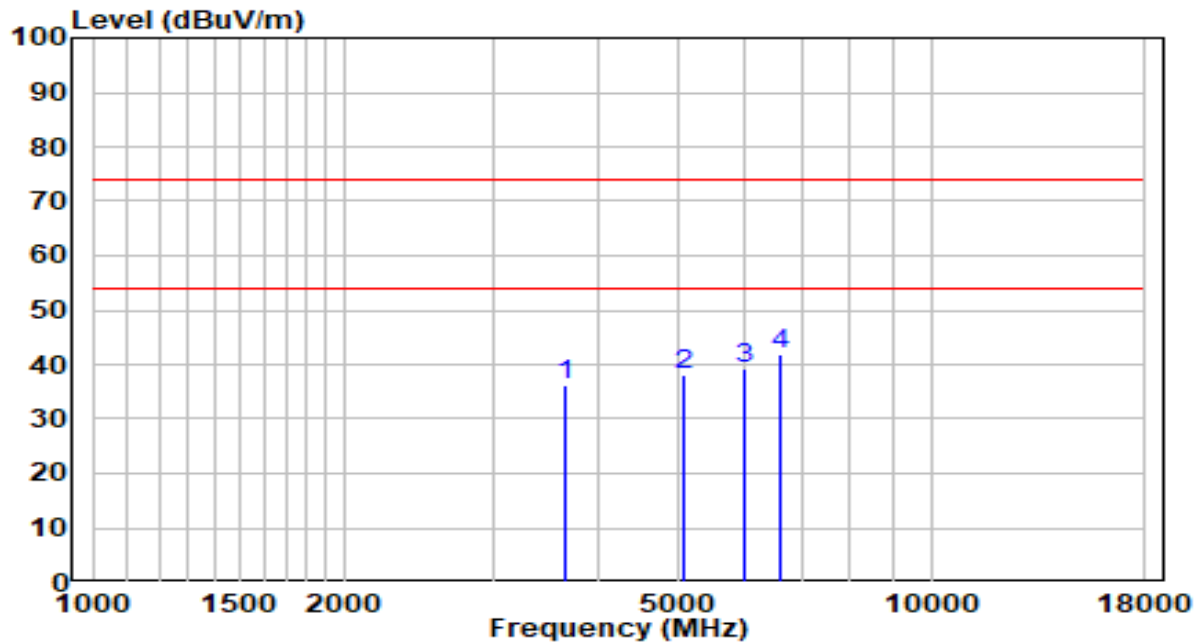


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3652.000	36.53	-0.32	36.21	-37.79	74.00	Peak
2	5080.000	34.19	3.83	38.02	-35.98	74.00	Peak
3	5989.500	33.22	5.86	39.08	-34.92	74.00	Peak
4	* 6627.000	33.17	8.66	41.83	-32.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/56%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11g at channel 2437MHz – CDD mode	Test Voltage	120V/60Hz

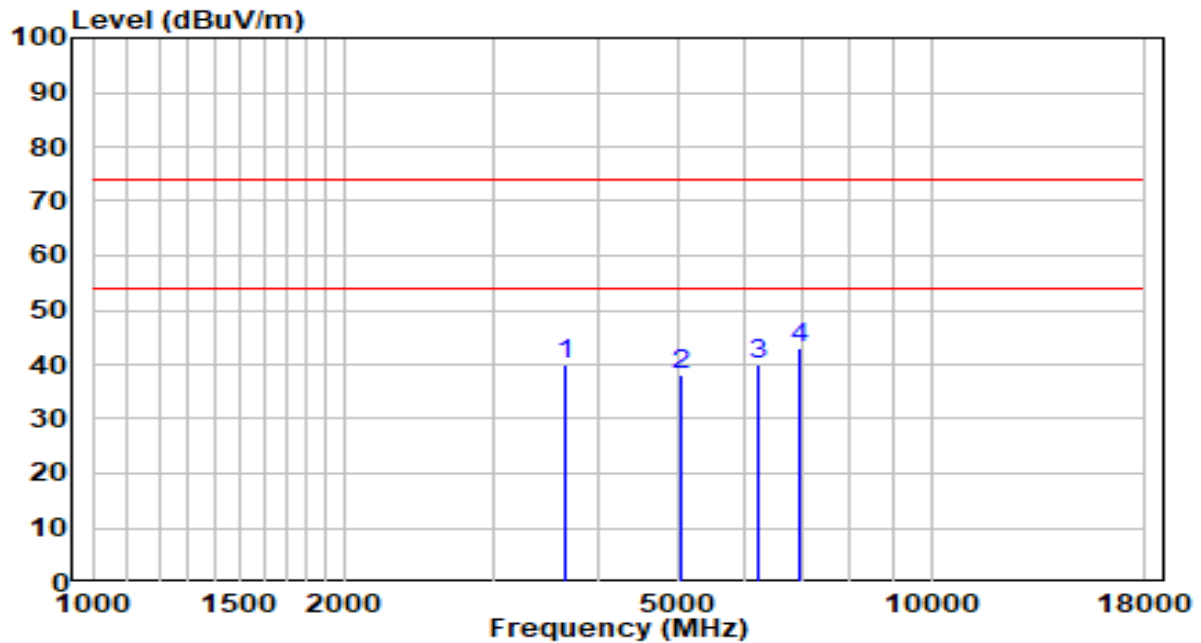


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3652.000	40.26	-0.32	39.94	-34.06	74.00	Peak
2	5037.500	34.36	3.79	38.15	-35.85	74.00	Peak
3	6219.000	33.16	6.86	40.01	-33.99	74.00	Peak
4	* 6958.500	32.99	10.12	43.11	-30.89	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/56%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz – CDD mode	Test Voltage	120V/60Hz

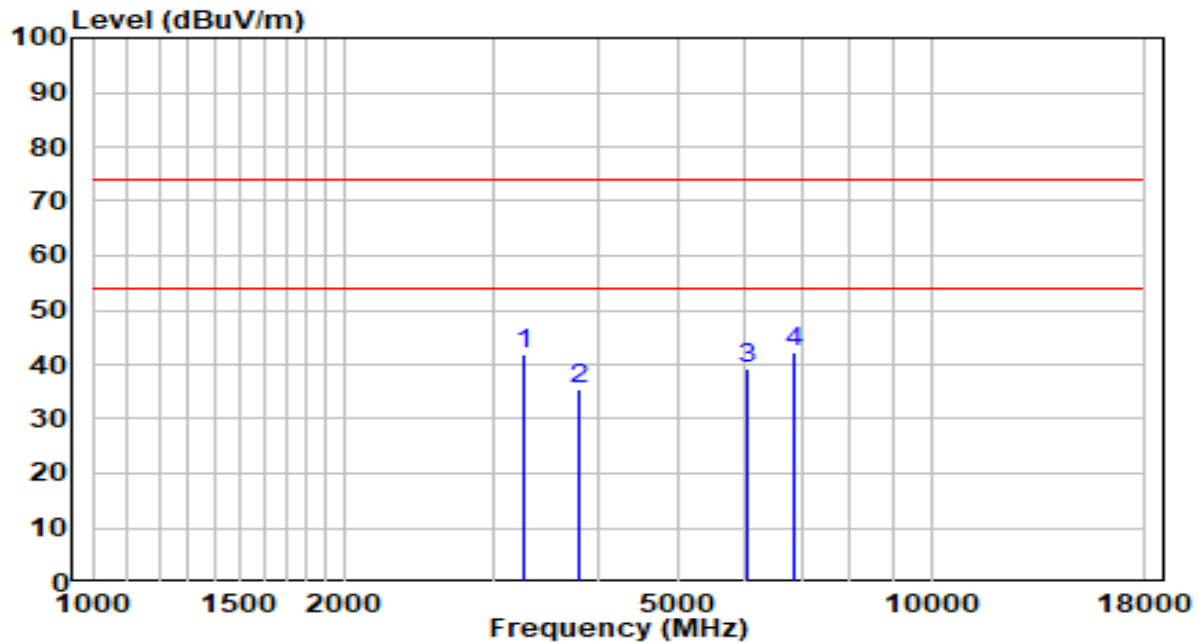


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	3261.000	43.57	-1.65	41.92	-32.08	74.00	Peak
2	3796.500	35.25	0.18	35.43	-38.57	74.00	Peak
3	6032.000	33.36	6.03	39.39	-34.61	74.00	Peak
4	* 6856.500	32.51	9.67	42.17	-31.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23°C/56%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz – CDD mode	Test Voltage	120V/60Hz

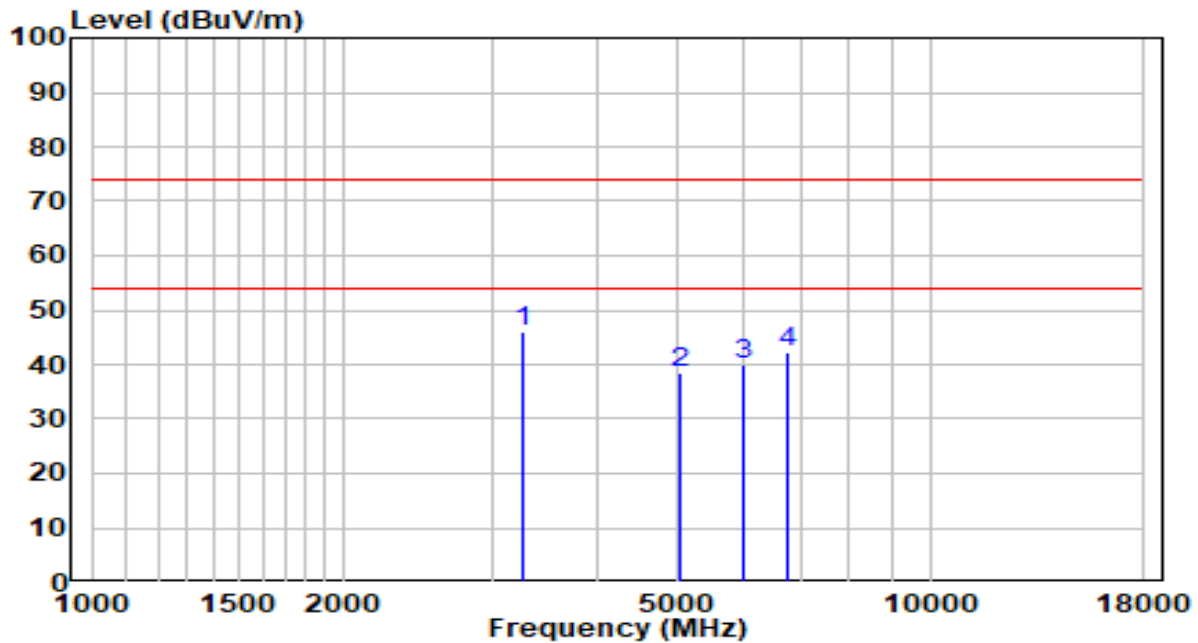


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	3261.000	47.50	-1.65	45.85	-28.15	74.00	Peak
2		5029.000	34.59	3.78	38.37	-35.63	74.00	Peak
3		5989.500	34.13	5.86	39.99	-34.01	74.00	Peak
4		6771.500	32.88	9.29	42.17	-31.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-08
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.3°C/48%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 2437MHz – Beamforming Mode	Test Voltage	120V/60Hz

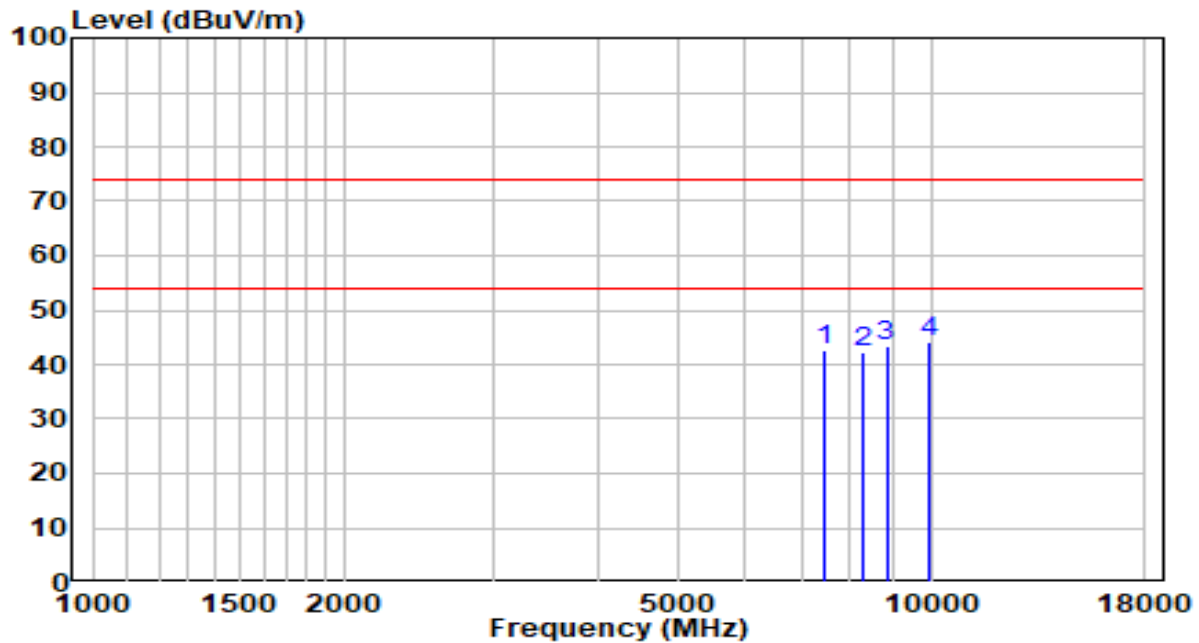


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	30.93	11.55	42.48	-31.52	74.00	Peak
2	8284.500	29.72	12.49	42.21	-31.79	74.00	Peak
3	8845.500	30.07	13.30	43.37	-30.63	74.00	Peak
4	* 9950.500	28.91	15.27	44.18	-29.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-08
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.3°C/48%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 2437MHz – Beamforming Mode	Test Voltage	120V/60Hz

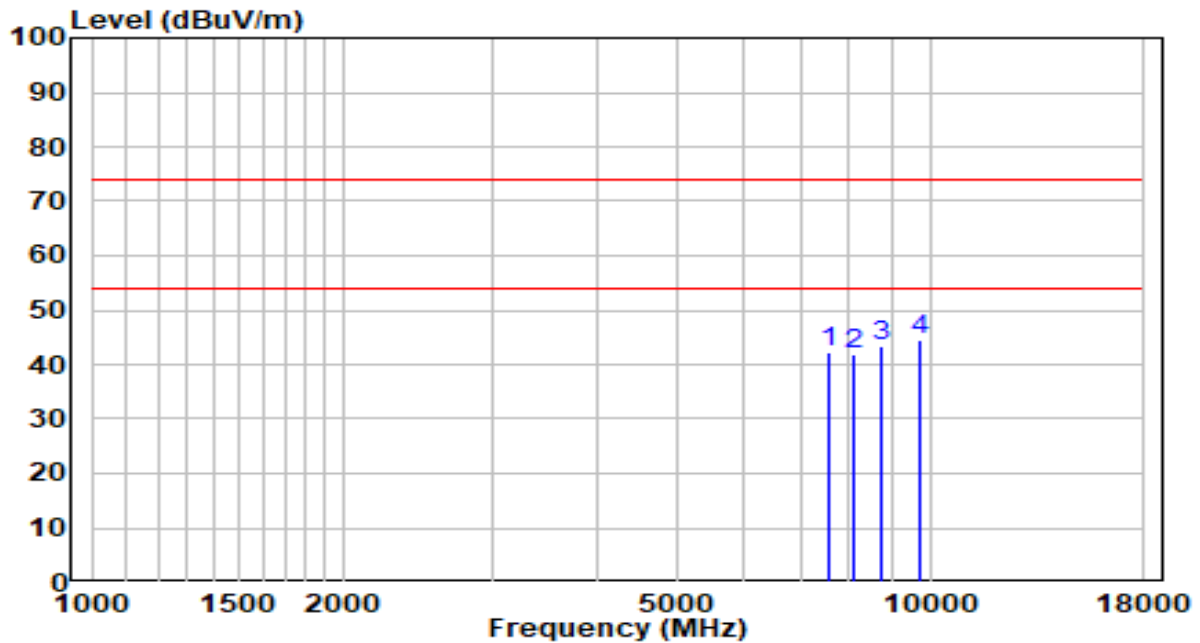

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	30.49	11.82	42.30	-31.70	74.00	Peak
2	8106.000	29.41	12.51	41.93	-32.07	74.00	Peak
3	8769.000	30.12	13.11	43.24	-30.76	74.00	Peak
4	* 9712.500	29.70	14.82	44.52	-29.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4.Test Setup

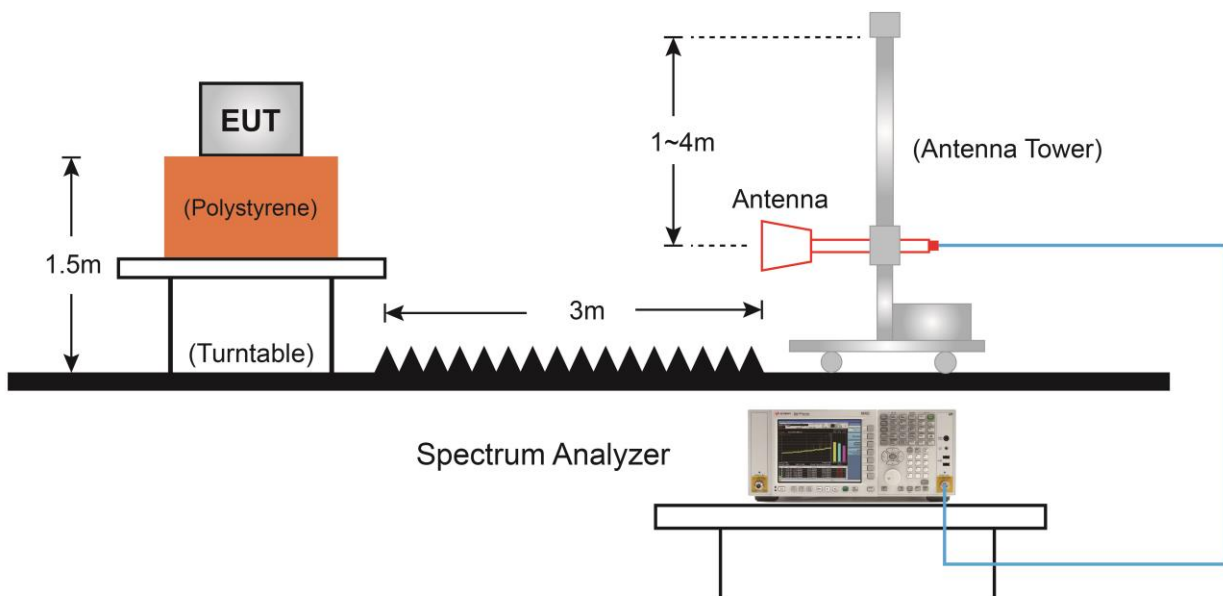

7.7.5. Test Result

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

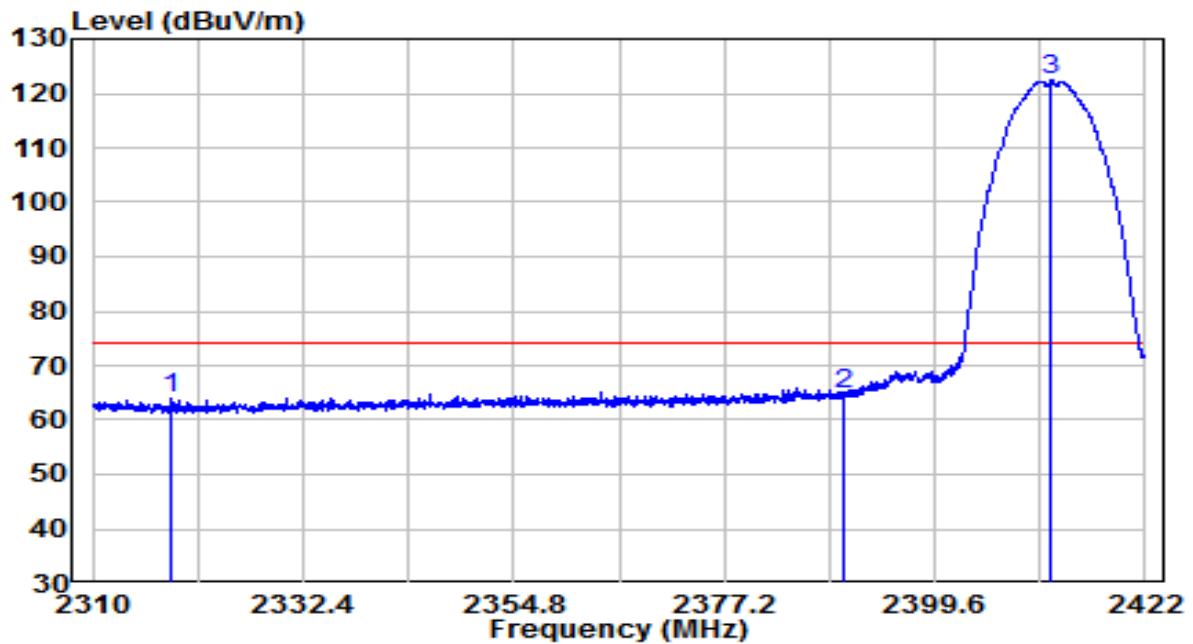


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2318.344	31.88	31.94	63.83	-10.17	74.00	Peak
2	2390.000	32.47	32.27	64.75	-9.25	74.00	Peak
3	* 2411.920	89.95	32.37	122.32	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

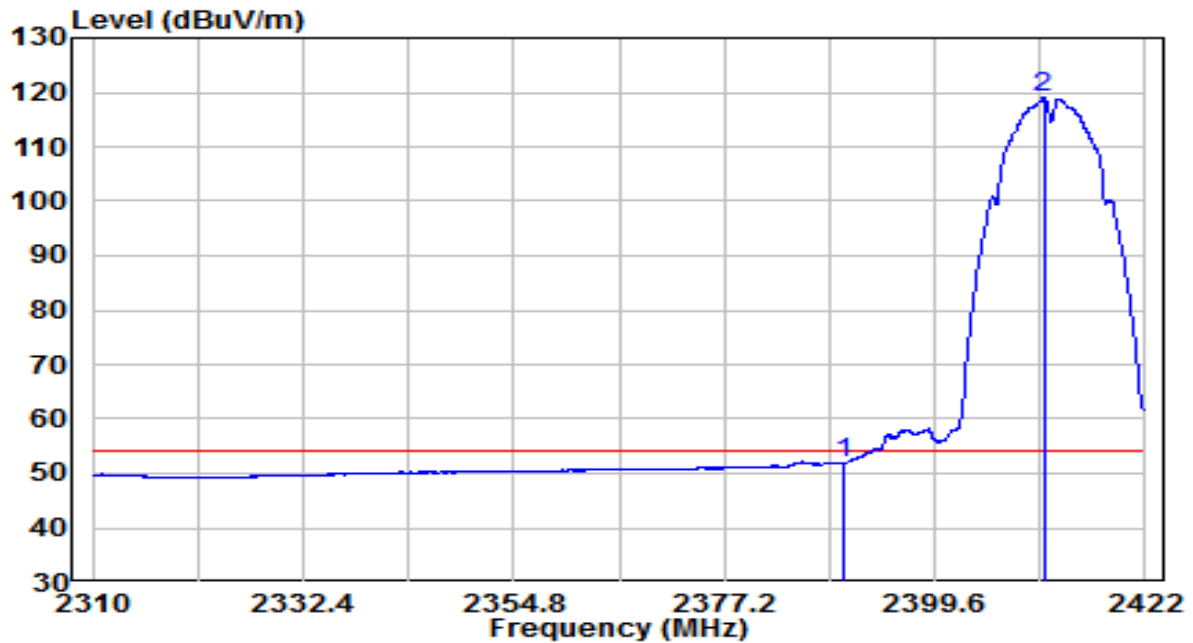


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.024	19.77	32.27	52.04	-1.96	54.00	Average
2	* 2411.192	86.61	32.37	118.99	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

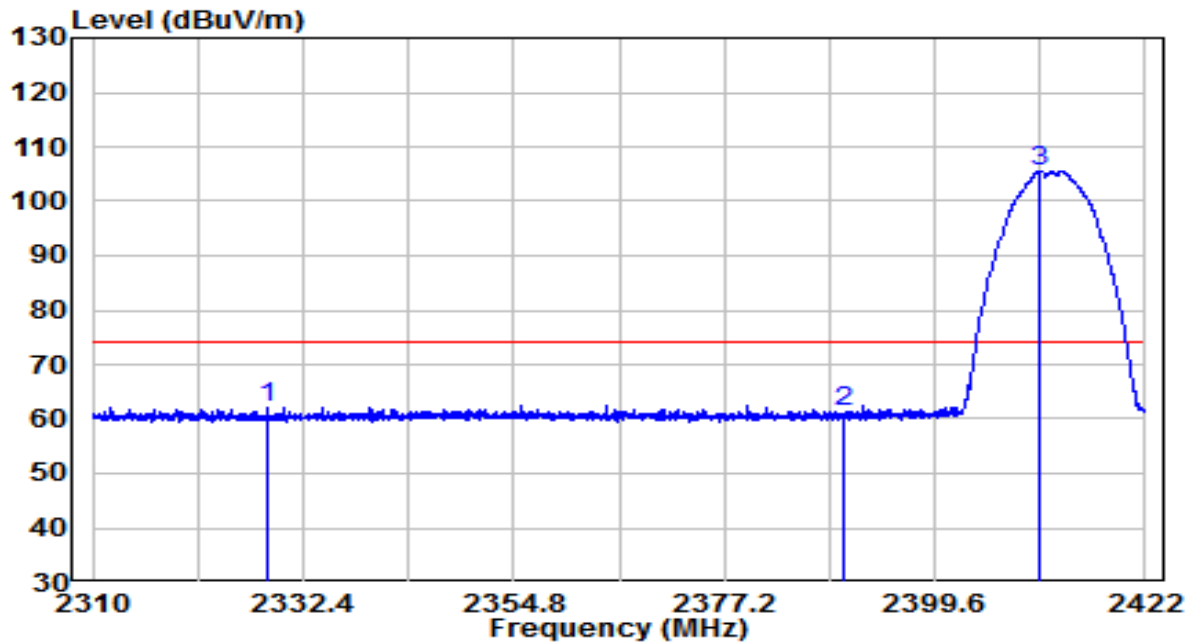


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2328.648	29.95	31.99	61.94	-12.06	74.00	Peak
2	2390.000	29.10	32.27	61.37	-12.63	74.00	Peak
3	*	73.21	32.37	105.57	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

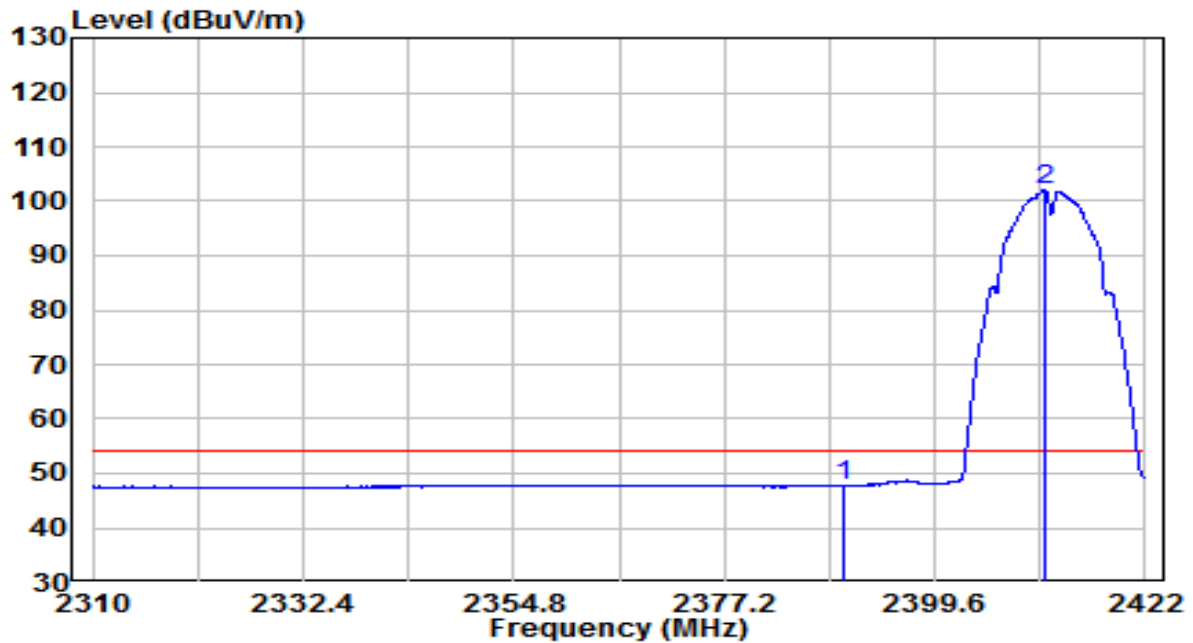


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.024	15.44	32.27	47.72	-6.28	54.00	Average
2	* 2411.304	69.77	32.37	102.14	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

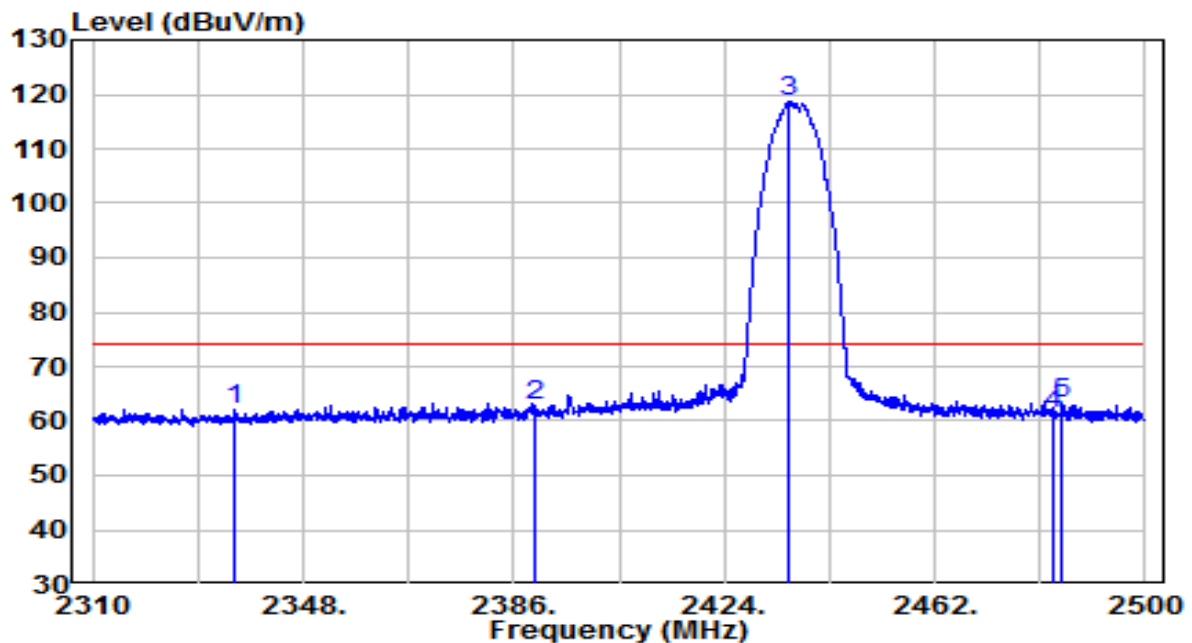


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2335.460	30.19	32.02	62.21	-11.79	74.00	Peak
2	2390.000	30.39	32.27	62.66	-11.34	74.00	Peak
3	* 2435.685	86.06	32.48	118.54	N/A	N/A	Peak
4	2483.500	28.50	32.70	61.20	-12.80	74.00	Peak
5	2485.085	30.46	32.71	63.17	-10.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

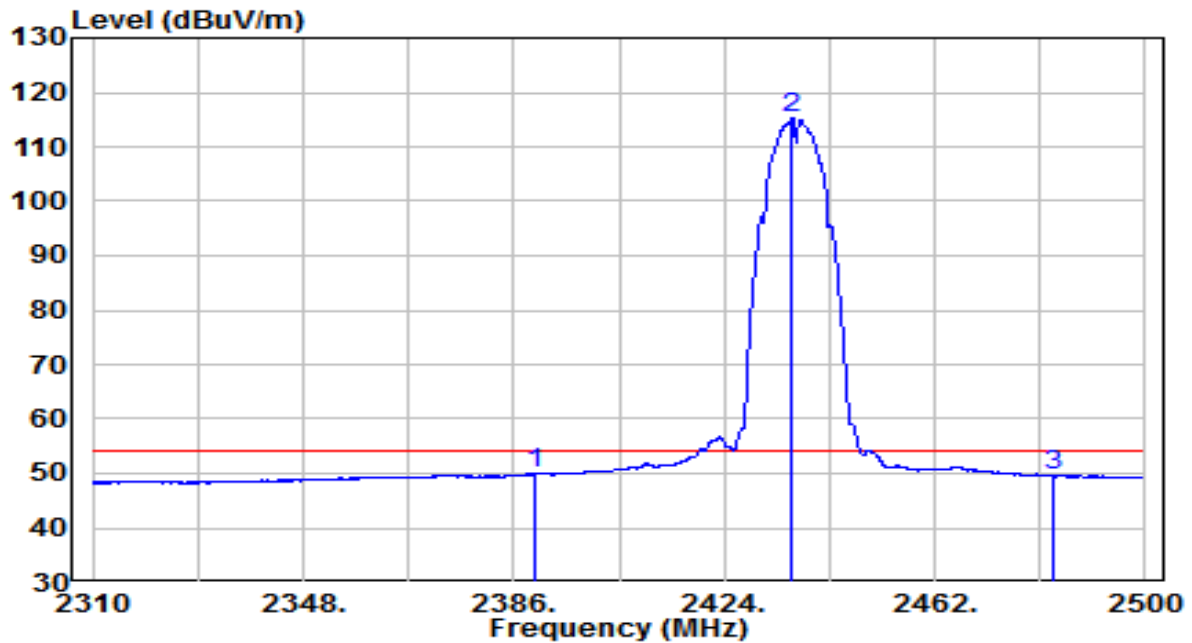


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.990	17.55	32.27	49.83	-4.17	54.00	Average
2	* 2436.255	82.91	32.49	115.40	N/A	N/A	Average
3	2483.500	16.74	32.70	49.44	-4.56	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	tp-link-Archer A3200	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

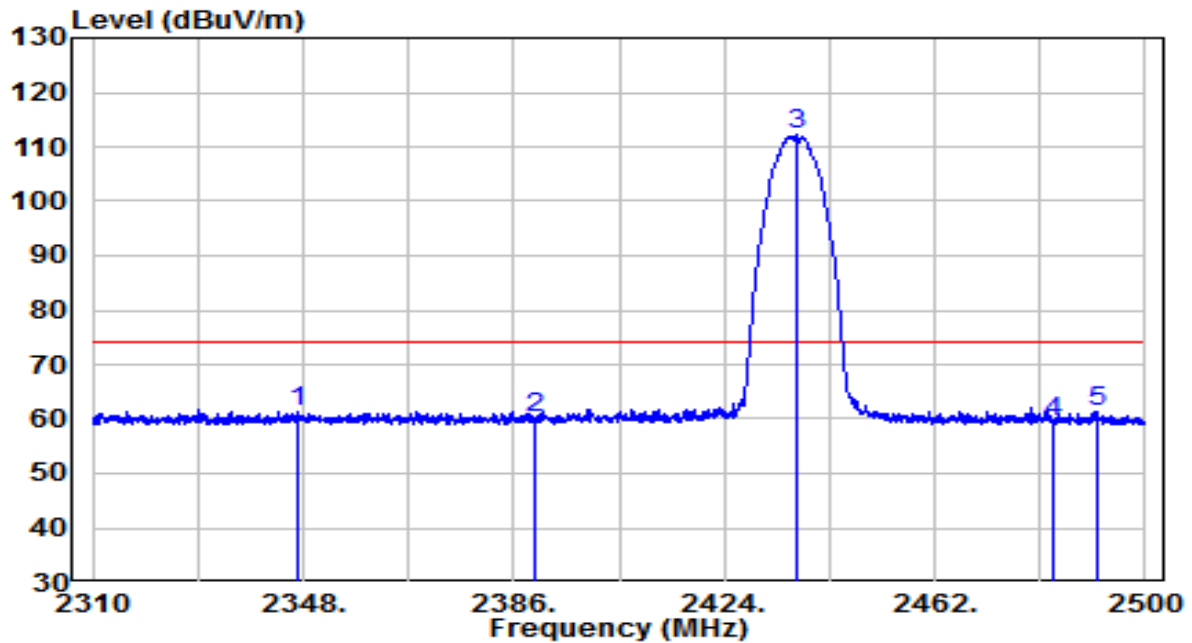


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2346.860	29.26	32.08	61.33	-12.67	74.00	Peak
2	2390.000	27.92	32.27	60.19	-13.81	74.00	Peak
3	* 2437.015	79.60	32.49	112.09	N/A	N/A	Peak
4	2483.500	26.87	32.70	59.57	-14.43	74.00	Peak
5	2491.545	28.47	32.74	61.21	-12.79	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	tp-link-Archer A3200	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

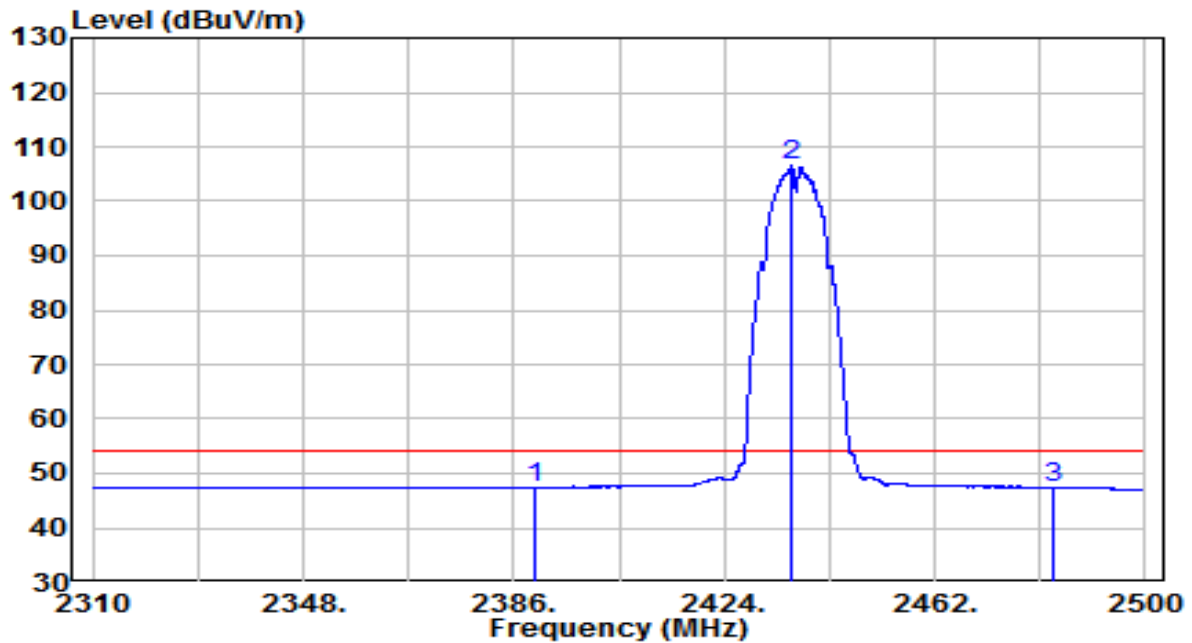


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.15	32.27	47.42	-6.58	54.00	Average
2	* 2436.160	74.01	32.49	106.50	N/A	N/A	Average
3	2483.500	14.70	32.70	47.40	-6.60	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

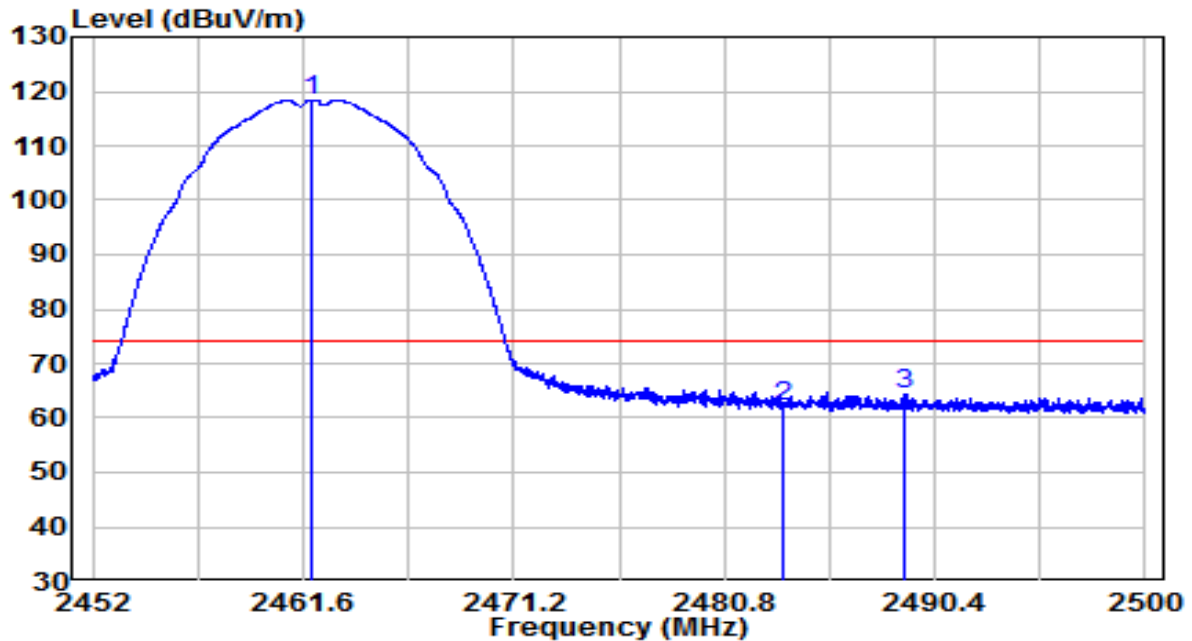


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.032	85.86	32.61	118.47	N/A	N/A	Peak
2		2483.500	29.48	32.70	62.18	-11.82	74.00	Peak
3		2489.056	31.80	32.73	64.53	-9.47	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

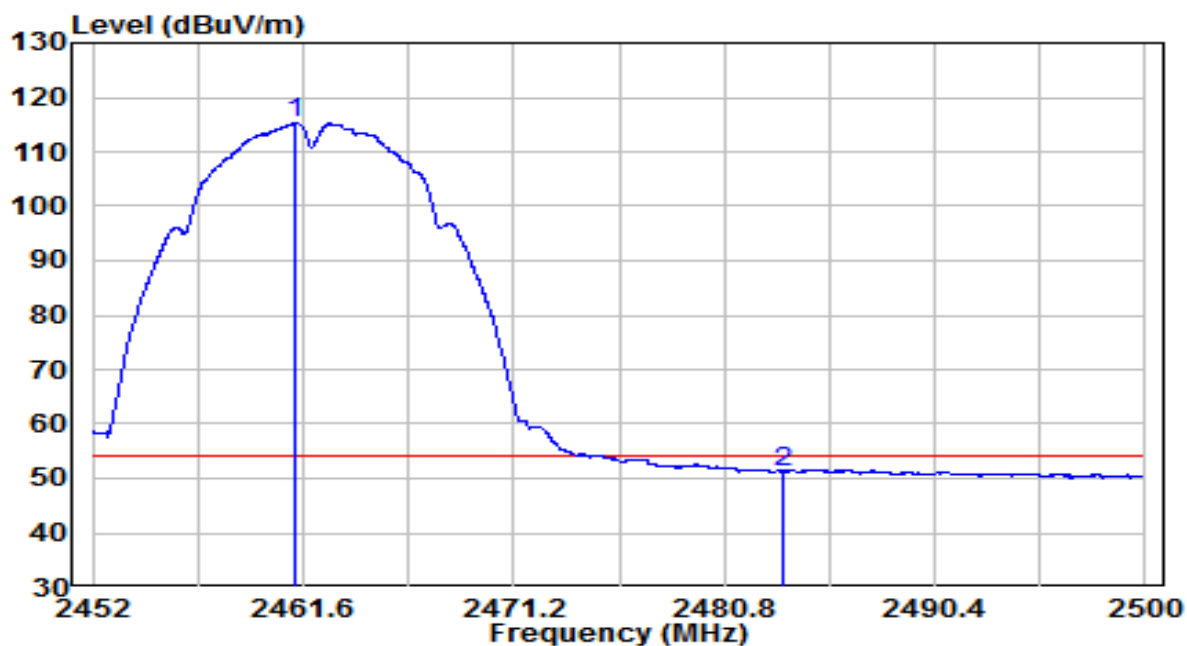


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.192	82.62	32.60	115.23	N/A	N/A	Average
2		2483.500	18.58	32.70	51.28	-2.72	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

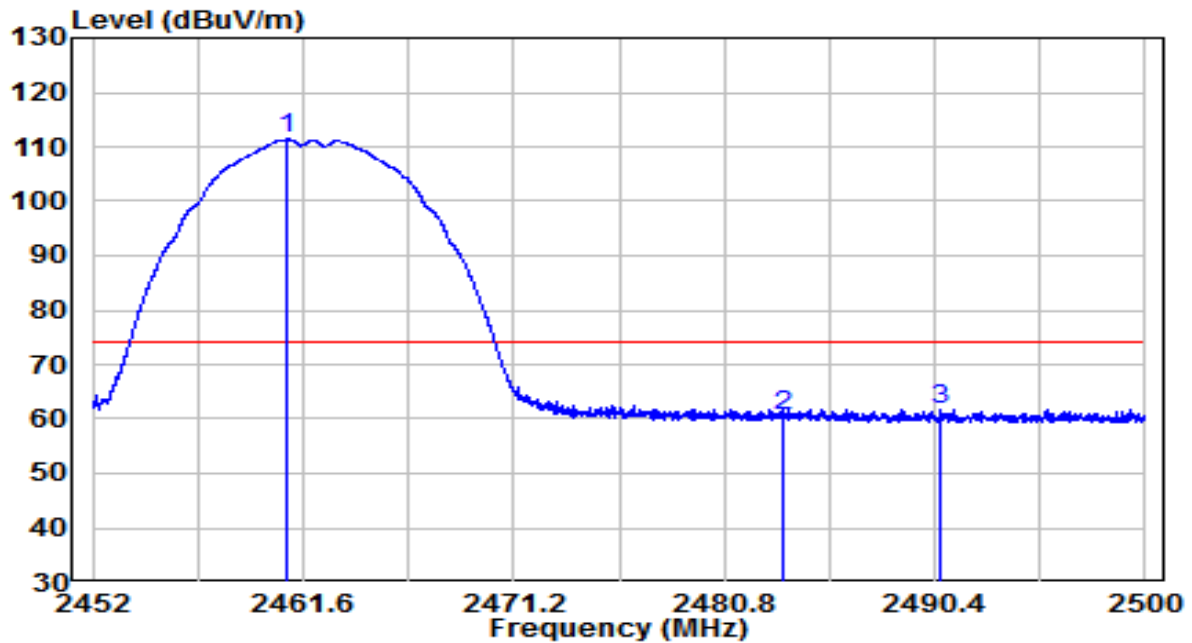


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.856	78.74	32.60	111.34	N/A	N/A	Peak
2		2483.500	27.74	32.70	60.44	-13.56	74.00	Peak
3		2490.640	29.10	32.74	61.84	-12.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11b at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

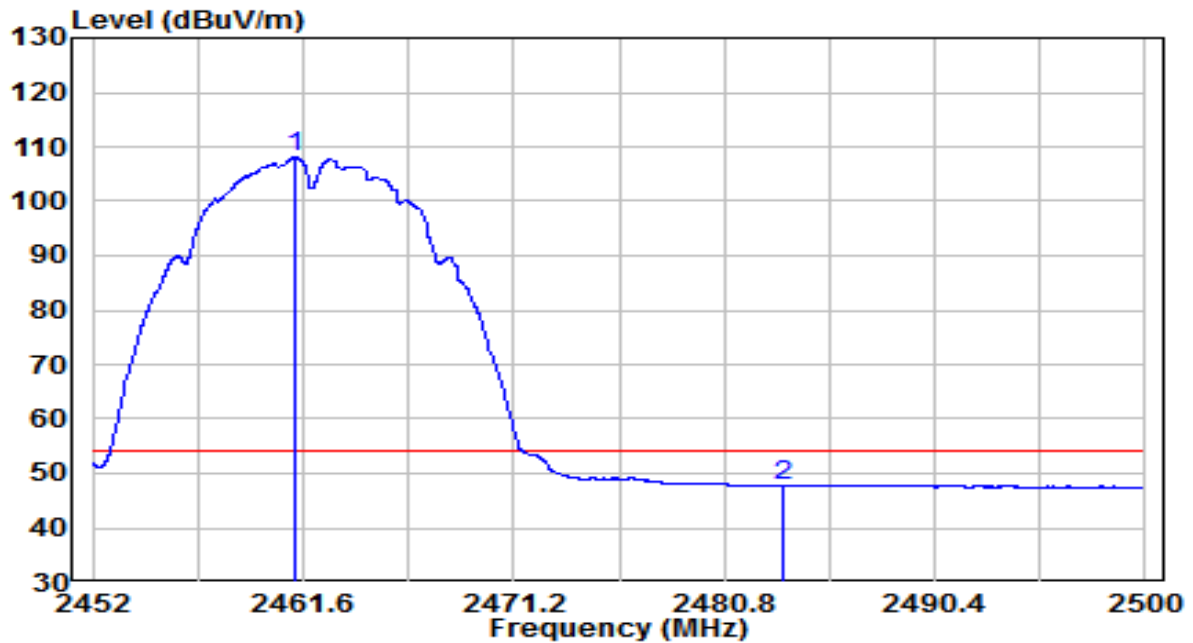


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.264	75.46	32.60	108.07	N/A	N/A	Average
2		2483.500	14.99	32.70	47.70	-6.30	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

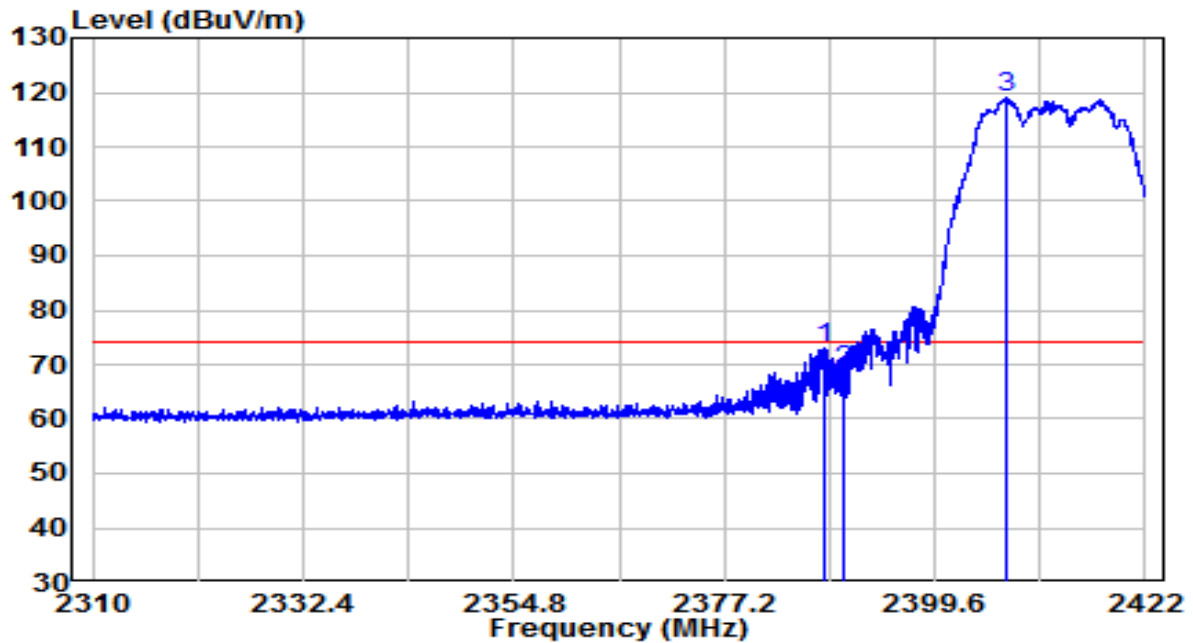


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2387.728	40.65	32.26	72.91	-1.09	74.00	Peak
2	2390.024	36.43	32.27	68.70	-5.30	74.00	Peak
3	* 2407.160	86.55	32.35	118.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

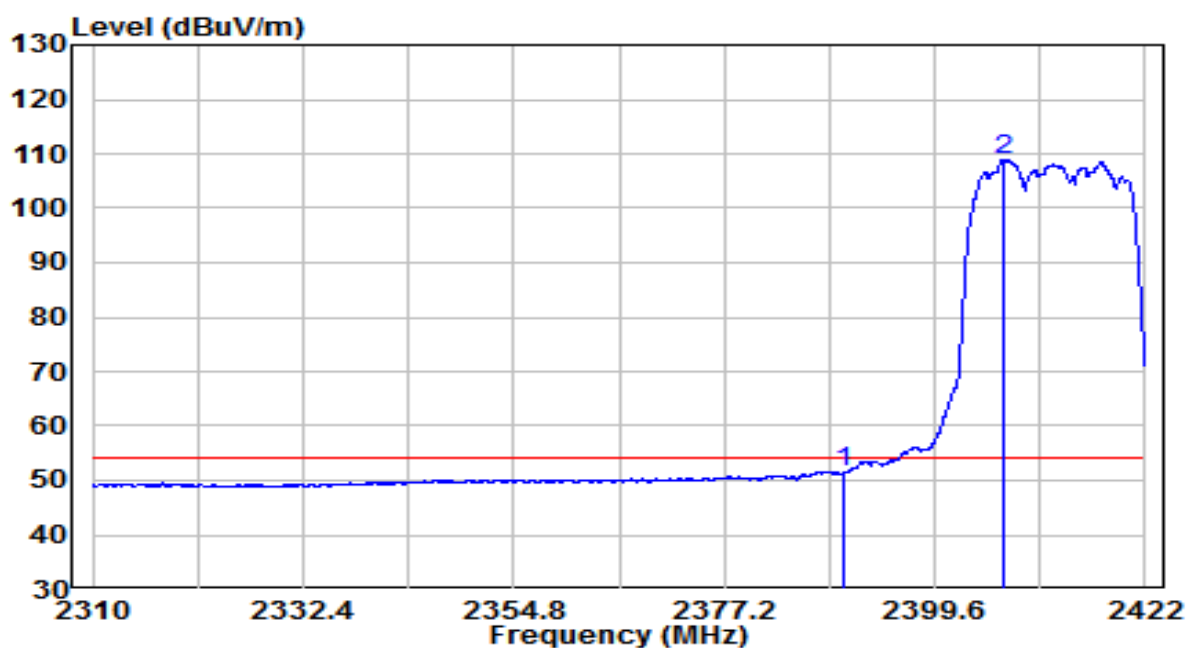


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.19	32.27	51.47	-2.53	54.00	Average
2	* 2406.880	76.53	32.35	108.88	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

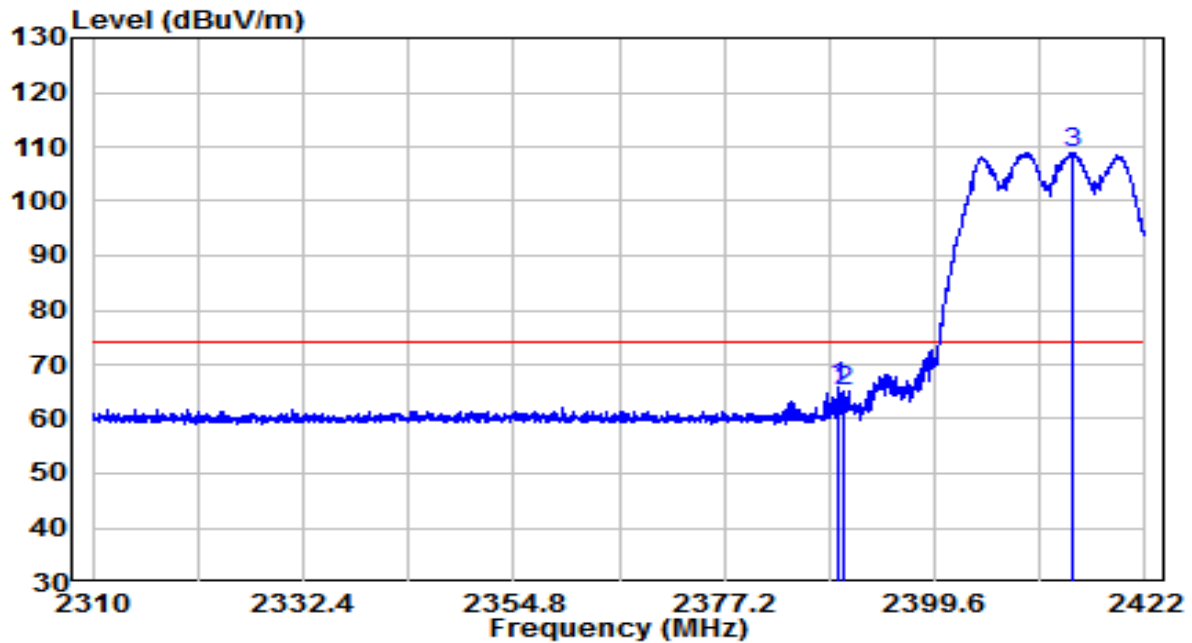


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.240	33.45	32.27	65.72	-8.28	74.00	Peak
2	2390.024	32.98	32.27	65.25	-8.75	74.00	Peak
3	* 2414.216	76.52	32.38	108.91	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

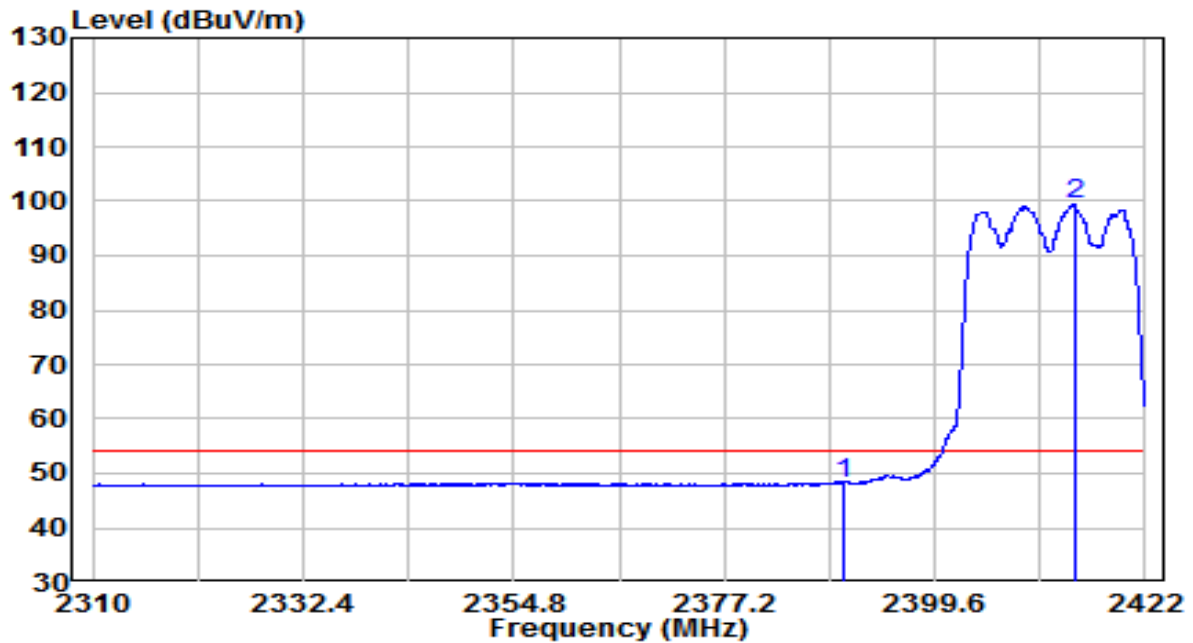


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2390.000	16.01	32.27	48.29	-5.71	54.00	Average
2	* 2414.440	66.92	32.39	99.31	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

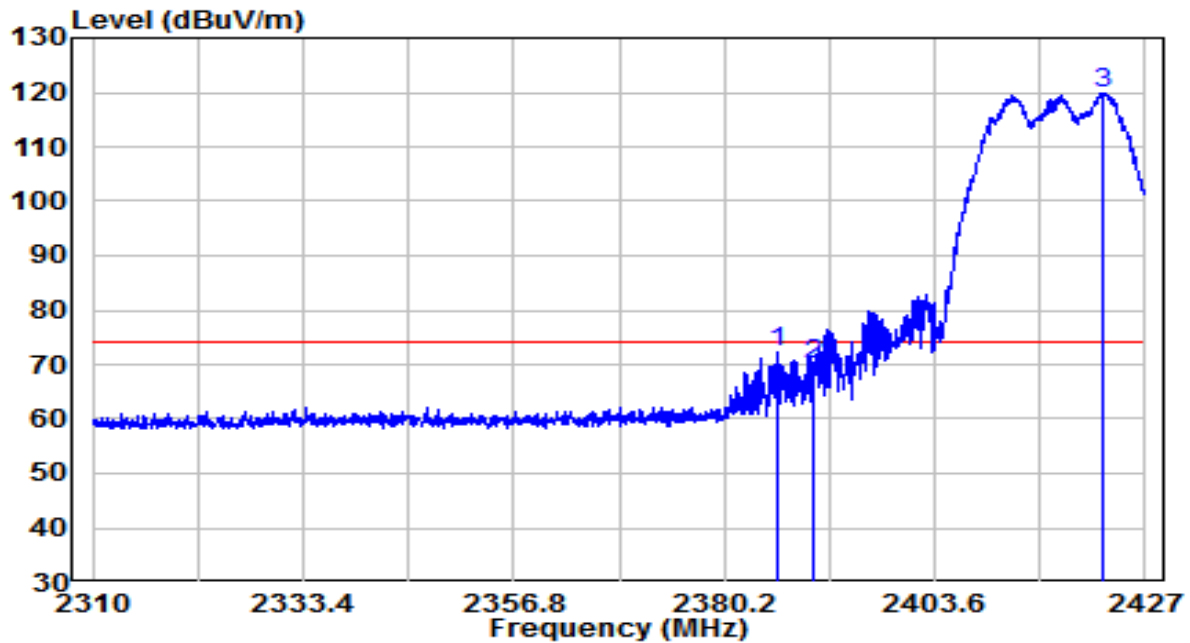


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2385.991	40.10	32.26	72.35	-1.65	74.00	Peak
2	2390.000	37.57	32.27	69.84	-4.16	74.00	Peak
3	* 2422.378	87.49	32.42	119.92	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

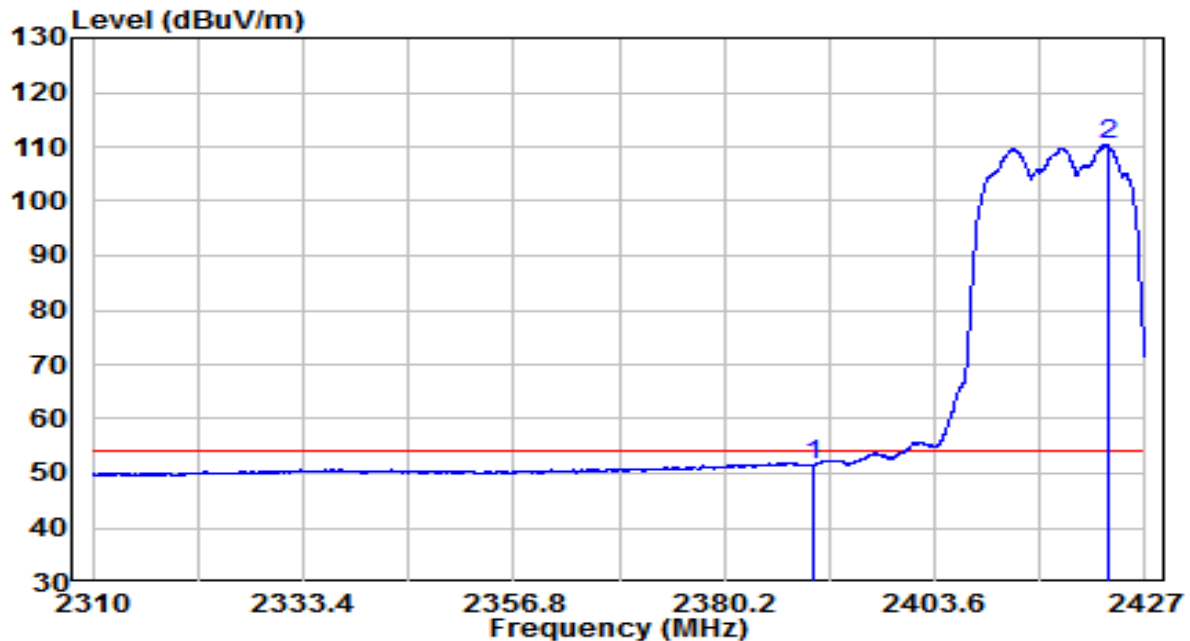


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.028	19.24	32.27	51.51	-2.49	54.00	Average
2	* 2422.846	77.86	32.42	110.28	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

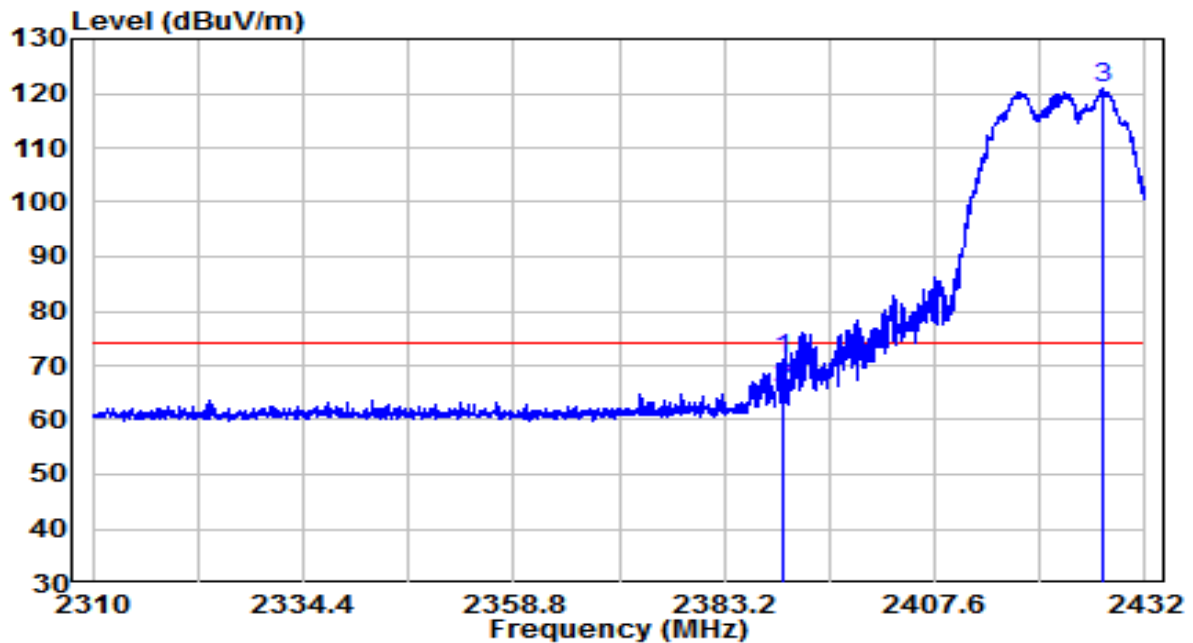


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.910	39.02	32.27	71.29	-2.71	74.00	Peak
2	2390.000	33.69	32.27	65.96	-8.04	74.00	Peak
3	* 2427.059	88.54	32.44	120.98	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

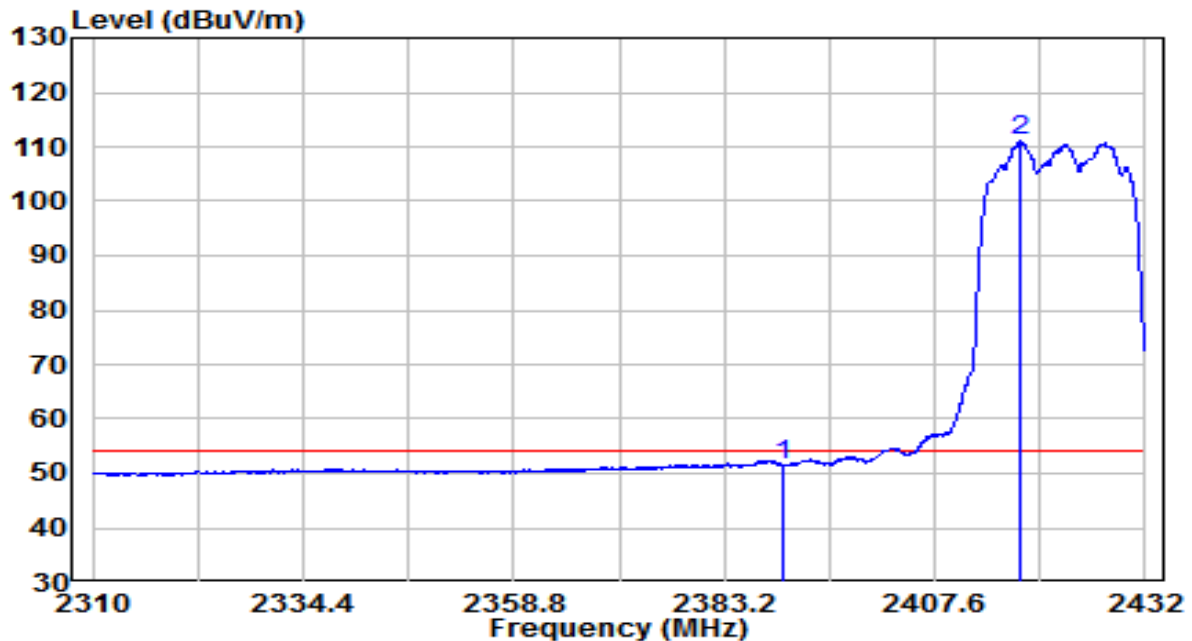


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.20	32.27	51.47	-2.53	54.00	Average
2	* 2417.421	78.68	32.40	111.08	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

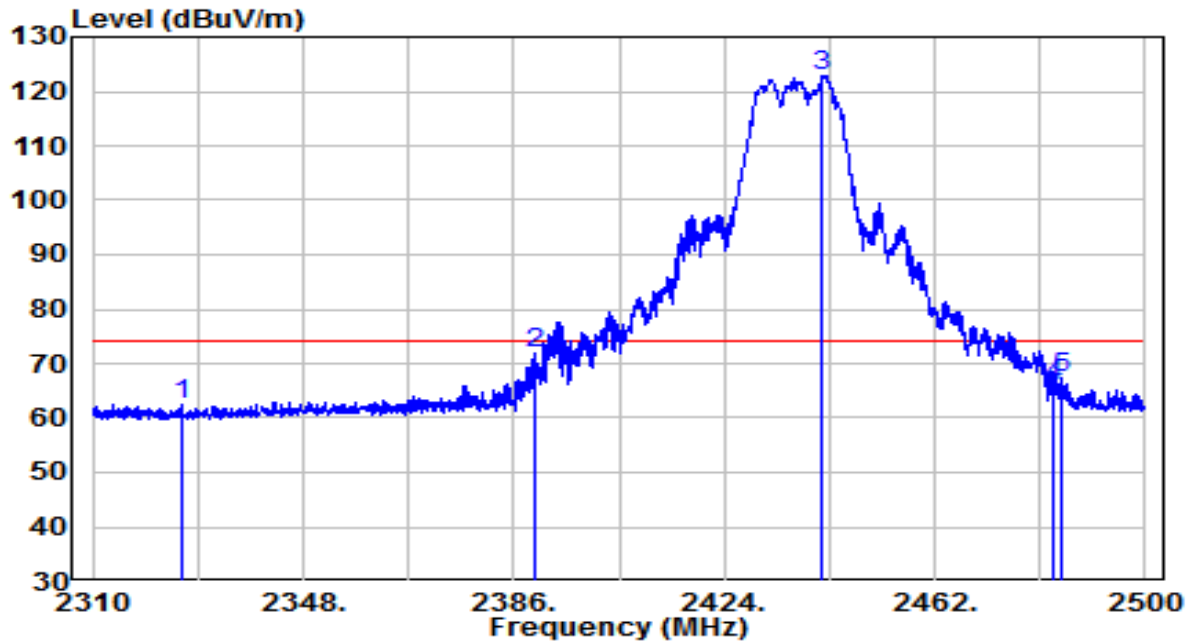


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2325.960	30.33	31.98	62.31	-11.69	74.00	Peak
2	2389.990	39.61	32.27	71.88	-2.12	74.00	Peak
3	* 2441.765	90.38	32.51	122.90	N/A	N/A	Peak
4	2483.500	33.30	32.70	66.01	-7.99	74.00	Peak
5	2484.990	34.79	32.71	67.50	-6.50	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

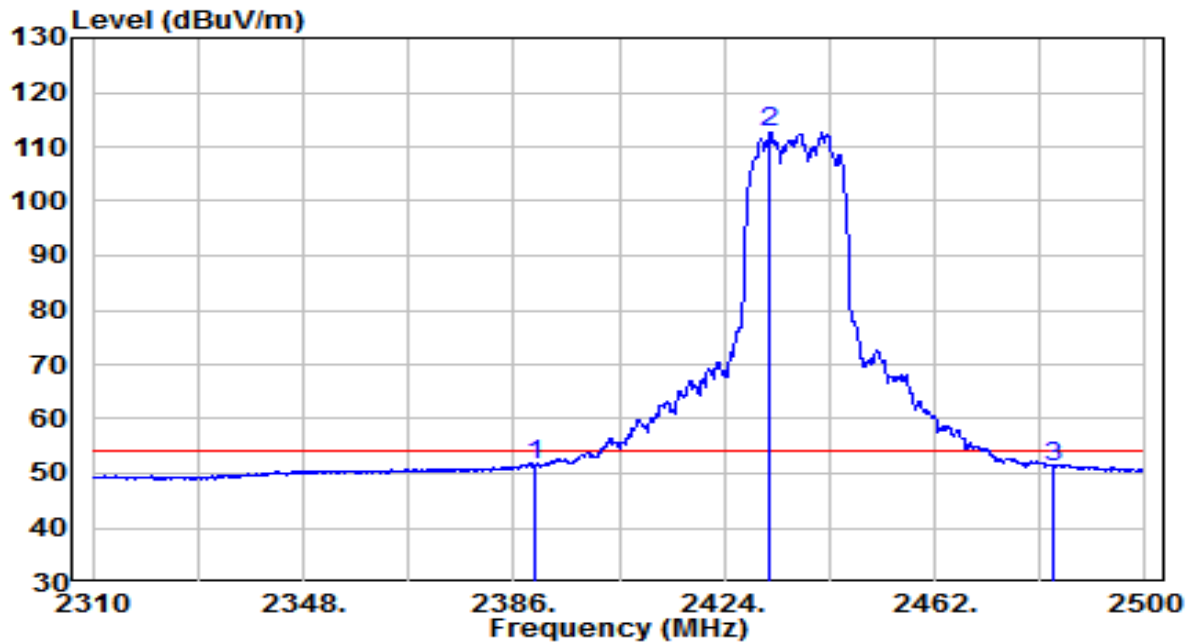


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.990	19.42	32.27	51.70	-2.30	54.00	Average
2	* 2432.360	80.04	32.47	112.51	N/A	N/A	Average
3	2483.500	18.57	32.70	51.27	-2.73	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

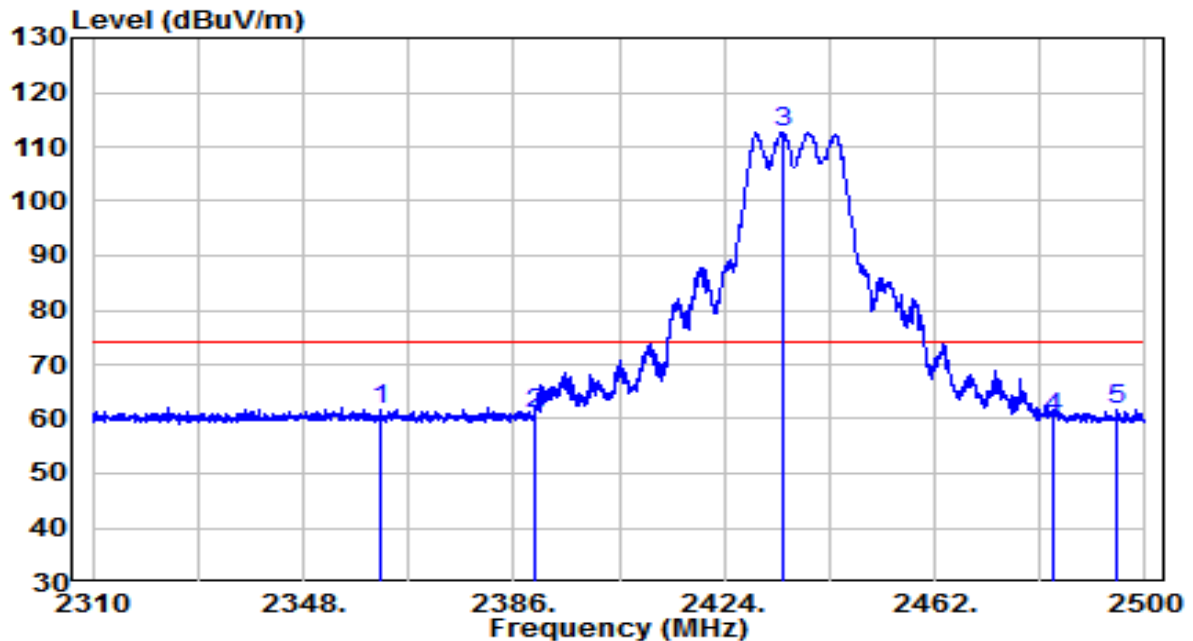


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2361.965	29.66	32.15	61.81	-12.19	74.00	Peak
2	2390.000	28.72	32.27	61.00	-13.00	74.00	Peak
3	* 2434.640	80.16	32.48	112.64	N/A	N/A	Peak
4	2483.500	27.33	32.70	60.03	-13.97	74.00	Peak
5	2494.965	28.89	32.76	61.65	-12.35	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.5°C/44%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

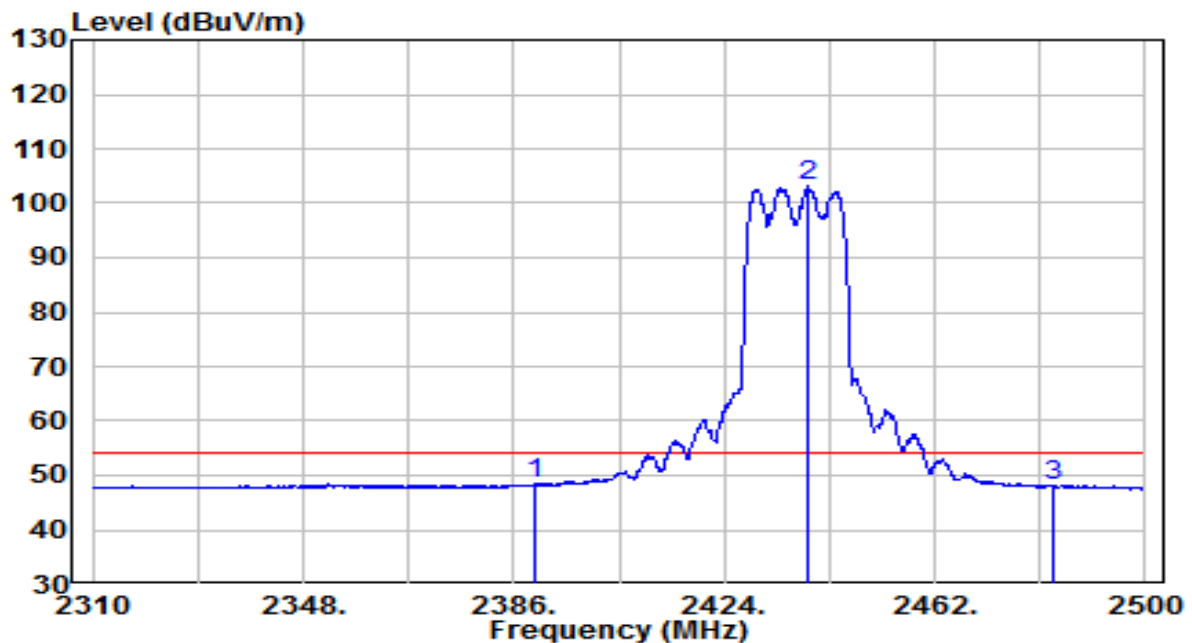


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	16.06	32.27	48.33	-5.67	54.00	Average
2	* 2439.105	70.54	32.50	103.05	N/A	N/A	Average
3	2483.500	15.28	32.70	47.99	-6.01	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

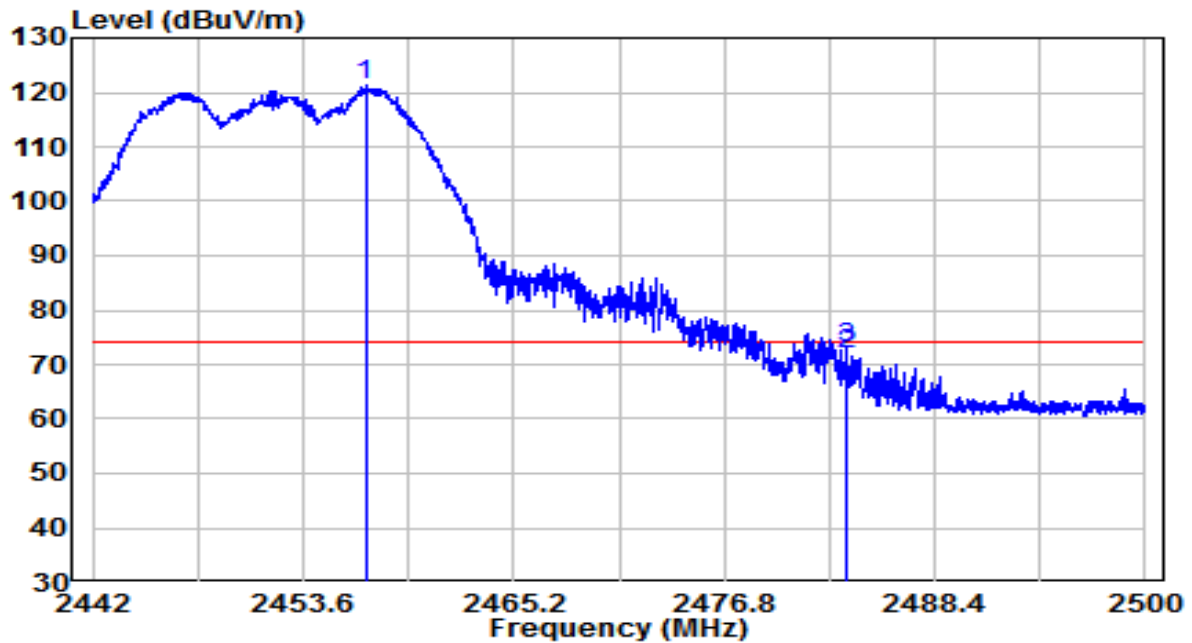


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2457.022	88.80	32.58	121.38	N/A	N/A	Peak
2		2483.500	39.18	32.70	71.89	-2.11	74.00	Peak
3		2483.528	40.27	32.70	72.97	-1.03	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

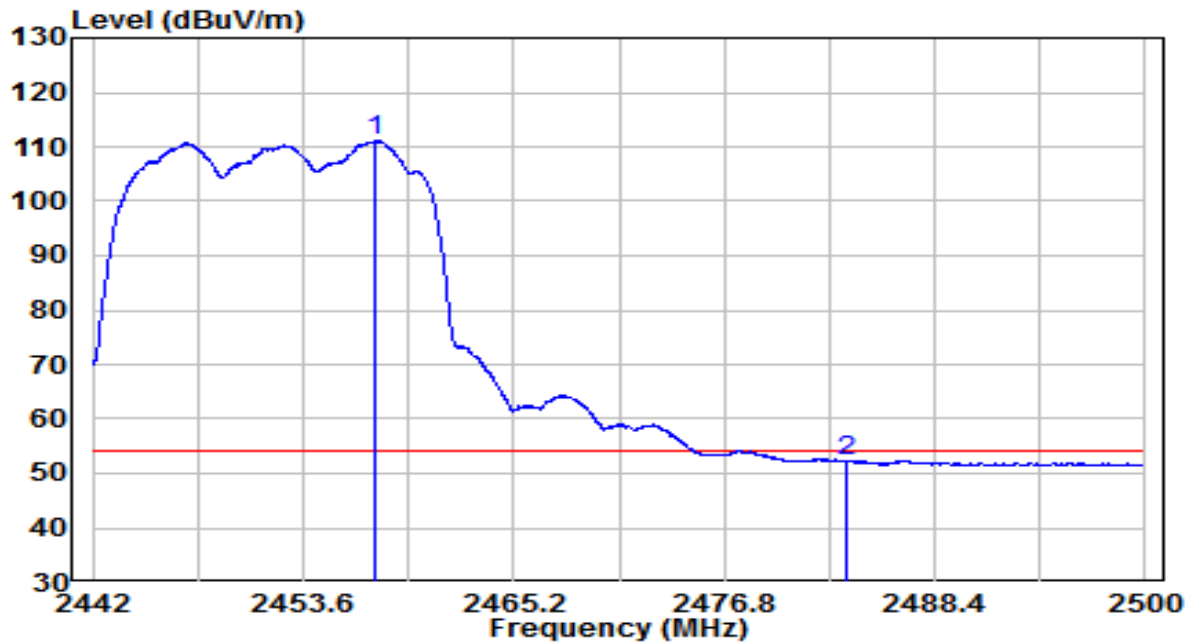


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2457.544	78.51	32.58	111.10	N/A	N/A	Average
2		2483.500	19.62	32.70	52.32	-1.68	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

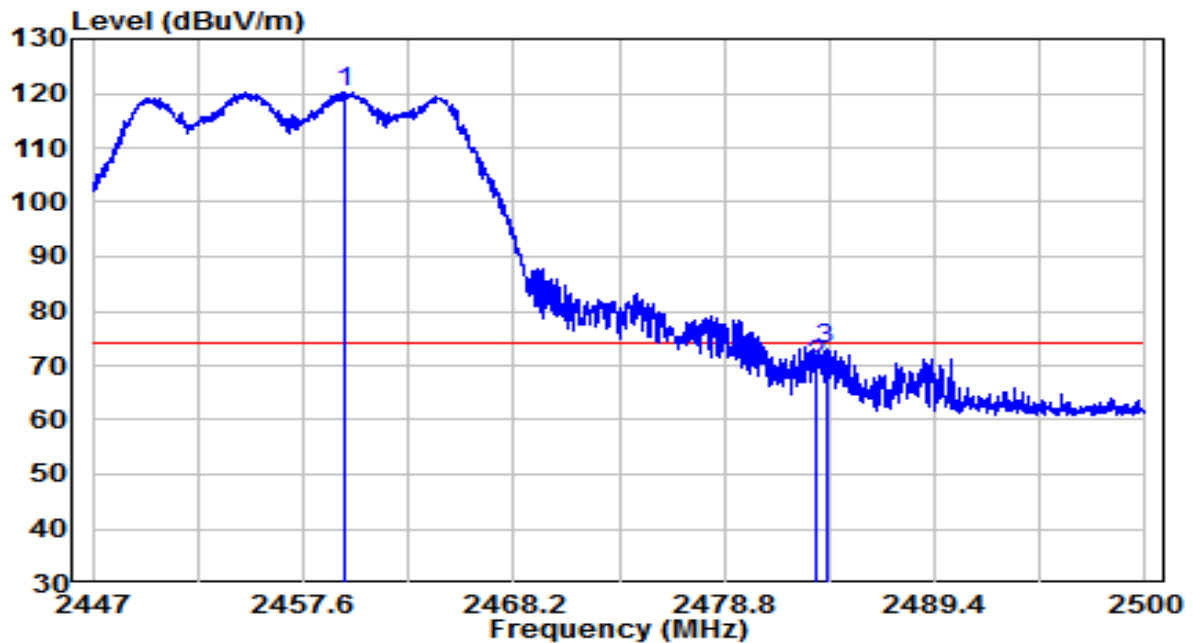


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2459.667	87.56	32.59	120.16	N/A	N/A	Peak
2		2483.490	37.44	32.70	70.14	-3.86	74.00	Peak
3		2483.915	40.15	32.71	72.86	-1.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

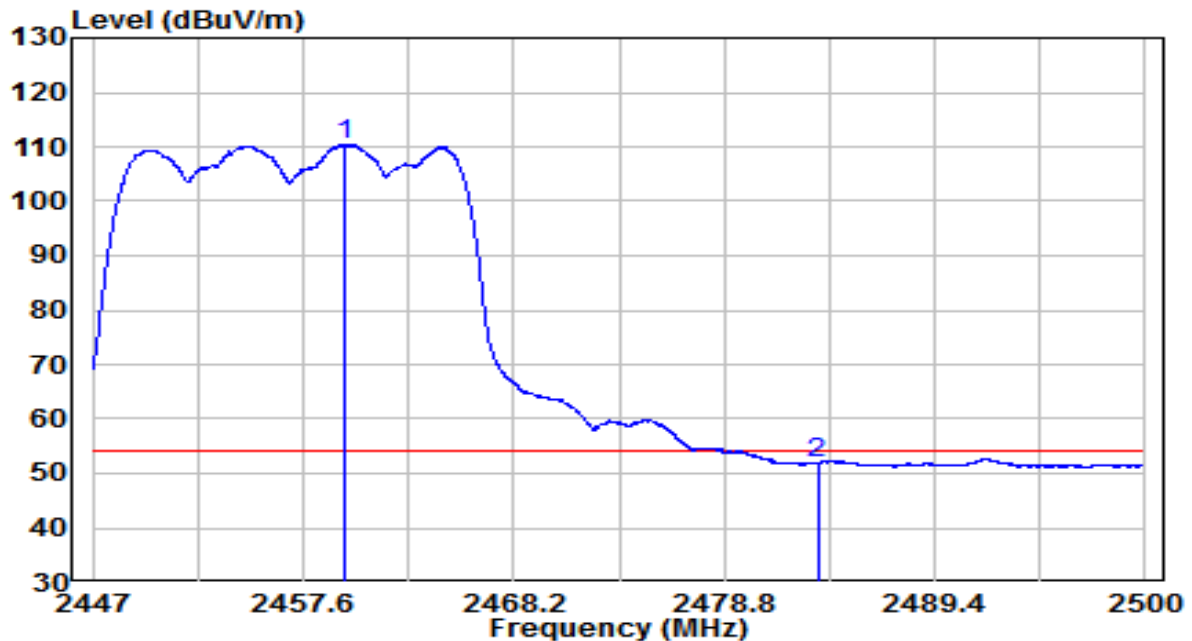


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2459.694	77.84	32.59	110.44	N/A	N/A	Average
2		2483.500	19.27	32.70	51.98	-2.02	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

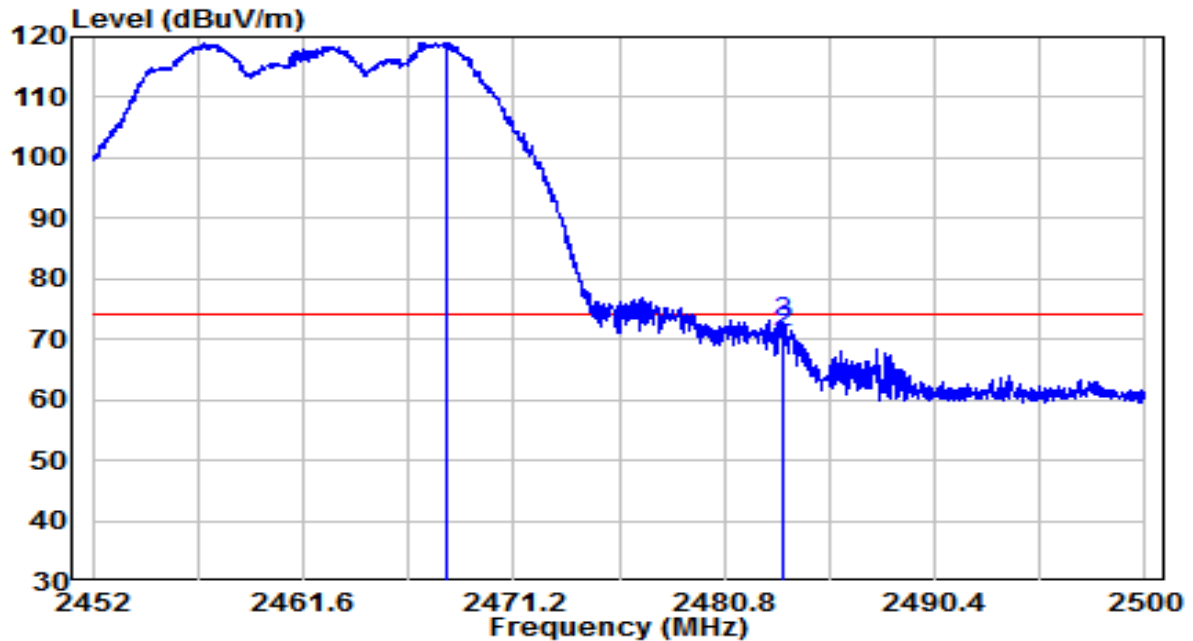


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2468.176	86.37	32.63	119.00	N/A	N/A	Peak
2		2483.500	38.32	32.70	71.02	-2.98	74.00	Peak
3		2483.536	40.21	32.70	72.92	-1.08	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

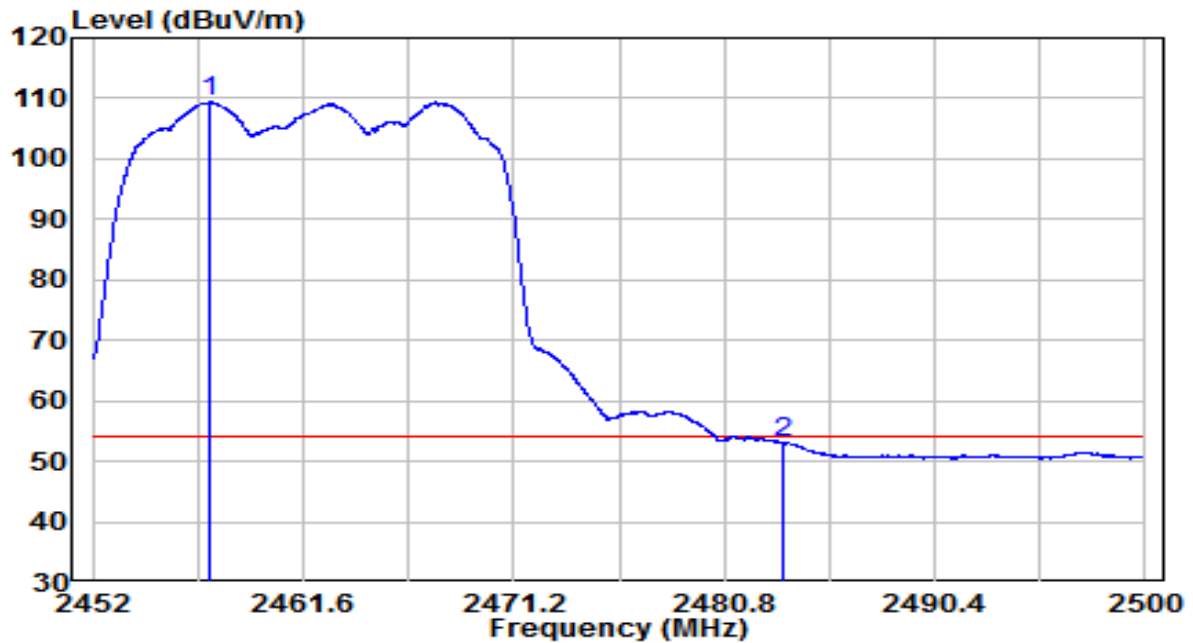


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2457.352	76.86	32.58	109.45	N/A	N/A	Average
2		2483.500	20.35	32.70	53.06	-0.94	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

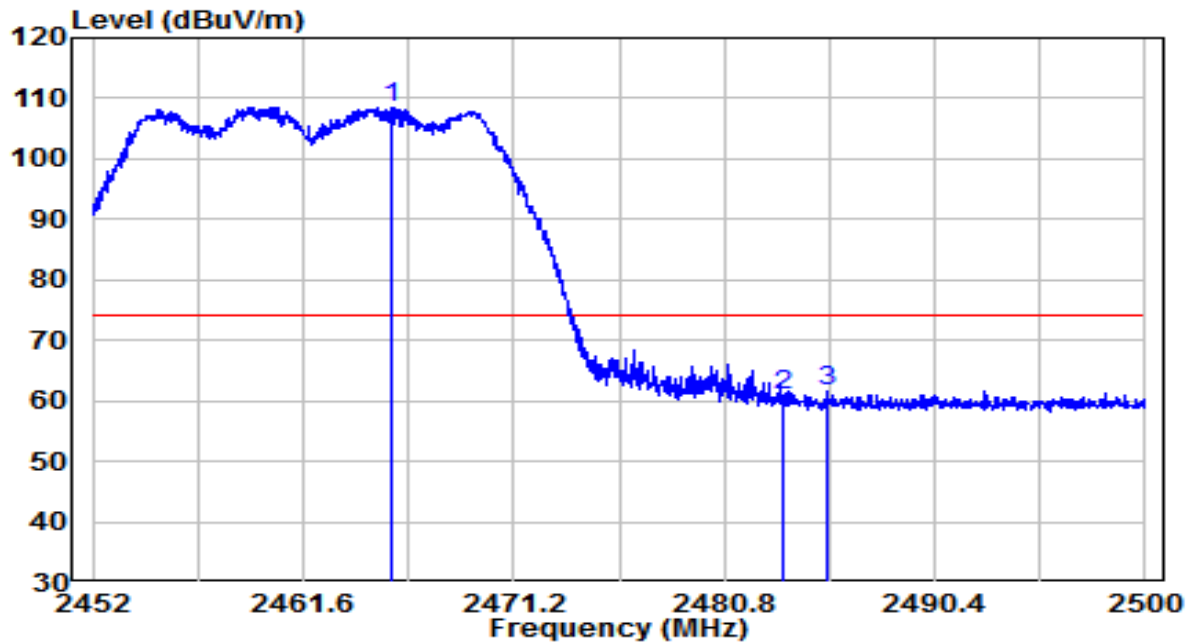


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2465.656	75.93	32.62	108.56	N/A	N/A	Peak
2		2483.500	28.03	32.70	60.74	-13.26	74.00	Peak
3		2485.528	29.04	32.71	61.75	-12.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11g at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

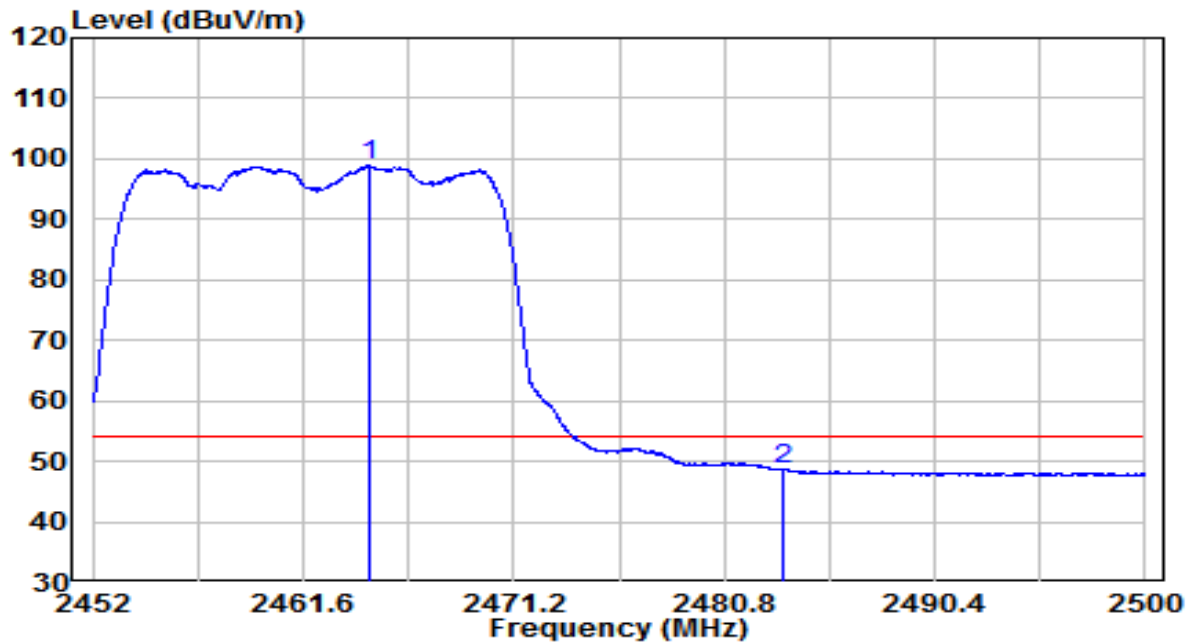


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2464.600	66.28	32.62	98.90	N/A	N/A	Average
2		2483.488	15.93	32.70	48.63	-5.37	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

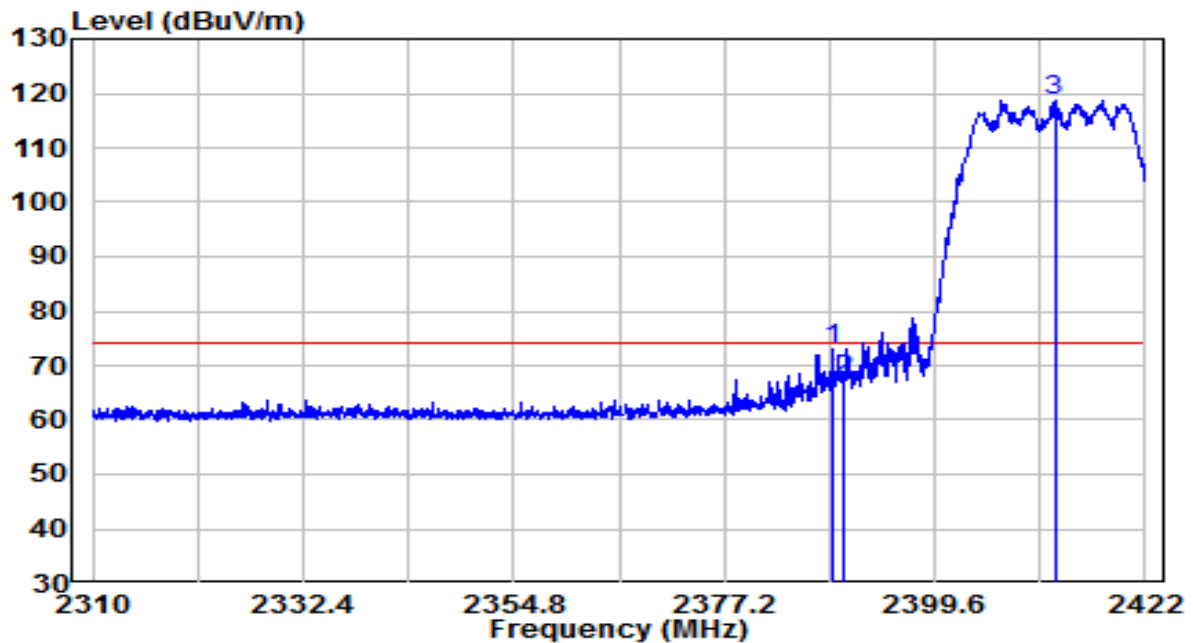


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.680	40.68	32.27	72.95	-1.05	74.00	Peak
2	2390.000	35.06	32.27	67.33	-6.67	74.00	Peak
3	* 2412.368	86.48	32.38	118.86	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

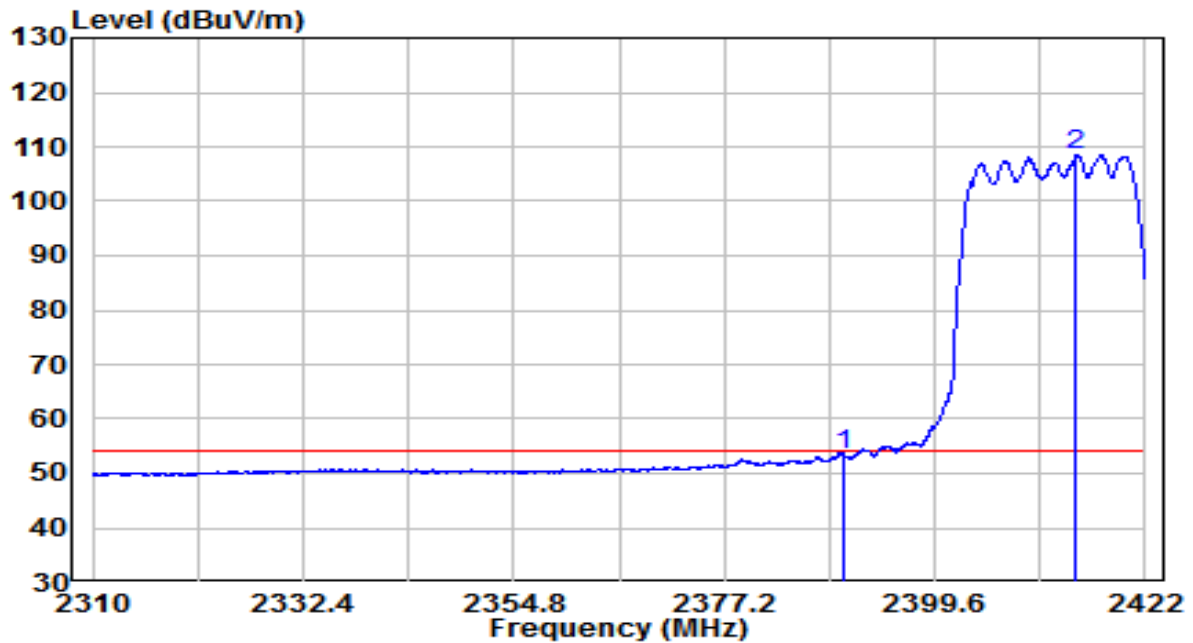


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	21.12	32.27	53.40	-0.60	54.00	Average
2	* 2414.664	76.11	32.39	108.50	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

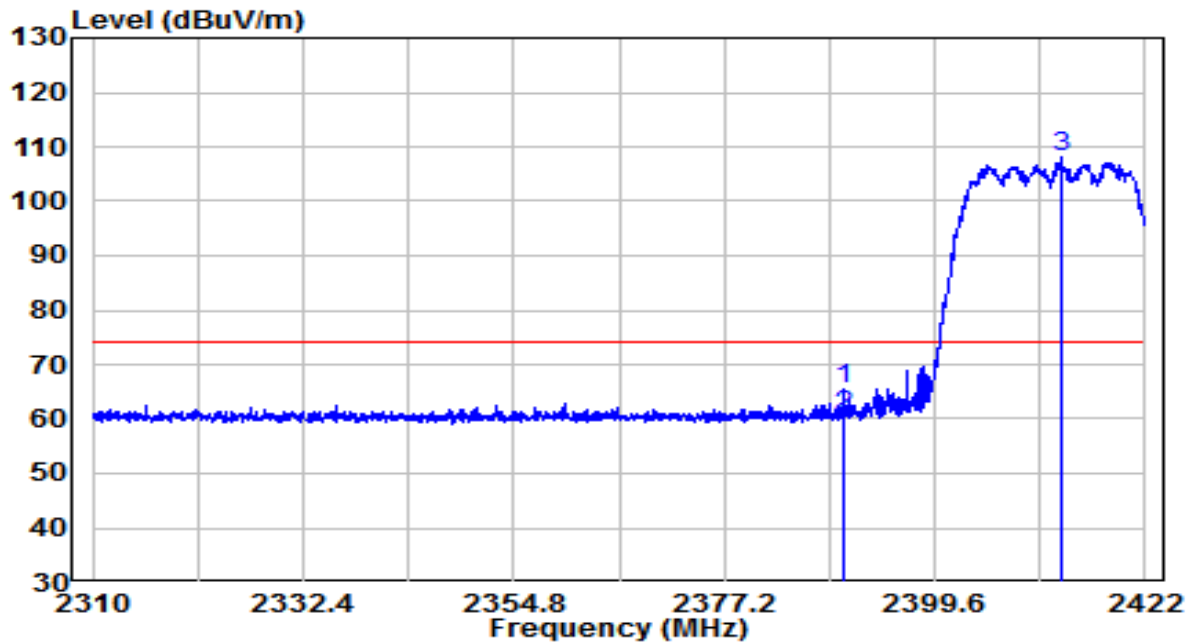


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.968	33.13	32.27	65.40	-8.60	74.00	Peak
2	2390.000	28.30	32.27	60.57	-13.43	74.00	Peak
3	*	75.62	32.38	108.00	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

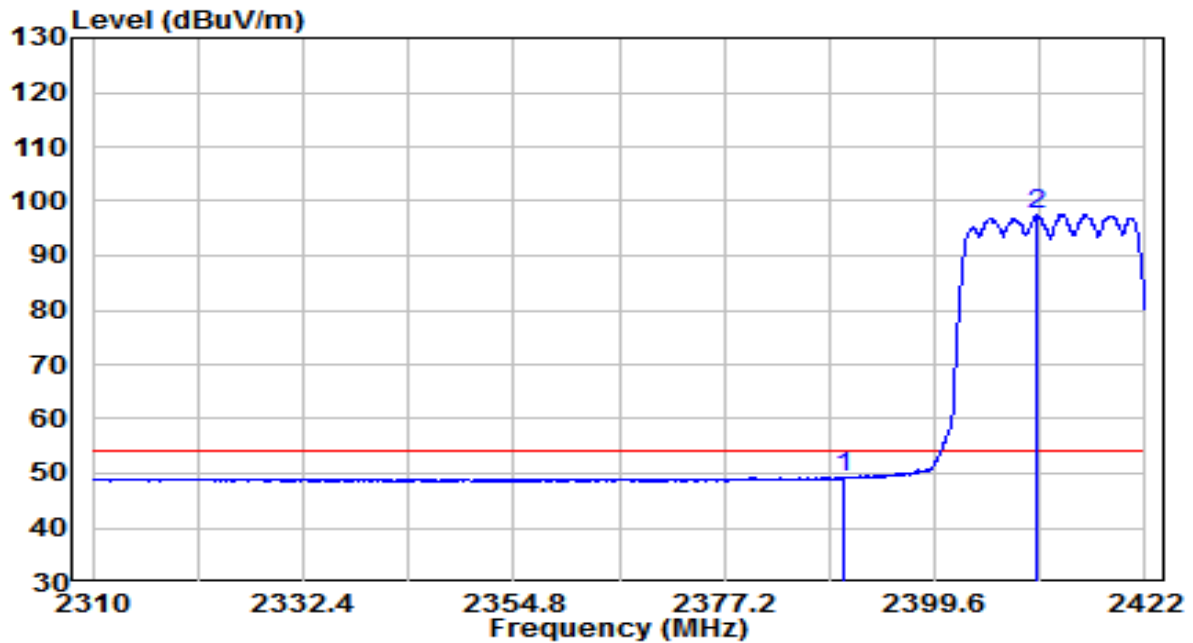


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	17.05	32.27	49.32	-4.68	54.00	Average
2	* 2410.520	65.24	32.37	97.61	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

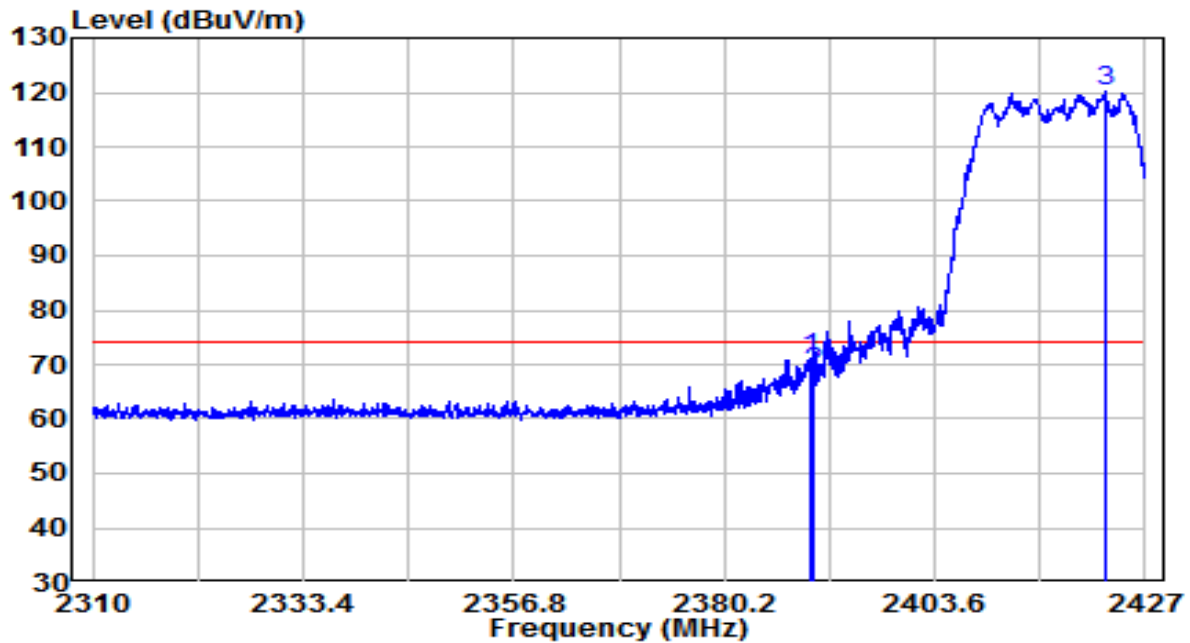


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.853	38.85	32.27	71.12	-2.88	74.00	Peak
2	2390.028	36.24	32.27	68.52	-5.48	74.00	Peak
3	* 2422.496	87.75	32.42	120.17	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

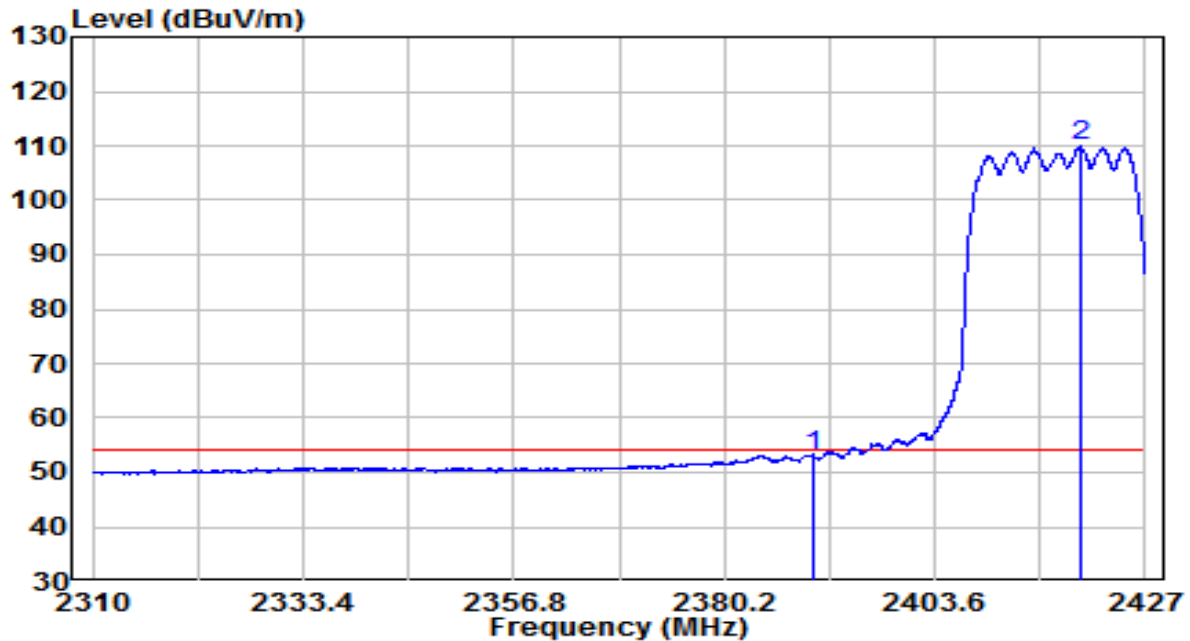


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	20.87	32.27	53.14	-0.86	54.00	Average
2	* 2419.746	77.69	32.41	110.10	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

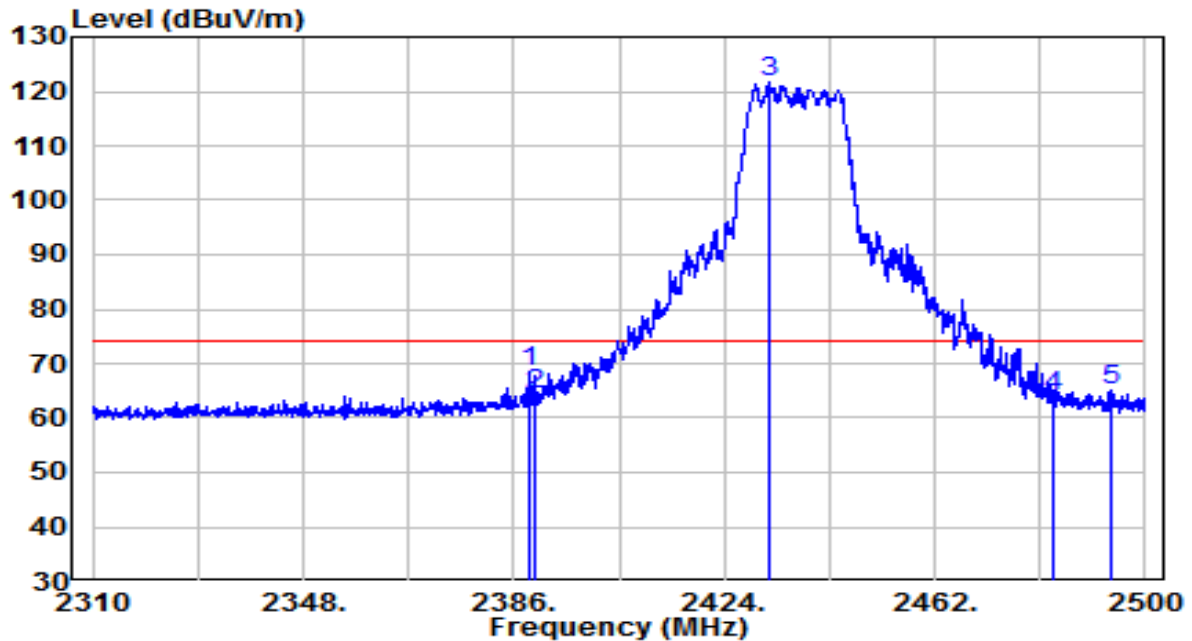


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2388.660	36.04	32.27	68.31	-5.69	74.00	Peak
2	2390.000	31.92	32.27	64.19	-9.81	74.00	Peak
3	* 2432.265	89.40	32.47	121.87	N/A	N/A	Peak
4	2483.500	31.33	32.70	64.04	-9.96	74.00	Peak
5	2493.635	32.44	32.75	65.19	-8.81	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

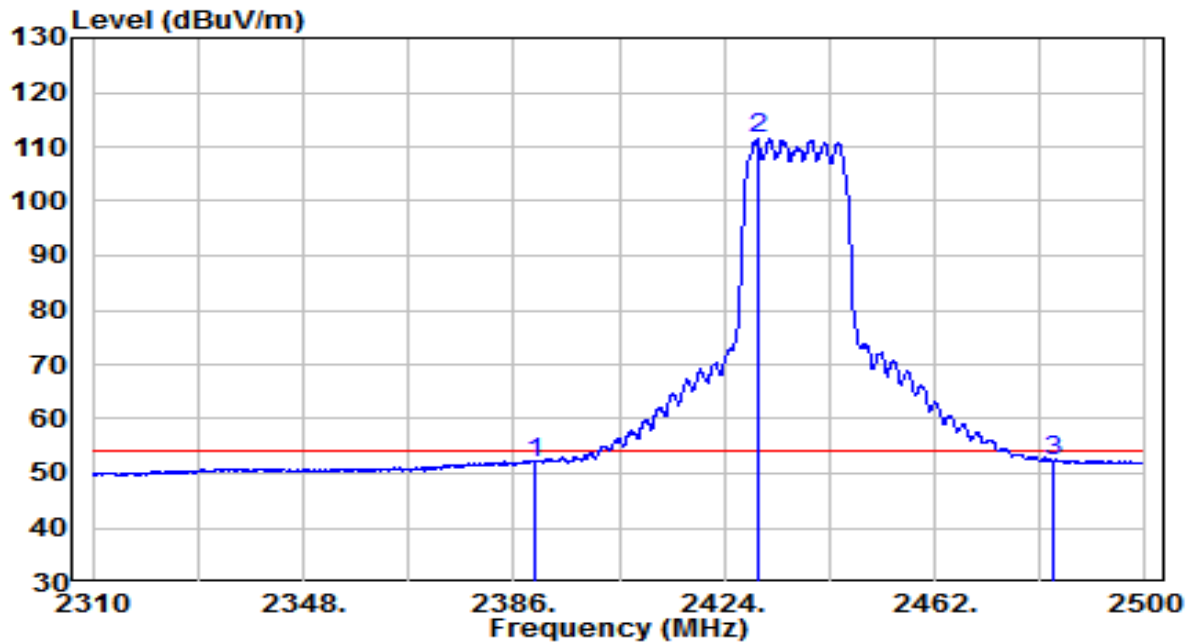


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.78	32.27	52.05	-1.95	54.00	Average
2	* 2429.985	78.89	32.46	111.35	N/A	N/A	Average
3	2483.500	19.45	32.70	52.16	-1.84	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

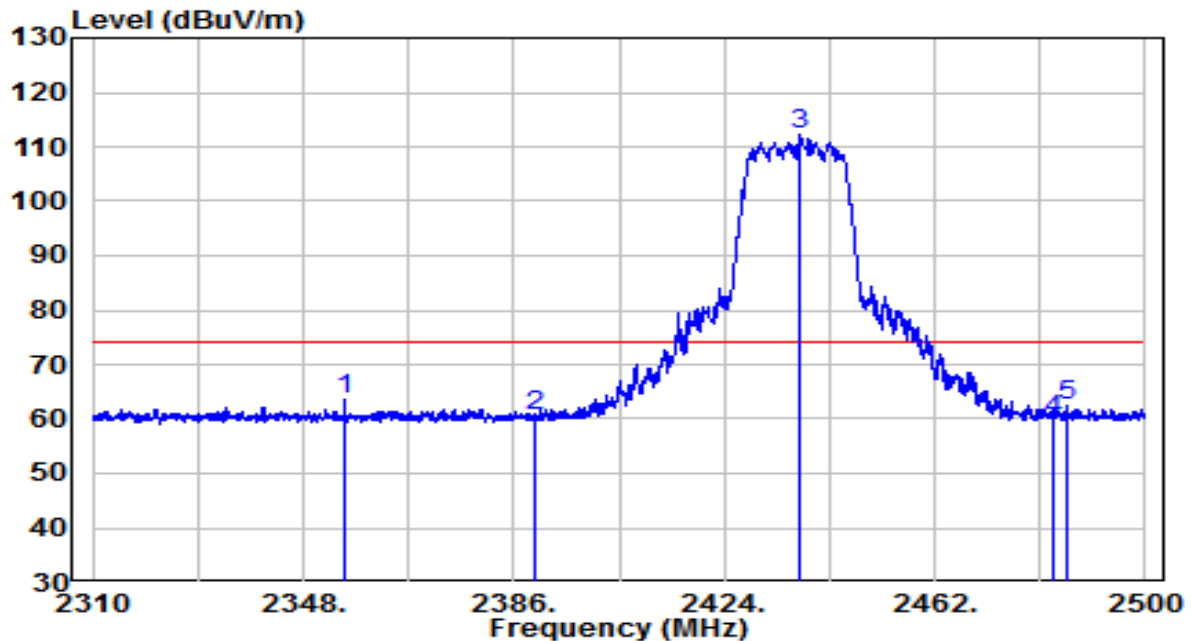


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2355.505	31.40	32.12	63.52	-10.48	74.00	Peak
2	2390.000	28.16	32.27	60.44	-13.56	74.00	Peak
3	* 2437.585	79.72	32.49	112.21	N/A	N/A	Peak
4	2483.500	27.25	32.70	59.95	-14.05	74.00	Peak
5	2485.655	29.59	32.71	62.30	-11.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

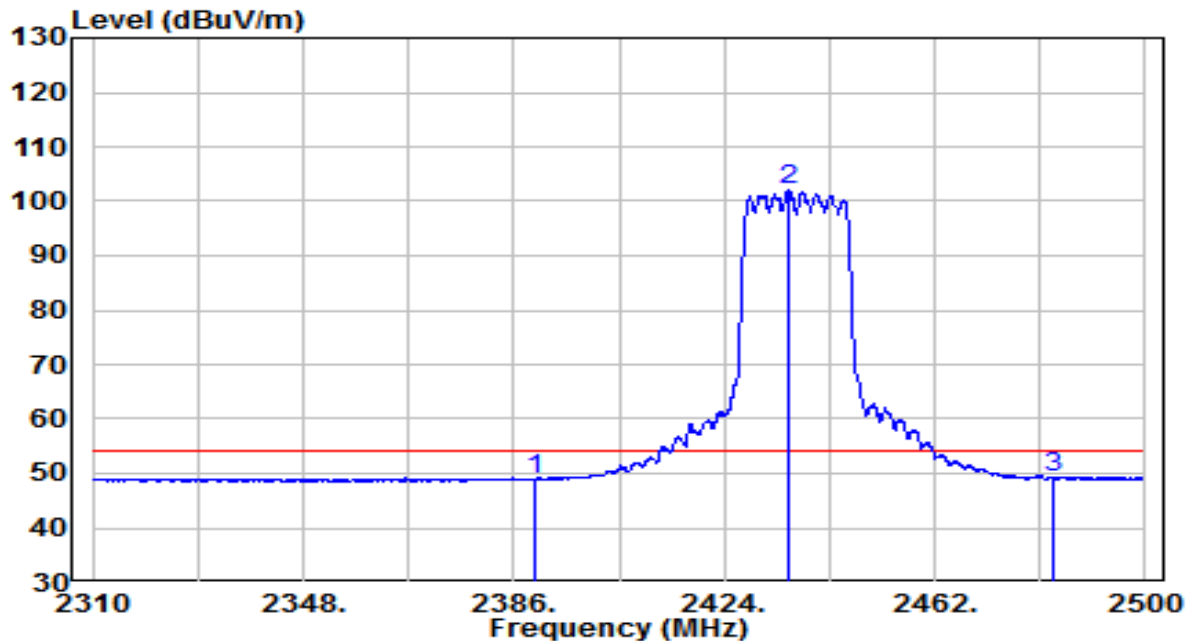


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	16.67	32.27	48.94	-5.06	54.00	Average
2	* 2435.495	69.48	32.48	101.96	N/A	N/A	Average
3	2483.500	16.41	32.70	49.12	-4.88	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

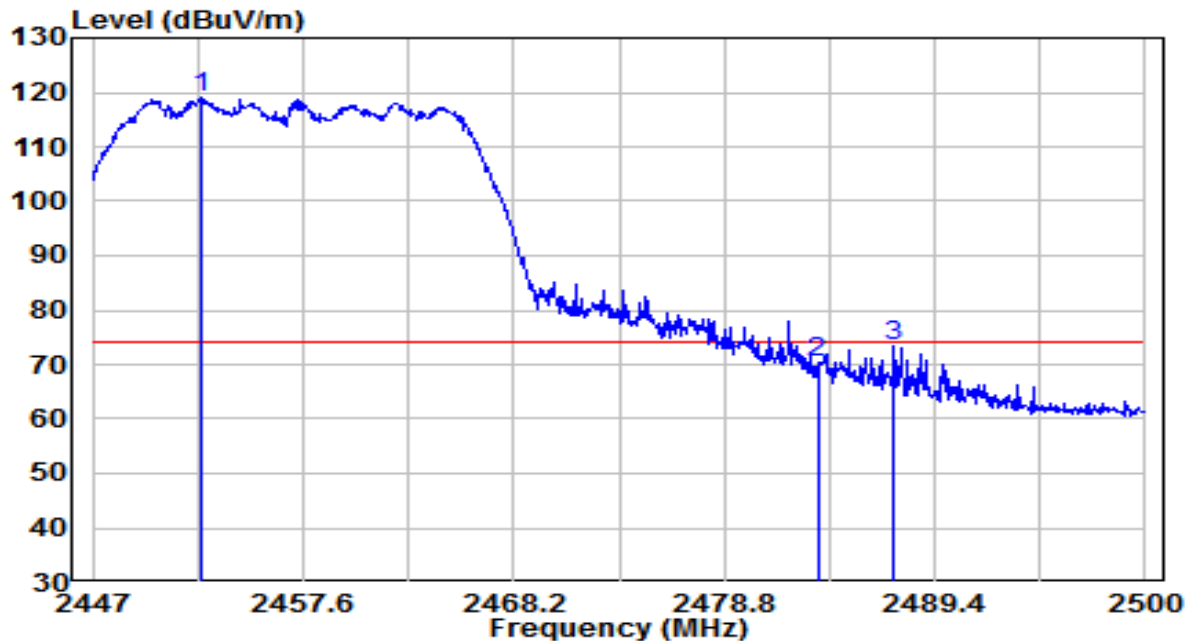


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2452.406	86.38	32.56	118.94	N/A	N/A	Peak
2		2483.500	37.65	32.70	70.35	-3.65	74.00	Peak
3		2487.333	40.59	32.72	73.31	-0.69	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

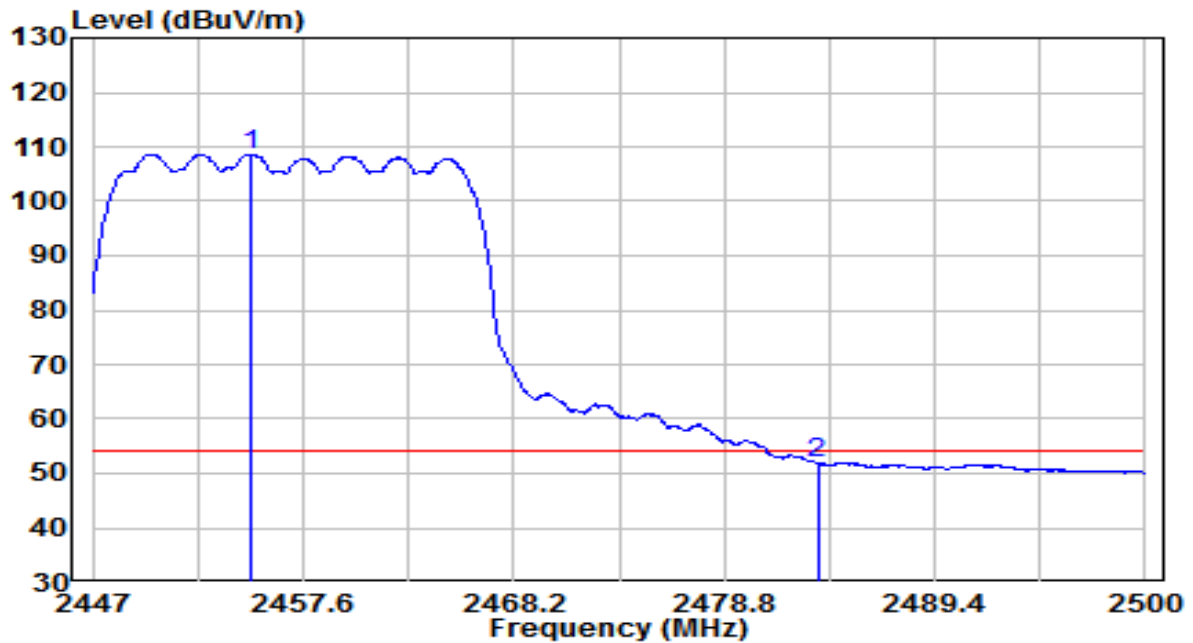


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2455.003	76.07	32.57	108.64	N/A	N/A	Average
2		2483.500	19.16	32.70	51.86	-2.14	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

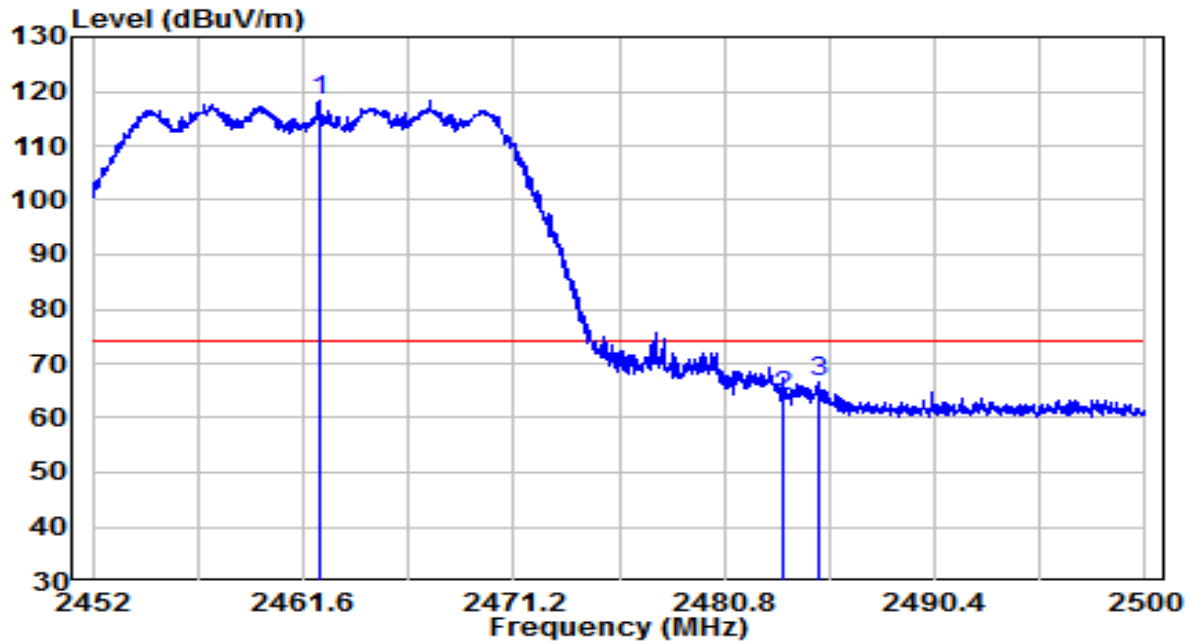


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.368	85.56	32.61	118.17	N/A	N/A	Peak
2		2483.488	31.14	32.70	63.85	-10.15	74.00	Peak
3		2485.144	33.73	32.71	66.44	-7.56	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

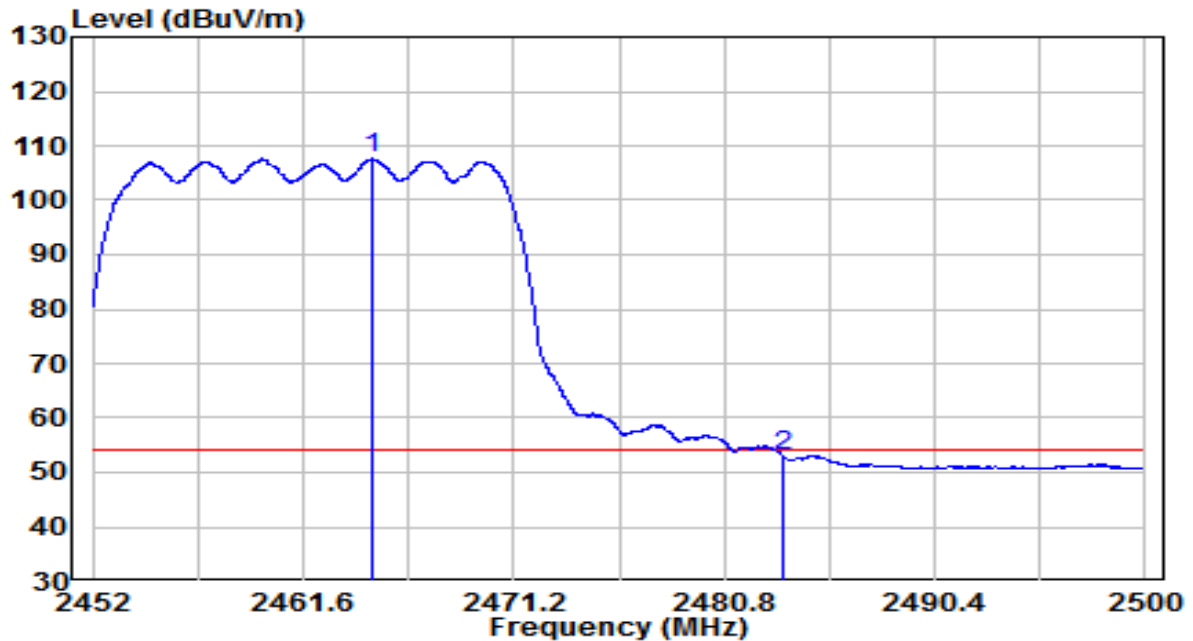


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2464.720	74.98	32.62	107.60	N/A	N/A	Average
2		2483.500	20.33	32.70	53.03	-0.97	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

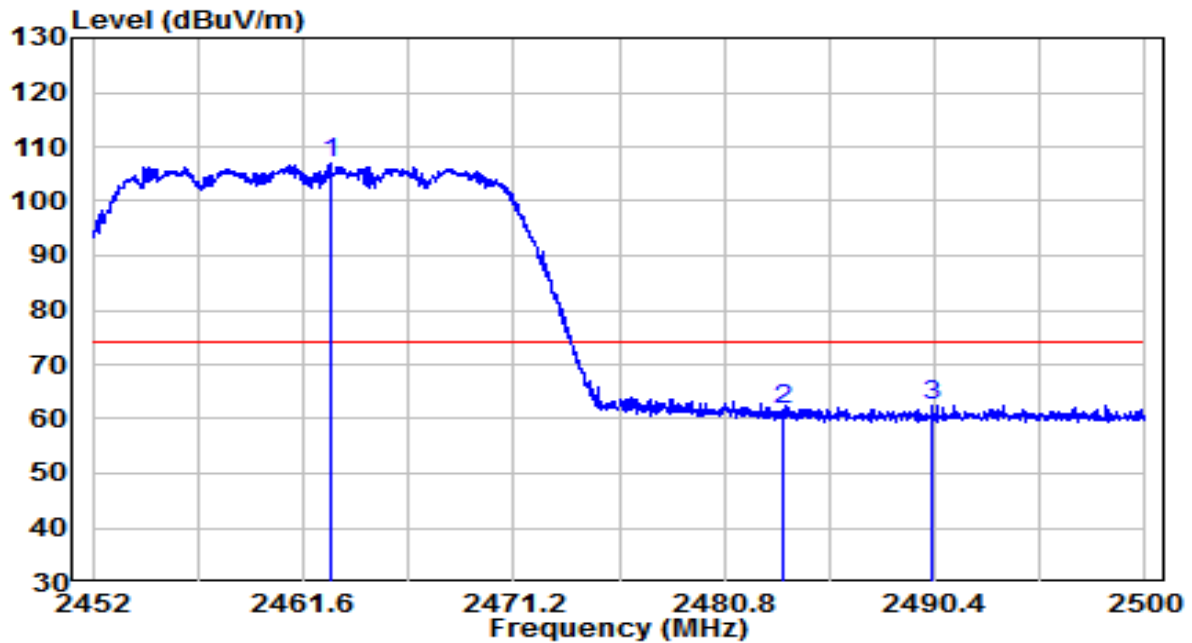


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.848	74.48	32.61	107.09	N/A	N/A	Peak
2		2483.500	28.91	32.70	61.62	-12.38	74.00	Peak
3		2490.280	29.71	32.74	62.45	-11.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

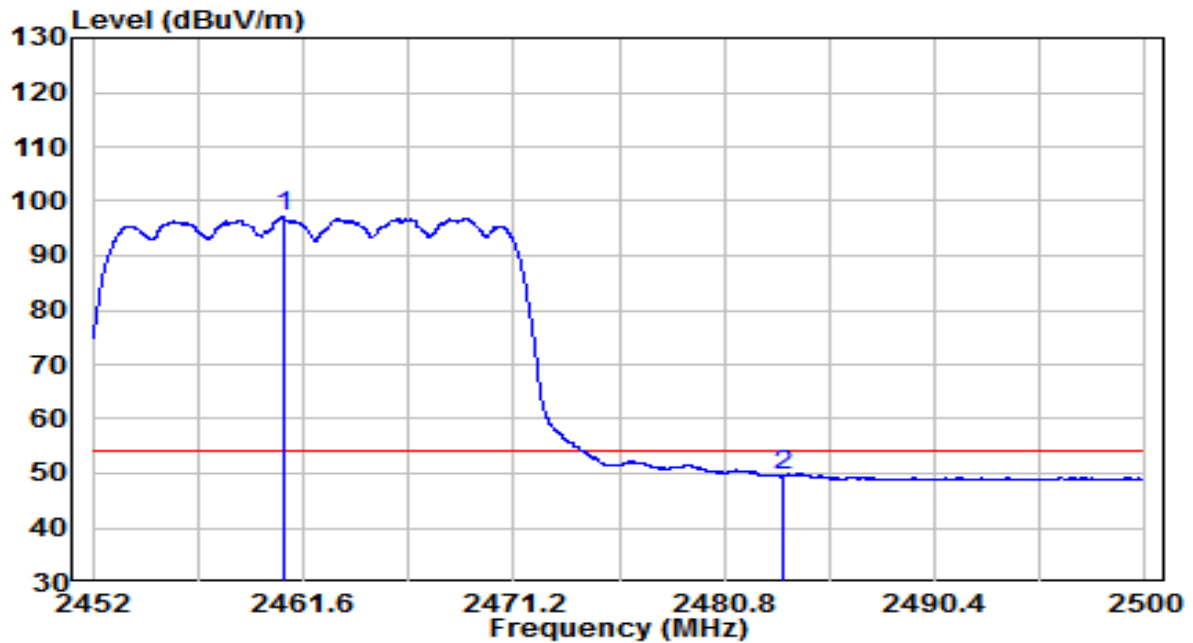


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.688	64.64	32.60	97.24	N/A	N/A	Average
2		2483.500	16.82	32.70	49.52	-4.48	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

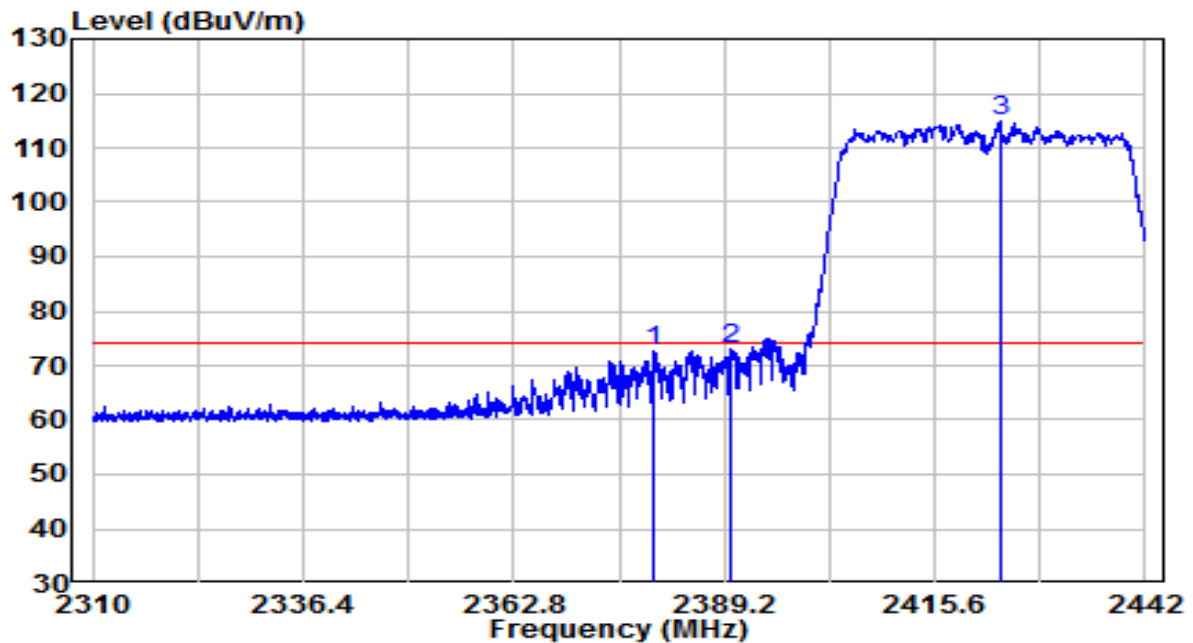


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2380.224	40.57	32.23	72.80	-1.20	74.00	Peak
2	2390.000	40.92	32.27	73.19	-0.81	74.00	Peak
3	* 2423.784	82.44	32.43	114.87	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

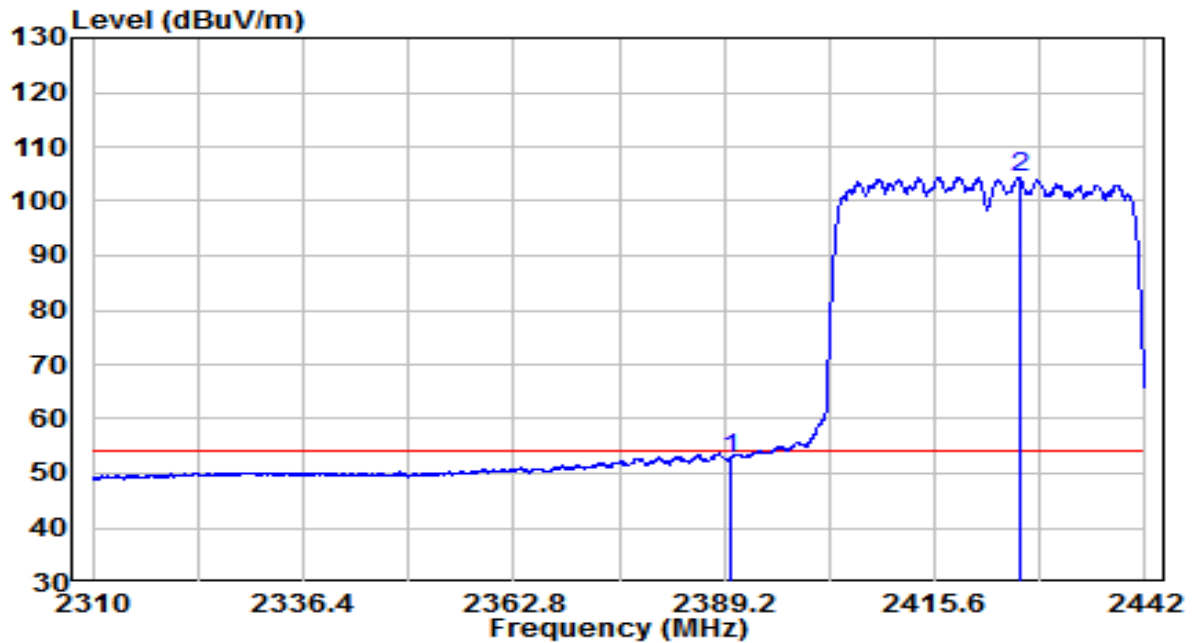


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	20.44	32.27	52.71	-1.29	54.00	Average
2	* 2426.226	72.02	32.44	104.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

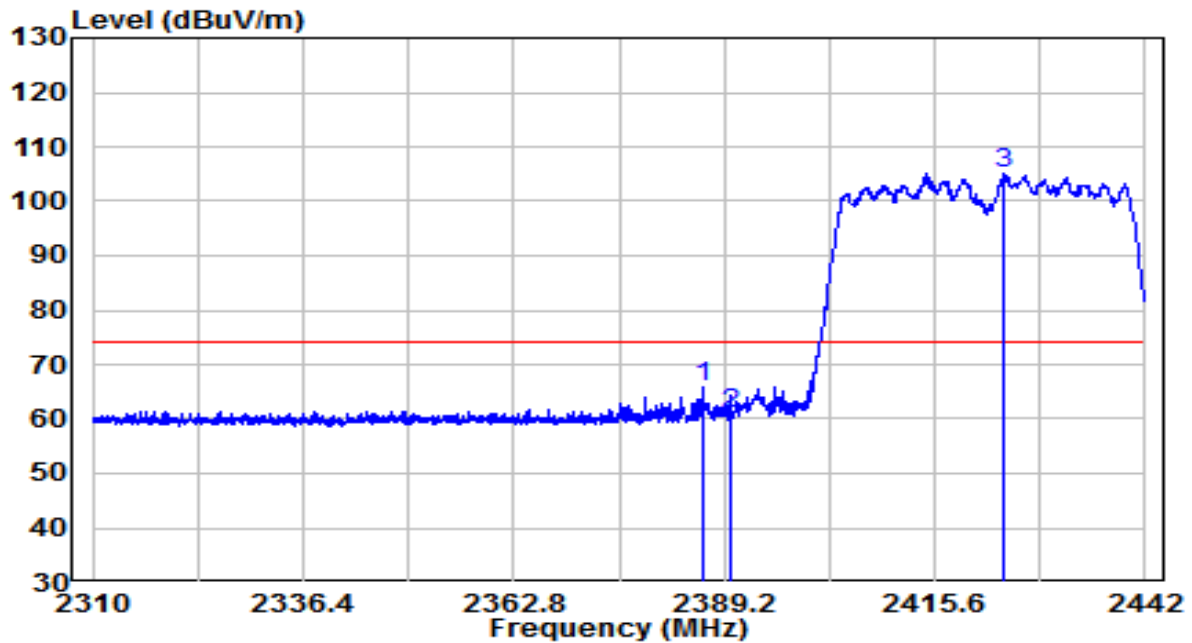


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2386.626	33.59	32.26	65.85	-8.15	74.00	Peak
2	2390.000	28.56	32.27	60.83	-13.17	74.00	Peak
3	*	72.59	32.43	105.02	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

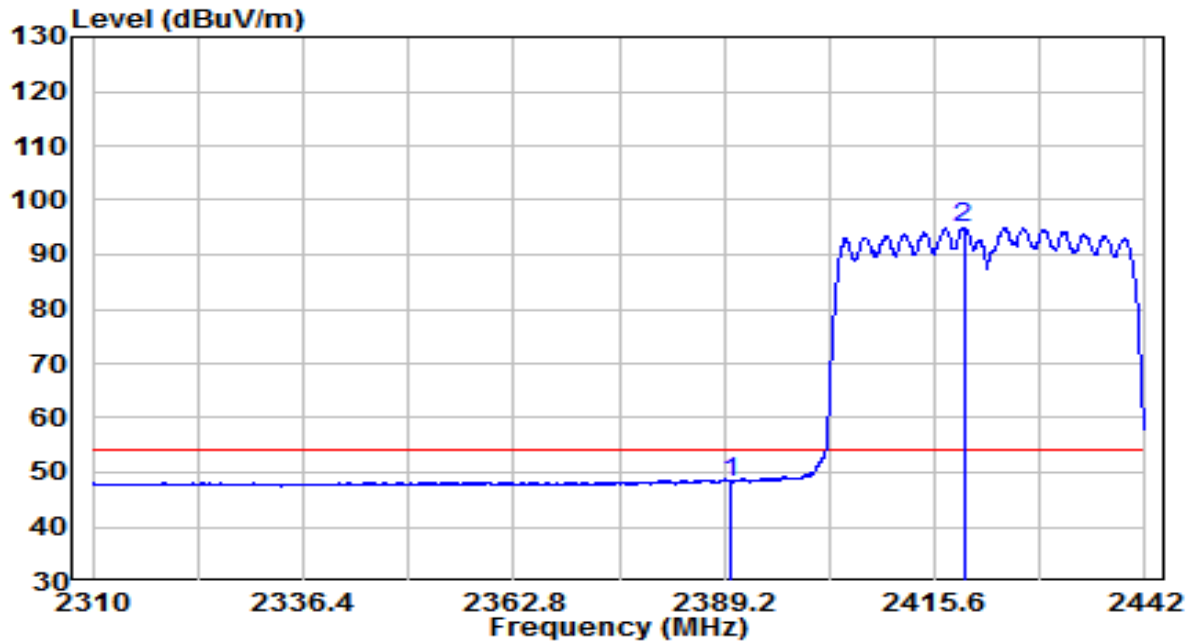


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.90	32.27	48.18	-5.82	54.00	Average
2	* 2419.230	62.66	32.41	95.07	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

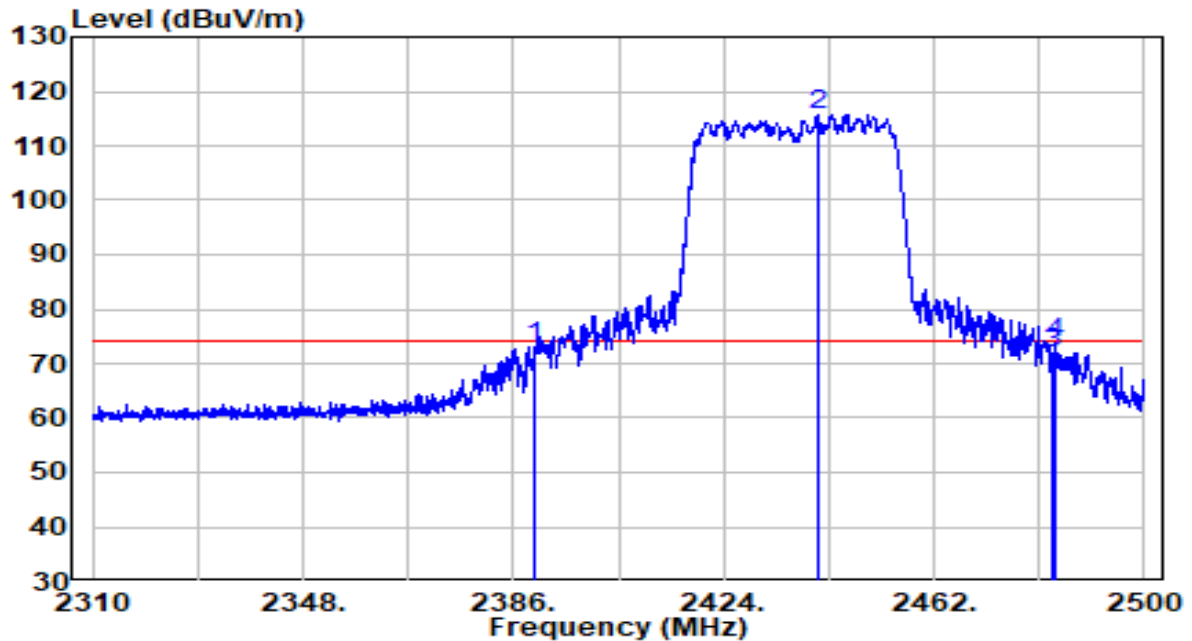


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	40.60	32.27	72.87	-1.13	74.00	Peak
2	* 2441.005	83.30	32.51	115.81	N/A	N/A	Peak
3	2483.500	39.20	32.70	71.90	-2.10	74.00	Peak
4	2483.945	41.10	32.71	73.81	-0.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

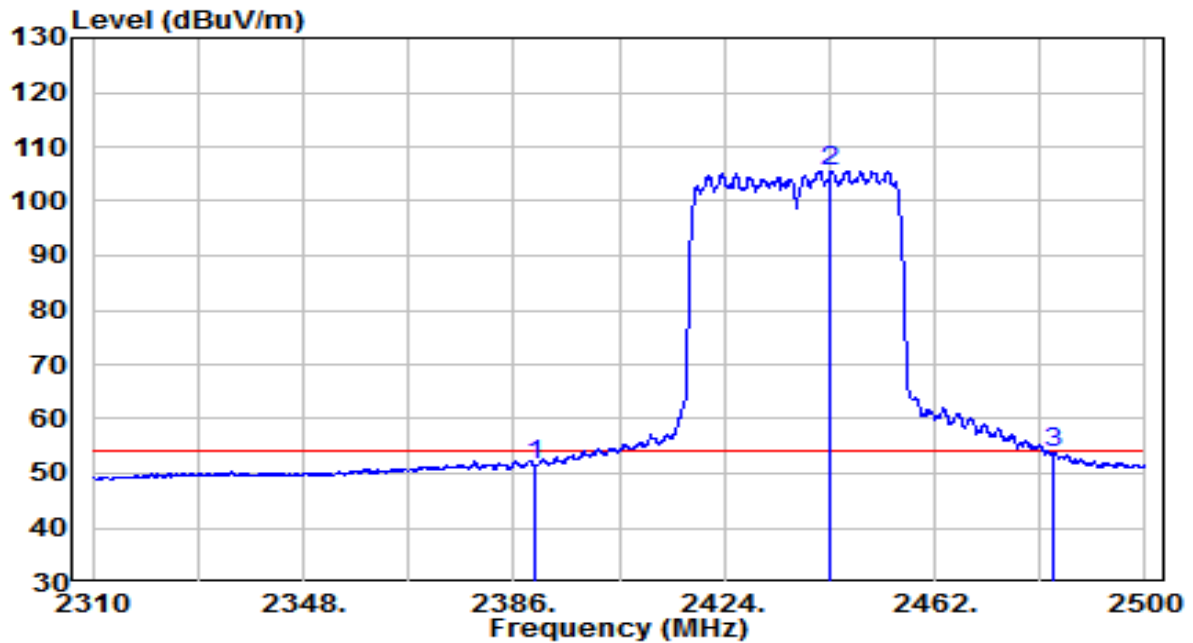


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.06	32.27	51.33	-2.67	54.00	Average
2	* 2443.285	73.07	32.52	105.59	N/A	N/A	Average
3	2483.500	21.13	32.70	53.83	-0.17	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz (CDD Mode)	Test Voltage	120V/60Hz

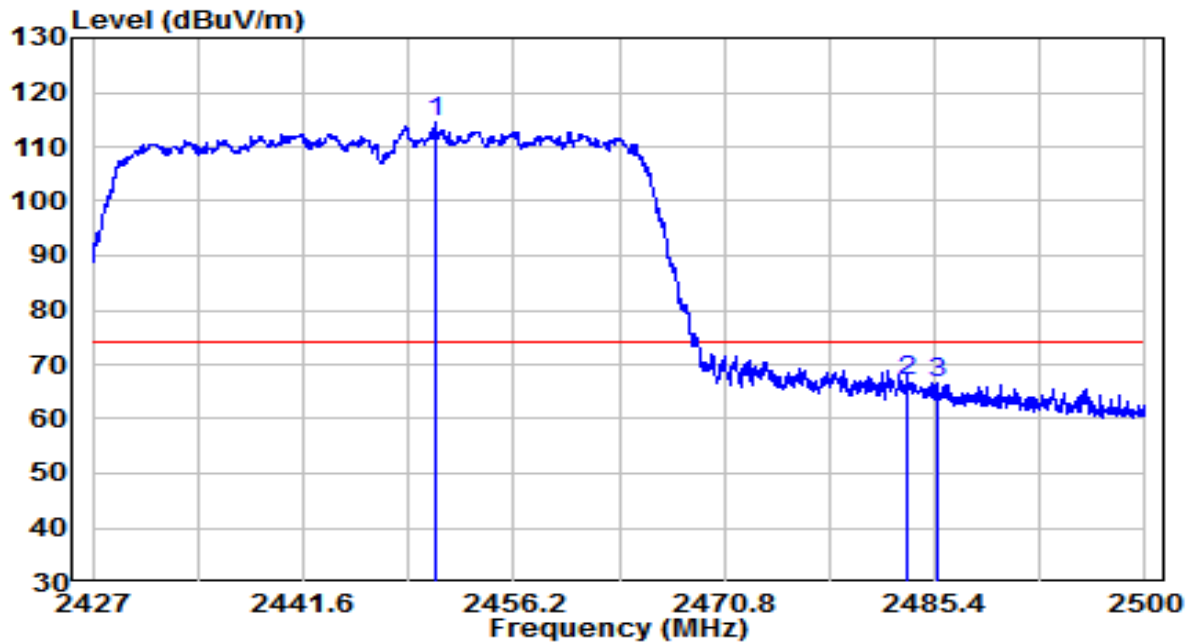


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2450.871	81.93	32.55	114.48	N/A	N/A	Peak
2		2483.502	34.35	32.70	67.05	-6.95	74.00	Peak
3		2485.510	33.96	32.71	66.68	-7.32	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz (CDD Mode)	Test Voltage	120V/60Hz

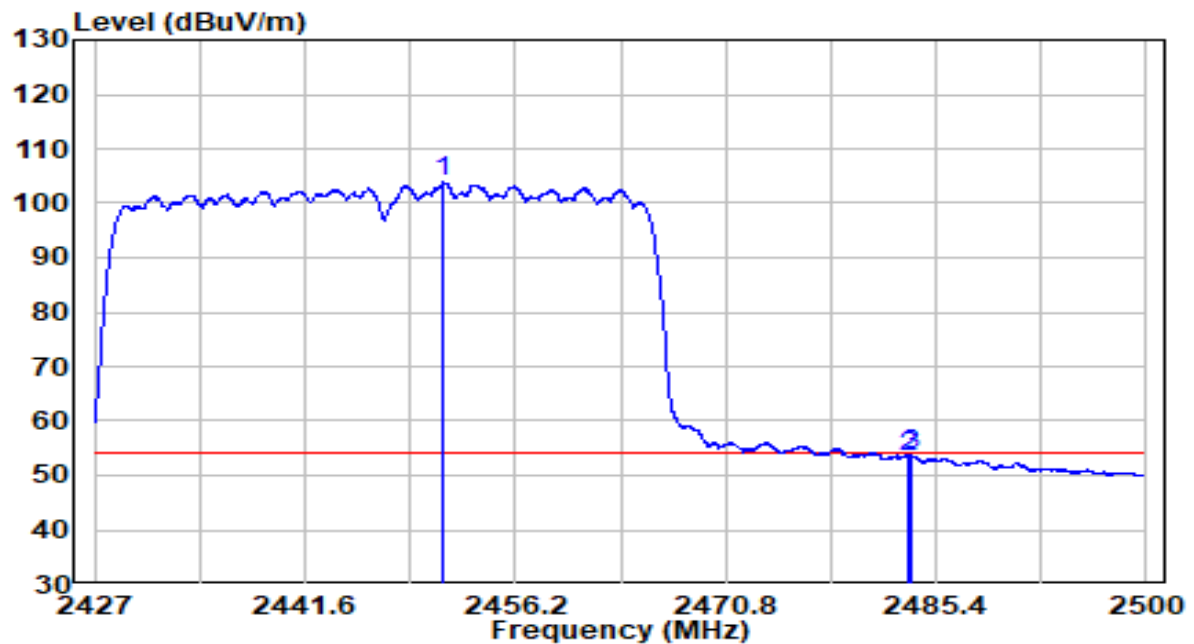


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2451.236	71.23	32.56	103.79	N/A	N/A	Average
2		2483.502	20.73	32.70	53.43	-0.57	54.00	Average
3		2483.648	20.98	32.71	53.68	-0.32	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

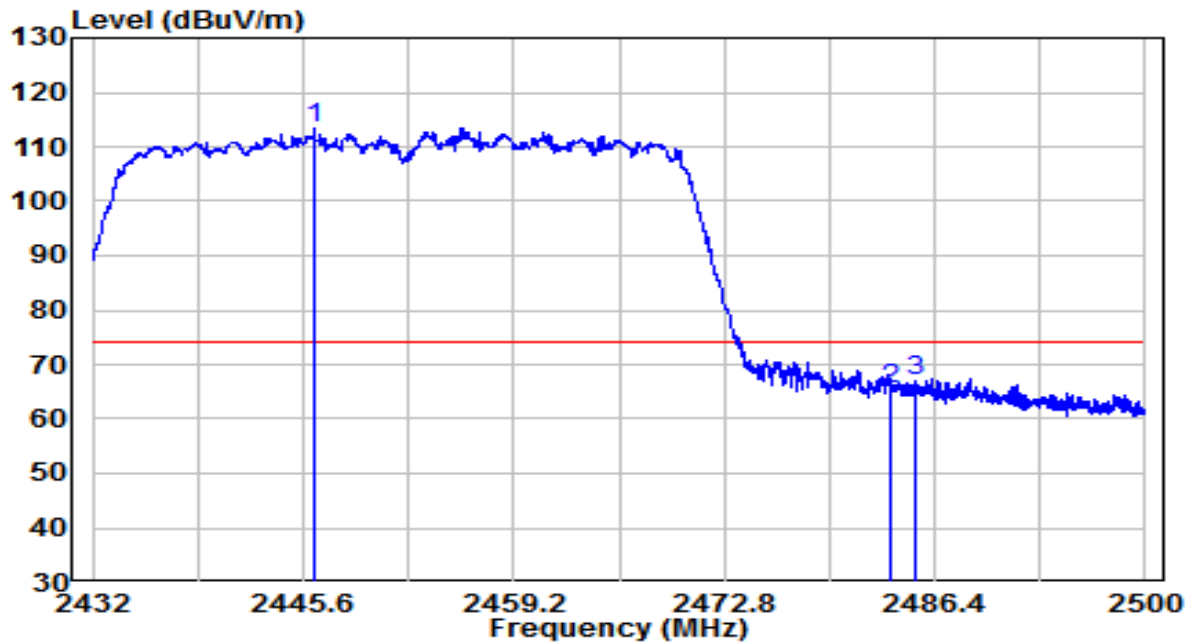


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2446.280	80.95	32.53	113.48	N/A	N/A	Peak
2		2483.500	32.65	32.70	65.35	-8.65	74.00	Peak
3		2485.210	34.26	32.71	66.97	-7.03	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

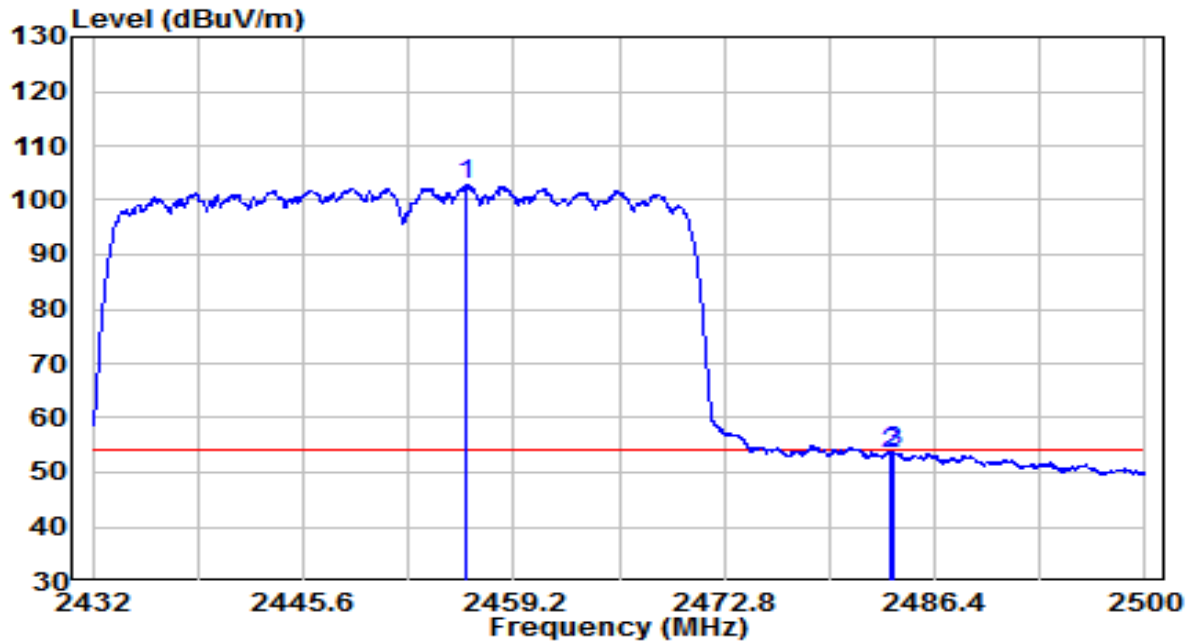


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2456.140	70.26	32.58	102.84	N/A	N/A	Average
2		2483.500	20.76	32.70	53.47	-0.53	54.00	Average
3		2483.714	21.12	32.71	53.82	-0.18	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

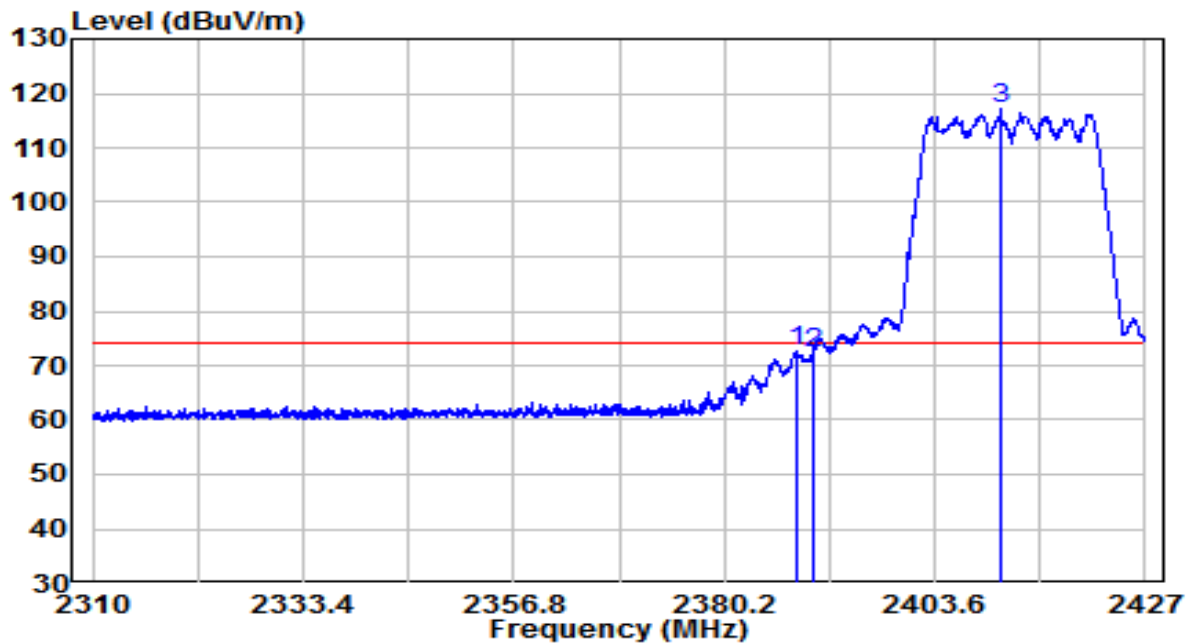


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.332	40.38	32.27	72.65	-1.35	74.00	Peak
2	2390.000	39.84	32.27	72.11	-1.89	74.00	Peak
3	* 2410.971	84.65	32.37	117.02	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

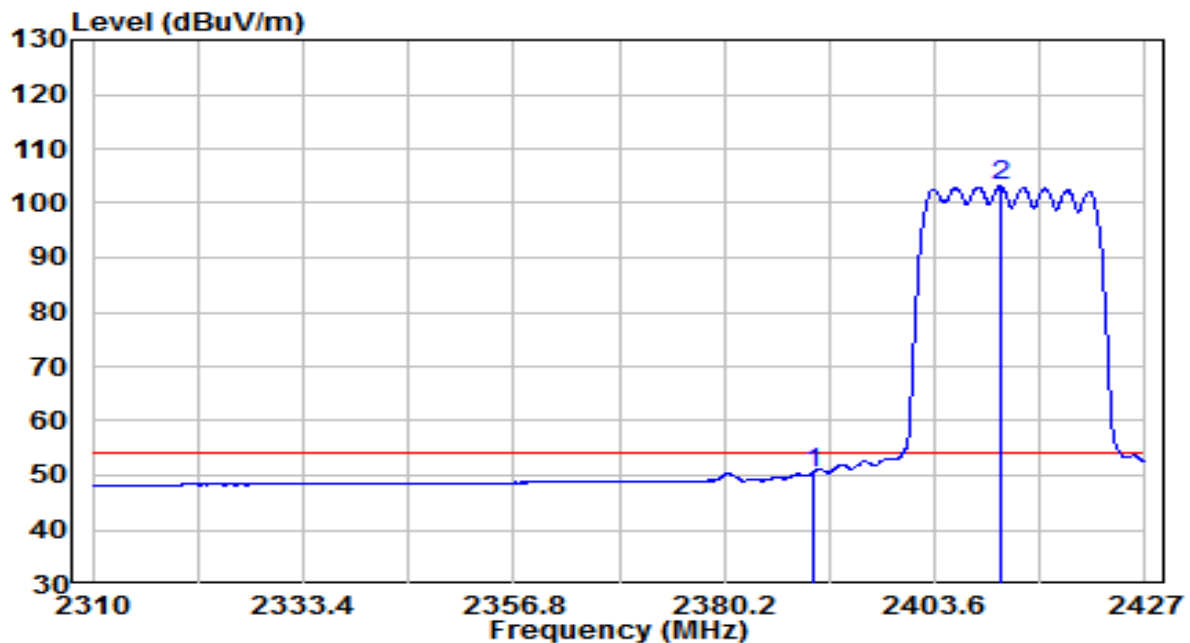


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.29	32.27	50.56	-3.44	54.00	Average
2	* 2410.854	70.73	32.37	103.10	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

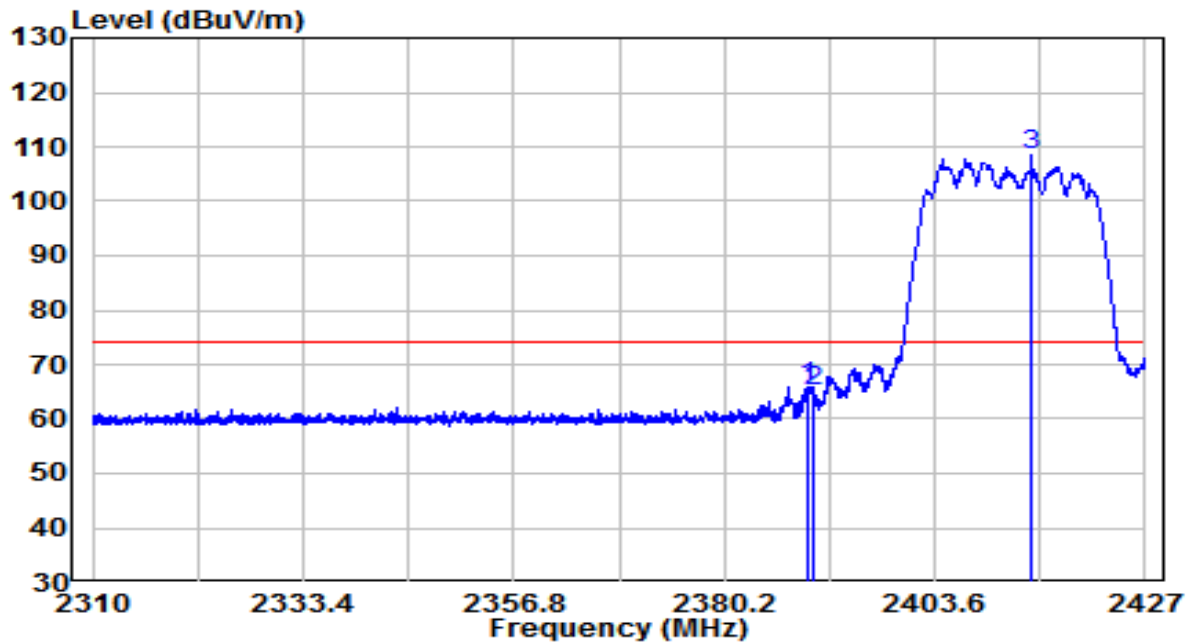


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.560	33.61	32.27	65.88	-8.12	74.00	Peak
2	2390.000	32.93	32.27	65.21	-8.79	74.00	Peak
3	* 2414.364	75.94	32.39	108.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	Test Voltage	120V/60Hz

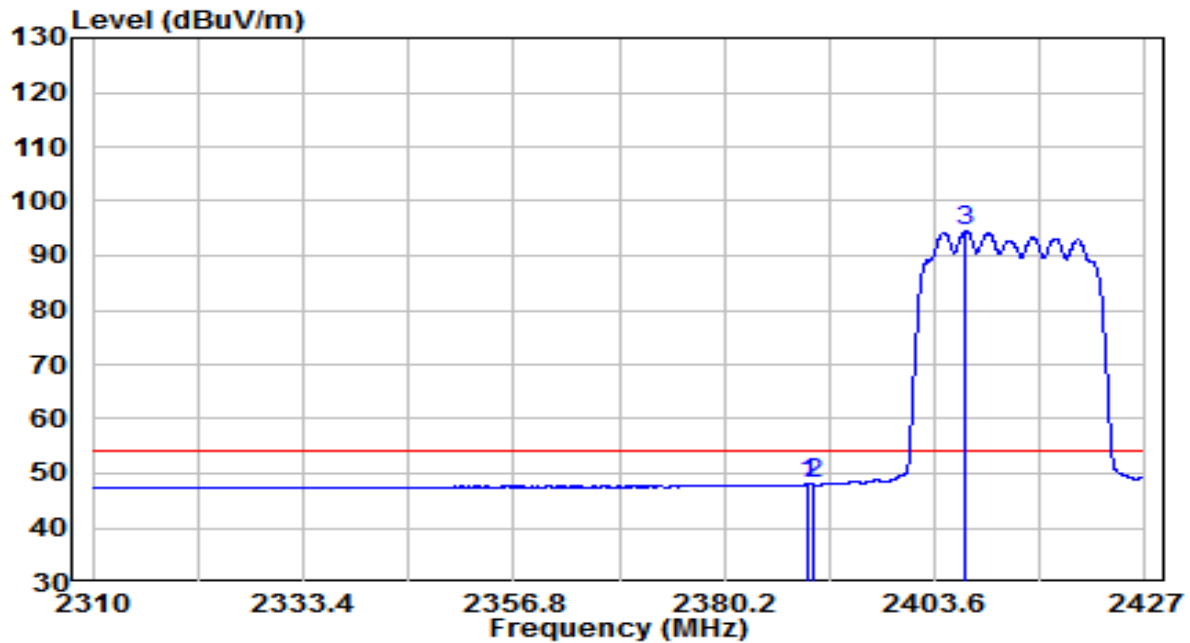


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.560	15.72	32.27	48.00	-6.00	54.00	Average
2	2390.000	15.66	32.27	47.93	-6.07	54.00	Average
3	* 2407.052	62.21	32.35	94.56	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

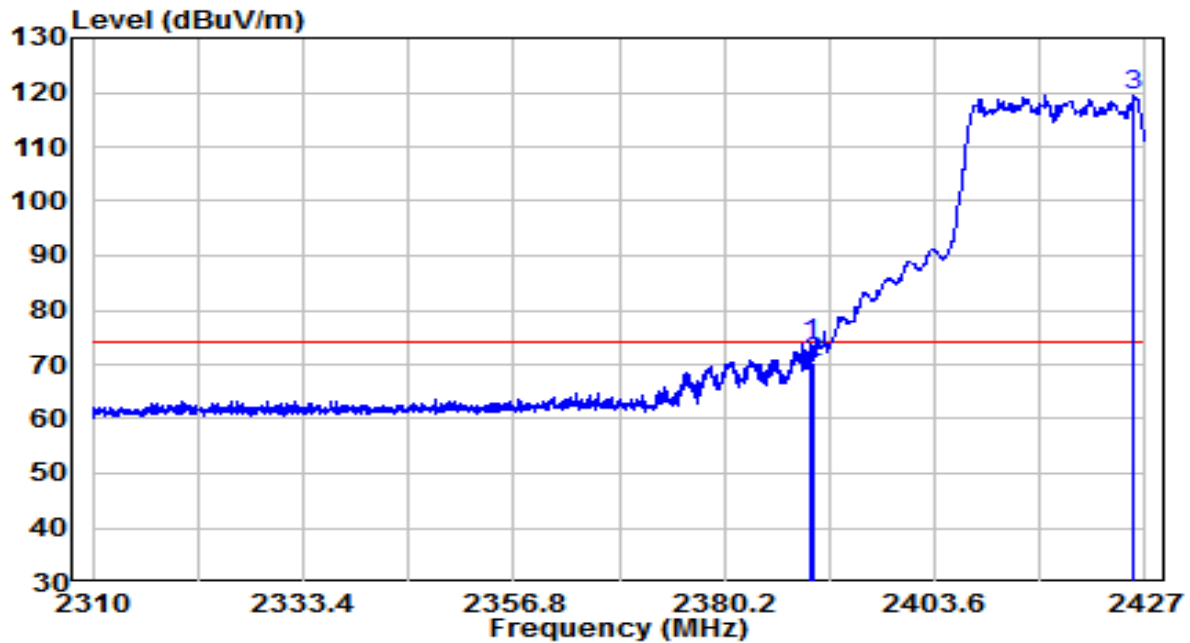


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.853	41.66	32.27	73.94	-0.06	74.00	Peak
2	2390.000	38.14	32.27	70.41	-3.59	74.00	Peak
3	* 2425.771	87.14	32.44	119.58	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2417MHz (CDD Mode)	Test Voltage	120V/60Hz

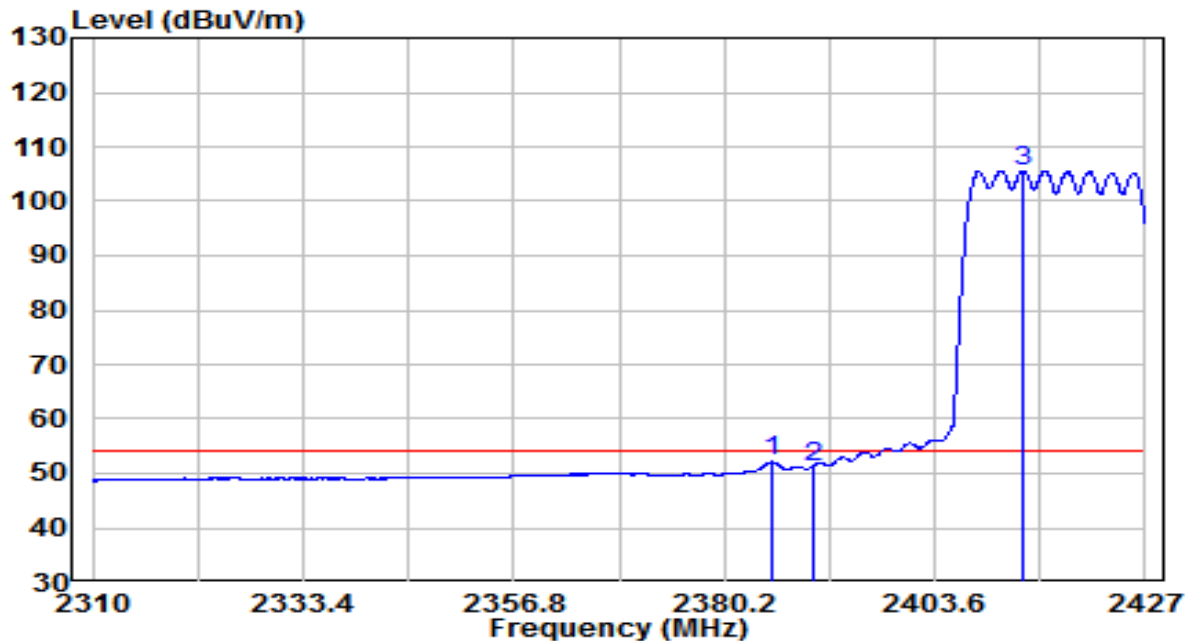


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2385.406	19.83	32.25	52.08	-1.92	54.00	Average
2	2390.000	19.02	32.27	51.29	-2.71	54.00	Average
3	* 2413.428	73.24	32.38	105.62	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

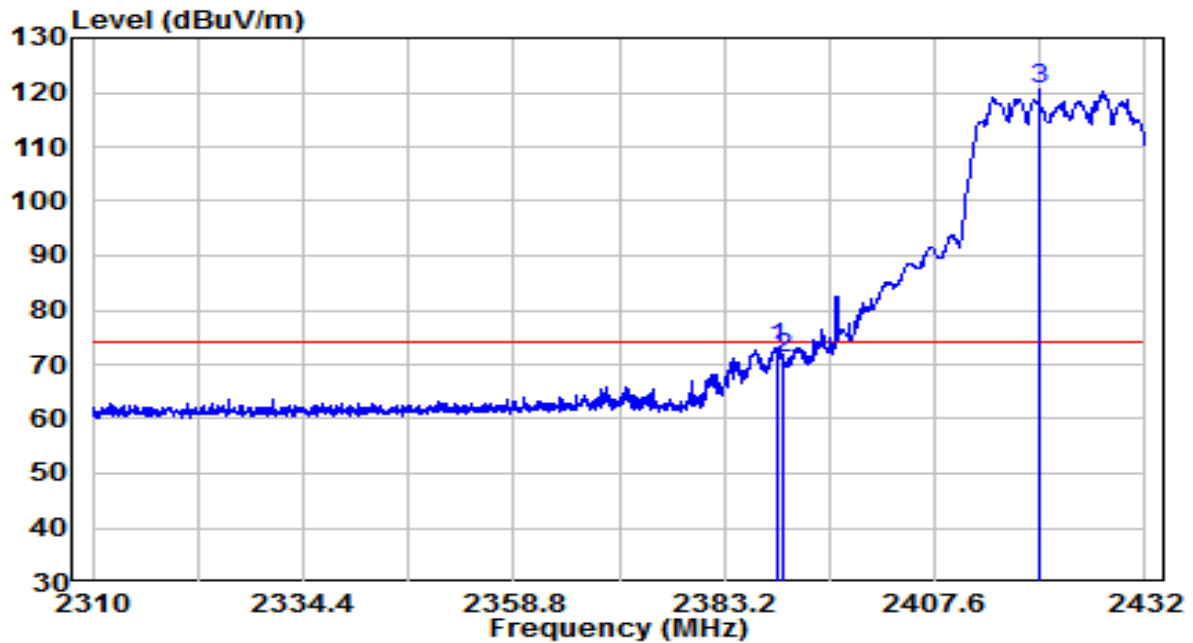


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.300	40.79	32.27	73.06	-0.94	74.00	Peak
2	2390.000	39.00	32.27	71.28	-2.72	74.00	Peak
3	*	88.04	32.41	120.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

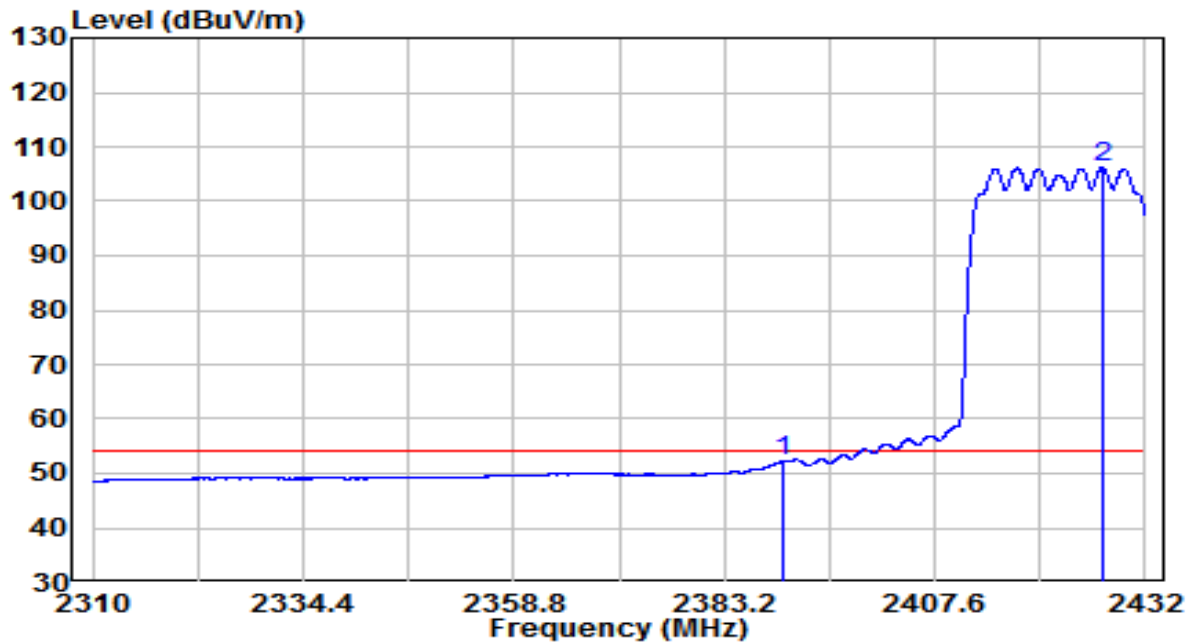


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.98	32.27	52.26	-1.74	54.00	Average
2	* 2426.998	73.71	32.44	106.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

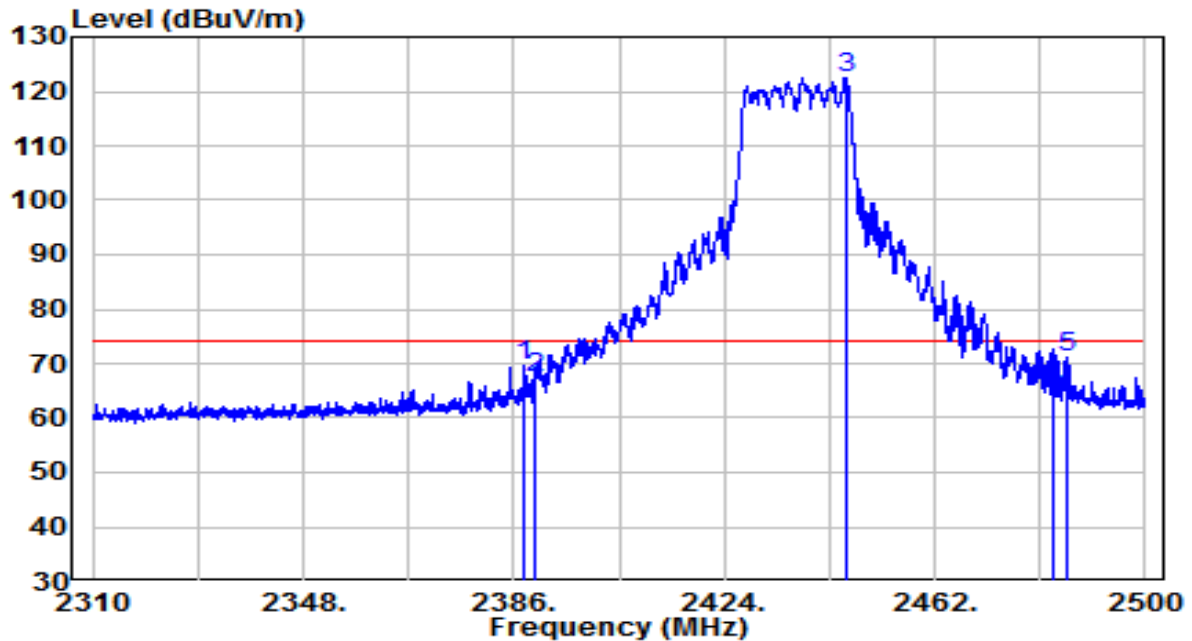


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2387.995	37.31	32.27	69.57	-4.43	74.00	Peak
2	2390.000	35.06	32.27	67.33	-6.67	74.00	Peak
3	* 2446.040	89.95	32.53	122.48	N/A	N/A	Peak
4	2483.500	32.80	32.70	65.50	-8.50	74.00	Peak
5	2486.130	38.34	32.72	71.05	-2.95	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

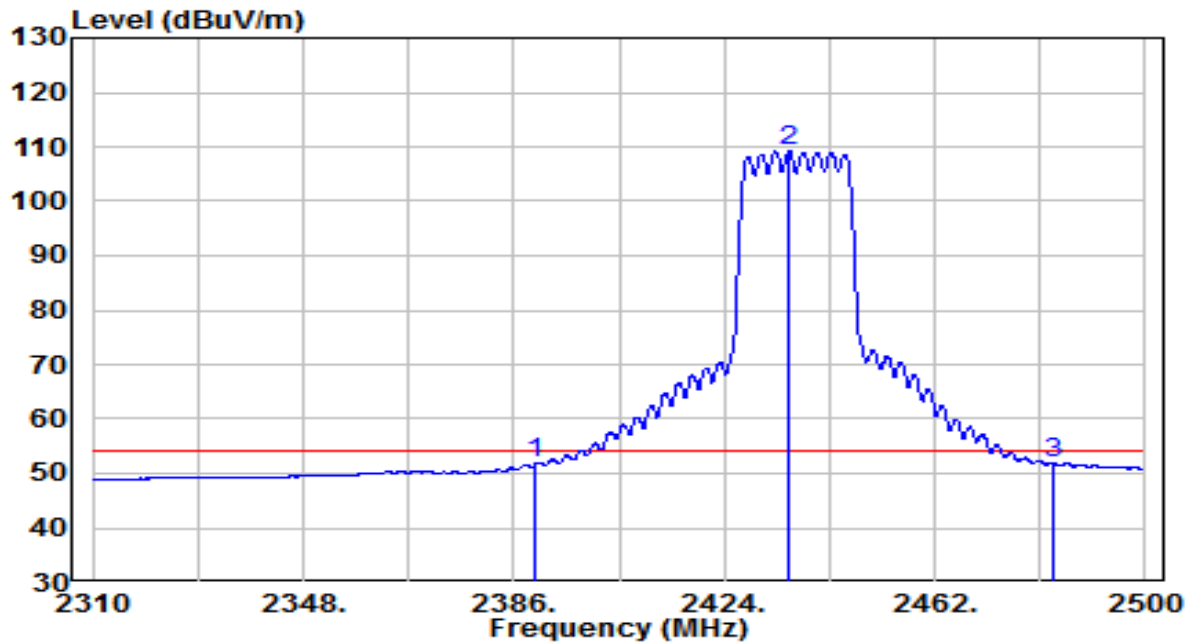


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.42	32.27	51.70	-2.30	54.00	Average
2	* 2435.780	76.72	32.48	109.20	N/A	N/A	Average
3	2483.500	19.28	32.70	51.99	-2.01	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

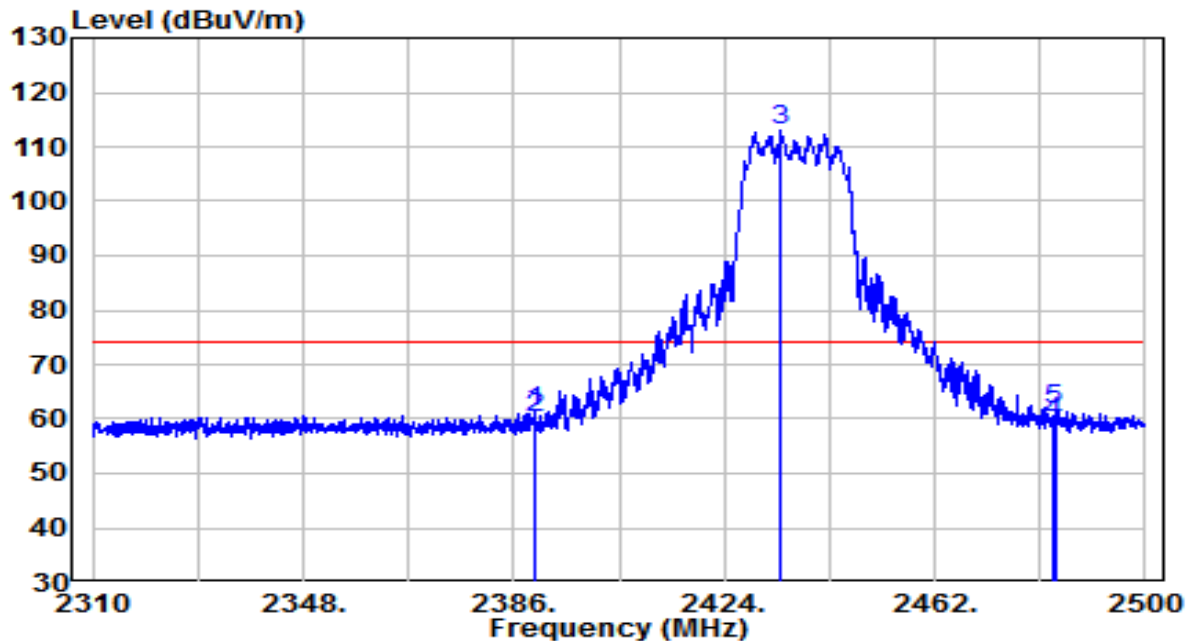


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.705	29.22	32.27	61.49	-12.51	74.00	Peak
2	2390.000	28.09	32.27	60.36	-13.64	74.00	Peak
3	* 2434.070	80.70	32.48	113.18	N/A	N/A	Peak
4	2483.500	26.76	32.70	59.46	-14.54	74.00	Peak
5	2483.660	28.86	32.71	61.57	-12.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

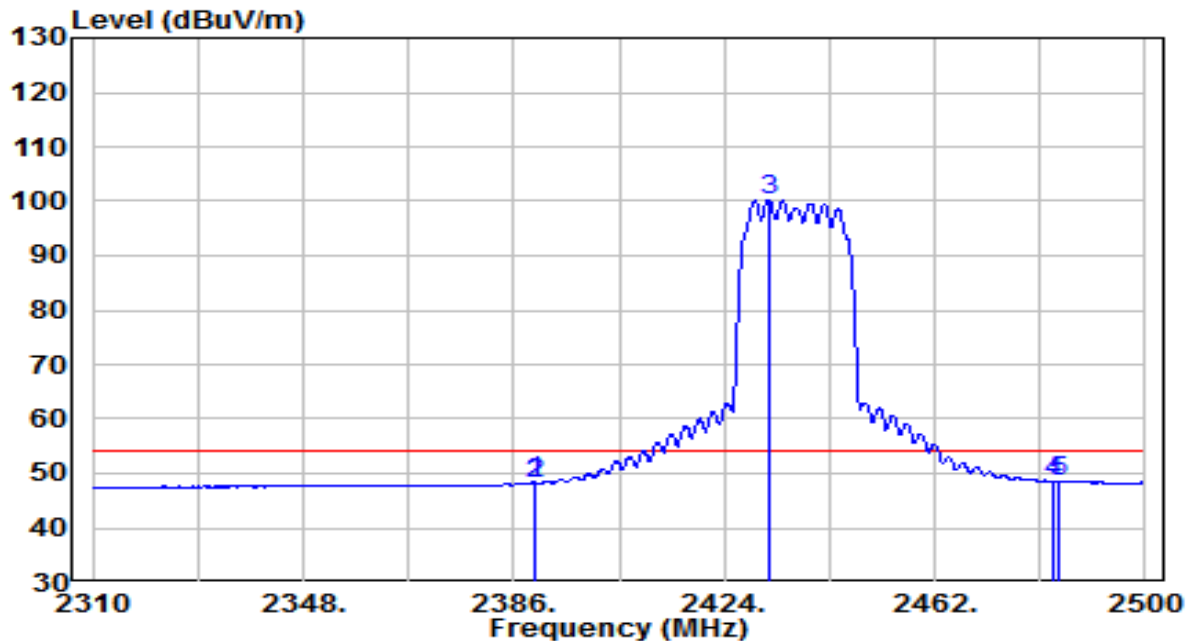


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.610	16.05	32.27	48.32	-5.68	54.00	Average
2	2390.000	15.98	32.27	48.26	-5.74	54.00	Average
3	* 2431.980	67.89	32.47	100.36	N/A	N/A	Average
4	2483.500	15.77	32.70	48.48	-5.52	54.00	Average
5	2484.325	15.83	32.71	48.54	-5.46	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

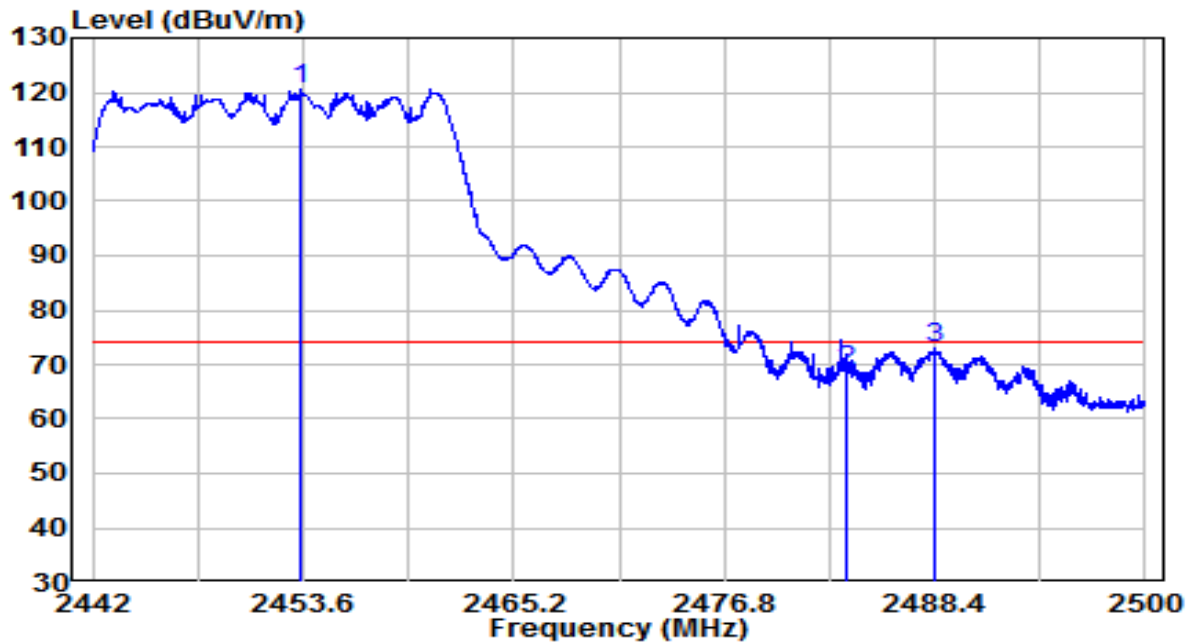


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2453.513	88.07	32.57	120.64	N/A	N/A	Peak
2		2483.500	36.19	32.70	68.89	-5.11	74.00	Peak
3		2488.458	40.27	32.73	73.00	-1.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

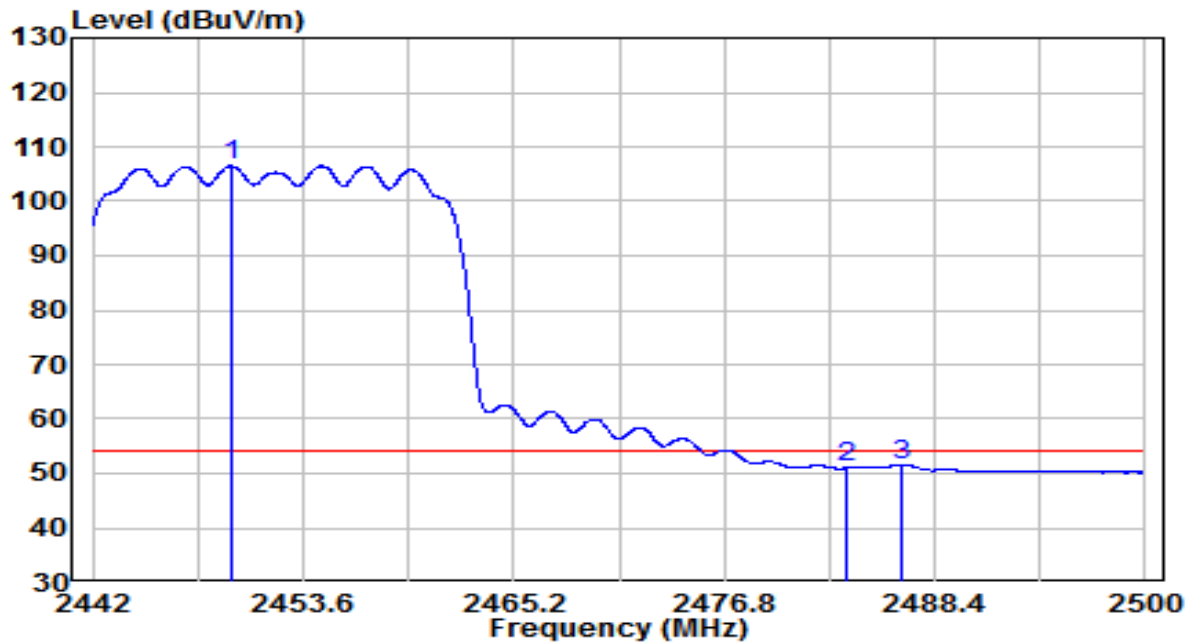


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2449.627	73.91	32.55	106.46	N/A	N/A	Average
2		2483.500	18.26	32.70	50.96	-3.04	54.00	Average
3		2486.602	18.96	32.72	51.68	-2.32	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

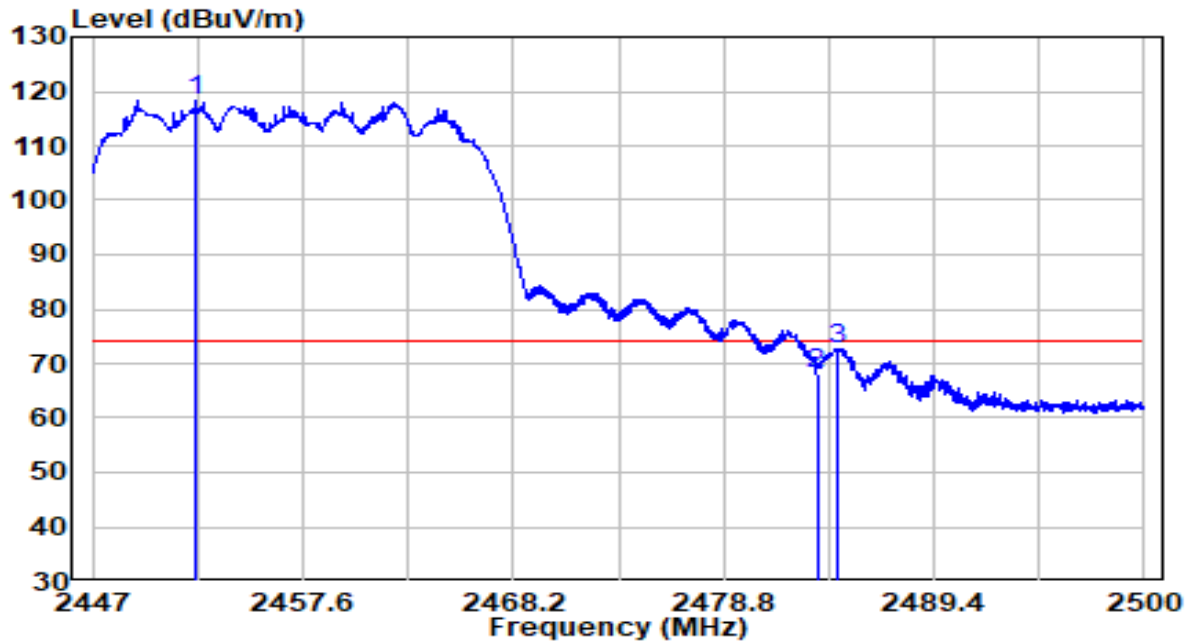


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2452.247	85.61	32.56	118.17	N/A	N/A	Peak
2		2483.500	35.46	32.70	68.16	-5.84	74.00	Peak
3		2484.524	40.09	32.71	72.80	-1.20	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz (CDD Mode)	Test Voltage	120V/60Hz

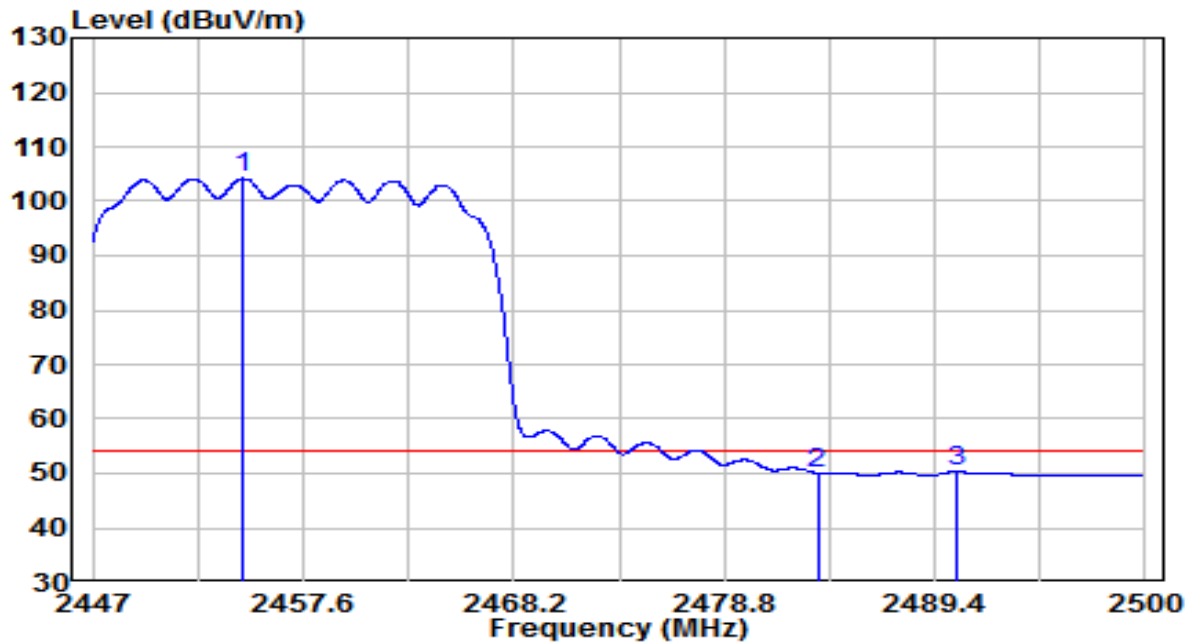


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2454.579	71.58	32.57	104.16	N/A	N/A	Average
2		2483.500	17.33	32.70	50.03	-3.97	54.00	Average
3		2490.566	17.64	32.74	50.38	-3.62	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

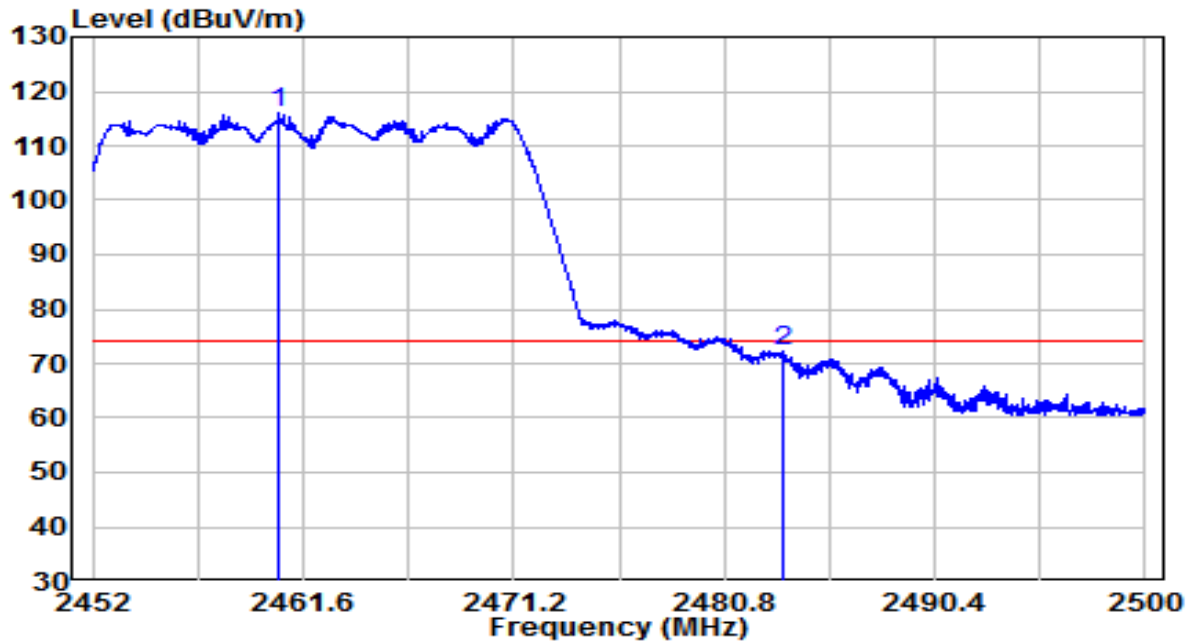


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.520	83.55	32.60	116.15	N/A	N/A	Peak
2		2483.500	39.43	32.70	72.14	-1.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

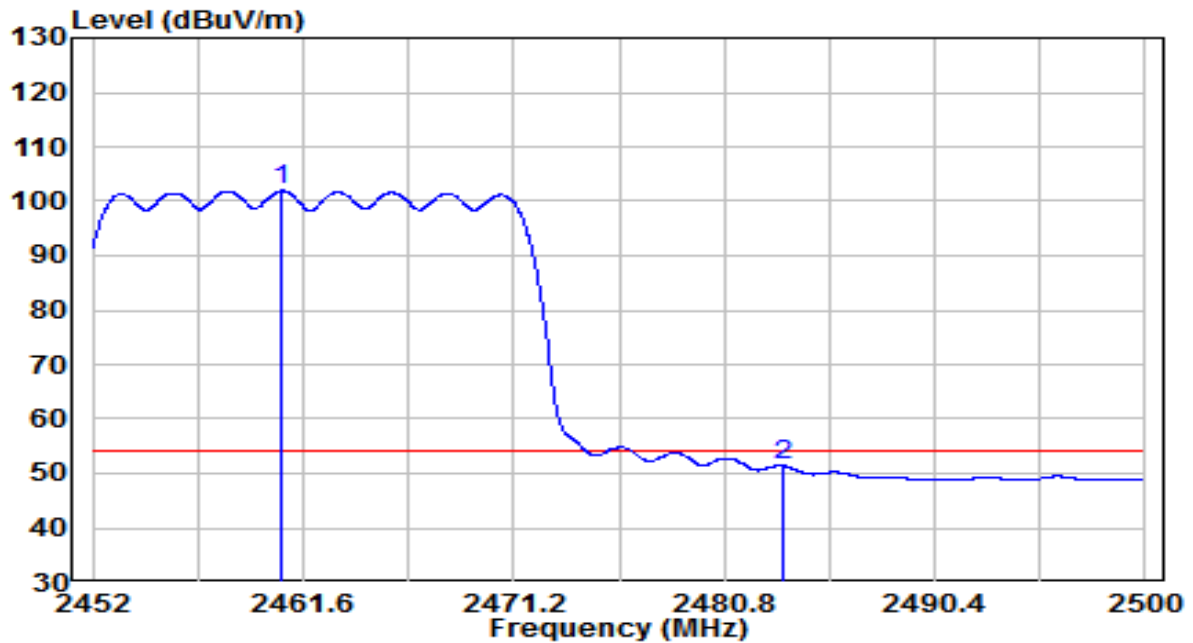


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.640	69.32	32.60	101.92	N/A	N/A	Average
2		2483.500	18.68	32.70	51.38	-2.62	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

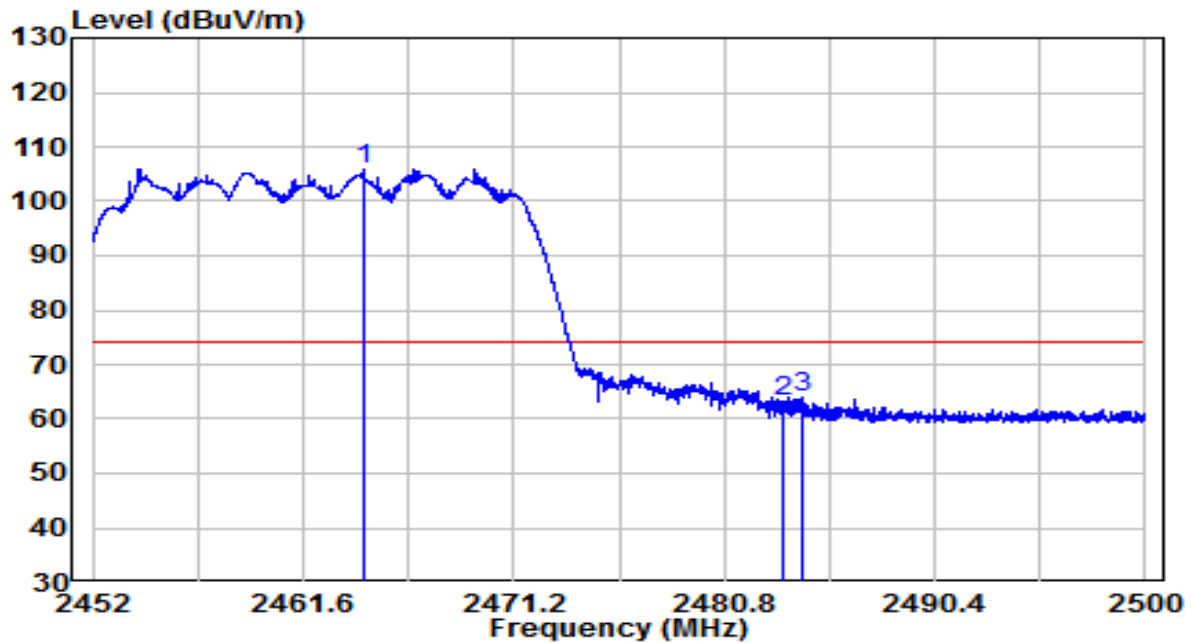


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2464.336	73.41	32.62	106.03	N/A	N/A	Peak
2		2483.500	30.46	32.70	63.16	-10.84	74.00	Peak
3		2484.328	31.14	32.71	63.85	-10.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	Test Voltage	120V/60Hz

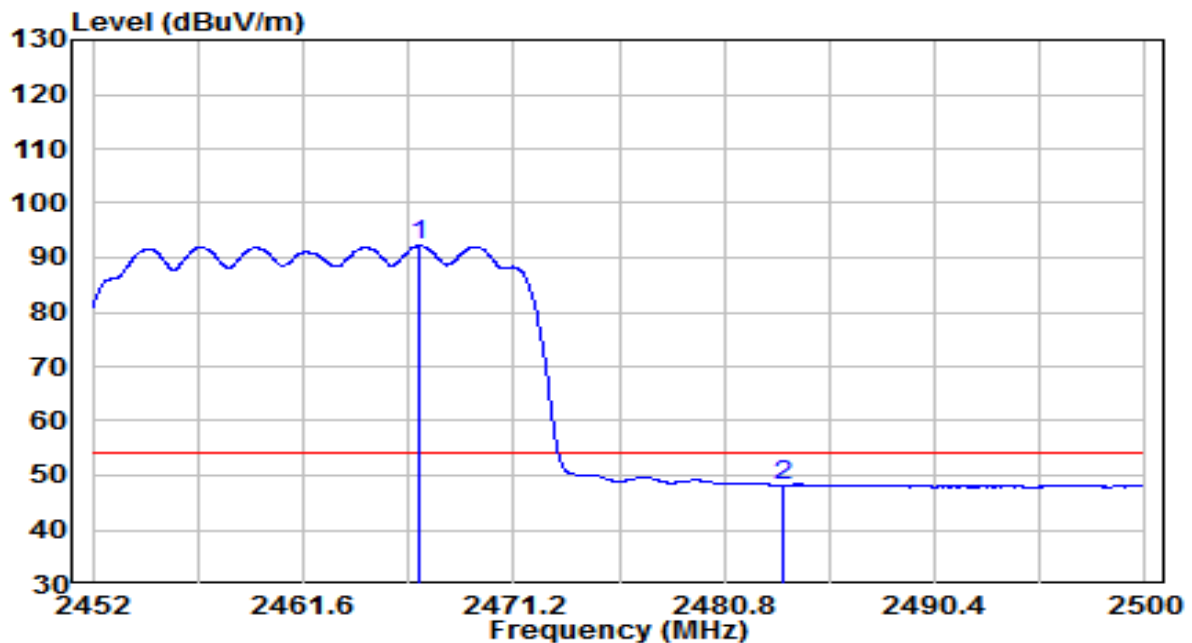


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2466.904	59.54	32.63	92.17	N/A	N/A	Average
2		2483.500	15.48	32.70	48.19	-5.81	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

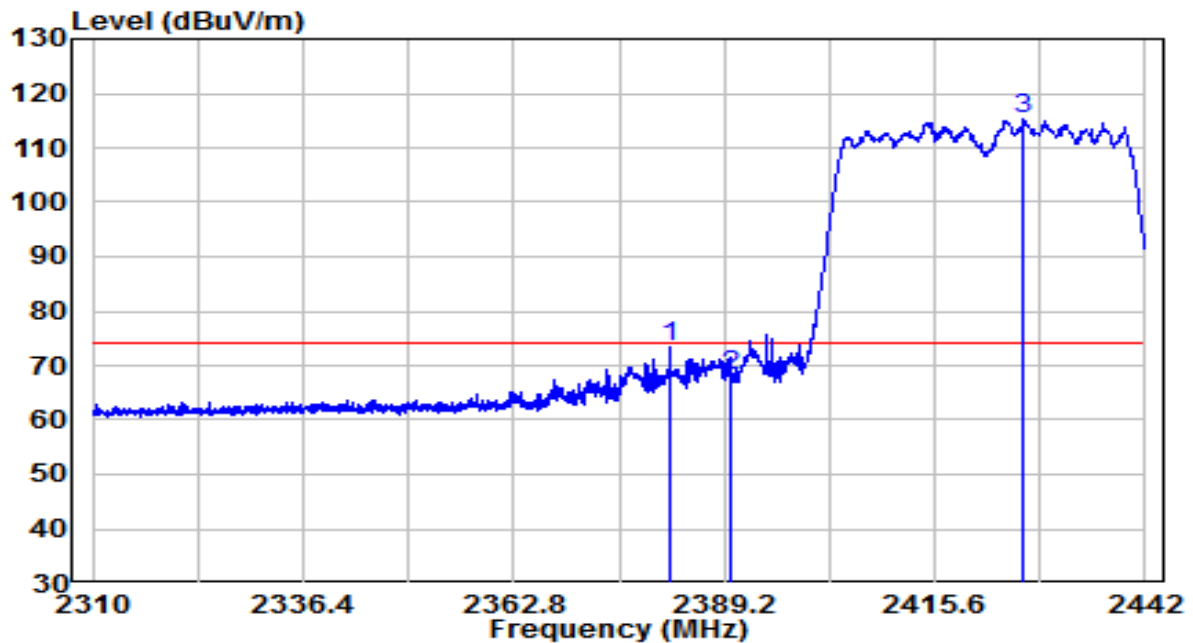


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2382.336	41.18	32.24	73.42	-0.58	74.00	Peak
2	2390.000	35.81	32.27	68.08	-5.92	74.00	Peak
3	* 2426.820	82.98	32.44	115.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

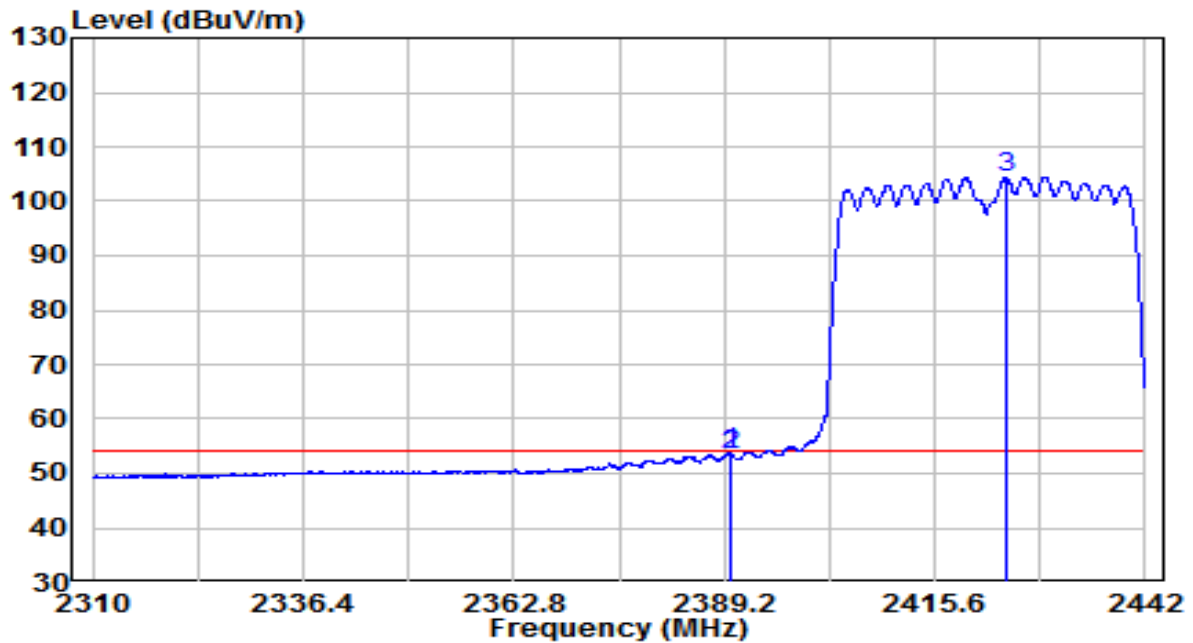


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.860	21.42	32.27	53.69	-0.31	54.00	Average
2	2390.000	21.27	32.27	53.55	-0.45	54.00	Average
3	* 2424.510	71.99	32.43	104.42	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

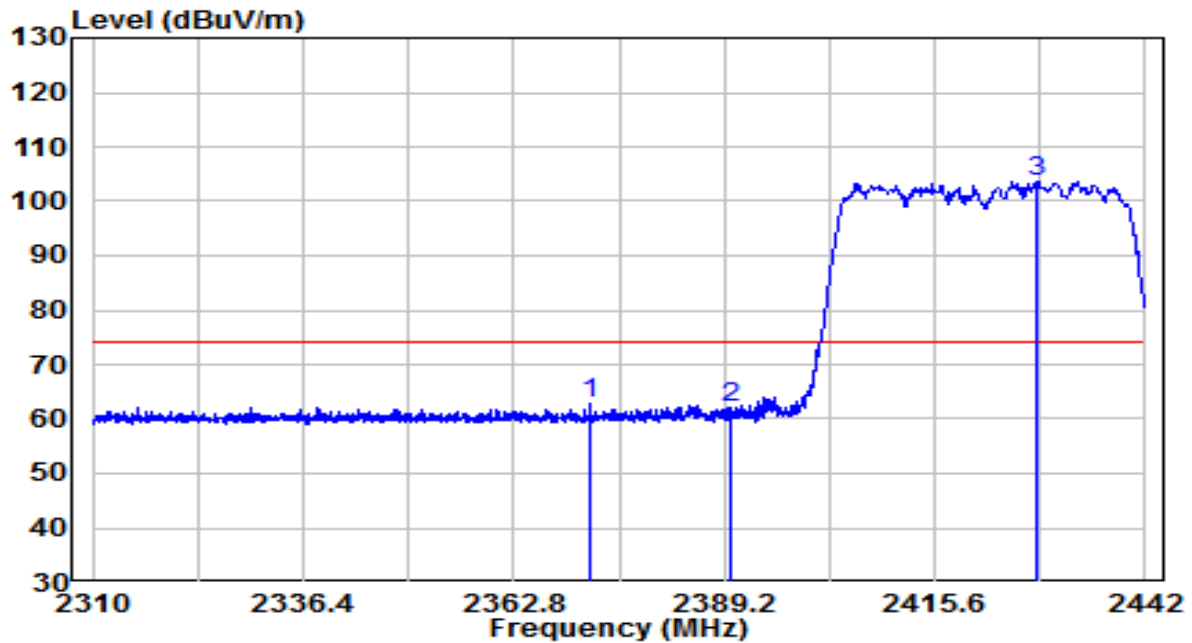


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2372.370	30.48	32.19	62.68	-11.32	74.00	Peak
2	2390.000	29.67	32.27	61.95	-12.05	74.00	Peak
3	* 2428.338	71.23	32.45	103.68	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	Test Voltage	120V/60Hz

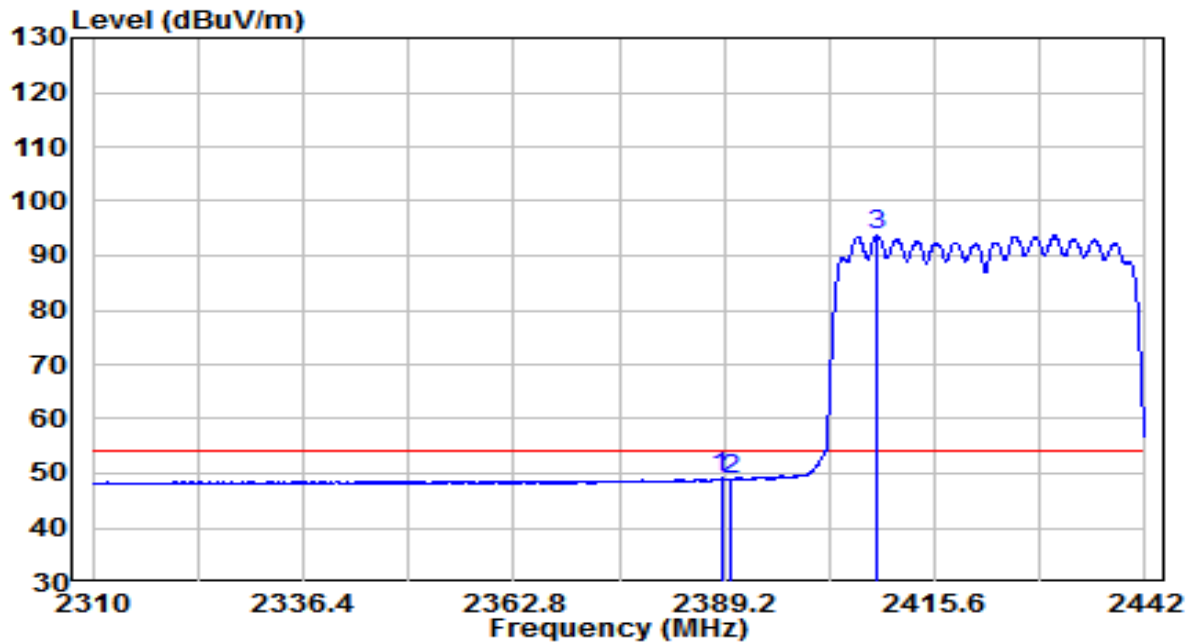


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.804	16.86	32.27	49.13	-4.87	54.00	Average
2	2390.000	16.56	32.27	48.83	-5.17	54.00	Average
3	* 2408.340	61.28	32.36	93.64	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

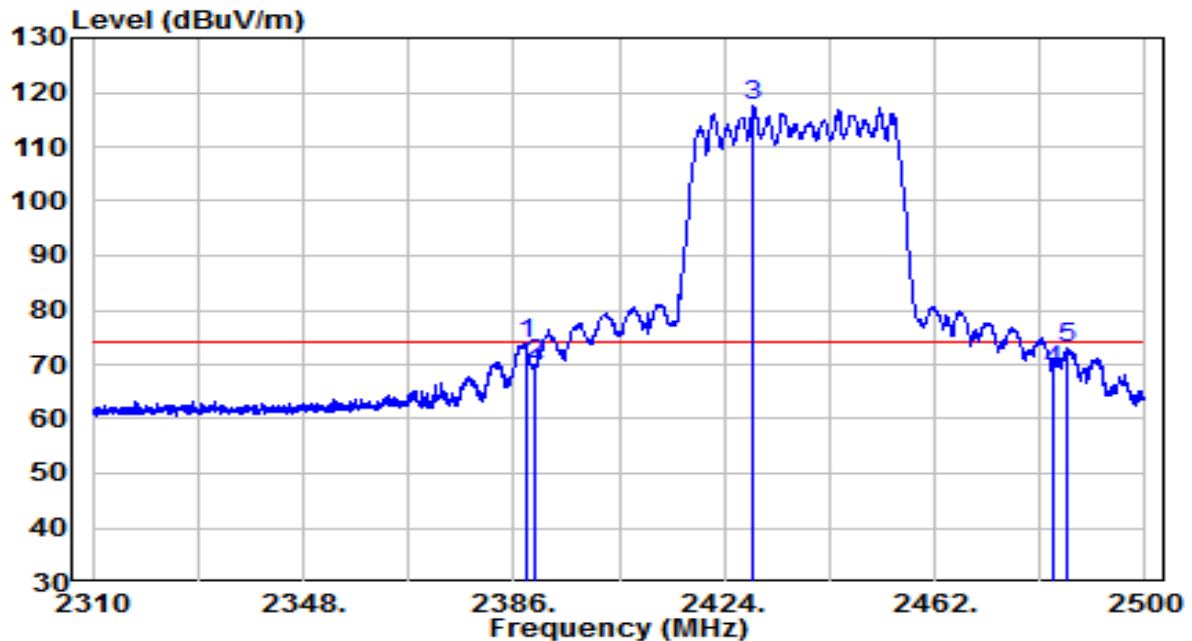


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.470	41.51	32.27	73.78	-0.22	74.00	Peak
2	2390.000	37.59	32.27	69.86	-4.14	74.00	Peak
3	* 2429.225	85.03	32.45	117.48	N/A	N/A	Peak
4	2483.500	36.19	32.70	68.90	-5.10	74.00	Peak
5	2486.035	40.19	32.72	72.90	-1.10	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

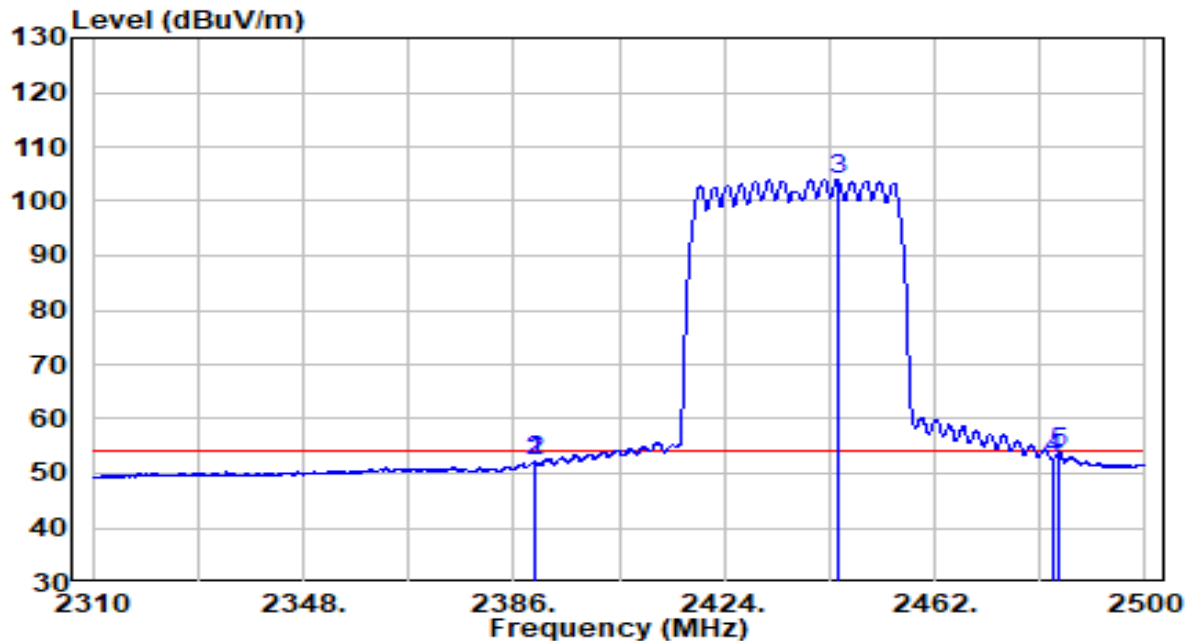


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.705	19.98	32.27	52.25	-1.75	54.00	Average
2	2390.000	19.83	32.27	52.10	-1.90	54.00	Average
3	* 2444.425	71.43	32.52	103.95	N/A	N/A	Average
4	2483.500	20.13	32.70	52.83	-1.17	54.00	Average
5	2484.420	21.15	32.71	53.86	-0.14	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

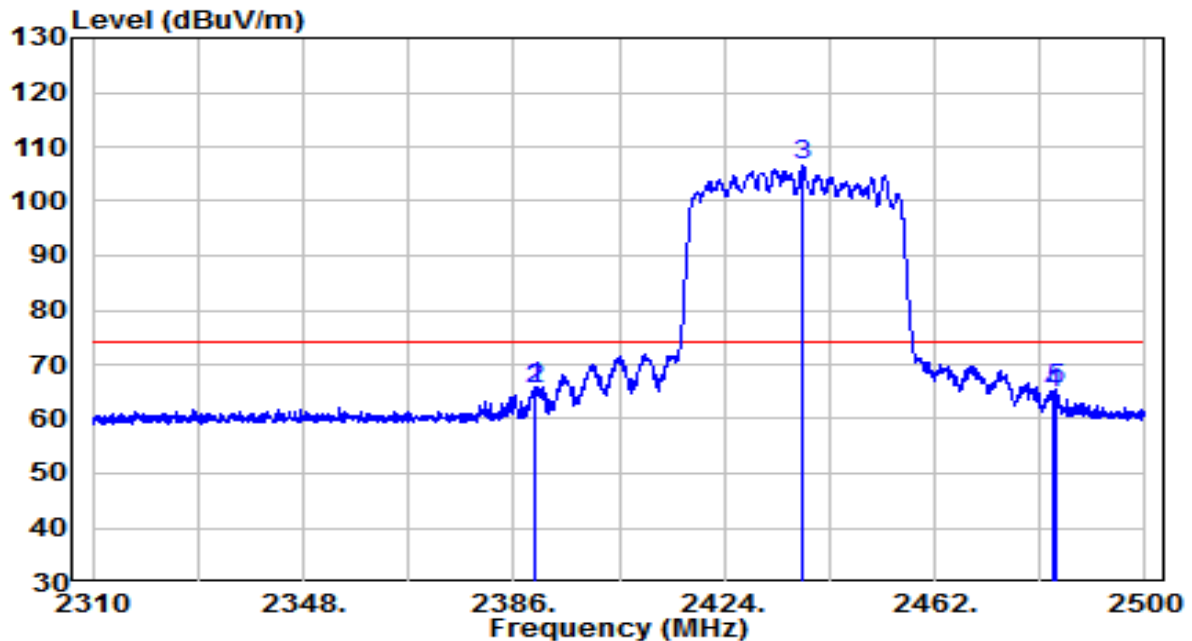


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2389.895	33.59	32.27	65.86	-8.14	74.00	Peak
2	2390.000	33.27	32.27	65.55	-8.45	74.00	Peak
3	* 2438.250	73.99	32.50	106.48	N/A	N/A	Peak
4	2483.500	31.84	32.70	64.54	-9.46	74.00	Peak
5	2483.850	32.72	32.71	65.42	-8.58	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	Test Voltage	120V/60Hz

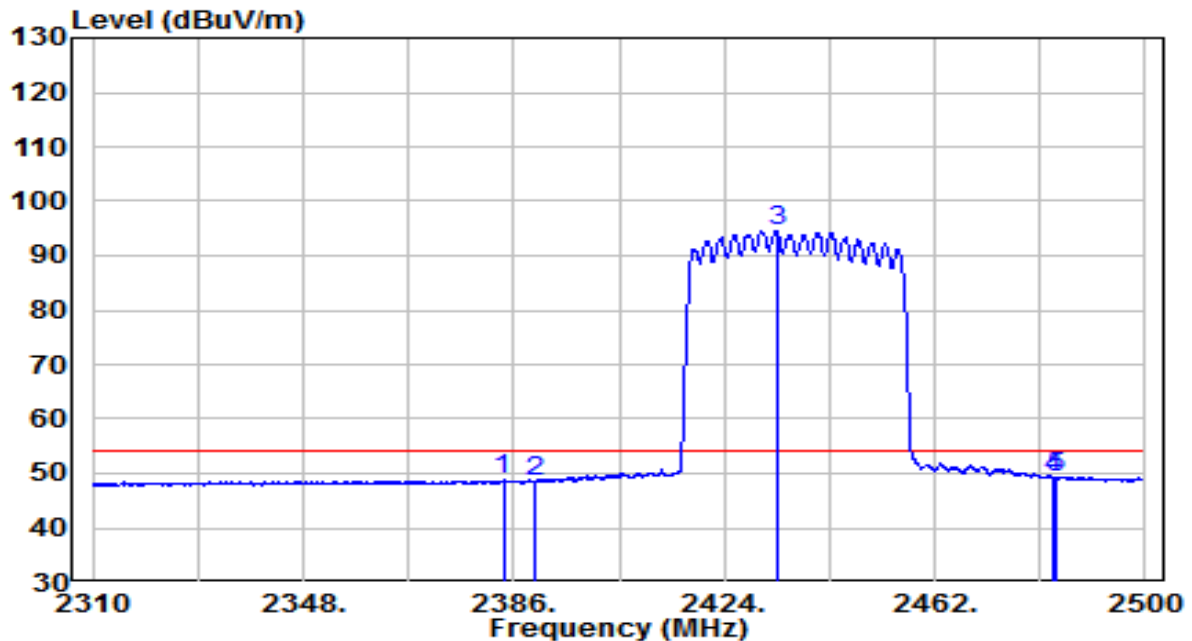


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2384.100	16.47	32.25	48.72	-5.28	54.00	Average
2	2390.000	16.18	32.27	48.46	-5.54	54.00	Average
3	* 2433.405	62.04	32.47	94.52	N/A	N/A	Average
4	2483.500	16.46	32.70	49.17	-4.83	54.00	Average
5	2483.945	16.60	32.71	49.31	-4.69	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

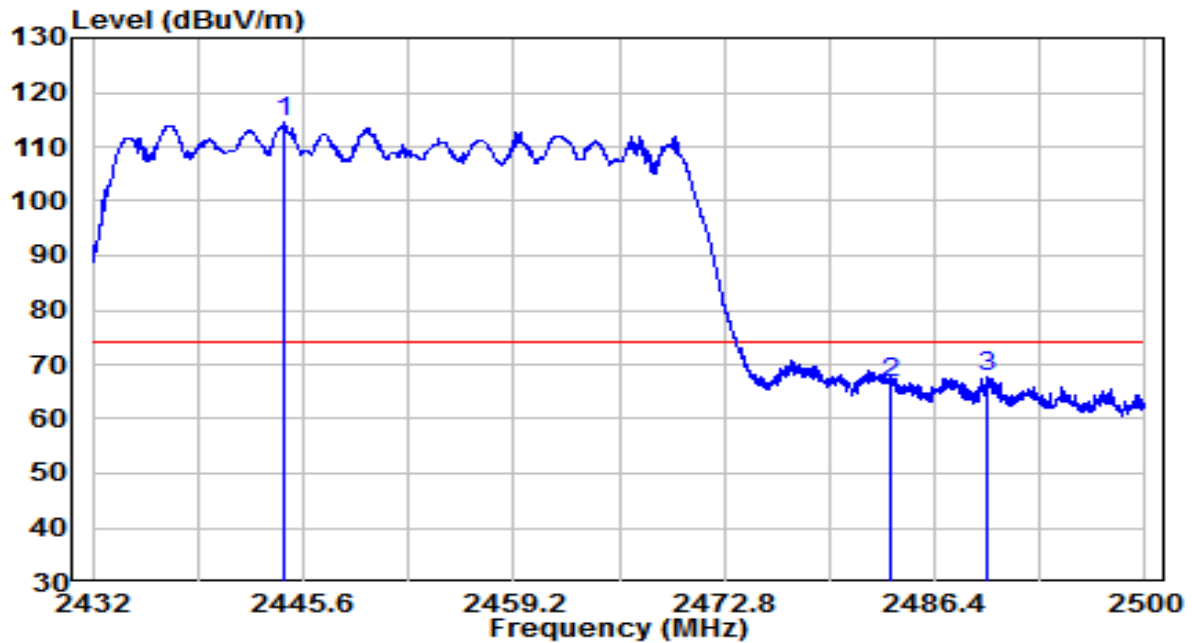


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2444.444	81.90	32.52	114.42	N/A	N/A	Peak
2		2483.500	34.04	32.70	66.75	-7.25	74.00	Peak
3		2489.868	34.85	32.73	67.59	-6.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

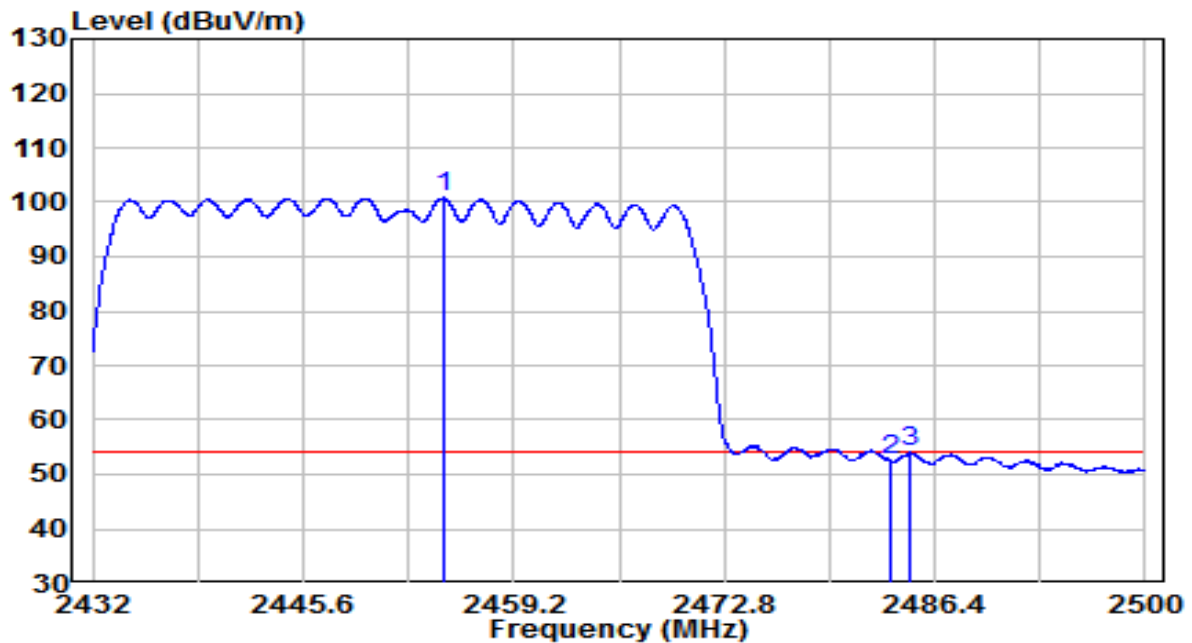


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2454.678	68.19	32.57	100.76	N/A	N/A	Average
2		2483.500	19.94	32.70	52.64	-1.36	54.00	Average
3		2484.870	21.26	32.71	53.97	-0.03	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

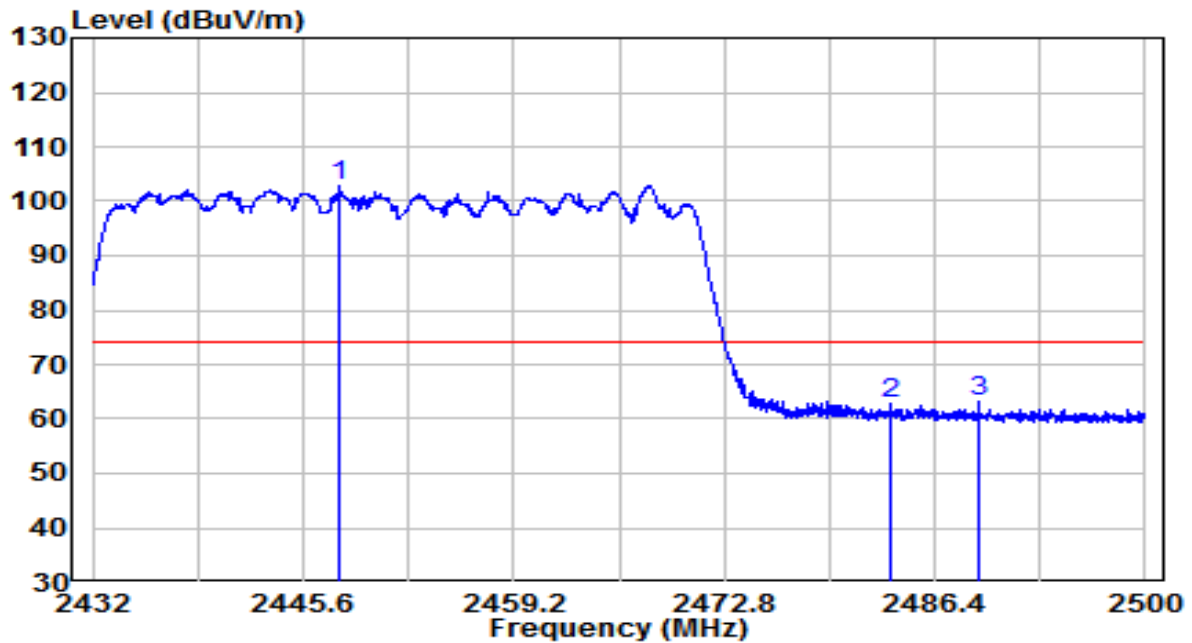


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2447.980	70.41	32.54	102.95	N/A	N/A	Peak
2		2483.500	30.23	32.70	62.93	-11.07	74.00	Peak
3		2489.290	30.43	32.73	63.16	-10.84	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.2°C/43.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	Test Voltage	120V/60Hz

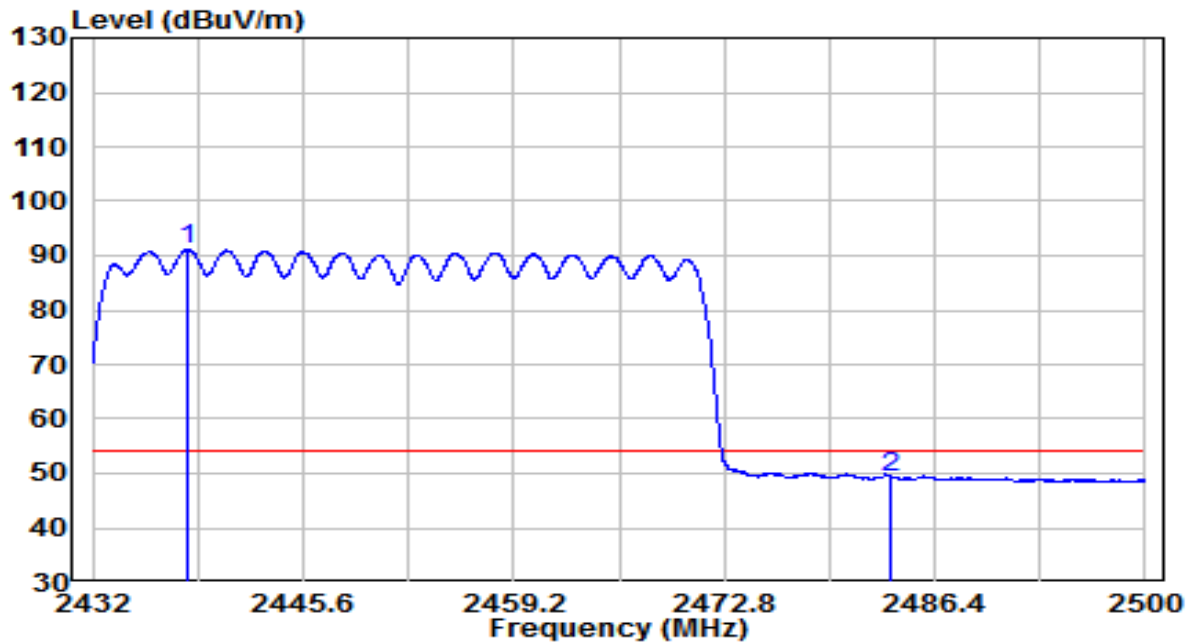


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2438.154	58.66	32.50	91.16	N/A	N/A	Average
2		2483.500	16.71	32.70	49.42	-4.58	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (Beamforming Mode)	Test Voltage	120V/60Hz

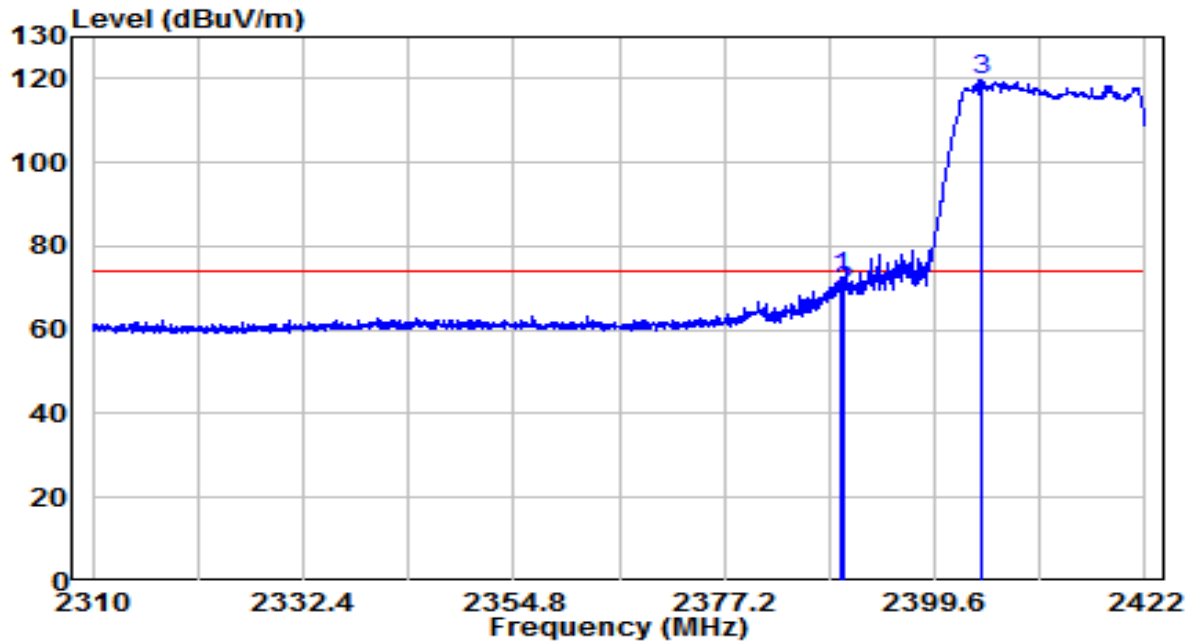


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.520	40.12	32.27	72.39	-1.61	74.00	Peak
2	2390.000	36.91	32.27	69.18	-4.82	74.00	Peak
3	* 2404.640	87.19	32.34	119.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (Beamforming Mode)	Test Voltage	120V/60Hz

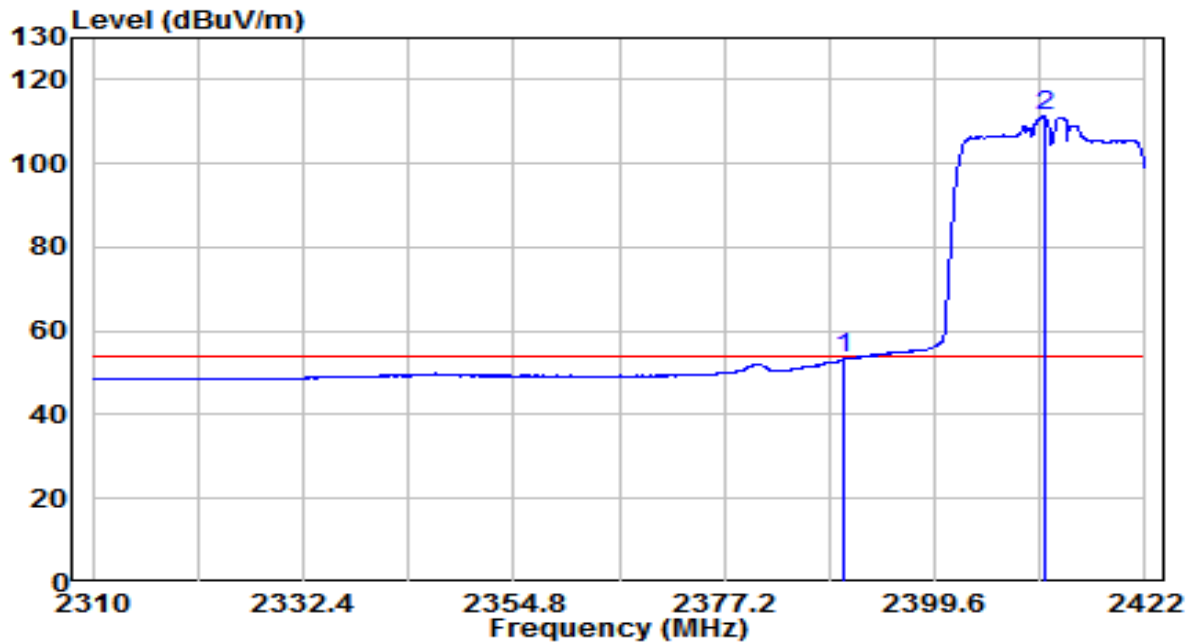


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	21.03	32.27	53.31	-0.69	54.00	Average
2	* 2411.248	79.17	32.37	111.54	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (Beamforming Mode)	Test Voltage	120V/60Hz

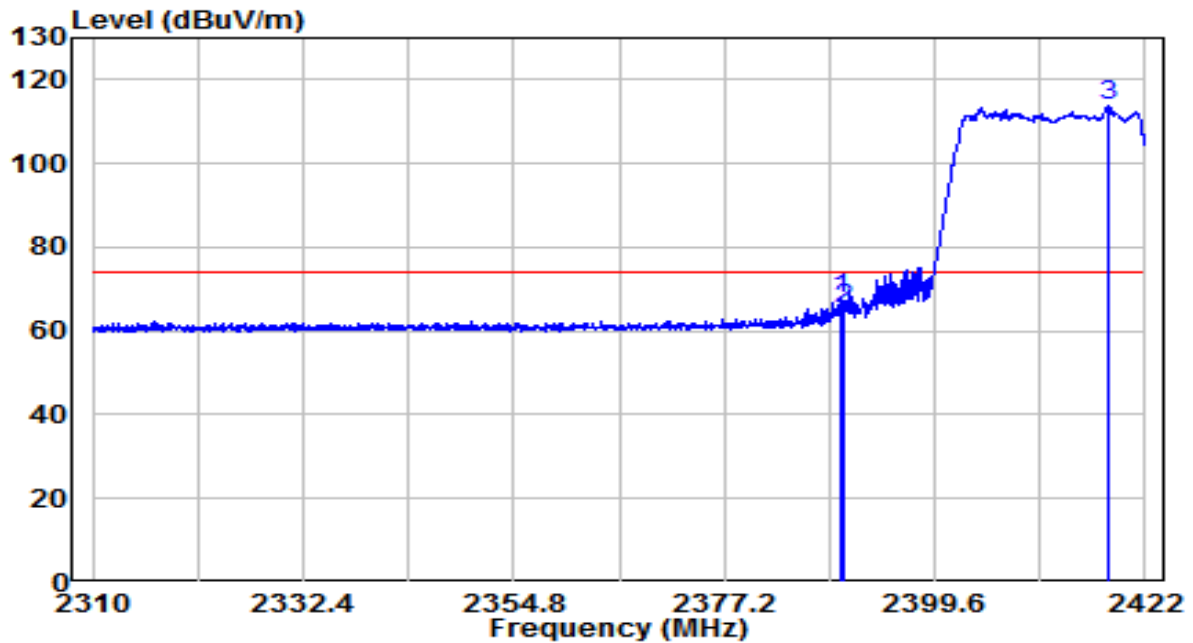


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.632	35.51	32.27	67.79	-6.21	74.00	Peak
2	2390.000	33.11	32.27	65.38	-8.62	74.00	Peak
3	* 2418.192	81.23	32.40	113.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz (Beamforming Mode)	Test Voltage	120V/60Hz

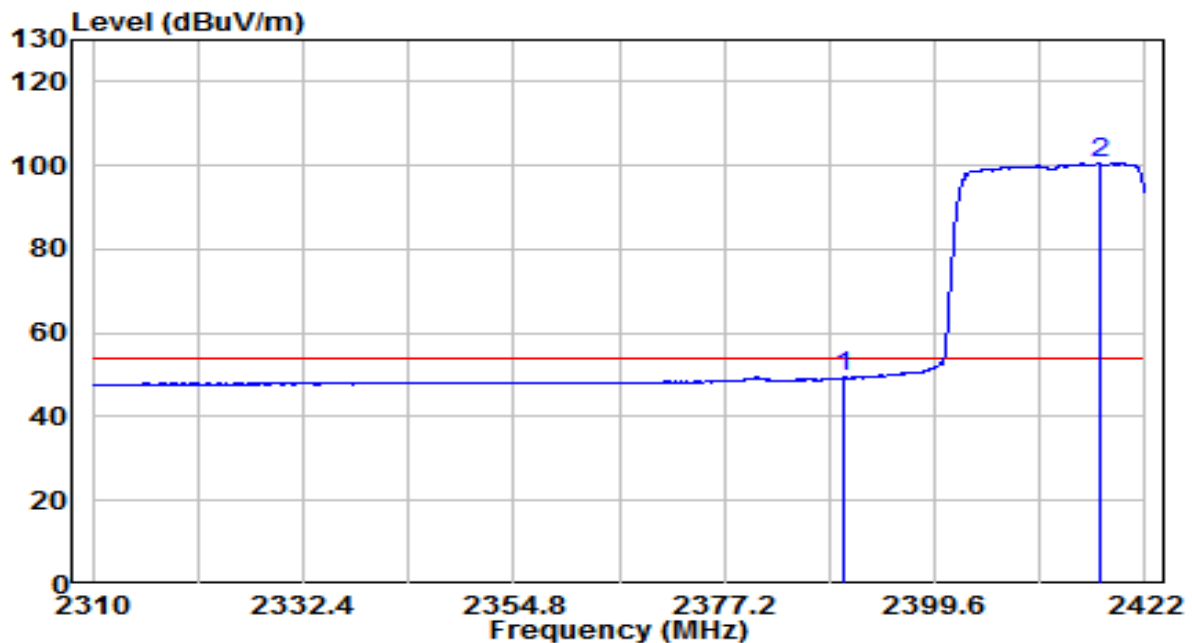


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	17.24	32.27	49.51	-4.49	54.00	Average
2	* 2417.072	68.13	32.40	100.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2437MHz (Beamforming Mode)	Test Voltage	120V/60Hz

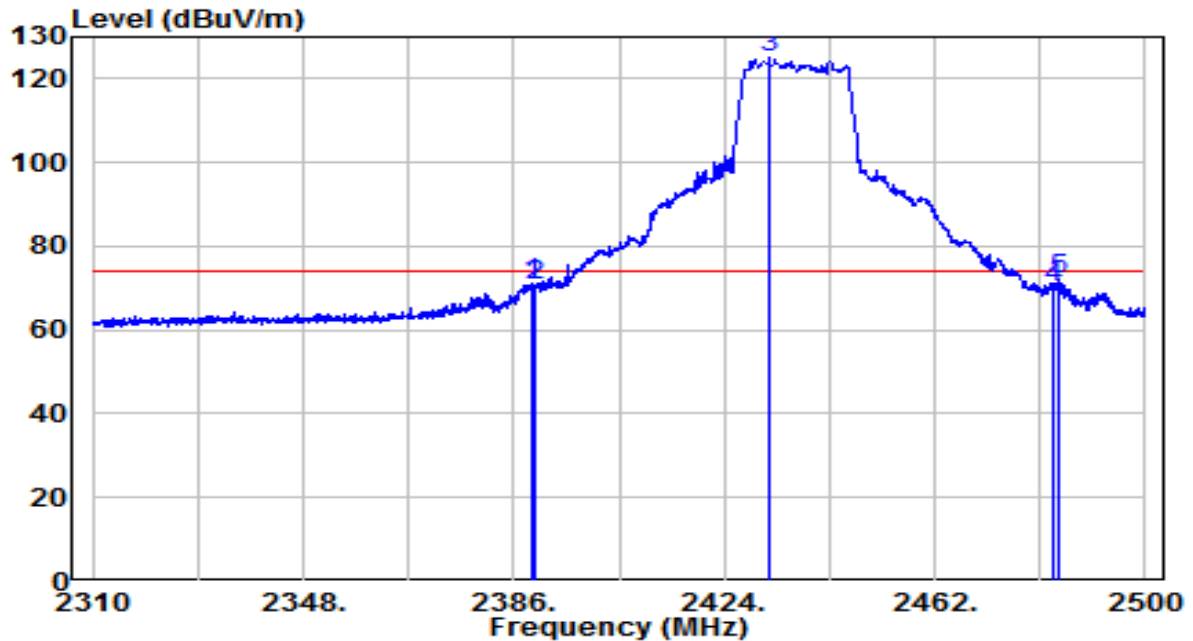


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.515	38.64	32.27	70.91	-3.09	74.00	Peak
2	2389.990	38.18	32.27	70.46	-3.54	74.00	Peak
3	* 2432.170	92.68	32.47	125.15	N/A	N/A	Peak
4	2483.500	37.64	32.70	70.34	-3.66	74.00	Peak
5	2484.610	39.18	32.71	71.89	-2.11	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2437MHz (Beamforming Mode)	Test Voltage	120V/60Hz

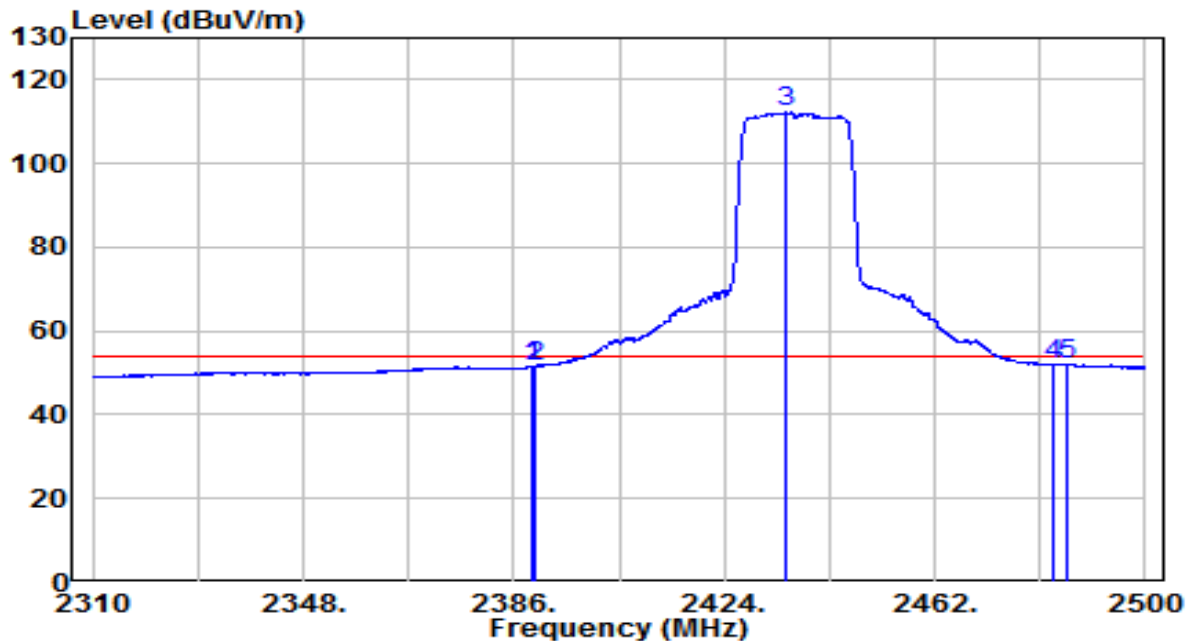


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.515	19.27	32.27	51.54	-2.46	54.00	Average
2	2390.000	19.22	32.27	51.49	-2.51	54.00	Average
3	* 2435.210	79.69	32.48	112.17	N/A	N/A	Average
4	2483.500	19.31	32.70	52.01	-1.99	54.00	Average
5	2486.130	19.46	32.72	52.18	-1.82	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2437MHz (Beamforming Mode)	Test Voltage	120V/60Hz

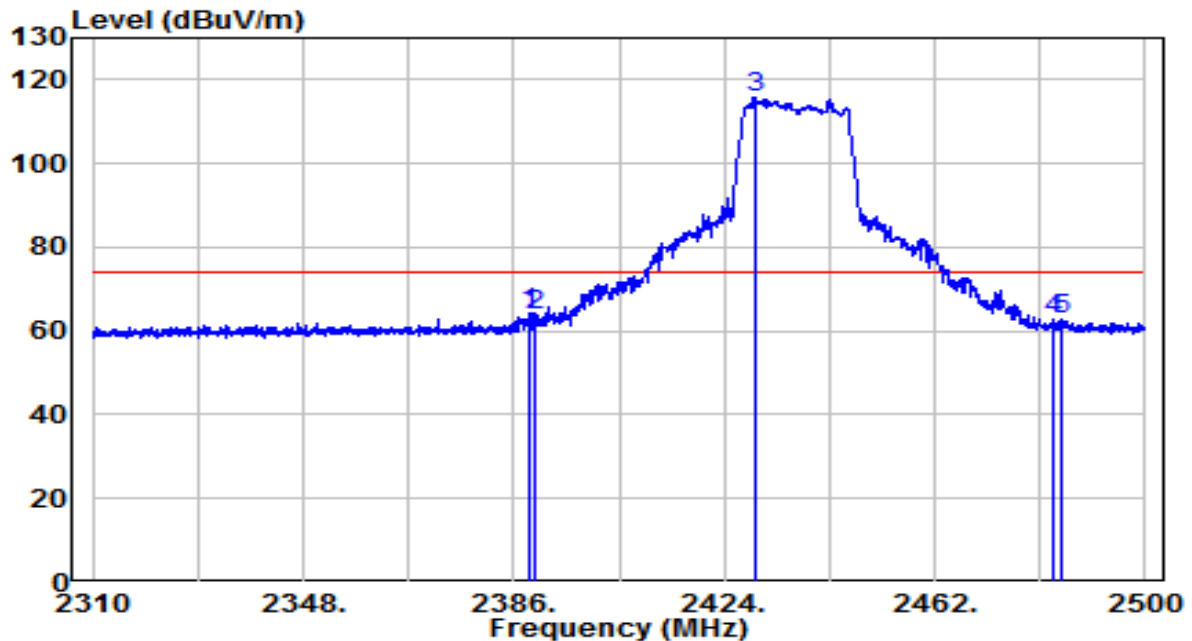


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.755	32.01	32.27	64.28	-9.72	74.00	Peak
2	2390.000	31.57	32.27	63.85	-10.15	74.00	Peak
3	* 2429.510	83.38	32.46	115.84	N/A	N/A	Peak
4	2483.500	29.91	32.70	62.62	-11.38	74.00	Peak
5	2484.800	30.13	32.71	62.84	-11.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2437MHz (Beamforming Mode)	Test Voltage	120V/60Hz

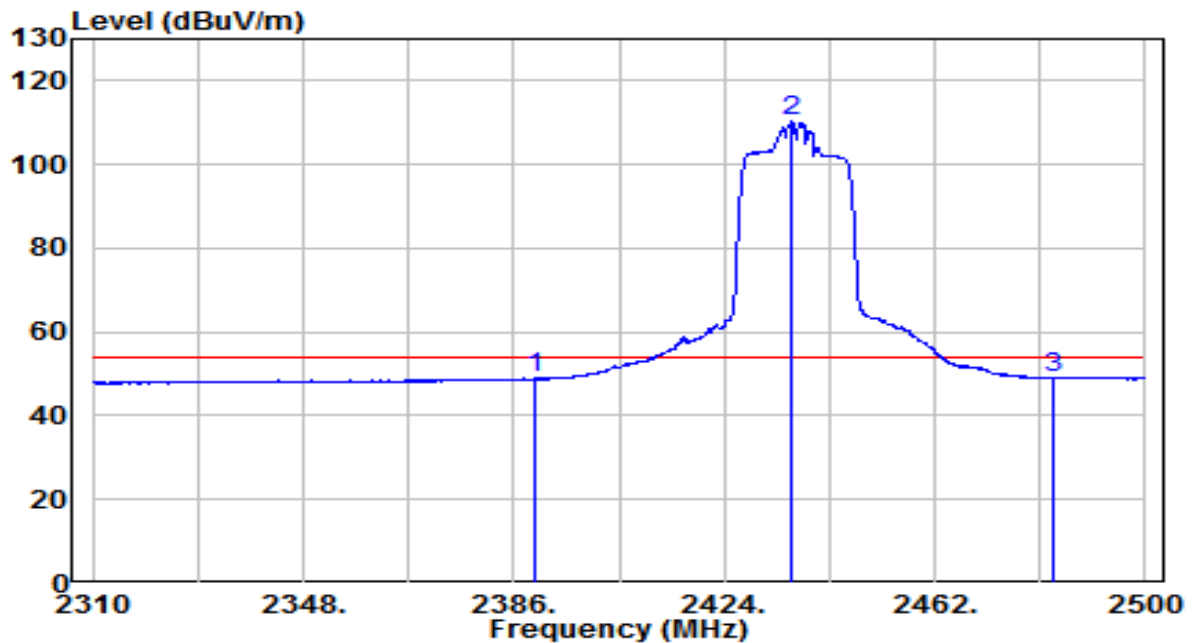


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	16.60	32.27	48.87	-5.13	54.00	Average
2	* 2436.255	77.95	32.49	110.43	N/A	N/A	Average
3	2483.500	16.39	32.70	49.09	-4.91	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (Beamforming Mode)	Test Voltage	120V/60Hz

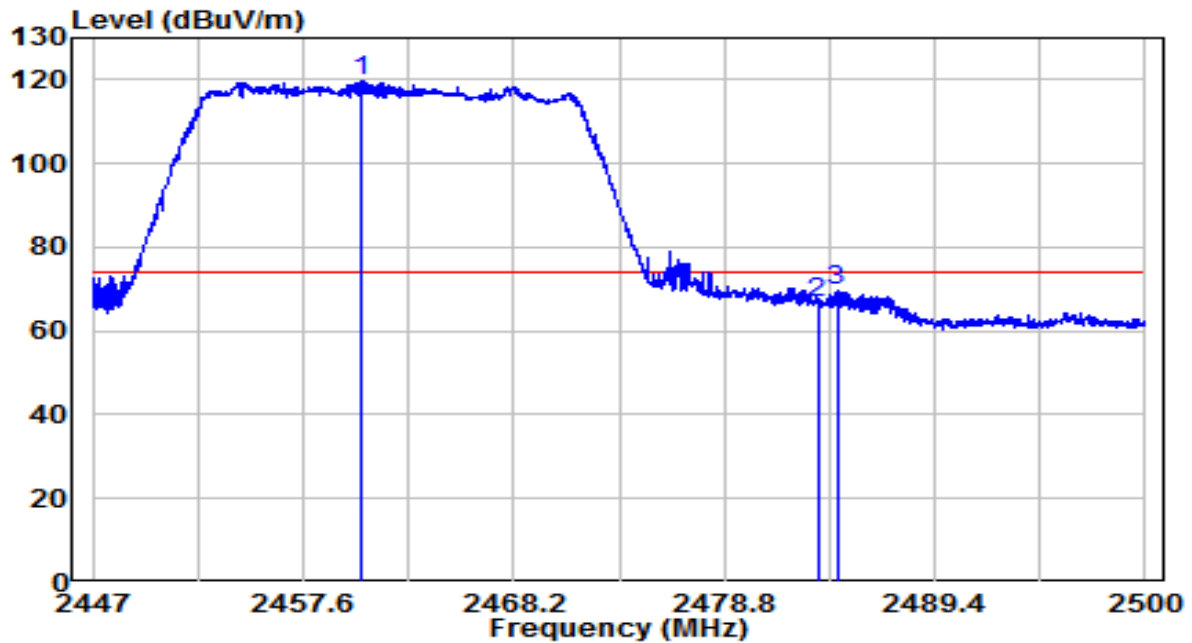


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.489	87.25	32.60	119.85	N/A	N/A	Peak
2		2483.500	33.91	32.70	66.62	-7.38	74.00	Peak
3		2484.471	36.98	32.71	69.69	-4.31	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (Beamforming Mode)	Test Voltage	120V/60Hz

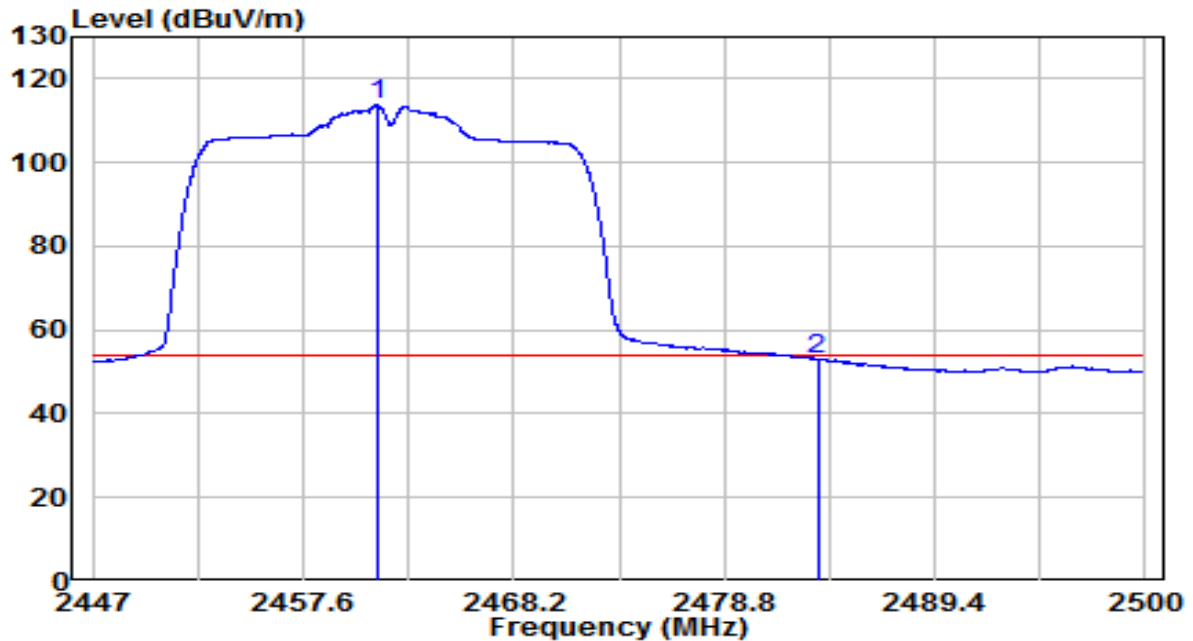


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.310	81.02	32.60	113.62	N/A	N/A	Average
2		2483.500	20.32	32.70	53.02	-0.98	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (Beamforming Mode)	Test Voltage	120V/60Hz

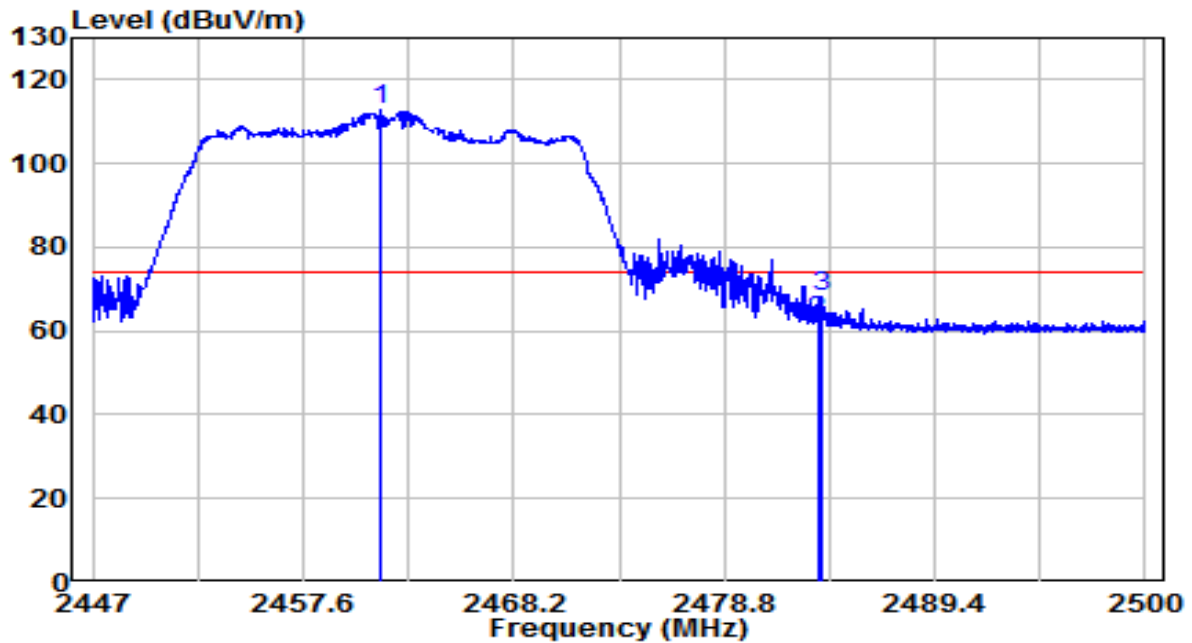


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.549	80.05	32.60	112.66	N/A	N/A	Peak
2		2483.500	29.50	32.70	62.21	-11.79	74.00	Peak
3		2483.702	35.39	32.71	68.10	-5.90	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz (Beamforming Mode)	Test Voltage	120V/60Hz

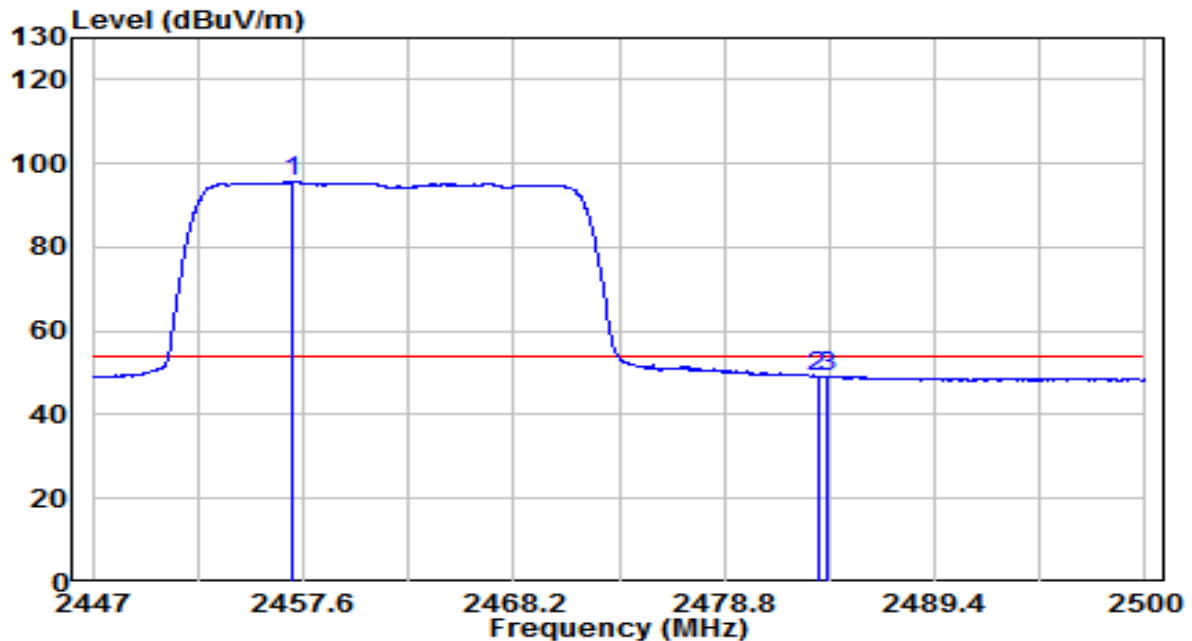


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2457.070	63.09	32.58	95.67	N/A	N/A	Average
2		2483.500	16.36	32.70	49.06	-4.94	54.00	Average
3		2483.941	16.41	32.71	49.12	-4.88	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (Beamforming Mode)	Test Voltage	120V/60Hz

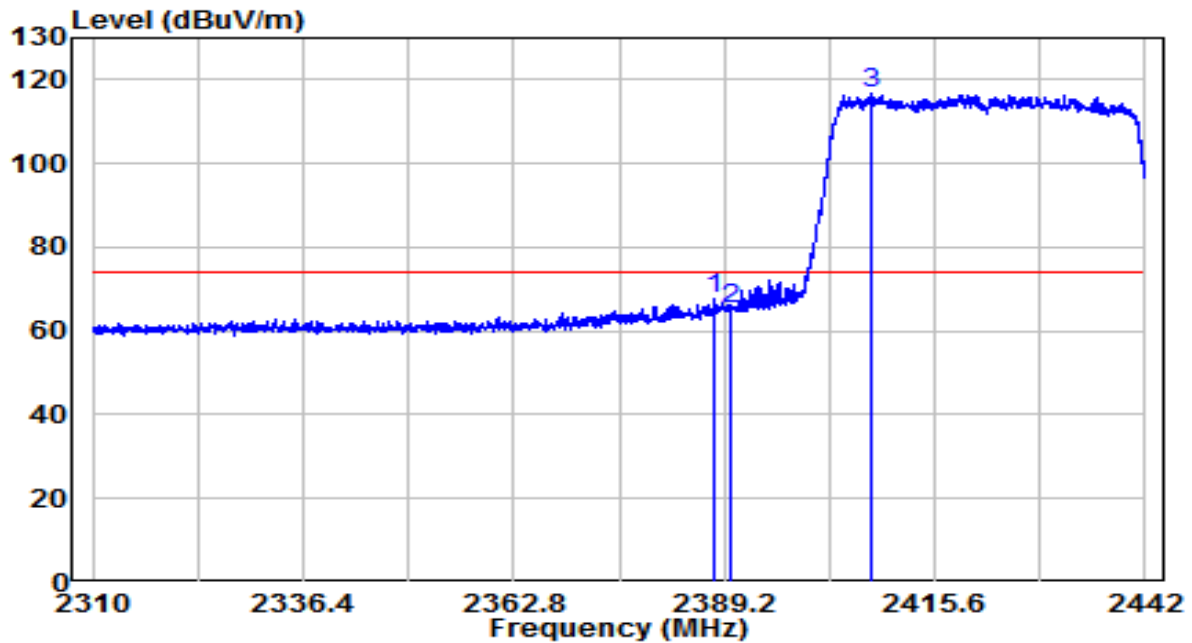


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.078	35.52	32.27	67.78	-6.22	74.00	Peak
2	2390.000	33.09	32.27	65.36	-8.64	74.00	Peak
3	* 2407.680	84.28	32.35	116.63	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (Beamforming Mode)	Test Voltage	120V/60Hz

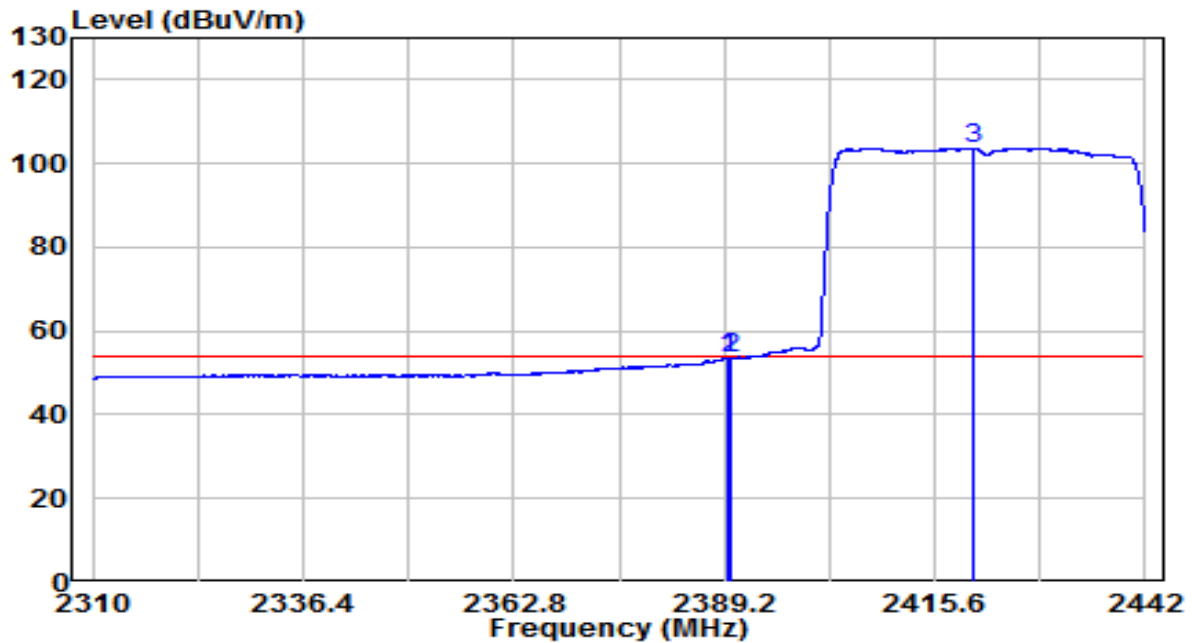


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.596	21.34	32.27	53.61	-0.39	54.00	Average
2	2390.000	21.31	32.27	53.58	-0.42	54.00	Average
3	* 2420.550	71.28	32.41	103.69	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (Beamforming Mode)	Test Voltage	120V/60Hz

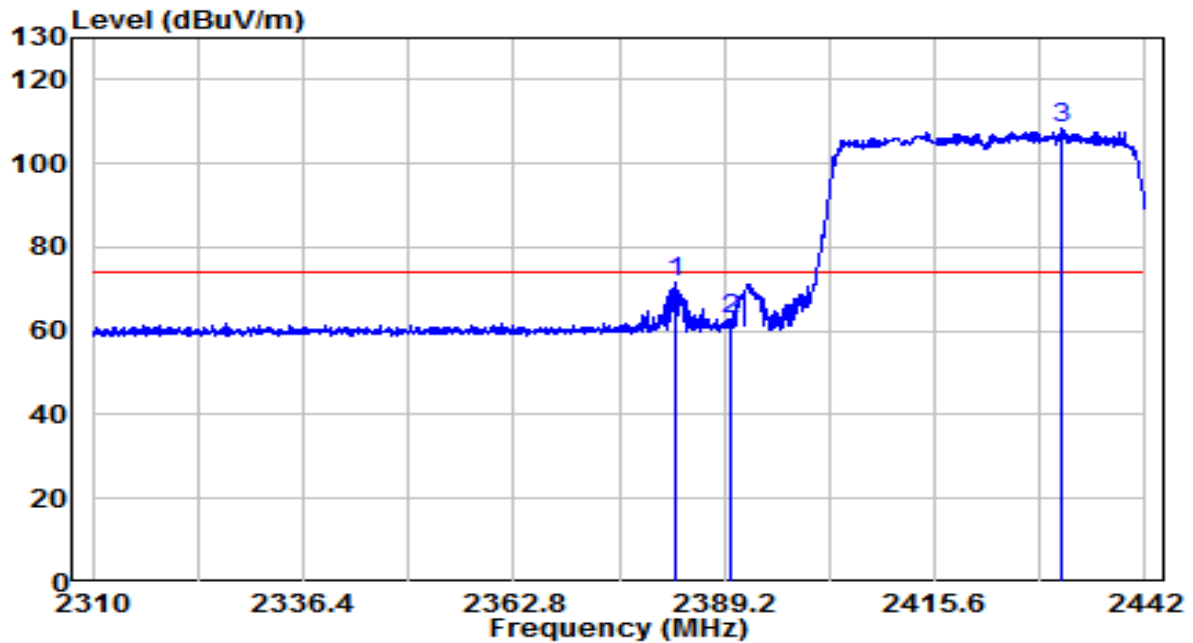


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2383.128	39.34	32.24	71.58	-2.42	74.00	Peak
2	2390.000	30.43	32.27	62.71	-11.29	74.00	Peak
3	* 2431.638	75.76	32.47	108.22	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz (Beamforming Mode)	Test Voltage	120V/60Hz

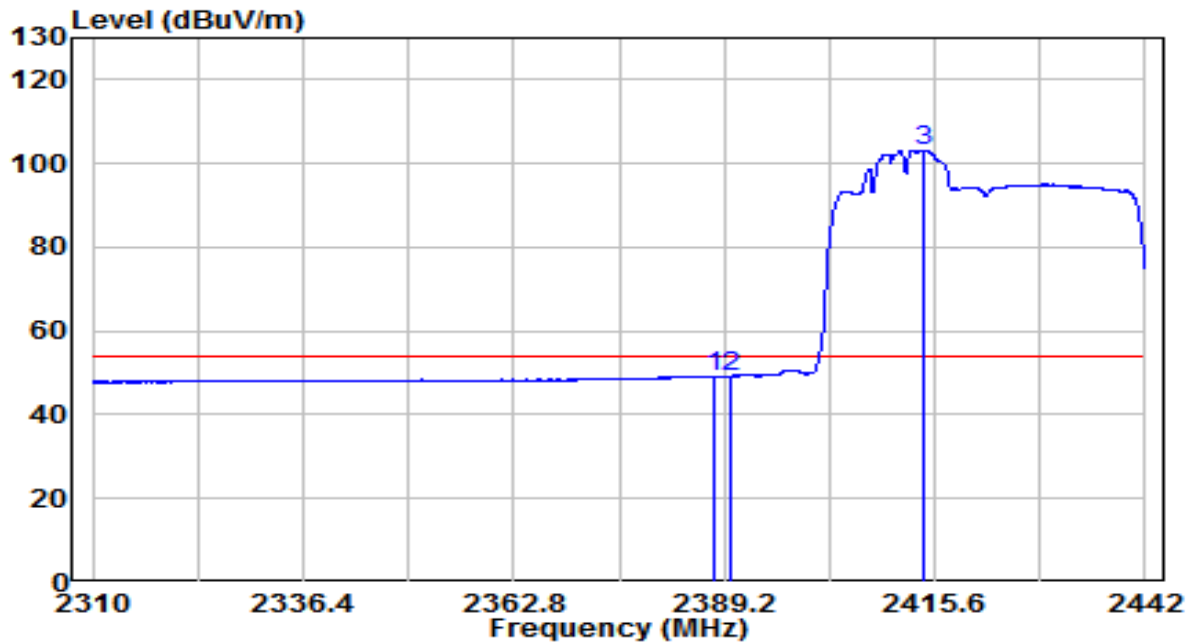


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.012	16.98	32.27	49.24	-4.76	54.00	Average
2	2390.000	16.89	32.27	49.16	-4.84	54.00	Average
3	* 2414.214	70.77	32.38	103.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz (Beamforming Mode)	Test Voltage	120V/60Hz

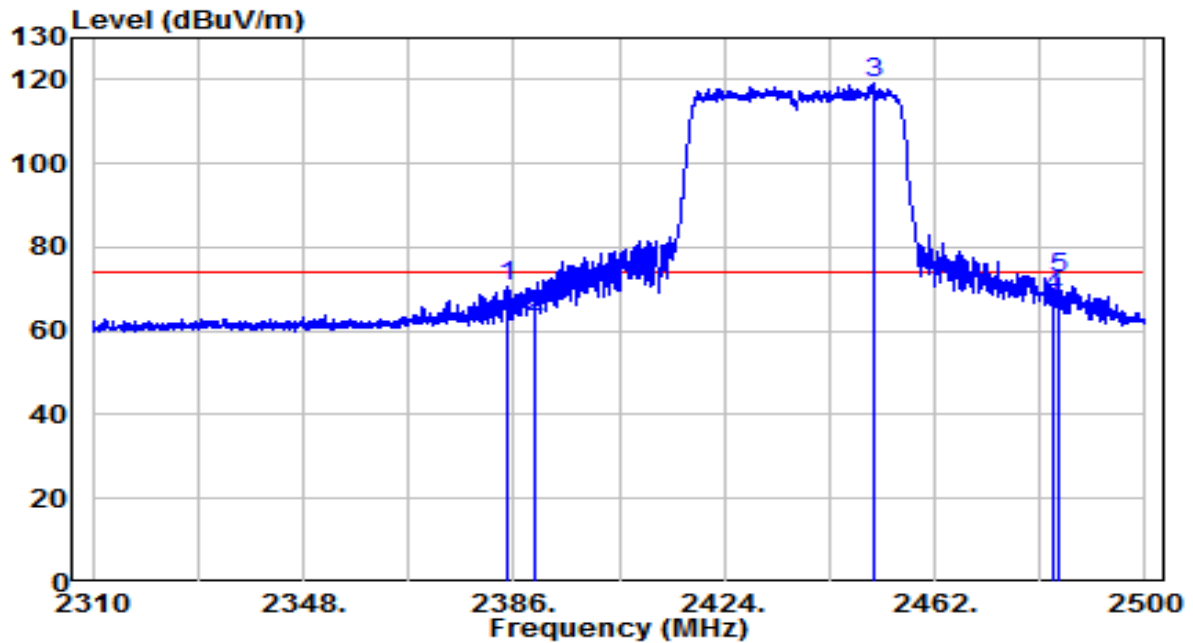


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2384.670	38.23	32.25	70.48	-3.52	74.00	Peak
2	2390.000	31.23	32.27	63.50	-10.50	74.00	Peak
3	* 2450.885	86.59	32.55	119.14	N/A	N/A	Peak
4	2483.500	35.65	32.70	68.35	-5.65	74.00	Peak
5	2484.420	39.67	32.71	72.37	-1.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz (Beamforming Mode)	Test Voltage	120V/60Hz

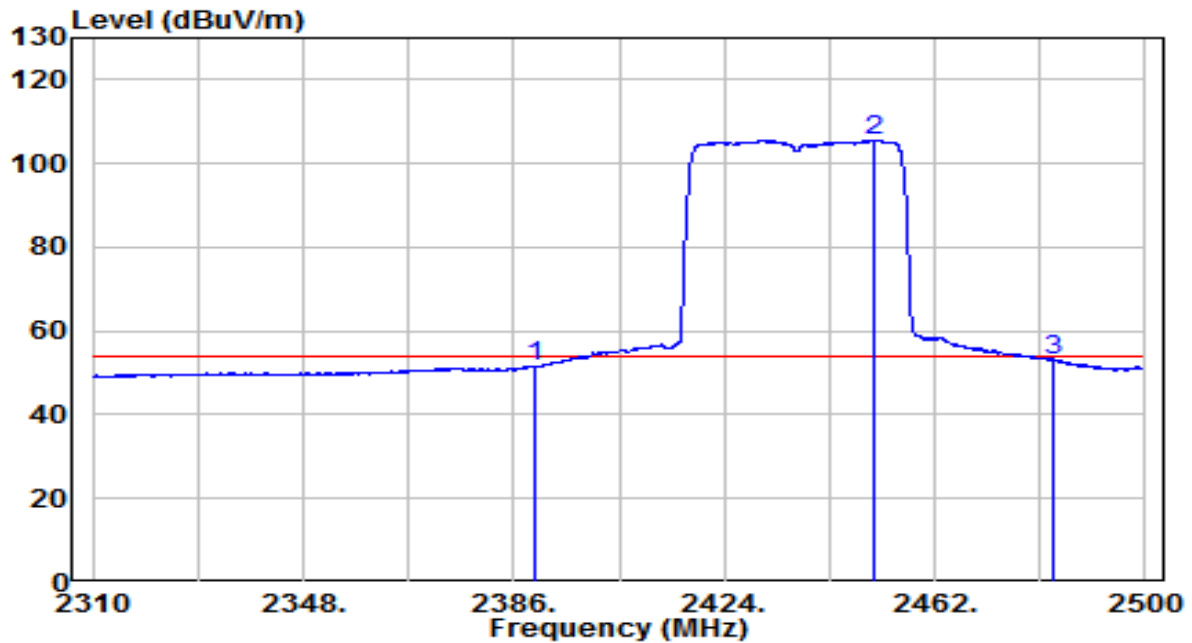


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.34	32.27	51.62	-2.38	54.00	Average
2	* 2451.170	72.99	32.56	105.54	N/A	N/A	Average
3	2483.500	20.47	32.70	53.17	-0.83	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz (Beamforming Mode)	Test Voltage	120V/60Hz

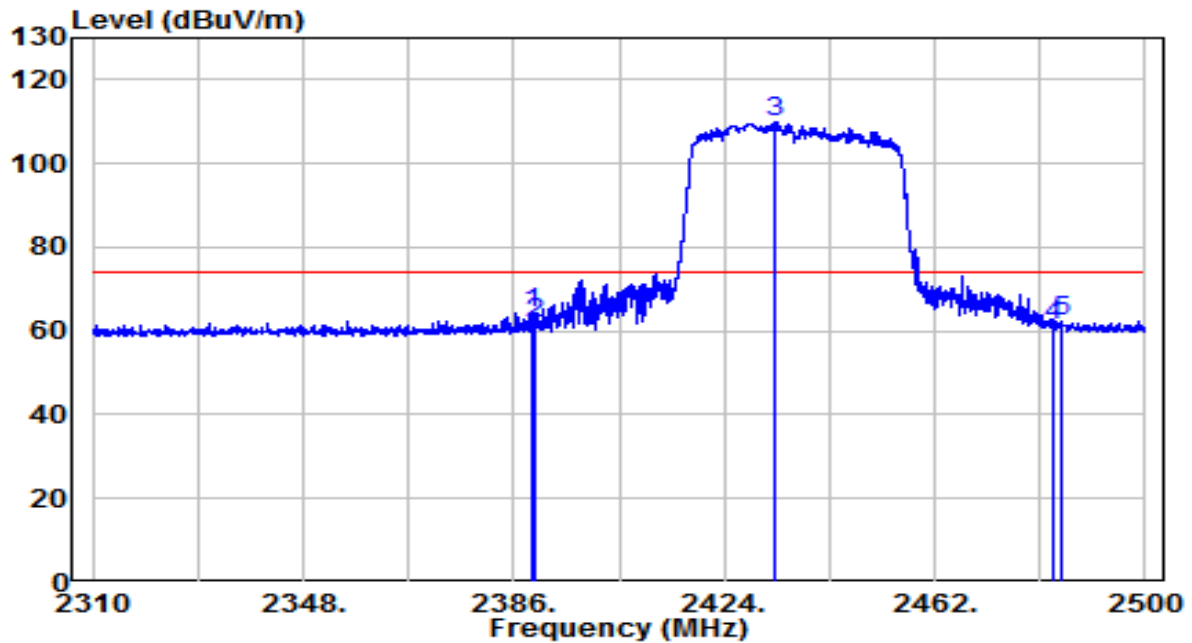


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.515	32.12	32.27	64.39	-9.61	74.00	Peak
2	2390.000	29.56	32.27	61.83	-12.17	74.00	Peak
3	* 2432.930	77.56	32.47	110.03	N/A	N/A	Peak
4	2483.500	28.71	32.70	61.41	-12.59	74.00	Peak
5	2484.990	29.51	32.71	62.22	-11.78	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2437MHz (Beamforming Mode)	Test Voltage	120V/60Hz

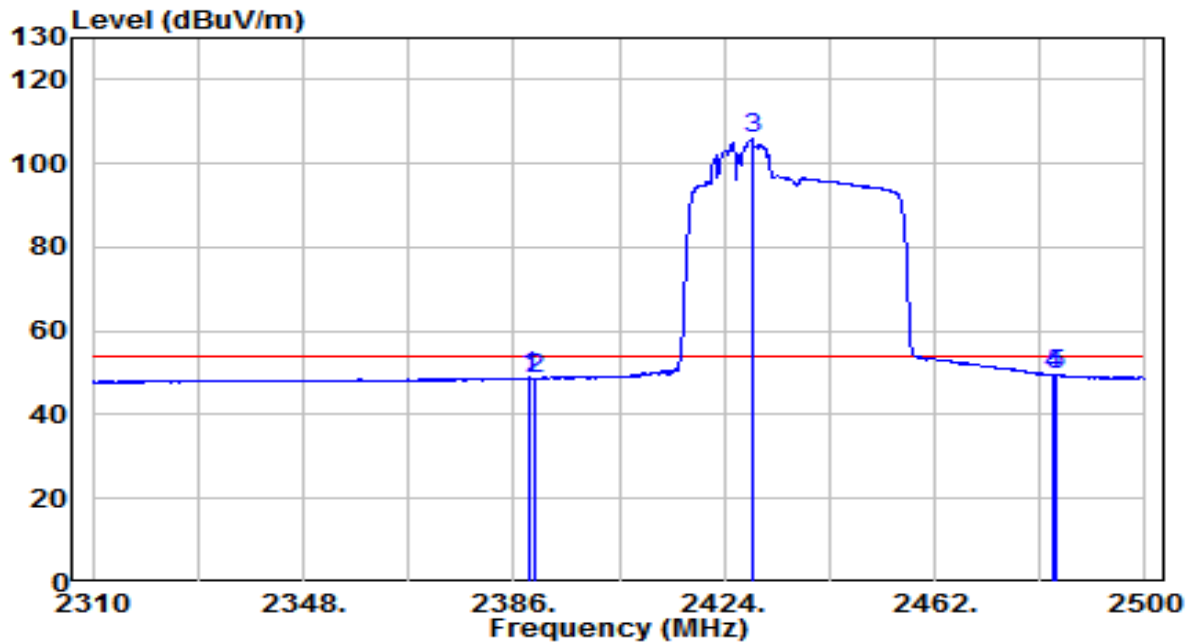


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2388.850	16.60	32.27	48.87	-5.13	54.00	Average
2	2390.000	16.38	32.27	48.65	-5.35	54.00	Average
3 *	2429.130	73.28	32.45	105.73	N/A	N/A	Average
4	2483.500	16.79	32.70	49.49	-4.51	54.00	Average
5	2483.755	16.83	32.71	49.54	-4.46	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (Beamforming Mode)	Test Voltage	120V/60Hz

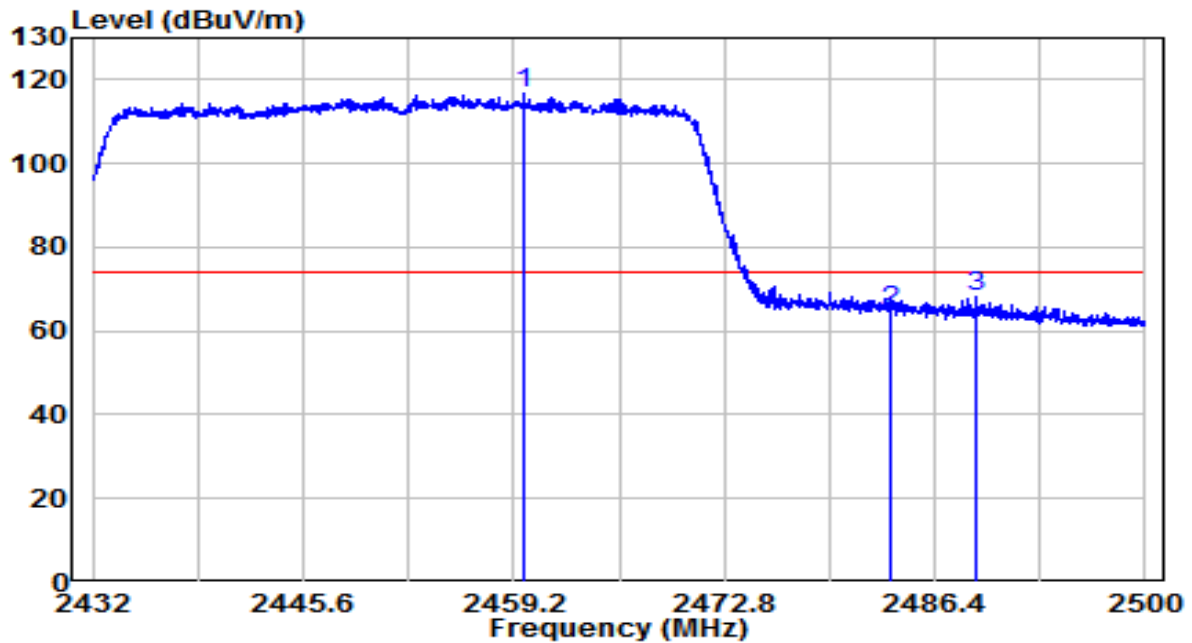


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2459.812	84.00	32.60	116.60	N/A	N/A	Peak
2	2483.500	32.22	32.70	64.92	-9.08	74.00	Peak
3	2489.086	35.33	32.73	68.06	-5.94	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (Beamforming Mode)	Test Voltage	120V/60Hz

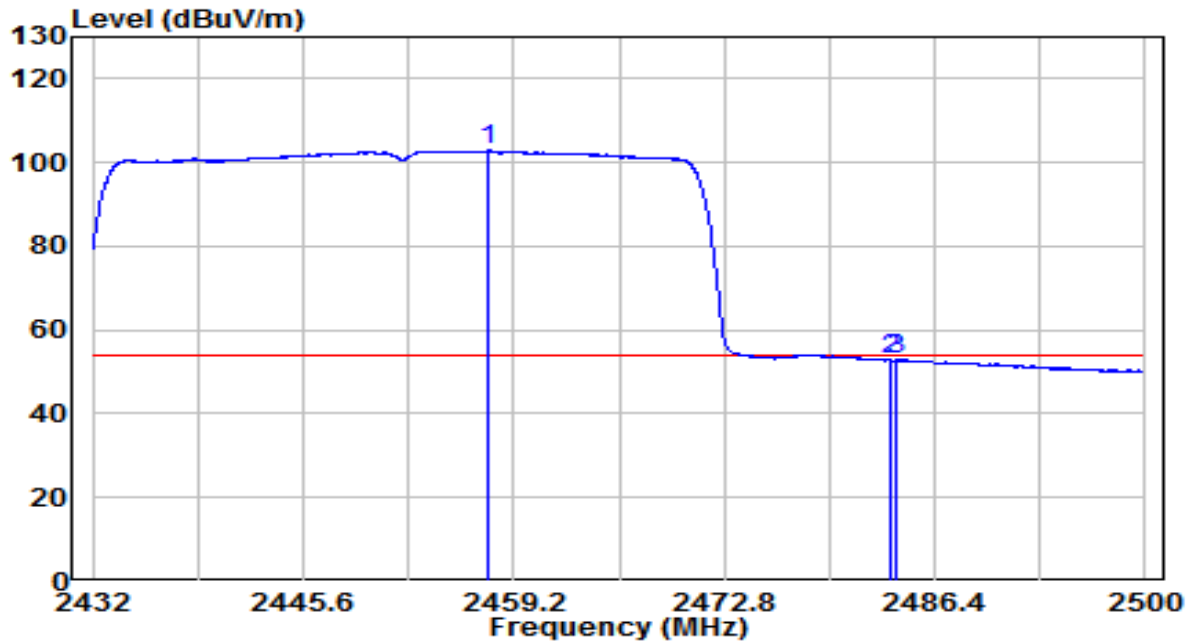


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2457.602	70.25	32.59	102.83	N/A	N/A	Average
2		2483.500	20.13	32.70	52.84	-1.16	54.00	Average
3		2483.952	20.24	32.71	52.94	-1.06	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (Beamforming Mode)	Test Voltage	120V/60Hz

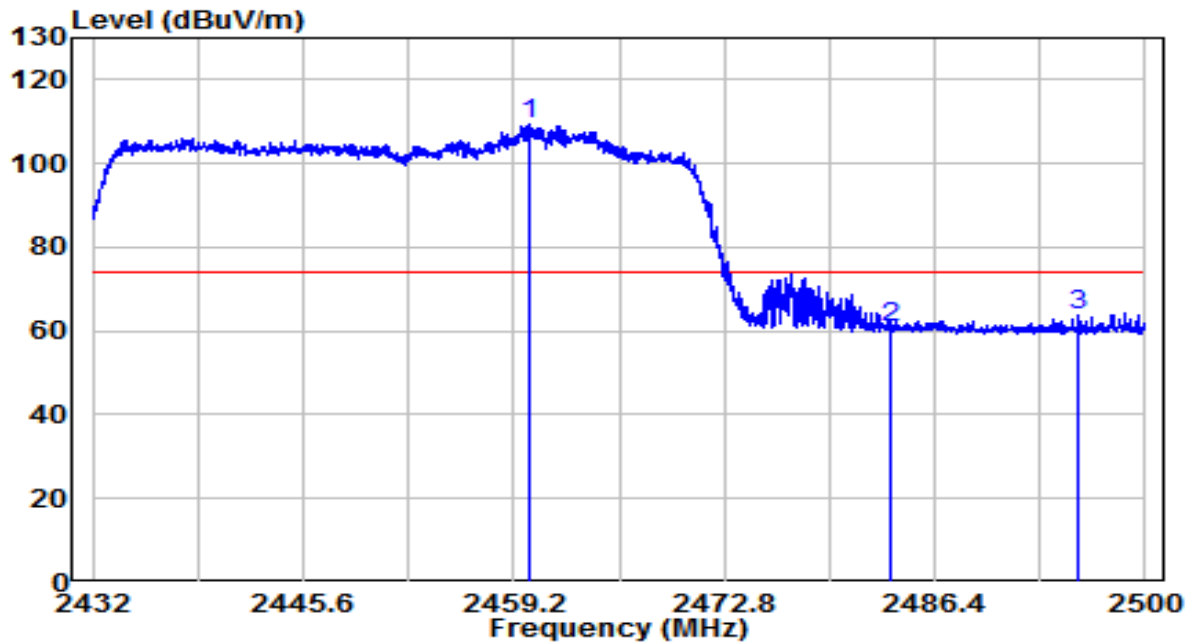


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.254	76.92	32.60	109.52	N/A	N/A	Peak
2		2483.500	28.11	32.70	60.81	-13.19	74.00	Peak
3		2495.716	31.18	32.76	63.94	-10.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-22
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	24.3°C/35.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz (Beamforming Mode)	Test Voltage	120V/60Hz

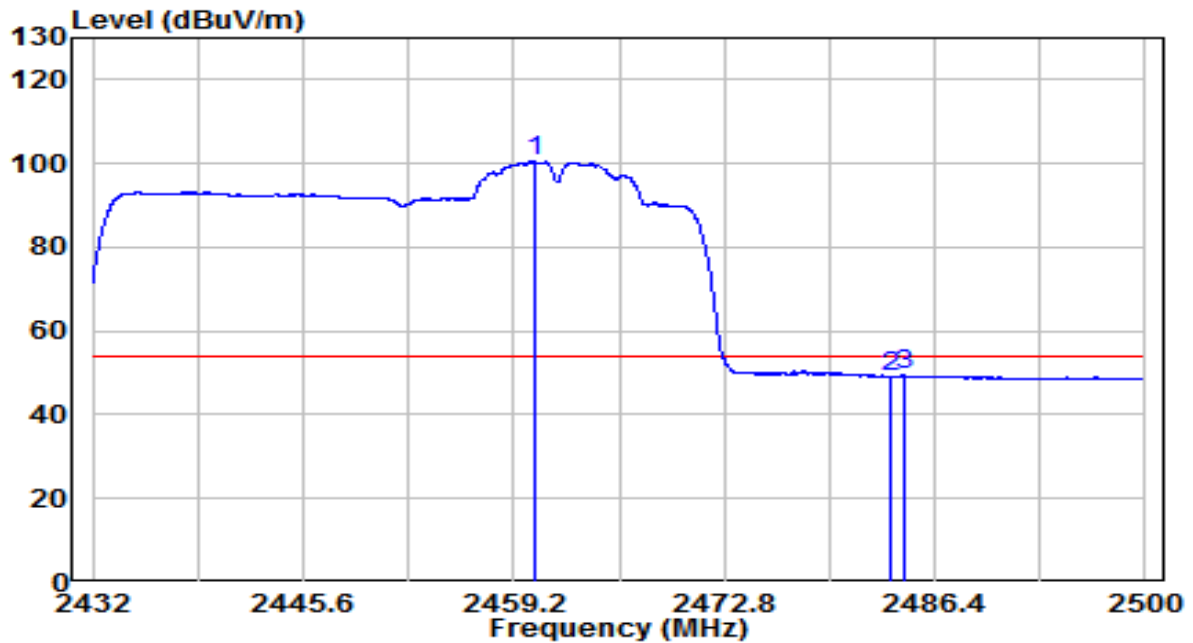


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.526	67.80	32.60	100.40	N/A	N/A	Average
2		2483.500	16.42	32.70	49.12	-4.88	54.00	Average
3		2484.428	16.64	32.71	49.35	-4.65	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

Spot Check Verified Data

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

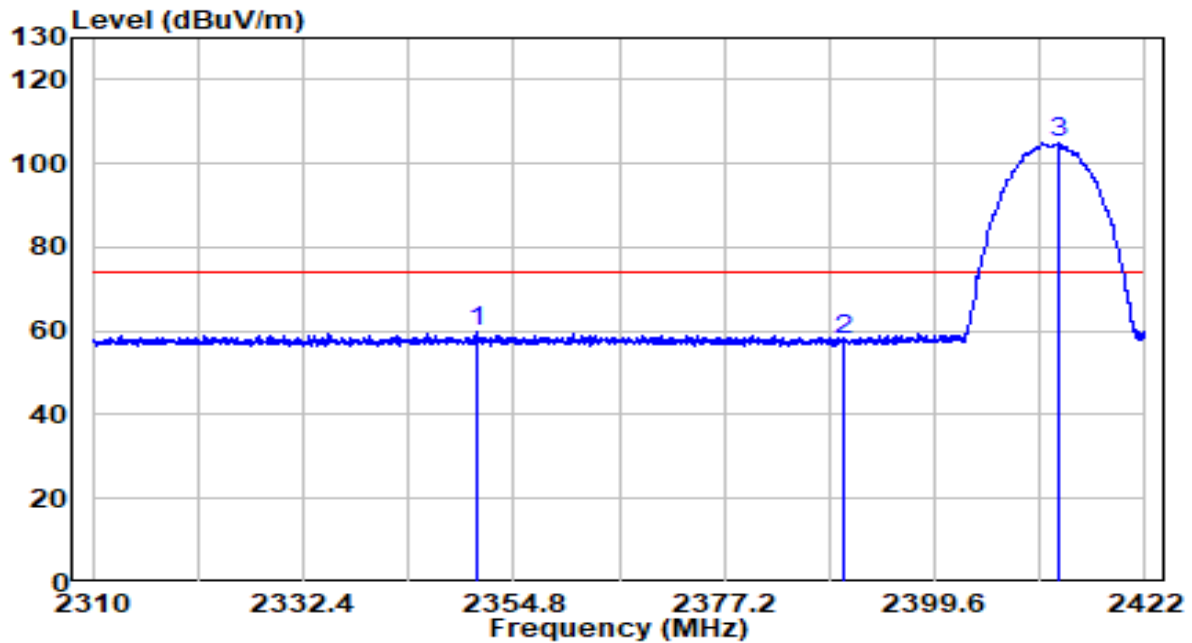


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2350.768	27.59	32.09	59.69	-14.31	74.00	Peak
2	2390.000	25.39	32.27	57.67	-16.33	74.00	Peak
3	* 2412.816	72.45	32.38	104.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

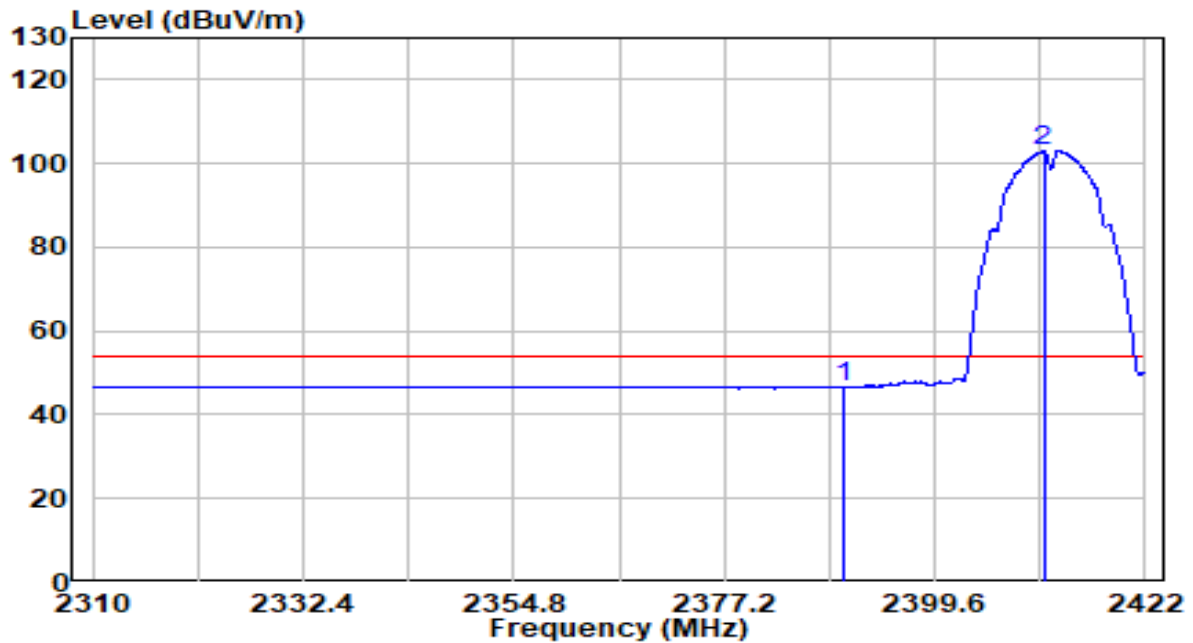


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	14.28	32.27	46.55	-7.45	54.00	Average
2	* 2411.192	70.76	32.37	103.13	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

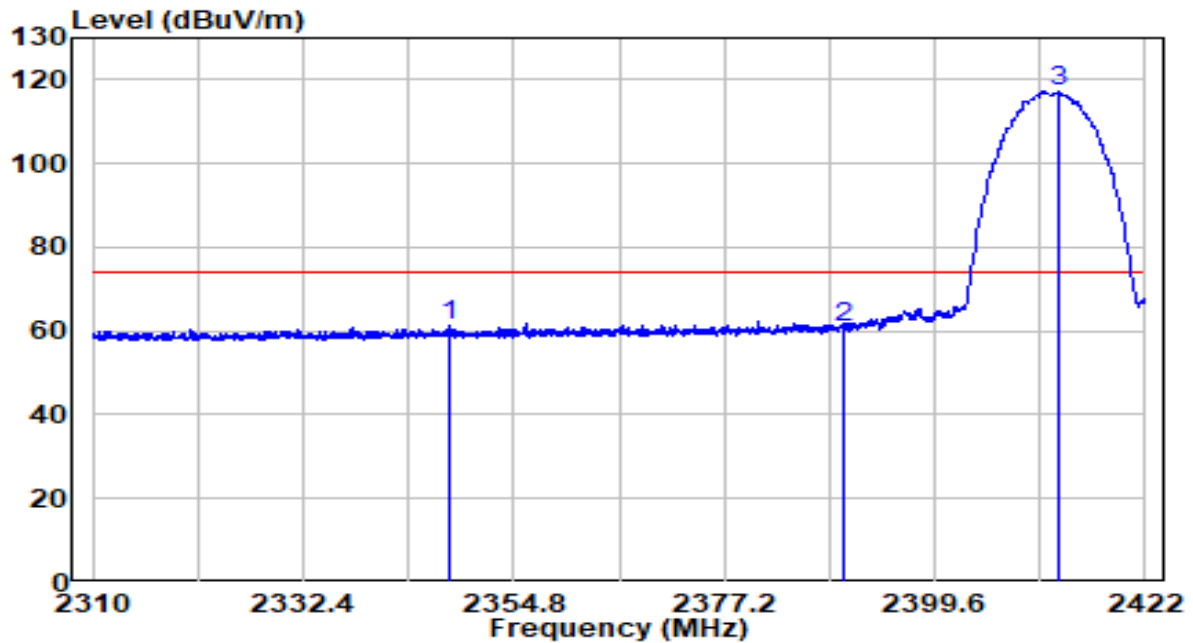


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2348.080	29.00	32.08	61.08	-12.92	74.00	Peak
2	2390.000	28.43	32.27	60.70	-13.30	74.00	Peak
3	*	84.82	32.38	117.20	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11b at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

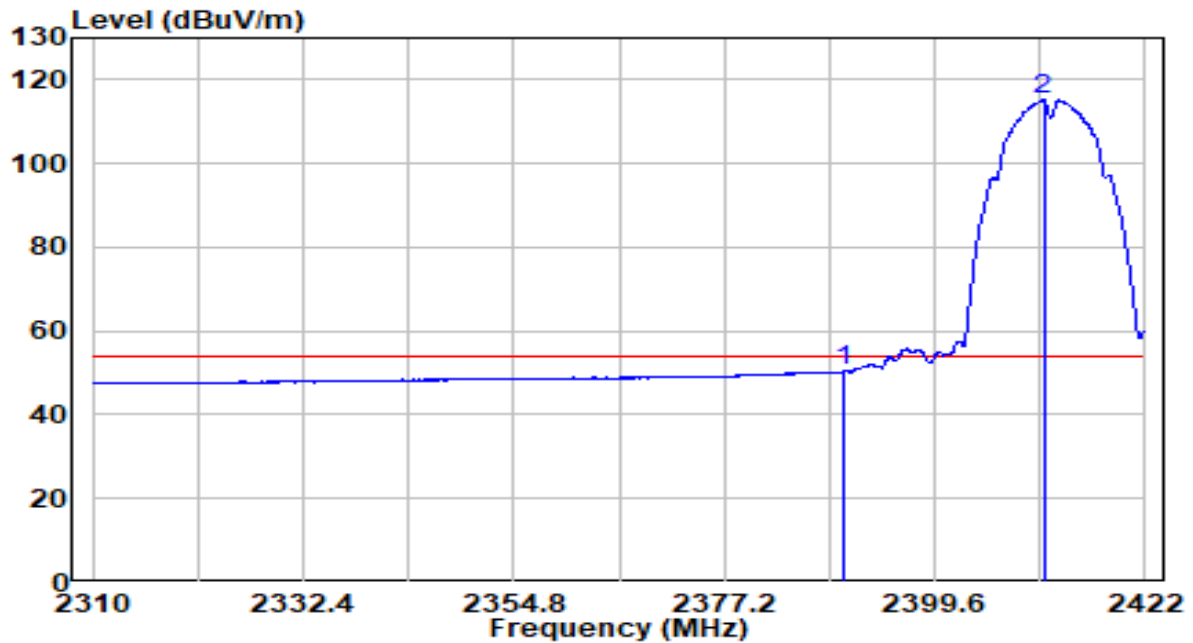


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.11	32.27	50.39	-3.61	54.00	Average
2	* 2411.192	82.80	32.37	115.17	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

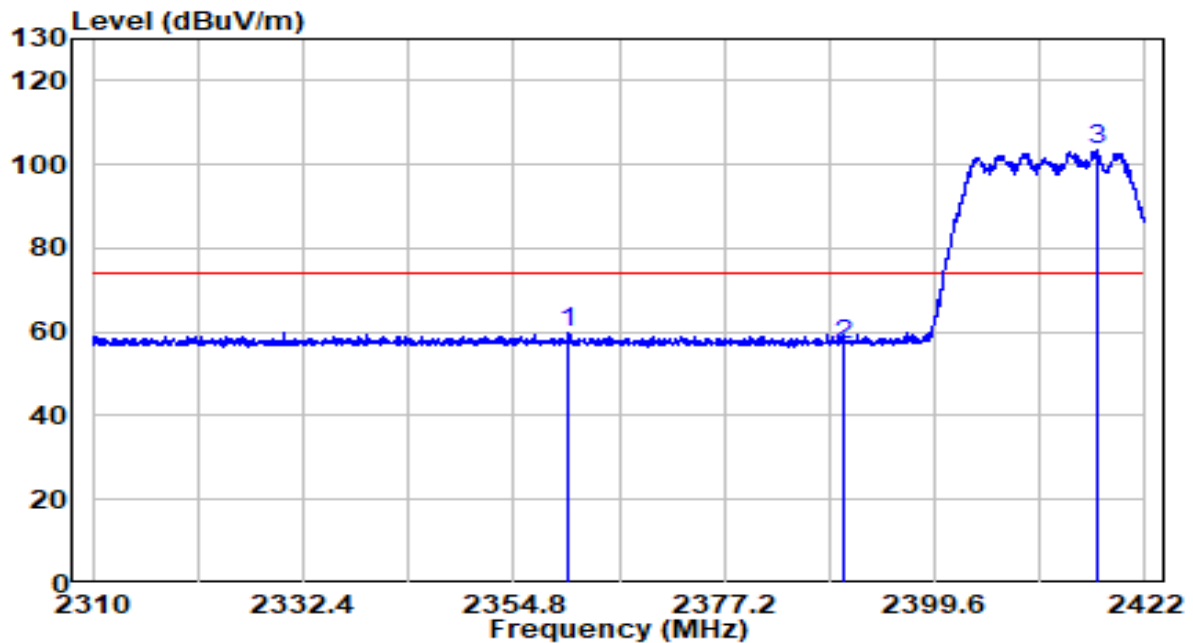


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2360.568	27.58	32.14	59.72	-14.28	74.00	Peak
2	2390.000	24.87	32.27	57.15	-16.85	74.00	Peak
3	* 2416.792	70.99	32.40	103.39	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

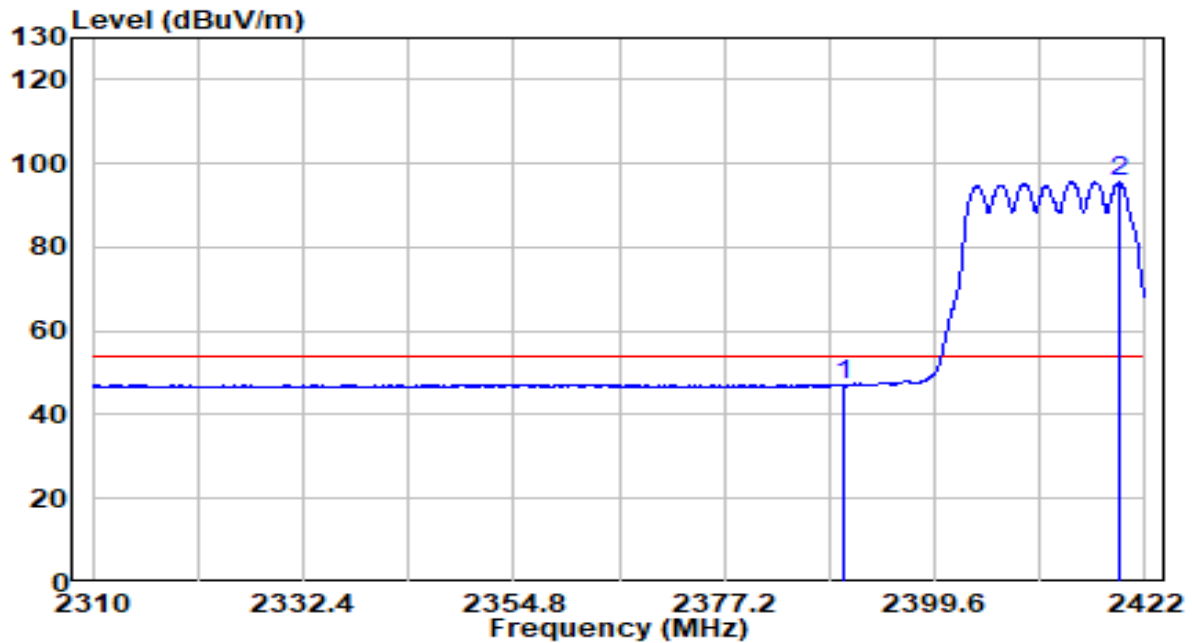


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	14.70	32.27	46.97	-7.03	54.00	Average
2	* 2419.200	63.09	32.41	95.49	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

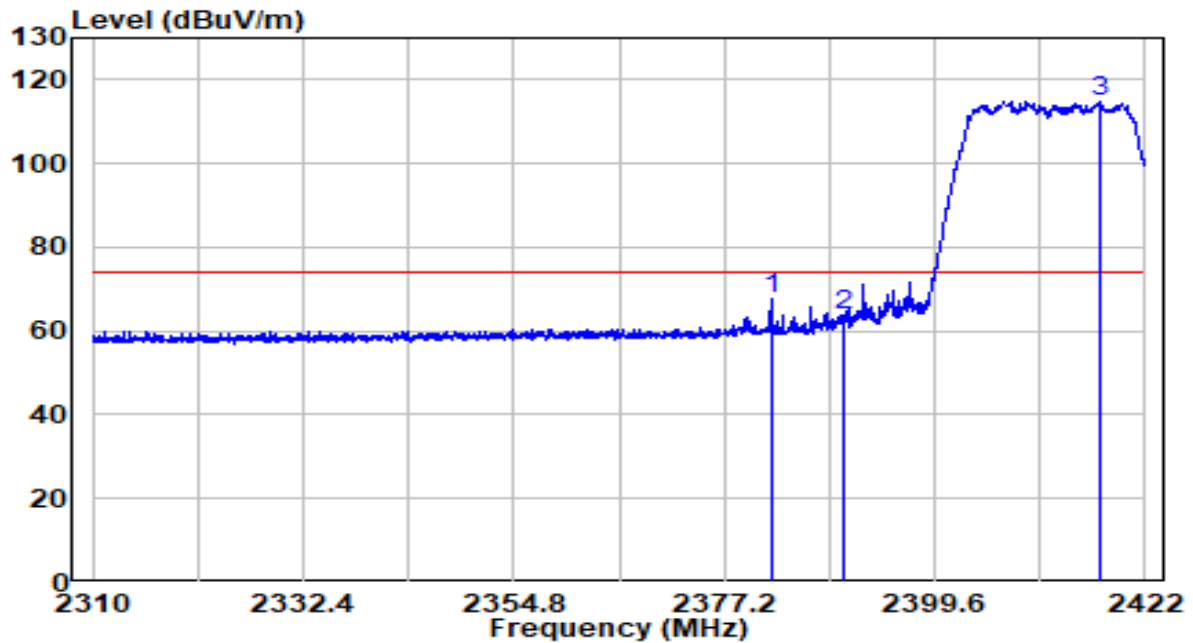


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2382.184	35.58	32.24	67.82	-6.18	74.00	Peak
2	2390.000	31.26	32.27	63.54	-10.46	74.00	Peak
3	*	82.40	32.40	114.80	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

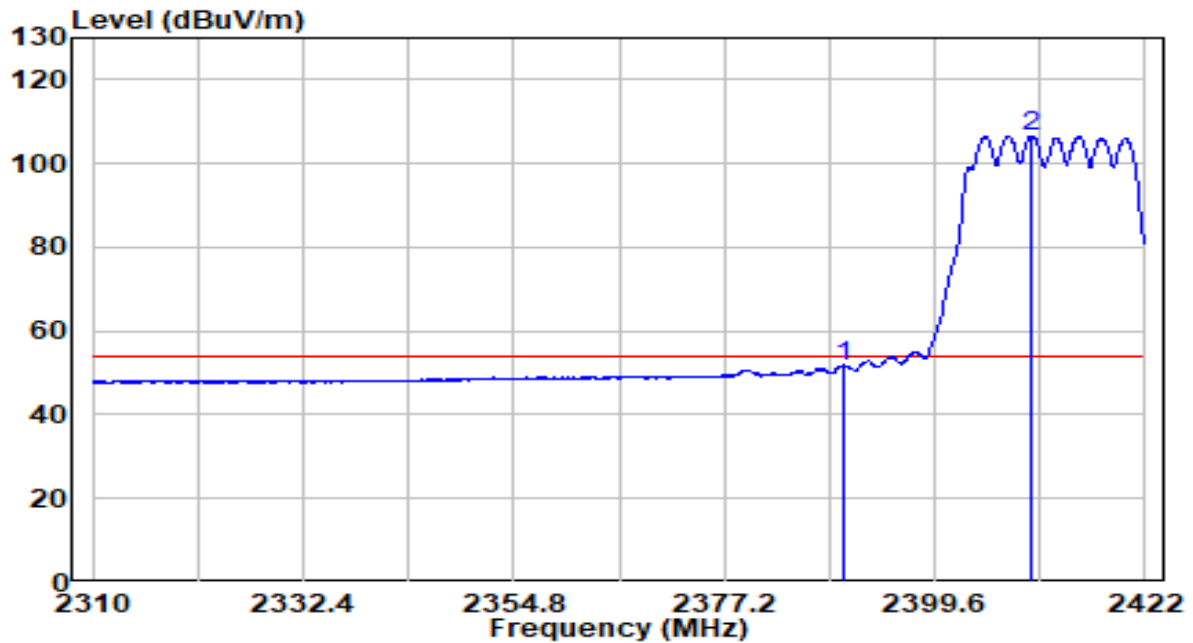


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.44	32.27	51.71	-2.29	54.00	Average
2	* 2409.904	74.31	32.36	106.68	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz – CDD Mode	Test Voltage	120V/60Hz

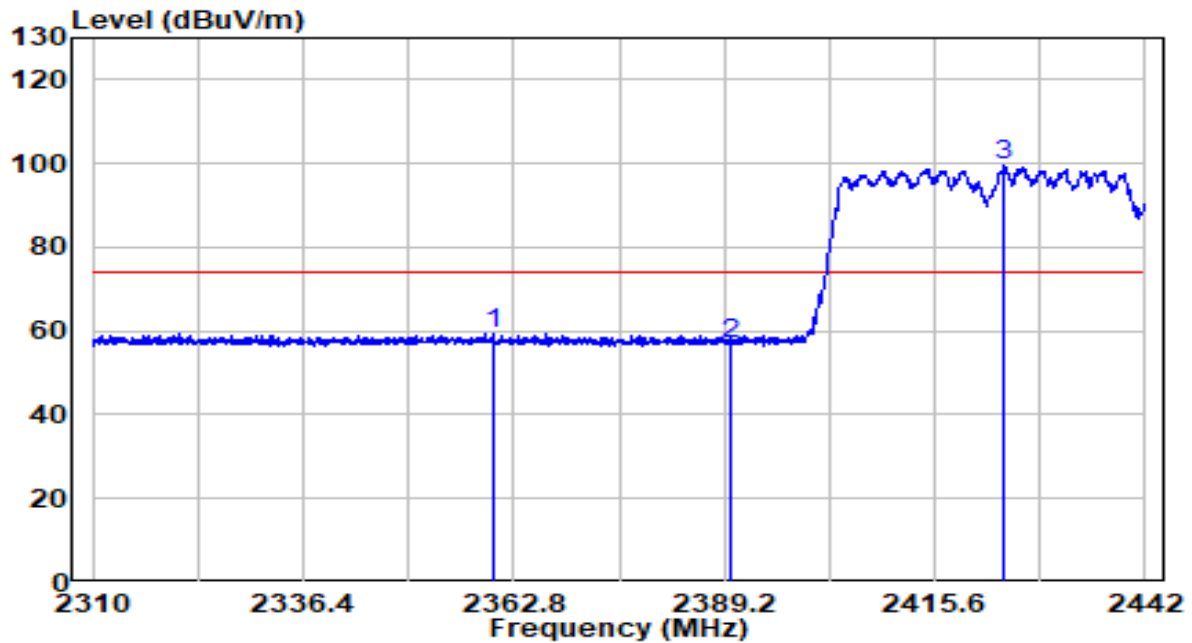


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2360.226	27.31	32.14	59.45	-14.55	74.00	Peak
2	2390.000	24.69	32.27	56.96	-17.04	74.00	Peak
3	* 2424.378	67.15	32.43	99.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz – CDD Mode	Test Voltage	120V/60Hz

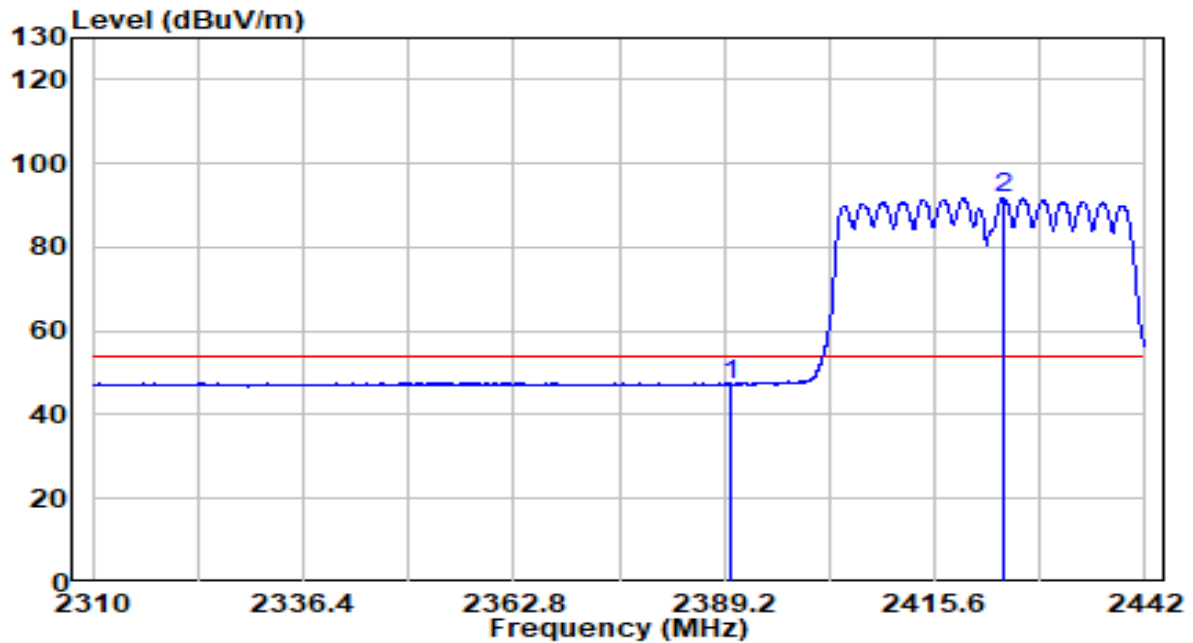


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	14.92	32.27	47.20	-6.80	54.00	Average
2	* 2424.246	59.27	32.43	91.70	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz – CDD Mode	Test Voltage	120V/60Hz

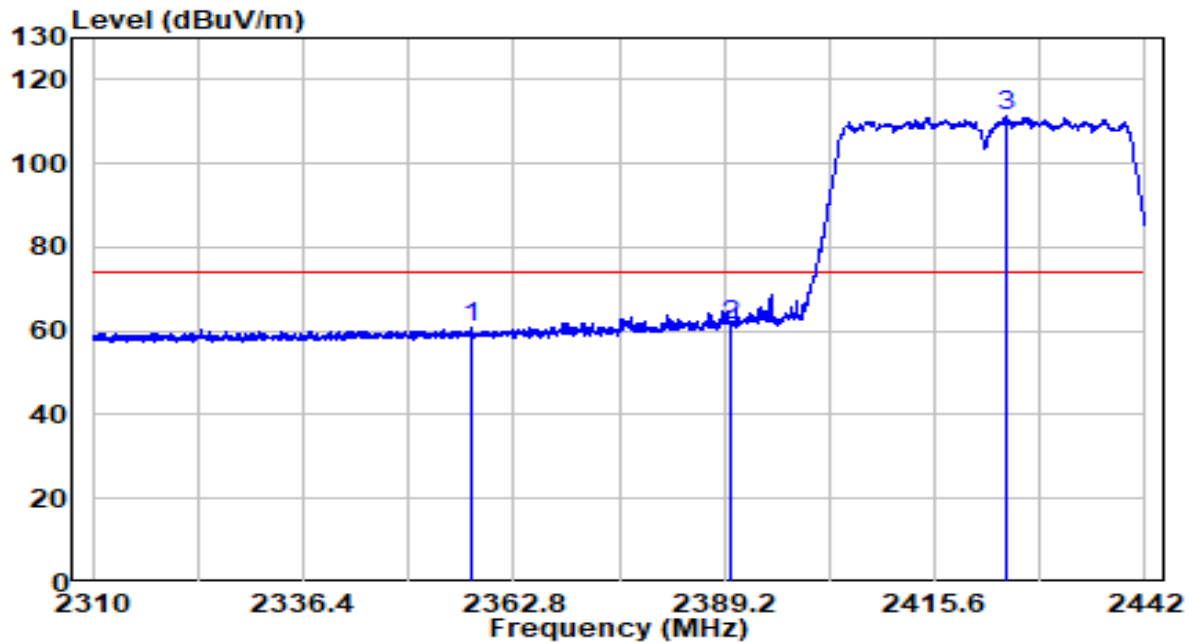


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2357.586	28.70	32.13	60.83	-13.17	74.00	Peak
2	2390.000	29.10	32.27	61.38	-12.62	74.00	Peak
3	* 2424.510	78.73	32.43	111.17	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz – CDD Mode	Test Voltage	120V/60Hz

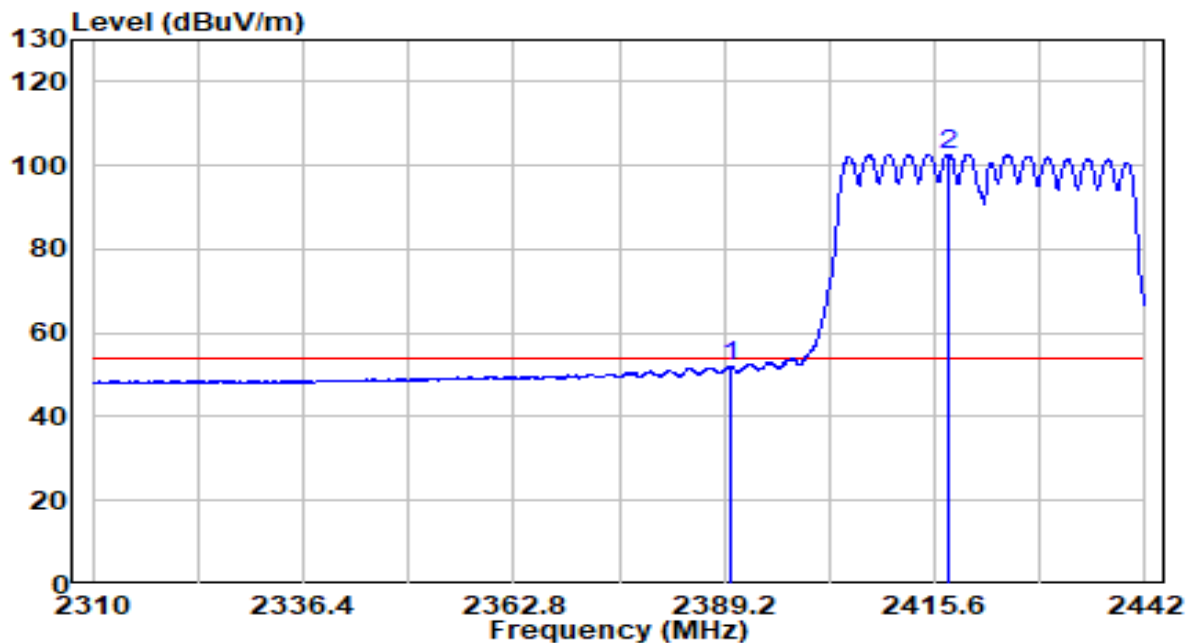


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	19.63	32.27	51.91	-2.09	54.00	Average
2	* 2417.316	70.37	32.40	102.77	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

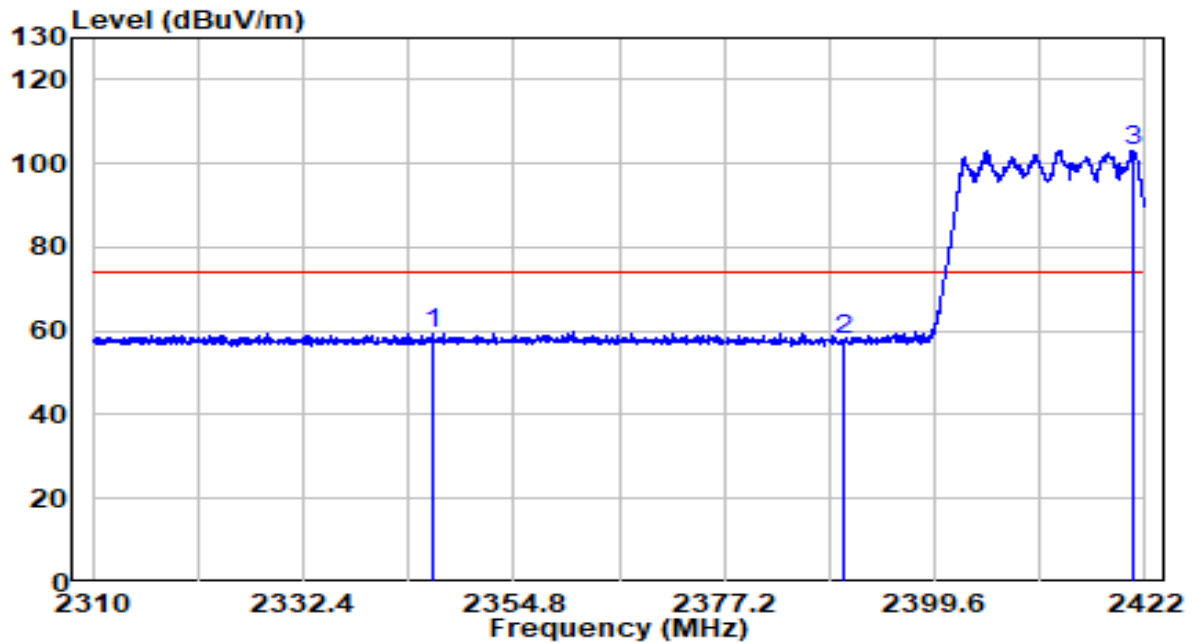


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2346.064	27.45	32.07	59.52	-14.48	74.00	Peak
2	2390.000	25.52	32.27	57.79	-16.21	74.00	Peak
3	*	70.81	32.41	103.23	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

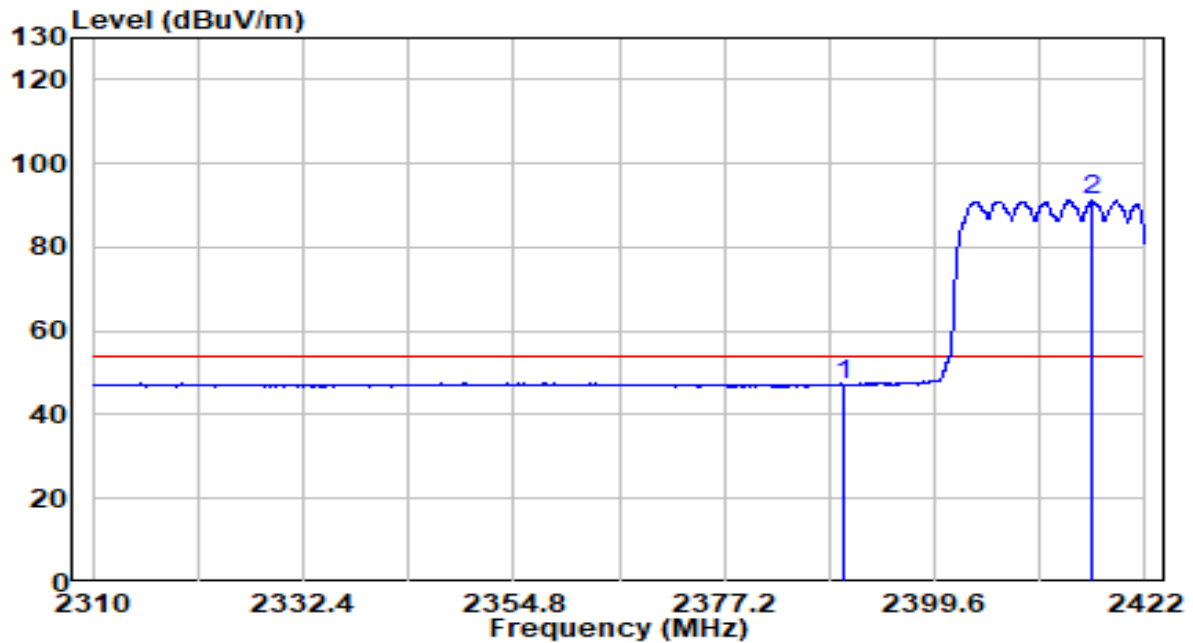


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	14.73	32.27	47.00	-7.00	54.00	Average
2	* 2416.344	58.73	32.39	91.12	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

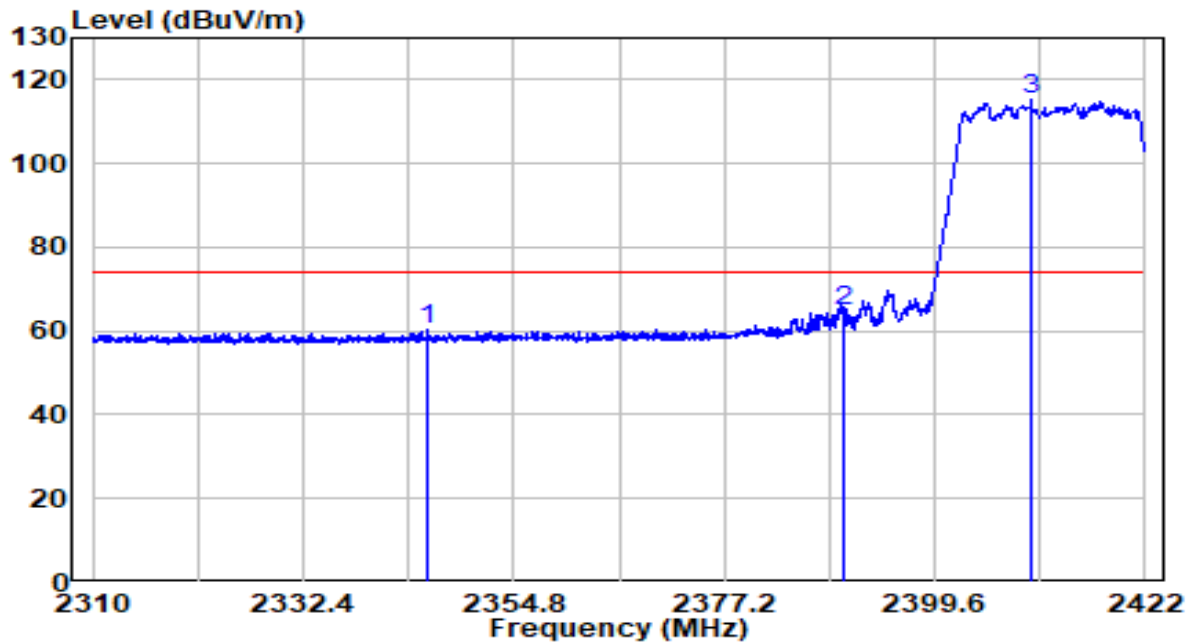


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2345.616	28.27	32.07	60.34	-13.66	74.00	Peak
2	2390.000	32.24	32.27	64.51	-9.49	74.00	Peak
3	* 2409.848	82.76	32.36	115.13	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz – CDD Mode	Test Voltage	120V/60Hz

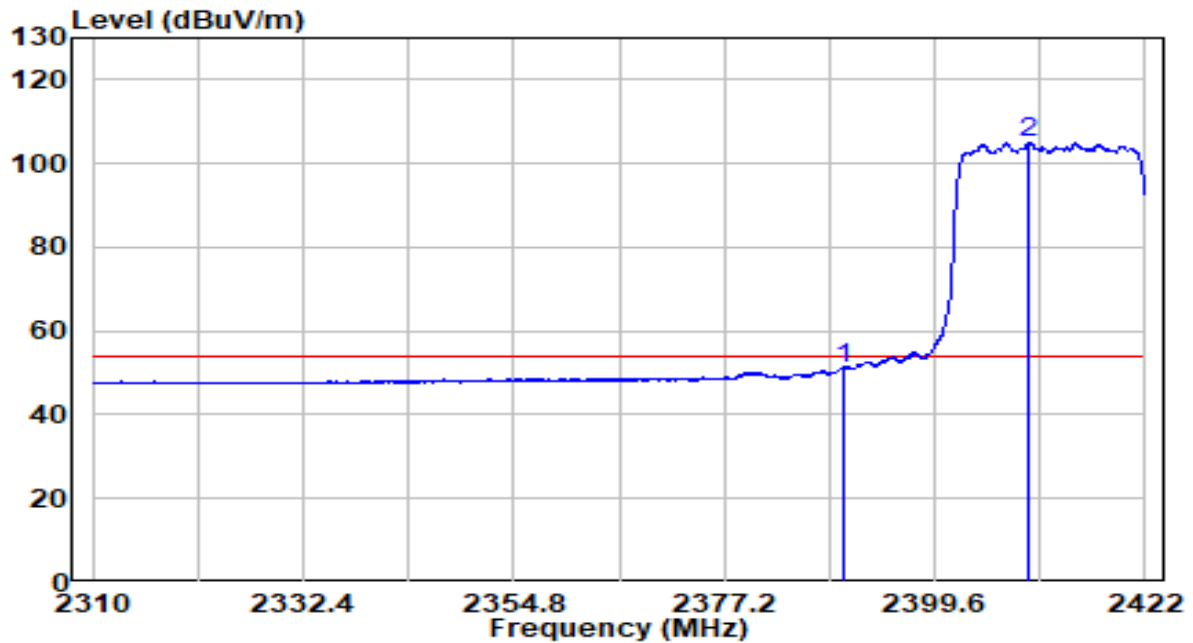


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	18.97	32.27	51.24	-2.76	54.00	Average
2	* 2409.680	72.43	32.36	104.79	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz – CDD Mode	Test Voltage	120V/60Hz

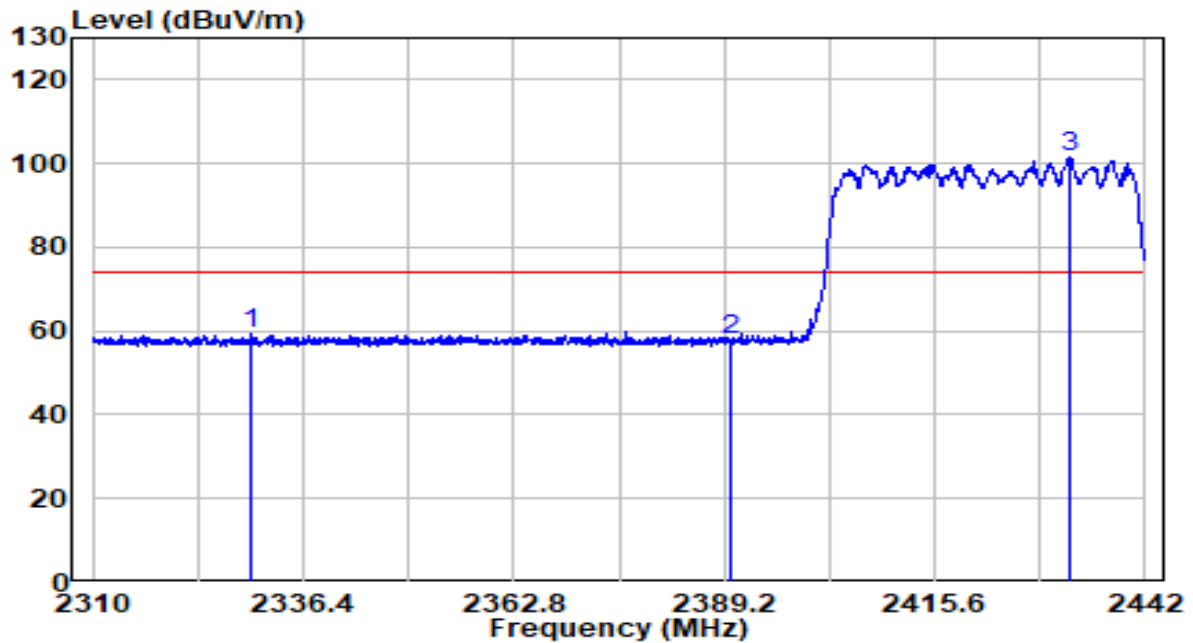


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2329.932	27.56	32.00	59.56	-14.44	74.00	Peak
2	2390.000	25.64	32.27	57.92	-16.08	74.00	Peak
3	* 2432.628	69.04	32.47	101.51	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz – CDD Mode	Test Voltage	120V/60Hz

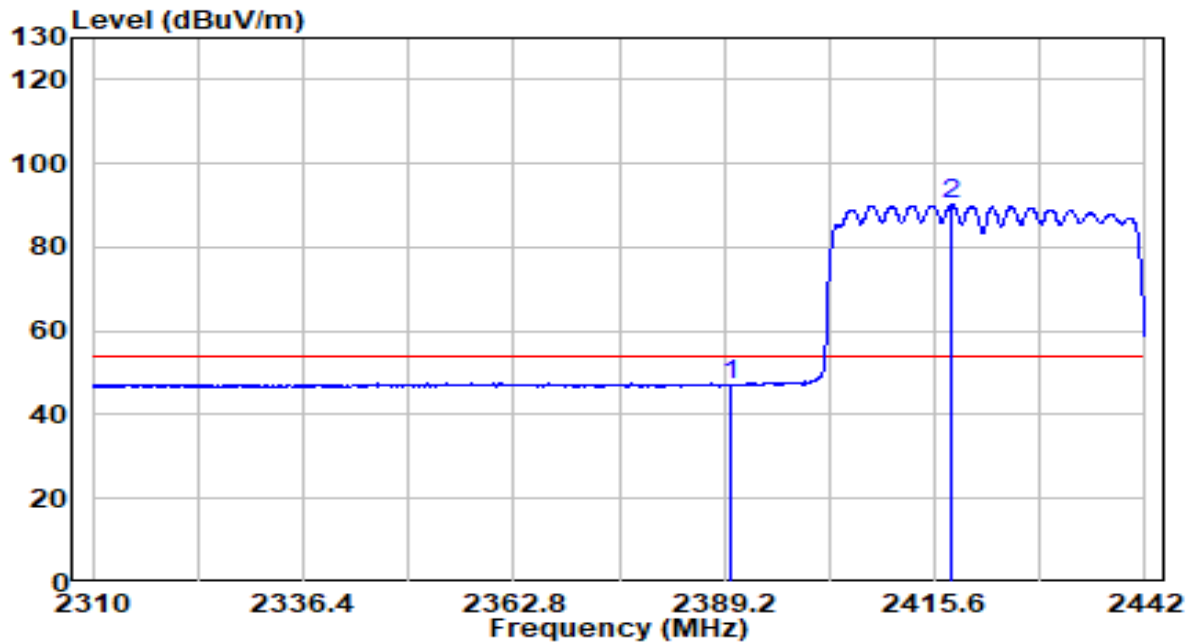


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	14.85	32.27	47.13	-6.87	54.00	Average
2	* 2417.712	57.71	32.40	90.11	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz – CDD Mode	Test Voltage	120V/60Hz

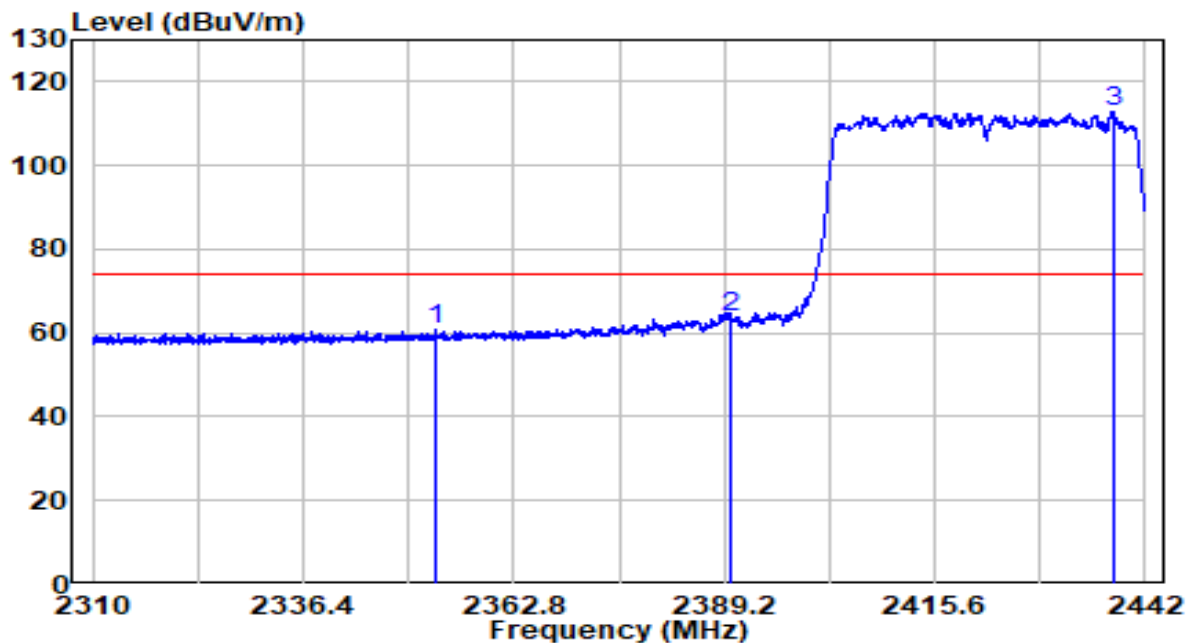


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2353.032	28.64	32.10	60.75	-13.25	74.00	Peak
2	2390.000	31.50	32.27	63.77	-10.23	74.00	Peak
3	* 2437.974	80.24	32.49	112.74	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-07
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	27°C/47%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz – CDD Mode	Test Voltage	120V/60Hz

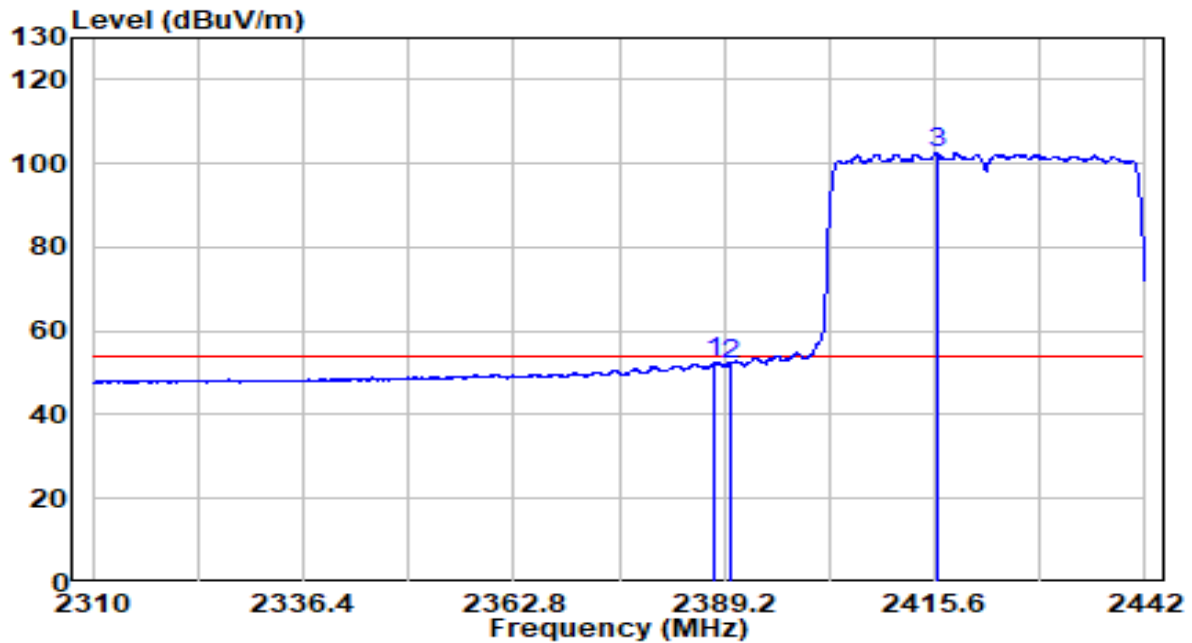


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.078	20.19	32.27	52.46	-1.54	54.00	Average
2	2390.000	19.77	32.27	52.04	-1.96	54.00	Average
3	* 2415.930	70.06	32.39	102.45	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-08
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.4°C/49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz – Beamforming Mode	Test Voltage	120V/60Hz

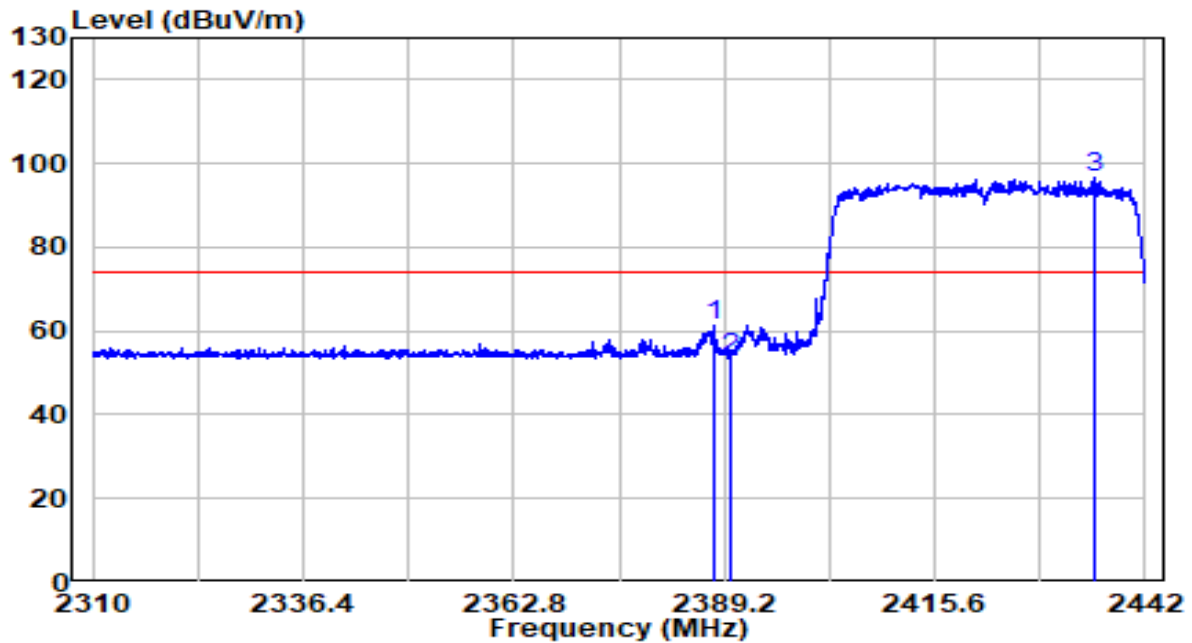


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2387.814	28.80	32.29	61.09	-12.91	74.00	Peak
2	2390.000	21.22	32.30	53.52	-20.48	74.00	Peak
3	* 2435.664	64.28	32.50	96.77	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-08
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.4°C/49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz – Beamforming Mode	Test Voltage	120V/60Hz

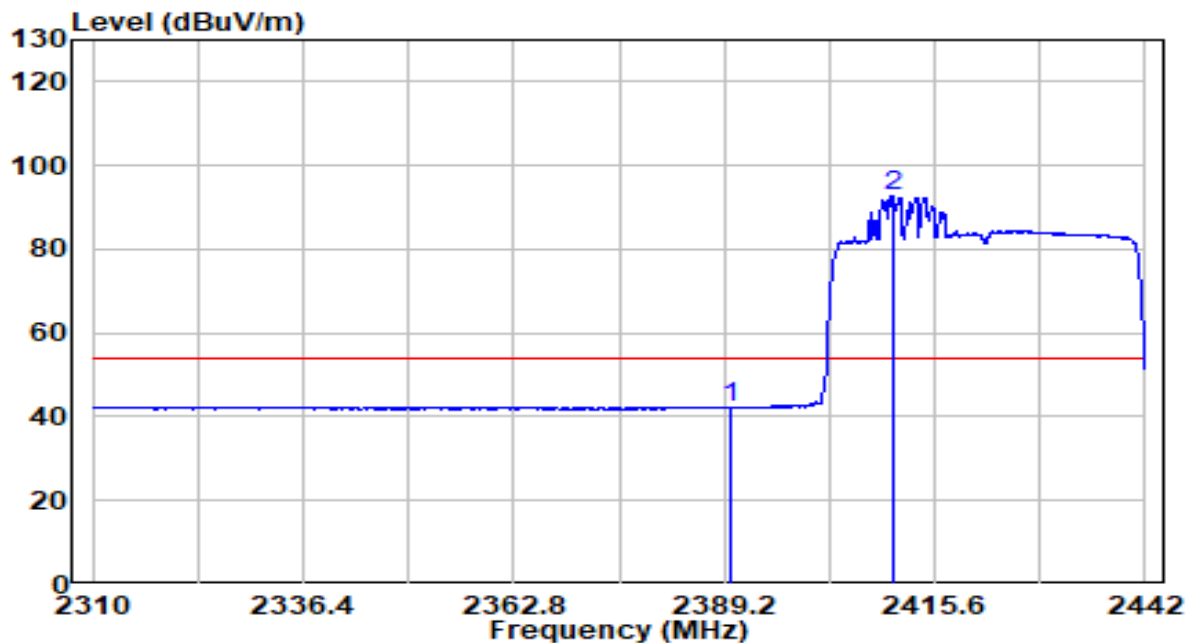


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	9.86	32.30	42.16	-11.84	54.00	Average
2	* 2410.254	60.24	32.39	92.63	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-08
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.4°C/49%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz – Beamforming Mode	Test Voltage	120V/60Hz

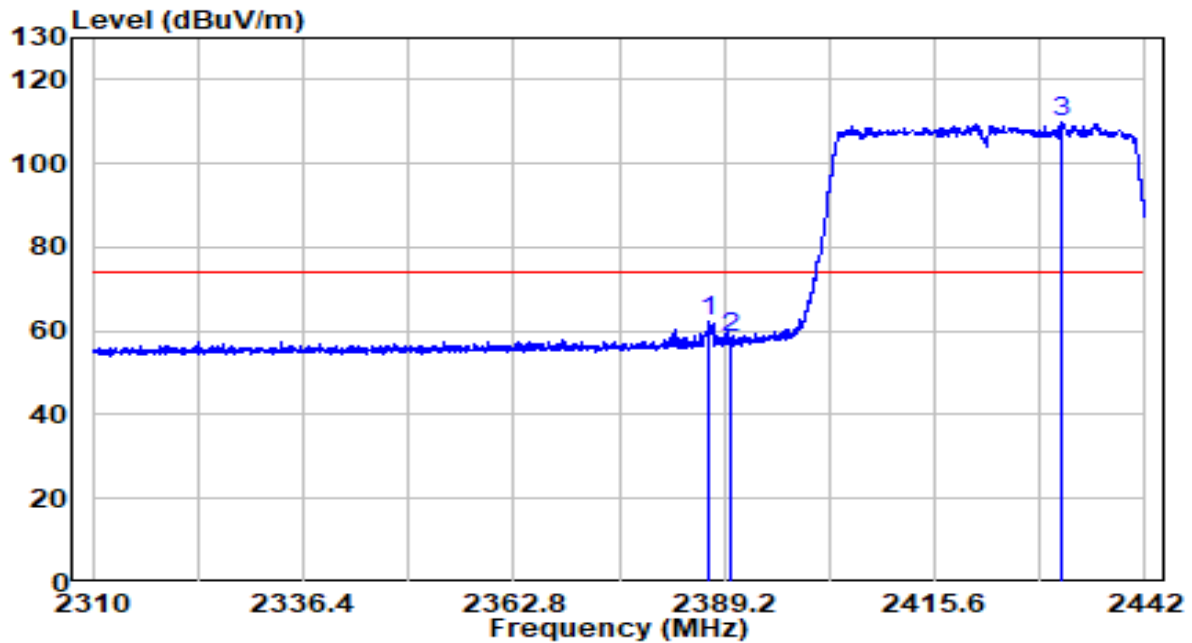


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2387.220	30.05	32.28	62.34	-11.66	74.00	Peak
2	2390.000	25.87	32.30	58.16	-15.84	74.00	Peak
3	* 2431.506	77.35	32.48	109.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-06-08
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.4°C/49%
Polarity	Vertical	Site / Test Engineer	AC2 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz – Beamforming Mode	Test Voltage	120V/60Hz

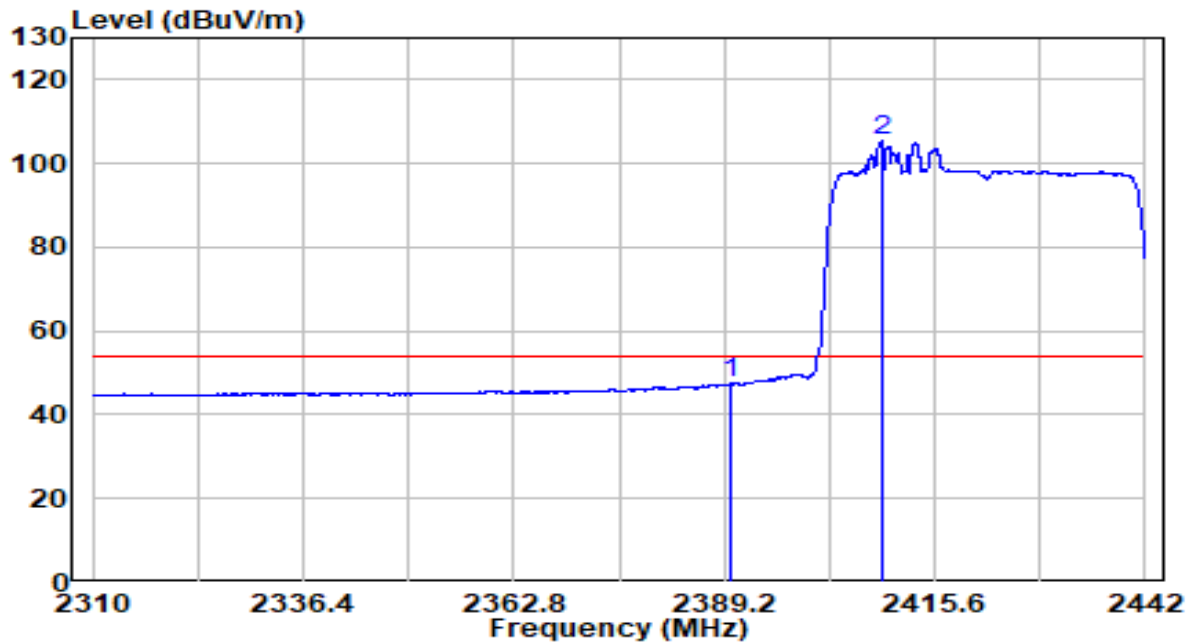

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	15.21	32.30	47.51	-6.49	54.00	Average
2	* 2408.934	73.01	32.38	105.38	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

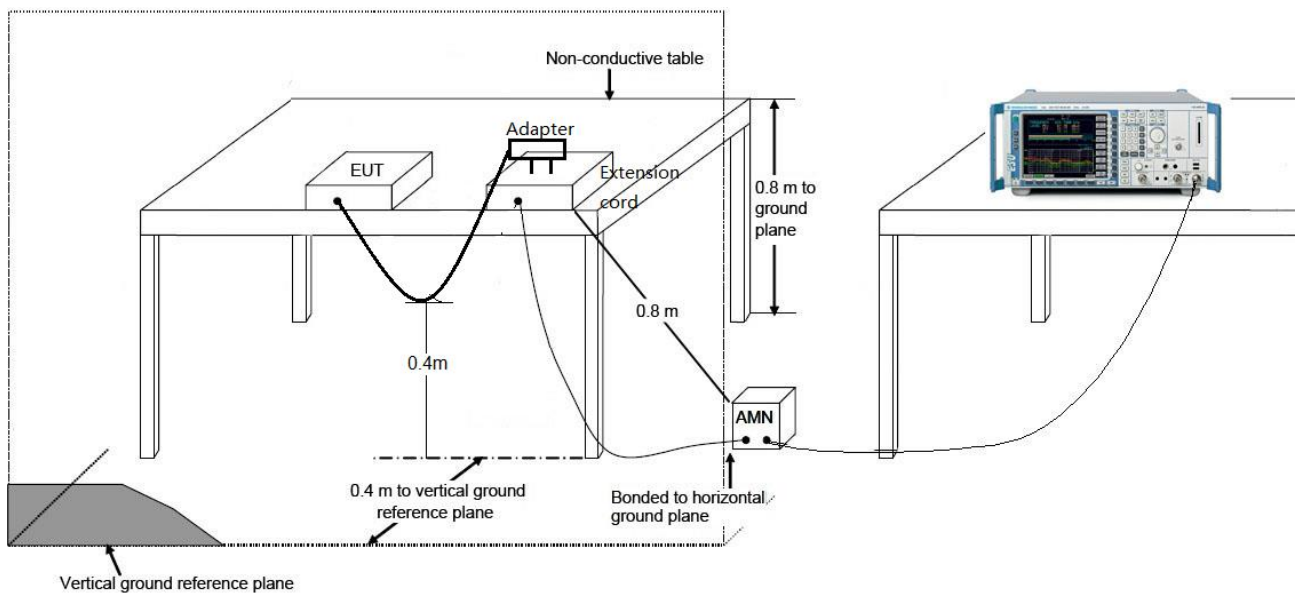

7.8.3.Test Result

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-05-13
Factor	CE_ENV216-L1 (Filter ON)_2020	Temp. / Humidity	22.4°C /45.6%
Polarity	Line1	Site / Test Engineer	SR2 / Peter Xu
Test Mode	1	Test Voltage	120V/60Hz

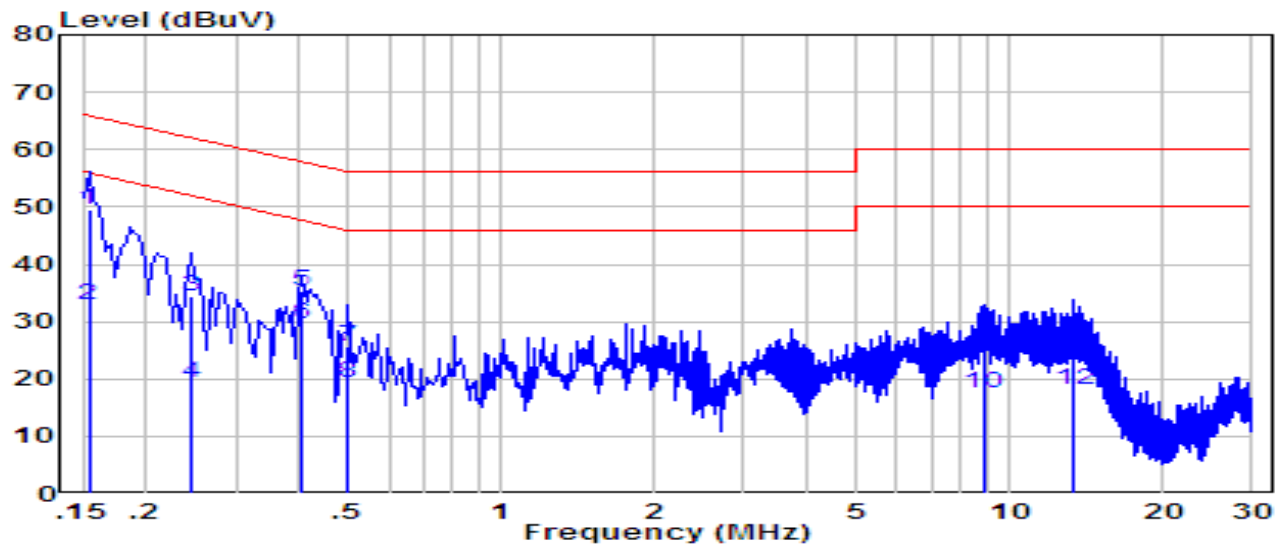


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	0.154	39.86	9.60	49.46	-16.32	65.78	QP
2		0.154	23.16	9.60	32.76	-23.02	55.78	Average
3		0.245	24.80	9.61	34.41	-27.51	61.92	QP
4		0.245	9.80	9.61	19.41	-32.51	51.92	Average
5		0.405	25.84	9.60	35.44	-22.31	57.75	QP
6		0.405	20.04	9.60	29.64	-18.11	47.75	Average
7		0.498	16.06	9.60	25.66	-30.37	56.03	QP
8		0.498	9.86	9.60	19.46	-26.57	46.03	Average
9		8.870	14.84	9.84	24.68	-35.32	60.00	QP
10		8.870	7.64	9.84	17.48	-32.52	50.00	Average
11		13.380	13.41	9.92	23.32	-36.68	60.00	QP
12		13.380	8.31	9.92	18.22	-31.78	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3200 Tri-Band Wi-Fi 6 Router	Date of Test	2020-05-13
Factor	CE_ENV216-N (Filter ON)_2020	Temp. / Humidity	22.4°C /45.6%
Polarity	Neutral	Site / Test Engineer	SR2 / Peter Xu
Test Mode	1	Test Voltage	120V/60Hz

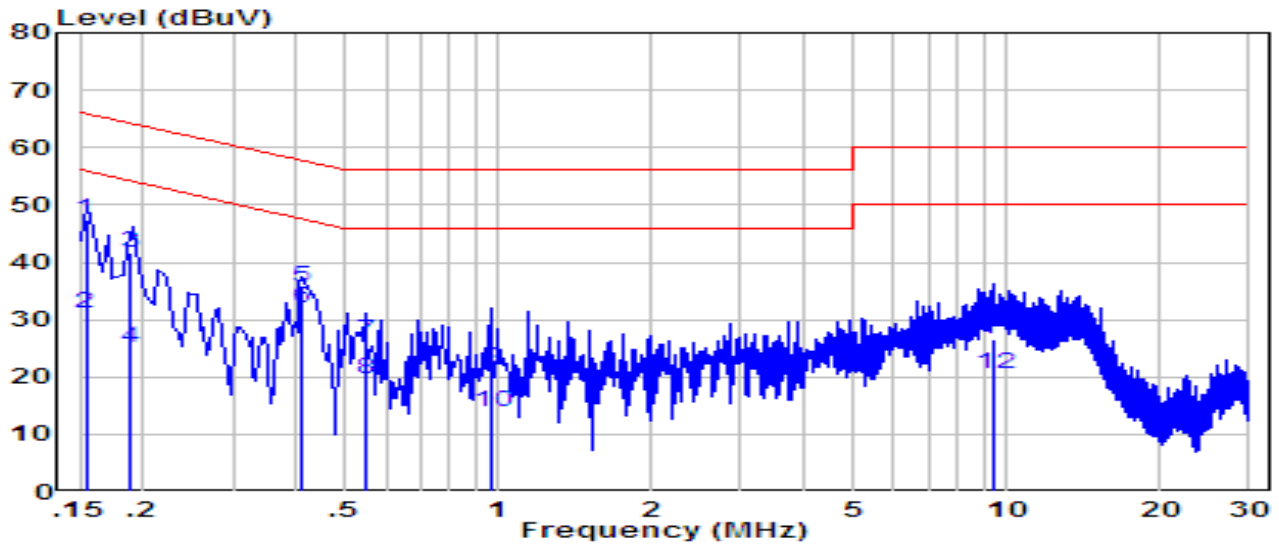

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.154	37.92	9.62	47.53	-18.25	65.78	QP
2	0.154	21.42	9.62	31.03	-24.75	55.78	Average
3	0.189	31.93	9.61	41.53	-22.55	64.08	QP
4	0.189	15.43	9.61	25.03	-29.05	54.08	Average
5	0.410	25.95	9.61	35.57	-22.08	57.65	QP
6	*	0.410	22.35	31.97	-15.68	47.65	Average
7	0.546	16.75	9.61	26.37	-29.63	56.00	QP
8	0.546	10.15	9.61	19.77	-26.23	46.00	Average
9	0.970	11.66	9.66	21.31	-34.69	56.00	QP
10	0.970	4.26	9.66	13.91	-32.09	46.00	Average
11	9.490	16.79	9.87	26.66	-33.34	60.00	QP
12	9.490	10.69	9.87	20.56	-29.44	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC Rules.

The End

Appendix A - Test Setup Photograph

Refer to “ 2007TW0001-UT” file.

Appendix B - EUT Photograph

Refer to “ 2007TW0001-UE” file.