



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	TP-Link Technologies Co., Ltd.
Applicant Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Nanshan, Shenzhen, 518057 China
FCC ID	TE7C3150V2
Manufacturer's company	TP-Link Technologies Co., Ltd.
Manufacturer Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Nanshan, Shenzhen, 518057 China

Product Name	AC3150 Wireless MU-MIMO Gigabit Router
Brand Name	TP-Link
Model No.	Archer C3150
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Nov. 02, 2016
Final Test Date	Feb. 06, 2017
Submission Type	Class II Change

Statement

Test result included in this report is for the IEEE 802.11n/ac and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r05, KDB 662911 D01 v02r01 and KDB644545 D01 v01r02**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	7
3.7. Table for Class II Change	7
3.8. Table for Supporting Units	8
3.9. EUT Operation during Test	8
3.10. Duty Cycle.....	8
3.11. Test Configurations	9
4. TEST RESULT	12
4.1. AC Power Line Conducted Emissions Measurement.....	12
4.2. Radiated Emissions Measurement.....	16
4.3. Emissions Measurement.....	24
4.4. Antenna Requirements	27
5. LIST OF MEASURING EQUIPMENTS	28
6. MEASUREMENT UNCERTAINTY.....	29
APPENDIX A. TEST PHOTOS	A1 ~ A4
PHOTOGRAPHS OF EUT V01	




History of This Test Report



1. VERIFICATION OF COMPLIANCE

Product Name : AC3150 Wireless MU-MIMO Gigabit Router
Brand Name : TP-Link
Model No. : Archer C3150
Applicant : TP-Link Technologies Co., Ltd.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 02, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Cliff Chang
SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.247(d)	Radiated Emissions	Complies
4.3	15.247(d)	Band Edge Emissions	Complies
4.4	15.203	Antenna Requirements	Complies

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM, 1024QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	<input checked="" type="checkbox"/> With beamforming For 802.11ac in 5GHz.	<input type="checkbox"/> Without beamforming

Antenna and Bandwidth

Antenna	Four (Tx)	
Bandwidth Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-11/Nss1-4
802.11ac (VHT40)	4	MCS 0-11/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20 and VHT40 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 in 2.4GHz.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating	Remark
Adapter	Huntkey	HKA06012050-7G	Input: 100-240V~1.5A, 50/60Hz Output: 12.0V, 5.0A	Cable (Non-shielded, 1.3m)
Other				
Power cable*1: Non-shielded, 1.5m				

3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Product Number	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	TP-LINK	T3060-NU000 1.0	3101500587	Dipole Antenna	RF-SMA-F	2	3
2	TP-LINK	T3060-NU000 1.0	3101500587	Dipole Antenna	RF-SMA-F	2	3
3	TP-LINK	T3060-NU000 1.0	3101500587	Dipole Antenna	RF-SMA-F	2	3
4	TP-LINK	T3060-NU000 1.0	3101500587	Dipole Antenna	RF-SMA-F	2	3

Note: The EUT has four antennas.

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11ac VHT20	MCS0/Nss1	6	1+2+3+4
Band Edge Emissions	11ac VHT20	MCS0/Nss1	6	1+2+3+4

Note: 1. VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

2. All the specification of test configurations and test modes were based on customer's request.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT with Adapter

For Radiated Emission test<Below 1GHz>:

Mode 1. EUT in Z axis with Adapter

Mode 2. EUT in Y axis with Adapter

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test<Above 1GHz>:

The EUT was performed at Y axis and Z axis position for Radiated emission above 1GHz test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.

Mode 1. EUT in Z axis

For Co-location MPE Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA5O1803-03) test is added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR5O1803AA

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Updating Chip model to BCM4366 C0 (MU-MIMO) from BCM4366 B1 (SU-MIMO).	Radiated Emissions 1GHz~10th Harmonic Band Edge Emissions
2. Modifying product function closed Repeater Mode.	AC Power Line Conducted Emissions
3. Adding an adapter (level 6) Model No.: HKA06012050-7G.	Radiated Emissions 9kHz~1GHz
4. Updating Flash Memory to 32M from 16M.	Radiated Emissions 9kHz~1GHz
5. Modifying brand name to TP-Link from TP-LINK.	
6. Changing FCC ID to TE7C3150V2 from TE7C3150.	Do not effect the test results.

Note: Item 1 will be based on original output power to re-test; after evaluating only verify 11ac VHT 20

Channel 6: 2437 MHz.

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB/ below 1GHz

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E4300	DoC
Notebook*2	Apple	Mac Book	DoC
Flash Disk2.0	Silicon Power	I-Series	DoC
Flash Disk3.0	Silicon Power	B06	DoC

For Test Site No: 03CH01-CB / above 1GHz

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook *4	DELL	E6430	DoC
Flash Disk	Silicon	I-Series	DoC
Flash Disk3.0	Transcend	639205 7755	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11n 錯誤! 找不到參照來源。 VHT20	1.934	1.940	99.67%	0.01	0.01

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

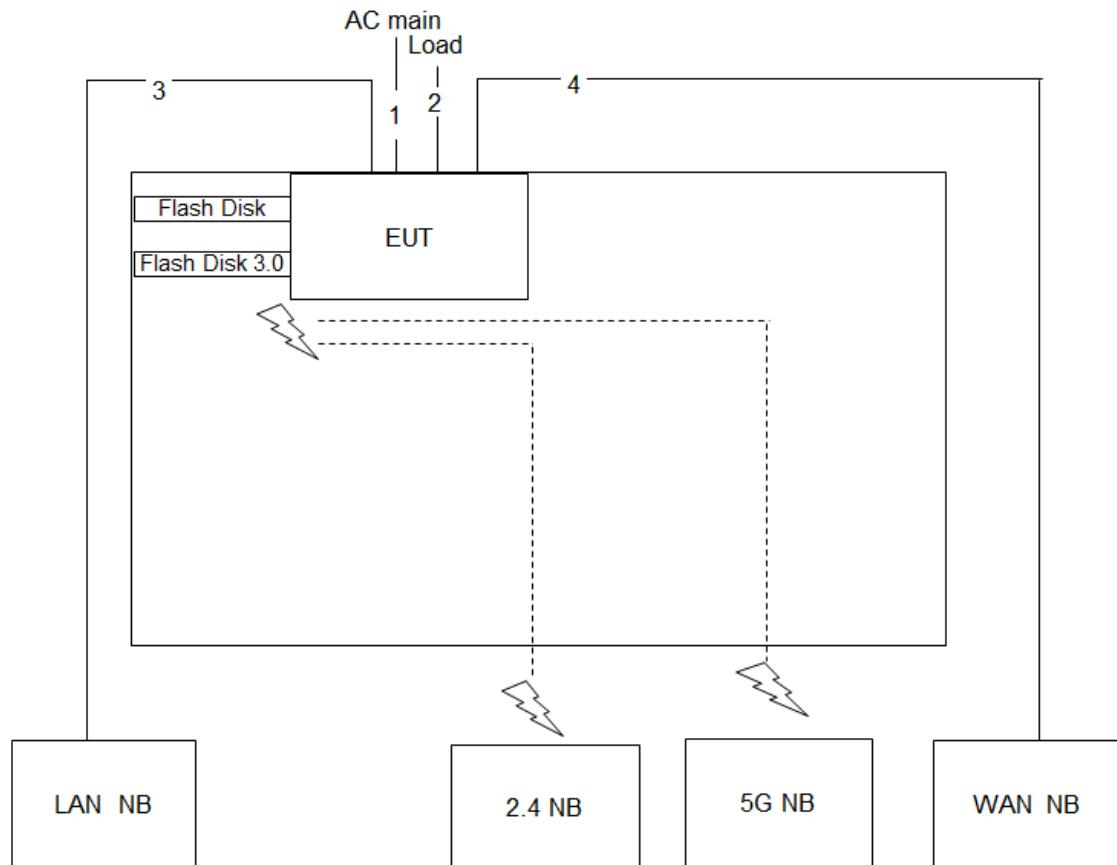

Item	Connection	Shielded	Length
1	Power cable	No	2.8m
2	RJ-45 cable*3	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

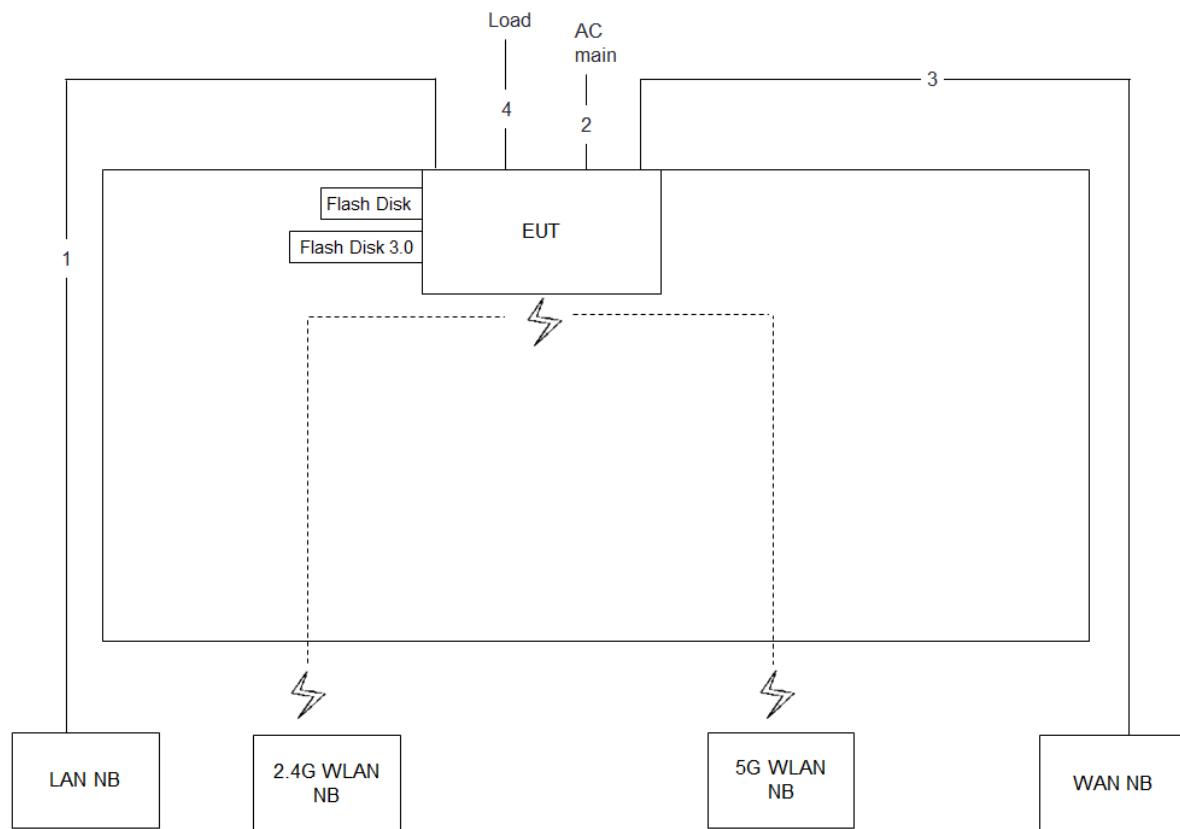

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	2.8m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	1.5m

Test Configuration: above 1GHz

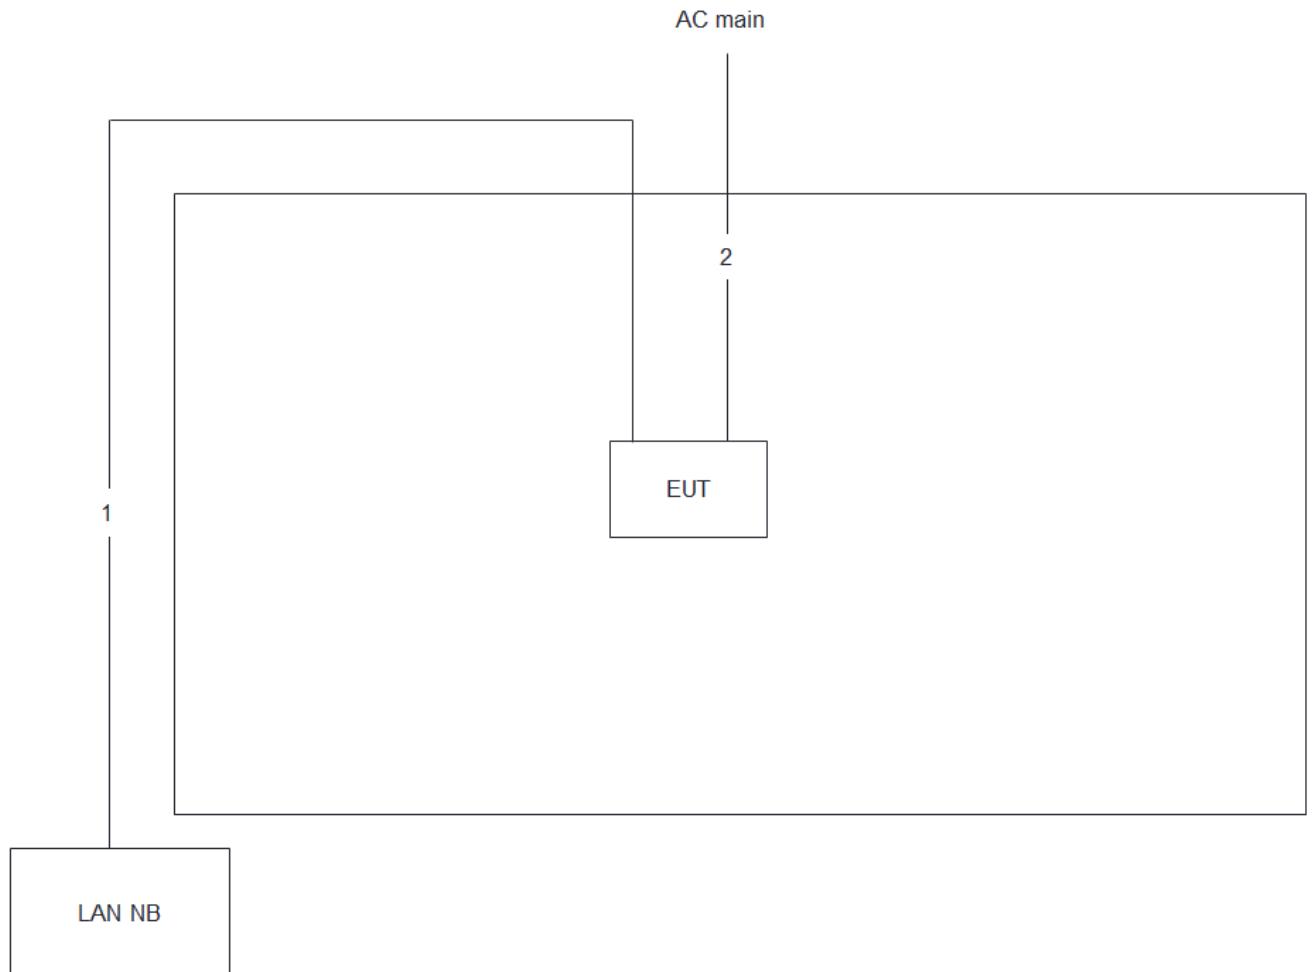

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	2.8m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

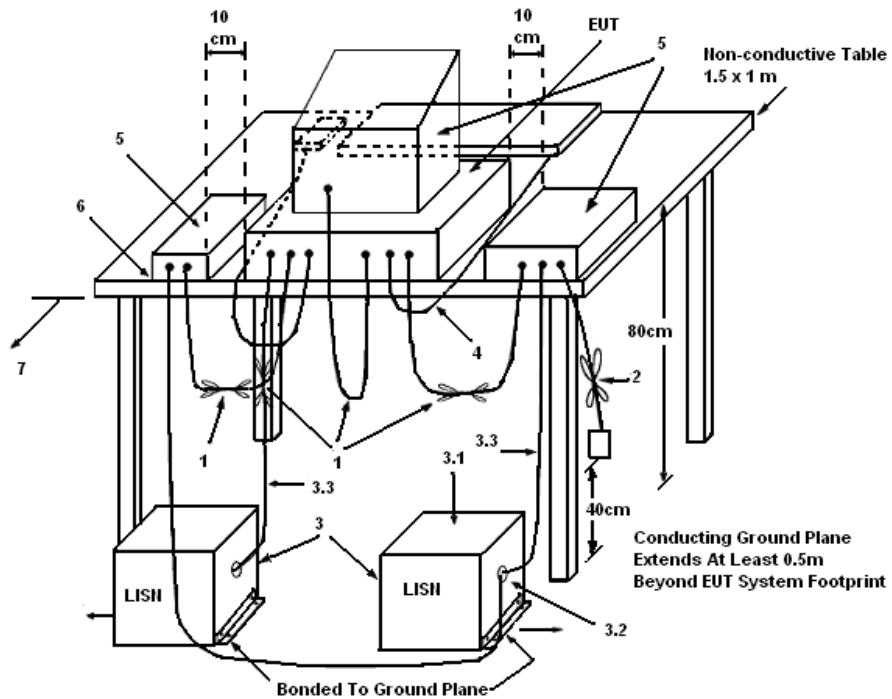

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	55%
Test Engineer	Gavin Peng	Phase	Line
Configuration	Normal Link		

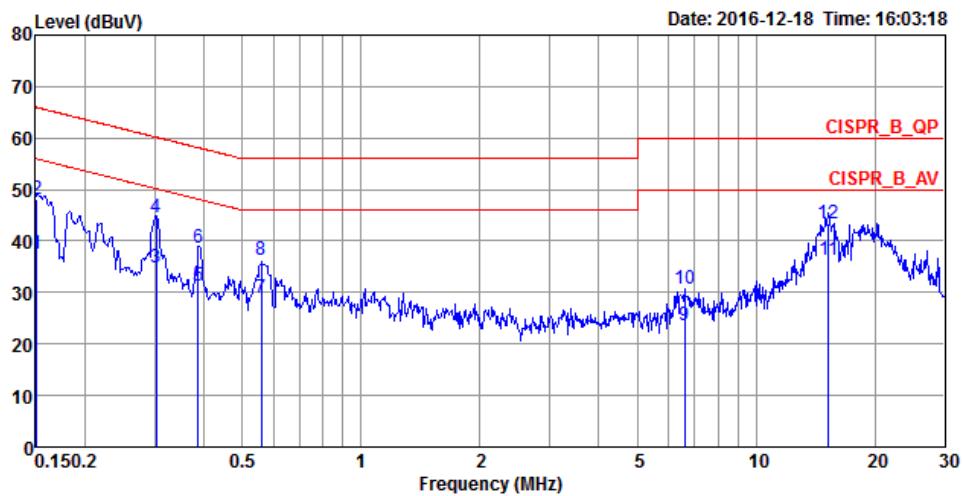

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
		Limit	Line	Level	Factor	Loss		
MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1508	37.53	-18.43	55.96	27.35	10.02	0.16	LINE Average
2	0.1508	48.21	-17.75	65.96	38.03	10.02	0.16	LINE QP
3	0.3035	34.81	-15.34	50.15	24.81	9.92	0.08	LINE Average
4	0.3035	44.54	-15.61	60.15	34.54	9.92	0.08	LINE QP
5	0.3872	31.41	-16.71	48.12	21.47	9.92	0.02	LINE Average
6	0.3872	38.80	-19.32	58.12	28.86	9.92	0.02	LINE QP
7	0.5581	28.82	-17.18	46.00	18.62	9.93	0.27	LINE Average
8	0.5581	36.35	-19.65	56.00	26.15	9.93	0.27	LINE QP
9	6.5921	23.63	-26.37	50.00	13.45	10.06	0.12	LINE Average
10	6.5921	30.76	-29.24	60.00	20.58	10.06	0.12	LINE QP
11	15.2261	36.44	-13.56	50.00	25.99	10.23	0.22	LINE Average
12	15.2261	43.33	-16.67	60.00	32.88	10.23	0.22	LINE QP

Temperature	22°C	Humidity	55%
Test Engineer	Gavin Peng	Phase	Neutral
Configuration	Normal Link		

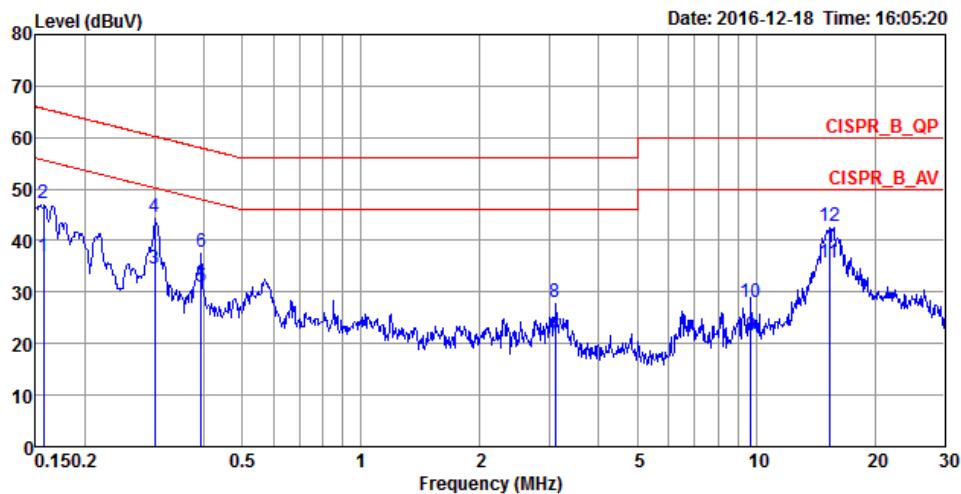

Freq	Level	Over Limit	Limit	Read Line	LISN		Cable Loss	Pol/Phase	Remark
					MHz	dBuV	dB	dBuV	dB
1	0.1573	36.76	-18.84	55.60	26.57	10.02	0.17	NEUTRAL	Average
2	0.1573	47.15	-18.45	65.60	36.96	10.02	0.17	NEUTRAL	QP
3	0.3003	34.50	-15.74	50.24	24.49	9.92	0.09	NEUTRAL	Average
4	0.3003	44.54	-15.70	60.24	34.53	9.92	0.09	NEUTRAL	QP
5	0.3934	30.85	-17.14	47.99	20.92	9.92	0.01	NEUTRAL	Average
6	0.3934	37.91	-20.08	57.99	27.98	9.92	0.01	NEUTRAL	QP
7	3.1066	21.17	-24.83	46.00	11.11	9.98	0.08	NEUTRAL	Average
8	3.1066	28.18	-27.82	56.00	18.12	9.98	0.08	NEUTRAL	QP
9	9.7051	21.41	-28.59	50.00	11.12	10.14	0.15	NEUTRAL	Average
10	9.7051	27.94	-32.06	60.00	17.65	10.14	0.15	NEUTRAL	QP
11	15.3070	35.65	-14.35	50.00	25.20	10.23	0.22	NEUTRAL	Average
12	15.3070	42.71	-17.29	60.00	32.26	10.23	0.22	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Radiated Emissions Measurement

4.2.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.2.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.2.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

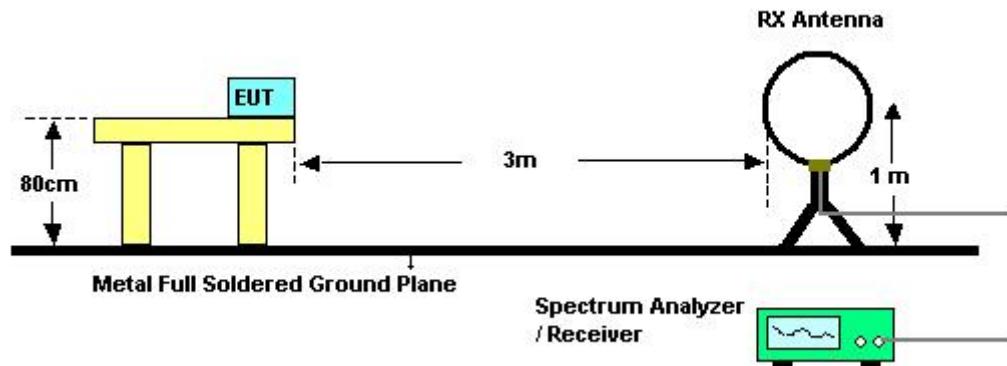

For Radiated Emissions: 30MHz~1GHz

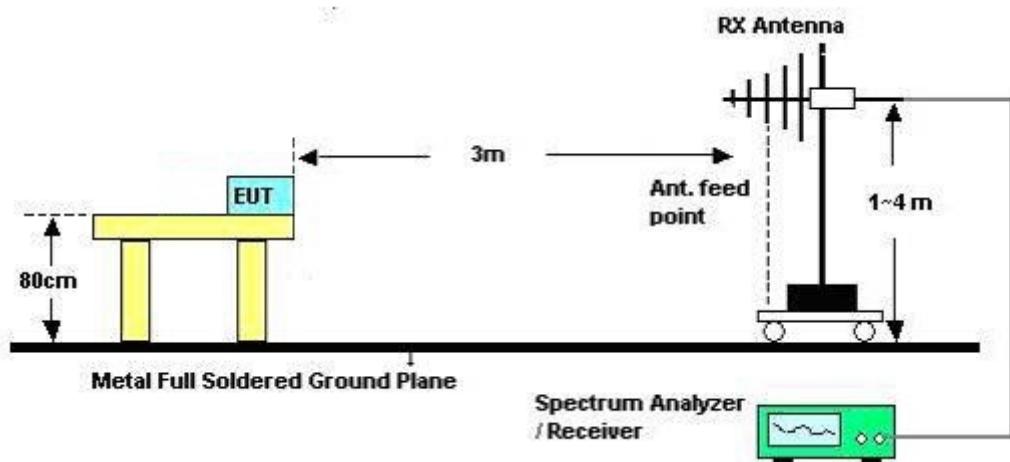

For Radiated Emissions: Above 1GHz

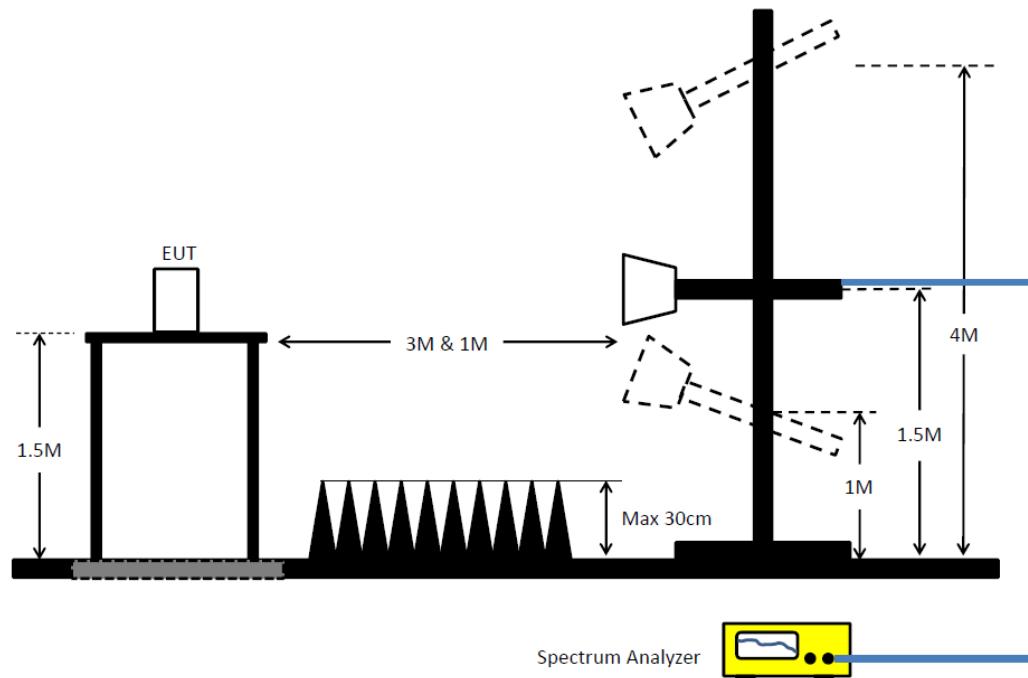

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	51%
Test Engineer	Nyle Chang, Mason Chen	Configurations	Normal Link / Mode 1
Test Date	Feb. 06, 2017		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.2.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24°C	Humidity	51%
Test Engineer	Nyle Chang, Mason Chen	Configurations	Normal Link / Mode 1

Horizontal

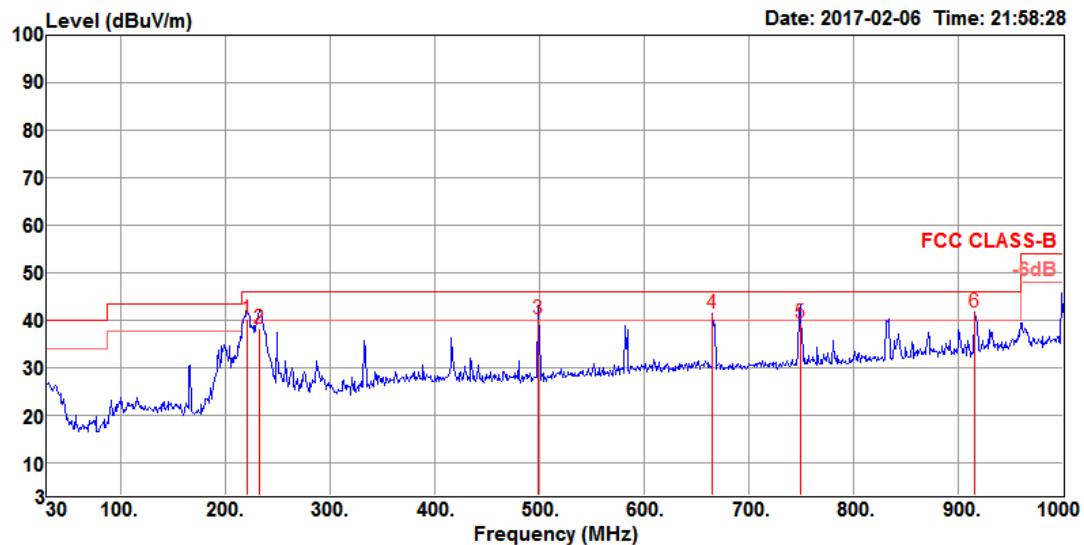

Freq	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	Level	Line									
1	221.09	40.34	46.00	-5.66	54.00	1.68	16.99	32.33	123	134 QP	HORIZONTAL
2	232.73	38.12	46.00	-7.88	51.00	1.72	17.73	32.33	100	330 QP	HORIZONTAL
3	498.51	40.25	46.00	-5.75	46.01	2.57	23.97	32.30	210	36 QP	HORIZONTAL
4	665.35	41.44	46.00	-4.56	44.82	2.98	26.03	32.39	125	164 Peak	HORIZONTAL
5	748.77	39.26	46.00	-6.74	42.00	3.16	26.38	32.28	123	197 QP	HORIZONTAL
6	915.61	41.56	46.00	-4.44	41.74	3.52	27.83	31.53	100	169 Peak	HORIZONTAL

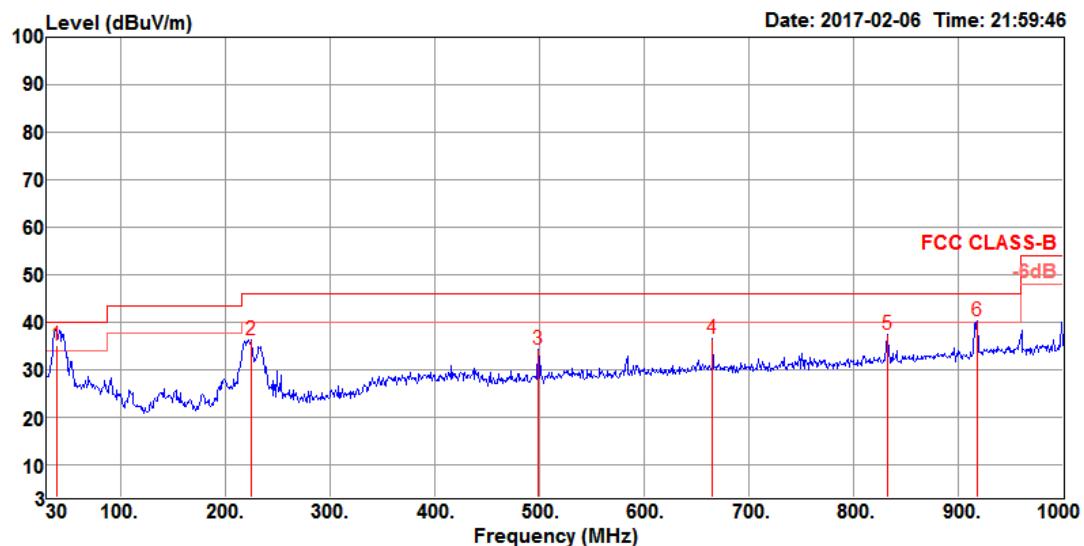Vertical


Freq	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
	Level	Line			Loss	Antenna Factor	Preamp Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	38.73	34.92	40.00	-5.08	46.00	0.69	20.93	32.70	100	222	QP VERTICAL
2	224.97	36.29	46.00	-9.71	49.70	1.70	17.22	32.33	100	302	Peak VERTICAL
3	498.51	34.32	46.00	-11.68	40.08	2.57	23.97	32.30	200	108	Peak VERTICAL
4	665.35	36.38	46.00	-9.62	39.76	2.98	26.03	32.39	300	106	Peak VERTICAL
5	832.19	37.28	46.00	-8.72	38.74	3.36	27.20	32.02	200	341	Peak VERTICAL
6	917.55	40.13	46.00	-5.87	40.31	3.52	27.83	31.53	200	70	Peak VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.2.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	24°C	Humidity	51%
Test Engineer	Nyle Change, Mason Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Jan. 03, 2017 ~ Jan. 05, 2017		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			Antenna	Preamp					
		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg		
1	4873.58	32.98	54.00	-21.02	41.68	7.80	32.68	49.18	189	211	Average	HORIZONTAL
2	4883.06	45.88	74.00	-28.12	54.55	7.81	32.71	49.19	189	211	Peak	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			Antenna	Preamp					
		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg		
1	4880.30	46.52	74.00	-27.48	55.23	7.80	32.68	49.19	173	126	Peak	VERTICAL
2	4886.12	33.14	54.00	-20.86	41.81	7.81	32.71	49.19	173	126	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.3. Emissions Measurement

4.3.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.3.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.2.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11.0 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.3.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.2.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.2.4.

4.3.5. Test Deviation

There is no deviation with the original standard.


4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	51%
Test Engineer	Nyle Change, Mason Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel 6

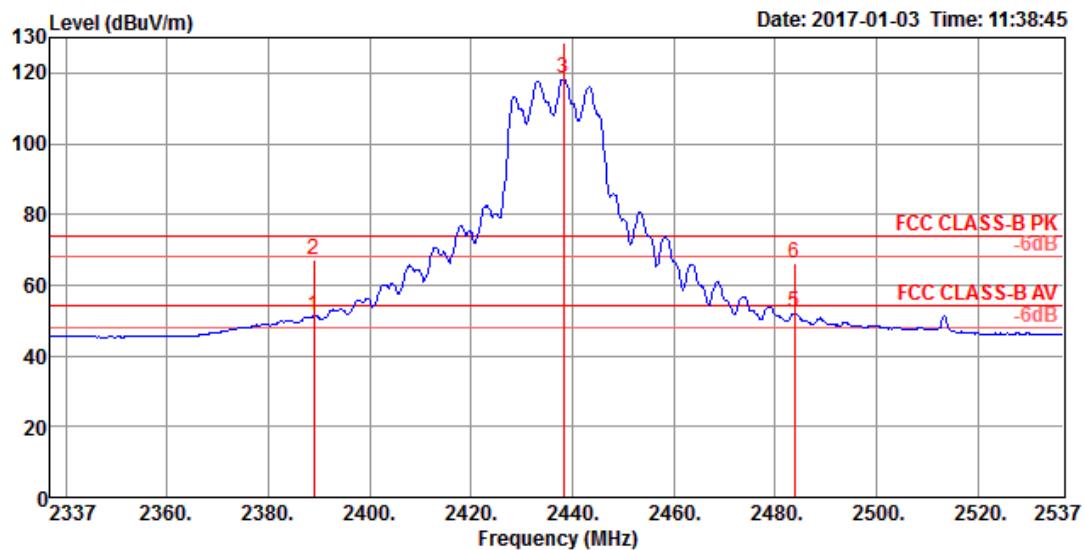

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB						
MHz	dBuV/m	dBuV/m	dB				dB	dB/m		cm	deg		
1	2389.00	51.22	54.00	-2.78	18.56	4.76	27.90	0.00	150	181	Average	VERTICAL	
2	2389.00	67.26	74.00	-6.74	34.60	4.76	27.90	0.00	150	181	Peak	VERTICAL	
3 @	2438.20	118.33			85.61	4.86	27.86	0.00	150	181	Average	VERTICAL	
4 @	2438.20	128.54			95.82	4.86	27.86	0.00	150	181	Peak	VERTICAL	
5	2483.80	52.17	54.00	-1.83	19.39	4.97	27.81	0.00	150	181	Average	VERTICAL	
6	2483.80	66.10	74.00	-7.90	33.32	4.97	27.81	0.00	150	181	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 2437 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.4. Antenna Requirements

4.4.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further,

4.4.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 14, 2016	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jun. 28, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 21, 2016	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%