


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	2.4GHz + 5GHz band 1 + 5GHz band 4

Horizontal

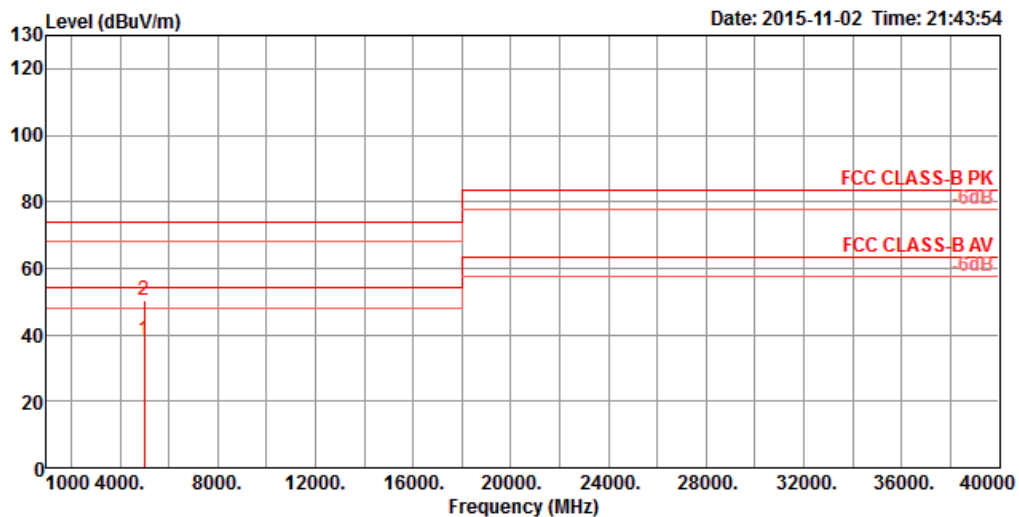

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5000.40	38.24	54.00	-15.76	34.18	6.31	31.40	33.65	177	338 Average	HORIZONTAL
2	5001.35	50.45	74.00	-23.55	46.39	6.31	31.40	33.65	177	338 Peak	HORIZONTAL

Vertical

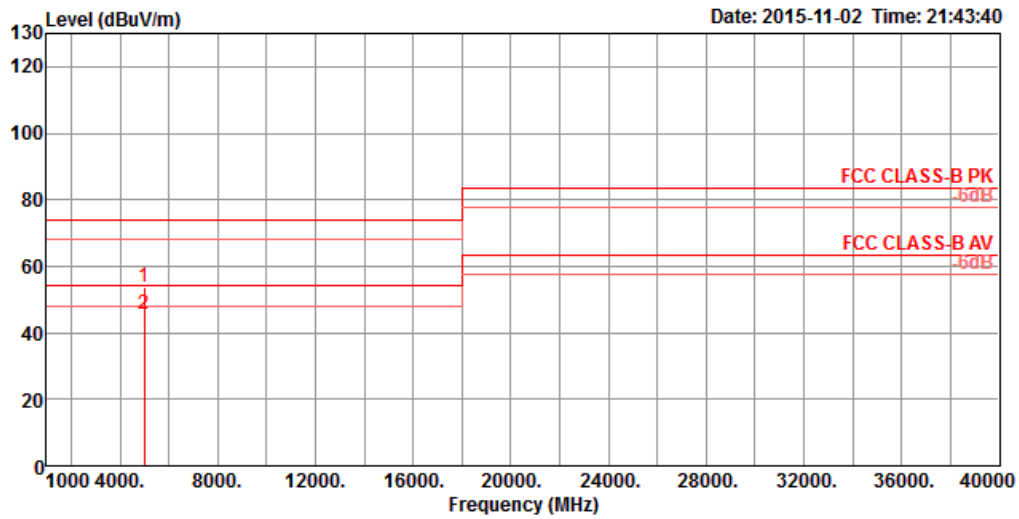

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5000.09	53.93	74.00	-20.07	49.87	6.31	31.40	33.65	100	16 Peak	VERTICAL
2	5000.29	45.44	54.00	-8.56	41.38	6.31	31.40	33.65	100	16 Average	VERTICAL