



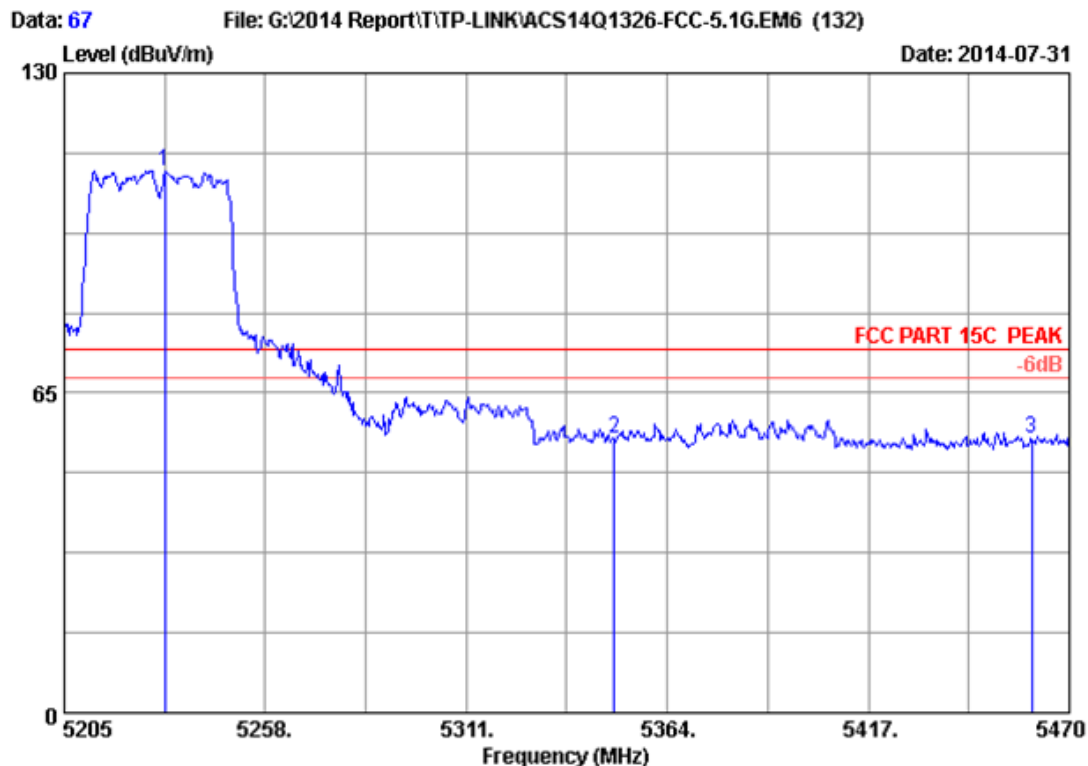

Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH46 5230MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5231.500	33.57	9.01	35.70	103.26	110.14	74.00	-36.14	Peak
2	5350.000	33.76	9.13	35.70	48.67	55.86	74.00	18.14	Peak
3	5460.000	33.94	9.25	35.70	48.31	55.80	74.00	18.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

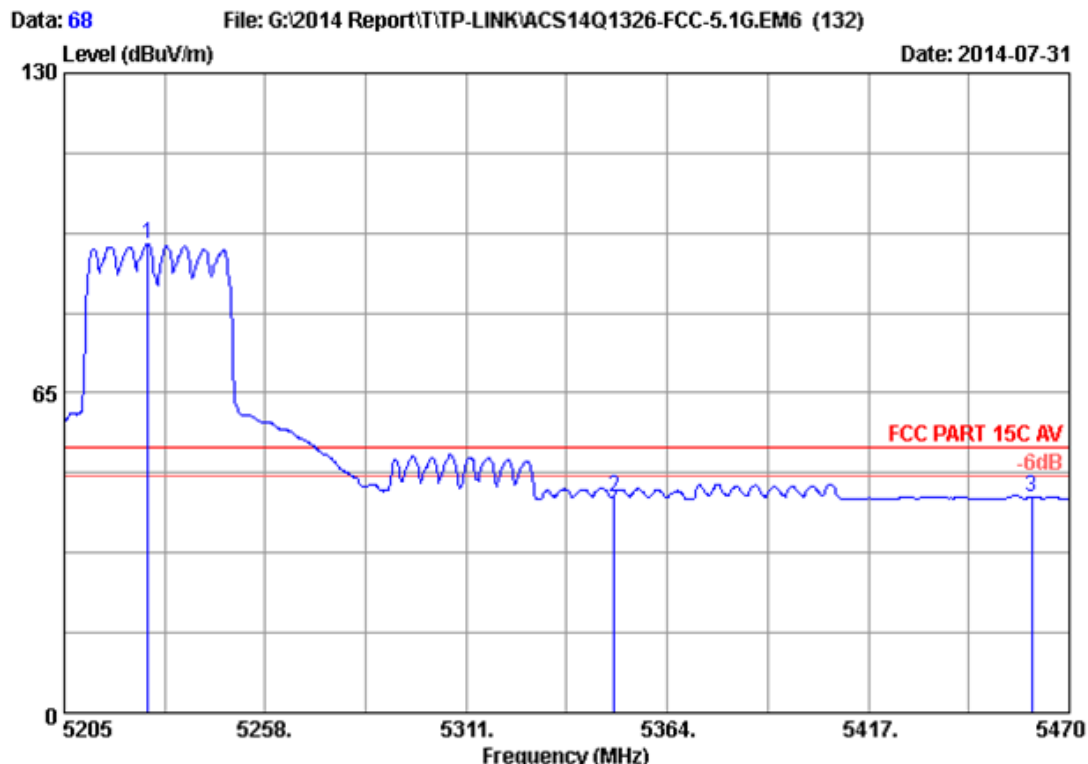

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH46 5230MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5226.995	33.56	9.00	35.70	88.43	95.29	54.00	-41.29	Average
2	5350.000	33.76	9.13	35.70	36.78	43.97	54.00	10.03	Average
3	5460.000	33.94	9.25	35.70	36.36	43.85	54.00	10.15	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

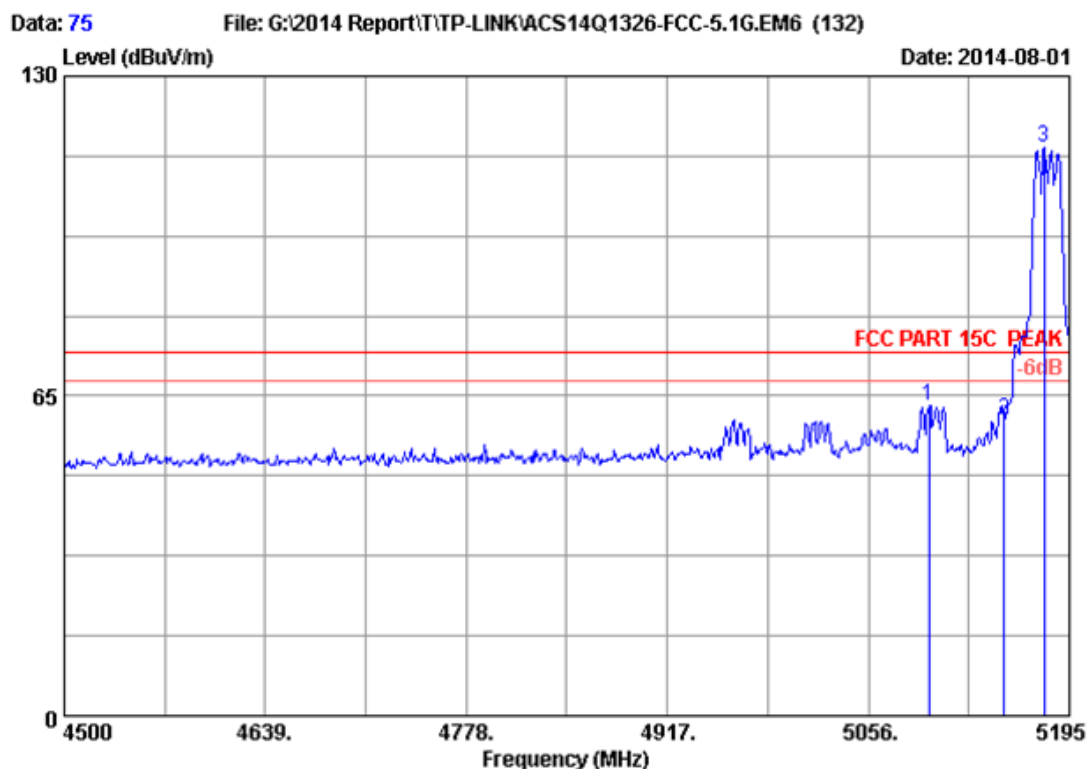

Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT20 CH36 5180MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5097.700	33.36	8.87	35.70	56.64	63.17	74.00	10.83	Peak
2	5150.000	33.44	8.92	35.70	53.33	59.99	74.00	14.01	Peak
3	5177.625	33.48	8.95	35.70	108.85	115.58	74.00	-41.58	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.



Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT20 CH36 5180MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	5097.700	33.36	8.87	35.70	47.01	53.54	54.00	0.46	Average
2	5150.000	33.44	8.92	35.70	40.81	47.47	54.00	6.53	Average
3	5177.625	33.48	8.95	35.70	97.78	104.51	54.00	-50.51	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

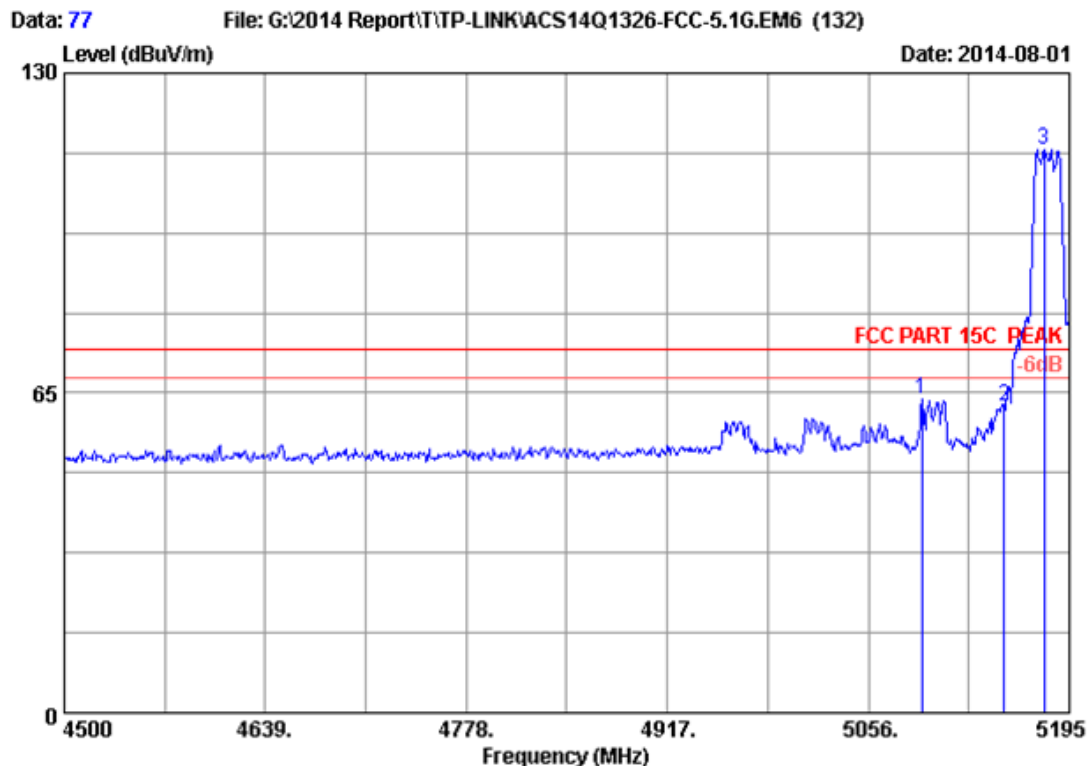

Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT20 CH36 5180MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5092.835	33.35	8.86	35.70	57.14	63.65	74.00	10.35	Peak
2	5150.000	33.44	8.92	35.70	55.66	62.32	74.00	11.68	Peak
3	5177.625	33.48	8.95	35.70	107.83	114.56	74.00	-40.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.



Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT20 CH36 5180MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5097.700	33.36	8.87	35.70	47.16	53.69	54.00	0.31	Average
2	5150.000	33.44	8.92	35.70	41.02	47.68	54.00	6.32	Average
3	5177.625	33.48	8.95	35.70	97.83	104.56	54.00	-50.56	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

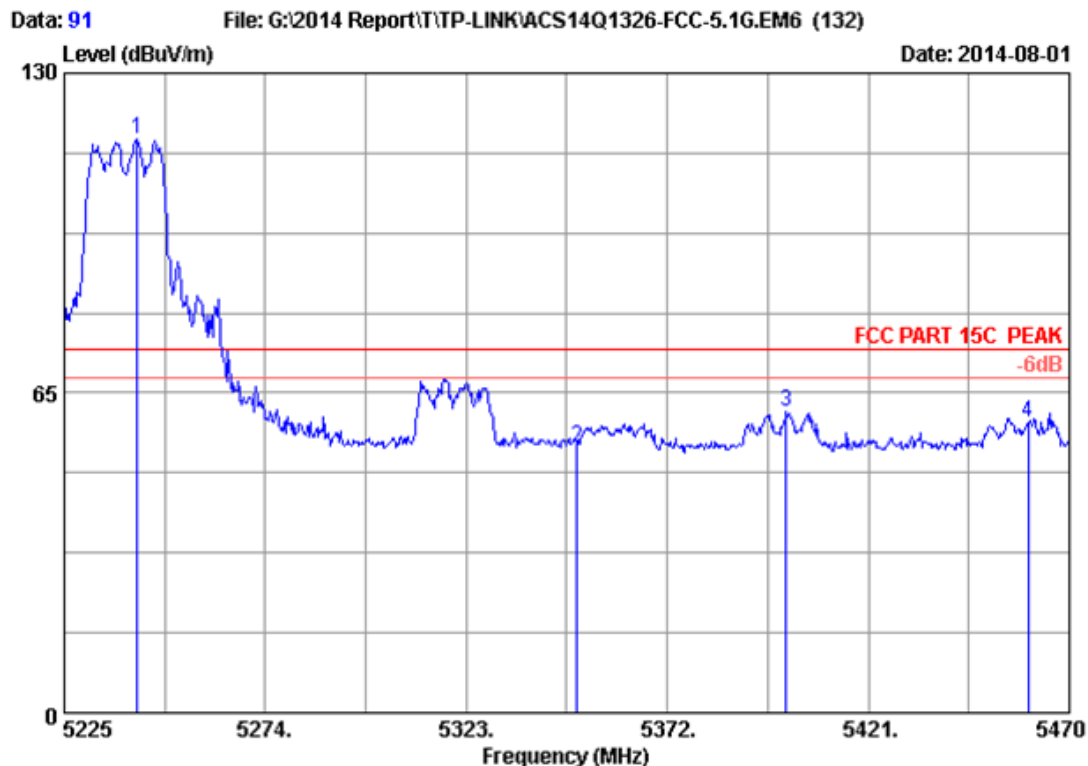

Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT20 CH48 5240MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5242.885	33.59	9.02	35.70	109.62	116.53	74.00	-42.53	Peak
2	5350.000	33.76	9.13	35.70	46.90	54.09	74.00	19.91	Peak
3	5400.910	33.84	9.18	35.70	53.98	61.30	74.00	12.70	Peak
4	5460.000	33.94	9.25	35.70	51.36	58.85	74.00	15.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

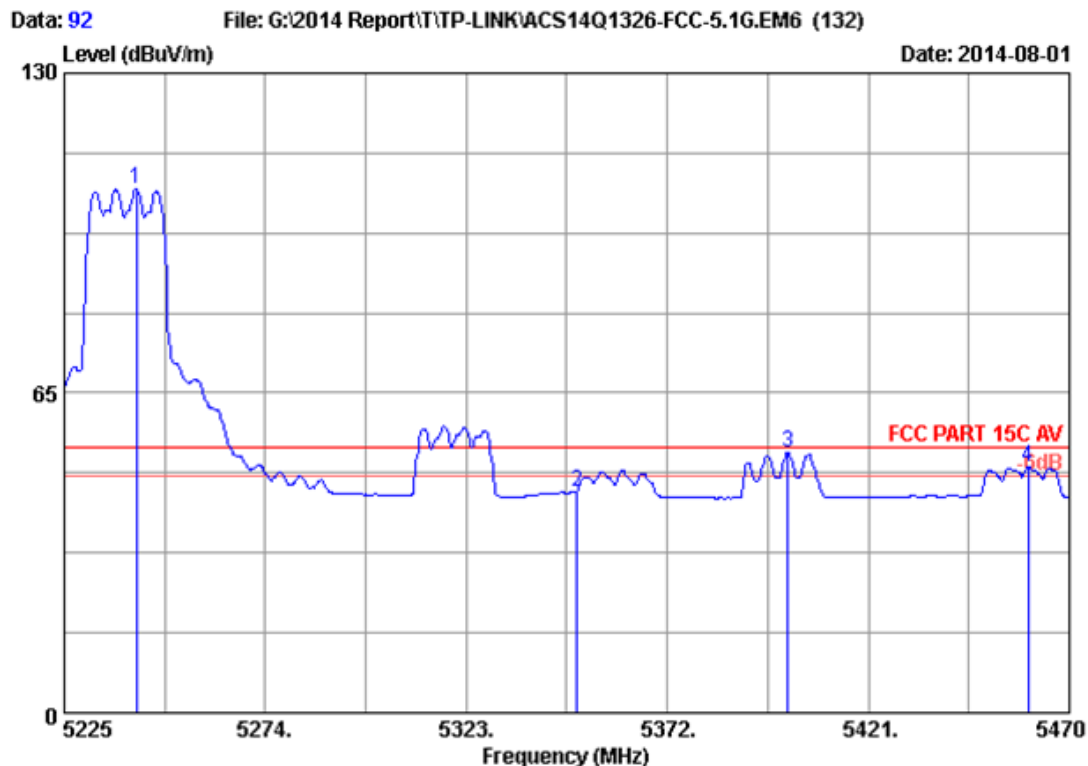

Site no. : 3m Chamber Data no. : 92
Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 24°C/56% Engineer : Leo-Li
EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
Power Rating : DC 12V From Adapter Input AC 120V/60Hz
Test Mode : IEEE802.11acVHT20 CH48 5240MHz Tx
M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5242.640	33.59	9.02	35.70	99.54	106.45	54.00	-52.45	Average
2	5350.000	33.76	9.13	35.70	37.78	44.97	54.00	9.03	Average
3	5401.400	33.84	9.19	35.70	45.47	52.80	54.00	1.20	Average
4	5460.000	33.94	9.25	35.70	42.53	50.02	54.00	3.98	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

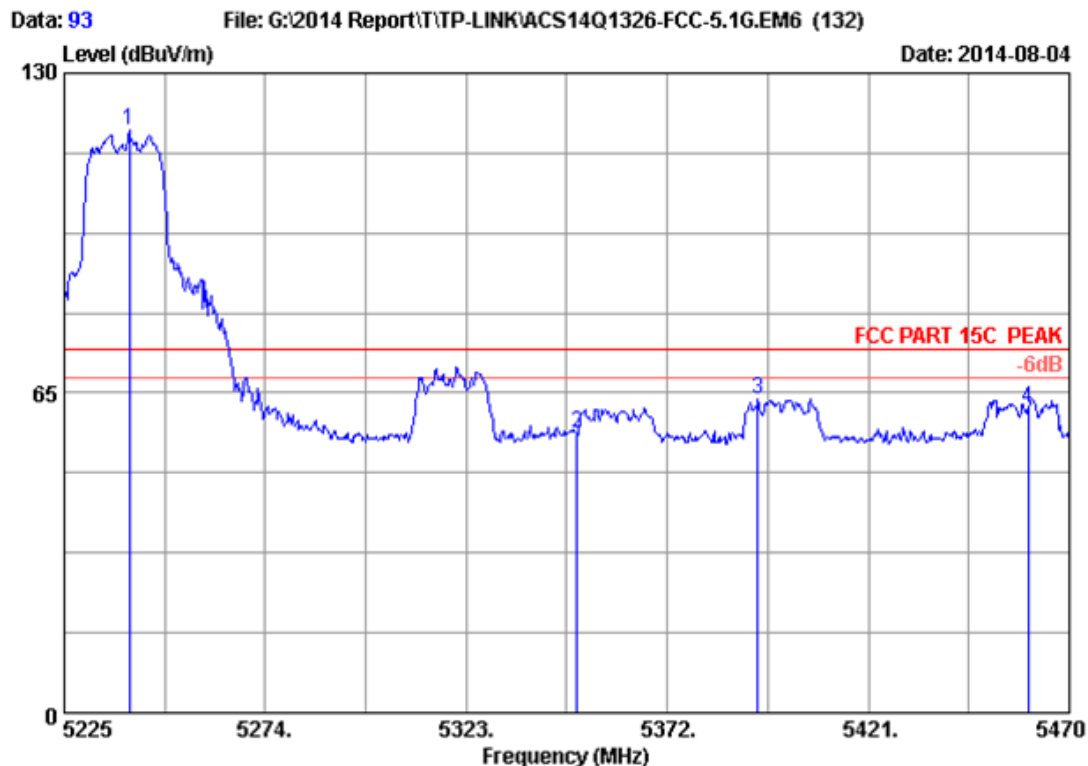

Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT20 CH48 5240MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.925	33.59	9.02	35.70	111.35	118.26	74.00	-44.26	Peak
2	5350.000	33.76	9.13	35.70	49.55	56.74	74.00	17.26	Peak
3	5394.050	33.83	9.18	35.70	56.37	63.68	74.00	10.32	Peak
4	5460.000	33.94	9.25	35.70	54.27	61.76	74.00	12.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

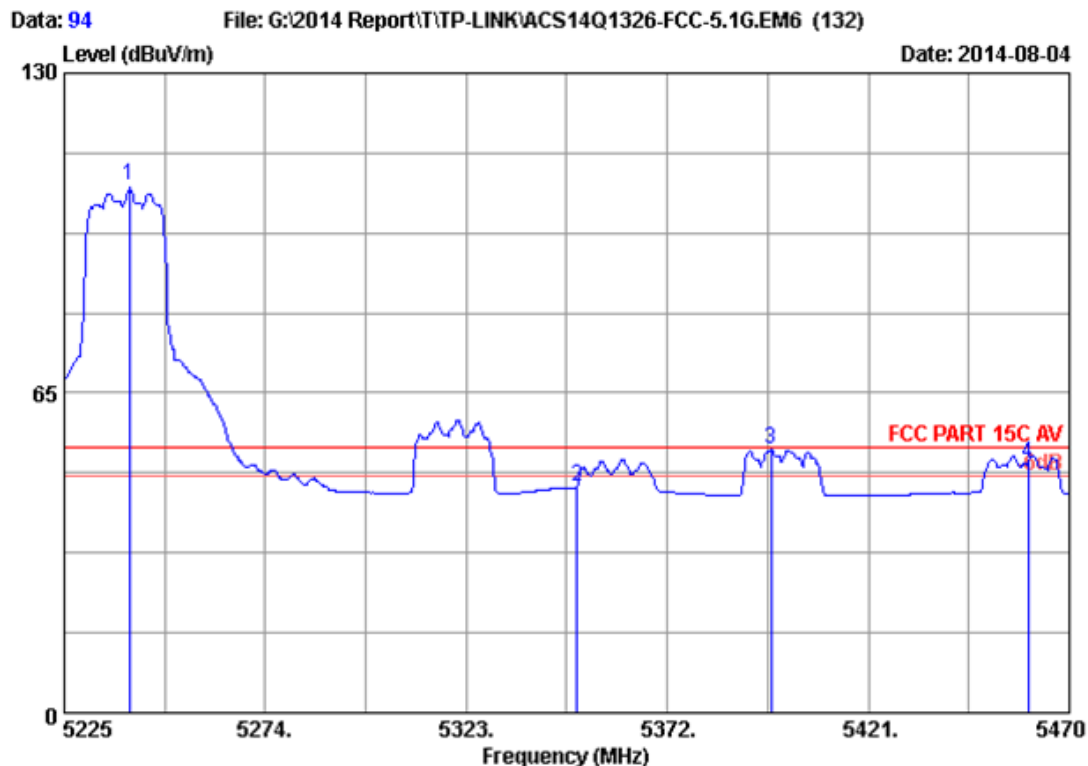

Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT20 CH48 5240MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.925	33.59	9.02	35.70	100.29	107.20	54.00	-53.20	Average
2	5350.000	33.76	9.13	35.70	38.81	46.00	54.00	8.00	Average
3	5397.235	33.84	9.18	35.70	46.12	53.44	54.00	0.56	Average
4	5460.000	33.94	9.25	35.70	43.37	50.86	54.00	3.14	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

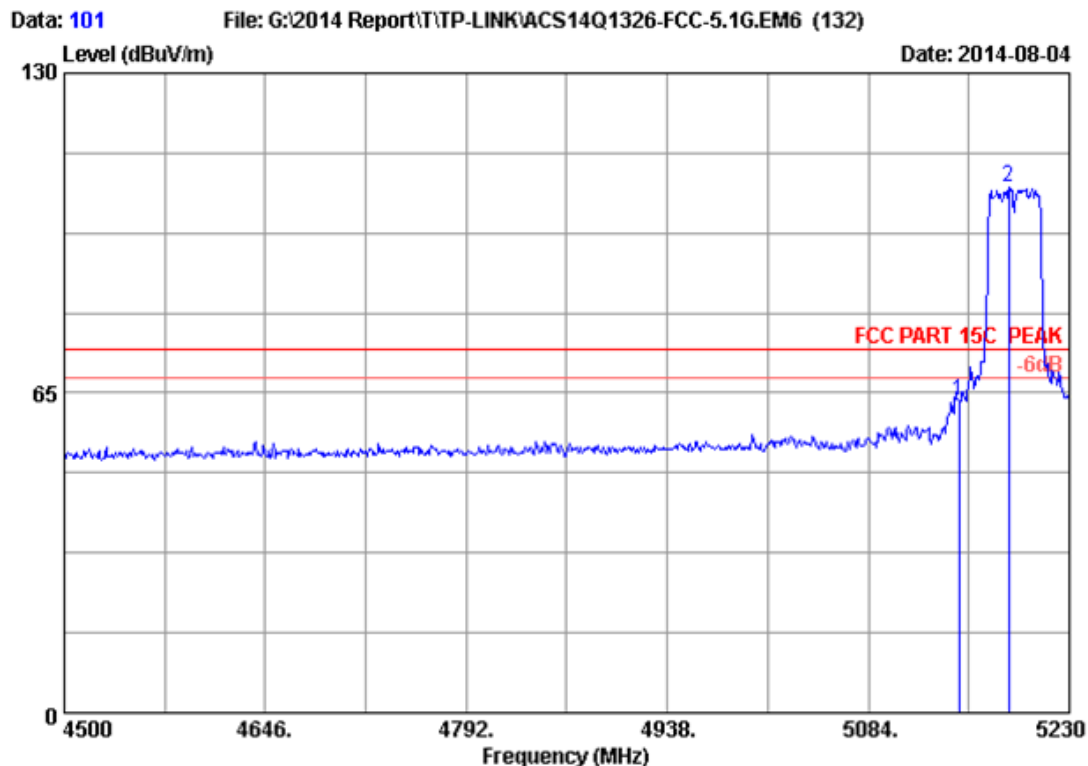

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT40 CH38 5190MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.44	8.92	35.70	56.88	63.54	74.00	10.46	Peak
2	5186.200	33.50	8.96	35.70	100.00	106.76	74.00	-32.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

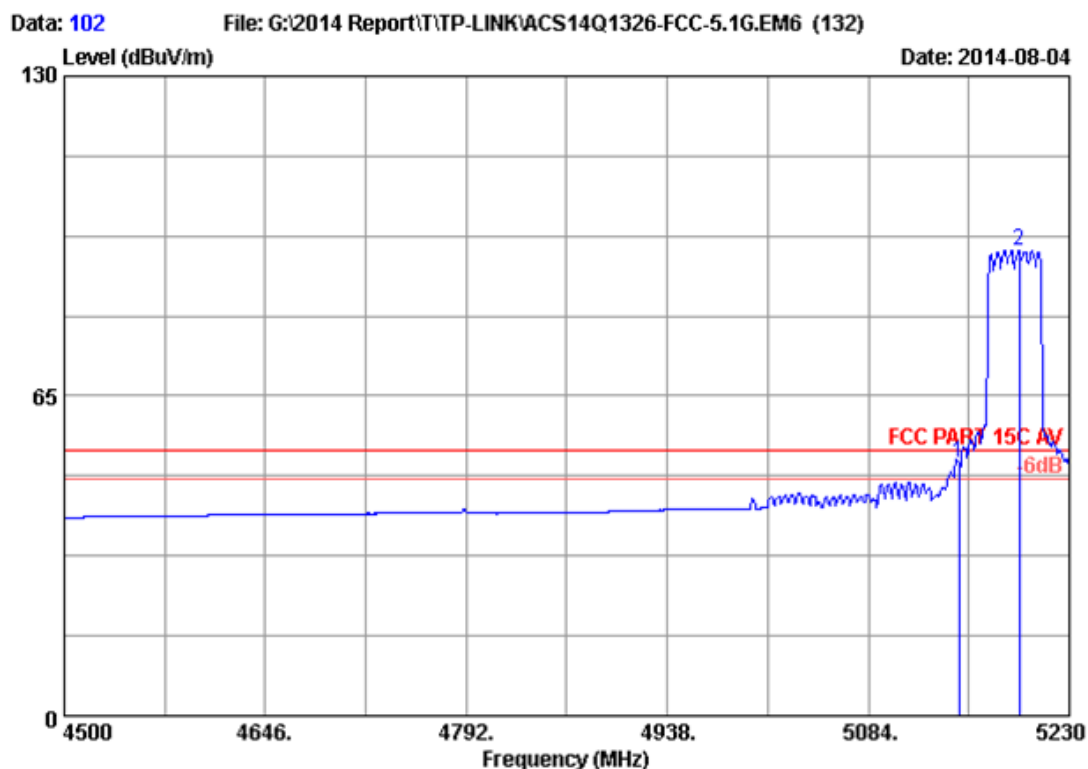

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT40 CH38 5190MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	5150.000	33.44	8.92	35.70	44.89	51.55	54.00	2.45	Average
2	5193.500	33.51	8.97	35.70	87.87	94.65	54.00	-40.65	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

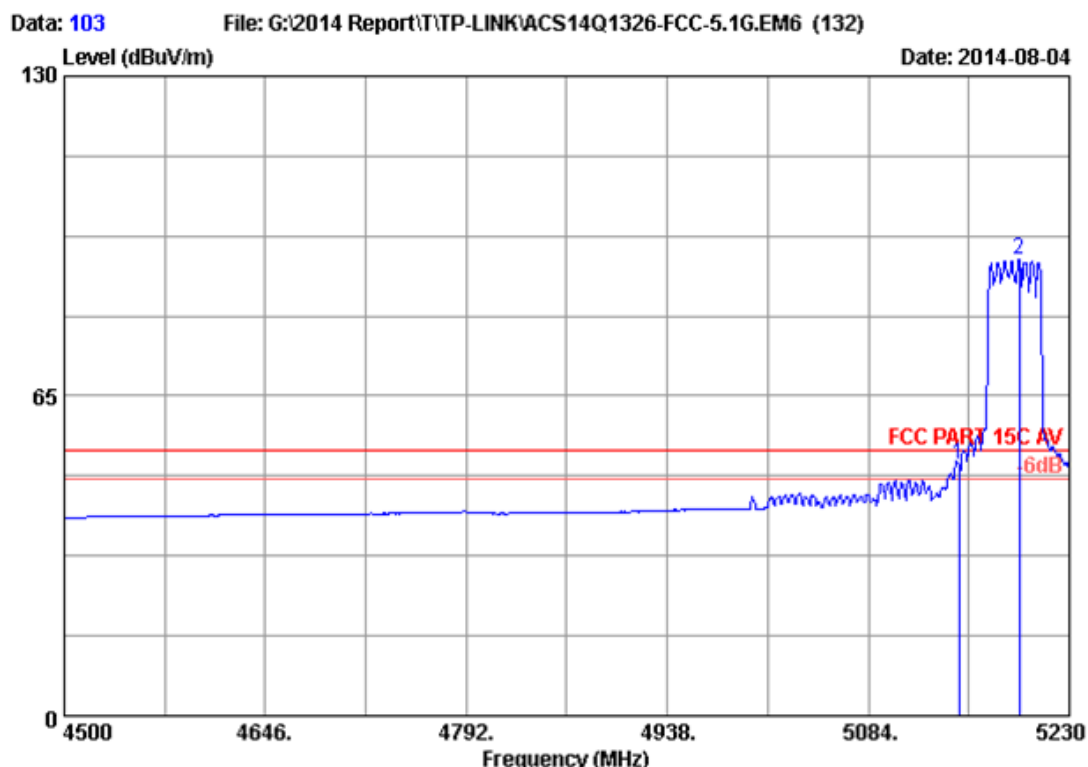

Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT40 CH38 5190MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.44	8.92	35.70	44.36	51.02	54.00	2.98	Average
2	5193.500	33.51	8.97	35.70	85.84	92.62	54.00	-38.62	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

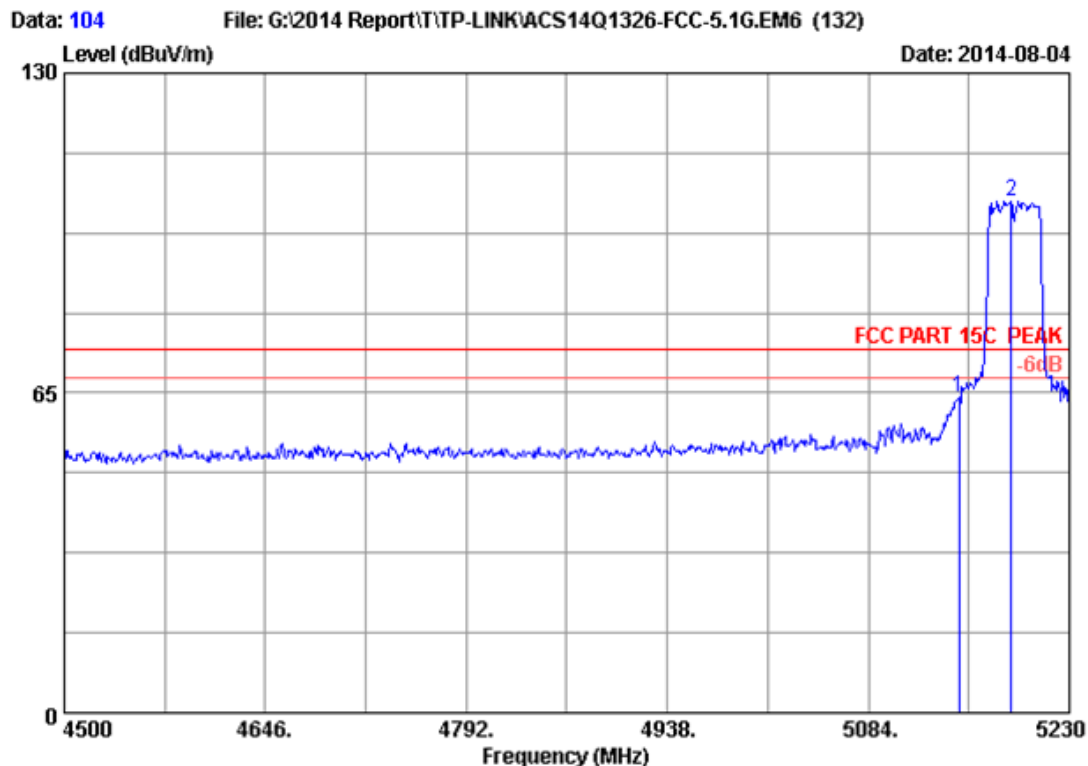

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT40 CH38 5190MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.44	8.92	35.70	57.27	63.93	74.00	10.07	Peak
2	5187.660	33.50	8.96	35.70	97.32	104.08	74.00	-30.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

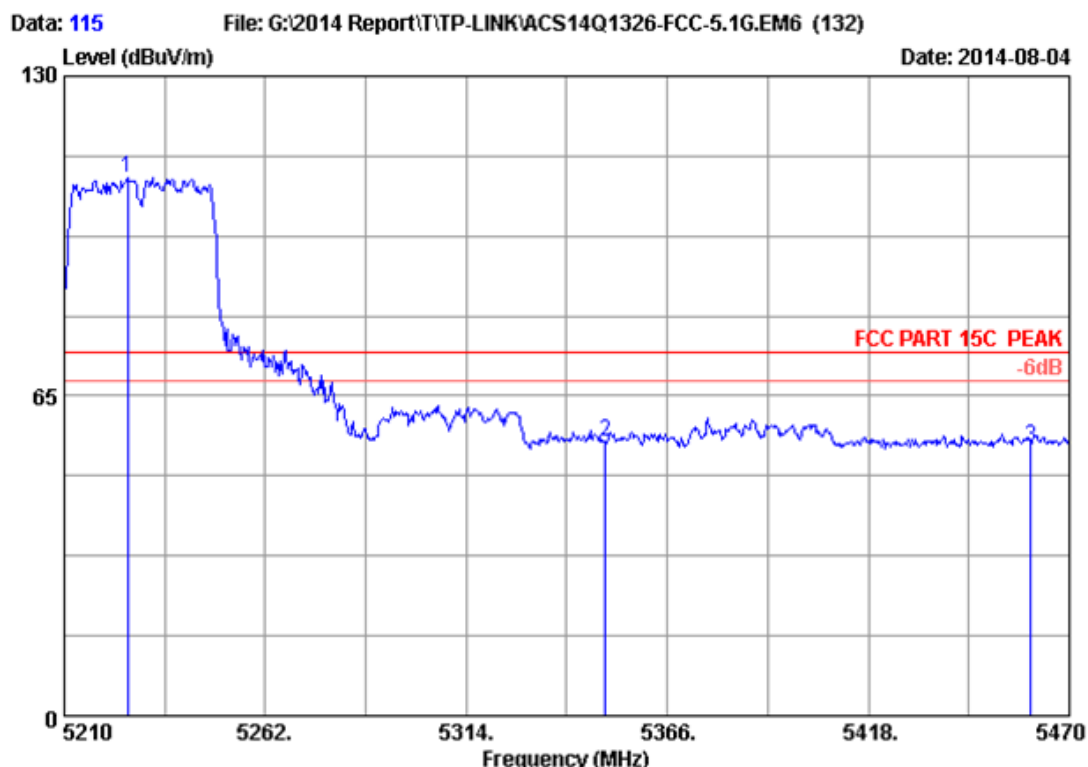

Site no. : 3m Chamber Data no. : 115
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT40 CH46 5230MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5226.380	33.56	9.00	35.70	102.40	109.26	74.00	-35.26	Peak
2	5350.000	33.76	9.13	35.70	48.45	55.64	74.00	18.36	Peak
3	5460.000	33.94	9.25	35.70	47.17	54.66	74.00	19.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

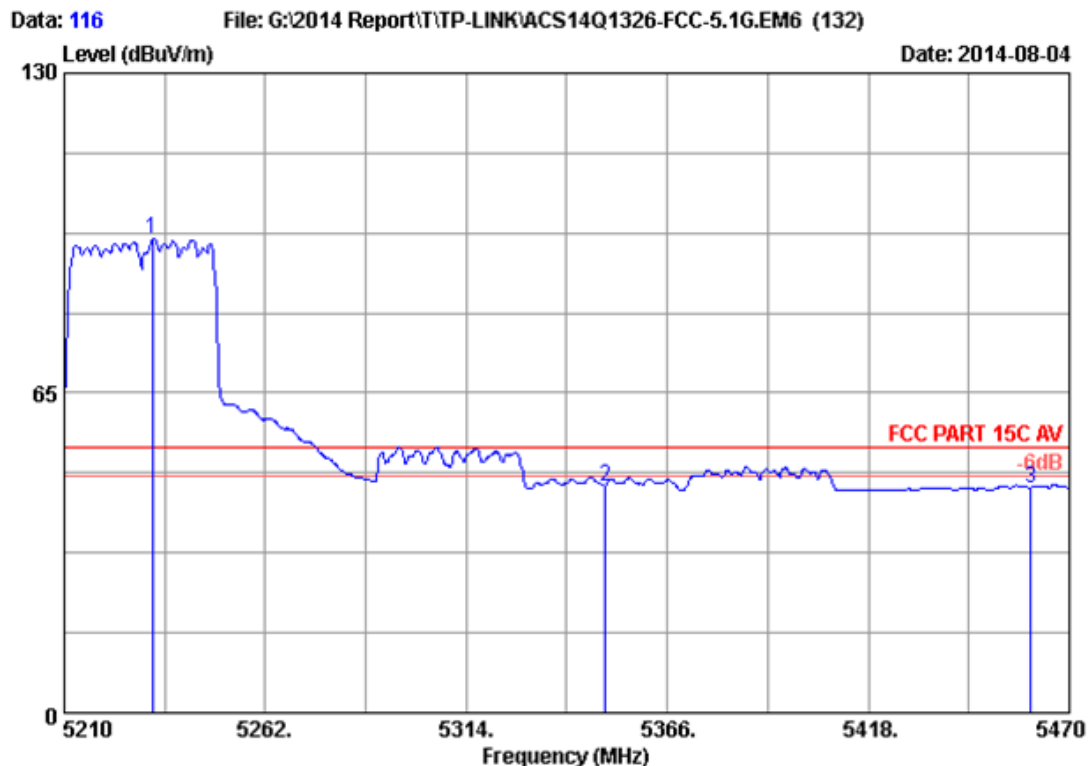

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT40 CH46 5230MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.880	33.57	9.01	35.70	89.38	96.26	54.00	-42.26	Average
2	5350.000	33.76	9.13	35.70	38.91	46.10	54.00	7.90	Average
3	5460.000	33.94	9.25	35.70	38.18	45.67	54.00	8.33	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

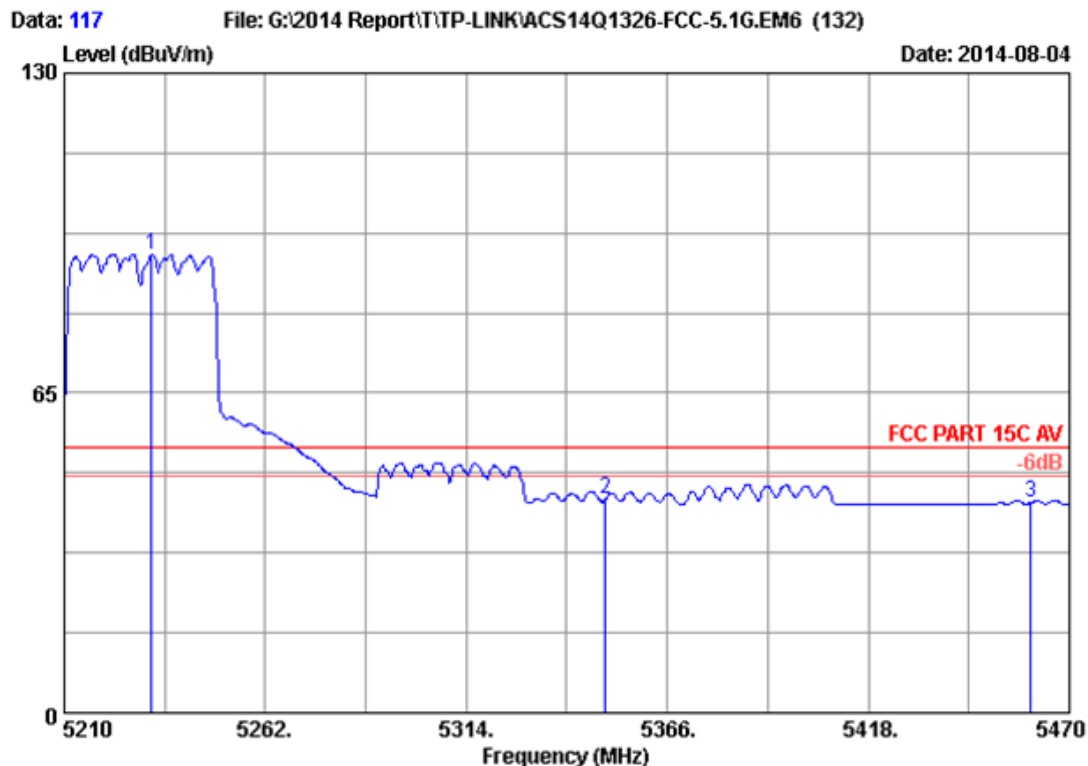

Site no. : 3m Chamber Data no. : 117
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT40 CH46 5230MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.620	33.57	9.01	35.70	86.35	93.23	54.00	-39.23	Average
2	5350.000	33.76	9.13	35.70	36.08	43.27	54.00	10.73	Average
3	5460.000	33.94	9.25	35.70	35.24	42.73	54.00	11.27	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

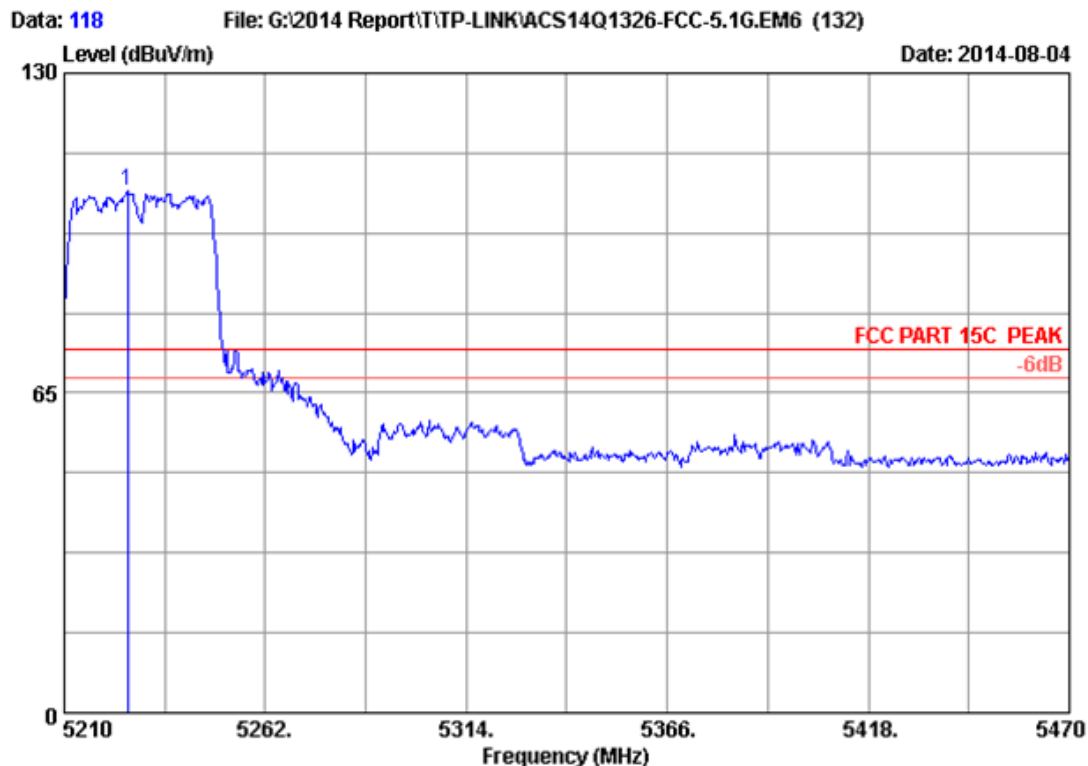

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT40 CH46 5230MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	5226.380	33.56	9.00	35.70	99.15	106.01	74.00	-32.01	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

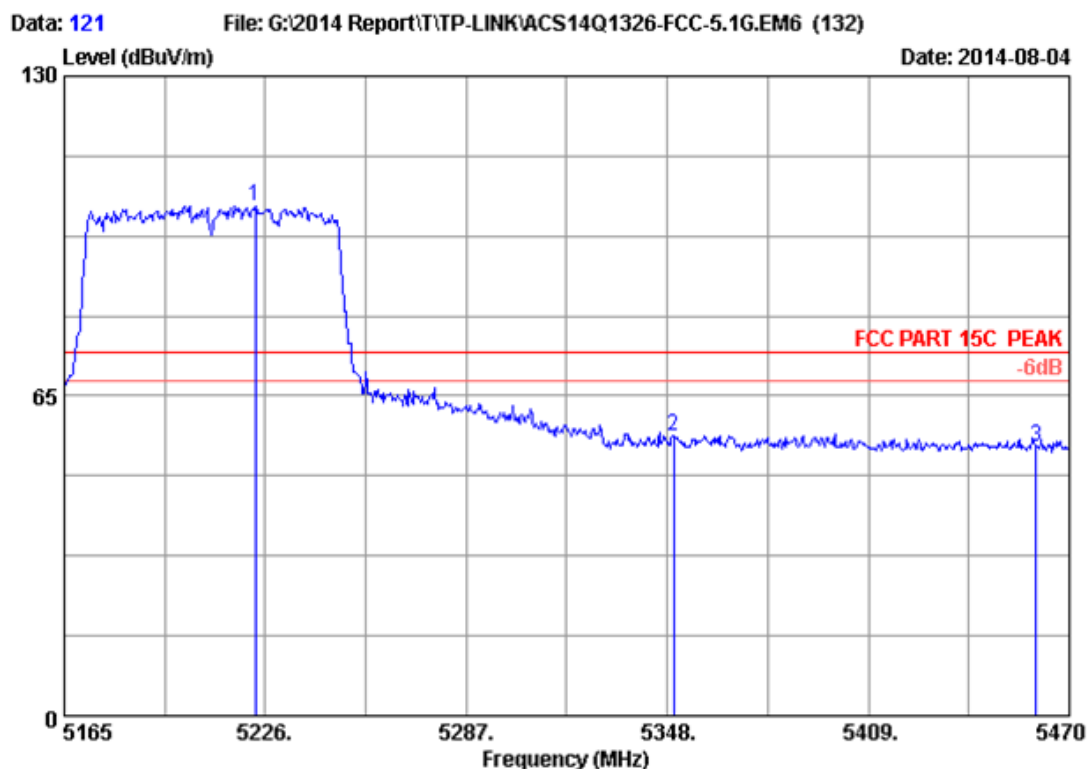

Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT80 CH42 5210MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5222.950	33.56	9.00	35.70	96.68	103.54	74.00	-29.54	Peak
2	5350.000	33.76	9.13	35.70	49.66	56.85	74.00	17.15	Peak
3	5460.000	33.94	9.25	35.70	47.18	54.67	74.00	19.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

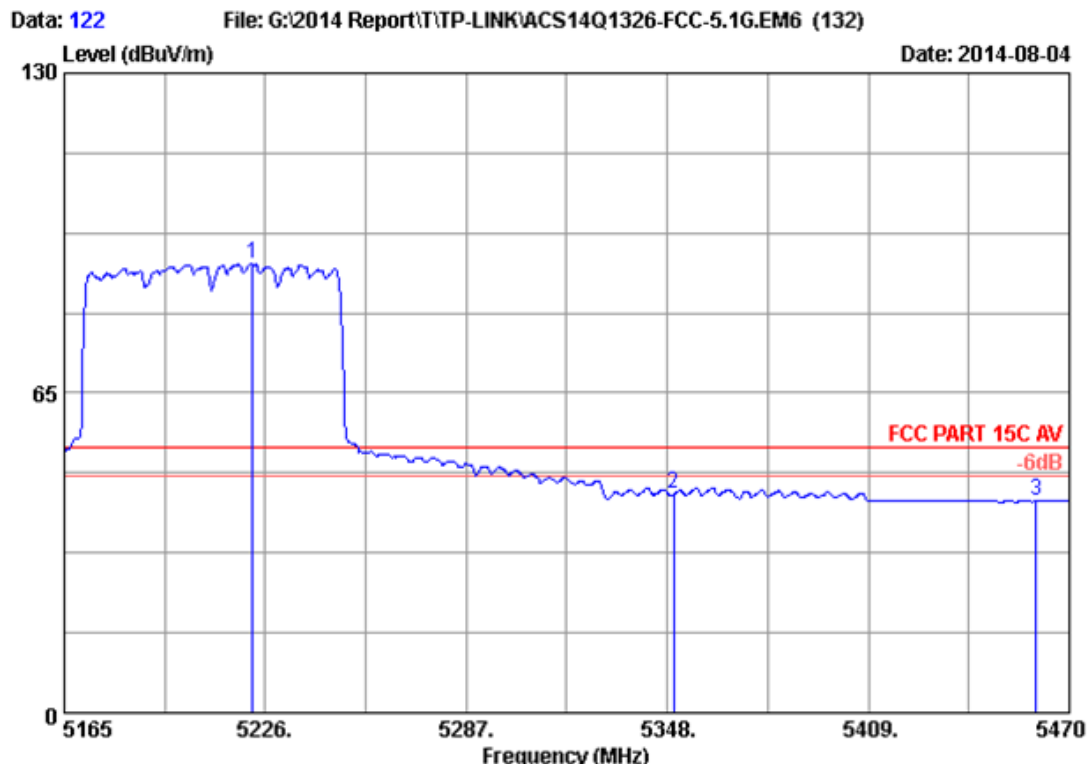

Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT80 CH42 5210MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5222.035	33.56	9.00	35.70	84.32	91.18	54.00	-37.18	Average
2	5350.000	33.76	9.13	35.70	37.23	44.42	54.00	9.58	Average
3	5460.000	33.94	9.25	35.70	35.46	42.95	54.00	11.05	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

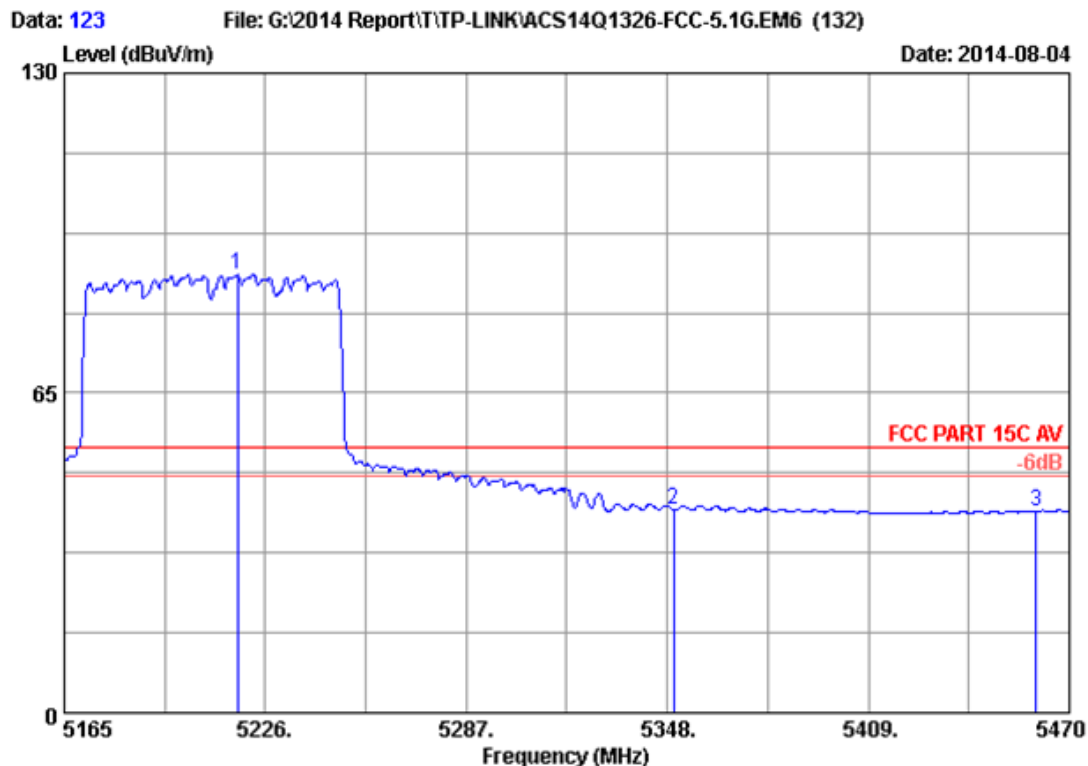

Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT80 CH42 5210MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5217.460	33.55	8.99	35.70	82.24	89.08	54.00	-35.08	Average
2	5350.000	33.76	9.13	35.70	34.09	41.28	54.00	12.72	Average
3	5460.000	33.94	9.25	35.70	33.36	40.85	54.00	13.15	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

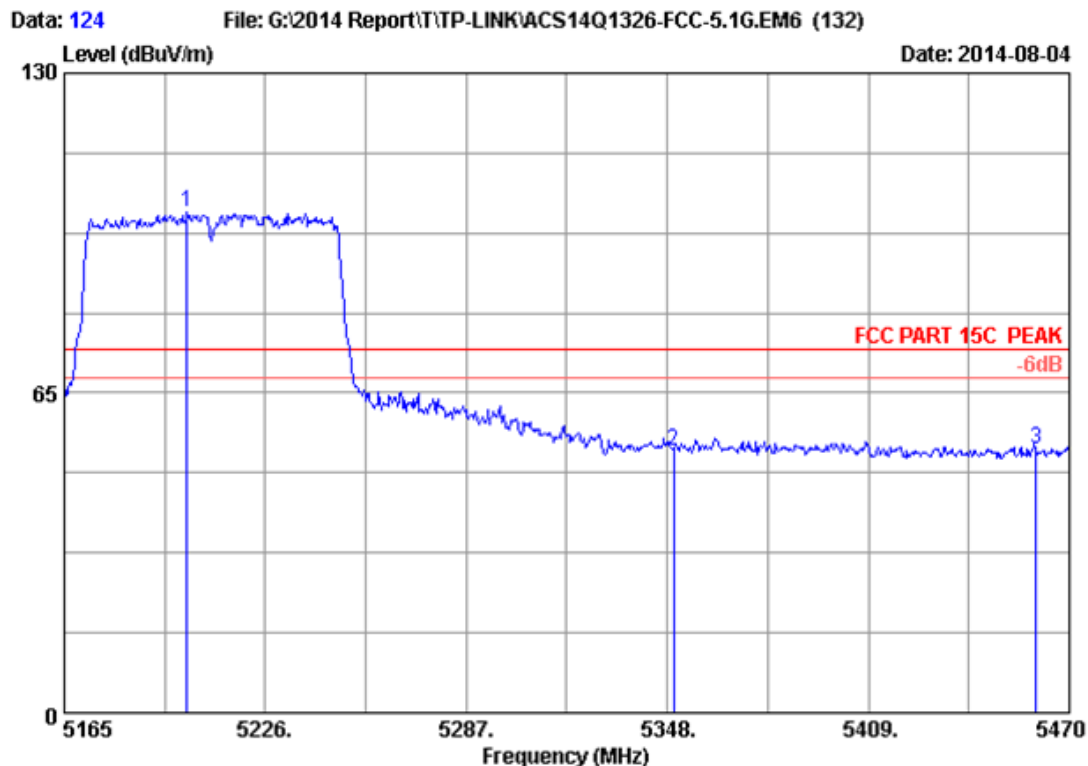

Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT80 CH42 5210MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5202.210	33.52	8.98	35.70	94.89	101.69	74.00	-27.69	Peak
2	5350.000	33.76	9.13	35.70	46.20	53.39	74.00	20.61	Peak
3	5460.000	33.94	9.25	35.70	46.03	53.52	74.00	20.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

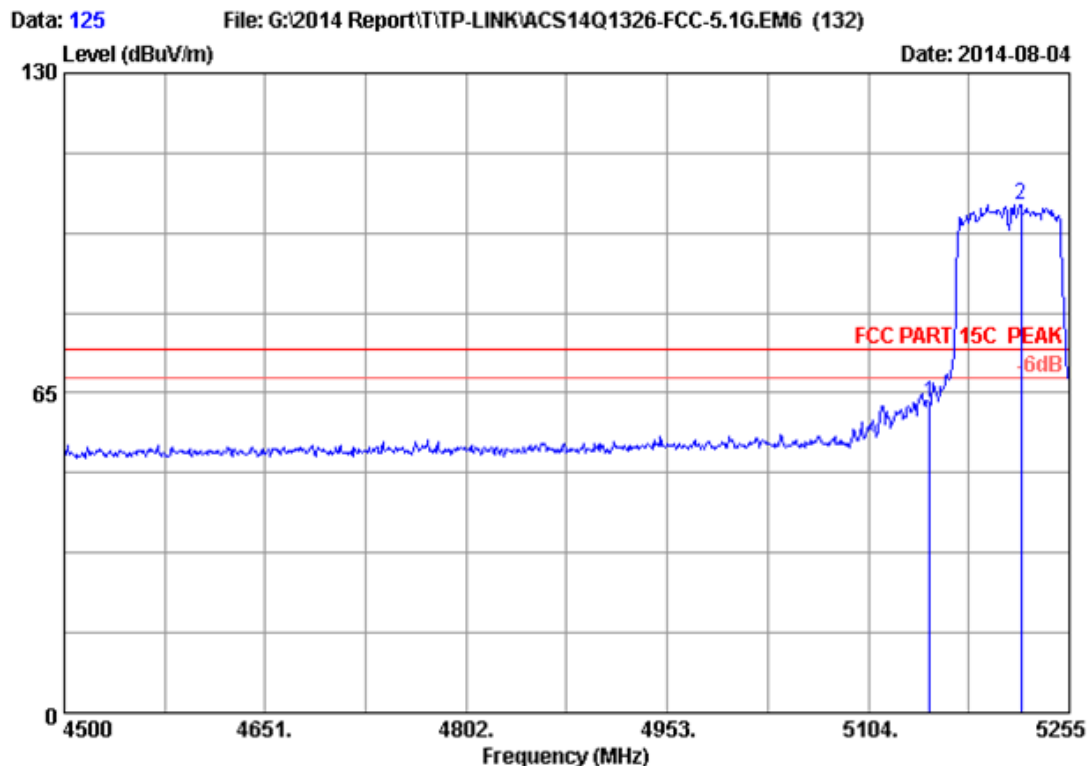

Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT80 CH42 5210MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.44	8.92	35.70	56.21	62.87	74.00	11.13	Peak
2	5218.760	33.55	8.99	35.70	96.41	103.25	74.00	-29.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

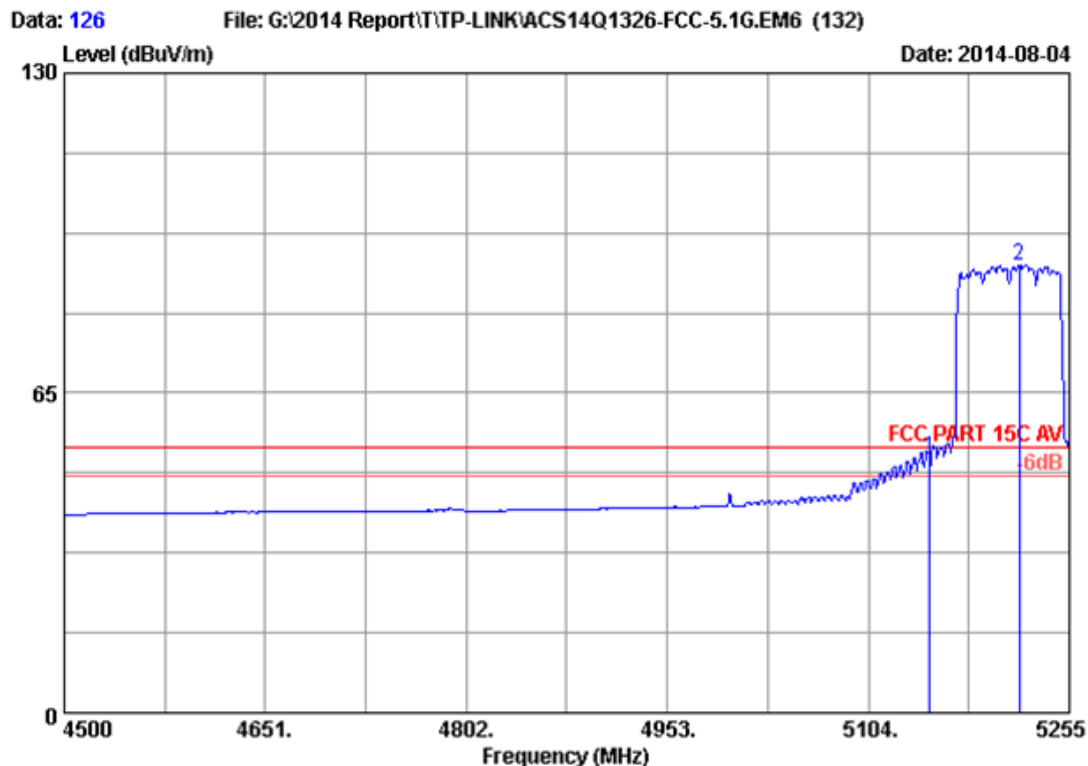

Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT80 CH42 5210MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.44	8.92	35.70	45.01	51.67	54.00	2.33	Average
2	5217.250	33.55	8.99	35.70	84.05	90.89	54.00	-36.89	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

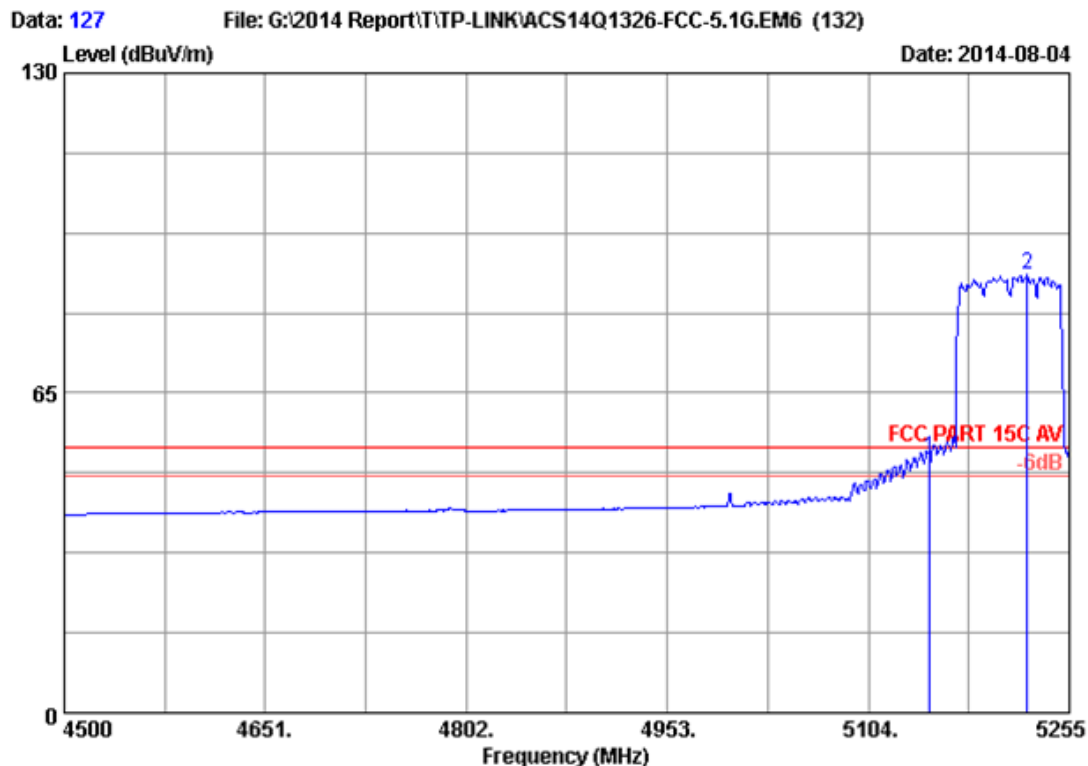

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT80 CH42 5210MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	5150.000	33.44	8.92	35.70	45.30	51.96	54.00	2.04	Average
2	5223.290	33.56	9.00	35.70	82.10	88.96	54.00	-34.96	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

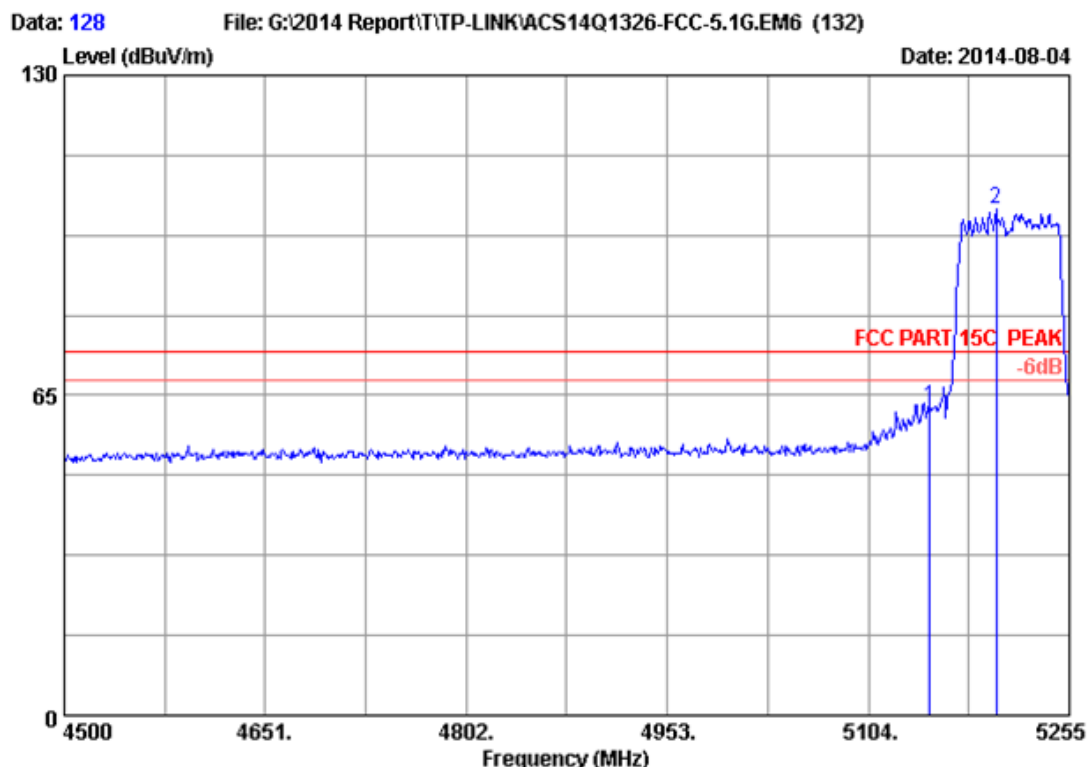

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC1750 Wireless Dual Band DOCSIS 3.0 Cable Modem Router
 Power Rating : DC 12V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11acVHT80 CH42 5210MHz Tx
 M/N : Archer CR700

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.44	8.92	35.70	56.12	62.78	74.00	11.22	Peak
2	5199.885	33.52	8.97	35.70	95.95	102.74	74.00	-28.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.