

FCC Test Report

Equipment : AC1300 Whole Home Wi-Fi System
Brand Name : TP-Link
Model No. : Deco M5
FCC ID : TE7M5
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
Function : ☒ Point-to-multipoint; ☐ Point-to-point
Applicant : TP-Link Technologies Co., Ltd.
Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central
Science and Technology Park,Shennan Rd, Nanshan,
Shenzhen,China
Manufacturer : TP-Link Technologies Co., Ltd.
Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central
Science and Technology Park,Shennan Rd, Nanshan,
Shenzhen,China

The product sample received on Jun. 29, 2016 and completely tested on Jan. 13, 2017. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.


Cliff Chang
SPORTON INTERNATIONAL INC.





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Testing Applied Standards	7
1.3	Testing Location Information	7
1.4	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	Test Channel Mode	9
2.2	The Worst Case Measurement Configuration.....	10
2.3	EUT Operation during Test	12
2.4	Accessories	13
2.5	Support Equipment.....	13
2.6	Test Setup Diagram	15
3	TRANSMITTER TEST RESULT	19
3.1	AC Power-line Conducted Emissions	19
3.2	DTS Bandwidth.....	21
3.3	Maximum Conducted Output Power	22
3.4	Power Spectral Density	24
3.5	Emissions in Non-restricted Frequency Bands	26
3.6	Emissions in Restricted Frequency Bands.....	27
4	TEST EQUIPMENT AND CALIBRATION DATA	31
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS		
APPENDIX B. TEST RESULTS OF DTS BANDWIDTH		
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER		
APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY		
APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS		
APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS		
APPENDIX G. TEST RESULTS OF RADIATED EMISSION CO-LOCATION		
APPENDIX H. TEST PHOTOS		
PHOTOGRAPHS OF EUT V01		

Summary of Test Result

Conformance Test Specifications				
Report Clause	Ref. Std. Clause	Description	Limit	Result
1.1.2	15.203	Antenna Requirement	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	FCC 15.207	Complied
3.2	15.247(a)	DTS Bandwidth	≥500kHz	Complied
3.3	15.247(b)	Maximum Conducted Output Power	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	Non-Restricted Bands: > 30 dBc	Complied
3.6	15.247(d)	Emissions in Restricted Frequency Bands	Restricted Bands: FCC 15.209	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-3273456
FAX : 886-3-3270973
FCC ID: TE7M5

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), ac (VHT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), ac (VHT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4G	11b	20	2
2.4G	11g	20	2
2.4G	HT20	20	2
2.4G	HT20,BF	20	2
2.4G	VHT20	20	2
2.4G	VHT20,BF	20	2
2.4G	HT40	40	2
2.4G	HT40,BF	40	2
2.4G	VHT40	40	2
2.4G	VHT40,BF	40	2

Note:

- ♦ 2.4G is the 2.4GHz Band (2.4-2.4835GHz).
- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)			
					WLAN 2.4G	WLAN 5G B1	WLAN 5G B4	Bluetooth
1	TP-LINK	3101501201	Omni-Directional Antenna	I-PEX	1.30	-	-	-
2	TP-LINK	3101501201	Omni-Directional Antenna	I-PEX	1.30	-	-	-
3	TP-LINK	5G2-M5	Omni-Directional Antenna	N/A	-	0.64	0.88	-
4	TP-LINK	5G2-M5	Omni-Directional Antenna	N/A	-	0.64	0.88	-
5	TP-LINK	Bluetooth-M5	Omni-Directional Antenna	N/A	-	-	-	1.40

Note:

Ant. 1~Ant. 2 connect to port1~port 2 for 2.4GHz.

Ant. 3~Ant. 4 connect to port1~port 2 for 5GHz.

Ant. 5 connect to port1 for bluetooth.

For 2.4GHz IEEE 802.11b/g/n/ac mode (2TX/2RX):

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

For 5GHz IEEE 802.11n/a/ac mode (2TX/2RX):

Ant. 3 and Ant. 4 could transmit/receive simultaneously.

For bluetooth mode (1TX/1RX):

Only Ant. 5 could transmit/receive.

1.1.3 Mode Test Duty Cycle

Mode	DC
11b	0.993
11g	0.961
VHT20	0.984
VHT20,BF	0.815
VHT40	0.96
VHT40,BF	0.922

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter		
Beamforming Function	☒ With beamforming for 802.11n/ac	☐ Without beamforming	

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 558074 D01 v03r05
- ◆ FCC KDB 662911 D01 v02r01
- ◆ FCC KDB 644545 D01 v01r02
- ◆ FCC KDB 412172 D01 v01r01

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-318-0055
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Gino Huang & Gary Chu	22°C / 5 5%	Nov. 19, 2016 ~ Jan. 13, 2017
Radiated	03CH01-CB	Poul Chen & Mason Chen & Welson Chen & Steven Liang & Zero Chen	22°C / 54%	Nov. 15, 2016 ~ Dec. 13, 2016
AC Conduction	CO01-CB	GN Hou & Ryo Fan	23°C / 60%	Dec. 01, 2016

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Band	Mode	BWch (MHz)	Nss-Min	Nant	Ch. (MHz)	Range	Power Setting
2.4G	11b	20	1	2	2412	L	22.5
2.4G	11b	20	1	2	2437	M	22.5
2.4G	11b	20	1	2	2462	H	22.5
2.4G	11g	20	1	2	2412	L	18.5
2.4G	11g	20	1	2	2437	M	23.5
2.4G	11g	20	1	2	2462	H	18.5
2.4G	VHT20	20	1,(M0)	2	2412	L	18
2.4G	VHT20	20	1,(M0)	2	2437	M	23.5
2.4G	VHT20	20	1,(M0)	2	2462	H	18
2.4G	VHT40	40	1,(M0)	2	2422	L	17
2.4G	VHT40	40	1,(M0)	2	2437	M	18.5
2.4G	VHT40	40	1,(M0)	2	2452	H	16.5
2.4G	VHT20,BF	20	1,(M0)	2	2412	L	20
2.4G	VHT20,BF	20	1,(M0)	2	2437	M	26
2.4G	VHT20,BF	20	1,(M0)	2	2462	H	21
2.4G	VHT40,BF	40	1,(M0)	2	2422	L	20
2.4G	VHT40,BF	40	1,(M0)	2	2437	M	22
2.4G	VHT40,BF	40	1,(M0)	2	2452	H	20

Note:

- ♦ Test range channel consist of L (Low Ch.), M (Middle Ch.), H (High Ch.), S (Single Ch.) and C (Straddle Band Ch.).
- ♦ VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	Repeater Mode with AP_2.4GHz
2	Repeater Mode with AP_5GHz
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	Repeater Mode with AP_2.4GHz
2	Repeater Mode with AP_5GHz
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
1	EUT in Z axis_Repeater Mode with AP



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	WLAN 2.4GHz + Bluetooth
2	WLAN 5GHz + Bluetooth
For operating mode 2 is the worst case and it was record in this test report. Refer to Sporton Test Report No.: FA672842 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	

Note1: The EUT only uses in Z axis.

Note2: The EUT supports both AP and Repeater mode. Repeater mode selected as representative mode because it is equipped with the most complicated functions.

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under LanTest20.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Wireless AP and transmit duty cycle no less 98%.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Equipment Name	Brand Holder	Model Name	Rating
Adapter	TP-Link Technologies Co., Ltd.	T120120-2B4	INPUT: 100-240V~50/60Hz 0.4A OUTPUT: 5V-1.2A, 12V-1.2A

2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*5	DELL	E6430	DoC
2	Device	TP-Link	Deco M5	TE7M5
3	iPad	Apple	A1430	DoC

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*5	DELL	E4300	DoC
2	AP Router	Planex	GW-AP54SGX	N/A
3	iPad	Apple	A1430	N/A

For Test Site No: 03CH01-CB (above 1GHz)
non-beamforming mode

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	Test Fixture	TP-Link	ZLR113590	N/A

beamforming mode


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*2	DELL	E4300	DoC
2	Test Fixture	TP-Link	ZLR113590	N/A
3	RX Device	TP-Link	Deco M5	TE7M5




For Test Site No: TH01-CB


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	Test Fixture	TP-Link	ZLR113590	N/A

2.6 Test Setup Diagram

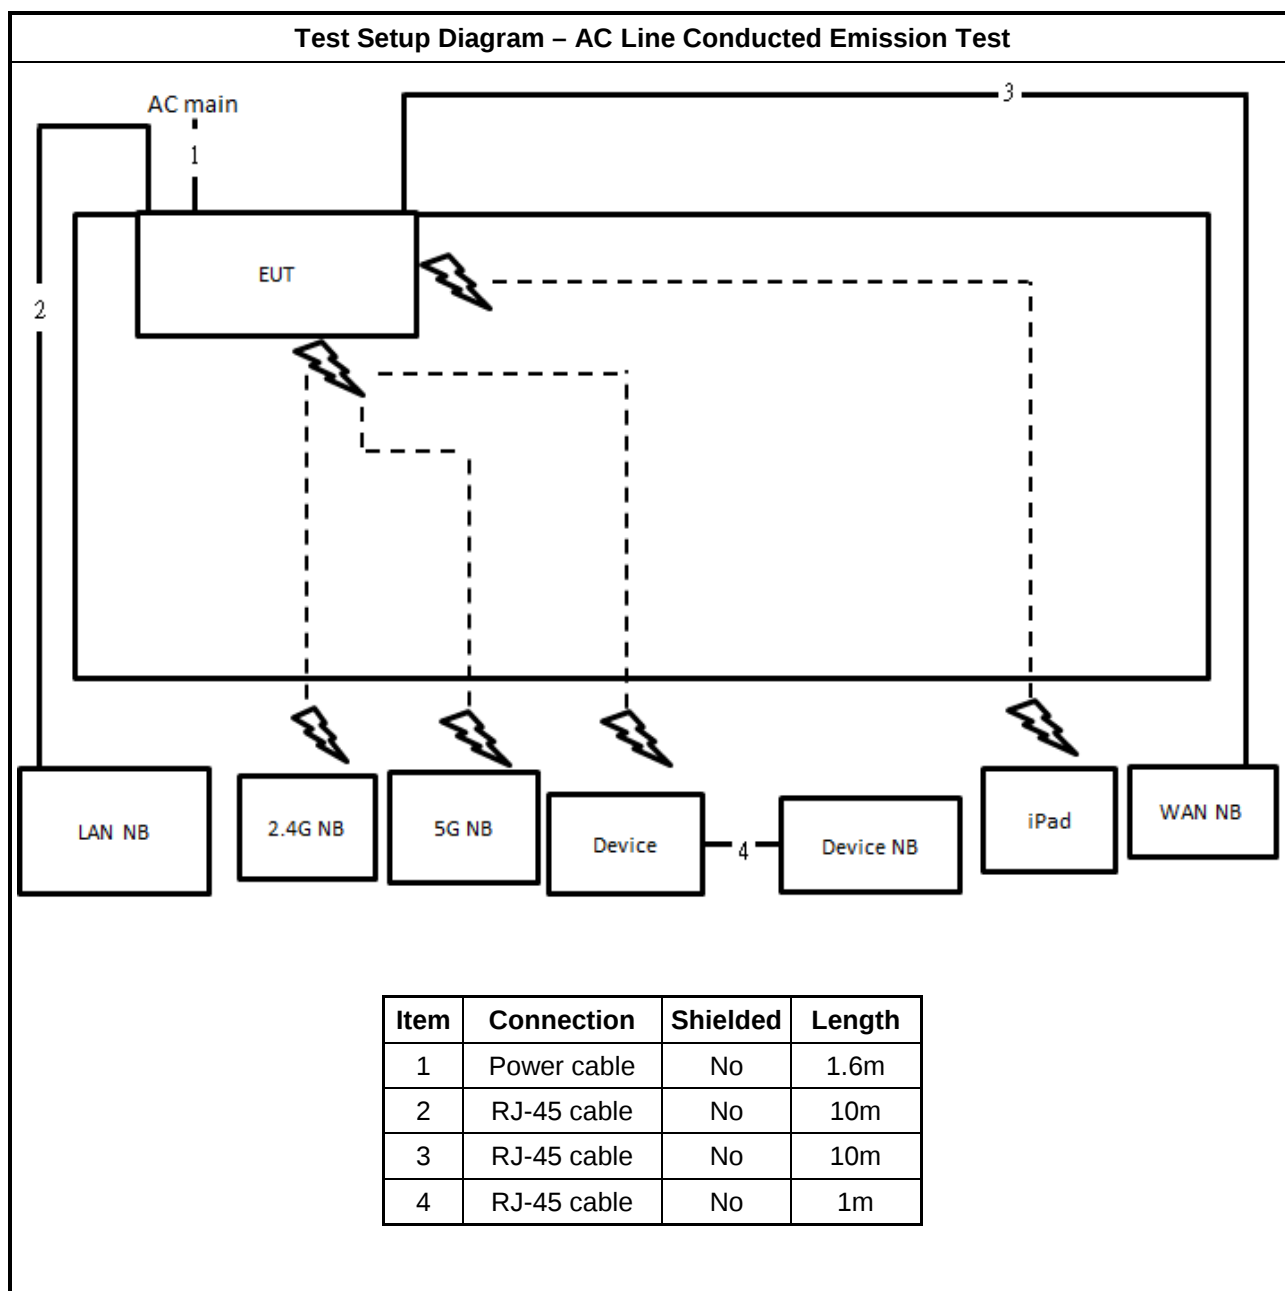


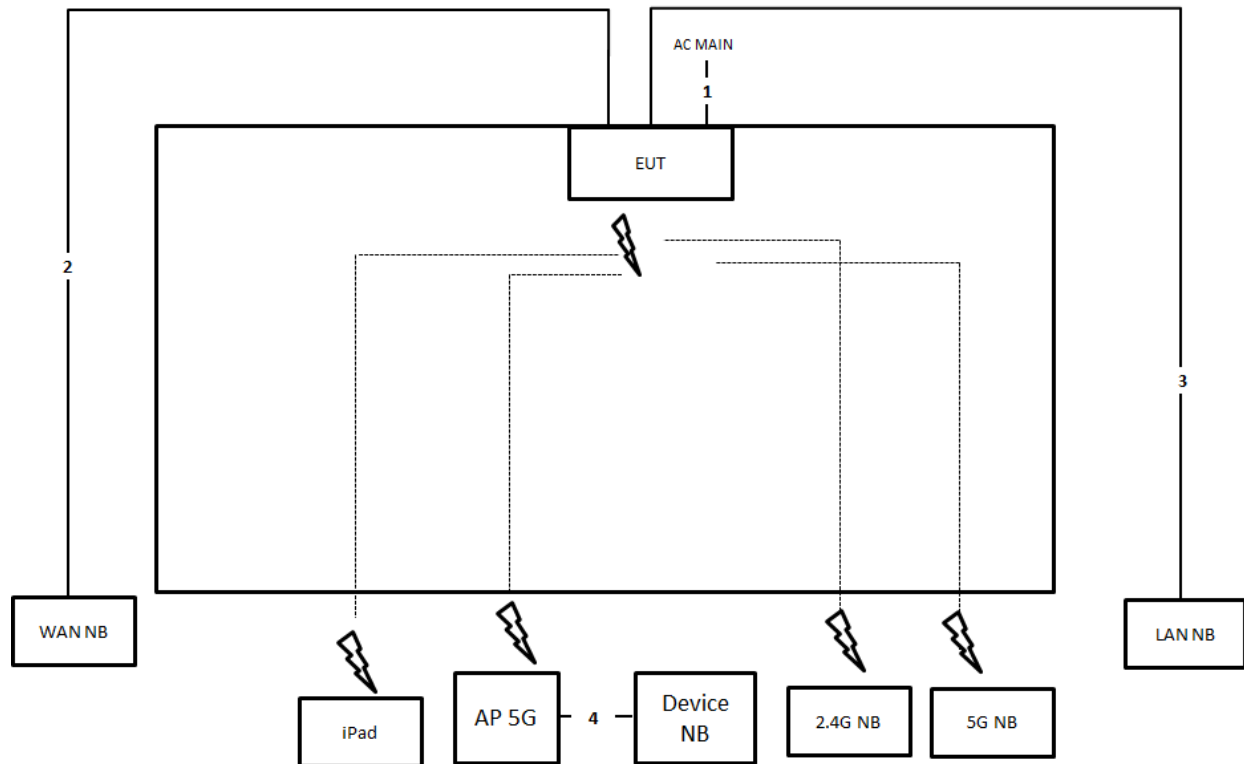Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.6m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m

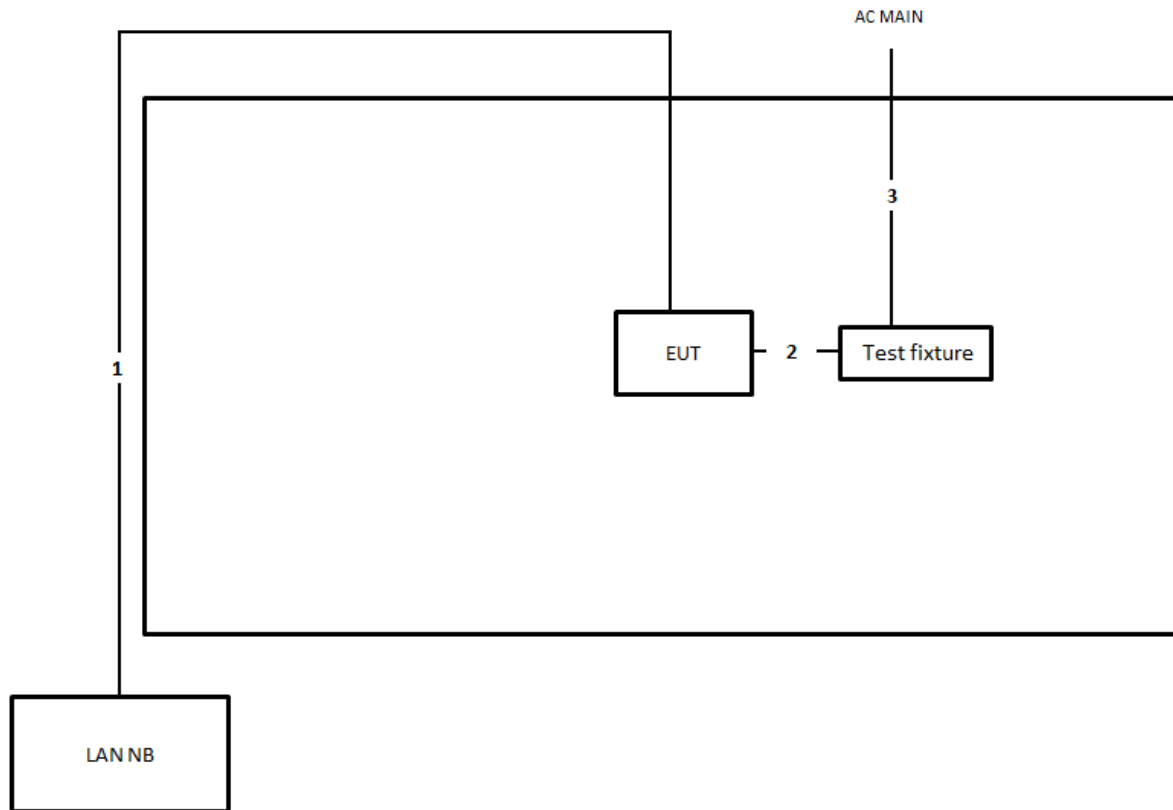Test Setup Diagram - Radiated Test > 1GHz / non-beamforming mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	USB cable	Yes	0.15m
3	Power cable	No	1.6m

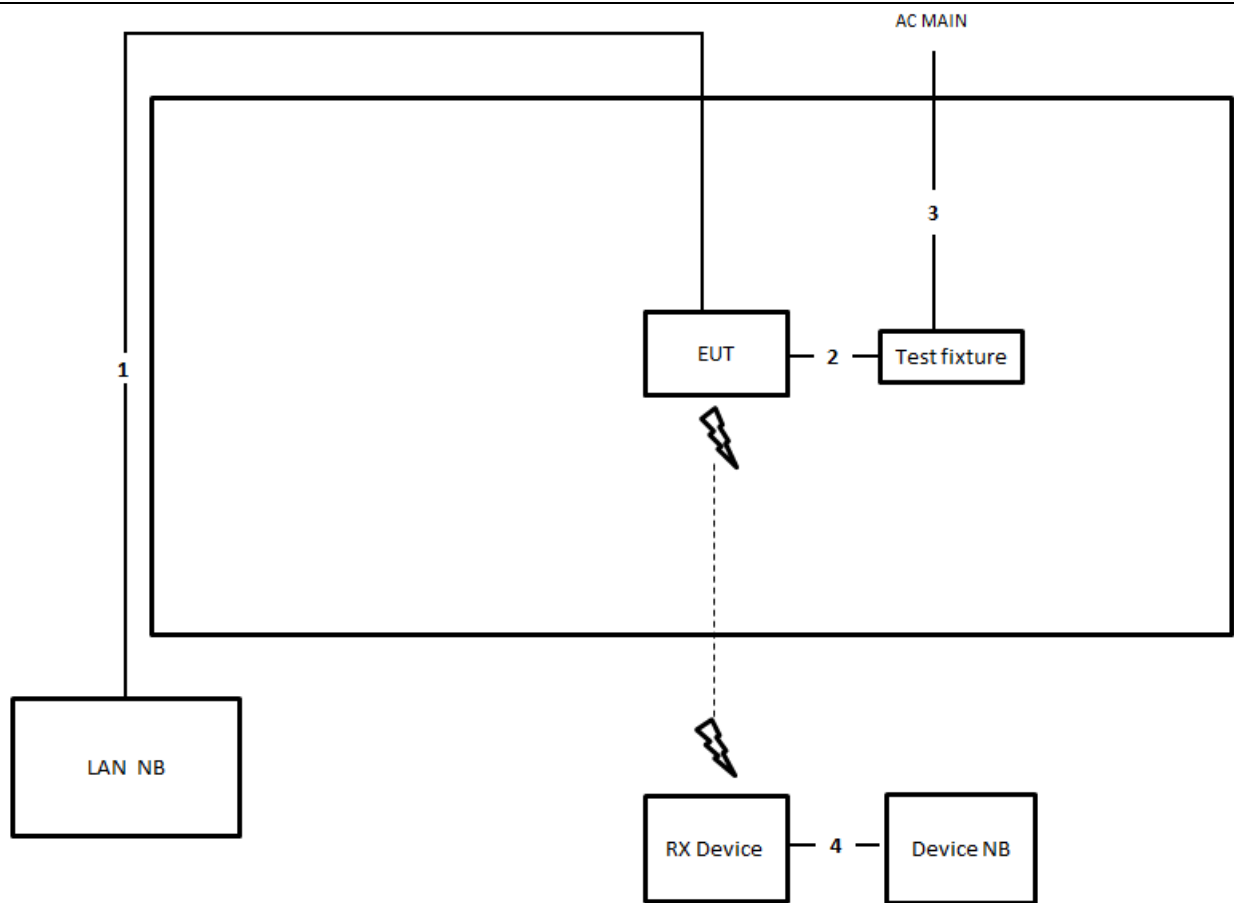Test Setup Diagram - Radiated Test > 1GHz / beamforming mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	USB cable	Yes	0.15m
3	Power cable	No	1.6m
4	RJ-45 cable	No	10m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

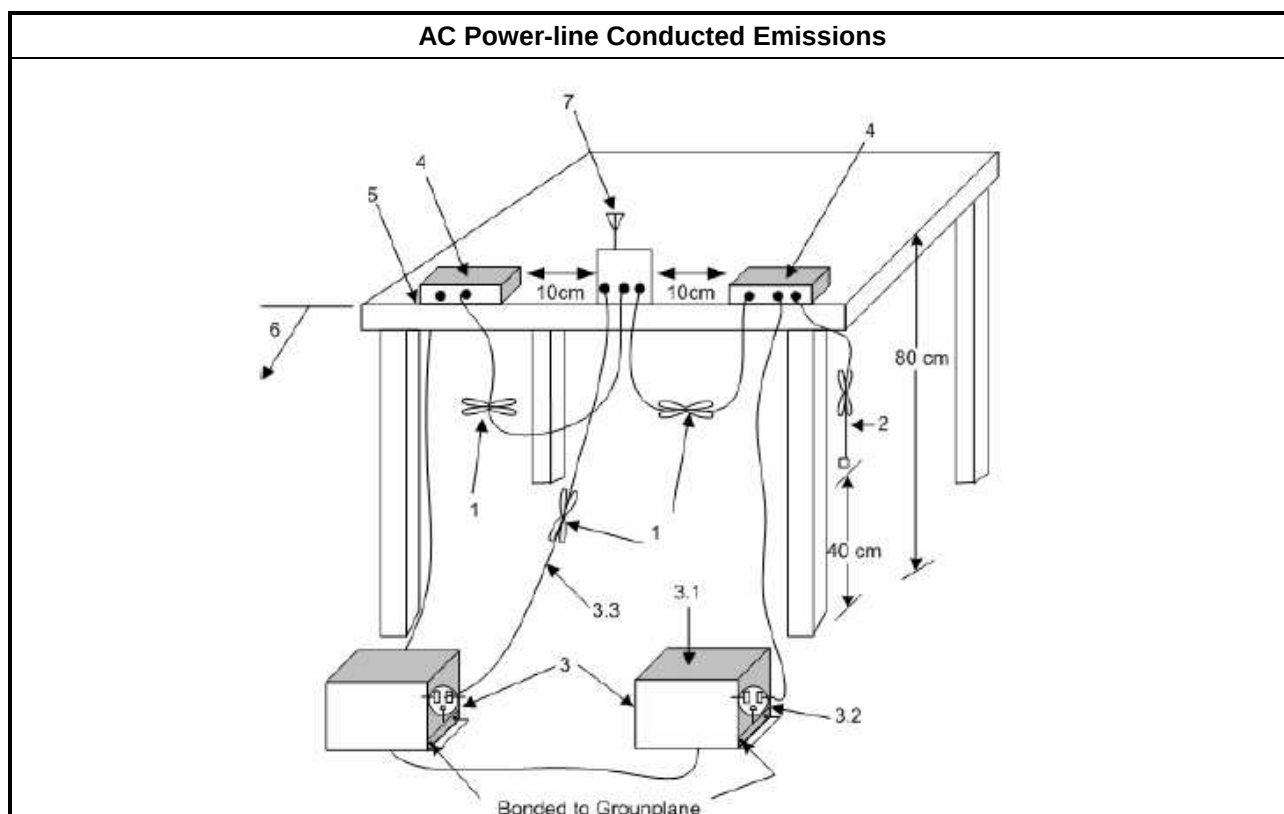



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

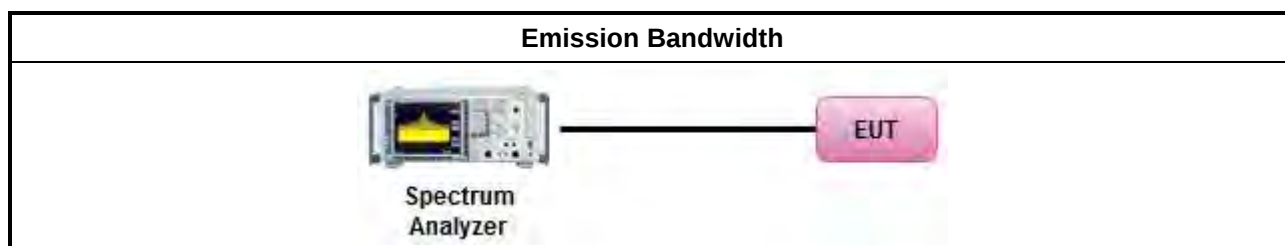

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (peak power meter for VBW ≥ DTS BW)
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
RF power meter and average over on/off periods with duty factor or gated trigger	
☒	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM-G (using an RF average power meter).
☐	Refer as FCC KDB 558074, clause 9.1.2 PKPM1 Peak power meter method.
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

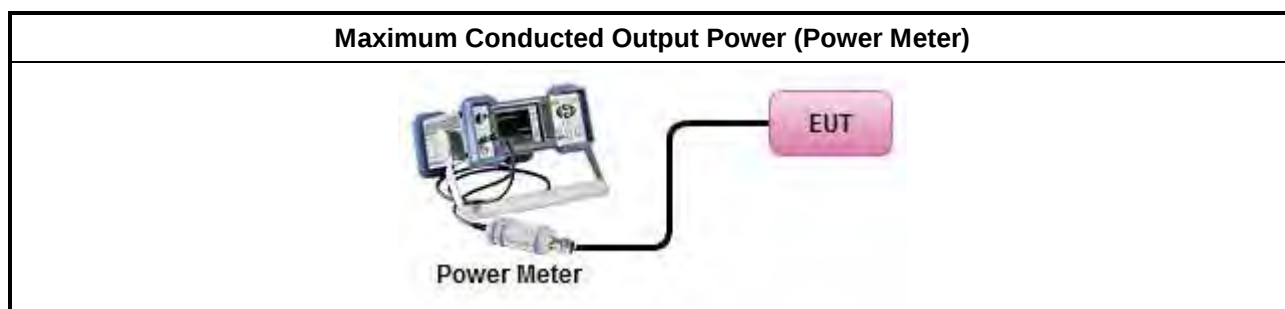

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) $\leq$ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak). [duty cycle $\geq$ 98% or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-2 (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-1 Alt (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

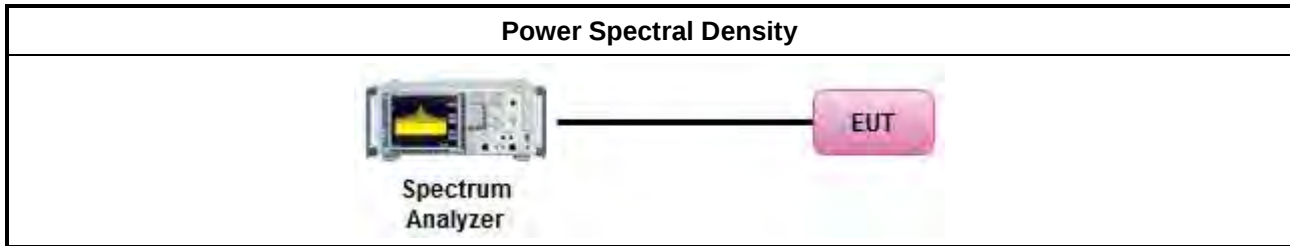

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

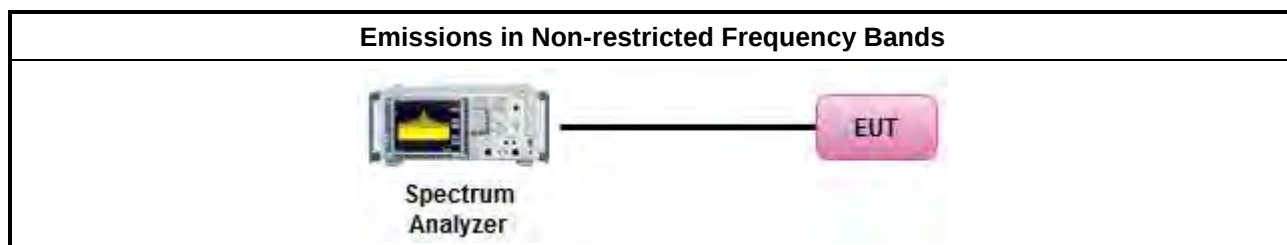

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.9.2.2 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
	☐ Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 13.2 (ANSI C63.10, clause 6.9.3) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.	
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

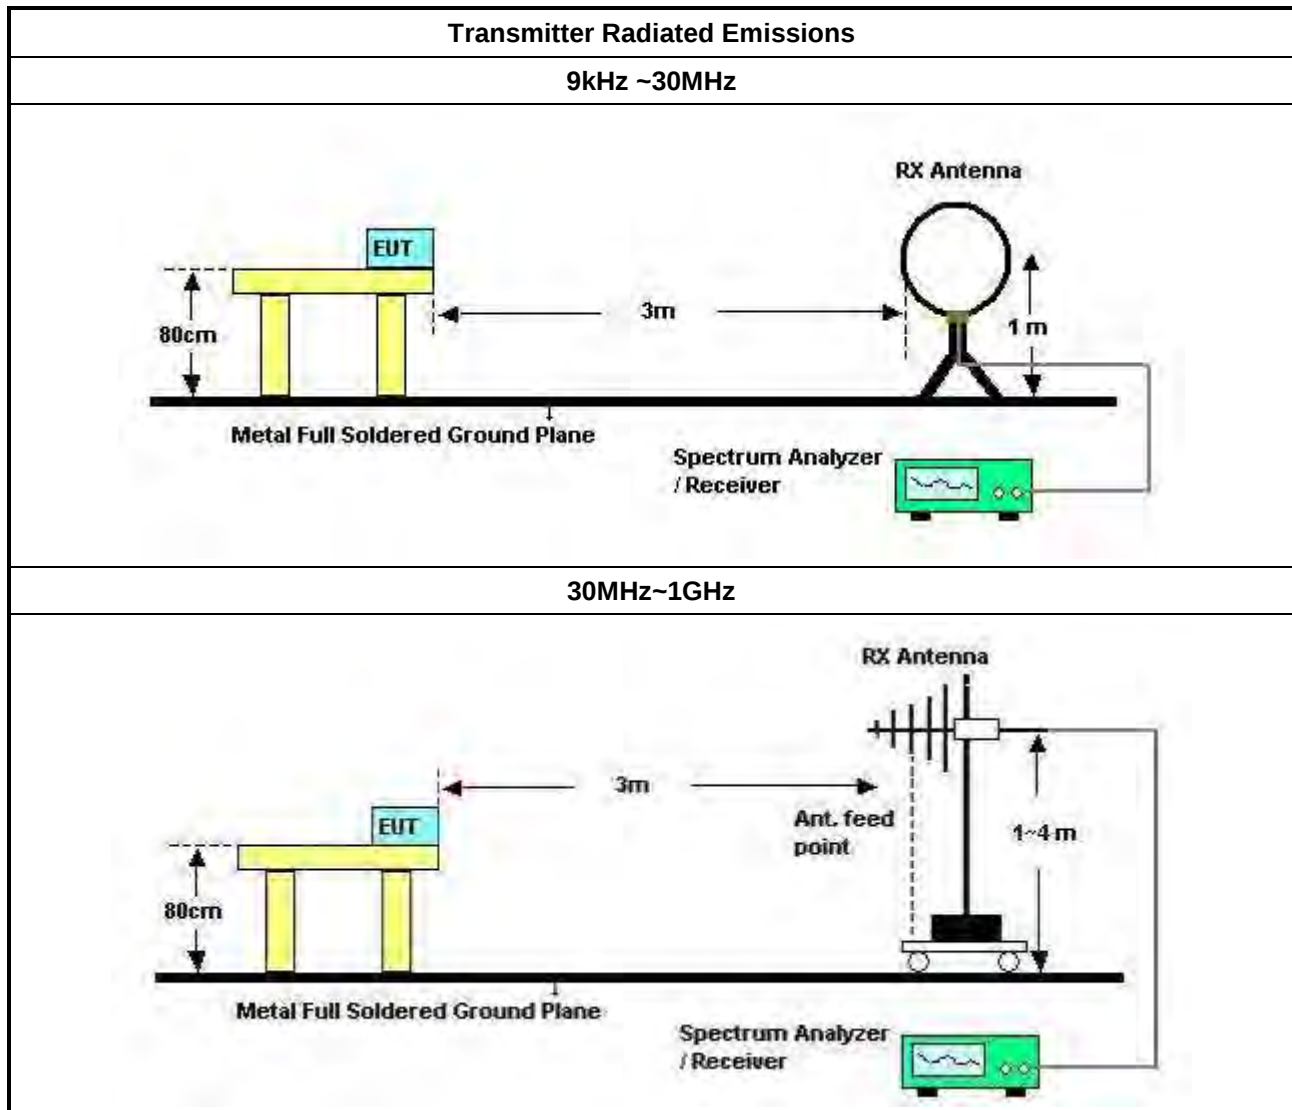

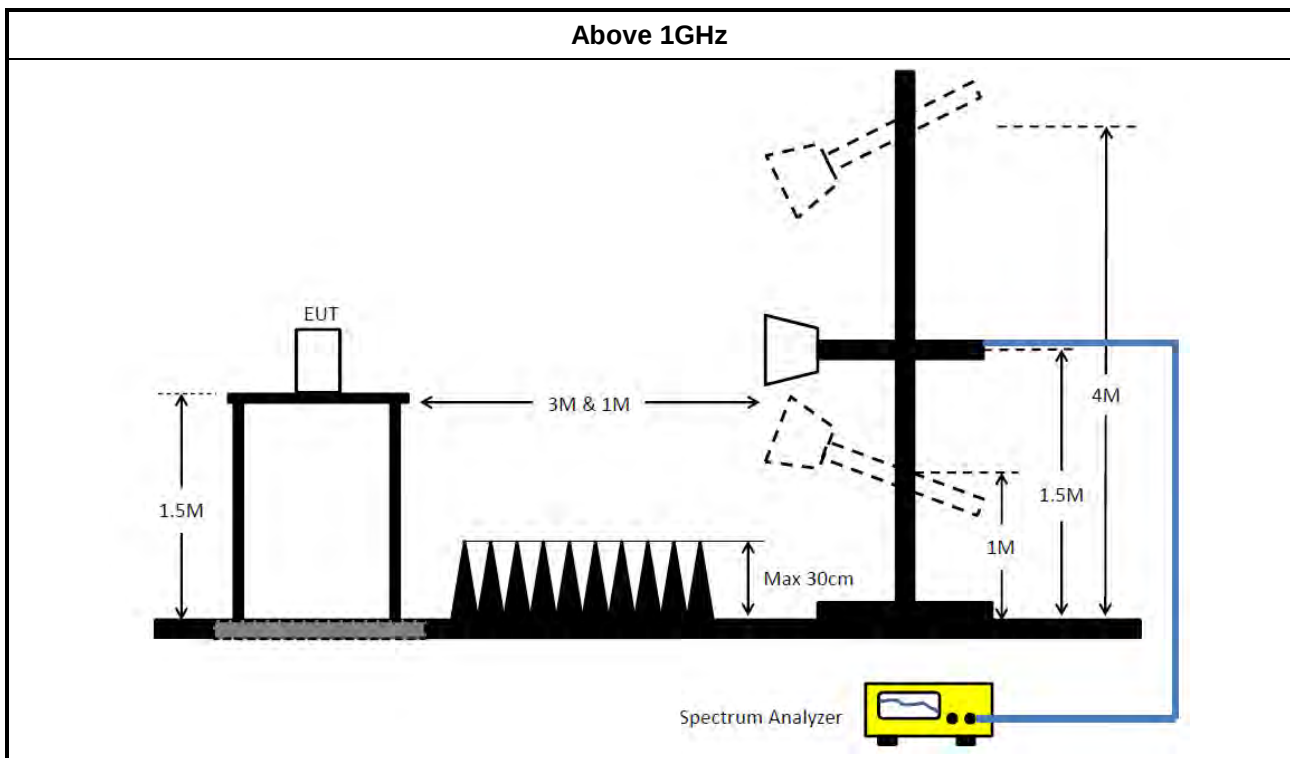

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Test Result of Transmitter Radiated Unwanted Emissions

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMC	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jun. 28, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP-40	100019	9kHz ~ 40GHz	Apr. 21, 2016	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 26, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 09, 2016	Conducted (TH01-CB)


Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Normal Link		

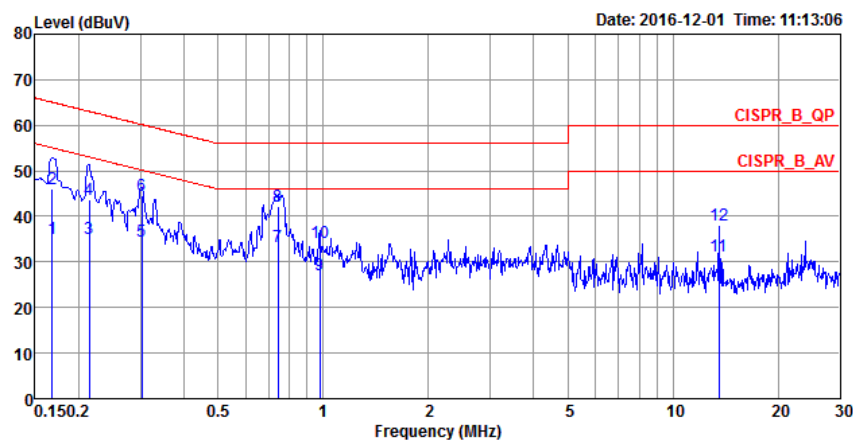


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1677	35.16	-19.92	55.08	24.97	10.02	0.17	NEUTRAL	Average
2	0.1677	46.10	-18.98	65.08	35.91	10.02	0.17	NEUTRAL	QP
3	0.2139	35.07	-17.98	53.05	24.98	9.92	0.17	NEUTRAL	Average
4	0.2139	43.81	-19.24	63.05	33.72	9.92	0.17	NEUTRAL	QP
5	0.3035	34.55	-15.60	50.15	24.55	9.92	0.08	NEUTRAL	Average
6	0.3035	44.59	-15.56	60.15	34.59	9.92	0.08	NEUTRAL	QP
7	0.7430	33.22	-12.78	46.00	22.79	9.93	0.50	NEUTRAL	Average
8	0.7430	42.35	-13.65	56.00	31.92	9.93	0.50	NEUTRAL	QP
9	0.9787	27.08	-18.92	46.00	16.42	9.94	0.72	NEUTRAL	Average
10	0.9787	34.36	-21.64	56.00	23.70	9.94	0.72	NEUTRAL	QP
11	13.5597	31.27	-18.73	50.00	20.86	10.21	0.20	NEUTRAL	Average
12	13.5597	38.12	-21.88	60.00	27.71	10.21	0.20	NEUTRAL	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Normal Link		

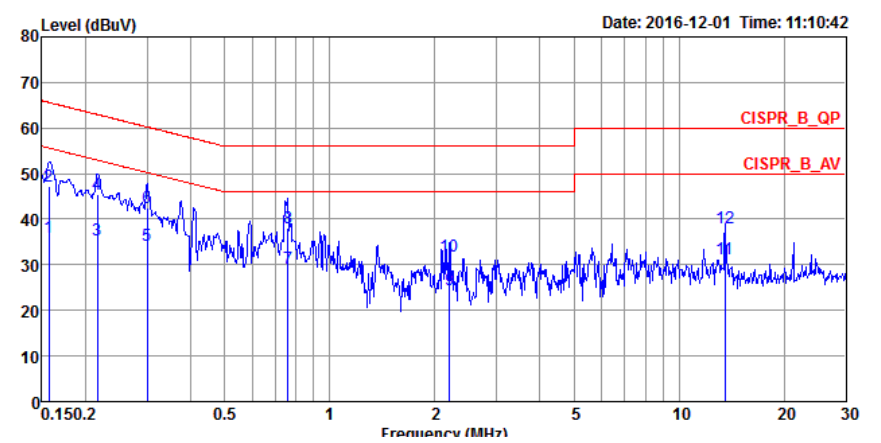

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1573	36.09	-19.51	55.60	25.90	10.02	0.17	LINE	Average
2	0.1573	47.22	-18.38	65.60	37.03	10.02	0.17	LINE	QP
3	0.2162	35.49	-17.47	52.96	25.40	9.92	0.17	LINE	Average
4	0.2162	45.39	-17.57	62.96	35.30	9.92	0.17	LINE	QP
5	0.3003	34.12	-16.12	50.24	24.11	9.92	0.09	LINE	Average
6	0.3003	42.47	-17.77	60.24	32.46	9.92	0.09	LINE	QP
7	0.7589	29.19	-16.81	46.00	18.74	9.93	0.52	LINE	Average
8	0.7589	38.06	-17.94	56.00	27.61	9.93	0.52	LINE	QP
9	2.2021	24.61	-21.39	46.00	14.59	9.96	0.06	LINE	Average
10	2.2021	31.78	-24.22	56.00	21.76	9.96	0.06	LINE	QP
11	13.5600	31.29	-18.71	50.00	20.88	10.21	0.20	LINE	Average
12	13.5600	38.18	-21.82	60.00	27.77	10.21	0.20	LINE	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)















Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4G;11b;Nss1;Ntx2	9.025M	13.9M	13M9G1D	8.075M	13.35M
2.4G;11g;Nss1;Ntx2	16.35M	16.8M	16M8D1D	16.325M	16.45M
2.4G;VHT20;Nss1,(M0);Ntx2	17.575M	17.9M	17M9D1D	17.525M	17.675M
2.4G;VHT40;Nss1,(M0);Ntx2	36.35M	36.25M	36M2D1D	32.55M	36.1M
2.4G;VHT20,BF;Nss1,(M0);Ntx2	17.575M	17.775M	17M8D1D	17.55M	17.675M
2.4G;VHT40,BF;Nss1,(M0);Ntx2	36.3M	36.3M	36M3D1D	33.75M	36.25M









Result

Mode	Result	Limit (Hz)	P1-N dB (Hz)	P1-OBW (Hz)	P2-N dB (Hz)	P2-OBW (Hz)
2.4G;11b;Nss1;Ntx2;2412	Pass	500k	8.55M	13.375M	8.075M	13.75M
2.4G;11b;Nss1;Ntx2;2437	Pass	500k	9.025M	13.35M	8.525M	13.7M
2.4G;11b;Nss1;Ntx2;2462	Pass	500k	8.5M	13.5M	8.55M	13.9M
2.4G;11g;Nss1;Ntx2;2412	Pass	500k	16.325M	16.45M	16.325M	16.5M
2.4G;11g;Nss1;Ntx2;2437	Pass	500k	16.325M	16.675M	16.325M	16.8M
2.4G;11g;Nss1;Ntx2;2462	Pass	500k	16.35M	16.45M	16.325M	16.525M
2.4G;VHT20;Nss1,(M0);Ntx2;2412	Pass	500k	17.575M	17.725M	17.575M	17.675M
2.4G;VHT20;Nss1,(M0);Ntx2;2437	Pass	500k	17.55M	17.825M	17.525M	17.9M
2.4G;VHT20;Nss1,(M0);Ntx2;2462	Pass	500k	17.575M	17.725M	17.55M	17.675M
2.4G;VHT40;Nss1,(M0);Ntx2;2422	Pass	500k	36.3M	36.2M	35.05M	36.25M
2.4G;VHT40;Nss1,(M0);Ntx2;2437	Pass	500k	34.55M	36.1M	32.75M	36.25M
2.4G;VHT40;Nss1,(M0);Ntx2;2452	Pass	500k	36.35M	36.25M	32.55M	36.2M
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2412	Pass	500k	17.575M	17.725M	17.575M	17.75M
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2437	Pass	500k	17.55M	17.75M	17.575M	17.775M
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2462	Pass	500k	17.575M	17.7M	17.575M	17.675M
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2422	Pass	500k	33.75M	36.25M	35.4M	36.25M
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2437	Pass	500k	34.3M	36.25M	34.4M	36.3M
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2452	Pass	500k	36.3M	36.3M	35.65M	36.3M

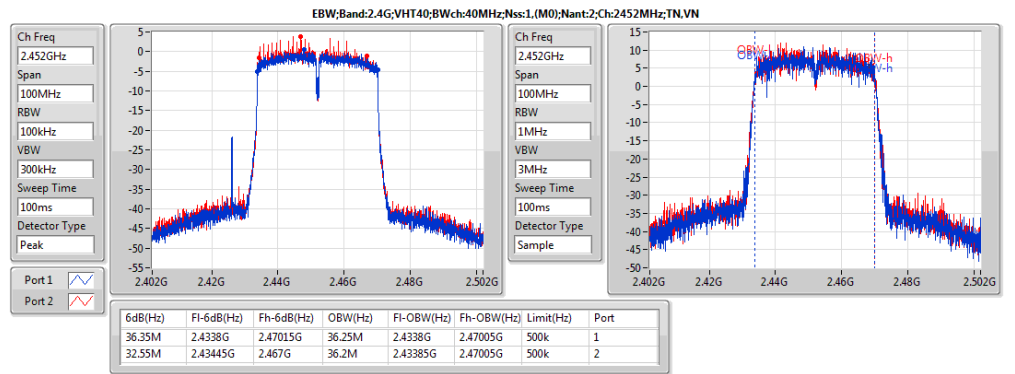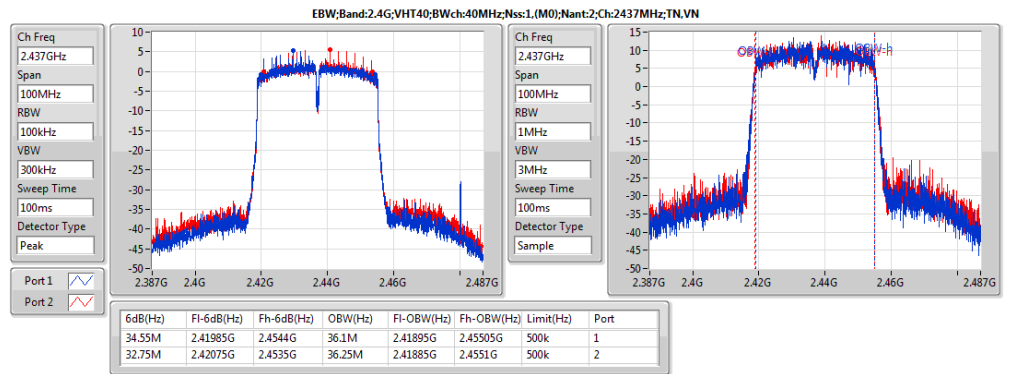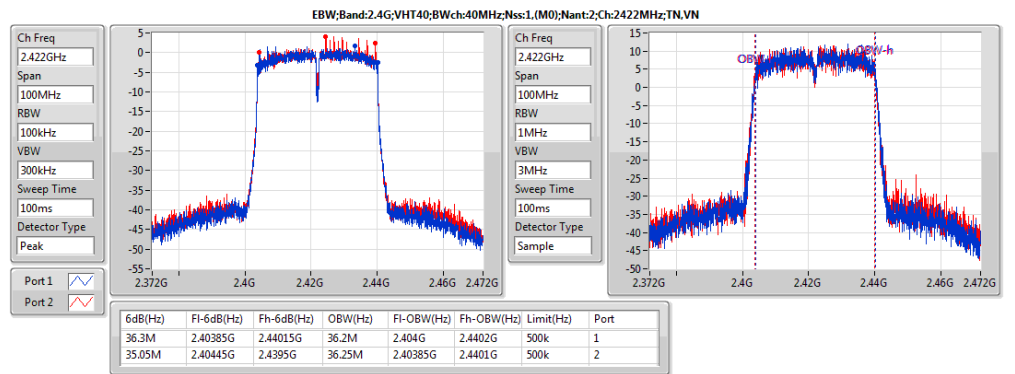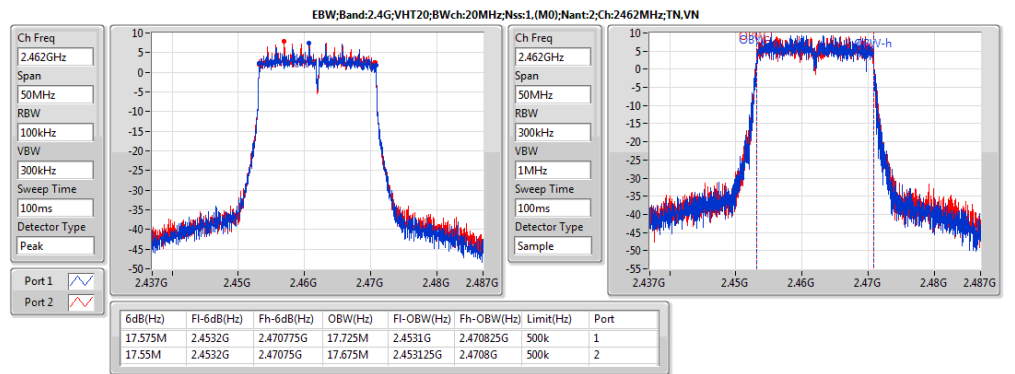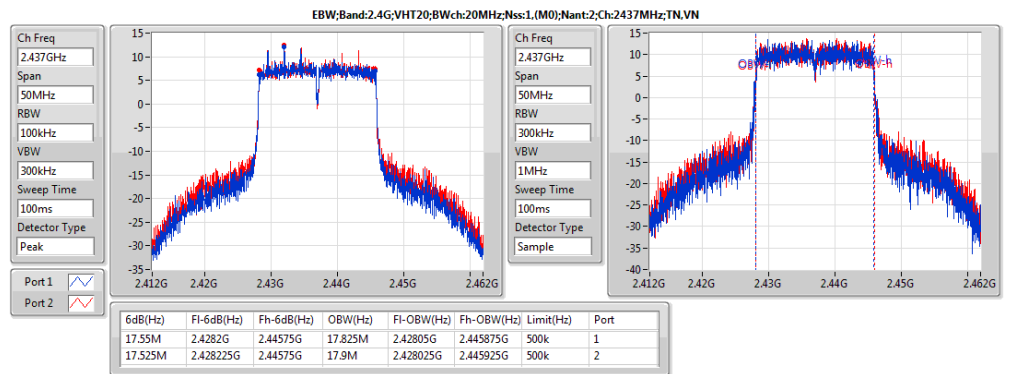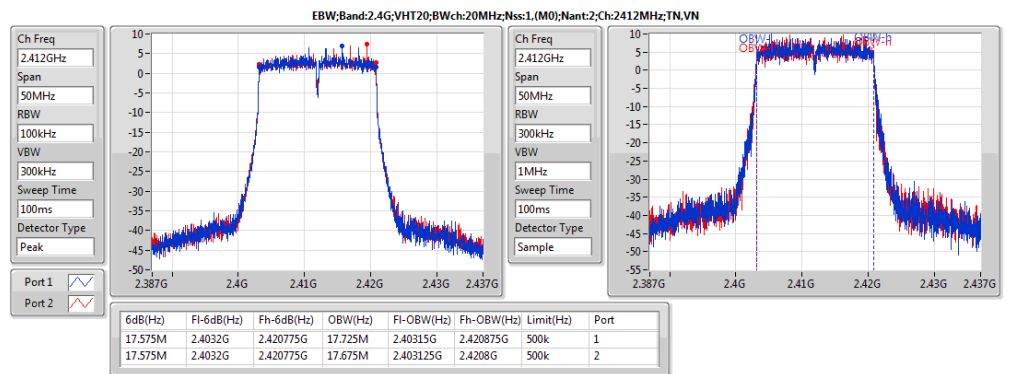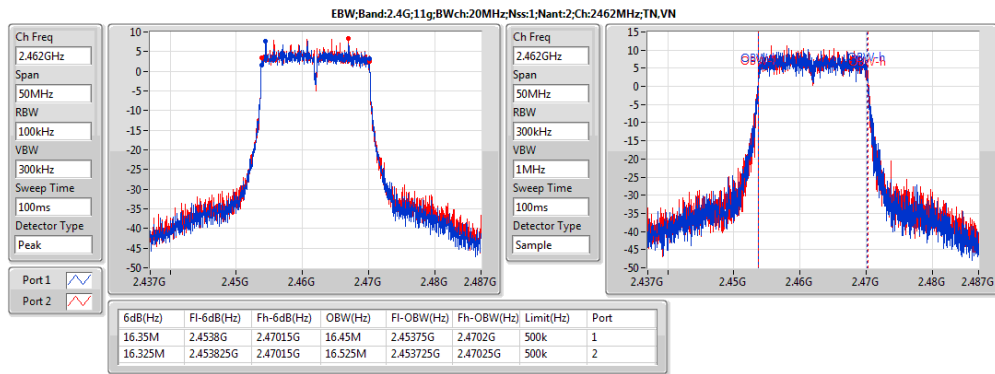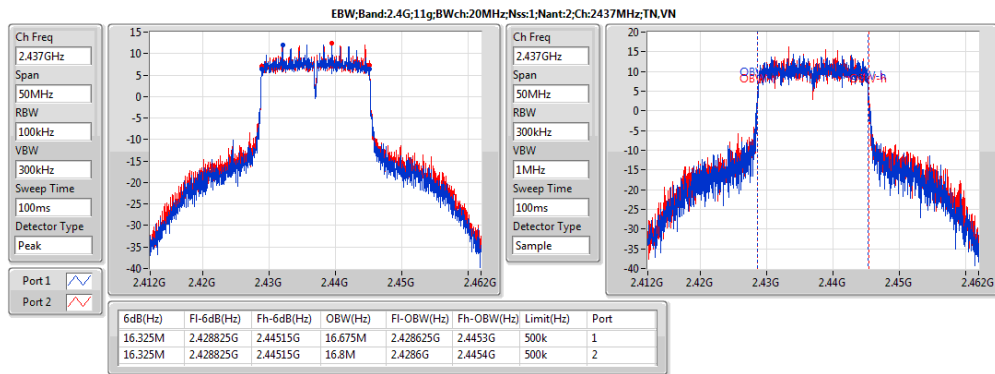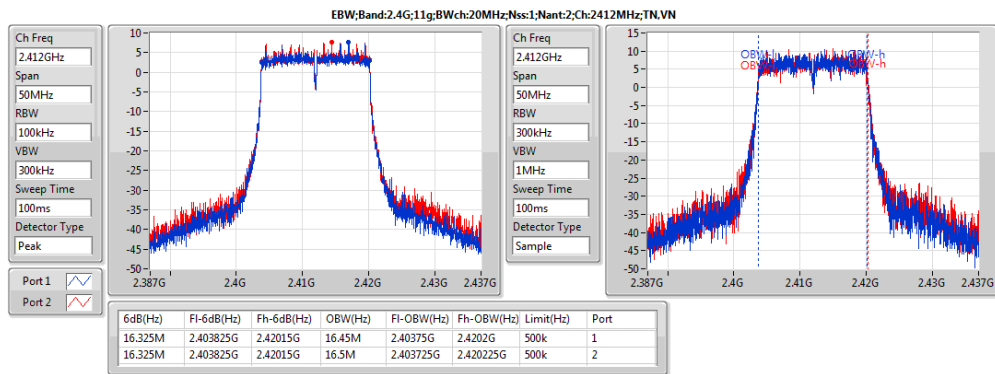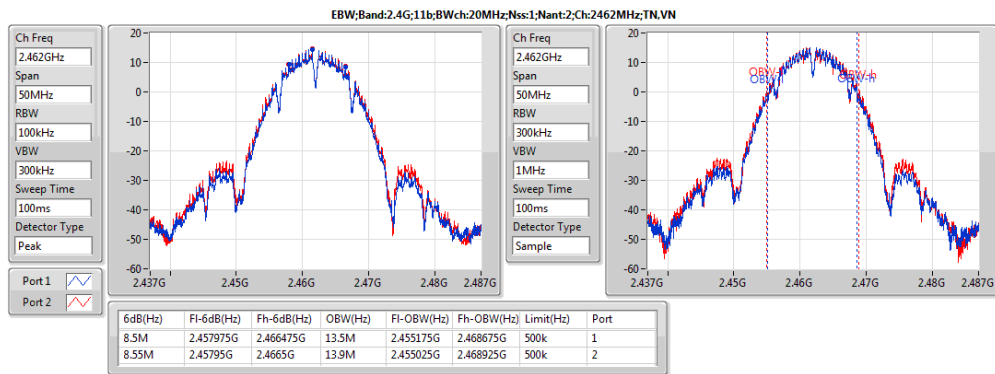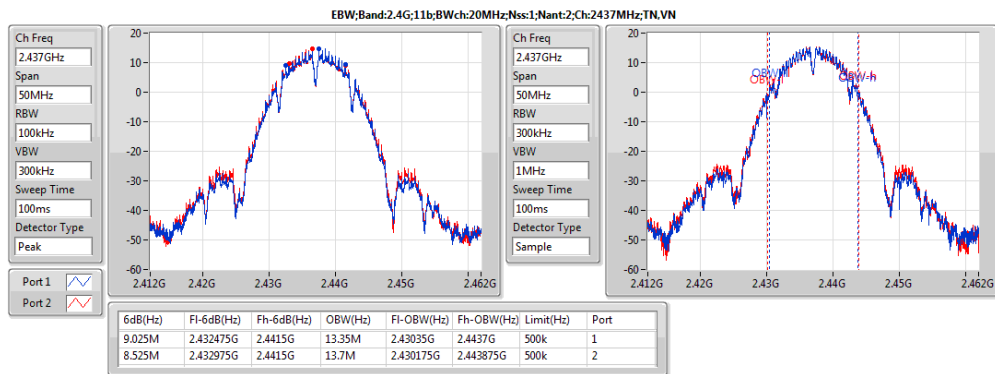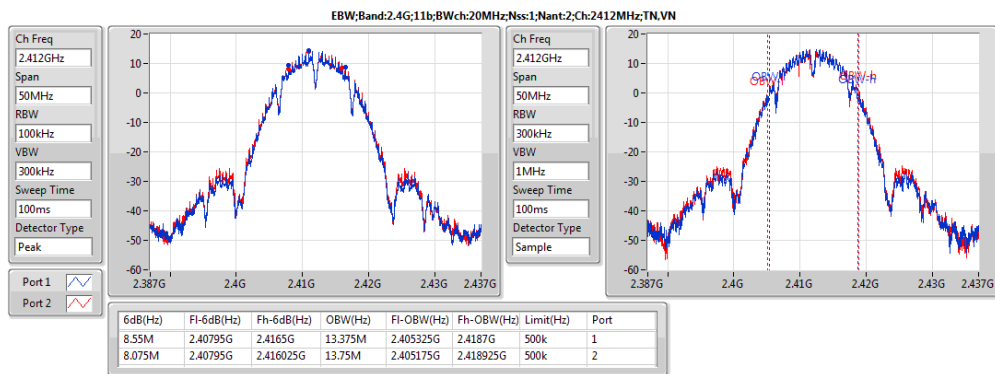



EBW Result

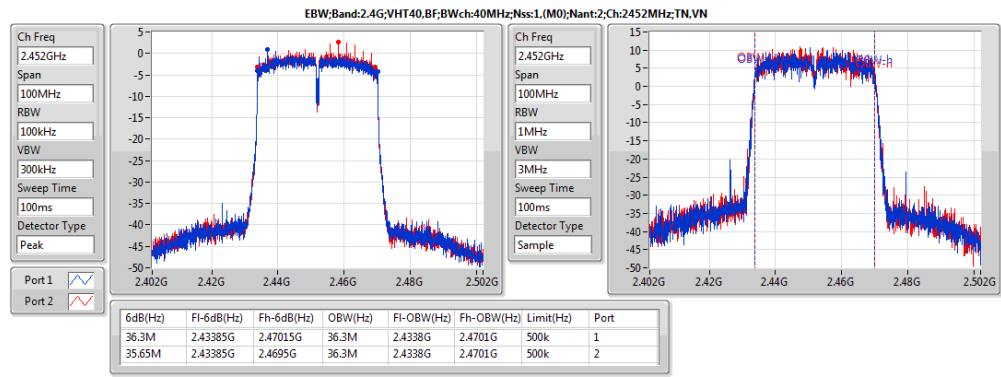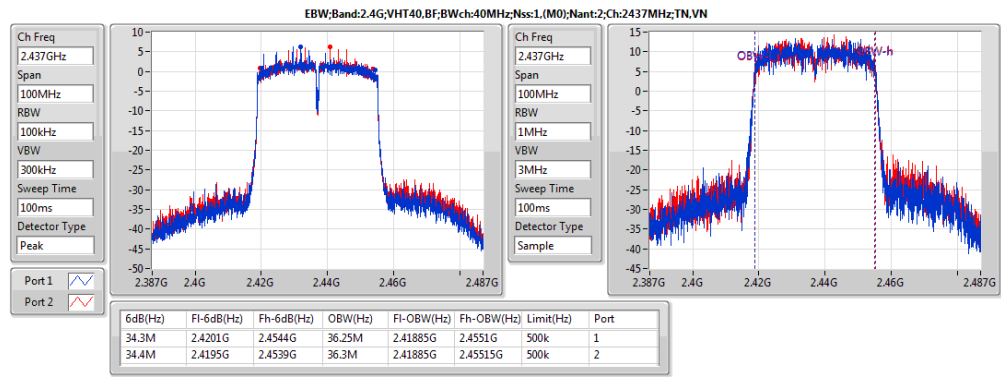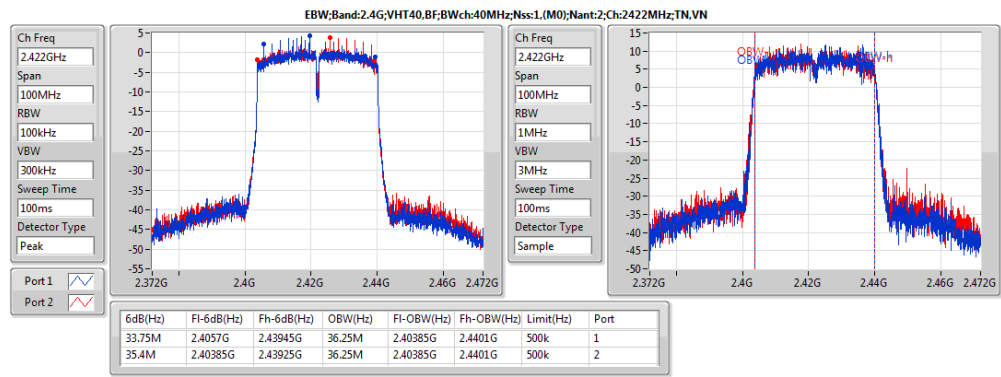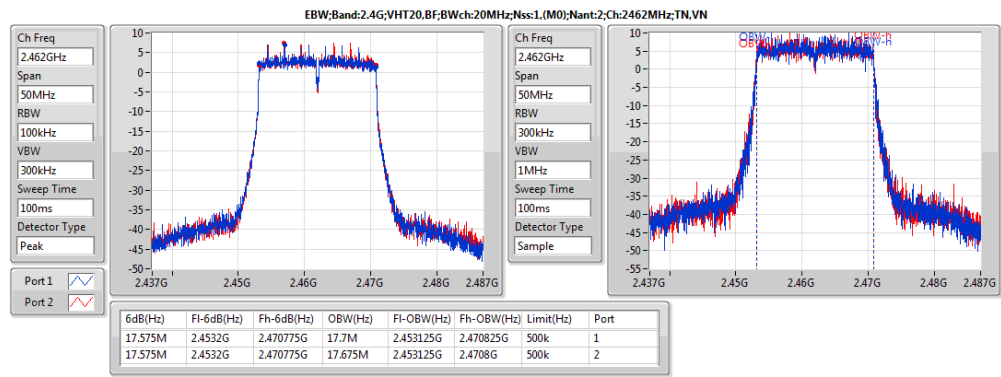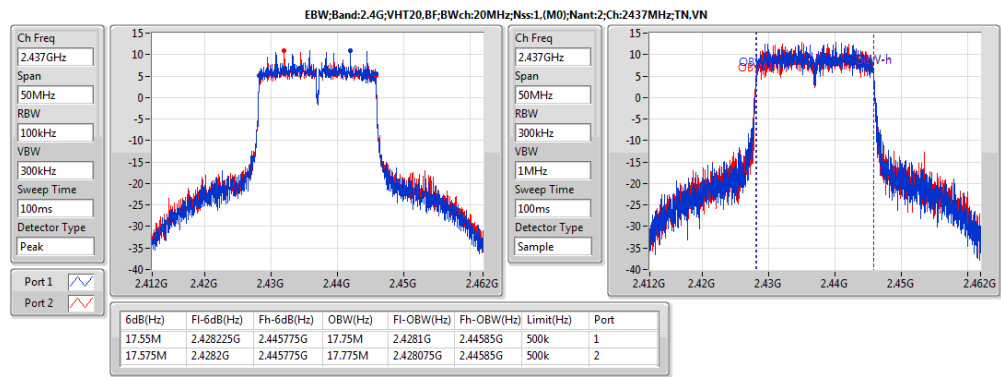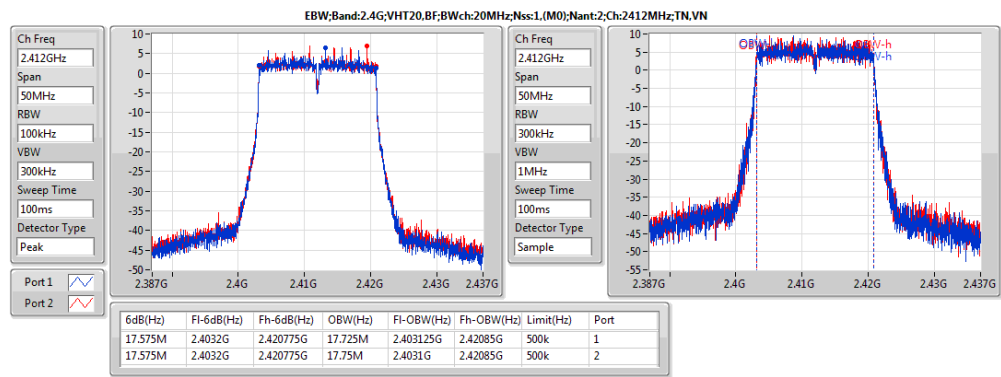



Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
2.4G;11b;Nss1;Ntx2	25.87	0.38637	27.17	0.52119
2.4G;11g;Nss1;Ntx2	25.73	0.37411	27.03	0.50466
2.4G;VHT20;Nss1,(M0);Ntx2	25.80	0.38019	27.10	0.51286
2.4G;VHT40;Nss1,(M0);Ntx2	21.35	0.13646	22.65	0.18408
2.4G;VHT20,BF;Nss1,(M0);Ntx2	25.77	0.37757	30.08	1.01859
2.4G;VHT40,BF;Nss1,(M0);Ntx2	21.09	0.12853	25.40	0.34674



Result

Mode	Result	DG (dBi)	Sum (dBm)	Sum Lim. (dBm)	EIRP (dBm)	EIRP Lim. (dBm)	P1 (dBm)	P2 (dBm)
2.4G;11b;Nss1;Ntx2;2412	Pass	1.30	25.87	30.00	27.17	36.00	22.75	22.96
2.4G;11b;Nss1;Ntx2;2437	Pass	1.30	25.68	30.00	26.98	36.00	22.54	22.79
2.4G;11b;Nss1;Ntx2;2462	Pass	1.30	25.61	30.00	26.91	36.00	22.51	22.68
2.4G;11g;Nss1;Ntx2;2412	Pass	1.30	21.44	30.00	22.74	36.00	18.37	18.49
2.4G;11g;Nss1;Ntx2;2437	Pass	1.30	25.73	30.00	27.03	36.00	22.83	22.61
2.4G;11g;Nss1;Ntx2;2462	Pass	1.30	21.30	30.00	22.60	36.00	18.11	18.47
2.4G;VHT20;Nss1,(M0);Ntx2;2412	Pass	1.30	20.87	30.00	22.17	36.00	17.74	17.98
2.4G;VHT20;Nss1,(M0);Ntx2;2437	Pass	1.30	25.80	30.00	27.10	36.00	22.7	22.88
2.4G;VHT20;Nss1,(M0);Ntx2;2462	Pass	1.30	20.76	30.00	22.06	36.00	17.53	17.95
2.4G;VHT40;Nss1,(M0);Ntx2;2422	Pass	1.30	19.87	30.00	21.17	36.00	16.75	16.96
2.4G;VHT40;Nss1,(M0);Ntx2;2437	Pass	1.30	21.35	30.00	22.65	36.00	18.19	18.48
2.4G;VHT40;Nss1,(M0);Ntx2;2452	Pass	1.30	19.54	30.00	20.84	36.00	16.51	16.55
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2412	Pass	4.31	20.11	30.00	24.42	36.00	17.05	17.14
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2437	Pass	4.31	25.77	30.00	30.08	36.00	22.84	22.68
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2462	Pass	4.31	20.58	30.00	24.89	36.00	17.52	17.61
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2422	Pass	4.31	19.72	30.00	24.03	36.00	16.65	16.77
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2437	Pass	4.31	21.09	30.00	25.40	36.00	18.02	18.13
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2452	Pass	4.31	19.96	30.00	24.27	36.00	16.97	16.92















Summary

Mode	PD (dBm/RBW)	EIRP.PD (dBm/RBW)
2.4G;11b;Nss1;Ntx2	2.30	6.61
2.4G;11g;Nss1;Ntx2	1.19	5.50
2.4G;VHT20;Nss1,(M0);Ntx2	-0.21	4.10
2.4G;VHT40;Nss1,(M0);Ntx2	-6.28	-1.97
2.4G;VHT20,BF;Nss1,(M0);Ntx2	-0.99	3.32
2.4G;VHT40,BF;Nss1,(M0);Ntx2	-5.76	-1.45









Result

Mode	Result	DG (dBi)	PD (dBm/RBW)	PD.Limit (dBm/RBW)	P1 (dBm/RBW)	P2 (dBm/RBW)
2.4G;11b;Nss1;Ntx2;2412	Pass	4.31	2.30	8.00	0.36	0.53
2.4G;11b;Nss1;Ntx2;2437	Pass	4.31	2.10	8.00	0.65	-1.36
2.4G;11b;Nss1;Ntx2;2462	Pass	4.31	1.70	8.00	0.22	-0.56
2.4G;11g;Nss1;Ntx2;2412	Pass	4.31	-4.56	8.00	-7.52	-7.07
2.4G;11g;Nss1;Ntx2;2437	Pass	4.31	1.19	8.00	-1.99	-1.61
2.4G;11g;Nss1;Ntx2;2462	Pass	4.31	-3.02	8.00	-6.40	-5.69
2.4G;VHT20;Nss1,(M0);Ntx2;2412	Pass	4.31	-5.23	8.00	-6.60	-7.47
2.4G;VHT20;Nss1,(M0);Ntx2;2437	Pass	4.31	-0.21	8.00	-0.98	-2.28
2.4G;VHT20;Nss1,(M0);Ntx2;2462	Pass	4.31	-5.64	8.00	-9.00	-8.33
2.4G;VHT40;Nss1,(M0);Ntx2;2422	Pass	4.31	-8.58	8.00	-11.66	-9.07
2.4G;VHT40;Nss1,(M0);Ntx2;2437	Pass	4.31	-6.28	8.00	-9.03	-8.81
2.4G;VHT40;Nss1,(M0);Ntx2;2452	Pass	4.31	-9.77	8.00	-11.25	-10.63
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2412	Pass	4.31	-5.56	8.00	-8.85	-7.32
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2437	Pass	4.31	-0.99	8.00	-3.75	-4.21
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2462	Pass	4.31	-4.93	8.00	-8.15	-7.49
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2422	Pass	4.31	-8.67	8.00	-12.07	-9.30
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2437	Pass	4.31	-5.76	8.00	-8.96	-8.36
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2452	Pass	4.31	-8.22	8.00	-9.47	-11.09

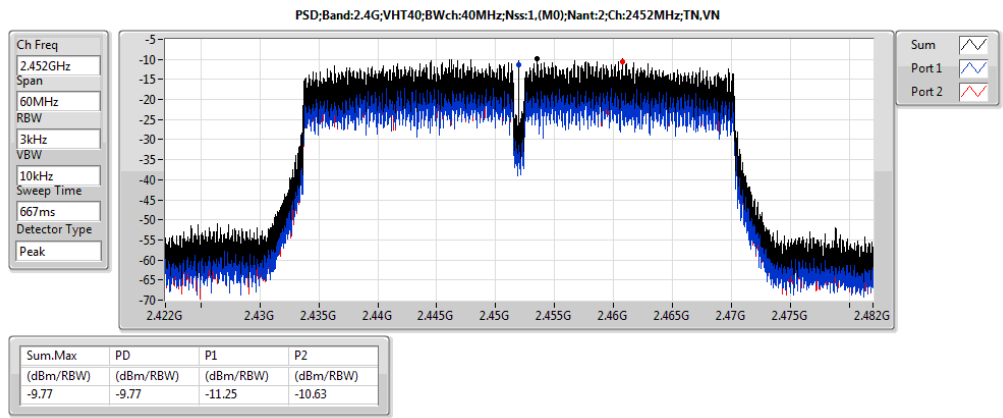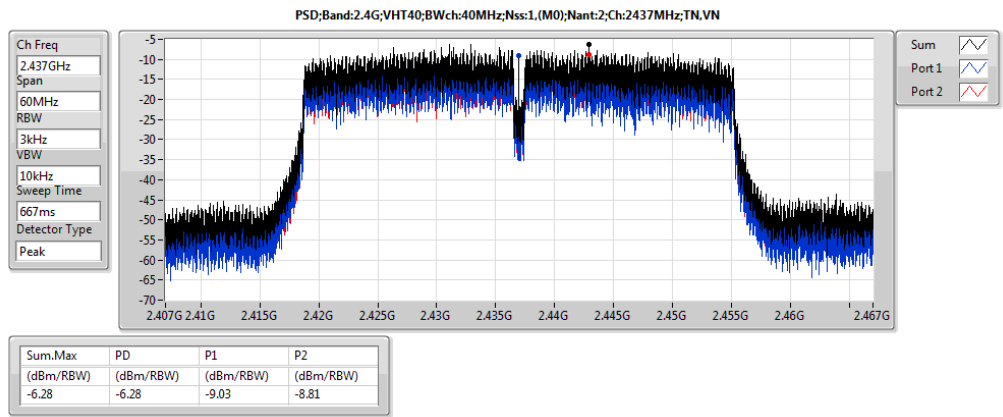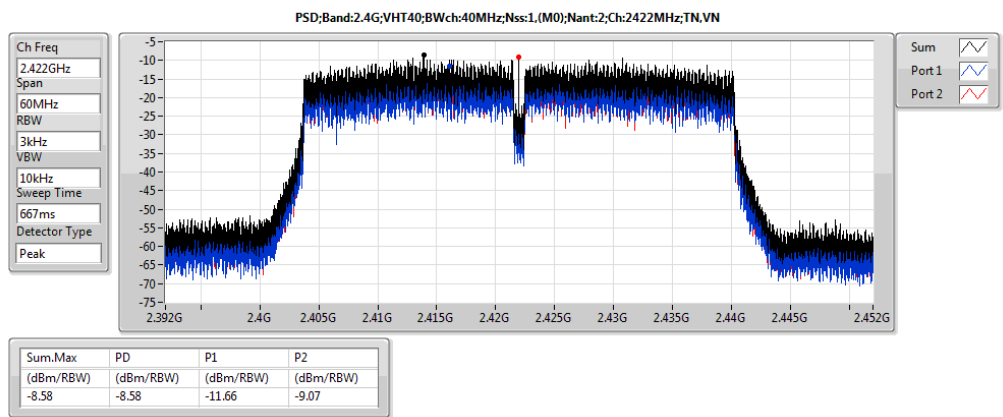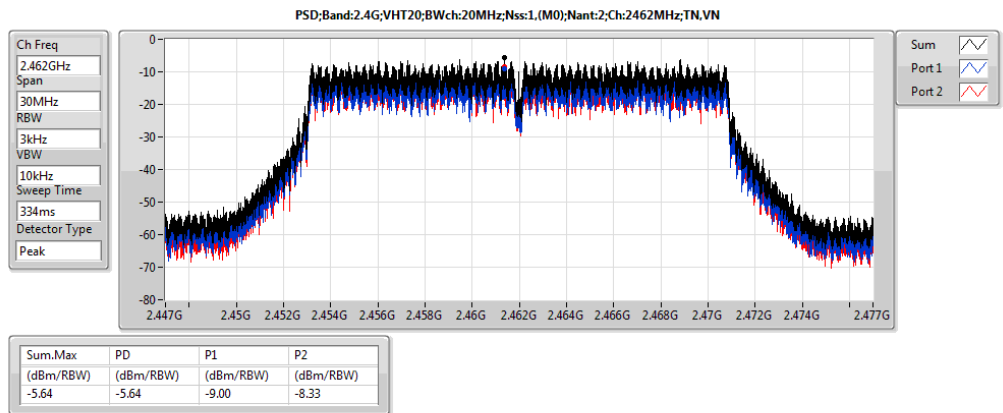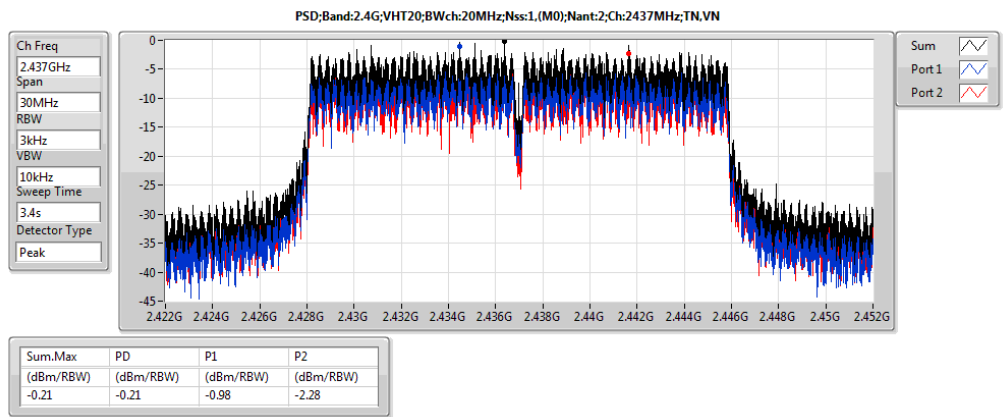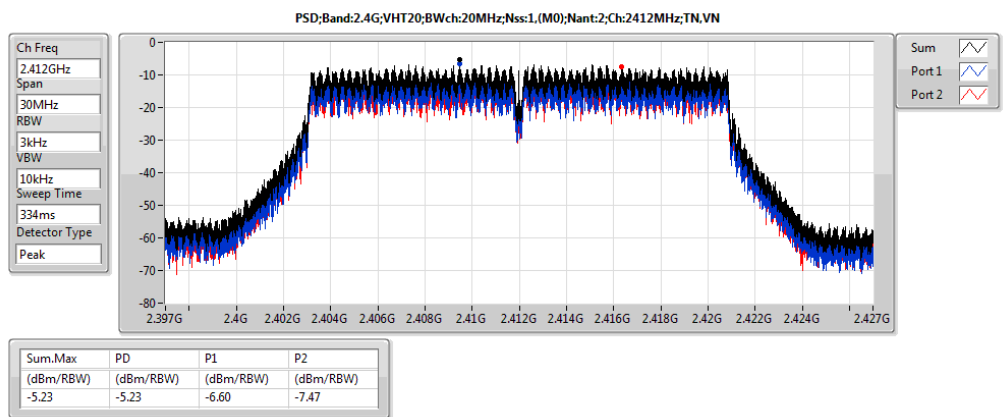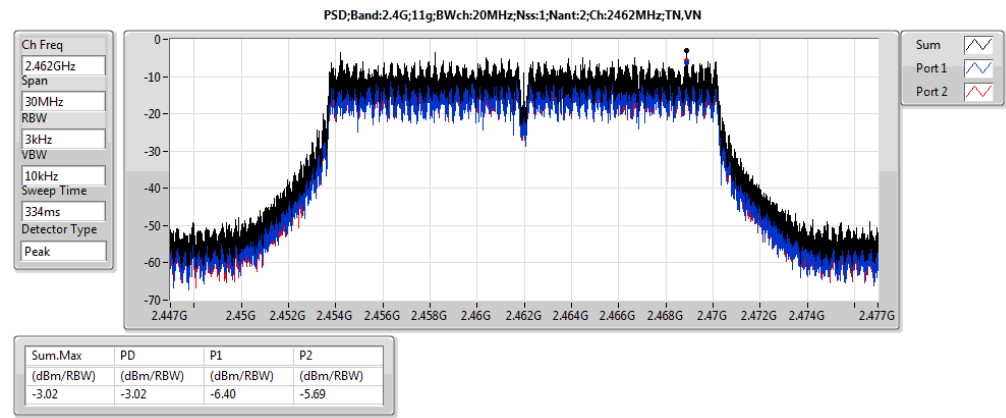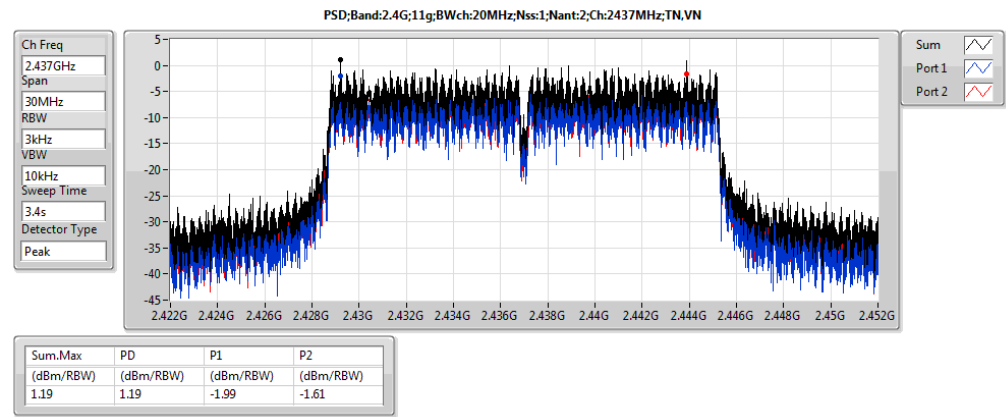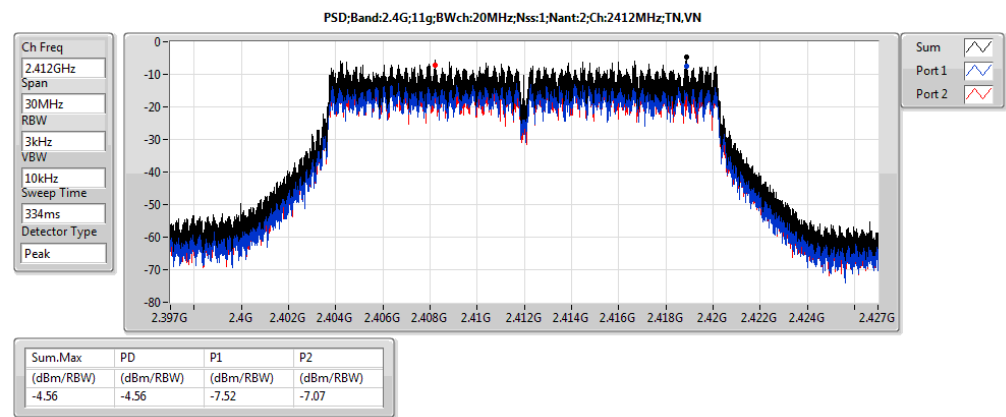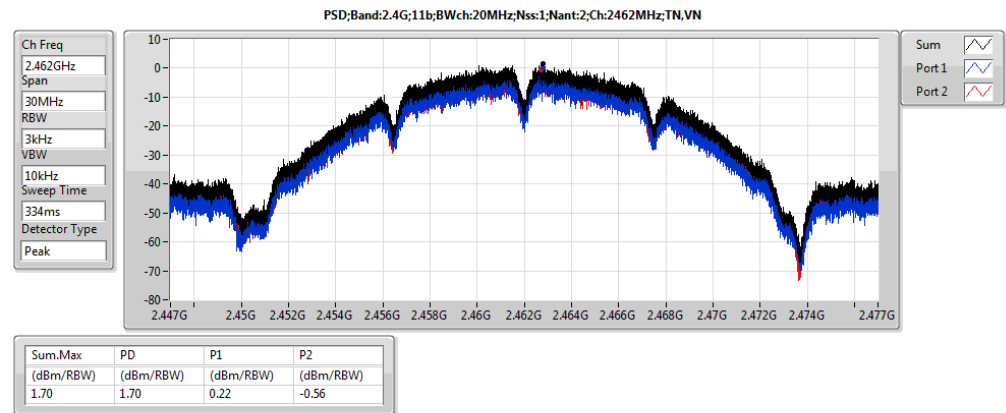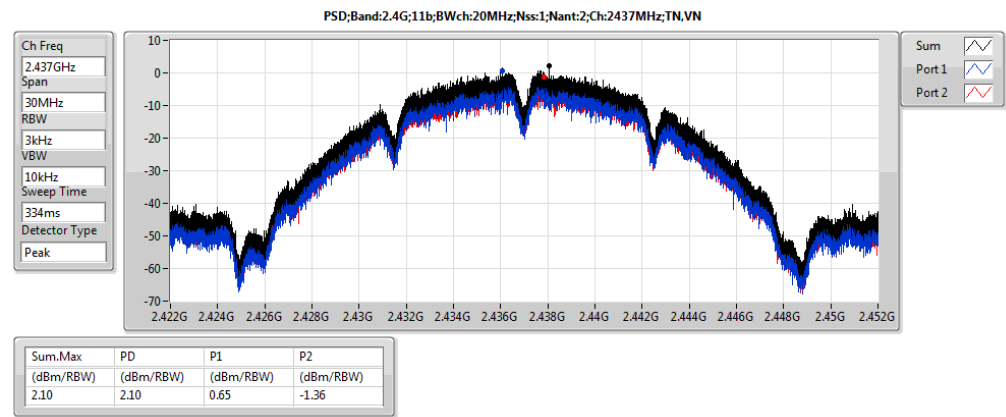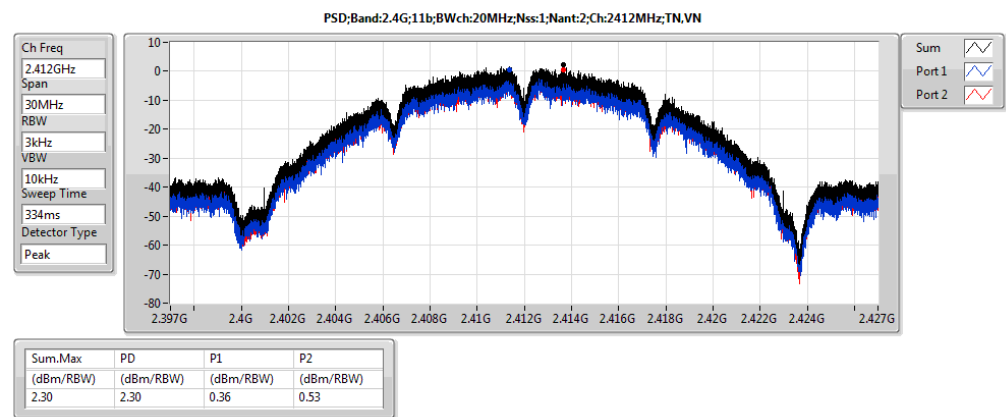



PSD Result

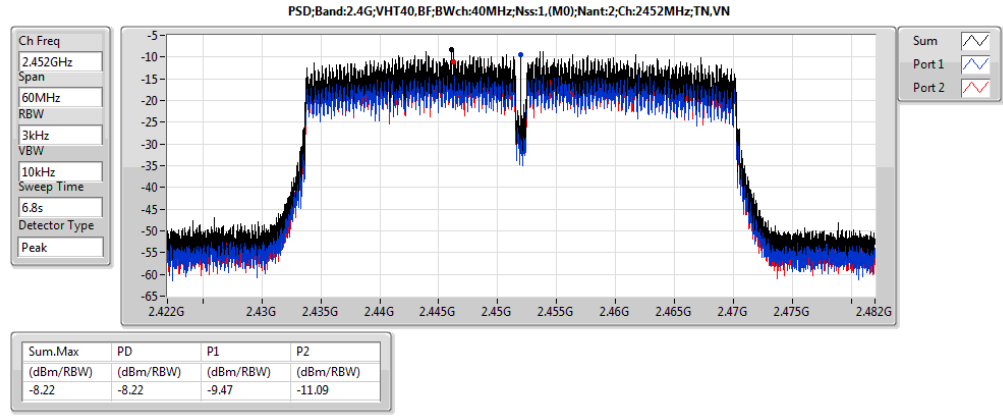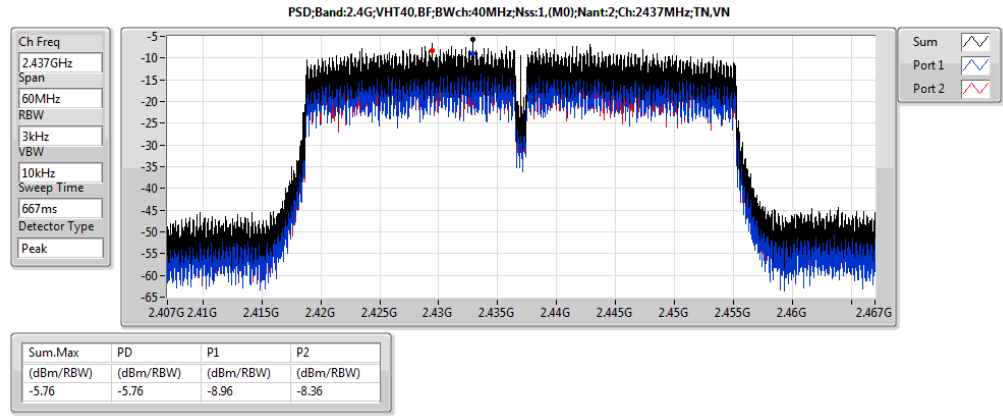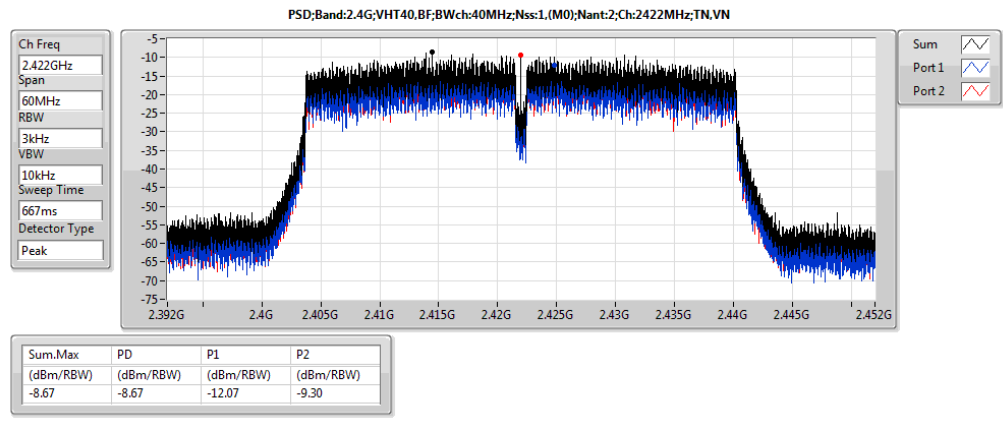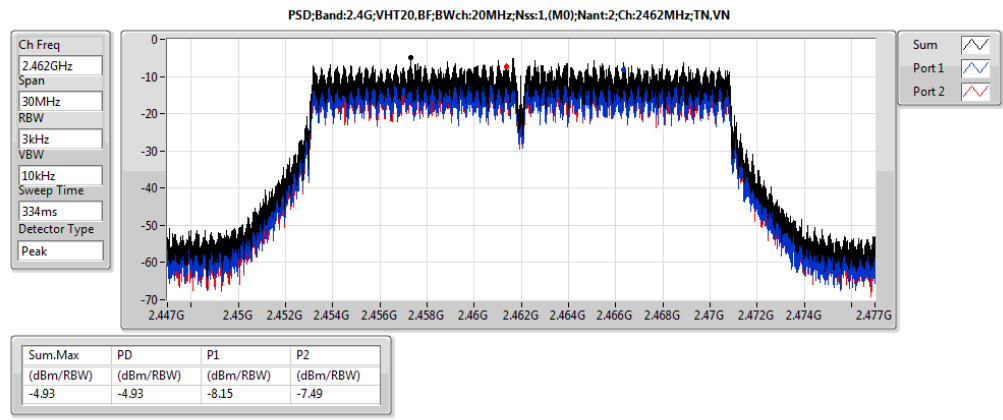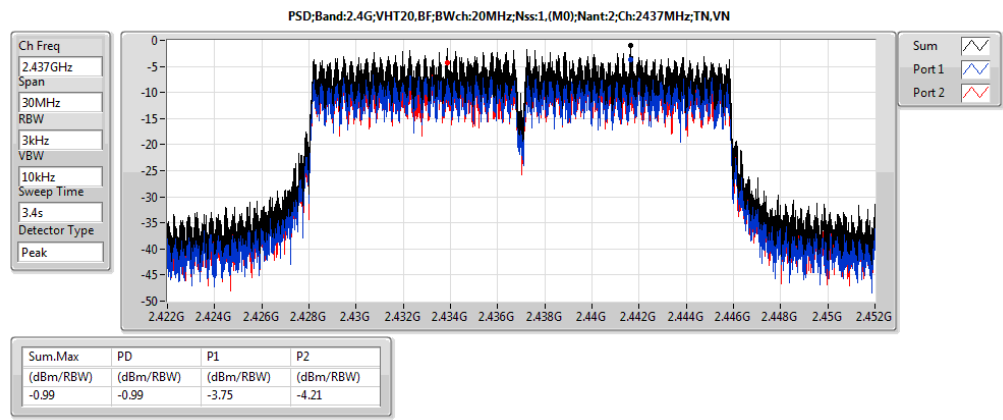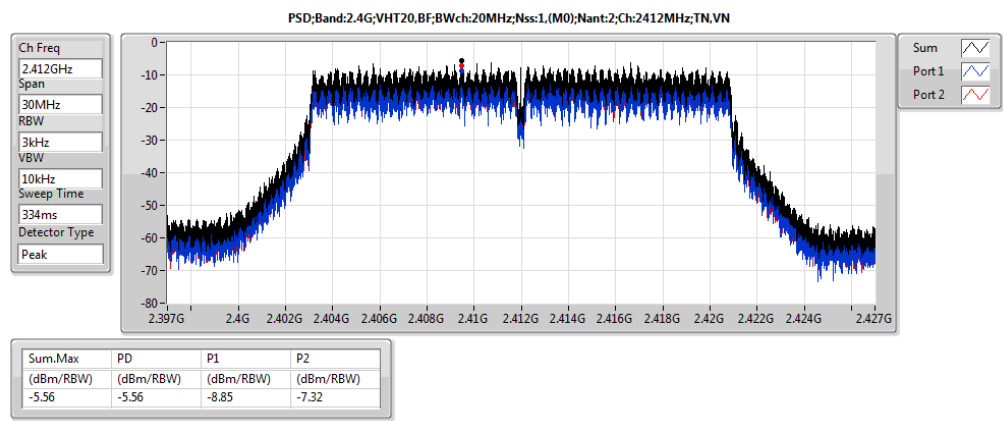





Summary





Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4G;VHT40;Nss1,(M0);Ntx2;2437	Pass	2.434569G	-11.32	-41.32	1.913525G	-63.14	2.3992G	-54.62	2.48382G	-59.09	24.270814G	-45.59	1











Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4G;11b;Nss1;Ntx2;2412	Pass	2.436406G	-3.25	-33.25	1.85206G	-63.89	2.39904G	-45.14	2.49902G	-63.17	24.879189G	-45.45	1
2.4G;11b;Nss1;Ntx2;2412	Pass	2.436406G	-3.25	-33.25	2.09904G	-63.99	2.39904G	-43.74	2.49206G	-62.25	24.803331G	-42.92	2
2.4G;11b;Nss1;Ntx2;2437	Pass	2.436406G	-3.25	-33.25	2.309905G	-62.96	2.3936G	-62.77	2.5027G	-62.82	15.349153G	-46.23	1
2.4G;11b;Nss1;Ntx2;2437	Pass	2.436406G	-3.25	-33.25	2.118845G	-63.57	2.39792G	-63.09	2.5027G	-62.53	24.969095G	-45.89	2
2.4G;11b;Nss1;Ntx2;2462	Pass	2.436406G	-3.25	-33.25	2.132825G	-63.23	2.39504G	-63.21	2.49046G	-60.00	24.67971G	-45.94	1
2.4G;11b;Nss1;Ntx2;2462	Pass	2.436406G	-3.25	-33.25	1.79148G	-64.01	2.39168G	-63.27	2.48902G	-60.58	24.969095G	-45.51	2
2.4G;11g;Nss1;Ntx2;2412	Pass	2.434569G	-4.87	-34.87	1.946425G	-63.50	2.39952G	-46.43	2.49902G	-63.21	24.800521G	-45.86	1
2.4G;11g;Nss1;Ntx2;2412	Pass	2.434569G	-4.87	-34.87	2.08972G	-64.24	2.39952G	-46.68	2.50326G	-63.21	14.219709G	-45.57	2
2.4G;11g;Nss1;Ntx2;2437	Pass	2.434569G	-4.87	-34.87	1.88934G	-63.46	2.39928G	-56.41	2.48566G	-60.00	24.707806G	-44.58	1
2.4G;11g;Nss1;Ntx2;2437	Pass	2.434569G	-4.87	-34.87	2.307575G	-63.96	2.3996G	-53.36	2.4851G	-57.87	14.138231G	-45.64	2
2.4G;11g;Nss1;Ntx2;2462	Pass	2.434569G	-4.87	-34.87	1.617895G	-63.45	2.39528G	-63.18	2.48382G	-54.35	24.792092G	-45.67	1
2.4G;11g;Nss1;Ntx2;2462	Pass	2.434569G	-4.87	-34.87	2.179425G	-64.29	2.39504G	-62.61	2.48382G	-52.93	22.007816G	-46.25	2
2.4G;VHT20;Nss1,(M0);Ntx2;2412	Pass	2.429559G	-5.29	-35.29	1.806625G	-64.48	2.3968G	-52.68	2.49446G	-62.69	14.242185G	-44.74	1
2.4G;VHT20;Nss1,(M0);Ntx2;2412	Pass	2.429559G	-5.29	-35.29	2.14098G	-64.15	2.39912G	-51.54	2.4939G	-63.00	24.140274G	-46.06	2
2.4G;VHT20;Nss1,(M0);Ntx2;2437	Pass	2.429559G	-5.29	-35.29	1.9872G	-63.84	2.39984G	-53.34	2.48382G	-59.54	21.693145G	-45.62	1
2.4G;VHT20;Nss1,(M0);Ntx2;2437	Pass	2.429559G	-5.29	-35.29	2.067585G	-63.71	2.39864G	-52.46	2.48446G	-55.13	17.520945G	-45.93	2
2.4G;VHT20;Nss1,(M0);Ntx2;2462	Pass	2.429559G	-5.29	-35.29	1.841575G	-62.87	2.39288G	-63.00	2.48974G	-57.11	14.129803G	-44.64	1
2.4G;VHT20;Nss1,(M0);Ntx2;2462	Pass	2.429559G	-5.29	-35.29	1.77051G	-64.05	2.39168G	-62.86	2.48358G	-56.11	17.453515G	-45.44	2
2.4G;VHT40;Nss1,(M0);Ntx2;2422	Pass	2.434569G	-11.32	-41.32	1.860855G	-63.01	2.39584G	-52.18	2.48702G	-61.89	24.837335G	-46.48	1
2.4G;VHT40;Nss1,(M0);Ntx2;2422	Pass	2.434569G	-11.32	-41.32	2.302825G	-63.01	2.39456G	-52.79	2.4851G	-62.37	17.542668G	-46.15	2
2.4G;VHT40;Nss1,(M0);Ntx2;2437	Pass	2.434569G	-11.32	-41.32	1.913525G	-63.14	2.3992G	-54.62	2.48382G	-59.09	24.270814G	-45.59	1
2.4G;VHT40;Nss1,(M0);Ntx2;2437	Pass	2.434569G	-11.32	-41.32	2.17344G	-63.17	2.39584G	-51.17	2.48446G	-57.58	24.943909G	-45.83	2
2.4G;VHT40;Nss1,(M0);Ntx2;2452	Pass	2.434569G	-11.32	-41.32	2.066955G	-63.95	2.39952G	-59.77	2.4867G	-56.99	14.244503G	-45.97	1
2.4G;VHT40;Nss1,(M0);Ntx2;2452	Pass	2.434569G	-11.32	-41.32	2.037185G	-63.26	2.39952G	-60.87	2.48542G	-55.33	17.478163G	-46.34	2
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2412	Pass	2.444589G	-7.82	-37.82	2.032635G	-63.87	2.39976G	-54.06	2.4939G	-62.74	21.670668G	-45.36	1
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2412	Pass	2.444589G	-7.82	-37.82	900.255M	-63.90	2.39992G	-53.85	2.48598G	-62.12	14.292757G	-45.70	2
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2437	Pass	2.444589G	-7.82	-37.82	2.184085G	-63.04	2.39992G	-57.52	2.49614G	-61.21	22.007816G	-45.65	1
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2437	Pass	2.444589G	-7.82	-37.82	873.46M	-64.28	2.3976G	-56.23	2.48446G	-60.79	14.247804G	-45.60	2
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2462	Pass	2.444589G	-7.82	-37.82	2.309905G	-61.91	2.39352G	-63.14	2.48422G	-57.70	24.904475G	-44.82	1
2.4G;VHT20,BF;Nss1,(M0);Ntx2;2462	Pass	2.444589G	-7.82	-37.82	2.023315G	-63.72	2.39728G	-62.66	2.48358G	-56.45	21.999387G	-45.49	2
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2422	Pass	2.434569G	-10.13	-40.13	2.05207G	-62.62	2.39648G	-53.33	2.48494G	-62.19	24.298859G	-46.21	1
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2422	Pass	2.434569G	-10.13	-40.13	1.74521G	-62.50	2.39328G	-52.18	2.49438G	-61.92	14.721278G	-45.44	2
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2437	Pass	2.434569G	-10.13	-40.13	1.883755G	-63.83	2.39872G	-49.33	2.48366G	-55.94	24.848554G	-44.70	1
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2437	Pass	2.434569G	-10.13	-40.13	1.93757G	-64.30	2.3992G	-48.13	2.48542G	-52.64	24.851358G	-46.26	2
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2452	Pass	2.434569G	-10.13	-40.13	98.7M	-63.87	2.39616G	-61.32	2.48574G	-56.18	24.697107G	-45.31	1
2.4G;VHT40,BF;Nss1,(M0);Ntx2;2452	Pass	2.434569G	-10.13	-40.13	1.867725G	-63.91	2.39792G	-58.23	2.48734G	-57.75	24.141804G	-45.95	2

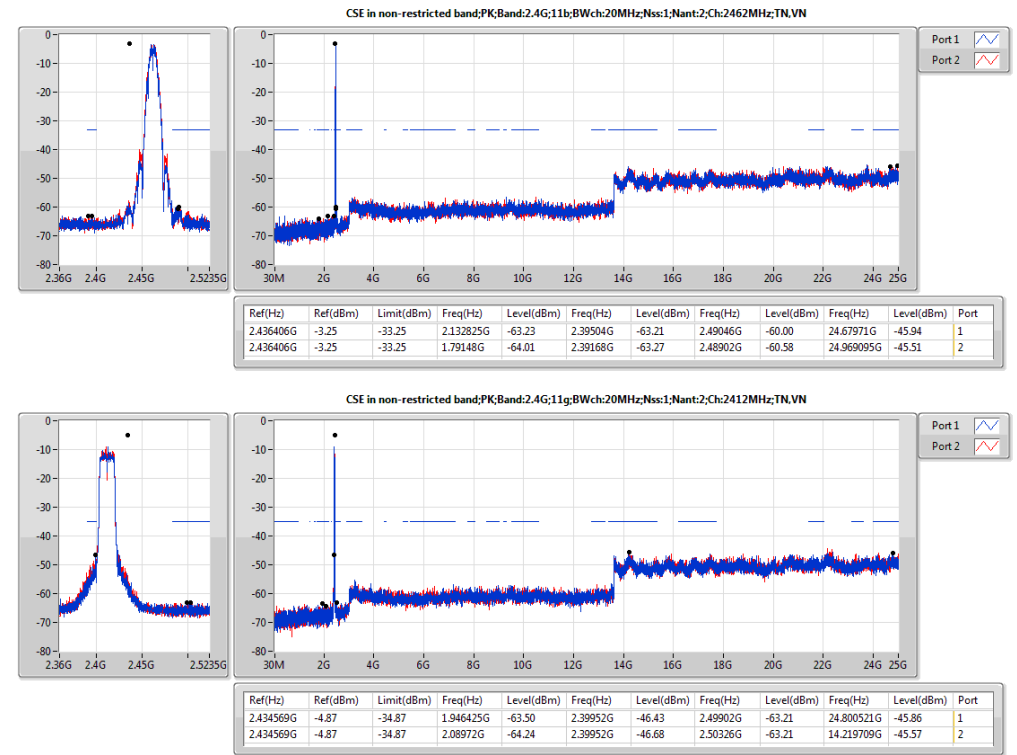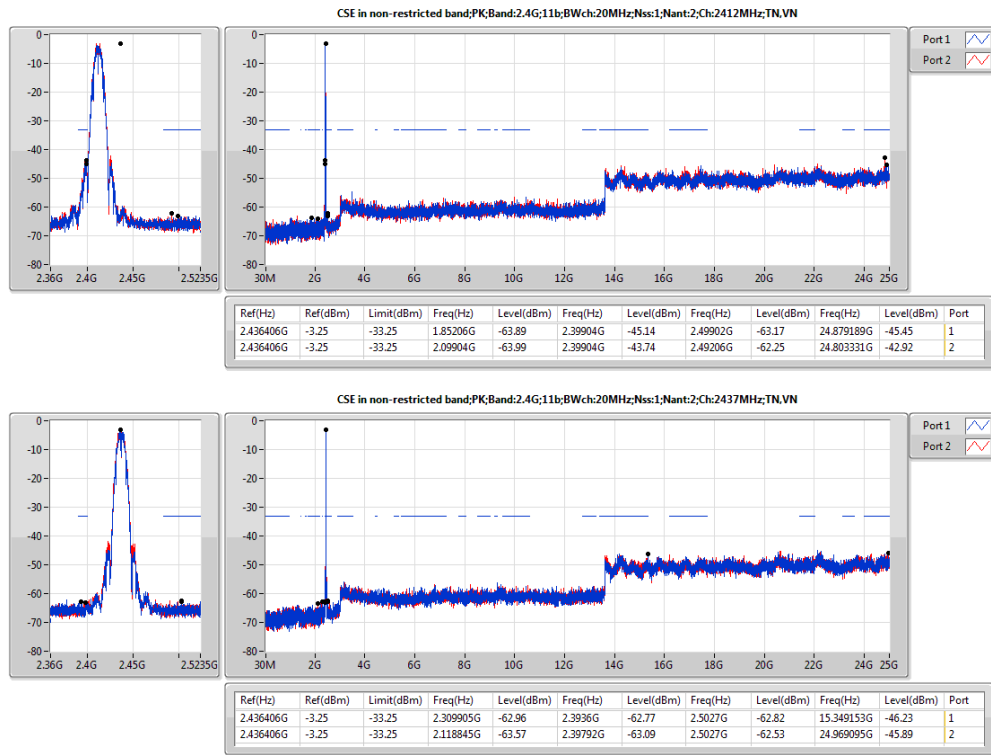

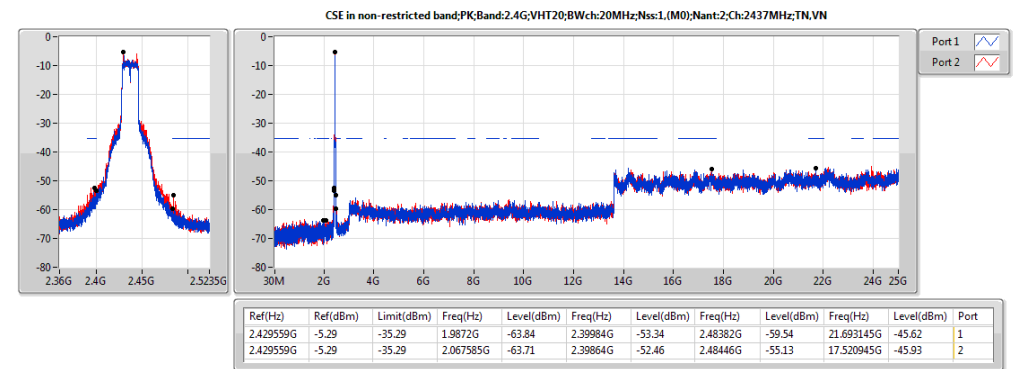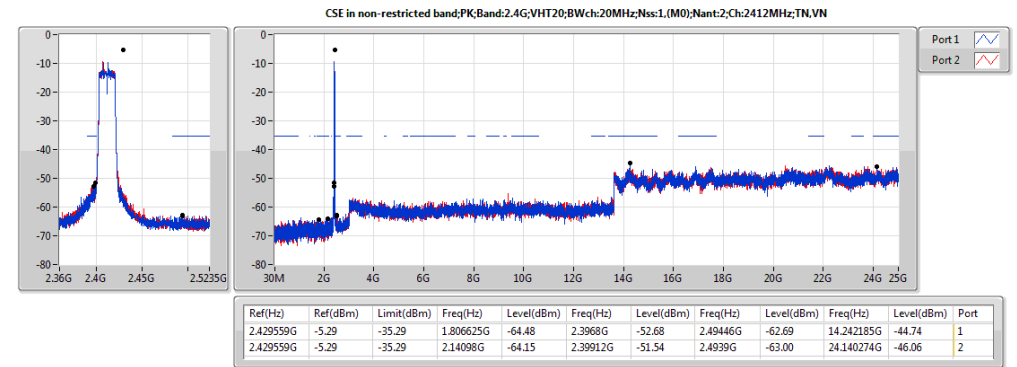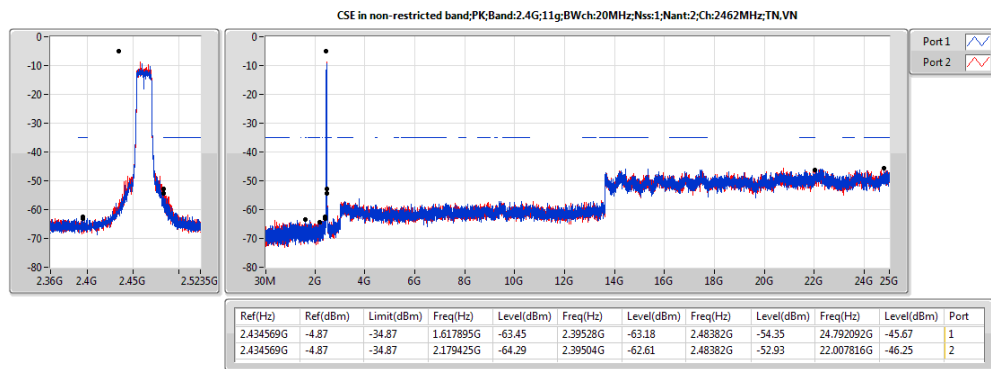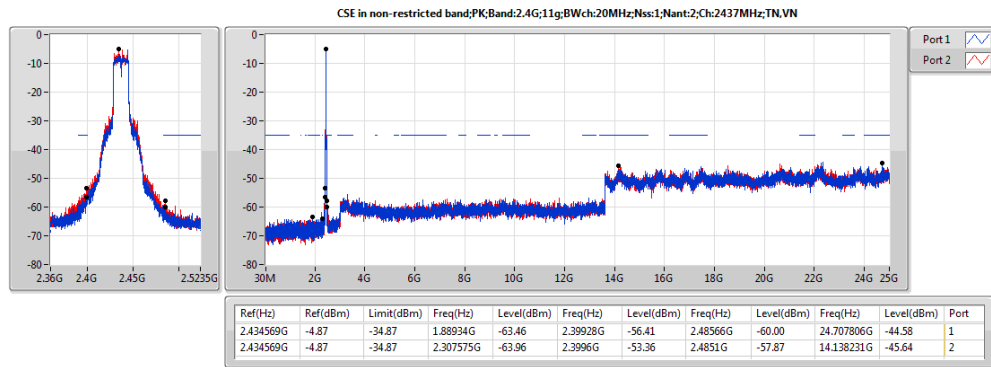


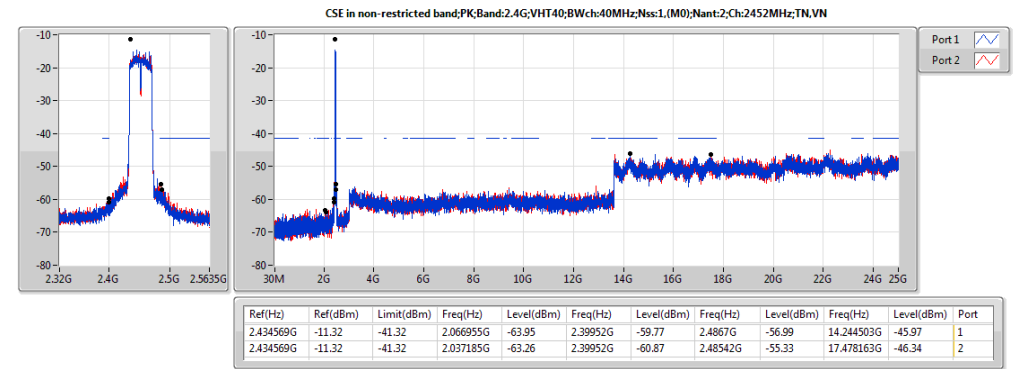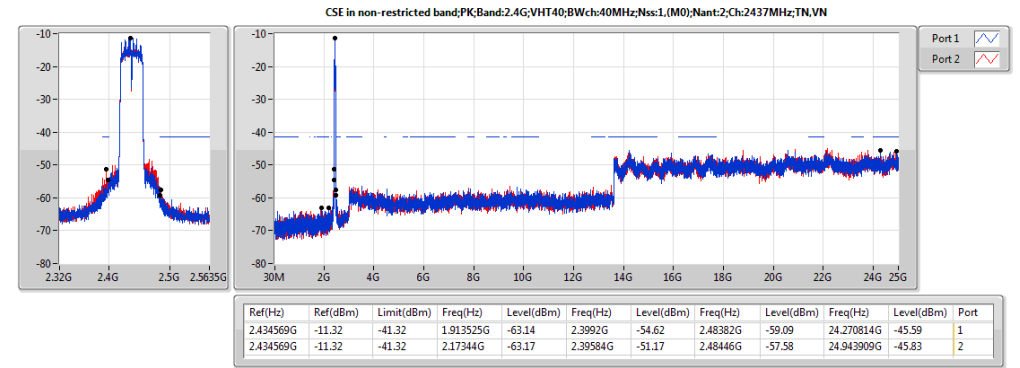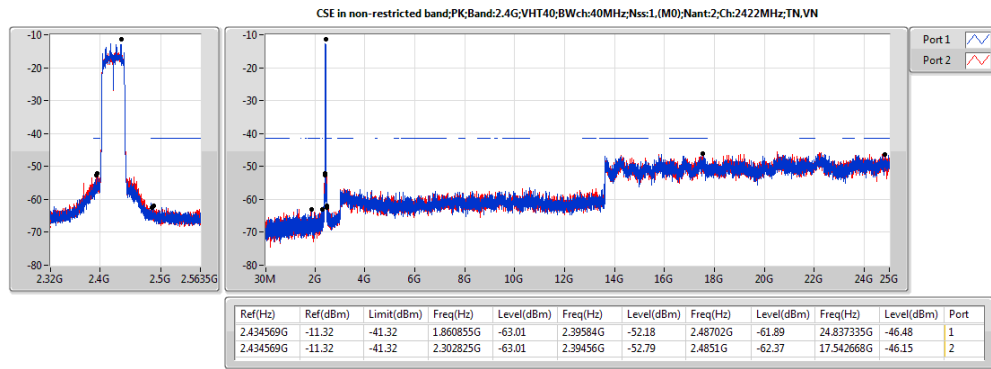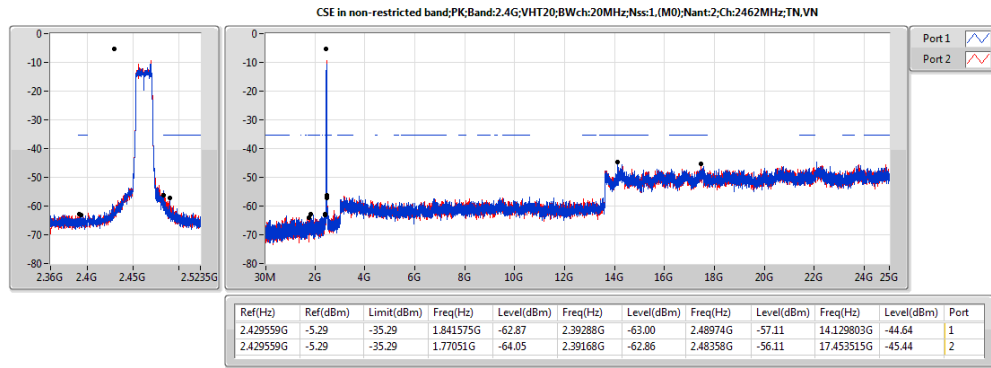


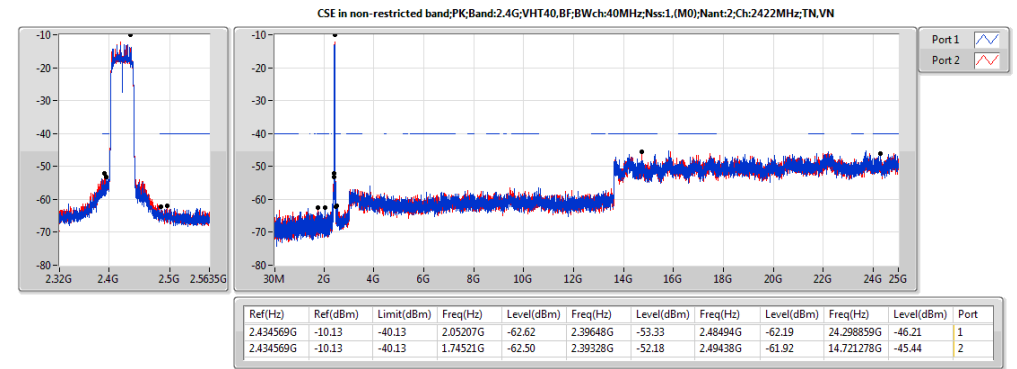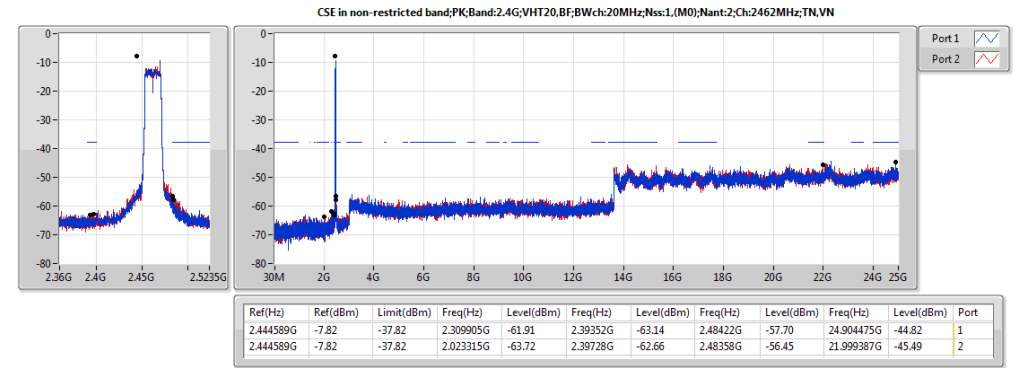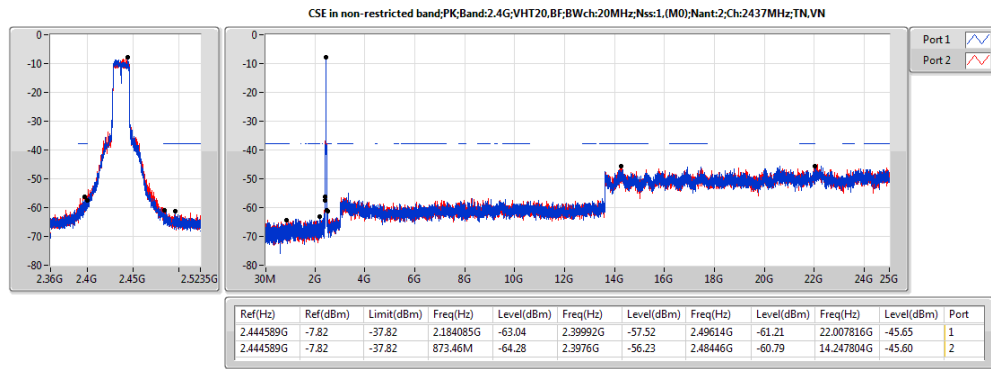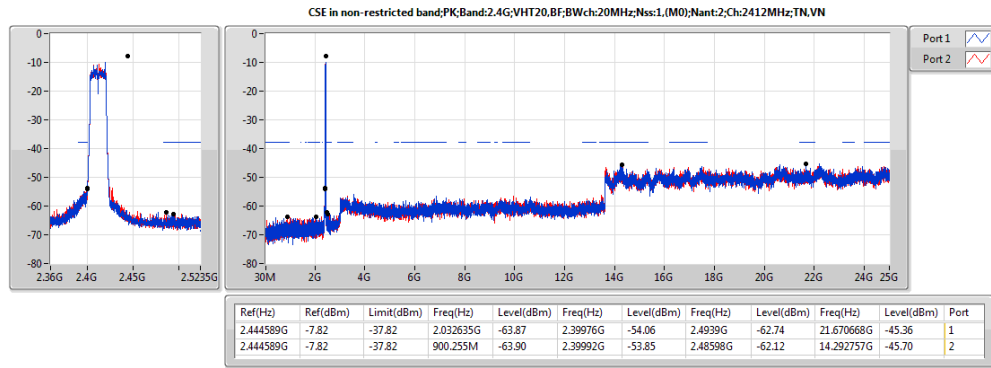

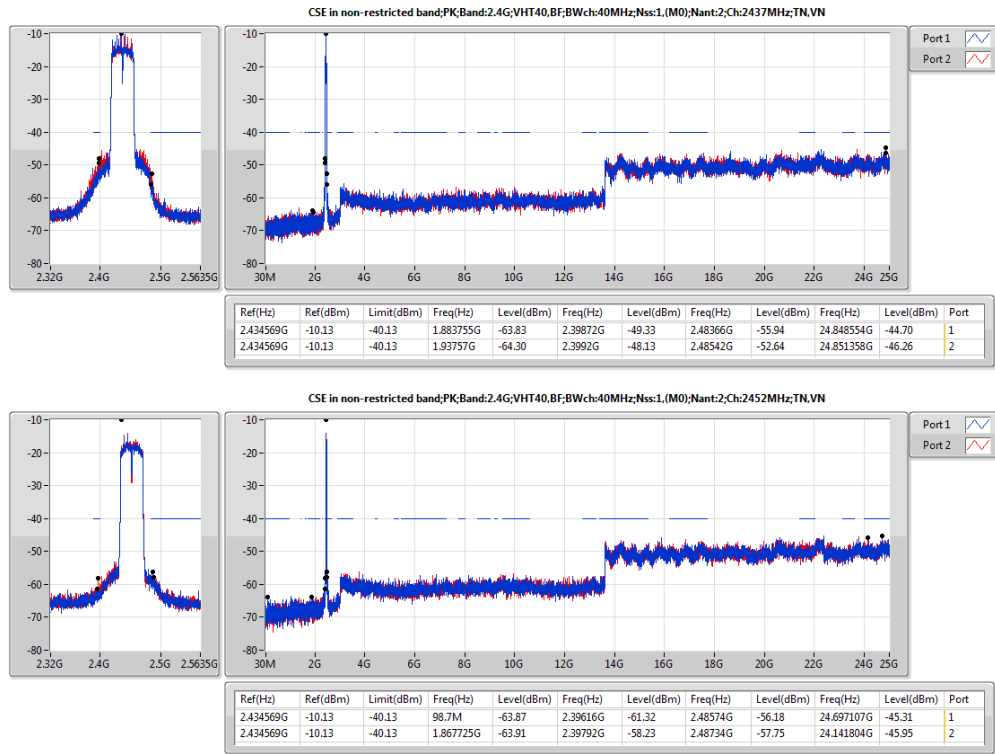

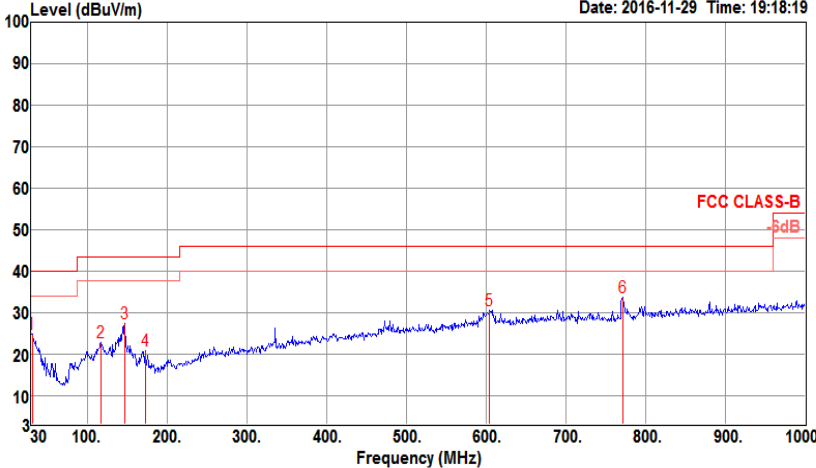

RSE below 1GHz Result																																																																																																												
Operating Mode	2				Polarization				Horizontal																																																																																																			
Operating Function	Normal Link																																																																																																											
Level (dBuV/m) Date: 2016-11-29 Time: 19:18:19 																																																																																																												
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>CableAntenna</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.97</td><td>24.81</td><td>40.00</td><td>-15.19</td><td>32.05</td><td>0.62</td><td>25.13</td><td>32.99</td><td>100</td><td>294 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>117.30</td><td>22.77</td><td>43.50</td><td>-20.73</td><td>34.95</td><td>1.22</td><td>19.02</td><td>32.42</td><td>300</td><td>164 Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>147.37</td><td>27.45</td><td>43.50</td><td>-16.05</td><td>40.94</td><td>1.37</td><td>17.52</td><td>32.38</td><td>200</td><td>25 Peak</td><td>HORIZONTAL</td></tr><tr><td>4</td><td>172.59</td><td>20.63</td><td>43.50</td><td>-22.87</td><td>35.02</td><td>1.49</td><td>16.48</td><td>32.36</td><td>150</td><td>123 Peak</td><td>HORIZONTAL</td></tr><tr><td>5</td><td>604.24</td><td>30.56</td><td>46.00</td><td>-15.44</td><td>34.68</td><td>2.83</td><td>25.46</td><td>32.41</td><td>200</td><td>277 Peak</td><td>HORIZONTAL</td></tr><tr><td>6</td><td>771.08</td><td>33.76</td><td>46.00</td><td>-12.24</td><td>36.19</td><td>3.23</td><td>26.58</td><td>32.24</td><td>125</td><td>270 Peak</td><td>HORIZONTAL</td></tr></table>														Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		1	30.97	24.81	40.00	-15.19	32.05	0.62	25.13	32.99	100	294 Peak	HORIZONTAL	2	117.30	22.77	43.50	-20.73	34.95	1.22	19.02	32.42	300	164 Peak	HORIZONTAL	3	147.37	27.45	43.50	-16.05	40.94	1.37	17.52	32.38	200	25 Peak	HORIZONTAL	4	172.59	20.63	43.50	-22.87	35.02	1.49	16.48	32.36	150	123 Peak	HORIZONTAL	5	604.24	30.56	46.00	-15.44	34.68	2.83	25.46	32.41	200	277 Peak	HORIZONTAL	6	771.08	33.76	46.00	-12.24	36.19	3.23	26.58	32.24	125	270 Peak	HORIZONTAL
	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg																																																																																																		
1	30.97	24.81	40.00	-15.19	32.05	0.62	25.13	32.99	100	294 Peak	HORIZONTAL																																																																																																	
2	117.30	22.77	43.50	-20.73	34.95	1.22	19.02	32.42	300	164 Peak	HORIZONTAL																																																																																																	
3	147.37	27.45	43.50	-16.05	40.94	1.37	17.52	32.38	200	25 Peak	HORIZONTAL																																																																																																	
4	172.59	20.63	43.50	-22.87	35.02	1.49	16.48	32.36	150	123 Peak	HORIZONTAL																																																																																																	
5	604.24	30.56	46.00	-15.44	34.68	2.83	25.46	32.41	200	277 Peak	HORIZONTAL																																																																																																	
6	771.08	33.76	46.00	-12.24	36.19	3.23	26.58	32.24	125	270 Peak	HORIZONTAL																																																																																																	
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)																																																																																																												

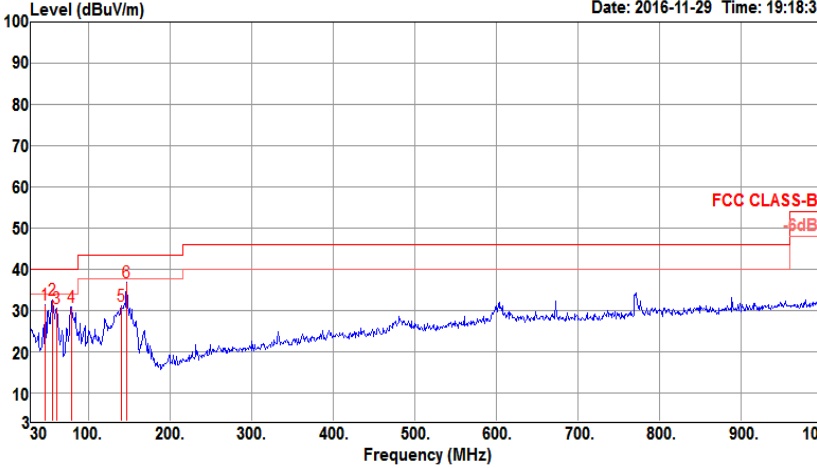RSE below 1GHz Result												
Operating Mode	2				Power Phase				Vertical			
Operating Function	Normal Link											
Level (dBuV/m) Date: 2016-11-29 Time: 19:18:36 												
	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	47.46	31.32	40.00	-8.68	46.99	0.77	16.00	32.44	100	161 Peak	VERTICAL	
2	56.19	32.54	40.00	-7.46	49.96	0.83	14.14	32.39	100	356 Peak	VERTICAL	
3	62.01	30.42	40.00	-9.58	48.40	0.88	13.54	32.40	125	359 Peak	VERTICAL	
4	79.47	30.81	40.00	-9.19	48.68	1.00	13.56	32.43	100	156 Peak	VERTICAL	
5	140.58	31.11	43.50	-12.39	44.01	1.33	18.16	32.39	100	284 Peak	VERTICAL	
6	147.37	36.80	43.50	-6.70	50.29	1.37	17.52	32.38	125	169 Peak	VERTICAL	
Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)												



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
2.4G;VHT40;Nss1,(M0);Ntx2;2422;TX	Pass	AV	2.39G	53.89	54.00	-0.11	31.92	3	V	213	1.50	-

