




Test Date	2015/03/24	Temp./Hum.	25°C/58%
Mode	802.11g	Frequency	TX 2437MHz
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)			2

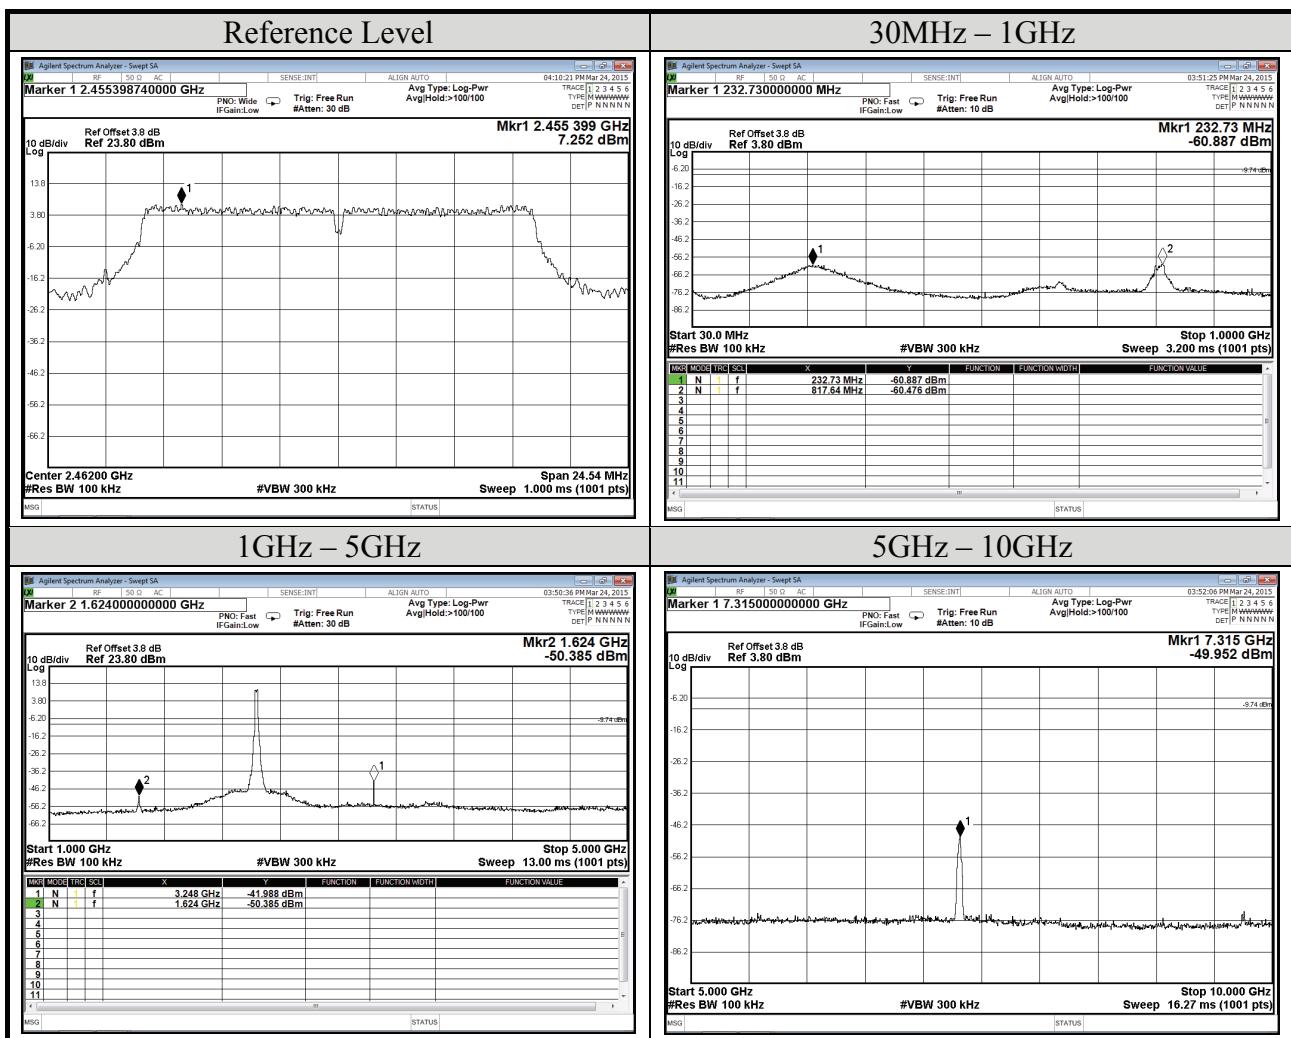


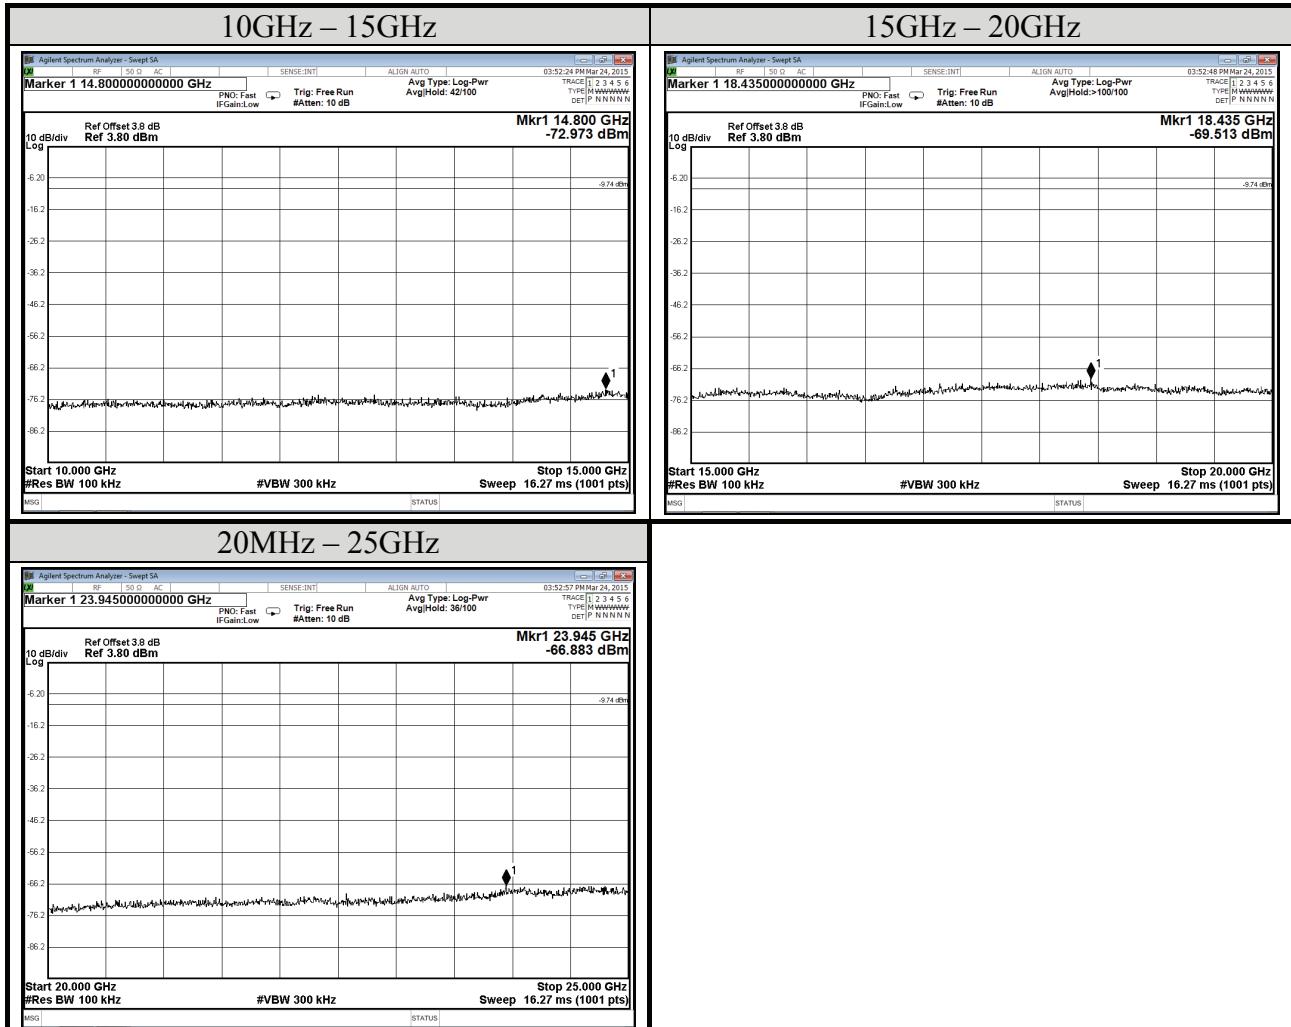

Note: All results have been included cable loss and simultaneous factor.


Test Date	2015/03/24	Temp./Hum.	25°C/58%
Mode	802.11g	Frequency	TX 2462MHz
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)			2

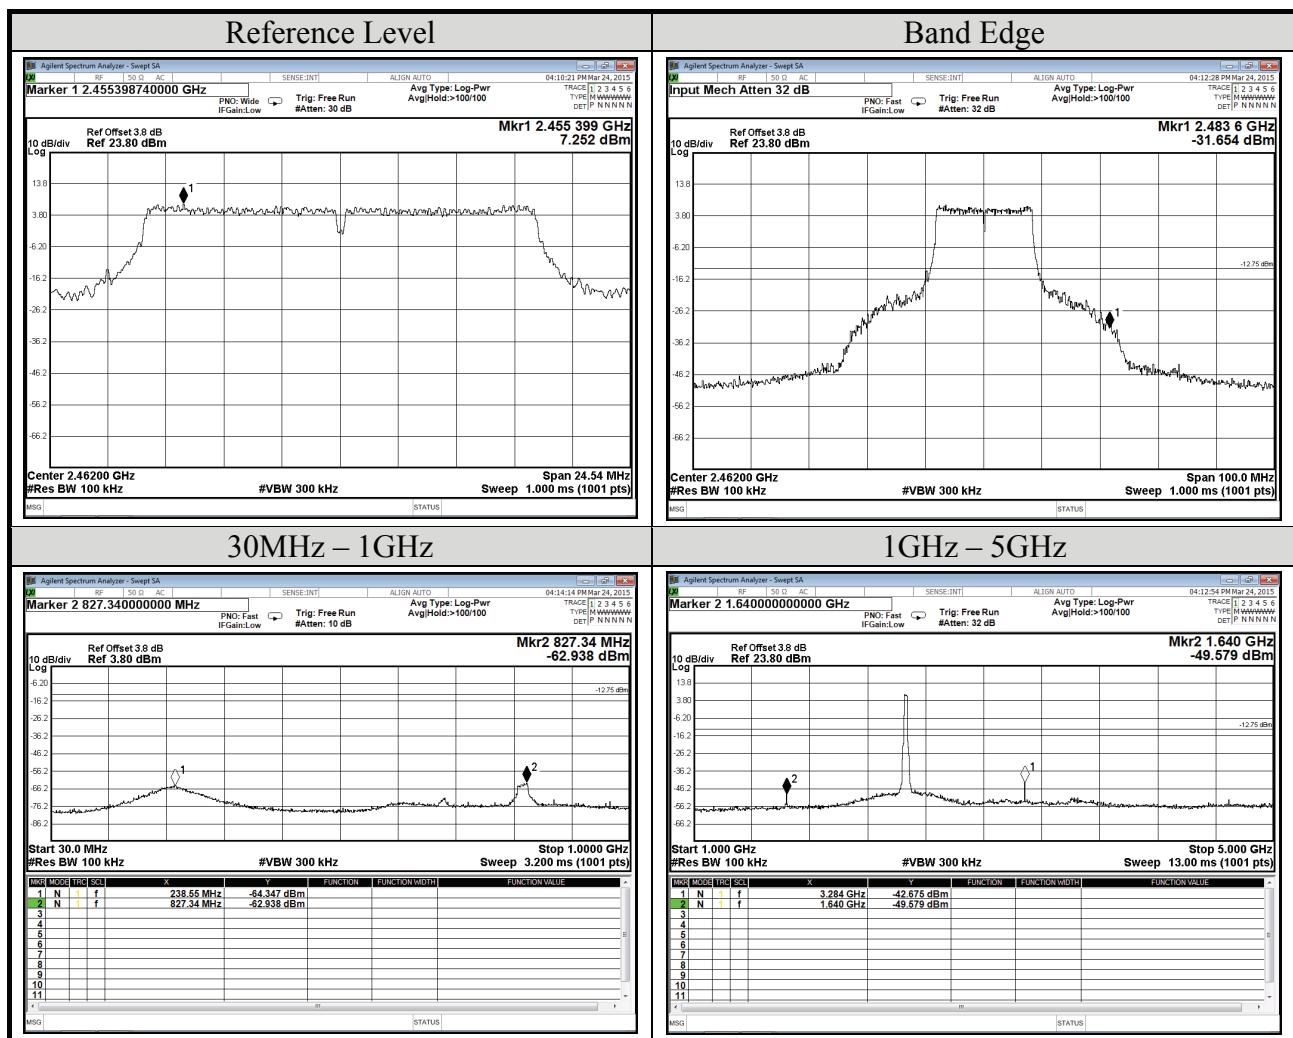


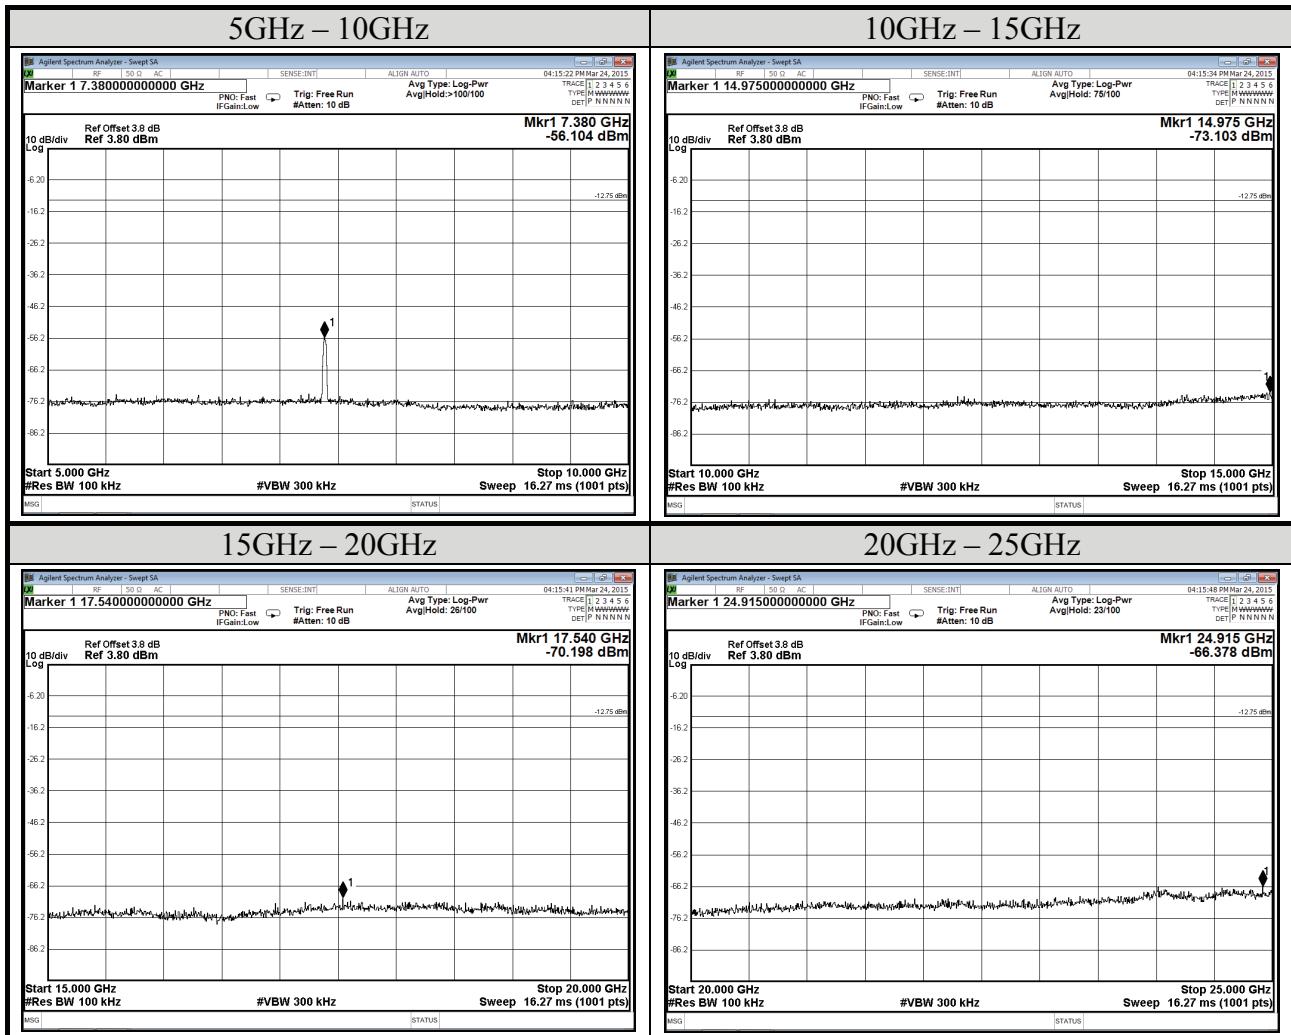

Note: All results have been included cable loss and simultaneous factor.


Test Date	2015/03/24	Temp./Hum.	25°C/58%
Mode	802.11n-HT20	Frequency	TX 2412MHz
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)			2

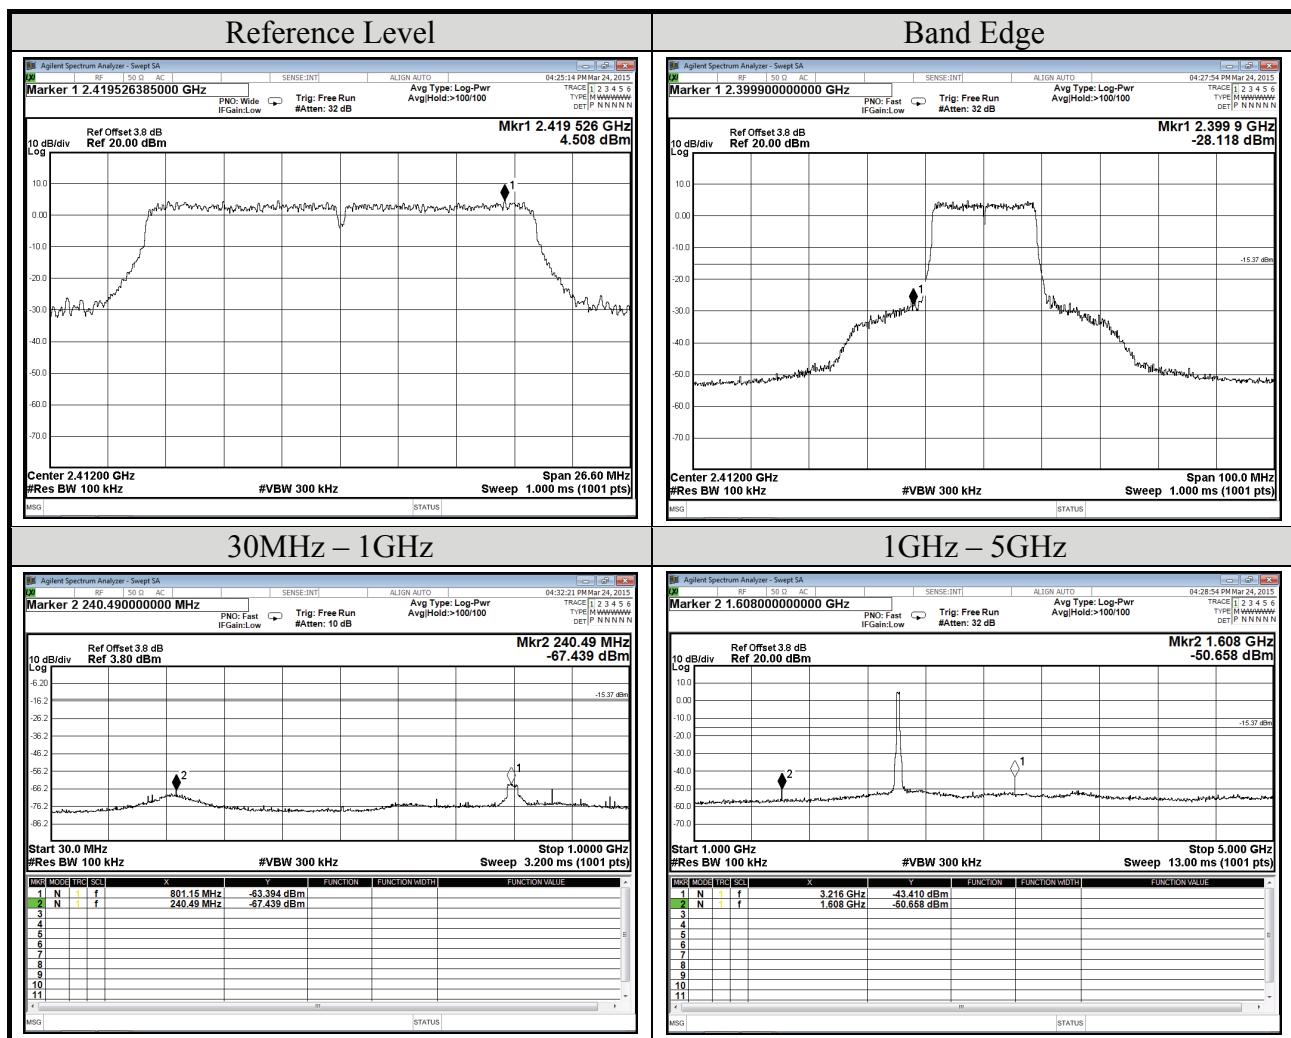


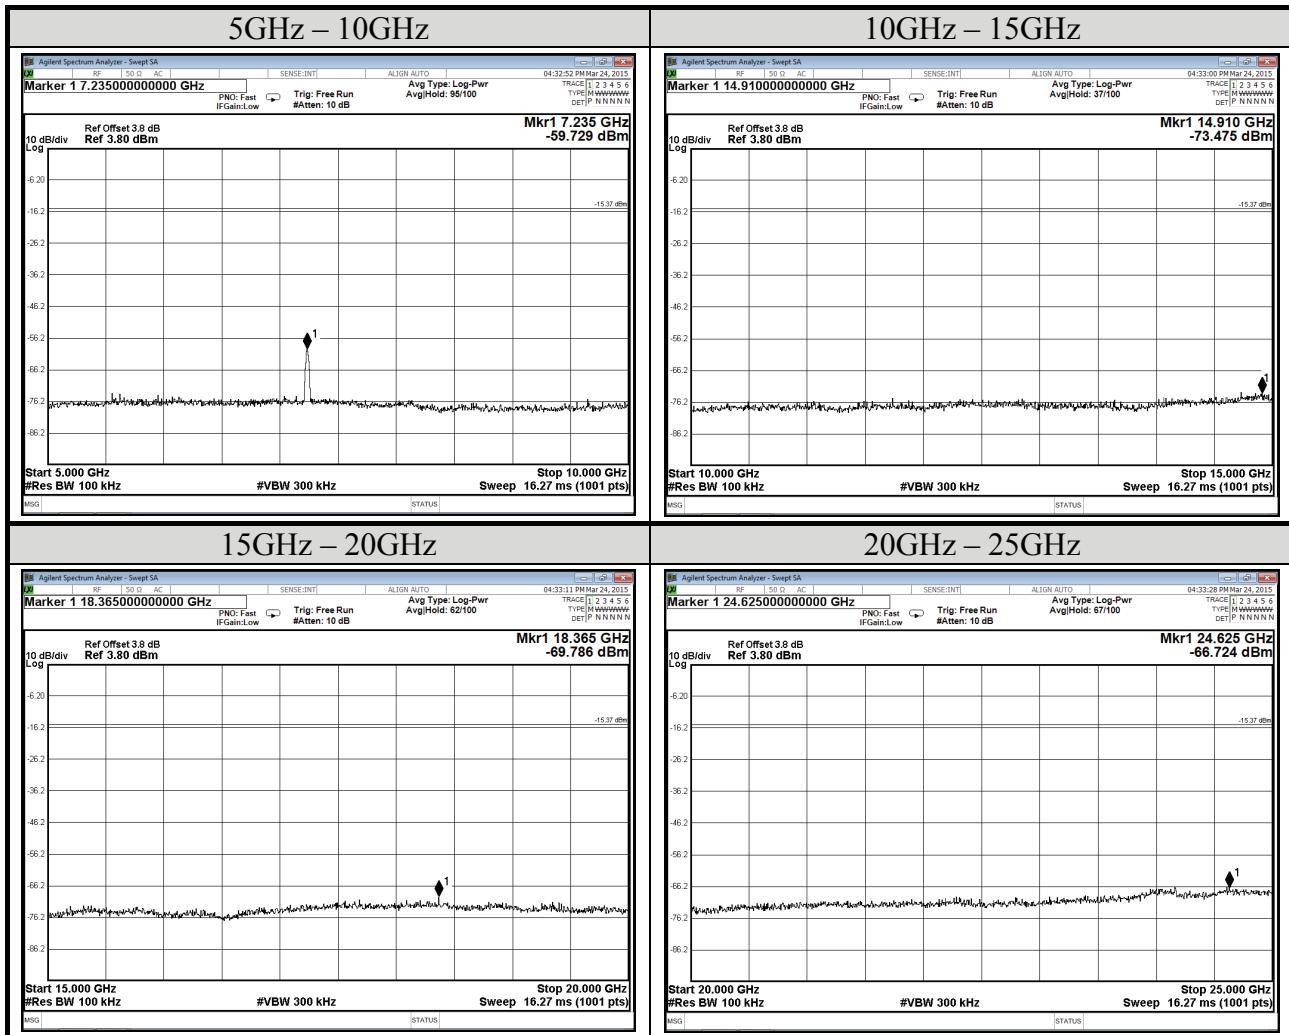

Note: All results have been included cable loss and simultaneous factor.


Test Date	2015/03/24	Temp./Hum.	25°C/58%
Mode	802.11n-HT20	Frequency	TX 2437MHz
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)			2

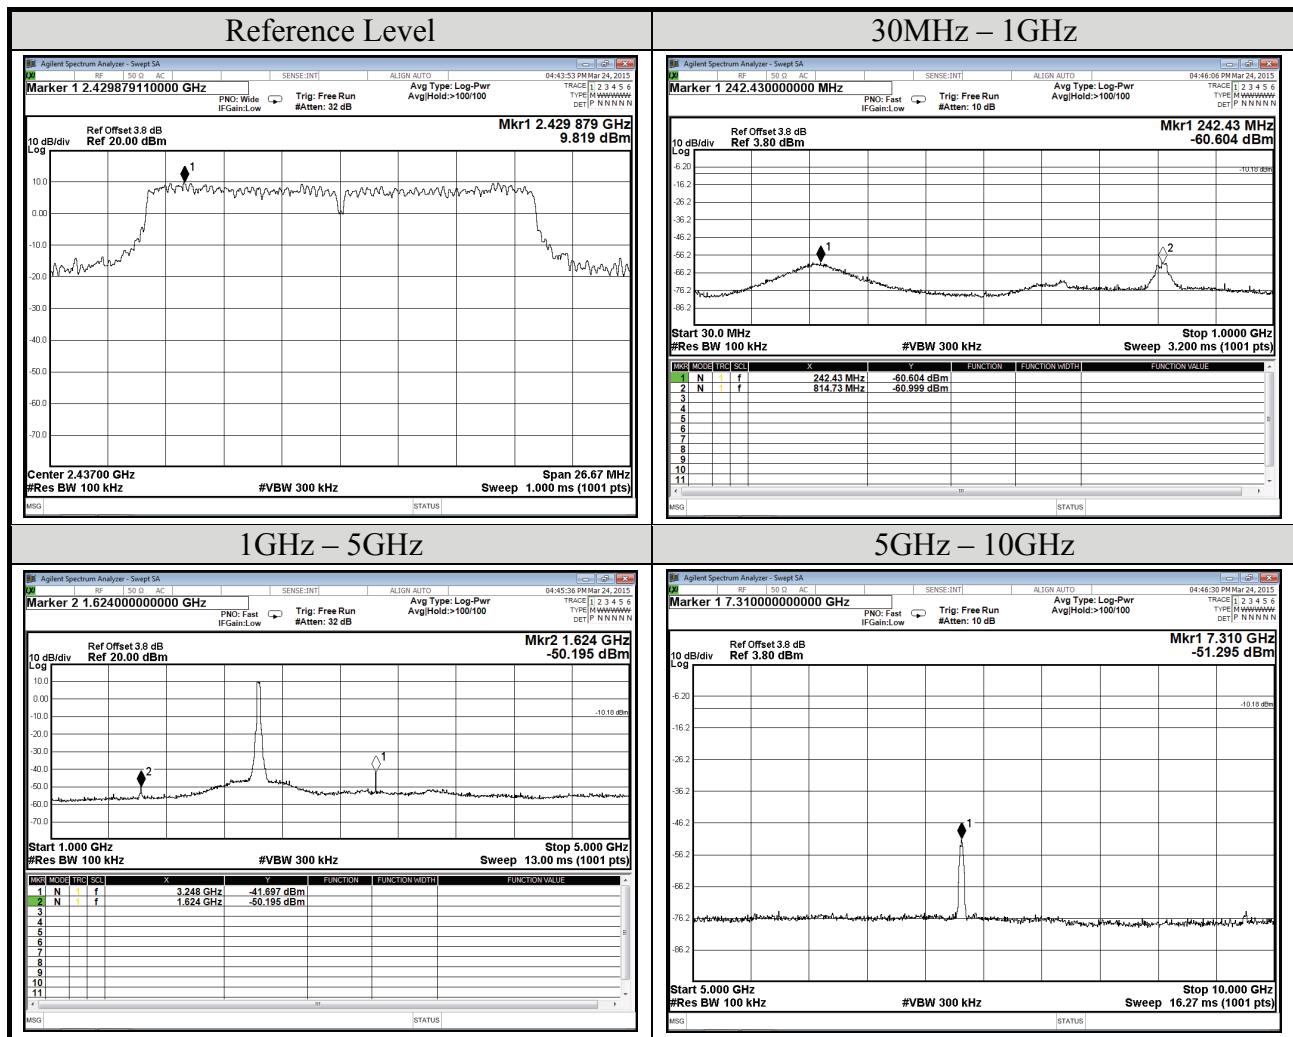

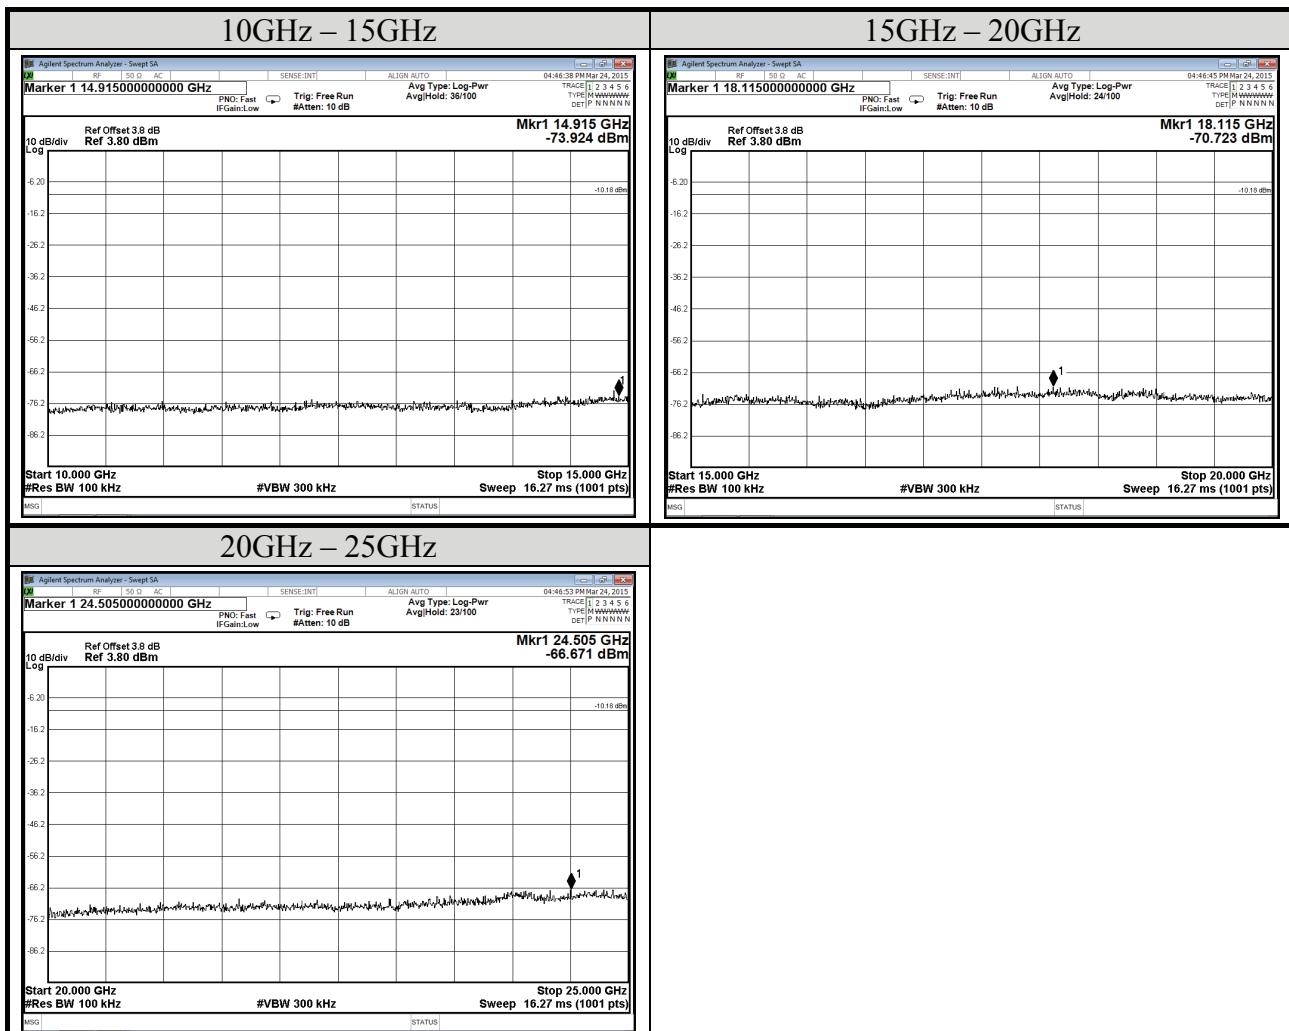

Note: All results have been included cable loss and simultaneous factor.


Test Date	2015/03/24	Temp./Hum.	25°C/58%
Mode	802.11n-HT20	Frequency	TX 2462MHz
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)			2

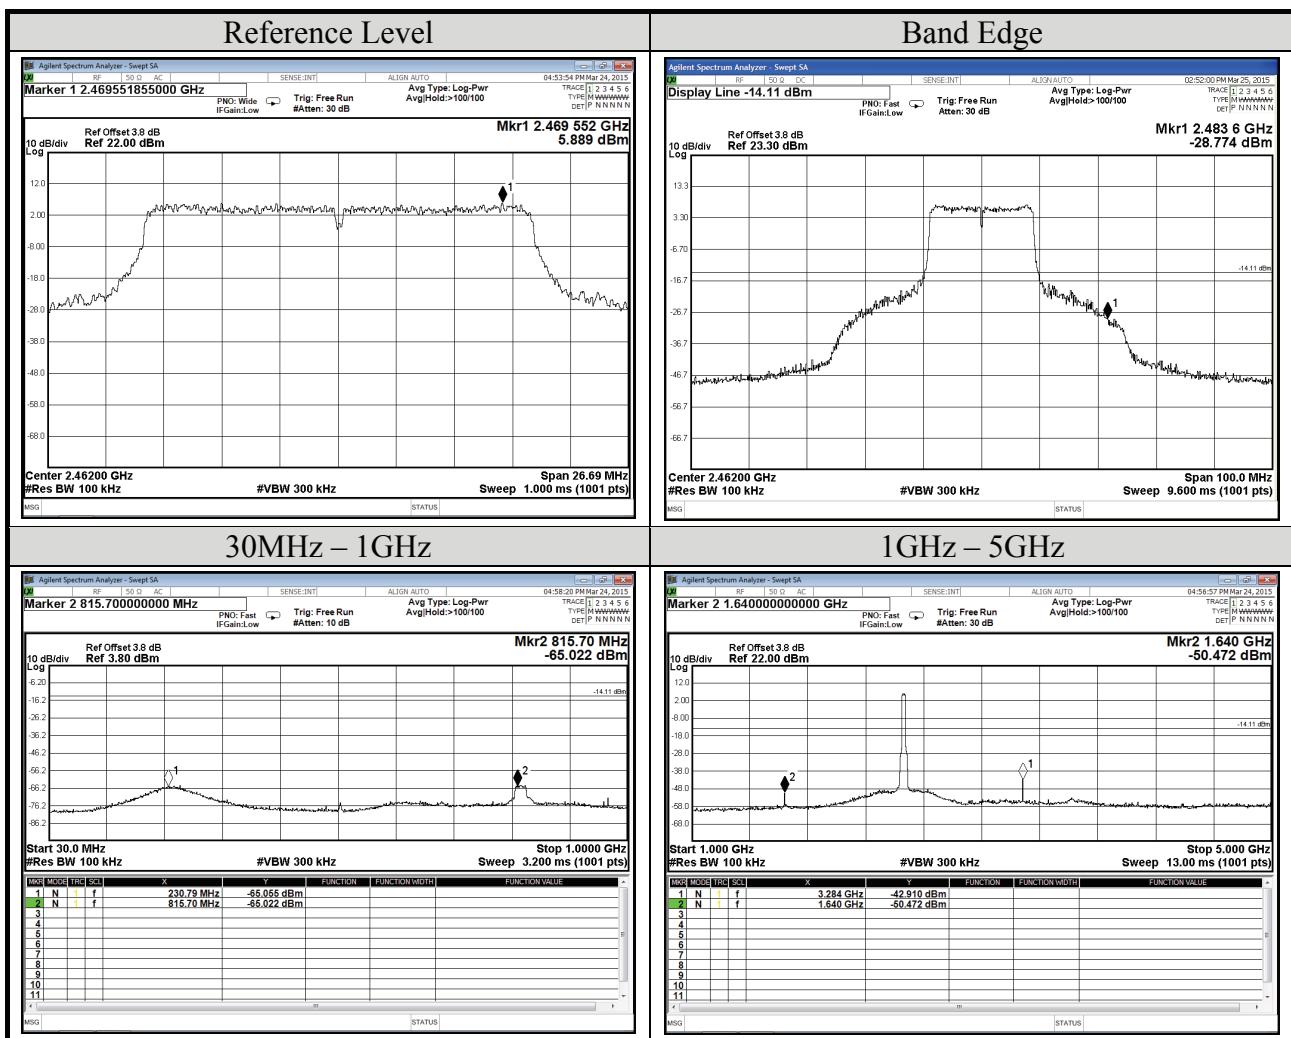




Note: All results have been included cable loss and simultaneous factor.


Test Date	2015/03/24	Temp./Hum.	25°C/58%
Mode	802.11n-HT40	Frequency	TX 2422MHz
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)			2

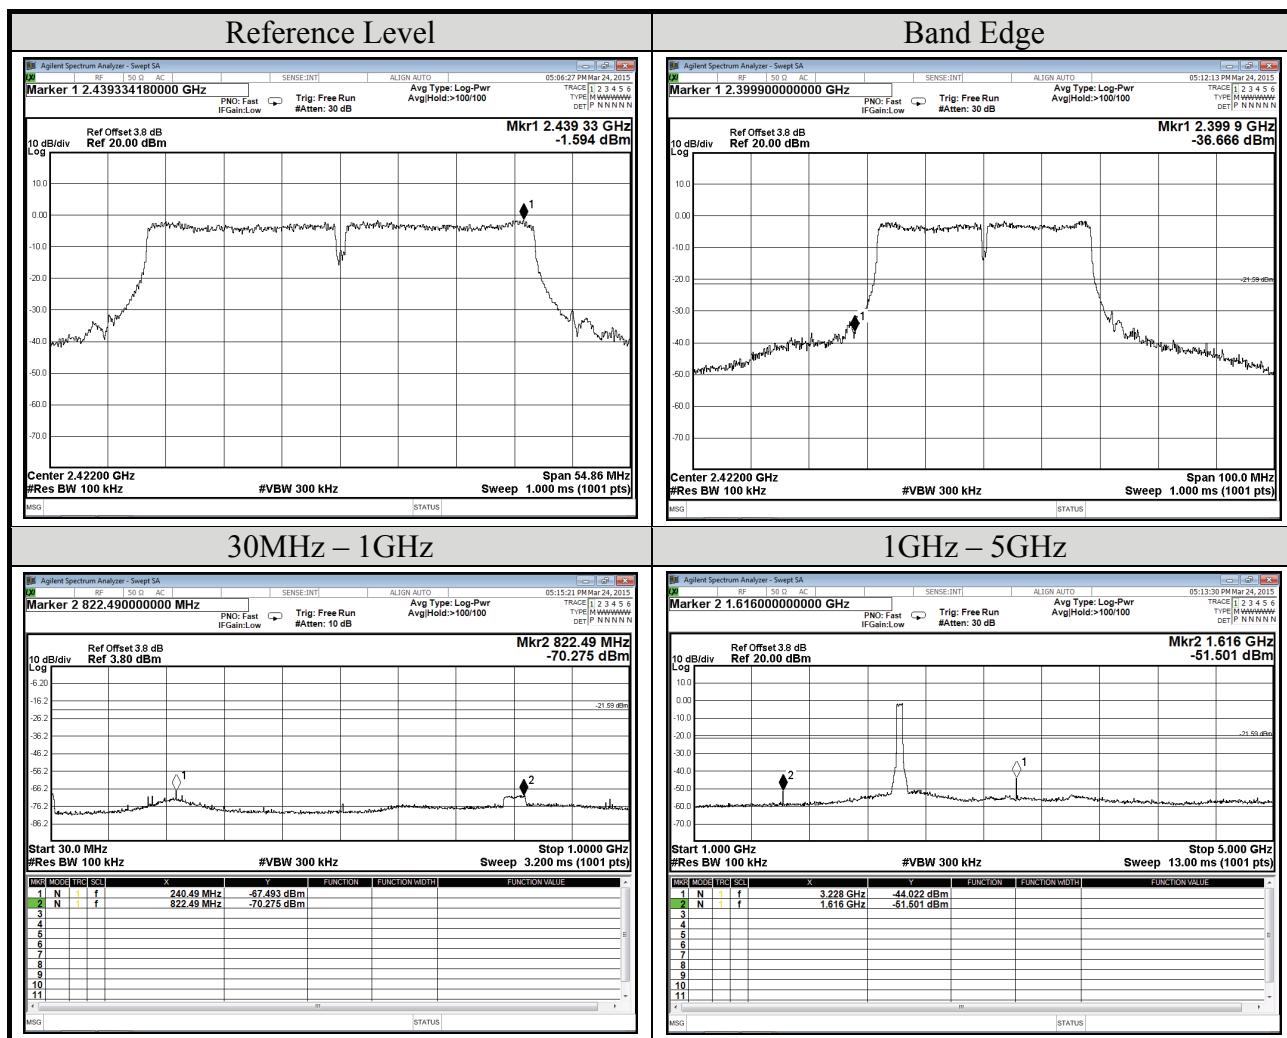


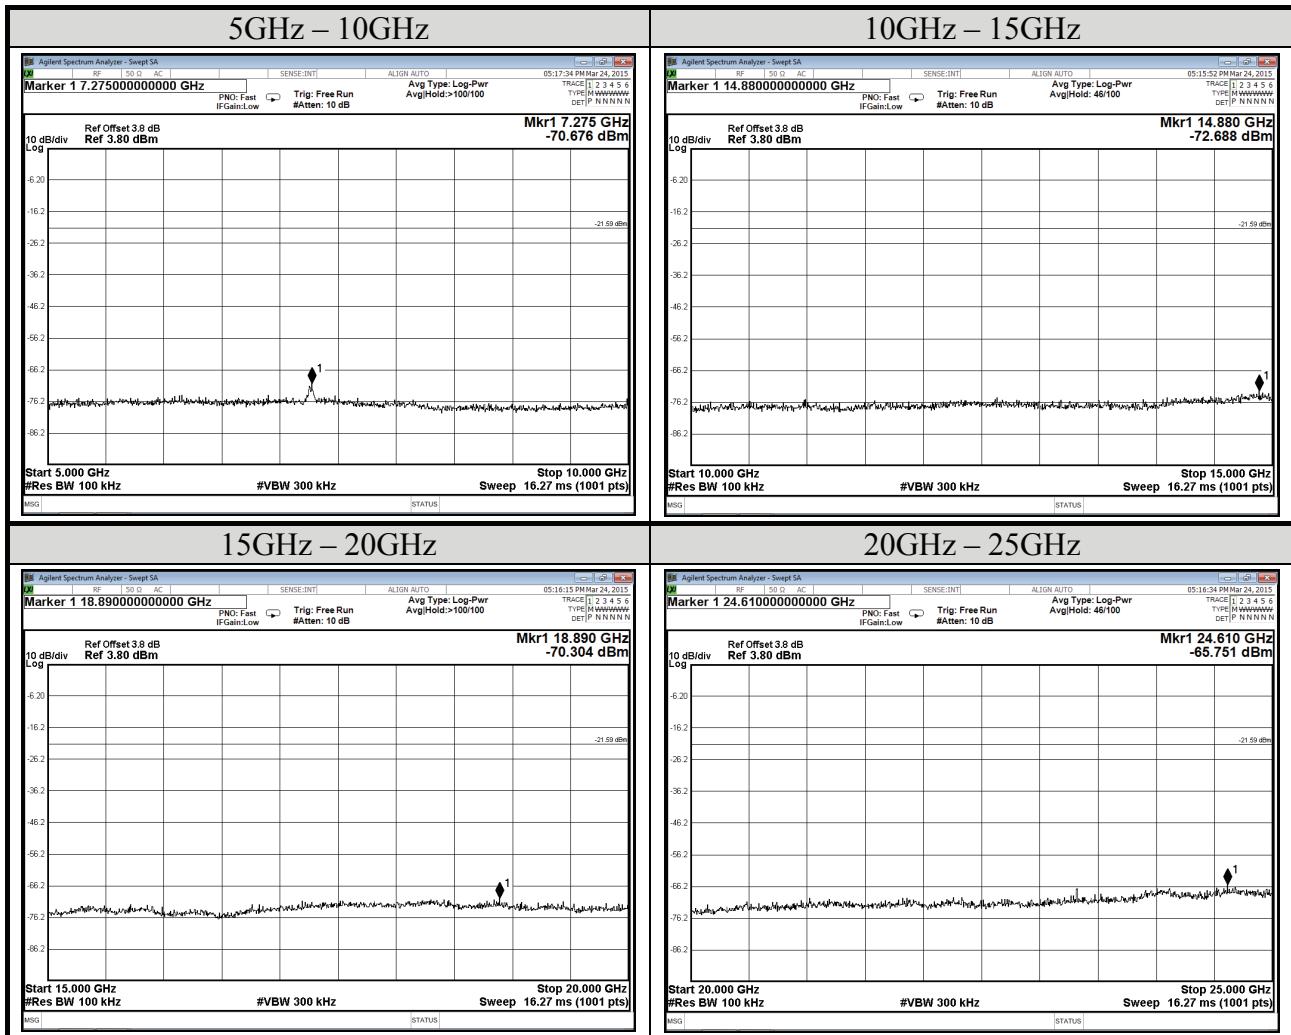


Note: All results have been included cable loss and simultaneous factor.


Test Date	2015/03/24	Temp./Hum.	25°C/58%
Mode	802.11n-HT40	Frequency	TX 2437MHz
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)			2

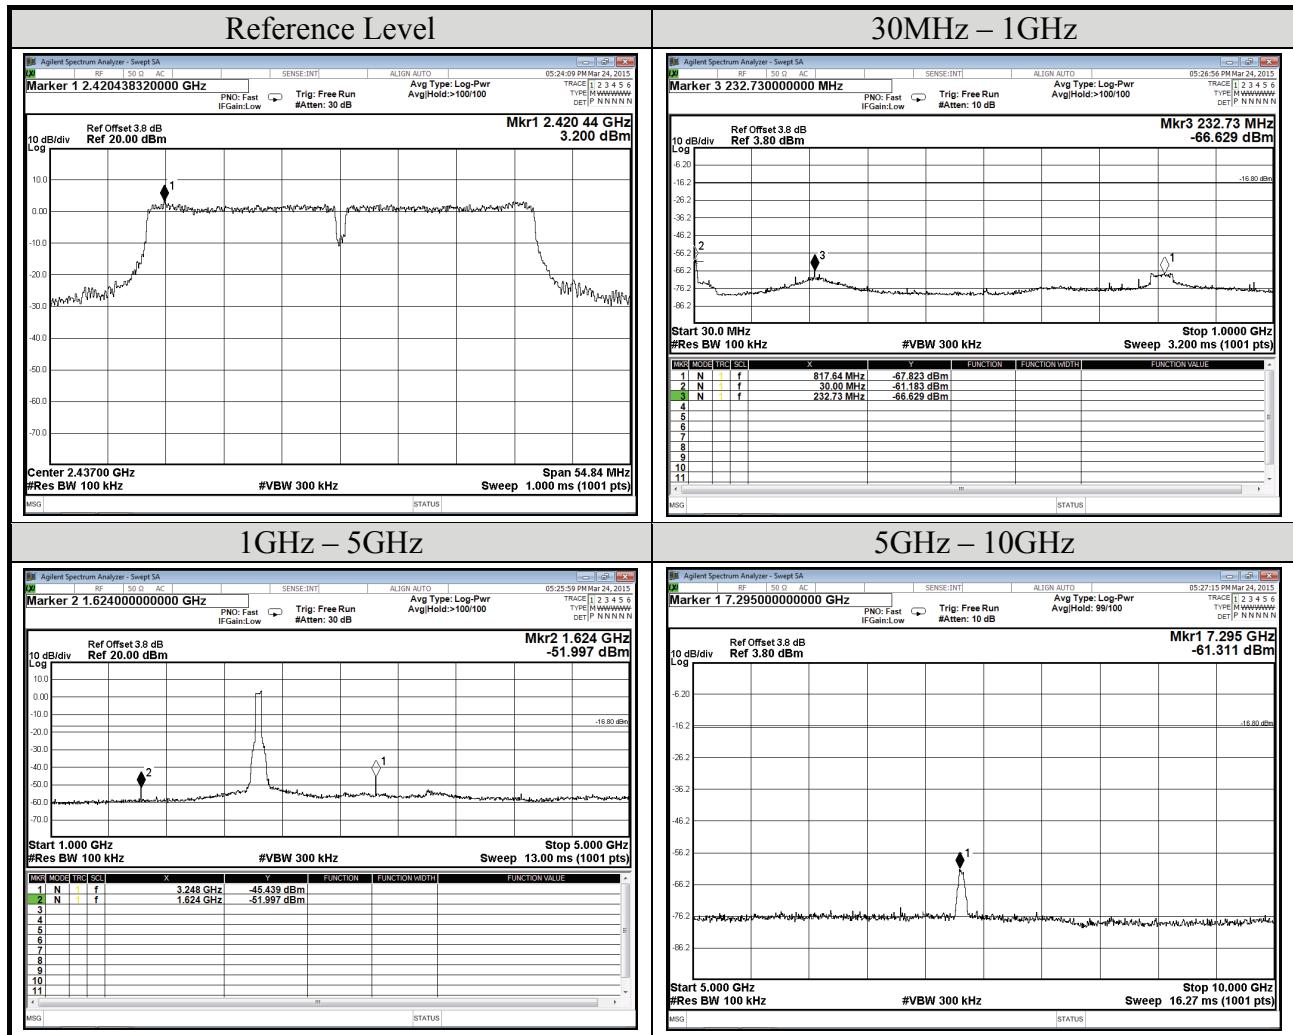

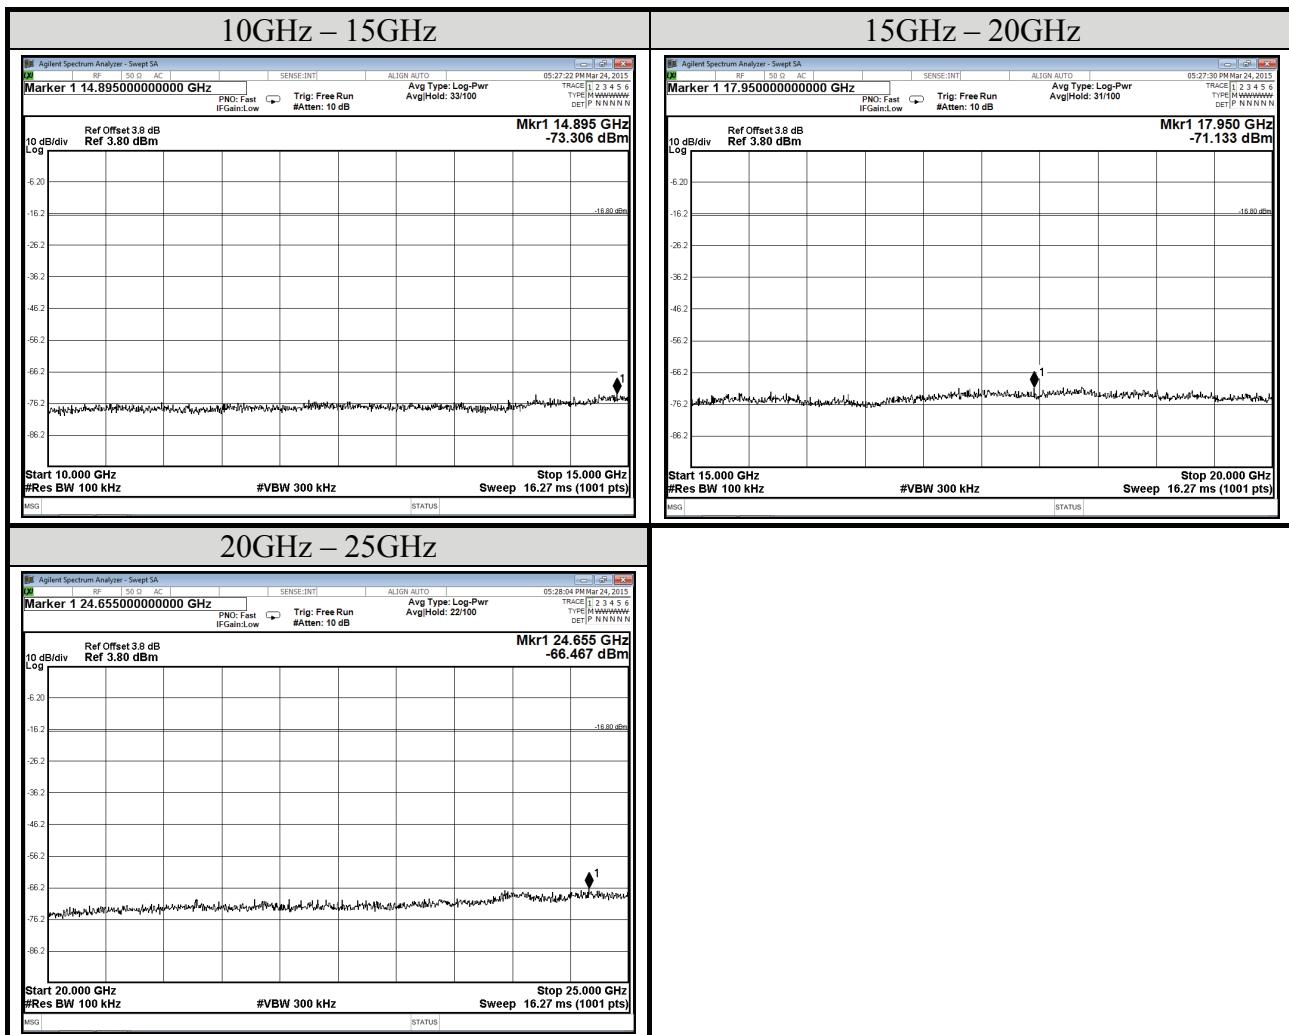

Test Date	2015/03/24	Temp./Hum.	25°C/58%
Mode	802.11n-HT40	Frequency	TX 2452MHz
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)			2

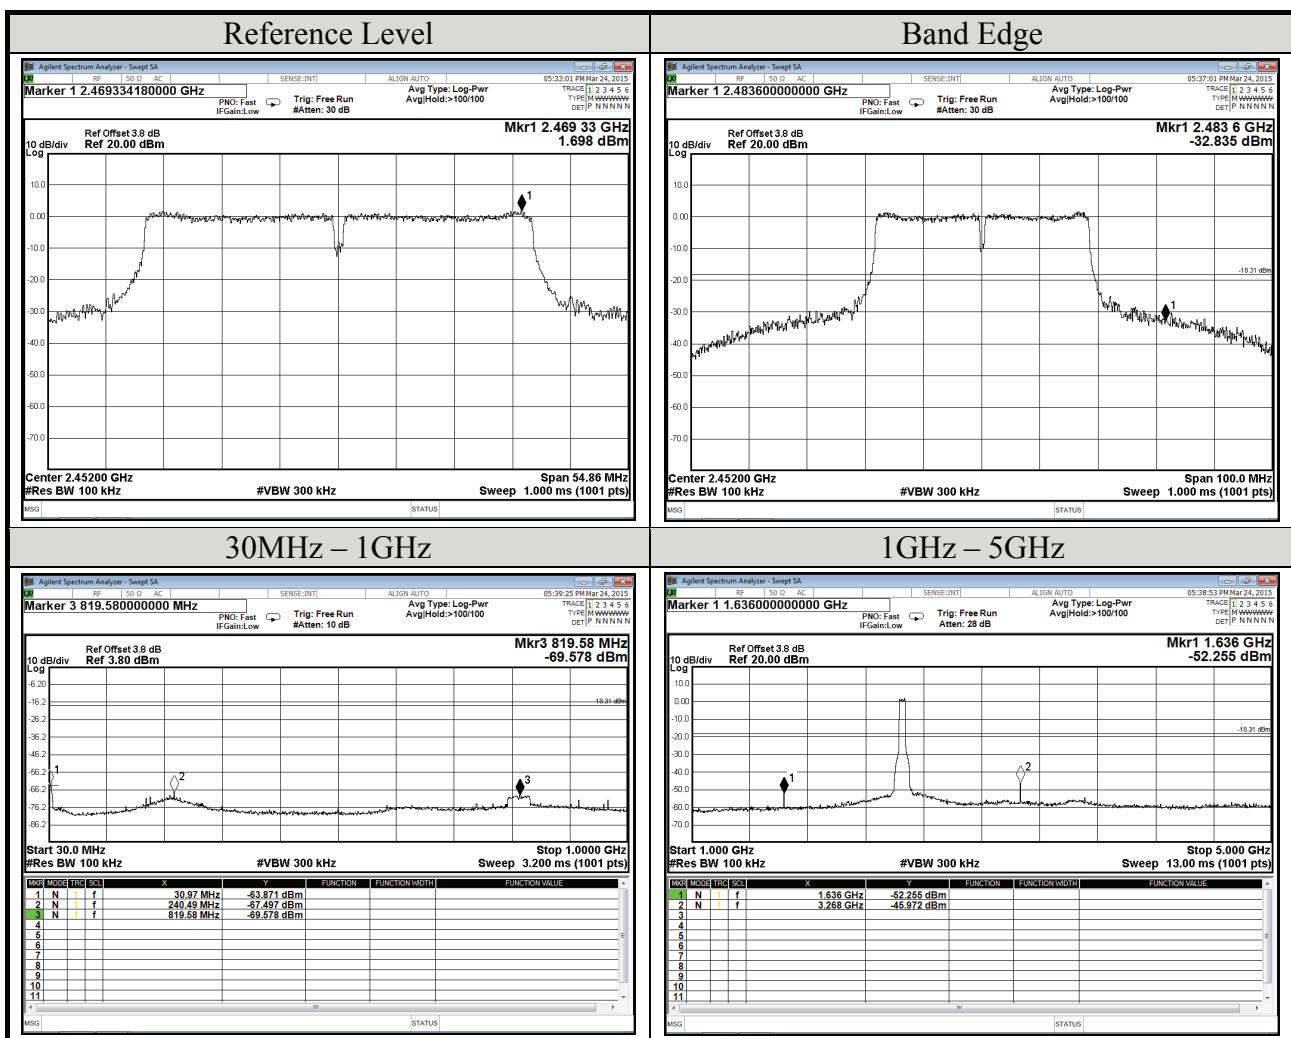

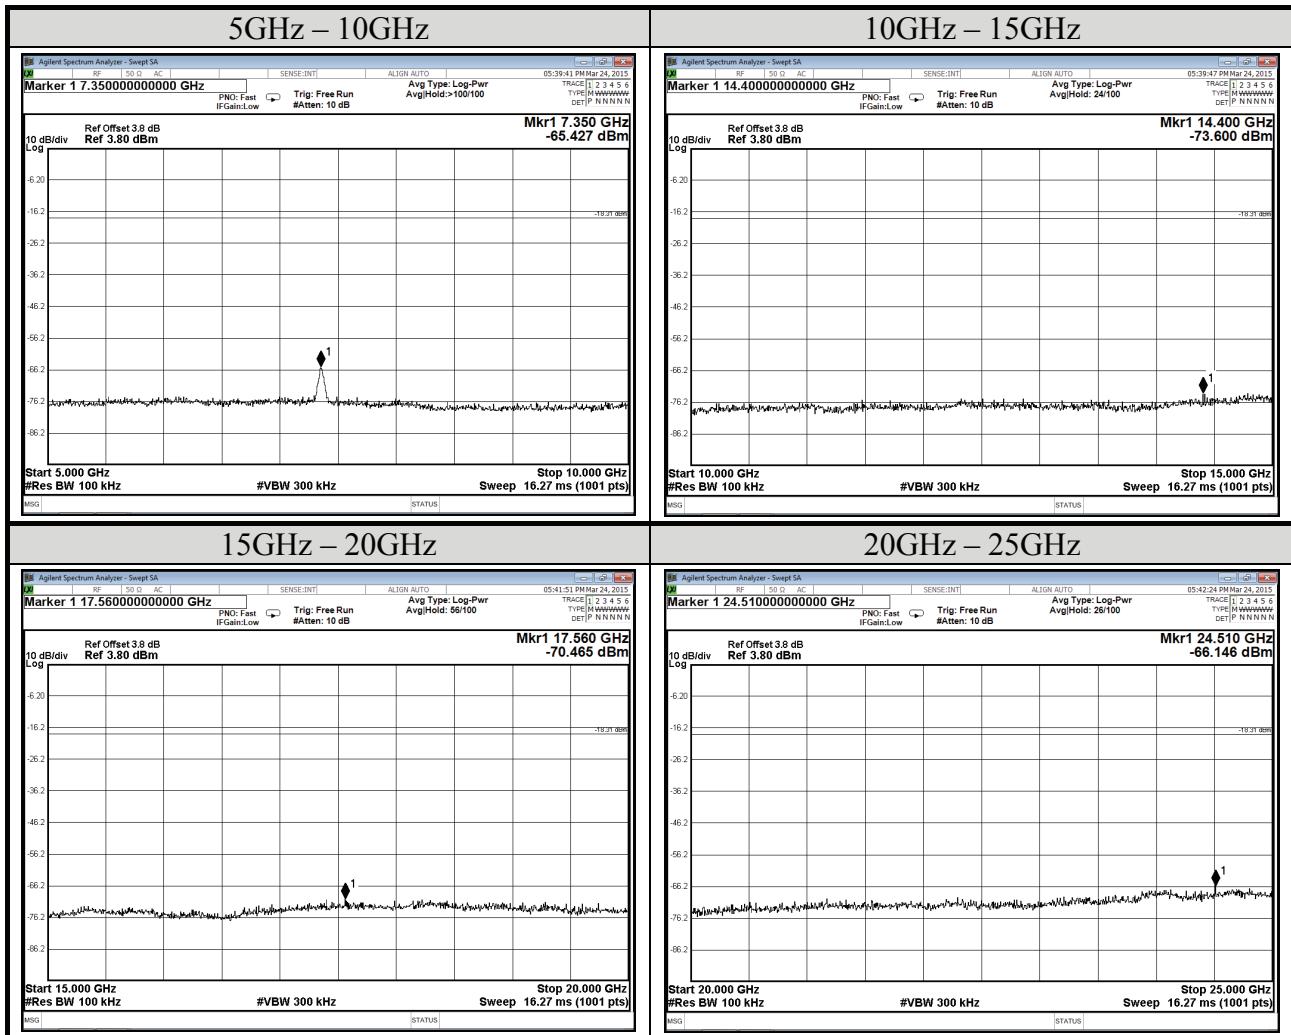

Note: All results have been included cable loss and simultaneous factor.

A.4 POWER SPECTRAL DENSITY


Test Date	2015/03/24	Temp./Hum.	25°C/58%
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)	2		

Test Date	2015/03/27	Temp./Hum.	25°C/54%
Cable Loss	0.8dB	Test Voltage	AC 120V, 60Hz
Simultaneous 10 log(n) (Note: "n" is antenna number)	2		

A.4.1 Power Spectral Density Result


Modulation Type	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11b	2412	-5.794	< 8 dBm
	2437	-2.451	
	2462	-3.754	
802.11g	2412	-7.666	< 8 dBm
	2437	-3.163	
	2462	-9.289	
802.11n-HT20	2412	-8.019	< 8 dBm
	2437	-3.994	
	2462	-7.060	
802.11n-HT40	2422	-12.399	< 8 dBm
	2437	-8.010	
	2452	-8.444	

A.4.2 Measurement Plots




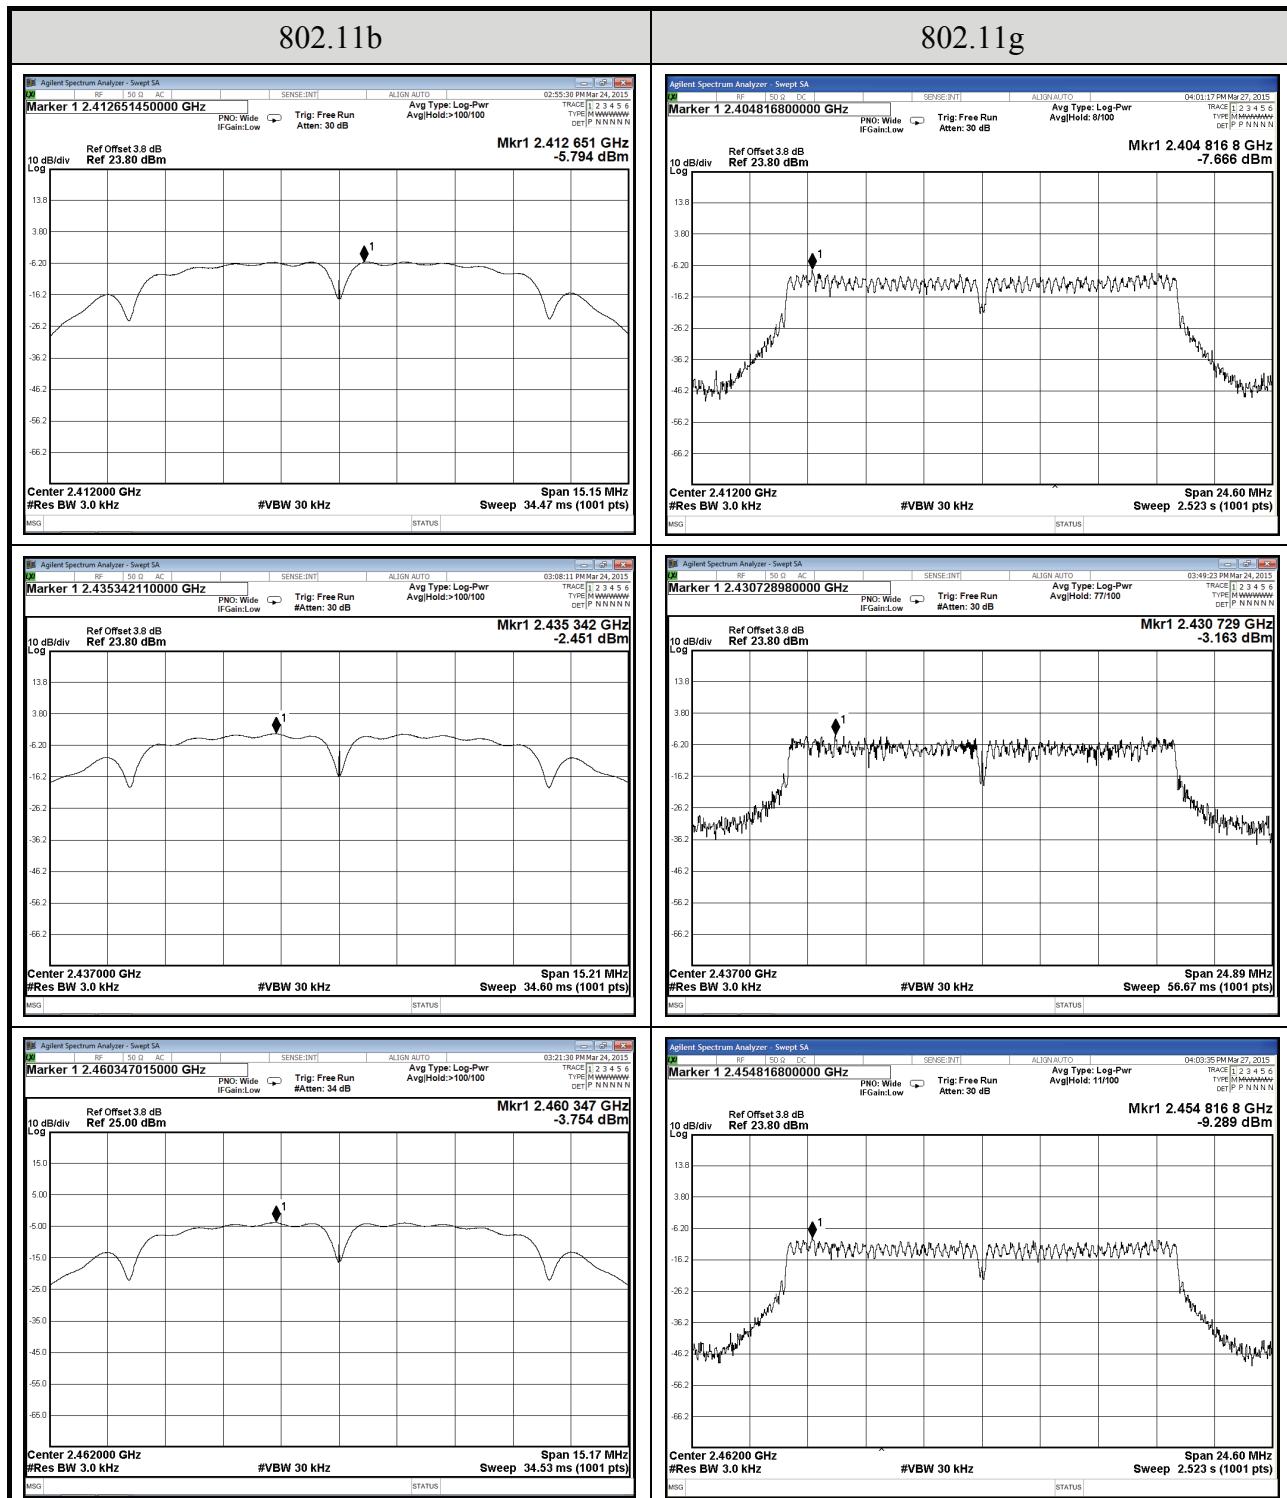


Note: All results have been included cable loss and simultaneous factor.

802.11n-HT20

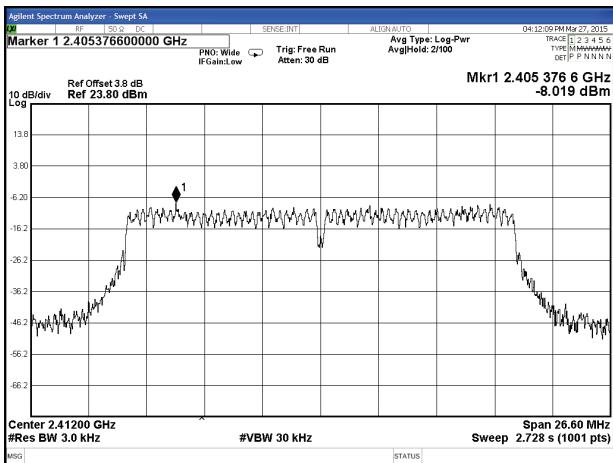

802.11n-HT40

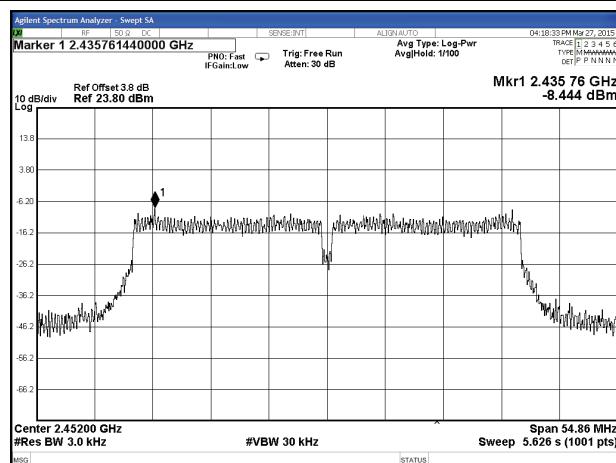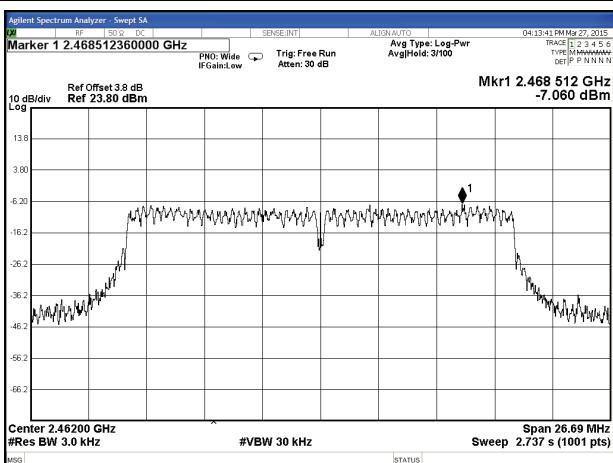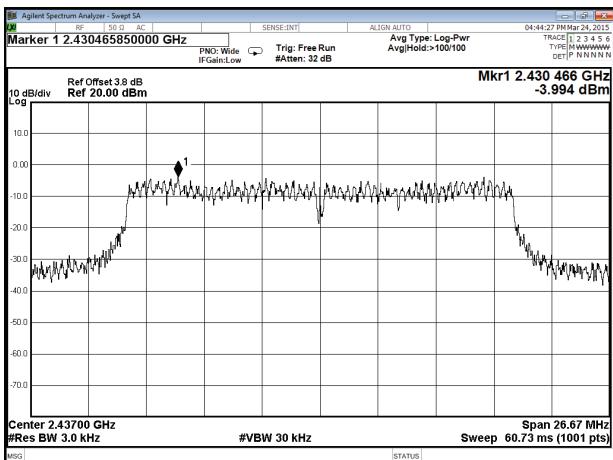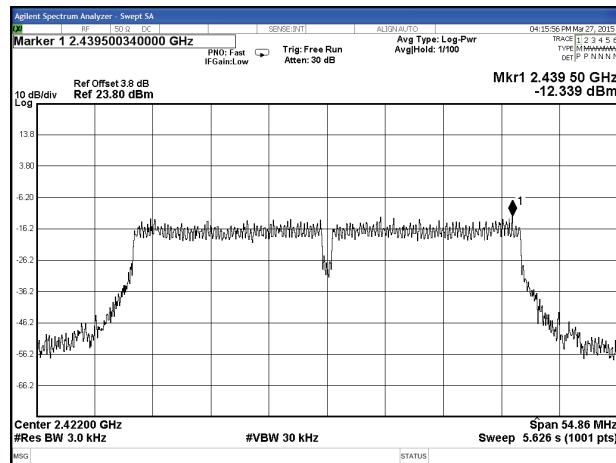

Note: All results have been included cable loss and simultaneous factor.