

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

TP-LINK TECHNOLOGIES CO., LTD.

AC600 Wireless Dual Band USB Adapter

Model No.: T2U

FCC ID: TE7T2U

Prepared for : TP-LINK TECHNOLOGIES CO., LTD.

Building 24(floors 1,3,4,5) and 28 (floors1-4) Central Science
and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F14164

Date of Test : Mar.24~Apr.26, 2014

Date of Report : May.19, 2014

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Information	2-2
2.3. Tested Supporting System Details	2-3
2.4. Block Diagram of Test Setup	2-3
2.5. Test Facility	2-4
2.6. Measurement Uncertainty (95% confidence levels, k=2)	2-4
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Power Line Conducted Emission Test Limits	3-1
3.4. Configuration of EUT on Test	3-2
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup	4-2
4.3. Radiated Emission Limit	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-4
4.7. Radiated Emission Test Results	4-4
5. CONDUCTED SPURIOUS EMISSIONS	5-1
5.1. Test Equipment	5-1
5.2. Limit	5-1
5.3. Test Procedure	5-1
5.4. Test result	5-1
6. BAND EDGE COMPLIANCE TEST	6-1
6.1. Test Equipment	6-1
6.2. Limit	6-1
6.3. Test Produce	6-1
6.4. Test Results	6-1
7. 6dB Bandwidth Test	7-1
7.1. Test Equipment	7-1
7.2. Limit	7-1
7.3. Test Procedure	7-1
7.4. Test Results	7-1
8. OUTPUT POWER TEST	8-1
8.1. Test Equipment	8-1
8.2. Limit (FCC Part 15C 15.247 b(3))	8-1
8.3. Test Procedure	8-1
8.4. Test Results	8-2
9. POWER SPECTRAL DENSITY TEST	9-1
9.1. Test Equipment	9-1

9.2.	Limit	9-1
9.3.	Test Procedure	9-1
9.4.	Test Results	9-2
10.	ANTENNA REQUIREMENT	10-1
10.1.	STANDARD APPLICABLE	10-1
10.2.	ANTENNA CONNECTED CONSTRUCTION	10-1
11.	DEVIATION TO TEST SPECIFICATIONS	11-1
12.	PHOTOGRAPH OF TEST	12-1
12.1.	Photos of Power Line Conducted Emission Test	12-1
12.2.	Photos of Radiated Emission Test	12-2

TEST REPORT CERTIFICATION

Applicant : TP-LINK TECHNOLOGIES CO., LTD.
 Manufacturer : TP-LINK TECHNOLOGIES CO., LTD.
 EUT Description : AC600 Wireless Dual Band USB Adapter
 FCC ID : TE7T2U
 (A) MODEL NO. : T2U
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 5V From PC
 (D) TEST VOLTAGE : DC 5V From PC Input AC 120V/60Hz

Tested for comply with:
 FCC Rules and Regulations Part 15 Subpart C: 2013

Test procedure used:
 ANSI C63.10:2009



The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Mar.24~ Apr.26, 2014 Report of date: May.19, 2014


Prepared by :  Reviewed by : 
 Sonia Lee / Assistant Sunny Lu / Assistant Manager



信華科技(深圳)有限公司
 Audix Technology (Shenzhen) Co., Ltd.

EMC 部門報告專用章

Stamp only for EMC Dept Report

Signature: 

Approved & Authorized Signer :

David Jin / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2009	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10: 2009	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	: AC600 Wireless Dual Band USB Adapter
Model Number	: T2U
FCC ID	: TE7T2U
Radio	: IEEE802.11 a/b/g/n/ac
Operation Frequency	: IEEE 802.11a: 5180MHz—5240MHz, 5260MHz—5320MHz, 5500MHz—5700MHz; 5745MHz—5825MHz IEEE 802.11ac VHT20: 5180MHz—5240MHz, 5260MHz—5320MHz, 5500MHz—5700MHz; 5745MHz—5825MHz IEEE 802.11ac VHT40: 5190MHz—5230MHz, 5270MHz—5310MHz, 5510MHz—5710MHz; 5755MHz—5795MHz IEEE 802.11ac VHT80: 5210MHz, 5290MHz, 5530MHz—5690MHz; 5775MHz IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE802.11nHT20: 2412MHz—2462MHz; 5180MHz—5240MHz, 5260MHz—5320MHz, 5500MHz—5700MHz; 5745MHz—5825MHz IEEE802.11nHT40: 2422MHz—2452MHz; 5190MHz—5230MHz, 5270MHz—5310MHz, 5510MHz—5670MHz; 5755MHz—5795MHz
Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11a/g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20, VHT40, VHT80: OFDM (16QAM, 64QAM, 256QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Antenna Assembly Gain	: Monopole Antenna, 2.4GHz: -1.35dBi(max) Band 1: 4.38dBi(max) Band 2: 4.37dBi(max) Band 3: 3.66dBi(max) Band 4: 2.89dBi(max)
Applicant	: TP-LINK TECHNOLOGIES CO., LTD. Building 24(floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Manufacturer	: TP-LINK TECHNOLOGIES CO., LTD. Building 24(floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

Date of Test : Mar.24~Apr.26, 2014

Date of Receipt : May.19, 2014

Sample Type : Prototype production

2.2.Test Information

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11n HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11n HT40	13.5	Low :CH1	2422
	13.5	Middle: CH4	2437
	13.5	High: CH7	2452

Note 1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.


Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11a	6	Low :CH149	5745
	6	Middle: CH157	5785
	6	High: CH165	5825
IEEE 802.11ac VHT20	6	Low :CH149	5745
	6	Middle: CH157	5785
	6	High: CH165	5825
IEEE 802.11ac VHT40	6	Low :CH151	5755
	6	High: CH159	5795
IEEE 802.11ac VHT80	6	Low :CH155	5775
IEEE 802.11n HT20	6.5	Low :CH149	5745
	6.5	Middle: CH157	5785
	6.5	High: CH165	5825
IEEE 802.11n HT40	13.5	Low :CH151	5755
	13.5	High : CH159	5795

Note 1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number	Approved type
1.	Notebook	N/A	DELL	PP09S	N/A	☒ FCC DoC ☒ BSMI ID: R41108
		Power Cord: Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: DELL, M/N: LA65NS1-00 Cable: Unshielded, Detachable, 4.0m(Bond one ferrite core)				
2.	Wireless Router	--	TP-Link	TD-W8901G	--	☒ CCC
		Adapter: Manufacturer: TP-Link, M/N:T090060-2B1 Cable:Unshielded, Detachable 1.5m				

2.4. Block Diagram of Test Setup

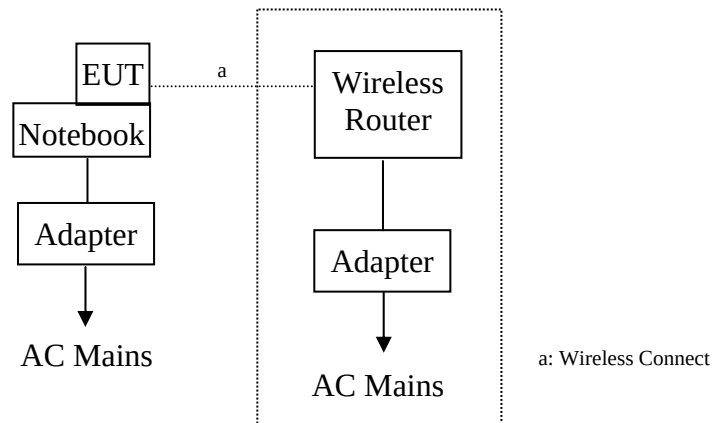

(EUT: AC600 Wireless Dual Band USB Adapter)

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Valid Date: Feb.22, 2015

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Valid Date: Oct.31, 2015

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Jun.13, 2014

: Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-00
Valid Date: Dec.15, 2016

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2015

2.6. Measurement Uncertainty (95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.1 dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.22 dB(30~200MHz, Polarize: H)
	3.23 dB(30~200MHz, Polarize: V)
	3.49 dB(200M~1GHz, Polarize: H)
	3.39 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	4.97 dB(1~6GHz, Distance: 3m)
	4.99 dB(6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57 dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Power density test	2.00 dB
Uncertainty for Frequency range test	7×10^{-8}
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Apr.18,13	1 Year
2.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Oct.31, 13	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Oct.31, 13	1 Year
4.	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	May.08, 13	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 1	May.08, 13	1 Year
6.	Terminator	Hubersuhner	50Ω	No. 2	May.08, 13	1 Year
7.	RF Cable	Fujikura	3D-2W	No.1	May.08, 13	1 Year
8.	Coaxial Switch	Anritsu	MP59B	M50564	May.08, 13	1 Year
9.	Pulse Limiter		ESH3-Z2	100341	May.08, 13	1 Year
10.	MPEG2 Measurement Generator	Rohde & Schwarz	DVG	100319	Dec.11, 13	1 Year
11.	TV Transmitter	Rohde & Schwarz	SFQ	100521	May.08, 13	1 Year
12.	Signal Generator	HP	8648A	3625U00573	May.08, 13	1 Year
13.	Pattern Generator	Philiphs	PM5418	LO625020	May.08, 13	1 Year

3.2. Block Diagram of Test Setup

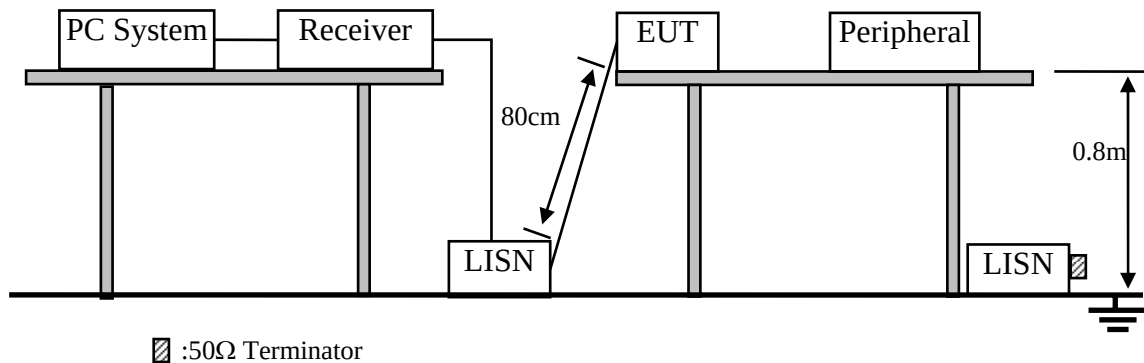

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1.AC600 Wireless Dual Band USB Adapter (EUT)

Model Number : T2U

Serial Number : N/A

3.4.2.Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5.Operating Condition of EUT

3.5.1.Setup the EUT and simulator as shown as Section 3.2.

3.5.2.Turned on the power of all equipment.

3.5.3.PC run test software to control EUT work in Tx mode.

3.6.Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2009 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS10) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7.Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

2.4G:

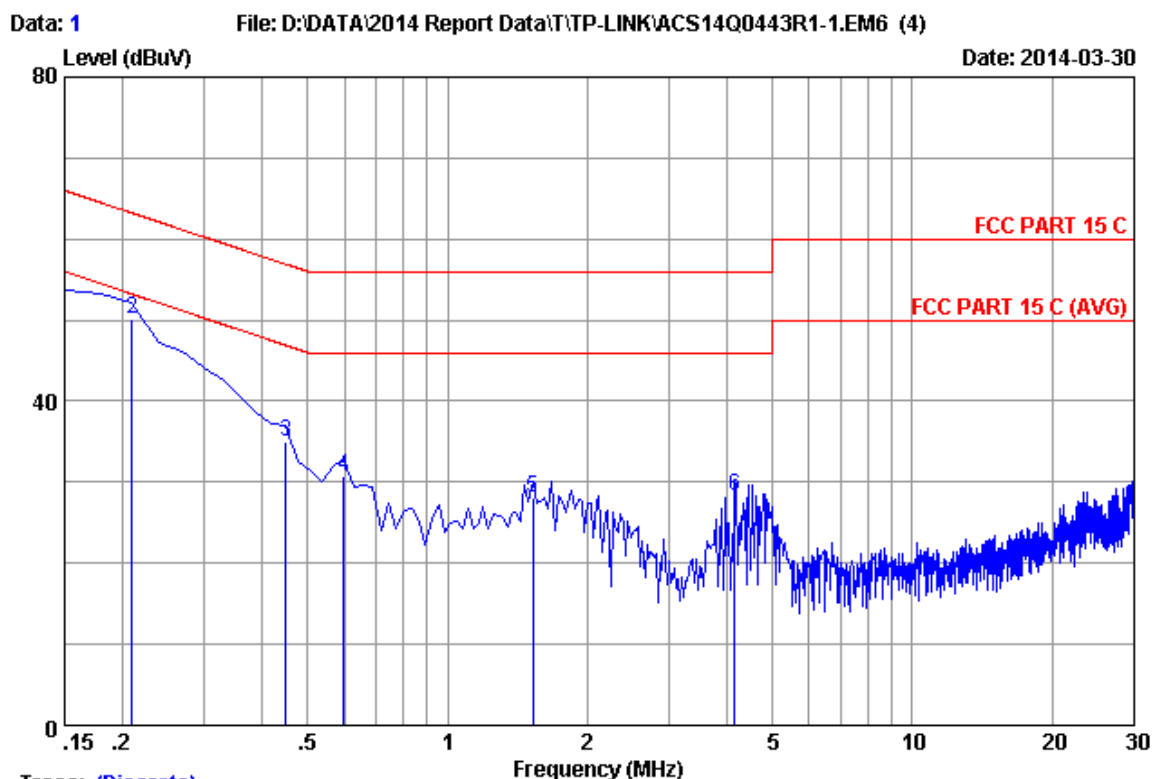

Trace: (Discrete)

Site no :1#conduction Data No :1
 Dis./Ant. :2014 ESH2-Z5 LINE
 Limit :FCC PART 15 C
 Env./Ins. :25.3°C/42% Engineer :Nick_Huang
 EUT :AC600 Wireless Dual Band USB Adapter
 Power Rating :DC 5V From PC Input AC 120V/60Hz
 Test Mode :Tx Mode(2.4G)
 M/N:T2U


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.12	9.87	41.63	51.62	66.00	14.38	QP
2	0.20970	0.13	9.88	40.14	50.15	63.22	13.07	QP
3	0.44850	0.15	9.88	24.97	35.00	56.90	21.90	QP
4	0.59775	0.16	9.89	20.77	30.82	56.00	25.18	QP
5	1.523	0.18	9.90	18.02	28.10	56.00	27.90	QP
6	4.150	0.25	9.94	18.03	28.22	56.00	27.78	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)
 +Reading.
 2.If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 2

File: D:\DATA\2014 Report Data\T\TP-LINK\ACS14Q0443R1-1.EM6 (4)

Date: 2014-03-30

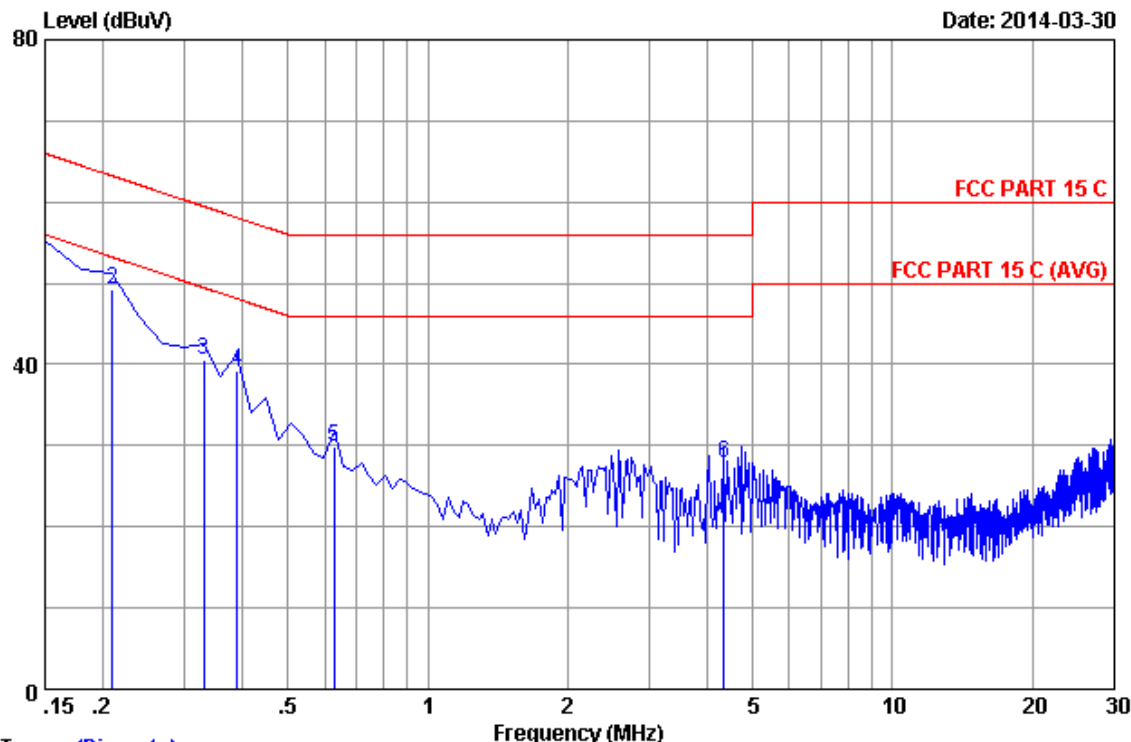

Trace: (Discrete)

Site no :1#conduction Data No :2
 Dis./Ant. :2013 ESH2-Z5 NEUTRAL
 Limit :FCC PART 15 C
 Env./Ins. :25.3°C/42% Engineer :Nick_Huang
 EUT :AC600 Wireless Dual Band USB Adapter
 Power Rating :DC 5V From PC Input AC 120V/60Hz
 Test Mode :Tx Mode(2.4G)
 M/N:T2U

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.18	9.87	43.21	53.26	66.00	12.74	QP
2	0.20970	0.18	9.88	39.13	49.19	63.22	14.03	QP
3	0.32910	0.20	9.88	30.55	40.63	59.47	18.84	QP
4	0.38880	0.21	9.88	29.24	39.33	58.09	18.76	QP
5	0.62760	0.26	9.89	19.76	29.91	56.00	26.09	QP
6	4.329	0.32	9.94	17.54	27.80	56.00	28.20	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)
 +Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Band 4:5725MHz-5850MHz

Data: 3

File: D:\DATA\2014 Report Data\T\TP-LINK\ACS14Q0443R1-1.EM6 (4)

Date: 2014-03-30

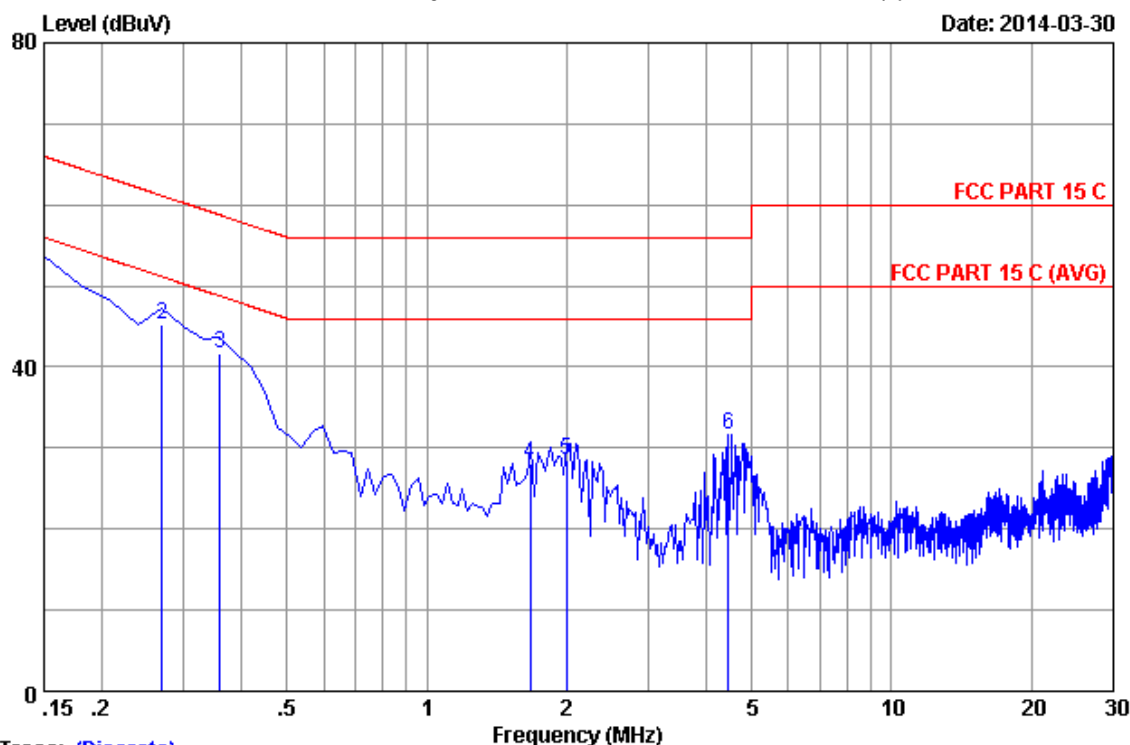

Trace: (Discrete)

Site no :1#conduction Data No :3
 Dis./Ant. :2014 ESH2-25 LINE
 Limit :FCC PART 15 C
 Env./Ins. :25.3°C/42% Engineer :Nick_Huang
 EUT :AC600 Wireless Dual Band USB Adapter
 Power Rating :DC 5V From PC Input AC 120V/60Hz
 Test Mode :Tx Mode(5G)
 M/N:T2U


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.12	9.87	41.63	51.62	66.00	14.38	QP
2	0.26940	0.14	9.88	35.15	45.17	61.14	15.97	QP
3	0.35895	0.14	9.88	31.60	41.62	58.75	17.13	QP
4	1.672	0.18	9.90	17.92	28.00	56.00	28.00	QP
5	2.001	0.19	9.91	18.41	28.51	56.00	27.49	QP
6	4.448	0.25	9.94	21.50	31.69	56.00	24.31	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)
 +Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 4

File: D:\DATA\2014 Report Data\T\TP-LINK\ACS14Q0443R1-1.EM6 (4)

Date: 2014-03-30

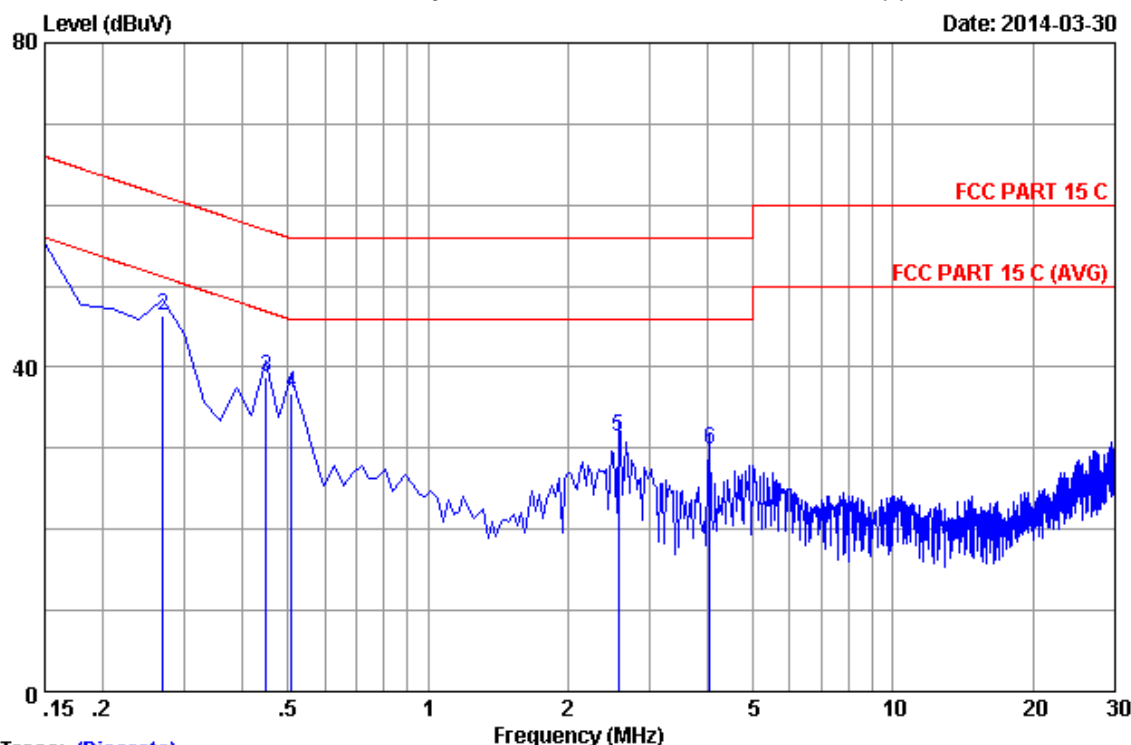

Trace: (Discrete)

Site no :1#conduction Data No :4
 Dis./Ant. :2013 ESH2-Z5 NEUTRAL
 Limit :FCC PART 15 C
 Env./Ins. :25.3°C/42% Engineer :Nick_Huang
 EUT :AC600 Wireless Dual Band USB Adapter
 Power Rating :DC 5V From PC Input AC 120V/60Hz
 Test Mode :Tx Mode(5G)
 M/N:T2U

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.18	9.87	41.21	51.26	66.00	14.74	QP
2	0.26940	0.19	9.88	36.39	46.46	61.14	14.68	QP
3	0.44850	0.22	9.88	28.67	38.77	56.90	18.13	QP
4	0.50820	0.23	9.88	26.71	36.82	56.00	19.18	QP
5	2.568	0.28	9.92	21.15	31.35	56.00	24.65	QP
6	4.031	0.31	9.94	19.58	29.83	56.00	26.17	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.

2.If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30MHz~1000MHz (At Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Nov.24, 13	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 13	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 13	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 13	1 Year
5	Bilog Antenna	TESEQ	CBL6112D	35375	May.30, 13	1 Year
6	RF Cable	MIYAZAKI	CFD400-NL	3# Chamber No.1	May.08, 13	1 Year
7	Coaxial Switch	Anritsu	MP59B	M74389	May.08, 13	1 Year

4.1.2. For frequency range 1GHz~40GHz (At Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 13	1 Year
2	Horn Antenna	EMCO	3115	9510-4580	May.28, 13	1 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 13	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX106	77980/6	May.08, 13	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	May.08, 13	1 Year
6	Horn Antenna	EMCO	3116	00060089	Aug.28, 13	1 Year

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

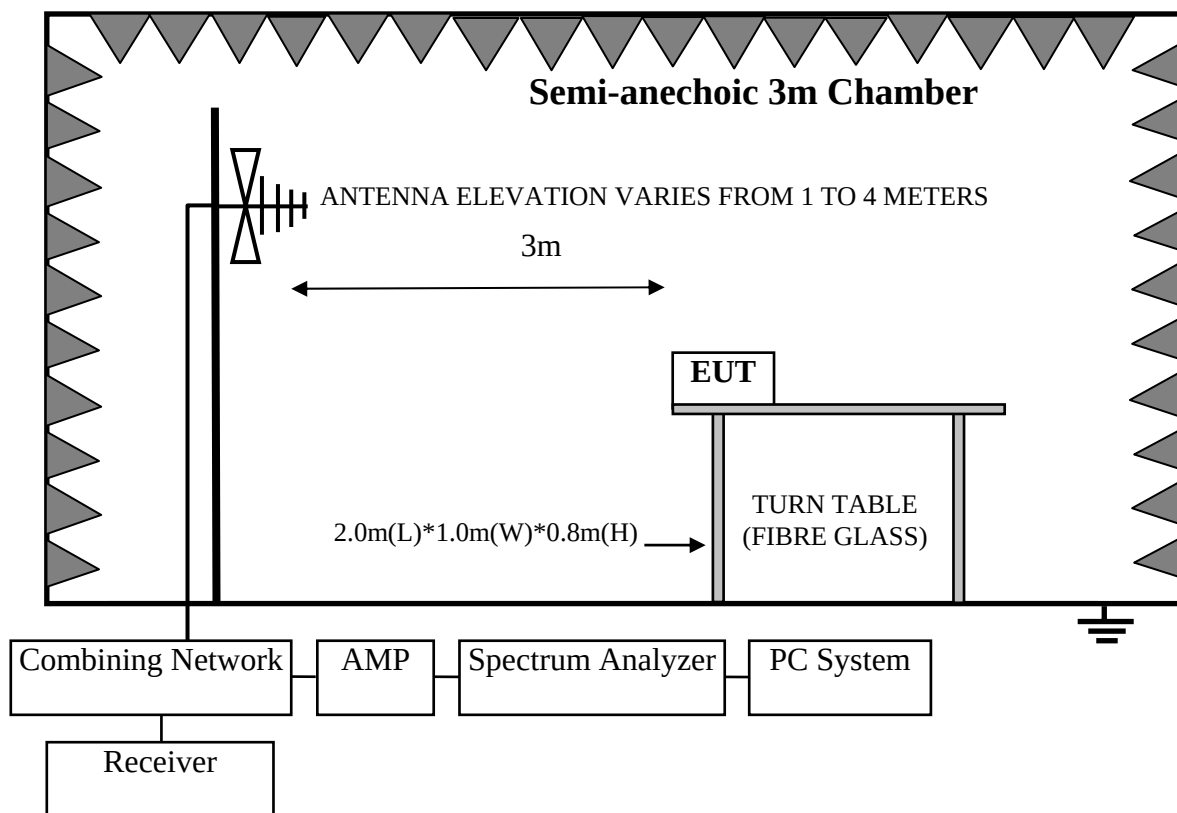

For frequency range 1GHz-40GHz

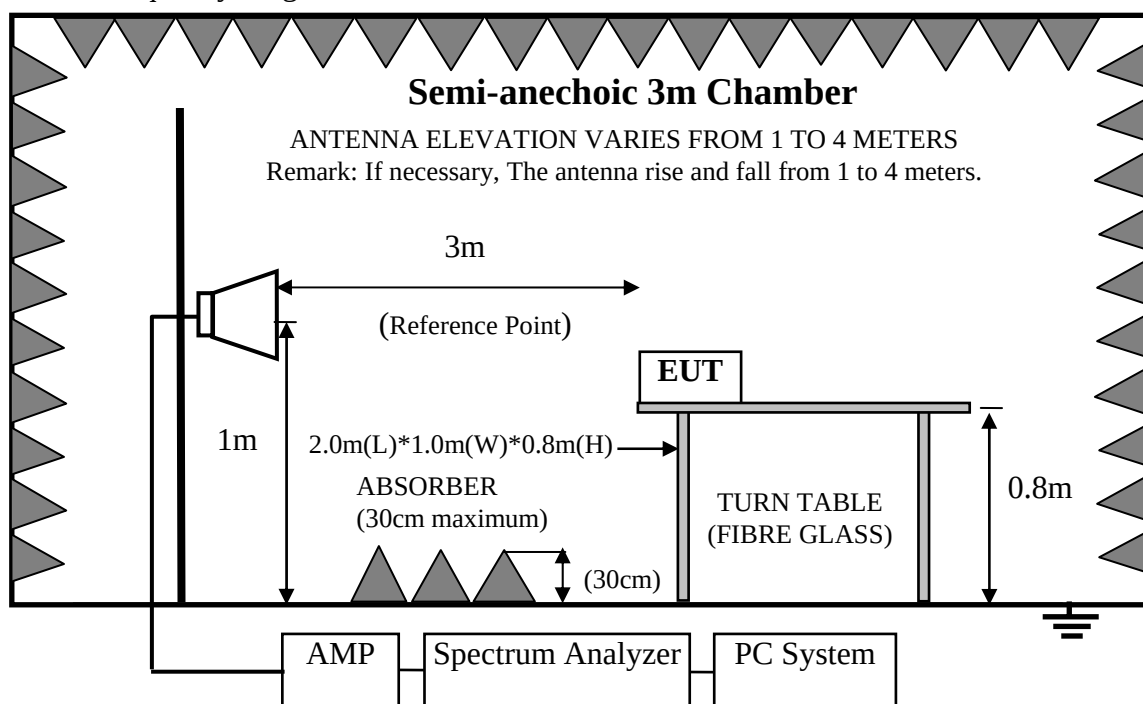

4.3.Radiated Emission Limit

4.3.1. 15.247&209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.4.

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.5. except the test set up replaced by Section 4.2.

4.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as test photo indicated.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (40GHz) are checked. and no any emissions were found from 18GHz to 40 GHz, So the radiated emissions from 18GHz to 40GHz were not record.

4.7. Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 40 GHz were comply with 15.209 limits.

Note: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


2.4G:

Frequency: 30MHz~1GHz

Data: 1

File: E:\2014 Report Data\T\TP-LINK\ACS14Q0443R1.EM6 (12)

Date: 2014-03-30

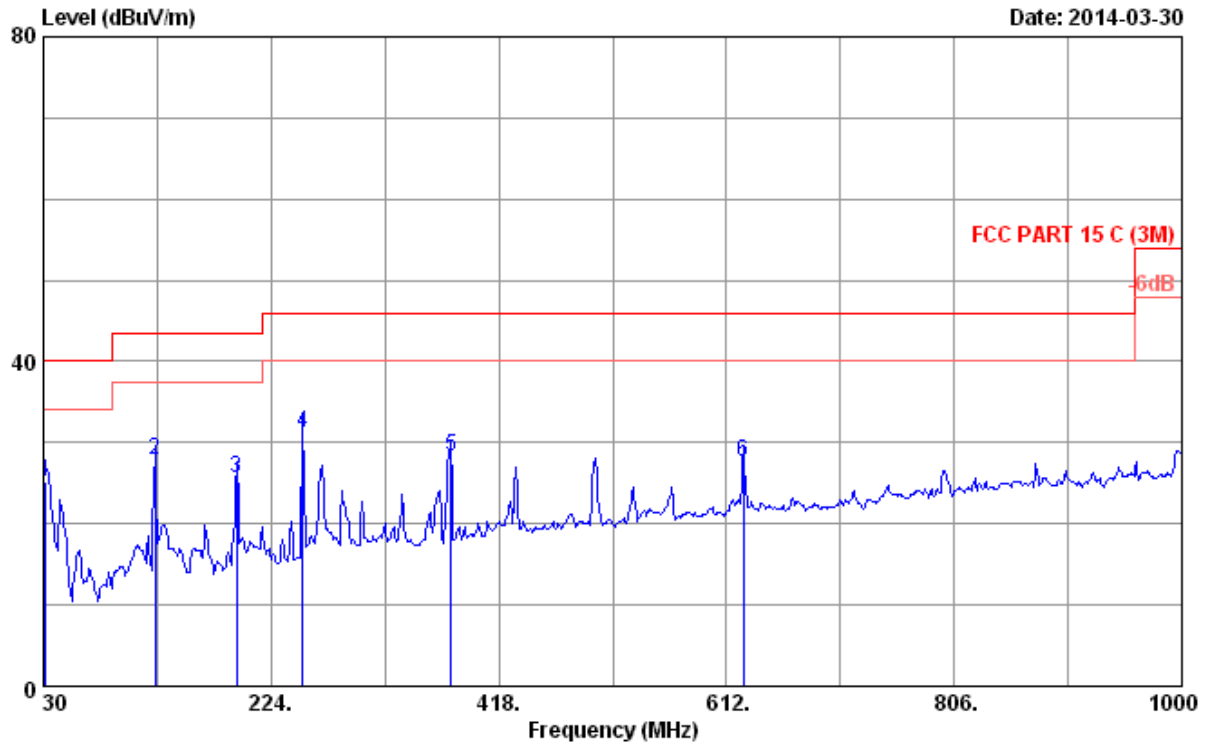

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/65% Engineer : Even_Deng
 EUT : AC600 Wireless Dual Band USB Adapter
 Power rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : Tx Mode(2.4G)
 M/N:T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	31.940	18.84	0.86	5.50	25.20	40.00	14.80	QP
2	125.060	12.90	1.51	13.34	27.75	43.50	15.75	QP
3	194.900	9.89	1.77	13.96	25.62	43.50	17.88	QP
4	251.160	13.16	1.98	16.08	31.22	46.00	14.78	QP
5	377.260	15.85	2.39	10.15	28.39	46.00	17.61	QP
6	626.550	19.53	3.11	4.97	27.61	46.00	18.39	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 2

File: E:\2014 Report Data\T\TP-LINK\ACS14Q0443R1.EM6 (12)

Date: 2014-03-30

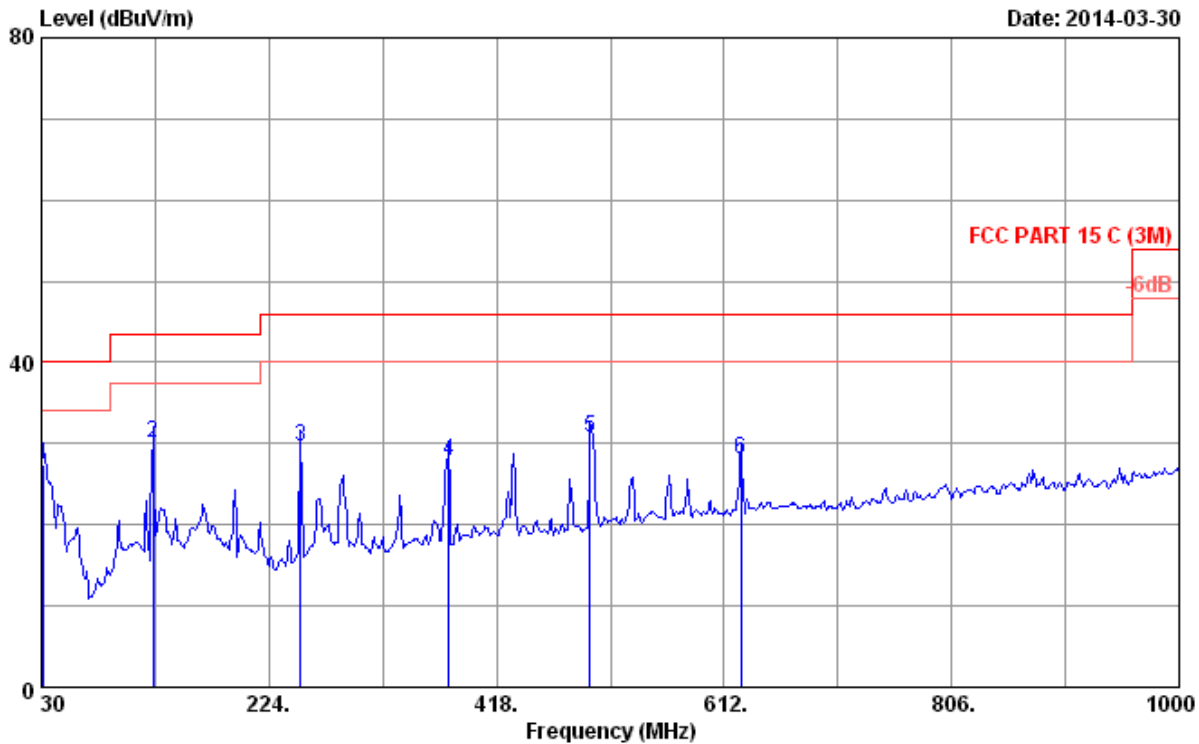

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/65% Engineer : Even_Deng
 EUT : AC600 Wireless Dual Band USB Adapter
 Power rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : Tx Mode(2.4G)
 M/N:T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	18.84	0.86	7.81	27.51	40.00	12.49	QP
2	125.060	12.90	1.51	15.58	29.99	43.50	13.51	QP
3	251.160	13.16	1.98	14.53	29.67	46.00	16.33	QP
4	377.260	15.85	2.39	9.67	27.91	46.00	18.09	QP
5	497.540	17.95	2.74	10.09	30.78	46.00	15.22	QP
6	626.550	19.53	3.11	5.34	27.98	46.00	18.02	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Band 4:5725MHz-5850MHz

Frequency: 30MHz~1GHz

Data: 7

File: E:\2014 Report Data\T\TP-LINK\ACS14Q0443R1.EM6 (12)

Date: 2014-03-30

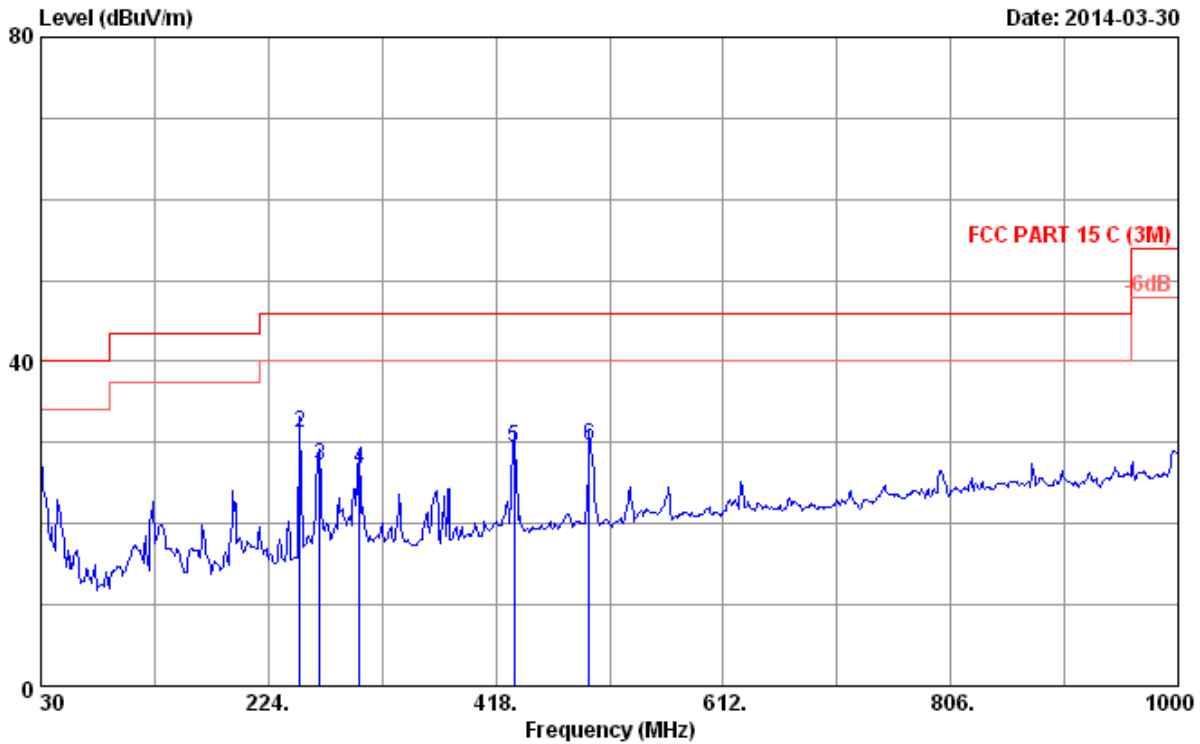

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/65% Engineer : Even_Deng
 EUT : AC600 Wireless Dual Band USB Adapter
 Power rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : Tx Mode(5G)
 M/N:T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	30.000	20.10	0.83	3.98	24.91	40.00	15.09	QP
2	251.160	13.16	1.98	16.08	31.22	46.00	14.78	QP
3	267.650	13.62	2.05	11.51	27.18	46.00	18.82	QP
4	301.600	14.03	2.17	10.47	26.67	46.00	19.33	QP
5	433.520	17.03	2.56	9.76	29.35	46.00	16.65	QP
6	497.540	17.95	2.74	8.96	29.65	46.00	16.35	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 8

File: E:\2014 Report Data\T\TP-LINK\ACS14Q0443R1.EM6 (12)

Date: 2014-03-30

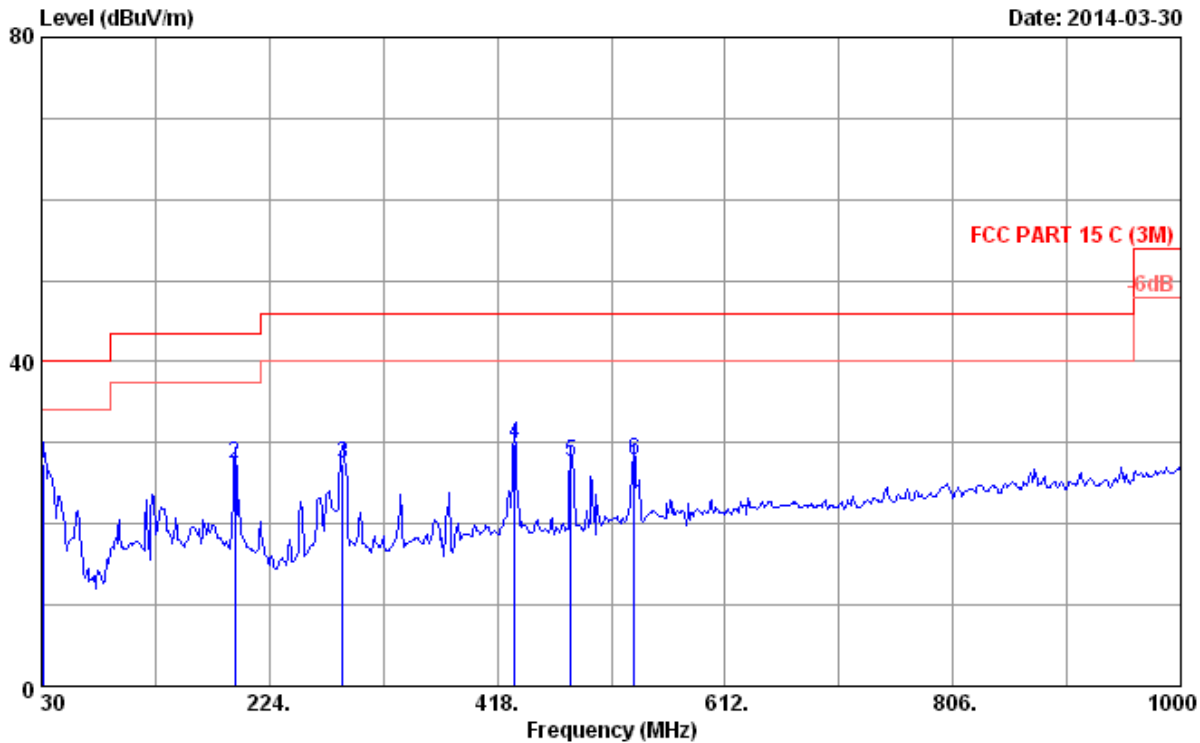

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/65% Engineer : Even_Deng
 EUT : AC600 Wireless Dual Band USB Adapter
 Power rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : Tx Mode(5G)
 M/N:T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	18.84	0.86	7.81	27.51	40.00	12.49	QP
2	194.900	9.89	1.77	15.73	27.39	43.50	16.11	QP
3	286.080	13.70	2.12	11.51	27.33	46.00	18.67	QP
4	432.550	17.05	2.55	10.19	29.79	46.00	16.21	QP
5	481.050	17.80	2.70	7.11	27.61	46.00	18.39	QP
6	534.400	18.19	2.85	6.72	27.76	46.00	18.24	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

2.4G:


Frequency: 1GHz~18GHz

Data: 1

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Level (dBuV/m)


Date: 2014-03-24

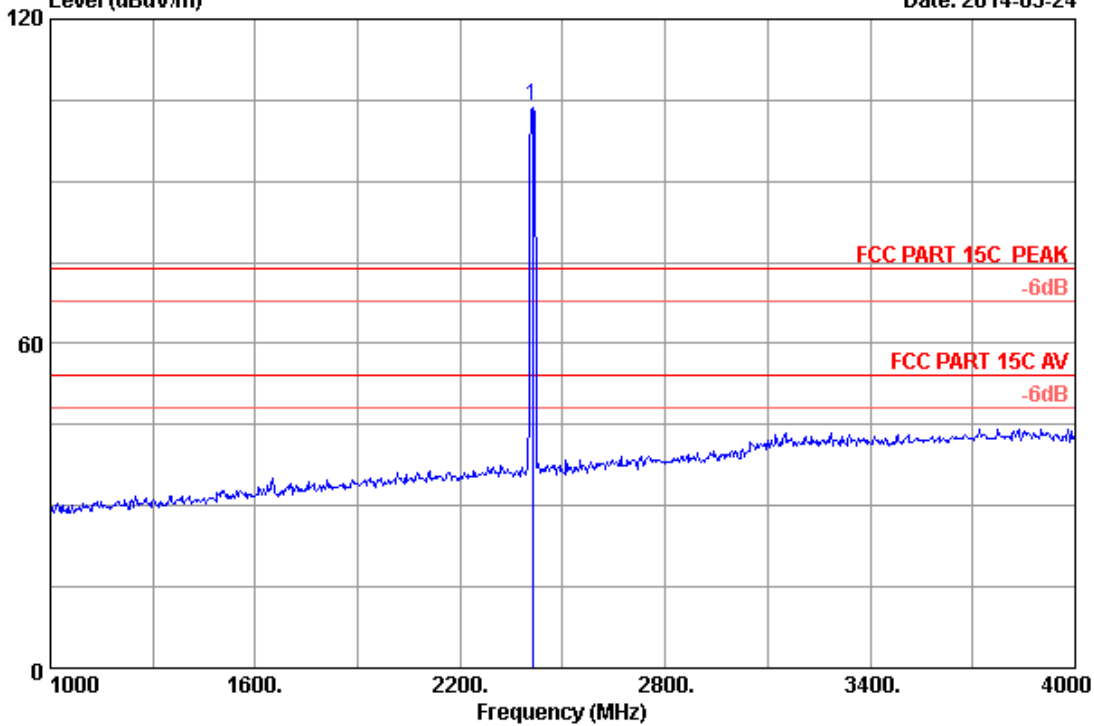

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2412.000	28.21	5.81	35.70	105.75	104.07	74.00	-30.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

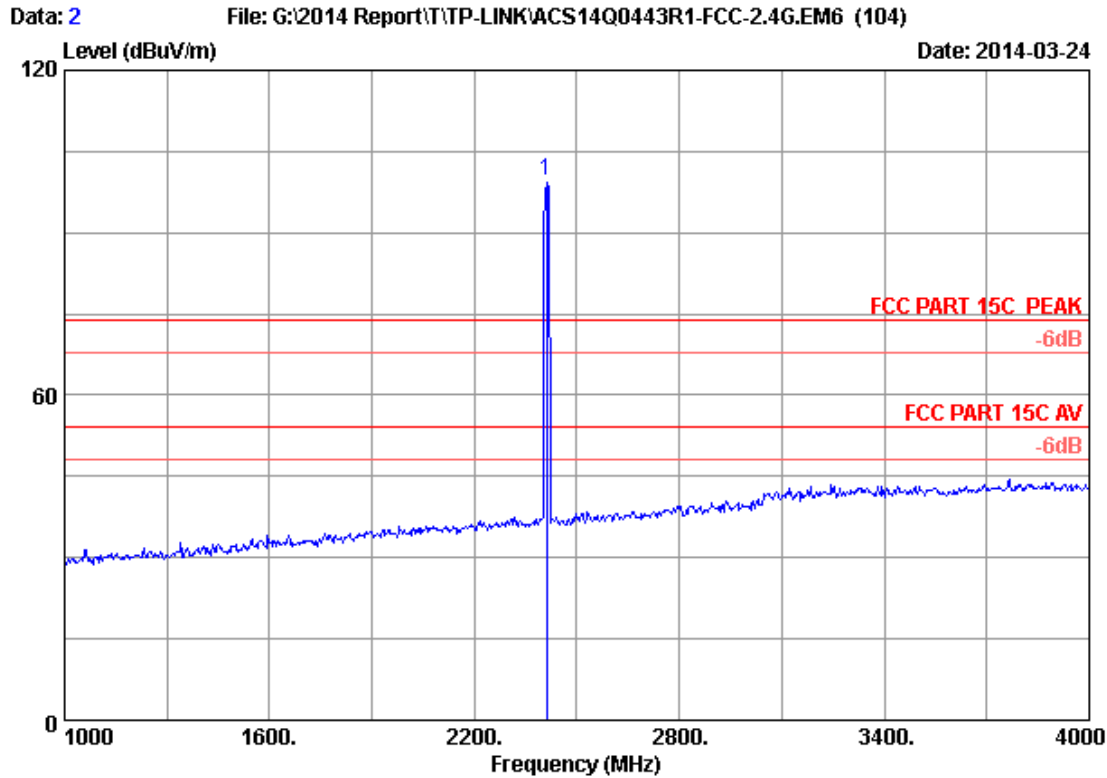


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2412.000	28.21	5.81	35.70	101.24	99.56	74.00	-25.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

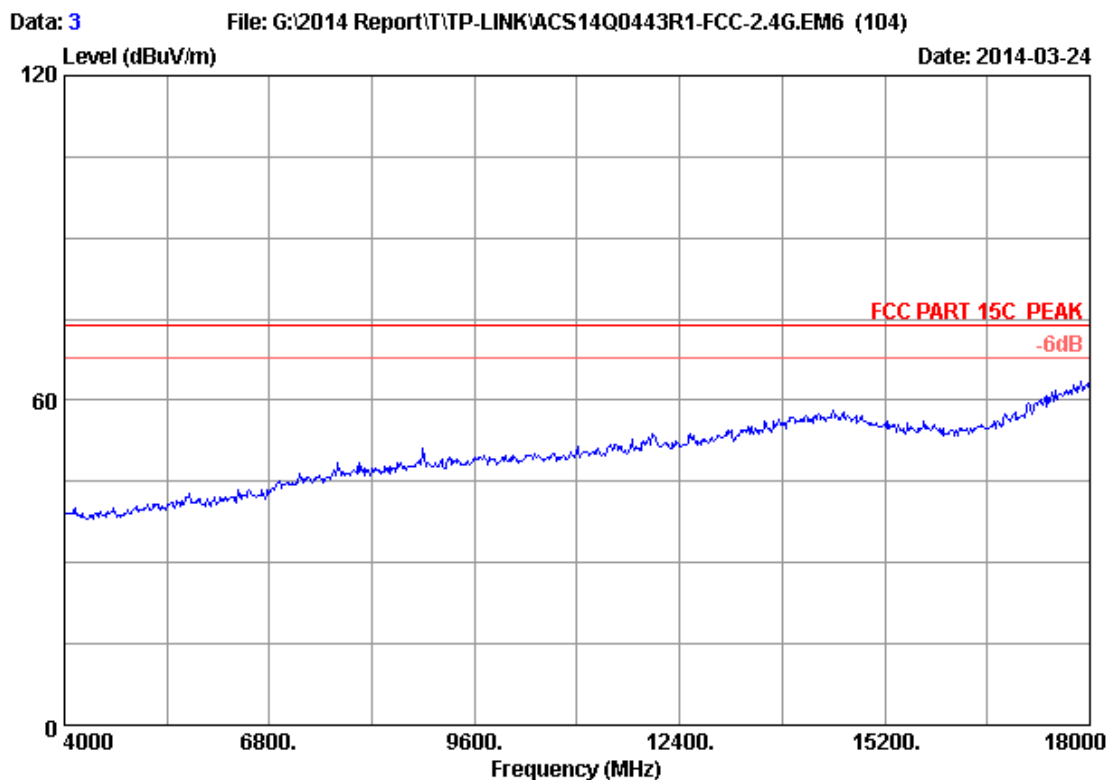


Site no.	: 3m Chamber	Data no.	: 3
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11b 2412MHz Tx		
M/N	: T2U		

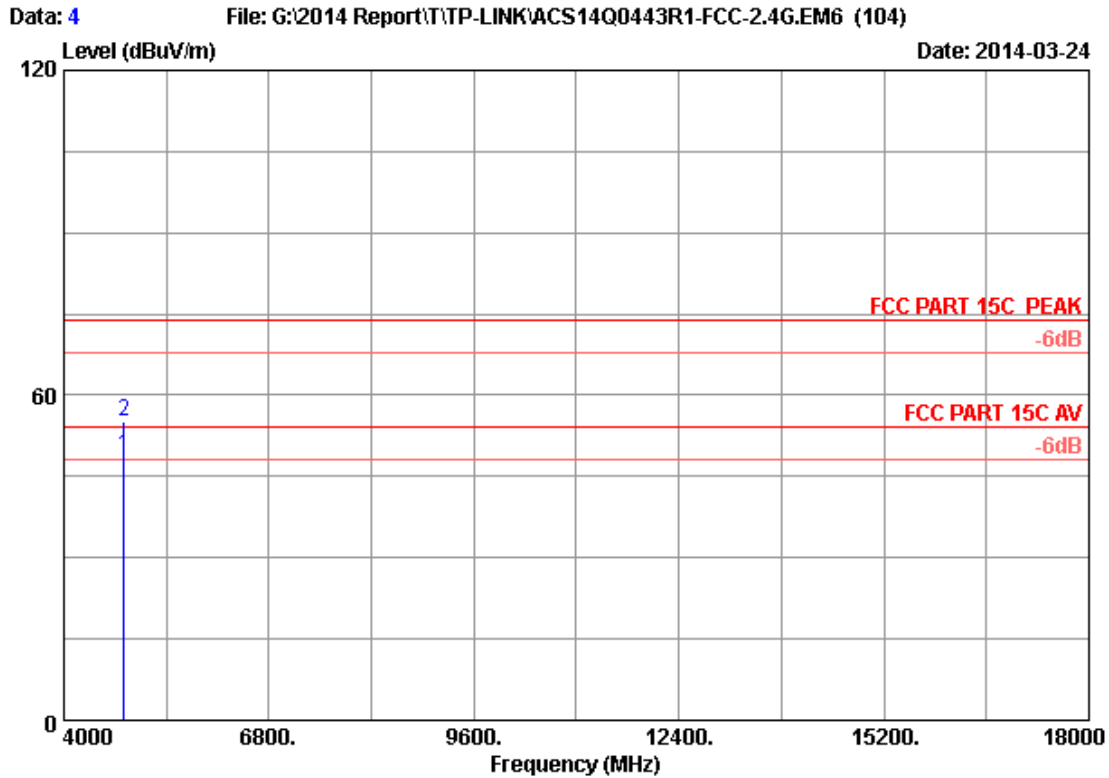


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	43.08	48.84	54.00	5.16	Average
2	4824.000	32.88	8.58	35.70	49.46	55.22	74.00	18.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

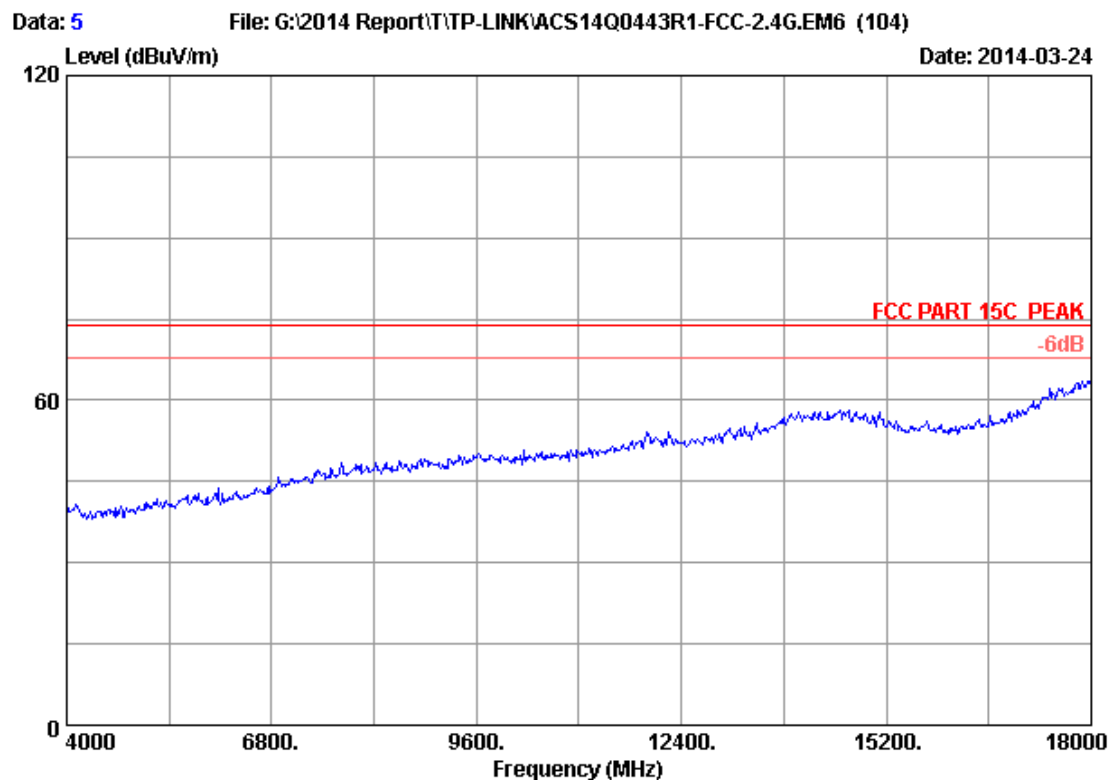


Site no.	: 3m Chamber	Data no.	: 5
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11b 2412MHz Tx		
M/N	: T2U		

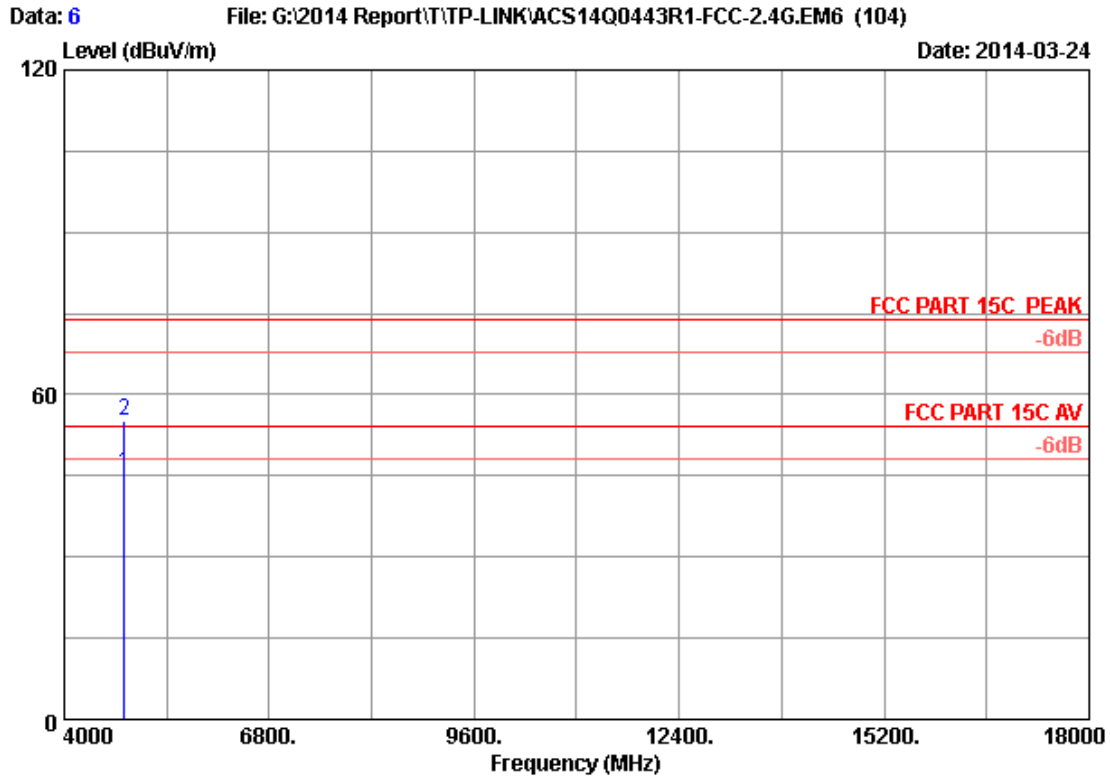

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	39.67	45.43	54.00	8.57	Average
2	4824.000	32.88	8.58	35.70	49.38	55.14	74.00	18.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

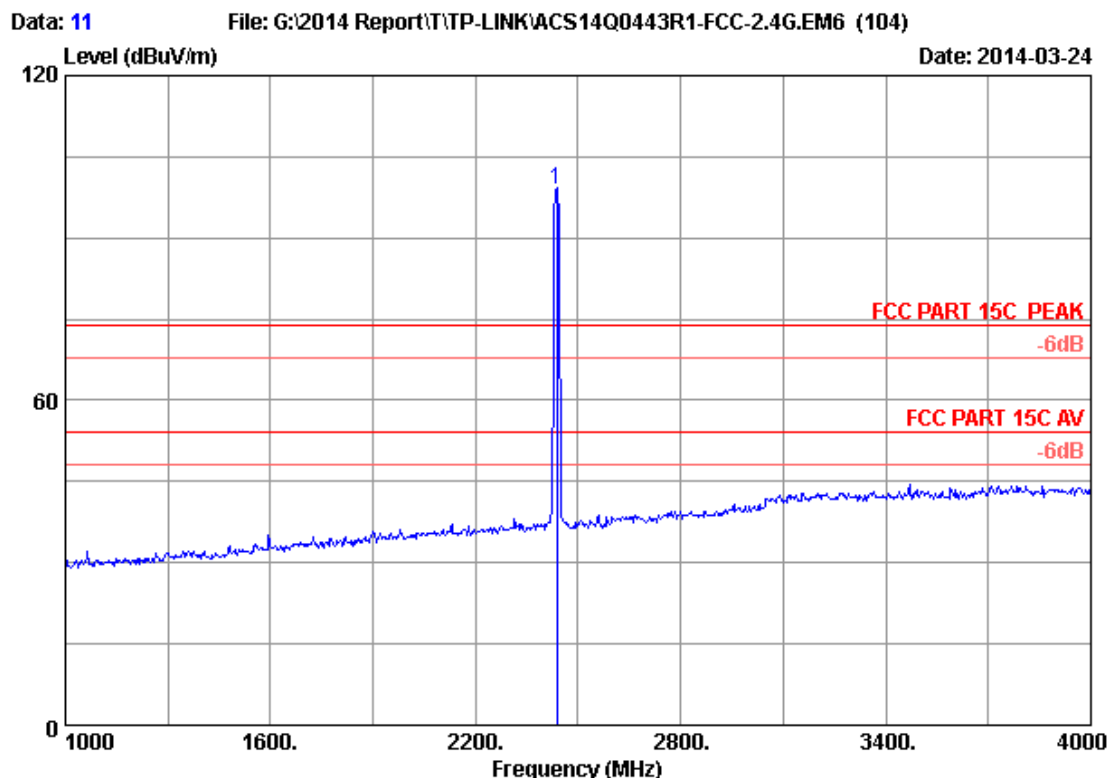

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	35.70	100.65	99.06	74.00	-25.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

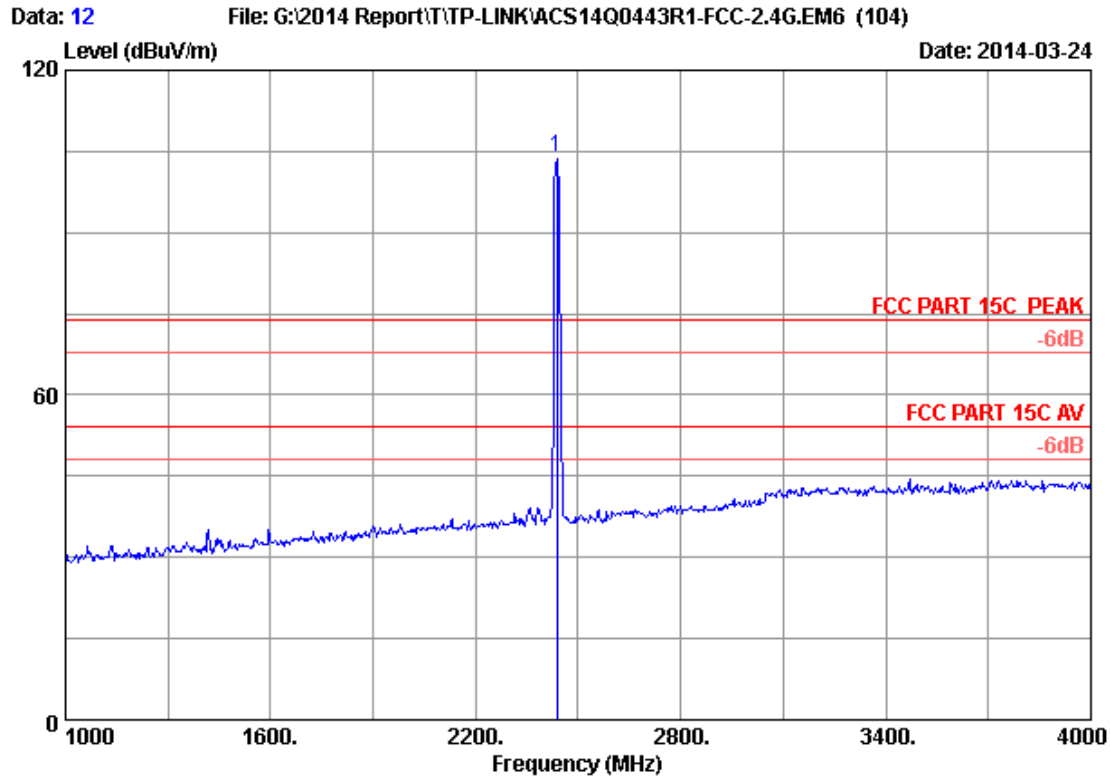


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	35.70	105.48	103.89	74.00	-29.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

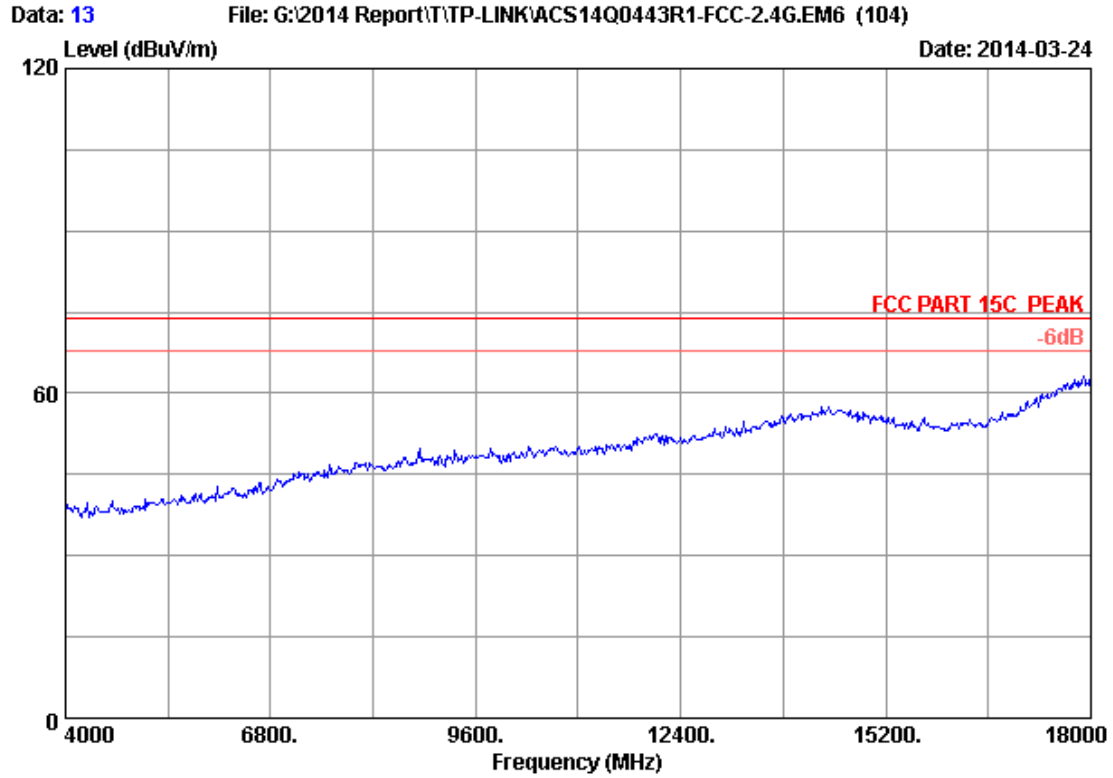

Site no.	: 3m Chamber	Data no.	: 13
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11b 2437MHz Tx		
M/N	: T2U		

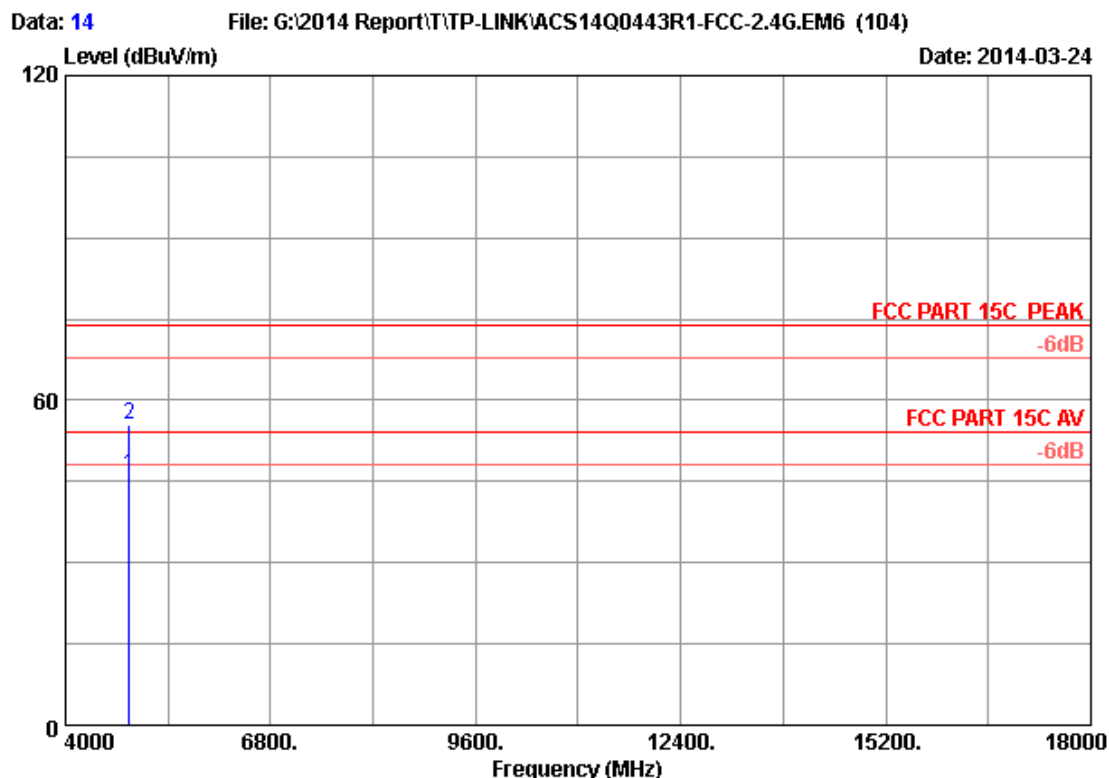

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	40.21	46.11	54.00	7.89	Average
2	4874.000	32.97	8.63	35.70	49.43	55.33	74.00	18.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 15

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

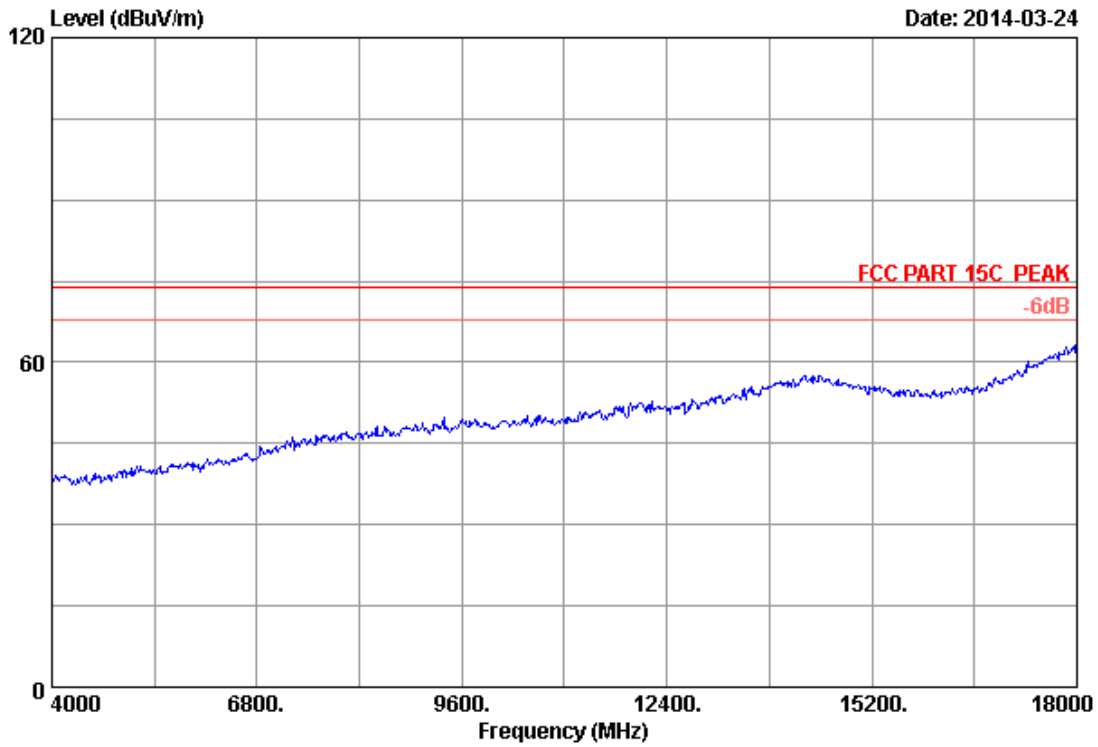

Site no.	: 3m Chamber	Data no.	: 15
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11b 2437MHz Tx		
M/N	: T2U		

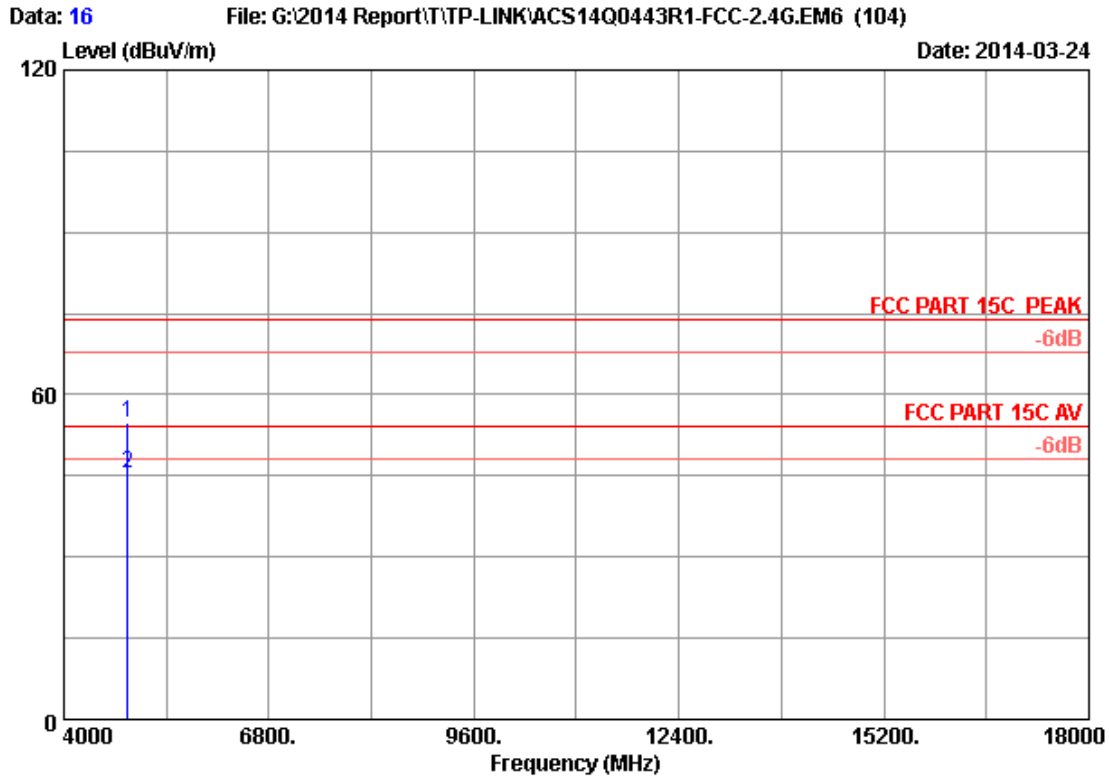

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4874.000	32.97	8.63	35.70	49.04	54.94	74.00	19.06	Peak
2	4874.000	32.97	8.63	35.70	39.55	45.45	54.00	8.55	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 17

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

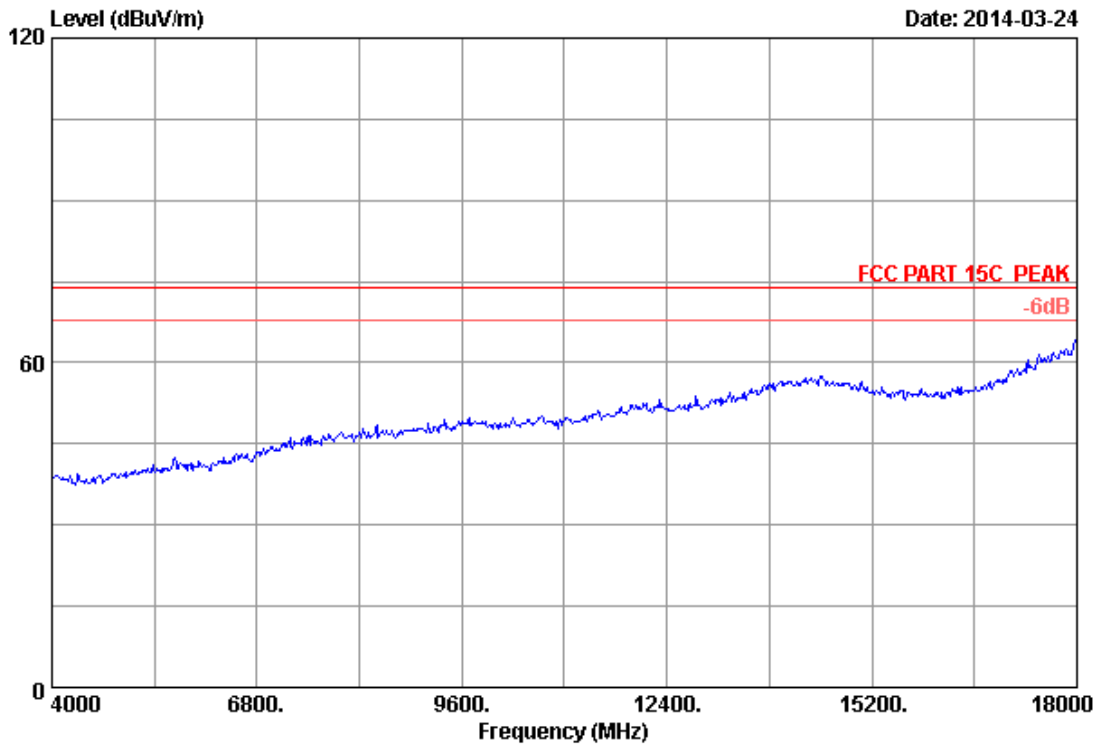

Site no.	: 3m Chamber	Data no.	: 17
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11b 2462MHz Tx		
M/N	: T2U		

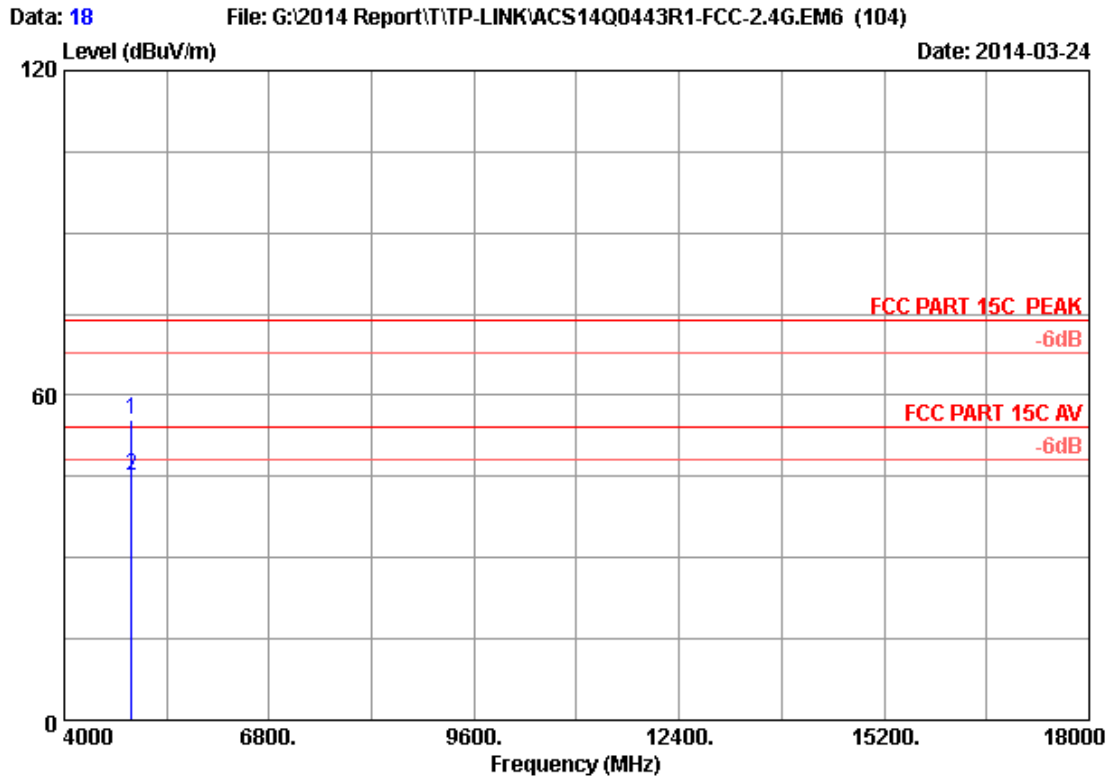

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	49.57	55.62	74.00	18.38	Peak
2	4924.000	33.06	8.69	35.70	39.24	45.29	54.00	8.71	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 19

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

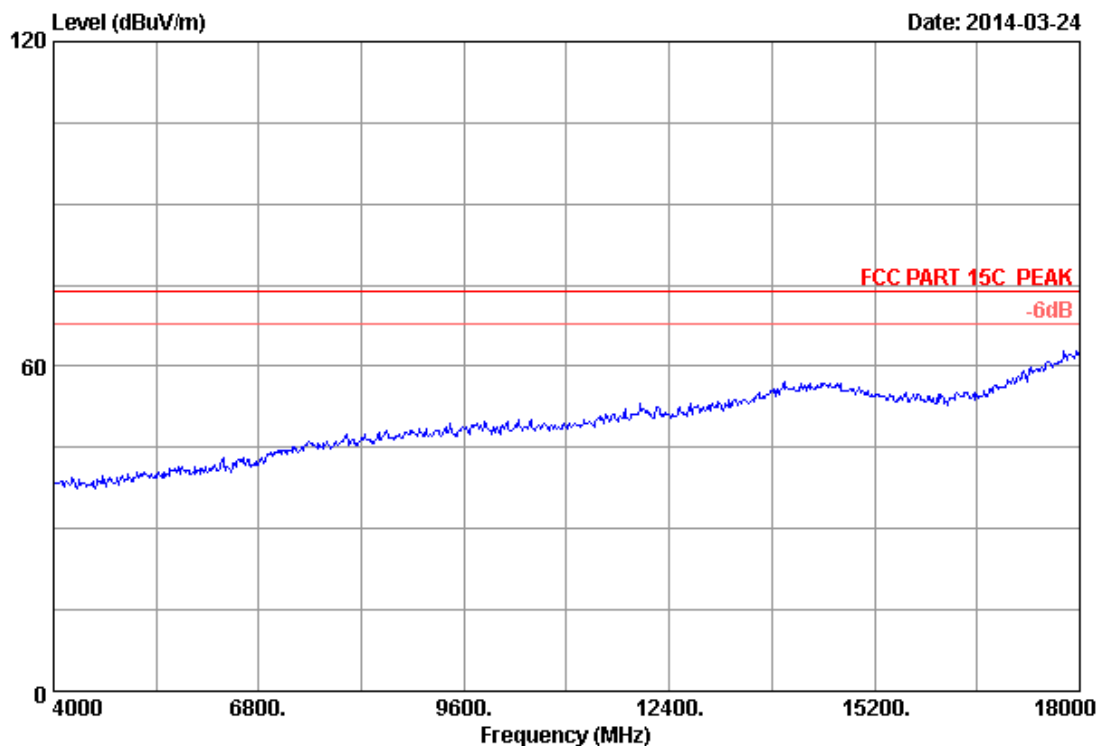


Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11b 2462MHz Tx		
M/N	: T2U		

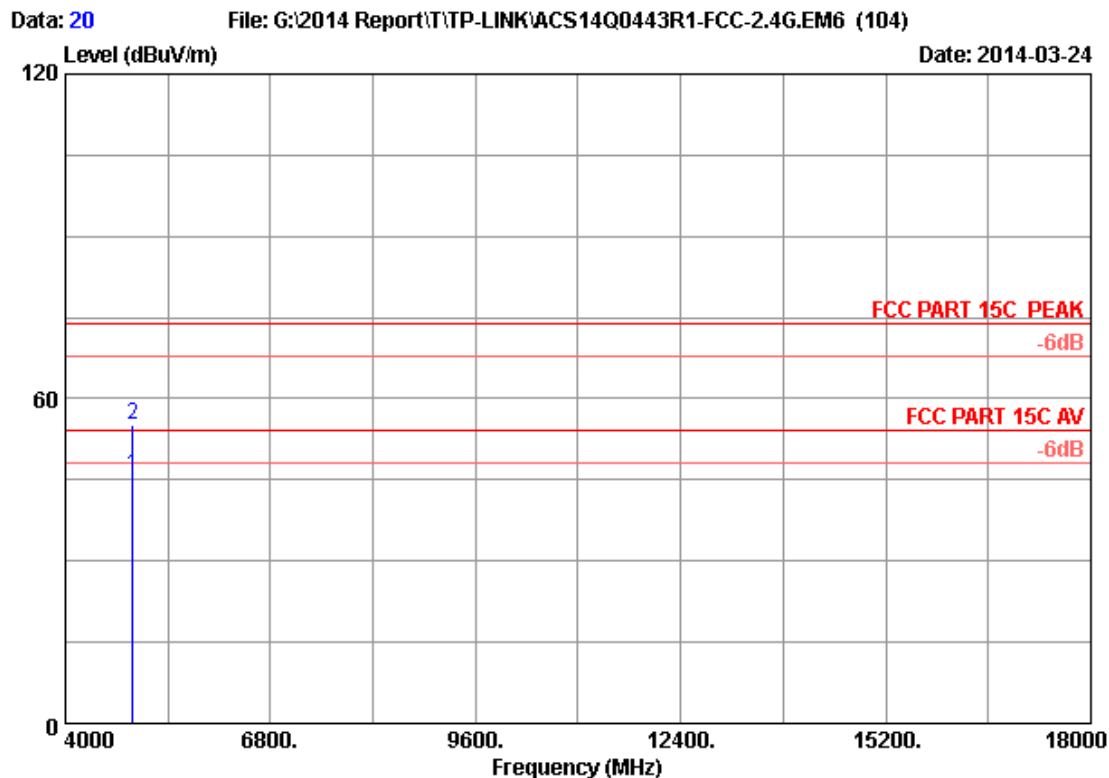

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	39.69	45.74	54.00	8.26	Average
2	4924.000	33.06	8.69	35.70	49.26	55.31	74.00	18.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

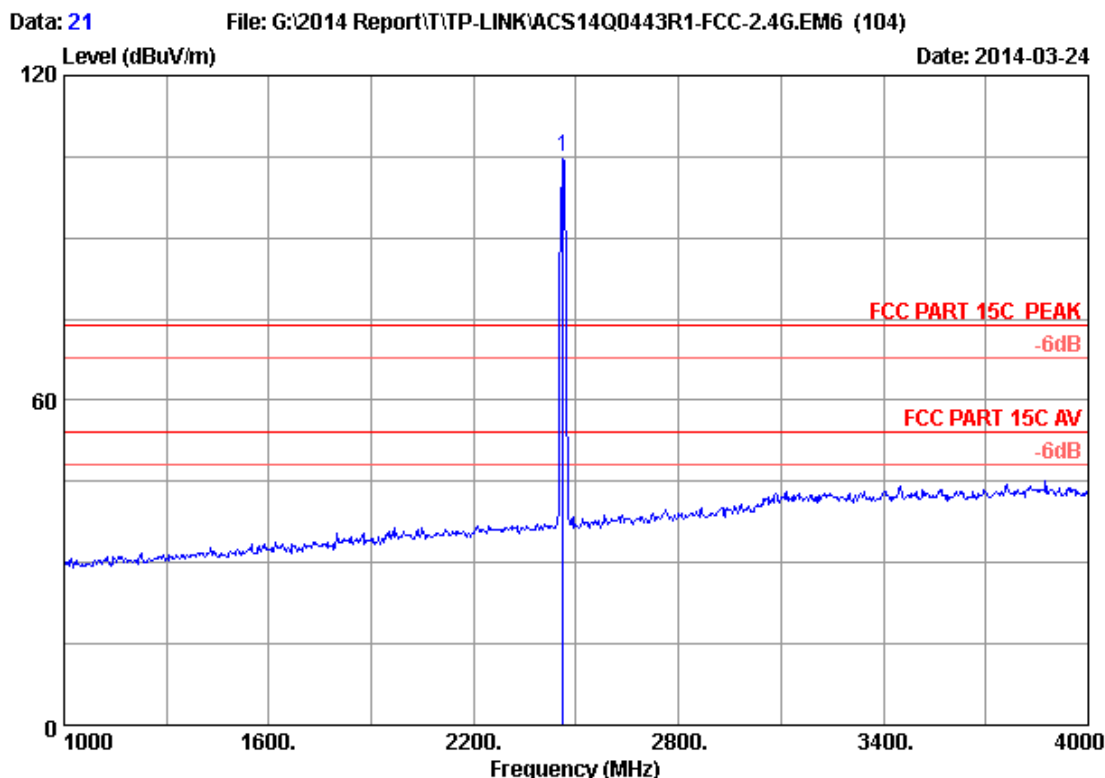

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2462.000	28.32	5.89	35.70	106.56	105.07	74.00	-31.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

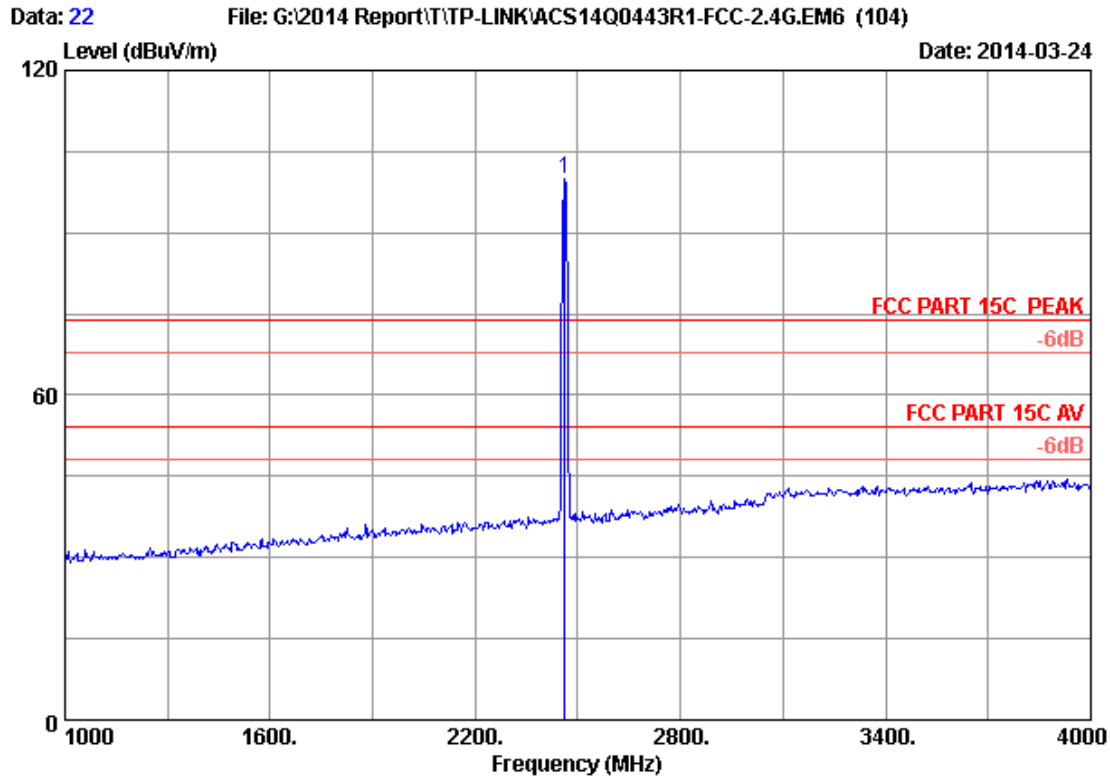

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.000	28.32	5.89	35.70	101.49	100.00	74.00	-26.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 31

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)


Date: 2014-03-24

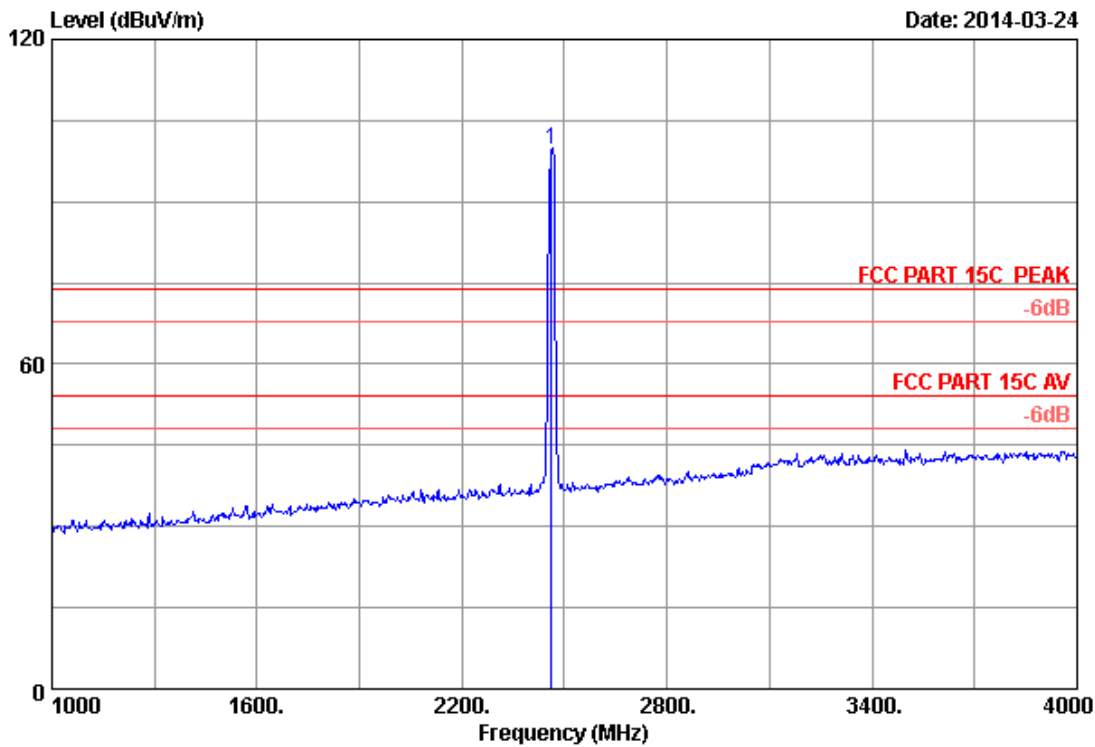

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.000	28.32	5.89	35.70	101.02	99.53	74.00	-25.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

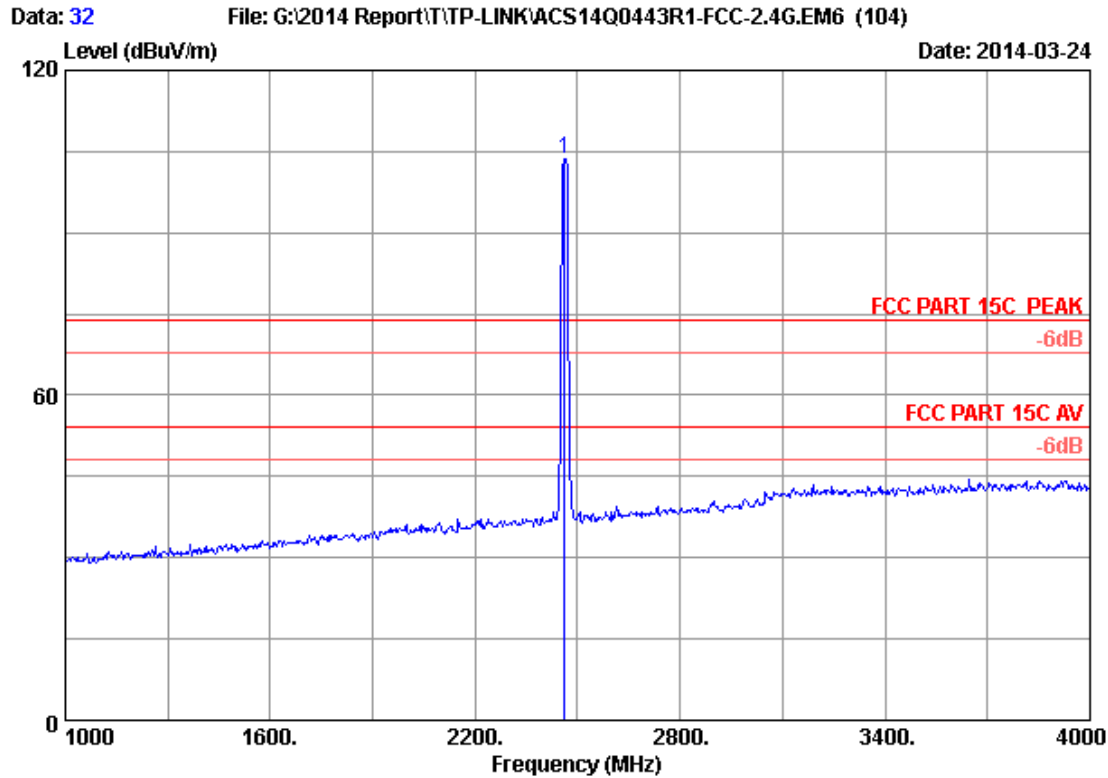

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.000	28.32	5.89	35.70	105.25	103.76	74.00	-29.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 33

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

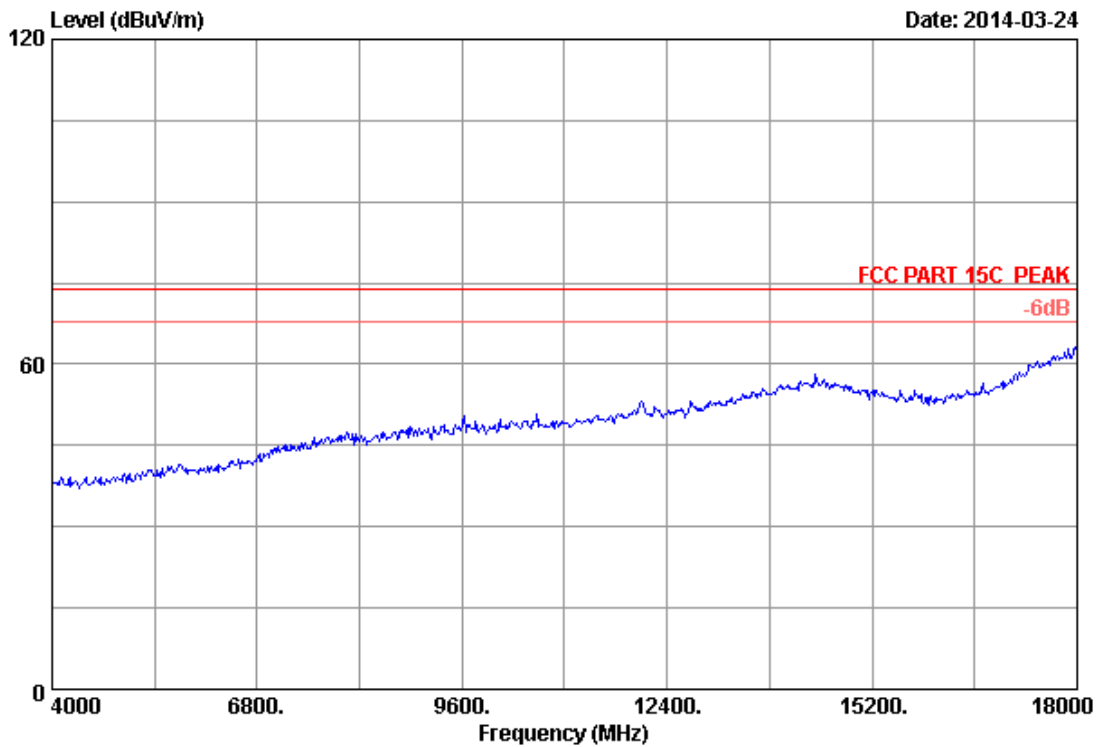


Site no.	: 3m Chamber	Data no.	: 33
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2462MHz Tx		
M/N	: T2U		

Data: 34

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

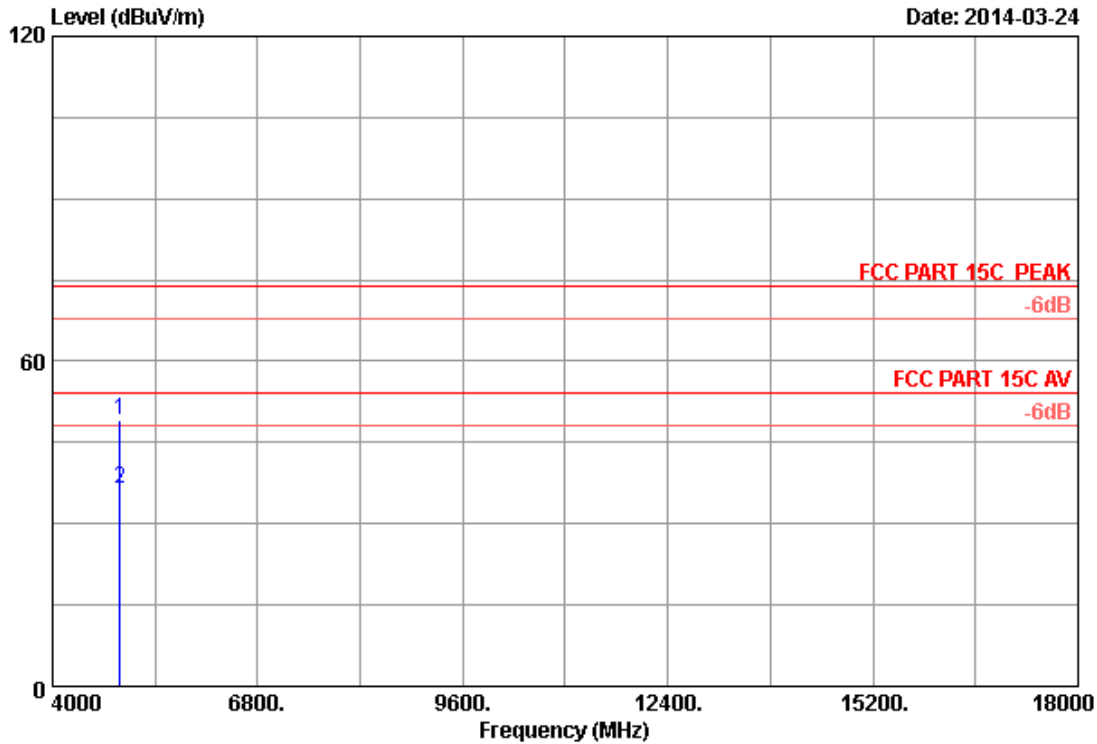

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	43.15	49.20	74.00	24.80	Peak
2	4924.000	33.06	8.69	35.70	30.27	36.32	54.00	17.68	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 35

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

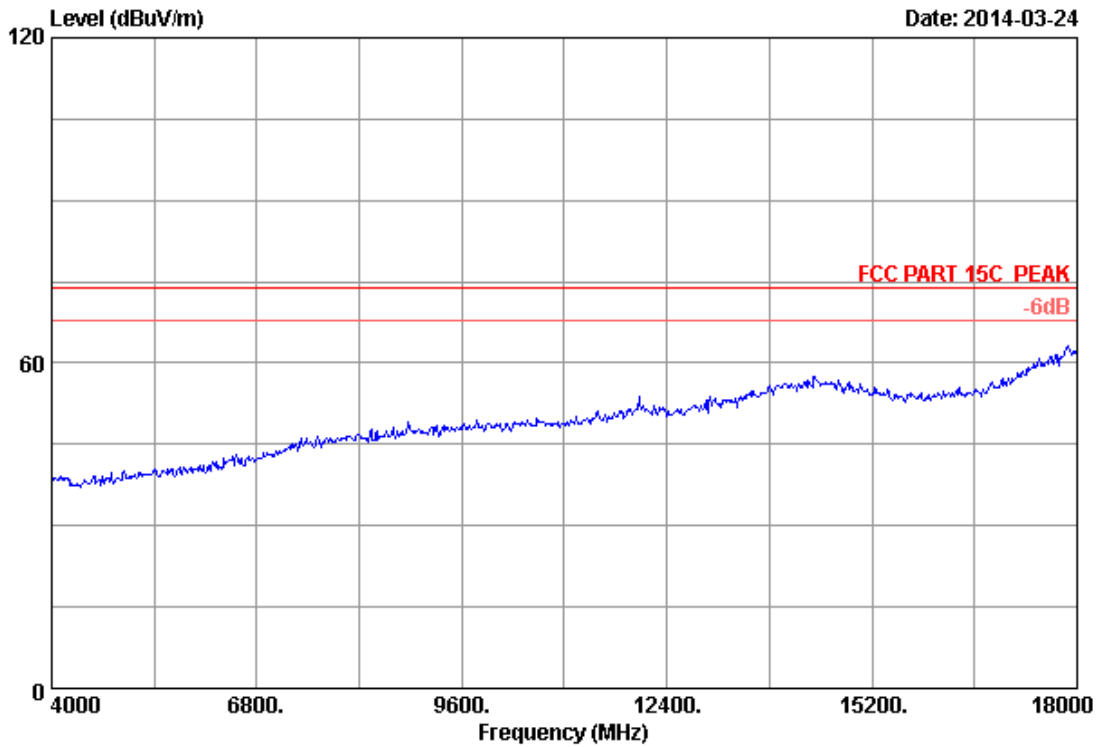


Site no.	: 3m Chamber	Data no.	: 35
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2462MHz Tx		
M/N	: T2U		

Data: 36

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

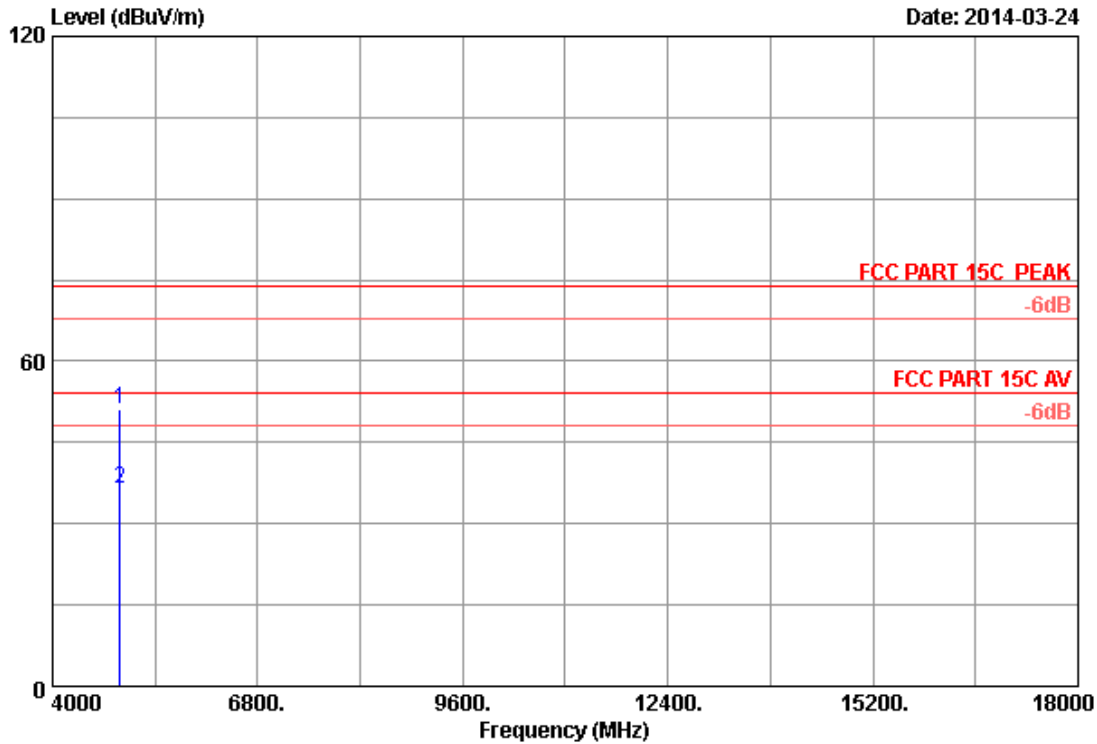

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	45.15	51.20	74.00	22.80	Peak
2	4924.000	33.06	8.69	35.70	30.25	36.30	54.00	17.70	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 37

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

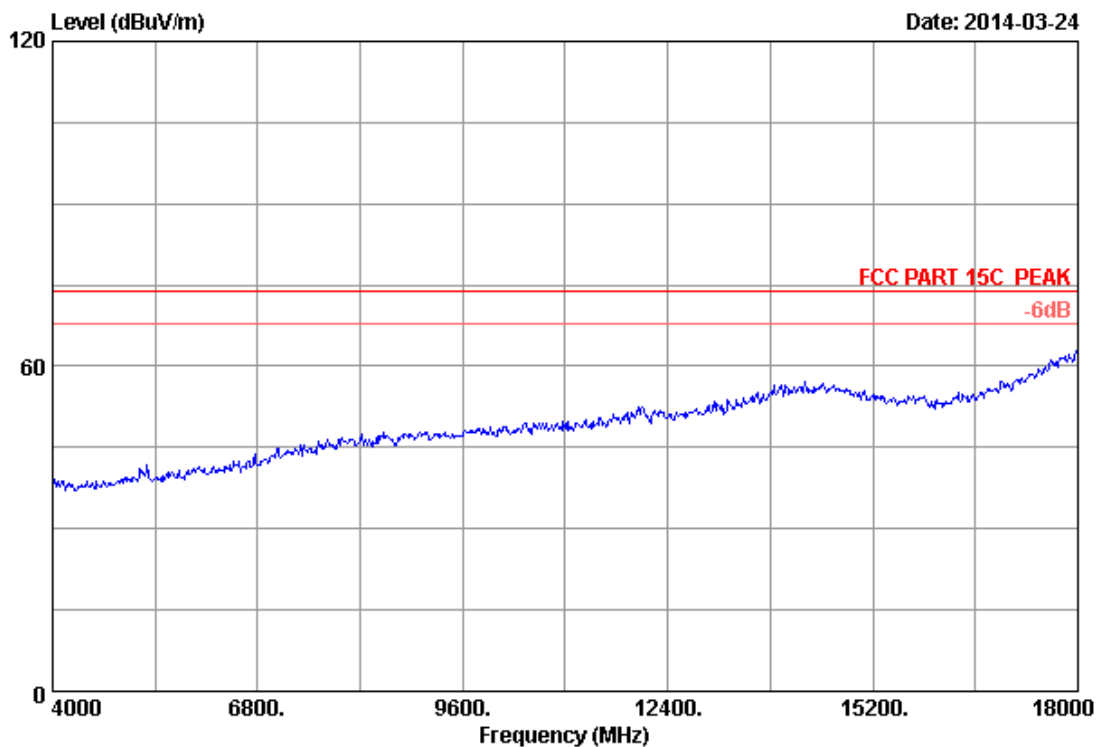

Site no.	: 3m Chamber	Data no.	: 37
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2437MHz Tx		
M/N	: T2U		

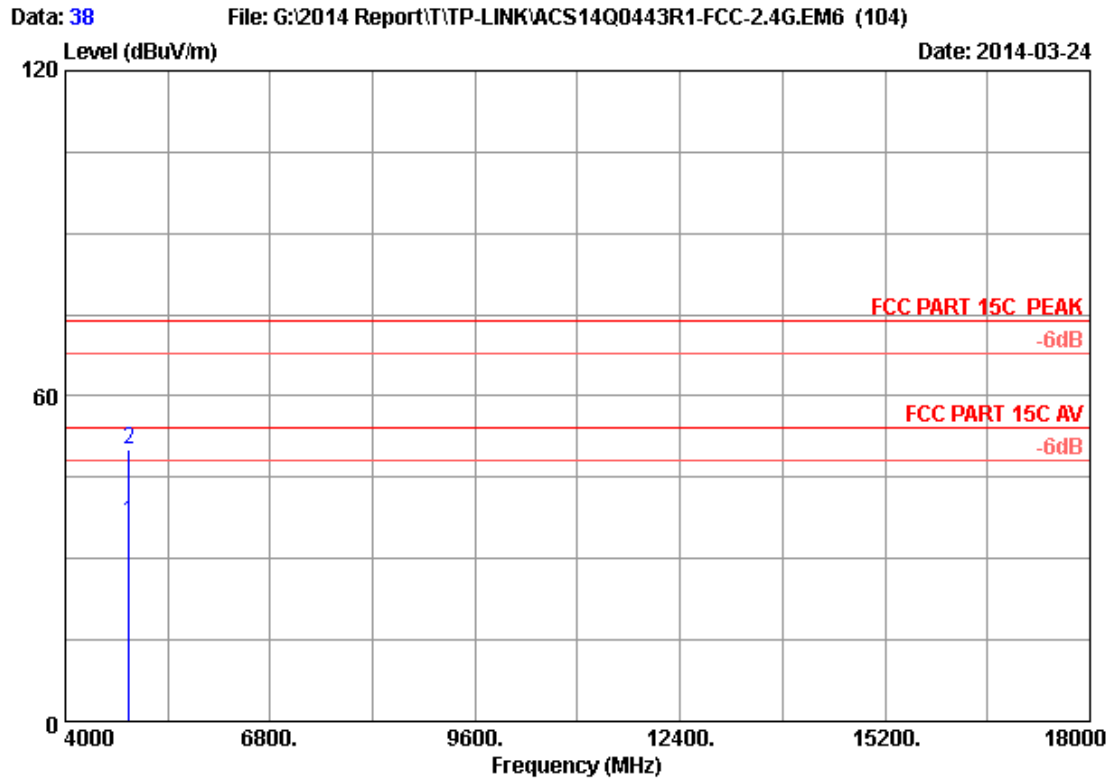

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	30.85	36.75	54.00	17.25	Average
2	4874.000	32.97	8.63	35.70	44.19	50.09	74.00	23.91	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 39

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

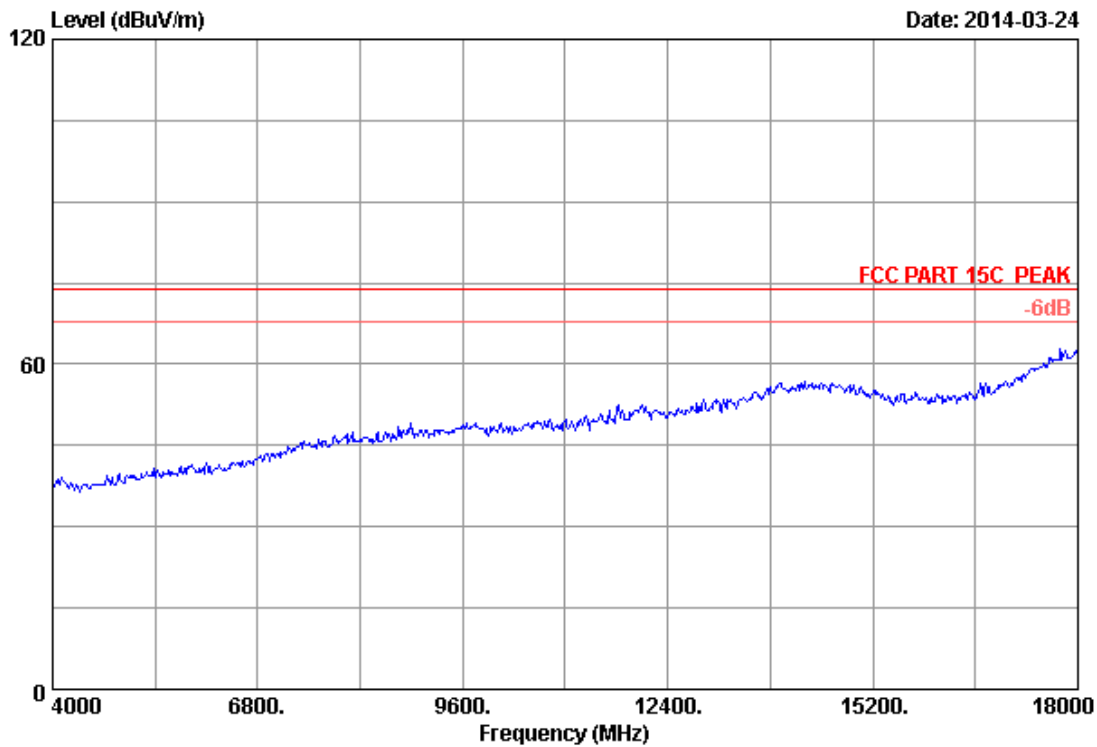


Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : T2U

Data: 40

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

Level (dBuV/m)

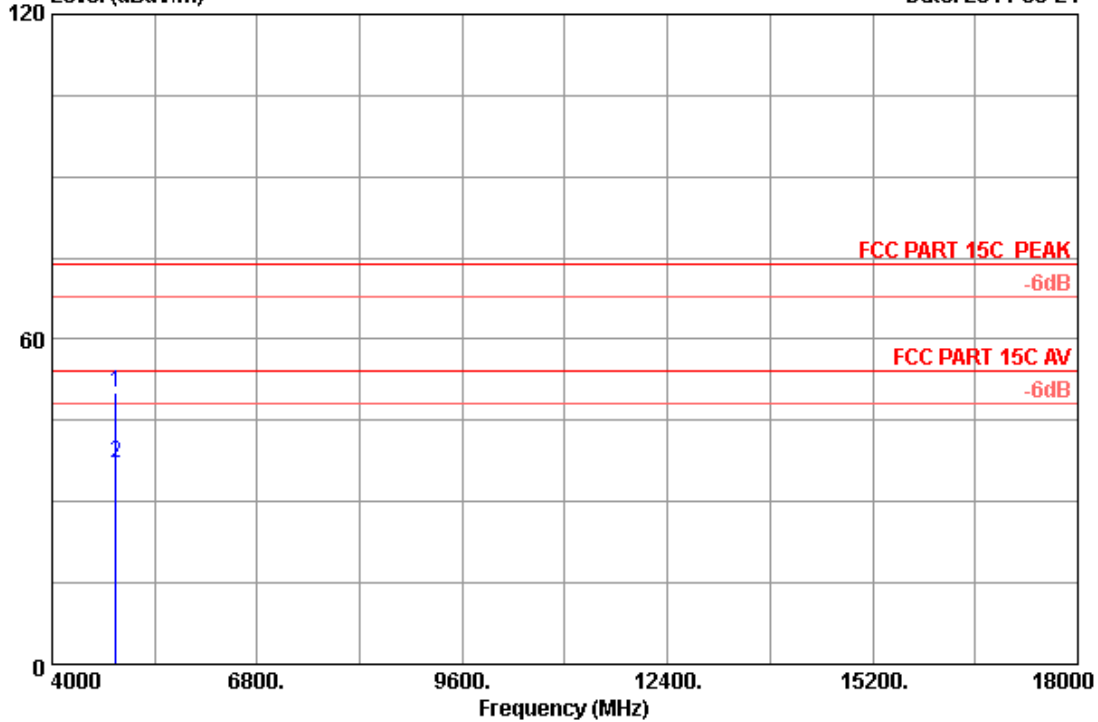

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	44.32	50.22	74.00	23.78	Peak
2	4874.000	32.97	8.63	35.70	31.06	36.96	54.00	17.04	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 41

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)


Date: 2014-03-24

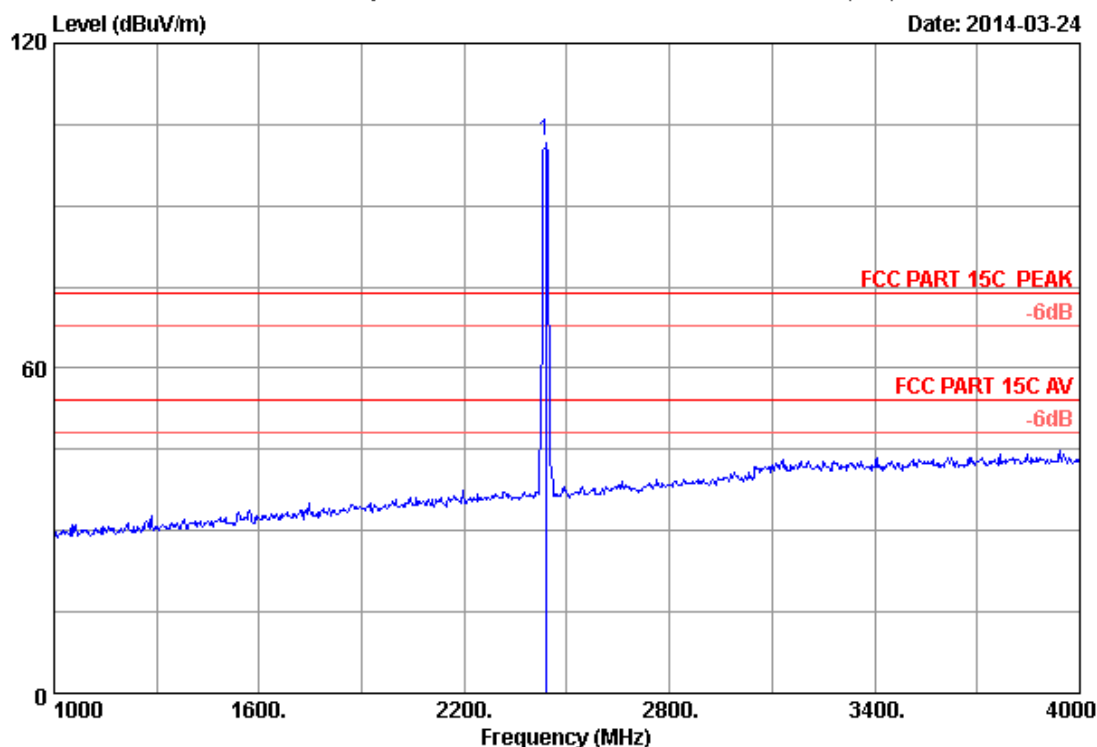

Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	35.70	103.41	101.82	74.00	-27.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

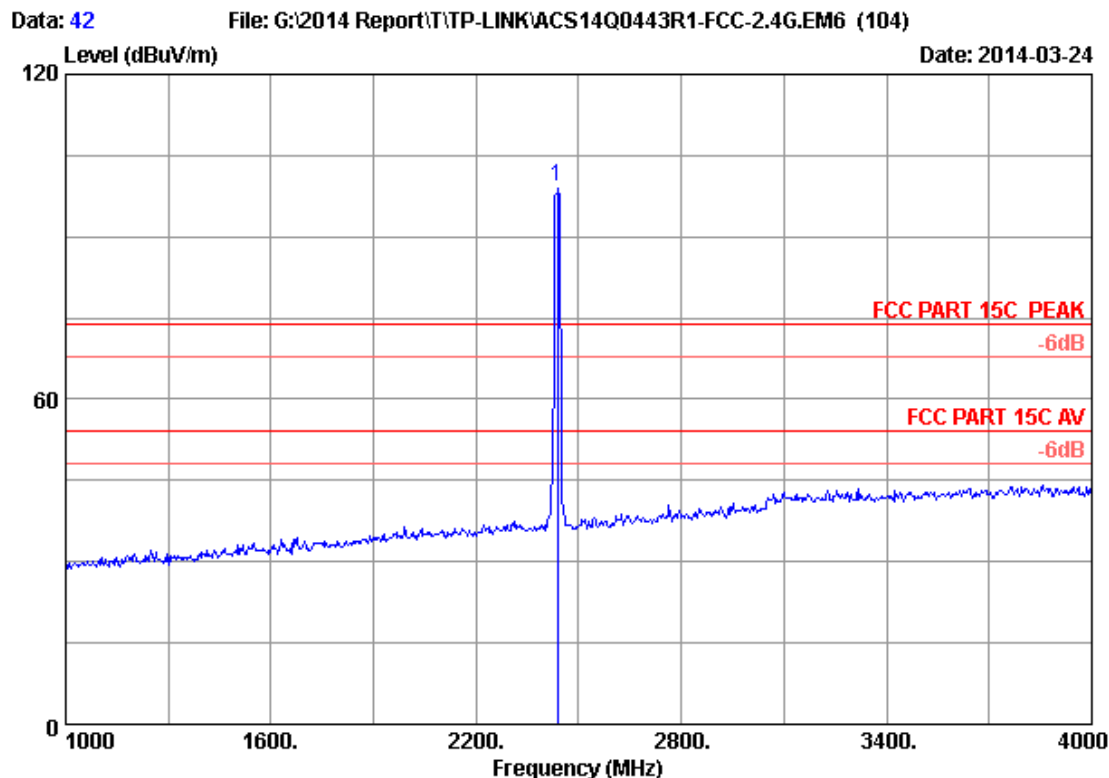

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	35.70	100.76	99.17	74.00	-25.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 43

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

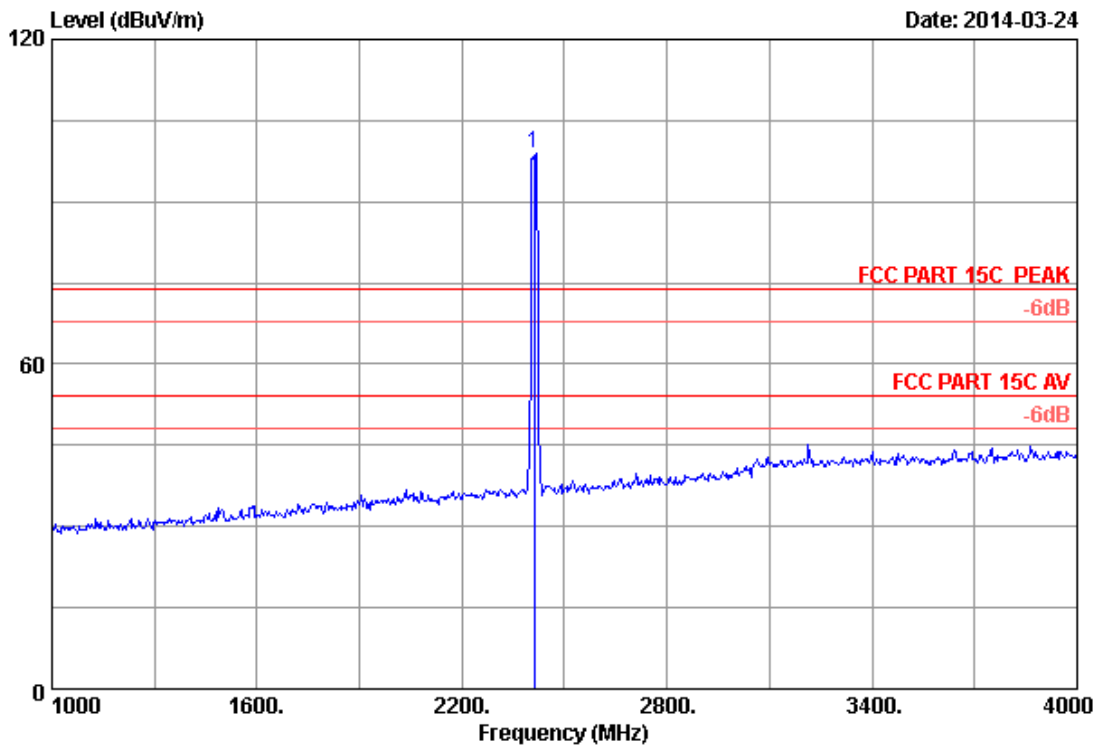

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2412.000	28.21	5.81	35.70	100.66	98.98	74.00	-24.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 44

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

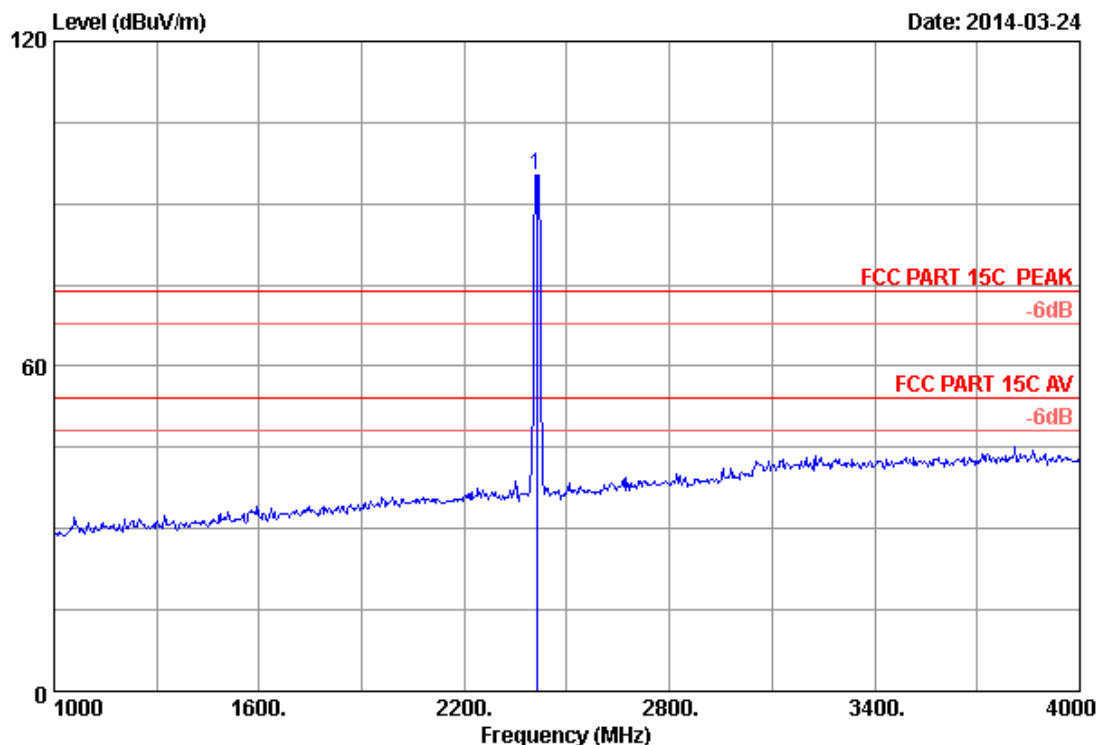

Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.000	28.21	5.81	35.70	96.88	95.20	74.00	-21.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 49

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

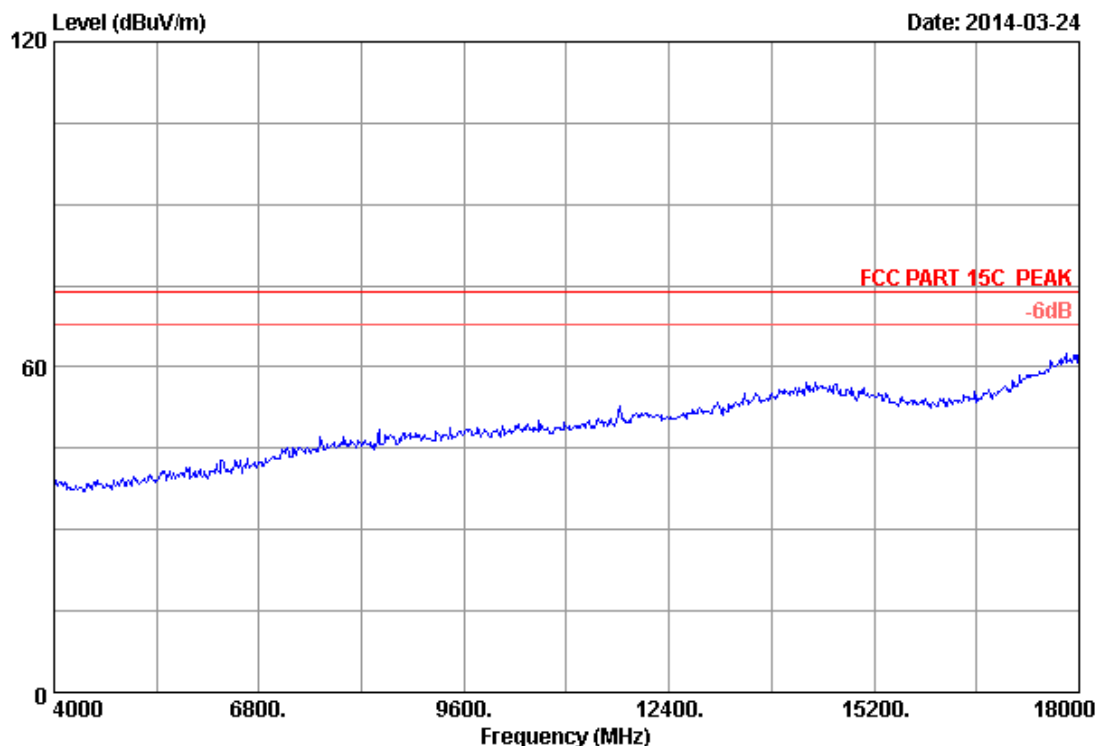


Site no.	: 3m Chamber	Data no.	: 49
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2412MHz Tx		
M/N	: T2U		

Data: 50

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

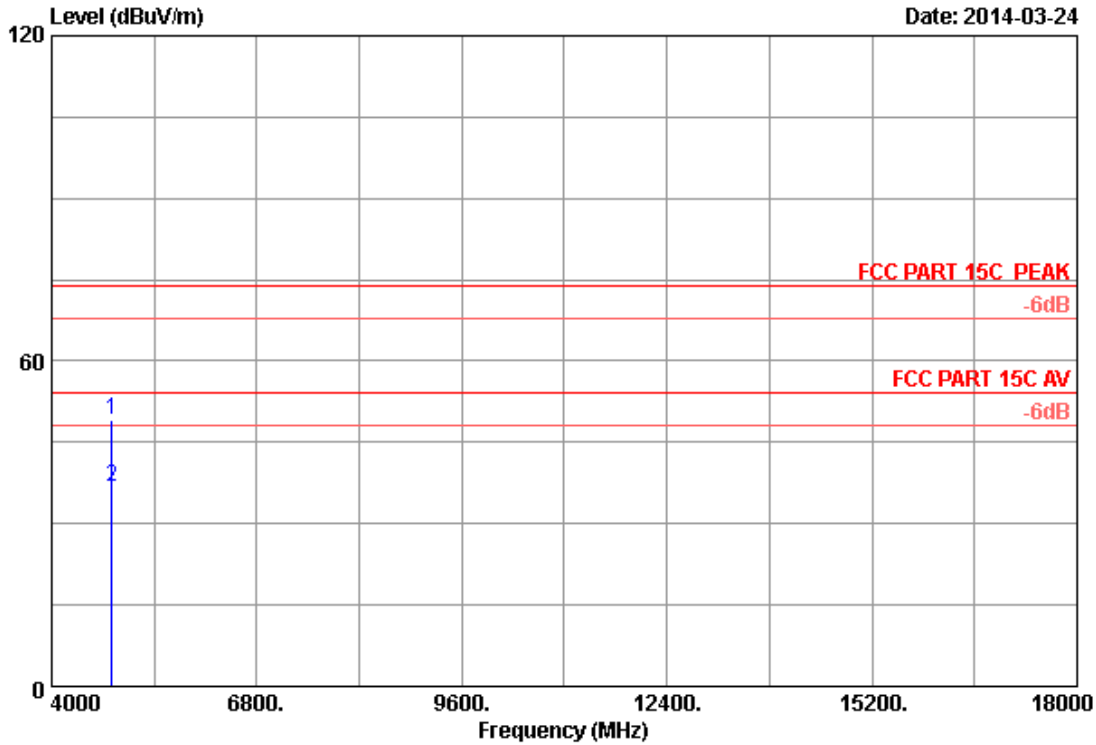

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	43.23	48.99	74.00	25.01	Peak
2	4824.000	32.88	8.58	35.70	31.02	36.78	54.00	17.22	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 51

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

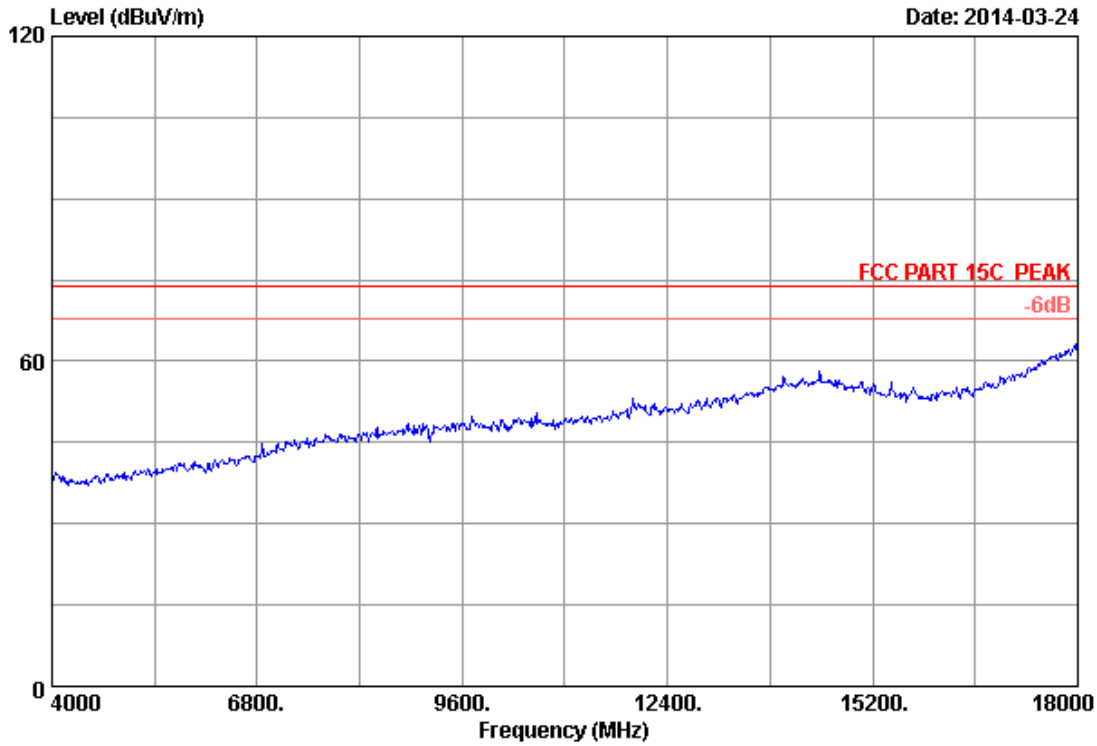


Site no.	: 3m Chamber	Data no.	: 51
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2412MHz Tx		
M/N	: T2U		

Data: 52

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

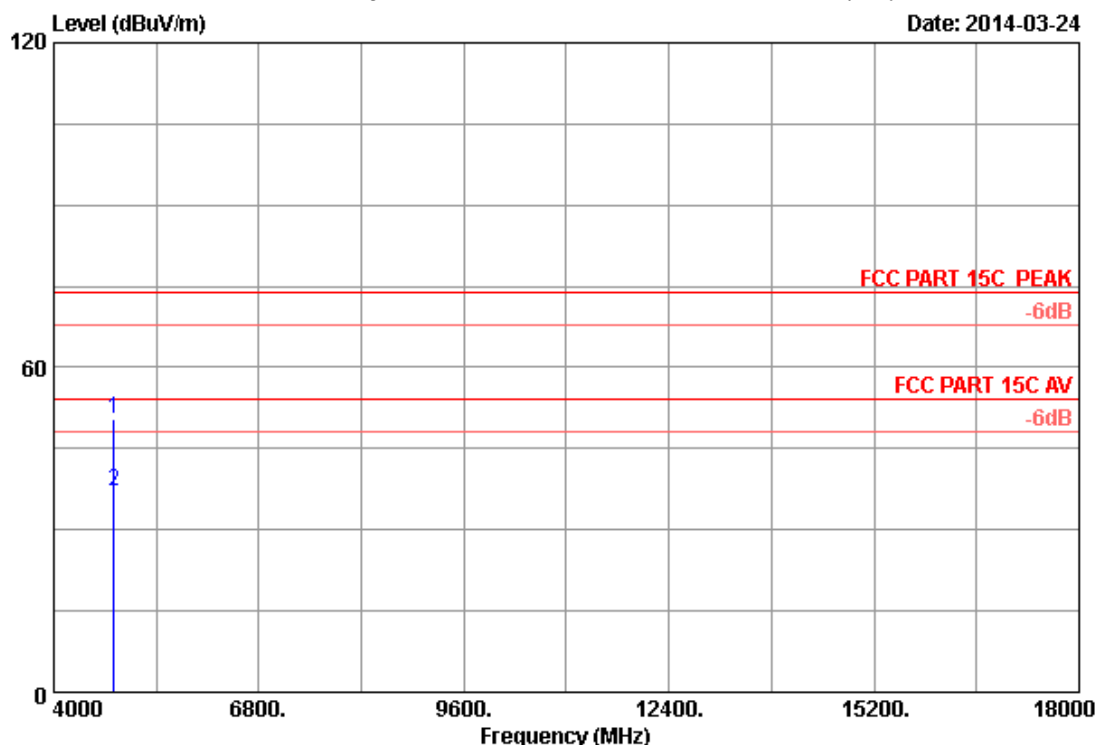

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	44.81	50.57	74.00	23.43	Peak
2	4824.000	32.88	8.58	35.70	31.32	37.08	54.00	16.92	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 53

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

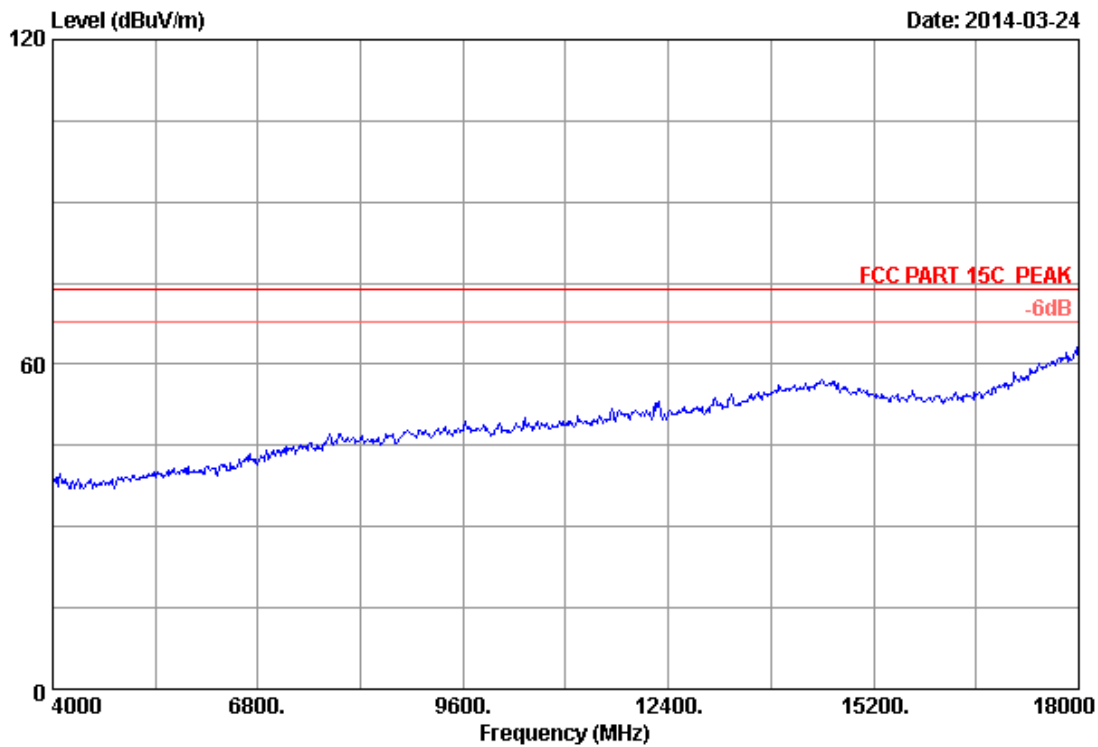

Site no.	: 3m Chamber	Data no.	: 53
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2412MHz Tx		
M/N	: T2U		

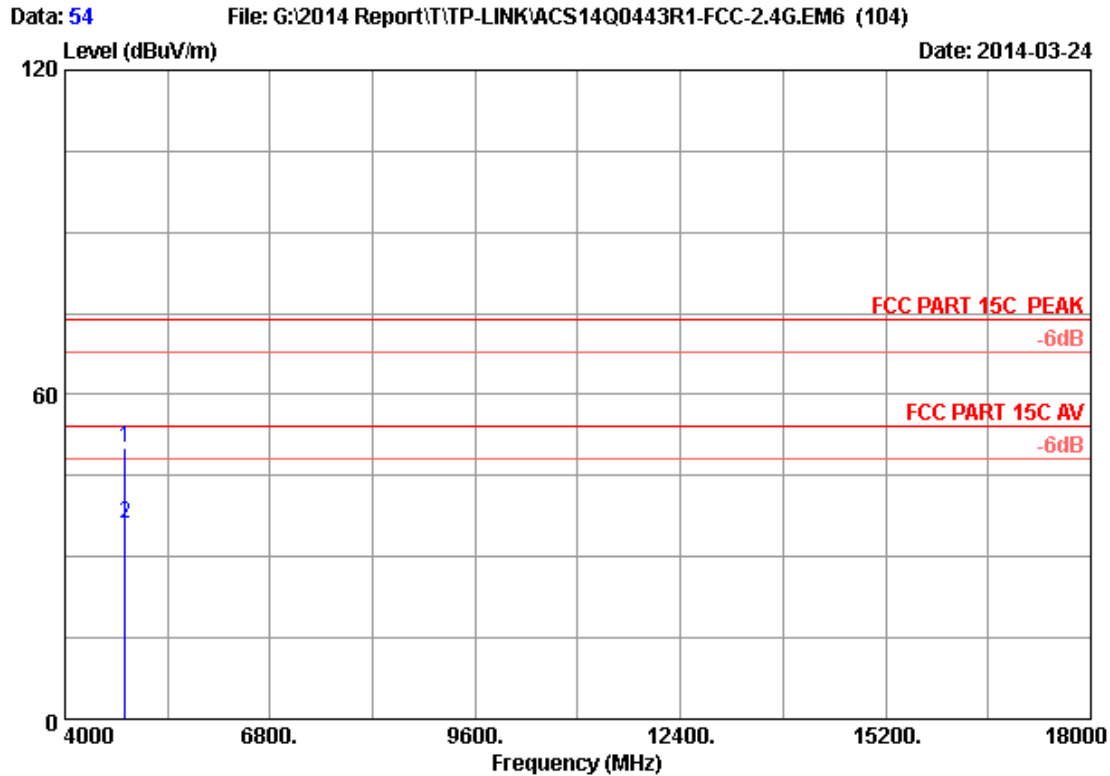

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	44.35	50.11	74.00	23.89	Peak
2	4824.000	32.88	8.58	35.70	30.48	36.24	54.00	17.76	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 55

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

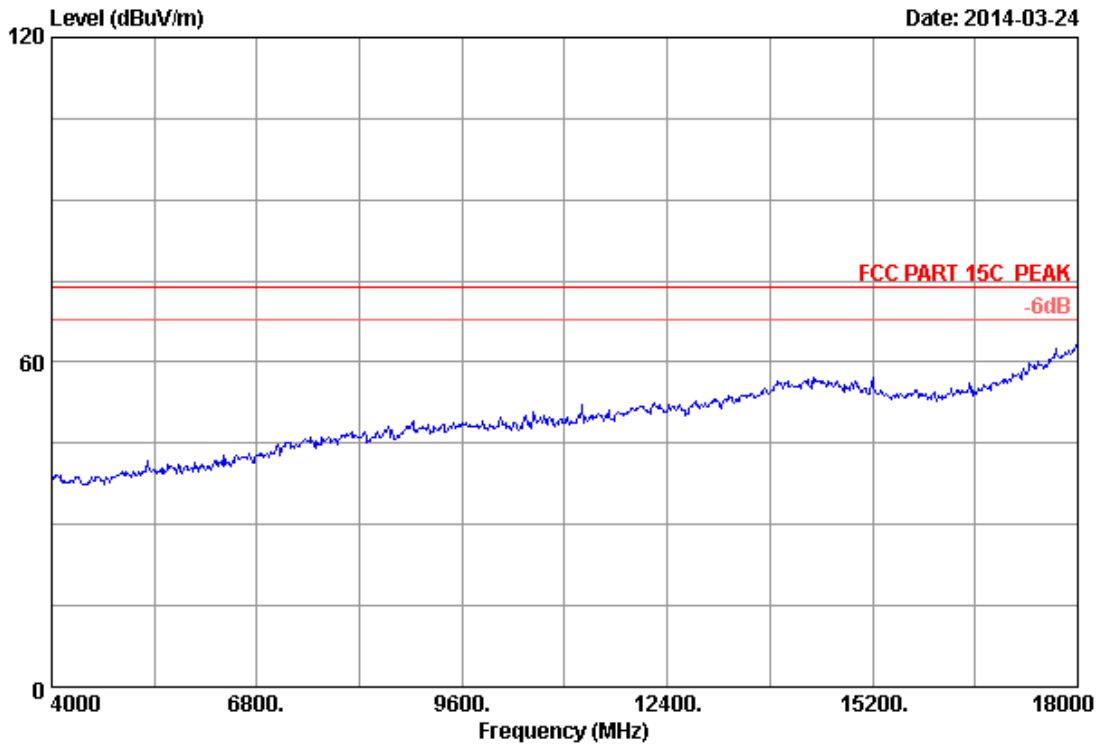


Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : T2U

Data: 56

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)


Date: 2014-03-24

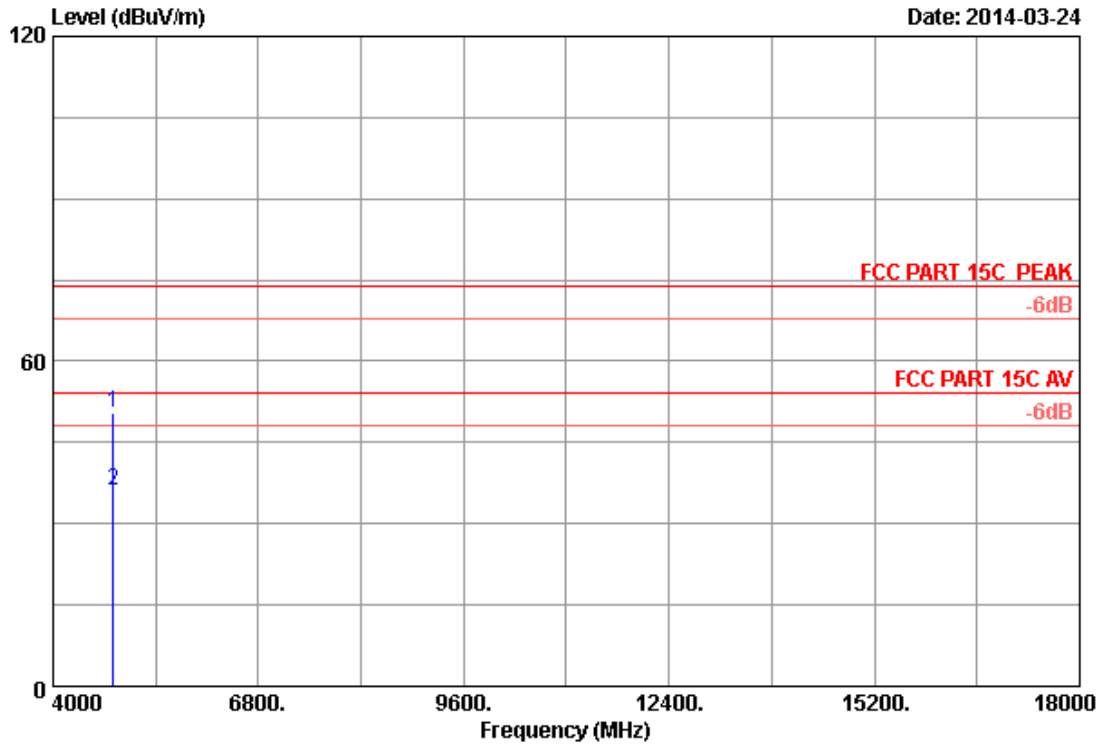

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	44.61	50.37	74.00	23.63	Peak
2	4824.000	32.88	8.58	35.70	30.45	36.21	54.00	17.79	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

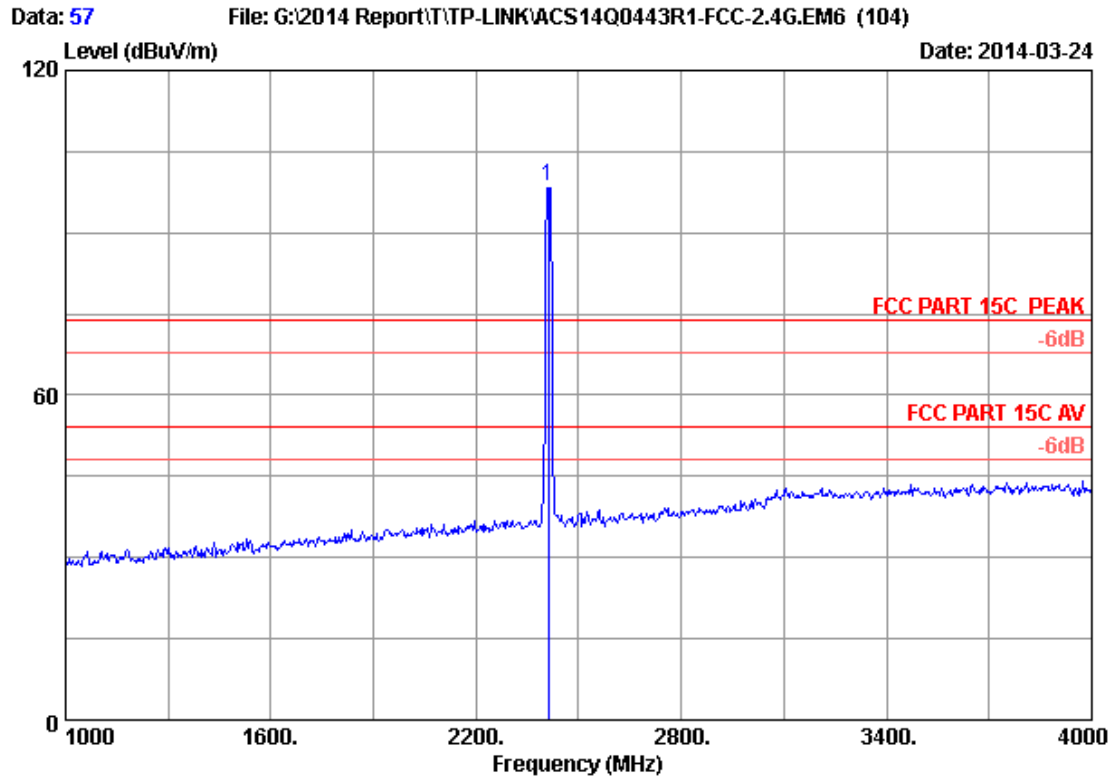

Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.000	28.21	5.81	35.70	100.32	98.64	74.00	-24.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

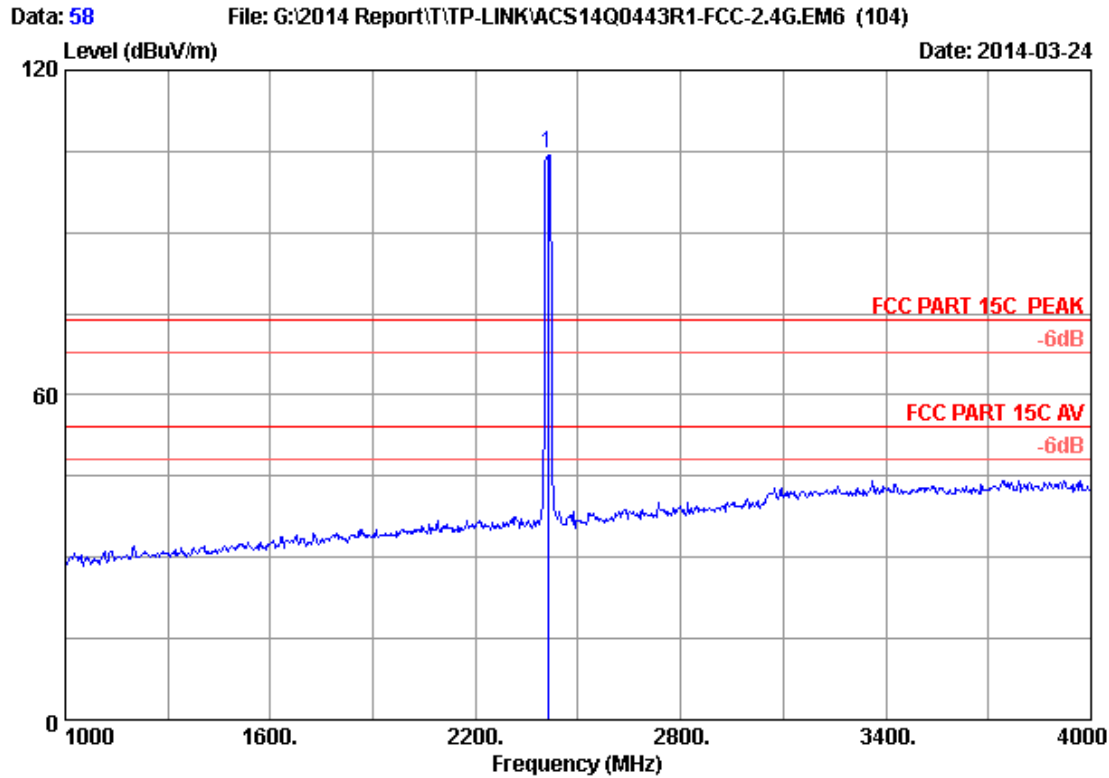

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.000	28.21	5.81	35.70	106.23	104.55	74.00	-30.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 63

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)


Date: 2014-03-24

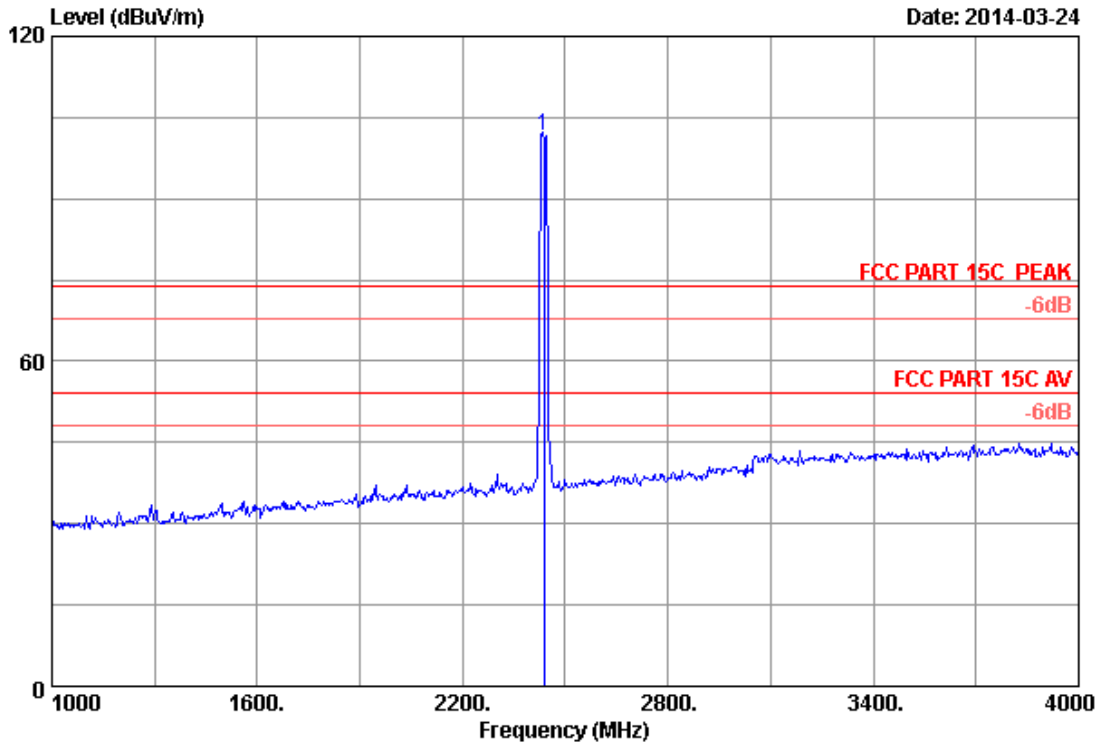

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2437.000	28.26	5.85	35.70	103.34	101.75	74.00	-27.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

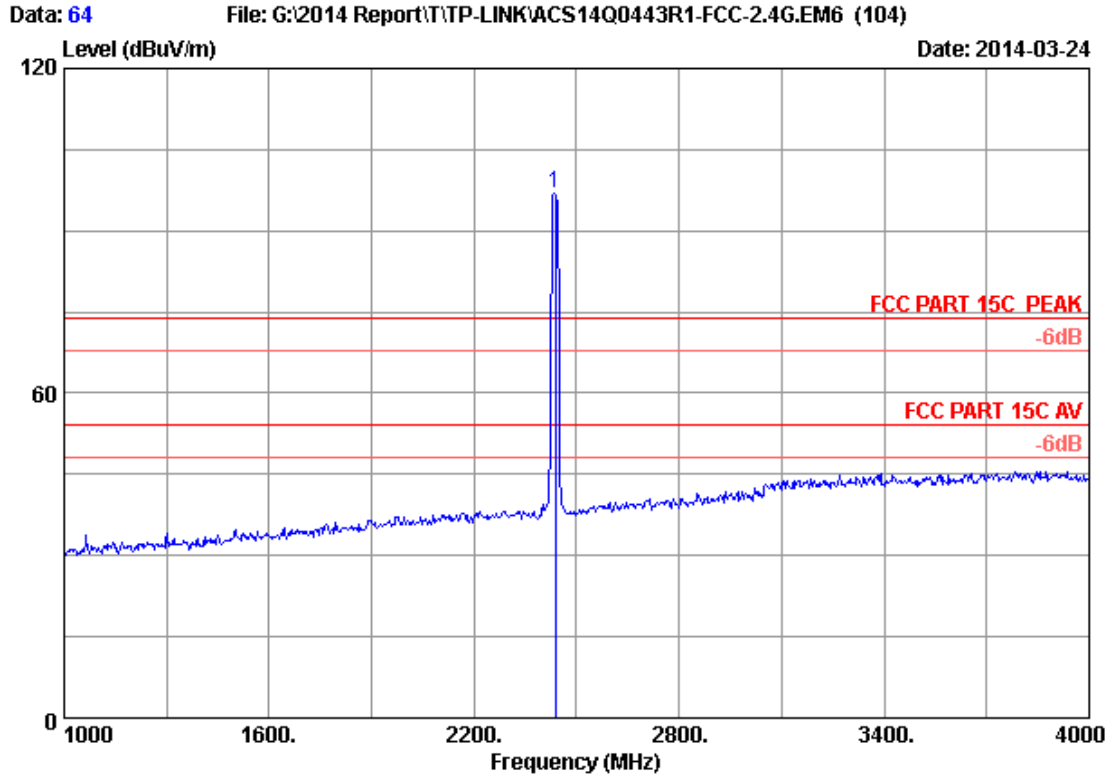

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Cable AMP			Reading (dBuV)	Emission			Margin Remark
		Factor (dB/m)	Loss (dB)	factor (dB)		Level (dBuV/m)	Limits (dBuV/m)		
1	2437.000	28.26	5.85	35.70	98.65	97.06	74.00	-23.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 65

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

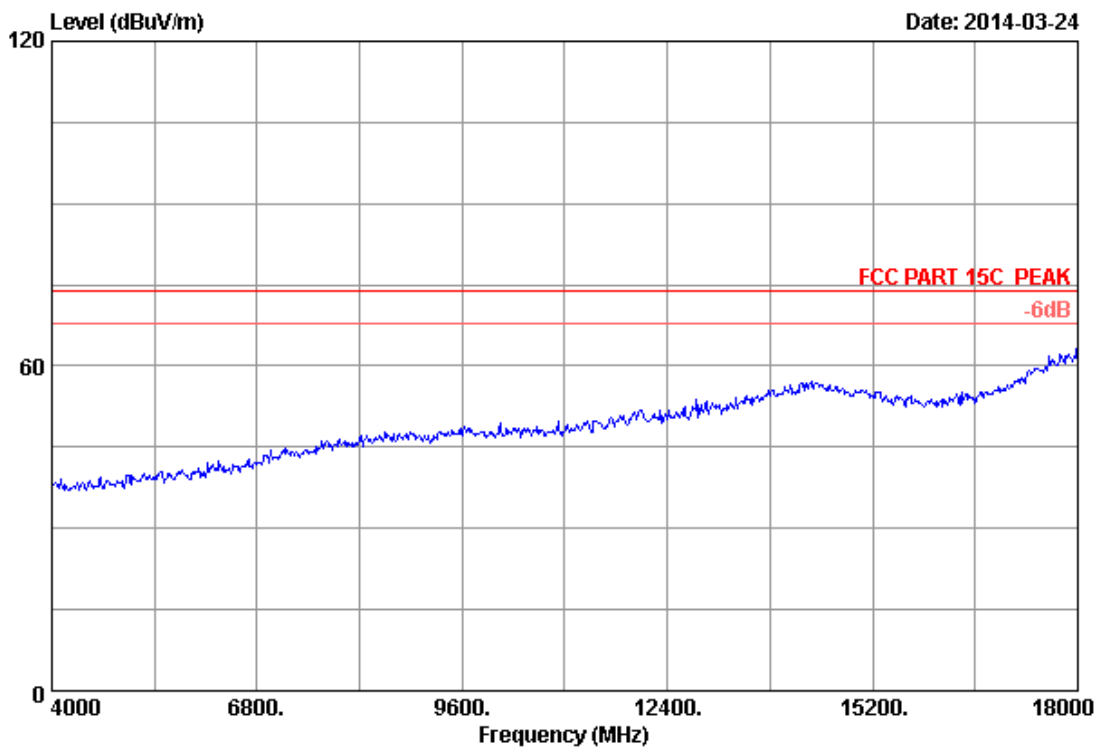


Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2437MHz Tx		
M/N	: T2U		

Data: 66

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

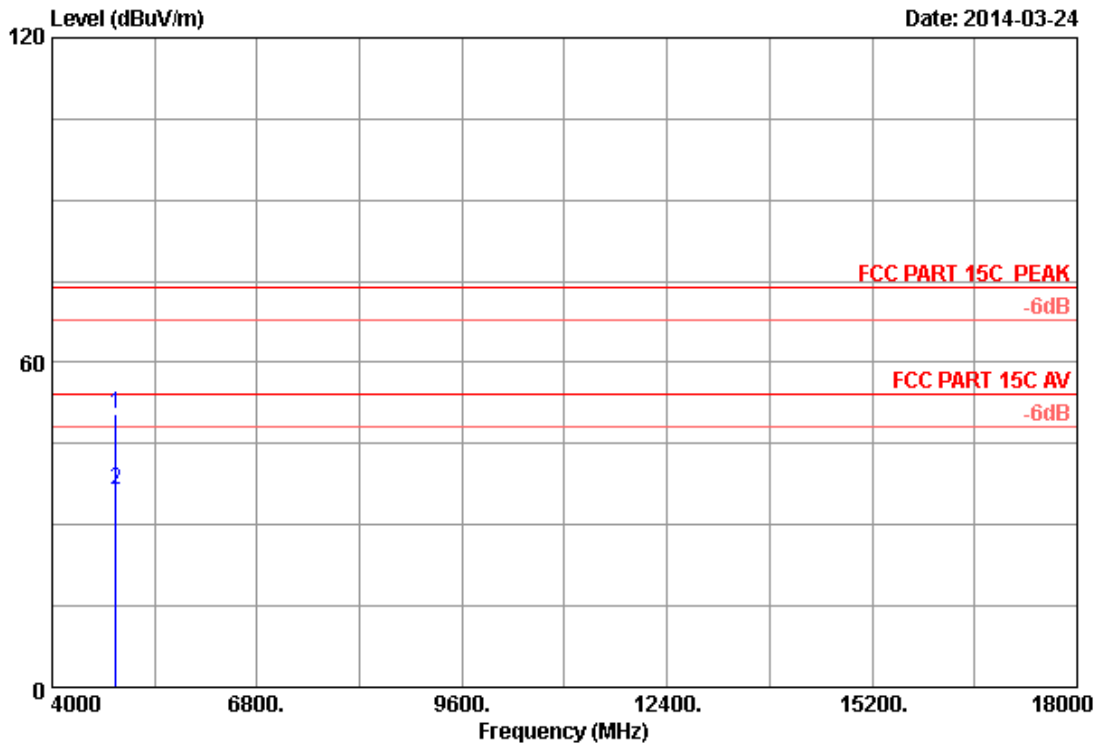

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	44.43	50.33	74.00	23.67	Peak
2	4874.000	32.97	8.63	35.70	30.52	36.42	54.00	17.58	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 67

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

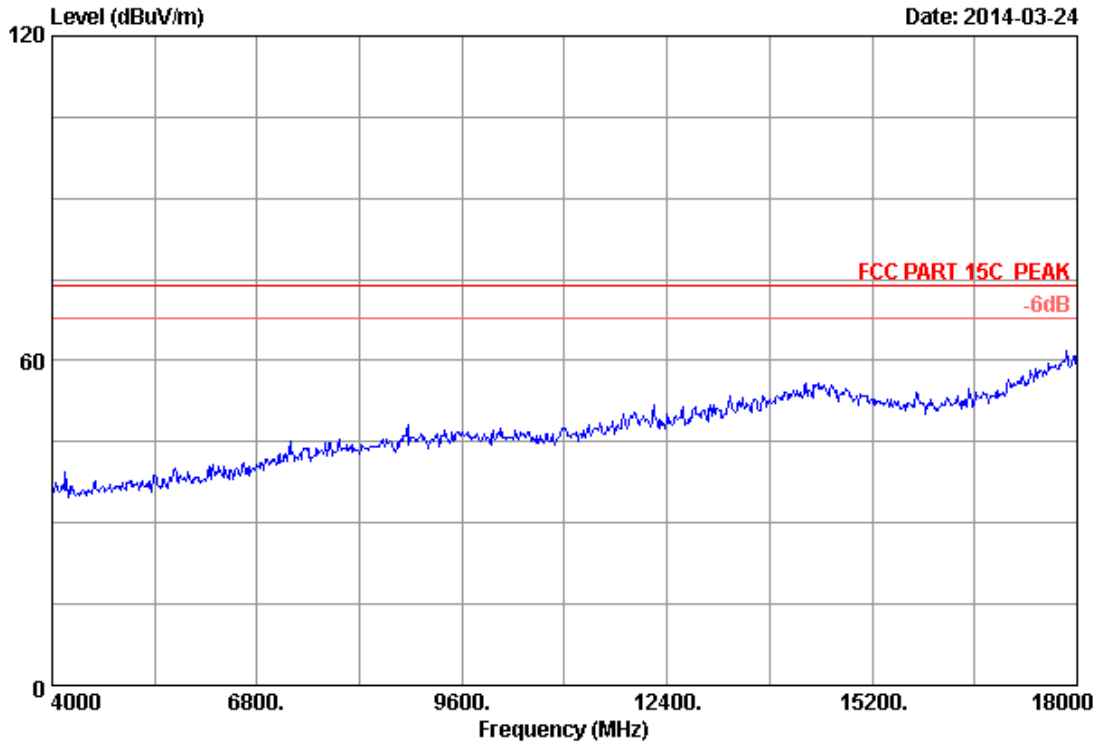


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 M/N : T2U

Data: 68

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

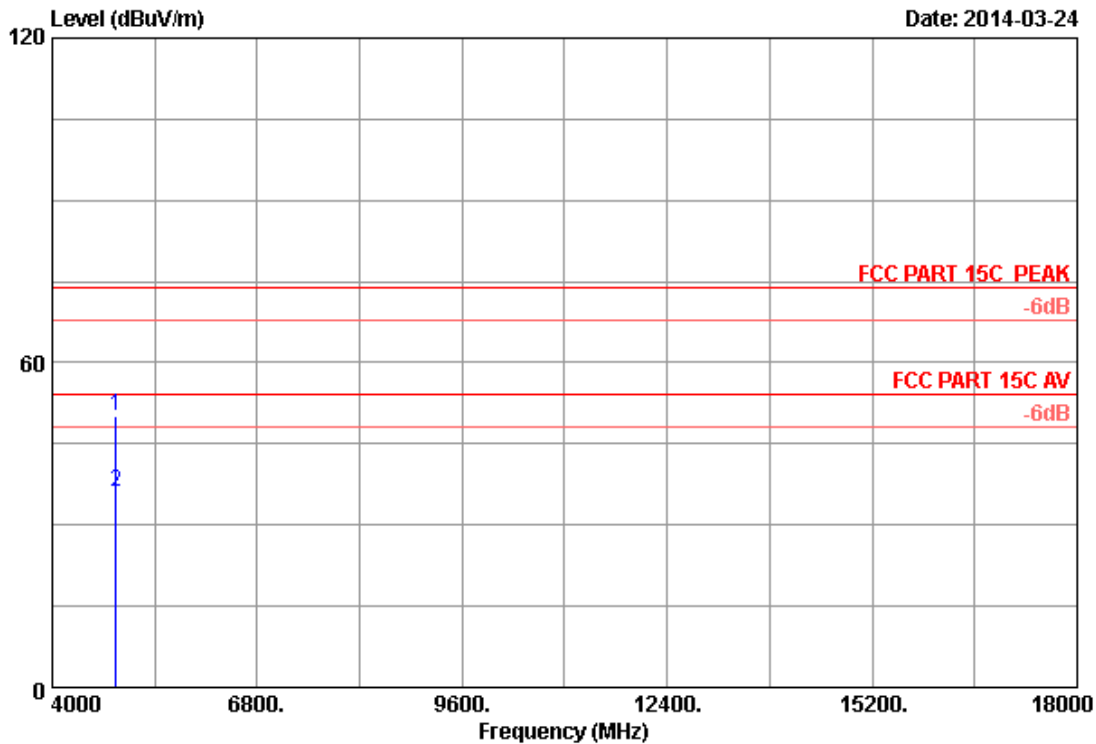

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	44.22	50.12	74.00	23.88	Peak
2	4874.000	32.97	8.63	35.70	30.04	35.94	54.00	18.06	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 69

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

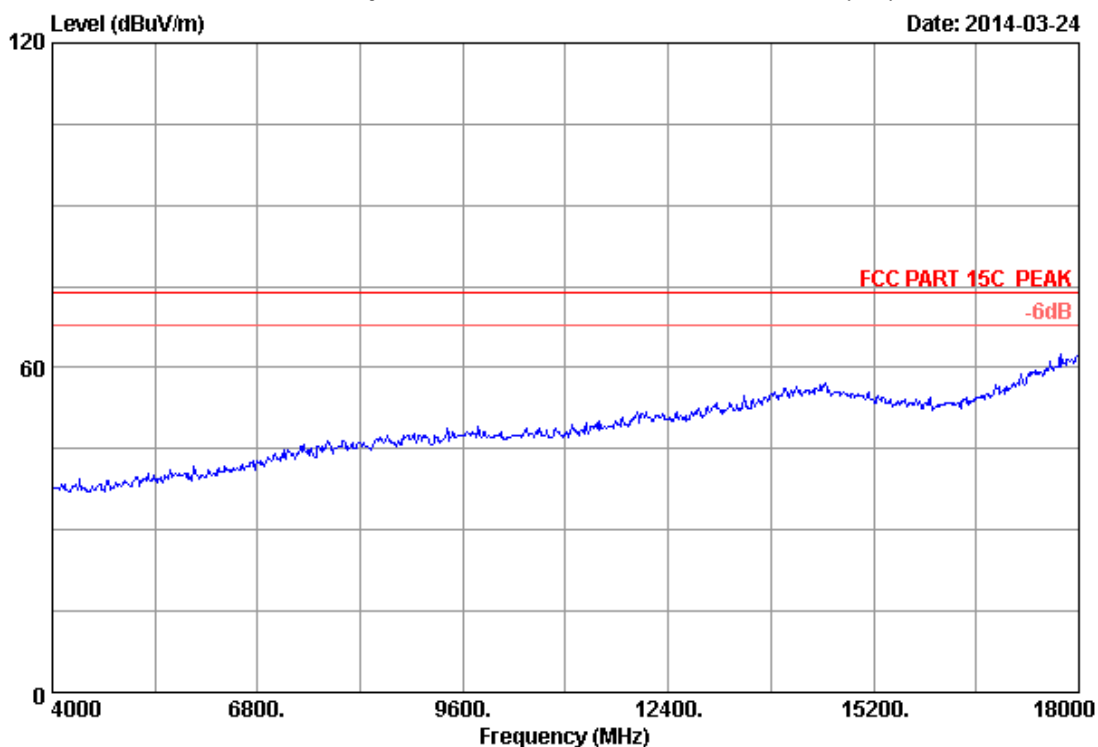

Site no.	: 3m Chamber	Data no.	: 69
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2462MHz Tx		
M/N	: T2U		

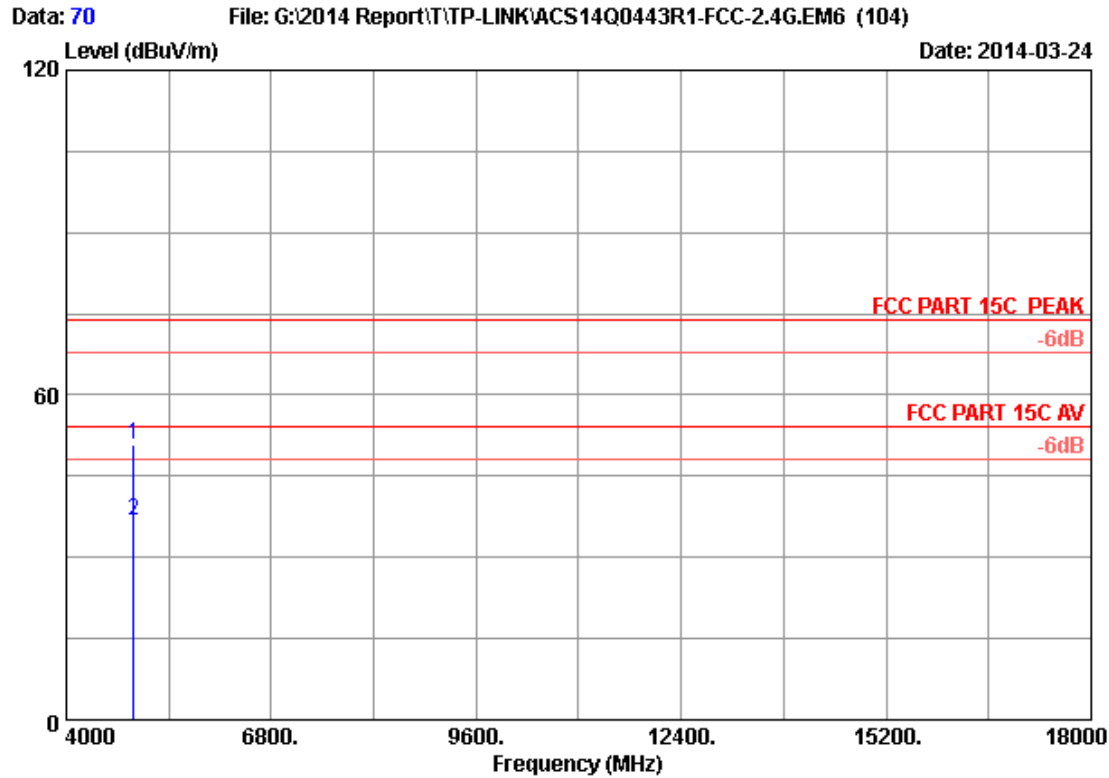

Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	44.73	50.78	74.00	23.22	Peak
2	4924.000	33.06	8.69	35.70	30.57	36.62	54.00	17.38	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 71

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

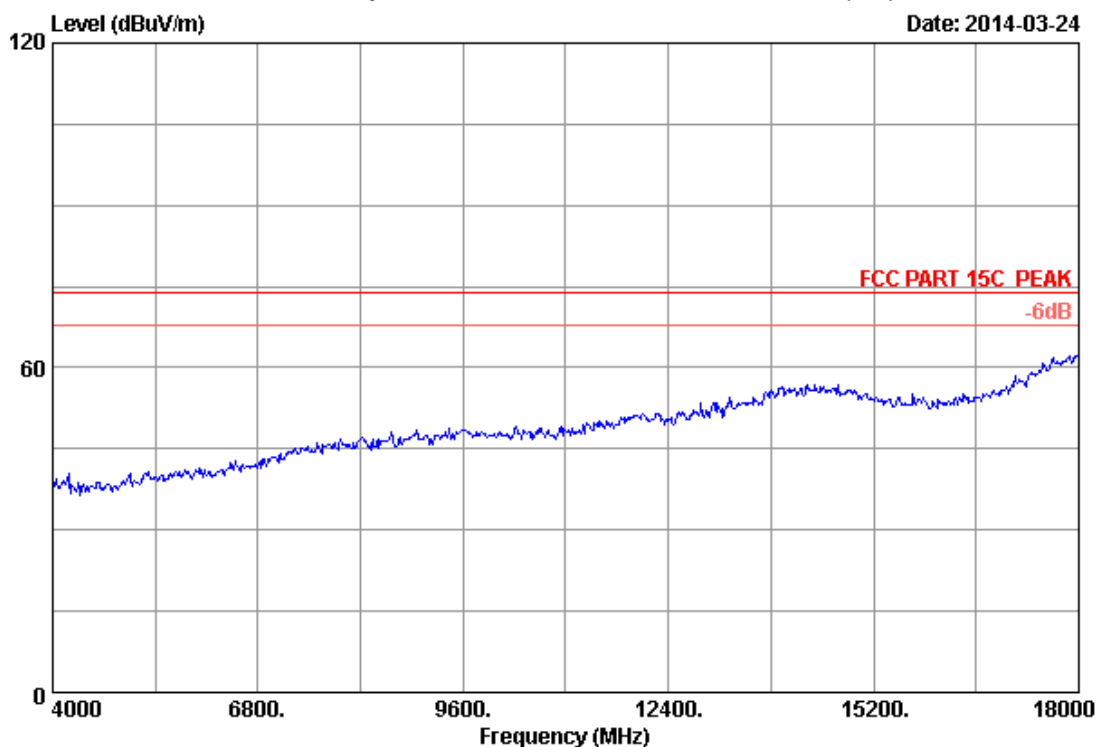


Site no.	: 3m Chamber	Data no.	: 71
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2462MHz Tx		
M/N	: T2U		

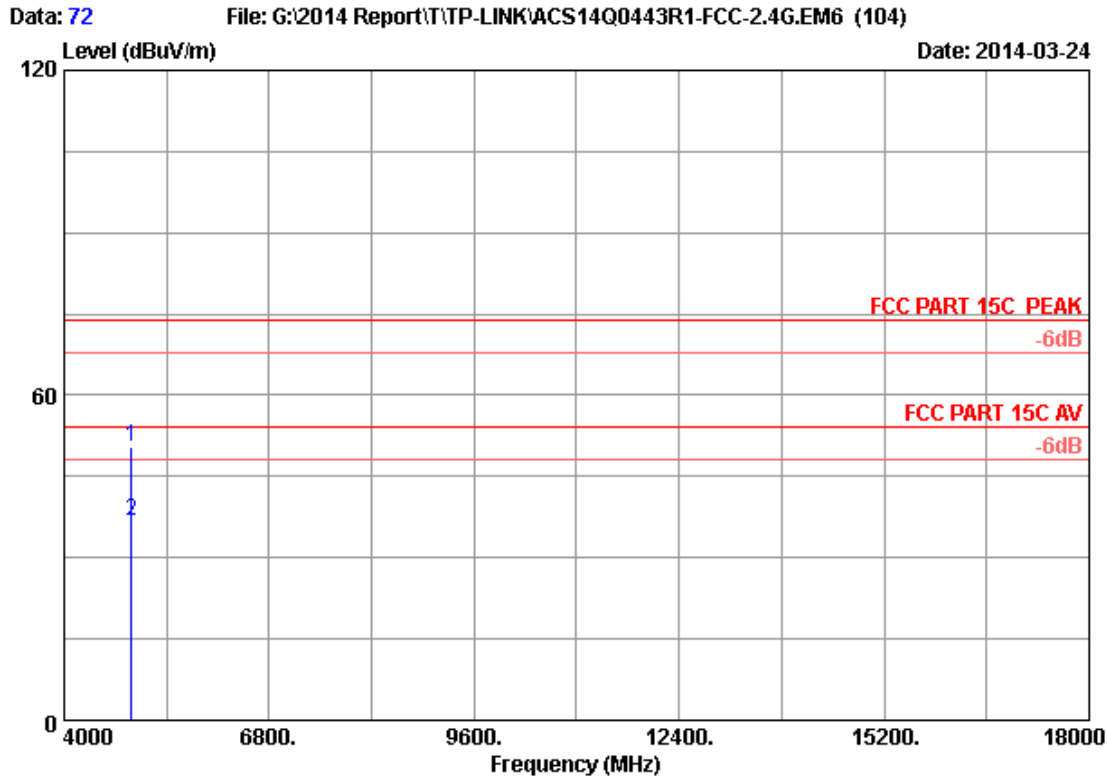

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	44.35	50.40	74.00	23.60	Peak
2	4924.000	33.06	8.69	35.70	30.68	36.73	54.00	17.27	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

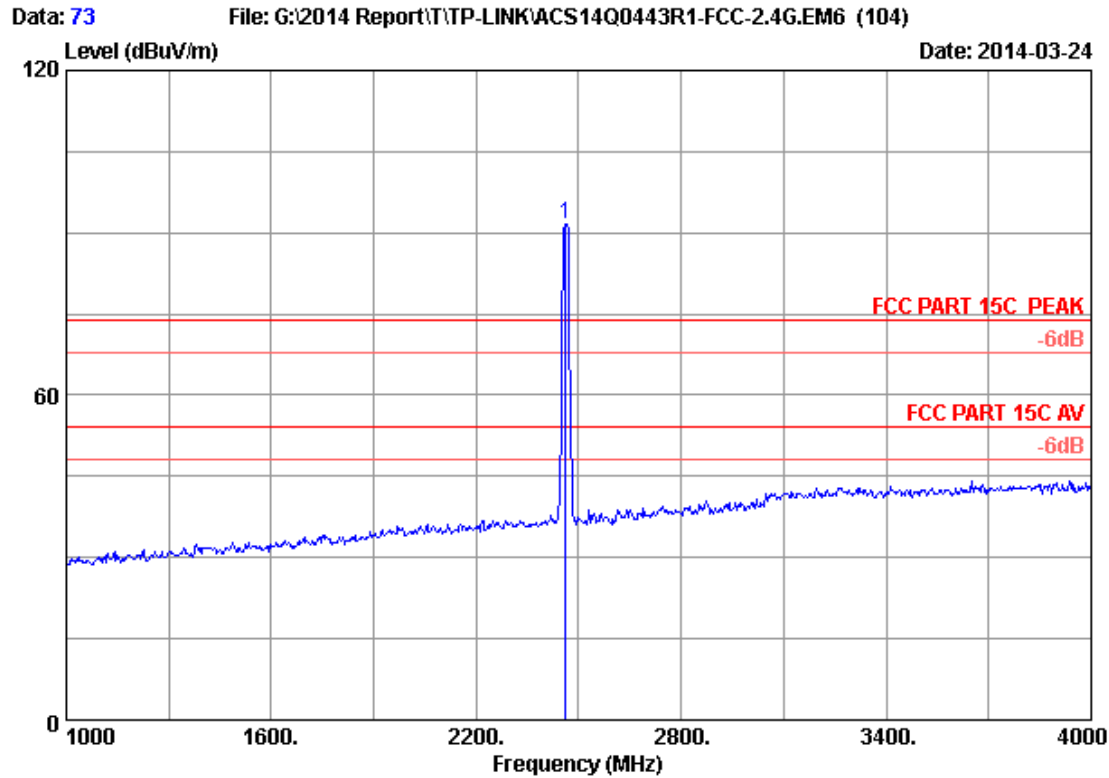

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.000	28.32	5.89	35.70	93.20	91.71	74.00	-17.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

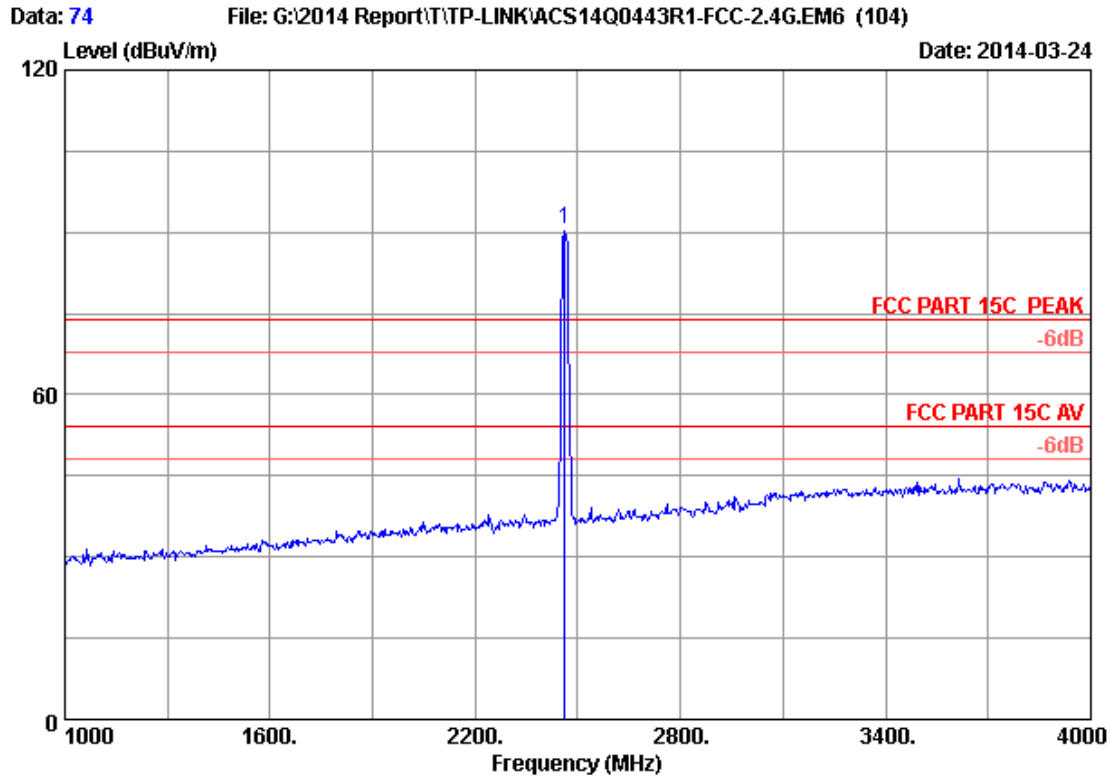

Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2462.000	28.32	5.89	35.70	92.11	90.62	74.00	-16.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

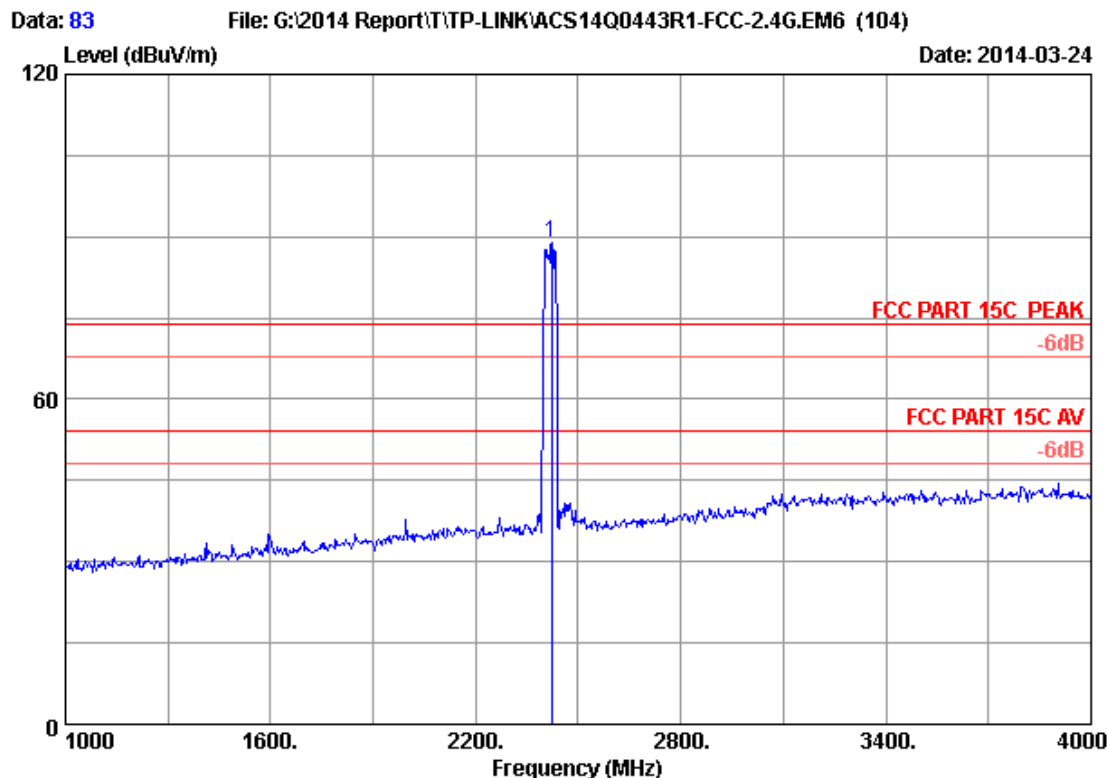

Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	
1	2422.000	28.23	5.83	35.70	90.58	88.94	74.00	-14.94	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

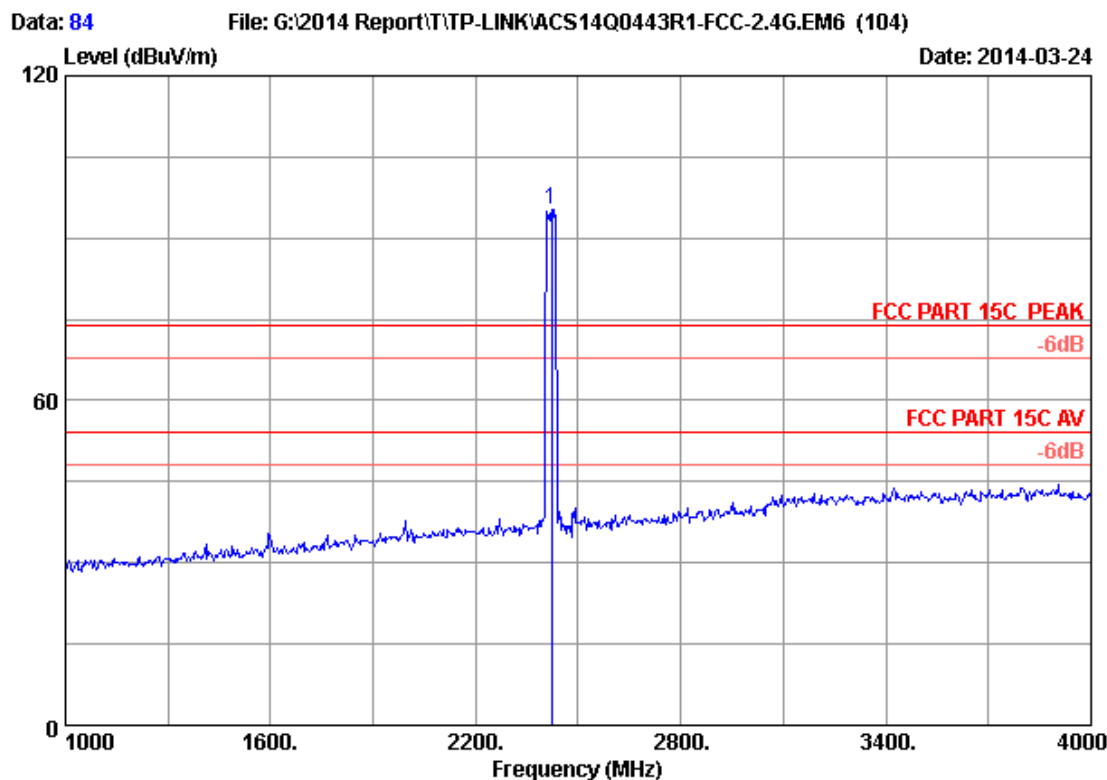

Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2422.000	28.23	5.83	35.70	96.86	95.22	74.00	-21.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 85

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

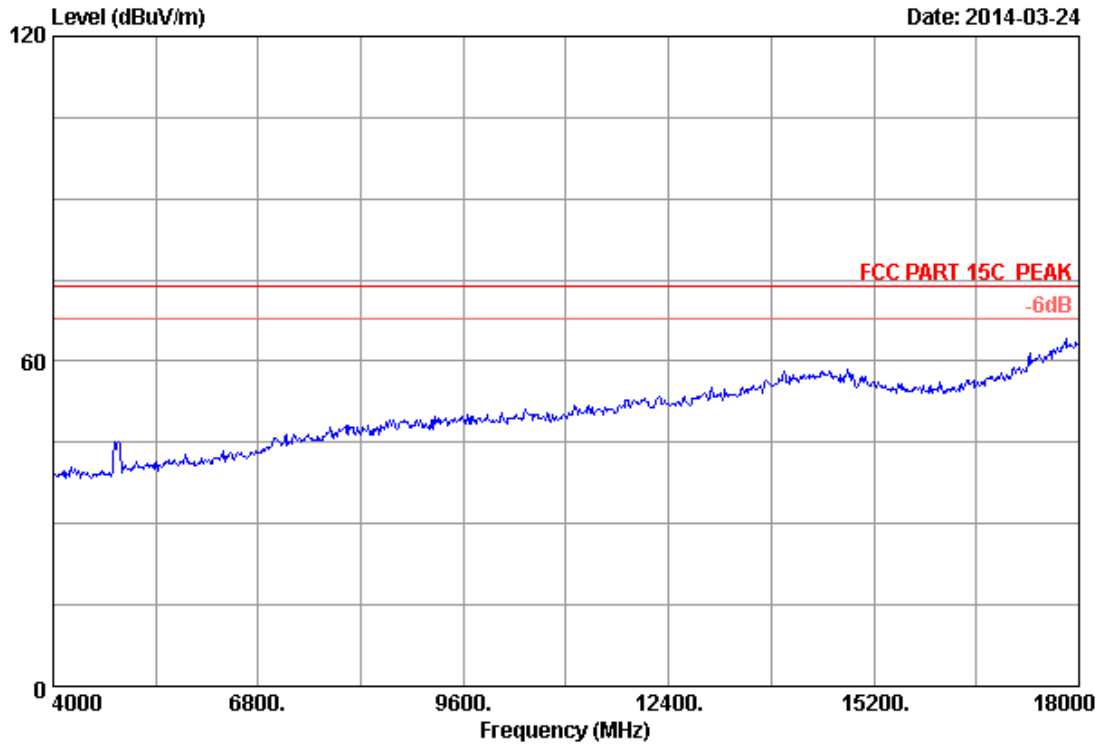


Site no.	: 3m Chamber	Data no.	: 85
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT40 2422MHz Tx		
M/N	: T2U		

Data: 86

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

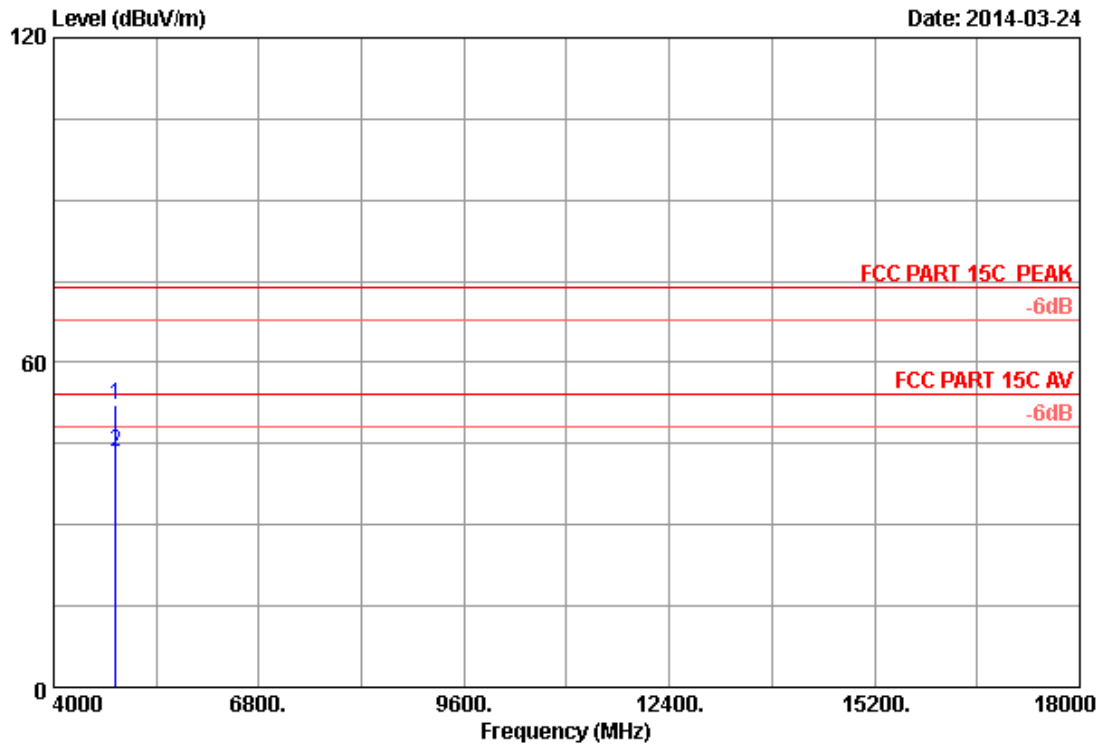

Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	32.92	8.60	35.70	46.25	52.07	74.00	21.93	Peak
2	4844.000	32.92	8.60	35.70	37.68	43.50	54.00	10.50	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 87

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

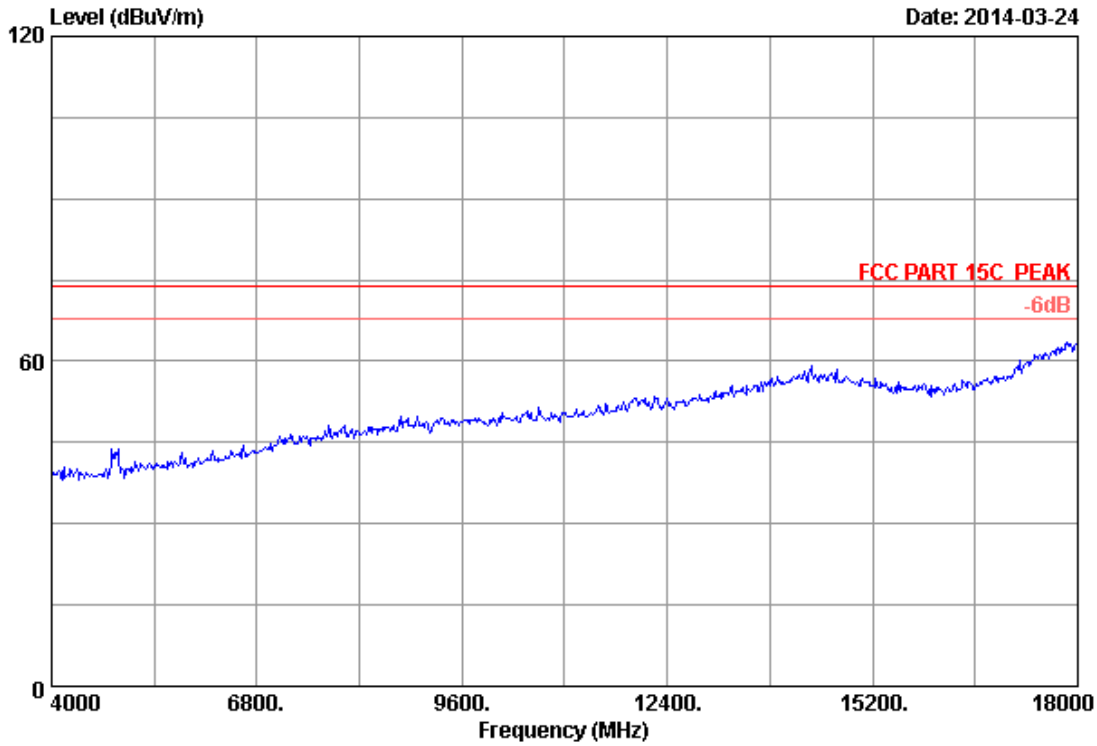

Site no.	: 3m Chamber	Data no.	: 87
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT40 2422MHz Tx		
M/N	: T2U		

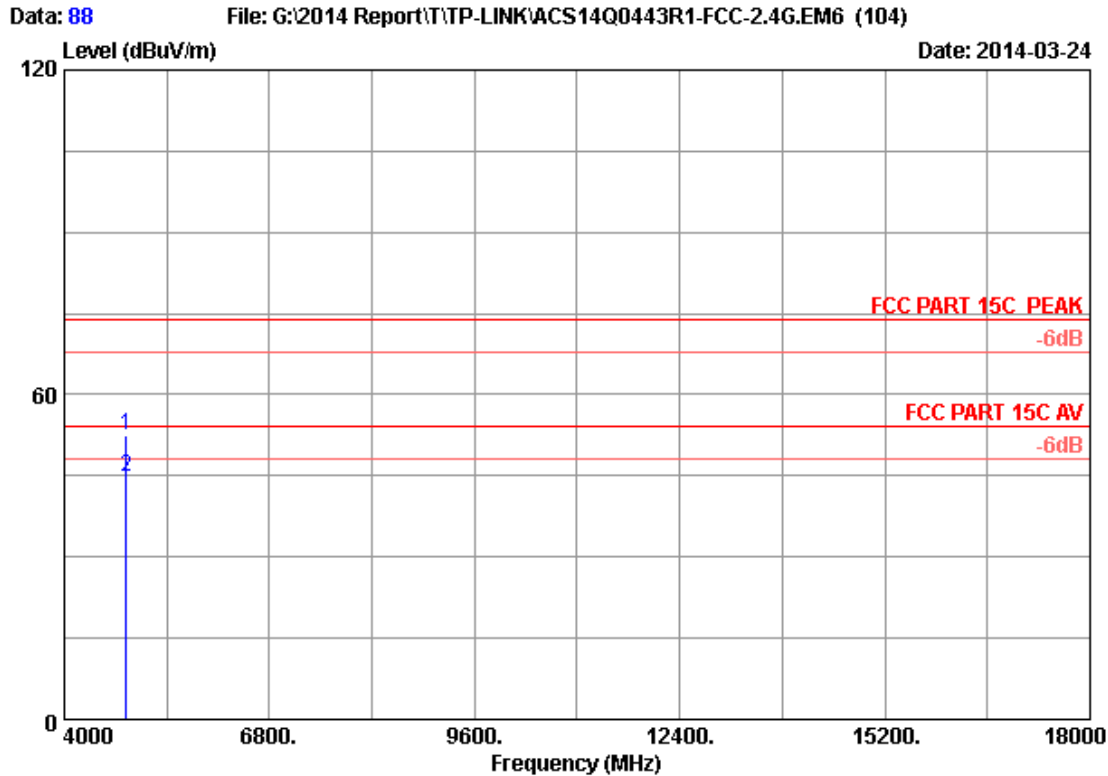

Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	32.92	8.60	35.70	46.54	52.36	74.00	21.64	Peak
2	4844.000	32.92	8.60	35.70	38.96	44.78	54.00	9.22	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 89

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

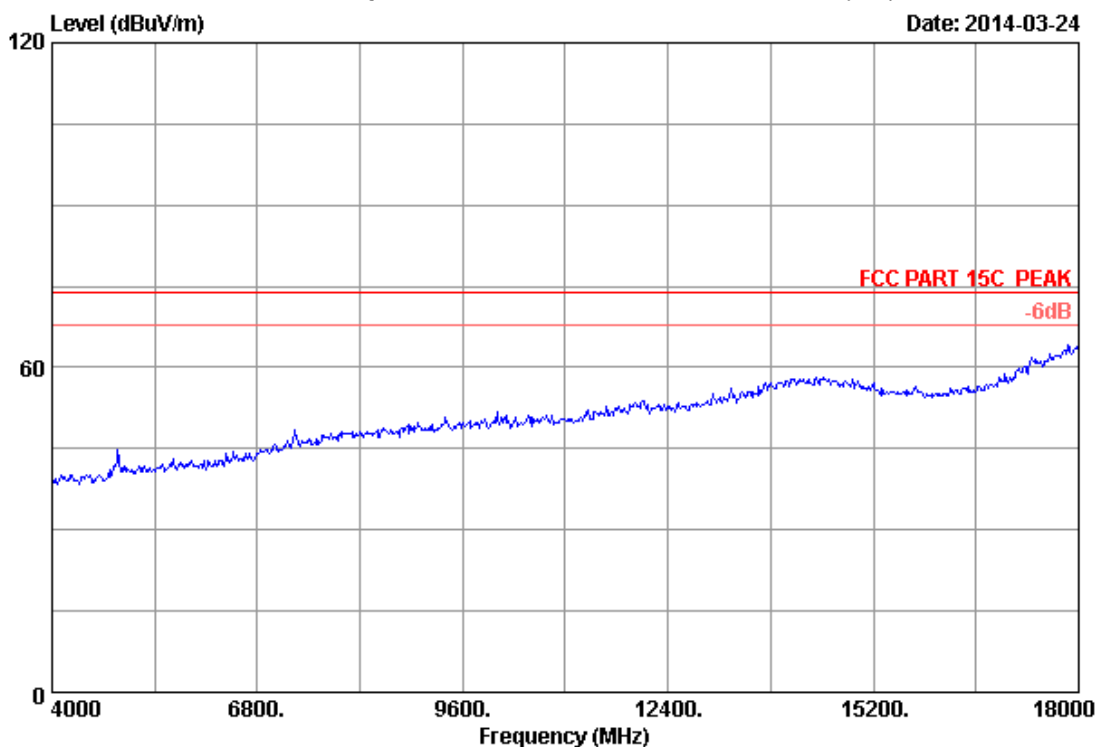


Site no.	: 3m Chamber	Data no.	: 89
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT40 2437MHz Tx		
M/N	: T2U		

Data: 90

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

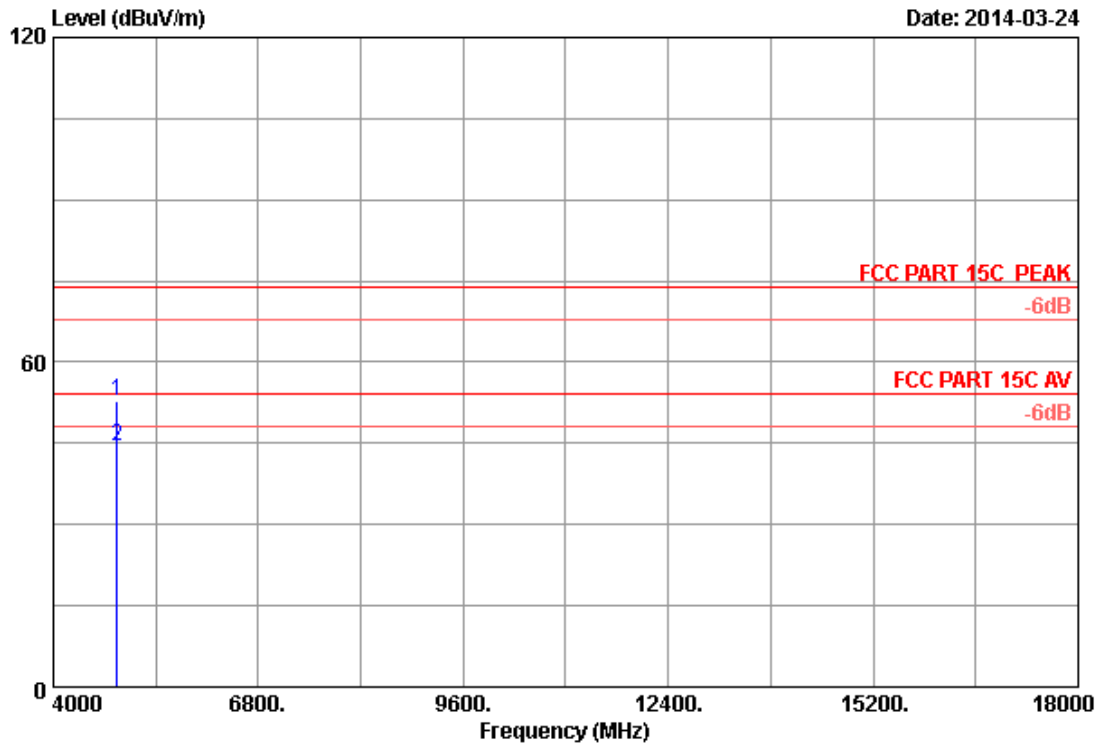

Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	46.76	52.66	74.00	21.34	Peak
2	4874.000	32.97	8.63	35.70	38.56	44.46	54.00	9.54	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 91

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

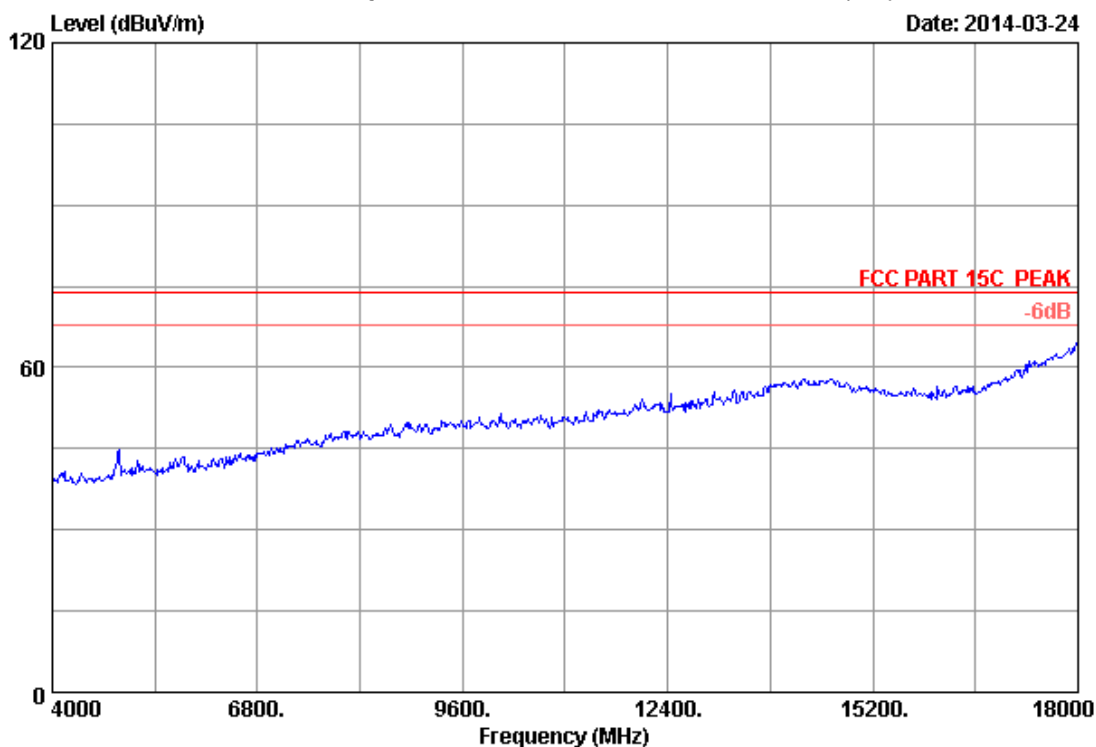


Site no.	: 3m Chamber	Data no.	: 91
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT40 2437MHz Tx		
M/N	: T2U		

Data: 92

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

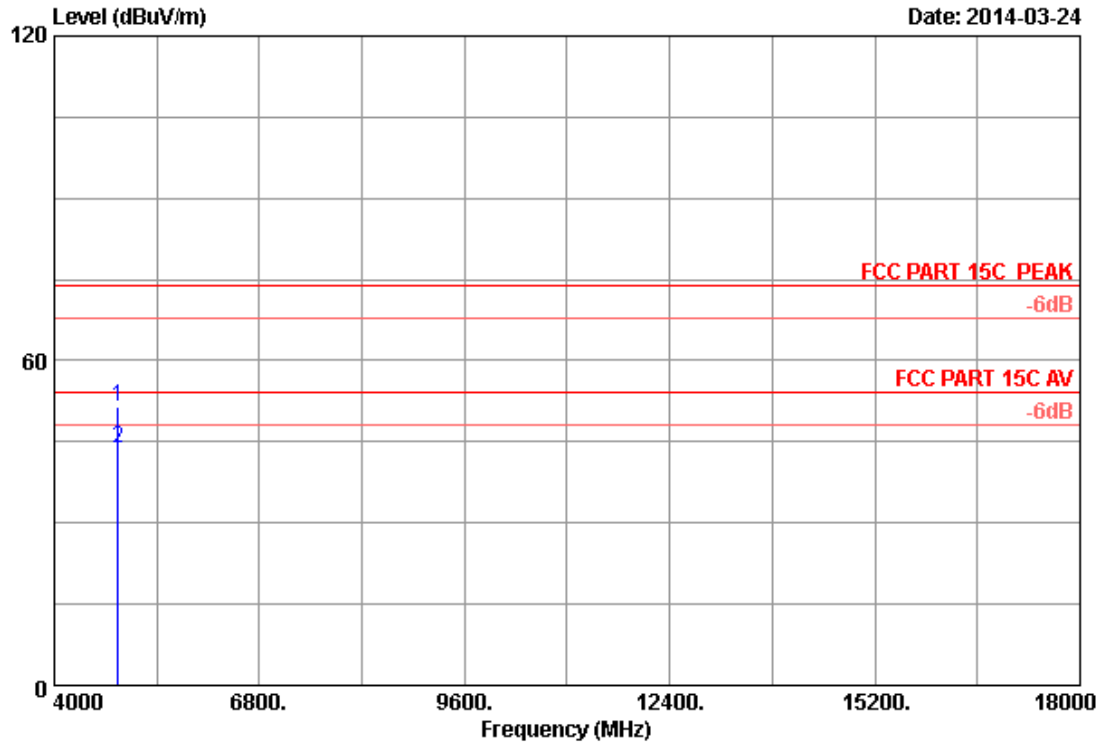

Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	45.65	51.55	74.00	22.45	Peak
2	4874.000	32.97	8.63	35.70	37.99	43.89	54.00	10.11	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 93

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)


Date: 2014-03-24

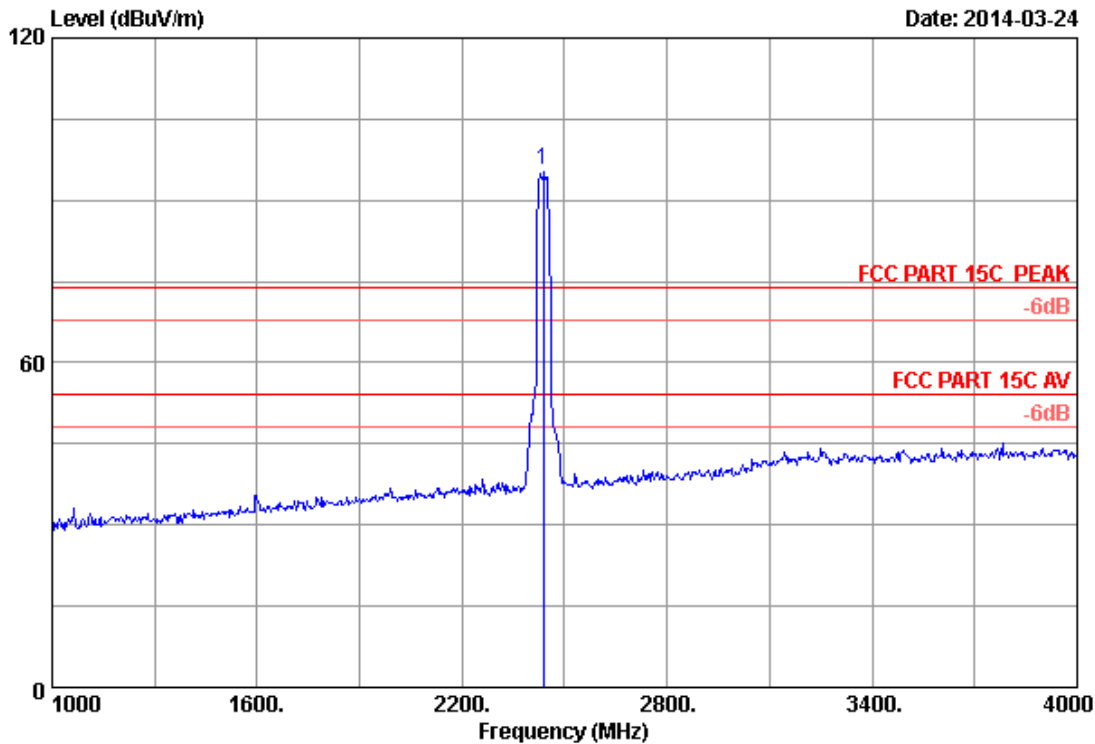

Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2437.000	28.26	5.85	35.70	97.14	95.55	74.00	-21.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

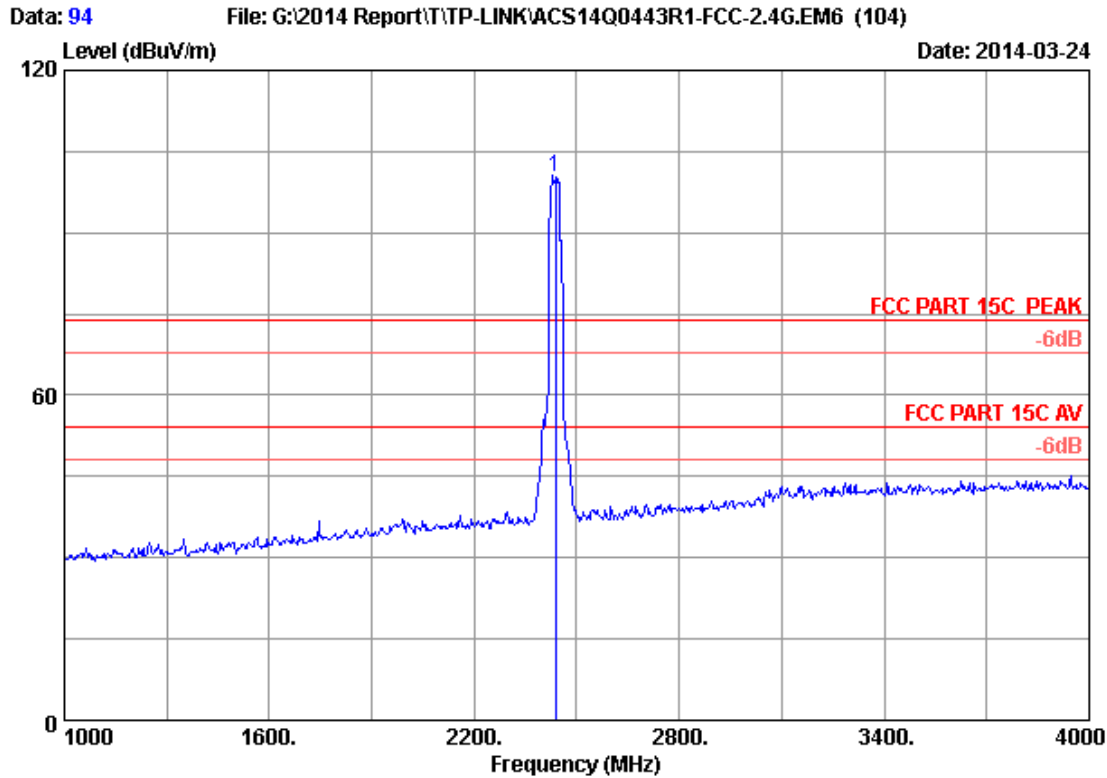

Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	35.70	101.91	100.32	74.00	-26.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

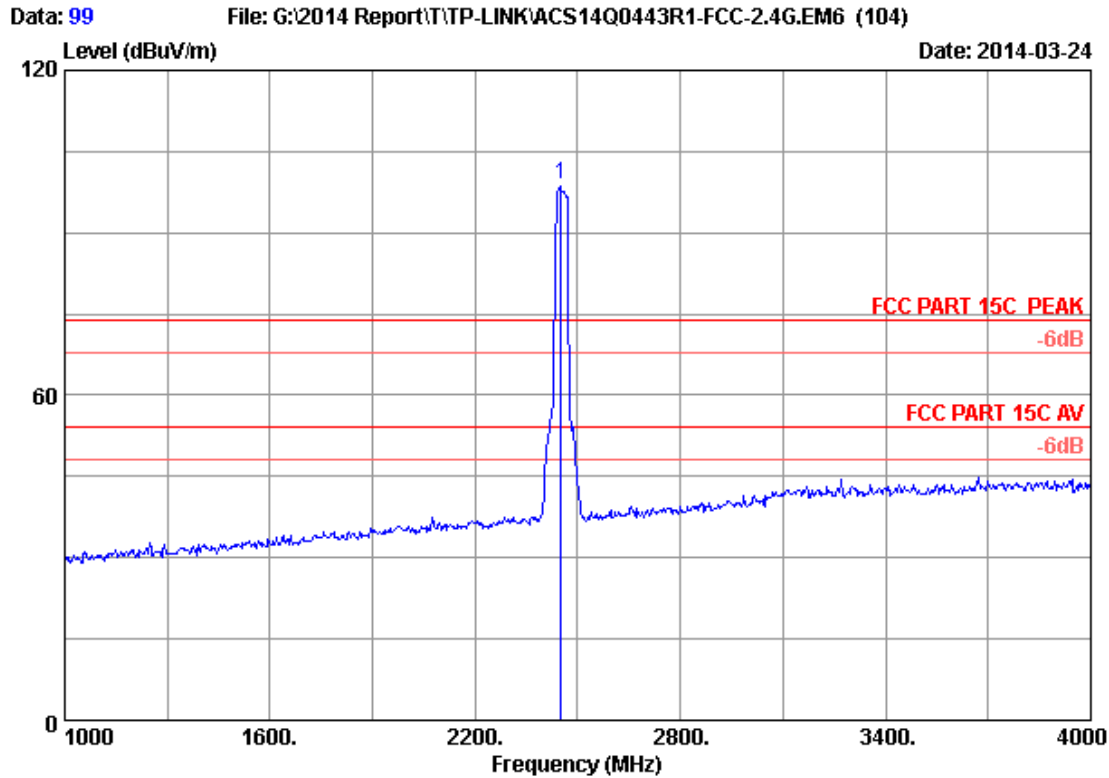

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.000	28.29	5.87	35.70	100.36	98.82	74.00	-24.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

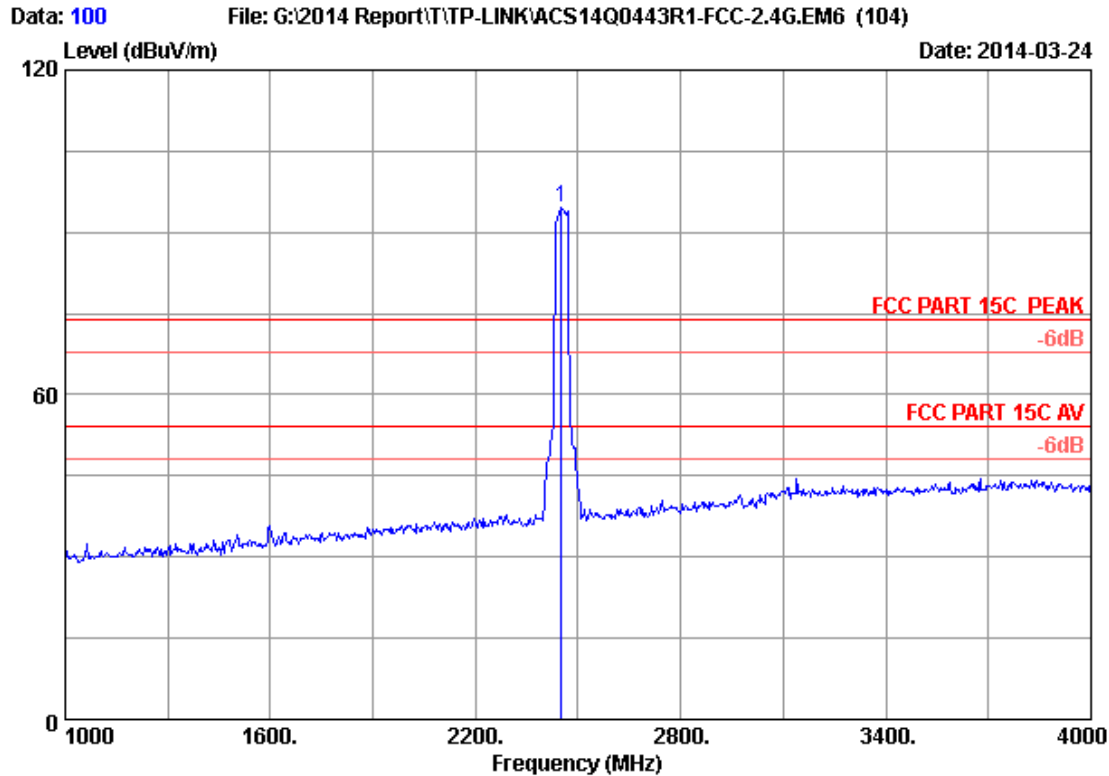

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.000	28.29	5.87	35.70	96.20	94.66	74.00	-20.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 101

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

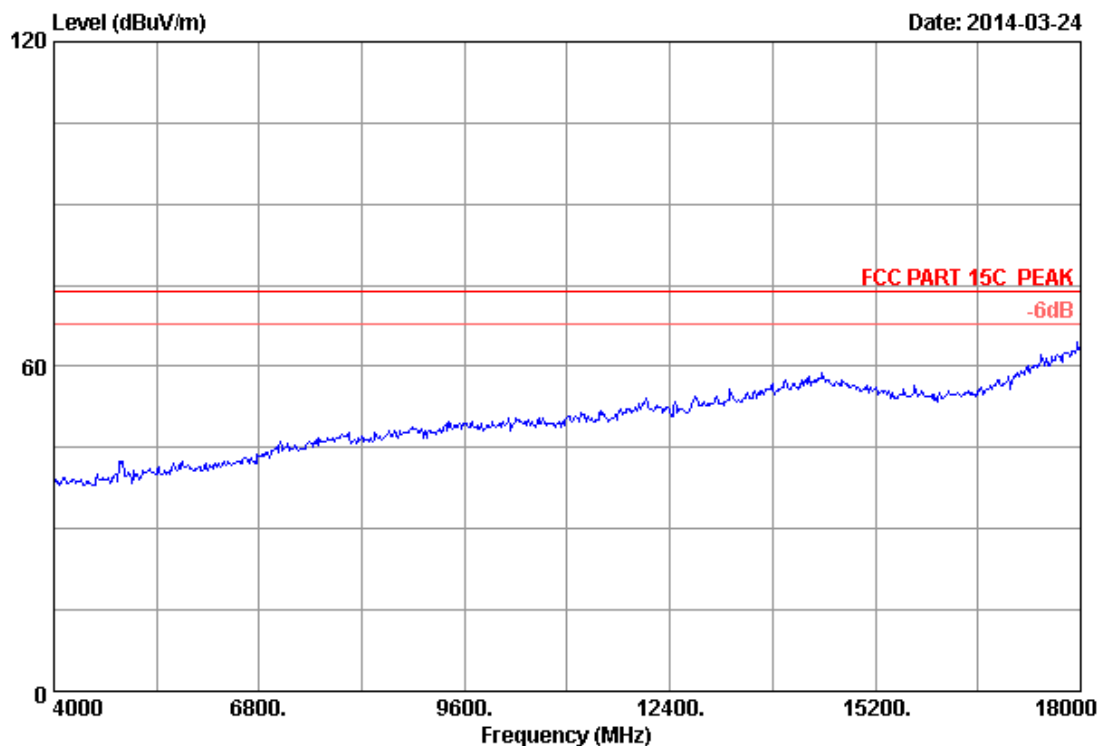


Site no.	: 3m Chamber	Data no.	: 101
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT40 2452MHz Tx		
M/N	: T2U		

Data: 102

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

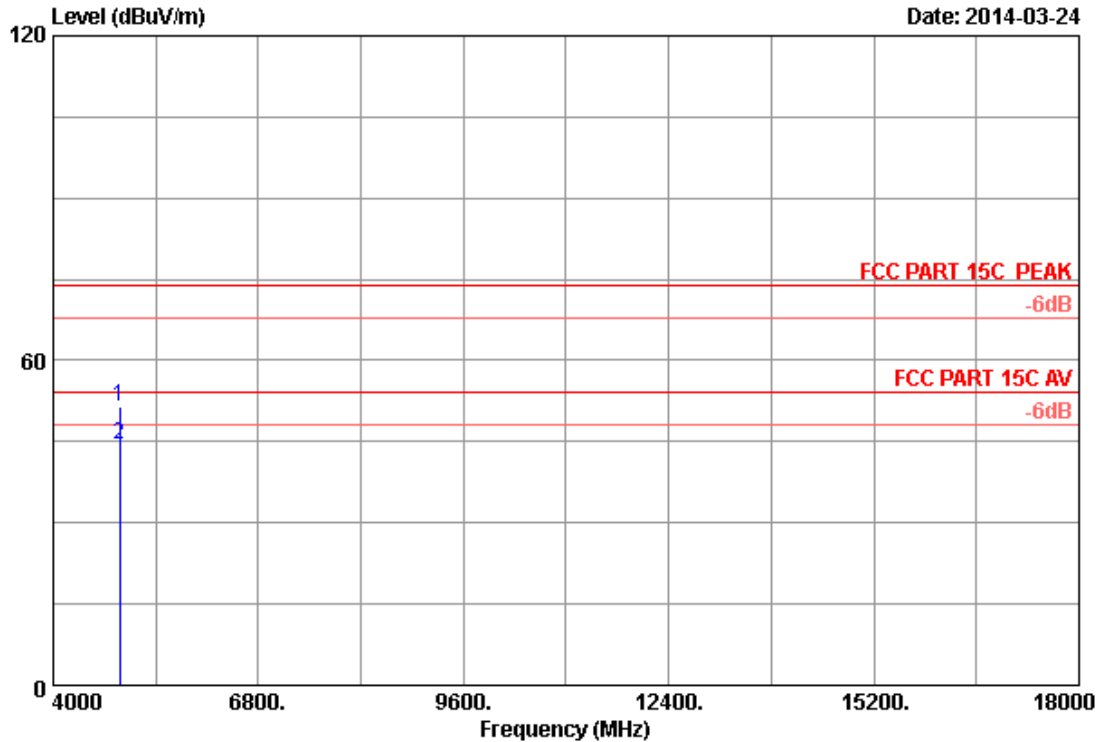

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.000	33.03	8.66	35.70	45.32	51.31	74.00	22.69	Peak
2	4904.000	33.03	8.66	35.70	38.33	44.32	54.00	9.68	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 103

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

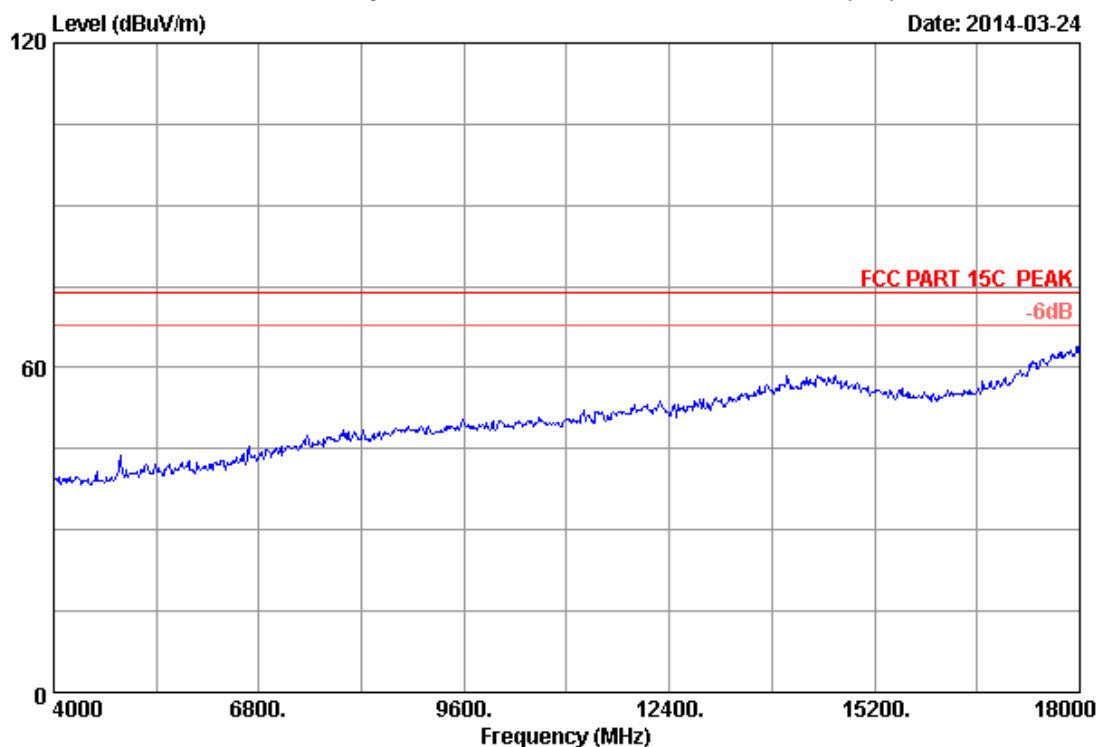


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : T2U

Data: 104

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-2.4G.EM6 (104)

Date: 2014-03-24

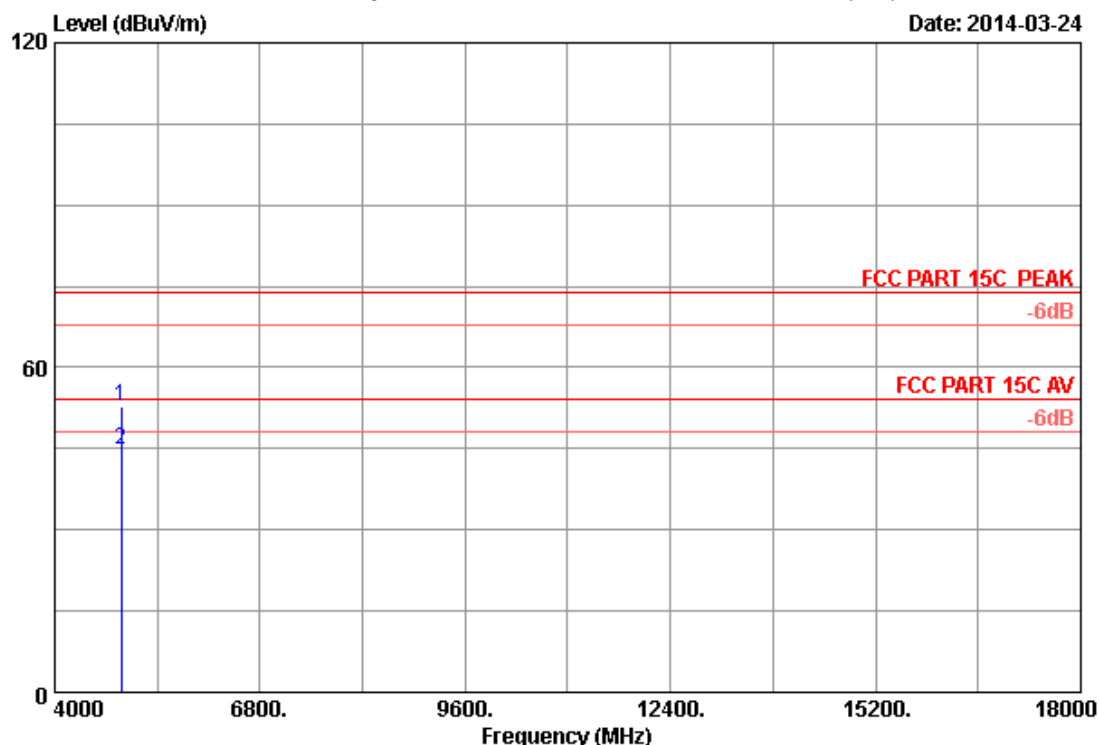


Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.000	33.03	8.66	35.70	46.88	52.87	74.00	21.13	Peak
2	4904.000	33.03	8.66	35.70	38.64	44.63	54.00	9.37	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Band 4: 5725MHz-5850MHz
Frequency: 1GHz~18GHz

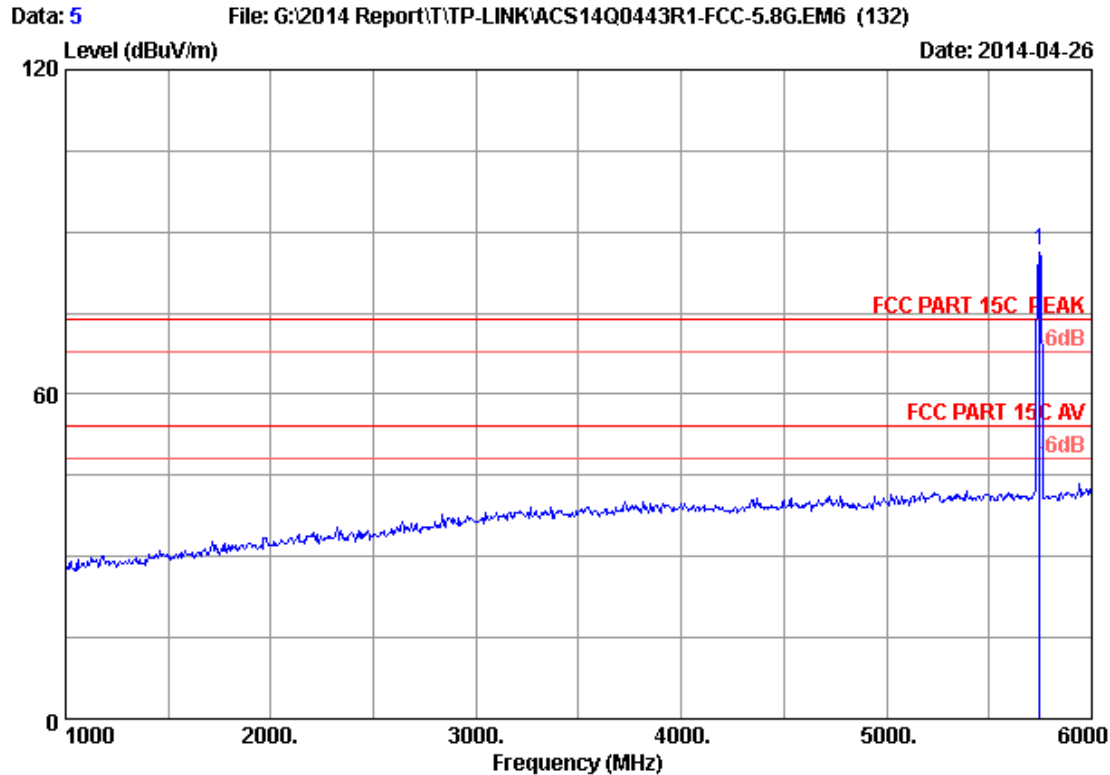

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	34.10	9.55	35.70	78.73	86.68	74.00	-12.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

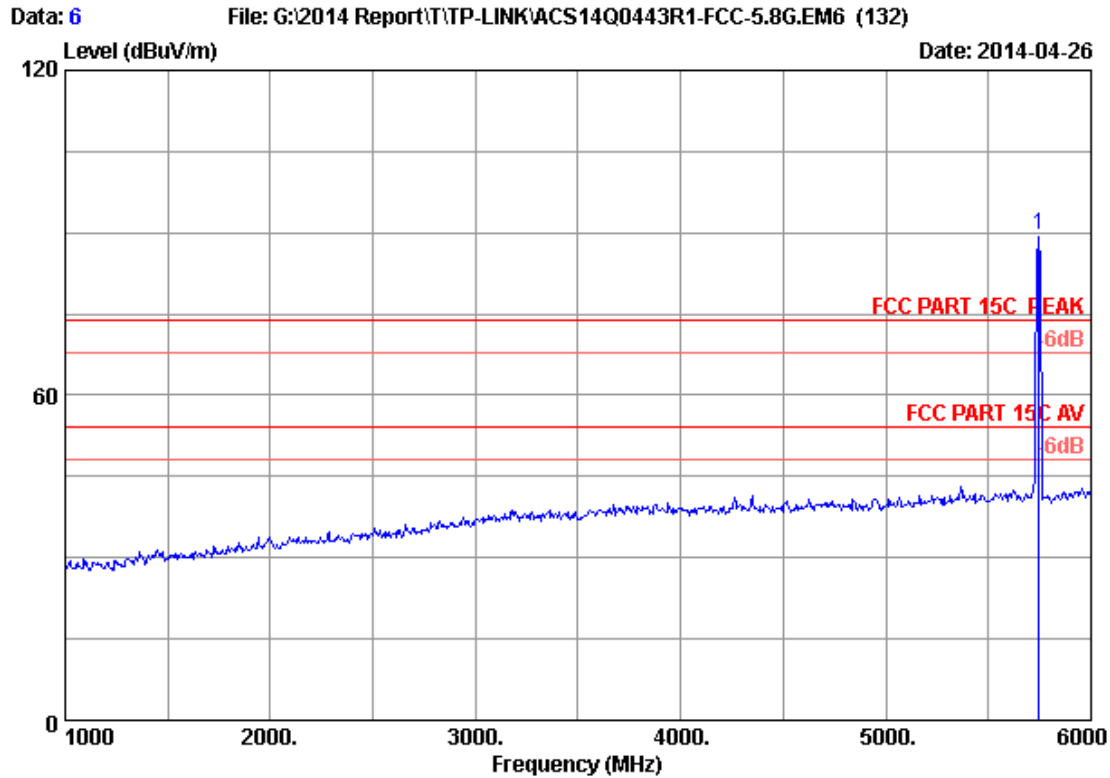

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission			
						Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	5745.000	34.10	9.55	35.70	81.66	89.61	74.00	-15.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 7

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

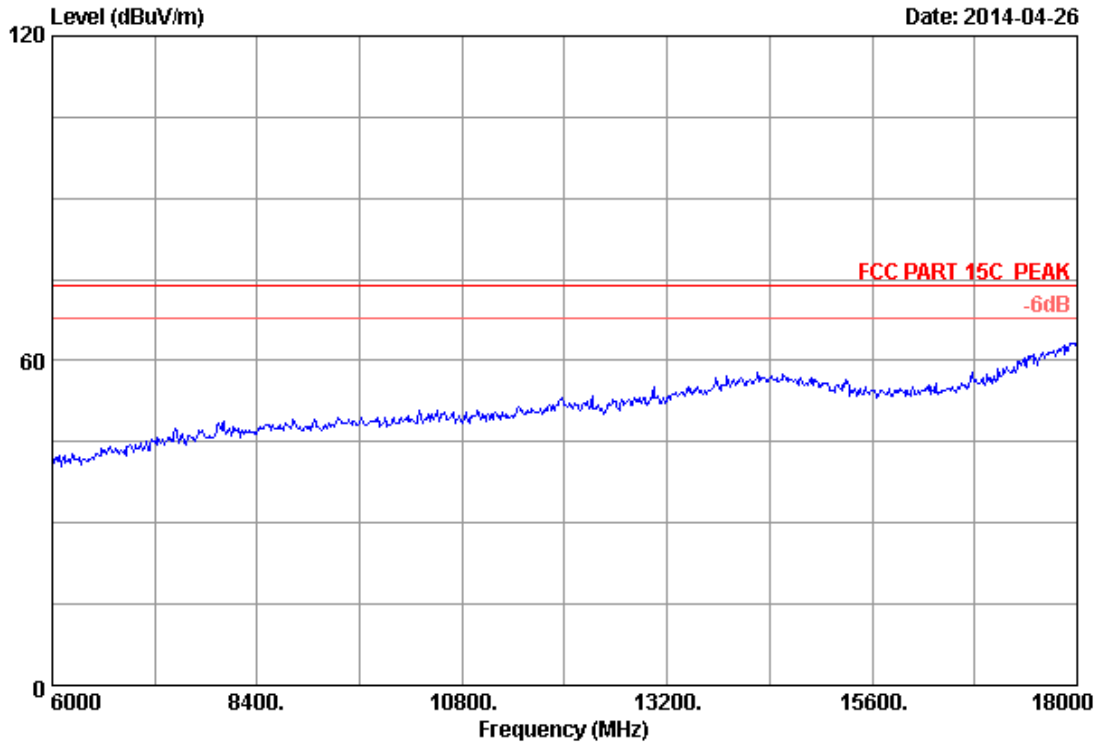

Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11a CH149 5745MHz Tx		
M/N	: T2U		

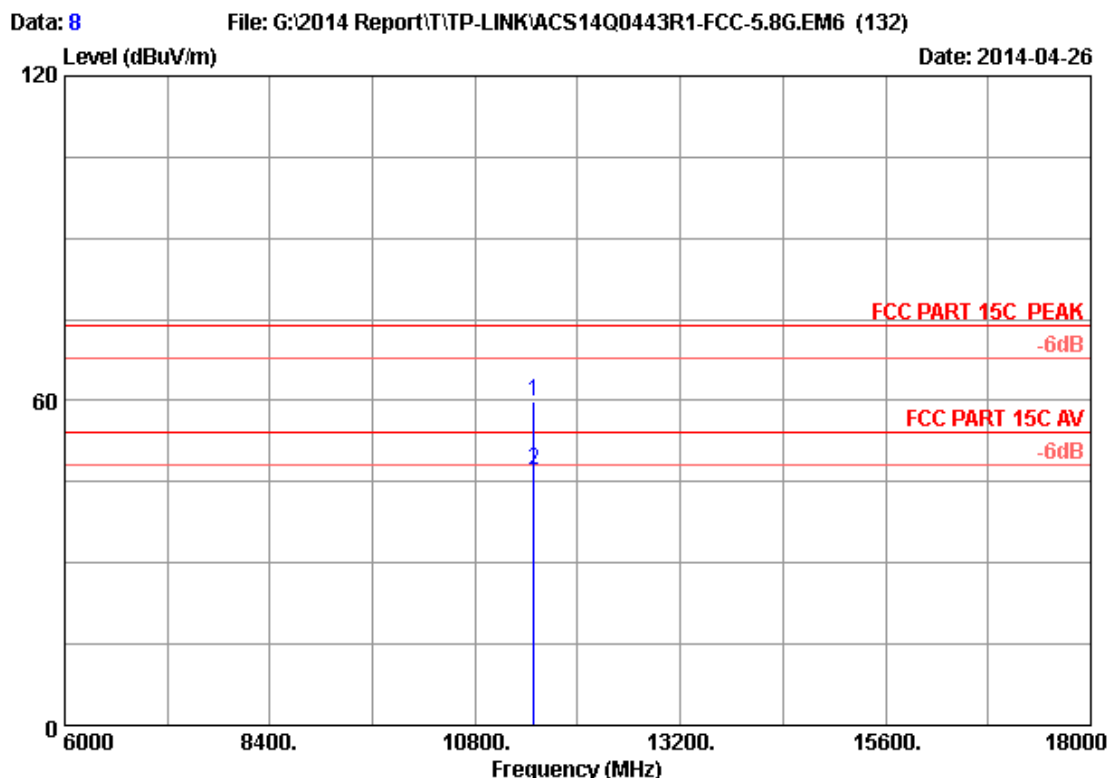

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.69	13.28	35.28	43.25	59.94	74.00	14.06	Peak
2	11490.000	38.69	13.28	35.28	30.38	47.07	54.00	6.93	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 9

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

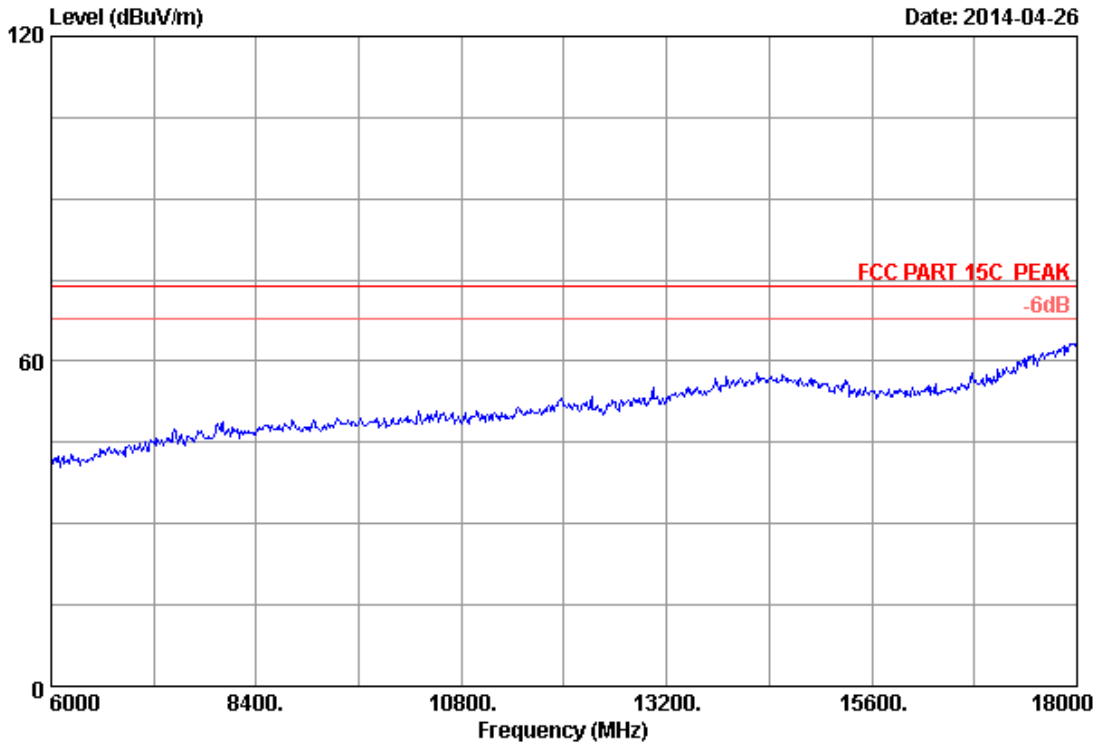


Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11a CH149 5745MHz Tx		
M/N	: T2U		

Data: 10

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

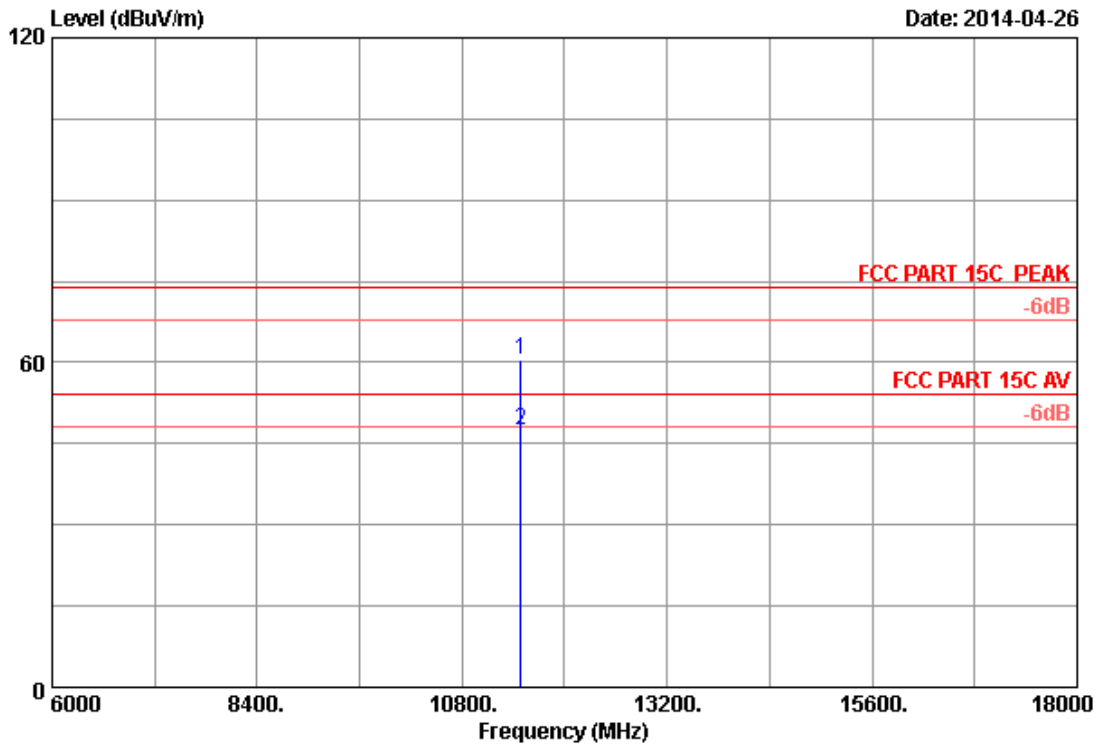

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.69	13.28	35.28	43.65	60.34	74.00	13.66	Peak
2	11490.000	38.69	13.28	35.28	30.79	47.48	54.00	6.52	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 11

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

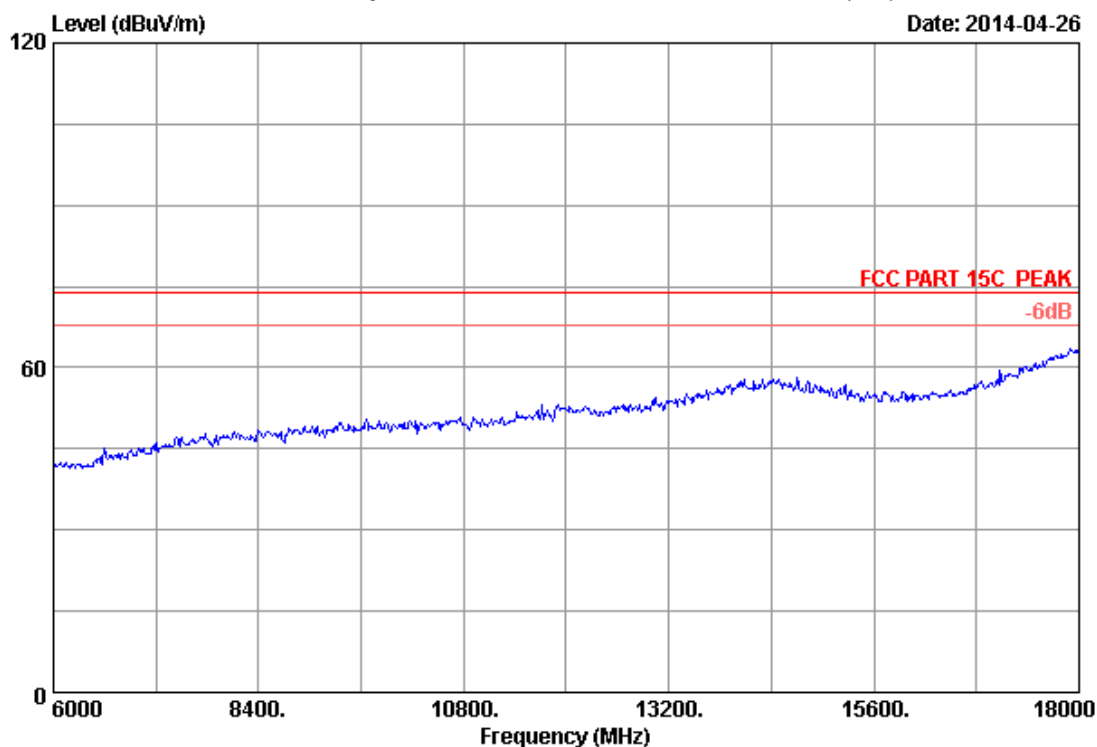

Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11a CH157 5785MHz Tx		
M/N	: T2U		

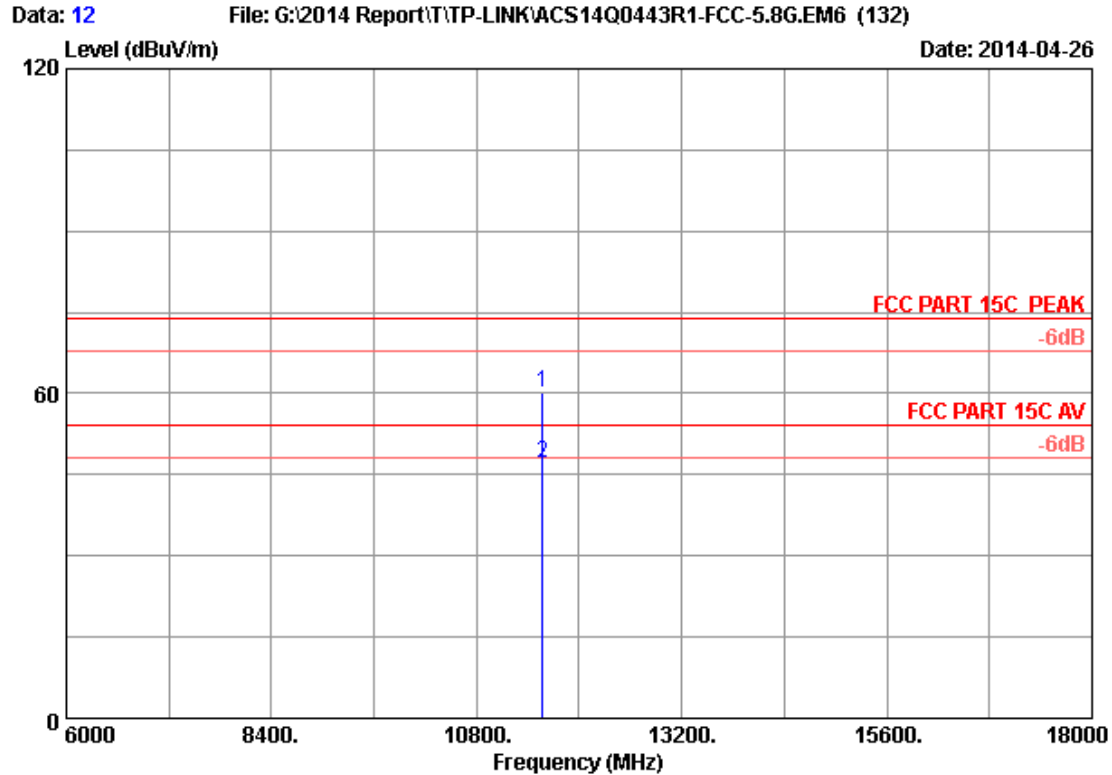

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.80	13.32	35.26	43.29	60.15	74.00	13.85	Peak
2	11570.000	38.80	13.32	35.26	30.35	47.21	54.00	6.79	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 13

File: G:\2014 Report\IT\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

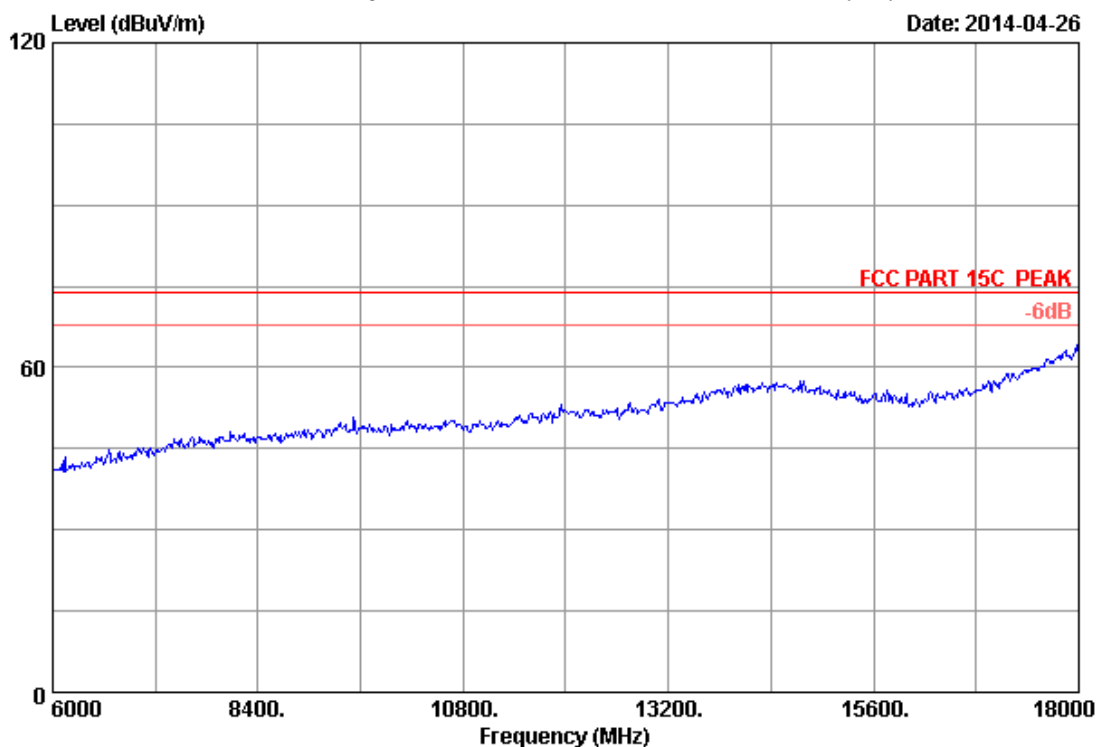

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 M/N : T2U

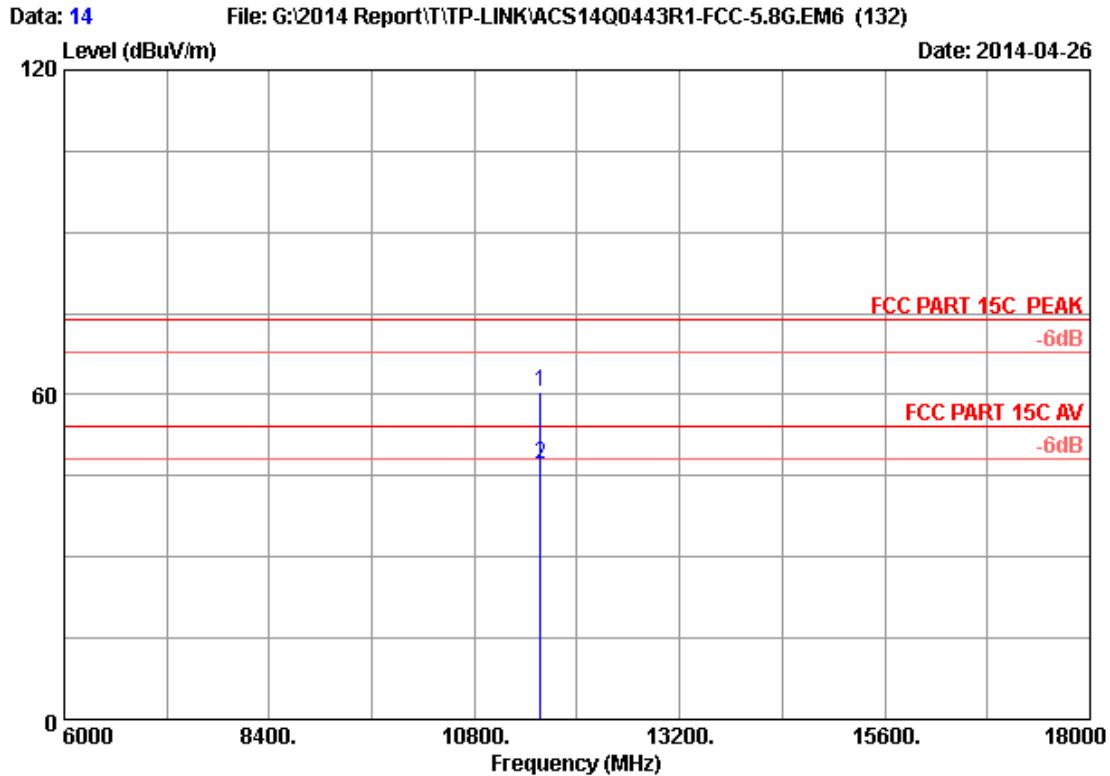

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.80	13.32	35.26	43.58	60.44	74.00	13.56	Peak
2	11570.000	38.80	13.32	35.26	30.14	47.00	54.00	7.00	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 15

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)


Date: 2014-04-26

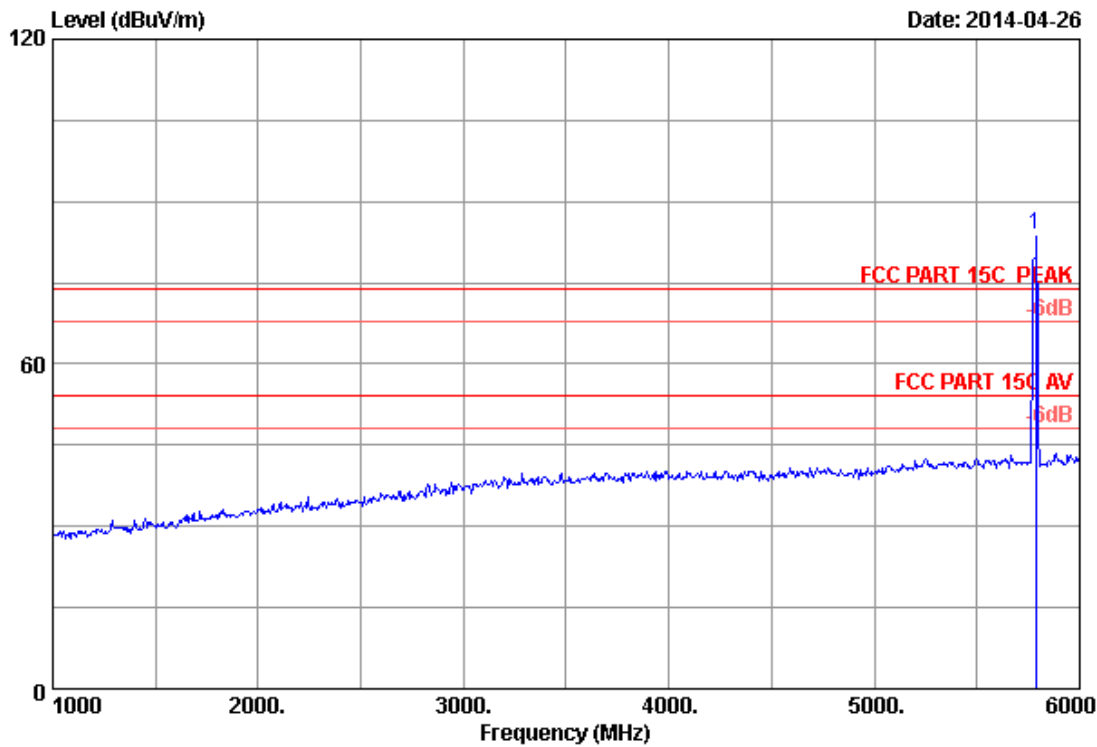

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	34.11	9.59	35.70	75.80	83.80	74.00	-9.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

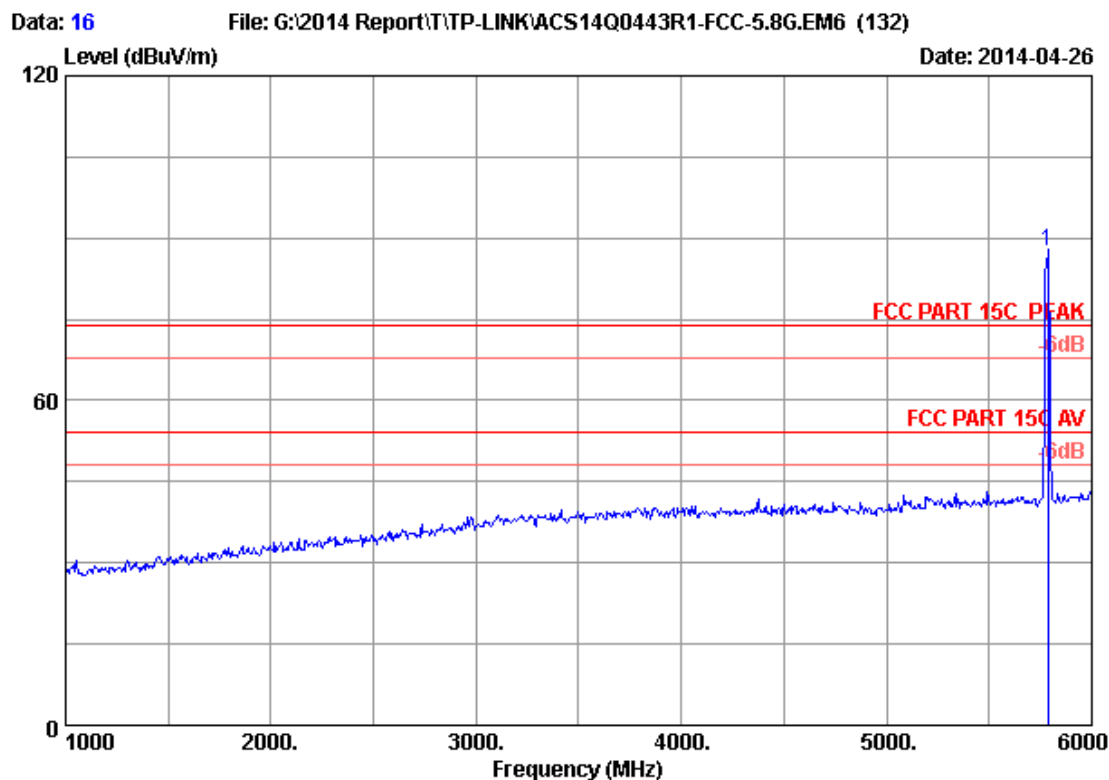

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH157 5785MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	34.11	9.59	35.70	79.48	87.48	74.00	-13.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

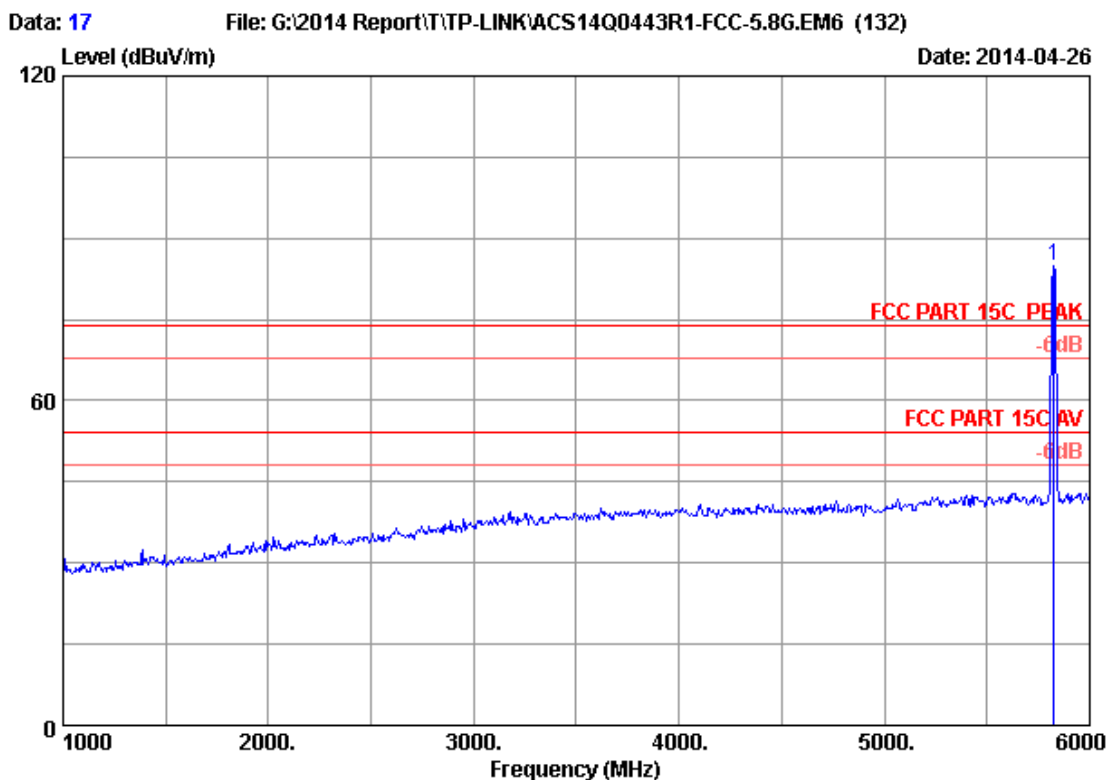

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	34.13	9.63	35.70	76.84	84.90	74.00	-10.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

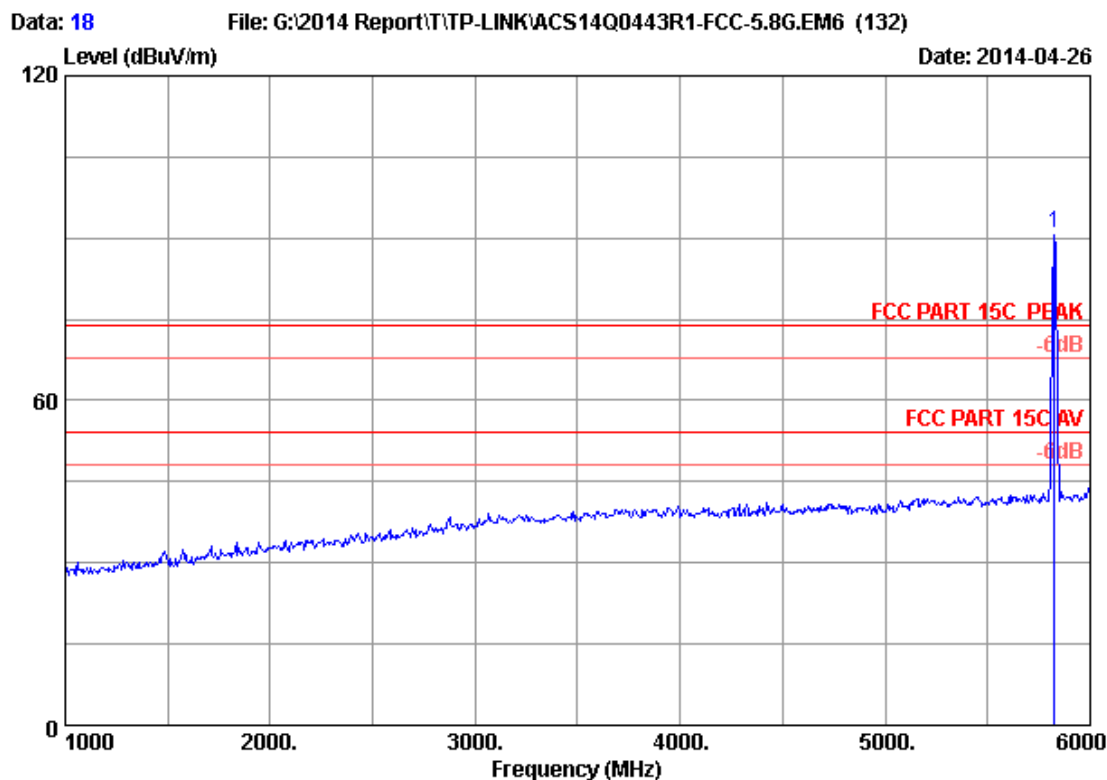

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	34.13	9.63	35.70	82.71	90.77	74.00	-16.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 23

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Level (dBuV/m)

Date: 2014-04-26

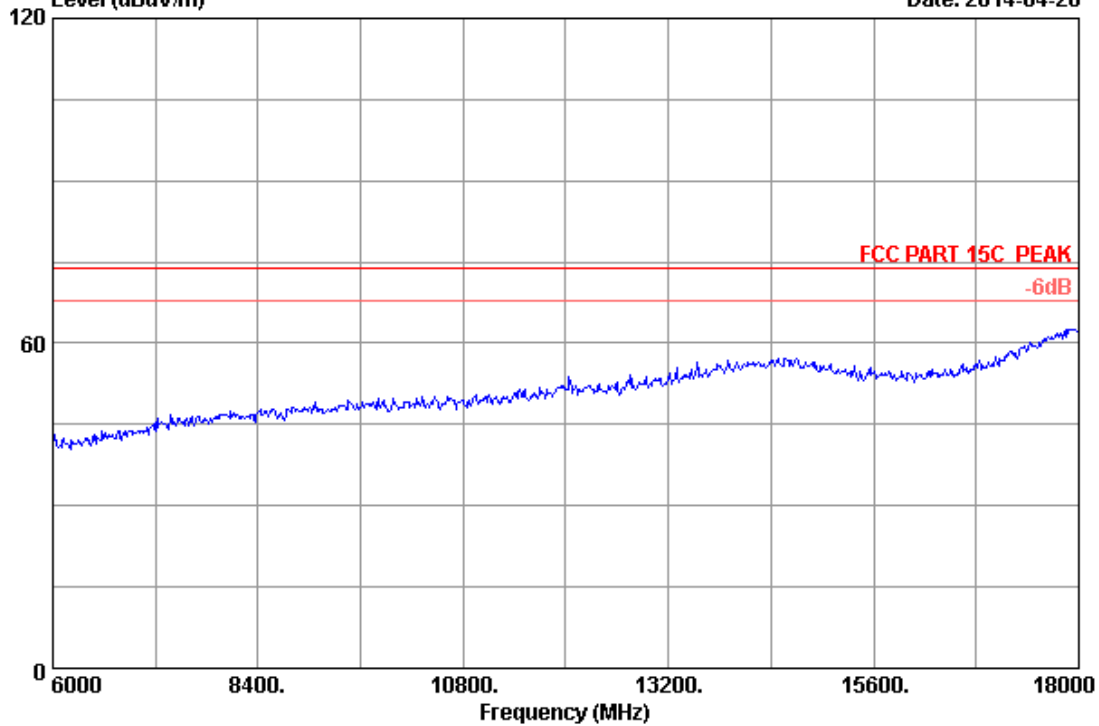


Site no.	: 3m Chamber	Data no.	: 23
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11a CH165 5825MHz Tx		
M/N	: T2U		

Data: 24

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)


Date: 2014-04-26

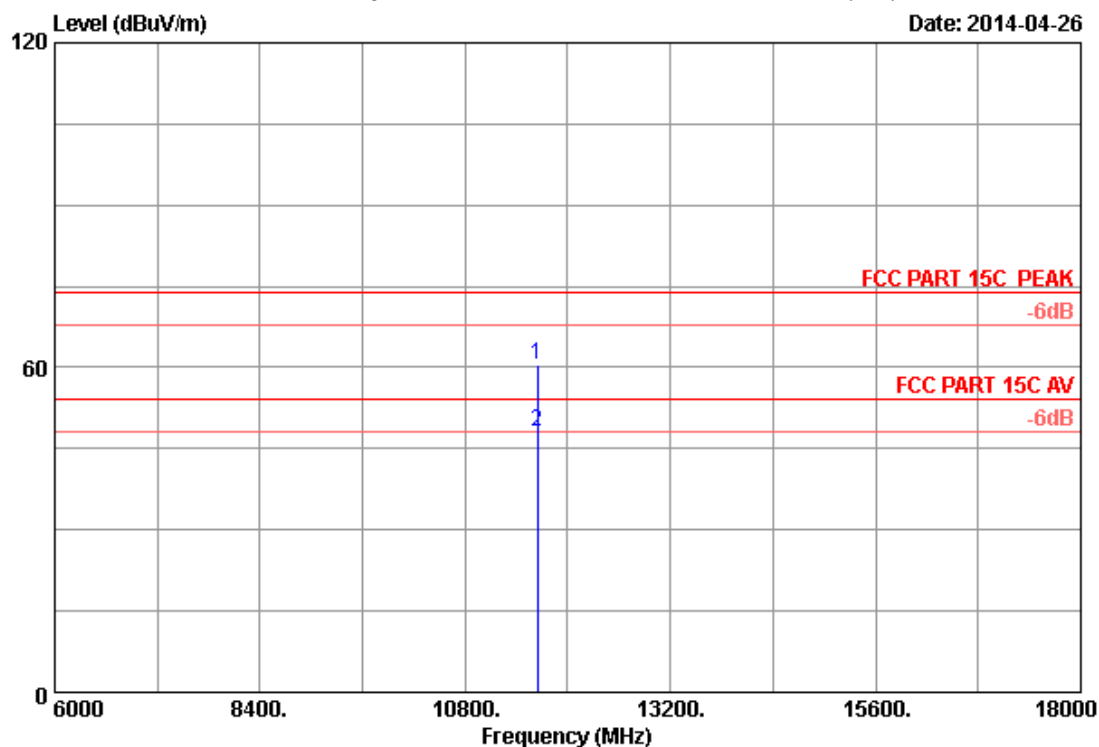

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.91	13.37	35.25	43.58	60.61	74.00	13.39	Peak
2	11650.000	38.91	13.37	35.25	30.94	47.97	54.00	6.03	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

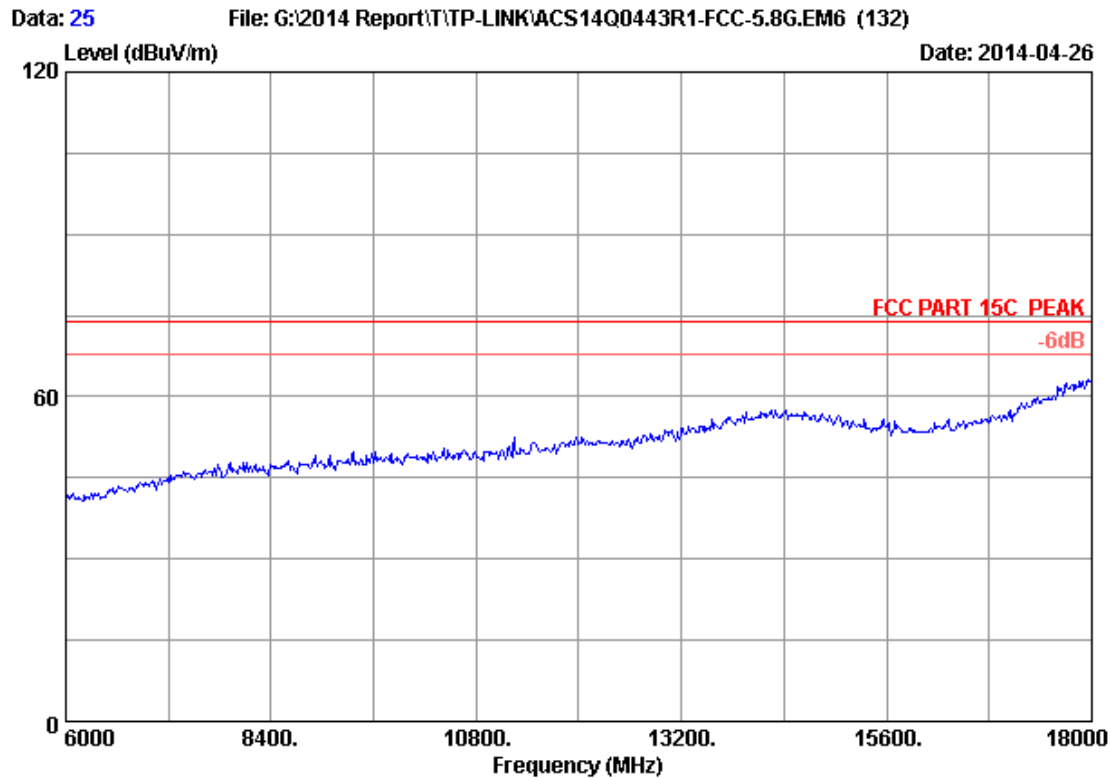


Site no.	: 3m Chamber	Data no.	: 25
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11a CH165 5825MHz Tx		
M/N	: T2U		

Data: 26

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

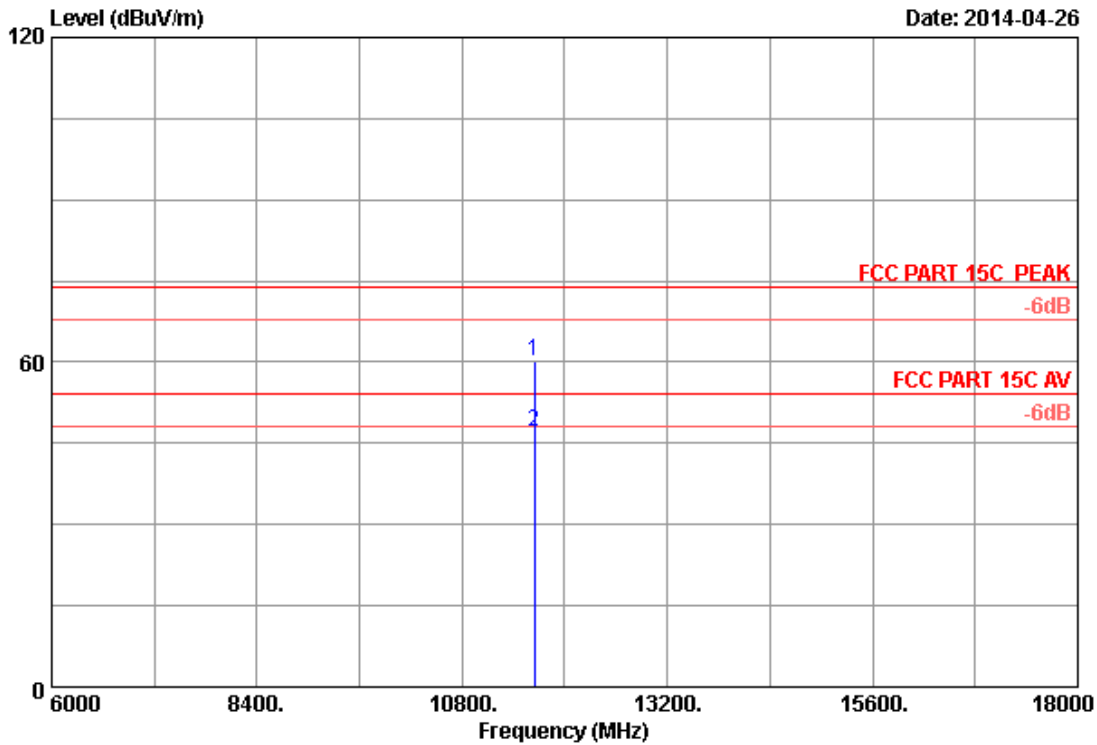

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11a CH165 5825MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.91	13.37	35.25	43.17	60.20	74.00	13.80	Peak
2	11650.000	38.91	13.37	35.25	30.08	47.11	54.00	6.89	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 27

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

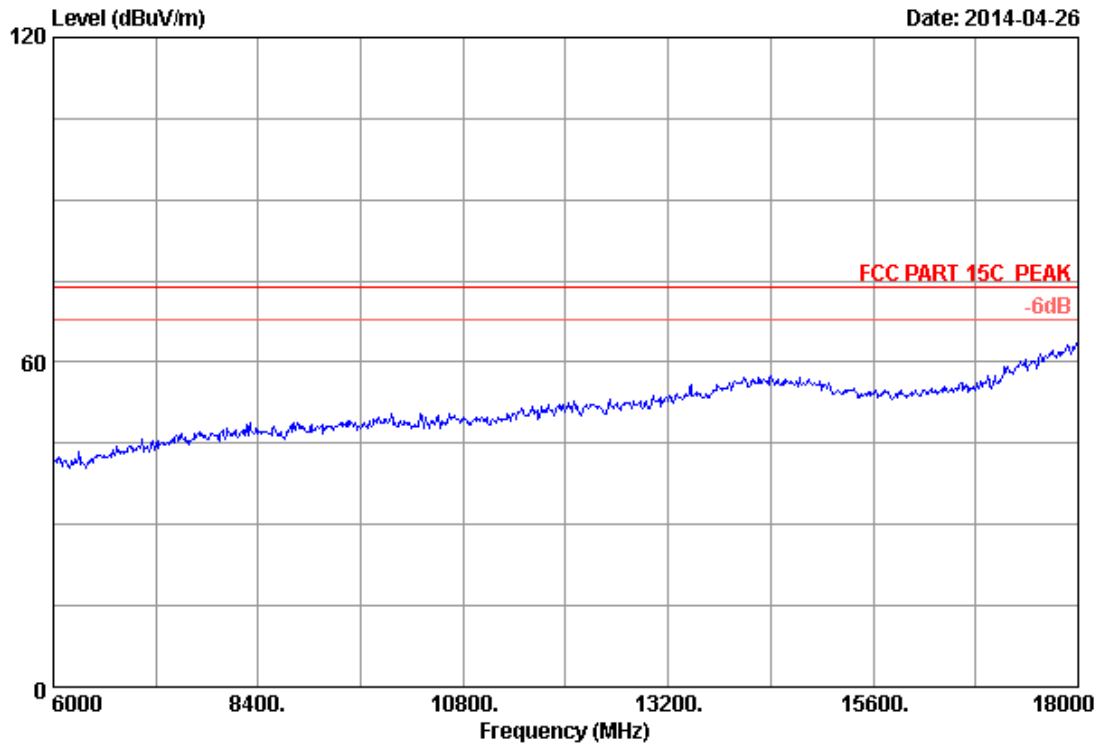

Site no.	: 3m Chamber	Data no.	: 27
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 CH165 5825MHz Tx		
M/N	: T2U		

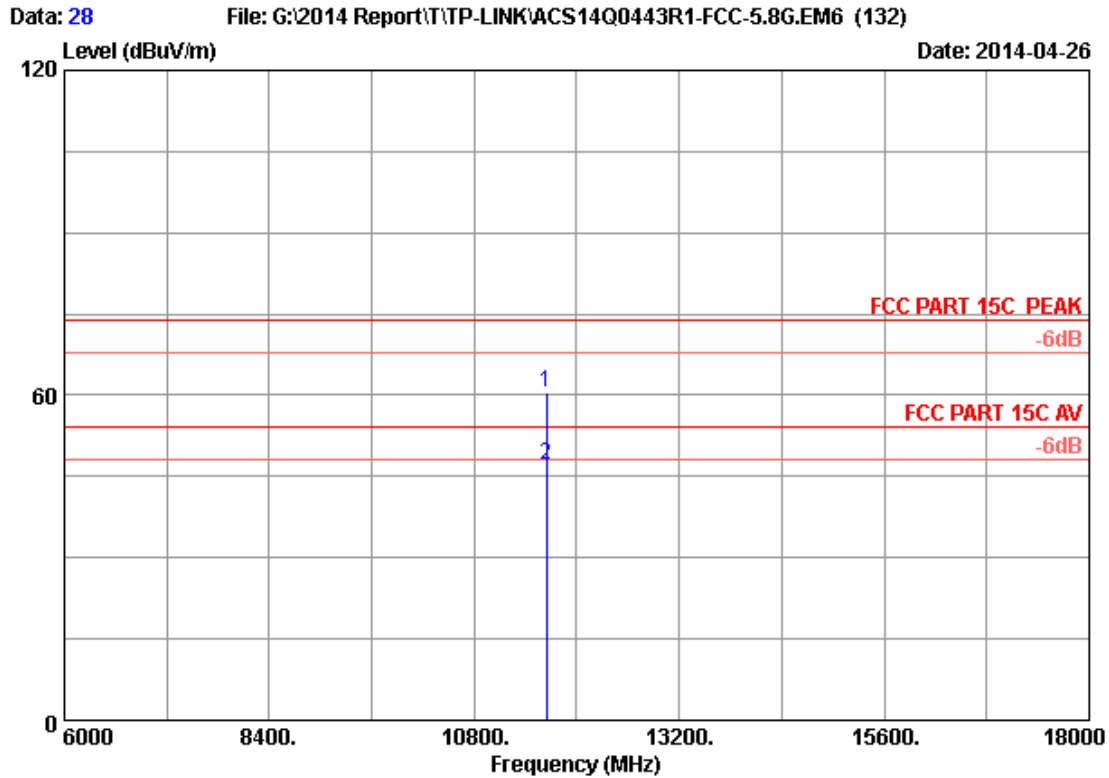

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.91	13.37	35.25	43.58	60.61	74.00	13.39	Peak
2	11650.000	38.91	13.37	35.25	30.21	47.24	54.00	6.76	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 29

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

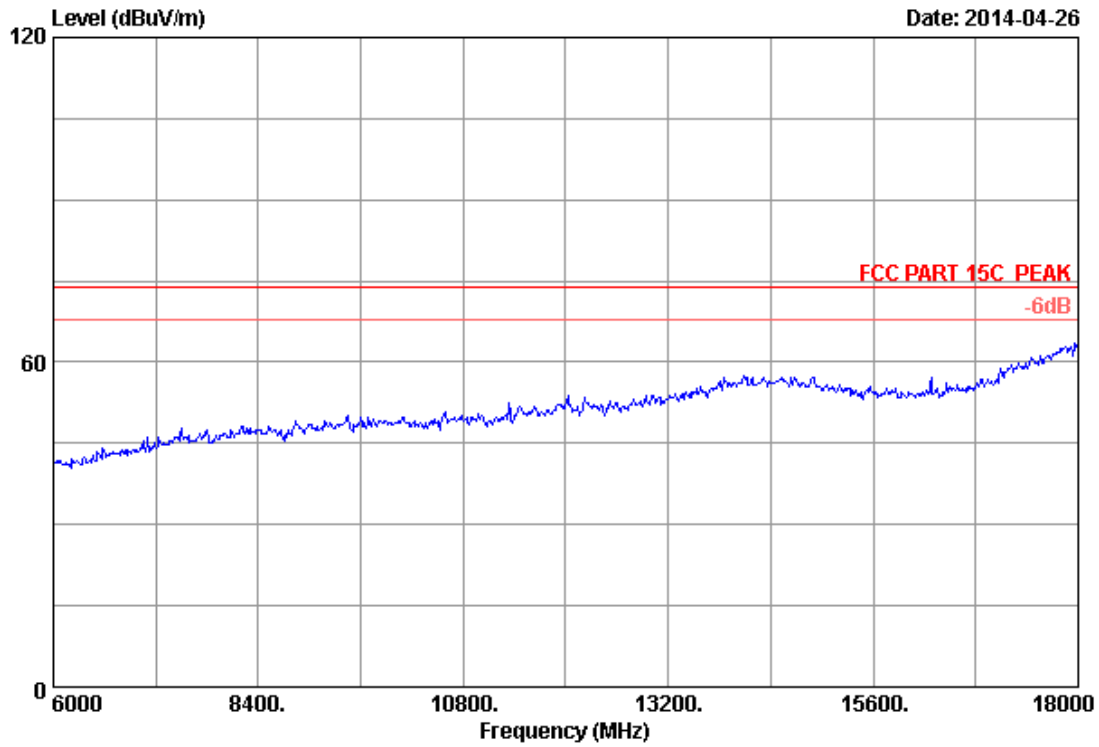


Site no.	: 3m Chamber	Data no.	: 29
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 CH165 5825MHz Tx		
M/N	: T2U		

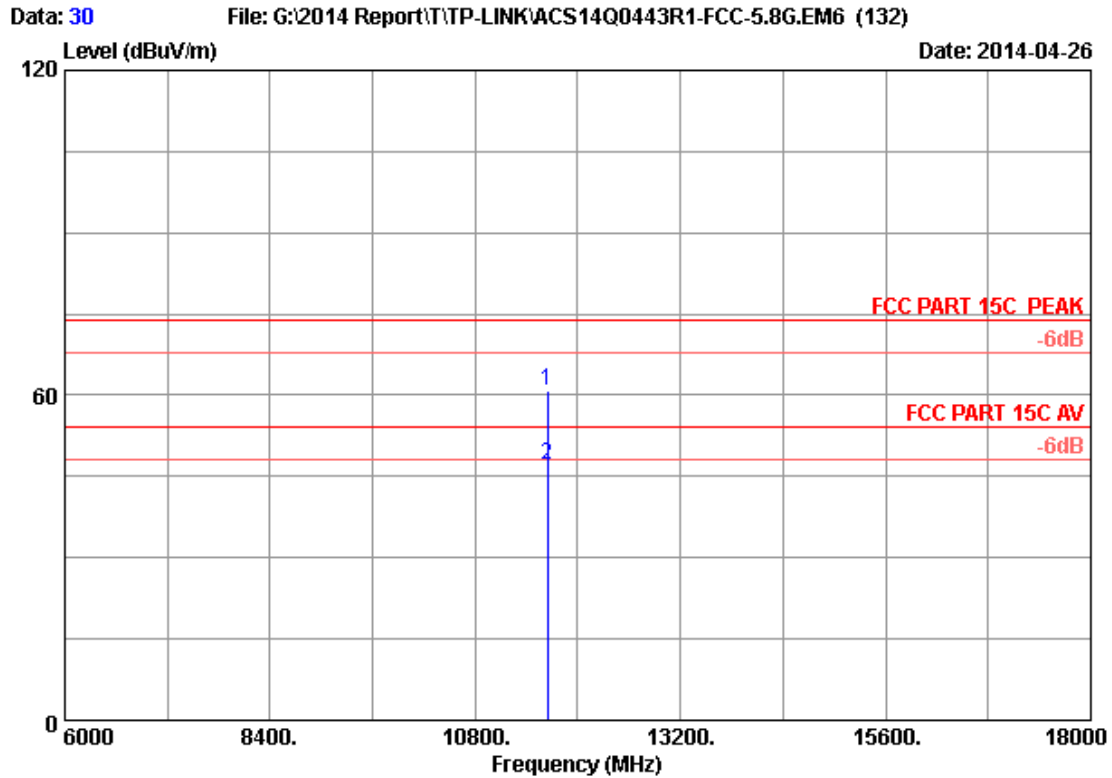

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.91	13.37	35.25	43.75	60.78	74.00	13.22	Peak
2	11650.000	38.91	13.37	35.25	30.27	47.30	54.00	6.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

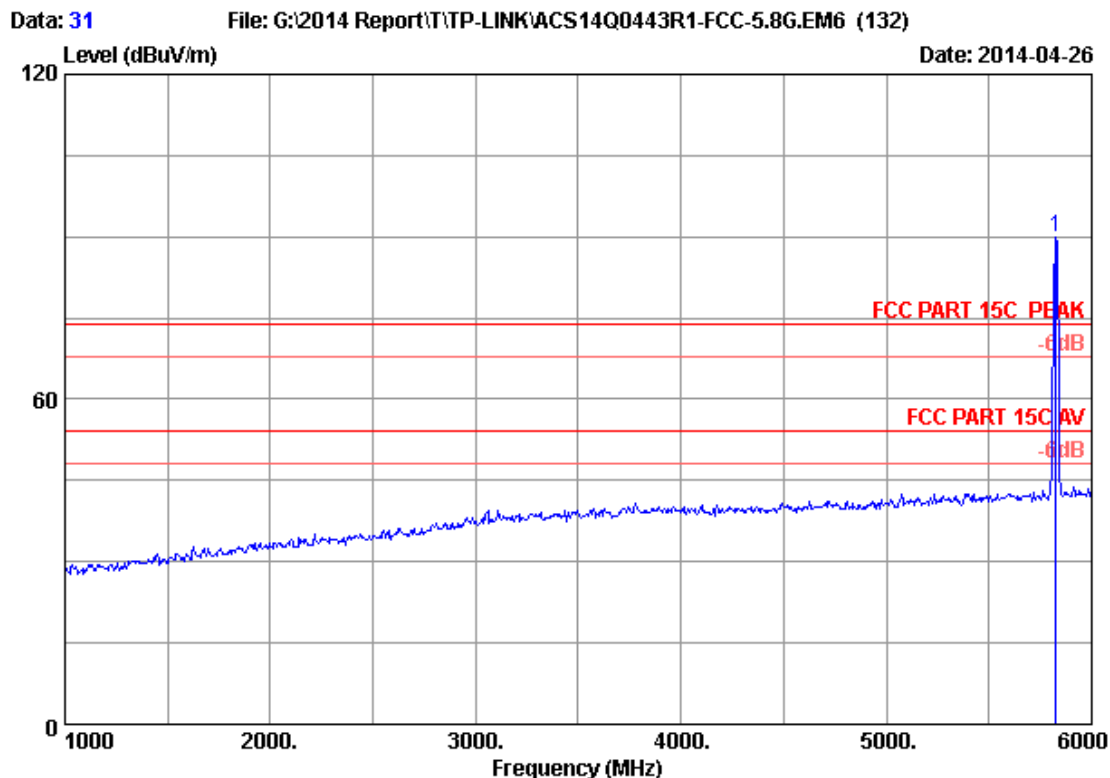

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	34.13	9.63	35.70	81.74	89.80	74.00	-15.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

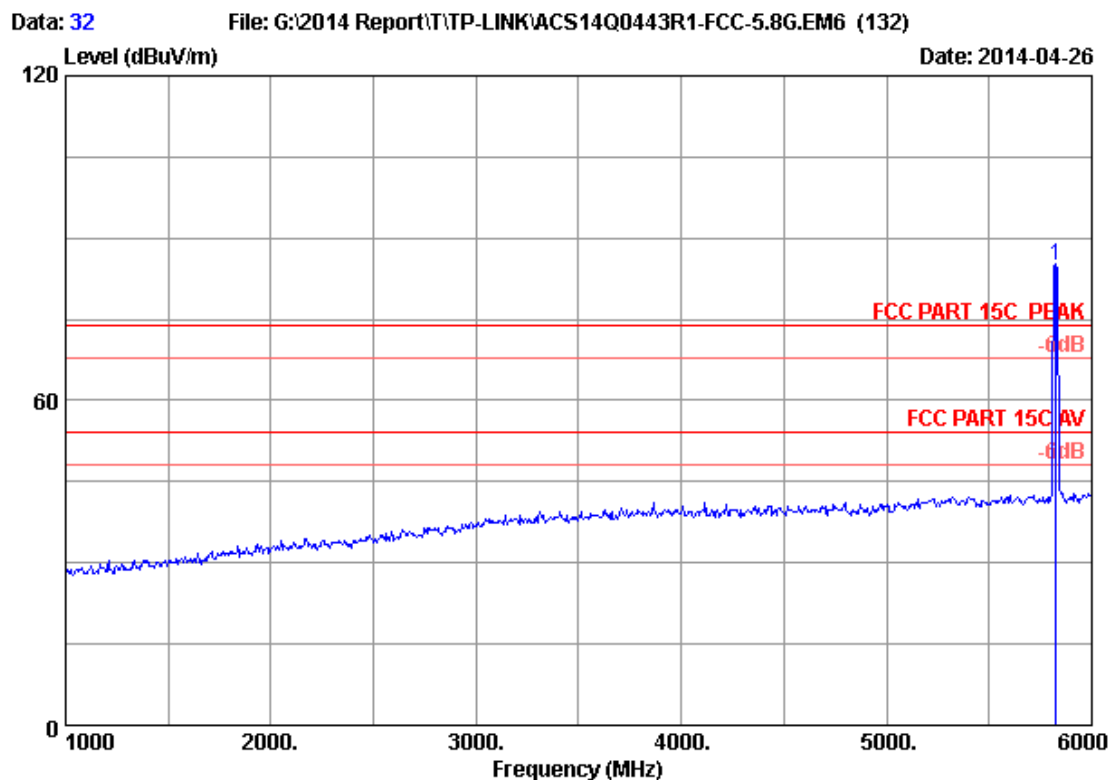

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	34.13	9.63	35.70	76.99	85.05	74.00	-11.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

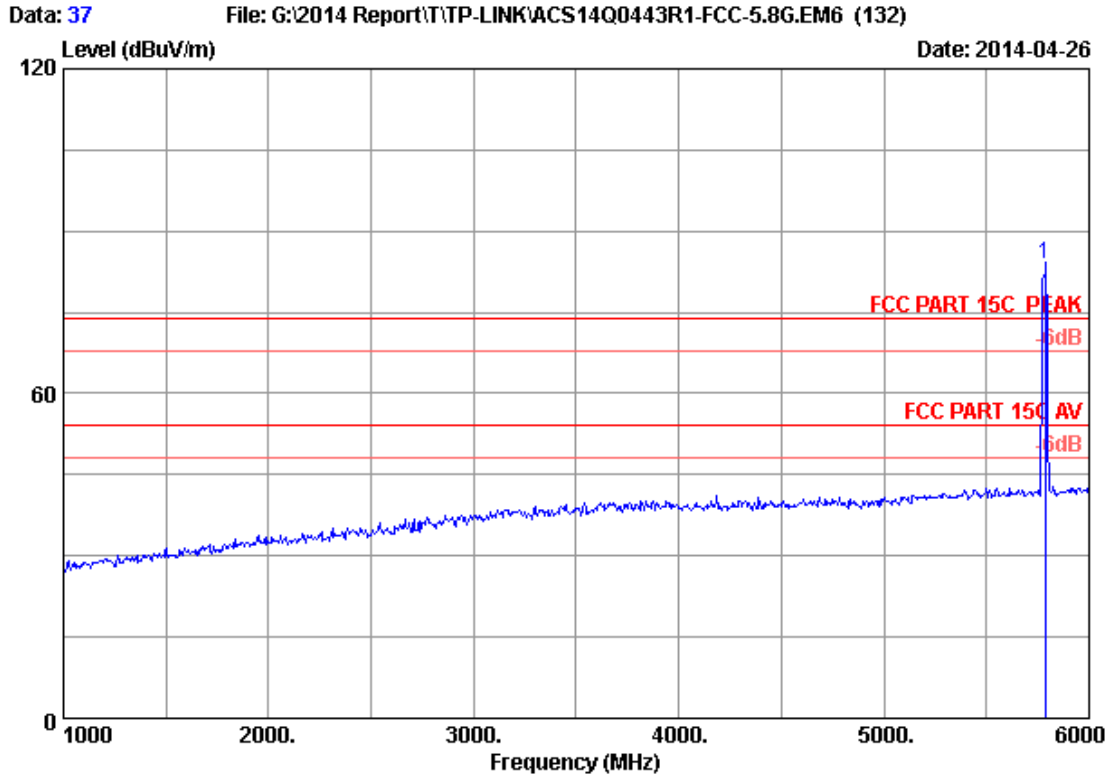

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Cable AMP			Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	34.11	9.59	35.70	76.05	84.05	74.00	-10.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 38

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

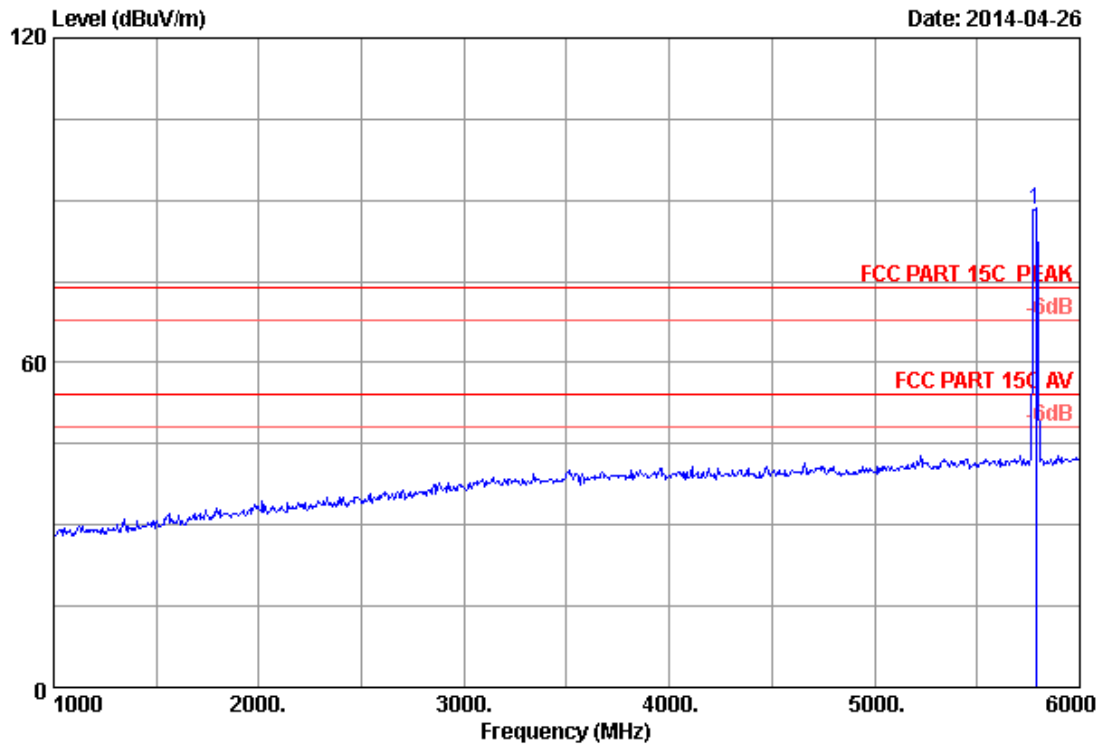

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	34.11	9.59	35.70	80.17	88.17	74.00	-14.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 39

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

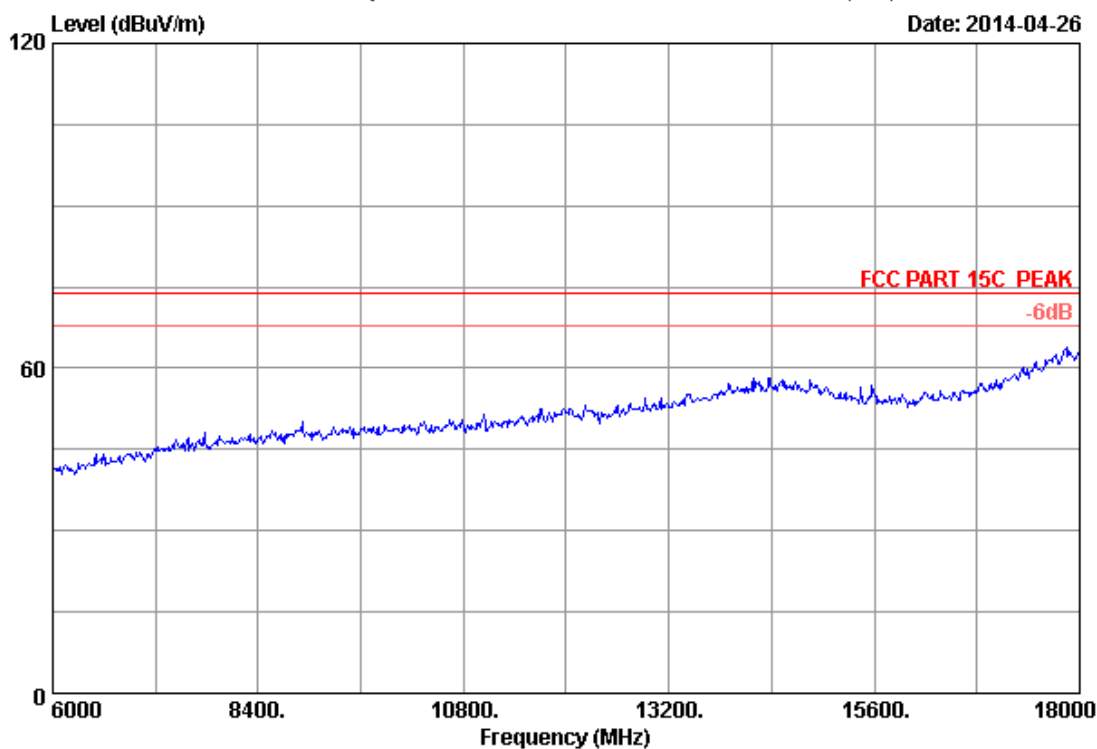


Site no.	: 3m Chamber	Data no.	: 39
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 CH157 5785MHz Tx		
M/N	: T2U		

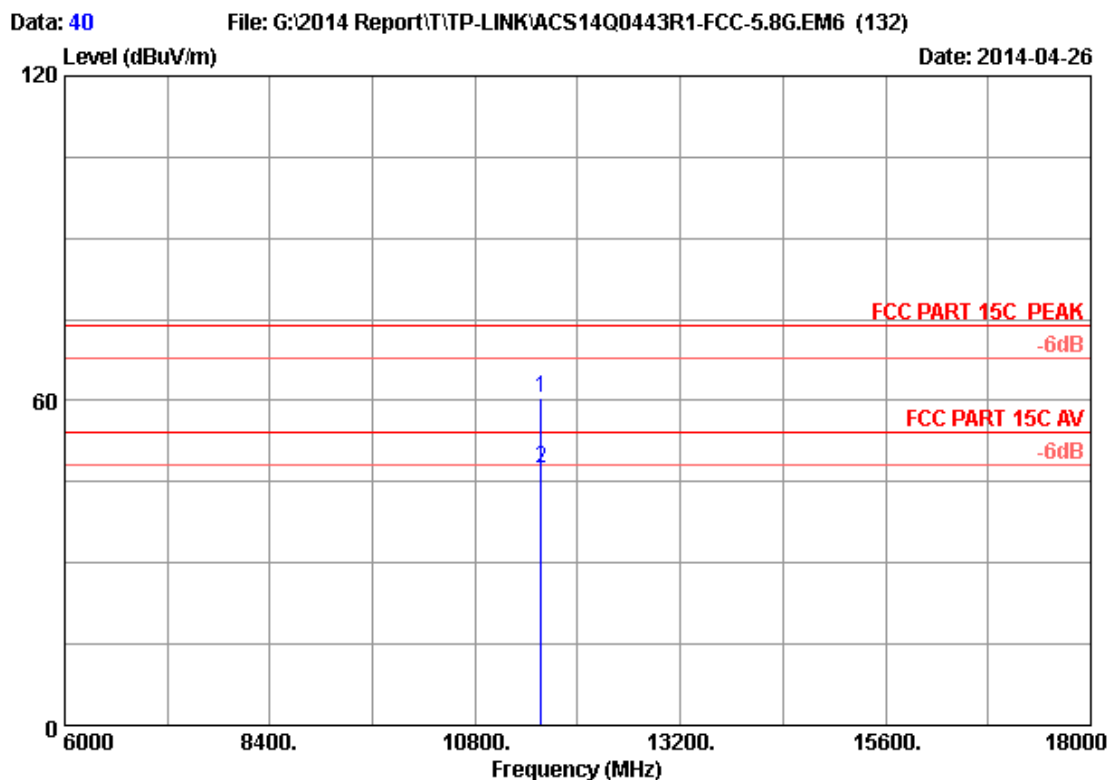


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.80	13.32	35.26	43.63	60.49	74.00	13.51	Peak
2	11570.000	38.80	13.32	35.26	30.47	47.33	54.00	6.67	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

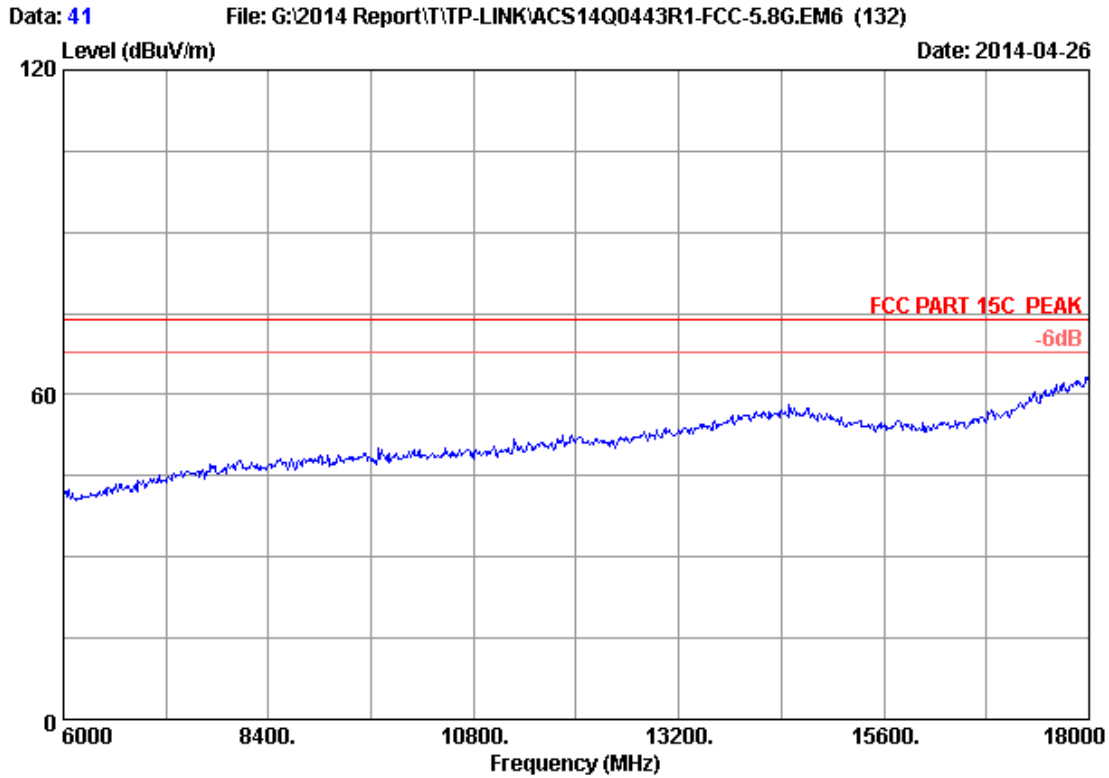

Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 CH157 5785MHz Tx		
M/N	: T2U		

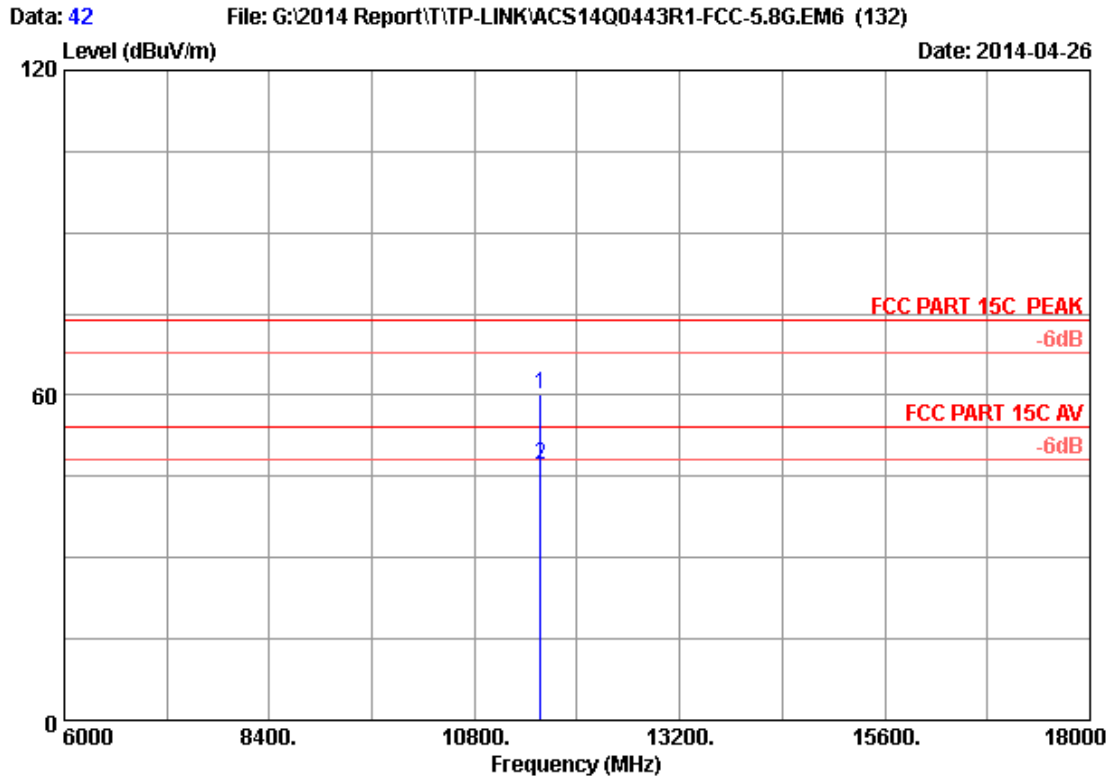

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.80	13.32	35.26	43.22	60.08	74.00	13.92	Peak
2	11570.000	38.80	13.32	35.26	30.16	47.02	54.00	6.98	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 43

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

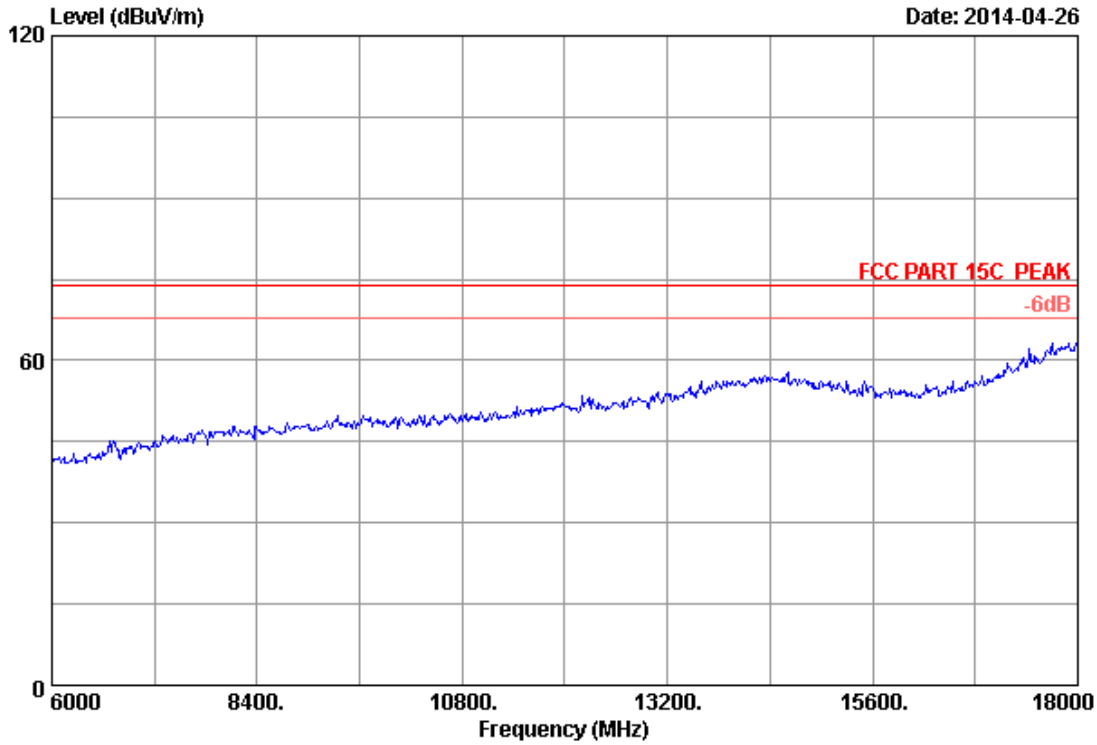


Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 CH149 5745MHz Tx		
M/N	: T2U		

Data: 44

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

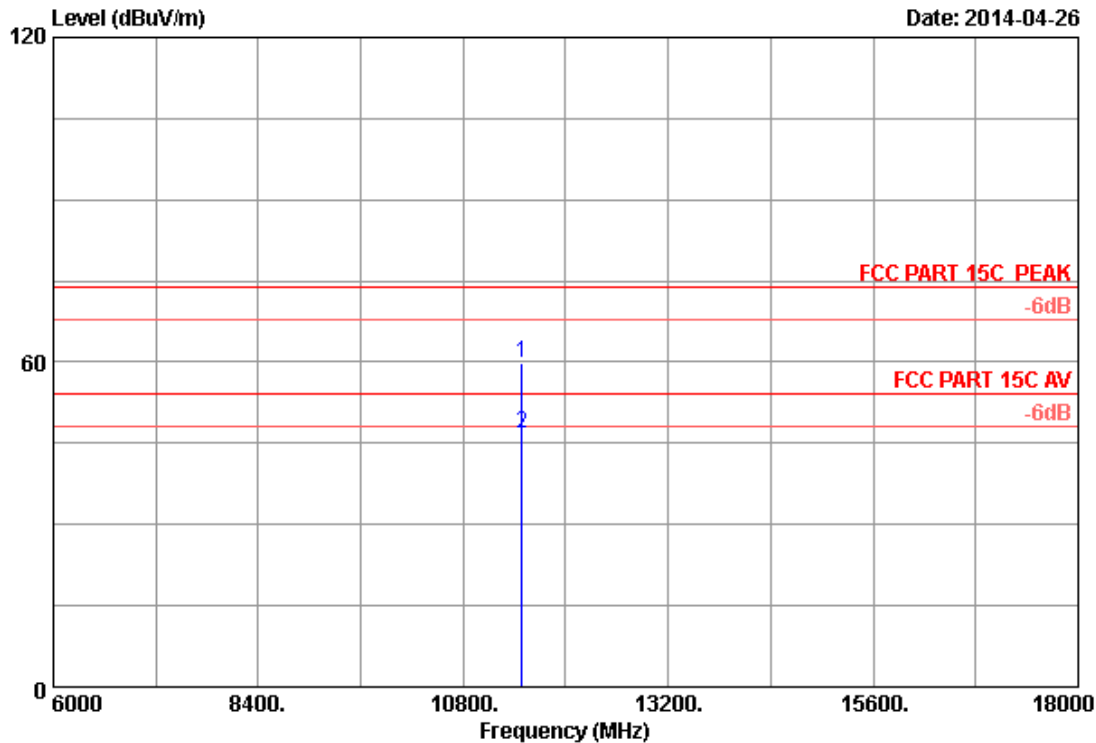

Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.69	13.28	35.28	43.14	59.83	74.00	14.17	Peak
2	11490.000	38.69	13.28	35.28	30.10	46.79	54.00	7.21	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 45

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

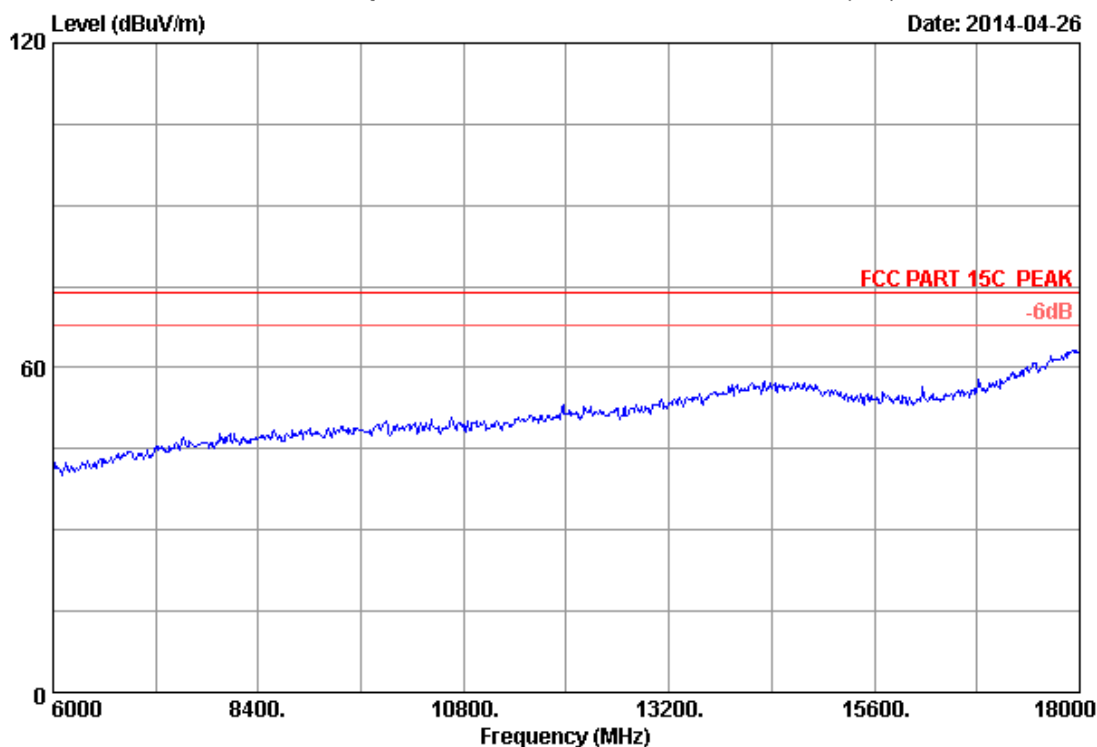


Site no.	: 3m Chamber	Data no.	: 45
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 CH149 5745MHz Tx		
M/N	: T2U		

Data: 46

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)


Date: 2014-04-26

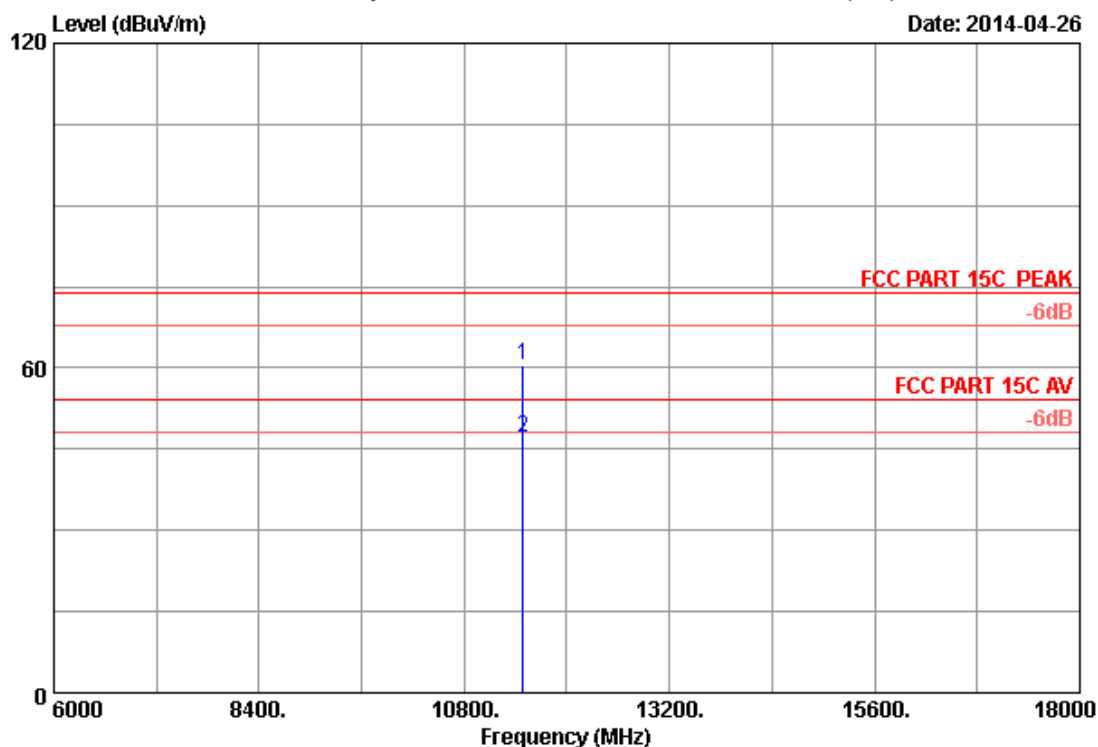

Site no. : 3m Chamber Data no. : 46
Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 24°C/56% Engineer : Leo-Li
EUT : AC600 Wireless Dual Band USB Adapter
Power Rating : DC 5V From PC Input AC 120V/60Hz
Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.69	13.28	35.28	43.89	60.58	74.00	13.42	Peak
2	11490.000	38.69	13.28	35.28	30.39	47.08	54.00	6.92	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
- Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

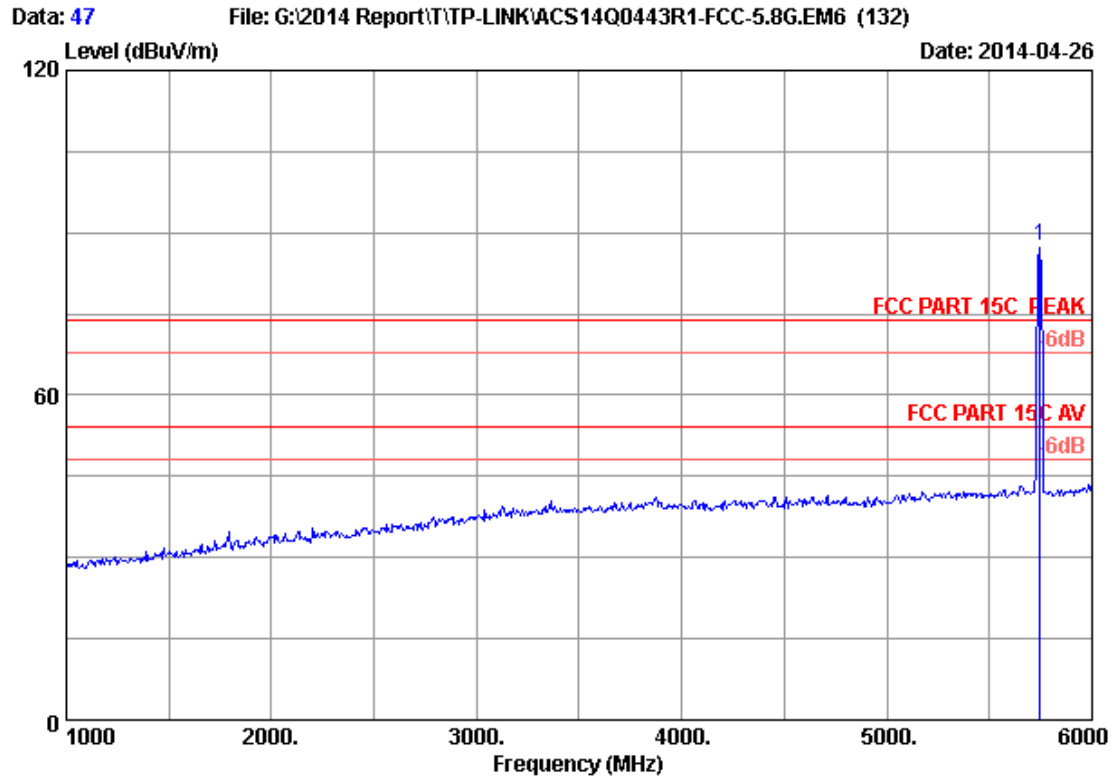

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	34.10	9.55	35.70	79.67	87.62	74.00	-13.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

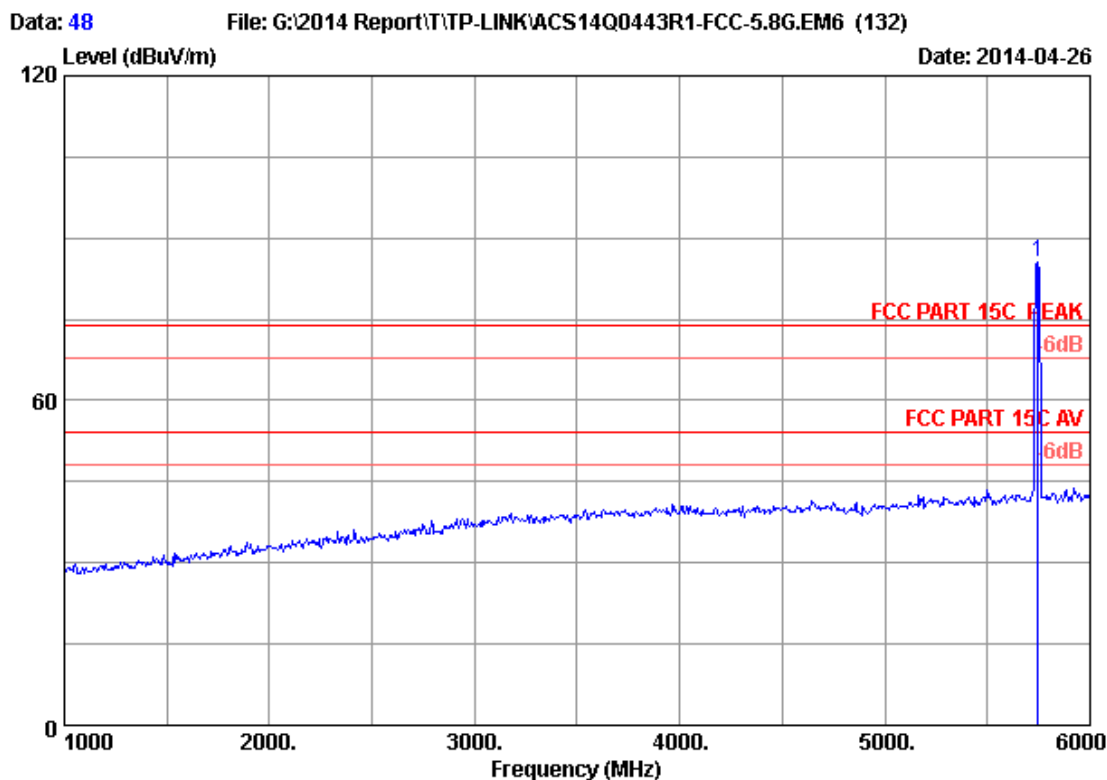

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	34.10	9.55	35.70	77.66	85.61	74.00	-11.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 57

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)


Date: 2014-04-26

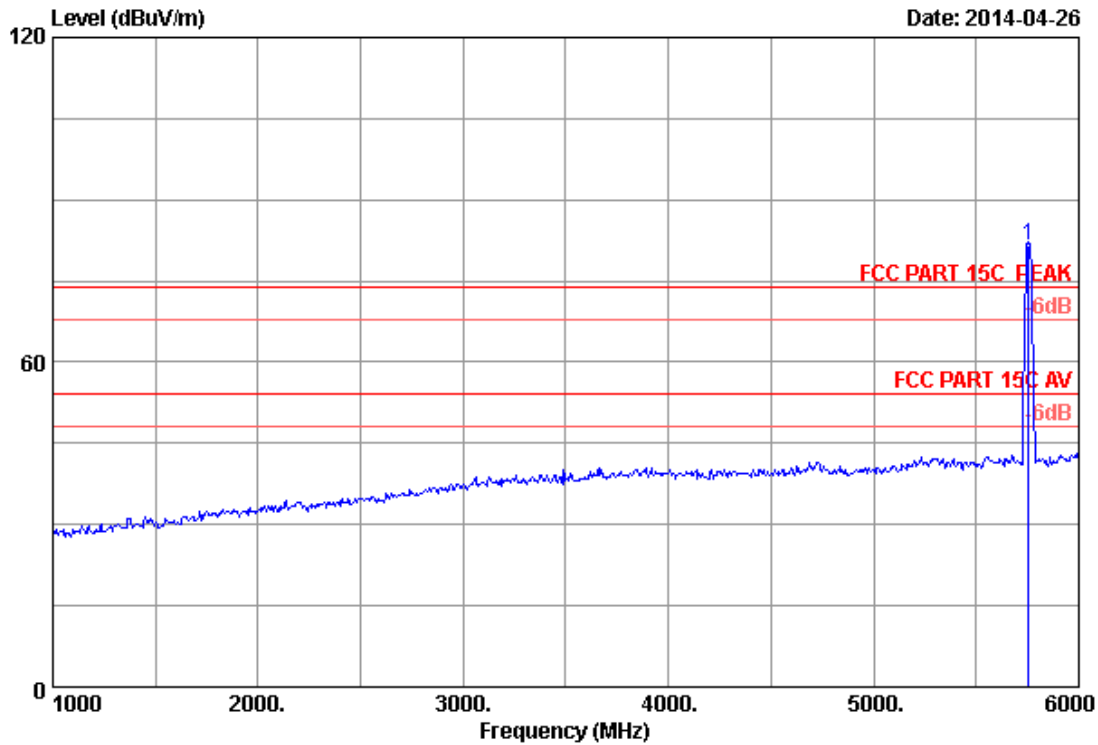

Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	34.10	9.56	35.70	73.69	81.65	74.00	-7.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

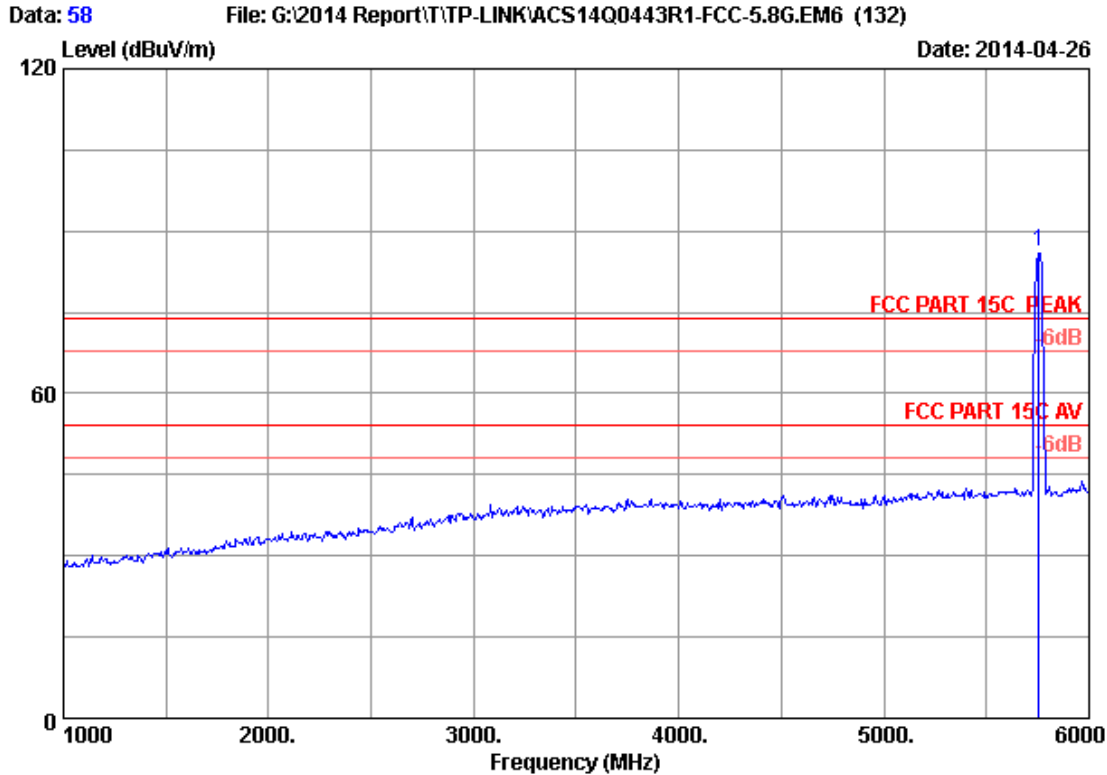

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	34.10	9.56	35.70	78.43	86.39	74.00	-12.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 59

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

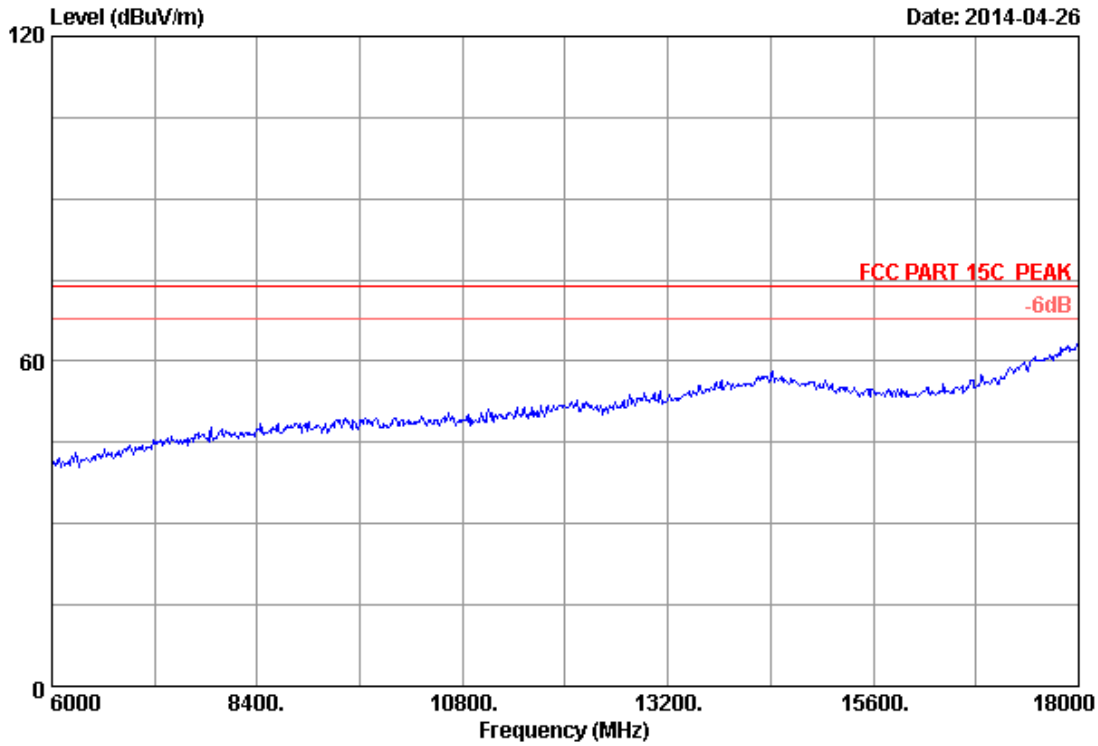

Site no.	: 3m Chamber	Data no.	: 59
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT40 CH151 5755MHz Tx		
M/N	: T2U		

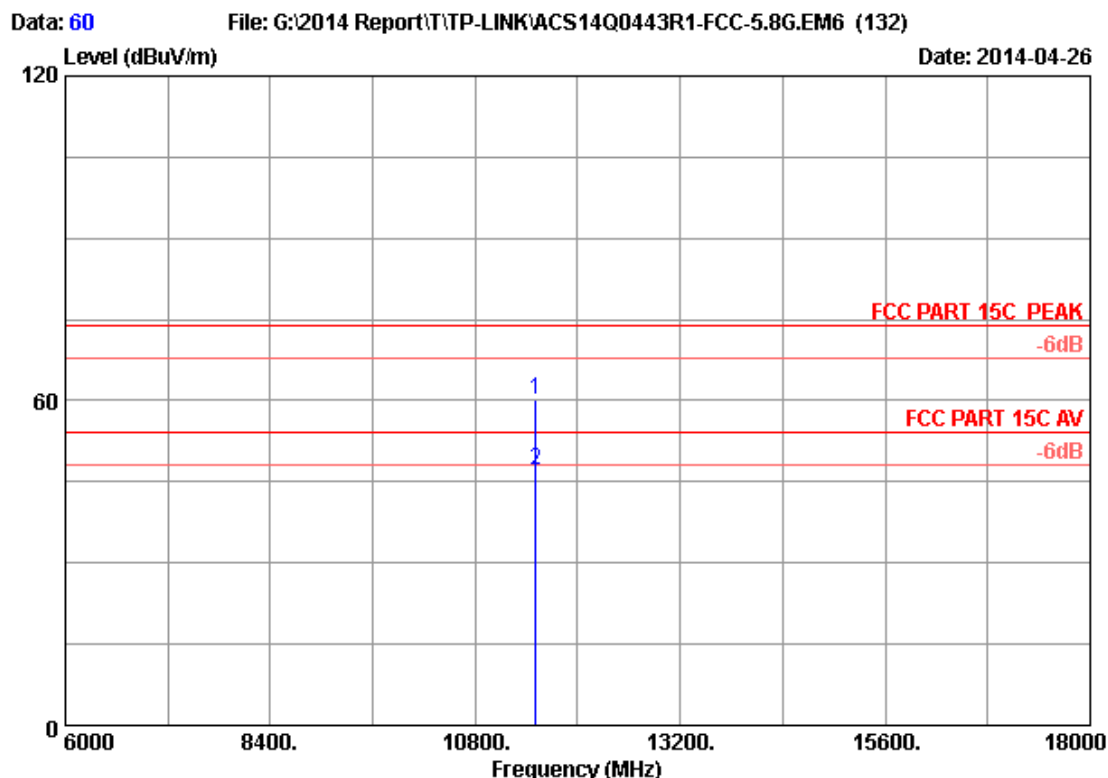

Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.000	38.71	13.29	35.27	43.53	60.26	74.00	13.74	Peak
2	11510.000	38.71	13.29	35.27	30.49	47.22	54.00	6.78	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 61

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

Level (dBuV/m)

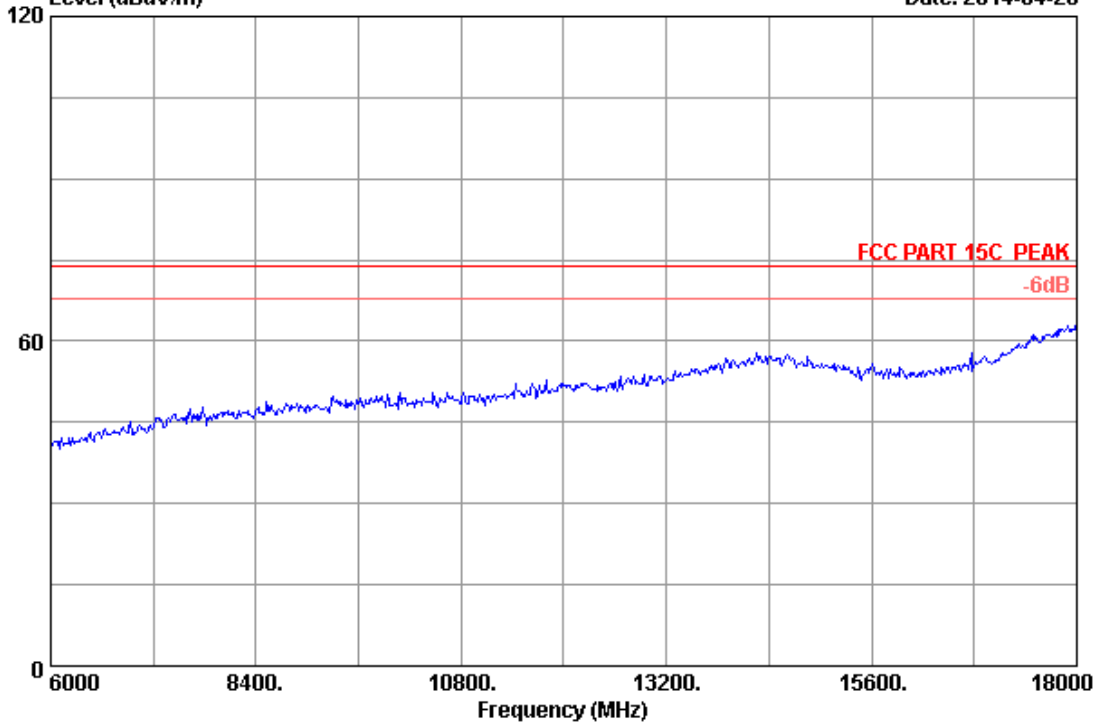


Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 M/N : T2U

Data: 62

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)


Date: 2014-04-26

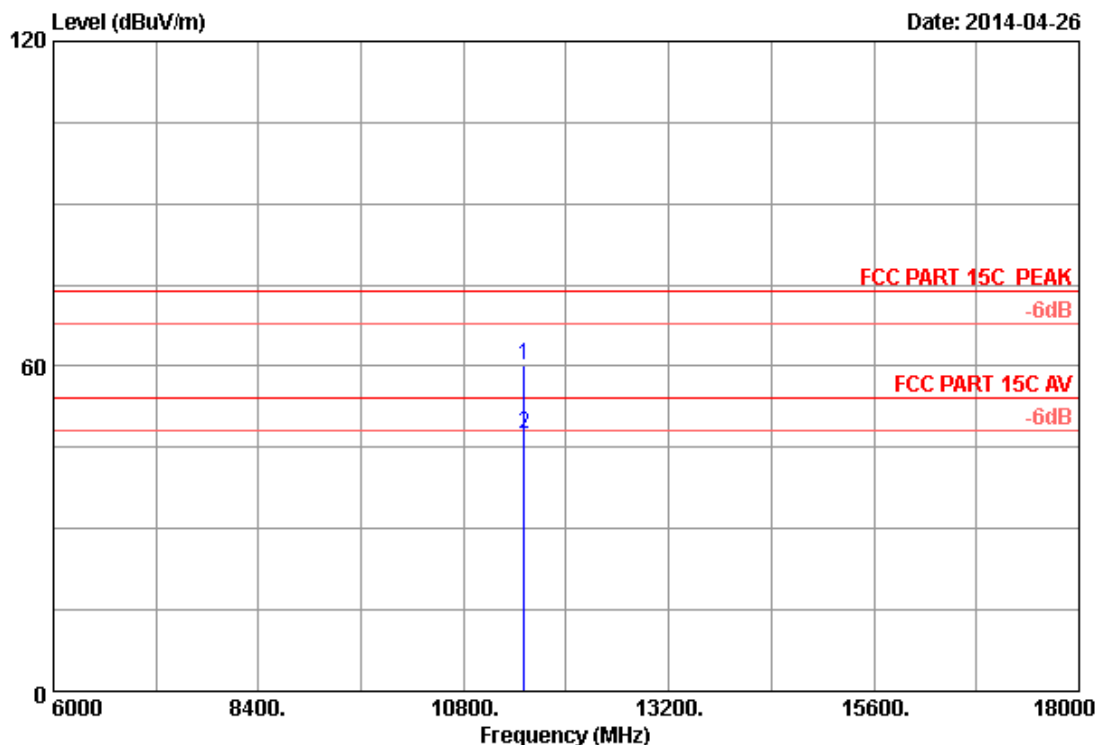


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.000	38.71	13.29	35.27	43.59	60.32	74.00	13.68	Peak
2	11510.000	38.71	13.29	35.27	30.57	47.30	54.00	6.70	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

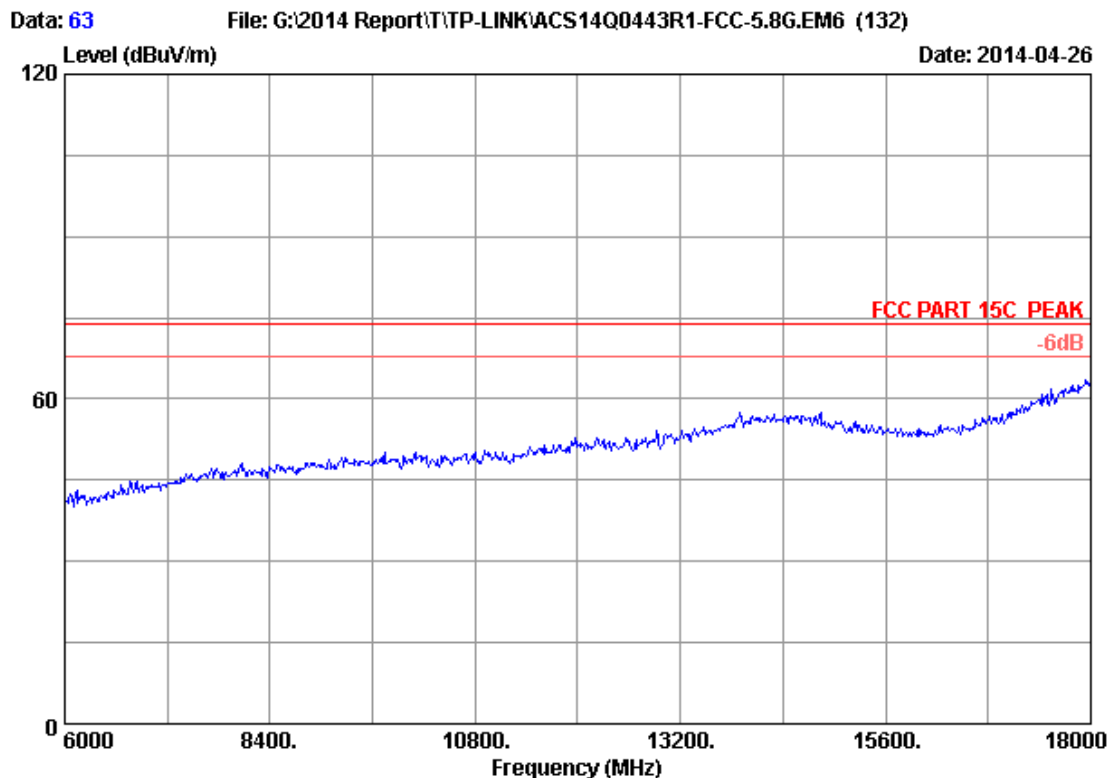

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 M/N : T2U

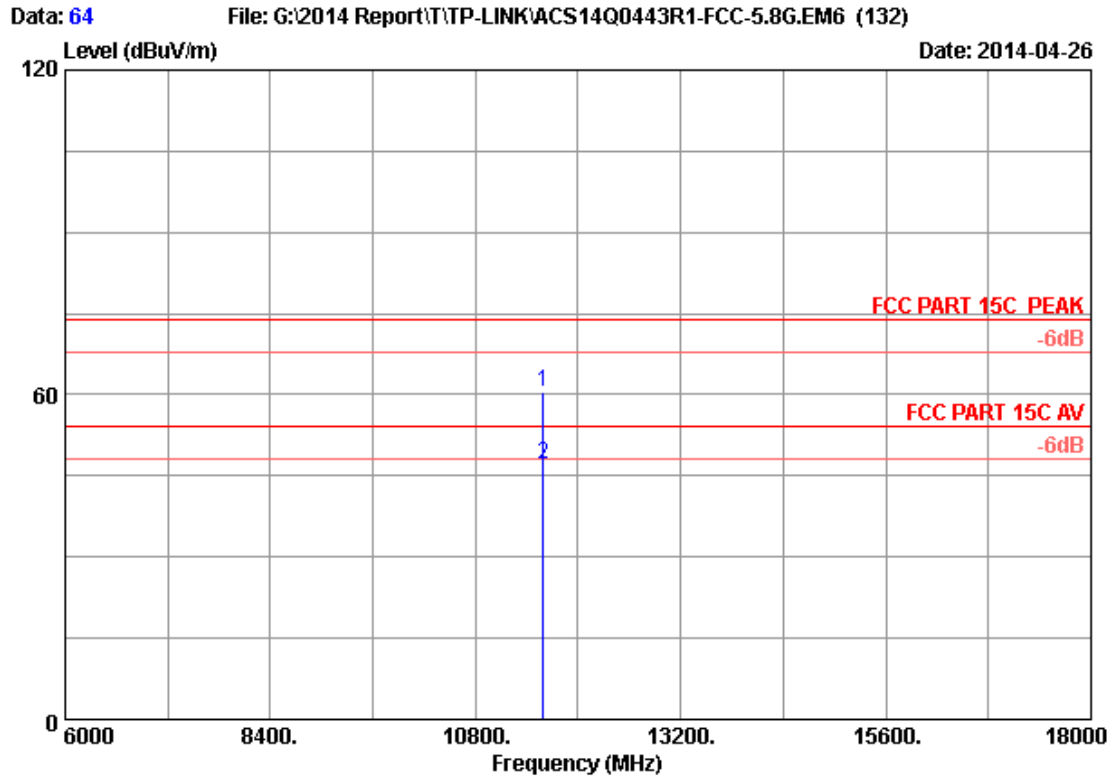

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.83	13.34	35.26	43.49	60.40	74.00	13.60	Peak
2	11590.000	38.83	13.34	35.26	30.11	47.02	54.00	6.98	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 65

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

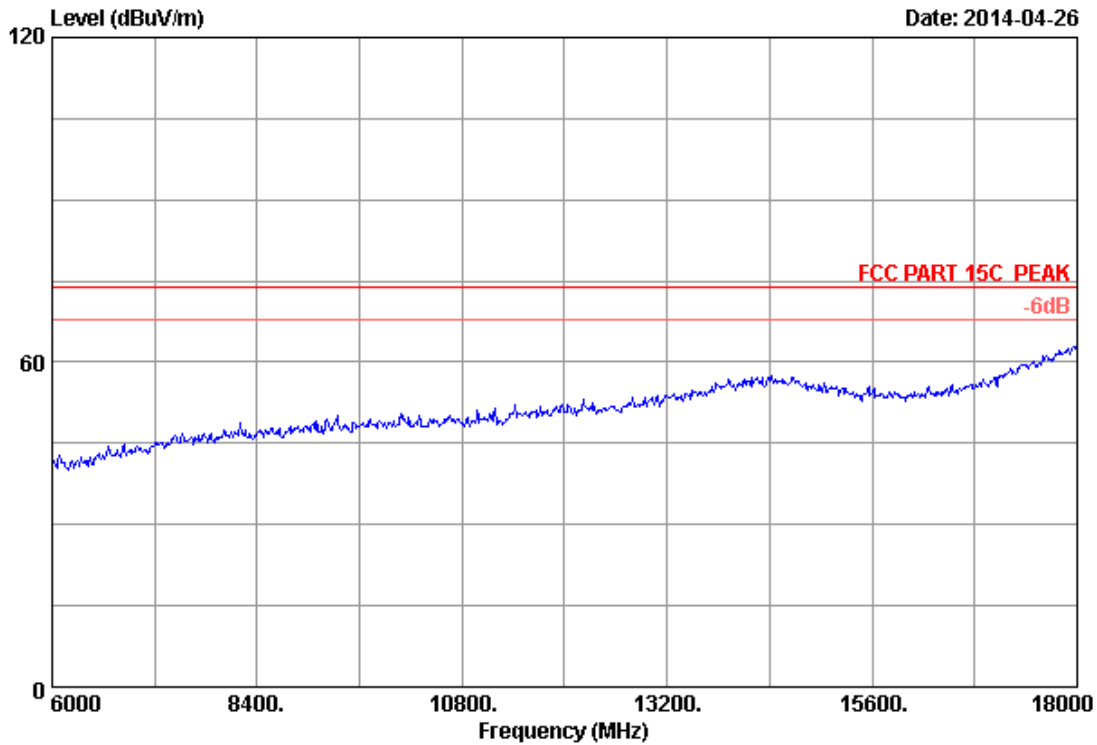


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 M/N : T2U

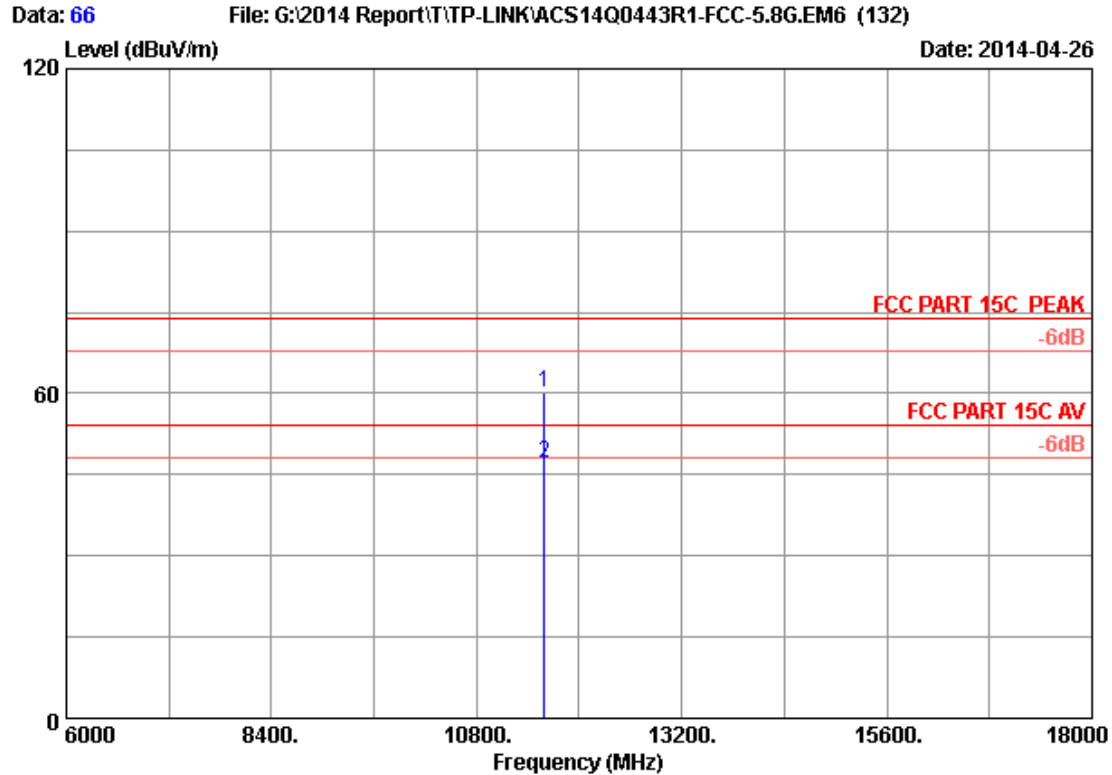

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.83	13.34	35.26	43.26	60.17	74.00	13.83	Peak
2	11590.000	38.83	13.34	35.26	30.07	46.98	54.00	7.02	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

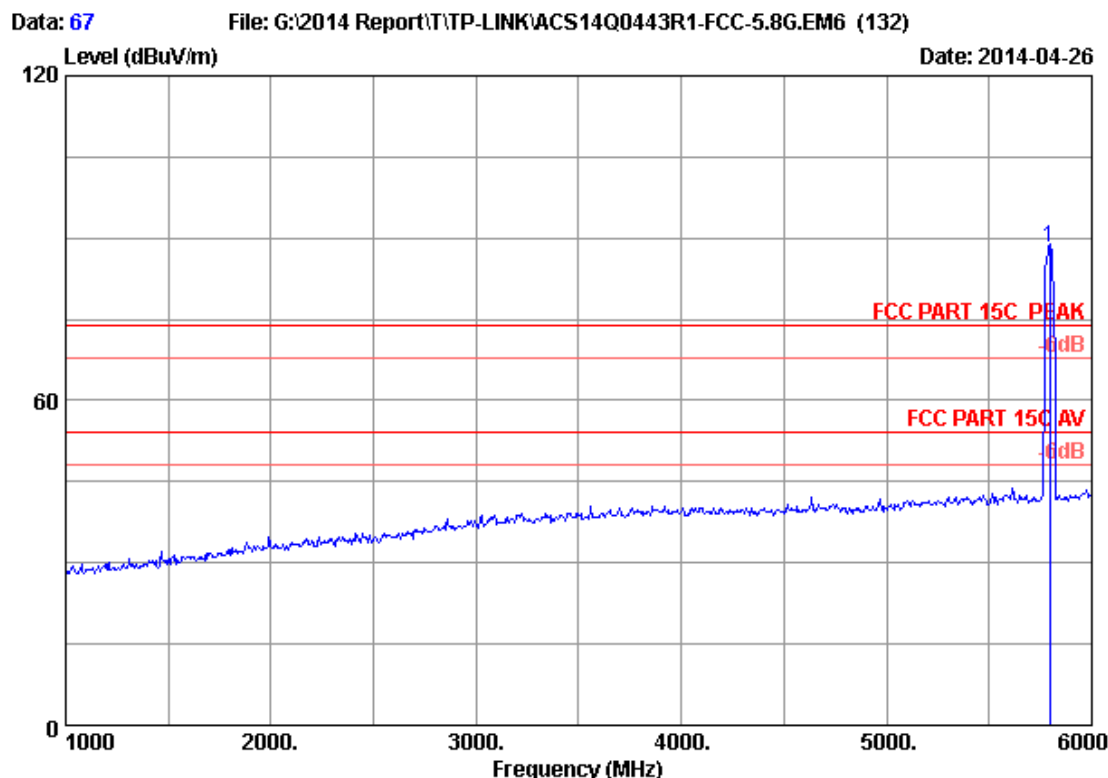

Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	34.12	9.60	35.70	80.35	88.37	74.00	-14.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

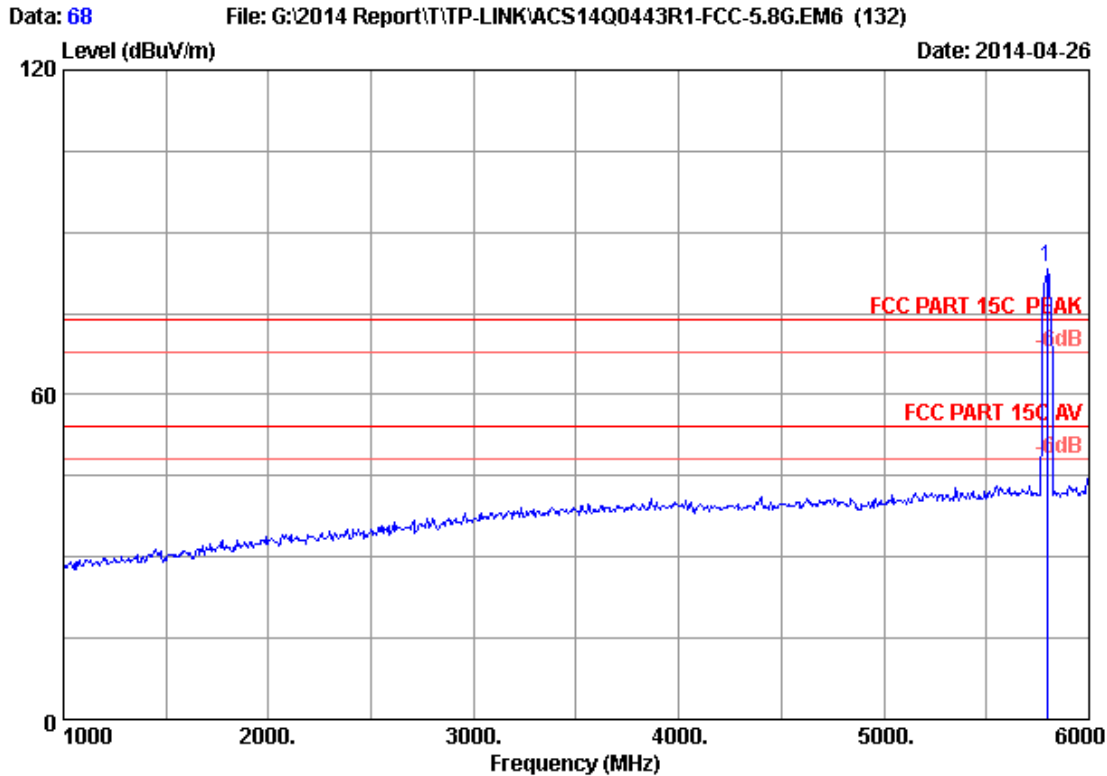

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	5795.000	34.12	9.60	35.70	75.62	83.64	74.00	-9.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

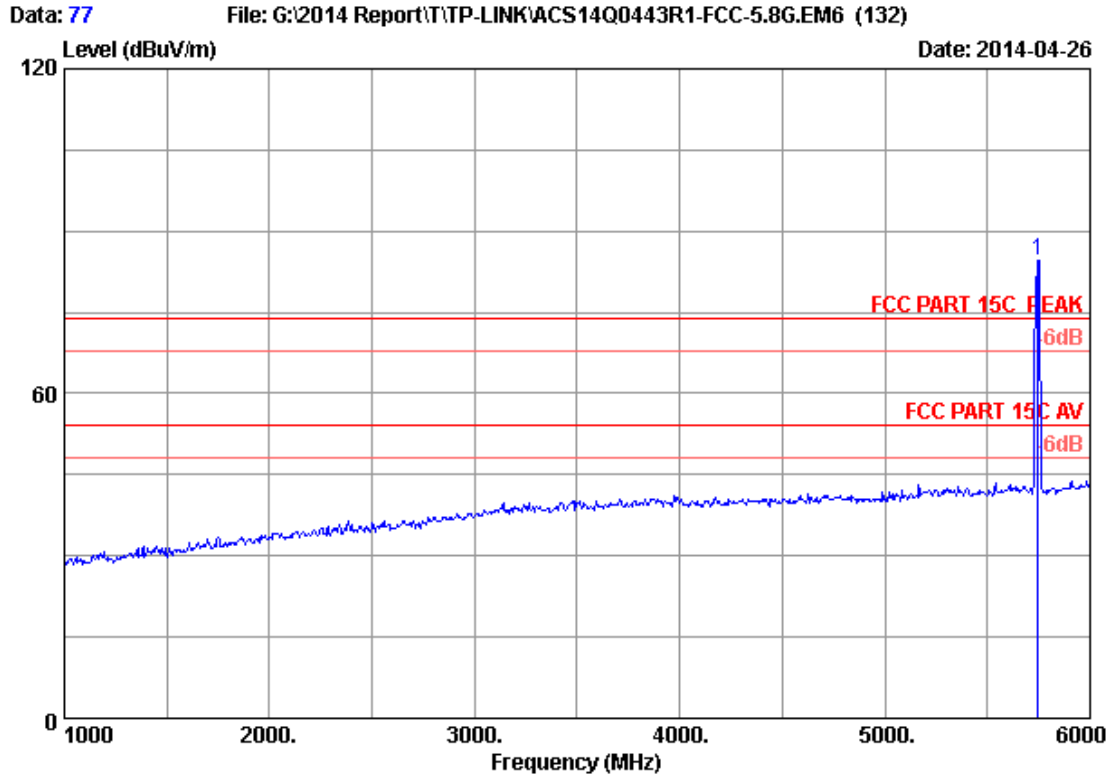

Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	34.10	9.55	35.70	76.65	84.60	74.00	-10.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 78

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

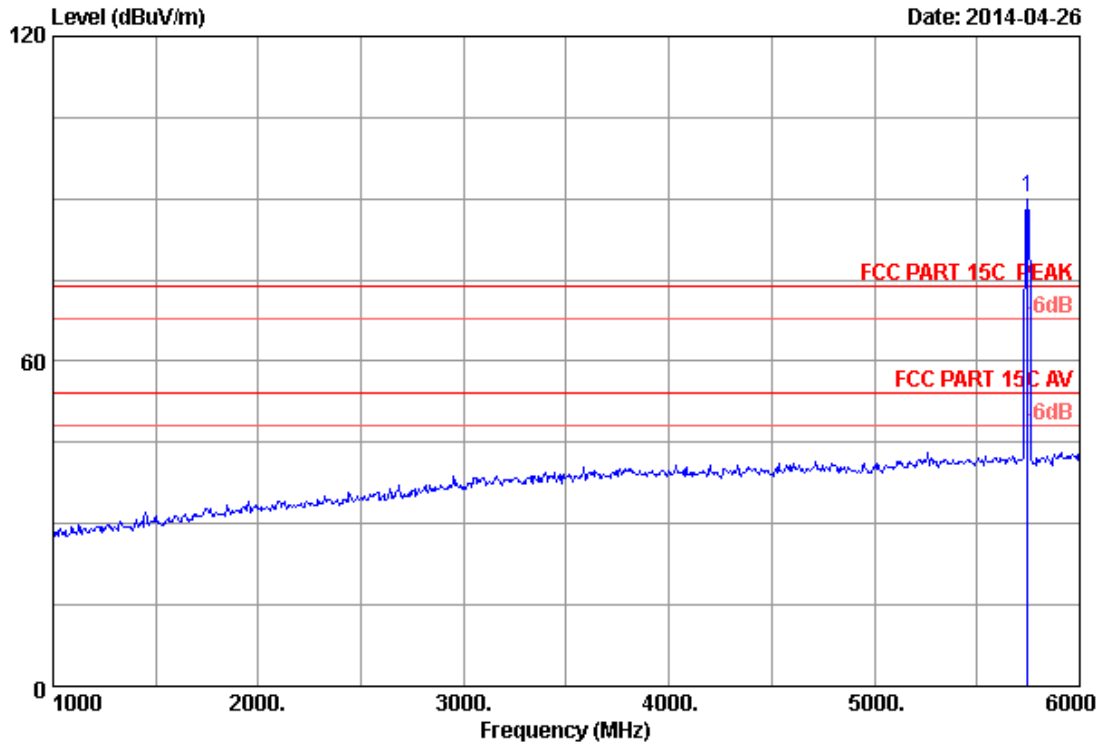

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	34.10	9.55	35.70	82.36	90.31	74.00	-16.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 79

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

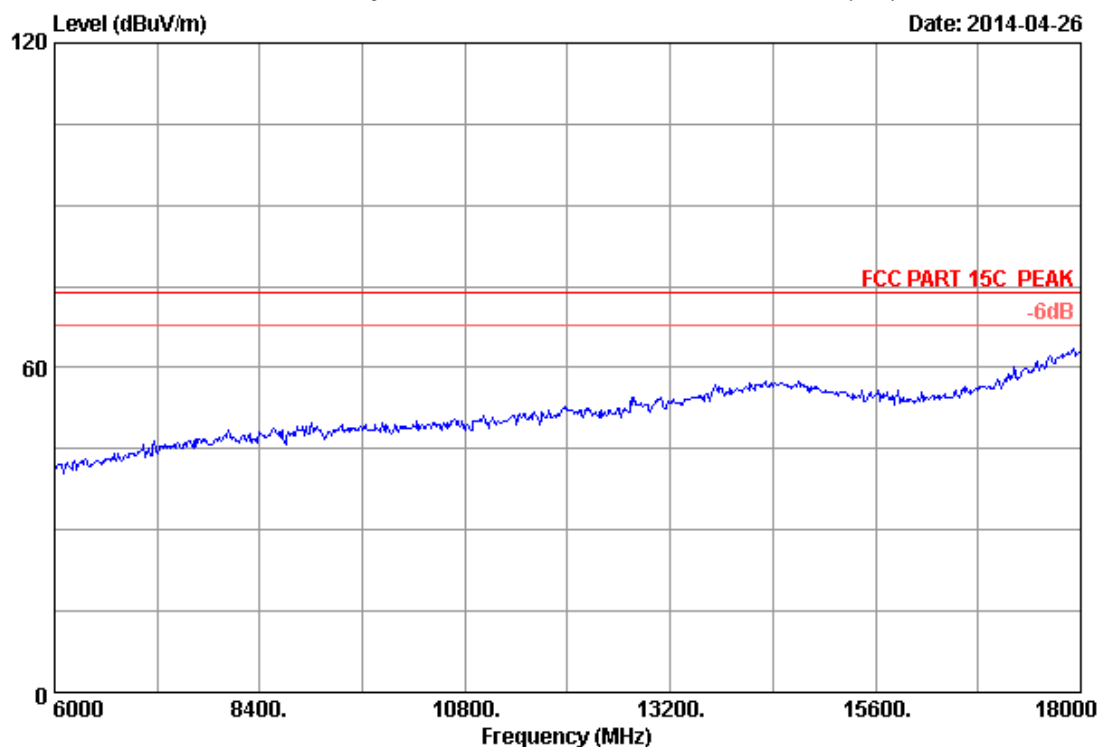


Site no.	: 3m Chamber	Data no.	: 79
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT20 CH149 5745MHz Tx		
M/N	: T2U		

Data: 80

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

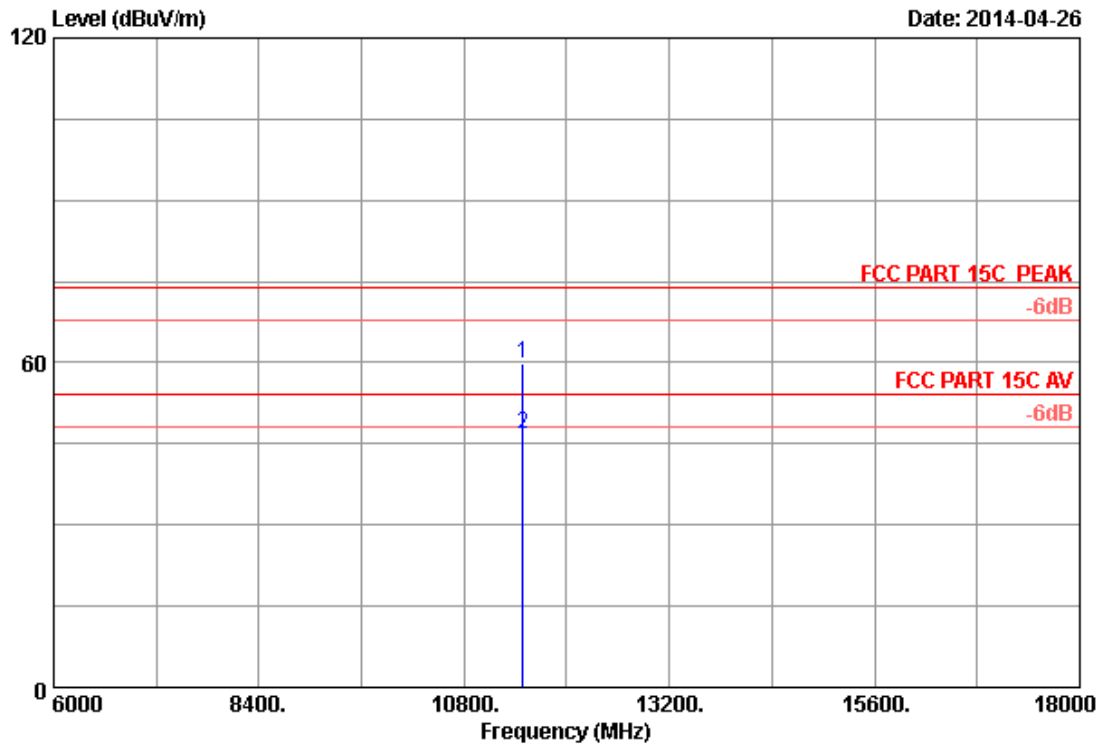

Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.69	13.28	35.28	43.23	59.92	74.00	14.08	Peak
2	11490.000	38.69	13.28	35.28	30.17	46.86	54.00	7.14	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 81

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

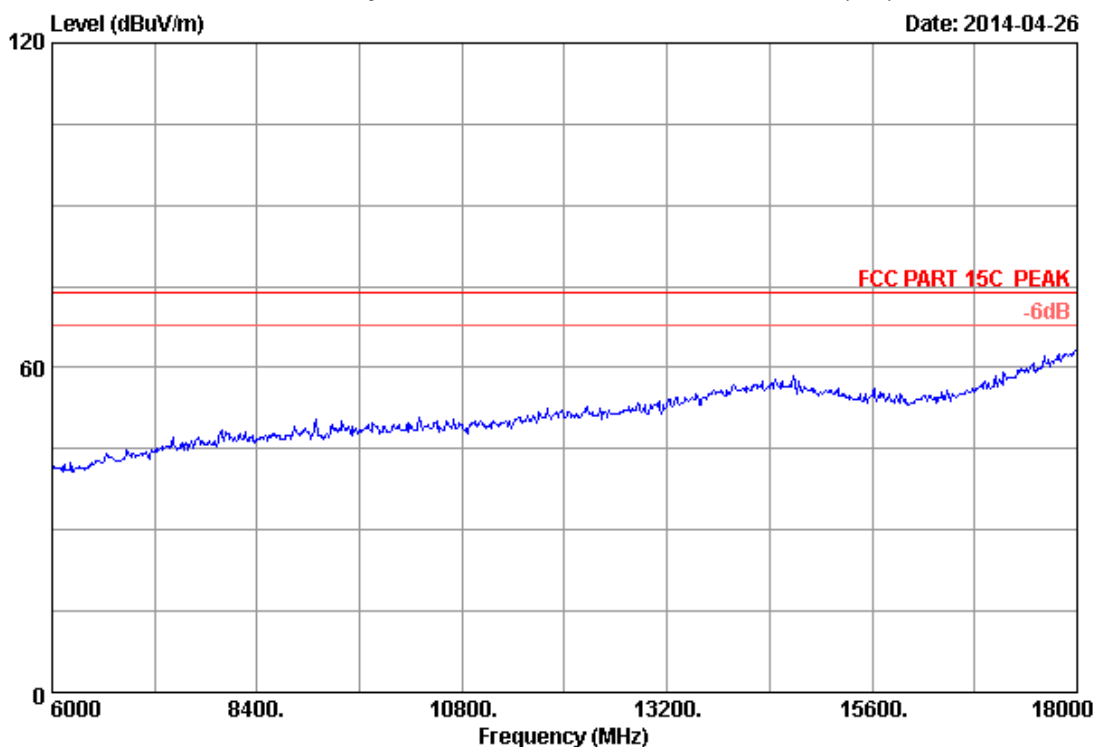

Site no.	: 3m Chamber	Data no.	: 81
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT20 CH149 5745MHz Tx		
M/N	: T2U		

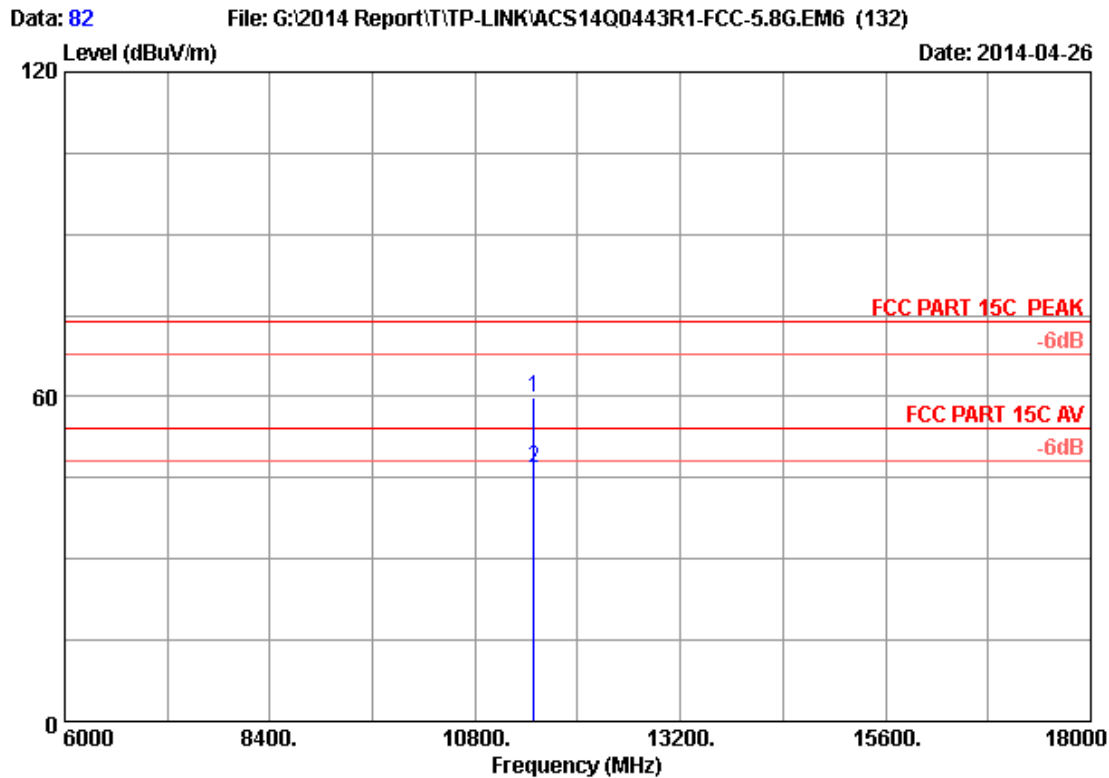

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH149 5745MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.000	38.69	13.28	35.28	43.09	59.78	74.00	14.22	Peak
2	11490.000	38.69	13.28	35.28	30.23	46.92	54.00	7.08	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 83

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

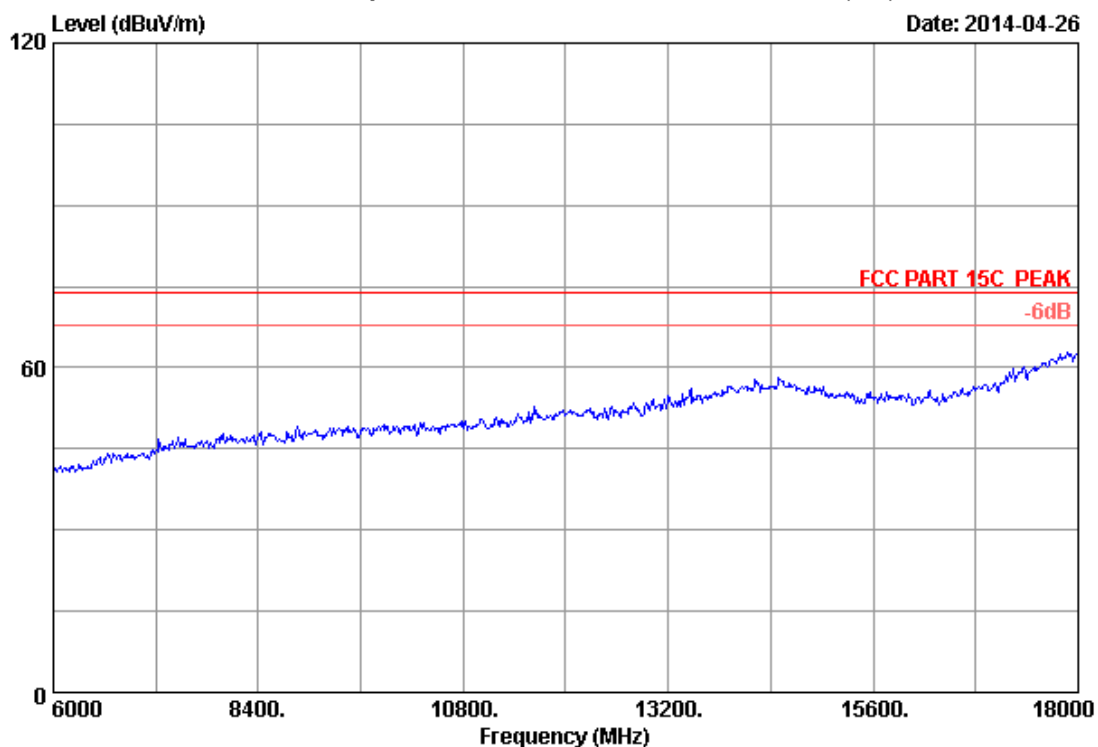

Site no.	: 3m Chamber	Data no.	: 83
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT20 CH157 5785MHz Tx		
M/N	: T2U		

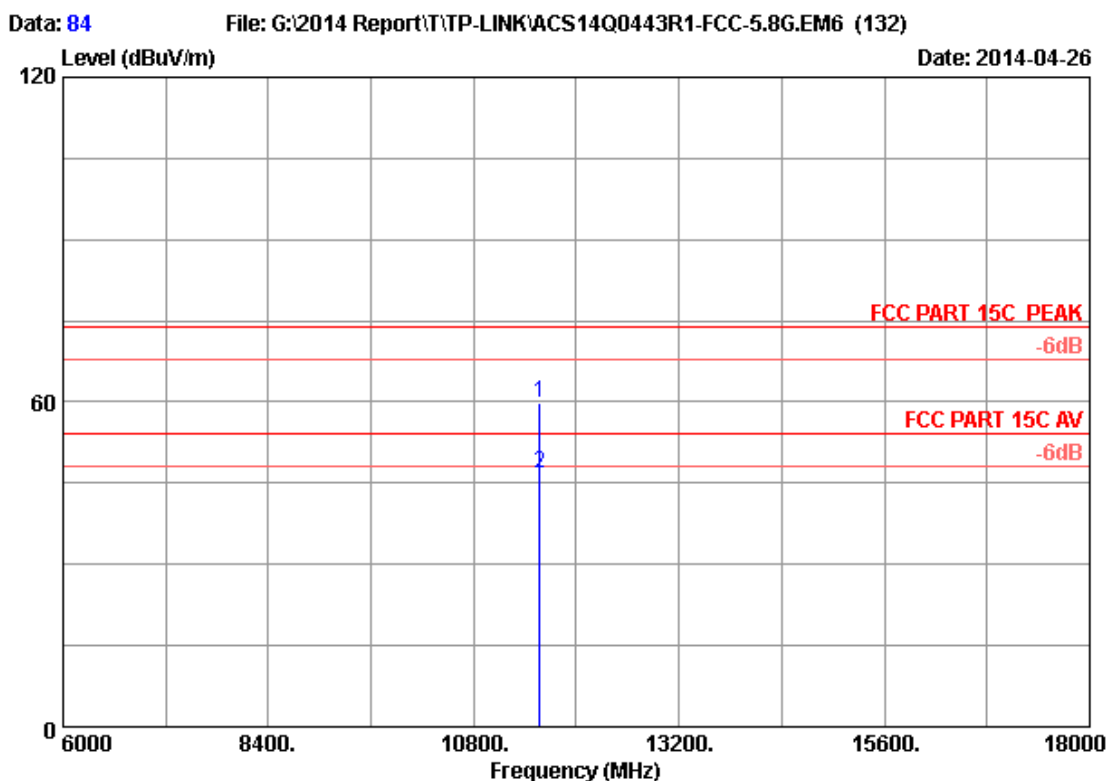

Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.80	13.32	35.26	42.97	59.83	74.00	14.17	Peak
2	11570.000	38.80	13.32	35.26	30.07	46.93	54.00	7.07	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 85

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

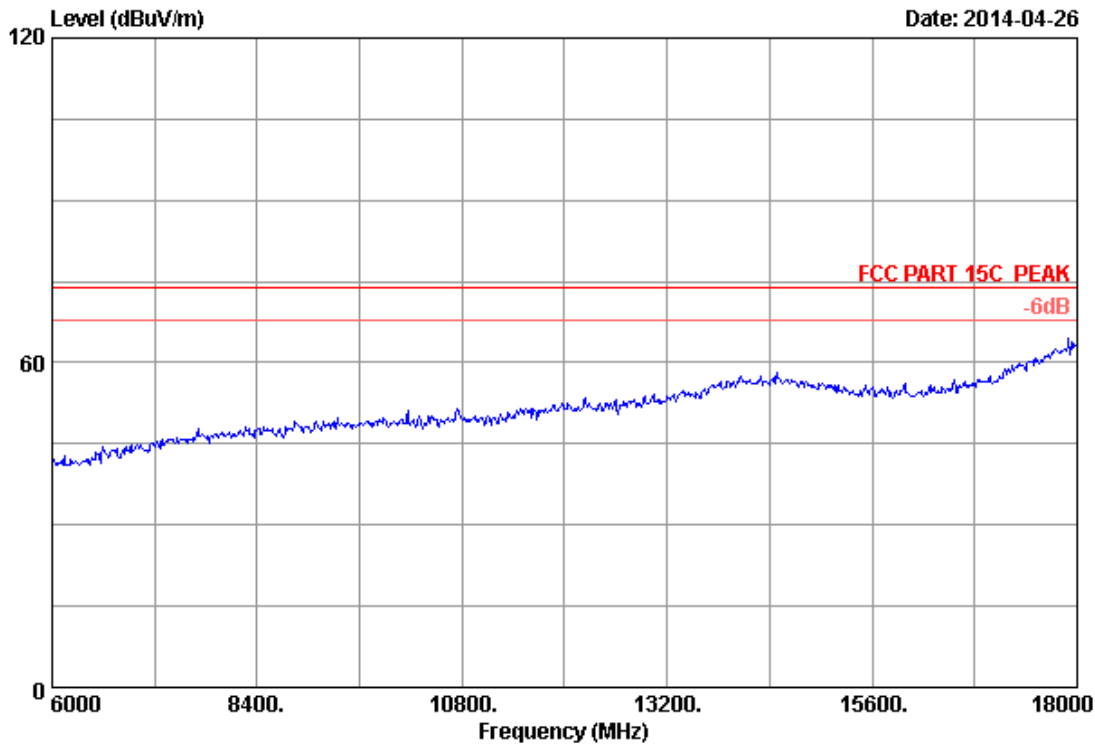


Site no.	: 3m Chamber	Data no.	: 85
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT20 CH157 5785MHz Tx		
M/N	: T2U		

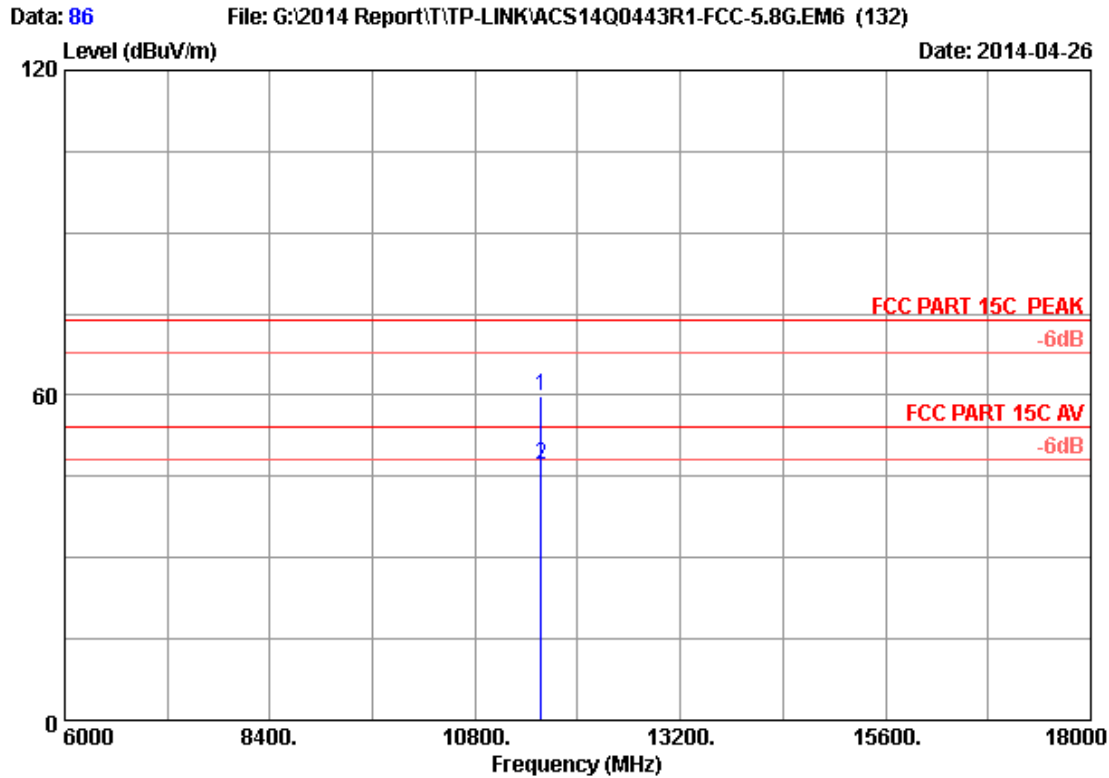

Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.000	38.80	13.32	35.26	43.11	59.97	74.00	14.03	Peak
2	11570.000	38.80	13.32	35.26	30.29	47.15	54.00	6.85	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

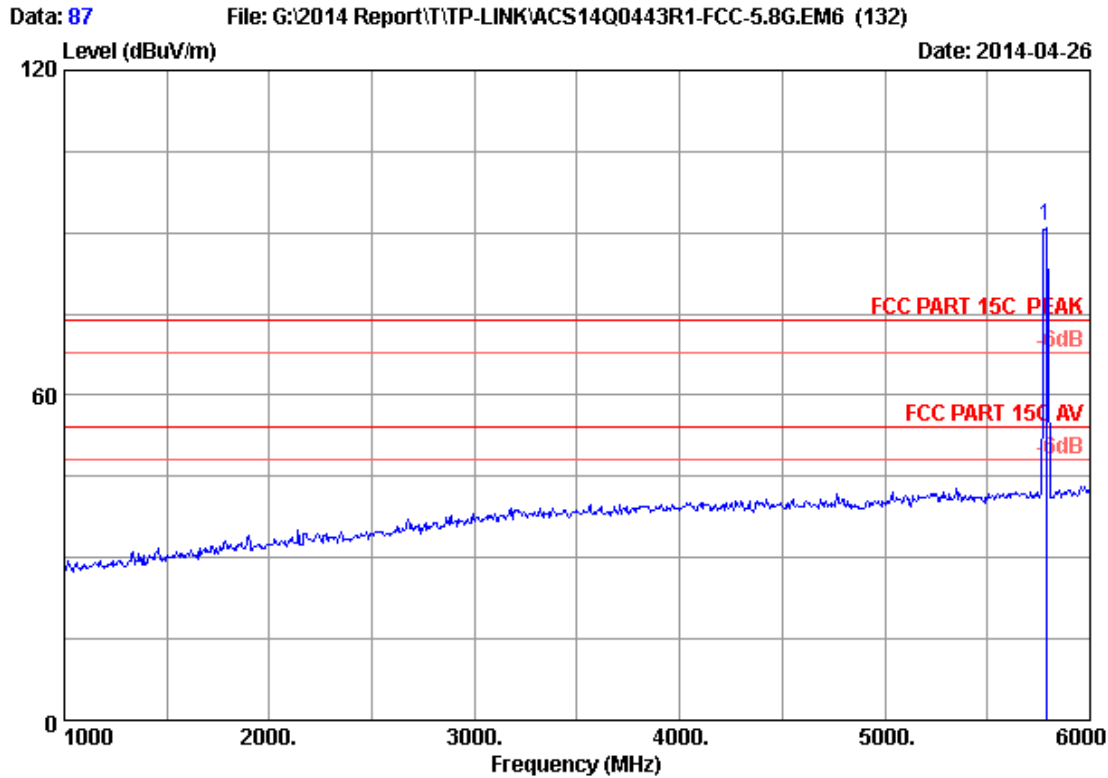

Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Cable AMP			Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	34.11	9.59	35.70	83.20	91.20	74.00	-17.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

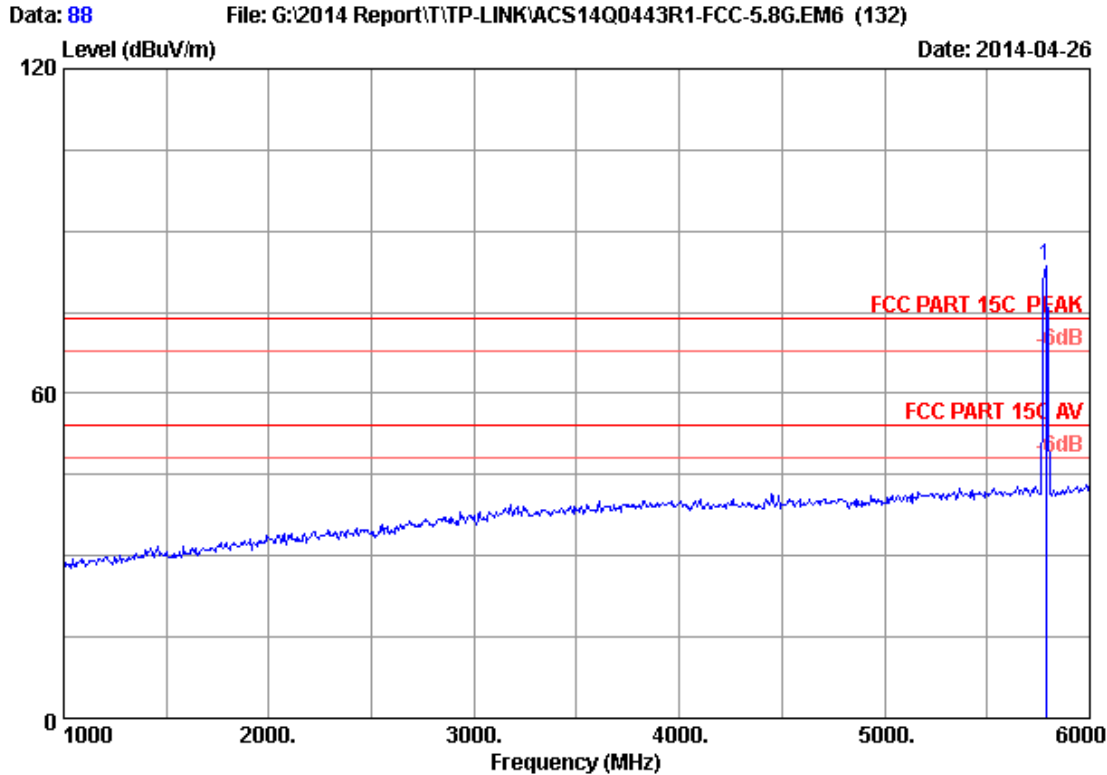

Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH157 5785MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	5785.000	34.11	9.59	35.70	75.51	83.51	74.00	-9.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

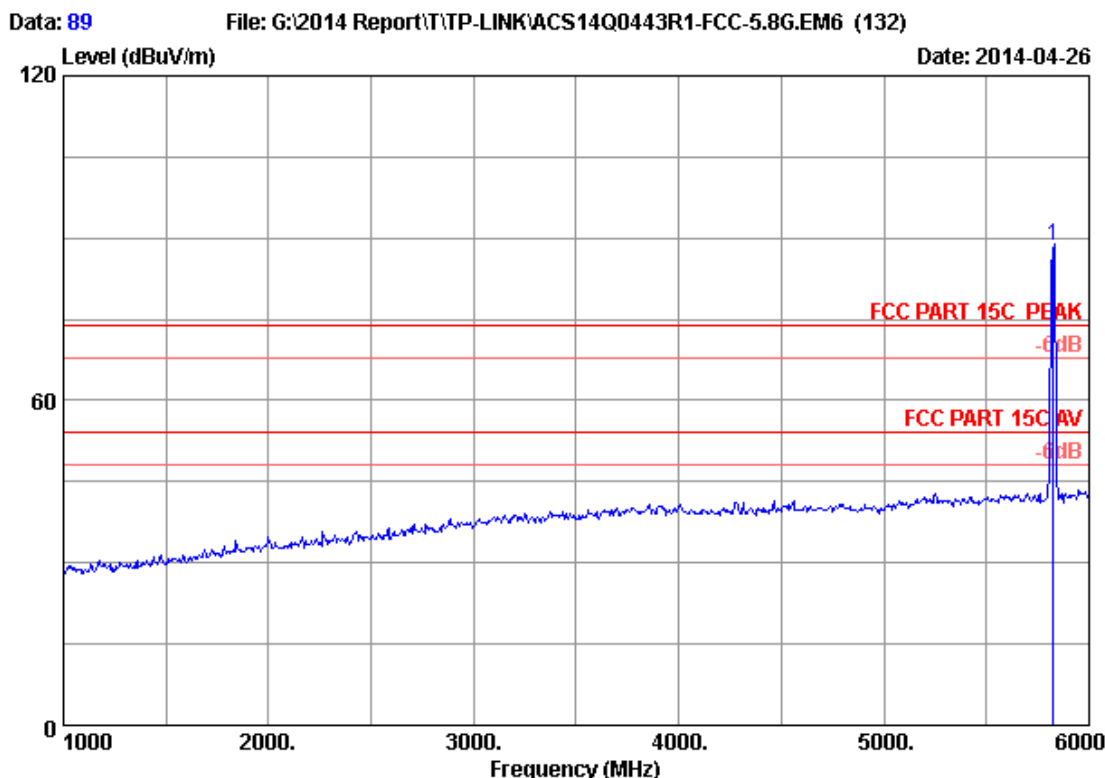

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Cable AMP			Emission				Remark
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	5825.000	34.13	9.63	35.70	80.67	88.73	74.00	-14.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

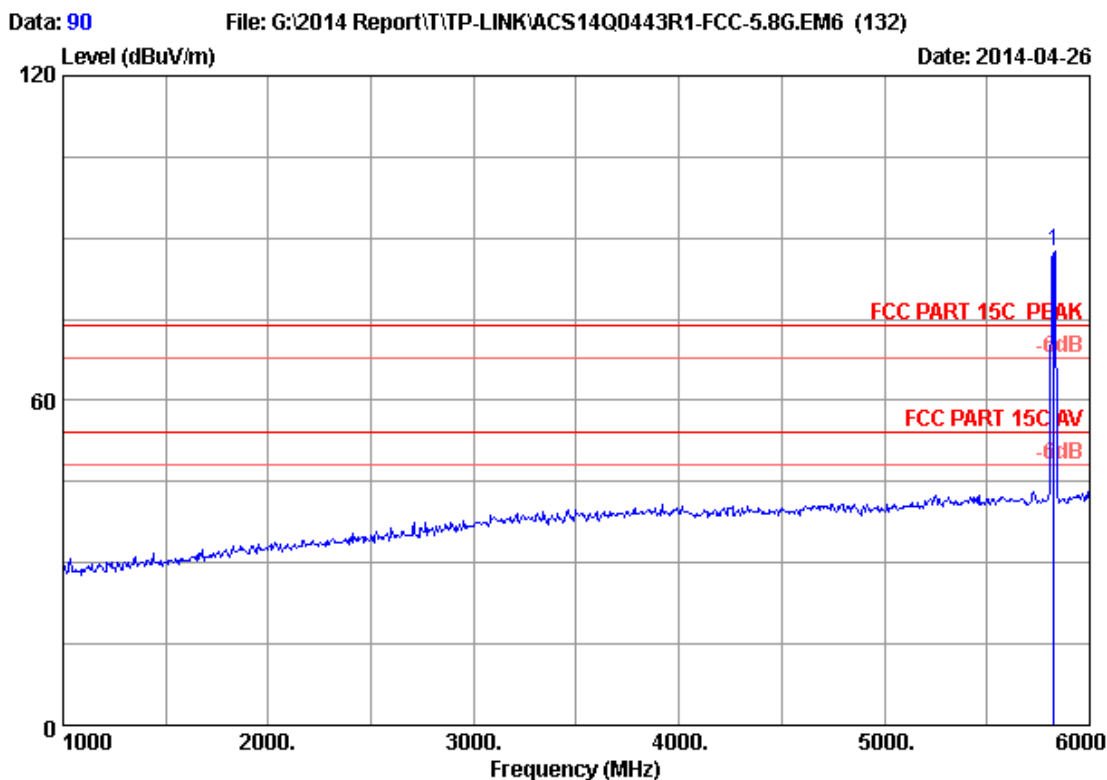

Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	34.13	9.63	35.70	79.63	87.69	74.00	-13.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 95

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

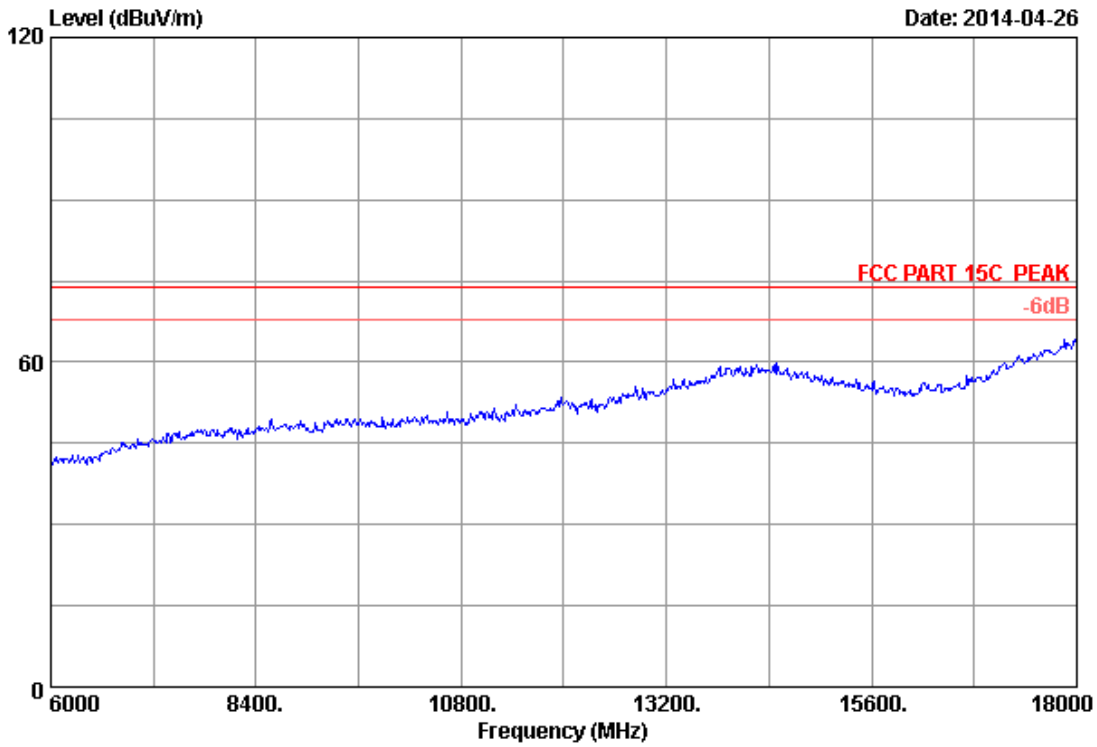


Site no.	: 3m Chamber	Data no.	: 95
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT20 CH165 5825MHz Tx		
M/N	: T2U		

Data: 96

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

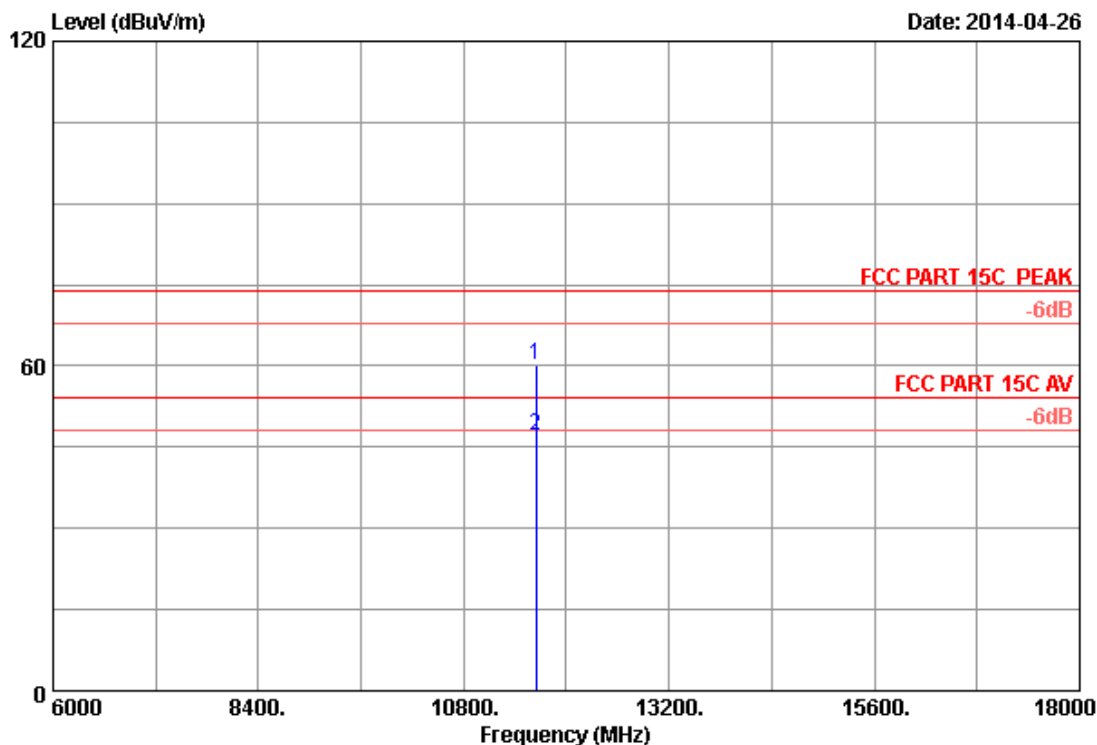

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.91	13.37	35.25	43.22	60.25	74.00	13.75	Peak
2	11650.000	38.91	13.37	35.25	30.27	47.30	54.00	6.70	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 97

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

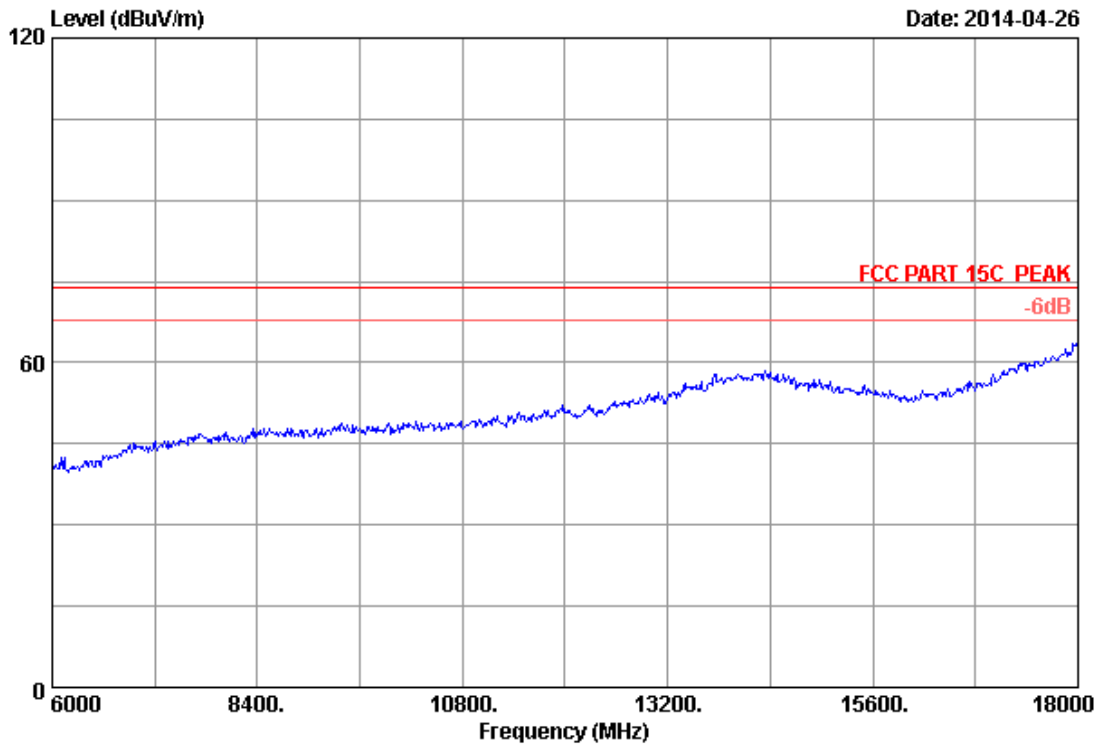

Site no.	: 3m Chamber	Data no.	: 97
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT20 CH165 5825MHz Tx		
M/N	: T2U		

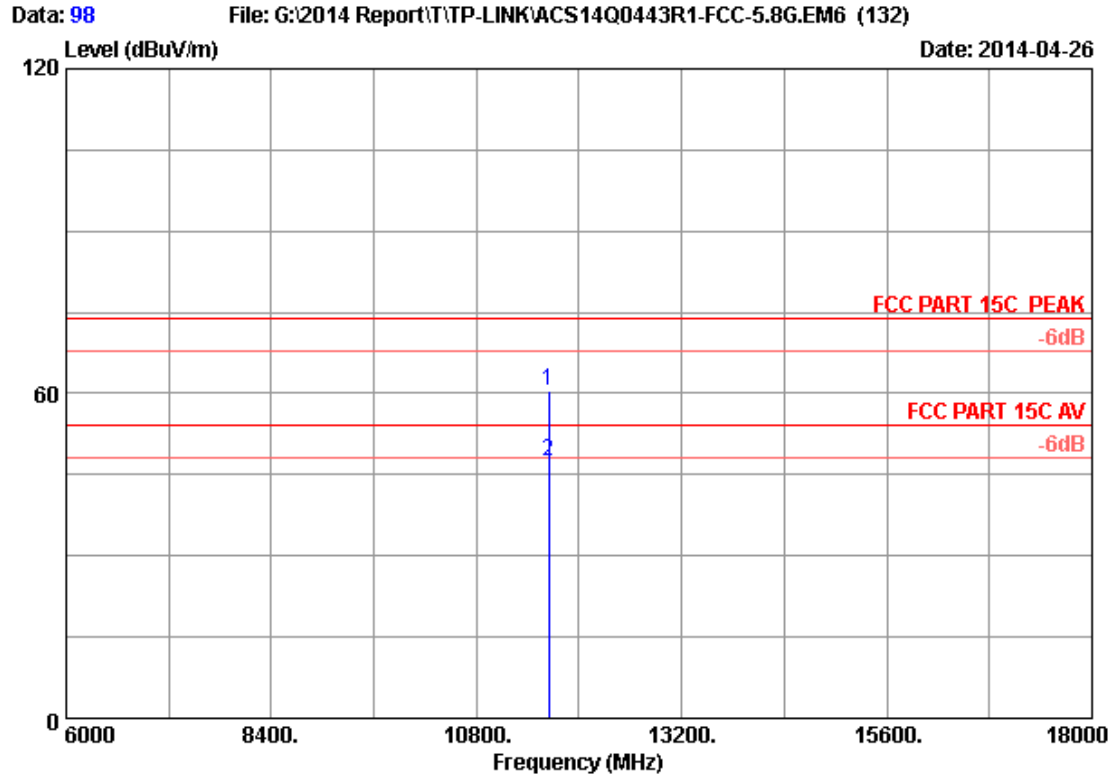

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 CH165 5825MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.000	38.91	13.37	35.25	43.64	60.67	74.00	13.33	Peak
2	11650.000	38.91	13.37	35.25	30.47	47.50	54.00	6.50	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 99

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

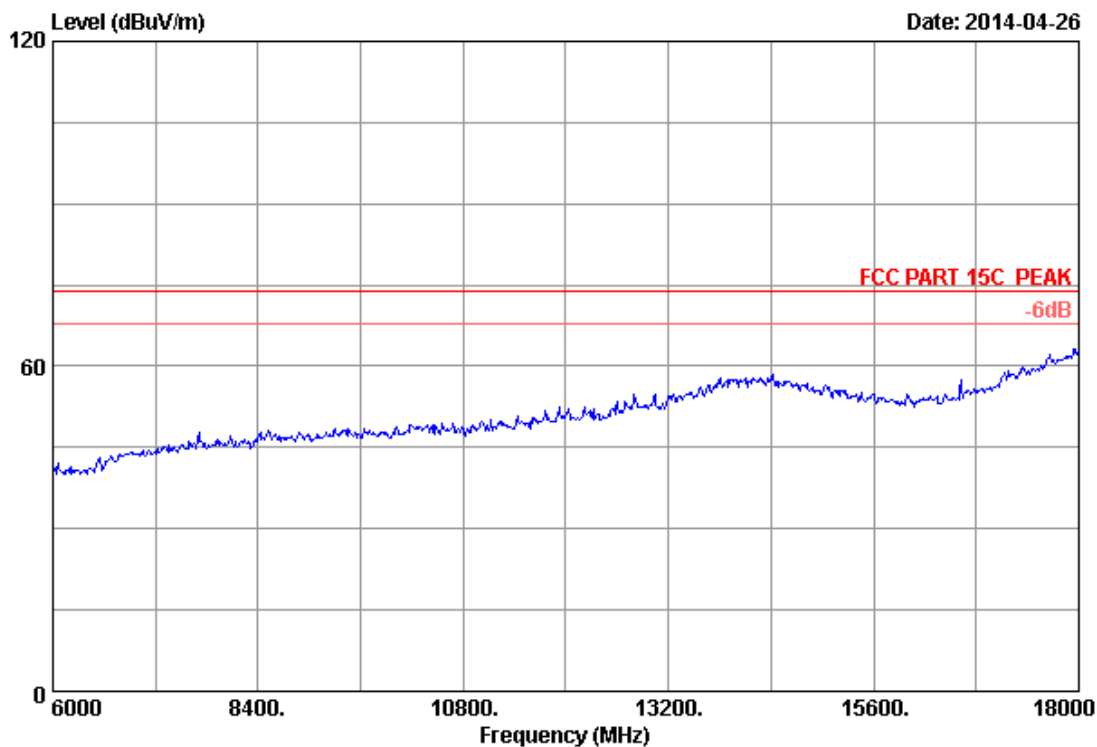

Site no.	: 3m Chamber	Data no.	: 99
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT40 CH151 5755MHz Tx		
M/N	: T2U		

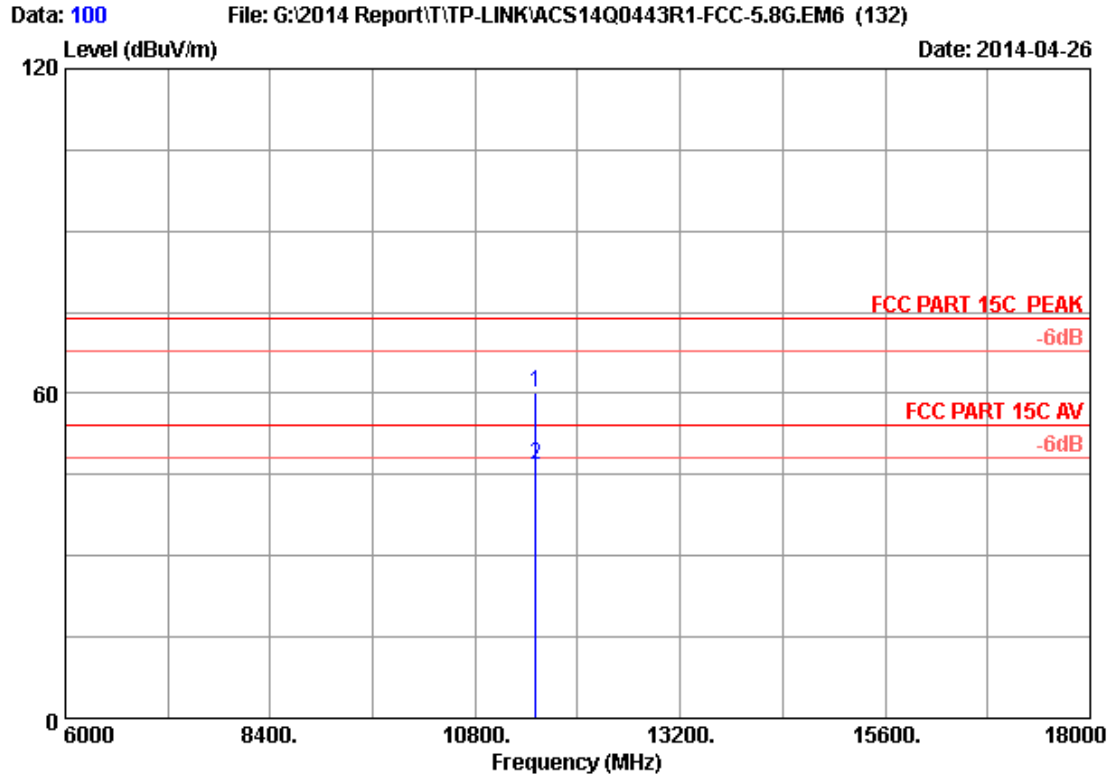

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.000	38.71	13.29	35.27	43.57	60.30	74.00	13.70	Peak
2	11510.000	38.71	13.29	35.27	30.18	46.91	54.00	7.09	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 101

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

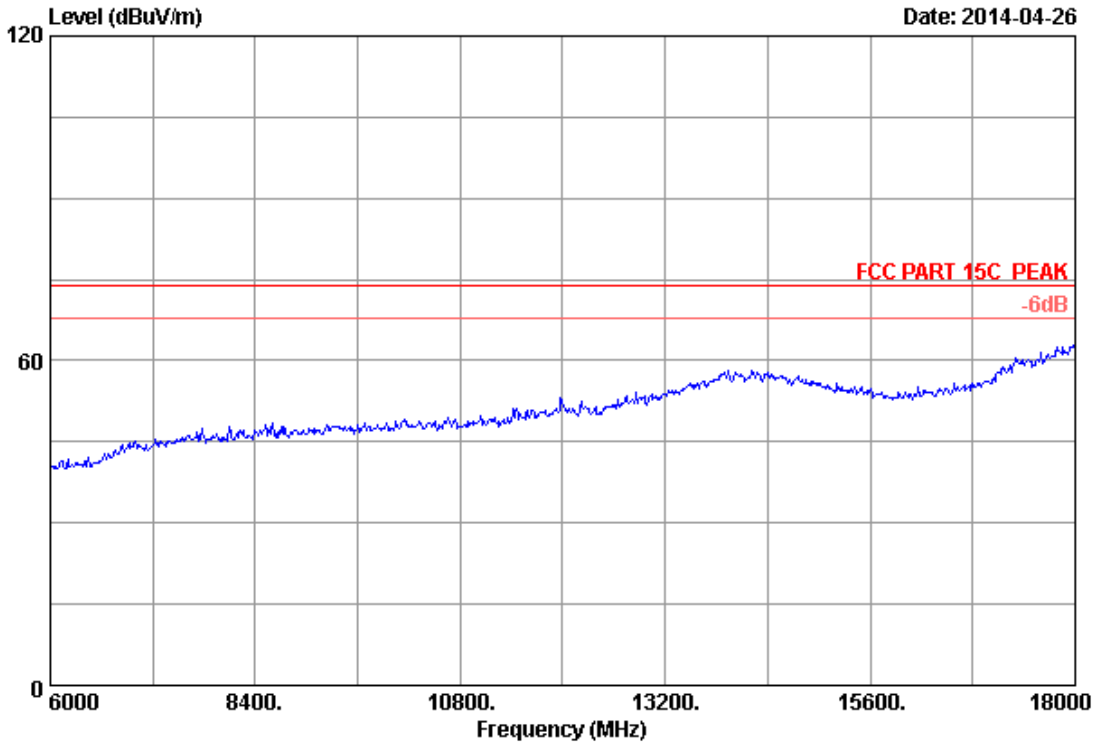


Site no.	: 3m Chamber	Data no.	: 101
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT40 CH151 5755MHz Tx		
M/N	: T2U		

Data: 102

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)


Date: 2014-04-26

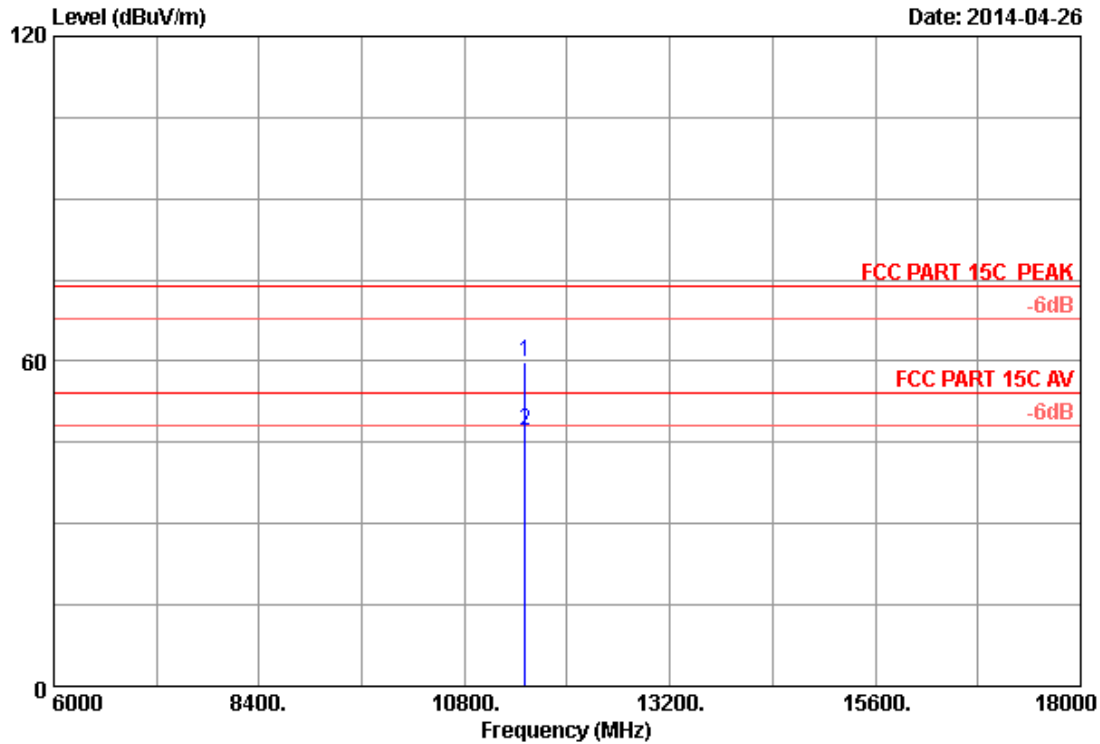

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.000	38.71	13.29	35.27	43.15	59.88	74.00	14.12	Peak
2	11510.000	38.71	13.29	35.27	30.24	46.97	54.00	7.03	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

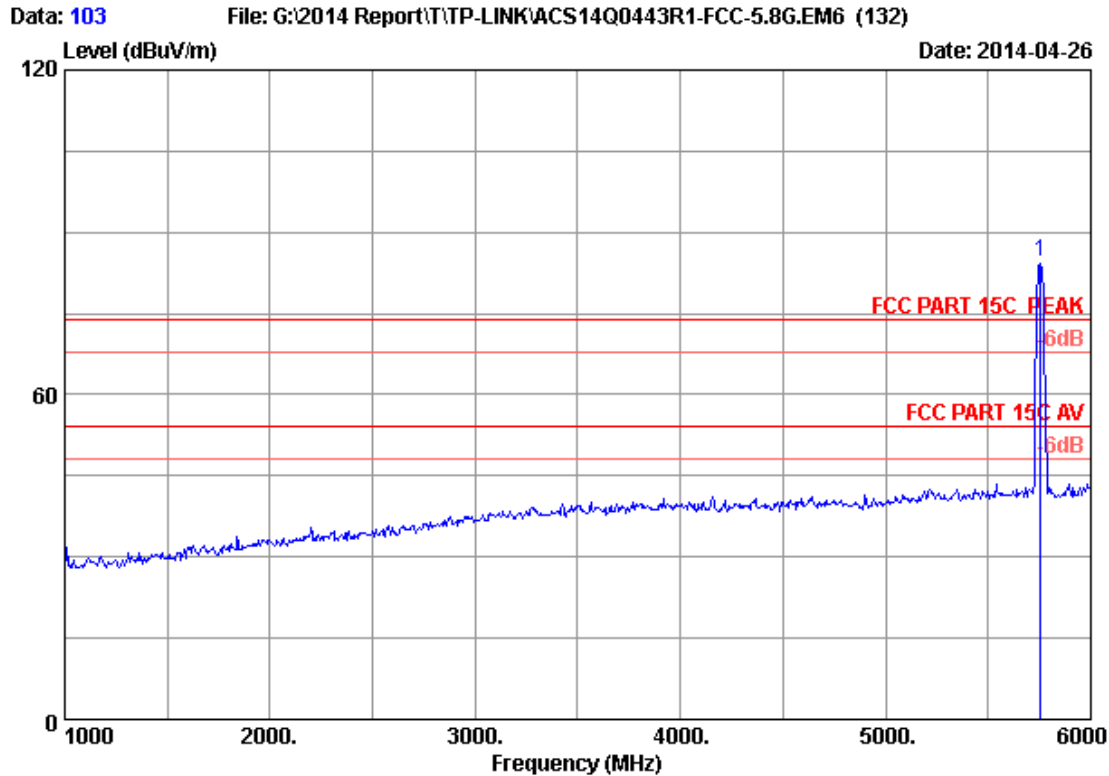

Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	34.10	9.56	35.70	76.47	84.43	74.00	-10.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

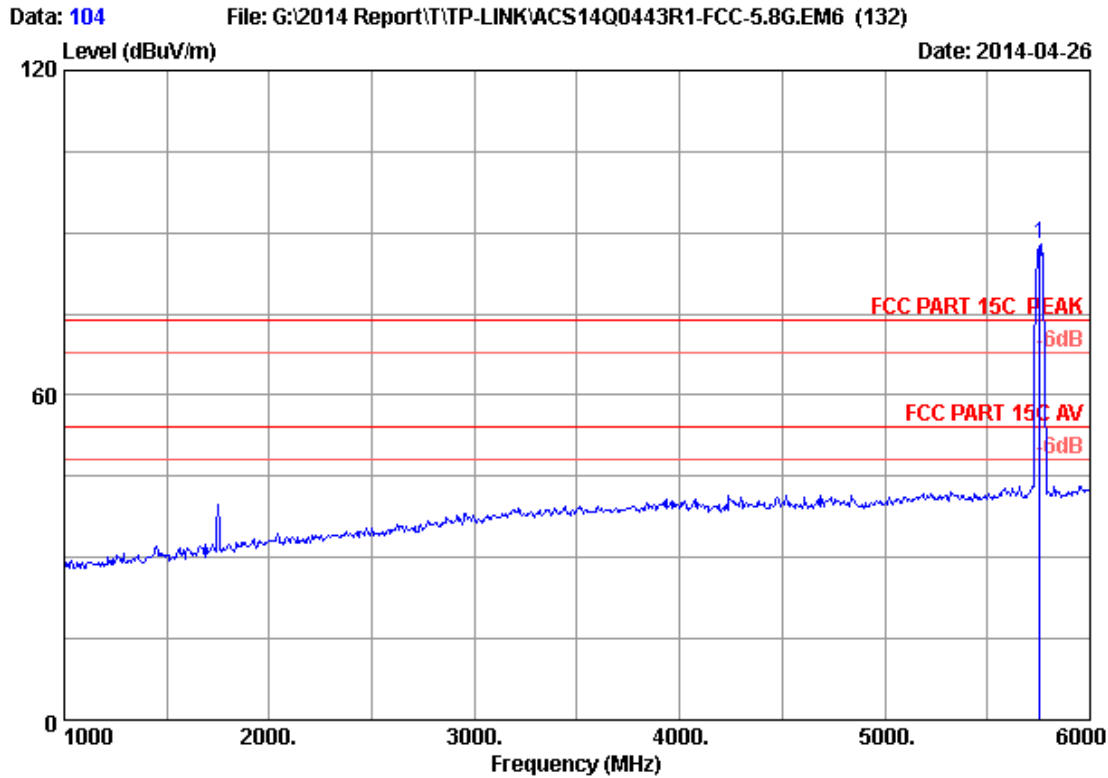

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH151 5755MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	34.10	9.56	35.70	79.86	87.82	74.00	-13.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 113

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)


Date: 2014-04-26

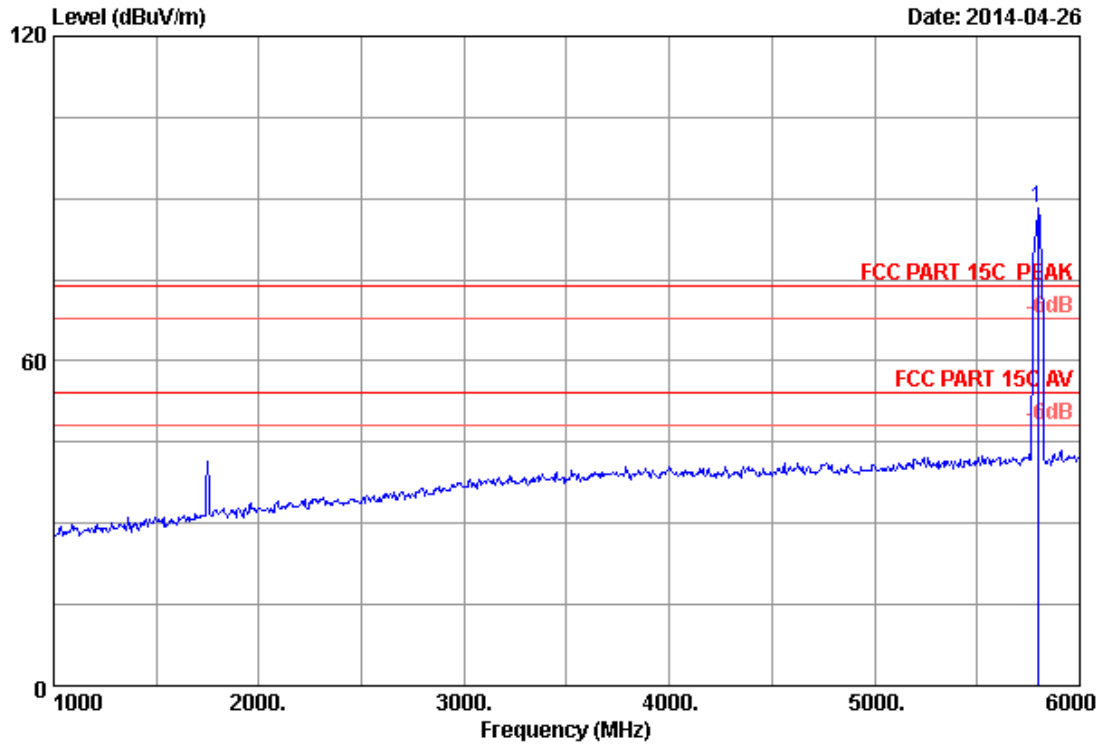

Site no. : 3m Chamber Data no. : 113
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	34.12	9.60	35.70	80.36	88.38	74.00	-14.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

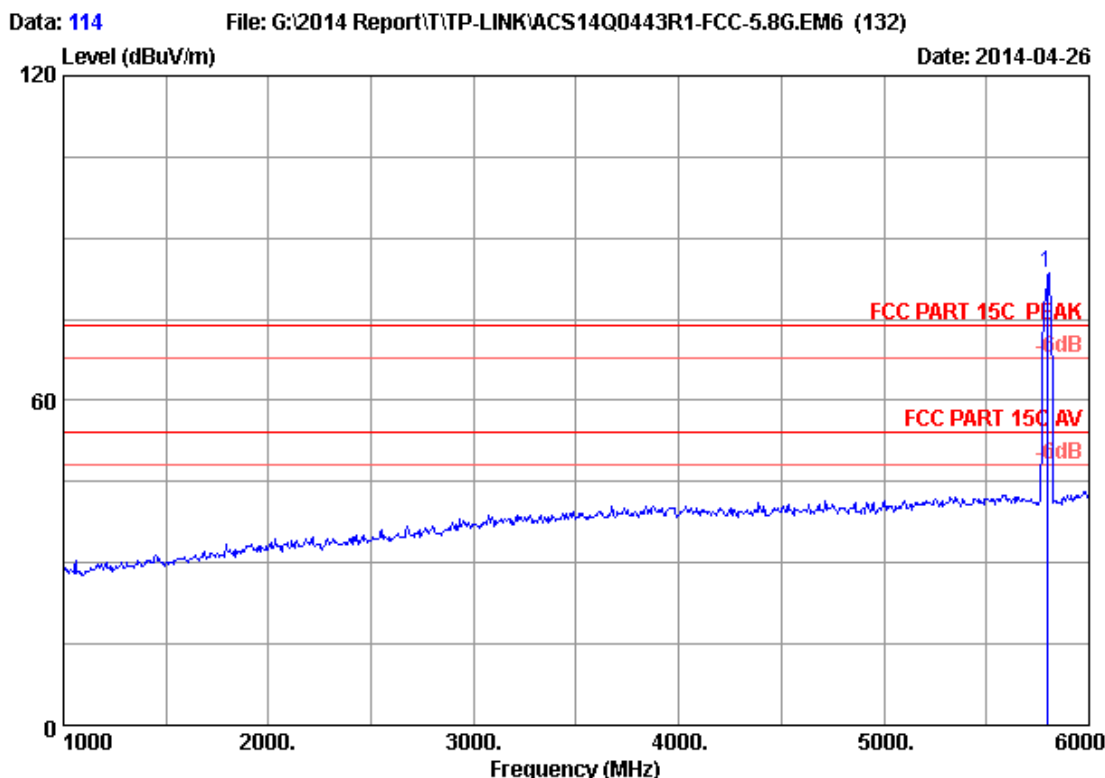

Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant.	Cable	AMP	Emission				
		Factor (dB/m)	Loss (dB)	factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	34.12	9.60	35.70	75.66	83.68	74.00	-9.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 115

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

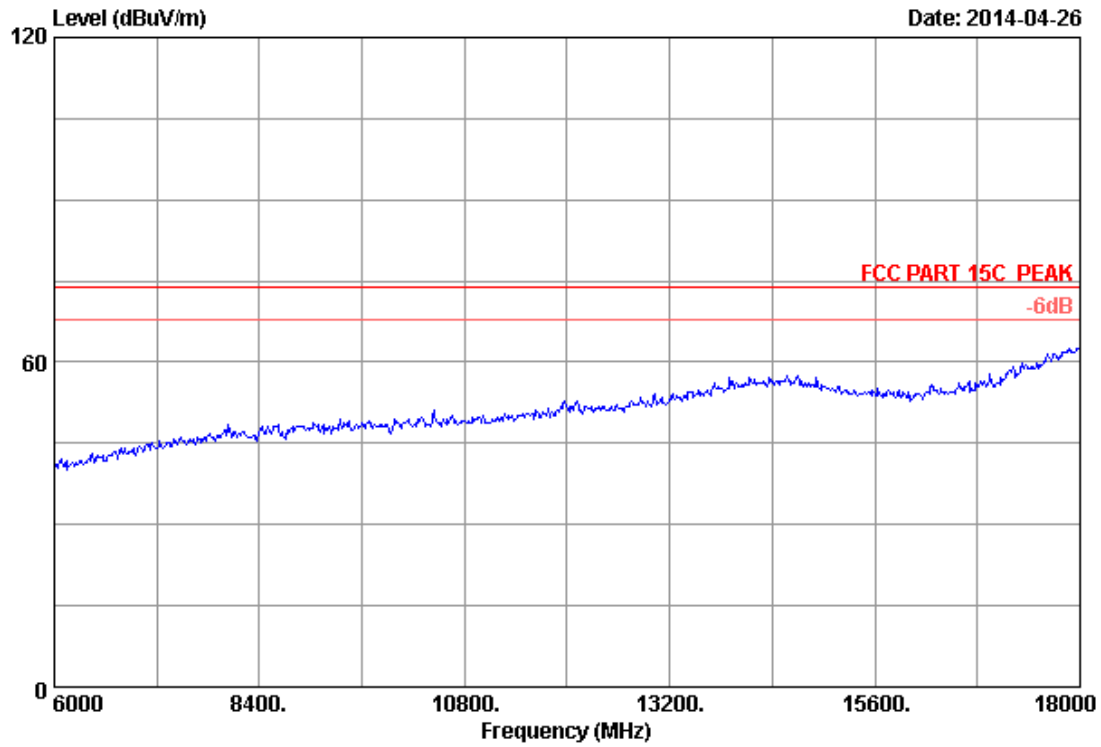

Site no.	: 3m Chamber	Data no.	: 115
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT40 CH159 5795MHz Tx		
M/N	: T2U		

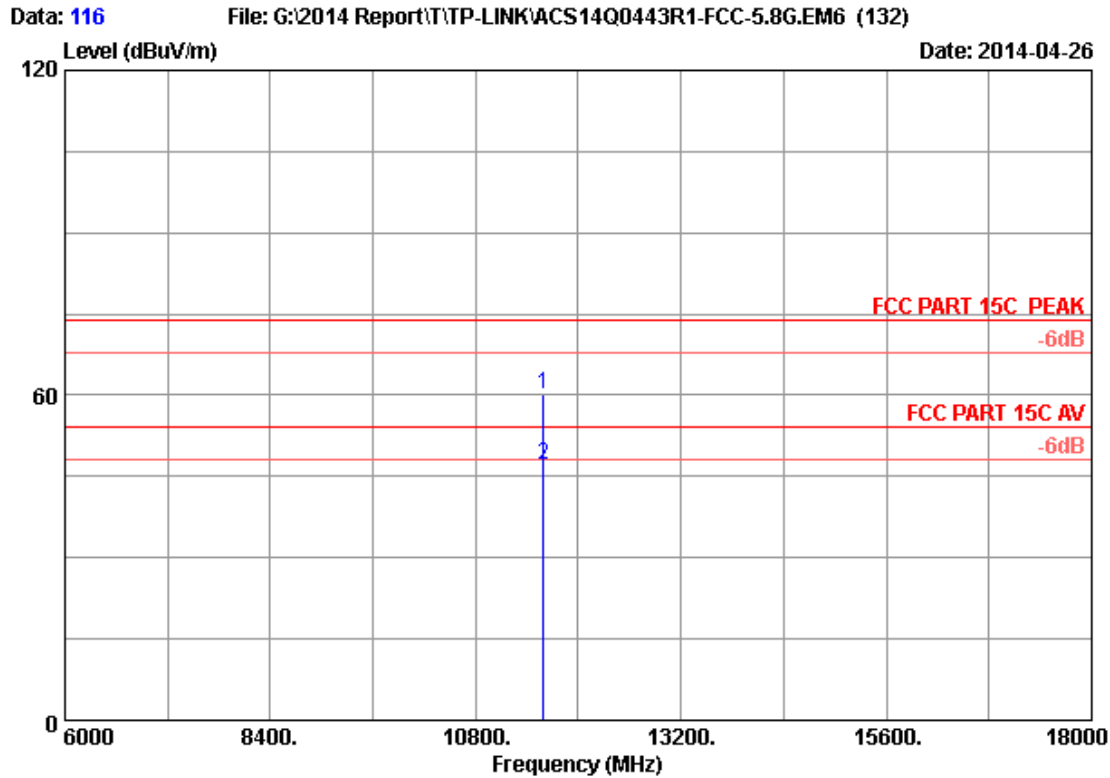

Site no. : 3m Chamber Data no. : 116
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.83	13.34	35.26	43.17	60.08	74.00	13.92	Peak
2	11590.000	38.83	13.34	35.26	30.06	46.97	54.00	7.03	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 117

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

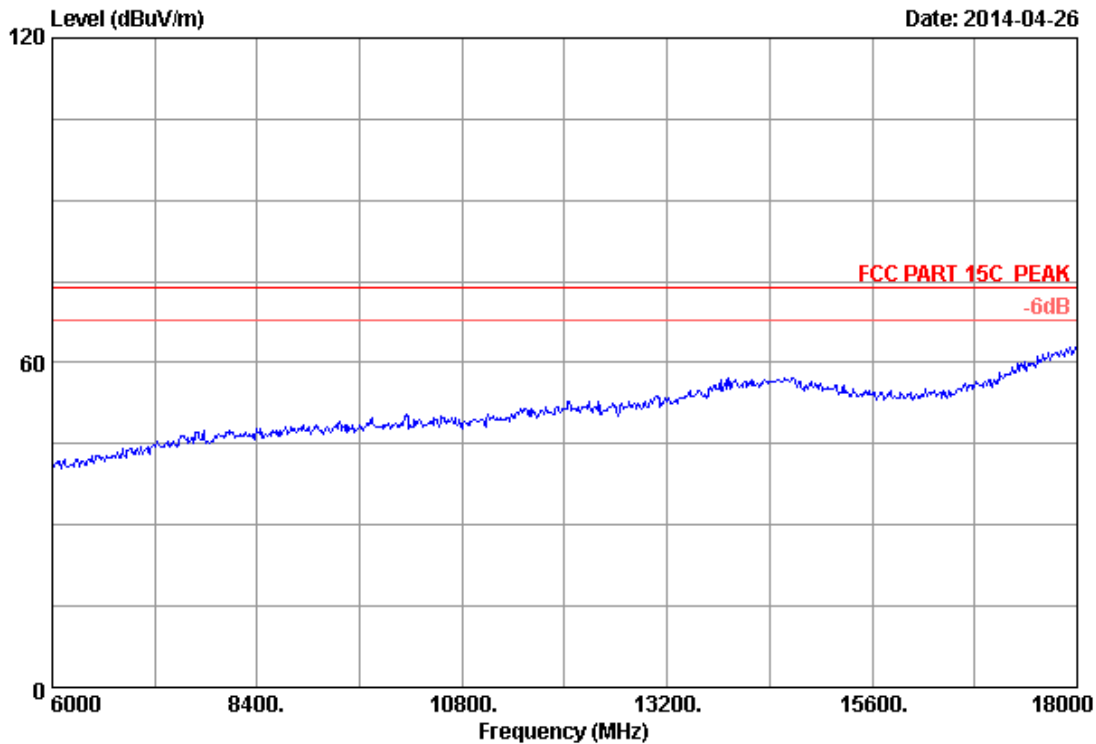


Site no.	: 3m Chamber	Data no.	: 117
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT40 CH159 5795MHz Tx		
M/N	: T2U		

Data: 118

File: G:\2014 Report\T\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

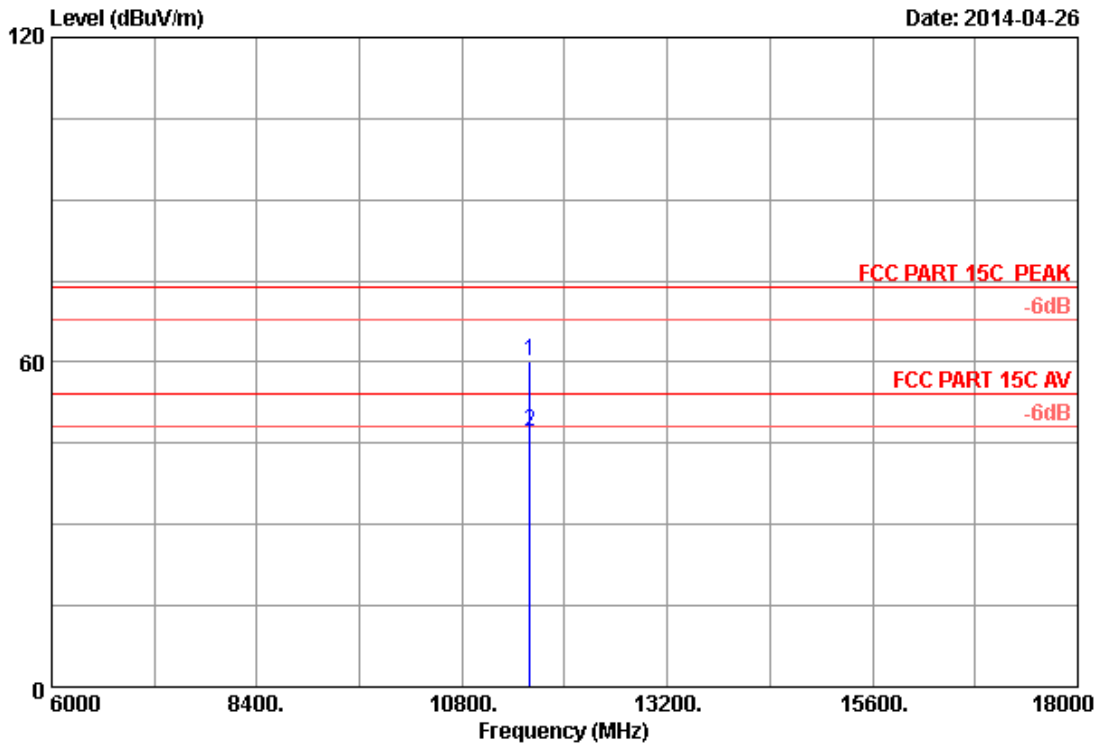

Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 CH159 5795MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.000	38.83	13.34	35.26	43.27	60.18	74.00	13.82	Peak
2	11590.000	38.83	13.34	35.26	30.38	47.29	54.00	6.71	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 119

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

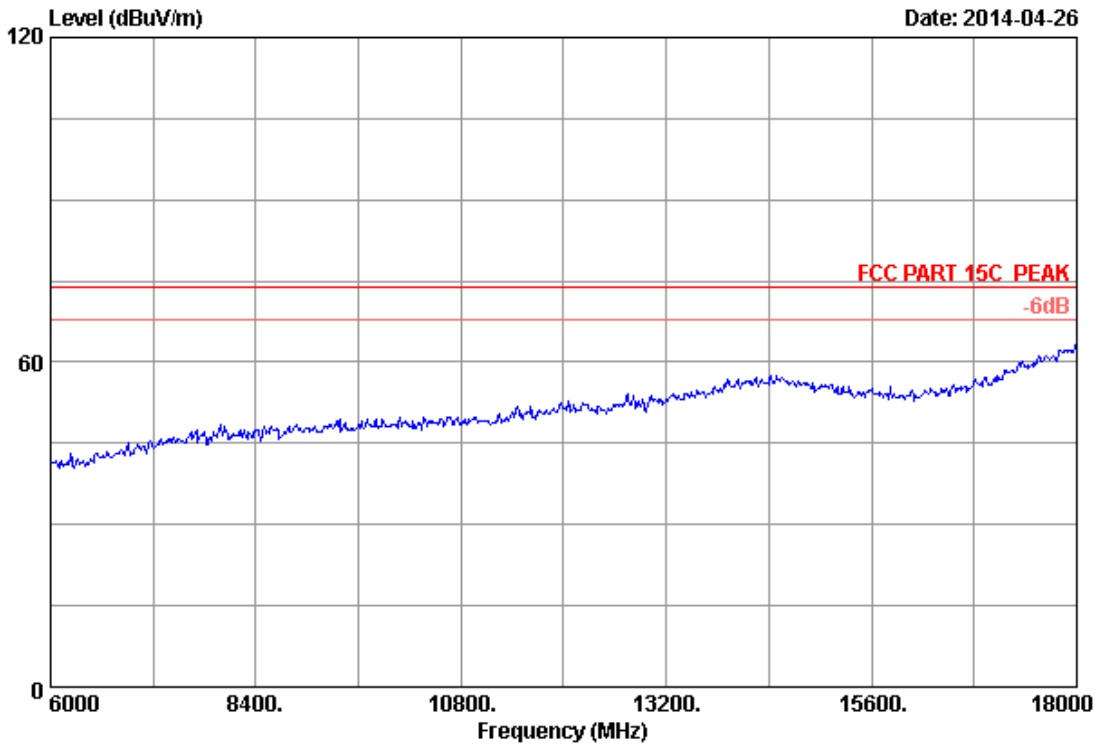

Site no.	: 3m Chamber	Data no.	: 119
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT80 CH155 5775MHz Tx		
M/N	: T2U		

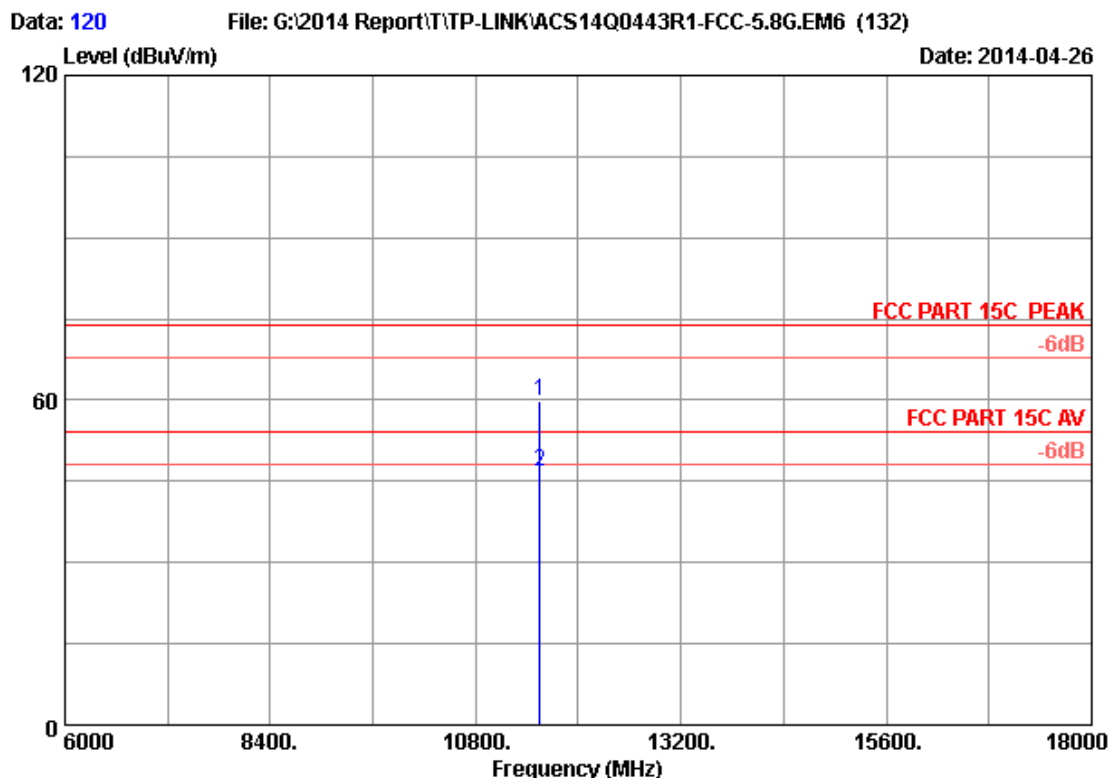

Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : T2U


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.000	38.77	13.31	35.27	42.95	59.76	74.00	14.24	Peak
2	11550.000	38.77	13.31	35.27	30.05	46.86	54.00	7.14	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.


Data: 121

File: G:\2014 Report\TP-LINK\ACS14Q0443R1-FCC-5.8G.EM6 (132)

Date: 2014-04-26

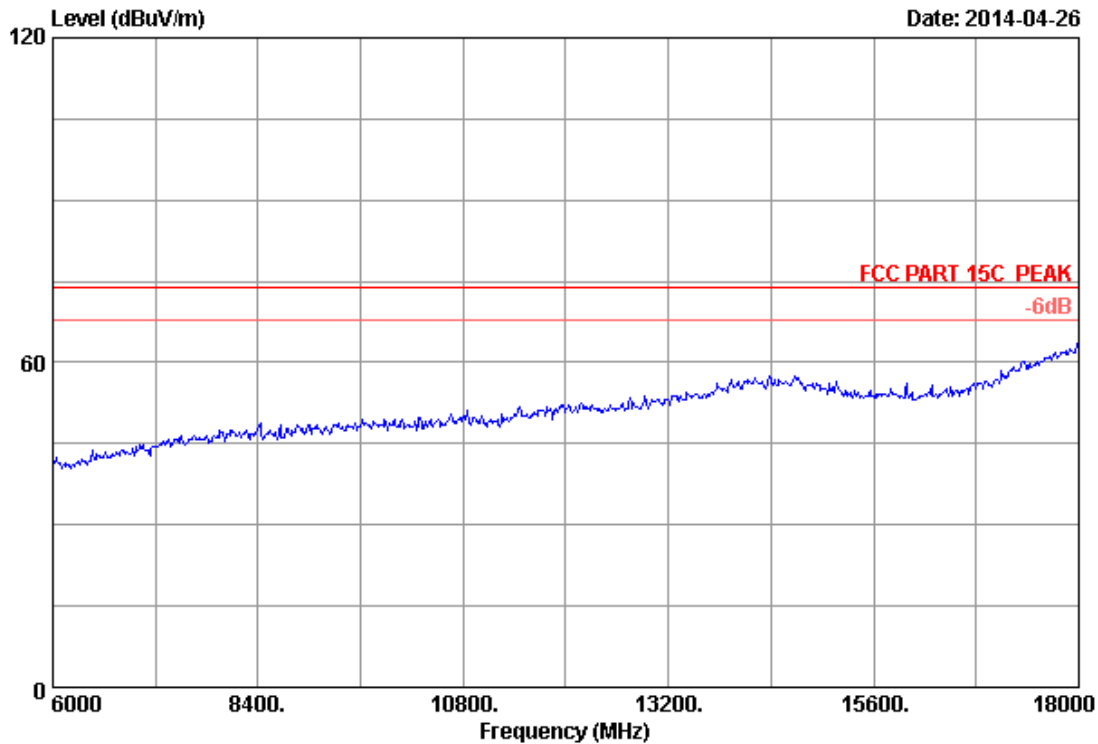


Site no.	: 3m Chamber	Data no.	: 121
Dis. / Ant.	: 3m 2013 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: AC600 Wireless Dual Band USB Adapter		
Power Rating	: DC 5V From PC Input AC 120V/60Hz		
Test Mode	: IEEE802.11ac VHT80 CH155 5775MHz Tx		
M/N	: T2U		

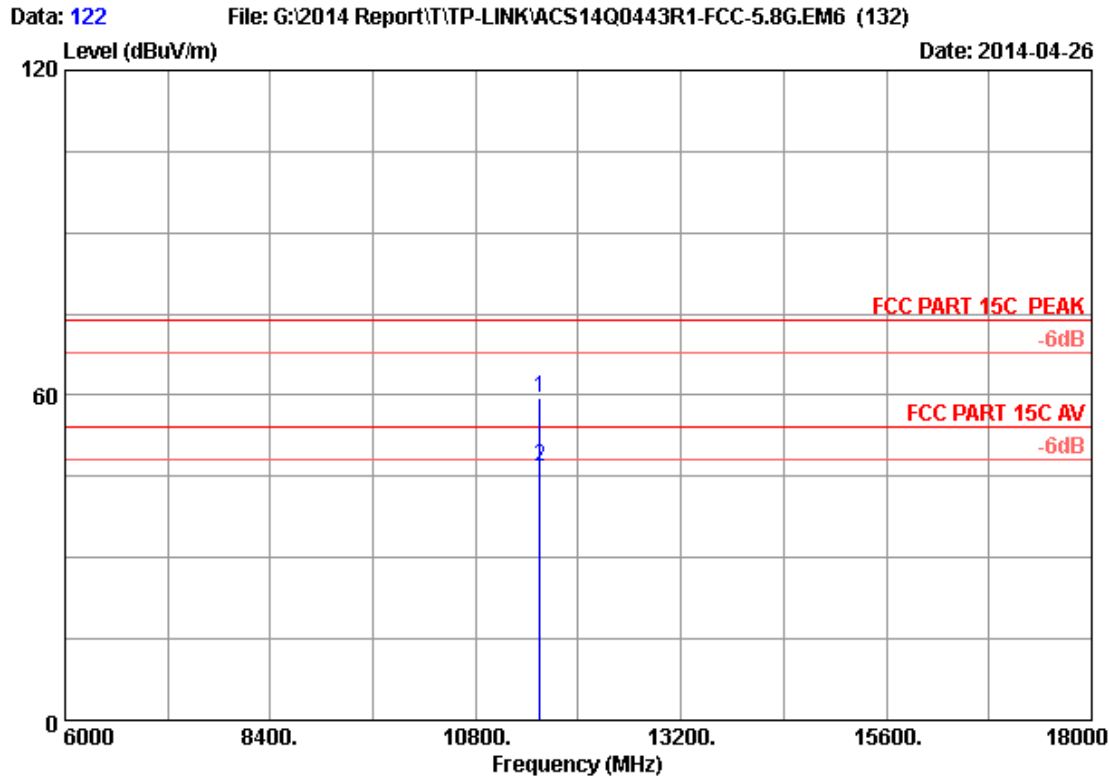

Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.000	38.77	13.31	35.27	42.68	59.49	74.00	14.51	Peak
2	11550.000	38.77	13.31	35.27	29.85	46.66	54.00	7.34	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

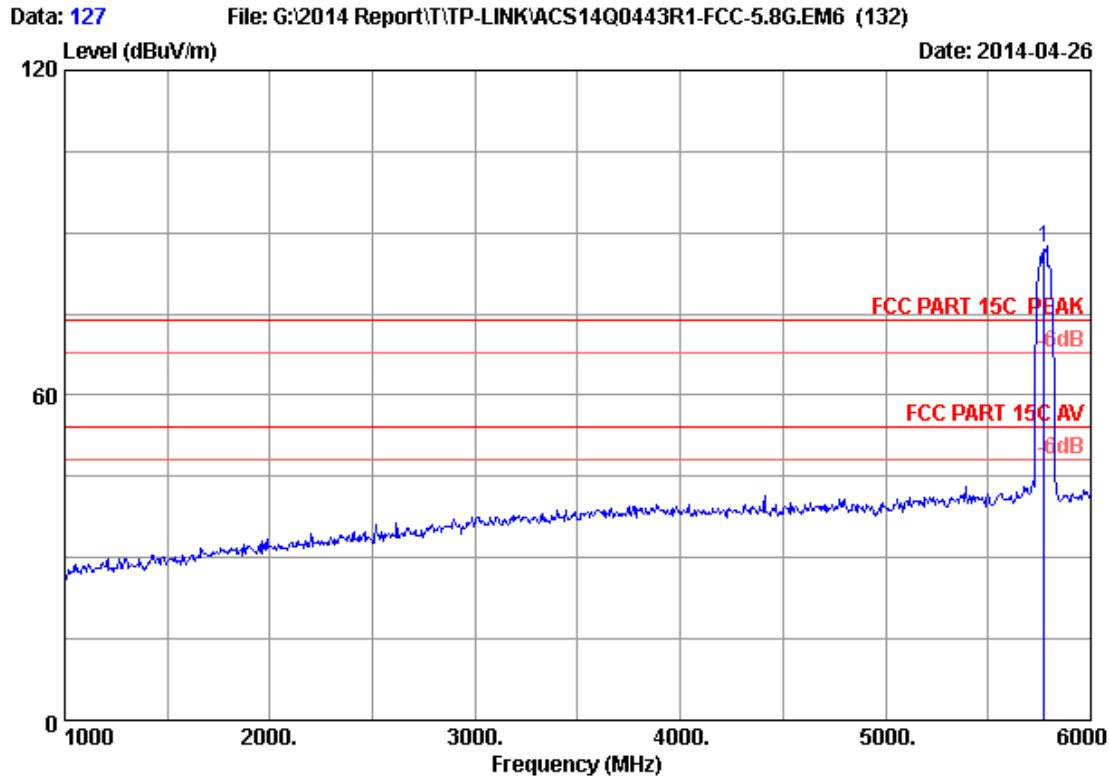

Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.000	34.11	9.58	35.70	79.36	87.35	74.00	-13.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

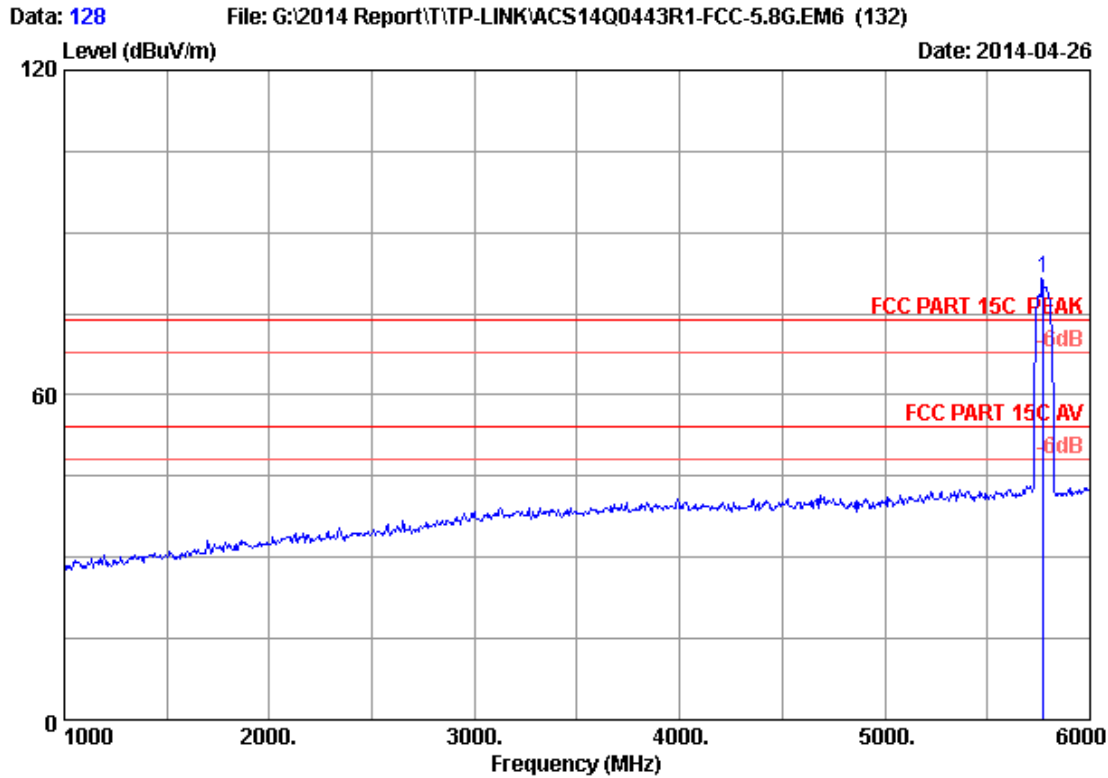

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 2013 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 24°C/56% Engineer : Leo-Li
 EUT : AC600 Wireless Dual Band USB Adapter
 Power Rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx
 M/N : T2U

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.000	34.11	9.58	35.70	73.54	81.53	74.00	-7.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,13	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,13	1 Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions detected.



5.4. Test result



PASS (The testing data was attached in the next pages.)

2.4G:



Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

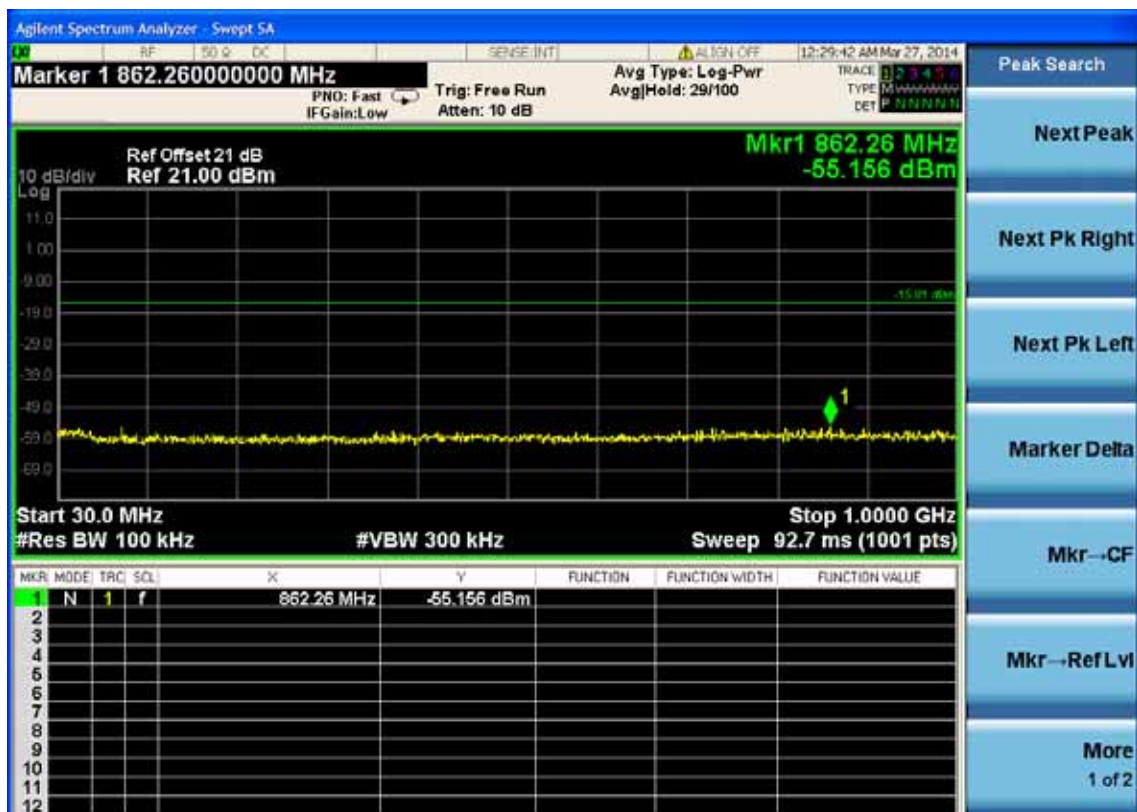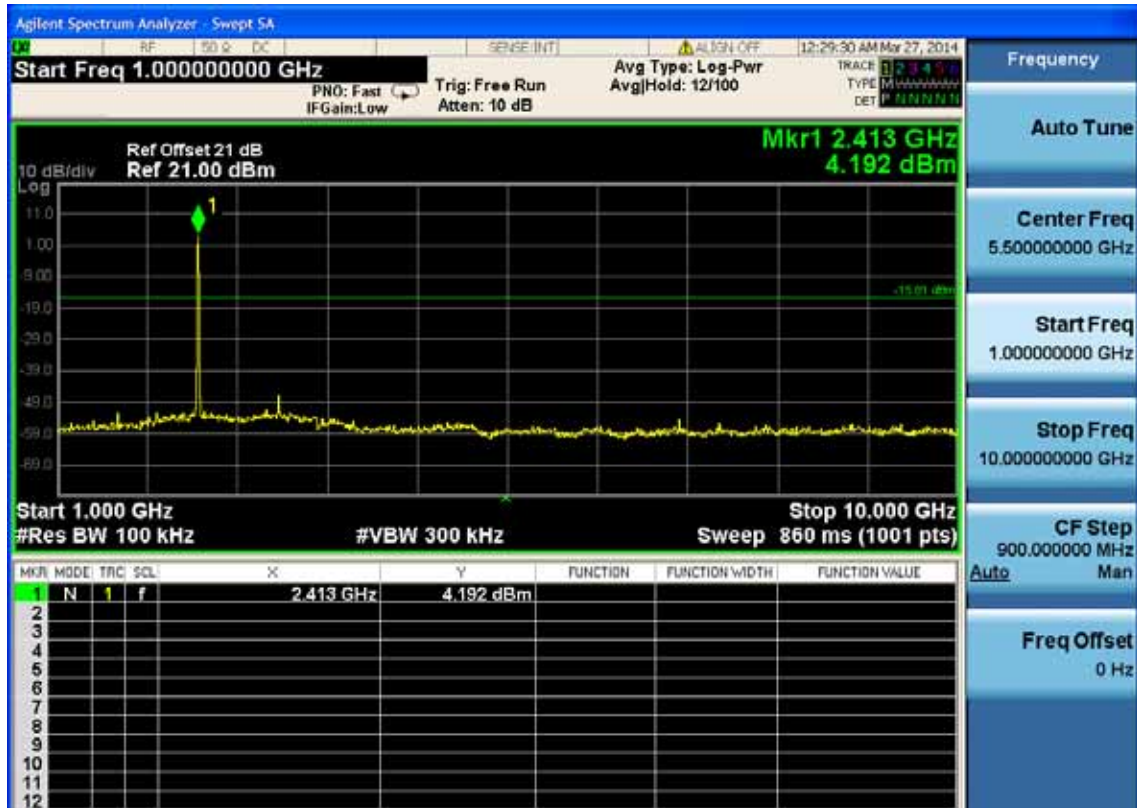

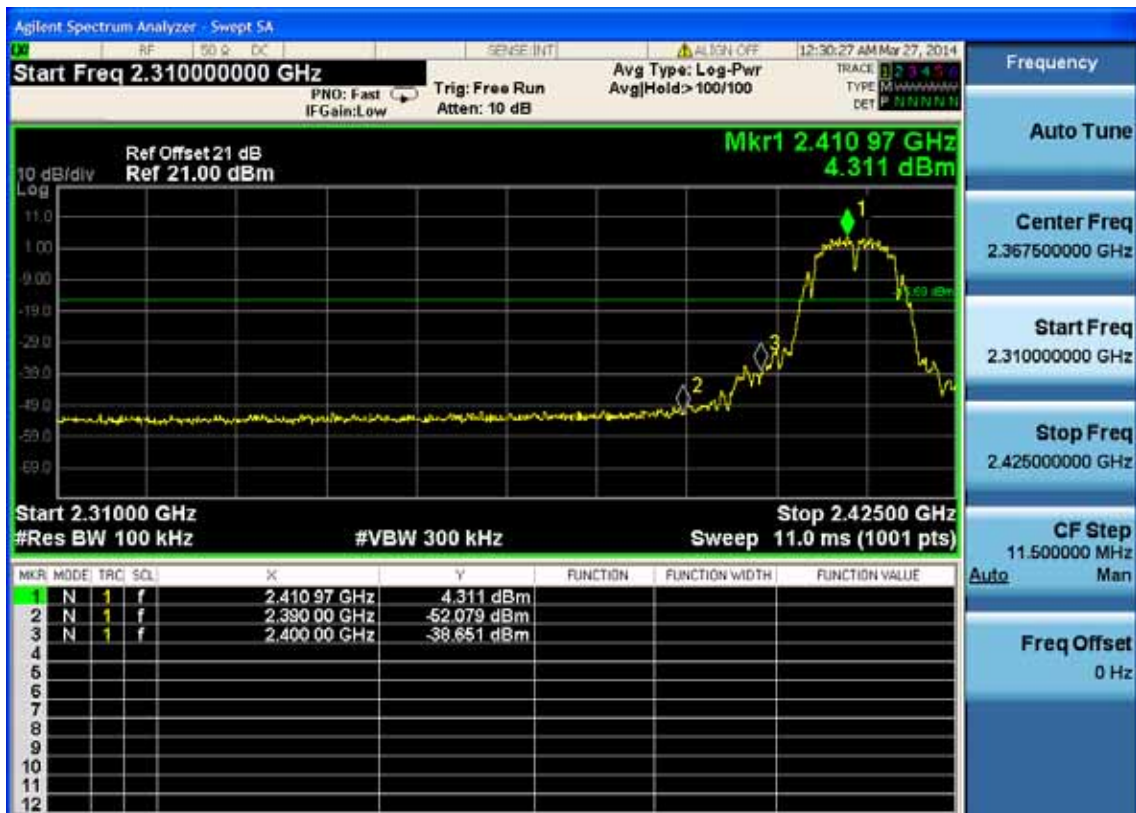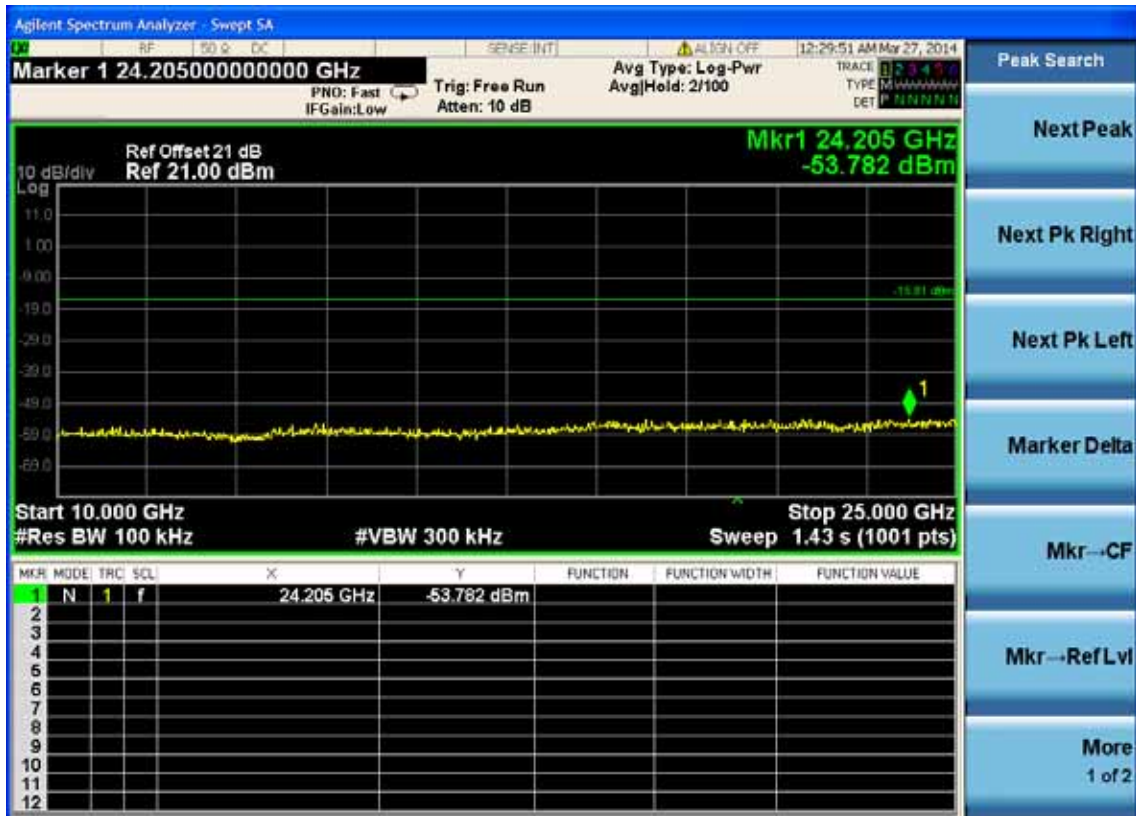



Test CH6: 2437MHz

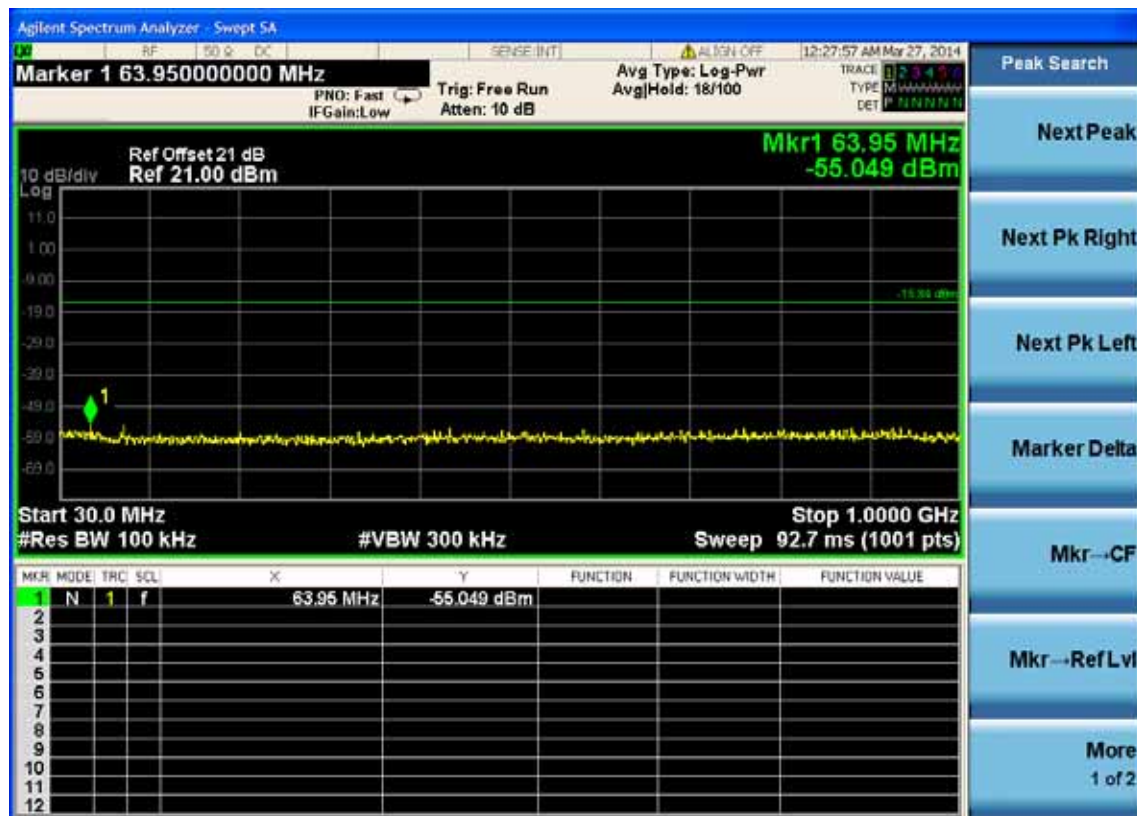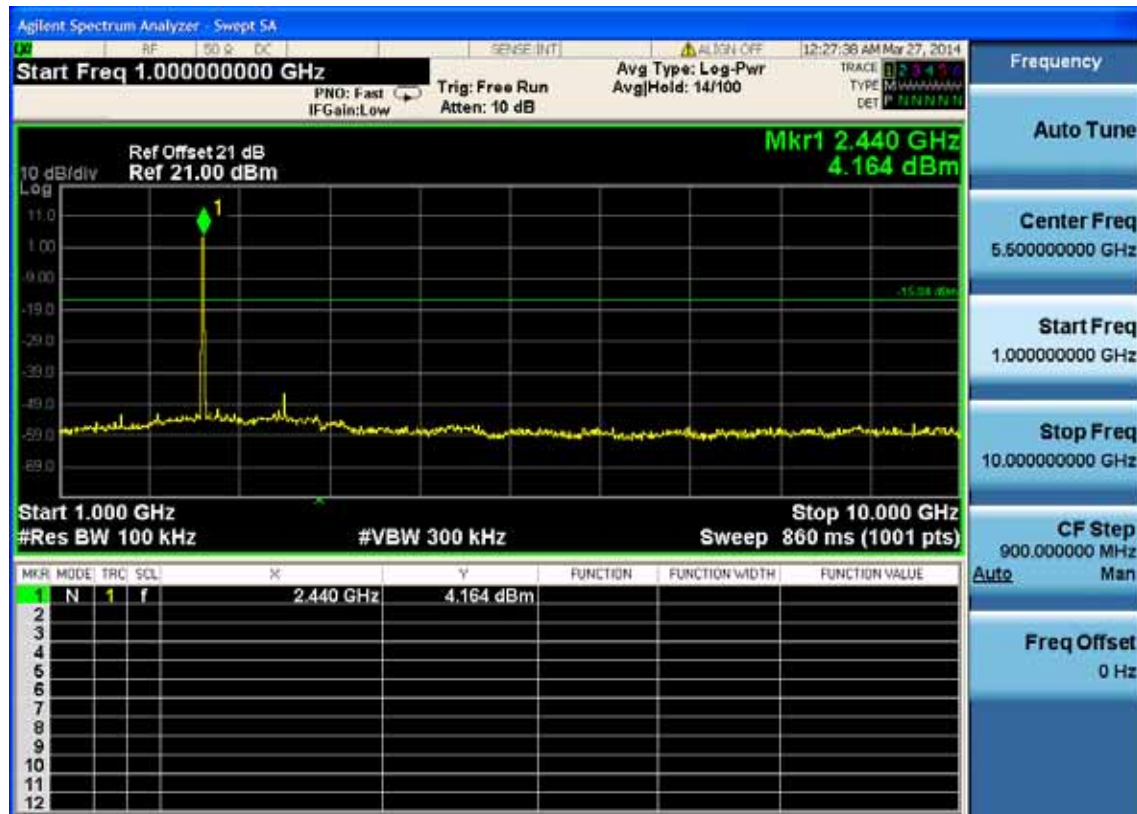


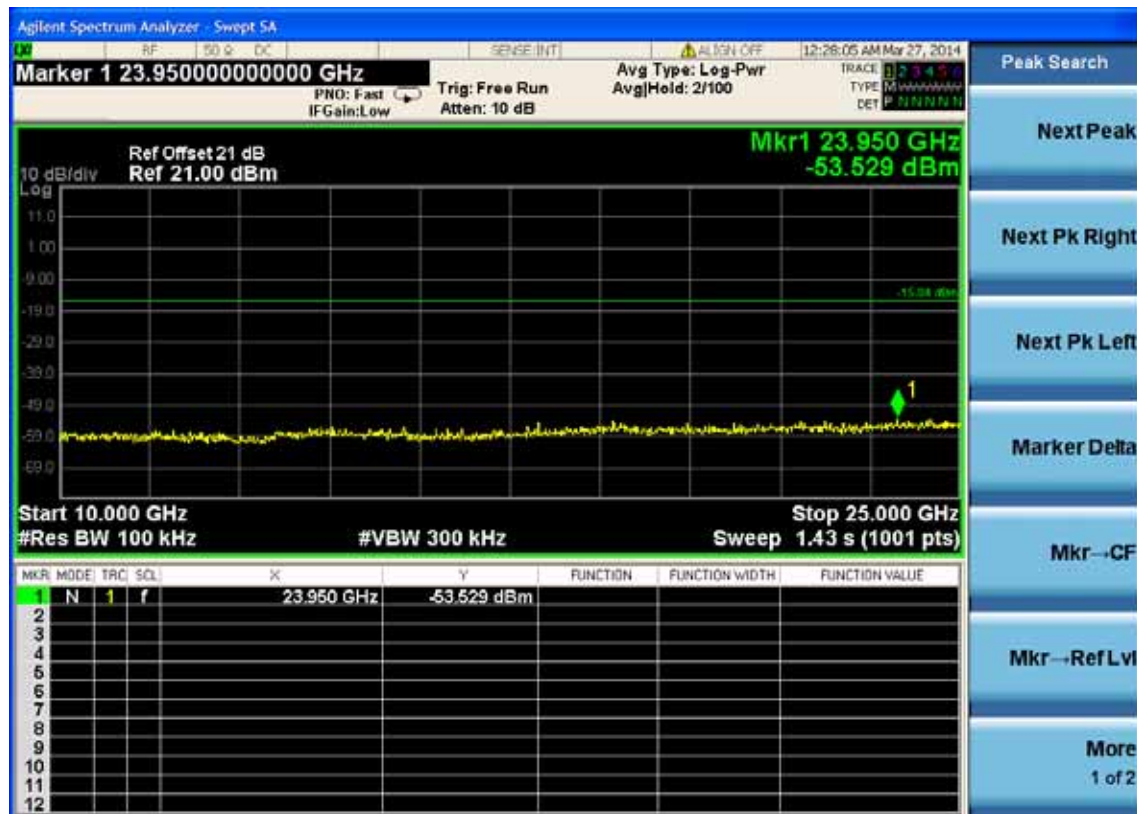

Test CH11: 2462MHz





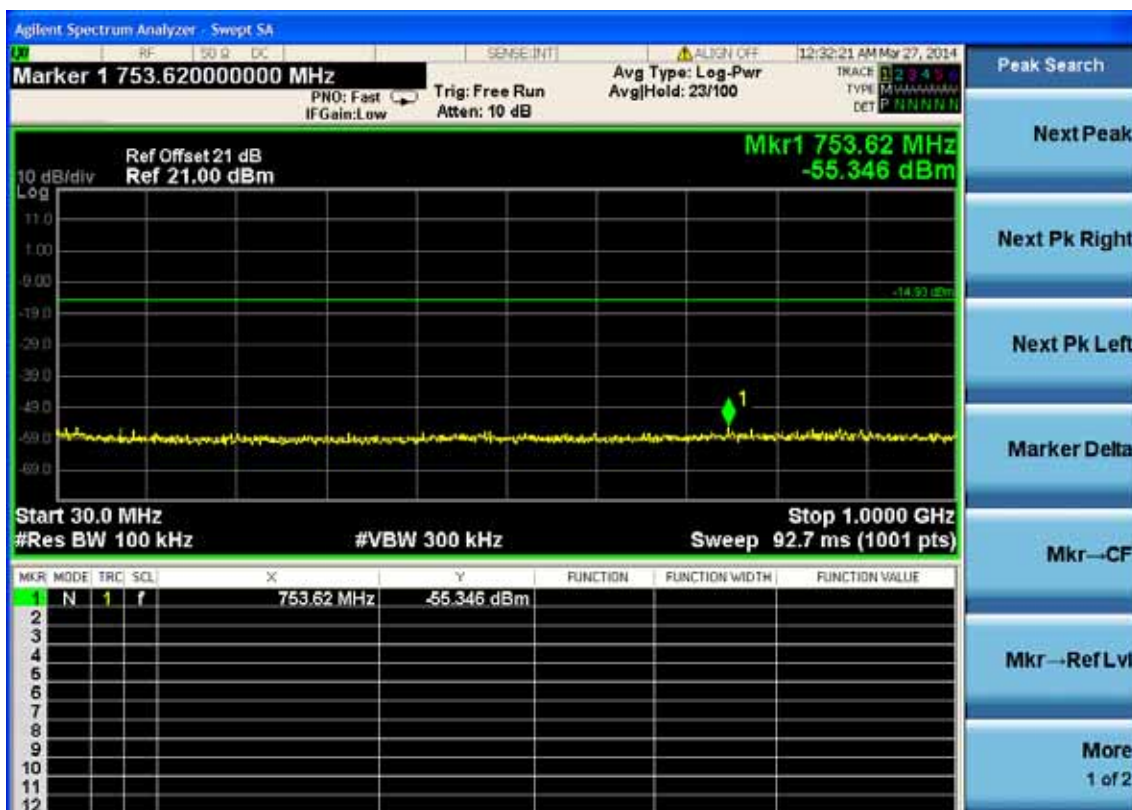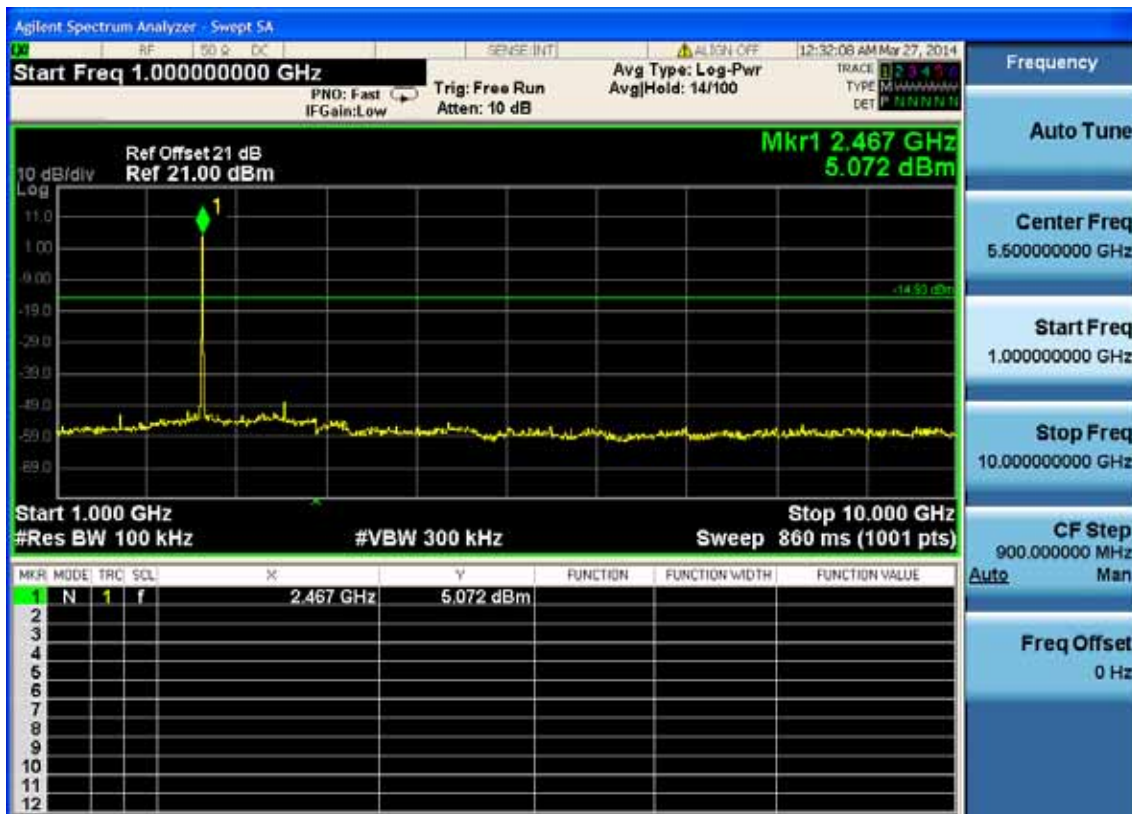


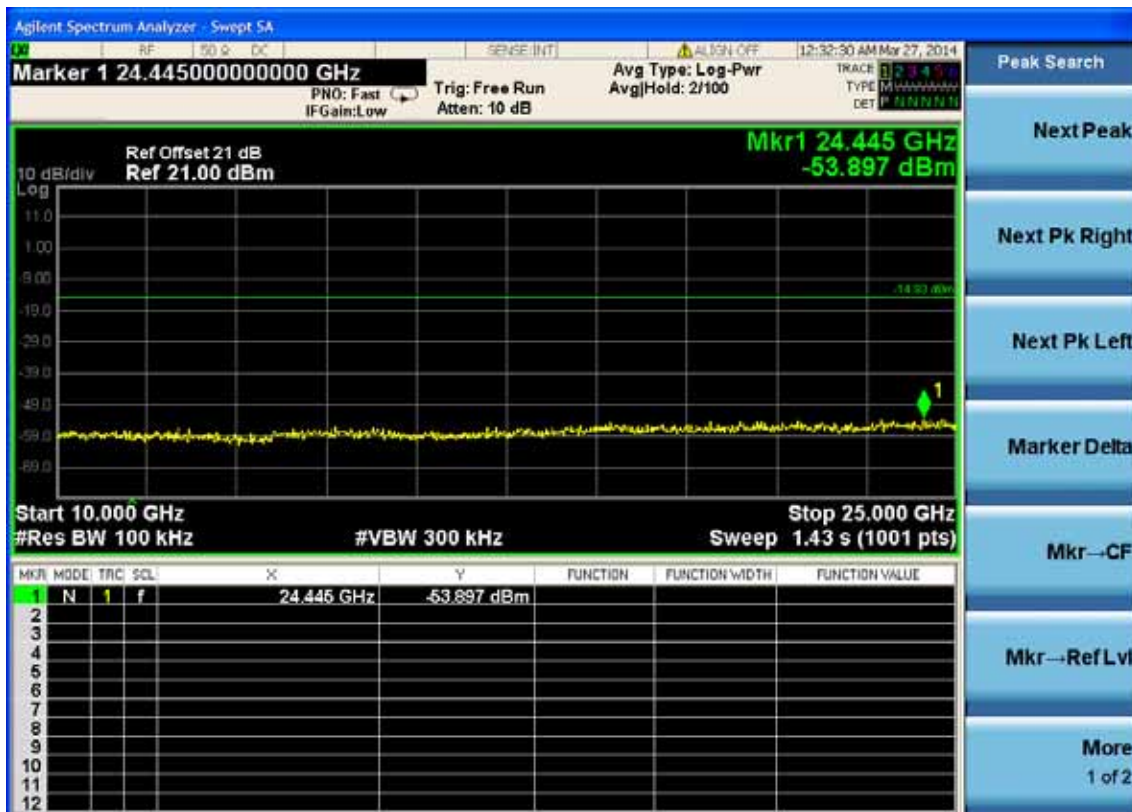


Test Mode: IEEE 802.11g TX
Test CH1: 2412MHz





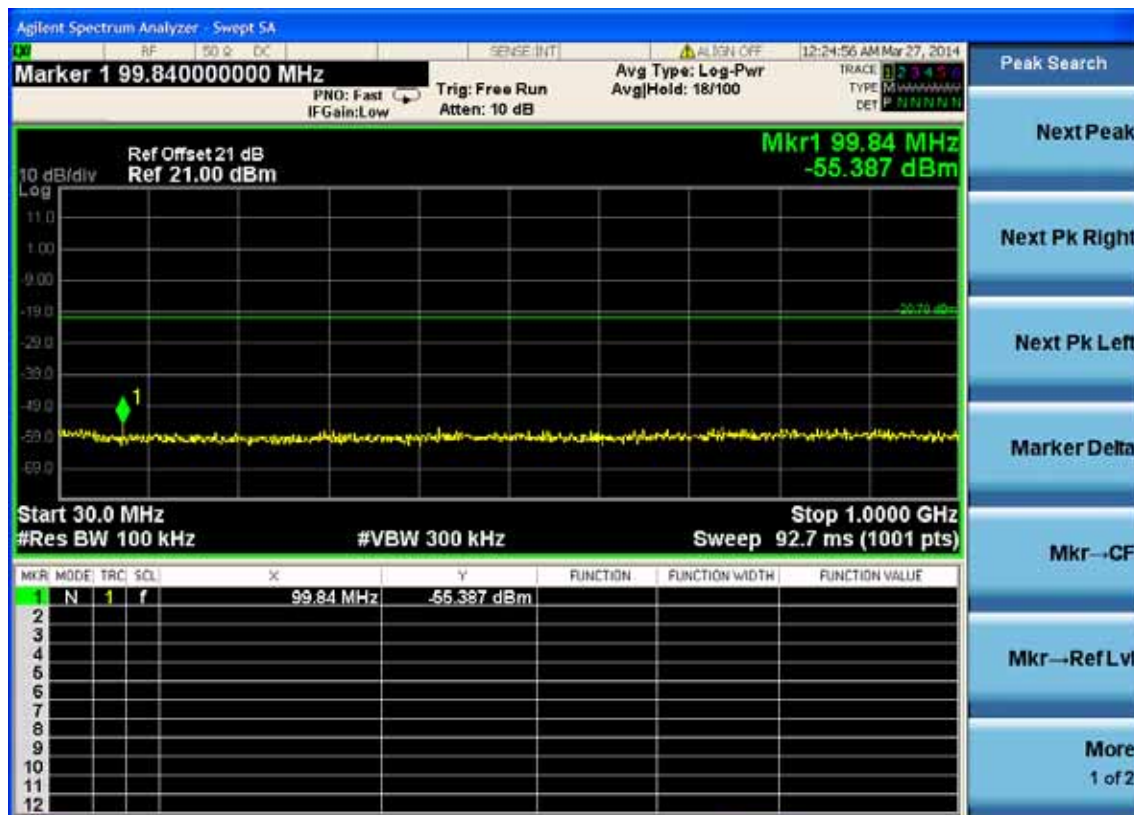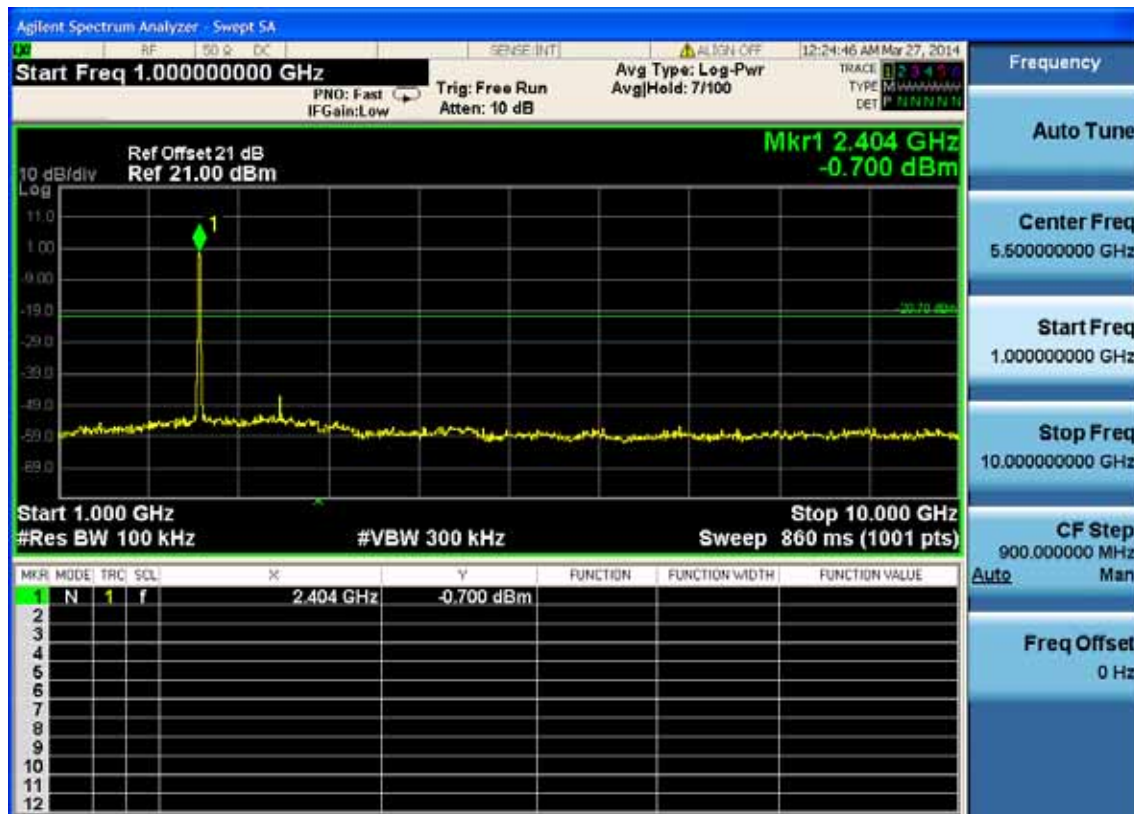


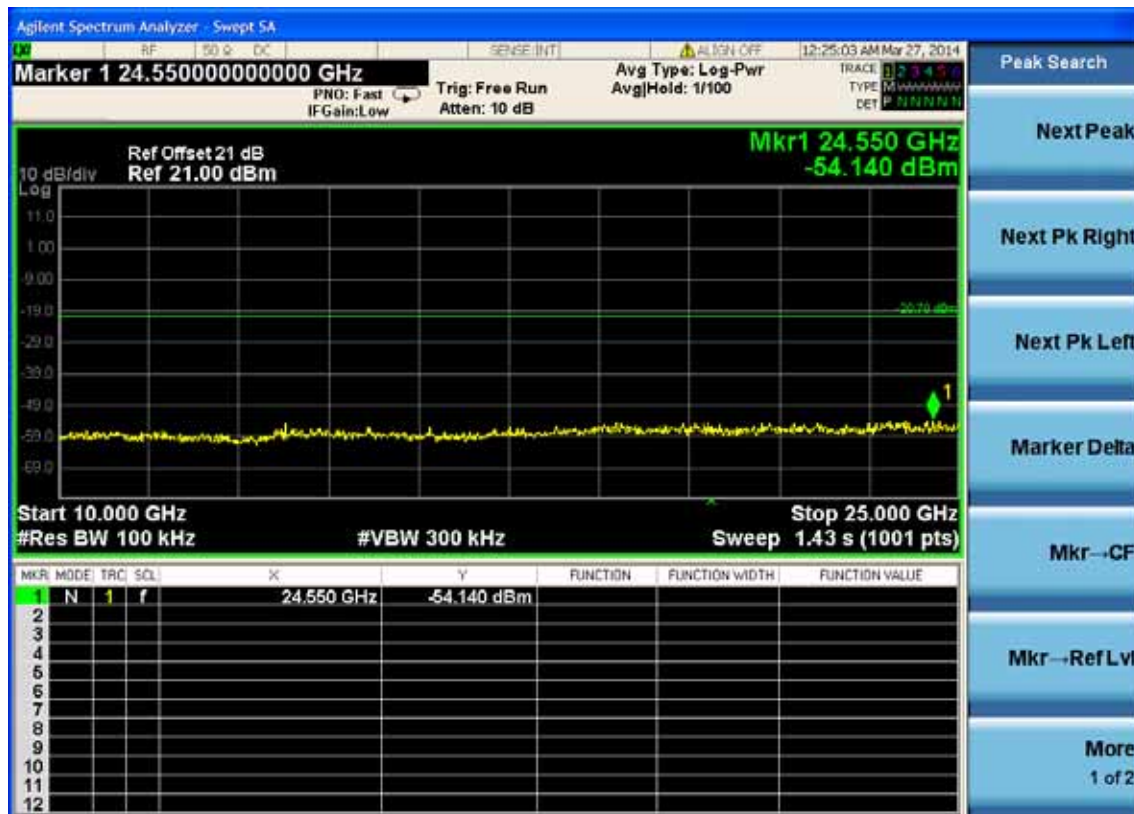



Test CH6: 2437MHz

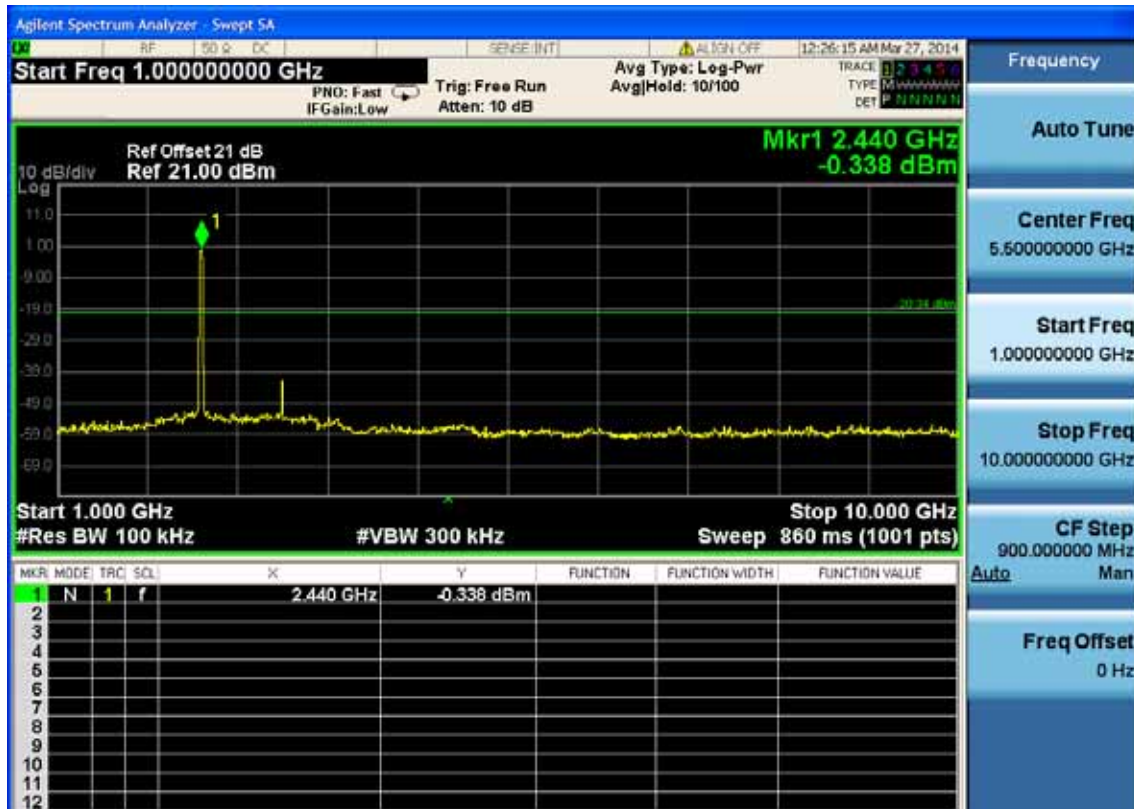

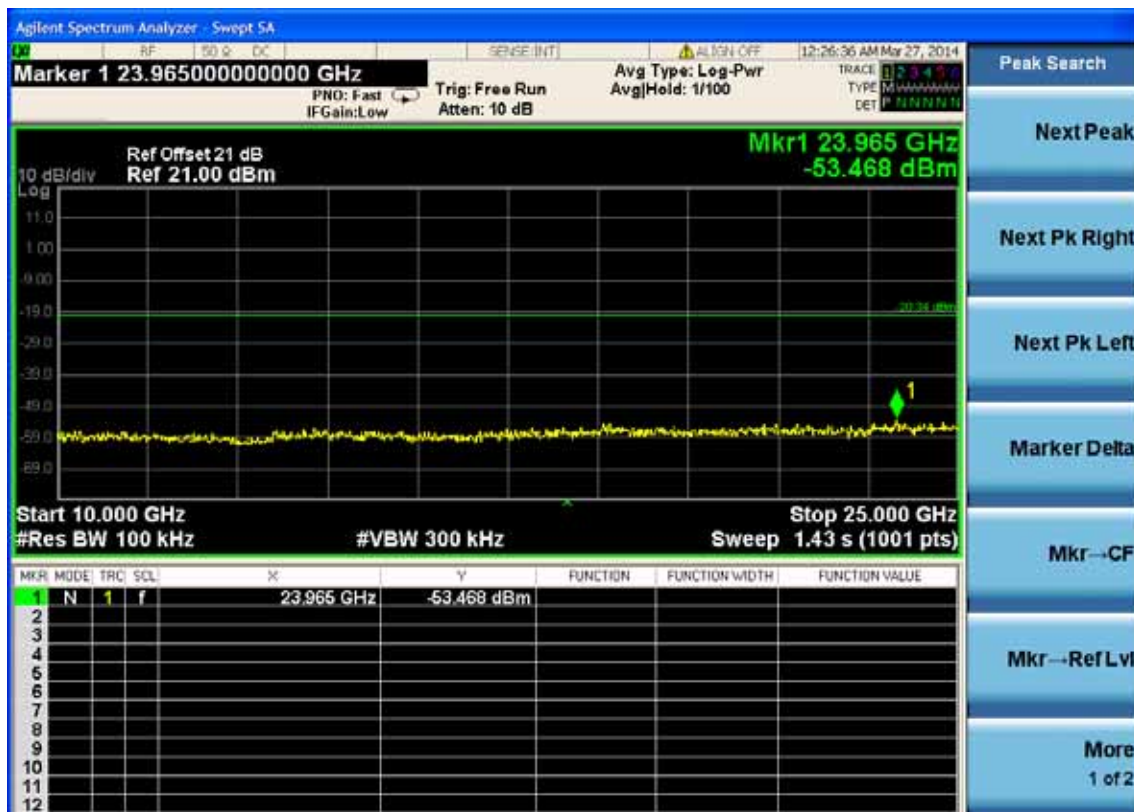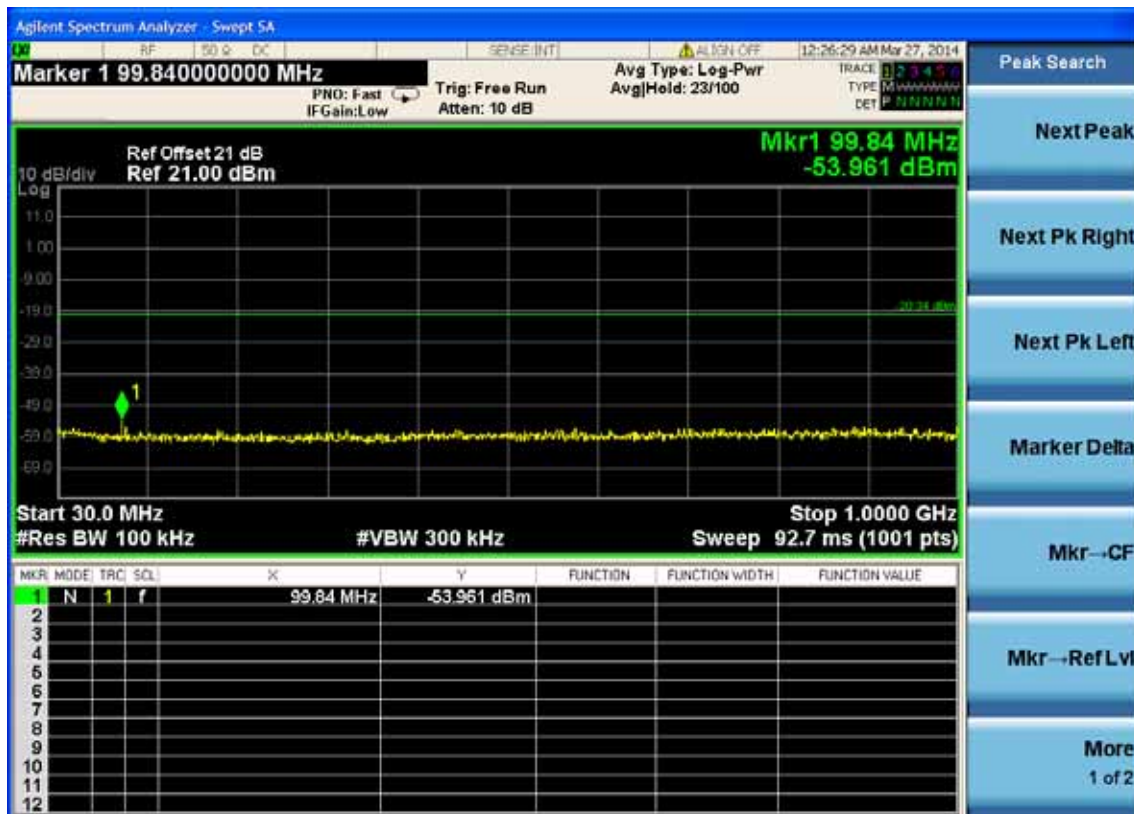



Test CH11: 2462MHz

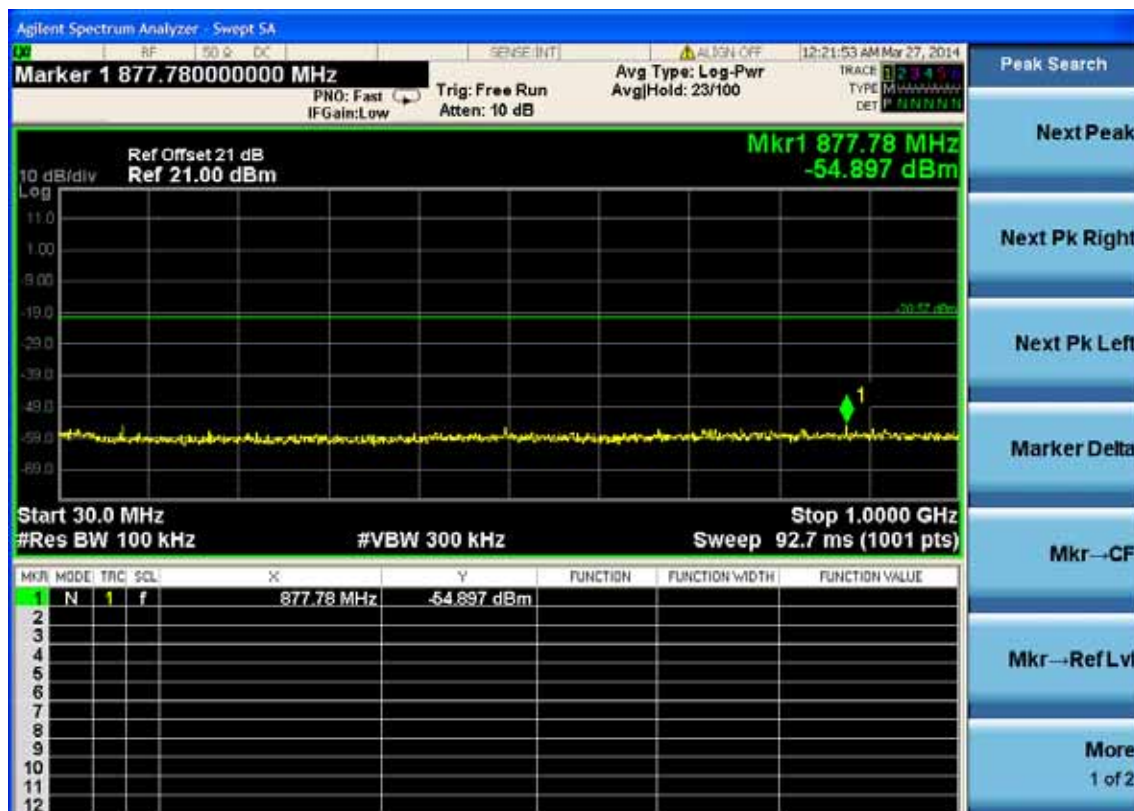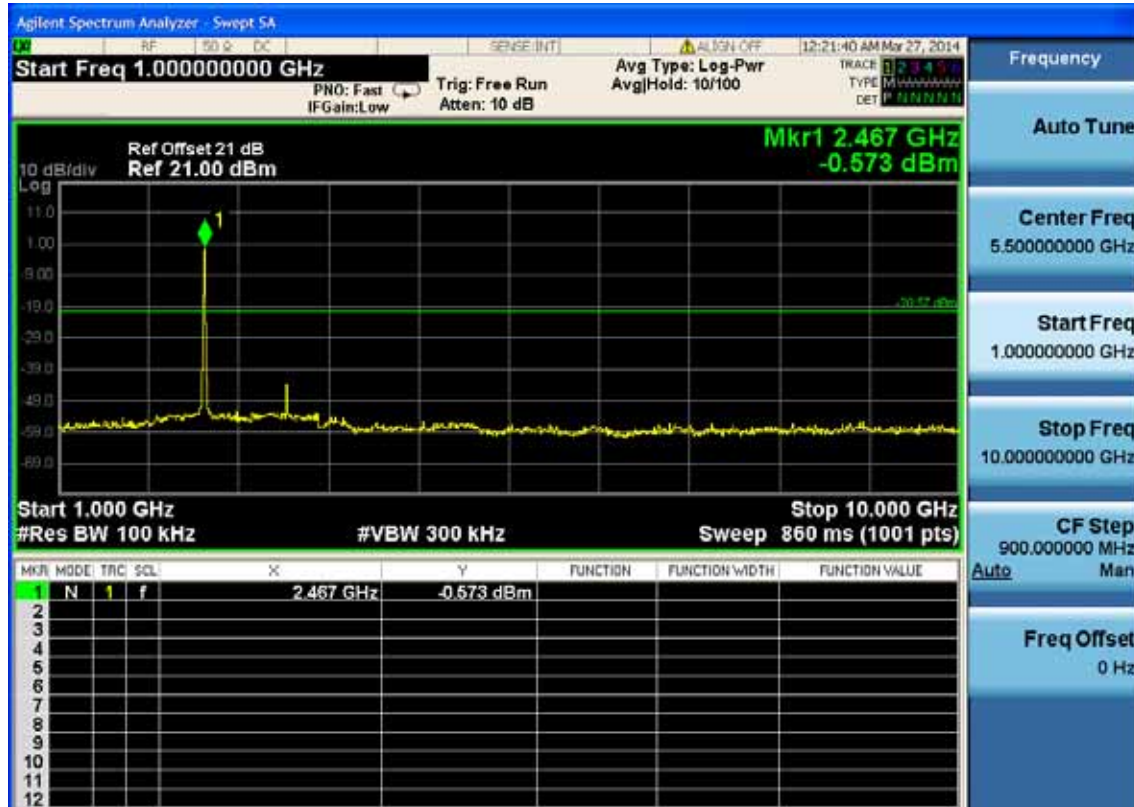


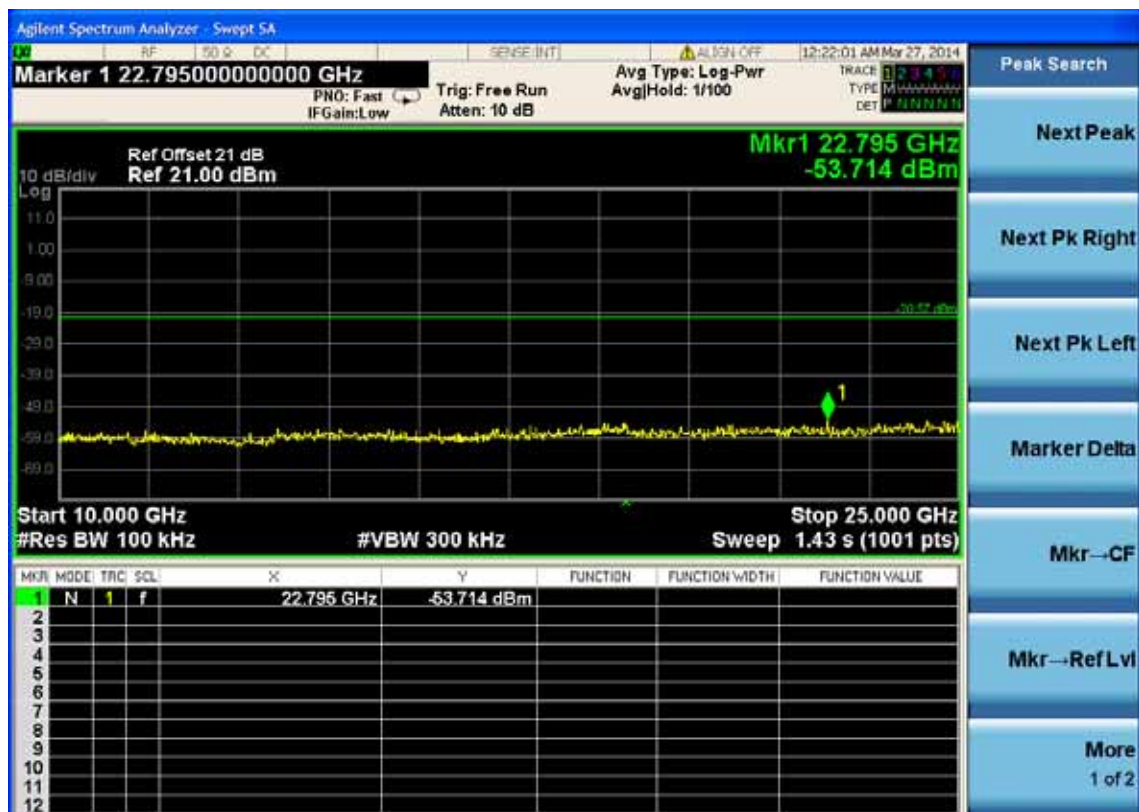



Test Mode: IEEE 802.11n HT20 TX


Test CH1: 2412MHz

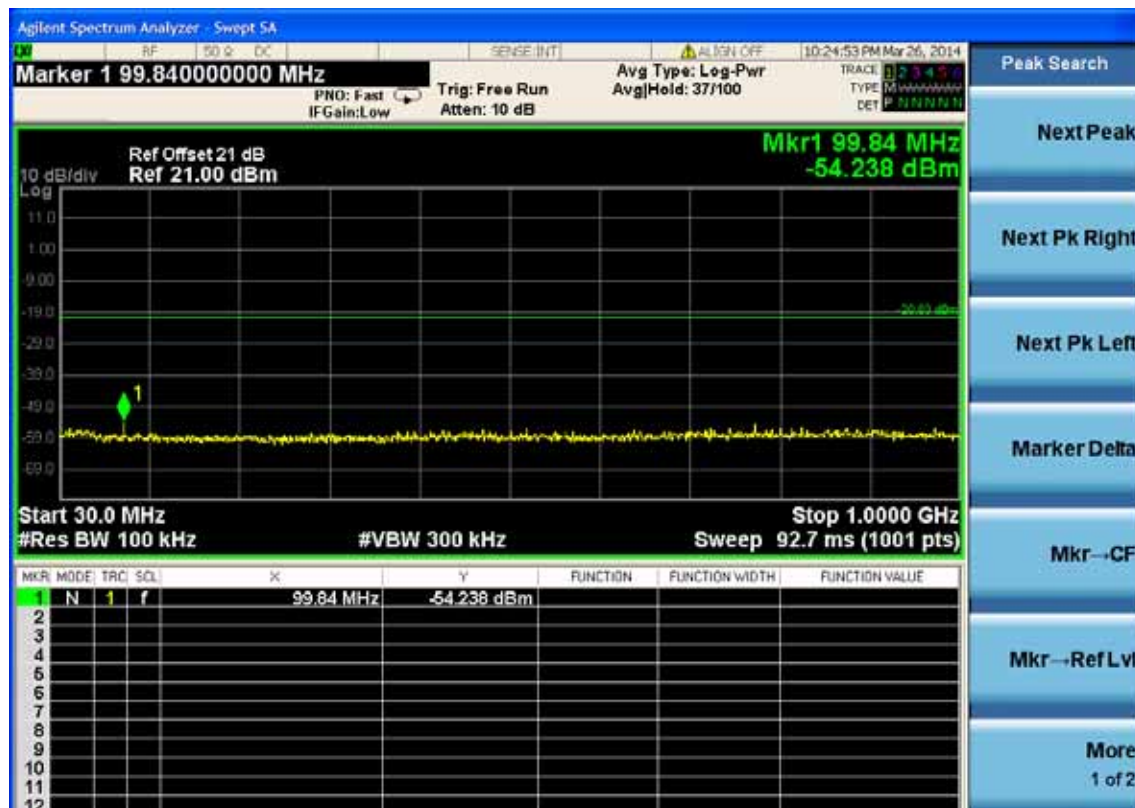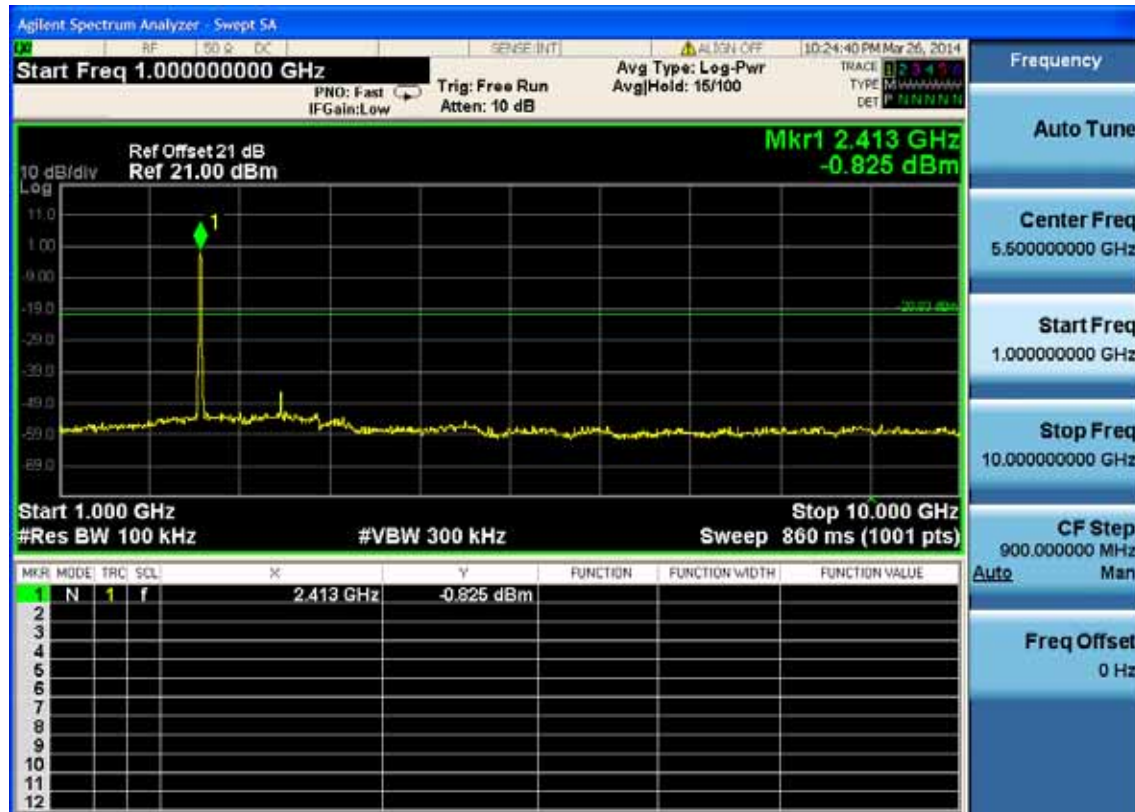

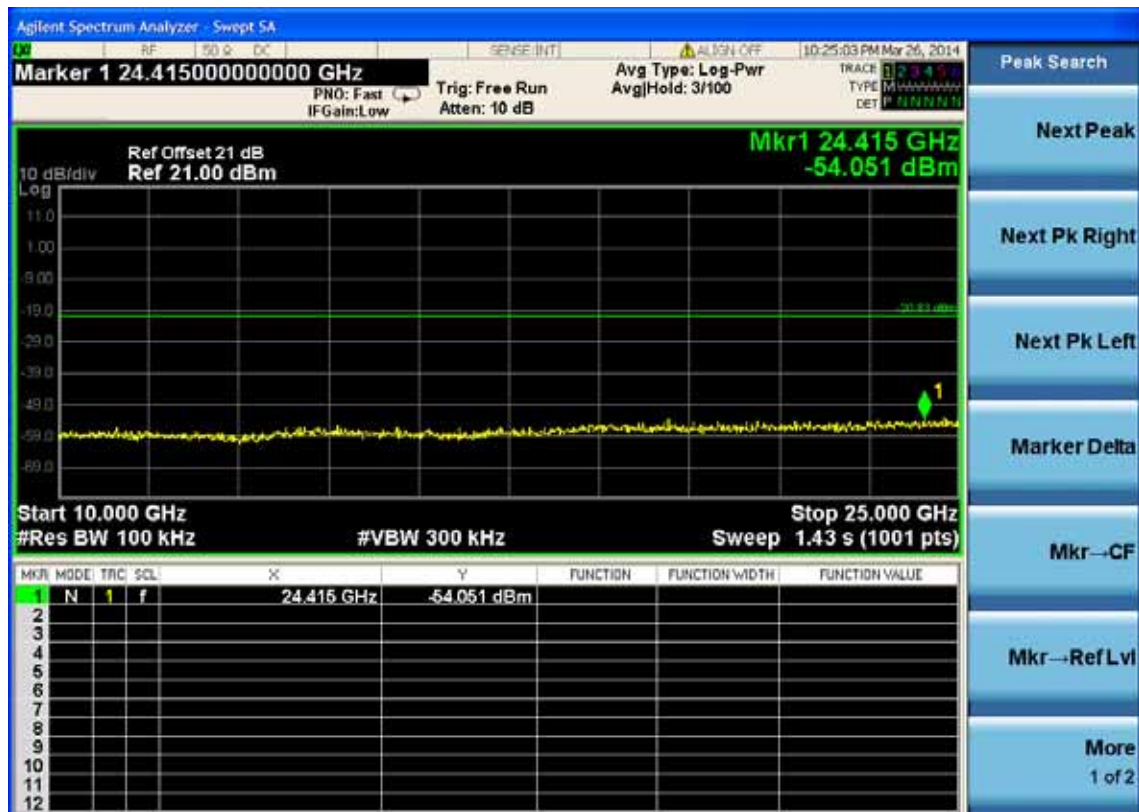



Test CH6: 2437MHz

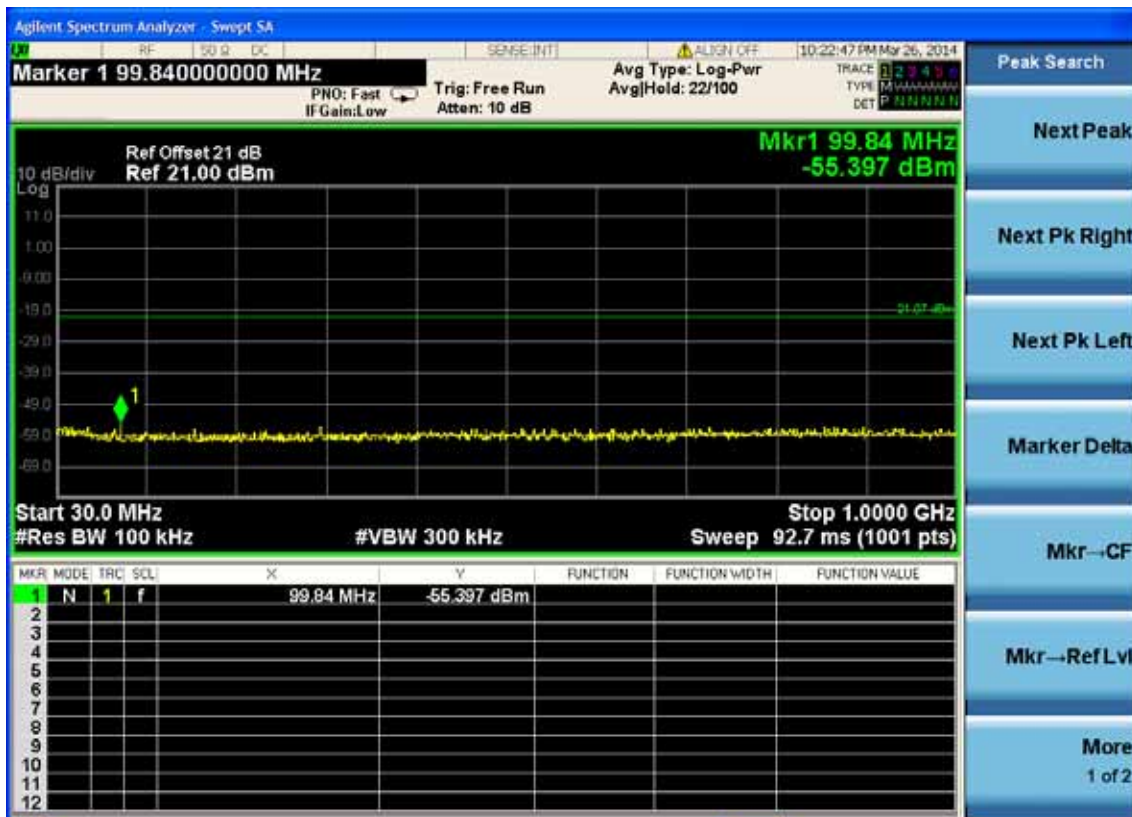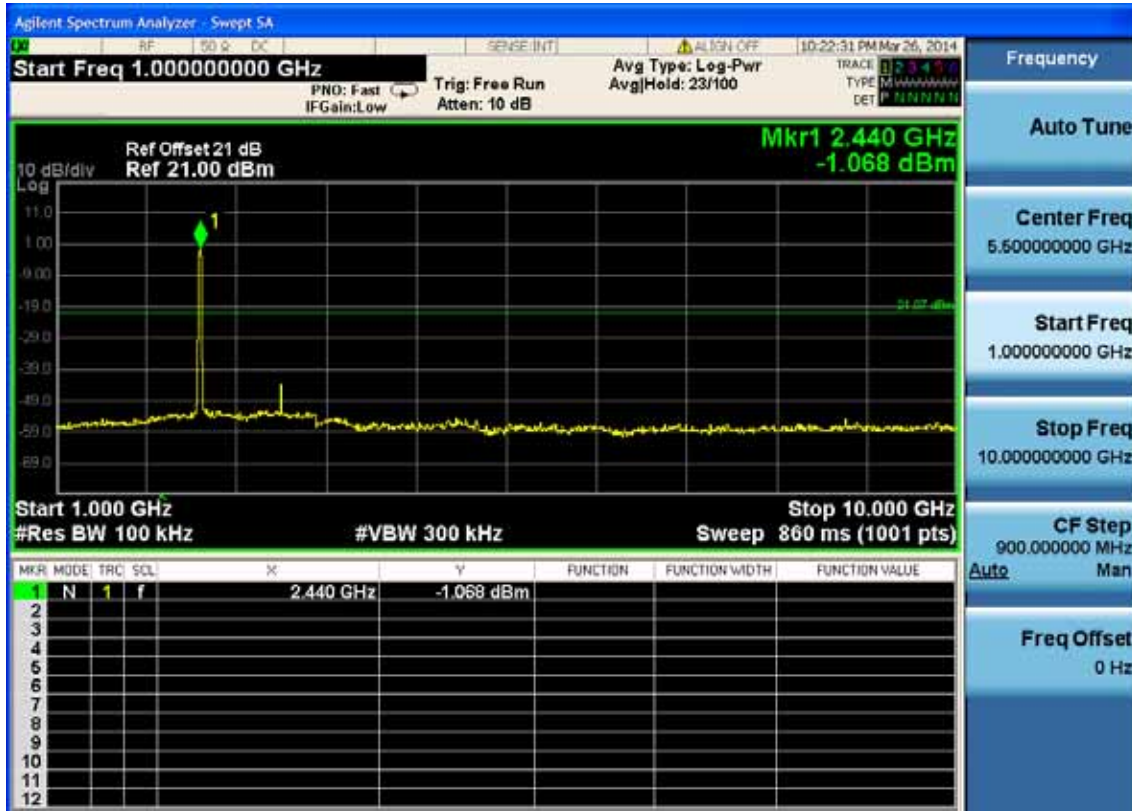


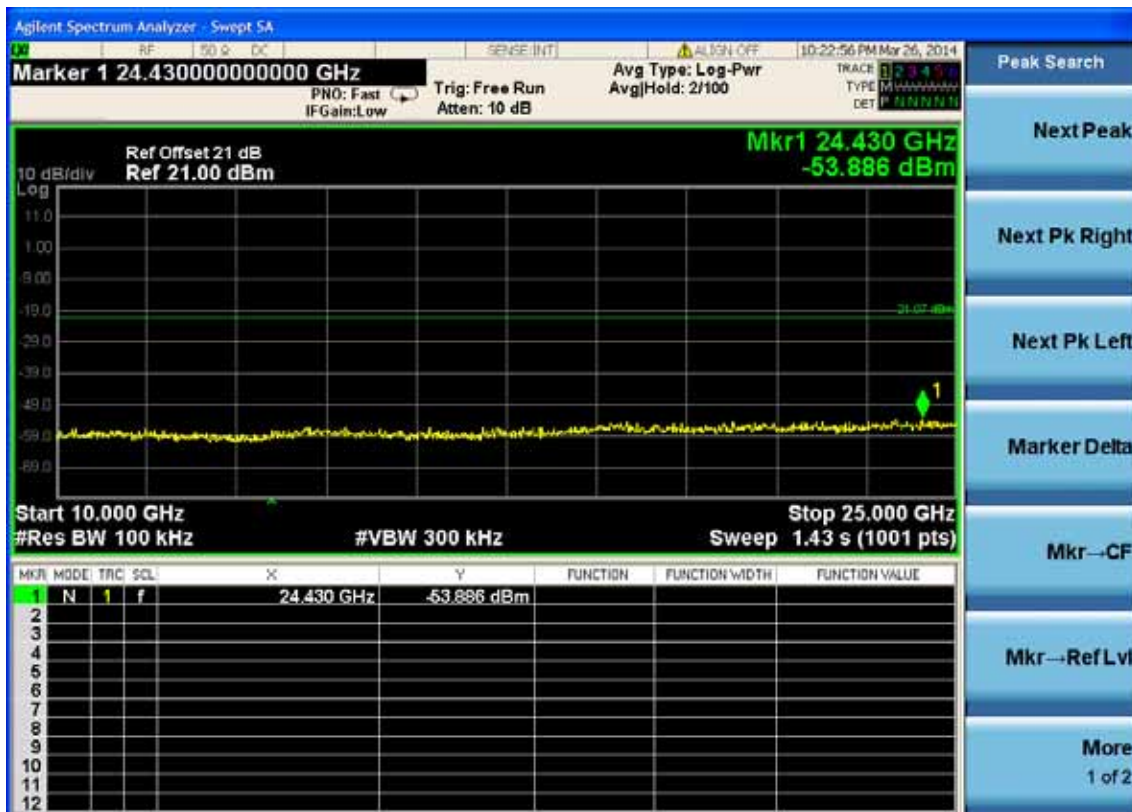

Test CH11: 2462MHz




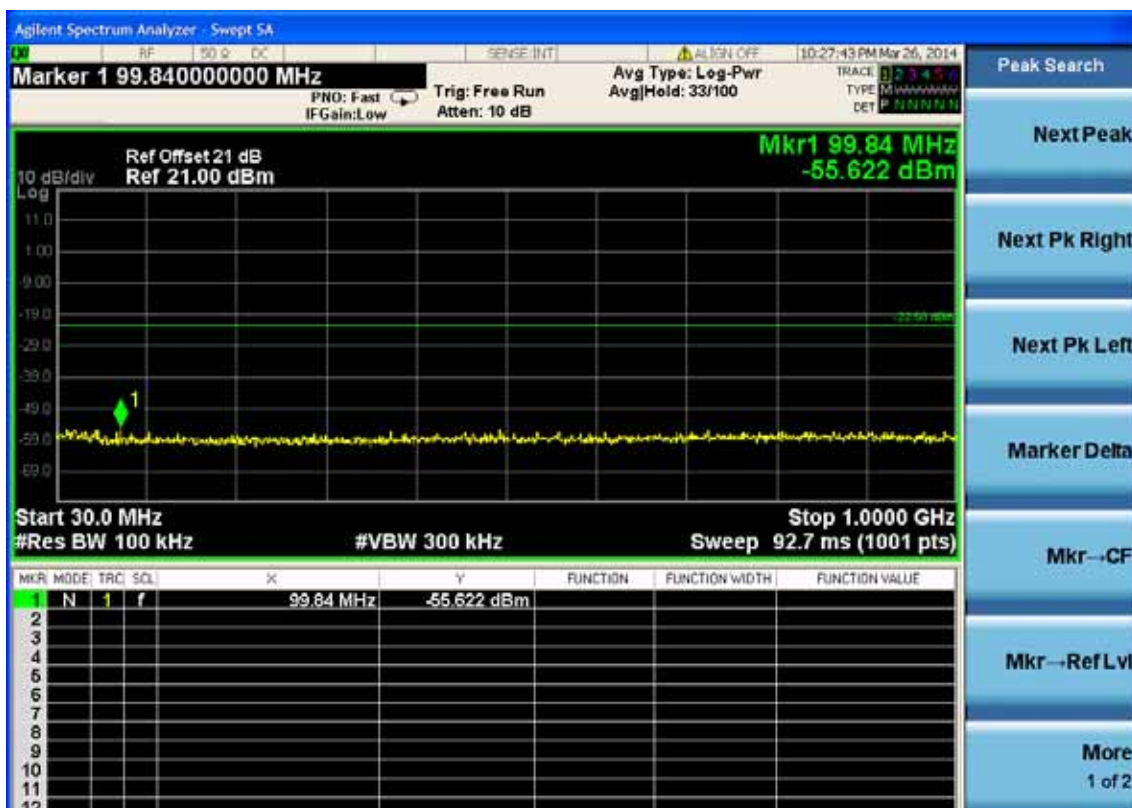
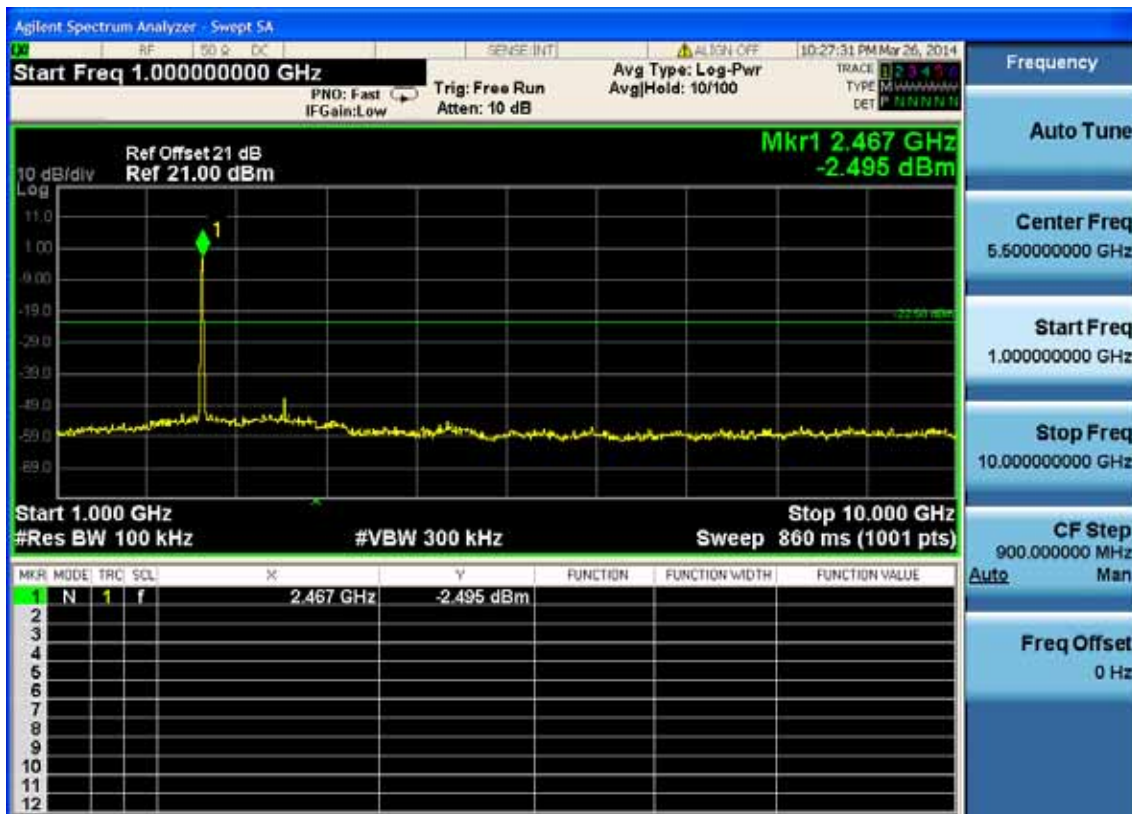


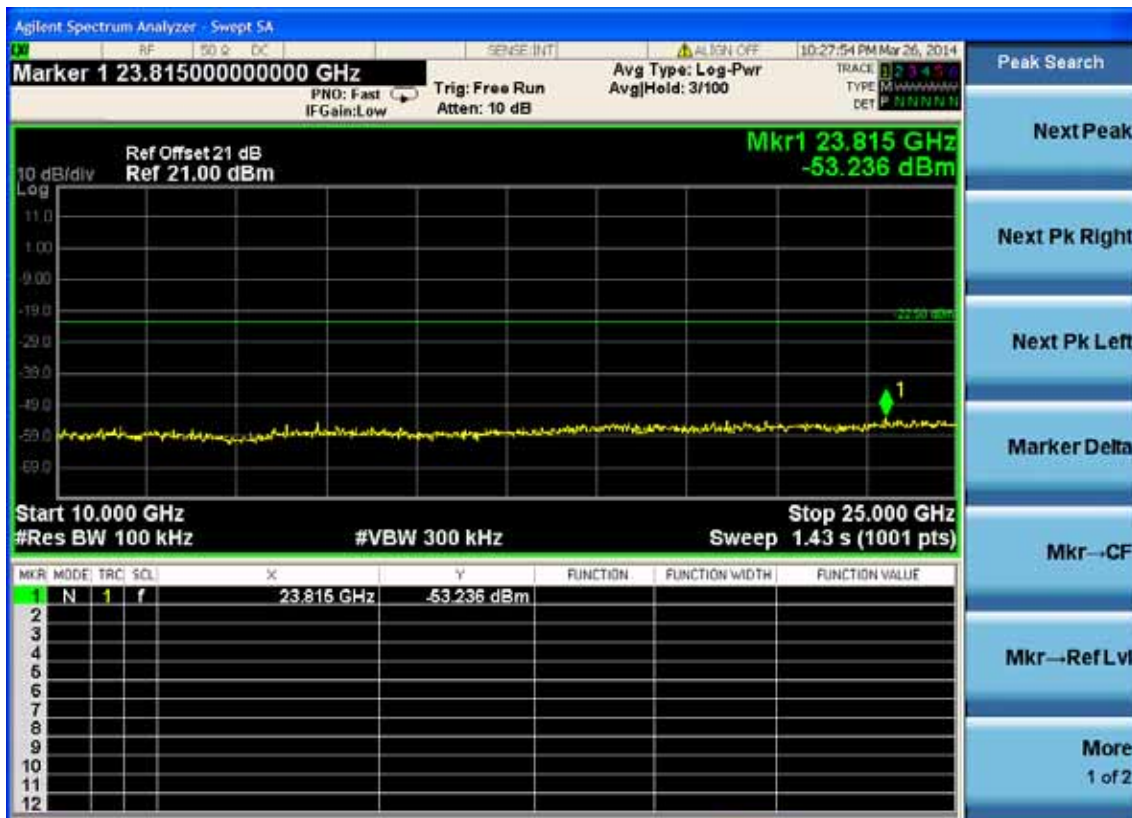

Test Mode: IEEE 802.11n HT40 TX

Test CH1: 2422MHz

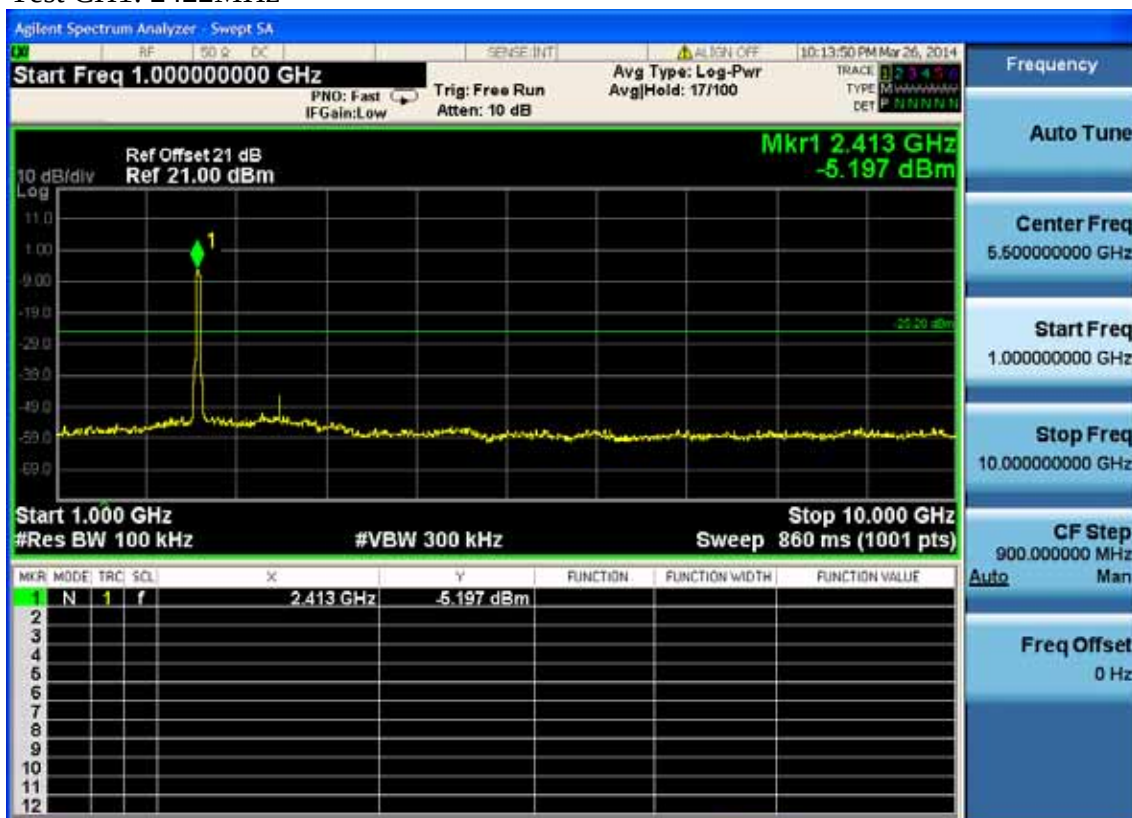

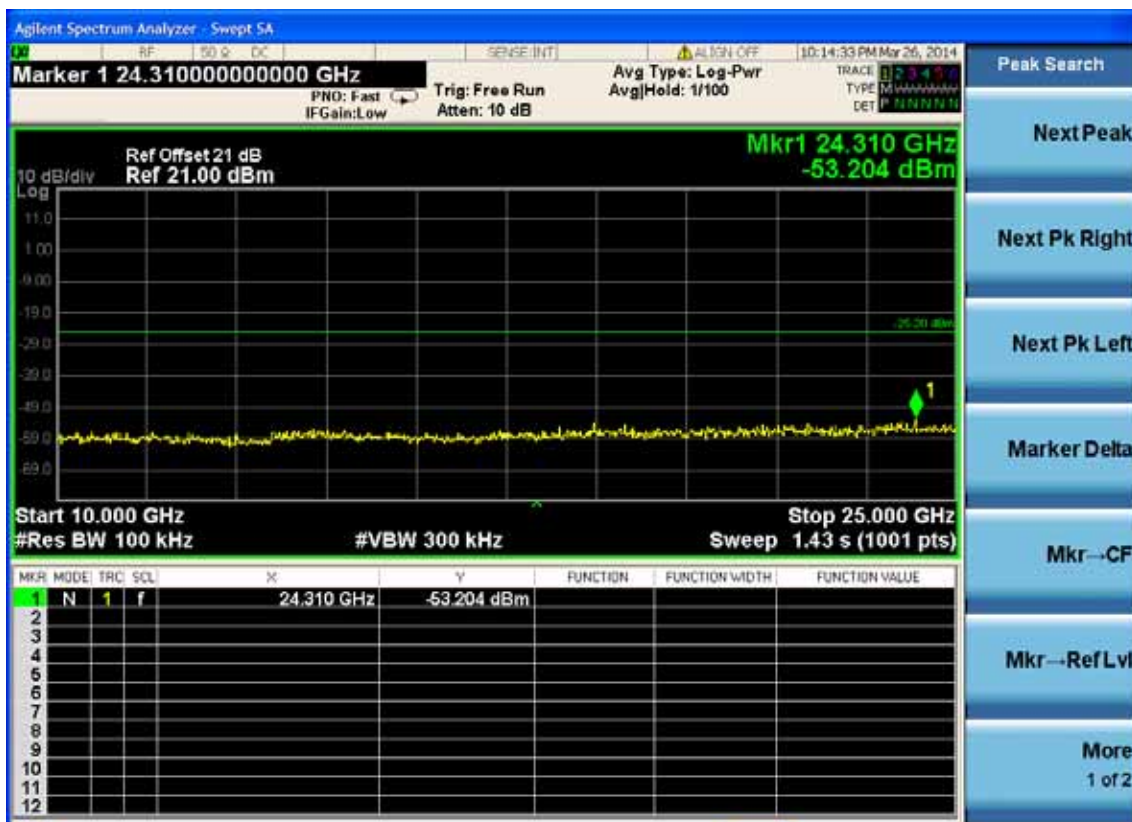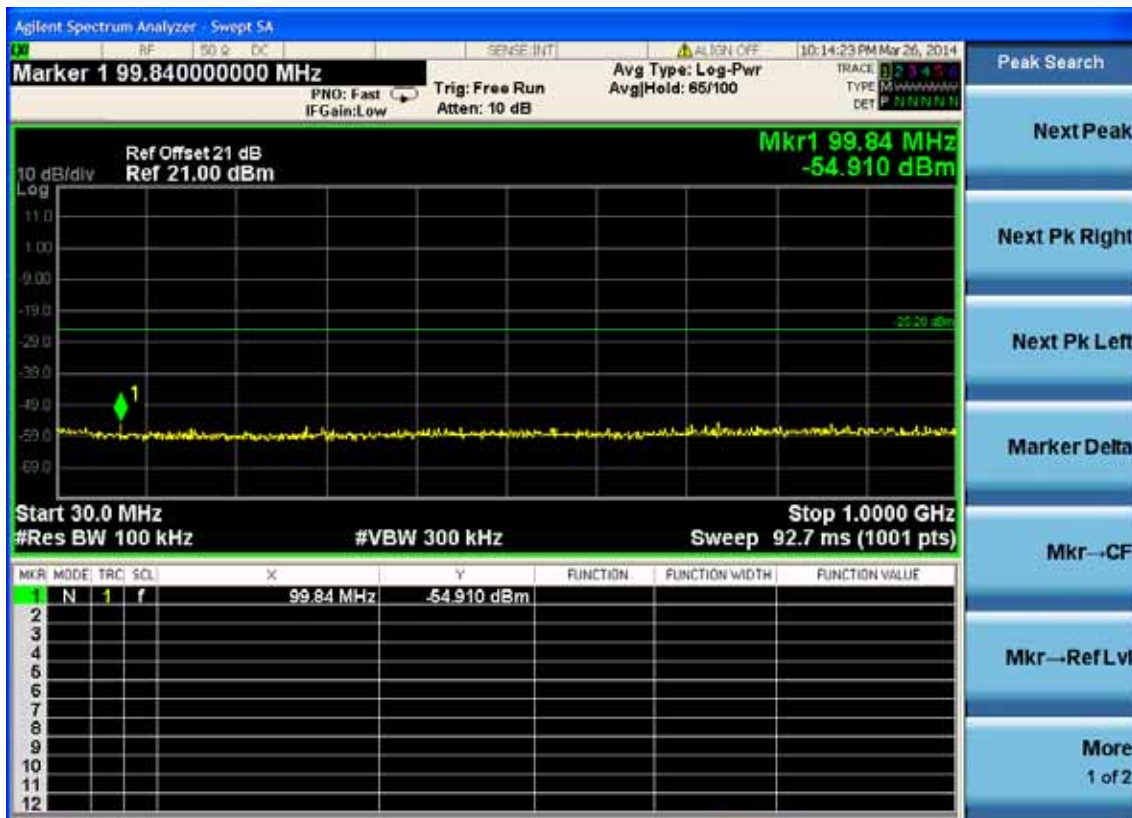



Test CH4: 2437MHz

