

MEASUREMENT REPORT

FCC PART 15.407 WLAN 802.11a/n/ac

FCC ID: TE7T3U

APPLICANT: TP-Link Technologies Co., Ltd.

Application Type: Certification

Product: AC1300 Mini Wireless MU-MIMO USB Adapter

Model No.: Archer T3U

Brand Name: tp-link

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part15 Subpart E (Section 15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01,
KDB 662911 D01v02r01

Test Date: October 26, 2018 ~ March 11, 2019

Reviewed By: 
(Paddy Chen)

Approved By: 
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1812TW0101-U2	Rev. 01	Initial report	03-26-2019	Valid

CONTENTS

Description	Page
§2.1033 General Information	6
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report.....	9
2.4. Description of Available Antennas.....	10
2.5. Description of Antenna RF Port	11
2.6. Test Mode	11
2.7. Description of Test Software	12
2.8. Configuration of Test System.....	14
2.9. Test System Details.....	14
2.10. Device Capabilities	15
2.11. Test Configuration	17
2.12. EMI Suppression Device(s)/Modifications.....	17
2.13. Labeling Requirements.....	17
3. DESCRIPTION OF TEST	18
3.1. Evaluation Procedure	18
3.2. AC Line Conducted Emissions	18
3.3. Radiated Emissions.....	19
4. ANTENNA REQUIREMENTS.....	20
5. TEST EQUIPMENT CALIBRATION DATE	21
6. MEASUREMENT UNCERTAINTY.....	22
7. TEST RESULT	23
7.1. Summary	23
7.2. 26dB Bandwidth Measurement.....	24
7.2.1. Test Limit	24
7.2.2. Test Procedure used.....	24
7.2.3. Test Setting.....	24
7.2.4. Test Setup	24
7.2.5. Test Result.....	25

7.3.	6dB Bandwidth Measurement.....	38
7.3.1.	Test Limit	38
7.3.2.	Test Procedure used.....	38
7.3.3.	Test Setting.....	38
7.3.4.	Test Setup	38
7.3.5.	Test Result.....	39
7.4.	Output Power Measurement.....	44
7.4.1.	Test Limit	44
7.4.2.	Test Procedure Used	44
7.4.3.	Test Setting.....	44
7.4.4.	Test Setup	44
7.4.5.	Test Result.....	45
7.5.	Transmit Power Control	49
7.5.1.	Test Limit	49
7.5.2.	Test Procedure Used	49
7.5.3.	Test Setting.....	49
7.5.4.	Test Setup	49
7.5.5.	Test Result.....	49
7.6.	Power Spectral Density Measurement.....	50
7.6.1.	Test Limit	50
7.6.2.	Test Procedure Used	50
7.6.3.	Test Setting.....	50
7.6.4.	Test Setup	51
7.6.5.	Test Result.....	52
7.7.	Frequency Stability Measurement.....	75
7.7.1.	Test Limit	75
7.7.2.	Test Procedure Used	75
7.7.3.	Test Setup	76
7.7.4.	Test Result.....	77
7.8.	Radiated Spurious Emission Measurement	78
7.8.1.	Test Limit	78
7.8.2.	Test Procedure Used	78
7.8.3.	Test Setting.....	78
7.8.4.	Test Setup	80
7.8.5.	Test Result.....	81
7.9.	Radiated Restricted Band Edge Measurement	141
7.9.1.	Test Limit	141
7.9.2.	Test Procedure Used	142
7.9.3.	Test Setting.....	143

7.9.4. Test Setup	144
7.9.5. Test Result.....	145
7.10. AC Conducted Emissions Measurement.....	259
7.10.1. Test Limit	259
7.10.2. Test Procedure	259
7.10.3. Test Setup	260
7.10.4. Test Result.....	261
8. CONCLUSION.....	263
Appendix A - Test Setup Photograph	264
Appendix B - EUT Photograph.....	265

§2.1033 General Information

Applicant:	TP-Link Technologies Co., Ltd.
Applicant Address:	Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China
Manufacturer:	TP-Link Technologies Co., Ltd.
Manufacturer Address:	Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park,Nanshan Shenzhen, 518057 China
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
FCC Registration No.:	291082
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 153292 and 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

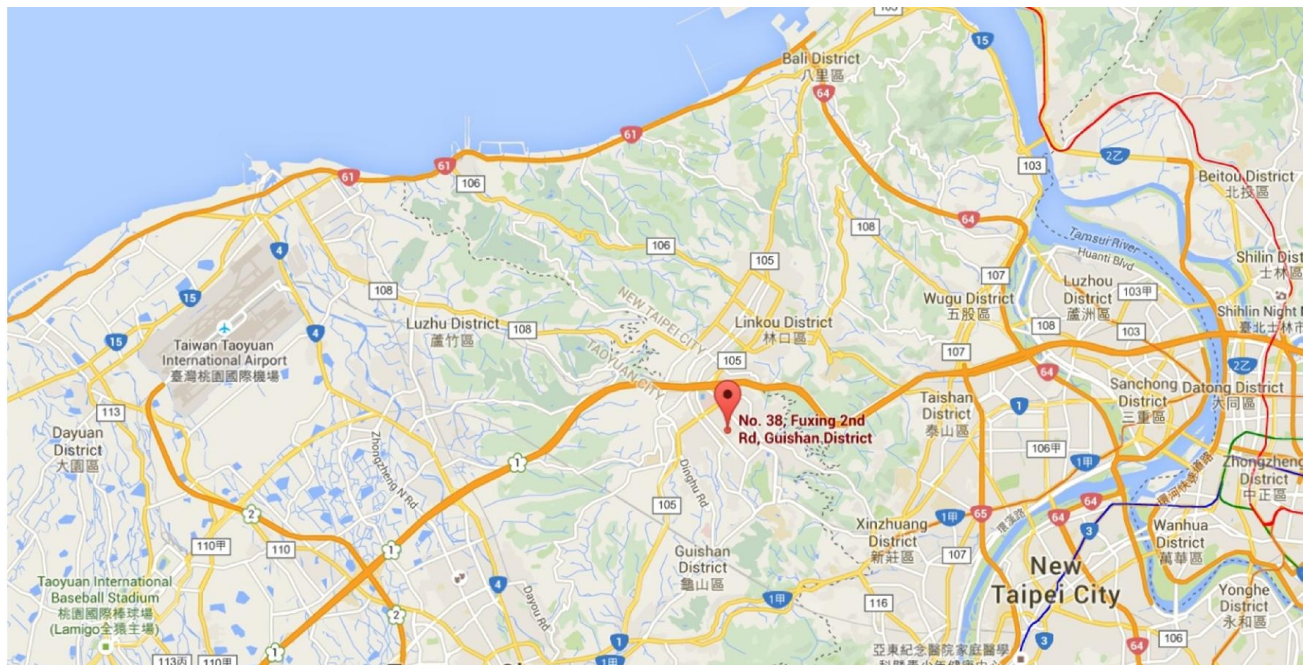

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	AC1300 Mini Wireless MU-MIMO USB Adapter
Model No.:	Archer T3U
Brand Name:	tp-link
Wi-Fi Specification:	802.11a/b/g/n/ac

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5260~5320MHz, 5500~5580MHz, 5660~5700MHz 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5270~5310MHz, 5510MHz, 5550MHz, 5670MHz 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
134	5670 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
155	5775 MHz	--	--	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	TX Paths	Max Antenna Gain (dBi)		Directional Gain (dBi)	
			Ant 0	Ant 1	For Power	For PSD
PIFA Antenna	2400 ~ 2500	2	1.94	1.76	1.94	4.95
	5150 ~ 5850	2	1.99	1.93	1.99	5.00

Note:

- 802.11a, 802.11b, 802.11g support single transmission at Ant 0 port only.
- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.


If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;

If antenna gains are not equal and each transmit antenna is driven by only one spatial stream,
Directional gain = $G_{ANT} + \text{Array Gain}$,

- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;

2.5. Description of Antenna RF Port

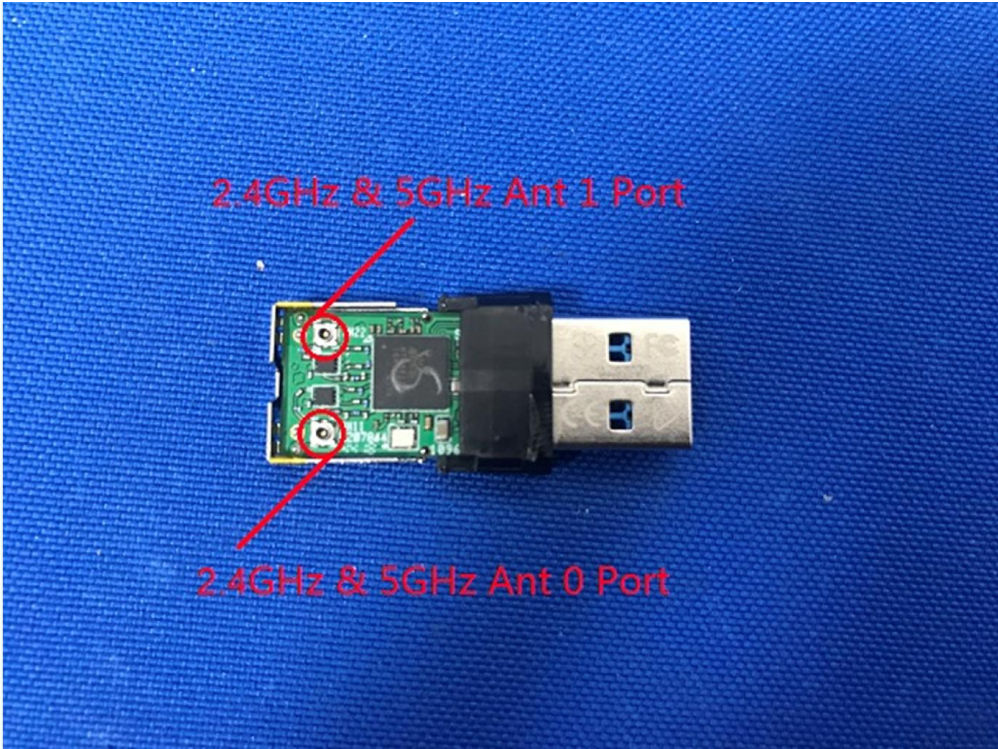Antenna RF Port				
Software	2.4GHz RF Port		5GHz RF Port	
Control Port	Ant 0	Ant 1	Ant 0	Ant 1
				

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS8)
	Mode 3: Transmit by 802.11n-HT40 (MCS8)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 6: Transmit by 802.11ac-VHT80 (MCS0)

2.7. Description of Test Software

The test utility software used during testing was “accessMTool”, and the version was “v3.1.0.1”.

Power Parameter Value:


Test Mode	Test Frequency (MHz)	Power Parameter Value		Test Mode	Test Frequency (MHz)	Power Parameter Value	
		Ant 0	Ant 1			Ant 0	Ant 1
802.11a	5180	42.0	--	802.11n-HT20	5180	42.0	42.0
	5220	42.0	--		5220	41.0	44.0
	5240	41.0	--		5240	41.0	44.0
	5260	42.0	--		5260	42.0	44.0
	5300	42.0	--		5300	43.0	45.0
	5320	42.0	--		5320	43.0	46.0
	5500	40.0	--		5500	40.0	45.0
	5580	40.0	--		5580	38.0	44.0
	5700	39.0	--		5700	41.0	44.0
	5745	43.0	--		5745	42.0	46.0
	5785	43.0	--		5785	44.0	49.0
	5825	43.0	--		5825	43.0	51.0
802.11n-HT40	5190	39.0	41.0	802.11ac-VHT20	5180	42.0	43.0
	5230	41.0	44.0		5220	41.0	43.0
	5270	41.0	44.0		5240	42.0	44.0
	5310	39.0	41.0		5260	42.0	45.0
	5510	38.0	43.0		5300	43.0	45.0
	5550	38.0	45.0		5320	44.0	46.0
	5670	38.0	43.0		5500	42.0	46.0
	5755	42.0	46.0		5580	39.0	44.0
	5795	42.0	47.0		5700	42.0	45.0
	--	--	--		5745	44.0	47.0
	--	--	--		5785	44.0	47.0
	--	--	--		5825	41.0	46.0

Test Mode	Test Frequency (MHz)	Power Parameter Value		Test Mode	Test Frequency (MHz)	Power Parameter Value	
		Ant 0	Ant 1			Ant 0	Ant 1
802.11ac-VHT40	5190	37.0	40.0	802.11ac-VHT80	5210	42.0	44.0
	5230	41.0	44.0		5290	35.0	37.0
	5270	41.0	44.0		5530	38.0	43.0
	5310	40.0	42.0		5775	38.0	44.0
	5510	38.0	42.0		--	--	--
	5550	38.0	44.0		--	--	--
	5670	38.0	44.0		--	--	--
	5755	40.0	45.0		--	--	--
	5795	40.0	45.0		--	--	--

2.8. Configuration of Test System

The **AC1300 Mini Wireless MU-MIMO USB Adapter** was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

Connection Diagram

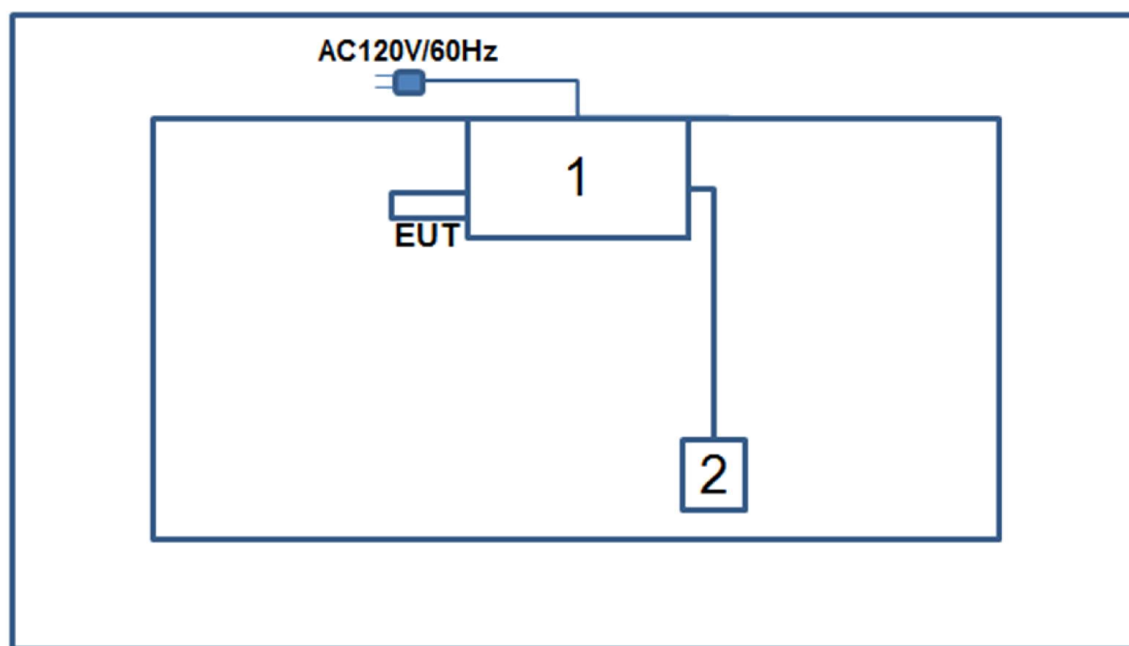

Signal Cable Type		Signal Cable Description
A	N/A	N/A

2.9. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook	Lenovo	E431	PF-10ZRN 13/12	Non-Shielded, 1.8m
2 Mouse	DELL	MS111-T	N/A	Shielded, 1.8m


2.10. Device Capabilities

This device contains the following capabilities:


2.4GHz WLAN (DTS), 5GHz WLAN (UNII).

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz, 80MHz and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz per the guidance of Section B)2)b) of KDB 789033 D02v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Model No.	Test Mode	Duty Cycle
Archer T3U	802.11a	96.24%
	802.11n-HT20	96.00%
	802.11n-HT20	92.17%
	802.11ac-VHT20	96.02%
	802.11ac-VHT40	92.42%
	802.11ac-VHT80	85.50%

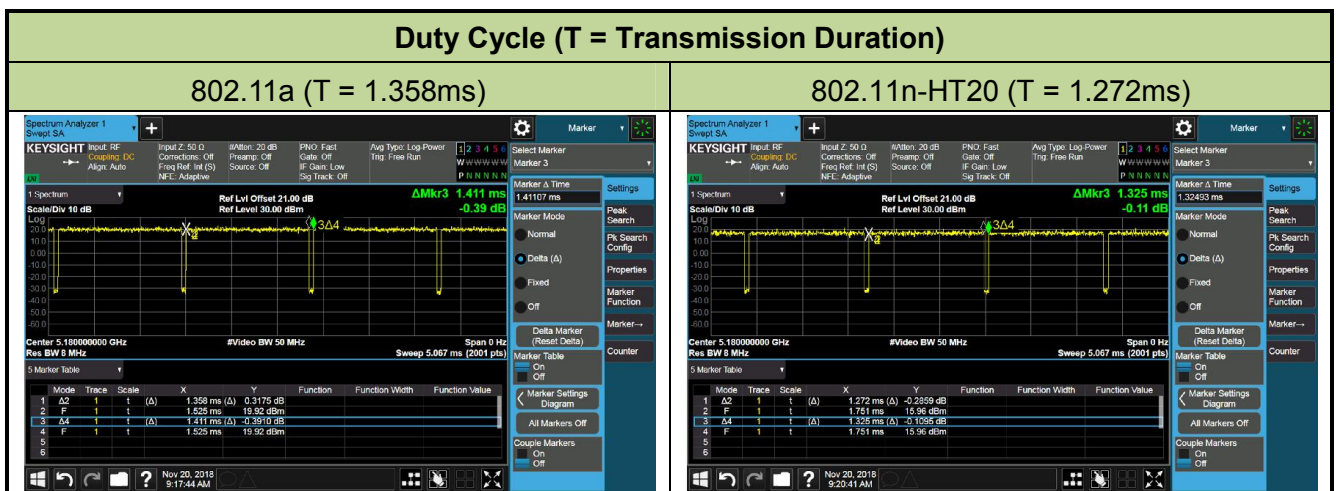

802.11n-HT40 (T = 631.7s)

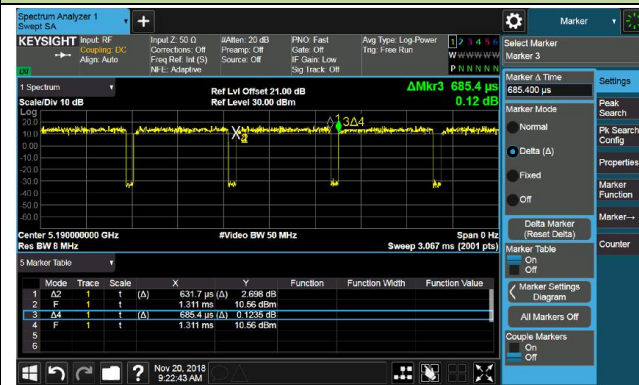


802.11ac-VHT20 (T = 1.277ms)

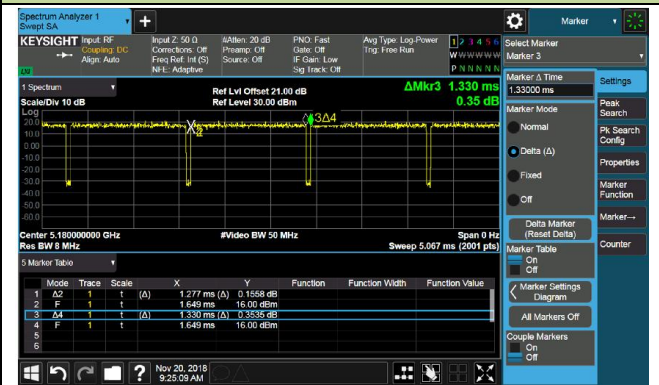

802.11ac-VHT40 (T = 636.3us)



802.11ac-VHT80 (T = 316.0us)

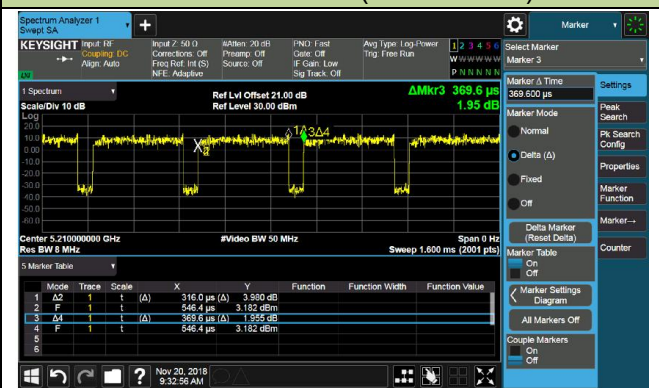

2.11. Test Configuration

The **AC1300 Mini Wireless MU-MIMO USB Adapter** was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.12. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.13. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement of the **AC1300 Mini Wireless MU-MIMO USB Adapter**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **AC1300 Mini Wireless MU-MIMO USB Adapter** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2019/3/20
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2019/3/20
8-Wire ISN (T8)	R&S	ENY81	MRTTWA00018	1 year	2019/4/24
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2019/5/14
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2019/5/21

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2019/4/24
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2019/5/22
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2019/4/24
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2019/4/23
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2019/4/23
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2019/4/23
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2019/3/19
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/7/30
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2019/5/18
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2019/5/21

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/7/30
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTSUE06457	1 year	2019/7/19
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2019/4/24
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2019/5/21

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 2.53dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.25dB 1GHz ~ 25GHz: 4.45dB
Spurious Emissions, Conducted - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.65dB
Output Power - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.84dB
Power Spectrum Density - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.65dB
Occupied Bandwidth - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.3%

7. TEST RESULT

7.1. Summary

Product Name: AC1300 Mini Wireless MU-MIMO USB Adapter

FCC ID: TE7T3U

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to section 7.4		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		N/A	Section 7.5
15.407(a)(1)(ii), (2), (3), (5)	Peak Power Spectral Density	Refer to section 7.6		Pass	Section 7.6
15.407(g)	Frequency Stability	$\pm 20\text{ ppm}$		Pass	Section 7.7
15.407(b)(1), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits(Restricted Bands andRadiated Emission Limits)	Emissions in restrictedbands must meet theradiated limits detailed in15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) Test Items “26dB Bandwidth” & “6dB Bandwidth” have been assessed MIMO transmission, and showed the worst test data in this report.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

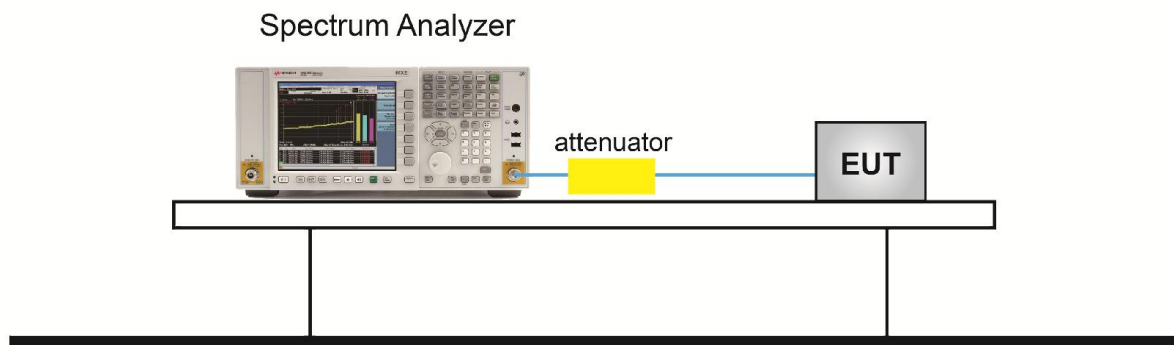

7.2.5. Test Result


Product	AC1300 Mini Wireless MU-MIMO USB Adapter	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	SR1	Test Date	2018/11/20

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	6Mbps	36	5180	21.32	16.66
802.11a	6Mbps	44	5220	21.20	16.64
802.11a	6Mbps	48	5240	21.06	16.63
802.11a	6Mbps	52	5260	20.84	16.63
802.11a	6Mbps	60	5300	23.10	16.64
802.11a	6Mbps	64	5320	21.13	16.64
802.11a	6Mbps	100	5500	20.83	16.61
802.11a	6Mbps	116	5580	21.06	16.61
802.11a	6Mbps	140	5700	20.95	16.60
802.11a	6Mbps	149	5745	20.78	16.63
802.11a	6Mbps	157	5785	21.57	16.63
802.11a	6Mbps	165	5825	21.67	16.63
802.11n-HT20	MCS8	36	5180	20.99	17.66
802.11n-HT20	MCS8	44	5220	20.94	17.67
802.11n-HT20	MCS8	48	5240	21.62	17.70
802.11n-HT20	MCS8	52	5260	21.04	17.68
802.11n-HT20	MCS8	60	5300	21.66	17.69
802.11n-HT20	MCS8	64	5320	20.97	17.68
802.11n-HT20	MCS8	100	5500	20.91	17.66
802.11n-HT20	MCS8	116	5580	20.78	17.66
802.11n-HT20	MCS8	140	5700	21.08	17.66
802.11n-HT20	MCS8	149	5745	20.88	17.65
802.11n-HT20	MCS8	157	5785	20.96	17.70
802.11n-HT20	MCS8	165	5825	21.66	17.69


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11n-HT40	MCS8	38	5190	43.89	36.64
802.11n-HT40	MCS8	46	5230	43.81	36.63
802.11n-HT40	MCS8	54	5270	43.31	36.61
802.11n-HT40	MCS8	62	5310	43.72	36.53
802.11n-HT40	MCS8	102	5510	43.47	36.59
802.11n-HT40	MCS8	110	5550	43.51	36.58
802.11n-HT40	MCS8	134	5670	43.70	36.68
802.11n-HT40	MCS8	151	5755	46.74	36.67
802.11n-HT40	MCS8	159	5795	43.38	36.66
802.11ac-VHT20	MCS0	36	5180	21.31	17.69
802.11ac-VHT20	MCS0	44	5220	20.95	17.68
802.11ac-VHT20	MCS0	48	5240	21.18	17.71
802.11ac-VHT20	MCS0	52	5260	21.13	17.69
802.11ac-VHT20	MCS0	60	5300	21.27	17.68
802.11ac-VHT20	MCS0	64	5320	21.66	17.70
802.11ac-VHT20	MCS0	100	5500	20.74	17.68
802.11ac-VHT20	MCS0	116	5580	20.91	17.67
802.11ac-VHT20	MCS0	140	5700	20.73	17.66
802.11ac-VHT20	MCS0	149	5745	20.99	17.73
802.11ac-VHT20	MCS0	157	5785	21.47	17.74
802.11ac-VHT20	MCS0	165	5825	20.88	17.69
802.11ac-VHT40	MCS0	38	5190	42.65	36.62
802.11ac-VHT40	MCS0	46	5230	42.87	36.55
802.11ac-VHT40	MCS0	54	5270	43.19	36.56
802.11ac-VHT40	MCS0	62	5310	43.18	36.48
802.11ac-VHT40	MCS0	102	5510	42.69	36.51
802.11ac-VHT40	MCS0	110	5550	43.08	36.57
802.11ac-VHT40	MCS0	134	5670	42.99	36.54
802.11ac-VHT40	MCS0	151	5755	42.90	36.56
802.11ac-VHT40	MCS0	159	5795	43.75	36.61
802.11ac-VHT80	MCS0	42	5210	83.81	75.81
802.11ac-VHT80	MCS0	58	5290	83.34	75.75
802.11ac-VHT80	MCS0	106	5530	82.98	75.77
802.11ac-VHT80	MCS0	155	5775	83.59	75.76

802.11a 26dB Bandwidth & 99% Bandwidth - Ant 0

Channel 36 (5180MHz)

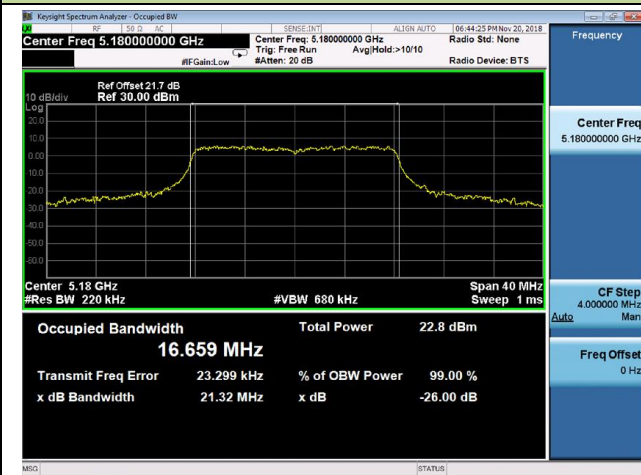

Channel 44 (5220MHz)

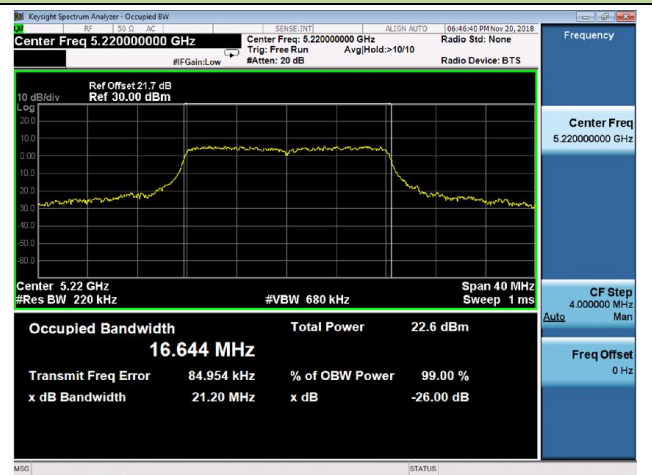

Channel 48 (5240MHz)



Channel 52 (5260MHz)




Channel 60 (5300MHz)




Channel 64 (5320MHz)



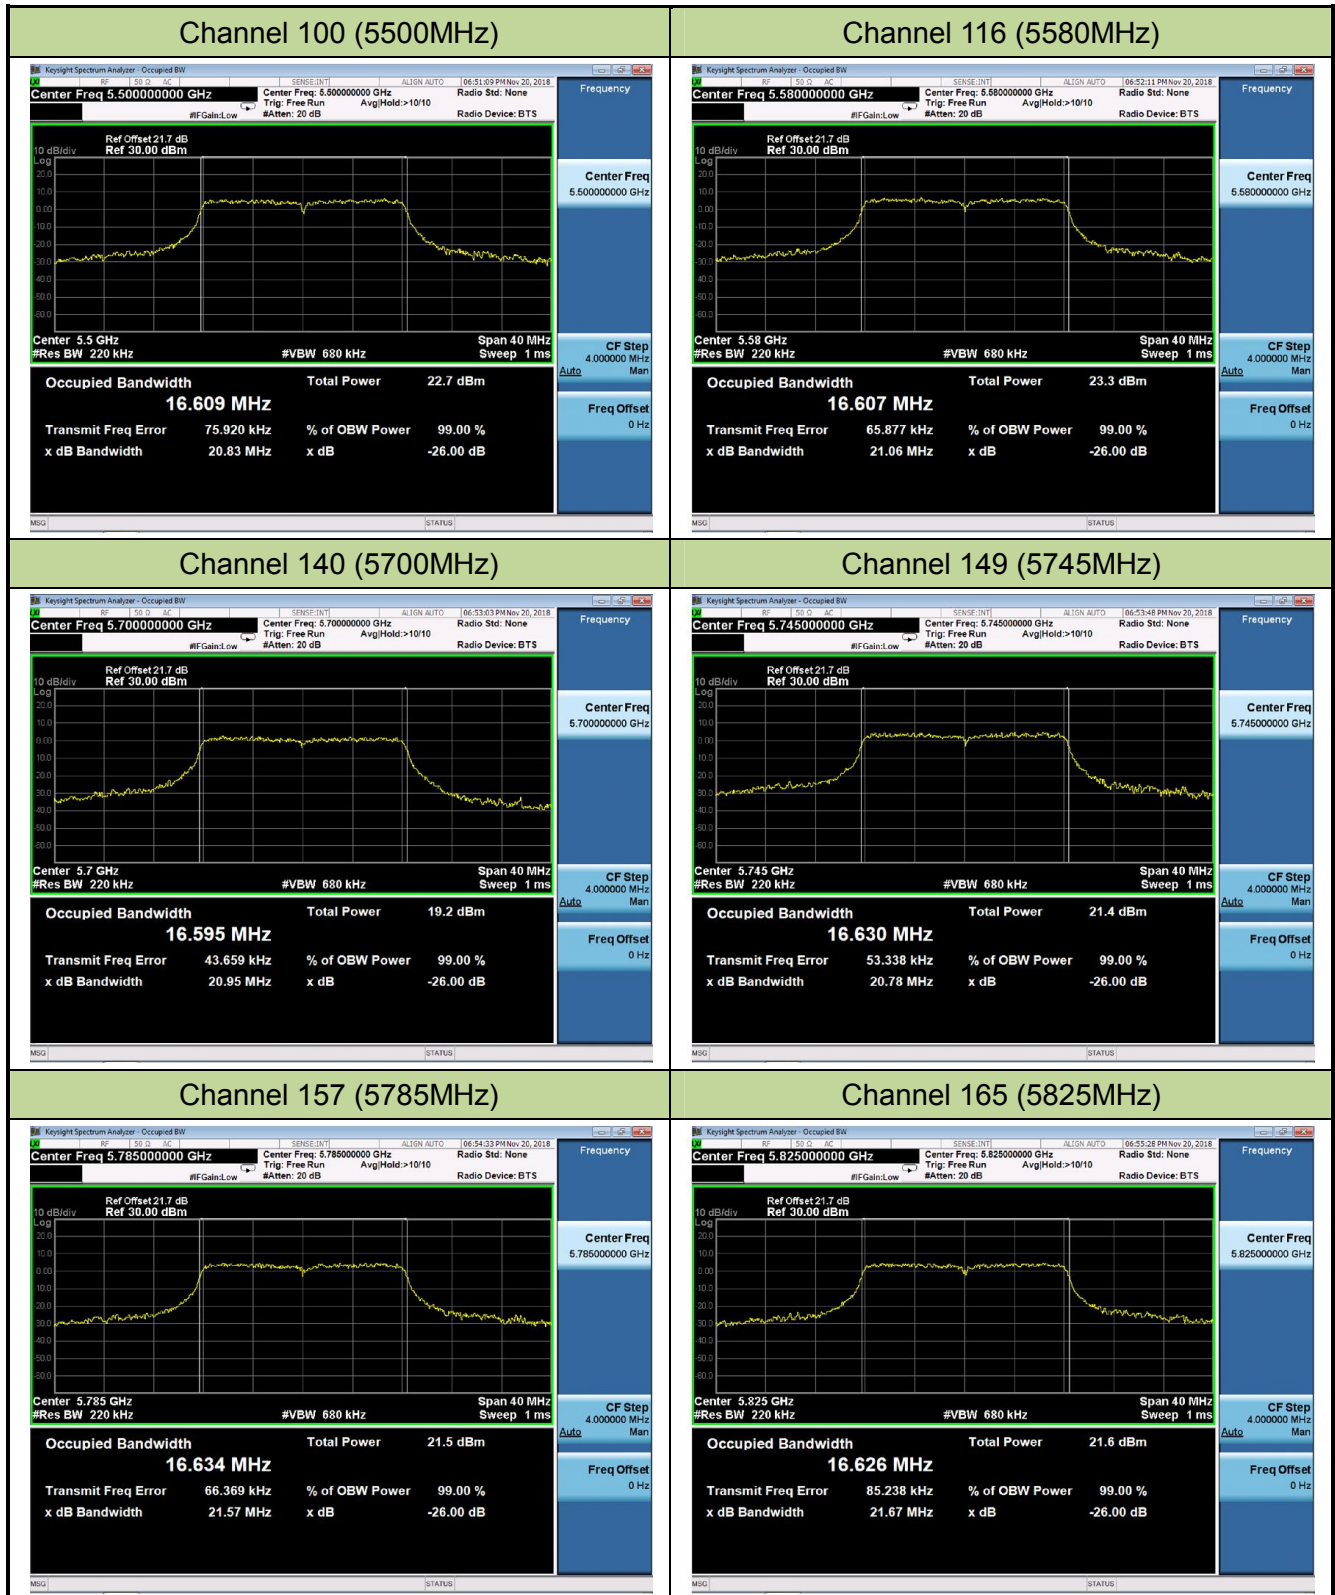


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1

Channel 36 (5180MHz)

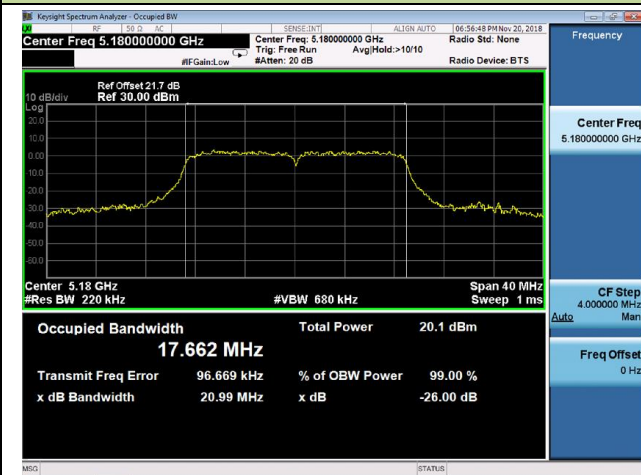


Channel 44 (5220MHz)

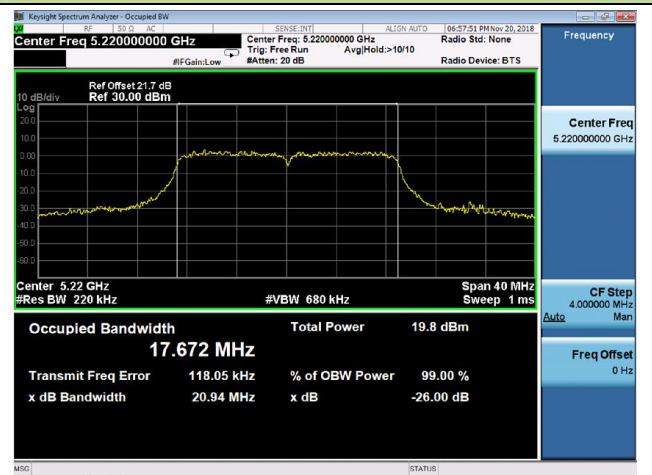


Channel 48 (5240MHz)




Channel 52 (5260MHz)

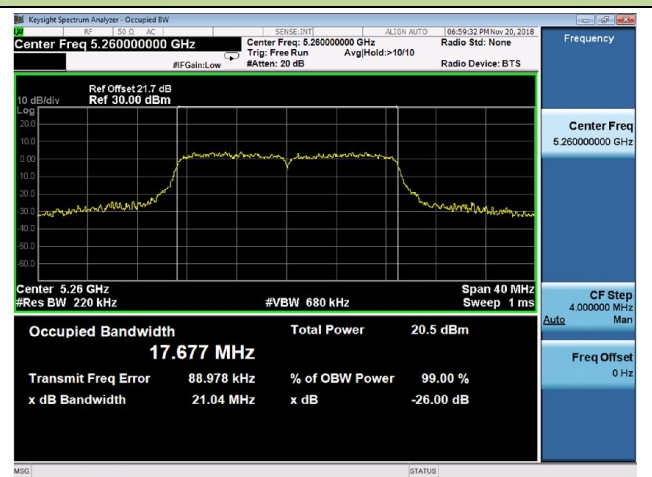


Channel 60 (5300MHz)

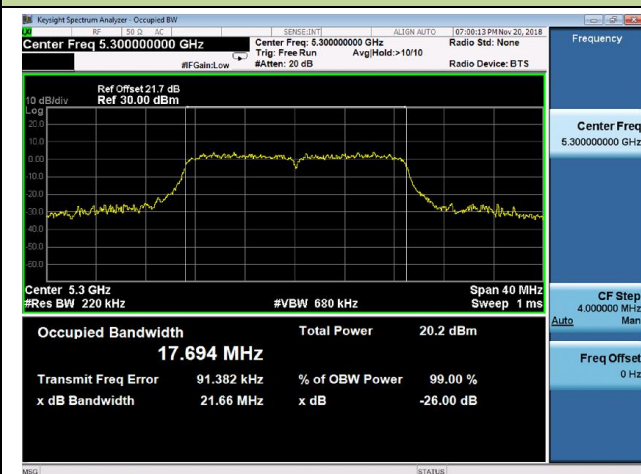


Channel 64 (5320MHz)

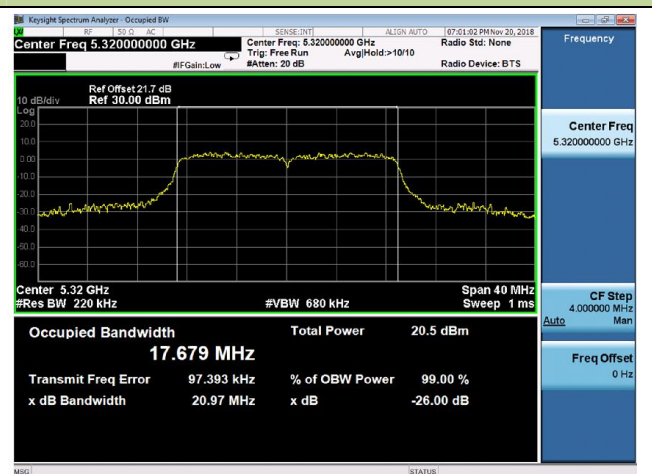

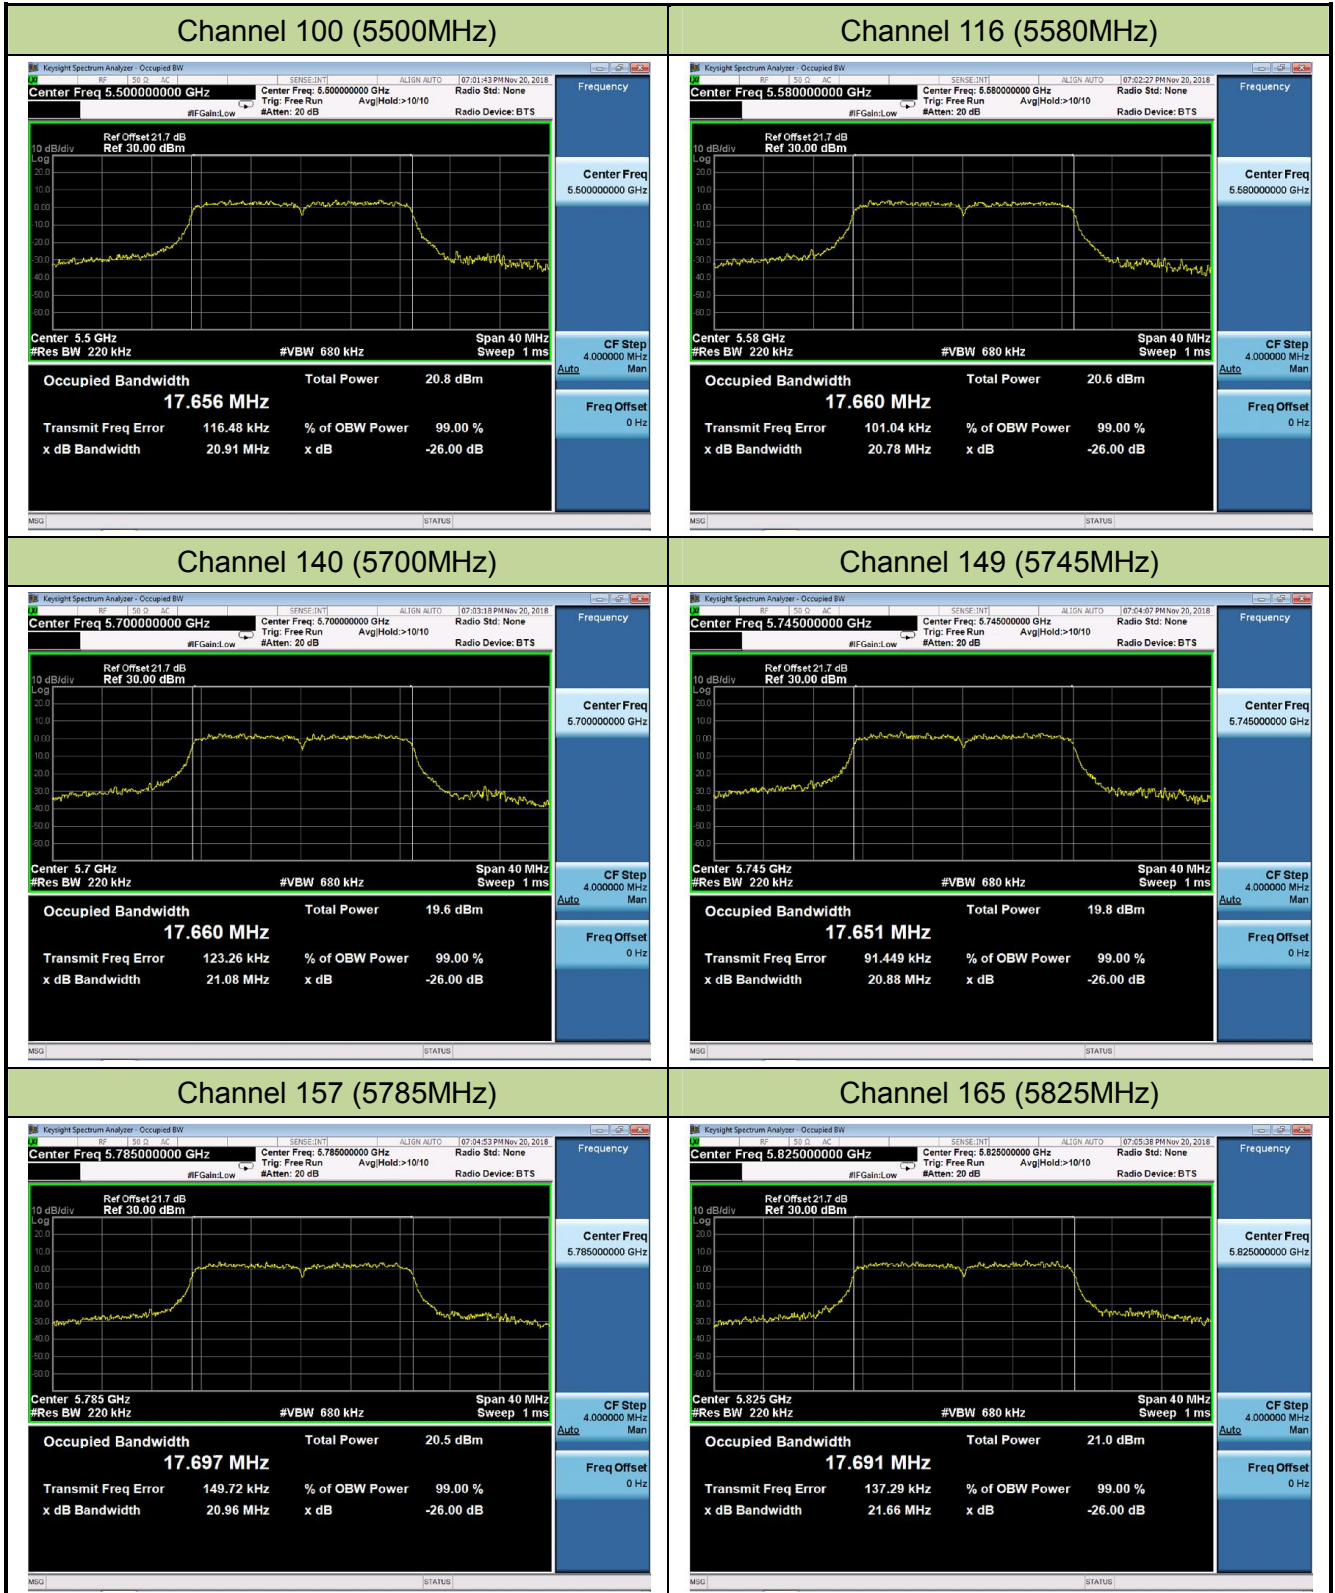


802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1


Channel 38 (5190MHz)

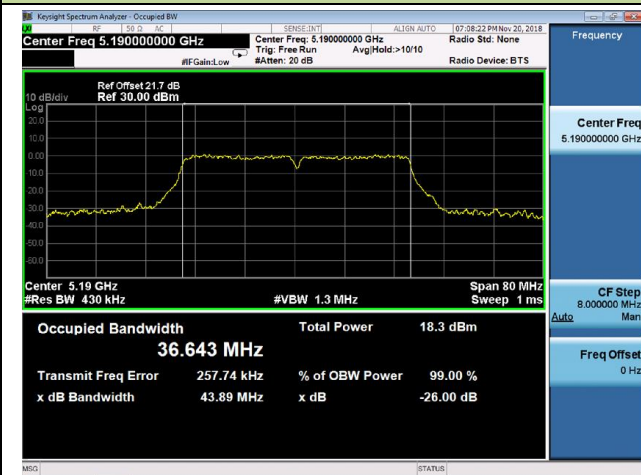


Channel 46 (5230MHz)

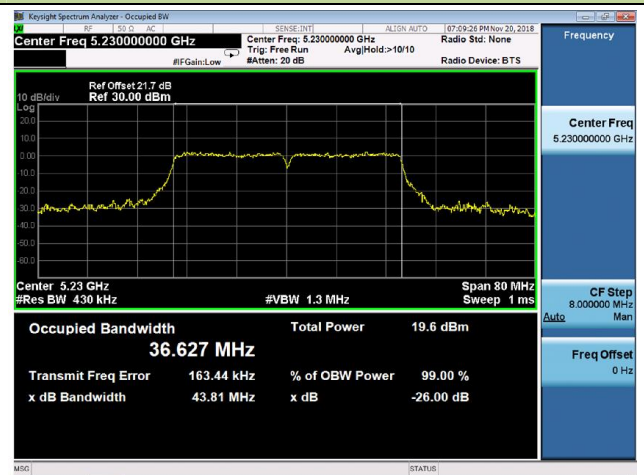

Channel 54 (5270MHz)

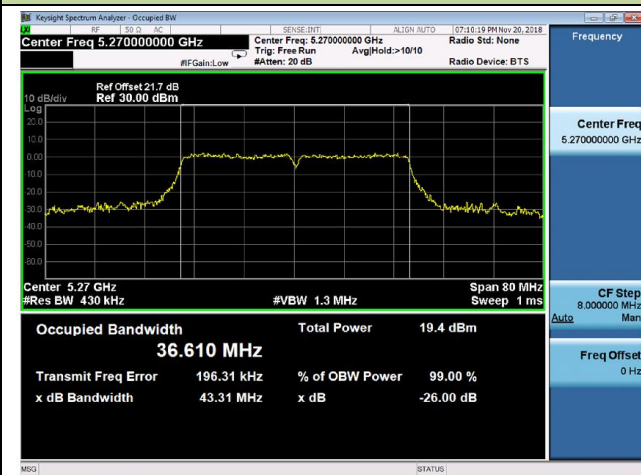

Channel 62 (5310MHz)

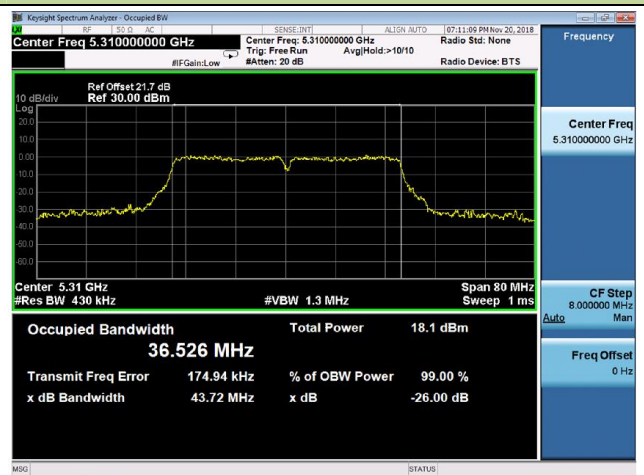


Channel 102 (5510MHz)




Channel 110 (5550MHz)



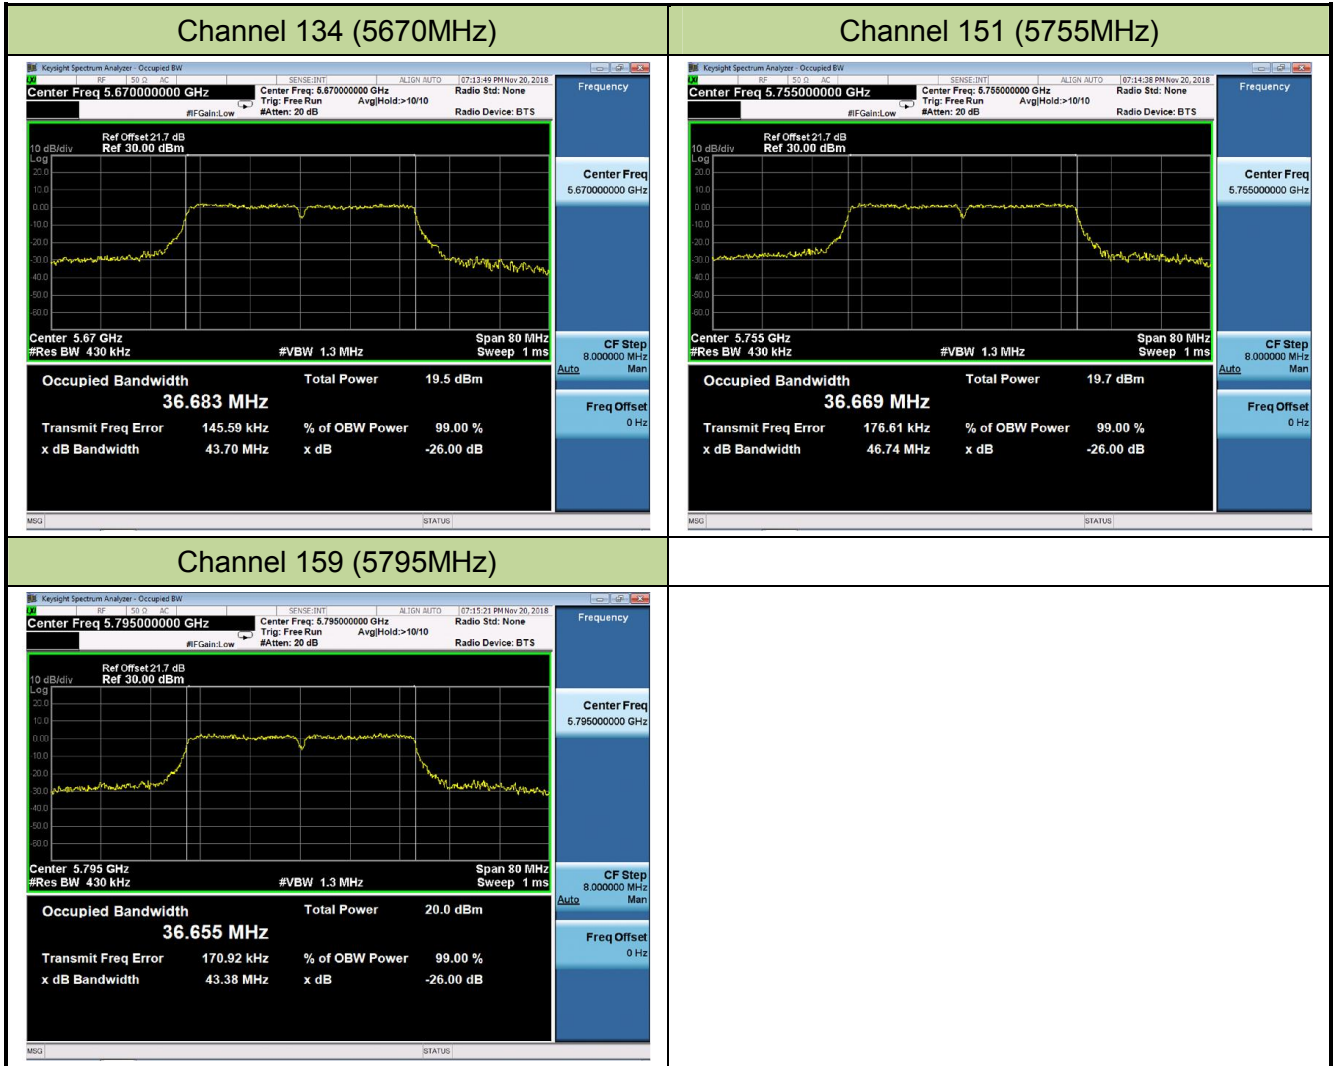


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1


Channel 36 (5180MHz)

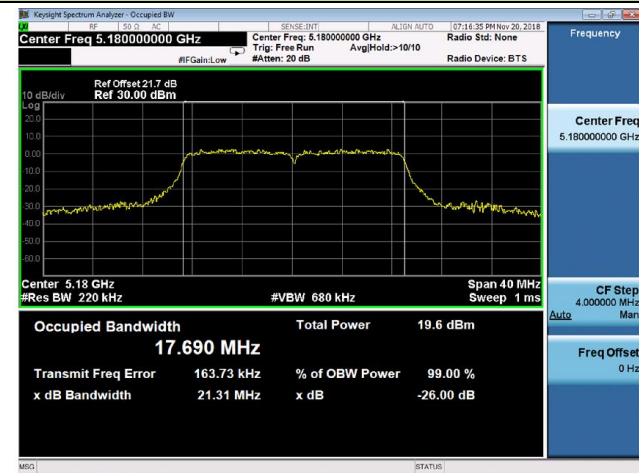


Channel 44 (5220MHz)

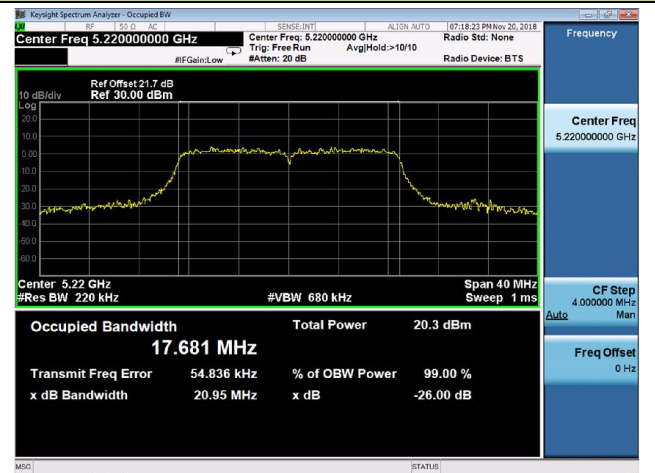


Channel 48 (5240MHz)

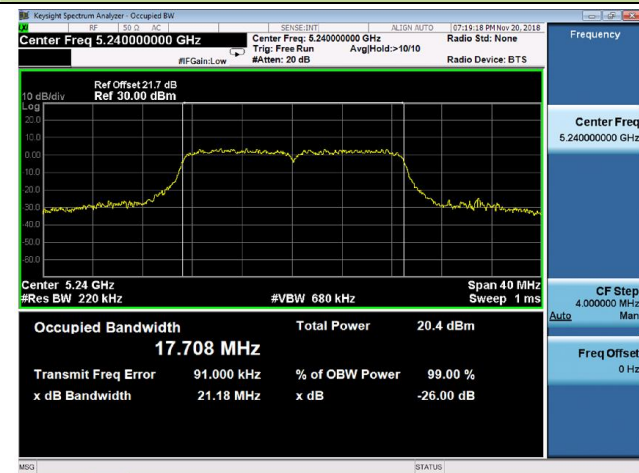


Channel 52 (5260MHz)

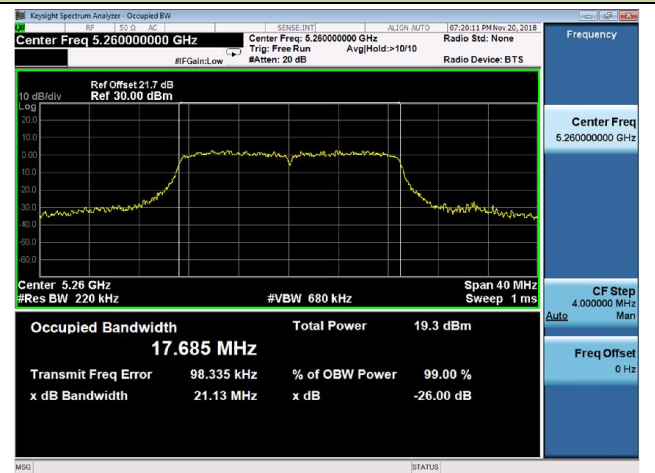


Channel 60 (5300MHz)

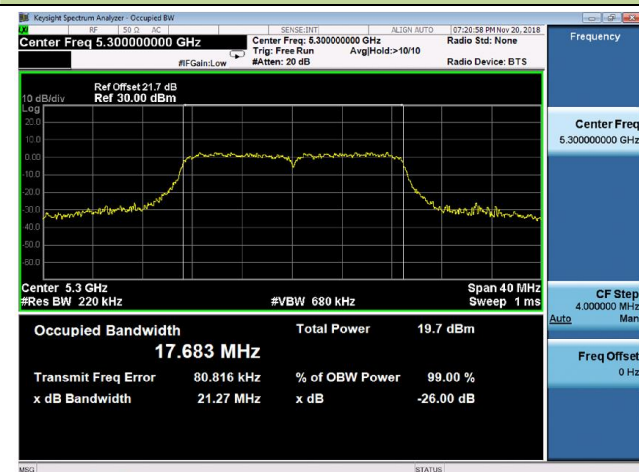


Channel 64 (5320MHz)

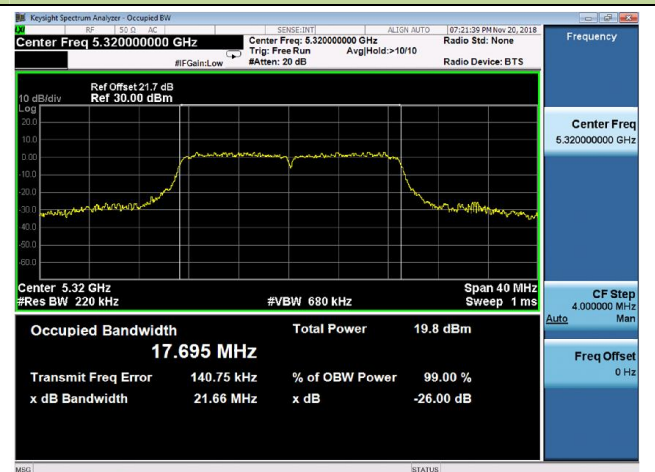

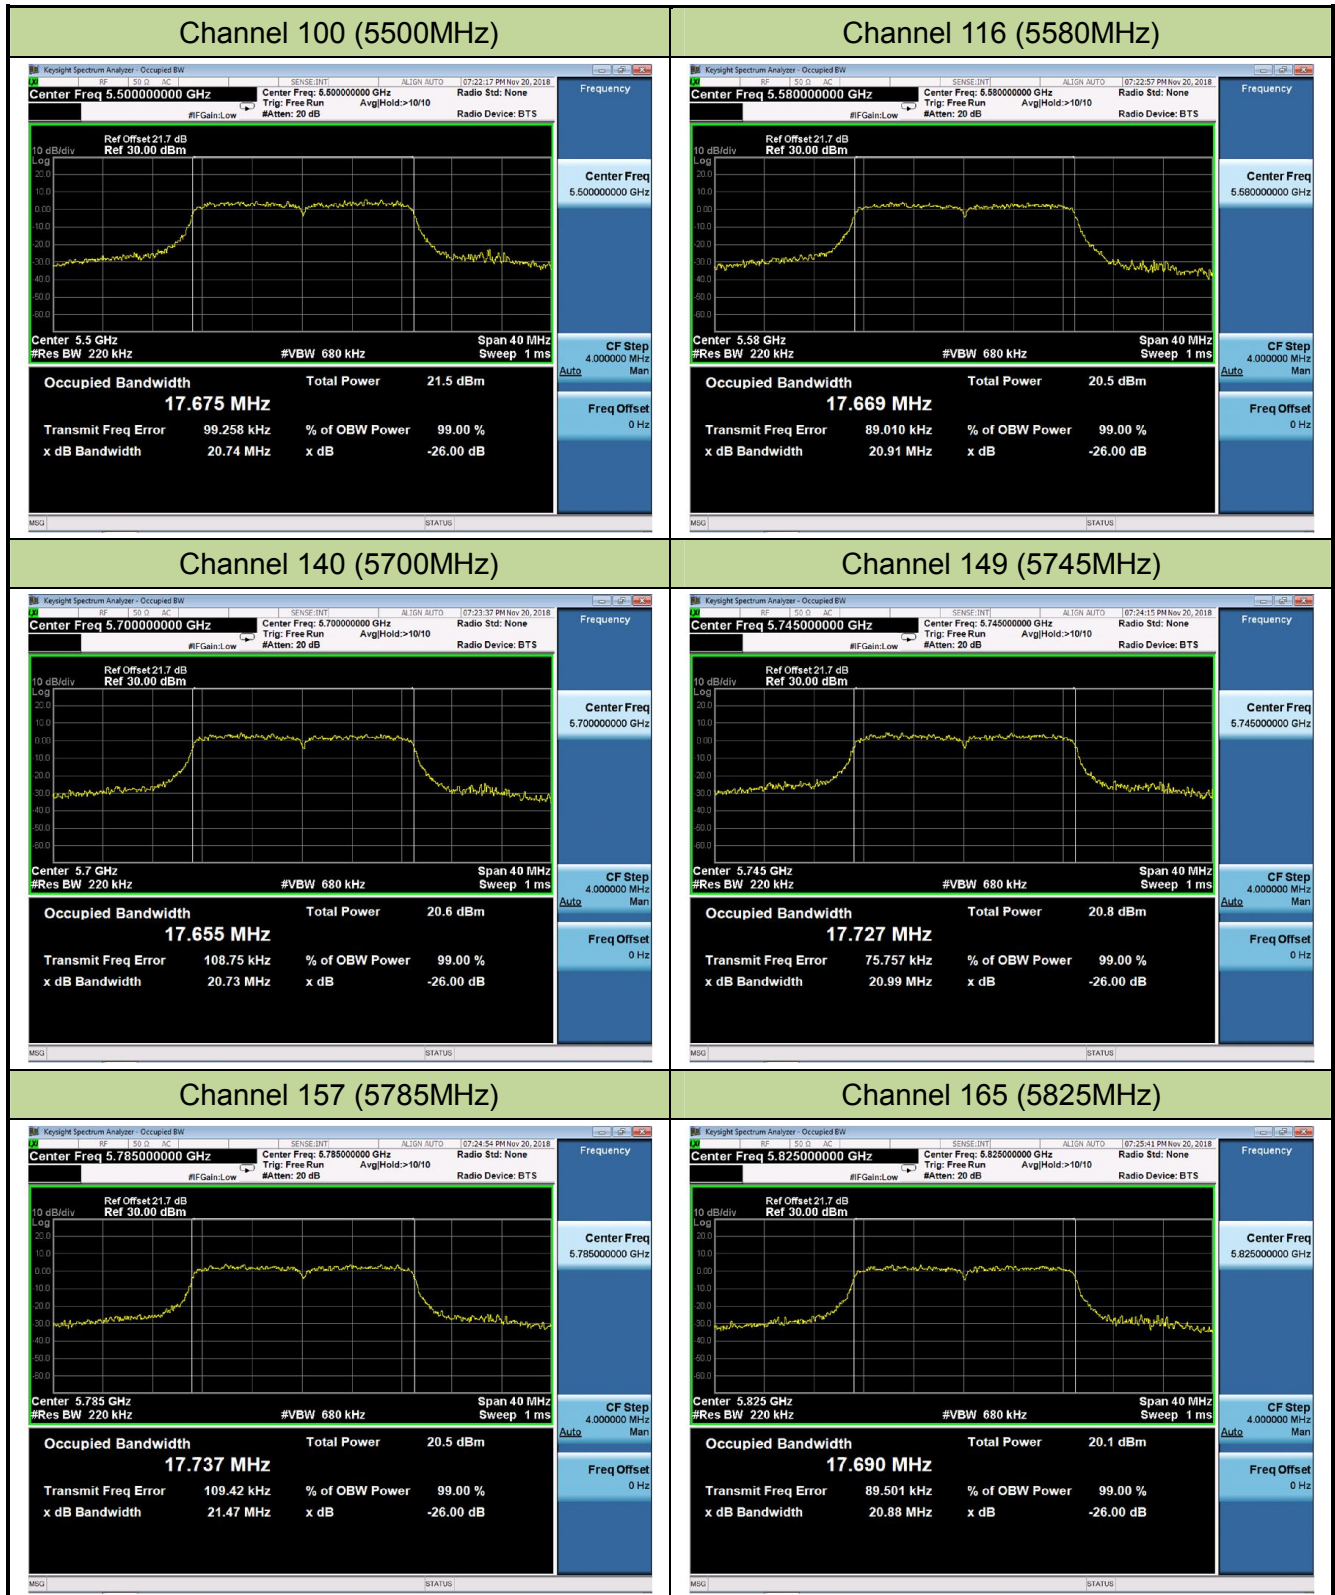


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1


Channel 38 (5190MHz)

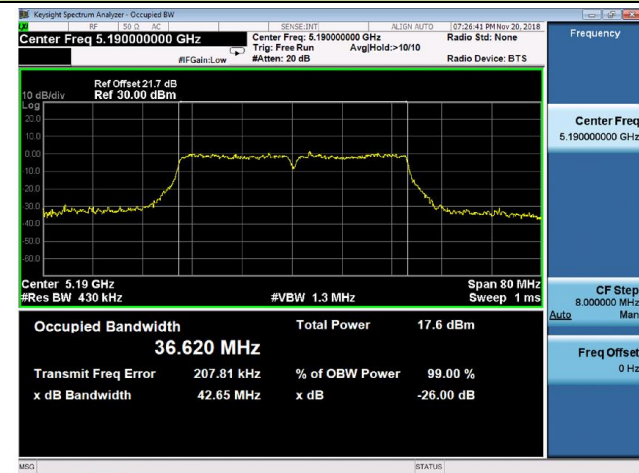


Channel 46 (5230MHz)

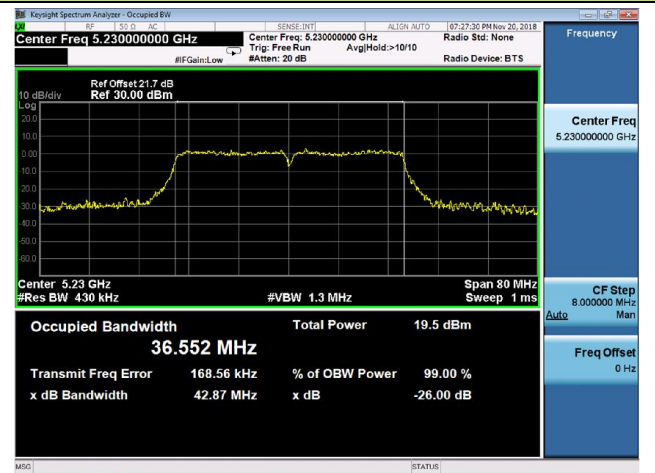


Channel 54 (5270MHz)

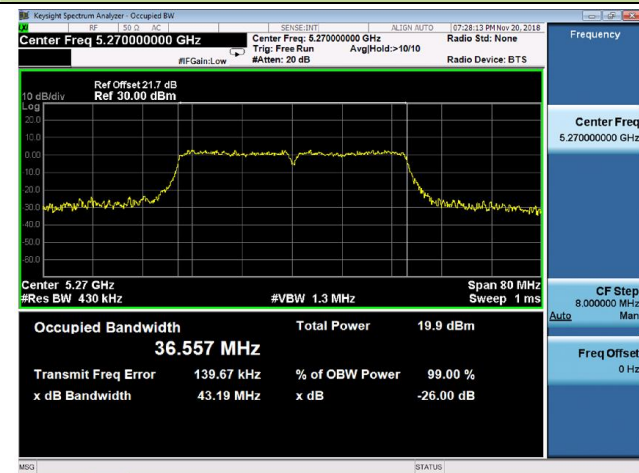

Channel 62 (5310MHz)

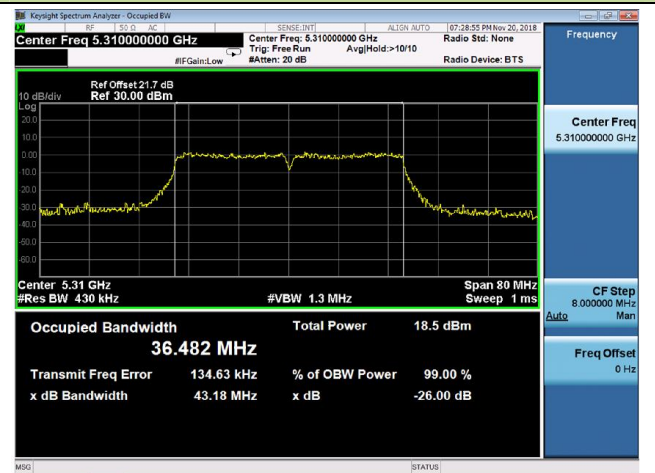


Channel 102 (5510MHz)

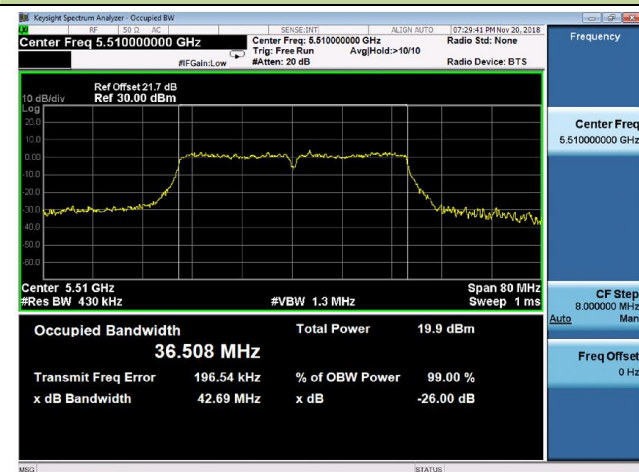


Channel 110 (5550MHz)



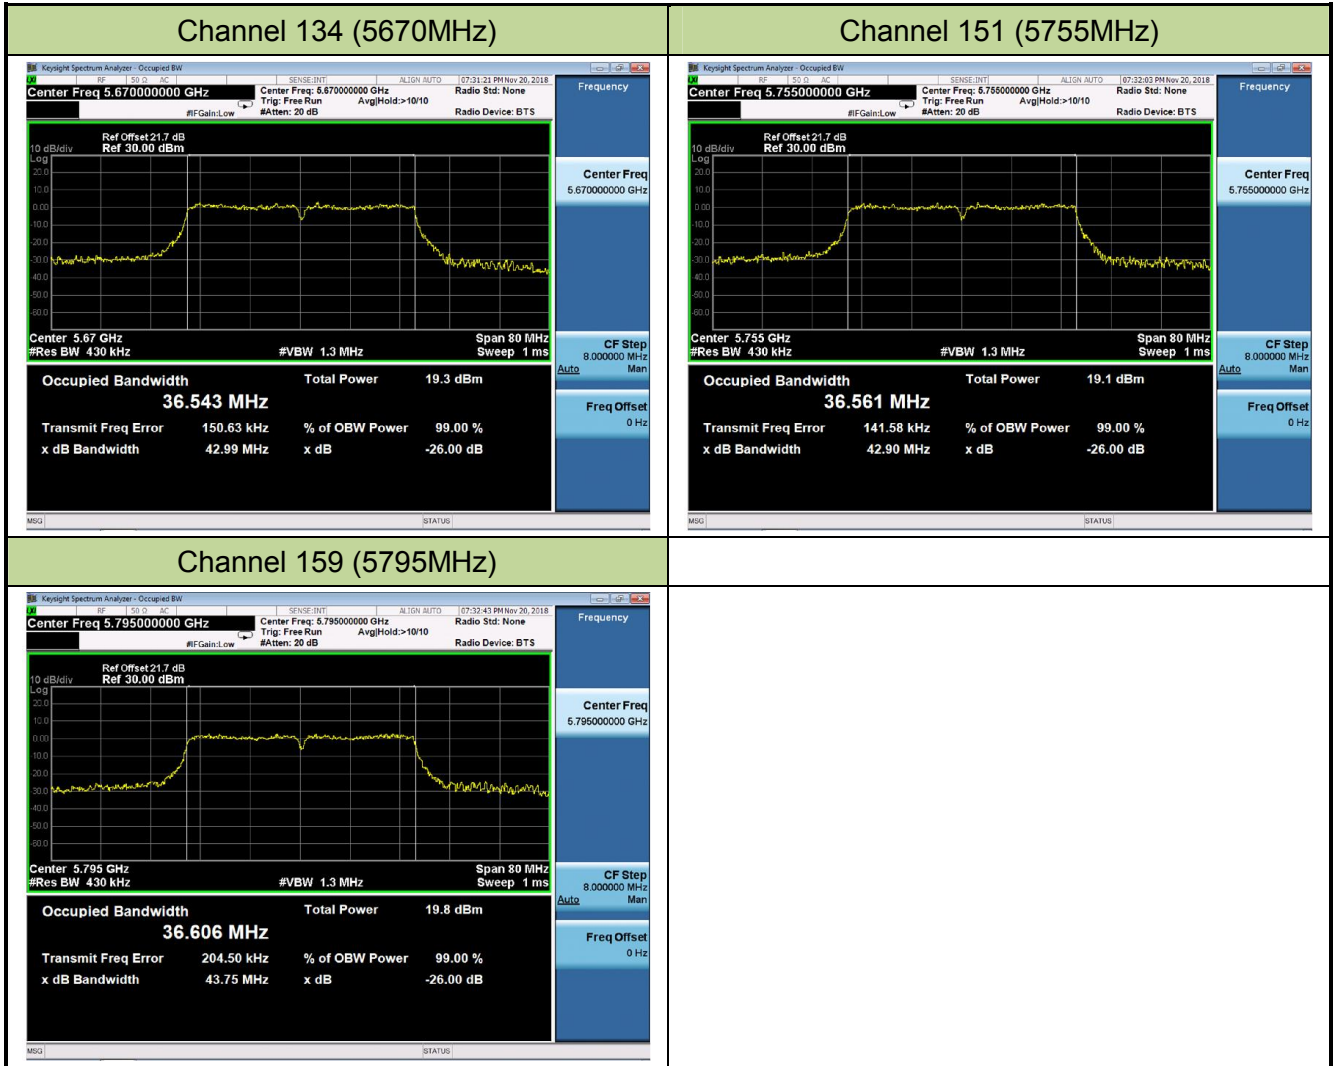


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1


Channel 42 (5210MHz)

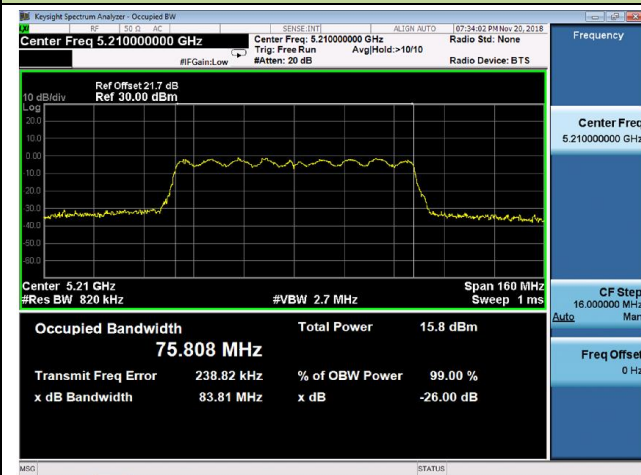


Channel 58 (5290MHz)

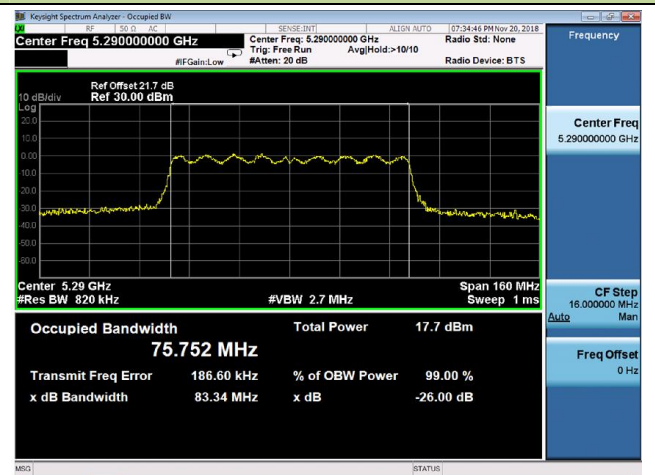

Channel 106 (5530MHz)

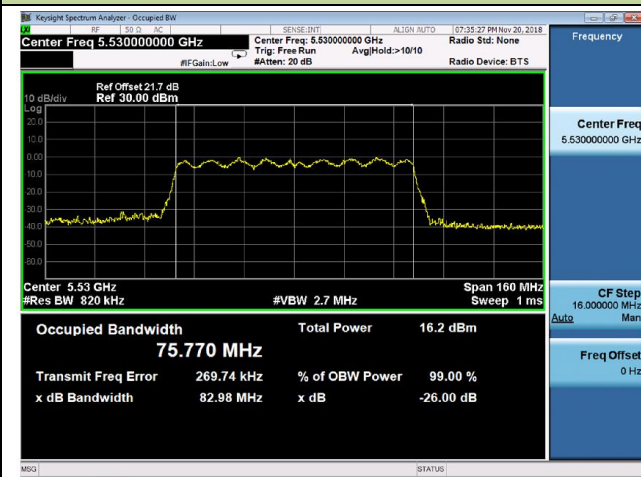

Channel 155 (5775MHz)

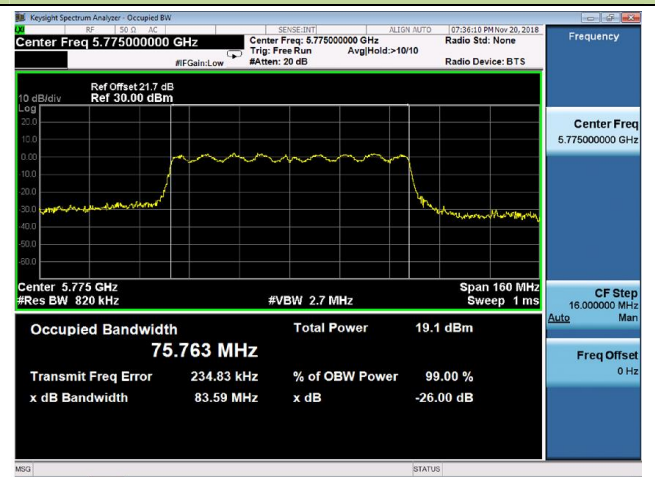

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

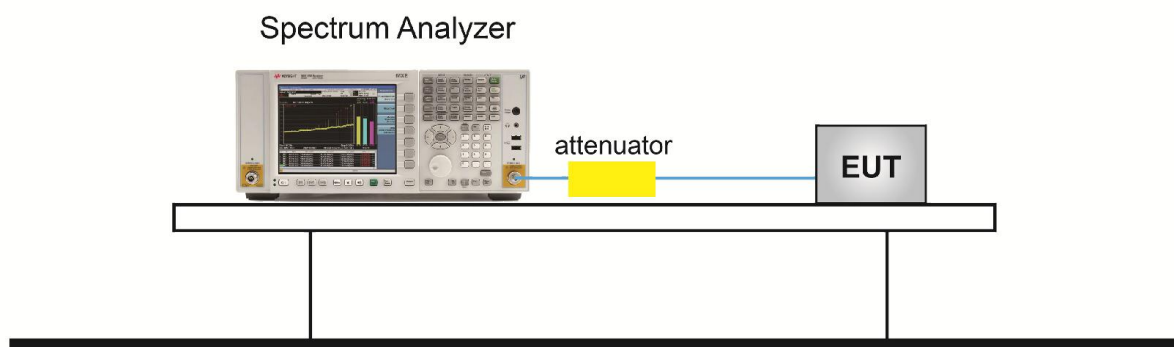

7.3.5. Test Result

Product	AC1300 Mini Wireless MU-MIMO USB Adapter	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	SR1	Test Date	2018/11/20


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	6Mbps	149	5745	16.09	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.33	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.38	≥ 0.5	Pass
802.11n-HT20	MCS8	149	5745	16.95	≥ 0.5	Pass
802.11n-HT20	MCS8	157	5785	17.60	≥ 0.5	Pass
802.11n-HT20	MCS8	165	5825	16.94	≥ 0.5	Pass
802.11n-HT40	MCS8	151	5755	35.55	≥ 0.5	Pass
802.11n-HT40	MCS8	159	5795	36.31	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.56	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.56	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	16.98	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	35.93	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	36.05	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	75.24	≥ 0.5	Pass

802.11a 6dB Bandwidth - Ant 0

Channel 149 (5745MHz)



Channel 157 (5785MHz)

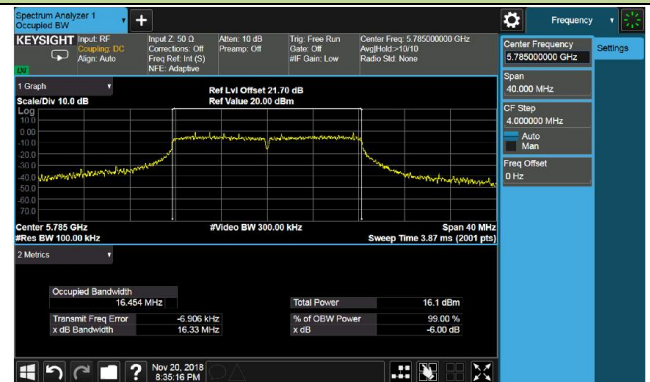

Channel 165 (5825MHz)

