

APPLICATION FOR CERTIFICATION

On Behalf of

TP-LINK Technologies Co., Ltd.

150Mbps Wireless AP/Client Router

Model Number: TL-WR743ND

FCC ID: TE7WR743ND

Prepared for : TP-LINK Technologies Co., Ltd.
1-6F, Building 2, Pingshandayuan Industrial, South Zone,
Taoyuan Street, Nanshan District, Shenzhen, P.R.C.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F10118
Date of Test : May.30~Jun.02, 2010
Date of Report : Jun.07, 2010

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test information	2-2
2.3. Tested Supporting System Details	2-3
2.4. Test Facility	2-4
2.5. Measurement Uncertainty (95% confidence levels, k=2)	2-4
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-1
3.4. Configuration of EUT on Test	3-2
3.5. Operating Condition of EUT.....	3-2
3.6. Test Procedure.....	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup.....	4-1
4.3. Radiated Emission Limit.....	4-2
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results	4-4
5. CONDUCTED SPURIOUS EMISSIONS.....	5-1
5.1. Test Equipment	5-1
5.2. Limit.....	5-1
5.3. Test Procedure.....	5-1
5.4. Test result.....	5-2
6. BAND EDGE COMPLIANCE TEST	6-13
6.1. Test Equipment	6-13
6.2. Limit.....	6-13
6.3. Test Produce	6-13
6.4. Test Results	6-13
7. 6dB Bandwidth Test.....	7-1
7.1. Test Equipment	7-1
7.2. Limit.....	7-1
7.3. Test Procedure.....	7-1
7.4. Test Results	7-1
8. OUTPUT POWER TEST	8-8
8.1. Test Equipment	8-8
8.2. Limit (FCC Part 15C 15.247 b(3)).....	8-8
8.3. Test Procedure.....	8-8
8.4. Test Results	8-9
9. POWER SPECTRAL DENSITY TEST	9-1
9.1. Test Equipment	9-1

9.2. Limit.....9-1

9.3. Test Procedure.....9-1

9.4. Test Results9-2

10. ANTENNA REQUIREMENT 10-9

11. MPE ESTIMATION..... 11-1

11.1. Limit for General Population/ Uncontrolled Exposures11-1

11.2. Estimation Result11-1

12. DEVIATION TO TEST SPECIFICATIONS..... 12-1

13. PHOTOGRAPH OF TEST 13-1

13.1. Photos of Power Line Conducted Emission Test13-1

13.2. Photos of Radiated Emission Test.....13-2

14. PHOTOGRAPH OF EUT 14-1

TEST REPORT CERTIFICATION

Applicant : TP-LINK Technologies Co., Ltd.
Manufacturer : TP-LINK Technologies Co., Ltd.
EUT Description : 150Mbps Wireless AP/Client Router
FCC ID : TE7WR743ND

(A)MODEL NO. : TL-WR743ND

(B)SERIAL NO. : N/A

(C)POWER SUPPLY : DC 9V From Adapter

(D)TEST VOLTAGE : DC 9V From Adapter Input AC 120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 2008

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions.


The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test :

May.30~Jun.02, 2010

Prepared by :


Selina Liu / Assistant

Reviewer :


Jamy Yu / Supervisor

Approved & Authorized Signer :

Ken Lu / Manager



1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10: 2009	PASS
Radiated Emission Test	FCC Part 15: 15.209 ANSI C63.10: 2009	PASS
Band Edge Compliance Test	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Conducted spurious emissions test	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
6dB Bandwidth Test	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Output Power Test	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Power Spectral Density Test	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	: 150Mbps Wireless AP/Client Router
Model Number	: TL-WR743ND
FCC ID	: TE7WR743ND
Operation Frequency	: IEEE 802.11b/g, 802.11n HT20: 2412MHz---2462MHz IEEE802.11n HT40: 2422MHz---2452MHz
Channel Number	: IEEE 802.11b/g, 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20,HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
PK Output Power	: IEEE 802.11b: 22.17dBm IEEE 802.11g: 24.05dBm IEEE 802.11n HT20: 23.92dBm IEEE 802.11n HT40: 22.04dBm
Antenna and Gain	: One Dipole antenna, PK gain 5dBi One Integrated PCB antenna only used for Receive.
Applicant	: TP-LINK Technologies Co., Ltd. 1-6F, Building 2, Pingshandayuan Industrial, South Zone, Taoyuan Street, Nanshan District, Shenzhen, P.R.C.
Manufacturer	: TP-LINK Technologies Co., Ltd. 1-6F, Building 2, Pingshandayuan Industrial, South Zone, Taoyuan Street, Nanshan District, Shenzhen, P.R.C.
Power Adapter	: Manufacturer: LEADER ELECTRONICS INC. M/N: MU08-6090085-A1 Cable: Unshielded, Undetachable, 1.5m
Date of Test	: May.30~Jun.02, 2010
Date of Receipt	: May.24, 2010
Sample Type	: Prototype production

2.2.Test information

The test software “art.exe” was used to control EUT work in Continuous TX(100% duty cycle) mode, and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	11	Low :CH1	2412
	11	Middle: CH6	2437
	11	High: CH11	2462
IEEE 802.11g	12	Low :CH1	2412
	12	Middle: CH6	2437
	12	High: CH11	2462
IEEE 802.11n HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11n HT40	13.5	Low :CH1	2422
	13.5	Middle: CH4	2437
	13.5	High: CH7	2452
Note1: According to exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.			

2.3. Tested Supporting System Details

2.3.1. Notebook

M/N	:	PP09S
S/N	:	N/A
Manufacturer	:	DELL
Power Adaptor	:	Manufacturer: DELL, M/N: LA65NS1-00 Cable: Unshielded, Detachable, 4.0m (Bond one ferrite core)

2.3.2. Cables

LAN Cable	:	Unshielded, Detachable 10m
-----------	---	----------------------------

2.4. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Mar.31, 2009 File on Federal
Communication Commission
Registration Number: 90454

3m & 10m Anechoic Chamber : Dec. 30, 2009 File on Federal
Communication Commission
Registration Number: 794232

EMC Lab. : Accredited by DATech, German
Registration Number: DAT-P-091/99-01
Feb. 02, 2009

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Apr. 01, 2010

2.5. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.40dB
Uncertainty for Radiation Emission test in 3m chamber	3.82 dB (Polarize: V)
	4.32 dB (Polarize: H)
Uncertainty for Radiated Spurious Emission test in RF chamber	2.70 dB(Bilog antenna 30M~1000MHz)
	2.27 dB(Horn antenna 1000M~25000MHz)
Uncertainty for Conduction Spurious emission test	2.12 dB
Uncertainty for Output power test	0.97 dB
Uncertainty for Power density test	2.21 dB
Uncertainty for Temperature and humidity test	2%
	1°C
Uncertainty for Frequency range test	1×10^{-9}
Uncertainty for Bandwidth test	1×10^{-9}
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%


3. POWER LINE CONDUCTED EMISSION TEST

3.1.Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Dec.18, 09	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Mar.30, 10	1 Year
3.	Terminator	Hubersuhner	50Ω	No. 1	May.08, 10	1 Year
4.	RF Cable	Fujikura	3D-2W	LISN Cable 1#	May.08, 10	1Year
5.	Coaxial Switch	Anritsu	MP59B	M55367	May.08, 10	1 Year
6.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100341	May.08, 10	1 Year

3.2.Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators

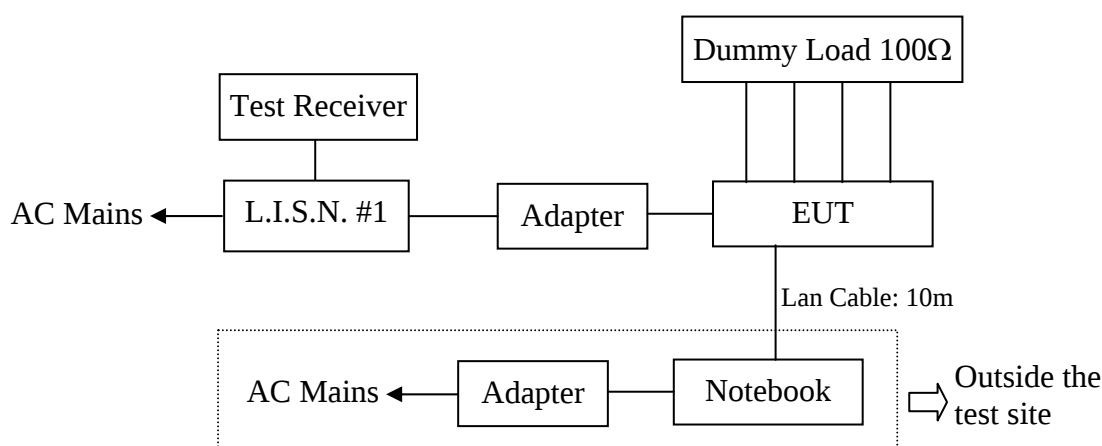

(EUT: 150Mbps Wireless AP/Client Router)

3.3.Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. 150Mbps Wireless AP/Client Router (EUT)

Model Number : TL-WR743ND

Serial Number : N/A

3.4.2. Support Equipment : As Tested Supporting System Detail, in Section 2.3.

3.5.Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turned on the power of all equipment.

3.5.3. Notebook run test software to control EUT work in Tx mode.

3.6.Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via Adapter connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2009 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

The test result are reported on Section 3.7.,

3.7.Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)




NO.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park
Nantou, Shenzhen,Guang dong, China.
Tel:+86-755-26639495
Fax:+86-755-26632877
Postcode:518057

Data: 6

File: D:\DATA\2010 REPORT\TP-LINK\ACS10Q0937.EM6 (11)

Date: 2010-05-31

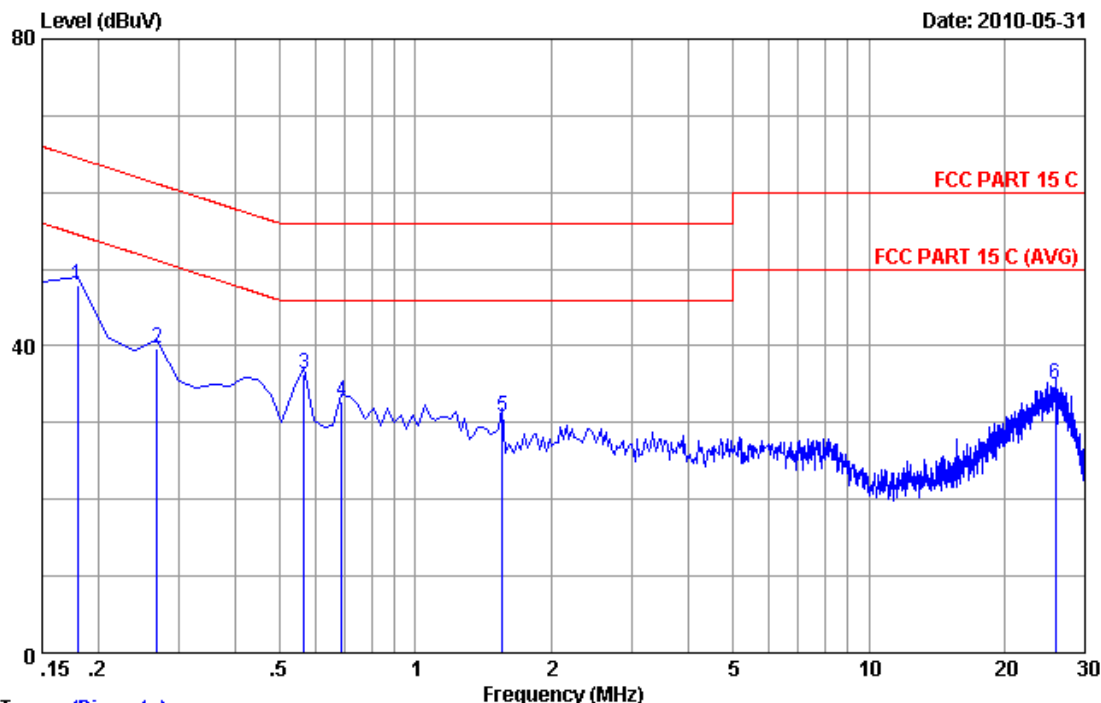

Trace: (Discrete)

Site no : Audix No.1 Conduction Data no : 6
Dis./Ant. : ** 2009 ESH2-Z5 LINE
Limit : FCC PART 15 C
Env./Ins. : Temp:23'C Humi:54% Engineer : Leo-Li
EUT : 150Mbps Wireless AP/Client Router
Power Rating : DC 9V From Adapter Input AC 120V/60Hz
Test Mode : TX Mode
M/N : M/N:TL-WR743ND

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17985	0.19	9.88	37.92	47.99	64.49	16.50	QP
2	0.26940	0.18	9.88	29.63	39.69	61.14	21.45	QP
3	0.56790	0.18	9.89	26.18	36.25	56.00	19.75	QP
4	0.68730	0.19	9.89	22.61	32.69	56.00	23.31	QP
5	1.553	0.21	9.89	20.73	30.83	56.00	25.17	QP
6	25.791	0.68	10.05	24.16	34.89	60.00	25.11	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.




NO.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park
Nantou, Shenzhen,Guang dong, China.
Tel:+86-755-26639495
Fax:+86-755-26632877
Postcode:518057

Data: 5

File: D:\DATA\2010 REPORT\TP-LINK\ACS10Q0937.EM6 (11)

Date: 2010-05-31

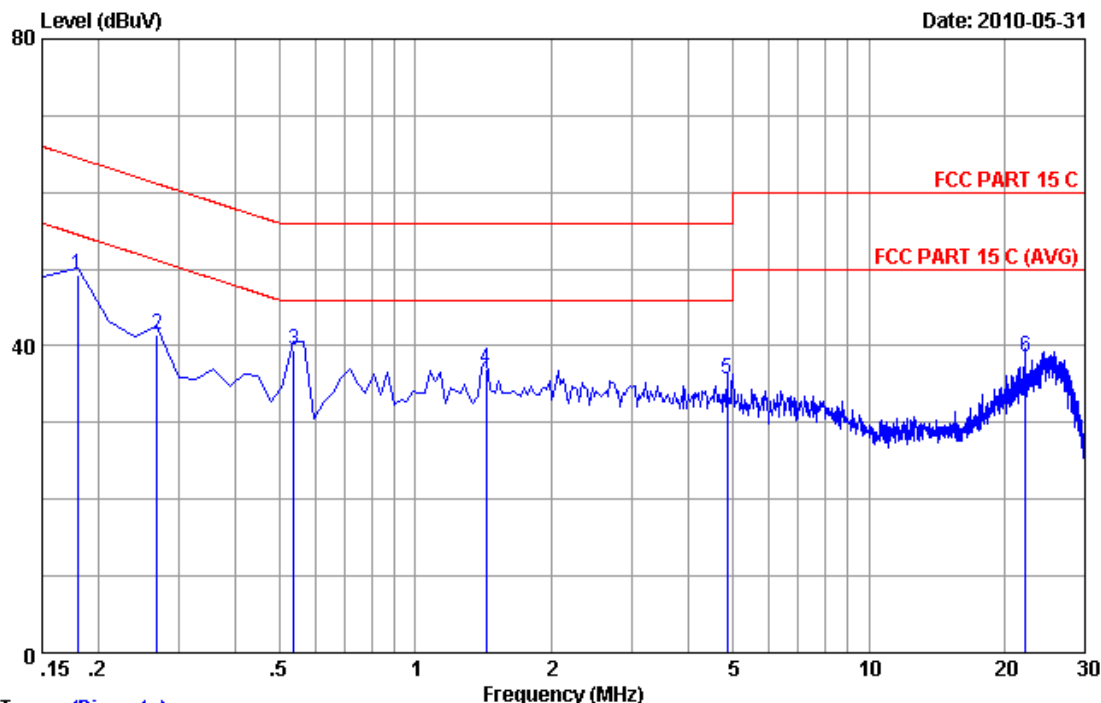

Trace: (Discrete)

Site no : Audix No.1 Conduction Data no : 5
 Dis./Ant. : ** 2009 ESH2-Z5 NEUTRAL
 Limit : FCC PART 15 C
 Env./Ins. : Temp:23'C Humi:54% Engineer : Leo-Li
 EUT : 150Mbps Wireless AP/Client Router
 Power Rating : DC 9V From Adapter Input AC 120V/60Hz
 Test Mode : TX Mode
 M/N : M/N:TL-WR743ND

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17985	0.20	9.88	39.08	49.16	64.49	15.33	QP
2	0.26940	0.20	9.88	31.42	41.50	61.14	19.64	QP
3	0.53805	0.20	9.89	29.36	39.45	56.00	16.55	QP
4	1.434	0.20	9.89	27.00	37.09	56.00	18.91	QP
5	4.866	0.28	9.91	25.36	35.55	56.00	20.45	QP
6	22.149	0.40	10.03	28.23	38.66	60.00	21.34	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Dec.05,09	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 10	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 10	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 10	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Dec.14, 09	1 Year
6	RF Cable	MIYAZAKI	8D-FB	3# Chamber No.1	May.08, 10	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 10	1 Year

Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 10	1 Year
2	Horn Antenna	EMCO	3115	9510-4580	Nov.19, 09	1.5 Year
3	Horn Antenna	EMCO	3115	9607-4877	Nov. 25, 09	1.5 Year
4	Amplifier	Agilent	8449B	3008A00863	May.08, 10	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08, 10	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08, 10	1 Year
7	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	May.08, 10	1 Year


4.2. Block Diagram of Test Setup

4.2.1. Block diagram of connection between the EUT and simulators

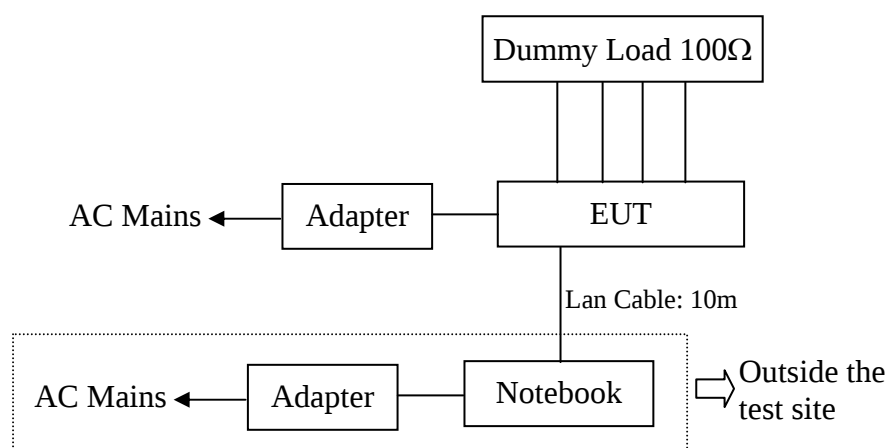

(EUT: 150Mbps Wireless AP/Client Router)

4.2.2. In Anechoic Chamber

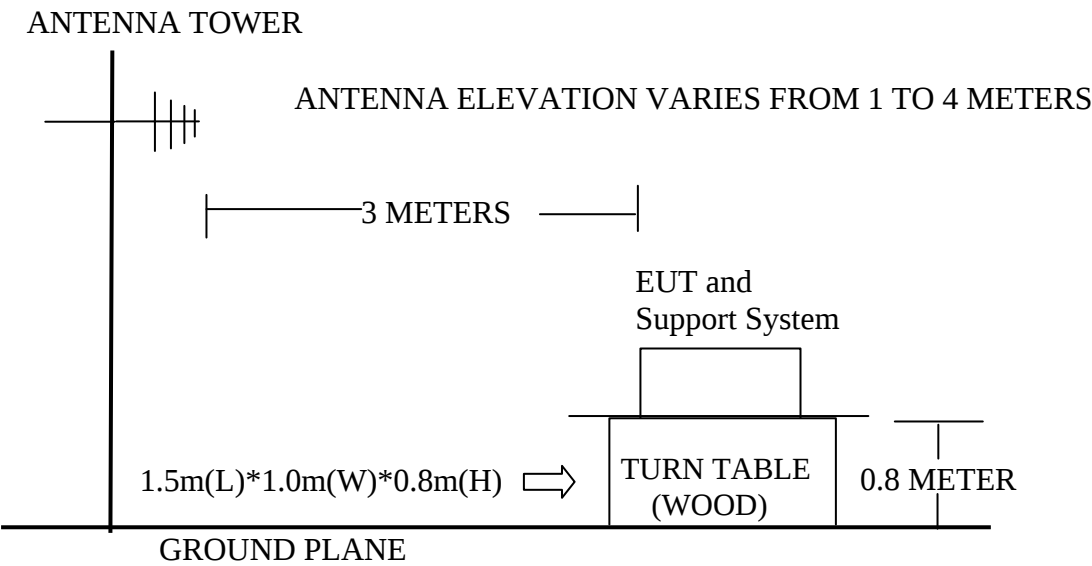

4.3. Radiated Emission Limit

4.3.1. 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark :
- (1) Emission level dBμV = 20 log Emission level μV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. 150Mbps Wireless AP/Client Router (EUT)

Model Number : TL-WR743ND
Serial Number : N/A

4.4.2. Support Equipment : As Tested Supporting System Detail, in Section 2.3.

4.5.Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turned on the power of all equipment.

4.5.3. Notebook run test software to control EUT work in test mode.

4.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7.Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Frequency: 30MHz~1GHz




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 2

File: D:\2010 Repot Data\T\TP_LINK\ACS10Q0937.EM6 (2)

Date: 2010-05-25

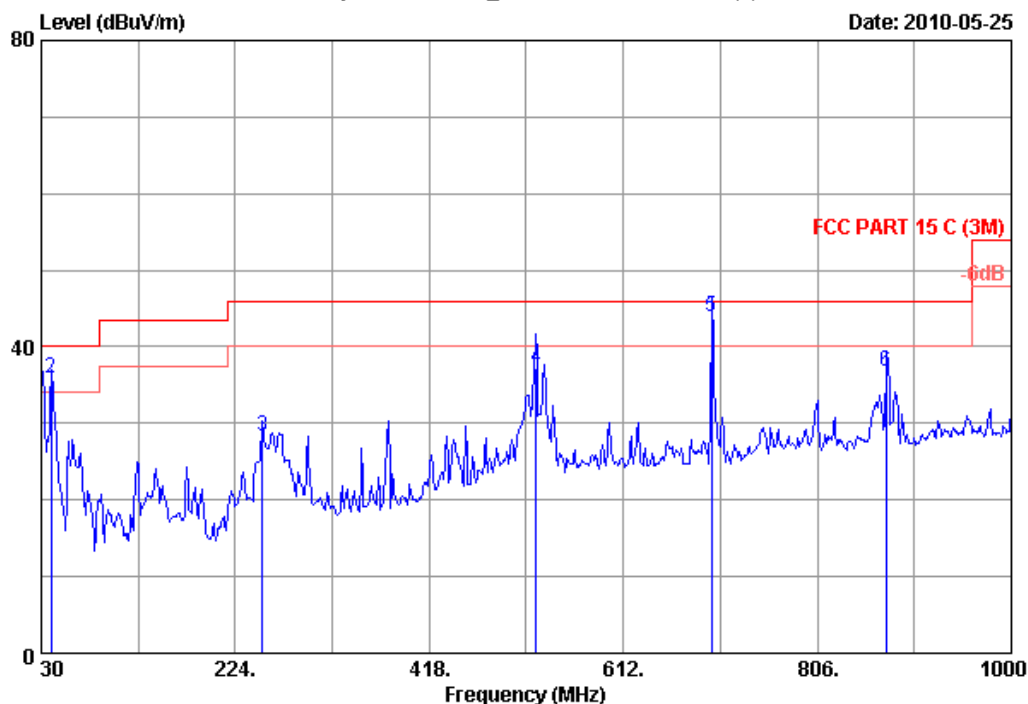

Site no. : 3m Chamber Data no. : 2
Dis. / Ant. : 3m 2009 CBL6111C Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 24°C/56% Engineer : Leo-Li
EUT : 150Mbps Wireless AP/Client Router
Power Rating : DC 9V From Adapter Input AC 120V/60Hz
Test Mode : Tx Mode
TL-WR743ND

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	20.00	0.52	15.24	35.76	40.00	4.24	QP
2	39.700	14.50	0.58	20.83	35.91	40.00	4.09	QP
3	251.160	12.90	1.64	13.72	28.26	46.00	17.74	QP
4	524.970	18.35	2.31	16.50	37.16	46.00	8.84	QP
5	700.000	20.80	2.80	20.20	43.80	46.00	2.20	QP
6	875.040	22.80	3.15	10.90	36.85	46.00	9.15	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 1

File: D:\2010 Repot Data\T\TP_LINK\ACS10Q0937.EM6 (2)

Date: 2010-05-25

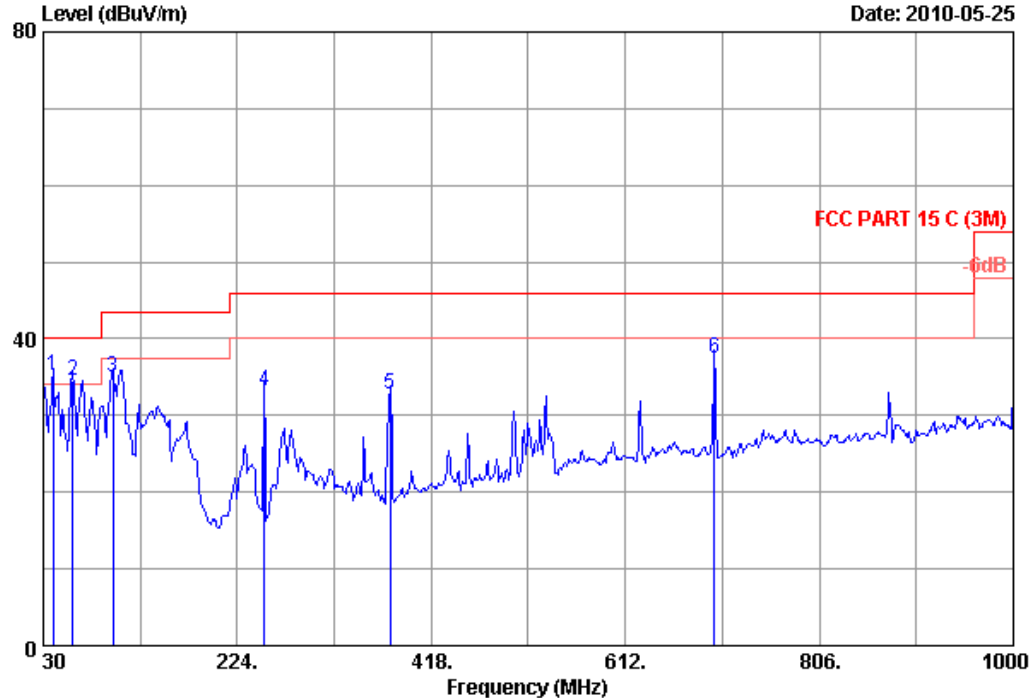

Site no.	: 3m Chamber	Data no.	: 1
Dis. / Ant.	: 3m 2009 CBL6111C	Ant. pol.	: VERTICAL
Limit	: FCC PART 15 C (3M)		
Env. / Ins.	: 24°C/56%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless AP/Client Router		
Power Rating	: DC 9V From Adapter Input AC 120V/60Hz		
Test Mode	: Tx Mode		
	TL-WR743ND		


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission			Remark
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	39.700	14.50	0.58	20.04	35.12	40.00	4.88	QP
2	59.100	6.22	0.70	27.64	34.56	40.00	5.44	QP
3	99.840	10.40	0.90	23.73	35.03	43.50	8.47	QP
4	251.160	12.90	1.64	18.76	33.30	46.00	12.70	QP
5	377.260	15.64	1.88	15.27	32.79	46.00	13.21	QP
6	701.240	20.79	2.80	13.87	37.46	46.00	8.54	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

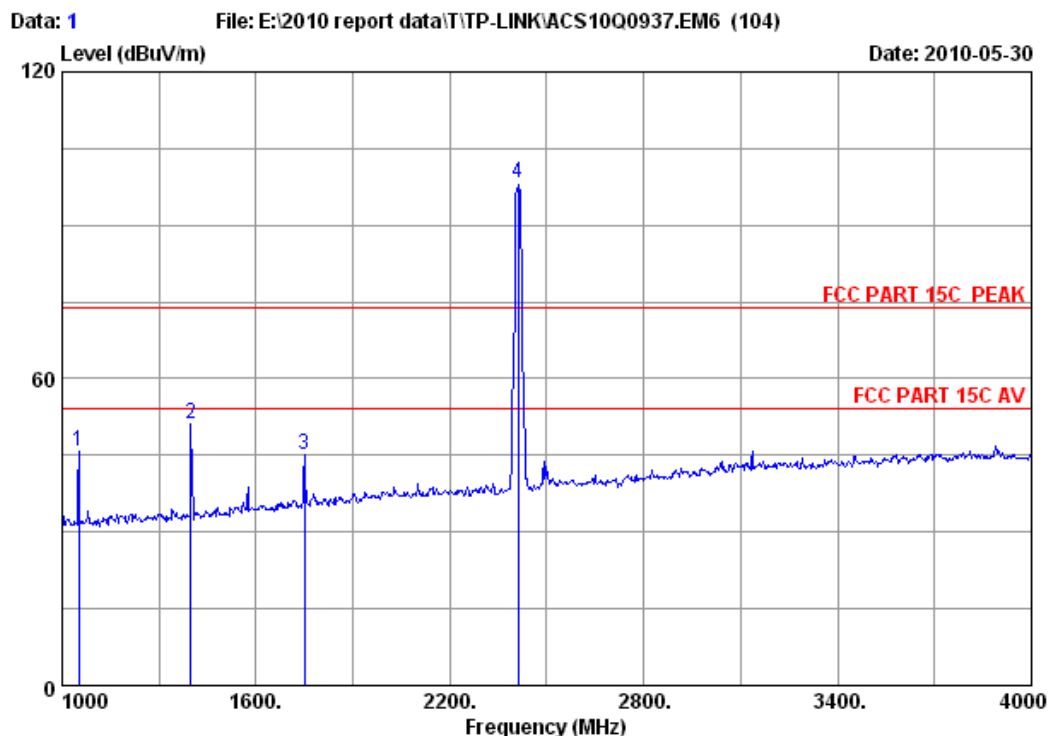

Site no. : 3m Chamber Data no. : 1
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : TL-WR743ND

	Ant.	Cable	Amp.		Emission				
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBUV)	(dBUV/m)	(dBUV/m)	(dB)		
1 1051.000	25.50	5.60	37.34	52.01	45.77	74.00	28.23	Peak	
2 1399.000	26.19	6.49	36.69	55.18	51.17	74.00	22.83	Peak	
3 1750.000	27.80	7.33	36.29	46.36	45.20	74.00	28.80	Peak	
4 2412.000	29.45	8.72	35.95	95.92	98.14	74.00	-24.14	Peak	


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 2 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

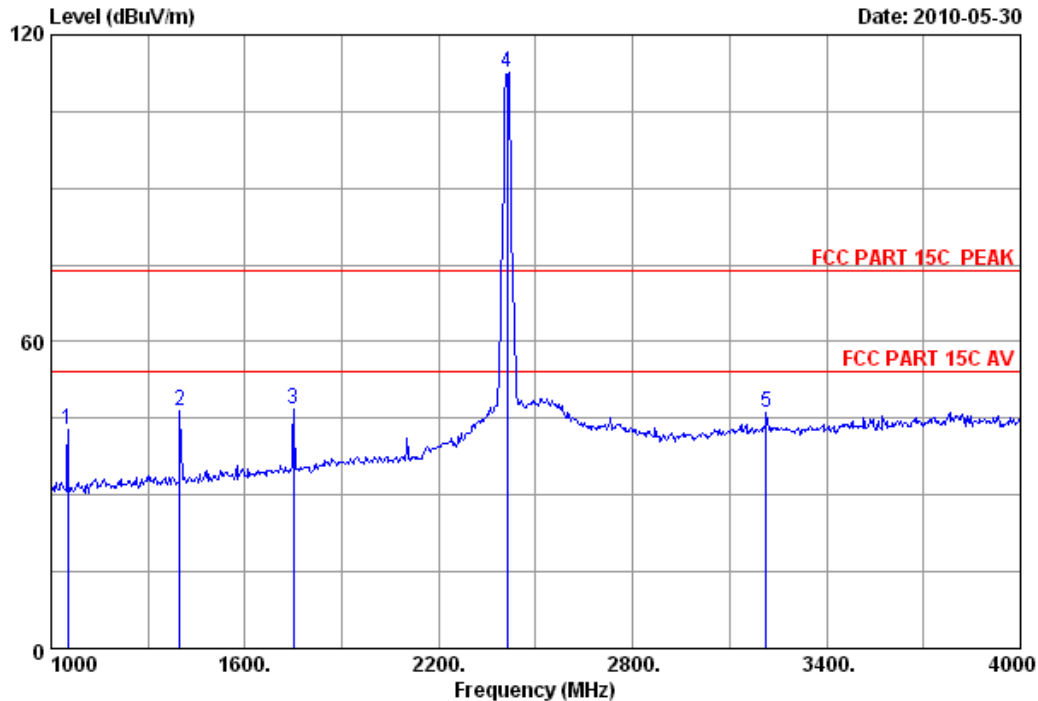

Site no. : 3m Chamber Data no. : 2
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	1051.000	25.50	5.60	37.34	48.89	42.65	74.00	31.35	Peak
2	1399.000	26.19	6.49	36.69	50.40	46.39	74.00	27.61	Peak
3	1750.000	27.80	7.33	36.29	47.85	46.69	74.00	27.31	Peak
4	2412.000	29.45	8.72	35.95	110.42	112.64	74.00	-38.64	Peak
5	3214.000	32.54	10.21	35.86	39.12	46.01	74.00	27.99	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 3 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

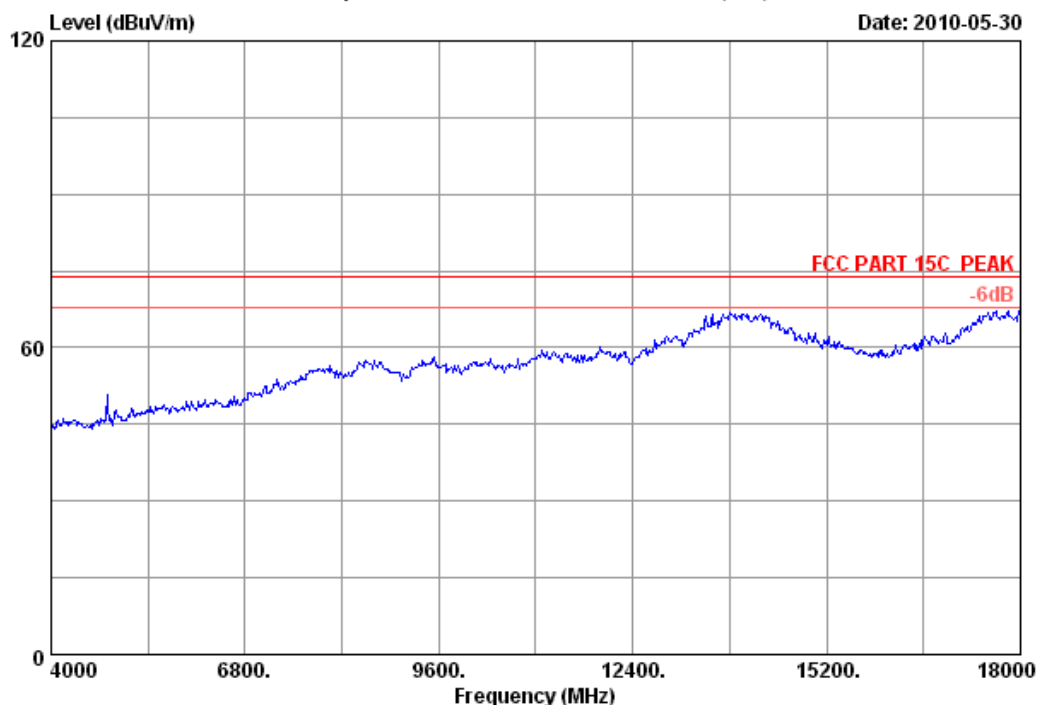


Site no.	: 3m Chamber	Data no.	: 3
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH1 2412MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 4 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

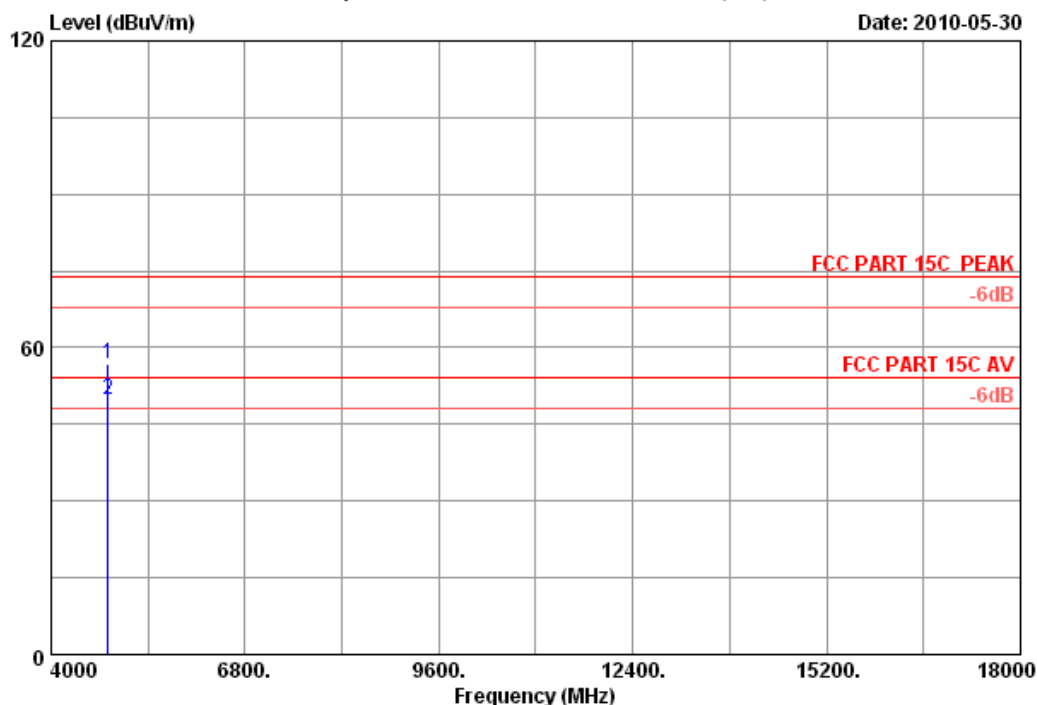

Site no. : 3m Chamber Data no. : 4
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4824.000	34.32	12.38	35.25	45.44	56.89	74.00	17.11	Peak
2	4824.000	34.32	12.38	35.25	38.52	49.97	54.00	4.03	Average


Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 5 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

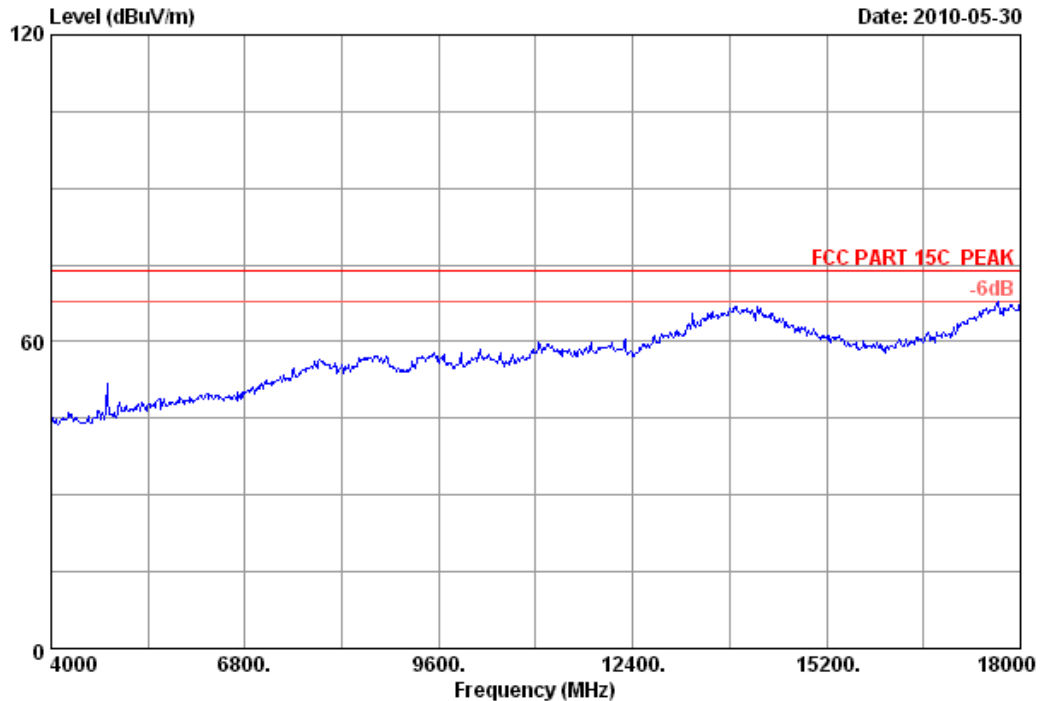


Site no.	: 3m Chamber	Data no.	: 5
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH1 2412MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 6 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

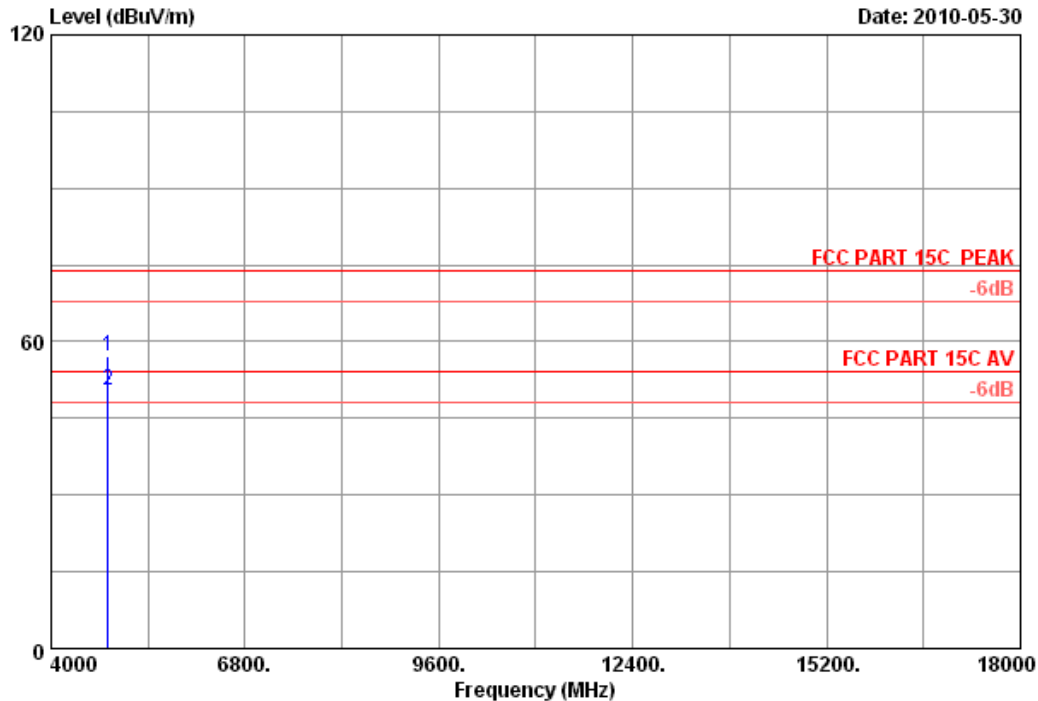

Site no. : 3m Chamber Data no. : 6
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	34.32	12.38	35.25	45.67	57.12	74.00	16.88	Peak
2	4824.000	34.32	12.38	35.25	39.00	50.45	54.00	3.55	Average


Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 7 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

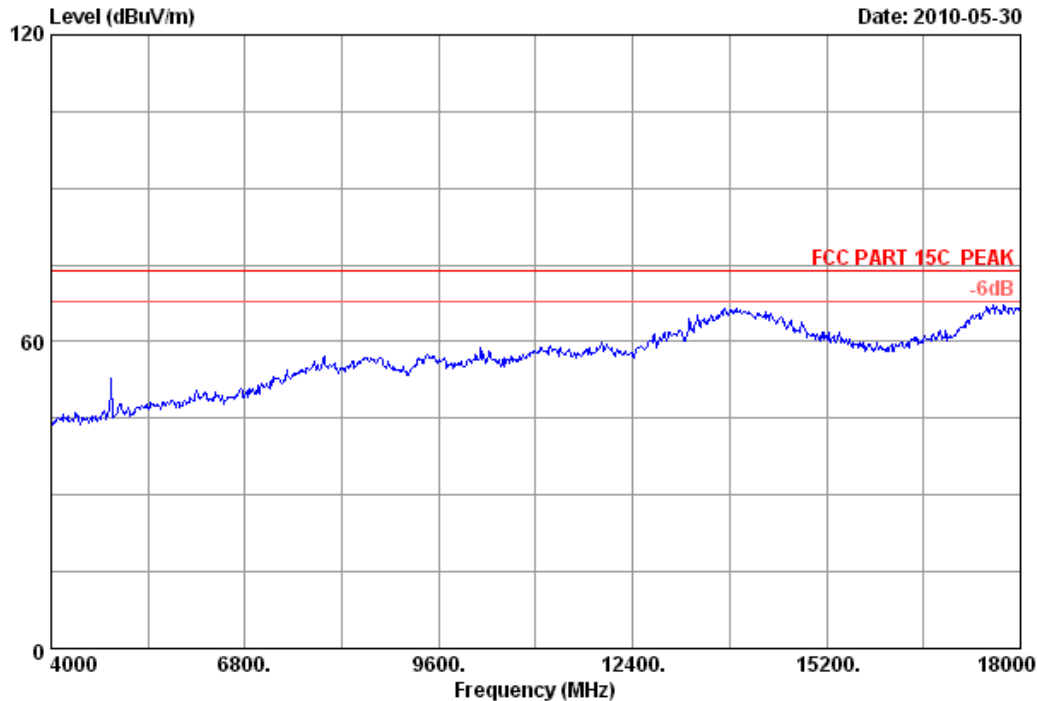


Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH6 2437MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 8 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

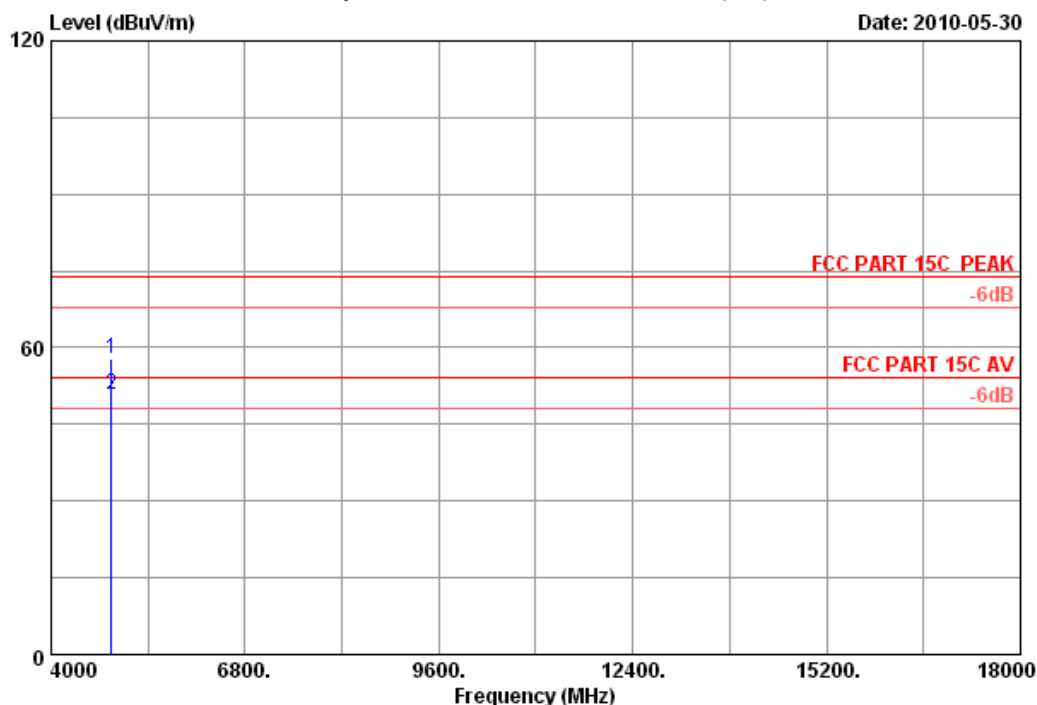

Site no. : 3m Chamber Data no. : 8
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH6 2437MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.41	12.44	35.36	46.47	57.96	74.00	16.04	Peak
2	4874.000	34.41	12.44	35.36	39.41	50.90	54.00	3.10	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 9 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

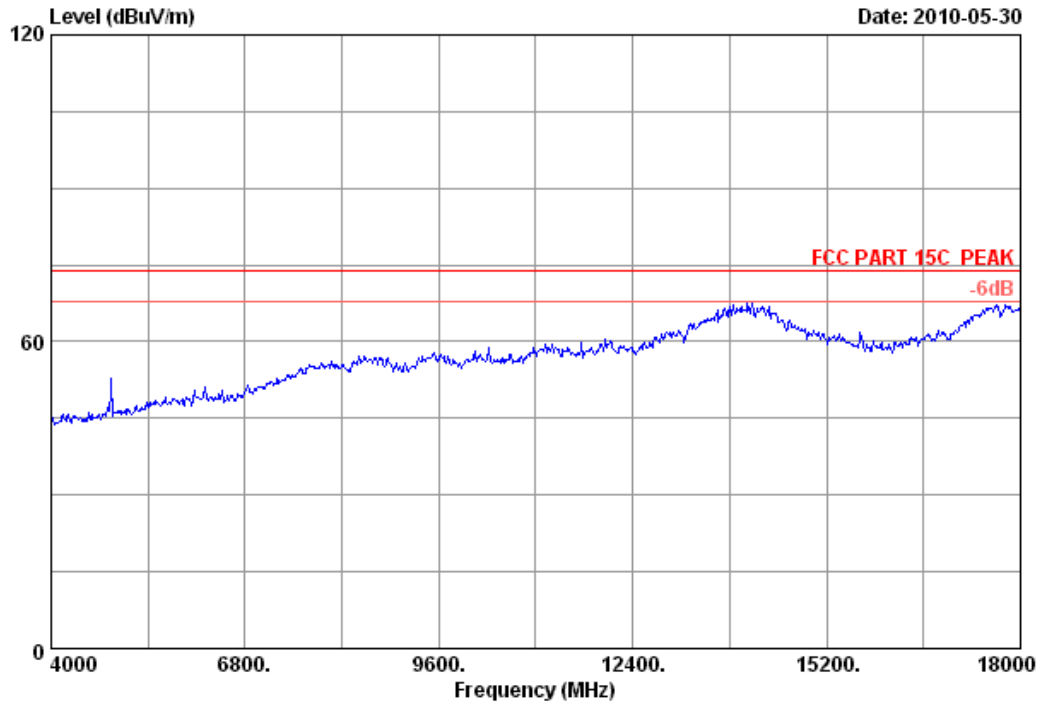


Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH6 2437MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 10 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

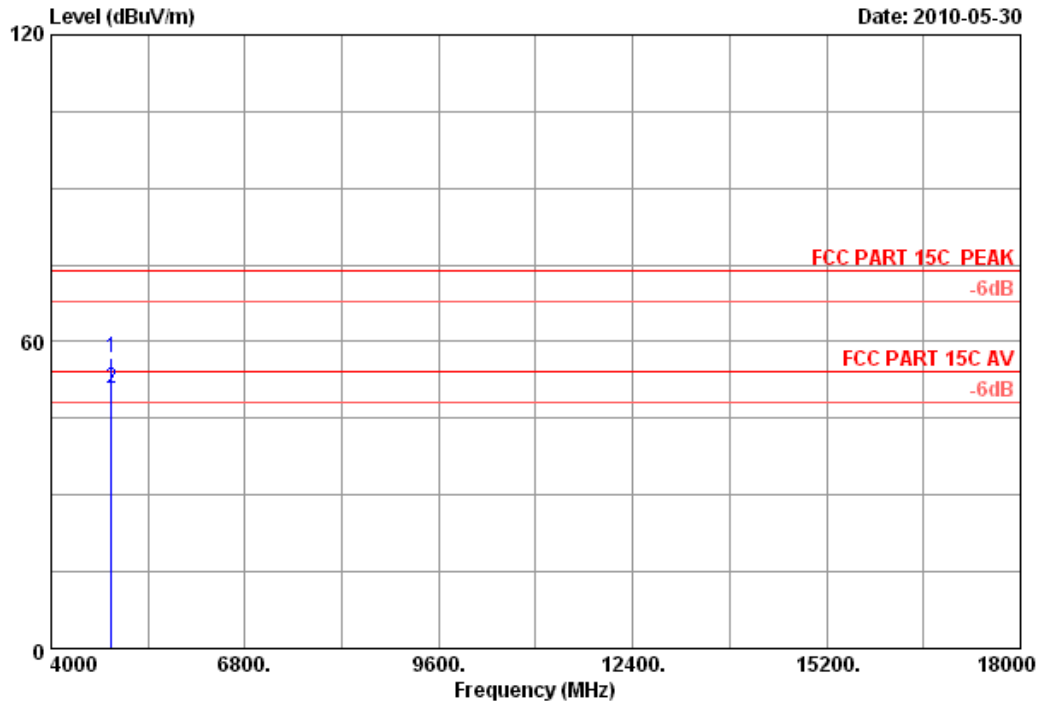

Site no.	: 3m Chamber	Data no.	: 10
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH6 2437MHz Tx		
M/N	: TL-WR743ND		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4874.000	34.41	12.44	35.36	45.25	56.74	74.00	17.26	Peak
2	4874.000	34.41	12.44	35.36	39.40	50.89	54.00	3.11	Average

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 11

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

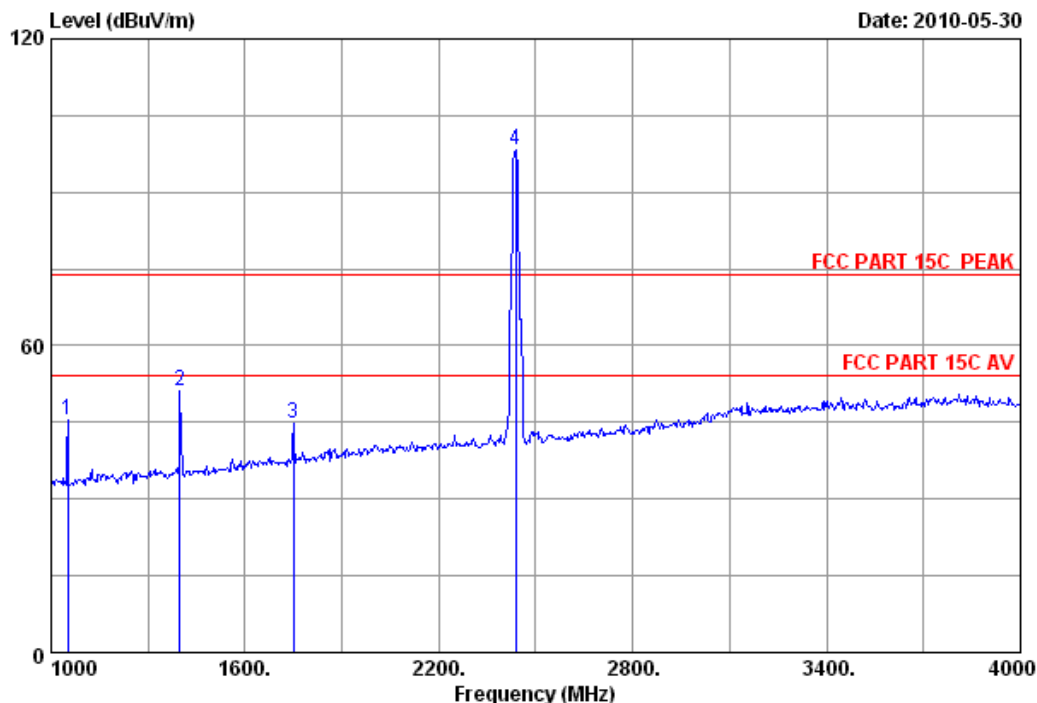

Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH6 2437MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.85	45.61	74.00	28.39	Peak
2	1399.000	26.19	6.49	36.69	55.05	51.04	74.00	22.96	Peak
3	1750.000	27.80	7.33	36.29	45.79	44.63	74.00	29.37	Peak
4	2437.000	29.47	8.77	36.06	96.08	98.26	74.00	-24.26	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 12 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

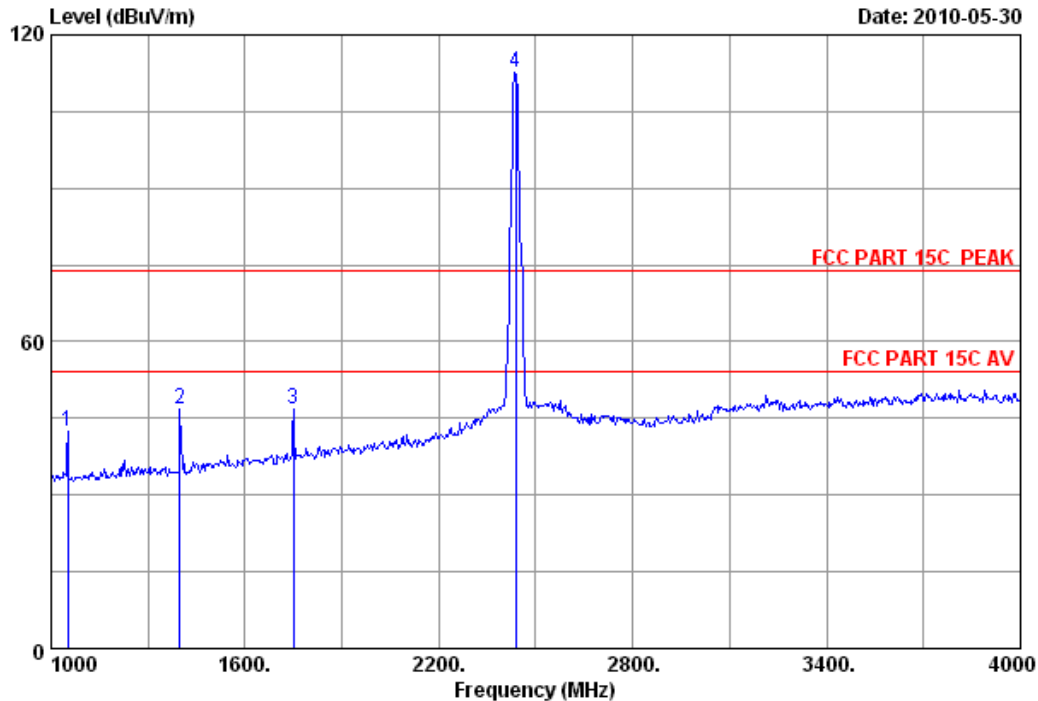

Site no. : 3m Chamber Data no. : 12
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH6 2437MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	1051.000	25.50	5.60	37.34	48.61	42.37	74.00	31.63	Peak
2	1399.000	26.19	6.49	36.69	50.81	46.80	74.00	27.20	Peak
3	1750.000	27.80	7.33	36.29	47.89	46.73	74.00	27.27	Peak
4	2437.000	29.47	8.77	36.06	110.43	112.61	74.00	-38.61	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 13 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

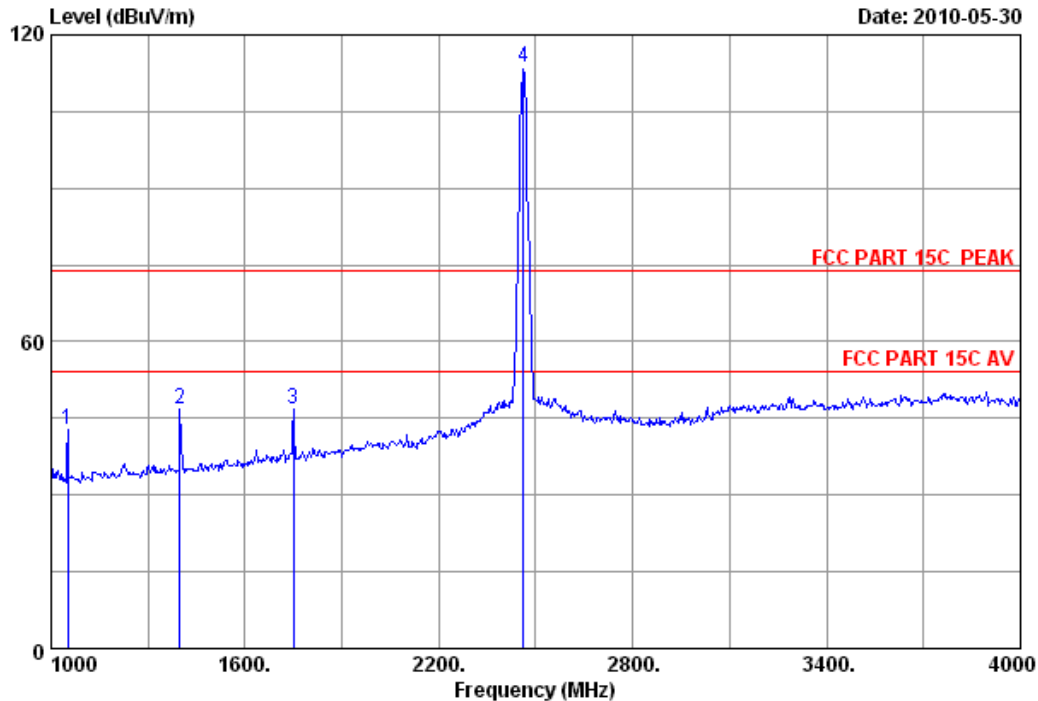

Site no. : 3m Chamber Data no. : 13
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	1051.000	25.50	5.60	37.34	49.01	42.77	74.00	31.23	Peak
2	1399.000	26.19	6.49	36.69	50.95	46.94	74.00	27.06	Peak
3	1750.000	27.80	7.33	36.29	47.86	46.70	74.00	27.30	Peak
4	2462.000	29.48	8.82	36.02	111.30	113.58	74.00	-39.58	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 14 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

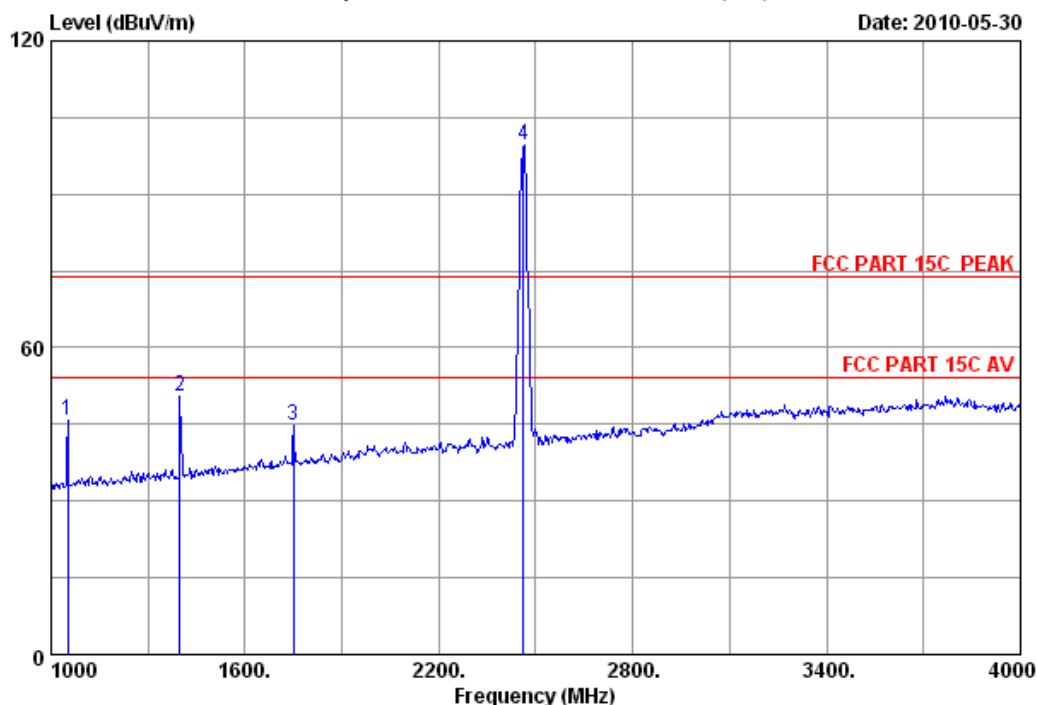

Site no. : 3m Chamber Data no. : 14
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	1051.000	25.50	5.60	37.34	51.91	45.67	74.00	28.33	Peak
2	1399.000	26.19	6.49	36.69	54.64	50.63	74.00	23.37	Peak
3	1750.000	27.80	7.33	36.29	45.94	44.78	74.00	29.22	Peak
4	2462.000	29.48	8.82	36.02	97.41	99.69	74.00	-25.69	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 15

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

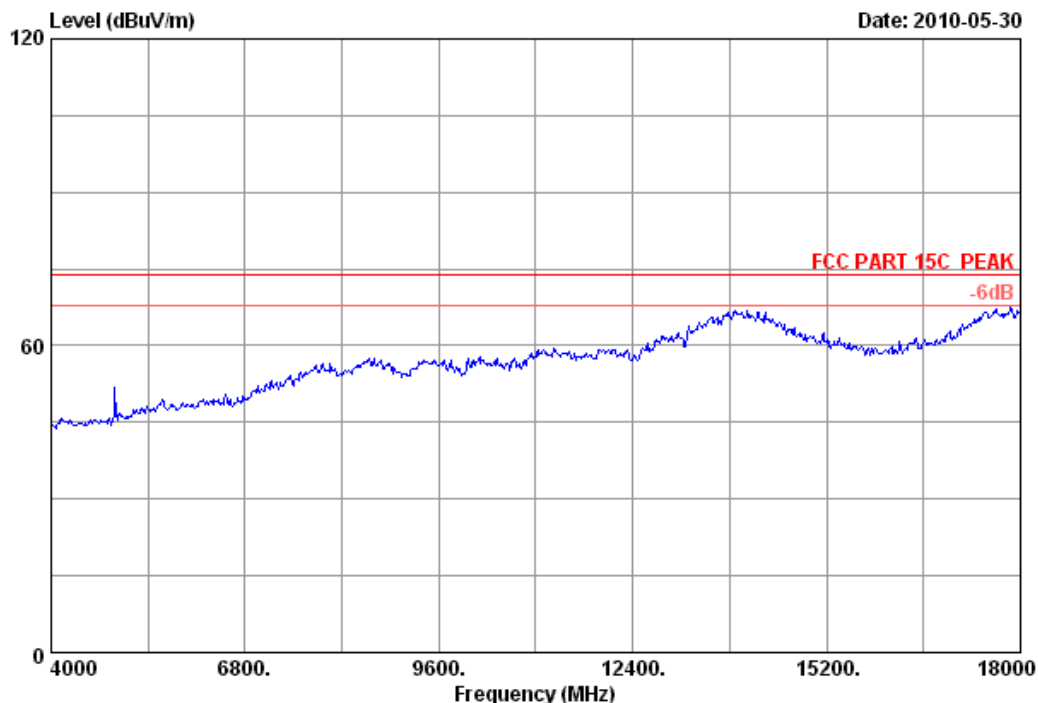


Site no.	: 3m Chamber	Data no.	: 15
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH11 2462MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 16 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

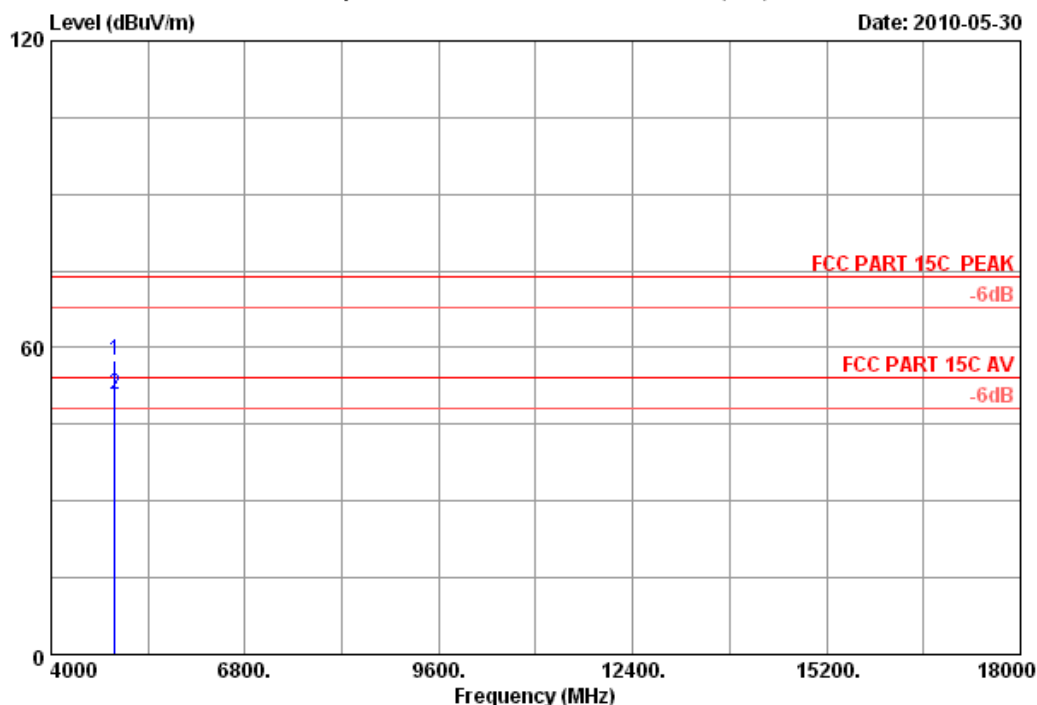

Site no. : 3m Chamber Data no. : 16
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH11 2462MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	12.50	35.34	45.77	57.42	74.00	16.58	Peak
2	4924.000	34.49	12.50	35.34	39.29	50.94	54.00	3.06	Average

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 17

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

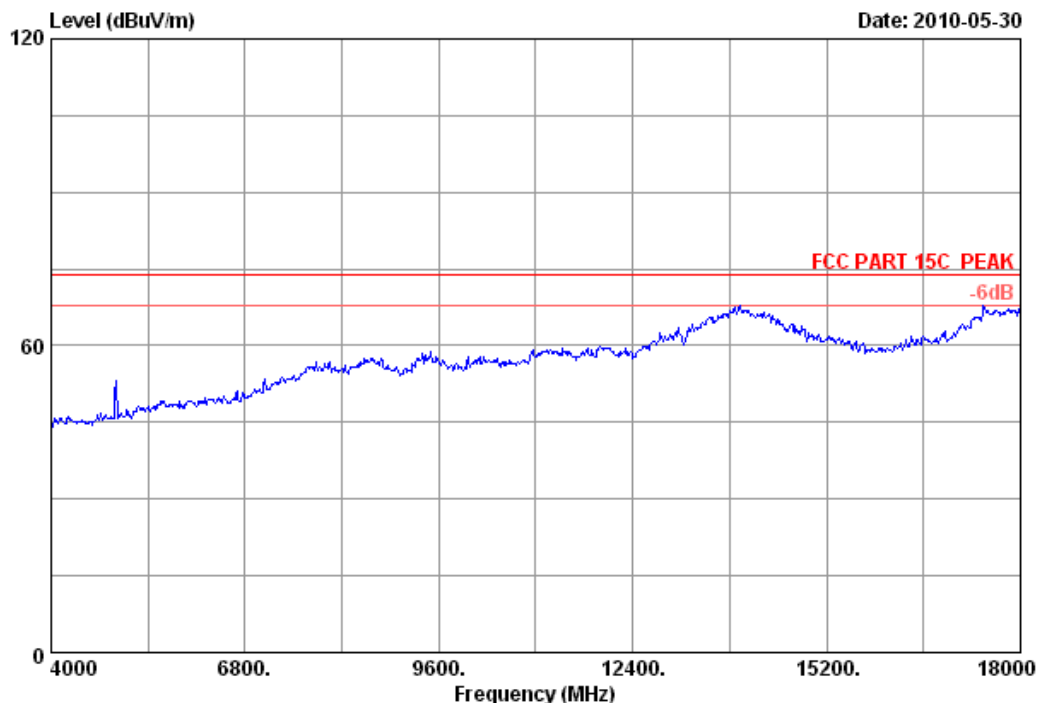


Site no.	: 3m Chamber	Data no.	: 17
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH11 2462MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 18 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

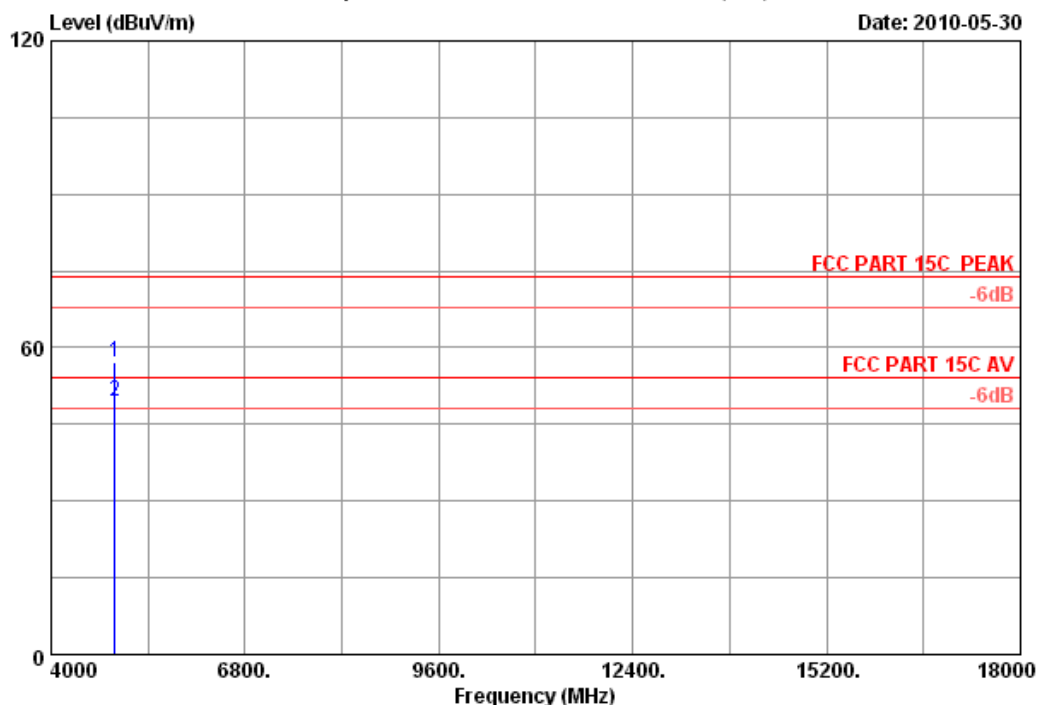

Site no. : 3m Chamber Data no. : 18
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	34.49	12.50	35.34	45.52	57.17	74.00	16.83	Peak
2	4924.000	34.49	12.50	35.34	37.73	49.38	54.00	4.62	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 19

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

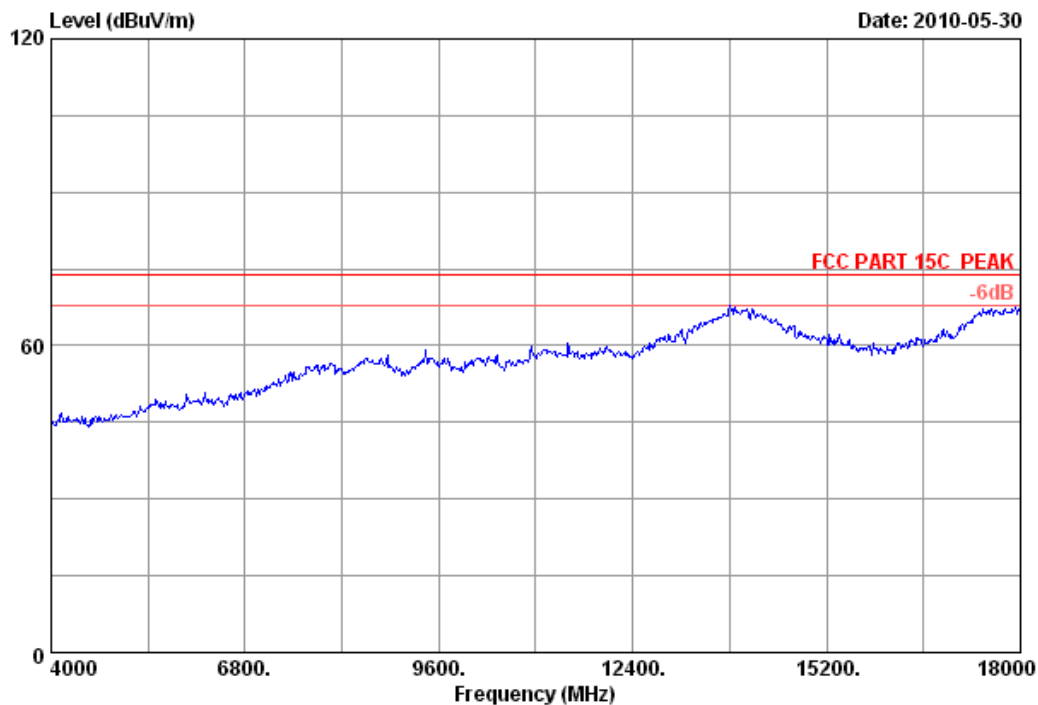

Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH1 2412MHz Tx		
M/N	: TL-WR743ND		




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 20

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

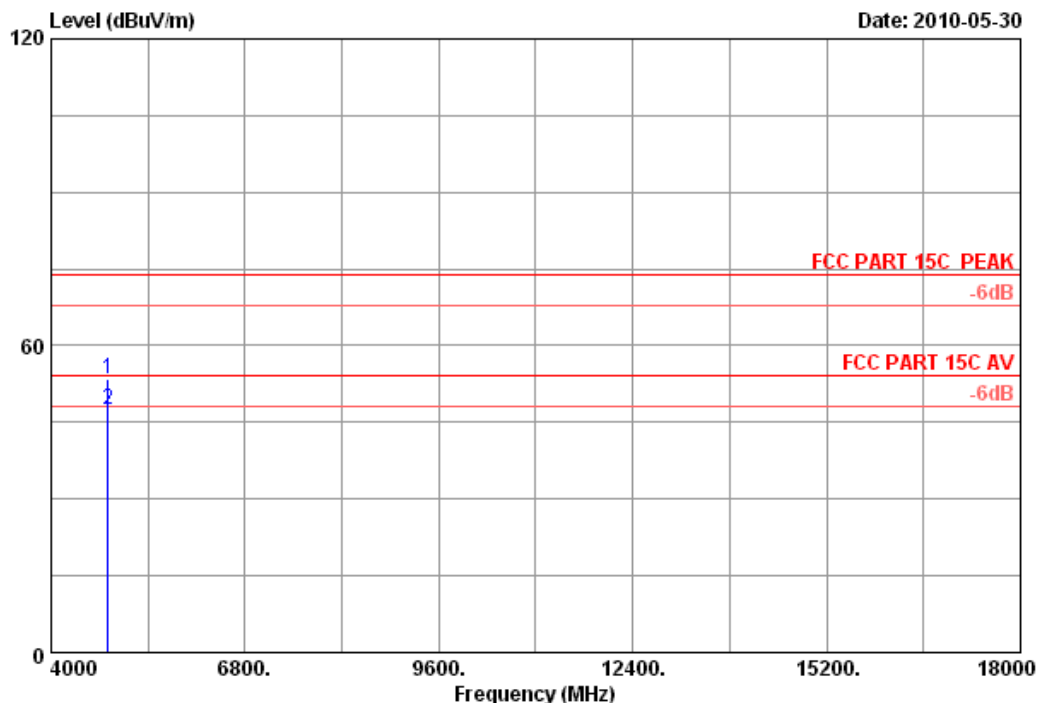

Site no. : 3m Chamber Data no. : 20
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	12.38	35.25	42.04	53.49	74.00	20.51	Peak
2	4824.000	34.32	12.38	35.25	36.12	47.57	54.00	6.43	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 21 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

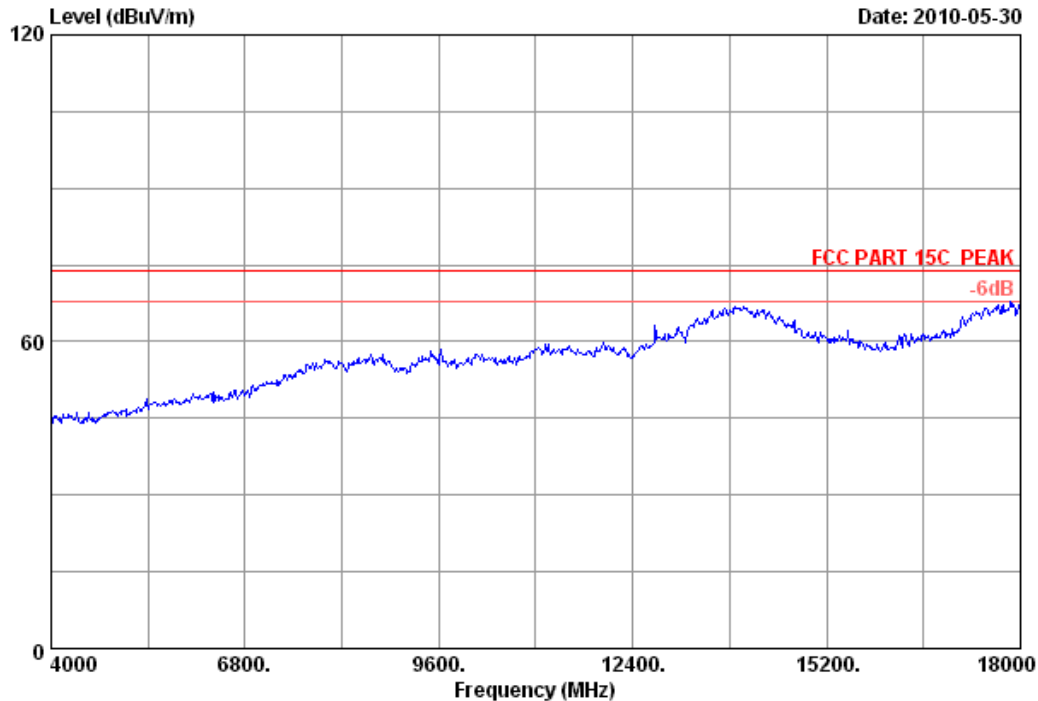


Site no.	: 3m Chamber	Data no.	: 21
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH1 2412MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 22 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

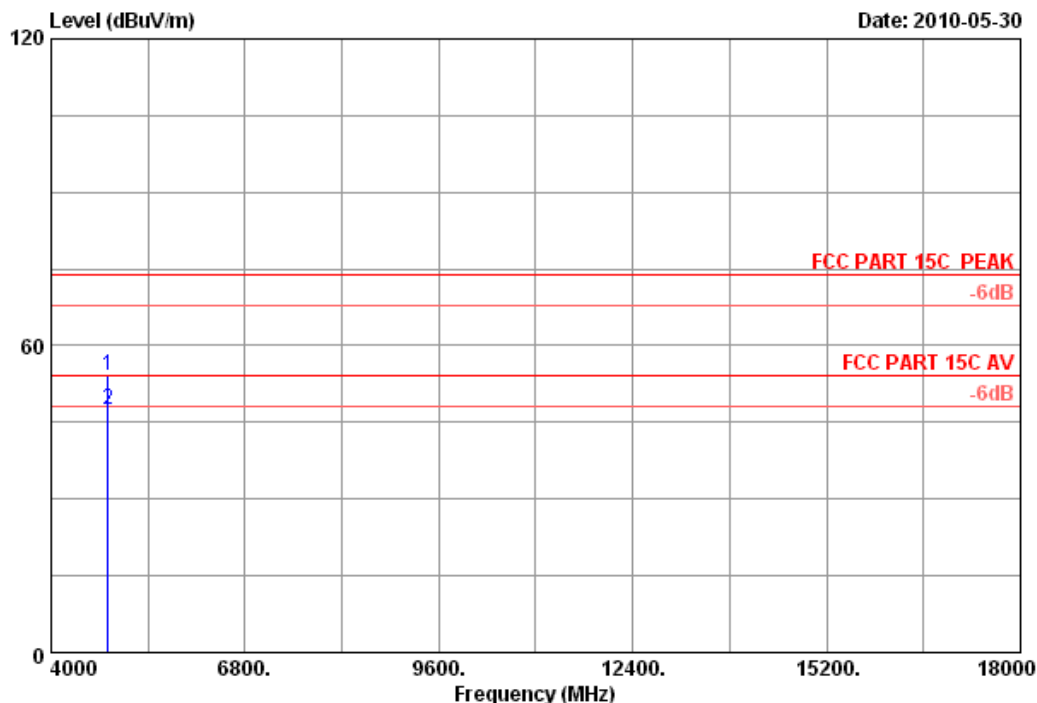

Site no. : 3m Chamber Data no. : 22
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4824.000	34.32	12.38	35.25	42.54	53.99	74.00	20.01	Peak
2	4824.000	34.32	12.38	35.25	36.14	47.59	54.00	6.41	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 23

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

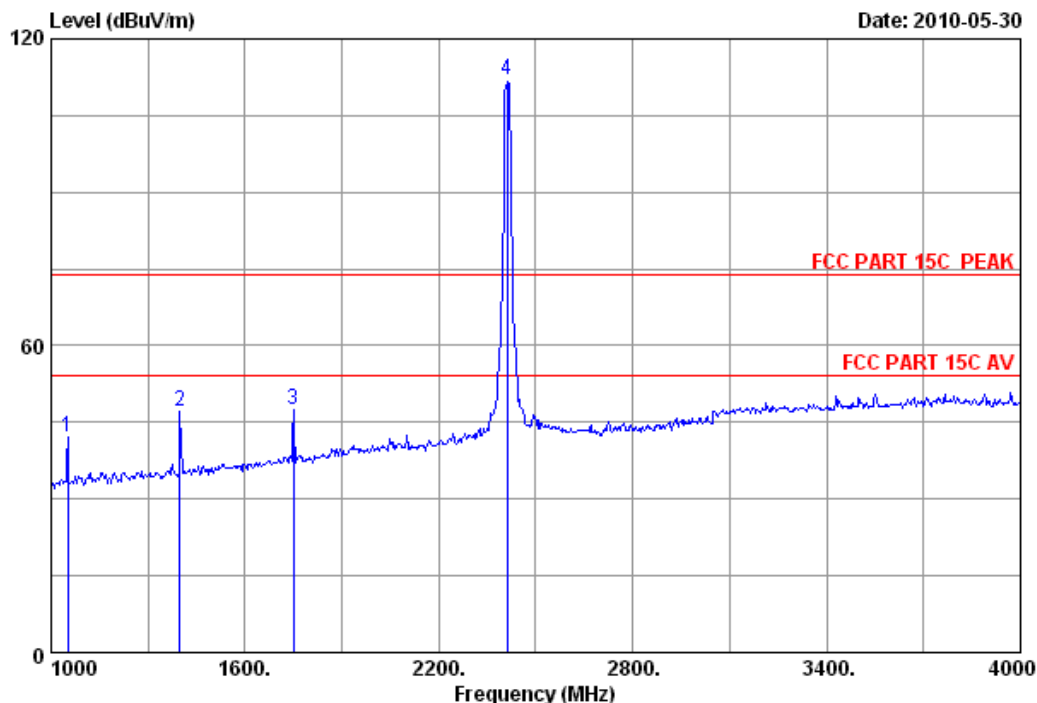

Site no. : 3m Chamber Data no. : 23
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	48.28	42.04	74.00	31.96	Peak
2	1399.000	26.19	6.49	36.69	51.12	47.11	74.00	26.89	Peak
3	1750.000	27.80	7.33	36.29	48.60	47.44	74.00	26.56	Peak
4	2412.000	29.45	8.72	35.95	109.86	112.08	74.00	-38.08	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 24 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

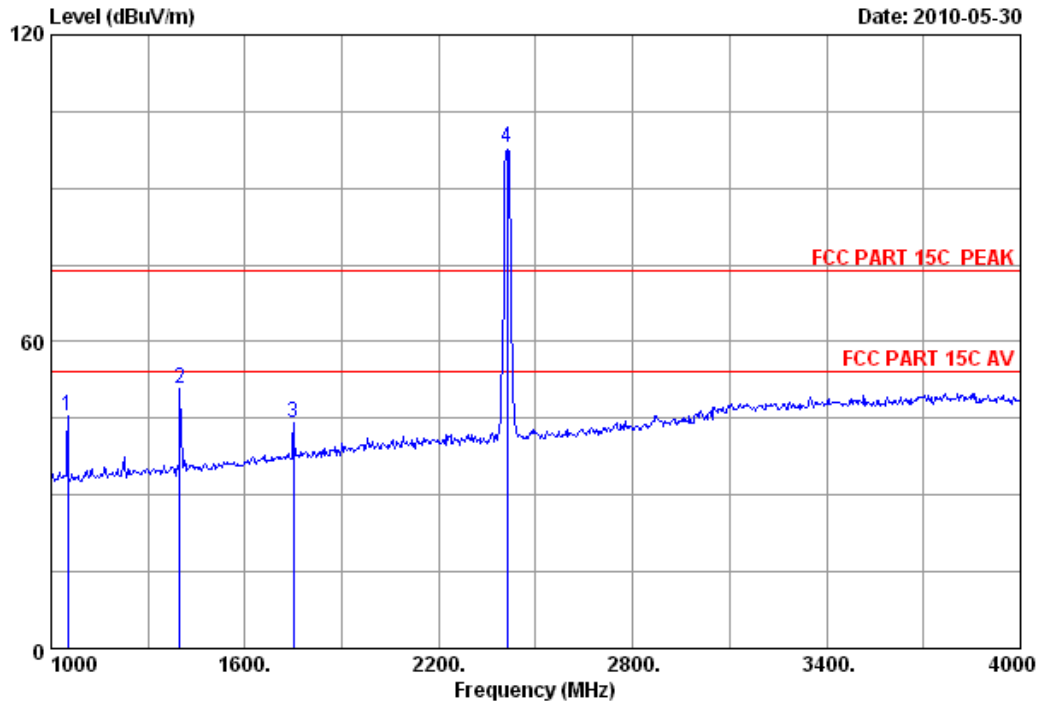

Site no. : 3m Chamber Data no. : 24
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.73	45.49	74.00	28.51	Peak
2	1399.000	26.19	6.49	36.69	54.98	50.97	74.00	23.03	Peak
3	1750.000	27.80	7.33	36.29	45.29	44.13	74.00	29.87	Peak
4	2412.000	29.45	8.72	35.95	95.77	97.99	74.00	-23.99	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 25

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

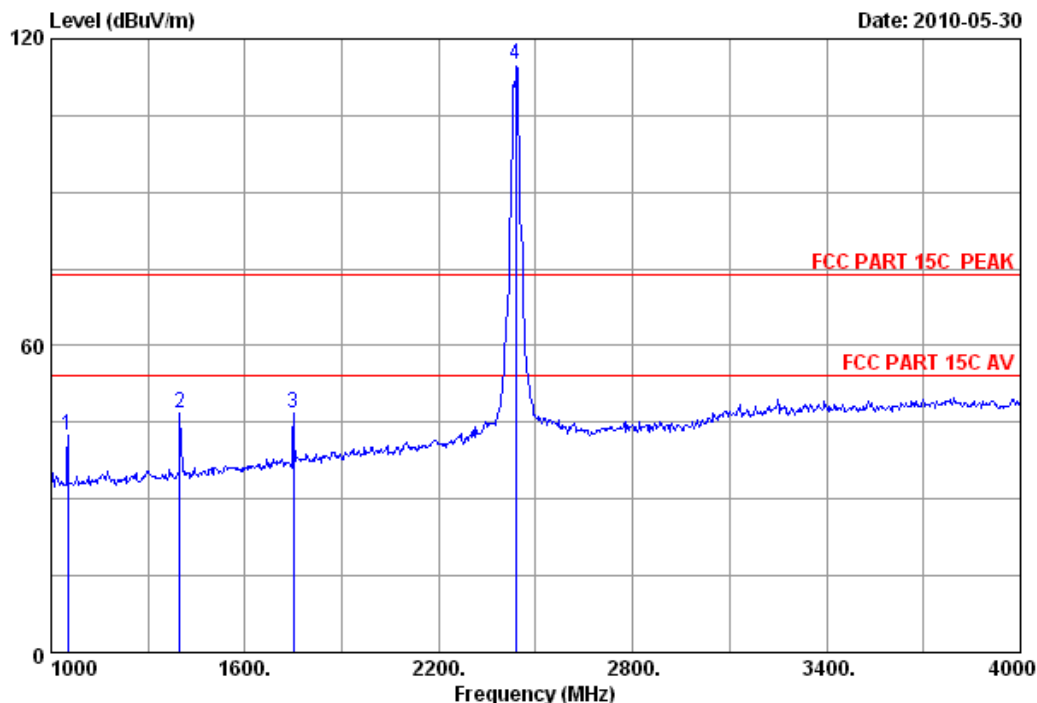

Site no. : 3m Chamber Data no. : 25
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH6 2437MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	48.70	42.46	74.00	31.54	Peak
2	1399.000	26.19	6.49	36.69	50.74	46.73	74.00	27.27	Peak
3	1750.000	27.80	7.33	36.29	48.04	46.88	74.00	27.12	Peak
4	2437.000	29.47	8.77	36.06	112.65	114.83	74.00	-40.83	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 26

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

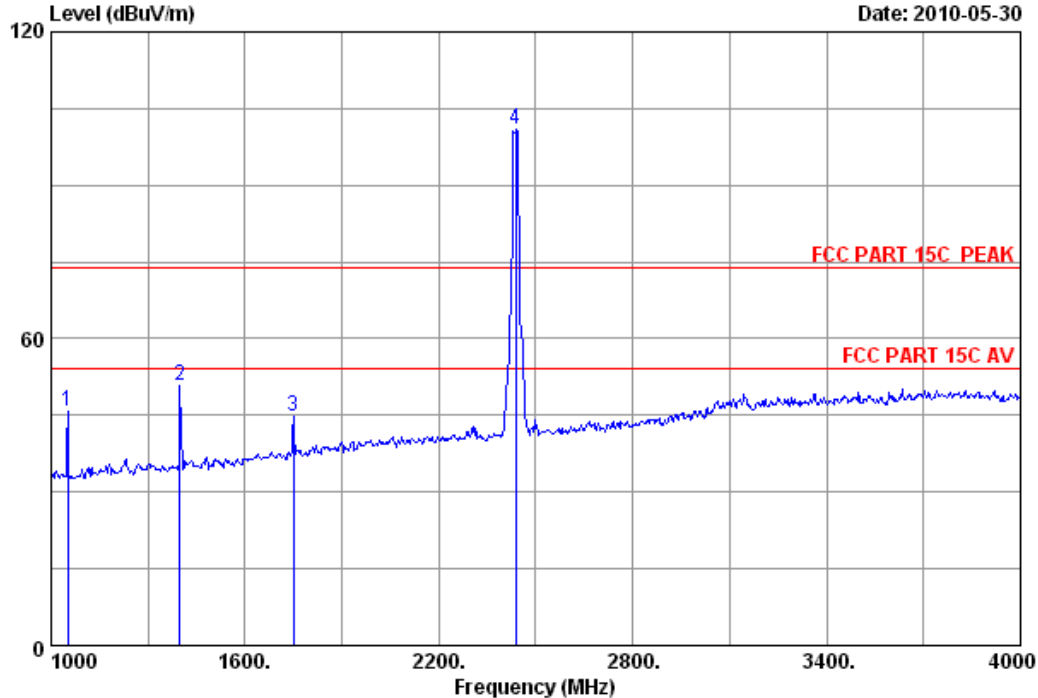

Site no. : 3m Chamber Data no. : 26
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH6 2437MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	52.05	45.81	74.00	28.19	Peak
2	1399.000	26.19	6.49	36.69	54.75	50.74	74.00	23.26	Peak
3	1750.000	27.80	7.33	36.29	45.95	44.79	74.00	29.21	Peak
4	2437.000	29.47	8.77	36.06	98.70	100.88	74.00	-26.88	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 27

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

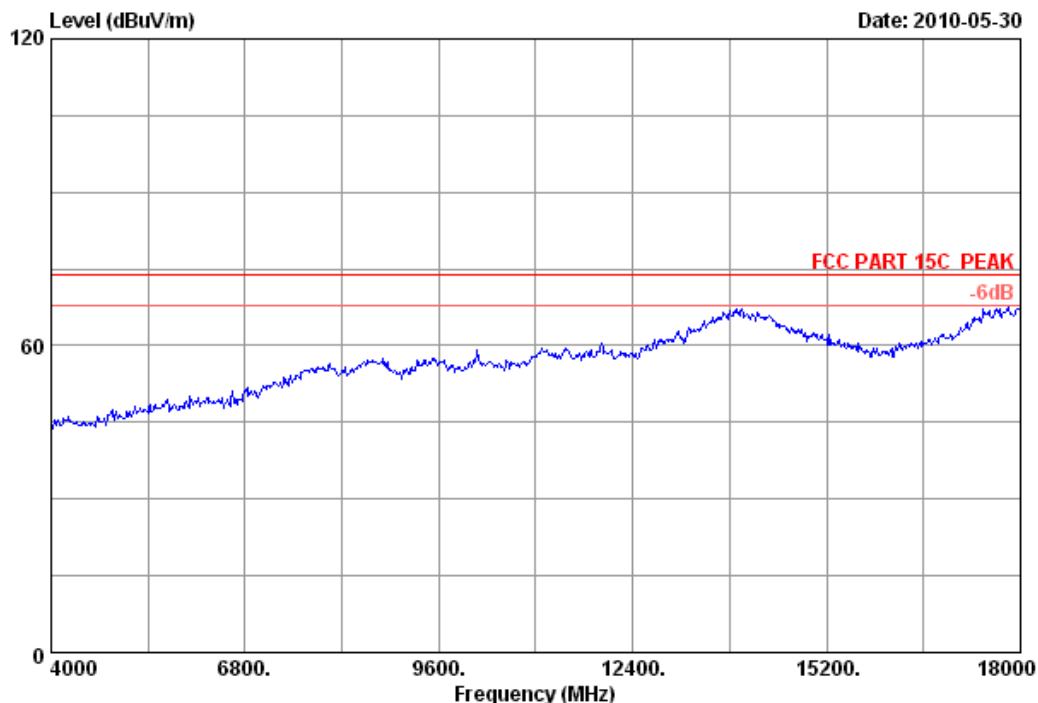


Site no.	: 3m Chamber	Data no.	: 27
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH6 2437MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 28 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

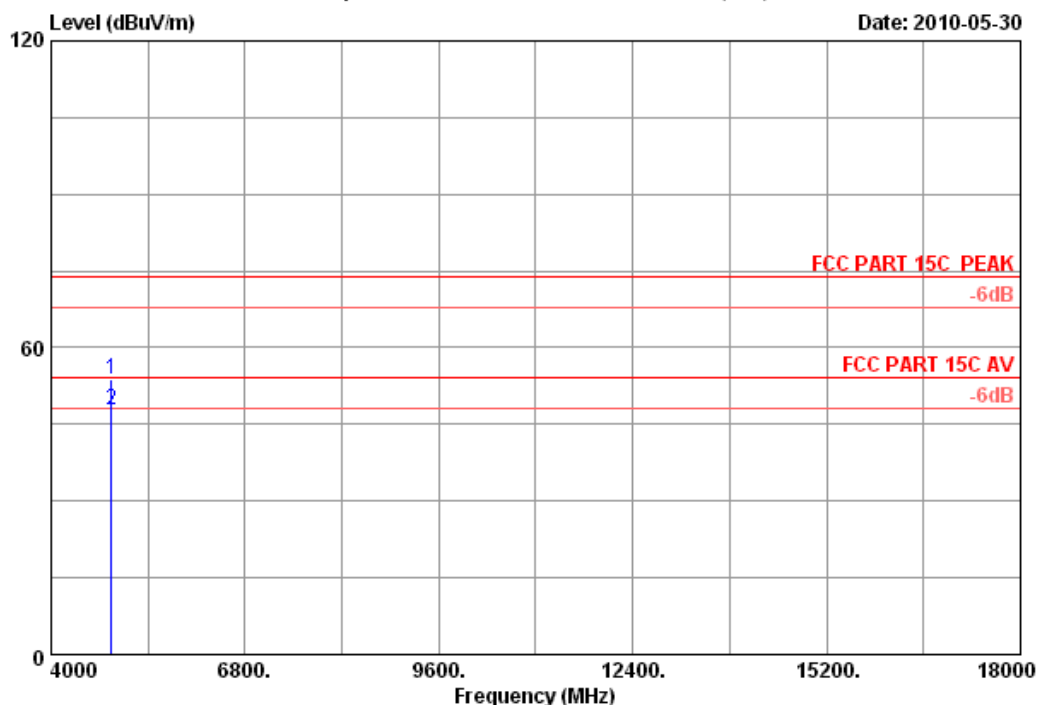

Site no. : 3m Chamber Data no. : 28
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH6 2437MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.41	12.44	35.36	42.41	53.90	74.00	20.10	Peak
2	4874.000	34.41	12.44	35.36	36.16	47.65	54.00	6.35	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 29 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

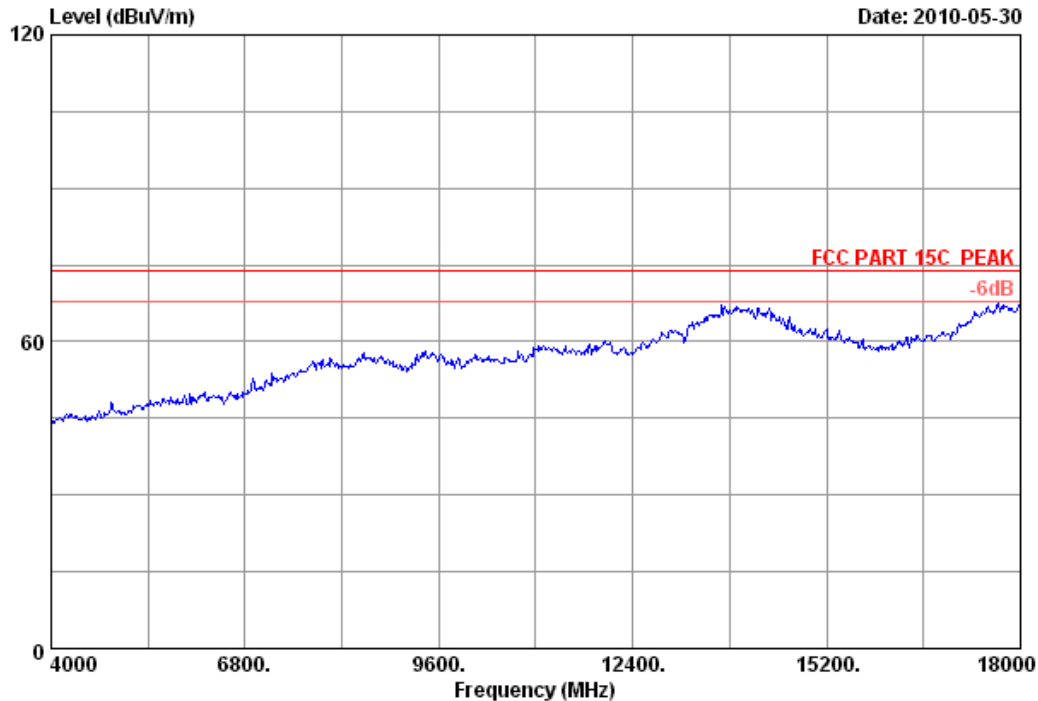

Site no.	: 3m Chamber	Data no.	: 29
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH6 2437MHz Tx		
M/N	: TL-WR743ND		




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 30

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

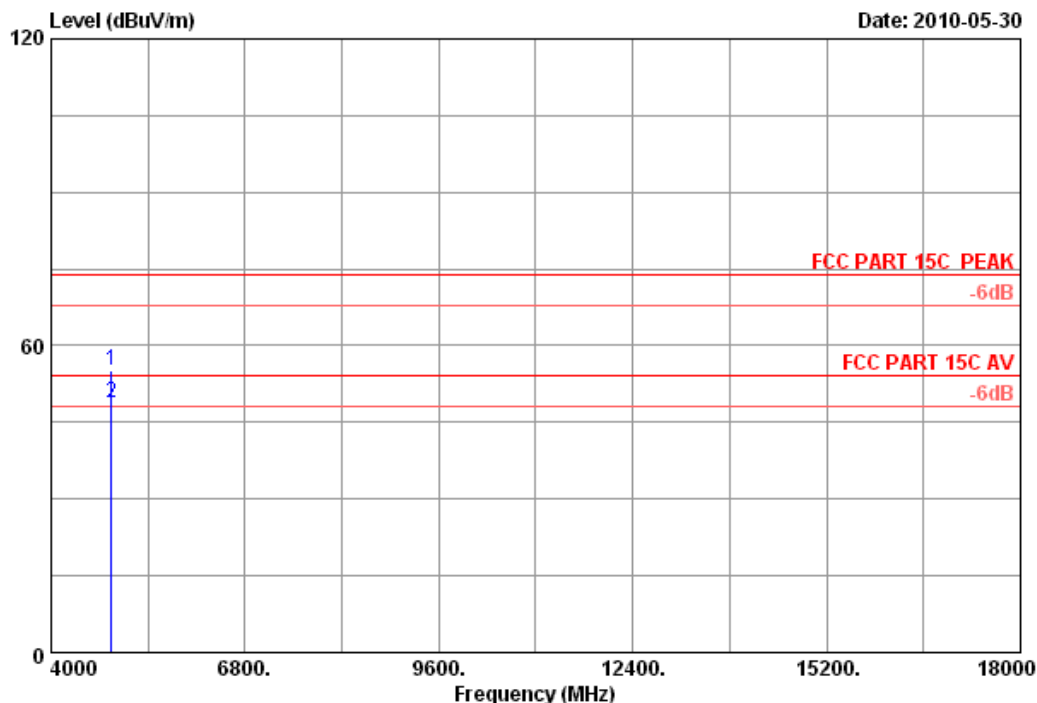

Site no. : 3m Chamber Data no. : 30
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH6 2437MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4874.000	34.41	12.44	35.36	43.58	55.07	74.00	18.93	Peak
2	4874.000	34.41	12.44	35.36	37.24	48.73	54.00	5.27	Average

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 31

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

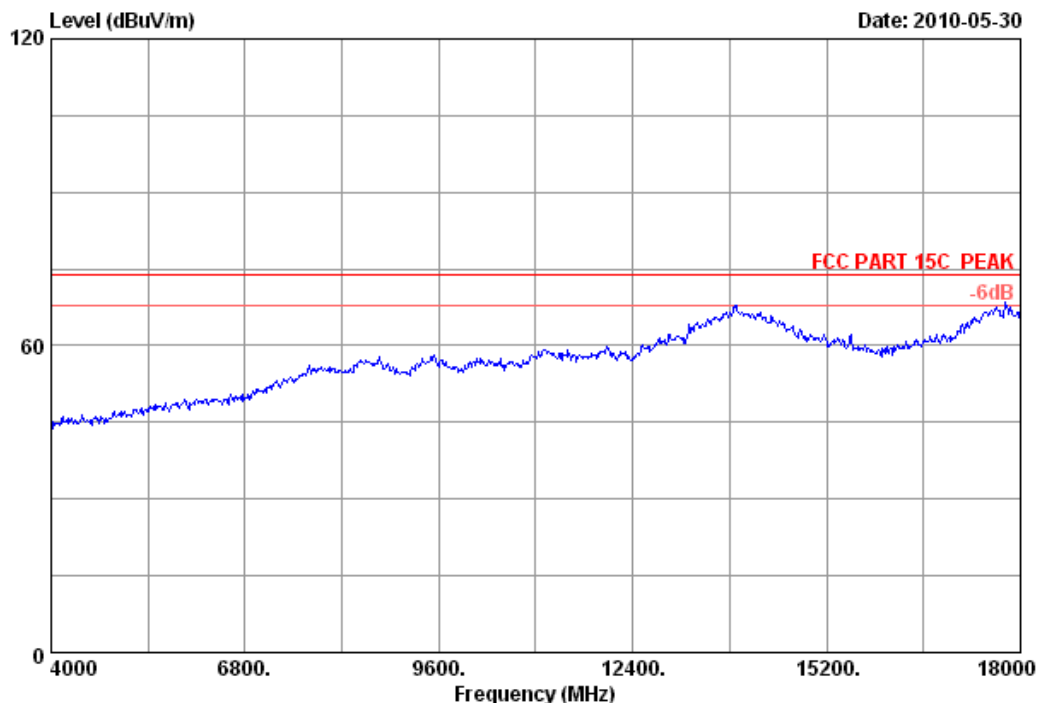


Site no.	: 3m Chamber	Data no.	: 31
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH11 2462MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 32 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

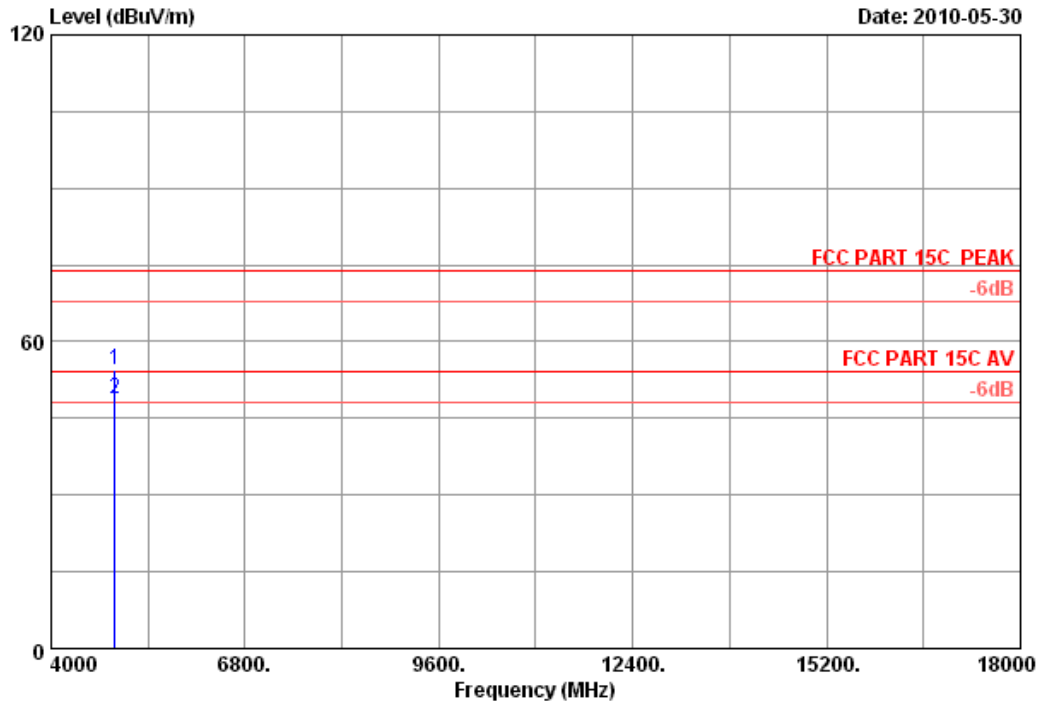

Site no. : 3m Chamber Data no. : 32
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4924.000	34.49	12.50	35.34	42.92	54.57	74.00	19.43	Peak
2	4924.000	34.49	12.50	35.34	37.19	48.84	54.00	5.16	Average

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 33

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

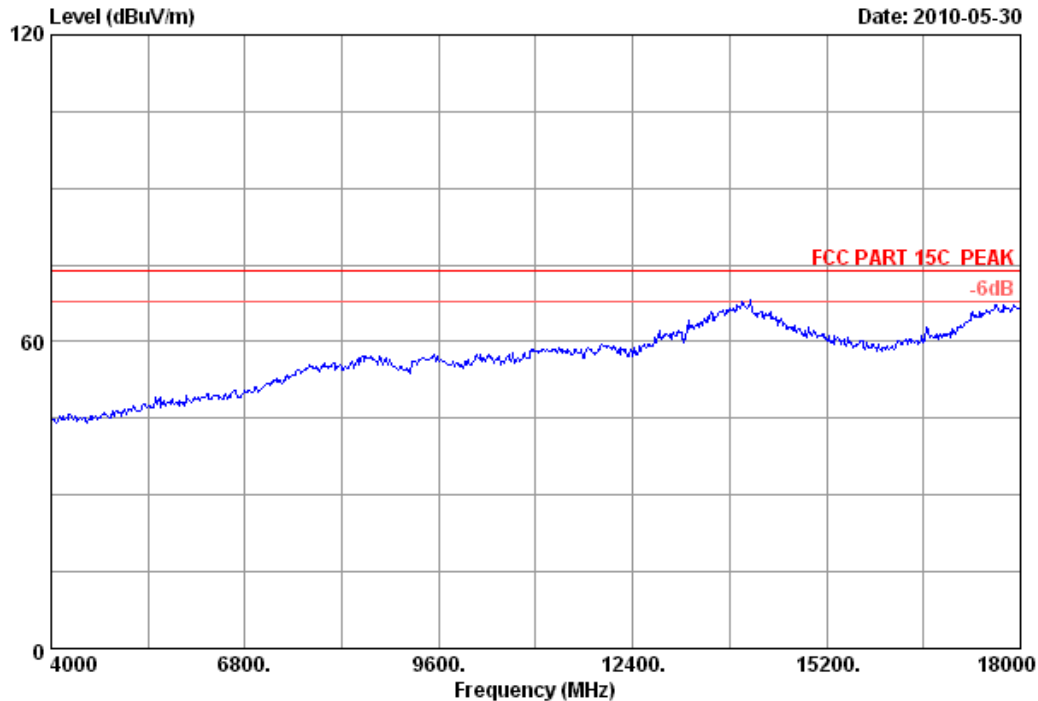

Site no.	: 3m Chamber	Data no.	: 33
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH11 2462MHz Tx		
M/N	: TL-WR743ND		




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 34

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

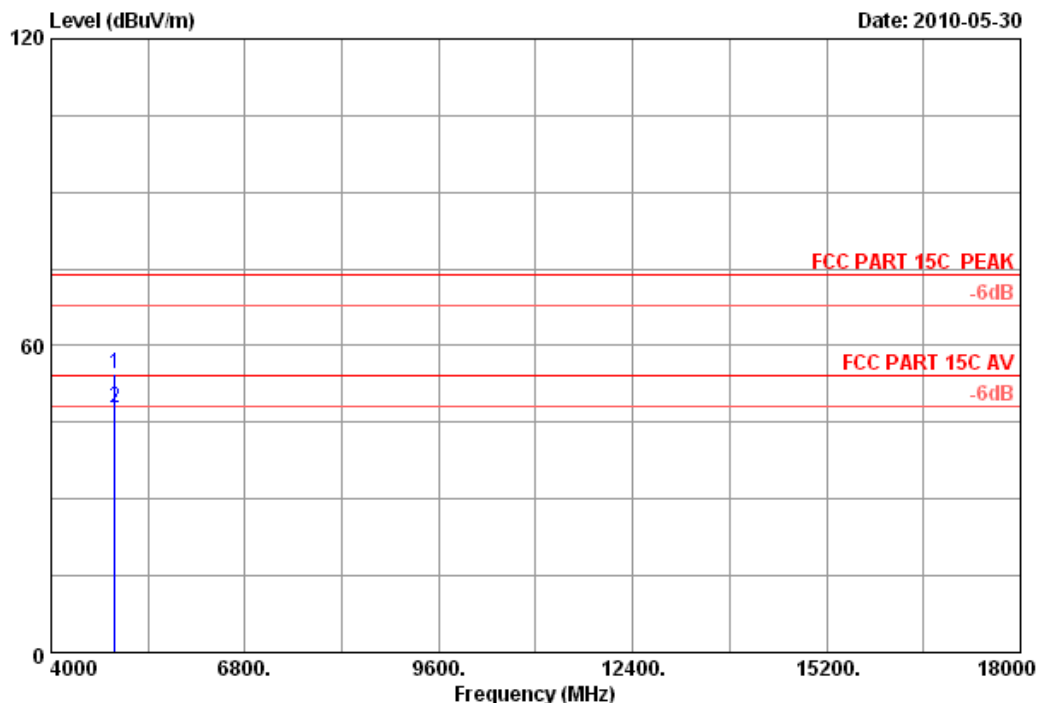

Site no. : 3m Chamber Data no. : 34
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	34.49	12.50	35.34	42.96	54.61	74.00	19.39	Peak
2	4924.000	34.49	12.50	35.34	36.18	47.83	54.00	6.17	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 35

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

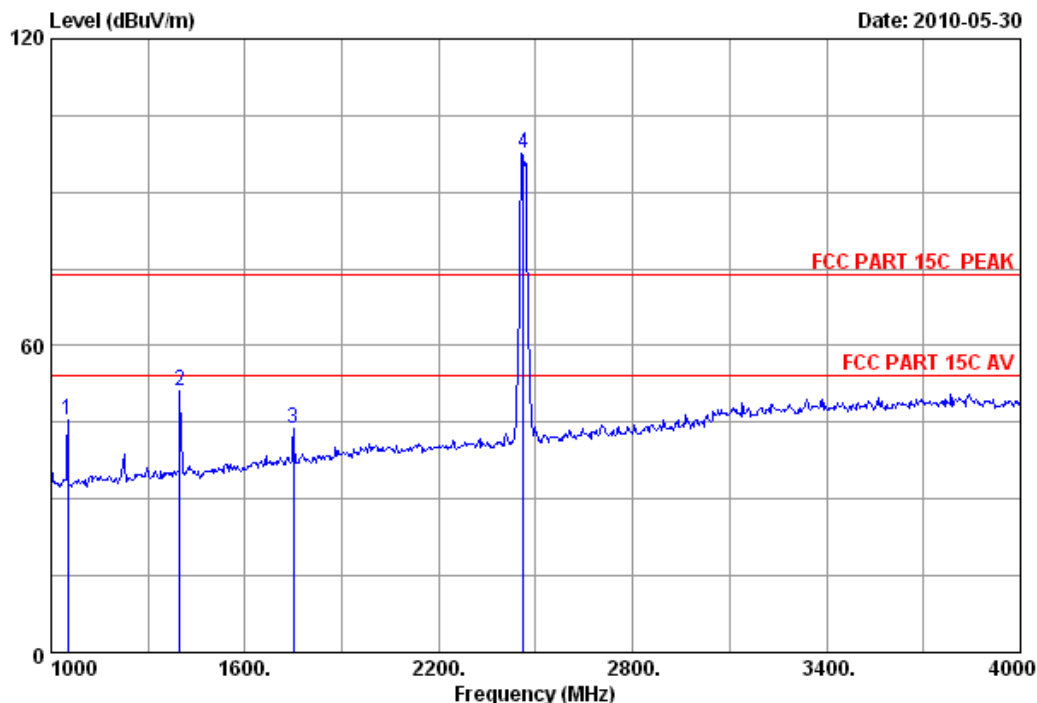

Site no. : 3m Chamber Data no. : 35
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.78	45.54	74.00	28.46	Peak
2	1399.000	26.19	6.49	36.69	55.05	51.04	74.00	22.96	Peak
3	1750.000	27.80	7.33	36.29	45.10	43.94	74.00	30.06	Peak
4	2462.000	29.48	8.82	36.02	95.33	97.61	74.00	-23.61	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 36

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

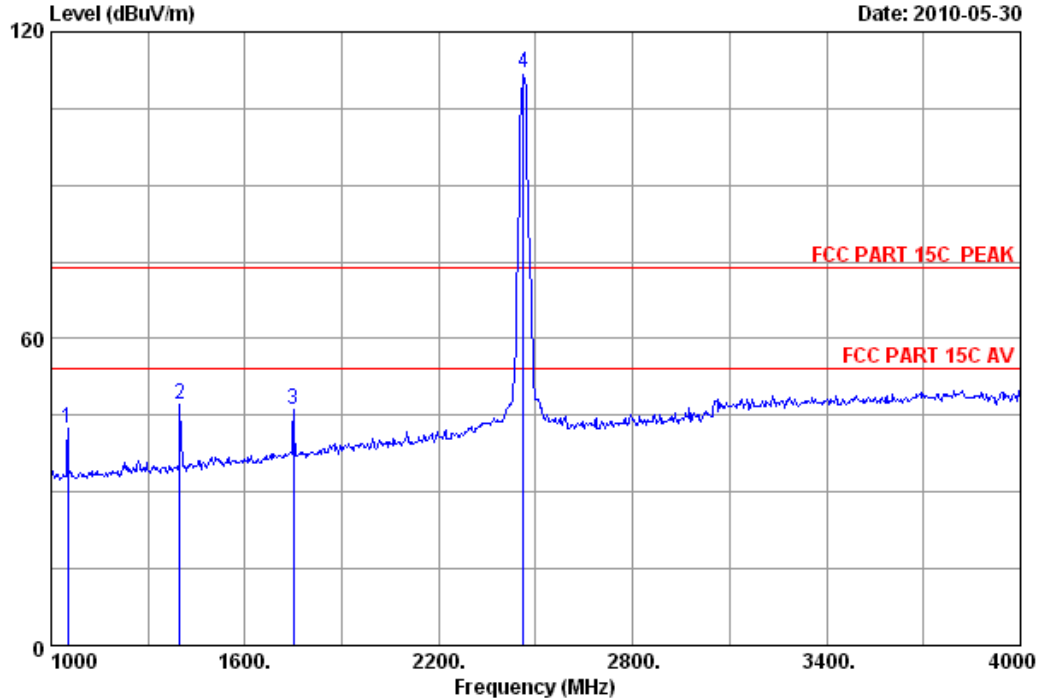

Site no. : 3m Chamber Data no. : 36
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	1051.000	25.50	5.60	37.34	48.80	42.56	74.00	31.44	Peak
2	1399.000	26.19	6.49	36.69	51.03	47.02	74.00	26.98	Peak
3	1750.000	27.80	7.33	36.29	47.18	46.02	74.00	27.98	Peak
4	2462.000	29.48	8.82	36.02	109.78	112.06	74.00	-38.06	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 37 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

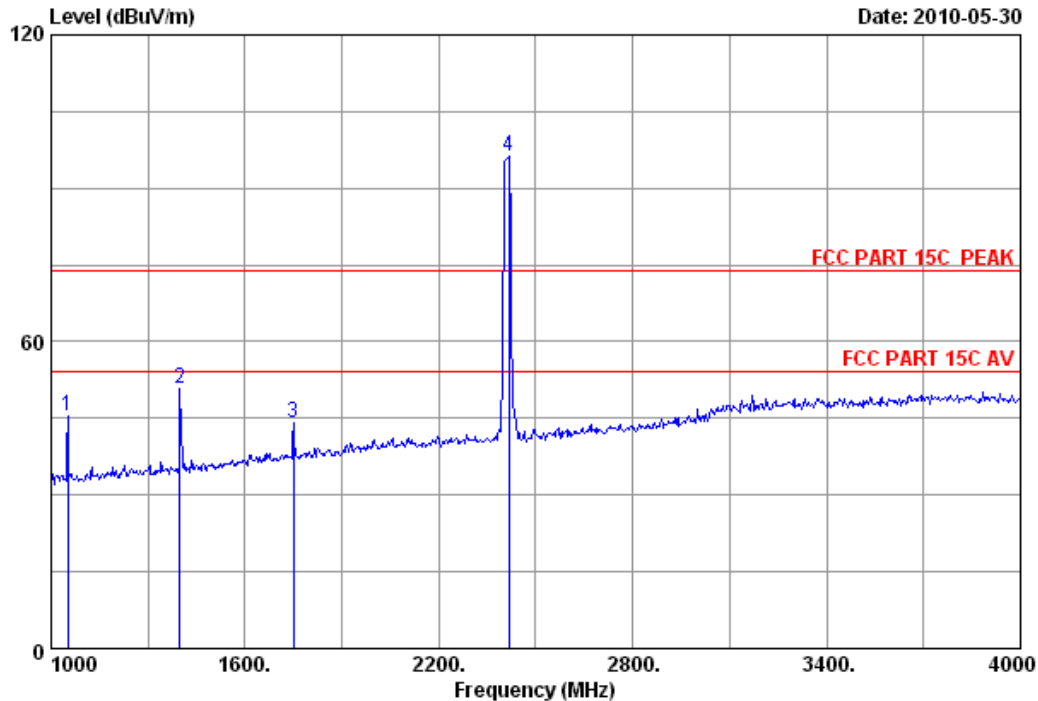

Site no. : 3m Chamber Data no. : 37
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.80	45.56	74.00	28.44	Peak
2	1399.000	26.19	6.49	36.69	54.86	50.85	74.00	23.15	Peak
3	1750.000	27.80	7.33	36.29	45.31	44.15	74.00	29.85	Peak
4	2416.000	29.45	8.72	35.95	93.91	96.13	74.00	-22.13	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 38

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

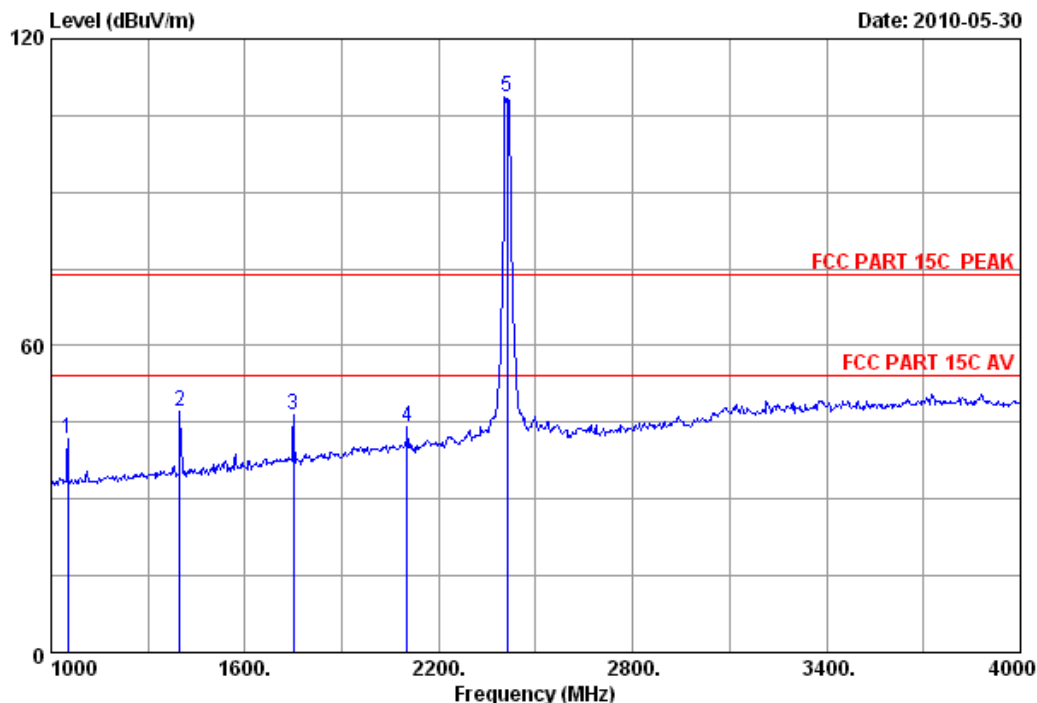

Site no. : 3m Chamber Data no. : 38
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	1051.000	25.50	5.60	37.34	48.19	41.95	74.00	32.05	Peak
2	1399.000	26.19	6.49	36.69	51.01	47.00	74.00	27.00	Peak
3	1750.000	27.80	7.33	36.29	47.58	46.42	74.00	27.58	Peak
4	2101.000	29.26	8.12	36.06	42.77	44.09	74.00	29.91	Peak
5	2412.000	29.45	8.72	35.95	106.53	108.75	74.00	-34.75	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 39 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

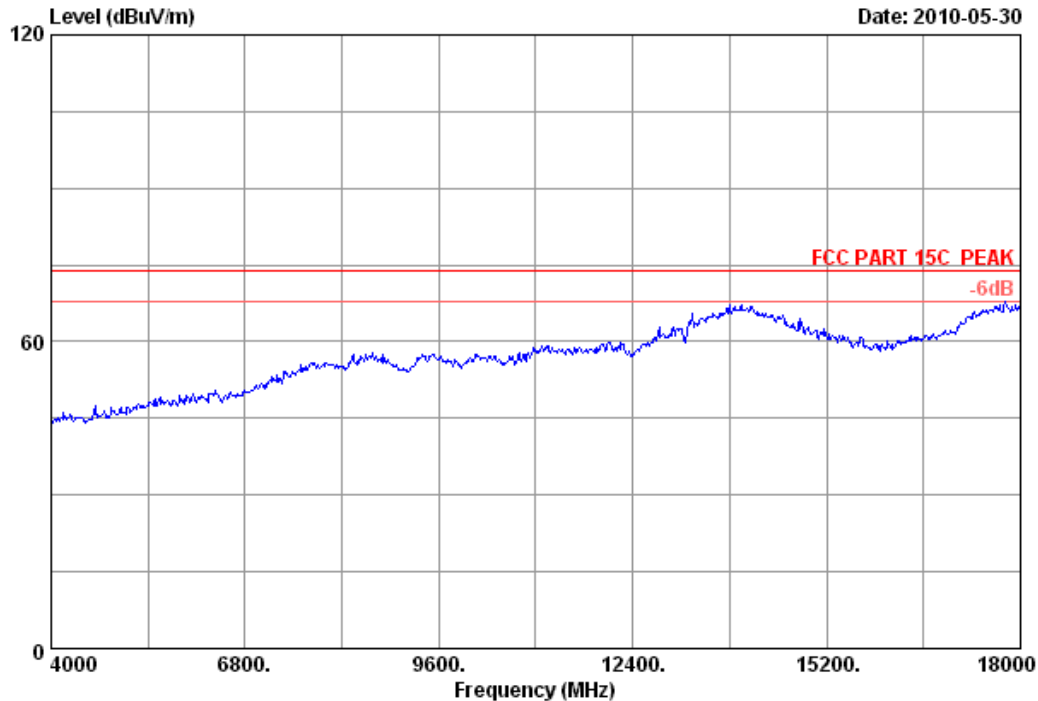


Site no.	: 3m Chamber	Data no.	: 39
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH1 2412MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 40 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

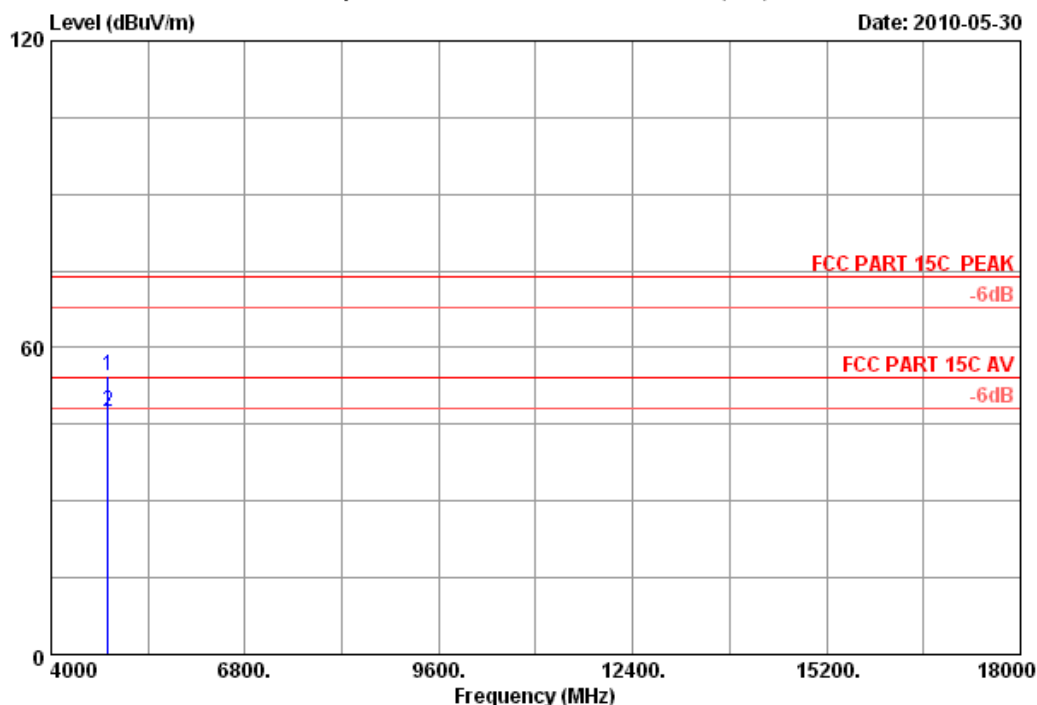

Site no. : 3m Chamber Data no. : 40
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	34.32	12.38	35.25	42.88	54.33	74.00	19.67	Peak
2	4824.000	34.32	12.38	35.25	36.09	47.54	54.00	6.46	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 41 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

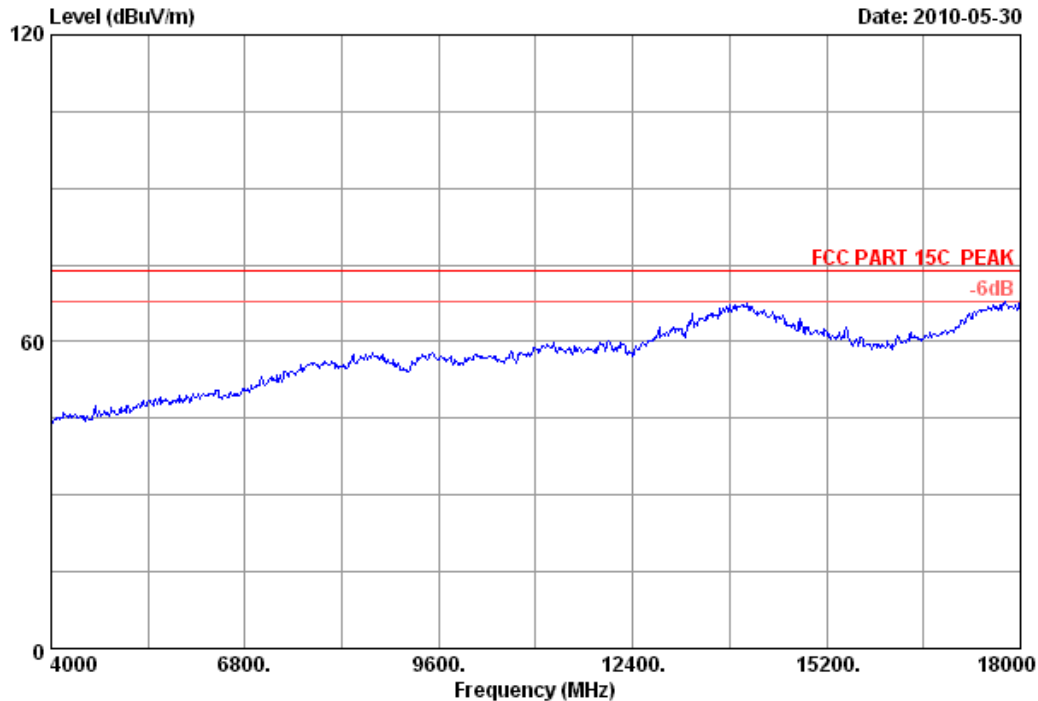

Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH1 2412MHz Tx		
M/N	: TL-WR743ND		




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 42

File: E:\2010 report data\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

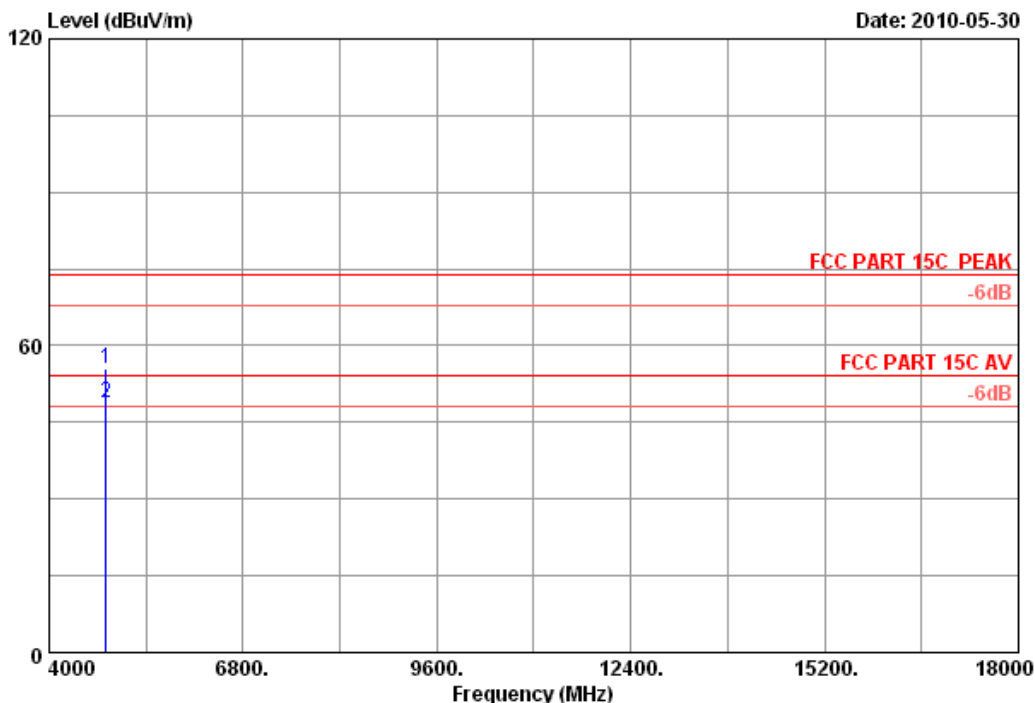

Site no. : 3m Chamber Data no. : 42
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	12.38	35.25	43.96	55.41	74.00	18.59	Peak
2	4824.000	34.32	12.38	35.25	37.26	48.71	54.00	5.29	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 43 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

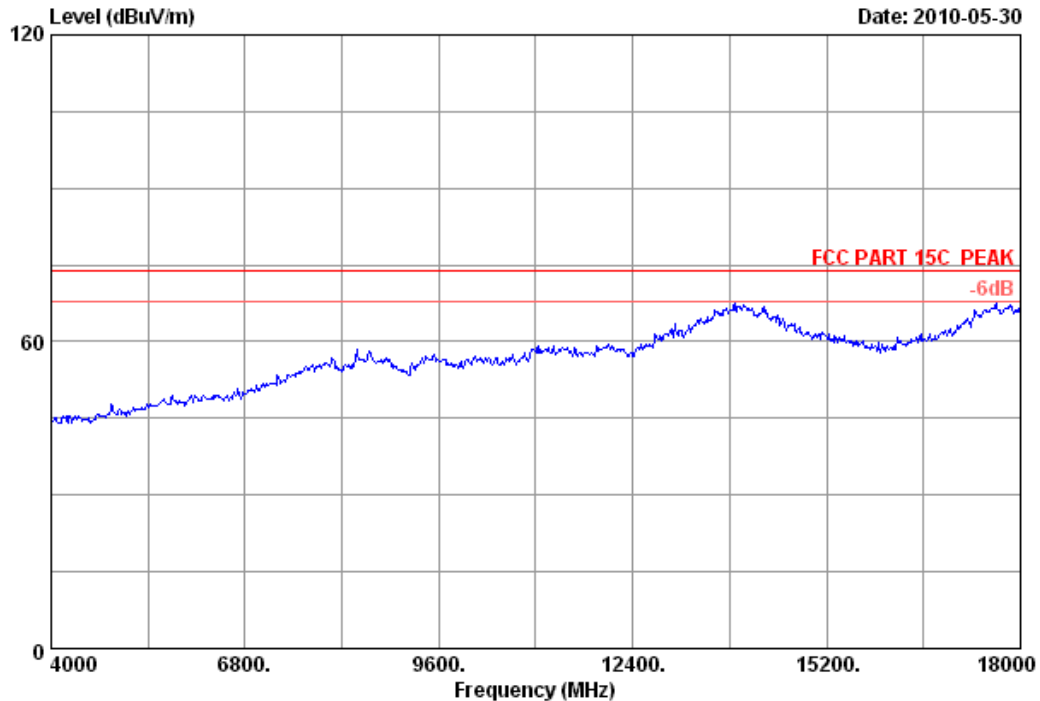


Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH6 2437MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 44 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

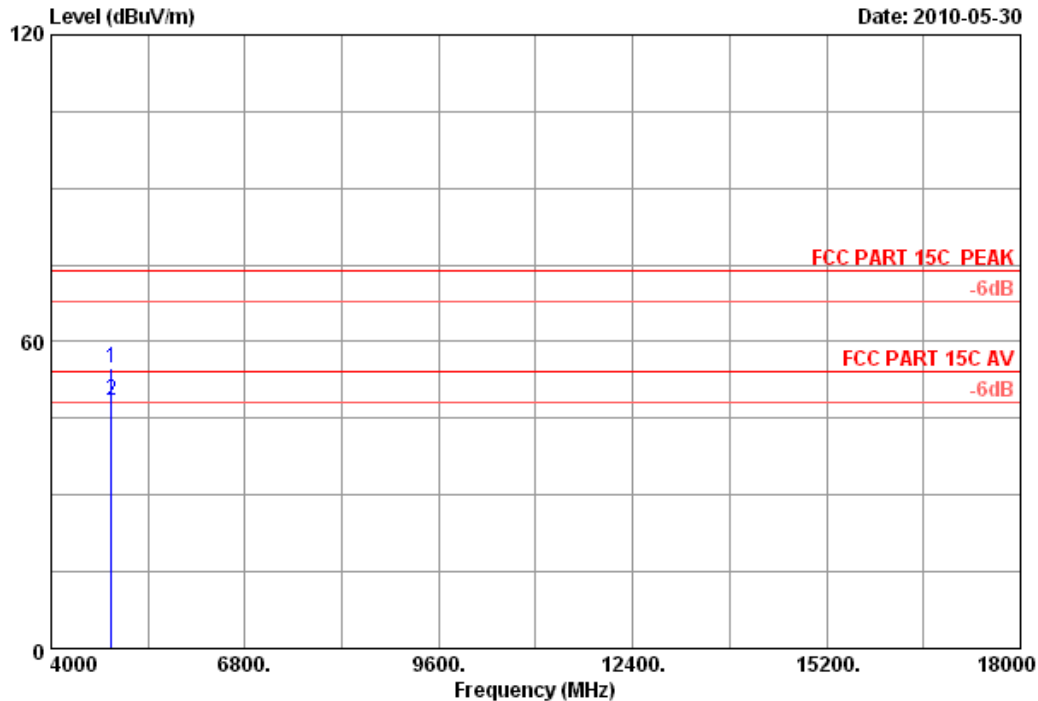

Site no. : 3m Chamber Data no. : 44
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.41	12.44	35.36	43.42	54.91	74.00	19.09	Peak
2	4874.000	34.41	12.44	35.36	36.97	48.46	54.00	5.54	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 45

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

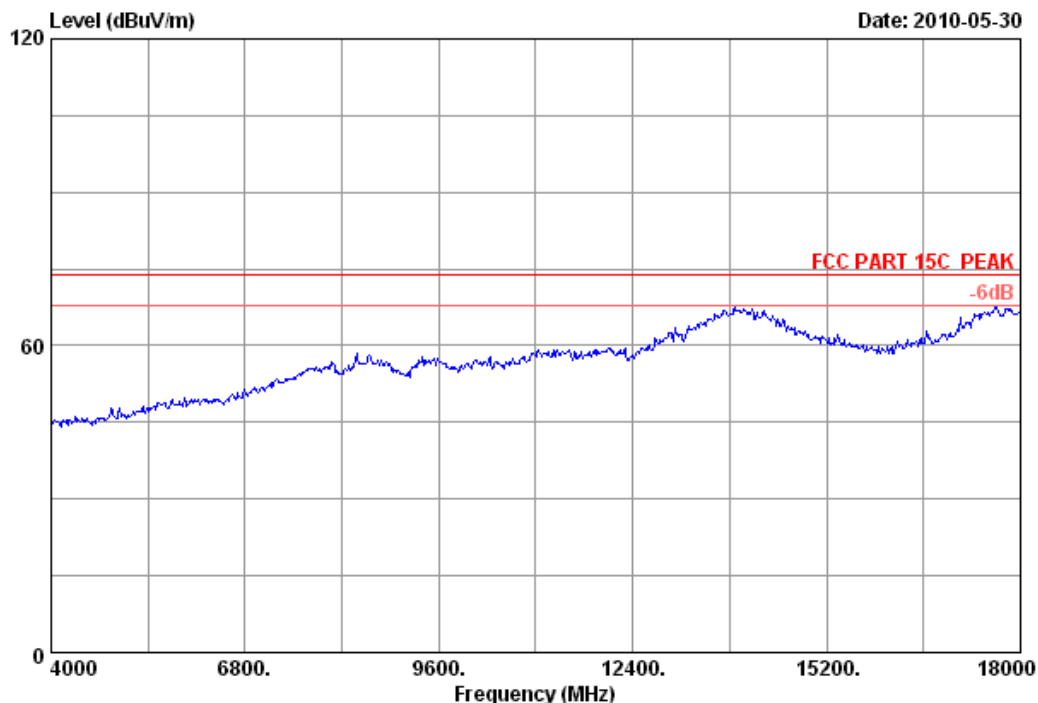

Site no.	: 3m Chamber	Data no.	: 45
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH6 2437MHz Tx		
M/N	: TL-WR743ND		




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 46

File: E:\2010 report data\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

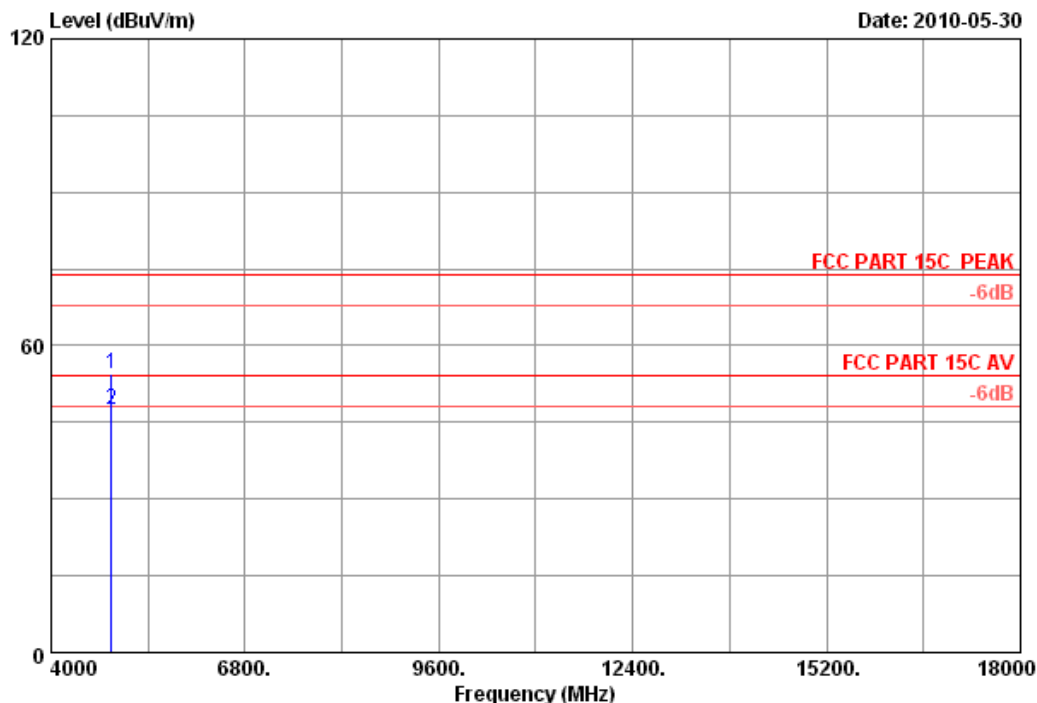

Site no. : 3m Chamber Data no. : 46
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.41	12.44	35.36	42.95	54.44	74.00	19.56	Peak
2	4874.000	34.41	12.44	35.36	36.11	47.60	54.00	6.40	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 47 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

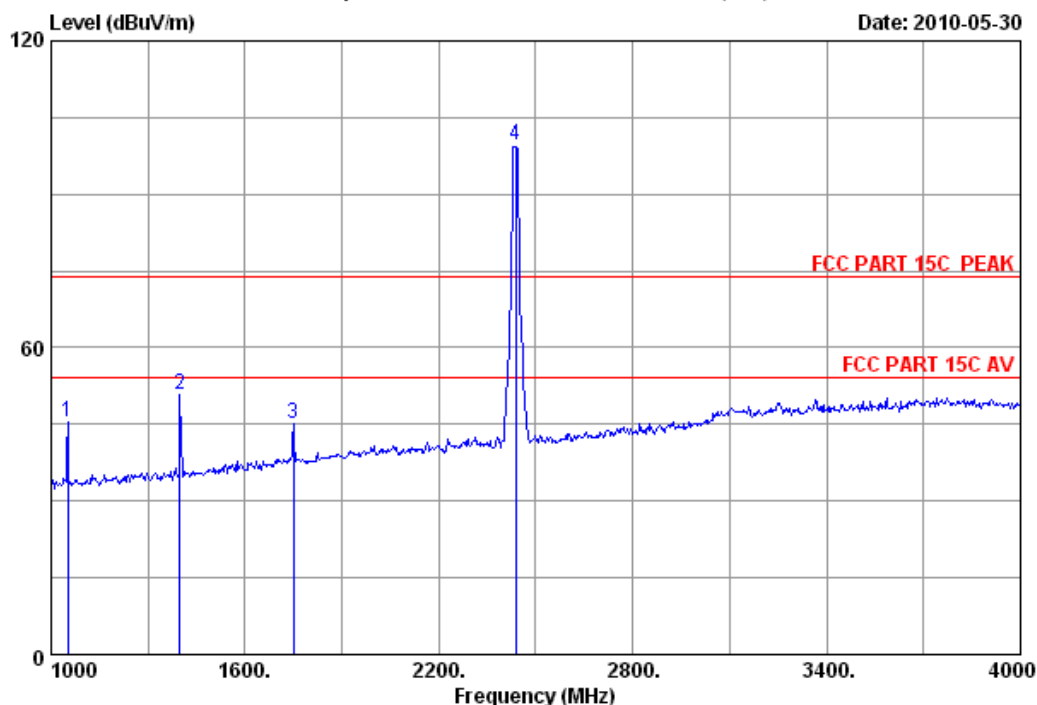

Site no. : 3m Chamber Data no. : 47
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.73	45.49	74.00	28.51	Peak
2	1399.000	26.19	6.49	36.69	54.67	50.66	74.00	23.34	Peak
3	1750.000	27.80	7.33	36.29	46.22	45.06	74.00	28.94	Peak
4	2437.000	29.47	8.77	36.06	97.51	99.69	74.00	-25.69	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 48

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

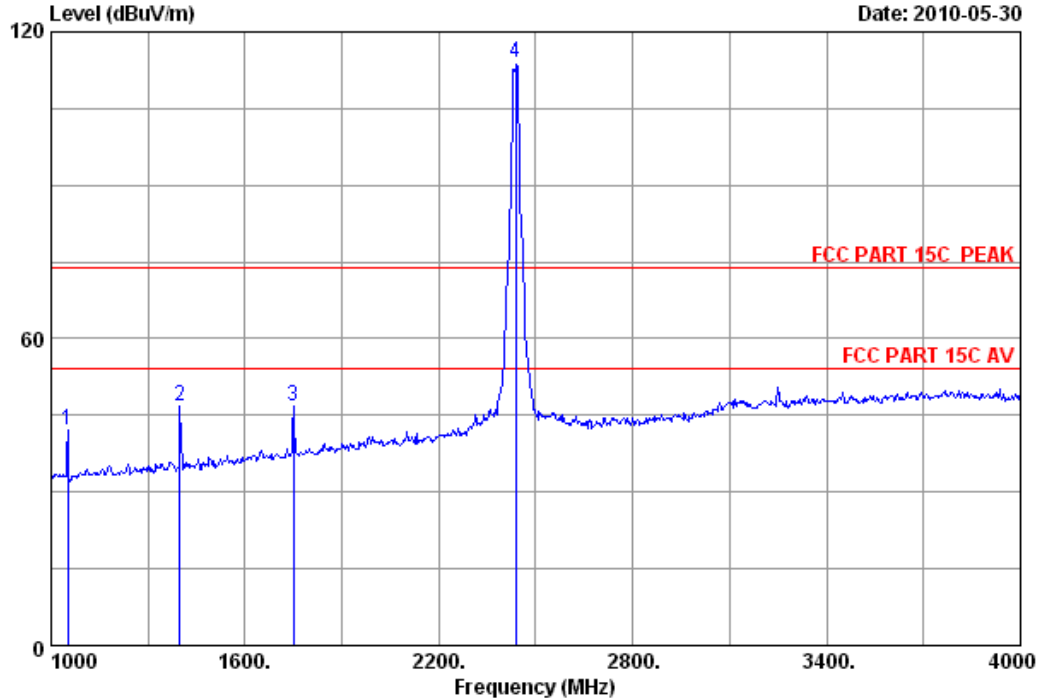

Site no. : 3m Chamber Data no. : 48
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	48.36	42.12	74.00	31.88	Peak
2	1399.000	26.19	6.49	36.69	50.92	46.91	74.00	27.09	Peak
3	1750.000	27.80	7.33	36.29	47.93	46.77	74.00	27.23	Peak
4	2437.000	29.47	8.77	36.06	111.80	113.98	74.00	-39.98	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 49

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

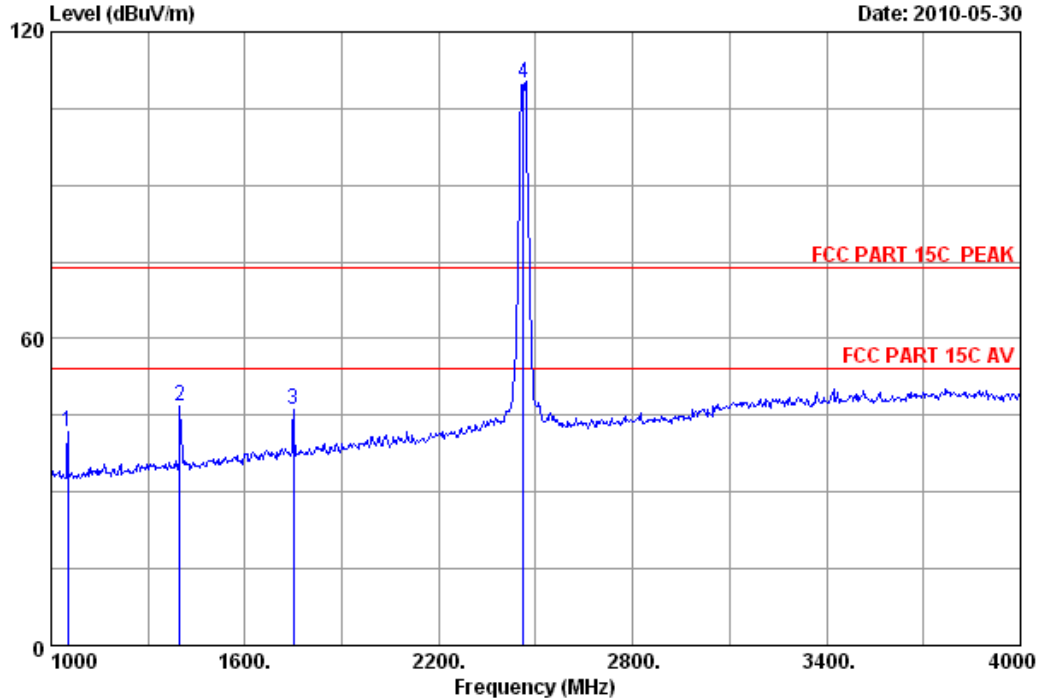

Site no. : 3m Chamber Data no. : 49
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	48.03	41.79	74.00	32.21	Peak
2	1399.000	26.19	6.49	36.69	50.81	46.80	74.00	27.20	Peak
3	1750.000	27.80	7.33	36.29	47.35	46.19	74.00	27.81	Peak
4	2462.000	29.48	8.82	36.02	107.83	110.11	74.00	-36.11	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 50

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

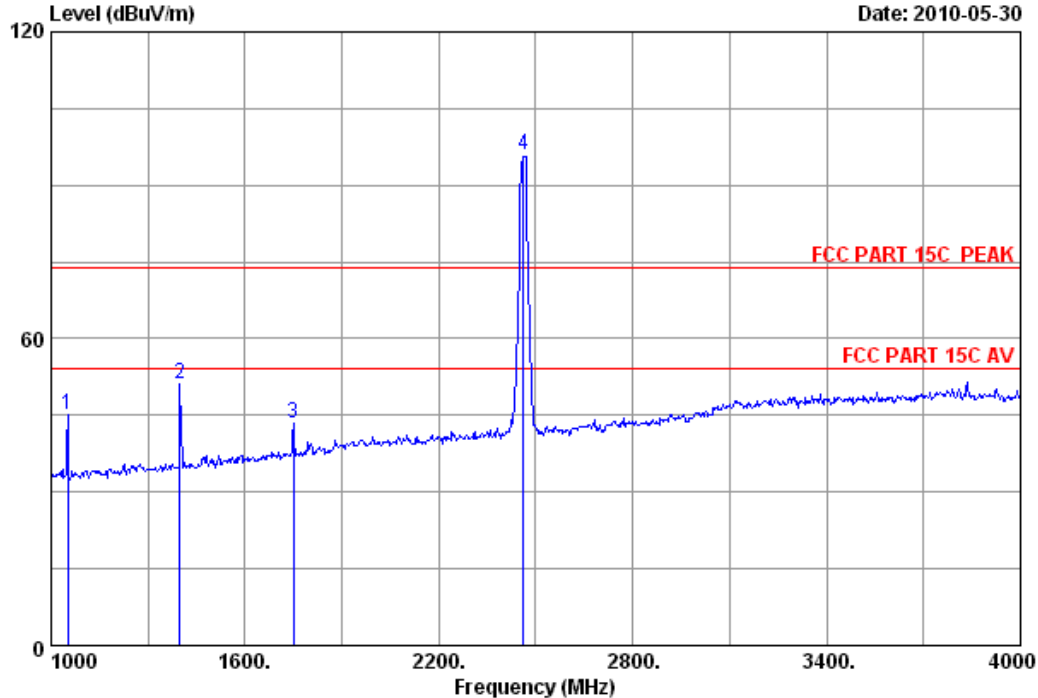

Site no. : 3m Chamber Data no. : 50
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.33	45.09	74.00	28.91	Peak
2	1399.000	26.19	6.49	36.69	55.06	51.05	74.00	22.95	Peak
3	1750.000	27.80	7.33	36.29	44.56	43.40	74.00	30.60	Peak
4	2462.000	29.48	8.82	36.02	93.65	95.93	74.00	-21.93	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 51 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

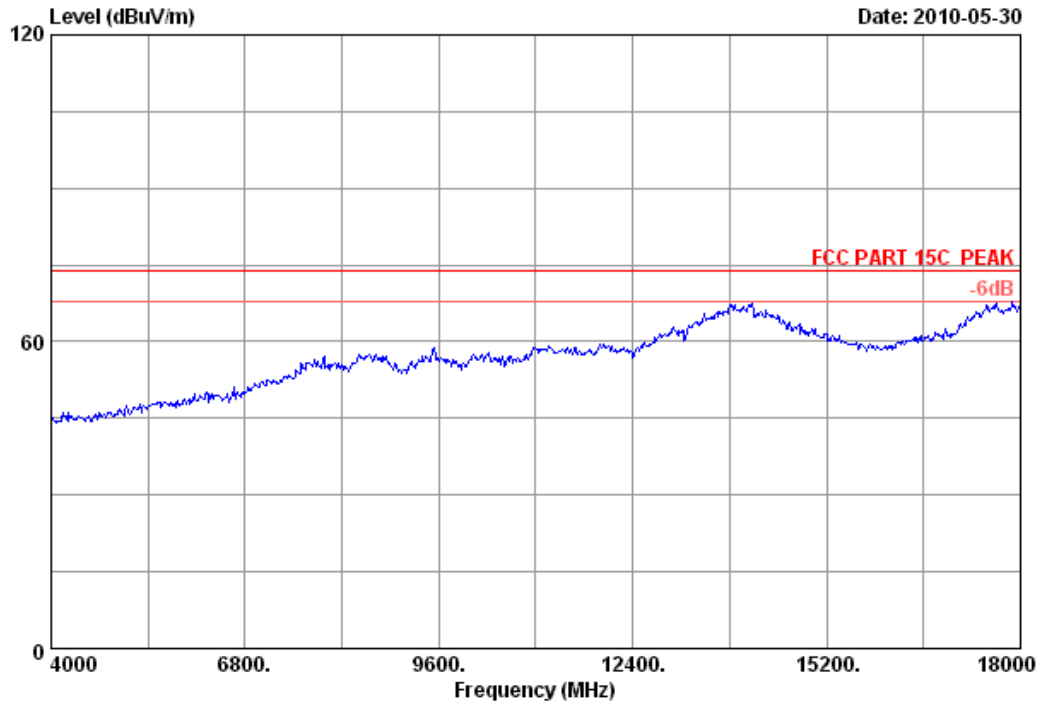


Site no.	: 3m Chamber	Data no.	: 51
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH11 2462MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 52 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

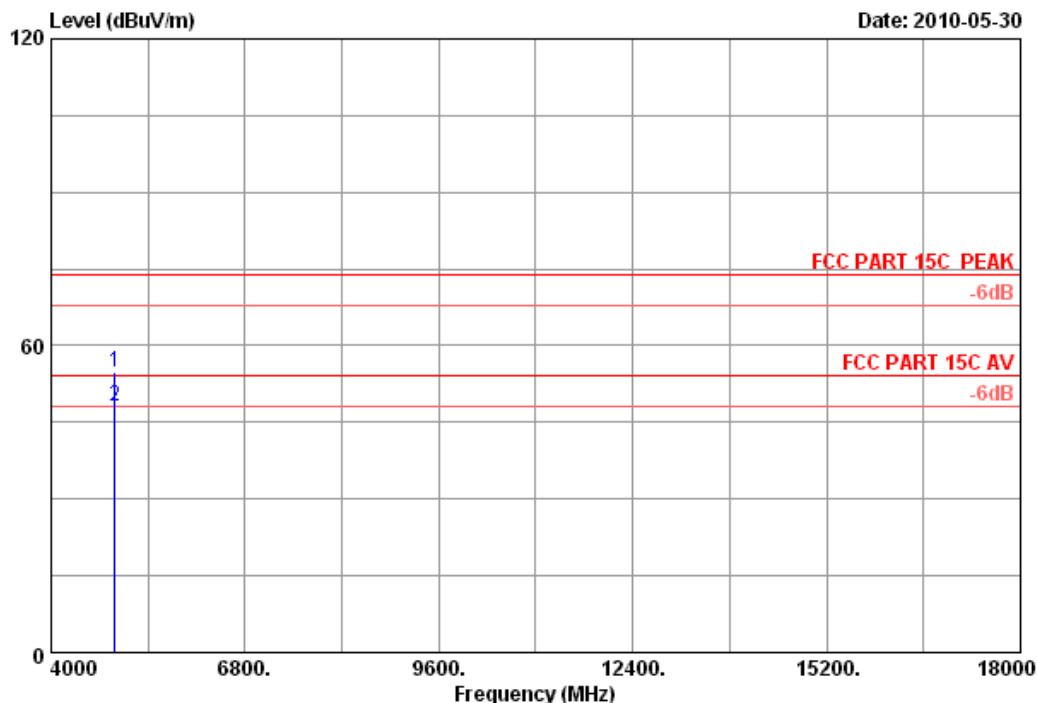

Site no. : 3m Chamber Data no. : 52
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	34.49	12.50	35.34	43.04	54.69	74.00	19.31	Peak
2	4924.000	34.49	12.50	35.34	36.57	48.22	54.00	5.78	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 53

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

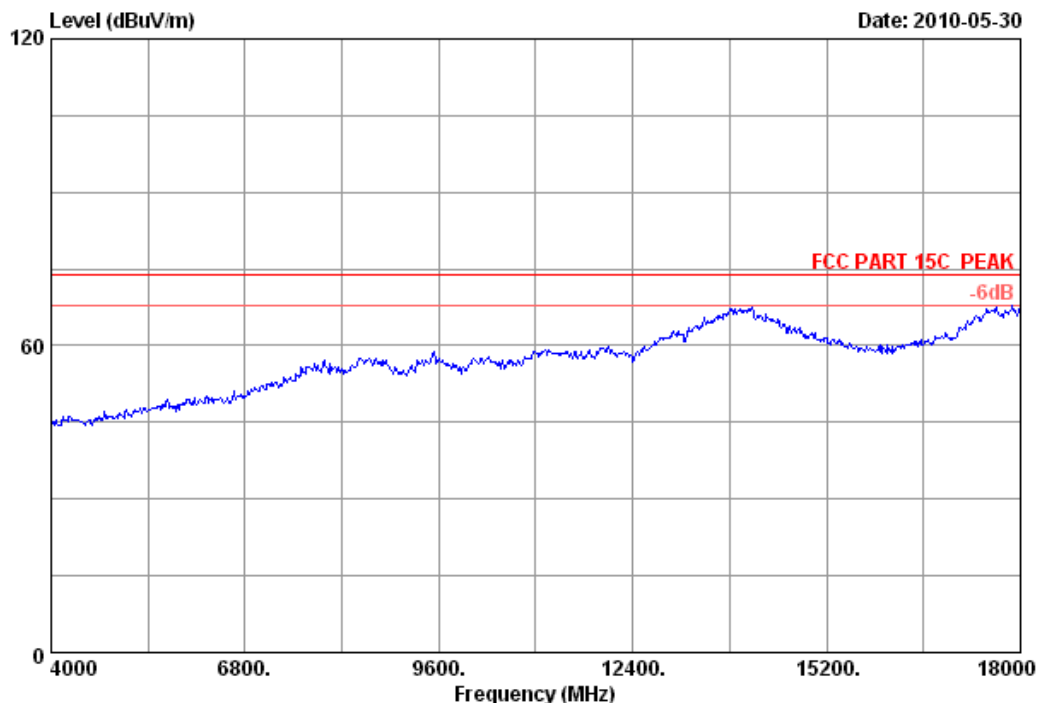

Site no.	: 3m Chamber	Data no.	: 53
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH11 2462MHz Tx		
M/N	: TL-WR743ND		




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 54

File: E:\2010 report data\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

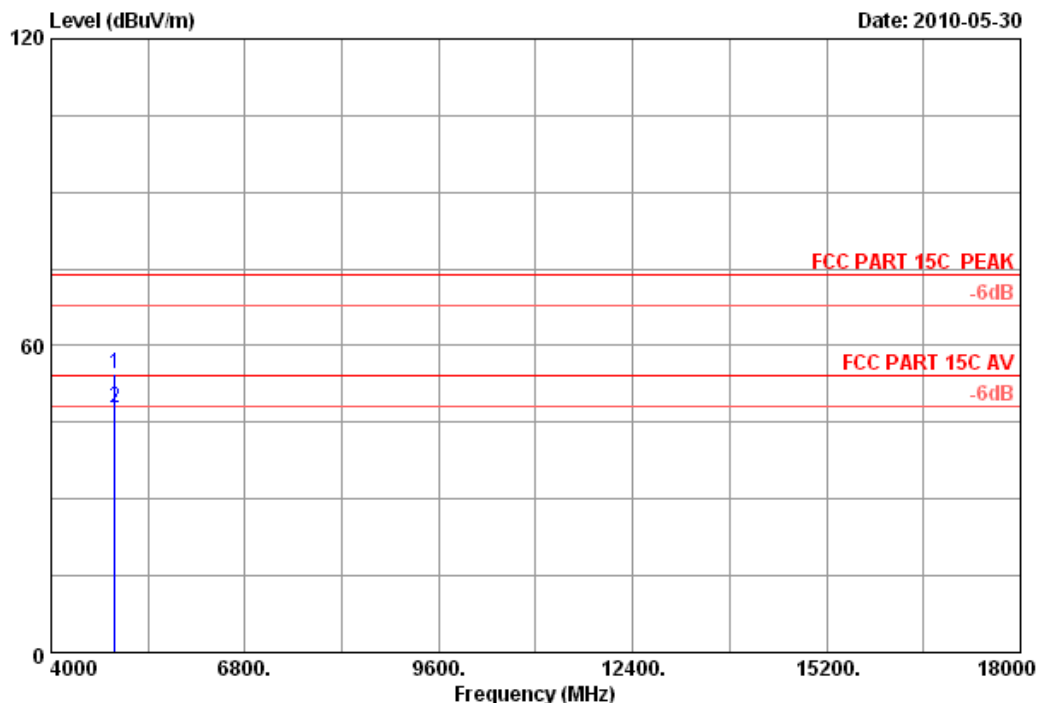

Site no. : 3m Chamber Data no. : 54
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	34.49	12.50	35.34	42.69	54.34	74.00	19.66	Peak
2	4924.000	34.49	12.50	35.34	36.12	47.77	54.00	6.23	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 55

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

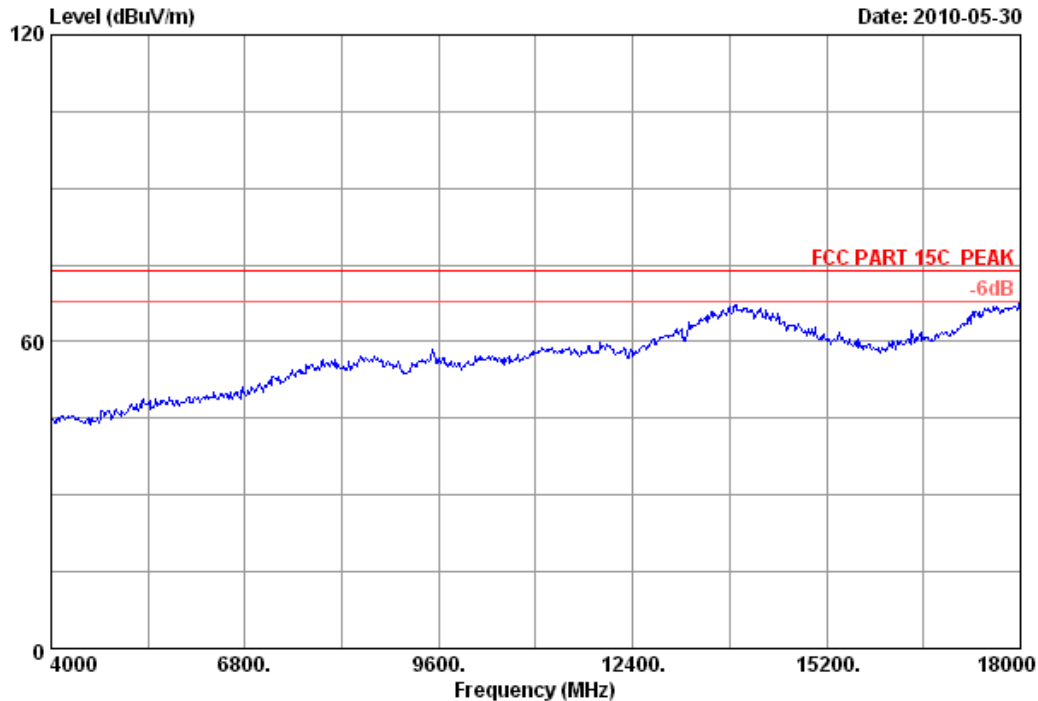


Site no.	: 3m Chamber	Data no.	: 55
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH1 2422MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 56 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

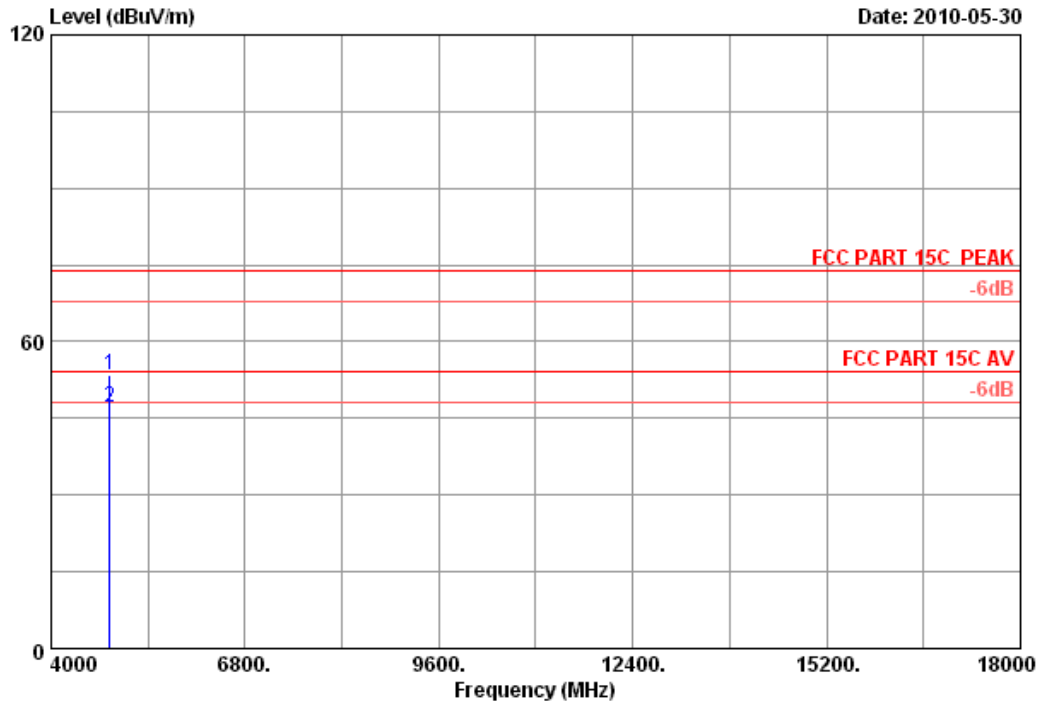

Site no. : 3m Chamber Data no. : 56
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4844.000	34.35	12.38	35.25	42.05	53.53	74.00	20.47	Peak
2	4844.000	34.35	12.38	35.25	35.62	47.10	54.00	6.90	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 57

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

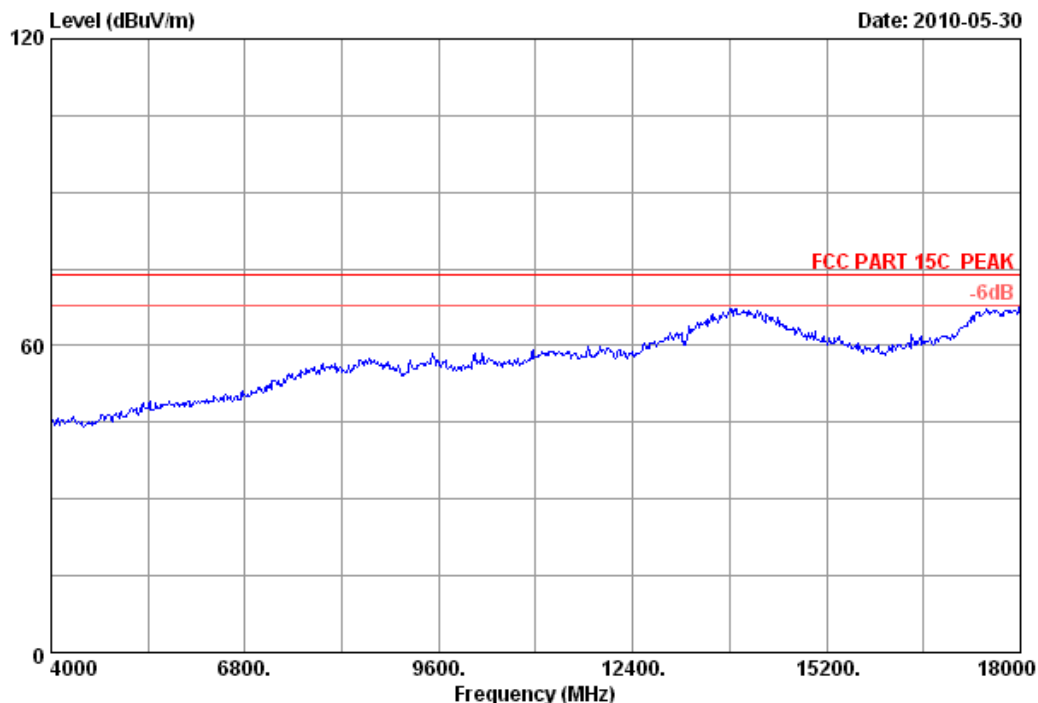


Site no.	: 3m Chamber	Data no.	: 57
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH1 2422MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 58 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

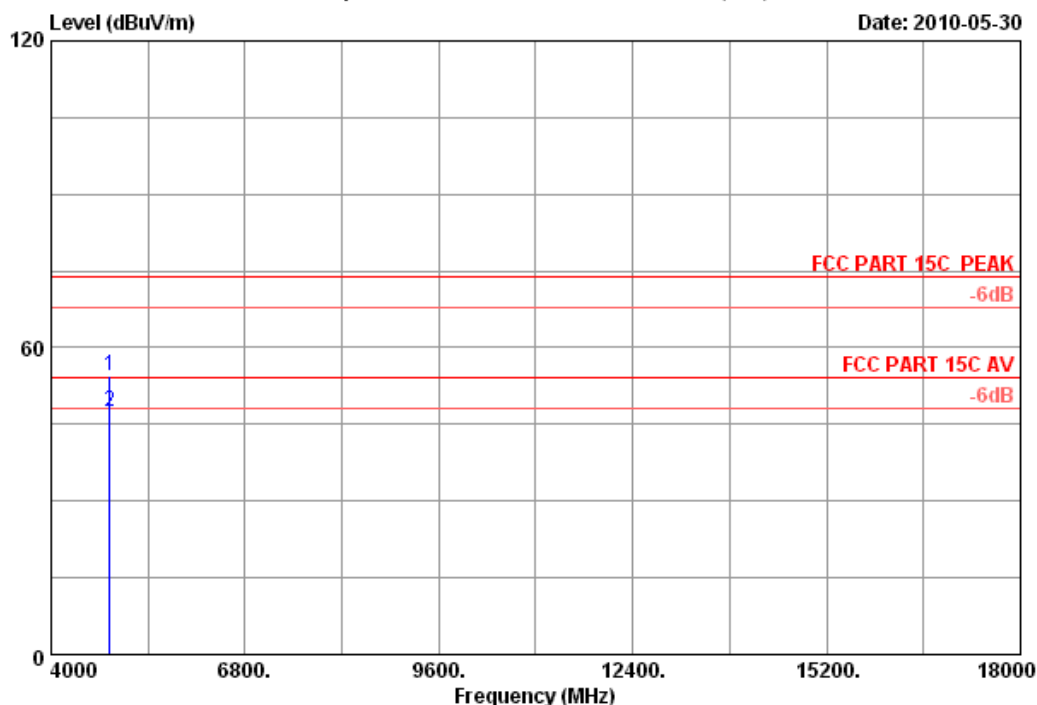

Site no. : 3m Chamber Data no. : 58
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	34.35	12.38	35.25	43.05	54.53	74.00	19.47	Peak
2	4844.000	34.35	12.38	35.25	36.15	47.63	54.00	6.37	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 59

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

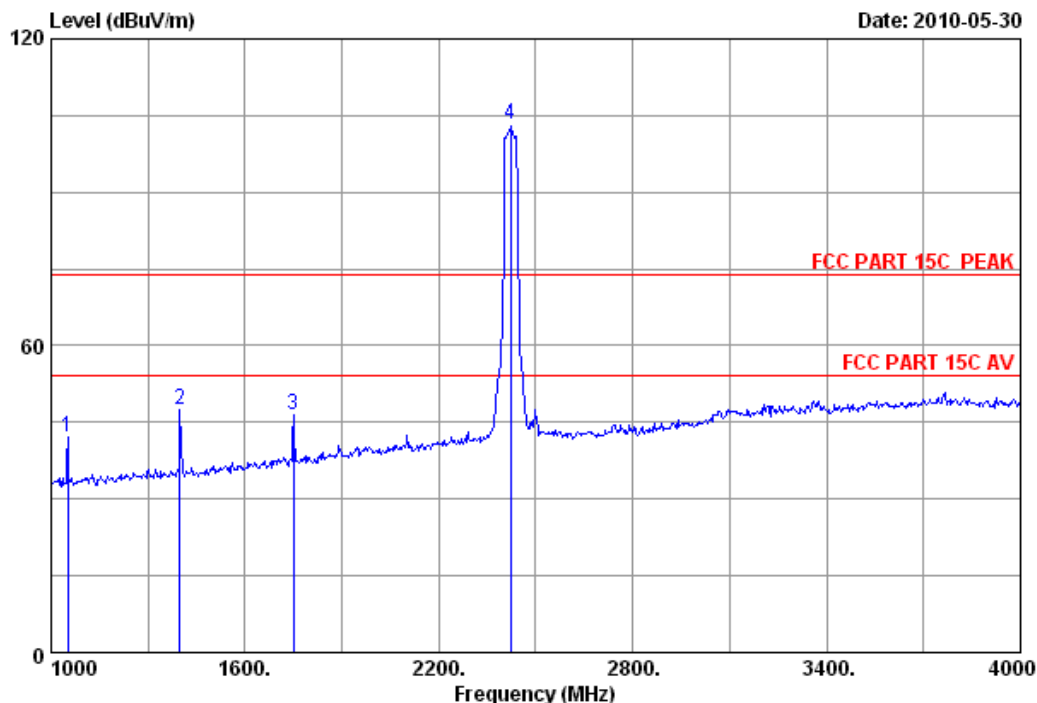

Site no. : 3m Chamber Data no. : 59
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	48.32	42.08	74.00	31.92	Peak
2	1399.000	26.19	6.49	36.69	51.49	47.48	74.00	26.52	Peak
3	1750.000	27.80	7.33	36.29	47.54	46.38	74.00	27.62	Peak
4	2422.000	29.46	8.77	36.01	101.00	103.22	74.00	-29.22	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 60 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

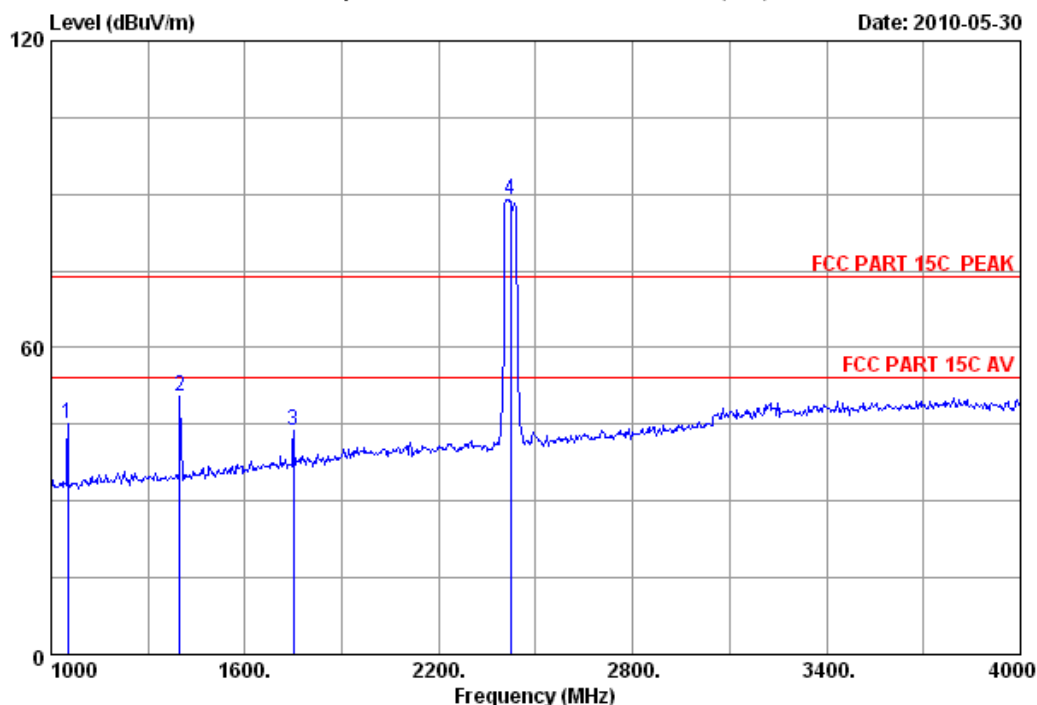

Site no. : 3m Chamber Data no. : 60
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.34	45.10	74.00	28.90	Peak
2	1399.000	26.19	6.49	36.69	54.39	50.38	74.00	23.62	Peak
3	1750.000	27.80	7.33	36.29	45.00	43.84	74.00	30.16	Peak
4	2422.000	29.46	8.77	36.01	86.84	89.06	74.00	-15.06	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 61 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

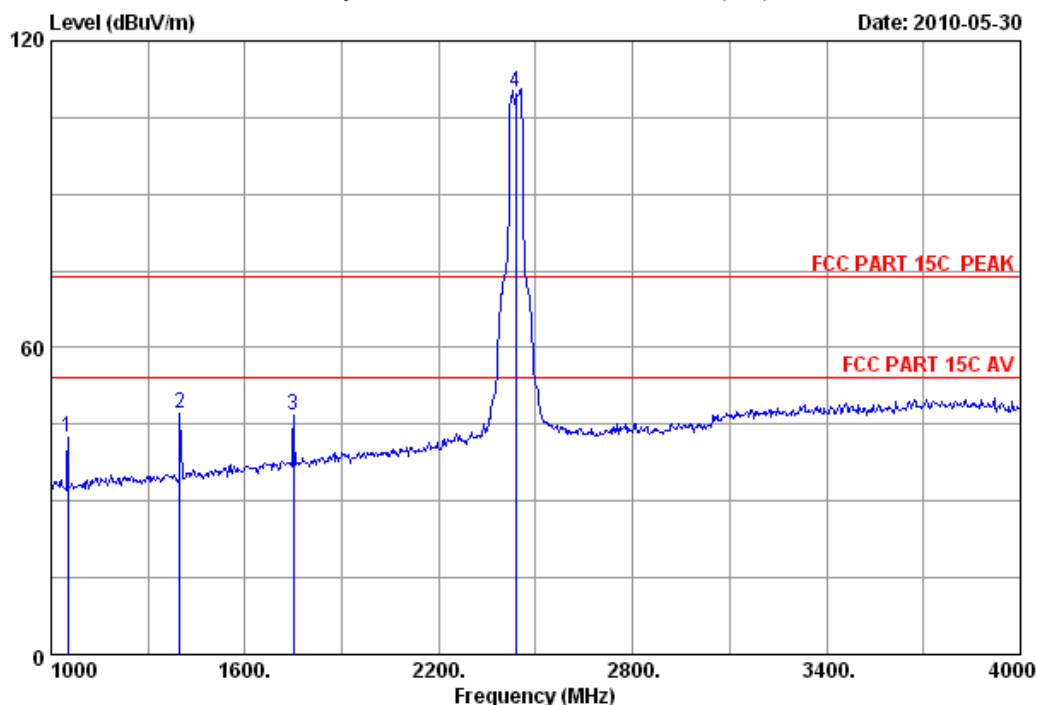

Site no. : 3m Chamber Data no. : 61
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	1051.000	25.50	5.60	37.34	48.59	42.35	74.00	31.65	Peak
2	1399.000	26.19	6.49	36.69	51.09	47.08	74.00	26.92	Peak
3	1750.000	27.80	7.33	36.29	47.93	46.77	74.00	27.23	Peak
4	2437.000	29.47	8.77	36.06	107.92	110.10	74.00	-36.10	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 62 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

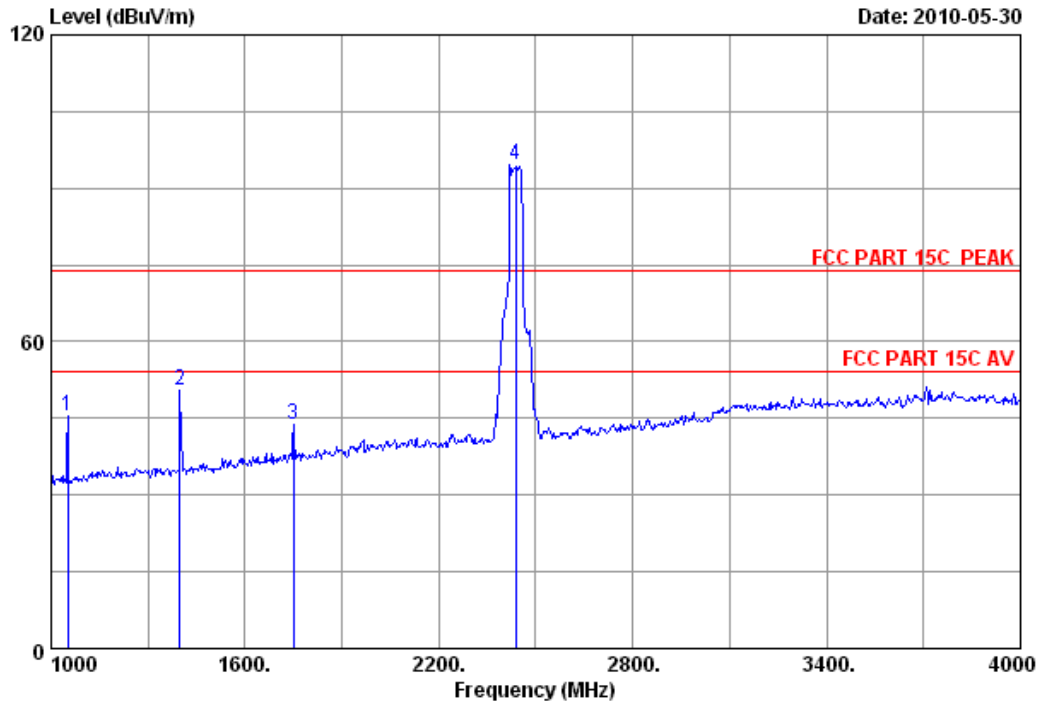

Site no. : 3m Chamber Data no. : 62
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.63	45.39	74.00	28.61	Peak
2	1399.000	26.19	6.49	36.69	54.35	50.34	74.00	23.66	Peak
3	1750.000	27.80	7.33	36.29	44.86	43.70	74.00	30.30	Peak
4	2437.000	29.47	8.77	36.06	92.36	94.54	74.00	-20.54	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 63 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

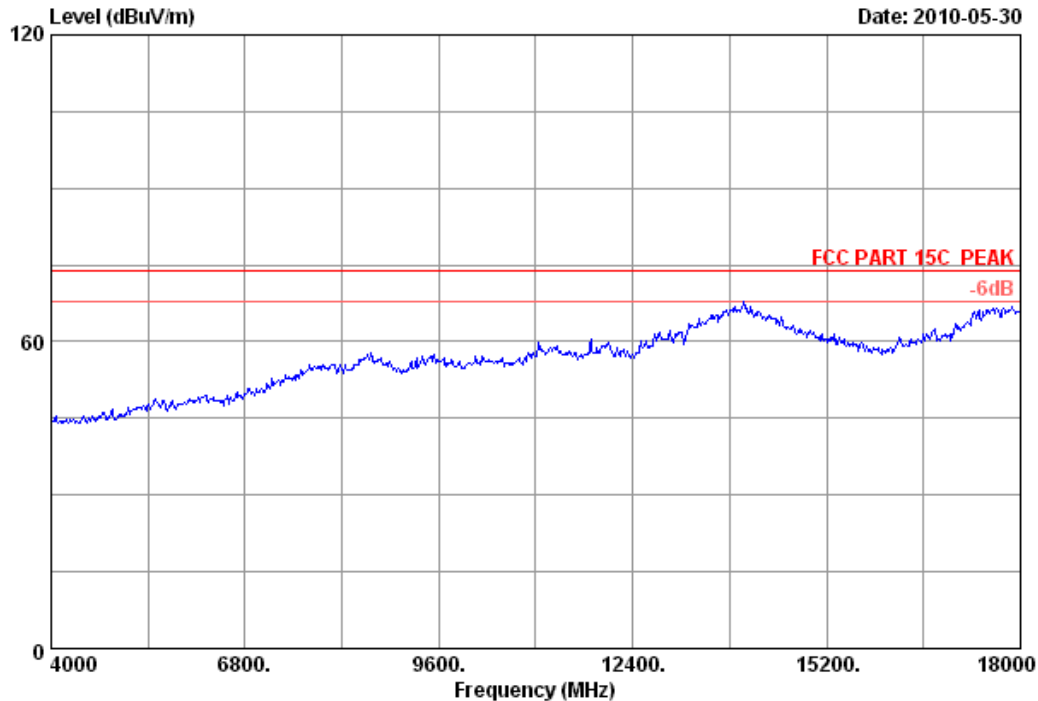


Site no.	: 3m Chamber	Data no.	: 63
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH4 2437MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 64 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

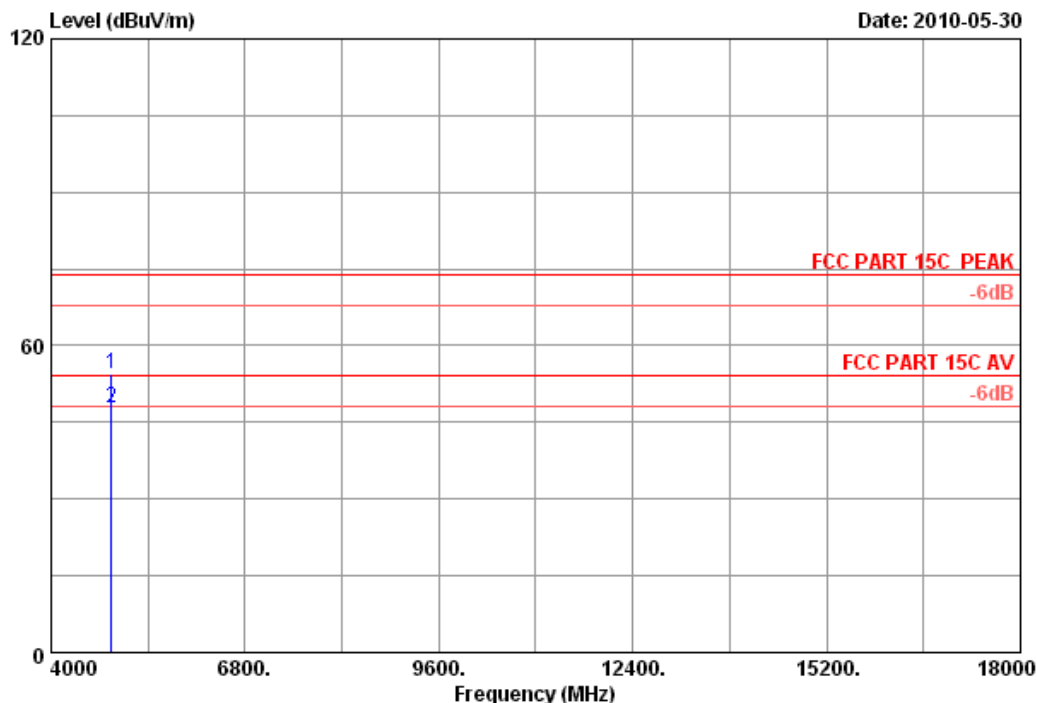

Site no. : 3m Chamber Data no. : 64
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4874.000	34.41	12.44	35.36	43.09	54.58	74.00	19.42	Peak
2	4874.000	34.41	12.44	35.36	36.19	47.68	54.00	6.32	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 65

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

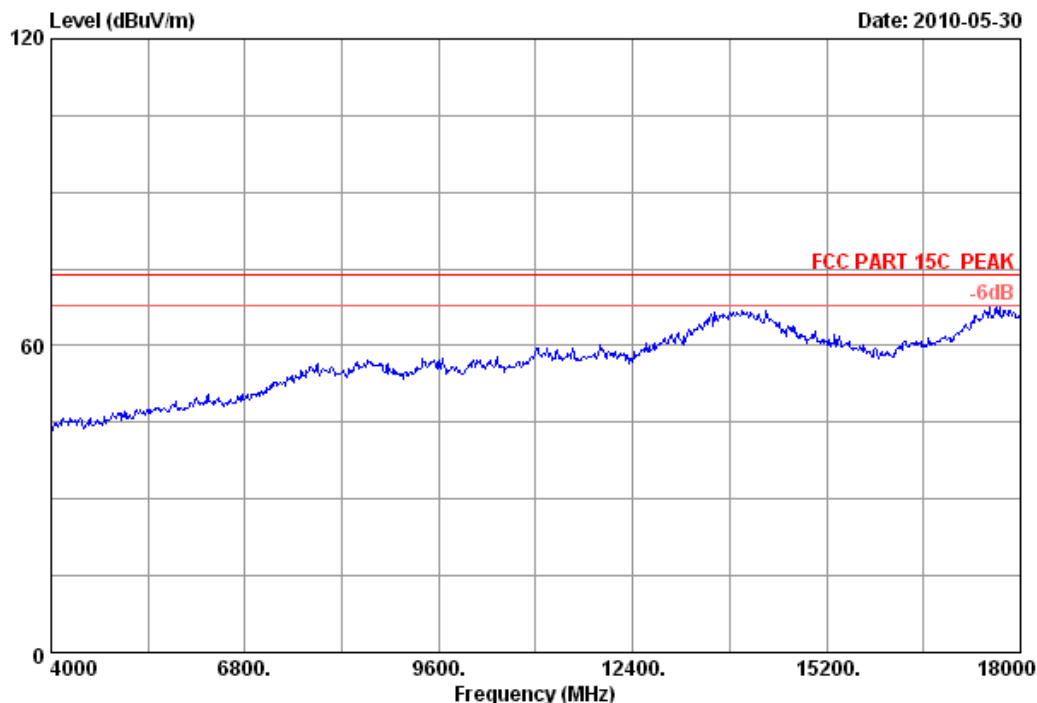


Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH4 2437MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 66 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

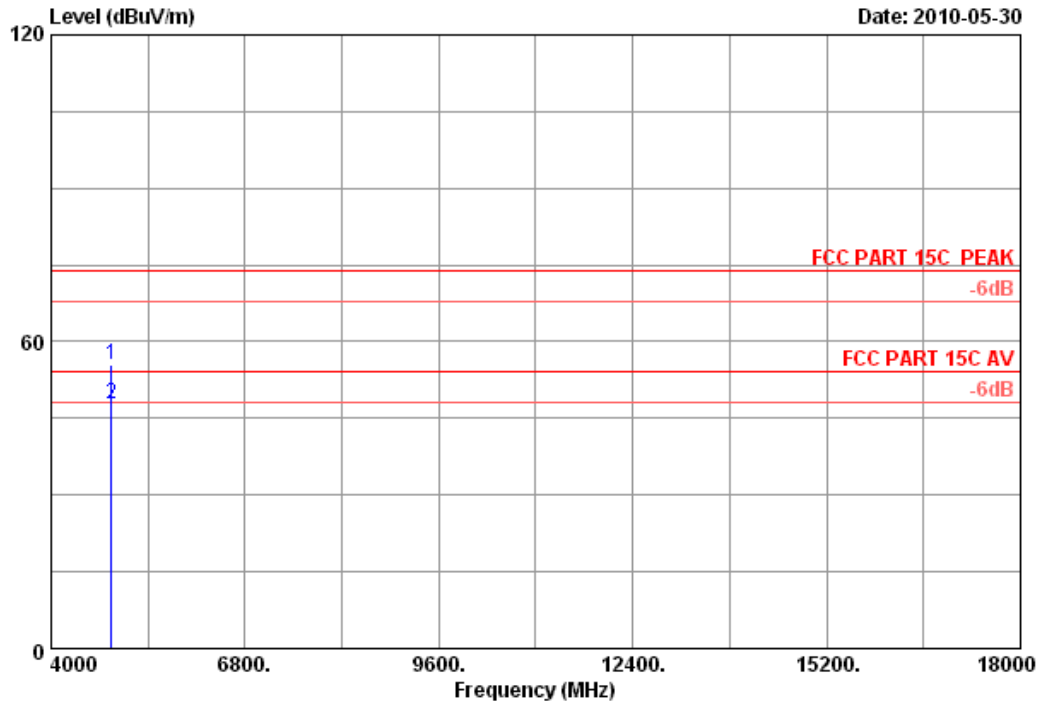

Site no. : 3m Chamber Data no. : 66
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH4 2437MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.41	12.44	35.36	44.01	55.50	74.00	18.50	Peak
2	4874.000	34.41	12.44	35.36	36.30	47.79	54.00	6.21	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 67 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

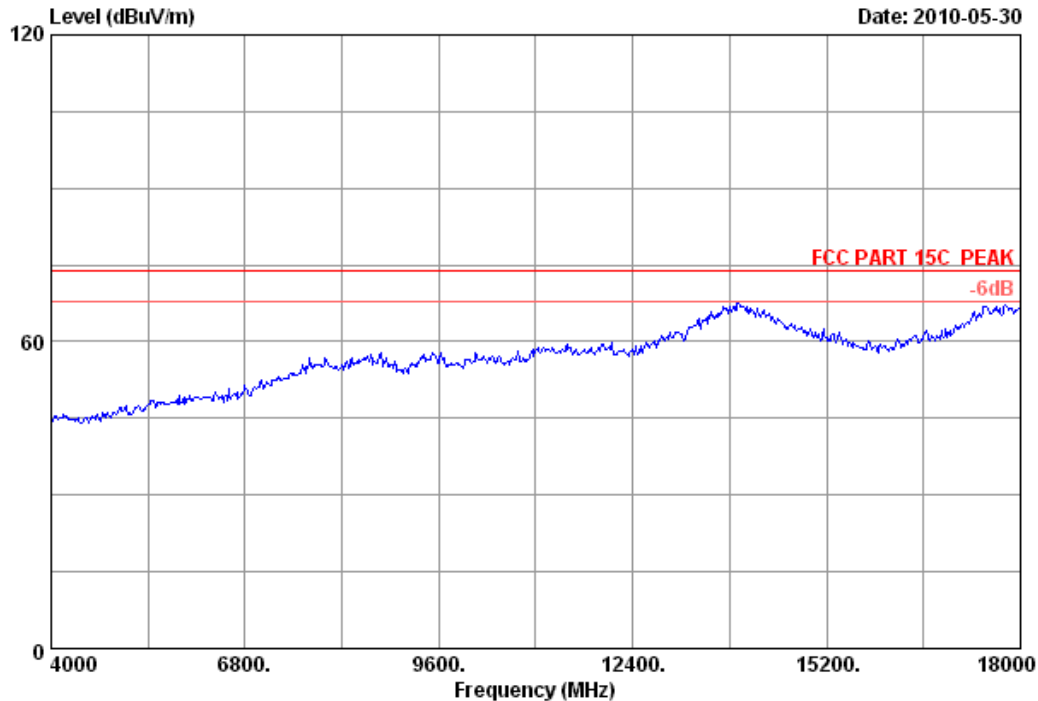


Site no.	: 3m Chamber	Data no.	: 67
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH7 2452MHz Tx		
M/N	: TL-WR743ND		



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 68 File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

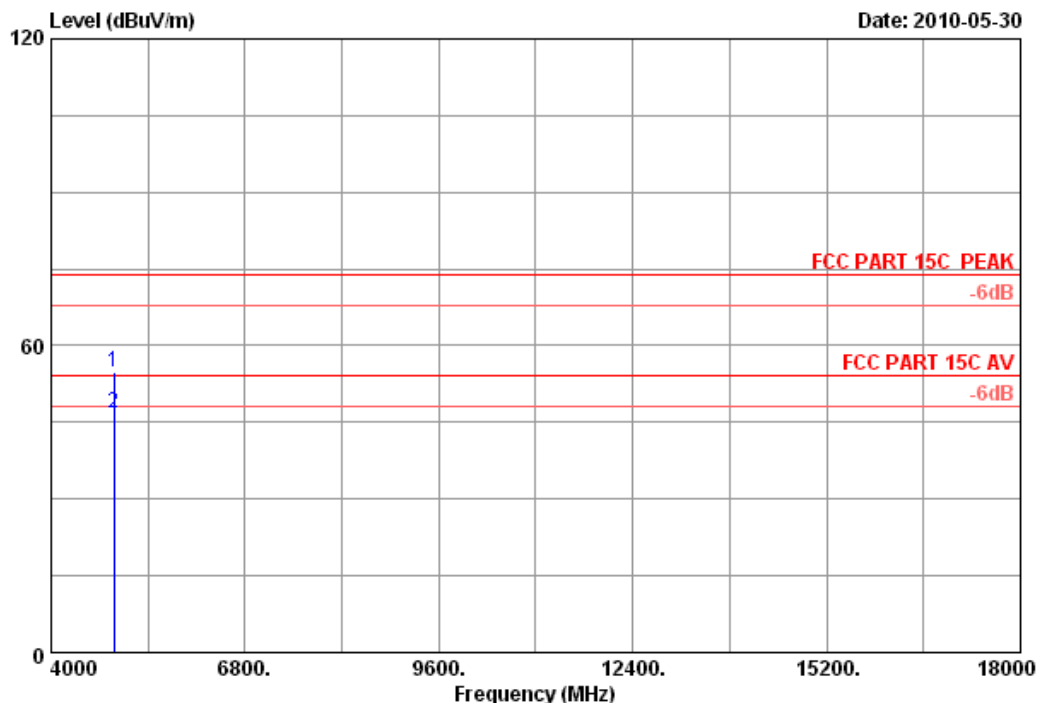

Site no. : 3m Chamber Data no. : 68
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4904.000	34.46	12.47	35.27	43.20	54.86	74.00	19.14	Peak
2	4904.000	34.46	12.47	35.27	35.28	46.94	54.00	7.06	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 69

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

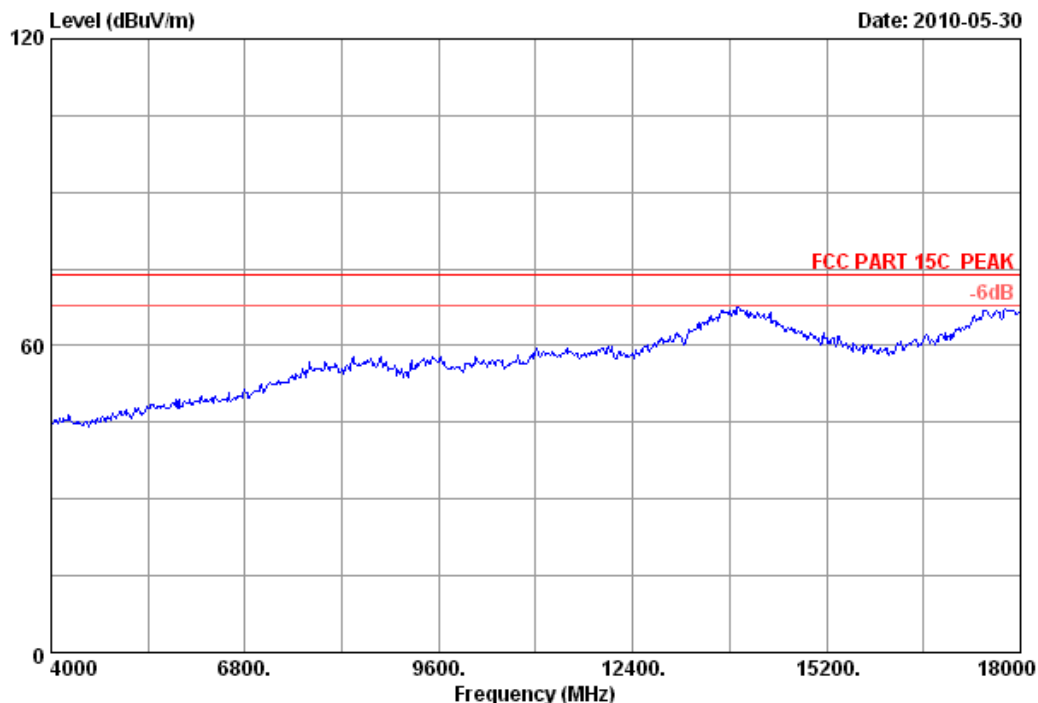

Site no.	: 3m Chamber	Data no.	: 69
Dis. / Ant.	: 3m 3115(0911)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless AP/Client Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH7 2452MHz Tx		
M/N	: TL-WR743ND		




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 70

File: E:\2010 report data\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

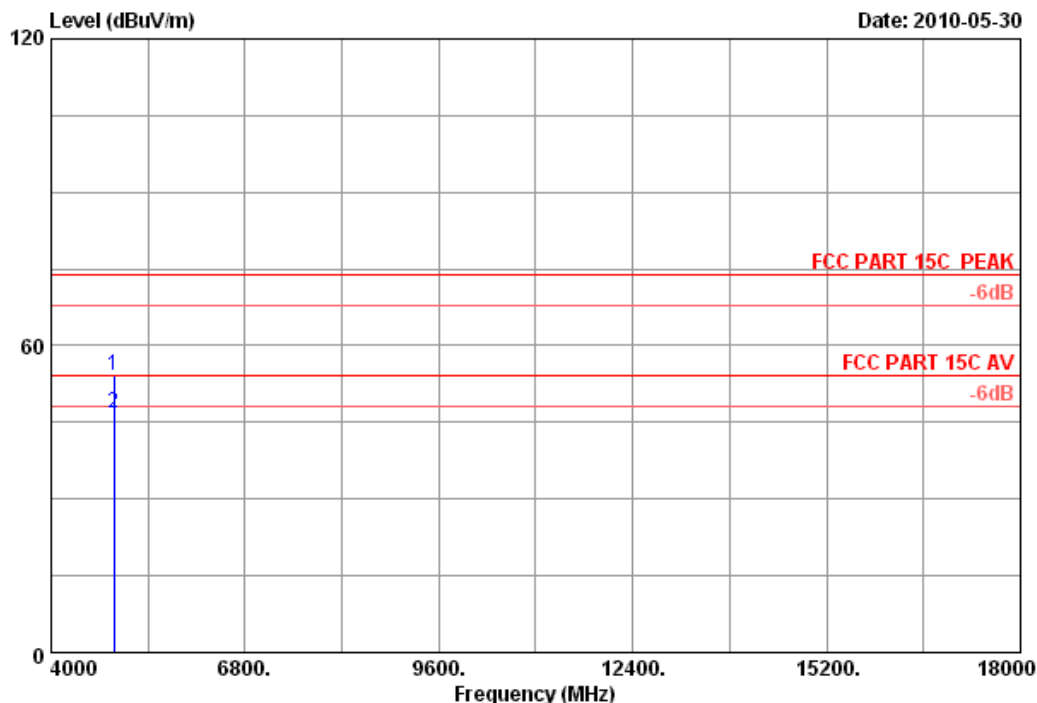

Site no. : 3m Chamber Data no. : 70
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.000	34.46	12.47	35.27	42.58	54.24	74.00	19.76	Peak
2	4904.000	34.46	12.47	35.27	35.02	46.68	54.00	7.32	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 71

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

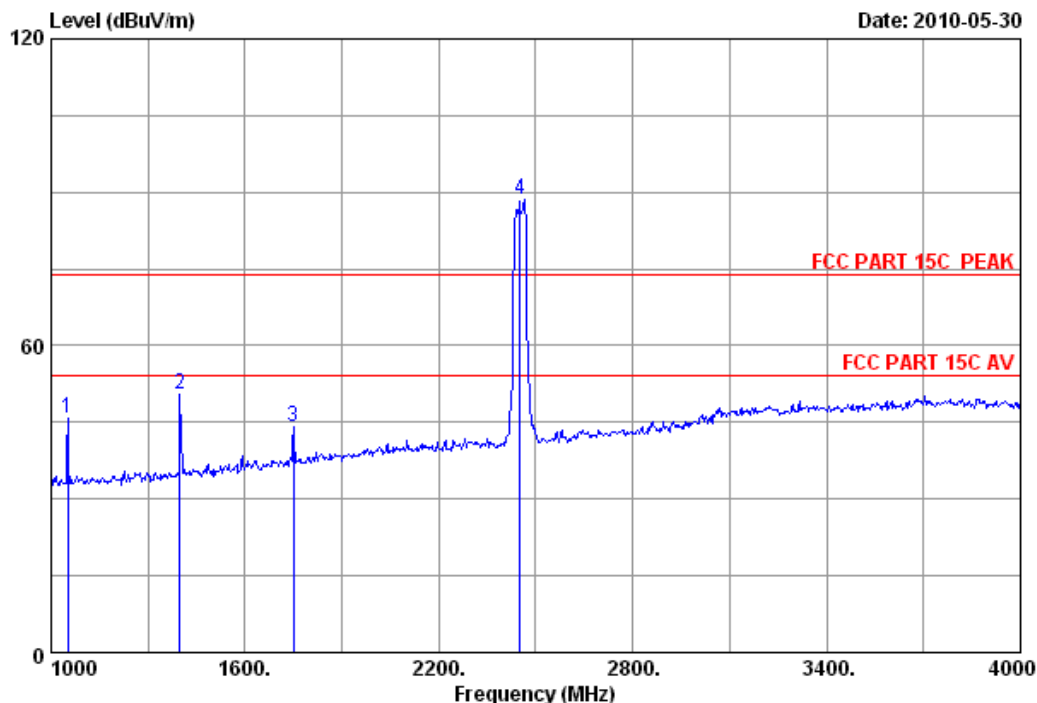

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu
 EUT : 150Mbps Wireless AP/Client Router
 Power : DC 9V From Adapter Input AC 120V/60Hz
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
 M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	51.92	45.68	74.00	28.32	Peak
2	1399.000	26.19	6.49	36.69	54.56	50.55	74.00	23.45	Peak
3	1750.000	27.80	7.33	36.29	45.34	44.18	74.00	29.82	Peak
4	2452.000	29.47	8.82	36.06	86.50	88.73	74.00	-14.73	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 72

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

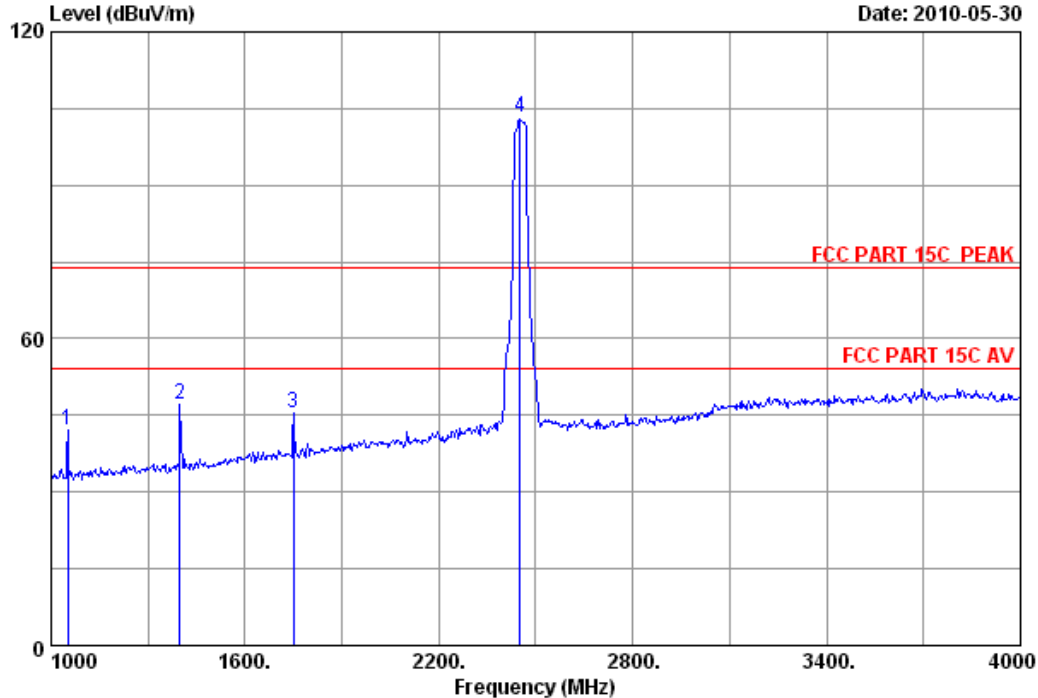

Site no. : 3m Chamber Data no. : 72
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1051.000	25.50	5.60	37.34	48.48	42.24	74.00	31.76	Peak
2	1399.000	26.19	6.49	36.69	51.00	46.99	74.00	27.01	Peak
3	1750.000	27.80	7.33	36.29	46.66	45.50	74.00	28.50	Peak
4	2452.000	29.47	8.82	36.06	101.03	103.26	74.00	-29.26	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,10	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,10	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,10	1Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

5.3. Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer by 20dB attenuator.
- 2, Measure all the conducted emissions from antenna port by spectrum analyzer as below set:

RBW=100KHz; VBW=300KHz; Detector: Peak; Sweep time: Auto

Note: The cable loss and attenuator loss were offset into spectrum analyzer as an amplitude offset.



5.4.Test result



EUT: 150Mbps Wireless AP/Client Router		
M/N: TL-WR743ND		
Test date:2010-06-02	Pressure: 100.6kpa	Humidity: 56 %
Tested by: Sunny-Lu	Test site: RF site	Temperature : 25℃


Cable loss: 0.6dB		Attenuator loss: 20dB	Antenna Gain: 5.0dBi
Test Mode	CH	Result	
11b	CH1	PASS	
	CH6	PASS	
	CH11	PASS	
11g	CH1	PASS	
	CH6	PASS	
	CH11	PASS	
11n HT20	CH1	PASS	
	CH6	PASS	
	CH11	PASS	
11n HT40	CH1	PASS	
	CH4	PASS	
	CH7	PASS	
Note: See below original test data.			

Conducted emission test data:


Test Mode: IEEE 802.11b TX

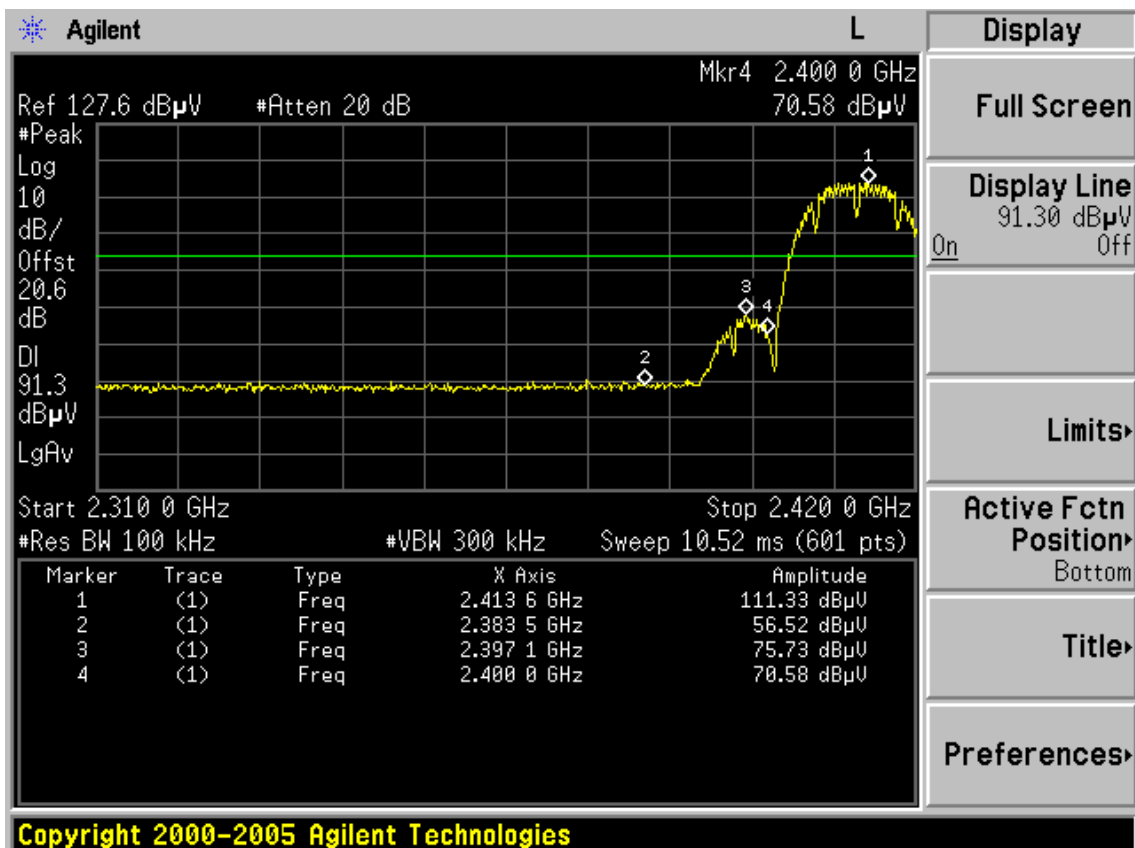
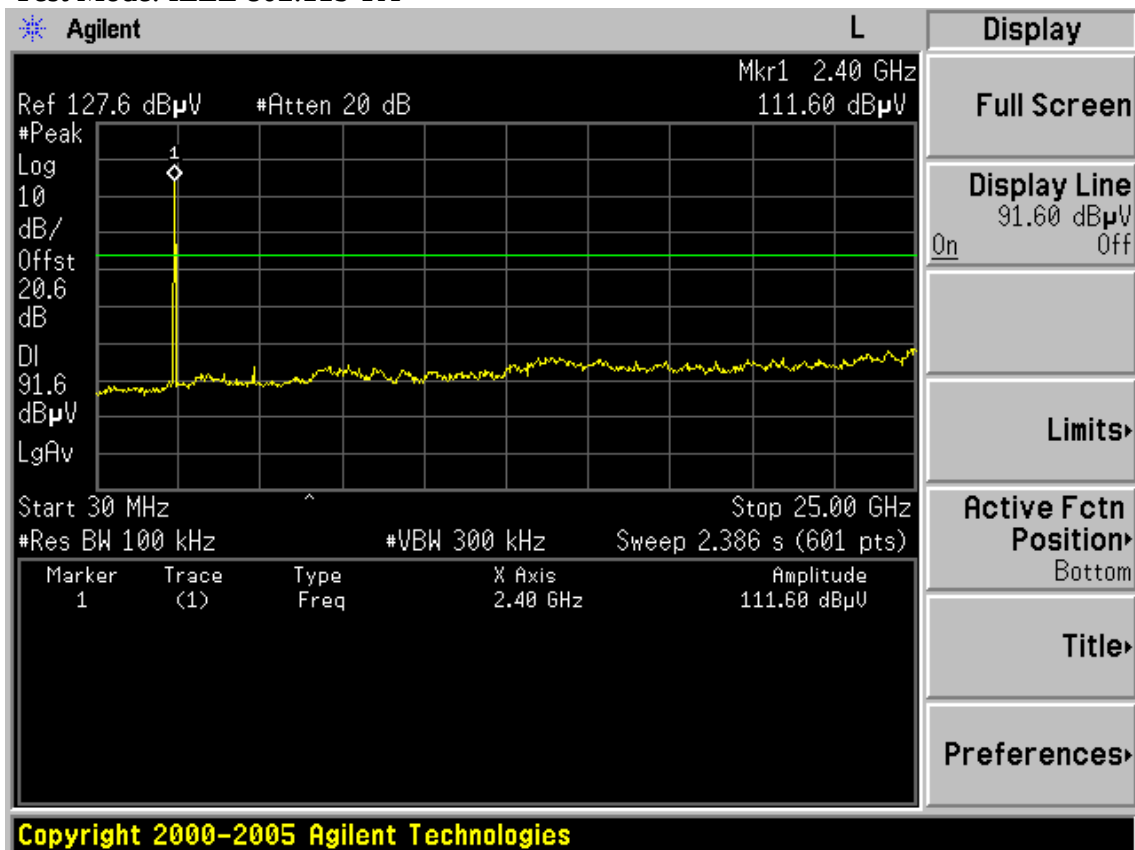


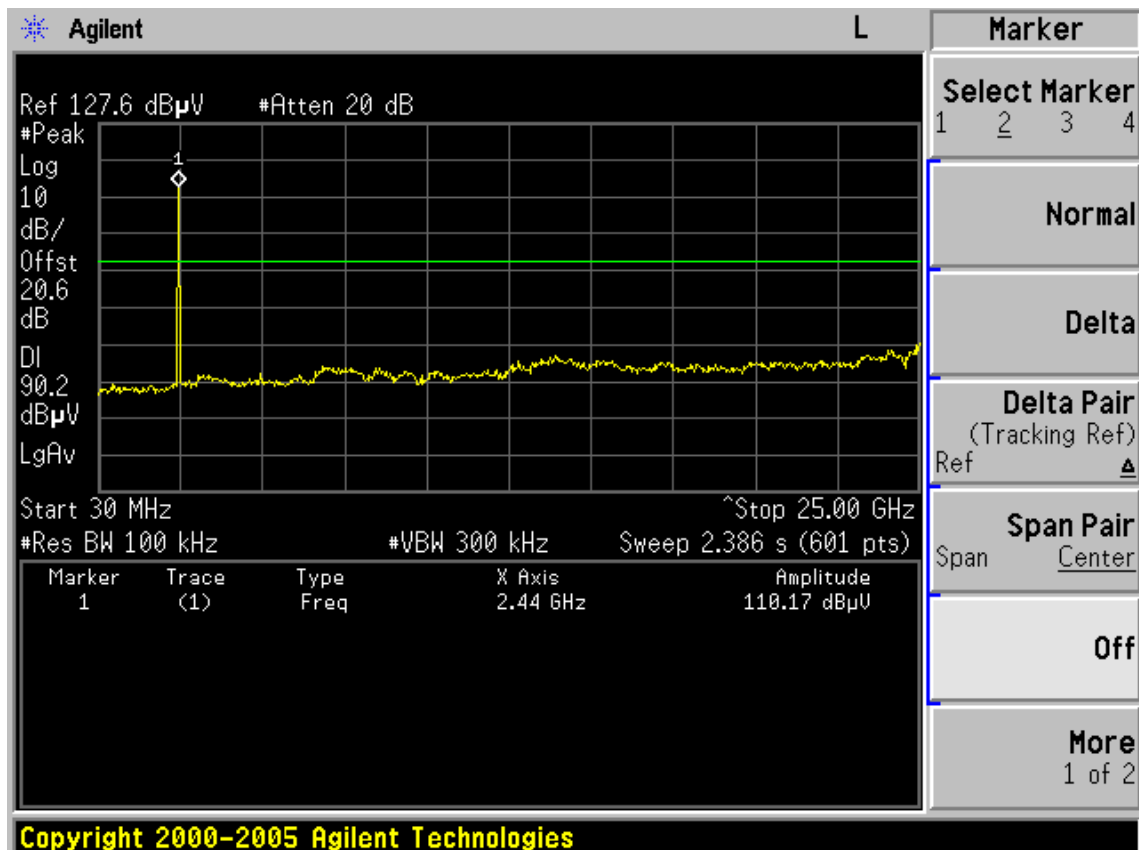
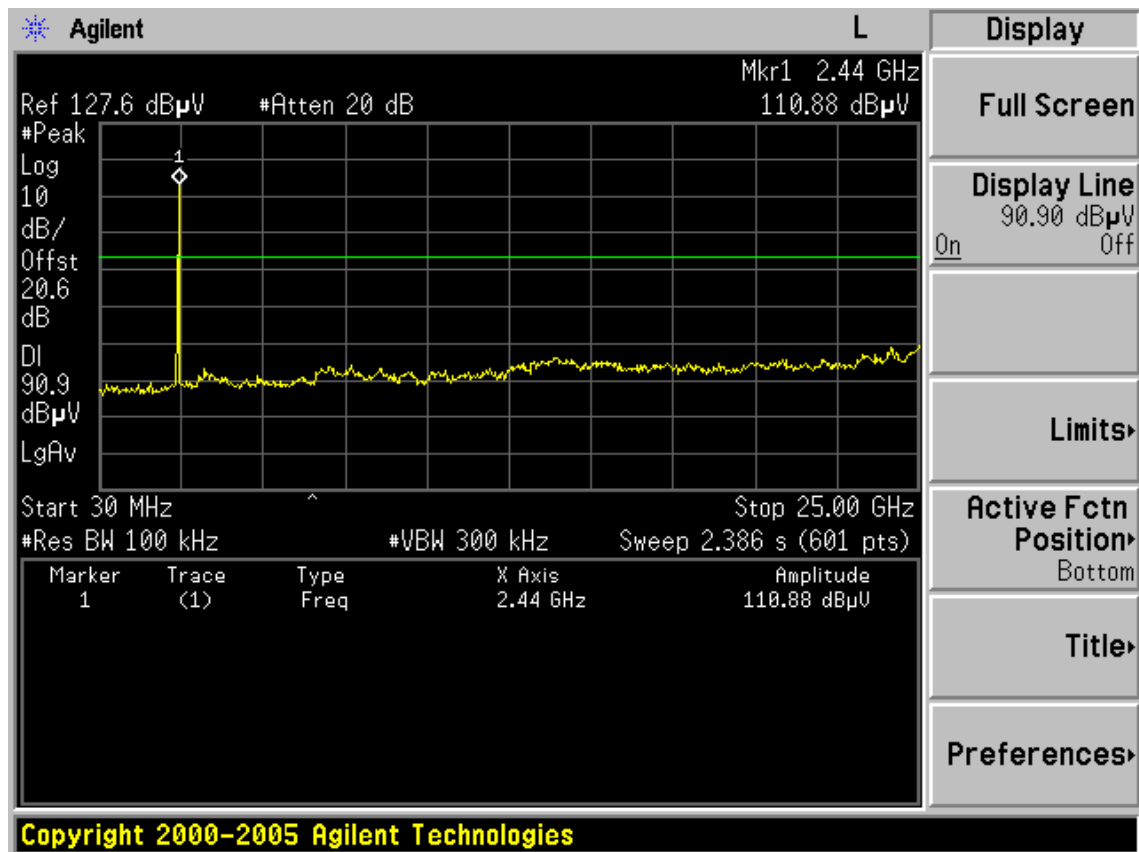


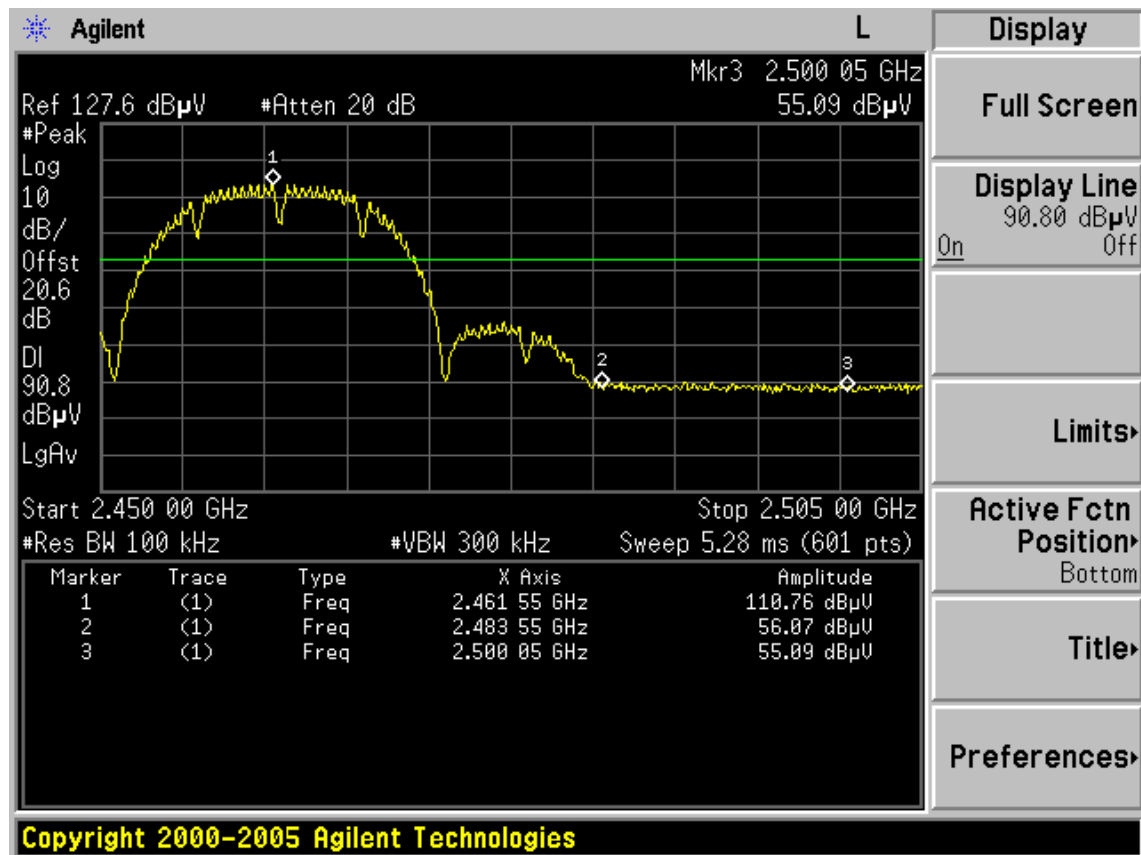



Test Mode: IEEE 802.11g TX


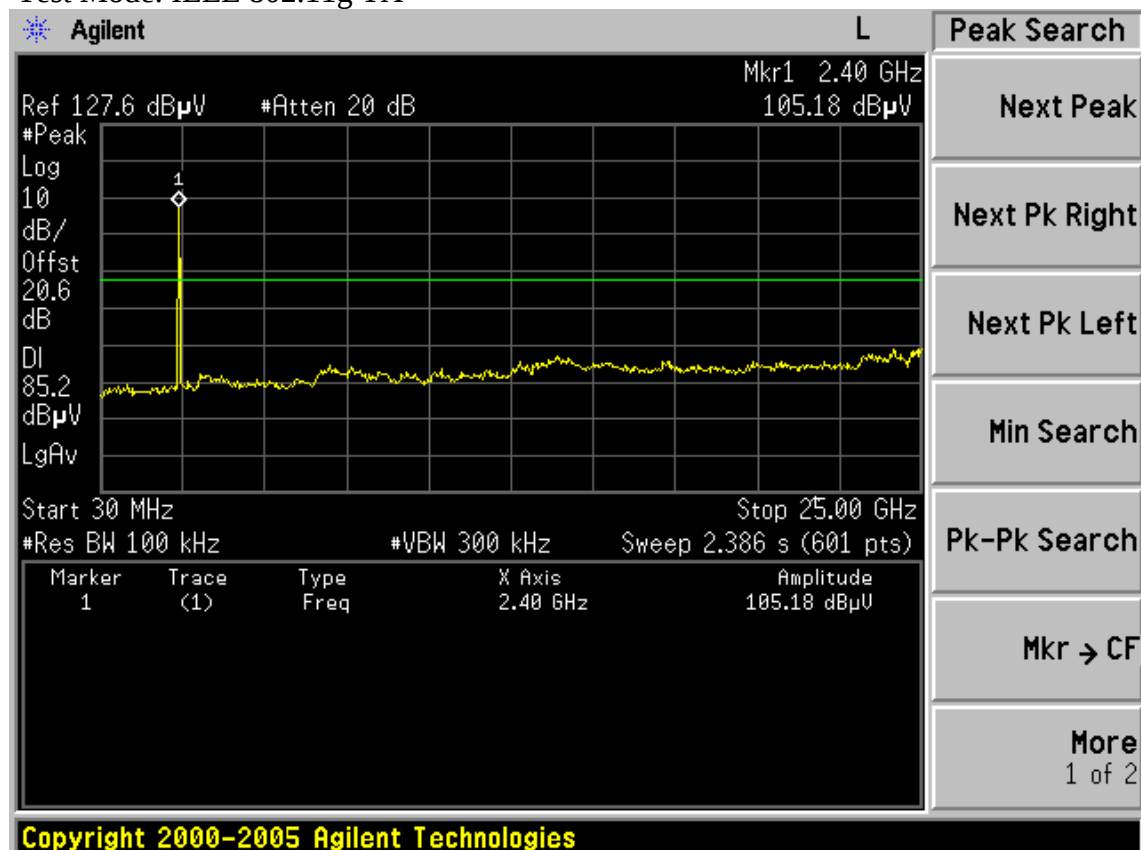


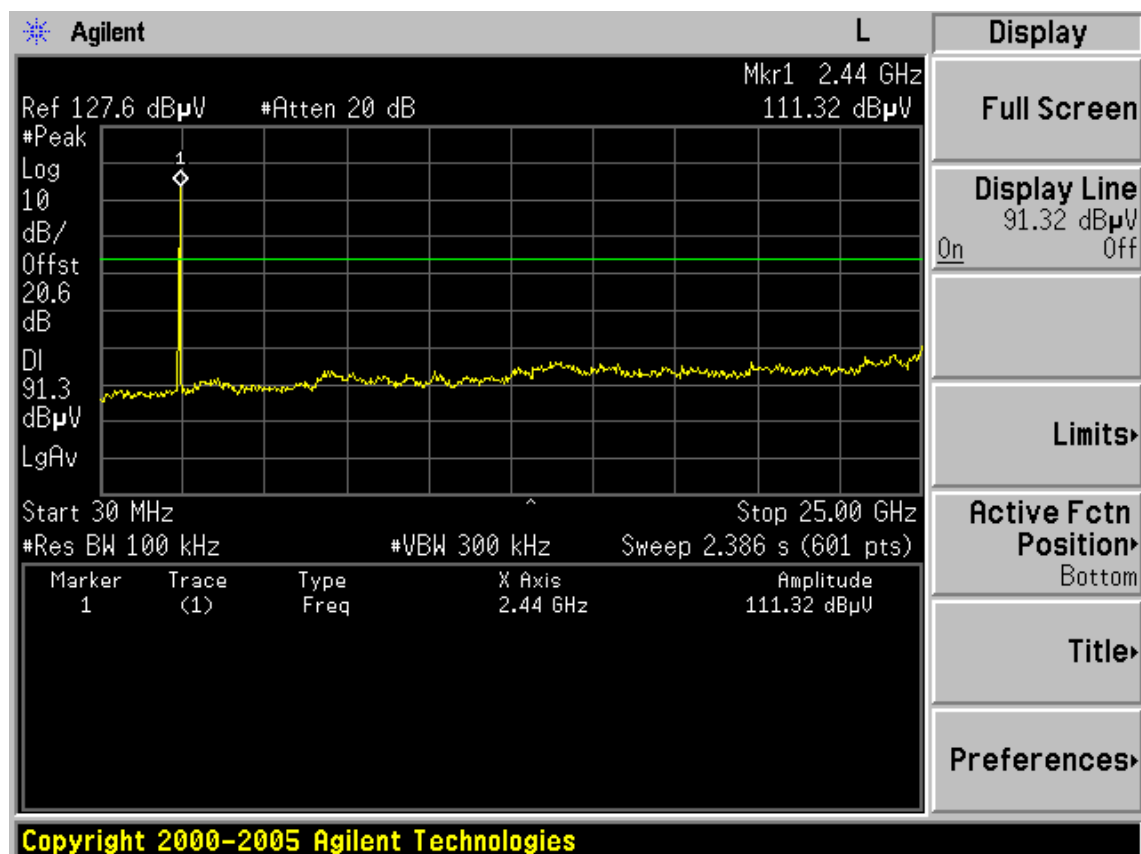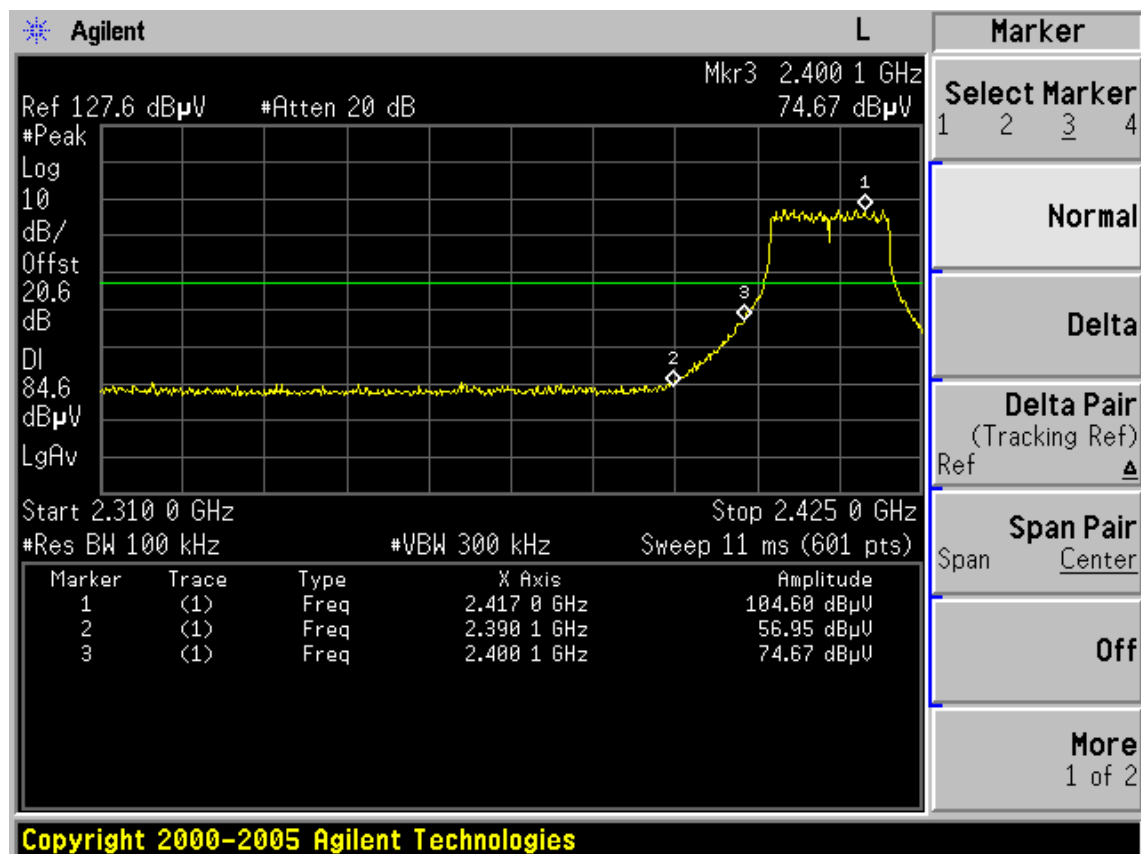


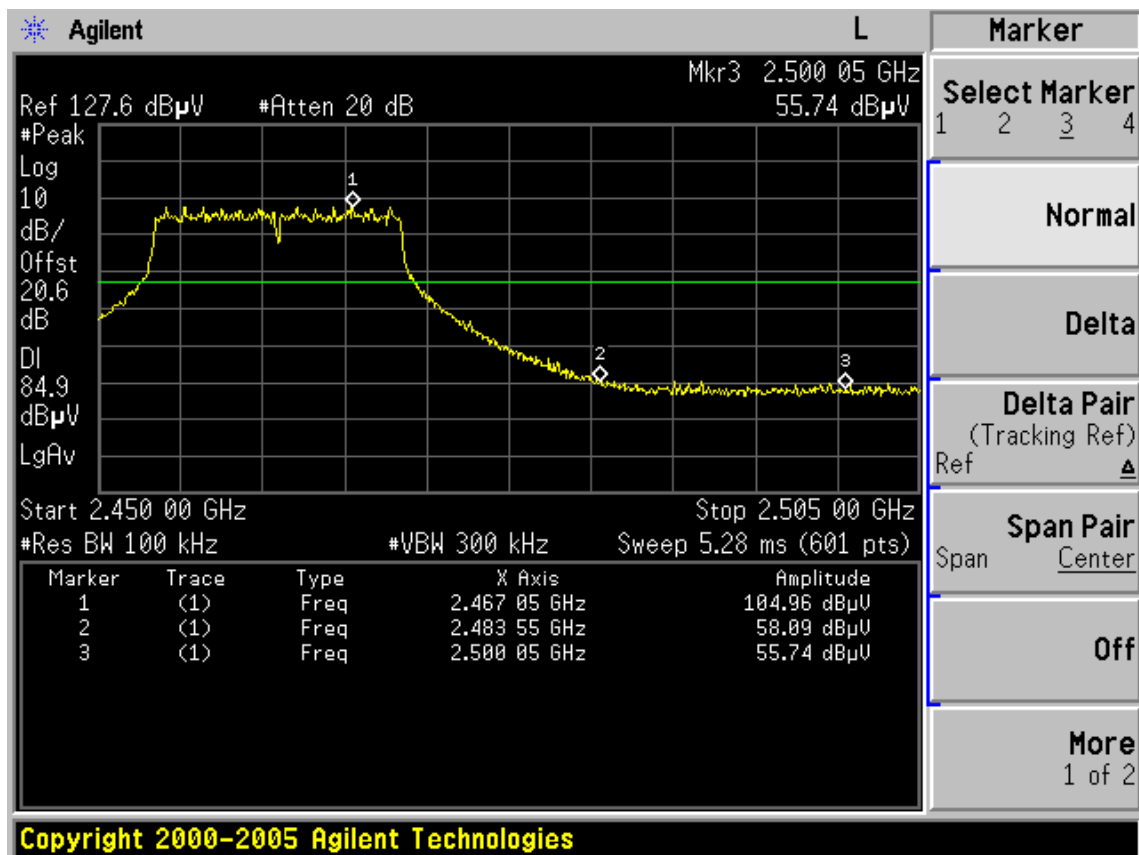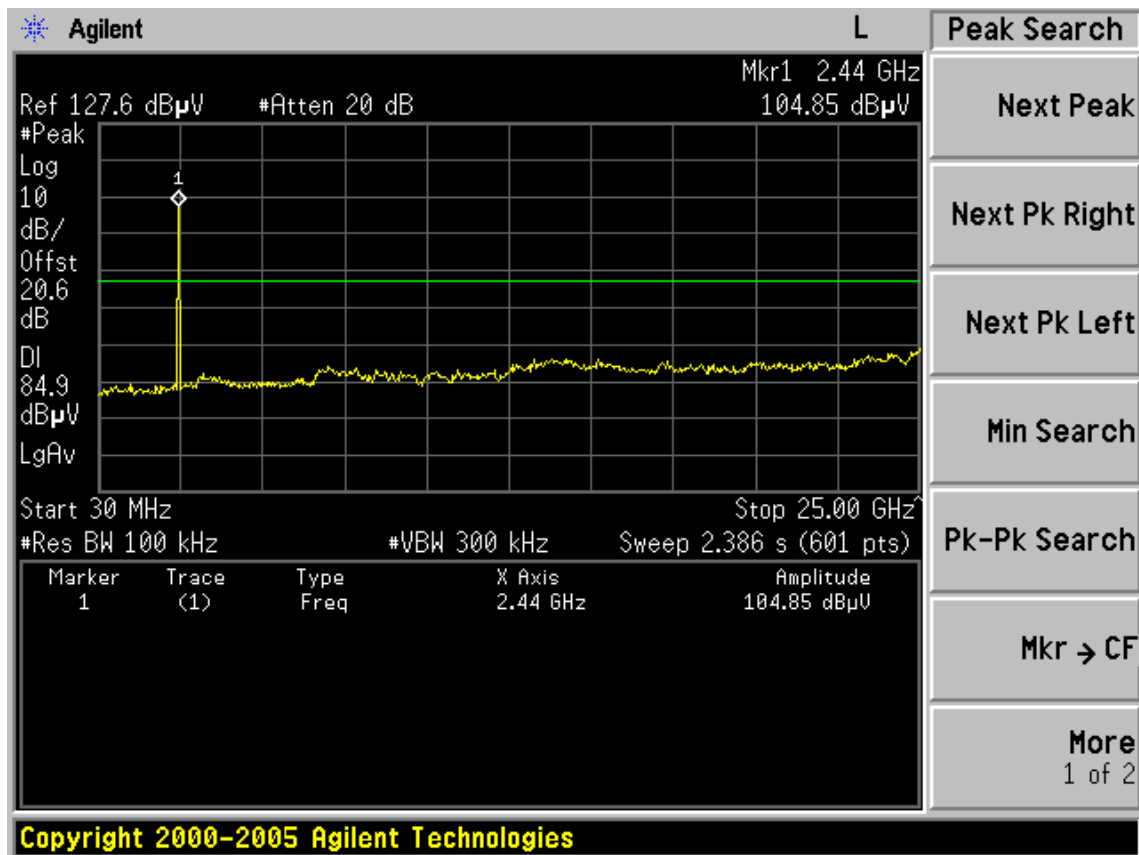


Test Mode: IEEE 802.11n HT20 TX

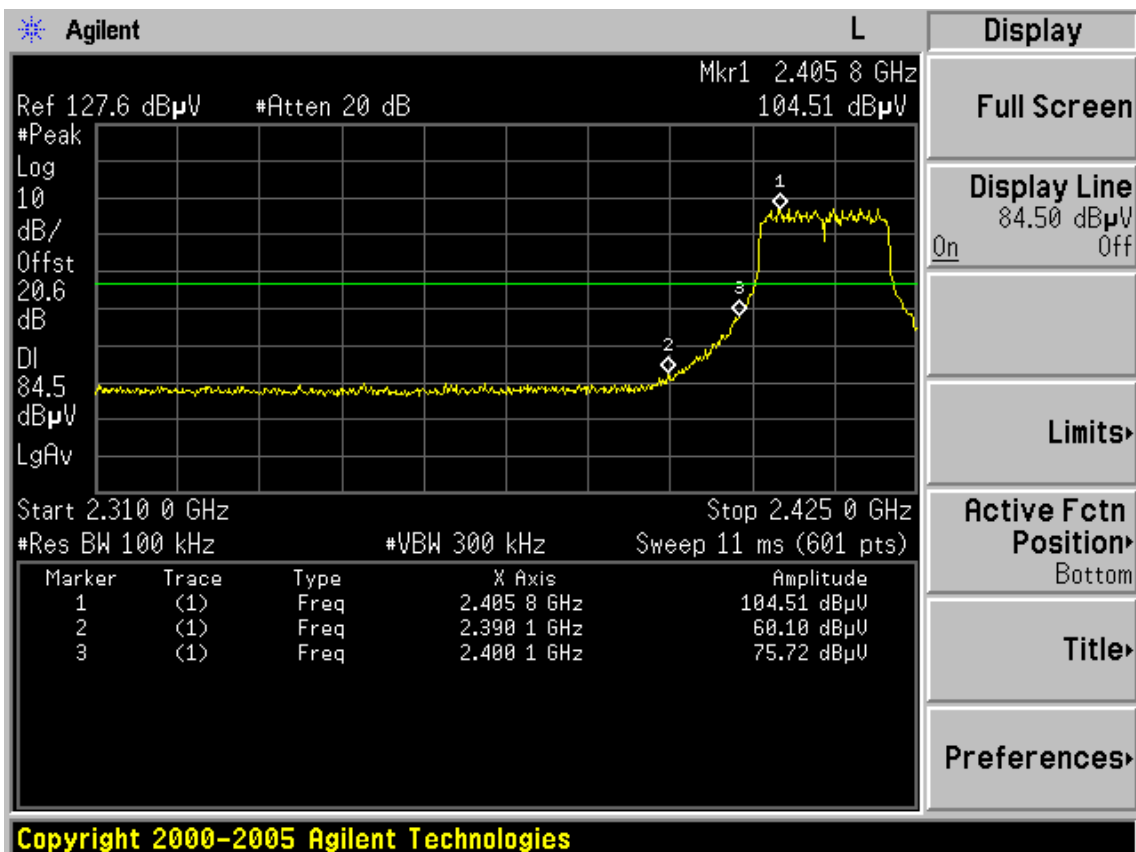
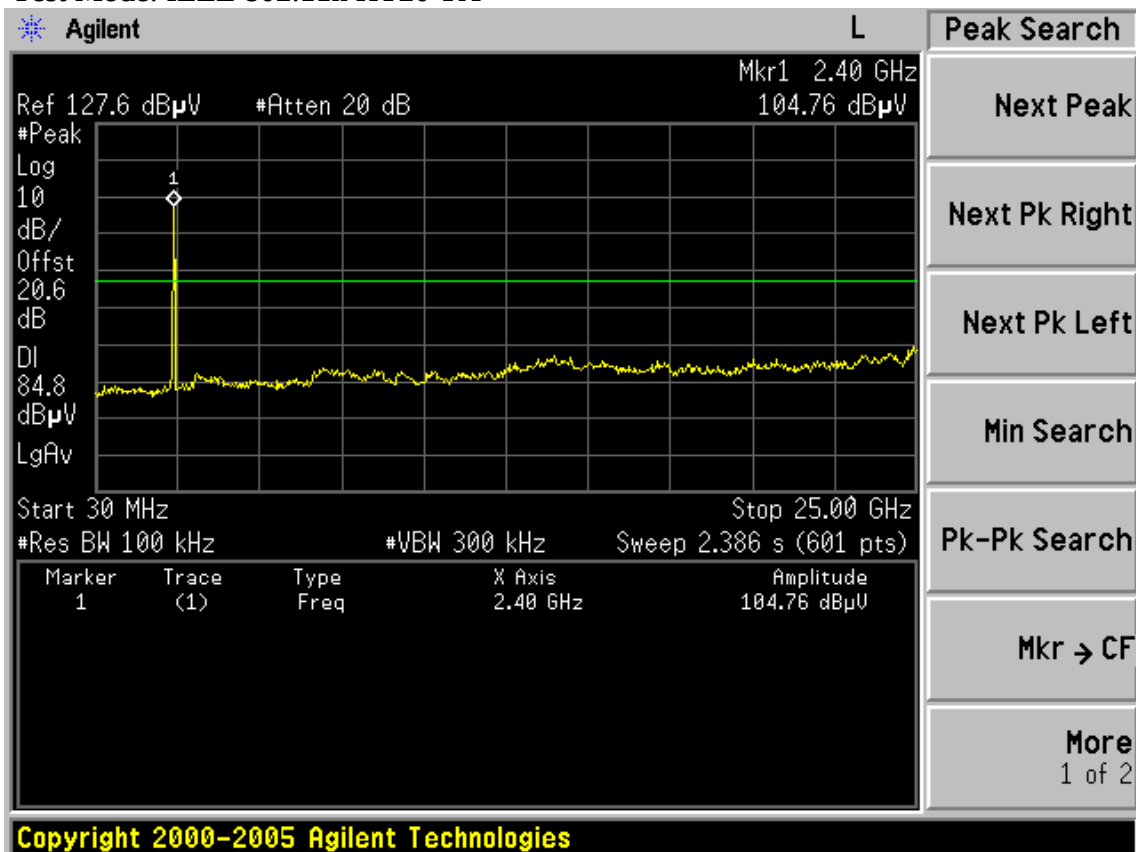


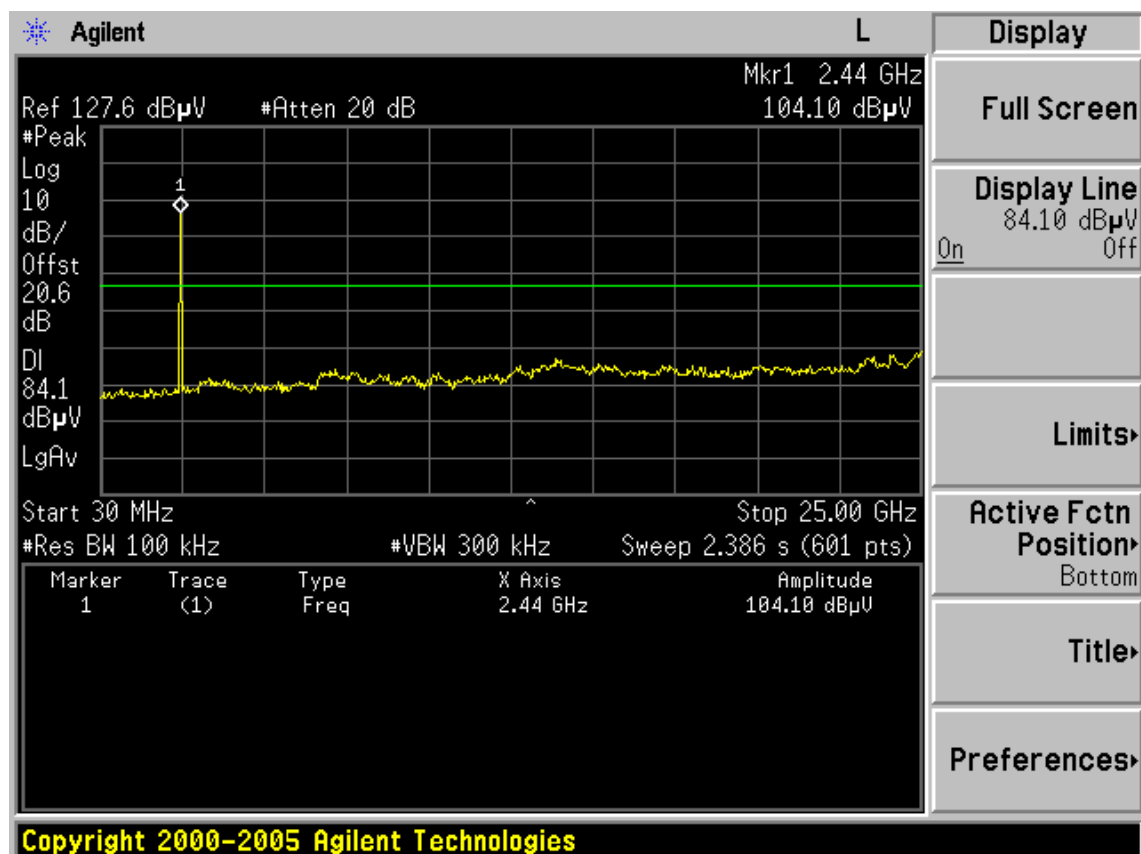
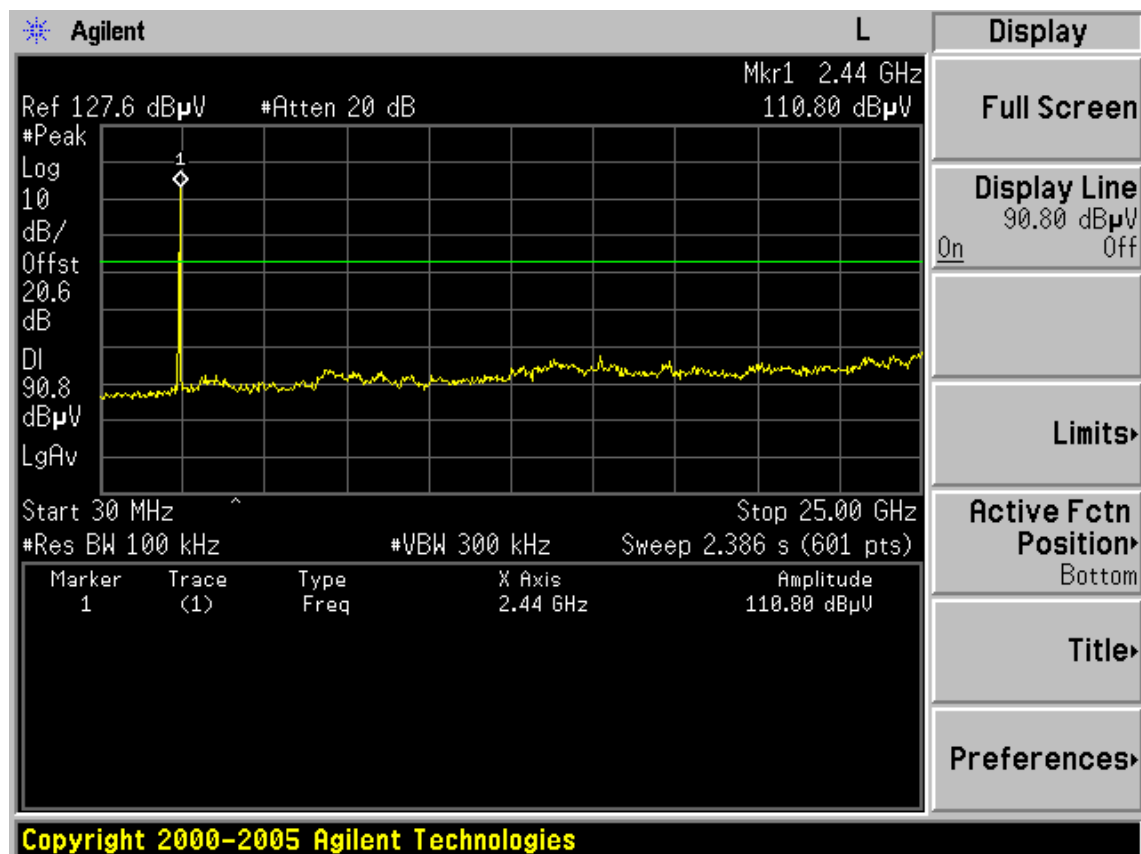


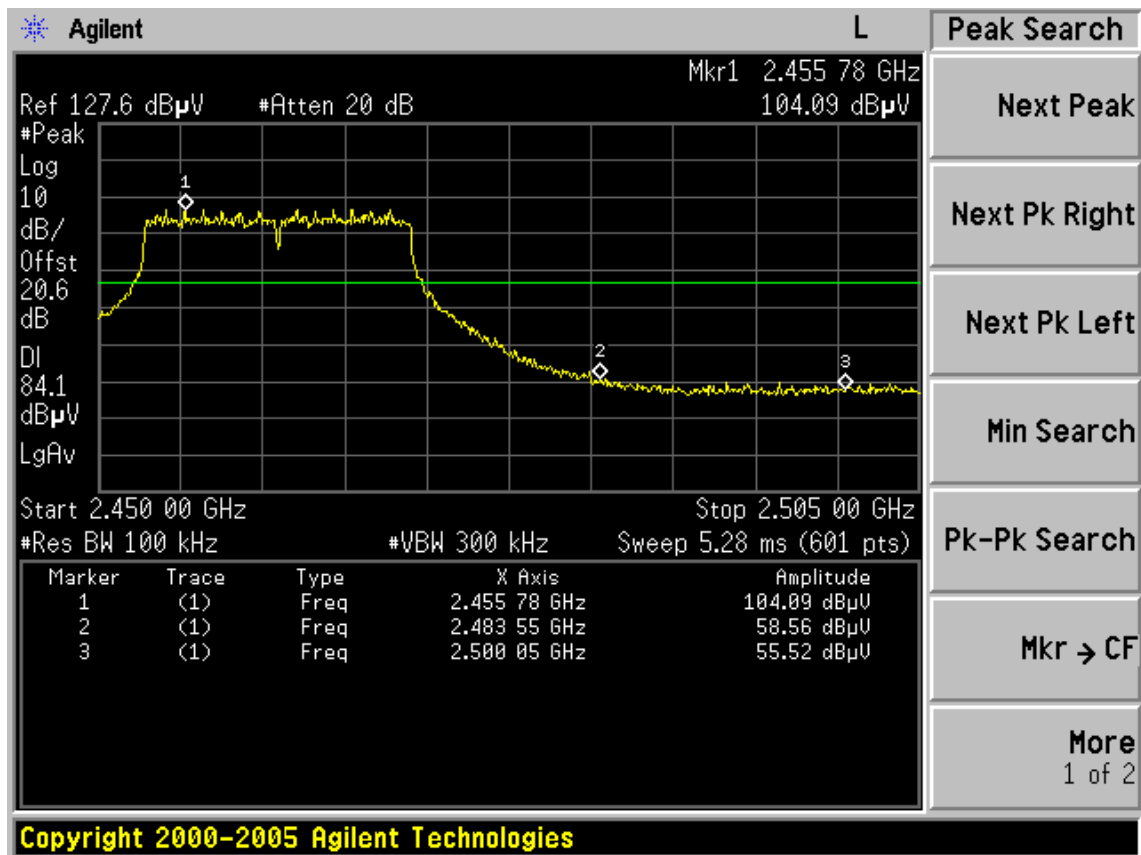

Test Mode: IEEE 802.11n HT40 TX

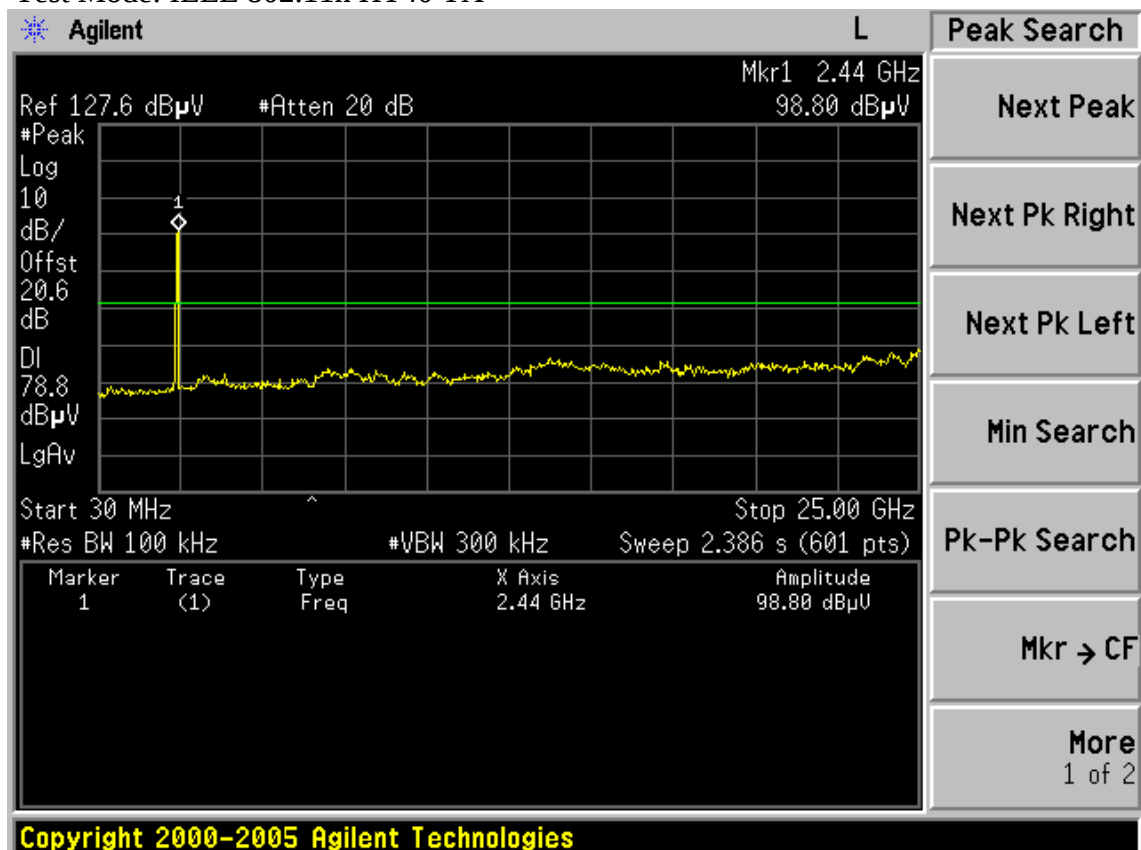

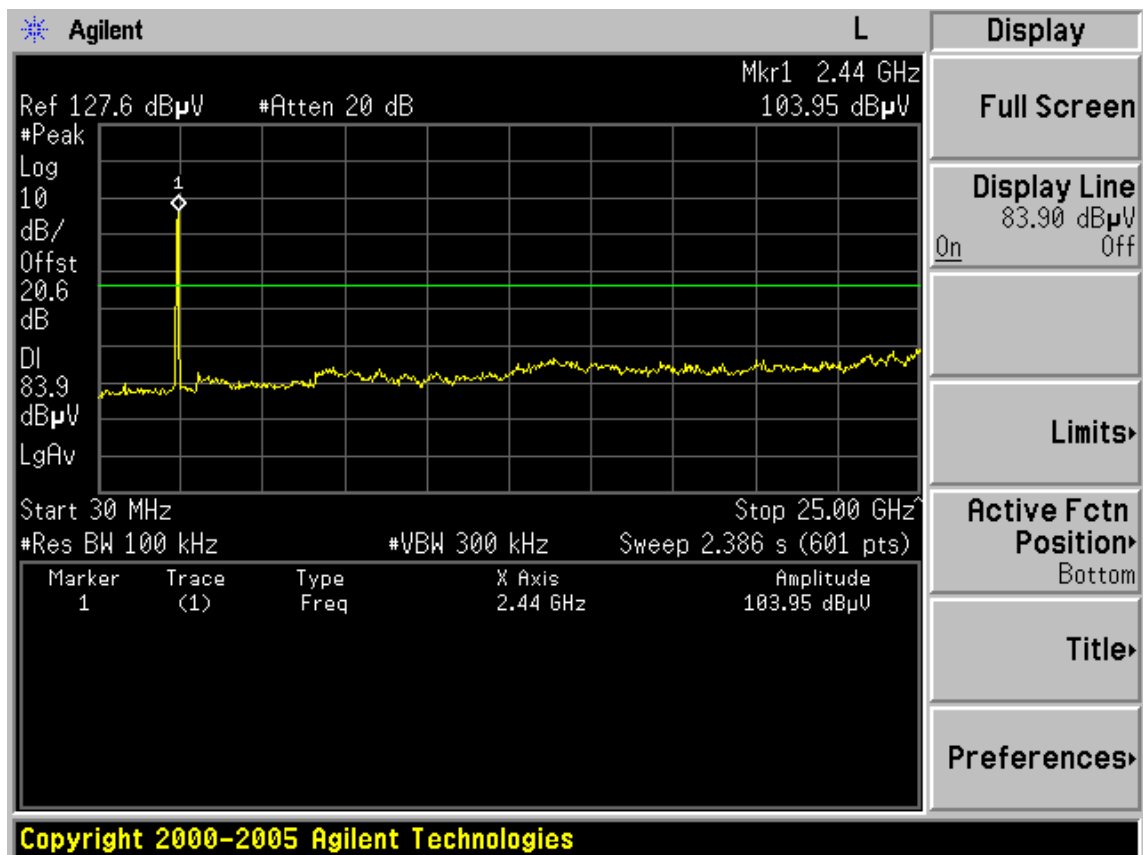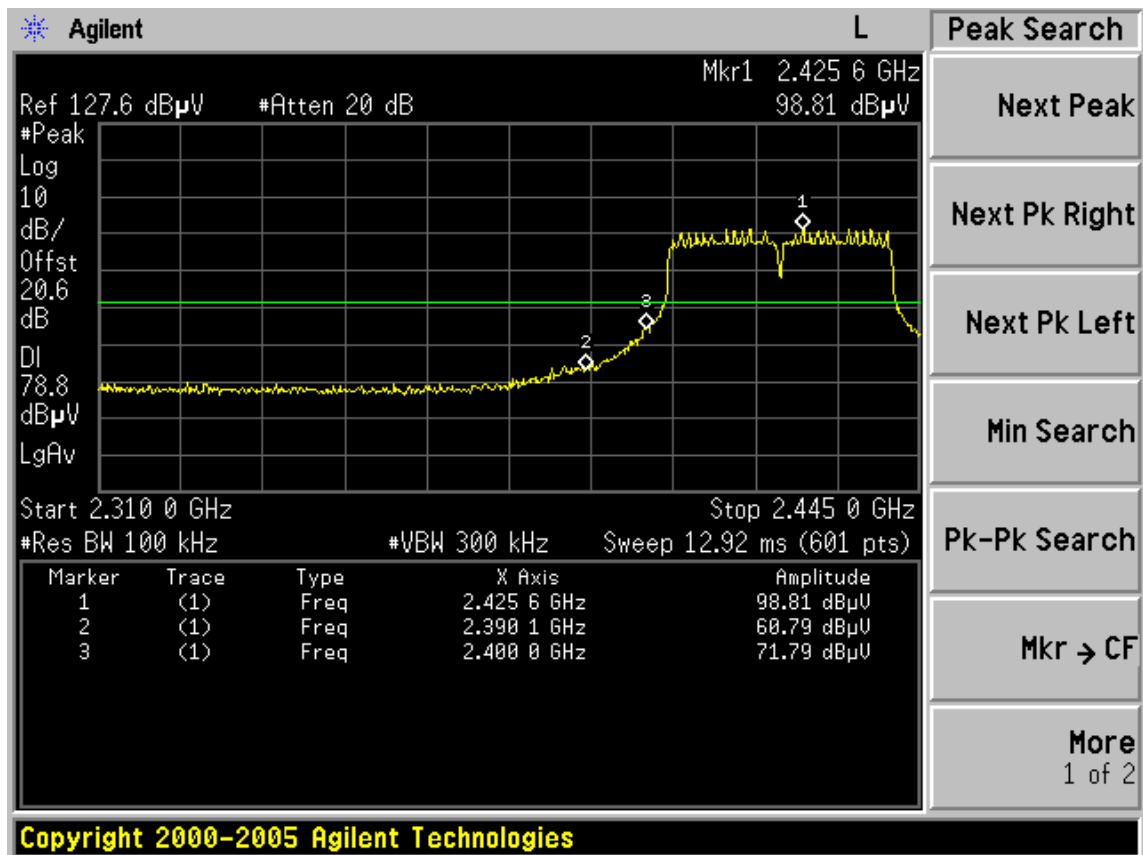

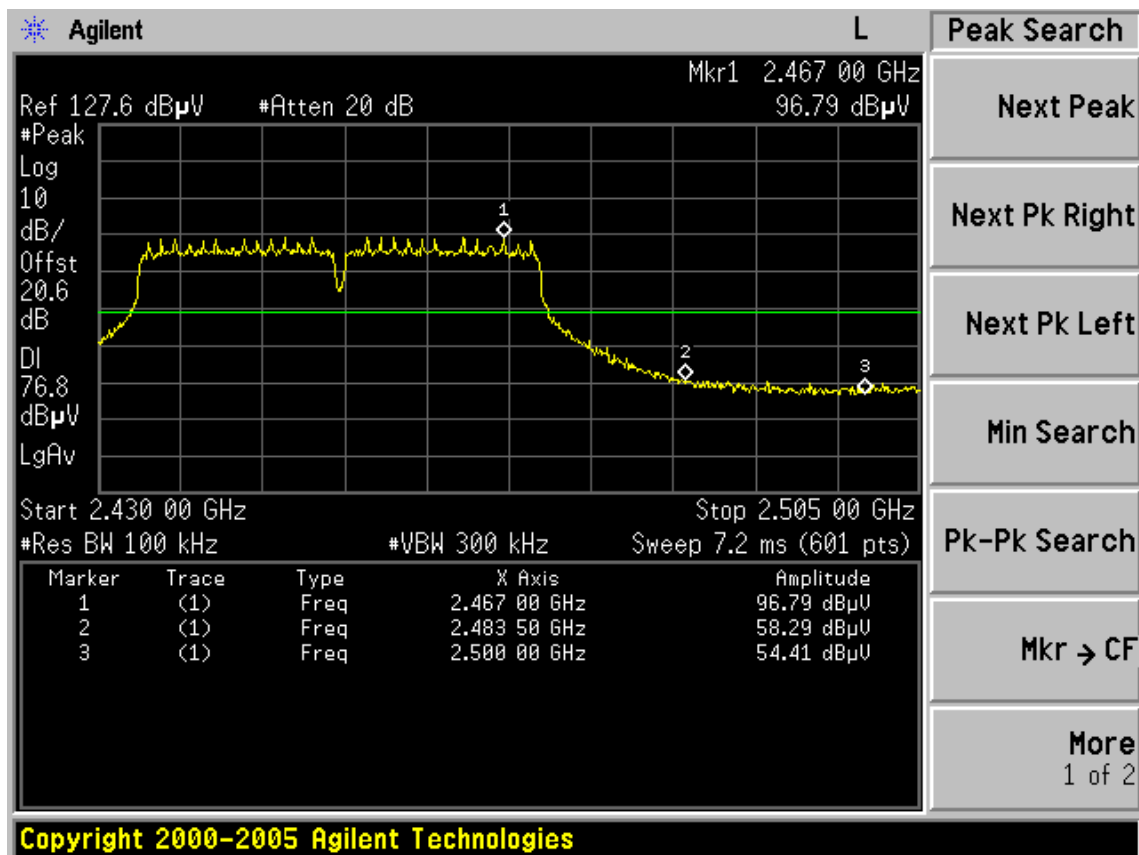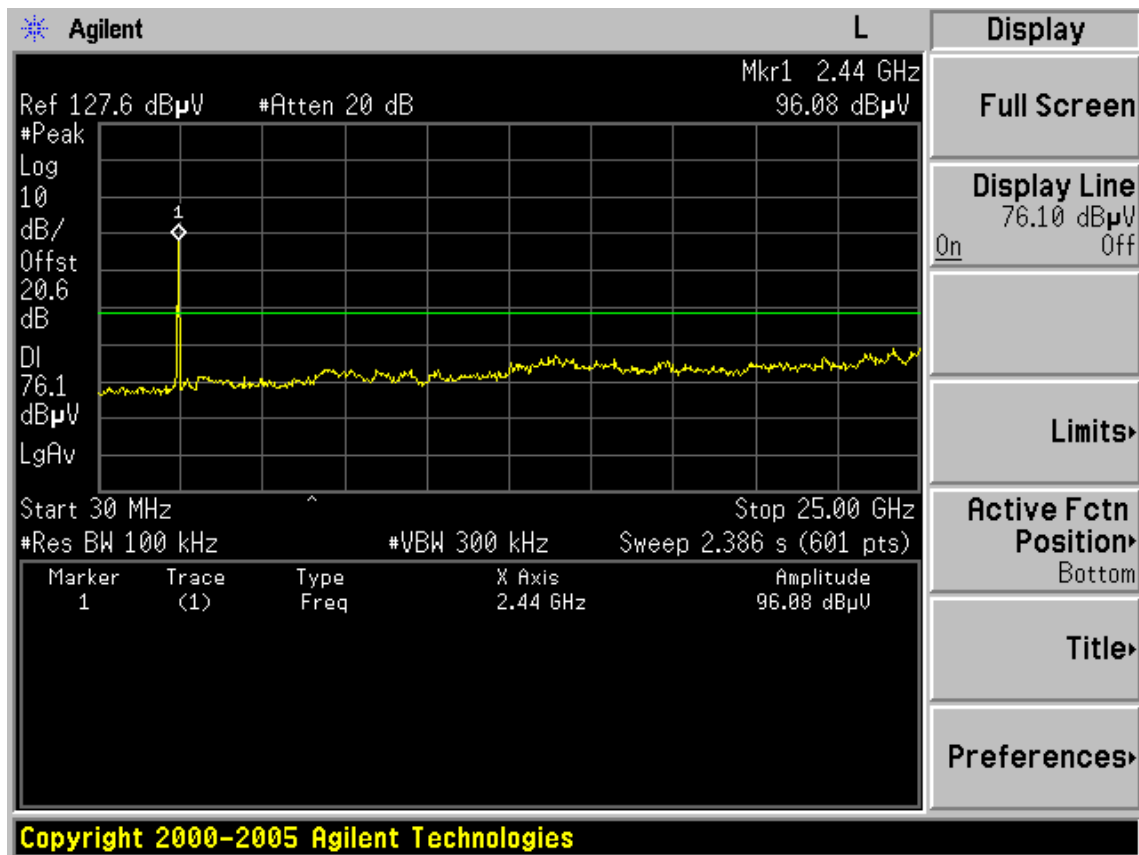

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 10	1 Year
2.	Horn Antenna	EMCO	3115	9607-4877	Nov.25, 09	1.5 Year
3.	Amplifier	Agilent	8449B	3008A02495	May.08, 10	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX 102	28620/2	May.08, 10	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX 102	271471/4	May.08, 10	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX 102	29086/2	May.08, 10	1 Year

6.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

6.4. Test Results

Pass (The testing data was attached in the next pages.)

All the emissions outside operation frequency band were comply with 15.209 limit




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 73

File: E:\2010 report data\T\TP-LINK\ACS1000937.EM6 (104)

Date: 2010-05-30

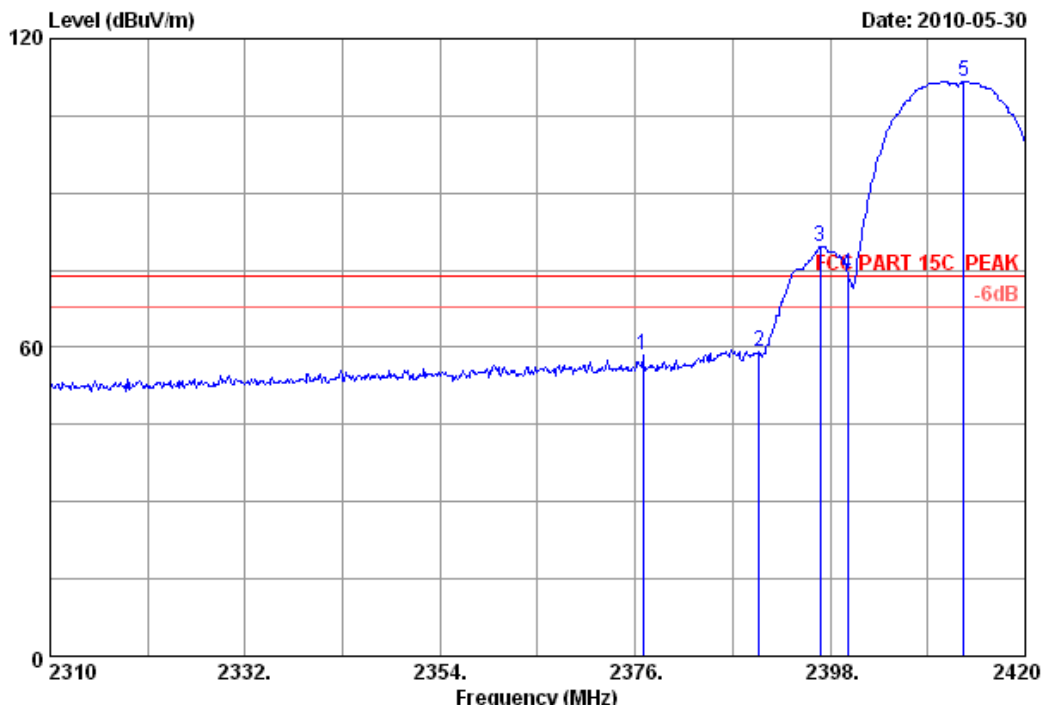

Site no. : 3m Chamber Data no. : 73
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2376.880	29.43	8.67	36.00	56.31	58.41	74.00	15.59	Peak
2	2390.000	29.44	8.67	36.09	57.03	59.05	74.00	14.95	Peak
3	2396.900	29.44	8.72	36.09	77.64	79.71	74.00	-5.71	Peak
4	2400.000	29.44	8.72	36.09	72.25	74.32	74.00	-0.32	Peak
5	2413.070	29.45	8.72	35.95	109.55	111.77	74.00	-37.77	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 74

File: E:\2010 report data\T\TP-LINK\ACS1000937.EM6 (104)

Date: 2010-05-30

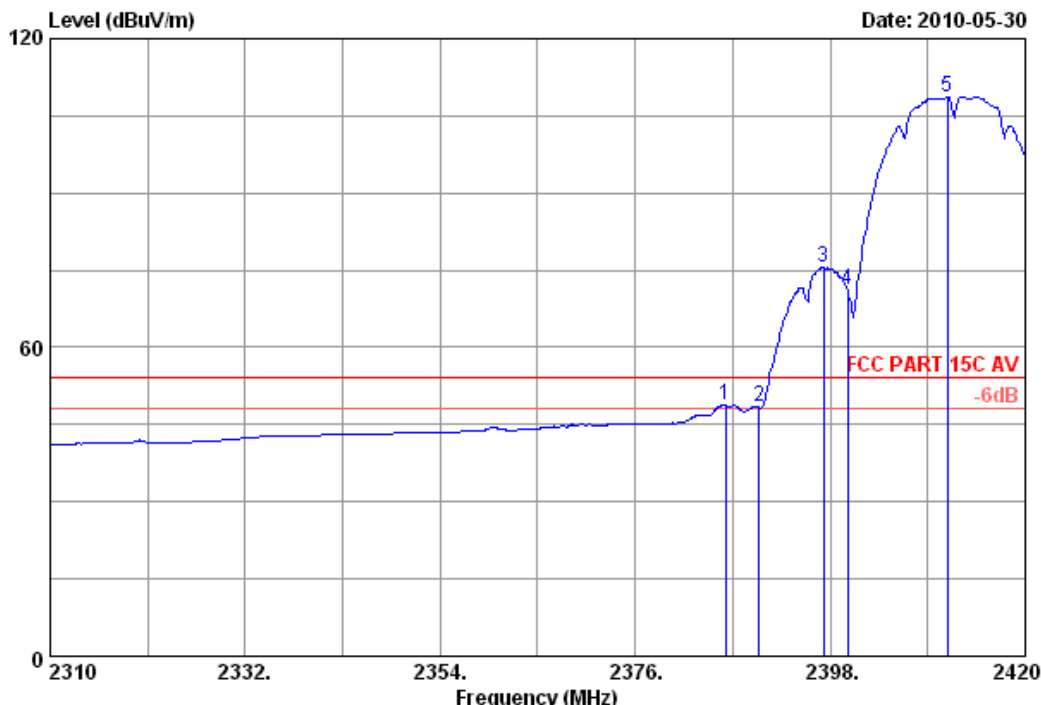

Site no. : 3m Chamber Data no. : 74
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2386.230	29.44	8.67	36.09	46.77	48.79	54.00	5.21	Average
2	2390.000	29.44	8.67	36.09	46.39	48.41	54.00	5.59	Average
3	2397.230	29.44	8.72	36.09	73.44	75.51	54.00	-21.51	Average
4	2400.000	29.44	8.72	36.09	68.97	71.04	54.00	-17.04	Average
5	2411.200	29.45	8.72	35.95	106.54	108.76	54.00	-54.76	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 75

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

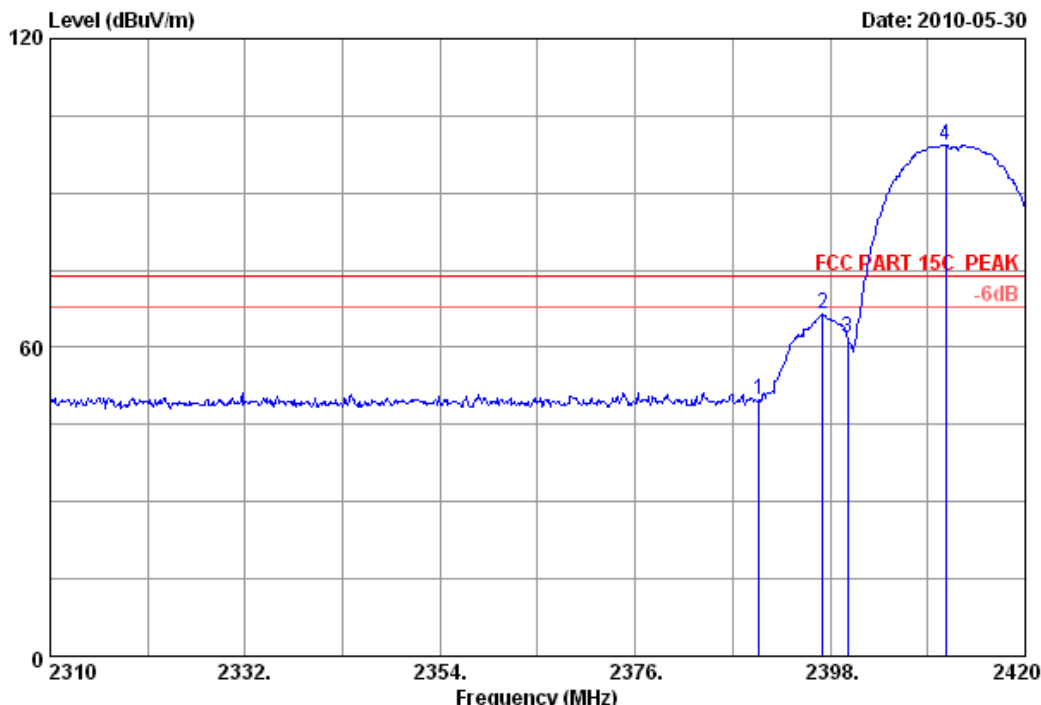

Site no. : 3m Chamber Data no. : 75
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	29.44	8.67	36.09	47.72	49.74	74.00	24.26	Peak
2	2397.120	29.44	8.72	36.09	64.33	66.40	74.00	7.60	Peak
3	2400.000	29.44	8.72	36.09	59.74	61.81	74.00	12.19	Peak
4	2410.980	29.45	8.72	35.95	97.11	99.33	74.00	-25.33	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 76

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

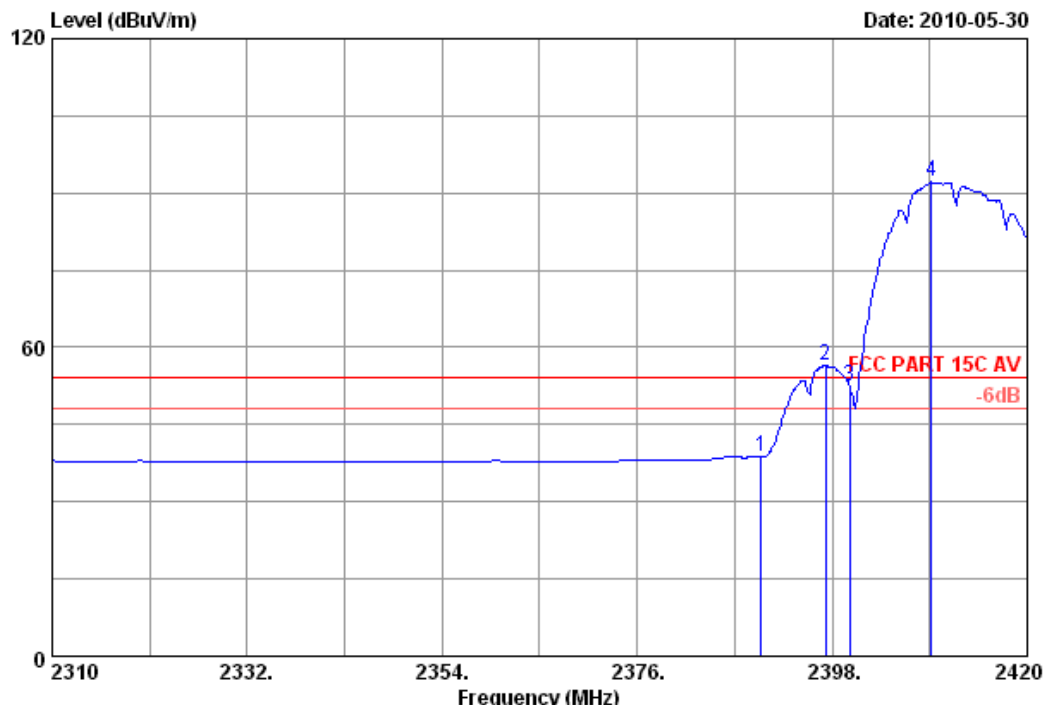

Site no. : 3m Chamber Data no. : 76
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH1 2412MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	8.67	36.09	36.80	38.82	54.00	15.18	Average
2	2397.230	29.44	8.72	36.09	54.40	56.47	54.00	-2.47	Average
3	2400.000	29.44	8.72	36.09	50.37	52.44	54.00	1.56	Average
4	2409.220	29.45	8.72	35.95	89.87	92.09	54.00	-38.09	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 77

File: E:\2010 report data\T\TP-LINK\ACS1000937.EM6 (104)

Date: 2010-05-30

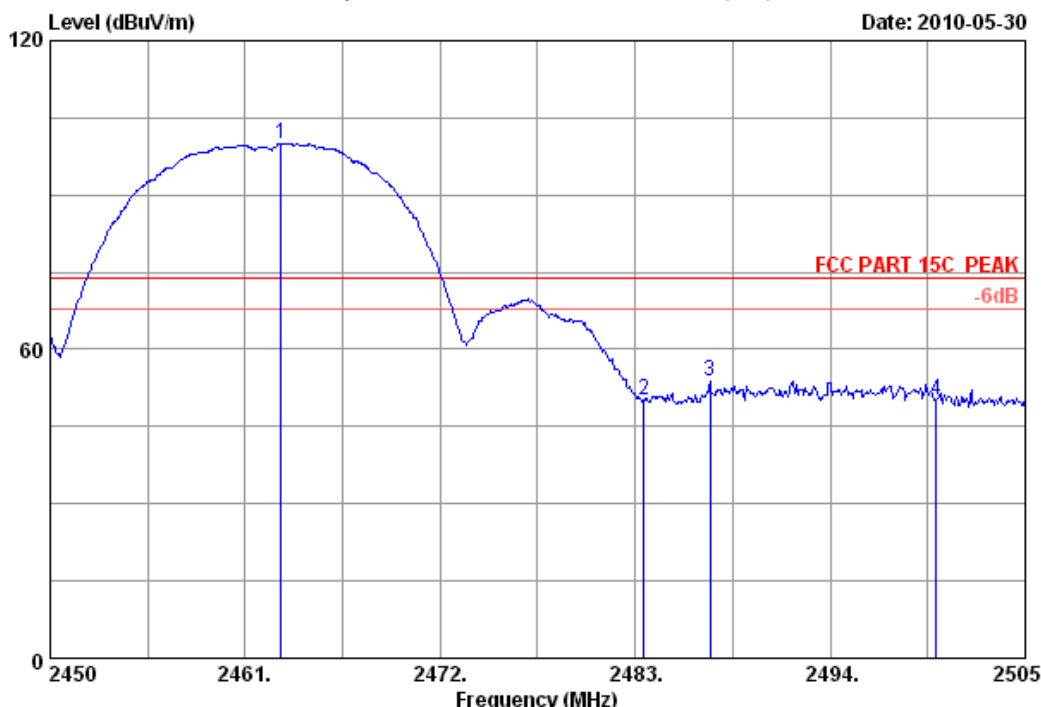

Site no. : 3m Chamber Data no. : 77
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH11 2462MHz Tx
M/N : TL-WR743ND

	Ant.	Cable	Amp.		Emission				
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2463.035	29.48	8.82	36.02	97.68	99.96	74.00	-25.96	Peak	
2 2483.500	29.49	8.87	35.97	47.73	50.12	74.00	23.88	Peak	
3 2487.235	29.49	8.87	35.97	51.49	53.88	74.00	20.12	Peak	
4 2500.000	29.50	8.92	36.00	47.86	50.28	74.00	23.72	Peak	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 78

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

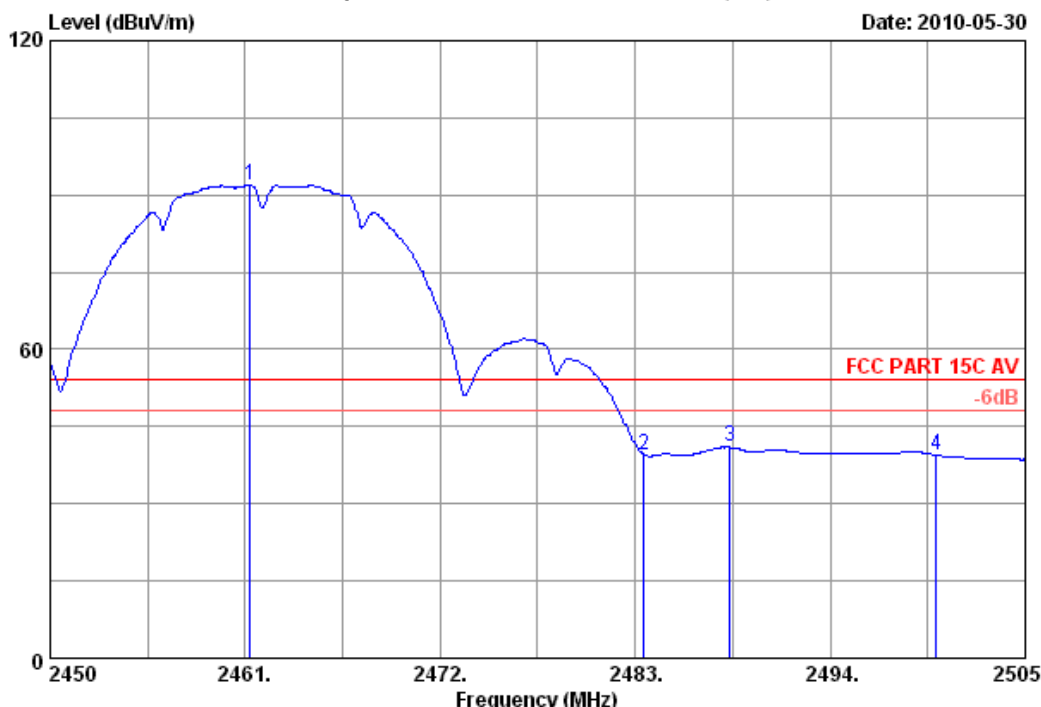

Site no. : 3m Chamber Data no. : 78
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2461.275	29.48	8.82	36.02	89.73	92.01	54.00	-38.01	Average
2	2483.500	29.49	8.87	35.97	37.16	39.55	54.00	14.45	Average
3	2488.335	29.50	8.87	36.00	38.62	40.99	54.00	13.01	Average
4	2500.000	29.50	8.92	36.00	36.98	39.40	54.00	14.60	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 79

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

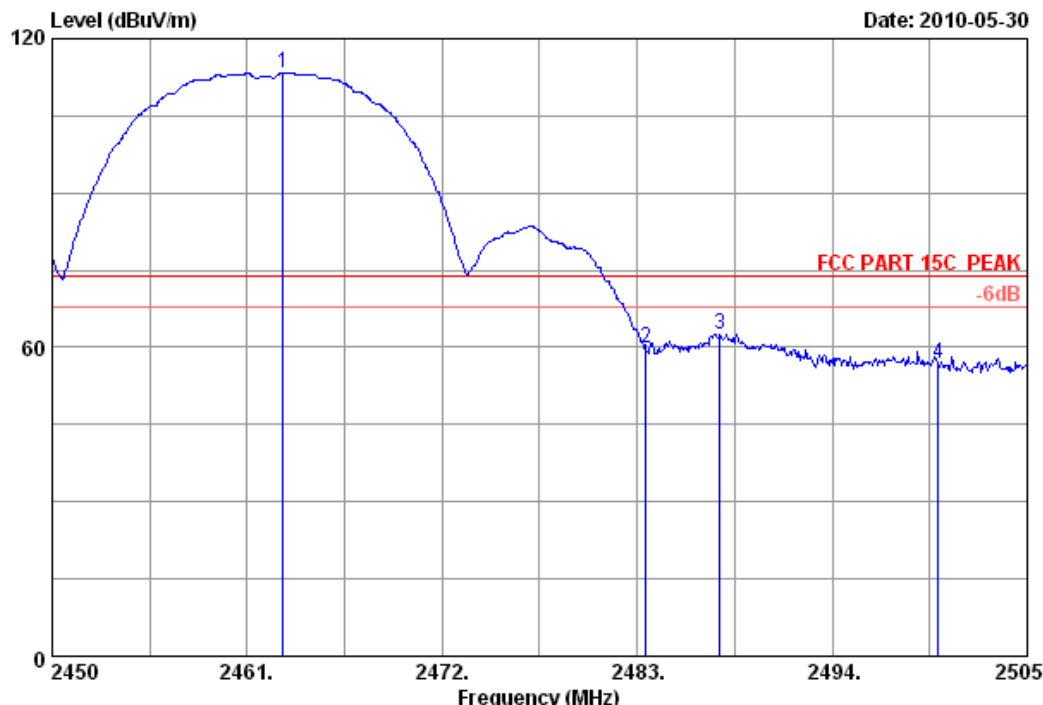

Site no. : 3m Chamber Data no. : 79
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH11 2462MHz Tx
M/N : TL-WR743ND

	Ant.	Cable	Amp.			Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2463.035	29.48	8.82	36.02	111.02	113.30	74.00	-39.30	Peak	
2 2483.500	29.49	8.87	35.97	57.41	59.80	74.00	14.20	Peak	
3 2487.675	29.50	8.87	36.00	60.10	62.47	74.00	11.53	Peak	
4 2500.000	29.50	8.92	36.00	54.28	56.70	74.00	17.30	Peak	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 80

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

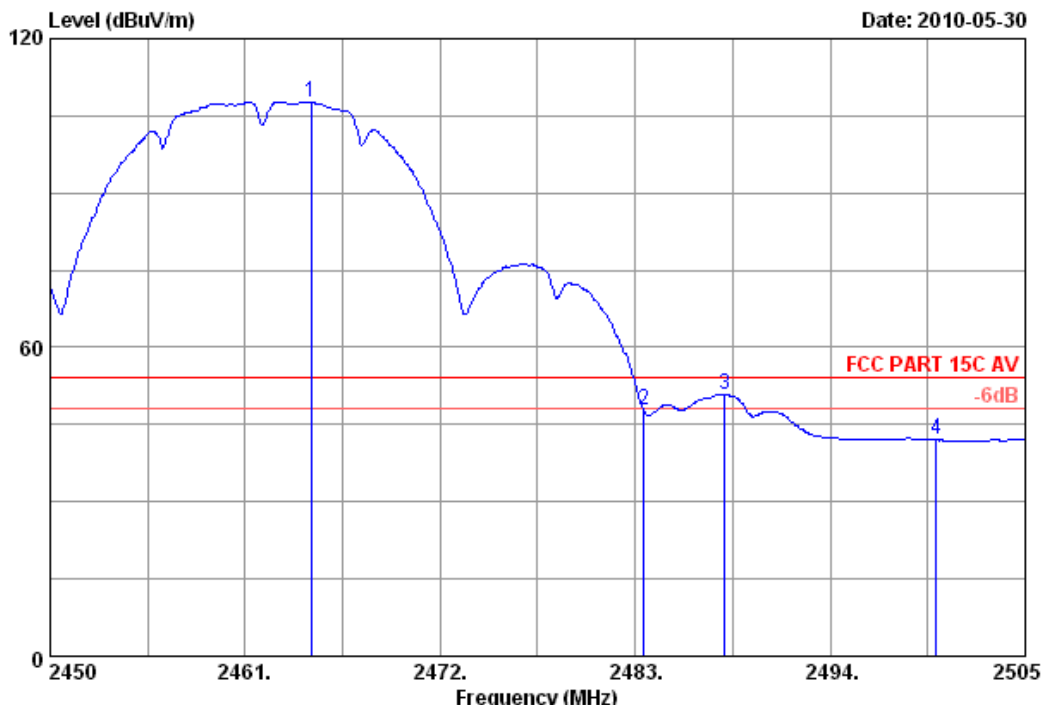

Site no. : 3m Chamber Data no. : 80
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11b CH11 2462MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.740	29.48	8.82	36.02	105.46	107.74	54.00	-53.74	Average
2	2483.500	29.49	8.87	35.97	45.29	47.68	54.00	6.32	Average
3	2488.060	29.50	8.87	36.00	48.57	50.94	54.00	3.06	Average
4	2500.000	29.50	8.92	36.00	39.54	41.96	54.00	12.04	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 81

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

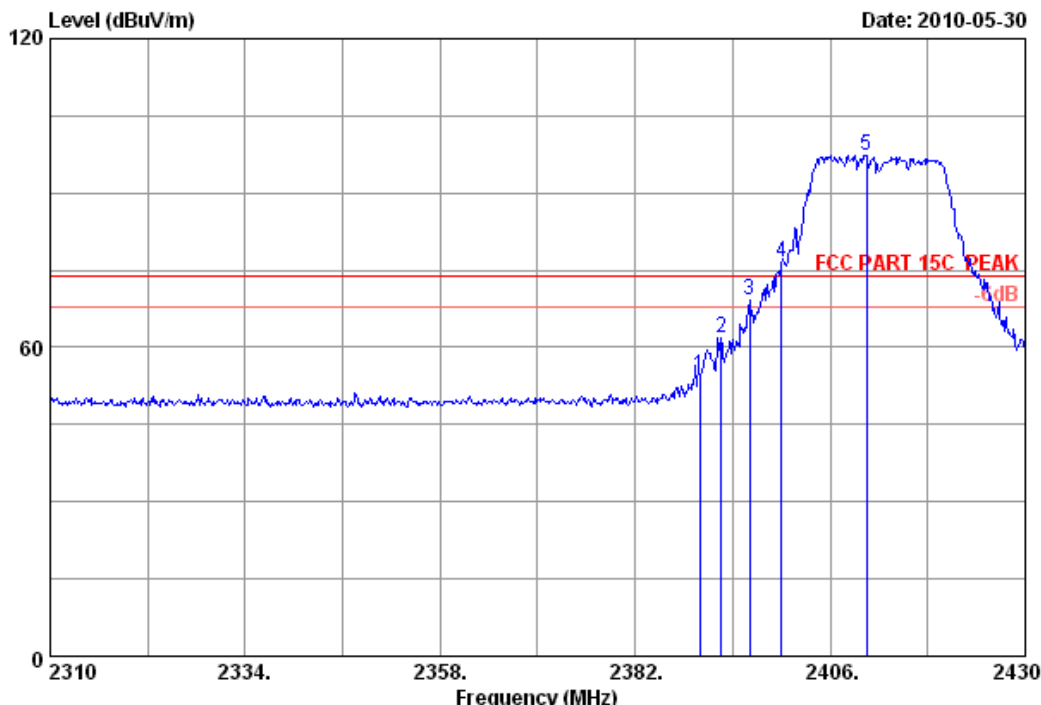

Site no. : 3m Chamber Data no. : 81
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : TL-WR743ND

	Ant.	Cable	Amp.			Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2390.000	29.44	8.67	36.09	52.31	54.33	74.00	19.67	Peak	
2 2392.560	29.44	8.67	36.09	59.91	61.93	74.00	12.07	Peak	
3 2396.040	29.44	8.67	36.09	67.28	69.30	74.00	4.70	Peak	
4 2400.000	29.44	8.72	36.09	74.64	76.71	74.00	-2.71	Peak	
5 2410.440	29.45	8.72	35.95	95.00	97.22	74.00	-23.22	Peak	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 82

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

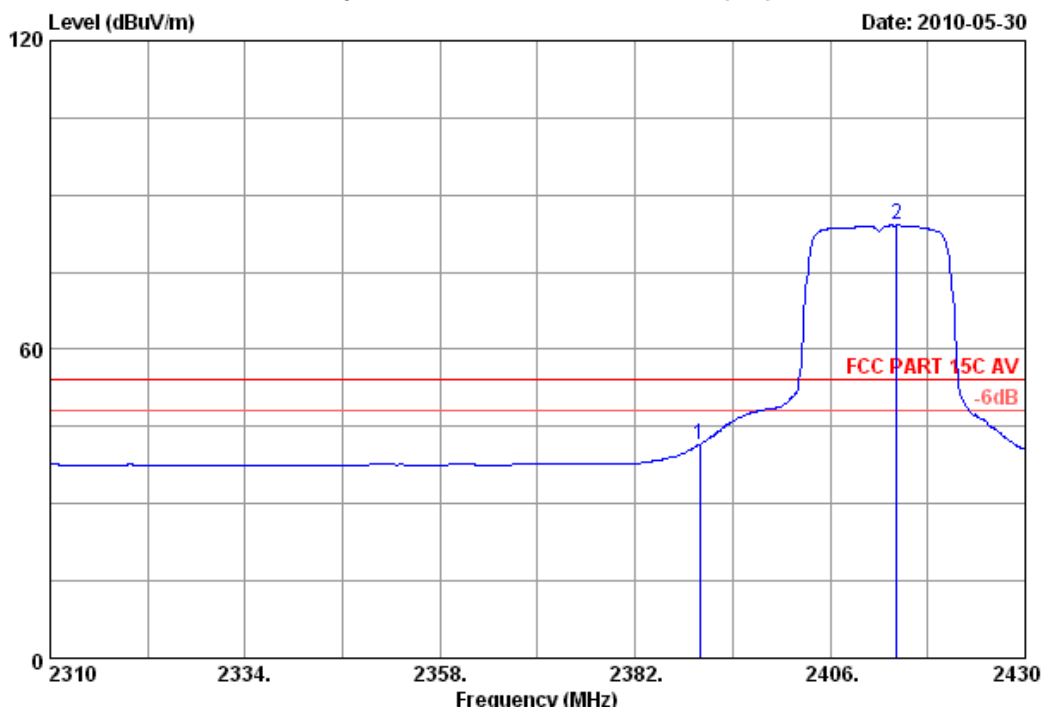

Site no. : 3m Chamber Data no. : 82
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	29.44	8.67	36.09	39.52	41.54	54.00	12.46	Average
2	2414.160	29.45	8.72	35.95	81.91	84.13	54.00	-30.13	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 83

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

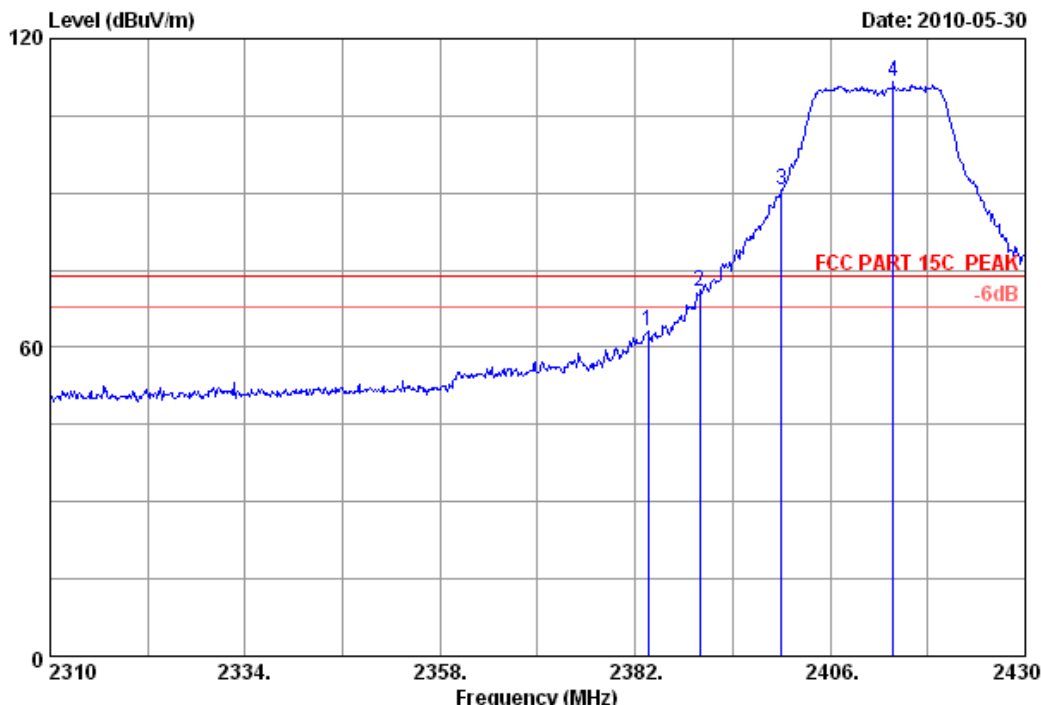

Site no. : 3m Chamber Data no. : 83
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2383.560	29.43	8.67	36.00	61.20	63.30	74.00	10.70	Peak
2	2390.000	29.44	8.67	36.09	68.92	70.94	74.00	3.06	Peak
3	2400.000	29.44	8.72	36.09	88.35	90.42	74.00	-16.42	Peak
4	2413.800	29.45	8.72	35.95	109.55	111.77	74.00	-37.77	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 84

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

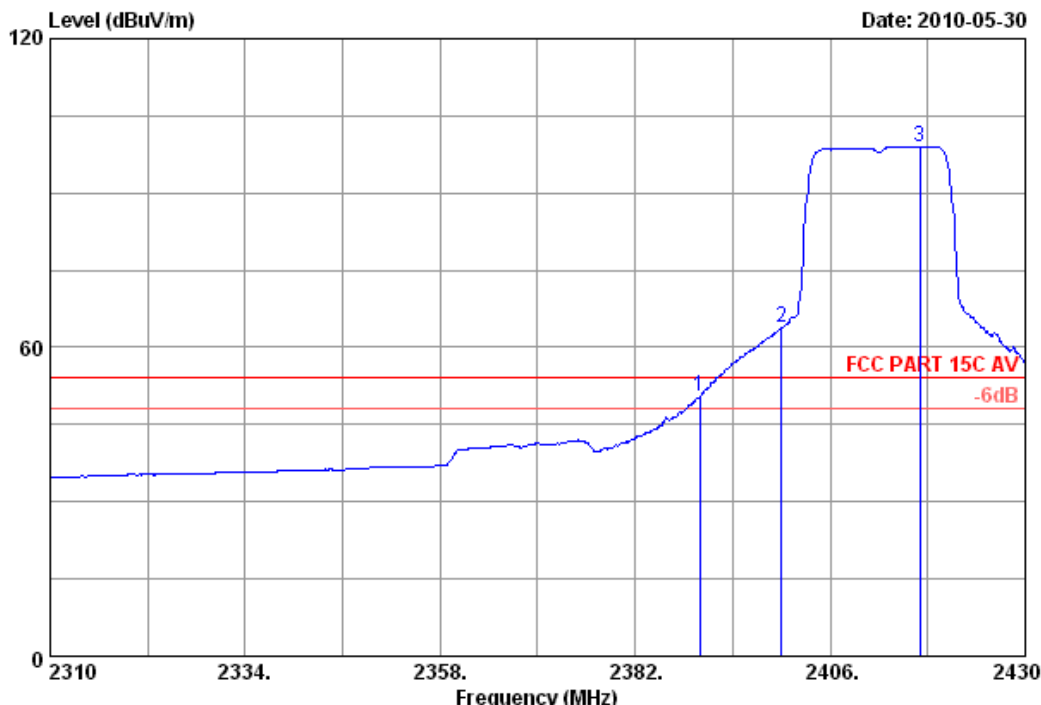

Site no. : 3m Chamber Data no. : 84
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	29.44	8.67	36.09	48.59	50.61	54.00	3.39	Average
2	2400.000	29.44	8.72	36.09	61.69	63.76	54.00	-9.76	Average
3	2417.040	29.45	8.72	35.95	96.85	99.07	54.00	-45.07	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 85

File: E:\2010 report data\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

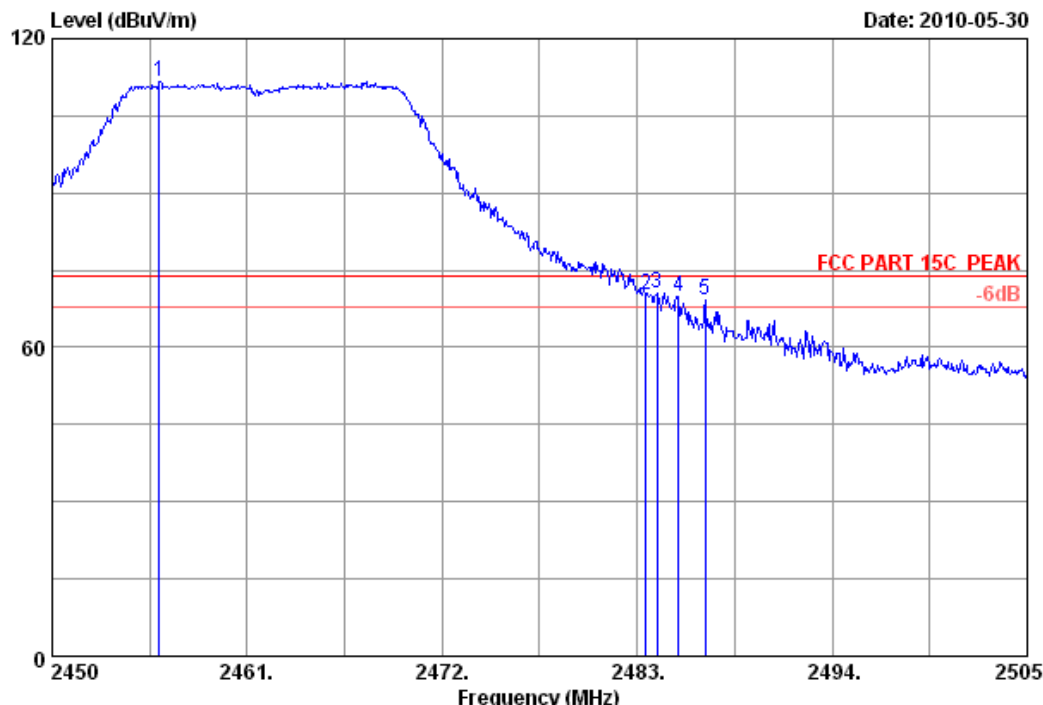

Site no. : 3m Chamber Data no. : 85
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2456.050	29.48	8.82	36.02	109.46	111.74	74.00	-37.74	Peak
2	2483.500	29.49	8.87	35.97	67.84	70.23	74.00	3.77	Peak
3	2484.100	29.49	8.87	35.97	67.99	70.38	74.00	3.62	Peak
4	2485.310	29.49	8.87	35.97	67.55	69.94	74.00	4.06	Peak
5	2486.850	29.49	8.87	35.97	66.64	69.03	74.00	4.97	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 86

File: E:\2010 report data\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

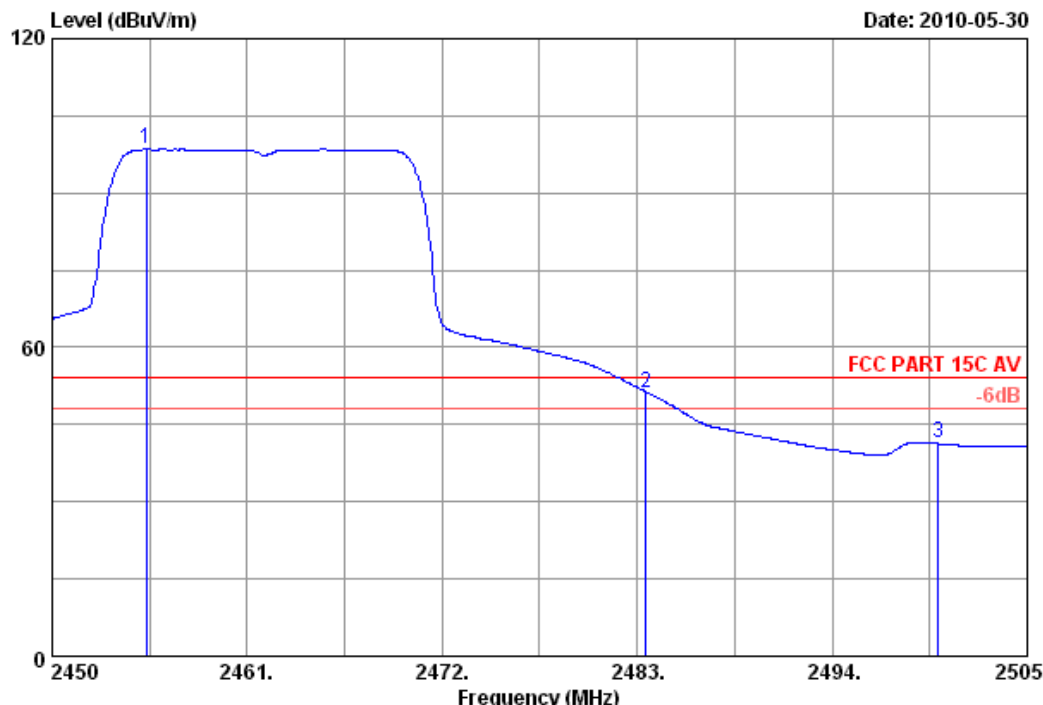

Site no. : 3m Chamber Data no. : 86
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2455.335	29.48	8.82	36.02	96.21	98.49	54.00	-44.49	Average
2	2483.500	29.49	8.87	35.97	48.61	51.00	54.00	3.00	Average
3	2500.000	29.50	8.92	36.00	38.88	41.30	54.00	12.70	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 87

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

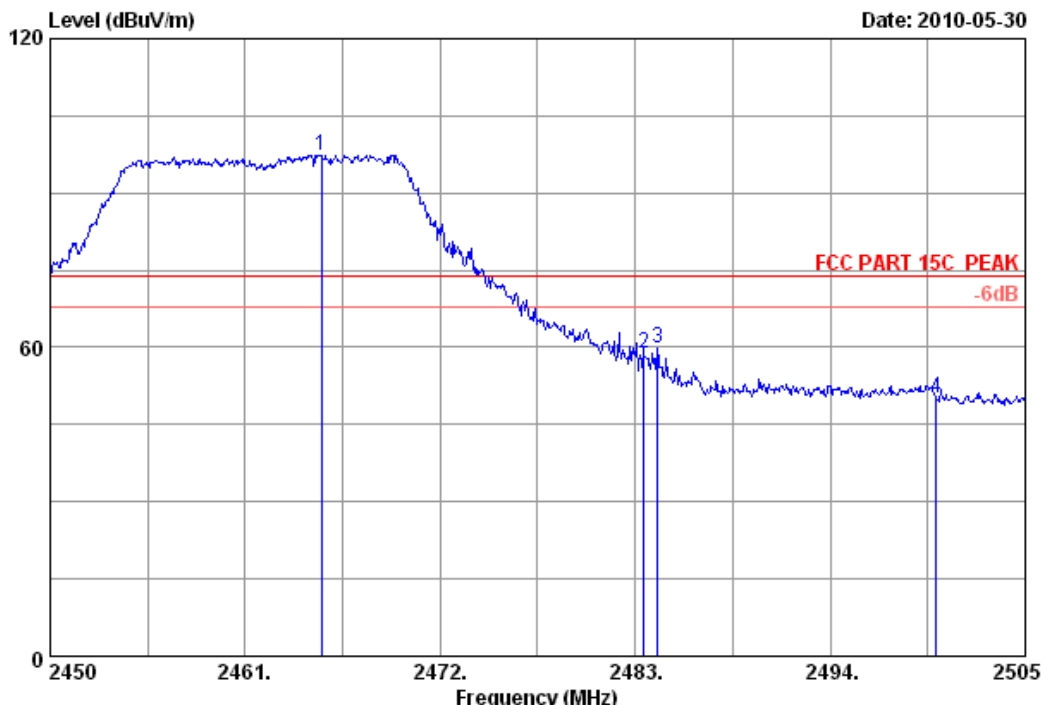

Site no. : 3m Chamber Data no. : 87
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2465.290	29.48	8.82	36.02	95.14	97.42	74.00	-23.42	Peak
2	2483.500	29.49	8.87	35.97	56.60	58.99	74.00	15.01	Peak
3	2484.265	29.49	8.87	35.97	57.34	59.73	74.00	14.27	Peak
4	2500.000	29.50	8.92	36.00	47.74	50.16	74.00	23.84	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 88

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

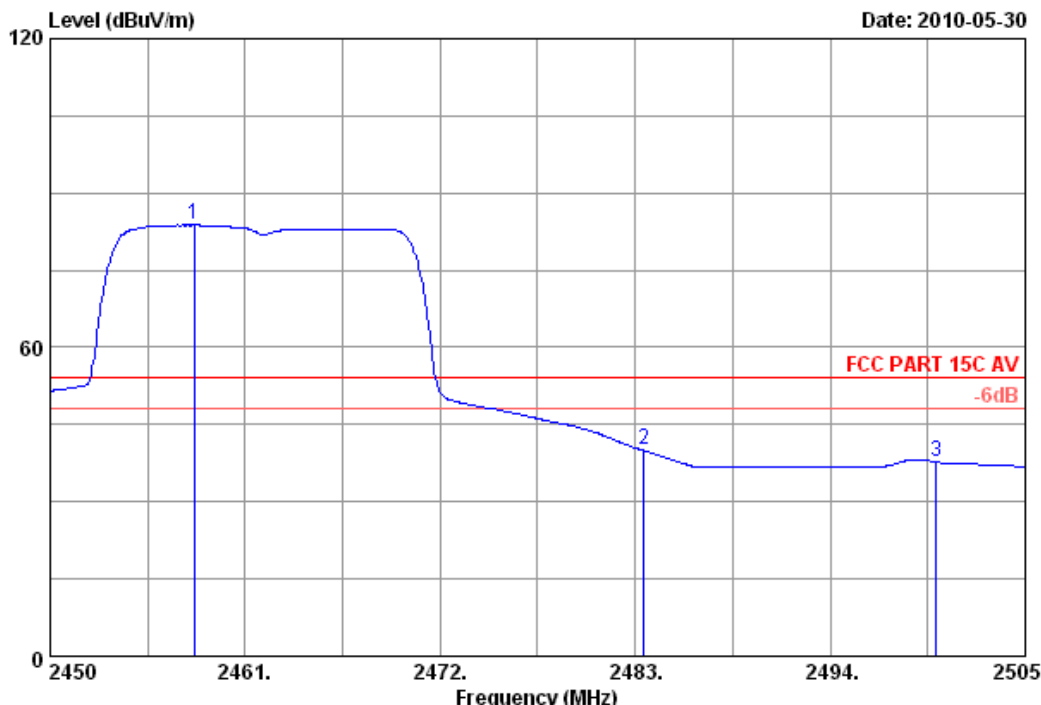

Site no. : 3m Chamber Data no. : 88
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11g CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2458.140	29.48	8.82	36.02	81.49	83.77	54.00	-29.77	Average
2	2483.500	29.49	8.87	35.97	37.57	39.96	54.00	14.04	Average
3	2500.000	29.50	8.92	36.00	35.34	37.76	54.00	16.24	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 89

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

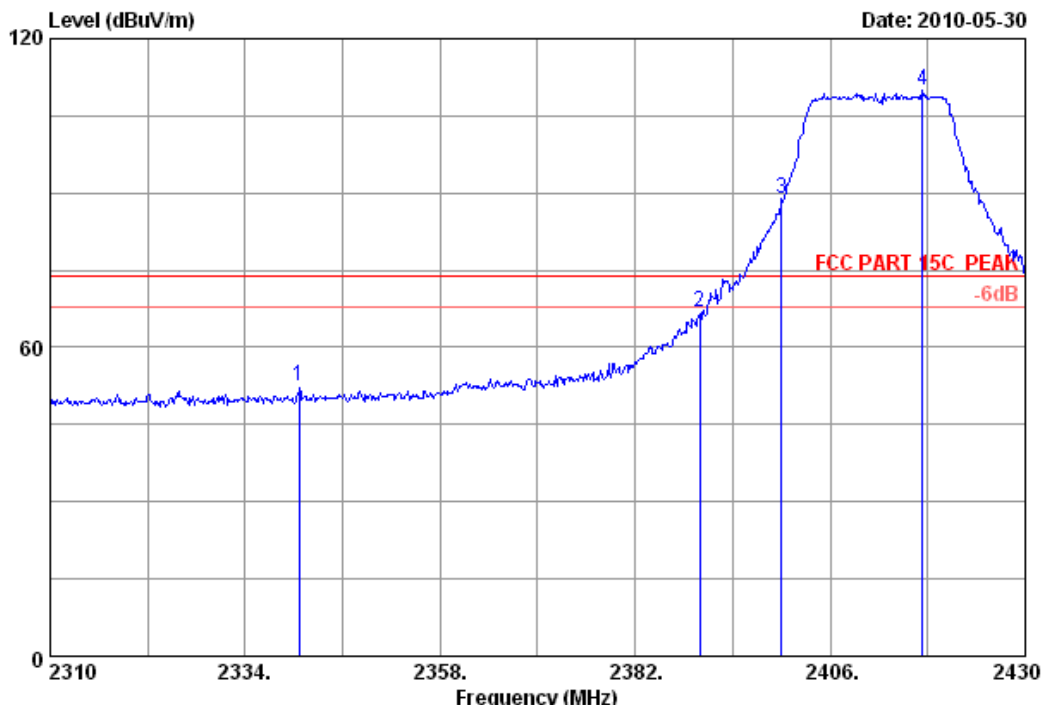

Site no. : 3m Chamber Data no. : 89
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2340.600	29.41	8.57	35.99	50.50	52.49	74.00	21.51	Peak
2	2390.000	29.44	8.67	36.09	64.71	66.73	74.00	7.27	Peak
3	2400.000	29.44	8.72	36.09	86.89	88.96	74.00	-14.96	Peak
4	2417.400	29.45	8.72	35.95	107.73	109.95	74.00	-35.95	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 90

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

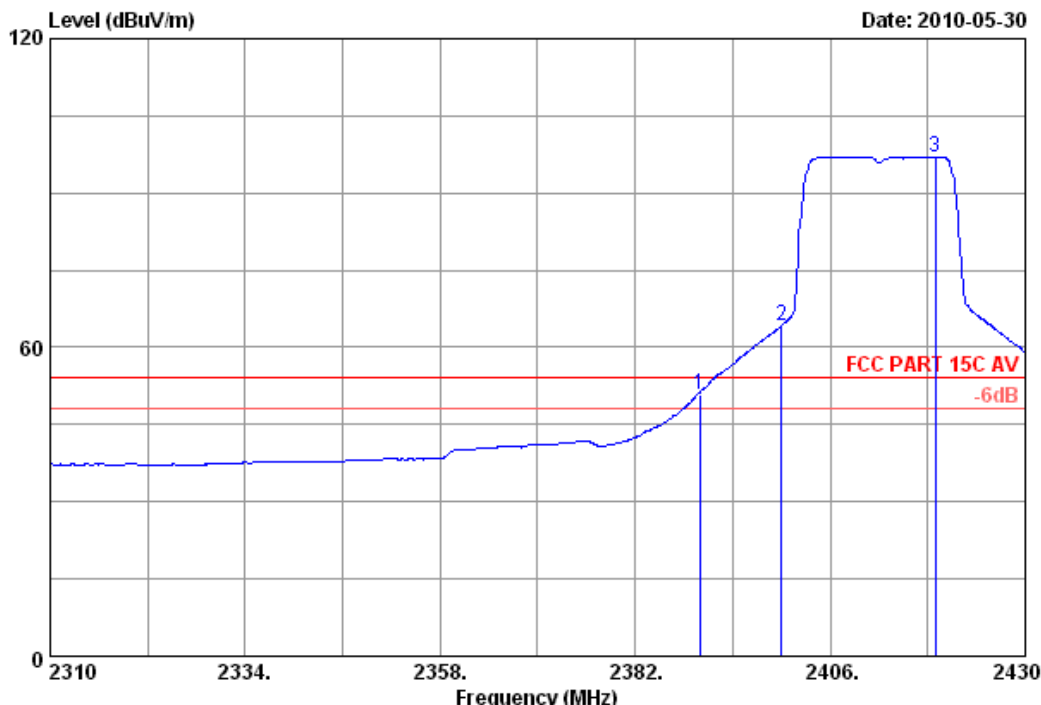

Site no. : 3m Chamber Data no. : 90
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	29.44	8.67	36.09	48.95	50.97	54.00	3.03	Average
2	2400.000	29.44	8.72	36.09	62.24	64.31	54.00	-10.31	Average
3	2418.960	29.45	8.72	35.95	94.83	97.05	54.00	-43.05	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 91

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

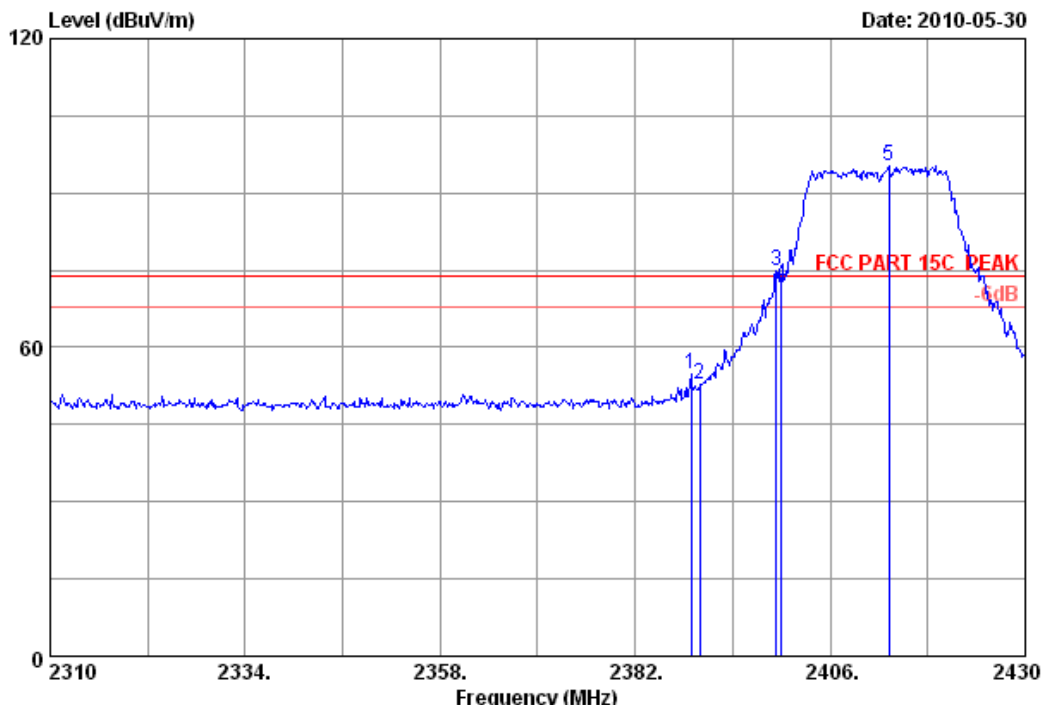

Site no. : 3m Chamber Data no. : 91
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : TL-WR743ND

	Ant.	Cable	Amp.			Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2388.840	29.44	8.67	36.09	52.71	54.73	74.00	19.27	Peak	
2 2390.000	29.44	8.67	36.09	50.79	52.81	74.00	21.19	Peak	
3 2399.400	29.44	8.72	36.09	72.67	74.74	74.00	-0.74	Peak	
4 2400.000	29.44	8.72	36.09	70.03	72.10	74.00	1.90	Peak	
5 2413.200	29.45	8.72	35.95	92.92	95.14	74.00	-21.14	Peak	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 92

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

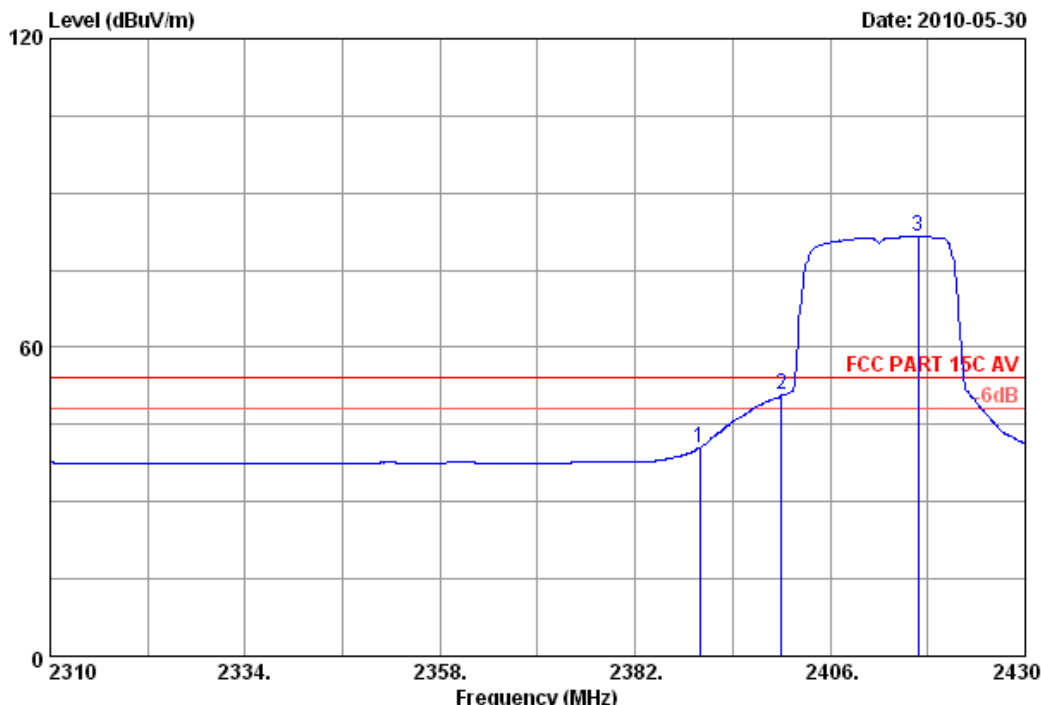

Site no. : 3m Chamber Data no. : 92
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	29.44	8.67	36.09	38.57	40.59	54.00	13.41	Average
2	2400.000	29.44	8.72	36.09	48.58	50.65	54.00	3.35	Average
3	2416.800	29.45	8.72	35.95	79.30	81.52	54.00	-27.52	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 93

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

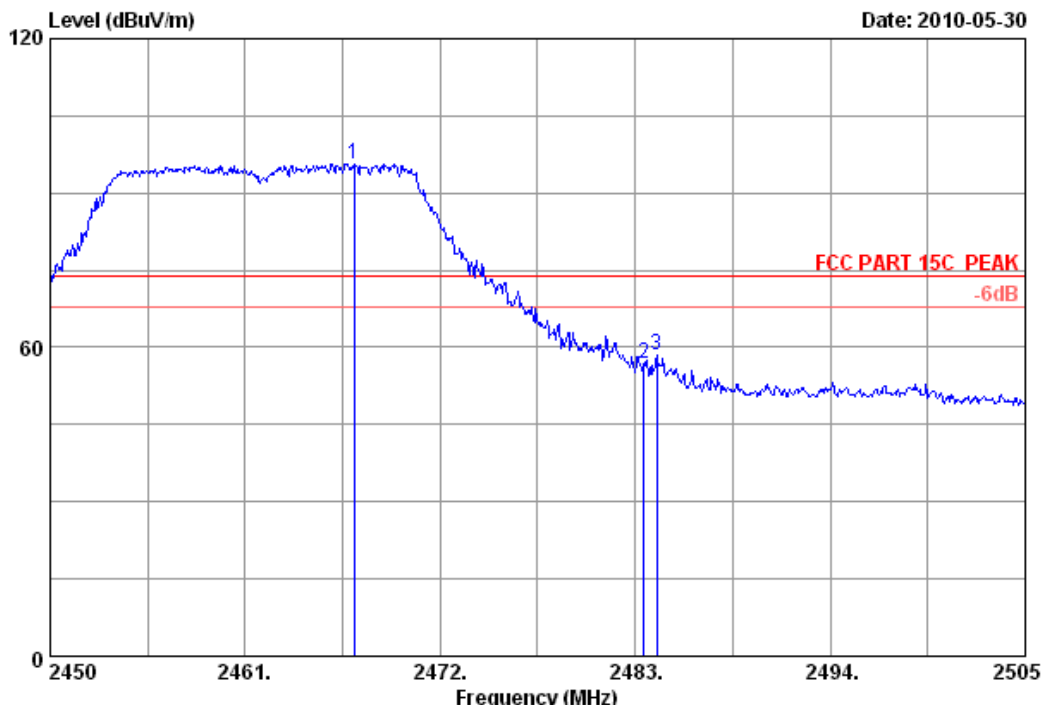

Site no. : 3m Chamber Data no. : 93
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2467.160	29.48	8.82	36.02	93.37	95.65	74.00	-21.65	Peak
2	2483.500	29.49	8.87	35.97	54.40	56.79	74.00	17.21	Peak
3	2484.210	29.49	8.87	35.97	56.16	58.55	74.00	15.45	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 94

File: E:\2010 report data\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

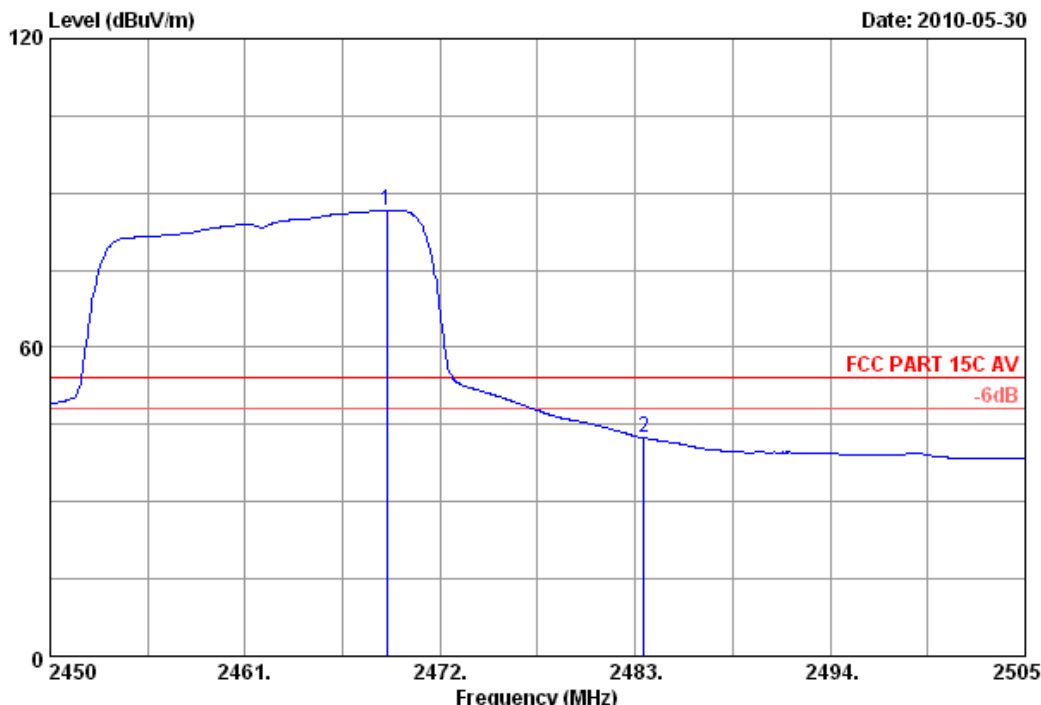

Site no. : 3m Chamber Data no. : 94
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2468.975	29.48	8.82	36.02	84.25	86.53	54.00	-32.53	Average
2	2483.500	29.49	8.87	35.97	39.99	42.38	54.00	11.62	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 95

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

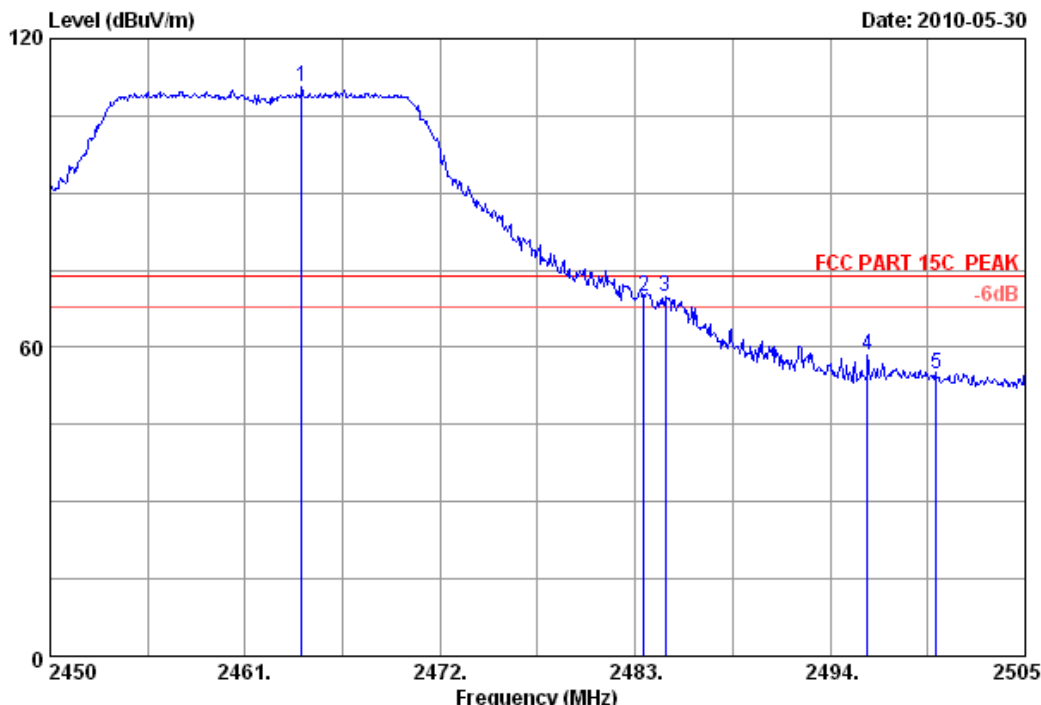

Site no. : 3m Chamber Data no. : 95
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2464.190	29.48	8.82	36.02	108.25	110.53	74.00	-36.53	Peak
2	2483.500	29.49	8.87	35.97	67.60	69.99	74.00	4.01	Peak
3	2484.705	29.49	8.87	35.97	67.40	69.79	74.00	4.21	Peak
4	2496.090	29.50	8.87	36.00	56.05	58.42	74.00	15.58	Peak
5	2500.000	29.50	8.92	36.00	52.23	54.65	74.00	19.35	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 96

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

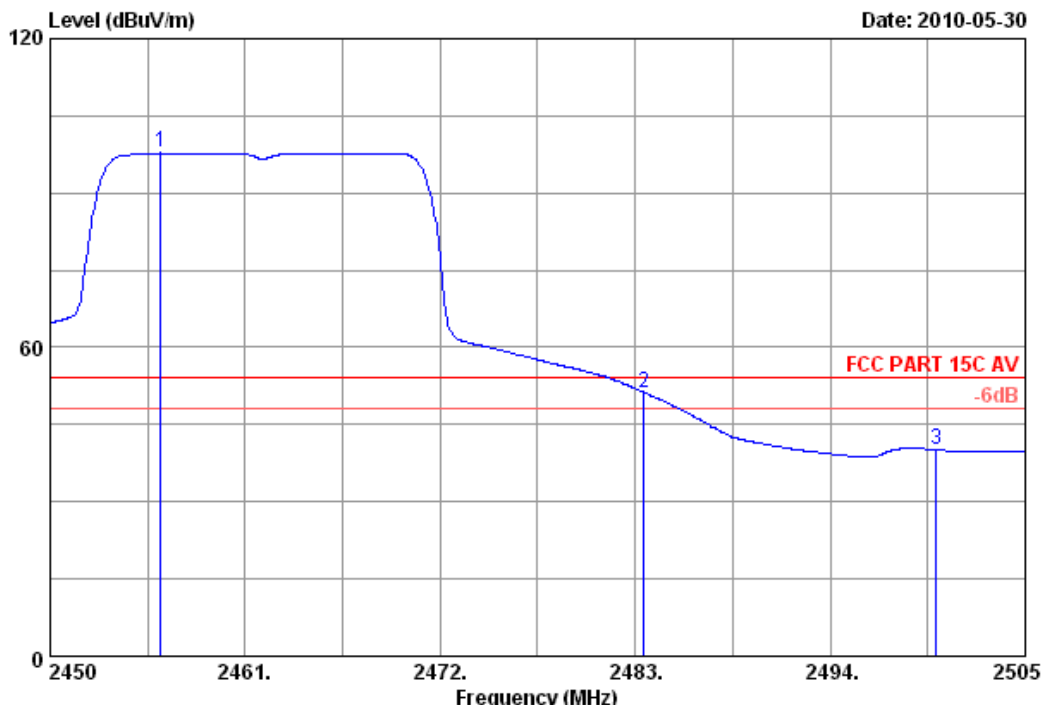

Site no. : 3m Chamber Data no. : 96
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2456.215	29.48	8.82	36.02	95.49	97.77	54.00	-43.77	Average
2	2483.500	29.49	8.87	35.97	48.61	51.00	54.00	3.00	Average
3	2500.000	29.50	8.92	36.00	37.65	40.07	54.00	13.93	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 97

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

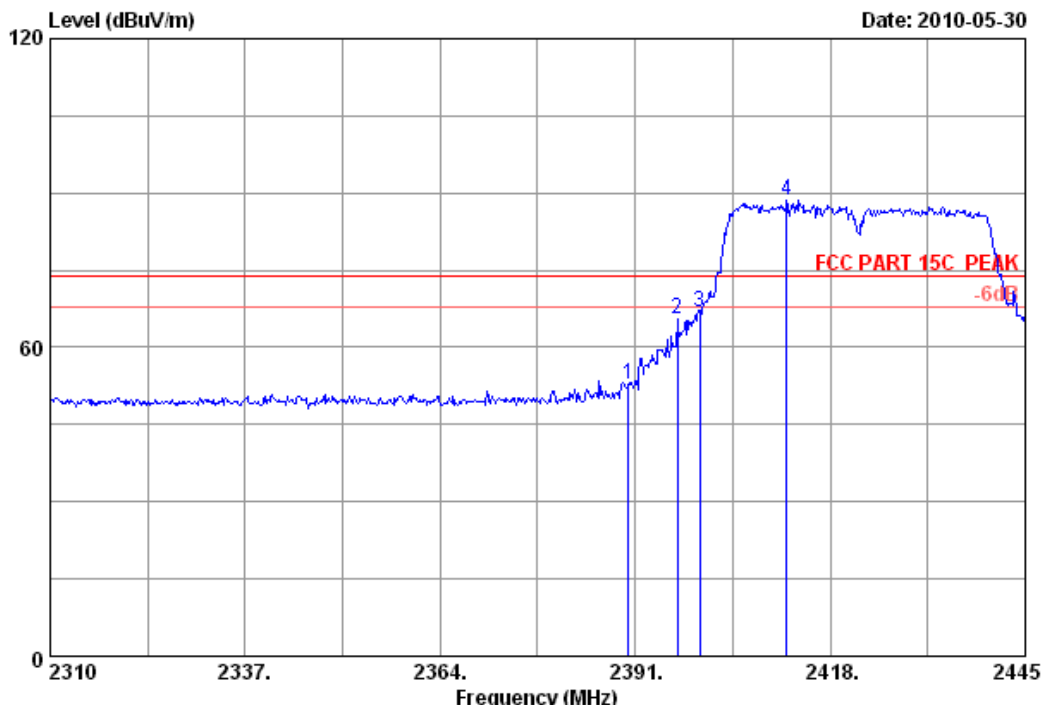

Site no. : 3m Chamber Data no. : 97
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	29.44	8.67	36.09	50.81	52.83	74.00	21.17	Peak
2	2396.805	29.44	8.72	36.09	63.36	65.43	74.00	8.57	Peak
3	2400.000	29.44	8.72	36.09	64.83	66.90	74.00	7.10	Peak
4	2411.925	29.45	8.72	35.95	86.43	88.65	74.00	-14.65	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 98

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

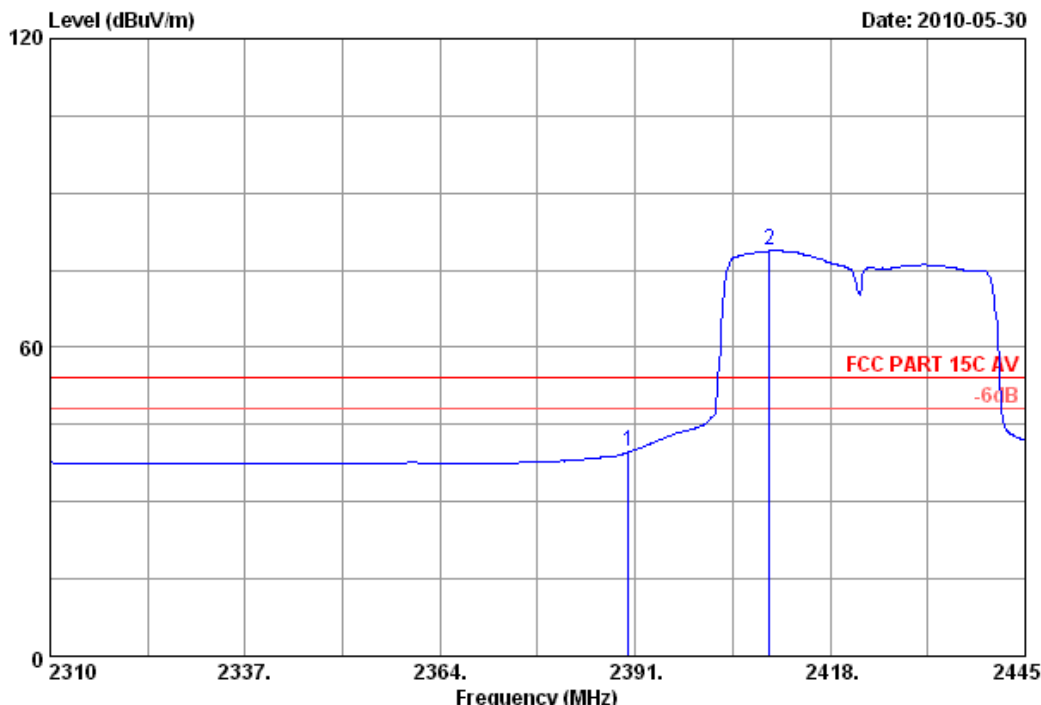

Site no. : 3m Chamber Data no. : 98
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	29.44	8.67	36.09	37.60	39.62	54.00	14.38	Average
2	2409.630	29.45	8.72	35.95	76.61	78.83	54.00	-24.83	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 99

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

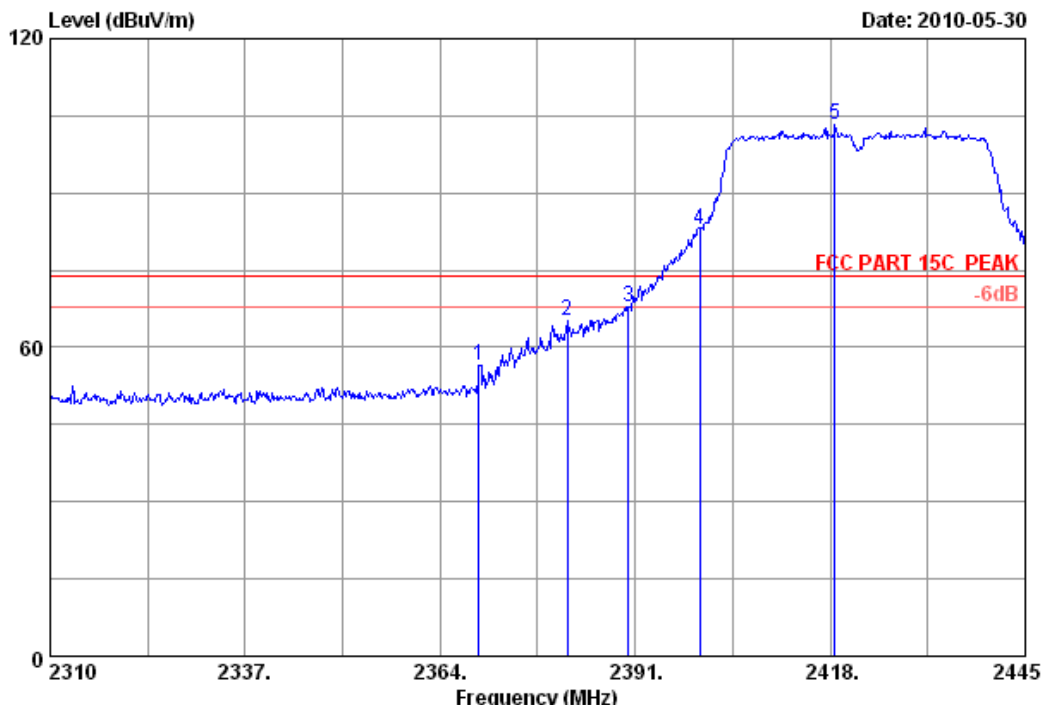

Site no. : 3m Chamber Data no. : 99
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : TL-WR743ND

	Ant.	Cable	Amp.		Emission				
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2369.400	29.43	8.62	36.00	54.42	56.47	74.00	17.53	Peak	
2 2381.550	29.43	8.67	36.00	63.09	65.19	74.00	8.81	Peak	
3 2390.000	29.44	8.67	36.09	65.74	67.76	74.00	6.24	Peak	
4 2400.000	29.44	8.72	36.09	80.90	82.97	74.00	-8.97	Peak	
5 2418.675	29.45	8.72	35.95	101.07	103.29	74.00	-29.29	Peak	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 100

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

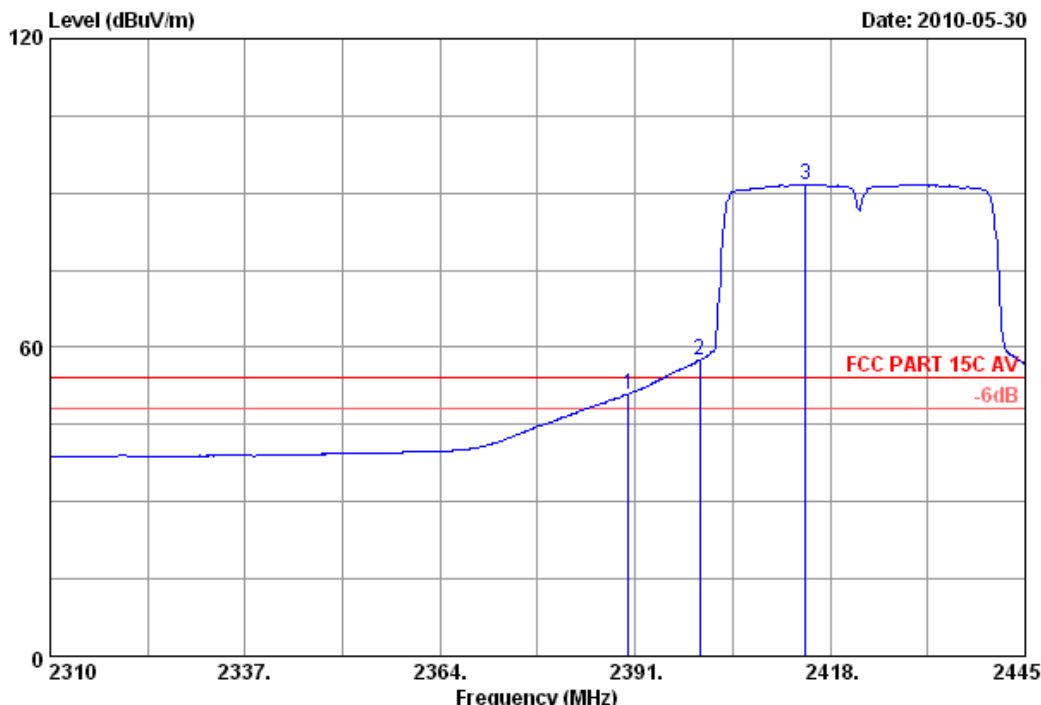

Site no. : 3m Chamber Data no. : 100
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	29.44	8.67	36.09	48.95	50.97	54.00	3.03	Average
2	2400.000	29.44	8.72	36.09	55.50	57.57	54.00	-3.57	Average
3	2414.625	29.45	8.72	35.95	89.51	91.73	54.00	-37.73	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 101

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

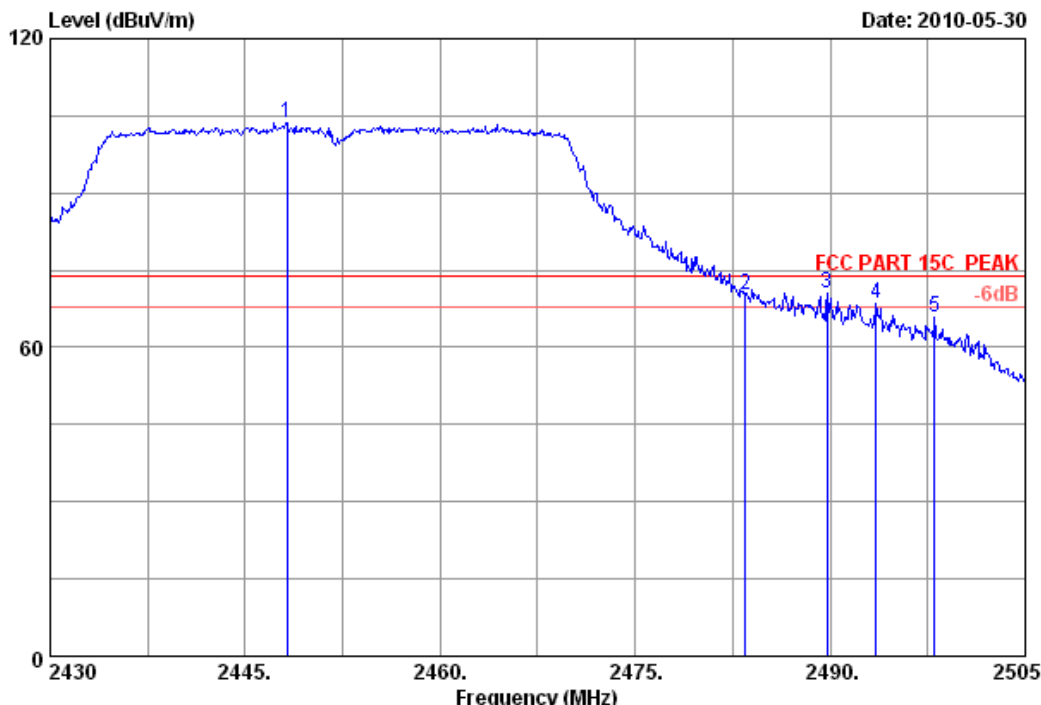

Site no. : 3m Chamber Data no. : 101
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : TL-WR743ND

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2448.225	29.47	8.82	36.06	101.43	103.66	74.00	-29.66	Peak
2	2483.500	29.49	8.87	35.97	67.96	70.35	74.00	3.65	Peak
3	2489.775	29.50	8.87	36.00	68.21	70.58	74.00	3.42	Peak
4	2493.525	29.50	8.87	36.00	66.04	68.41	74.00	5.59	Peak
5	2498.025	29.50	8.92	36.00	63.53	65.95	74.00	8.05	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 102

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

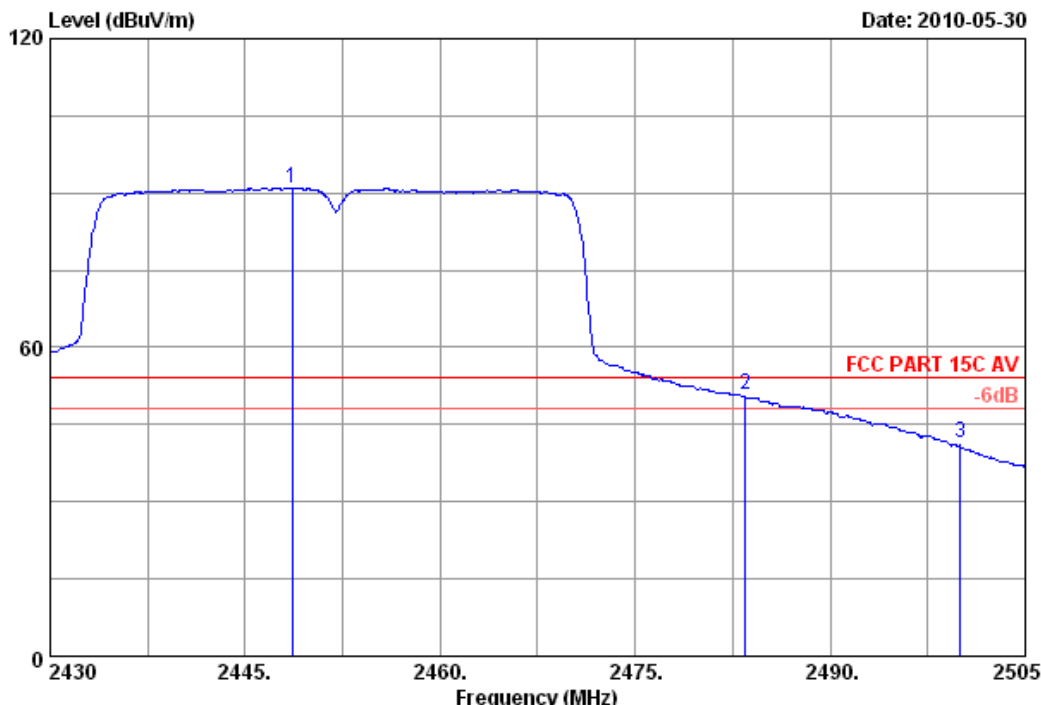

Site no. : 3m Chamber Data no. : 102
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : TL-WR743ND

	Ant.	Cable	Amp.			Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2448.600	29.47	8.82	36.06	88.75	90.98	54.00	-36.98	Average	
2 2483.500	29.49	8.87	35.97	48.51	50.90	54.00	3.10	Average	
3 2500.000	29.50	8.92	36.00	39.01	41.43	54.00	12.57	Average	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 103

File: E:\2010 report data\T\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

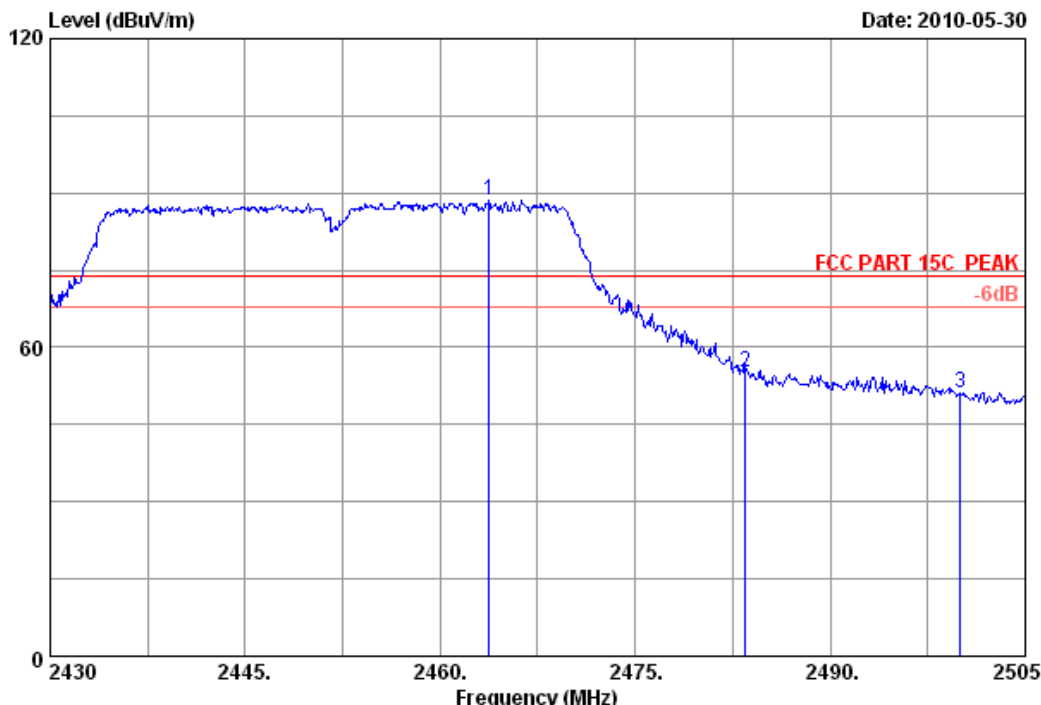

Site no. : 3m Chamber Data no. : 103
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.750	29.48	8.82	36.02	86.21	88.49	74.00	-14.49	Peak
2	2483.500	29.49	8.87	35.97	52.65	55.04	74.00	18.96	Peak
3	2500.000	29.50	8.92	36.00	48.59	51.01	74.00	22.99	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 104

File: E:\2010 report data\TP-LINK\ACS10Q0937.EM6 (104)

Date: 2010-05-30

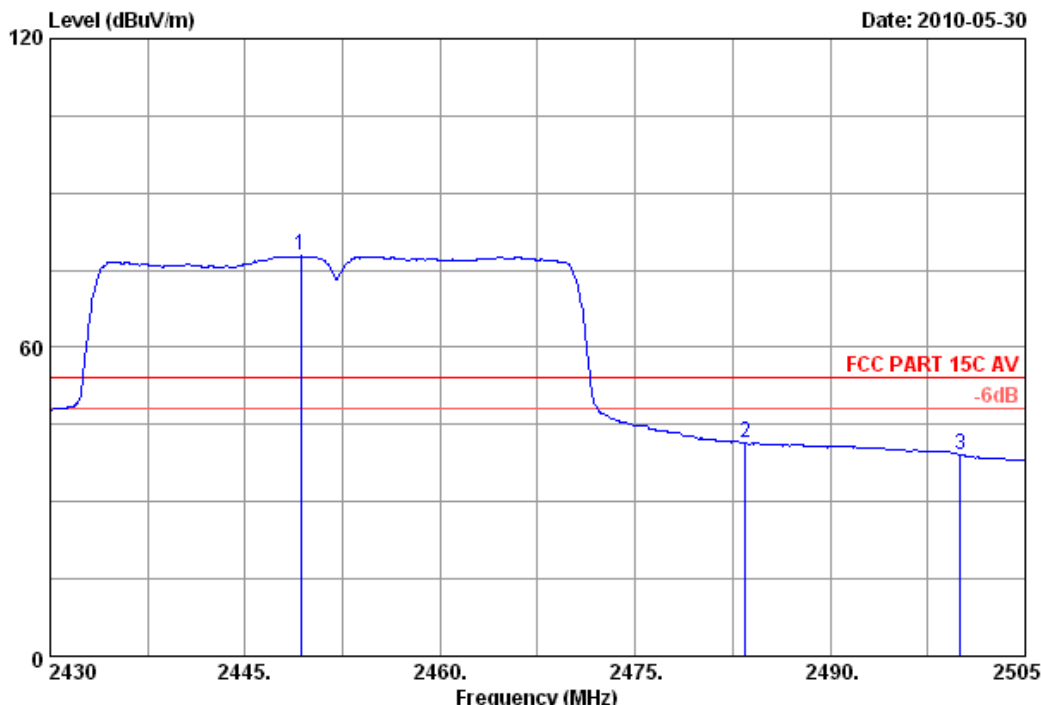

Site no. : 3m Chamber Data no. : 104
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny-lu
EUT : 150Mbps Wireless AP/Client Router
Power : DC 9V From Adapter Input AC 120V/60Hz
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx
M/N : TL-WR743ND

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2449.275	29.47	8.82	36.06	75.49	77.72	54.00	-23.72	Peak
2	2483.500	29.49	8.87	35.97	38.98	41.37	54.00	12.63	Peak
3	2500.000	29.50	8.92	36.00	36.67	39.09	54.00	14.91	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

7. 6dB Bandwidth Test

7.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 10	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08, 10	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX 102	28618/2	May.08, 10	1Year

7.2.Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.3.Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300 kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


7.4.Test Results

EUT: 150Mbps Wireless AP/Client Router		
M/N: TL-WR743ND		
Test date:2010-06-02	Pressure: 100.6kpa	Humidity: 56 %
Tested by: Sunny-Lu	Test site: RF site	Temperature : 25℃


Cable loss: 0.6 dB		Attenuator loss: 20dB	Antenna Gain: 5 dBi
Test Mode	CH	6dB bandwidth (MHz)	Limit (KHz)
11b	CH1	12.132	>500
	CH6	12.087	>500
	CH11	12.143	>500
11g	CH1	16.533	>500
	CH6	16.479	>500
	CH11	16.450	>500
11n HT20	CH1	17.819	>500
	CH6	17.779	>500
	CH11	17.781	>500
11n HT40	CH1	36.153	>500
	CH4	36.133	>500
	CH7	36.349	>500
Conclusion : PASS			

Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

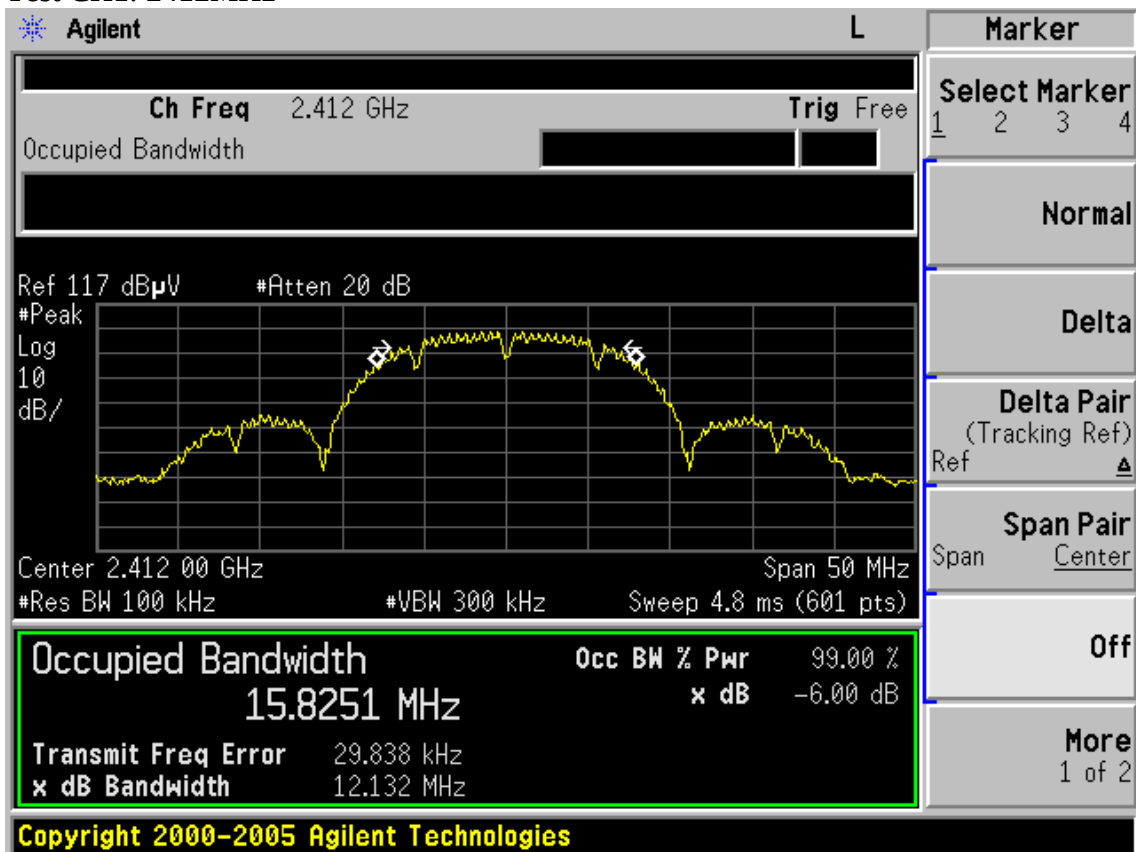

Test CH6: 2437MHz

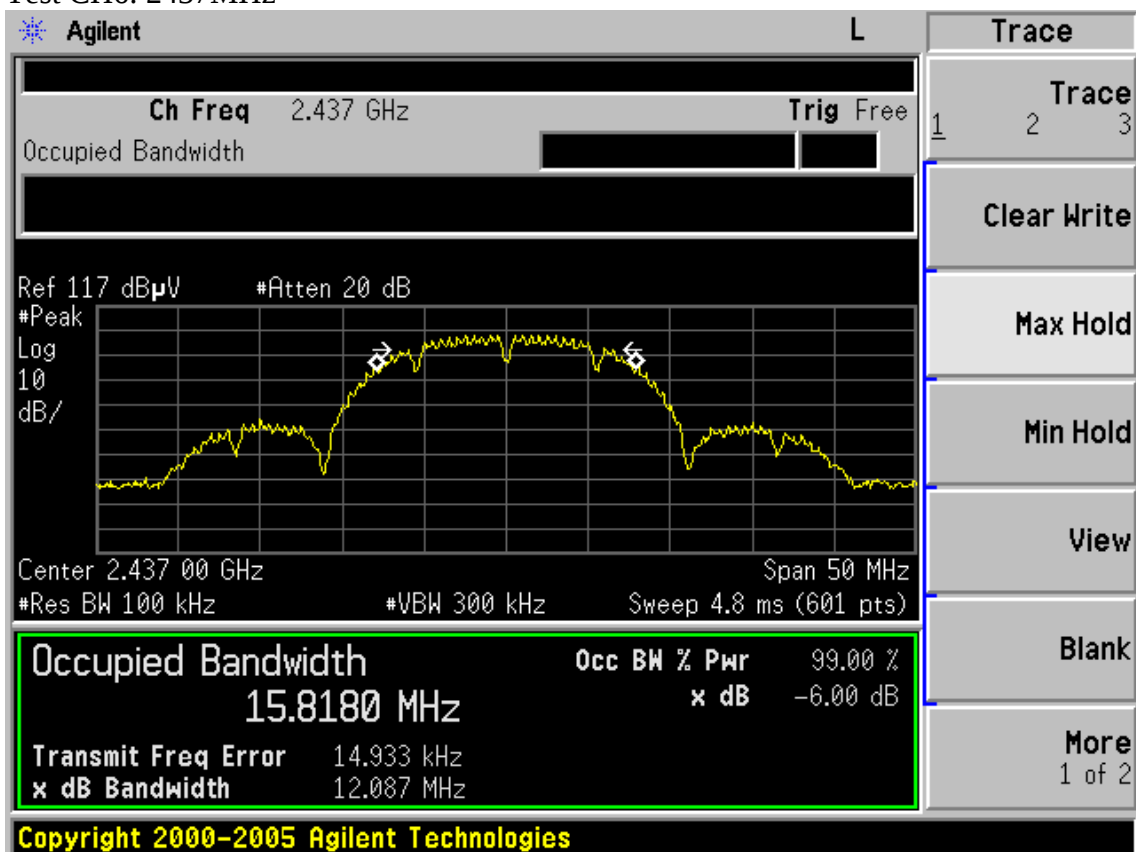


Test CH11: 2462MHz

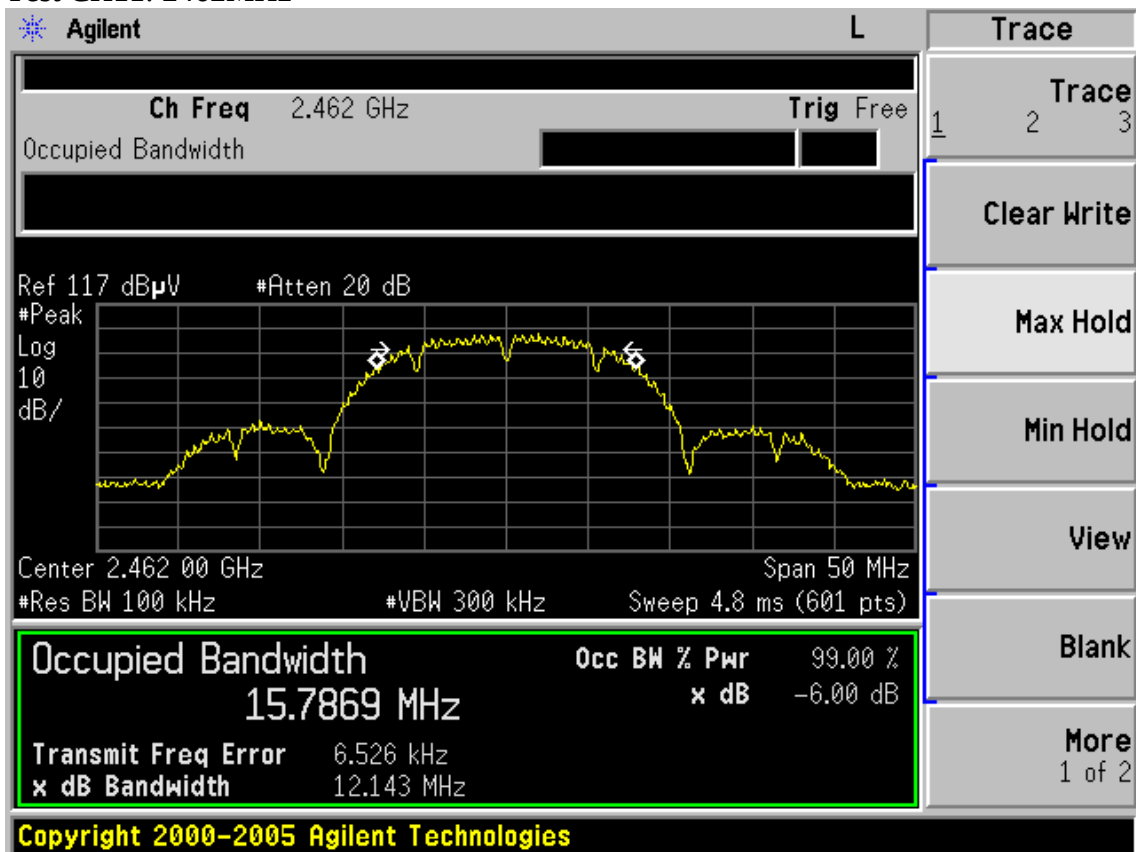


Test Mode: IEEE 802.11g TX


Test CH1: 2412MHz

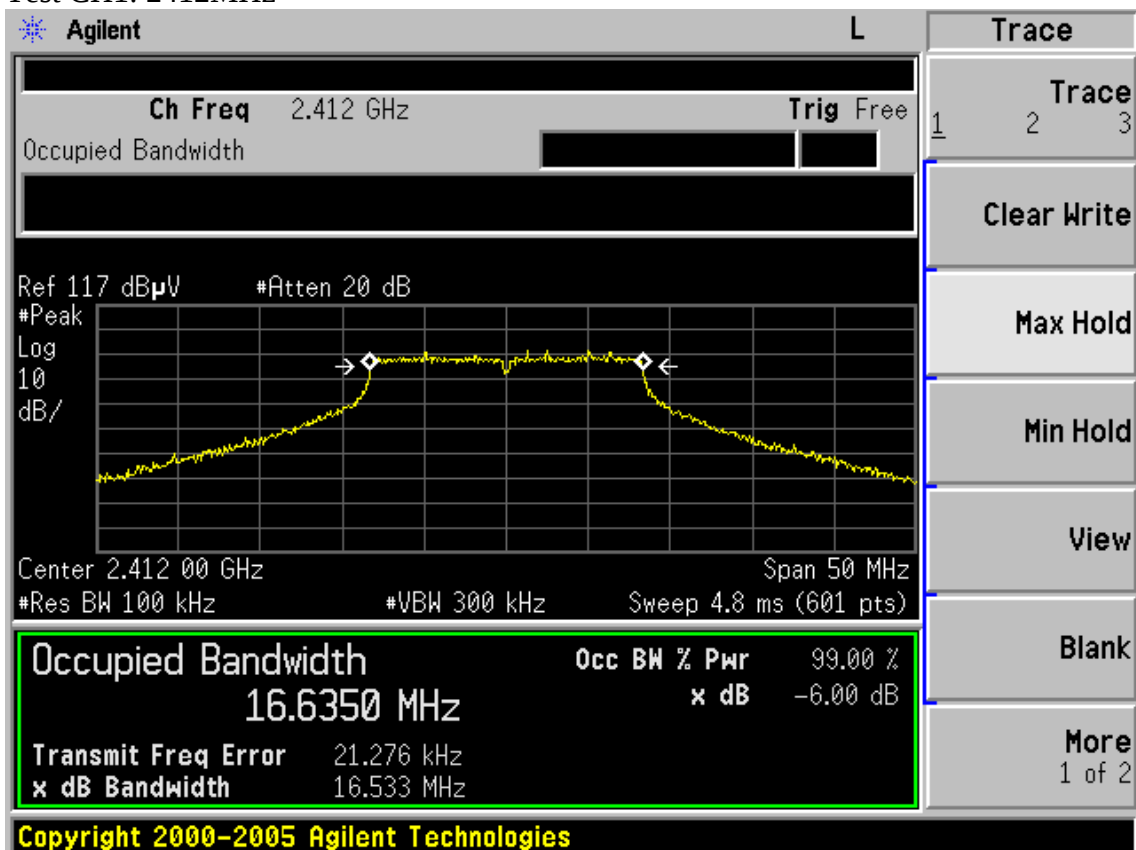

Test CH6: 2437MHz

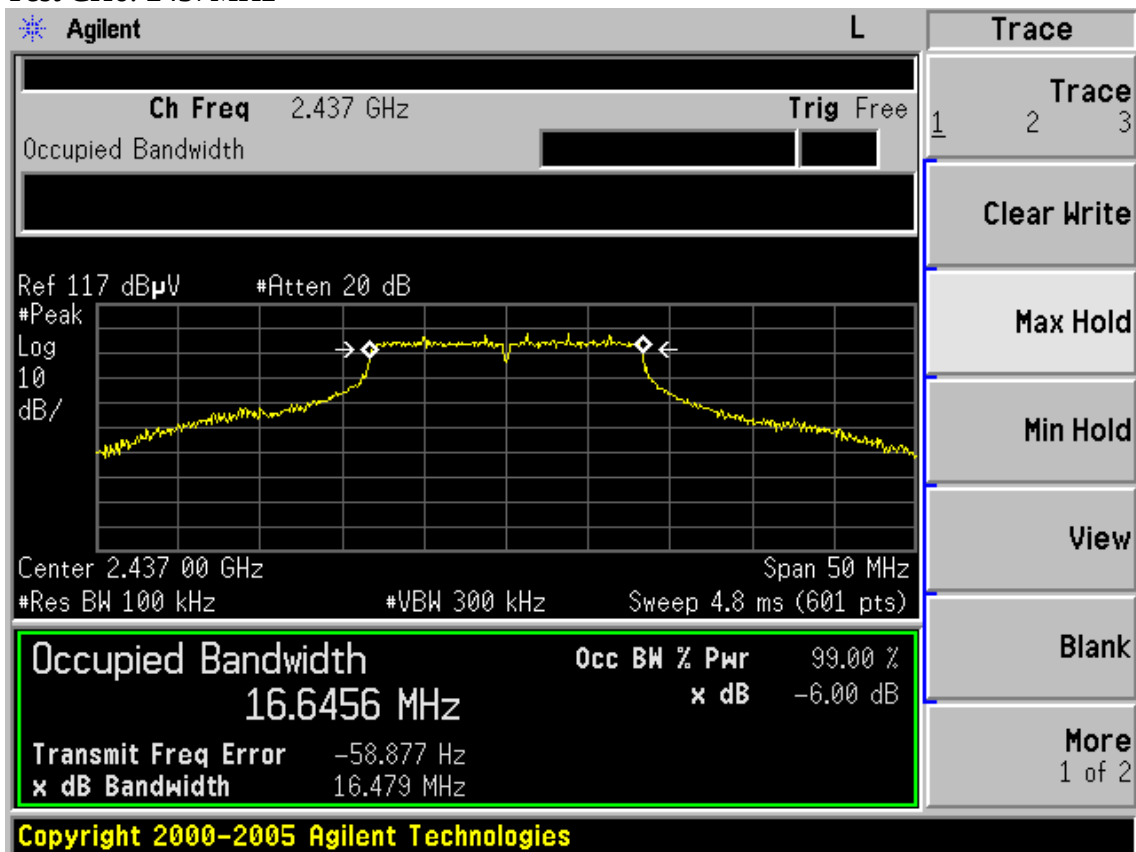


Test CH11: 2462MHz

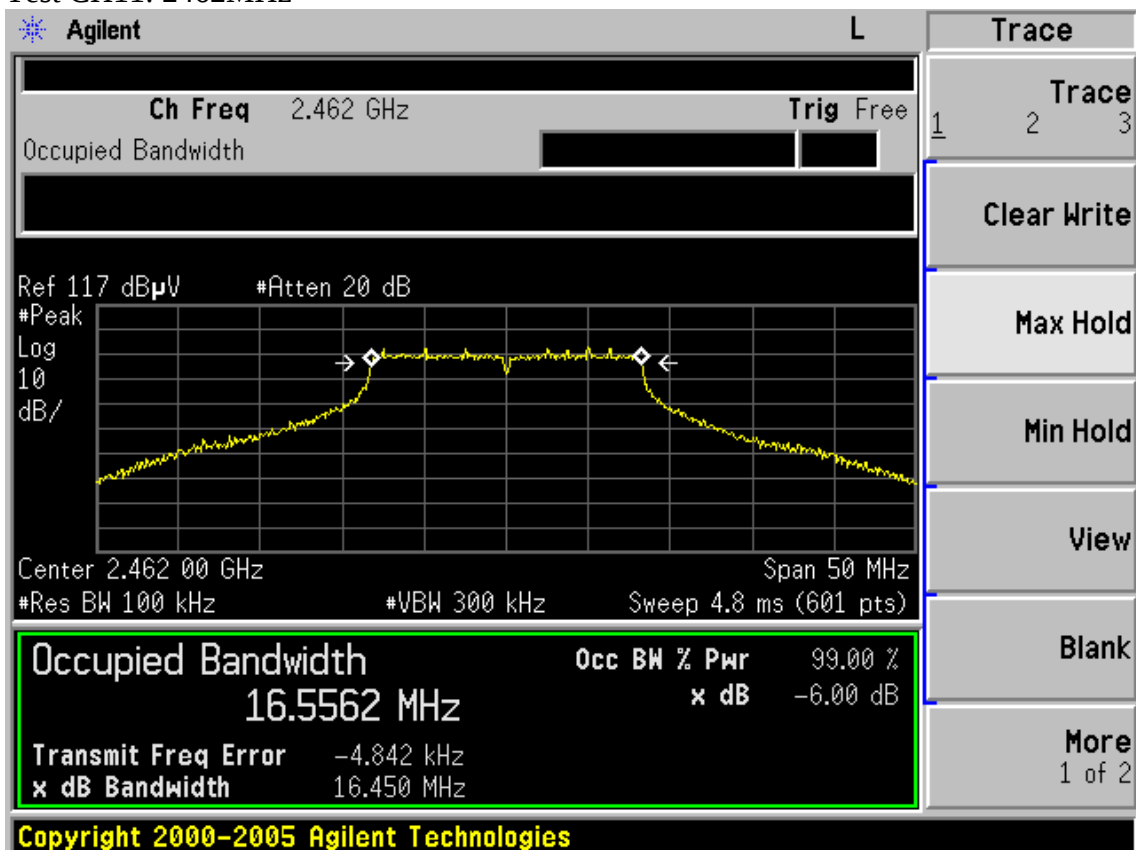


Test Mode: IEEE 802.11n HT20 TX


Test CH1: 2412MHz

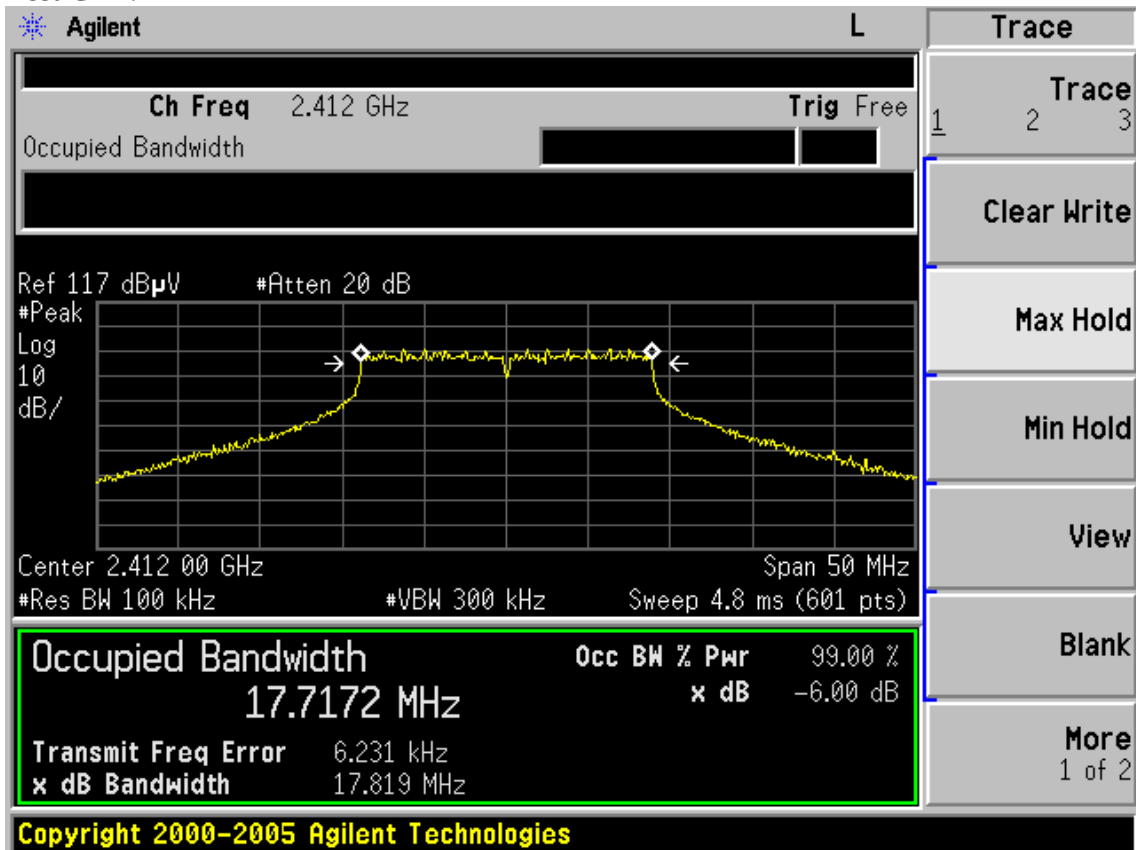

Test CH6: 2437MHz

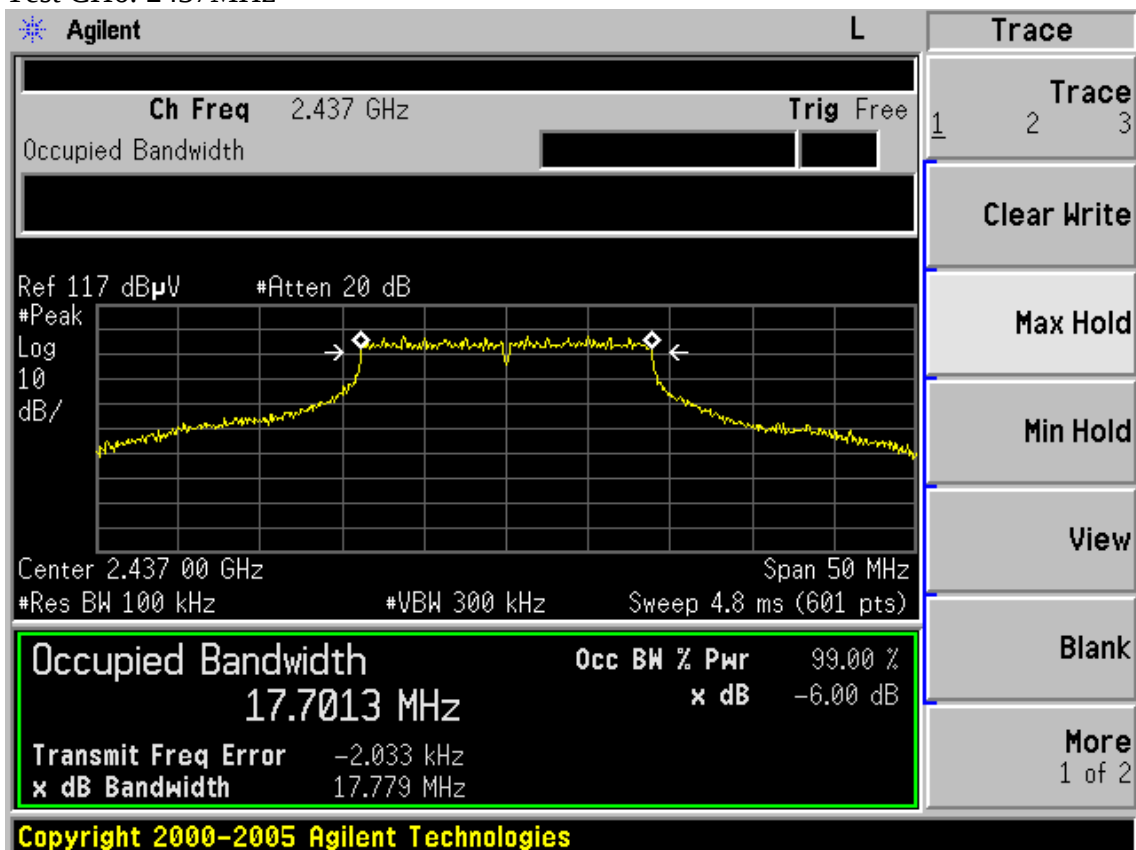


Test CH11: 2462MHz

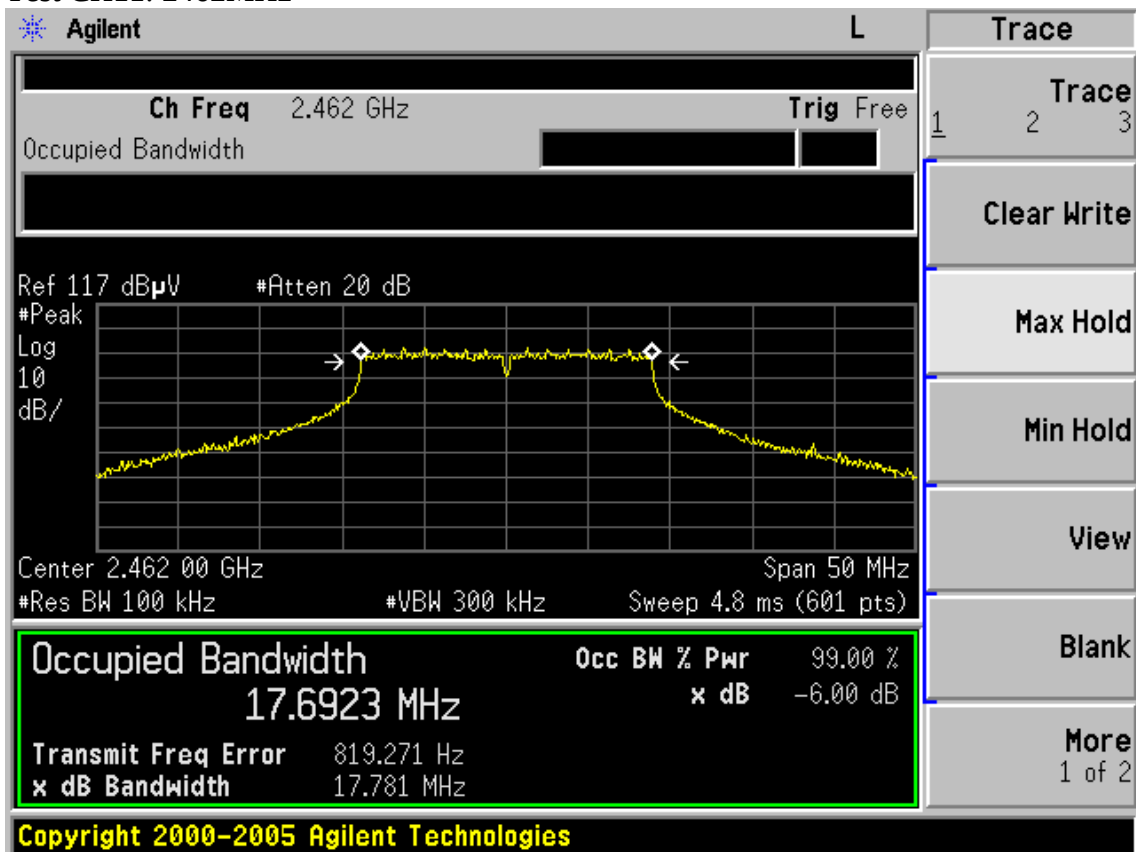


Test Mode: IEEE 802.11n HT40 TX


Test CH1: 2422MHz

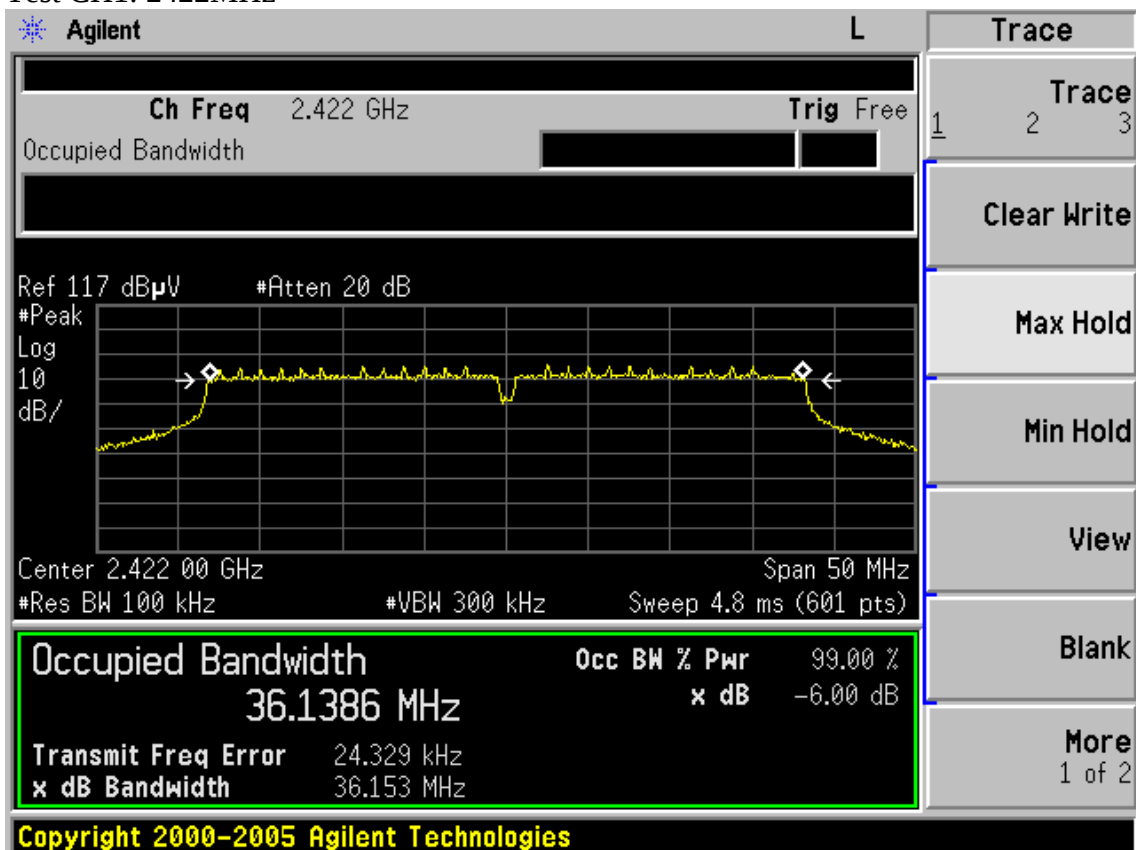

Test CH4: 2437MHz

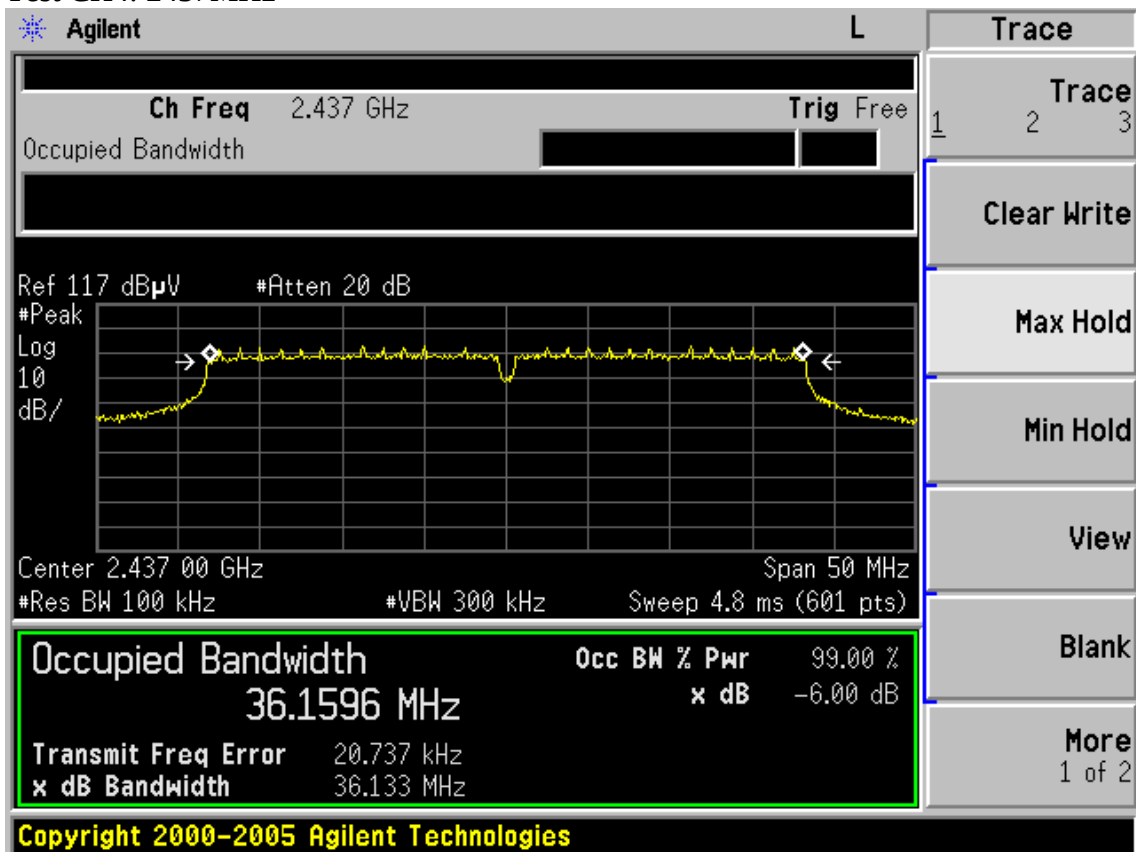

Test CH7: 2452MHz

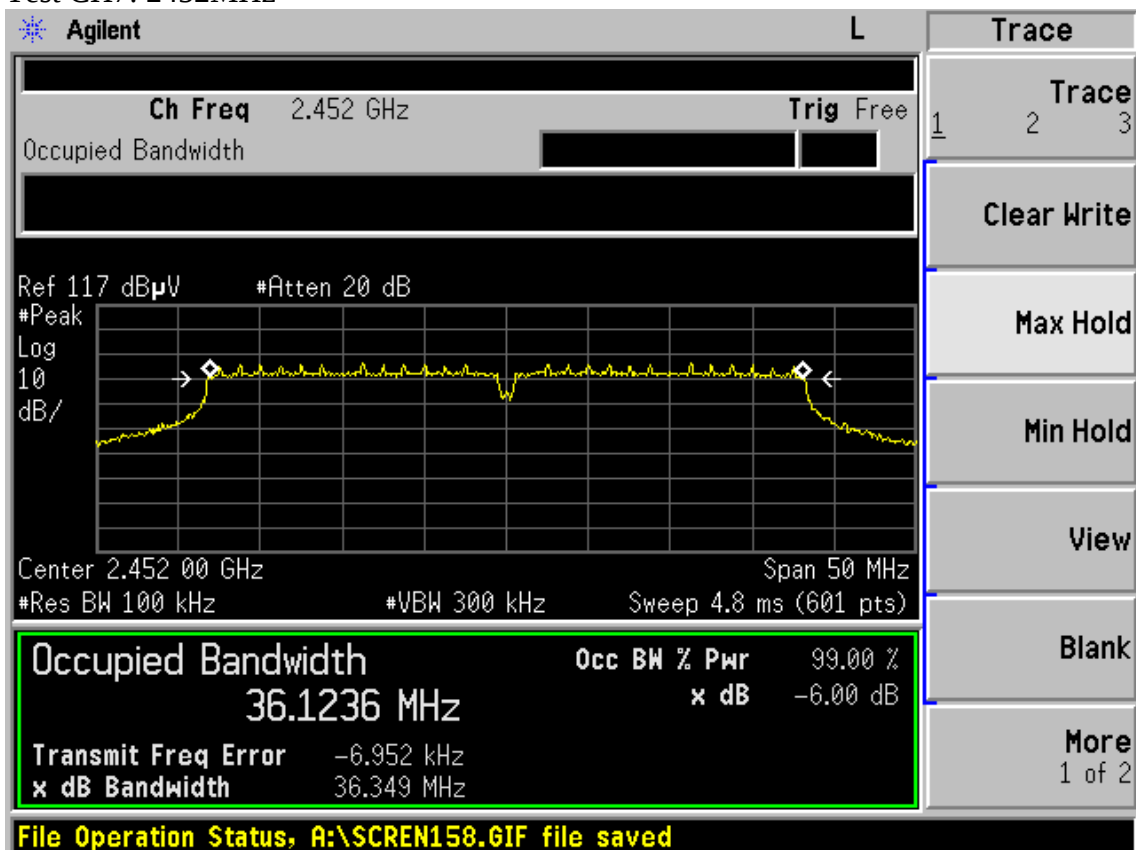

8. OUTPUT POWER TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Power meter	Anritsu	ML2487A	6K00002472	Oct.20.09	1 Year
2	Power sensor	Anritsu	MA2491A	0033005	Oct.20.09	1 Year
3.	Attenuator	Agilent	8491B	MY39262165	May.08,10	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX 102	28618/2	May.08,10	1 Year
5.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,10	1 Year

8.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

8.3. Test Procedure

- 1, Connected the EUT's antenna port to measure device by 20dB attenuator.
- 2, For IEEE 802.11b/g and IEEE802.11n HT20 mode, use a PK power meter which's bandwidth is above 6dB bandwidth of signal to measure out each test modes' PK output power.
- 3, For IEEE802.11n HT40 mode, because the signal's bandwidth is about 40MHz and above 20MHz bandwidth of power sensor ML2491A. So the channel power measure function of Spectrum Analyzer was used to measure out the PK output power of each test modes'



Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


8.4.Test Results

EUT: 150Mbps Wireless AP/Client Router		
M/N: TL-WR743ND		
Test date:2010-06-02	Pressure:100.6 kpa	Humidity:56%
Tested by: Sunny-Lu	Test site: RF site	Temperature : 25℃

Cable loss: 0.6 dB		Attenuator loss: 20 dB	Antenna Gain: 5 dBi
Test Mode	CH	Peak output Power (dBm)	Limit (dBm)
11b	CH1	22.17	30
	CH6	20.80	30
	CH11	20.07	30
11g	CH1	18.67	30
	CH6	24.05	30
	CH11	18.02	30
11n HT20	CH1	17.85	30
	CH6	23.92	30
	CH11	16.83	30
11n HT40	CH1	15.12	30
	CH4	22.04	30
	CH7	13.58	30
Conclusion : PASS			

Original test data for IEEE802.11n HT40

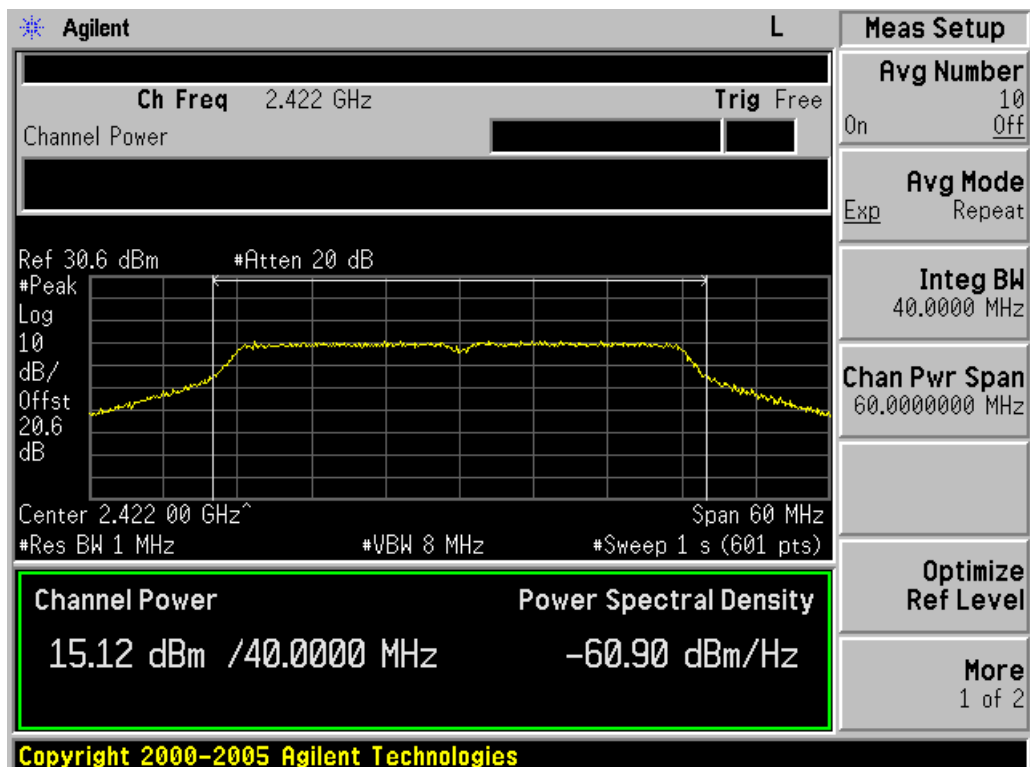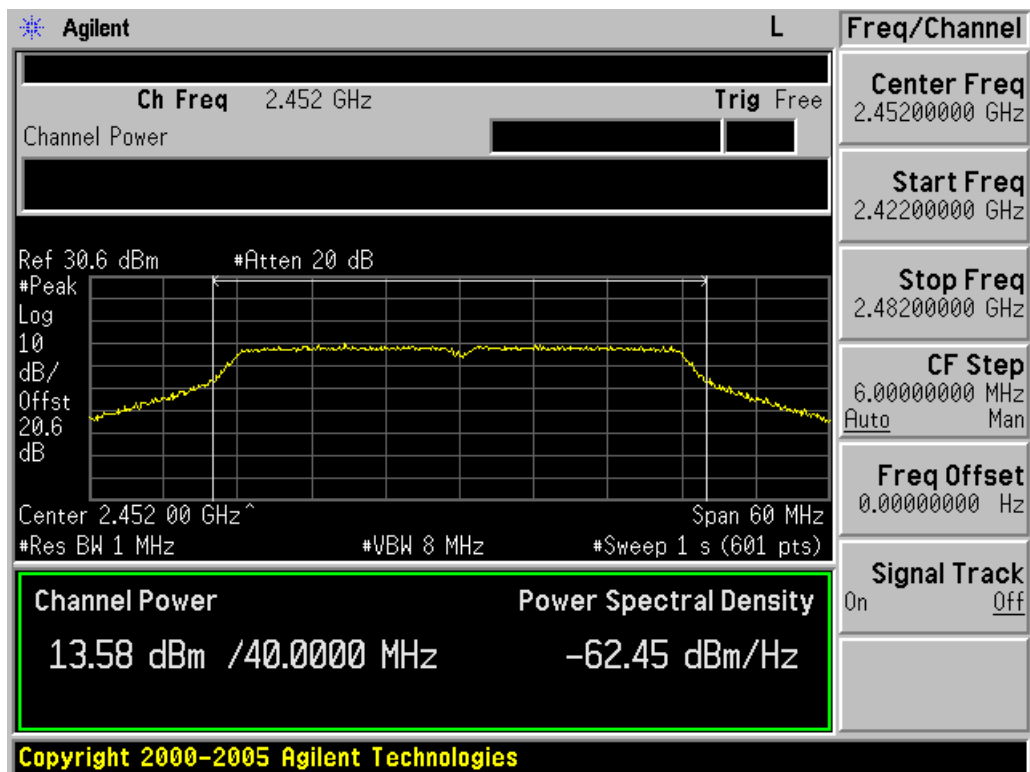

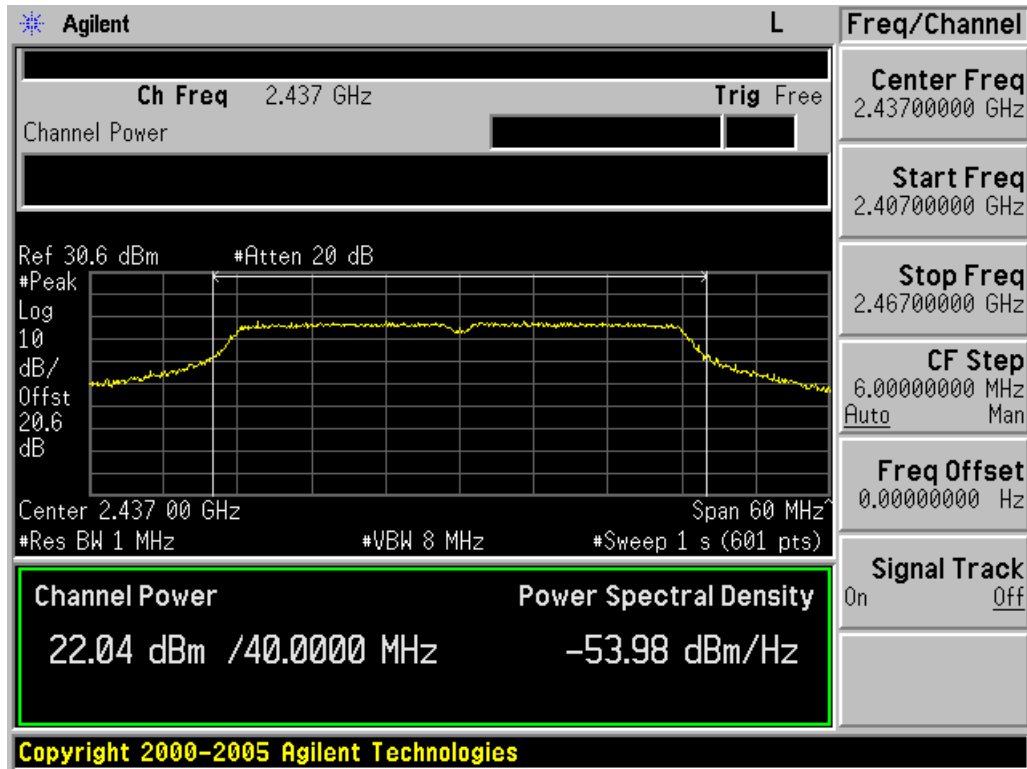

9. POWER SPECTRAL DENSITY TEST

9.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 10	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08, 10	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08, 10	1Year

9.2.Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3.Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device by 20dB attenuator.
- 2, Follow the test procedure as described in ANSI C.10: 2009 Clause 6.11.2.3 to measure out each test modes and chain's power density with 3KHz.



Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


9.4.Test Results

EUT: 150Mbps Wireless AP/Client Router		
M/N: TL-WR743ND		
Test date:2010-06-02	Pressure:100.6 KPa	Humidity:56%
Tested by: Sunny-Lu	Test site: RF site	Temperature : 26℃


Cable loss: 0.6 dB		Attenuator loss: 20 dB	Antenna Gain: 5 dBi
Test Mode	CH	Power density (dBm/3KHz)	Limit (dBm/3KHz)
11b	CH1	-9.07	8
	CH6	-9.07	8
	CH11	-7.59	8
11g	CH1	-15.21	8
	CH6	-9.49	8
	CH11	-14.44	8
11n HT20	CH1	-15.43	8
	CH6	-9.58	8
	CH11	-16.43	8
11n HT40	CH1	-20.14	8
	CH4	-13.25	8
	CH7	-22.73	8
Conclusion : PASS			



Test Mode: IEEE 802.11b TX

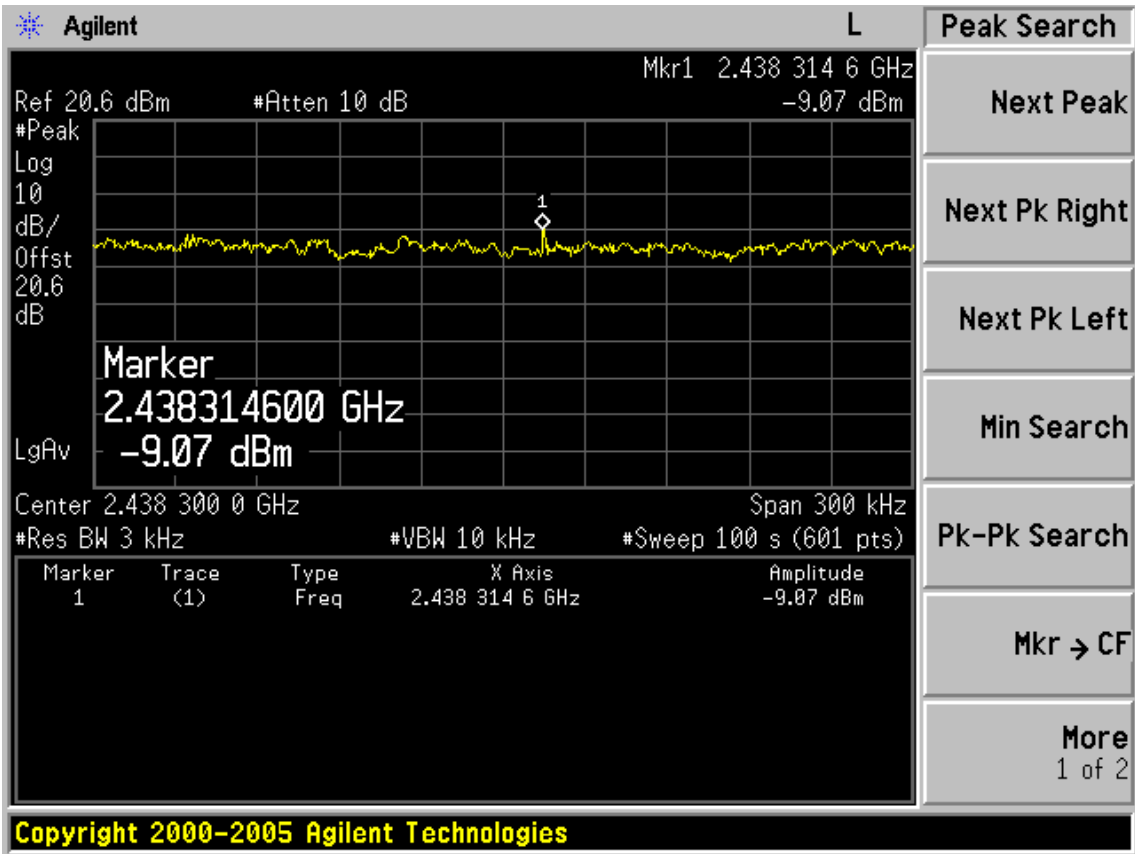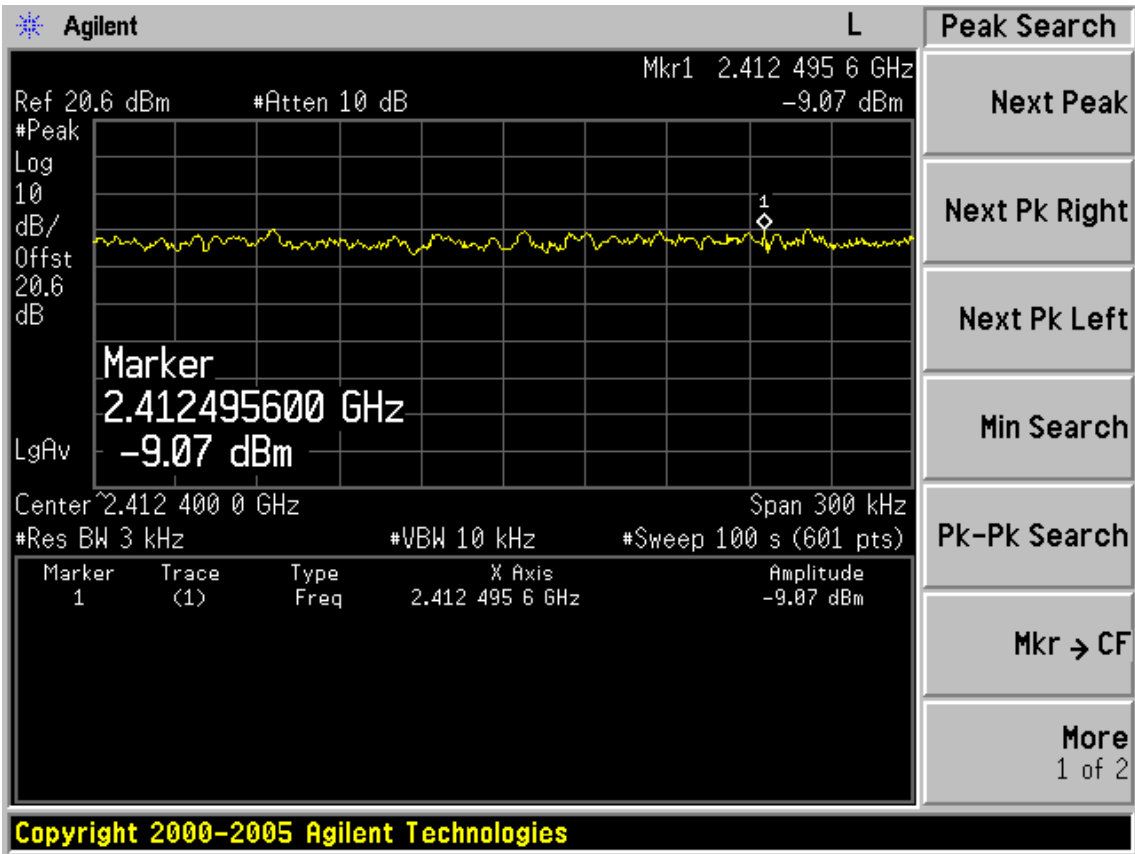


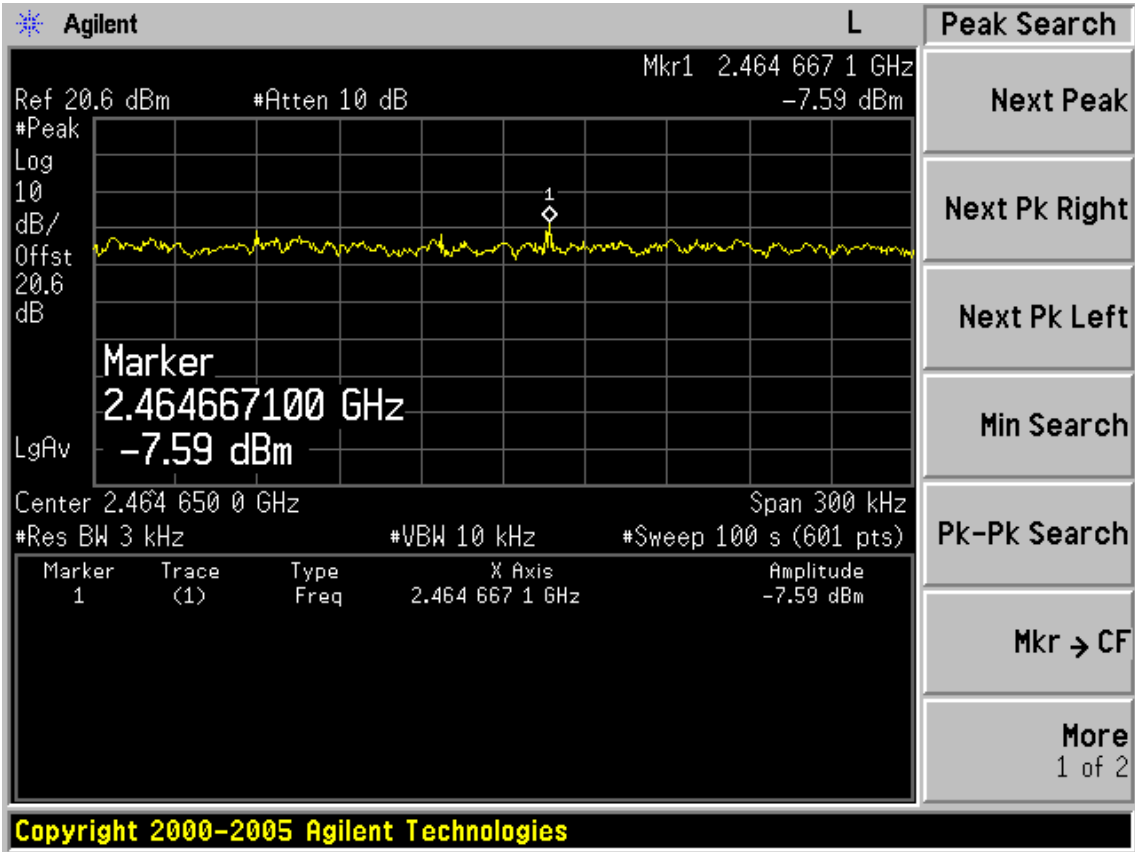



Test Mode: IEEE 802.11g TX

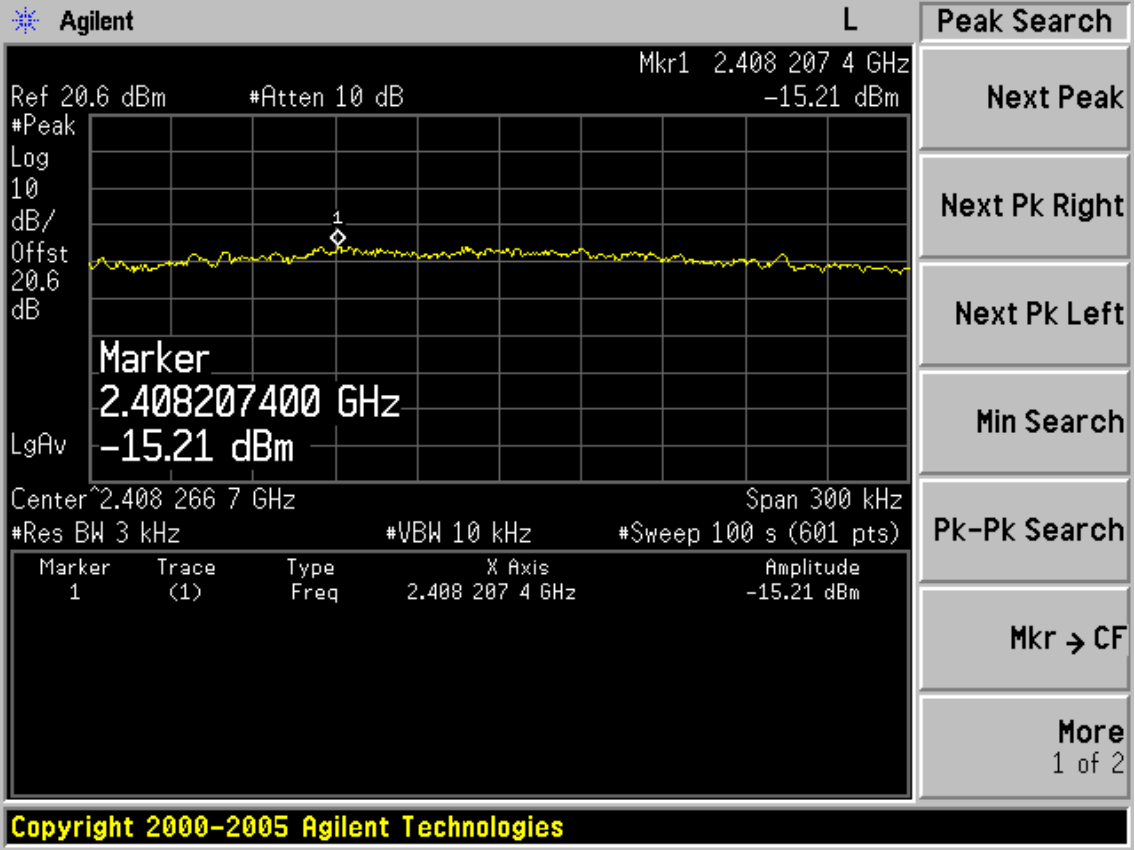

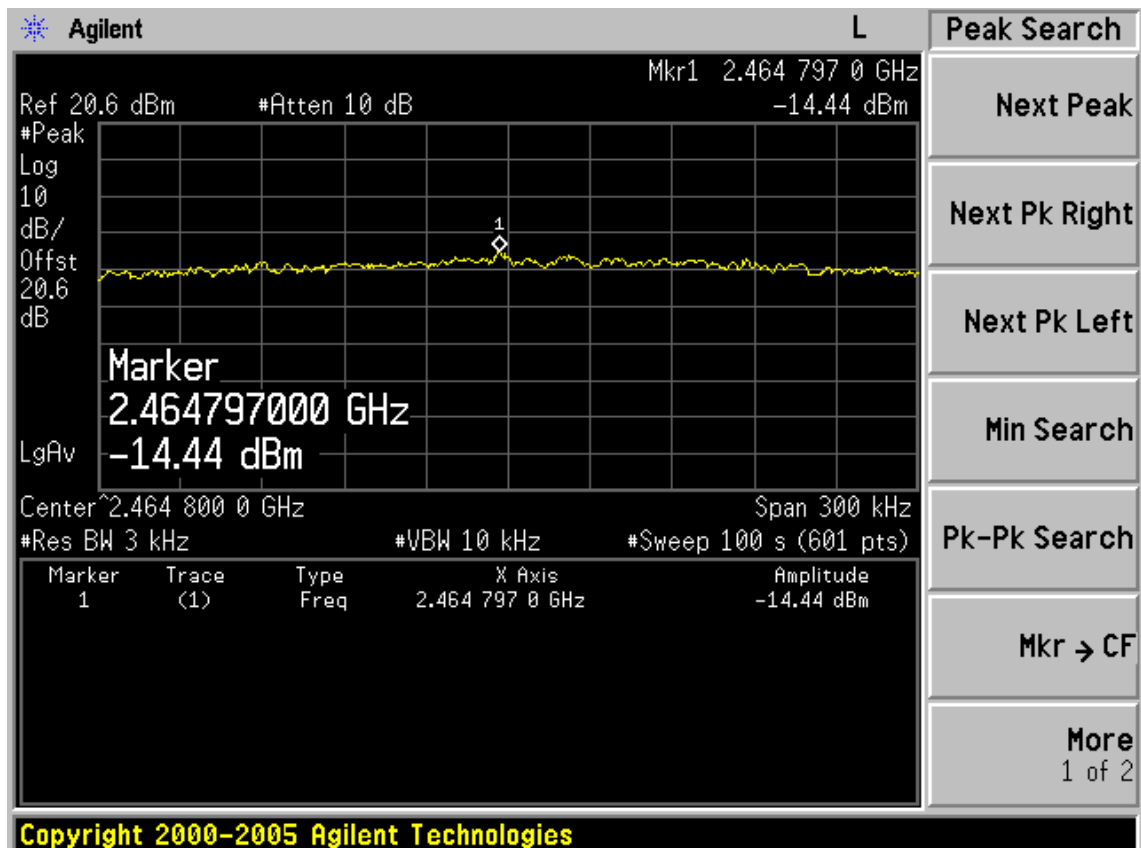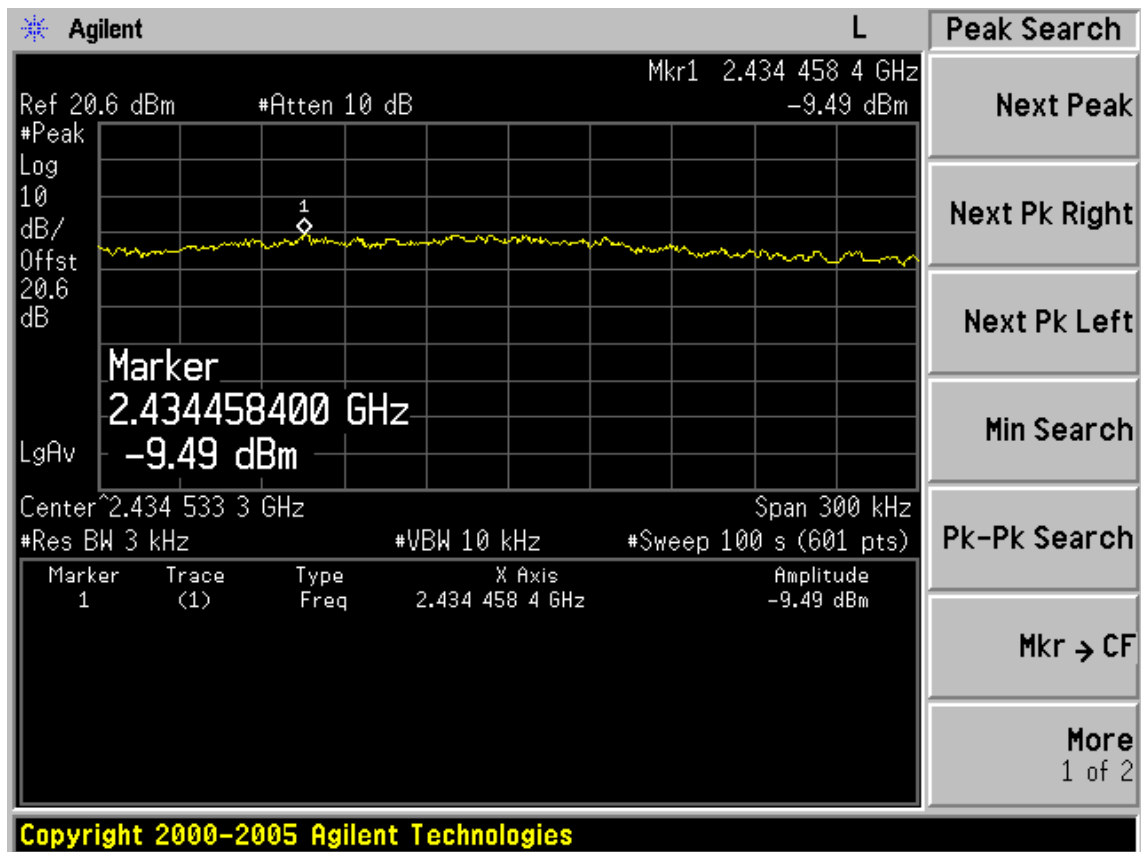




Test Mode: IEEE 802.11n HT20 TX

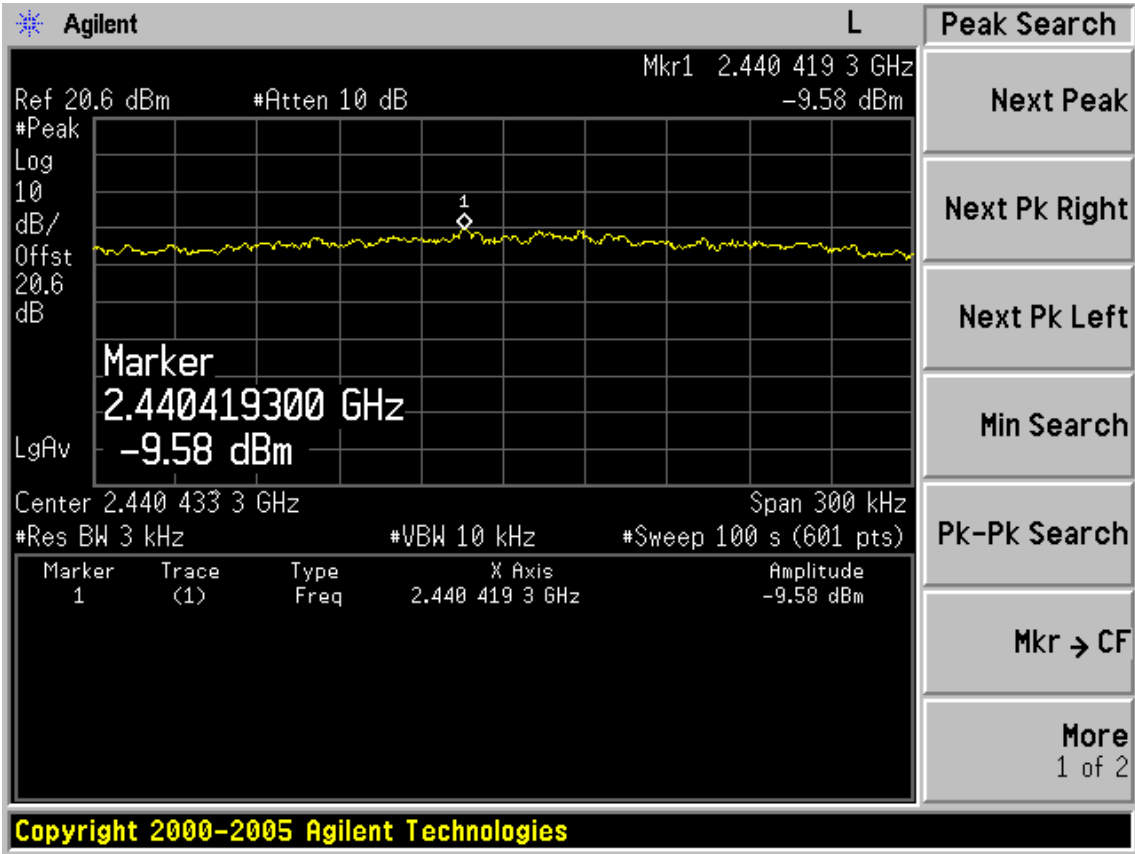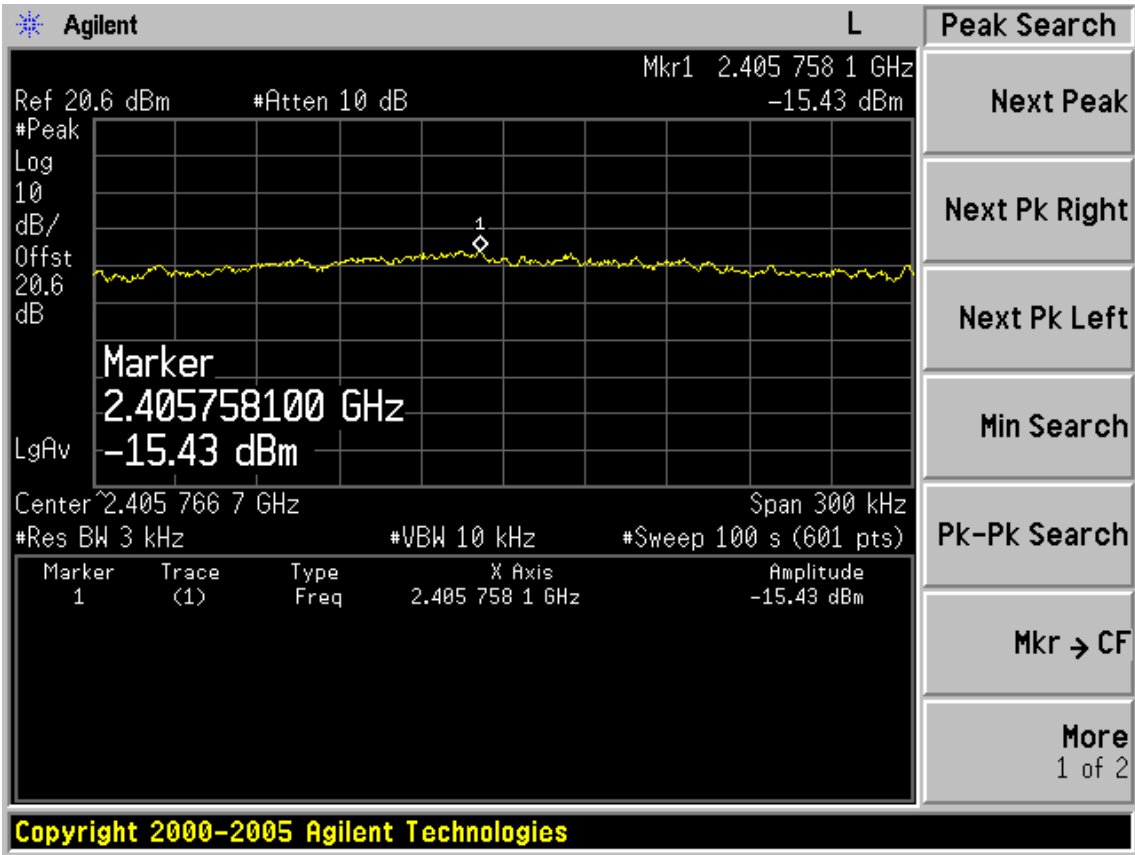

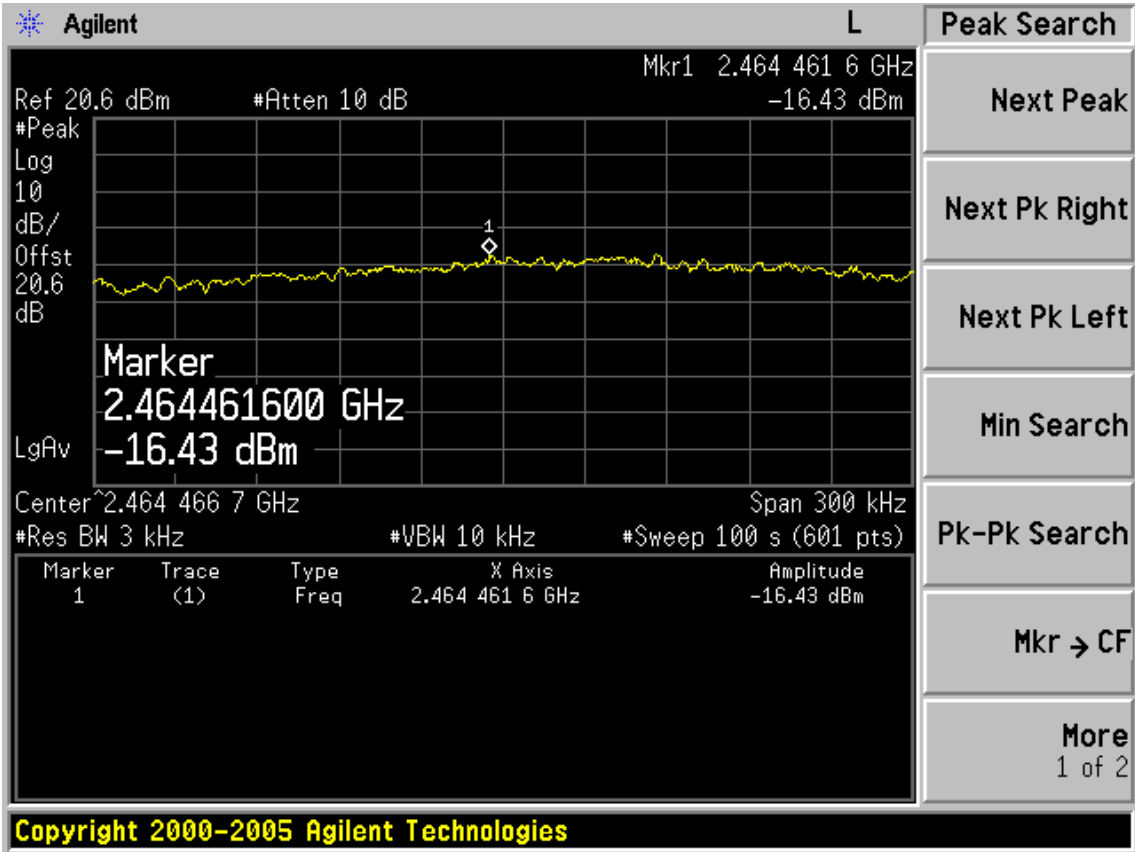

Test Mode: IEEE 802.11n HT40 TX

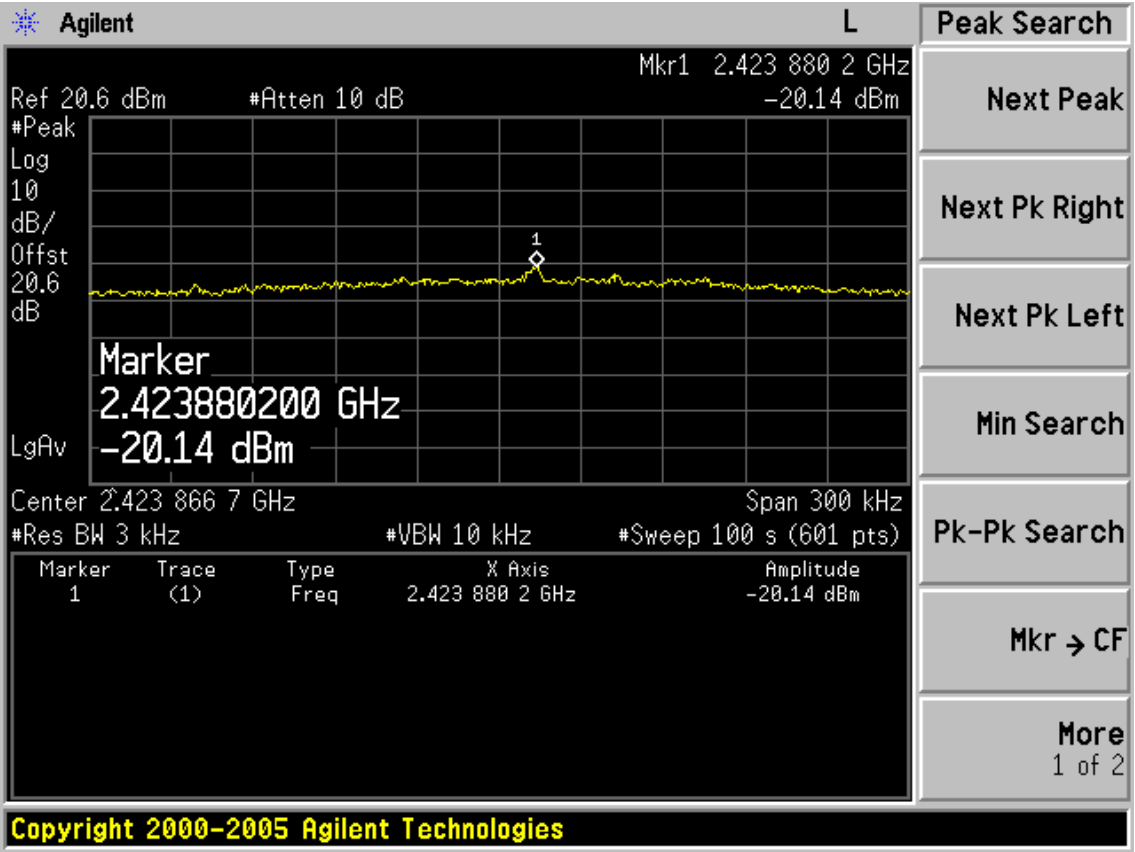

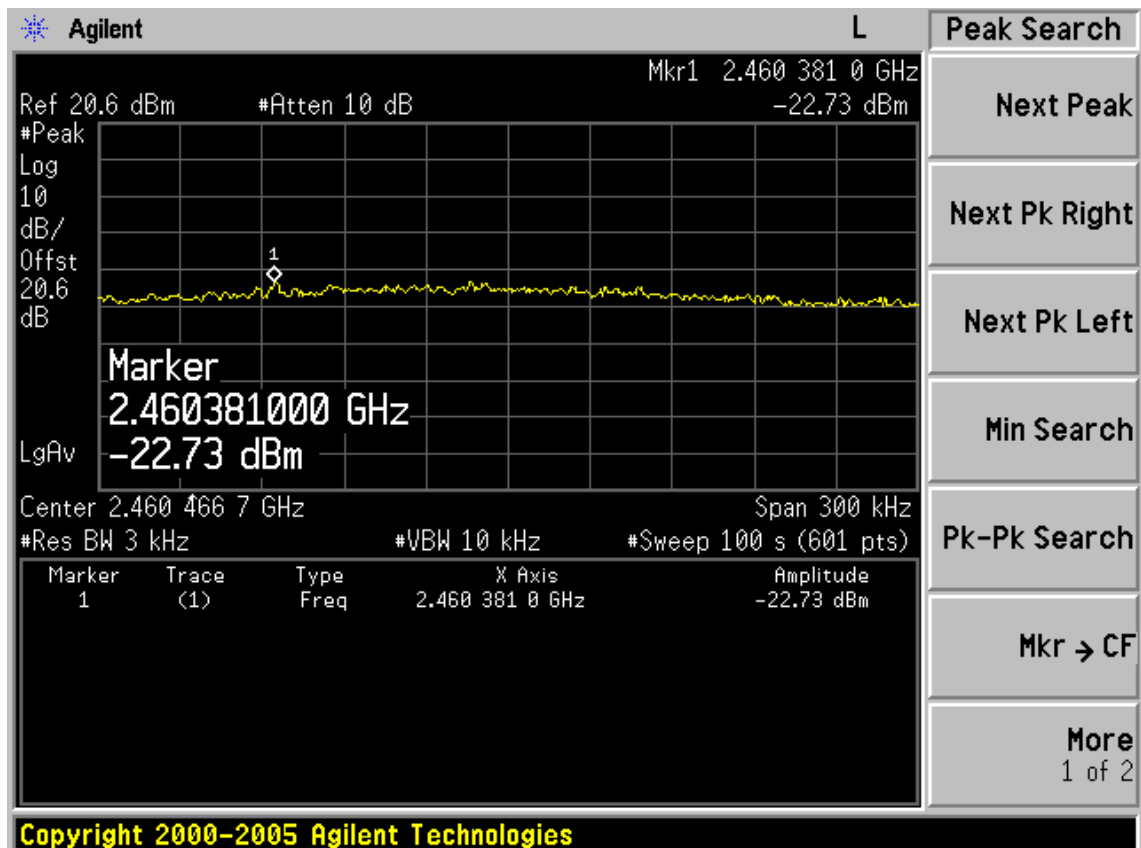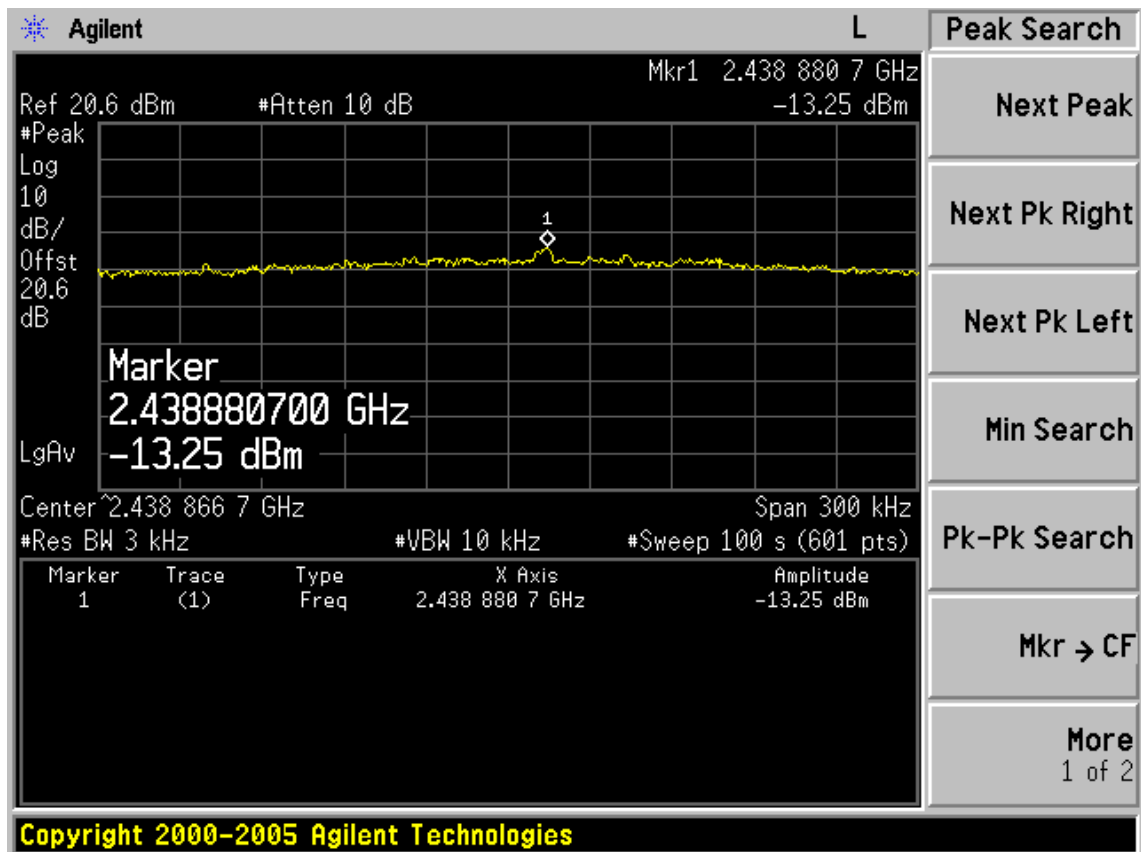

10. ANTENNA REQUIREMENT

10.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2 ANTENNA CONNECTED CONSTRUCTION

The transmit antennas used for this product is dipole antenna with SMA-B connector and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 5dBi.

11.MPE ESTIMATION

11.1.Limit for General Population/ Uncontrolled Exposures

Frequency	Power density (mW/ cm ²)	Averaging time(minutes)
300MHz----1.5GHz	F/1500	30
1.5GHz---100GHz	1.0	30

Frequency(MHz)	Power density (mW/ cm ²)	Averaging time(minutes)
2412	1	30
2437	1	30
2462	1	30

Note: F= Frequency in MHz

11.2.Estimation Result

Mode	CH	Frequency (MHz)	PK Output power (dBm)	Output power (mW)	antenna Gain (dBi)	antenna Gain(linear)	MPE
11b	1	2412	22.17	164.82	5	3.16	0.1037
	6	2437	20.80	120.23	5	3.16	0.0757
	11	2462	20.07	101.62	5	3.16	0.0640
11g	1	2412	18.67	73.62	5	3.16	0.0463
	6	2437	24.05	254.10	5	3.16	0.1599
	11	2462	18.02	63.39	5	3.16	0.0399
11n HT20	1	2412	17.85	60.95	5	3.16	0.0384
	6	2437	23.92	246.60	5	3.16	0.1552
	11	2462	16.83	48.19	5	3.16	0.0303
11n HT40	1	2422	15.12	32.51	5	3.16	0.0205
	4	2437	22.04	159.96	5	3.16	0.1007
	7	2452	13.58	22.80	5	3.16	0.0144

Note: The estimation distance is 20cm

12.DEVIATION TO TEST SPECIFICATIONS

[NONE]