



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:1 of 22
Date:Apr. 25, 2005

Product Name: Car MP3 Player
Model No.: MD-4
Applicant: MiraDeed Techology Corp.
1F., No. 5, Lane 25, Yishou 2nd St., Taoyuan,
Taiwan, R.O.C.
Date of Receipt: Apr. 06, 2005
Finished date of Test: Apr. 25, 2005
Applicable Standards: 47 CFR Part 15, Subpart C
ANSI C63.4:2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By : Hugo Yeh, Date: 4/25/2005
(Hugo Yeh)

Approved By : James Ho Date: April 25, 2005
(Johnson Ho, Director)

NVLAP
Lab Code: 200099-0



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:2 of 22
Date:Apr. 25, 2005

Table of Contents

1.	DOCUMENT POLICY AND TEST STATEMENT	3
1.1	DOCUMENT POLICY	3
1.2	TEST STATEMENT	3
1.3	EUT MODIFICATION	3
2.	DESCRIPTION OF EUT AND TEST MODE	4
2.1	GENERAL DESCRIPTION OF EUT	4
2.2	DESCRIPTION OF EUT INTERNAL DEVICE	4
2.3	DESCRIPTION OF TEST MODE	5
2.4	DESCRIPTION OF SUPPORT UNIT	5
3.	DESCRIPTION OF APPLIED STANDARDS	5
4.	CONDUCTED EMISSION TEST	6
4.1	CONDUCTED EMISSION LIMIT	6
4.2	TEST EQUIPMENT	6
4.3	TEST SETUP	7
4.4	TEST PROCEDURE	7
4.5	EUT OPERATING CONDITION	7
4.6	TEST RESULT	8
5.	RADIATED EMISSION TEST	11
5.1	RADIATED EMISSION LIMIT	11
5.2	TEST EQUIPMENT	12
5.3	TEST SET-UP	13
5.4	TEST PROCEDURE	14
5.5	EUT OPERATING CONDITION	14
5.6	RADIATED EMISSION TEST RESULT	15
6.	BANDWIDTH TEST	18
6.1	LIMIT	18
6.2	TEST EQUIPMENT	18
6.3	TEST SET-UP	18
6.4	TEST PROCEDURE	18
6.5	EUT OPERATING CONDITION	18
6.6	TEST RESULT	19
7.	PHOTOS OF TESTING	20
8.	TERMS OF ABRIVATION	22

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:3 of 22 Date:Apr. 25, 2005
---	----------------------	---

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP, TÜV, NEMKO and SRT.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 Vac/60 Hz, was used during the test.

1.3 EUT MODIFICATION

- No modification in SRT Lab.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:4 of 22 Date:Apr. 25, 2005
---	----------------------	---

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	CAR-MP3 PLAYER(FM Transmitter)
MODEL NO.	MD-4
POWER SUPPLY	DC 12V/24V, 0.1A
FREQUENCY BAND	88.1~108MHz
CARRIER FREQUENCY	4MHz
NUMBER OF CHANNEL	4
CHANNEL SPACING	200 kHz
RATED RF OUTPUT POWER	-10 dBm(0.1mW)
L.O.	107 MHz
MODULATION TYPE	FM
MODE OF OPERATION	Simplex
BIT RATE OF TRANSMISSION	MAX 256Kbps
ANTENNA TYPE	Loop Antenna

NOTE :

For more detailed features, please refer to the manufacturer's specification or User's Manual.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:5 of 22 Date:Apr. 25, 2005
---	----------------------	---

2.3 DESCRIPTION OF TEST MODE

The EUT was tested for emission measurement under the following situations:

Mode	
1	106.7MHz
2	106.9MHz
3	107.3MHz

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4:2003 and CISPR22:2003. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE
1	USB MP3 Player		HT-653	N/A	N/A
2	Receiver	PROSOUND	PR-6877	DOC	1.5m unshielded power cord 1.5m shielded data cable
3	Antenna	MiraDeed	N/A	N/A	0.6m unshielded cable

NOTE : For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product for car. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

ANSI C63.4:2003

All tests have been performed and recorded as per the above standards.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:6 of 22 Date:Apr. 25, 2005
---	----------------------	---

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION LIMIT

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 30 MHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	AUG. 2005 ETC
LISN (for EUT)	50 μ H, 50 ohm	FCC	FCC-LISN-50-25-2/ 01017	NOV. 2005 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	FCC	FCC-LISN-50-25-2/ 01018	NOV. 2005 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	OCT. 2005 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2005 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	N/A
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	N/A

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.3 TEST SETUP

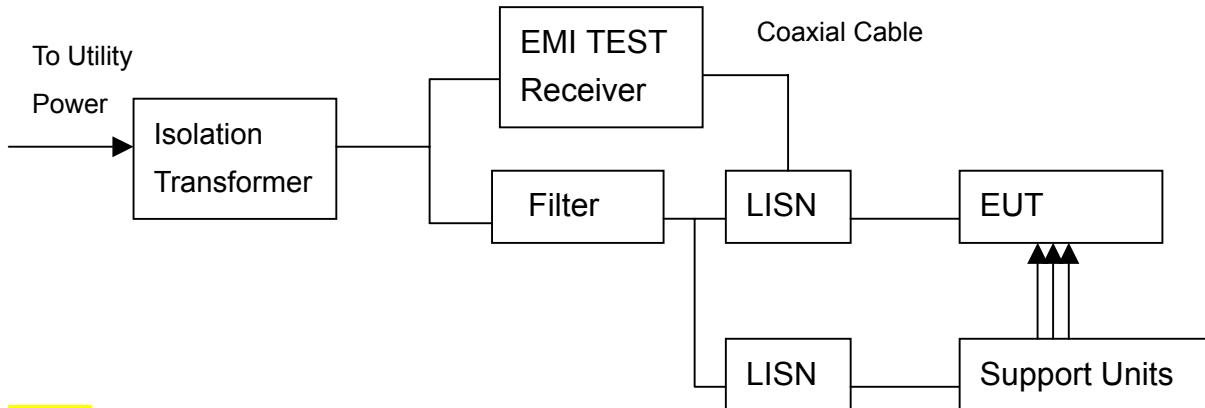

NOTE:

1. The EUT was put on a wooden table with 0.8m heights above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 01017.
4. The serial no. of the LISN connected to support units is 01018.

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50 μ H as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.5 EUT OPERATING CONDITION

1. Set the EUT under transmission condition continuously at specific channel frequency.
2. Play music.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:8 of 22 Date:Apr. 25, 2005
---	----------------------	---

4.6 TEST RESULT

Temperature:	24°C	Humidity:	54 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	106.7MHz
Receiver Detector:	Q.P. and AV.	Tested Date:	Apr. 25, 2005
Tested By:	Hugo Yeh		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.177	0.30	35.00	25.33	35.30	25.63	64.61	54.61	-29.31	-28.98
2.101	0.18	12.42	7.40	12.60	7.58	56.00	46.00	-43.40	-38.42
2.200	0.18	10.60	5.70	10.78	5.88	56.00	46.00	-45.22	-40.12
7.598	0.48	31.56	31.29	32.04	31.77	60.00	50.00	-27.96	-18.23
13.303	0.75	26.76	25.41	27.51	26.16	60.00	50.00	-32.49	-23.84
24.573	0.10	37.20	35.22	37.30	35.32	60.00	50.00	-22.70	-14.68

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.180	0.30	33.80	26.10	34.10	26.40	64.47	54.47	-30.37	-28.07
1.497	0.29	15.60	10.80	15.89	11.09	56.00	46.00	-40.11	-34.91
1.527	0.29	13.20	7.80	13.49	8.09	56.00	46.00	-42.51	-37.91
7.598	0.37	30.30	30.20	30.67	30.57	60.00	50.00	-29.33	-19.43
13.303	0.81	26.70	26.10	27.51	26.91	60.00	50.00	-32.49	-23.09
15.205	0.92	39.70	39.60	40.62	40.52	60.00	50.00	-19.38	-9.48

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:9 of 22 Date:Apr. 25, 2005
---	----------------------	---

Temperature:	24°C	Humidity:	54 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	106.9MHz
Receiver Detector:	Q.P. and AV.	Tested Date:	Apr. 25, 2005
Tested By:	Hugo Yeh		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.189	0.30	26.40	18.90	26.70	19.20	64.06	54.06	-37.36	-34.86
1.675	0.19	12.50	7.10	12.69	7.29	56.00	46.00	-43.31	-38.71
3.210	0.19	13.80	7.80	13.99	7.99	56.00	46.00	-42.01	-38.01
7.598	0.48	18.50	18.30	18.98	18.78	60.00	50.00	-41.02	-31.22
12.288	0.71	18.80	17.30	19.51	18.01	60.00	50.00	-40.49	-31.99
22.800	0.10	20.80	20.70	20.90	20.80	60.00	50.00	-39.10	-29.20

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.177	0.30	29.80	24.90	30.10	25.20	64.61	54.61	-34.51	-29.41
1.754	0.28	13.80	8.40	14.08	8.68	56.00	46.00	-41.92	-37.32
1.794	0.28	13.50	8.10	13.78	8.38	56.00	46.00	-42.22	-37.62
7.598	0.37	14.30	13.80	14.67	14.17	60.00	50.00	-45.33	-35.83
12.288	0.75	15.90	13.82	16.65	14.57	60.00	50.00	-43.35	-35.43
24.573	0.10	19.60	17.80	19.70	17.90	60.00	50.00	-40.30	-32.10

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:10 of 22 Date:Apr. 25, 2005
---	----------------------	--

Temperature:	24°C	Humidity:	54 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	107.3MHz
Receiver Detector:	Q.P. and AV.	Tested Date:	Apr. 25, 2005
Tested By:	Hugo Yeh		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.234	0.29	30.30	15.60	30.59	15.89	62.29	52.29	-31.70	-36.40
1.645	0.19	14.10	8.70	14.29	8.89	56.00	46.00	-41.71	-37.11
1.695	0.19	13.90	8.50	14.09	8.69	56.00	46.00	-41.91	-37.31
7.598	0.48	17.70	17.50	18.18	17.98	60.00	50.00	-41.82	-32.02
12.288	0.71	19.20	17.10	19.91	17.81	60.00	50.00	-40.09	-32.19
25.998	0.10	18.10	16.20	18.20	16.30	60.00	50.00	-41.80	-33.70

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.168	0.30	34.20	30.70	34.50	31.00	65.04	55.04	-30.54	-24.04
1.596	0.29	14.20	8.60	14.49	8.89	56.00	46.00	-41.51	-37.11
1.655	0.29	14.30	8.70	14.59	8.99	56.00	46.00	-41.41	-37.01
7.598	0.37	17.40	17.10	17.77	17.47	60.00	50.00	-42.23	-32.53
12.288	0.75	18.30	16.70	19.05	17.45	60.00	50.00	-40.95	-32.55
22.800	0.50	20.70	20.60	21.20	21.10	60.00	50.00	-38.80	-28.90

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:11 of 22 Date:Apr. 25, 2005
---	----------------------	--

5. RADIATED EMISSION TEST

5.1 RADIATED EMISSION LIMIT

FCC Part 15, Subpart C Section 15.227.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)	
		PEAK	AVERAGE
26.96 - 27.28	3	100.0	80.0

FCC Part 15, Subpart B Section 15.209.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
Above 960	3	54.0

NOTE :

1. In the emission tables above , the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antemma, and the closest point of any part of the device or system.

CISPR 22:2003 limits of radiated emission measurement for frequency below 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dB μ V/m	dB μ V/m
30 – 230	40	30
230 - 1000	47	37

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:12 of 22 Date:Apr. 25, 2005
---	----------------------	--

5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	OCT. 2005 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	FEB. 2006 SRT
SPECTRUM ANALYZER	9 KHz TO 26.5 GHz	HP	8593E/ 3710A03220	MAY 2005 ETC
PRE-AMPLIFIER	1 GHz TO 26.5 GHz	HP	8449B/ 3008A01019	NOV. 2005 ETC
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/ 9602-4681	DEC. 2005 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	DEC. 2005 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2005 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	AUG. 2005 SRT

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.




**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:13 of 22
Date:Apr. 25, 2005

5.3 TEST SET-UP

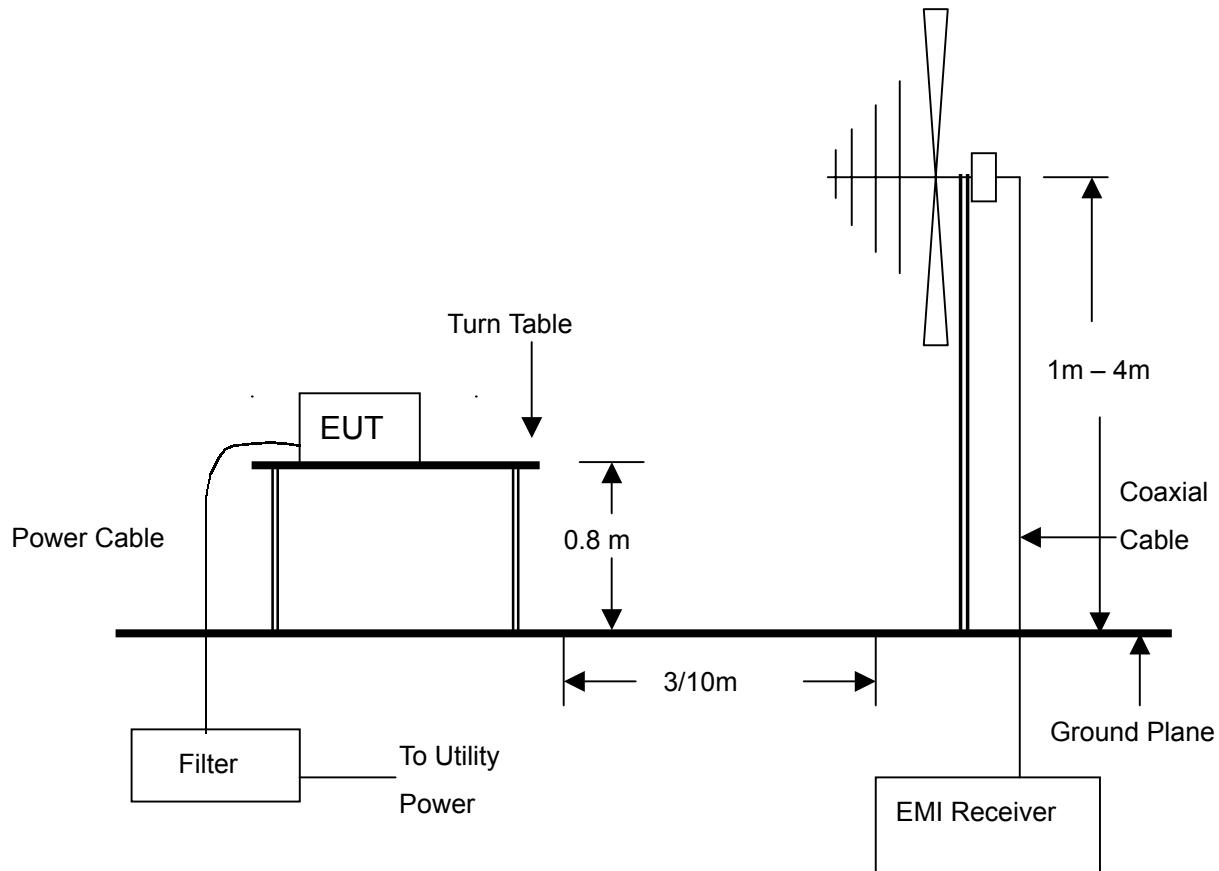

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:14 of 22
Date:Apr. 25, 2005

5.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR 22:2003. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver.

Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

5.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:15 of 22 Date:Apr. 25, 2005
---	----------------------	--

5.6 RADIATED EMISSION TEST RESULT

Temperature:	27°C	Humidity:	55 %RH
Frequency Range:	88 - 108 MHz	Measured Distance:	3m
Receiver Detector:	AV.	Tested Mode:	TX (Fundamental Frequency)
Tested Date:	Apr. 19, 2005		106.7MHz
Tested By:	Hugo Yeh		

Fundamental frequency of transmitter

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
106.703(F)	H	1.52	7.48	30.8	39.8	67.96	-28.16
106.702(F)	V	1.52	7.48	29.6	38.6	67.96	-29.36

Receiver Detector: Q.P. Tested Mode: TX (Harmonic)

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
217.2200	H	2.12	10.11	14.2	26.4	46.0	-19.6
336.4000	H	3.02	14.86	13.5	31.4	46.0	-14.6
348.5200	H	3.25	15.11	13.7	32.1	46.0	-13.9
373.9200	H	3.21	15.63	12.4	31.2	46.0	-14.8
431.1000	H	3.01	16.60	15.3	34.9	46.0	-11.1
444.4600	H	2.97	16.77	14.5	34.2	46.0	-11.8
120.2540	V	1.33	7.20	14.6	23.1	43.5	-20.4
191.4000	V	2.02	9.36	14.2	25.6	43.5	-17.9
212.5000	V	1.96	9.90	15.6	27.5	43.5	-16.0
337.8200	V	3.04	14.88	14.8	32.7	46.0	-13.3
431.1200	V	3.01	16.60	13.4	33.0	46.0	-13.0
529.1600	V	3.60	17.99	12.1	33.7	46.0	-12.3

NOTE :

1. Measurement uncertainty is less than +/- 2dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. (F) : Fundamental frequency of transmitter.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:16 of 22
Date:Apr. 25, 2005

Temperature:	27°C	Humidity:	55 %RH
Frequency Range:	88 - 108 MHz	Measured Distance:	3m
Receiver Detector:	AV.	Tested Mode:	TX (Fundamental
Tested Date:	Apr. 19, 2005		Frequency)
Tested By:	Hugo Yeh		106.9MHz

Fundamental frequency of transmitter

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
106.902(F)	H	1.52	7.48	32.3	41.3	67.96	-26.7
106.902(F)	V	1.52	7.48	31.8	40.8	67.96	-27.2

Receiver Detector: Q.P. Tested Mode: TX (Harmonic)

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
156.2540	H	1.60	9.02	14.5	25.1	43.5	-18.4
228.4200	H	2.11	10.58	14.6	27.3	46.0	-18.7
323.5000	H	2.78	14.58	14.7	32.1	46.0	-13.9
384.9200	H	3.17	15.86	13.6	32.6	46.0	-13.4
408.1000	H	3.09	16.30	15.3	34.7	46.0	-11.3
420.4600	H	3.05	16.46	15.5	35.0	46.0	-11.0
134.2540	V	1.63	10.77	15.2	27.6	43.5	-15.9
157.4000	V	1.63	8.82	15.4	25.8	43.5	-17.7
227.5000	V	2.12	10.53	14.8	27.5	46.0	-18.5
323.8200	V	2.78	14.58	14.4	31.8	46.0	-14.2
408.1200	V	3.09	16.30	14.1	33.5	46.0	-12.5
504.1600	V	3.52	17.57	12.1	33.2	46.0	-12.8

NOTE :

1. Measurement uncertainty is less than +/- 2dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. (F) : Fundamental frequency of transmitter.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:17 of 22 Date:Apr. 25, 2005
---	----------------------	--

Temperature:	27°C	Humidity:	55 %RH
Frequency Range:	88 - 108 MHz	Measured Distance:	3m
Receiver Detector:	AV.	Tested Mode:	TX (Fundamental)
Tested Date:	Apr. 19, 2005		Frequency)
Tested By:	Hugo Yeh		107.3MHz

Fundamental frequency of transmitter

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
107.303(F)	H	1.56	7.46	32.3	41.3	67.96	-26.6
107.302(F)	V	1.56	7.46	32.2	41.2	67.96	-26.7

Receiver Detector: Q.P. Tested Mode: TX (Harmonic)

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
143.2540	H	1.72	11.69	14.5	27.9	43.5	-15.6
228.4200	H	2.11	10.58	13.6	26.3	46.0	-19.7
323.5000	H	2.78	14.58	13.7	31.1	46.0	-14.9
384.9200	H	3.17	15.86	13.6	32.6	46.0	-13.4
408.1200	H	3.09	16.30	14.4	33.8	46.0	-12.2
419.4600	H	3.06	16.45	13.6	33.1	46.0	-12.9
85.2540	V	1.24	7.20	16.8	25.2	40.0	-14.8
157.4230	V	1.63	8.82	15.4	25.8	43.5	-17.7
169.5000	V	2.02	8.70	16.8	27.5	43.5	-16.0
191.8200	V	2.02	9.36	17.4	28.8	43.5	-14.7
323.1200	V	2.78	14.58	17.3	34.7	46.0	-11.3
408.1600	V	3.09	16.30	12.1	31.5	46.0	-14.5

NOTE :

1. Measurement uncertainty is less than +/- 2dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. (F) : Fundamental frequency of transmitter.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A05040605 Report No.:FCCA05040605 FCC ID:TEVMD4EA940725 Page:18 of 22 Date:Apr. 25, 2005
---	----------------------	--

6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15, Subpart C Section 15.249. The minimum 20 dB bandwidth shall be at least 200 kHz.


6.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

6.3 TEST SET-UP

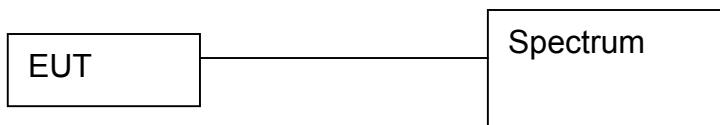

The EUT was connected to a spectrum through a 50Ω RF cable.

6.4 TEST PROCEDURE

The EUT was operating in the transmitter mode and could control its channels. The test result was printed by the hard copy function of the spectrum.

6.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.


TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:19 of 22
Date:Apr. 25, 2005

6.6 TEST RESULT

Temperature:	23°C	Humidity:	60%RH
Spectrum Detector:	PK.	Tested Mode:	107.3MHz
Tested By:	Hugo Yeh		
Tested Date:	Apr. 25, 2005		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	20dB DOWN BW (KHz)
1	107.3	52

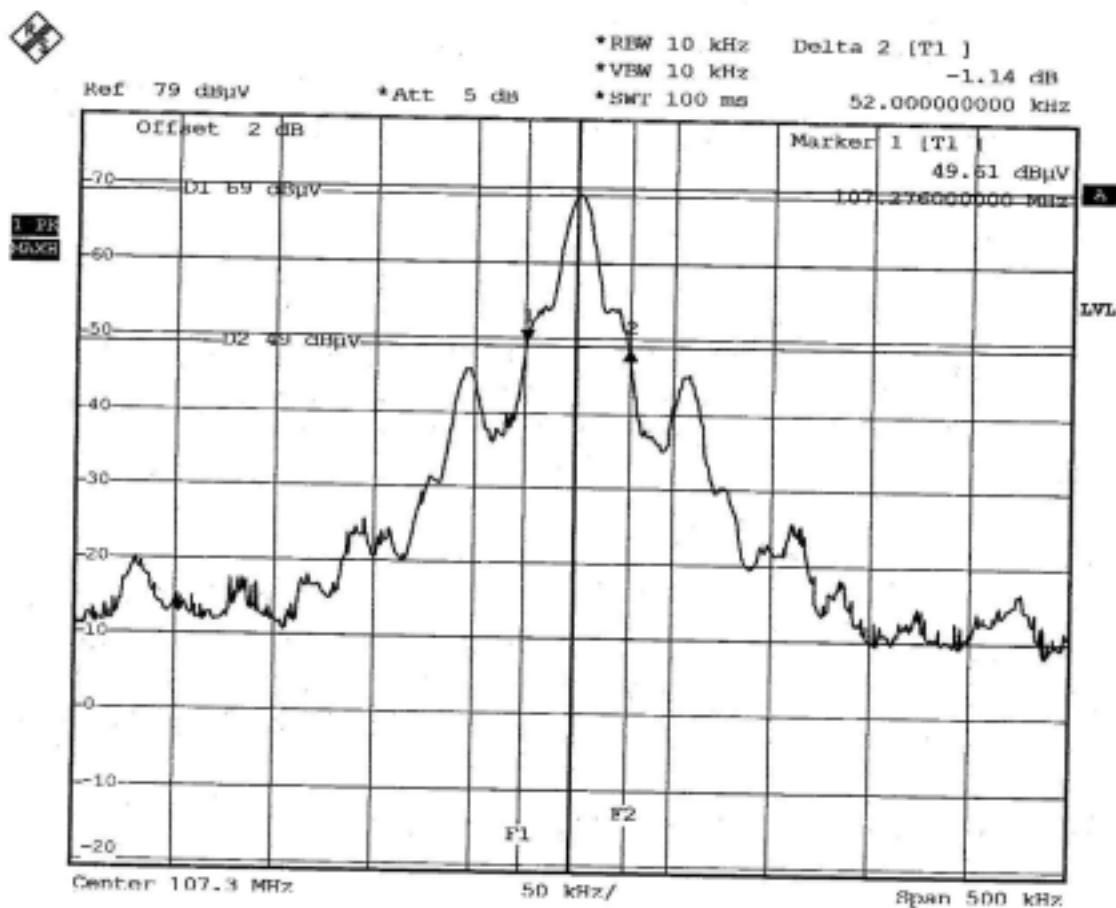




**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:20 of 22
Date:Apr. 25, 2005

7. PHOTOS OF TESTING

- Conducted test

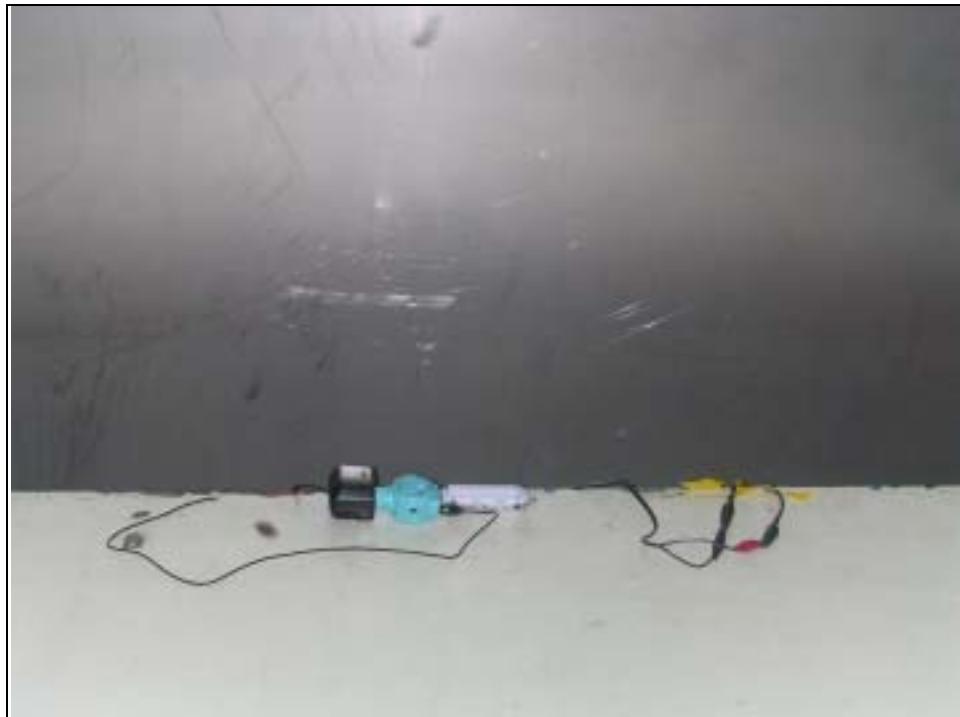




**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:21 of 22
Date:Apr. 25, 2005

- Radiated test

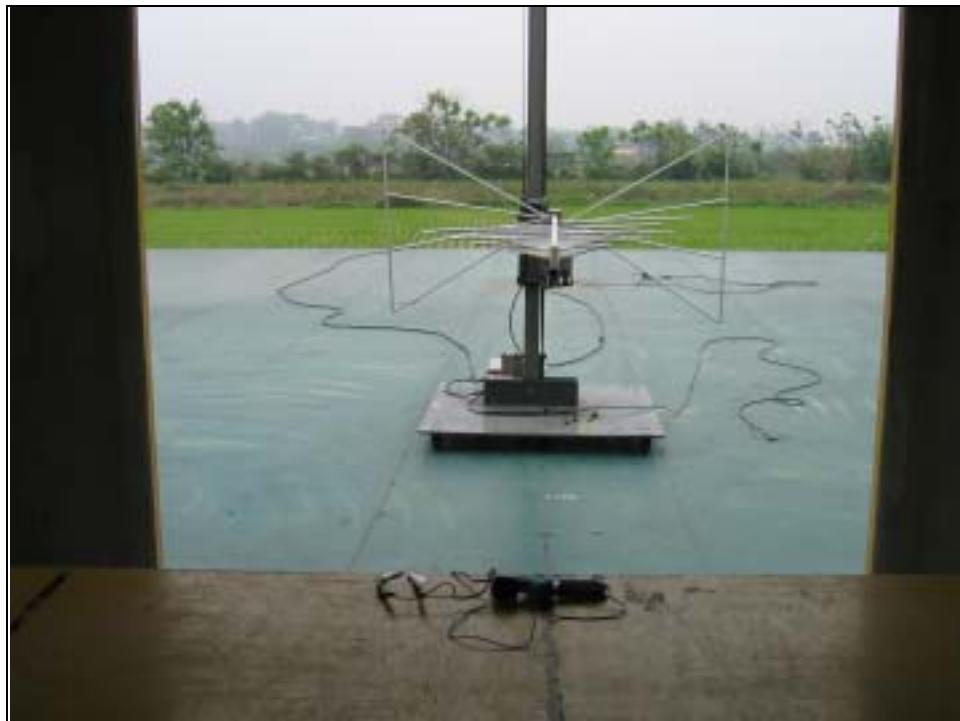



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A05040605
Report No.:FCCA05040605
FCC ID:TEVMD4EA940725
Page:22 of 22
Date:Apr. 25, 2005

8. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction