

FCC TEST REPORT

REPORT NO.: RF941020H04

MODEL NO.: AW-GM120

RECEIVED: Oct. 20, 2005

TESTED: Oct. 24 to Nov. 12, 2005

ISSUED: Nov. 16, 2005

APPLICANT: AzureWave Technologies, Inc.

ADDRESS: 8F, No.94, Baozhong Rd., Xindian, Taipei , Taiwan 231

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 93 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0536
MRA



No. 2177-01
ILAC

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	8
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.5	DESCRIPTION OF SUPPORT UNITS	10
3.6	CONFIGURATION OF SYSTEM UNDER TEST	10
4	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	TEST SETUP	12
4.1.5	EUT OPERATING CONDITIONS	13
4.1.6	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	16
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.2.2	TEST INSTRUMENTS	17
4.2.3	TEST PROCEDURES	18
4.2.4	TEST SETUP	19
4.2.5	EUT OPERATING CONDITIONS	19
4.2.6	TEST RESULTS (ANTENNA 1)	20
4.2.7	TEST RESULTS (ANTENNA 2)	27
4.3	6dB BANDWIDTH MEASUREMENT	34
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	34
4.3.2	TEST INSTRUMENTS	34
4.3.3	TEST PROCEDURE	35
4.3.4	TEST SETUP	35
4.3.5	EUT OPERATING CONDITIONS	35
4.3.6	TEST RESULTS (ANTENNA 1)	36
4.3.7	TEST RESULTS (ANTENNA 2)	42
4.4	MAXIMUM PEAK OUTPUT POWER	48
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	48
4.4.2	TEST INSTRUMENTS	48
4.4.3	TEST PROCEDURES	49
4.4.4	TEST SETUP	49
4.4.5	EUT OPERATING CONDITIONS	49



4.4.6	TEST RESULTS (ANTENNA 1).....	50
4.4.7	TEST RESULTS (ANTENNA 2).....	52
4.5	POWER SPECTRAL DENSITY MEASUREMENT	54
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	54
4.5.2	TEST INSTRUMENTS.....	54
4.5.3	TEST PROCEDURE.....	55
4.5.4	TEST SETUP	55
4.5.5	EUT OPERATING CONDITIONS	55
4.5.6	TEST RESULTS (ANTENNA 1).....	56
4.5.7	TEST RESULTS (ANTENNA 2).....	62
4.6	BAND EDGES MEASUREMENT	68
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	68
4.6.2	TEST INSTRUMENTS.....	68
4.6.3	TEST PROCEDURE.....	68
4.6.4	EUT OPERATING CONDITION.....	68
4.6.5	TEST RESULTS (ANTENNA 1).....	69
4.6.6	TEST RESULTS (ANTENNA 2).....	77
4.7	ANTENNA REQUIREMENT	85
4.7.1	STANDARD APPLICABLE	85
4.7.2	ANTENNA CONNECTED CONSTRUCTION	85
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	86
6	INFORMATION ON THE TESTING LABORATORIES	92
	APPENDIX-A	A-1



1 CERTIFICATION

PRODUCT : Wireless Digital Media Adapter Module
BRAND NAME : AzureWave
MODEL NO. : AW-GM120
TESTED: Oct. 24 to Nov. 12, 2005
APPLICANT : AzureWave Technologies, Inc.
TEST ITEM: MASS-PRODUCTION
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: AW-GM120) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Nov. 16, 2005
(Carol Liao)

TECHNICAL
ACCEPTANCE : Hank Chung , **DATE:** Nov. 16, 2005
Responsible for RF (Hank Chung)

APPROVED BY : May Chen , **DATE:** Nov. 16, 2005
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -7.25 dB at 0.349 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.30 dB at 2390.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Digital Media Adapter Module
MODEL NO.	AW-GM120
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b : 17.59 dBm 802.11g : 17.41 dBm
ANTENNA TYPE	Please see note 1
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There are two antennas provided to this EUT, please refer to the following table:

No.	Gain (dBi)	Antenna Type	Antenna Connector
1	3.0	PIFA	I-PEX
2	1.5	1/2 λ Dipole	MHF

2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g standards, and backwards compatible with IEEE 802.11b products.
4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	X	X	X	X	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

**Bandedge Measurement:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless Digital Media Adapter Module. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	Notebook Computer	DELL	PP01L	TW-0791UH-12800-0CK-3735	FCC DoC
2	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
3	MODEM	ACEEX	1414	0206026779	IFAXDM1414
4	Extended Card	ADT	NA	ADT-RF-003	NA

No.	Signal cable description
1	NA
2	1.1 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.1 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

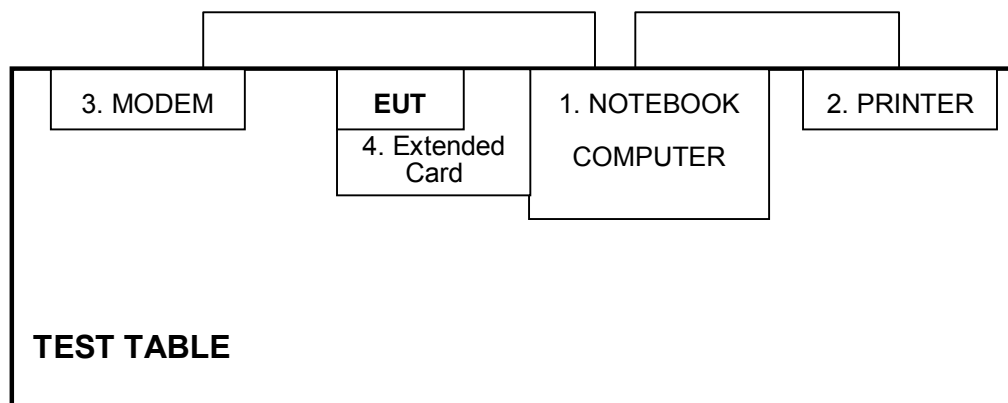

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Sep. 19, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
ROHDE & SCHWARZ LISN	ESH3-Z5	848773/004	Oct. 24, 2006
RF Signal Cable	RG233	COBCAB9K-30MHz	Dec. 10, 2005
Impedance-stabilization-network	ENY 41	838119/024	Jan. 09, 2006
Impedance-stabilization-network	ENY 22	837497/019	Jan. 09, 2006
Current Probe	SMZ11	18001	Jul. 13, 2006
Current Probe	SMZ11	18013	Jul. 13, 2006

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. B.
 3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

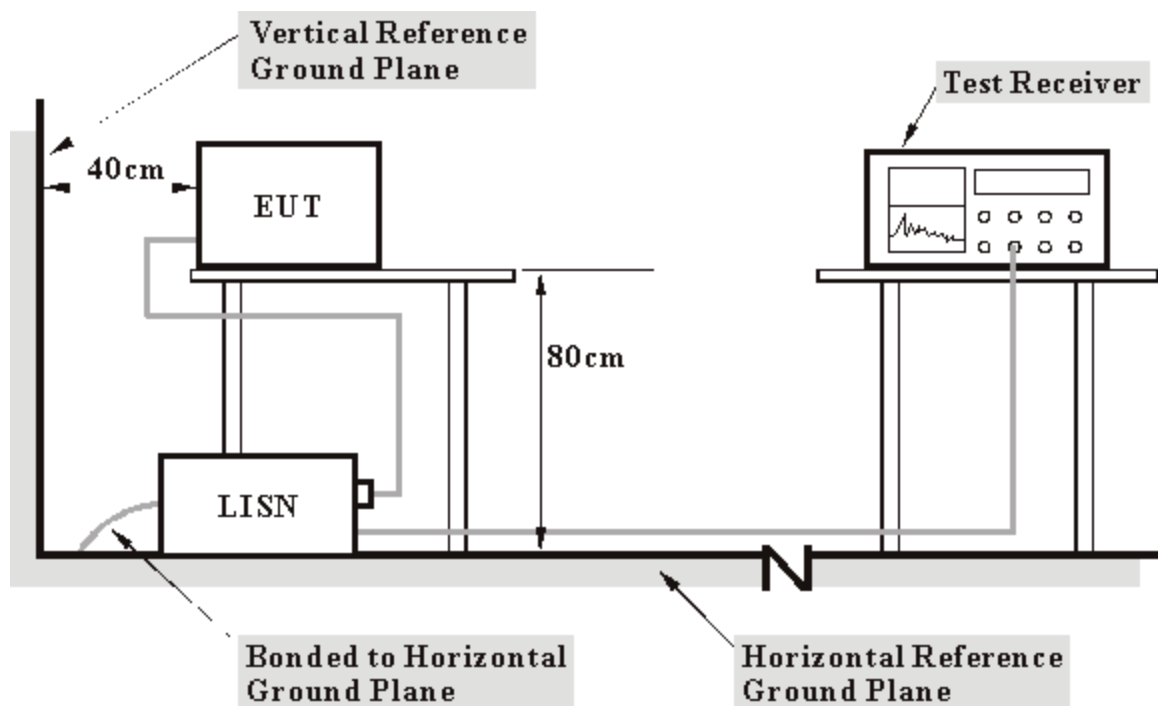

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS


- a. Connected the EUT with extended card to the support unit 1 (Notebook computer) and placed it on the testing table.
- b. Plug the EUT into the support unit 1 (Notebook computer) and placed it on the testing table.
- c. The support unit 1 (Notebook computer) ran a test program "ART V53 build5" to enable EUT under transmission condition continuously at specific channel frequency.
- d. Notebook computer sends "H" messages to modem.
- e. Notebook computer sends "H" messages to printer, and the printer prints them on paper.

4.1.6 TEST RESULTS

EUT	Wireless Digital Media Adapter Module		
MODE	Channel 11	MODEL	AW-GM120
INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 61 %RH, 968 hPa	PHASE	Line (L)
TESTED BY	Roger Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.262	9.21	38.68	-	47.89	-	61.37	51.37	-13.49	-
2	0.349	9.20	40.75	32.53	49.95	41.73	58.98	48.98	-9.03	-7.25
3	0.439	9.19	36.86	-	46.05	-	57.08	47.08	-11.03	-
4	0.691	9.20	37.45	29.42	46.65	38.62	56.00	46.00	-9.35	-7.38
5	0.946	9.23	37.57	26.49	46.80	35.72	56.00	46.00	-9.20	-10.28
6	10.500	9.56	26.08	-	35.64	-	60.00	50.00	-24.36	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

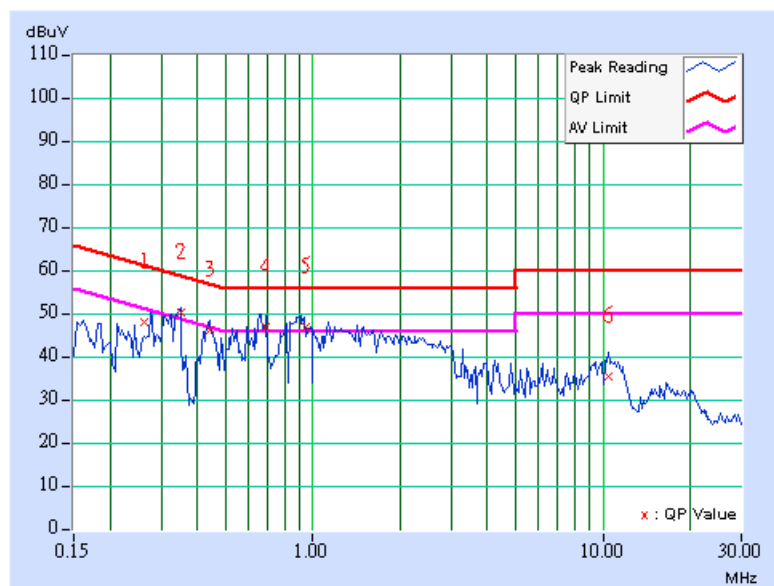

EUT	Wireless Digital Media Adapter Module		
MODE	Channel 11	MODEL	AW-GM120
INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	26 deg. C, 61 %RH, 968 hPa	PHASE	Neutral (N)
TESTED BY	Roger Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	9.19	38.88	-	48.07	-	64.61	54.61	-16.54	-
2	0.267	9.20	37.46	-	46.66	-	61.20	51.20	-14.54	-
3	0.349	9.22	40.05	31.25	49.27	40.47	58.98	48.98	-9.71	-8.51
4	0.658	9.21	36.92	19.39	46.13	28.60	56.00	46.00	-9.87	-17.40
5	0.943	9.21	37.42	25.33	46.63	34.54	56.00	46.00	-9.37	-11.46
6	11.051	9.59	25.88	-	35.47	-	60.00	50.00	-24.53	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

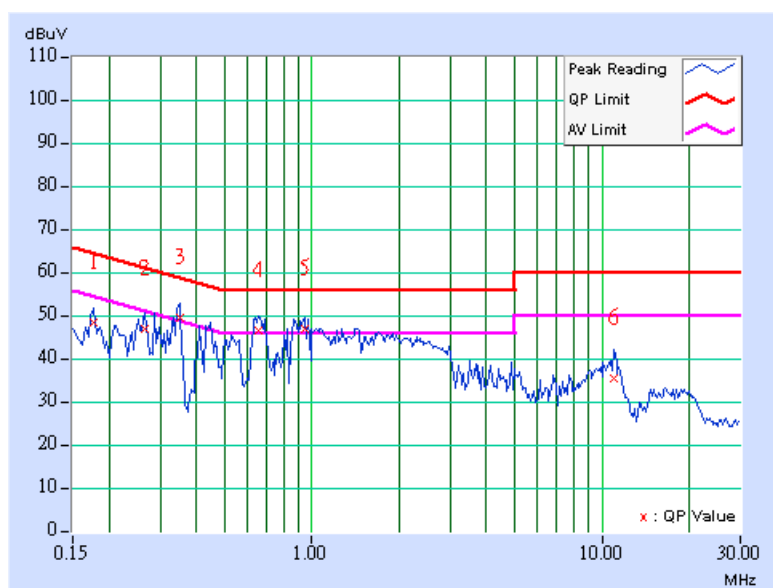

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 07, 2006
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2005
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2005
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 11, 2005
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 30, 2006
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 15, 2005
RF Cable(RICHTEC)	9913-30M	STCCAB-30M-1GHz-021	Jul. 16, 2006
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

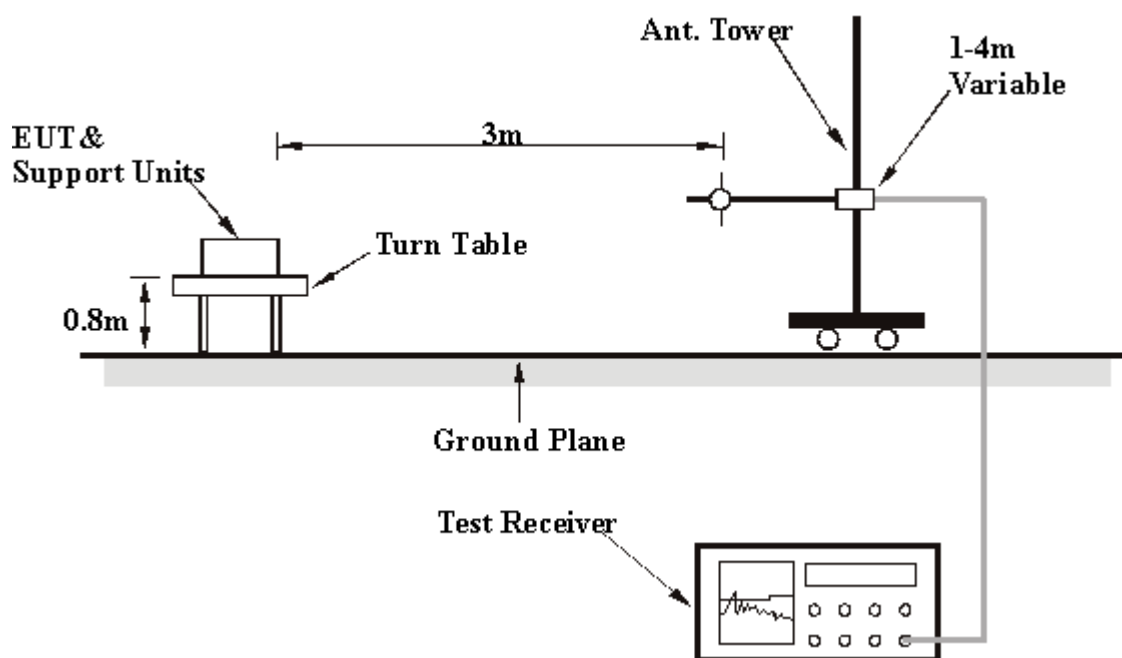

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS (ANTENNA 1)

Below 1GHz Worst-Case Data

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 65%RH, 968 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.33	36.70 QP	43.50	-6.80	2.26 H	355	24.20	12.50
2	166.59	35.30 QP	43.50	-8.20	2.02 H	339	21.90	13.40
3	200.08	28.30 QP	43.50	-15.20	1.89 H	334	17.10	11.20
4	240.02	26.80 QP	46.00	-19.20	1.27 H	22	13.90	12.90
5	300.10	33.60 QP	46.00	-12.40	1.00 H	296	17.30	16.30
6	433.33	30.40 QP	46.00	-15.60	1.45 H	318	11.20	19.30
7	566.66	29.50 QP	46.00	-16.50	1.70 H	358	6.80	22.70
8	899.81	28.40 QP	46.00	-17.60	1.34 H	108	0.50	27.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.47	31.20 QP	43.50	-12.30	1.00 V	287	18.60	12.60
2	166.65	24.80 QP	43.50	-18.70	1.00 V	314	11.40	13.40
3	240.01	23.90 QP	46.00	-22.10	1.00 V	91	11.00	12.90
4	300.00	28.90 QP	46.00	-17.10	1.00 V	112	12.60	16.30
5	366.67	28.20 QP	46.00	-17.80	1.00 V	78	10.80	17.30
6	433.33	25.50 QP	46.00	-20.50	1.00 V	326	6.20	19.30
7	566.65	28.80 QP	46.00	-17.20	1.00 V	99	6.10	22.70
8	899.98	30.40 QP	46.00	-15.60	1.26 V	322	2.60	27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS modulation

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	35.90 PK	74.00	-38.10	1.10 H	231	8.50	27.40
1	1608.00	27.10 AV	54.00	-26.90	1.10 H	231	-0.30	27.40
2	2390.00	53.80 PK	74.00	-20.20	1.13 H	14	20.10	33.70
2	2390.00	42.50 AV	54.00	-11.50	1.13 H	14	8.80	33.70
3	*2412.00	106.40 PK			1.13 H	14	76.60	29.80
3	*2412.00	99.80 AV			1.13 H	14	70.00	29.80
4	4824.00	52.40 PK	74.00	-21.60	1.22 H	43	17.30	35.10
4	4824.00	40.60 AV	54.00	-13.40	1.22 H	43	5.50	35.10
5	7236.00	45.30 PK	74.00	-28.70	1.61 H	38	4.80	40.50
5	7236.00	34.40 AV	54.00	-19.60	1.61 H	38	-6.10	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	38.50 PK	74.00	-35.50	1.02 V	178	11.10	27.40
1	1608.00	33.10 AV	54.00	-20.90	1.02 V	178	5.70	27.40
2	2390.00	57.80 PK	74.00	-16.20	1.67 V	127	24.10	33.70
2	2390.00	46.00 AV	54.00	-8.00	1.67 V	127	12.30	33.70
3	*2412.00	110.40 PK			1.67 V	127	80.60	29.80
3	*2412.00	103.30 AV			1.67 V	127	73.50	29.80
4	4824.00	62.40 PK	74.00	-11.60	1.54 V	159	27.30	35.10
4	4824.00	50.60 AV	54.00	-3.40	1.54 V	159	15.50	35.10
5	7236.00	49.40 PK	74.00	-24.60	1.67 V	169	8.90	40.50
5	7236.00	40.30 AV	54.00	-13.70	1.67 V	169	-0.20	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	36.30 PK	74.00	-37.70	1.14 H	238	8.90	27.40
1	1624.60	27.30 AV	54.00	-26.70	1.14 H	238	-0.10	27.40
2	*2437.00	103.40 PK			1.09 H	20	73.50	29.90
2	*2437.00	96.60 AV			1.09 H	20	66.70	29.90
3	4874.00	54.60 PK	74.00	-19.40	1.23 H	39	19.30	35.30
3	4874.00	43.50 AV	54.00	-10.50	1.23 H	39	8.20	35.30
4	7311.00	45.30 PK	74.00	-28.70	1.58 H	54	4.70	40.70
4	7311.00	34.60 AV	54.00	-19.40	1.58 H	54	-6.00	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	39.20 PK	74.00	-34.80	1.05 V	182	11.80	27.40
1	1624.60	33.60 AV	54.00	-20.40	1.05 V	182	6.20	27.40
2	*2437.00	109.10 PK			1.00 V	58	79.20	29.90
2	*2437.00	102.20 AV			1.00 V	58	72.30	29.90
3	4874.00	62.00 PK	74.00	-12.00	1.24 V	16	26.70	35.30
3	4874.00	50.50 AV	54.00	-3.50	1.24 V	16	15.20	35.30
4	7311.00	47.10 PK	74.00	-26.90	1.26 V	43	6.50	40.70
4	7311.00	36.40 AV	54.00	-17.60	1.26 V	43	-4.20	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	36.60 PK	74.00	-37.40	1.12 H	225	9.10	27.40
1	1641.00	27.50 AV	54.00	-26.50	1.12 H	225	0.00	27.40
2	*2462.00	102.90 PK			1.11 H	8	72.90	30.00
2	*2462.00	96.20 AV			1.11 H	8	66.20	30.00
3	2483.50	52.10 PK	74.00	-21.90	1.11 H	8	22.00	30.10
3	2483.50	40.60 AV	54.00	-13.40	1.11 H	8	10.50	30.10
4	4924.00	55.40 PK	74.00	-18.60	1.28 H	351	19.90	35.50
4	4924.00	43.40 AV	54.00	-10.60	1.28 H	351	7.90	35.50
5	7386.00	45.50 PK	74.00	-28.50	1.59 H	41	4.70	40.80
5	7386.00	34.60 AV	54.00	-19.40	1.59 H	41	-6.20	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	39.70 PK	74.00	-34.30	1.03 V	170	12.20	27.40
1	1641.00	33.90 AV	54.00	-20.10	1.03 V	170	6.40	27.40
2	*2462.00	108.70 PK			1.67 V	124	78.70	30.00
2	*2462.00	101.70 AV			1.67 V	124	71.70	30.00
3	2483.50	57.90 PK	74.00	-16.10	1.67 V	124	27.80	30.10
3	2483.50	46.10 AV	54.00	-7.90	1.67 V	124	16.00	30.10
4	4924.00	63.60 PK	74.00	-10.40	1.59 V	154	28.00	35.50
4	4924.00	51.90 AV	54.00	-2.10	1.59 V	154	16.40	35.50
5	7386.00	51.40 PK	74.00	-22.60	1.83 V	103	10.50	40.80
5	7386.00	41.50 AV	54.00	-12.50	1.83 V	103	0.70	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

802.11g OFDM modulation

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	35.20 PK	74.00	-38.80	1.10 H	235	7.80	27.40
1	1608.00	28.70 AV	54.00	-25.30	1.10 H	235	1.30	27.40
2	2390.00	59.80 PK	74.00	-14.20	1.06 H	213	26.10	33.70
2	2390.00	46.00 AV	54.00	-8.00	1.06 H	213	12.30	33.70
3	*2412.00	102.20 PK			1.06 H	213	72.40	29.80
3	*2412.00	93.90 AV			1.06 H	213	64.10	29.80
4	4824.00	53.30 PK	74.00	-20.70	1.23 H	40	18.20	35.10
4	4824.00	38.20 AV	54.00	-15.80	1.23 H	40	3.10	35.10
5	7236.00	47.40 PK	74.00	-26.60	1.26 H	334	6.90	40.50
5	7236.00	35.50 AV	54.00	-18.50	1.26 H	334	-5.00	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	39.50 PK	74.00	-34.50	1.00 V	176	12.10	27.40
1	1608.00	36.60 AV	54.00	-17.40	1.00 V	176	9.20	27.40
2	2390.00	64.00 PK	74.00	-10.00	1.05 V	59	30.30	33.70
2	2390.00	49.40 AV	54.00	-4.60	1.05 V	59	15.70	33.70
3	*2412.00	106.40 PK			1.05 V	59	76.60	29.80
3	*2412.00	97.30 AV			1.05 V	59	67.50	29.80
4	4824.00	61.50 PK	74.00	-12.50	1.10 V	13	26.40	35.10
4	4824.00	44.90 AV	54.00	-9.10	1.10 V	13	9.80	35.10
5	7236.00	48.10 PK	74.00	-25.90	1.20 V	270	7.60	40.50
5	7236.00	35.90 AV	54.00	-18.10	1.20 V	270	-4.60	40.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	35.50 PK	74.00	-38.50	1.09 H	232	8.10	27.40
1	1624.60	28.90 AV	54.00	-25.10	1.09 H	232	1.50	27.40
2	*2437.00	102.70 PK			1.09 H	42	72.80	29.90
2	*2437.00	94.30 AV			1.09 H	42	64.40	29.90
3	4874.00	57.40 PK	74.00	-16.60	1.26 H	66	22.10	35.30
3	4874.00	42.00 AV	54.00	-12.00	1.26 H	66	6.70	35.30
4	7311.00	50.20 PK	74.00	-23.80	1.26 H	3	9.60	40.70
4	7311.00	37.30 AV	54.00	-16.70	1.26 H	3	-3.30	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	39.30 PK	74.00	-34.70	1.00 V	180	11.90	27.40
1	1624.60	36.70 AV	54.00	-17.30	1.00 V	180	9.30	27.40
2	*2437.00	105.90 PK			1.00 V	57	76.00	29.90
2	*2437.00	96.60 AV			1.00 V	57	66.70	29.90
3	4874.00	66.40 PK	74.00	-7.60	1.65 V	162	31.10	35.30
3	4874.00	51.90 AV	54.00	-2.10	1.65 V	162	16.60	35.30
4	7311.00	53.50 PK	74.00	-20.50	1.87 V	244	12.90	40.70
4	7311.00	38.60 AV	54.00	-15.40	1.87 V	244	-2.00	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	35.10 PK	74.00	-38.90	1.12 H	233	7.60	27.40
1	1641.00	28.60 AV	54.00	-25.40	1.12 H	233	1.10	27.40
2	*2462.00	102.20 PK			1.06 H	43	72.20	30.00
2	*2462.00	93.70 AV			1.06 H	43	63.70	30.00
3	2483.50	62.00 PK	74.00	-12.00	1.06 H	43	31.90	30.10
3	2483.50	49.40 AV	54.00	-4.60	1.06 H	43	19.30	30.10
4	4924.00	52.60 PK	74.00	-21.40	1.35 H	38	17.10	35.50
4	4924.00	37.70 AV	54.00	-16.30	1.35 H	38	2.20	35.50
5	7386.00	48.10 PK	74.00	-25.90	1.36 H	21	7.30	40.80
5	7386.00	35.60 AV	54.00	-18.40	1.36 H	21	-5.20	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	39.30 PK	74.00	-34.70	1.01 V	173	11.80	27.40
1	1641.00	36.40 AV	54.00	-17.60	1.01 V	173	8.90	27.40
2	*2462.00	106.40 PK			1.10 V	172	76.40	30.00
2	*2462.00	96.60 AV			1.10 V	172	66.60	30.00
3	2483.50	56.60 PK	74.00	-17.40	1.10 V	172	26.50	30.10
3	2483.50	52.30 AV	54.00	-1.70	1.10 V	172	22.20	30.10
4	4924.00	61.50 PK	74.00	-12.50	1.24 V	15	26.00	35.50
4	4924.00	45.40 AV	54.00	-8.60	1.24 V	15	9.90	35.50
5	7386.00	49.10 PK	74.00	-24.90	1.37 V	42	8.30	40.80
5	7386.00	35.70 AV	54.00	-18.30	1.37 V	42	-5.10	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.2.7 TEST RESULTS (ANTENNA 2)

Below 1GHz Worst-Case Data

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 65%RH, 968 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.62	32.80 QP	43.50	-10.70	2.09 H	343	20.20	12.60
2	166.94	33.50 QP	43.50	-10.00	1.85 H	4	20.10	13.40
3	200.09	29.90 QP	43.50	-13.60	1.98 H	22	18.70	11.20
4	240.04	28.70 QP	46.00	-17.30	1.43 H	0	15.80	12.90
5	300.06	32.90 QP	46.00	-13.10	1.27 H	325	16.50	16.30
6	433.33	32.60 QP	46.00	-13.40	1.42 H	61	13.30	19.30
7	566.66	29.50 QP	46.00	-16.50	1.71 H	22	6.80	22.70
8	899.99	29.30 QP	46.00	-16.70	1.41 H	289	1.40	27.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.99	27.60 QP	43.50	-15.90	1.00 V	341	16.10	11.50
2	166.67	27.10 QP	43.50	-16.40	1.00 V	345	13.70	13.40
3	240.01	24.20 QP	46.00	-21.80	1.00 V	235	11.40	12.90
4	300.01	29.80 QP	46.00	-16.20	1.00 V	275	13.50	16.30
5	366.66	29.70 QP	46.00	-16.30	1.00 V	60	12.40	17.30
6	433.33	28.10 QP	46.00	-17.90	1.00 V	288	8.80	19.30
7	499.99	29.10 QP	46.00	-16.90	1.00 V	309	8.30	20.90
8	899.98	31.40 QP	46.00	-14.60	1.32 V	21	3.50	27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS modulation

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.50 PK	74.00	-33.50	1.21 H	318	13.10	27.40
1	1608.00	34.00 AV	54.00	-20.00	1.21 H	318	6.60	27.40
2	2390.00	51.00 PK	74.00	-23.00	1.47 H	243	17.30	33.70
2	2390.00	38.60 AV	54.00	-15.40	1.47 H	243	4.90	33.70
3	*2412.00	103.60 PK			1.47 H	243	73.80	29.80
3	*2412.00	95.90 AV			1.47 H	243	66.10	29.80
4	4824.00	51.90 PK	74.00	-22.10	1.74 H	46	16.80	35.10
4	4824.00	40.50 AV	54.00	-13.50	1.74 H	46	5.40	35.10
5	7236.00	49.10 PK	74.00	-24.90	1.10 H	7	8.60	40.50
5	7236.00	37.00 AV	54.00	-17.00	1.10 H	7	-3.50	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	44.10 PK	74.00	-29.90	1.00 V	307	16.70	27.40
1	1608.00	39.10 AV	54.00	-14.90	1.00 V	307	11.70	27.40
2	2390.00	60.40 PK	74.00	-13.60	1.24 V	347	26.70	33.70
2	2390.00	47.80 AV	54.00	-6.20	1.24 V	347	14.10	33.70
3	*2412.00	113.00 PK			1.24 V	347	83.20	29.80
3	*2412.00	105.10 AV			1.24 V	347	75.30	29.80
4	4824.00	52.00 PK	74.00	-22.00	1.22 V	286	16.90	35.10
4	4824.00	39.90 AV	54.00	-14.10	1.22 V	286	4.80	35.10
5	7236.00	51.90 PK	74.00	-22.10	1.09 V	25	11.40	40.50
5	7236.00	41.00 AV	54.00	-13.00	1.09 V	25	0.50	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	41.70 PK	74.00	-32.30	1.24 H	326	14.30	27.40
1	1624.60	35.40 AV	54.00	-18.60	1.24 H	326	8.00	27.40
2	*2437.00	103.00 PK			1.40 H	243	73.10	29.90
2	*2437.00	95.40 AV			1.40 H	243	65.50	29.90
3	4874.00	56.20 PK	74.00	-17.80	1.88 H	45	20.90	35.30
3	4874.00	44.00 AV	54.00	-10.00	1.88 H	45	8.70	35.30
4	7311.00	50.00 PK	74.00	-24.00	1.07 H	14	9.40	40.70
4	7311.00	37.80 AV	54.00	-16.20	1.07 H	14	-2.80	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	45.20 PK	74.00	-28.80	1.00 V	308	17.80	27.40
1	1624.60	41.70 AV	54.00	-12.30	1.00 V	308	14.30	27.40
2	*2437.00	112.40 PK			1.23 V	346	82.50	29.90
2	*2437.00	104.70 AV			1.23 V	346	74.80	29.90
3	4874.00	56.40 PK	74.00	-17.60	1.26 V	324	21.10	35.30
3	4874.00	44.10 AV	54.00	-9.90	1.26 V	324	8.80	35.30
4	7311.00	53.60 PK	74.00	-20.40	1.08 V	27	13.00	40.70
4	7311.00	41.90 AV	54.00	-12.10	1.08 V	27	1.30	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	42.00 PK	74.00	-32.00	1.17 H	321	14.50	27.40
1	1641.00	35.60 AV	54.00	-18.40	1.17 H	321	8.10	27.40
2	*2462.00	102.80 PK			1.35 H	243	72.80	30.00
2	*2462.00	95.20 AV			1.35 H	243	65.20	30.00
3	2483.50	52.00 PK	74.00	-22.00	1.35 H	243	21.90	30.10
3	2483.50	39.60 AV	54.00	-14.40	1.35 H	243	9.50	30.10
4	4924.00	55.20 PK	74.00	-18.80	1.89 H	37	19.70	35.50
4	4924.00	43.30 AV	54.00	-10.70	1.89 H	37	7.80	35.50
5	7386.00	50.50 PK	74.00	-23.50	1.12 H	23	9.70	40.80
5	7386.00	38.20 AV	54.00	-15.80	1.12 H	23	-2.60	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	45.80 PK	74.00	-28.20	1.00 V	314	18.30	27.40
1	1641.00	42.20 AV	54.00	-11.80	1.00 V	314	14.70	27.40
2	*2462.00	112.50 PK			1.21 V	346	82.50	30.00
2	*2462.00	104.60 AV			1.21 V	346	74.60	30.00
3	2483.50	61.70 PK	74.00	-12.30	1.21 V	346	31.60	30.10
3	2483.50	49.00 AV	54.00	-5.00	1.21 V	346	18.90	30.10
4	4924.00	60.80 PK	74.00	-13.20	1.06 V	333	25.30	35.50
4	4924.00	48.90 AV	54.00	-5.10	1.06 V	333	13.40	35.50
5	7386.00	52.80 PK	74.00	-21.20	1.08 V	29	12.00	40.80
5	7386.00	42.00 AV	54.00	-12.00	1.08 V	29	1.20	40.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

802.11g OFDM modulation

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.80 PK	74.00	-33.20	1.24 H	325	13.40	27.40
1	1608.00	34.20 AV	54.00	-19.80	1.24 H	325	6.80	27.40
2	2390.00	58.60 PK	74.00	-15.40	1.49 H	244	24.90	33.70
2	2390.00	43.80 AV	54.00	-10.20	1.49 H	244	10.10	33.70
3	*2412.00	101.00 PK			1.49 H	244	71.20	29.80
3	*2412.00	91.70 AV			1.49 H	244	61.90	29.80
4	4824.00	47.40 PK	74.00	-26.60	1.72 H	52	12.30	35.10
4	4824.00	38.30 AV	54.00	-15.70	1.72 H	52	3.20	35.10
5	7236.00	50.30 PK	74.00	-23.70	1.24 H	347	9.80	40.50
5	7236.00	36.50 AV	54.00	-17.50	1.24 H	347	-4.00	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	44.80 PK	74.00	-29.20	1.00 V	309	17.40	27.40
1	1608.00	41.10 AV	54.00	-12.90	1.00 V	309	13.70	27.40
2	2390.00	68.80 PK	74.00	-5.20	1.23 V	346	35.10	33.70
2	2390.00	52.70 AV	54.00	-1.30	1.23 V	346	19.00	33.70
3	*2412.00	111.20 PK			1.23 V	346	81.40	29.80
3	*2412.00	100.60 AV			1.23 V	346	70.80	29.80
4	4824.00	53.10 PK	74.00	-20.90	1.24 V	283	18.00	35.10
4	4824.00	37.60 AV	54.00	-16.40	1.24 V	283	2.50	35.10
5	7236.00	54.10 PK	74.00	-19.90	1.10 V	24	13.60	40.50
5	7236.00	38.20 AV	54.00	-15.80	1.10 V	24	-2.30	40.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	42.70 PK	74.00	-31.30	1.20 H	334	15.30	27.40
1	1624.60	36.20 AV	54.00	-17.80	1.20 H	334	8.80	27.40
2	*2437.00	99.60 PK			1.41 H	241	69.70	29.90
2	*2437.00	90.30 AV			1.41 H	241	60.40	29.90
3	4874.00	56.10 PK	74.00	-17.90	1.84 H	49	20.80	35.30
3	4874.00	39.00 AV	54.00	-15.00	1.84 H	49	3.70	35.30
4	7311.00	50.80 PK	74.00	-23.20	1.22 H	336	10.20	40.70
4	7311.00	37.00 AV	54.00	-17.00	1.22 H	336	-3.60	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	46.90 PK	74.00	-27.10	1.00 V	307	19.50	27.40
1	1624.60	43.80 AV	54.00	-10.20	1.00 V	307	16.40	27.40
2	*2437.00	109.60 PK			1.22 V	345	79.70	29.90
2	*2437.00	99.30 AV			1.22 V	345	69.40	29.90
3	4874.00	57.30 PK	74.00	-16.70	1.28 V	326	22.00	35.30
3	4874.00	39.80 AV	54.00	-14.20	1.28 V	326	4.50	35.30
4	7311.00	55.60 PK	74.00	-18.40	1.08 V	26	15.00	40.70
4	7311.00	39.00 AV	54.00	-15.00	1.08 V	26	-1.60	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	Wireless Digital Media Adapter Module	MODEL	AW-GM120
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 54%RH, 968 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	37.60 PK	74.00	-36.40	1.15 H	319	10.10	27.40
1	1641.00	30.80 AV	54.00	-23.20	1.15 H	319	3.30	27.40
2	*2462.00	99.00 PK			1.34 H	245	69.00	30.00
2	*2462.00	88.60 AV			1.34 H	245	58.60	30.00
3	2483.50	57.30 PK	74.00	-16.70	1.34 H	245	27.20	30.10
3	2483.50	41.70 AV	54.00	-12.30	1.34 H	245	11.60	30.10
4	4924.00	57.70 PK	74.00	-16.30	1.86 H	76	22.20	35.50
4	4924.00	39.60 AV	54.00	-14.40	1.86 H	76	4.10	35.50
5	7386.00	51.70 PK	74.00	-22.30	1.27 H	351	10.90	40.80
5	7386.00	37.50 AV	54.00	-16.50	1.27 H	351	-3.30	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	47.40 PK	74.00	-26.60	1.00 V	314	19.90	27.40
1	1641.00	44.40 AV	54.00	-9.60	1.00 V	314	16.90	27.40
2	*2462.00	108.60 PK			1.22 V	346	78.60	30.00
2	*2462.00	98.70 AV			1.22 V	346	68.70	30.00
3	2483.50	66.90 PK	74.00	-7.10	1.22 V	346	36.80	30.10
3	2483.50	51.80 AV	54.00	-2.20	1.22 V	346	21.70	30.10
4	4924.00	58.30 PK	74.00	-15.70	1.07 V	332	22.80	35.50
4	4924.00	39.80 AV	54.00	-14.20	1.07 V	332	4.30	35.50
5	7386.00	55.50 PK	74.00	-18.50	1.09 V	31	14.70	40.80
5	7386.00	39.00 AV	54.00	-15.00	1.09 V	31	-1.80	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.6 TEST RESULTS (ANTENNA 1)

802.11b DSSS modulation


EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.65	0.5	PASS
6	2437	11.40	0.5	PASS
11	2462	11.30	0.5	PASS


CH1

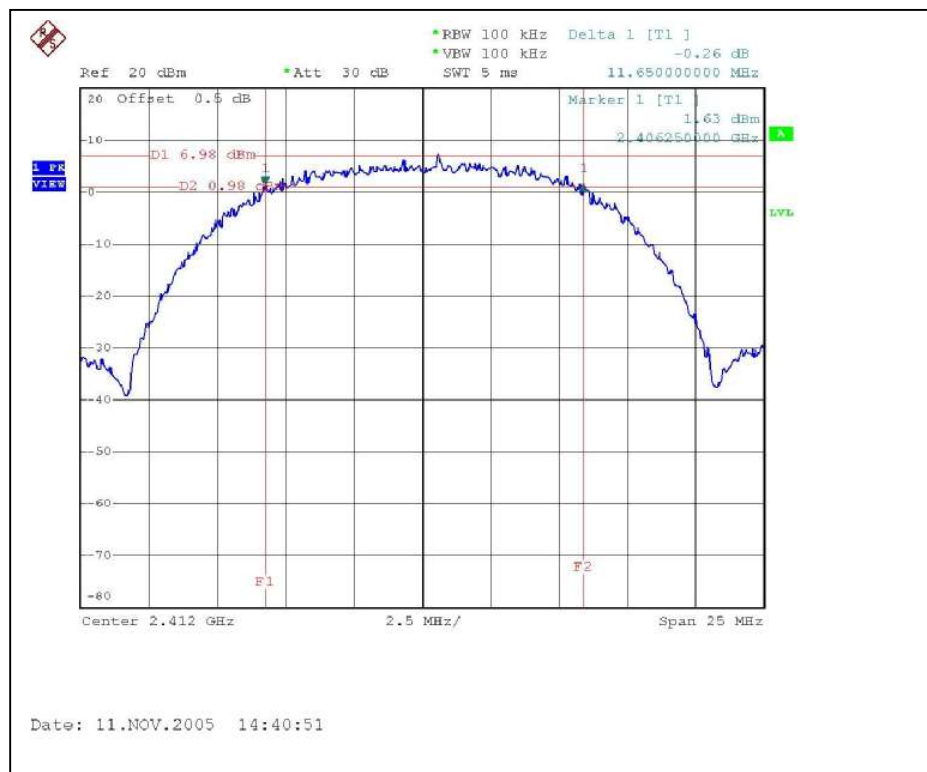

CH6

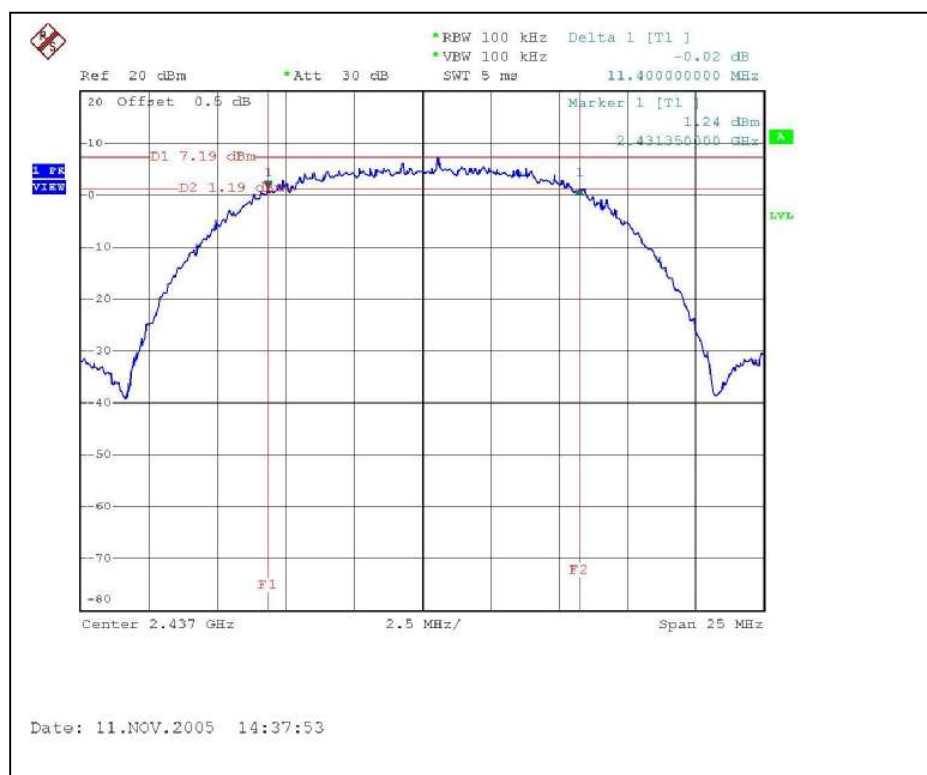

CH11

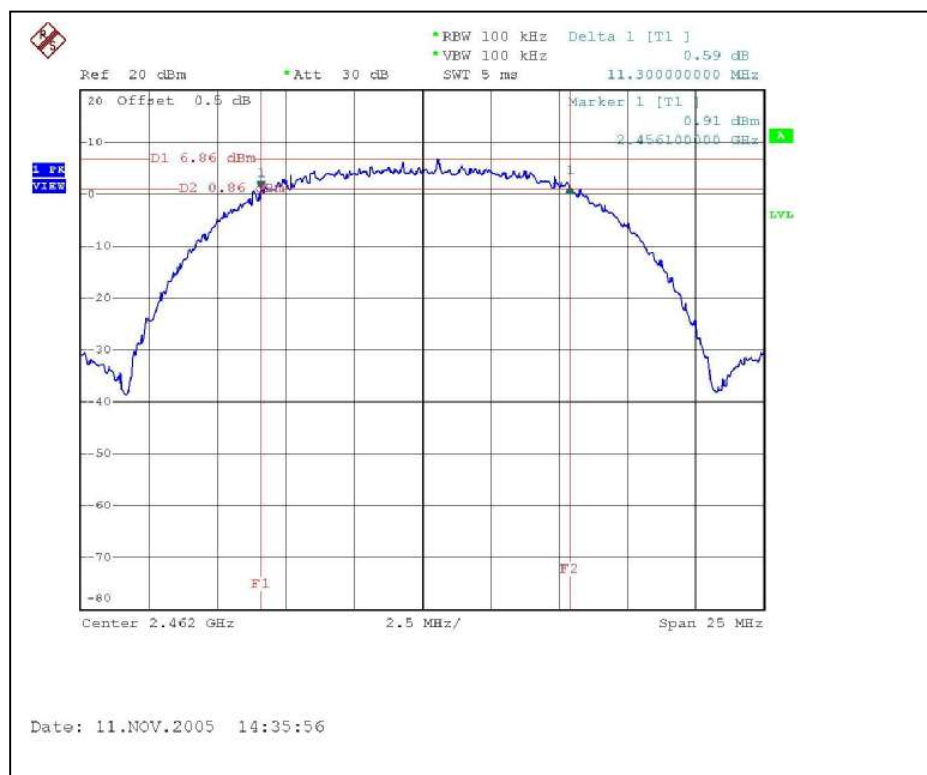


802.11g OFDM modulation


EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.35	0.5	PASS
6	2437	16.35	0.5	PASS
11	2462	16.35	0.5	PASS


CH1

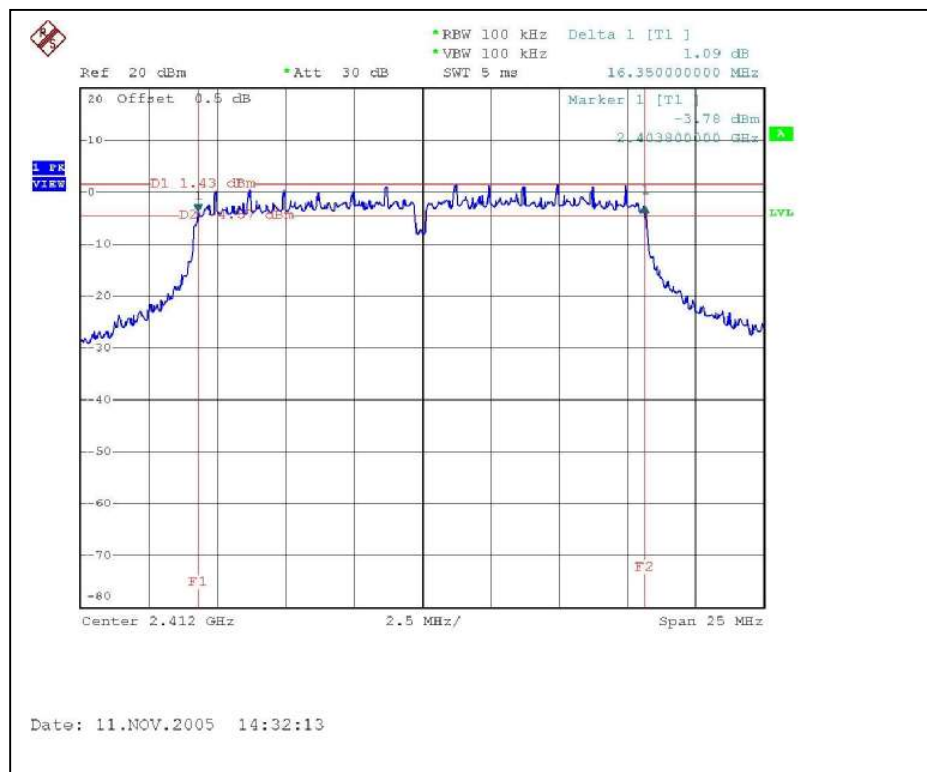

CH6

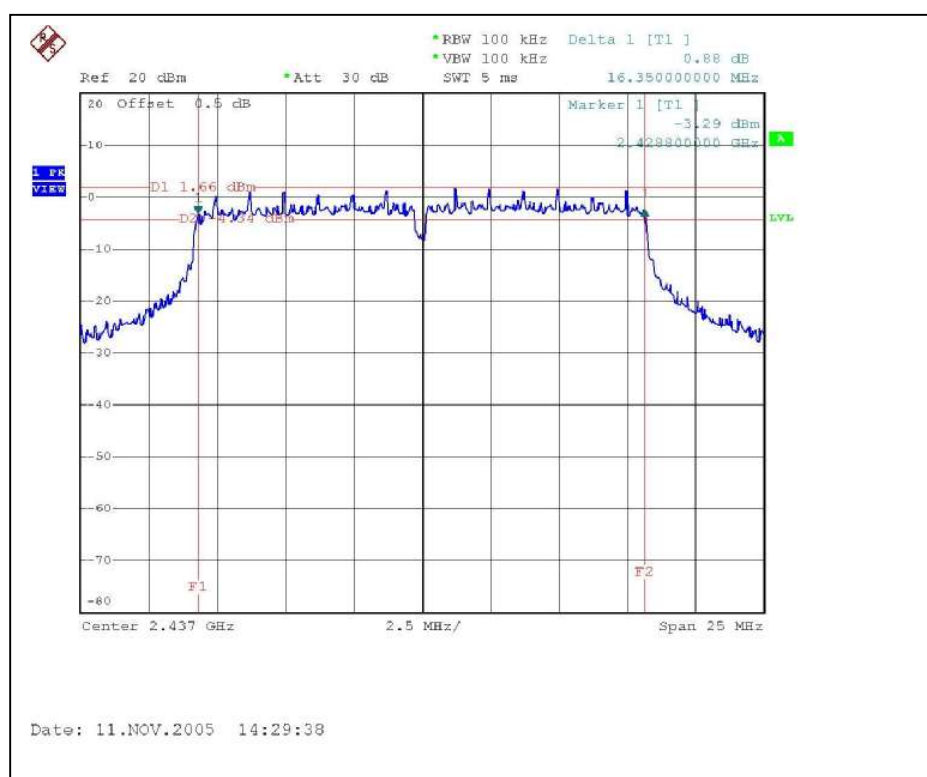

CH11

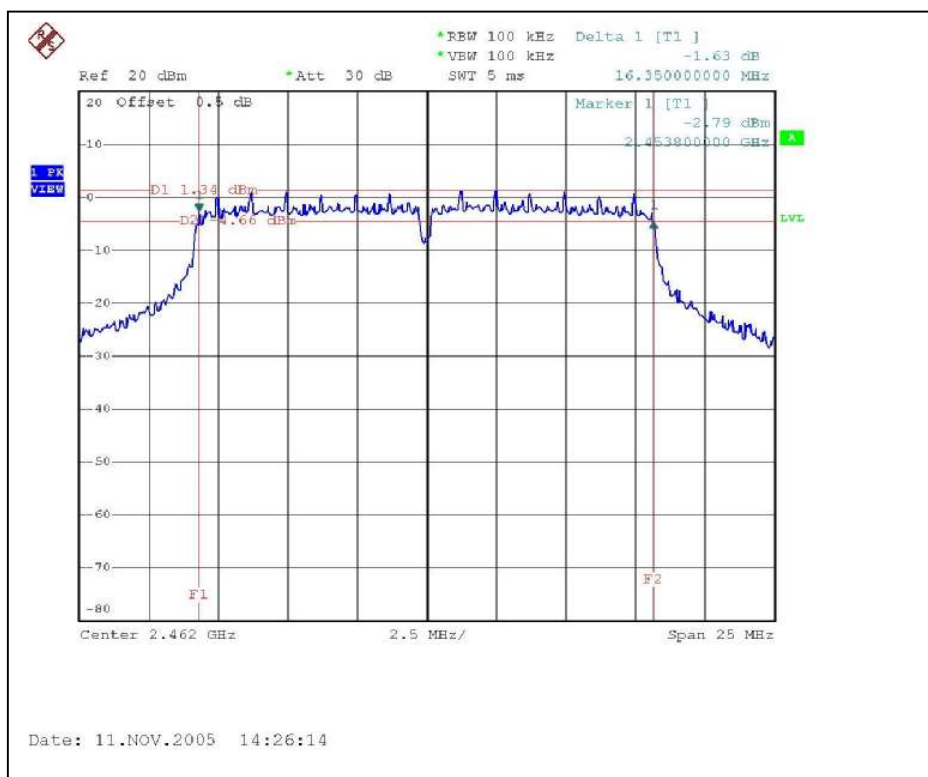


4.3.7 TEST RESULTS (ANTENNA 2)

802.11b DSSS modulation


EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.65	0.5	PASS
6	2437	11.40	0.5	PASS
11	2462	11.30	0.5	PASS


CH1

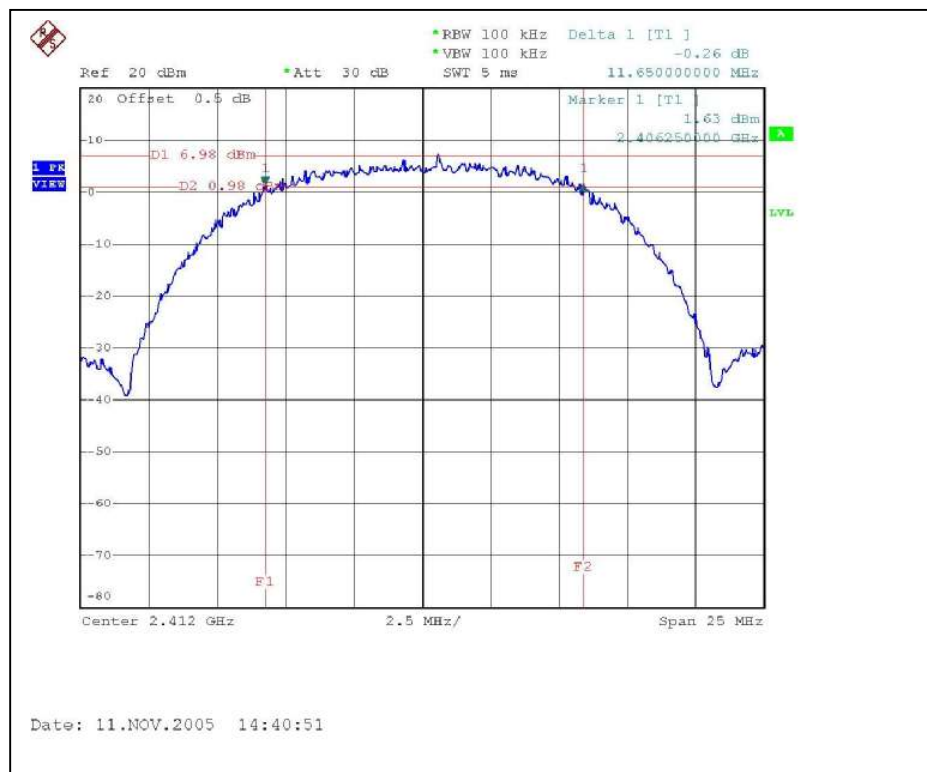

CH6

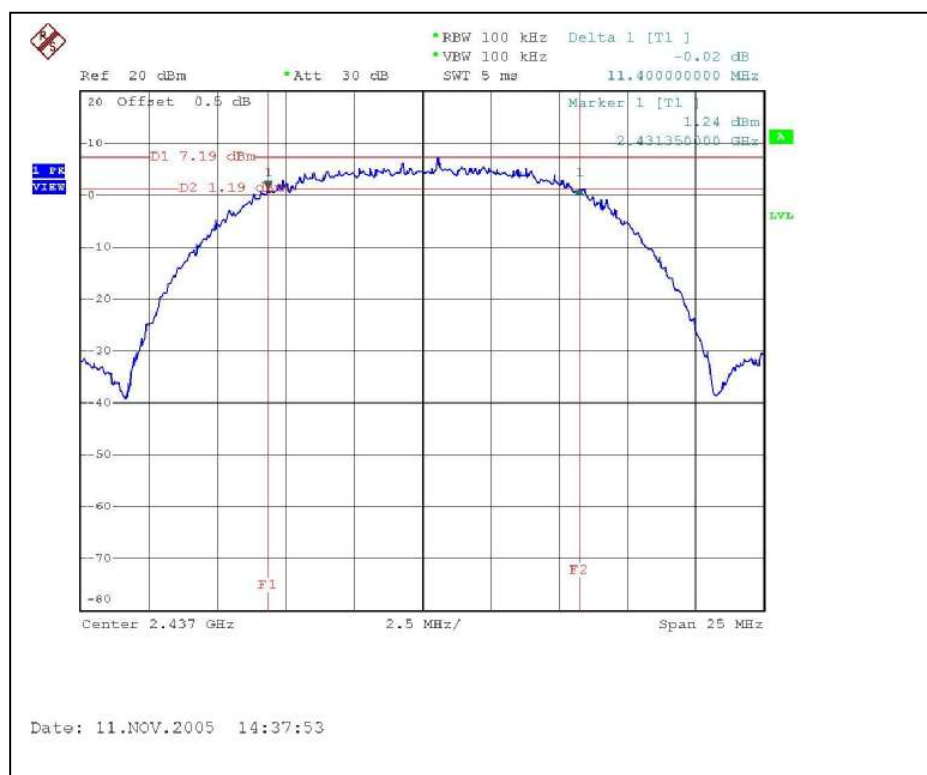

CH11

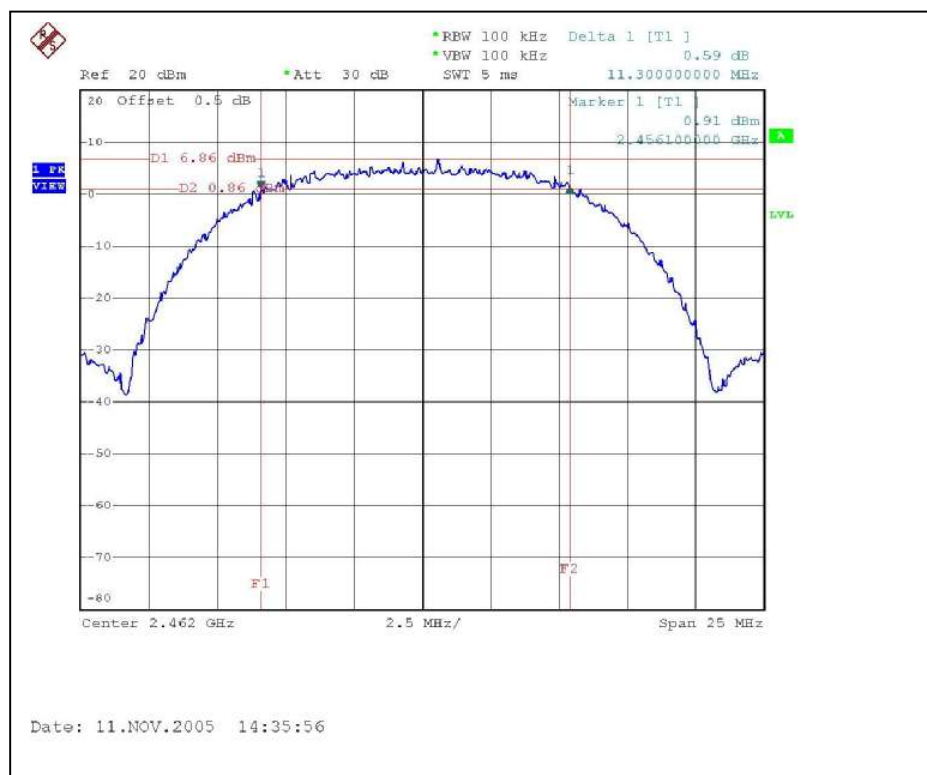


802.11g OFDM modulation


EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.35	0.5	PASS
6	2437	16.35	0.5	PASS
11	2462	16.35	0.5	PASS


CH1

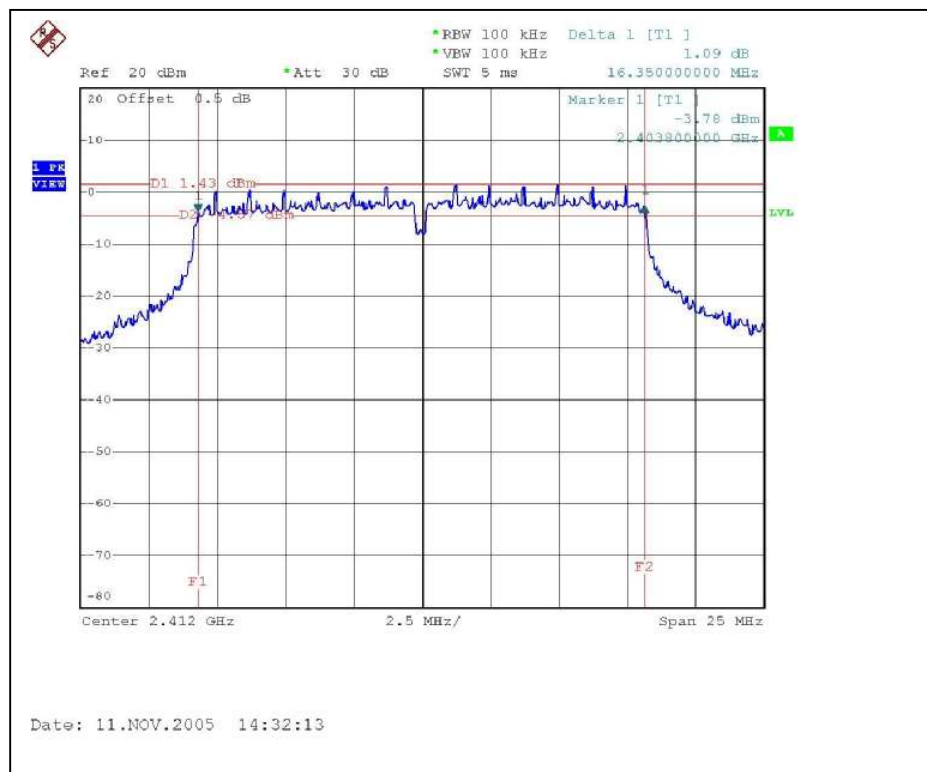

CH6

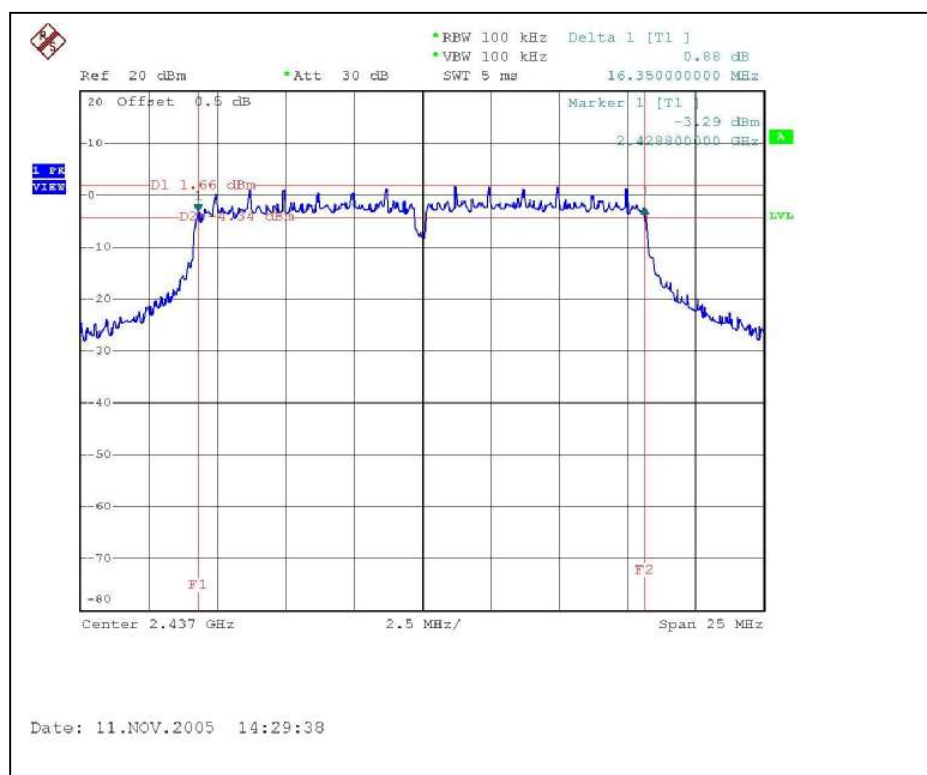

CH11

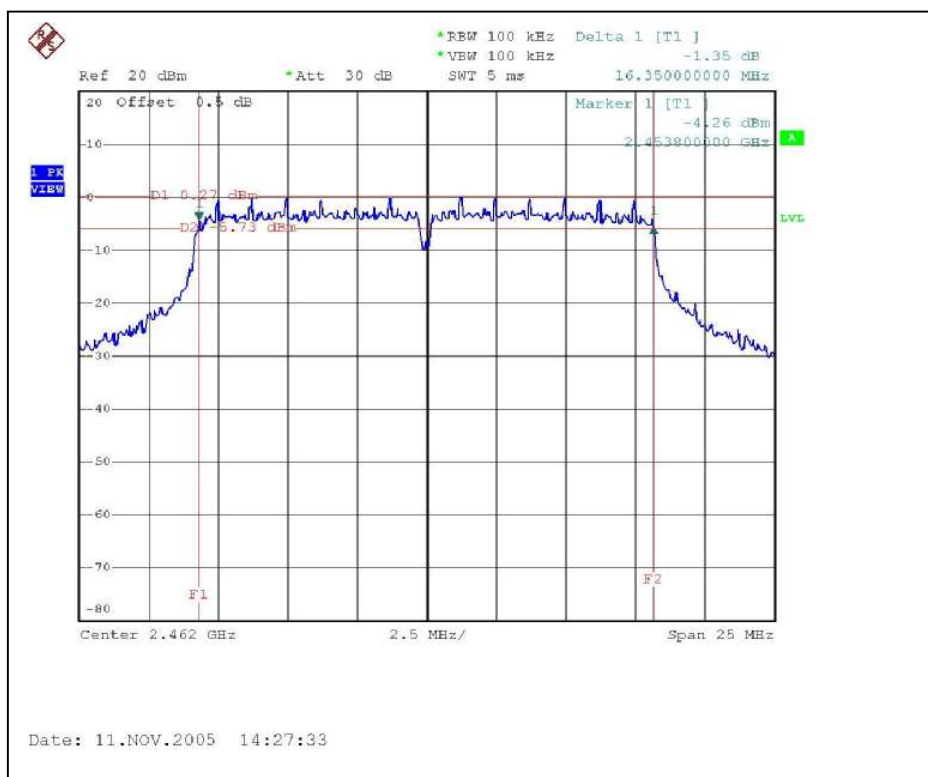

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2005
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jun. 22, 2006
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS (ANTENNA 1)

802.11b DSSS modulation

EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	57.41164622	17.59	30	PASS
6	2437	56.6239289	17.53	30	PASS
11	2462	57.01642723	17.56	30	PASS

**802.11g OFDM modulation**

EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	55.08076964	17.41	30	PASS
6	2437	54.20008904	17.34	30	PASS
11	2462	54.70159629	17.38	30	PASS

4.4.7 TEST RESULTS (ANTENNA 2)

802.11b DSSS modulation

EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	57.41164622	17.59	30	PASS
6	2437	56.6239289	17.53	30	PASS
11	2462	57.01642723	17.56	30	PASS

**802.11g OFDM modulation**

EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	55.08076964	17.41	30	PASS
6	2437	54.20008904	17.34	30	PASS
11	2462	44.66835922	16.50	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5


4.5.6 TEST RESULTS (ANTENNA 1)

802.11b DSSS modulation


EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-2.91	8	PASS
6	2437	-3.02	8	PASS
11	2462	-3.56	8	PASS


CH1

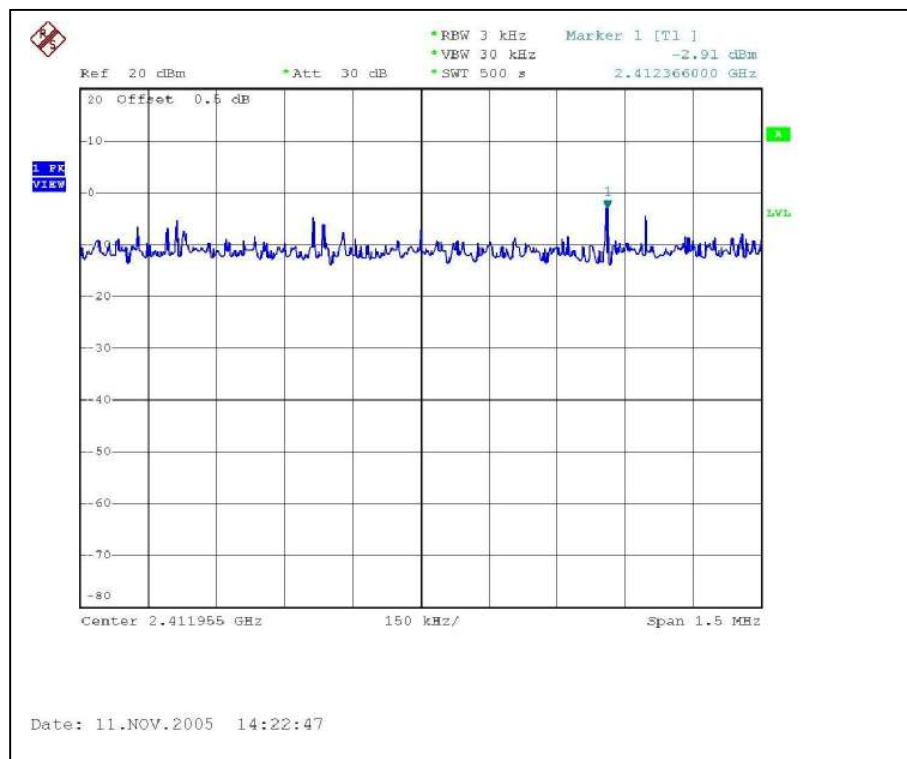

CH6

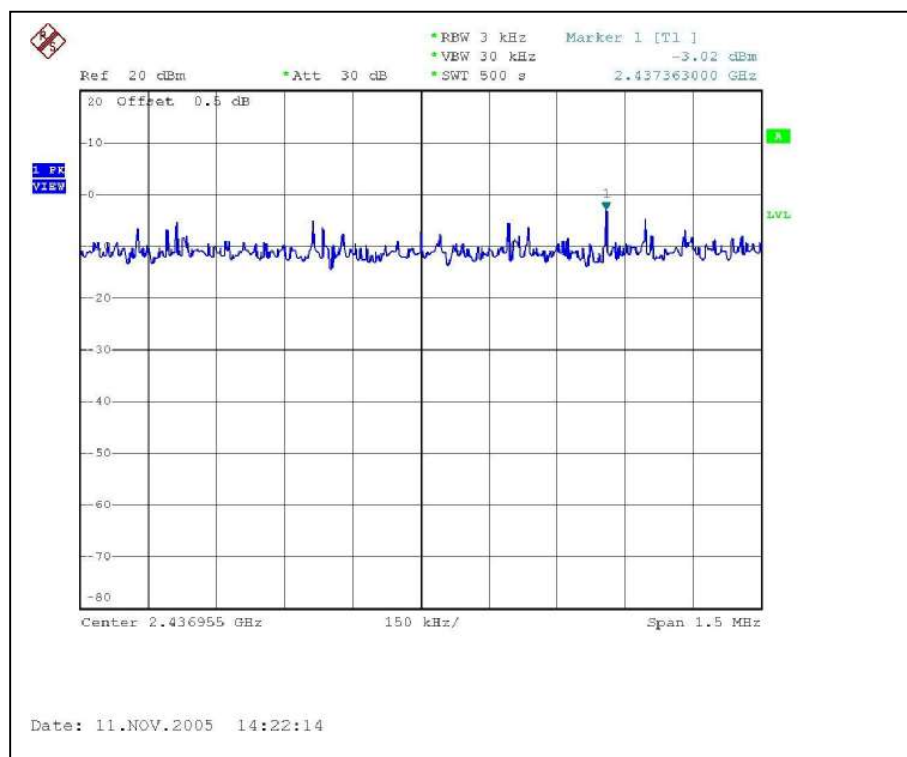

CH11

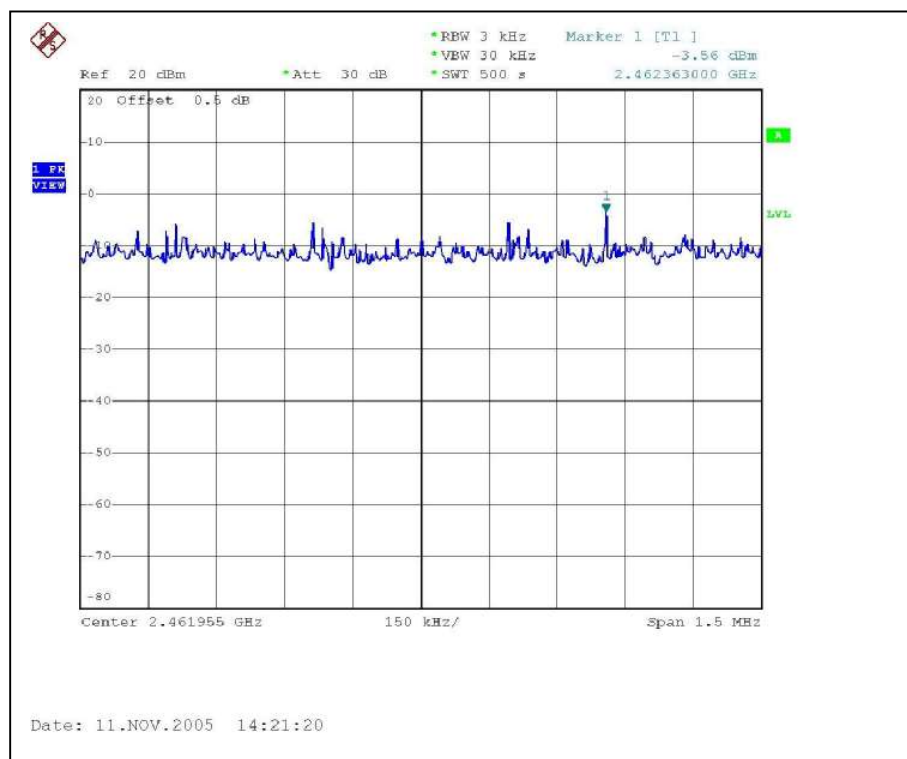


**802.11g OFDM modulation**


EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.71	8	PASS
6	2437	-11.56	8	PASS
11	2462	-11.98	8	PASS


CH1

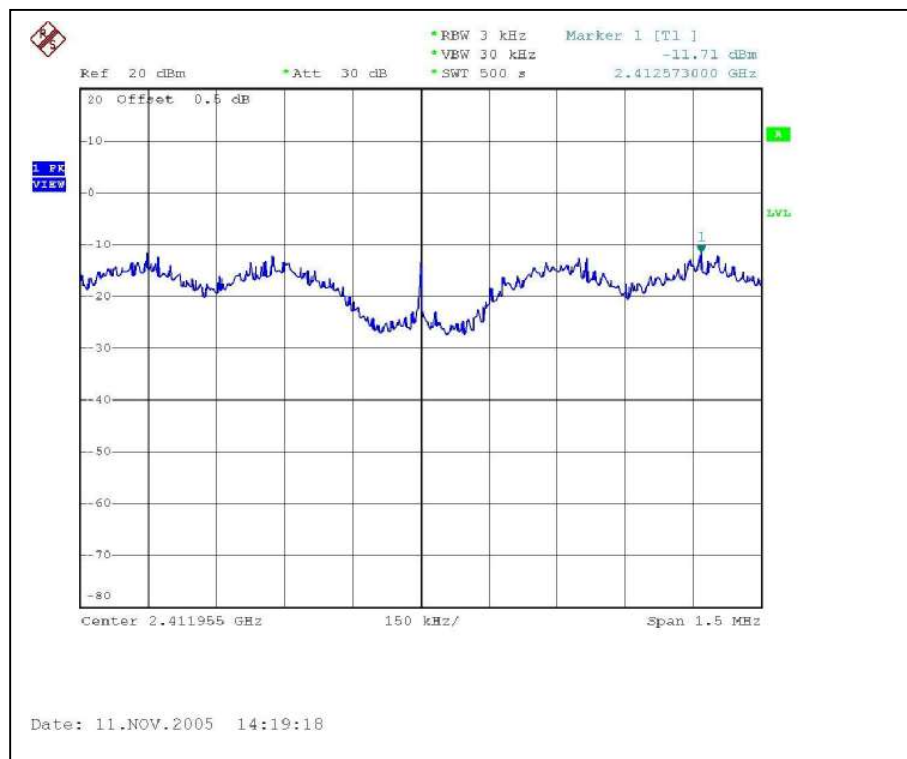

CH6

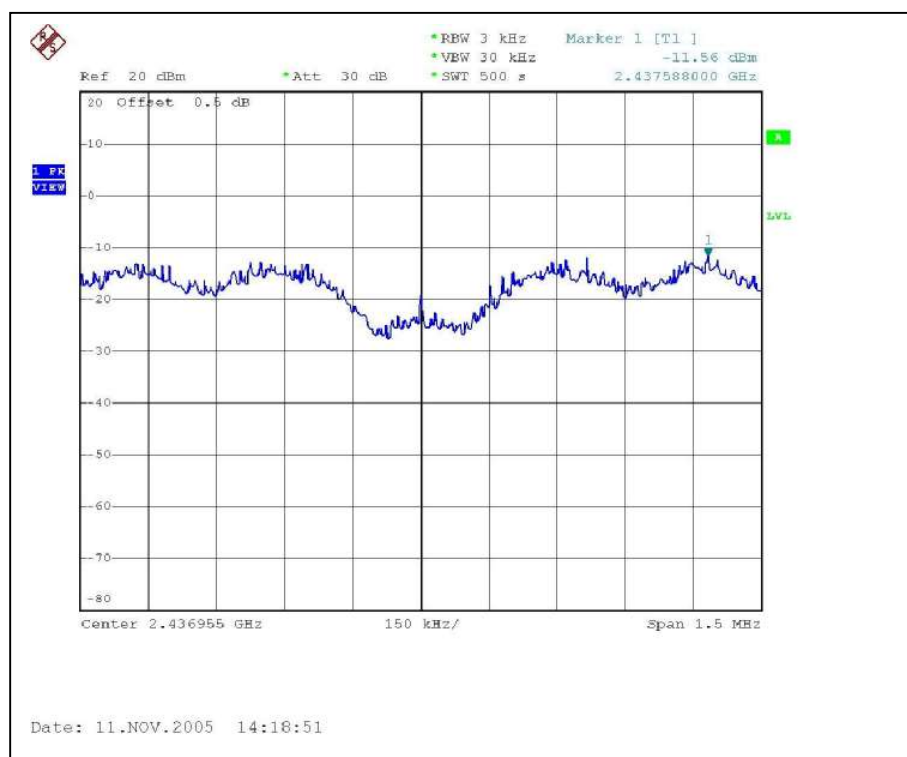

CH11

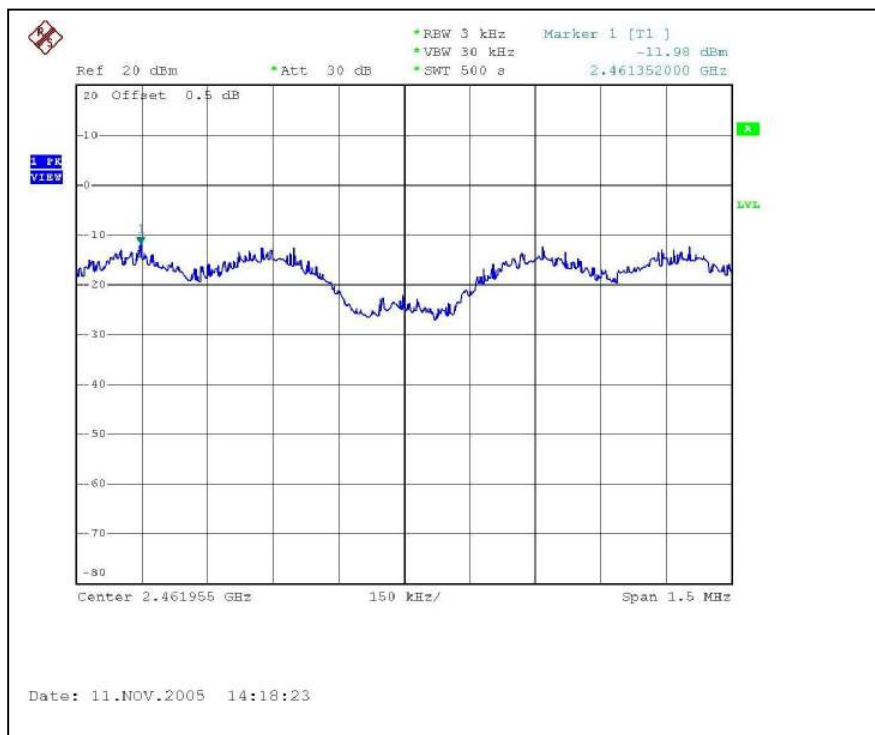


4.5.7 TEST RESULTS (ANTENNA 2)

802.11b DSSS modulation


EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-2.91	8	PASS
6	2437	-3.02	8	PASS
11	2462	-3.56	8	PASS


CH1

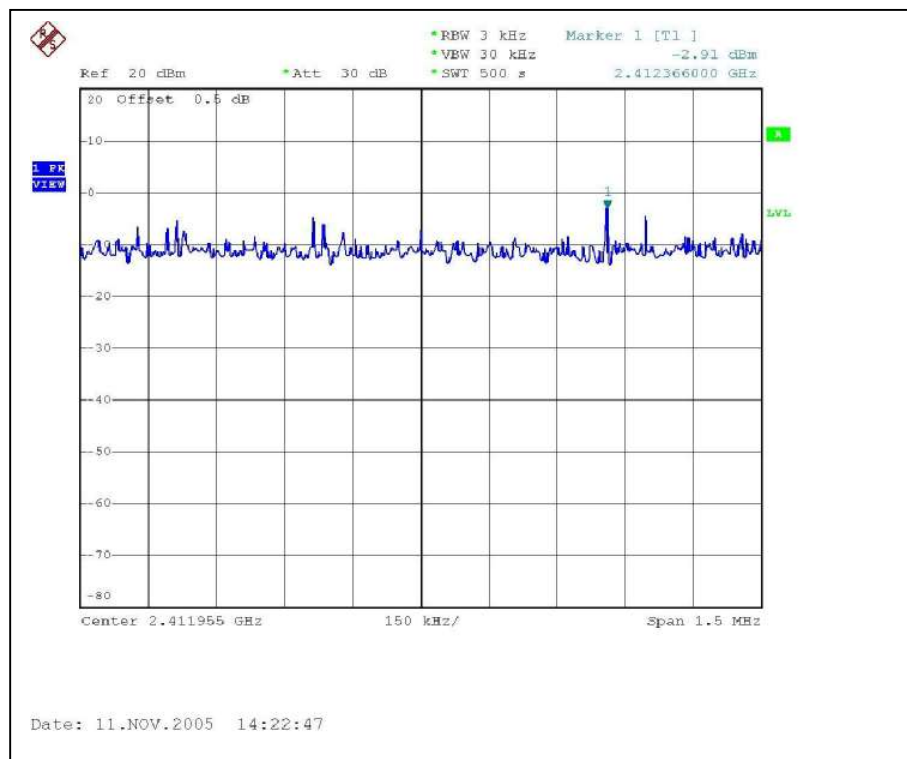

CH6

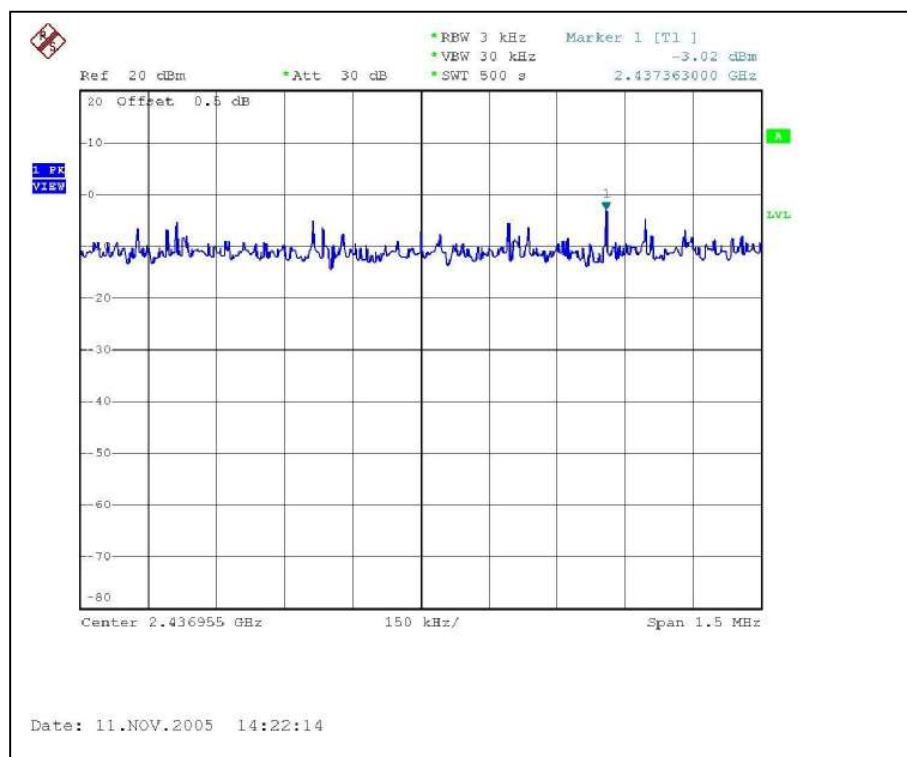

CH11

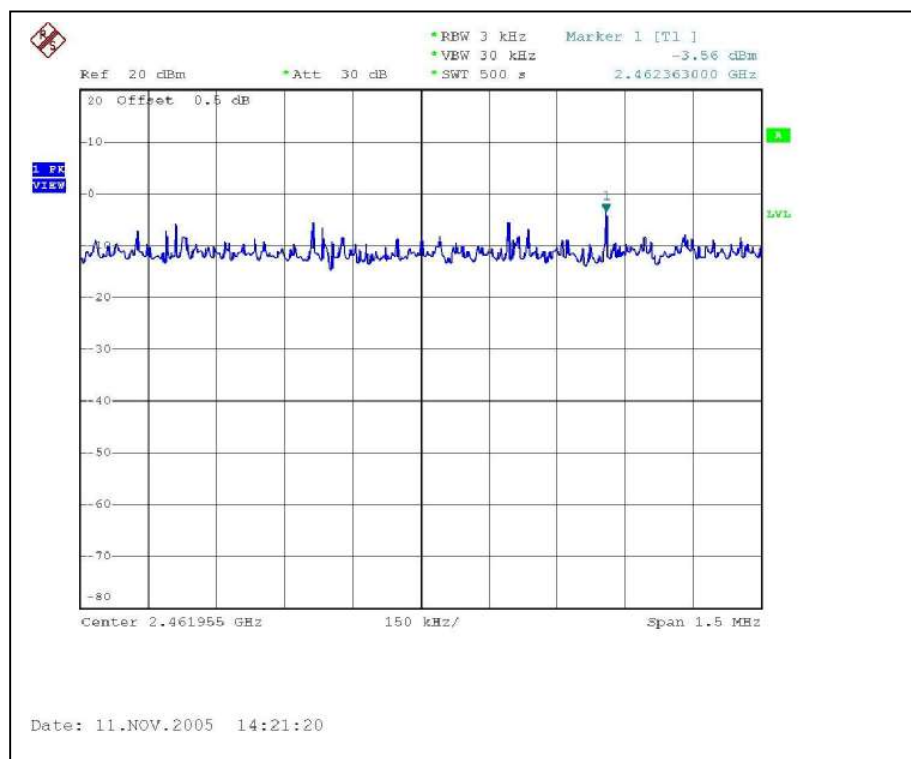


**802.11g OFDM modulation**


EUT	Wireless Digital Media Adapter Module		
MODEL	AW-GM120	ENVIRONMENTAL CONDITIONS	26 deg. C, 67%RH, 968 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Rex Huang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.71	8	PASS
6	2437	-11.56	8	PASS
11	2462	-12.71	8	PASS


CH1

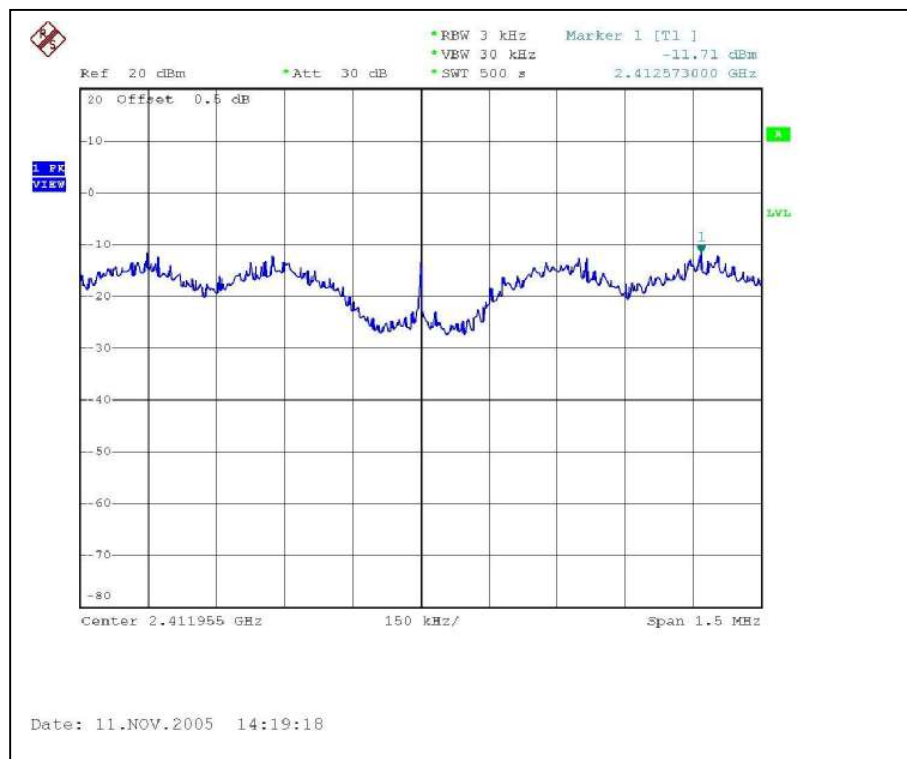

CH6

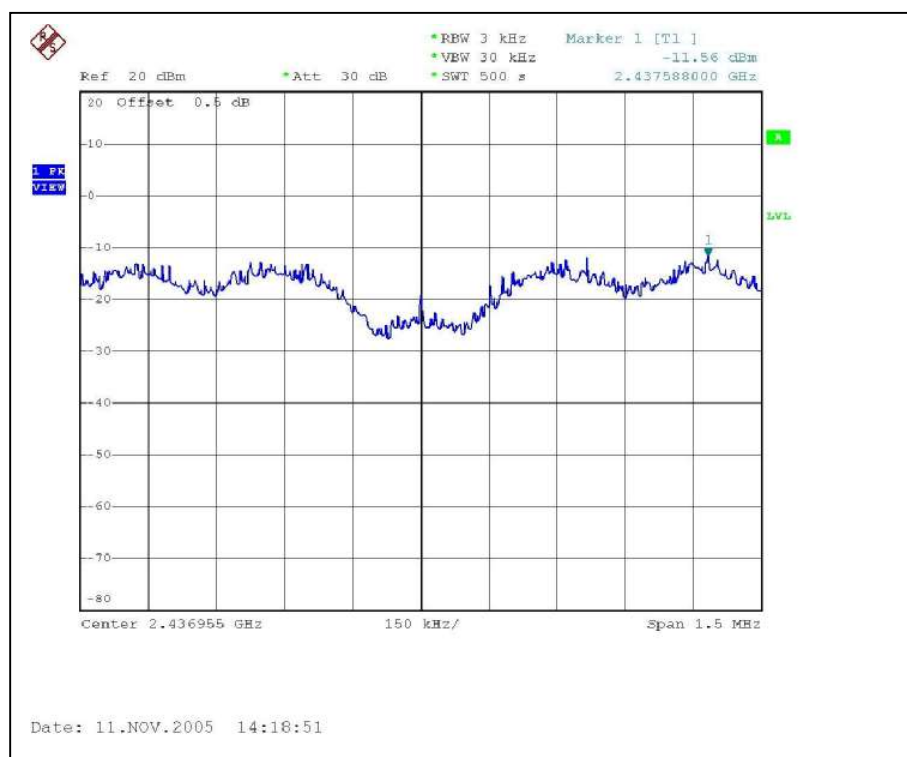

CH11

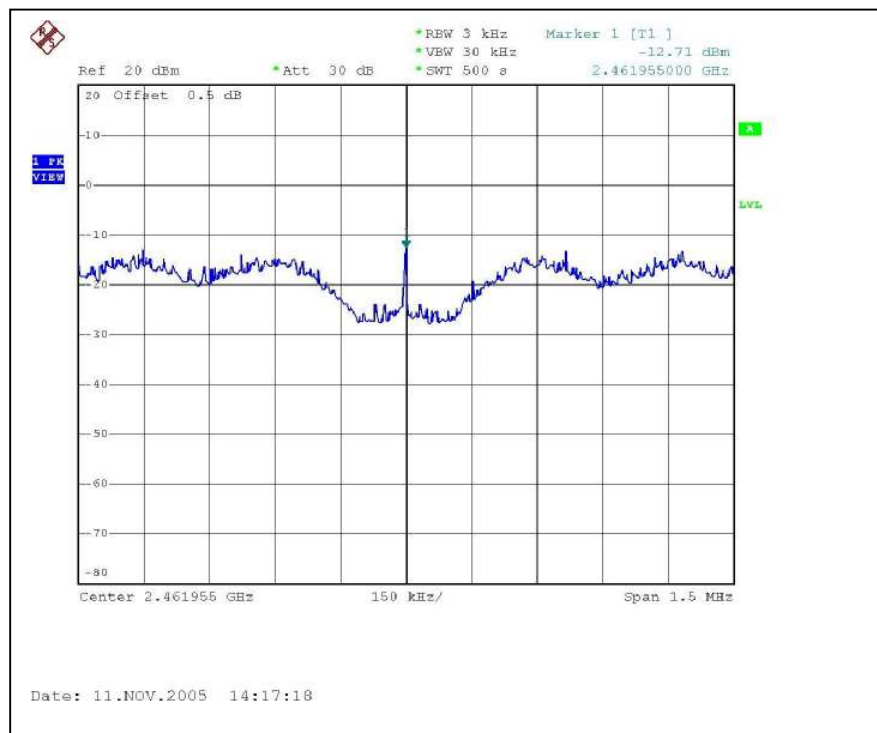

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2005

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5

4.6.5 TEST RESULTS (ANTENNA 1)

802.11b DSSS modulation

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):



The band edge emission plot of DSSS technique on the following first page show 52.6dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 110.4dBuV/m, so the maximum field strength in restrict band is $110.4 - 52.6 = 57.8$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of DSSS technique on the following first page shows 50.84dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 108.7dBuV/m, so the maximum field strength in restrict band is $108.7 - 50.84 = 57.86$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 57.32dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 103.3dBuV/m, so the maximum field strength in restrict band is $103.3 - 57.32 = 45.98$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 55.63dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 101.7dBuV/m, so the maximum field strength in restrict band is $101.7 - 55.63 = 46.07$ dBuV/m which is under 54 dBuV/m limit.

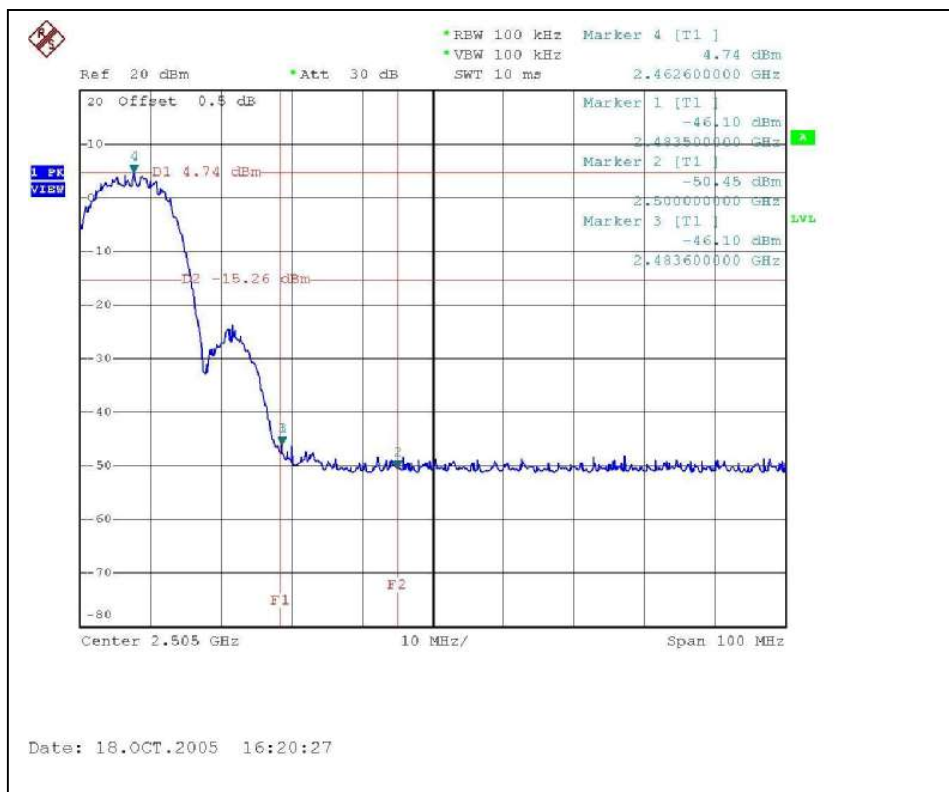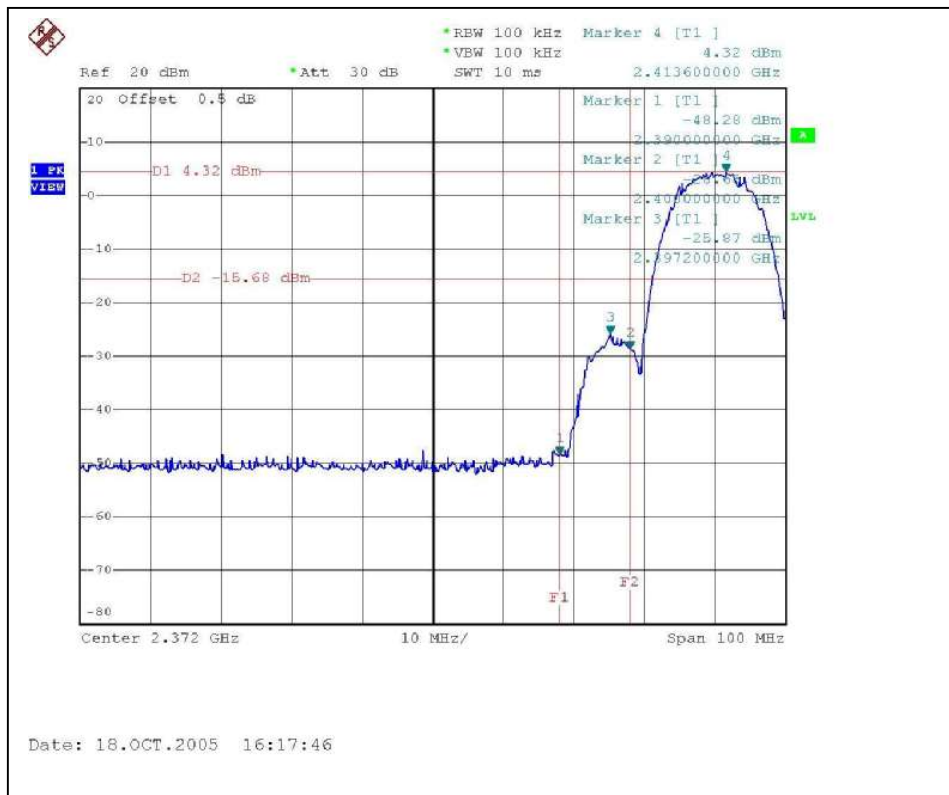


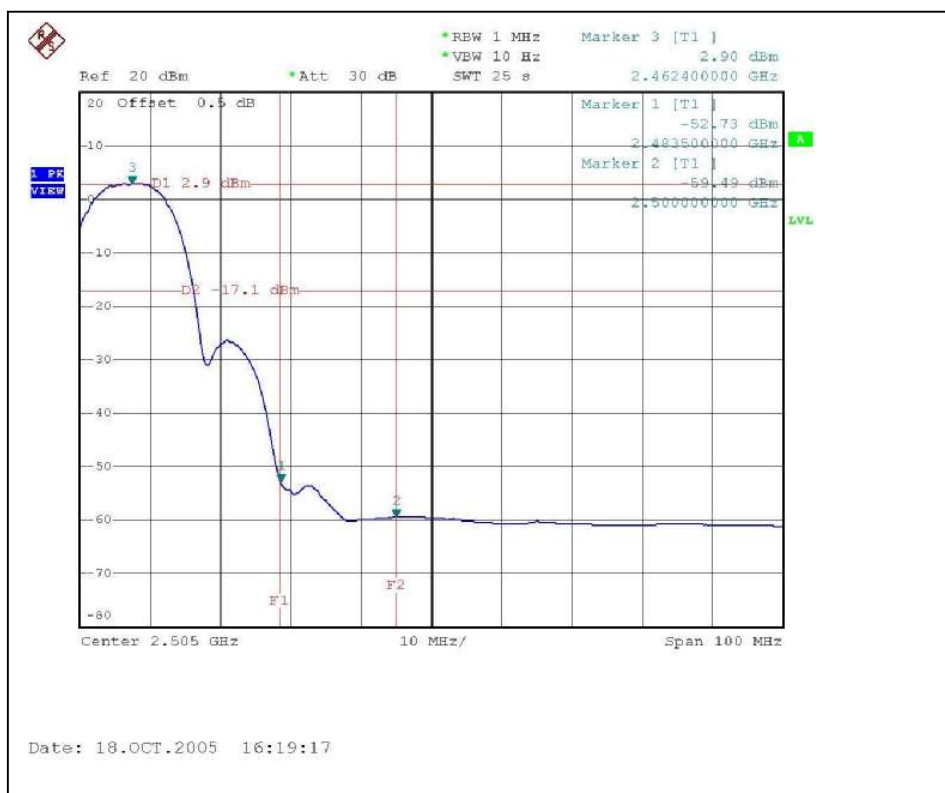

CH1

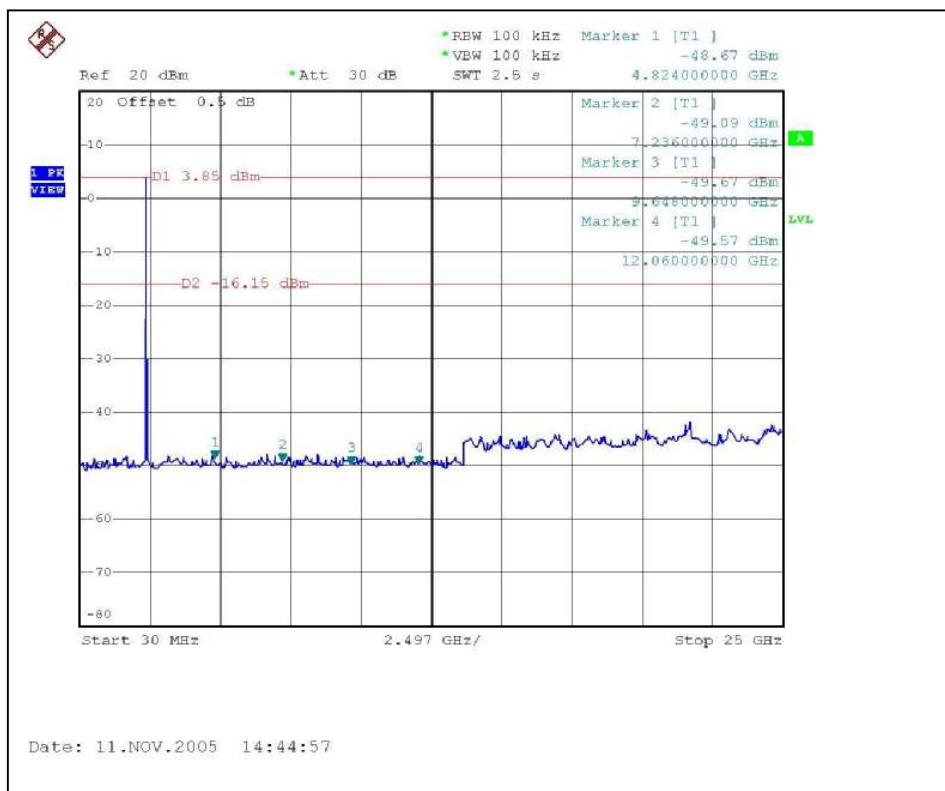

CH11

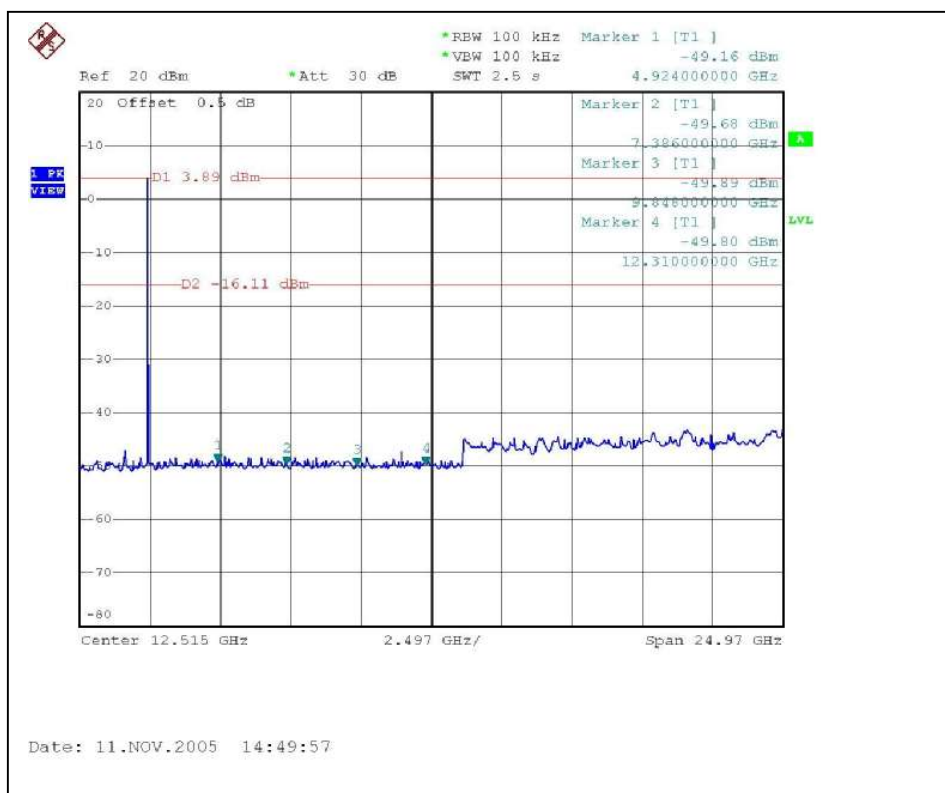

802.11g OFDM modulation

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):



The band edge emission plot of OFDM technique on the following first page show 42.38dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 106.4dBuV/m, so the maximum field strength in restrict band is $106.4 - 42.38 = 64.02$ dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot of OFDM technique on the following first page shows 40.32dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 106.4dBuV/m, so the maximum field strength in restrict band is $106.4 - 40.32 = 66.08$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 47.88dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 97.3dBuV/m, so the maximum field strength in restrict band is $97.3 - 47.88 = 49.42$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 44.33dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 96.6dBuV/m, so the maximum field strength in restrict band is $96.6 - 44.33 = 52.27$ dBuV/m which is under 54 dBuV/m limit.

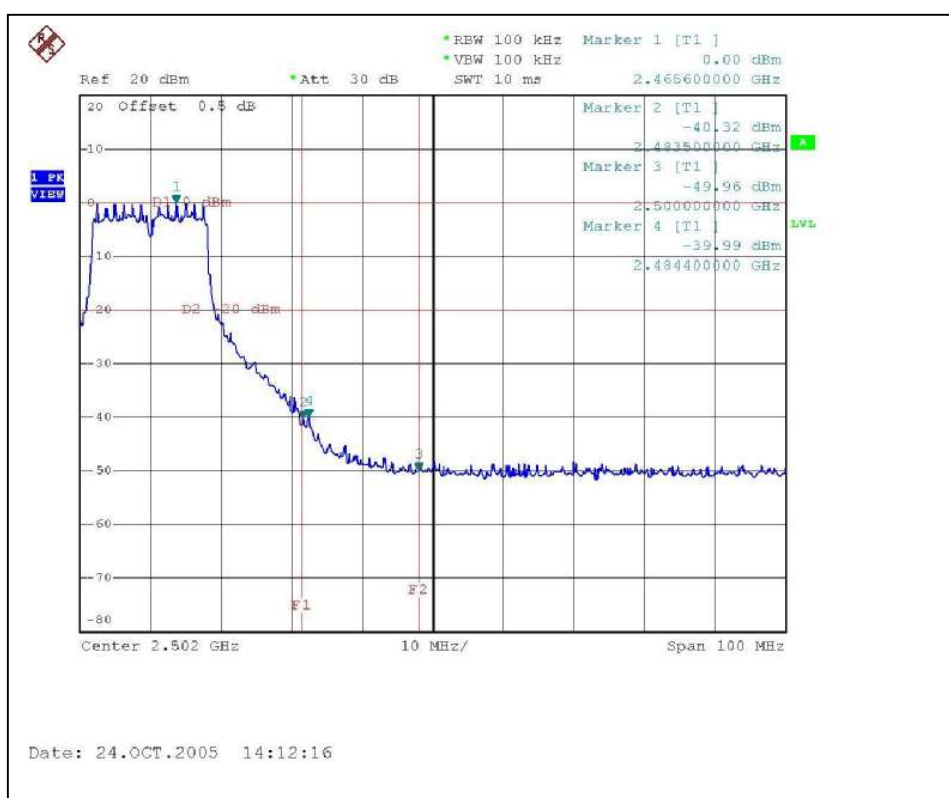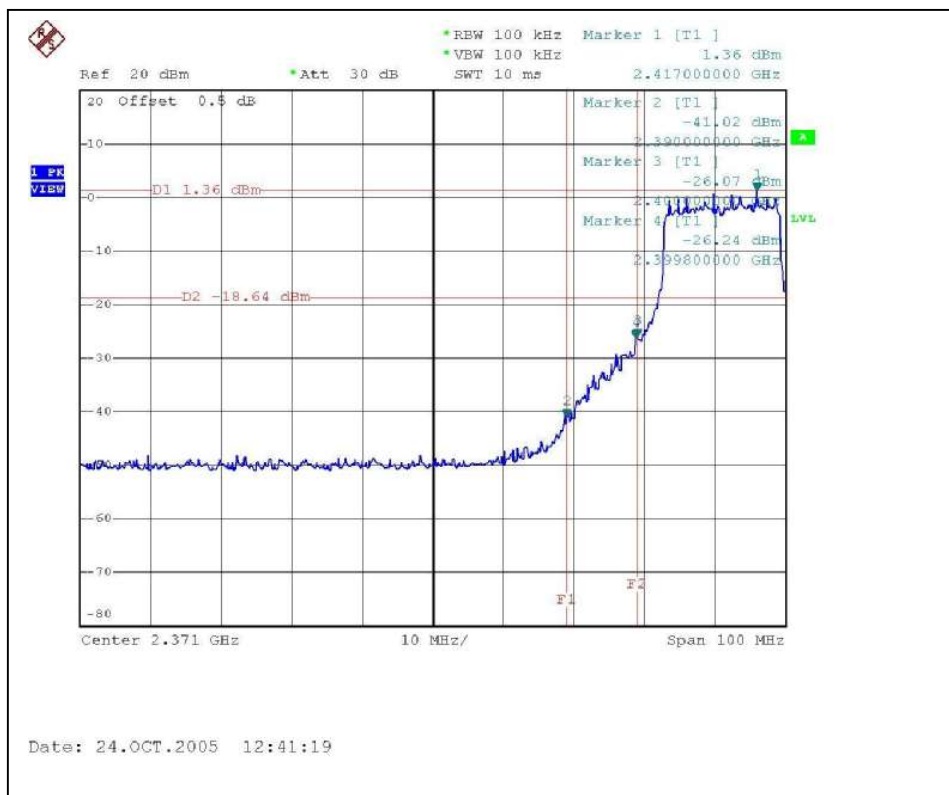




CH1

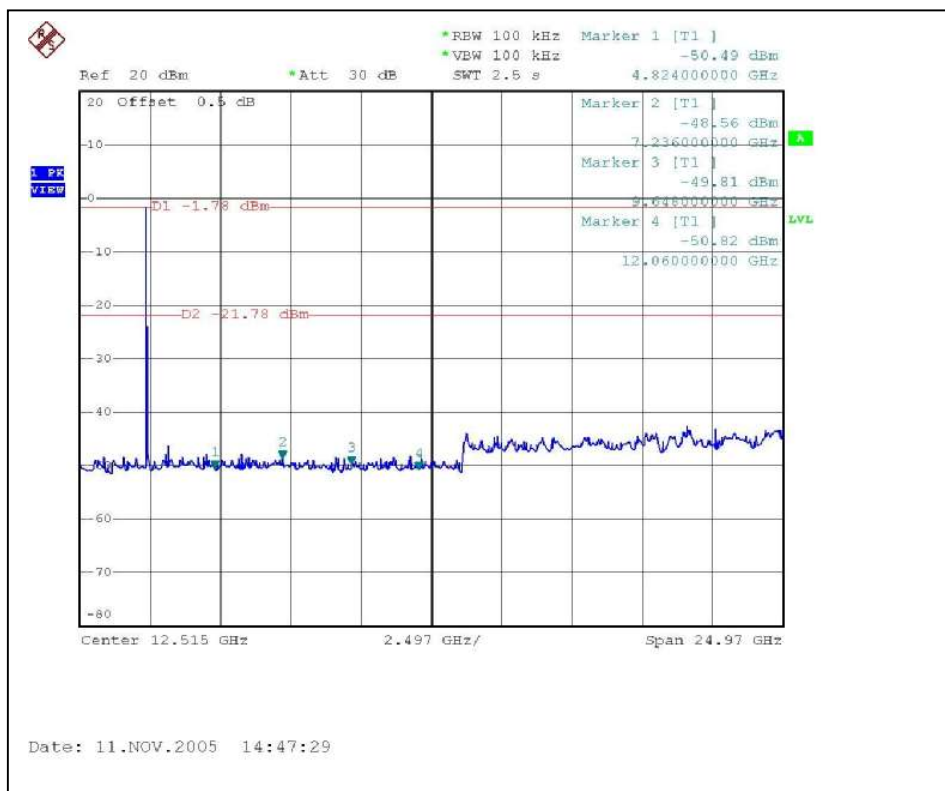

CH11

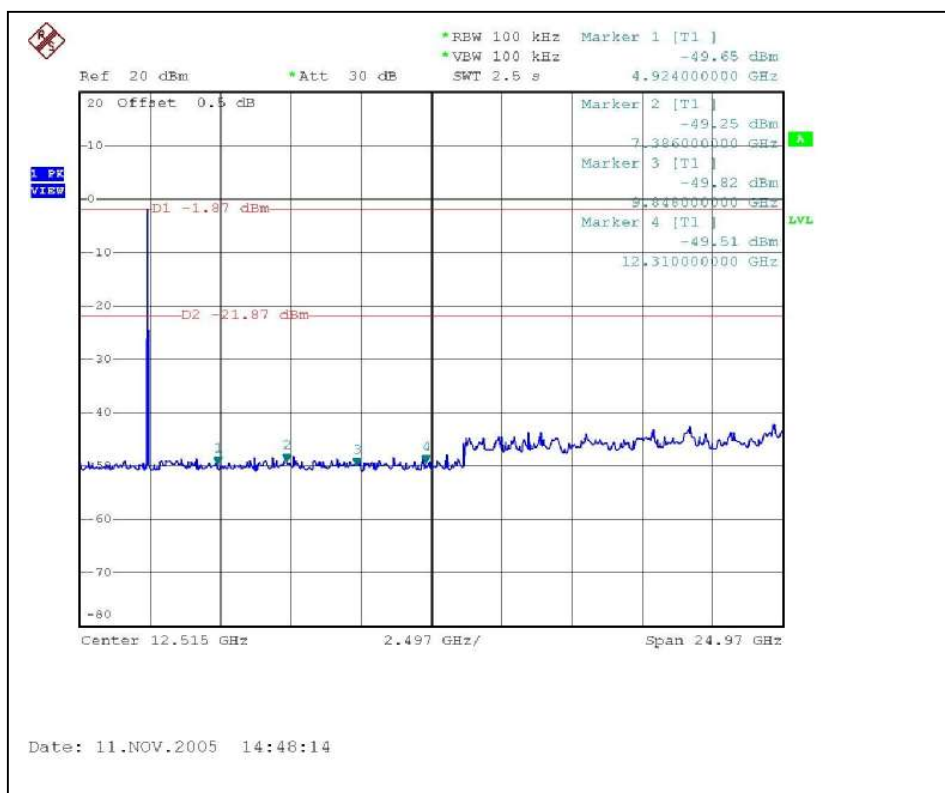

4.6.6 TEST RESULTS (ANTENNA 2)

802.11b DSSS modulation

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):



The band edge emission plot of DSSS technique on the following first page show 52.6dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 113.0dBuV/m, so the maximum field strength in restrict band is $113.0 - 52.6 = 60.4$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of DSSS technique on the following first page shows 50.84dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 112.5dBuV/m, so the maximum field strength in restrict band is $112.5 - 50.84 = 61.66$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 57.32dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 105.1dBuV/m, so the maximum field strength in restrict band is $105.1 - 57.32 = 47.78$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 55.63dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 104.6dBuV/m, so the maximum field strength in restrict band is $104.6 - 55.63 = 48.97$ dBuV/m which is under 54 dBuV/m limit.

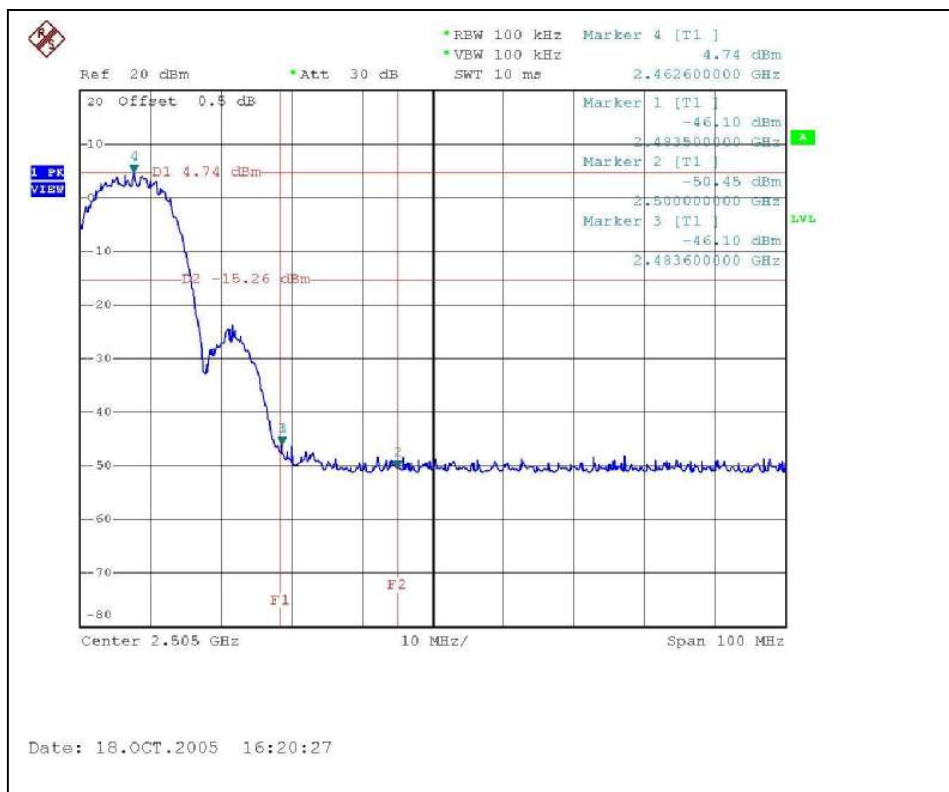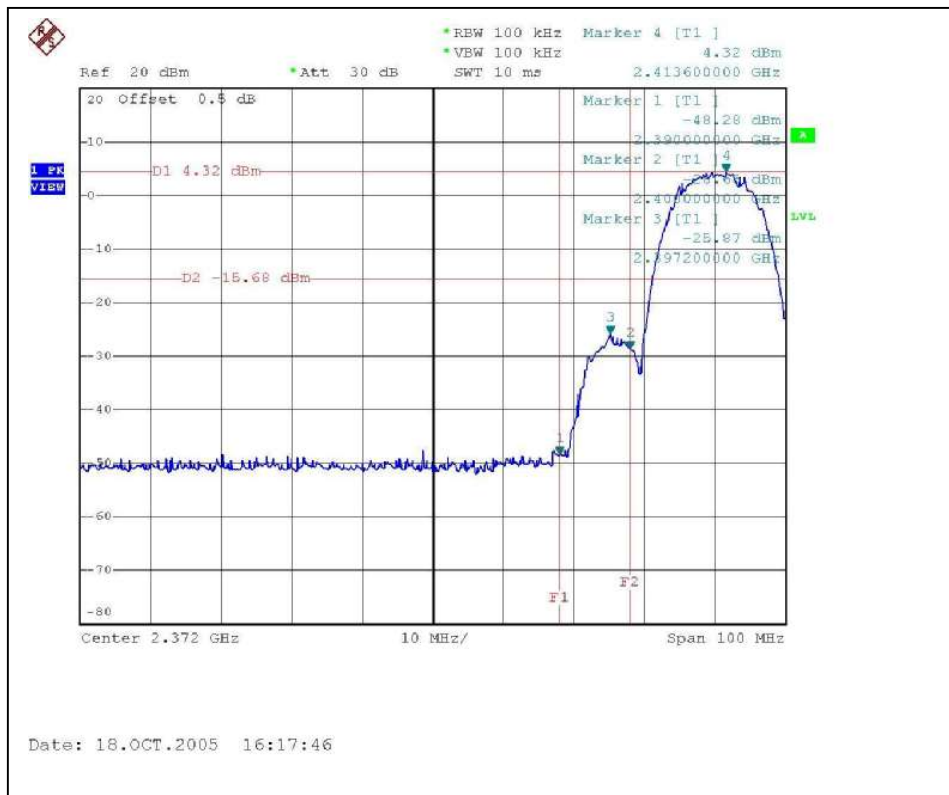


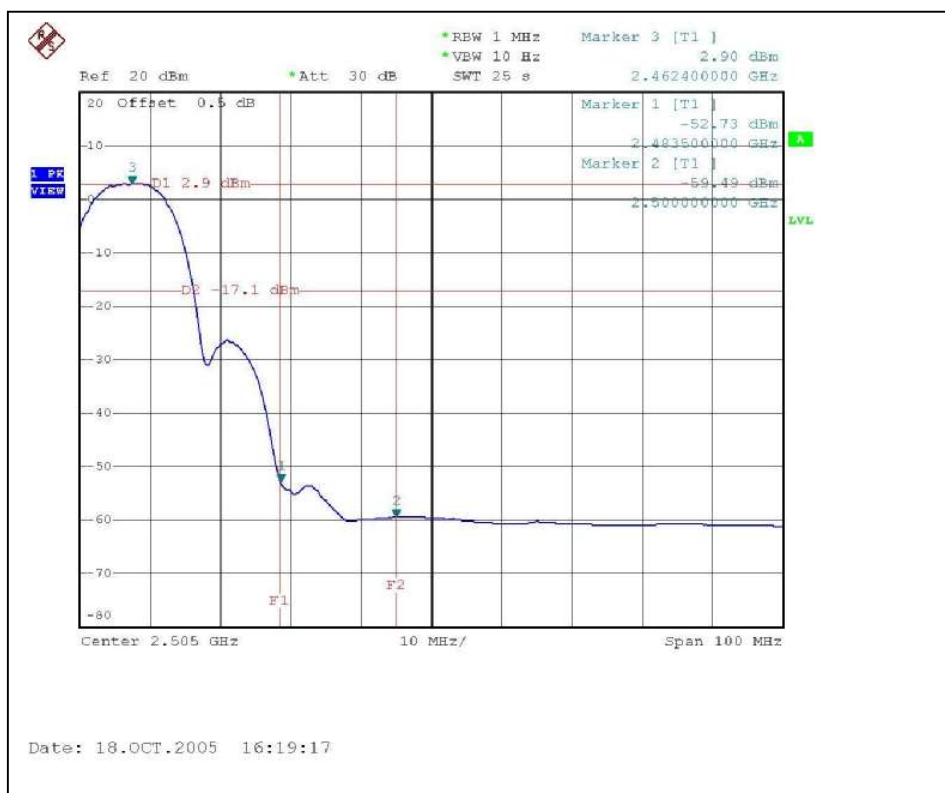

CH1

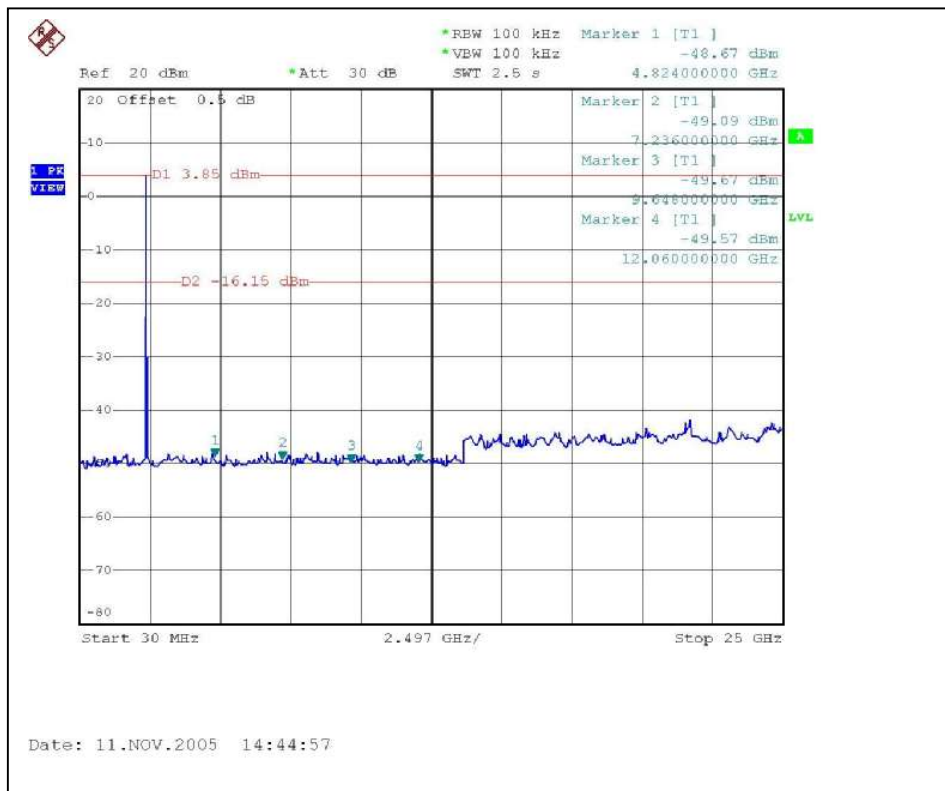

CH11

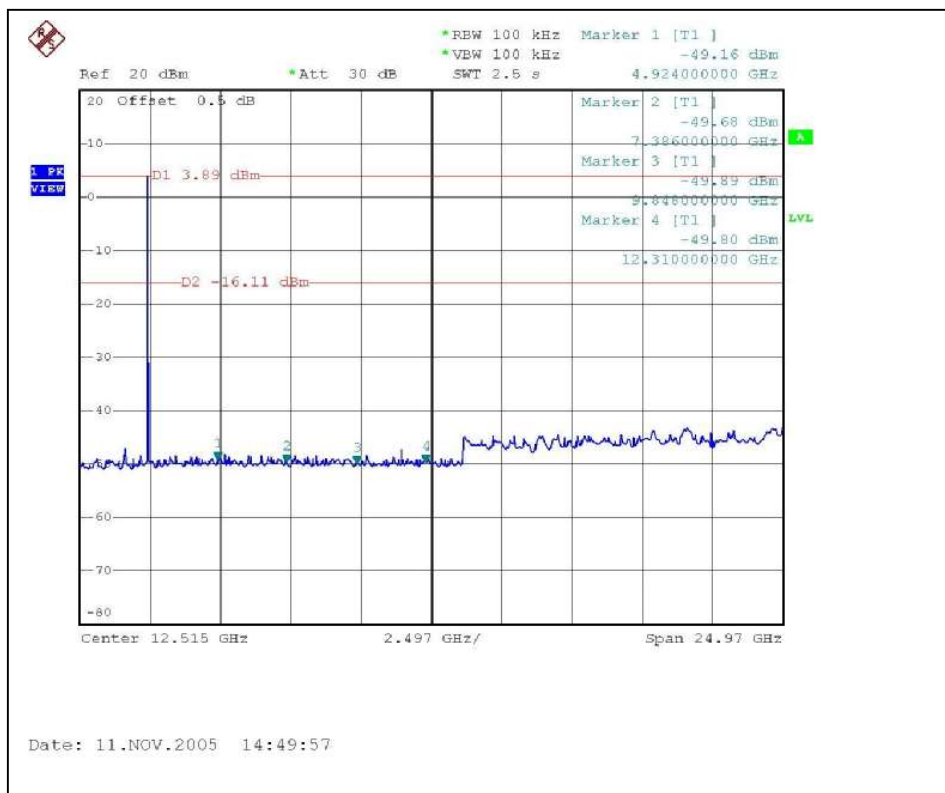

802.11g OFDM modulation

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):



The band edge emission plot of OFDM technique on the following first page show 42.38dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 111.2dBuV/m, so the maximum field strength in restrict band is $111.2 - 42.38 = 68.82$ dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot of OFDM technique on the following first page shows 41.7dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 108.6dBuV/m, so the maximum field strength in restrict band is $108.6 - 41.7 = 66.90$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 47.88dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 100.6dBuV/m, so the maximum field strength in restrict band is $100.6 - 47.88 = 52.72$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 46.86dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 98.7dBuV/m, so the maximum field strength in restrict band is $98.7 - 46.86 = 51.84$ dBuV/m which is under 54 dBuV/m limit.

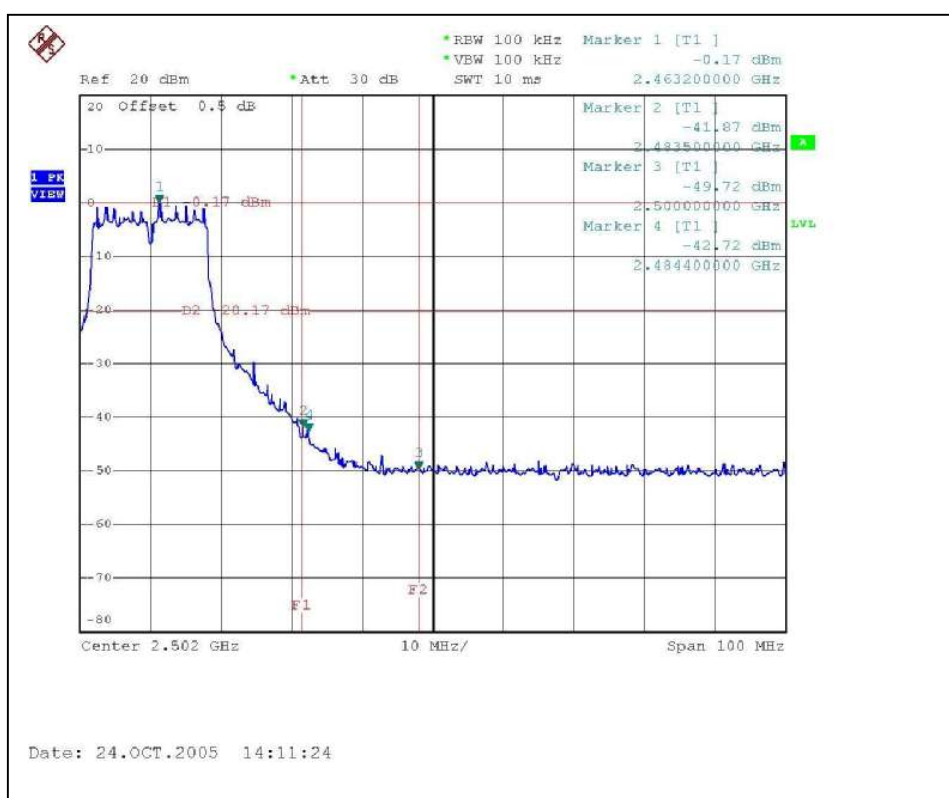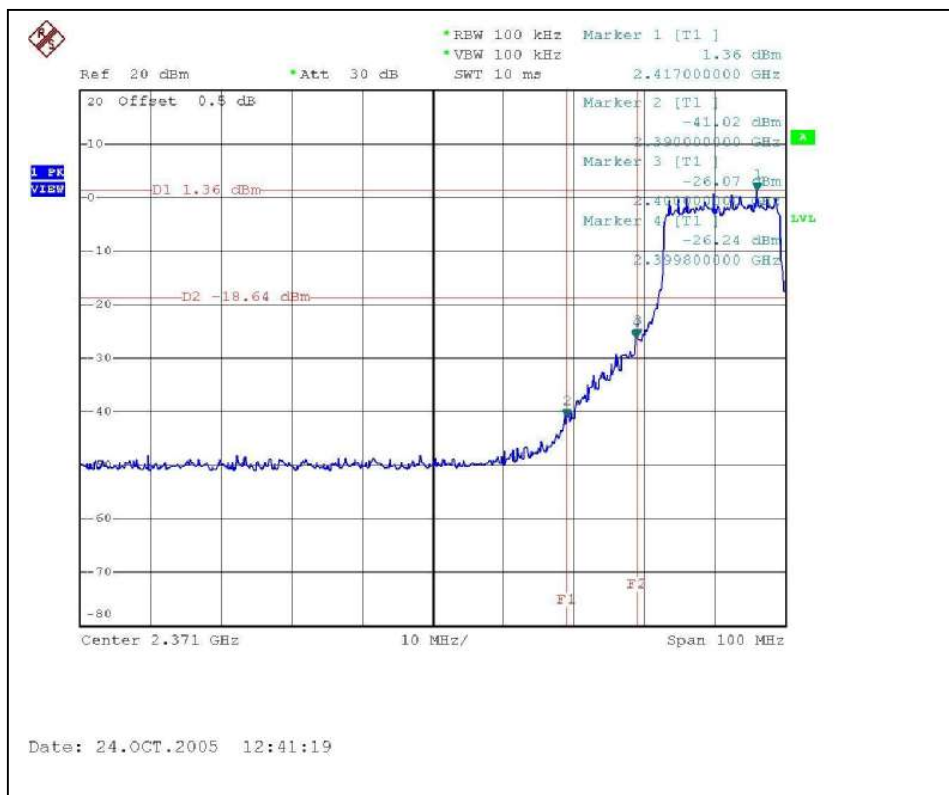




CH1

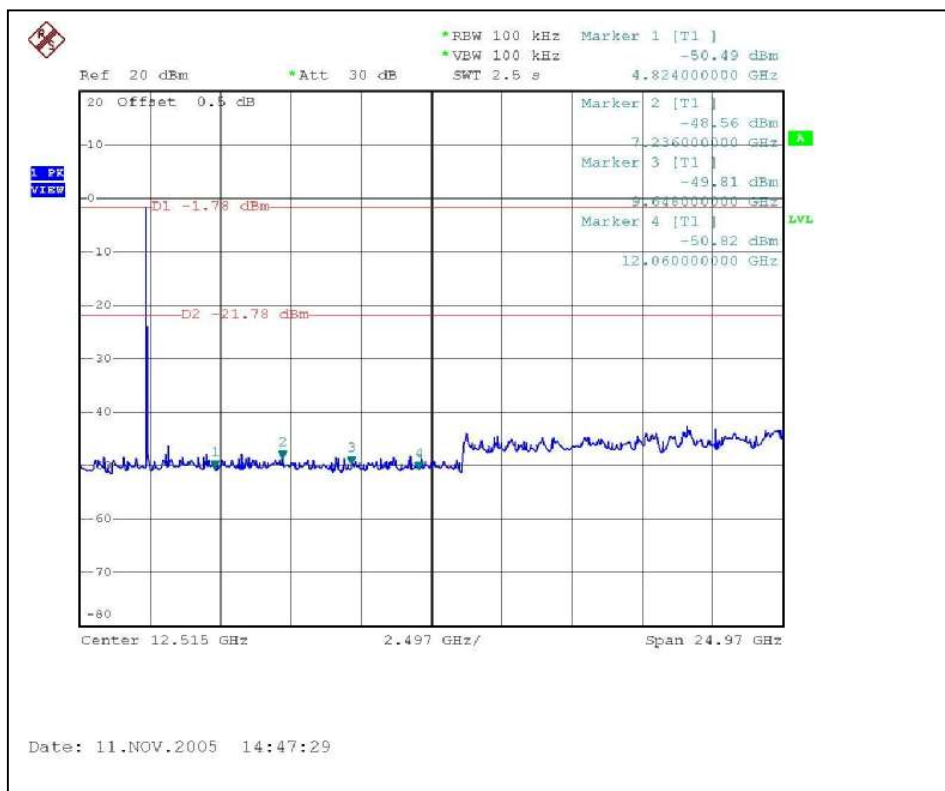

CH11

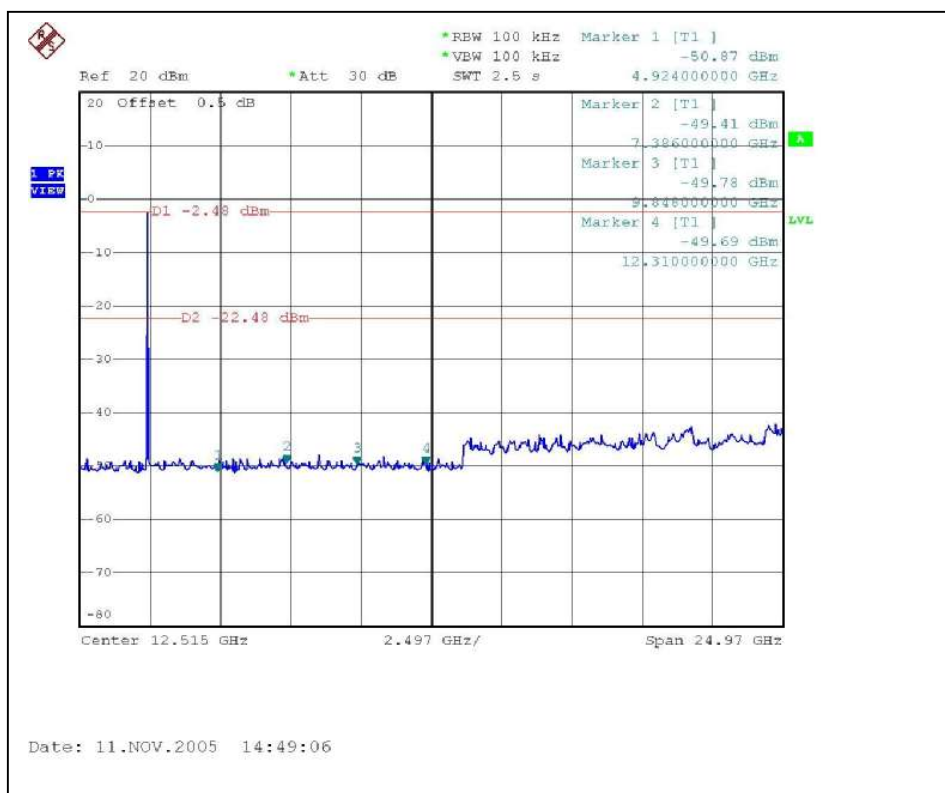

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antennas used in this product are as following:

No.	Gain (dBi)	Antenna Type	Antenna Connector
1	3.0	PIFA	I-PEX
2	1.5	1/2 λ Dipole	MHF

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST

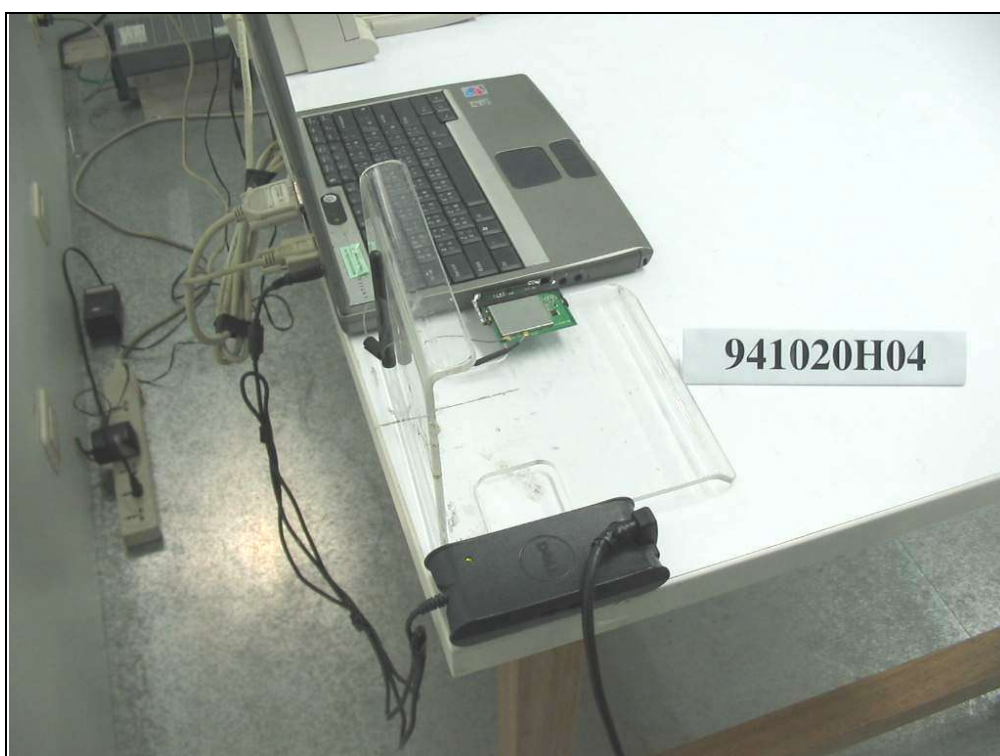



RADIATED EMISSION TEST (ANTENNA 1)





RADIATED EMISSION TEST (ANTENNA 2)







6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.