



Exhibit: Test Setup Photos

FCC ID: TMB-OSDI4W1
IC: 6028A-OSDI4W1

Report File #: 7169003033A-000


Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Figure 1 – Radiated Emissions Setup – Photo 1




Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Figure 2 – Radiated Emissions Setup – Photo 2




Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Figure 3 – Radiated Emissions Setup – Photo 3




Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Figure 4 – Radiated Emissions Setup – Photo 4




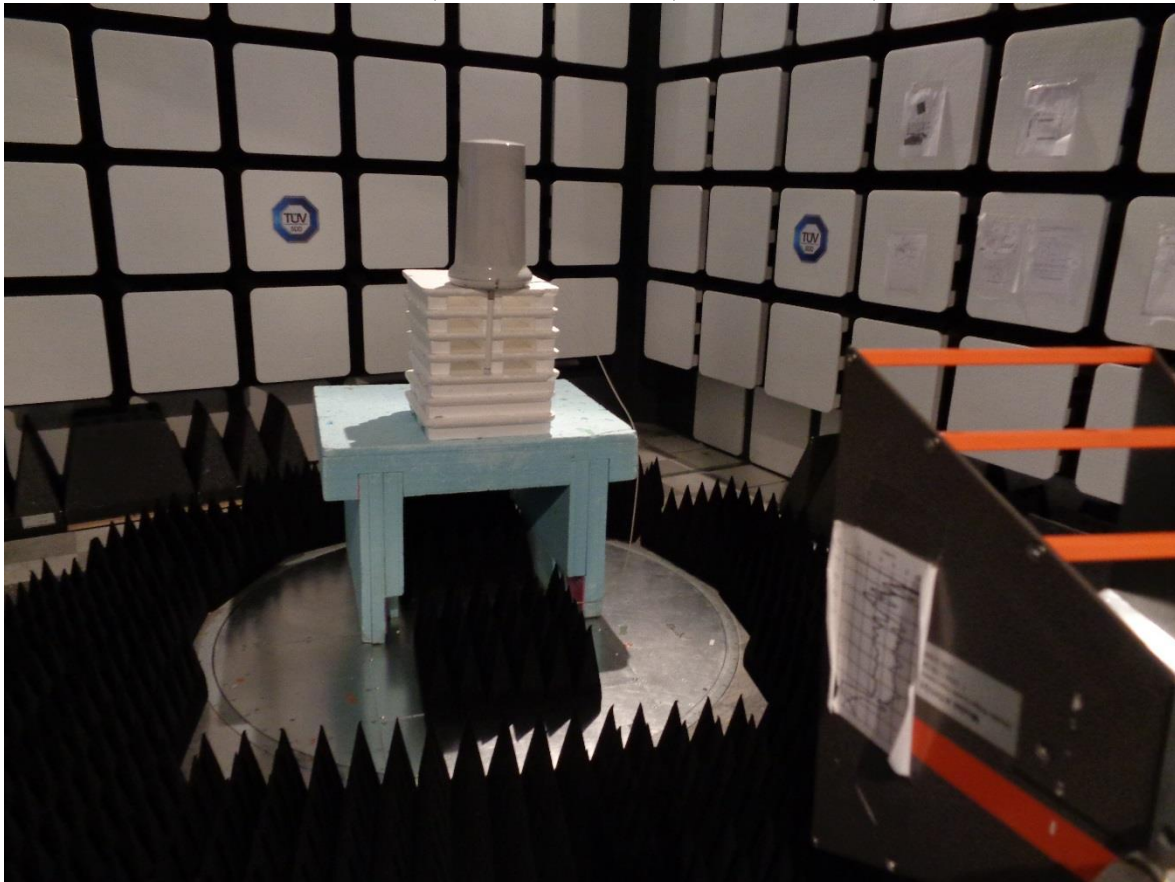
Client	Trilliant Networks Canada Inc.	
Product	Open Smart Device Interface (OSDI) SecureMesh Module	
Standard(s)	RSS 247 Issue 2/ FCC Part 15 Subpart C 15	

Figure 5 – Radiated Emissions Setup – Collocation of the OSDI4W1 (CL-R0368B-1.0 worst case) and the 5G1100 (XBRG-1100-A)



Note: As per ANSI C63.10-2013 Clause 6.3.1, below 1GHz, the height of the EUT was set to 80cm.