

# FCC Part 15 Subpart E §15.407

## Test Report

|                             |                             |
|-----------------------------|-----------------------------|
| <b>Equipment Under Test</b> | <b>Scan Tool</b>            |
| <b>Model Name</b>           | VCI II                      |
| <b>Applicant</b>            | G.I.T Co., Ltd.             |
| <b>FCC ID</b>               | TMGG1XDDMN001               |
| <b>Manufacturer</b>         | G.I.T Co., Ltd.             |
| <b>Date of Test(s)</b>      | 2014. 03. 18 ~ 2014. 05. 11 |
| <b>Date of Issue</b>        | 2014. 05. 12                |

In the configuration tested, the EUT complied with the standards specified above.

| Issue to  | Issue by  |
|---|---|
| <b>G.I.T Co., Ltd.</b><br>GIT BLDG., 38-5 Garakbon-Dong,<br>Songpa-Gu, Seoul, 138-801<br>KOREA<br><br>Tel.: +82-2-2189-5470<br>Fax: +82-2-2189-3344 | <b>MOVON CORPORATION</b><br>498-2, Geumeo-ro, Pogok-eup,<br>Cheoin-gu, Yongin-si, Gyeonggi-do,<br>Korea, 449-812<br><br>Tel.: +82-31-338-8837<br>Fax: +82-31-338-8847 |

**Revision history**

| Revision | Date of issue | Description | Revised by |
|----------|---------------|-------------|------------|
| --       | May. 12, 2014 | Initial     | --         |

## **Table of contents**

|  |           |
|--|-----------|
| <b>1. GENERAL INFORMATION.....</b>   | <b>4</b>  |
| <b>2. EUT DESCRIPTION.....</b>   | <b>5</b>  |
| <b>3. MEASUREMENT EQUIPMENT .....</b>  | <b>6</b>  |
| <b>4. TRANSMITTER RADIATED SPURIOUS EMISSIONS AND CONDUCTED SPURIOUS EMISSIONS .....</b> | <b>7</b>  |
| <b>5. 26 dB BANDWIDTH .....</b>  | <b>27</b> |
| <b>6. OUTPUT POWER .....</b>   | <b>31</b> |
| <b>7. PEAK POWER SPECTRAL DENSITY .....</b>  | <b>35</b> |
| <b>8. PEAK EXCURSION .....</b>   | <b>39</b> |
| <b>9. FREQUENCY STABILITY .....</b>  | <b>43</b> |
| <b>10. ANTENNA REQUIREMENT .....</b>   | <b>45</b> |
| <b>11. RF EXPOSURE EVALUATION .....</b>  | <b>46</b> |
| <b>12. TEST SETUP PHOTO OF EUT .....</b>   | <b>48</b> |

## 1. General information

### 1.1. Details of applicant

Applicant : G.I.T Co., Ltd.  
Address : GIT BLDG., 38-5 Garakbon-Dong, Songpa-Gu, Seoul, 138-801 KOREA  
Contact Person : MIN KYU JEON  
Telephone : +82-2-2189-3353  
Fax : +82-2-2189-3333

### 1.2. Summary of test results

The EUT has been tested according to the following specifications;

| Section in FCC part 15                    | Description   | Result |
|---|---|--------|
| §15.205(a)<br>§15.209(a)<br>§15.407(b)(1) | Transmitter radiated spurious emissions,<br>Conducted spurious emission | C      |
| §15.407(a)(1)                             | Output power  | C      |
| §15.407(a)(1)                             | Peak power spectral density   | C      |
| §15.407(a)(1)                             | Peak excursion  | C      |
| §15.407(g)                                | frequency stability   | C      |
| §1.1307(b)(1)                             | RF exposure evaluation  | C      |

The sample was tested according to the following specification:

ANSI C63.4-2003

FCC Public Notice KDB789033 D01 v01r03.



TEST SITE REGISTRATION NUMBER:

FCC(670686)

#### ※ Abbreviation

C Complied  
N/A Not applicable  
F Fail

### Approval Signatories

| Test and Report Completed by :  | Report Approval by :   |
|---|--|
|  |  |
| Jungmoo Her<br>Test Engineer<br>MOVON CORPORATION                                   | Issac Jin<br>Technical Manager<br>MOVON CORPORATION                                  |

## 2. EUT Description

|                               |                       |
|-------------------------------|-----------------------|
| Kind of product               | Scan tool             |
| Model Name                    | VCI II                |
| Serial Number                 | N/A                   |
| Power supply                  | DC 7V ~ 35V           |
| Frequency range               | 5 180 MHz ~ 5 240 MHz |
| Modulation technique          | OFDM                  |
| Number of channels            | 4                     |
| Antenna gain                  | 3.952 dB i (Max.)     |
| Test Site Registration Number | FCC(670686)           |

### 2.1. Declarations by the manufacturer

None

### 2.2. Details of modification

None

### 3. Measurement equipment

| Equipment                 | Manufacturer | Model           | Serial number        | Calibration Interval | Calibration due. |
|---------------------------|--------------|-----------------|----------------------|----------------------|------------------|
| EMI Test Receiver         | R&S          | ESIB26          | 100196/026           | 1 year               | 2014-12-14       |
| Signal Generator          | R&S          | SMR27           | 100089               | 1 year               | 2014-12-13       |
| Spectrum Analyzer         | R&S          | FSV-40          | 100832               | 1 year               | 2014-10-04       |
| Power Meter               | Agilent      | E4416A          | GB41290645           | 1 year               | 2014-10-04       |
| Power Sensor              | Agilent      | 9327A           | US40441490           | 1 year               | 2014-10-04       |
| Double Ridge Horn Antenna | R&S          | HF906           | 100236               | 2 year               | 2015-02-28       |
| Horn Antenna              | AH Systems   | SAS-572         | 269                  | 2 year               | 2015-09-06       |
| Double Ridge Horn Antenna | ETS LINDGREN | 3116B           | 133350               | 2 year               | 2016-02-26       |
| Bi - Log Antenna          | AH Systems   | SAS-521-7       | 128                  | 2 year               | 2015-10-04       |
| Power Amplifier           | MITEQ        | AM-1431         | 1497315              | 1 year               | 2014-10-04       |
| Power Amplifier           | MITEQ        | AFS43-01002600  | 1374382              | 1 year               | 2014-10-04       |
| High Pass Filter          | Wainwright   | WHK3.0/18G-10SS | 508                  | 1 year               | 2014-10-04       |
| DC Power Supply           | HP           | 6674A           | 3637A01351           | 1 year               | 2014-10-04       |
| Controller                | INNCO        | CO2000          | co200/064/6961003/L  | N/A                  | N/A              |
| Antenna Master            | INNCO        | MA4000          | MA4000/038/6961003/L | N/A                  | N/A              |
| Loop Antenna              | ETS LINDGREN | 6502            | 00118166             | 2 year               | 2015-09-27       |

※ Remark;  
Support equipment


| Description       | Manufacturer | Model         | Serial number |
|-------------------|--------------|---------------|---------------|
| Notebook computer | DELL         | Latitude D510 | -             |

#### 4. Transmitter radiated spurious emissions and conducted spurious emissions


##### 4.1. Test setup

##### 4.1.1. Transmitter radiated spurious emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9kHz to 30MHz Emissions.

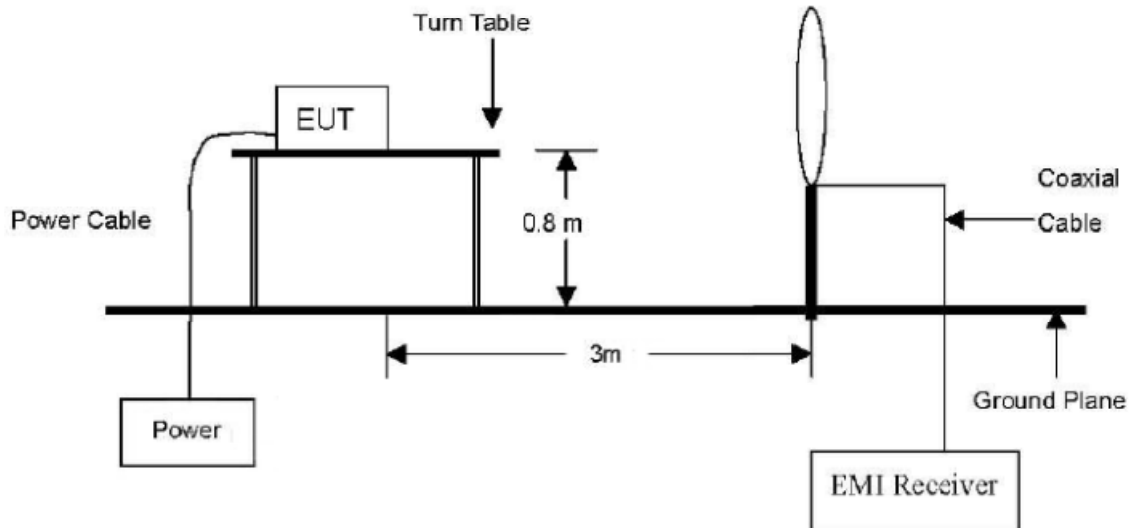

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

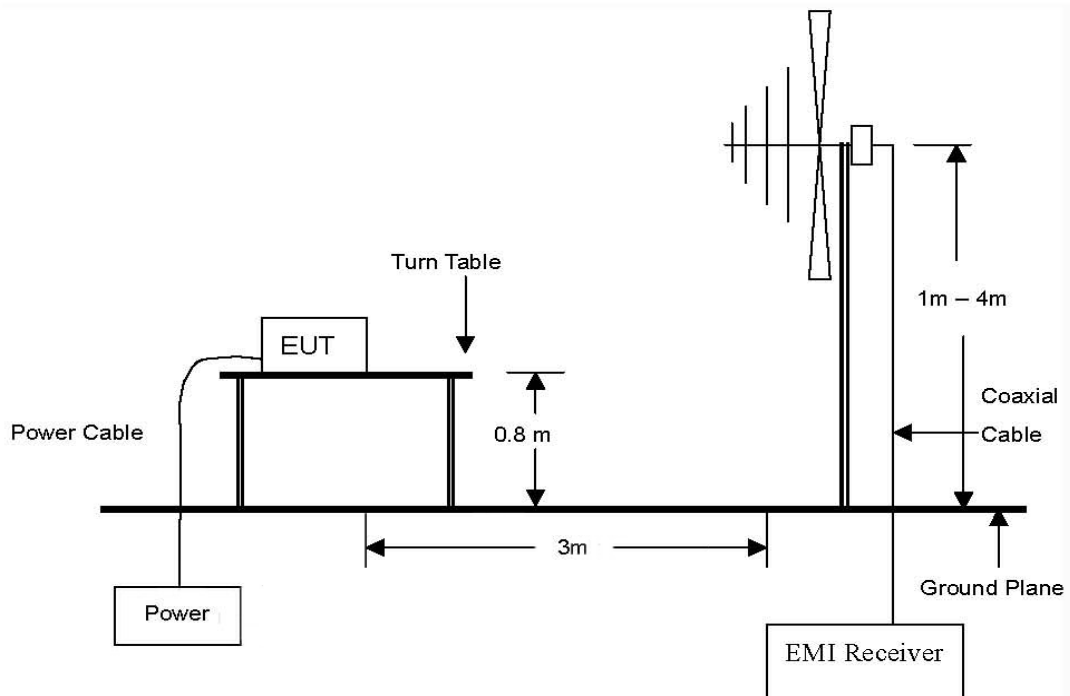

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 40 GHz emissions.

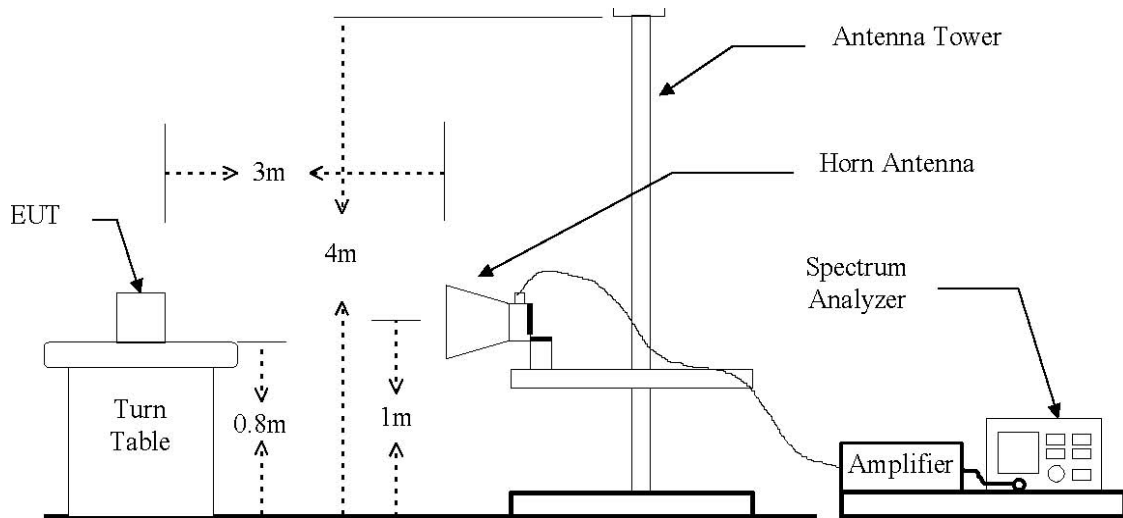

## 4.2. Limit

For transmitters operating in the 5.15 ~ 5.25 GHz band : all emissions outside of the 5.15 ~ 5.35 GHz band shall not exceed an EIRP of -27 dB m/MHz

$$E = \frac{1000000\sqrt{30P}}{3} \mu V/m, \text{ where } P \text{ is the eirp (Watts)}$$

| EIRP (dB m) | Field Strength at 3m (dBμV/m) |
|-------------|-------------------------------|
| -27         | 68                            |

According to §15.205(a), Except as provided elsewhere in this Subpart, the emissions from Restricted bands of operation shall not exceed the field strength levels specified in the following table:

| MHz                   | MHz                     | MHz             | GHz           |
|-----------------------|-------------------------|-----------------|---------------|
| 0.090 – 0.110         | 16.42 – 16.423          | 399.9 – 410     | 4.5 – 5.15    |
| 0.495 – 0.505         | 16.694 75 – 16.695 25   | 608 – 614       | 5.35 – 5.46   |
| 2.173 5 – 2.190 5     | 16.804 25 -16.804 75    | 960 – 1240      | 7.25 – 7.75   |
| 4.125 – 4.128         | 25.5 – 25.67            | 1300 – 1427     | 8.025 – 8.5   |
| 4.177 25 – 4.177 75   | 37.5 – 38.25            | 1435 – 1626.5   | 9.0 – 9.2     |
| 4.207 25 – 4.207 75   | 73 – 74.6               | 1645.5 – 1646.5 | 9.3 – 9.5     |
| 6.215 – 6.218         | 74.8 – 75.2             | 1660 – 1710     | 10.6 – 12.7   |
| 6.267 75 – 6.268 25   | 108 – 121.94            | 1718.8 – 1722.2 | 13.25 – 13.4  |
| 6.311 75 – 6.312 25   | 123 – 138               | 2200 – 2300     | 14.47 – 14.5  |
| 8.291 – 8.294         | 149.9 – 150.05          | 2310 – 2390     | 15.35 – 16.2  |
| 9.362 – 8.366         | 156.524 75 – 156.525 25 | 2483.5 – 2500   | 17.7 – 21.4   |
| 8.376 25 – 8.386 75   | 156.7 – 156.9           | 2655 – 2900     | 22.01 – 23.12 |
| 8.414 25 – 8.414 75   | 162.012 5 – 167.17      | 3260 – 3267     | 23.6 – 24.0   |
| 12.29 – 12.293        | 167.72 – 173.2          | 3332 - 3339     | 31.2 – 31.8   |
| 12.519 75 – 12.520 25 | 240 – 285               | 3345.8 – 3358   | 36.43 – 36.5  |
| 12.576 75 – 12.577 25 | 322 -335.4              | 3600 – 4400     |               |
| 13.36 – 13.41         |                         |                 |               |

### 4.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

#### 4.3.1. Test procedures for radiated spurious emissions

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

※ **Remark;**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for Peak detection (PK) at frequency below 30 MHz
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

#### 4.3.2. Test procedures for conducted spurious emissions

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 1 MHz, VBW = 1 MHz.

#### 4.4. Test result

Ambient temperature: 23 °C  
Relative humidity: 43 % R.H.

##### 4.4.1. Spurious radiated emission

The frequency spectrum from 9kHz to 30 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.  
To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: Normal mode

##### A. Low channel (5 180 MHz)

| Radiated emissions   |                |               | Ant. | Correction factors |         | Total           | Limit          |             |
|--|----------------|---------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)  | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                |               |      |                    |         |                 |                |             |

##### B. Middle channel (5 220 MHz)

| Radiated emissions   |                |               | Ant. | Correction factors |         | Total           | Limit          |             |
|--|----------------|---------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)  | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                |               |      |                    |         |                 |                |             |

##### C. High channel (5 240 MHz)

| Radiated emissions   |                |               | Ant. | Correction factors |         | Total           | Limit          |             |
|--|----------------|---------------|------|--------------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)  | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                |               |      |                    |         |                 |                |             |

#### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: N\_20MHz mode

**A. Low channel (5 180 MHz)**

| Radiated emissions   |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |         |                       |                      |             |

**B. Middle channel (5 220 MHz)**

| Radiated emissions   |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |         |                       |                      |             |

**C. High channel (5 240 MHz)**

| Radiated emissions   |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |         |                       |                      |             |

※ **Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.2. Spurious radiated emission

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: Normal mode

##### A. Low channel (5 180 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 34.90              | 26.58                | PK            | V    | 7.85               | 1.50    | 35.93                 | 40.00                | 4.07        |
| 159.80             | 24.21                | PK            | V    | 10.48              | 3.80    | 38.49                 | 43.50                | 5.01        |
| 218.80             | 22.63                | PK            | H    | 12.85              | 4.10    | 39.58                 | 46.00                | 6.42        |
| 242.70             | 21.50                | PK            | V    | 14.60              | 4.10    | 40.20                 | 46.00                | 5.80        |
| 387.30             | 18.98                | PK            | H    | 16.26              | 5.80    | 41.04                 | 46.00                | 4.96        |
| Above 400          | Not detected         |               |      |                    |         |                       |                      |             |

##### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

### B. Middle channel (5 220 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 34.90              | 24.30                | PK            | V    | 7.85               | 1.50    | 33.65                 | 40.00                | 6.35        |
| 159.80             | 24.52                | PK            | V    | 10.48              | 3.80    | 38.80                 | 43.50                | 4.70        |
| 218.80             | 21.20                | PK            | H    | 12.85              | 4.10    | 38.15                 | 46.00                | 7.85        |
| 242.70             | 23.06                | PK            | V    | 14.60              | 4.10    | 41.76                 | 46.00                | 4.24        |
| 387.30             | 19.22                | PK            | H    | 16.26              | 5.80    | 41.28                 | 46.00                | 4.72        |
| Above 400          | Not detected         |               |      |                    |         |                       |                      |             |

### C. High channel (5 240 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 34.90              | 25.83                | PK            | V    | 7.85               | 1.50    | 35.18                 | 40.00                | 4.82        |
| 159.80             | 25.02                | PK            | V    | 10.48              | 3.80    | 39.30                 | 43.50                | 4.20        |
| 218.80             | 21.22                | PK            | H    | 12.85              | 4.10    | 38.17                 | 46.00                | 7.83        |
| 242.70             | 23.96                | PK            | V    | 14.60              | 4.10    | 42.66                 | 46.00                | 3.34        |
| 387.30             | 20.26                | PK            | H    | 16.26              | 5.80    | 42.32                 | 46.00                | 3.68        |
| Above 400          | Not detected         |               |      |                    |         |                       |                      |             |

#### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: N\_20MHz mode

**A. Low channel (5 180 MHz)**

| Radiated emissions |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 54.60              | 24.47                | PK            | V    | 7.85               | 1.30    | 33.62                 | 40.00                | 6.38        |
| 102.30             | 24.40                | PK            | H    | 10.23              | 3.50    | 38.13                 | 43.50                | 5.37        |
| 329.70             | 19.85                | PK            | H    | 14.87              | 5.30    | 40.02                 | 46.00                | 5.98        |
| 517.80             | 18.75                | PK            | H    | 17.51              | 6.50    | 42.76                 | 46.00                | 3.24        |
| -                  | -                    | -             | -    | -                  | -       | -                     | -                    | -           |
| Above 600          | Not detected         |               |      |                    |         |                       |                      |             |

※ **Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

### B. Middle channel (5 220 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 54.60              | 22.11                | PK            | V    | 7.85               | 1.30    | 31.26                 | 40.00                | 8.74        |
| 102.30             | 23.56                | PK            | H    | 10.23              | 3.50    | 37.29                 | 43.50                | 6.21        |
| 329.70             | 20.30                | PK            | H    | 14.87              | 5.30    | 40.47                 | 46.00                | 5.53        |
| 517.80             | 17.22                | PK            | H    | 17.51              | 6.50    | 41.23                 | 46.00                | 4.77        |
| -                  | -                    | -             | -    | -                  | -       | -                     | -                    | -           |
| Above 600          | Not detected         |               |      |                    |         |                       |                      |             |

### C. High channel (5 240 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |         | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 54.60              | 23.58                | PK            | V    | 7.85               | 1.30    | 32.73                 | 40.00                | 7.27        |
| 102.30             | 25.25                | PK            | H    | 10.23              | 3.50    | 38.98                 | 43.50                | 4.52        |
| 329.70             | 19.92                | PK            | H    | 14.87              | 5.30    | 40.09                 | 46.00                | 5.91        |
| 517.80             | 18.39                | PK            | H    | 17.51              | 6.50    | 42.40                 | 46.00                | 3.60        |
| -                  | -                    | -             | -    | -                  | -       | -                     | -                    | -           |
| Above 600          | Not detected         |               |      |                    |         |                       |                      |             |

#### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.3. Spurious radiated emission

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Operation mode: Normal mode

##### A. Low channel (5 180 MHz)

| Radiated emissions   |                      |               | Ant. | Correction factors |               |            | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------------|------------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | D.C.F (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |               |            |                       |                      |             |

##### B. Middle channel (5 220 MHz)

| Radiated emissions   |                      |               | Ant. | Correction factors |               |            | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------------|------------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | D.C.F (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |               |            |                       |                      |             |

##### C. High channel (5 240 MHz)

| Radiated emissions   |                      |               | Ant. | Correction factors |               |            | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------------|------------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | D.C.F (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |               |            |                       |                      |             |

#### ※ Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

Operation mode: N\_20MHz mode

**A. Low channel (5 180 MHz)**

| Radiated emissions   |                      |               | Ant. | Correction factors |               |            | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------------|------------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | D.C.F (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |               |            |                       |                      |             |

**B. Middle channel (5 220 MHz)**

| Radiated emissions   |                      |               | Ant. | Correction factors |               |            | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------------|------------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | D.C.F (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |               |            |                       |                      |             |

**C. High channel (5 240 MHz)**

| Radiated emissions   |                      |               | Ant. | Correction factors |               |            | Total                 | Limit                |             |
|--|----------------------|---------------|------|--------------------|---------------|------------|-----------------------|----------------------|-------------|
| Frequency (MHz)  | Reading (dB $\mu$ V) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | D.C.F (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                      |               |      |                    |               |            |                       |                      |             |

※ **Remark**

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.4. Restricted Band

##### A. 4.5 – 5.15 GHz measurement

Operation mode: Normal mode

\* Low channel (5 180 MHz)

| Radiated emissions |                |               | Ant. | Correction factors |               | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 4 942              | 30.34          | Peak          | H    | 33.91              | -40.50        | 23.75           | 74.00          | 50.25       |
| 4 942              | 19.69          | Average       | H    | 33.91              | -40.50        | 13.10           | 54.00          | 40.90       |
| 4 942              | 30.77          | Peak          | V    | 33.91              | -40.50        | 24.18           | 74.00          | 49.82       |
| 4 942              | 20.12          | Average       | V    | 33.91              | -40.50        | 13.53           | 54.00          | 40.47       |

Operation mode: N\_20MHz mode


\* Low channel (5 180 MHz)

| Radiated emissions |                |               | Ant. | Correction factors |               | Total           | Limit          |             |
|--------------------|----------------|---------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detector mode | Pol. | Ant. factor (dB/m) | Amp + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 4 889              | 33.37          | Peak          | H    | 33.91              | -40.50        | 26.78           | 74             | 47.22       |
| 4 889              | 23.50          | Average       | H    | 33.91              | -40.50        | 16.91           | 54             | 37.09       |
| 4 889              | 31.14          | Peak          | V    | 33.91              | -40.50        | 24.55           | 74             | 49.45       |
| 4 889              | 22.09          | Average       | V    | 33.91              | -40.50        | 15.50           | 54             | 38.50       |


#### ※ Remark

Actual = Reading + Ant. Factor + Amp + CL (Cable loss)

**Restrict band (4 500 – 5 150 MHz)**

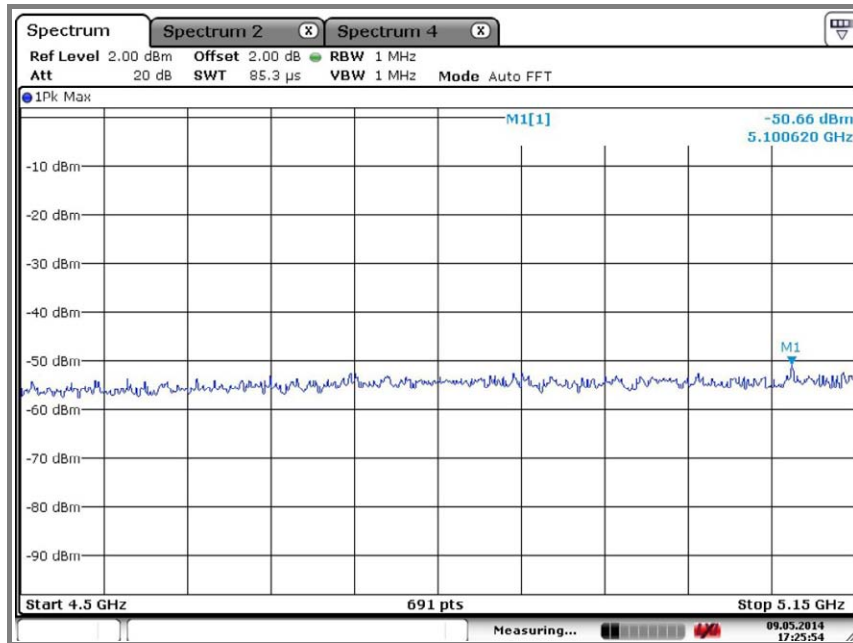

**Restrict band (5 350 – 5 460 MHz)**

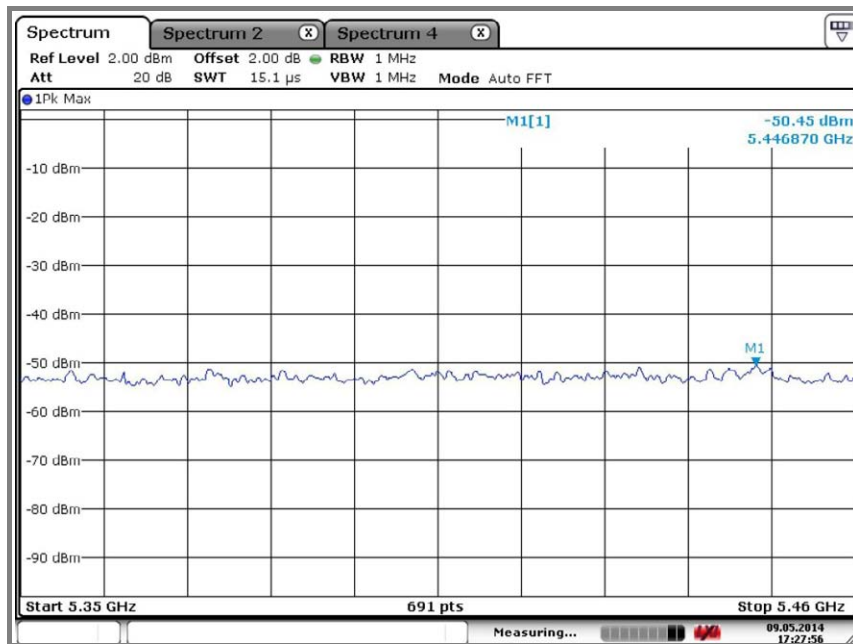


#### 4.4.5. Spurious RF conducted emissions: Plot of spurious RF conducted emission


Operation mode: Normal mode

##### A. Low channel (5 180 MHz)


Unwanted Emission data

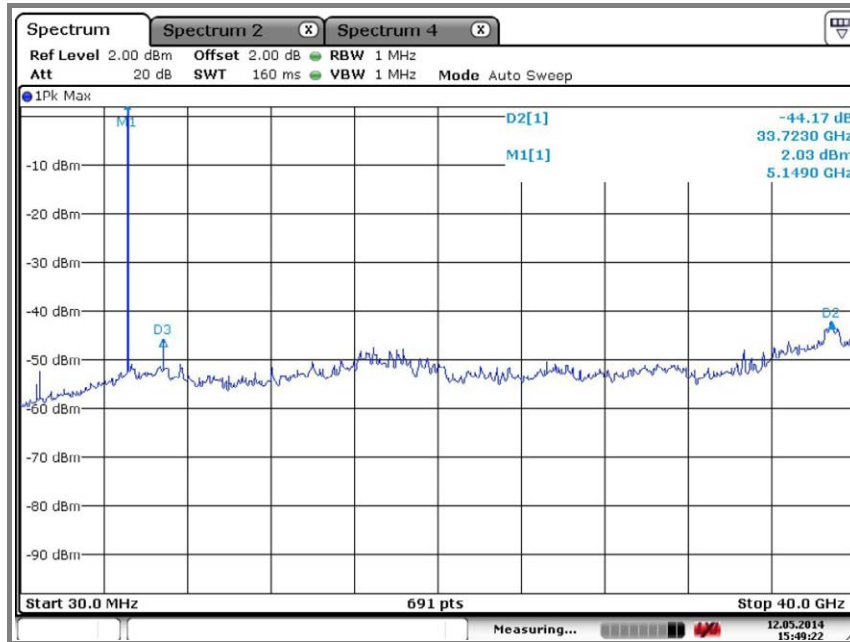


Band-edge data

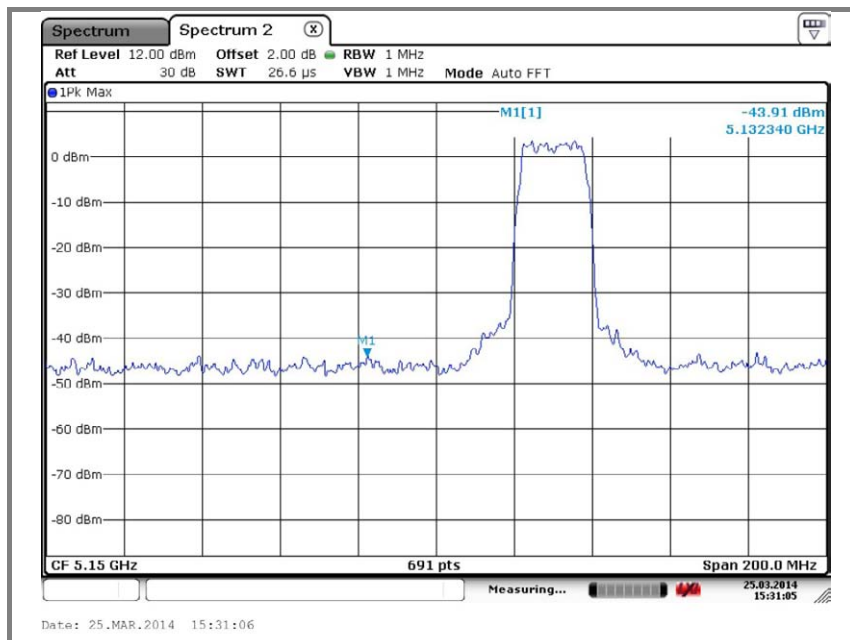


## B. Middle channel (5 220 MHz)

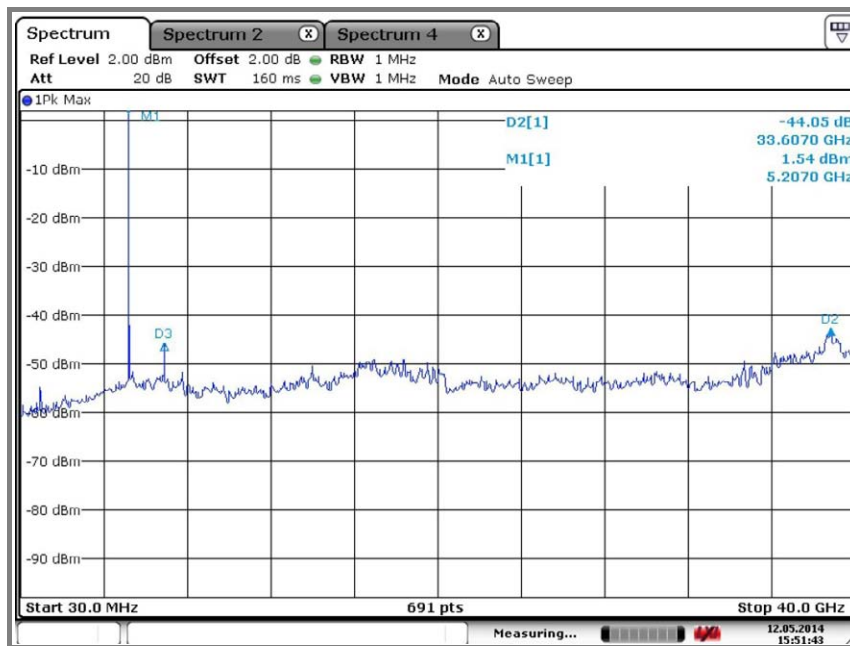

### C. High channel (5 240 MHz)

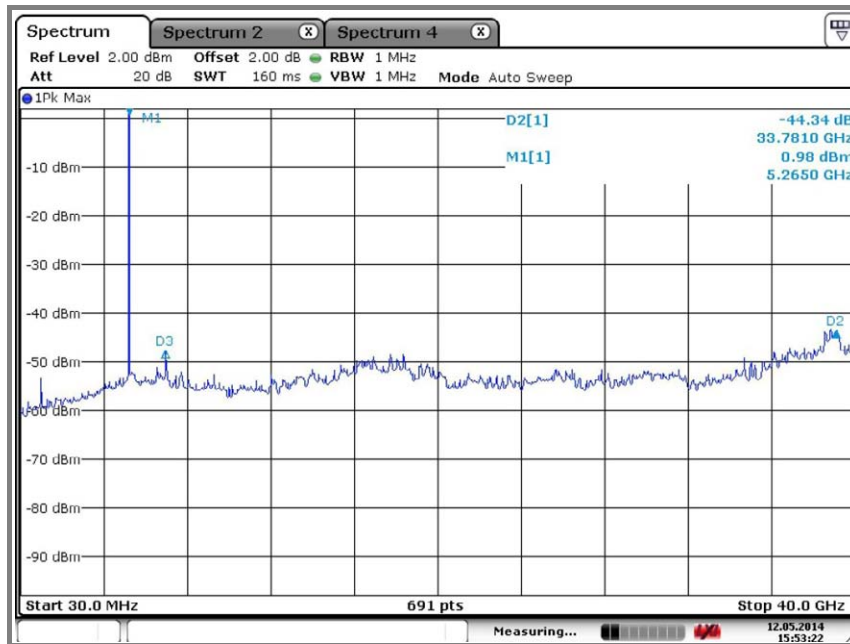


### Band-edge data

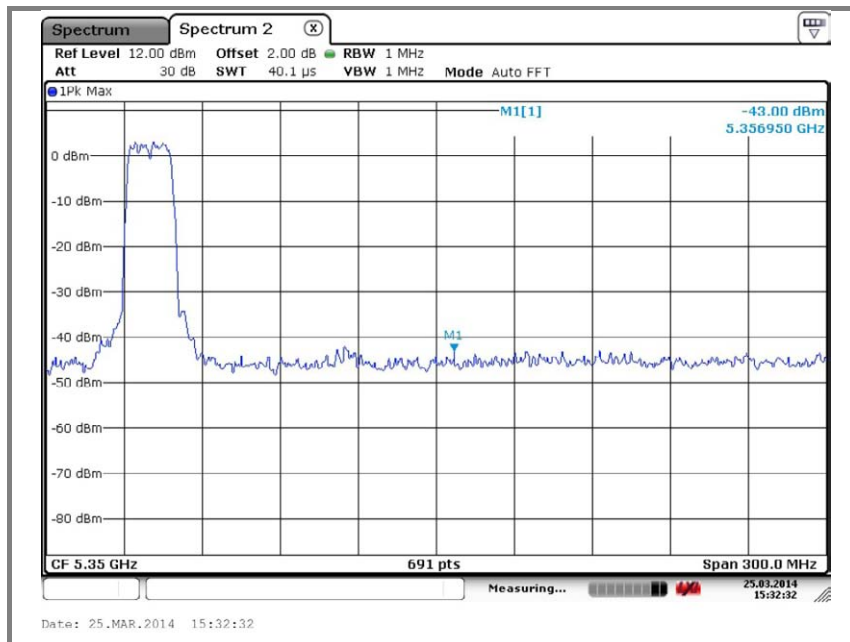


Operation mode: N\_20MHz mode

A. Low channel (5 180 MHz)


Unwanted Emission data

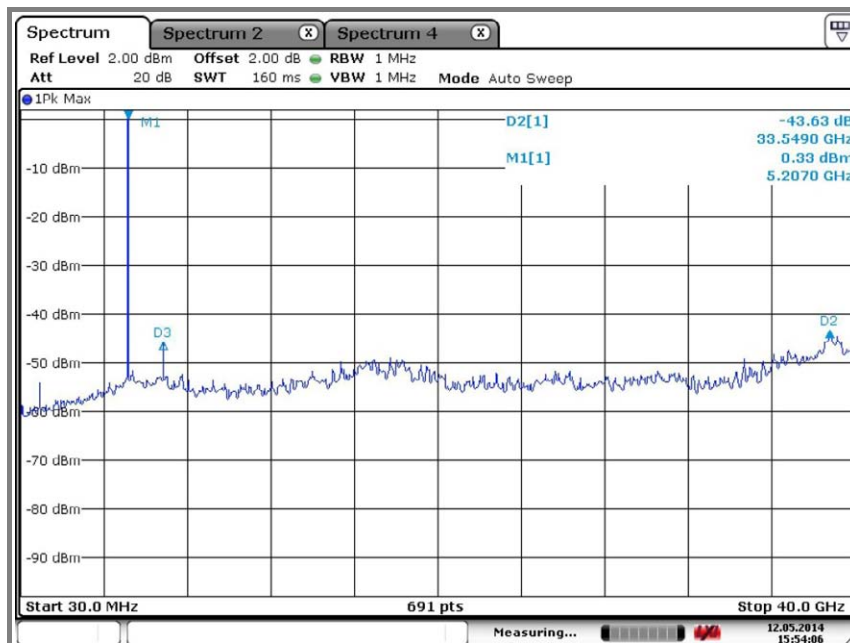


Band-edge data

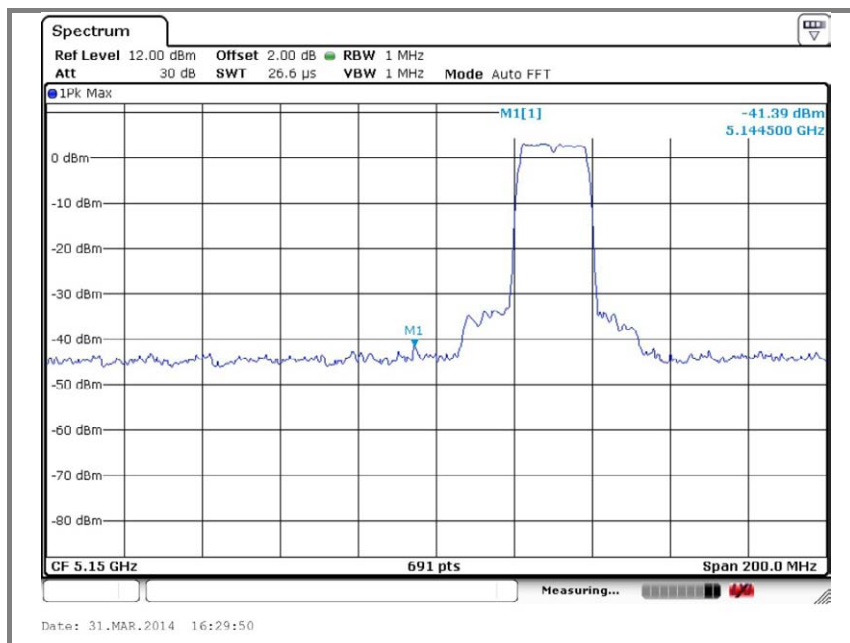


## B. Middle channel (5 220 MHz)

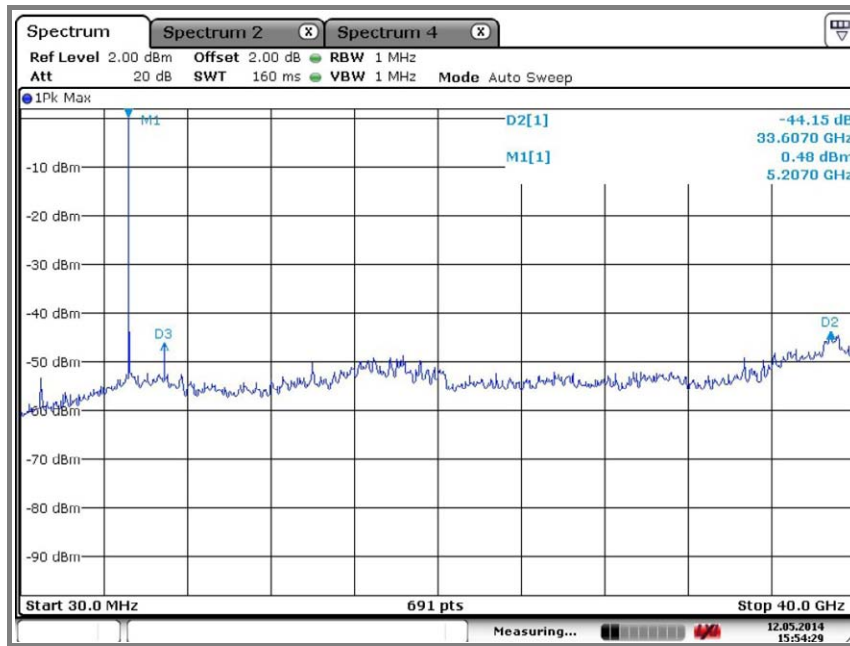

### C. High channel (5 240 MHz)

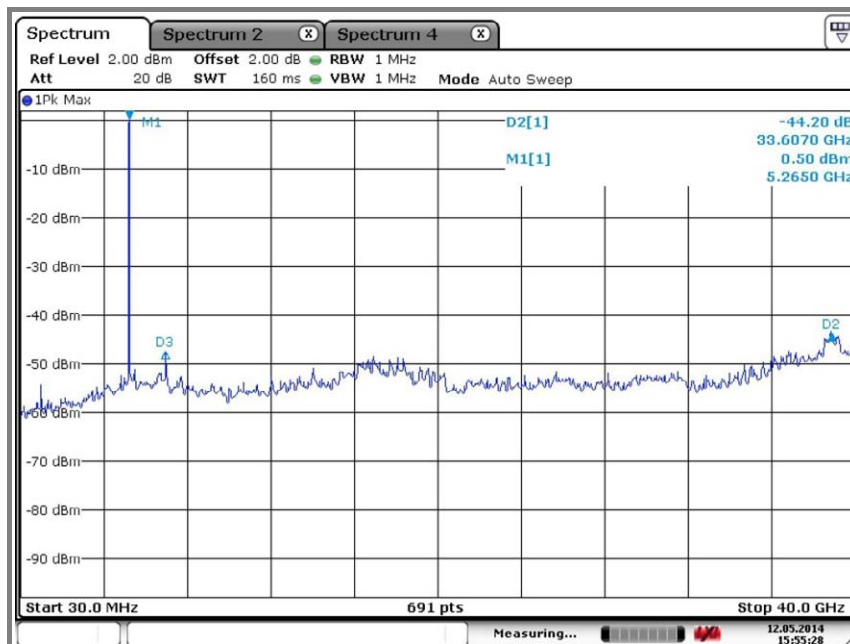


### Band-edge data

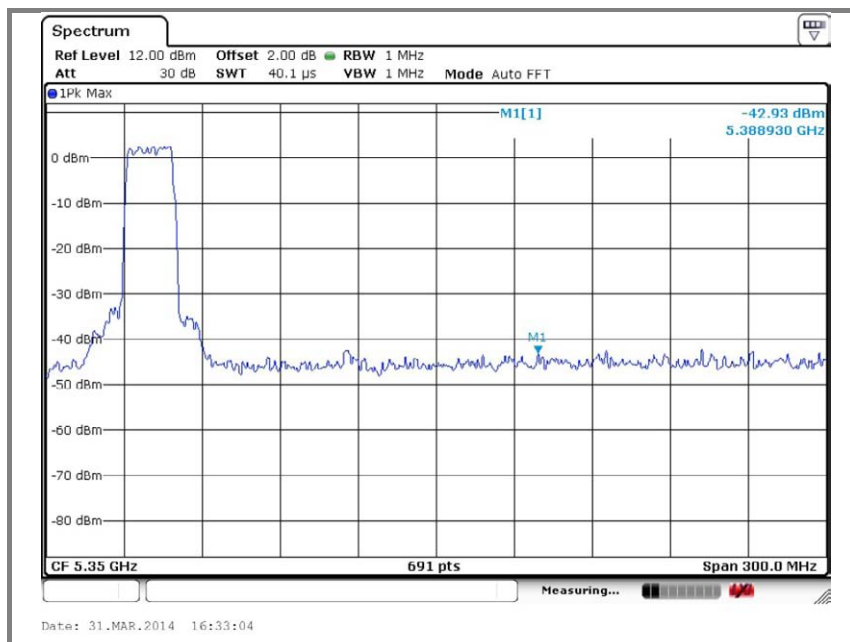

## 5. 26 dB bandwidth

### 5.1. Test setup

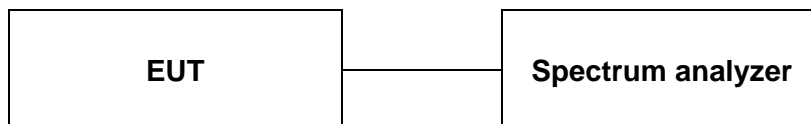

### 5.2. Limit

Not applicable

### 5.3. Test procedure (KDB 789033 v01r03 – Section C)

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set the spectrum analyzer as,  
 RBW = approximately 1% of the emission bandwidth  
 VBW > RBW  
 Detector = Peak  
 Trace mode = max hold
3. Repeat until all the rest channels are investigated.

### 5.4. Test results


Ambient temperature: 23 °C

Relative humidity: 43 % R.H.


| Mode    | Frequency(MHz) | 26 dB bandwidth(MHz) |
|---------|----------------|----------------------|
| Normal  | 5 180          | 19.49                |
|         | 5 220          | 19.58                |
|         | 5 240          | 19.58                |
| N_20MHz | 5 180          | 20.10                |
|         | 5 220          | 20.19                |
|         | 5 240          | 20.23                |

Operation mode: Normal mode


### A. Low channel (5 180 MHz)

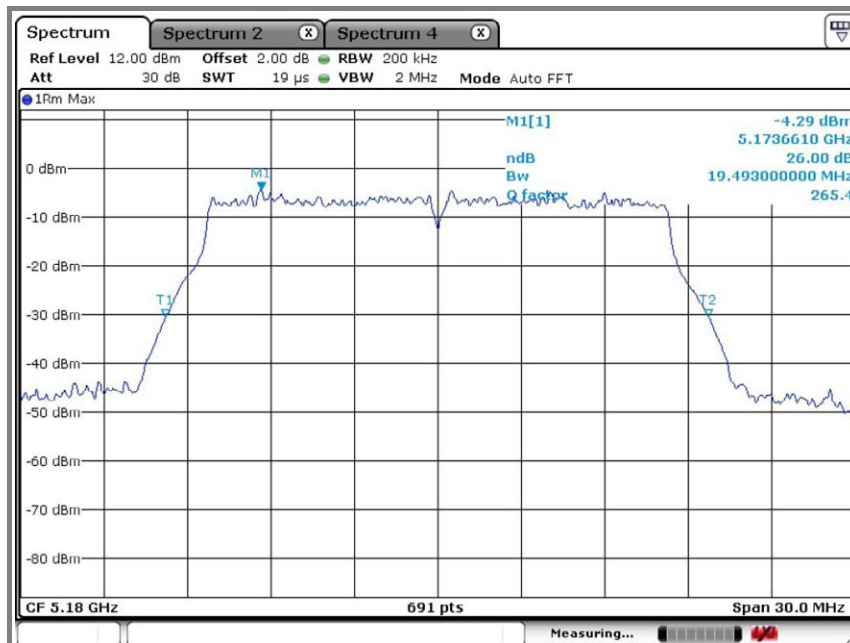

### B. Middle channel (5 220 MHz)

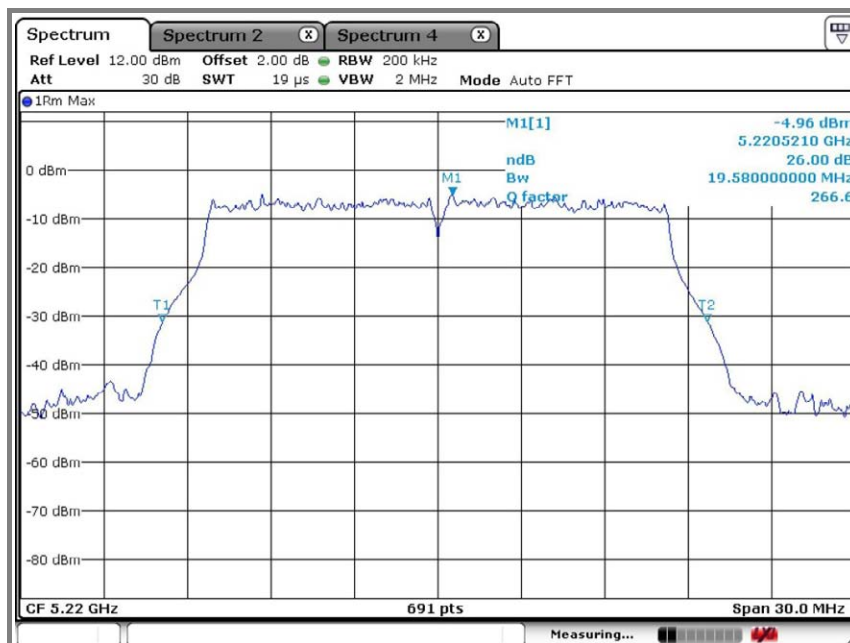


### C. High channel (5 240 MHz)

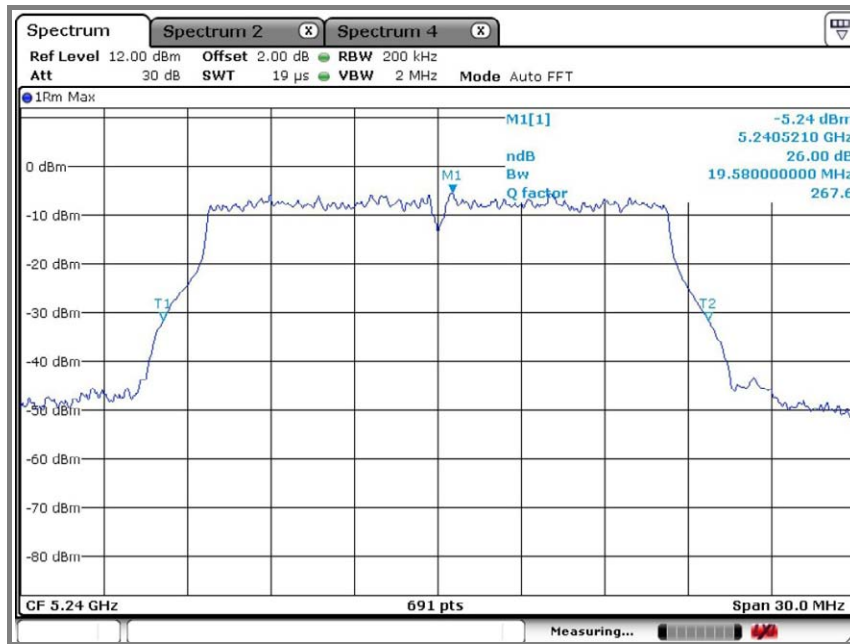


Operation mode: N\_20MHz mode


### A. Low channel (5 180 MHz)

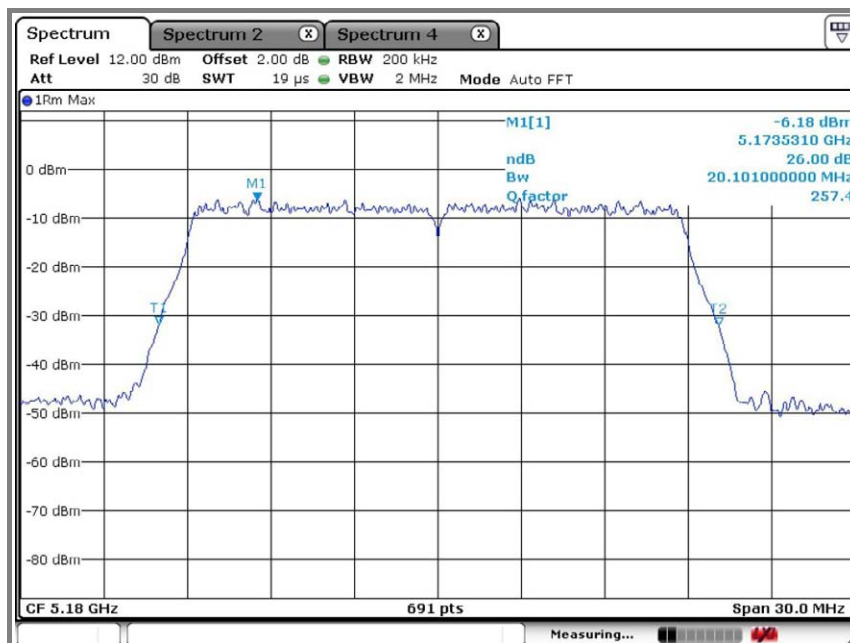

## B. Middle channel (5 220 MHz)

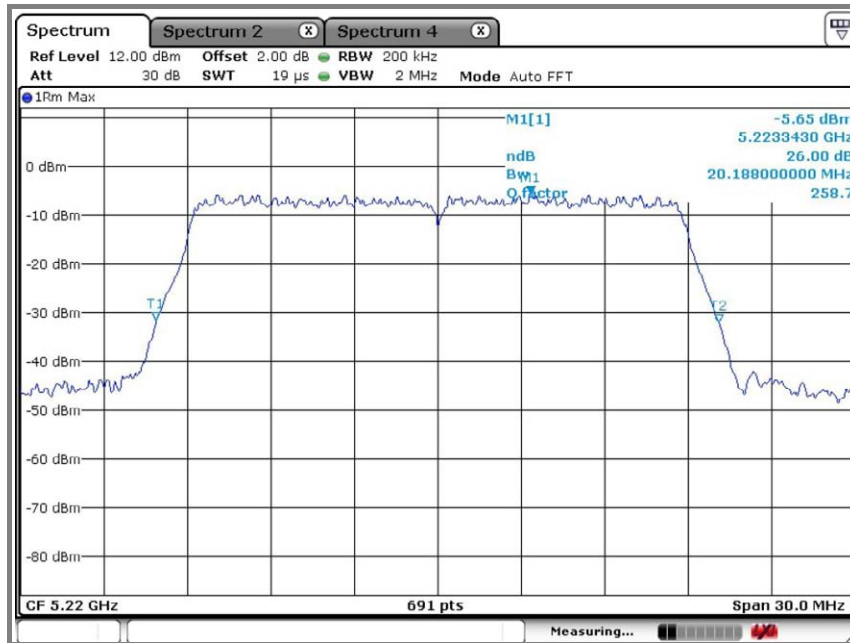


## C. High channel (5 240 MHz)

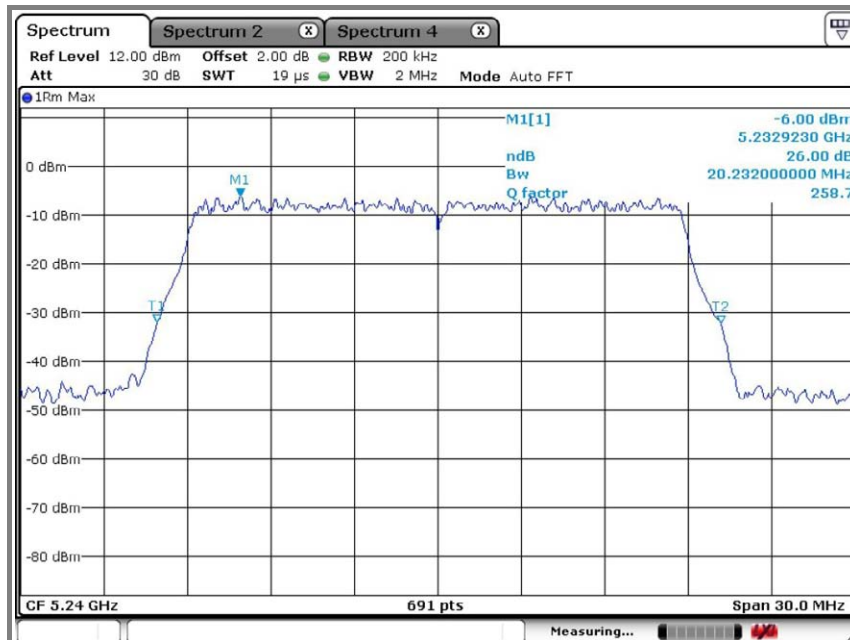

## 6. Output power

### 6.1. Test setup.

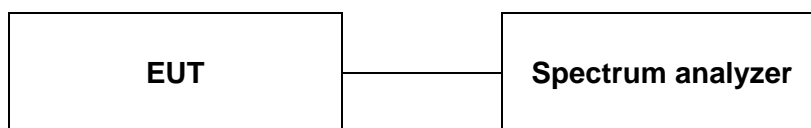

### 6.2. Limit

For the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 6.3. Test procedure (KDB 789033 v01r03 – Section E-b)

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the Spectrum analyzer as RBW = 1 MHz, VBW ≥ 3 MHz, Span = Auto, Channel BW = 26 dB bandwidth, Number of points in sweep ≥ 2 span / RBW, Detector = RMS(power averaging)

### 6.4. Test results

Ambient temperature: 23 °C  
Relative humidity: 43 % R.H.

#### Limit


| Mode    | Frequency (MHz) | Fixed Limit (dB m) | B (MHz) | 4+10LogB (dB m) | Antenna gain (dB i) | Limit (dB) |
|---------|-----------------|--------------------|---------|-----------------|---------------------|------------|
| Normal  | 5 180           | 17                 | 19.49   | 16.90           | 3.952               | 17         |
|         | 5 220           | 17                 | 19.58   | 16.92           |                     |            |
|         | 5 240           | 17                 | 19.58   | 16.92           |                     |            |
| N_20MHz | 5 180           | 17                 | 20.10   | 17.03           |                     | 17         |
|         | 5 220           | 17                 | 20.19   | 17.05           |                     |            |
|         | 5 240           | 17                 | 20.23   | 17.06           |                     |            |

#### Result


| Mode    | Frequency (MHz) | Output power (dB m) | Limit (dBm) |
|---------|-----------------|---------------------|-------------|
| Normal  | 5 180           | 10.89               | 17          |
|         | 5 220           | 10.89               |             |
|         | 5 240           | 10.73               |             |
| N_20MHz | 5 180           | 10.03               |             |
|         | 5 220           | 10.28               |             |
|         | 5 240           | 10.08               |             |

Operation mode: Normal mode


#### A. Low channel (5 180 MHz)

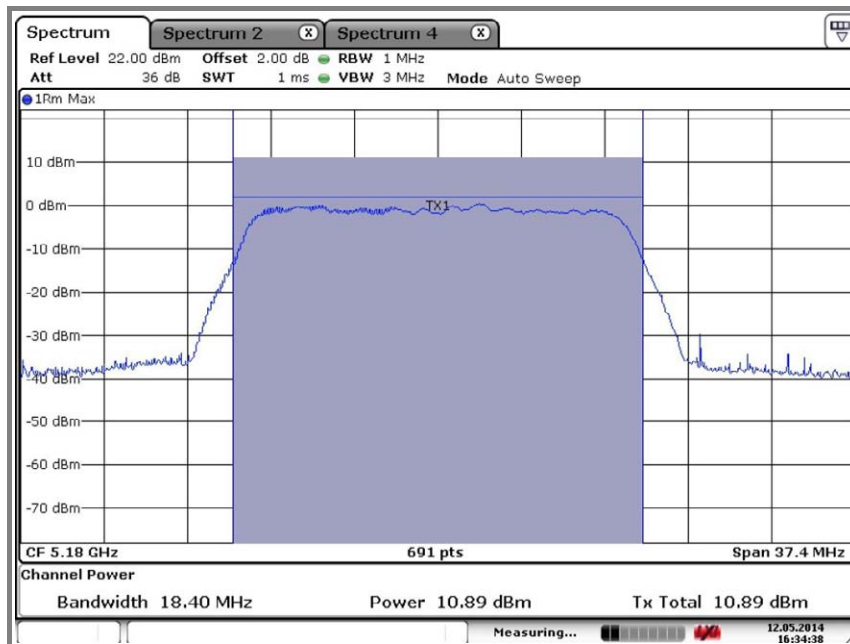

#### B. Middle channel (5 220 MHz)

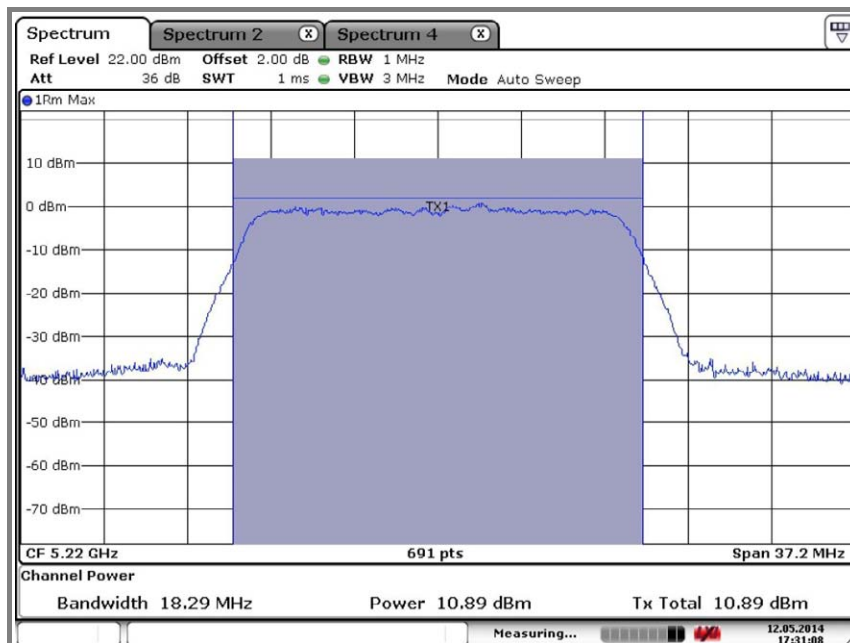


### C. High channel (5 240 MHz)

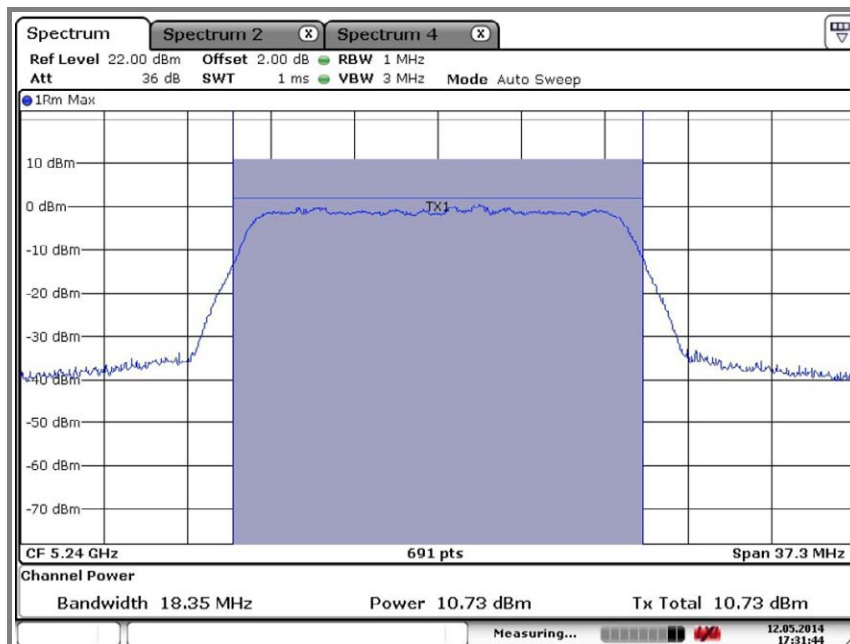


Operation mode: N\_20MHz mode


### A. Low channel (5 180 MHz)

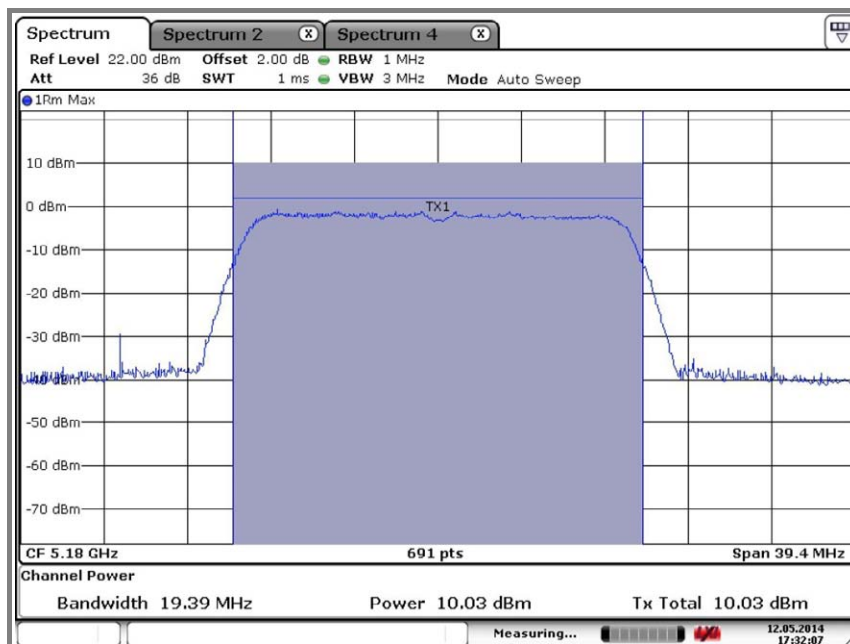

## B. Middle channel (5 220 MHz)

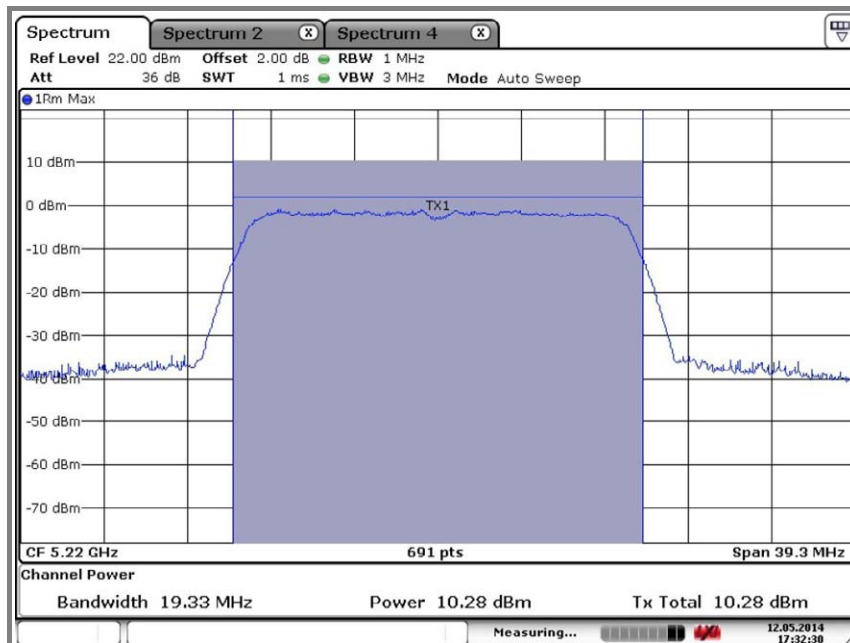


## C. High channel (5 240 MHz)

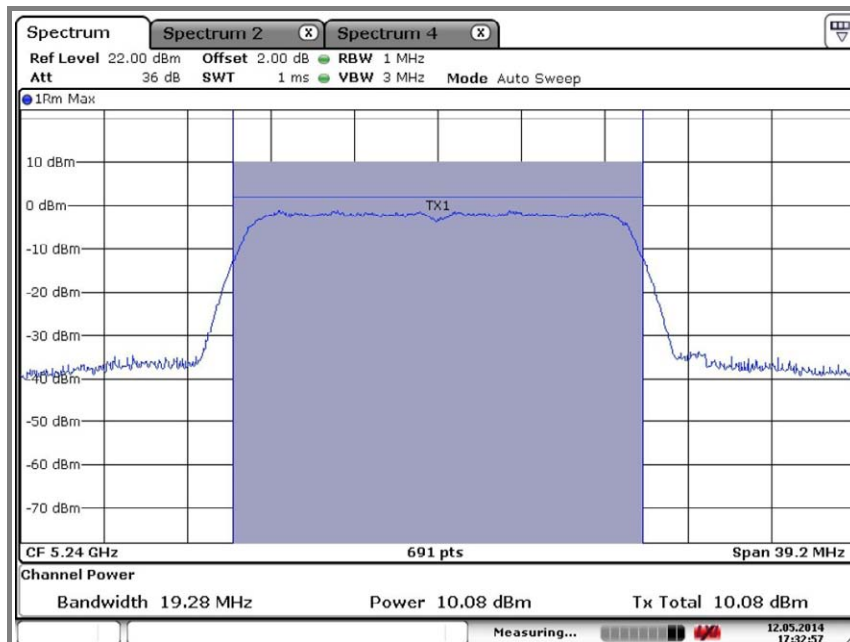

## 7. Peak power spectral density

### 7.1. Test setup

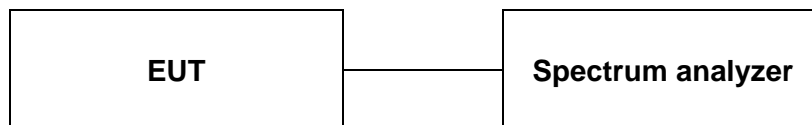

### 7.2. Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operation at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies, Method SA-1, as defined in KDB 789033 v01r03, was used to measure the power spectral density.

In the 5 150- 5 250 MHz band, the maximum permissible power spectral density is 4 dBm / MHz

### 7.3. Test procedure (KDB 789033 v01r03 – Section F)

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
2. RBW = 1 MHz, VBW = 3 MHz
3. Number of sweep points > 2 x (span/RBW)
4. Sweep time = auto
5. Detector = power averaging (RMS)
6. Trigger was set to free run since the EUT was operating at a duty cycle > 98%
7. Trace was averaged over 100 sweeps
8. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.


### 7.4. Test results

Ambient temperature: 23 °C  
Relative humidity: 43 % R.H.


| Mode    | Frequency (MHz) | PPSD (dBm) | Limit (dB m) |
|---------|-----------------|------------|--------------|
| Normal  | 5 180           | 2.81       | 4            |
|         | 5 220           | 2.47       |              |
|         | 5 240           | 2.65       |              |
| N_20MHz | 5 180           | 1.56       | 4            |
|         | 5 220           | 1.69       |              |
|         | 5 240           | 1.69       |              |

Operation mode: Normal mode


#### A. Low channel (5 180 MHz)

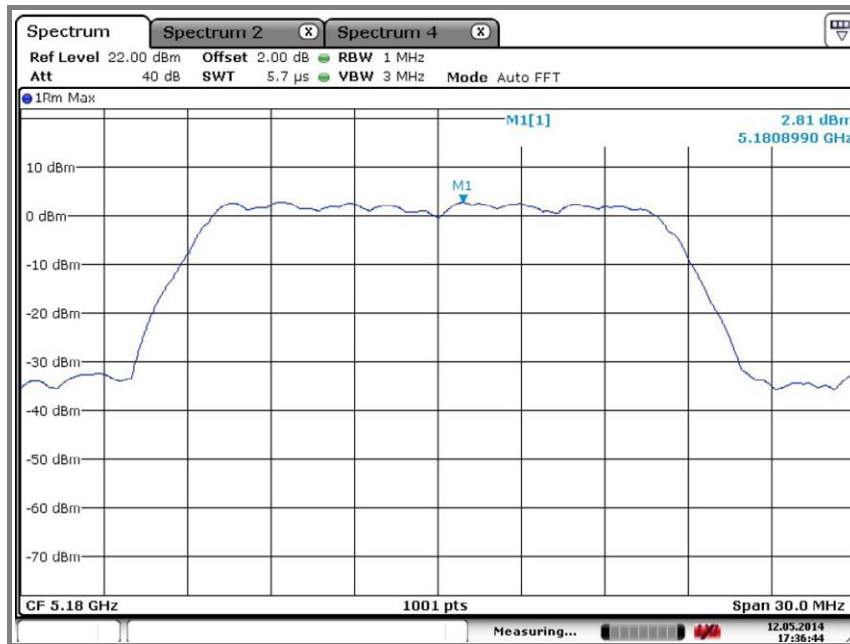

#### B. Middle channel (5 220 MHz)

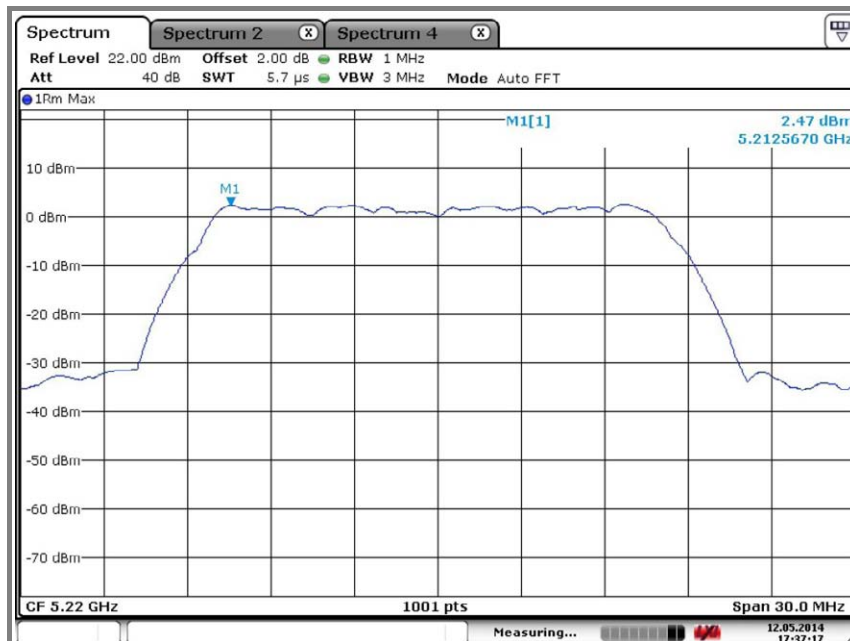


### C. High channel (5 240 MHz)

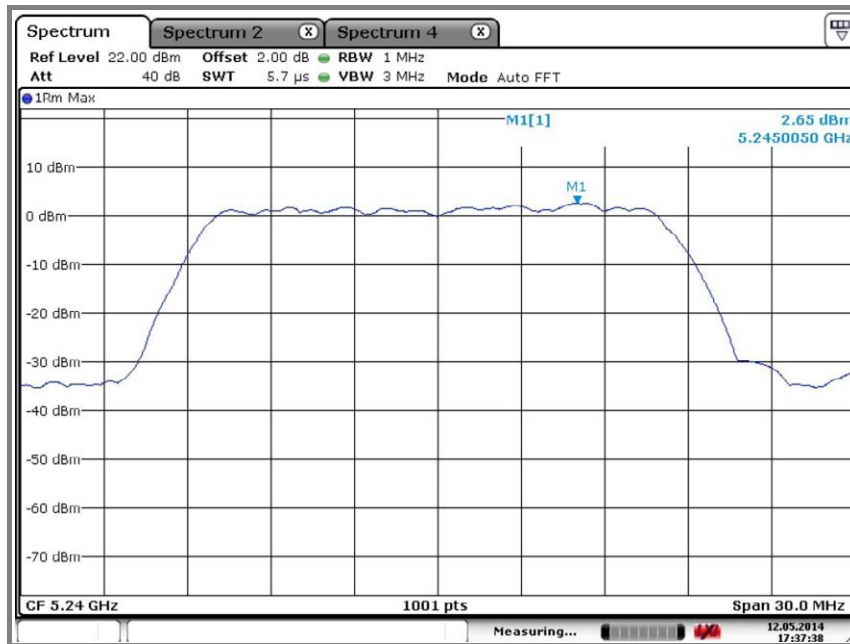


Operation mode: N\_20MHz mode

### A. Low channel (5 180 MHz)

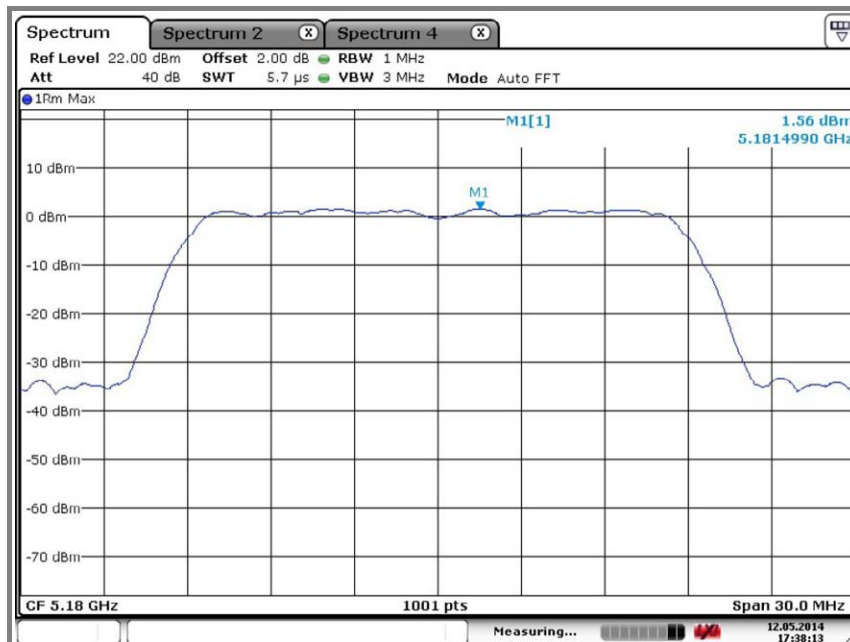

## B. Middle channel (5 220 MHz)

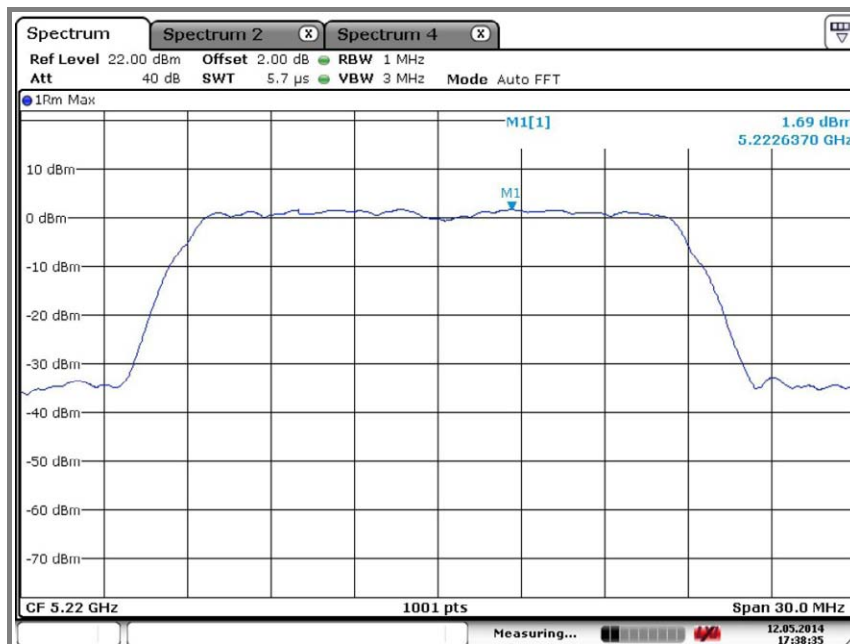

## C. High channel (5 240 MHz)



## 8. Peak excursion

### 8.1. Test setup



### 8.2. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less. The maximum antenna

### 8.3. Test procedure

- Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna the port to the Spectrum analyzer
- Set spectrum analyzer as ;  
RBW = 1 MHz, VBW = 3 MHz, Span = 30 MHz, Detector mode: average, Trace 1: Max hold & View
- Set spectrum analyzer as ;  
RBW = 1 MHz, VBW = 300kHz, Span = 30 MHz, Detector mode: peak, Trace 2: Max hold
- Record the max reading.
- Repeat the above procedure until the measurements for all frequencies are completed.

### 8.4. Test results


Ambient temperature: 23 °C

Relative humidity: 43 % R.H.


| Mode    | Frequency (MHz) | Peak excursion (dB) | Limit (dB) |
|---------|-----------------|---------------------|------------|
| Normal  | 5 180           | 2.74                | 13         |
|         | 5 220           | 2.37                |            |
|         | 5 240           | 2.37                |            |
| N_20MHz | 5 180           | 2.31                | 13         |
|         | 5 220           | 2.51                |            |
|         | 5 240           | 2.09                |            |

Operation mode: Normal mode


### A. Low channel (5 180 MHz)

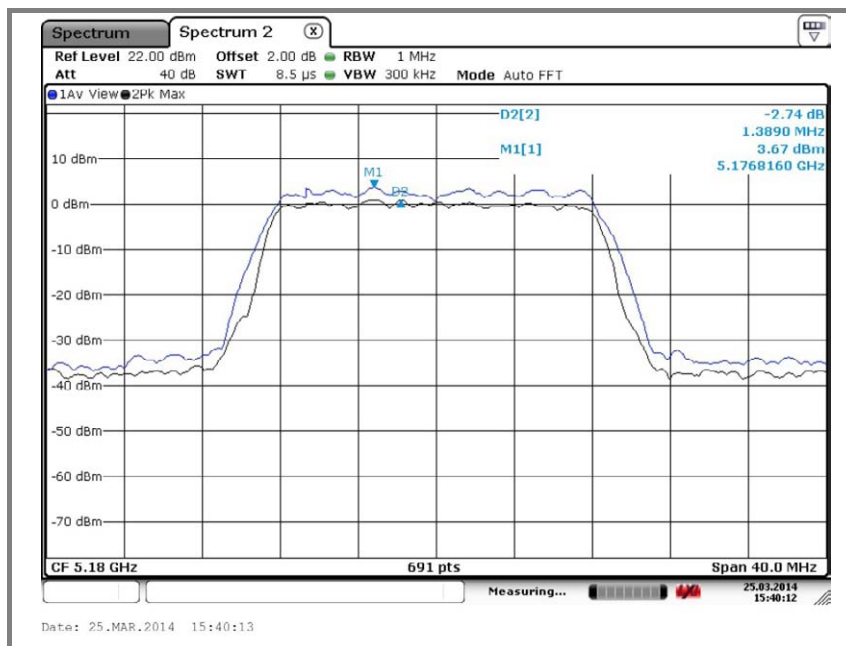

### B. Middle channel (5 220 MHz)

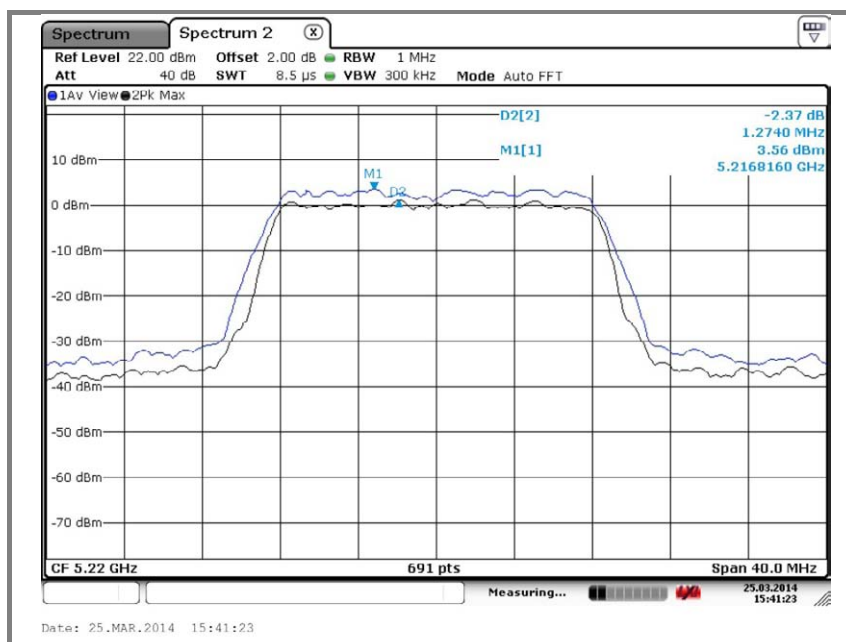


### C. High channel (5 240 MHz)

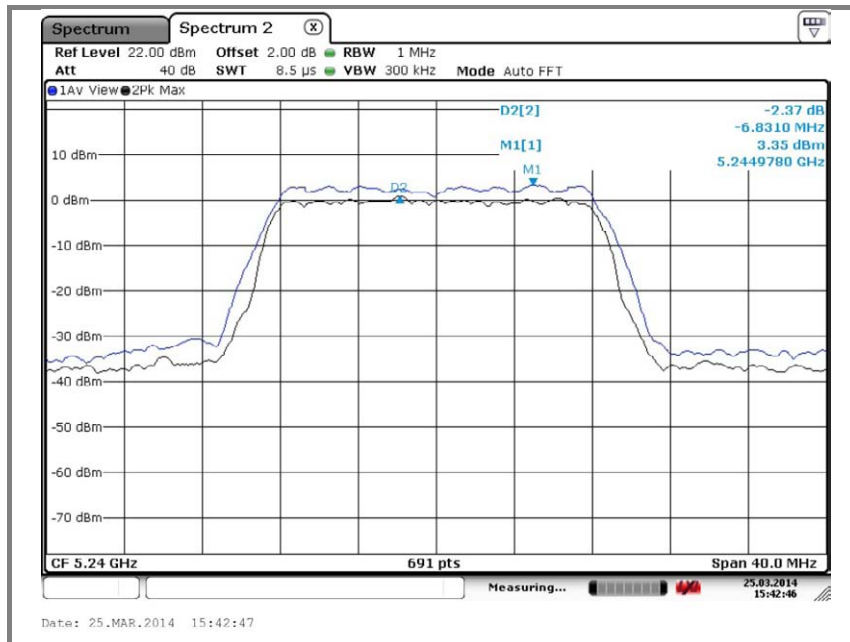


### Operation mode: N\_20MHz mode


### A. Low channel (5 180 MHz)

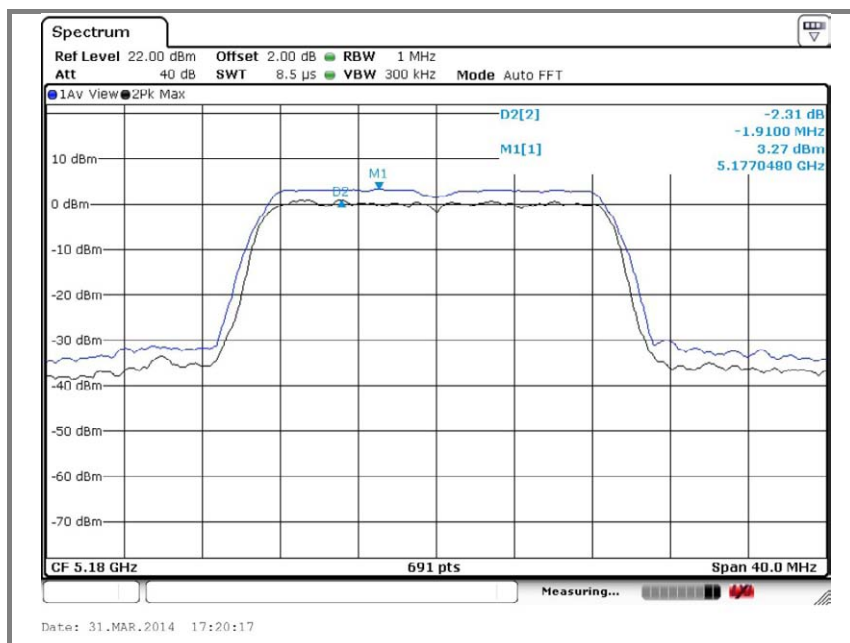

### B. Middle channel (5 220 MHz)

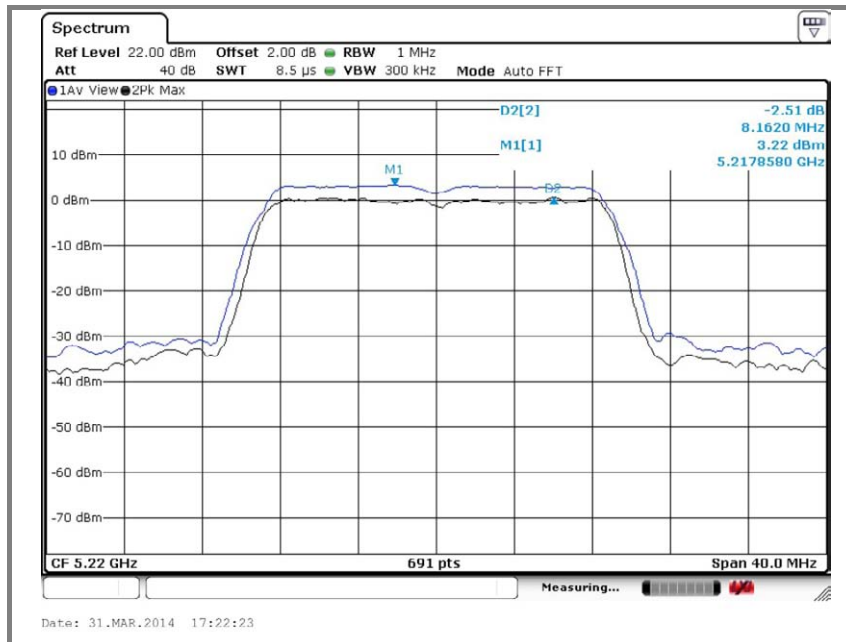


### C. High channel (5 240 MHz)

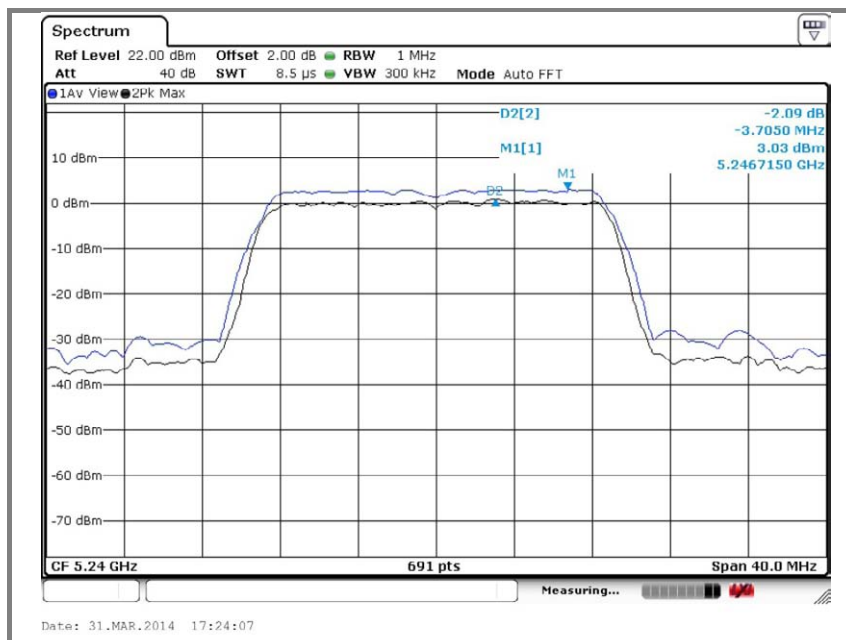

## 9. Frequency stability

### 9.1. Test setup

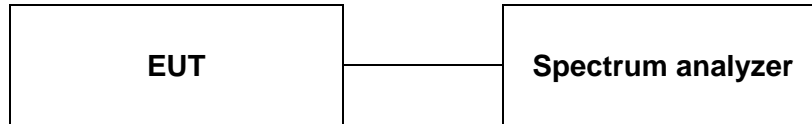

### 9.2. Limit

Not applicable

### 9.3. Test procedure

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from  $-20^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  using an environmental chamber.
- b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the Spectrum analyzer as  $\text{RBW} = 10\text{kHz}$ ,  $\text{VBW} = 10\text{kHz}$ , Sweep time = Auto

## 9.4. Test results

Operation mode: Normal mode

Operation Frequency : 5 240 MHz (Worst case)

| VOLTAGE (%) | POWER (VDC) | TEMP (dB) | FREQ (Hz)     | Deviation (%) |
|-------------|-------------|-----------|---------------|---------------|
| 100%        | 24.00       | +20(Ref)  | 5 240 010 857 | 0.000207      |
| 100%        |             | -20       | 5 240 011 519 | 0.000220      |
| 100%        |             | -10       | 5 240 012 883 | 0.000246      |
| 100%        |             | 0         | 5 240 010 694 | 0.000204      |
| 100%        |             | +10       | 5 240 012 711 | 0.000243      |
| 100%        |             | +20       | 5 240 010 303 | 0.000197      |
| 100%        |             | +25       | 5 240 009 548 | 0.000182      |
| 100%        |             | +30       | 5 240 011 398 | 0.000218      |
| 100%        |             | +40       | 5 240 010 642 | 0.000203      |
| 100%        |             | +50       | 5 240 010 895 | 0.000208      |
| 100%        |             | +60       | 5 240 011 667 | 0.000223      |
| 85%         | 20.40       | +20       | 5 240 011 454 | 0.000219      |
| 115%        | 27.60       | +20       | 5 240 012 026 | 0.000230      |

Operation mode: N\_20MHz mode

Operation Frequency : 5 240 MHz (Worst case)

| VOLTAGE (%) | POWER (VDC) | TEMP (dB) | FREQ (Hz)     | Deviation (%) |
|-------------|-------------|-----------|---------------|---------------|
| 100%        | 24.00       | +20(Ref)  | 5 240 011 428 | 0.000218      |
| 100%        |             | -20       | 5 240 011 366 | 0.000217      |
| 100%        |             | -10       | 5 240 011 184 | 0.000213      |
| 100%        |             | 0         | 5 240 011 152 | 0.000213      |
| 100%        |             | +10       | 5 240 012 596 | 0.000240      |
| 100%        |             | +20       | 5 240 012 453 | 0.000238      |
| 100%        |             | +25       | 5 240 012 096 | 0.000231      |
| 100%        |             | +30       | 5 240 012 772 | 0.000244      |
| 100%        |             | +40       | 5 240 012 348 | 0.000236      |
| 100%        |             | +50       | 5 240 011 692 | 0.000223      |
| 100%        |             | +60       | 5 240 012 353 | 0.000236      |
| 85%         | 20.40       | +20       | 5 240 012 786 | 0.000244      |
| 115%        | 27.60       | +20       | 5 240 012 597 | 0.000240      |

## **10. Antenna requirement**

### **10.1. Standard Applicable**

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **10.2. Antenna Connected Construction**

Antenna used in this product is Internal antenna (PCB Antenna) gain of 3.952 dBi.

## 11. RF exposure evaluation

### 11.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to KDB 447498 (2)(a)(i)

#### Limits for maximum permissible exposure (MPE)

| Frequency range (MHz)                                   | Electric field strength(V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Average time |
|---|------------------------------|-------------------------------|-------------------------------------|--------------|
| (A) Limits for Occupational / Control exposures         |                              |                               |                                     |              |
| 300 – 1 500   | --                           | --                            | F/300                               | 6            |
| 1 500 – 100 000   | --                           | --                            | 5                                   | 6            |
| (B) Limits for General Population / Uncontrol Exposures |                              |                               |                                     |              |
| 300 – 1 500   | --                           | --                            | F/1 500                             | 6            |
| <u>1 500 – 100 000</u>                                  | --                           | --                            | <u>1</u>                            | <u>30</u>    |

### 11.2. Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

$P_d$ = Power density in mW/cm<sup>2</sup>

$P_{out}$ =output power to antenna in mW

$G$ = Numeric gain of the antenna relative to isotropic antenna

$\pi$ =3.1416

$R$ = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1 mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

## 11.2. Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

## 11.3. Output power into antenna & RF exposure evaluation distance

| Mode    | Frequency (MHz) | Output Peak power to antenna (dBm) | Antenna gain (dBi) | Antenna Gain (dBi) Numeric | Power density at 20 cm (mW/cm <sup>2</sup> ) | Power density Limits (mW/cm <sup>2</sup> ) |
|---------|-----------------|------------------------------------|--------------------|----------------------------|--|--|
| Normal  | 5 180           | 10.89                              | 3.952              | 2.48                       | 0.006 1                                      | 1  |
|         | 5 220           | 10.89                              | 3.952              | 2.48                       | 0.006 1                                      |  |
|         | 5 240           | 10.73                              | 3.952              | 2.48                       | 0.005 8                                      |  |
| N_20MHz | 5 180           | 10.03                              | 3.952              | 2.48                       | 0.005 0                                      | 1  |
|         | 5 220           | 10.28                              | 3.952              | 2.48                       | 0.005 3                                      |  |
|         | 5 240           | 10.08                              | 3.952              | 2.48                       | 0.005 0                                      |  |

### ※ Remark


The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup> .

## 12. Test setup photo of EUT

**Photo of radiated spurious emission at below 30 MHz**



**Photo of radiated spurious emission at 30 MHz ~ 1 000 MHz**

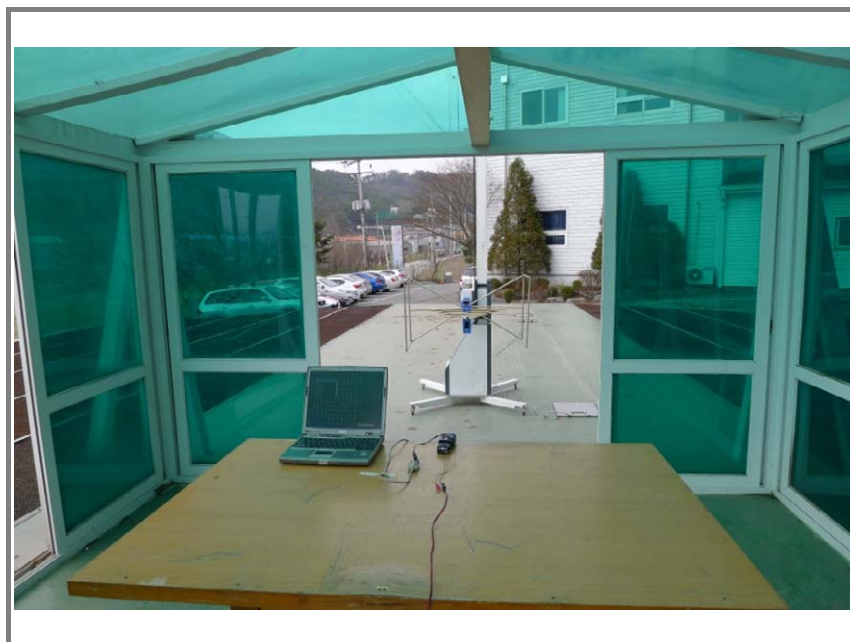

**Photo of radiated spurious emission at above 1 000 MHz**

