

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

APPLICANT: TECHNOLOGIES TO BE INC.

FCC ID: TMKMSU102

## TABLE OF CONTENTS

### TEST REPORT CONTAINING:

PAGE	1.....	TEST EQUIPMENT LIST
PAGE	2.....	TEST PROCEDURE
PAGE	3.....	GENERAL INFORMATION & DATA
PAGE	4.....	POWER OUTPUT
PAGE	5-6.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE	7.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	8.....	CHANNEL SPACING PLOT
PAGE	9.....	20 dB BANDWIDTH OF A HOPPING CHANNEL
PAGE	10.....	DWELL TIME PLOT
PAGE	11.....	BANDEDGE PLOT
PAGE	12.....	NUMBER OF HOPPING CHANNELS

### EXHIBIT ATTACHMENTS:

REQUEST FOR CONFIDENTIALITY LETTER  
FCC ID LABEL SAMPLE  
SKETCH OF FCC ID LABEL LOCATION  
BLOCK DIAGRAM  
SCHEMATIC  
EXTERNAL PHOTOGRAPHS  
INTERNAL PHOTOGRAPHS  
USERS MANUAL  
CIRCUIT DESCRIPTION  
PARTS LIST  
TEST SETUP PHOTOGRAPH

APPLICANT: TECHNOLOGIES TO BE INC.

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
Biconnical Antenna	Eaton	94455-1	1057	CAL 12/12/05	12/12/07
Biconnical Antenna	Eaton	94455-1	1096	CAL 8/17/04	8/17/06
Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/13/05	4/13/07
Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 9/5/05	9/5/07
Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/13/05	4/13/07
LISN	Electro-Metrics	ANS-25/2	2604	CAL 8/27/04	8/27/06
LISN	Electro-Metrics	EM-7820	2682	CAL 4/28/05	4/28/07
Log-Periodic Antenna	Eaton	96005	1243	CAL 12/14/05	12/14/07

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. Shielded interface cables were used in all cases except for cables connecting to the power cords. A test program was run which simulated a normal data transmission on a network.

BANDWIDTH 6 dB: The measurements were made with the spectrum analyzer's resolution bandwidth(RBW)=1.0MHz and the video bandwidth(VBW) =3.0MHz and the span set as shown on plot.

POWER OUTPUT: The RF power output was measured at the antenna feed point using a peak power meter.

ANTENNA CONDUCTED EMISSIONS: The RBW=100 kHz, VBW=300 kHz and the span set to 10.0MHz and the spectrum was scanned from 30MHz to the 10th Harmonic of the fundamental. Above 1.0GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2003 using a Agilent spectrum analyzer with a preselector. The bandwidth(RBW) of the spectrum analyzer was 100 kHz up to 1 GHz and 1.0 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 86°F with a humidity of 63%.

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## INTRODUCTION:

### PRODUCT DESCRIPTION:

This device is a frequency hopping transceiver that operates in the 902-928 MHz band. The unit is fixed mounted and uses only one antenna type. The antenna used is a 3dB omni directional.

## GENERAL INFORMATION AND DATA

- 15.247 (a): Definition: This EUT uses a pseudo random algorithm to hop over the frequency range of 902.00 to 928.00 MHz in 46 hops.
- 15.247 (a)(1): The number of hops is 51 hops at a separation of 75 kHz, the requirement in the 902-928 MHz band is a minimum of 50 hops.
- 15.247 (a)(1)(i): Dwell Time of Hop: The dwell time of any hopping frequency cannot be greater than 0.4 seconds in any 20 second period. The dwell time of a channel is 307 milliseconds.
- 15.247 (b)(3): The antenna's gain is 3 dB. The device uses a permanently  
15.203 attached antenna. The device is professionally installed.
- 15.247 (a)(1)(i): The maximum allowed 20 dB bandwidth of a hopping channel is 500 kHz. The 20 dB bandwidth measured was 8 kHz.
- 15.247 (4)(c): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

APPLICANT: Technologies to be, Incorporated  
FCC ID: TMKMSU102  
REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>


888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 15.247(b)(2): POWER OUTPUT

The maximum peak output power shall not exceed 1 watt (30 dBm). If directional transmitting antennas with a gain of more than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum power output was less than +30 dBm. Power was measured by disconnecting the antennas and measuring across a 50 ohm load as recommended by the manufacturer using a HP peak power meter Model 8900C. The antenna is non directional and did not exceed 6 dBi gain. The power output was measured at three places in the band. Highest is reported below.

### MEASUREMENT:

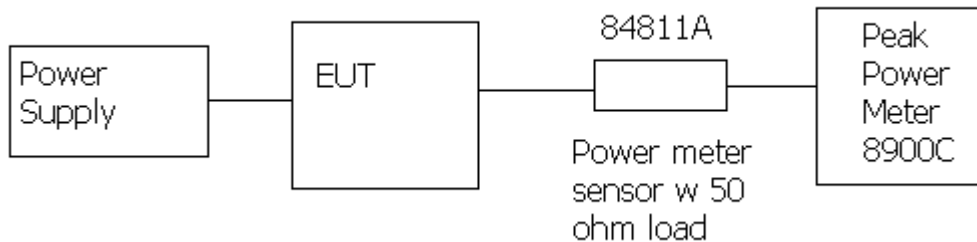

POWER OUTPUT: 39 mW (0.039 Watts) meets the FCC requirements.

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

**APPLICANT:** Technologies to be, Incorporated

**FCC ID:** TMKMSU102

**NAME OF TEST:** RADIATION INTERFERENCE

**RULES PART NO.:** 15.247, 15.209

FIELD STRENGTH	FIELD STRENGTH	S15.209
of Fundamental:	of Harmonics	30 - 88 MHz 40 dBuV/m @3M
902-928MHz		88 - 216 MHz 43.5
2.4-2.4835GHz		216 - 960 MHz 46
127.38dBuV/m @3m	54 dBuV/m @3m	ABOVE 960 MHz 54dBuV/m

Emissions that fall in the restricted bands (15.205) must be less than or equal to 500 uV/m (54 dBuV/m). Spurious not in a restricted band must be 20 dBc.

## TEST DATA:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
903.0	903.00	84.8	H	1.95	23.33	110.08	17.30
903.0	903.00	86.5	V	1.95	22.67	111.12	16.26
903.0	1,806.00	22.1	V	2.74	30.04	54.88	36.24
903.0	1,806.00	23.1	H	2.74	30.04	55.88	35.24
903.0	2,709.00	13.9	V	3.40	32.85	50.15	3.85
903.0	2,709.00	16.5	H	3.40	32.85	52.75	1.25
903.0	3,612.00	9.4	V	4.15	33.39	46.94	7.06
903.0	3,612.00	11.7	H	4.15	33.39	49.24	4.76
903.0	4,515.00	8.2	V	4.76	34.11	47.07	6.93
903.0	4,515.00	10.5	H	4.76	34.11	49.37	4.63
903.0	8,127.00	11.3	H	6.25	36.30	53.85	0.05
905.2	905.20	80.8	H	1.96	23.35	106.11	21.27
905.2	905.20	85.4	V	1.96	22.65	110.01	17.37
905.2	1,810.40	22.1	H	2.75	30.06	54.91	35.10
905.2	1,810.40	22.9	V	2.75	30.06	55.71	34.30
905.2	2,715.60	14.4	V	3.40	32.86	50.66	3.34
905.2	2,715.60	16.0	H	3.40	32.86	52.26	1.74
905.2	3,620.80	9.1	V	4.16	33.40	46.66	7.34
905.2	3,620.80	10.9	H	4.16	33.40	48.46	5.54
905.2	4,526.00	9.1	V	4.76	34.12	47.98	6.02
905.2	4,526.00	9.4	H	4.76	34.12	48.28	5.72

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

**APPLICANT:** Technologies to be, Incorporated

**FCC ID:** TMKMSU102

**NAME OF TEST:** RADIATION INTERFERENCE

## TEST DATA CONTD.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
907.5	907.50	83.5	H	1.96	23.38	108.84	18.54
907.5	907.50	85.0	V	1.96	22.63	109.59	17.79
907.5	1,815.00	22.2	H	2.75	30.09	55.04	34.55
907.5	1,815.00	23.2	V	2.75	30.09	56.04	33.55
907.5	2,722.50	14.2	H	3.41	32.87	50.48	3.52
907.5	2,722.50	15.8	V	3.41	32.87	52.08	1.92
907.5	3,630.00	7.5	V	4.17	33.40	45.07	8.93
907.5	3,630.00	8.5	H	4.17	33.40	46.07	7.93
907.5	4,537.50	8.3	H	4.77	34.13	47.20	6.80
907.5	4,537.50	8.7	V	4.77	34.13	47.60	6.40
907.5	8,167.50	11.2	H	6.27	36.30	53.77	0.23

METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-2003  
& the FCC/OET Guidance on Measurements for Frequency  
Hopping Spread Spectrum Systems - Public Notice  
DA 00-705. Dated March 30, 2000. Measurements were  
made at the test site of TIMCO ENGINEERING INC.  
located at 849 N.W. State Road 45, Newberry, FL 32669.

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## Method of Measuring Radiated Spurious Emissions

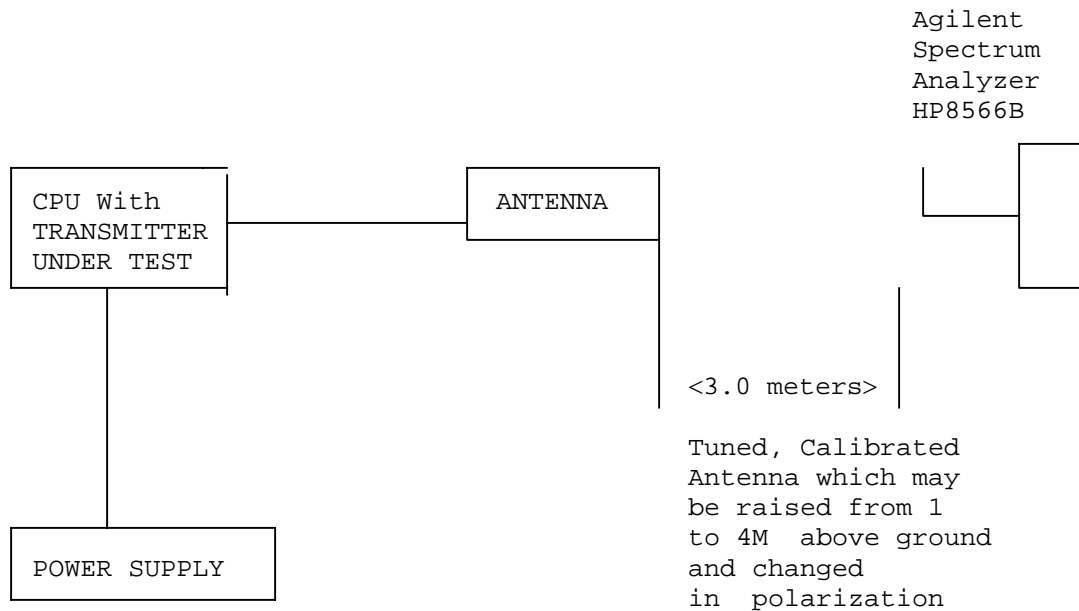

Equipment placed 80cm above ground  
on a rotatable platform.

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102


REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc



# TIMCO ENGINEERING INC.

849 NW State Road 45  
Newberry, Florida 32669  
<http://www.timcoengr.com>  
888.472.2424 F 352.472.2030

## CHANNEL SPACING

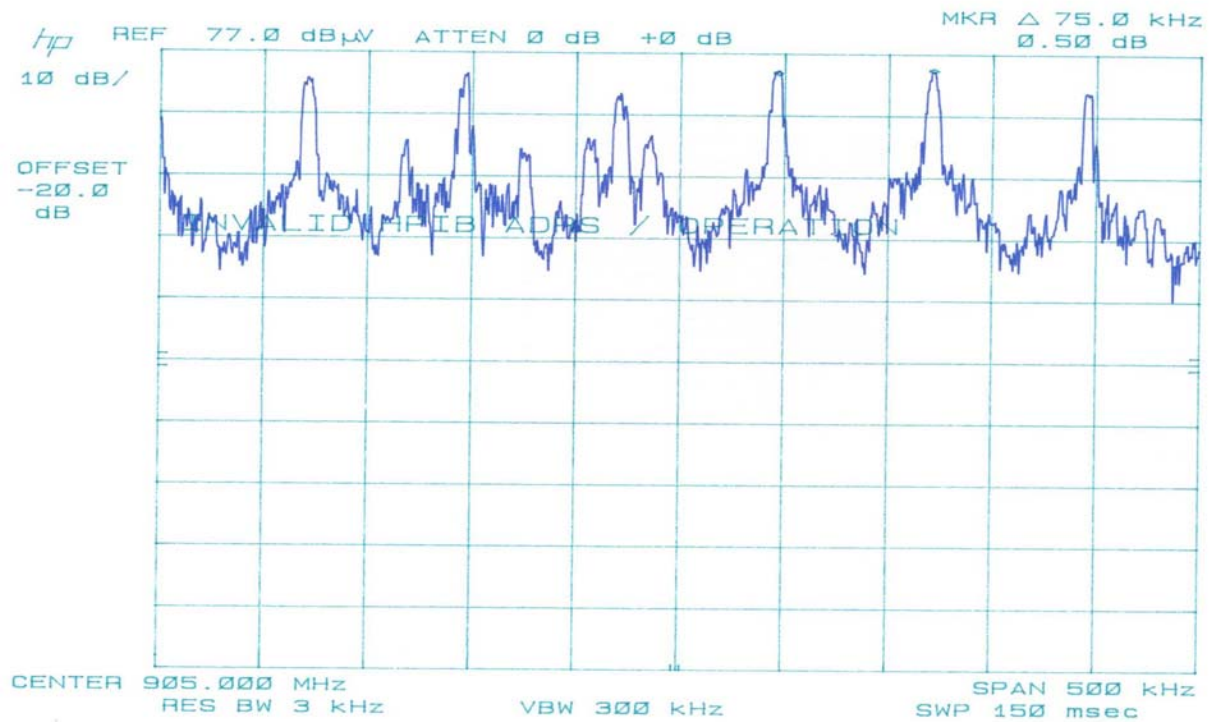

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## 20 dB BANDWIDTH OF A HOPPING CHANNEL

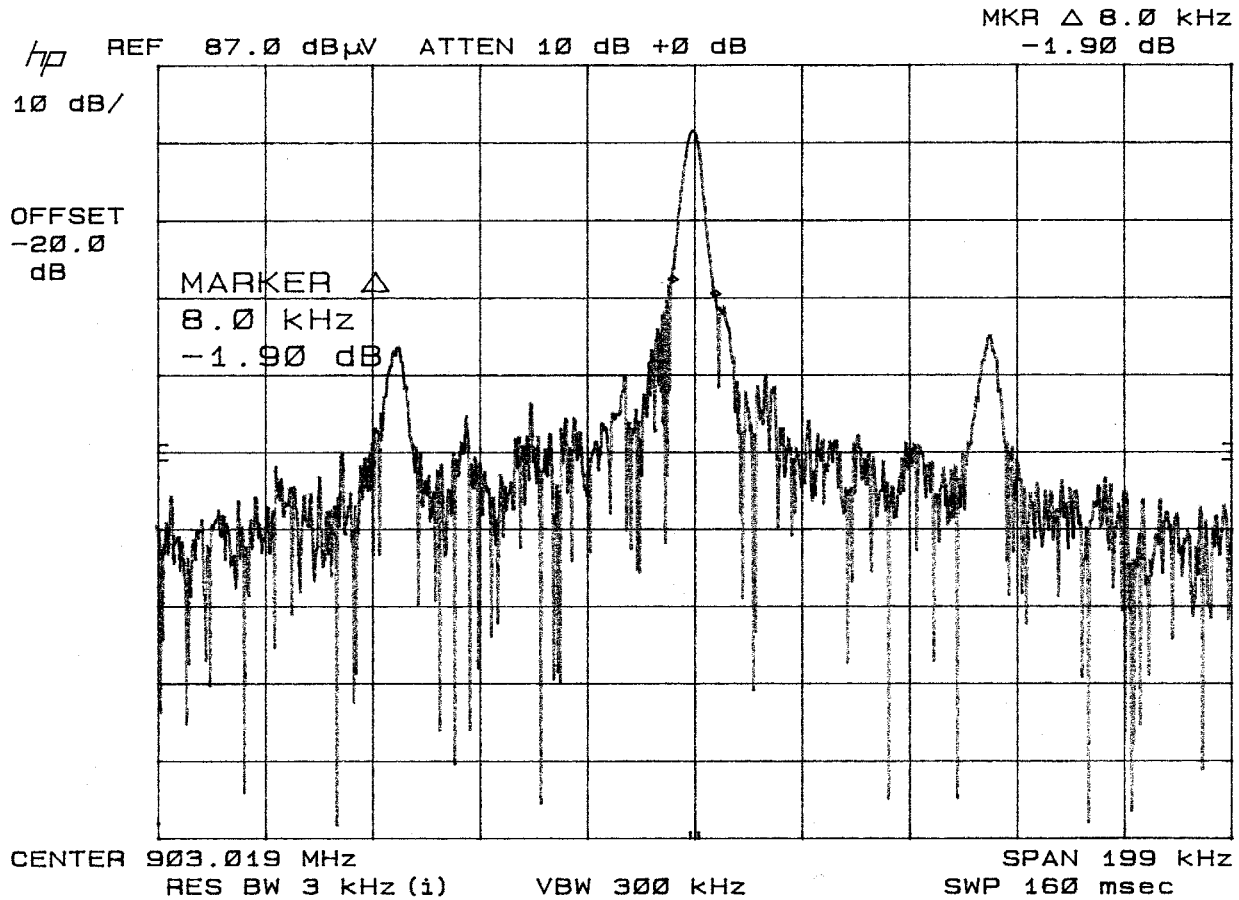

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## DWELL TIME

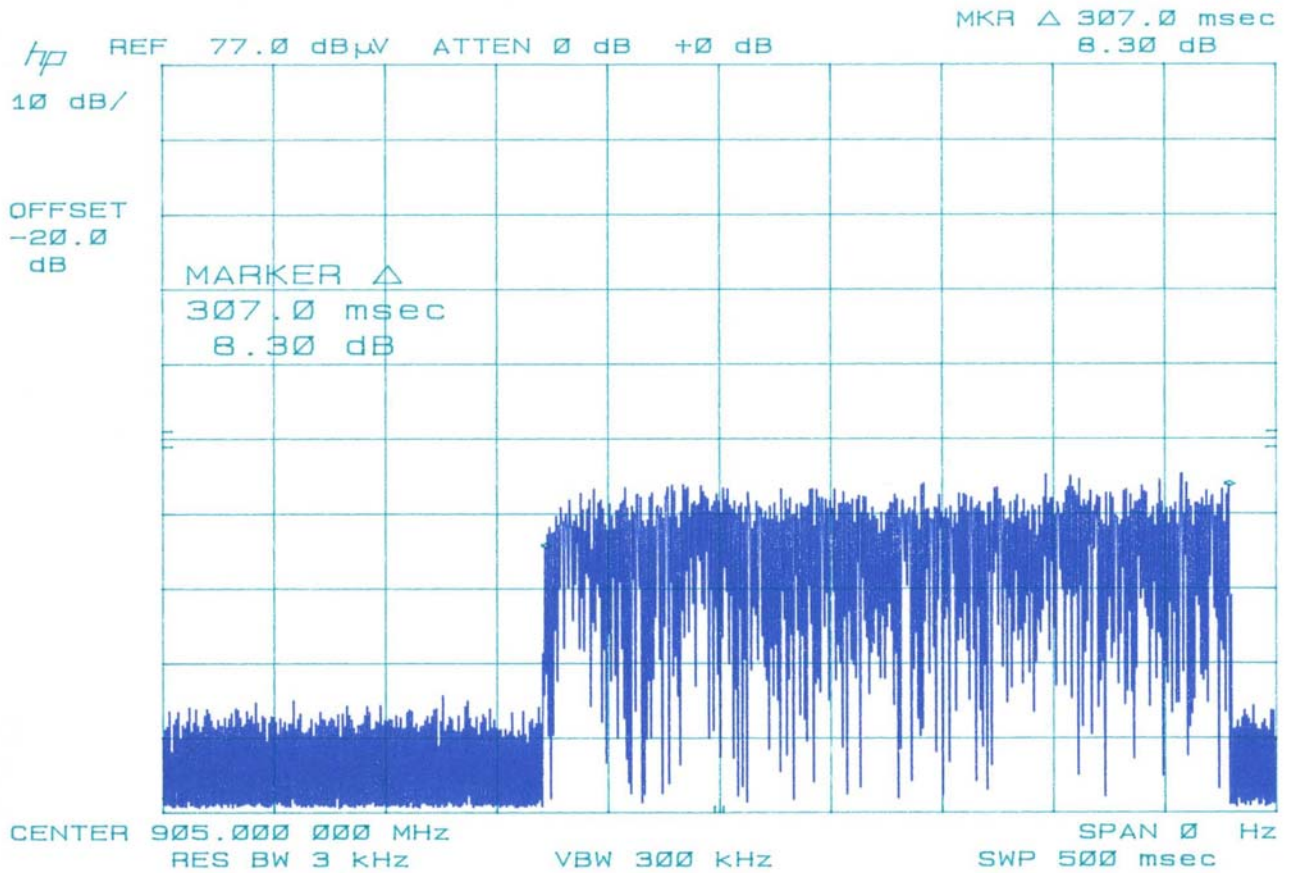

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45


Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

## BANDEDGE PLOT

MARKER AT LOWER BANDEDGE

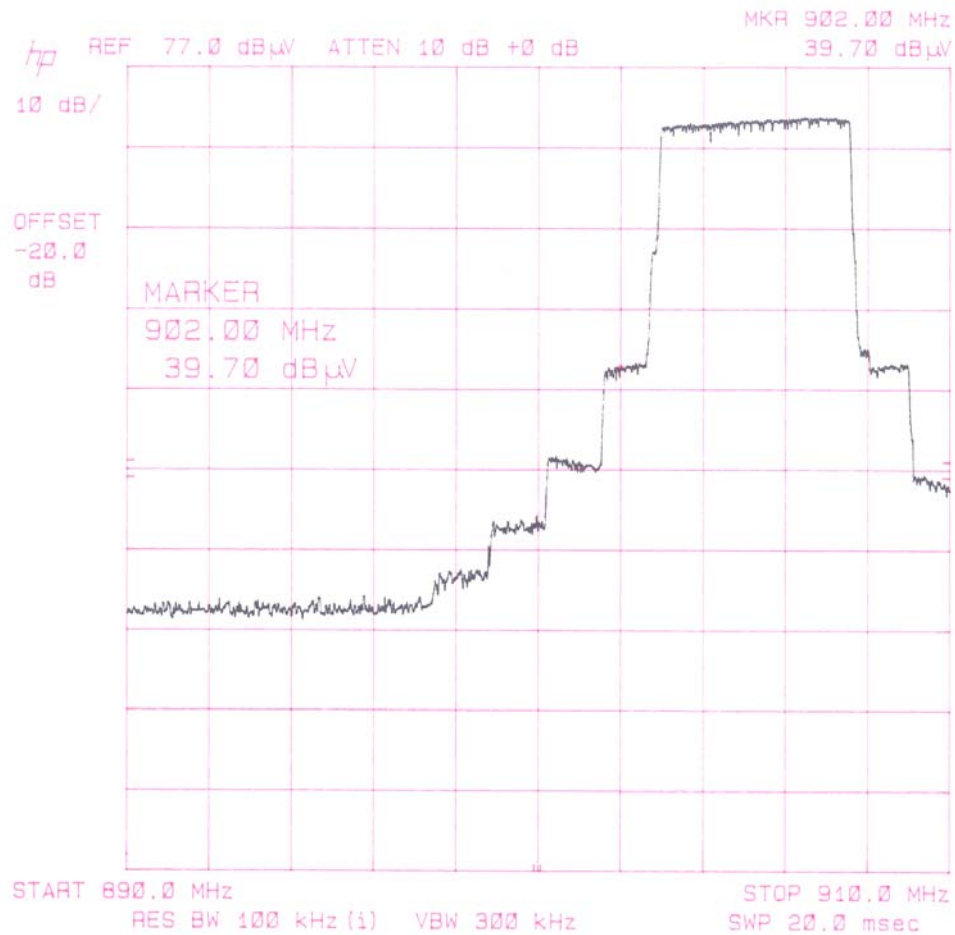

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc

# TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: [tei@timcoengr.com](mailto:tei@timcoengr.com)

Number of hopping channels




Ref Lvl

102 dBμV

RBW 100 kHz RF Att 30 dB

VBW 100 kHz

SWT 5 ms Unit dBμV

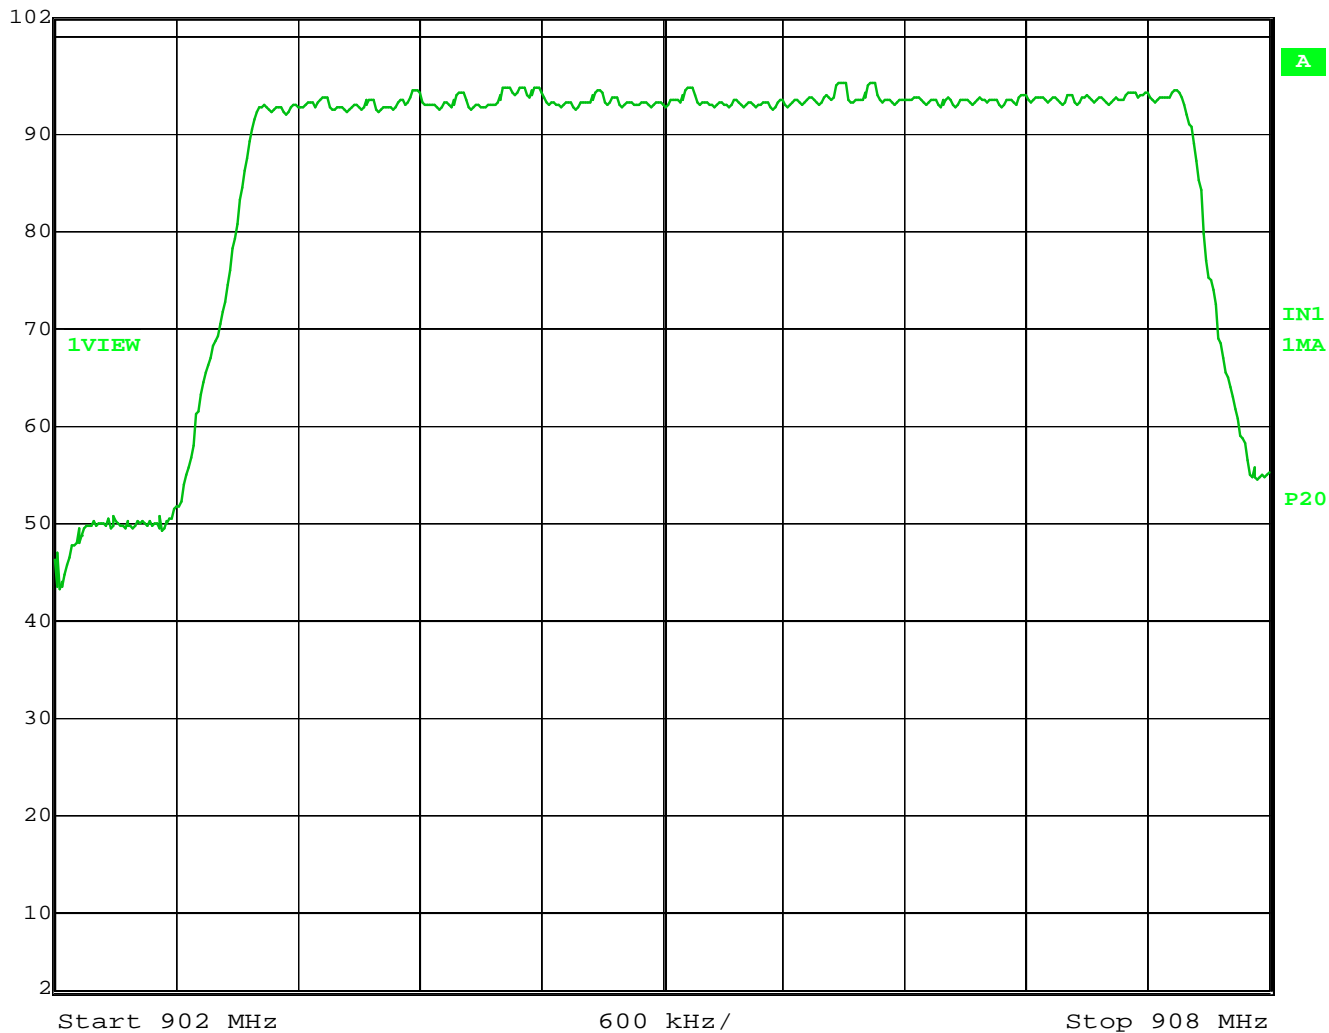

Date: 16.MAR.2006 11:33:28

APPLICANT: Technologies to be, Incorporated

FCC ID: TMKMSU102

REPORT #: V:\T\TechnologiesToBe\_TMK\1985XT5\1985XT5TestReport.doc