

4. 6 dB bandwidth

4.1. Test setup



4.2. Limit

According to §15.407(e), within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

4.3. Test procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

1. This measurement settings are specified in section C.2 of KDB 789033_v01r03.
2. Set RBW = 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
9. In case of band crossing channels 138, 142 and 144, the measurement is complied with section D of KDB 644545_D03 v01.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


4.4. Test result

Ambient temperature : $(23 \pm 1)^\circ\text{C}$
 Relative humidity : 47 % R.H.

Band	Mode	Frequency (MHz)	Ch.	Data Rate	6 dB Bandwidth (MHz)	Minimum Bandwidth (kHz)
U-NII 3	11a	5 745	149	6Mbps	16.208	500
		5 785	157	6Mbps	16.498	
		5 825	165	6Mbps	16.382	
	11n_HT20	5 745	149	MCS0	16.382	
		5 785	157	MCS0	17.656	
		5 825	165	MCS0	17.366	
	11n_HT40	5 755	151	MCS0	36.060	
		5 795	159	MCS0	36.540	
	11ac_VHT80	5 775	155	MCS0	75.950	
U-NII 3 (Band-Crossing channels)	11a	5 720	144	6Mbps	3.220	
	11n_HT20	5 720	144	MCS0	3.857	
	11n_HT40	5 710	142	MCS0	3.280	
	11ac_VHT80	5 690	138	MCS0	3.280	

802.11a (Band 3)

Low Channel (5 745 MHz)

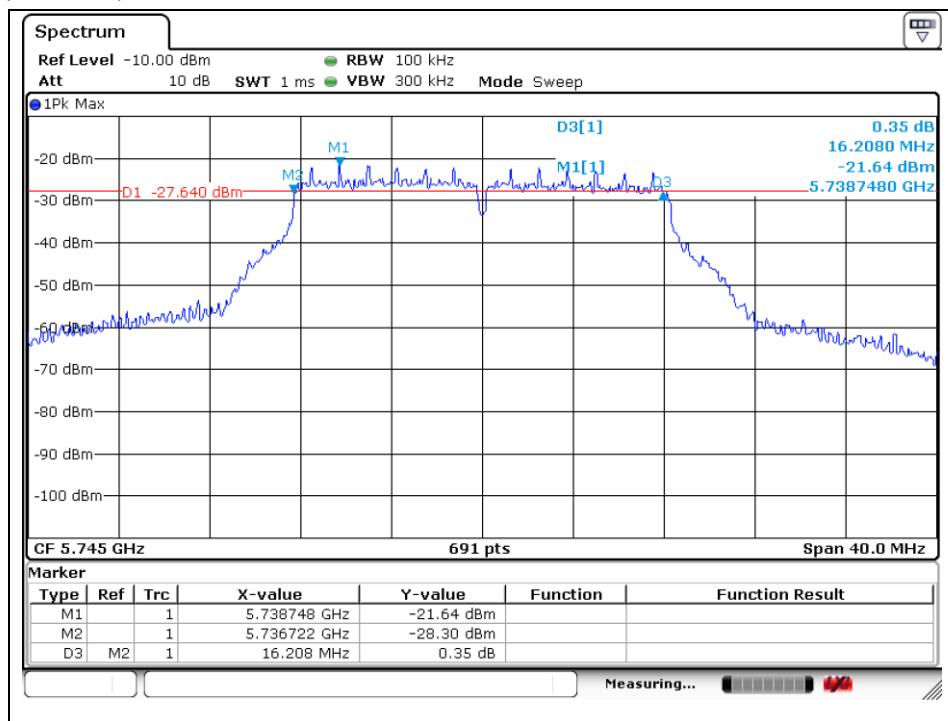

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

Middle Channel (5 785 MHz)

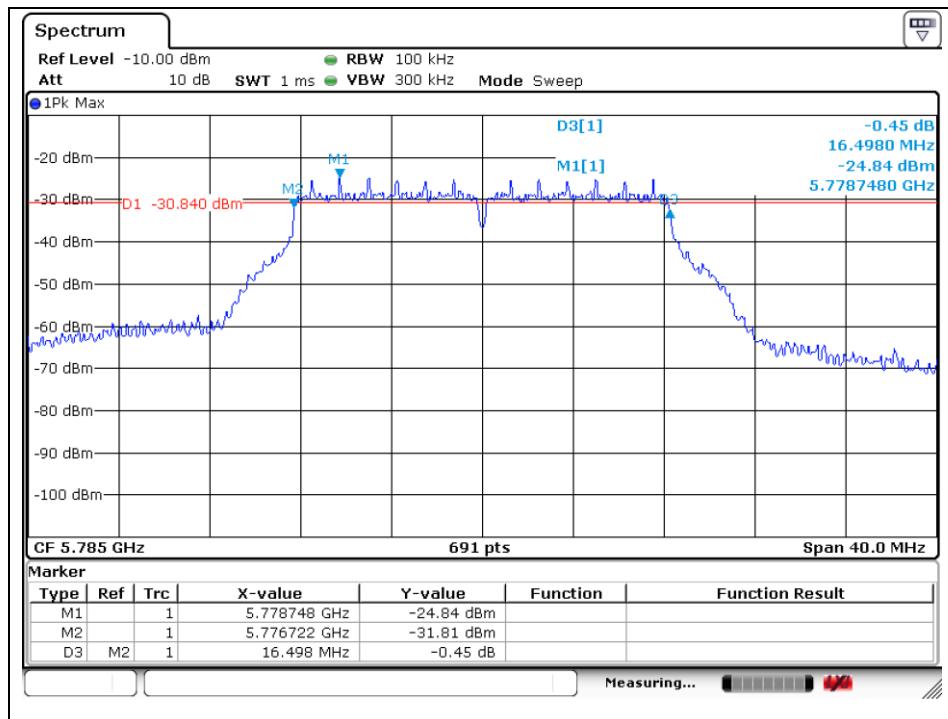

High Channel (5 825 MHz)

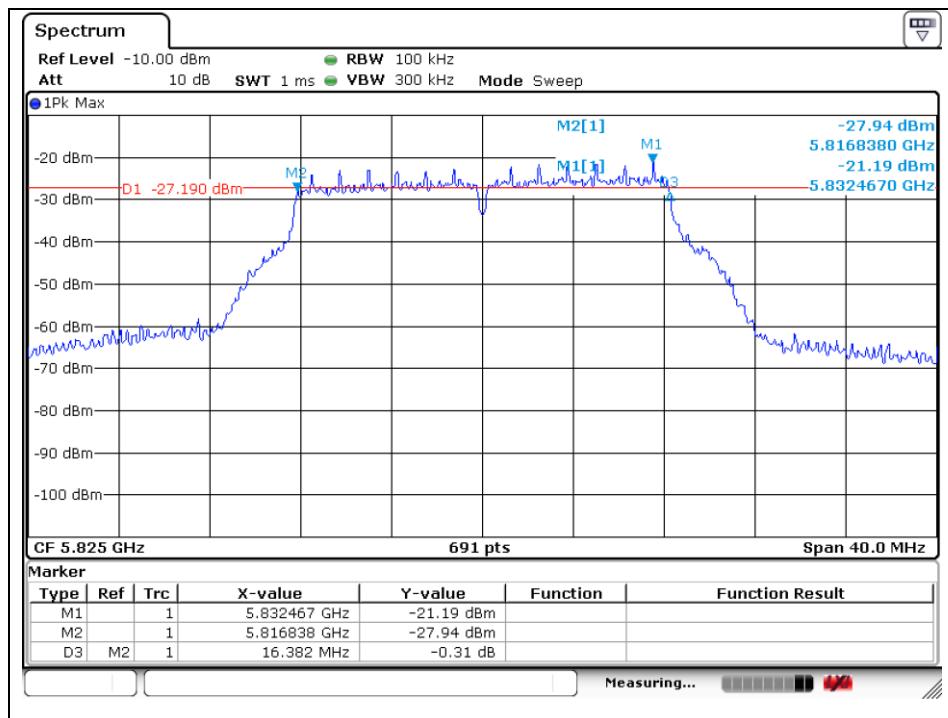

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

802.11n_HT20 (Band 3)

Low Channel (5 745 MHz)

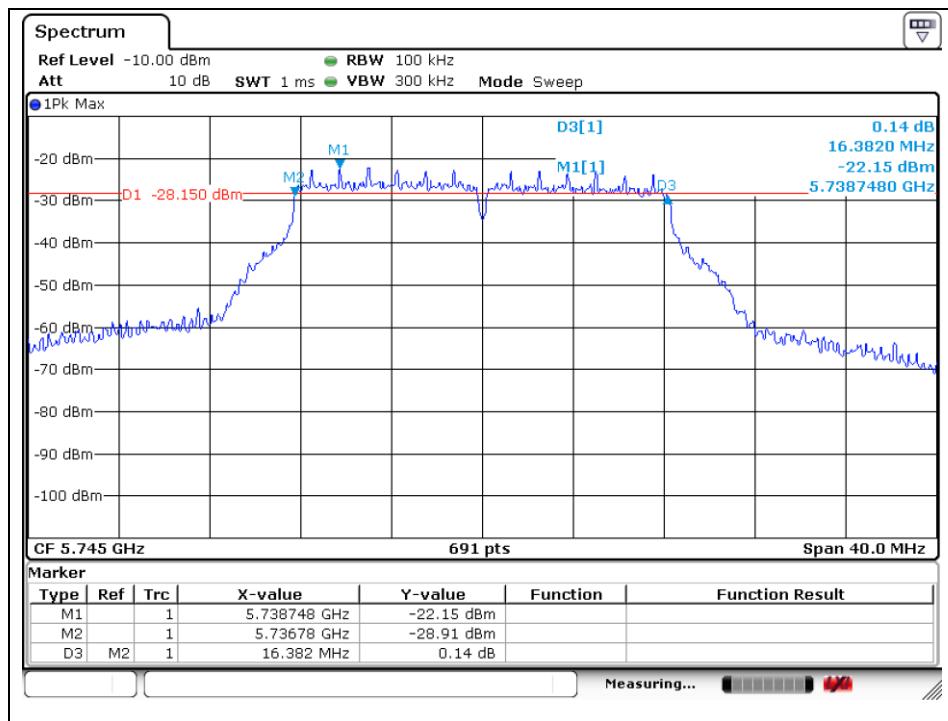

Middle Channel (5 785 MHz)

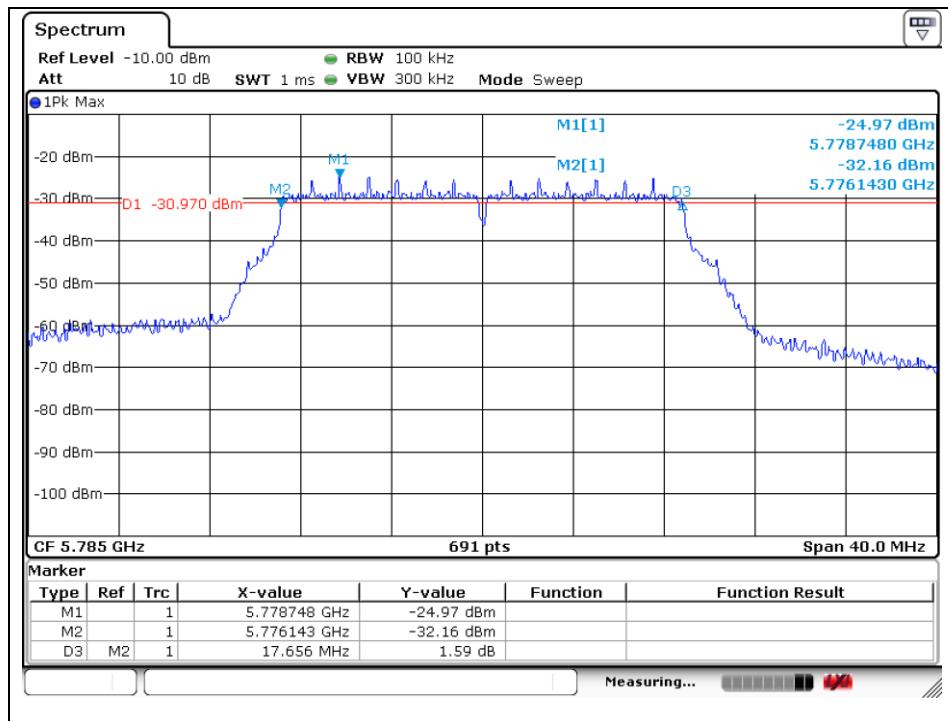

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

High Channel (5.825 GHz)

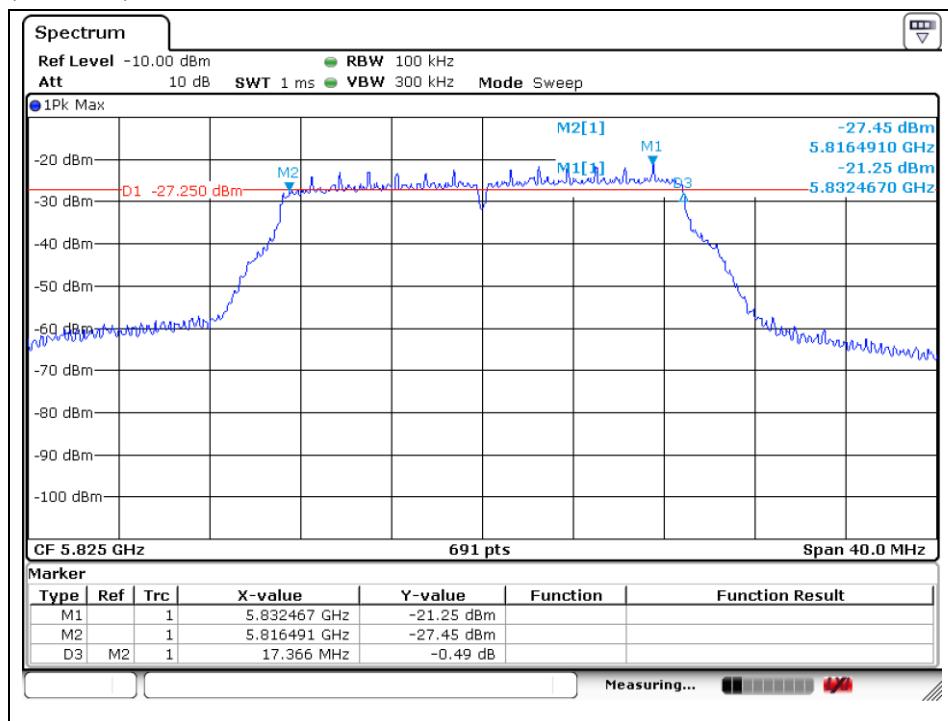

802.11n_HT40 (Band 3)


Low Channel (5.755 GHz)

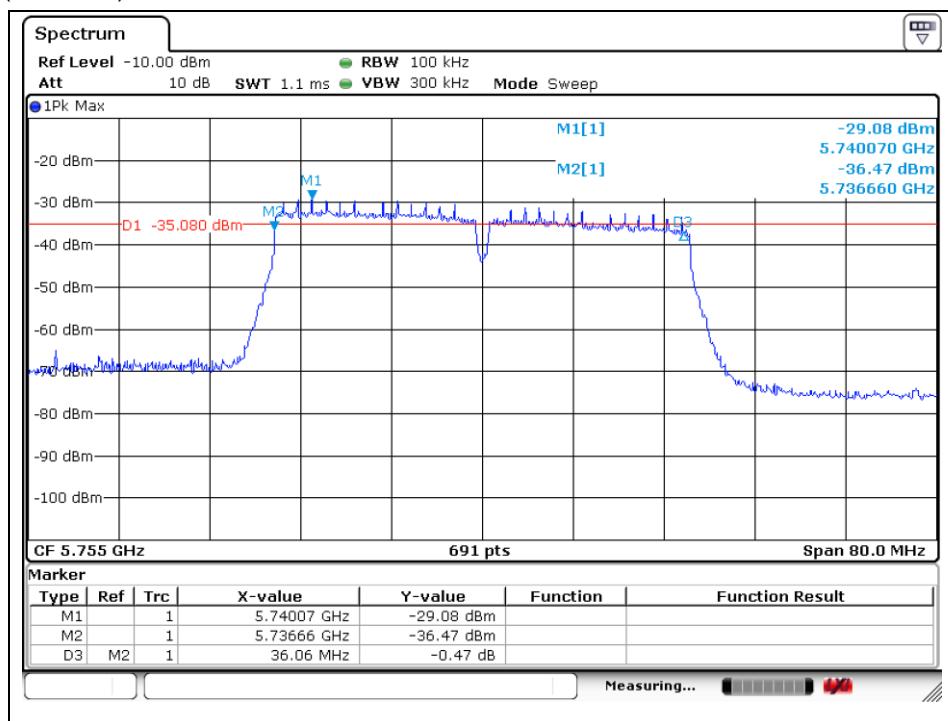

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

High Channel (5 795 MHz)

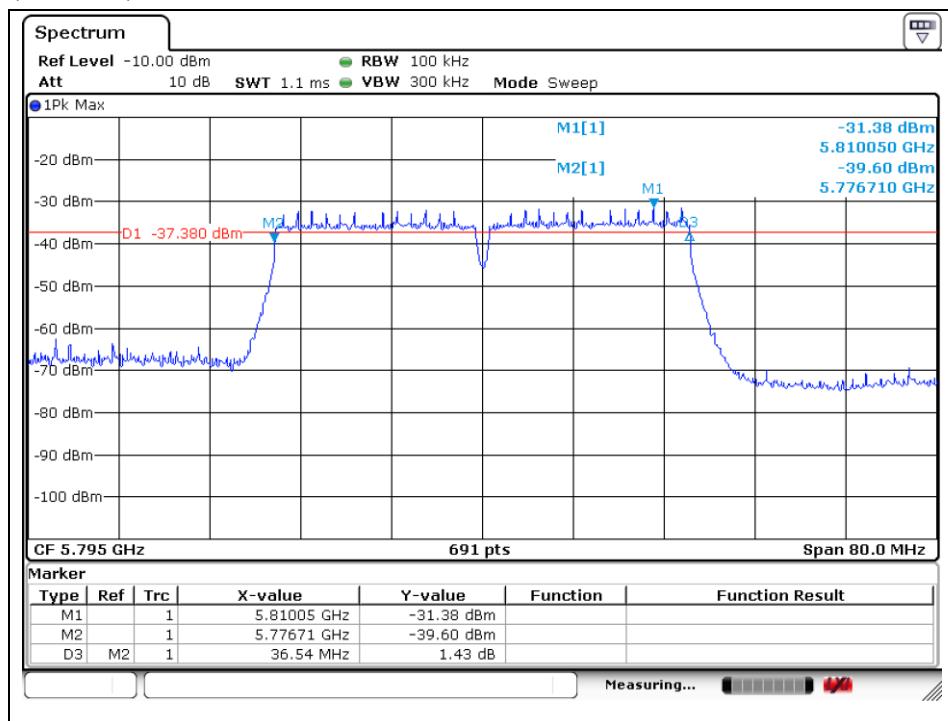

802.11ac_VHT80 (Band 3)

Middle Channel (5 775 MHz)

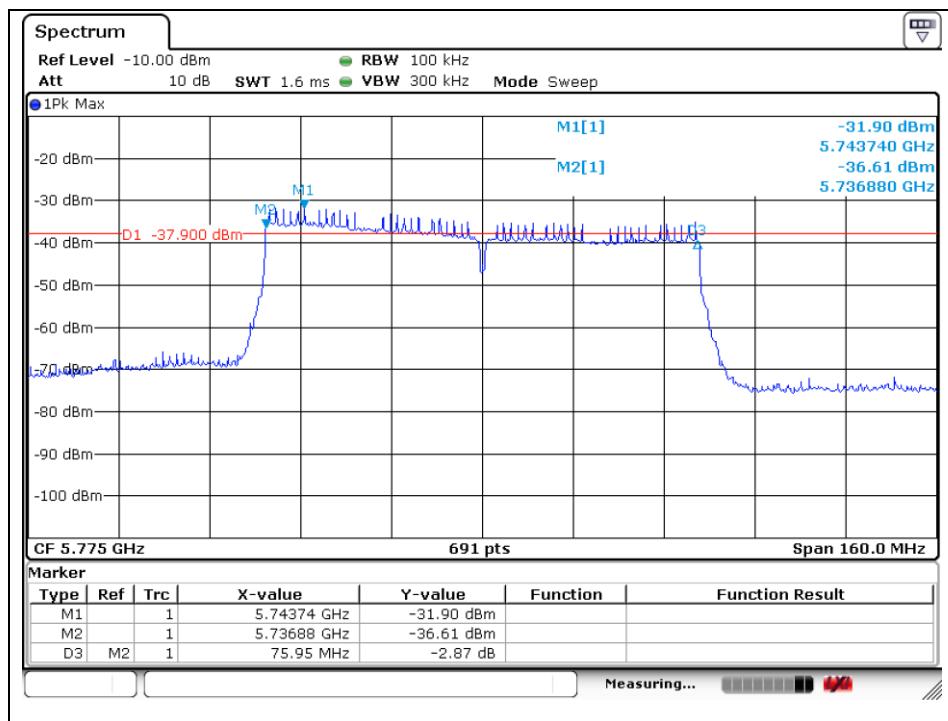

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

Band-crossing channels

802.11a (5 720 MHz)

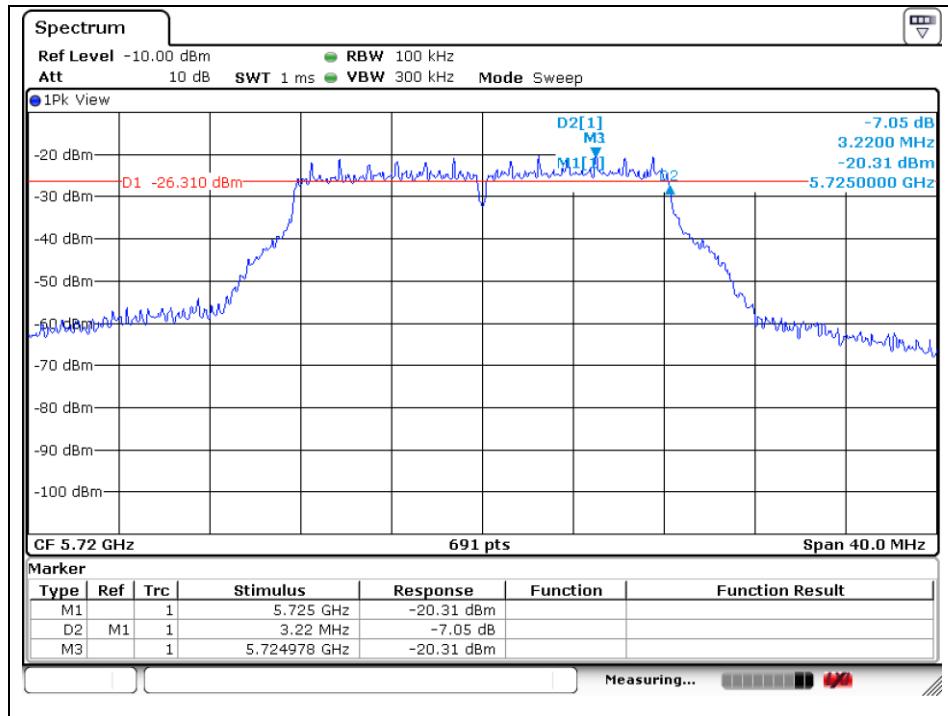

802.11n_HT20 (5 720 MHz)

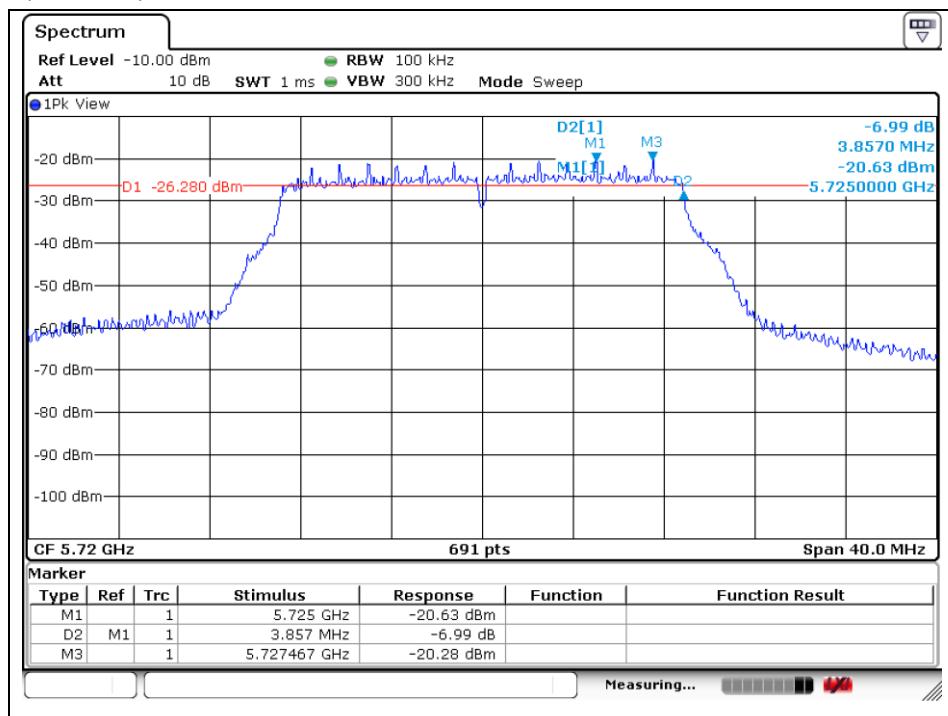

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

802.11n_HT40 (5 710 MHz)

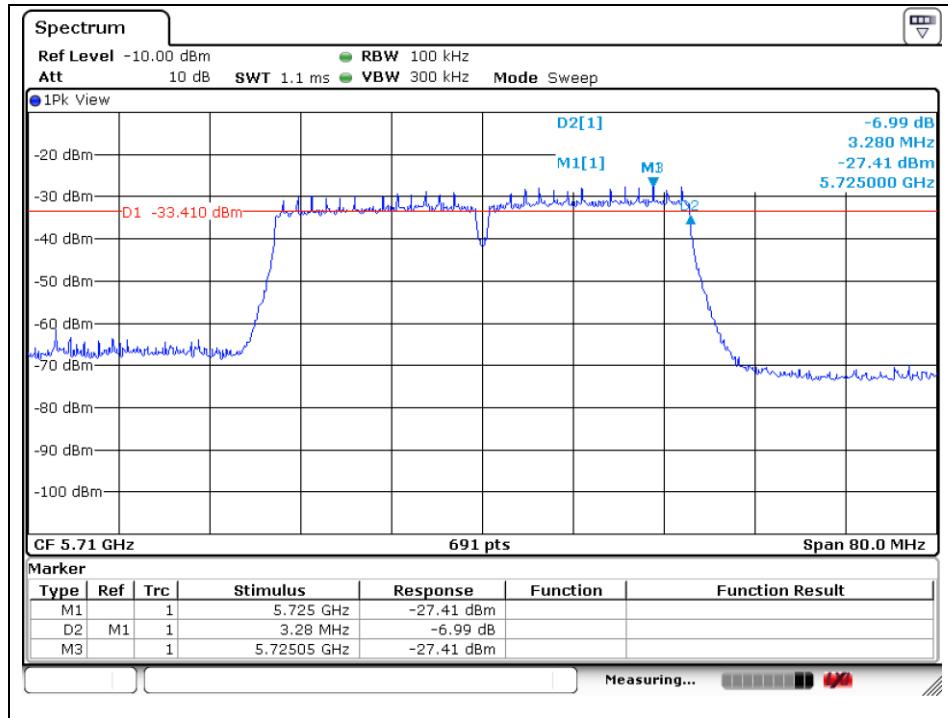

802.11ac_VHT80 (5 690 MHz)

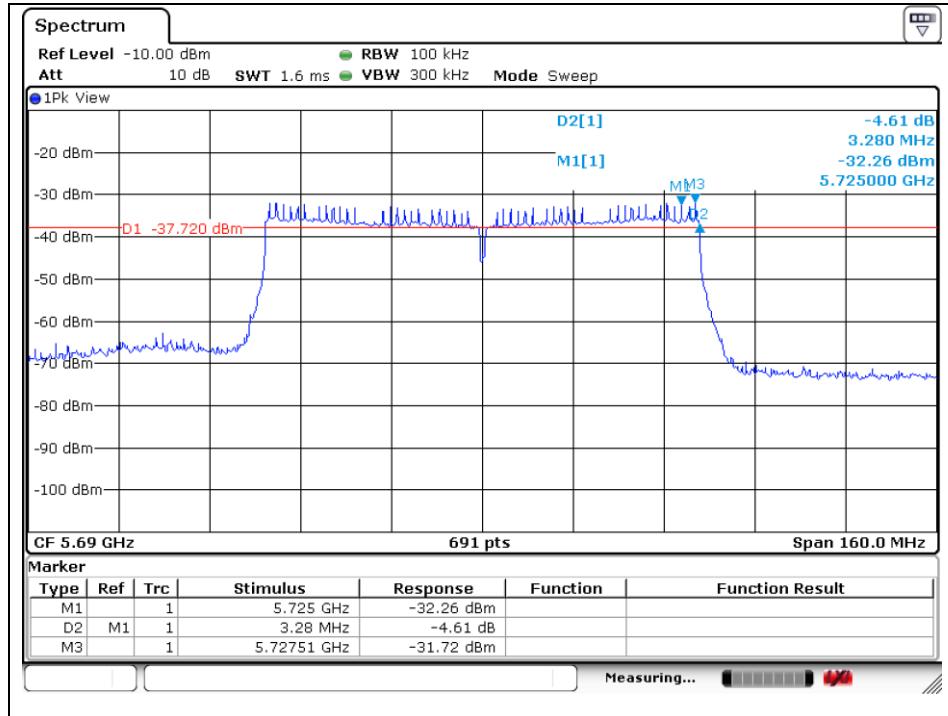

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

5. Maximum Conducted Output Power

5.1. Test setup

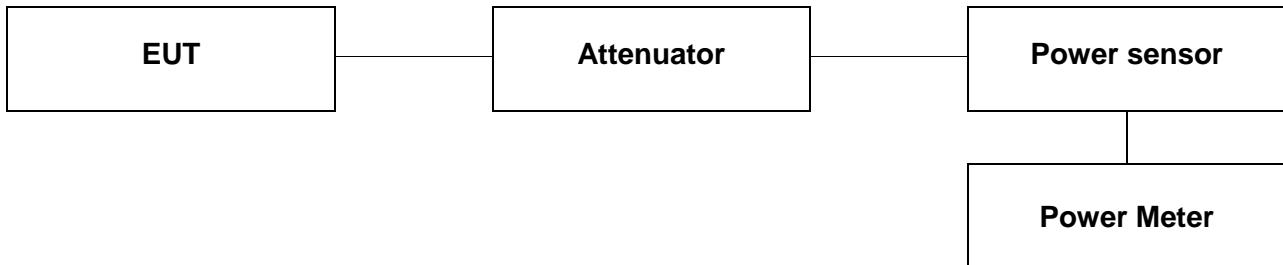

5.2. Limit

According to 15.407 (a)(1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dB i. In addition, the maximum power spectral density shall not exceed 11 dB m in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dB i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB i.

According to 15.407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dB m + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dB m in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dB i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB i.

According to 15.407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dB m in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dB i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB i. However, fixed point-to point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dB i without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

5.3. Test procedure

1. This measurement settings are specified in section E.3.a of KDB 789033_v01r03.
2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
 - The EUT is configured to transmit continuously or to transmit with a consistent duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
3. If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section II.B.
4. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
5. Adjust the measurement in dB m by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
6. In case of band crossing channels 138, 142 and 144, the measurement is complied with section E.2.d of KDB 789033_D02 v01r03 and section D of KDB 644545_D03 v01.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

5.4. Test result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

Mode	Band	Frequency (MHz)	Conducted Power (dB m)			
			Data Rate	Average Power (dB m)	Duty Correction Factor (dB)	Average Power Result (dB m)
11a	U-NII 1	5 180	6Mbps	12.47	0.32	12.79
		5 220	6Mbps	13.39	0.32	13.71
		5 240	6Mbps	11.33	0.32	11.65
	U-NII 2A	5 260	6Mbps	10.43	0.32	10.75
		5 300	6Mbps	12.60	0.32	12.92
		5 320	6Mbps	13.86	0.32	14.18
	U-NII 2C	5 500	6Mbps	10.91	0.32	11.23
		5 580	6Mbps	10.69	0.32	11.01
		5 700	6Mbps	11.46	0.32	11.78
	U-NII 3	5 745	6Mbps	12.19	0.32	12.51
		5 785	6Mbps	9.71	0.32	10.03
		5 825	6Mbps	12.43	0.32	12.75

Band	Conducted Power Limit (dB m)						
	Frequency (MHz)	Fixed Limit (dB m)	26 dB BW (MHz)	11+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)	
U-NII 1	5 180	23.98				23.98	
	5 220						
	5 240						
U-NII 2A	5 260	23.98	21.534	24.33	1.42	23.98	
	5 300		21.360	24.30			
	5 320		21.331	24.29			
U-NII 2C	5 500	23.98	21.592	24.34	-0.85	23.98	
	5 580		21.650	24.35			
	5 700		21.534	24.33			
U-NII 3	5 745	30.00				30.00	
	5 785						
	5 825						

Remark:

1. Result (dB m) = Average Power(dB m) + Duty Correction Factor (dB)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

Mode	Band	Frequency (MHz)	Conducted Power (dB m)			
			Data Rate	Average Power (dB m)	Duty Correction Factor (dB)	Average Power Result (dB m)
11n_HT20	U-NII 1	5 180	MCS0	12.13	0.32	12.45
		5 220	MCS0	13.27	0.32	13.59
		5 240	MCS0	11.31	0.32	11.63
	U-NII 2A	5 260	MCS0	10.40	0.32	10.72
		5 300	MCS0	12.59	0.32	12.91
		5 320	MCS0	13.83	0.32	14.15
	U-NII 2C	5 500	MCS0	10.83	0.32	11.15
		5 580	MCS0	10.65	0.32	10.97
		5 700	MCS0	11.37	0.32	11.69
	U-NII 3	5 745	MCS0	12.11	0.32	12.43
		5 785	MCS0	9.58	0.32	9.90
		5 825	MCS0	12.40	0.32	12.72

Band	Conducted Power Limit (dB m)							
	Frequency (MHz)	Fixed Limit (dB m)	26 dB BW (MHz)	11+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)		
U-NII 1	5 180	23.98	\			23.98		
	5 220		\					
	5 240		\					
U-NII 2A	5 260	23.98	21.766	24.38	1.42	23.98		
	5 300		21.881	24.40				
	5 320		21.823	24.39				
U-NII 2C	5 500	23.98	21.592	24.34	-0.85	23.98		
	5 580		21.708	24.37				
	5 700		21.650	24.35				
U-NII 3	5 745	30.00	\			30.00		
	5 785		\					
	5 825		\					

Remark:

1. Result (dB m) = Average Power(dB m) + Duty Correction Factor (dB)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

Mode	Band	Frequency (MHz)	Conducted Power (dB m)			
			Data Rate	Average Power (dB m)	Duty Correction Factor (dB)	Average Power Result (dB m)
11n_HT40	U-NII 1	5 190	MCS0	8.49	0.60	9.09
		5 230	MCS0	7.84	0.60	8.44
	U-NII 2A	5 270	MCS0	7.15	0.60	7.75
		5 310	MCS0	9.65	0.60	10.25
	U-NII 2C	5 510	MCS0	7.71	0.60	8.31
		5 550	MCS0	7.68	0.60	8.28
		5 670	MCS0	6.73	0.60	7.33
	U-NII 3	5 755	MCS0	6.89	0.60	7.49
		5 795	MCS0	5.68	0.60	6.28

Band	Conducted Power Limit (dB m)					
	Frequency (MHz)	Fixed Limit (dB m)	26 dB BW (MHz)	11+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
U-NII 1	5 190	23.98	40.640		1.42	23.98
	5 230		27.09			
U-NII 2A	5 270	23.98	40.570	27.08	1.42	23.98
	5 310		40.520	27.08		
U-NII 2C	5 510	23.98	40.640	27.09	-0.85	23.98
	5 550		40.980	27.13		
	5 670					
U-NII 3	5 755	30.00	40.640		-2.39	30.00
	5 795					

Remark:

1. Result (dB m) = Average Power(dB m) + Duty Correction Factor (dB)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

Mode	Band	Frequency (MHz)	Conducted Power (dB m)			
			Data Rate	Average Power (dB m)	Duty Correction Factor (dB)	Average Power Result (dB m)
11ac_VHT80	U-NII 1	5 210	MCS0	7.27	1.14	8.41
	U-NII 2A	5 290	MCS0	7.28	1.14	8.42
	U-NII 2C	5 530	MCS0	6.61	1.14	7.75
		5 690	MCS0	6.18	1.14	7.32
	U-NII 3	5 775	MCS0	5.54	1.14	6.68

Band	Conducted Power Limit (dB m)					
	Frequency (MHz)	Fixed Limit (dB m)	26 dB BW (MHz)	11+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
U-NII 1	5 210	23.98			1.42	23.98
U-NII 2A	5 290	23.98	82.160	30.15	1.42	23.98
U-NII 2C	5 530	23.98	81.970	30.14	-0.85	23.98
	5 690		84.050	30.25		
U-NII 3	5 775	30.00			-2.39	30.00

Remark:

1. Result (dB m) = Average Power (dB m) + Duty Correction Factor (dB)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

-Band-crossing channels

Band	Mode	Frequency (MHz)	Conducted Power (dB m)			
			Data Rate [Mbps]	Average Power (dB m)	Duty Correction Factor (dB)	Average Power Result (dB m)
U-NII 2C	11a	5 720	6	11.11	0.32	11.43
U-NII 3			6	5.35	0.32	5.67
U-NII 2C	11n_HT20	5 720	MCS0	10.97	0.32	11.29
U-NII 3			MCS0	5.77	0.32	6.09
U-NII 2C	11n_HT40	5 710	MCS0	6.48	0.60	7.08
U-NII 3			MCS0	-2.66	0.60	-2.06
U-NII 2C	11ac_VHT80	5 690	MCS0	4.92	1.14	6.06
U-NII 3			MCS0	-8.13	1.14	-6.99

Band	Mode	Conducted Power Limit (dB m)					
		Frequency (MHz)	Fixed Limit (dB m)	26 dB BW (MHz)	11+10LogB (dB m)	Antenna gain (dB i)	Limit (dB m)
U-NII 2C	11a	5 720	23.98	15.709	22.96	-0.85	22.96
U-NII 3							30.00
U-NII 2C	11n_HT20	5 720	23.98	15.651	22.95	-0.85	22.95
U-NII 3							30.00
U-NII 2C	11n_HT40	5 710	23.98	35.100	26.45	-0.85	23.98
U-NII 3							30.00
U-NII 2C	11ac_VHT80	5 690	23.98	76.780	29.85	-0.85	23.98
U-NII 3							30.00

Remark:

1. Result (dB m) = Average Power(dB m) + Duty Correction Factor (dB)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

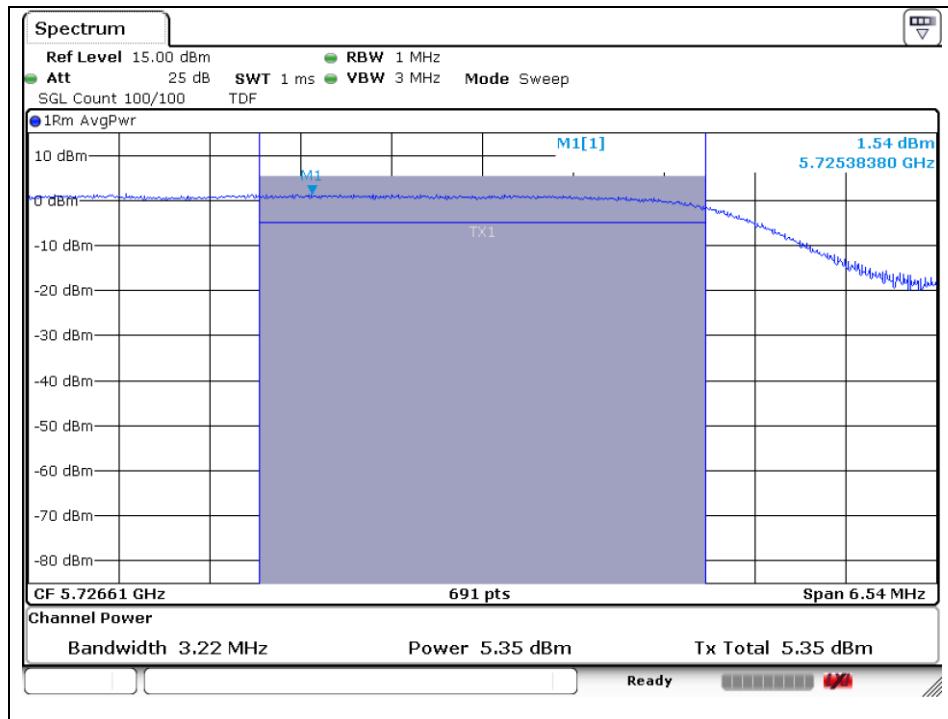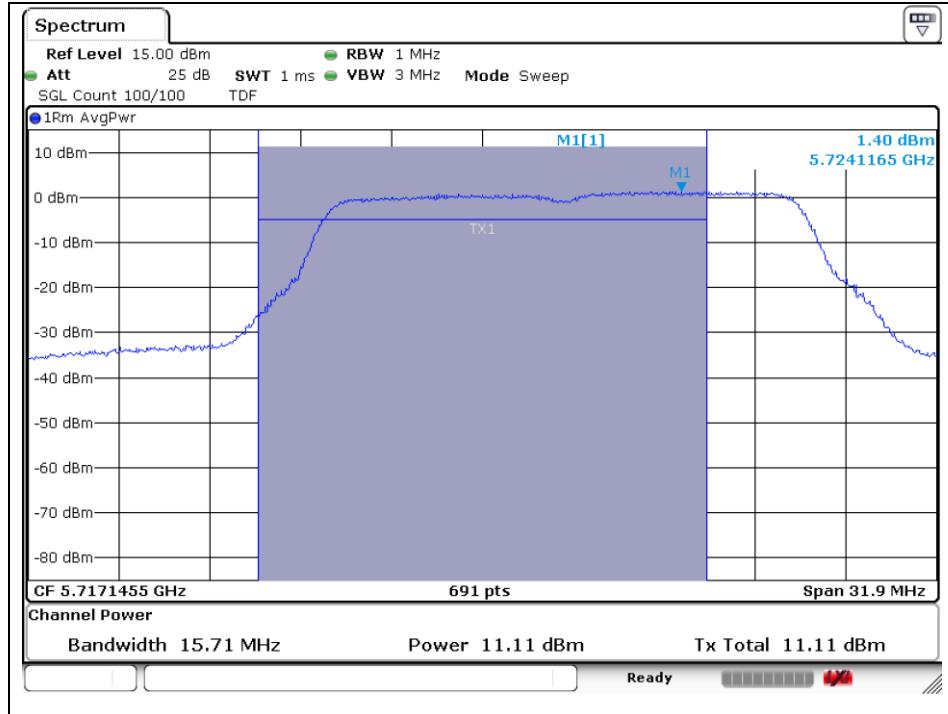Band-crossing channels**802.11a (5 720 MHz)**



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

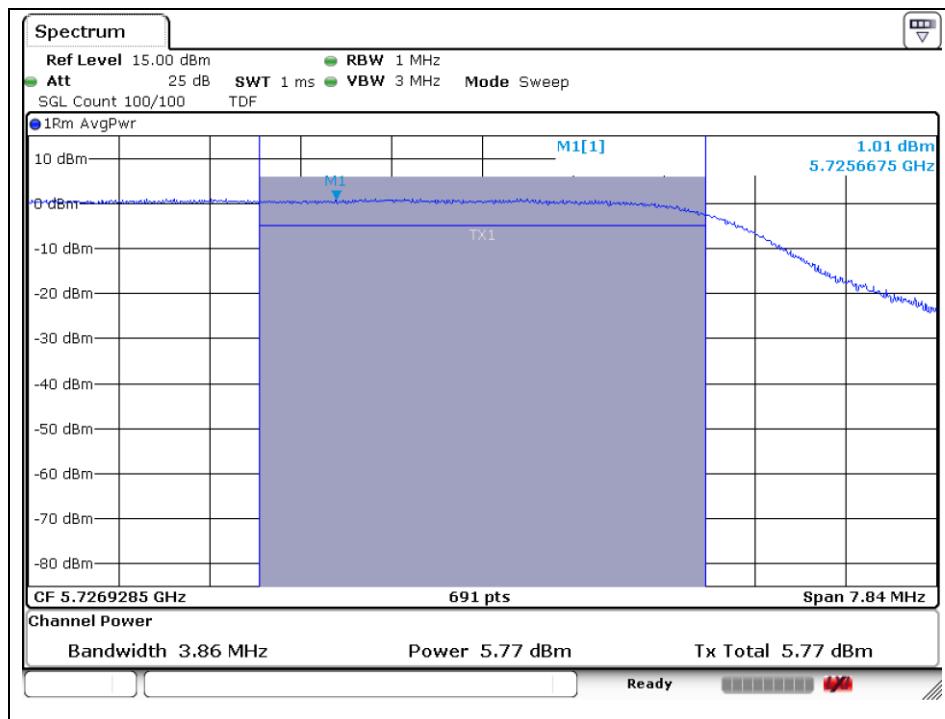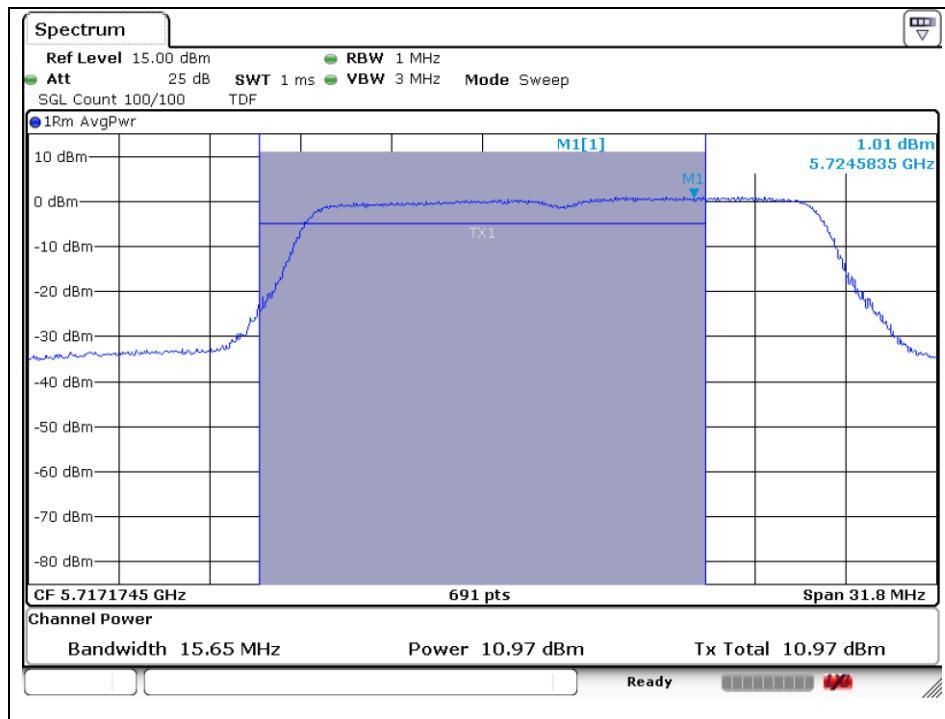802.11n_HT20 (5.720 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)



Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

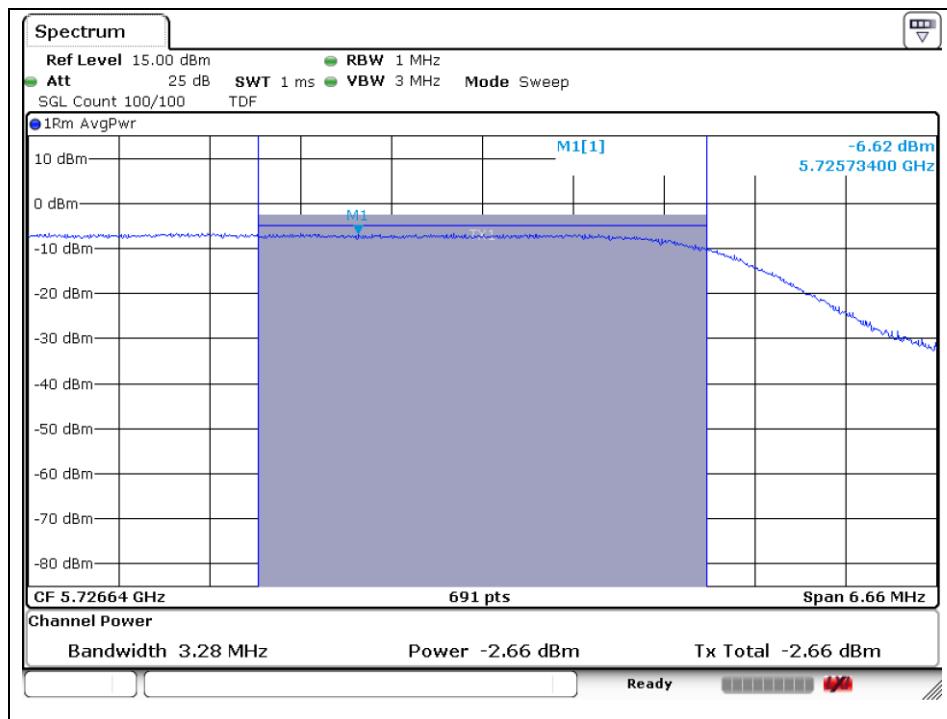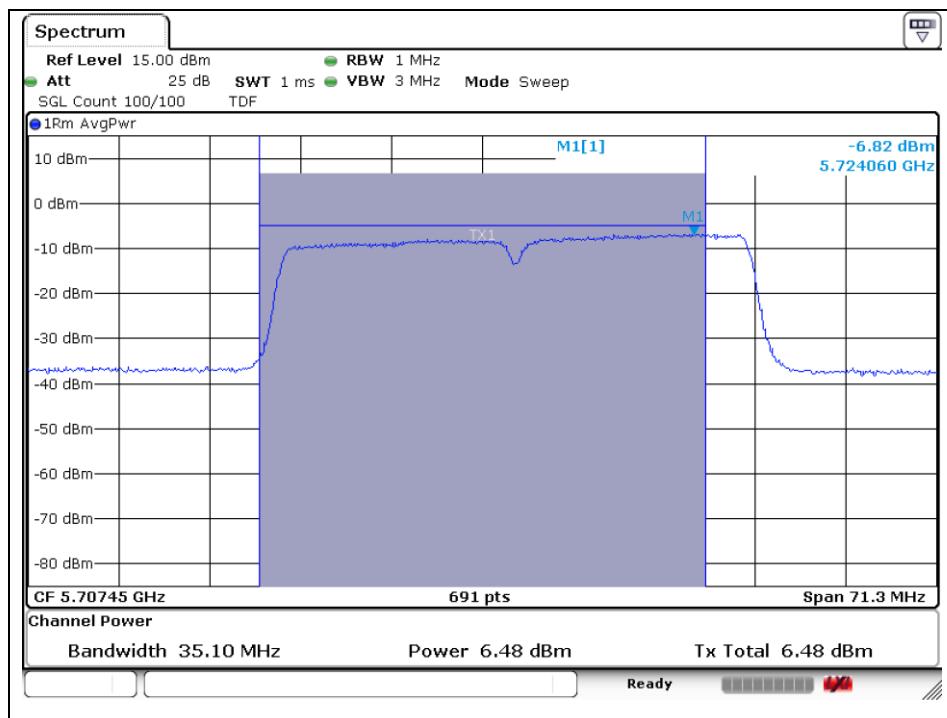802.11n_HT40 (5 710 MHz)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

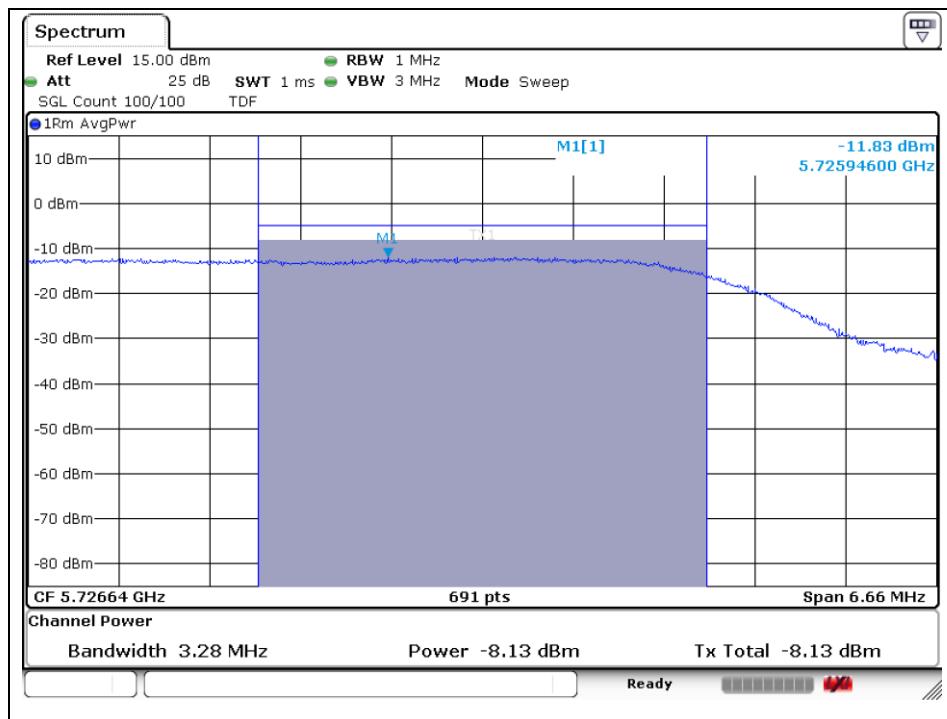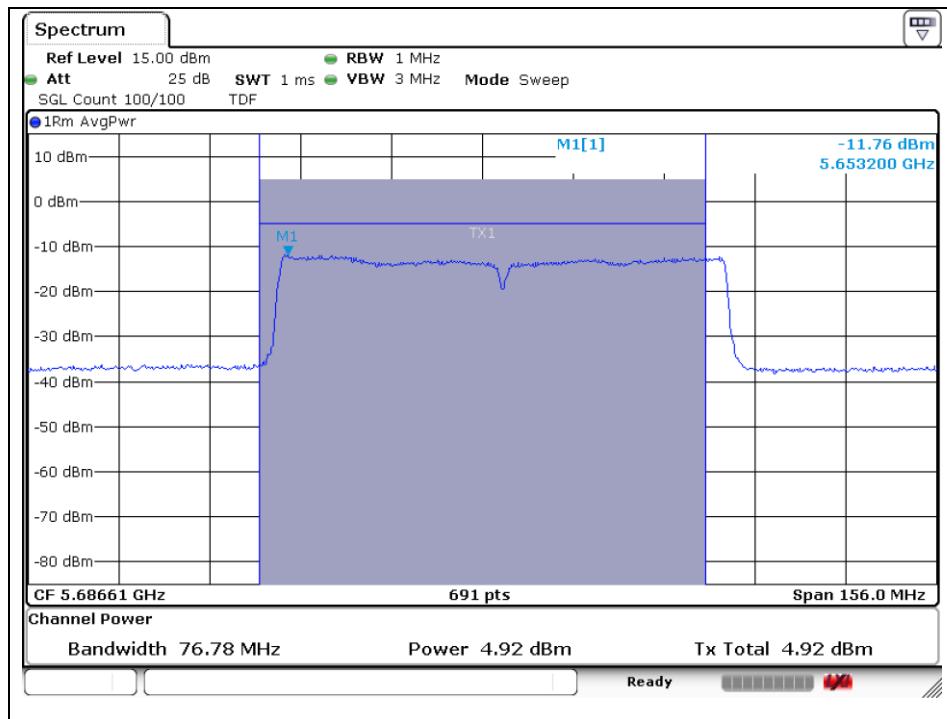802.11ac_VHT80 (5 690 MHz)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

6. Peak Power Spectral Density

6.1. Test setup



6.2. Limit

According to 15.407 (a)(1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dB i. In addition, the maximum power spectral density shall not exceed 11 dB m in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dB i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB i.

According to 15.407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dB m + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dB m in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dB i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB i.

According to 15.407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dB m in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dB i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB i. However, fixed point-to point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dB i without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

6.3. Test procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

1. This measurement settings are specified in section F of KDB 789033_v01r03.
2. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
3. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
4. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) **If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.**
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
5. The result is the Maximum PSD over 1 MHz reference bandwidth.
6. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set RBW $\geq 1/T$, where T is defined in section II.B.I.a).
 - b) Set VBW ≥ 3 RBW.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1 \text{ MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.
7. In case of band crossing channels 138, 142 and 144, the measurement is complied with section D of KDB 644545_D03 v01.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

6.4. Test result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

Mode	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz)
11a	U-NII 1	5 180	36	6	0.84	0.32	1.16	10
		5 220	44	6	1.86	0.32	2.18	
		5 240	48	6	-0.35	0.32	-0.03	
	U-NII 2A	5 260	52	6	-0.88	0.32	-0.56	11
		5 300	60	6	1.32	0.32	1.64	
		5 320	64	6	2.41	0.32	2.73	
	U-NII 2C	5 500	100	6	-0.12	0.32	0.20	11
		5 580	116	6	-1.00	0.32	-0.68	
		5 700	140	6	-0.01	0.32	0.31	
	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/500 kHz)
	U-NII 3	5 745	149	6	-2.19	0.32	-1.87	30
		5 785	157	6	-4.35	0.32	-4.03	
		5 825	165	6	-0.31	0.32	0.01	

Mode	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz)
11n_HT20	U-NII 1	5 180	36	MCS0	0.74	0.32	1.06	10
		5 220	44	MCS0	1.24	0.32	1.56	
		5 240	48	MCS0	-0.62	0.32	-0.30	
	U-NII 2A	5 260	52	MCS0	-1.30	0.32	-0.98	11
		5 300	60	MCS0	0.91	0.32	1.23	
		5 320	64	MCS0	2.00	0.32	2.32	
	U-NII 2C	5 500	100	MCS0	-0.95	0.32	-0.63	11
		5 580	116	MCS0	-1.40	0.32	-1.08	
		5 700	140	MCS0	-0.35	0.32	-0.03	
	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/500 kHz)
	U-NII 3	5 745	149	MCS0	-2.55	0.32	-2.23	30
		5 785	157	MCS0	-4.63	0.32	-4.31	
		5 825	165	MCS0	-0.84	0.32	-0.52	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

Mode	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz)
11n_HT40	U-NII 1	5 190	38	MCS0	-5.60	0.60	-5.00	10
		5 230	40	MCS0	-7.09	0.60	-6.49	
	U-NII 2A	5 270	54	MCS0	-6.70	0.60	-6.10	11
		5 310	62	MCS0	-4.95	0.60	-4.35	
	U-NII 2C	5 510	102	MCS0	-6.77	0.60	-6.17	11
		5 550	110	MCS0	-6.67	0.60	-6.07	
		5 670	134	MCS0	-6.67	0.60	-6.07	
	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/500 kHz)
	U-NII 3	5 755	151	MCS0	-9.58	0.60	-8.98	30
		5 795	159	MCS0	-10.89	0.60	-10.29	

Mode	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz)
11ac_VHT80	U-NII 1	5 210	42	MCS0	-9.83	1.14	-8.69	10
	U-NII 2A	5 290	58	MCS0	-9.48	1.14	-8.34	11
	U-NII 2C	5 530	106	MCS0	-10.69	1.14	-9.55	
		5 690	138	MCS0	-10.83	1.14	-9.69	
	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/500 kHz)
	U-NII 3	5 775	155	MCS0	-13.66	1.14	-12.52	30
	U-NII 1	5 210	42	MCS0	-9.83	1.14	-8.69	10
		5 290	58	MCS0	-9.48	1.14	-8.34	11
	U-NII 2A	5 530	106	MCS0	-10.69	1.14	-9.55	
		5 690	138	MCS0	-10.83	1.14	-9.69	

Band-crossing channels

Mode	Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz or dB m/500 kHz)
11a	U-NII 2C	5 720	144	6	0.37	0.32	0.69	11
	U-NII 3	5 720	144	6	-1.38	0.32	-1.06	30
11n_HT20	U-NII 2C	5 720	144	MCS0	0.04	0.32	0.36	11
	U-NII 3	5 720	144	MCS0	-1.90	0.32	-1.58	30
11n_HT40	U-NII 2C	5 710	142	MCS0	-7.56	0.60	-6.96	11
	U-NII 3	5 710	142	MCS0	-9.61	0.60	-9.01	30
11ac_VHT80	U-NII 2C	5 690	138	MCS0	-12.78	1.14	-11.64	11
	U-NII 3	5 690	138	MCS0	-15.51	1.14	-14.37	30

Note :

Final PPSD = Measured PPSD + Duty Factor

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

802.11a (Band 1)

Low Channel (5 180 MHz)

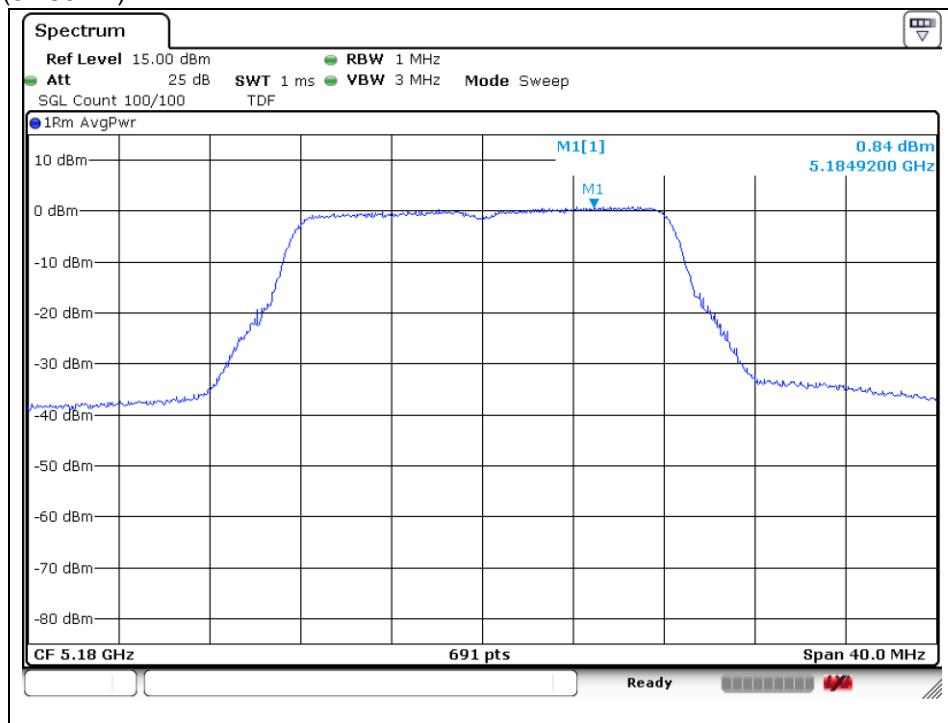

Middle Channel (5 220 MHz)

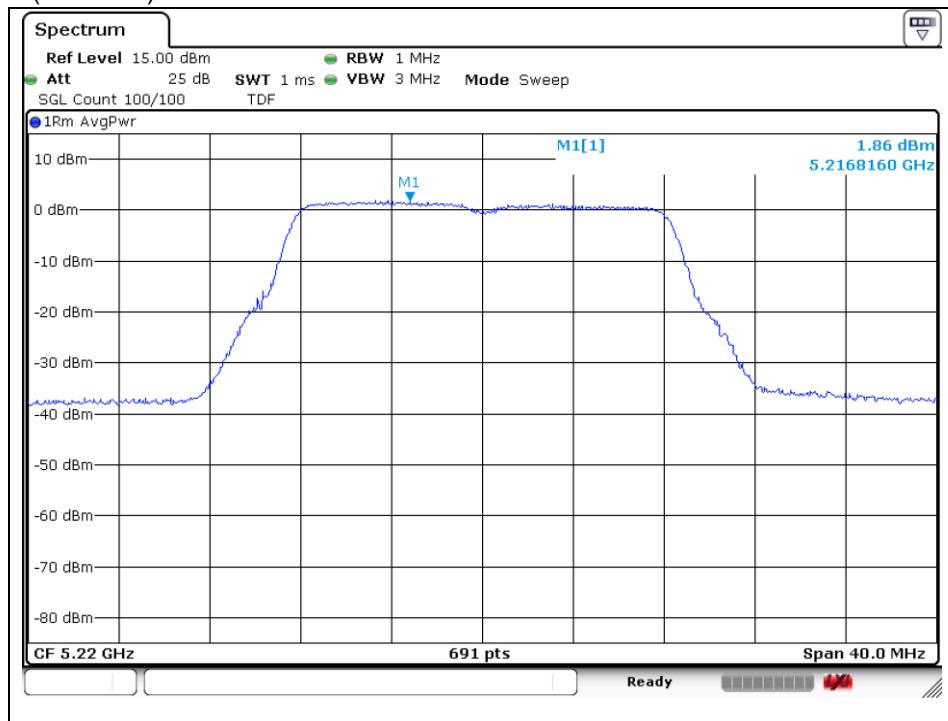

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

High Channel (5.240 MHz)

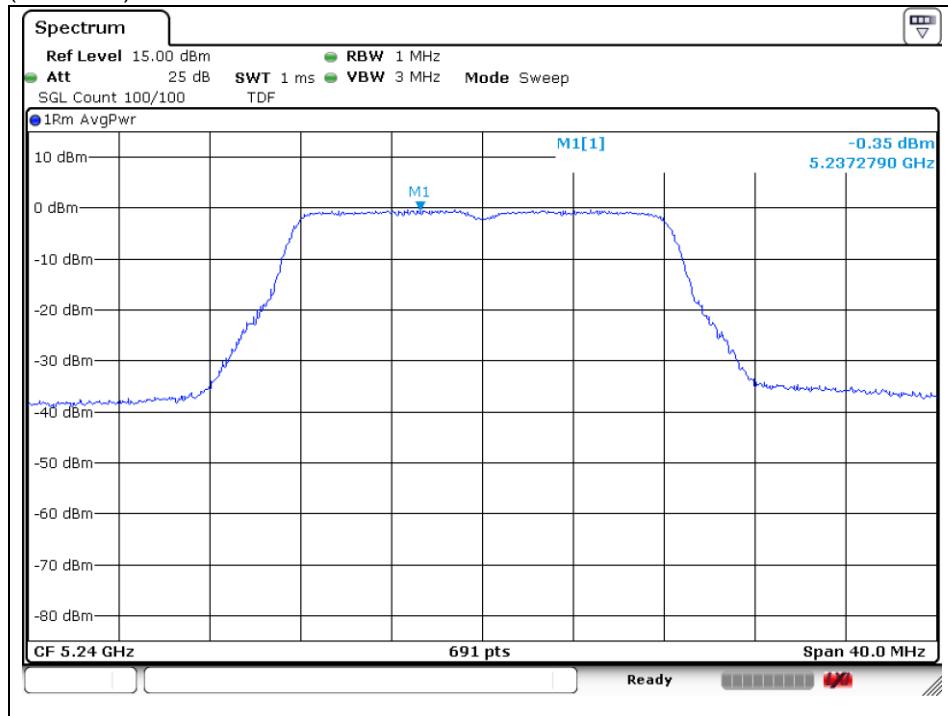

802.11a (Band 2A)

Low Channel (5.260 MHz)

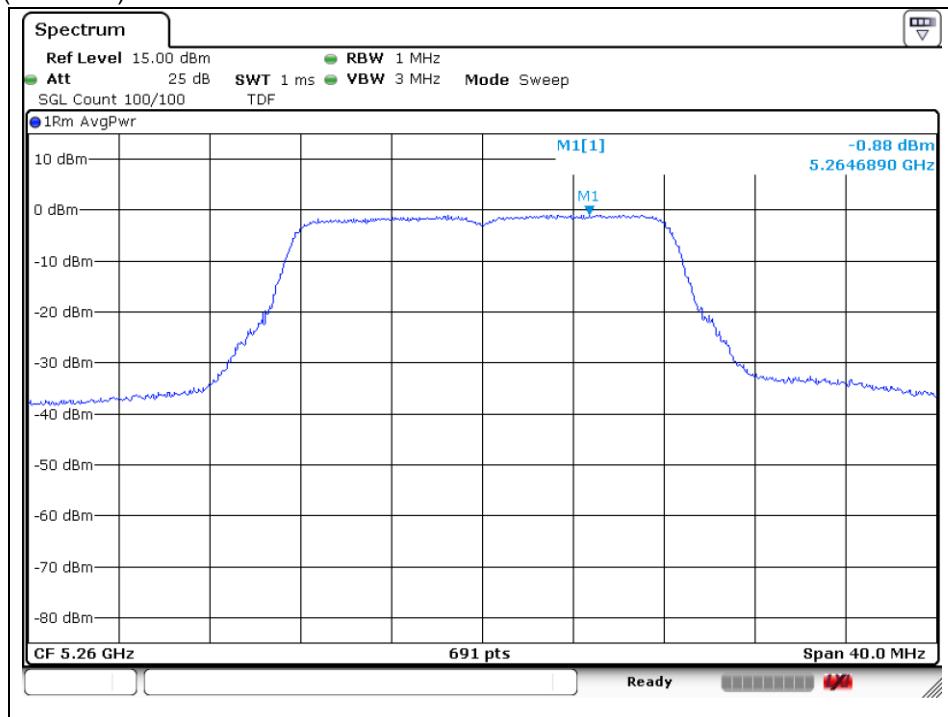

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

Middle Channel (5 300 MHz)

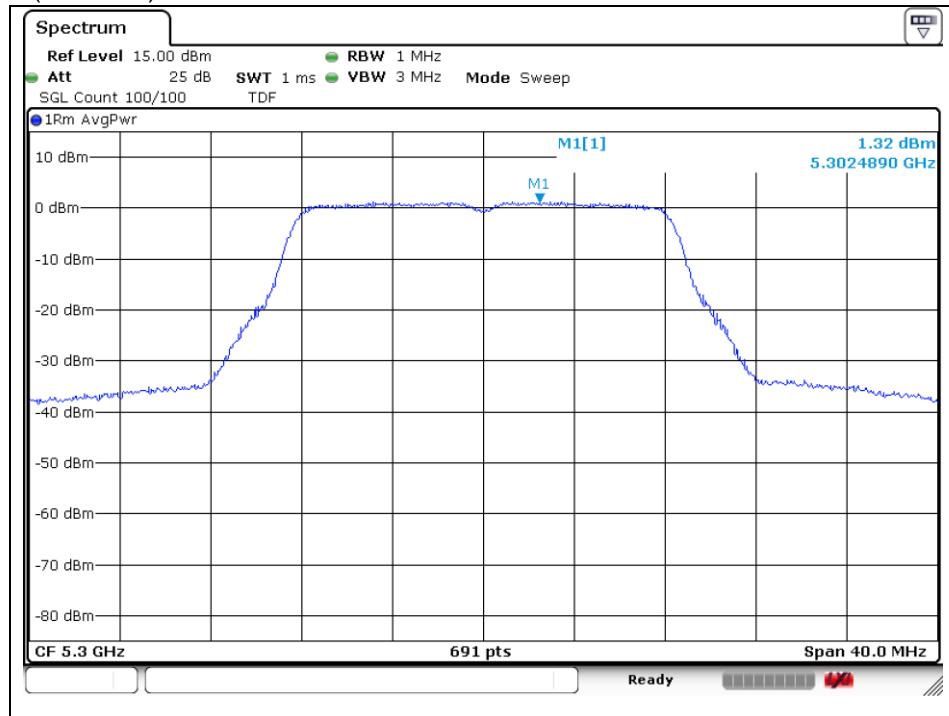

High Channel (5 320 MHz)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

802.11a (Band 2C)

Low Channel (5 500 MHz)

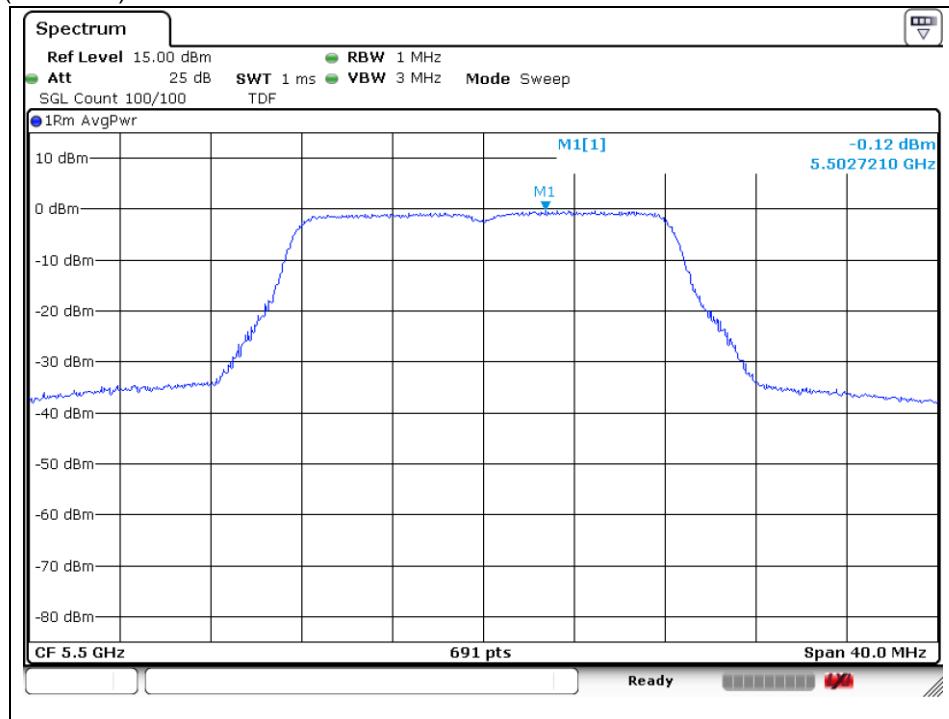

Middle Channel (5 580 MHz)

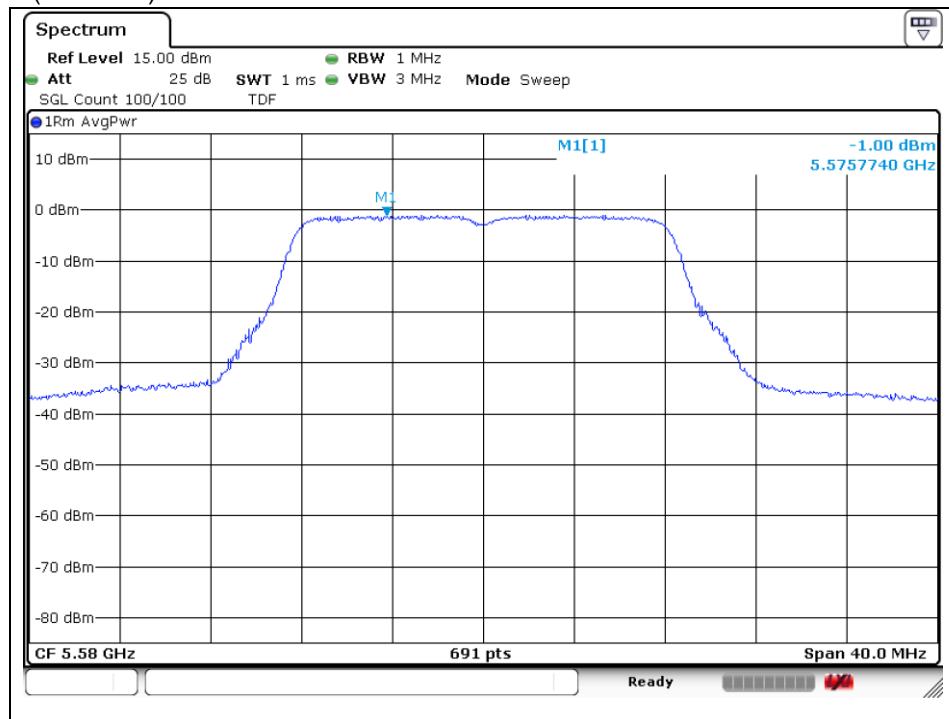

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

High Channel (5 700 MHz)

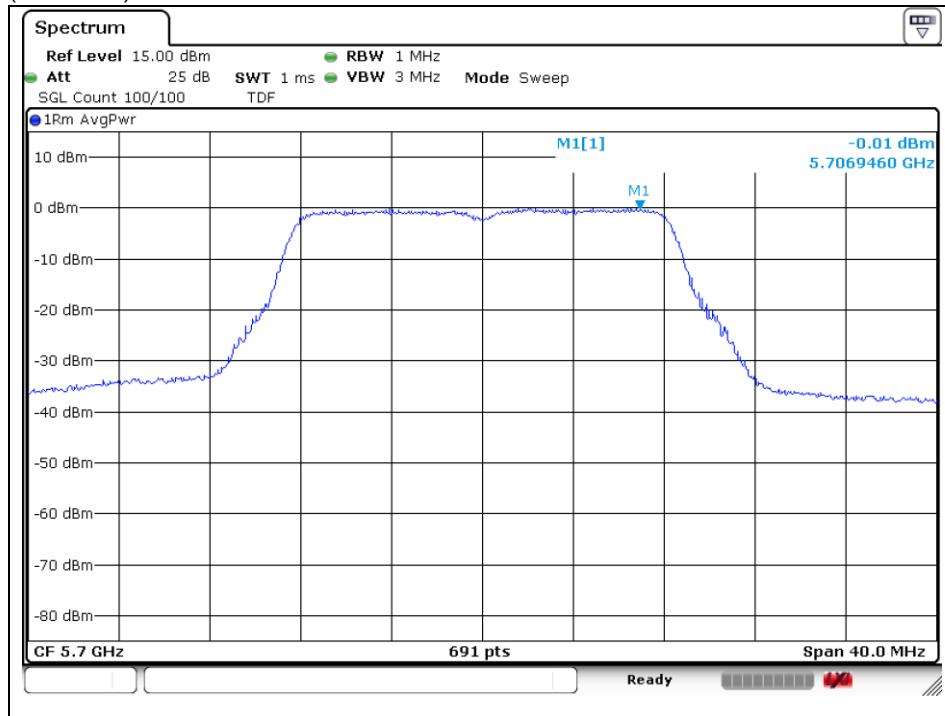

802.11a (Band 3)

Low Channel (5 745 MHz)

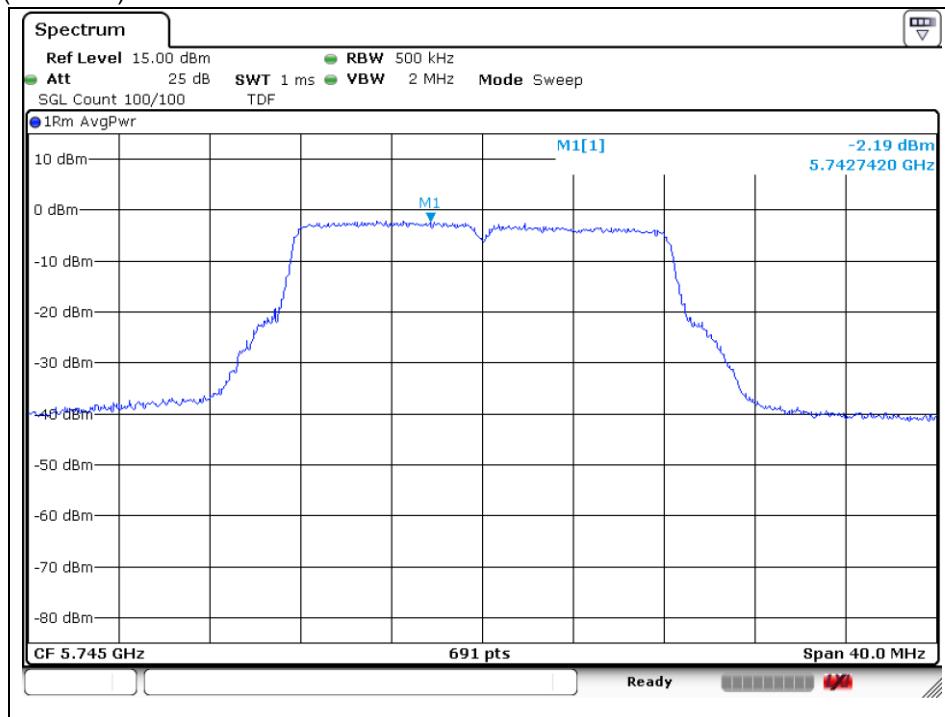

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

Middle Channel (5 785 MHz)

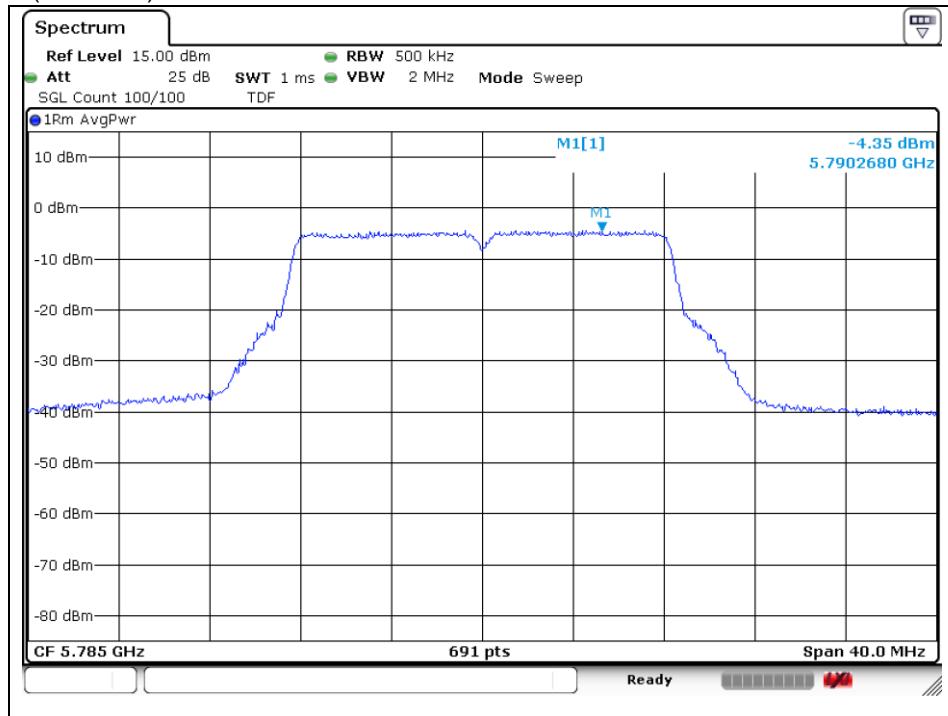

High Channel (5 825 MHz)

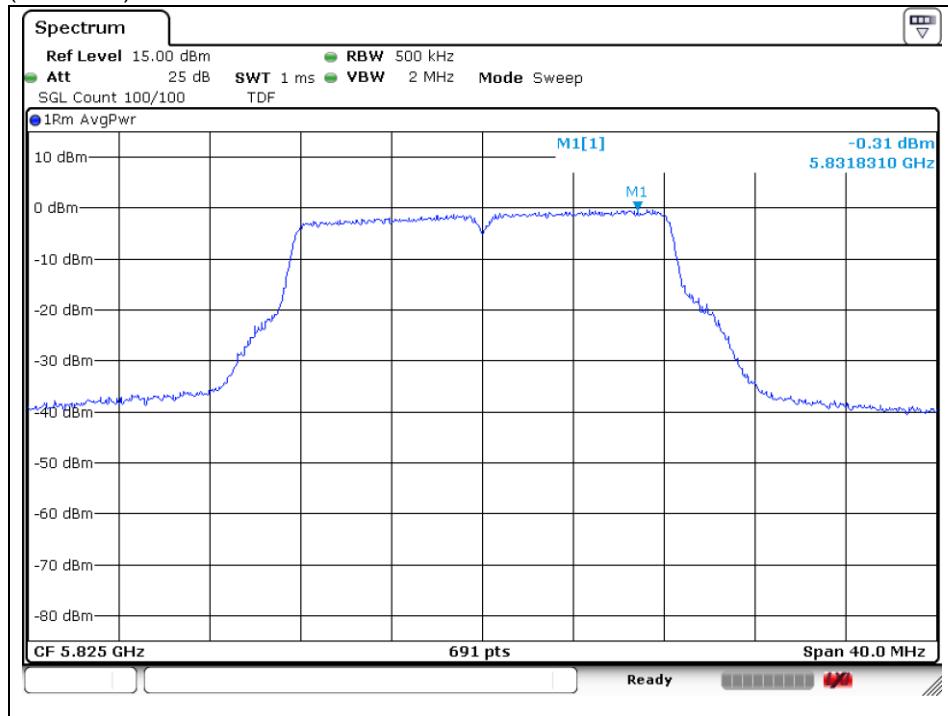

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

802.11n_HT20 (Band 1)

Low Channel (5 180 MHz)

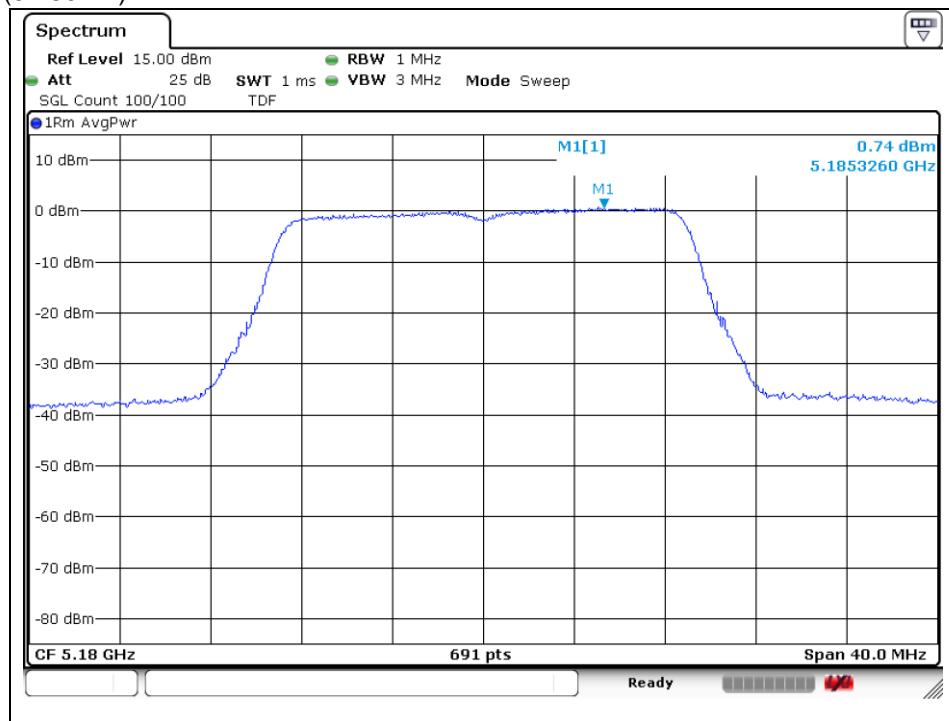

Middle Channel (5 220 MHz)

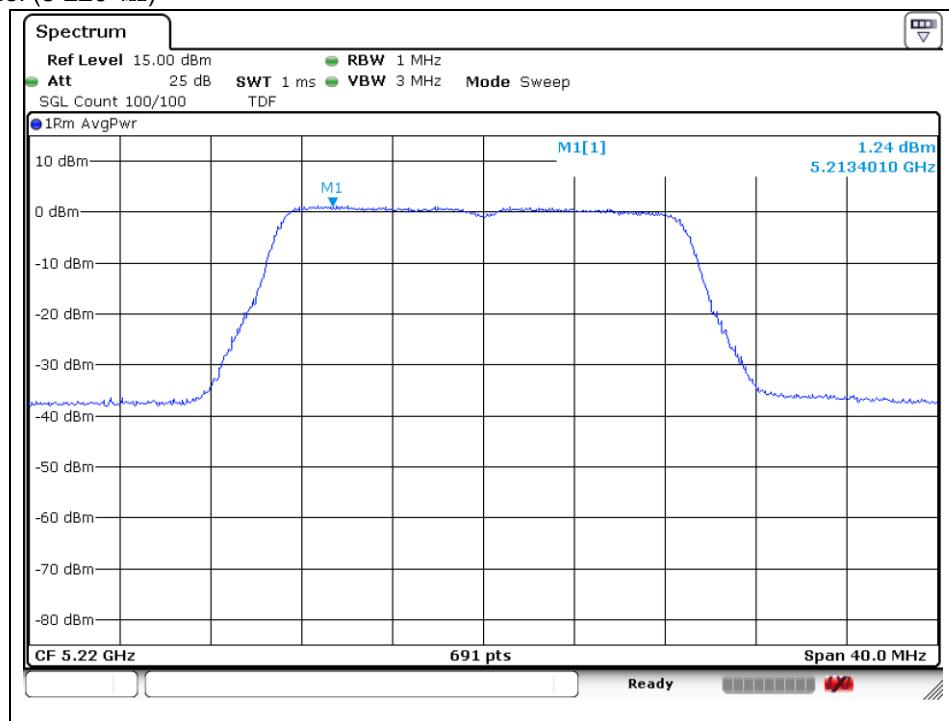

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

High Channel (5.240 MHz)

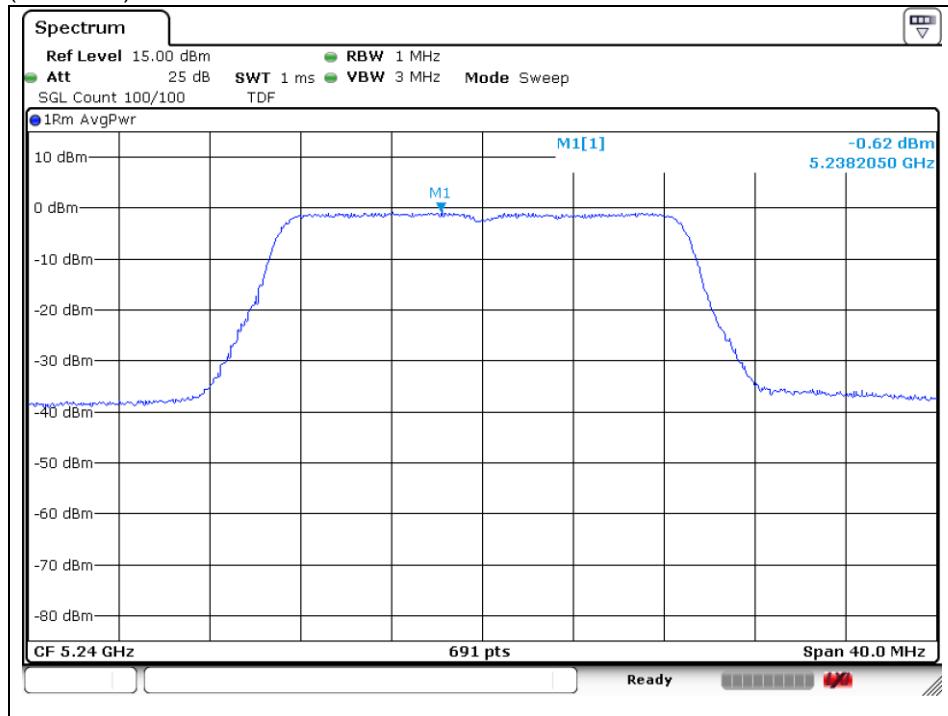

802.11n_HT20 (Band 2A)

Low Channel (5.260 MHz)

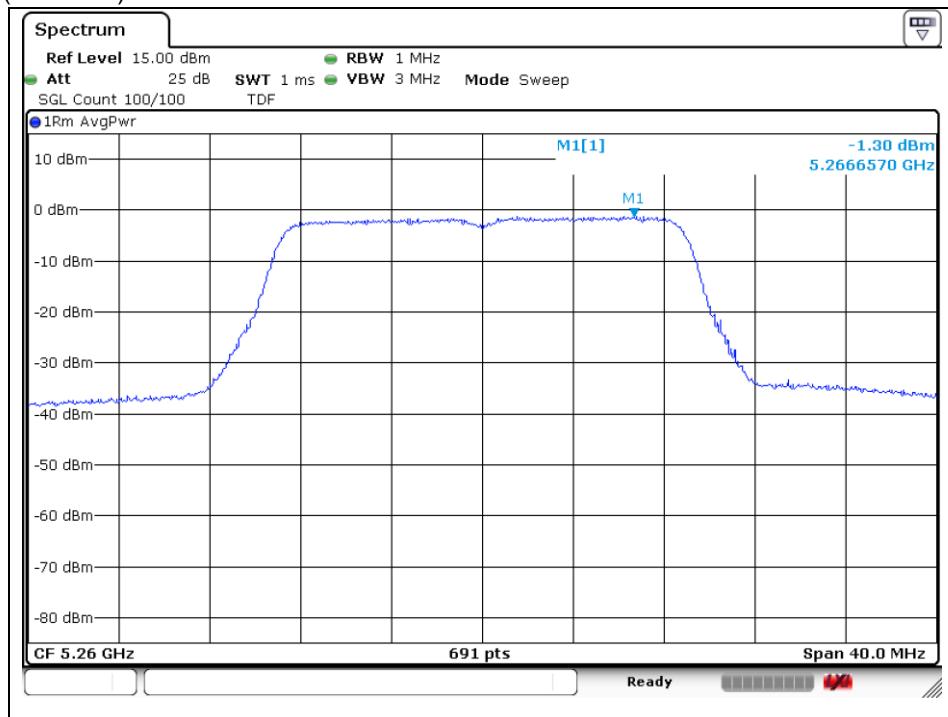

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

Middle Channel (5 300 MHz)



High Channel (5 320 MHz)

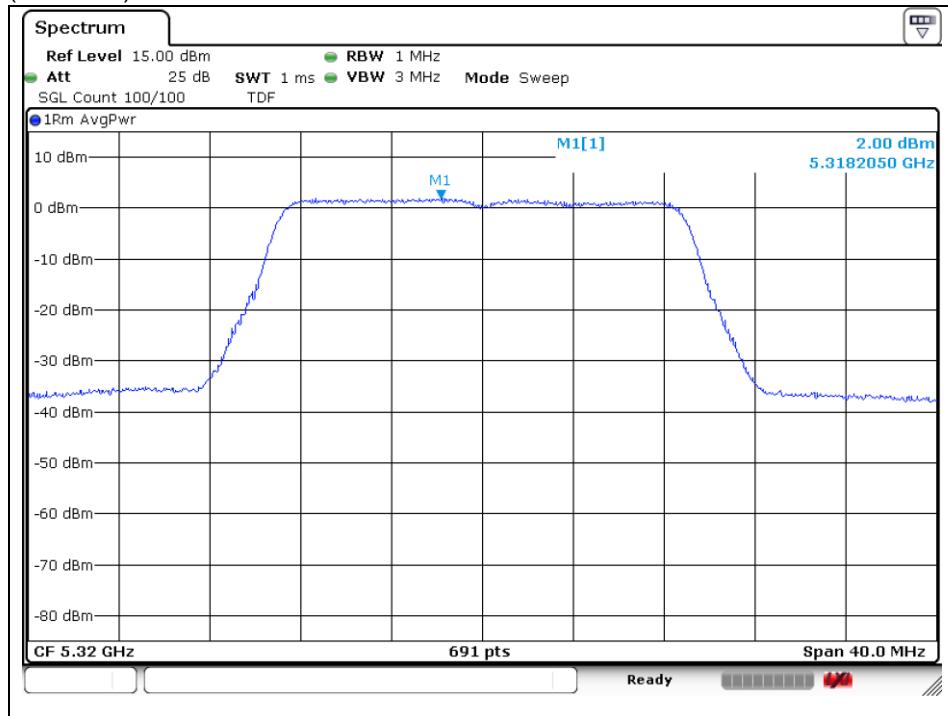

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

802.11n_HT20 (Band 2C)

Low Channel (5 500 MHz)

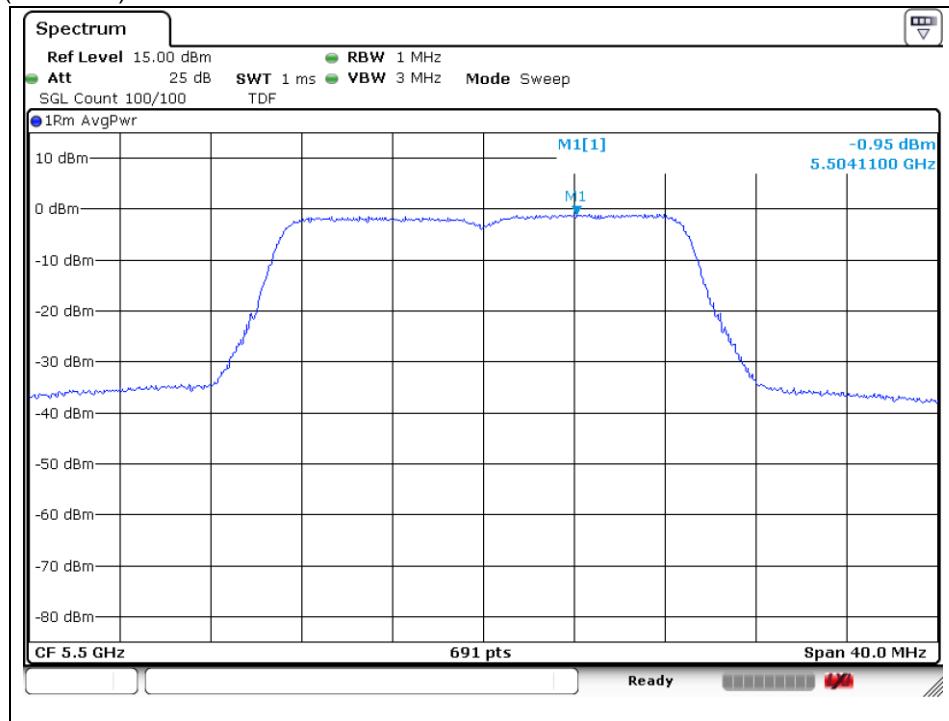

Middle Channel (5 580 MHz)

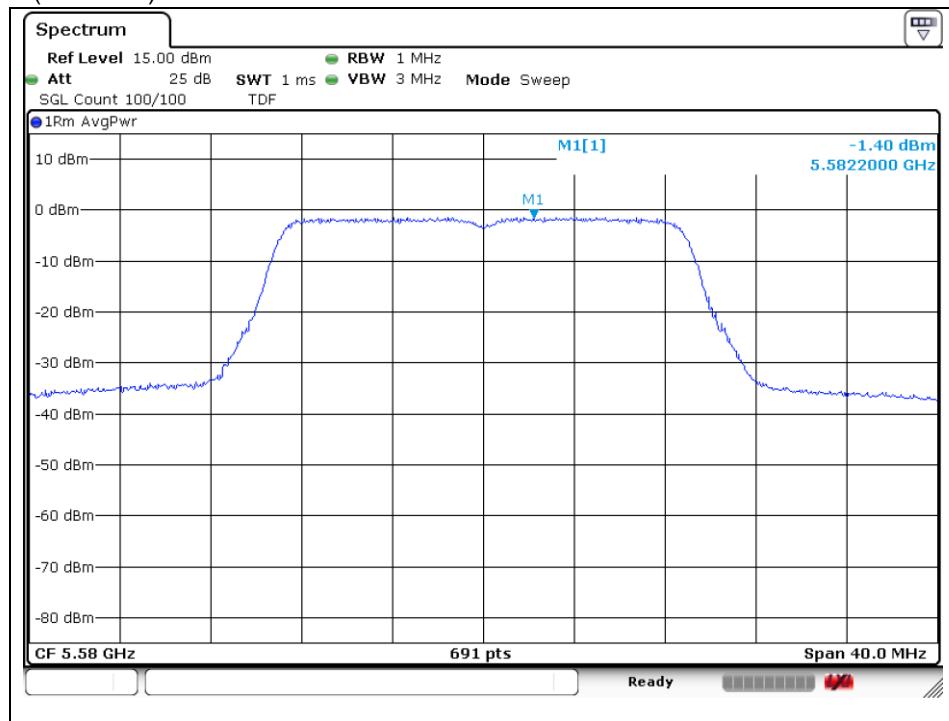

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

High Channel (5 700 MHz)

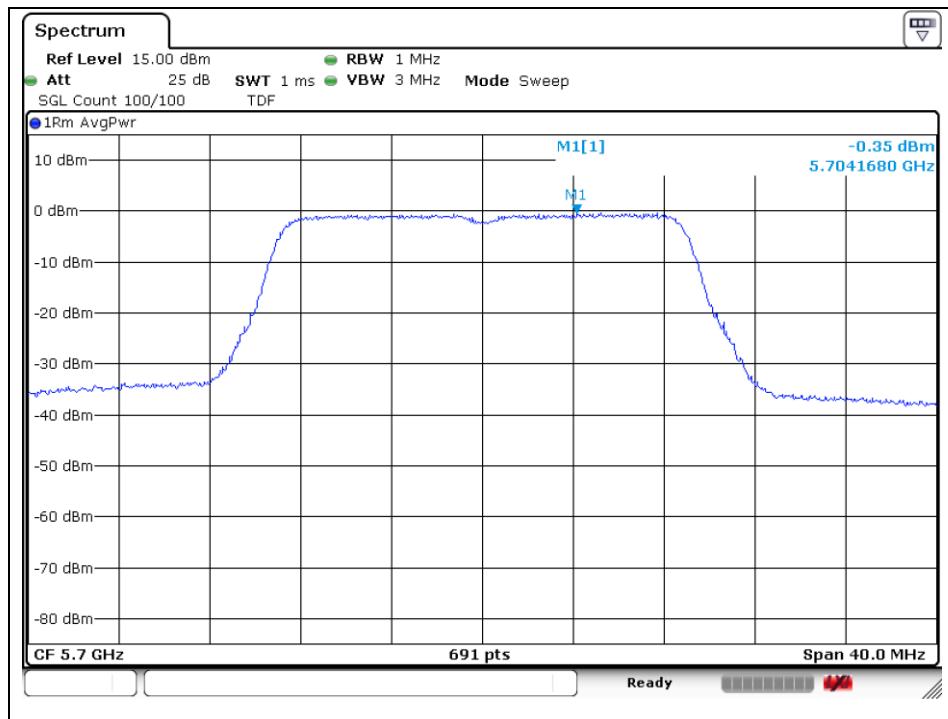

802.11n_HT20 (Band 3)


Low Channel (5 745 MHz)

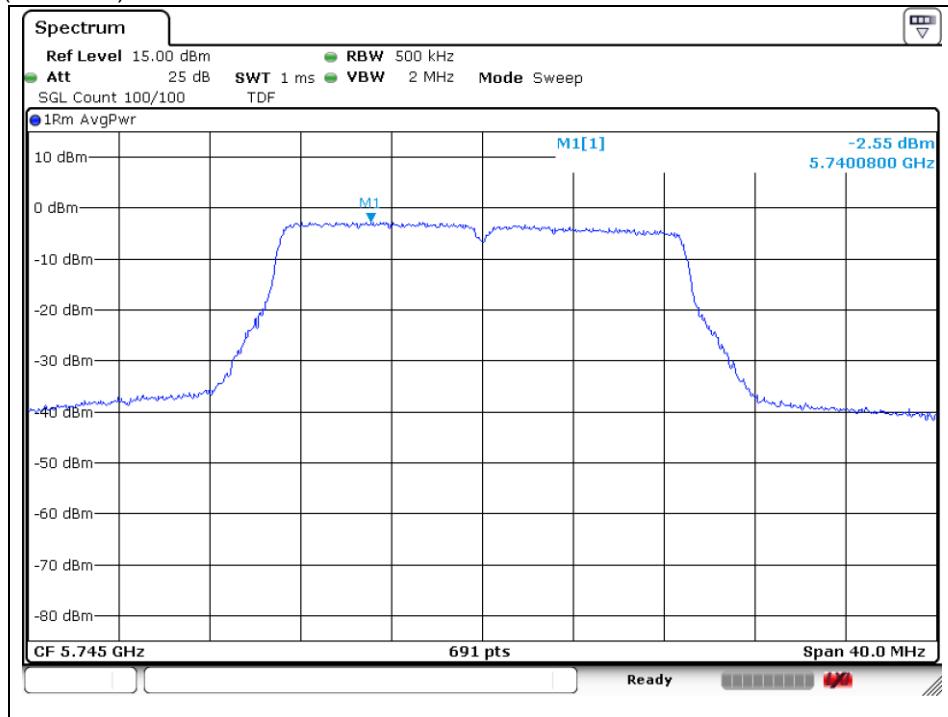


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

Middle Channel (5 785 MHz)

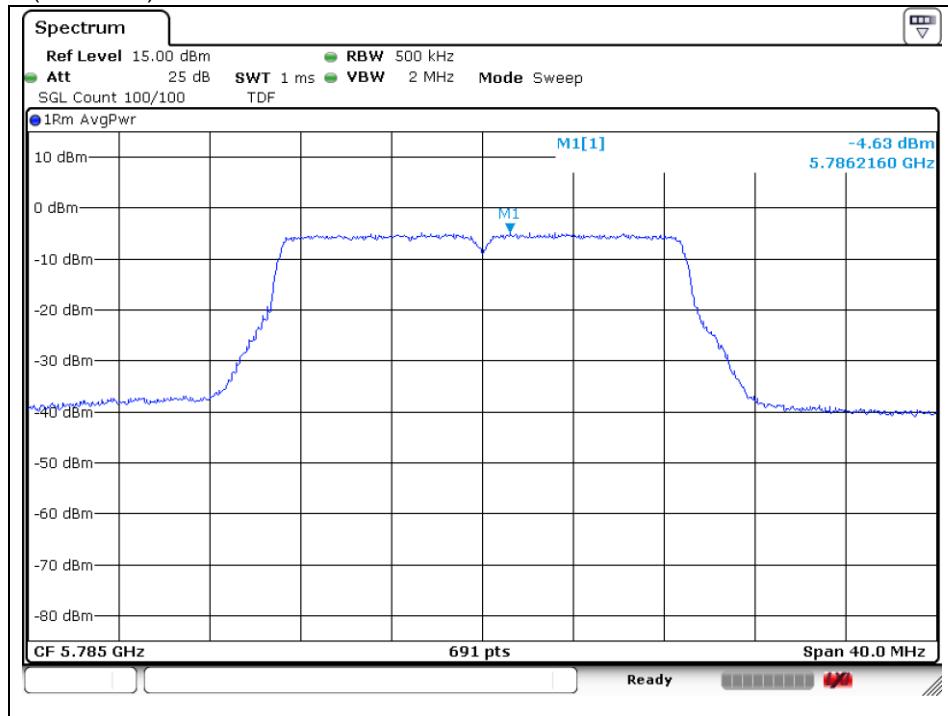

High Channel (5 825 MHz)

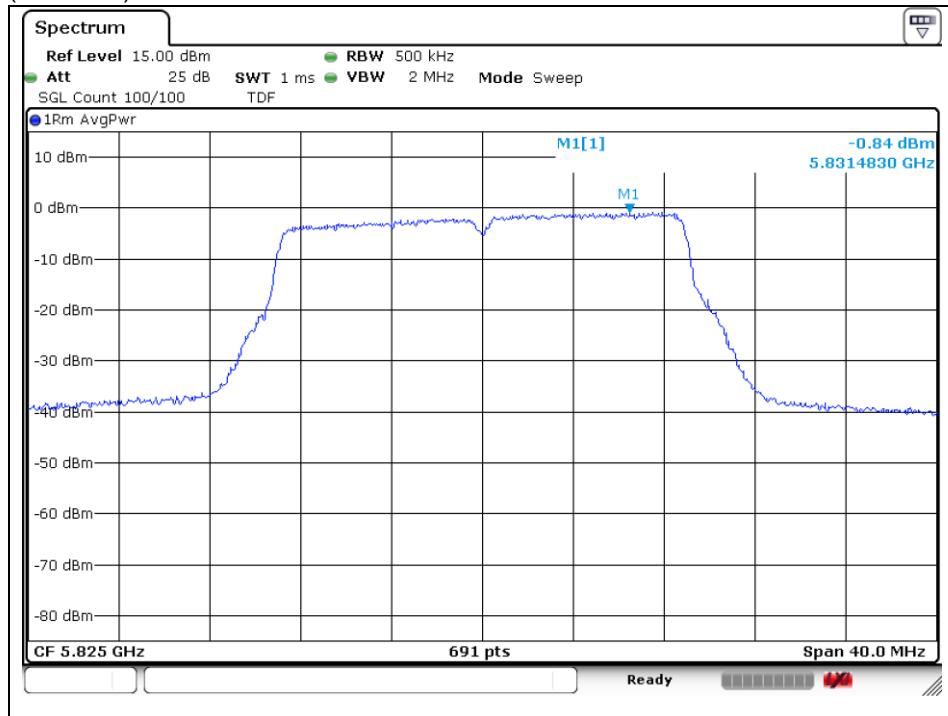

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

802.11n_HT40 (Band 1)

Low Channel (5 190 MHz)

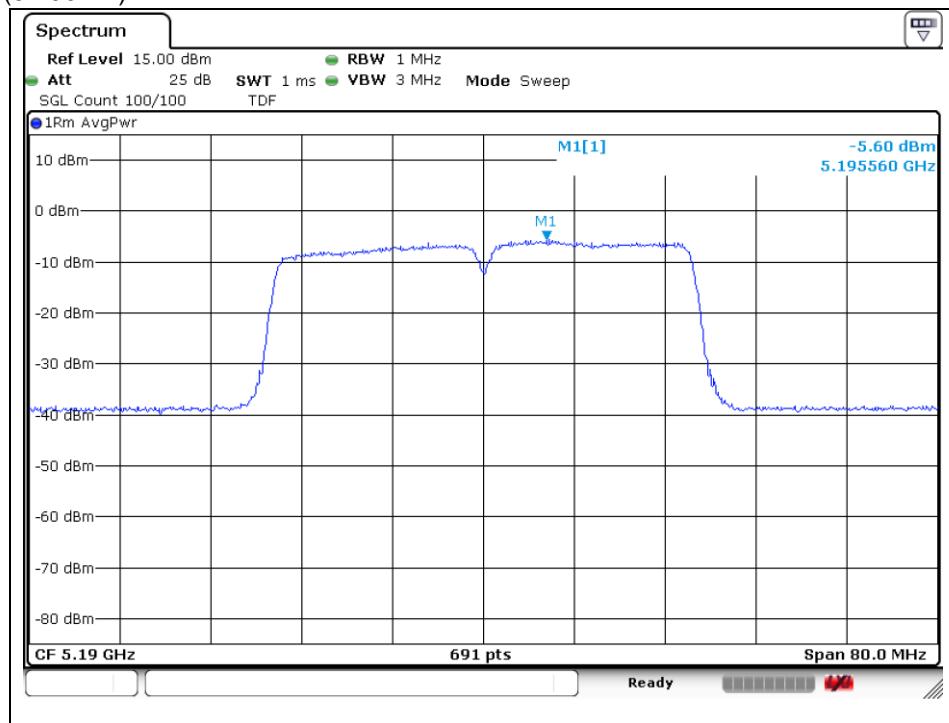

High Channel (5 230 MHz)

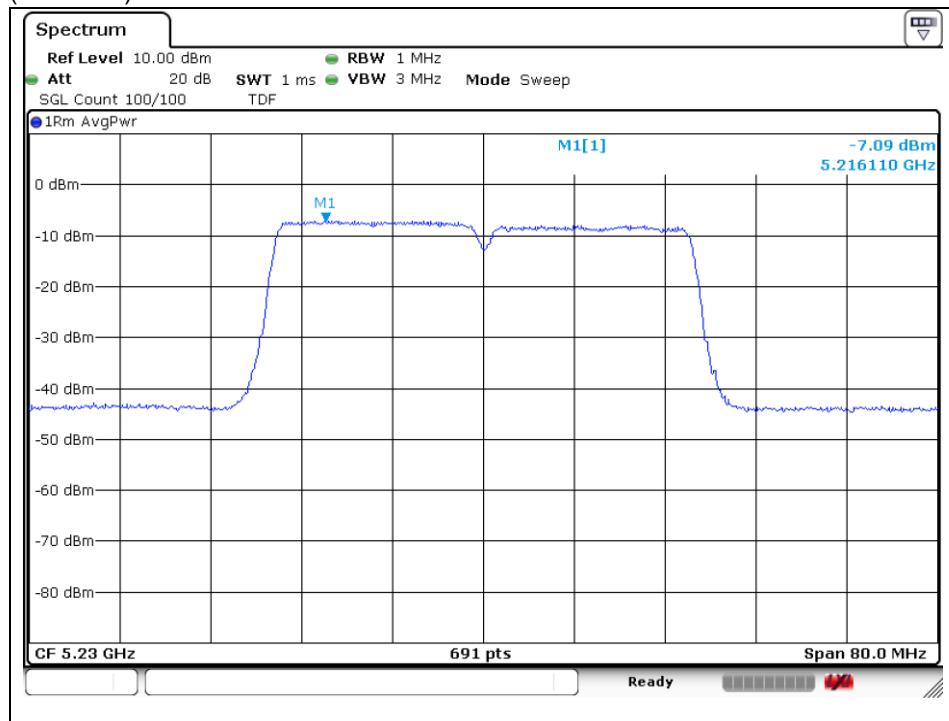

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

802.11n_HT40 (Band 2A)

Low Channel (5 270 MHz)

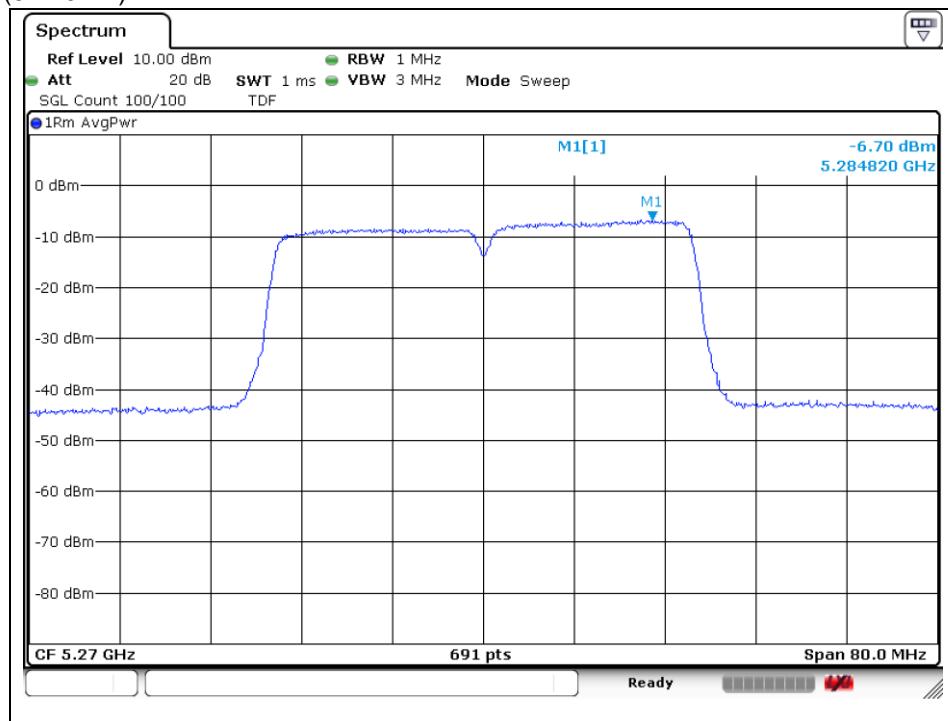

High Channel (5 310 MHz)

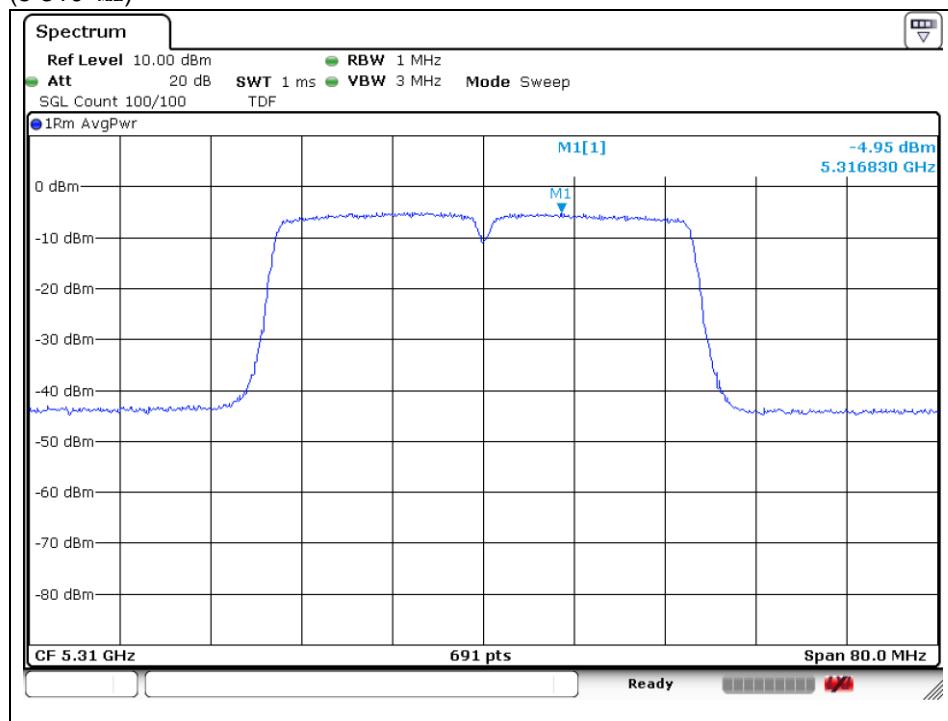

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

802.11n_HT40 (Band 2C)

Low Channel (5 510 MHz)

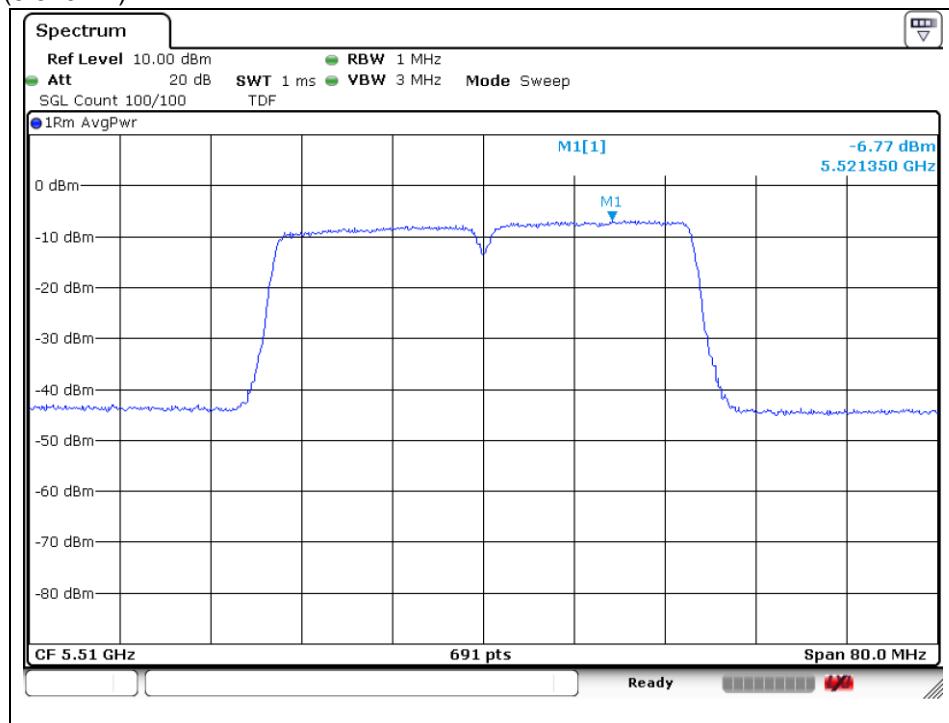

Middle Channel (5 550 MHz)

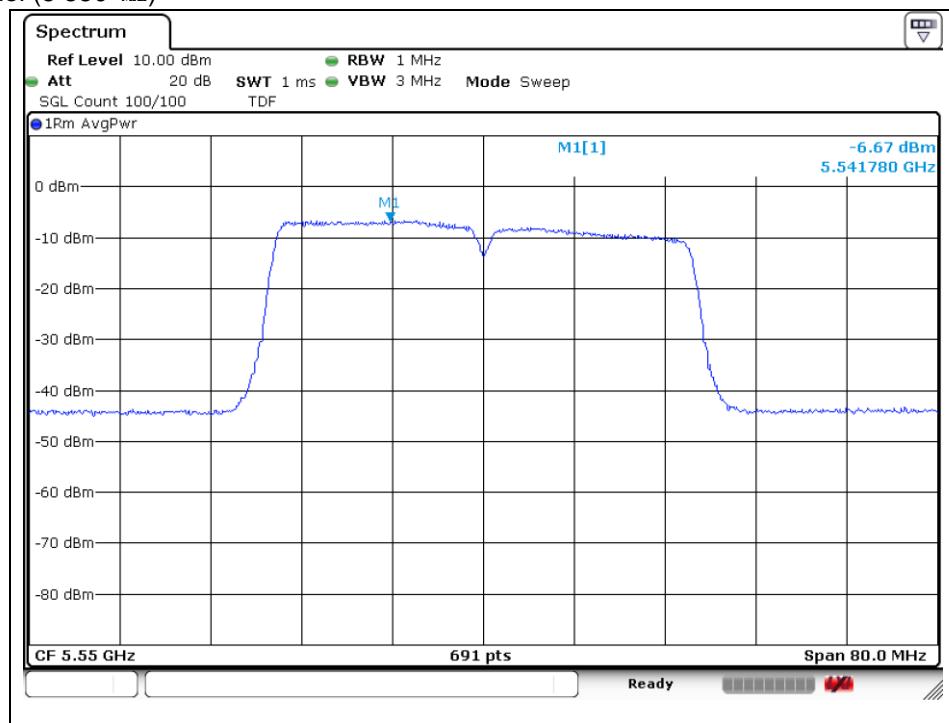

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

High Channel (5 670 MHz)

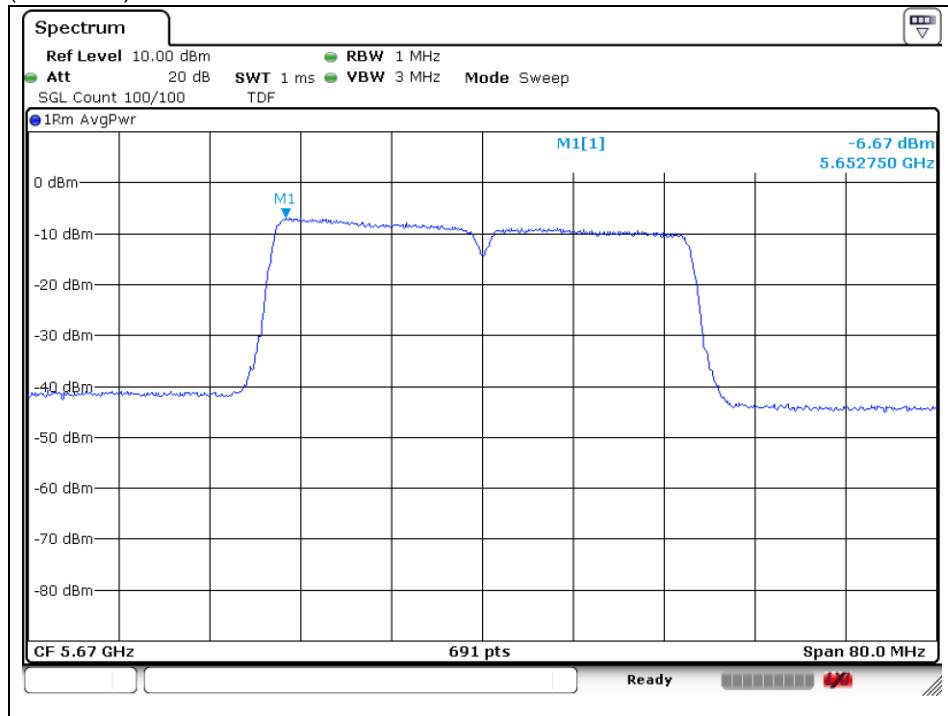

802.11n_HT40 (Band 3)

Low Channel (5 755 MHz)

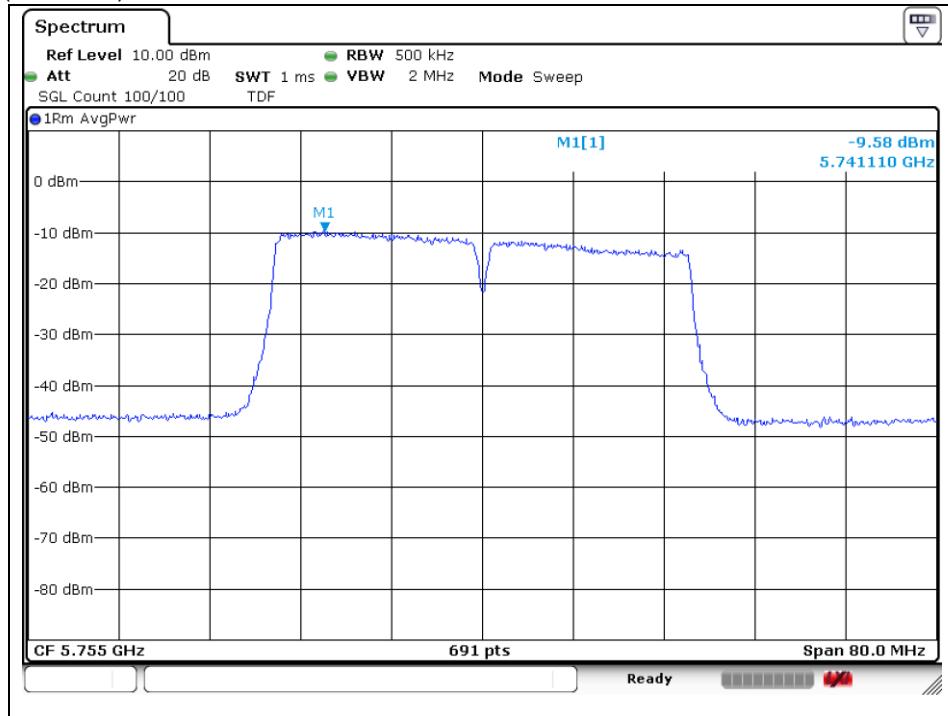

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

High Channel (5 795 MHz)

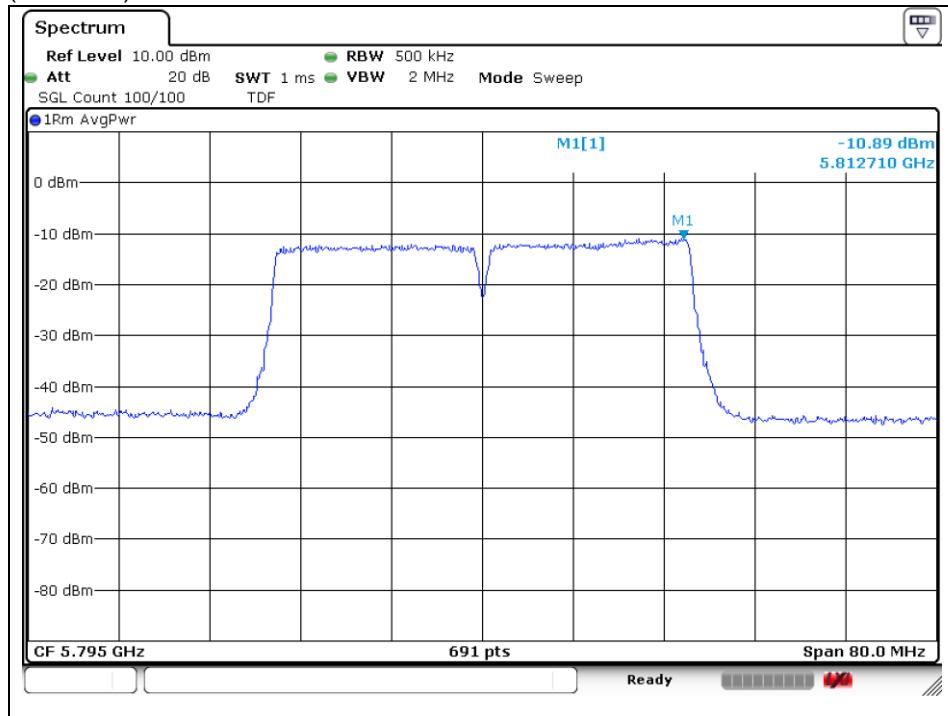

802.11ac_VHT80 (Band 1)

Middle Channel (5 210 MHz)

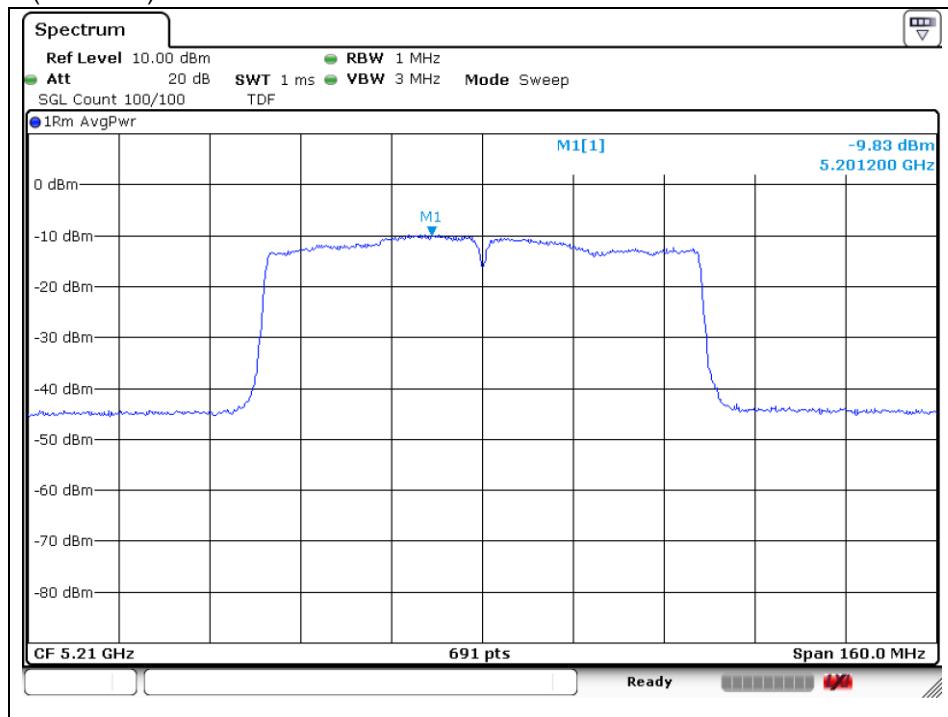


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

802.11ac_VHT80 (Band 2A)

Middle Channel (5 290 MHz)

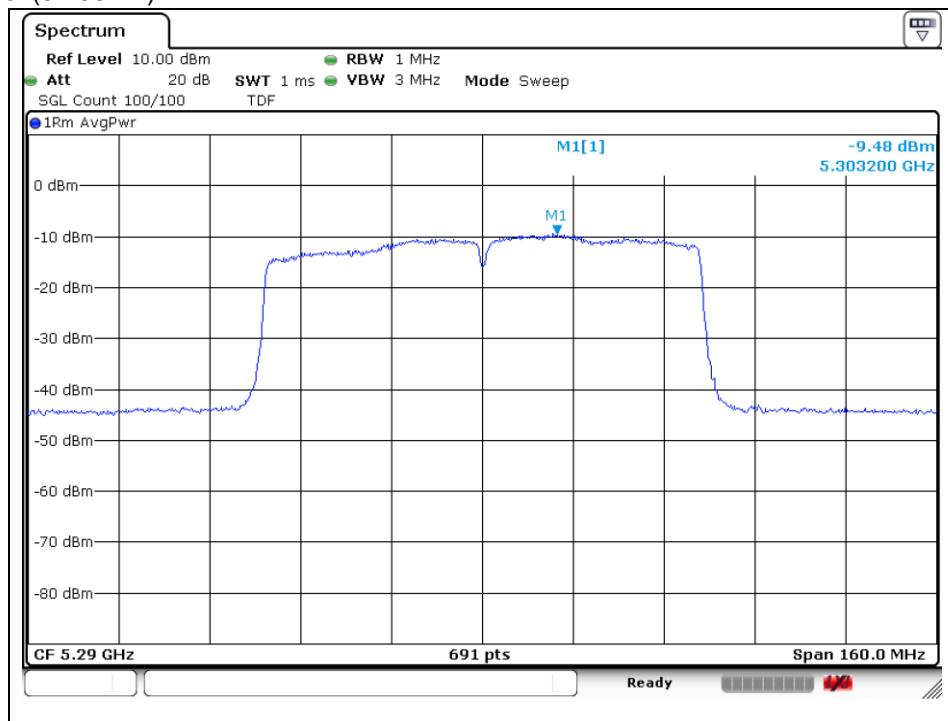**802.11ac_VHT80 (Band 2C)**

Low Channel (5 530 MHz)

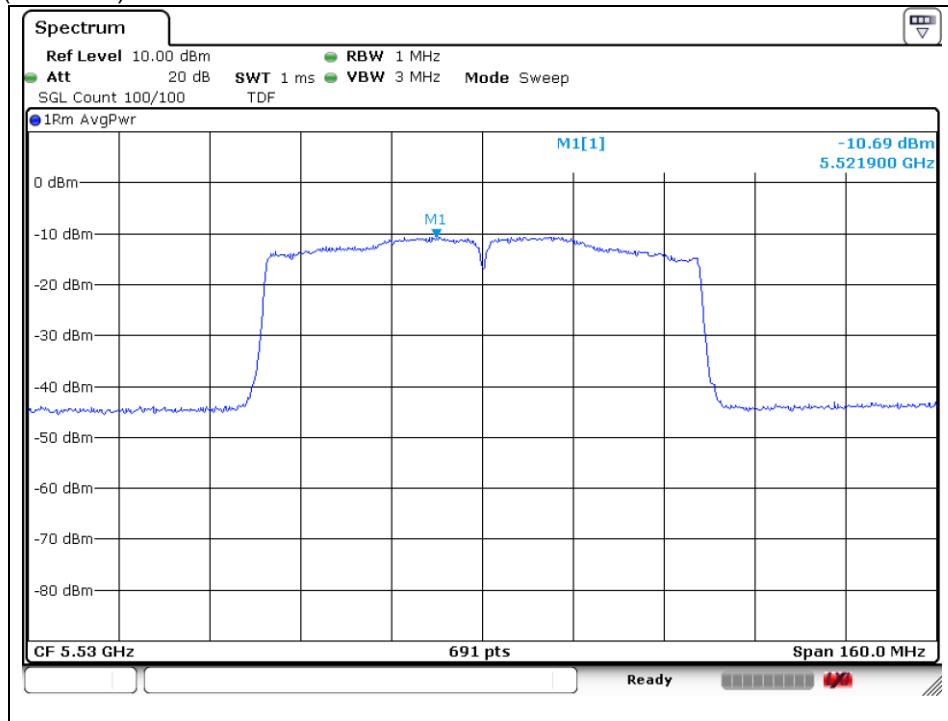

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370


A4(210 mm x 297 mm)

High Channel (5 690 MHz)

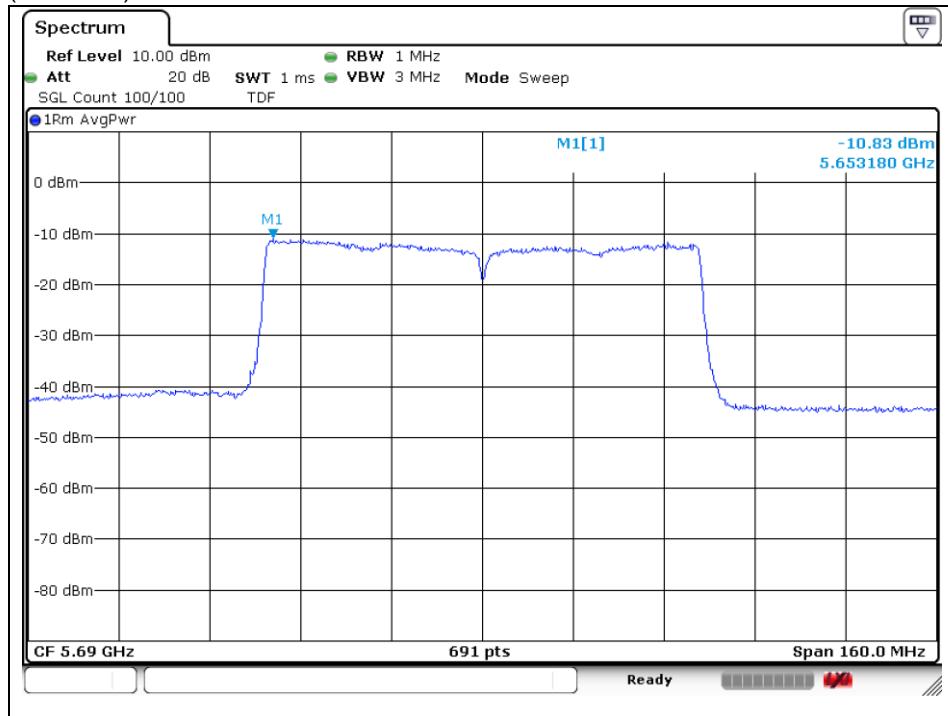



802.11ac_VHT80 (Band 3)

Middle Channel (5 775 MHz)

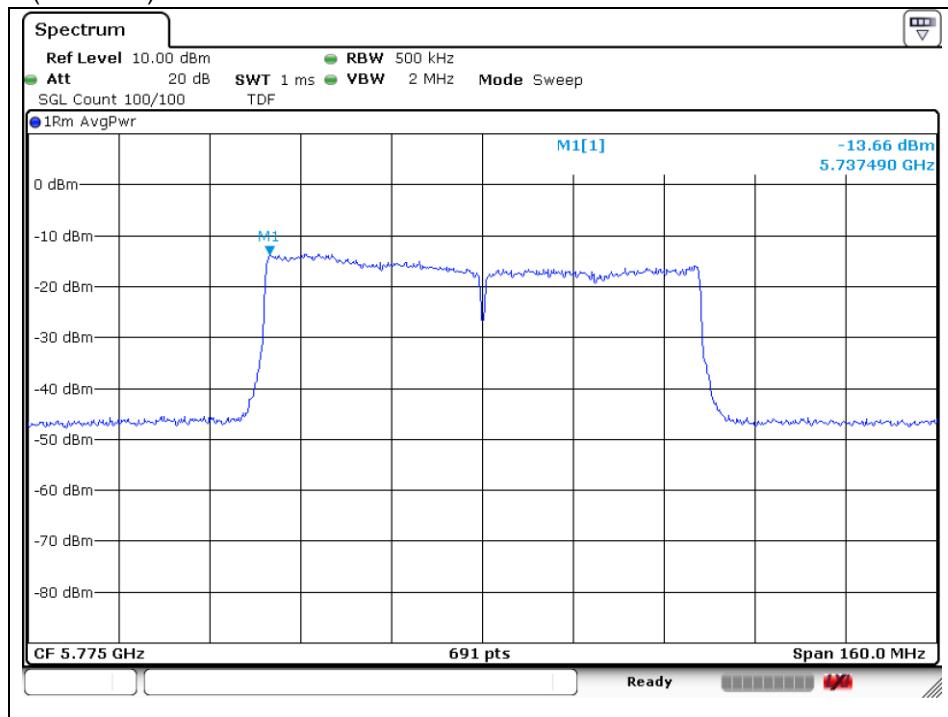

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

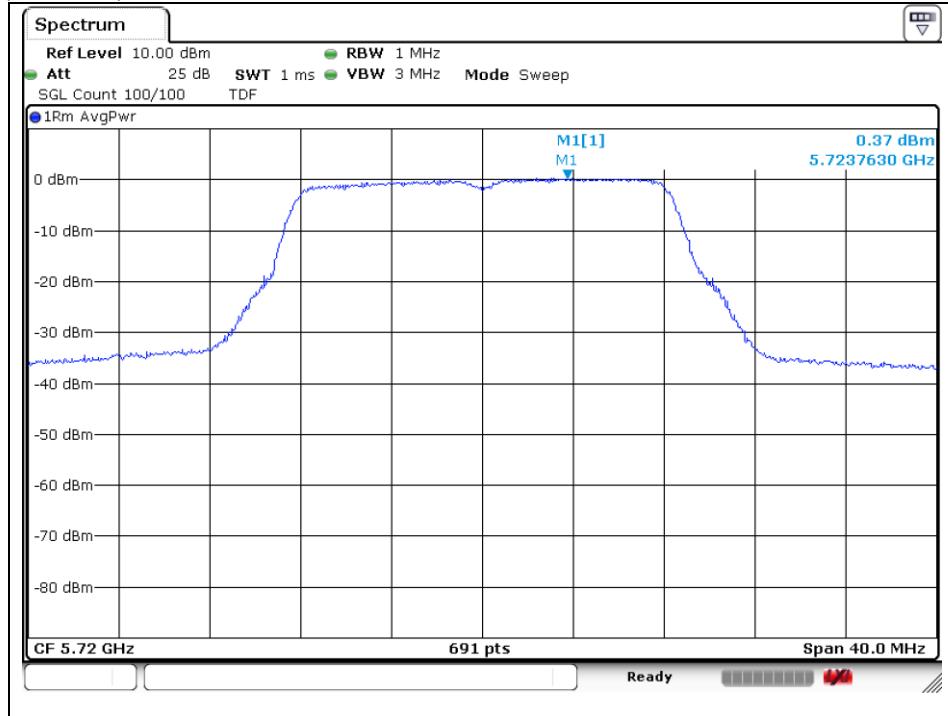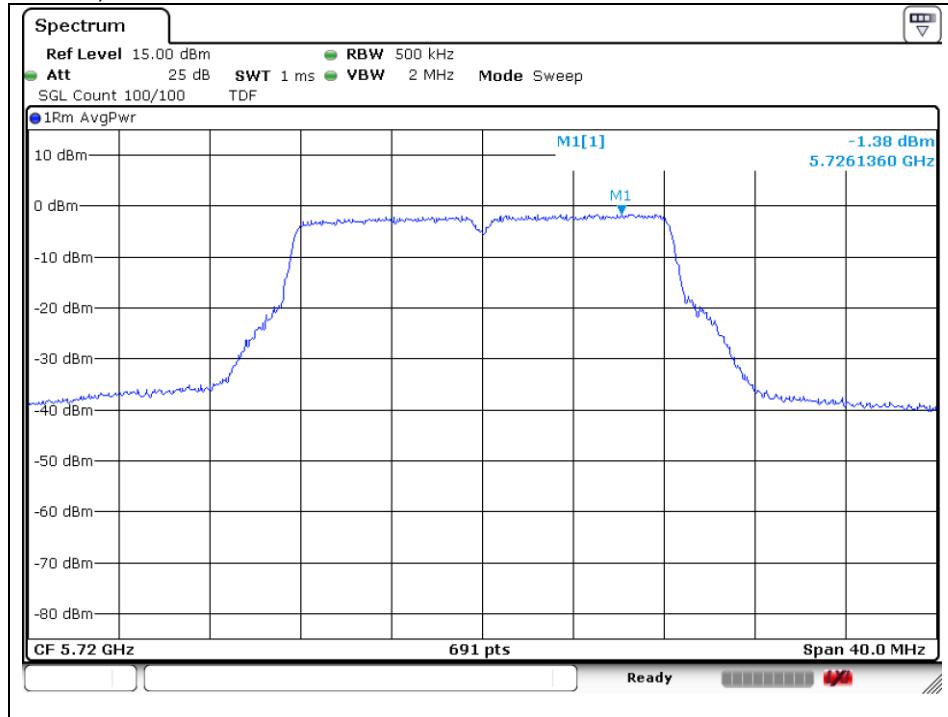Band-crossing channels**U-NII 2C 11a (5.720 GHz)****U-NII 3 11a (5.720 GHz)**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

U-NII 2C 11n_HT20 (5 720 MHz)

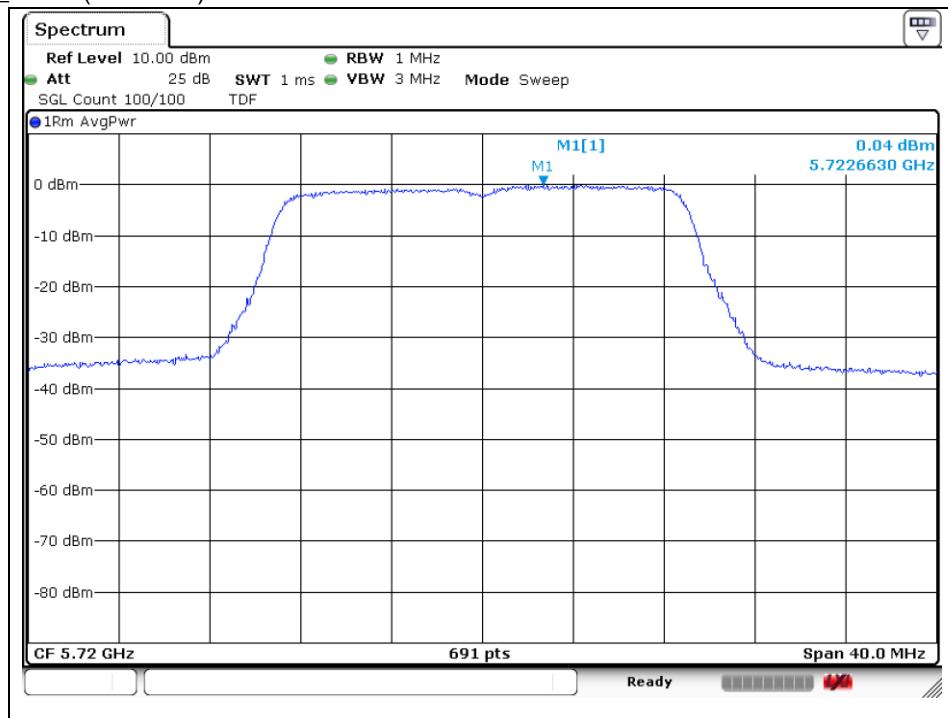

U-NII 3 11n_HT20 (5 720 MHz)

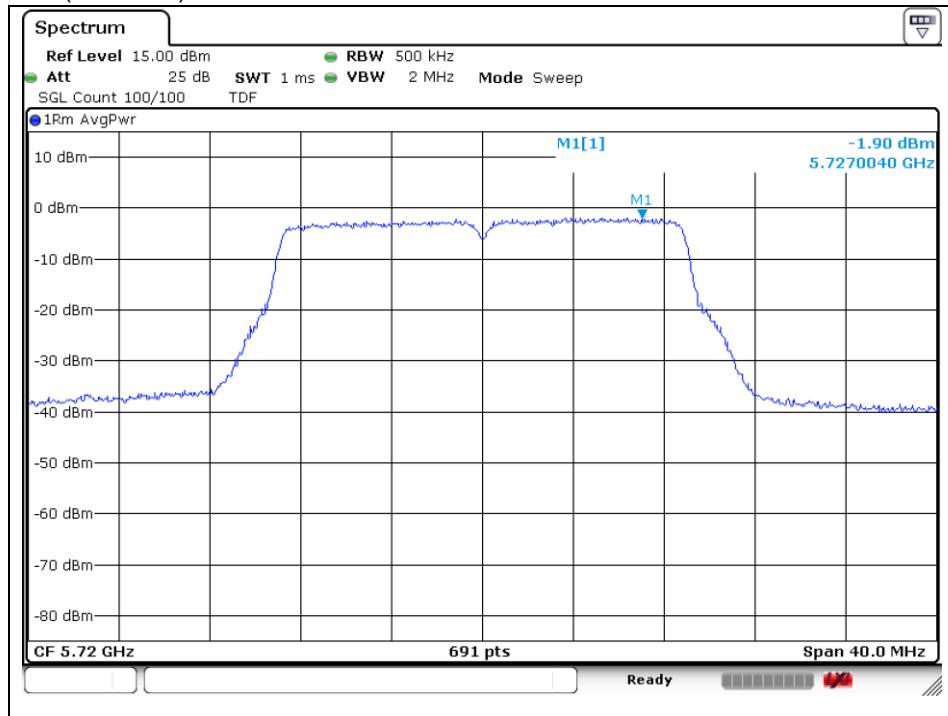

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

U-NII 2C 11n_HT40 (5.710 GHz)

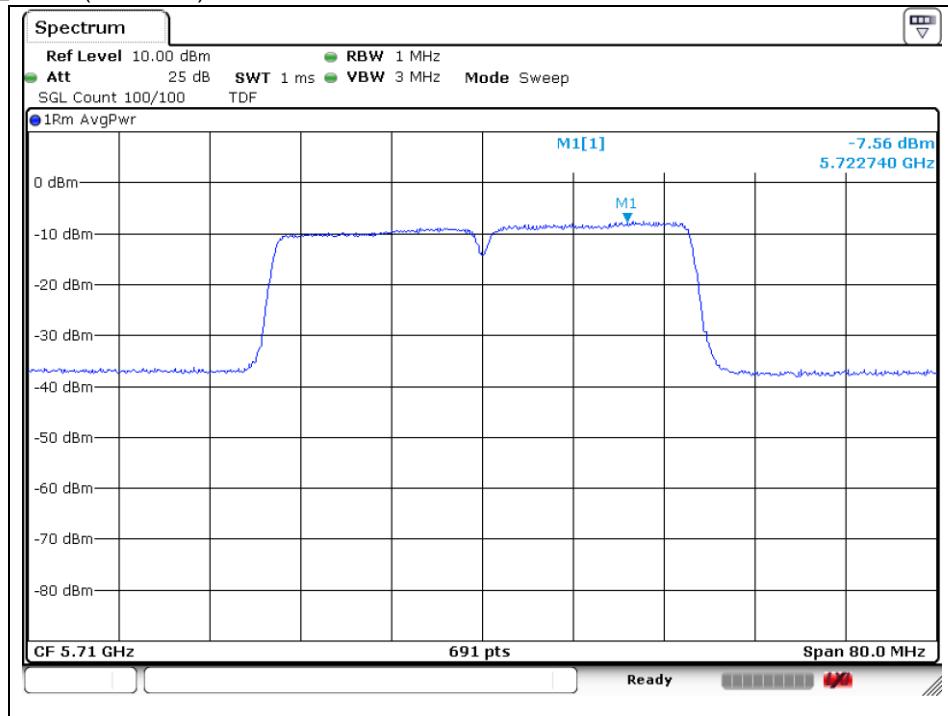

U-NII 3 11n_HT40 (5.710 GHz)

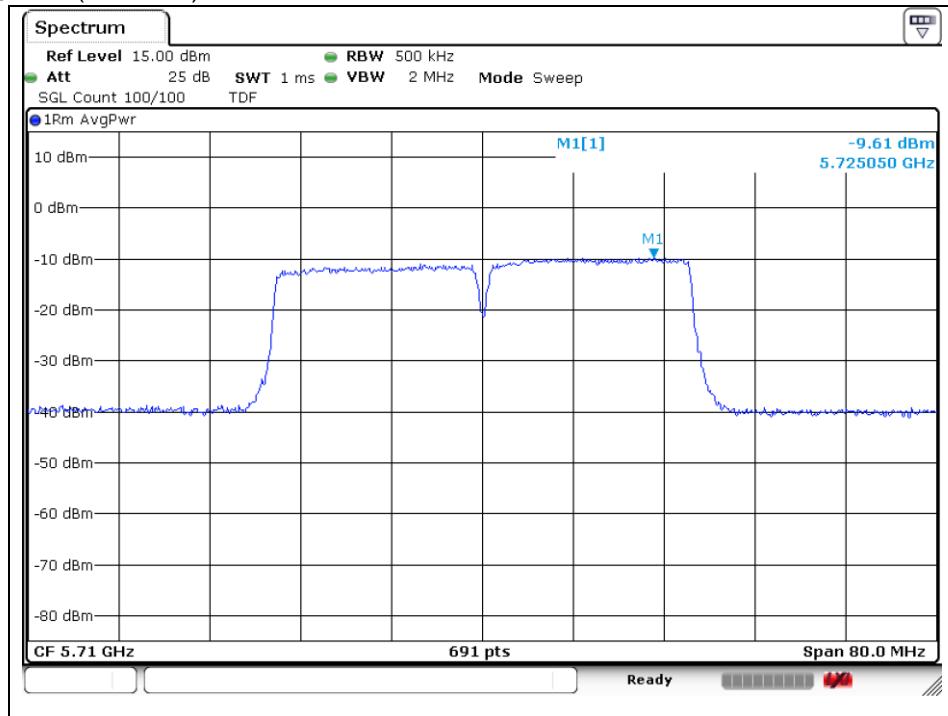

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

U-NII 2C 11ac VHT80 (5.690 MHz)

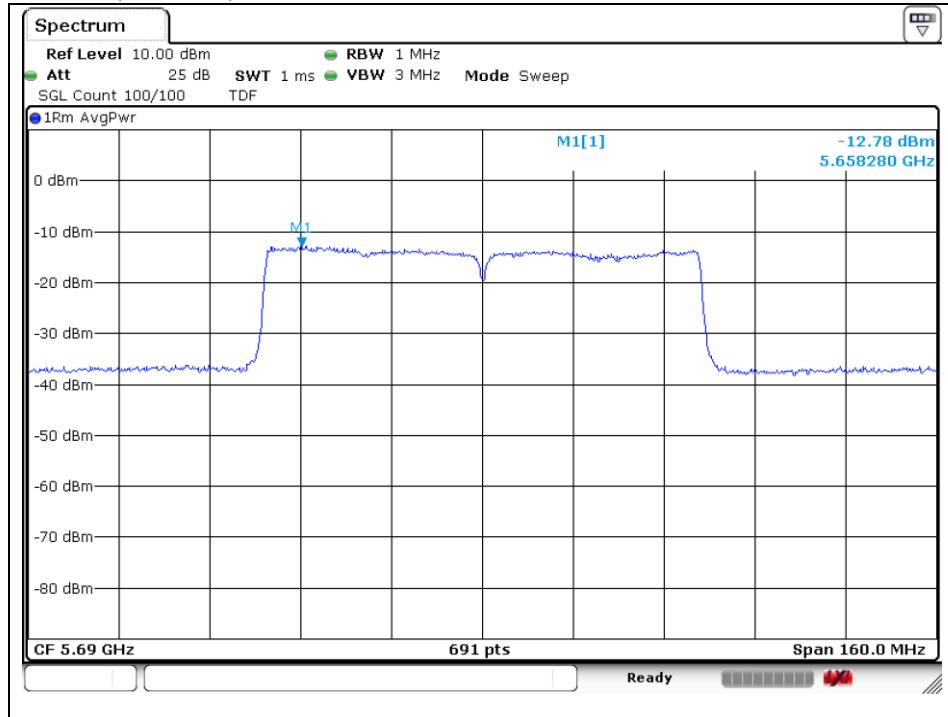

U-NII 3 11ac VHT80 (5.690 MHz)

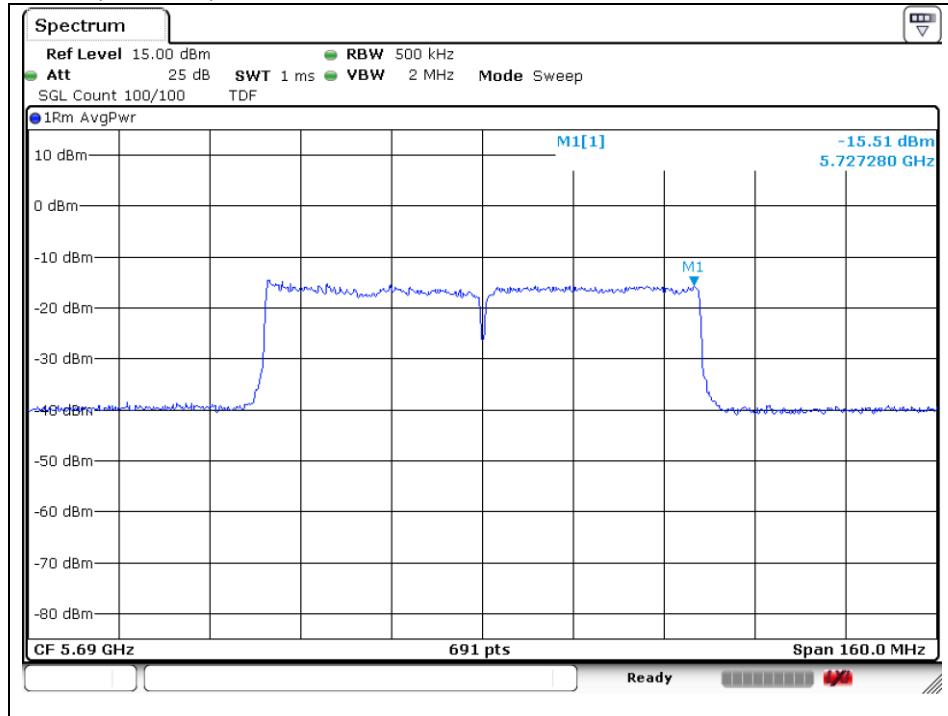

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

7. Antenna Requirement

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.407 (a) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

7.2. Antenna Connected Construction

Antenna used in this product is Internal Antenna and peak max gain of antenna as below.

Band	5 150 MHz – 5 350 MHz	5 470 MHz – 5 725 MHz	5 725 MHz – 5 850 MHz
Mode	11a/n_HT20, HT40, 11ac_VHT20, VHT40, VHT80		
Gain	1.42 dB i	-0.85 dB i	-2.39 dB i

- End of the Test Report -

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)