

3. 26 dB Bandwidth & 99 % Bandwidth

3.1. Test Setup



3.2. Limit

None; for reporting purpose only.

3.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

3.3.1. 26 dB Bandwidth

1. This measurement settings are specified in section II.C.1 of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1 % of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

3.3.2. 99 % Bandwidth

3.3.2.1 FCC

1. This measurement settings are specified in section II.D of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set center frequency to the nominal EUT channel center frequency.
3. Set span = 1.5 times to 5.0 times the OBW.
4. Set RBW = 1 % to 5 % of the OBW.
5. Set VBW $\geq 3 \times$ RBW.
6. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
7. Use the 99 % power bandwidth function of the instrument (if available).
8. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % occupied bandwidth is the difference between these two frequencies.

In the result,

- DFS requirements are not applicable in the 5 150 MHz ~ 5 250 MHz.

Remark;

In case of band crossing channels 138, 142 and 144, the measurement is complied with section III.A of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

3.3.2.2 IC

- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99 % emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99 % emission bandwidth).

3.4. Test Result

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

Test mode: 11a

Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	26 dB Bandwidth (MHz)	99 % Bandwidth (MHz)
U-NII 1	5 180	36	6	21.187	17.308
	5 220	44		21.360	17.424
	5 240	48		21.245	17.540
U-NII 2A	5 260	52		21.245	17.424
	5 300	60		21.534	17.598
	5 320	64		21.476	17.598
U-NII 2C	5 500	100		21.303	17.366
	5 580	116		21.303	17.308
	5 720	144		21.418	17.308
U-NII 3	5 745	149		21.071	17.656
	5 785	157		21.592	17.135
	5 825	165		21.534	17.887

Test mode: 11n_HT20

Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	26 dB Bandwidth (MHz)	99 % Bandwidth (MHz)
U-NII 1	5 180	36	MCS0	21.592	18.350
	5 220	44		21.534	18.292
	5 240	48		21.534	18.234
U-NII 2A	5 260	52		21.766	18.524
	5 300	60		21.939	18.292
	5 320	64		21.650	18.466
U-NII 2C	5 500	100		21.997	18.350
	5 580	116		21.823	18.350
	5 720	144		21.997	18.350
U-NII 3	5 745	149		21.650	18.234
	5 785	157		21.766	18.234
	5 825	165		21.823	18.292

Test mode: 11n_HT40

Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	26 dB Bandwidth (MHz)	99 % Bandwidth (MHz)
U-NII 1	5 190	38	MCS0	40.060	36.237
	5 230	46		40.240	36.353
U-NII 2A	5 270	54		40.410	36.353
	5 310	62		40.170	36.237
U-NII 2C	5 510	102		40.170	36.353
	5 550	110		40.520	36.353
	5 710	142		40.410	36.237
U-NII 3	5 755	151		40.520	36.353
	5 795	159		40.340	36.353

Test mode: 11ac_VHT80

Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	26 dB Bandwidth (MHz)	99 % Bandwidth (MHz)
U-NII 1	5 210	42	MCS1	81.970	75.948
U-NII 2A	5 290	58		81.970	75.716
U-NII 2C	5 530	106		81.510	75.716
	5 690	138		82.200	75.716
U-NII 3	5 775	155		81.970	75.948

Band-crossing channel


Band	Frequency (MHz)	Ch.	Data Rate (Mbps)	26 dB Bandwidth (MHz)
11a	5 720	144	6	15.593
11n_HT20	5 720	144	MCS0	16.056
11n_HT40	5 710	142	MCS0	35.030
11ac_VHT80	5 690	138	MCS1	75.980

- Test plots


26 dB Bandwidth

802.11a (Band 1)


Low Channel
(5 180 MHz)

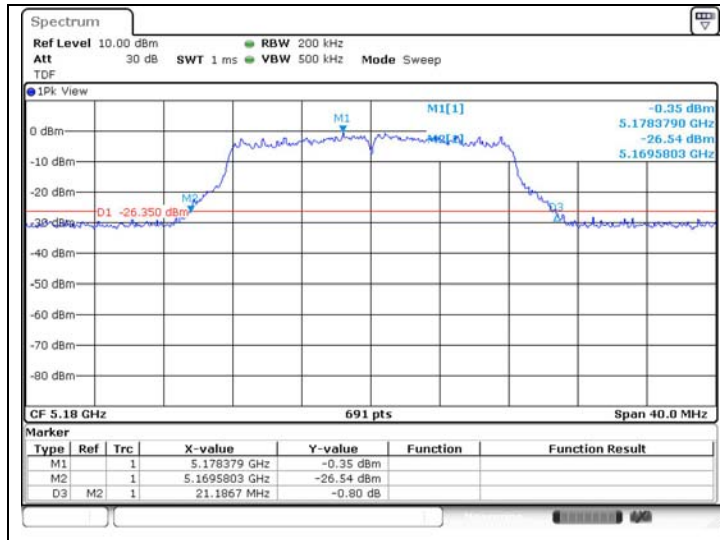

Middle Channel
(5 220 MHz)

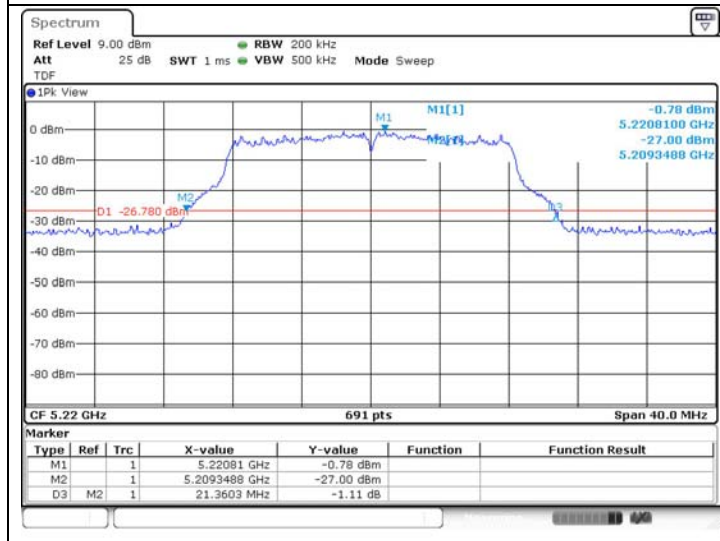


High Channel
(5 240 MHz)

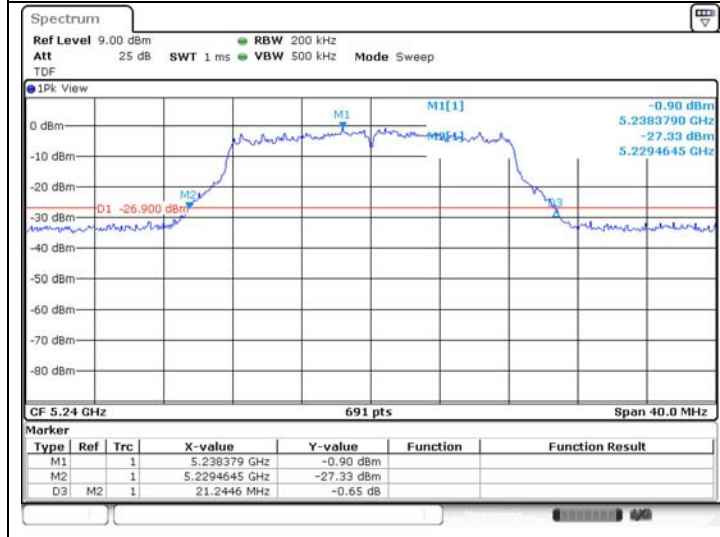


802.11a (Band 2A)


Low Channel
(5 260 MHz)

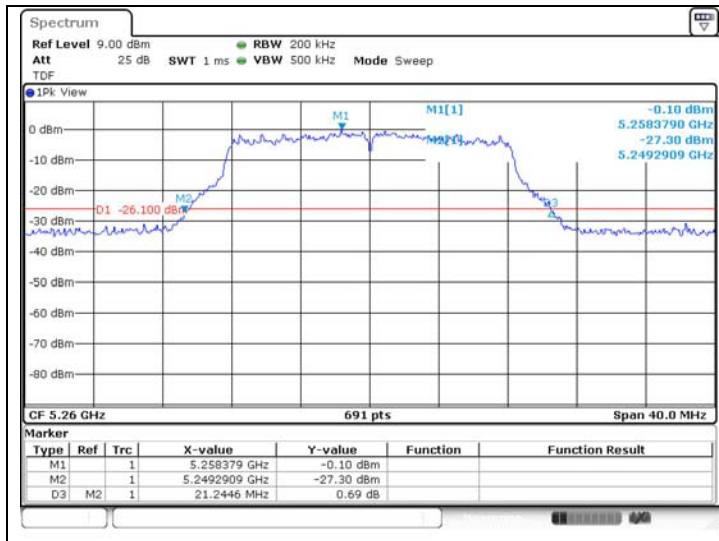

Middle Channel
(5 300 MHz)

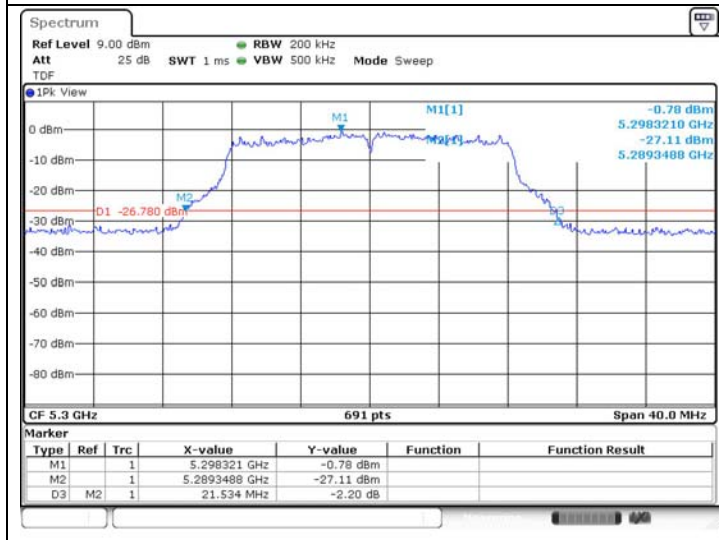


High Channel
(5 320 MHz)

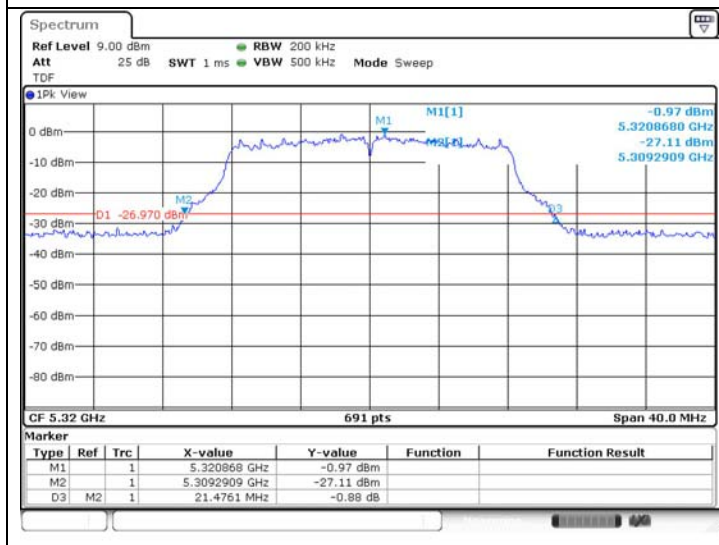


802.11a (Band 2C)


Low Channel
(5 500 MHz)

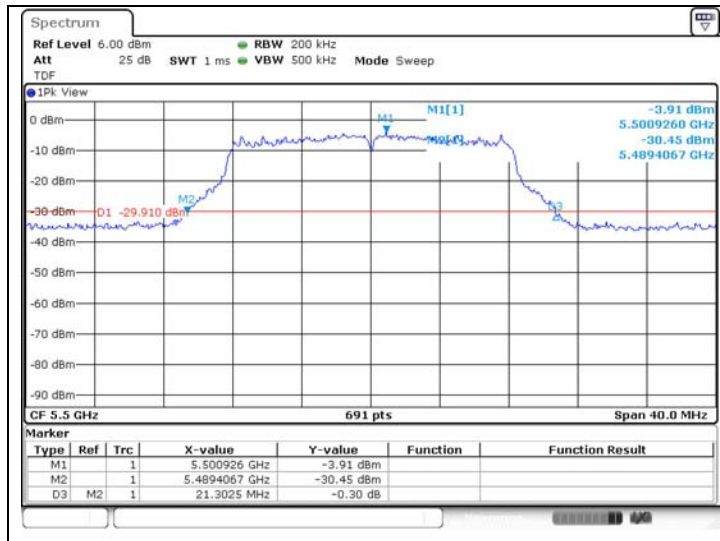

Middle Channel
(5 580 MHz)

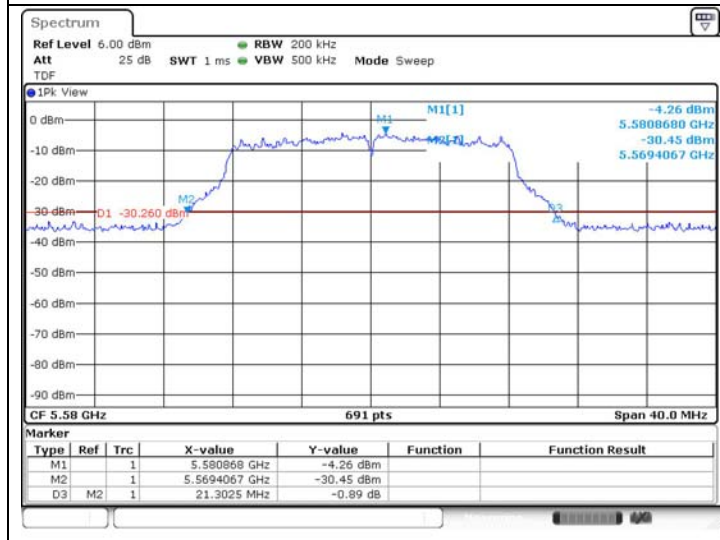


High Channel
(5 720 MHz)

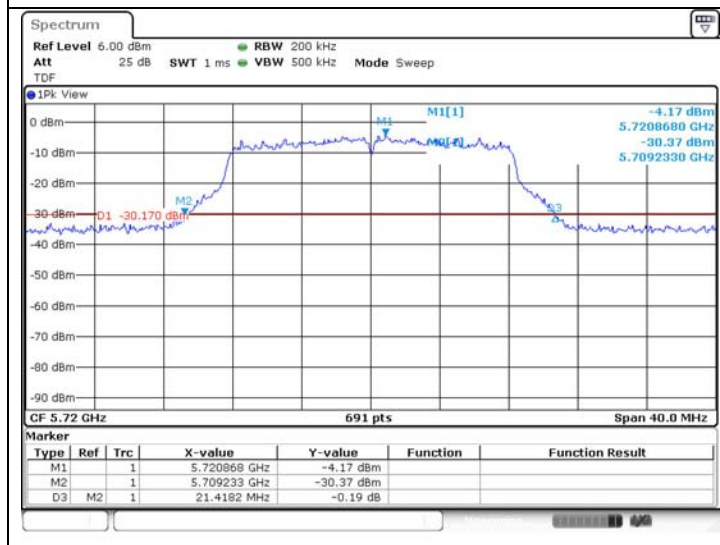


802.11a (Band 3)


Low Channel
(5 745 MHz)

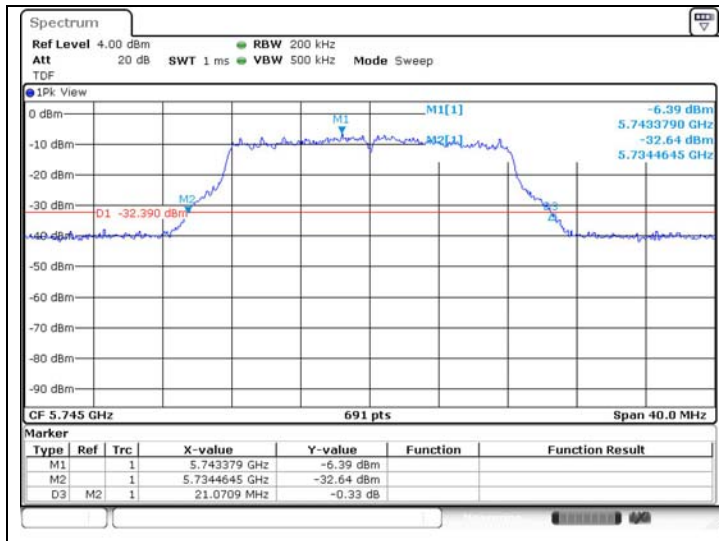

Middle Channel
(5 785 MHz)

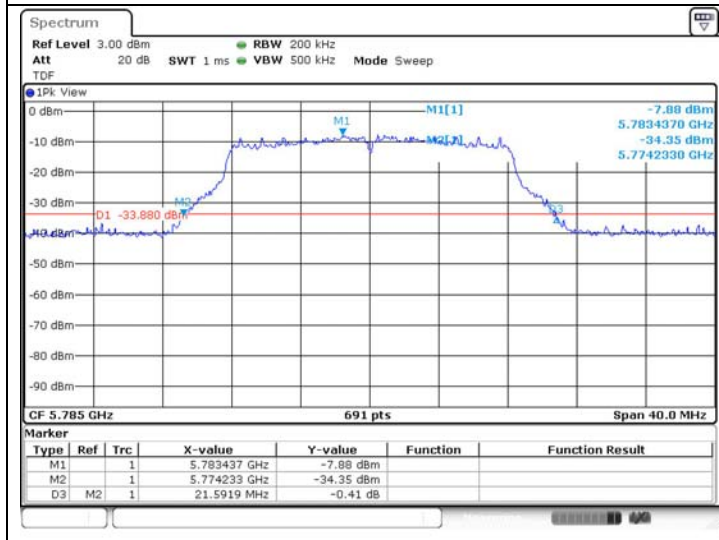


High Channel
(5 825 MHz)

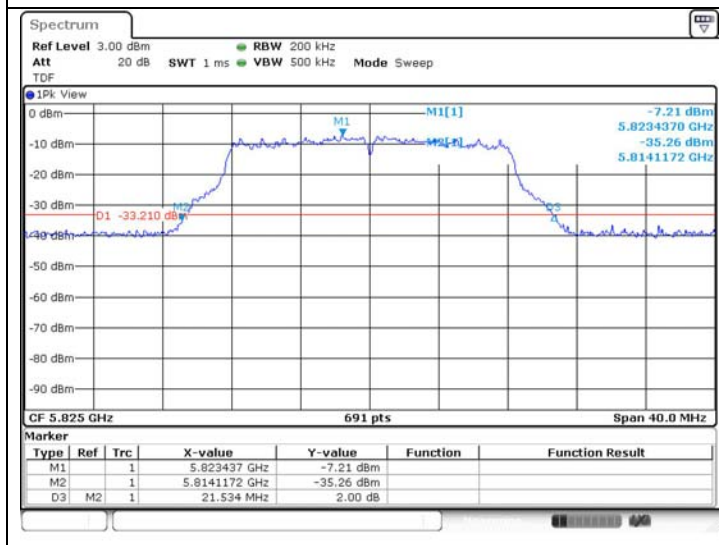


802.11n_HT20 (Band 1)


Low Channel
(5 180 MHz)

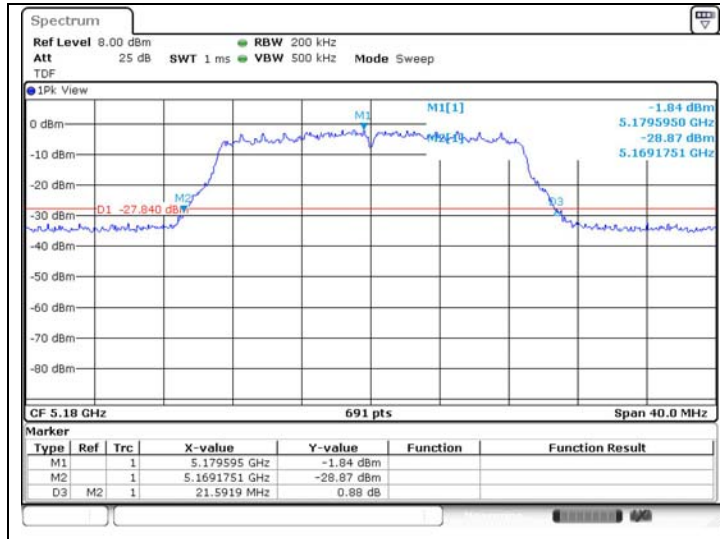

Middle Channel
(5 220 MHz)

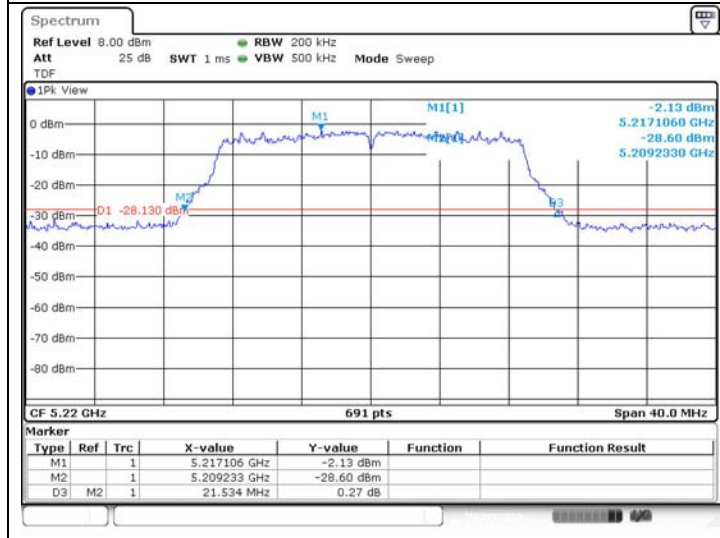


High Channel
(5 240 MHz)

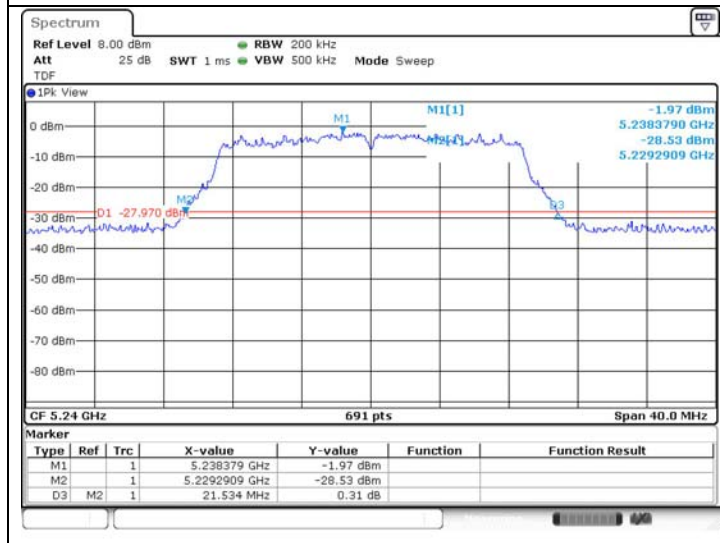


802.11n_HT20 (Band 2A)


Low Channel
 (5 260 MHz)

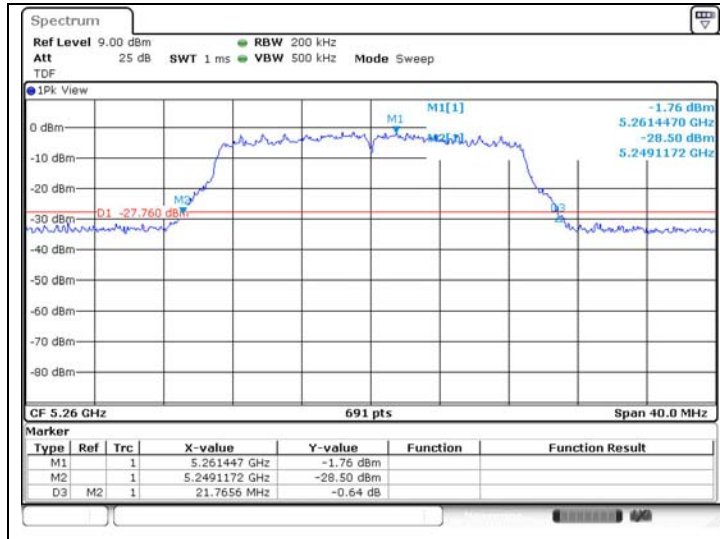

Middle Channel
 (5 300 MHz)

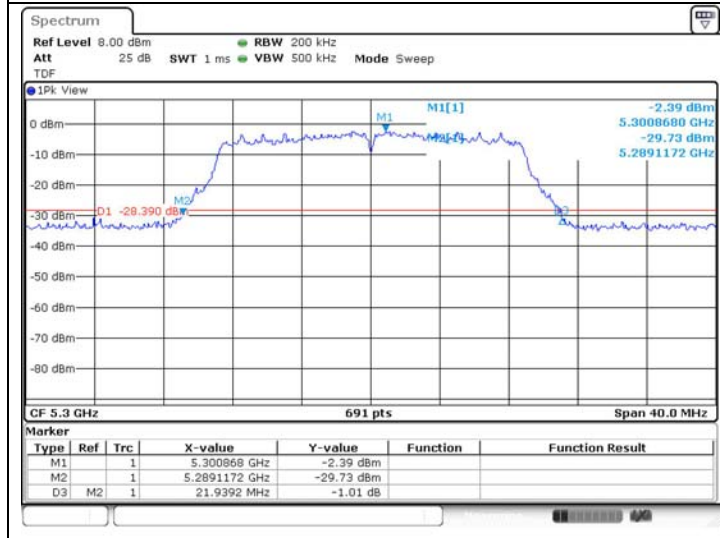


High Channel
 (5 320 MHz)

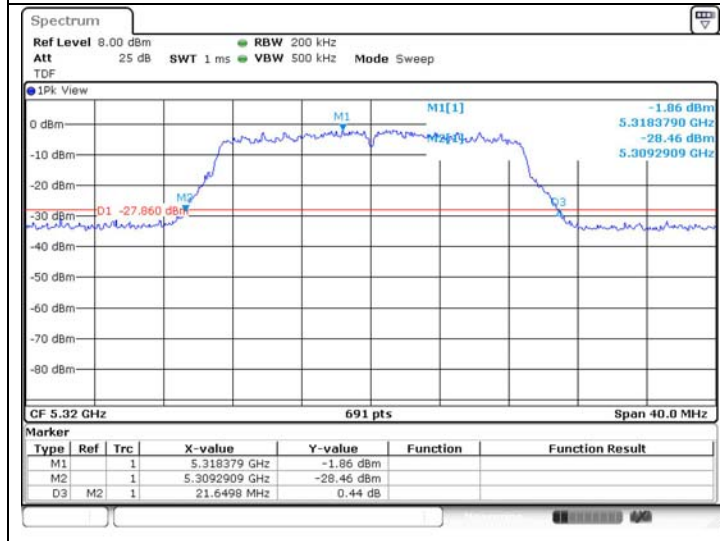


802.11n_HT20 (Band 2C)


Low Channel
(5 500 MHz)

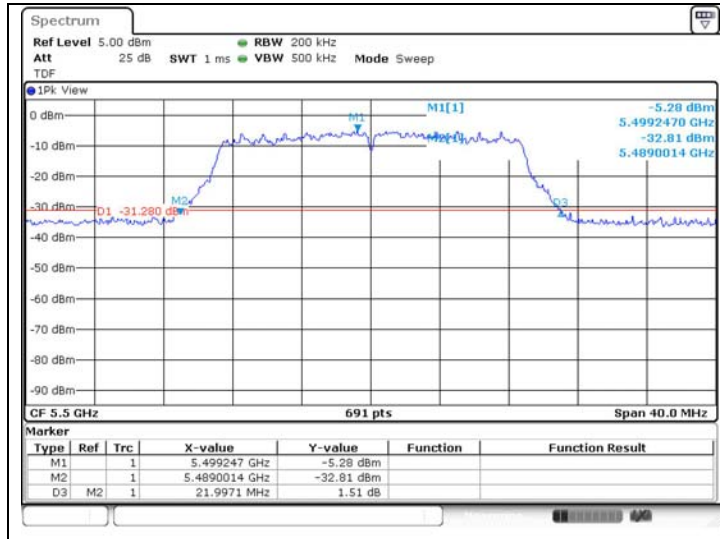

Middle Channel
(5 580 MHz)

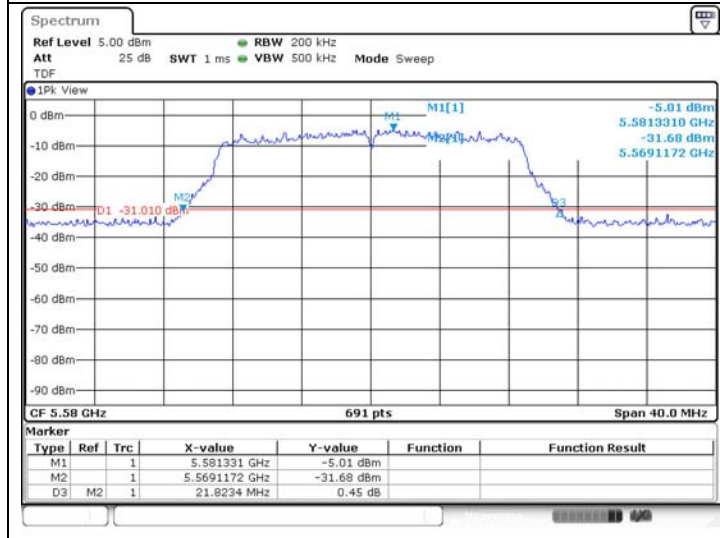


High Channel
(5 720 MHz)

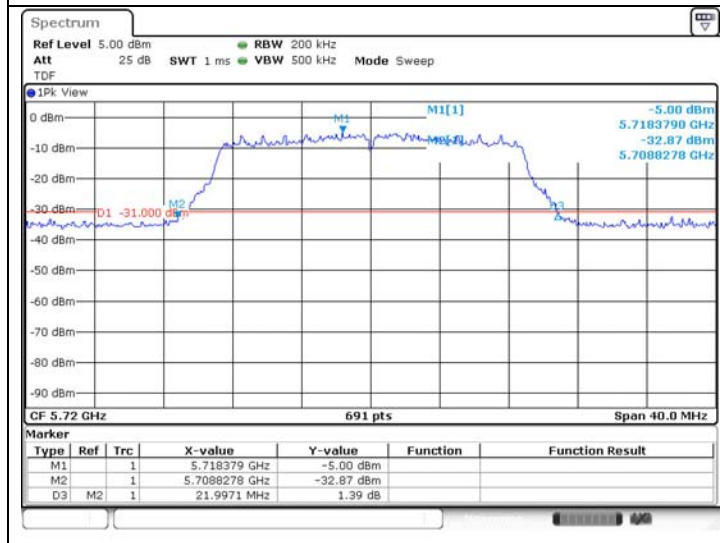


802.11n_HT20 (Band 3)


Low Channel
(5 745 MHz)

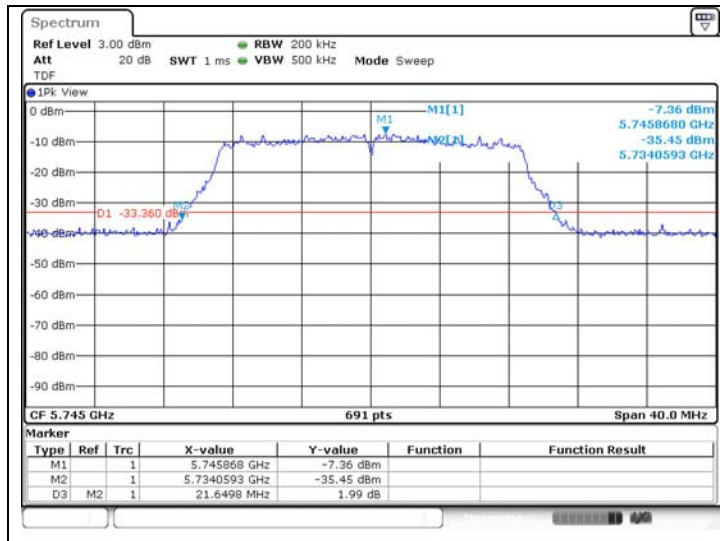

Middle Channel
(5 785 MHz)

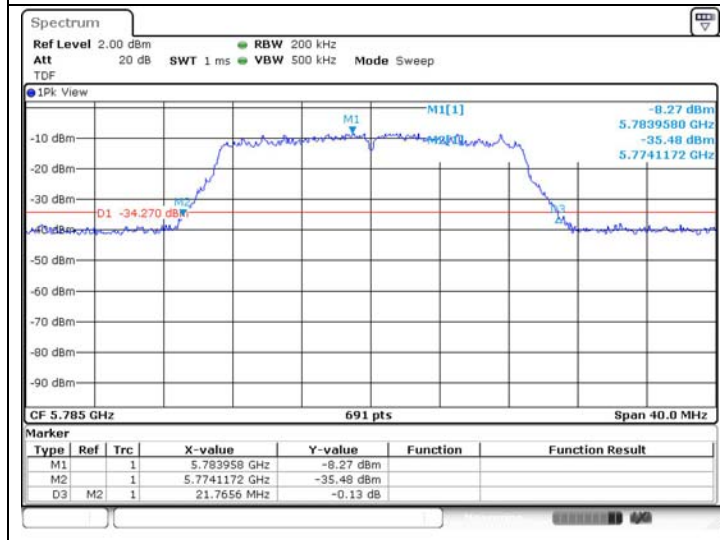


High Channel
(5 825 MHz)

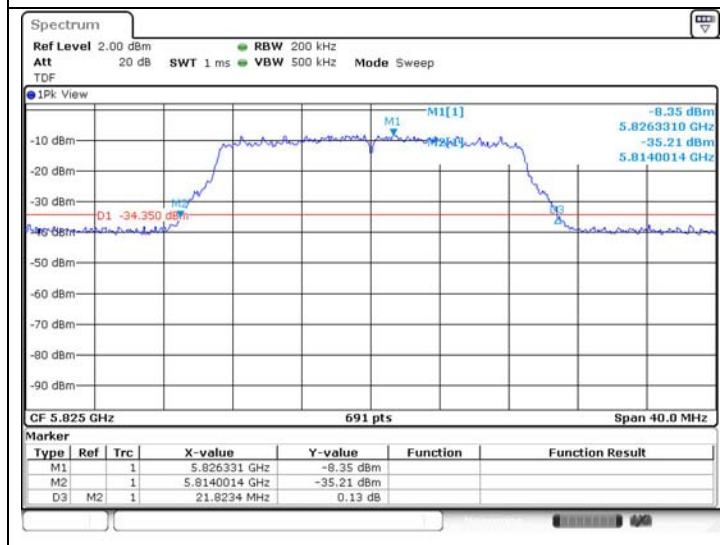


802.11n_HT40 (Band 1)

Low Channel
 (5 190 MHz)

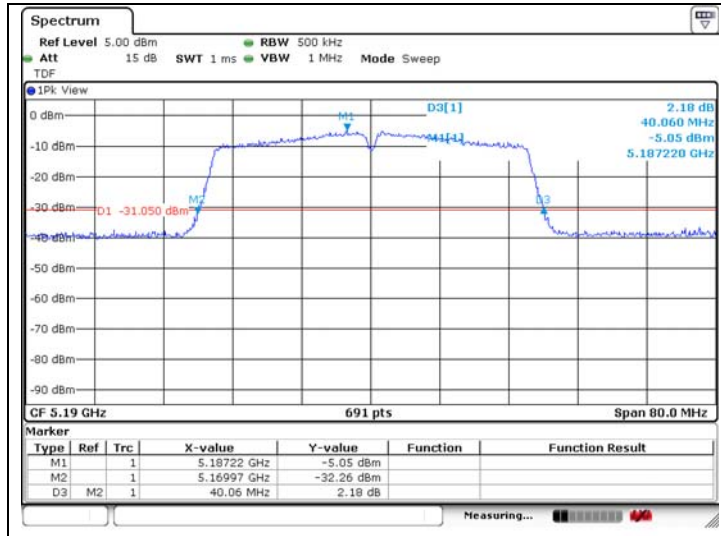


High Channel
 (5 230 MHz)

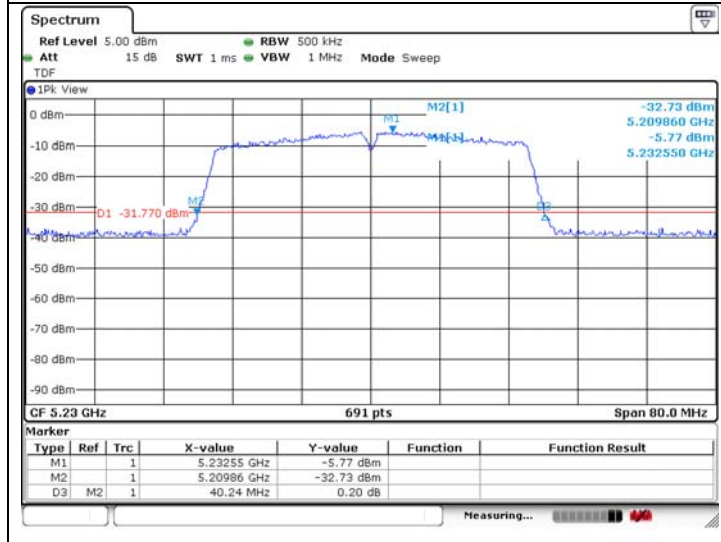


802.11n_HT40 (Band 2A)

Low Channel
 (5 270 MHz)

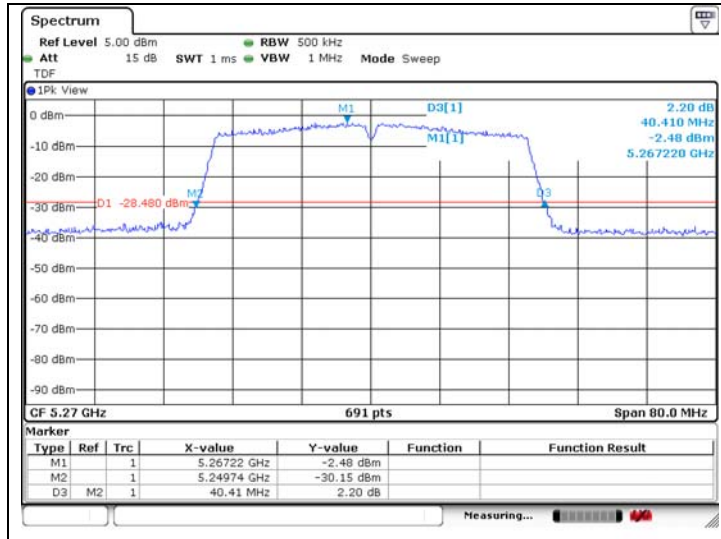


High Channel
 (5 310 MHz)

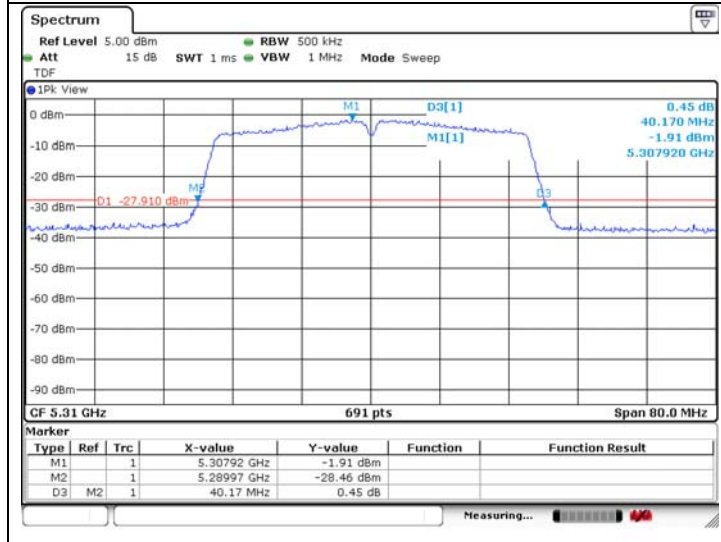


802.11n_HT40 (Band 2C)


Low Channel
 (5 510 MHz)

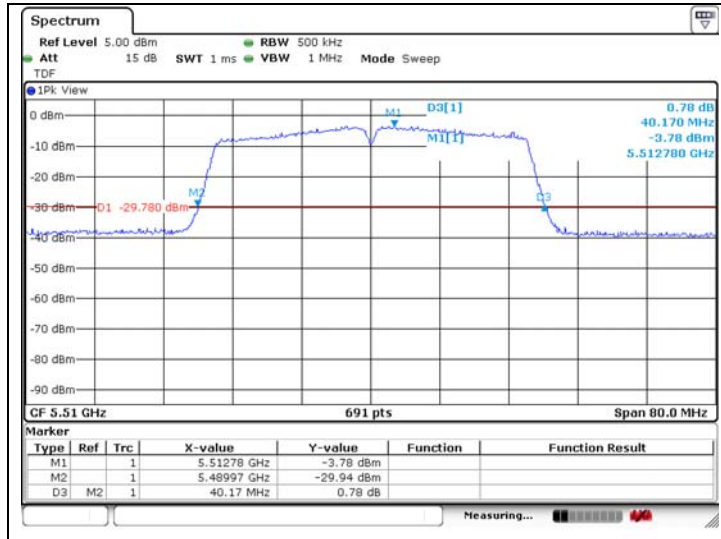

Middle Channel
 (5 550 MHz)

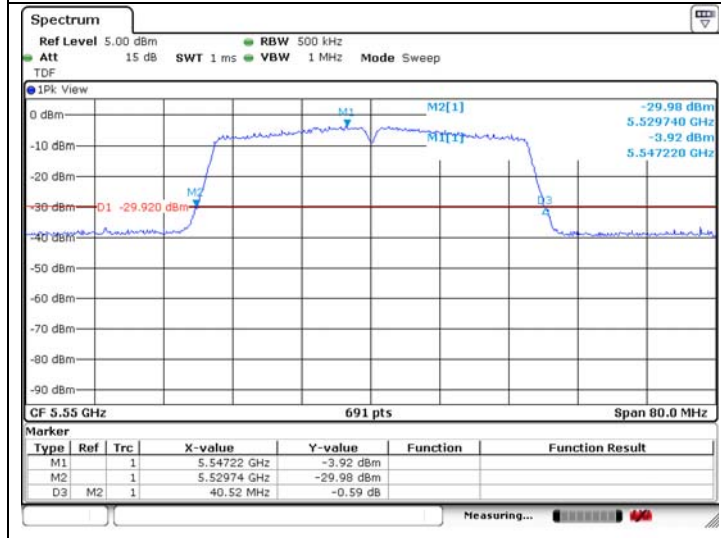


High Channel
 (5 710 MHz)

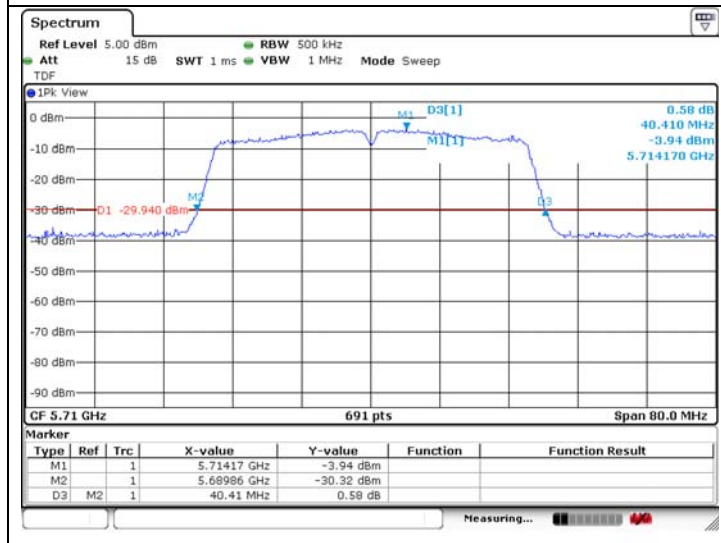


802.11n_HT40 (Band 3)

Low Channel
 (5 755 MHz)

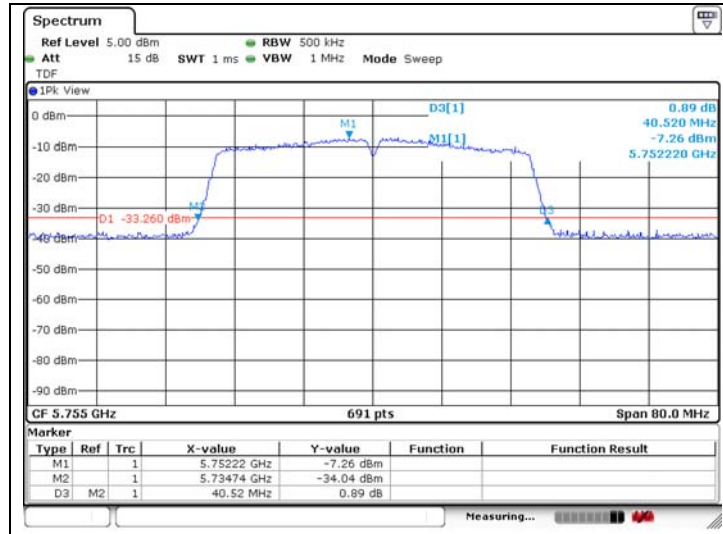


High Channel
 (5 795 MHz)

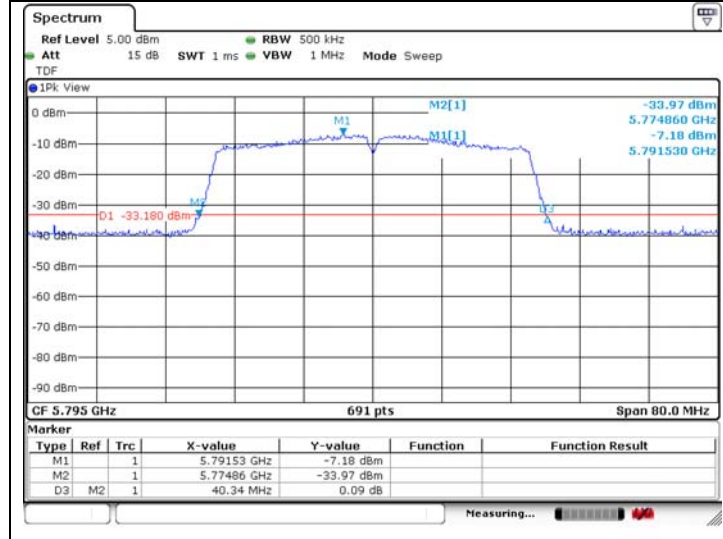


802.11ac_VHT80 (Band 1)

Middle Channel
 (5 210 MHz)

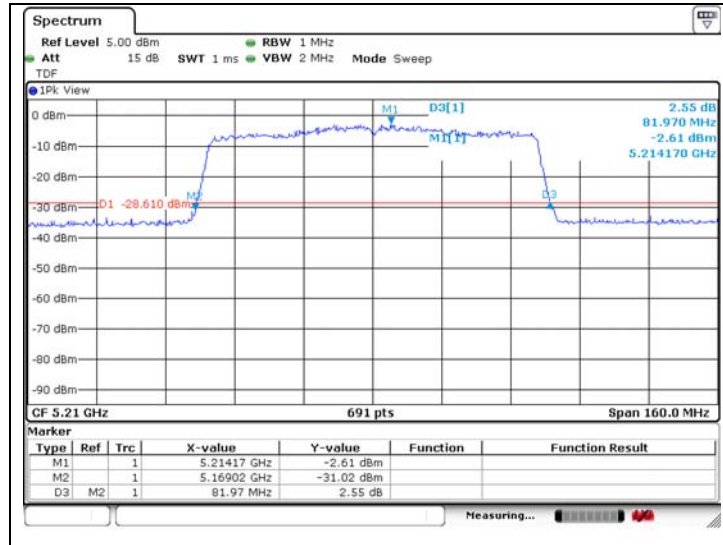


802.11ac_VHT80 (Band 2A)

Middle Channel
 (5 290 MHz)

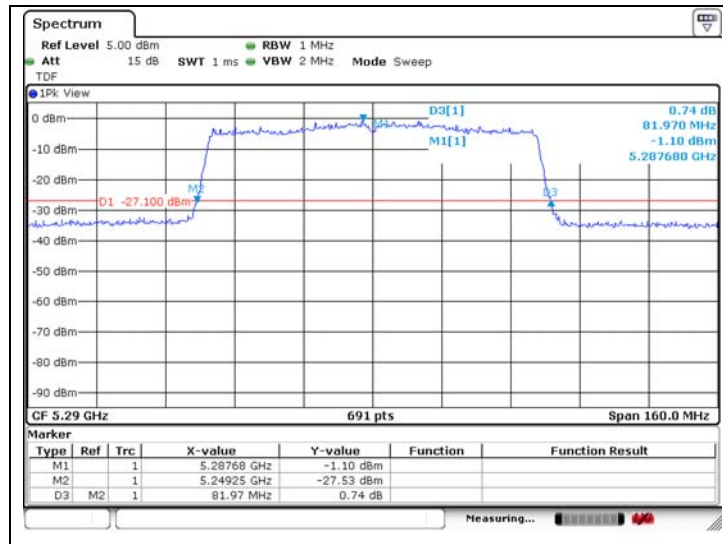


802.11ac_VHT80 (Band 2C)

Low Channel
(5 530 MHz)

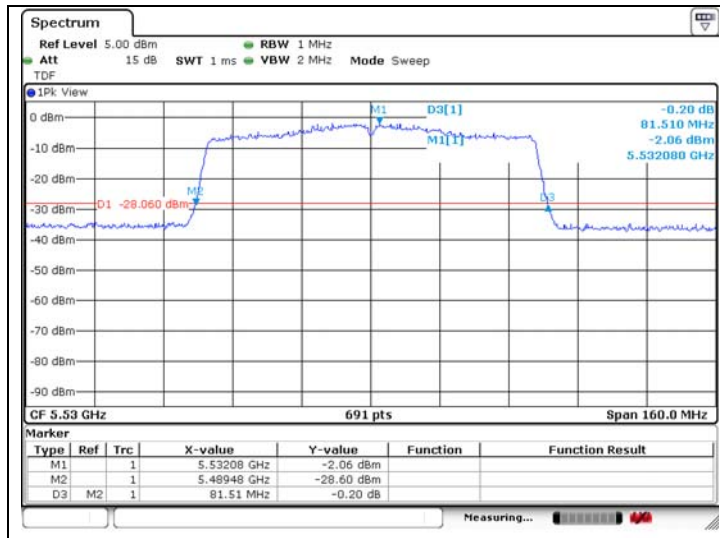


High Channel
(5 690 MHz)

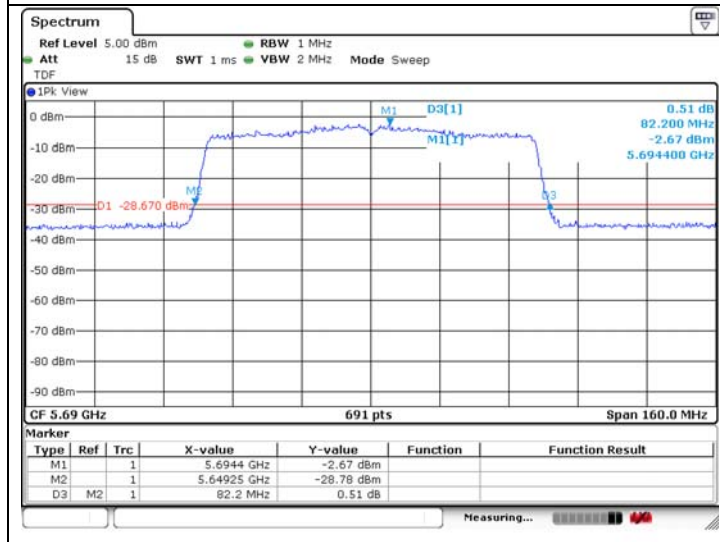

802.11ac_VHT80 (Band 3)


Middle Channel
(5 775 MHz)

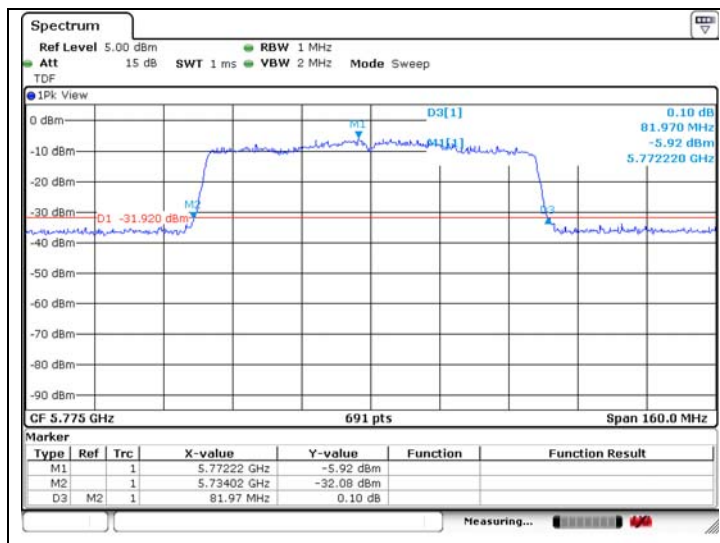


99 % Bandwidth

802.11a (Band 1)


Low Channel
 (5 180 MHz)

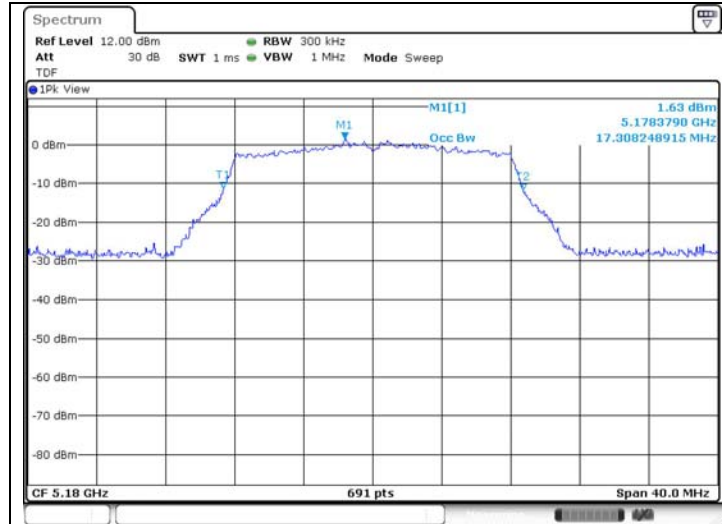

Middle Channel
 (5 220 MHz)

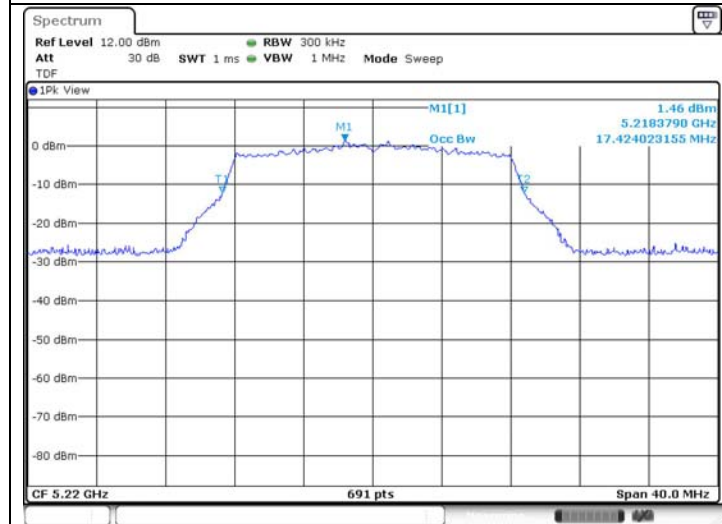


High Channel
 (5 240 MHz)

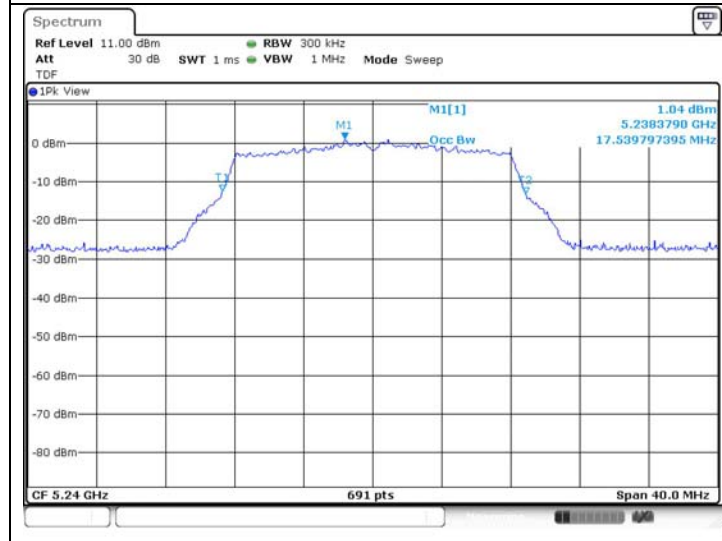


802.11a (Band 2A)


Low Channel
 (5 260 MHz)

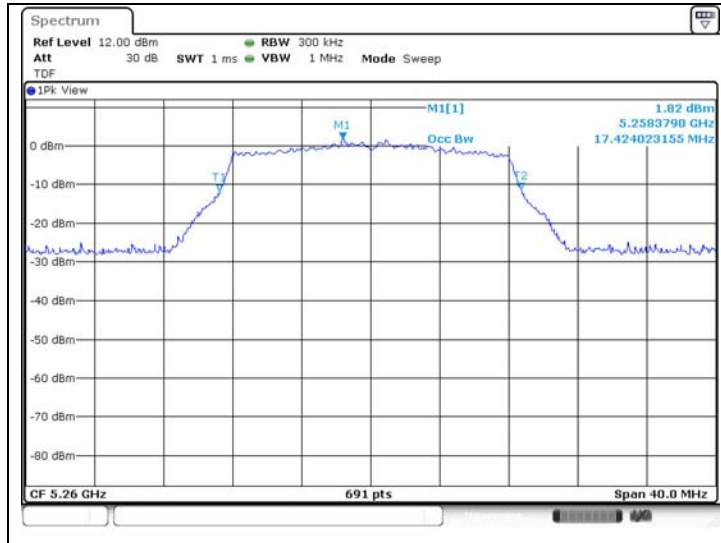

Middle Channel
 (5 300 MHz)

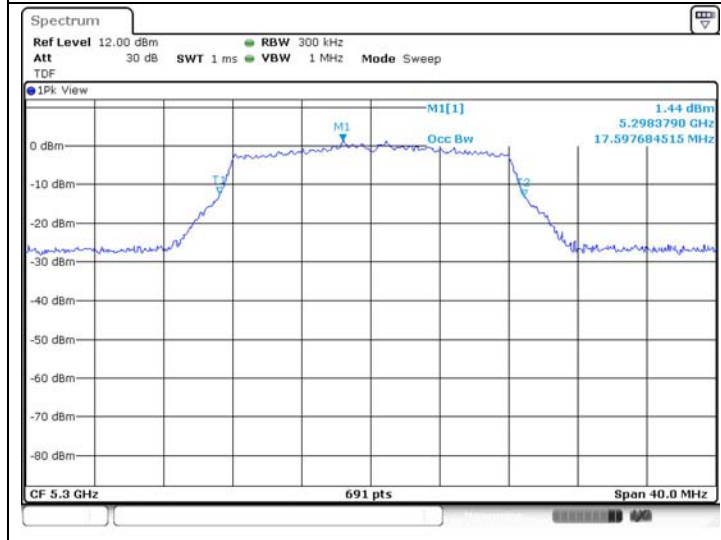


High Channel
 (5 320 MHz)

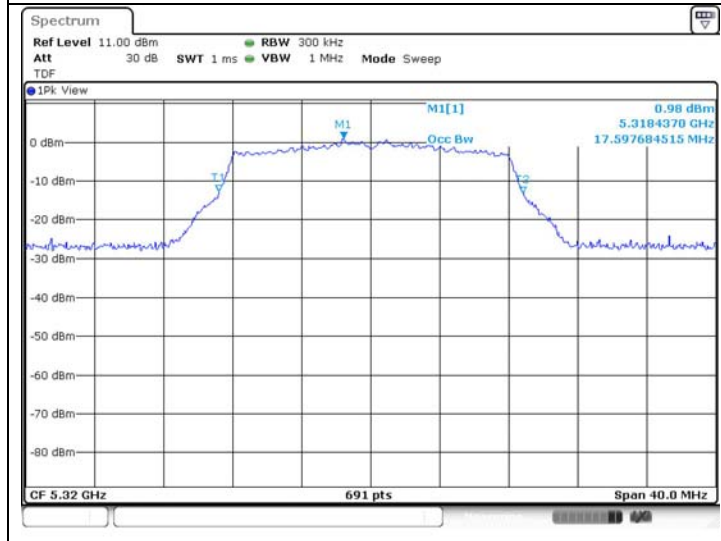


802.11a (Band 2C)


Low Channel
(5 500 MHz)

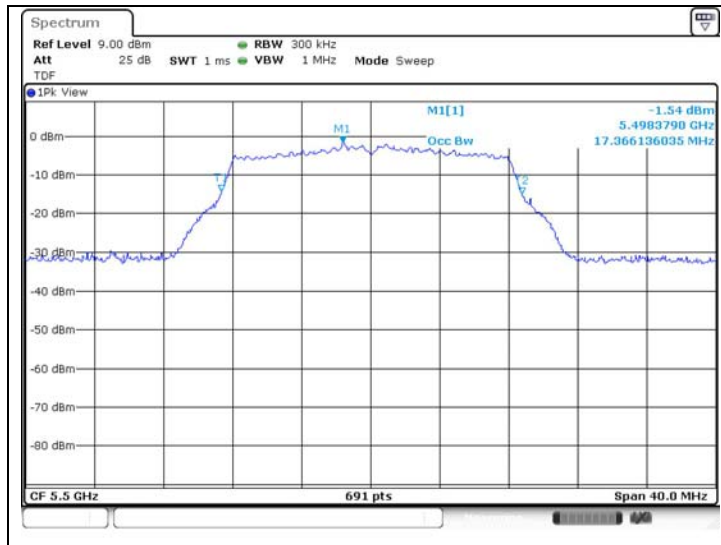

Middle Channel
(5 580 MHz)

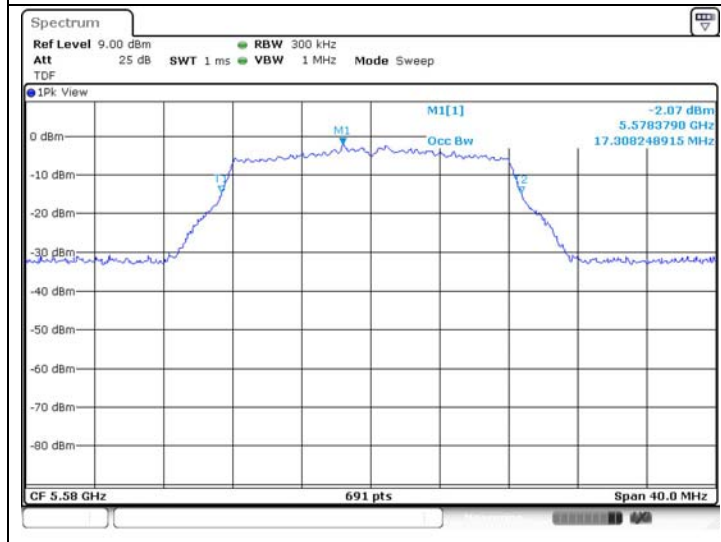


High Channel
(5 720 MHz)

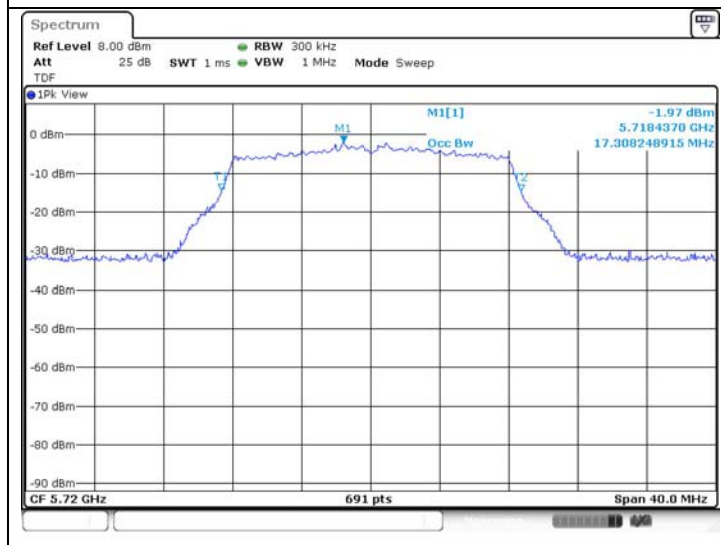


802.11a (Band 3)


Low Channel
(5 745 MHz)

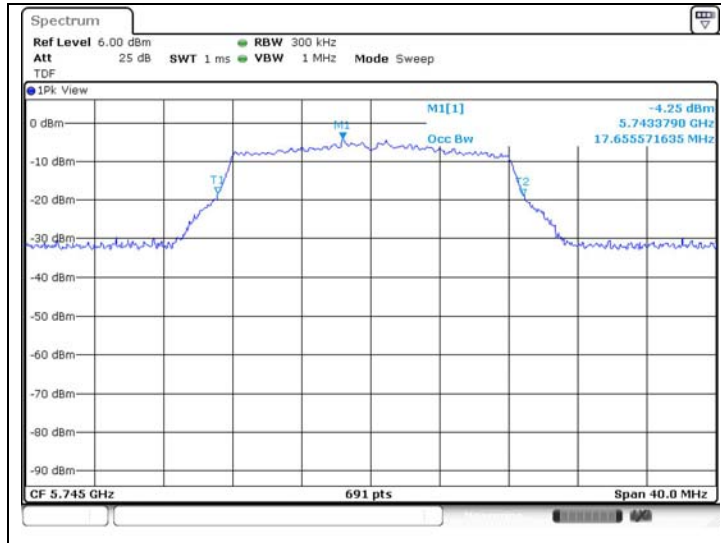

Middle Channel
(5 785 MHz)

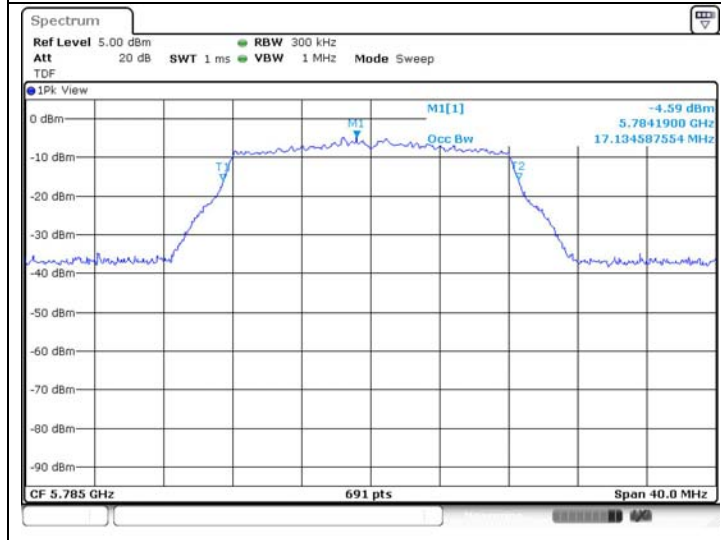


High Channel
(5 825 MHz)

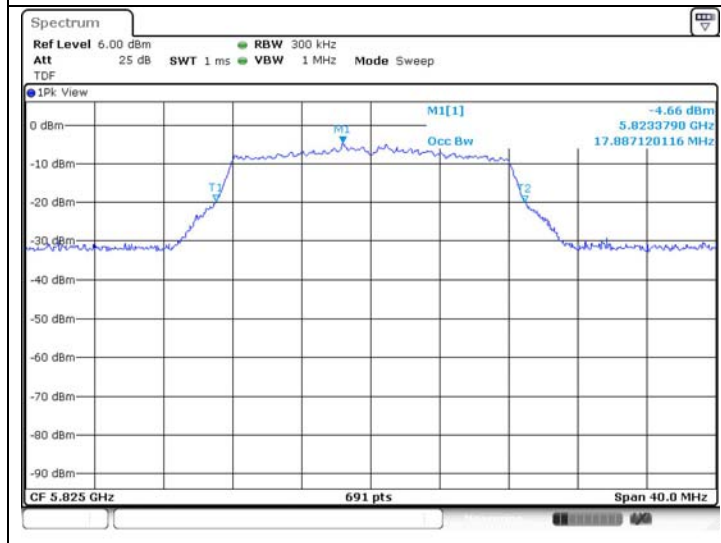


802.11n_HT20 (Band 1)


Low Channel
 (5 180 MHz)

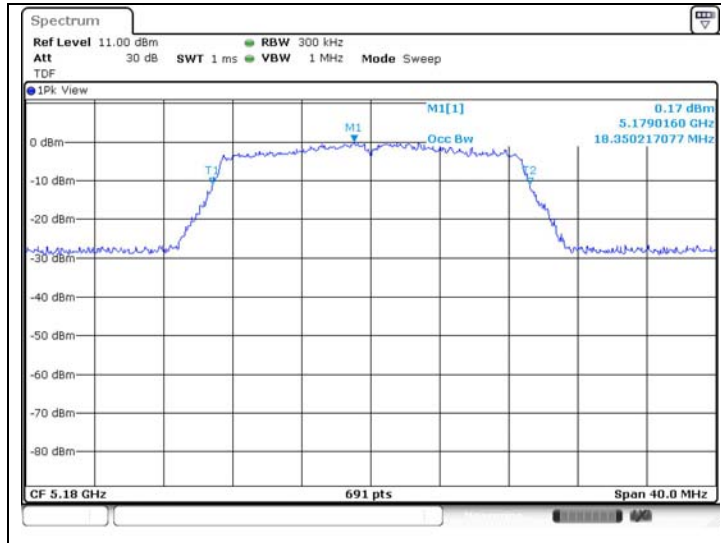




Middle Channel
 (5 220 MHz)

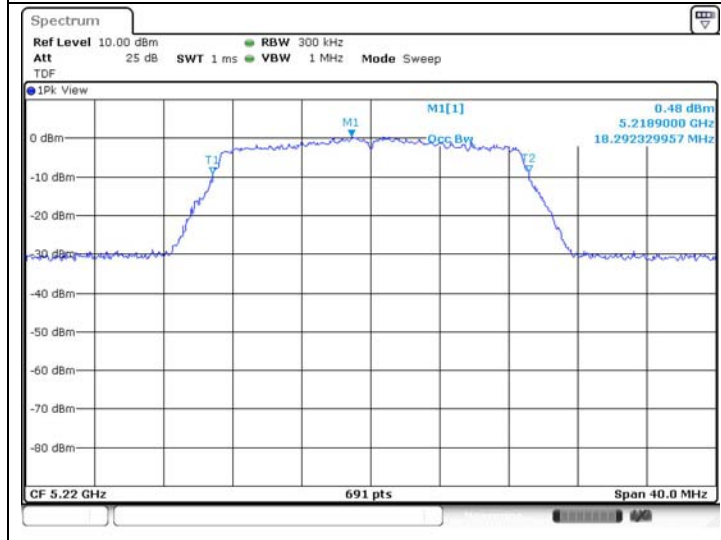

High Channel
 (5 240 MHz)

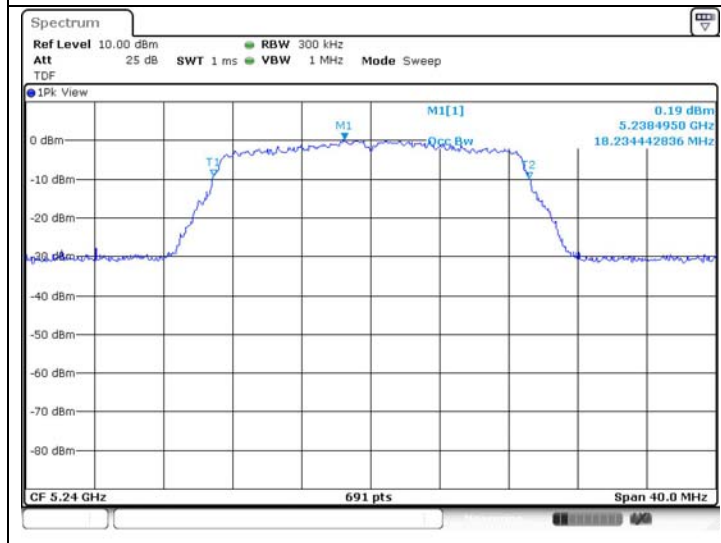


802.11n_HT20 (Band 2A)

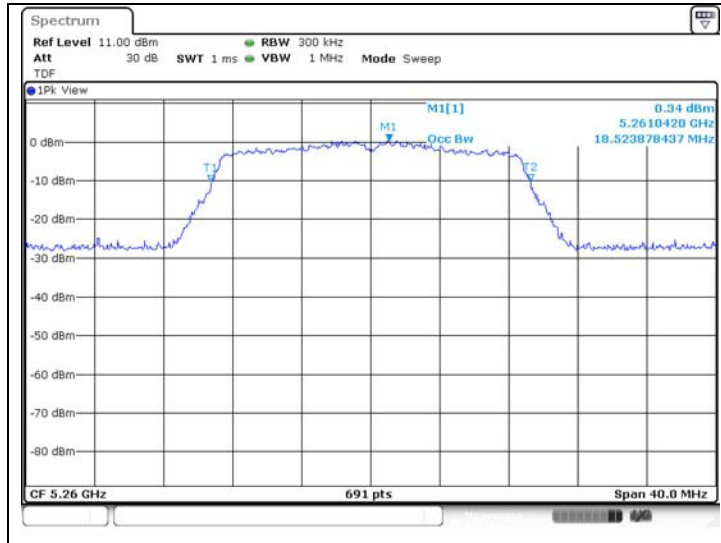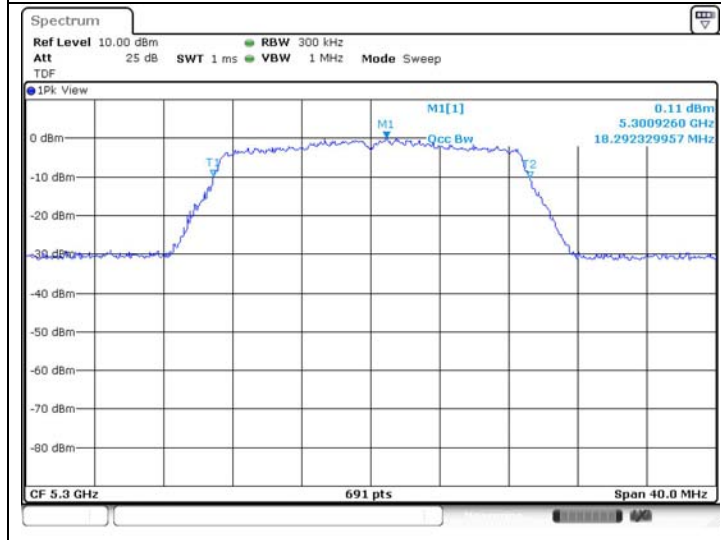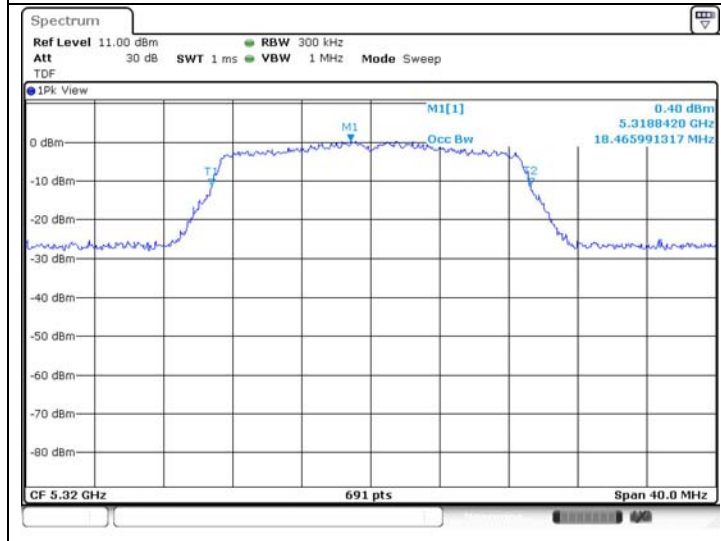
Low Channel
(5 260 MHz)

Middle Channel
(5 300 MHz)

High Channel
(5 320 MHz)

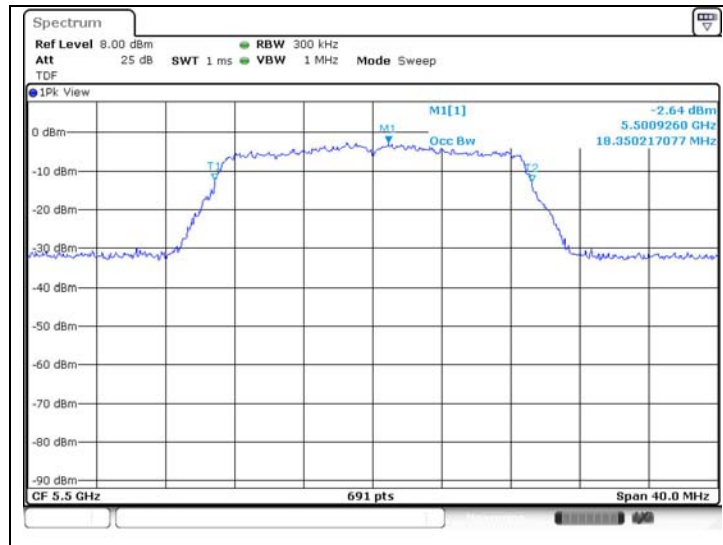
802.11n_HT20 (Band 2C)


Low Channel
(5 500 MHz)

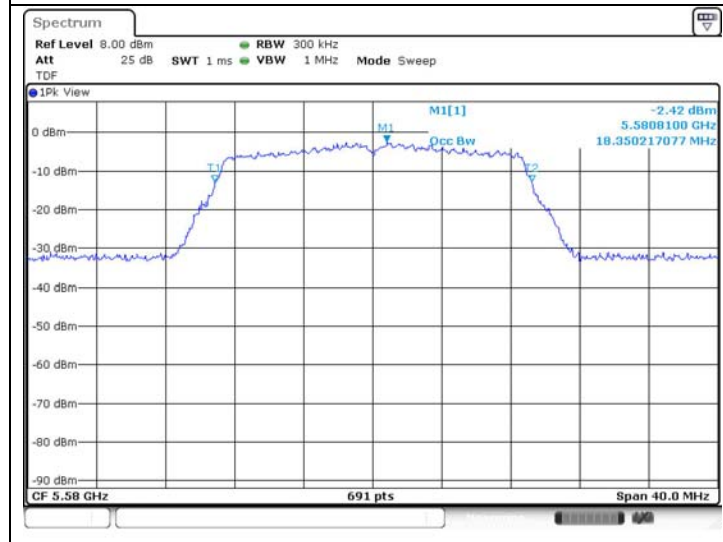

Middle Channel
(5 580 MHz)




High Channel
(5 720 MHz)

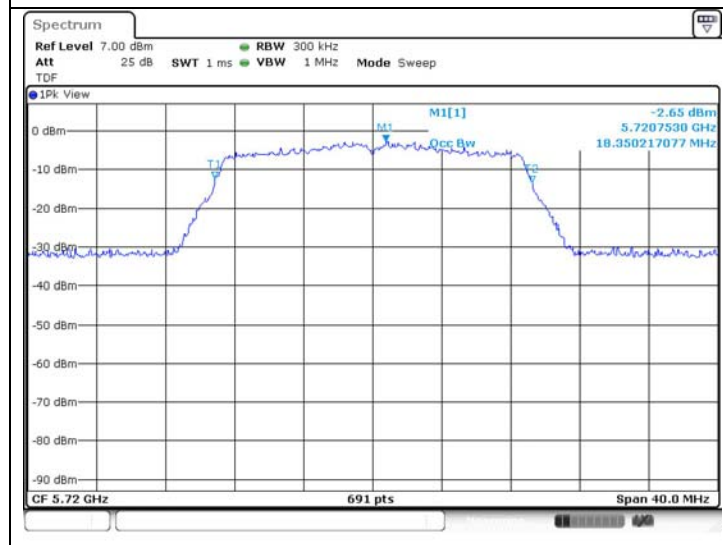


802.11n_HT20 (Band 3)


Low Channel
 (5 745 MHz)

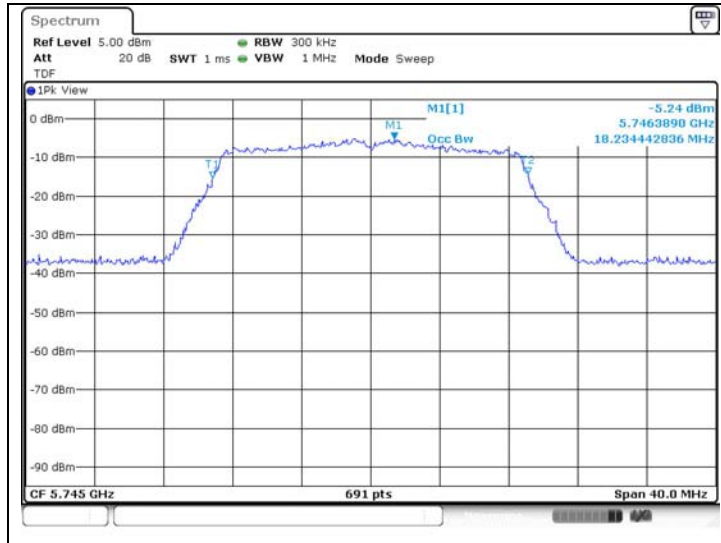

Middle Channel
 (5 785 MHz)

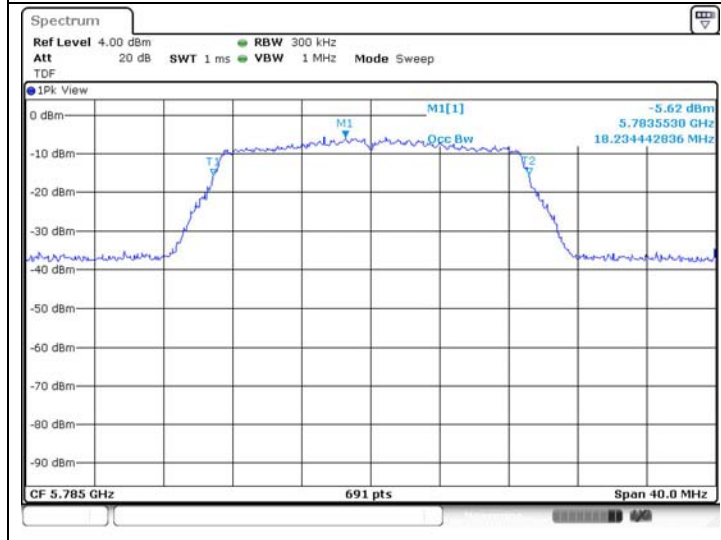


High Channel
 (5 825 MHz)

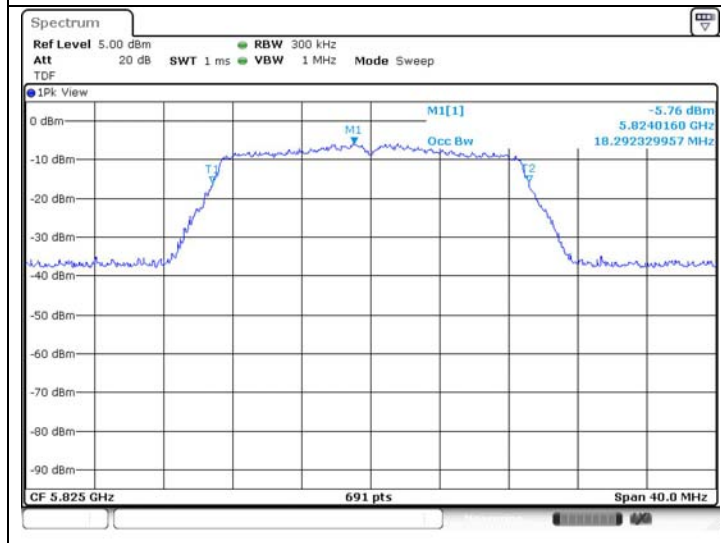


802.11n_HT40 (Band 1)

Low Channel
 (5 190 MHz)

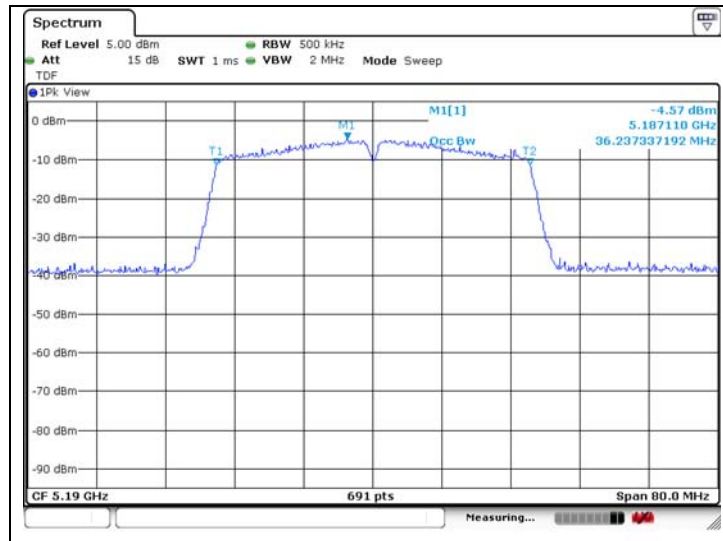


High Channel
 (5 230 MHz)

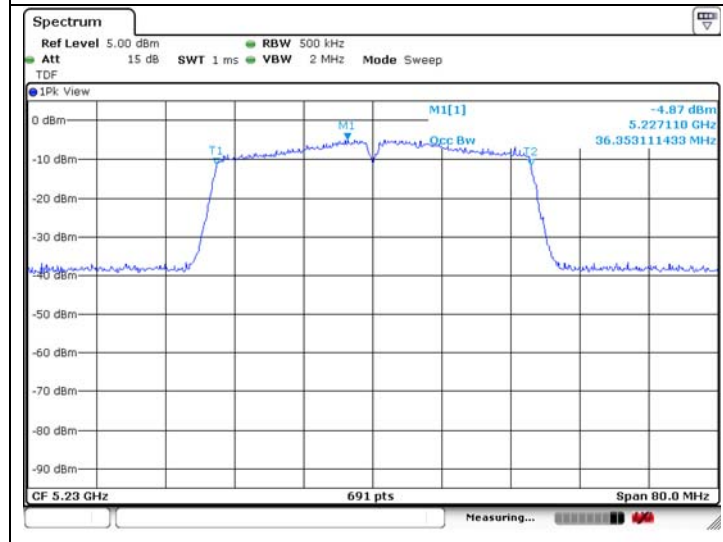


802.11n_HT40 (Band 2A)

Low Channel
 (5 270 MHz)

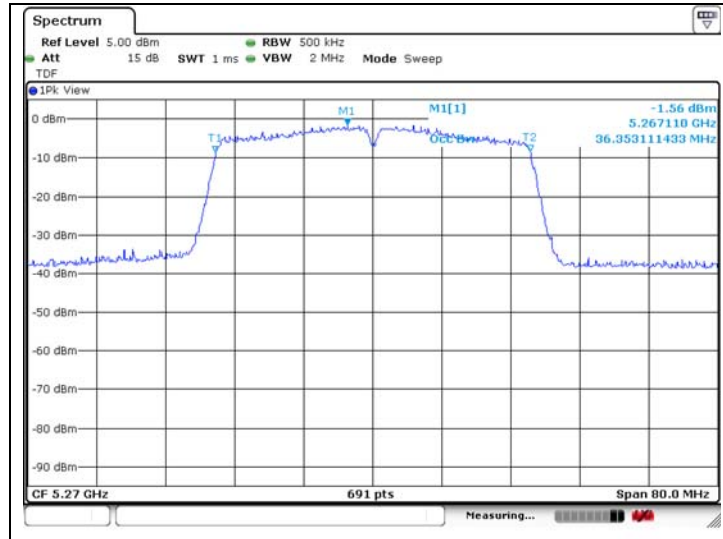


High Channel
 (5 310 MHz)

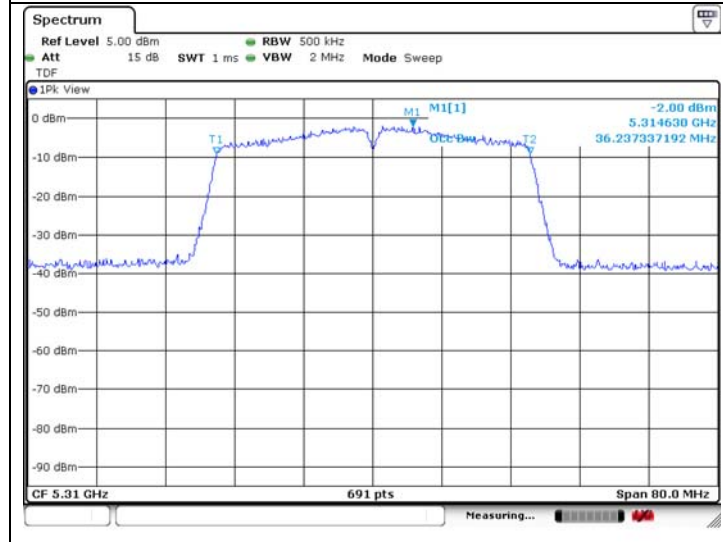


802.11n_HT40 (Band 2C)


Low Channel
 (5 510 MHz)

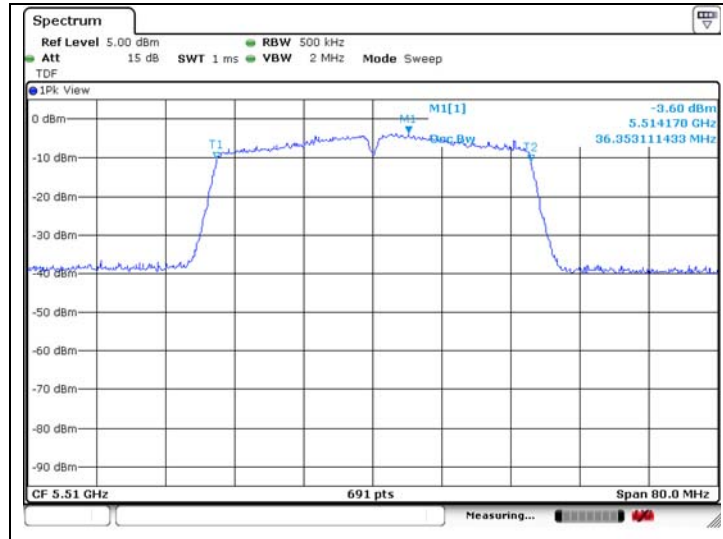



Middle Channel
 (5 550 MHz)

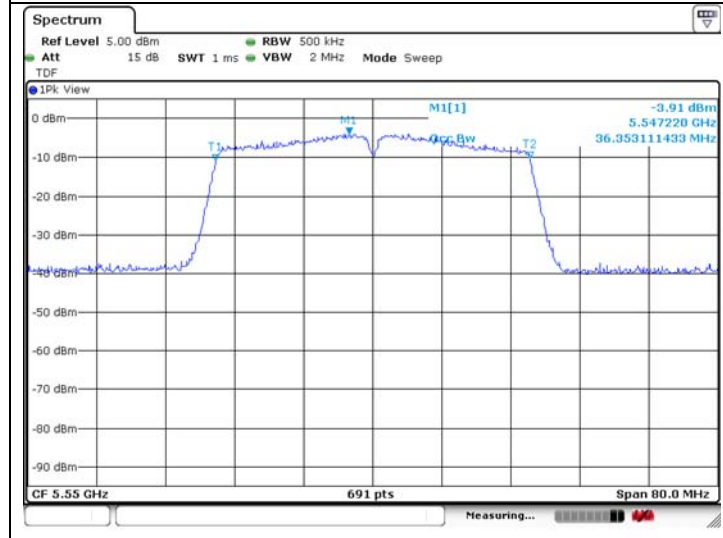

High Channel
 (5 710 MHz)

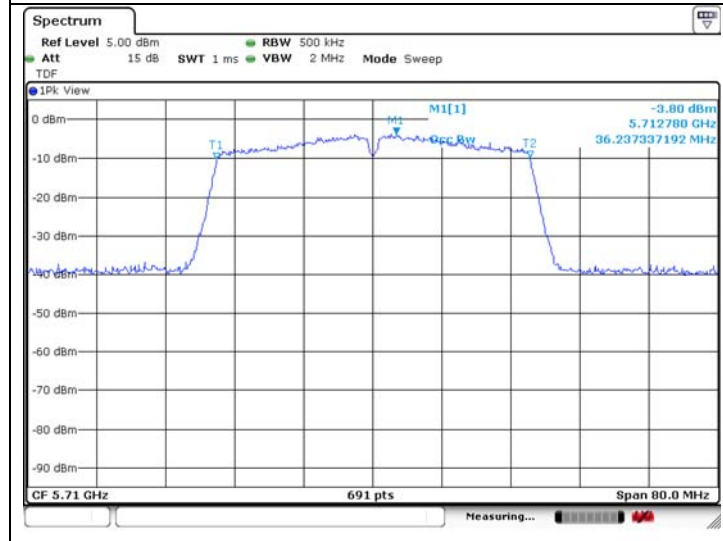


802.11n_HT40 (Band 3)

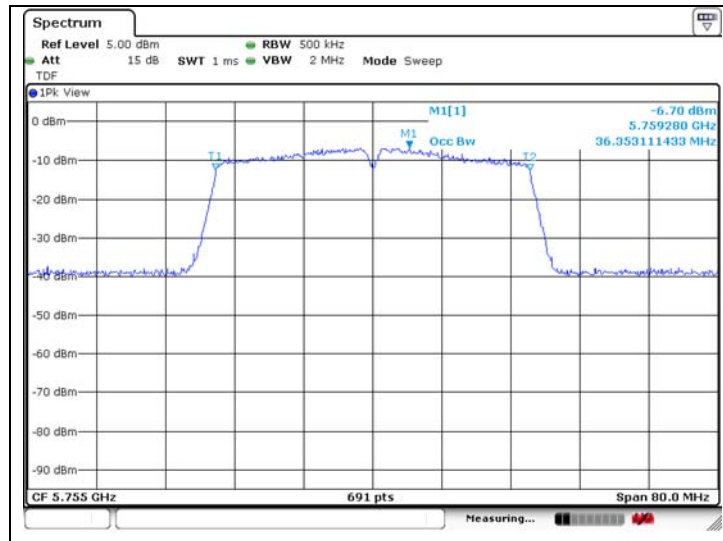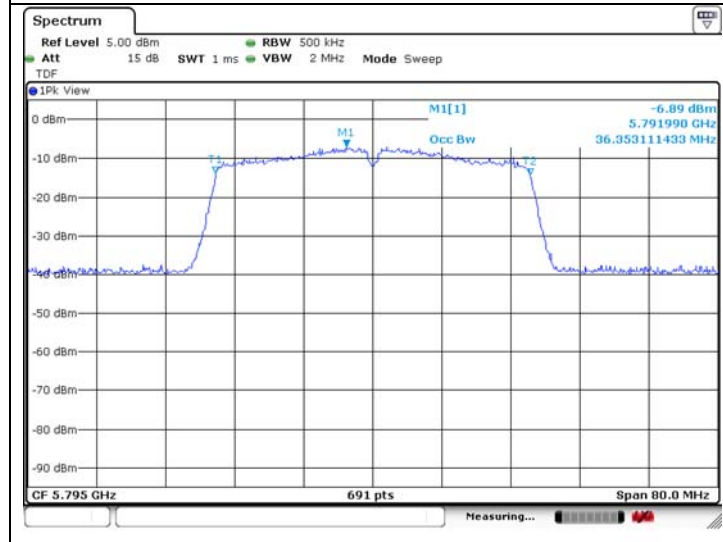Low Channel
(5 755 MHz)

High Channel
(5 795 MHz)


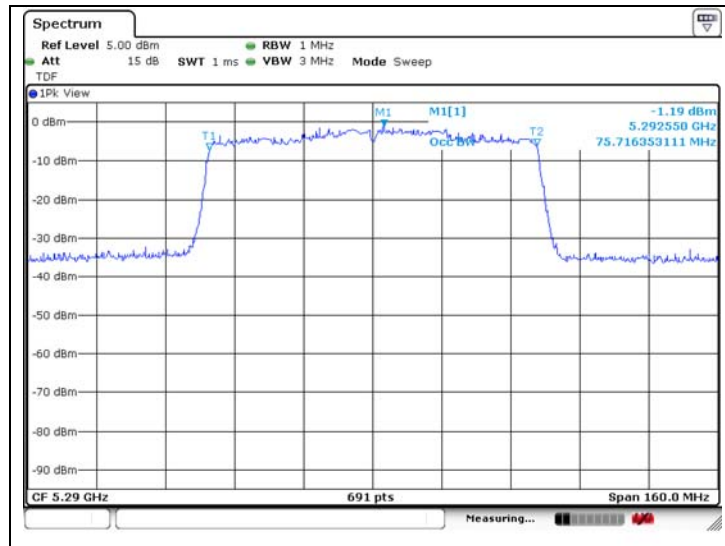
802.11ac_VHT80 (Band 1)

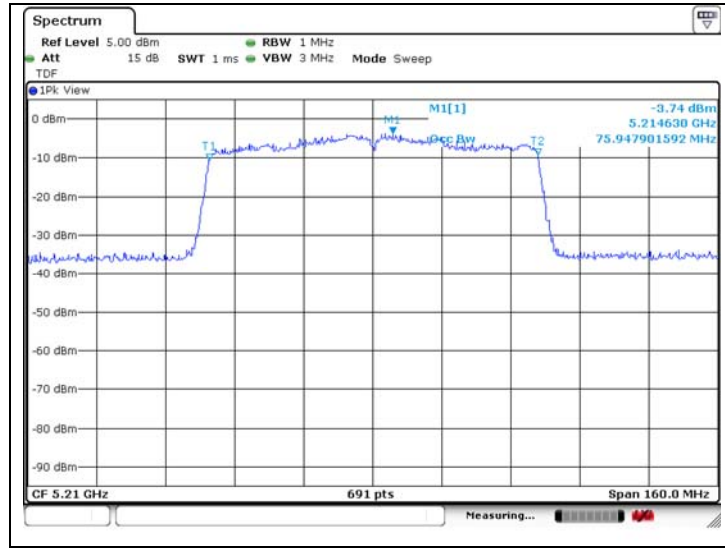Middle Channel
 (5 210 MHz)




802.11ac_VHT80 (Band 2A)

Middle Channel
 (5 290 MHz)




802.11ac_VHT80 (Band 2C)

Low Channel
 (5 530 MHz)

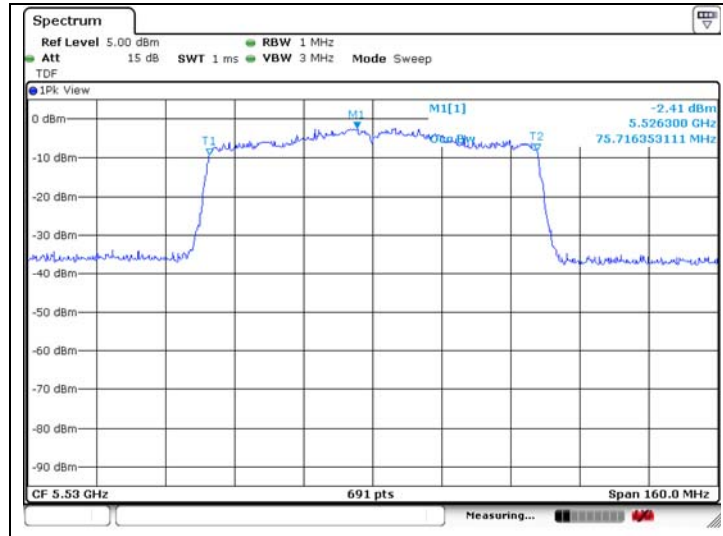


High Channel
 (5 690 MHz)

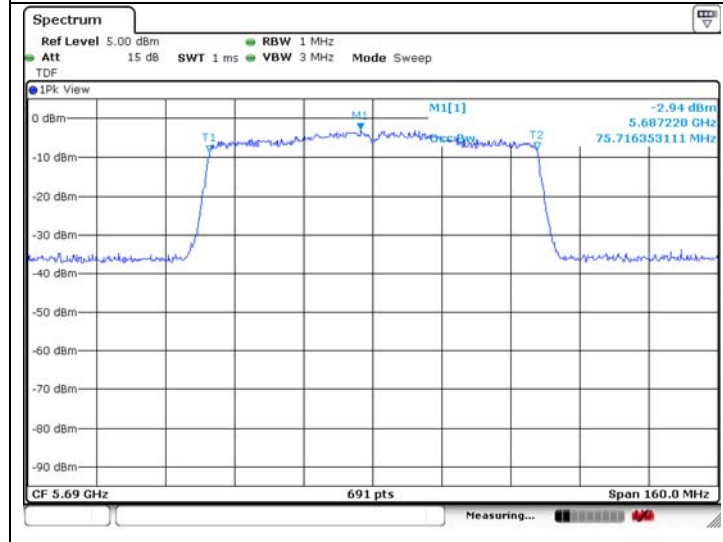


802.11ac_VHT80 (Band 3)

Middle Channel
 (5 775 MHz)

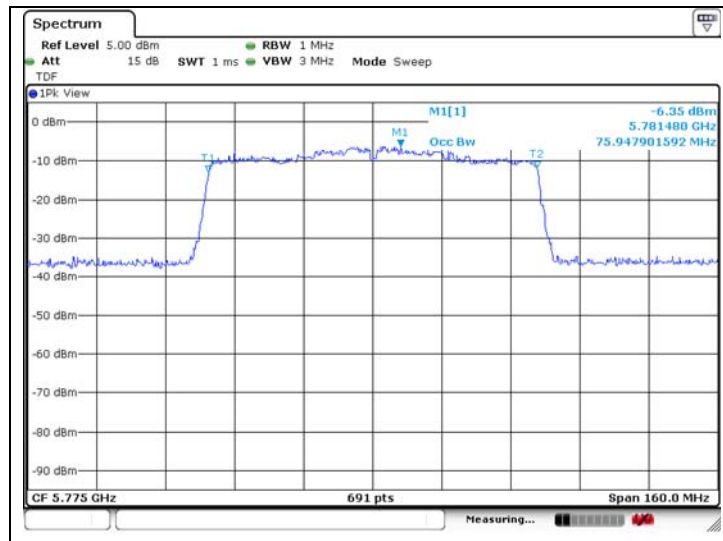


Band-crossing channels


802.11a (5 720 MHz)

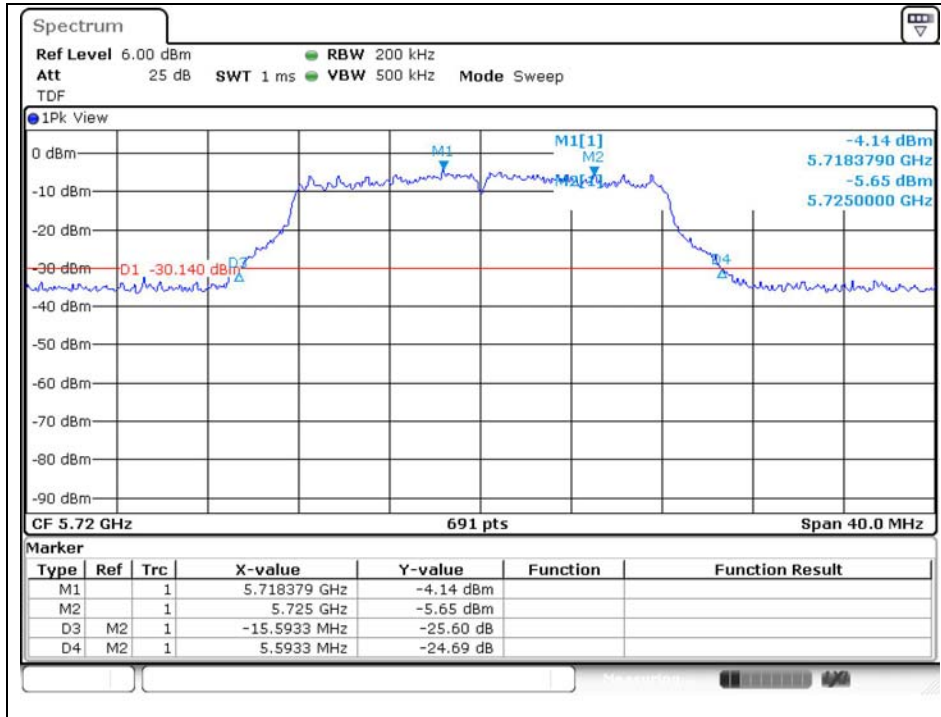

802.11n_HT20 (5 720 MHz)

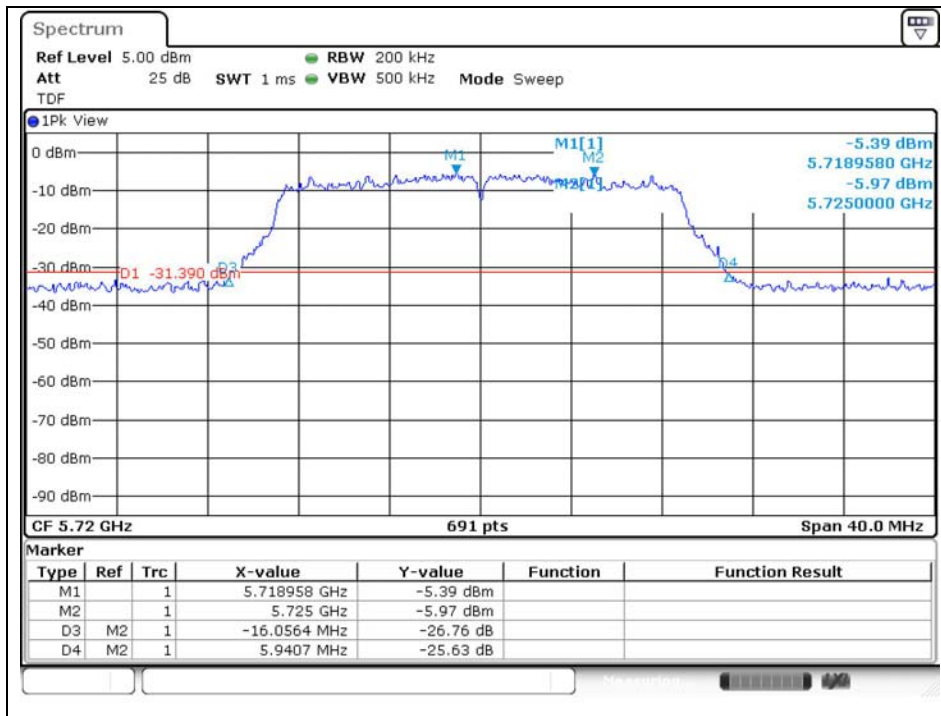

802.11n_HT40 (5 710 MHz)

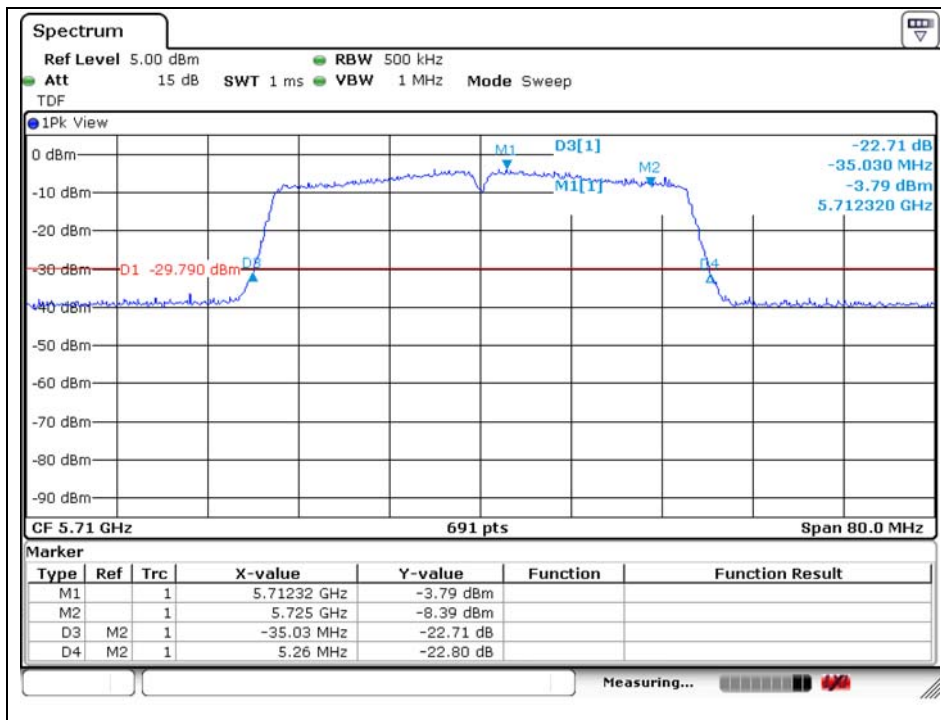

802.11ac_VHT80 (5 690 MHz)

