

TEST REPORT

OF

FCC Part 15 Subpart C §15.209 / IC RSS-210 Issue 8, RSS-Gen Issue 3
FCC ID/IC Certification: TQ8-SMK-4E06 / 5074A-SMK4E06

Equipment Under Test : SMART KEY ECU
Model Name : SMK-4E06
Applicant : Hyundai MOBIS Co., Ltd.
Manufacturer : Hyundai MOBIS Co., Ltd.
Date of Test(s) : 2014.04.21 ~ 2014.05.12
Date of Issue : 2014.05.12

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Alvin Kim

Date:

2014.05.12

Approved By



Feel Jeong

Date:

2014.05.12

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

TABLE OF CONTENTS

	Page
1. General Information -----	3
2. Field Strength of Fundamental -----	5
3. Spurious Emission-----	10
4. Occupied Bandwidth-----	17

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

-Wireless Div. 3FL, 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 435-040

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 428 5700

FAX : +82 31 427 2370

1.2. Details of Applicant

Applicant : Hyundai Mobis Co., Ltd.

Address : 203, Teheran-ro, Gangnam-gu, Seoul, 135-977 Republic of Korea

Contact Person : Choi, Seung-Hoon

Phone No. : +82 31 260 0098

1.3. Description of EUT

Kind of Product	SMART KEY ECU
Model Name	SMK-4E06
Power Supply	DC 12 V (Used by Vehicle battery)
Frequency Range	Tx: 125.00 kHz (LF Antenna) Rx: 433.92 MHz (RF Antenna)
Modulation Technique	ASK
Number of Channels	1
Operating Conditions	-30°C ~ 75°C
Antenna Type	Internal Type (Coil Antenna)

1.4. Declarations by the manufacturer

- RF antenna is only Receiver antenna
- The EUT of antennas cannot operate at the same time.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due.
Spectrum Analyzer	R&S	FSV30	100768	Mar. 27, 2014	Annual	Mar. 27, 2015
Signal Generator	R&S	SMBV100A	255834	Jun. 26, 2013	Annual	Jun. 26, 2014
Loop Antenna	R&S	HFH2-Z2	100118	Jul. 12, 2013	Biennial	Jul. 12, 2015
Bilog Antenna	SCHWARZBECK	VULB9163	396	Jun. 07, 2013	Biennial	Jun. 07, 2015
DC power Supply	Agilent	U8002A	MY49030063	Dec. 12, 2013	Annual	Dec. 12, 2014
Test Receiver	R&S	ESU26	100109	Mar. 04, 2014	Annual	Mar. 04, 2015
Preamplifier	H.P.	8447F	2944A03909	Jun. 28, 2013	Annual	Jun. 28, 2014
Low Pass Filter	Mini-Circuits	NLP-1200+	V 8979400903-1	Jun. 12, 2013	Annual	Jun. 12, 2014
Antenna Master	MA 2000	INN-CO	N/A	N.C.R.	N.C.R.	N.C.R.
Turn Device	DE-3600-RH	INN-CO	N/A	N.C.R.	N.C.R.	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (21.5 m × 13.0 m × 9.0 m)	N/A	N.C.R.	N.C.R.	N.C.R.

1.6. Test Report Revision

Revision	Report number	Description
0	F690501/RF-RTL007632	Initial
1	F690501/RF-RTL007632-1	Add measurement restricted band (0.090 – 0.110 MHz)

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:


APPLIED STANDARD: FCC Part 15 Subpart C 15.209/ IC RSS-210 Issue8, RSS-Gen Issue3			
Section in FCC 15 Subpart B&C §15.209	Section in IC RSS-210 Issue8, RSS-Gen Issue 3	Test Item	Result
15.209(a)	RSS-210 Issue8, 2.5.1 RSS-Gen Issue3, 7.2.5 Table 6	Radiated emission, Spurious Emission and Field Strength of Fundamental	Complied
-	RSS-Gen Issue3, 4.6.1	Occupied Bandwidth	Complied

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


2. Field Strength of Fundamental

2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

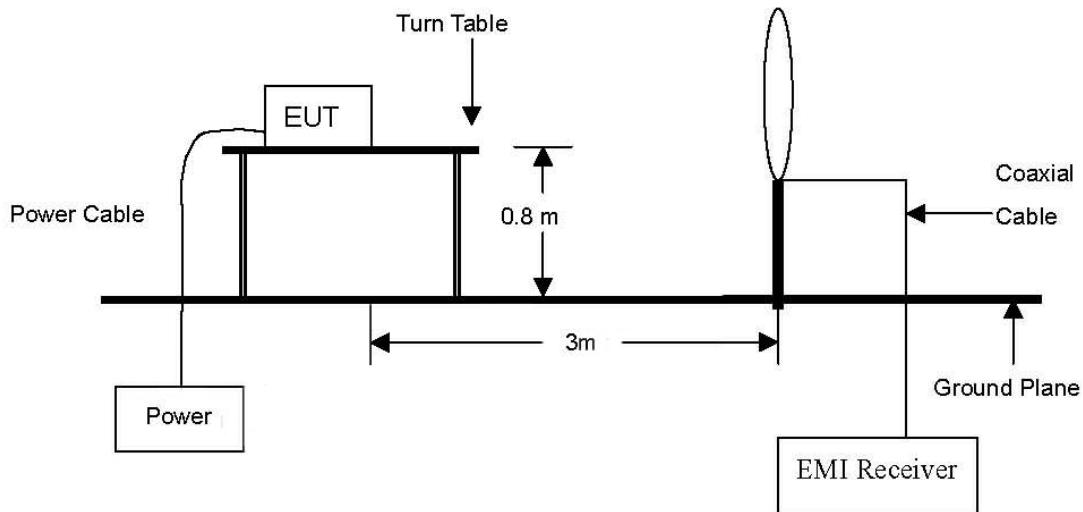

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

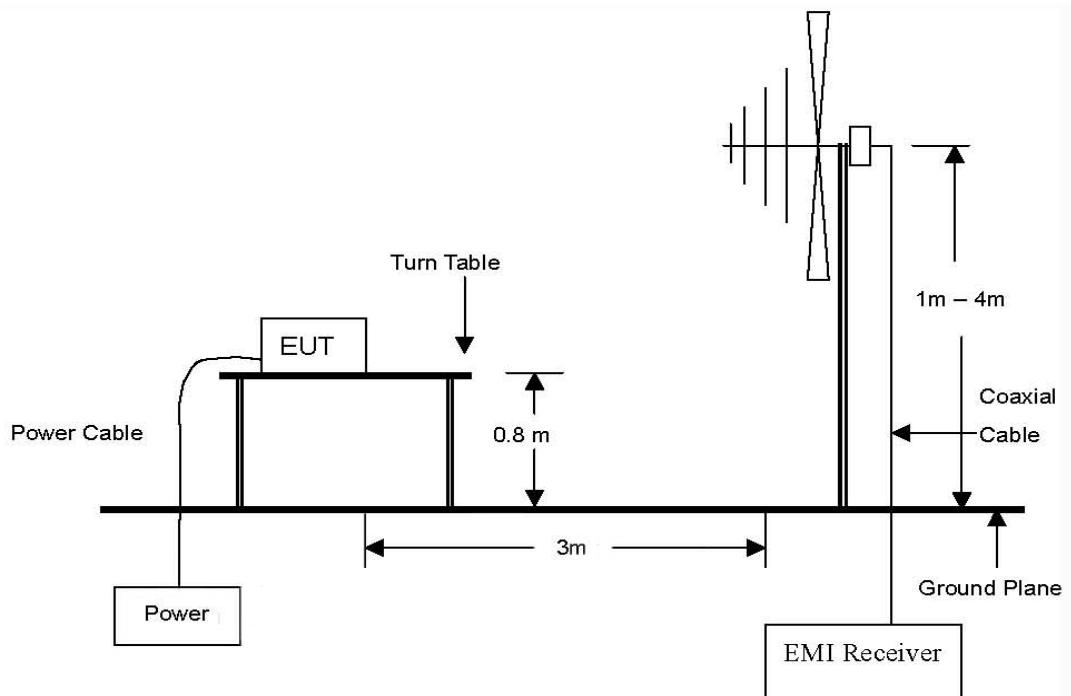

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.2. Limit

2.2.1. Radiated emission limits, general requirements

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 -88	100**	3
88 -216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

2.3.1. Test Procedures for emission from 9 kHz to 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to average Detect Function and Specified Bandwidth with Maximum Hold Mode.

2.3.2. Test Procedures for emission from 30 MHz to 1 000 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. The field strength of spurious emission was measured in three orthogonal EUT position (x-axis, y-axis and z-axis). Worst case is x-axis.

- AST ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 300 m	Limit (dB μ V/m)	Margin (dB)
0.125	54.20	Average	H	18.69	0.04	72.93	-7.07	25.67	32.74

- BUM ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 300 m	Limit (dB μ V/m)	Margin (dB)
0.125	63.70	Average	H	18.69	0.04	82.43	2.43	25.67	23.24

- DRV ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 300 m	Limit (dB μ V/m)	Margin (dB)
0.125	55.50	Average	H	18.69	0.04	74.23	-5.77	25.67	31.44

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- INT1 ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 300 m	Limit (dB μ V/m)	Margin (dB)
0.125	64.20	Average	H	18.69	0.04	82.93	2.93	25.67	22.74

- INT2 ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 300 m	Limit (dB μ V/m)	Margin (dB)
0.125	58.20	Average	H	18.69	0.04	76.93	-3.07	25.67	28.74

- SSB ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual (dB μ V/m) at 300 m	Limit (dB μ V/m)	Margin (dB)
0.125	69.00	Average	H	18.69	0.04	87.73	7.73	25.67	17.94

Note:1. 300 m Result(dB μ V/m) = 3 m Result(dB μ V/m) - 40log(300/3) (dB μ V/m)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. Spurious Emission

3.1. Test Setup

Same as section 2.1 of this report

3.2. Limit

Same as section 2.2 of this report

3.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

3.3.1. Test Procedures for emission from 9 kHz to 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to quasi-peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

3.3.2. Test Procedures for emission from 30 MHz to 1 000 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.4. Test Result

Ambient temperature : (24 ± 1) °C

Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

3.4.1. Spurious emission from 9 kHz to 30 MHz

- AST ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ N/m) at 3 m	Actual ¹ (dB μ N/m) at 300 m or 30 m	Limit (dB μ N/m)	Margin (dB)
0.105	18.20	Quasi-Peak	H	18.70	0.04	36.94	-43.06	27.18	70.24
0.281	7.70	Average	H	18.61	0.05	26.36	-53.64	18.63	72.27
26.410	6.20	Quasi-Peak	H	17.56	0.64	24.40	-15.60	29.54	45.14

- BUM ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ N/m) at 3 m	Actual ¹ (dB μ N/m) at 300 m or 30 m	Limit (dB μ N/m)	Margin (dB)
0.105	21.50	Quasi-Peak	H	18.70	0.04	40.24	-39.76	27.18	66.94
0.857	32.10	Quasi-Peak	H	18.50	0.10	50.70	10.70	28.94	18.24
1.178	28.60	Quasi-Peak	H	18.50	0.12	47.22	7.22	26.18	18.96
2.443	31.20	Quasi-Peak	H	18.50	0.16	49.86	9.86	29.54	19.68
13.558	25.40	Quasi-Peak	H	17.64	0.44	43.48	3.48	29.54	26.06

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- DRV ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual ¹ (dB μ V/m) at 300 m or 30 m	Limit (dB μ V/m)	Margin (dB)
0.106	16.90	Quasi-Peak	H	18.70	0.04	35.64	-44.36	27.10	71.46
1.110	11.60	Quasi-Peak	H	18.50	0.11	30.21	-9.79	26.70	36.49
18.590	6.30	Quasi-Peak	H	17.57	0.53	24.40	-15.60	29.54	45.14

- INT1 ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual ¹ (dB μ V/m) at 300 m or 30 m	Limit (dB μ V/m)	Margin (dB)
0.106	21.90	Quasi-Peak	H	18.70	0.04	40.64	-39.36	27.10	66.46
3.996	11.90	Quasi-Peak	H	18.50	0.22	30.62	-9.38	29.54	38.92
29.744	6.40	Quasi-Peak	H	17.23	0.69	24.32	-15.68	29.54	45.22

- INT2 ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual ¹ (dB μ V/m) at 300 m or 30 m	Limit (dB μ V/m)	Margin (dB)
0.106	23.50	Quasi-Peak	H	18.70	0.04	42.24	-37.76	27.10	64.86
1.194	11.40	Quasi-Peak	H	18.50	0.12	30.02	-9.98	26.06	36.04
25.641	6.20	Quasi-Peak	H	17.64	0.63	24.47	-15.53	29.54	45.07

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- SSB ANT

Radiated Emissions			Ant	Correction Factors		Total		FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB μ V/m) at 3 m	Actual ¹ (dB μ V/m) at 300 m or 30 m	Limit (dB μ V/m)	Margin (dB)
0.094	29.10	Quasi-Peak	H	18.71	0.04	47.85	-32.15	28.14	60.29
0.376	24.90	Average	H	18.56	0.06	43.52	-36.48	16.10	52.58
0.625	16.90	Quasi-Peak	H	18.50	0.08	35.48	-4.52	31.69	36.21
0.876	13.00	Quasi-Peak	H	18.50	0.10	31.60	-8.40	28.75	37.15
29.006	6.30	Quasi-Peak	H	17.30	0.68	24.28	-15.72	29.54	45.26

Note:

1. 300 m Result(dB μ V/m) = 3 m Result(dB μ V/m) – 40log(300/3) (dB μ V/m)
or 30 m Result(dB μ V/m) = 3 m Result(dB μ V/m) – 40log(30/3) (dB μ V/m)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.4.1. Spurious emission from 30 MHz to 1 000 MHz

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. All reading values are peak values.

- AST ANT

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
30.69	44.68	Peak	V	14.42	-27.00	32.10	40.00	7.90
32.55	40.45	Peak	V	14.73	-26.98	28.20	40.00	11.80
40.43	35.00	Peak	H	14.17	-26.87	22.30	40.00	17.70
64.03	37.86	Peak	V	12.90	-26.56	24.20	40.00	15.80
96.04	37.51	Peak	V	13.97	-26.28	25.20	43.50	18.30
144.06	43.20	Peak	V	9.51	-25.81	26.90	43.50	16.60
160.06	47.01	Peak	H	8.45	-25.66	29.80	43.50	13.70
Above 170.00	Not detected	-	-	-	-	-	-	-

- BUM ANT

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
32.87	39.69	Peak	V	14.79	-26.98	27.50	40.00	12.50
64.03	38.96	Peak	V	12.90	-26.56	25.30	40.00	14.70
96.04	41.11	Peak	V	13.97	-26.28	28.80	43.50	14.70
96.04	37.00	Peak	H	12.08	-26.28	22.80	43.50	20.70
160.06	50.71	Peak	H	8.45	-25.66	33.50	43.50	10.00
208.08	42.11	Peak	V	11.76	-25.27	28.60	43.50	14.90
Above 210.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- DRV ANT

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
30.24	37.44	Peak	H	12.57	-27.01	23.00	40.00	17.00
32.75	43.31	Peak	V	14.77	-26.98	31.10	40.00	8.90
96.04	36.81	Peak	V	13.97	-26.28	24.50	43.50	19.00
152.06	46.02	Peak	H	8.12	-25.74	28.40	43.50	15.10
160.06	42.78	Peak	V	9.98	-25.66	27.10	43.50	16.40
Above 170.00	Not detected	-	-	-	-	-	-	-

- INT1 ANT

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
31.25	41.08	Peak	V	14.51	-26.99	28.60	40.00	11.40
39.86	34.58	Peak	H	14.09	-26.87	21.80	40.00	18.20
64.03	38.96	Peak	V	12.90	-26.56	25.30	40.00	14.70
144.06	46.50	Peak	V	9.51	-25.81	30.20	43.50	13.30
208.12	41.11	Peak	V	11.76	-25.27	27.60	43.50	15.90
Above 210.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- INT2 ANT

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
32.95	43.38	Peak	V	14.80	-26.98	31.20	40.00	8.80
64.03	38.86	Peak	V	12.90	-26.56	25.20	40.00	14.80
152.06	45.02	Peak	H	8.12	-25.74	27.40	43.50	16.10
176.07	43.42	Peak	V	10.40	-25.52	28.30	43.50	15.20
184.07	44.38	Peak	H	9.47	-25.45	28.40	43.50	15.10
208.12	42.21	Peak	V	11.76	-25.27	28.70	43.50	14.80
472.20	37.06	Peak	V	18.02	-25.38	29.70	46.00	16.30
Above 480.00	Not detected	-	-	-	-	-	-	-


- SSB ANT

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ N)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
291.82	33.67	Peak	V	13.91	-24.78	22.80	46.00	23.20
657.95	33.21	Peak	H	20.84	-25.05	29.00	46.00	17.00
Above 660.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. Occupied Bandwidth

4.1. Test Setup

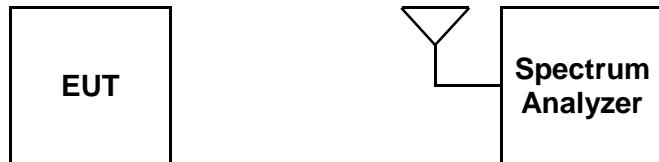

4.2. Limit

None; for reporting purposes only

4.3. Test Procedure

1. The Occupied Bandwidth is measured with a spectrum analyzer connected via a receiving antenna placed near the EUT.
1. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW= 1 kHz, VBW= 3 kHz and Span=50 kHz and detector mode= Sample.
2. The bandwidth of fundamental frequency was measured and recorded.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


4.4. Test Result

Ambient temperature : (24 \pm 1) °C

Relative humidity : 47 % R.H.

- AST ANT


Carrier Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
0.125	11.51	-	99 % Occupied bandwidth

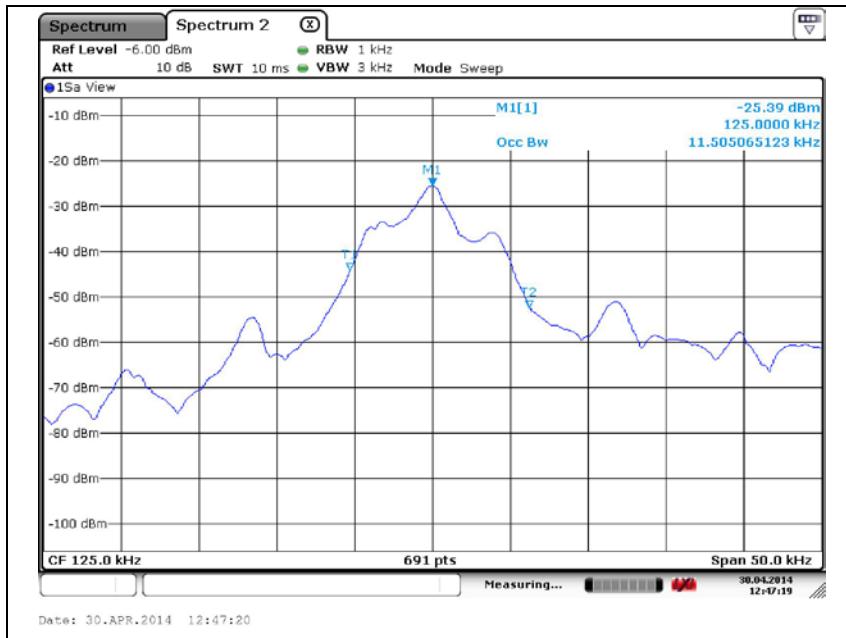

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- BUM ANT


Carrier Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
0.125	11.00	-	99 % Occupied bandwidth

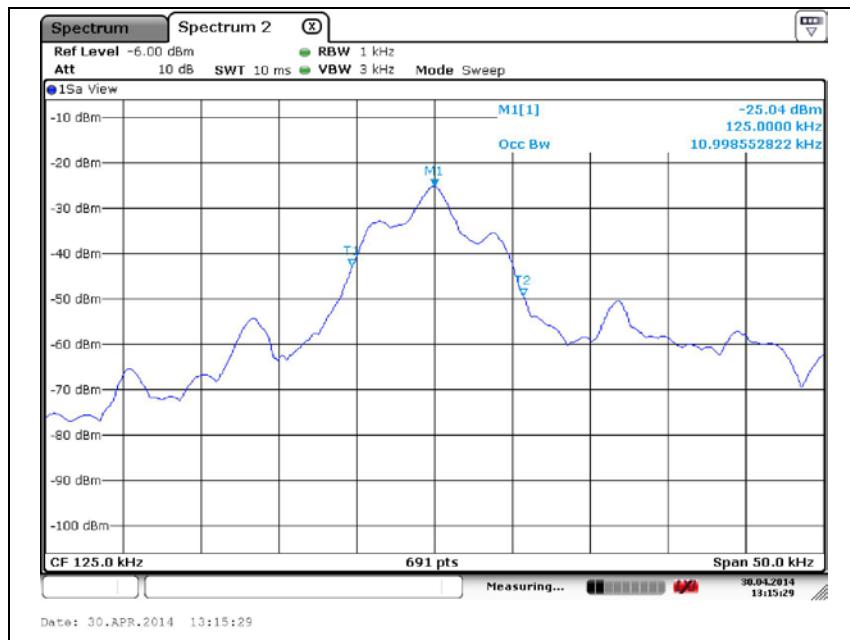

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- DRV ANT

Carrier Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
0.125	14.54	-	99 % Occupied bandwidth

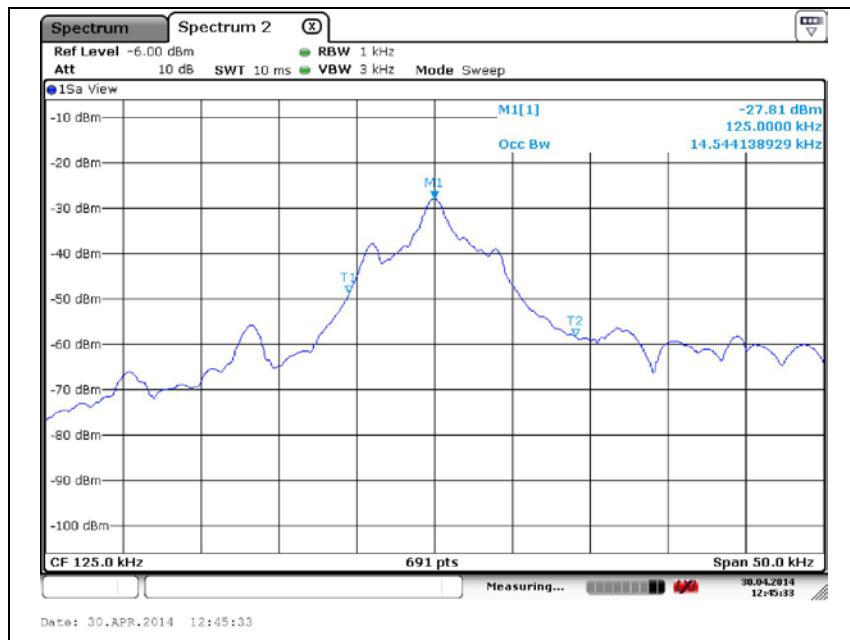

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- INT1 ANT


Carrier Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
0.125	11.29	-	99 % Occupied bandwidth



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- INT2 ANT


Carrier Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
0.125	11.29	-	99 % Occupied bandwidth

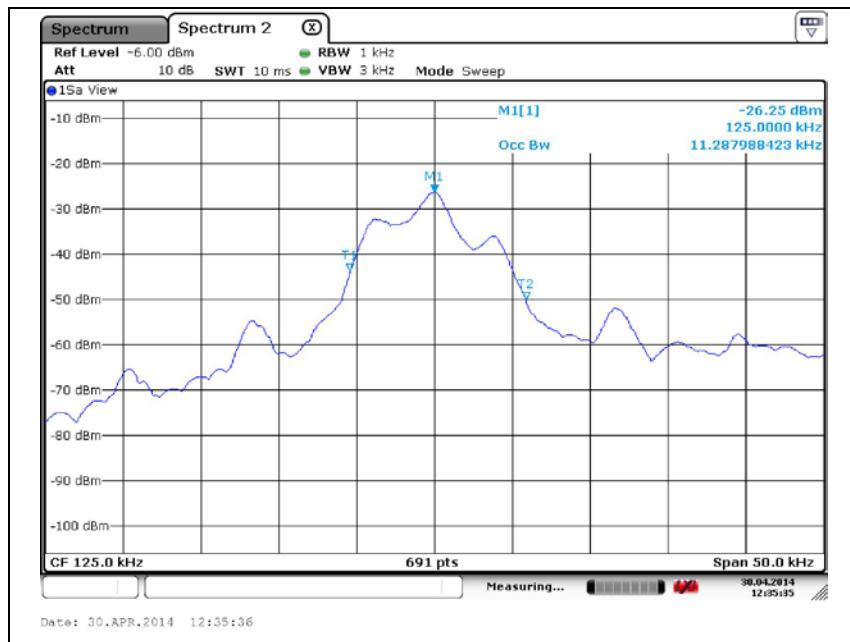

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- SSB ANT

Carrier Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
0.125	20.41	-	99 % Occupied bandwidth

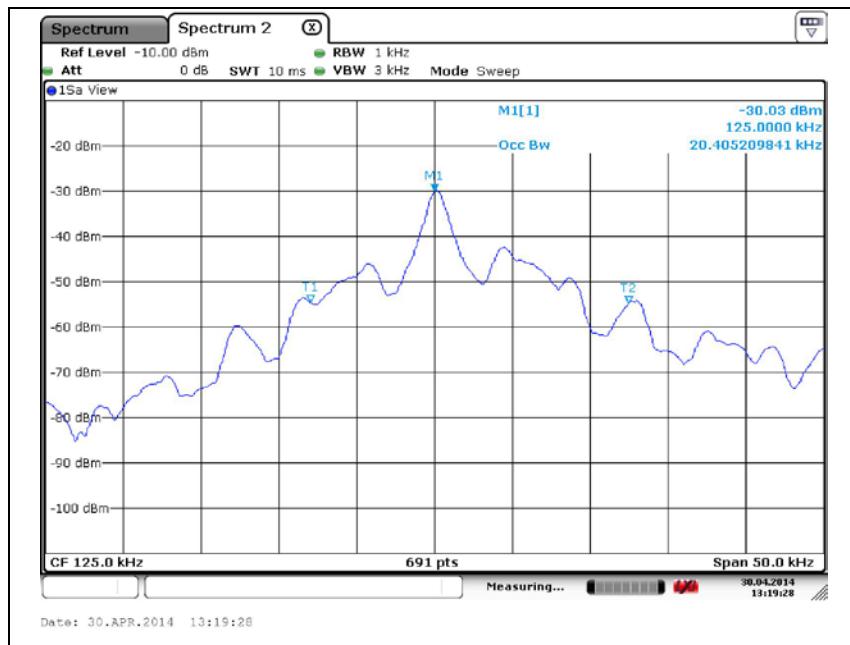

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.