



TEST REPORT

FCC UNII Test for VN551ZZZAN
Certification

APPLICANT

Hyundai Mobis Co., Ltd

REPORT NO.

HCT-RF-2505-FC073-R1

DATE OF ISSUE

June 10, 2025

Tested by
Kyung Jun Woo



Technical Manager
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



TEST REPORT

REPORT NO.
HCT-RF-2505-FC073-R1

DATE OF ISSUE
June 10, 2025

Applicant **Hyundai Mobis Co., Ltd**
203, Teheran-ro, Gangnam-gu, Seoul, Republic of Korea

Product Name	Car infotainment system
Model Name	VN551ZZZAN
FCC ID	TQ8-VN551ZZZAN
Date of Test	February 25, 2025 ~ June 10, 2025
FCC Classification	Unlicensed National Information Infrastructure(NII)
Test Standard Used	FCC Rule Part(s): Part 15.407
Test Results	PASS
Location of Test	<input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing Lab (Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May 16, 2025	Initial Release
1	June 10, 2025	Added the BTLE simultaneous transmission test results.

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

This test report provides test result(s) under the scope accredited by the Korea Laboratory Accreditation Scheme (KOLAS), which signed the ILAC-MRA.
(KOLAS (KS Q ISO/IEC 17025) Accreditation No. KT197)

This test report provides test result(s) under the lab's valid Scope of Accreditation by A2LA (American Association for Laboratory Accreditation), signatory of the ILAC-MRA.
(A2LA (ISO/IEC 17025) Certificate No. 4114.01)

CONTENTS

1. GENERAL INFORMATION	5
EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. MAXIMUM OUTPUT POWER	8
3. TEST METHODOLOGY	9
EUT CONFIGURATION	9
EUT EXERCISE	9
GENERAL TEST PROCEDURES	9
DESCRIPTION OF TEST MODES	10
4. INSTRUMENT CALIBRATION	10
5. FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 EQUIPMENT	10
6. ANTENNA REQUIREMENTS	11
7. MEASUREMENT UNCERTAINTY	11
8. DESCRIPTION OF TESTS	12
9. SUMMARY OF TEST RESULTS	29
10. TEST RESULT	30
10.1 DUTY CYCLE	30
10.2 26 dB Bandwidth	32
10.3 6 dB BANDWIDTH	37
10.4 OUTPUT POWER MEASUREMENT	41
10.5 POWER SPECTRAL DENSITY	45
10.6 FREQUENCY STABILITY	52
10.6.1 80 MHz BW	52
10.7 RADIATED SPURIOUS EMISSIONS	55
10.8 RADIATED RESTRICTED BAND EDGE	65
11. LIST OF TEST EQUIPMENT	78
12. ANNEX A_ TEST SETUP PHOTO	80

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	VN551ZZZAN	
Additional Model	VN550ZZZAN, VN550ZZZXX, VN550ZZZFN, VN550ZZZGX, VN550ZZZKN, VN551ZZZXX, VN551ZZZFN, VN551ZZZGX, VN551ZZZKN, VN555ZZZXX, DA550ZZZGX, DA552ZZZGX, DA551ZZZGX, DA553ZZZGX, DA555ZZZGX	
EUT Type	Car infotainment system	
Power Supply	DC 14.40 V	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	U-NII-1	20 MHz BW : 5180 - 5240
		40 MHz BW : 5190 - 5230
		80 MHz BW : 5210
	U-NII-3	20 MHz BW : 5745 - 5805 40 MHz BW : 5755 - 5795 80 MHz BW : 5775
Dynamic Frequency Selection	Slave without radar detection	
Antenna Specification	Type: Printed on FR-4	
Serial number	Conducted : 00 5V3P100008 Radiated : 00 5V3P100016	

ANTENNA CONFIGURATIONS

1. Antenna configuration

Configurations	SISO		MIMO	
	Ant.1	Ant.2	CDD	SDM
802.11a	O	O	X	X
802.11n	O	O	O	O
802.11ac	O	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2. This device supports simultaneous transmission operation.

Simultaneous transmission Scenario	2.4 GHz WiFi	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	BT	Test Case
Bluetooth + 2.4 GHz WiFi	on	-	-	on(BT)	Scenario1
Bluetooth + 5 GHz WiFi MIMO	-	on	on	on(BT)	Scenario2
Bluetooth + 2.4 GHz WiFi	on	-	-	on(BTLE)	Scenario3
Bluetooth + 5 GHz WiFi MIMO	-	on	on	on(BTLE)	Scenario4
Bluetooth + 5 GHz WiFi SISO Ant.1	-	on	-	on	
Bluetooth + 5 GHz WiFi SISO Ant.2	-	-	on	on	

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = \text{Gmax} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Band	Ant Gain (dBi)		N _{ANT} / N _{SS}	Directional Gain (dBi)	
	ANT1	ANT2		CDD	SDM
UNII 1	3.56	2.05	2 / 2	5.85	3.56
UNII 3	2.67	3.41		6.06	3.41

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional gain(CDD)} = 10 \cdot \log((10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)})^2)/2) \text{ dBi}$$

$$\text{Directional gain(SDM)} = \text{Gmax} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Sample Calculation (Conducted Power, MIMO):

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

$$\text{Conducted Power} = (15.35 \text{ dBm} + 15.12 \text{ dBm}) = (34.276 \text{ mW} + 32.508 \text{ mW}) = 66.784 \text{ mW} = 18.25 \text{ dBm}$$

$$\text{E.I.R.P} = 18.25 \text{ dBm} + 3 \text{ dBi} = 21.25 \text{ dBm}$$

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	Output Power					
		SISO ANT1		SISO ANT2		MIMO_CDD(Ant1+Ant2)	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
U-NII-1	802.11a	5.24	0.003	5.39	0.003	-	-
	802.11n (HT20)	5.17	0.003	5.25	0.003	7.66	0.006
	802.11ac (VHT20)	5.17	0.003	5.22	0.003	7.91	0.006
	802.11n (HT40)	5.10	0.003	5.50	0.004	7.40	0.006
	802.11ac (VHT40)	5.09	0.003	5.48	0.004	7.71	0.006
	802.11ac (VHT80)	5.53	0.004	5.73	0.004	7.74	0.006
U-NII-3	802.11a	5.68	0.004	5.67	0.004	-	-
	802.11n (HT20)	5.53	0.004	5.68	0.004	7.94	0.006
	802.11ac (VHT20)	5.51	0.004	5.68	0.004	7.99	0.006
	802.11n (HT40)	5.50	0.004	5.89	0.004	7.93	0.006
	802.11ac (VHT40)	5.54	0.004	5.74	0.004	7.96	0.006
	802.11ac (VHT80)	5.67	0.004	6.00	0.004	8.05	0.006

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average Measurement Typeor modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak Measurement Typeors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm kHz)
X dB, 99% Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)
Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.54 (Confidence level about 95 %, $k=2$)
Conducted Output Power(Power Meter)	0.54 (Confidence level about 95 %, $k=2$)
Conducted Output Power(Signal Analyzer)	0.68 (Confidence level about 95 %, $k=2$)
Power Spectral Density	1.03 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.68 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.75 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.82 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

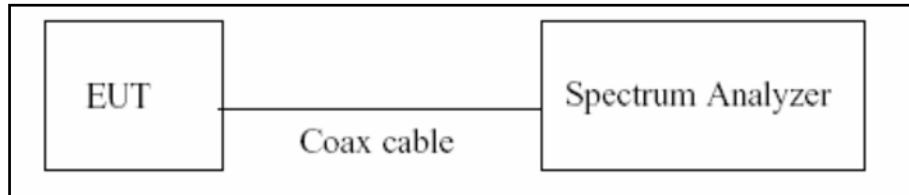

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Measurement Type or = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}}/T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 26 dB Bandwidth & 6 dB Bandwidth

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration



Test Procedure(26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Measurement Type = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW \geq 3 x RBW
3. Measurement Type = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 99 % Bandwidth is used to determine the conducted power limits.


8.3. Output Power Measurement

Limit

Band	Limit
UNII 1	- Master : Not exceed 1 W(=30 dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 3	Not exceed 1 W(=30 dBm)

Test Configuration

Power Meter

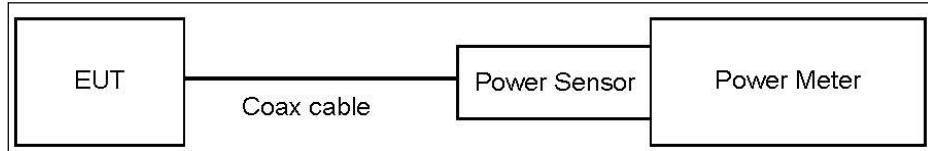

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure (Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep \geq 2 x span/RBW.
6. Sweep time = auto.
7. Measurement Type or = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	11.46
UNII 3	11.46


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 3	30 dBm/500 kHz

Test Configuration

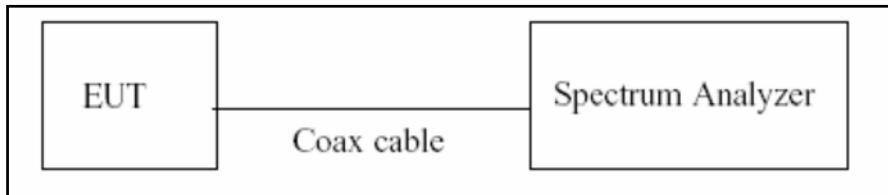

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
→ For portion within the NII-3 be used RBW 510kHz
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2 x span/RBW.
5. Sweep time = auto.
6. Measurement Type or = RMS(i.e., power averaging), if available. Otherwise, use sample Measurement Type or mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	11.46
UNII 3	11.46


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

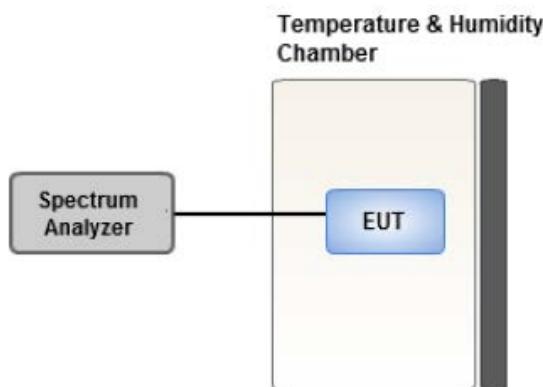

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Measurement Typeors : Quasi Peak and Average Measurement Typeor.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.7. Radiated Test


Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz .
2. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
3. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

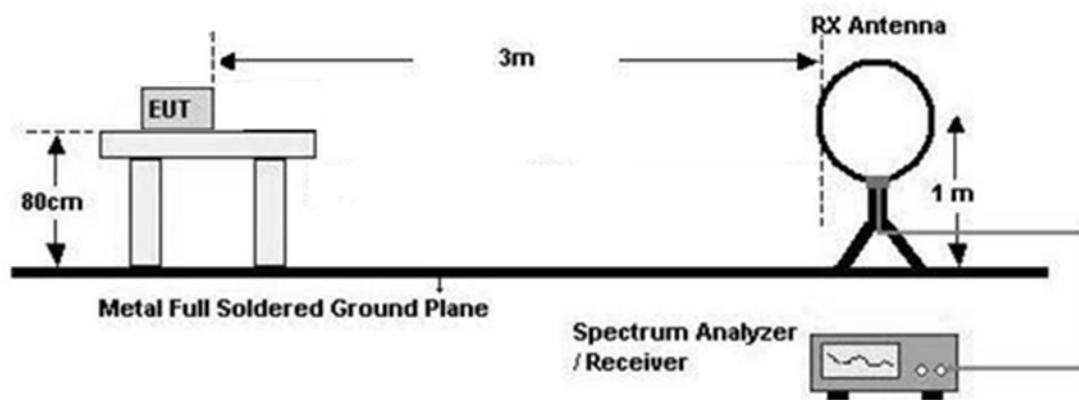

30 MHz - 1 GHz

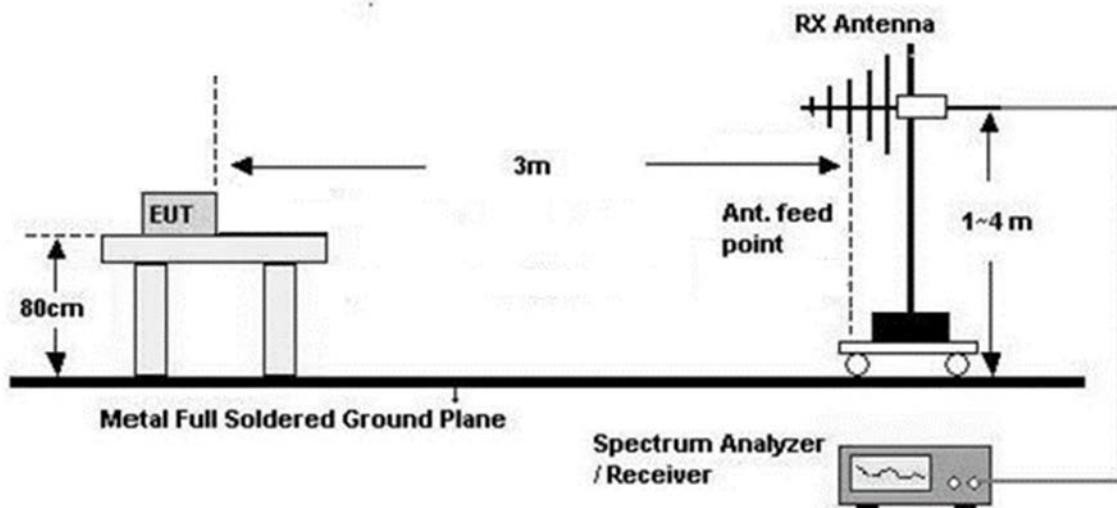

Above 1 GHz

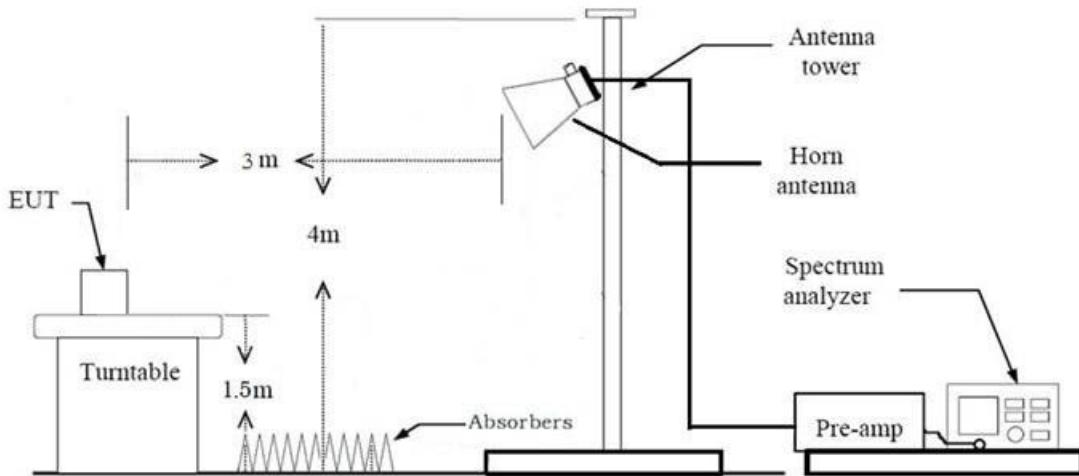**Test Procedure of Radiated spurious emissions (Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor($0.009 \text{ MHz} - 0.490 \text{ MHz}$) = $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor($0.490 \text{ MHz} - 30 \text{ MHz}$) = $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max Hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times \text{RBW}$
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin $> 20 \text{ dB}$ from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in

the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max Hold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW \geq 1/T, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max Hold.
- Allow Max Hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor

9. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep Time = auto
 - Trace mode = Max Hold
 - Allow sweeps to continue until the trace stabilizes.
Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.
 - (2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):
 - RBW = 1 MHz
 - VBW(Duty cycle \geq 98 percent) = VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
 - VBW(Duty cycle is < 98 percent) = VBW \geq 1/T, where T is the minimum transmission duration.
 - The analyzer is set to linear detector mode.
 - Detector = Peak.
 - Sweep time = auto.
 - Trace mode = Max Hold.
 - Allow Max Hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.
8. Measured Frequency Range :
 - 4 500 MHz ~ 5 150 MHz
 - 5 350 MHz ~ 5 460 MHz
 - 5 850 MHz ~ (75 MHz or more above the 5 850 MHz)
9. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
10. Total
 - (1)Measurement(Peak)
= Measured Value(Peak)
 - (2)Measurement(Avg)
= Measured Value (Avg)
 - We apply to the offset in the range 1 GHz - 18 GHz.
 - The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) - Amp. Gain(A.G) + Attenuator (ATT)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.934	0.297	1 000
802.11n(HT20)	MCS0	0.930	0.317	1 000
802.11n(HT40)	MCS0	0.867	0.617	2 000
802.11ac(VHT20)	MCS0	0.929	0.321	1 000
802.11ac(VHT40)	MCS0	0.868	0.613	2 000
802.11ac(VHT80)	MCS0	0.764	1.171	5 000

8.9. Worst case configuration and mode

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. VN551ZZZAN, Additional Models were tested and the worst case results are reported.
(Worst case : VN551ZZZAN)

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Shark Antenna, Stand alone + Shark Antenna + External accessories
 - Worstcase : Stand alone + Shark Antenna + External accessories
- 2 EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
3. All datarate of operation were investigated and the worst case datarate results are reported.
 - 802.11a : 6 Mbps
 - 802.11n: MCS 0
 - 802.11ac: MCS 0
4. Radiated Spurious Emission
 - All modulation of operation were investigated and the worst case modulation results are reported.
 - Worst-case : 802.11a 6 Mbps
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position: Horizontal, Vertical, Parallel to the ground plane
6. VN551ZZZAN, Additional Models were tested and the worst case results are reported.
(Worst case : VN551ZZZAN)

AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. The device only employ battery power for operation.

Radiated test(Simultaneous transmission Scenario)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Shark Antenna, Stand alone + Shark Antenna + External accessories
 - Worstcase : Stand alone + Shark Antenna + External accessories
2. EUT Axis
 - Radiated Spurious Emissions : X
3. All of Simultaneous transmission Scenario were investigated and the worst case configuration results are reported.

Simultaneous transmission Scenario	2.4 GHz WiFi	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	BT	Test Case
Bluetooth + 2.4 GHz WiFi	on	-	-	on(BT)	Scenario1
Bluetooth + 5 GHz WiFi MIMO	-	on	on	on(BT)	Scenario2
Bluetooth + 2.4 GHz WiFi	on	-	-	on(BTLE)	Scenario3
Bluetooth + 5 GHz WiFi MIMO	-	on	on	on(BTLE)	Scenario4
Bluetooth + 5 GHz WiFi SISO Ant.1	-	on	-	on	
Bluetooth + 5 GHz WiFi SISO Ant.2	-	-	on	on	

4. The Simultaneous transmission mode test investigated both intermodulation and radiated spurious emissions. And the worst results were reported.

- Worst result: Radiated spurious emissions
- Intermodulation: No signals are generated.
- Radiated spurious emissions: cf. Section 10.8.

Scenario	Description	Bluetooth Emission	5 GHz Emission
2	Antenna	BT ANT	WLAN ANT(MIMO)
	Channel	78	161
	Data Rate	1 Mbps	MCS 0
	Mode	GFSK	802.11n20

Note : BT Simultaneous transmission Scenario Data refer to [BT] Test Report

Scenario	Description	Bluetooth Emission	5 GHz Emission
4	Antenna	BT/BTLE ANT	WLAN ANT(MIMO)
	Channel	39	161
	Data Rate	1 Mbps	MCS 0
	Mode	1 M Bit/s (255 Bytes)	802.11n20

Note : BT LE Simultaneous transmission Scenario Data refer to [BT LE] Test Report

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26 dB Bandwidth	§ 15.407 (for Power Measurement)	N/A		PASS
6 dB Bandwidth	§ 15.407(e)	>500 kHz (5725-5850 MHz)(UNII-3)		PASS
Maximum Conducted Output Power	§ 15.407(a)(1),(3)	< 250 mW(5150-5250 MHz) <1 W (5725-5850 MHz)	Conducted	PASS
Maximum Power Spectral Density	§ 15.407(a)(1),(3)	<11 dBm/ MHz (5150-5250 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207 15.407(b)(8)	<FCC 15.207 limits		N/A (Note1)
Undesirable Emissions	§ 15.407(b) (1),(3) § 15.407(b)(5)(ii),(iii) § 15.35(b)	<-27 dBm/MHz EIRP (UNII1) cf. Section 8.6 (UNII 3)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(9),(10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

Note

1. The device only employ battery power for operation.
2. The decision rule applies 'simple acceptance'

10. TEST RESULT

10.1 DUTY CYCLE



Mode	Data Rate	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6M	1.426	1.527	0.934	0.297
802.11n(HT20)	MCS0	1.336	1.437	0.930	0.317
802.11n(HT40)	MCS0	0.663	0.764	0.867	0.617
802.11ac(VHT20)	MCS0	1.342	1.445	0.929	0.321
802.11ac(VHT40)	MCS0	0.669	0.770	0.868	0.613
802.11ac(VHT80)	MCS0	0.331	0.433	0.764	1.171

Note:

In order to simplify the report, attached plots were only the lowest data rate.



802.11a

802.11n(HT20)

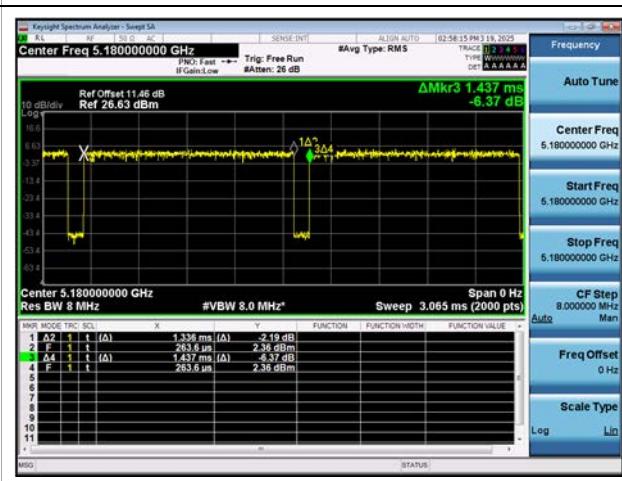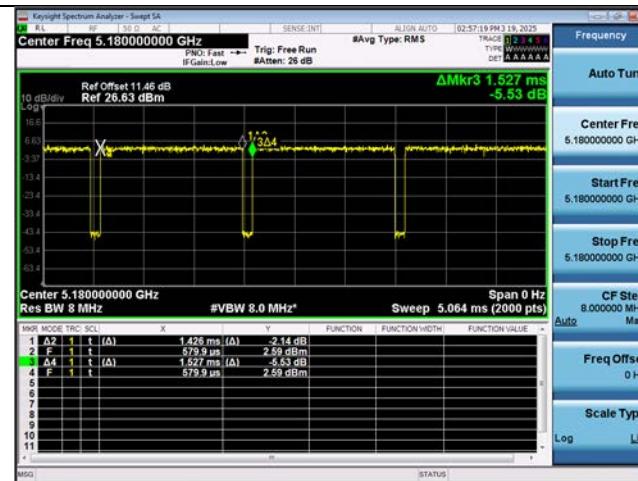



802.11n(HT40)

802.11ac(VHT20)

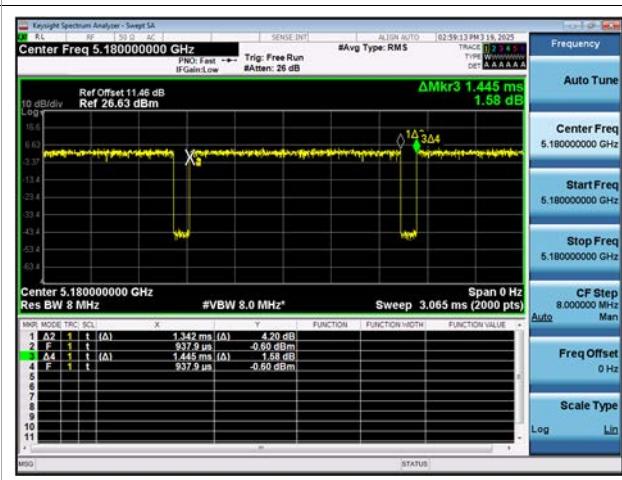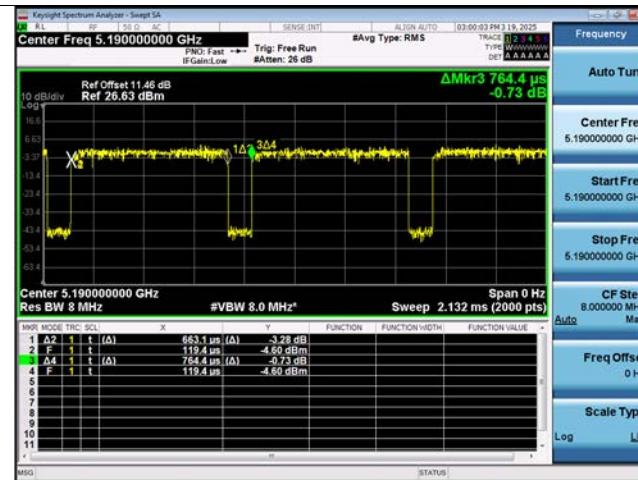

802.11ac(VHT40)

802.11ac(VHT80)

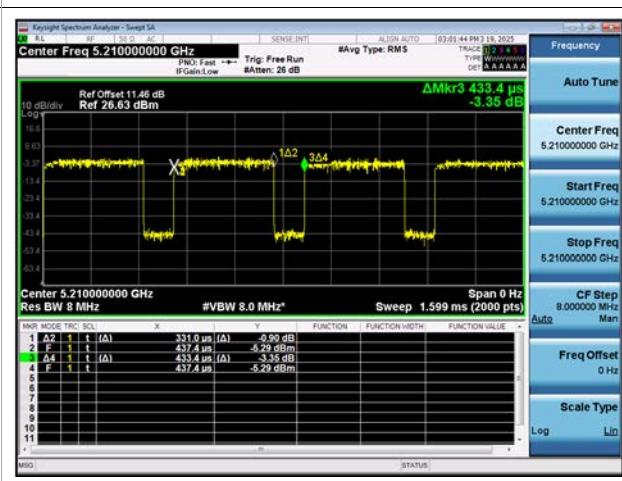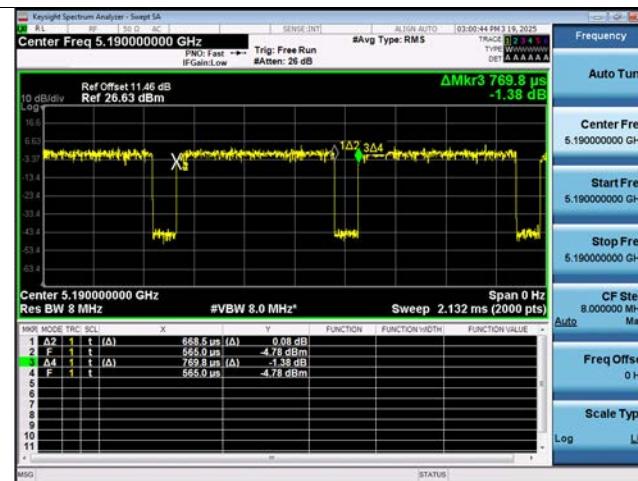

10.2 26 dB Bandwidth

[ANT1]

Mode : 802.11a

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5180	36	20.81	16.629
	5200	40	20.96	16.637
	5240	48	21.19	16.630
UNII3	5745	149	21.11	16.641
	5785	157	20.99	16.649
	5805	161	21.28	16.649

Mode : 802.11n(HT20)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5180	36	21.38	17.829
	5200	40	21.41	17.807
	5240	48	21.25	17.797
UNII3	5745	149	21.60	17.773
	5785	157	21.29	17.810
	5805	161	21.29	17.794

Mode : 802.11ac(VHT20)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5180	36	21.47	17.787
	5200	40	21.25	17.764
	5240	48	21.24	17.785
UNII3	5745	149	21.62	17.749
	5785	157	21.53	17.832
	5805	161	21.40	17.823

Mode : 802.11n(HT40)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5190	38	39.63	36.168
	5230	46	39.37	36.123
UNII3	5755	151	39.65	36.177
	5795	159	39.66	36.163

Mode : 802.11ac(VHT40)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5190	38	39.50	36.122
	5230	46	39.46	36.124
UNII3	5755	151	39.69	36.161
	5795	159	39.57	36.087

Mode : 802.11ac(VHT80)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5210	42	80.93	75.554
UNII3	5775	155	81.14	75.631

[ANT2]

Mode : 802.11a

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5180	36	21.04	16.615
	5200	40	20.93	16.640
	5240	48	20.91	16.631
UNII3	5745	149	21.03	16.640
	5785	157	20.97	16.621
	5805	161	20.98	16.639

Mode : 802.11n(HT20)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5180	36	21.25	17.717
	5200	40	21.30	17.708
	5240	48	21.34	17.751
UNII3	5745	149	21.30	17.710
	5785	157	21.30	17.751
	5805	161	21.31	17.733

Mode : 802.11ac(VHT20)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5180	36	21.26	17.714
	5200	40	21.27	17.723
	5240	48	21.21	17.728
UNII3	5745	149	21.15	17.720
	5785	157	21.36	17.740
	5805	161	21.17	17.740

Mode : 802.11n(HT40)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5190	38	39.29	36.089
	5230	46	39.26	36.070
UNII3	5755	151	39.20	36.068
	5795	159	39.35	36.095

Mode : 802.11ac(VHT40)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5190	38	39.14	36.087
	5230	46	39.19	36.045
UNII3	5755	151	39.15	36.087
	5795	159	39.27	36.061

Mode : 802.11ac(VHT80)

BAND	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
UNII1	5210	42	80.74	75.379
UNII3	5775	155	80.34	75.531

□ Test Plots [26 dB Bandwidth]

Note: In order to simplify the report, attached plots were only the widest channel per channel bandwidth.

[ANT1]

802.11a 26 dB Bandwidth (CH 161)



802.11n(HT20) 26 dB Bandwidth (CH 149)




802.11ac(VHT20) 26 dB Bandwidth (CH 149)



802.11n(HT40) 26 dB Bandwidth (CH 159)



802.11ac(VHT40) 26 dB Bandwidth (CH 151)

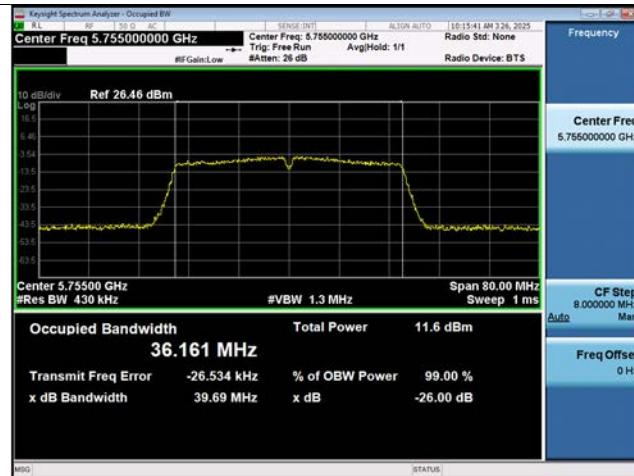

802.11ac(VHT80) 26 dB Bandwidth (CH 155)



[ANT2]


802.11a 26 dB Bandwidth (CH 36)



802.11n(HT20) 26 dB Bandwidth (CH 48)



802.11ac(VHT20) 26 dB Bandwidth (CH 157)

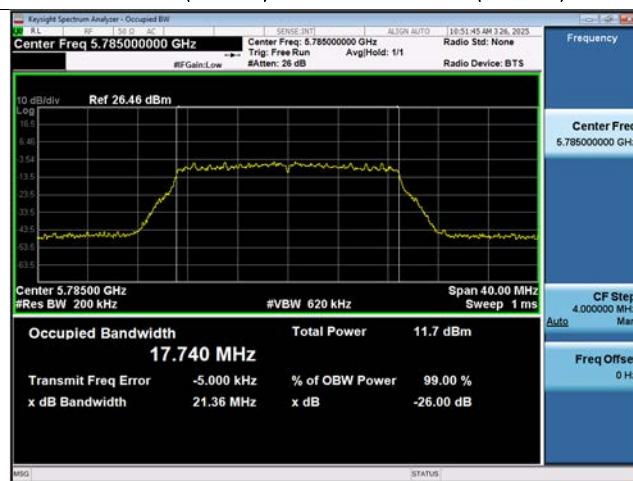

802.11n(HT40) 26 dB Bandwidth (CH 159)



802.11ac(VHT40) 26 dB Bandwidth (CH 159)



802.11ac(VHT80) 26 dB Bandwidth (CH 42)



10.3 6 dB BANDWIDTH

[ANT1]

Mode : 802.11a

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5745	149	16.36	> 0.5
	5785	157	16.35	> 0.5
	5805	161	16.34	> 0.5

Mode : 802.11n(HT20)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5745	149	17.61	> 0.5
	5785	157	17.31	> 0.5
	5805	161	17.59	> 0.5

Mode : 802.11ac(VHT20)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5745	149	17.59	> 0.5
	5785	157	17.58	> 0.5
	5805	161	17.61	> 0.5

Mode : 802.11n(HT40)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5755	151	35.60	> 0.5
	5795	159	35.64	> 0.5

Mode : 802.11ac(VHT40)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5755	151	35.34	> 0.5
	5795	159	35.61	> 0.5

Mode : 802.11ac(VHT80)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5775	155	75.48	> 0.5

[ANT2]

Mode : 802.11a

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5745	149	16.34	> 0.5
	5785	157	16.36	> 0.5
	5805	161	16.34	> 0.5

Mode : 802.11n(HT20)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5745	149	17.61	> 0.5
	5785	157	17.60	> 0.5
	5805	161	17.63	> 0.5

Mode : 802.11ac(VHT20)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5745	149	17.64	> 0.5
	5785	157	17.63	> 0.5
	5805	161	17.60	> 0.5

Mode : 802.11n(HT40)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5755	151	36.34	> 0.5
	5795	159	36.25	> 0.5

Mode : 802.11ac(VHT40)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5755	151	35.81	> 0.5
	5795	159	36.10	> 0.5

Mode : 802.11ac(VHT80)

BAND	Freq. [MHz]	CH.	6 dB Bandwidth [MHz]	Limit [MHz]
UNII3	5775	155	75.56	> 0.5

□ Test Plots [ANT1]

Note: In order to simplify the report, attached plots were only the narrowest channel.

802.11a 6 dB Bandwidth (CH 161)



802.11n(HT20) 6 dB Bandwidth (CH 157)




802.11ac(VHT20) 6 dB Bandwidth (CH 157)



802.11n(HT40) 6 dB Bandwidth (CH 151)



802.11ac(VHT40) 6 dB Bandwidth (CH 151)

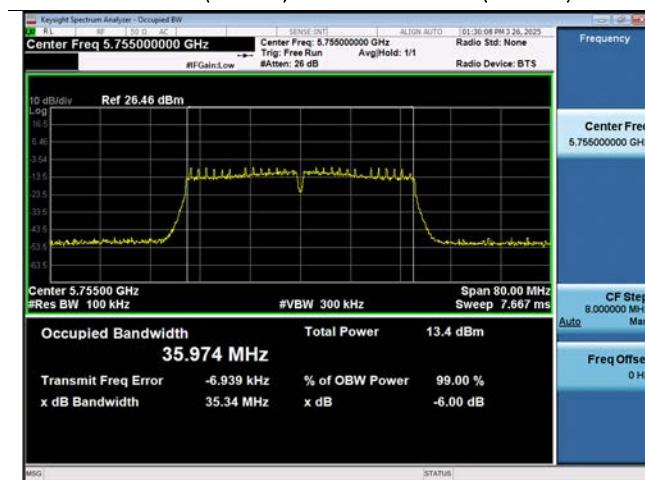


802.11ac(VHT80) 6 dB Bandwidth (CH 155)



□ Test Plots [ANT2]

Note: In order to simplify the report, attached plots were only the narrowest channel.


802.11a 6 dB Bandwidth (CH 161)

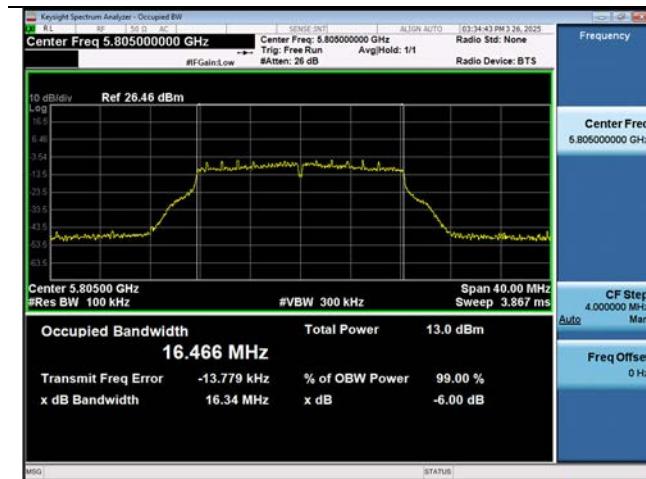

802.11n(HT20) 6 dB Bandwidth (CH 157)




802.11ac(VHT20) 6 dB Bandwidth (CH 161)

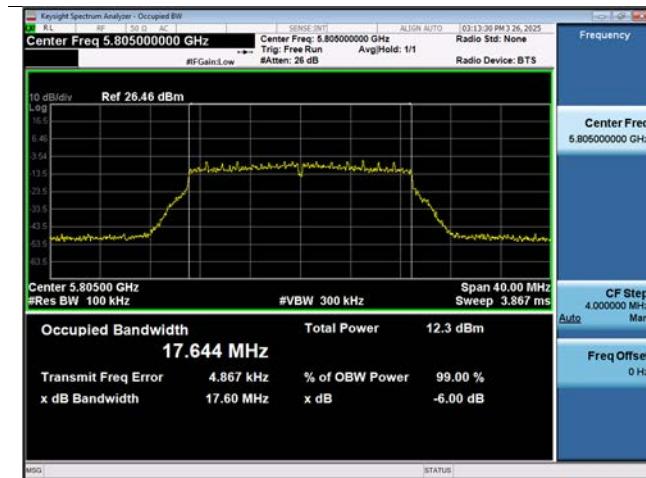


802.11n(HT40) 6 dB Bandwidth (CH 159)



802.11ac(VHT40) 6 dB Bandwidth (CH 151)

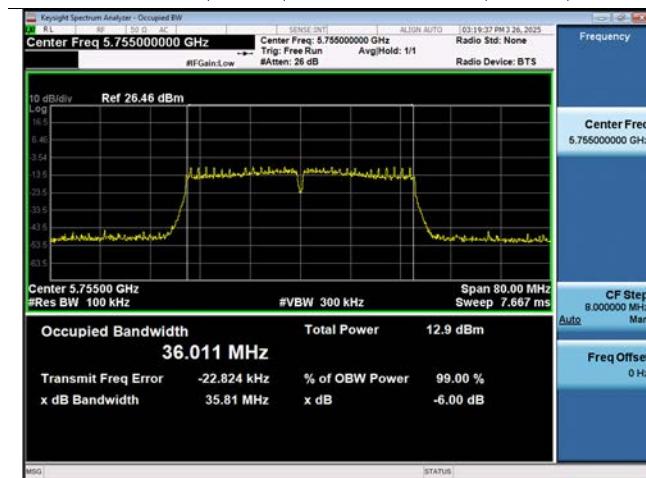

802.11ac(VHT80) 6 dB Bandwidth (CH 155)

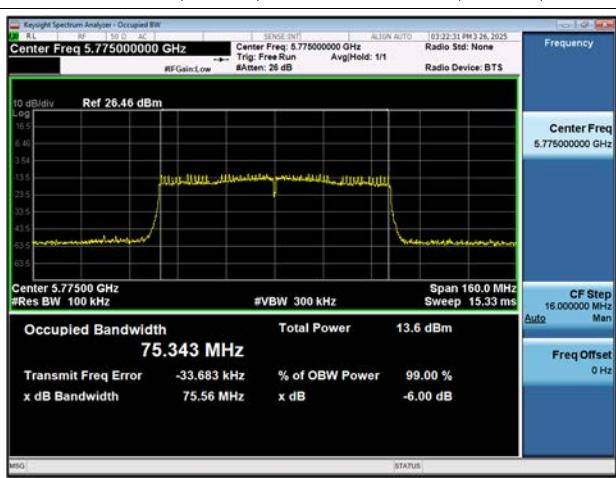

10.4 OUTPUT POWER MEASUREMENT

Note:

Ant Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

MIMO(CDD) UNII3 Limit : 29.94 dBm(Antenna Gain 6.06 dB, 30 - 0.06 = 29.94 dBm)

[SISO ANT1]

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5180	36	6M	a	4.94	0.30	5.24	23.98
	5200	40	6M	a	4.77	0.30	5.07	23.98
	5240	48	6M	a	4.91	0.30	5.21	23.98
UNII3	5745	149	6M	a	5.38	0.30	5.68	30.00
	5785	157	6M	a	5.13	0.30	5.43	30.00
	5805	161	6M	a	5.19	0.30	5.49	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5180	36	MCS0	n20	4.61	0.32	4.93	23.98
	5200	40	MCS0	n20	4.57	0.32	4.89	23.98
	5240	48	MCS0	n20	4.85	0.32	5.17	23.98
UNII3	5745	149	MCS0	n20	5.21	0.32	5.53	30.00
	5785	157	MCS0	n20	5.04	0.32	5.36	30.00
	5805	161	MCS0	n20	5.14	0.32	5.46	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5180	36	MCS0	ac20	4.62	0.32	4.94	23.98
	5200	40	MCS0	ac20	4.70	0.32	5.02	23.98
	5240	48	MCS0	ac20	4.85	0.32	5.17	23.98
UNII3	5745	149	MCS0	ac20	5.18	0.32	5.50	30.00
	5785	157	MCS0	ac20	5.19	0.32	5.51	30.00
	5805	161	MCS0	ac20	5.11	0.32	5.43	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5190	38	MCS0	n40	4.37	0.62	4.99	23.98
	5230	46	MCS0	n40	4.48	0.62	5.10	23.98
UNII3	5755	151	MCS0	n40	4.79	0.62	5.41	30.00
	5795	159	MCS0	n40	4.88	0.62	5.50	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5190	38	MCS0	ac40	4.42	0.61	5.03	23.98
	5230	46	MCS0	ac40	4.48	0.61	5.09	23.98
UNII3	5755	151	MCS0	ac40	4.93	0.61	5.54	30.00
	5795	159	MCS0	ac40	4.84	0.61	5.45	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5210	42	MCS0	ac80	4.36	1.17	5.53	23.98
UNII3	5775	155	MCS0	ac80	4.50	1.17	5.67	30.00

[SISO ANT2]

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5180	36	6M	a	4.95	0.30	5.25	23.98
	5200	40	6M	a	4.93	0.30	5.23	23.98
	5240	48	6M	a	5.09	0.30	5.39	23.98
UNII3	5745	149	6M	a	5.37	0.30	5.67	30.00
	5785	157	6M	a	5.32	0.30	5.62	30.00
	5805	161	6M	a	5.30	0.30	5.60	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5180	36	MCS0	n20	4.86	0.32	5.18	23.98
	5200	40	MCS0	n20	4.84	0.32	5.16	23.98
	5240	48	MCS0	n20	4.93	0.32	5.25	23.98
UNII3	5745	149	MCS0	n20	5.33	0.32	5.65	30.00
	5785	157	MCS0	n20	5.34	0.32	5.66	30.00
	5805	161	MCS0	n20	5.36	0.32	5.68	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5180	36	MCS0	ac20	4.75	0.32	5.07	23.98
	5200	40	MCS0	ac20	4.90	0.32	5.22	23.98
	5240	48	MCS0	ac20	4.87	0.32	5.19	23.98
UNII3	5745	149	MCS0	ac20	5.35	0.32	5.67	30.00
	5785	157	MCS0	ac20	5.36	0.32	5.68	30.00
	5805	161	MCS0	ac20	5.34	0.32	5.66	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5190	38	MCS0	n40	4.86	0.62	5.48	23.98
	5230	46	MCS0	n40	4.88	0.62	5.50	23.98
UNII3	5755	151	MCS0	n40	5.17	0.62	5.79	30.00
	5795	159	MCS0	n40	5.27	0.62	5.89	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5190	38	MCS0	ac40	4.84	0.61	5.45	23.98
	5230	46	MCS0	ac40	4.87	0.61	5.48	23.98
UNII3	5755	151	MCS0	ac40	5.13	0.61	5.74	30.00
	5795	159	MCS0	ac40	5.13	0.61	5.74	30.00

Band	Freq. [MHz]	CH.	Worstcase Datarate	Mode (802.11)	Measured Power [dBm]	Duty cycle Fcator [dB]	Total Power [dBm]	Limit [dBm]
UNII1	5210	42	MCS0	ac80	4.56	1.17	5.73	23.98
UNII3	5775	155	MCS0	ac80	4.83	1.17	6.00	30.00

[MIMO_CDD(Ant1+Ant2)]

Freq. [MHz]	CH.	Datarate	Mode (802.11)	Total Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
5180	36	MCS0	n20	4.31	4.61	7.47	23.98
5200	40	MCS0	n20	3.98	4.44	7.22	23.98
5240	48	MCS0	n20	4.58	4.72	7.66	23.98
5745	149	MCS0	n20	4.61	4.96	7.80	29.94
5785	157	MCS0	n20	4.58	4.93	7.77	29.94
5805	161	MCS0	n20	4.60	5.24	7.94	29.94

Freq. [MHz]	CH.	Datarate	Mode (802.11)	Total Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
5180	36	MCS0	ac20	4.63	4.72	7.69	23.98
5200	40	MCS0	ac20	5.18	4.59	7.91	23.98
5240	48	MCS0	ac20	4.67	4.88	7.79	23.98
5745	149	MCS0	ac20	4.59	4.83	7.72	29.94
5785	157	MCS0	ac20	4.54	5.15	7.87	29.94
5805	161	MCS0	ac20	4.63	5.30	7.99	29.94

Freq. [MHz]	CH.	Datarate	Mode (802.11)	Total Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
5190	38	MCS0	n40	4.07	4.54	7.32	23.98
5230	46	MCS0	n40	4.19	4.59	7.40	23.98
5755	151	MCS0	n40	4.63	4.86	7.75	29.94
5795	159	MCS0	n40	4.36	5.42	7.93	29.94

Freq. [MHz]	CH.	Datarate	Mode (802.11)	Total Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
5190	38	MCS0	ac40	4.46	4.93	7.71	23.98
5230	46	MCS0	ac40	4.18	4.61	7.41	23.98
5755	151	MCS0	ac40	4.59	5.01	7.82	29.94
5795	159	MCS0	ac40	4.58	5.28	7.96	29.94

Freq. [MHz]	CH.	Datarate	Mode (802.11)	Total Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
5210	42	MCS0	ac80	4.46	4.99	7.74	23.98
5775	155	MCS0	ac80	4.85	5.22	8.05	29.94

10.5 POWER SPECTRAL DENSITY

Note:

Ant Total PSD [dBm/MHz] = Measured PSD [dBm/MHz] + Duty Cycle Factor [dB]

MIMO(CDD) UNII3 Limit : 29.94 dBm/500 kHz(Antenna Gain 6.06 dB, 30 - 0.06 = 29.94 dBm/500 kHz)

[SISO ANT1]

Mode : 802.11a

Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5180	36	6M	-5.543	0.297	-5.246	11.00
	5200	40	6M	-5.486	0.297	-5.189	11.00
	5240	48	6M	-5.471	0.297	-5.174	11.00
UNII3	5745	149	6M	-7.742	0.297	-7.445	30 dBm/500kHz
	5785	157	6M	-7.578	0.297	-7.281	30 dBm/500kHz
	5805	161	6M	-7.657	0.297	-7.360	30 dBm/500kHz

Mode : 802.11n(HT20)

Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5180	36	MCS0	-5.234	0.317	-4.917	11.00
	5200	40	MCS0	-5.557	0.317	-5.240	11.00
	5240	48	MCS0	-5.414	0.317	-5.097	11.00
UNII3	5745	149	MCS0	-7.732	0.317	-7.415	30 dBm/500kHz
	5785	157	MCS0	-7.884	0.317	-7.567	30 dBm/500kHz
	5805	161	MCS0	-7.866	0.317	-7.549	30 dBm/500kHz

Mode : 802.11ac(VHT20)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5180	36	MCS0	-5.660	0.321	-5.339	11.00
	5200	40	MCS0	-5.591	0.321	-5.270	11.00
	5240	48	MCS0	-5.537	0.321	-5.216	11.00
UNII3	5745	149	MCS0	-7.685	0.321	-7.364	30 dBm/500kHz
	5785	157	MCS0	-7.908	0.321	-7.587	30 dBm/500kHz
	5805	161	MCS0	-7.892	0.321	-7.571	30 dBm/500kHz

Mode : 802.11n(HT40)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5190	38	MCS0	-8.746	0.617	-8.129	11.00
	5230	46	MCS0	-8.765	0.617	-8.148	11.00
UNII3	5755	151	MCS0	-11.004	0.617	-10.387	30 dBm/500kHz
	5795	159	MCS0	-11.103	0.617	-10.486	30 dBm/500kHz

Mode : 802.11ac(VHT40)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5190	38	MCS0	-8.751	0.613	-8.138	11.00
	5230	46	MCS0	-8.589	0.613	-7.976	11.00
UNII3	5755	151	MCS0	-10.926	0.613	-10.313	30 dBm/500kHz
	5795	159	MCS0	-11.174	0.613	-10.561	30 dBm/500kHz

Mode : 802.11ac(VHT80)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5210	42	MCS0	-12.003	1.171	-10.832	11.00
UNII3	5775	155	MCS0	-14.547	1.171	-13.376	30 dBm/500kHz

[SISO ANT2]

Mode : 802.11a							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5180	36	6M	-5.211	0.297	-4.914	11.00
	5200	40	6M	-5.426	0.297	-5.129	11.00
	5240	48	6M	-5.167	0.297	-4.870	11.00
UNII3	5745	149	6M	-7.417	0.297	-7.120	30 dBm/500kHz
	5785	157	6M	-7.455	0.297	-7.158	30 dBm/500kHz
	5805	161	6M	-7.457	0.297	-7.160	30 dBm/500kHz

Mode : 802.11n(HT20)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5180	36	MCS0	-5.697	0.317	-5.380	11.00
	5200	40	MCS0	-5.594	0.317	-5.277	11.00
	5240	48	MCS0	-5.446	0.317	-5.129	11.00
UNII3	5745	149	MCS0	-7.656	0.317	-7.339	30 dBm/500kHz
	5785	157	MCS0	-7.737	0.317	-7.420	30 dBm/500kHz
	5805	161	MCS0	-7.888	0.317	-7.571	30 dBm/500kHz

Mode : 802.11ac(VHT20)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5180	36	MCS0	-5.651	0.321	-5.330	11.00
	5200	40	MCS0	-5.522	0.321	-5.201	11.00
	5240	48	MCS0	-5.529	0.321	-5.208	11.00
UNII3	5745	149	MCS0	-7.639	0.321	-7.318	30 dBm/500kHz
	5785	157	MCS0	-7.768	0.321	-7.447	30 dBm/500kHz
	5805	161	MCS0	-7.771	0.321	-7.450	30 dBm/500kHz

Mode : 802.11n(HT40)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5190	38	MCS0	-8.586	0.617	-7.969	11.00
	5230	46	MCS0	-8.432	0.617	-7.815	11.00
UNII3	5755	151	MCS0	-10.966	0.617	-10.349	30 dBm/500kHz
	5795	159	MCS0	-11.009	0.617	-10.392	30 dBm/500kHz

Mode : 802.11ac(VHT40)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5190	38	MCS0	-8.571	0.613	-7.958	11.00
	5230	46	MCS0	-8.491	0.613	-7.878	11.00
UNII3	5755	151	MCS0	-10.787	0.613	-10.174	30 dBm/500kHz
	5795	159	MCS0	-10.928	0.613	-10.315	30 dBm/500kHz

Mode : 802.11ac(VHT80)							
Band	Freq. [MHz]	CH.	Worstcase Datarate	Measured PSD [dBm/MHz]	Duty cycle Fcator [dB]	Total PSD [dBm/MHz]	Limit [dBm/MHz]
UNII1	5210	42	MCS0	-11.597	1.171	-10.426	11.00
UNII3	5775	155	MCS0	-14.619	1.171	-13.448	30 dBm/500kHz

[MIMO_CDD(Ant1+Ant2)]

Mode : 802.11n(HT20)						
Freq. [MHz]	CH.	Datarate	Total Power Spectral Density [dBm/MHz]			Limit [dBm/MHz]
			ANT1	ANT2	MIMO	
5180	36	MCS0	-6.084	-6.025	-3.045	11.00
5200	40	MCS0	-6.347	-6.262	-3.294	11.00
5240	48	MCS0	-6.126	-5.861	-2.982	11.00
5745	149	MCS0	-8.517	-8.197	-5.344	29.94 dBm/500kHz
5785	157	MCS0	-8.480	-8.338	-5.399	29.94 dBm/500kHz
5805	161	MCS0	-8.341	-8.338	-5.330	29.94 dBm/500kHz

Mode : 802.11ac(VHT20)						
Freq. [MHz]	CH.	Datarate	Total Power Spectral Density [dBm/MHz]			Limit [dBm/MHz]
			ANT1	ANT2	MIMO	
5180	36	MCS0	-6.301	-6.065	-3.171	11.00
5200	40	MCS0	-6.440	-6.242	-3.329	11.00
5240	48	MCS0	-6.121	-5.825	-2.960	11.00
5745	149	MCS0	-8.146	-8.213	-5.169	29.94 dBm/500kHz
5785	157	MCS0	-8.174	-8.230	-5.191	29.94 dBm/500kHz
5805	161	MCS0	-8.144	-8.194	-5.158	29.94 dBm/500kHz

Mode : 802.11n(HT40)						
Freq. [MHz]	CH.	Datarate	Total Power Spectral Density [dBm/MHz]			Limit [dBm/MHz]
			ANT1	ANT2	MIMO	
5190	38	MCS0	-8.884	-8.501	-5.678	11.00
5230	46	MCS0	-8.689	-8.451	-5.558	11.00
5755	151	MCS0	-11.176	-10.793	-7.970	29.94 dBm/500kHz
5795	159	MCS0	-11.234	-11.104	-8.158	29.94 dBm/500kHz

Mode : 802.11n(VHT40)						
Freq. [MHz]	CH.	Datarate	Total Power Spectral Density [dBm/MHz]			Limit [dBm/MHz]
			ANT1	ANT2	MIMO	
5190	38	MCS0	-8.684	-8.616	-5.640	11.00
5230	46	MCS0	-8.744	-8.611	-5.667	11.00
5755	151	MCS0	-11.141	-10.978	-8.049	29.94 dBm/500kHz
5795	159	MCS0	-11.180	-10.999	-8.078	29.94 dBm/500kHz

Mode : 802.11ac(VHT80)						
Freq. [MHz]	CH.	Datarate	Total Power Spectral Density [dBm/MHz]			Limit [dBm/MHz]
			ANT1	ANT2	MIMO	
5210	42	MCS0	-11.390	-11.568	-8.468	11.00
5775	155	MCS0	-14.437	-14.185	-11.299	29.94 dBm/500kHz

□ Test Plots

Note: In order to simplify the report, attached plots were only channel of the highest PSD.

[SISO ANT1]


Bandwidth 20M, 802.11n(HT20) (Ch. 36)



Bandwidth 40M, 802.11ac(VHT40) (Ch. 46)



Bandwidth 80M, 802.11ac(VHT80) (Ch. 42)

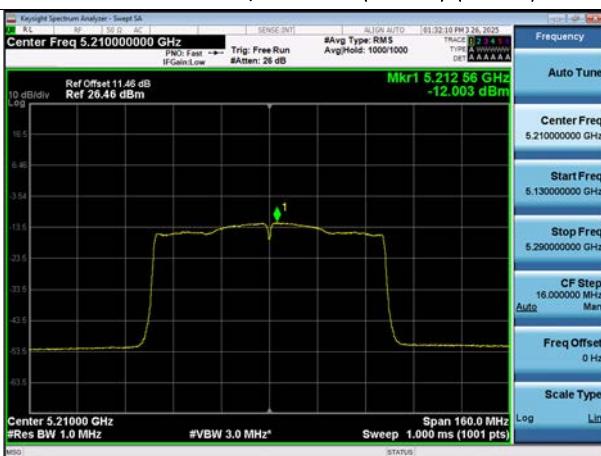

[SISO ANT2]

Bandwidth 20M, 802.11a (Ch. 48)



Bandwidth 40M, 802.11n(HT40) (Ch. 46)



Bandwidth 80M, 802.11ac(VHT80) (Ch. 42)




[MIMO_CDD(Ant1+Ant2)]

Bandwidth 20M, 802.11ac(VHT20) (Ch. 48)

ANT1




ANT2

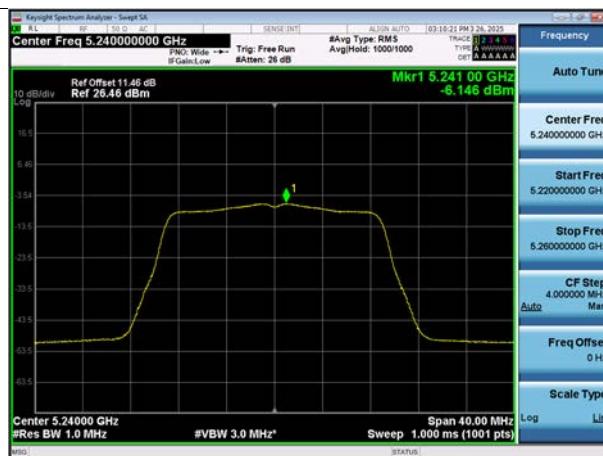


Bandwidth 40M, 802.11n(HT40) (Ch. 46)

ANT1

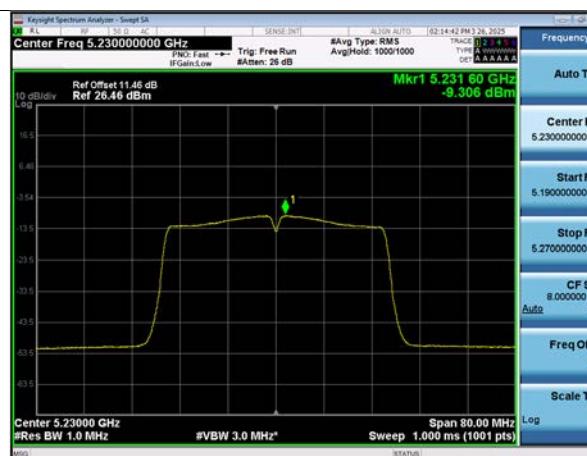


ANT2

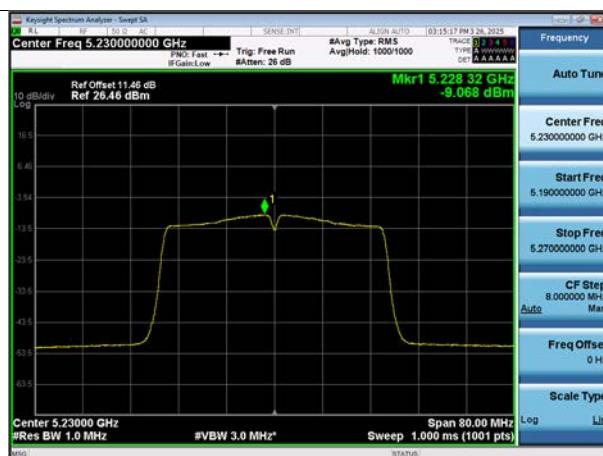

Bandwidth 80M, 802.11ac(VHT80) (Ch. 42)

ANT1

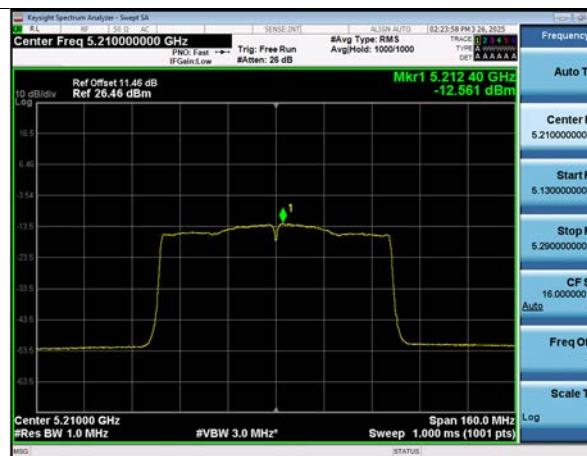

ANT2



10.6 FREQUENCY STABILITY

Note:

1. All modes of operation were investigated and the worst case configuration results are reported.
2. Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.6.1 80 MHz BW

REFERENCE VOLTAGE: 14.40 VDC

Startup after the EUT is energized

OPERATING BAND:			UNII Band 1		UNII Band 3	
OPERATING FREQUENCY:			5,210,000,000 Hz		5,775,000,000 Hz	
CHANNEL:			42		155	
Voltage	Power	Temp.	Frequency	Frequency Error	Frequency	Frequency Error
(%)	(VDC)	(°C)	(kHz)	(kHz)	(kHz)	(kHz)
100%	14.40	+20(Ref)	5210039.13	39.13	5775024.35	24.35
100%		-30	5210025.67	25.67	5775033.60	33.60
100%		-20	5210028.45	28.45	5775031.99	31.99
100%		-10	5210039.58	39.58	5775024.80	24.80
100%		0	5210040.05	40.05	5775040.77	40.77
100%		+10	5210041.40	41.40	5775048.36	48.36
100%		+30	5210046.68	46.68	5775045.96	45.96
100%		+40	5210046.58	46.58	5775058.59	58.59
100%		+50	5210064.04	64.04	5775069.60	69.60
High	16.00	+20	5210068.47	68.47	5775067.42	67.42
Low	9.00	+20	5210061.07	61.07	5775061.11	61.11

2 minutes after the EUT is energized

OPERATING BAND:			UNII Band 1		UNII Band 3	
OPERATING FREQUENCY:			5,210,000,000 Hz		5,775,000,000 Hz	
CHANNEL:			42		155	
Voltage	Power	Temp.	Frequency	Frequency Error	Frequency	Frequency Error
(%)	(VDC)	(°C)	(kHz)	(kHz)	(kHz)	(kHz)
100%	14.40	+20(Ref)	5210029.33	29.33	5775034.56	34.56
100%		-30	5210040.59	40.59	5775033.58	33.58
100%		-20	5210033.10	33.10	5775036.15	36.15
100%		-10	5210022.44	22.44	5775037.44	37.44
100%		0	5210027.51	27.51	5775034.46	34.46
100%		+10	5210042.14	42.14	5775041.78	41.78
100%		+30	5210048.04	48.04	5775040.88	40.88
100%		+40	5210040.44	40.44	5775040.51	40.51
100%		+50	5210060.58	60.58	5775068.11	68.11
High	16.00	+20	5210067.93	67.93	5775070.09	70.09
Low	9.00	+20	5210064.40	64.40	5775066.43	66.43

5 minutes after the EUT is energized

OPERATING BAND:			UNII Band 1		UNII Band 3	
OPERATING FREQUENCY:			5,210,000,000 Hz		5,775,000,000 Hz	
CHANNEL:			42		155	
Voltage	Power	Temp.	Frequency	Frequency Error	Frequency	Frequency Error
(%)	(VDC)	(°C)	(kHz)	(kHz)	(kHz)	(kHz)
100%	14.40	+20(Ref)	5210037.53	37.53	5775037.08	37.08
100%		-30	5210030.13	30.13	5775021.53	21.53
100%		-20	5210020.52	20.52	5775024.49	24.49
100%		-10	5210024.78	24.78	5775040.60	40.60
100%		0	5210036.08	36.08	5775023.96	23.96
100%		+10	5210043.38	43.38	5775050.20	50.20
100%		+30	5210059.67	59.67	5775056.74	56.74
100%		+40	5210051.06	51.06	5775059.07	59.07
100%		+50	5210070.88	70.88	5775063.00	63.00
High	16.00	+20	5210065.86	65.86	5775066.59	66.59
Low	9.00	+20	5210069.31	69.31	5775068.87	68.87

10 minutes after the EUT is energized

OPERATING BAND:			UNII Band 1		UNII Band 3	
OPERATING FREQUENCY:			5,210,000,000 Hz		5,775,000,000 Hz	
CHANNEL:			42		155	
Voltage	Power	Temp.	Frequency	Frequency Error	Frequency	Frequency Error
(%)	(VDC)	(°C)	(kHz)	(kHz)	(kHz)	(kHz)
100%	14.40	+20(Ref)	5210040.38	40.38	5775026.31	26.31
100%		-30	5210029.10	29.10	5775034.29	34.29
100%		-20	5210020.04	20.04	5775027.60	27.60
100%		-10	5210032.52	32.52	5775040.42	40.42
100%		0	5210024.21	24.21	5775034.38	34.38
100%		+10	5210046.65	46.65	5775040.41	40.41
100%		+30	5210048.01	48.01	5775048.96	48.96
100%		+40	5210057.50	57.50	5775049.43	49.43
100%		+50	5210062.46	62.46	5775065.03	65.03
High	16.00	+20	5210070.98	70.98	5775067.02	67.02
Low	9.00	+20	5210063.16	63.16	5775066.47	66.47

10.7 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	CL+AF+DF-AG	ANT. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured Value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	ANT. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

Frequency Range : Above 1 GHz

[SISO ANT1]

Band : UNII 1			Operation Mode : 802.11a				
CH.36 5180 MHz			Transfer Rate : 6 Mbps				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10360	49.12	5.79	V	54.91	68.20	13.29	PK
15540	48.57	6.58	V	55.15	73.98	18.83	PK
15540	34.16	6.58	V	40.74	53.98	13.24	AV
10360	49.35	5.79	H	55.14	68.20	13.06	PK
15540	48.68	6.58	H	55.26	73.98	18.72	PK
15540	34.54	6.58	H	41.12	53.98	12.86	AV

Band : UNII 1			Operation Mode : 802.11a				
CH.40 5200 MHz			Transfer Rate : 6 Mbps				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10400	49.10	5.60	V	54.70	68.20	13.50	PK
15600	46.98	6.35	V	53.33	73.98	20.65	PK
15600	34.53	6.35	V	40.88	53.98	13.10	AV
10400	49.19	5.60	H	54.79	68.20	13.41	PK
15600	48.61	6.35	H	54.96	73.98	19.02	PK
15600	34.60	6.35	H	40.95	53.98	13.03	AV

Band : UNII 1			Operation Mode : 802.11a				
CH.48 5240 MHz			Transfer Rate : 6 Mbps				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10480	49.25	6.05	V	55.30	68.20	12.90	PK
15720	48.16	5.76	V	53.92	73.98	20.06	PK
15720	34.51	5.76	V	40.27	53.98	13.71	AV
10480	49.43	6.05	H	55.48	68.20	12.72	PK
15720	49.02	5.76	H	54.78	73.98	19.20	PK
15720	34.87	5.76	H	40.63	53.98	13.35	AV

Band : UNII 3			Operation Mode : 802.11a				
CH.149 5745 MHz			Transfer Rate : 6 Mbps				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11490	48.14	5.88	V	54.02	73.98	19.96	PK
11490	34.66	5.88	V	40.54	53.98	13.44	AV
17235	47.53	10.22	V	57.75	68.20	10.45	PK
11490	48.37	5.88	H	54.25	73.98	19.73	PK
11490	34.84	5.88	H	40.72	53.98	13.26	AV
17235	47.75	10.22	H	57.97	68.20	10.23	PK

Band : UNII 3			Operation Mode : 802.11a				
CH.157 5785 MHz		Transfer Rate : 6 Mbps					
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11570	48.50	6.03	V	54.53	73.98	19.45	PK
11570	36.19	6.03	V	42.22	53.98	11.76	AV
17355	47.28	11.36	V	58.64	68.20	9.56	PK
11570	49.79	6.03	H	55.82	73.98	18.16	PK
11570	36.41	6.03	H	42.44	53.98	11.54	AV
17355	47.73	11.36	H	59.09	68.20	9.11	PK

Band : UNII 3			Operation Mode : 802.11a				
CH.161 5805 MHz		Transfer Rate : 6 Mbps					
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11610	48.13	5.42	V	53.55	73.98	20.43	PK
11610	35.55	5.42	V	40.97	53.98	13.01	AV
17415	47.06	11.65	V	58.71	68.20	9.49	PK
11610	48.88	5.42	H	54.30	73.98	19.68	PK
11610	35.85	5.42	H	41.27	53.98	12.71	AV
17415	47.33	11.65	H	58.98	68.20	9.22	PK

[SISO ANT2]

Band : UNII 1			Operation Mode : 802.11a				
CH.36 5180 MHz			Transfer Rate : 6 Mbps				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10360	49.15	5.79	V	54.94	68.20	13.26	PK
15540	47.86	6.58	V	54.44	73.98	19.54	PK
15540	34.08	6.58	V	40.66	53.98	13.32	AV
10360	49.67	5.79	H	55.46	68.20	12.74	PK
15540	48.07	6.58	H	54.65	73.98	19.33	PK
15540	34.32	6.58	H	40.90	53.98	13.08	AV

Band : UNII 1			Operation Mode : 802.11a				
CH.40 5200 MHz			Transfer Rate : 6 Mbps				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10400	49.22	5.60	V	54.82	68.20	13.38	PK
15600	48.25	6.35	V	54.60	73.98	19.38	PK
15600	34.18	6.35	V	40.53	53.98	13.45	AV
10400	49.58	5.60	H	55.18	68.20	13.02	PK
15600	48.44	6.35	H	54.79	73.98	19.19	PK
15600	34.46	6.35	H	40.81	53.98	13.17	AV

Band : UNII 1			Operation Mode : 802.11a				
CH.48 5240 MHz			Transfer Rate : 6 Mbps				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10480	49.33	6.05	V	55.38	68.20	12.82	PK
15720	48.25	5.76	V	54.01	73.98	19.97	PK
15720	34.28	5.76	V	40.04	53.98	13.94	AV
10480	49.51	6.05	H	55.56	68.20	12.64	PK
15720	48.60	5.76	H	54.36	73.98	19.62	PK
15720	34.74	5.76	H	40.50	53.98	13.48	AV

Band : UNII 3			Operation Mode : 802.11a				
CH.149 5745 MHz			Transfer Rate : 6 Mbps				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11490	47.81	5.88	V	53.69	73.98	20.29	PK
11490	35.13	5.88	V	41.01	53.98	12.97	AV
17235	47.77	10.22	V	57.99	68.20	10.21	PK
11490	49.04	5.88	H	54.92	73.98	19.06	PK
11490	35.35	5.88	H	41.23	53.98	12.75	AV
17235	48.14	10.22	H	58.36	68.20	9.84	PK

Band : UNII 3			Operation Mode : 802.11a				
CH.157 5785 MHz		Transfer Rate : 6 Mbps					
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11570	49.18	6.03	V	55.21	73.98	18.77	PK
11570	35.46	6.03	V	41.49	53.98	12.49	AV
17355	47.55	11.36	V	58.91	68.20	9.29	PK
11570	49.63	6.03	H	55.66	73.98	18.32	PK
11570	36.10	6.03	H	42.13	53.98	11.85	AV
17355	47.81	11.36	H	59.17	68.20	9.03	PK

Band : UNII 3			Operation Mode : 802.11a				
CH.161 5805 MHz		Transfer Rate : 6 Mbps					
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11610	49.50	5.42	V	54.92	73.98	19.06	PK
11610	34.76	5.42	V	40.18	53.98	13.80	AV
17415	47.22	11.65	V	58.87	68.20	9.33	PK
11610	49.81	5.42	H	55.23	73.98	18.75	PK
11610	36.03	5.42	H	41.45	53.98	12.53	AV
17415	47.37	11.65	H	59.02	68.20	9.18	PK

[MIMO]

Band : UNII 1			Operation Mode : 802.11n				
CH.36 5180 MHz			Transfer Rate : MCS 0				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10360	49.96	5.79	V	55.75	68.20	12.45	PK
15540	48.29	6.58	V	54.87	73.98	19.11	PK
15540	34.53	6.58	V	41.11	53.98	12.87	AV
10360	50.05	5.79	H	55.84	68.20	12.36	PK
15540	48.80	6.58	H	55.38	73.98	18.60	PK
15540	34.96	6.58	H	41.54	53.98	12.44	AV
Band : UNII 1			Operation Mode : 802.11n				
CH.40 5200 MHz			Transfer Rate : MCS 0				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10400	49.61	5.60	V	55.21	68.20	12.99	PK
15600	48.10	6.35	V	54.45	73.98	19.53	PK
15600	34.36	6.35	V	40.71	53.98	13.27	AV
10400	49.83	5.60	H	55.43	68.20	12.77	PK
15600	48.46	6.35	H	54.81	73.98	19.17	PK
15600	34.92	6.35	H	41.27	53.98	12.71	AV
Band : UNII 1			Operation Mode : 802.11n				
CH.48 5240 MHz			Transfer Rate : MCS 0				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10480	49.20	6.05	V	55.25	68.20	12.95	PK
15720	48.06	5.76	V	53.82	73.98	20.16	PK
15720	35.10	5.76	V	40.86	53.98	13.12	AV
10480	49.65	6.05	H	55.70	68.20	12.50	PK
15720	48.83	5.76	H	54.59	73.98	19.39	PK
15720	35.17	5.76	H	40.93	53.98	13.05	AV
Band : UNII 3			Operation Mode : 802.11n				
CH.149 5745 MHz			Transfer Rate : MCS 0				
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11490	49.37	5.88	V	55.25	73.98	18.73	PK
11490	35.19	5.88	V	41.07	53.98	12.91	AV
17235	48.22	10.22	V	58.44	68.20	9.76	PK
11490	49.74	5.88	H	55.62	73.98	18.36	PK
11490	35.44	5.88	H	41.32	53.98	12.66	AV
17235	48.58	10.22	H	58.80	68.20	9.40	PK

Band : UNII 3			Operation Mode : 802.11n				
CH.157 5785 MHz		Transfer Rate : MCS 0					
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11570	49.58	6.03	V	55.61	73.98	18.37	PK
11570	36.61	6.03	V	42.64	53.98	11.34	AV
17355	47.53	11.36	V	58.89	68.20	9.31	PK
11570	49.76	6.03	H	55.79	73.98	18.19	PK
11570	36.73	6.03	H	42.76	53.98	11.22	AV
17355	47.84	11.36	H	59.20	68.20	9.00	PK

Band : UNII 3			Operation Mode : 802.11n				
CH.161 5805 MHz		Transfer Rate : MCS 0					
Frequency [MHz]	Measured value [dB μ V]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11610	49.26	5.42	V	54.68	73.98	19.30	PK
11610	36.16	5.42	V	41.58	53.98	12.40	AV
17415	47.14	11.65	V	58.79	68.20	9.41	PK
11610	49.95	5.42	H	55.37	73.98	18.61	PK
11610	36.28	5.42	H	41.70	53.98	12.28	AV
17415	47.61	11.65	H	59.26	68.20	8.94	PK

[Simultaneous transmission Scenario]**Scenario 2**

Bluetooth DH5_Ch.78 + WLAN 5 GHz MIMO 802.11n20_Ch. 161

Frequency	Measured value	CL+AF+DF-AG	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
11610	50.09	5.42	V	55.51	73.98	18.47	PK
11610	35.97	5.42	V	41.39	53.98	12.59	AV
17415	48.81	11.65	V	60.46	68.20	7.74	PK
11610	50.50	5.42	H	55.92	73.98	18.06	PK
11610	36.12	5.42	H	41.54	53.98	12.44	AV
17415	49.03	11.65	H	60.68	68.20	7.52	PK

Scenario 4


BTLE_Ch.39, 1 M Bit/s (255 Bytes) + WLAN 5 GHz MIMO 802.11n20_Ch. 161

Frequency	Measured value	CL+AF+DF-AG	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
11610	48.69	5.42	V	54.11	73.98	19.87	PK
11610	34.57	5.42	V	39.99	53.98	13.99	AV
17415	47.06	11.65	V	58.71	68.20	9.49	PK
11610	48.81	5.42	H	54.23	73.98	19.75	PK
11610	34.65	5.42	H	40.07	53.98	13.91	AV
17415	47.35	11.65	H	59.00	68.20	9.20	PK

Test Plots [MIMO]


Note: Only the worst case plots for Radiated Spurious Emissions.

Radiated Spurious Emissions plot – Peak Result (802.11n20, Ch.161 Spurious Emissions, X-H)

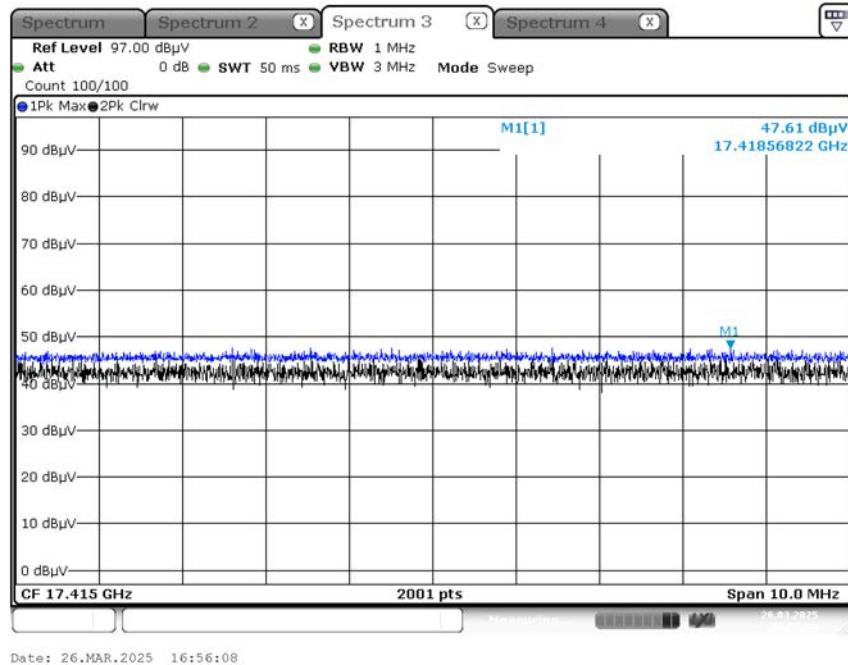**[Simultaneous transmission Scenario]**Scenario 2

Bluetooth DH5_Ch.78 + WLAN 5 GHz MIMO 802.11n20_Ch. 161


Radiated Spurious Emissions plot – Peak Result (3rd, Spurious Emissions, X-H)

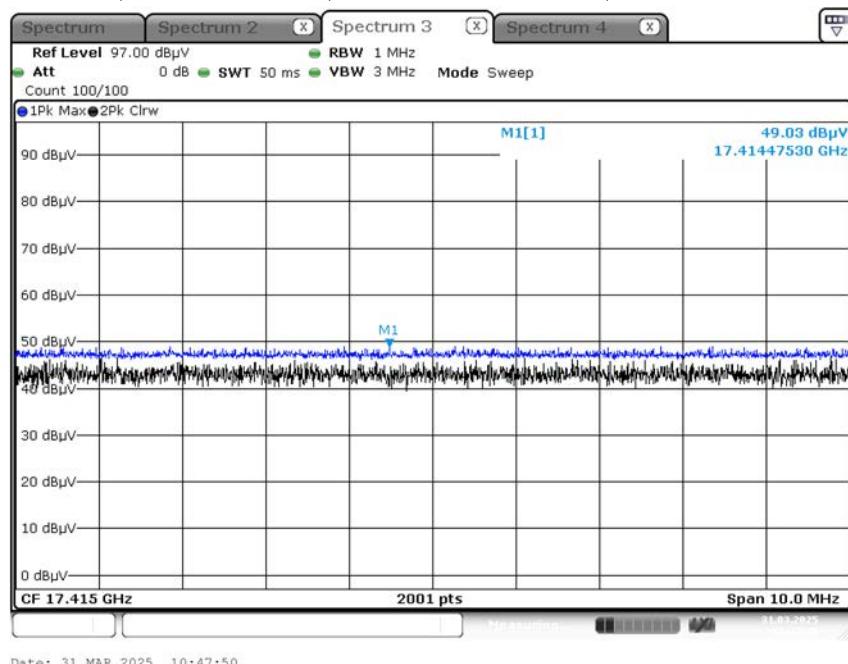

Scenario 4

BTLE_Ch.39, 1 M Bit/s (255 Bytes) + WLAN 5 GHz MIMO 802.11n20_Ch. 161

Radiated Spurious Emissions plot – Peak Result (3rd, Spurious Emissions, X-H)

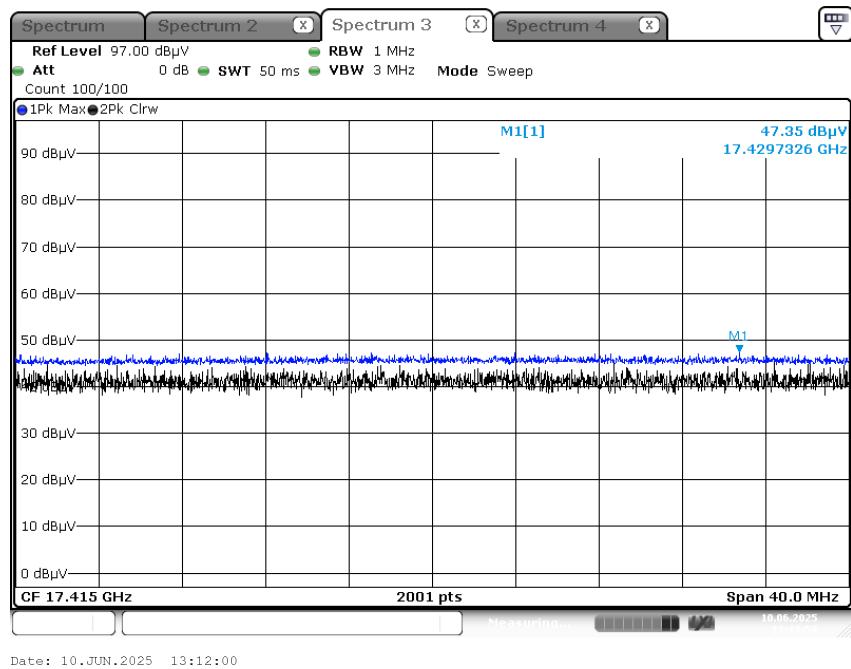

10.8 RADIATED RESTRICTED BAND EDGE

[SISO ANT1]

802.11 a		Transfer Rate: 6 Mbps					
Channel	Ch.36	5180 MHz	UNII 1				Measurement Type
Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
5150	59.89	-	H	59.89	73.98	14.09	PK
5150	47.13	-	H	47.13	53.98	6.85	AV

802.11 a		Transfer Rate: 6 Mbps					
Channel	Ch. 48	5240 MHz	UNII 1				Measurement Type
Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
5350	58.09	-	H	58.09	73.98	15.89	PK
5350	45.21	-	H	45.21	53.98	8.77	AV

802.11 n_HT20		Transfer MCS Index: MCS 0					
Channel	Ch. 36	5180 MHz	UNII 1				Measurement Type
Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
5150	60.29	-	H	60.29	73.98	13.69	PK
5150	47.53	-	H	47.53	53.98	6.45	AV

802.11 n_HT20		Transfer MCS Index: MCS 0					
Channel	Ch. 48	5240 MHz	UNII 1				Measurement Type
Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
5350	58.55	-	H	58.55	73.98	15.43	PK
5350	45.26	-	H	45.26	53.98	8.72	AV

802.11 ac_VHT20		Transfer MCS Index: MCS 0					
Channel	Ch. 36	5180 MHz	UNII 1				Measurement Type
Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
5150	59.84	-	H	59.84	73.98	14.14	PK
5150	47.41	-	H	47.41	53.98	6.57	AV

802.11 ac_VHT20		Transfer MCS Index: MCS 0					
Channel	Ch. 48	5240 MHz	UNII 1				Measurement Type
Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
5350	58.18	-	H	58.18	73.98	15.80	PK
5350	45.18	-	H	45.18	53.98	8.80	AV

802.11 n_HT40			Transfer MCS Index: MCS 0				
Channel	Ch. 38	5190 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5150	59.69	-	H	59.69	73.98	14.29	PK
5150	47.90	-	H	47.90	53.98	6.08	AV

802.11 n_HT40			Transfer MCS Index: MCS 0				
Channel	Ch. 46	5230 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5350	58.97	-	H	58.97	73.98	15.01	PK
5350	45.52	-	H	45.52	53.98	8.46	AV

802.11 ac_VHT40			Transfer MCS Index: MCS 0				
Channel	Ch. 38	5190 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5150	60.30	-	H	60.30	73.98	13.68	PK
5150	48.04	-	H	48.04	53.98	5.94	AV

802.11 ac_VHT40			Transfer MCS Index: MCS 0				
Channel	Ch. 46	5230 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5350	58.89	-	H	58.89	73.98	15.09	PK
5350	45.61	-	H	45.61	53.98	8.37	AV

802.11 ac_VHT80			Transfer MCS Index: MCS 0				
Channel	Ch. 42	5210 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5150	61.18	-	H	61.18	73.98	12.80	PK
5150	49.08	-	H	49.08	53.98	4.90	AV

802.11 ac_VHT80			Transfer MCS Index: MCS 0				
Channel	Ch. 42	5210 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5350	58.83	-	H	58.83	73.98	15.15	PK
5350	47.30	-	H	47.30	53.98	6.68	AV

[SISO ANT2]

802.11 a		Transfer Rate: 6 Mbps					
Channel	Ch.36	5180 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5150	58.62	-	H	58.62	73.98	15.36	PK
5150	45.94	-	H	45.94	53.98	8.04	AV

802.11 a		Transfer Rate: 6 Mbps					
Channel	Ch. 48	5240 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5350	58.34	-	H	58.34	73.98	15.64	PK
5350	45.45	-	H	45.45	53.98	8.53	AV

802.11 n_HT20		Transfer MCS Index: MCS 0					
Channel	Ch. 36	5180 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5150	58.49	-	H	58.49	73.98	15.49	PK
5150	45.98	-	H	45.98	53.98	8.00	AV

802.11 n_HT20		Transfer MCS Index: MCS 0					
Channel	Ch. 48	5240 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5350	57.73	-	H	57.73	73.98	16.25	PK
5350	45.08	-	H	45.08	53.98	8.90	AV

802.11 ac_VHT20		Transfer MCS Index: MCS 0					
Channel	Ch. 36	5180 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5150	58.45	-	H	58.45	73.98	15.53	PK
5150	46.08	-	H	46.08	53.98	7.90	AV

802.11 ac_VHT20		Transfer MCS Index: MCS 0					
Channel	Ch. 48	5240 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5350	59.01	-	H	59.01	73.98	14.97	PK
5350	45.06	-	H	45.06	53.98	8.92	AV

802.11 n_HT40			Transfer MCS Index: MCS 0				
Channel	Ch. 38	5190 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5150	58.41	-	H	58.41	73.98	15.57	PK
5150	46.56	-	H	46.56	53.98	7.42	AV

802.11 n_HT40			Transfer MCS Index: MCS 0				
Channel	Ch. 46	5230 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5350	57.82	-	H	57.82	73.98	16.16	PK
5350	45.49	-	H	45.49	53.98	8.49	AV

802.11 ac_VHT40			Transfer MCS Index: MCS 0				
Channel	Ch. 38	5190 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5150	58.38	-	H	58.38	73.98	15.60	PK
5150	46.26	-	H	46.26	53.98	7.72	AV

802.11 ac_VHT40			Transfer MCS Index: MCS 0				
Channel	Ch. 46	5230 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5350	57.42	-	H	57.42	73.98	16.56	PK
5350	45.39	-	H	45.39	53.98	8.59	AV

802.11 ac_VHT80			Transfer MCS Index: MCS 0				
Channel	Ch. 42	5210 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5150	58.73	-	H	58.73	73.98	15.25	PK
5150	47.71	-	H	47.71	53.98	6.27	AV

802.11 ac_VHT80			Transfer MCS Index: MCS 0				
Channel	Ch. 42	5210 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5350	58.12	-	H	58.12	73.98	15.86	PK
5350	46.22	-	H	46.22	53.98	7.76	AV

[MIMO]

802.11 n_HT20		Transfer MCS Index: MCS 0					
Channel	Ch. 36	5180 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5150	59.83	-	H	59.83	73.98	14.15	PK
5150	47.54	-	H	47.54	53.98	6.44	AV
802.11 n_HT20		Transfer MCS Index: MCS 0					
Channel	Ch. 48	5240 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5350	58.04	-	H	58.04	73.98	15.94	PK
5350	45.21	-	H	45.21	53.98	8.77	AV
802.11 ac_VHT20		Transfer MCS Index: MCS 0					
Channel	Ch. 36	5180 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5150	58.94	-	H	58.94	73.98	15.04	PK
5150	47.04	-	H	47.04	53.98	6.94	AV
802.11 ac_VHT20		Transfer MCS Index: MCS 0					
Channel	Ch. 48	5240 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5350	58.11	-	H	58.11	73.98	15.87	PK
5350	45.02	-	H	45.02	53.98	8.96	AV
802.11 n_HT40		Transfer MCS Index: MCS 0					
Channel	Ch. 38	5190 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5150	59.69	-	H	59.69	73.98	14.29	PK
5150	46.99	-	H	46.99	53.98	6.99	AV
802.11 n_HT40		Transfer MCS Index: MCS 0					
Channel	Ch. 46	5230 MHz	UNII 1				
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	Type
5350	58.53	-	H	58.53	73.98	15.45	PK
5350	45.37	-	H	45.37	53.98	8.61	AV

802.11 ac_VHT40			Transfer MCS Index: MCS 0				
Channel	Ch. 38	5190 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5150	59.84	-	H	59.84	73.98	14.14	PK
5150	47.15	-	H	47.15	53.98	6.83	AV

802.11 ac_VHT40			Transfer MCS Index: MCS 0				
Channel	Ch. 46	5230 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5350	58.66	-	H	58.66	73.98	15.32	PK
5350	45.45	-	H	45.45	53.98	8.53	AV

802.11 ac_VHT80			Transfer MCS Index: MCS 0				
Channel	Ch. 42	5210 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5150	61.73	-	H	61.73	73.98	12.25	PK
5150	49.09	-	H	49.09	53.98	4.89	AV


802.11 ac_VHT80			Transfer MCS Index: MCS 0				
Channel	Ch. 42	5210 MHz	UNII 1				Measurement Type
Frequency	Measured Value	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
5350	58.72	-	H	58.72	73.98	15.26	PK
5350	47.48	-	H	47.48	53.98	6.50	AV

Test Plots (UNII 1)

Note: Only the worst case plots for Radiated Restricted Band Edge.


[MIMO]

Average Result (802.11 ac_VHT80_ MCS0, Ch.42, X-H)






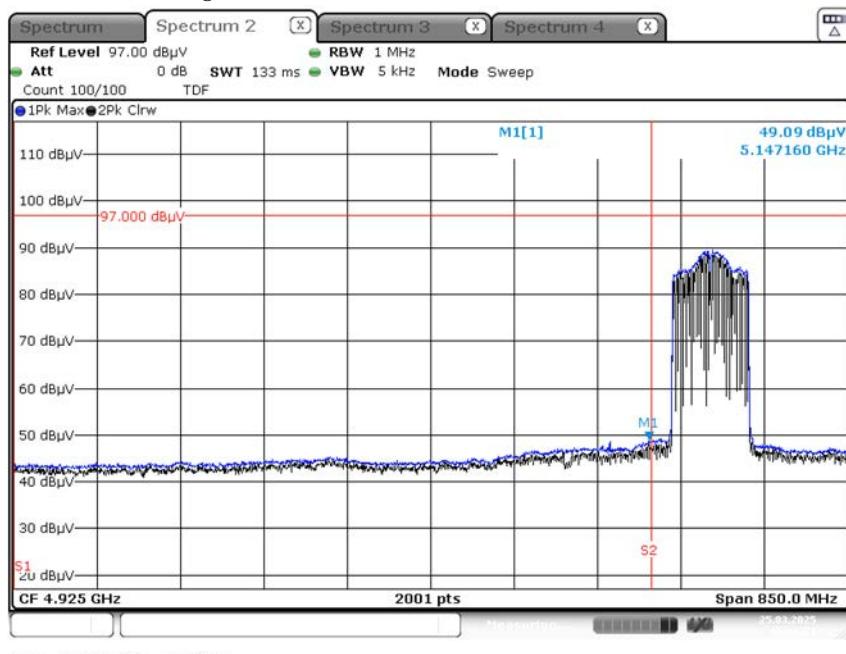


Date: 25.MAR.2025 16:24:51


Peak Result (802.11 ac_VHT80_ MCS0, Ch.42, X-H)

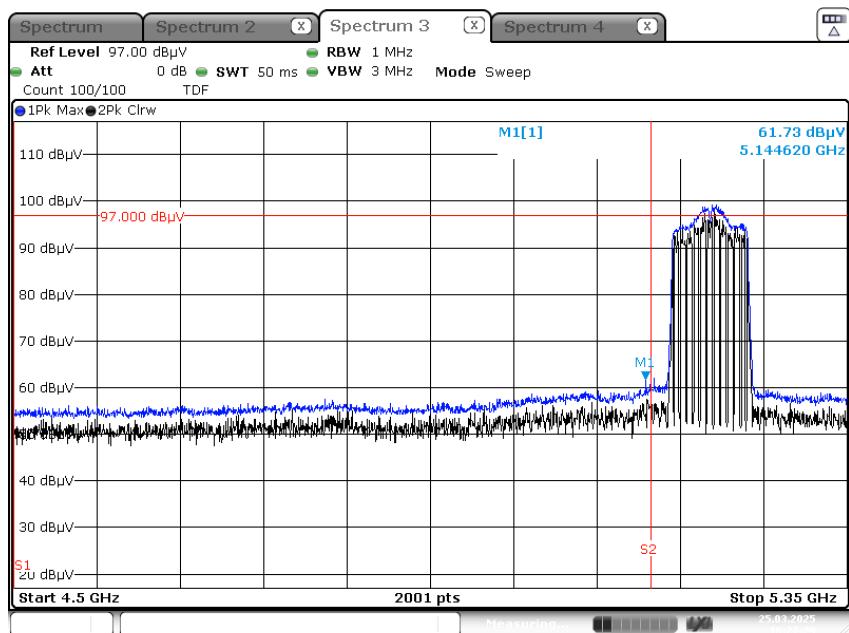

Date: 25.MAR.2025 16:27:29

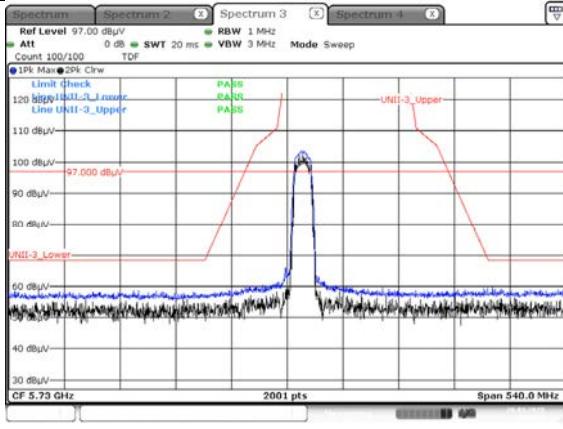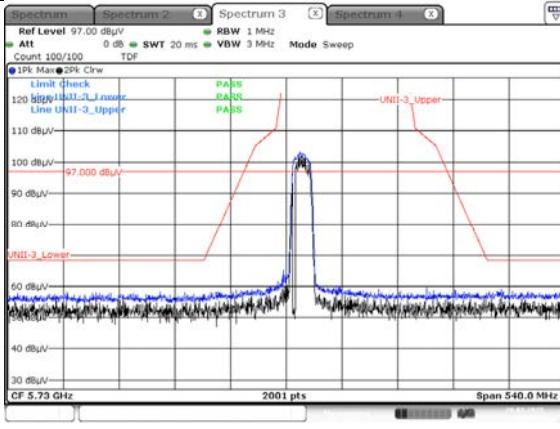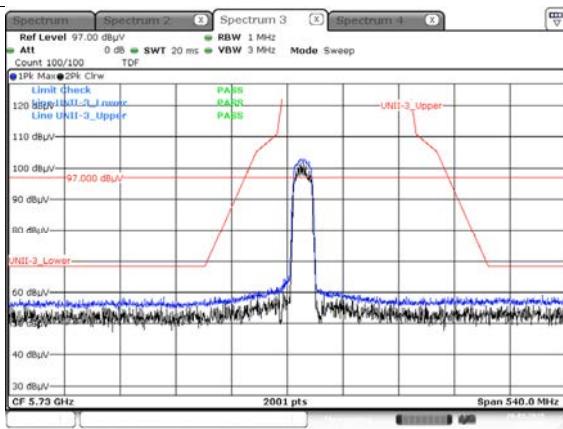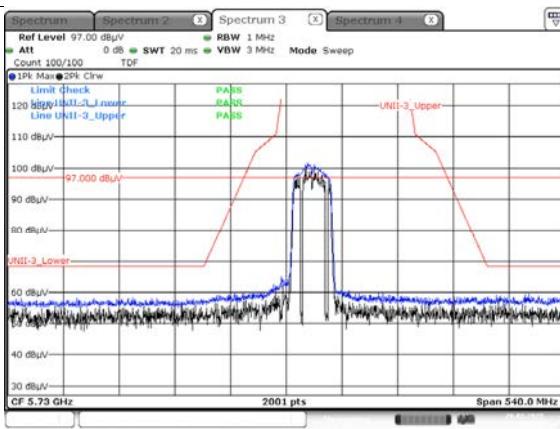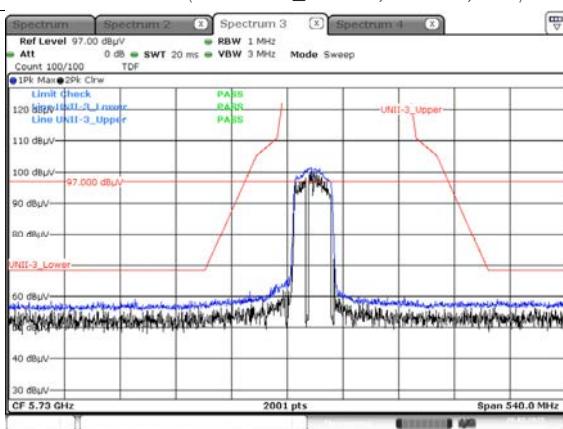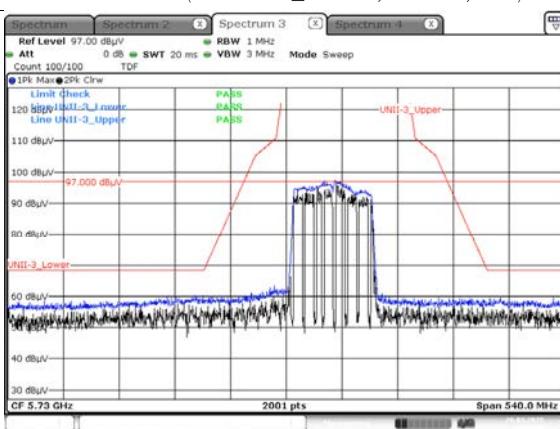
Test Plots (UNII 3)
[SISO ANT1]
Peak Result (802.11a, Ch.149, X-H)

Peak Result (802.11n_HT20, Ch.149, X-H)

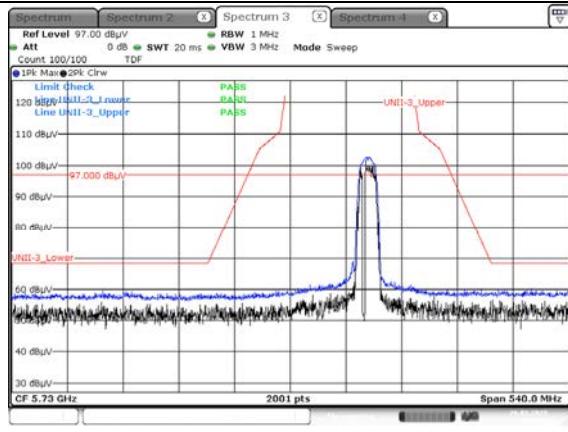Peak Result (802.11ac_VHT20, Ch.149, X-H)

Peak Result (802.11n_HT40, Ch.151, X-H)

Peak Result (802.11ac_VHT40, Ch.151, X-H)

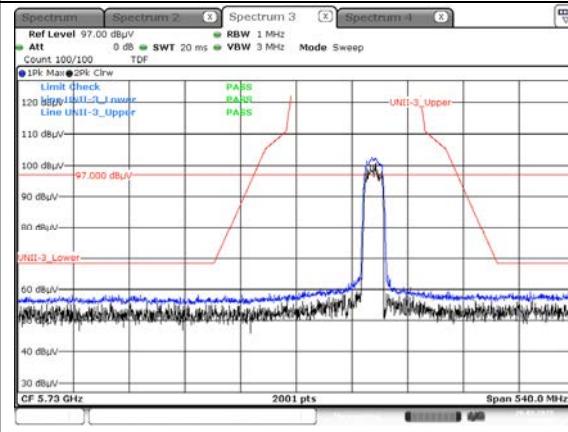Peak Result (802.11ac_VHT80, Ch.155, X-H)


Peak Result (802.11a, Ch.161, X-H)




Date: 26.MAR.2025 14:53:21

Peak Result (802.11n_HT20, Ch.161, X-H)




Date: 26.MAR.2025 14:54:18

Peak Result (802.11ac_VHT20, Ch.161, X-H)

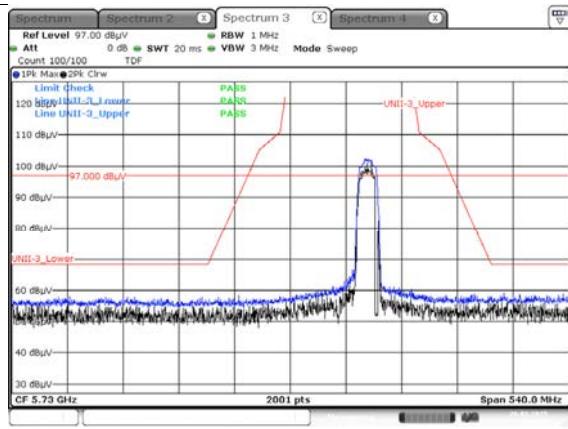


Date: 26.MAR.2025 14:54:55

Peak Result (802.11n_HT40, Ch.159, X-H)

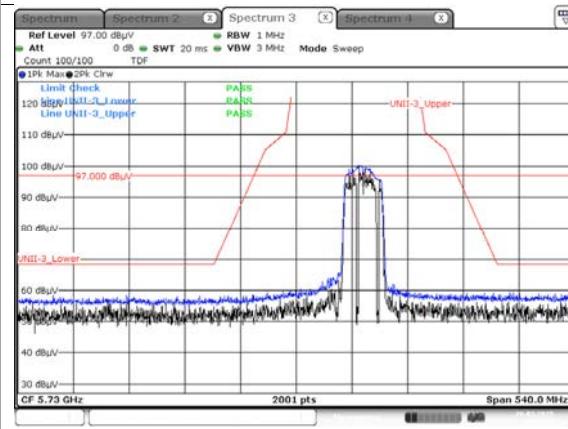


Date: 26.MAR.2025 15:17:48

Peak Result (802.11ac_VHT40, Ch.159, X-H)






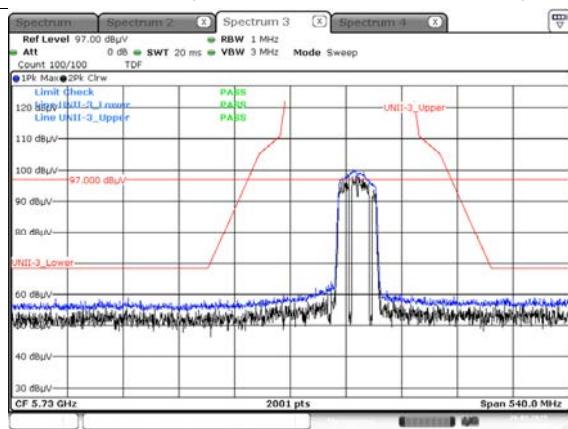


Date: 26.MAR.2025 15:18:50


Peak Result (802.11ac_VHT80, Ch.155, X-H)

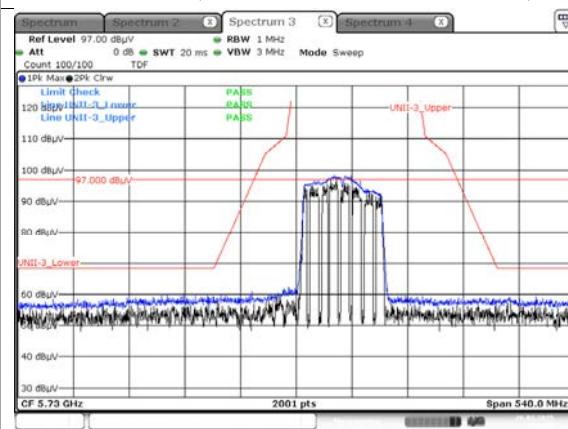

Date: 26.MAR.2025 14:13:55

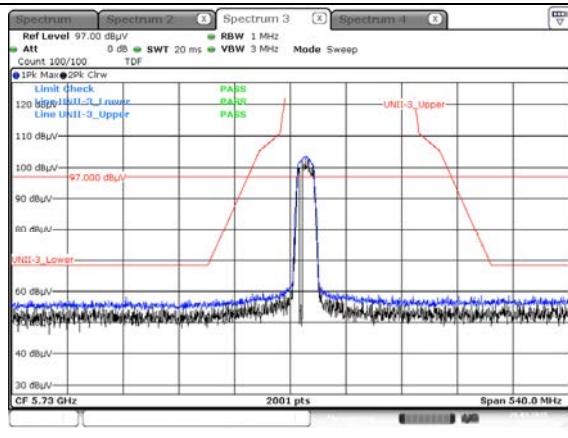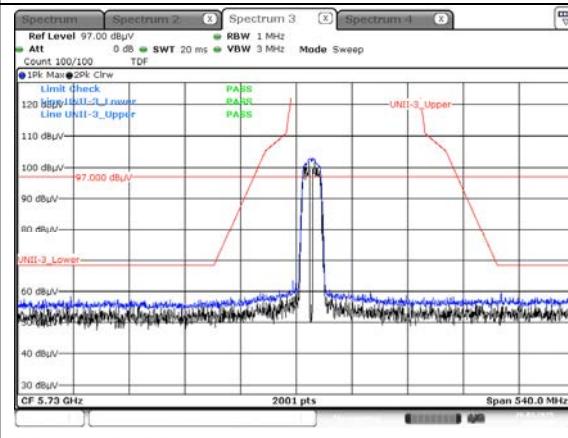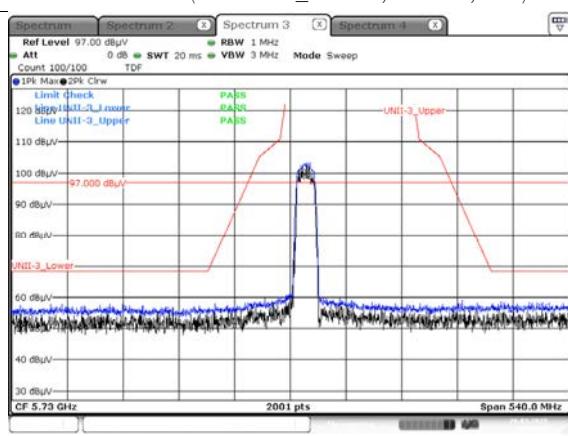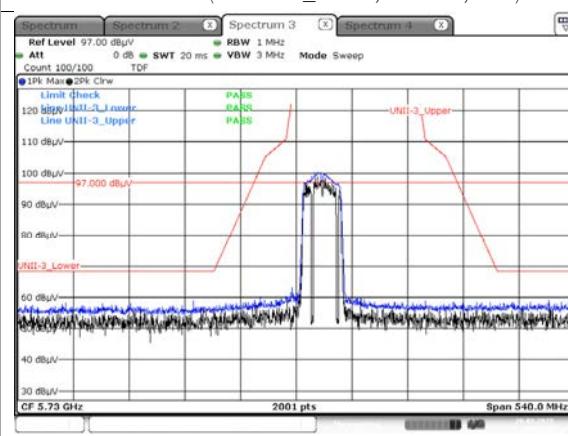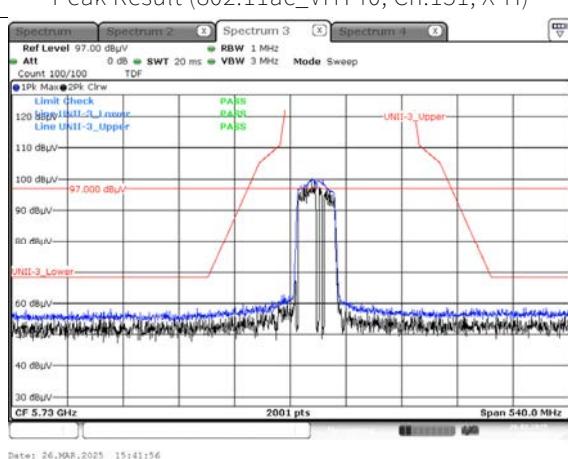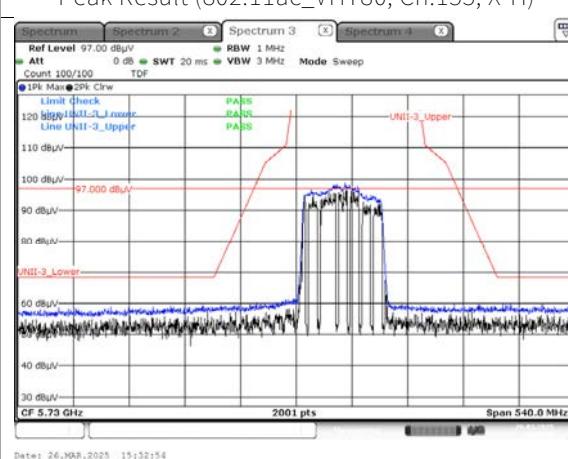
[SISO ANT2]
Peak Result (802.11a, Ch.149, X-H)

Peak Result (802.11n_HT20, Ch.149, X-H)

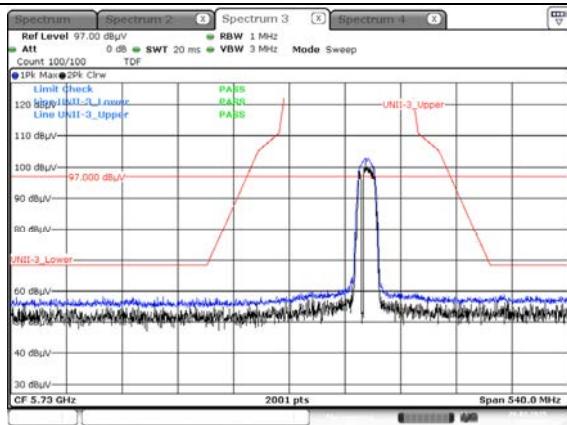Peak Result (802.11ac_VHT20, Ch.149, X-H)

Peak Result (802.11n_HT40, Ch.151, X-H)

Peak Result (802.11ac_VHT40, Ch.151, X-H)

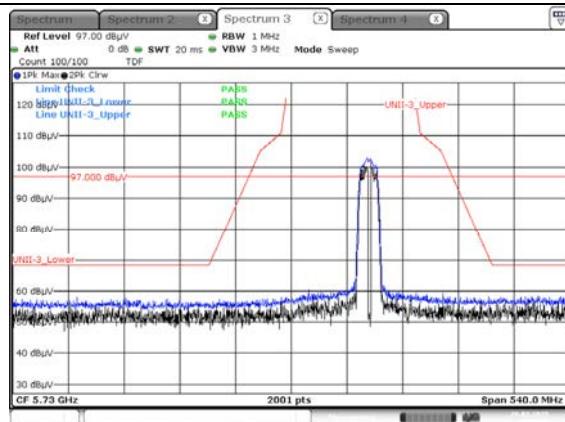Peak Result (802.11ac_VHT80, Ch.155, X-H)


Peak Result (802.11a, Ch.161, X-H)




Date: 26.MAR.2025 15:53:22

Peak Result (802.11n_HT20, Ch.161, X-H)




Date: 26.MAR.2025 15:53:56

Peak Result (802.11ac_VHT20, Ch.161, X-H)

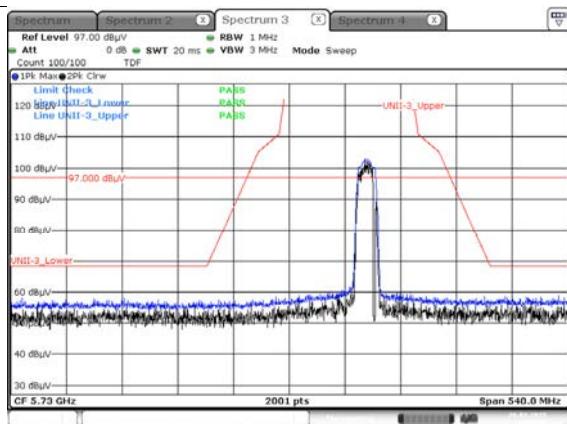


Date: 26.MAR.2025 15:54:30

Peak Result (802.11n_HT40, Ch.159, X-H)

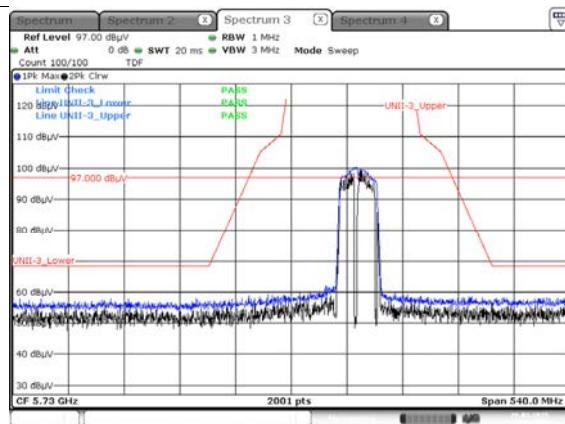


Date: 26.MAR.2025 16:02:14

Peak Result (802.11ac_VHT40, Ch.159, X-H)





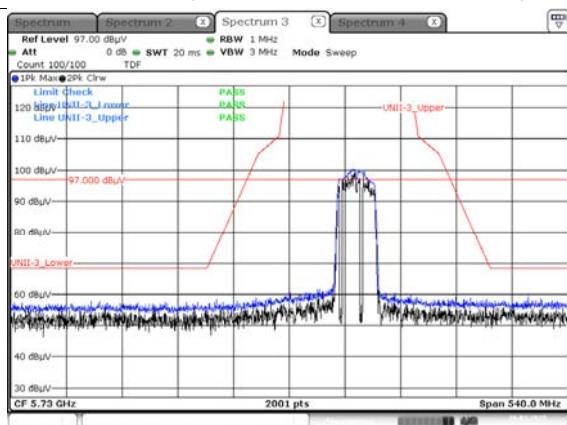


Date: 26.MAR.2025 16:03:04


Peak Result (802.11ac_VHT80, Ch.155, X-H)

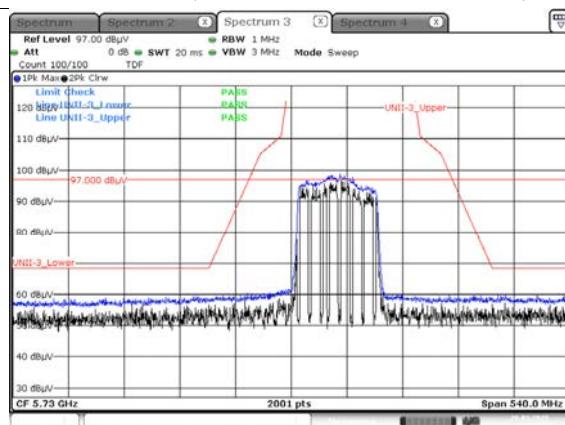

Date: 26.MAR.2025 15:53:34

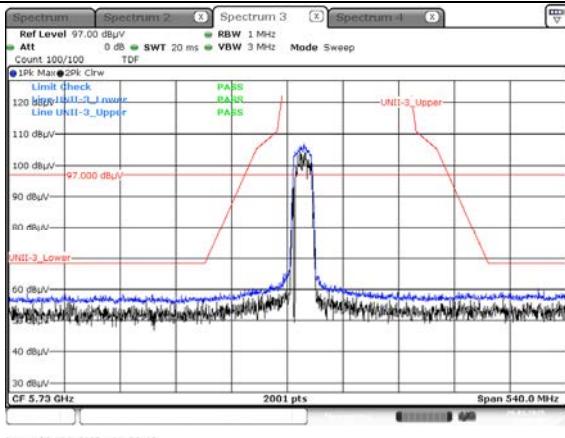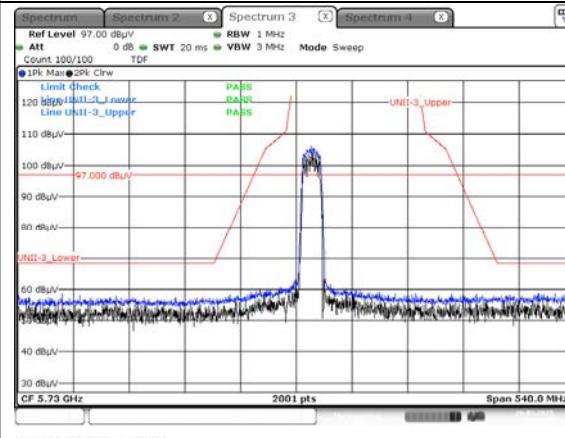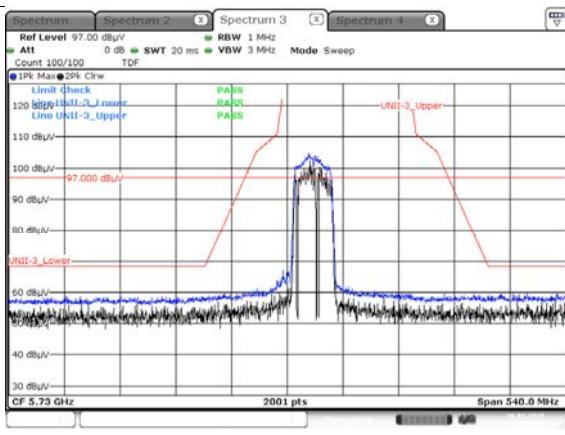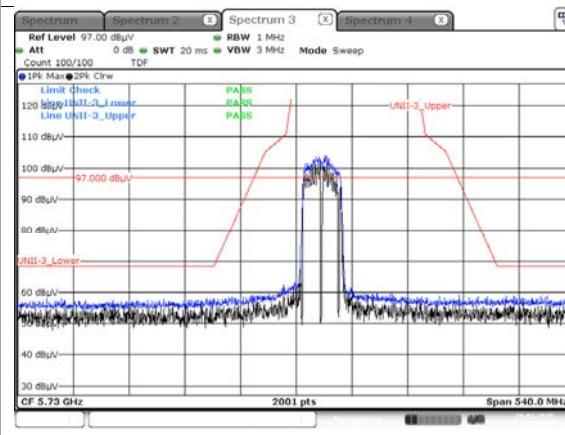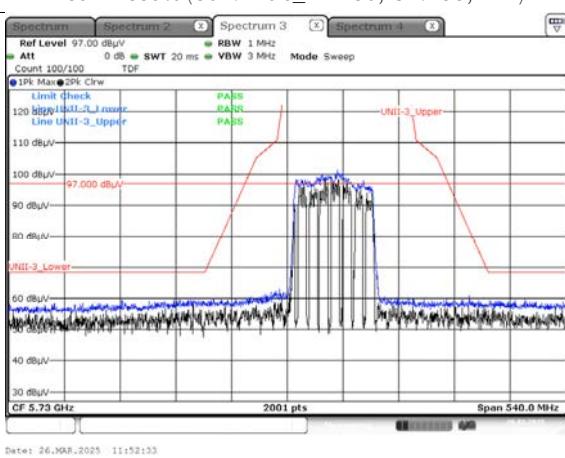
[MIMO]
Peak Result (802.11n_HT20, Ch.149, X-H)

Peak Result (802.11ac_VHT20, Ch.149, X-H)

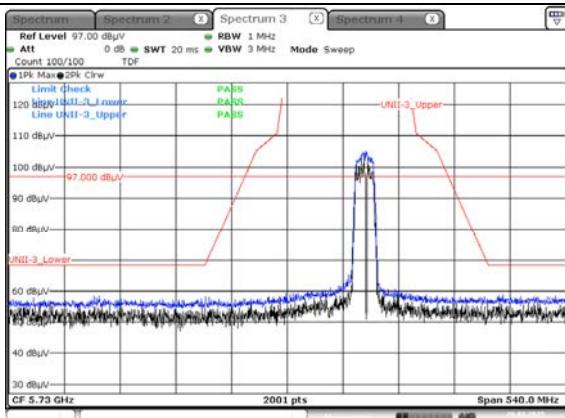Peak Result (802.11n_HT40, Ch.151, X-H)

Peak Result (802.11ac_VHT40, Ch.151, X-H)

Peak Result (802.11ac_VHT80, Ch.155, X-H)

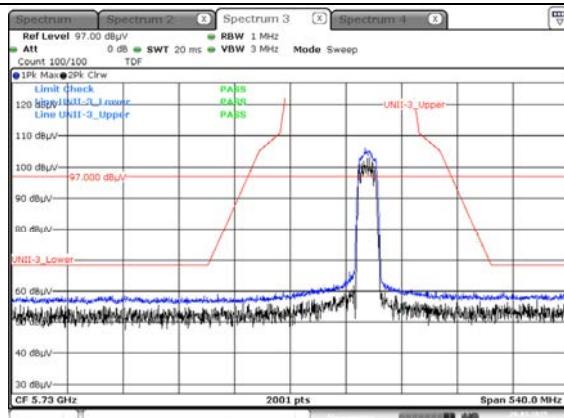
Peak Result (802.11n_HT20, Ch.161, X-H)




Date: 26.MAR.2025 11:59:45

Peak Result (802.11ac_VHT20, Ch.161, X-H)




Date: 26.MAR.2025 13:17:53

Peak Result (802.11n_HT40, Ch.159, X-H)

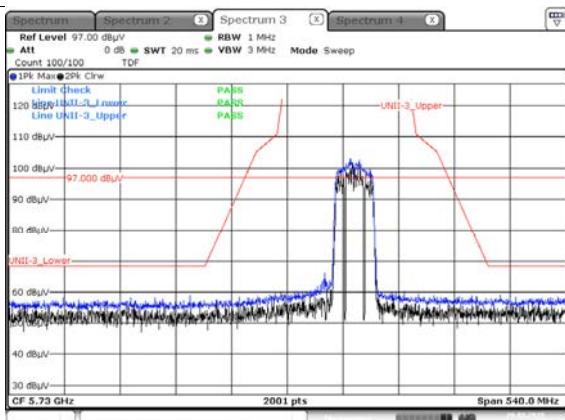


Date: 26.MAR.2025 13:18:29

Peak Result (802.11ac_VHT40, Ch.159, X-H)

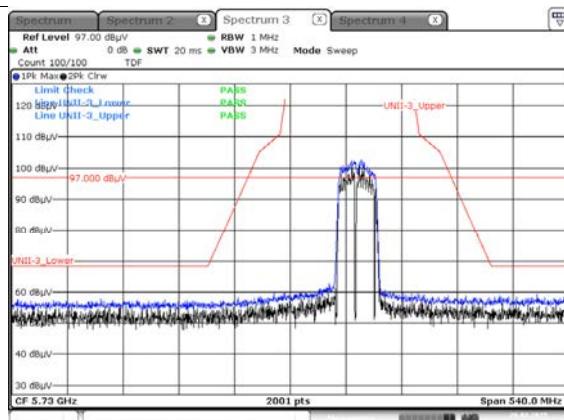

Date: 26.MAR.2025 13:19:27

Peak Result (802.11ac_VHT80, Ch.155, X-H)

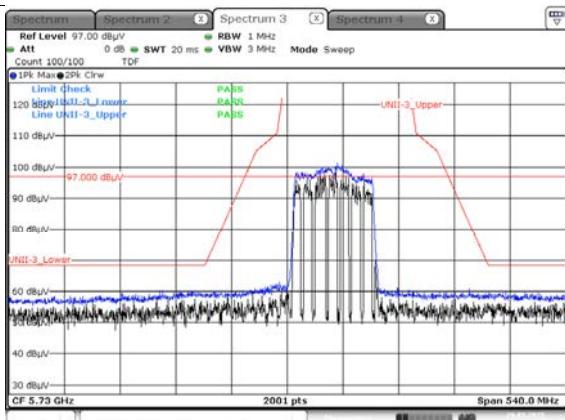

Date: 26.MAR.2025 11:52:53

Note:

- Only the worst case plots for U-NII-3 Out of Band e.i.r.p Emission.
- U-NII-3 Low & High Band Edge RedLine is Final Test Limit about factor value compensation.

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	07/17/2025	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	07/02/2025	Annual
Temperature Chamber	SU-642	ESPEC	93022487	06/27/2025	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	08/23/2025	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	100935	08/01/2025	Annual
Power Meter	N1911A	Agilent	MY45100523	02/21/2026	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/04/2026	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/21/2025	Annual
Power Splitter	11667B	Hewlett Packard	10545	01/23/2026	Annual
DC Power Supply	E3632A	Agilent	KR75305528	12/24/2025	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	05/28/2025	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/18/2026	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100752	12/27/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S3AM	07/30/2025	Annual
Turn Table	DS1500-S-1t	Innco system	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/07/2026	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/28/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/07/2025	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	12/26/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	05/27/2026	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	05/27/2026	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	01/09/2026	Annual
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
RF Switching System	FBSR-03A (3G HPF+LNA)	T&M SYSTEM	S3L1	10/31/2025	Annual
RF Switching System	FBSR-03A (10dB ATT+LNA)	T&M SYSTEM	S3L2	10/31/2025	Annual
RF Switching System	FBSR-03A (7G HPF+LNA)	T&M SYSTEM	S3L3	10/31/2025	Annual
RF Switching System	FBSR-03A (3dB ATT+LNA)	T&M SYSTEM	S3L4	10/31/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/19/2026	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/12/2026	Annual
Spectrum Analyzer	FSV40 (9 kHz ~ 40 GHz)	Rohde & Schwarz	100900	08/27/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2505-FC073-P