

HCT CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8525

**CERTIFICATE OF COMPLIANCE
FCC PART 15.231 Certification****Applicant Name:**

HYUNDAI MOBIS CO., LTD.

Address:Cartronics R&D Center, 80-9 Mabook-Ri,
Gyunggi-Do 449-910 South Korea**Date of Issue:**

April 30, 2010

Test Site/Location:HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,
Kyungki-do, Korea**Test Report No.:** HCTR1004FR22-1**HCT FRN:** 0005866421**HYUNDAI MOBIS FRN:** 0014195663

FCC ID	: TQ8HM-T034
IC	: 5074A-HMT034
APPLICANT	: HYUNDAI MOBIS CO., LTD.

FCC Model(s): HM-T034**IC Model(s):** HM-T034**EUT Type:** Remote Keyless Entry**Tx Frequency:** 315.00 MHz (Tx)**Type of Modulation:** FSK**Equipment Class:** DSC - Part 15 Security / Remote Control Transmitter**IC Equipment Category:** RSS-210 Issue 7: Category I Equipment, annex 1**FCC Rule Part(s)** Part 15 subpart C 15.231**IC Rule:** RSS-210 Issue 7**IC Registration No. :** 5944A-1

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)


Report prepared by**: Jong Seok Lee****Test engineer of RF Team**
Approved by**: Sang Jun Lee****Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID:	IC:	Page 1 of 16
HCTR1004FR22-1	April 30, 2010	Remote Keyless Entry	TQ8HM-T034	5074A-HMT034	



Table of Contents

1. GENERAL INFORMATION	3
2. EUT DESCRIPTION	3
3. TEST METHODOLOGY	4
3.1 EUT CONFIGURATION	4
3.2 EUT EXERCISE	4
3.3 GENERAL TEST PROCEDURES	4
3.4 DESCRIPTION OF TEST MODES	4
4. INSTRUMENT CALIBRATION	5
5. FACILITIES AND ACCREDITATIONS	5
5.1 FACILITIES	5
5.2 EQUIPMENT	5
6. ANTENNA REQUIREMENTS	5
7. LIMITS AND TEST RESULT	6
7.1 20dB BANDWIDTH	7
7.2 LESS THAN 5 SECOND PLOT	9
7.3 RADIATED EMISSIONS	11
7.3.1 TRANSMITTER RADIATED SPURIOUS EMISSIONS	11
7.3.2 TEST RESULTS	14
7.3.3 FIELD STRENGTH CALCULATION	14
8. LIST OF TEST EQUIPMENT	14

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 2 of 16



1. GENERAL INFORMATION

Applicant: HYUNDAI MOBIS CO., LTD.

Address: Cartronics R&D Center, 80-9 Mabook-Ri,
Gyunggi-Do 449-910 South Korea

FCC ID: TQ8HM-T034

IC : 5074A-HMT034

EUT: Remote Keyless Entry

Model: FCC: HM-T034
IC: HM-T034

Date of Test: April 12, 2010

Contact person: Name: Yong-Bin KIM
Phone #: + 82 – 31 – 586 – 8899

Place of Tests: HCT Co., Ltd.
Icheon, Gyunggi-Do, South Korea (IC Recognition No. : IC 5944A-1)

2. EUT DESCRIPTION

Type	Remote Keyless Entry
Model Name	HM-T034
Power Source	DC 3 V (Lithium Battery)
Tx Frequency	315.00 MHz (Tx)
Type of Modulation	FSK
Antenna	Antenna type : PCB Pattern Antenna

HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 3 of 16



3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled "Filing and Measurement Guidelines for Transmitter for Remote Keyless Entry System" were used in the measurement of the **HYUNDAI MOBIS CO., LTD. Remote Keyless Entry FCC ID: TQ8HM-T034**

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.205, 15.207, 15.209 and 15.231 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under engineering test mode condition and the EUT staying in continuous transmitting mode.

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 4 of 16



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Gyunggi-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009(Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 5 of 16



7. LIMITS AND TEST RESULT

Summary of Test Results

Report Section	FCC Part Section(s)	RSS-210 Section	Test Description	Test Result
TRANSMITTER MODE (TX)				
7.2	15.231(a)	A1.1.1(a)	LESS THAN 5 SECOND PLOT	PASS
7.3	15.231(b)	A1.1.2(1)	RADIATED EMISSIONS	PASS
7.1	15.231(c)	A1.1.3	20dB BANDWIDTH	PASS

HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 6 of 16



7.1 20dB BANDWIDTH

LIMIT

§15.231 (c) & IC RSS-210 Issue 6 A1.1.3

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth The RBW is set to 100kHz. The VBW is set to 100kHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

RESULTS


NO non-compliance noted.

Operating Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
315	105	787.5	682.5

HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 7 of 16

20dB BANDWIDTH

□ RESULT PLOTS

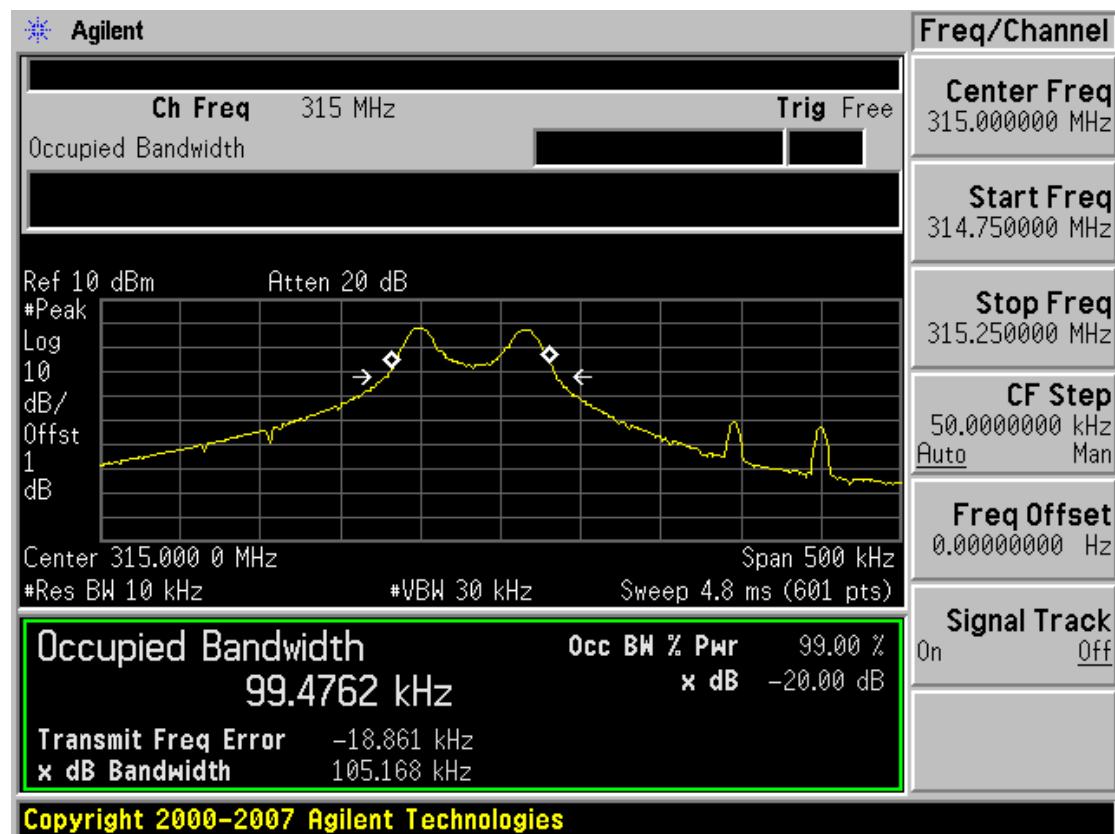

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 8 of 16



7.2 LESS THAN 5 SECOND PLOT

LIMIT

§15.231 (a) (1) & RSS210 A1.1.1 (1)

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is set to 1 seconds and the span is set to 0 Hz.

RESULTS


NO non-compliance noted.

Frequency (MHz)	Transmission time (ms)	Limit (Second)	Remark
315	381.7	5.00	PASS

HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 9 of 16

LESS THAN 5 SECONDS

□ RESULT PLOTS

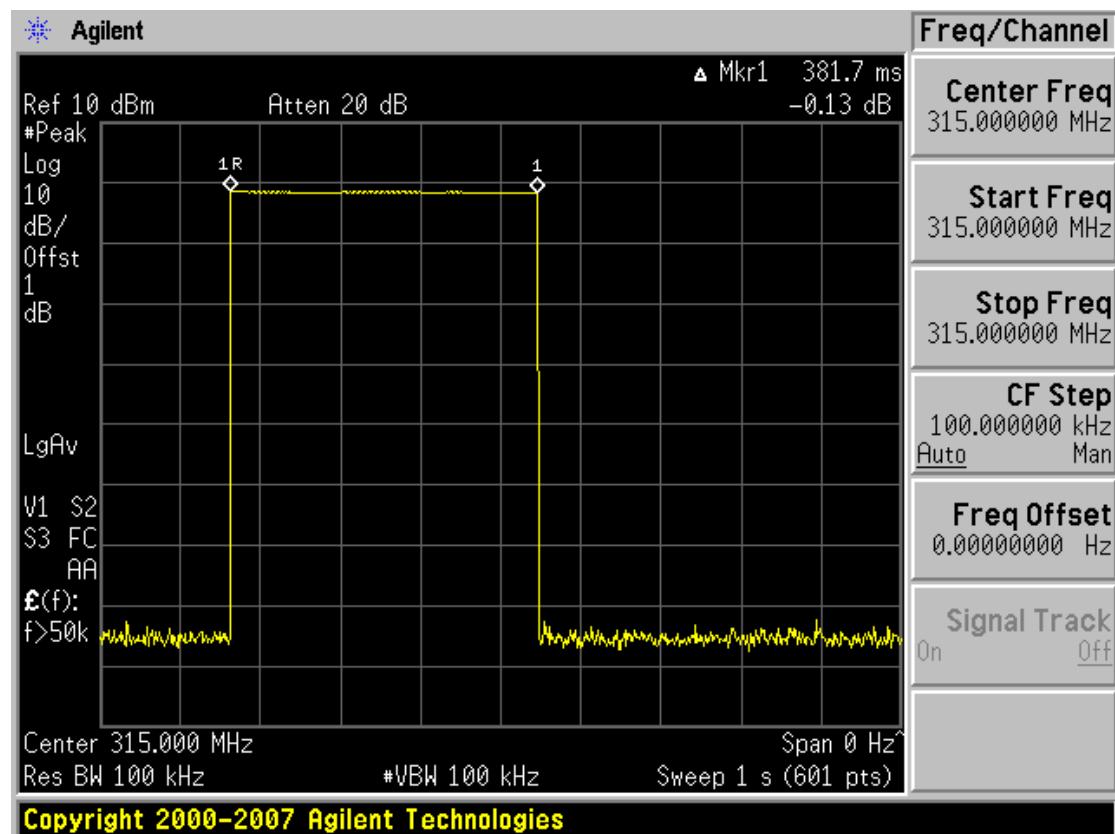

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 10 of 16



7.3 RADIATED EMISSIONS

7.3.1 TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.231 (b) In addition to the provisions of §15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following.

Fundametal Frequency (MHz)	Field Strength of fundamental (uV/m)	Field Strength of Spurious Emissions (uV/m)
40.66 ~ 40.70	2250	225
70 ~ 130	1250	125
130 ~ 174	1250 to 3750 **	125 to 375 **
174 ~ 260	3750	375
260 ~ 470	3750 to 12500 **	375 to 1250 **
Above 470	12500	1250

** Linear interpolations

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table ;


Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)
30-88	100**	40.0
88-216	150**	43.5
216-960	200**	46.0
Above 960	500	54.0

** Except as provided in paragraph (g), fundamental emissions rom intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz However, operation within these frequency bands is permitted under other sections of this part, e.g., Sections 15.231 and 15.241


HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 11 of 16

Test Configuration

Below 30 MHz

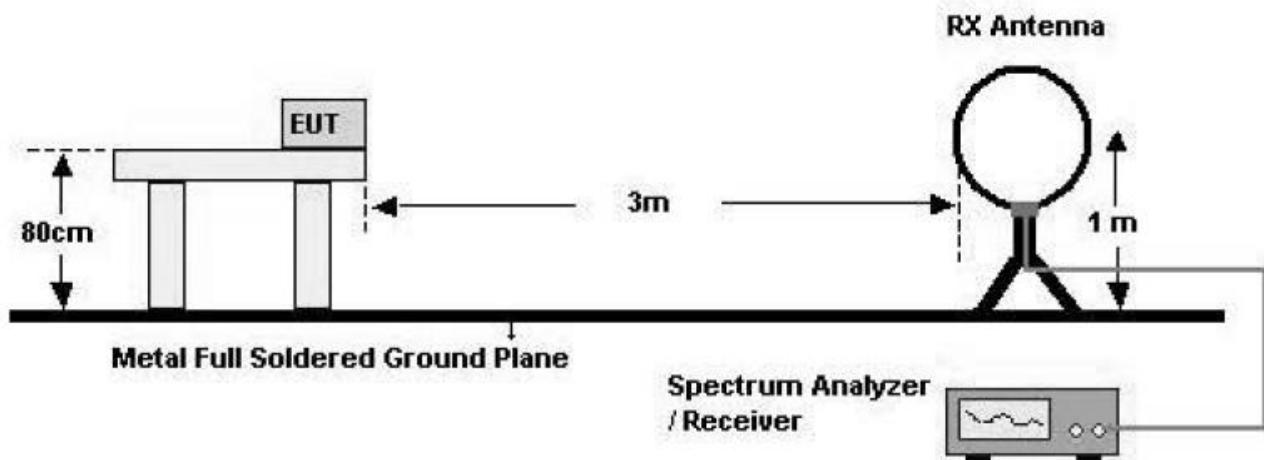


30 MHz - 1 GHz

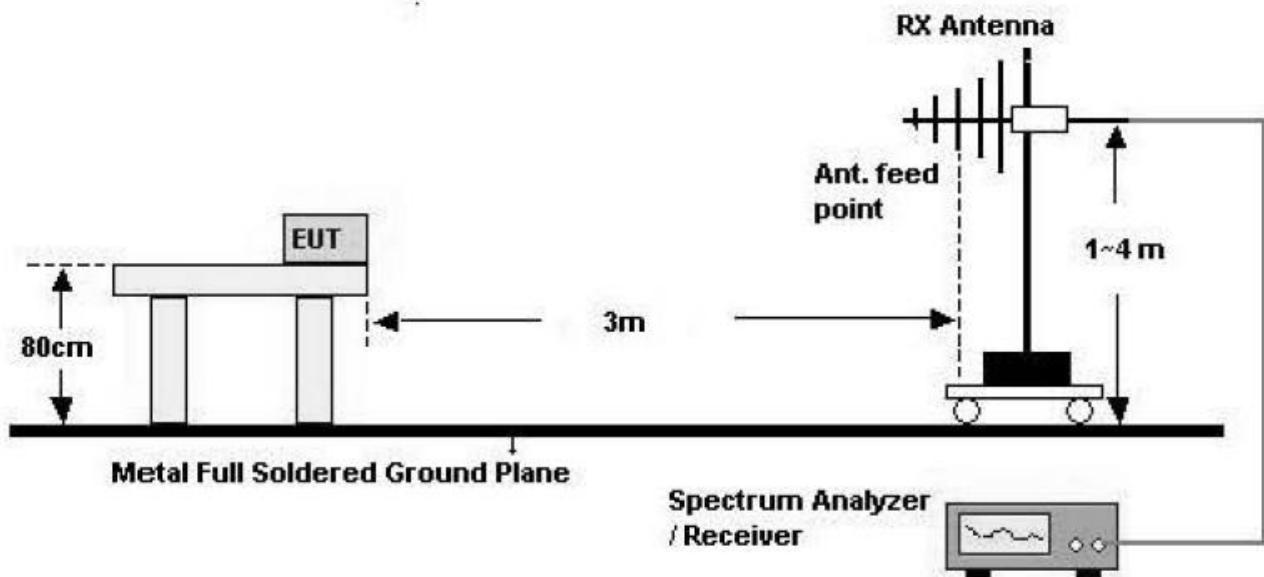

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034		Page 1 2 of 16

Above 1 GHz

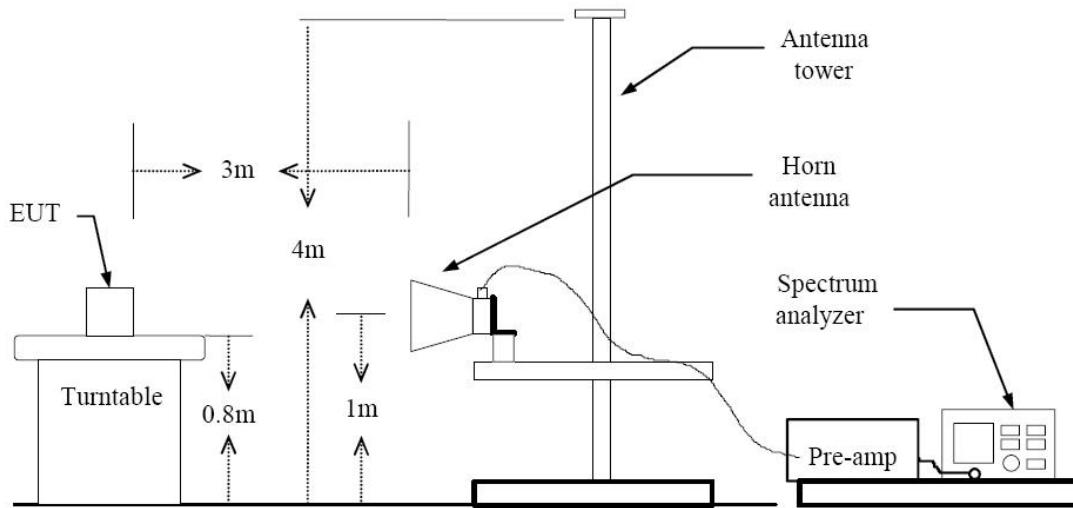

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz or quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and -6.56 duty cycle for a average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 1 3 of 16



7.3.2 TEST RESULTS

Table 1: Measured values of the Field strength

Frequency [MHz]	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBuV/m]	Limit dBuV/m	Margin [dB]
PEAK data									
315	57.70	13.2	4.3	H	1.10	237.0	75.20	95.6	20.40
315	36.63	13.2	4.3	V	1.12	100.7	54.13	95.6	41.47
630	21.03	19.5	5.9	H	1.53	90.0	46.43	75.6	29.17
630	21.61	19.5	5.9	V	1.00	250.0	47.01	75.6	28.59
945	20.68	23.5	7.6	H	1.20	270.0	51.78	75.6	23.82
945	19.77	23.5	7.6	V	1.33	293.0	50.87	75.6	24.73

Note

1. The antenna is manipulated through typical positions, polarity and length during the testing
2. The frequency range was scanned from 25 MHz to 4 GHz and the worst-case emissions are reported.
3. There is detected level above reference noise floor spectrum analyzer. Except above frequency
4. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane.
5. According to ANSI C63.4, If the peak(or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement. So peak value is 75.2 dBuV and complies with average limit(75.6 dBuV).

HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 1 4 of 16



7.3.3 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 dB/m and a Cable Factor of 1.1 dB is added. The 30 dBuV/m value is mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

HCT PT.15.231 TEST REPORT		FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 15 of 16



8. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	04/05/2011	861741/013
Rohde & Schwarz	ESH3-Z6/ LISN	Annual	06/13/2010	100329
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	12/18/2010	9160-3150
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/30/2010	375.8810.352
MITEQ	AMF-6D-001180-35-20P/AMP	Annual	05/20/2010	990893
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	09/23/2011	296
Rohde & Schwarz	FSP30 / Spectrum Analyzer	Annual	07/31/2010	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	12/23/2010	US45303008
Agilent	E4416A /Power Meter	Annual	01/14/2011	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	07/28/2010	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	06/29/2010	1
Hewlett Packard	11636B/Power Divider	Annual	12/24/2010	11377
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/08/2011	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	12/01/2010	010002156287001199
TESCOM	TC-3000A / BLUETOOTH TESTER	Annual	01/11/2011	3000A490112
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	06/22/2010	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/13/2012	9009-2536

HCT PT.15.231 TEST REPORT	FCC & IC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1004FR22-1	Date of Issue: April 30, 2010	EUT Type: Remote Keyless Entry	FCC ID: TQ8HM-T034	IC: 5074A-HMT034	Page 16 of 16