

# TEST REPORT

ACCORDING TO: FCC CFR 47 PART 15 Subpart C, §15.247

FOR:

**Bioness Neuromodulation Ltd. – A Bioness Inc Company**

**NESS H200 RF Wireless Orthosis, Right (RFSO)**

**Model number: H2W-5A00**

**FCC ID:TVF-H200W-RFSO**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.  
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information .....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary .....	4
6	EUT description .....	5
6.1	General information .....	5
6.2	Ports and lines .....	5
6.3	EUT mode of operation .....	5
6.4	Changes made in the EUT .....	5
6.5	Test configuration .....	6
6.6	Transmitter characteristics .....	8
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements .....	9
7.1	Minimum 6 dB bandwidth .....	9
7.2	Peak output power .....	14
7.3	Field strength of spurious emissions .....	19
7.4	Peak spectral power density .....	41
7.5	Conducted emissions .....	48
8	APPENDIX A Test equipment and ancillaries used for tests .....	51
9	APPENDIX B Measurement uncertainties .....	52
10	APPENDIX C Test laboratory description .....	53
11	APPENDIX D Specification references .....	53
12	APPENDIX E Test equipment correction factors .....	54
13	APPENDIX F Abbreviations and acronyms .....	63

## 1 Applicant information

**Client name:** Bioness Neuromodulation Ltd. – A Bioness Inc Company  
**Address:** P.O.Box 2500, 19 Ha'haroshet street, Ra'anana 43654, Israel  
**Telephone:** +972 9790 7100  
**Fax:** +972 9748 5740  
**E-mail:** eyal.lasko@bioness.co.il  
**Contact name:** Mr. Eyal Lasko

## 2 Equipment under test attributes

**Product name:** NESS H200 RF Wireless Orthosis, Right (RFSO)  
**Product type:** Transceiver  
**Model(s):** H2W-5A00  
**Serial number:** 001  
**Hardware version:** 2.0.1  
**Software release:** 1.0.0  
**Receipt date** 12/28/2010

## 3 Manufacturer information

**Manufacturer name:** Bioness Neuromodulation Ltd. – A Bioness Inc Company  
**Address:** P.O.Box 2500, 19 Ha'haroshet street, Ra'anana 43654, Israel  
**Telephone:** +972 9790 7100  
**Fax:** +972 9748 5740  
**E-Mail:** eyal.lasko@bioness.co.il  
**Contact name:** Mr. Eyal Lasko

## 4 Test details

**Project ID:** 21560  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 12/30/2010  
**Test completed:** 1/18/2011  
**Test specification(s):** FCC 47CFR Part 15, subpart C, §15.247




## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC section 15.247(a)(2), 6 dB bandwidth	Pass
FCC section 15.247(b)(3), Peak output power	Pass
FCC section 15.247(d), Radiated spurious emissions	Pass
FCC section 15.247(e), Peak power density	Pass
FCC section 15.247(i), section 5.5, RF exposure	Pass, Exhibit provided in documentation for Application
FCC section 15.207(a), Conducted emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report supersedes the previously issued test report identified by Doc ID:BIORAD\_FCC.21560.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. A. Troupiansky, test engineer	January 18, 2011	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	October 10, 2012	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and Radio group manager	October 11, 2012	

## 6 EUT description

### 6.1 General information

The EUT, RF-controlled orthosis (RFSO), is a part of NESS H200 Wireless Hand Rehabilitation System, which delivers electrical stimulation transcutaneously to the nerves of the flexor and extensor muscles that control the hand. The system is indicated for the following functional and therapeutic uses:

- Improvement of hand function and active range of motion in patients with hemiplegia due to stroke or upper limb paralysis due to C5 spinal cord injury;
- Maintenance and/or increase of range of motion;
- Prevention and/or retardation of disuse atrophy;
- Increase of local blood circulation.

The H200 Wireless system comprises of the following units:

Description	Model or P/N	Hardware revision	Software release	Serial number
NESS H200 Wireless Control Unit	H2W-5600	2.0	1.0.0	001
NESS H200 Wireless System Charger by Friwo (AC/DC adapter)	LG3-5C00 (Friwo P/N FW7555M/05)	NA	NA	NA
NESS H200 RF Wireless Orthosis, Right (RFSO)	H2W-5A00	2.0.1	1.0.0	001

The RF-controlled orthosis (RFSO) stabilizes the wrist at a functional angle and transmits electrical stimulation through a five-electrode configuration.

A wireless, handheld Control Unit, used to start and stop stimulation, adjust stimulation intensity, and select among multiple clinician-designed stimulation programs.

These components communicate wirelessly to provide hand flexion or extension in functional and therapeutic modes.

### 6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC power	AC mains	AC/DC adapter	1	NA	Wall mounted
Power	DC power	AC/DC adapter	EUT	1	Unshielded	1.5

### 6.3 EUT mode of operation

The NESS H200 Wireless Control Unit sends commands for starting stimulation, the NESS H200 RF Wireless Orthosis, Right (RFSO) is connected to the NESS H200 Wireless System Charger and generates stimulation sequences and transmits messages back to the NESS H200 Wireless Control Unit; the NESS H200 Wireless Control Unit transmits messages (command/ACK) to the NESS H200 RF Wireless Orthosis, Right (RFSO).

### 6.4 Changes made in the EUT

No changes were implemented during the testing.

## 6.5 Test configuration

Photograph 6.5.1 EUT in X-axis orthogonal position



Photograph 6.5.2 EUT in Y-axis orthogonal position



Photograph 6.5.3 EUT in Z-axis orthogonal position



## 6.6 Transmitter characteristics

<b>Type of equipment</b>						
<b>V</b>	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
<b>Intended use</b>		<b>Condition of use</b>				
	fixed	Always at a distance more than 2 m from all people				
	mobile	Always at a distance more than 20 cm from all people				
<b>V</b>	portable	May operate at a distance closer than 20 cm to human body				
<b>Assigned frequency range</b>		2400.0 – 2483.5 MHz				
<b>Operating frequency range</b>		2401.0 – 2482.0 MHz				
<b>RF channel spacing</b>		1000 kHz				
<b>Maximum rated output power</b>		At transmitter 50 $\Omega$ RF output connector			NA	
		Peak power			2.7 dBm	
<b>Is transmitter output power variable?</b>		<b>V</b>	No			
			Yes	continuous variable		
				stepped variable with stepsize		
				minimum RF power	dB	
				maximum RF power	dBm	
<b>Antenna connection</b>						
unique coupling	standard connector	<b>V</b>	integral	with temporary RF connector		
				without temporary RF connector		
<b>Antenna/s technical characteristics</b>						
Type	Manufacturer	Model number		Gain		
Chip Antenna 2.4GHz	Fractus	FR05-S1-N-0-102		-2.3 dBi		
<b>Transmitter aggregate data rate/s</b>		0.25 Mbps				
<b>Type of modulation</b>		FSK				
<b>Type of multiplexing</b>		NA				
<b>Modulating test signal (baseband)</b>		Binary data message				
<b>Maximum transmitter duty cycle in normal use</b>		Refer to the manufacturer declaration				
<b>Transmitter duty cycle supplied for test</b>		100 %	<b>Tx ON time</b>	NA	<b>Period</b>	
					NA	
<b>Transmitter power source</b>						
<b>V</b>	Battery	<b>Nominal rated voltage</b>	3.7 VDC	<b>Battery type</b>	Rechargeable, Li-Poly, 280-350mAh	
	DC	<b>Nominal rated voltage</b>				
	AC mains	<b>Nominal rated voltage</b>		<b>Frequency</b>	Hz	
<b>Common power source for transmitter and receiver</b>		<b>V</b>	yes	no		



<b>Test specification:</b>		<b>FCC section 15.247(a)(2), 6 dB bandwidth</b>	
<b>Test procedure:</b>		FR Vol.62, page 26243, Section 15.247(a)2	
<b>Test mode:</b>	Compliance	<b>Verdict:</b> PASS	
<b>Date:</b>	1/18/2011		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 Minimum 6 dB bandwidth

#### 7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
<b>2400.0 – 2483.5</b>		
5725.0 – 5850.0		

\* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

#### 7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 The 6 dB bandwidth test setup





HERMON LABORATORIES

<b>Test specification:</b>		<b>FCC section 15.247(a)(2), 6 dB bandwidth</b>	
<b>Test procedure:</b>		FR Vol.62, page 26243, Section 15.247(a)2	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		1/18/2011	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Table 7.1.2 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400.0 – 2483.5 MHz  
 DETECTOR USED: Peak  
 SWEEP MODE: Single  
 SWEEP TIME: Auto  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: 300 kHz  
 MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc  
 MODULATION: FSK  
 MODULATING SIGNAL: Binary data message  
 BIT RATE: 0.25 Mbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
2401.0	820	500.0	-148.0	Pass
2441.0	800	500.0	-300.0	Pass
2482.0	815	500.0	-520.0	Pass


**Reference numbers of test equipment used**

HL 1446	HL 2909							
---------	---------	--	--	--	--	--	--	--


Full description is given in Appendix A.

<b>Test specification:</b> FCC section 15.247(a)(2), 6 dB bandwidth			
<b>Test procedure:</b> FR Vol.62, page 26243, Section 15.247(a)2			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date:</b> 1/18/2011			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Plot 7.1.1 The 6 dB bandwidth test result at low frequency

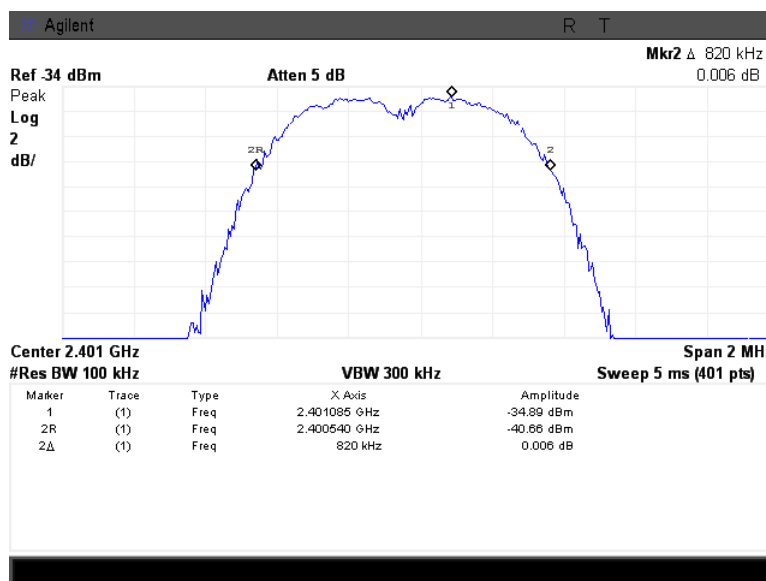


Plot 7.1.2 The 99% power bandwidth test result at low frequency

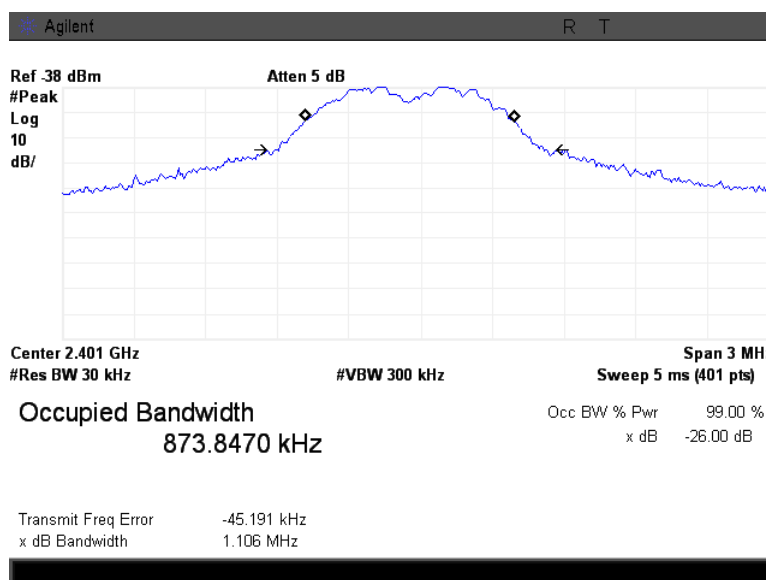


<b>Test specification:</b> FCC section 15.247(a)(2), 6 dB bandwidth			
<b>Test procedure:</b> FR Vol.62, page 26243, Section 15.247(a)2			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date:</b> 1/18/2011			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Plot 7.1.3 The 6 dB bandwidth test result at mid frequency

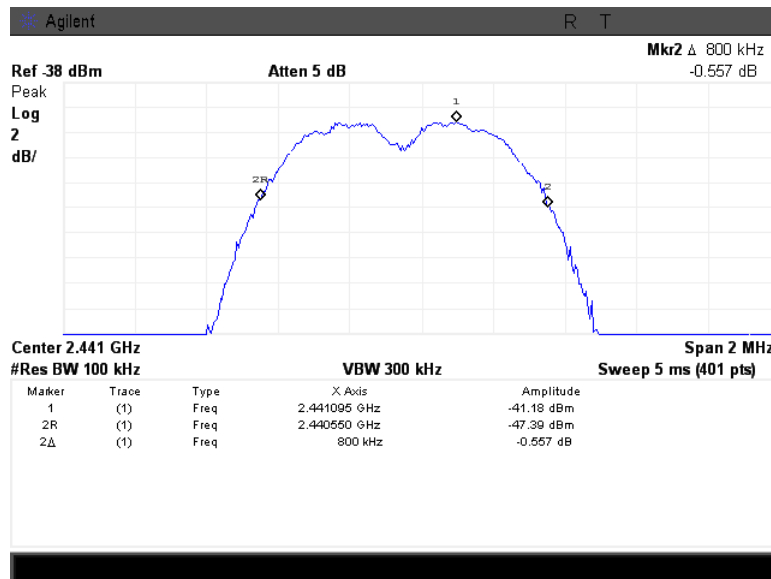


Plot 7.1.4 The 99% power bandwidth test result at mid frequency

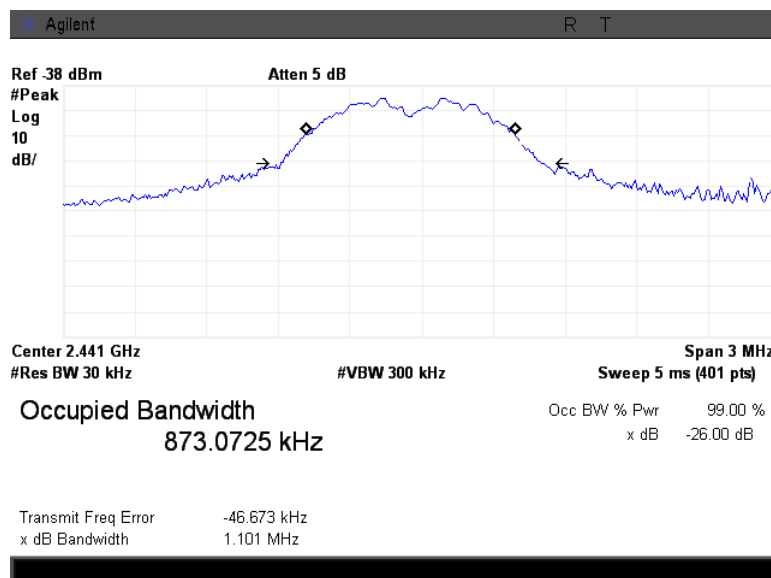


<b>Test specification:</b> FCC section 15.247(a)(2), 6 dB bandwidth			
<b>Test procedure:</b> FR Vol.62, page 26243, Section 15.247(a)2			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date:</b> 1/18/2011			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 41 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Plot 7.1.5 The 6 dB bandwidth test result at high frequency

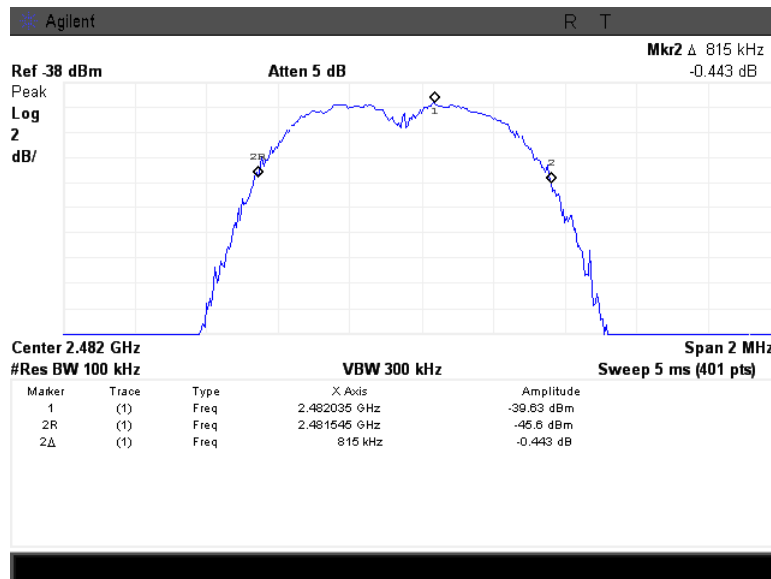

Plot 7.1.6 The 99% power bandwidth test result at high frequency

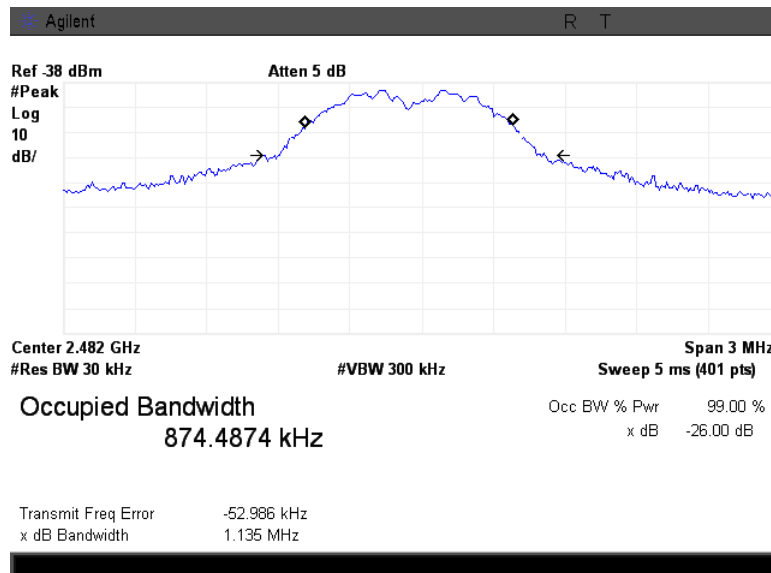



<b>Test specification:</b>		<b>FCC section 15.247(b)3, Peak output power</b>	
<b>Test procedure:</b>		FR Vol.62, page 26243, Section 15.247(b)	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		1/18/2011	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 43 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

## 7.2 Peak output power

### 7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

**Table 7.2.1 Peak output power limits**

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
2400.0 – 2483.5	6.0	1.0	30.0	131.2

\*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;  
without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;  
by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

\*\* - Equivalent field strength limit was calculated from the peak output power as follows:  $E = \sqrt{30 \times P \times G} / r$ , where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

### 7.2.2 Test procedure

**7.2.2.1** The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

**7.2.2.2** The EUT was adjusted to produce maximum available to end user RF output power.

**7.2.2.3** The field strength of the EUT fundamental emission was measured in 3 orthogonal positions of the device.

**7.2.2.4** The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

**7.2.2.5** The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

**7.2.2.6** The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

**7.2.2.7** The worst test results (the lowest margins) were recorded in Table 7.2.2.

<b>Test specification:</b> FCC section 15.247(b)3, Peak output power			
<b>Test procedure:</b> FR Vol.62, page 26243, Section 15.247(b)			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date:</b> 1/18/2011			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 43 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Figure 7.2.1 Setup for carrier field strength measurements

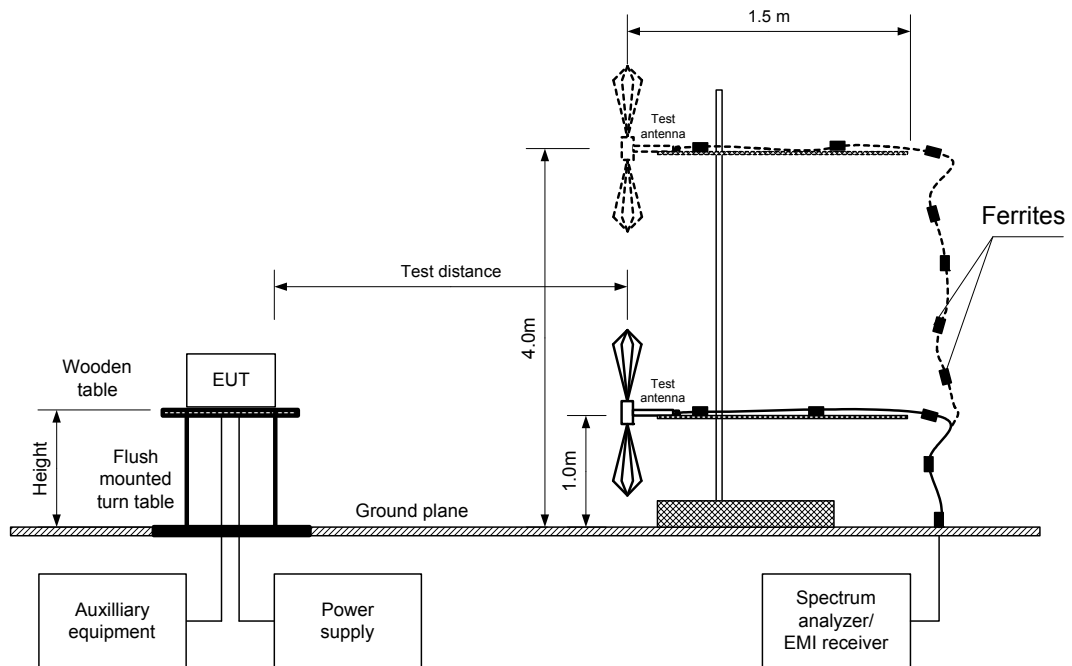



HERMON LABORATORIES

Test specification:	FCC section 15.247(b)3,Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict: PASS	
Date:	1/18/2011		
Temperature: 23 °C	Air Pressure: 1017 hPa	Relative Humidity: 43 %	Power Supply: 3.7 VDC
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: OATS  
 EUT HEIGHT: 0.8 m  
 DETECTOR USED: Peak  
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)  
 MODULATION: FSK  
 BIT RATE: 250 kbps  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 EUT 6 dB BANDWIDTH: 648.0 kHz  
 RESOLUTION BANDWIDTH: 1 MHz  
 VIDEO BANDWIDTH: 3 MHz

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2401.000	95.4	V	1.10	48	-2.3	2.5	30.0	-27.5	Pass
2441.000	95.6	V	1.10	48	-2.3	2.7	30.0	-27.3	Pass
2482.000	94.7	V	1.10	48	-2.3	1.8	30.0	-28.2	Pass

The recorded test results were obtained in the EUT Z-axis position.

\*- EUT front panel refer to 0 degrees position of turntable.

\*\* - Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ , where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

\*\*\* - Margin = Peak output power – specification limit.

#### Reference numbers of test equipment used

HL 1984	HL 2870	HL 2871	HL 3818				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.



<b>Test specification:</b> FCC section 15.247(b)3, Peak output power	
<b>Test procedure:</b> FR Vol.62, page 26243, Section 15.247(b)	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 1/18/2011	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa
	<b>Relative Humidity:</b> 43 %
	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>	


Plot 7.2.1 Field strength of carrier at low frequency

EUT POSITION:	Z-axis
ANTENNA POLARIZATION:	VERTICAL

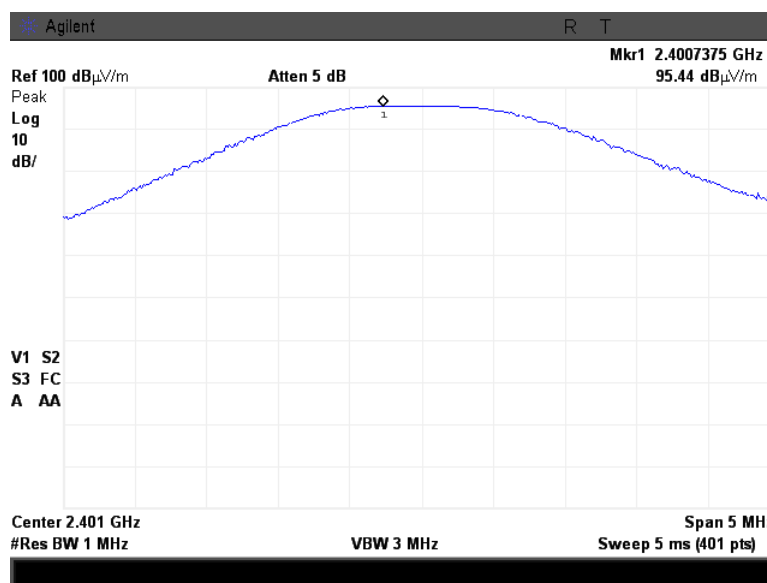

Plot 7.2.2 Field strength of carrier at mid frequency

EUT POSITION:	Z-axis
ANTENNA POLARIZATION:	VERTICAL

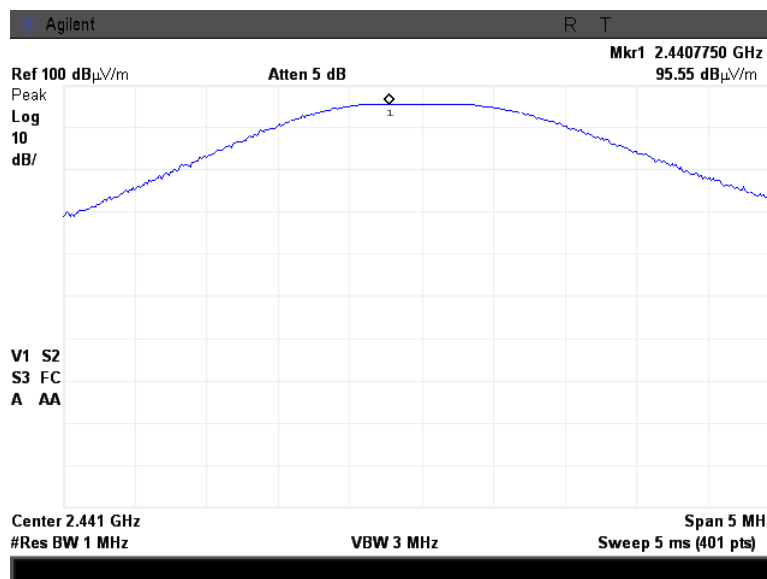




HERMON LABORATORIES

Test specification:		FCC section 15.247(b)3, Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:		Compliance	Verdict: PASS
Date:		1/18/2011	
Temperature: 23 °C	Air Pressure: 1017 hPa	Relative Humidity: 43 %	Power Supply: 3.7 VDC
Remarks:			

Plot 7.2.3 Field strength of carrier at high frequency

EUT POSITION:	Z-axis
ANTENNA POLARIZATION:	VERTICAL

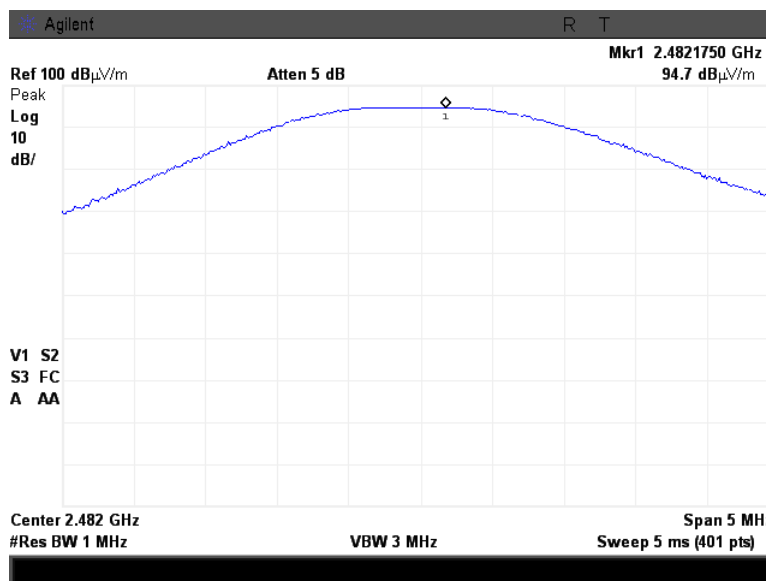



<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

## 7.3 Field strength of spurious emissions

### 7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 <sup>th</sup> harmonic	74.0	NA	54.0	

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\* - The limit decreases linearly with the logarithm of frequency.

\*\*\* - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

### 7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

### 7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

<b>Test specification:</b> FCC section 15.247(d), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date:</b> 12/30/2010			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


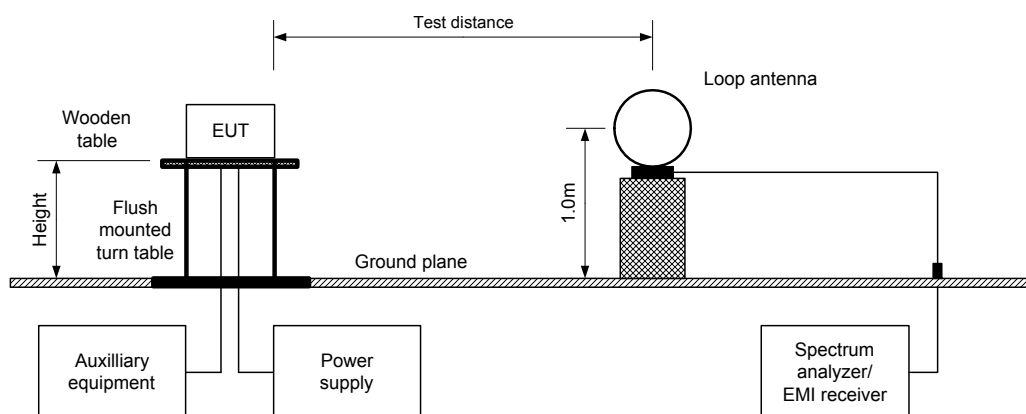


Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz



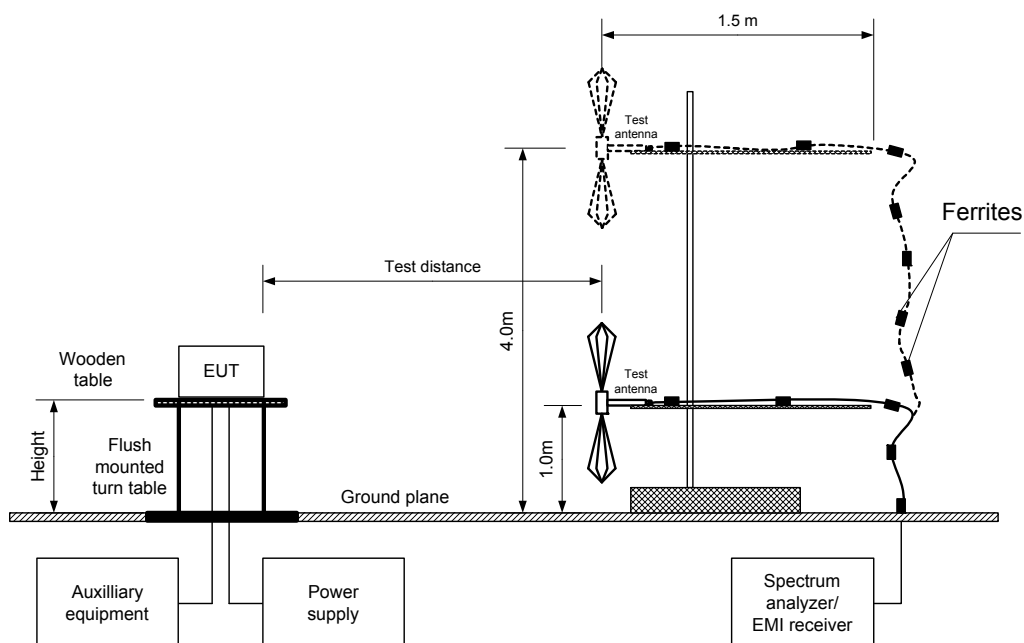

HERMON LABORATORIES

<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

**Table 7.3.2 Field strength of emissions outside restricted bands**

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: FSK  
 BIT RATE: 250 kbps  
 DUTY CYCLE: 100 %  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: 300 kHz  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
<b>Low carrier frequency</b>									
2400.000	57.86	V	1.2	10	95.01	37.15	20.0	-17.15	Pass
<b>Mid carrier frequency</b>									
No emissions were found									Pass
<b>High carrier frequency</b>									
No emissions were found									Pass

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Test specification:		FCC section 15.247(d), Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Verdict: PASS	
Compliance			
Date:		12/30/2010	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 36 %	Power Supply: 3.7 VDC
Remarks:			

**Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands**

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz  
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: FSK  
 BIT RATE: 250 kbps  
 DUTY CYCLE: 100 %  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 1000 kHz  
 TEST ANTENNA TYPE: Double ridged guide

Antenna			Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength				Verdict
Frequency, MHz	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
4802.000	H	1.45	33	50.4	74.0	-23.6	50.4	5.1	54.0	-48.9	Pass
Mid carrier frequency											
4882.000	H	1.30	29	49.9	74.0	-24.10	49.5	4.6	54.0	-49.4	Pass
High carrier frequency											
2483.500	V	1.10	10	62.8	74.0	-11.2	62.8	17.5	54.0	-36.5	Pass
4966.000	H	1.35	40	51.4	74.0	-22.6	51.4	6.1	54.0	-47.9	Pass

\*- EUT front panel refers to 0 degrees position of turntable.

\*\* - Margin = Measured field strength - specification limit.

\*\*\* - Margin = Calculated field strength - specification limit,  
where Calculated field strength = Measured field strength + average factor.

**Table 7.3.4 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
Refer to manufacturer declaration					-45.3 dB

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Customer declaration:

Ton = 0.544 ms

Avg factor = -45.3 dB

Period = 300 ms.






HERMON LABORATORIES

Test specification:		FCC section 15.247(d), Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		12/30/2010	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 36 %	Power Supply: 3.7 VDC
Remarks:			

Plot 7.3.1 Radiated emission measurements at the mid carrier frequency

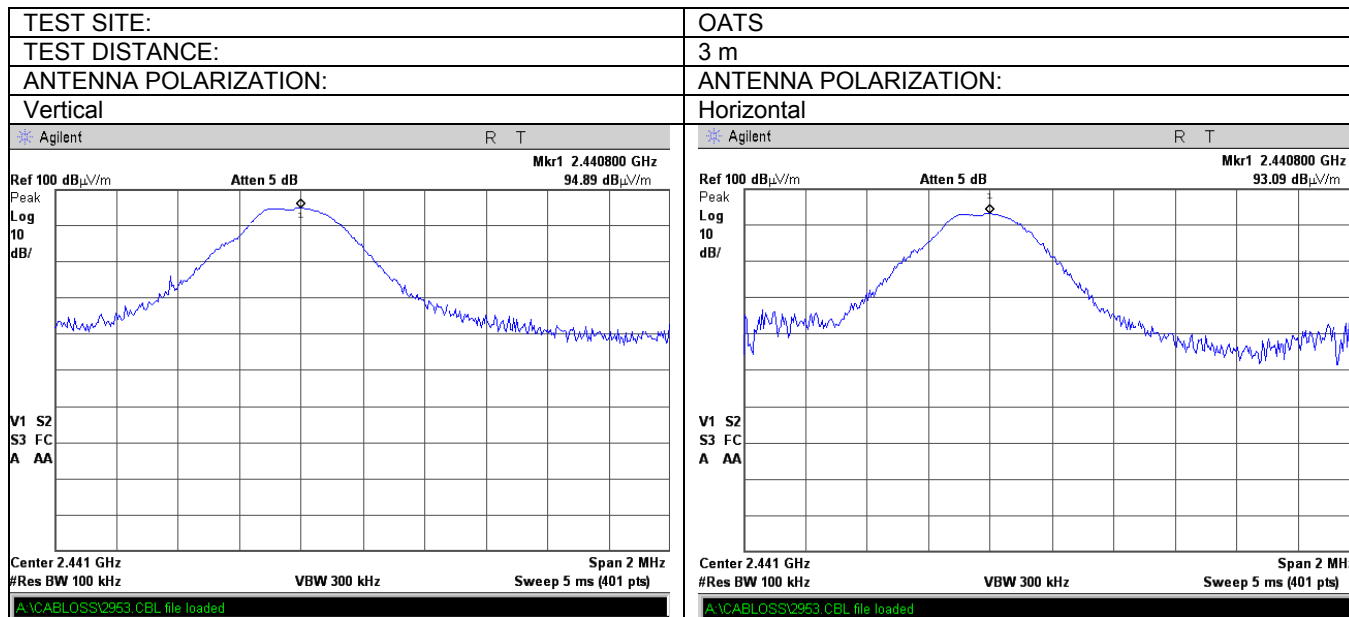




<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			


**Plot 7.3.2 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency**

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

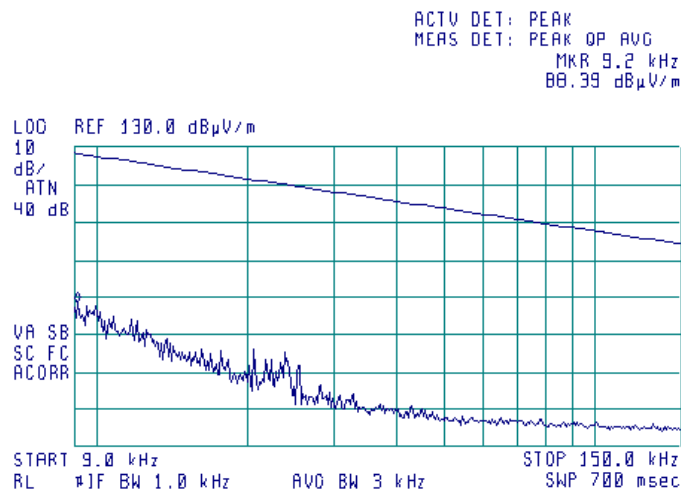

**Plot 7.3.3 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency**

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

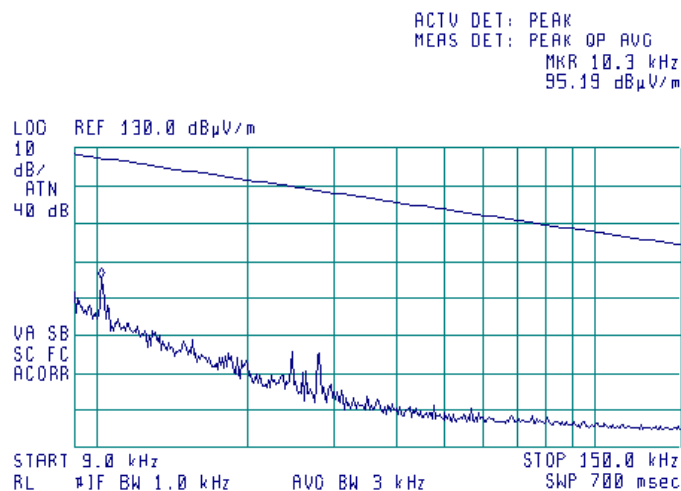




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		12/30/2010	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 36 %	Power Supply: 3.7 VDC
Remarks:			


Plot 7.3.4 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

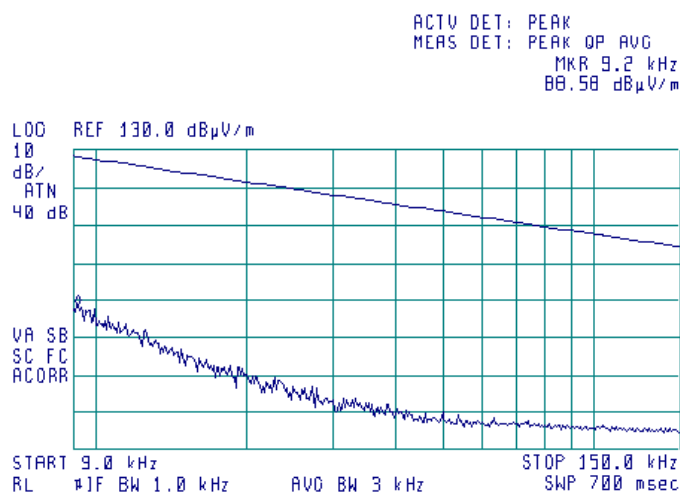

Plot 7.3.5 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

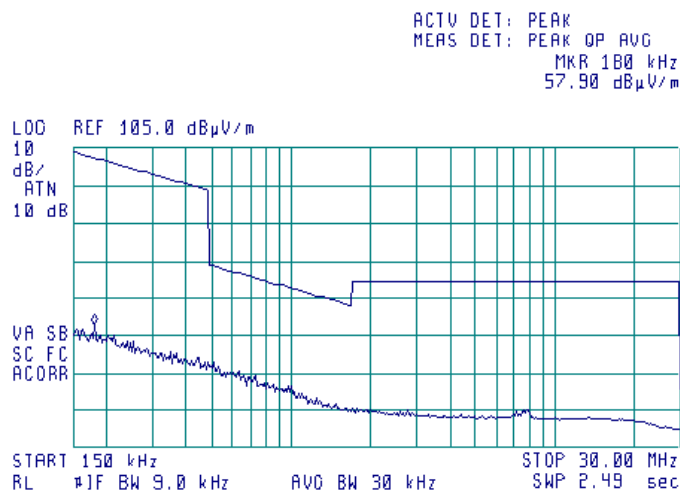




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		12/30/2010	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 36 %	Power Supply: 3.7 VDC
Remarks:			


Plot 7.3.6 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

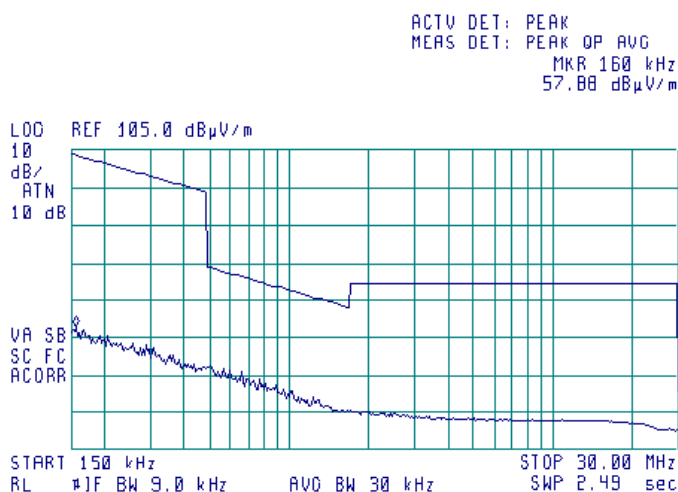

Plot 7.3.7 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

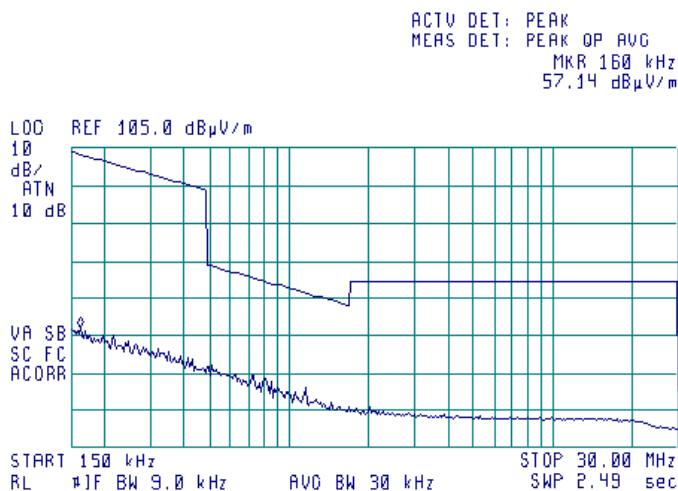




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		12/30/2010	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 36 %	Power Supply: 3.7 VDC
Remarks:			


Plot 7.3.8 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

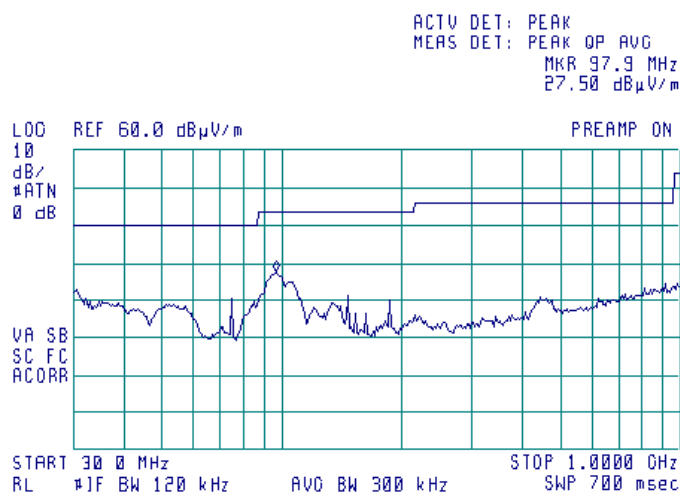

Plot 7.3.9 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

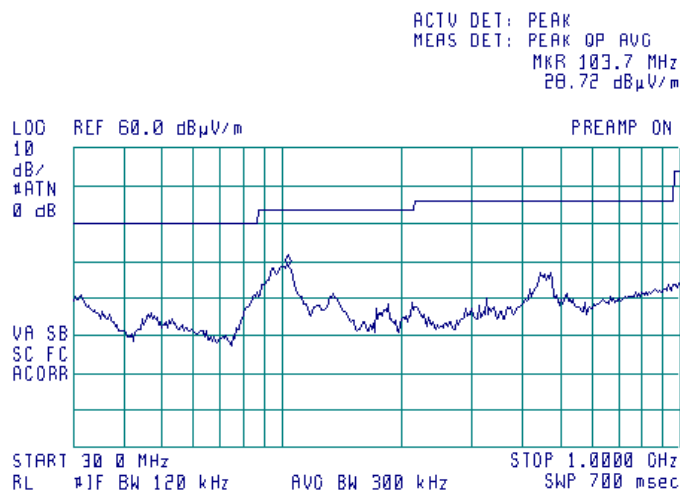




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		12/30/2010	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 36 %	Power Supply: 3.7 VDC
Remarks:			


Plot 7.3.10 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

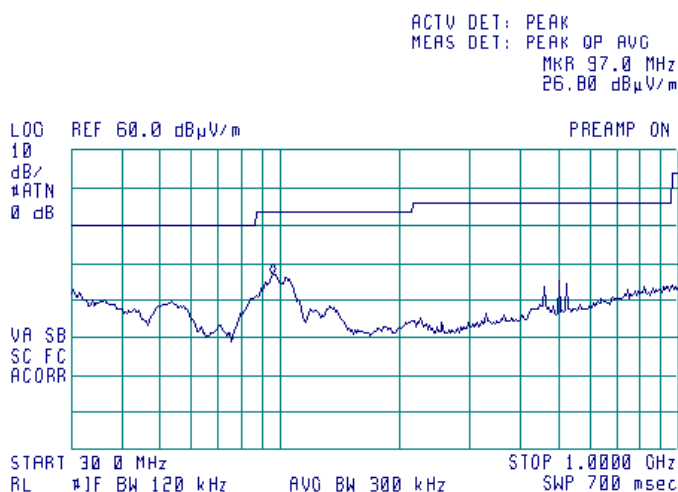

Plot 7.3.11 Radiated emission measurements from 1000 to 2390 MHz at the low carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

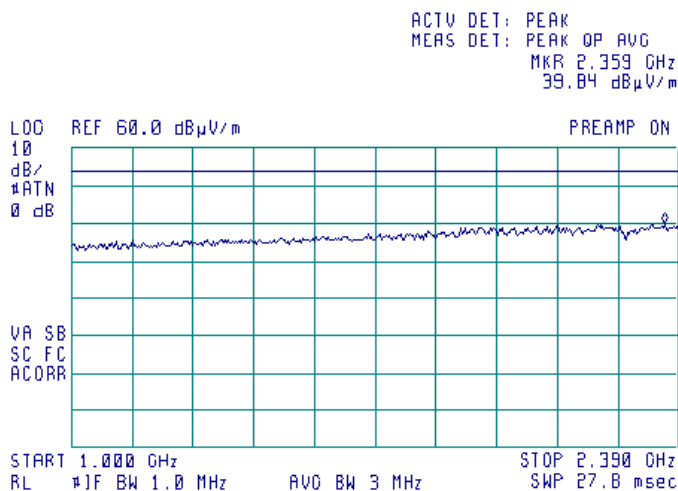




HERMON LABORATORIES

Test specification:		FCC section 15.247(d), Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		12/30/2010	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 36 %	Power Supply: 3.7 VDC
Remarks:			


Plot 7.3.12 Radiated emission measurements from 1000 to 2400 MHz at the mid carrier frequency

TEST SITE: Fully anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

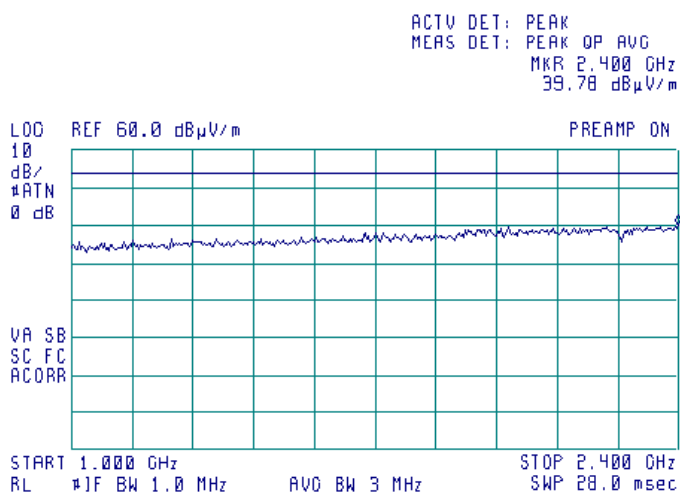

Plot 7.3.13 Radiated emission measurements from 1000 to 2400 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

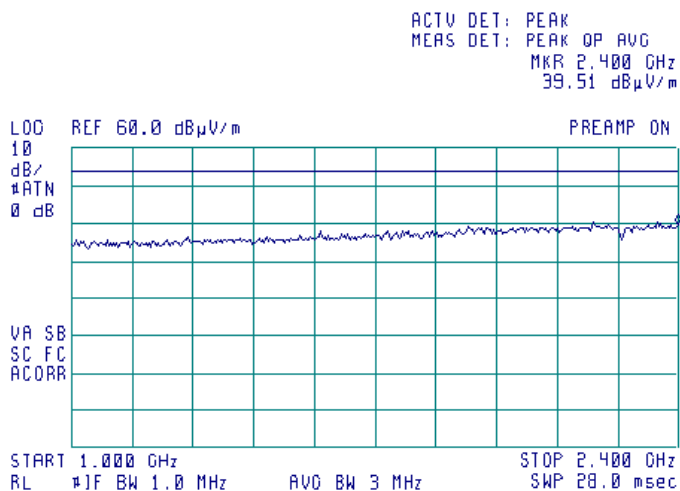

<b>Test specification:</b> FCC section 15.247(d), Radiated spurious emissions	
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa
	<b>Relative Humidity:</b> 36 %
	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>	


Plot 7.3.14 Radiated emission measurements from 2390 to 2402 MHz at the low carrier frequency

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal

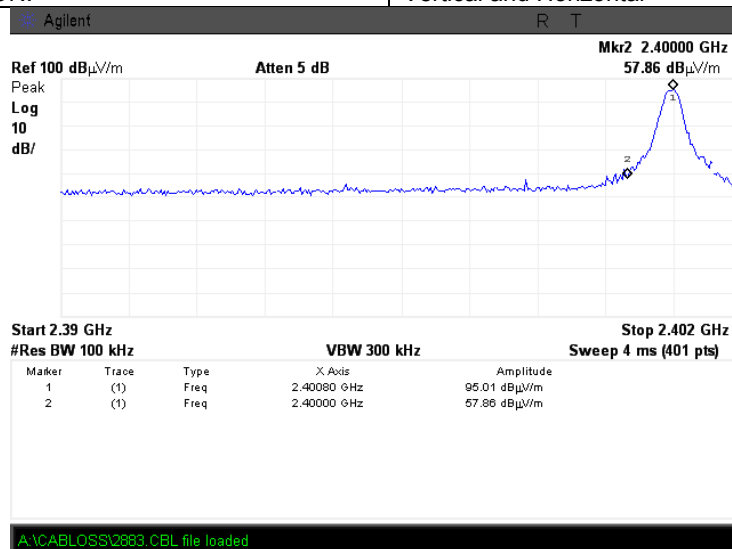

Plot 7.3.15 Radiated emission measurements from 2483.5 to 2900 MHz at the low carrier frequency

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal
DETECTOR / LIMIT	Peak / Average

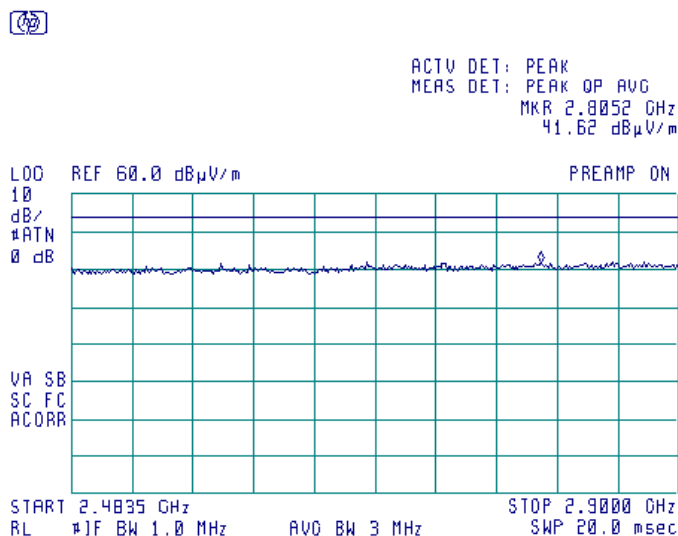




HERMON LABORATORIES

<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

**Plot 7.3.16 Radiated emission measurements from 2483.5 to 2900 MHz at the mid carrier frequency**



TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
DETECTOR / LIMIT Peak / Average

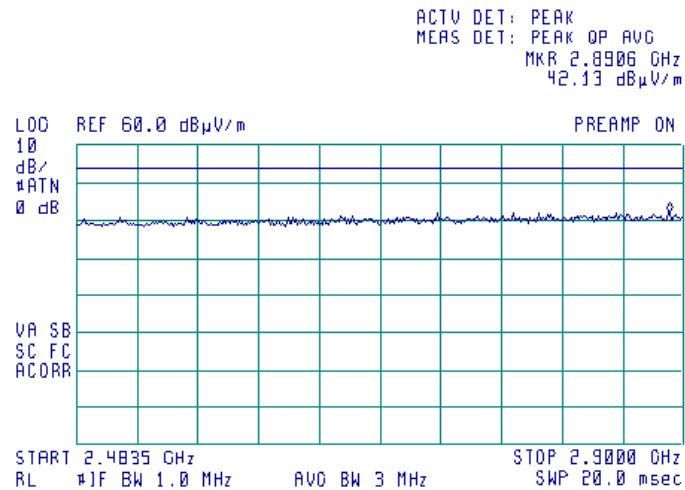



<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b> PASS	
<b>Date:</b>	12/30/2010		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Plot 7.3.17 Radiated emission measurements from 2481 to 2500 MHz at the high carrier frequency

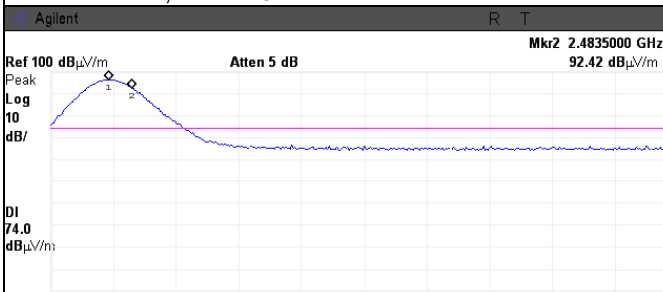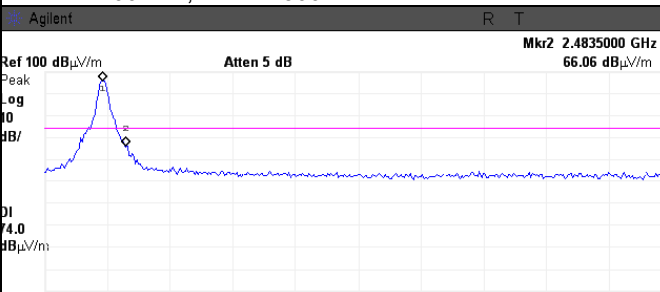
TEST SITE:		Semi anechoic chamber																															
TEST DISTANCE:		3 m																															
ANTENNA POLARIZATION:		Vertical and Horizontal																															
RBW = 1MHz; VBW = 3MHz		RBW = 100 kHz; VBW = 300 kHz																															
																																	
Start 2.481 GHz #Res BW 1 MHz		Start 2.481 GHz #Res BW 100 kHz																															
VBW 3 MHz		VBW 300 kHz																															
Sweep 4 ms (401 pts)		Sweep 4 ms (401 pts)																															
<table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.4827575 GHz</td><td>96.14 dBμV/m</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.4835000 GHz</td><td>92.42 dBμV/m</td></tr></table>		Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.4827575 GHz	96.14 dBμV/m	2	(1)	Freq	2.4835000 GHz	92.42 dBμV/m	<table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.4827575 GHz</td><td>95.68 dBμV/m</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.4835000 GHz</td><td>66.06 dBμV/m</td></tr></table>		Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.4827575 GHz	95.68 dBμV/m	2	(1)	Freq	2.4835000 GHz	66.06 dBμV/m
Marker	Trace	Type	X Axis	Amplitude																													
1	(1)	Freq	2.4827575 GHz	96.14 dBμV/m																													
2	(1)	Freq	2.4835000 GHz	92.42 dBμV/m																													
Marker	Trace	Type	X Axis	Amplitude																													
1	(1)	Freq	2.4827575 GHz	95.68 dBμV/m																													
2	(1)	Freq	2.4835000 GHz	66.06 dBμV/m																													
A:\CABLOSS\2683 CBL file loaded		A:\CABLOSS\2683 CBL file loaded																															
SA reading 1= SA reading Mkr1 = 92.4 dBuV/m		SA reading 2= SA reading Mkr1 = 95.68 dBuV/m SA reading 3= SA reading Mkr2 = 66.06 dBuV/m																															

$$\begin{aligned} \text{Test result} &= \text{SA reading 1} - [(\text{SA reading 2}) - (\text{SA reading 3})] = \\ &= 92.4 - (95.68 - 66.06) = 62.80 \text{ dBuV/m} \end{aligned}$$

<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			


Plot 7.3.18 Radiated emission measurements from 2500 to 2900 MHz at the high carrier frequency

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal

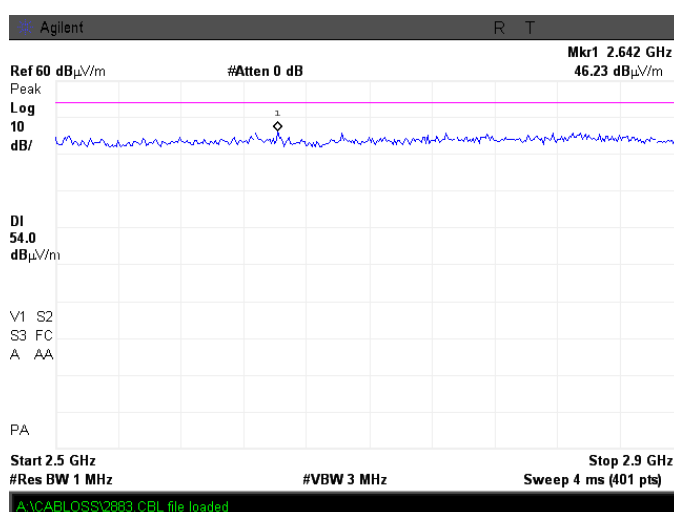

Plot 7.3.19 Radiated emission measurements from 2900 to 6000 MHz at the low carrier frequency


TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal

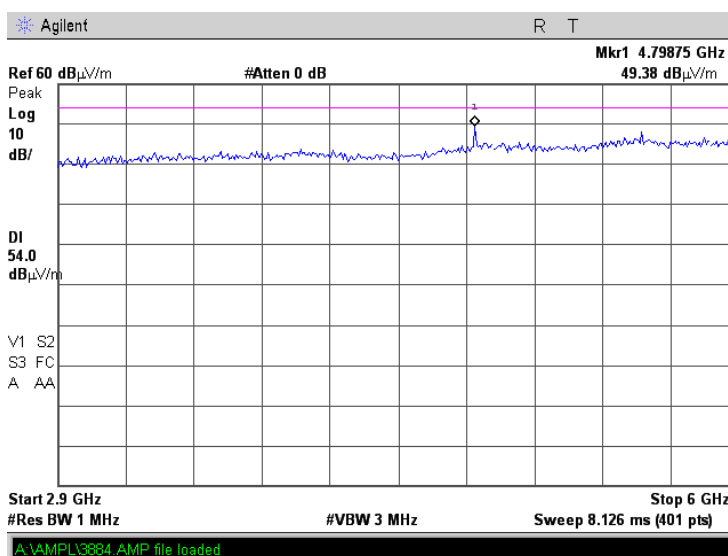

<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			


Plot 7.3.20 Radiated emission measurements from 2900 to 6000 MHz at the mid carrier frequency

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal

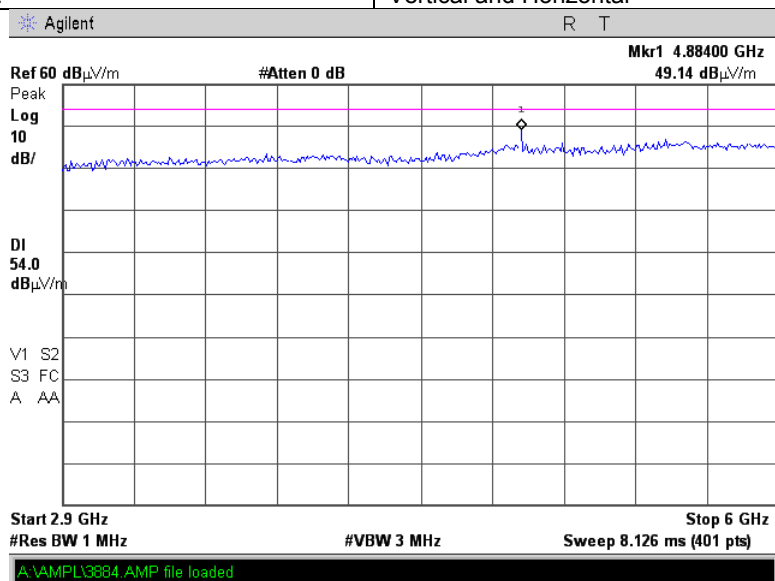


Plot 7.3.21 Radiated emission measurements from 2900 to 6000 MHz at the high carrier frequency

TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal

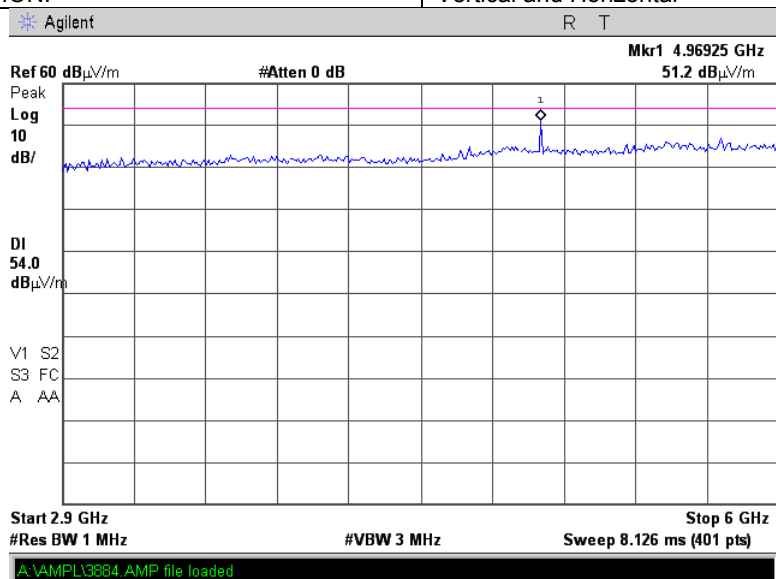


<b>Test specification:</b> FCC section 15.247(d), Radiated spurious emissions	
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa
	<b>Relative Humidity:</b> 36 %
	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>	

Plot 7.3.22 Radiated emission measurements from 6000 to 18000 MHz at the low carrier frequency

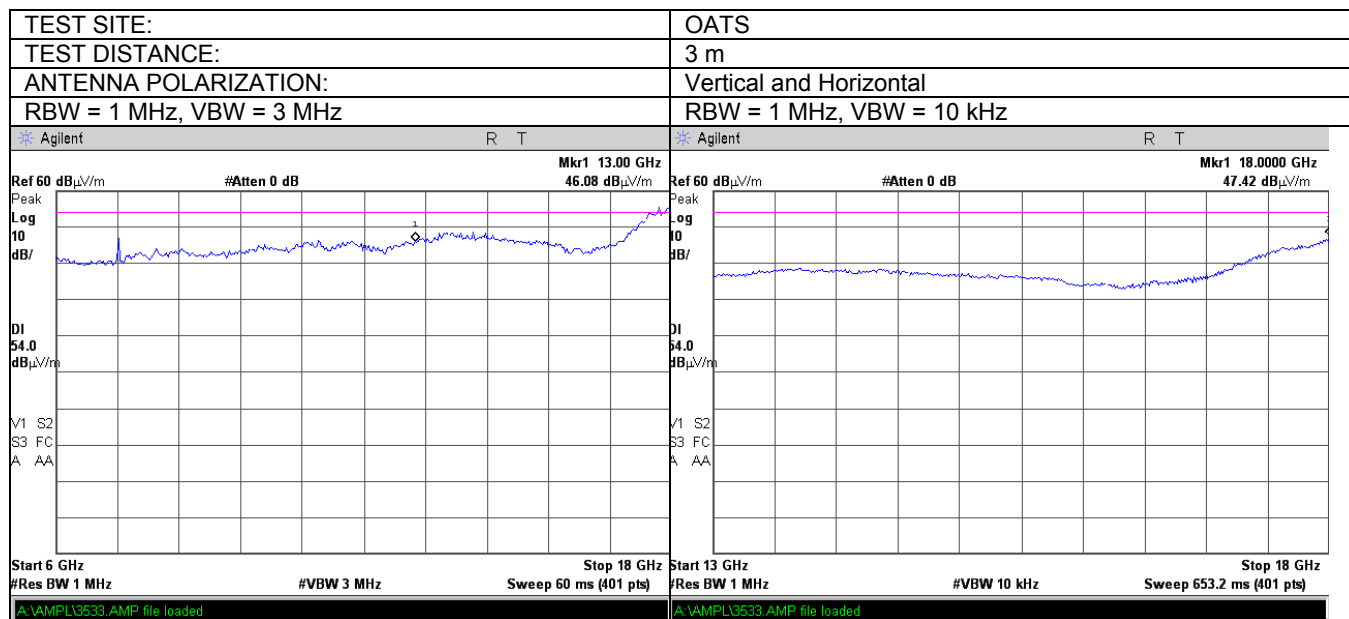


Plot 7.3.23 Radiated emission measurements from 6000 to 18000 MHz at the mid carrier frequency

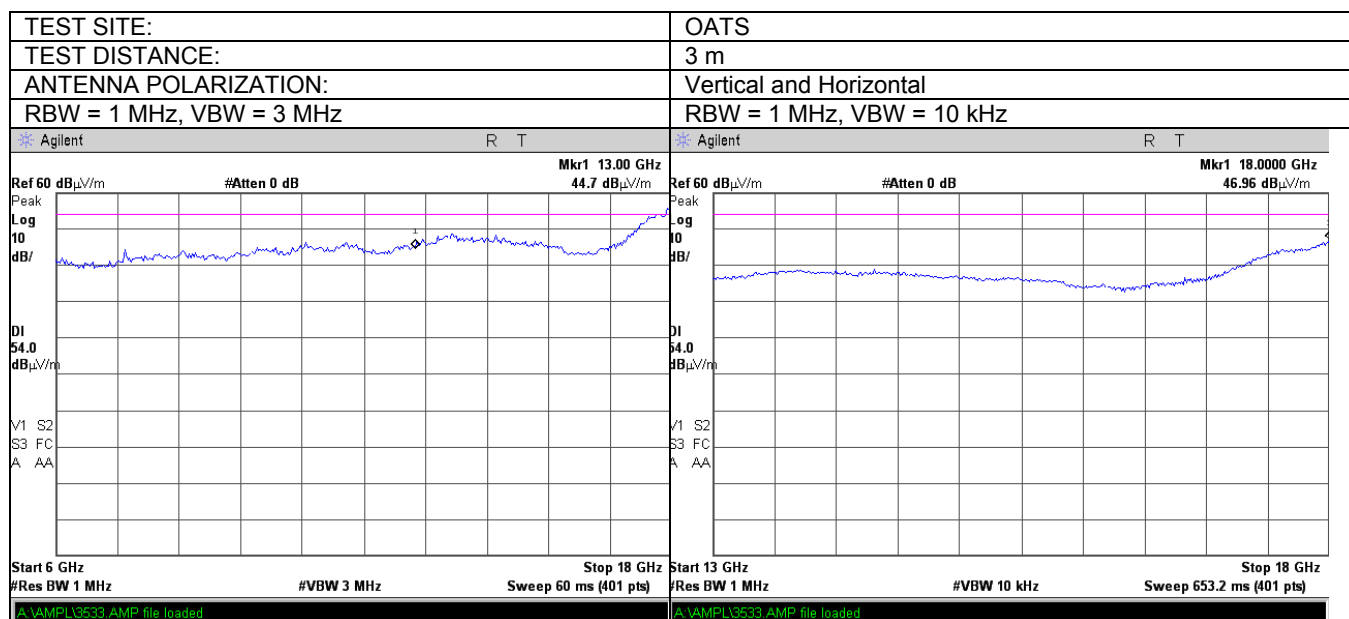


<b>Test specification:</b> FCC section 15.247(d), Radiated spurious emissions	
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa
	<b>Relative Humidity:</b> 36 %
	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>	

Plot 7.3.24 Radiated emission measurements from 6000 to 18000 MHz at the high carrier frequency

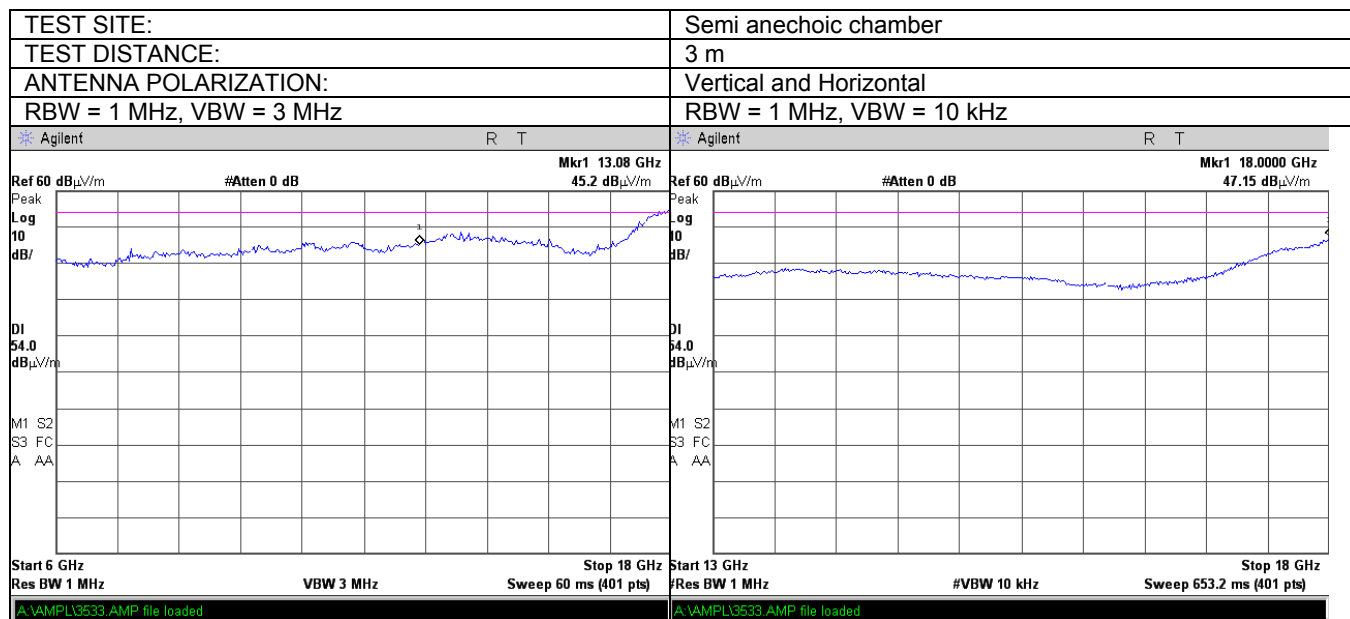

Plot 7.3.25 Radiated emission measurements from 18000 to 25000 MHz at the low carrier frequency


TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

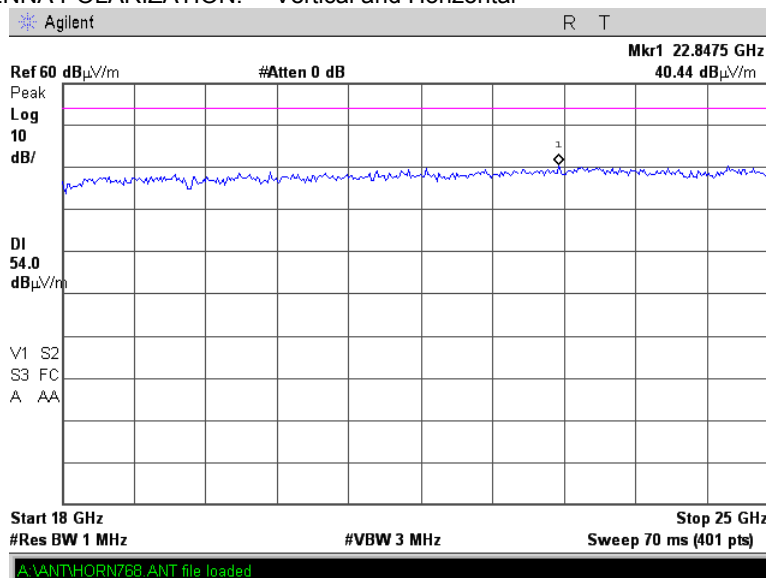

<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			


**Plot 7.3.26 Radiated emission measurements from 18000 to 25000 MHz at the mid carrier frequency**

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

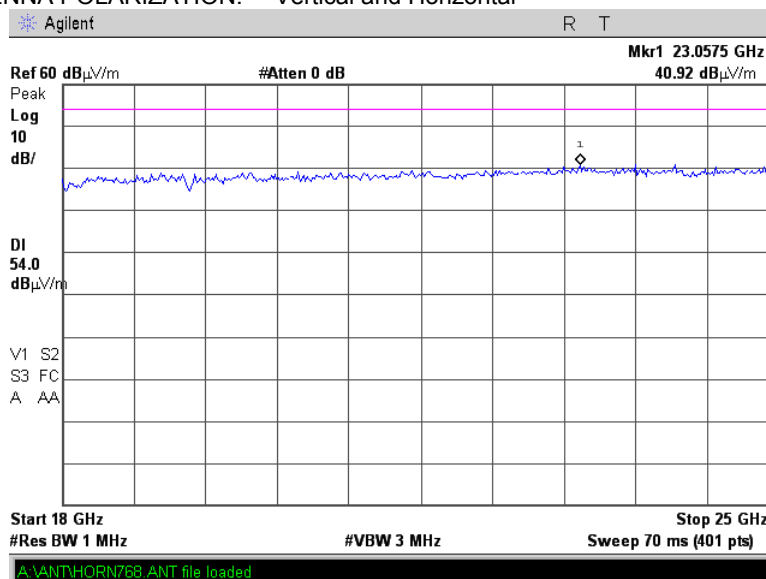

**Plot 7.3.27 Radiated emission measurements from 18000 to 25000 MHz at the high carrier frequency**


TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

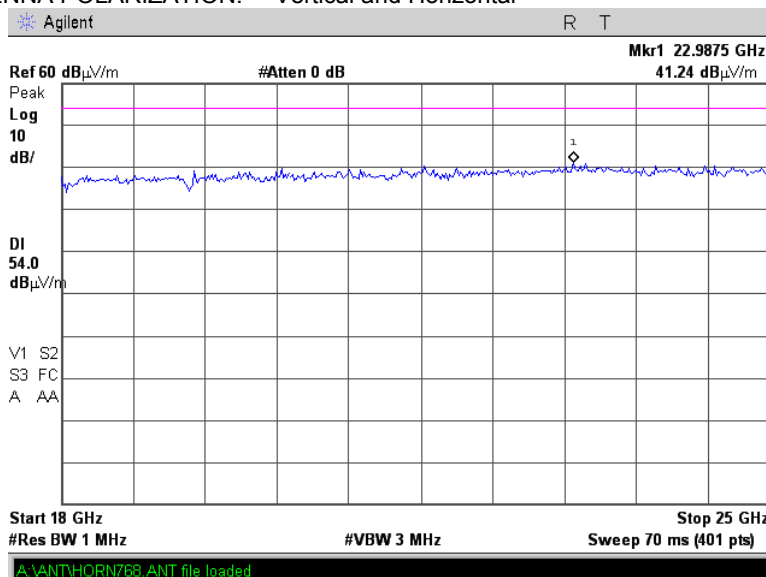

<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

**Plot 7.3.28 Radiated emission measurements at the second harmonic of low carrier frequency**

TEST SITE:	OATS
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal

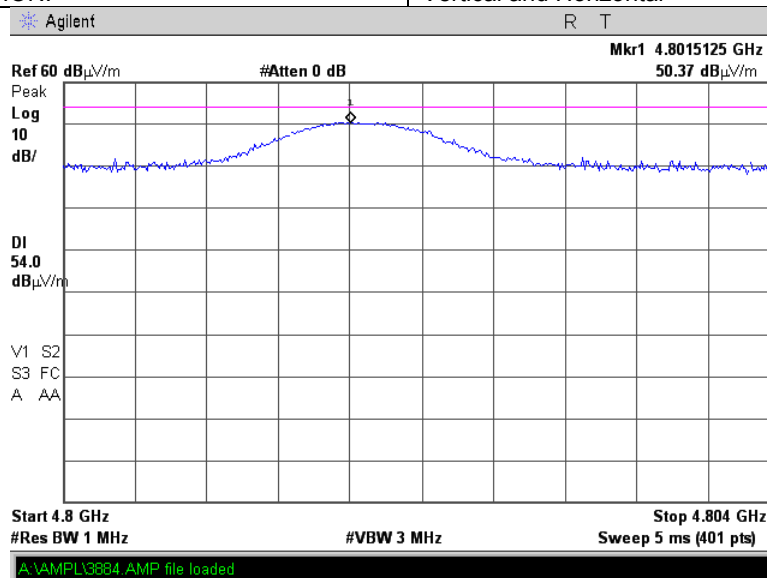

**Plot 7.3.29 Radiated emission measurements at the second harmonic of mid carrier frequency**


TEST SITE:	OATS
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal



<b>Test specification:</b>		<b>FCC section 15.247(d), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		12/30/2010	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1014 hPa	<b>Relative Humidity:</b> 36 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

**Plot 7.3.30 Radiated emission measurements at the second harmonic of high carrier frequency**

TEST SITE:	OATS
TEST DISTANCE:	3 m
ANTENNA POLARIZATION:	Vertical and Horizontal

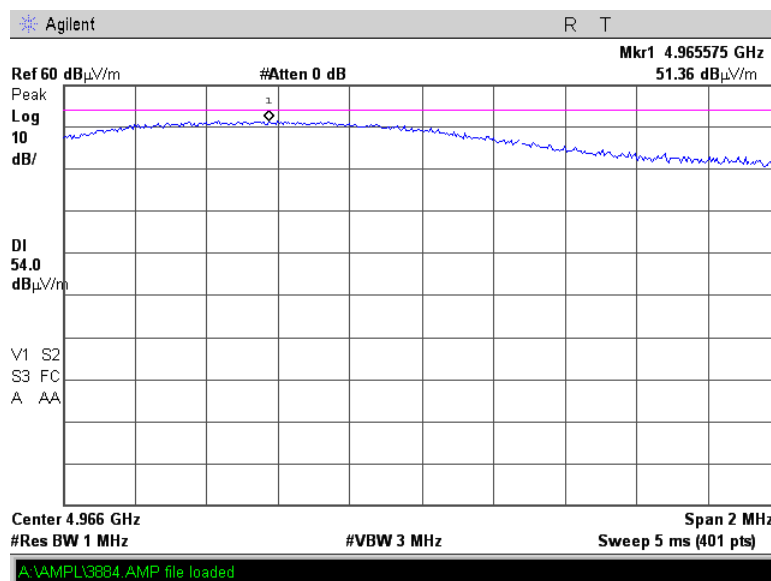





<b>Test specification:</b>		<b>FCC section 15.247(e), Peak power density</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(d)	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		1/3/2011	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 42 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

## 7.4 Peak spectral power density

### 7.4.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
2400.0 – 2483.5	3.0	8.0	103.2

\* - Equivalent field strength limit was calculated from the peak spectral power density as follows:  $E = \sqrt{30 \times P} / r$ , where P is peak spectral power density and r is antenna to EUT distance in meters.

### 7.4.2 Test procedure for field strength measurements

**7.4.2.1** The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

**7.4.2.2** The EUT was adjusted to produce maximum available to end user RF output power.

**7.4.2.3** The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

**7.4.2.4** The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.


**7.4.2.5** The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.4.2 and the associated plots.



HERMON LABORATORIES

<b>Test specification:</b>		<b>FCC section 15.247(e), Peak power density</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(d)	
<b>Test mode:</b>	Compliance	<b>Verdict:</b> PASS	
<b>Date:</b>	1/3/2011		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 42 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Figure 7.4.1 Setup for carrier field strength measurements

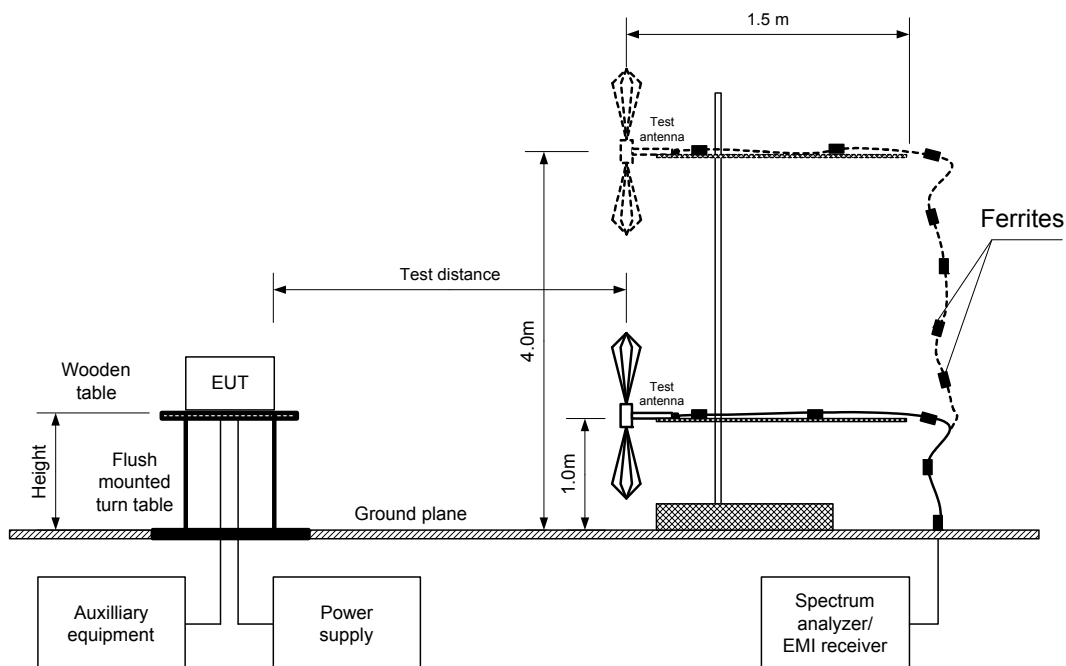



HERMON LABORATORIES

Test specification:	FCC section 15.247(e), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date:	1/3/2011		
Temperature: 23 °C	Air Pressure: 1017 hPa	Relative Humidity: 42 %	Power Supply: 3.7 VDC
Remarks:			

Table 7.4.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY RANGE: 2400 – 2483.5 MHz  
 TEST DISTANCE: 3 m  
 SUBSTITUTION ANTENNA HEIGHT: 0.8 m  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 3 kHz  
 VIDEO BANDWIDTH: 10 kHz  
 SUBSTITUTION ANTENNA TYPE: Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB**	Verdict
2401.000	89.9	V	1.10	48	-2.3	103.2	-11.0	Pass
2441.000	90.1	V	1.10	48	-2.3	103.2	-10.8	Pass
2482.000	89.3	V	1.10	48	-2.3	103.2	-11.6	Pass

\*- EUT front panel refer to 0 degrees position of turntable.

\*\*- Margin = Field strength - EUT antenna gain - calculated field strength limit.


**Reference numbers of test equipment used**

HL 1984	HL 2432	HL 2870	HL 3818	HL 3901			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.

<b>Test specification:</b>		<b>FCC section 15.247(e), Peak power density</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(d)	
<b>Test mode:</b>		Compliance	<b>Verdict:</b> PASS
<b>Date:</b>		1/3/2011	
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 42 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Plot 7.4.1 Peak spectral power density at low frequency 2401 MHz within 6 dB band

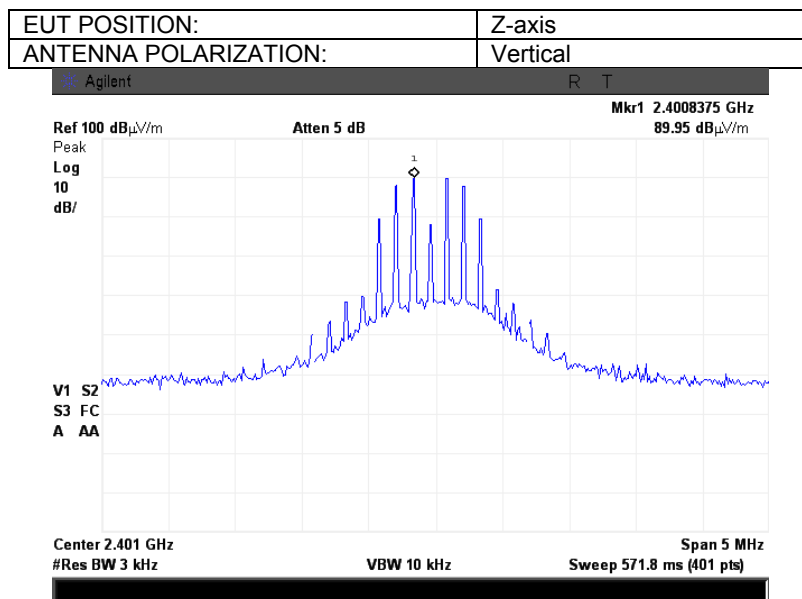

Plot 7.4.2 Peak spectral power density at low frequency 2401 MHz zoomed at the peak

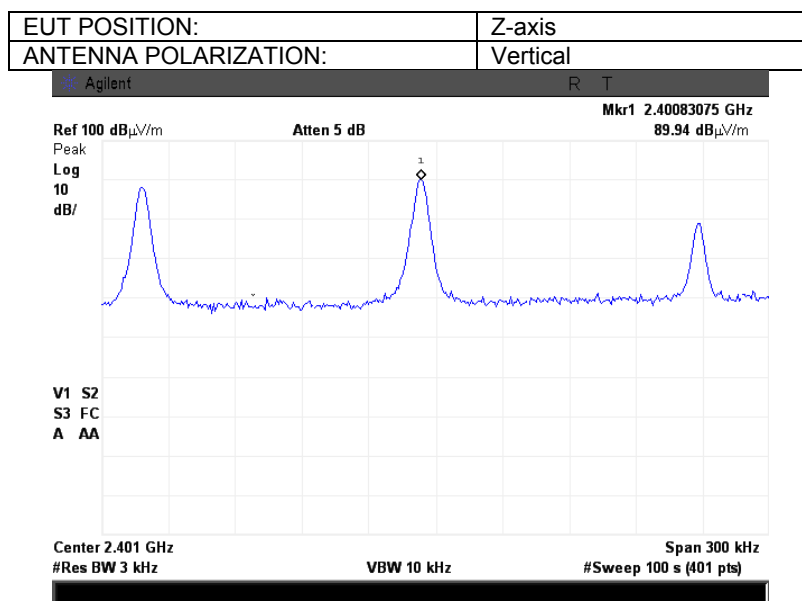





HERMON LABORATORIES

Test specification:		FCC section 15.247(e), Peak power density	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(d)	
Test mode:		Compliance	Verdict: PASS
Date:		1/3/2011	
Temperature: 23 °C	Air Pressure: 1017 hPa	Relative Humidity: 42 %	Power Supply: 3.7 VDC
Remarks:			

Plot 7.4.3 Peak spectral power density at mid frequency 2441 MHz within 6 dB band

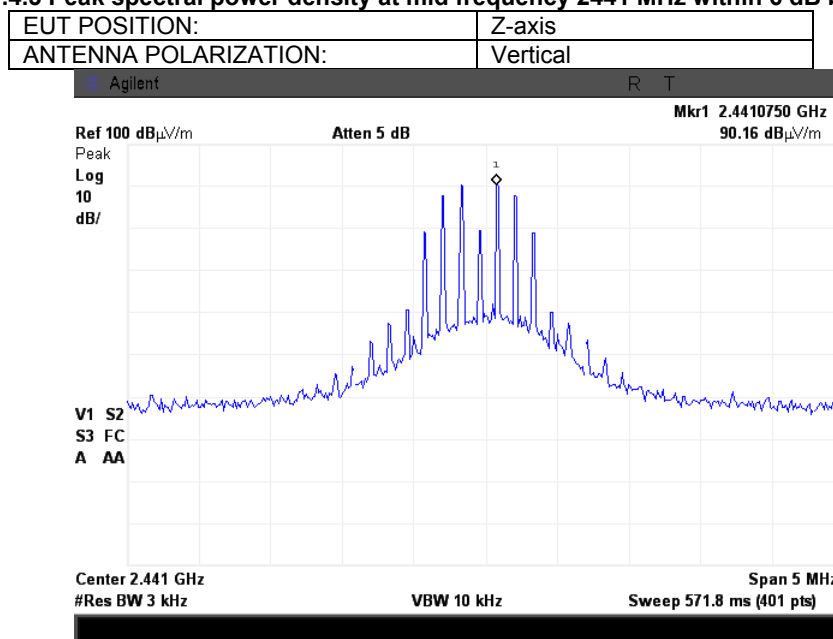


Plot 7.4.4 Peak spectral power density at mid frequency 2441 MHz zoomed at the peak

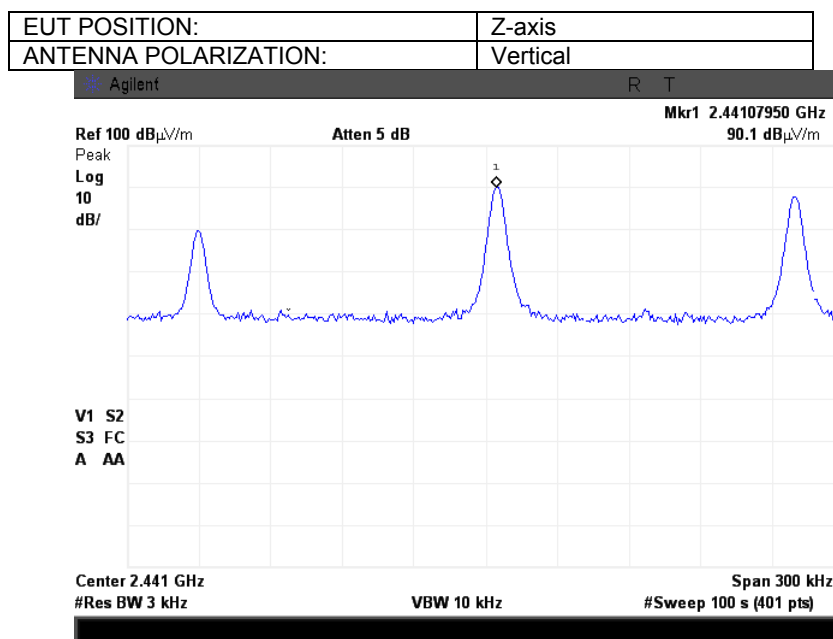


<b>Test specification:</b> FCC section 15.247(e), Peak power density			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(d)			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date:</b> 1/3/2011			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 42 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Plot 7.4.5 Peak spectral power density at high frequency 2482 MHz within 6 dB band

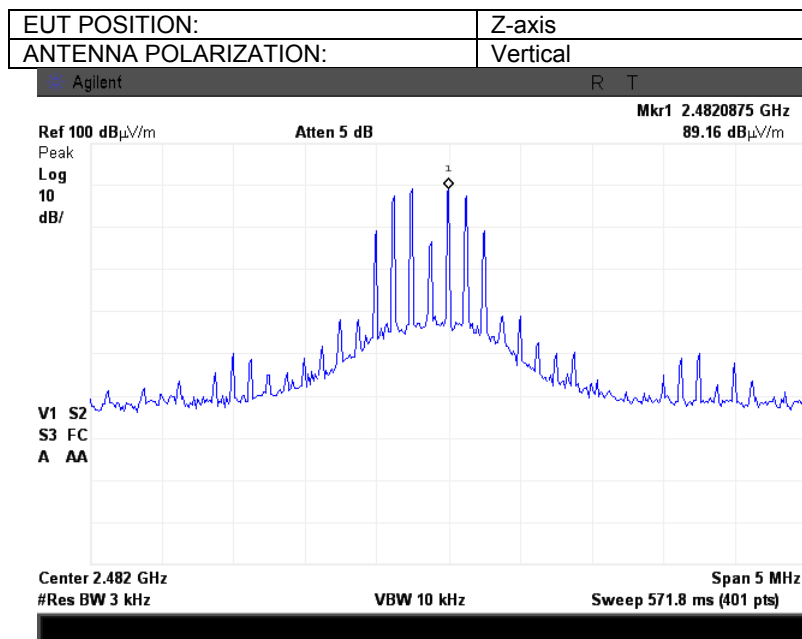


Plot 7.4.6 Peak spectral power density at high frequency 2482 MHz zoomed at the peak

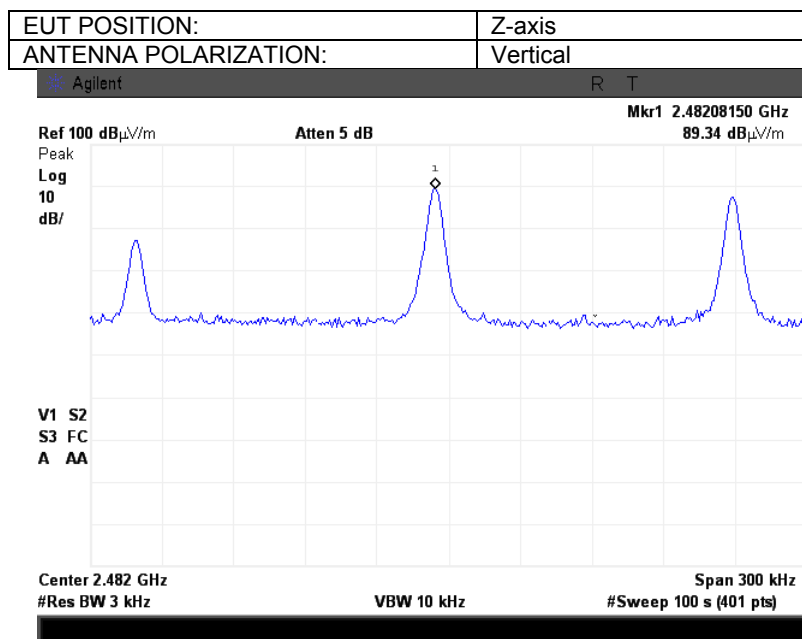


<b>Test specification:</b> FCC section 15.247(e), Peak power density			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(d)			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date:</b> 1/3/2011			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1017 hPa	<b>Relative Humidity:</b> 42 %	<b>Power Supply:</b> 3.7 VDC
<b>Remarks:</b>			

Plot 7.4.7 Peak spectral power density at high frequency 2483 MHz within 6 dB band

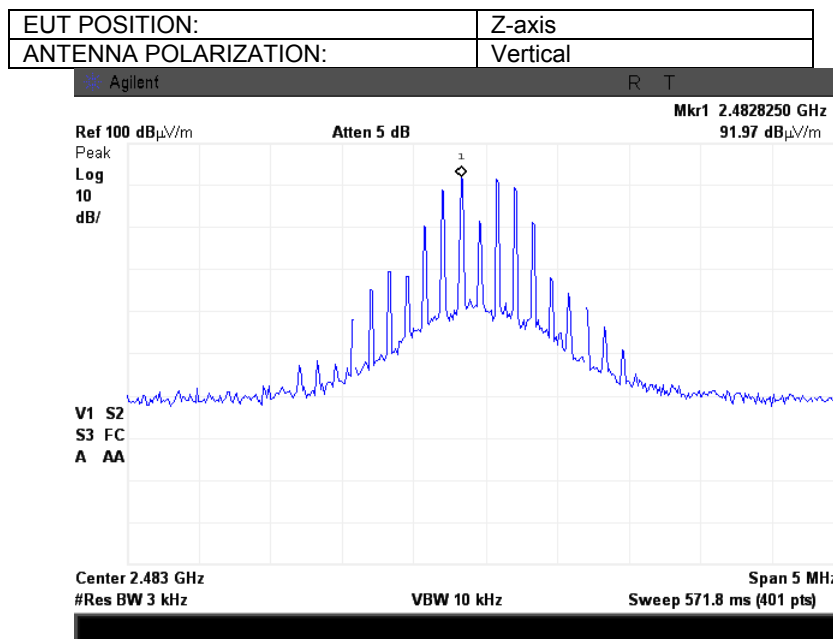

Plot 7.4.8 Peak spectral power density at high frequency 2482 MHz zoomed at the peak

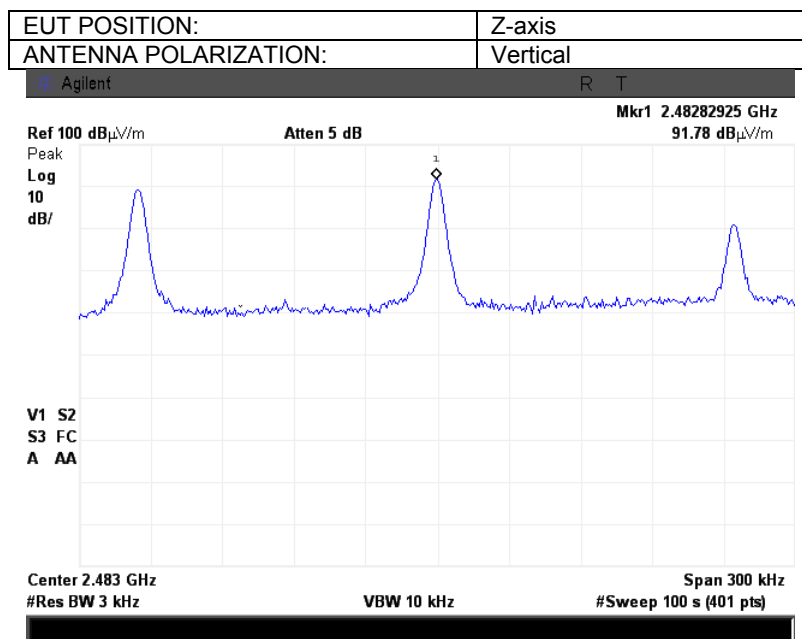

<b>Test specification:</b> FCC section 15.207(a), Conducted emission	
<b>Test procedure:</b> ANSI C63.4, Section 13.1.3	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date:</b> 1/5/2011	
<b>Temperature:</b> 24 °C	<b>Air Pressure:</b> 1014 hPa
	<b>Relative Humidity:</b> 49 %
	<b>Power Supply:</b> 120 VAC
<b>Remarks:</b>	

## 7.5 Conducted emissions

### 7.5.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

\* - The limit decreases linearly with the logarithm of frequency.

### 7.5.2 Test procedure


**7.5.2.1** The EUT was set up as shown in Figure 7.5.1 and associated photographs, energized and the performance check was conducted.

**7.5.2.2** The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer while unused coaxial connector of the LISN was terminated with 50 Ohm.

**7.5.2.3** The position of the device cables was varied to determine maximum emission level.

**7.5.2.4** The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.

Figure 7.5.1 Setup for conducted emission measurements, table-top equipment

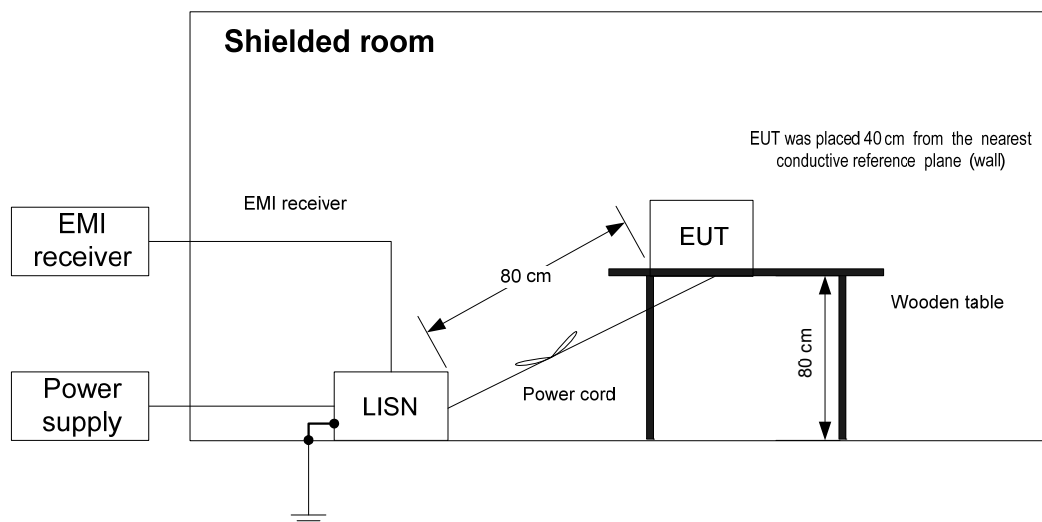





HERMON LABORATORIES

Test specification:		FCC section 15.207(a), Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Verdict: PASS	
Compliance			
Date:		1/5/2011	
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: 120 VAC
Remarks:			

Table 7.5.2 Conducted emission test results

LINE: AC power  
 EUT SET UP: TABLE-TOP  
 TEST SITE: SHIELDED ROOM  
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE  
 FREQUENCY RANGE: 150 kHz - 30 MHz  
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.272035	60.61	42.96	61.12	-18.16	4.94	51.12	-46.18	L1	Pass
0.395380	56.17	37.18	57.96	-20.78	5.09	47.96	-42.87		
0.432738	50.58	36.46	57.26	-20.80	6.91	47.26	-40.35		
0.737903	44.91	29.66	56.00	-26.34	21.98	46.00	-24.02		
0.520000	47.13	29.73	56.00	-26.27	31.91	46.00	-14.09	L2	Pass
0.815340	36.61	22.36	56.00	-33.64	7.68	46.00	-38.32		
5.116680	34.04	25.37	60.00	-34.63	13.78	50.00	-36.22		

\*- Margin = Measured emission - specification limit.

## Reference numbers of test equipment used

HL 0447	HL 0495	HL 0787	HL 1425	HL 1513	HL 3612		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:		FCC section 15.207(a), Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Compliance	Verdict: PASS
Date:		1/5/2011	
Temperature: 24 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.1 Conducted emission measurements

LINE: L1  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 270 kHz  
60.03 dBμV

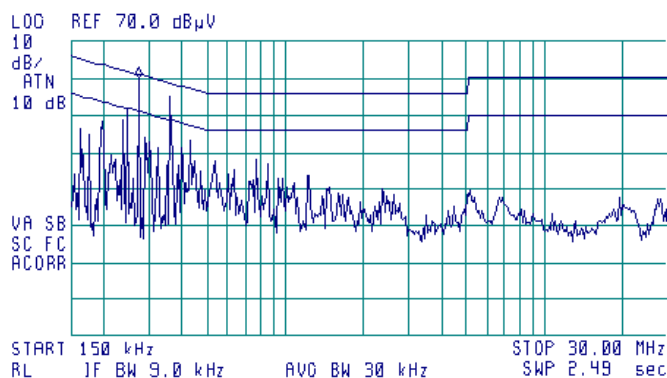


Plot 7.5.2 Conducted emission measurements

LINE: L2  
EUT OPERATING MODE: Transmit  
LIMIT: QUASI-PEAK, AVERAGE  
DETECTOR: PEAK



ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 520 kHz  
42.49 dBμV

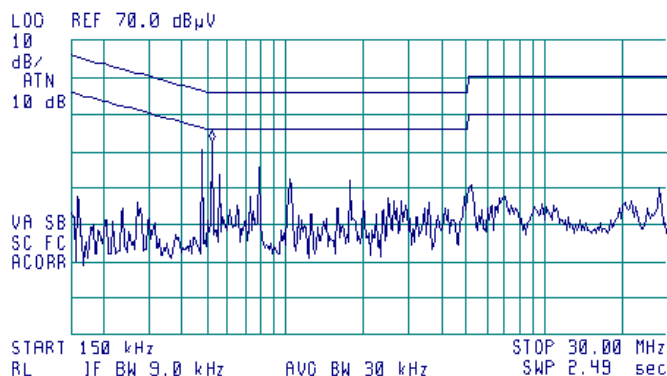

## 8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.*	Due Cal.*
0446	Antenna, Loop, Active, 10 kHz – 30 MHz	EMCO	6502	2857	29-Jun-10	29-Jun-11
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 Uh + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 – 1	066	26-Oct-10	26-Oct-11
0495	Autotransformer 0-255V, 10A	Variac	EMPL01	495	30-Dec-10	30-Dec-11
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	25-Aug-10	25-Aug-11
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 – 2000 MHz	EMCO	3141	9611-1011	11-Jan-11	11-Jan-12
0661	Generator Swept Signal, 10 MHz to 40 GHz, + 10 dBm	HP	83640B	3614A002 66	17-Dec-10	17-Dec-11
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	18-Oct-10	18-Oct-11
1425	EMI Receiver, 9 kHz – 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	24-Aug-10	24-Aug-11
1446	Damped sinusoidal voltage generator	Hermon Laboratories	RTCA-160c	211	30-Dec-10	30-Dec-11
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	01-Sep-10	01-Sep-11
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	11-Jun-10	11-Jun-11
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	11-Jun-10	11-Jun-11
2870	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA	Huber-Suhner	198-9155-00	2870	14-Sep-10	14-Sep-11
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA	Huber-Suhner	198-8155-00	2871	14-Sep-10	14-Sep-11
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	07-May-10	07-May-11
3533	Amplifier, low noise, 6 to 18 GHz	Quinstar Technology	QLJ-06184040-J0	111590010 01	23-Dec-10	23-Dec-11
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	01-Dec-10	01-Dec-11
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	26-Sep-10	26-Sep-11
3883	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type (f) in, N-type (m) out.	Agilent Technologies	87405C	MY470104 06	13-Jan-11	13-Jan-12
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	07-Feb-11	07-Feb-12

\*Calibration was valid at the testing time.

## 9 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization  Vertical polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

## 10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 11 APPENDIX D Specification references

FCC 47CFR part 15: 2010	Radio Frequency Devices
FR Vol.62	Federal Register, Volume 62, May 13, 1997
558074 D01 DTS Meas Guidance v01, 1/18/2012	FCC Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

## 12 APPENDIX E Test equipment correction factors

**Correction factor**  
**Line impedance stabilization network**  
**Model LISN 16 - 1**  
**Hermon Laboratories, HL 0447**

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.

**Antenna factor**  
**Active loop antenna**  
**Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor**  
**Double-ridged guide horn antenna**  
**Model 3115, serial number: 00027177, HL 2432**

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Cable loss**  
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-9155-00,  
HL 2870

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	5750	2.49	12000	3.71
30	0.17	6000	2.53	12250	3.81
100	0.32	6250	2.58	12500	3.84
250	0.49	6500	2.64	12750	3.88
500	0.70	6750	2.69	13000	3.92
750	0.86	7000	2.75	13250	3.96
1000	1.00	7250	2.80	13500	3.98
1250	1.11	7500	2.87	13750	4.01
1500	1.23	7750	2.93	14000	4.03
1750	1.34	8000	2.94	14250	4.09
2000	1.41	8250	3.00	14500	4.08
2250	1.51	8500	3.04	14750	4.10
2500	1.59	8750	3.08	15000	4.15
2750	1.68	9000	3.14	15250	4.22
3000	1.76	9250	3.16	15500	4.31
3250	1.83	9500	3.22	15750	4.42
3500	1.91	9750	3.26	16000	4.48
3750	1.97	10000	3.36	16250	4.54
4000	2.05	10250	3.41	16500	4.56
4250	2.11	10500	3.46	16750	4.57
4500	2.18	10750	3.50	17000	4.59
4750	2.24	11000	3.54	17250	4.66
5000	2.30	11250	3.58	17500	4.70
5250	2.36	11500	3.63	17750	4.76
5500	2.43	11750	3.66	18000	4.72

**Cable loss**  
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,  
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

**Cable loss**  
**Cable coaxial, RG-214/U, N type-N type, 17 m**  
**Teldor, HL 3612**

Frequency, MHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79

**Cable loss**  
**Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A**  
**HL 3901**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52

## 13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
$\Omega$	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT