


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	37	6135	6135	-64.78	-2.28	0	-62.5	-62	OFF
					-65.28	-2.28	0	-63	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
	160	47	6185	6110	-69.07	-2.28	0	-66.79	-62	OFF
					-69.57	-2.28	0	-67.29	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
				6185	-67.08	-2.28	0	-64.8	-62	OFF
					-67.58	-2.28	0	-65.3	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
				6260	-67.02	-2.28	0	-64.74	-62	OFF
					-67.52	-2.28	0	-65.24	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6135	v	v	v	v	v	v	v	x	v	v	90%	90%	Pass
	160	6110	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
		6185	v	v	v	v	v	v	v	v	x	v	90%	90%	Pass
		6260	v	v	v	v	v	v	x	v	v	v	90%	90%	Pass


Plots of EUT Tx waveform

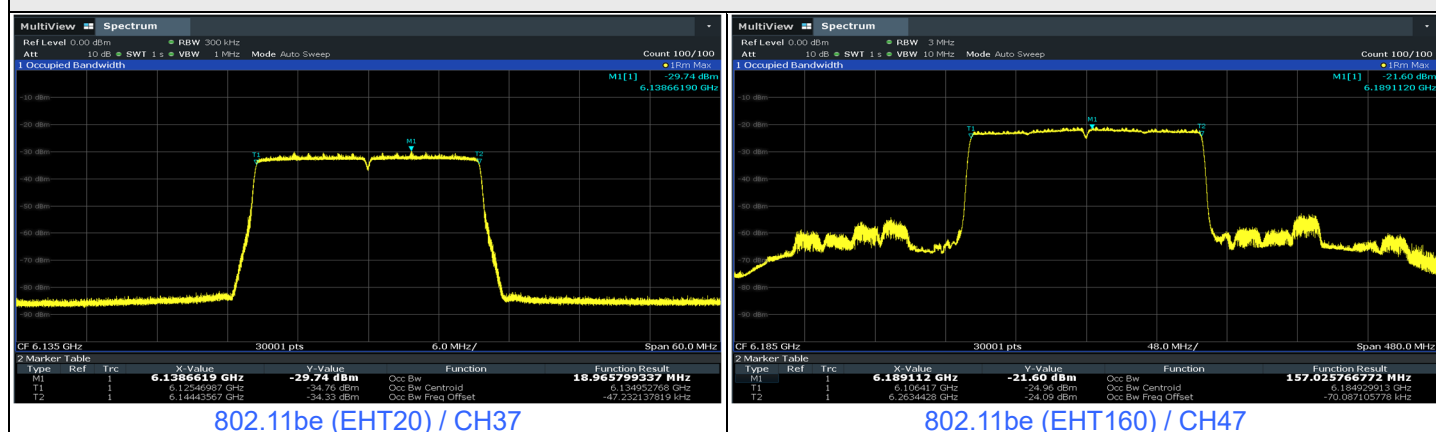


Plots of Injected signal (AWGN) level

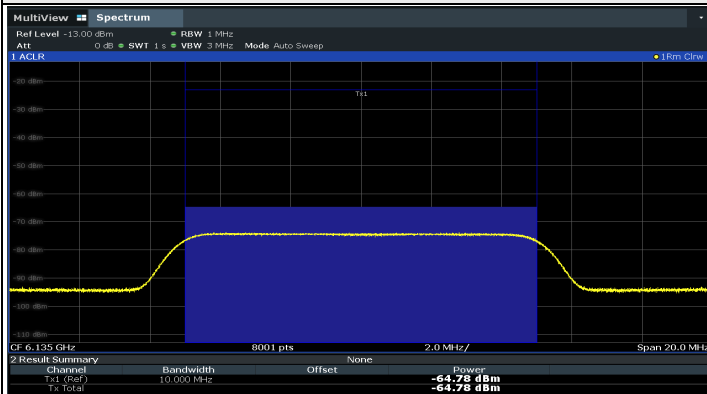


802.11be (EHT20) / CH37

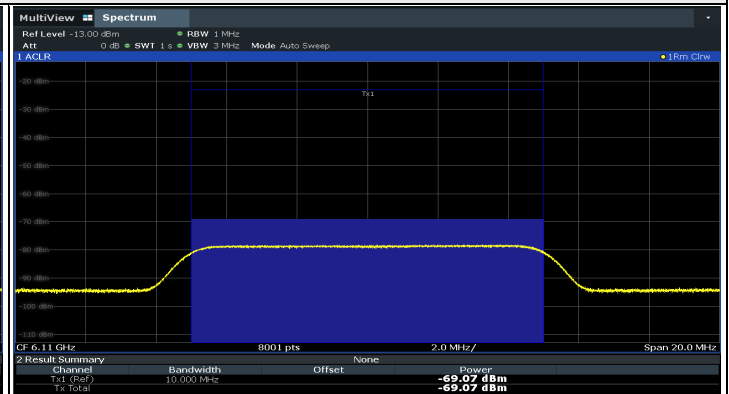

802.11be (EHT160) / CH47(Low Edge)

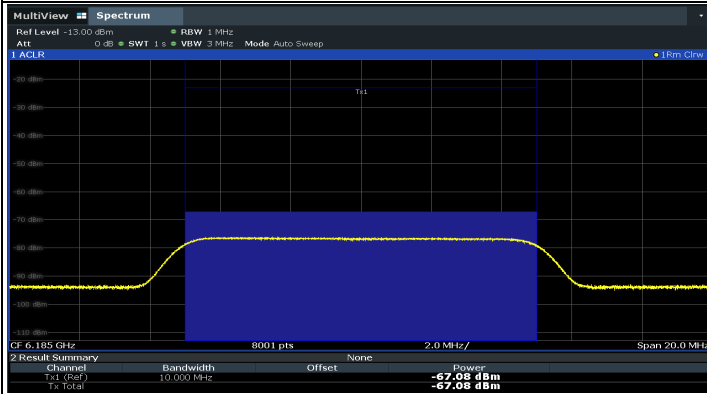


802.11be (EHT160) / CH47(Middle)

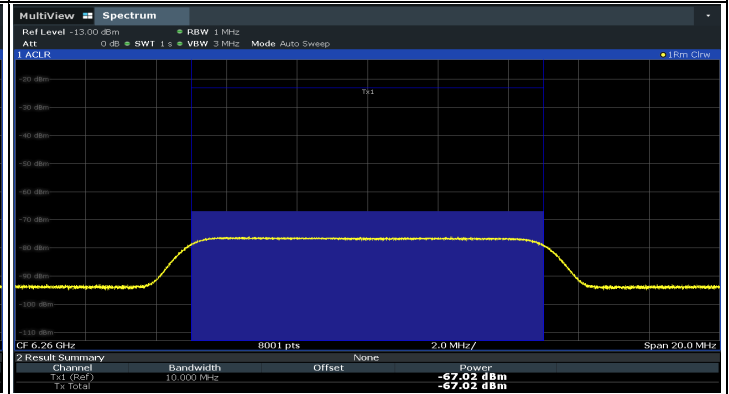

802.11be (EHT160) / CH47(High Edge)

Plots of EUT ceased transmission in the time domain


UNI15_20M_6135_Test Result

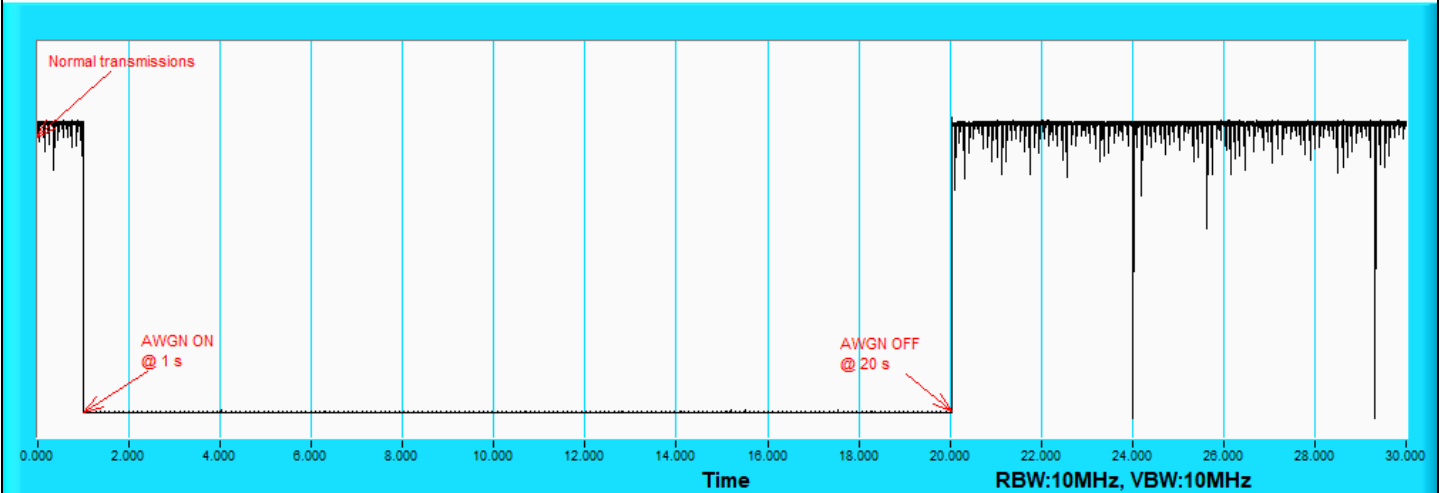


802.11be (EHT20) / CH37

Plots of EUT ceased transmission in the time domain


UNII5_160M_6110_Test Result

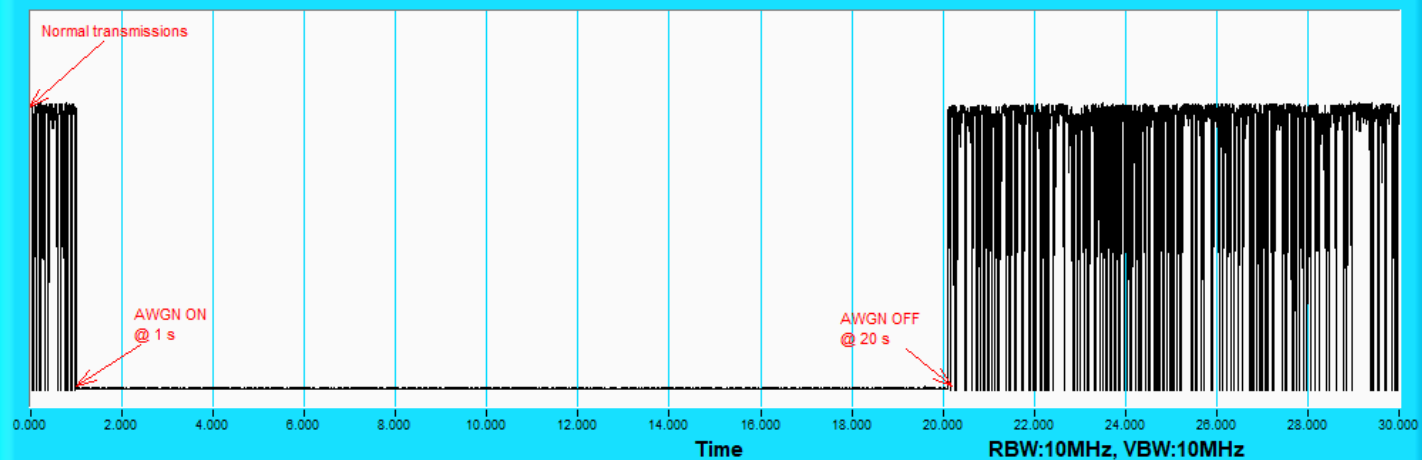

UNII5_160M_6185_Test Result

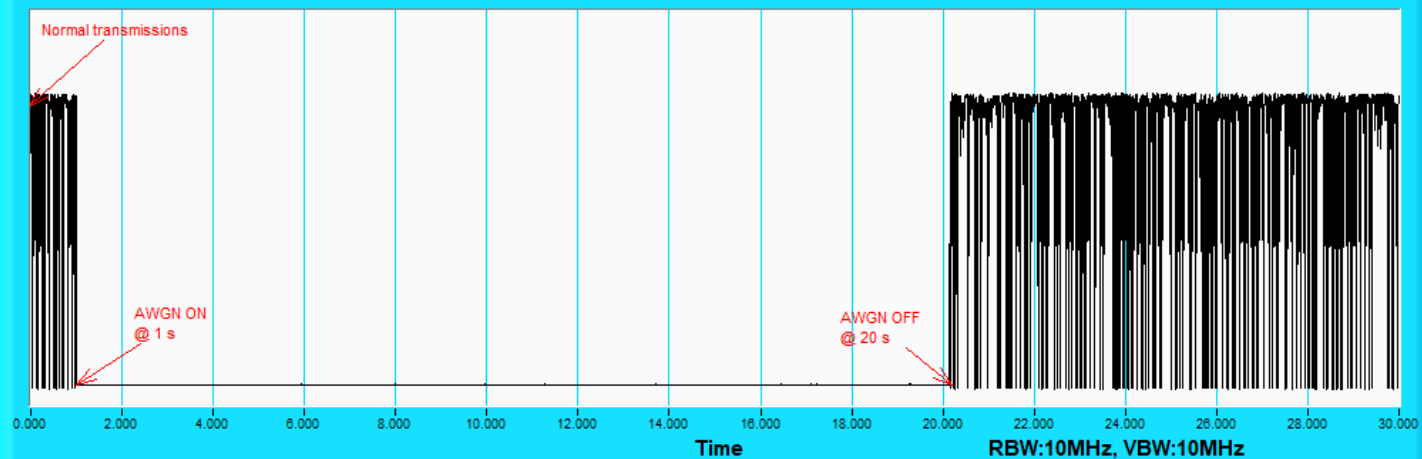

UNII5_160M_6260_Test Result

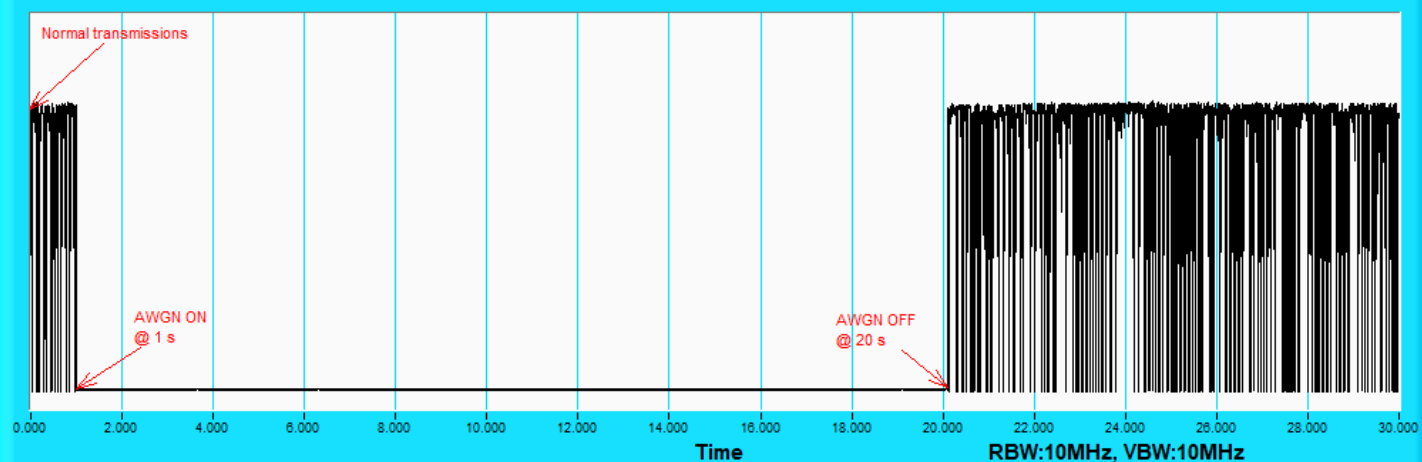

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	133	6615	6615	-67.28	-2.28	0	-65	-62	OFF
					-67.78	-2.28	0	-65.5	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
	160	143	6590	6590	-71.51	-2.28	0	-69.23	-62	OFF
					-72.01	-2.28	0	-69.73	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
			6665	6665	-69.02	-2.28	0	-66.74	-62	OFF
					-69.52	-2.28	0	-67.24	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
			6740	6740	-72.48	-2.28	0	-70.2	-62	OFF
					-72.98	-2.28	0	-70.7	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6615	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6590	v	v	v	v	v	v	v	x	v	v	90%	90%	Pass
		6665	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass


Plots of EUT Tx waveform

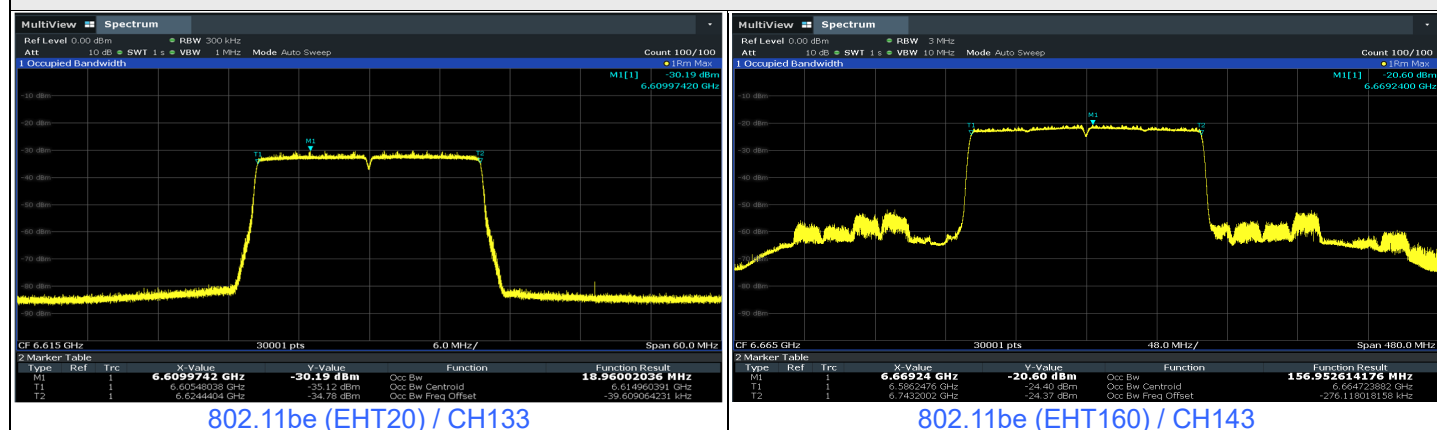


Plots of Injected signal (AWGN) level

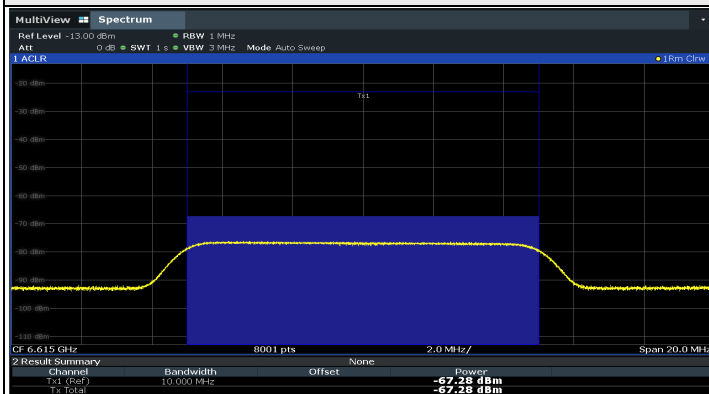


802.11be (EHT20) / CH133

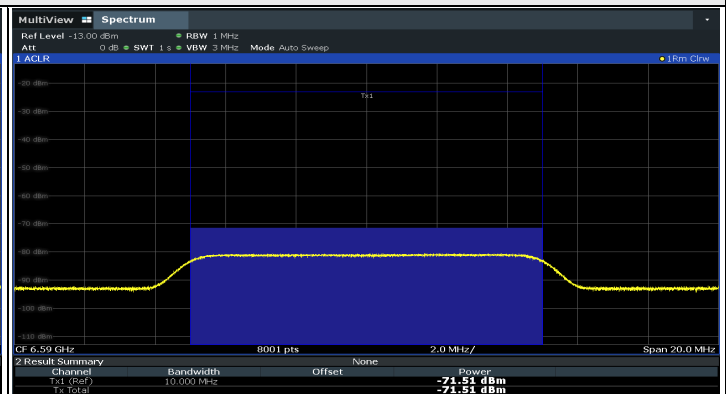

802.11be (EHT160) / CH143(Low Edge)

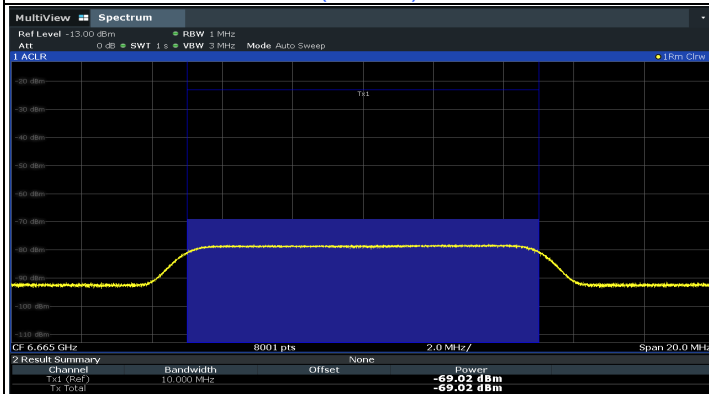


802.11be (EHT160) / CH143(Middle)

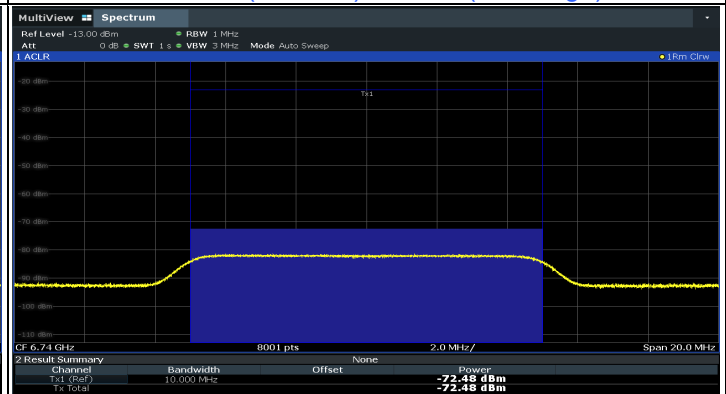

802.11be (EHT160) / CH143(High Edge)

Plots of EUT ceased transmission in the time domain


UNI17_20M_6615_Test Result

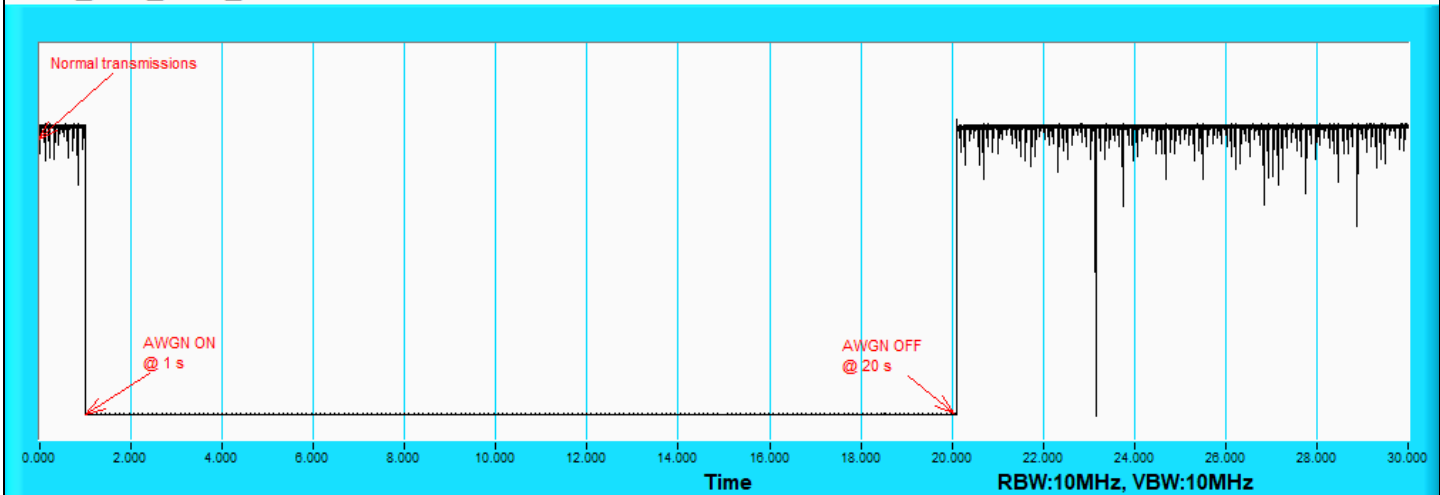

802.11be (EHT20) / CH133


Plots of EUT ceased transmission in the time domain

UNII7_160M_6590_Test Result

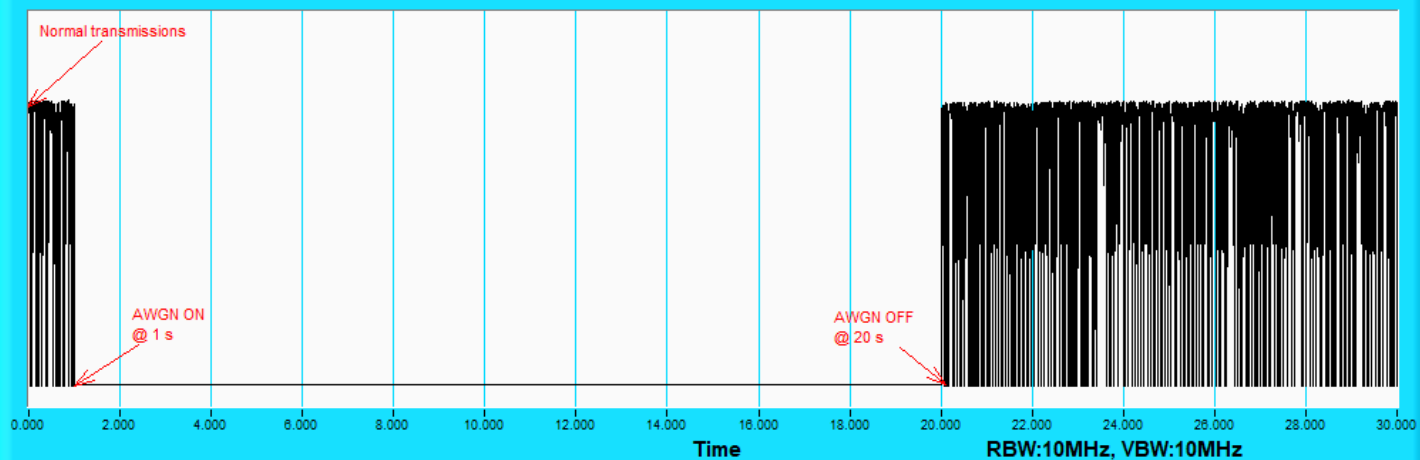


802.11be (EHT160) / CH143(Low Edge)

UNII7_160M_6665_Test Result

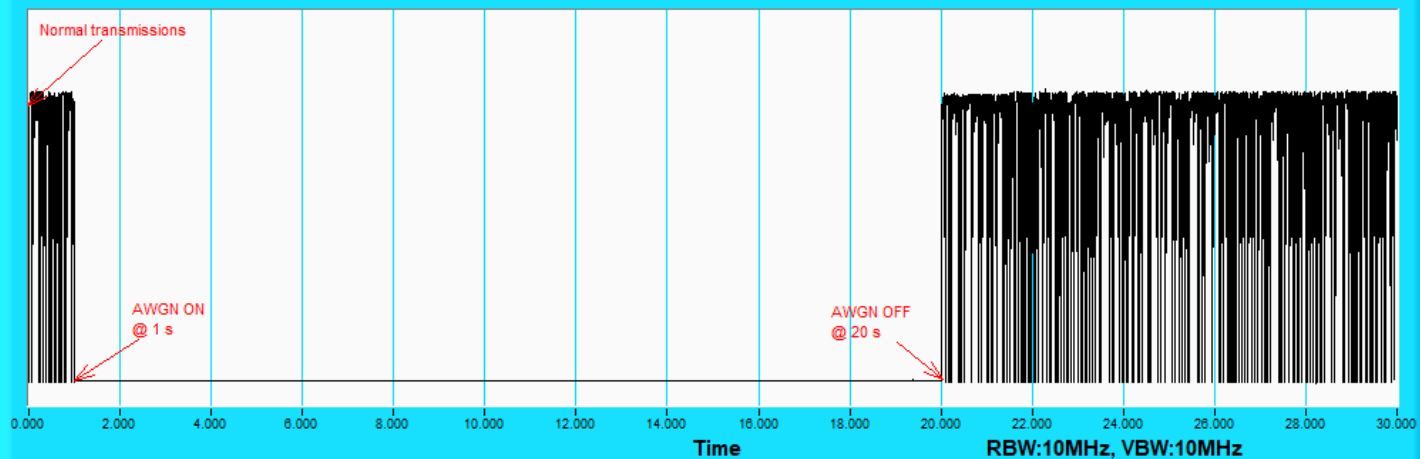

802.11be (EHT160) / CH143(Middle)

UNII7_160M_6740_Test Result

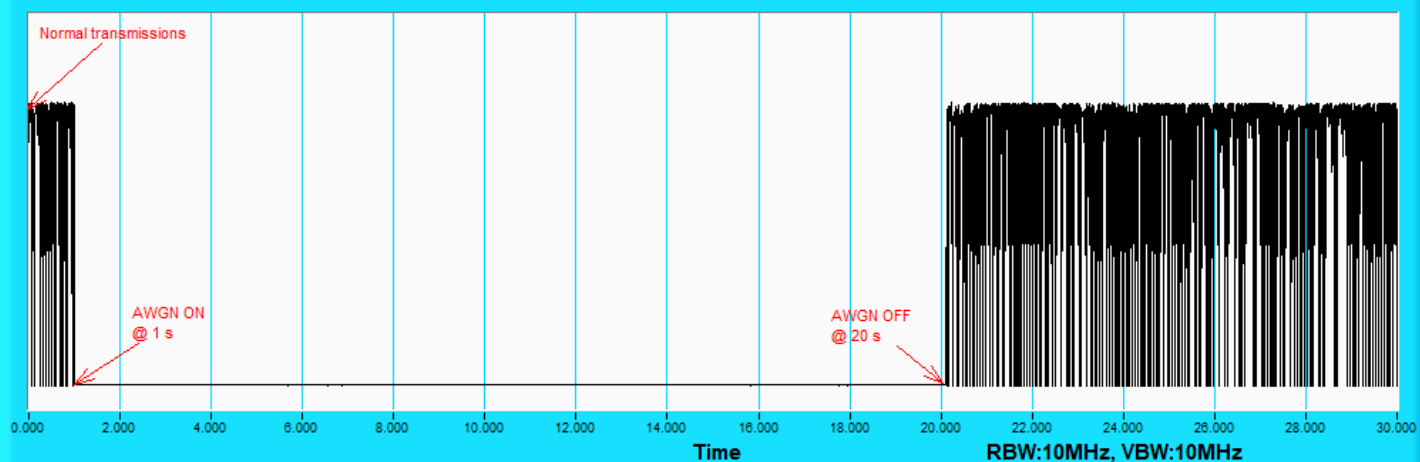

802.11be (EHT160) / CH143(High Edge)

7.7 AC Power Conducted Emissions


Mode A

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27 °C, 68 % RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.02	32.39	19.05	42.41	29.07	65.79	55.79	-23.38	-26.72
2	0.48578	10.03	28.81	23.23	38.84	33.26	56.24	46.24	-17.40	-12.98
3	1.03575	10.06	21.50	16.08	31.56	26.14	56.00	46.00	-24.44	-19.86
4	2.85938	10.14	29.16	23.00	39.30	33.14	56.00	46.00	-16.70	-12.86
5	5.76563	10.29	23.43	18.00	33.72	28.29	60.00	50.00	-26.28	-21.71
6	21.21875	11.12	20.70	15.26	31.82	26.38	60.00	50.00	-28.18	-23.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

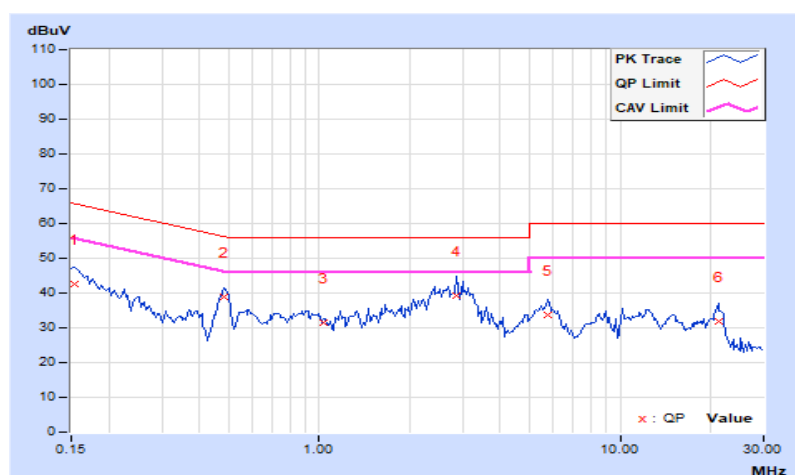


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27 °C, 68 % RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.00	33.06	19.52	43.06	29.52	66.00	56.00	-22.94	-26.48
2	0.23203	10.01	25.85	15.71	35.86	25.72	62.38	52.38	-26.52	-26.66
3	0.49766	10.01	26.60	21.56	36.61	31.57	56.04	46.04	-19.43	-14.47
4	2.69141	10.10	27.09	21.11	37.19	31.21	56.00	46.00	-18.81	-14.79
5	6.25000	10.25	18.58	10.25	28.83	20.50	60.00	50.00	-31.17	-29.50
6	12.28516	10.50	20.18	12.66	30.68	23.16	60.00	50.00	-29.32	-26.84
7	21.54688	10.83	18.54	12.73	29.37	23.56	60.00	50.00	-30.63	-26.44

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

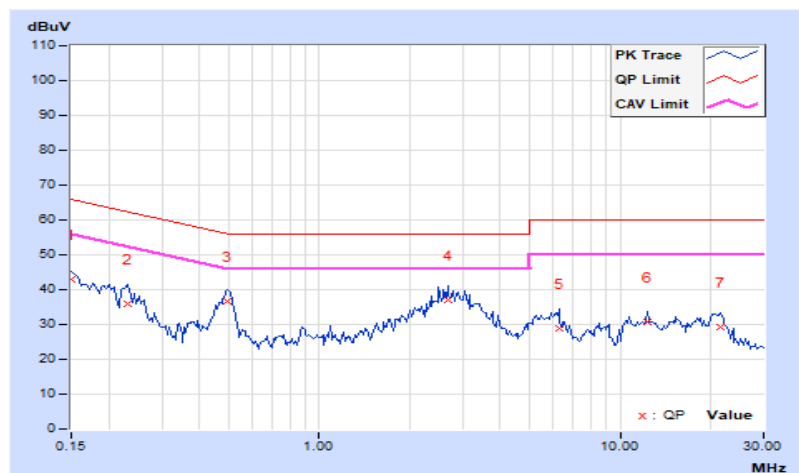


Mode B

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27 °C, 68 % RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.02	31.75	18.57	41.77	28.59	65.58	55.58	-23.81	-26.99
2	0.49375	10.03	28.55	23.72	38.58	33.75	56.10	46.10	-17.52	-12.35
3	2.71094	10.13	29.31	23.26	39.44	33.39	56.00	46.00	-16.56	-12.61
4	5.80859	10.29	23.15	17.29	33.44	27.58	60.00	50.00	-26.56	-22.42
5	12.20313	10.64	22.55	16.38	33.19	27.02	60.00	50.00	-26.81	-22.98
6	21.32422	11.12	20.81	15.24	31.93	26.36	60.00	50.00	-28.07	-23.64

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

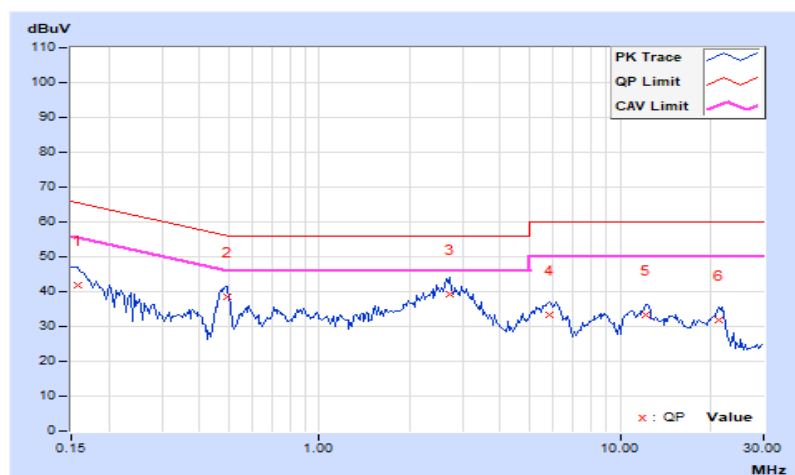


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27 °C, 68 % RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.00	30.58	18.46	40.58	28.46	66.00	56.00	-25.42	-27.54
2	0.22031	10.01	24.23	16.11	34.24	26.12	62.81	52.81	-28.57	-26.69
3	0.49375	10.01	26.53	21.32	36.54	31.33	56.10	46.10	-19.56	-14.77
4	2.97266	10.11	26.44	20.30	36.55	30.41	56.00	46.00	-19.45	-15.59
5	5.67969	10.23	20.04	15.78	30.27	26.01	60.00	50.00	-29.73	-23.99
6	12.35938	10.50	19.71	15.91	30.21	26.41	60.00	50.00	-29.79	-23.59

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

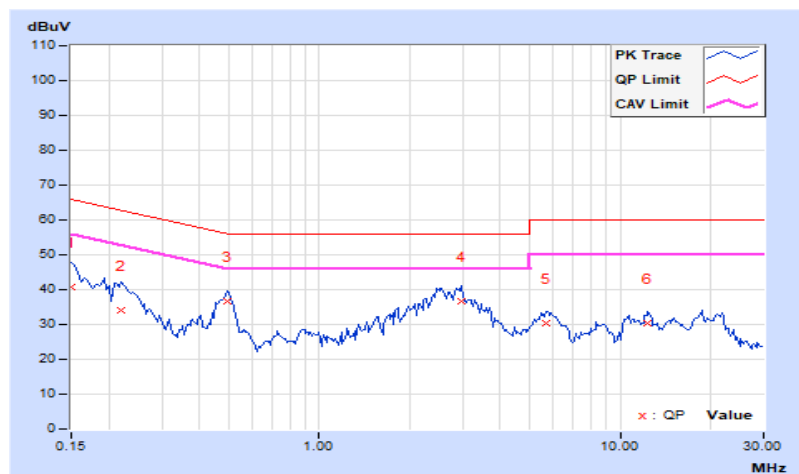


Mode C

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27 °C, 68 % RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.02	31.65	18.49	41.67	28.51	65.58	55.58	-23.91	-27.07
2	0.48984	10.03	28.81	23.66	38.84	33.69	56.17	46.17	-17.33	-12.48
3	2.76172	10.13	28.71	23.11	38.84	33.24	56.00	46.00	-17.16	-12.76
4	6.12109	10.31	21.81	15.05	32.12	25.36	60.00	50.00	-27.88	-24.64
5	12.47266	10.65	22.25	15.22	32.90	25.87	60.00	50.00	-27.10	-24.13
6	21.59766	11.14	20.82	15.17	31.96	26.31	60.00	50.00	-28.04	-23.69

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

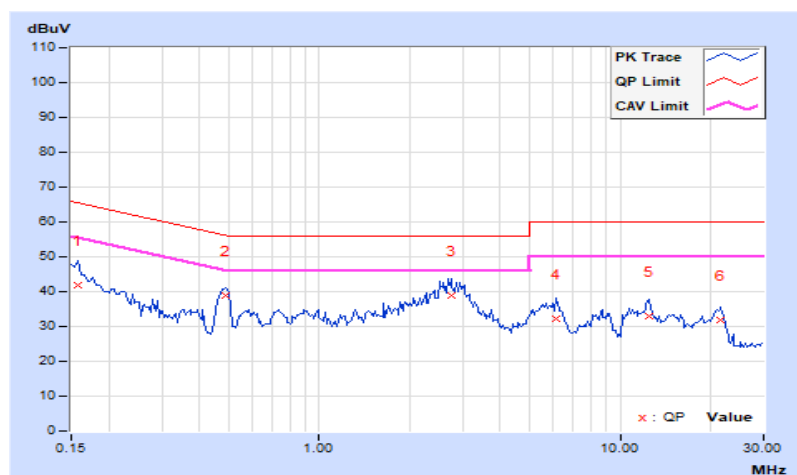


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	27 °C, 68 % RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	10.01	29.81	14.39	39.82	24.40	65.18	55.18	-25.36	-30.78
2	0.23203	10.01	26.06	15.37	36.07	25.38	62.38	52.38	-26.31	-27.00
3	0.49766	10.01	26.47	21.65	36.48	31.66	56.04	46.04	-19.56	-14.38
4	0.87266	10.03	13.16	6.60	23.19	16.63	56.00	46.00	-32.81	-29.37
5	2.67969	10.10	26.99	21.19	37.09	31.29	56.00	46.00	-18.91	-14.71
6	5.96484	10.24	19.72	12.78	29.96	23.02	60.00	50.00	-30.04	-26.98
7	21.86719	10.84	18.51	12.22	29.35	23.06	60.00	50.00	-30.65	-26.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

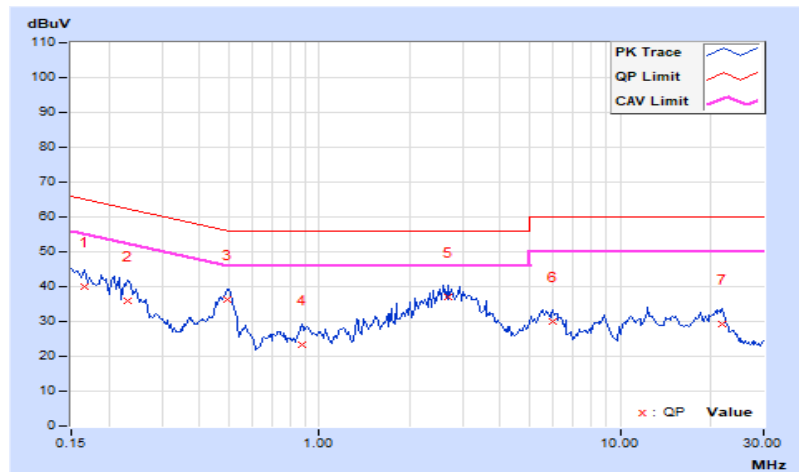

7.8 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	97.70	32.9 QP	43.5	-10.6	1.28 H	265	50.6	-17.7
2	144.10	37.8 QP	43.5	-5.7	2.13 H	298	50.6	-12.8
3	301.00	39.4 QP	46.0	-6.6	1.91 H	221	51.6	-12.2
4	664.50	36.3 QP	46.0	-9.7	2.88 H	204	40.7	-4.4
5	697.00	34.3 QP	46.0	-11.7	1.08 H	141	38.0	-3.7
6	771.50	35.3 QP	46.0	-10.7	1.00 H	181	37.6	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

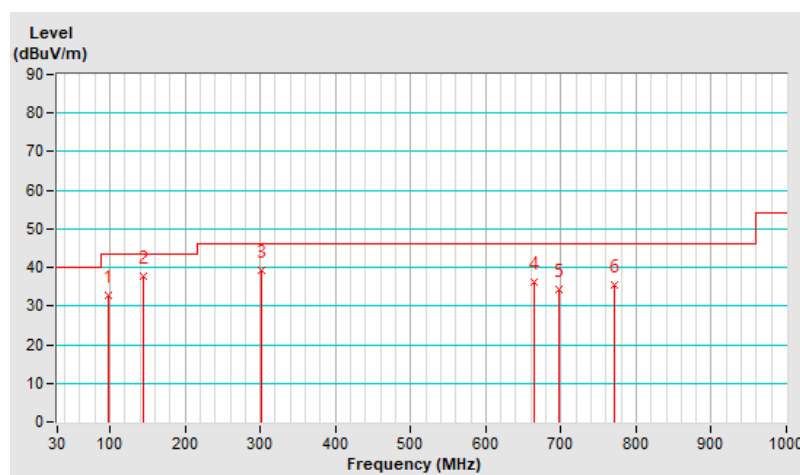


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	101.00	35.4 QP	43.5	-8.1	2.66 V	84	52.6	-17.2
2	175.70	31.4 QP	43.5	-12.1	2.47 V	92	45.0	-13.6
3	297.30	30.5 QP	46.0	-15.5	2.69 V	306	42.9	-12.4
4	431.30	29.6 QP	46.0	-16.4	1.58 V	301	38.5	-8.9
5	575.40	27.9 QP	46.0	-18.1	1.49 V	360	33.9	-6.0
6	667.10	36.7 QP	46.0	-9.3	1.31 V	255	41.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

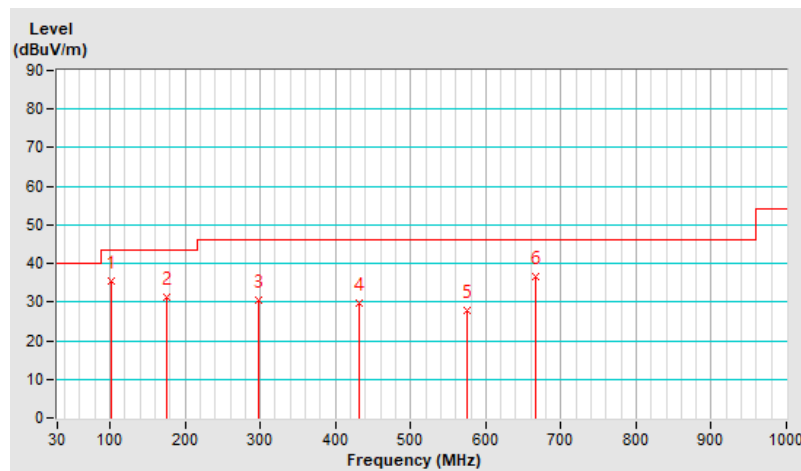


Mode B

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	97.80	33.1 QP	43.5	-10.4	1.28 H	275	50.8	-17.7
2	144.40	38.2 QP	43.5	-5.3	2.16 H	307	51.0	-12.8
3	301.40	39.8 QP	46.0	-6.2	1.88 H	227	51.9	-12.1
4	664.60	36.6 QP	46.0	-9.4	2.87 H	210	41.0	-4.4
5	697.20	34.2 QP	46.0	-11.8	1.02 H	129	37.9	-3.7
6	771.10	35.1 QP	46.0	-10.9	1.00 H	193	37.4	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

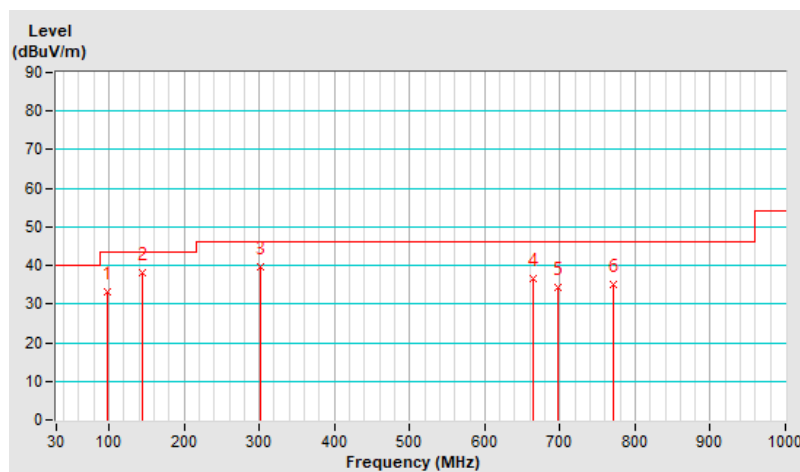


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	100.90	35.3 QP	43.5	-8.2	2.61 V	87	52.5	-17.2
2	175.70	31.4 QP	43.5	-12.1	2.41 V	87	45.0	-13.6
3	297.30	30.3 QP	46.0	-15.7	2.74 V	313	42.7	-12.4
4	431.20	29.5 QP	46.0	-16.5	1.54 V	314	38.4	-8.9
5	575.40	28.2 QP	46.0	-17.8	1.46 V	360	34.2	-6.0
6	667.30	36.7 QP	46.0	-9.3	1.32 V	251	41.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

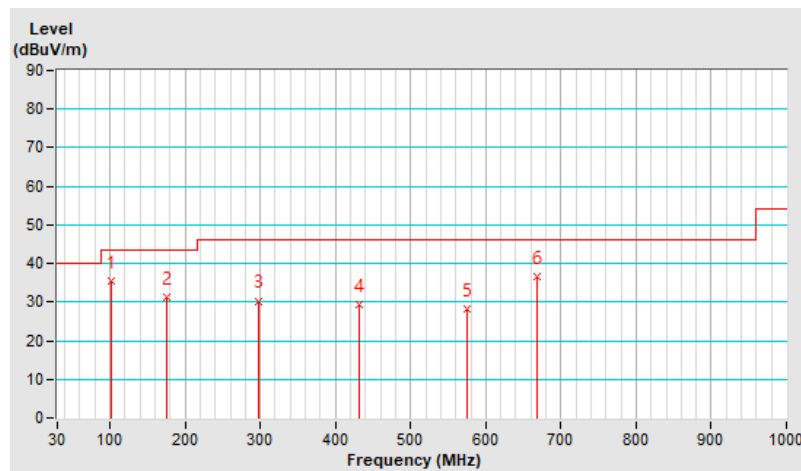


Mode C

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	98.10	33.3 QP	43.5	-10.2	1.33 H	255	50.9	-17.6
2	144.50	38.1 QP	43.5	-5.4	2.16 H	298	50.9	-12.8
3	301.00	39.5 QP	46.0	-6.5	1.88 H	213	51.7	-12.2
4	664.50	36.0 QP	46.0	-10.0	2.89 H	213	40.4	-4.4
5	696.80	34.1 QP	46.0	-11.9	1.12 H	134	37.8	-3.7
6	771.60	35.3 QP	46.0	-10.7	1.00 H	181	37.6	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

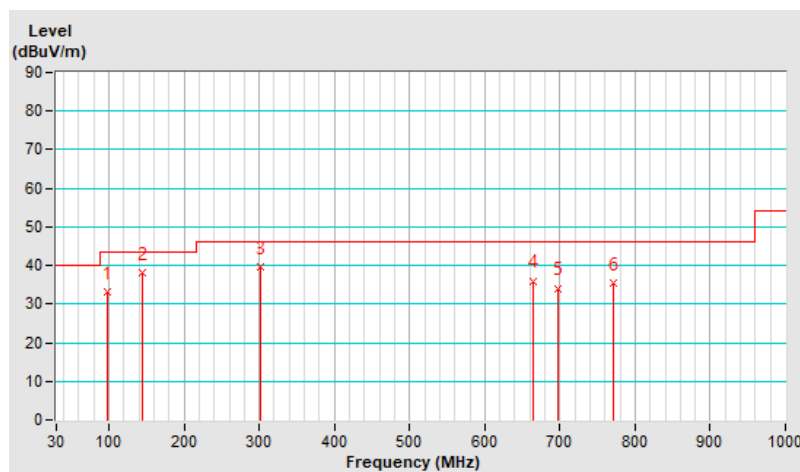


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	100.90	35.3 QP	43.5	-8.2	2.68 V	94	52.5	-17.2
2	175.50	31.2 QP	43.5	-12.3	2.50 V	81	44.7	-13.5
3	296.90	30.1 QP	46.0	-15.9	2.71 V	306	42.5	-12.4
4	430.70	29.0 QP	46.0	-17.0	1.60 V	302	37.9	-8.9
5	575.70	28.3 QP	46.0	-17.7	1.48 V	360	34.2	-5.9
6	667.10	36.4 QP	46.0	-9.6	1.29 V	253	40.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

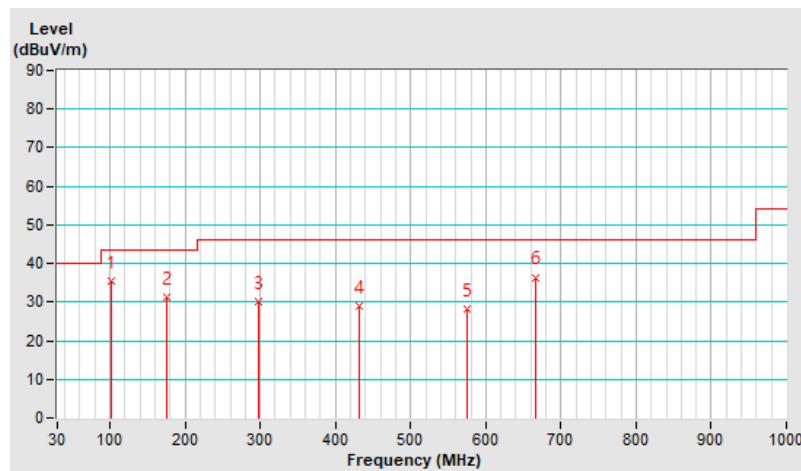

7.9 Unwanted Emissions above 1 GHz


Mode A_1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.82 H	184	45.6	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.82 H	184	34.2	5.6
3	*5955.00	94.2 PK			1.82 H	184	88.7	5.5
4	*5955.00	85.6 AV			1.82 H	184	80.1	5.5
5	11910.00	46.9 PK	74.0	-27.1	1.53 H	77	32.3	14.6
6	11910.00	35.0 AV	54.0	-19.0	1.53 H	77	20.4	14.6
7	17865.00	55.4 PK	74.0	-18.6	1.98 H	360	29.5	25.9
8	17865.00	46.5 AV	54.0	-7.5	1.98 H	360	20.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

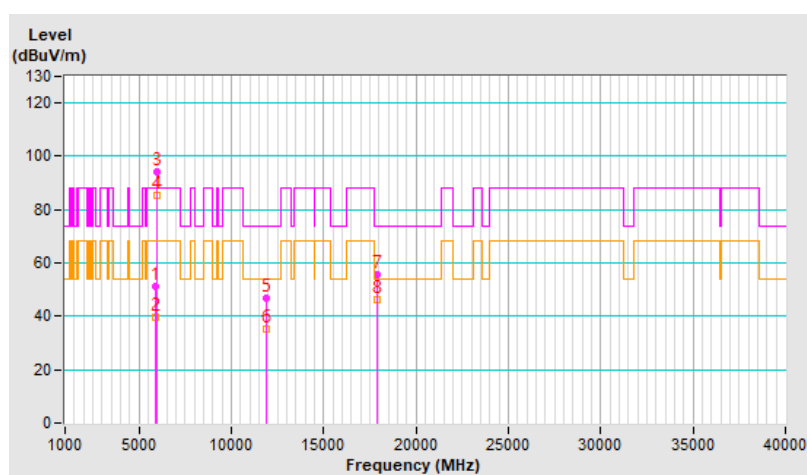


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.89 V	51	45.8	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.89 V	51	34.2	5.6
3	*5955.00	92.7 PK			1.89 V	51	87.2	5.5
4	*5955.00	84.5 AV			1.89 V	51	79.0	5.5
5	11910.00	47.1 PK	74.0	-26.9	1.00 V	265	32.5	14.6
6	11910.00	35.4 AV	54.0	-18.6	1.00 V	265	20.8	14.6
7	17865.00	56.4 PK	74.0	-17.6	2.19 V	158	30.5	25.9
8	17865.00	45.5 AV	54.0	-8.5	2.19 V	158	19.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

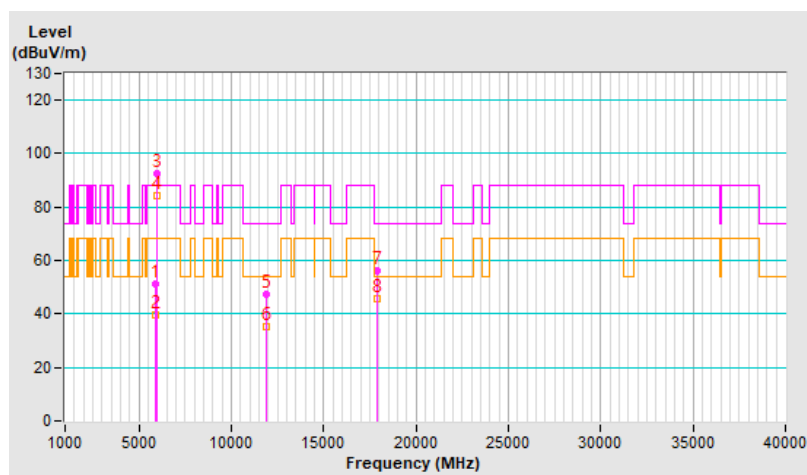


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	93.6 PK			1.85 H	178	87.8	5.8
2	*6195.00	85.2 AV			1.85 H	178	79.4	5.8
3	12390.00	47.1 PK	74.0	-26.9	1.53 H	78	32.4	14.7
4	12390.00	35.2 AV	54.0	-18.8	1.53 H	78	20.5	14.7
5	18585.00	55.2 PK	74.0	-18.8	1.90 H	360	60.7	-5.5
6	18585.00	46.4 AV	54.0	-7.6	1.90 H	360	51.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

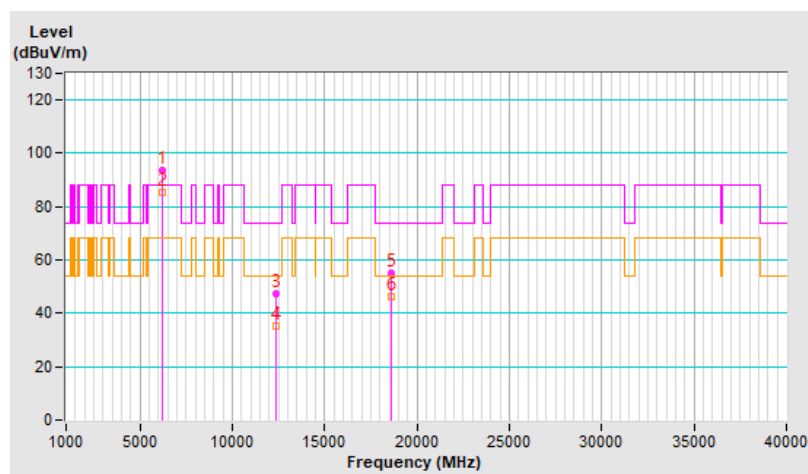


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	92.6 PK			1.85 V	46	86.8	5.8
2	*6195.00	84.3 AV			1.85 V	46	78.5	5.8
3	12390.00	47.0 PK	74.0	-27.0	1.00 V	238	32.3	14.7
4	12390.00	35.3 AV	54.0	-18.7	1.00 V	238	20.6	14.7
5	18585.00	56.6 PK	74.0	-17.4	2.25 V	169	62.1	-5.5
6	18585.00	45.5 AV	54.0	-8.5	2.25 V	169	51.0	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

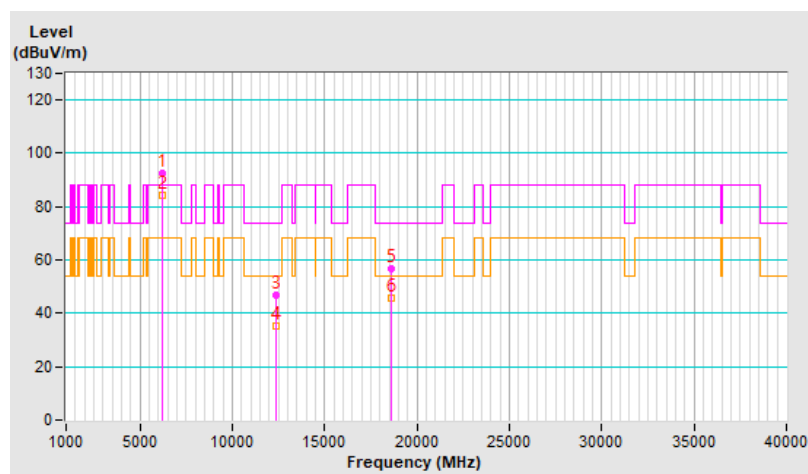


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	94.3 PK			1.81 H	180	87.5	6.8
2	*6415.00	85.4 AV			1.81 H	180	78.6	6.8
3	#12830.00	47.1 PK	88.2	-41.1	1.48 H	82	32.0	15.1
4	#12830.00	35.3 AV	68.2	-32.9	1.48 H	82	20.2	15.1
5	19245.00	55.7 PK	74.0	-18.3	1.94 H	360	60.3	-4.6
6	19245.00	47.0 AV	54.0	-7.0	1.94 H	360	51.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

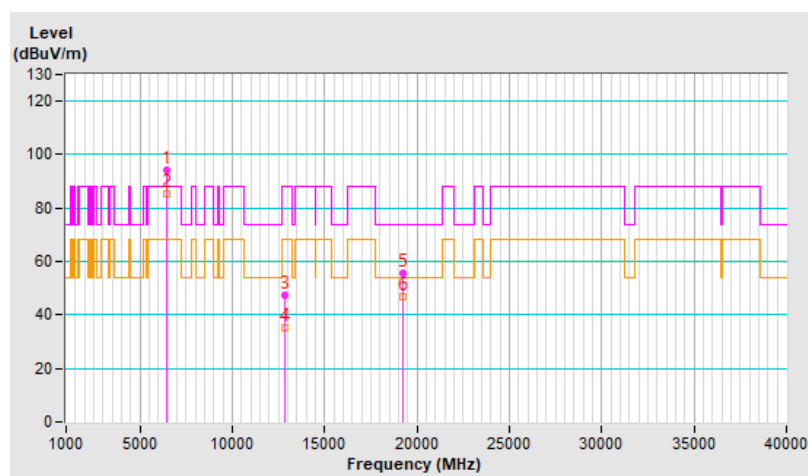


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.4 PK			1.93 V	40	85.6	6.8
2	*6415.00	84.4 AV			1.93 V	40	77.6	6.8
3	#12830.00	46.9 PK	88.2	-41.3	1.00 V	243	31.8	15.1
4	#12830.00	35.1 AV	68.2	-33.1	1.00 V	243	20.0	15.1
5	19245.00	56.7 PK	74.0	-17.3	2.26 V	179	61.3	-4.6
6	19245.00	45.7 AV	54.0	-8.3	2.26 V	179	50.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

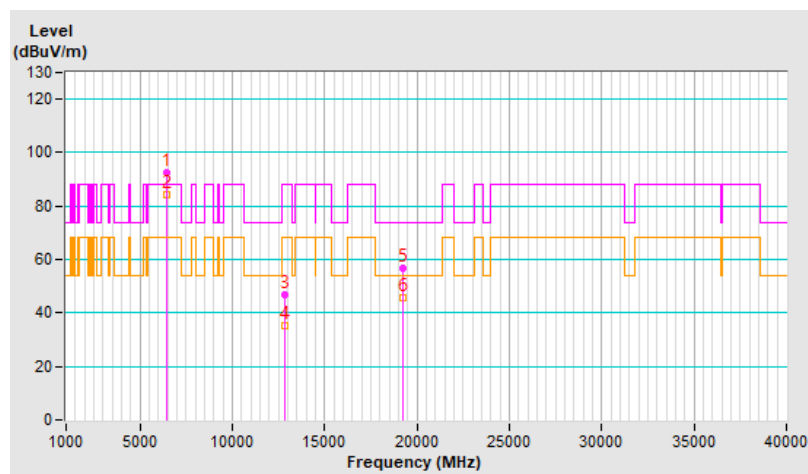


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.3 PK			1.82 H	197	86.9	7.4
2	*6535.00	85.9 AV			1.82 H	197	78.5	7.4
3	#13070.00	46.2 PK	88.2	-42.0	1.56 H	67	31.1	15.1
4	#13070.00	34.5 AV	68.2	-33.7	1.56 H	67	19.4	15.1
5	19605.00	55.1 PK	74.0	-18.9	1.97 H	360	59.9	-4.8
6	19605.00	46.6 AV	54.0	-7.4	1.97 H	360	51.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

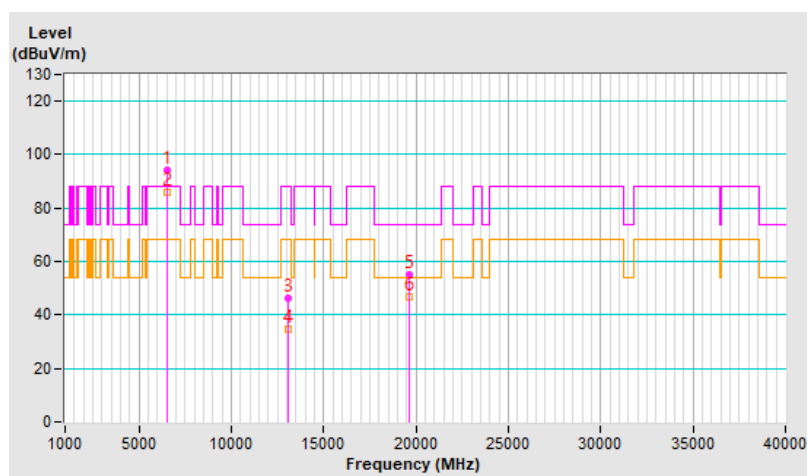


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.4 PK			1.95 V	40	85.0	7.4
2	*6535.00	84.2 AV			1.95 V	40	76.8	7.4
3	#13070.00	46.4 PK	88.2	-41.8	1.00 V	249	31.3	15.1
4	#13070.00	35.1 AV	68.2	-33.1	1.00 V	249	20.0	15.1
5	19605.00	55.4 PK	74.0	-18.6	2.17 V	180	60.2	-4.8
6	19605.00	44.7 AV	54.0	-9.3	2.17 V	180	49.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

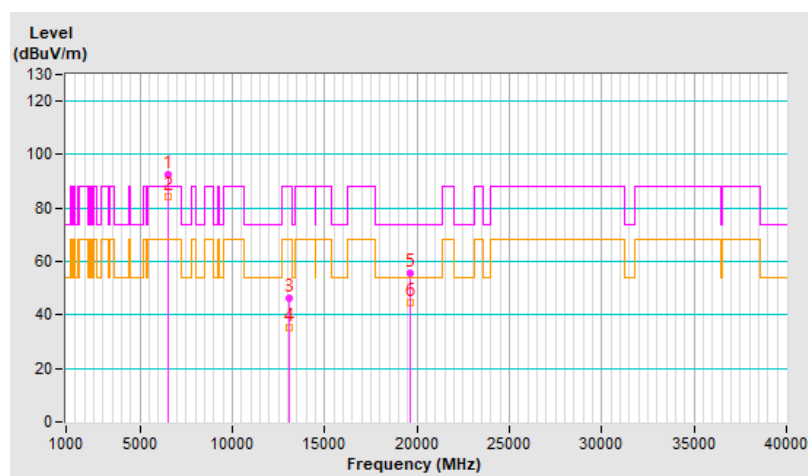


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	94.4 PK			1.85 H	175	86.7	7.7
2	*6695.00	85.5 AV			1.85 H	175	77.8	7.7
3	13390.00	46.7 PK	74.0	-27.3	1.54 H	84	31.3	15.4
4	13390.00	35.1 AV	54.0	-18.9	1.54 H	84	19.7	15.4
5	20085.00	54.9 PK	74.0	-19.1	1.96 H	360	59.2	-4.3
6	20085.00	46.5 AV	54.0	-7.5	1.96 H	360	50.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

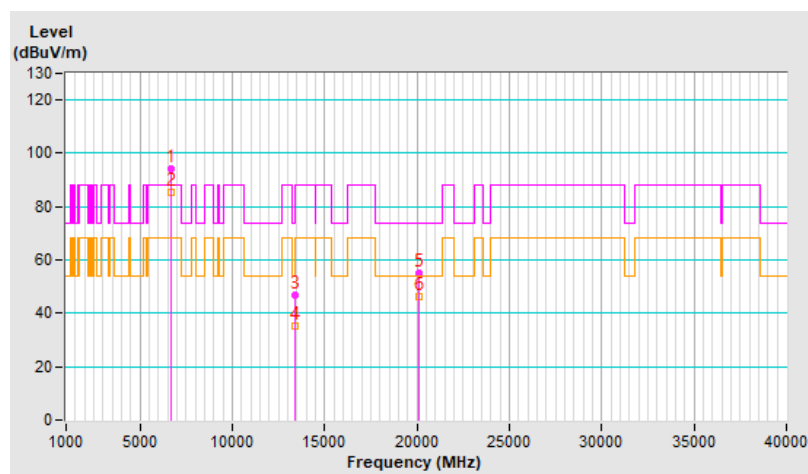


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.9 PK			1.95 V	66	85.2	7.7
2	*6695.00	85.0 AV			1.95 V	66	77.3	7.7
3	13390.00	46.3 PK	74.0	-27.7	1.02 V	269	30.9	15.4
4	13390.00	35.0 AV	54.0	-19.0	1.02 V	269	19.6	15.4
5	20085.00	56.3 PK	74.0	-17.7	2.24 V	158	60.6	-4.3
6	20085.00	45.4 AV	54.0	-8.6	2.24 V	158	49.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

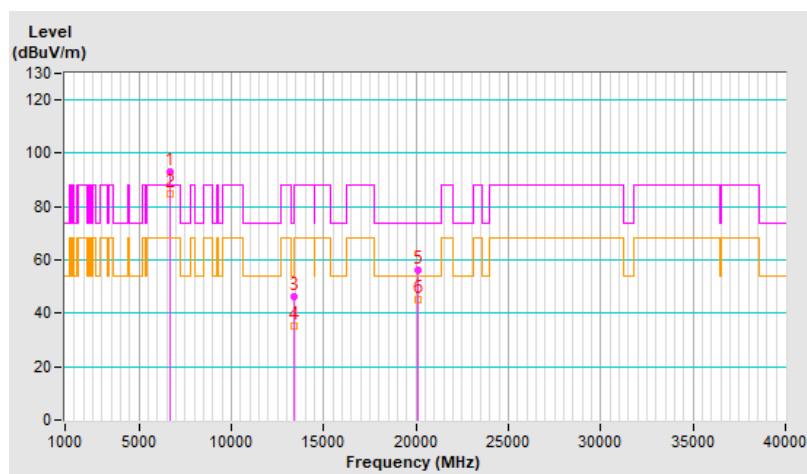


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.0 PK			1.62 H	177	84.8	8.2
2	*6855.00	84.3 AV			1.62 H	177	76.1	8.2
3	#13710.00	46.4 PK	88.2	-41.8	1.58 H	68	30.1	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.58 H	68	18.3	16.3
5	20565.00	55.8 PK	74.0	-18.2	1.90 H	360	59.5	-3.7
6	20565.00	47.0 AV	54.0	-7.0	1.90 H	360	50.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

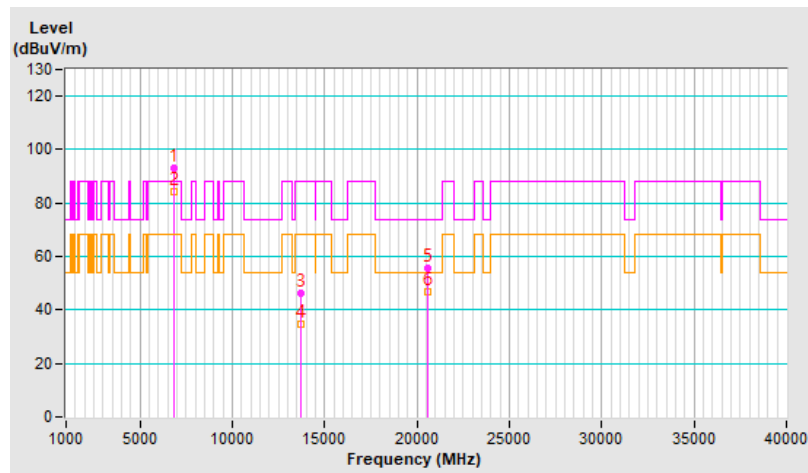


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.2 PK			1.82 V	50	83.0	8.2
2	*6855.00	81.9 AV			1.82 V	50	73.7	8.2
3	#13710.00	46.4 PK	88.2	-41.8	1.00 V	268	30.1	16.3
4	#13710.00	34.7 AV	68.2	-33.5	1.00 V	268	18.4	16.3
5	20565.00	55.7 PK	74.0	-18.3	2.19 V	161	59.4	-3.7
6	20565.00	45.0 AV	54.0	-9.0	2.19 V	161	48.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

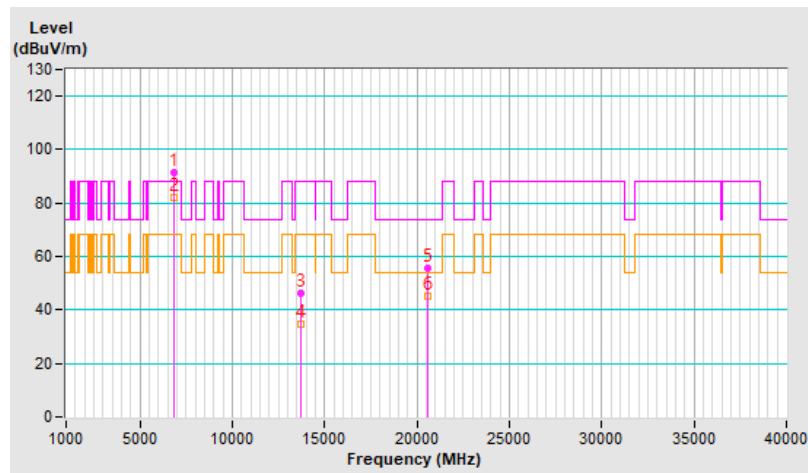


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.90 H	180	45.5	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.90 H	180	34.2	5.6
3	*5955.00	96.8 PK			1.90 H	180	91.3	5.5
4	*5955.00	86.5 AV			1.90 H	180	81.0	5.5
5	11910.00	46.9 PK	74.0	-27.1	1.49 H	81	32.3	14.6
6	11910.00	35.2 AV	54.0	-18.8	1.49 H	81	20.6	14.6
7	17865.00	56.0 PK	74.0	-18.0	1.92 H	360	30.1	25.9
8	17865.00	47.2 AV	54.0	-6.8	1.92 H	360	21.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

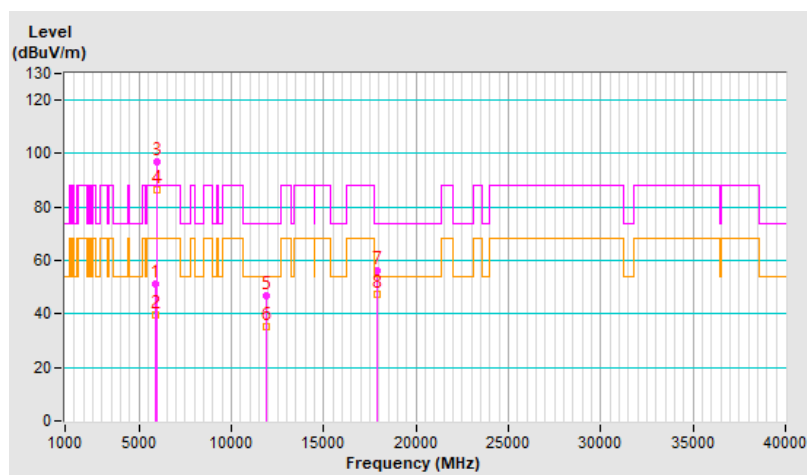


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.9 PK	88.2	-37.3	1.16 V	211	45.3	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.16 V	211	34.0	5.6
3	*5955.00	92.8 PK			1.16 V	211	87.3	5.5
4	*5955.00	81.9 AV			1.16 V	211	76.4	5.5
5	11910.00	47.2 PK	74.0	-26.8	1.00 V	248	32.6	14.6
6	11910.00	35.4 AV	54.0	-18.6	1.00 V	248	20.8	14.6
7	17865.00	55.7 PK	74.0	-18.3	2.18 V	171	29.8	25.9
8	17865.00	44.8 AV	54.0	-9.2	2.18 V	171	18.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

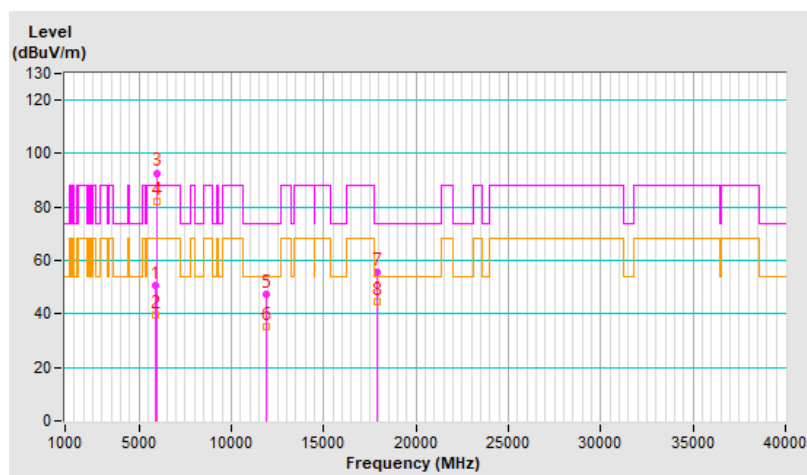


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	96.3 PK			1.88 H	182	90.5	5.8
2	*6195.00	86.1 AV			1.88 H	182	80.3	5.8
3	12390.00	46.5 PK	74.0	-27.5	1.57 H	62	31.8	14.7
4	12390.00	34.4 AV	54.0	-19.6	1.57 H	62	19.7	14.7
5	18585.00	56.0 PK	74.0	-18.0	1.89 H	360	61.5	-5.5
6	18585.00	47.4 AV	54.0	-6.6	1.89 H	360	52.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

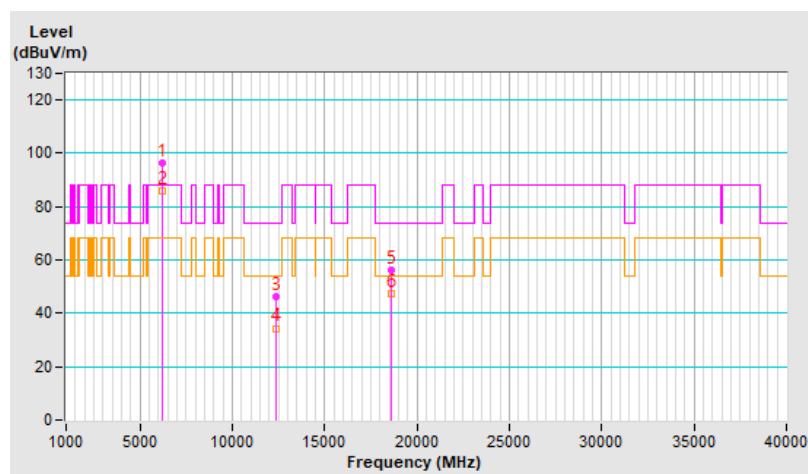


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	93.1 PK			1.10 V	202	87.3	5.8
2	*6195.00	82.1 AV			1.10 V	202	76.3	5.8
3	12390.00	47.1 PK	74.0	-26.9	1.06 V	253	32.4	14.7
4	12390.00	35.5 AV	54.0	-18.5	1.06 V	253	20.8	14.7
5	18585.00	56.1 PK	74.0	-17.9	2.23 V	162	61.6	-5.5
6	18585.00	45.0 AV	54.0	-9.0	2.23 V	162	50.5	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

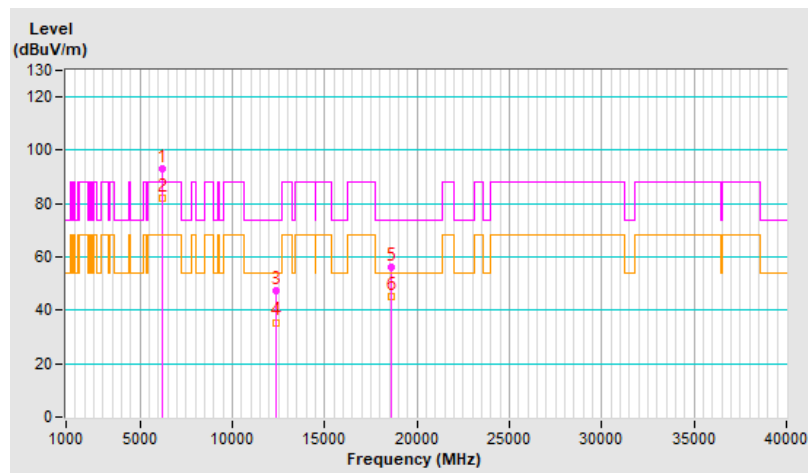


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.7 PK			1.90 H	186	89.9	6.8
2	*6415.00	86.5 AV			1.90 H	186	79.7	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.49 H	67	31.4	15.1
4	#12830.00	34.8 AV	68.2	-33.4	1.49 H	67	19.7	15.1
5	19245.00	55.5 PK	74.0	-18.5	1.94 H	360	60.1	-4.6
6	19245.00	46.5 AV	54.0	-7.5	1.94 H	360	51.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

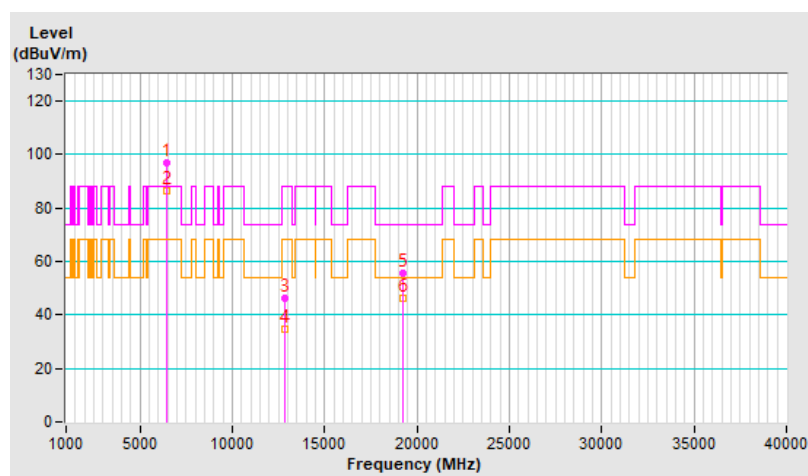


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.7 PK			1.14 V	216	85.9	6.8
2	*6415.00	81.5 AV			1.14 V	216	74.7	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.07 V	246	31.4	15.1
4	#12830.00	34.7 AV	68.2	-33.5	1.07 V	246	19.6	15.1
5	19245.00	56.4 PK	74.0	-17.6	2.25 V	155	61.0	-4.6
6	19245.00	45.3 AV	54.0	-8.7	2.25 V	155	49.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

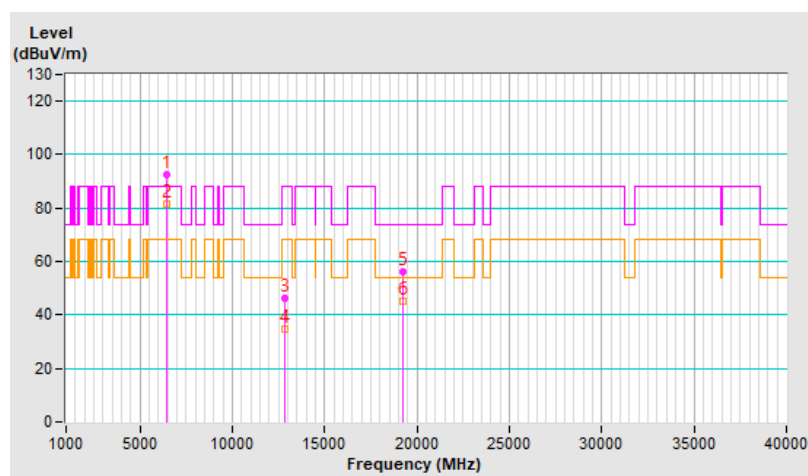


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.6 PK			1.91 H	193	89.2	7.4
2	*6535.00	86.6 AV			1.91 H	193	79.2	7.4
3	#13070.00	46.3 PK	88.2	-41.9	1.49 H	66	31.2	15.1
4	#13070.00	34.7 AV	68.2	-33.5	1.49 H	66	19.6	15.1
5	19605.00	55.9 PK	74.0	-18.1	1.97 H	360	60.7	-4.8
6	19605.00	47.2 AV	54.0	-6.8	1.97 H	360	52.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

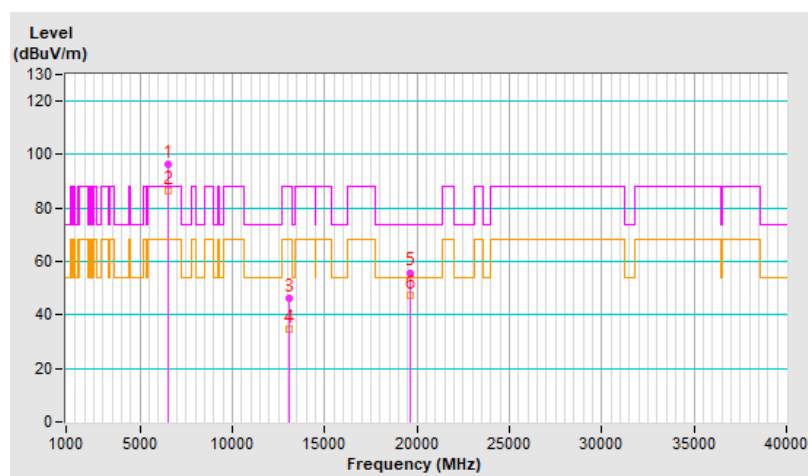


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.7 PK			1.14 V	223	85.3	7.4
2	*6535.00	81.9 AV			1.14 V	223	74.5	7.4
3	#13070.00	47.3 PK	88.2	-40.9	1.03 V	250	32.2	15.1
4	#13070.00	35.4 AV	68.2	-32.8	1.03 V	250	20.3	15.1
5	19605.00	55.4 PK	74.0	-18.6	2.27 V	153	60.2	-4.8
6	19605.00	44.7 AV	54.0	-9.3	2.27 V	153	49.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

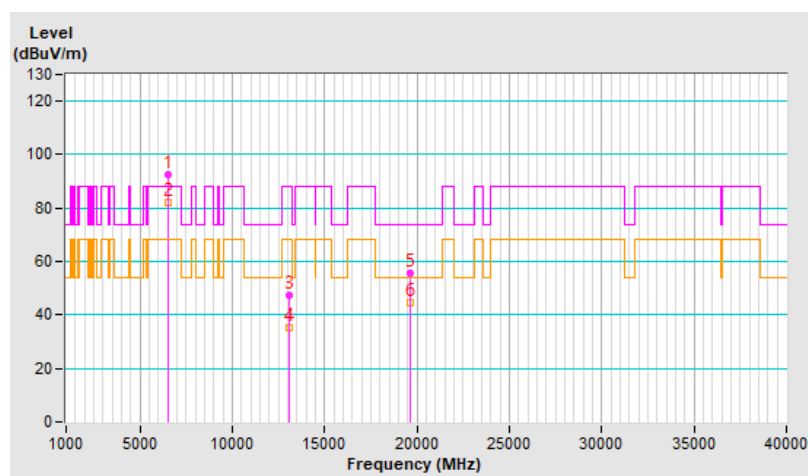


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.3 PK			1.85 H	170	88.6	7.7
2	*6695.00	86.2 AV			1.85 H	170	78.5	7.7
3	13390.00	47.0 PK	74.0	-27.0	1.53 H	70	31.6	15.4
4	13390.00	35.1 AV	54.0	-18.9	1.53 H	70	19.7	15.4
5	20085.00	55.6 PK	74.0	-18.4	1.94 H	360	59.9	-4.3
6	20085.00	46.8 AV	54.0	-7.2	1.94 H	360	51.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

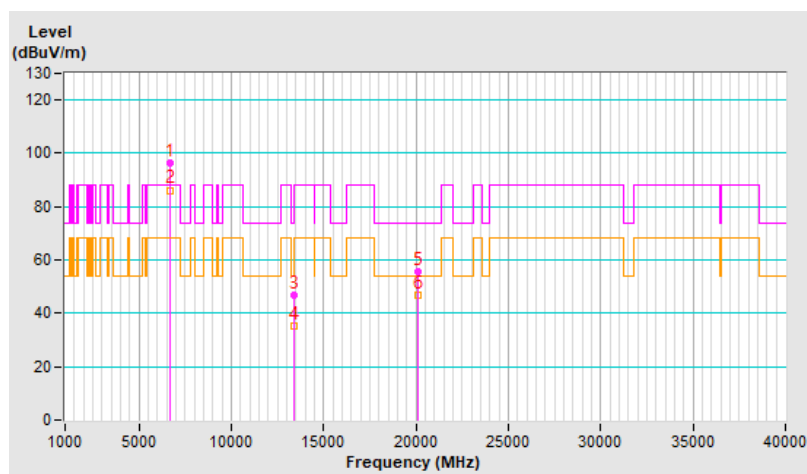


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.9 PK			1.18 V	222	85.2	7.7
2	*6695.00	81.8 AV			1.18 V	222	74.1	7.7
3	13390.00	46.8 PK	74.0	-27.2	1.02 V	259	31.4	15.4
4	13390.00	34.9 AV	54.0	-19.1	1.02 V	259	19.5	15.4
5	20085.00	56.6 PK	74.0	-17.4	2.19 V	170	60.9	-4.3
6	20085.00	45.7 AV	54.0	-8.3	2.19 V	170	50.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

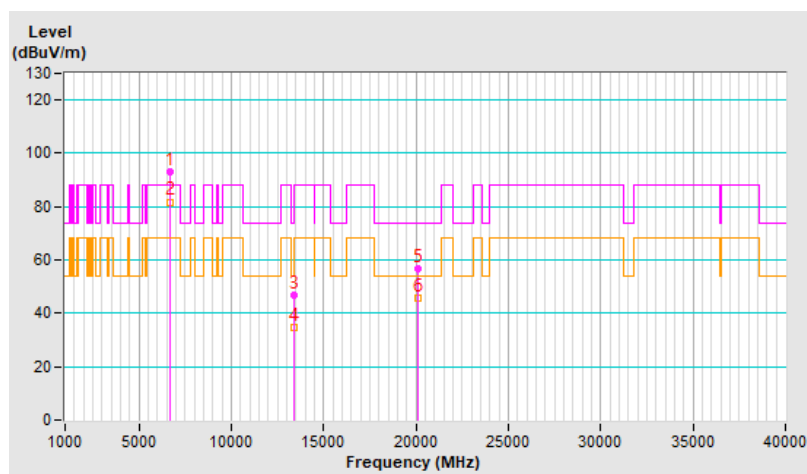


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.9 PK			1.46 H	178	85.7	8.2
2	*6855.00	83.4 AV			1.46 H	178	75.2	8.2
3	#13710.00	46.7 PK	88.2	-41.5	1.53 H	83	30.4	16.3
4	#13710.00	34.7 AV	68.2	-33.5	1.53 H	83	18.4	16.3
5	20565.00	55.9 PK	74.0	-18.1	1.92 H	360	59.6	-3.7
6	20565.00	47.4 AV	54.0	-6.6	1.92 H	360	51.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

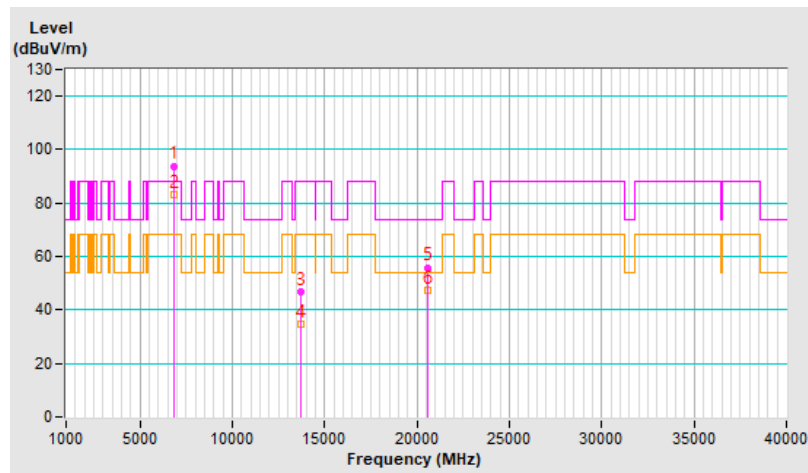


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.5 PK			1.80 V	51	85.3	8.2
2	*6855.00	51.0 AV			1.80 V	51	42.8	8.2
3	#13710.00	46.4 PK	88.2	-41.8	1.05 V	255	30.1	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.05 V	255	18.3	16.3
5	20565.00	55.7 PK	74.0	-18.3	2.24 V	171	59.4	-3.7
6	20565.00	44.8 AV	54.0	-9.2	2.24 V	171	48.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

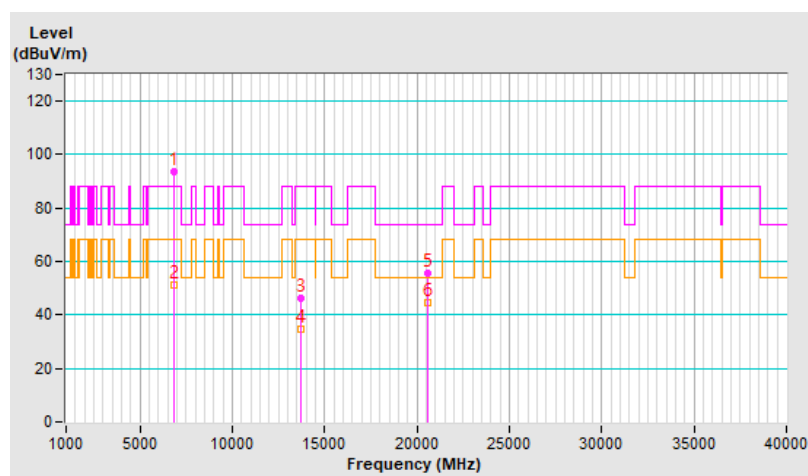


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.7 PK	88.2	-35.5	1.79 H	184	47.1	5.6
2	#5925.00	39.9 AV	68.2	-28.3	1.79 H	184	34.3	5.6
3	*5965.00	96.3 PK			1.79 H	184	90.8	5.5
4	*5965.00	86.3 AV			1.79 H	184	80.8	5.5
5	11930.00	46.7 PK	74.0	-27.3	1.59 H	67	32.2	14.5
6	11930.00	34.9 AV	54.0	-19.1	1.59 H	67	20.4	14.5
7	17895.00	55.8 PK	74.0	-18.2	1.97 H	360	29.4	26.4
8	17895.00	47.2 AV	54.0	-6.8	1.97 H	360	20.8	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

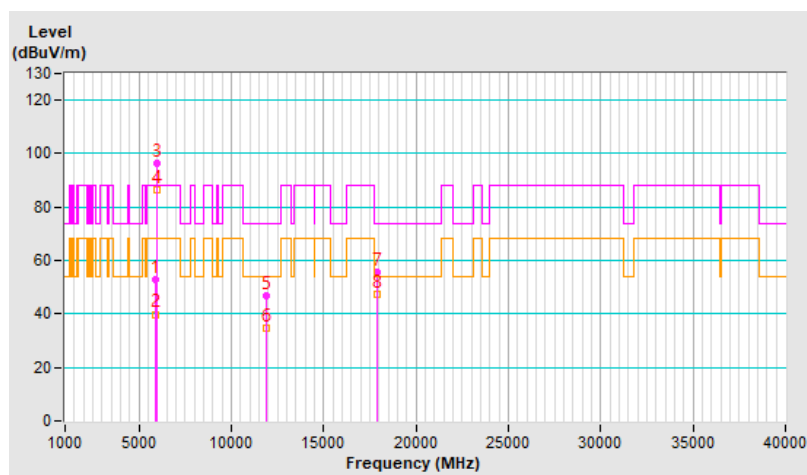


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.22 V	209	45.8	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.22 V	209	33.9	5.6
3	*5965.00	93.2 PK			1.22 V	209	87.7	5.5
4	*5965.00	82.1 AV			1.22 V	209	76.6	5.5
5	11930.00	46.5 PK	74.0	-27.5	1.00 V	241	32.0	14.5
6	11930.00	34.8 AV	54.0	-19.2	1.00 V	241	20.3	14.5
7	17895.00	56.0 PK	74.0	-18.0	2.21 V	179	29.6	26.4
8	17895.00	45.4 AV	54.0	-8.6	2.21 V	179	19.0	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

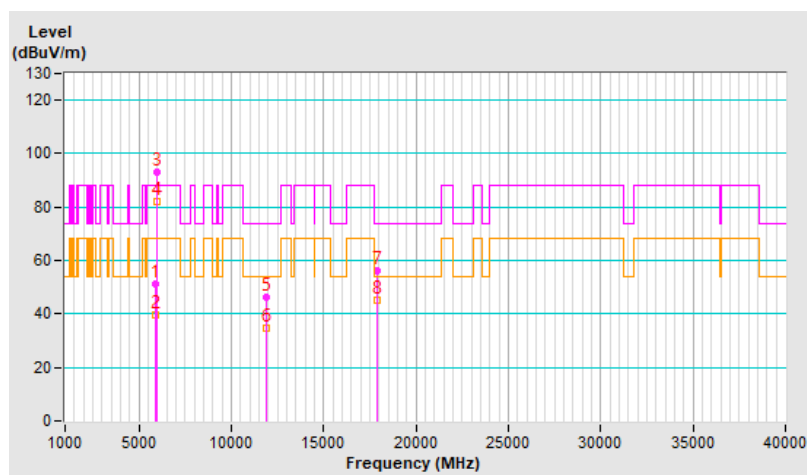


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	95.9 PK			1.83 H	175	90.0	5.9
2	*6205.00	86.1 AV			1.83 H	175	80.2	5.9
3	12410.00	46.6 PK	74.0	-27.4	1.58 H	65	31.9	14.7
4	12410.00	34.7 AV	54.0	-19.3	1.58 H	65	20.0	14.7
5	18615.00	55.9 PK	74.0	-18.1	1.97 H	360	61.3	-5.4
6	18615.00	47.1 AV	54.0	-6.9	1.97 H	360	52.5	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

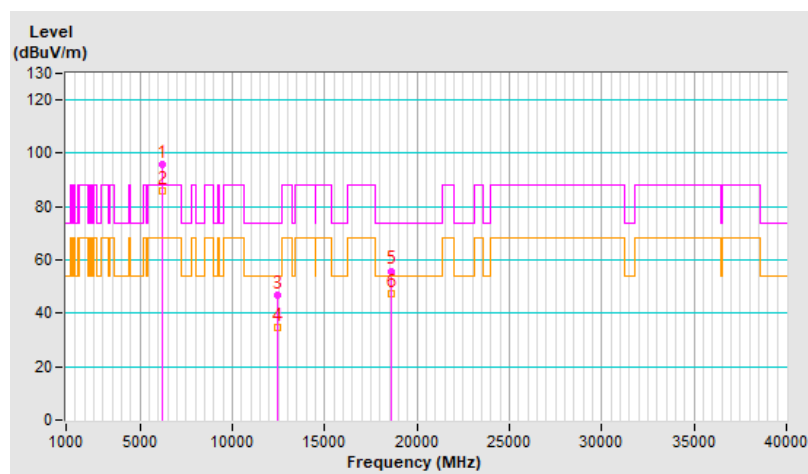


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	92.6 PK			1.25 V	224	86.7	5.9
2	*6205.00	81.6 AV			1.25 V	224	75.7	5.9
3	12410.00	47.2 PK	74.0	-26.8	1.04 V	246	32.5	14.7
4	12410.00	35.6 AV	54.0	-18.4	1.04 V	246	20.9	14.7
5	18615.00	56.1 PK	74.0	-17.9	2.15 V	171	61.5	-5.4
6	18615.00	44.9 AV	54.0	-9.1	2.15 V	171	50.3	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

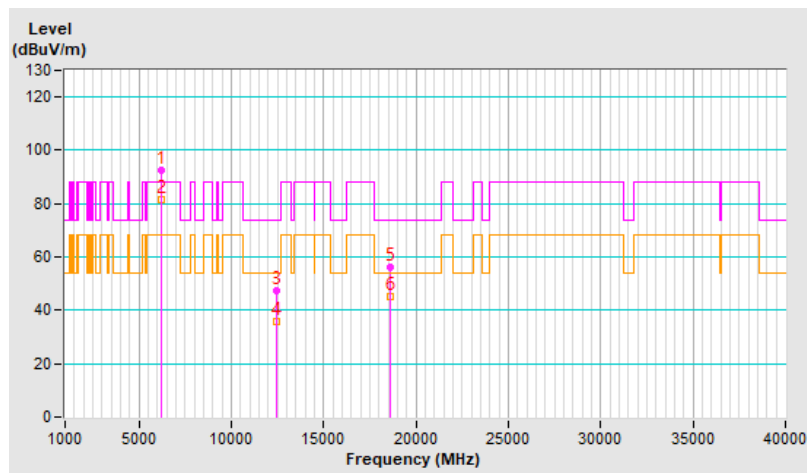


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	95.9 PK			1.80 H	176	89.2	6.7
2	*6405.00	85.8 AV			1.80 H	176	79.1	6.7
3	#12810.00	46.7 PK	88.2	-41.5	1.58 H	74	31.6	15.1
4	#12810.00	34.5 AV	68.2	-33.7	1.58 H	74	19.4	15.1
5	19215.00	56.1 PK	74.0	-17.9	1.90 H	360	60.8	-4.7
6	19215.00	47.2 AV	54.0	-6.8	1.90 H	360	51.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

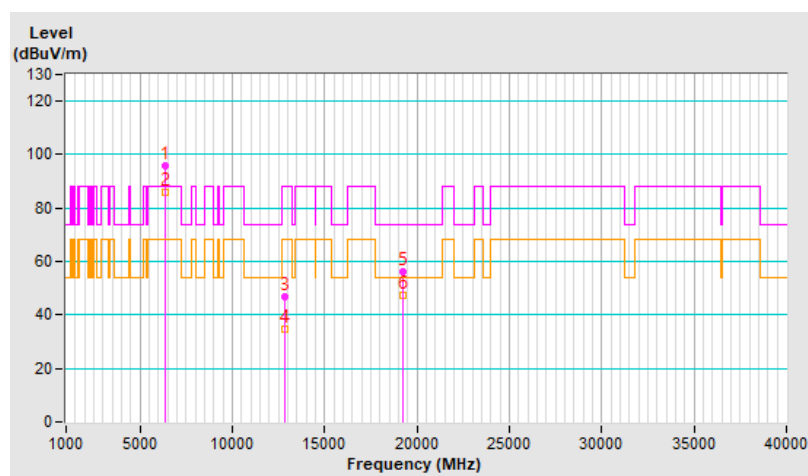


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	93.0 PK			1.17 V	221	86.3	6.7
2	*6405.00	82.0 AV			1.17 V	221	75.3	6.7
3	#12810.00	47.0 PK	88.2	-41.2	1.00 V	268	31.9	15.1
4	#12810.00	35.3 AV	68.2	-32.9	1.00 V	268	20.2	15.1
5	19215.00	56.4 PK	74.0	-17.6	2.25 V	157	61.1	-4.7
6	19215.00	45.3 AV	54.0	-8.7	2.25 V	157	50.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

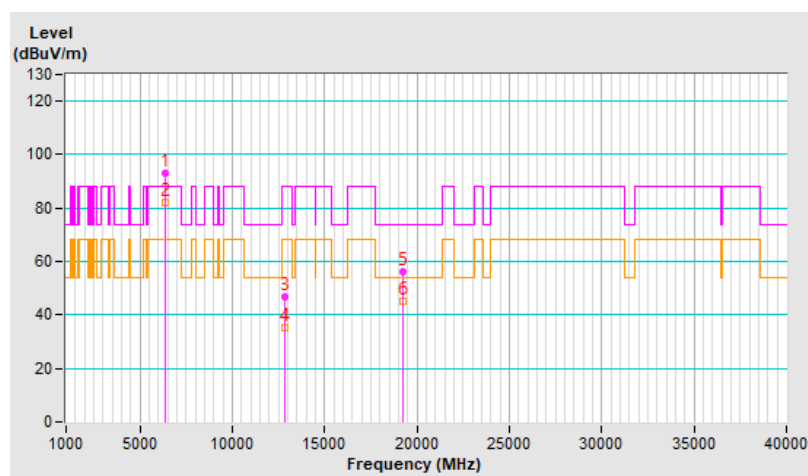


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	96.8 PK			1.84 H	181	89.3	7.5
2	*6565.00	86.8 AV			1.84 H	181	79.3	7.5
3	#13130.00	46.7 PK	88.2	-41.5	1.52 H	69	31.4	15.3
4	#13130.00	34.5 AV	68.2	-33.7	1.52 H	69	19.2	15.3
5	19695.00	55.4 PK	74.0	-18.6	1.95 H	360	59.8	-4.4
6	19695.00	46.6 AV	54.0	-7.4	1.95 H	360	51.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

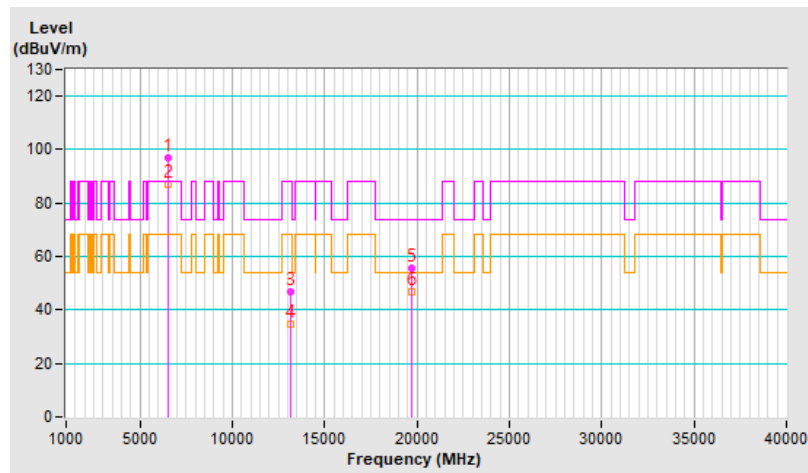


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	93.0 PK			1.28 V	202	85.5	7.5
2	*6565.00	82.1 AV			1.28 V	202	74.6	7.5
3	#13130.00	46.5 PK	88.2	-41.7	1.05 V	240	31.2	15.3
4	#13130.00	34.8 AV	68.2	-33.4	1.05 V	240	19.5	15.3
5	19695.00	56.0 PK	74.0	-18.0	2.25 V	158	60.4	-4.4
6	19695.00	45.1 AV	54.0	-8.9	2.25 V	158	49.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

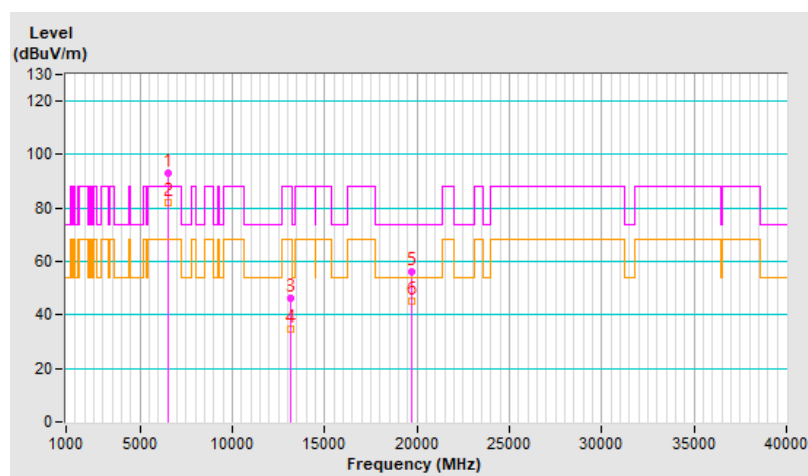


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	96.0 PK			1.81 H	194	88.3	7.7
2	*6685.00	86.1 AV			1.81 H	194	78.4	7.7
3	13370.00	46.4 PK	74.0	-27.6	1.52 H	80	31.1	15.3
4	13370.00	34.7 AV	54.0	-19.3	1.52 H	80	19.4	15.3
5	20055.00	55.1 PK	74.0	-18.9	1.87 H	360	59.5	-4.4
6	20055.00	46.4 AV	54.0	-7.6	1.87 H	360	50.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

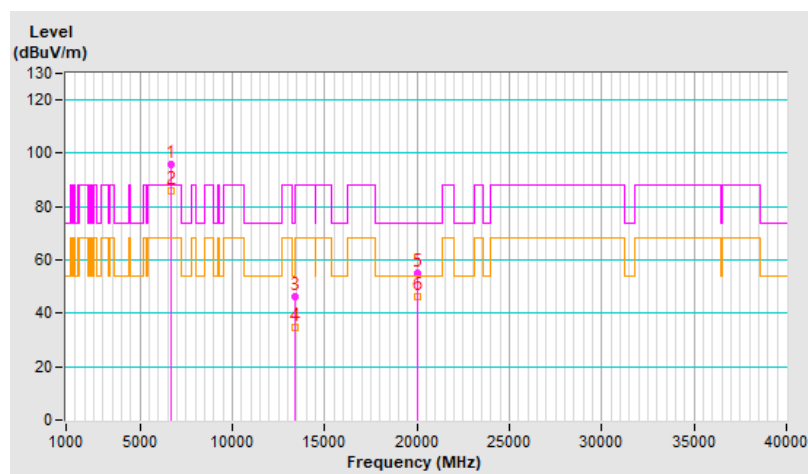


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	93.5 PK			1.20 V	224	85.8	7.7
2	*6685.00	82.5 AV			1.20 V	224	74.8	7.7
3	13370.00	46.9 PK	74.0	-27.1	1.05 V	246	31.6	15.3
4	13370.00	35.1 AV	54.0	-18.9	1.05 V	246	19.8	15.3
5	20055.00	55.7 PK	74.0	-18.3	2.18 V	170	60.1	-4.4
6	20055.00	45.1 AV	54.0	-8.9	2.18 V	170	49.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

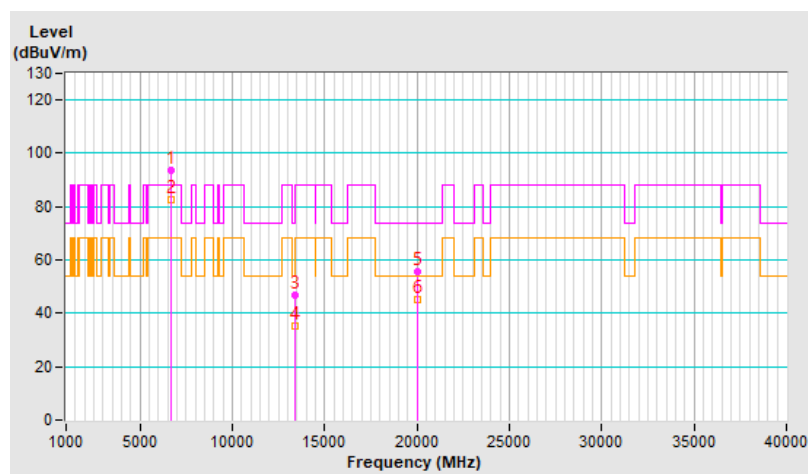


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	93.4 PK			1.68 H	177	85.2	8.2
2	*6845.00	84.8 AV			1.68 H	177	76.6	8.2
3	#13690.00	46.4 PK	88.2	-41.8	1.55 H	75	30.1	16.3
4	#13690.00	34.5 AV	68.2	-33.7	1.55 H	75	18.2	16.3
5	20535.00	56.0 PK	74.0	-18.0	1.97 H	360	59.7	-3.7
6	20535.00	47.2 AV	54.0	-6.8	1.97 H	360	50.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

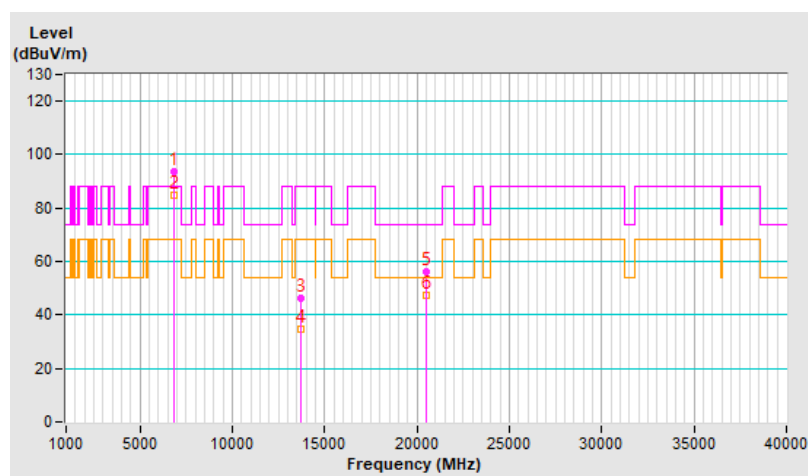


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	92.8 PK			1.60 V	194	84.6	8.2
2	*6845.00	82.3 AV			1.60 V	194	74.1	8.2
3	#13690.00	46.8 PK	88.2	-41.4	1.06 V	249	30.5	16.3
4	#13690.00	35.2 AV	68.2	-33.0	1.06 V	249	18.9	16.3
5	20535.00	56.0 PK	74.0	-18.0	2.17 V	167	59.7	-3.7
6	20535.00	45.1 AV	54.0	-8.9	2.17 V	167	48.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

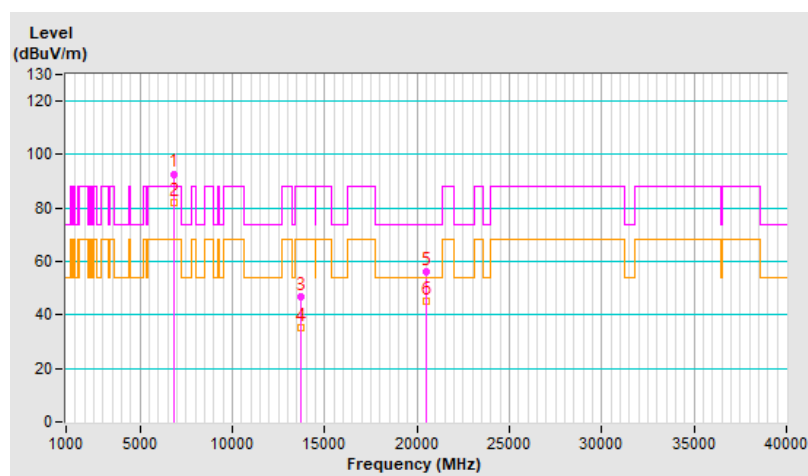


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	1.69 H	185	46.2	5.6
2	#5925.00	40.0 AV	68.2	-28.2	1.69 H	185	34.4	5.6
3	*5985.00	97.2 PK			1.69 H	185	91.7	5.5
4	*5985.00	85.9 AV			1.69 H	185	80.4	5.5
5	11970.00	46.1 PK	74.0	-27.9	1.58 H	79	31.6	14.5
6	11970.00	34.3 AV	54.0	-19.7	1.58 H	79	19.8	14.5
7	17955.00	55.4 PK	74.0	-18.6	1.95 H	360	27.1	28.3
8	17955.00	46.9 AV	54.0	-7.1	1.95 H	360	18.6	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

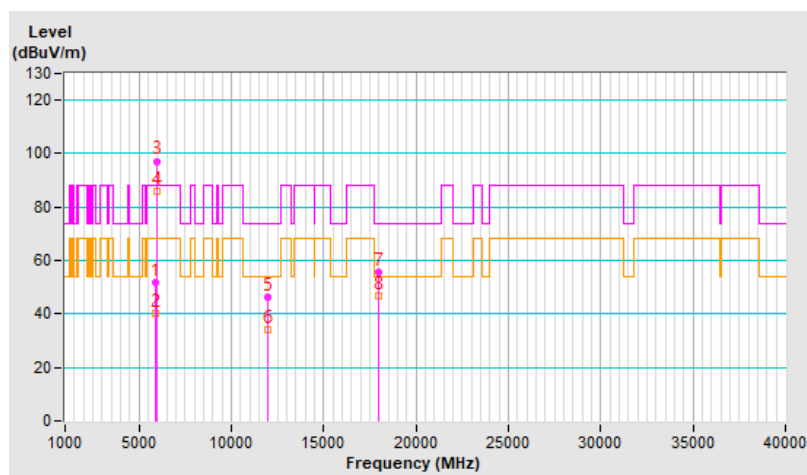


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.1 PK	88.2	-35.1	1.00 V	212	47.5	5.6
2	#5925.00	51.2 AV	68.2	-17.0	1.00 V	212	45.6	5.6
3	*5985.00	95.1 PK			1.00 V	212	89.6	5.5
4	*5985.00	83.2 AV			1.00 V	212	77.7	5.5
5	11970.00	47.2 PK	74.0	-26.8	1.02 V	244	32.7	14.5
6	11970.00	35.3 AV	54.0	-18.7	1.02 V	244	20.8	14.5
7	17955.00	56.5 PK	74.0	-17.5	2.15 V	152	28.2	28.3
8	17955.00	45.5 AV	54.0	-8.5	2.15 V	152	17.2	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

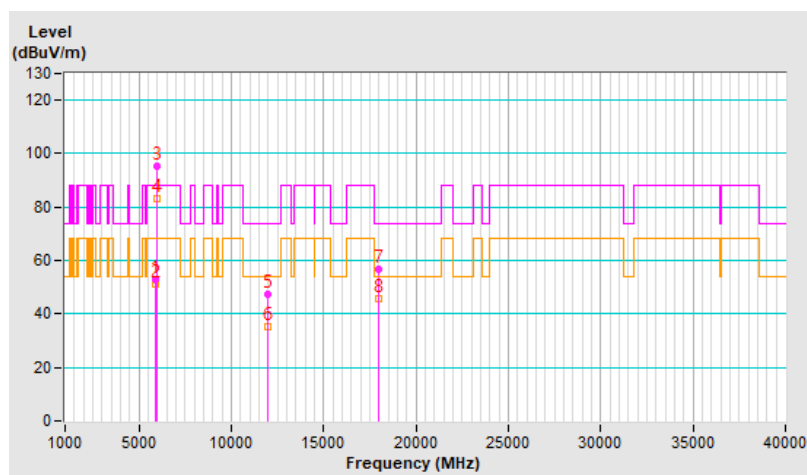


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	97.3 PK			1.65 H	185	91.4	5.9
2	*6225.00	86.3 AV			1.65 H	185	80.4	5.9
3	12450.00	47.1 PK	74.0	-26.9	1.55 H	64	32.5	14.6
4	12450.00	35.1 AV	54.0	-18.9	1.55 H	64	20.5	14.6
5	18675.00	55.0 PK	74.0	-19.0	1.98 H	360	60.3	-5.3
6	18675.00	46.5 AV	54.0	-7.5	1.98 H	360	51.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

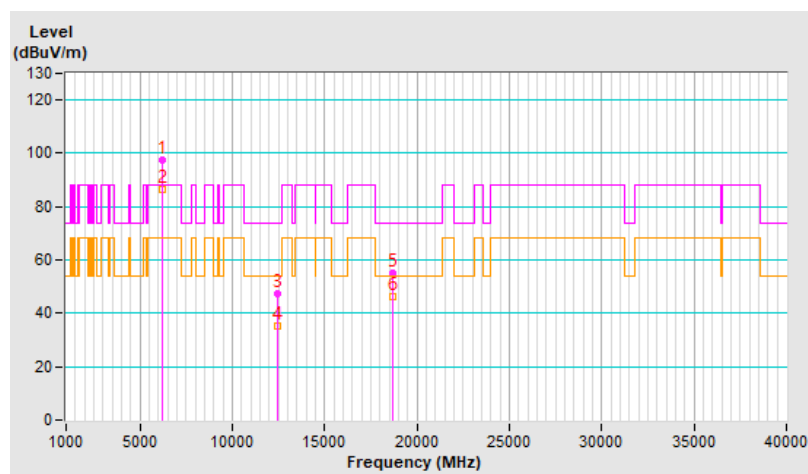


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	95.1 PK			1.00 V	223	89.2	5.9
2	*6225.00	83.3 AV			1.00 V	223	77.4	5.9
3	12450.00	46.4 PK	74.0	-27.6	1.00 V	257	31.8	14.6
4	12450.00	34.7 AV	54.0	-19.3	1.00 V	257	20.1	14.6
5	18675.00	56.4 PK	74.0	-17.6	2.17 V	177	61.7	-5.3
6	18675.00	45.3 AV	54.0	-8.7	2.17 V	177	50.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

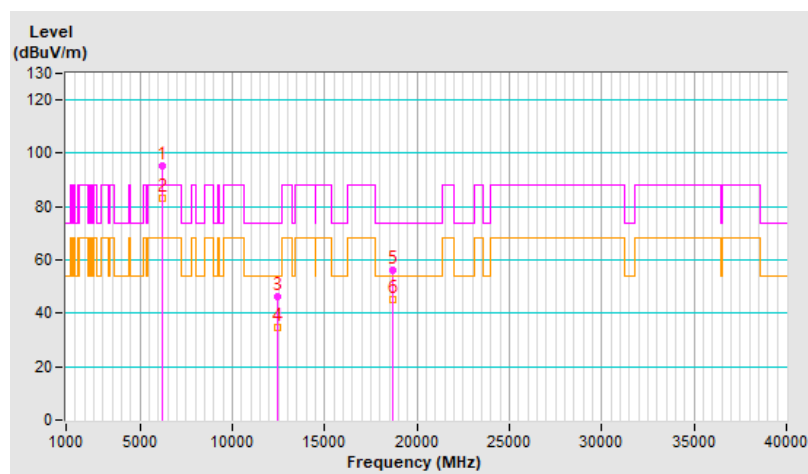


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	97.2 PK			1.71 H	200	90.6	6.6
2	*6385.00	85.8 AV			1.71 H	200	79.2	6.6
3	#12770.00	46.4 PK	88.2	-41.8	1.56 H	64	31.5	14.9
4	#12770.00	34.4 AV	68.2	-33.8	1.56 H	64	19.5	14.9
5	19155.00	55.2 PK	74.0	-18.8	1.94 H	360	59.9	-4.7
6	19155.00	46.6 AV	54.0	-7.4	1.94 H	360	51.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

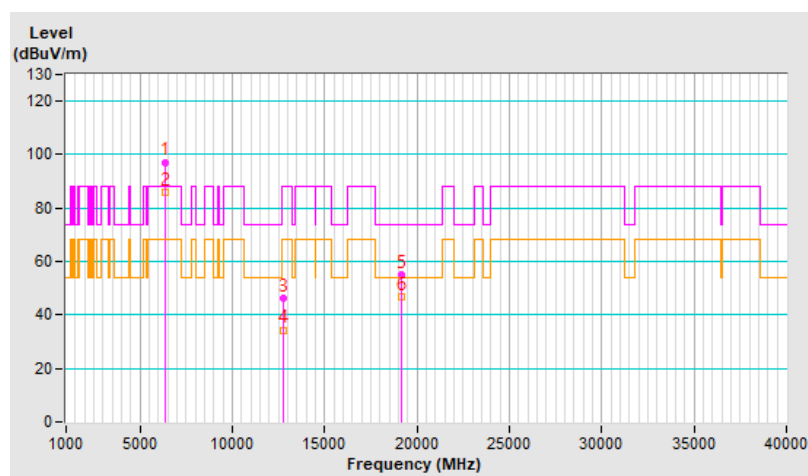


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	95.2 PK			1.00 V	216	88.6	6.6
2	*6385.00	83.2 AV			1.00 V	216	76.6	6.6
3	#12770.00	47.4 PK	88.2	-40.8	1.00 V	266	32.5	14.9
4	#12770.00	35.5 AV	68.2	-32.7	1.00 V	266	20.6	14.9
5	19155.00	55.6 PK	74.0	-18.4	2.15 V	160	60.3	-4.7
6	19155.00	44.9 AV	54.0	-9.1	2.15 V	160	49.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

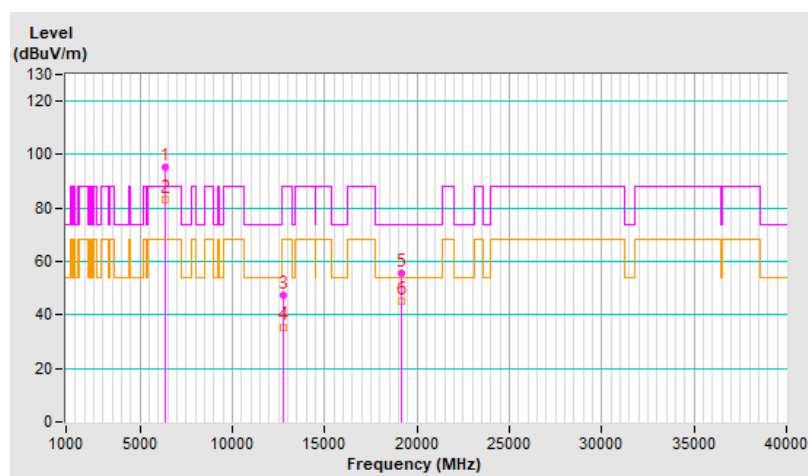


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	97.1 PK			1.74 H	187	89.3	7.8
2	*6625.00	85.8 AV			1.74 H	187	78.0	7.8
3	13250.00	46.3 PK	74.0	-27.7	1.58 H	68	30.9	15.4
4	13250.00	34.4 AV	54.0	-19.6	1.58 H	68	19.0	15.4
5	19875.00	55.9 PK	74.0	-18.1	1.97 H	360	60.4	-4.5
6	19875.00	47.1 AV	54.0	-6.9	1.97 H	360	51.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

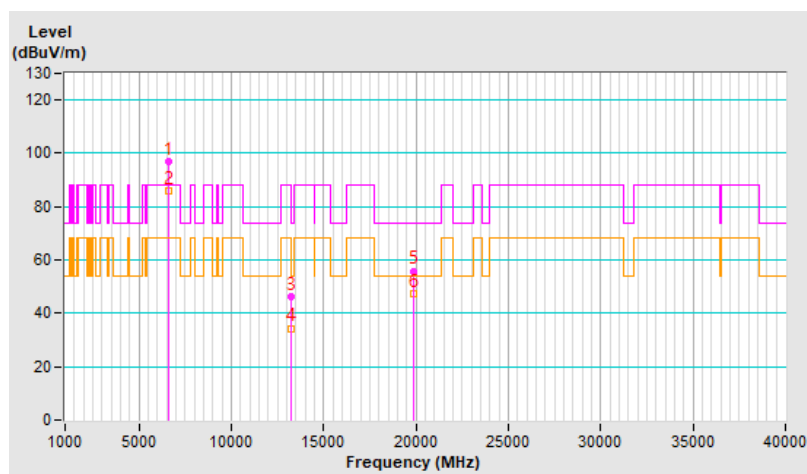


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	94.7 PK			1.00 V	216	86.9	7.8
2	*6625.00	82.8 AV			1.00 V	216	75.0	7.8
3	13250.00	46.4 PK	74.0	-27.6	1.00 V	254	31.0	15.4
4	13250.00	35.1 AV	54.0	-18.9	1.00 V	254	19.7	15.4
5	19875.00	56.1 PK	74.0	-17.9	2.22 V	180	60.6	-4.5
6	19875.00	44.9 AV	54.0	-9.1	2.22 V	180	49.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

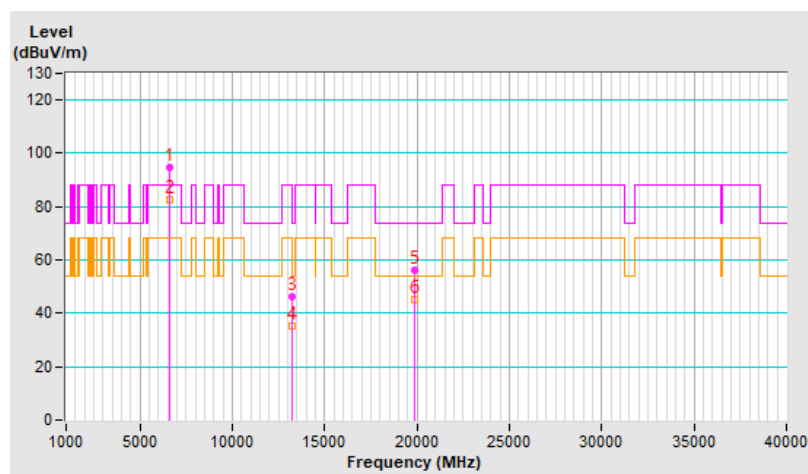


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	97.5 PK			1.64 H	200	89.9	7.6
2	*6705.00	86.1 AV			1.64 H	200	78.5	7.6
3	#13410.00	46.2 PK	88.2	-42.0	1.53 H	83	30.8	15.4
4	#13410.00	34.4 AV	68.2	-33.8	1.53 H	83	19.0	15.4
5	20115.00	56.0 PK	74.0	-18.0	1.98 H	360	60.1	-4.1
6	20115.00	47.2 AV	54.0	-6.8	1.98 H	360	51.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

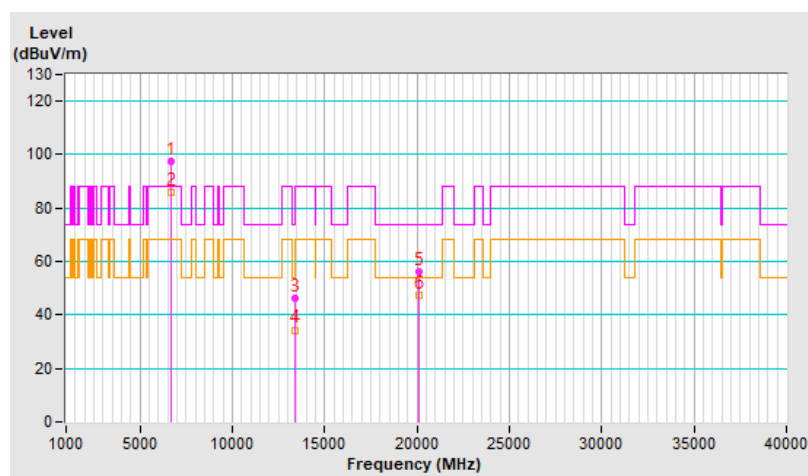


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	95.6 PK			1.00 V	204	88.0	7.6
2	*6705.00	83.7 AV			1.00 V	204	76.1	7.6
3	#13410.00	47.0 PK	88.2	-41.2	1.06 V	238	31.6	15.4
4	#13410.00	35.3 AV	68.2	-32.9	1.06 V	238	19.9	15.4
5	20115.00	55.9 PK	74.0	-18.1	2.21 V	165	60.0	-4.1
6	20115.00	45.2 AV	54.0	-8.8	2.21 V	165	49.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

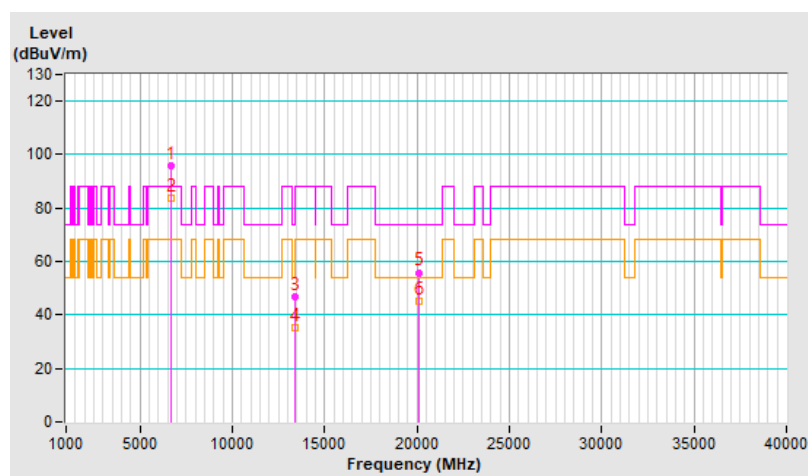


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	94.5 PK			1.64 H	178	86.8	7.7
2	*6785.00	83.1 AV			1.64 H	178	75.4	7.7
3	#13570.00	46.1 PK	88.2	-42.1	1.54 H	91	30.4	15.7
4	#13570.00	34.3 AV	68.2	-33.9	1.54 H	91	18.6	15.7
5	20355.00	55.6 PK	74.0	-18.4	1.88 H	360	59.4	-3.8
6	20355.00	46.9 AV	54.0	-7.1	1.88 H	360	50.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

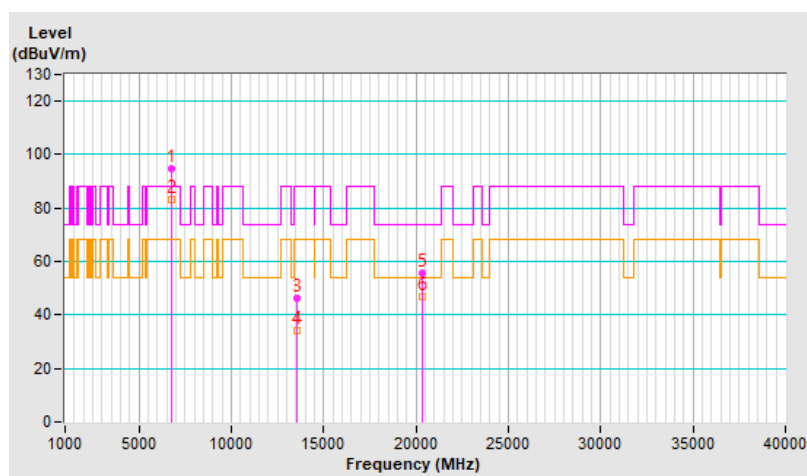


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	92.5 PK			1.50 V	191	84.8	7.7
2	*6785.00	81.4 AV			1.50 V	191	73.7	7.7
3	#13570.00	47.0 PK	88.2	-41.2	1.06 V	257	31.3	15.7
4	#13570.00	35.2 AV	68.2	-33.0	1.06 V	257	19.5	15.7
5	20355.00	55.9 PK	74.0	-18.1	2.18 V	160	59.7	-3.8
6	20355.00	45.0 AV	54.0	-9.0	2.18 V	160	48.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

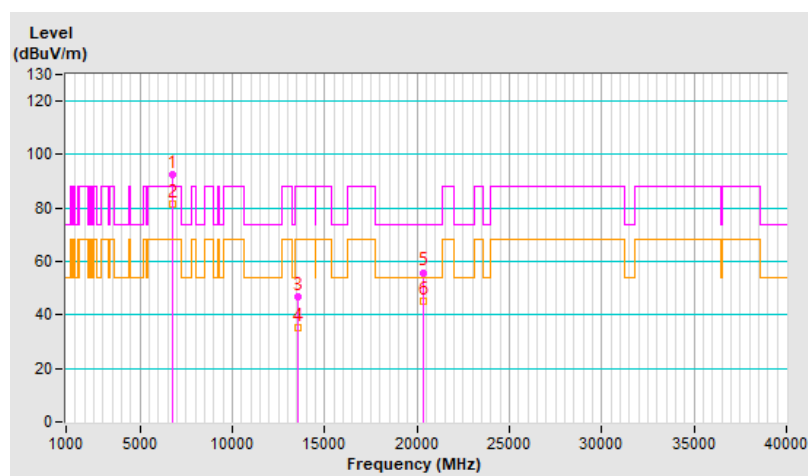


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.8 PK	88.2	-28.4	1.72 H	180	54.2	5.6
2	#5925.00	44.6 AV	68.2	-23.6	1.72 H	180	39.0	5.6
3	*6025.00	96.7 PK			1.72 H	180	91.1	5.6
4	*6025.00	85.3 AV			1.72 H	180	79.7	5.6
5	12050.00	46.4 PK	74.0	-27.6	1.57 H	66	31.8	14.6
6	12050.00	34.7 AV	54.0	-19.3	1.57 H	66	20.1	14.6
7	18075.00	55.2 PK	74.0	-18.8	1.89 H	360	60.5	-5.3
8	18075.00	46.5 AV	54.0	-7.5	1.89 H	360	51.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

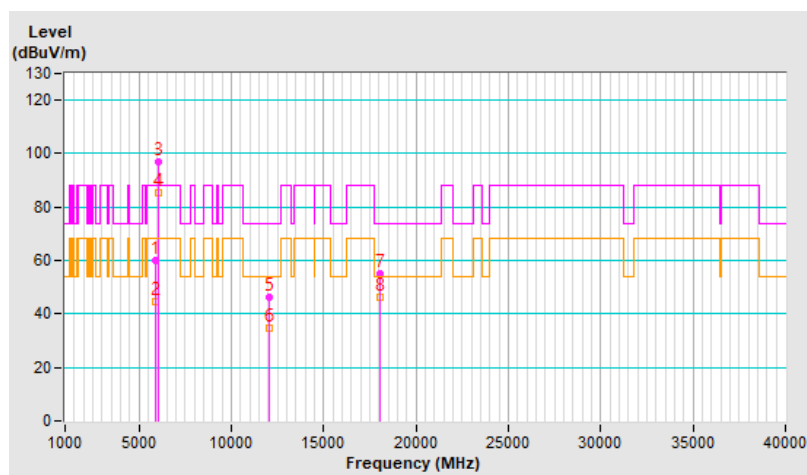


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.1 PK	88.2	-31.1	1.00 V	0	51.5	5.6
2	#5925.00	42.0 AV	68.2	-26.2	1.00 V	0	36.4	5.6
3	*6025.00	93.1 PK			1.14 V	211	87.5	5.6
4	*6025.00	82.5 AV			1.14 V	211	76.9	5.6
5	12050.00	46.1 PK	74.0	-27.9	1.04 V	261	31.5	14.6
6	12050.00	34.7 AV	54.0	-19.3	1.04 V	261	20.1	14.6
7	18075.00	55.8 PK	74.0	-18.2	2.18 V	162	61.1	-5.3
8	18075.00	45.1 AV	54.0	-8.9	2.18 V	162	50.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

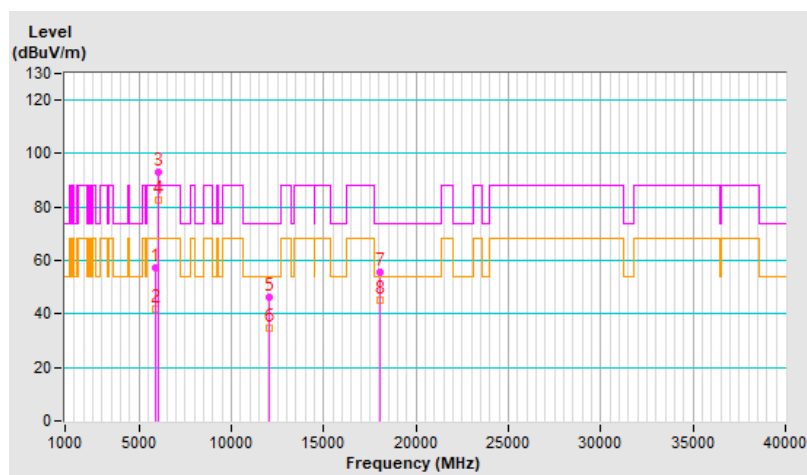


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	96.4 PK			1.75 H	169	90.6	5.8
2	*6185.00	85.0 AV			1.75 H	169	79.2	5.8
3	12370.00	46.4 PK	74.0	-27.6	1.56 H	79	31.7	14.7
4	12370.00	34.4 AV	54.0	-19.6	1.56 H	79	19.7	14.7
5	18555.00	56.0 PK	74.0	-18.0	1.98 H	360	61.4	-5.4
6	18555.00	47.1 AV	54.0	-6.9	1.98 H	360	52.5	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

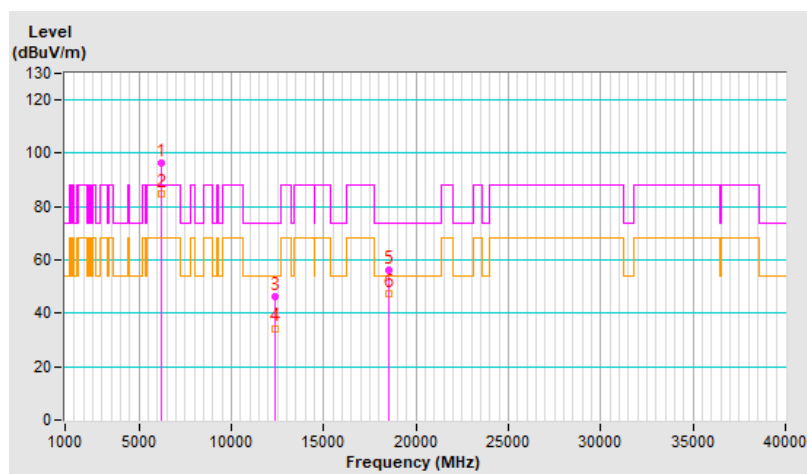


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	93.1 PK			1.13 V	217	87.3	5.8
2	*6185.00	82.7 AV			1.13 V	217	76.9	5.8
3	12370.00	47.0 PK	74.0	-27.0	1.00 V	258	32.3	14.7
4	12370.00	35.3 AV	54.0	-18.7	1.00 V	258	20.6	14.7
5	18555.00	55.7 PK	74.0	-18.3	2.20 V	162	61.1	-5.4
6	18555.00	44.8 AV	54.0	-9.2	2.20 V	162	50.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

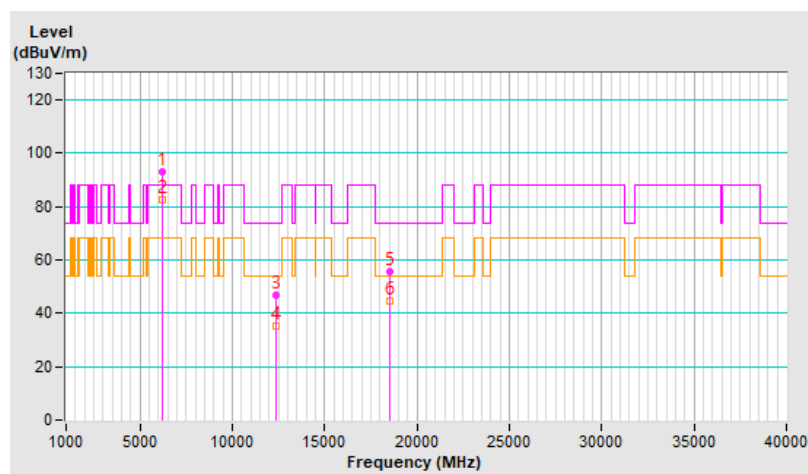


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.4 PK			1.73 H	181	90.0	6.4
2	*6345.00	85.0 AV			1.73 H	181	78.6	6.4
3	12690.00	46.2 PK	74.0	-27.8	1.56 H	78	31.3	14.9
4	12690.00	34.5 AV	54.0	-19.5	1.56 H	78	19.6	14.9
5	19035.00	55.5 PK	74.0	-18.5	1.96 H	360	60.4	-4.9
6	19035.00	47.0 AV	54.0	-7.0	1.96 H	360	51.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

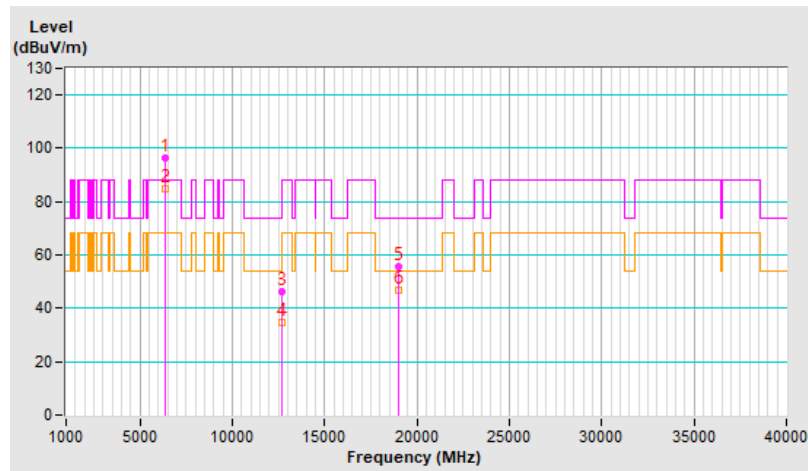


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	92.8 PK			1.12 V	220	86.4	6.4
2	*6345.00	82.3 AV			1.12 V	220	75.9	6.4
3	12690.00	47.0 PK	74.0	-27.0	1.07 V	240	32.1	14.9
4	12690.00	35.2 AV	54.0	-18.8	1.07 V	240	20.3	14.9
5	19035.00	56.0 PK	74.0	-18.0	2.24 V	174	60.9	-4.9
6	19035.00	45.0 AV	54.0	-9.0	2.24 V	174	49.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

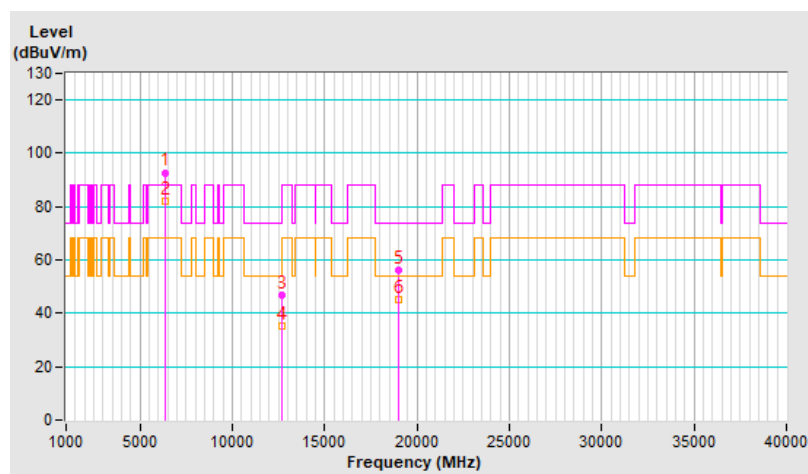


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	97.4 PK			1.60 H	177	89.6	7.8
2	*6665.00	86.7 AV			1.60 H	177	78.9	7.8
3	13330.00	47.0 PK	74.0	-27.0	1.49 H	82	31.7	15.3
4	13330.00	35.0 AV	54.0	-19.0	1.49 H	82	19.7	15.3
5	19995.00	55.5 PK	74.0	-18.5	1.95 H	360	59.9	-4.4
6	19995.00	47.0 AV	54.0	-7.0	1.95 H	360	51.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

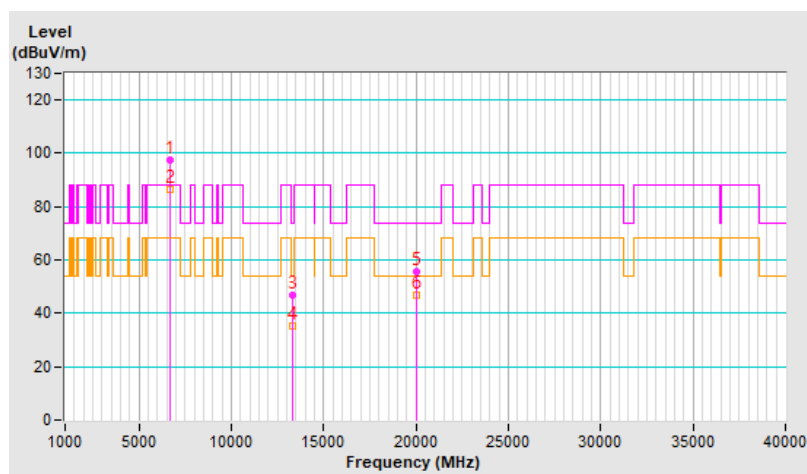


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.9 PK			1.74 V	81	89.1	7.8
2	*6665.00	85.1 AV			1.74 V	81	77.3	7.8
3	13330.00	47.5 PK	74.0	-26.5	1.00 V	259	32.2	15.3
4	13330.00	35.6 AV	54.0	-18.4	1.00 V	259	20.3	15.3
5	19995.00	56.4 PK	74.0	-17.6	2.26 V	164	60.8	-4.4
6	19995.00	45.2 AV	54.0	-8.8	2.26 V	164	49.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

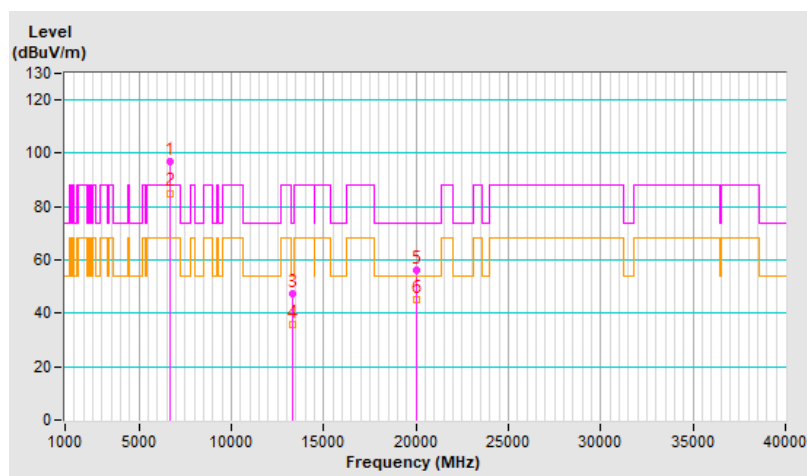


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.92 H	173	45.7	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.92 H	173	34.0	5.6
3	*5955.00	95.8 PK			1.92 H	173	90.3	5.5
4	*5955.00	86.3 AV			1.92 H	173	80.8	5.5
5	11910.00	46.5 PK	74.0	-27.5	1.49 H	66	31.9	14.6
6	11910.00	34.6 AV	54.0	-19.4	1.49 H	66	20.0	14.6
7	17865.00	56.4 PK	74.0	-17.6	1.96 H	360	30.5	25.9
8	17865.00	47.4 AV	54.0	-6.6	1.96 H	360	21.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

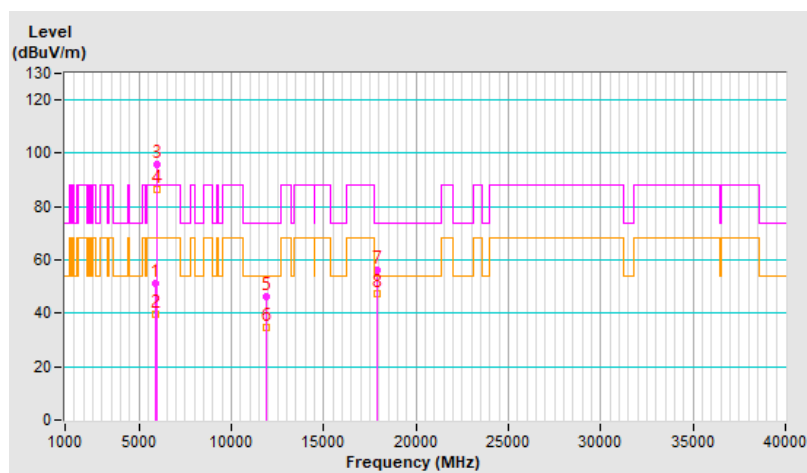


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.9 PK	88.2	-37.3	1.50 V	210	45.3	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.50 V	210	34.0	5.6
3	*5955.00	90.5 PK			1.50 V	210	85.0	5.5
4	*5955.00	81.6 AV			1.50 V	210	76.1	5.5
5	11910.00	46.8 PK	74.0	-27.2	1.04 V	241	32.2	14.6
6	11910.00	35.2 AV	54.0	-18.8	1.04 V	241	20.6	14.6
7	17865.00	56.2 PK	74.0	-17.8	2.25 V	156	30.3	25.9
8	17865.00	45.4 AV	54.0	-8.6	2.25 V	156	19.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

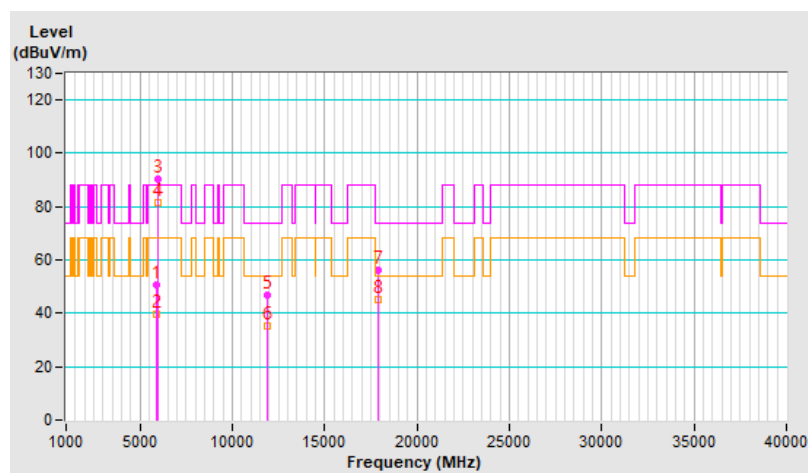


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.5 PK			1.86 H	188	89.7	5.8
2	*6195.00	86.0 AV			1.86 H	188	80.2	5.8
3	12390.00	46.9 PK	74.0	-27.1	1.54 H	83	32.2	14.7
4	12390.00	34.9 AV	54.0	-19.1	1.54 H	83	20.2	14.7
5	18585.00	54.9 PK	74.0	-19.1	1.91 H	360	60.4	-5.5
6	18585.00	46.4 AV	54.0	-7.6	1.91 H	360	51.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

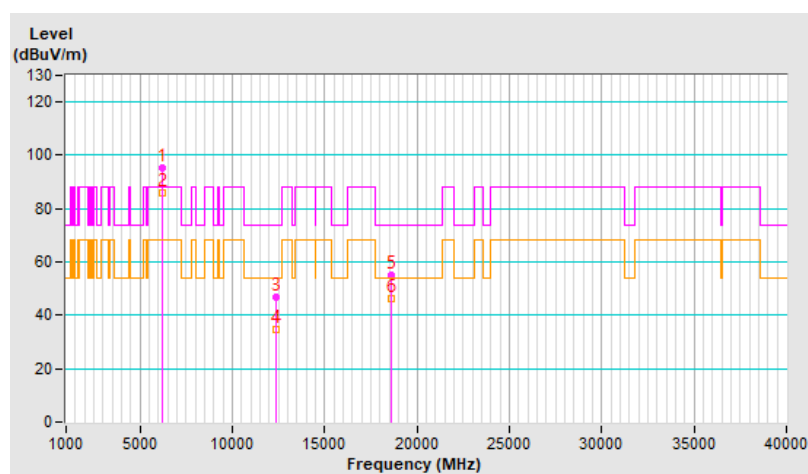


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	90.5 PK			1.47 V	220	84.7	5.8
2	*6195.00	81.7 AV			1.47 V	220	75.9	5.8
3	12390.00	47.4 PK	74.0	-26.6	1.00 V	246	32.7	14.7
4	12390.00	35.5 AV	54.0	-18.5	1.00 V	246	20.8	14.7
5	18585.00	56.2 PK	74.0	-17.8	2.21 V	154	61.7	-5.5
6	18585.00	45.0 AV	54.0	-9.0	2.21 V	154	50.5	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

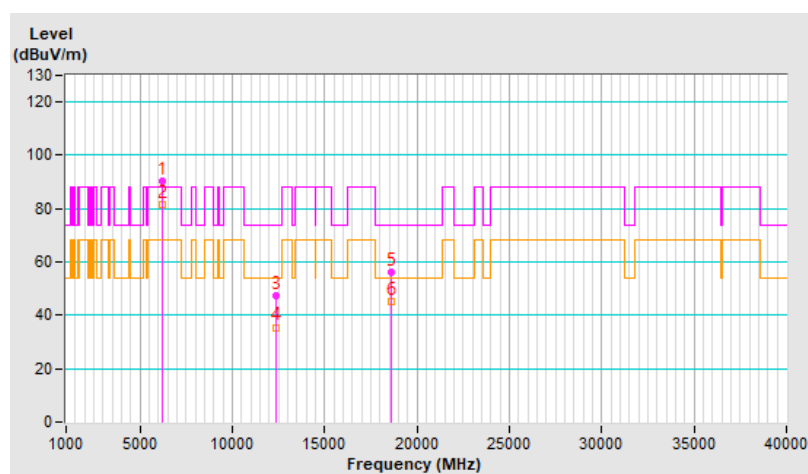


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.8 PK			1.89 H	182	89.0	6.8
2	*6415.00	86.2 AV			1.89 H	182	79.4	6.8
3	#12830.00	46.3 PK	88.2	-41.9	1.50 H	79	31.2	15.1
4	#12830.00	34.5 AV	68.2	-33.7	1.50 H	79	19.4	15.1
5	19245.00	56.1 PK	74.0	-17.9	1.95 H	360	60.7	-4.6
6	19245.00	47.4 AV	54.0	-6.6	1.95 H	360	52.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

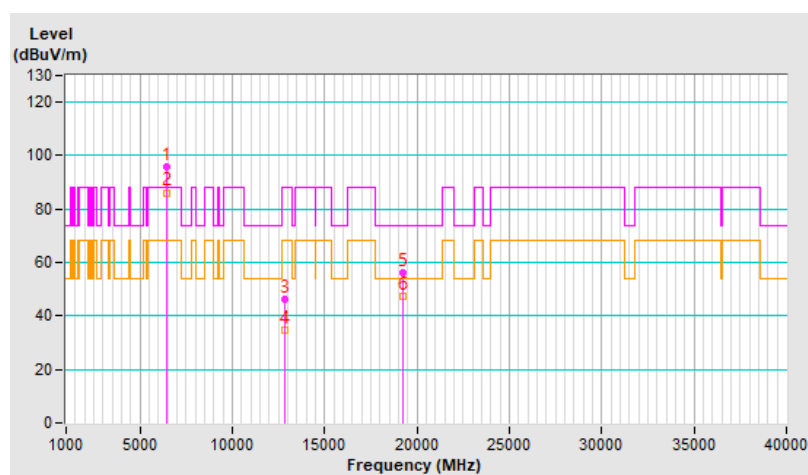


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	90.7 PK			1.51 V	210	83.9	6.8
2	*6415.00	81.8 AV			1.51 V	210	75.0	6.8
3	#12830.00	46.2 PK	88.2	-42.0	1.01 V	241	31.1	15.1
4	#12830.00	34.6 AV	68.2	-33.6	1.01 V	241	19.5	15.1
5	19245.00	55.6 PK	74.0	-18.4	2.22 V	180	60.2	-4.6
6	19245.00	44.9 AV	54.0	-9.1	2.22 V	180	49.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

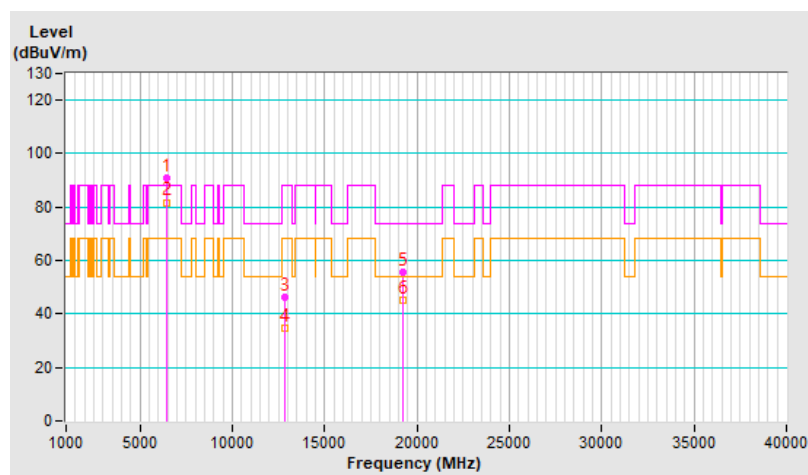


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.5 PK			1.86 H	164	88.1	7.4
2	*6535.00	86.2 AV			1.86 H	164	78.8	7.4
3	#13070.00	46.8 PK	88.2	-41.4	1.48 H	63	31.7	15.1
4	#13070.00	35.0 AV	68.2	-33.2	1.48 H	63	19.9	15.1
5	19605.00	55.9 PK	74.0	-18.1	1.95 H	360	60.7	-4.8
6	19605.00	47.3 AV	54.0	-6.7	1.95 H	360	52.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

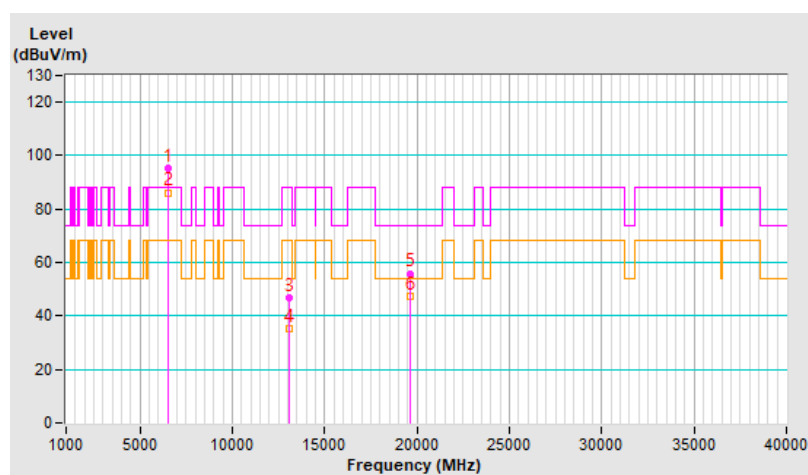


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.0 PK			1.49 V	223	83.6	7.4
2	*6535.00	81.8 AV			1.49 V	223	74.4	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.03 V	254	31.9	15.1
4	#13070.00	35.4 AV	68.2	-32.8	1.03 V	254	20.3	15.1
5	19605.00	56.0 PK	74.0	-18.0	2.25 V	159	60.8	-4.8
6	19605.00	45.1 AV	54.0	-8.9	2.25 V	159	49.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

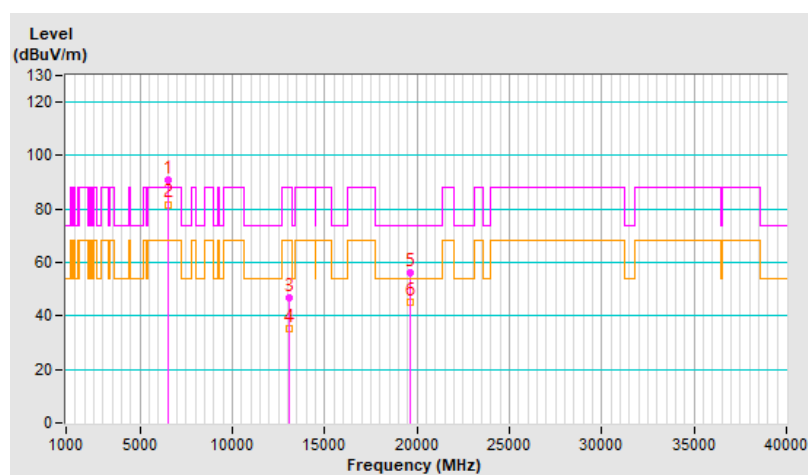


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.0 PK			1.98 H	177	88.3	7.7
2	*6695.00	86.6 AV			1.98 H	177	78.9	7.7
3	13390.00	47.4 PK	74.0	-26.6	1.48 H	79	32.0	15.4
4	13390.00	35.2 AV	54.0	-18.8	1.48 H	79	19.8	15.4
5	20085.00	56.1 PK	74.0	-17.9	1.94 H	360	60.4	-4.3
6	20085.00	47.4 AV	54.0	-6.6	1.94 H	360	51.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

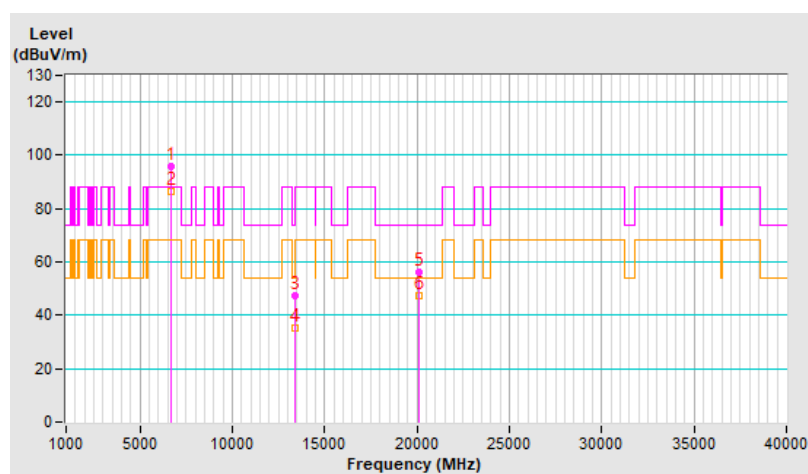


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	90.5 PK			1.44 V	214	82.8	7.7
2	*6695.00	81.9 AV			1.44 V	214	74.2	7.7
3	13390.00	47.2 PK	74.0	-26.8	1.00 V	242	31.8	15.4
4	13390.00	35.3 AV	54.0	-18.7	1.00 V	242	19.9	15.4
5	20085.00	56.3 PK	74.0	-17.7	2.21 V	165	60.6	-4.3
6	20085.00	45.3 AV	54.0	-8.7	2.21 V	165	49.6	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

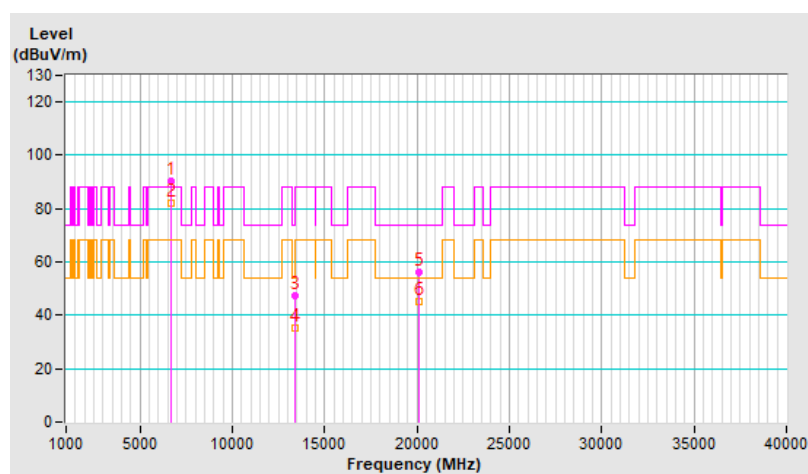


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.9 PK			1.89 H	168	87.7	8.2
2	*6855.00	87.4 AV			1.89 H	168	79.2	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.56 H	83	30.7	16.3
4	#13710.00	35.0 AV	68.2	-33.2	1.56 H	83	18.7	16.3
5	20565.00	55.4 PK	74.0	-18.6	1.92 H	360	59.1	-3.7
6	20565.00	46.7 AV	54.0	-7.3	1.92 H	360	50.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

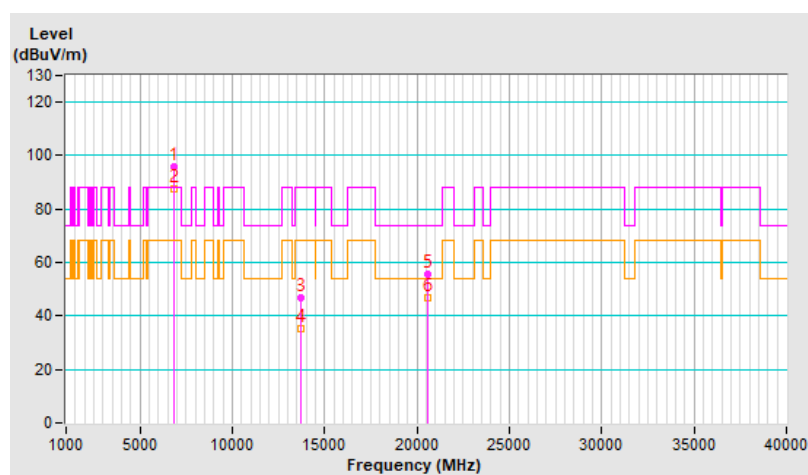


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.0 PK			1.62 V	50	86.8	8.2
2	*6855.00	82.7 AV			1.62 V	50	74.5	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.00 V	239	30.7	16.3
4	#13710.00	35.2 AV	68.2	-33.0	1.00 V	239	18.9	16.3
5	20565.00	55.8 PK	74.0	-18.2	2.20 V	179	59.5	-3.7
6	20565.00	44.8 AV	54.0	-9.2	2.20 V	179	48.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

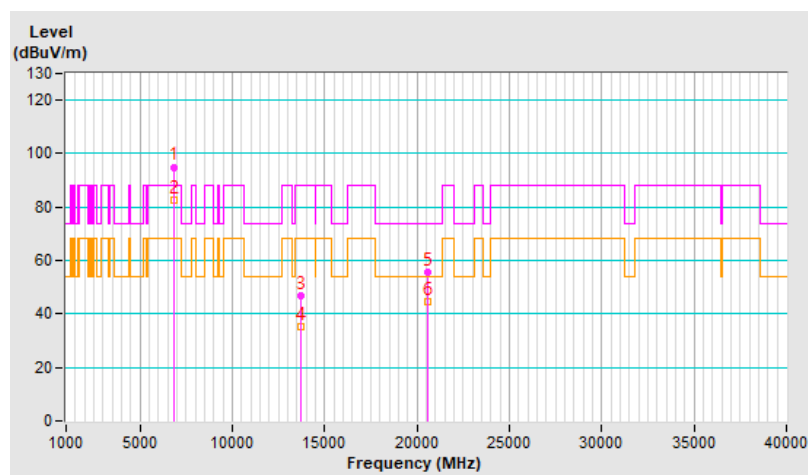


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.88 H	168	45.8	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.88 H	168	34.0	5.6
3	*5955.00	96.1 PK			1.88 H	168	90.6	5.5
4	*5955.00	86.5 AV			1.88 H	168	81.0	5.5
5	11910.00	46.5 PK	74.0	-27.5	1.56 H	81	31.9	14.6
6	11910.00	34.4 AV	54.0	-19.6	1.56 H	81	19.8	14.6
7	17865.00	55.5 PK	74.0	-18.5	1.91 H	360	29.6	25.9
8	17865.00	47.0 AV	54.0	-7.0	1.91 H	360	21.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

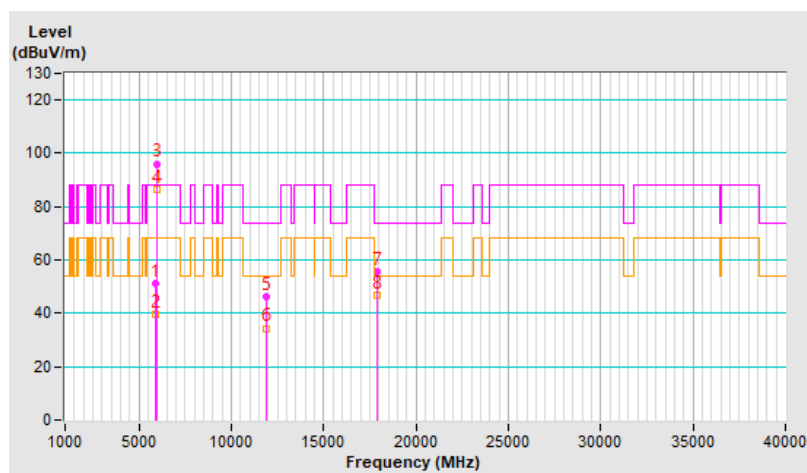


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.9 PK	88.2	-37.3	1.50 V	210	45.3	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.50 V	210	34.1	5.6
3	*5955.00	92.1 PK			1.50 V	210	86.6	5.5
4	*5955.00	81.2 AV			1.50 V	210	75.7	5.5
5	11910.00	46.5 PK	74.0	-27.5	1.03 V	249	31.9	14.6
6	11910.00	35.0 AV	54.0	-19.0	1.03 V	249	20.4	14.6
7	17865.00	56.5 PK	74.0	-17.5	2.23 V	158	30.6	25.9
8	17865.00	45.3 AV	54.0	-8.7	2.23 V	158	19.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

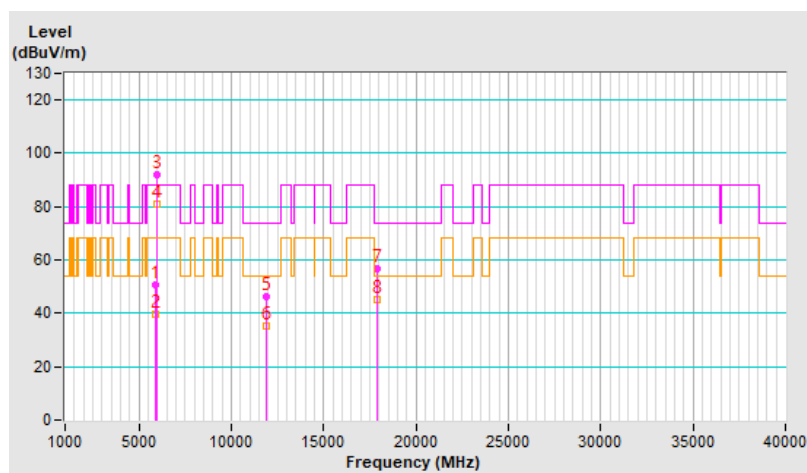


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.6 PK			1.89 H	172	89.8	5.8
2	*6195.00	86.1 AV			1.89 H	172	80.3	5.8
3	12390.00	46.3 PK	74.0	-27.7	1.55 H	92	31.6	14.7
4	12390.00	34.6 AV	54.0	-19.4	1.55 H	92	19.9	14.7
5	18585.00	55.3 PK	74.0	-18.7	1.92 H	360	60.8	-5.5
6	18585.00	46.4 AV	54.0	-7.6	1.92 H	360	51.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

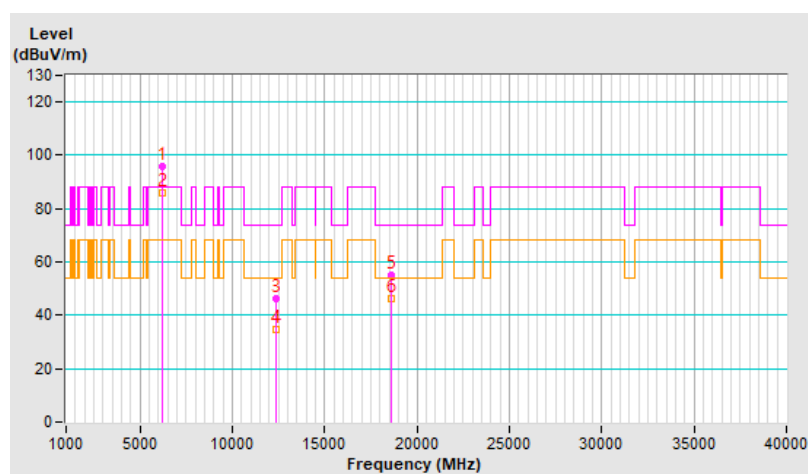


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	92.8 PK			1.46 V	206	87.0	5.8
2	*6195.00	81.6 AV			1.46 V	206	75.8	5.8
3	12390.00	46.7 PK	74.0	-27.3	1.00 V	238	32.0	14.7
4	12390.00	35.2 AV	54.0	-18.8	1.00 V	238	20.5	14.7
5	18585.00	56.1 PK	74.0	-17.9	2.23 V	181	61.6	-5.5
6	18585.00	45.2 AV	54.0	-8.8	2.23 V	181	50.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

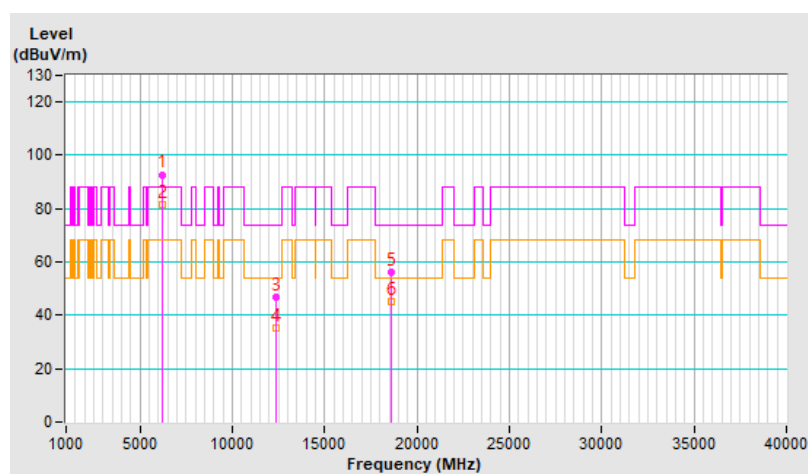


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.6 PK			1.93 H	163	89.8	6.8
2	*6415.00	86.8 AV			1.93 H	163	80.0	6.8
3	#12830.00	46.7 PK	88.2	-41.5	1.59 H	92	31.6	15.1
4	#12830.00	34.5 AV	68.2	-33.7	1.59 H	92	19.4	15.1
5	19245.00	55.2 PK	74.0	-18.8	1.95 H	360	59.8	-4.6
6	19245.00	46.7 AV	54.0	-7.3	1.95 H	360	51.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

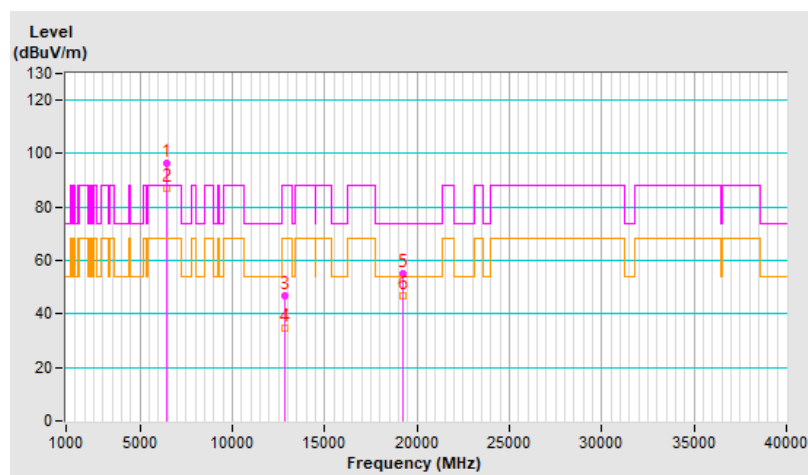


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.3 PK			1.46 V	210	85.5	6.8
2	*6415.00	81.4 AV			1.46 V	210	74.6	6.8
3	#12830.00	46.7 PK	88.2	-41.5	1.00 V	264	31.6	15.1
4	#12830.00	35.1 AV	68.2	-33.1	1.00 V	264	20.0	15.1
5	19245.00	56.4 PK	74.0	-17.6	2.17 V	152	61.0	-4.6
6	19245.00	45.5 AV	54.0	-8.5	2.17 V	152	50.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

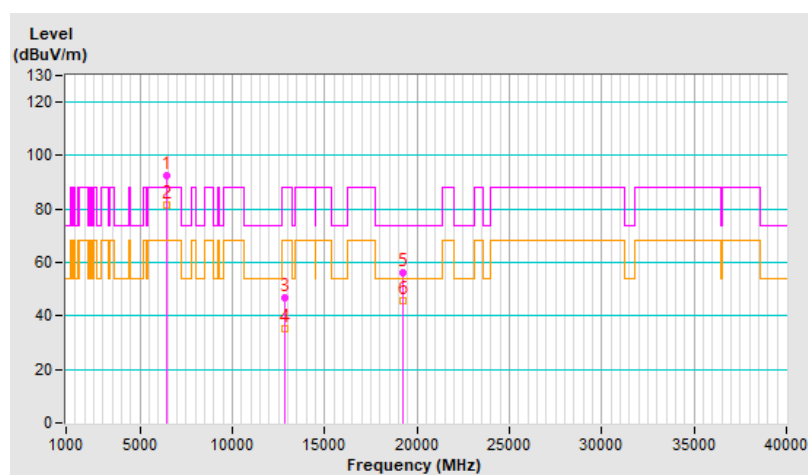


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.4 PK			1.85 H	177	89.0	7.4
2	*6535.00	86.8 AV			1.85 H	177	79.4	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.53 H	66	31.9	15.1
4	#13070.00	34.8 AV	68.2	-33.4	1.53 H	66	19.7	15.1
5	19605.00	55.4 PK	74.0	-18.6	1.98 H	360	60.2	-4.8
6	19605.00	46.9 AV	54.0	-7.1	1.98 H	360	51.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

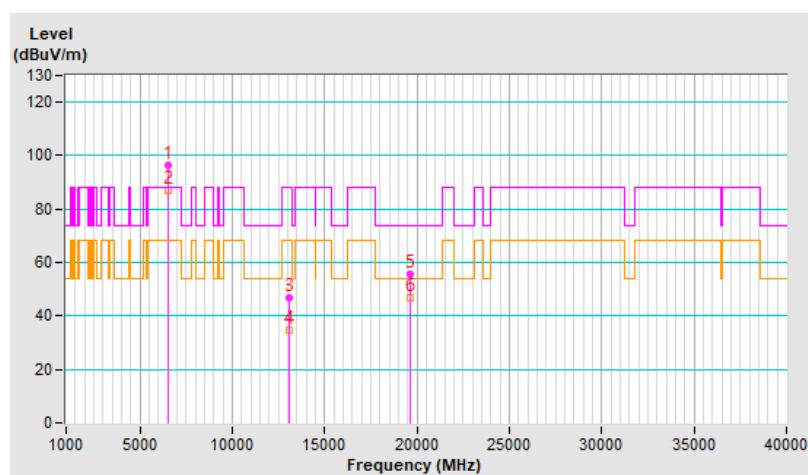


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.9 PK			1.46 V	215	84.5	7.4
2	*6535.00	81.0 AV			1.46 V	215	73.6	7.4
3	#13070.00	46.9 PK	88.2	-41.3	1.02 V	258	31.8	15.1
4	#13070.00	35.2 AV	68.2	-33.0	1.02 V	258	20.1	15.1
5	19605.00	55.8 PK	74.0	-18.2	2.24 V	166	60.6	-4.8
6	19605.00	44.8 AV	54.0	-9.2	2.24 V	166	49.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

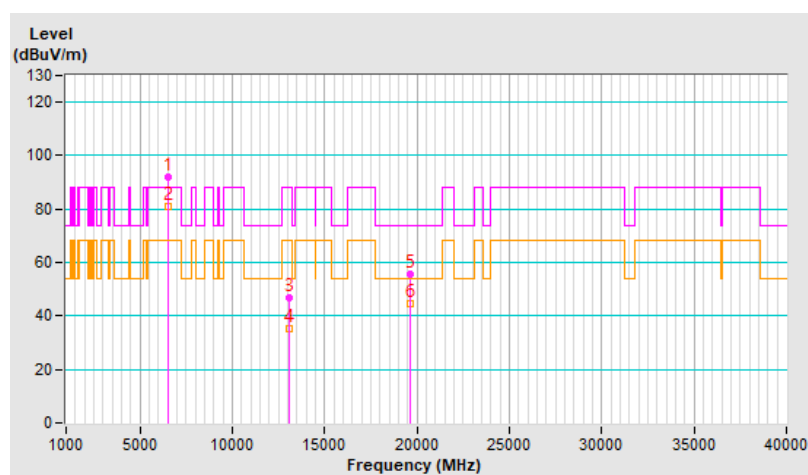


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.5 PK			1.86 H	156	88.8	7.7
2	*6695.00	86.8 AV			1.86 H	156	79.1	7.7
3	13390.00	46.8 PK	74.0	-27.2	1.50 H	82	31.4	15.4
4	13390.00	35.1 AV	54.0	-18.9	1.50 H	82	19.7	15.4
5	20085.00	55.2 PK	74.0	-18.8	1.96 H	360	59.5	-4.3
6	20085.00	46.5 AV	54.0	-7.5	1.96 H	360	50.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

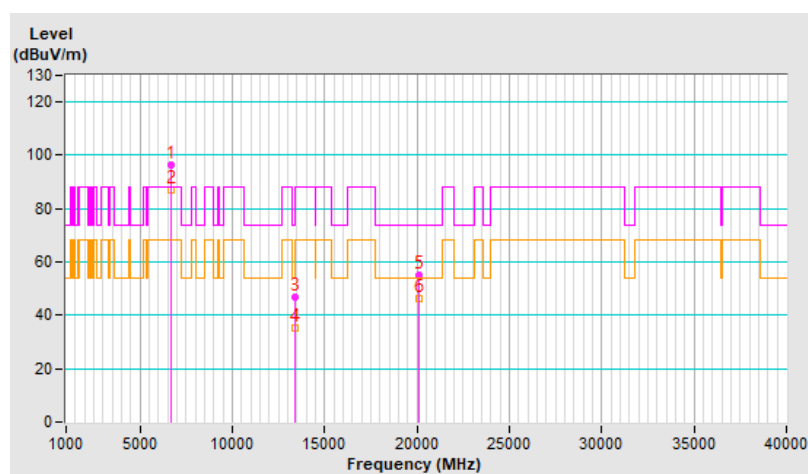


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	91.6 PK			1.50 V	221	83.9	7.7
2	*6695.00	80.8 AV			1.50 V	221	73.1	7.7
3	13390.00	46.8 PK	74.0	-27.2	1.00 V	252	31.4	15.4
4	13390.00	35.1 AV	54.0	-18.9	1.00 V	252	19.7	15.4
5	20085.00	56.7 PK	74.0	-17.3	2.22 V	164	61.0	-4.3
6	20085.00	45.5 AV	54.0	-8.5	2.22 V	164	49.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

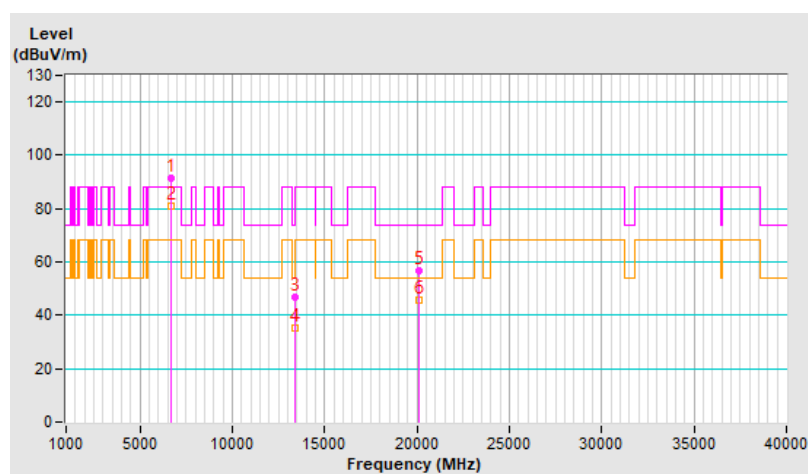


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.0 PK			1.91 H	166	88.8	8.2
2	*6855.00	87.4 AV			1.91 H	166	79.2	8.2
3	#13710.00	46.3 PK	88.2	-41.9	1.48 H	81	30.0	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.48 H	81	18.3	16.3
5	20565.00	56.2 PK	74.0	-17.8	1.89 H	360	59.9	-3.7
6	20565.00	47.3 AV	54.0	-6.7	1.89 H	360	51.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

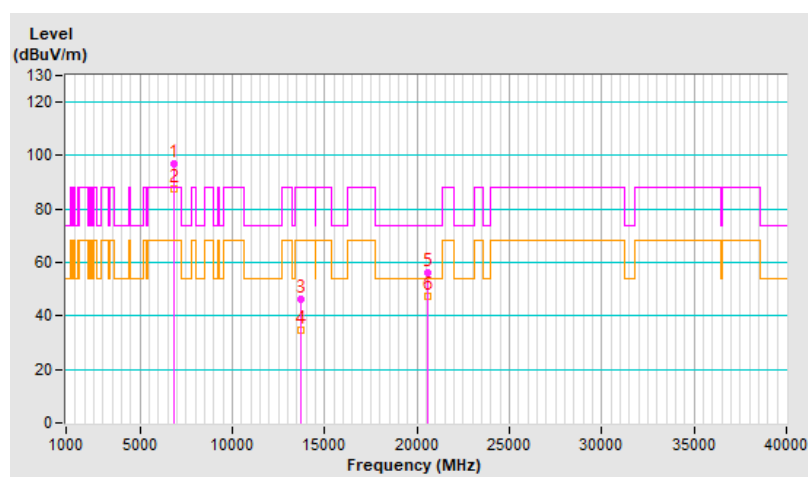


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.9 PK			1.84 V	51	83.7	8.2
2	*6855.00	82.5 AV			1.84 V	51	74.3	8.2
3	#13710.00	46.3 PK	88.2	-41.9	1.00 V	259	30.0	16.3
4	#13710.00	34.8 AV	68.2	-33.4	1.00 V	259	18.5	16.3
5	20565.00	55.7 PK	74.0	-18.3	2.20 V	154	59.4	-3.7
6	20565.00	44.9 AV	54.0	-9.1	2.20 V	154	48.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

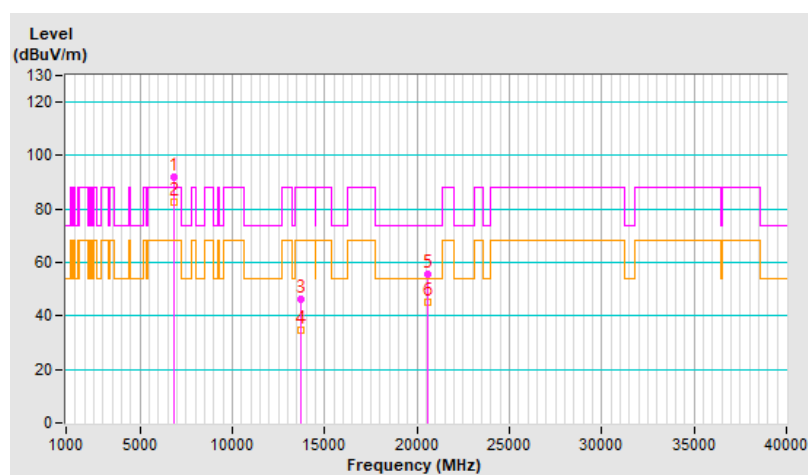


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	1.84 H	174	46.2	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.84 H	174	34.1	5.6
3	*5955.00	95.7 PK			1.84 H	174	90.2	5.5
4	*5955.00	86.6 AV			1.84 H	174	81.1	5.5
5	11910.00	47.0 PK	74.0	-27.0	1.51 H	75	32.4	14.6
6	11910.00	34.9 AV	54.0	-19.1	1.51 H	75	20.3	14.6
7	17865.00	55.6 PK	74.0	-18.4	1.97 H	360	29.7	25.9
8	17865.00	47.1 AV	54.0	-6.9	1.97 H	360	21.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

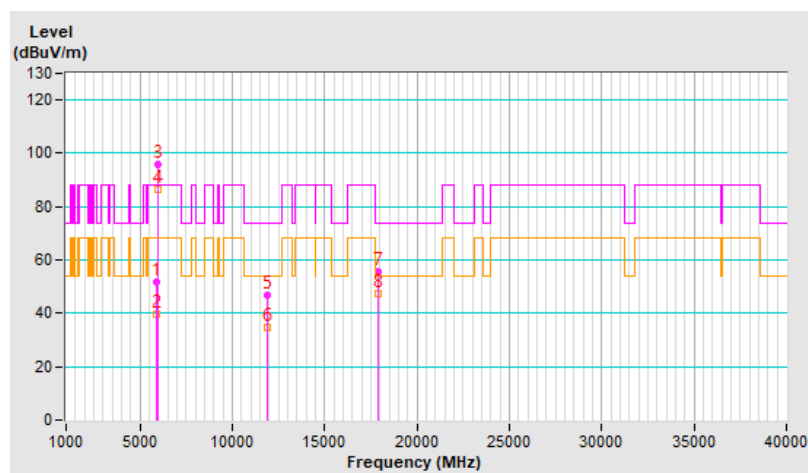


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.3 PK	88.2	-35.9	1.16 V	214	46.7	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.16 V	214	34.0	5.6
3	*5955.00	92.1 PK			1.16 V	214	86.6	5.5
4	*5955.00	81.6 AV			1.16 V	214	76.1	5.5
5	11910.00	46.4 PK	74.0	-27.6	1.05 V	260	31.8	14.6
6	11910.00	34.9 AV	54.0	-19.1	1.05 V	260	20.3	14.6
7	17865.00	55.4 PK	74.0	-18.6	2.26 V	166	29.5	25.9
8	17865.00	44.7 AV	54.0	-9.3	2.26 V	166	18.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

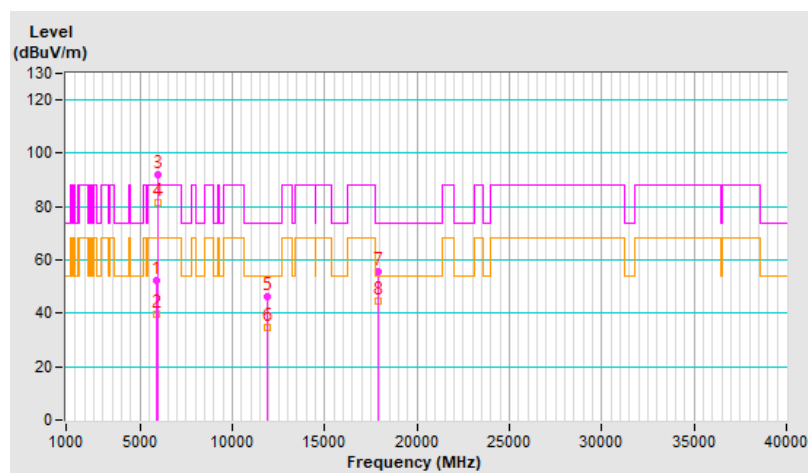


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.6 PK			1.86 H	182	89.8	5.8
2	*6195.00	86.6 AV			1.86 H	182	80.8	5.8
3	12390.00	46.2 PK	74.0	-27.8	1.48 H	80	31.5	14.7
4	12390.00	34.4 AV	54.0	-19.6	1.48 H	80	19.7	14.7
5	18585.00	55.2 PK	74.0	-18.8	1.93 H	360	60.7	-5.5
6	18585.00	46.7 AV	54.0	-7.3	1.93 H	360	52.2	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

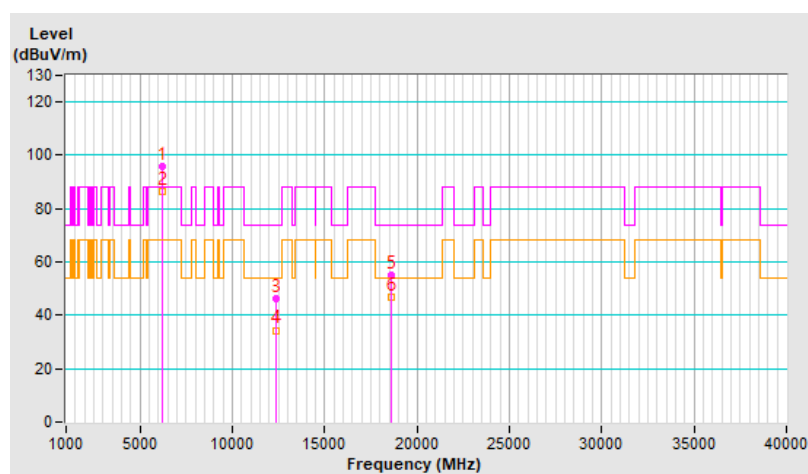


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	91.4 PK			1.14 V	206	85.6	5.8
2	*6195.00	81.1 AV			1.14 V	206	75.3	5.8
3	12390.00	46.7 PK	74.0	-27.3	1.01 V	261	32.0	14.7
4	12390.00	34.8 AV	54.0	-19.2	1.01 V	261	20.1	14.7
5	18585.00	56.5 PK	74.0	-17.5	2.18 V	150	62.0	-5.5
6	18585.00	45.6 AV	54.0	-8.4	2.18 V	150	51.1	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

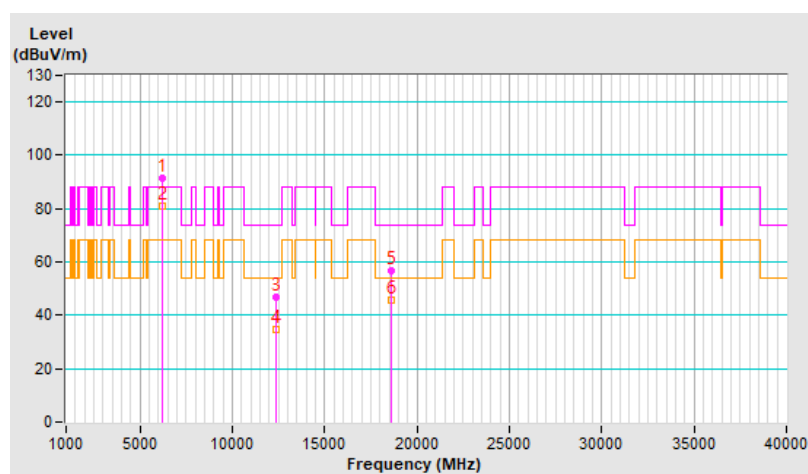


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.9 PK			1.78 H	172	89.1	6.8
2	*6415.00	87.0 AV			1.78 H	172	80.2	6.8
3	#12830.00	47.0 PK	88.2	-41.2	1.58 H	86	31.9	15.1
4	#12830.00	34.9 AV	68.2	-33.3	1.58 H	86	19.8	15.1
5	19245.00	56.2 PK	74.0	-17.8	1.92 H	360	60.8	-4.6
6	19245.00	47.3 AV	54.0	-6.7	1.92 H	360	51.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

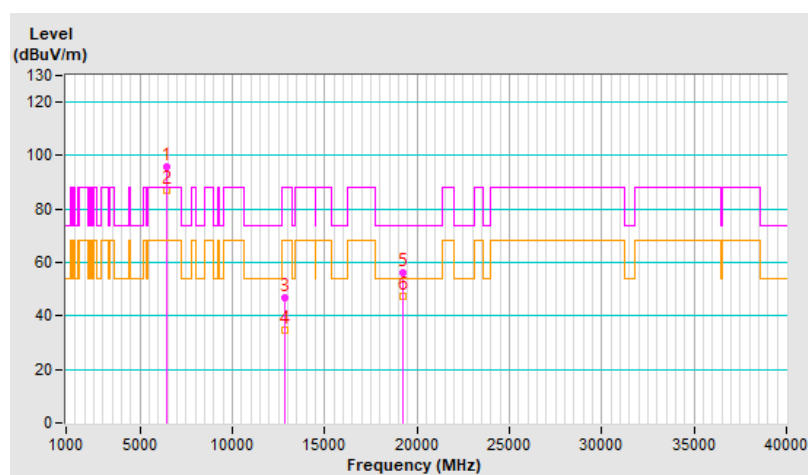


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.7 PK			1.11 V	224	84.9	6.8
2	*6415.00	81.4 AV			1.11 V	224	74.6	6.8
3	#12830.00	46.7 PK	88.2	-41.5	1.03 V	258	31.6	15.1
4	#12830.00	35.3 AV	68.2	-32.9	1.03 V	258	20.2	15.1
5	19245.00	56.0 PK	74.0	-18.0	2.26 V	169	60.6	-4.6
6	19245.00	45.1 AV	54.0	-8.9	2.26 V	169	49.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

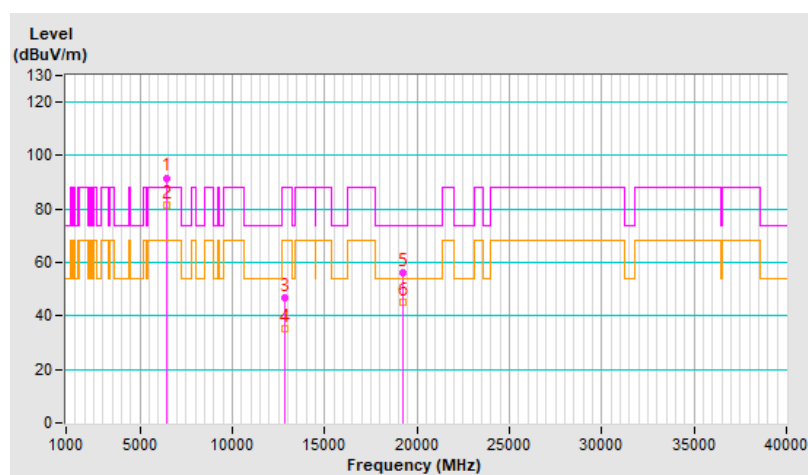


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.7 PK			1.80 H	188	88.3	7.4
2	*6535.00	86.7 AV			1.80 H	188	79.3	7.4
3	#13070.00	46.6 PK	88.2	-41.6	1.55 H	82	31.5	15.1
4	#13070.00	34.8 AV	68.2	-33.4	1.55 H	82	19.7	15.1
5	19605.00	56.1 PK	74.0	-17.9	1.98 H	360	60.9	-4.8
6	19605.00	47.3 AV	54.0	-6.7	1.98 H	360	52.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

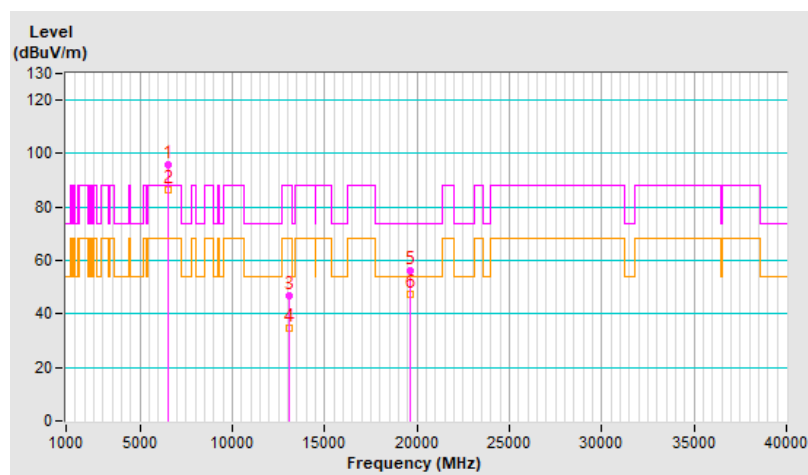


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.2 PK			1.14 V	200	84.8	7.4
2	*6535.00	81.5 AV			1.14 V	200	74.1	7.4
3	#13070.00	46.6 PK	88.2	-41.6	1.04 V	247	31.5	15.1
4	#13070.00	35.2 AV	68.2	-33.0	1.04 V	247	20.1	15.1
5	19605.00	55.7 PK	74.0	-18.3	2.15 V	163	60.5	-4.8
6	19605.00	44.9 AV	54.0	-9.1	2.15 V	163	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

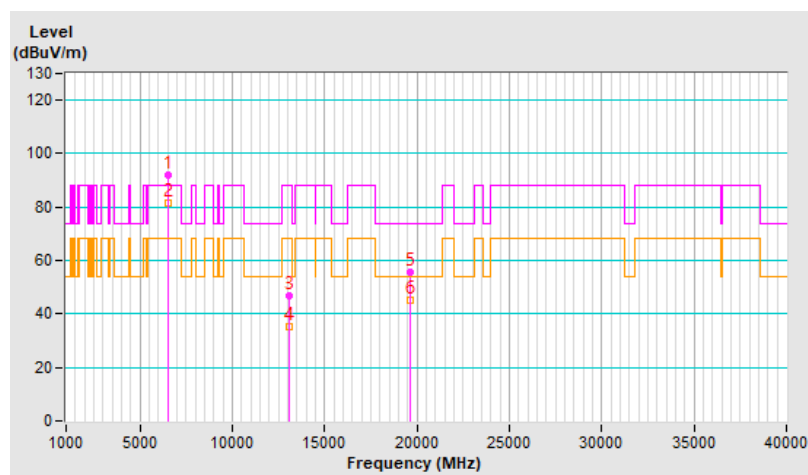


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.5 PK			1.80 H	184	87.8	7.7
2	*6695.00	86.5 AV			1.80 H	184	78.8	7.7
3	13390.00	46.5 PK	74.0	-27.5	1.49 H	82	31.1	15.4
4	13390.00	34.7 AV	54.0	-19.3	1.49 H	82	19.3	15.4
5	20085.00	55.4 PK	74.0	-18.6	1.98 H	360	59.7	-4.3
6	20085.00	46.5 AV	54.0	-7.5	1.98 H	360	50.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

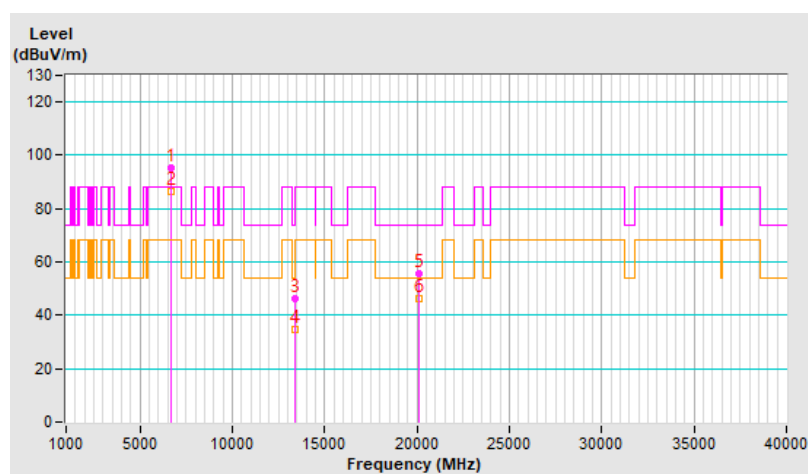


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.4 PK			1.12 V	200	84.7	7.7
2	*6695.00	81.6 AV			1.12 V	200	73.9	7.7
3	13390.00	46.8 PK	74.0	-27.2	1.02 V	261	31.4	15.4
4	13390.00	35.1 AV	54.0	-18.9	1.02 V	261	19.7	15.4
5	20085.00	56.7 PK	74.0	-17.3	2.21 V	182	61.0	-4.3
6	20085.00	45.6 AV	54.0	-8.4	2.21 V	182	49.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

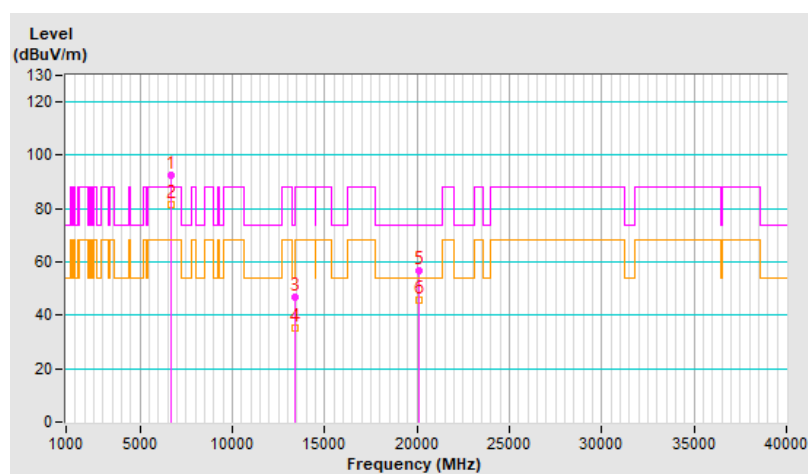


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.8 PK			1.90 H	166	89.6	8.2
2	*6855.00	87.9 AV			1.90 H	166	79.7	8.2
3	#13710.00	46.4 PK	88.2	-41.8	1.53 H	81	30.1	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.53 H	81	18.3	16.3
5	20565.00	55.7 PK	74.0	-18.3	1.94 H	360	59.4	-3.7
6	20565.00	46.9 AV	54.0	-7.1	1.94 H	360	50.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

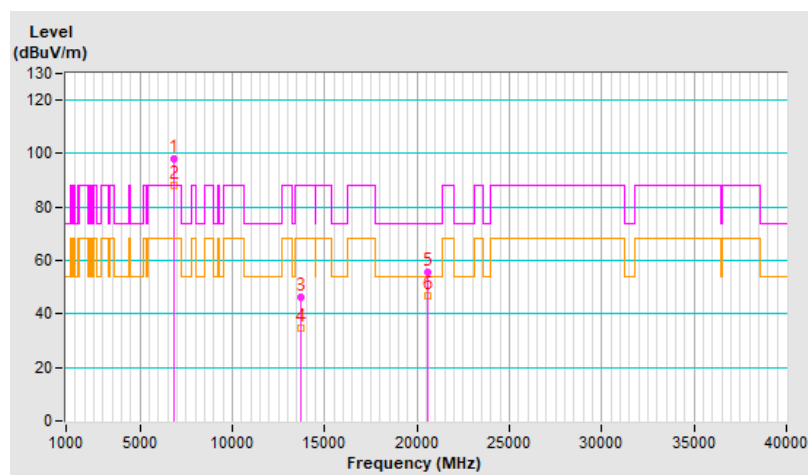


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.1 PK			1.76 V	52	86.9	8.2
2	*6855.00	82.4 AV			1.76 V	52	74.2	8.2
3	#13710.00	46.5 PK	88.2	-41.7	1.00 V	258	30.2	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.00 V	258	18.3	16.3
5	20565.00	56.3 PK	74.0	-17.7	2.27 V	157	60.0	-3.7
6	20565.00	45.2 AV	54.0	-8.8	2.27 V	157	48.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

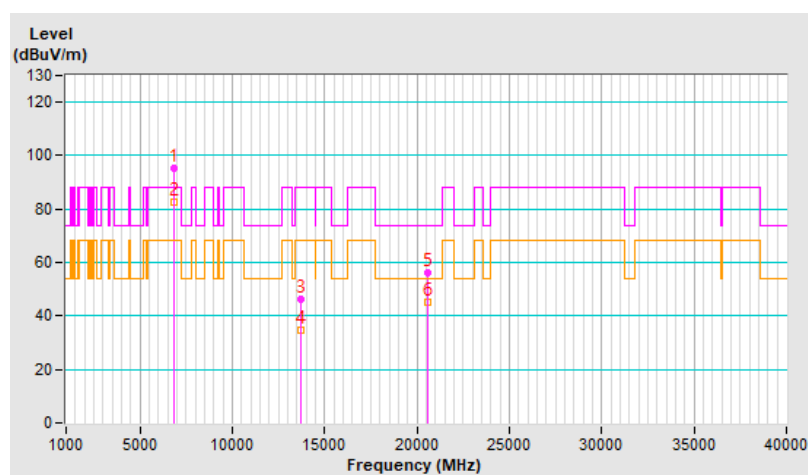


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.93 H	169	45.8	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.93 H	169	33.9	5.6
3	*5955.00	95.6 PK			1.93 H	169	90.1	5.5
4	*5955.00	86.6 AV			1.93 H	169	81.1	5.5
5	11910.00	46.5 PK	74.0	-27.5	1.57 H	80	31.9	14.6
6	11910.00	34.4 AV	54.0	-19.6	1.57 H	80	19.8	14.6
7	17865.00	56.1 PK	74.0	-17.9	1.93 H	360	30.2	25.9
8	17865.00	47.4 AV	54.0	-6.6	1.93 H	360	21.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

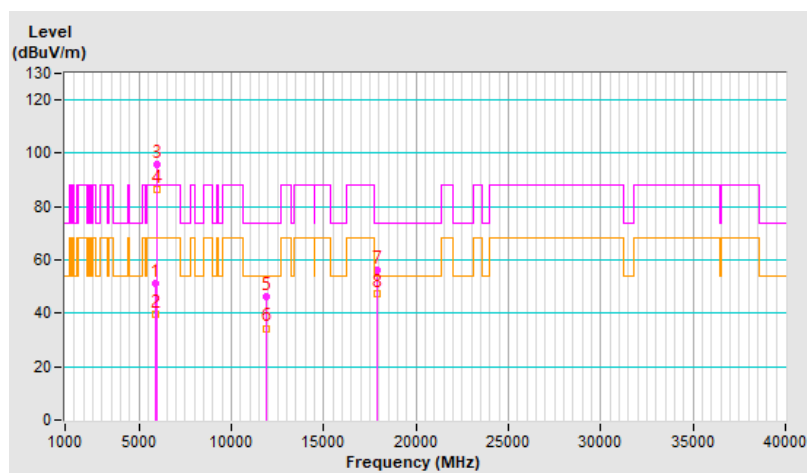


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.32 V	212	46.0	5.6
2	#5925.00	39.2 AV	68.2	-29.0	1.32 V	212	33.6	5.6
3	*5955.00	91.4 PK			1.32 V	212	85.9	5.5
4	*5955.00	80.8 AV			1.32 V	212	75.3	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.00 V	255	32.1	14.6
6	11910.00	35.2 AV	54.0	-18.8	1.00 V	255	20.6	14.6
7	17865.00	55.9 PK	74.0	-18.1	2.21 V	150	30.0	25.9
8	17865.00	45.2 AV	54.0	-8.8	2.21 V	150	19.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

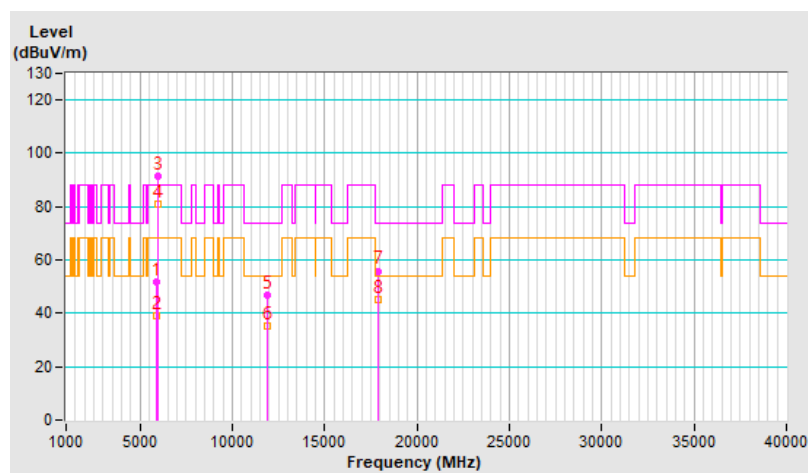


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.4 PK			1.94 H	166	88.6	6.8
2	*6415.00	86.2 AV			1.94 H	166	79.4	6.8
3	#12830.00	46.6 PK	88.2	-41.6	1.54 H	69	31.5	15.1
4	#12830.00	34.7 AV	68.2	-33.5	1.54 H	69	19.6	15.1
5	19245.00	55.5 PK	74.0	-18.5	1.93 H	360	60.1	-4.6
6	19245.00	46.9 AV	54.0	-7.1	1.93 H	360	51.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

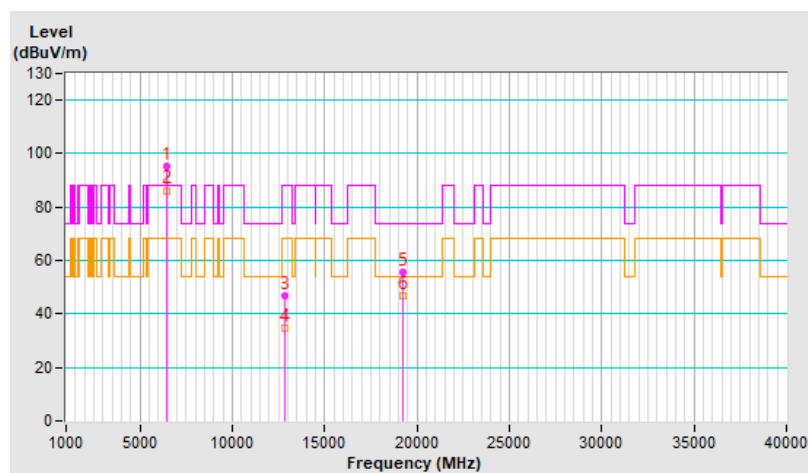


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.5 PK			1.29 V	208	84.7	6.8
2	*6415.00	80.8 AV			1.29 V	208	74.0	6.8
3	#12830.00	47.2 PK	88.2	-41.0	1.04 V	243	32.1	15.1
4	#12830.00	35.4 AV	68.2	-32.8	1.04 V	243	20.3	15.1
5	19245.00	56.0 PK	74.0	-18.0	2.19 V	178	60.6	-4.6
6	19245.00	45.0 AV	54.0	-9.0	2.19 V	178	49.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

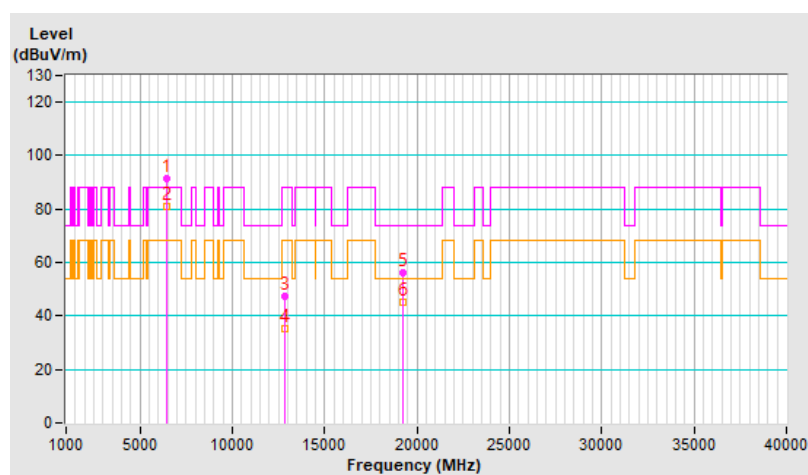


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.9 PK			1.94 H	180	88.5	7.4
2	*6535.00	86.8 AV			1.94 H	180	79.4	7.4
3	#13070.00	46.3 PK	88.2	-41.9	1.54 H	72	31.2	15.1
4	#13070.00	34.4 AV	68.2	-33.8	1.54 H	72	19.3	15.1
5	19605.00	56.2 PK	74.0	-17.8	1.97 H	360	61.0	-4.8
6	19605.00	47.4 AV	54.0	-6.6	1.97 H	360	52.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

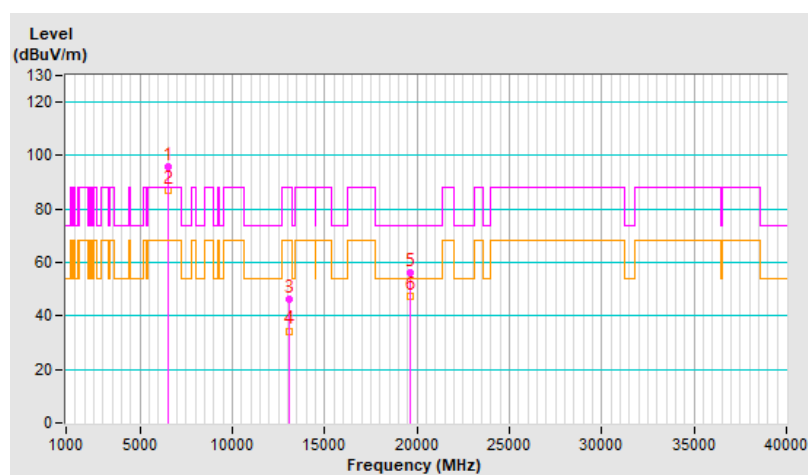


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.2 PK			1.32 V	205	83.8	7.4
2	*6535.00	80.6 AV			1.32 V	205	73.2	7.4
3	#13070.00	47.1 PK	88.2	-41.1	1.00 V	261	32.0	15.1
4	#13070.00	35.5 AV	68.2	-32.7	1.00 V	261	20.4	15.1
5	19605.00	56.6 PK	74.0	-17.4	2.27 V	180	61.4	-4.8
6	19605.00	45.7 AV	54.0	-8.3	2.27 V	180	50.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

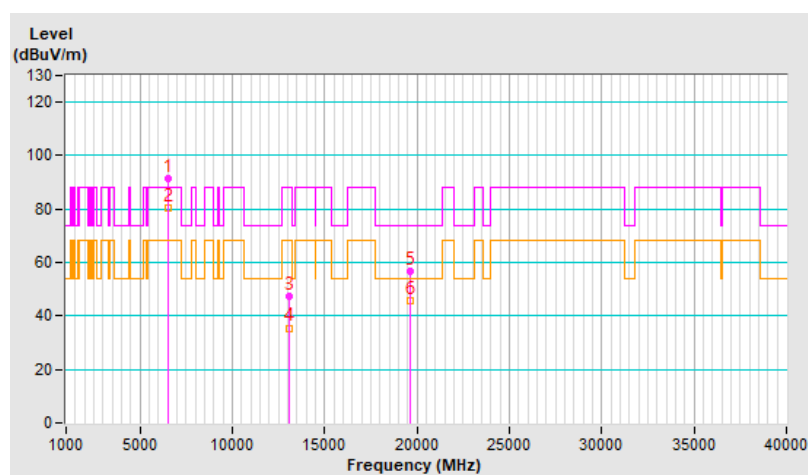


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.3 PK			1.90 H	166	86.1	8.2
2	*6855.00	84.6 AV			1.90 H	166	76.4	8.2
3	#13710.00	46.4 PK	88.2	-41.8	1.53 H	87	30.1	16.3
4	#13710.00	34.4 AV	68.2	-33.8	1.53 H	87	18.1	16.3
5	20565.00	56.2 PK	74.0	-17.8	1.90 H	360	59.9	-3.7
6	20565.00	47.3 AV	54.0	-6.7	1.90 H	360	51.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

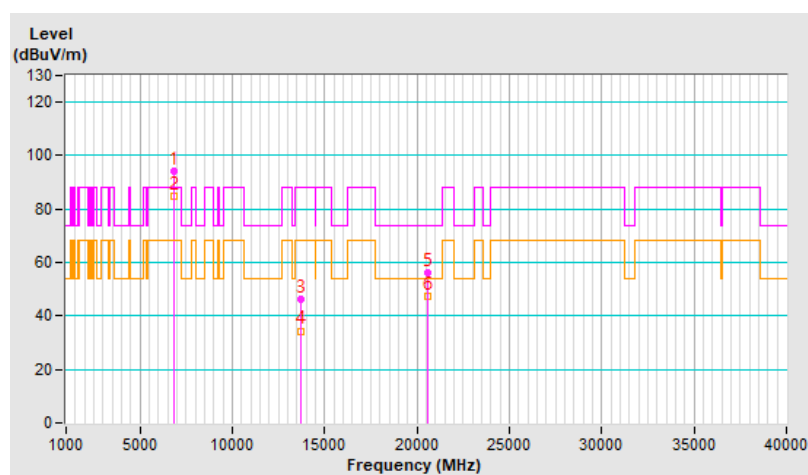


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	89.2 PK			1.85 V	52	81.0	8.2
2	*6855.00	79.3 AV			1.85 V	52	71.1	8.2
3	#13710.00	46.3 PK	88.2	-41.9	1.00 V	241	30.0	16.3
4	#13710.00	34.8 AV	68.2	-33.4	1.00 V	241	18.5	16.3
5	20565.00	56.5 PK	74.0	-17.5	2.20 V	178	60.2	-3.7
6	20565.00	45.4 AV	54.0	-8.6	2.20 V	178	49.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

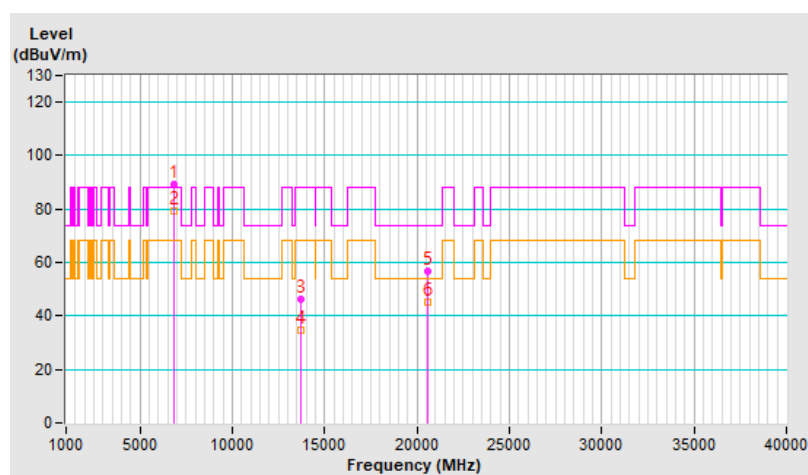


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.93 H	168	45.5	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.93 H	168	34.1	5.6
3	*5955.00	98.8 PK			1.93 H	168	93.3	5.5
4	*5955.00	87.4 AV			1.93 H	168	81.9	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.52 H	84	31.6	14.6
6	11910.00	34.5 AV	54.0	-19.5	1.52 H	84	19.9	14.6
7	17865.00	56.1 PK	74.0	-17.9	1.98 H	360	30.2	25.9
8	17865.00	47.1 AV	54.0	-6.9	1.98 H	360	21.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

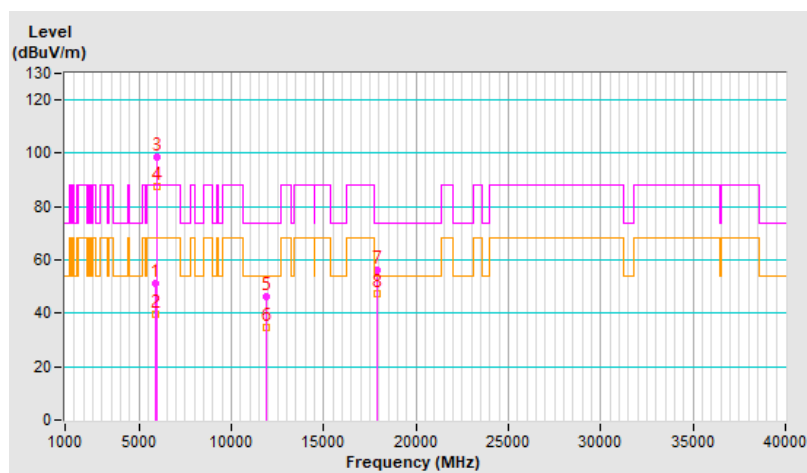


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.7 PK	88.2	-37.5	1.31 V	211	45.1	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.31 V	211	33.9	5.6
3	*5955.00	91.8 PK			1.31 V	211	86.3	5.5
4	*5955.00	50.7 AV			1.31 V	211	45.2	5.5
5	11910.00	46.8 PK	74.0	-27.2	1.00 V	268	32.2	14.6
6	11910.00	35.3 AV	54.0	-18.7	1.00 V	268	20.7	14.6
7	17865.00	56.2 PK	74.0	-17.8	2.26 V	162	30.3	25.9
8	17865.00	45.4 AV	54.0	-8.6	2.26 V	162	19.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

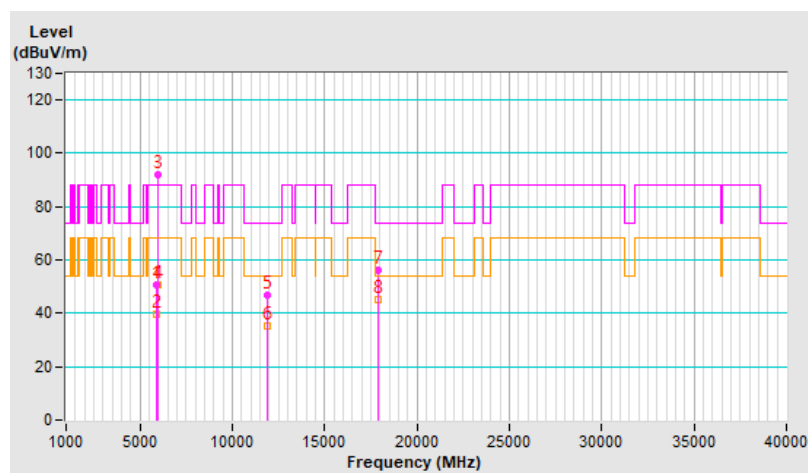


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	98.9 PK			1.88 H	168	92.1	6.8
2	*6415.00	87.5 AV			1.88 H	168	80.7	6.8
3	#12830.00	46.9 PK	88.2	-41.3	1.51 H	71	31.8	15.1
4	#12830.00	35.1 AV	68.2	-33.1	1.51 H	71	20.0	15.1
5	19245.00	55.8 PK	74.0	-18.2	1.99 H	360	60.4	-4.6
6	19245.00	47.3 AV	54.0	-6.7	1.99 H	360	51.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

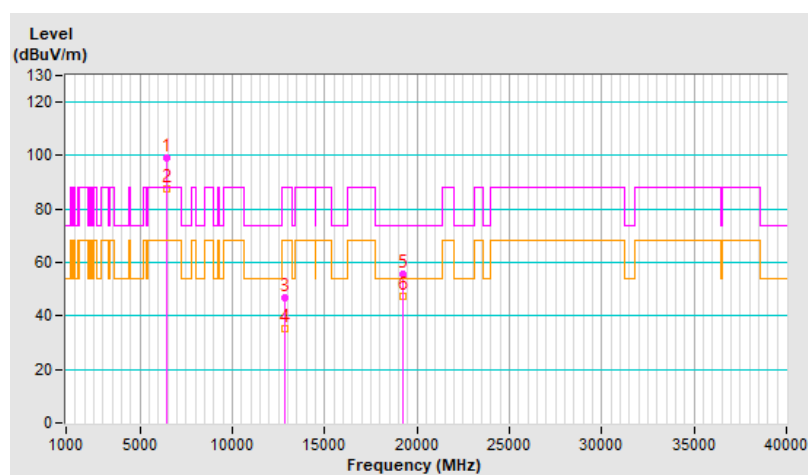


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.0 PK			1.32 V	199	85.2	6.8
2	*6415.00	51.0 AV			1.32 V	199	44.2	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.02 V	266	31.4	15.1
4	#12830.00	35.2 AV	68.2	-33.0	1.02 V	266	20.1	15.1
5	19245.00	55.6 PK	74.0	-18.4	2.17 V	161	60.2	-4.6
6	19245.00	44.9 AV	54.0	-9.1	2.17 V	161	49.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

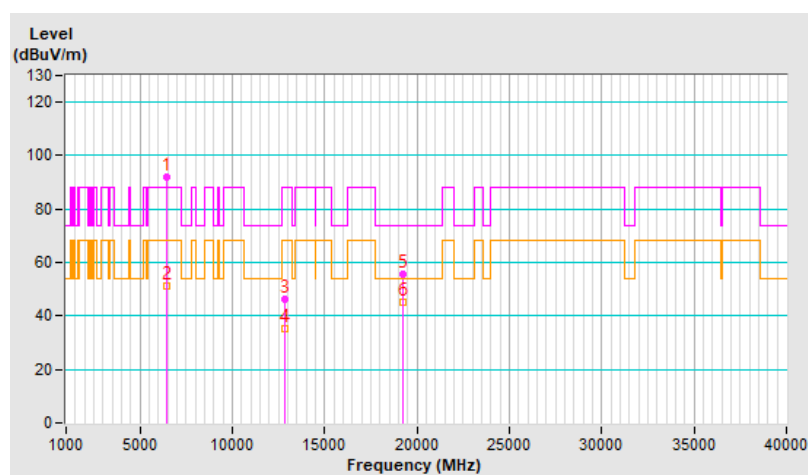


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	99.0 PK			1.98 H	168	91.6	7.4
2	*6535.00	87.4 AV			1.98 H	168	80.0	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.57 H	91	31.9	15.1
4	#13070.00	35.0 AV	68.2	-33.2	1.57 H	91	19.9	15.1
5	19605.00	55.3 PK	74.0	-18.7	1.95 H	360	60.1	-4.8
6	19605.00	46.6 AV	54.0	-7.4	1.95 H	360	51.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

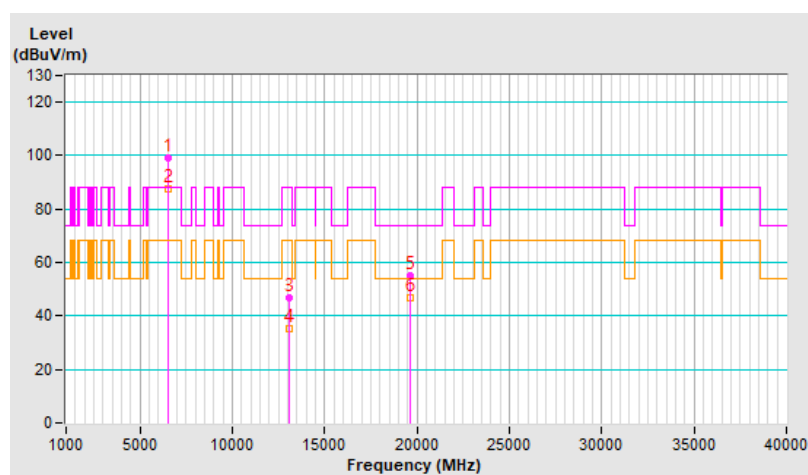


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.2 PK			1.28 V	197	84.8	7.4
2	*6535.00	50.8 AV			1.28 V	197	43.4	7.4
3	#13070.00	46.5 PK	88.2	-41.7	1.06 V	243	31.4	15.1
4	#13070.00	34.8 AV	68.2	-33.4	1.06 V	243	19.7	15.1
5	19605.00	55.5 PK	74.0	-18.5	2.25 V	171	60.3	-4.8
6	19605.00	44.7 AV	54.0	-9.3	2.25 V	171	49.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

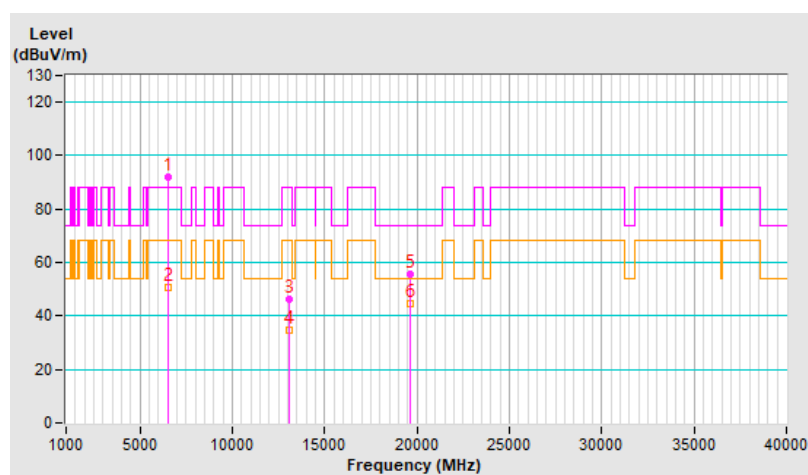


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	100.4 PK			1.92 H	169	92.2	8.2
2	*6855.00	87.1 AV			1.92 H	169	78.9	8.2
3	#13710.00	46.7 PK	88.2	-41.5	1.52 H	73	30.4	16.3
4	#13710.00	34.8 AV	68.2	-33.4	1.52 H	73	18.5	16.3
5	20565.00	55.5 PK	74.0	-18.5	1.96 H	360	59.2	-3.7
6	20565.00	46.9 AV	54.0	-7.1	1.96 H	360	50.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

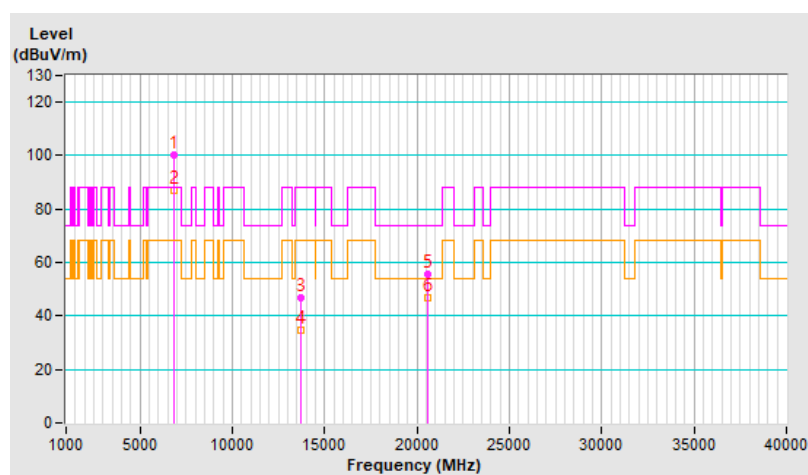


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.5 PK			1.60 V	50	85.3	8.2
2	*6855.00	82.1 AV			1.60 V	50	73.9	8.2
3	#13710.00	46.6 PK	88.2	-41.6	1.07 V	245	30.3	16.3
4	#13710.00	35.2 AV	68.2	-33.0	1.07 V	245	18.9	16.3
5	20565.00	56.3 PK	74.0	-17.7	2.19 V	182	60.0	-3.7
6	20565.00	45.2 AV	54.0	-8.8	2.19 V	182	48.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

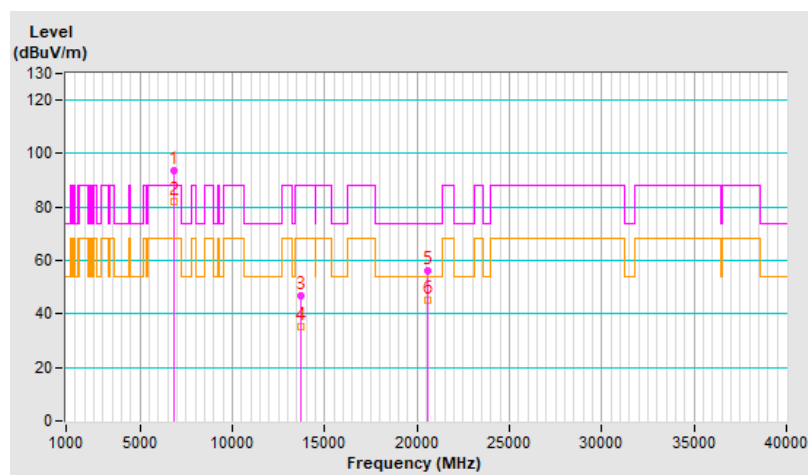


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.94 H	172	45.7	5.6
2	#5925.00	39.9 AV	68.2	-28.3	1.94 H	172	34.3	5.6
3	*5985.00	97.3 PK			1.94 H	172	91.8	5.5
4	*5985.00	87.5 AV			1.94 H	172	82.0	5.5
5	11970.00	46.4 PK	74.0	-27.6	1.53 H	93	31.9	14.5
6	11970.00	34.3 AV	54.0	-19.7	1.53 H	93	19.8	14.5
7	17955.00	55.5 PK	74.0	-18.5	1.88 H	360	27.2	28.3
8	17955.00	47.0 AV	54.0	-7.0	1.88 H	360	18.7	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

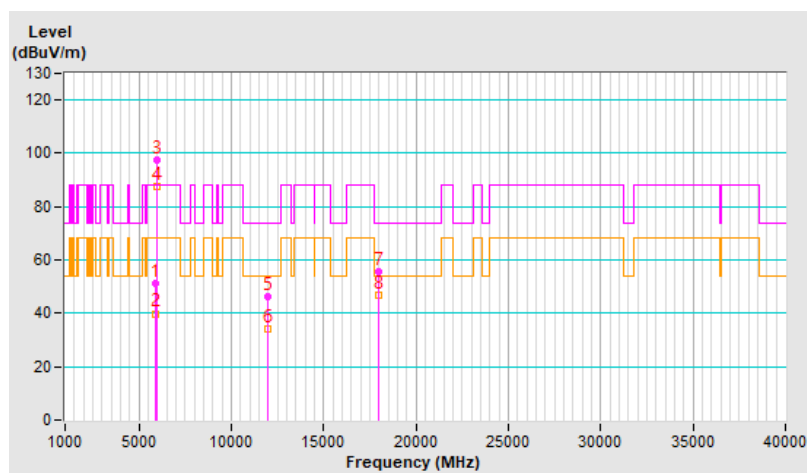


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.22 V	212	45.9	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.22 V	212	34.2	5.6
3	*5985.00	93.0 PK			1.22 V	212	87.5	5.5
4	*5985.00	82.1 AV			1.22 V	212	76.6	5.5
5	11970.00	46.9 PK	74.0	-27.1	1.06 V	245	32.4	14.5
6	11970.00	35.1 AV	54.0	-18.9	1.06 V	245	20.6	14.5
7	17955.00	56.0 PK	74.0	-18.0	2.16 V	160	27.7	28.3
8	17955.00	45.2 AV	54.0	-8.8	2.16 V	160	16.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

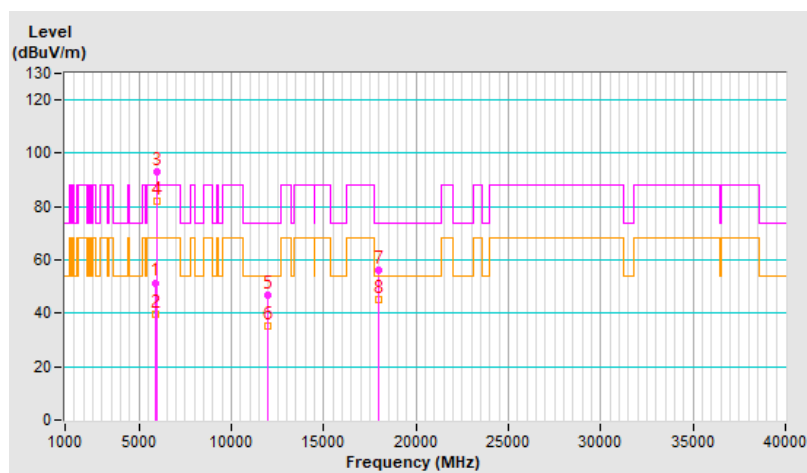


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	97.5 PK			1.91 H	164	90.9	6.6
2	*6385.00	87.7 AV			1.91 H	164	81.1	6.6
3	#12770.00	47.0 PK	88.2	-41.2	1.55 H	65	32.1	14.9
4	#12770.00	35.2 AV	68.2	-33.0	1.55 H	65	20.3	14.9
5	19155.00	55.6 PK	74.0	-18.4	1.99 H	360	60.3	-4.7
6	19155.00	47.1 AV	54.0	-6.9	1.99 H	360	51.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

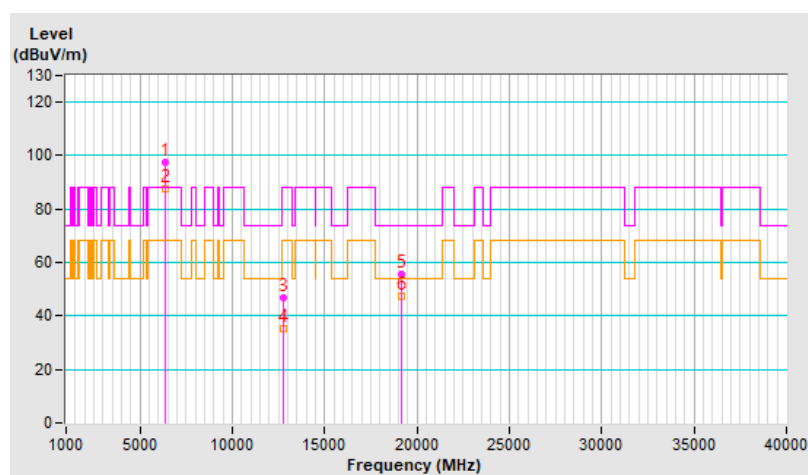


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	93.0 PK			1.17 V	199	86.4	6.6
2	*6385.00	82.2 AV			1.17 V	199	75.6	6.6
3	#12770.00	46.6 PK	88.2	-41.6	1.02 V	255	31.7	14.9
4	#12770.00	35.2 AV	68.2	-33.0	1.02 V	255	20.3	14.9
5	19155.00	56.5 PK	74.0	-17.5	2.21 V	158	61.2	-4.7
6	19155.00	45.6 AV	54.0	-8.4	2.21 V	158	50.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

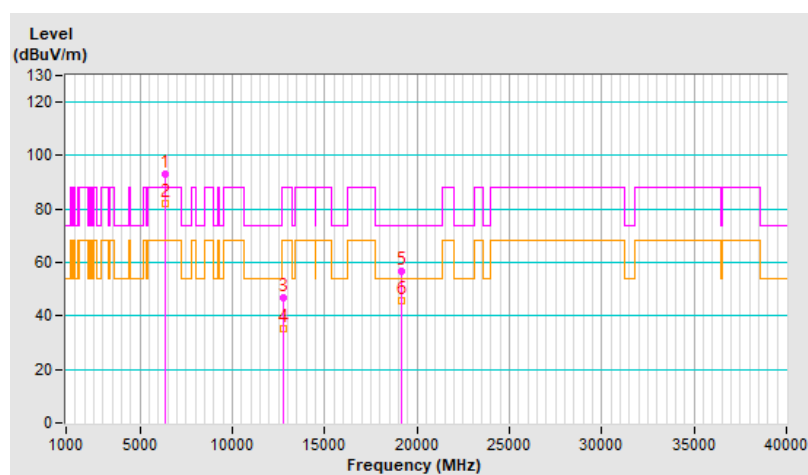


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	97.9 PK			1.98 H	166	90.1	7.8
2	*6625.00	87.8 AV			1.98 H	166	80.0	7.8
3	13250.00	46.4 PK	74.0	-27.6	1.55 H	83	31.0	15.4
4	13250.00	34.6 AV	54.0	-19.4	1.55 H	83	19.2	15.4
5	19875.00	55.3 PK	74.0	-18.7	1.98 H	360	59.8	-4.5
6	19875.00	46.5 AV	54.0	-7.5	1.98 H	360	51.0	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

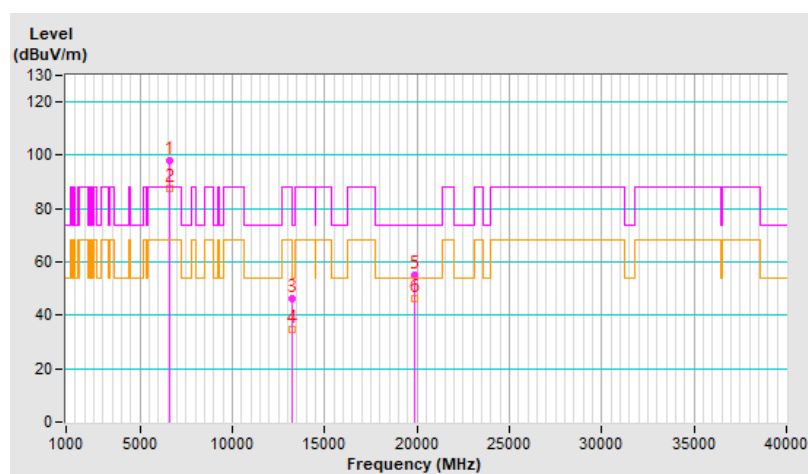


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	92.7 PK			1.21 V	217	84.9	7.8
2	*6625.00	81.6 AV			1.21 V	217	73.8	7.8
3	13250.00	46.9 PK	74.0	-27.1	1.02 V	254	31.5	15.4
4	13250.00	35.1 AV	54.0	-18.9	1.02 V	254	19.7	15.4
5	19875.00	56.7 PK	74.0	-17.3	2.21 V	181	61.2	-4.5
6	19875.00	45.5 AV	54.0	-8.5	2.21 V	181	50.0	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

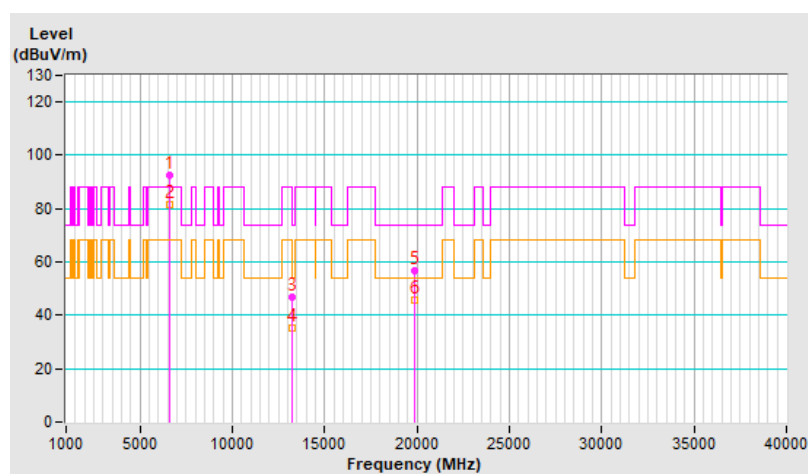


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	98.9 PK			1.89 H	170	91.2	7.7
2	*6785.00	86.9 AV			1.89 H	170	79.2	7.7
3	#13570.00	46.4 PK	88.2	-41.8	1.51 H	74	30.7	15.7
4	#13570.00	34.5 AV	68.2	-33.7	1.51 H	74	18.8	15.7
5	20355.00	55.3 PK	74.0	-18.7	1.97 H	360	59.1	-3.8
6	20355.00	46.7 AV	54.0	-7.3	1.97 H	360	50.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

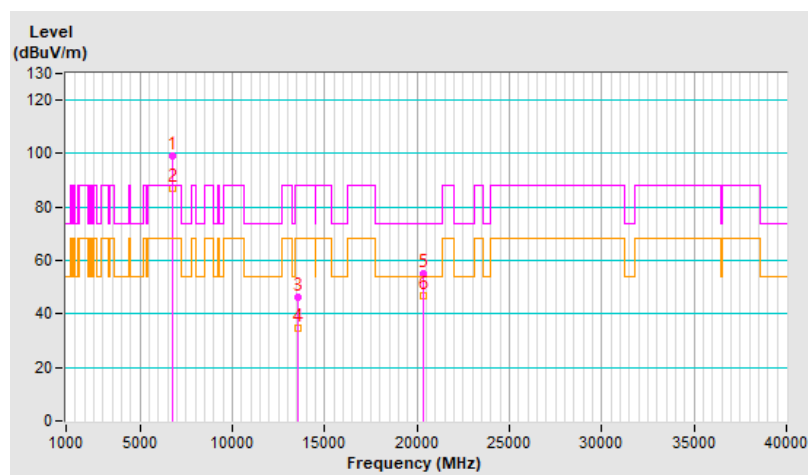


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	94.5 PK			1.60 V	85	86.8	7.7
2	*6785.00	82.1 AV			1.60 V	85	74.4	7.7
3	#13570.00	46.9 PK	88.2	-41.3	1.00 V	244	31.2	15.7
4	#13570.00	35.2 AV	68.2	-33.0	1.00 V	244	19.5	15.7
5	20355.00	56.2 PK	74.0	-17.8	2.19 V	157	60.0	-3.8
6	20355.00	45.1 AV	54.0	-8.9	2.19 V	157	48.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

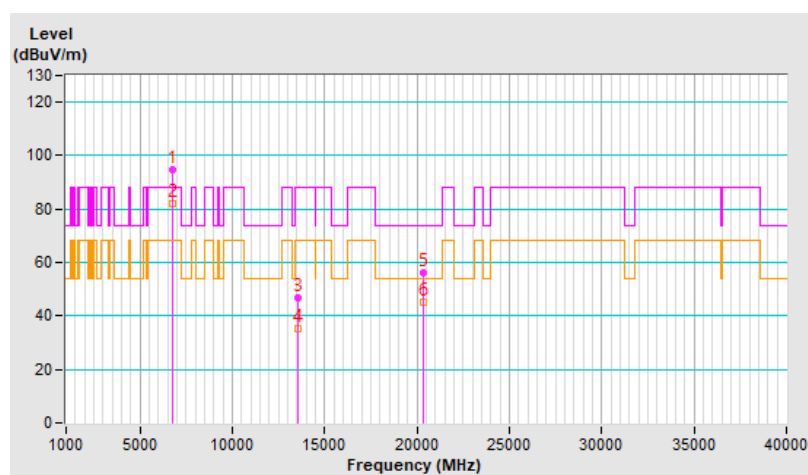


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.6 PK	88.2	-25.6	1.88 H	168	57.0	5.6
2	#5925.00	45.9 AV	68.2	-22.3	1.88 H	168	40.3	5.6
3	*6025.00	100.3 PK			1.88 H	168	94.7	5.6
4	*6025.00	87.8 AV			1.88 H	168	82.2	5.6
5	12050.00	46.6 PK	74.0	-27.4	1.54 H	89	32.0	14.6
6	12050.00	34.9 AV	54.0	-19.1	1.54 H	89	20.3	14.6
7	18075.00	55.9 PK	74.0	-18.1	1.95 H	360	61.2	-5.3
8	18075.00	46.9 AV	54.0	-7.1	1.95 H	360	52.2	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

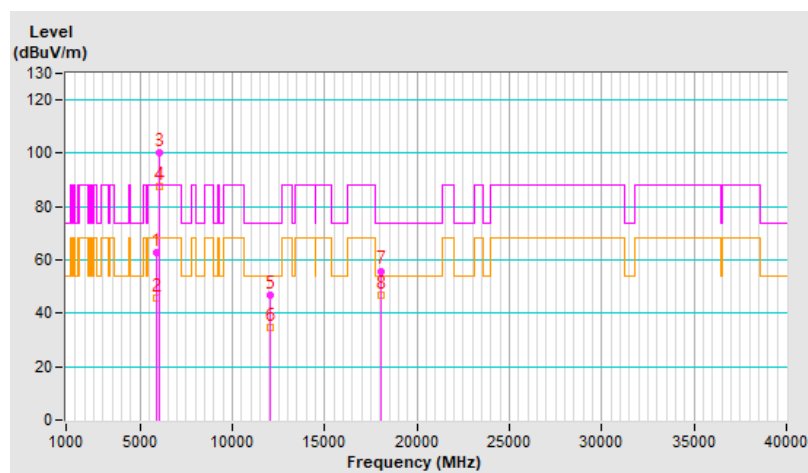


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.9 PK	88.2	-33.3	1.40 V	211	49.3	5.6
2	#5925.00	42.5 AV	68.2	-25.7	1.40 V	211	36.9	5.6
3	*6025.00	93.2 PK			1.40 V	211	87.6	5.6
4	*6025.00	81.5 AV			1.40 V	211	75.9	5.6
5	12050.00	46.9 PK	74.0	-27.1	1.07 V	263	32.3	14.6
6	12050.00	35.1 AV	54.0	-18.9	1.07 V	263	20.5	14.6
7	18075.00	56.8 PK	74.0	-17.2	2.25 V	177	62.1	-5.3
8	18075.00	45.6 AV	54.0	-8.4	2.25 V	177	50.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

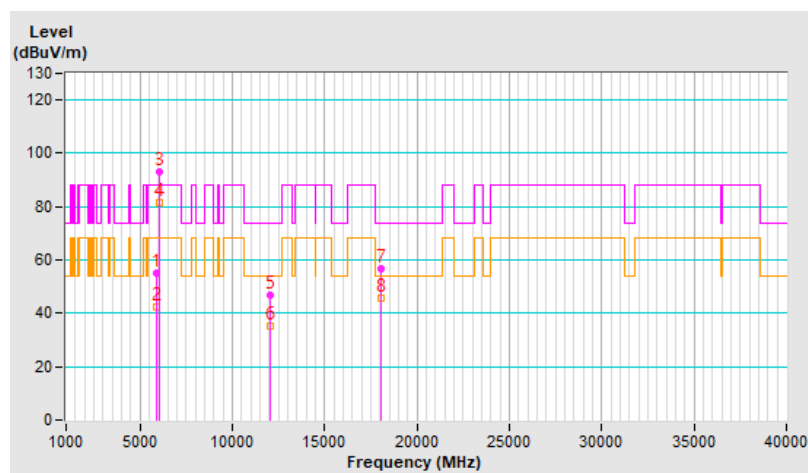


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	100.7 PK			1.85 H	179	94.3	6.4
2	*6345.00	88.2 AV			1.85 H	179	81.8	6.4
3	12690.00	46.6 PK	74.0	-27.4	1.56 H	75	31.7	14.9
4	12690.00	34.4 AV	54.0	-19.6	1.56 H	75	19.5	14.9
5	19035.00	56.2 PK	74.0	-17.8	1.98 H	360	61.1	-4.9
6	19035.00	47.4 AV	54.0	-6.6	1.98 H	360	52.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

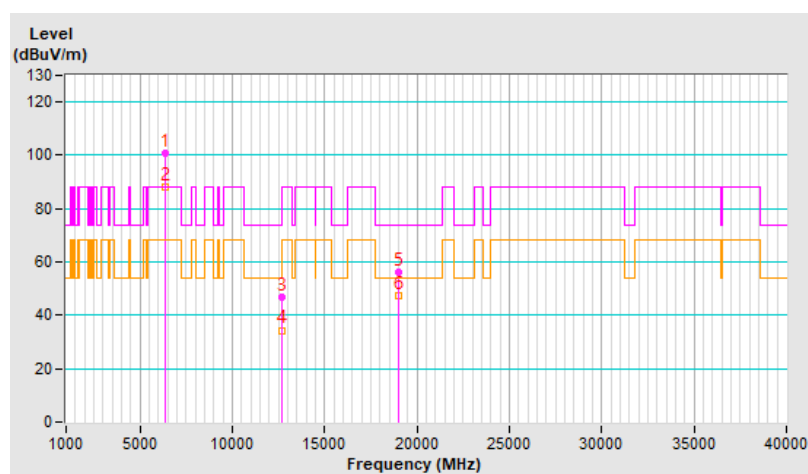


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	93.0 PK			1.24 V	206	86.6	6.4
2	*6345.00	82.1 AV			1.24 V	206	75.7	6.4
3	12690.00	46.4 PK	74.0	-27.6	1.00 V	246	31.5	14.9
4	12690.00	34.6 AV	54.0	-19.4	1.00 V	246	19.7	14.9
5	19035.00	56.4 PK	74.0	-17.6	2.19 V	156	61.3	-4.9
6	19035.00	45.6 AV	54.0	-8.4	2.19 V	156	50.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

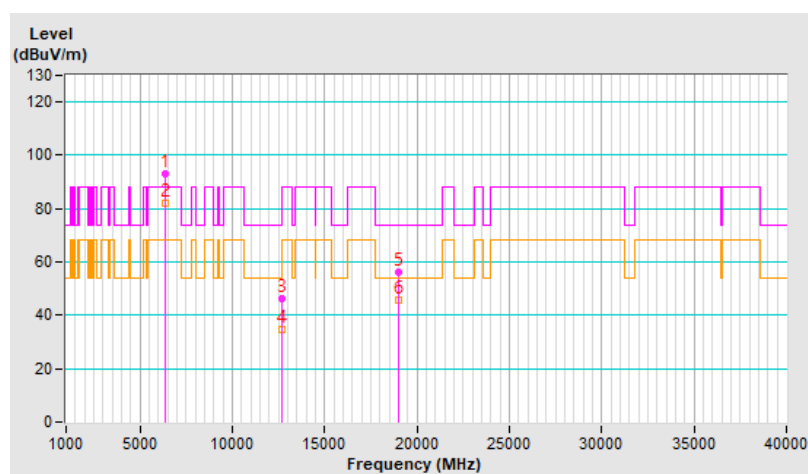


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.4 PK			1.98 H	167	92.6	7.8
2	*6665.00	89.2 AV			1.98 H	167	81.4	7.8
3	13330.00	47.2 PK	74.0	-26.8	1.58 H	78	31.9	15.3
4	13330.00	35.1 AV	54.0	-18.9	1.58 H	78	19.8	15.3
5	19995.00	56.2 PK	74.0	-17.8	1.87 H	360	60.6	-4.4
6	19995.00	47.2 AV	54.0	-6.8	1.87 H	360	51.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

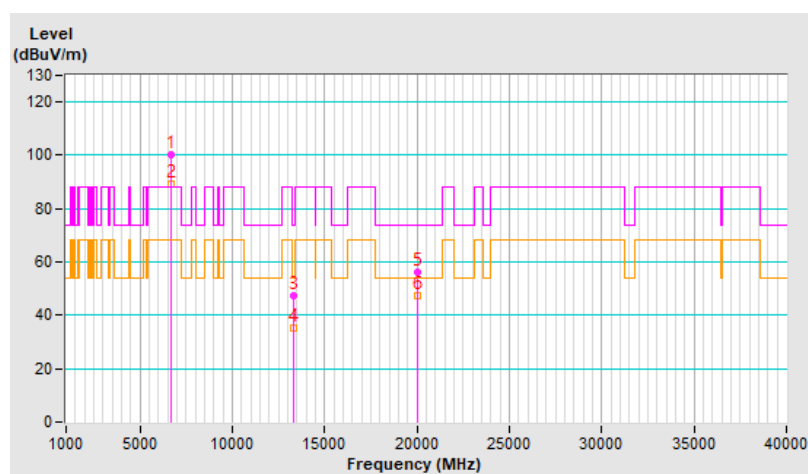


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	95.5 PK			1.62 V	194	87.7	7.8
2	*6665.00	83.5 AV			1.62 V	194	75.7	7.8
3	13330.00	46.7 PK	74.0	-27.3	1.07 V	246	31.4	15.3
4	13330.00	34.9 AV	54.0	-19.1	1.07 V	246	19.6	15.3
5	19995.00	56.7 PK	74.0	-17.3	2.17 V	155	61.1	-4.4
6	19995.00	45.6 AV	54.0	-8.4	2.17 V	155	50.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

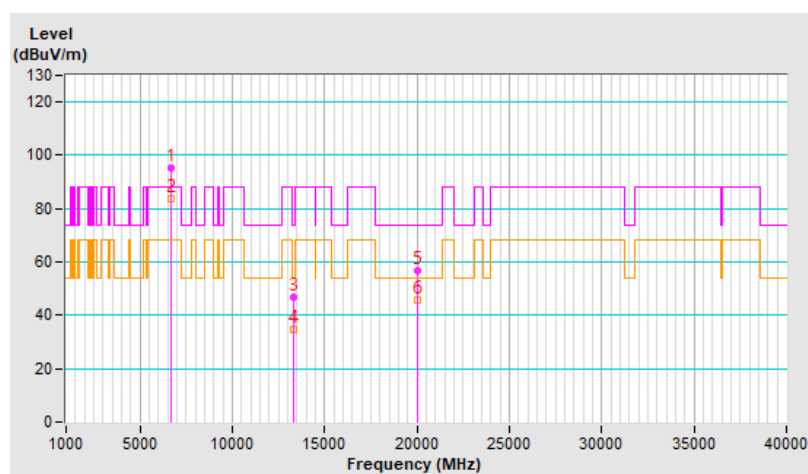


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.8 PK	88.2	-29.4	1.98 H	170	53.2	5.6
2	#5925.00	46.7 AV	68.2	-21.5	1.98 H	170	41.1	5.6
3	*6025.00	99.4 PK			1.98 H	170	93.8	5.6
4	*6025.00	88.1 AV			1.98 H	170	82.5	5.6
5	12050.00	47.2 PK	74.0	-26.8	1.53 H	82	32.6	14.6
6	12050.00	35.2 AV	54.0	-18.8	1.53 H	82	20.6	14.6
7	18075.00	55.5 PK	74.0	-18.5	1.95 H	360	60.8	-5.3
8	18075.00	46.8 AV	54.0	-7.2	1.95 H	360	52.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

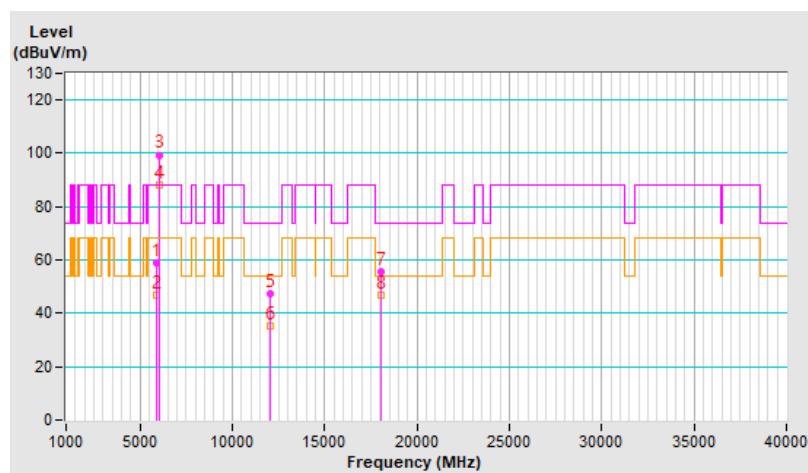


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.0 PK	88.2	-30.2	1.00 V	0	52.4	5.6
2	#5925.00	42.9 AV	68.2	-25.3	1.00 V	0	37.3	5.6
3	*6025.00	95.1 PK			1.12 V	212	89.5	5.6
4	*6025.00	83.4 AV			1.12 V	212	77.8	5.6
5	12050.00	46.4 PK	74.0	-27.6	1.05 V	268	31.8	14.6
6	12050.00	34.9 AV	54.0	-19.1	1.05 V	268	20.3	14.6
7	18075.00	56.0 PK	74.0	-18.0	2.19 V	162	61.3	-5.3
8	18075.00	45.1 AV	54.0	-8.9	2.19 V	162	50.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

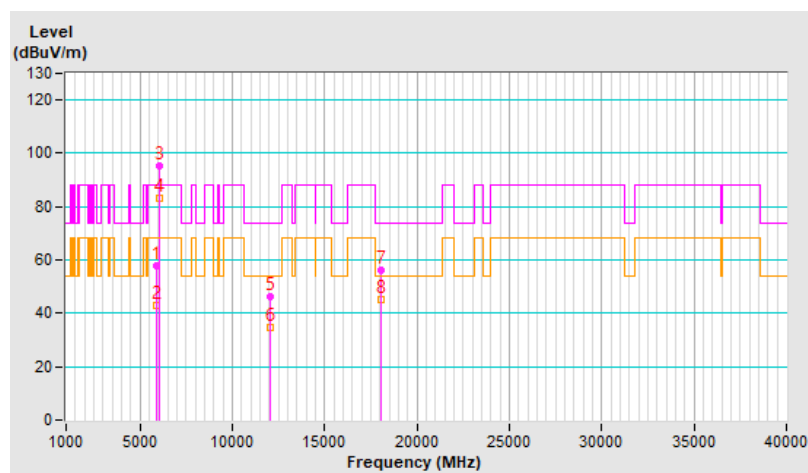


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	99.0 PK			2.02 H	181	92.6	6.4
2	*6345.00	87.8 AV			2.02 H	181	81.4	6.4
3	12690.00	46.8 PK	74.0	-27.2	1.47 H	62	31.9	14.9
4	12690.00	34.7 AV	54.0	-19.3	1.47 H	62	19.8	14.9
5	19035.00	56.1 PK	74.0	-17.9	1.94 H	360	61.0	-4.9
6	19035.00	47.3 AV	54.0	-6.7	1.94 H	360	52.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

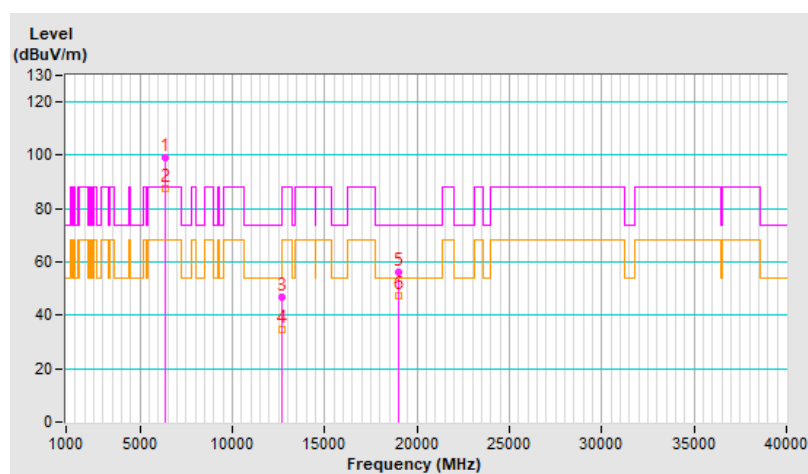


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	95.2 PK			1.07 V	217	88.8	6.4
2	*6345.00	83.4 AV			1.07 V	217	77.0	6.4
3	12690.00	46.2 PK	74.0	-27.8	1.05 V	257	31.3	14.9
4	12690.00	34.8 AV	54.0	-19.2	1.05 V	257	19.9	14.9
5	19035.00	56.0 PK	74.0	-18.0	2.17 V	166	60.9	-4.9
6	19035.00	45.1 AV	54.0	-8.9	2.17 V	166	50.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

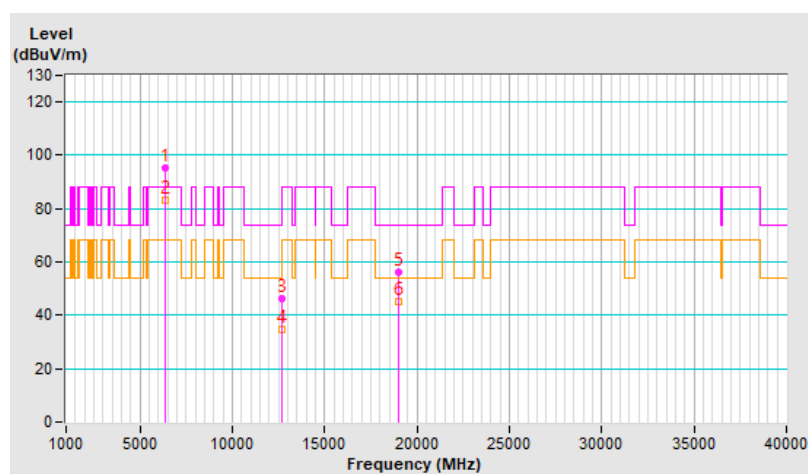


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.2 PK			1.93 H	169	93.4	7.8
2	*6665.00	89.3 AV			1.93 H	169	81.5	7.8
3	13330.00	47.3 PK	74.0	-26.7	1.54 H	68	32.0	15.3
4	13330.00	35.2 AV	54.0	-18.8	1.54 H	68	19.9	15.3
5	19995.00	55.2 PK	74.0	-18.8	1.92 H	360	59.6	-4.4
6	19995.00	46.8 AV	54.0	-7.2	1.92 H	360	51.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

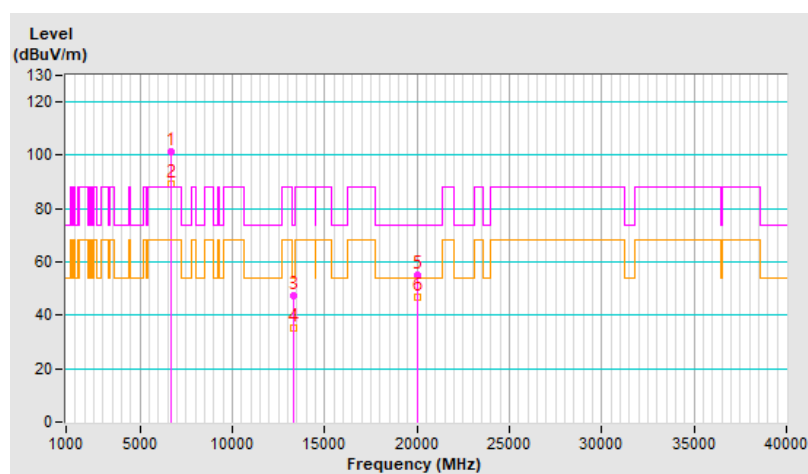


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	90.6 PK			1.00 V	196	82.8	7.8
2	*6665.00	78.9 AV			1.00 V	196	71.1	7.8
3	13330.00	47.1 PK	74.0	-26.9	1.00 V	240	31.8	15.3
4	13330.00	35.3 AV	54.0	-18.7	1.00 V	240	20.0	15.3
5	19995.00	55.6 PK	74.0	-18.4	2.25 V	162	60.0	-4.4
6	19995.00	44.7 AV	54.0	-9.3	2.25 V	162	49.1	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

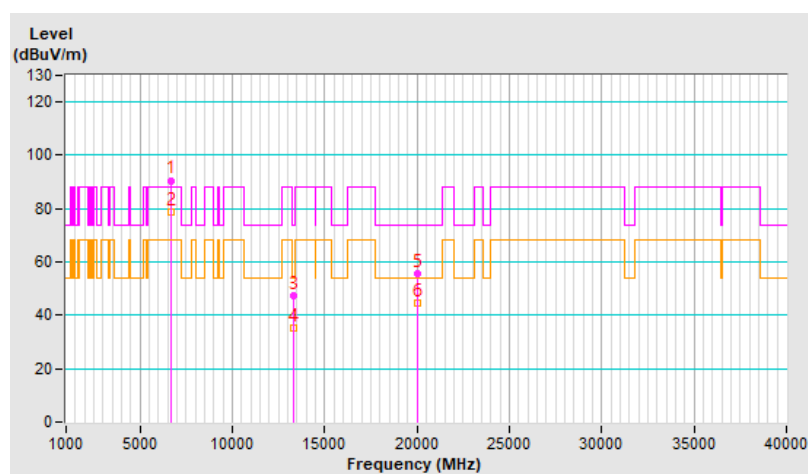


Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11a Channel 1

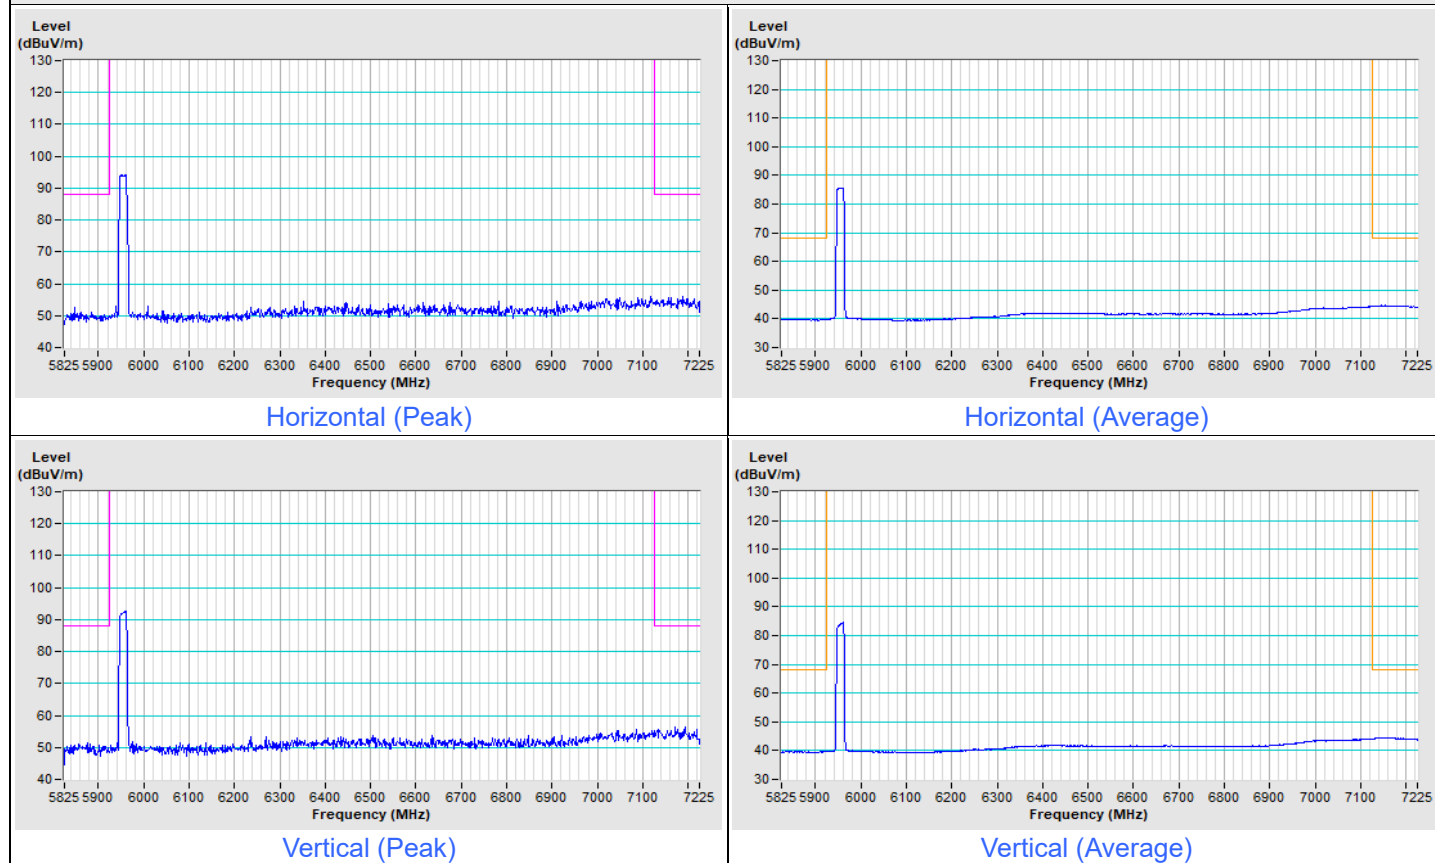


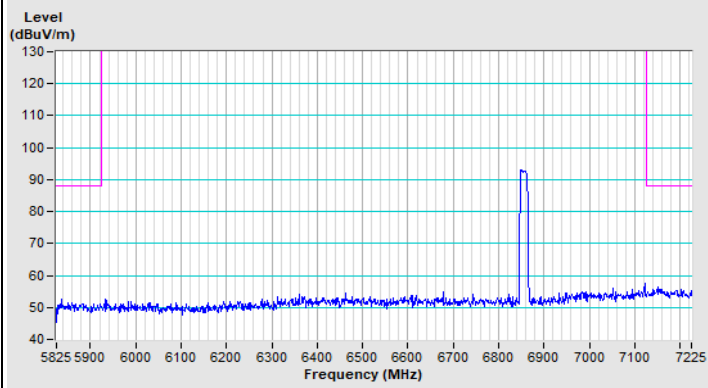802.11a Channel 181


Horizontal (Peak)

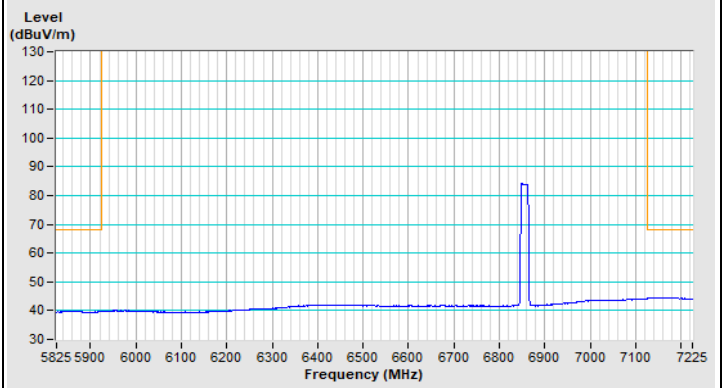

Horizontal (Average)

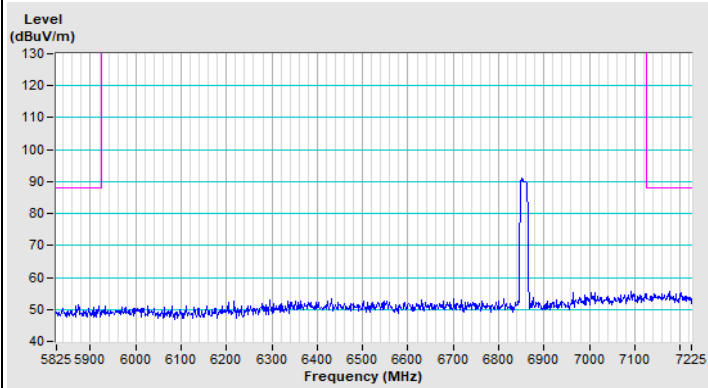


Vertical (Peak)

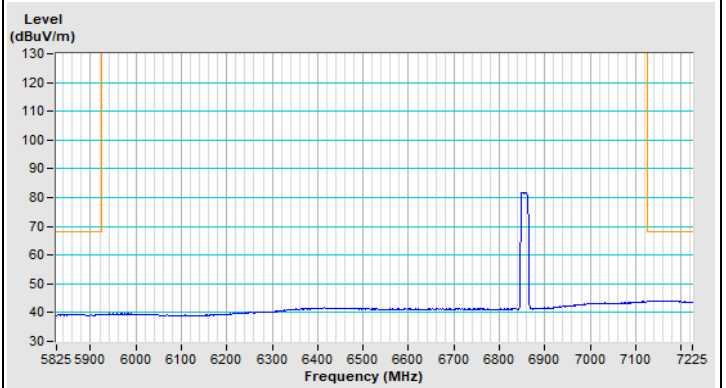


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) Channel 1

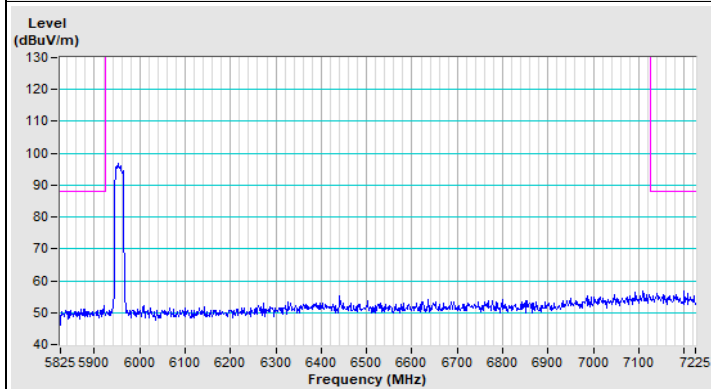


Horizontal (Peak)

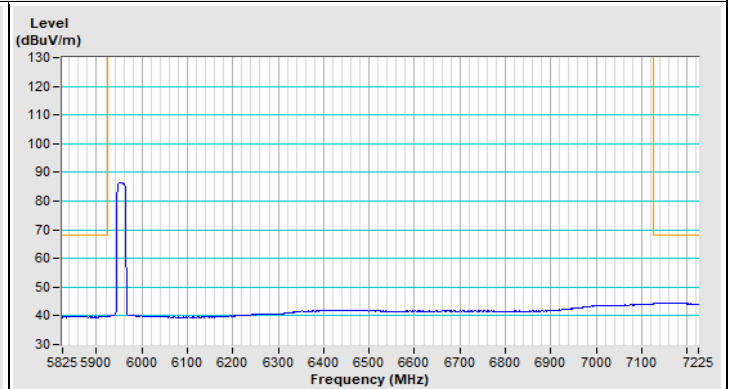


Horizontal (Average)

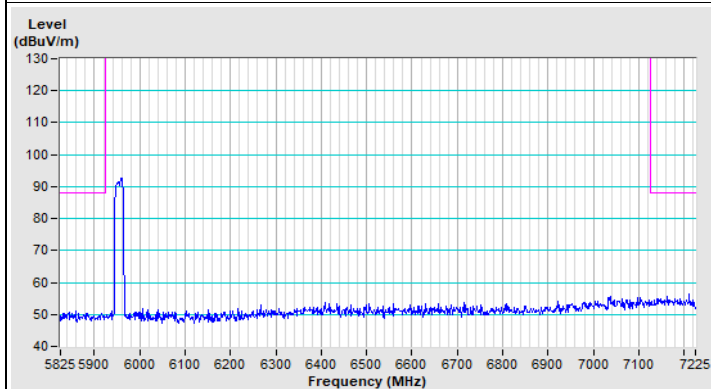


Vertical (Peak)

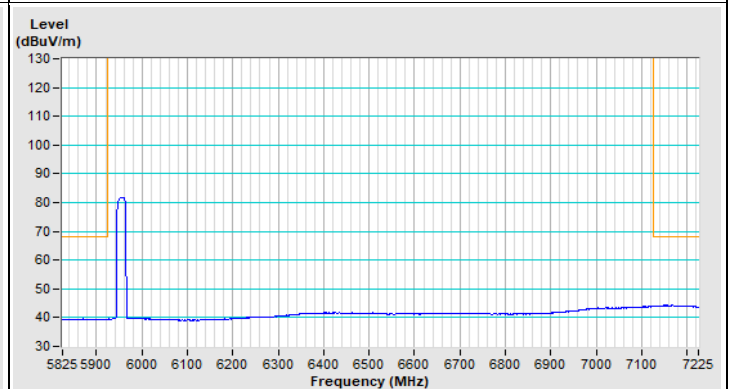


Vertical (Average)

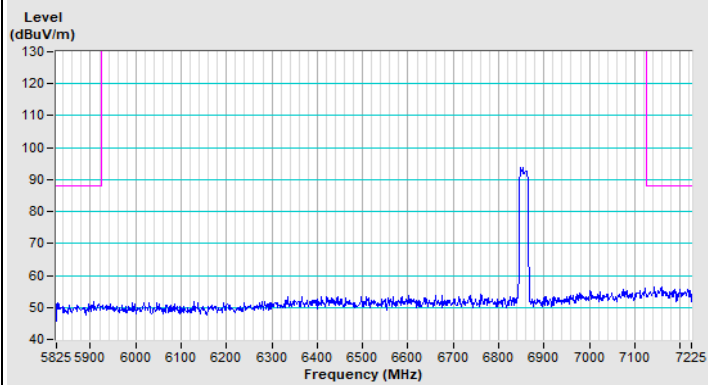802.11be (EHT20) Channel 181


Horizontal (Peak)

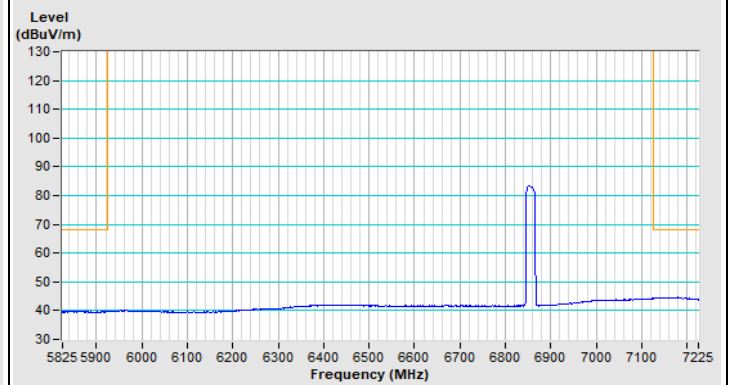

Horizontal (Average)

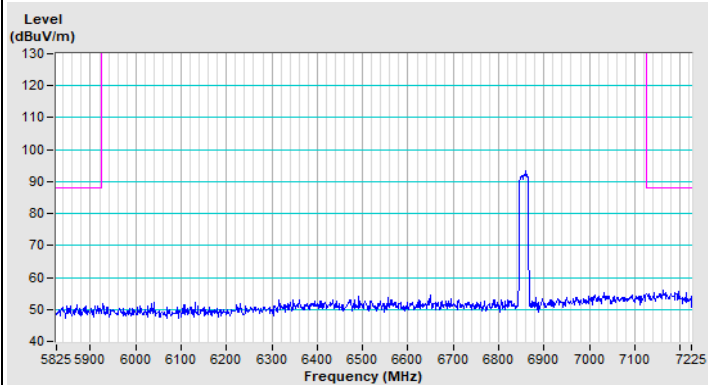


Vertical (Peak)

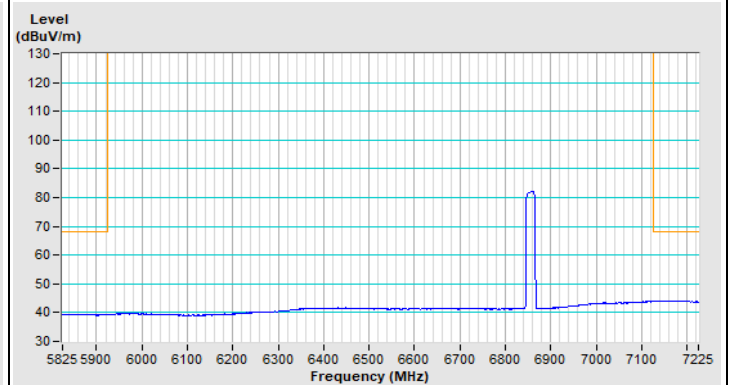


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 3

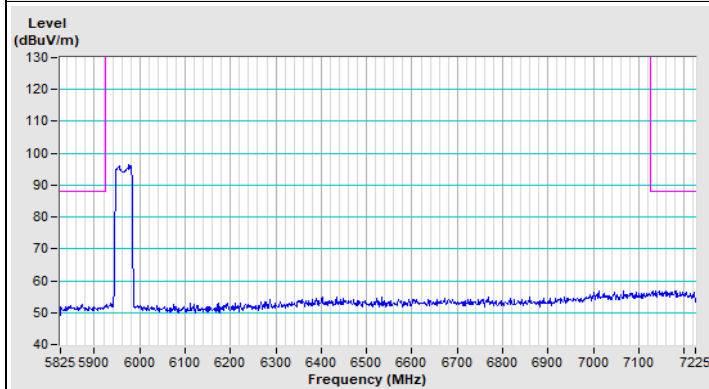


Horizontal (Peak)

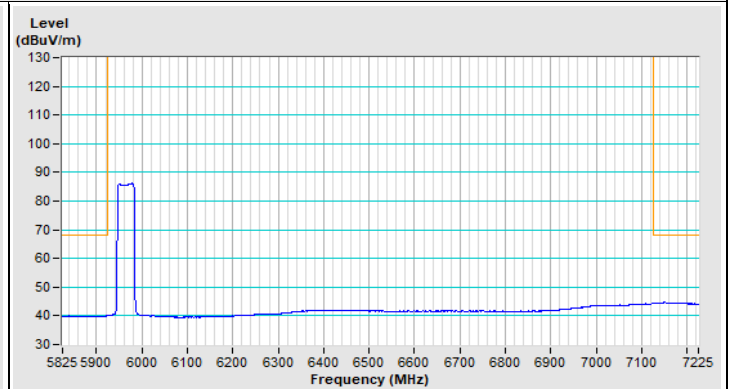


Horizontal (Average)

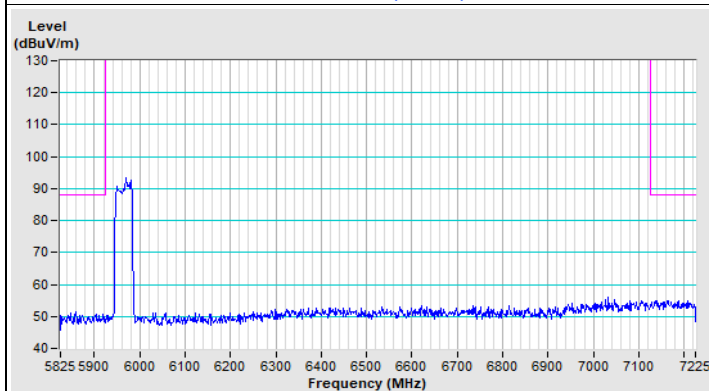


Vertical (Peak)

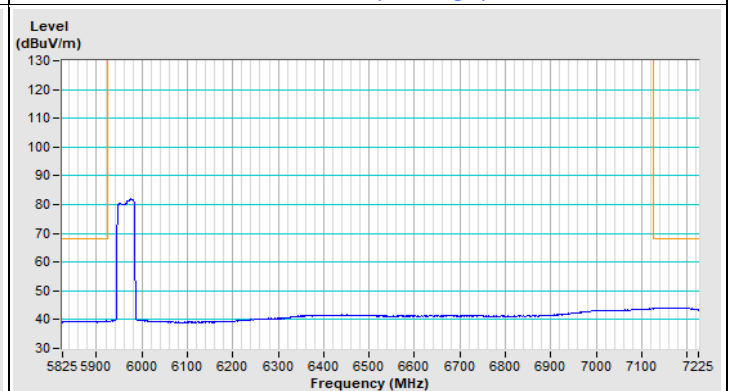


Vertical (Average)

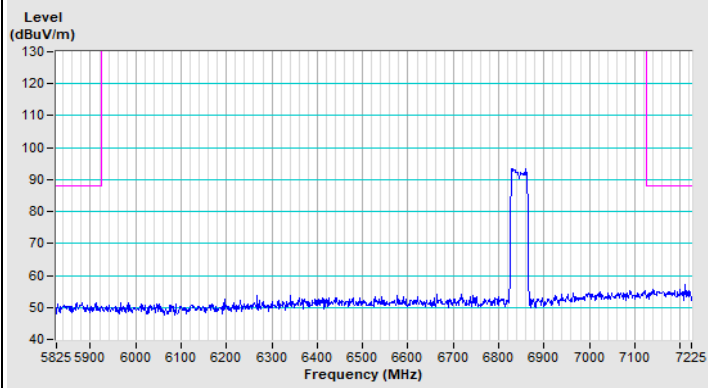802.11be (EHT40) Channel 179


Horizontal (Peak)

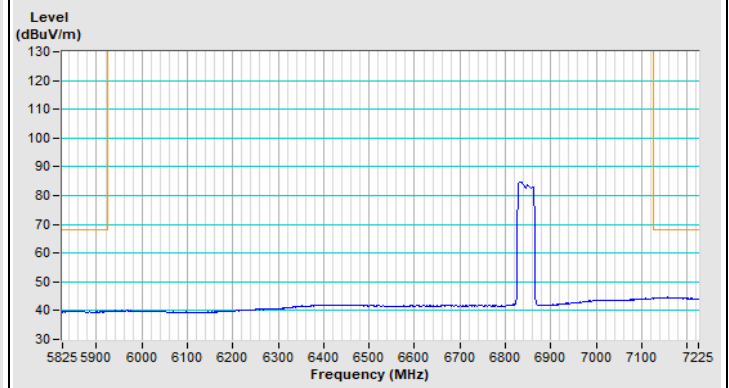

Horizontal (Average)

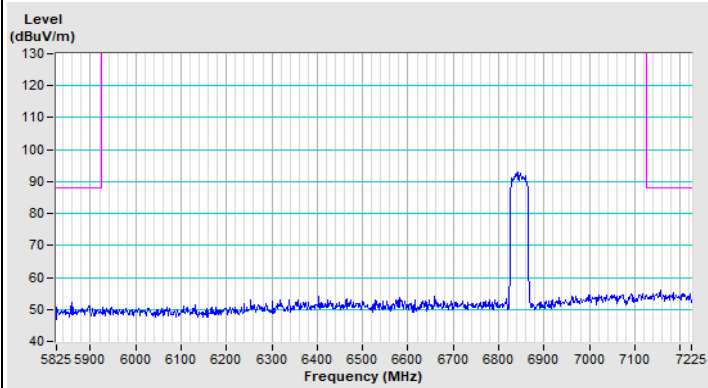


Vertical (Peak)

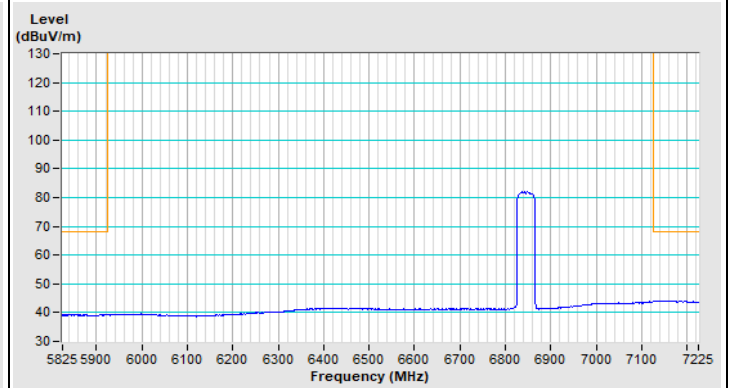


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 7

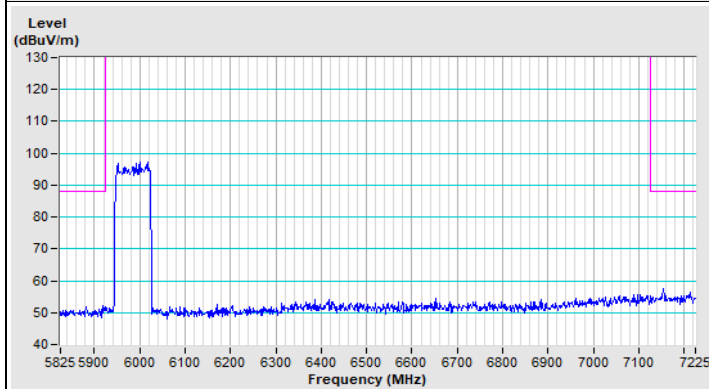


Horizontal (Peak)

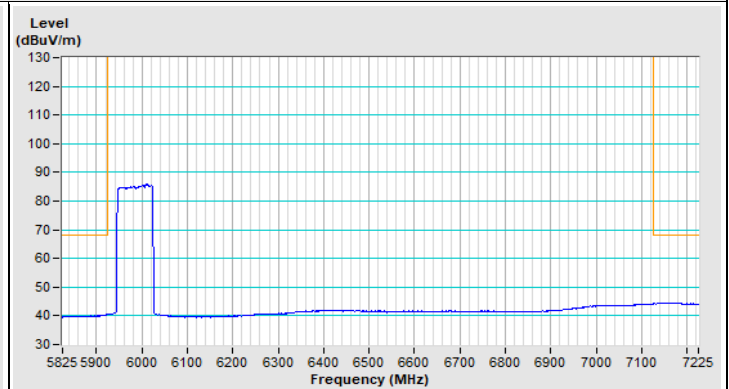

Horizontal (Average)

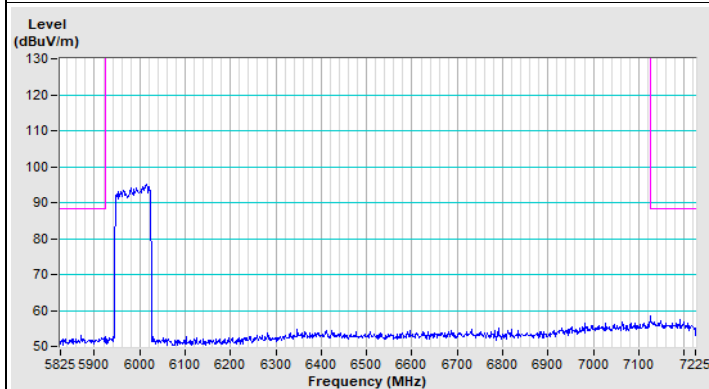


Vertical (Peak)

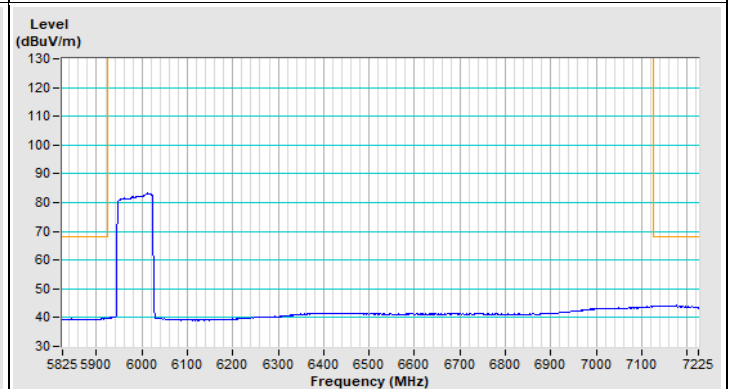


Vertical (Average)


802.11be (EHT80) Channel 167

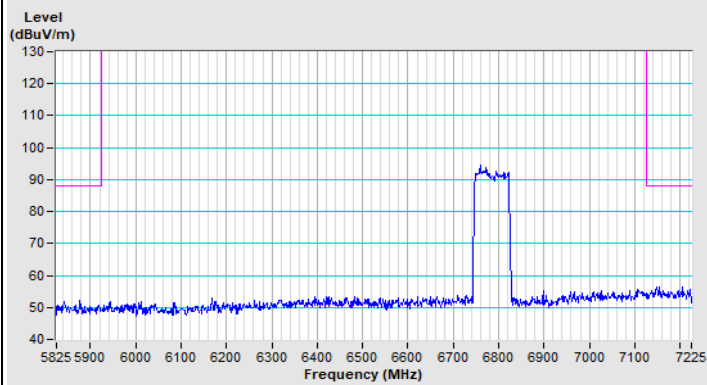


Horizontal (Peak)

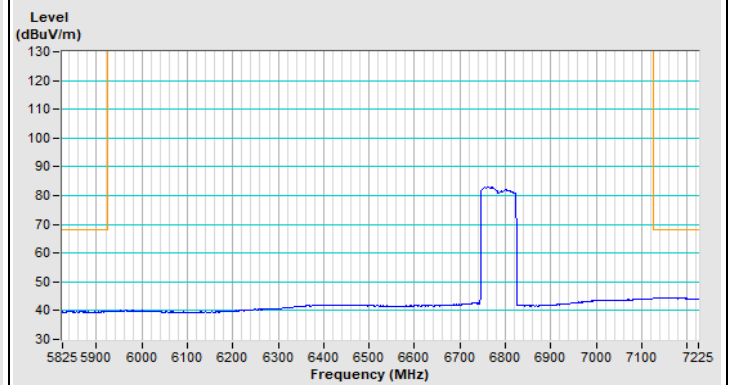

Horizontal (Average)

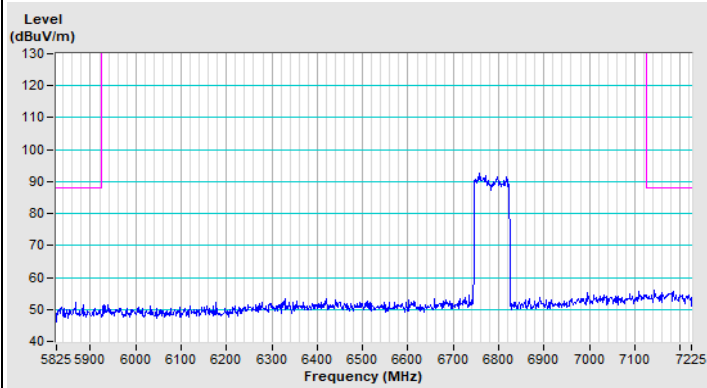


Vertical (Peak)

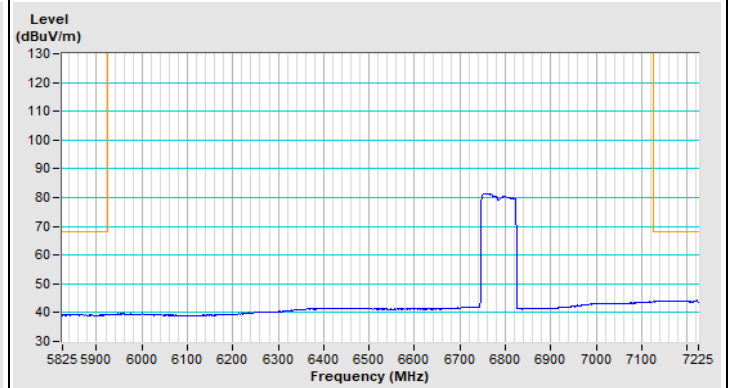


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 15

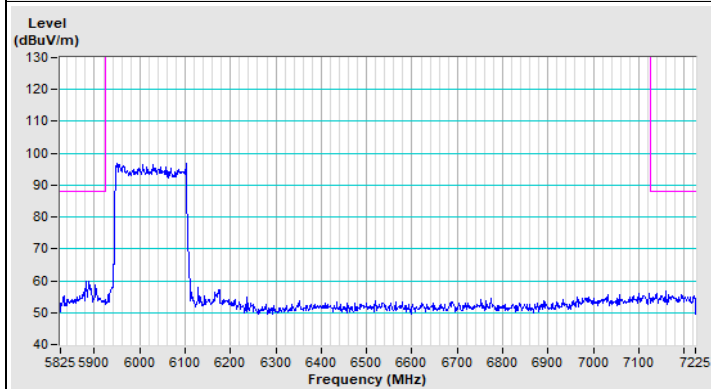


Horizontal (Peak)

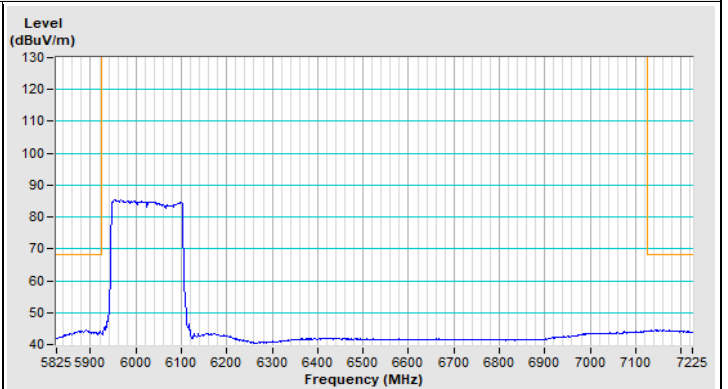

Horizontal (Average)

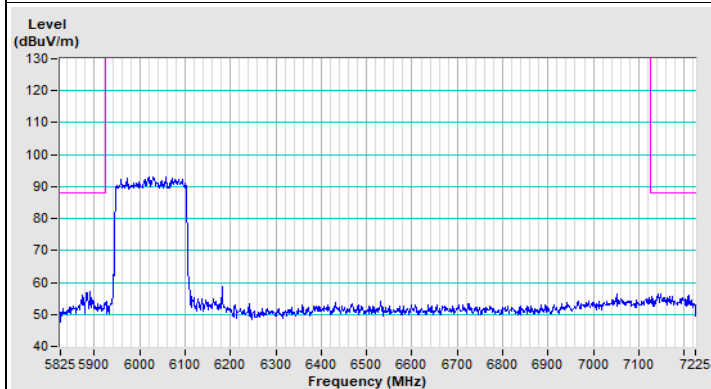


Vertical (Peak)

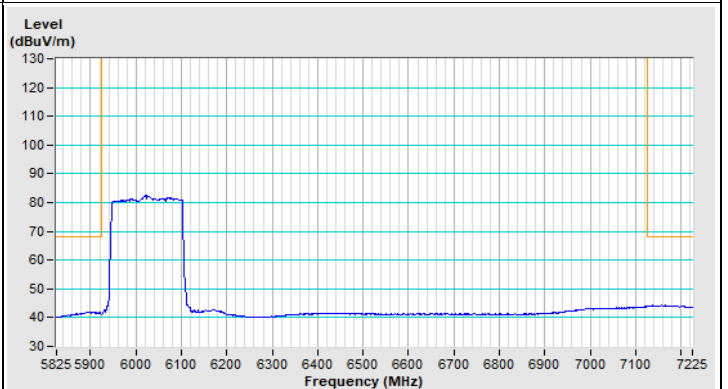


Vertical (Average)


802.11be (EHT160) Channel 143

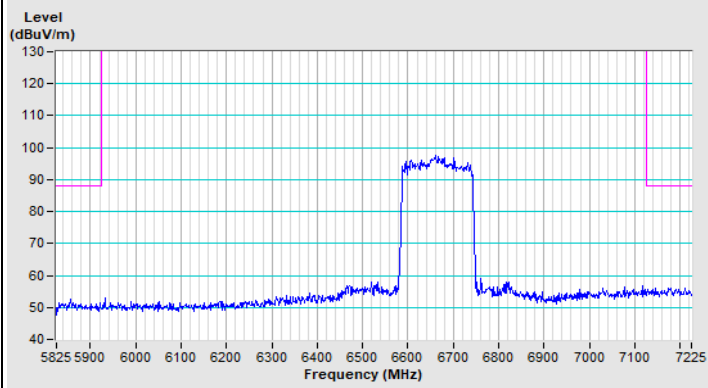


Horizontal (Peak)

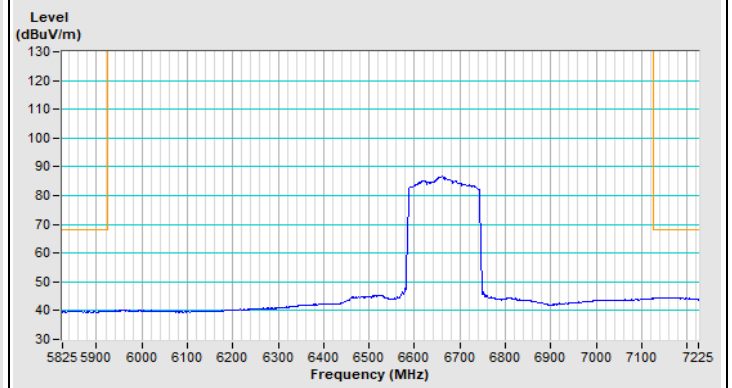

Horizontal (Average)

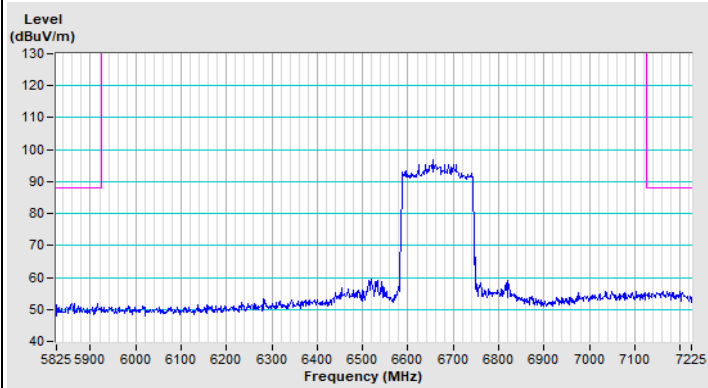


Vertical (Peak)

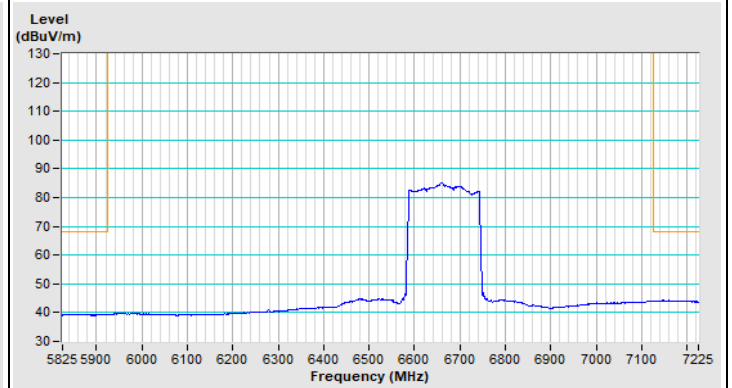


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

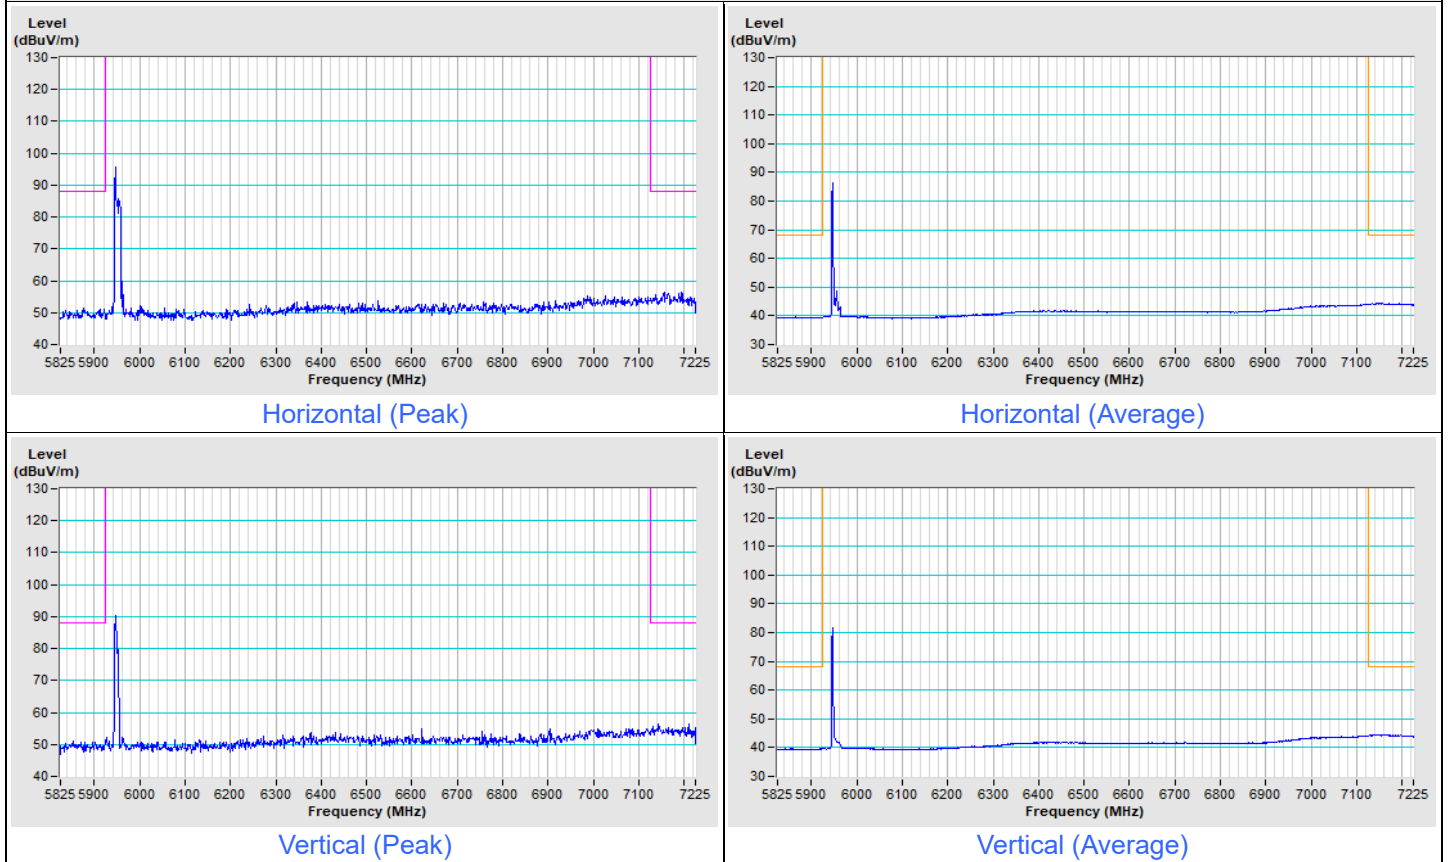


802.11be (EHT20) 26-tone RU Channel 181

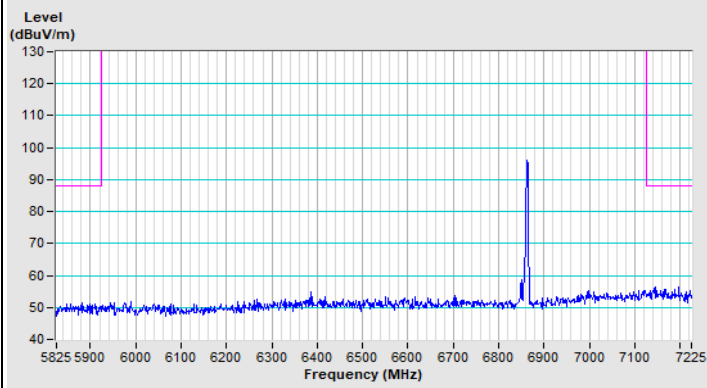


Horizontal (Peak)

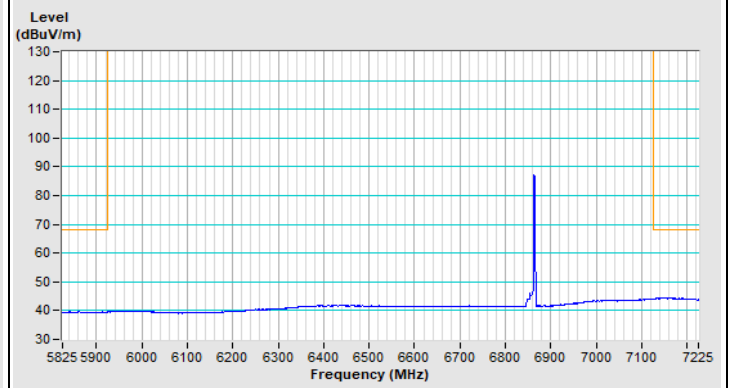

Horizontal (Average)

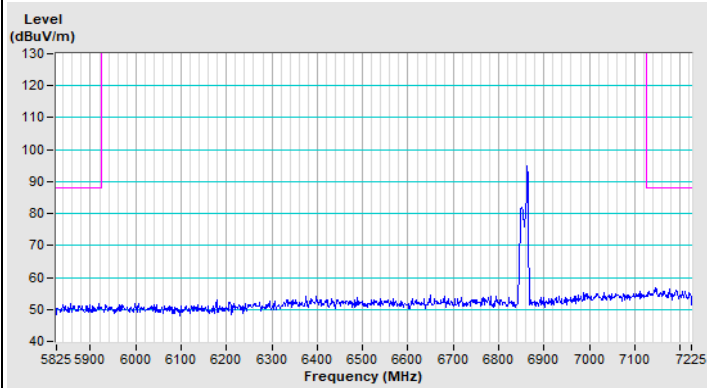


Vertical (Peak)

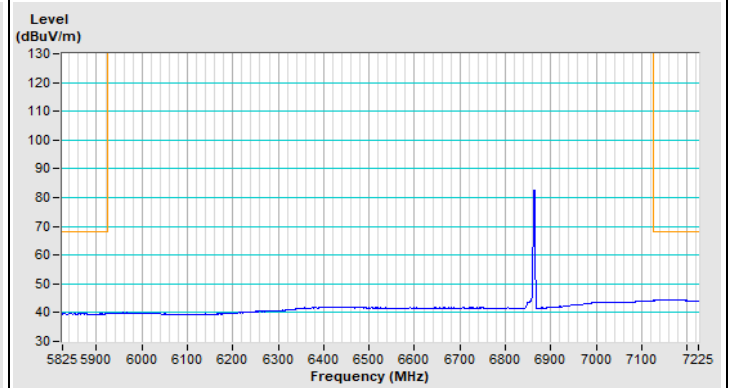


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

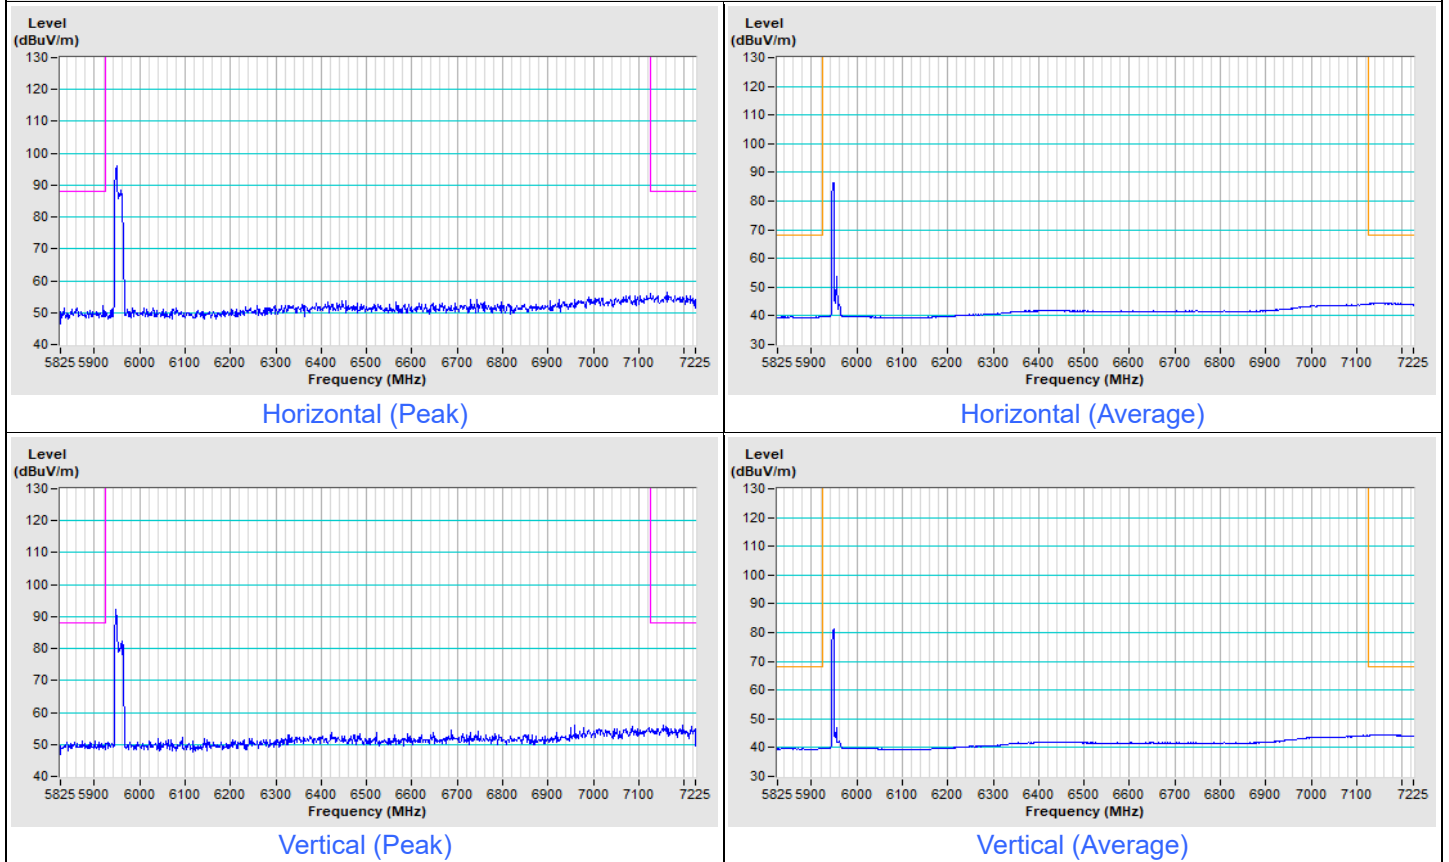


802.11be (EHT20) 52-tone RU Channel 181

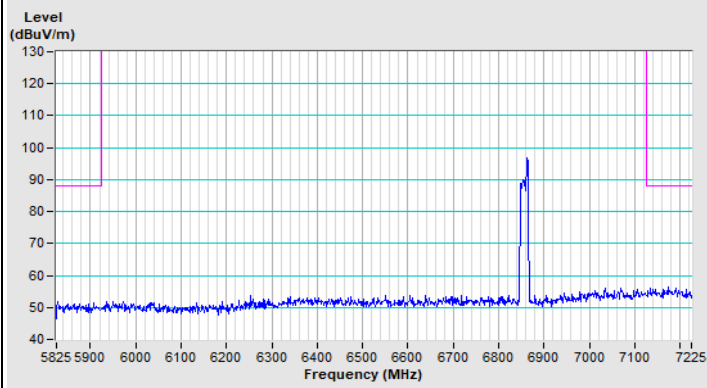


Horizontal (Peak)

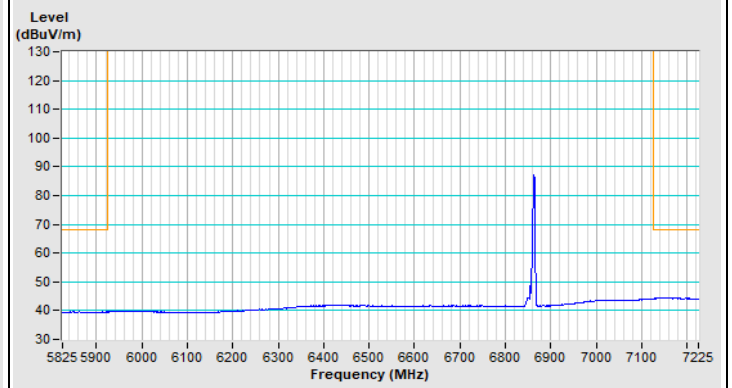

Horizontal (Average)

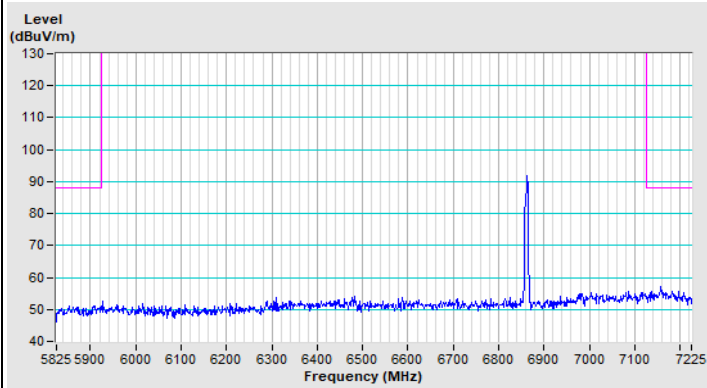


Vertical (Peak)

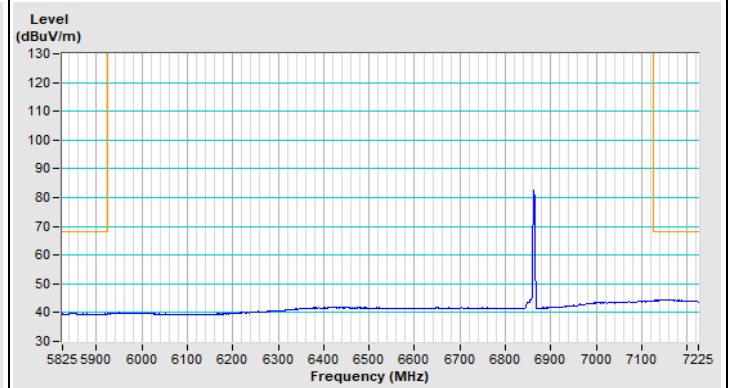


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

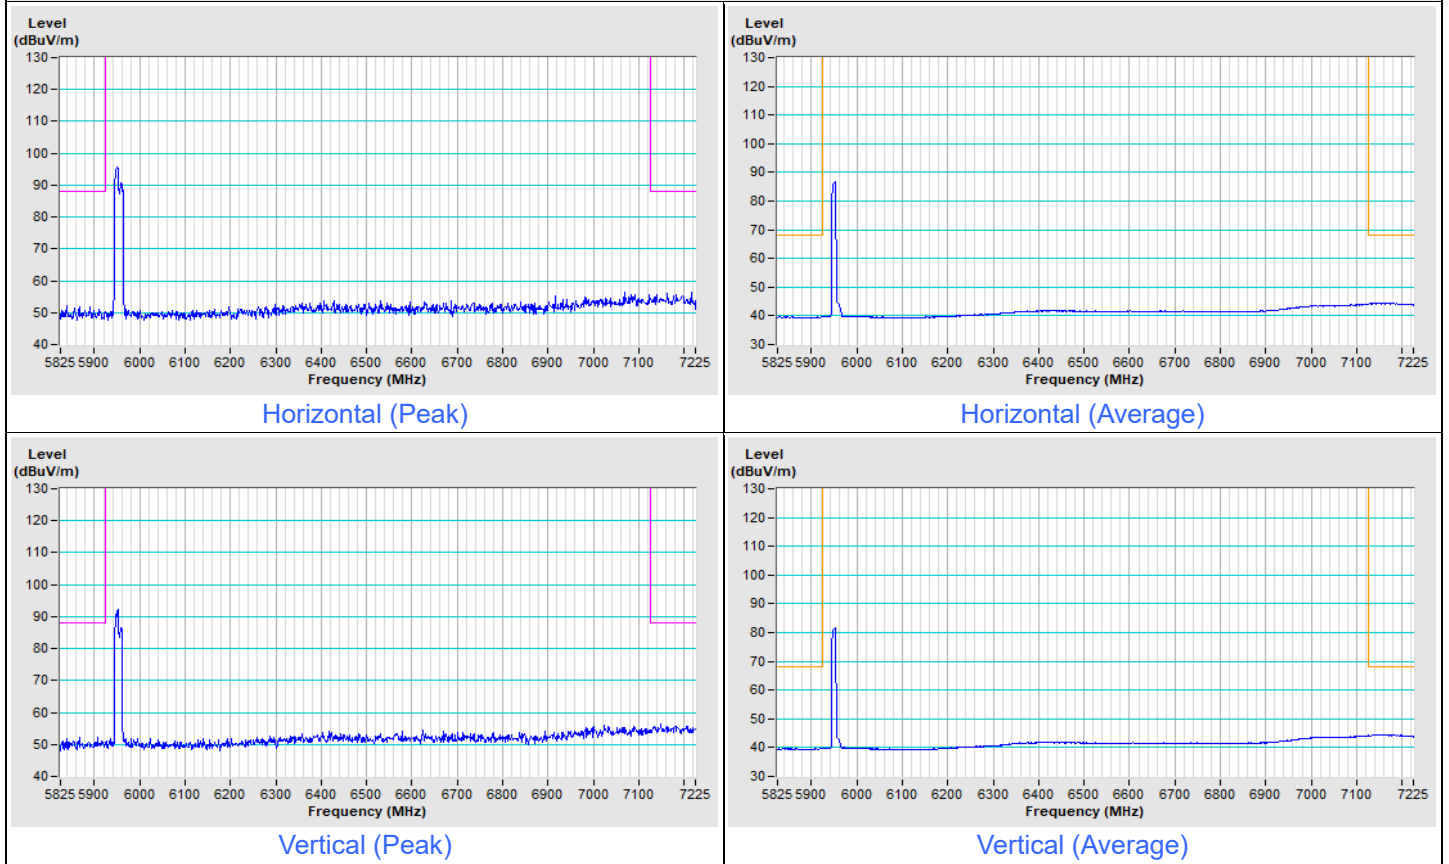


802.11be (EHT20) 106-tone RU Channel 181

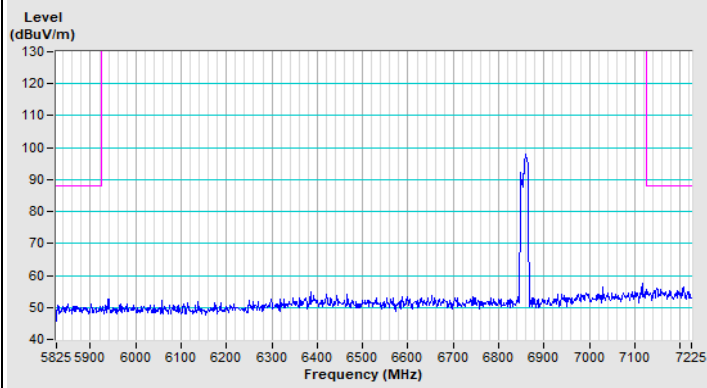


Horizontal (Peak)

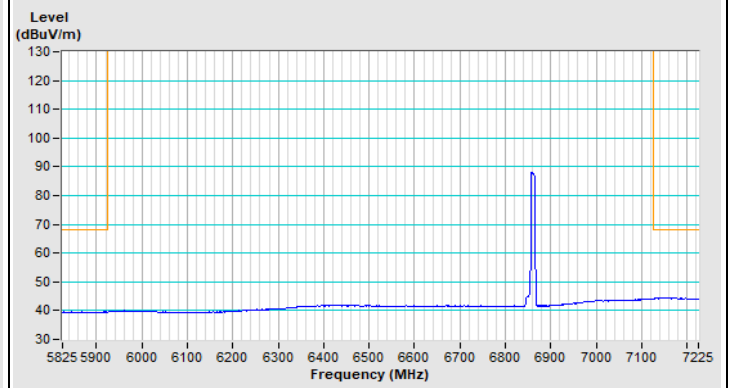

Horizontal (Average)

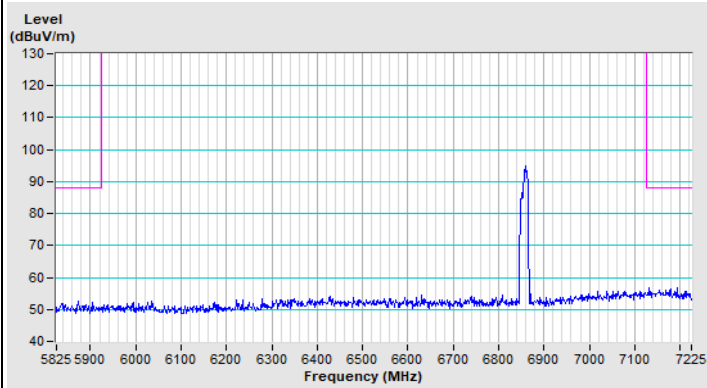


Vertical (Peak)

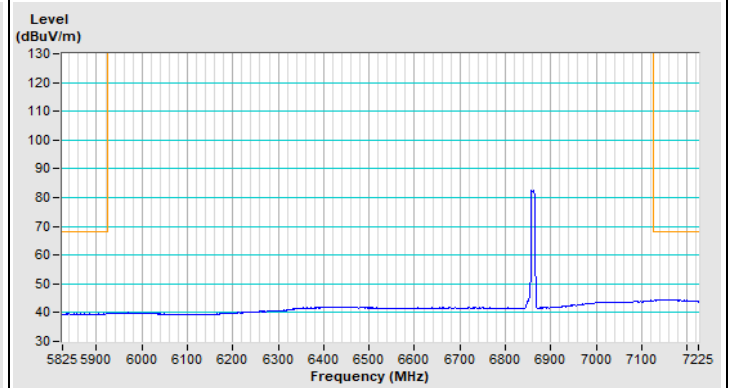


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

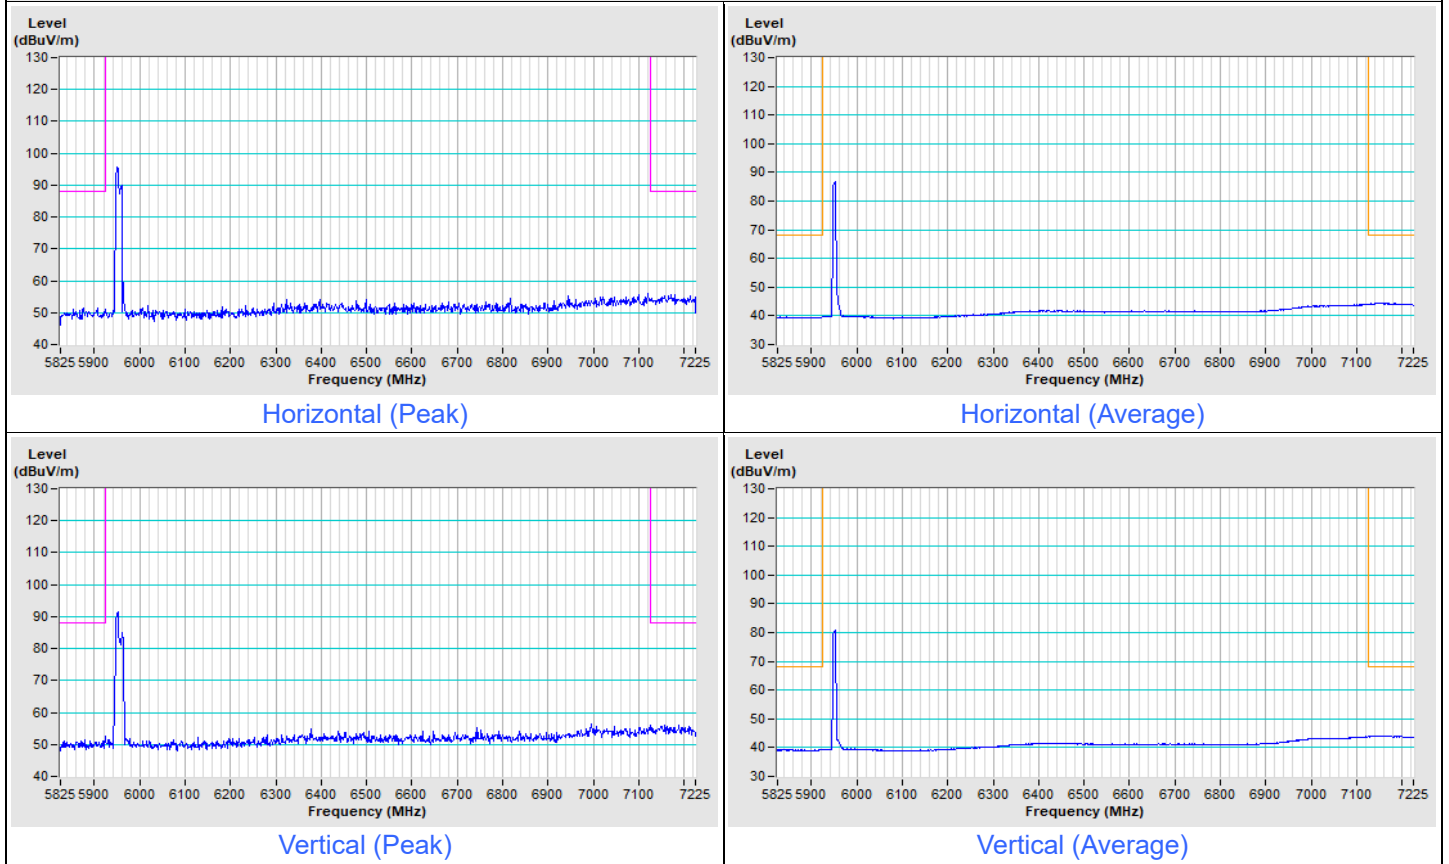


802.11be (EHT20) 52+26-tone MRU Channel 181

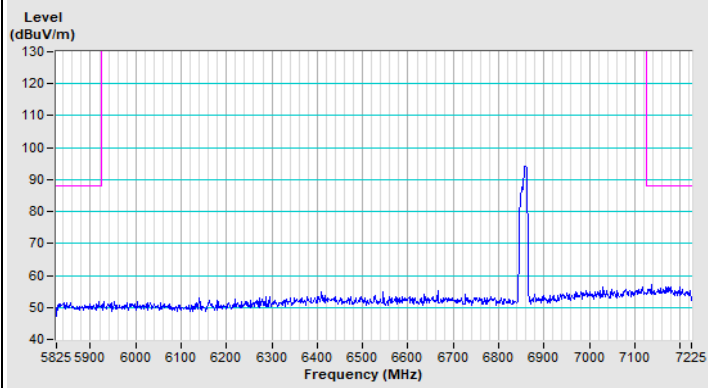


Horizontal (Peak)

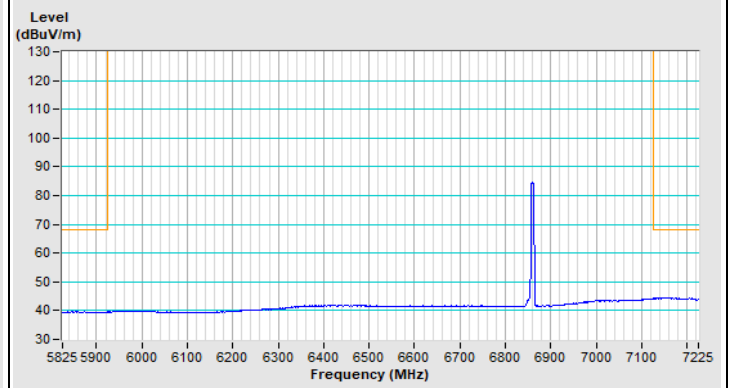

Horizontal (Average)

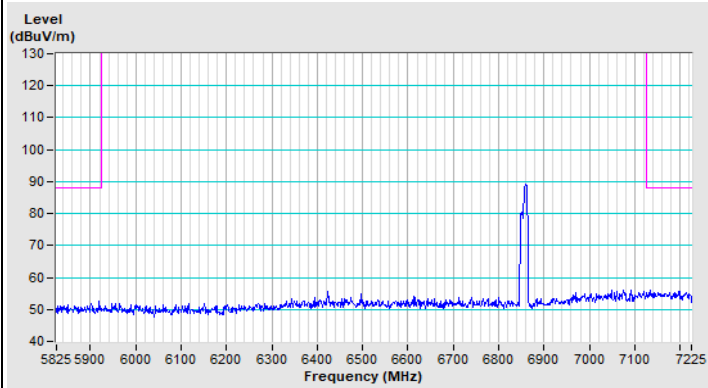


Vertical (Peak)

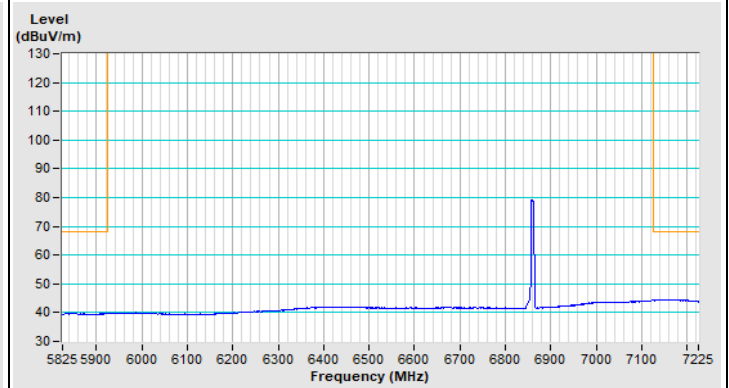


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

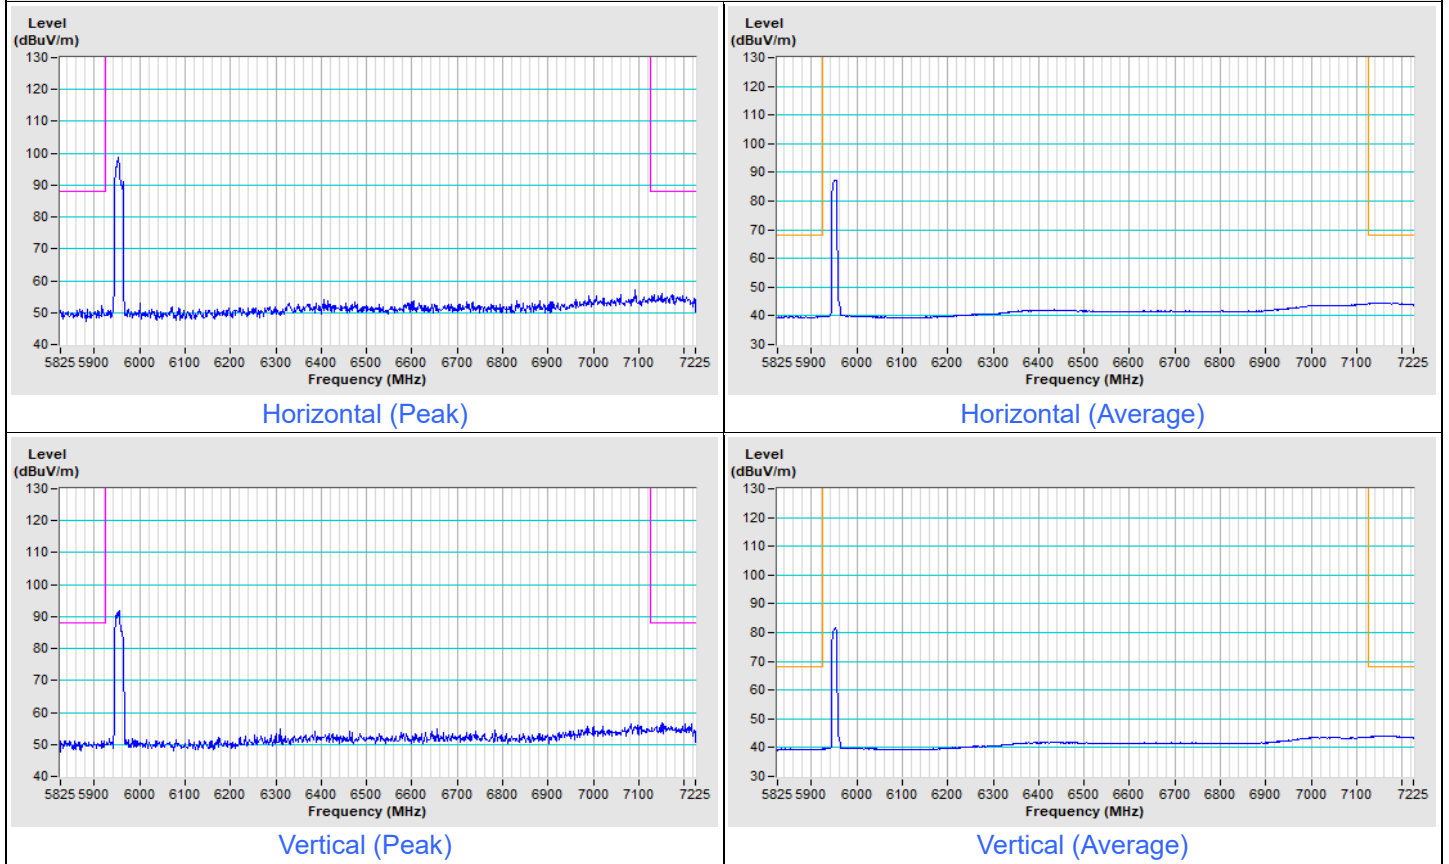


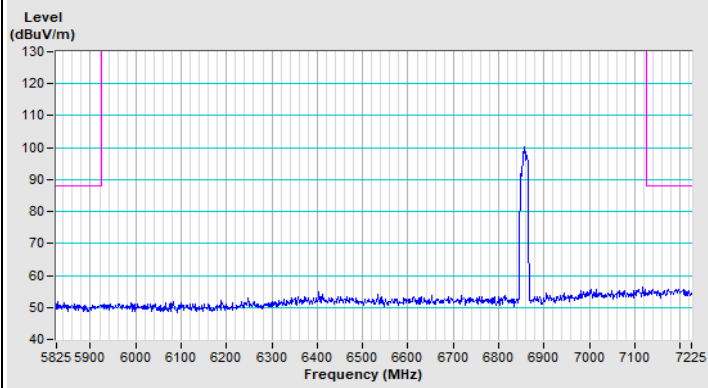802.11be (EHT20) 106+26-tone MRU Channel 181


Horizontal (Peak)

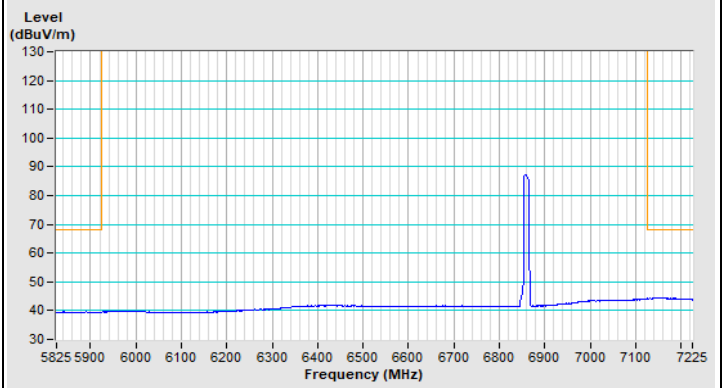

Horizontal (Average)

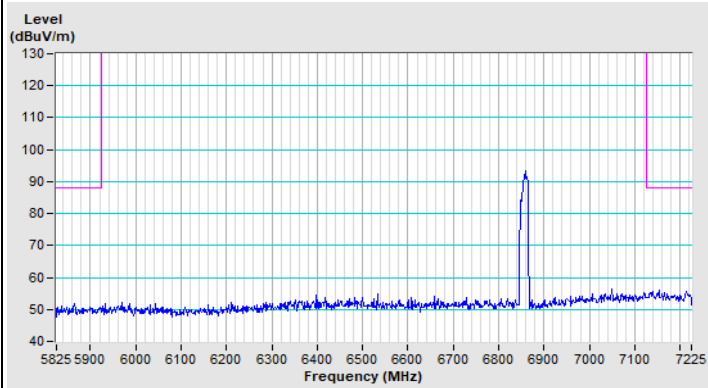


Vertical (Peak)

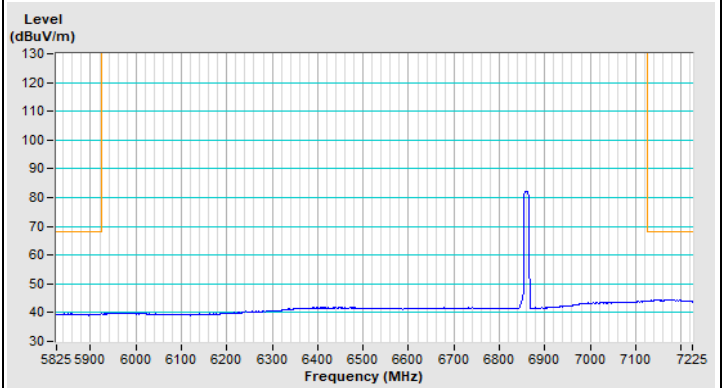


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

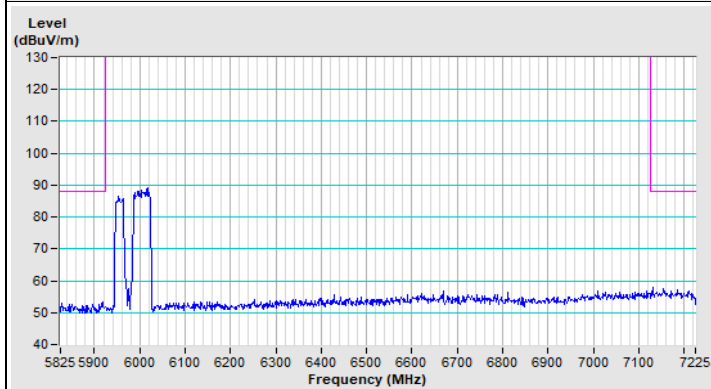


Horizontal (Peak)

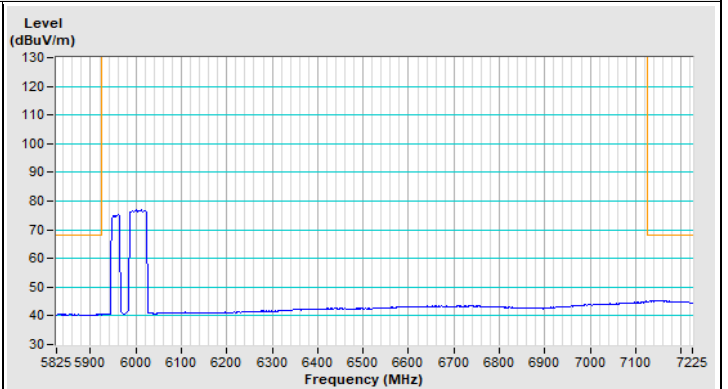

Horizontal (Average)

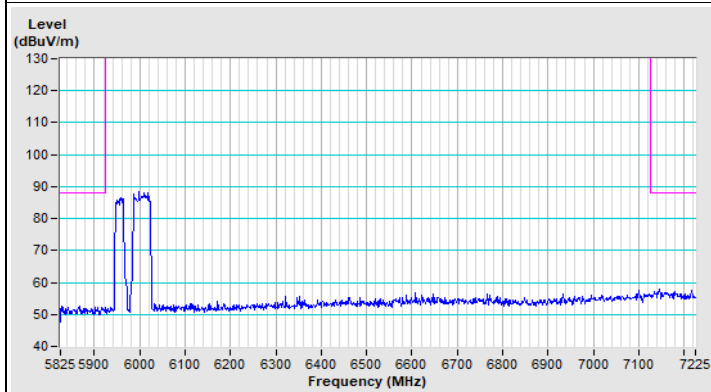


Vertical (Peak)

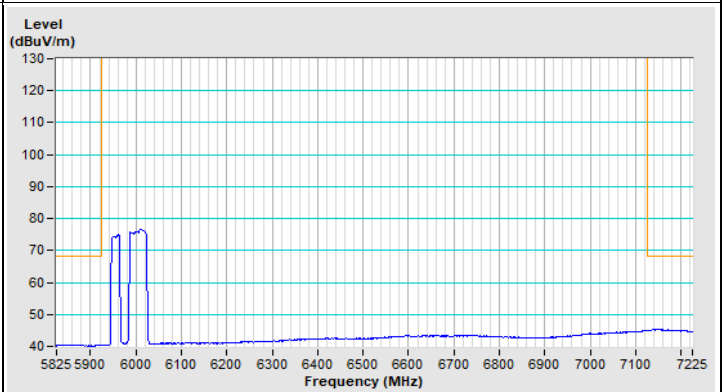


Vertical (Average)


802.11be (EHT80) 484+242-tone MRU Channel 167

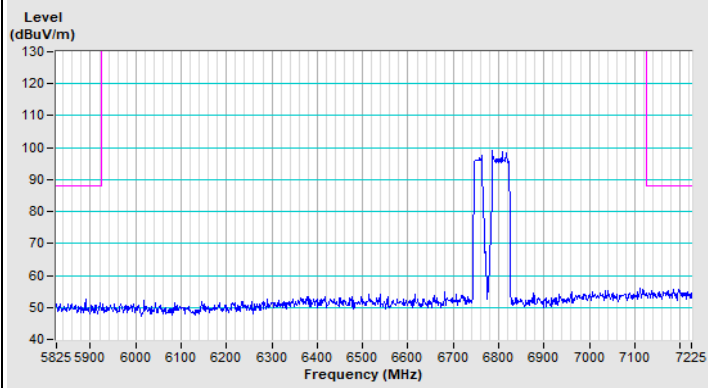


Horizontal (Peak)

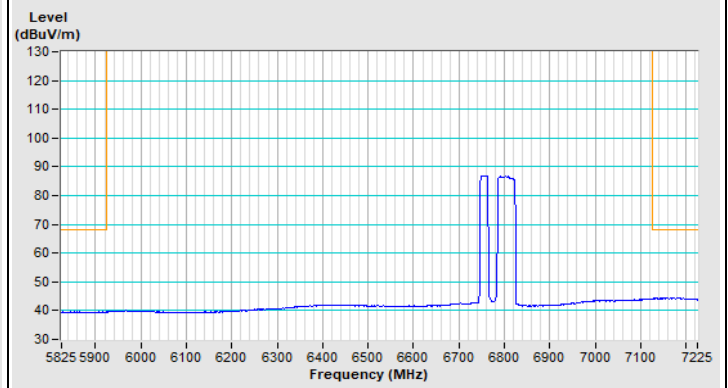

Horizontal (Average)

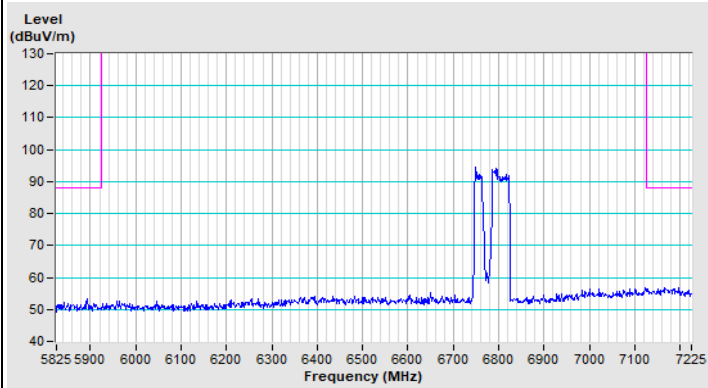


Vertical (Peak)

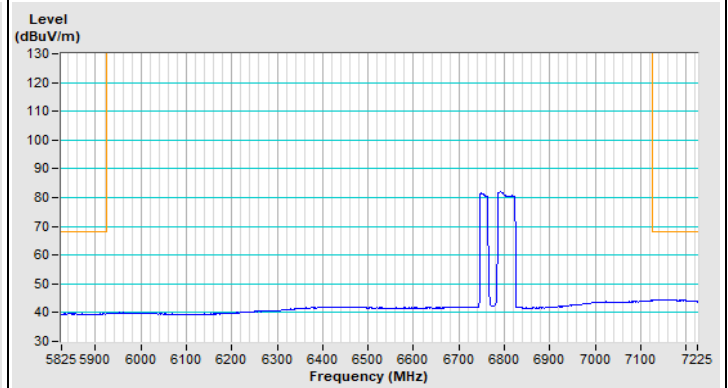


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

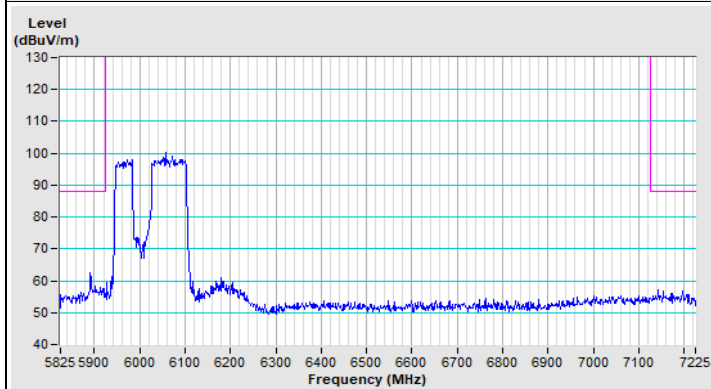


Horizontal (Peak)

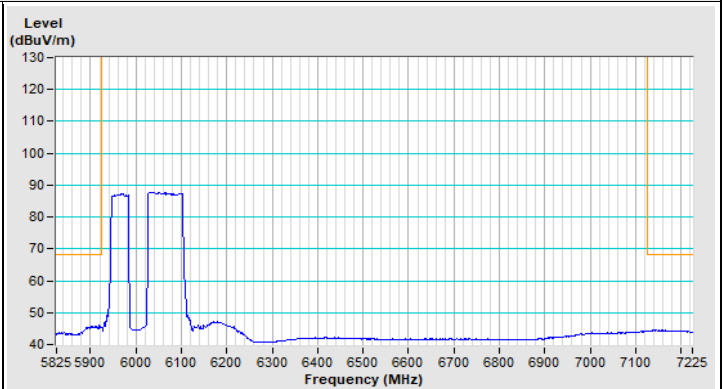

Horizontal (Average)

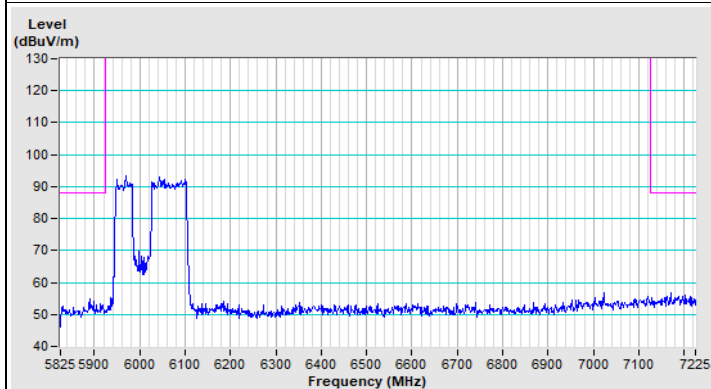


Vertical (Peak)

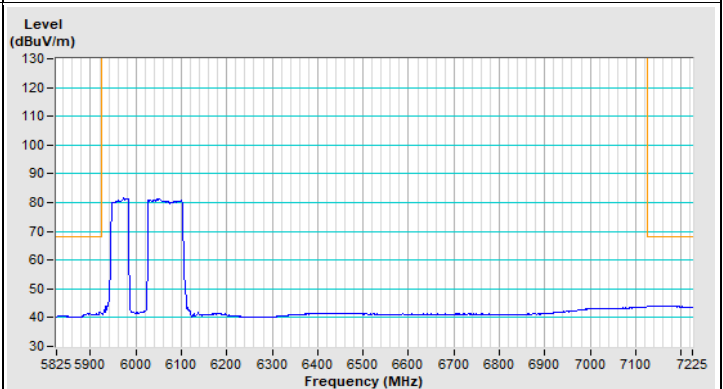


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 143

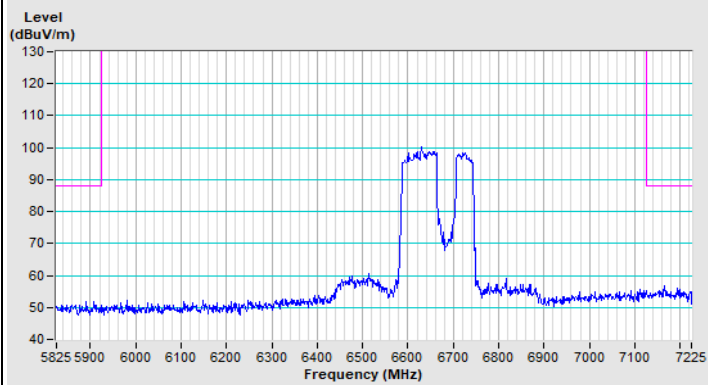


Horizontal (Peak)

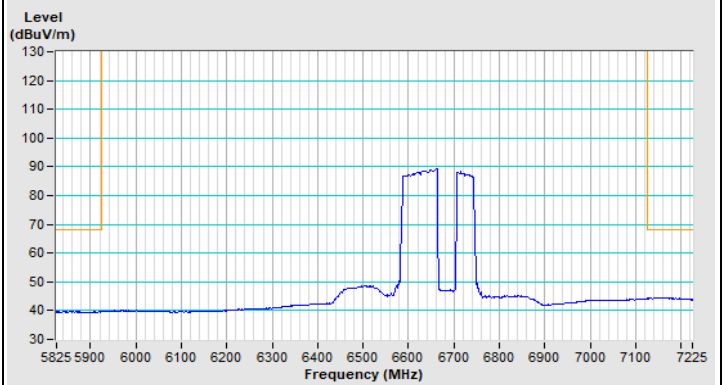

Horizontal (Average)

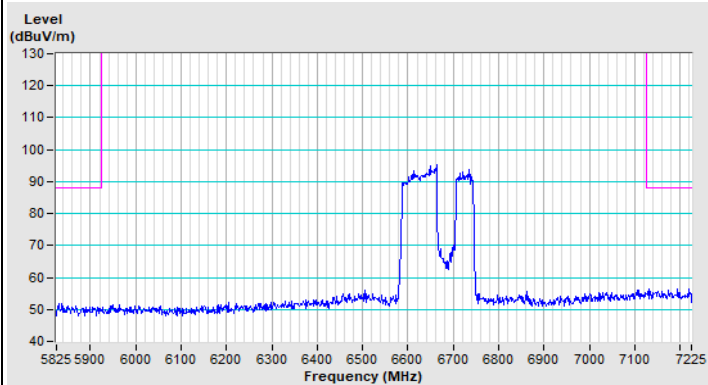


Vertical (Peak)

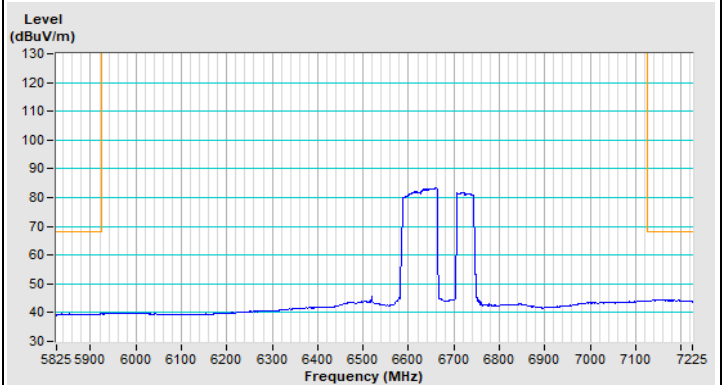


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

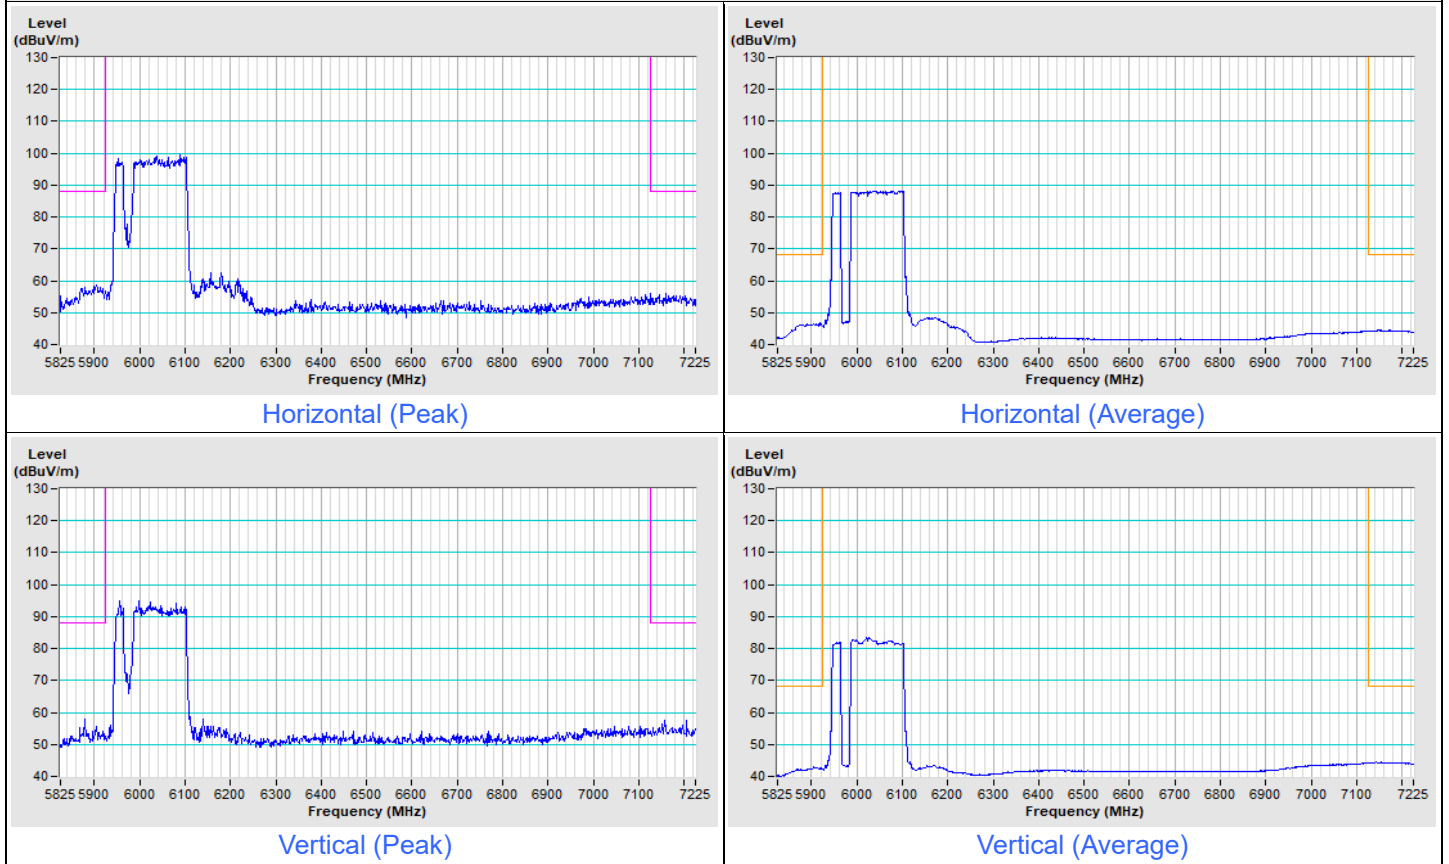


802.11be (EHT160) 996+484+242-tone MRU Channel 143

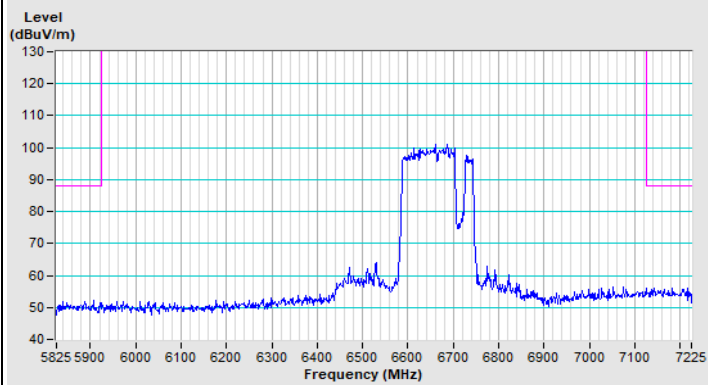


Horizontal (Peak)

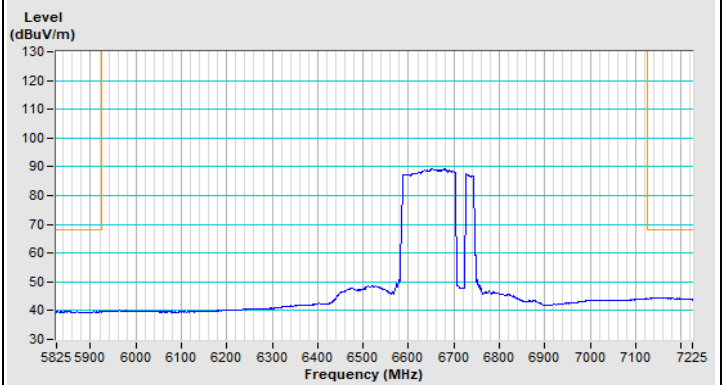

Horizontal (Average)

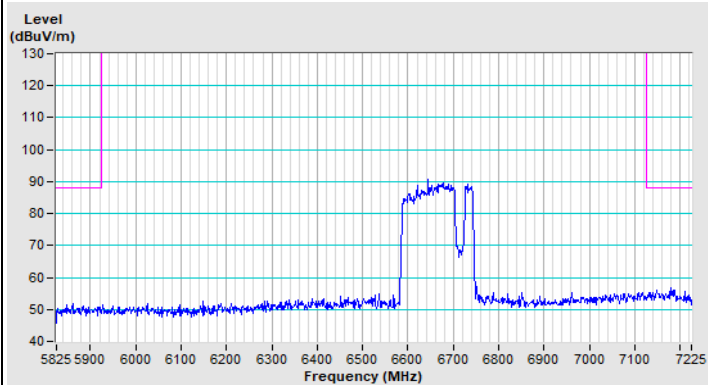

Vertical (Peak)

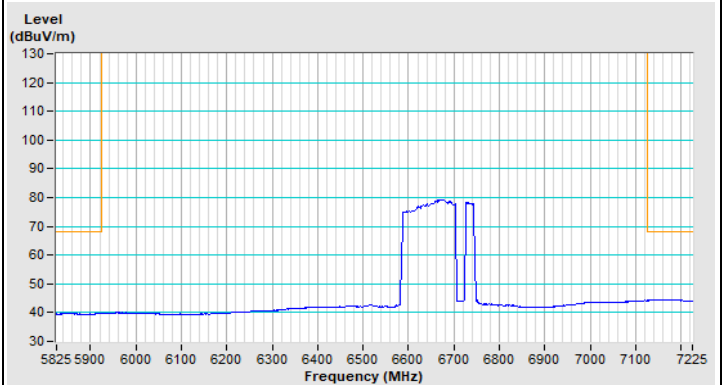

Vertical (Average)


Mode A_2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.5 PK	88.2	-34.7	1.80 H	1	47.9	5.6
2	#5925.00	41.9 AV	68.2	-26.3	1.80 H	1	36.3	5.6
3	*5955.00	107.6 PK			1.80 H	1	102.1	5.5
4	*5955.00	98.9 AV			1.80 H	1	93.4	5.5
5	11910.00	46.1 PK	74.0	-27.9	1.75 H	141	31.5	14.6
6	11910.00	33.4 AV	54.0	-20.6	1.75 H	141	18.8	14.6
7	17865.00	58.2 PK	74.0	-15.8	1.80 H	13	32.3	25.9
8	17865.00	45.2 AV	54.0	-8.8	1.80 H	13	19.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

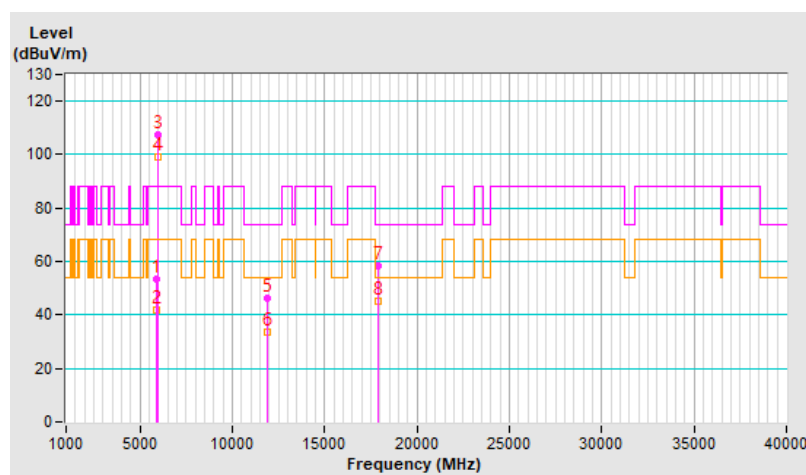


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.7 PK	88.2	-35.5	1.06 V	225	47.1	5.6
2	#5925.00	40.8 AV	68.2	-27.4	1.06 V	225	35.2	5.6
3	*5955.00	100.4 PK			1.06 V	225	94.9	5.5
4	*5955.00	92.0 AV			1.06 V	225	86.5	5.5
5	11910.00	45.7 PK	74.0	-28.3	1.63 V	89	31.1	14.6
6	11910.00	33.7 AV	54.0	-20.3	1.63 V	89	19.1	14.6
7	17865.00	59.2 PK	74.0	-14.8	1.68 V	22	33.3	25.9
8	17865.00	46.1 AV	54.0	-7.9	1.68 V	22	20.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

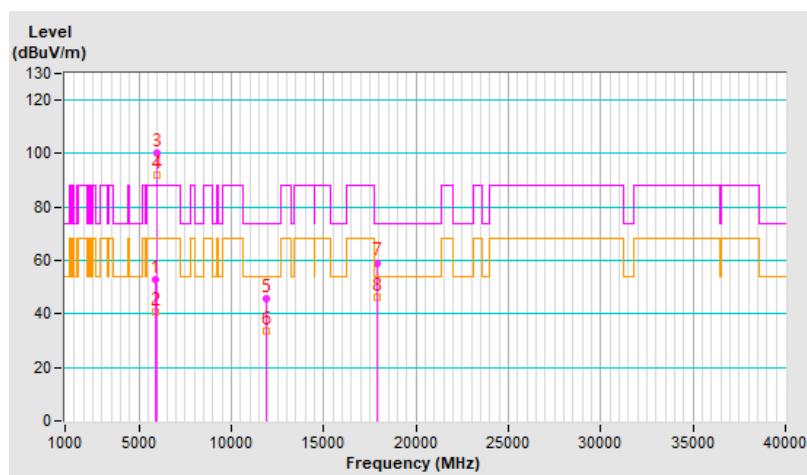


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.7 PK			1.73 H	360	102.9	5.8
2	*6195.00	99.5 AV			1.73 H	360	93.7	5.8
3	12390.00	46.2 PK	74.0	-27.8	1.80 H	118	31.5	14.7
4	12390.00	33.3 AV	54.0	-20.7	1.80 H	118	18.6	14.7
5	18585.00	57.9 PK	74.0	-16.1	1.75 H	0	63.4	-5.5
6	18585.00	45.1 AV	54.0	-8.9	1.75 H	0	50.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

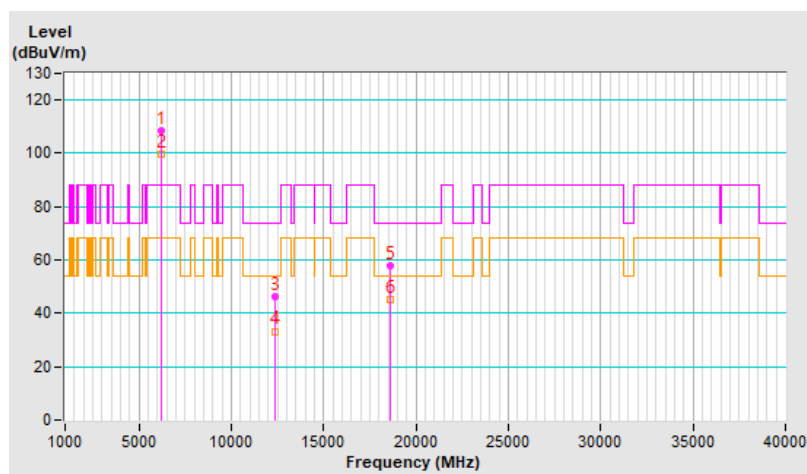


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	102.7 PK			1.78 V	227	96.9	5.8
2	*6195.00	93.5 AV			1.78 V	227	87.7	5.8
3	12390.00	45.0 PK	74.0	-29.0	1.64 V	108	30.3	14.7
4	12390.00	33.3 AV	54.0	-20.7	1.64 V	108	18.6	14.7
5	18585.00	59.1 PK	74.0	-14.9	1.75 V	37	64.6	-5.5
6	18585.00	45.9 AV	54.0	-8.1	1.75 V	37	51.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

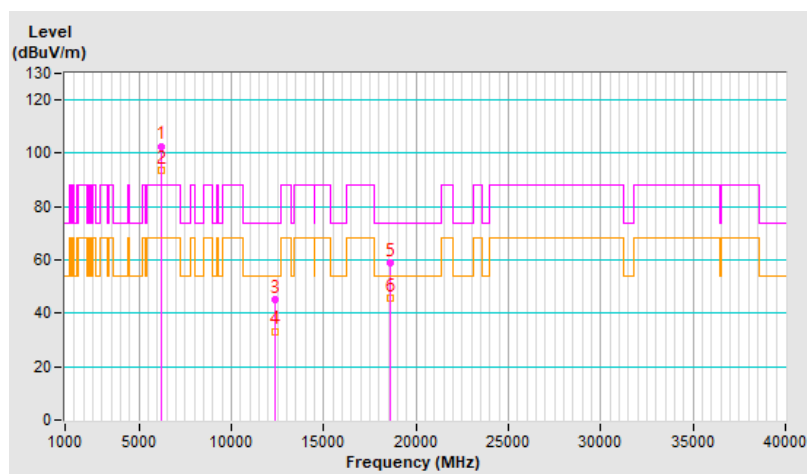


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.0 PK			1.70 H	2	101.2	6.8
2	*6415.00	98.4 AV			1.70 H	2	91.6	6.8
3	#12830.00	46.6 PK	88.2	-41.6	1.85 H	134	31.5	15.1
4	#12830.00	34.0 AV	68.2	-34.2	1.85 H	134	18.9	15.1
5	19245.00	58.0 PK	74.0	-16.0	1.84 H	10	62.6	-4.6
6	19245.00	44.9 AV	54.0	-9.1	1.84 H	10	49.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

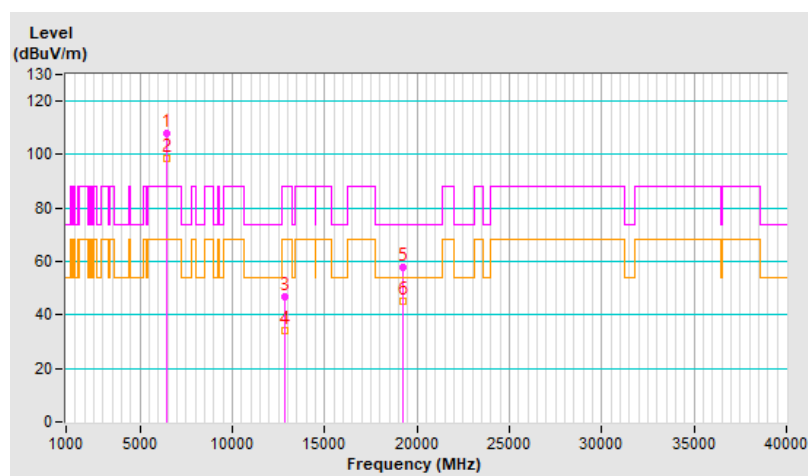


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	102.9 PK			1.27 V	221	96.1	6.8
2	*6415.00	95.1 AV			1.27 V	221	88.3	6.8
3	#12830.00	45.2 PK	88.2	-43.0	1.68 V	109	30.1	15.1
4	#12830.00	33.3 AV	68.2	-34.9	1.68 V	109	18.2	15.1
5	19245.00	59.2 PK	74.0	-14.8	1.71 V	38	63.8	-4.6
6	19245.00	46.3 AV	54.0	-7.7	1.71 V	38	50.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

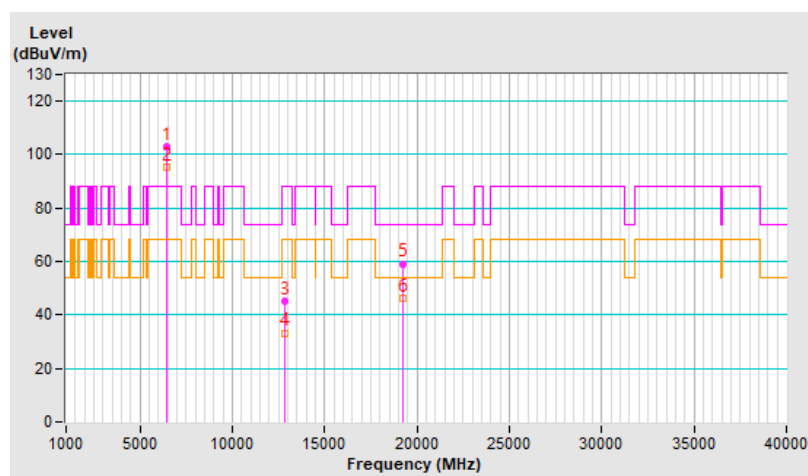


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.9 PK			1.83 H	359	100.5	7.4
2	*6535.00	98.8 AV			1.83 H	359	91.4	7.4
3	#13070.00	45.9 PK	88.2	-42.3	1.75 H	136	30.8	15.1
4	#13070.00	33.6 AV	68.2	-34.6	1.75 H	136	18.5	15.1
5	19605.00	58.2 PK	74.0	-15.8	1.75 H	6	63.0	-4.8
6	19605.00	45.3 AV	54.0	-8.7	1.75 H	6	50.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

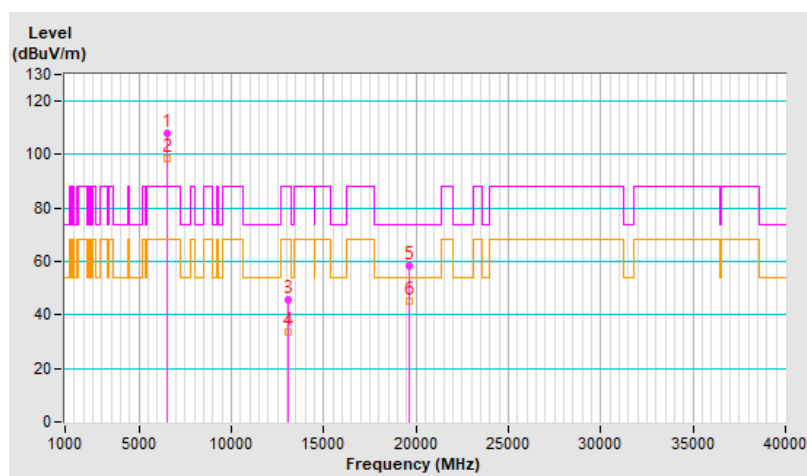


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	103.3 PK			1.09 V	222	95.9	7.4
2	*6535.00	94.4 AV			1.09 V	222	87.0	7.4
3	#13070.00	45.2 PK	88.2	-43.0	1.70 V	87	30.1	15.1
4	#13070.00	33.3 AV	68.2	-34.9	1.70 V	87	18.2	15.1
5	19605.00	59.5 PK	74.0	-14.5	1.71 V	23	64.3	-4.8
6	19605.00	46.4 AV	54.0	-7.6	1.71 V	23	51.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

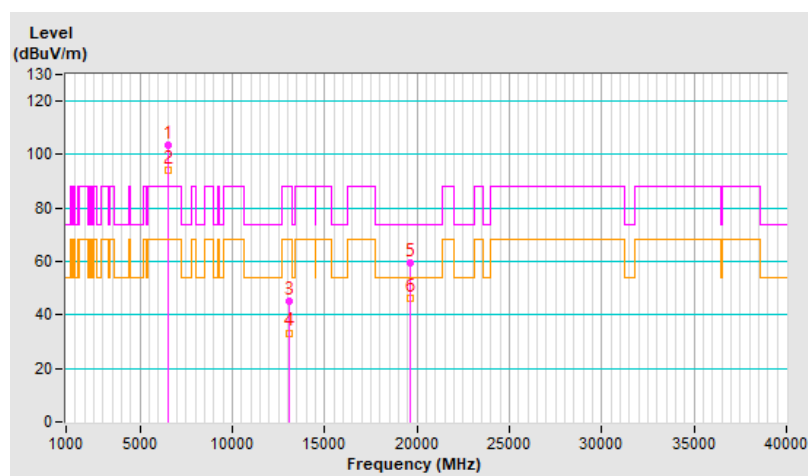


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.8 PK			1.84 H	358	99.1	7.7
2	*6695.00	98.7 AV			1.84 H	358	91.0	7.7
3	13390.00	46.2 PK	74.0	-27.8	1.78 H	117	30.8	15.4
4	13390.00	33.5 AV	54.0	-20.5	1.78 H	117	18.1	15.4
5	20085.00	57.1 PK	74.0	-16.9	1.80 H	23	61.4	-4.3
6	20085.00	44.5 AV	54.0	-9.5	1.80 H	23	48.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

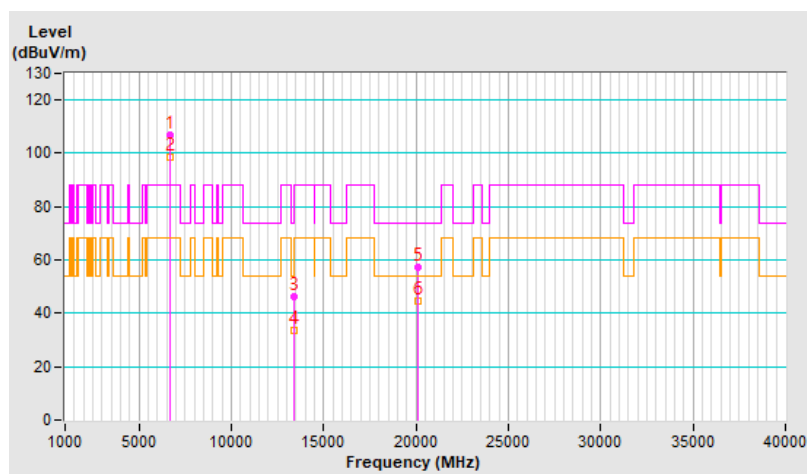


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.8 PK			1.59 V	225	96.1	7.7
2	*6695.00	95.2 AV			1.59 V	225	87.5	7.7
3	13390.00	45.0 PK	74.0	-29.0	1.67 V	89	29.6	15.4
4	13390.00	33.5 AV	54.0	-20.5	1.67 V	89	18.1	15.4
5	20085.00	58.7 PK	74.0	-15.3	1.72 V	23	63.0	-4.3
6	20085.00	45.9 AV	54.0	-8.1	1.72 V	23	50.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

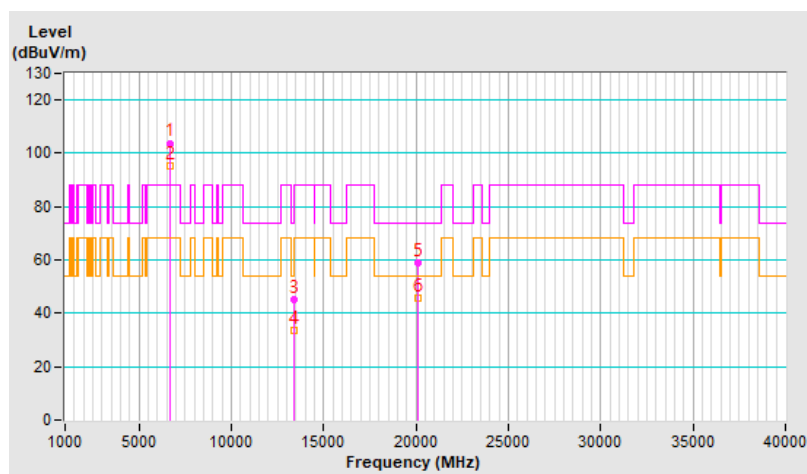


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.7 PK			2.75 H	318	99.5	8.2
2	*6855.00	99.2 AV			2.75 H	318	91.0	8.2
3	#13710.00	45.6 PK	88.2	-42.6	1.78 H	118	29.3	16.3
4	#13710.00	33.3 AV	68.2	-34.9	1.78 H	118	17.0	16.3
5	20565.00	57.6 PK	74.0	-16.4	1.83 H	5	61.3	-3.7
6	20565.00	44.7 AV	54.0	-9.3	1.83 H	5	48.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

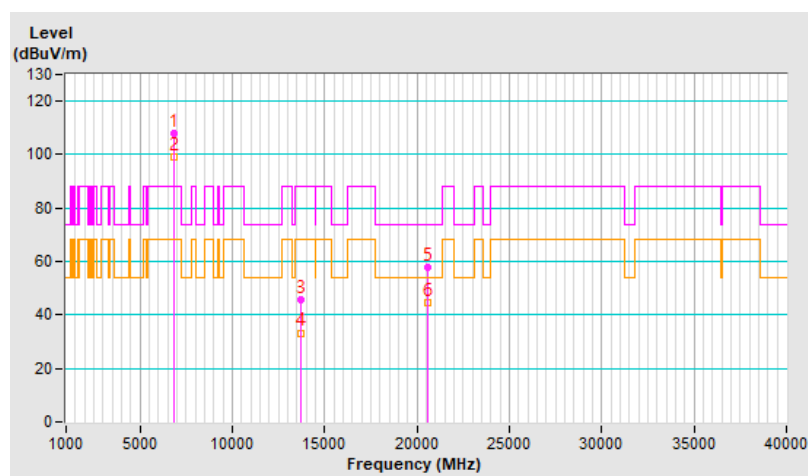


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	100.4 PK			1.36 V	224	92.2	8.2
2	*6855.00	91.7 AV			1.36 V	224	83.5	8.2
3	#13710.00	45.0 PK	88.2	-43.2	1.65 V	116	28.7	16.3
4	#13710.00	33.1 AV	68.2	-35.1	1.65 V	116	16.8	16.3
5	20565.00	59.9 PK	74.0	-14.1	1.67 V	26	63.6	-3.7
6	20565.00	46.6 AV	54.0	-7.4	1.67 V	26	50.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

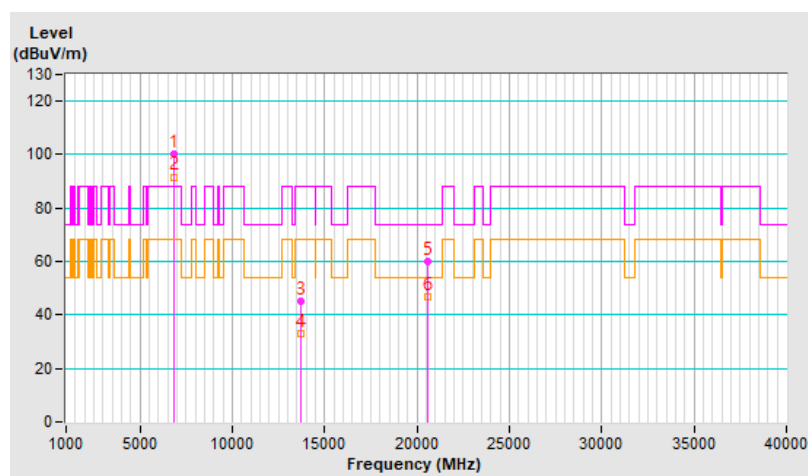


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.85 H	172	46.0	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.85 H	172	34.1	5.6
3	*5955.00	96.7 PK			1.85 H	172	91.2	5.5
4	*5955.00	85.9 AV			1.85 H	172	80.4	5.5
5	11910.00	45.9 PK	74.0	-28.1	1.77 H	155	31.3	14.6
6	11910.00	33.7 AV	54.0	-20.3	1.77 H	155	19.1	14.6
7	17865.00	57.3 PK	74.0	-16.7	1.85 H	19	31.4	25.9
8	17865.00	44.6 AV	54.0	-9.4	1.85 H	19	18.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

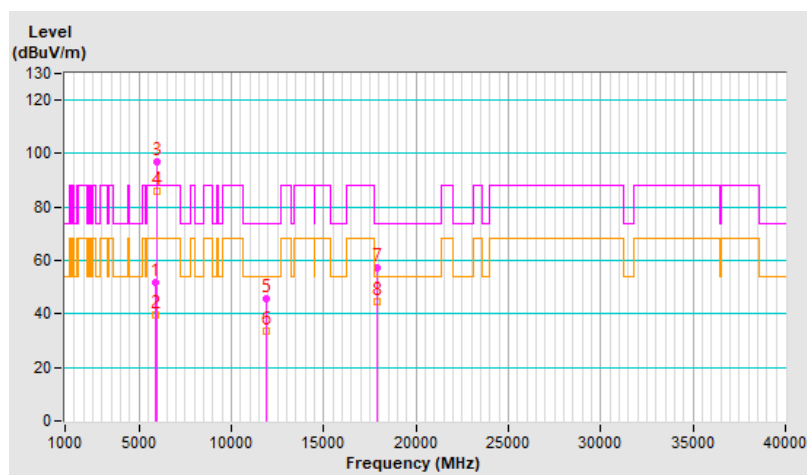


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.32 V	231	45.7	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.32 V	231	33.9	5.6
3	*5955.00	92.0 PK			1.32 V	231	86.5	5.5
4	*5955.00	81.3 AV			1.32 V	231	75.8	5.5
5	11910.00	45.7 PK	74.0	-28.3	1.60 V	96	31.1	14.6
6	11910.00	33.6 AV	54.0	-20.4	1.60 V	96	19.0	14.6
7	17865.00	60.5 PK	74.0	-13.5	1.86 V	42	34.6	25.9
8	17865.00	47.3 AV	54.0	-6.7	1.86 V	42	21.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

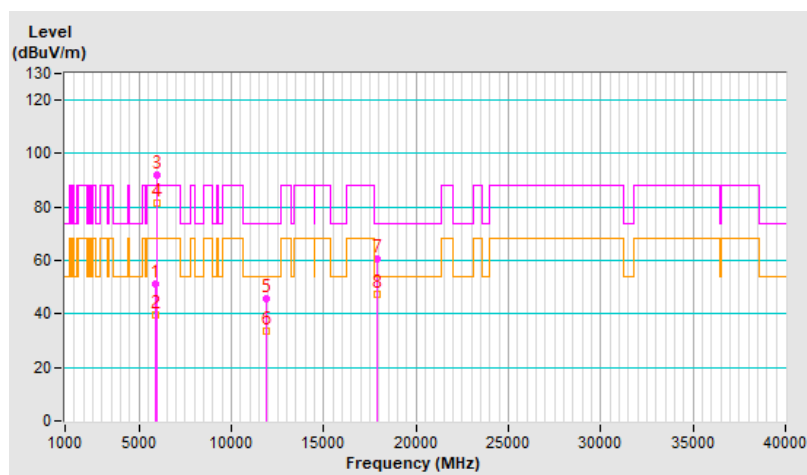


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	96.8 PK			1.80 H	166	91.0	5.8
2	*6195.00	86.3 AV			1.80 H	166	80.5	5.8
3	12390.00	46.6 PK	74.0	-27.4	1.78 H	140	31.9	14.7
4	12390.00	34.2 AV	54.0	-19.8	1.78 H	140	19.5	14.7
5	18585.00	57.5 PK	74.0	-16.5	1.84 H	0	63.0	-5.5
6	18585.00	44.7 AV	54.0	-9.3	1.84 H	0	50.2	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

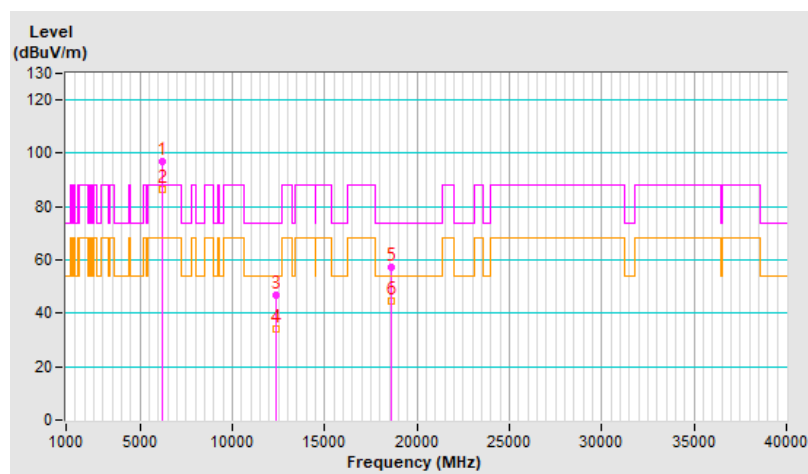


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	91.8 PK			1.35 V	228	86.0	5.8
2	*6195.00	81.0 AV			1.35 V	228	75.2	5.8
3	12390.00	46.0 PK	74.0	-28.0	1.60 V	92	31.3	14.7
4	12390.00	33.9 AV	54.0	-20.1	1.60 V	92	19.2	14.7
5	18585.00	60.8 PK	74.0	-13.2	1.75 V	59	66.3	-5.5
6	18585.00	47.6 AV	54.0	-6.4	1.75 V	59	53.1	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

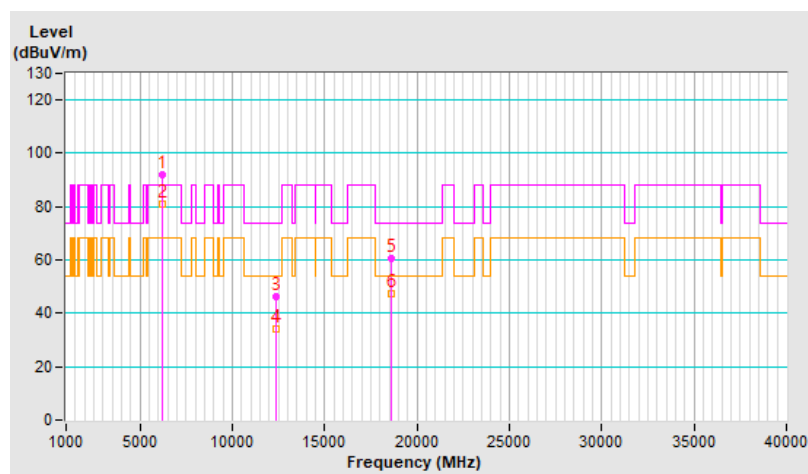


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.1 PK			1.79 H	184	89.3	6.8
2	*6415.00	85.5 AV			1.79 H	184	78.7	6.8
3	#12830.00	46.3 PK	88.2	-41.9	1.85 H	148	31.2	15.1
4	#12830.00	33.8 AV	68.2	-34.4	1.85 H	148	18.7	15.1
5	19245.00	58.0 PK	74.0	-16.0	1.86 H	27	62.6	-4.6
6	19245.00	45.5 AV	54.0	-8.5	1.86 H	27	50.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

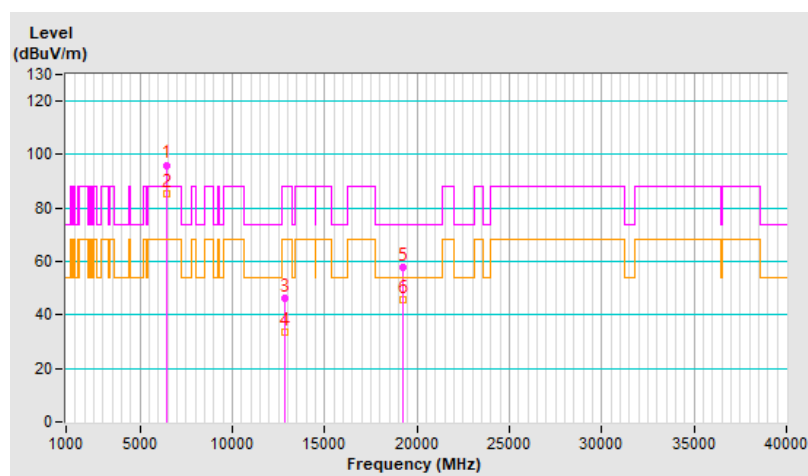


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.6 PK			1.31 V	222	85.8	6.8
2	*6415.00	81.7 AV			1.31 V	222	74.9	6.8
3	#12830.00	45.7 PK	88.2	-42.5	1.57 V	91	30.6	15.1
4	#12830.00	33.9 AV	68.2	-34.3	1.57 V	91	18.8	15.1
5	19245.00	59.6 PK	74.0	-14.4	1.87 V	48	64.2	-4.6
6	19245.00	46.8 AV	54.0	-7.2	1.87 V	48	51.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

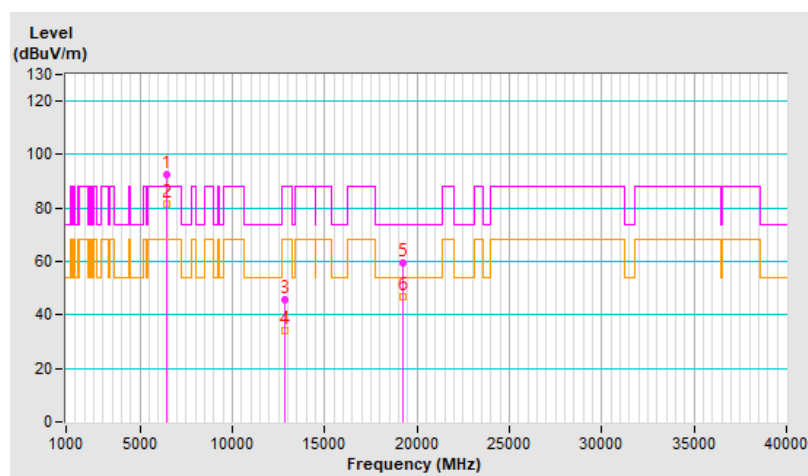


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.0 PK			1.88 H	156	88.6	7.4
2	*6535.00	85.5 AV			1.88 H	156	78.1	7.4
3	#13070.00	45.9 PK	88.2	-42.3	1.82 H	141	30.8	15.1
4	#13070.00	33.7 AV	68.2	-34.5	1.82 H	141	18.6	15.1
5	19605.00	58.0 PK	74.0	-16.0	1.78 H	0	62.8	-4.8
6	19605.00	45.0 AV	54.0	-9.0	1.78 H	0	49.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

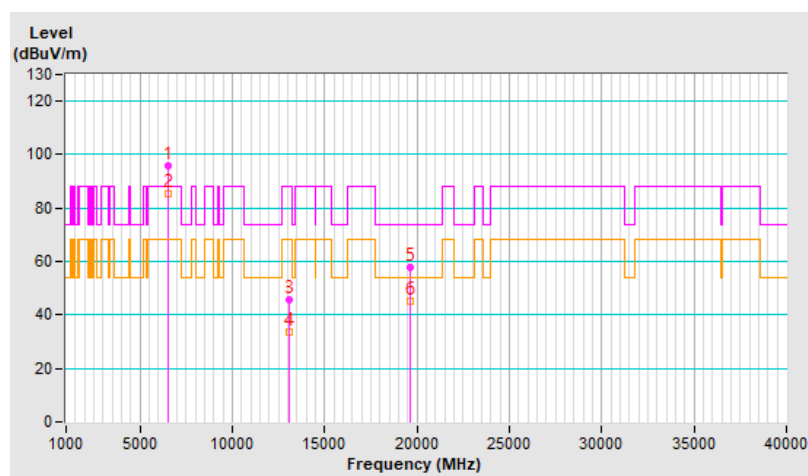


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.8 PK			1.31 V	226	84.4	7.4
2	*6535.00	81.2 AV			1.31 V	226	73.8	7.4
3	#13070.00	45.7 PK	88.2	-42.5	1.53 V	92	30.6	15.1
4	#13070.00	33.9 AV	68.2	-34.3	1.53 V	92	18.8	15.1
5	19605.00	60.8 PK	74.0	-13.2	1.82 V	67	65.6	-4.8
6	19605.00	47.5 AV	54.0	-6.5	1.82 V	67	52.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

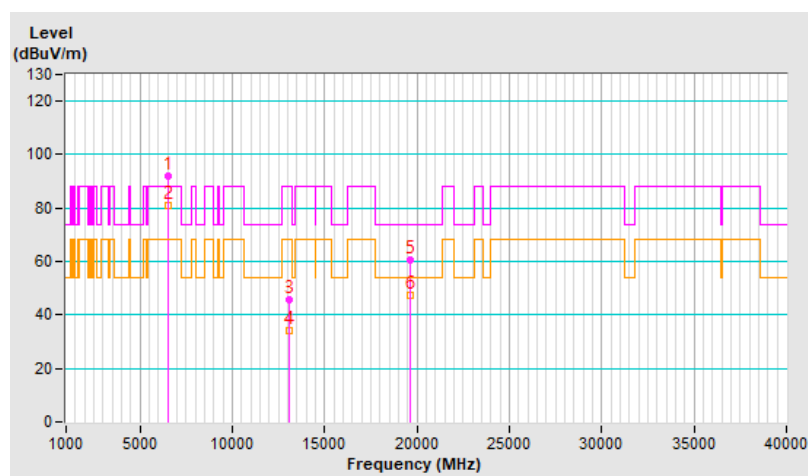


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	97.2 PK			1.82 H	164	89.5	7.7
2	*6695.00	86.4 AV			1.82 H	164	78.7	7.7
3	13390.00	45.9 PK	74.0	-28.1	1.77 H	136	30.5	15.4
4	13390.00	33.6 AV	54.0	-20.4	1.77 H	136	18.2	15.4
5	20085.00	57.7 PK	74.0	-16.3	1.80 H	0	62.0	-4.3
6	20085.00	44.9 AV	54.0	-9.1	1.80 H	0	49.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

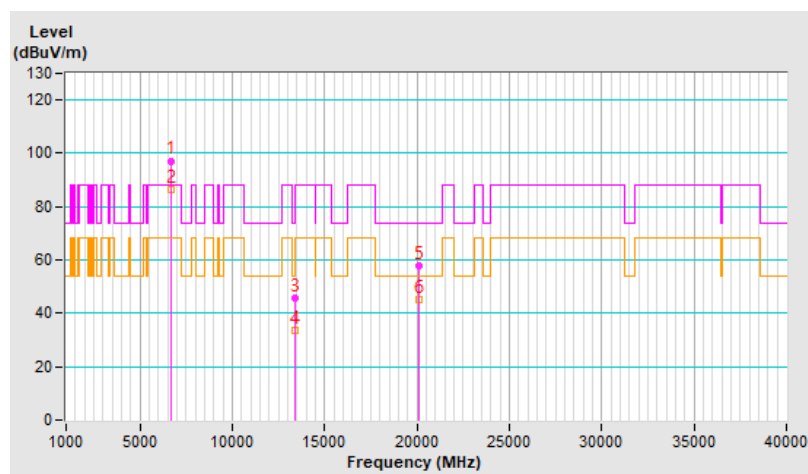


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.7 PK			1.27 V	218	85.0	7.7
2	*6695.00	81.8 AV			1.27 V	218	74.1	7.7
3	13390.00	45.4 PK	74.0	-28.6	1.53 V	111	30.0	15.4
4	13390.00	33.4 AV	54.0	-20.6	1.53 V	111	18.0	15.4
5	20085.00	59.7 PK	74.0	-14.3	1.86 V	48	64.0	-4.3
6	20085.00	46.8 AV	54.0	-7.2	1.86 V	48	51.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

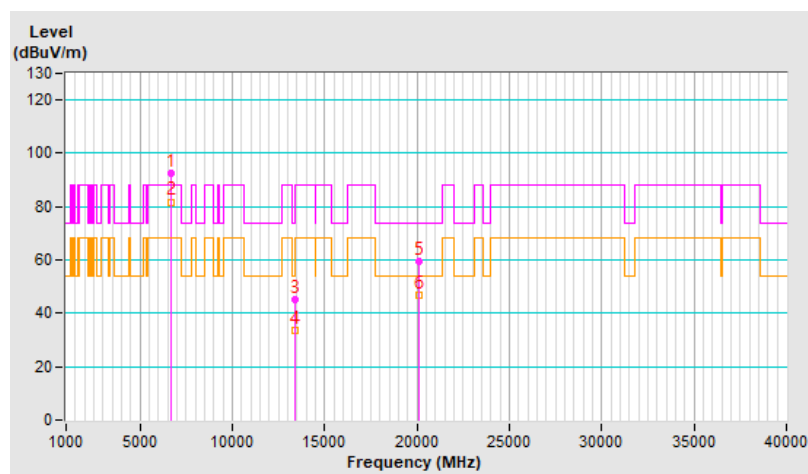


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.3 PK			1.78 H	167	87.1	8.2
2	*6855.00	84.9 AV			1.78 H	167	76.7	8.2
3	#13710.00	46.5 PK	88.2	-41.7	1.74 H	145	30.2	16.3
4	#13710.00	33.9 AV	68.2	-34.3	1.74 H	145	17.6	16.3
5	20565.00	57.3 PK	74.0	-16.7	1.80 H	16	61.0	-3.7
6	20565.00	44.7 AV	54.0	-9.3	1.80 H	16	48.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

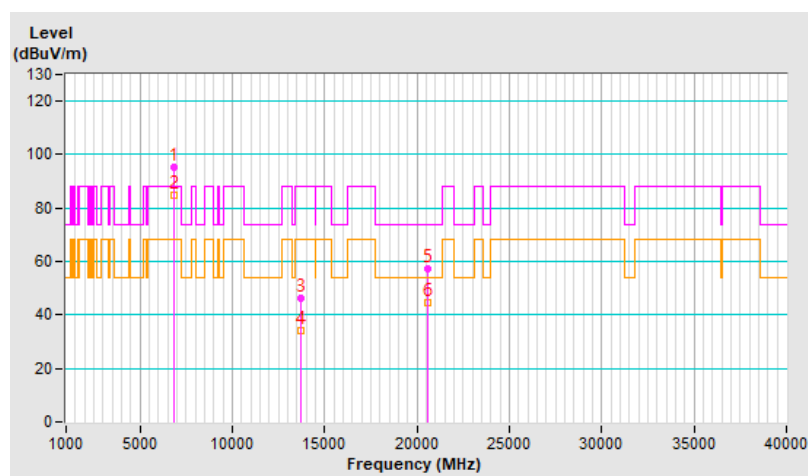


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.0 PK			1.73 V	58	84.8	8.2
2	*6855.00	81.6 AV			1.73 V	58	73.4	8.2
3	#13710.00	46.0 PK	88.2	-42.2	1.53 V	110	29.7	16.3
4	#13710.00	33.9 AV	68.2	-34.3	1.53 V	110	17.6	16.3
5	20565.00	60.0 PK	74.0	-14.0	1.76 V	54	63.7	-3.7
6	20565.00	46.8 AV	54.0	-7.2	1.76 V	54	50.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

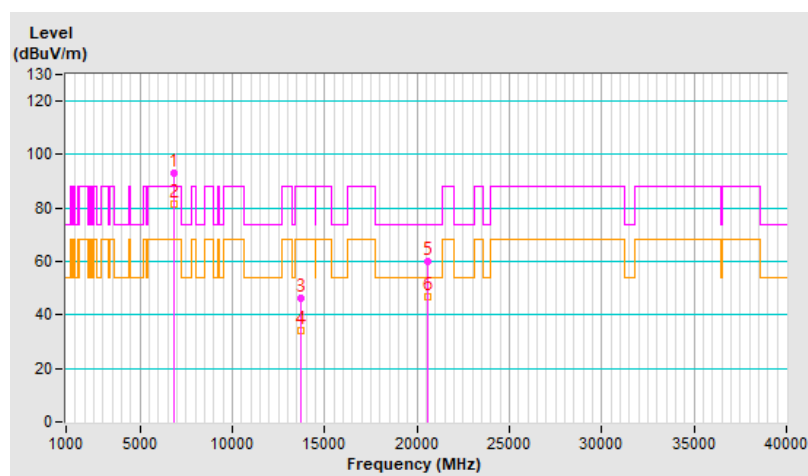


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.94 H	172	46.5	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.94 H	172	34.0	5.6
3	*5965.00	97.0 PK			1.94 H	172	91.5	5.5
4	*5965.00	86.2 AV			1.94 H	172	80.7	5.5
5	11930.00	45.8 PK	74.0	-28.2	1.74 H	157	31.3	14.5
6	11930.00	33.7 AV	54.0	-20.3	1.74 H	157	19.2	14.5
7	17895.00	57.8 PK	74.0	-16.2	1.86 H	7	31.4	26.4
8	17895.00	45.4 AV	54.0	-8.6	1.86 H	7	19.0	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

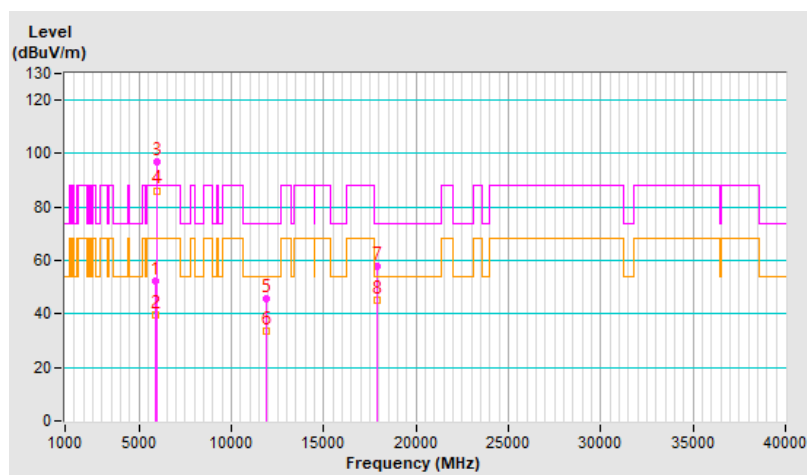


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.0 PK	88.2	-37.2	1.37 V	231	45.4	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.37 V	231	33.9	5.6
3	*5965.00	90.9 PK			1.37 V	231	85.4	5.5
4	*5965.00	80.8 AV			1.37 V	231	75.3	5.5
5	11930.00	46.2 PK	74.0	-27.8	1.60 V	101	31.7	14.5
6	11930.00	34.2 AV	54.0	-19.8	1.60 V	101	19.7	14.5
7	17895.00	60.4 PK	74.0	-13.6	1.87 V	49	34.0	26.4
8	17895.00	47.6 AV	54.0	-6.4	1.87 V	49	21.2	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

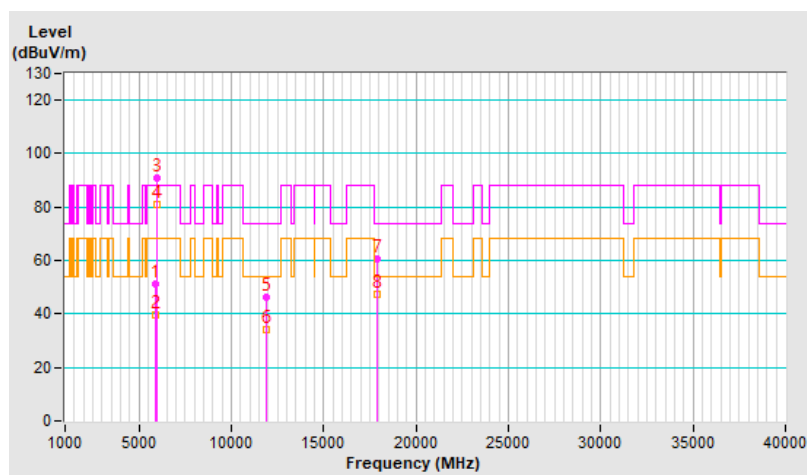


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	97.3 PK			1.90 H	178	91.4	5.9
2	*6205.00	86.4 AV			1.90 H	178	80.5	5.9
3	12410.00	46.6 PK	74.0	-27.4	1.81 H	158	31.9	14.7
4	12410.00	33.9 AV	54.0	-20.1	1.81 H	158	19.2	14.7
5	18615.00	58.2 PK	74.0	-15.8	1.86 H	1	63.6	-5.4
6	18615.00	45.4 AV	54.0	-8.6	1.86 H	1	50.8	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

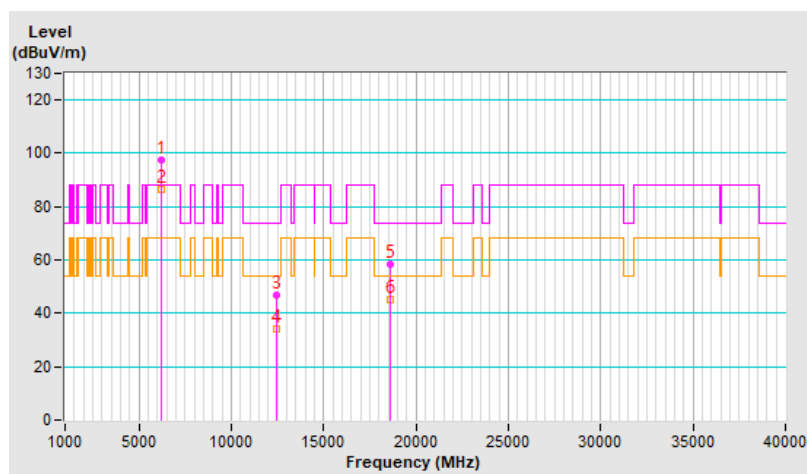


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	91.3 PK			1.33 V	245	85.4	5.9
2	*6205.00	81.1 AV			1.33 V	245	75.2	5.9
3	12410.00	45.4 PK	74.0	-28.6	1.57 V	109	30.7	14.7
4	12410.00	33.6 AV	54.0	-20.4	1.57 V	109	18.9	14.7
5	18615.00	60.0 PK	74.0	-14.0	1.84 V	54	65.4	-5.4
6	18615.00	46.9 AV	54.0	-7.1	1.84 V	54	52.3	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

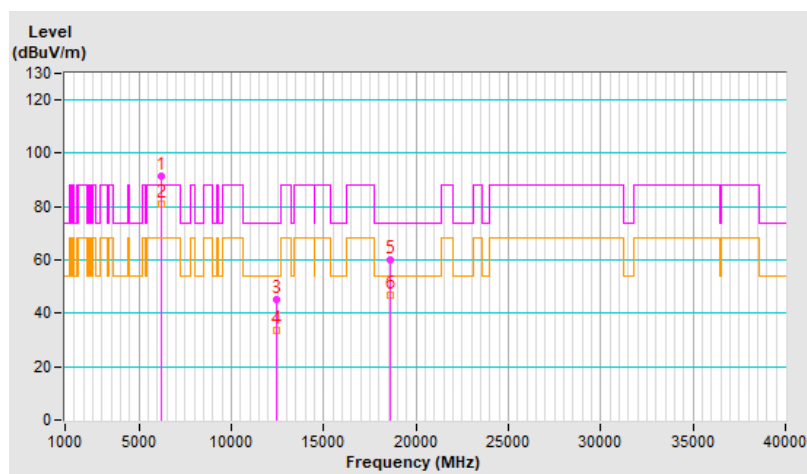


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	97.4 PK			1.89 H	185	90.7	6.7
2	*6405.00	86.7 AV			1.89 H	185	80.0	6.7
3	#12810.00	46.0 PK	88.2	-42.2	1.77 H	153	30.9	15.1
4	#12810.00	33.5 AV	68.2	-34.7	1.77 H	153	18.4	15.1
5	19215.00	57.6 PK	74.0	-16.4	1.75 H	20	62.3	-4.7
6	19215.00	44.9 AV	54.0	-9.1	1.75 H	20	49.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

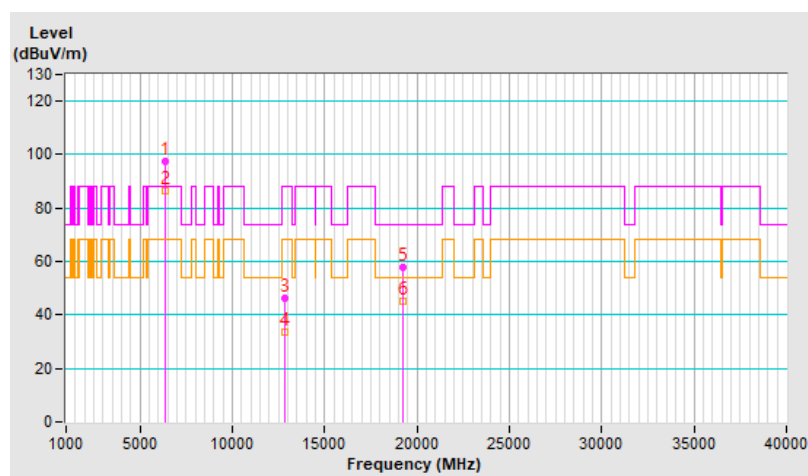


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	90.7 PK			1.39 V	229	84.0	6.7
2	*6405.00	80.8 AV			1.39 V	229	74.1	6.7
3	#12810.00	46.0 PK	88.2	-42.2	1.60 V	115	30.9	15.1
4	#12810.00	33.7 AV	68.2	-34.5	1.60 V	115	18.6	15.1
5	19215.00	60.5 PK	74.0	-13.5	1.75 V	41	65.2	-4.7
6	19215.00	47.5 AV	54.0	-6.5	1.75 V	41	52.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

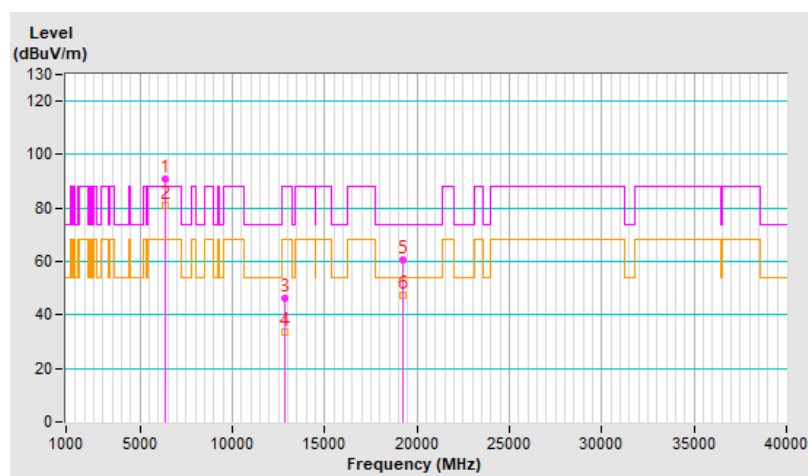


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	97.6 PK			1.90 H	170	90.1	7.5
2	*6565.00	86.5 AV			1.90 H	170	79.0	7.5
3	#13130.00	46.1 PK	88.2	-42.1	1.84 H	131	30.8	15.3
4	#13130.00	33.4 AV	68.2	-34.8	1.84 H	131	18.1	15.3
5	19695.00	58.4 PK	74.0	-15.6	1.78 H	0	62.8	-4.4
6	19695.00	45.5 AV	54.0	-8.5	1.78 H	0	49.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

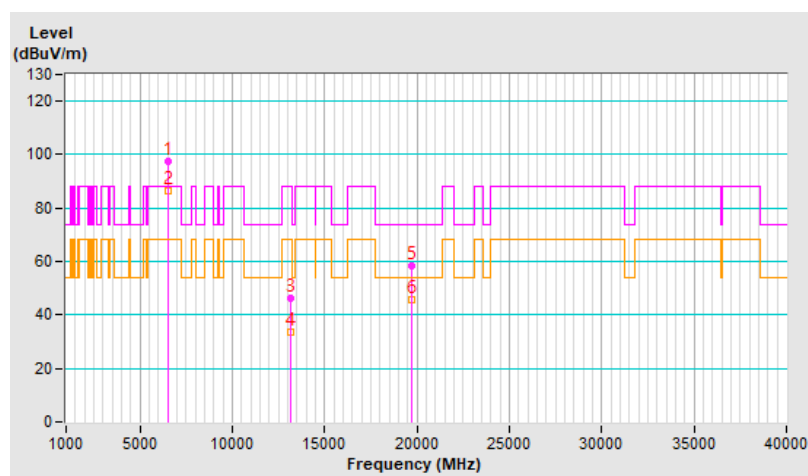


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	90.9 PK			1.33 V	233	83.4	7.5
2	*6565.00	80.9 AV			1.33 V	233	73.4	7.5
3	#13130.00	45.2 PK	88.2	-43.0	1.59 V	99	29.9	15.3
4	#13130.00	33.4 AV	68.2	-34.8	1.59 V	99	18.1	15.3
5	19695.00	59.8 PK	74.0	-14.2	1.86 V	65	64.2	-4.4
6	19695.00	47.0 AV	54.0	-7.0	1.86 V	65	51.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

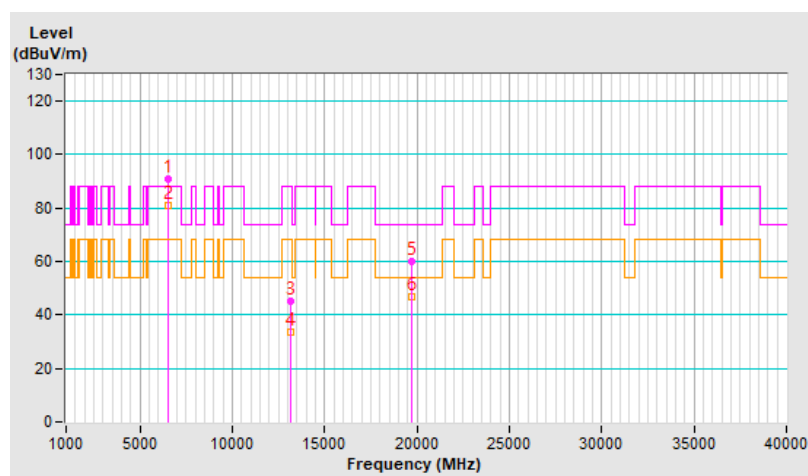


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	97.9 PK			1.85 H	191	90.2	7.7
2	*6685.00	86.9 AV			1.85 H	191	79.2	7.7
3	13370.00	46.2 PK	74.0	-27.8	1.74 H	158	30.9	15.3
4	13370.00	33.7 AV	54.0	-20.3	1.74 H	158	18.4	15.3
5	20055.00	57.4 PK	74.0	-16.6	1.85 H	2	61.8	-4.4
6	20055.00	44.7 AV	54.0	-9.3	1.85 H	2	49.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

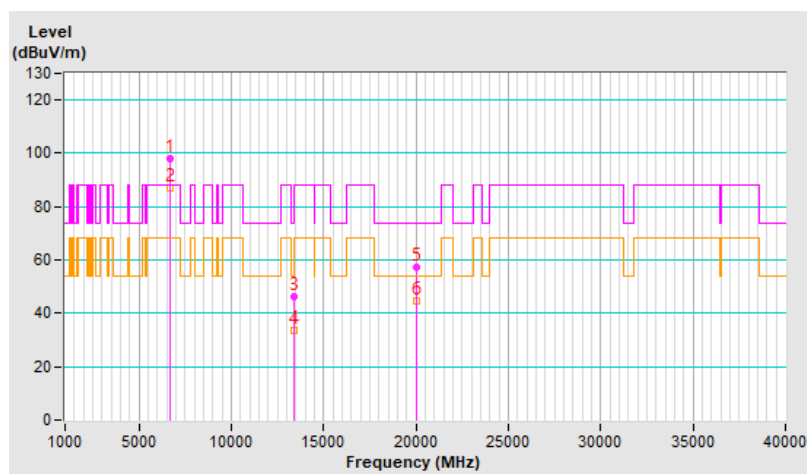


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	90.6 PK			1.38 V	243	82.9	7.7
2	*6685.00	80.6 AV			1.38 V	243	72.9	7.7
3	13370.00	46.3 PK	74.0	-27.7	1.57 V	98	31.0	15.3
4	13370.00	34.2 AV	54.0	-19.8	1.57 V	98	18.9	15.3
5	20055.00	60.3 PK	74.0	-13.7	1.82 V	44	64.7	-4.4
6	20055.00	47.2 AV	54.0	-6.8	1.82 V	44	51.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

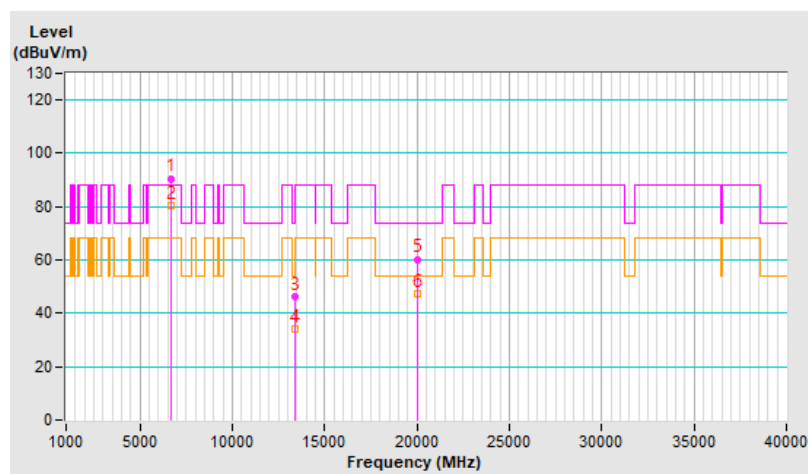


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	95.9 PK			1.78 H	171	87.7	8.2
2	*6845.00	84.5 AV			1.78 H	171	76.3	8.2
3	#13690.00	46.1 PK	88.2	-42.1	1.79 H	139	29.8	16.3
4	#13690.00	33.9 AV	68.2	-34.3	1.79 H	139	17.6	16.3
5	20535.00	57.6 PK	74.0	-16.4	1.76 H	24	61.3	-3.7
6	20535.00	45.0 AV	54.0	-9.0	1.76 H	24	48.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

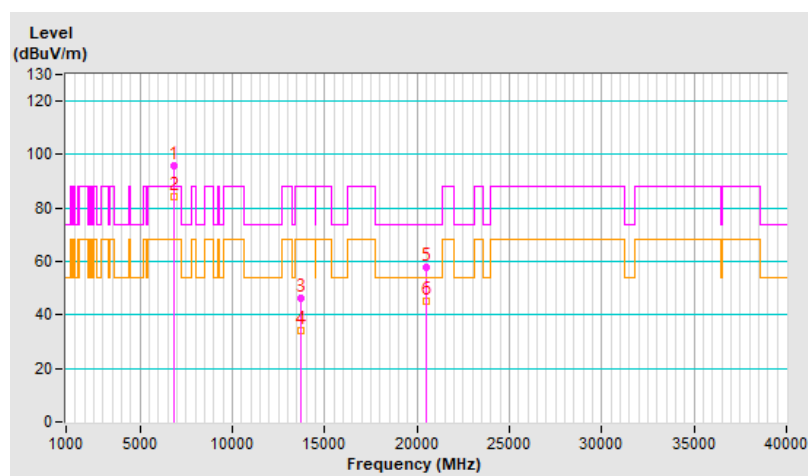


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	92.0 PK			1.86 V	55	83.8	8.2
2	*6845.00	81.0 AV			1.86 V	55	72.8	8.2
3	#13690.00	45.8 PK	88.2	-42.4	1.53 V	100	29.5	16.3
4	#13690.00	33.5 AV	68.2	-34.7	1.53 V	100	17.2	16.3
5	20535.00	60.2 PK	74.0	-13.8	1.76 V	43	63.9	-3.7
6	20535.00	47.1 AV	54.0	-6.9	1.76 V	43	50.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

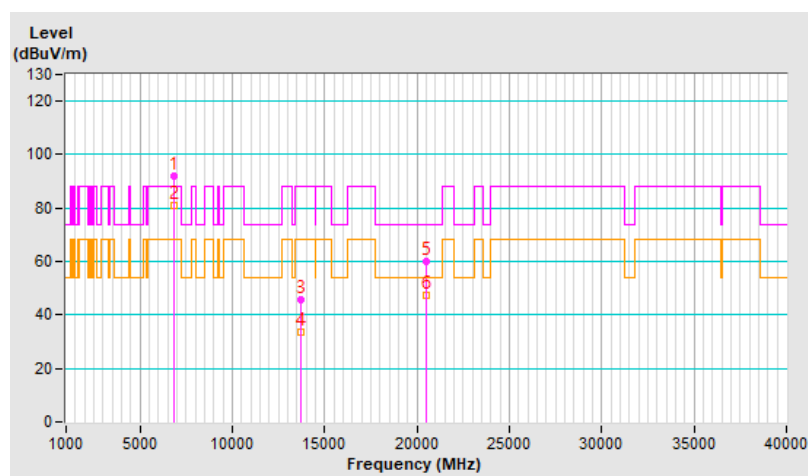


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	1.97 H	171	46.4	5.6
2	#5925.00	40.5 AV	68.2	-27.7	1.97 H	171	34.9	5.6
3	*5985.00	98.1 PK			1.97 H	171	92.6	5.5
4	*5985.00	87.4 AV			1.97 H	171	81.9	5.5
5	11970.00	46.5 PK	74.0	-27.5	1.76 H	146	32.0	14.5
6	11970.00	34.0 AV	54.0	-20.0	1.76 H	146	19.5	14.5
7	17955.00	57.4 PK	74.0	-16.6	1.81 H	5	29.1	28.3
8	17955.00	44.8 AV	54.0	-9.2	1.81 H	5	16.5	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

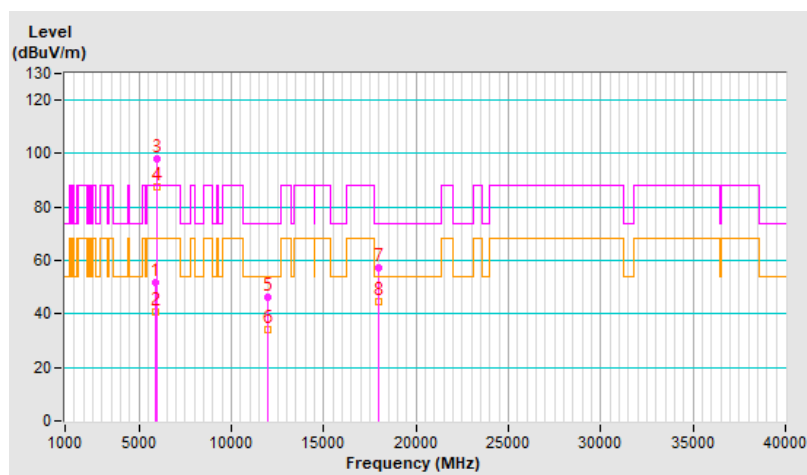


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.72 V	228	45.6	5.6
2	#5925.00	40.0 AV	68.2	-28.2	1.72 V	228	34.4	5.6
3	*5985.00	94.2 PK			1.72 V	228	88.7	5.5
4	*5985.00	82.9 AV			1.72 V	228	77.4	5.5
5	11970.00	46.4 PK	74.0	-27.6	1.52 V	99	31.9	14.5
6	11970.00	34.2 AV	54.0	-19.8	1.52 V	99	19.7	14.5
7	17955.00	60.2 PK	74.0	-13.8	1.84 V	48	31.9	28.3
8	17955.00	47.1 AV	54.0	-6.9	1.84 V	48	18.8	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

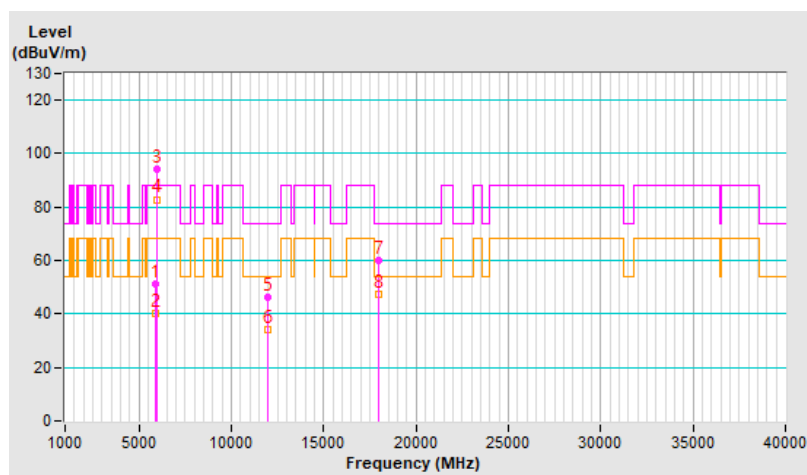


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	98.0 PK			1.95 H	165	92.1	5.9
2	*6225.00	87.4 AV			1.95 H	165	81.5	5.9
3	12450.00	46.4 PK	74.0	-27.6	1.79 H	157	31.8	14.6
4	12450.00	34.0 AV	54.0	-20.0	1.79 H	157	19.4	14.6
5	18675.00	58.0 PK	74.0	-16.0	1.76 H	8	63.3	-5.3
6	18675.00	45.4 AV	54.0	-8.6	1.76 H	8	50.7	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

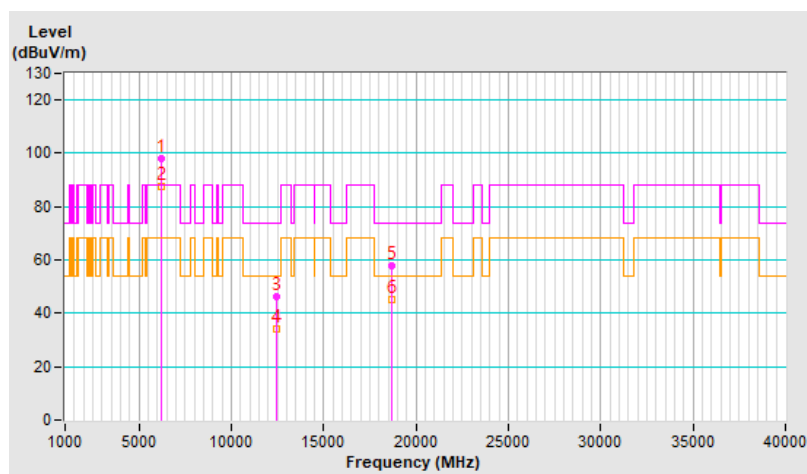


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	94.7 PK			1.66 V	220	88.8	5.9
2	*6225.00	83.3 AV			1.66 V	220	77.4	5.9
3	12450.00	45.6 PK	74.0	-28.4	1.55 V	90	31.0	14.6
4	12450.00	33.4 AV	54.0	-20.6	1.55 V	90	18.8	14.6
5	18675.00	60.1 PK	74.0	-13.9	1.76 V	62	65.4	-5.3
6	18675.00	47.0 AV	54.0	-7.0	1.76 V	62	52.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

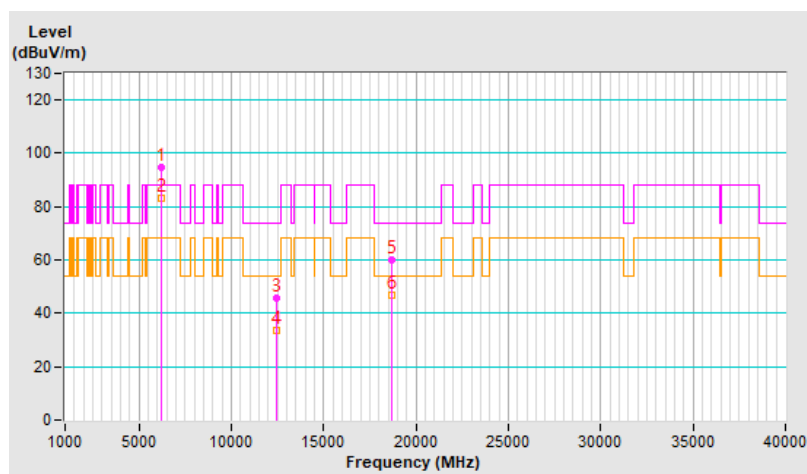


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	98.1 PK			2.02 H	164	91.5	6.6
2	*6385.00	87.7 AV			2.02 H	164	81.1	6.6
3	#12770.00	46.0 PK	88.2	-42.2	1.78 H	131	31.1	14.9
4	#12770.00	33.5 AV	68.2	-34.7	1.78 H	131	18.6	14.9
5	19155.00	57.8 PK	74.0	-16.2	1.85 H	0	62.5	-4.7
6	19155.00	45.3 AV	54.0	-8.7	1.85 H	0	50.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

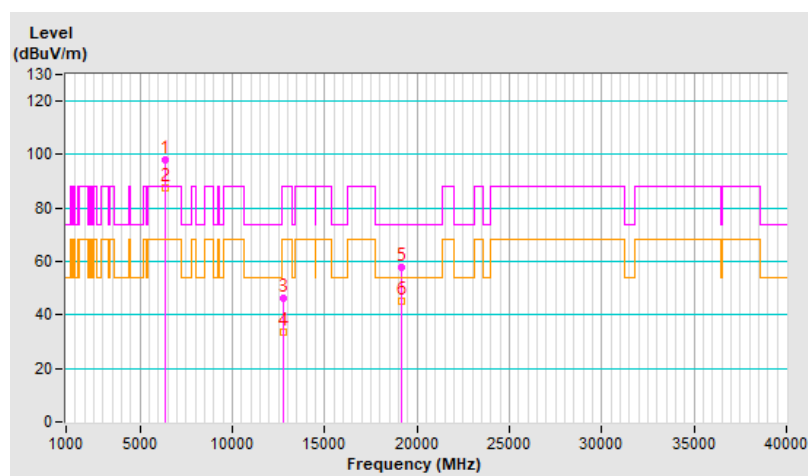


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	94.4 PK			1.68 V	214	87.8	6.6
2	*6385.00	82.9 AV			1.68 V	214	76.3	6.6
3	#12770.00	45.8 PK	88.2	-42.4	1.55 V	90	30.9	14.9
4	#12770.00	34.1 AV	68.2	-34.1	1.55 V	90	19.2	14.9
5	19155.00	60.9 PK	74.0	-13.1	1.77 V	54	65.6	-4.7
6	19155.00	47.6 AV	54.0	-6.4	1.77 V	54	52.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

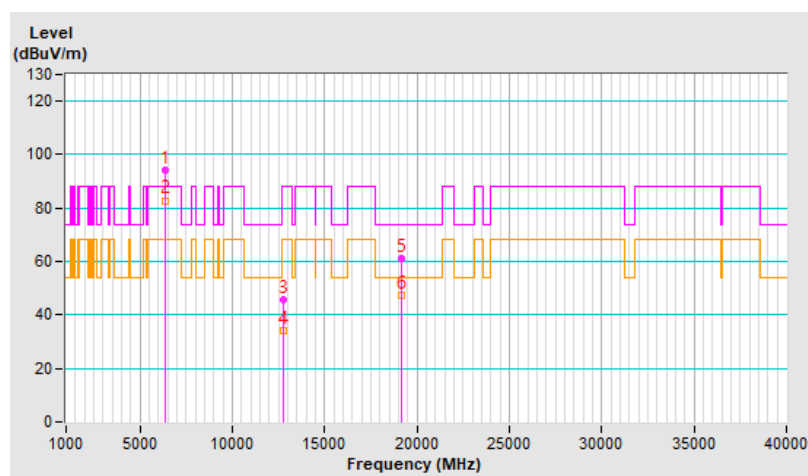


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	97.4 PK			1.94 H	173	89.6	7.8
2	*6625.00	87.0 AV			1.94 H	173	79.2	7.8
3	13250.00	46.4 PK	74.0	-27.6	1.80 H	159	31.0	15.4
4	13250.00	33.8 AV	54.0	-20.2	1.80 H	159	18.4	15.4
5	19875.00	57.0 PK	74.0	-17.0	1.76 H	3	61.5	-4.5
6	19875.00	44.6 AV	54.0	-9.4	1.76 H	3	49.1	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

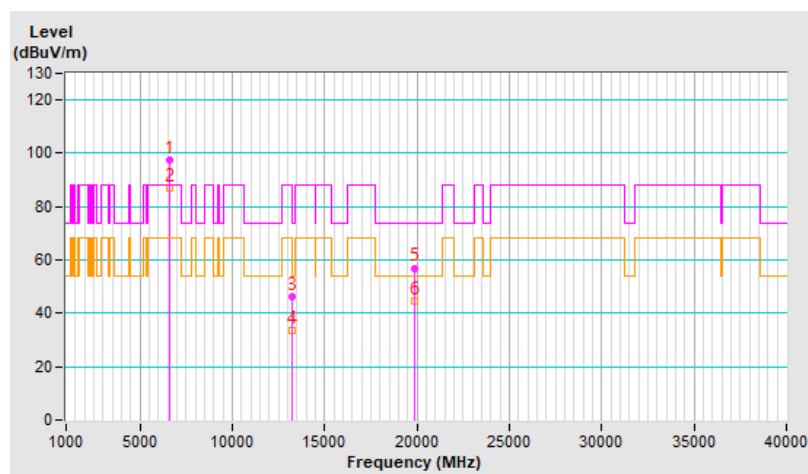


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	94.3 PK			1.75 V	240	86.5	7.8
2	*6625.00	83.2 AV			1.75 V	240	75.4	7.8
3	13250.00	45.1 PK	74.0	-28.9	1.62 V	116	29.7	15.4
4	13250.00	33.3 AV	54.0	-20.7	1.62 V	116	17.9	15.4
5	19875.00	60.5 PK	74.0	-13.5	1.76 V	47	65.0	-4.5
6	19875.00	47.5 AV	54.0	-6.5	1.76 V	47	52.0	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

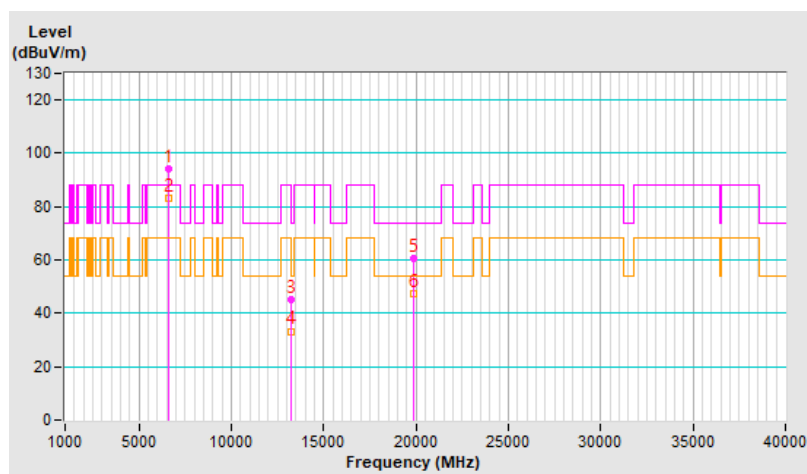


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	98.0 PK			1.95 H	176	90.4	7.6
2	*6705.00	87.1 AV			1.95 H	176	79.5	7.6
3	#13410.00	45.9 PK	88.2	-42.3	1.83 H	137	30.5	15.4
4	#13410.00	33.8 AV	68.2	-34.4	1.83 H	137	18.4	15.4
5	20115.00	57.7 PK	74.0	-16.3	1.83 H	0	61.8	-4.1
6	20115.00	45.0 AV	54.0	-9.0	1.83 H	0	49.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

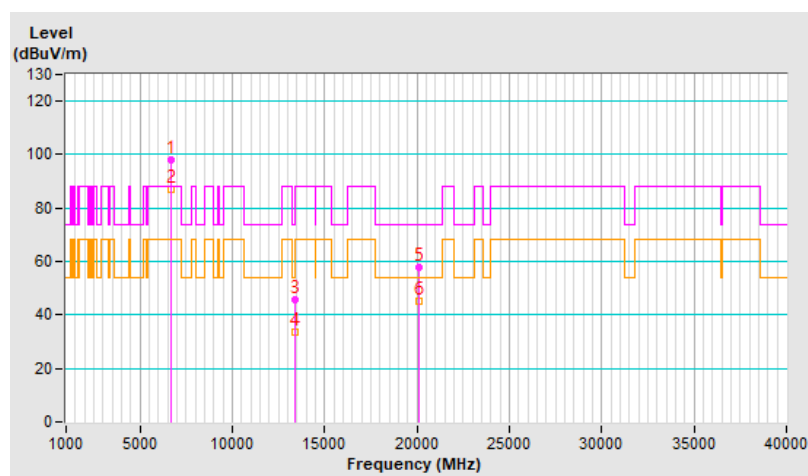


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	94.6 PK			1.73 V	230	87.0	7.6
2	*6705.00	83.2 AV			1.73 V	230	75.6	7.6
3	#13410.00	46.1 PK	88.2	-42.1	1.53 V	91	30.7	15.4
4	#13410.00	33.9 AV	68.2	-34.3	1.53 V	91	18.5	15.4
5	20115.00	60.0 PK	74.0	-14.0	1.78 V	51	64.1	-4.1
6	20115.00	46.6 AV	54.0	-7.4	1.78 V	51	50.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

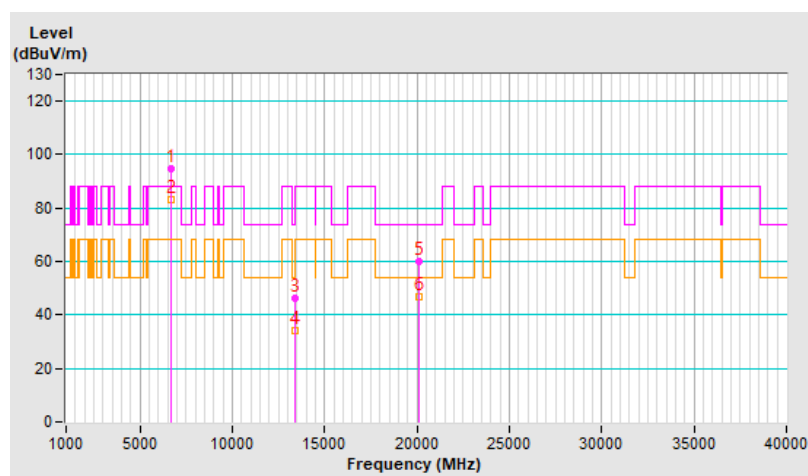


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	98.4 PK			1.82 H	168	90.7	7.7
2	*6785.00	85.6 AV			1.82 H	168	77.9	7.7
3	#13570.00	46.9 PK	88.2	-41.3	1.85 H	139	31.2	15.7
4	#13570.00	34.4 AV	68.2	-33.8	1.85 H	139	18.7	15.7
5	20355.00	57.5 PK	74.0	-16.5	1.77 H	4	61.3	-3.8
6	20355.00	45.0 AV	54.0	-9.0	1.77 H	4	48.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

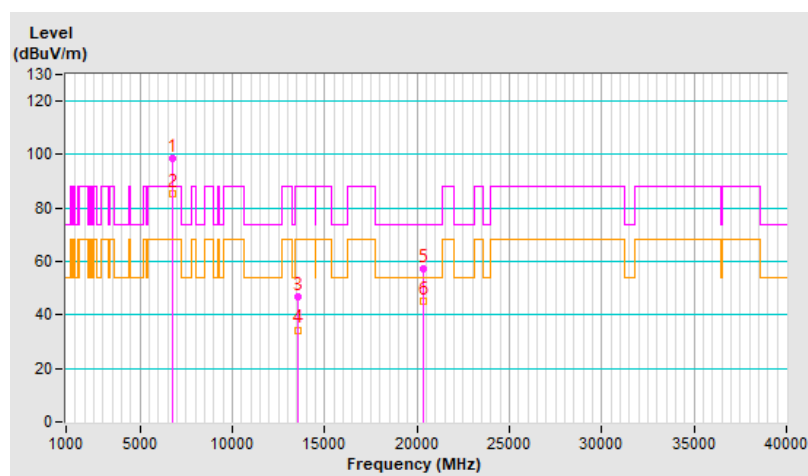


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	92.8 PK			1.74 V	58	85.1	7.7
2	*6785.00	81.9 AV			1.74 V	58	74.2	7.7
3	#13570.00	45.8 PK	88.2	-42.4	1.63 V	113	30.1	15.7
4	#13570.00	33.5 AV	68.2	-34.7	1.63 V	113	17.8	15.7
5	20355.00	59.8 PK	74.0	-14.2	1.76 V	39	63.6	-3.8
6	20355.00	47.0 AV	54.0	-7.0	1.76 V	39	50.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

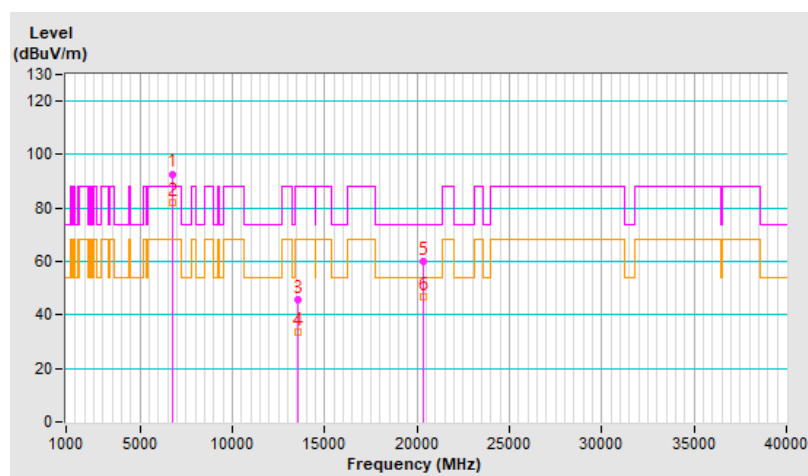


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.7 PK	88.2	-26.5	1.88 H	172	56.1	5.6
2	#5925.00	43.1 AV	68.2	-25.1	1.88 H	172	37.5	5.6
3	*6025.00	97.9 PK			1.88 H	172	92.3	5.6
4	*6025.00	86.1 AV			1.88 H	172	80.5	5.6
5	12050.00	46.9 PK	74.0	-27.1	1.78 H	151	32.3	14.6
6	12050.00	34.3 AV	54.0	-19.7	1.78 H	151	19.7	14.6
7	18075.00	57.2 PK	74.0	-16.8	1.77 H	3	62.5	-5.3
8	18075.00	44.7 AV	54.0	-9.3	1.77 H	3	50.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

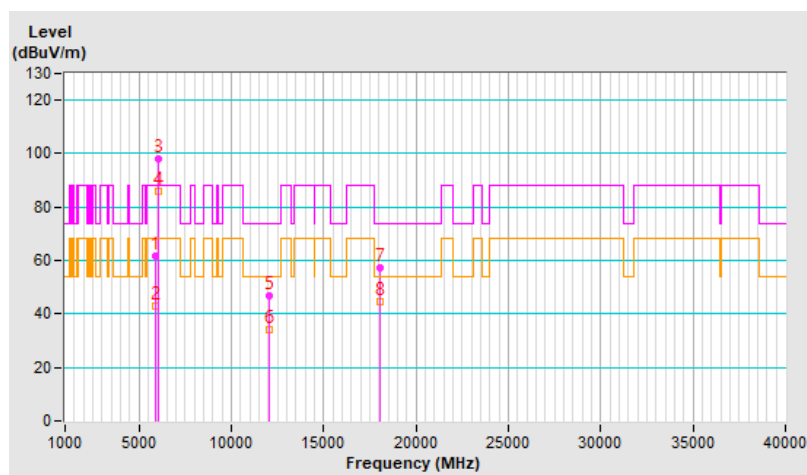


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	1.41 V	333	47.2	5.6
2	#5925.00	41.0 AV	68.2	-27.2	1.41 V	333	35.4	5.6
3	*6025.00	91.5 PK			1.41 V	333	85.9	5.6
4	*6025.00	81.2 AV			1.41 V	333	75.6	5.6
5	12050.00	45.8 PK	74.0	-28.2	1.54 V	93	31.2	14.6
6	12050.00	33.8 AV	54.0	-20.2	1.54 V	93	19.2	14.6
7	18075.00	60.0 PK	74.0	-14.0	1.77 V	63	65.3	-5.3
8	18075.00	46.9 AV	54.0	-7.1	1.77 V	63	52.2	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

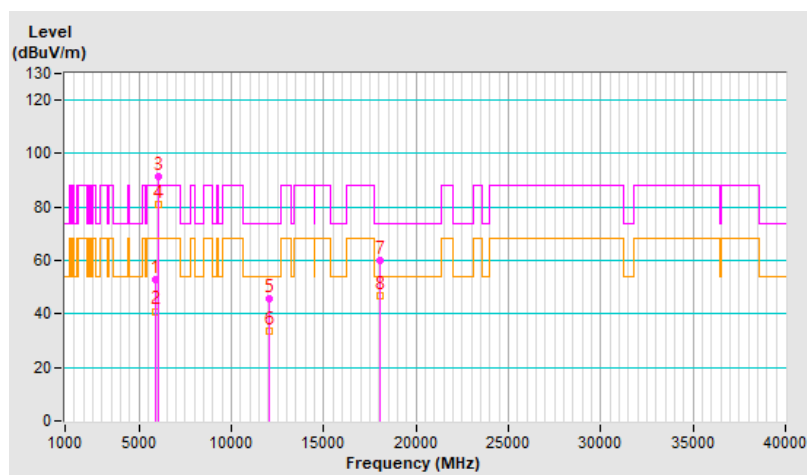


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	97.6 PK			1.84 H	174	91.8	5.8
2	*6185.00	85.7 AV			1.84 H	174	79.9	5.8
3	12370.00	46.1 PK	74.0	-27.9	1.83 H	140	31.4	14.7
4	12370.00	33.5 AV	54.0	-20.5	1.83 H	140	18.8	14.7
5	18555.00	58.5 PK	74.0	-15.5	1.79 H	15	63.9	-5.4
6	18555.00	45.5 AV	54.0	-8.5	1.79 H	15	50.9	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

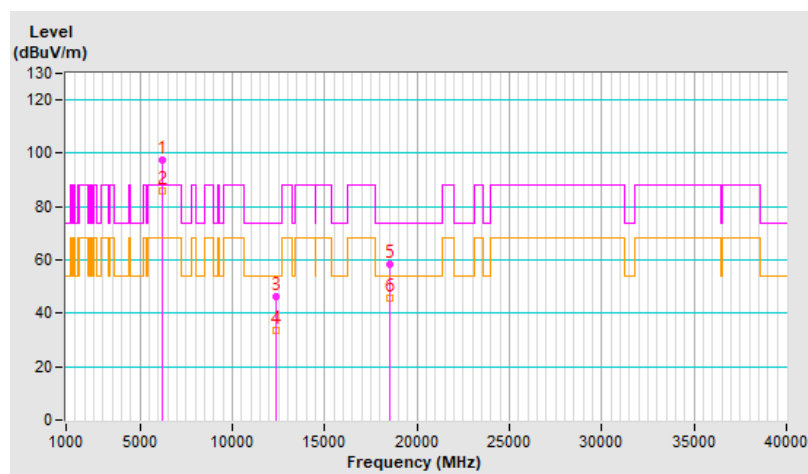


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	91.1 PK			1.46 V	328	85.3	5.8
2	*6185.00	80.7 AV			1.46 V	328	74.9	5.8
3	12370.00	45.7 PK	74.0	-28.3	1.61 V	95	31.0	14.7
4	12370.00	33.8 AV	54.0	-20.2	1.61 V	95	19.1	14.7
5	18555.00	60.2 PK	74.0	-13.8	1.86 V	45	65.6	-5.4
6	18555.00	46.9 AV	54.0	-7.1	1.86 V	45	52.3	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

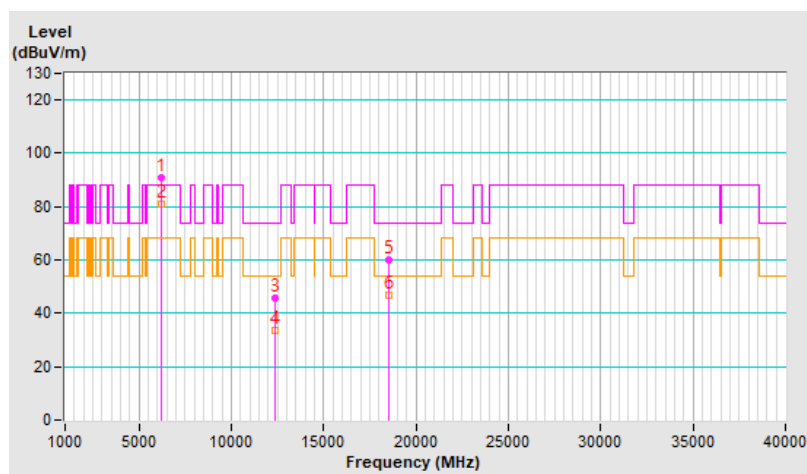


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	98.1 PK			1.93 H	170	91.7	6.4
2	*6345.00	86.3 AV			1.93 H	170	79.9	6.4
3	12690.00	46.0 PK	74.0	-28.0	1.74 H	136	31.1	14.9
4	12690.00	33.8 AV	54.0	-20.2	1.74 H	136	18.9	14.9
5	19035.00	57.7 PK	74.0	-16.3	1.77 H	6	62.6	-4.9
6	19035.00	45.1 AV	54.0	-8.9	1.77 H	6	50.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

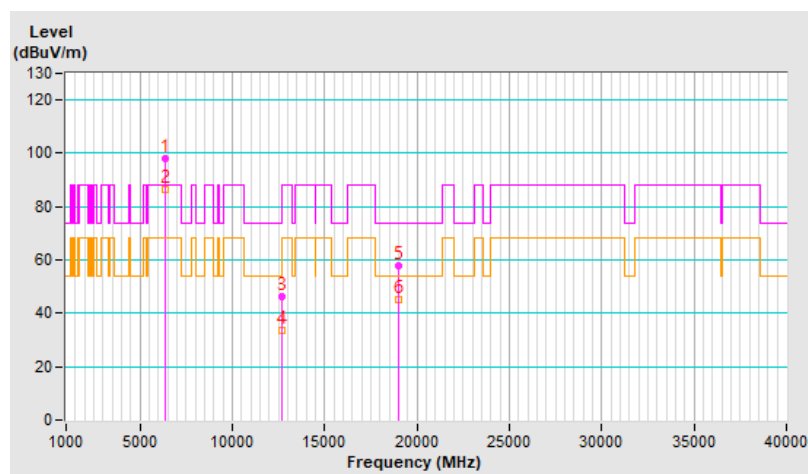


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	91.2 PK			1.37 V	337	84.8	6.4
2	*6345.00	81.0 AV			1.37 V	337	74.6	6.4
3	12690.00	45.3 PK	74.0	-28.7	1.62 V	105	30.4	14.9
4	12690.00	33.3 AV	54.0	-20.7	1.62 V	105	18.4	14.9
5	19035.00	59.6 PK	74.0	-14.4	1.80 V	67	64.5	-4.9
6	19035.00	46.6 AV	54.0	-7.4	1.80 V	67	51.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

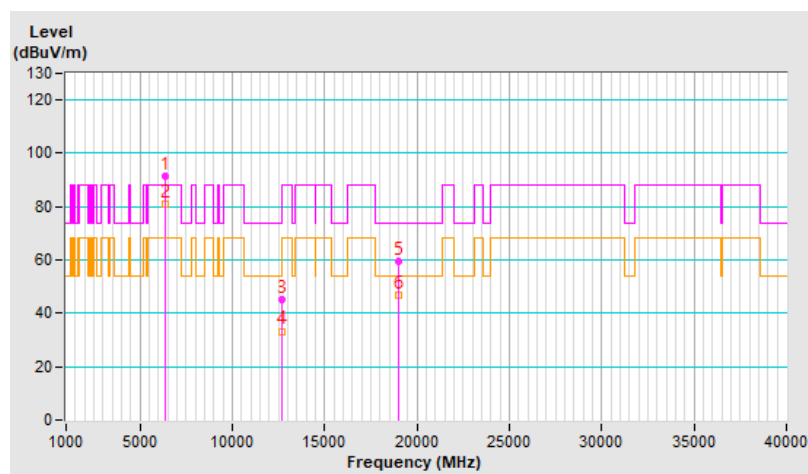


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.8 PK			2.77 H	173	89.0	7.8
2	*6665.00	85.7 AV			2.77 H	173	77.9	7.8
3	13330.00	46.1 PK	74.0	-27.9	1.73 H	145	30.8	15.3
4	13330.00	33.6 AV	54.0	-20.4	1.73 H	145	18.3	15.3
5	19995.00	58.0 PK	74.0	-16.0	1.86 H	25	62.4	-4.4
6	19995.00	45.4 AV	54.0	-8.6	1.86 H	25	49.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

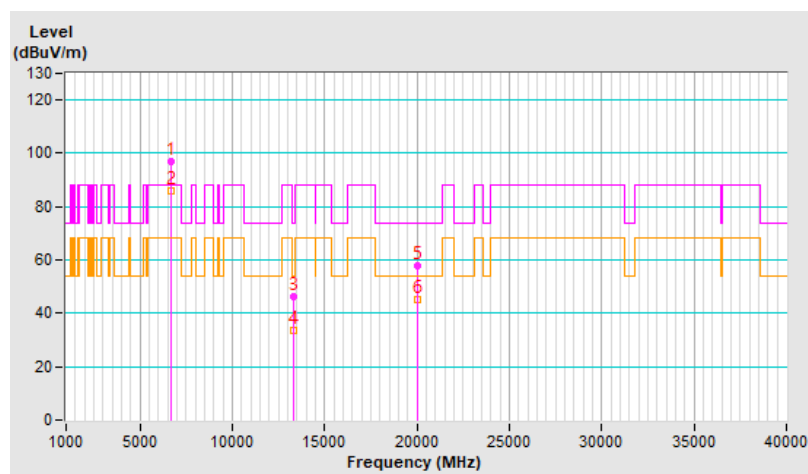


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	91.6 PK			1.83 V	147	83.8	7.8
2	*6665.00	80.4 AV			1.83 V	147	72.6	7.8
3	13330.00	45.4 PK	74.0	-28.6	1.57 V	100	30.1	15.3
4	13330.00	33.6 AV	54.0	-20.4	1.57 V	100	18.3	15.3
5	19995.00	60.3 PK	74.0	-13.7	1.80 V	52	64.7	-4.4
6	19995.00	47.1 AV	54.0	-6.9	1.80 V	52	51.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

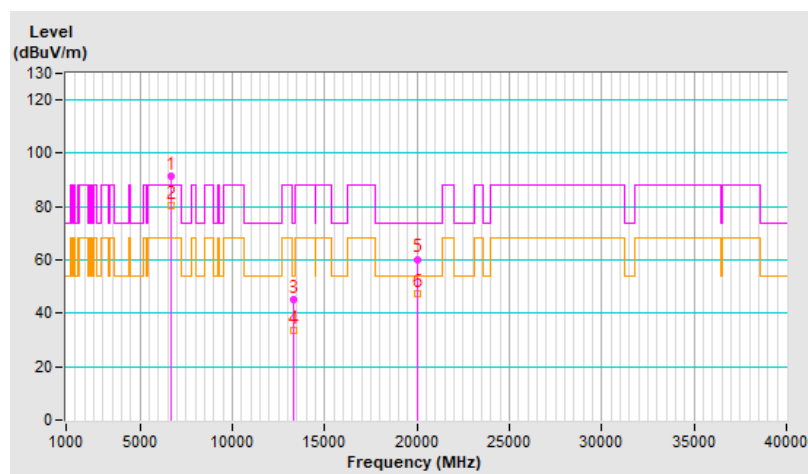


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.68 H	332	45.6	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.68 H	332	33.9	5.6
3	*5955.00	90.7 PK			1.68 H	332	85.2	5.5
4	*5955.00	81.4 AV			1.68 H	332	75.9	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.82 H	127	31.6	14.6
6	11910.00	33.7 AV	54.0	-20.3	1.82 H	127	19.1	14.6
7	17865.00	58.3 PK	74.0	-15.7	1.79 H	4	32.4	25.9
8	17865.00	45.0 AV	54.0	-9.0	1.79 H	4	19.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

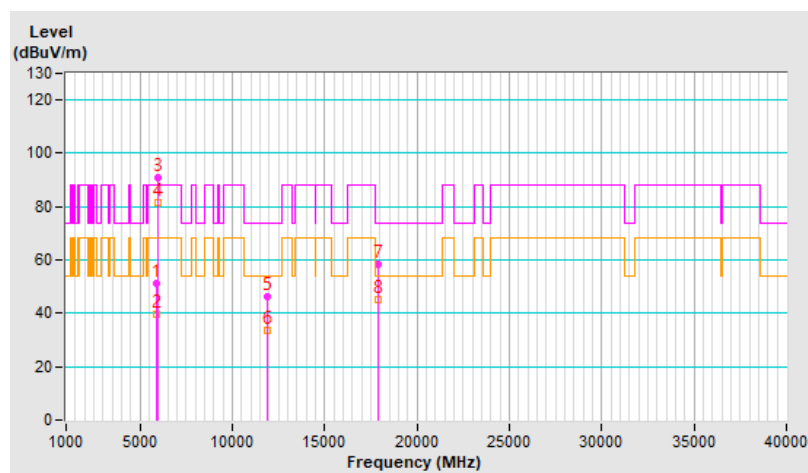


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.67 V	332	45.9	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.67 V	332	33.8	5.6
3	*5955.00	90.5 PK			1.67 V	332	85.0	5.5
4	*5955.00	79.8 AV			1.67 V	332	74.3	5.5
5	11910.00	45.8 PK	74.0	-28.2	1.62 V	103	31.2	14.6
6	11910.00	33.5 AV	54.0	-20.5	1.62 V	103	18.9	14.6
7	17865.00	59.3 PK	74.0	-14.7	1.74 V	30	33.4	25.9
8	17865.00	46.8 AV	54.0	-7.2	1.74 V	30	20.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

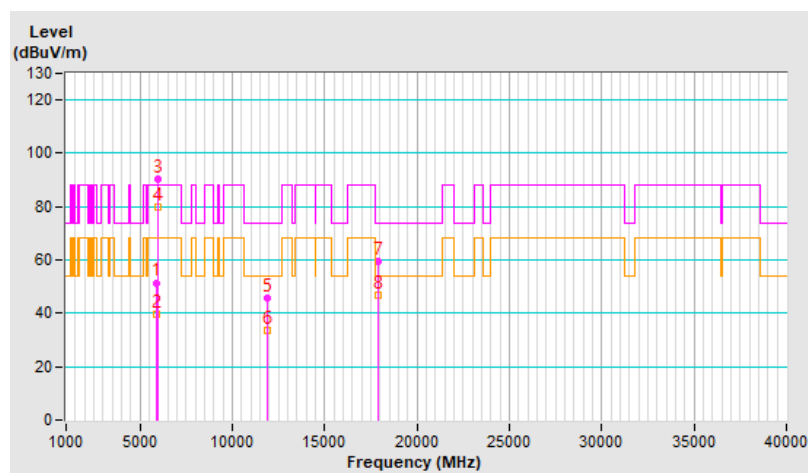


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	91.0 PK			1.66 H	348	85.2	5.8
2	*6195.00	81.8 AV			1.66 H	348	76.0	5.8
3	12390.00	45.8 PK	74.0	-28.2	1.78 H	145	31.1	14.7
4	12390.00	33.1 AV	54.0	-20.9	1.78 H	145	18.4	14.7
5	18585.00	58.2 PK	74.0	-15.8	1.78 H	18	63.7	-5.5
6	18585.00	45.4 AV	54.0	-8.6	1.78 H	18	50.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

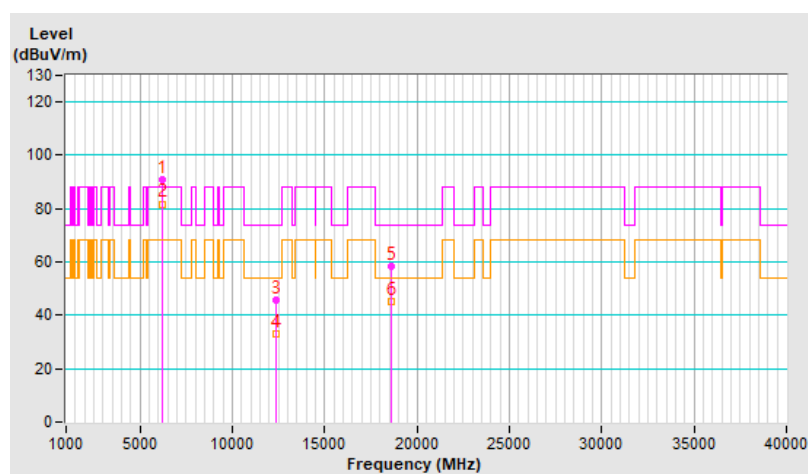


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	90.8 PK			1.69 V	324	85.0	5.8
2	*6195.00	80.1 AV			1.69 V	324	74.3	5.8
3	12390.00	45.3 PK	74.0	-28.7	1.59 V	106	30.6	14.7
4	12390.00	33.2 AV	54.0	-20.8	1.59 V	106	18.5	14.7
5	18585.00	59.8 PK	74.0	-14.2	1.78 V	52	65.3	-5.5
6	18585.00	47.2 AV	54.0	-6.8	1.78 V	52	52.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

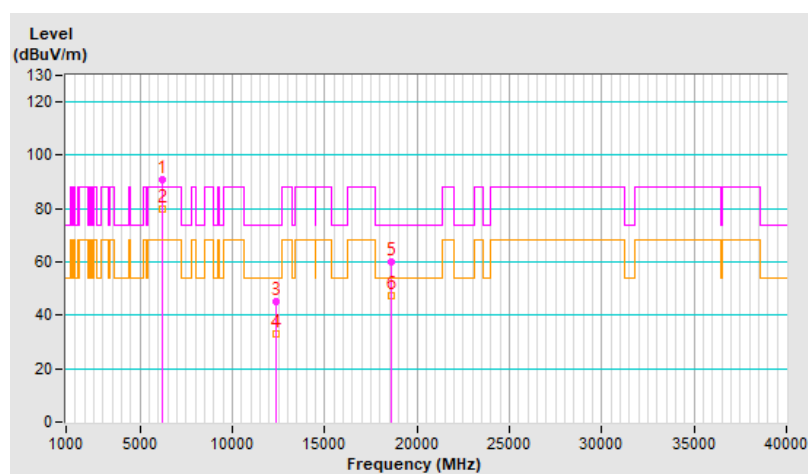


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.0 PK			1.68 H	344	84.2	6.8
2	*6415.00	81.5 AV			1.68 H	344	74.7	6.8
3	#12830.00	45.4 PK	88.2	-42.8	1.85 H	152	30.3	15.1
4	#12830.00	33.1 AV	68.2	-35.1	1.85 H	152	18.0	15.1
5	19245.00	58.7 PK	74.0	-15.3	1.77 H	5	63.3	-4.6
6	19245.00	45.8 AV	54.0	-8.2	1.77 H	5	50.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

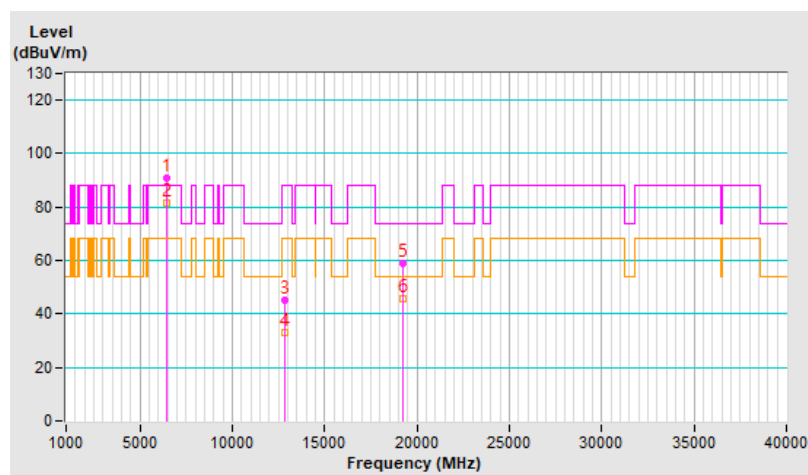


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	90.0 PK			1.62 V	343	83.2	6.8
2	*6415.00	79.3 AV			1.62 V	343	72.5	6.8
3	#12830.00	45.4 PK	88.2	-42.8	1.62 V	104	30.3	15.1
4	#12830.00	33.1 AV	68.2	-35.1	1.62 V	104	18.0	15.1
5	19245.00	59.7 PK	74.0	-14.3	1.80 V	43	64.3	-4.6
6	19245.00	46.6 AV	54.0	-7.4	1.80 V	43	51.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

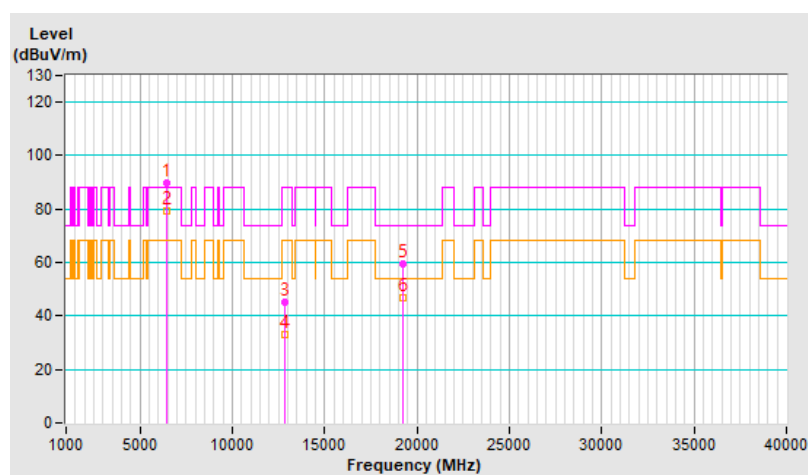


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	90.2 PK			1.64 H	347	82.8	7.4
2	*6535.00	81.0 AV			1.64 H	347	73.6	7.4
3	#13070.00	46.1 PK	88.2	-42.1	1.80 H	136	31.0	15.1
4	#13070.00	33.3 AV	68.2	-34.9	1.80 H	136	18.2	15.1
5	19605.00	58.9 PK	74.0	-15.1	1.79 H	23	63.7	-4.8
6	19605.00	46.0 AV	54.0	-8.0	1.79 H	23	50.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

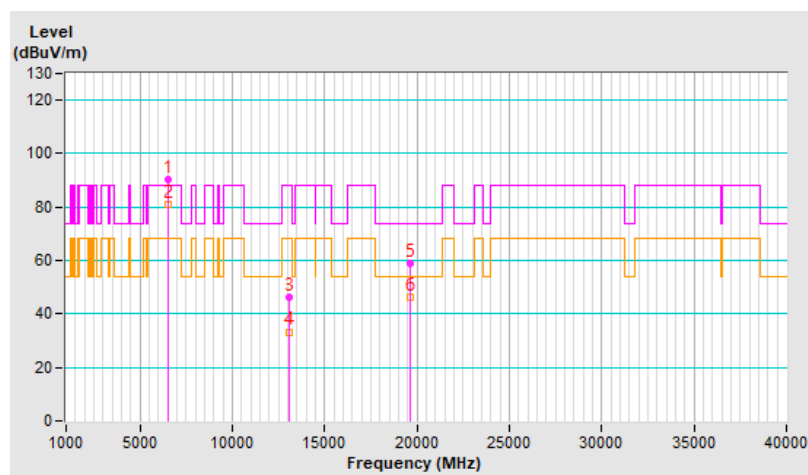


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	90.6 PK			1.72 V	340	83.2	7.4
2	*6535.00	80.0 AV			1.72 V	340	72.6	7.4
3	#13070.00	45.4 PK	88.2	-42.8	1.65 V	109	30.3	15.1
4	#13070.00	33.4 AV	68.2	-34.8	1.65 V	109	18.3	15.1
5	19605.00	59.2 PK	74.0	-14.8	1.75 V	53	64.0	-4.8
6	19605.00	46.6 AV	54.0	-7.4	1.75 V	53	51.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

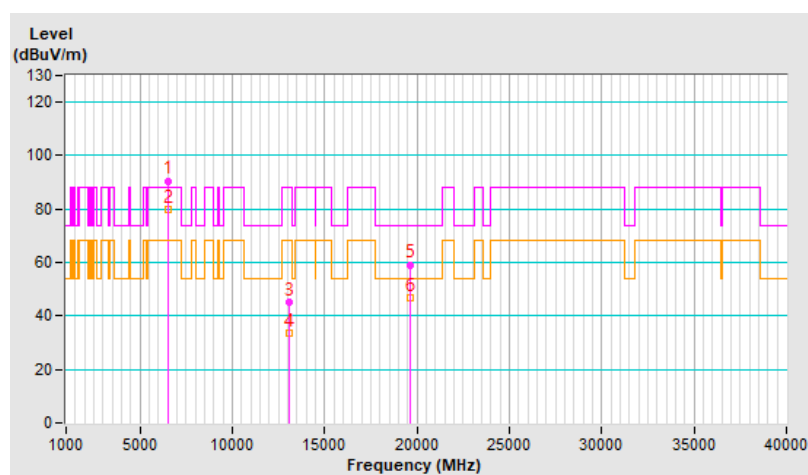


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	91.4 PK			1.71 H	335	83.7	7.7
2	*6695.00	81.8 AV			1.71 H	335	74.1	7.7
3	13390.00	46.2 PK	74.0	-27.8	1.81 H	126	30.8	15.4
4	13390.00	33.6 AV	54.0	-20.4	1.81 H	126	18.2	15.4
5	20085.00	58.8 PK	74.0	-15.2	1.79 H	27	63.1	-4.3
6	20085.00	45.8 AV	54.0	-8.2	1.79 H	27	50.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

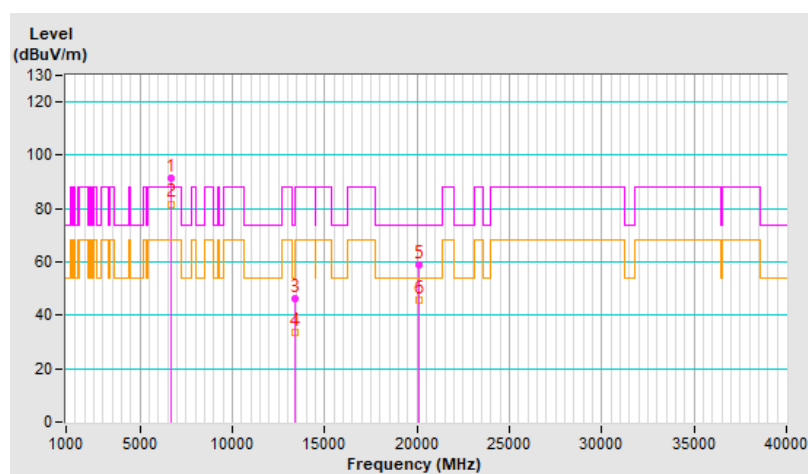


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	90.2 PK			1.70 V	319	82.5	7.7
2	*6695.00	79.6 AV			1.70 V	319	71.9	7.7
3	13390.00	45.8 PK	74.0	-28.2	1.61 V	101	30.4	15.4
4	13390.00	33.7 AV	54.0	-20.3	1.61 V	101	18.3	15.4
5	20085.00	60.0 PK	74.0	-14.0	1.80 V	28	64.3	-4.3
6	20085.00	47.1 AV	54.0	-6.9	1.80 V	28	51.4	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

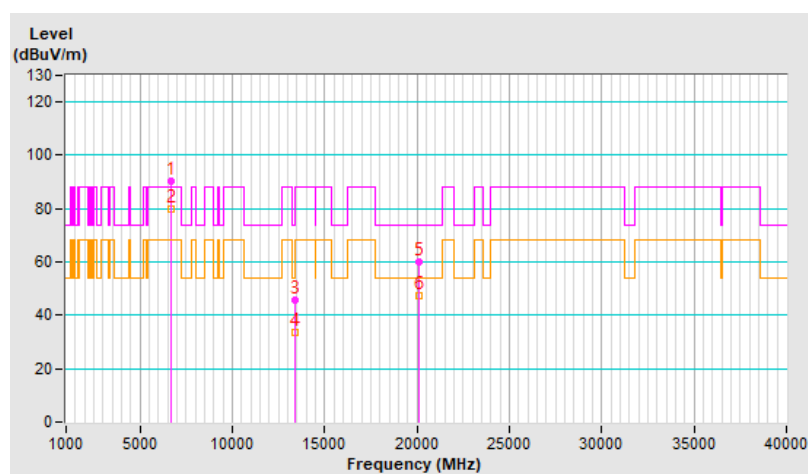


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.9 PK			1.78 H	225	85.7	8.2
2	*6855.00	82.9 AV			1.78 H	225	74.7	8.2
3	#13710.00	45.8 PK	88.2	-42.4	1.78 H	135	29.5	16.3
4	#13710.00	33.4 AV	68.2	-34.8	1.78 H	135	17.1	16.3
5	20565.00	58.9 PK	74.0	-15.1	1.85 H	18	62.6	-3.7
6	20565.00	45.9 AV	54.0	-8.1	1.85 H	18	49.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

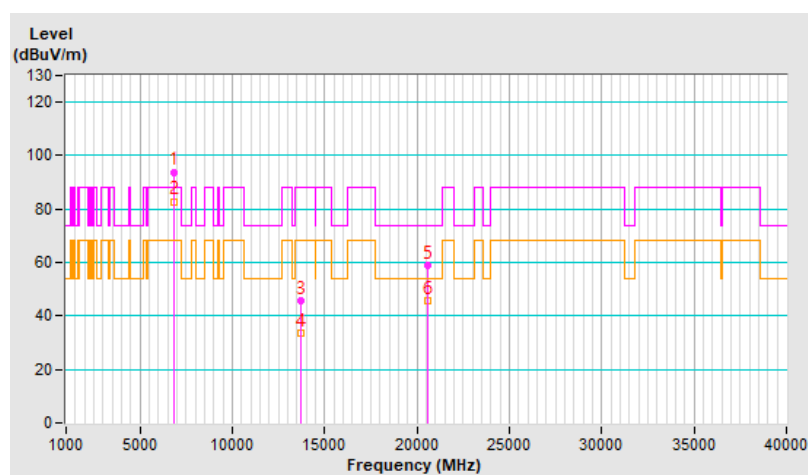


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	89.3 PK			1.83 V	148	81.1	8.2
2	*6855.00	79.0 AV			1.83 V	148	70.8	8.2
3	#13710.00	46.0 PK	88.2	-42.2	1.61 V	125	29.7	16.3
4	#13710.00	33.6 AV	68.2	-34.6	1.61 V	125	17.3	16.3
5	20565.00	59.9 PK	74.0	-14.1	1.71 V	29	63.6	-3.7
6	20565.00	47.0 AV	54.0	-7.0	1.71 V	29	50.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

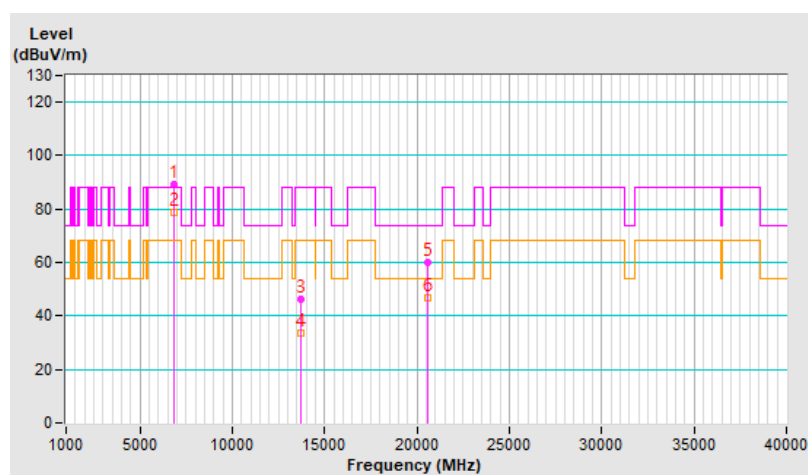


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	1.08 H	336	47.2	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.08 H	336	33.8	5.6
3	*5955.00	92.8 PK			1.08 H	336	87.3	5.5
4	*5955.00	82.2 AV			1.08 H	336	76.7	5.5
5	11910.00	46.4 PK	74.0	-27.6	1.86 H	155	31.8	14.6
6	11910.00	33.8 AV	54.0	-20.2	1.86 H	155	19.2	14.6
7	17865.00	58.9 PK	74.0	-15.1	1.84 H	5	33.0	25.9
8	17865.00	45.9 AV	54.0	-8.1	1.84 H	5	20.0	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

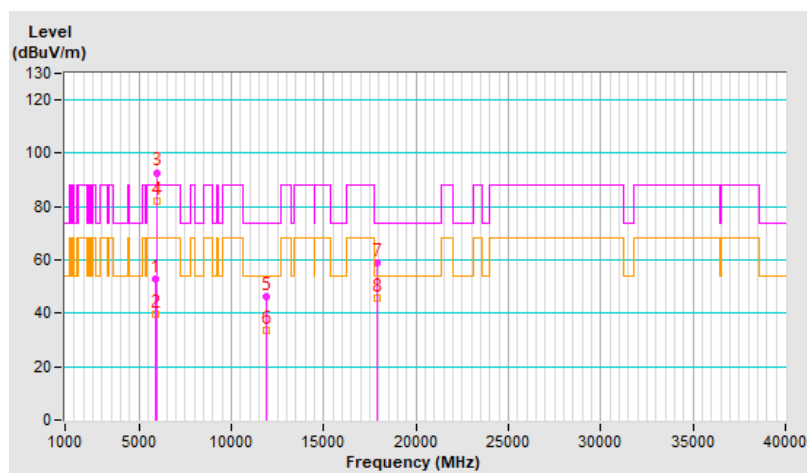


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.0 PK	88.2	-37.2	1.50 V	336	45.4	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.50 V	336	33.8	5.6
3	*5955.00	89.7 PK			1.50 V	336	84.2	5.5
4	*5955.00	79.8 AV			1.50 V	336	74.3	5.5
5	11910.00	45.8 PK	74.0	-28.2	1.69 V	105	31.2	14.6
6	11910.00	33.5 AV	54.0	-20.5	1.69 V	105	18.9	14.6
7	17865.00	59.7 PK	74.0	-14.3	1.73 V	36	33.8	25.9
8	17865.00	47.0 AV	54.0	-7.0	1.73 V	36	21.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

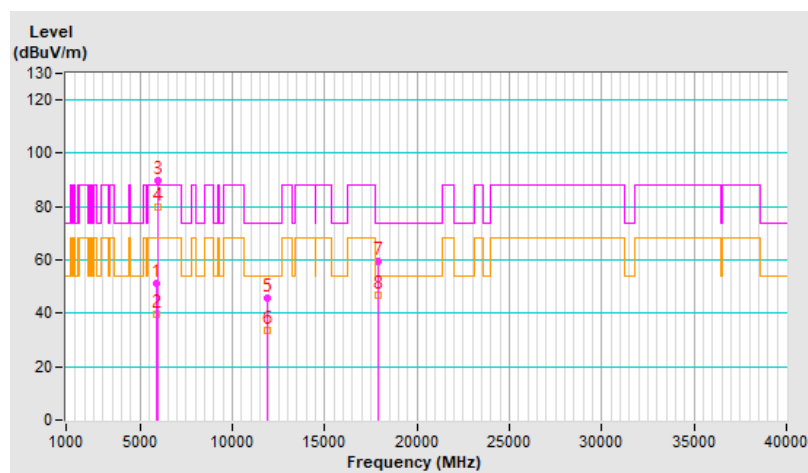


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	92.6 PK			1.11 H	346	86.8	5.8
2	*6195.00	81.9 AV			1.11 H	346	76.1	5.8
3	12390.00	46.1 PK	74.0	-27.9	1.78 H	151	31.4	14.7
4	12390.00	33.7 AV	54.0	-20.3	1.78 H	151	19.0	14.7
5	18585.00	58.9 PK	74.0	-15.1	1.74 H	0	64.4	-5.5
6	18585.00	45.9 AV	54.0	-8.1	1.74 H	0	51.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

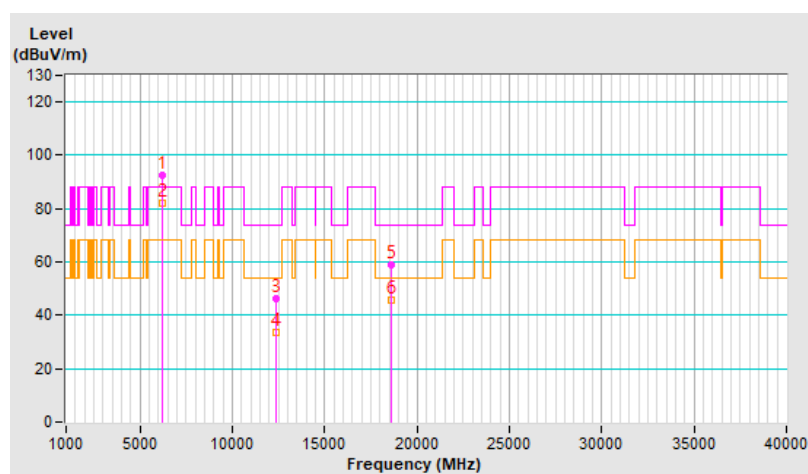


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	89.8 PK			1.48 V	351	84.0	5.8
2	*6195.00	80.0 AV			1.48 V	351	74.2	5.8
3	12390.00	46.1 PK	74.0	-27.9	1.65 V	110	31.4	14.7
4	12390.00	33.7 AV	54.0	-20.3	1.65 V	110	19.0	14.7
5	18585.00	59.8 PK	74.0	-14.2	1.73 V	44	65.3	-5.5
6	18585.00	46.8 AV	54.0	-7.2	1.73 V	44	52.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

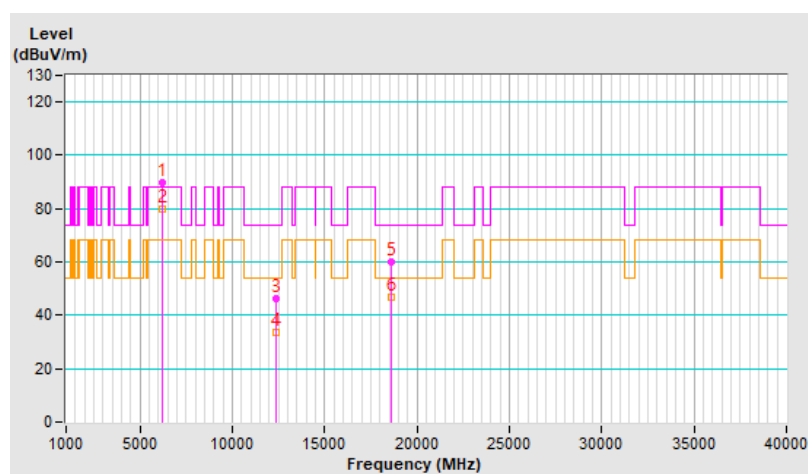


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.4 PK			1.04 H	350	85.6	6.8
2	*6415.00	82.0 AV			1.04 H	350	75.2	6.8
3	#12830.00	46.4 PK	88.2	-41.8	1.78 H	152	31.3	15.1
4	#12830.00	34.0 AV	68.2	-34.2	1.78 H	152	18.9	15.1
5	19245.00	58.6 PK	74.0	-15.4	1.84 H	24	63.2	-4.6
6	19245.00	45.5 AV	54.0	-8.5	1.84 H	24	50.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

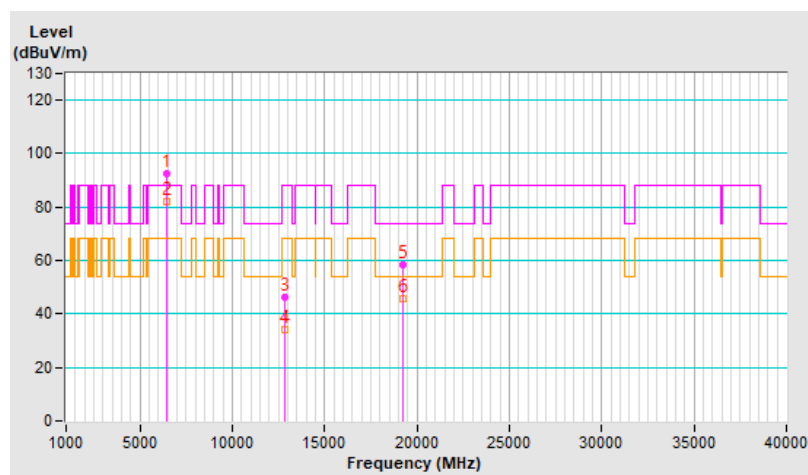


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	89.6 PK			1.45 V	340	82.8	6.8
2	*6415.00	79.8 AV			1.45 V	340	73.0	6.8
3	#12830.00	45.6 PK	88.2	-42.6	1.58 V	103	30.5	15.1
4	#12830.00	33.5 AV	68.2	-34.7	1.58 V	103	18.4	15.1
5	19245.00	59.8 PK	74.0	-14.2	1.73 V	54	64.4	-4.6
6	19245.00	47.0 AV	54.0	-7.0	1.73 V	54	51.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

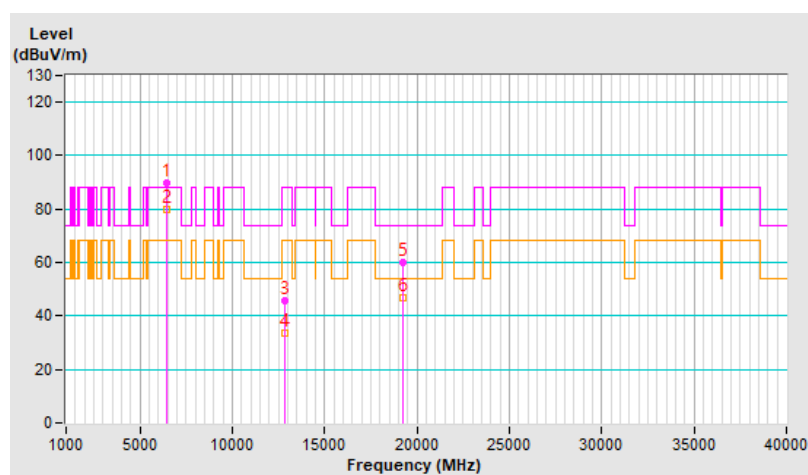


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.2 PK			1.05 H	329	85.8	7.4
2	*6535.00	82.5 AV			1.05 H	329	75.1	7.4
3	#13070.00	45.7 PK	88.2	-42.5	1.87 H	149	30.6	15.1
4	#13070.00	33.3 AV	68.2	-34.9	1.87 H	149	18.2	15.1
5	19605.00	58.9 PK	74.0	-15.1	1.76 H	22	63.7	-4.8
6	19605.00	45.8 AV	54.0	-8.2	1.76 H	22	50.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

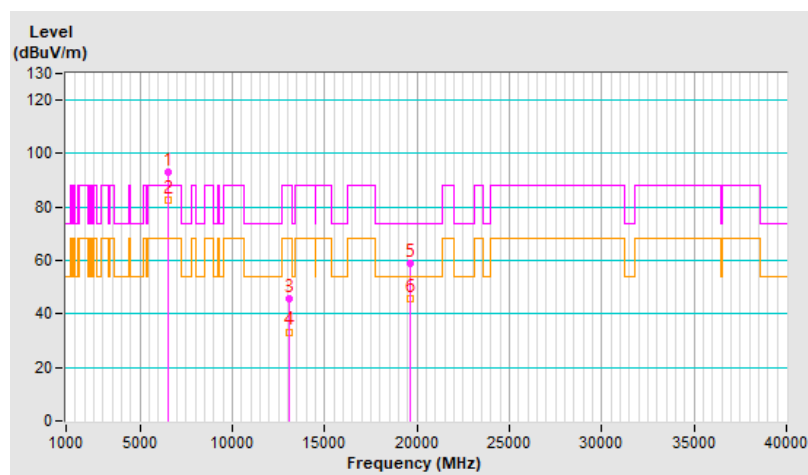


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	90.3 PK			1.50 V	341	82.9	7.4
2	*6535.00	80.3 AV			1.50 V	341	72.9	7.4
3	#13070.00	45.8 PK	88.2	-42.4	1.67 V	116	30.7	15.1
4	#13070.00	33.7 AV	68.2	-34.5	1.67 V	116	18.6	15.1
5	19605.00	60.1 PK	74.0	-13.9	1.80 V	41	64.9	-4.8
6	19605.00	47.5 AV	54.0	-6.5	1.80 V	41	52.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

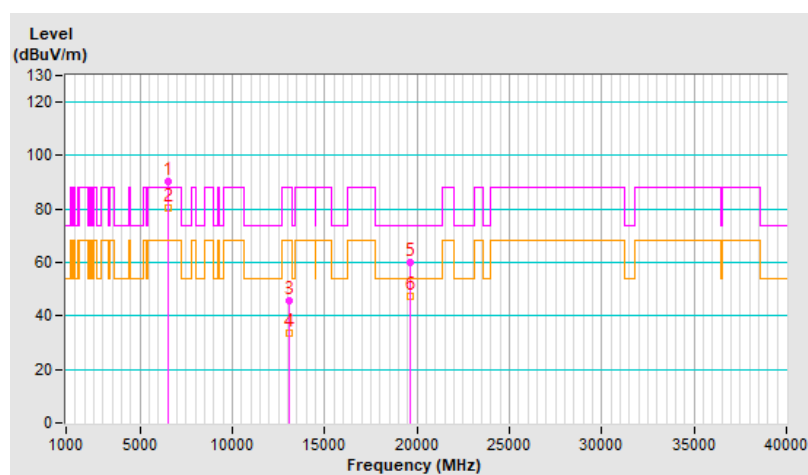


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.7 PK			1.11 H	346	85.0	7.7
2	*6695.00	81.9 AV			1.11 H	346	74.2	7.7
3	13390.00	45.7 PK	74.0	-28.3	1.79 H	147	30.3	15.4
4	13390.00	33.1 AV	54.0	-20.9	1.79 H	147	17.7	15.4
5	20085.00	58.1 PK	74.0	-15.9	1.73 H	26	62.4	-4.3
6	20085.00	45.2 AV	54.0	-8.8	1.73 H	26	49.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

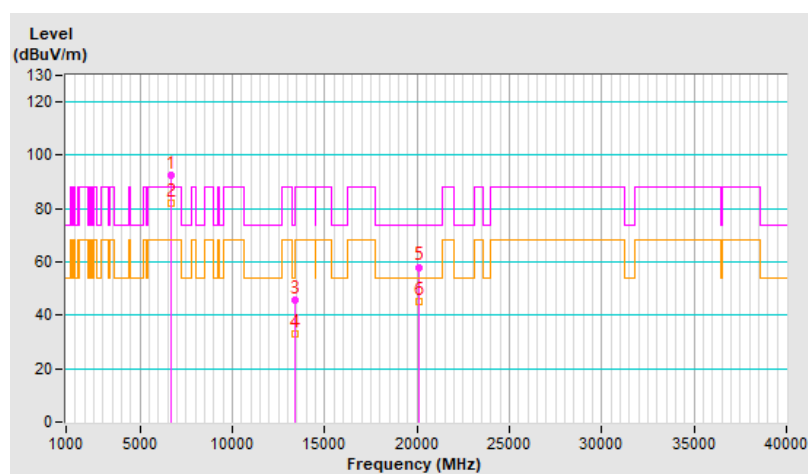


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	89.9 PK			1.50 V	335	82.2	7.7
2	*6695.00	79.8 AV			1.50 V	335	72.1	7.7
3	13390.00	45.6 PK	74.0	-28.4	1.66 V	97	30.2	15.4
4	13390.00	33.6 AV	54.0	-20.4	1.66 V	97	18.2	15.4
5	20085.00	60.2 PK	74.0	-13.8	1.80 V	31	64.5	-4.3
6	20085.00	47.2 AV	54.0	-6.8	1.80 V	31	51.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

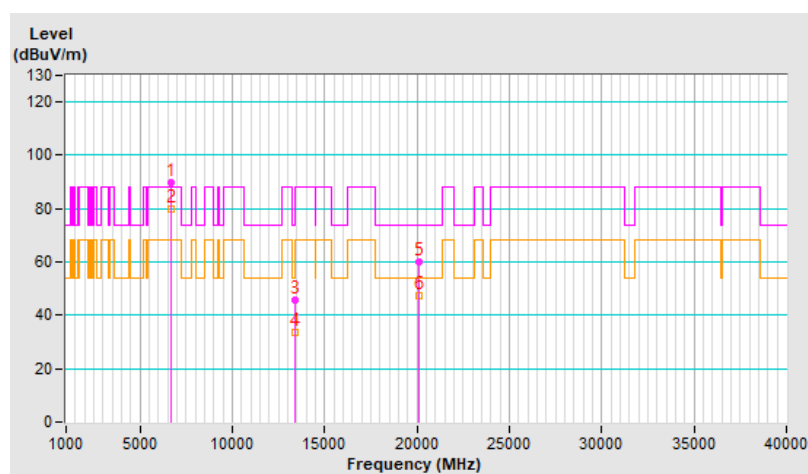


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.7 PK			1.80 H	220	86.5	8.2
2	*6855.00	83.6 AV			1.80 H	220	75.4	8.2
3	#13710.00	45.6 PK	88.2	-42.6	1.83 H	152	29.3	16.3
4	#13710.00	33.3 AV	68.2	-34.9	1.83 H	152	17.0	16.3
5	20565.00	58.6 PK	74.0	-15.4	1.79 H	21	62.3	-3.7
6	20565.00	45.5 AV	54.0	-8.5	1.79 H	21	49.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

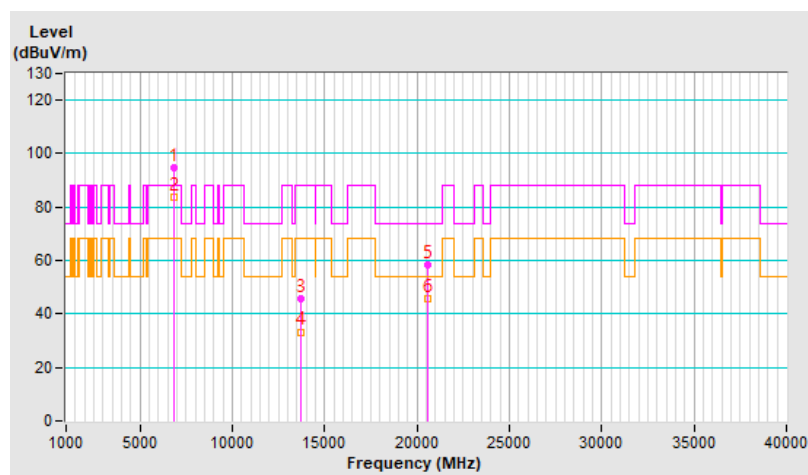


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	89.3 PK			1.14 V	146	81.1	8.2
2	*6855.00	78.8 AV			1.14 V	146	70.6	8.2
3	#13710.00	45.5 PK	88.2	-42.7	1.61 V	102	29.2	16.3
4	#13710.00	33.1 AV	68.2	-35.1	1.61 V	102	16.8	16.3
5	20565.00	59.3 PK	74.0	-14.7	1.74 V	37	63.0	-3.7
6	20565.00	46.5 AV	54.0	-7.5	1.74 V	37	50.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

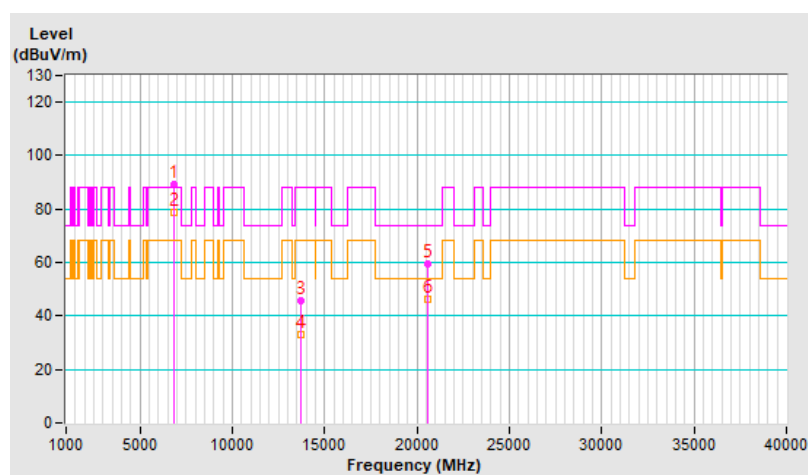


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.59 H	332	46.1	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.59 H	332	33.9	5.6
3	*5955.00	93.5 PK			1.59 H	332	88.0	5.5
4	*5955.00	83.2 AV			1.59 H	332	77.7	5.5
5	11910.00	46.6 PK	74.0	-27.4	1.83 H	137	32.0	14.6
6	11910.00	34.0 AV	54.0	-20.0	1.83 H	137	19.4	14.6
7	17865.00	58.6 PK	74.0	-15.4	1.80 H	24	32.7	25.9
8	17865.00	45.8 AV	54.0	-8.2	1.80 H	24	19.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

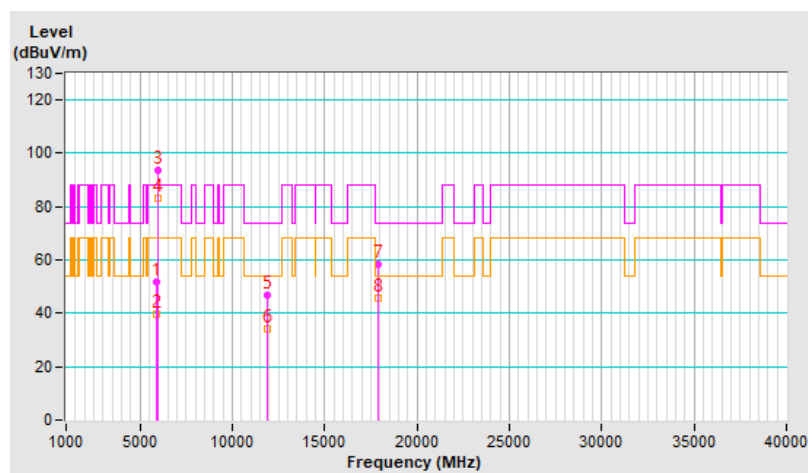


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.77 V	328	46.1	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.77 V	328	33.8	5.6
3	*5955.00	95.8 PK			1.77 V	328	90.3	5.5
4	*5955.00	82.5 AV			1.77 V	328	77.0	5.5
5	11910.00	45.6 PK	74.0	-28.4	1.67 V	120	31.0	14.6
6	11910.00	33.2 AV	54.0	-20.8	1.67 V	120	18.6	14.6
7	17865.00	59.3 PK	74.0	-14.7	1.74 V	44	33.4	25.9
8	17865.00	46.7 AV	54.0	-7.3	1.74 V	44	20.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

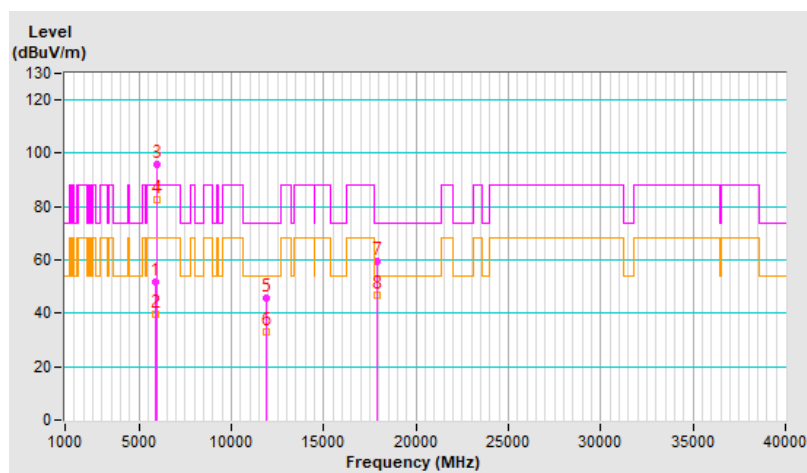


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	93.0 PK			1.61 H	337	87.2	5.8
2	*6195.00	82.8 AV			1.61 H	337	77.0	5.8
3	12390.00	46.4 PK	74.0	-27.6	1.85 H	153	31.7	14.7
4	12390.00	33.8 AV	54.0	-20.2	1.85 H	153	19.1	14.7
5	18585.00	58.1 PK	74.0	-15.9	1.77 H	3	63.6	-5.5
6	18585.00	45.4 AV	54.0	-8.6	1.77 H	3	50.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

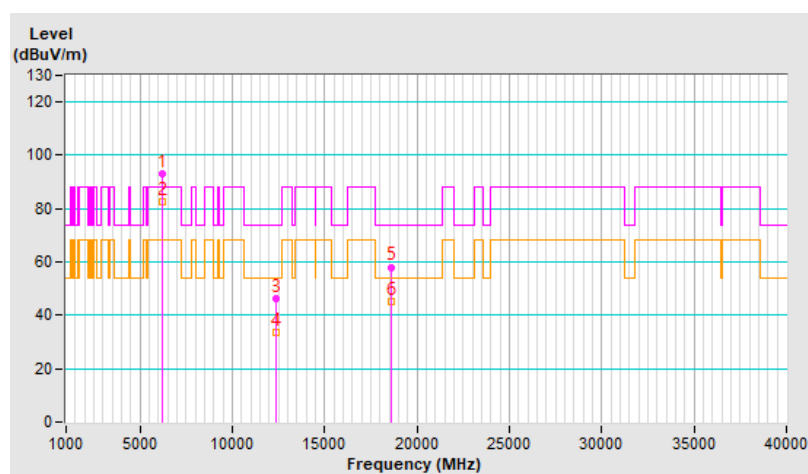


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	96.2 PK			1.76 V	318	90.4	5.8
2	*6195.00	82.6 AV			1.76 V	318	76.8	5.8
3	12390.00	45.9 PK	74.0	-28.1	1.66 V	115	31.2	14.7
4	12390.00	33.8 AV	54.0	-20.2	1.66 V	115	19.1	14.7
5	18585.00	60.0 PK	74.0	-14.0	1.74 V	40	65.5	-5.5
6	18585.00	47.4 AV	54.0	-6.6	1.74 V	40	52.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

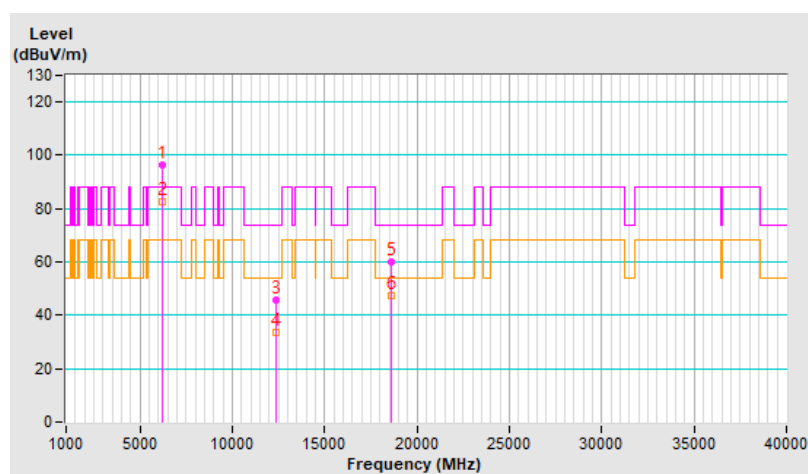


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.3 PK			1.54 H	347	86.5	6.8
2	*6415.00	82.9 AV			1.54 H	347	76.1	6.8
3	#12830.00	46.0 PK	88.2	-42.2	1.88 H	153	30.9	15.1
4	#12830.00	33.2 AV	68.2	-35.0	1.88 H	153	18.1	15.1
5	19245.00	58.7 PK	74.0	-15.3	1.84 H	21	63.3	-4.6
6	19245.00	45.8 AV	54.0	-8.2	1.84 H	21	50.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

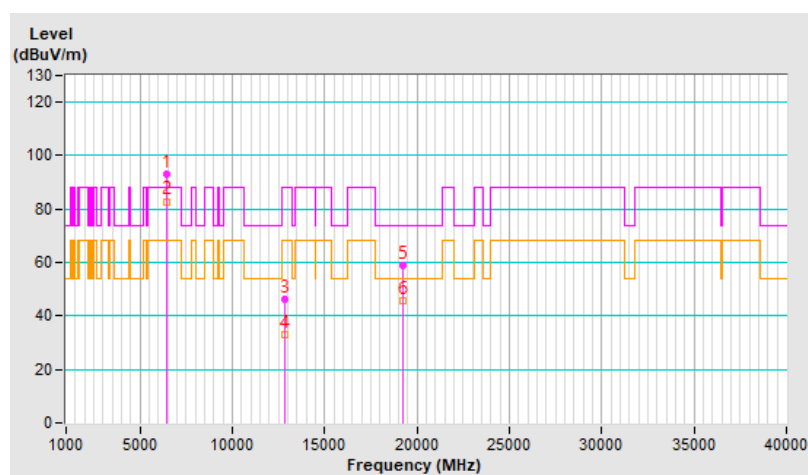


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.1 PK			1.78 V	320	89.3	6.8
2	*6415.00	82.5 AV			1.78 V	320	75.7	6.8
3	#12830.00	45.6 PK	88.2	-42.6	1.64 V	117	30.5	15.1
4	#12830.00	33.6 AV	68.2	-34.6	1.64 V	117	18.5	15.1
5	19245.00	60.5 PK	74.0	-13.5	1.71 V	27	65.1	-4.6
6	19245.00	47.4 AV	54.0	-6.6	1.71 V	27	52.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

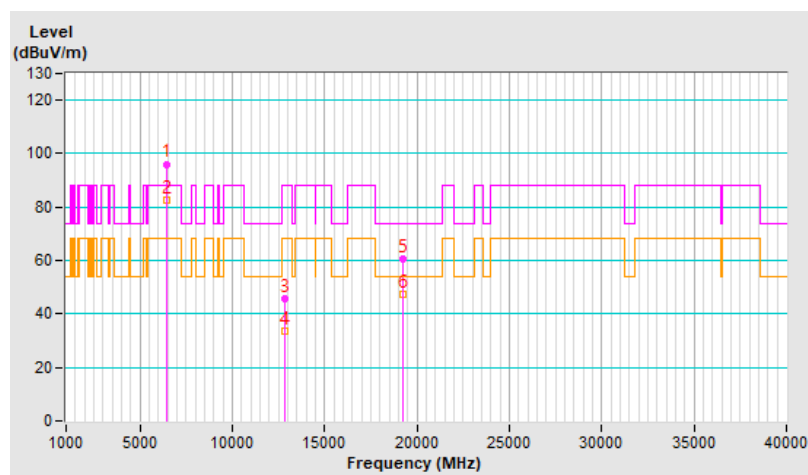


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.0 PK			1.64 H	324	86.6	7.4
2	*6535.00	83.7 AV			1.64 H	324	76.3	7.4
3	#13070.00	46.5 PK	88.2	-41.7	1.84 H	145	31.4	15.1
4	#13070.00	33.8 AV	68.2	-34.4	1.84 H	145	18.7	15.1
5	19605.00	58.4 PK	74.0	-15.6	1.76 H	24	63.2	-4.8
6	19605.00	45.4 AV	54.0	-8.6	1.76 H	24	50.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

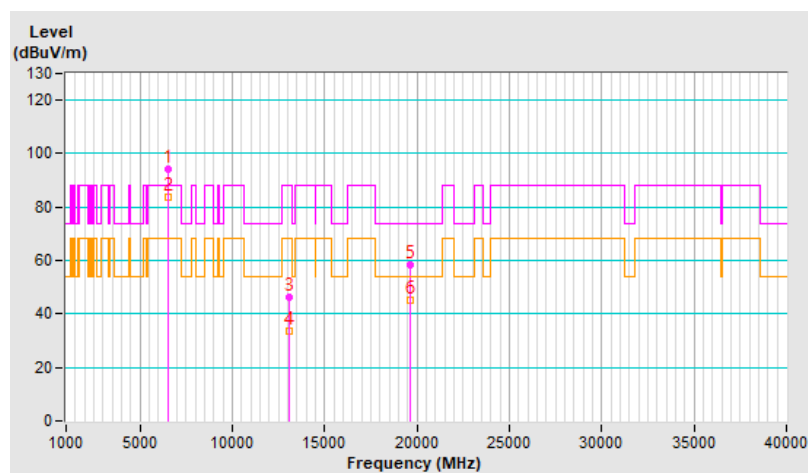


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.2 PK			1.73 V	317	88.8	7.4
2	*6535.00	82.7 AV			1.73 V	317	75.3	7.4
3	#13070.00	46.5 PK	88.2	-41.7	1.58 V	128	31.4	15.1
4	#13070.00	33.9 AV	68.2	-34.3	1.58 V	128	18.8	15.1
5	19605.00	60.0 PK	74.0	-14.0	1.74 V	27	64.8	-4.8
6	19605.00	46.9 AV	54.0	-7.1	1.74 V	27	51.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

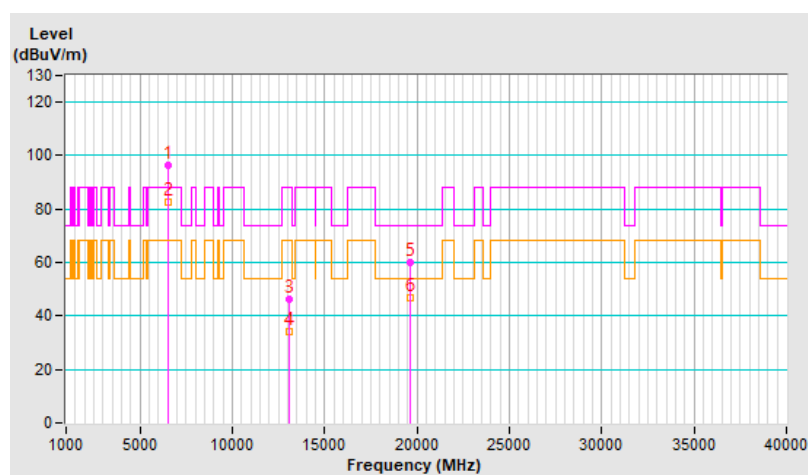


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	93.8 PK			1.54 H	321	86.1	7.7
2	*6695.00	83.5 AV			1.54 H	321	75.8	7.7
3	13390.00	45.9 PK	74.0	-28.1	1.82 H	145	30.5	15.4
4	13390.00	33.4 AV	54.0	-20.6	1.82 H	145	18.0	15.4
5	20085.00	58.8 PK	74.0	-15.2	1.74 H	16	63.1	-4.3
6	20085.00	45.8 AV	54.0	-8.2	1.74 H	16	50.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

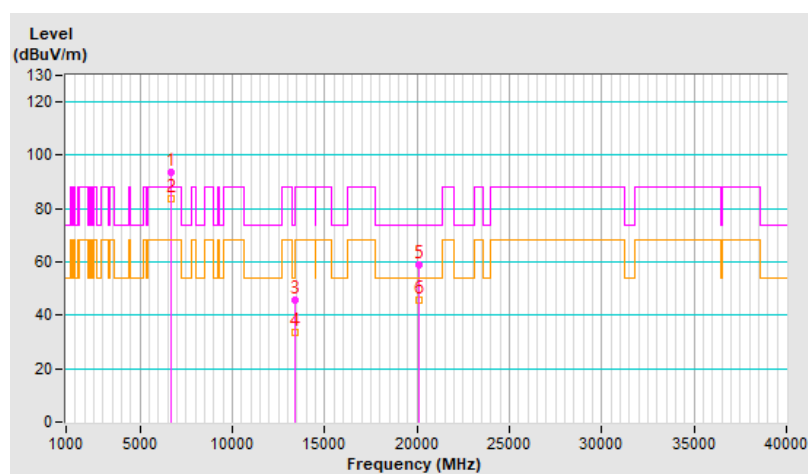


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.2 PK			1.83 V	321	87.5	7.7
2	*6695.00	82.1 AV			1.83 V	321	74.4	7.7
3	13390.00	45.9 PK	74.0	-28.1	1.57 V	109	30.5	15.4
4	13390.00	33.7 AV	54.0	-20.3	1.57 V	109	18.3	15.4
5	20085.00	59.4 PK	74.0	-14.6	1.74 V	33	63.7	-4.3
6	20085.00	46.9 AV	54.0	-7.1	1.74 V	33	51.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

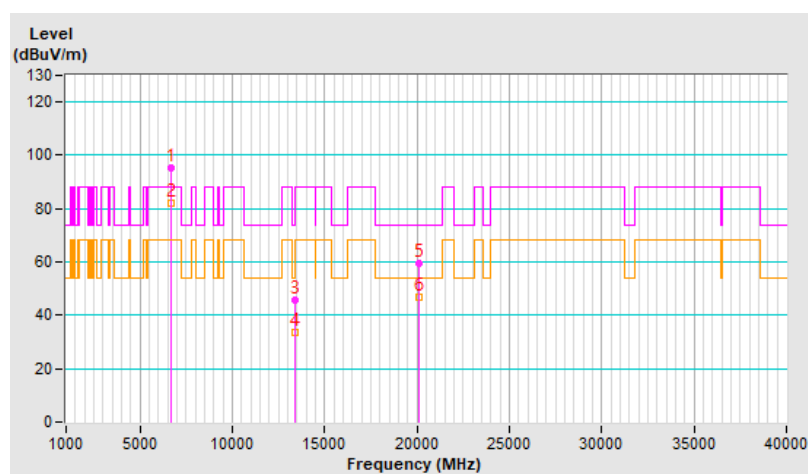


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.6 PK			1.80 H	221	85.4	8.2
2	*6855.00	83.1 AV			1.80 H	221	74.9	8.2
3	#13710.00	46.1 PK	88.2	-42.1	1.77 H	130	29.8	16.3
4	#13710.00	33.4 AV	68.2	-34.8	1.77 H	130	17.1	16.3
5	20565.00	58.3 PK	74.0	-15.7	1.85 H	29	62.0	-3.7
6	20565.00	45.1 AV	54.0	-8.9	1.85 H	29	48.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

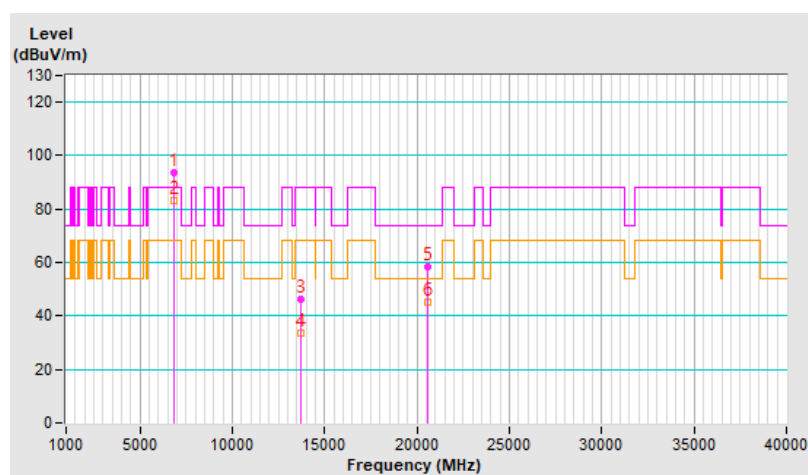


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	89.2 PK			1.61 V	167	81.0	8.2
2	*6855.00	78.9 AV			1.61 V	167	70.7	8.2
3	#13710.00	46.0 PK	88.2	-42.2	1.63 V	104	29.7	16.3
4	#13710.00	33.9 AV	68.2	-34.3	1.63 V	104	17.6	16.3
5	20565.00	59.2 PK	74.0	-14.8	1.71 V	19	62.9	-3.7
6	20565.00	46.5 AV	54.0	-7.5	1.71 V	19	50.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

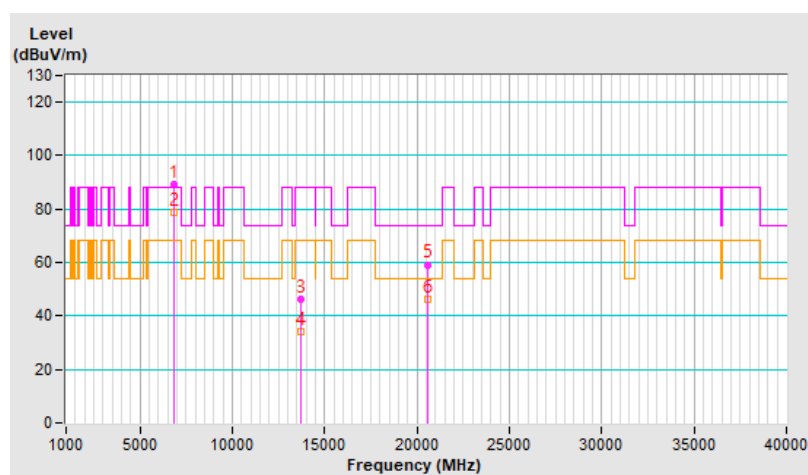


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.48 H	332	45.9	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.48 H	332	33.8	5.6
3	*5955.00	93.3 PK			1.48 H	332	87.8	5.5
4	*5955.00	82.5 AV			1.48 H	332	77.0	5.5
5	11910.00	46.1 PK	74.0	-27.9	1.79 H	150	31.5	14.6
6	11910.00	33.6 AV	54.0	-20.4	1.79 H	150	19.0	14.6
7	17865.00	58.0 PK	74.0	-16.0	1.79 H	24	32.1	25.9
8	17865.00	45.2 AV	54.0	-8.8	1.79 H	24	19.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

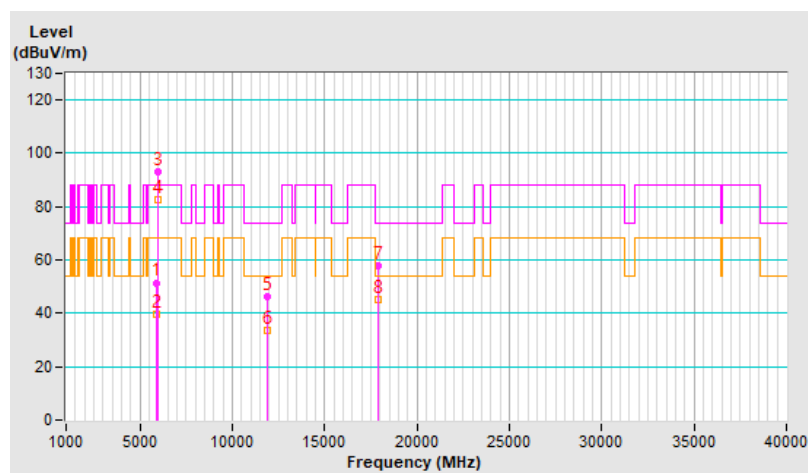


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.17 V	309	46.3	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.17 V	309	33.9	5.6
3	*5955.00	89.9 PK			1.17 V	309	84.4	5.5
4	*5955.00	81.2 AV			1.17 V	309	75.7	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.58 V	110	31.6	14.6
6	11910.00	33.9 AV	54.0	-20.1	1.58 V	110	19.3	14.6
7	17865.00	60.3 PK	74.0	-13.7	1.75 V	33	34.4	25.9
8	17865.00	47.5 AV	54.0	-6.5	1.75 V	33	21.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

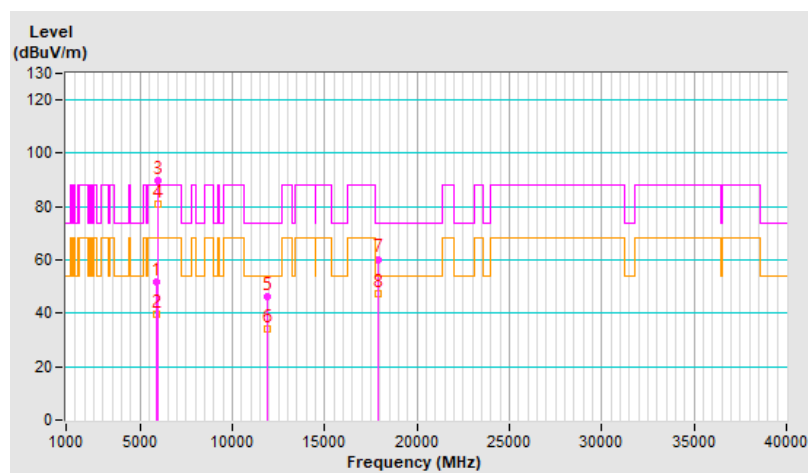


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.1 PK			1.53 H	325	86.3	6.8
2	*6415.00	82.0 AV			1.53 H	325	75.2	6.8
3	#12830.00	45.4 PK	88.2	-42.8	1.88 H	139	30.3	15.1
4	#12830.00	33.0 AV	68.2	-35.2	1.88 H	139	17.9	15.1
5	19245.00	59.0 PK	74.0	-15.0	1.77 H	3	63.6	-4.6
6	19245.00	45.8 AV	54.0	-8.2	1.77 H	3	50.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

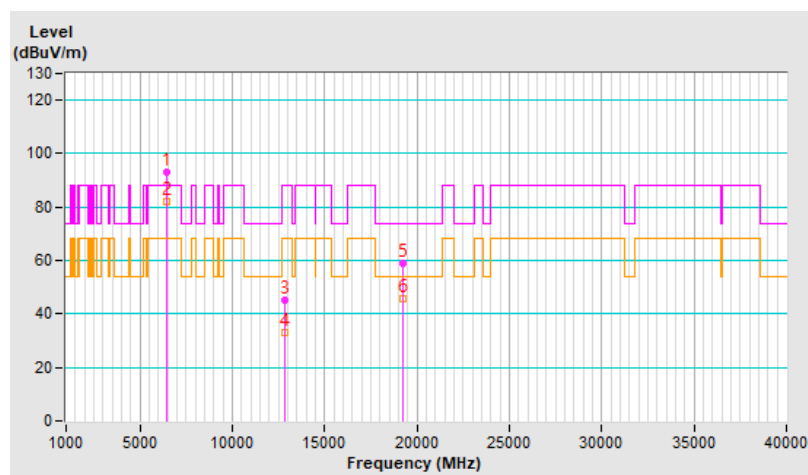


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.3 PK			1.72 V	342	88.5	6.8
2	*6415.00	82.3 AV			1.72 V	342	75.5	6.8
3	#12830.00	46.2 PK	88.2	-42.0	1.63 V	104	31.1	15.1
4	#12830.00	33.7 AV	68.2	-34.5	1.63 V	104	18.6	15.1
5	19245.00	59.9 PK	74.0	-14.1	1.73 V	43	64.5	-4.6
6	19245.00	47.0 AV	54.0	-7.0	1.73 V	43	51.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

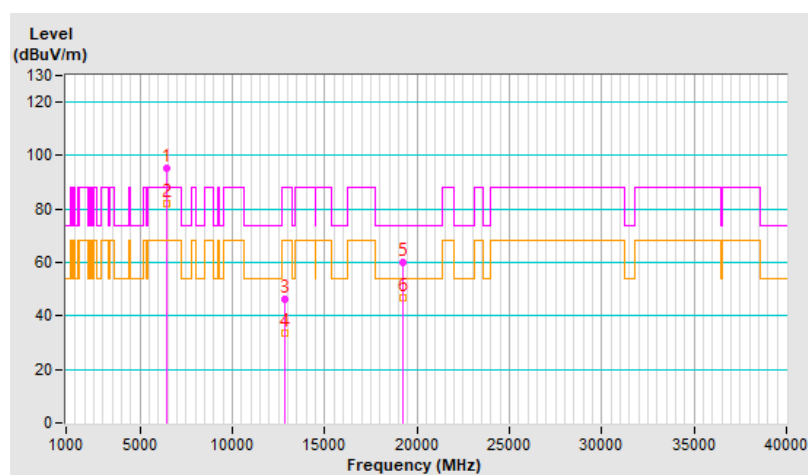


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.2 PK			1.52 H	332	85.8	7.4
2	*6535.00	82.3 AV			1.52 H	332	74.9	7.4
3	#13070.00	46.7 PK	88.2	-41.5	1.77 H	139	31.6	15.1
4	#13070.00	33.9 AV	68.2	-34.3	1.77 H	139	18.8	15.1
5	19605.00	58.6 PK	74.0	-15.4	1.79 H	31	63.4	-4.8
6	19605.00	45.5 AV	54.0	-8.5	1.79 H	31	50.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

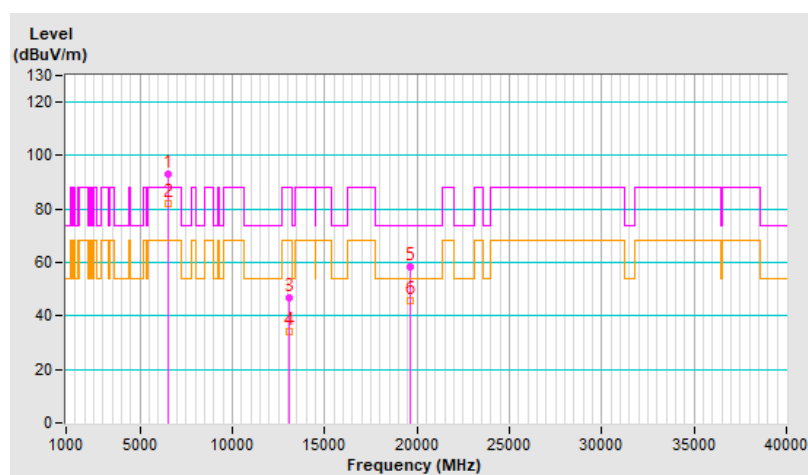


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.5 PK			1.80 V	320	88.1	7.4
2	*6535.00	82.4 AV			1.80 V	320	75.0	7.4
3	#13070.00	45.6 PK	88.2	-42.6	1.62 V	112	30.5	15.1
4	#13070.00	33.2 AV	68.2	-35.0	1.62 V	112	18.1	15.1
5	19605.00	59.9 PK	74.0	-14.1	1.73 V	52	64.7	-4.8
6	19605.00	46.9 AV	54.0	-7.1	1.73 V	52	51.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

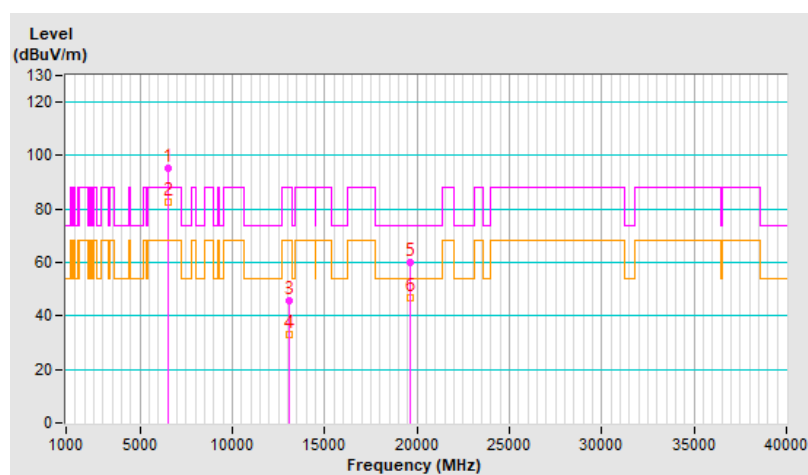


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	98.4 PK			1.96 H	274	90.2	8.2
2	*6855.00	86.7 AV			1.96 H	274	78.5	8.2
3	#13710.00	46.0 PK	88.2	-42.2	1.78 H	127	29.7	16.3
4	#13710.00	33.2 AV	68.2	-35.0	1.78 H	127	16.9	16.3
5	20565.00	58.4 PK	74.0	-15.6	1.85 H	28	62.1	-3.7
6	20565.00	45.6 AV	54.0	-8.4	1.85 H	28	49.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

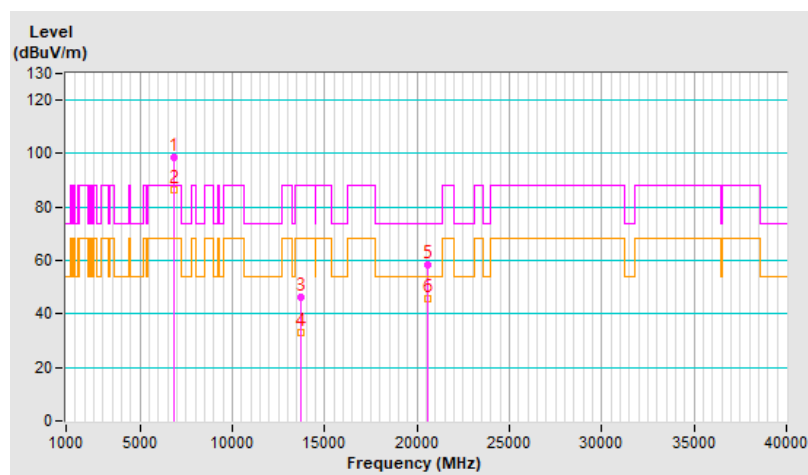


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.0 PK			1.72 V	148	82.8	8.2
2	*6855.00	79.9 AV			1.72 V	148	71.7	8.2
3	#13710.00	46.2 PK	88.2	-42.0	1.59 V	114	29.9	16.3
4	#13710.00	33.6 AV	68.2	-34.6	1.59 V	114	17.3	16.3
5	20565.00	60.2 PK	74.0	-13.8	1.77 V	53	63.9	-3.7
6	20565.00	47.1 AV	54.0	-6.9	1.77 V	53	50.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

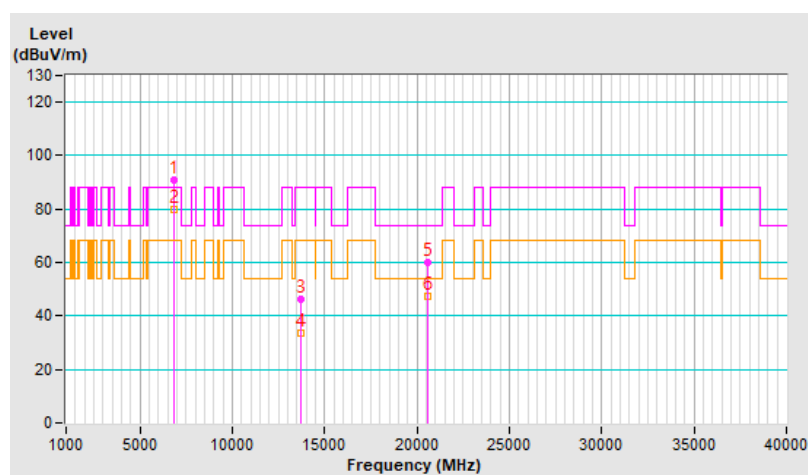


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	1.46 H	332	46.2	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.46 H	332	33.9	5.6
3	*5955.00	93.9 PK			1.46 H	332	88.4	5.5
4	*5955.00	83.4 AV			1.46 H	332	77.9	5.5
5	11910.00	46.4 PK	74.0	-27.6	1.77 H	138	31.8	14.6
6	11910.00	33.7 AV	54.0	-20.3	1.77 H	138	19.1	14.6
7	17865.00	58.4 PK	74.0	-15.6	1.74 H	11	32.5	25.9
8	17865.00	45.6 AV	54.0	-8.4	1.74 H	11	19.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

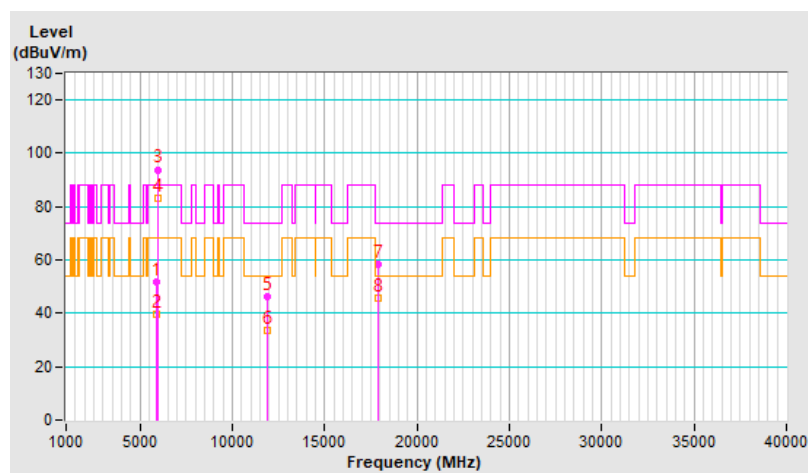


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.35 V	309	46.1	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.35 V	309	34.0	5.6
3	*5955.00	93.1 PK			1.35 V	309	87.6	5.5
4	*5955.00	82.2 AV			1.35 V	309	76.7	5.5
5	11910.00	46.4 PK	74.0	-27.6	1.63 V	122	31.8	14.6
6	11910.00	34.0 AV	54.0	-20.0	1.63 V	122	19.4	14.6
7	17865.00	59.6 PK	74.0	-14.4	1.72 V	32	33.7	25.9
8	17865.00	46.6 AV	54.0	-7.4	1.72 V	32	20.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

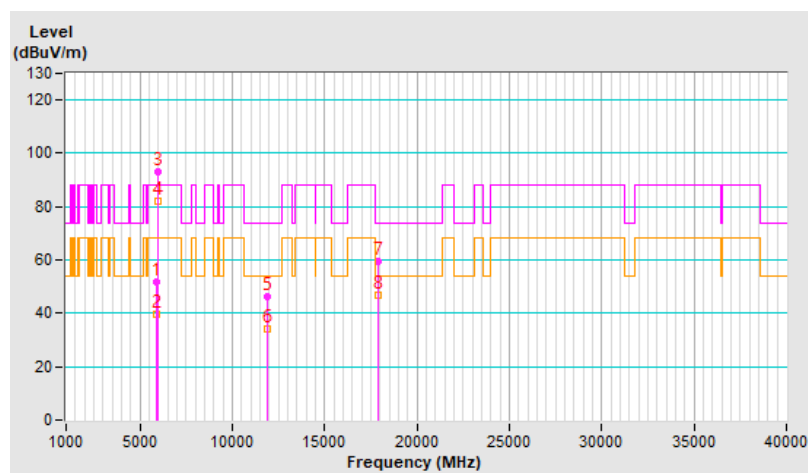


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.9 PK			1.50 H	323	87.1	6.8
2	*6415.00	83.1 AV			1.50 H	323	76.3	6.8
3	#12830.00	46.0 PK	88.2	-42.2	1.83 H	146	30.9	15.1
4	#12830.00	33.3 AV	68.2	-34.9	1.83 H	146	18.2	15.1
5	19245.00	58.0 PK	74.0	-16.0	1.78 H	6	62.6	-4.6
6	19245.00	45.1 AV	54.0	-8.9	1.78 H	6	49.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

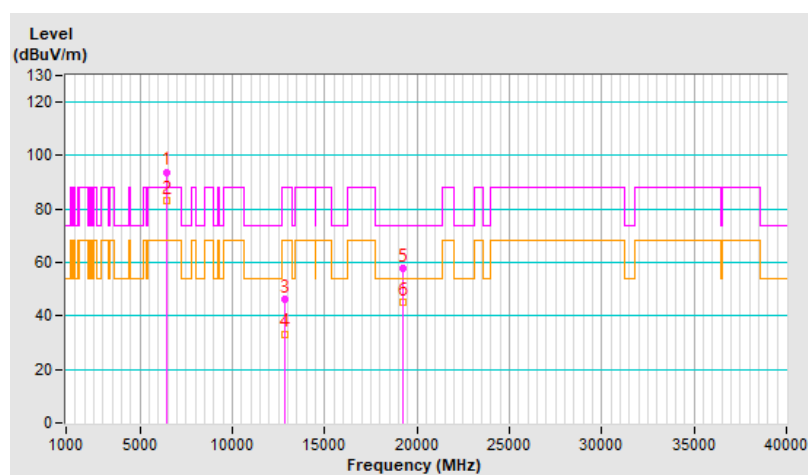


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.4 PK			1.36 V	299	86.6	6.8
2	*6415.00	82.7 AV			1.36 V	299	75.9	6.8
3	#12830.00	46.1 PK	88.2	-42.1	1.65 V	127	31.0	15.1
4	#12830.00	33.6 AV	68.2	-34.6	1.65 V	127	18.5	15.1
5	19245.00	60.3 PK	74.0	-13.7	1.77 V	44	64.9	-4.6
6	19245.00	47.5 AV	54.0	-6.5	1.77 V	44	52.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

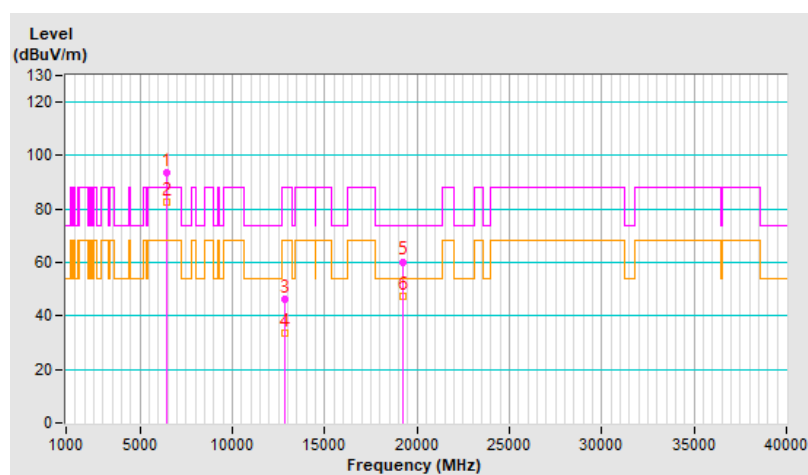


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.3 PK			1.46 H	325	85.9	7.4
2	*6535.00	83.0 AV			1.46 H	325	75.6	7.4
3	#13070.00	45.9 PK	88.2	-42.3	1.85 H	138	30.8	15.1
4	#13070.00	33.3 AV	68.2	-34.9	1.85 H	138	18.2	15.1
5	19605.00	58.5 PK	74.0	-15.5	1.85 H	1	63.3	-4.8
6	19605.00	45.7 AV	54.0	-8.3	1.85 H	1	50.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

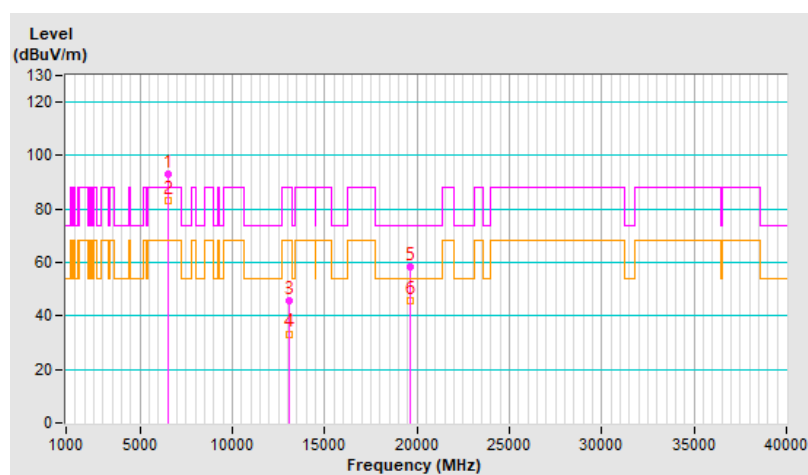


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.0 PK			1.33 V	309	85.6	7.4
2	*6535.00	82.1 AV			1.33 V	309	74.7	7.4
3	#13070.00	45.9 PK	88.2	-42.3	1.67 V	128	30.8	15.1
4	#13070.00	33.7 AV	68.2	-34.5	1.67 V	128	18.6	15.1
5	19605.00	59.5 PK	74.0	-14.5	1.76 V	33	64.3	-4.8
6	19605.00	46.6 AV	54.0	-7.4	1.76 V	33	51.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

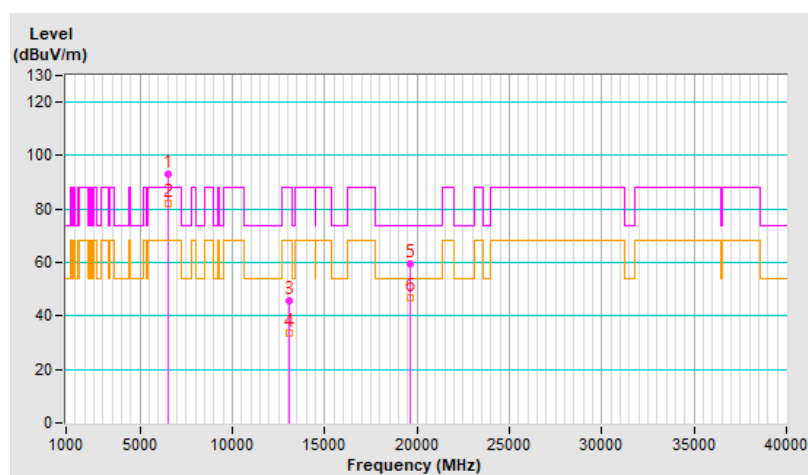


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.8 PK			1.77 H	222	86.6	8.2
2	*6855.00	83.5 AV			1.77 H	222	75.3	8.2
3	#13710.00	46.6 PK	88.2	-41.6	1.85 H	135	30.3	16.3
4	#13710.00	33.8 AV	68.2	-34.4	1.85 H	135	17.5	16.3
5	20565.00	58.4 PK	74.0	-15.6	1.80 H	19	62.1	-3.7
6	20565.00	45.5 AV	54.0	-8.5	1.80 H	19	49.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

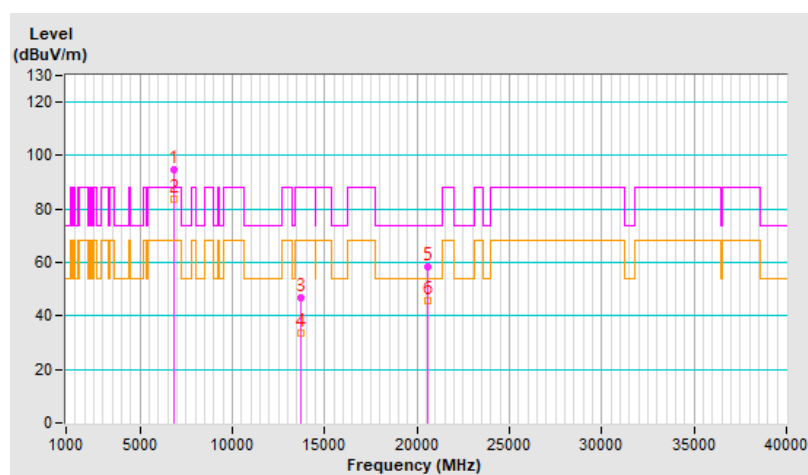


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	92.1 PK			1.71 V	148	83.9	8.2
2	*6855.00	79.4 AV			1.71 V	148	71.2	8.2
3	#13710.00	46.0 PK	88.2	-42.2	1.61 V	99	29.7	16.3
4	#13710.00	33.8 AV	68.2	-34.4	1.61 V	99	17.5	16.3
5	20565.00	59.8 PK	74.0	-14.2	1.80 V	30	63.5	-3.7
6	20565.00	47.1 AV	54.0	-6.9	1.80 V	30	50.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

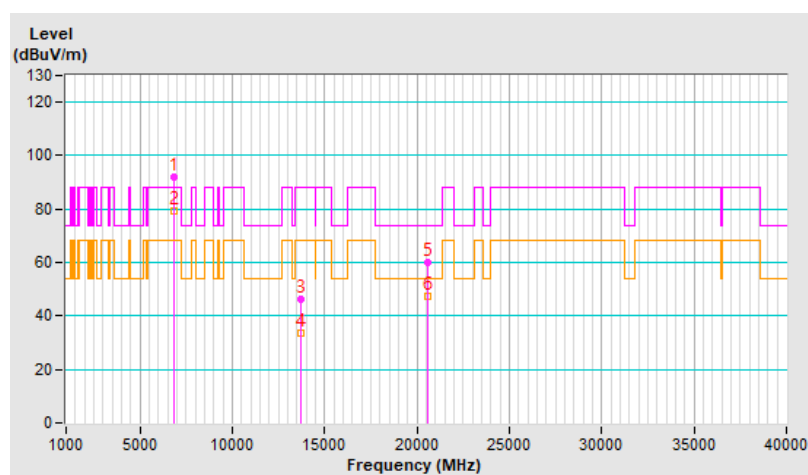


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.3 PK	88.2	-35.9	2.02 H	275	46.7	5.6
2	#5925.00	40.1 AV	68.2	-28.1	2.02 H	275	34.5	5.6
3	*5985.00	99.5 PK			2.02 H	275	94.0	5.5
4	*5985.00	88.1 AV			2.02 H	275	82.6	5.5
5	11970.00	46.4 PK	74.0	-27.6	1.79 H	132	31.9	14.5
6	11970.00	33.9 AV	54.0	-20.1	1.79 H	132	19.4	14.5
7	17955.00	58.2 PK	74.0	-15.8	1.75 H	26	29.9	28.3
8	17955.00	45.0 AV	54.0	-9.0	1.75 H	26	16.7	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

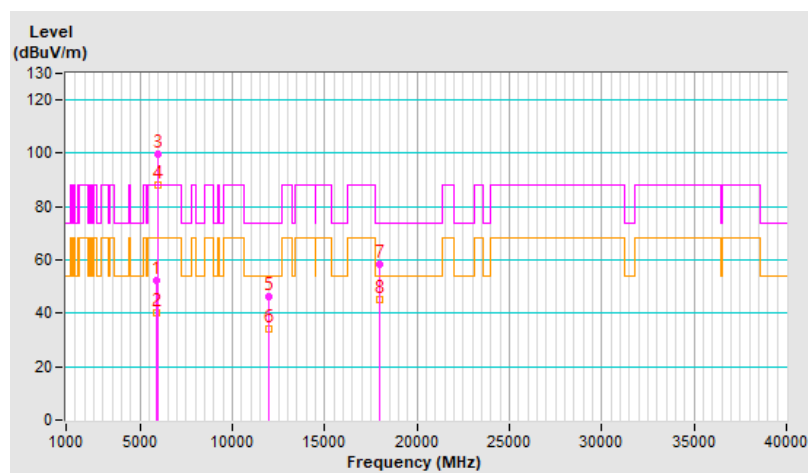


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.49 V	36	45.2	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.49 V	36	34.0	5.6
3	*5985.00	92.3 PK			1.49 V	36	86.8	5.5
4	*5985.00	81.8 AV			1.49 V	36	76.3	5.5
5	11970.00	46.2 PK	74.0	-27.8	1.60 V	109	31.7	14.5
6	11970.00	34.0 AV	54.0	-20.0	1.60 V	109	19.5	14.5
7	17955.00	59.6 PK	74.0	-14.4	1.80 V	36	31.3	28.3
8	17955.00	46.7 AV	54.0	-7.3	1.80 V	36	18.4	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

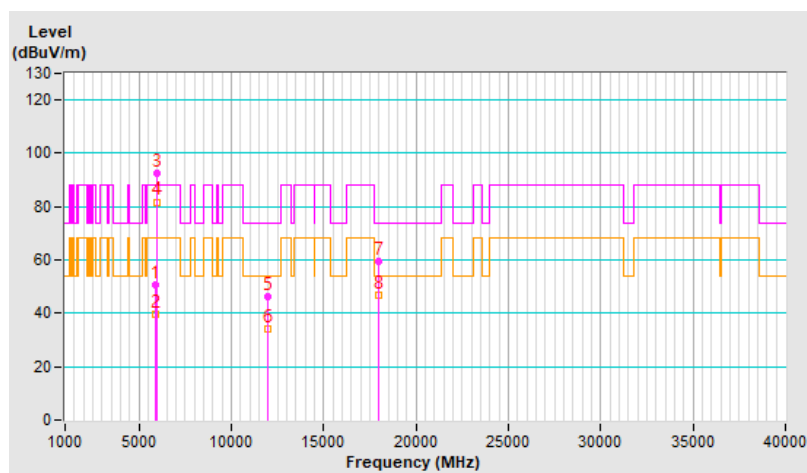


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	99.6 PK			2.00 H	286	93.0	6.6
2	*6385.00	88.3 AV			2.00 H	286	81.7	6.6
3	#12770.00	46.2 PK	88.2	-42.0	1.83 H	146	31.3	14.9
4	#12770.00	33.6 AV	68.2	-34.6	1.83 H	146	18.7	14.9
5	19155.00	58.7 PK	74.0	-15.3	1.78 H	27	63.4	-4.7
6	19155.00	45.5 AV	54.0	-8.5	1.78 H	27	50.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

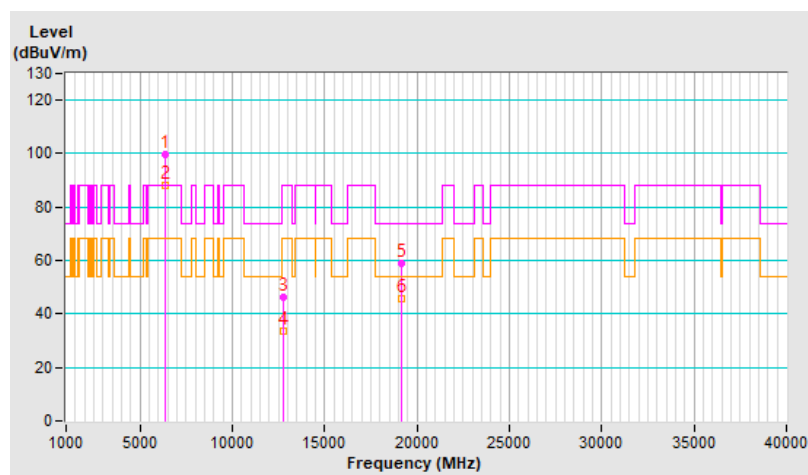


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	92.1 PK			1.49 V	25	85.5	6.6
2	*6385.00	81.6 AV			1.49 V	25	75.0	6.6
3	#12770.00	46.2 PK	88.2	-42.0	1.66 V	113	31.3	14.9
4	#12770.00	33.8 AV	68.2	-34.4	1.66 V	113	18.9	14.9
5	19155.00	59.6 PK	74.0	-14.4	1.81 V	26	64.3	-4.7
6	19155.00	46.9 AV	54.0	-7.1	1.81 V	26	51.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

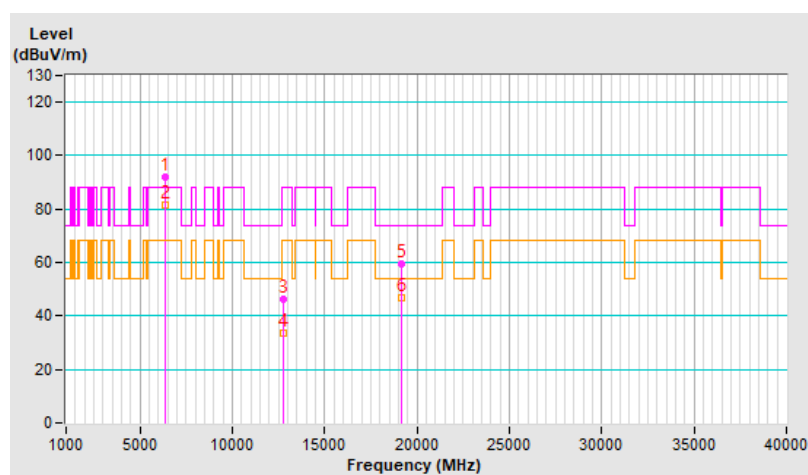


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	99.9 PK			1.98 H	267	92.1	7.8
2	*6625.00	88.3 AV			1.98 H	267	80.5	7.8
3	13250.00	46.1 PK	74.0	-27.9	1.89 H	127	30.7	15.4
4	13250.00	33.4 AV	54.0	-20.6	1.89 H	127	18.0	15.4
5	19875.00	59.0 PK	74.0	-15.0	1.84 H	21	63.5	-4.5
6	19875.00	45.9 AV	54.0	-8.1	1.84 H	21	50.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

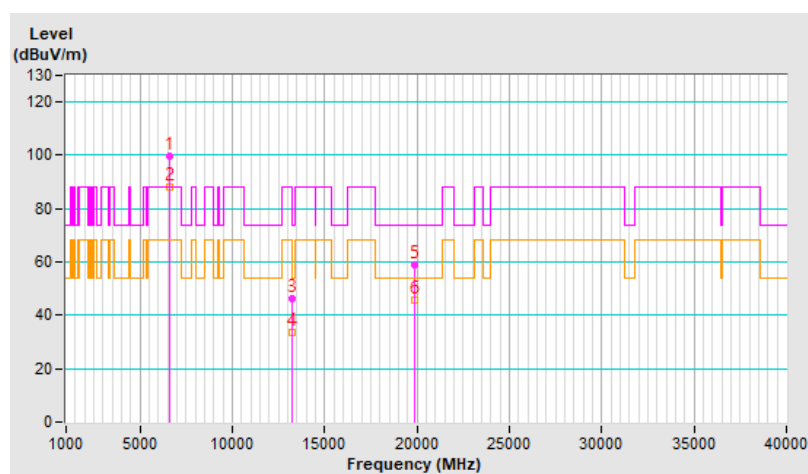


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	92.4 PK			1.45 V	46	84.6	7.8
2	*6625.00	81.9 AV			1.45 V	46	74.1	7.8
3	13250.00	45.8 PK	74.0	-28.2	1.64 V	100	30.4	15.4
4	13250.00	33.8 AV	54.0	-20.2	1.64 V	100	18.4	15.4
5	19875.00	59.4 PK	74.0	-14.6	1.74 V	39	63.9	-4.5
6	19875.00	46.6 AV	54.0	-7.4	1.74 V	39	51.1	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

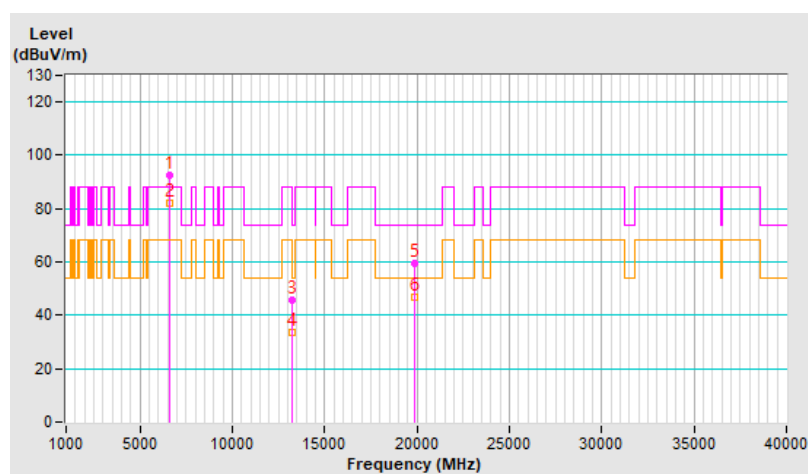


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	95.7 PK			1.80 H	222	88.0	7.7
2	*6785.00	83.5 AV			1.80 H	222	75.8	7.7
3	#13570.00	46.1 PK	88.2	-42.1	1.81 H	124	30.4	15.7
4	#13570.00	33.4 AV	68.2	-34.8	1.81 H	124	17.7	15.7
5	20355.00	58.5 PK	74.0	-15.5	1.83 H	21	62.3	-3.8
6	20355.00	45.3 AV	54.0	-8.7	1.83 H	21	49.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

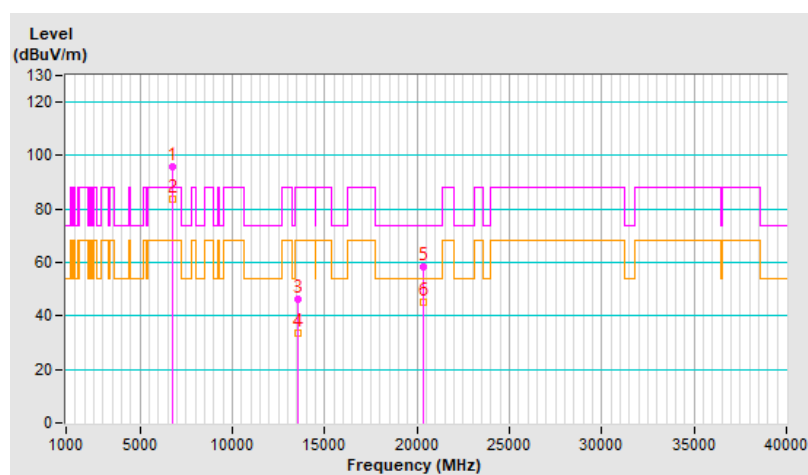


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	90.9 PK			1.48 V	148	83.2	7.7
2	*6785.00	79.9 AV			1.48 V	148	72.2	7.7
3	#13570.00	45.7 PK	88.2	-42.5	1.67 V	128	30.0	15.7
4	#13570.00	33.5 AV	68.2	-34.7	1.67 V	128	17.8	15.7
5	20355.00	59.7 PK	74.0	-14.3	1.79 V	48	63.5	-3.8
6	20355.00	46.9 AV	54.0	-7.1	1.79 V	48	50.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

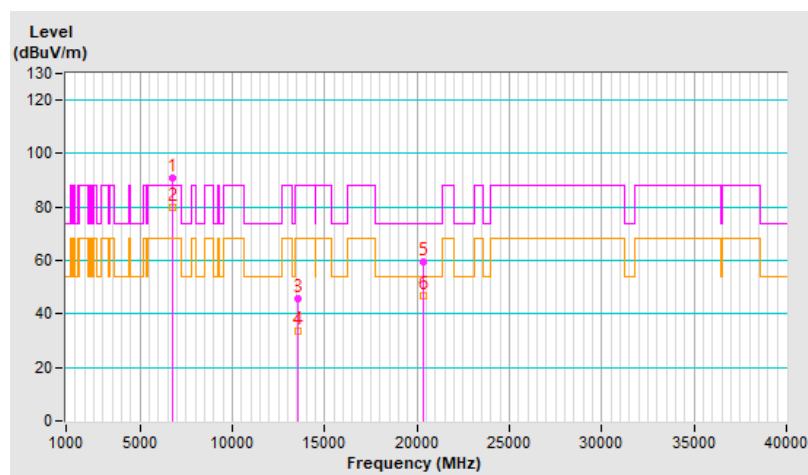


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.4 PK	88.2	-30.8	1.98 H	272	51.8	5.6
2	#5925.00	43.6 AV	68.2	-24.6	1.98 H	272	38.0	5.6
3	*6025.00	99.1 PK			1.98 H	272	93.5	5.6
4	*6025.00	87.7 AV			1.98 H	272	82.1	5.6
5	12050.00	45.5 PK	74.0	-28.5	1.89 H	134	30.9	14.6
6	12050.00	33.0 AV	54.0	-21.0	1.89 H	134	18.4	14.6
7	18075.00	58.5 PK	74.0	-15.5	1.77 H	14	63.8	-5.3
8	18075.00	45.3 AV	54.0	-8.7	1.77 H	14	50.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

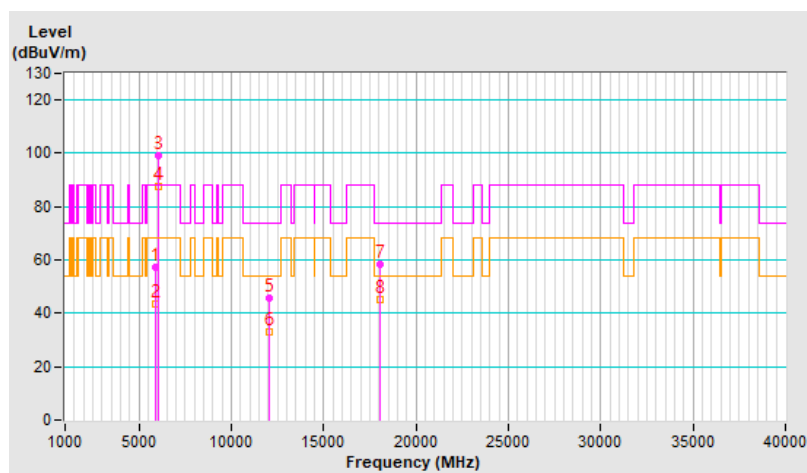


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.0 PK	88.2	-35.2	1.81 V	333	47.4	5.6
2	#5925.00	41.2 AV	68.2	-27.0	1.81 V	333	35.6	5.6
3	*6025.00	92.2 PK			1.81 V	333	86.6	5.6
4	*6025.00	80.9 AV			1.81 V	333	75.3	5.6
5	12050.00	45.9 PK	74.0	-28.1	1.67 V	118	31.3	14.6
6	12050.00	33.3 AV	54.0	-20.7	1.67 V	118	18.7	14.6
7	18075.00	59.7 PK	74.0	-14.3	1.74 V	40	65.0	-5.3
8	18075.00	46.8 AV	54.0	-7.2	1.74 V	40	52.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

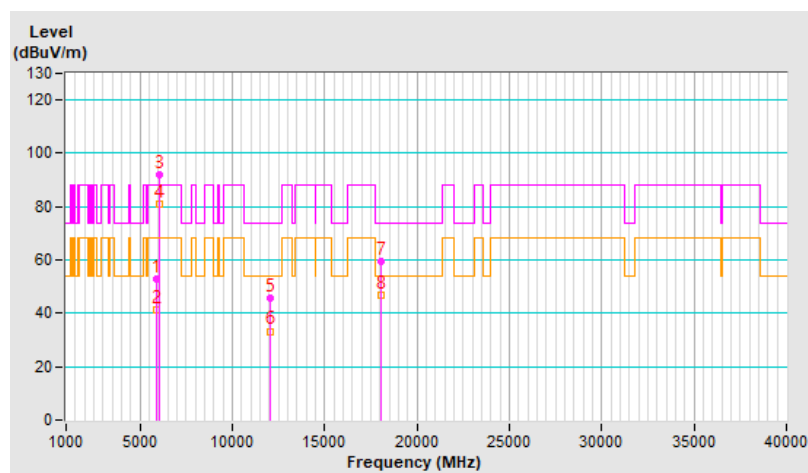


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	99.7 PK			1.98 H	272	93.3	6.4
2	*6345.00	88.0 AV			1.98 H	272	81.6	6.4
3	12690.00	46.0 PK	74.0	-28.0	1.85 H	148	31.1	14.9
4	12690.00	33.6 AV	54.0	-20.4	1.85 H	148	18.7	14.9
5	19035.00	58.2 PK	74.0	-15.8	1.80 H	8	63.1	-4.9
6	19035.00	45.3 AV	54.0	-8.7	1.80 H	8	50.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

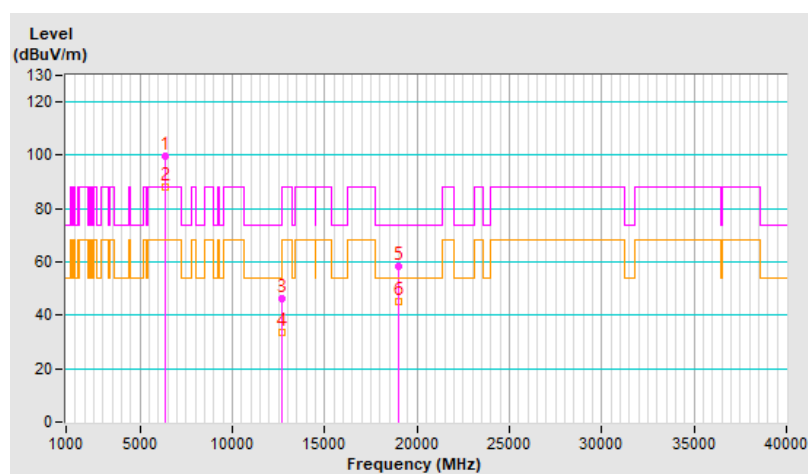


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	92.6 PK			1.83 V	337	86.2	6.4
2	*6345.00	81.0 AV			1.83 V	337	74.6	6.4
3	12690.00	45.1 PK	74.0	-28.9	1.69 V	127	30.2	14.9
4	12690.00	33.1 AV	54.0	-20.9	1.69 V	127	18.2	14.9
5	19035.00	59.9 PK	74.0	-14.1	1.73 V	45	64.8	-4.9
6	19035.00	47.1 AV	54.0	-6.9	1.73 V	45	52.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

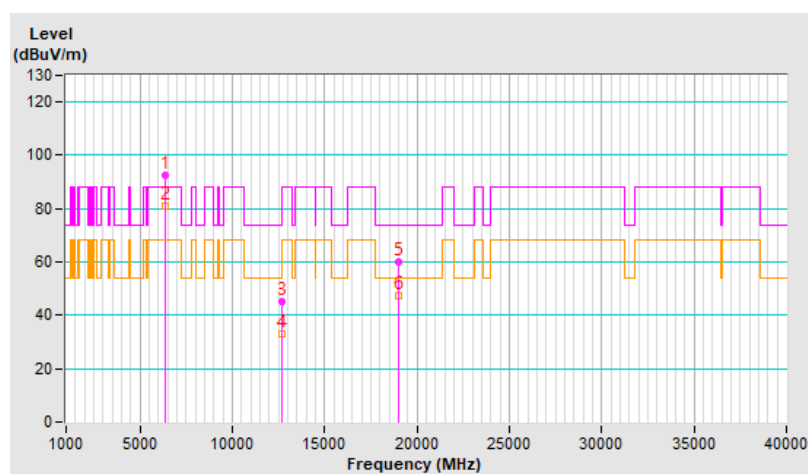


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	99.3 PK			1.94 H	272	91.5	7.8
2	*6665.00	89.5 AV			1.94 H	272	81.7	7.8
3	13330.00	46.5 PK	74.0	-27.5	1.86 H	144	31.2	15.3
4	13330.00	33.8 AV	54.0	-20.2	1.86 H	144	18.5	15.3
5	19995.00	58.2 PK	74.0	-15.8	1.80 H	27	62.6	-4.4
6	19995.00	45.4 AV	54.0	-8.6	1.80 H	27	49.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

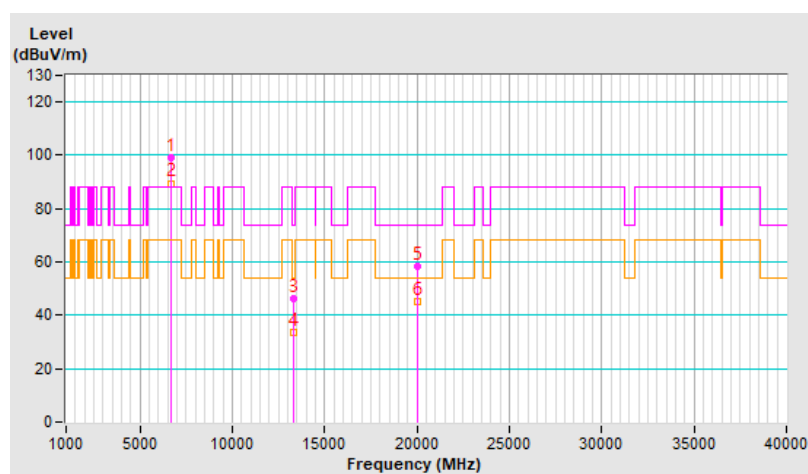


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	92.1 PK			1.62 V	147	84.3	7.8
2	*6665.00	81.4 AV			1.62 V	147	73.6	7.8
3	13330.00	45.6 PK	74.0	-28.4	1.64 V	105	30.3	15.3
4	13330.00	33.3 AV	54.0	-20.7	1.64 V	105	18.0	15.3
5	19995.00	59.7 PK	74.0	-14.3	1.74 V	54	64.1	-4.4
6	19995.00	47.0 AV	54.0	-7.0	1.74 V	54	51.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

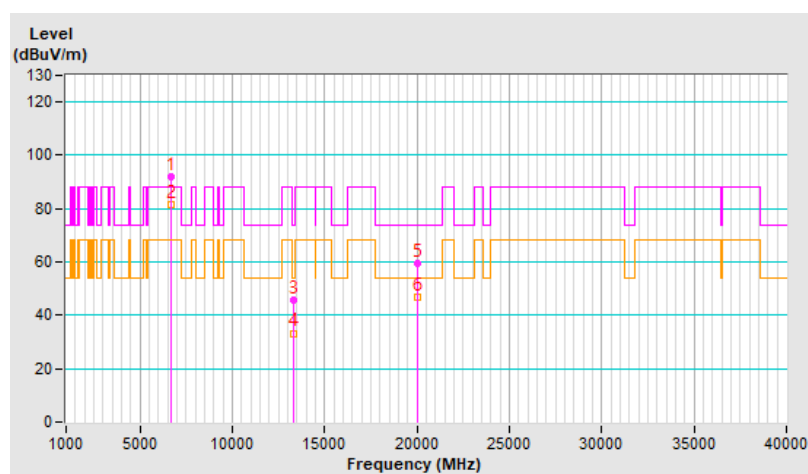


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.7 PK	88.2	-35.5	1.16 H	334	47.1	5.6
2	#5925.00	41.1 AV	68.2	-27.1	1.16 H	334	35.5	5.6
3	*6025.00	94.6 PK			1.16 H	334	89.0	5.6
4	*6025.00	82.6 AV			1.16 H	334	77.0	5.6
5	12050.00	46.4 PK	74.0	-27.6	1.81 H	154	31.8	14.6
6	12050.00	33.9 AV	54.0	-20.1	1.81 H	154	19.3	14.6
7	18075.00	58.0 PK	74.0	-16.0	1.82 H	9	63.3	-5.3
8	18075.00	45.0 AV	54.0	-9.0	1.82 H	9	50.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

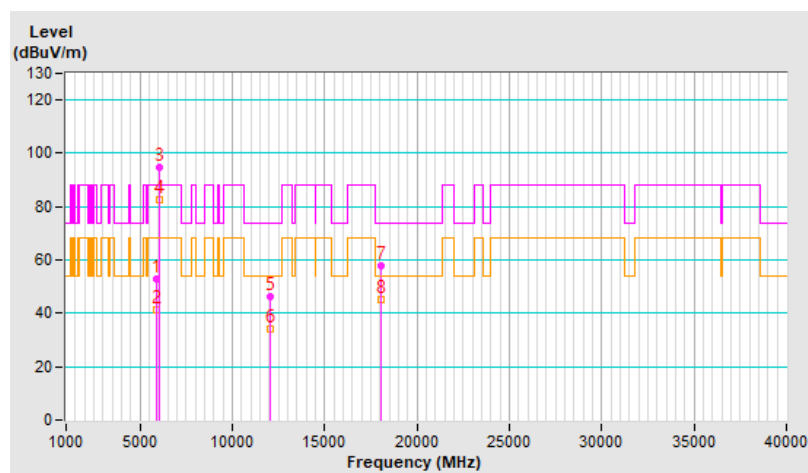


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.9 PK	88.2	-35.3	1.50 V	35	47.3	5.6
2	#5925.00	40.8 AV	68.2	-27.4	1.50 V	35	35.2	5.6
3	*6025.00	92.1 PK			1.50 V	35	86.5	5.6
4	*6025.00	81.4 AV			1.50 V	35	75.8	5.6
5	12050.00	45.3 PK	74.0	-28.7	1.65 V	112	30.7	14.6
6	12050.00	33.1 AV	54.0	-20.9	1.65 V	112	18.5	14.6
7	18075.00	59.6 PK	74.0	-14.4	1.74 V	51	64.9	-5.3
8	18075.00	46.8 AV	54.0	-7.2	1.74 V	51	52.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

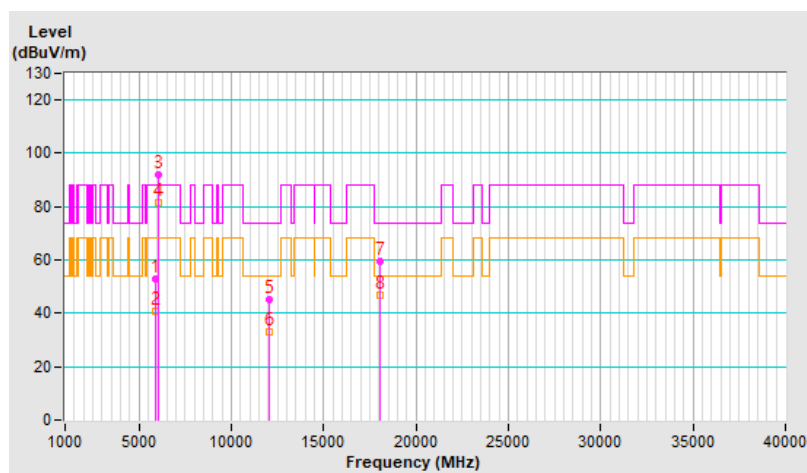


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	94.7 PK			1.16 H	326	88.3	6.4
2	*6345.00	82.9 AV			1.16 H	326	76.5	6.4
3	12690.00	46.7 PK	74.0	-27.3	1.80 H	124	31.8	14.9
4	12690.00	34.0 AV	54.0	-20.0	1.80 H	124	19.1	14.9
5	19035.00	58.1 PK	74.0	-15.9	1.78 H	4	63.0	-4.9
6	19035.00	45.2 AV	54.0	-8.8	1.78 H	4	50.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

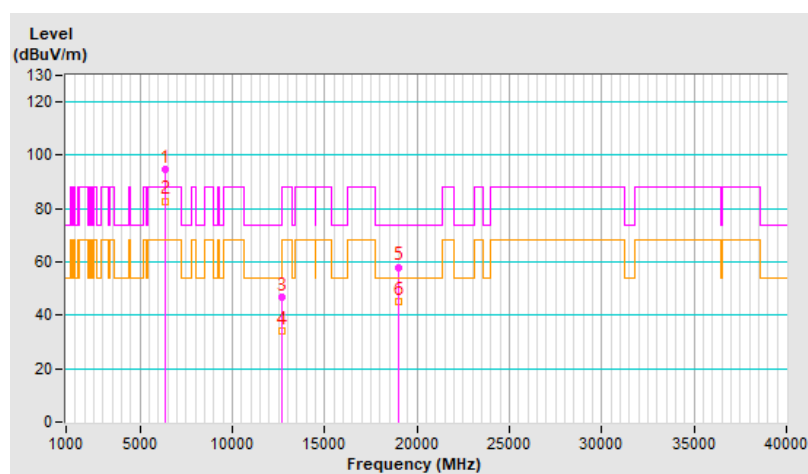


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	91.8 PK			1.53 V	48	85.4	6.4
2	*6345.00	80.9 AV			1.53 V	48	74.5	6.4
3	12690.00	46.0 PK	74.0	-28.0	1.63 V	101	31.1	14.9
4	12690.00	33.9 AV	54.0	-20.1	1.63 V	101	19.0	14.9
5	19035.00	59.9 PK	74.0	-14.1	1.73 V	26	64.8	-4.9
6	19035.00	46.8 AV	54.0	-7.2	1.73 V	26	51.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

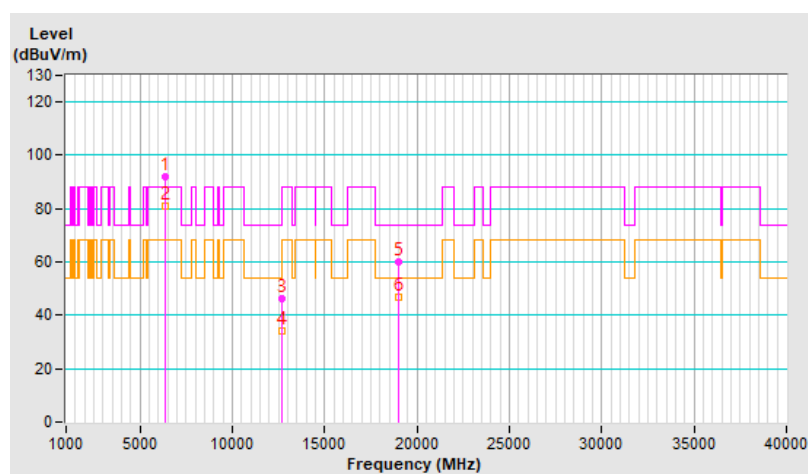


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.6 PK			1.94 H	277	92.8	7.8
2	*6665.00	88.0 AV			1.94 H	277	80.2	7.8
3	13330.00	45.6 PK	74.0	-28.4	1.81 H	127	30.3	15.3
4	13330.00	33.2 AV	54.0	-20.8	1.81 H	127	17.9	15.3
5	19995.00	58.2 PK	74.0	-15.8	1.75 H	22	62.6	-4.4
6	19995.00	45.4 AV	54.0	-8.6	1.75 H	22	49.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

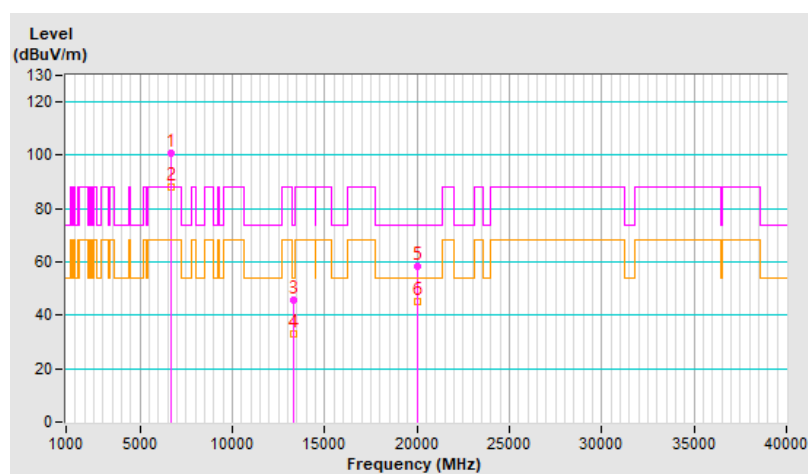


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	91.8 PK			1.70 V	147	84.0	7.8
2	*6665.00	81.3 AV			1.70 V	147	73.5	7.8
3	13330.00	46.0 PK	74.0	-28.0	1.59 V	103	30.7	15.3
4	13330.00	33.9 AV	54.0	-20.1	1.59 V	103	18.6	15.3
5	19995.00	60.2 PK	74.0	-13.8	1.73 V	53	64.6	-4.4
6	19995.00	47.4 AV	54.0	-6.6	1.73 V	53	51.8	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

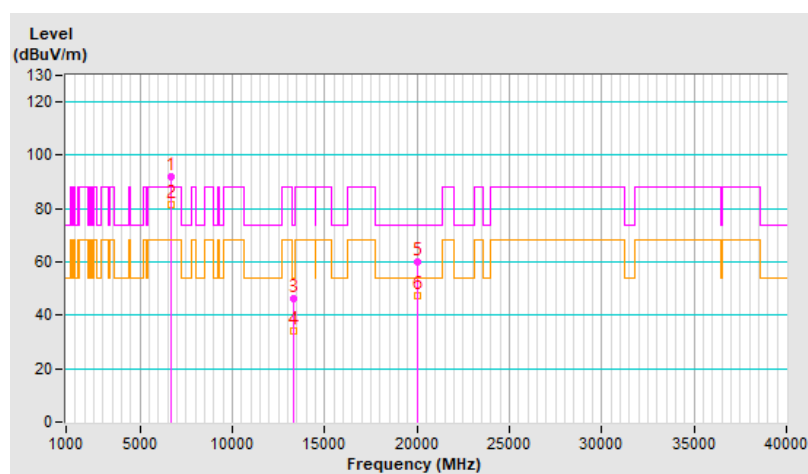


Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11a Channel 1

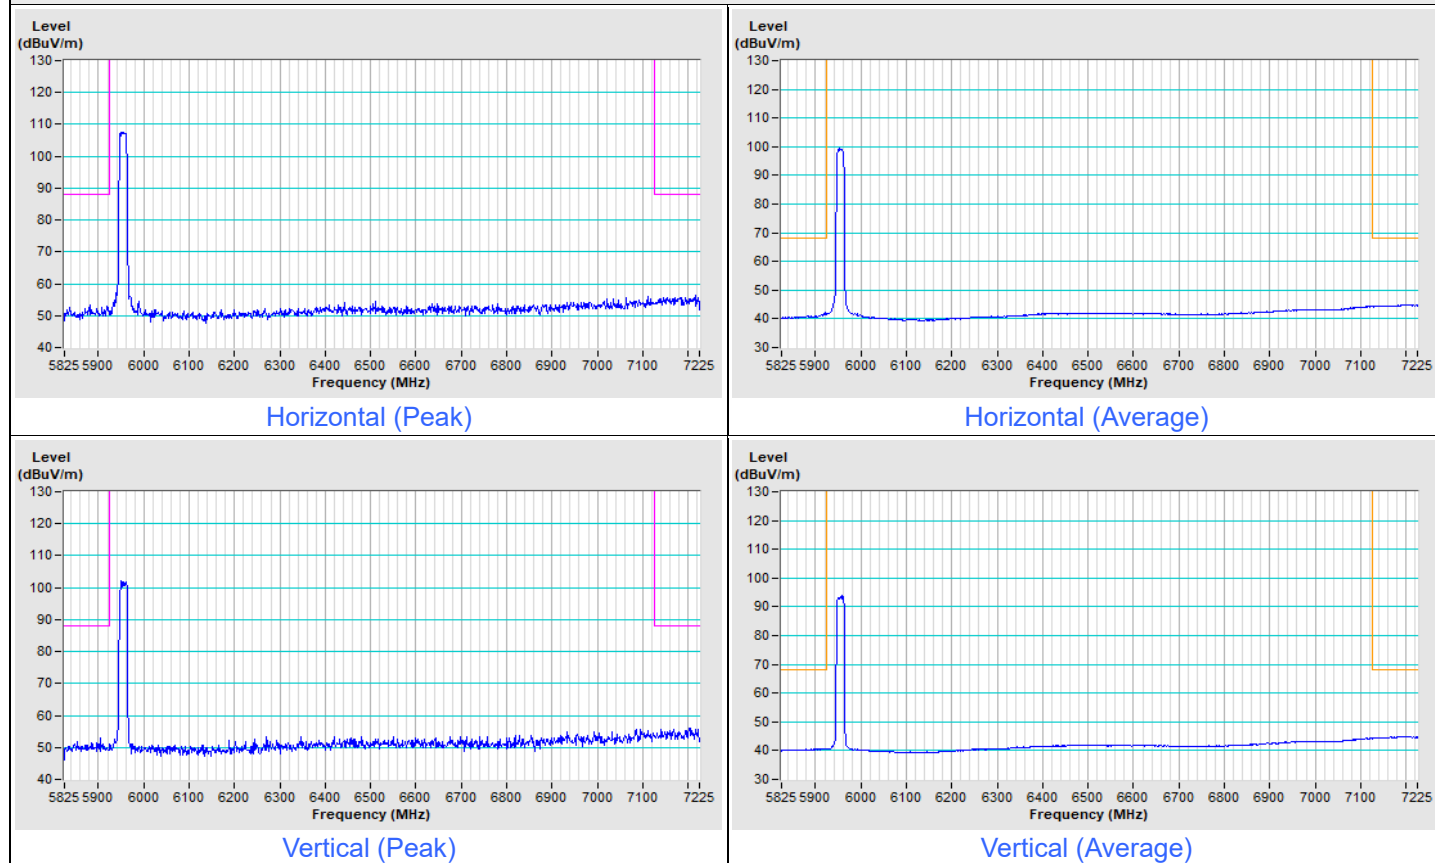


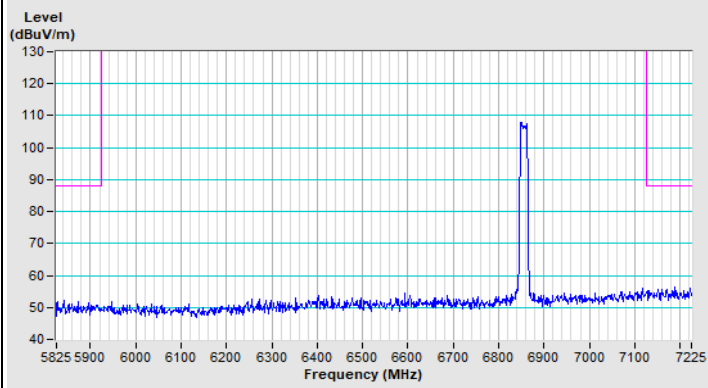802.11a Channel 181


Horizontal (Peak)

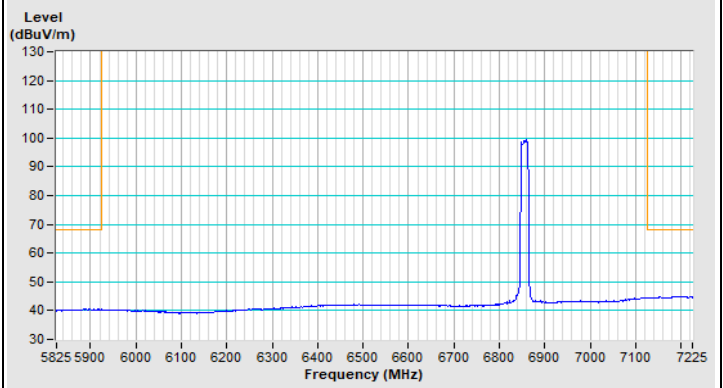

Horizontal (Average)

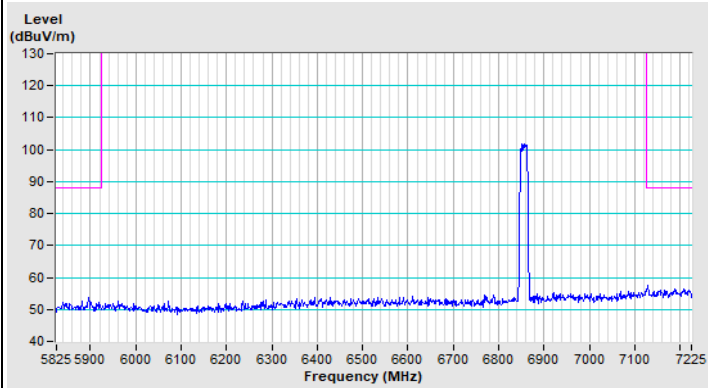


Vertical (Peak)

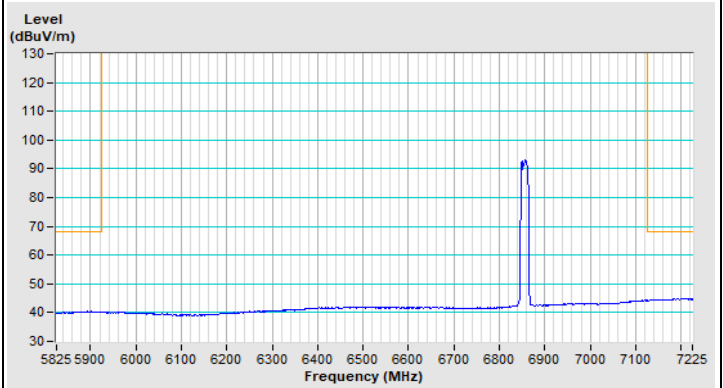


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) Channel 1

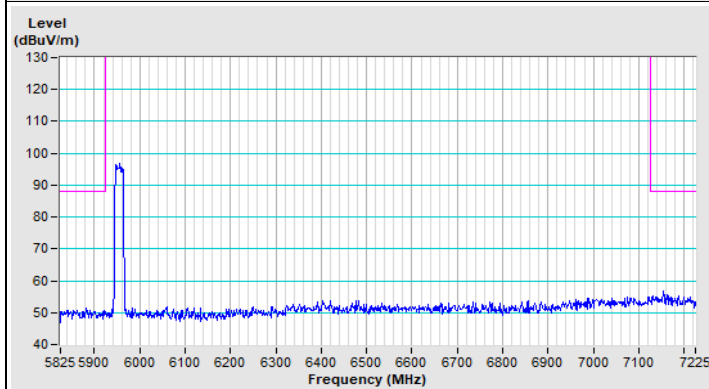


Horizontal (Peak)

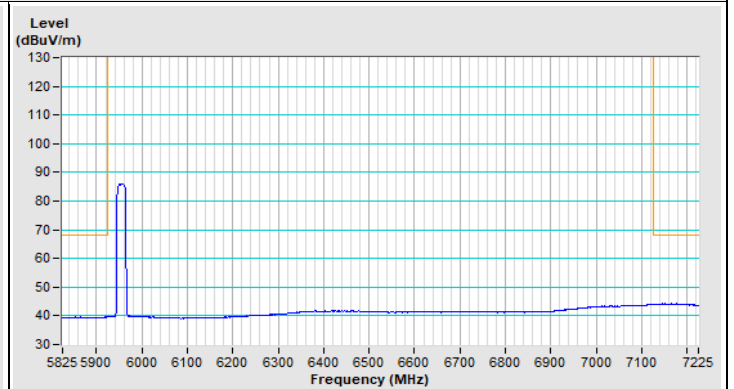


Horizontal (Average)

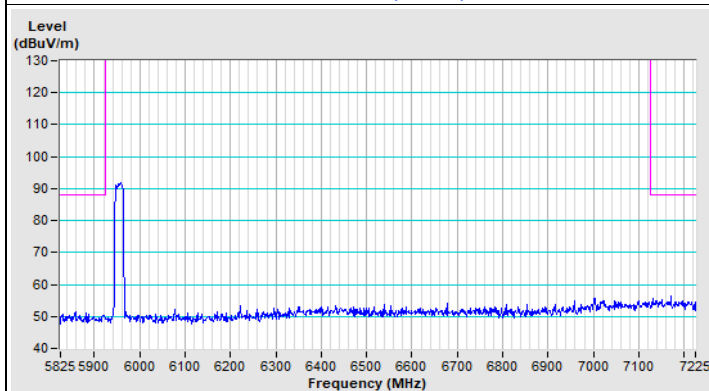


Vertical (Peak)

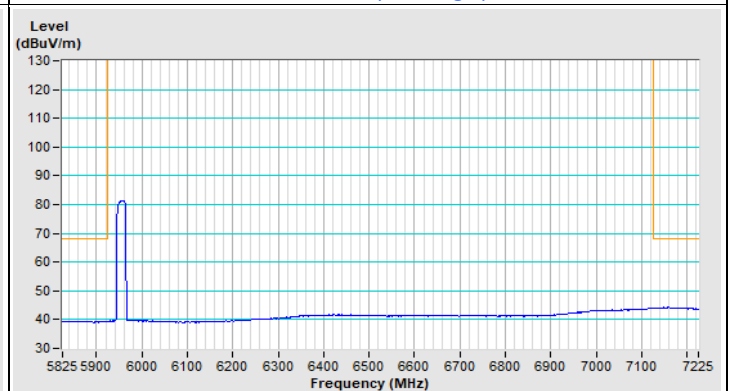


Vertical (Average)

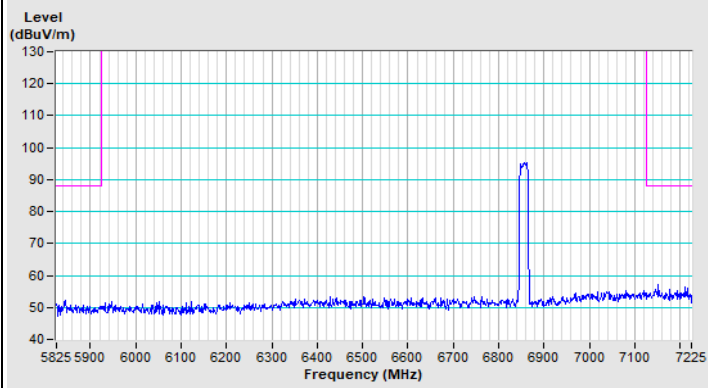802.11be (EHT20) Channel 181


Horizontal (Peak)

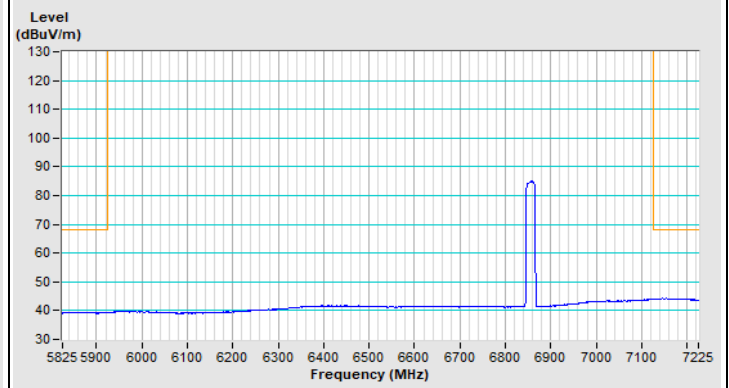

Horizontal (Average)

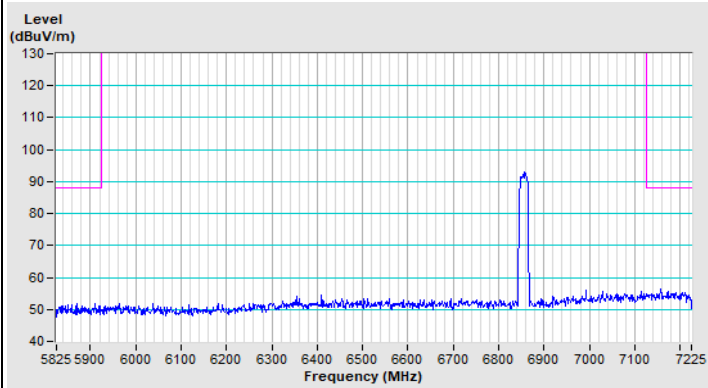


Vertical (Peak)

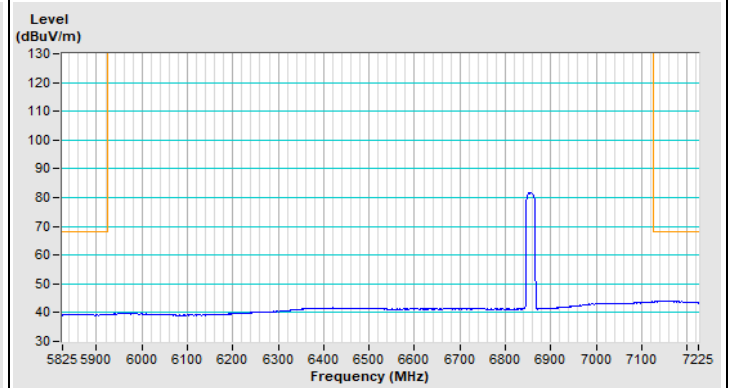


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 3

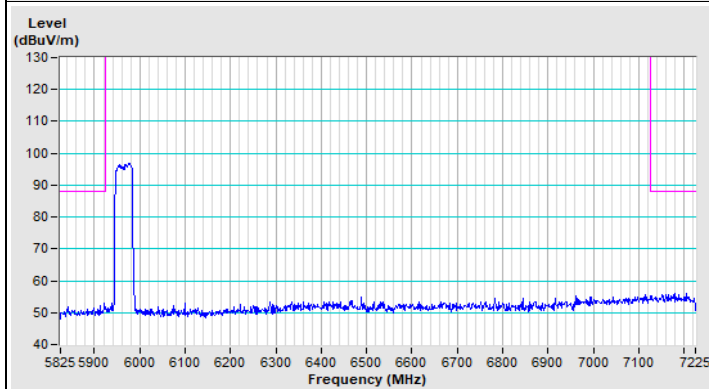


Horizontal (Peak)

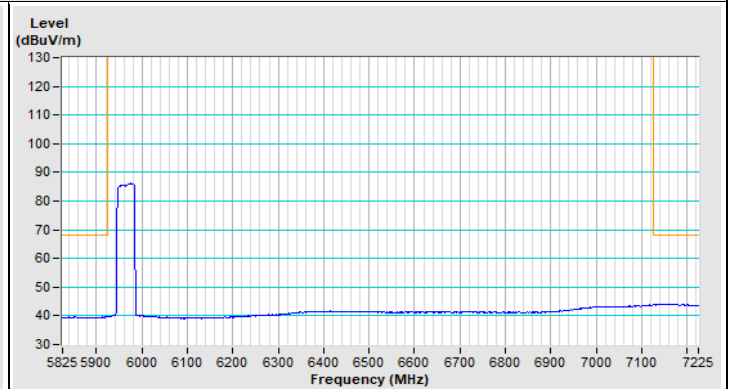

Horizontal (Average)

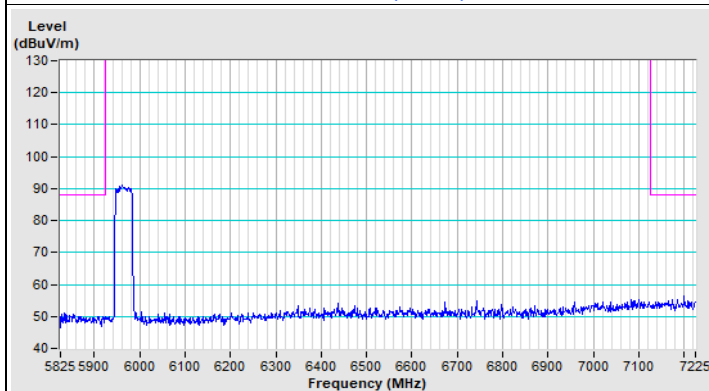


Vertical (Peak)

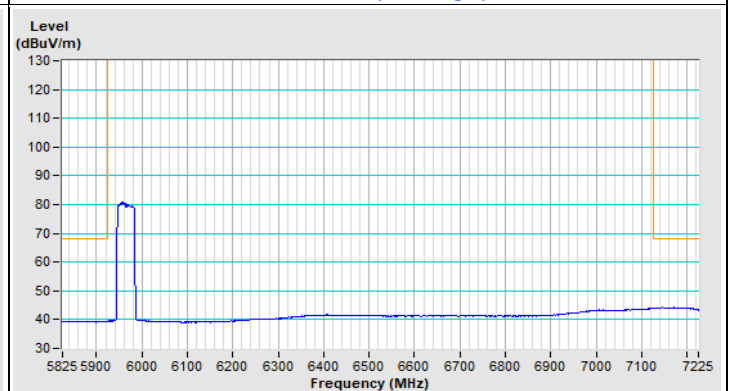


Vertical (Average)


802.11be (EHT40) Channel 179

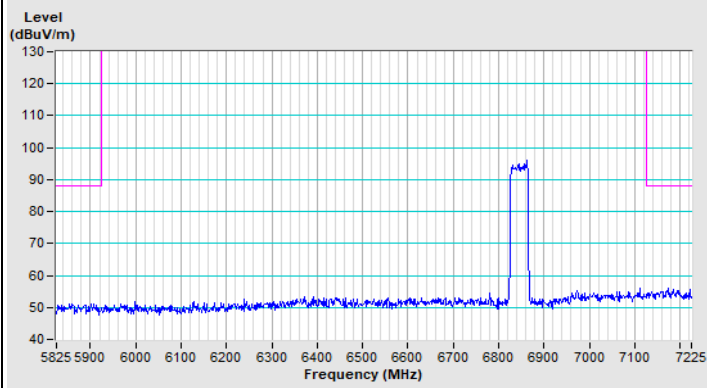


Horizontal (Peak)

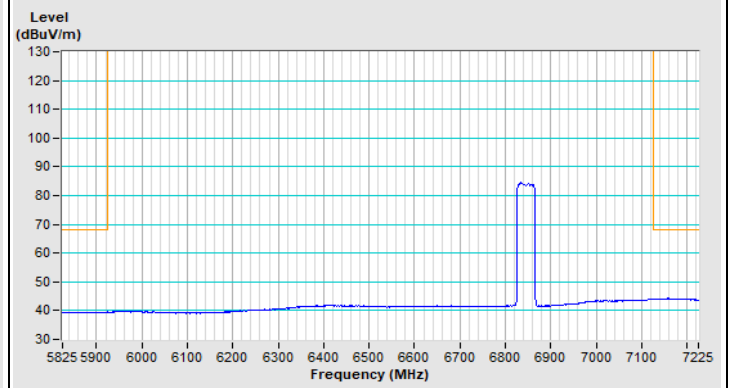

Horizontal (Average)

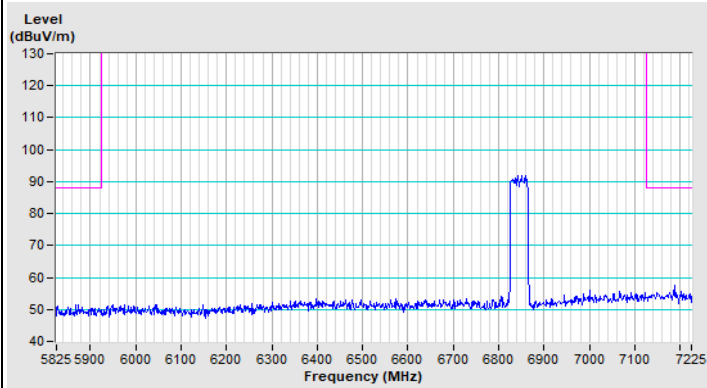


Vertical (Peak)

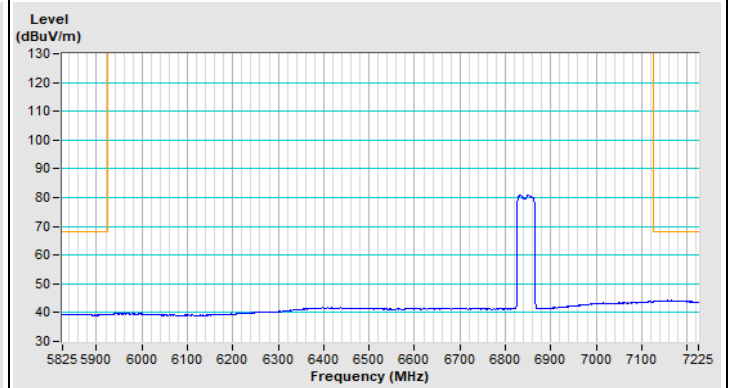


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 7

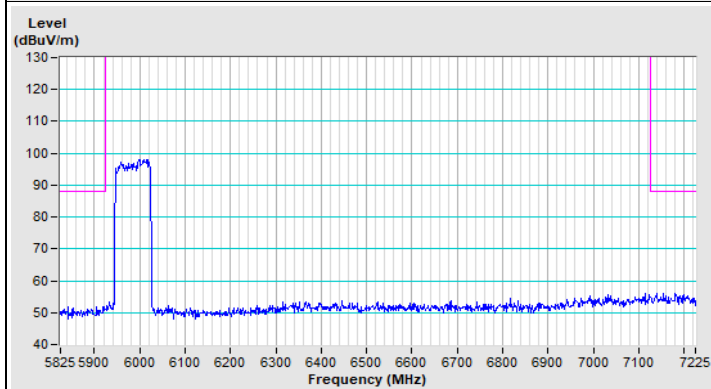


Horizontal (Peak)

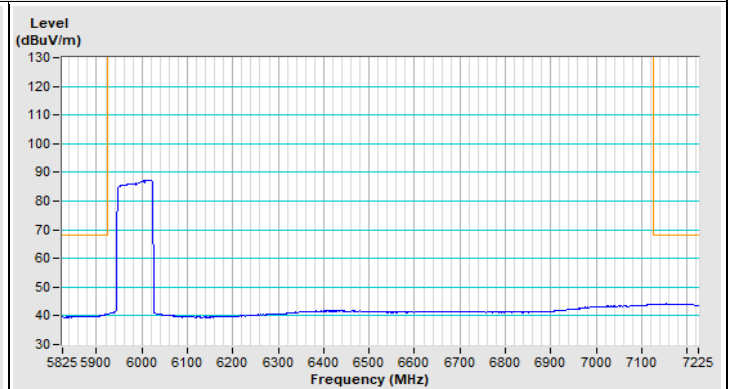

Horizontal (Average)

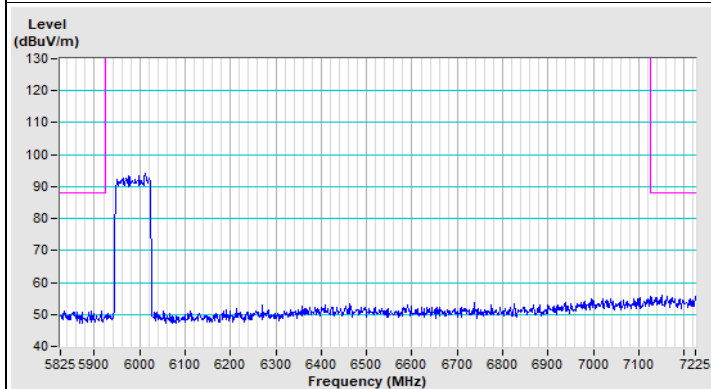


Vertical (Peak)

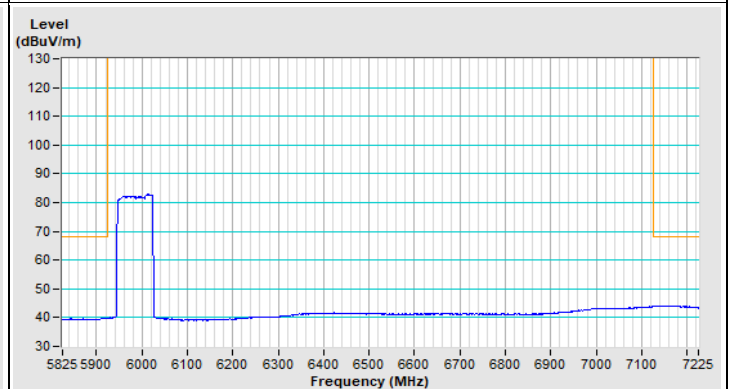


Vertical (Average)


802.11be (EHT80) Channel 167

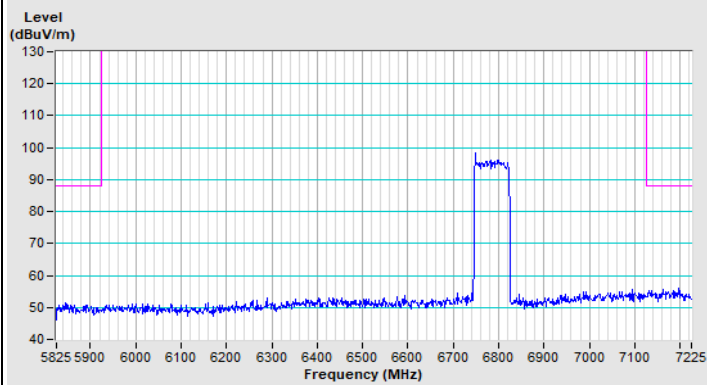


Horizontal (Peak)

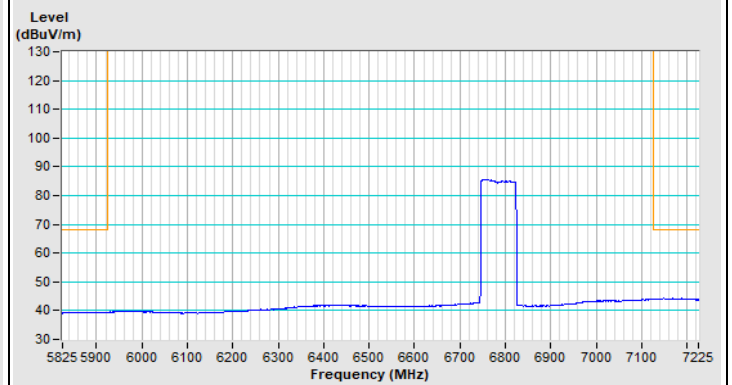

Horizontal (Average)

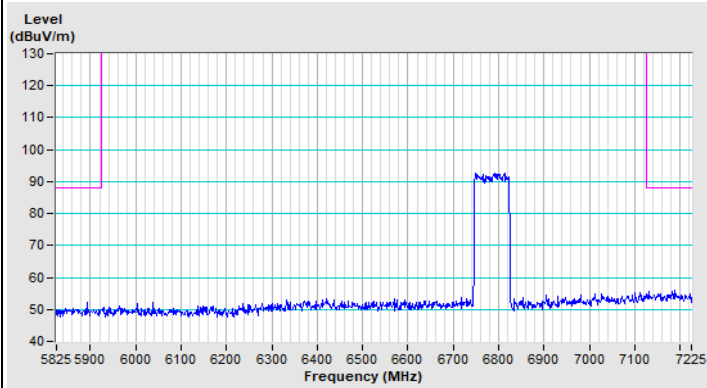


Vertical (Peak)

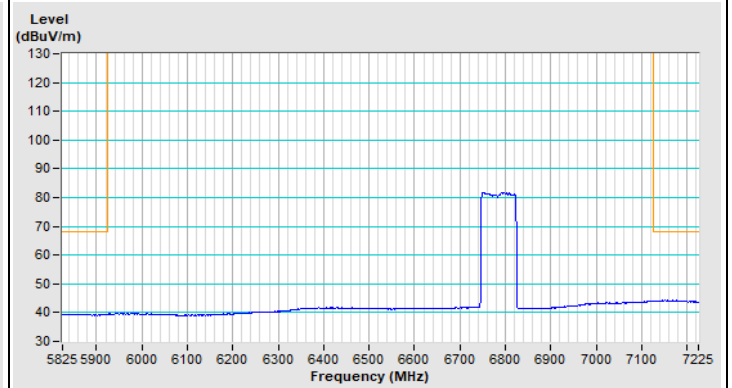


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 15

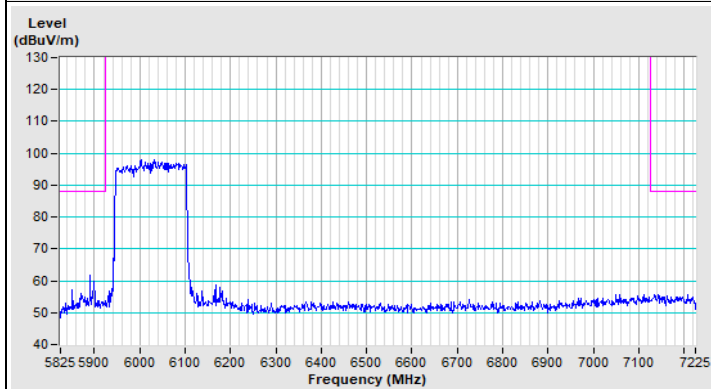


Horizontal (Peak)

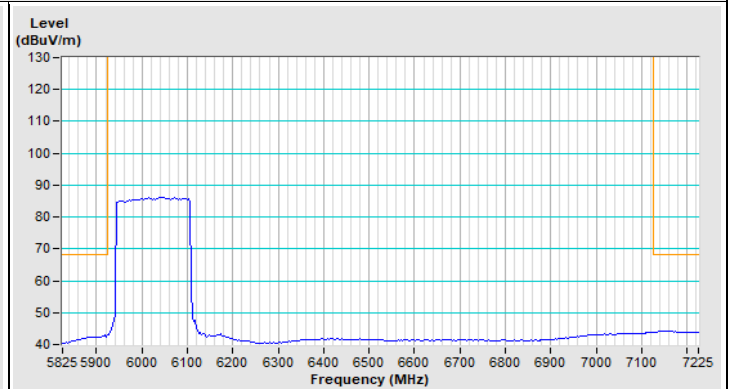

Horizontal (Average)

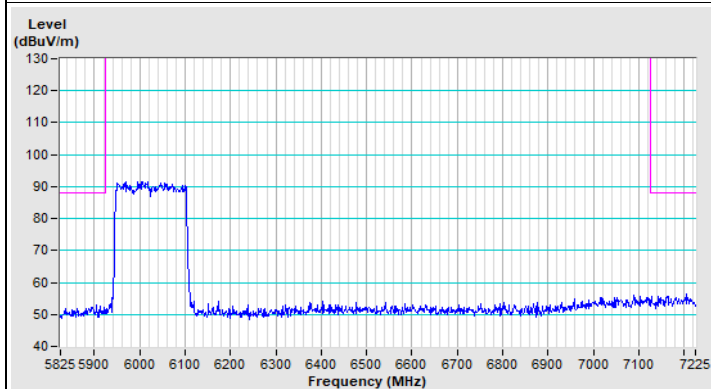


Vertical (Peak)

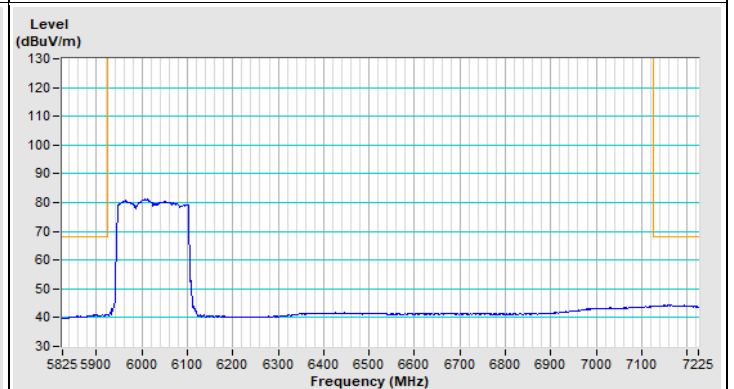


Vertical (Average)


802.11be (EHT160) Channel 143

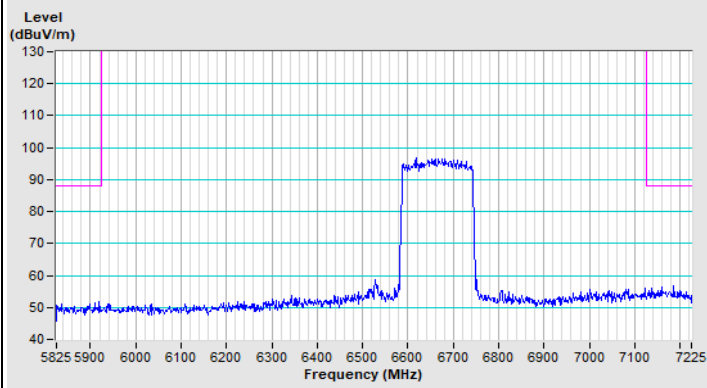


Horizontal (Peak)

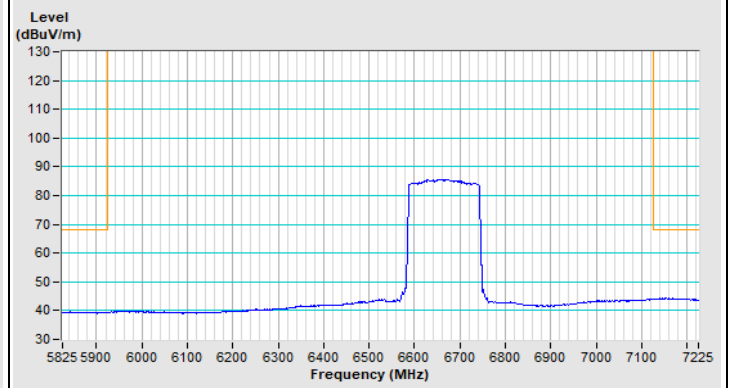

Horizontal (Average)

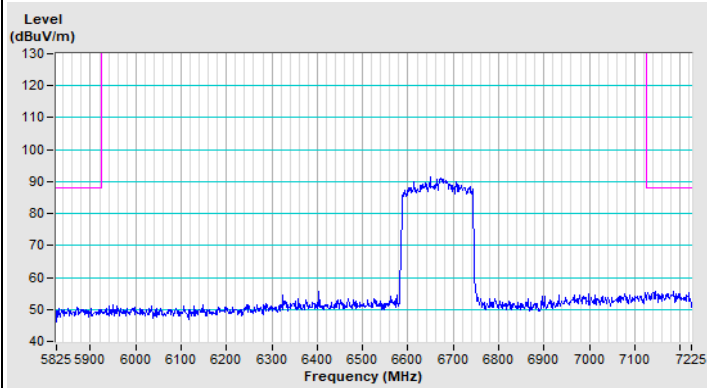


Vertical (Peak)

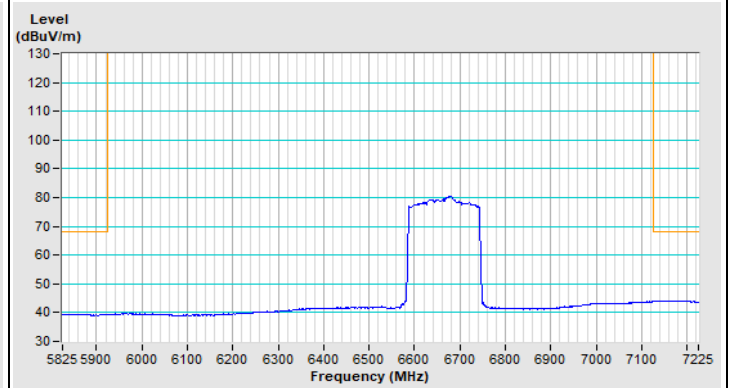


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

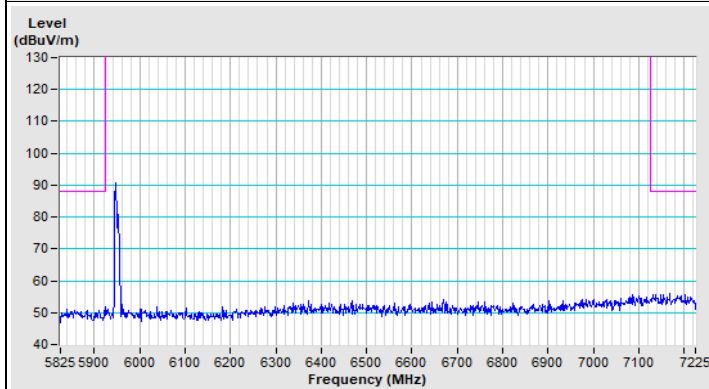


Horizontal (Peak)

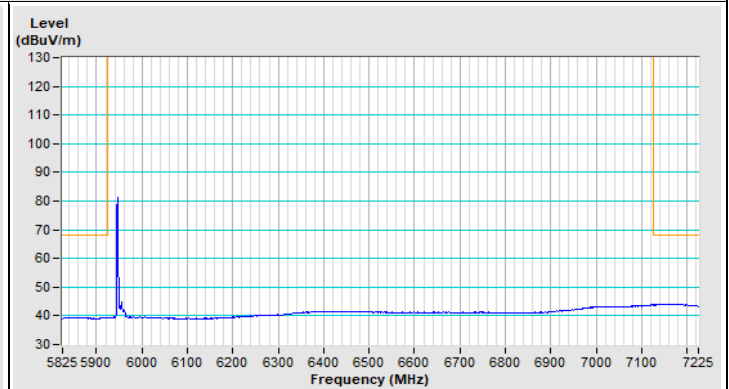

Horizontal (Average)

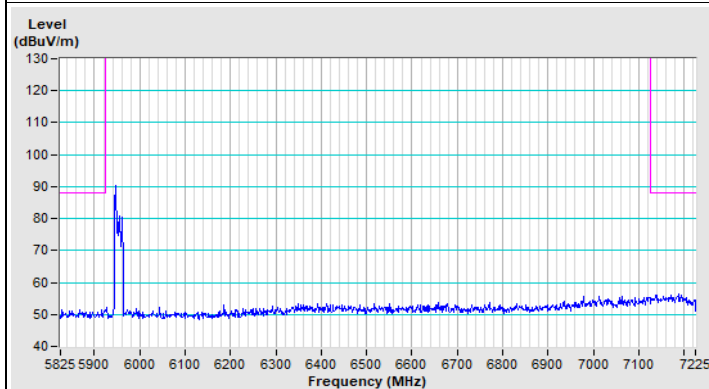


Vertical (Peak)

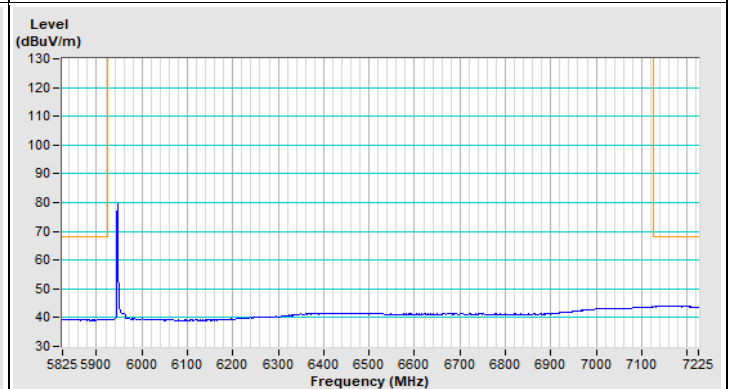


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 181

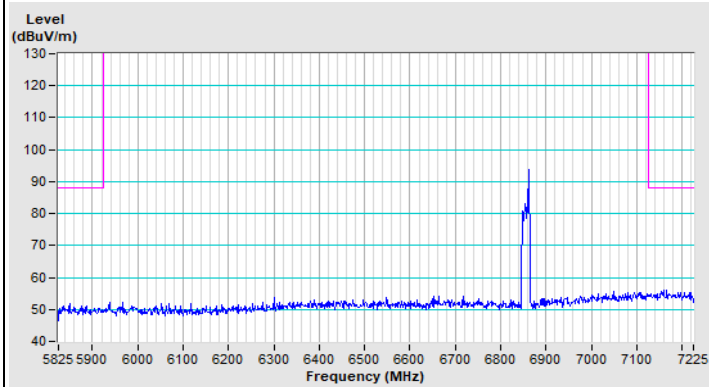


Horizontal (Peak)

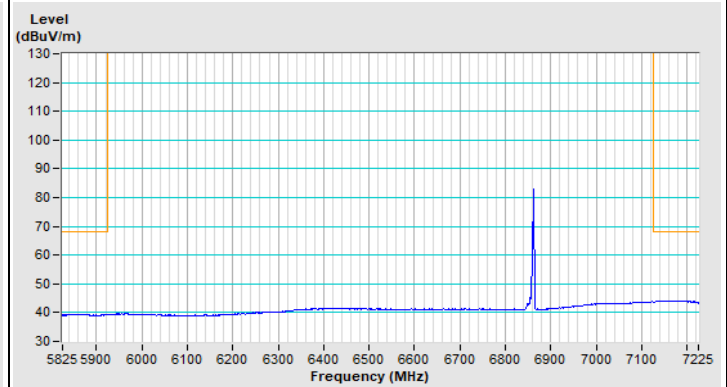

Horizontal (Average)

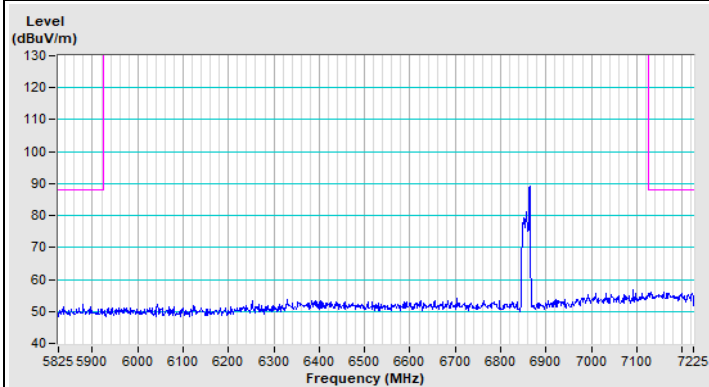


Vertical (Peak)

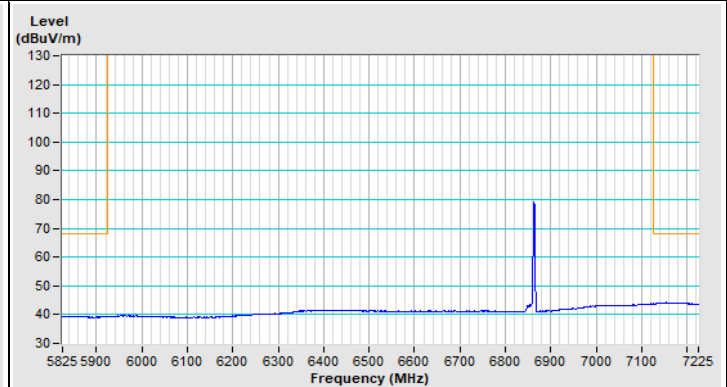


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

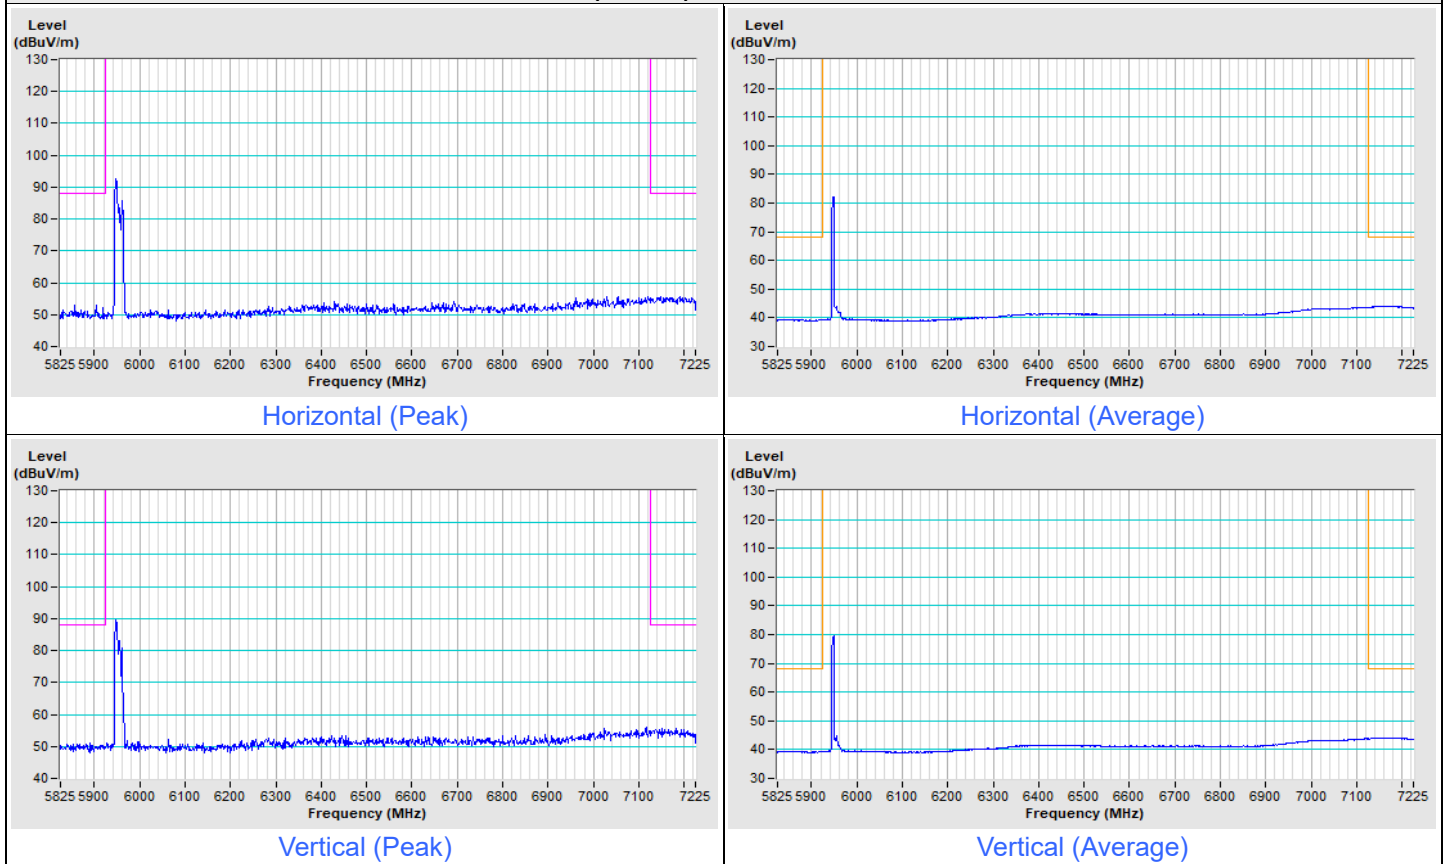


802.11be (EHT20) 52-tone RU Channel 181

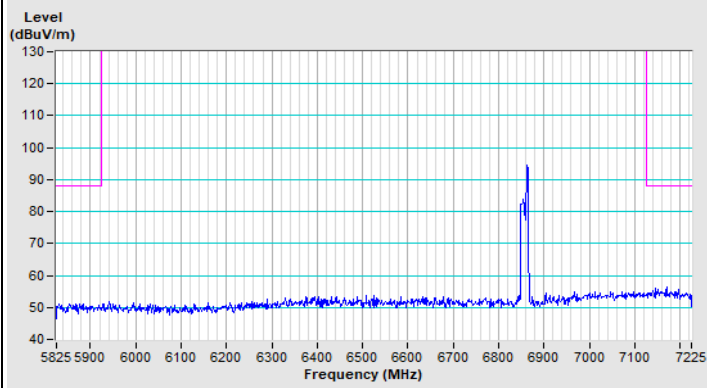


Horizontal (Peak)

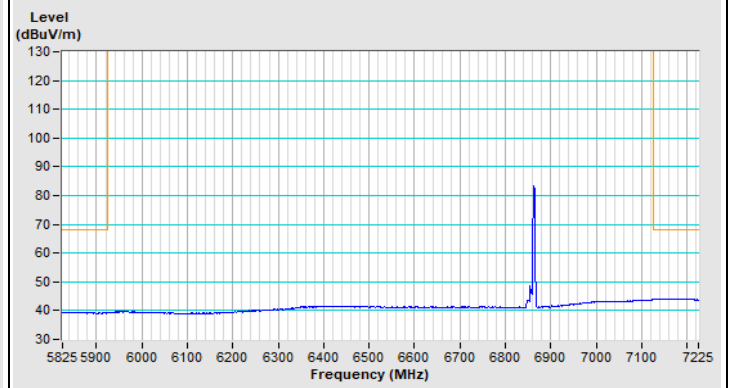

Horizontal (Average)

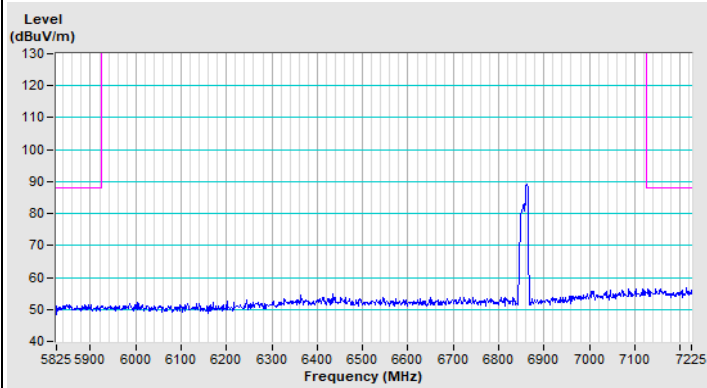


Vertical (Peak)

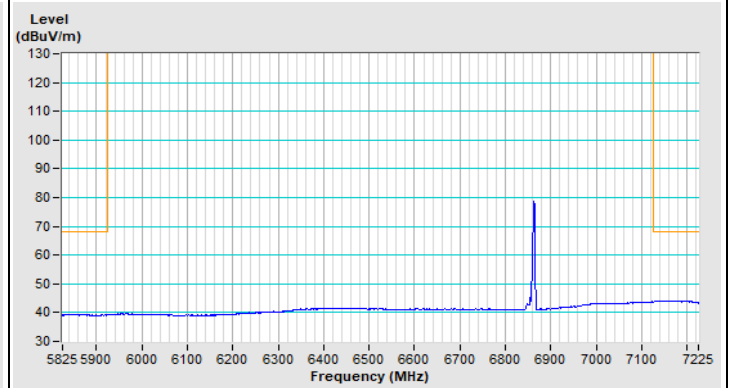


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

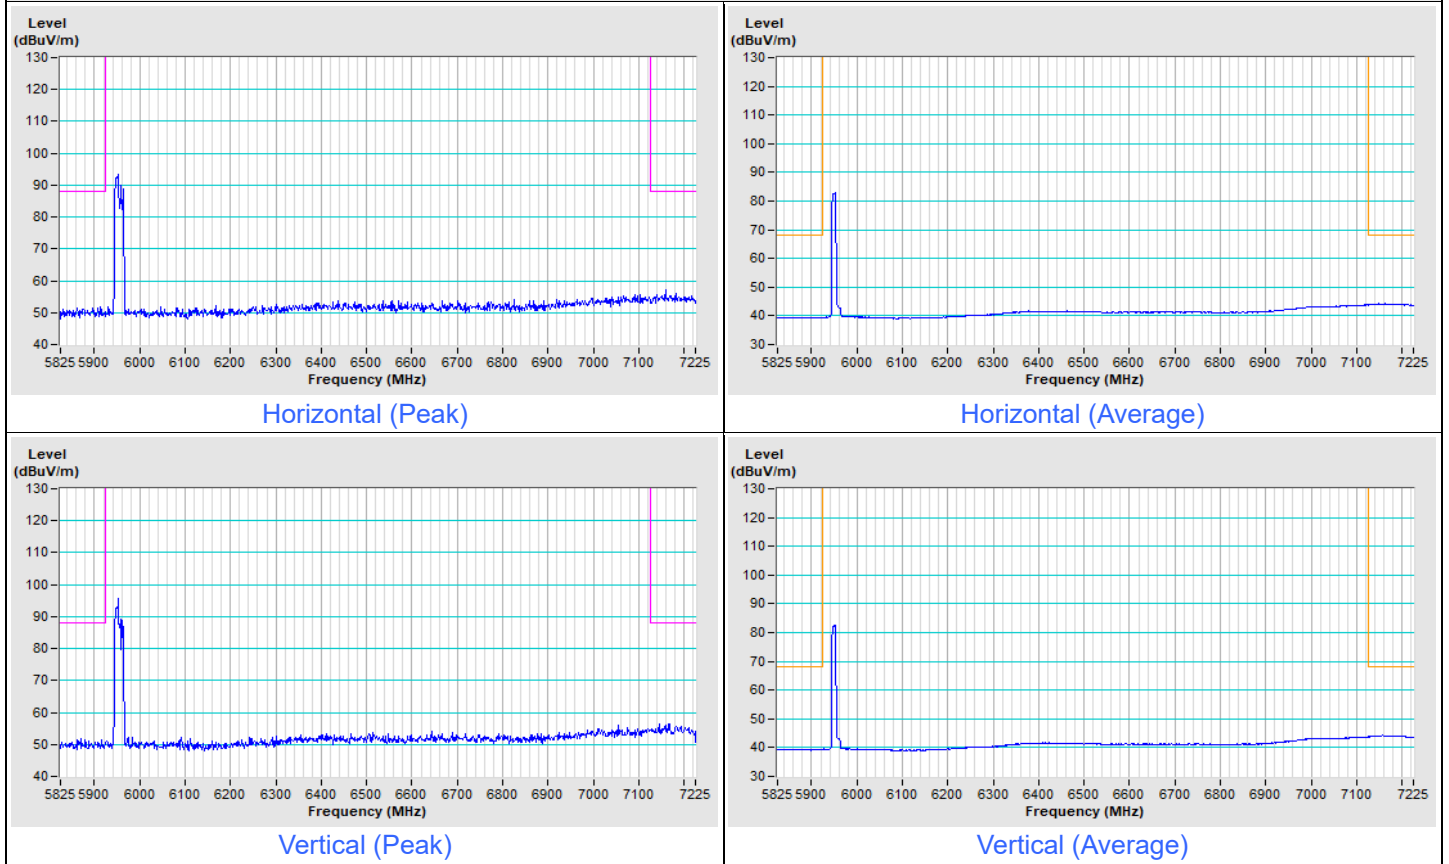


802.11be (EHT20) 106-tone RU Channel 181

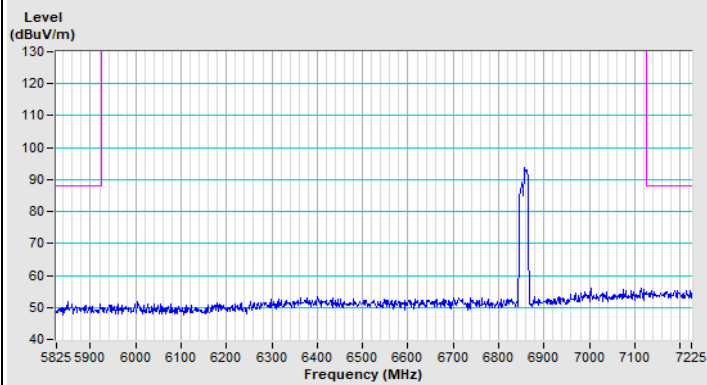


Horizontal (Peak)

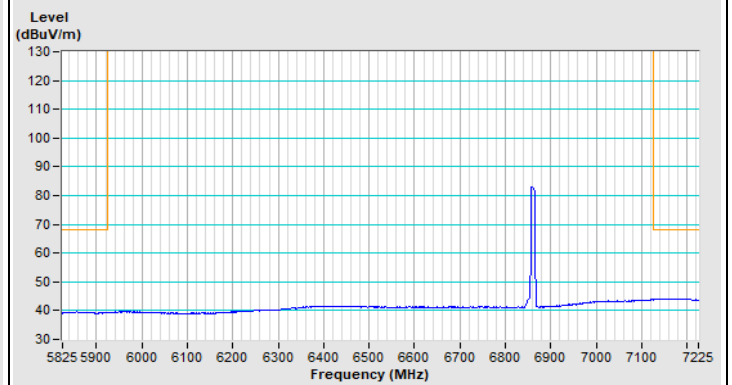

Horizontal (Average)

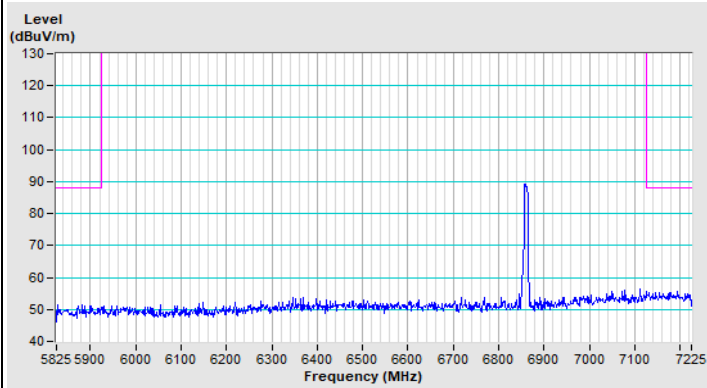


Vertical (Peak)

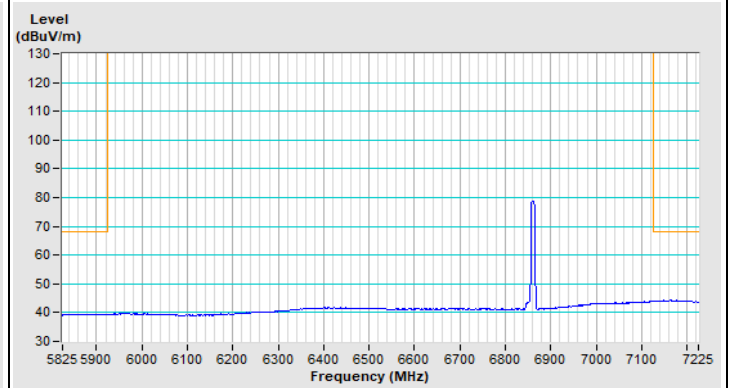


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

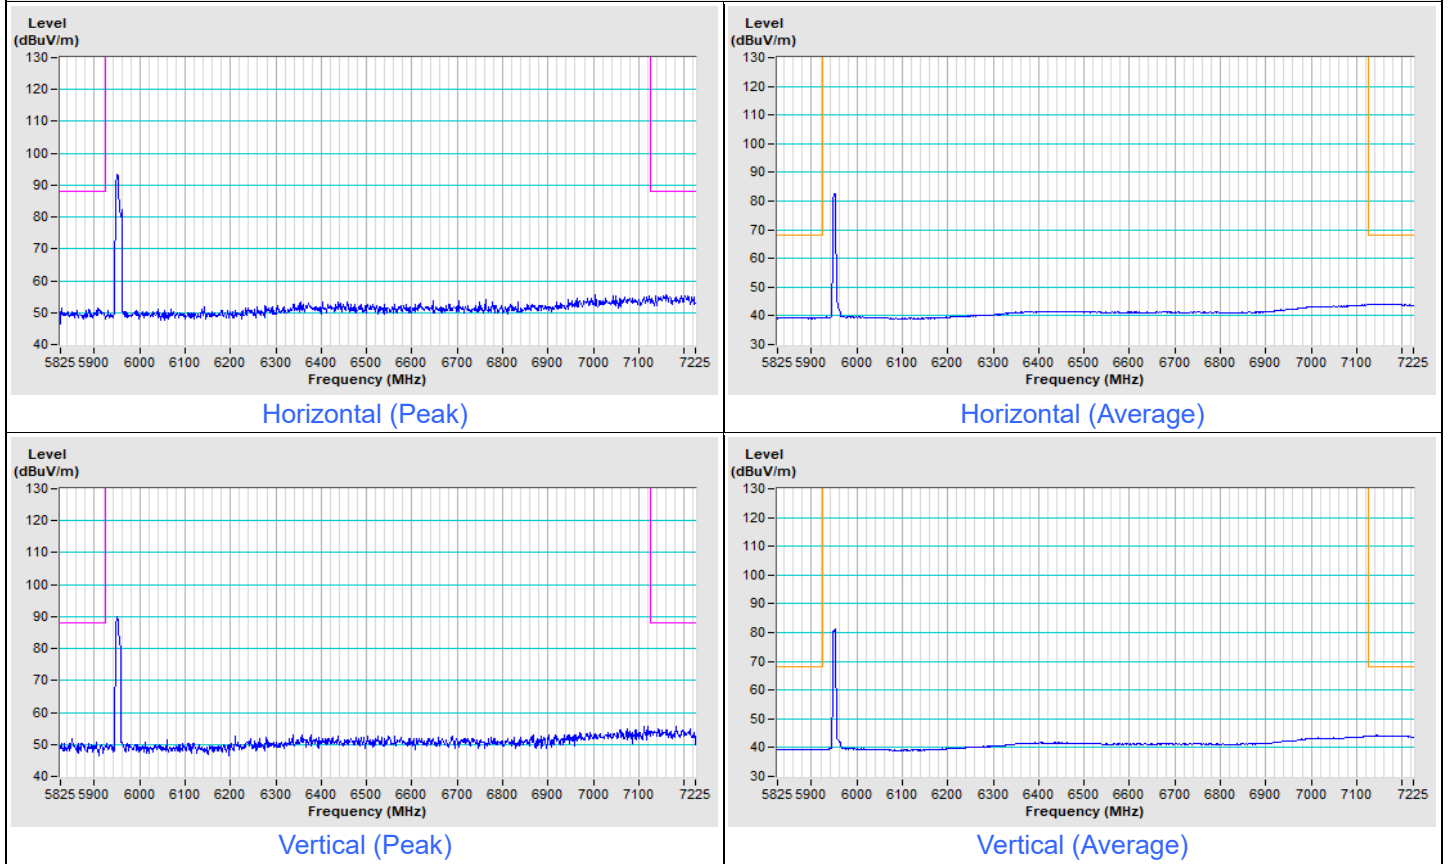


802.11be (EHT20) 52+26-tone MRU Channel 181

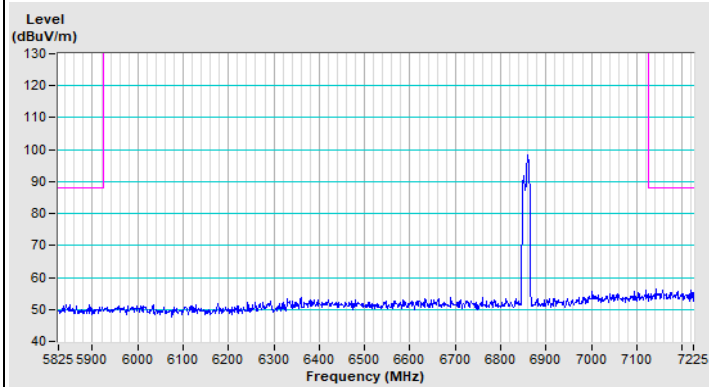


Horizontal (Peak)

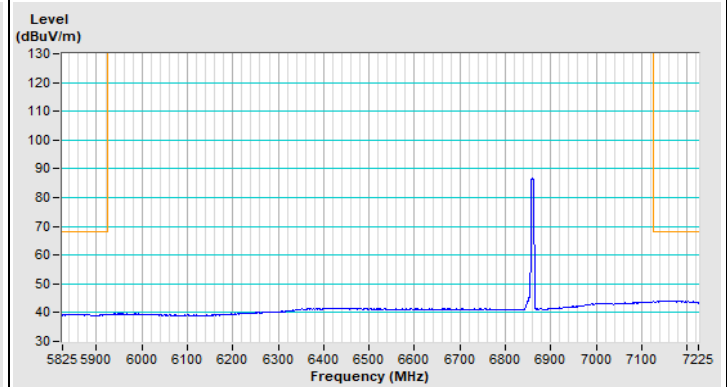

Horizontal (Average)

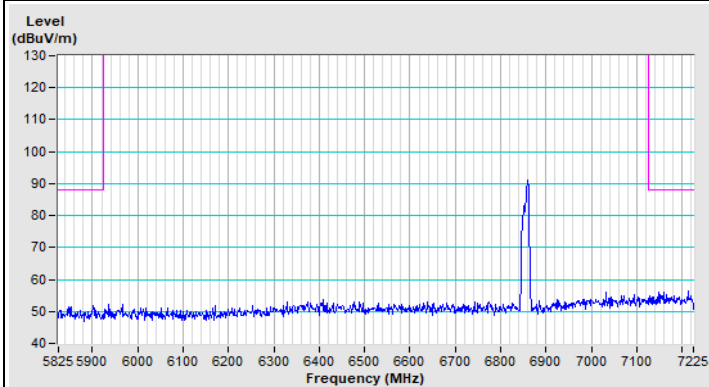


Vertical (Peak)

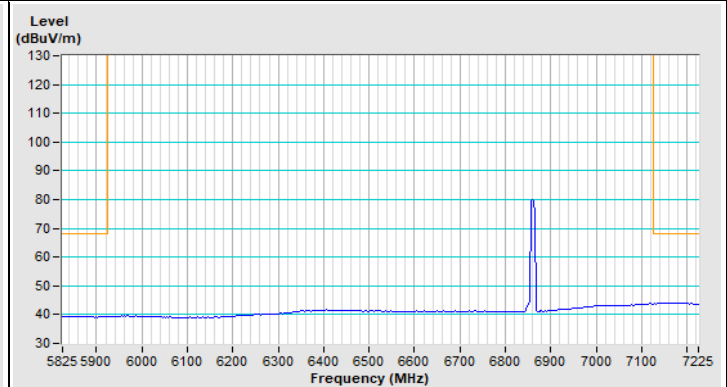


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

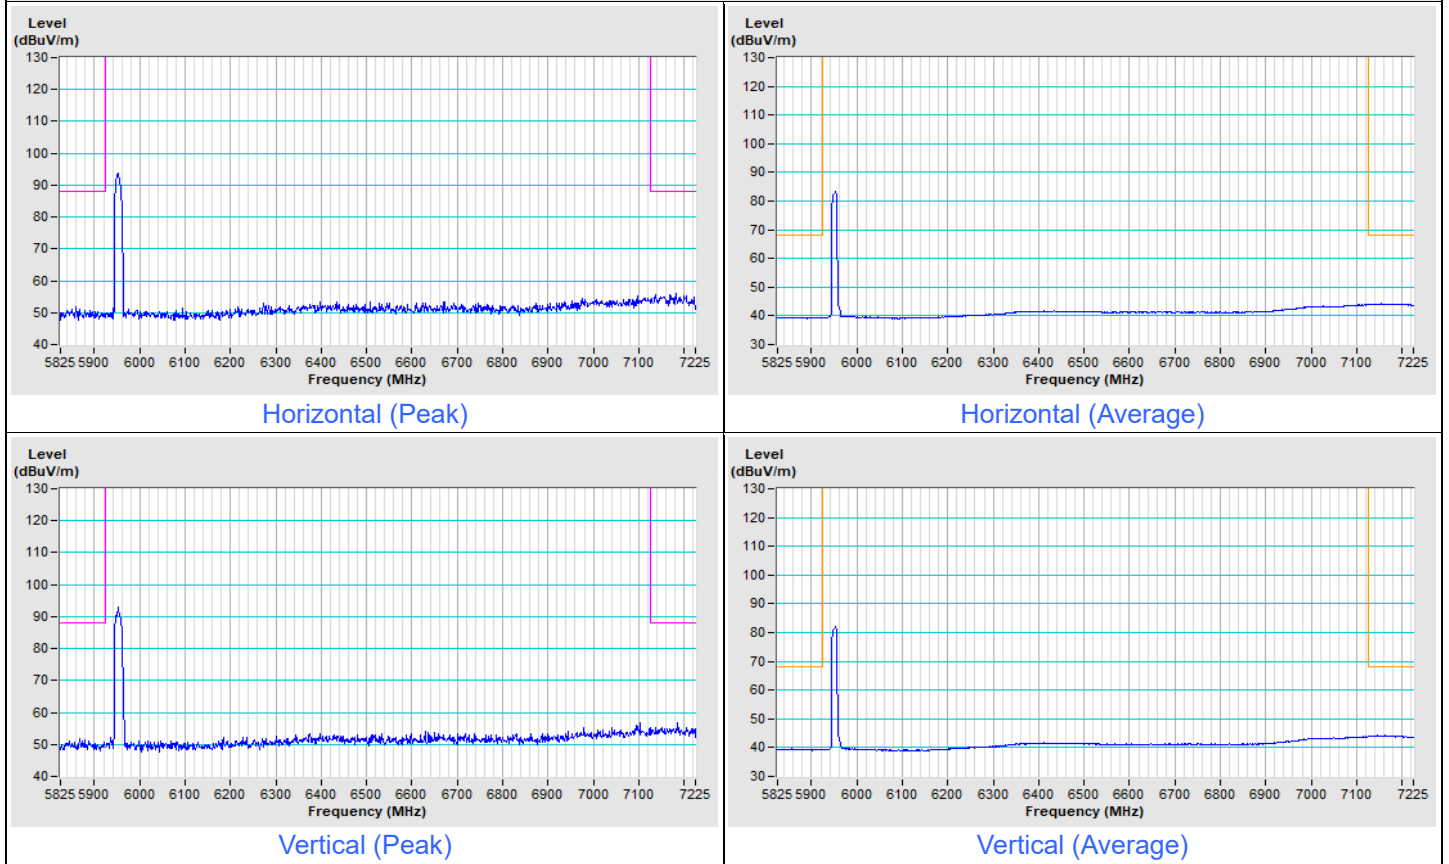


802.11be (EHT20) 106+26-tone MRU Channel 181

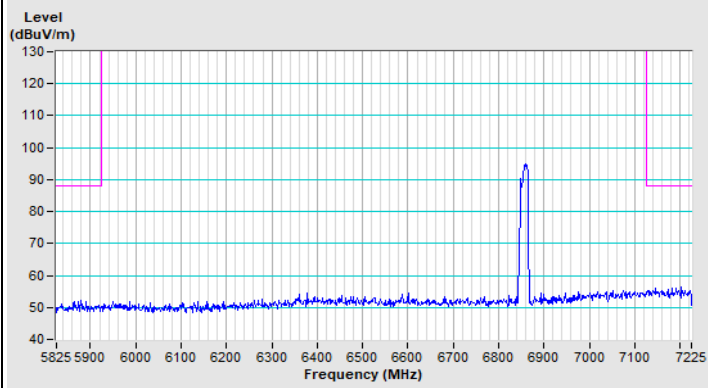


Horizontal (Peak)

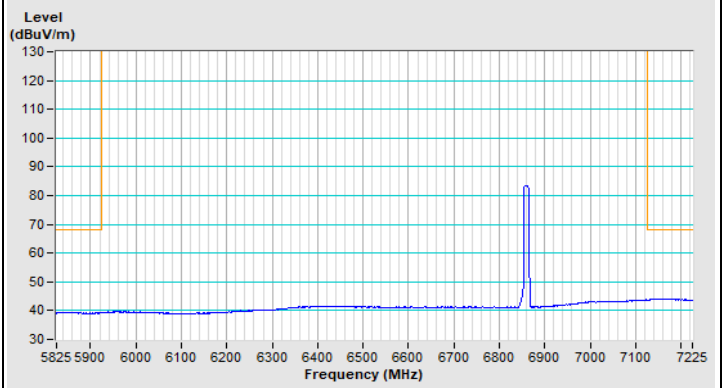

Horizontal (Average)

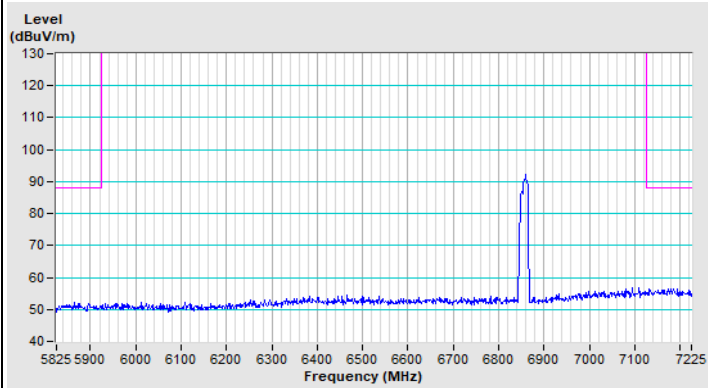


Vertical (Peak)

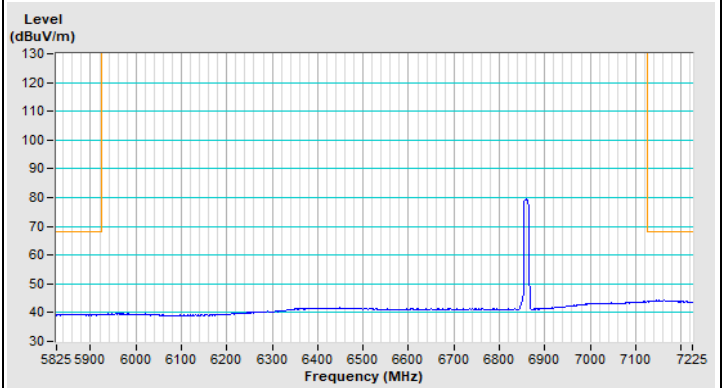


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

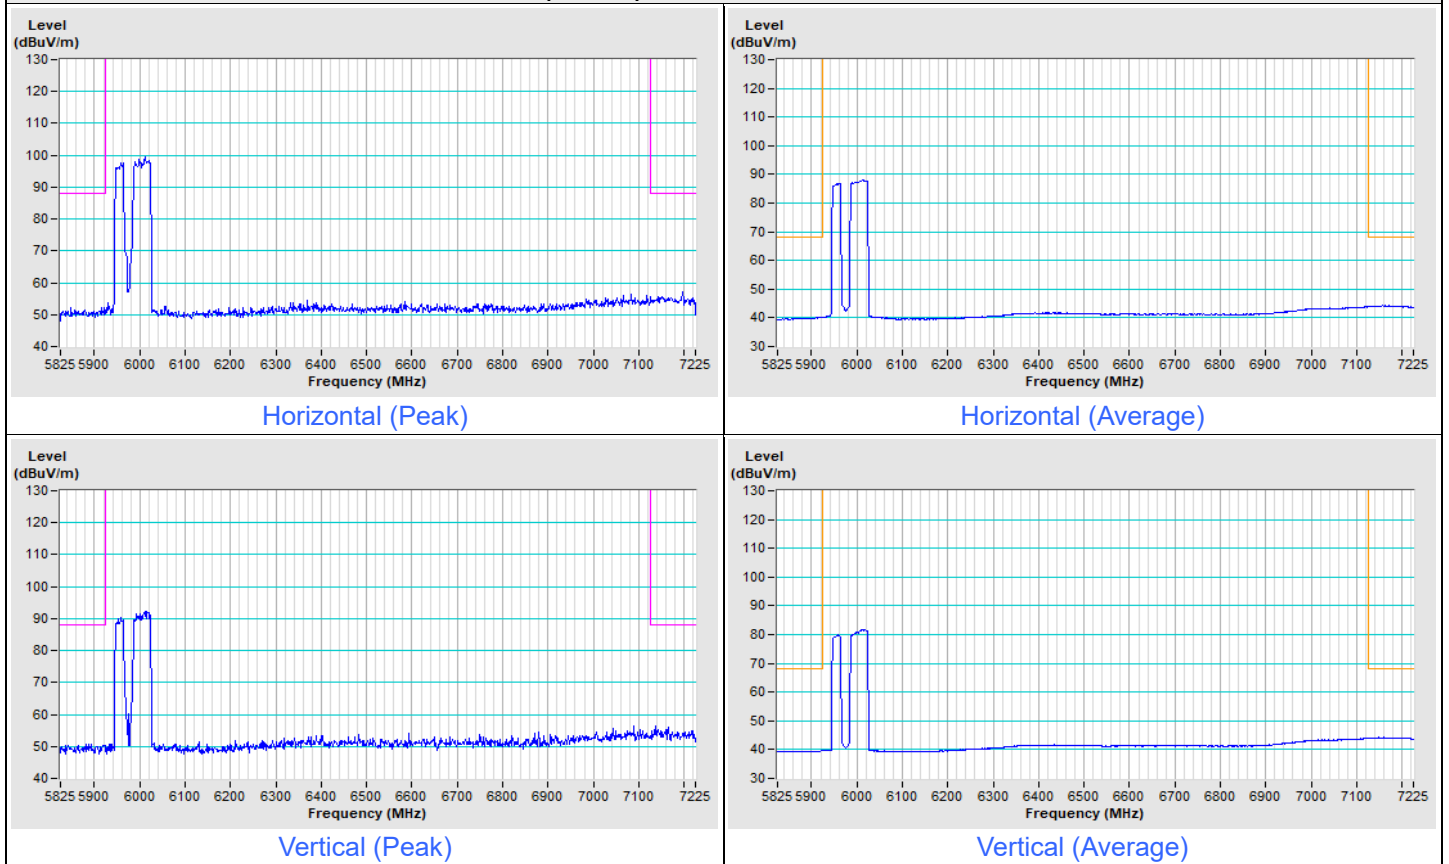


802.11be (EHT80) 484+242-tone MRU Channel 167

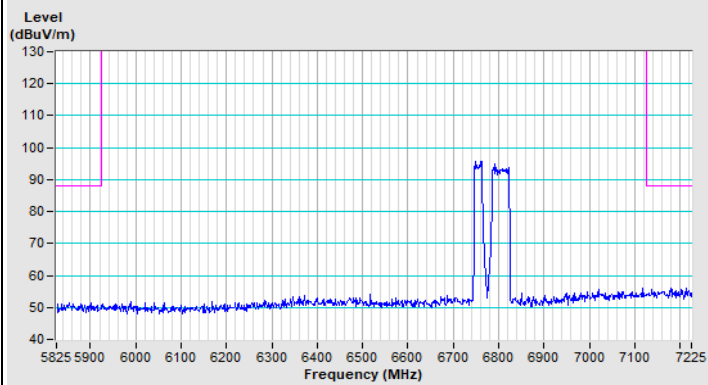


Horizontal (Peak)

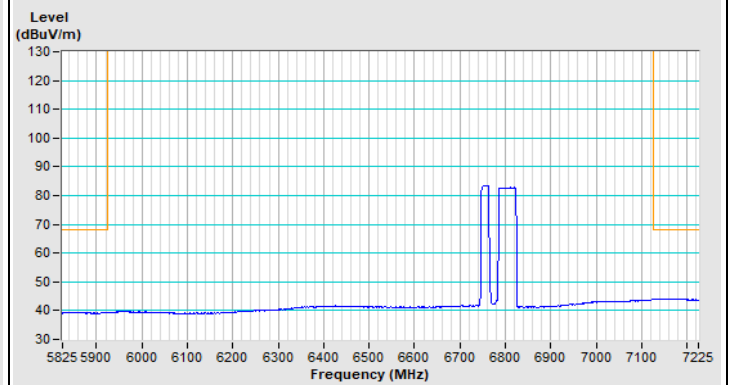

Horizontal (Average)

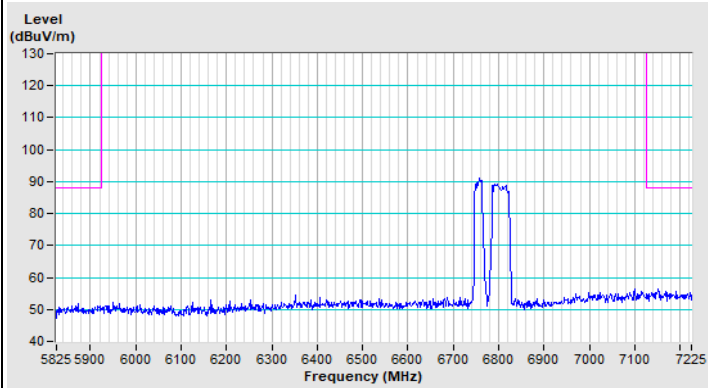


Vertical (Peak)

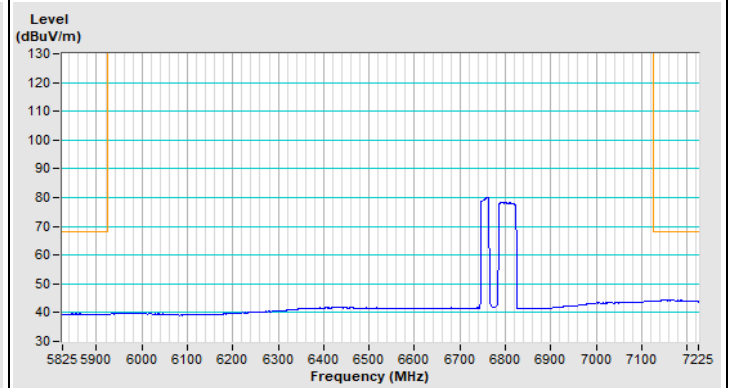


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

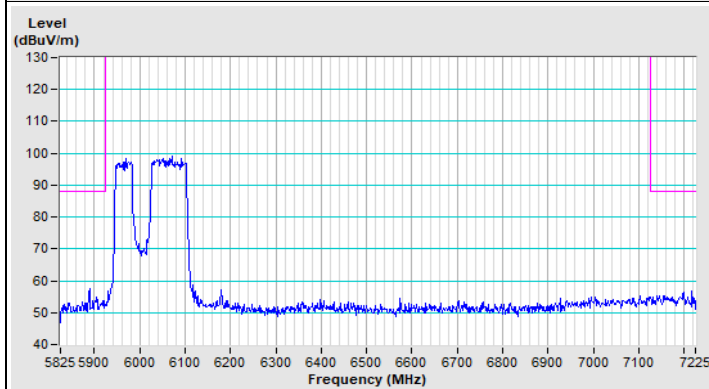


Horizontal (Peak)

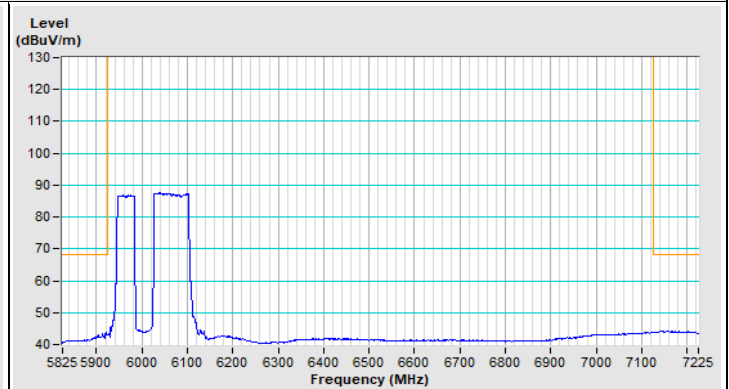

Horizontal (Average)

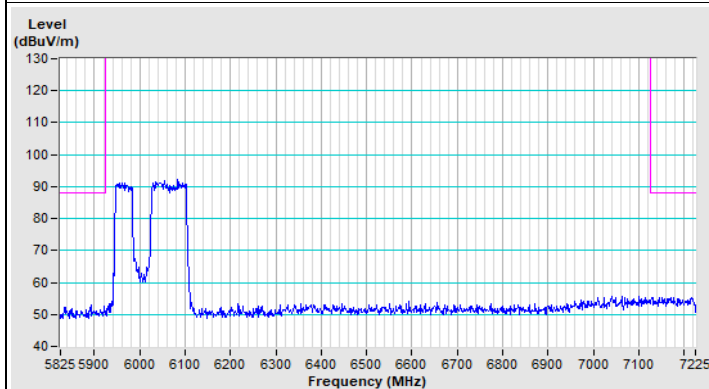


Vertical (Peak)

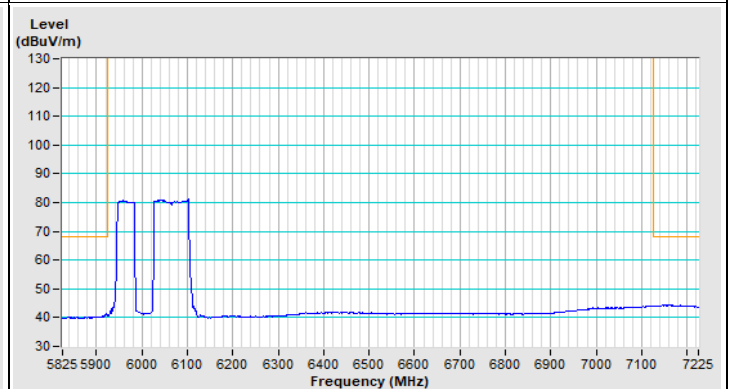


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 143

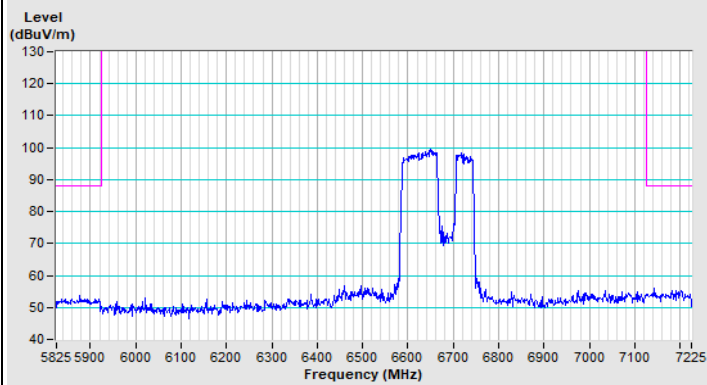


Horizontal (Peak)

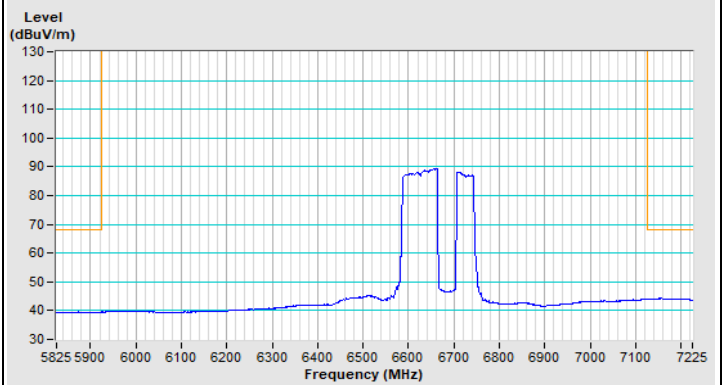

Horizontal (Average)

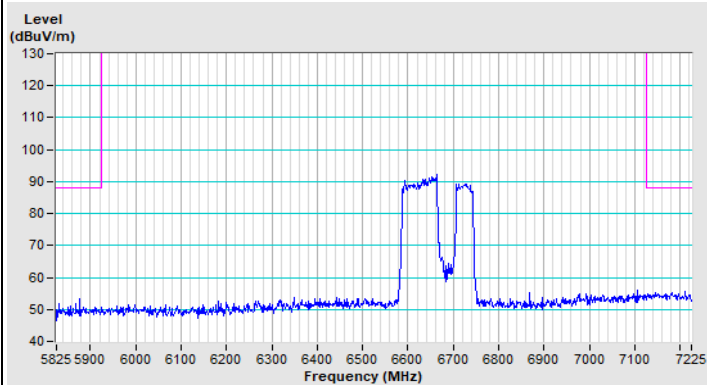


Vertical (Peak)

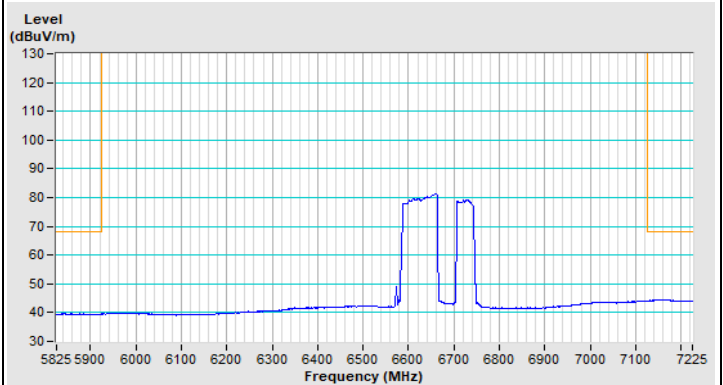


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

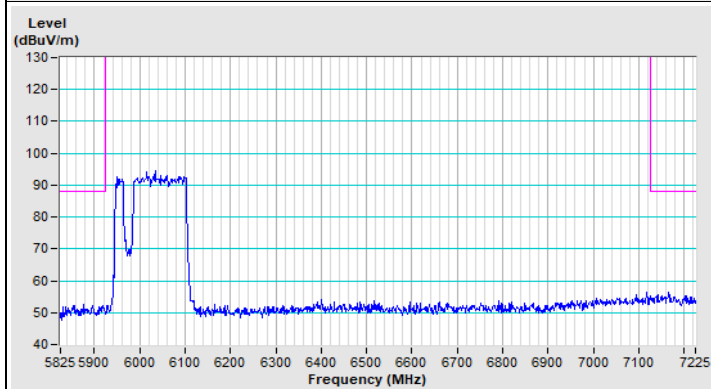


Horizontal (Peak)

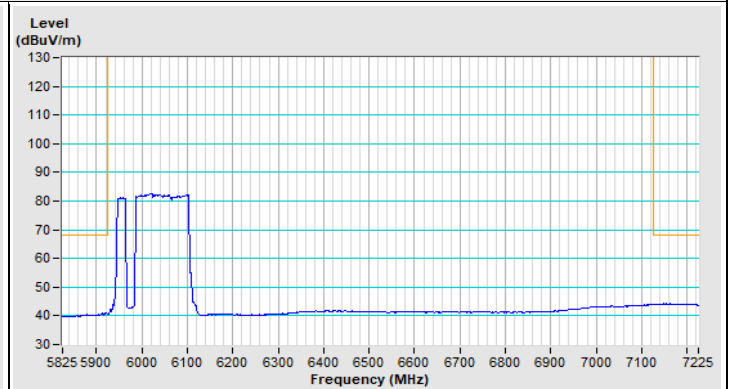

Horizontal (Average)

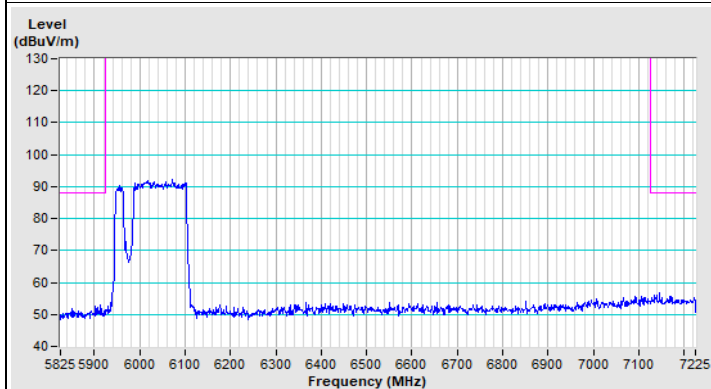


Vertical (Peak)

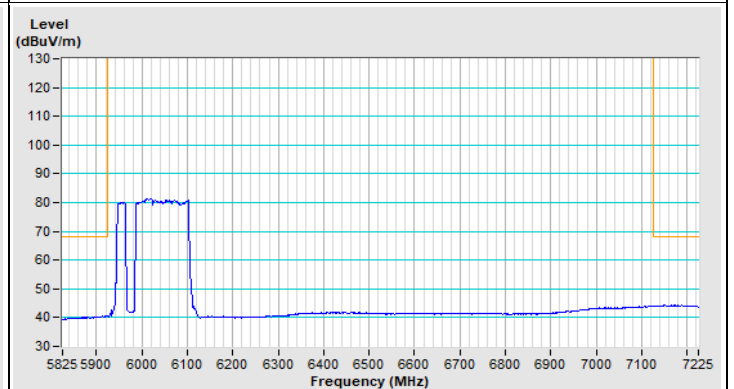


Vertical (Average)


802.11be (EHT160) 996+484+242-tone MRU Channel 143

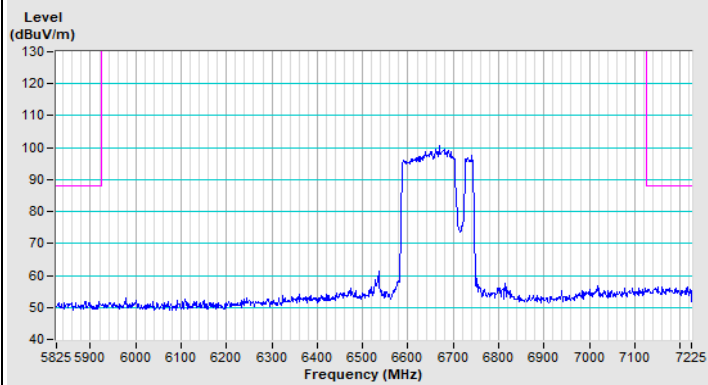


Horizontal (Peak)

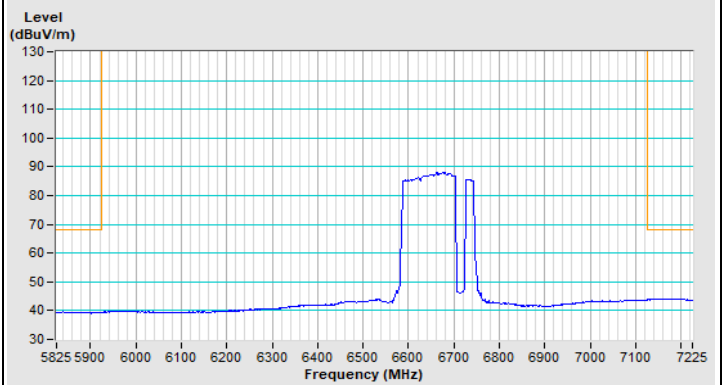

Horizontal (Average)

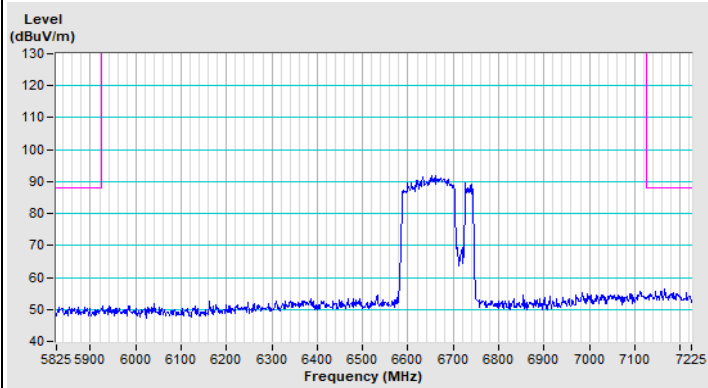

Vertical (Peak)

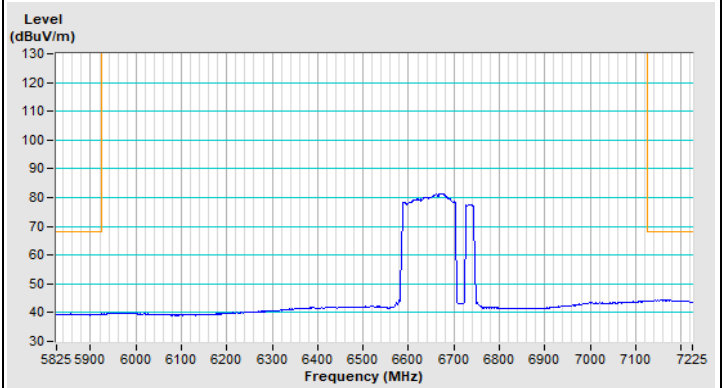

Vertical (Average)


Mode B_1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.12 H	164	45.6	5.6
2	#5925.00	39.3 AV	68.2	-28.9	1.12 H	164	33.7	5.6
3	*5955.00	90.6 PK			1.12 H	164	85.1	5.5
4	*5955.00	81.5 AV			1.12 H	164	76.0	5.5
5	11910.00	47.5 PK	74.0	-26.5	1.52 H	86	32.9	14.6
6	11910.00	35.4 AV	54.0	-18.6	1.52 H	86	20.8	14.6
7	17865.00	54.4 PK	74.0	-19.6	1.89 H	360	28.5	25.9
8	17865.00	45.9 AV	54.0	-8.1	1.89 H	360	20.0	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

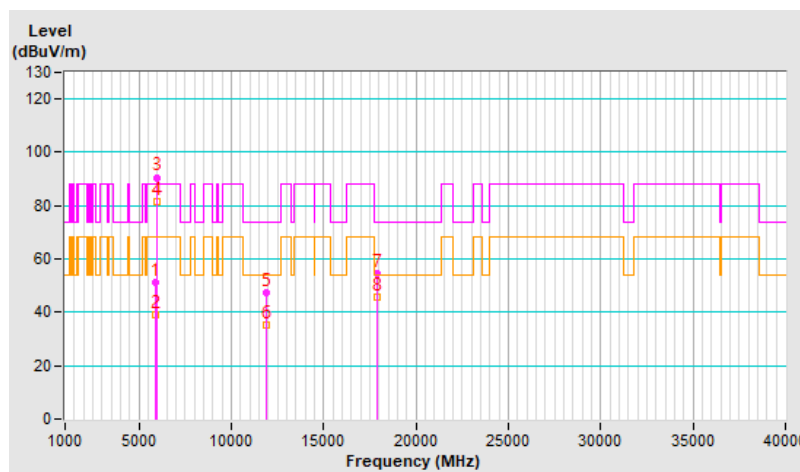


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.25 V	18	46.1	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.25 V	18	33.8	5.6
3	*5955.00	93.4 PK			1.25 V	18	87.9	5.5
4	*5955.00	84.7 AV			1.25 V	18	79.2	5.5
5	11910.00	49.6 PK	74.0	-24.4	1.17 V	31	35.0	14.6
6	11910.00	38.4 AV	54.0	-15.6	1.17 V	31	23.8	14.6
7	17865.00	57.9 PK	74.0	-16.1	1.95 V	360	32.0	25.9
8	17865.00	48.9 AV	54.0	-5.1	1.95 V	360	23.0	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

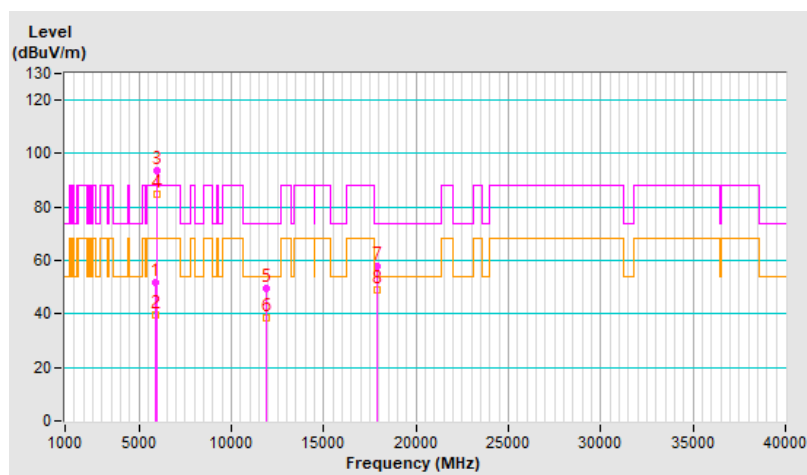


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	90.8 PK			1.11 H	172	85.0	5.8
2	*6195.00	81.5 AV			1.11 H	172	75.7	5.8
3	12390.00	47.1 PK	74.0	-26.9	1.49 H	69	32.4	14.7
4	12390.00	35.2 AV	54.0	-18.8	1.49 H	69	20.5	14.7
5	18585.00	53.8 PK	74.0	-20.2	1.98 H	357	59.3	-5.5
6	18585.00	45.5 AV	54.0	-8.5	1.98 H	357	51.0	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

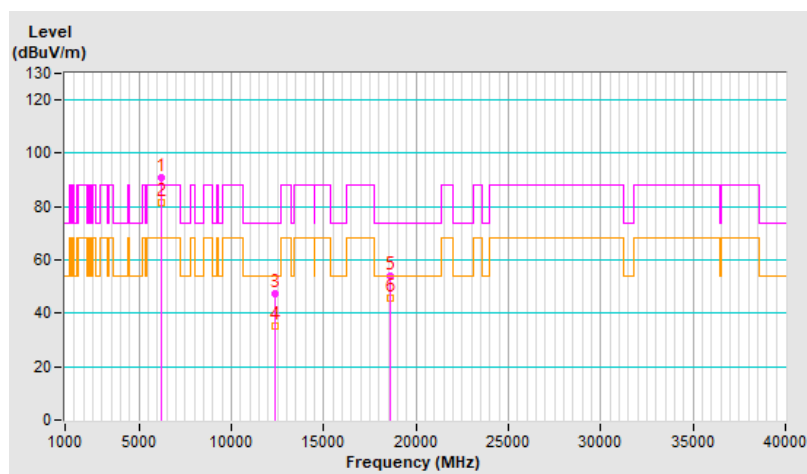


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	93.2 PK			1.27 V	14	87.4	5.8
2	*6195.00	84.7 AV			1.27 V	14	78.9	5.8
3	12390.00	49.3 PK	74.0	-24.7	1.18 V	18	34.6	14.7
4	12390.00	38.4 AV	54.0	-15.6	1.18 V	18	23.7	14.7
5	18585.00	57.1 PK	74.0	-16.9	1.99 V	360	62.6	-5.5
6	18585.00	48.3 AV	54.0	-5.7	1.99 V	360	53.8	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

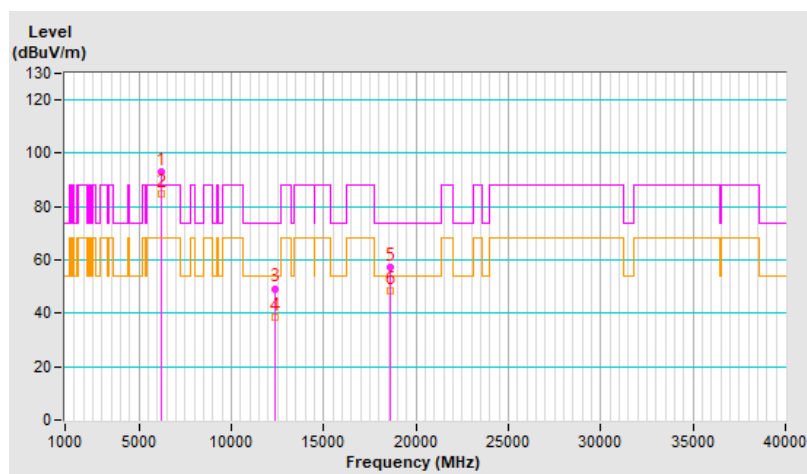


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	90.1 PK			1.13 H	166	83.3	6.8
2	*6415.00	81.3 AV			1.13 H	166	74.5	6.8
3	#12830.00	47.2 PK	88.2	-41.0	1.55 H	91	32.1	15.1
4	#12830.00	35.4 AV	68.2	-32.8	1.55 H	91	20.3	15.1
5	19245.00	53.5 PK	74.0	-20.5	1.89 H	360	58.1	-4.6
6	19245.00	45.4 AV	54.0	-8.6	1.89 H	360	50.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

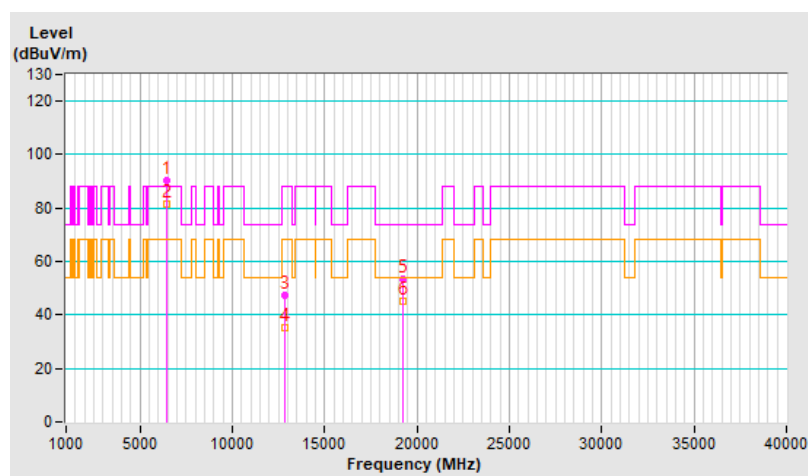


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.0 PK			1.28 V	7	86.2	6.8
2	*6415.00	84.7 AV			1.28 V	7	77.9	6.8
3	#12830.00	49.6 PK	88.2	-38.6	1.08 V	34	34.5	15.1
4	#12830.00	38.3 AV	68.2	-29.9	1.08 V	34	23.2	15.1
5	19245.00	57.1 PK	74.0	-16.9	2.01 V	347	61.7	-4.6
6	19245.00	48.4 AV	54.0	-5.6	2.01 V	347	53.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

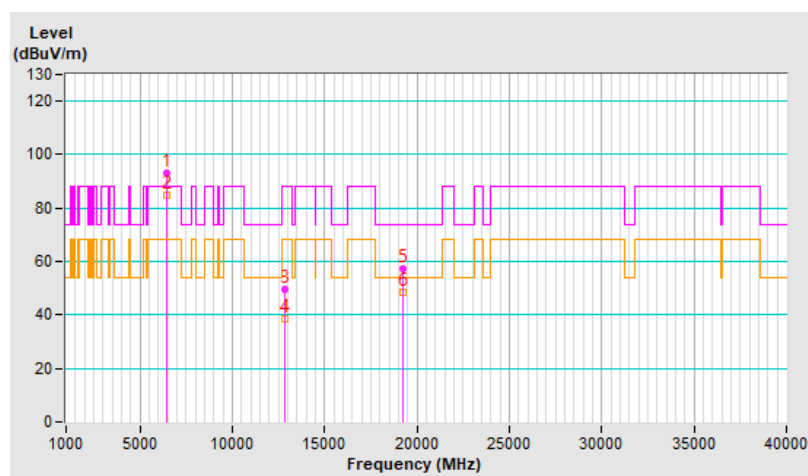


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	90.3 PK			1.10 H	159	82.9	7.4
2	*6535.00	81.2 AV			1.10 H	159	73.8	7.4
3	#13070.00	46.7 PK	88.2	-41.5	1.46 H	79	31.6	15.1
4	#13070.00	34.7 AV	68.2	-33.5	1.46 H	79	19.6	15.1
5	19605.00	54.5 PK	74.0	-19.5	1.97 H	360	59.3	-4.8
6	19605.00	46.1 AV	54.0	-7.9	1.97 H	360	50.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

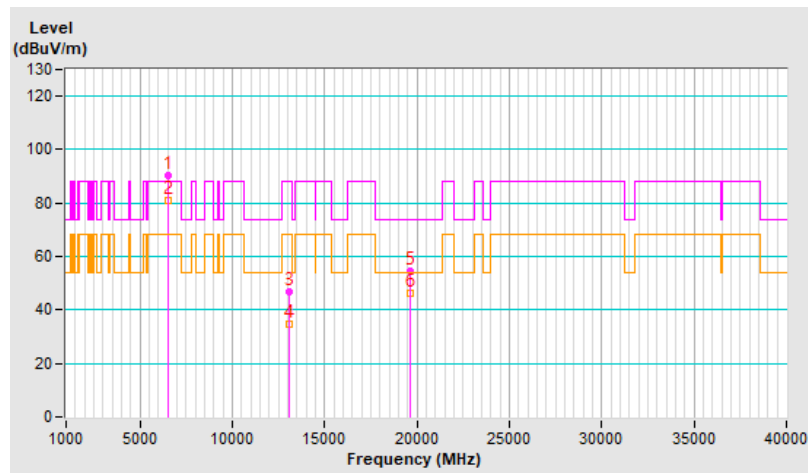


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.5 PK			1.28 V	0	86.1	7.4
2	*6535.00	84.7 AV			1.28 V	0	77.3	7.4
3	#13070.00	49.4 PK	88.2	-38.8	1.13 V	25	34.3	15.1
4	#13070.00	38.5 AV	68.2	-29.7	1.13 V	25	23.4	15.1
5	19605.00	57.6 PK	74.0	-16.4	2.02 V	340	62.4	-4.8
6	19605.00	48.6 AV	54.0	-5.4	2.02 V	340	53.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

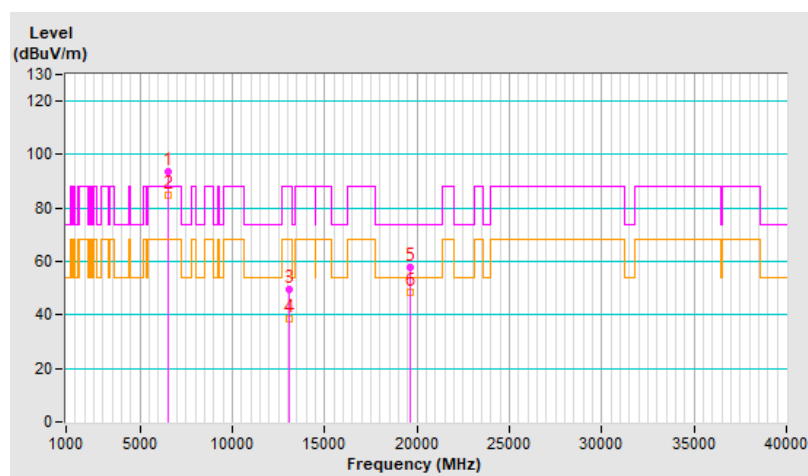


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	90.4 PK			1.09 H	177	82.7	7.7
2	*6695.00	81.6 AV			1.09 H	177	73.9	7.7
3	13390.00	47.3 PK	74.0	-26.7	1.56 H	67	31.9	15.4
4	13390.00	35.4 AV	54.0	-18.6	1.56 H	67	20.0	15.4
5	20085.00	54.4 PK	74.0	-19.6	1.90 H	360	58.7	-4.3
6	20085.00	46.3 AV	54.0	-7.7	1.90 H	360	50.6	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

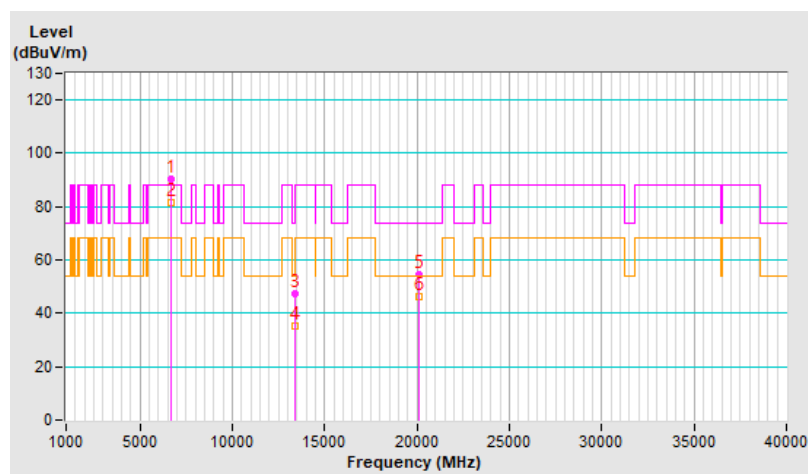


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.7 PK			1.25 V	29	85.0	7.7
2	*6695.00	84.4 AV			1.25 V	29	76.7	7.7
3	13390.00	49.9 PK	74.0	-24.1	1.17 V	40	34.5	15.4
4	13390.00	38.6 AV	54.0	-15.4	1.17 V	40	23.2	15.4
5	20085.00	57.3 PK	74.0	-16.7	1.99 V	347	61.6	-4.3
6	20085.00	48.4 AV	54.0	-5.6	1.99 V	347	52.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

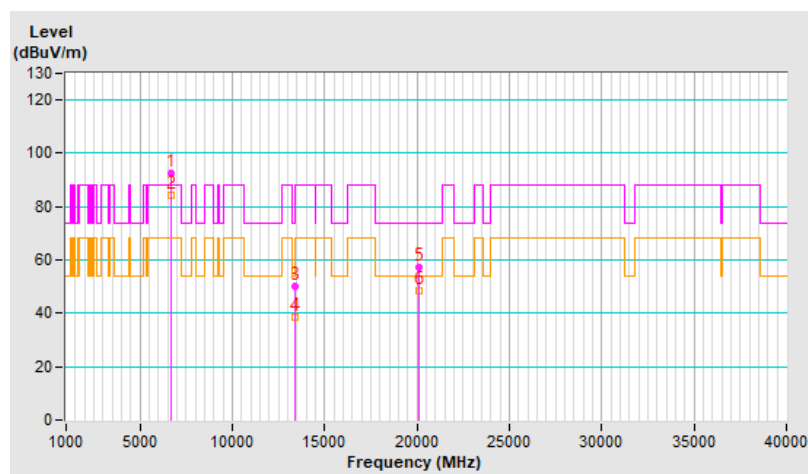


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.0 PK			2.28 H	203	86.8	8.2
2	*6855.00	84.6 AV			2.28 H	203	76.4	8.2
3	#13710.00	46.9 PK	88.2	-41.3	1.47 H	69	30.6	16.3
4	#13710.00	35.2 AV	68.2	-33.0	1.47 H	69	18.9	16.3
5	20565.00	54.0 PK	74.0	-20.0	1.95 H	360	57.7	-3.7
6	20565.00	46.0 AV	54.0	-8.0	1.95 H	360	49.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

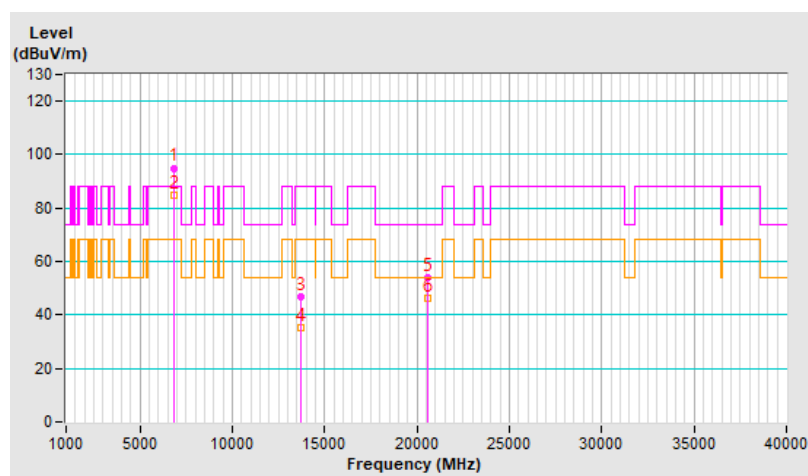


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	89.3 PK			2.13 V	340	81.1	8.2
2	*6855.00	80.9 AV			2.13 V	340	72.7	8.2
3	#13710.00	49.4 PK	88.2	-38.8	1.12 V	29	33.1	16.3
4	#13710.00	38.2 AV	68.2	-30.0	1.12 V	29	21.9	16.3
5	20565.00	57.2 PK	74.0	-16.8	2.01 V	360	60.9	-3.7
6	20565.00	48.6 AV	54.0	-5.4	2.01 V	360	52.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

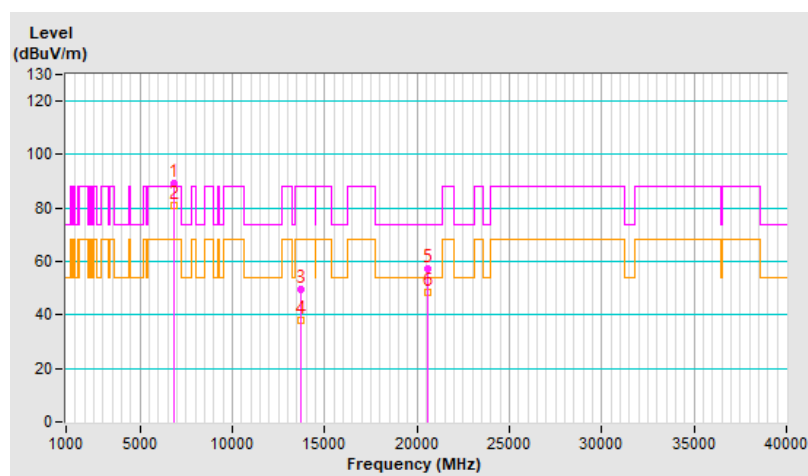


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.14 H	165	45.7	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.14 H	165	33.8	5.6
3	*5955.00	93.6 PK			1.14 H	165	88.1	5.5
4	*5955.00	82.0 AV			1.14 H	165	76.5	5.5
5	11910.00	47.5 PK	74.0	-26.5	1.51 H	73	32.9	14.6
6	11910.00	35.3 AV	54.0	-18.7	1.51 H	73	20.7	14.6
7	17865.00	53.4 PK	74.0	-20.6	2.00 H	360	27.5	25.9
8	17865.00	45.5 AV	54.0	-8.5	2.00 H	360	19.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

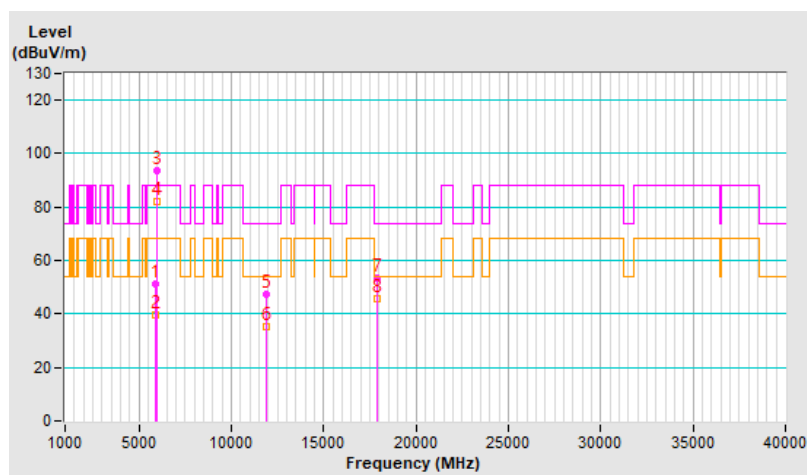


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.9 PK	88.2	-37.3	1.25 V	16	45.3	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.25 V	16	33.9	5.6
3	*5955.00	94.4 PK			1.25 V	16	88.9	5.5
4	*5955.00	84.6 AV			1.25 V	16	79.1	5.5
5	11910.00	49.7 PK	74.0	-24.3	1.14 V	41	35.1	14.6
6	11910.00	38.4 AV	54.0	-15.6	1.14 V	41	23.8	14.6
7	17865.00	58.1 PK	74.0	-15.9	2.03 V	348	32.2	25.9
8	17865.00	49.2 AV	54.0	-4.8	2.03 V	348	23.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

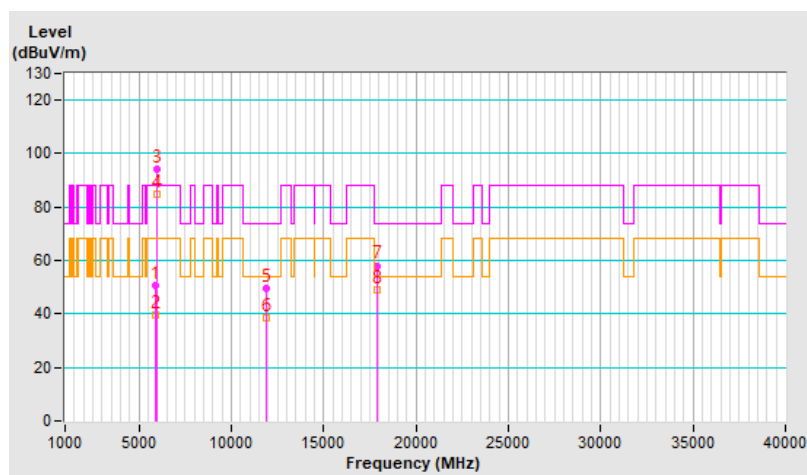


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	93.9 PK			1.16 H	174	88.1	5.8
2	*6195.00	82.4 AV			1.16 H	174	76.6	5.8
3	12390.00	46.6 PK	74.0	-27.4	1.49 H	93	31.9	14.7
4	12390.00	34.8 AV	54.0	-19.2	1.49 H	93	20.1	14.7
5	18585.00	53.6 PK	74.0	-20.4	1.93 H	360	59.1	-5.5
6	18585.00	45.7 AV	54.0	-8.3	1.93 H	360	51.2	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

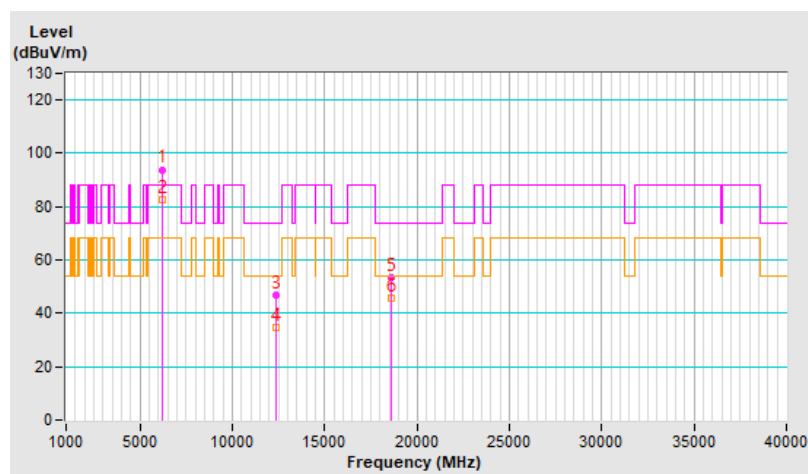


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	94.3 PK			1.28 V	14	88.5	5.8
2	*6195.00	84.7 AV			1.28 V	14	78.9	5.8
3	12390.00	50.0 PK	74.0	-24.0	1.14 V	33	35.3	14.7
4	12390.00	38.7 AV	54.0	-15.3	1.14 V	33	24.0	14.7
5	18585.00	57.9 PK	74.0	-16.1	2.03 V	352	63.4	-5.5
6	18585.00	49.2 AV	54.0	-4.8	2.03 V	352	54.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

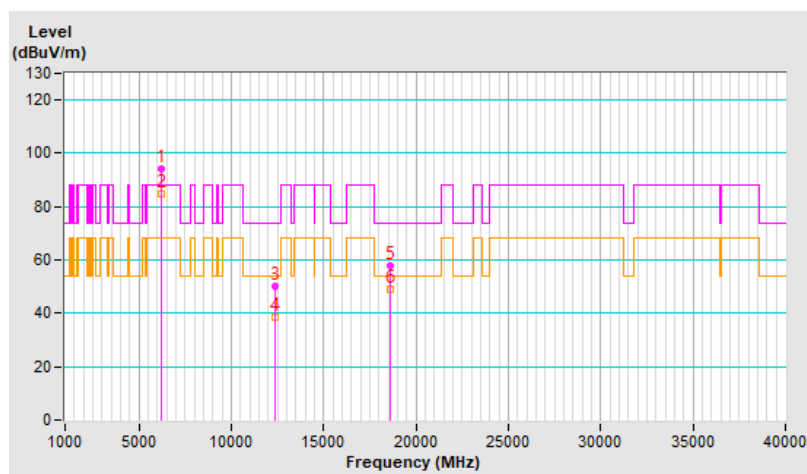


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.9 PK			1.18 H	165	87.1	6.8
2	*6415.00	82.1 AV			1.18 H	165	75.3	6.8
3	#12830.00	47.5 PK	88.2	-40.7	1.57 H	67	32.4	15.1
4	#12830.00	35.5 AV	68.2	-32.7	1.57 H	67	20.4	15.1
5	19245.00	54.1 PK	74.0	-19.9	1.97 H	360	58.7	-4.6
6	19245.00	45.6 AV	54.0	-8.4	1.97 H	360	50.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

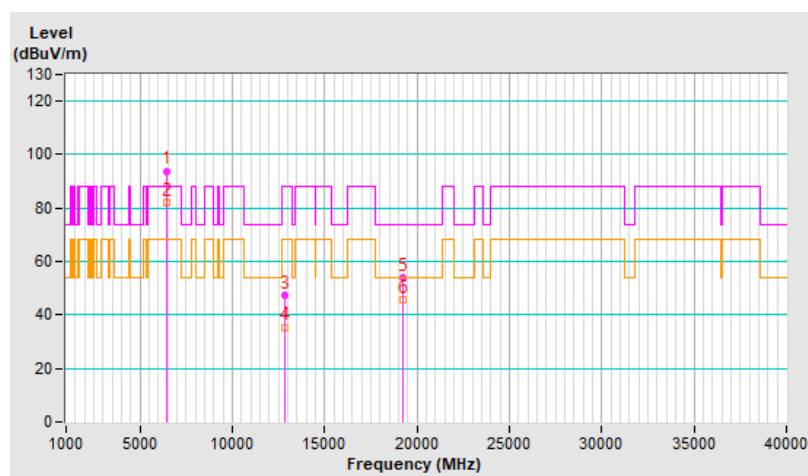


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	94.3 PK			1.21 V	11	87.5	6.8
2	*6415.00	84.7 AV			1.21 V	11	77.9	6.8
3	#12830.00	49.5 PK	88.2	-38.7	1.09 V	24	34.4	15.1
4	#12830.00	38.2 AV	68.2	-30.0	1.09 V	24	23.1	15.1
5	19245.00	57.4 PK	74.0	-16.6	2.03 V	360	62.0	-4.6
6	19245.00	48.5 AV	54.0	-5.5	2.03 V	360	53.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

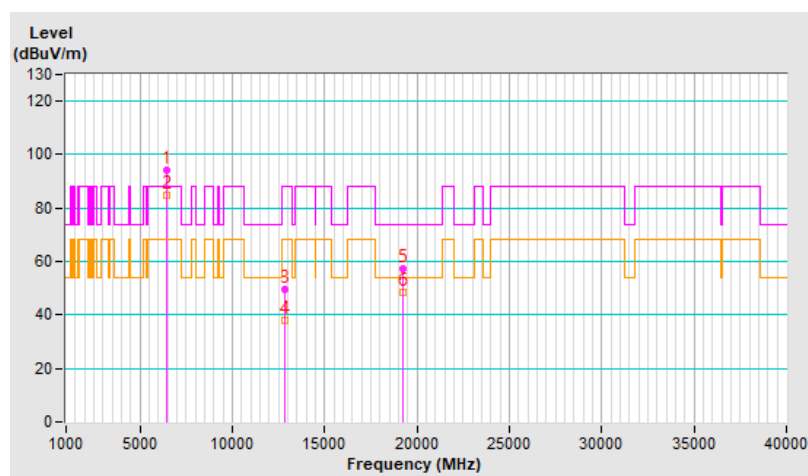


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.8 PK			1.19 H	168	86.4	7.4
2	*6535.00	82.3 AV			1.19 H	168	74.9	7.4
3	#13070.00	47.5 PK	88.2	-40.7	1.56 H	74	32.4	15.1
4	#13070.00	35.5 AV	68.2	-32.7	1.56 H	74	20.4	15.1
5	19605.00	54.0 PK	74.0	-20.0	1.93 H	360	58.8	-4.8
6	19605.00	45.7 AV	54.0	-8.3	1.93 H	360	50.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

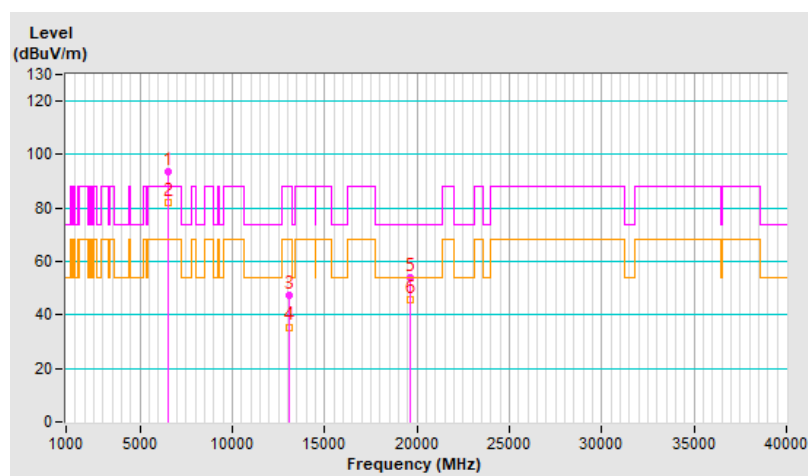


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.1 PK			1.23 V	16	86.7	7.4
2	*6535.00	84.3 AV			1.23 V	16	76.9	7.4
3	#13070.00	49.8 PK	88.2	-38.4	1.13 V	28	34.7	15.1
4	#13070.00	38.6 AV	68.2	-29.6	1.13 V	28	23.5	15.1
5	19605.00	57.8 PK	74.0	-16.2	2.07 V	349	62.6	-4.8
6	19605.00	49.2 AV	54.0	-4.8	2.07 V	349	54.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

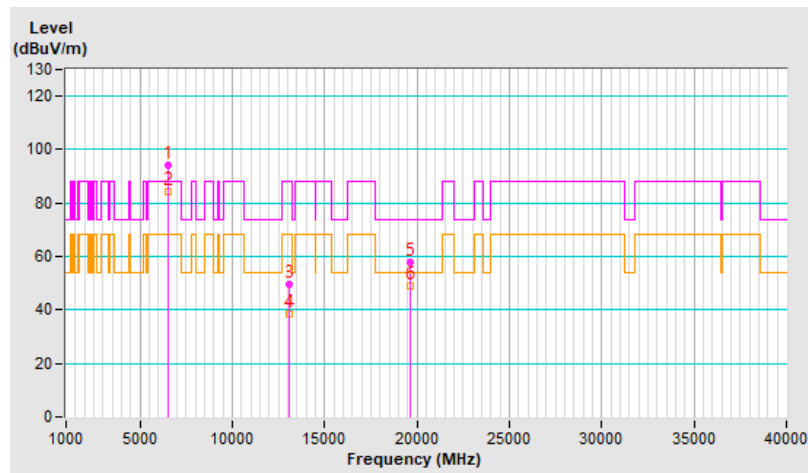


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	93.4 PK			1.18 H	150	85.7	7.7
2	*6695.00	81.7 AV			1.18 H	150	74.0	7.7
3	13390.00	46.9 PK	74.0	-27.1	1.49 H	78	31.5	15.4
4	13390.00	35.1 AV	54.0	-18.9	1.49 H	78	19.7	15.4
5	20085.00	54.1 PK	74.0	-19.9	1.93 H	360	58.4	-4.3
6	20085.00	45.6 AV	54.0	-8.4	1.93 H	360	49.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

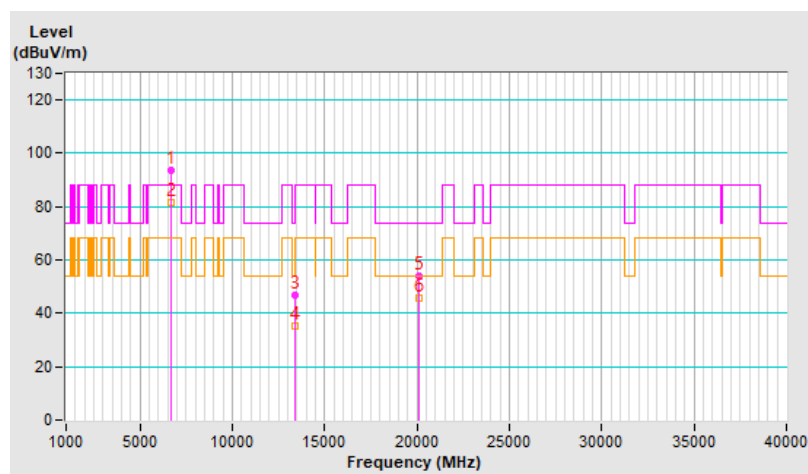


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	94.4 PK			1.18 V	7	86.7	7.7
2	*6695.00	84.7 AV			1.18 V	7	77.0	7.7
3	13390.00	50.2 PK	74.0	-23.8	1.15 V	22	34.8	15.4
4	13390.00	38.9 AV	54.0	-15.1	1.15 V	22	23.5	15.4
5	20085.00	57.5 PK	74.0	-16.5	1.95 V	360	61.8	-4.3
6	20085.00	48.8 AV	54.0	-5.2	1.95 V	360	53.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

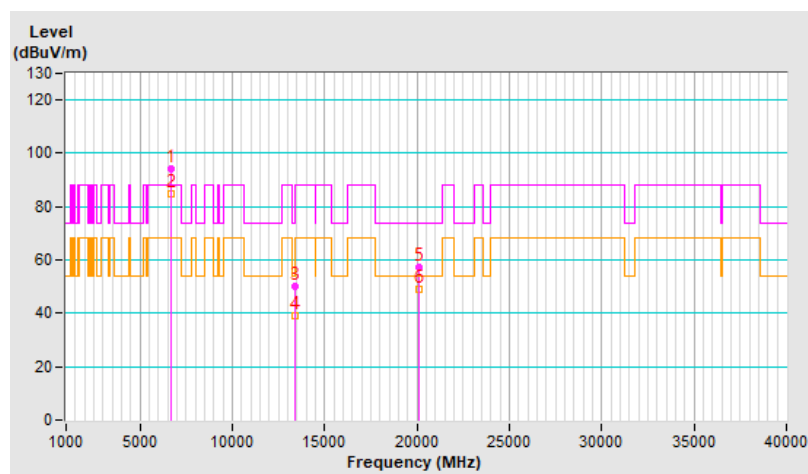


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.4 PK			2.26 H	202	87.2	8.2
2	*6855.00	84.7 AV			2.26 H	202	76.5	8.2
3	#13710.00	46.7 PK	88.2	-41.5	1.47 H	89	30.4	16.3
4	#13710.00	34.7 AV	68.2	-33.5	1.47 H	89	18.4	16.3
5	20565.00	54.2 PK	74.0	-19.8	1.94 H	360	57.9	-3.7
6	20565.00	46.0 AV	54.0	-8.0	1.94 H	360	49.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

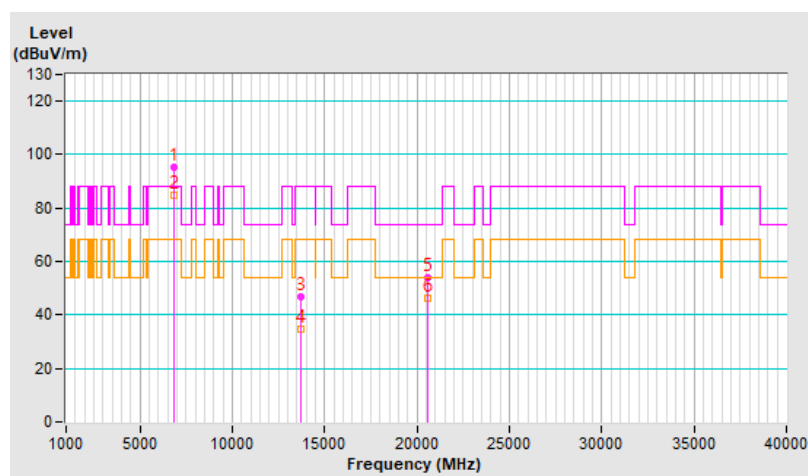


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.7 PK			1.41 V	339	83.5	8.2
2	*6855.00	81.7 AV			1.41 V	339	73.5	8.2
3	#13710.00	49.6 PK	88.2	-38.6	1.08 V	23	33.3	16.3
4	#13710.00	38.2 AV	68.2	-30.0	1.08 V	23	21.9	16.3
5	20565.00	57.1 PK	74.0	-16.9	2.07 V	337	60.8	-3.7
6	20565.00	48.5 AV	54.0	-5.5	2.07 V	337	52.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

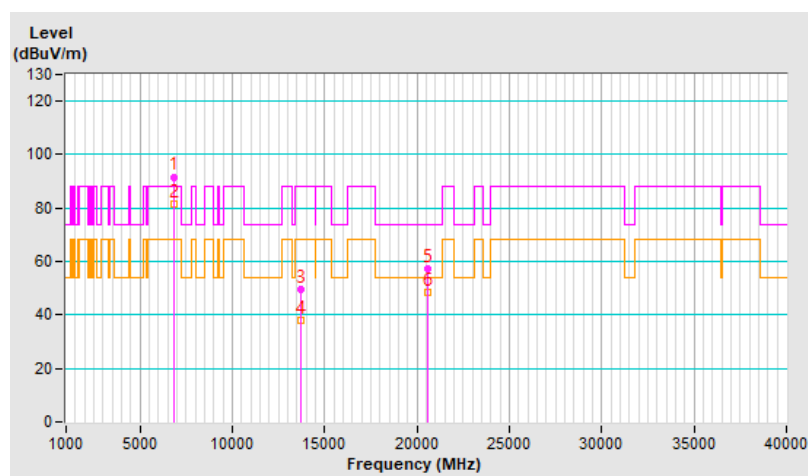


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.7 PK	88.2	-37.5	1.23 H	167	45.1	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.23 H	167	33.8	5.6
3	*5965.00	92.4 PK			1.23 H	167	86.9	5.5
4	*5965.00	81.9 AV			1.23 H	167	76.4	5.5
5	11930.00	47.0 PK	74.0	-27.0	1.47 H	83	32.5	14.5
6	11930.00	34.9 AV	54.0	-19.1	1.47 H	83	20.4	14.5
7	17895.00	54.2 PK	74.0	-19.8	1.89 H	360	27.8	26.4
8	17895.00	45.8 AV	54.0	-8.2	1.89 H	360	19.4	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

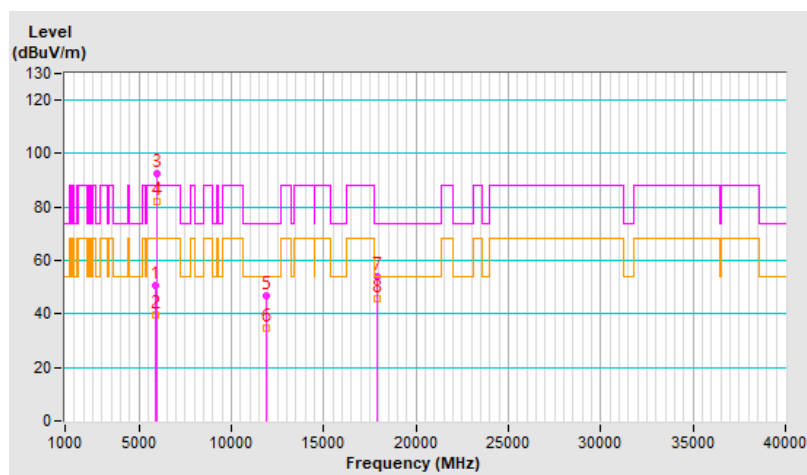


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.52 V	31	45.2	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.52 V	31	34.0	5.6
3	*5965.00	92.6 PK			1.52 V	31	87.1	5.5
4	*5965.00	83.9 AV			1.52 V	31	78.4	5.5
5	11930.00	50.2 PK	74.0	-23.8	1.12 V	23	35.7	14.5
6	11930.00	38.9 AV	54.0	-15.1	1.12 V	23	24.4	14.5
7	17895.00	56.9 PK	74.0	-17.1	2.02 V	351	30.5	26.4
8	17895.00	48.3 AV	54.0	-5.7	2.02 V	351	21.9	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

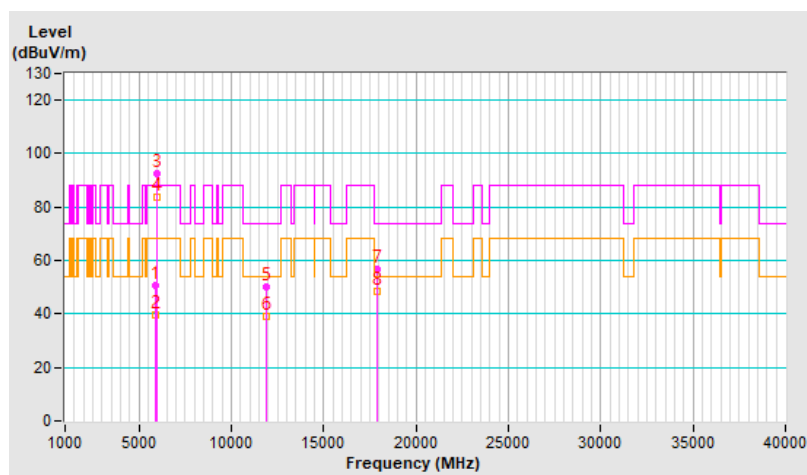


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	92.6 PK			1.29 H	161	86.7	5.9
2	*6205.00	81.8 AV			1.29 H	161	75.9	5.9
3	12410.00	46.8 PK	74.0	-27.2	1.56 H	81	32.1	14.7
4	12410.00	34.8 AV	54.0	-19.2	1.56 H	81	20.1	14.7
5	18615.00	54.0 PK	74.0	-20.0	1.98 H	360	59.4	-5.4
6	18615.00	45.6 AV	54.0	-8.4	1.98 H	360	51.0	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

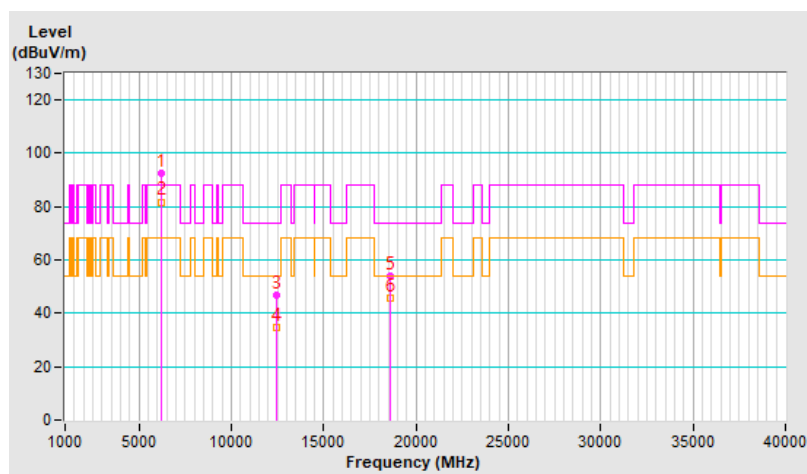


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	93.3 PK			1.53 V	24	87.4	5.9
2	*6205.00	84.3 AV			1.53 V	24	78.4	5.9
3	12410.00	50.0 PK	74.0	-24.0	1.10 V	33	35.3	14.7
4	12410.00	38.7 AV	54.0	-15.3	1.10 V	33	24.0	14.7
5	18615.00	57.9 PK	74.0	-16.1	2.02 V	340	63.3	-5.4
6	18615.00	48.9 AV	54.0	-5.1	2.02 V	340	54.3	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

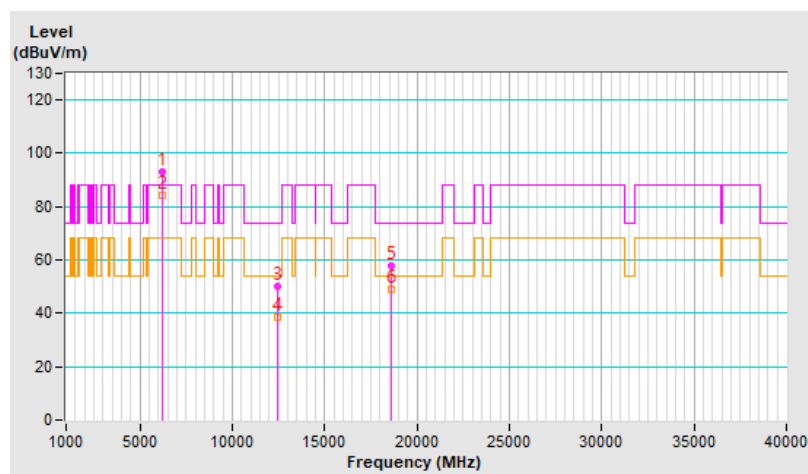


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	92.6 PK			1.29 H	154	85.9	6.7
2	*6405.00	81.9 AV			1.29 H	154	75.2	6.7
3	#12810.00	46.5 PK	88.2	-41.7	1.54 H	84	31.4	15.1
4	#12810.00	34.9 AV	68.2	-33.3	1.54 H	84	19.8	15.1
5	19215.00	54.5 PK	74.0	-19.5	1.96 H	360	59.2	-4.7
6	19215.00	46.0 AV	54.0	-8.0	1.96 H	360	50.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

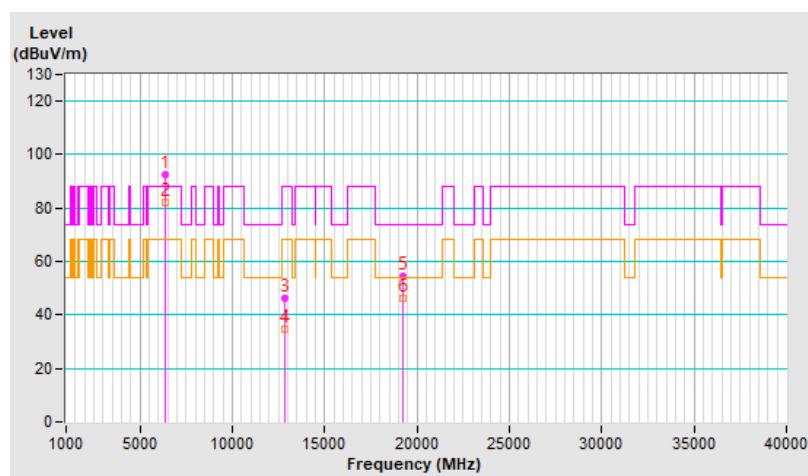


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	92.9 PK			1.49 V	33	86.2	6.7
2	*6405.00	84.2 AV			1.49 V	33	77.5	6.7
3	#12810.00	50.4 PK	88.2	-37.8	1.14 V	11	35.3	15.1
4	#12810.00	39.0 AV	68.2	-29.2	1.14 V	11	23.9	15.1
5	19215.00	57.5 PK	74.0	-16.5	1.99 V	360	62.2	-4.7
6	19215.00	48.8 AV	54.0	-5.2	1.99 V	360	53.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

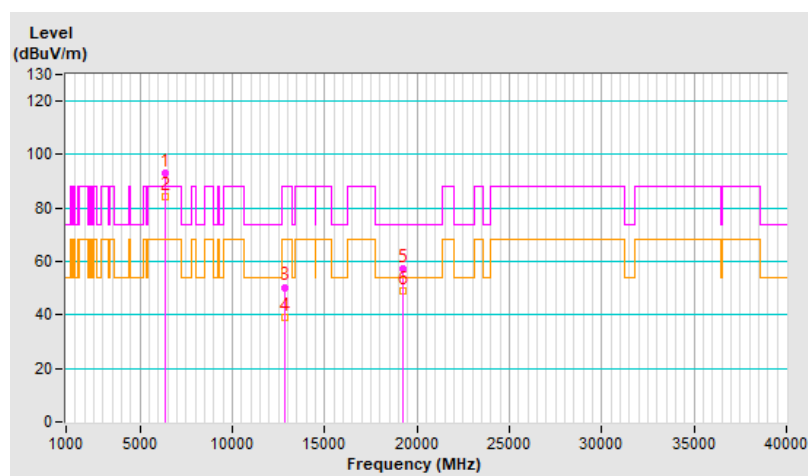


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	92.5 PK			1.27 H	172	85.0	7.5
2	*6565.00	81.9 AV			1.27 H	172	74.4	7.5
3	#13130.00	46.9 PK	88.2	-41.3	1.54 H	93	31.6	15.3
4	#13130.00	35.1 AV	68.2	-33.1	1.54 H	93	19.8	15.3
5	19695.00	54.6 PK	74.0	-19.4	1.99 H	360	59.0	-4.4
6	19695.00	46.2 AV	54.0	-7.8	1.99 H	360	50.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

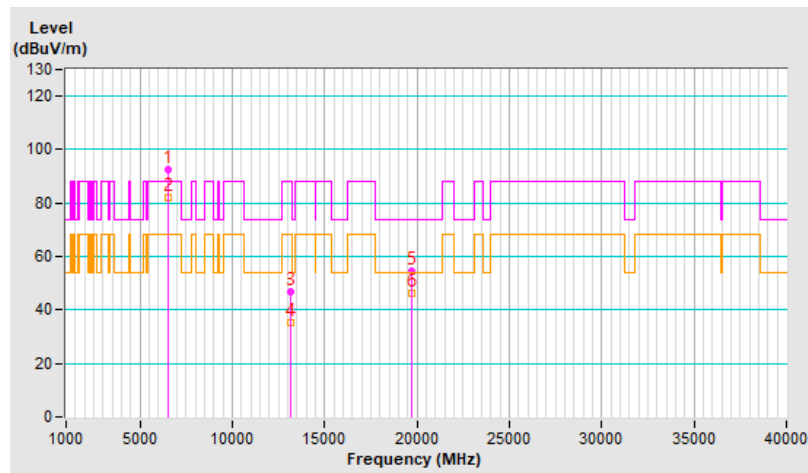


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	92.2 PK			1.57 V	34	84.7	7.5
2	*6565.00	83.7 AV			1.57 V	34	76.2	7.5
3	#13130.00	49.8 PK	88.2	-38.4	1.10 V	19	34.5	15.3
4	#13130.00	39.0 AV	68.2	-29.2	1.10 V	19	23.7	15.3
5	19695.00	57.4 PK	74.0	-16.6	2.04 V	352	61.8	-4.4
6	19695.00	48.9 AV	54.0	-5.1	2.04 V	352	53.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

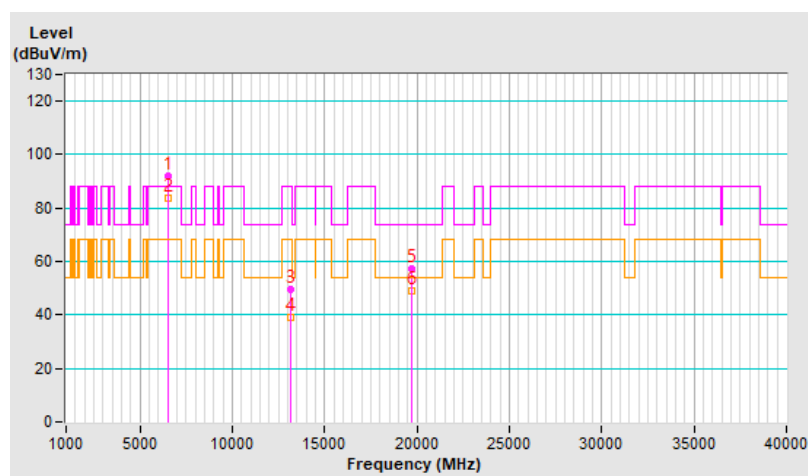


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	92.3 PK			1.28 H	176	84.6	7.7
2	*6685.00	81.6 AV			1.28 H	176	73.9	7.7
3	13370.00	47.1 PK	74.0	-26.9	1.46 H	72	31.8	15.3
4	13370.00	35.1 AV	54.0	-18.9	1.46 H	72	19.8	15.3
5	20055.00	53.6 PK	74.0	-20.4	1.97 H	360	58.0	-4.4
6	20055.00	45.5 AV	54.0	-8.5	1.97 H	360	49.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

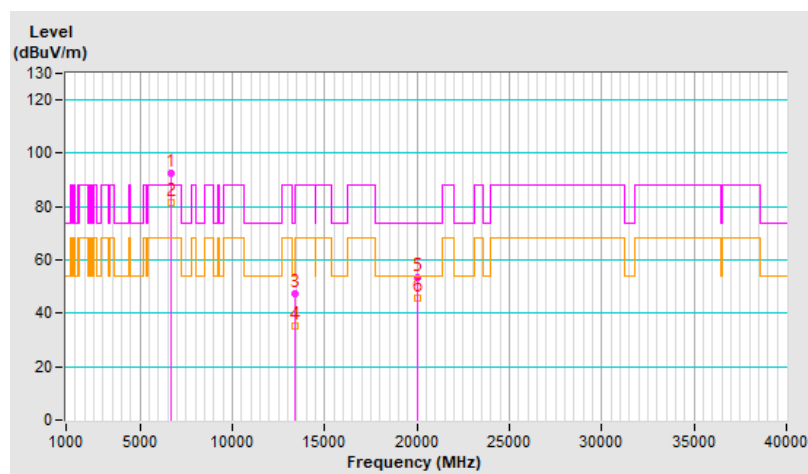


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	92.3 PK			1.54 V	27	84.6	7.7
2	*6685.00	83.5 AV			1.54 V	27	75.8	7.7
3	13370.00	49.4 PK	74.0	-24.6	1.14 V	11	34.1	15.3
4	13370.00	38.1 AV	54.0	-15.9	1.14 V	11	22.8	15.3
5	20055.00	57.3 PK	74.0	-16.7	2.02 V	343	61.7	-4.4
6	20055.00	48.3 AV	54.0	-5.7	2.02 V	343	52.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

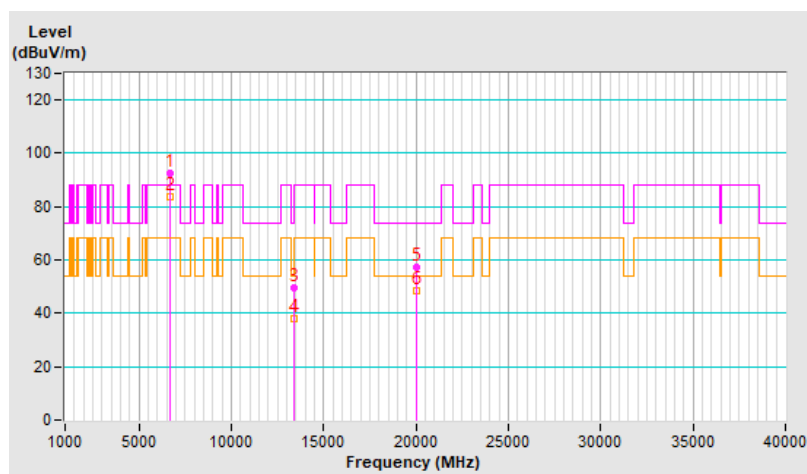


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	94.8 PK			2.21 H	199	86.6	8.2
2	*6845.00	84.4 AV			2.21 H	199	76.2	8.2
3	#13690.00	46.3 PK	88.2	-41.9	1.46 H	83	30.0	16.3
4	#13690.00	34.7 AV	68.2	-33.5	1.46 H	83	18.4	16.3
5	20535.00	54.3 PK	74.0	-19.7	1.94 H	360	58.0	-3.7
6	20535.00	45.8 AV	54.0	-8.2	1.94 H	360	49.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

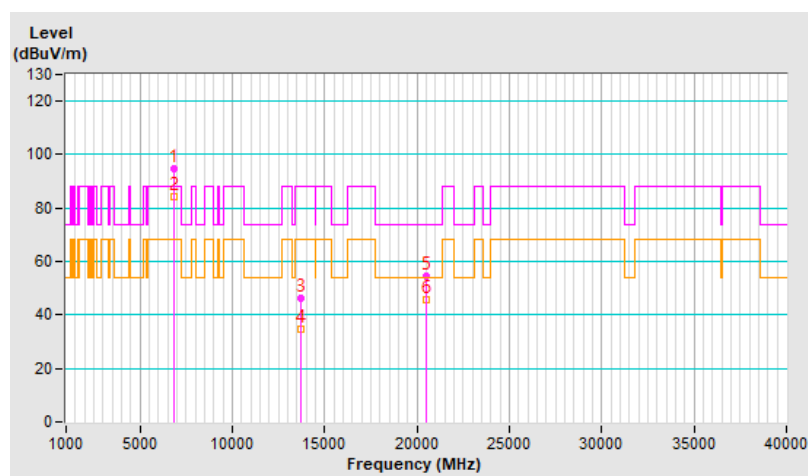


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	90.6 PK			1.50 V	342	82.4	8.2
2	*6845.00	81.9 AV			1.50 V	342	73.7	8.2
3	#13690.00	49.6 PK	88.2	-38.6	1.09 V	35	33.3	16.3
4	#13690.00	38.6 AV	68.2	-29.6	1.09 V	35	22.3	16.3
5	20535.00	57.4 PK	74.0	-16.6	2.06 V	360	61.1	-3.7
6	20535.00	48.7 AV	54.0	-5.3	2.06 V	360	52.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

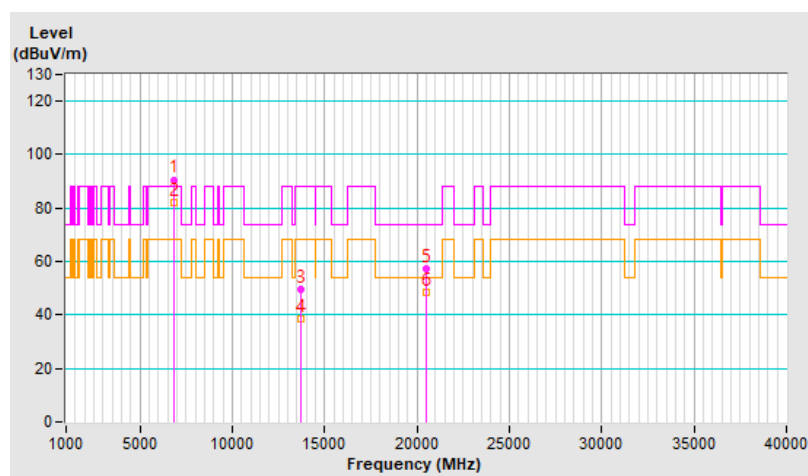


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.06 H	165	46.5	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.06 H	165	33.9	5.6
3	*5985.00	94.6 PK			1.06 H	165	89.1	5.5
4	*5985.00	82.2 AV			1.06 H	165	76.7	5.5
5	11970.00	46.4 PK	74.0	-27.6	1.45 H	89	31.9	14.5
6	11970.00	34.7 AV	54.0	-19.3	1.45 H	89	20.2	14.5
7	17955.00	54.3 PK	74.0	-19.7	1.98 H	360	26.0	28.3
8	17955.00	46.1 AV	54.0	-7.9	1.98 H	360	17.8	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

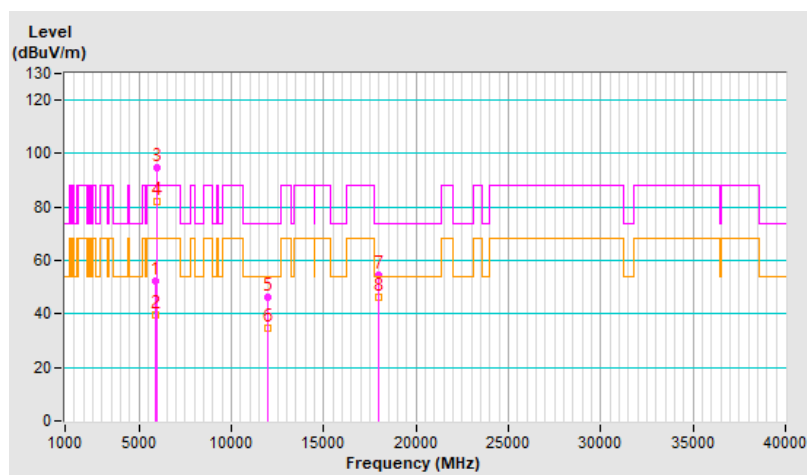


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.35 V	17	46.0	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.35 V	17	34.1	5.6
3	*5985.00	96.0 PK			1.35 V	17	90.5	5.5
4	*5985.00	85.1 AV			1.35 V	17	79.6	5.5
5	11970.00	50.0 PK	74.0	-24.0	1.09 V	31	35.5	14.5
6	11970.00	38.7 AV	54.0	-15.3	1.09 V	31	24.2	14.5
7	17955.00	58.3 PK	74.0	-15.7	1.98 V	343	30.0	28.3
8	17955.00	49.3 AV	54.0	-4.7	1.98 V	343	21.0	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

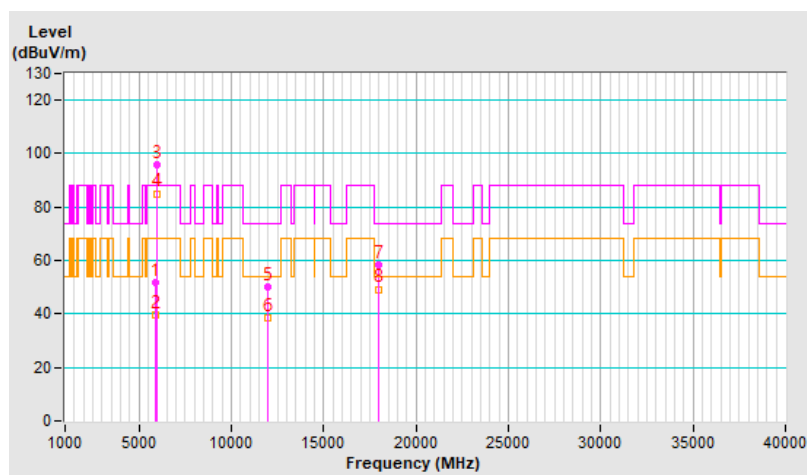


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	94.3 PK			1.06 H	181	88.4	5.9
2	*6225.00	82.1 AV			1.06 H	181	76.2	5.9
3	12450.00	47.6 PK	74.0	-26.4	1.48 H	70	33.0	14.6
4	12450.00	35.5 AV	54.0	-18.5	1.48 H	70	20.9	14.6
5	18675.00	54.5 PK	74.0	-19.5	1.94 H	360	59.8	-5.3
6	18675.00	46.3 AV	54.0	-7.7	1.94 H	360	51.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

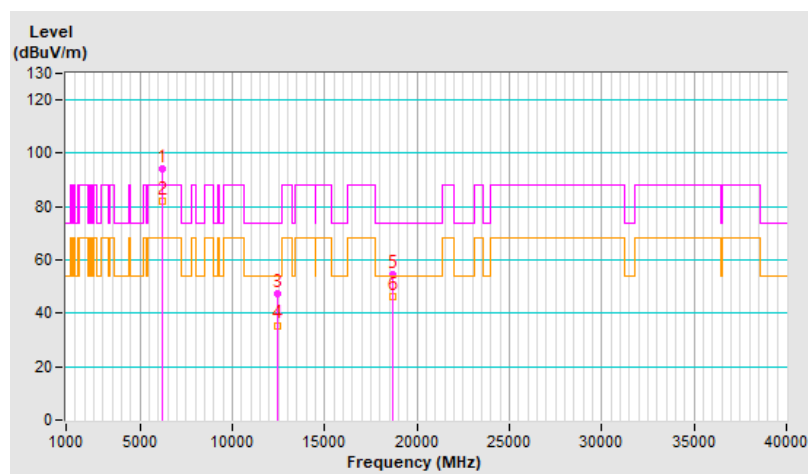


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	95.7 PK			1.31 V	18	89.8	5.9
2	*6225.00	84.8 AV			1.31 V	18	78.9	5.9
3	12450.00	49.8 PK	74.0	-24.2	1.14 V	39	35.2	14.6
4	12450.00	38.8 AV	54.0	-15.2	1.14 V	39	24.2	14.6
5	18675.00	58.0 PK	74.0	-16.0	2.05 V	346	63.3	-5.3
6	18675.00	49.2 AV	54.0	-4.8	2.05 V	346	54.5	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

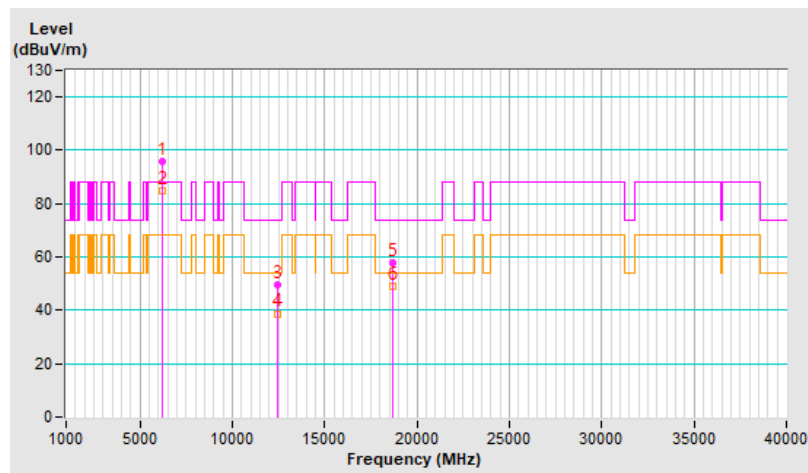


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	94.2 PK			1.00 H	174	87.6	6.6
2	*6385.00	82.0 AV			1.00 H	174	75.4	6.6
3	#12770.00	47.2 PK	88.2	-41.0	1.51 H	68	32.3	14.9
4	#12770.00	35.1 AV	68.2	-33.1	1.51 H	68	20.2	14.9
5	19155.00	54.5 PK	74.0	-19.5	1.90 H	358	59.2	-4.7
6	19155.00	46.3 AV	54.0	-7.7	1.90 H	358	51.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

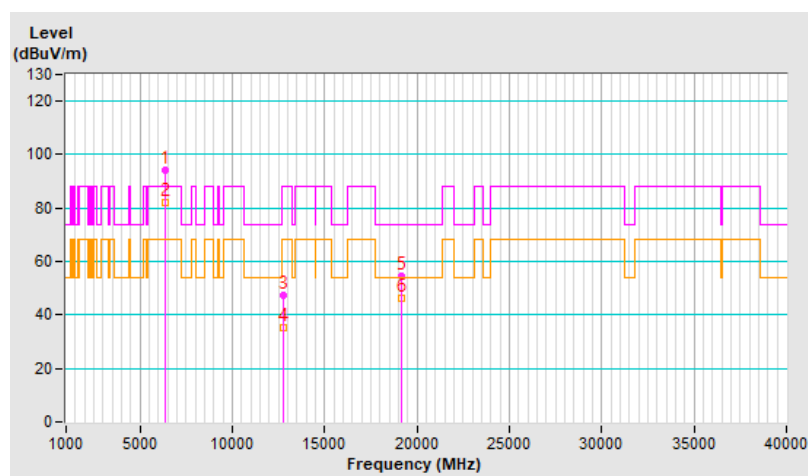


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	96.6 PK			1.31 V	15	90.0	6.6
2	*6385.00	85.6 AV			1.31 V	15	79.0	6.6
3	#12770.00	49.2 PK	88.2	-39.0	1.09 V	34	34.3	14.9
4	#12770.00	38.2 AV	68.2	-30.0	1.09 V	34	23.3	14.9
5	19155.00	58.0 PK	74.0	-16.0	2.06 V	360	62.7	-4.7
6	19155.00	49.0 AV	54.0	-5.0	2.06 V	360	53.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

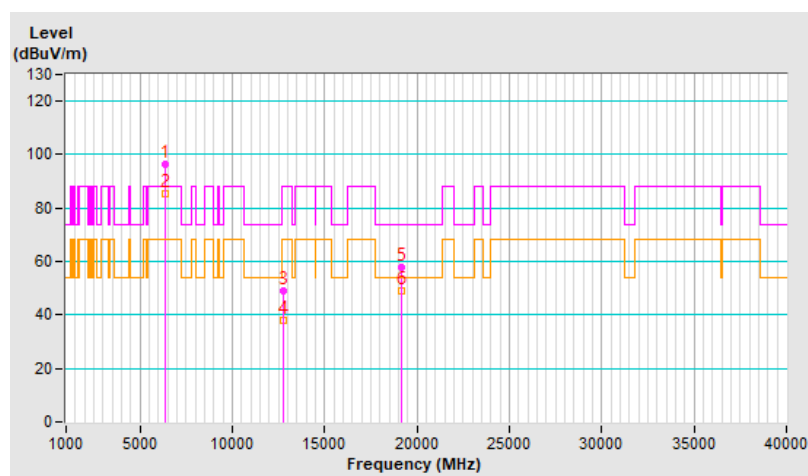


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	94.3 PK			1.03 H	180	86.5	7.8
2	*6625.00	81.7 AV			1.03 H	180	73.9	7.8
3	13250.00	47.5 PK	74.0	-26.5	1.51 H	89	32.1	15.4
4	13250.00	35.5 AV	54.0	-18.5	1.51 H	89	20.1	15.4
5	19875.00	53.8 PK	74.0	-20.2	1.94 H	360	58.3	-4.5
6	19875.00	45.8 AV	54.0	-8.2	1.94 H	360	50.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

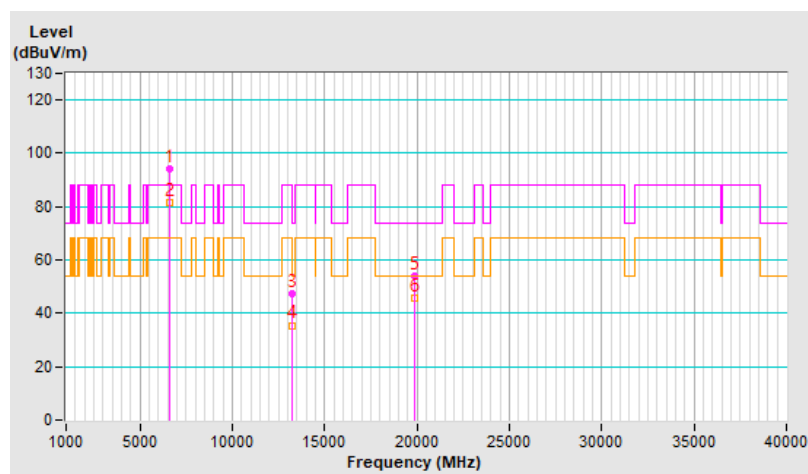


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	96.8 PK			1.31 V	2	89.0	7.8
2	*6625.00	85.6 AV			1.31 V	2	77.8	7.8
3	13250.00	50.1 PK	74.0	-23.9	1.13 V	12	34.7	15.4
4	13250.00	38.7 AV	54.0	-15.3	1.13 V	12	23.3	15.4
5	19875.00	57.4 PK	74.0	-16.6	2.03 V	342	61.9	-4.5
6	19875.00	48.4 AV	54.0	-5.6	2.03 V	342	52.9	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

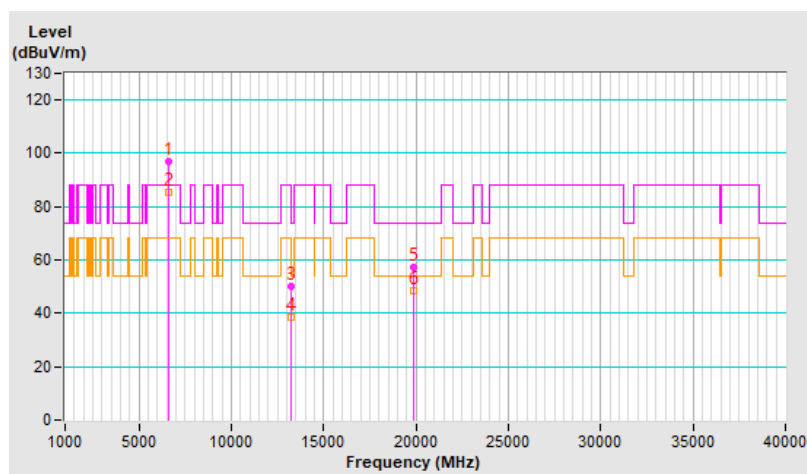


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	94.2 PK			1.08 H	156	86.6	7.6
2	*6705.00	81.9 AV			1.08 H	156	74.3	7.6
3	#13410.00	46.9 PK	88.2	-41.3	1.57 H	70	31.5	15.4
4	#13410.00	34.9 AV	68.2	-33.3	1.57 H	70	19.5	15.4
5	20115.00	53.7 PK	74.0	-20.3	1.89 H	360	57.8	-4.1
6	20115.00	45.7 AV	54.0	-8.3	1.89 H	360	49.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

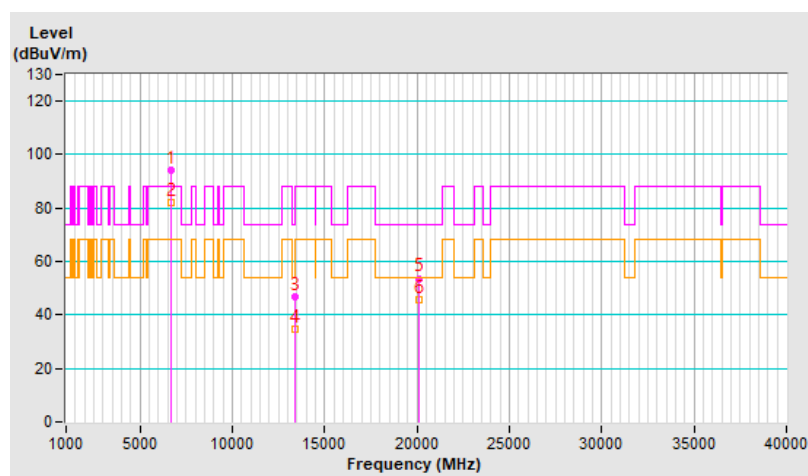


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	95.5 PK			1.33 V	5	87.9	7.6
2	*6705.00	84.7 AV			1.33 V	5	77.1	7.6
3	#13410.00	49.8 PK	88.2	-38.4	1.09 V	16	34.4	15.4
4	#13410.00	38.7 AV	68.2	-29.5	1.09 V	16	23.3	15.4
5	20115.00	57.7 PK	74.0	-16.3	1.97 V	360	61.8	-4.1
6	20115.00	48.9 AV	54.0	-5.1	1.97 V	360	53.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

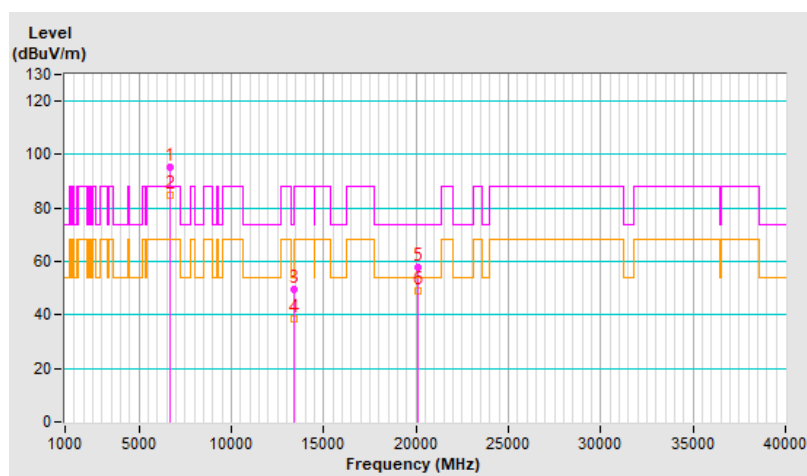


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	96.9 PK			2.46 H	204	89.2	7.7
2	*6785.00	84.8 AV			2.46 H	204	77.1	7.7
3	#13570.00	46.6 PK	88.2	-41.6	1.57 H	71	30.9	15.7
4	#13570.00	34.8 AV	68.2	-33.4	1.57 H	71	19.1	15.7
5	20355.00	54.4 PK	74.0	-19.6	1.88 H	360	58.2	-3.8
6	20355.00	46.0 AV	54.0	-8.0	1.88 H	360	49.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

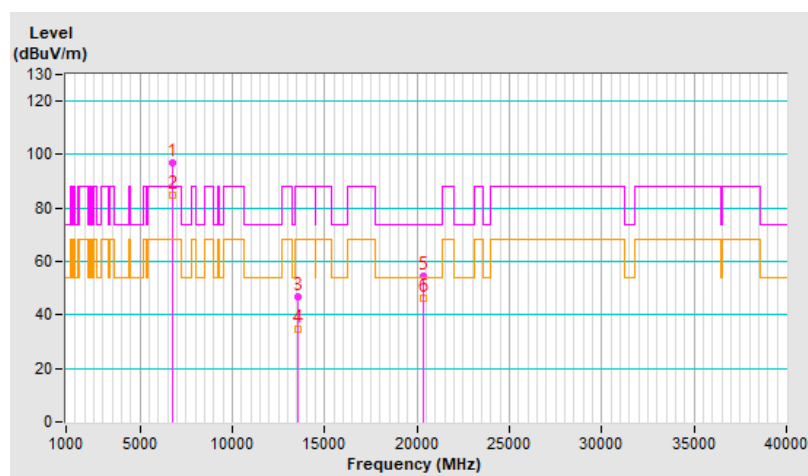


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	91.5 PK			1.52 V	356	83.8	7.7
2	*6785.00	80.6 AV			1.52 V	356	72.9	7.7
3	#13570.00	49.7 PK	88.2	-38.5	1.12 V	37	34.0	15.7
4	#13570.00	38.5 AV	68.2	-29.7	1.12 V	37	22.8	15.7
5	20355.00	57.8 PK	74.0	-16.2	2.03 V	358	61.6	-3.8
6	20355.00	49.0 AV	54.0	-5.0	2.03 V	358	52.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

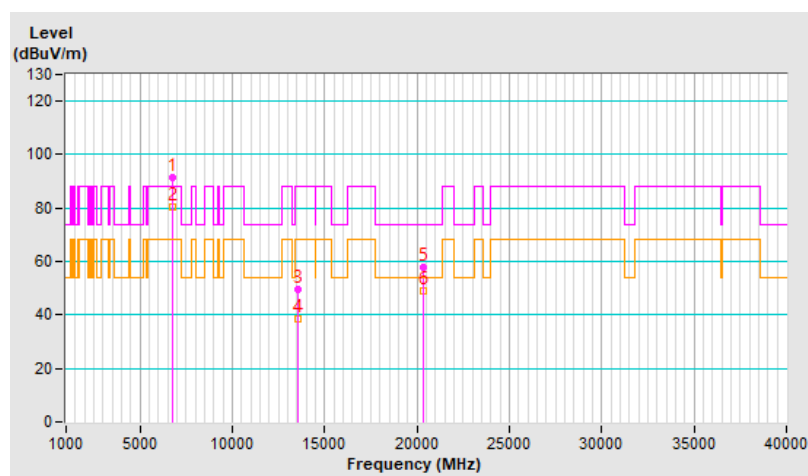


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.12 H	167	46.3	5.6
2	#5925.00	41.0 AV	68.2	-27.2	1.12 H	167	35.4	5.6
3	*6025.00	91.4 PK			1.12 H	167	85.8	5.6
4	*6025.00	80.8 AV			1.12 H	167	75.2	5.6
5	12050.00	46.8 PK	74.0	-27.2	1.50 H	76	32.2	14.6
6	12050.00	34.9 AV	54.0	-19.1	1.50 H	76	20.3	14.6
7	18075.00	54.6 PK	74.0	-19.4	1.97 H	360	59.9	-5.3
8	18075.00	46.1 AV	54.0	-7.9	1.97 H	360	51.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

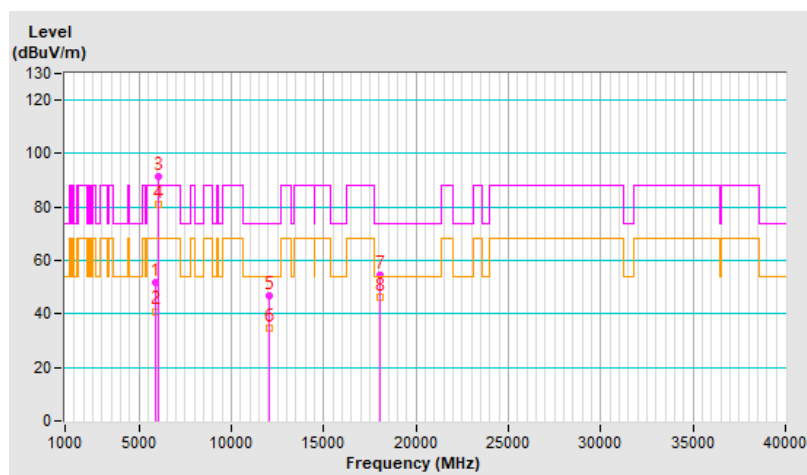


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.8 PK	88.2	-34.4	1.57 V	27	48.2	5.6
2	#5925.00	41.8 AV	68.2	-26.4	1.57 V	27	36.2	5.6
3	*6025.00	94.2 PK			1.57 V	27	88.6	5.6
4	*6025.00	83.4 AV			1.57 V	27	77.8	5.6
5	12050.00	49.7 PK	74.0	-24.3	1.07 V	28	35.1	14.6
6	12050.00	38.6 AV	54.0	-15.4	1.07 V	28	24.0	14.6
7	18075.00	57.5 PK	74.0	-16.5	1.98 V	360	62.8	-5.3
8	18075.00	48.6 AV	54.0	-5.4	1.98 V	360	53.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

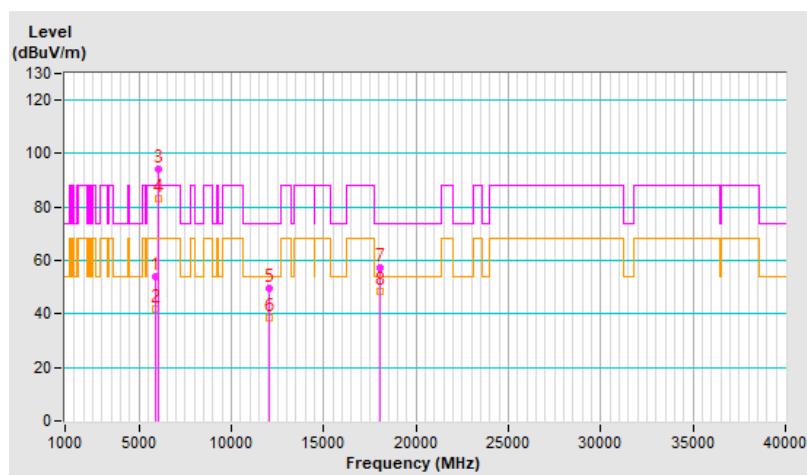


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	90.7 PK			1.18 H	175	84.9	5.8
2	*6185.00	80.4 AV			1.18 H	175	74.6	5.8
3	12370.00	46.7 PK	74.0	-27.3	1.51 H	86	32.0	14.7
4	12370.00	35.0 AV	54.0	-19.0	1.51 H	86	20.3	14.7
5	18555.00	54.4 PK	74.0	-19.6	1.94 H	360	59.8	-5.4
6	18555.00	46.4 AV	54.0	-7.6	1.94 H	360	51.8	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

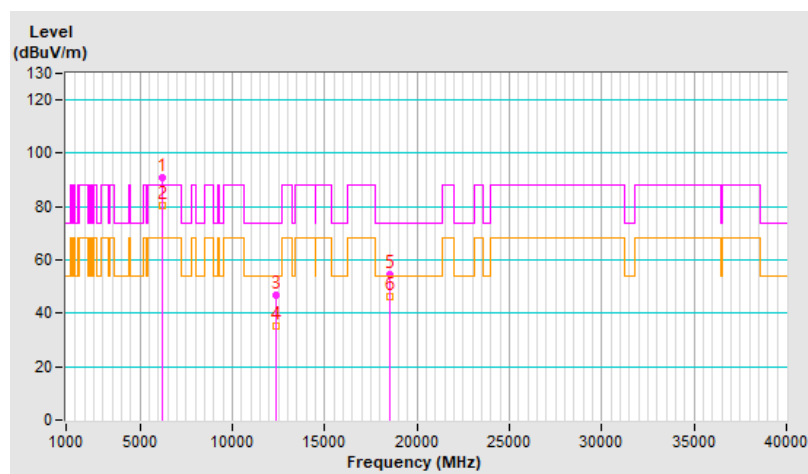


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	94.5 PK			1.63 V	18	88.7	5.8
2	*6185.00	83.6 AV			1.63 V	18	77.8	5.8
3	12370.00	49.8 PK	74.0	-24.2	1.11 V	25	35.1	14.7
4	12370.00	38.8 AV	54.0	-15.2	1.11 V	25	24.1	14.7
5	18555.00	57.8 PK	74.0	-16.2	1.97 V	349	63.2	-5.4
6	18555.00	49.2 AV	54.0	-4.8	1.97 V	349	54.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

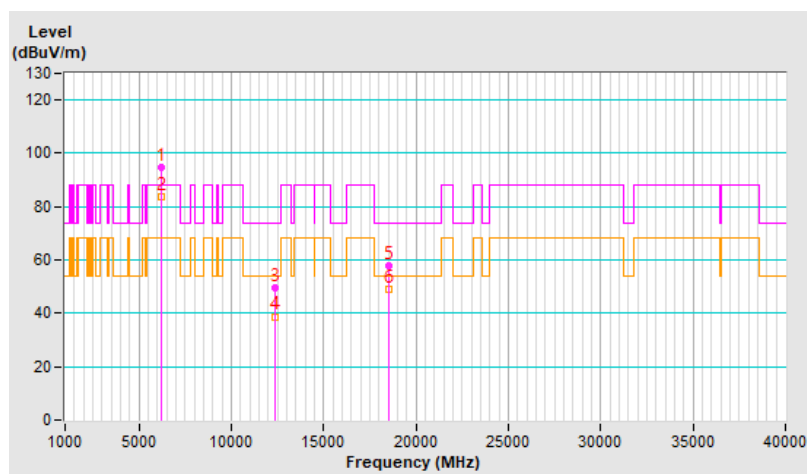


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	90.8 PK			1.08 H	160	84.4	6.4
2	*6345.00	80.5 AV			1.08 H	160	74.1	6.4
3	12690.00	47.3 PK	74.0	-26.7	1.46 H	91	32.4	14.9
4	12690.00	35.4 AV	54.0	-18.6	1.46 H	91	20.5	14.9
5	19035.00	54.4 PK	74.0	-19.6	1.99 H	360	59.3	-4.9
6	19035.00	46.1 AV	54.0	-7.9	1.99 H	360	51.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

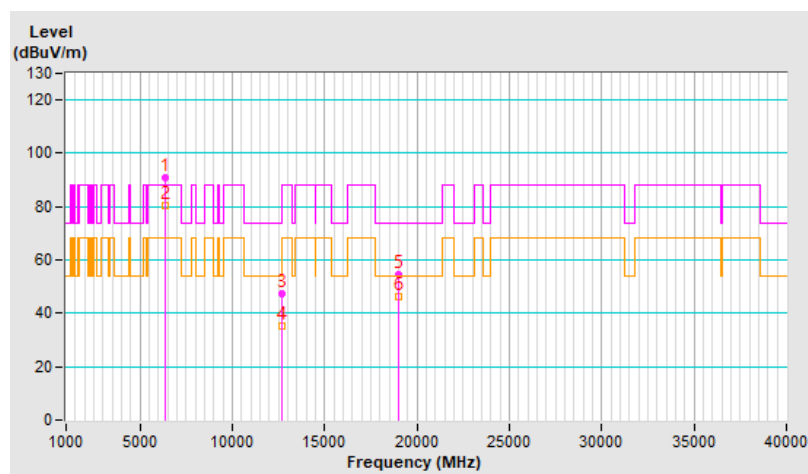


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	93.8 PK			1.59 V	17	87.4	6.4
2	*6345.00	82.9 AV			1.59 V	17	76.5	6.4
3	12690.00	49.9 PK	74.0	-24.1	1.15 V	42	35.0	14.9
4	12690.00	38.6 AV	54.0	-15.4	1.15 V	42	23.7	14.9
5	19035.00	58.1 PK	74.0	-15.9	2.06 V	360	63.0	-4.9
6	19035.00	49.1 AV	54.0	-4.9	2.06 V	360	54.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

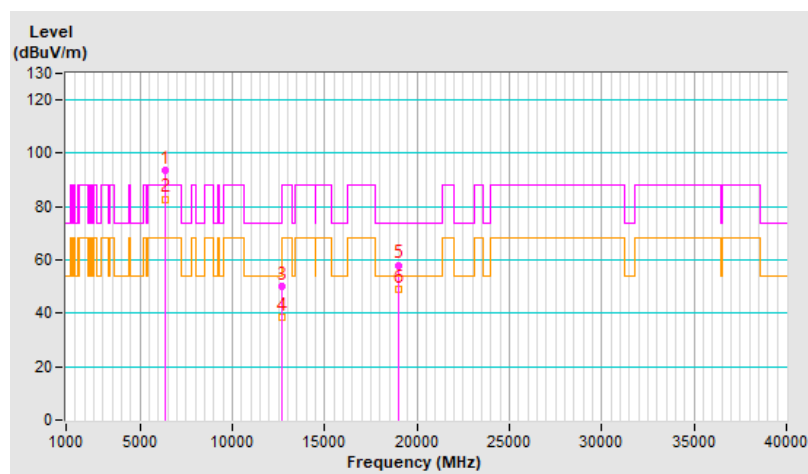


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	97.9 PK			2.31 H	201	90.1	7.8
2	*6665.00	85.8 AV			2.31 H	201	78.0	7.8
3	13330.00	46.9 PK	74.0	-27.1	1.49 H	79	31.6	15.3
4	13330.00	34.8 AV	54.0	-19.2	1.49 H	79	19.5	15.3
5	19995.00	54.6 PK	74.0	-19.4	1.88 H	360	59.0	-4.4
6	19995.00	46.2 AV	54.0	-7.8	1.88 H	360	50.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

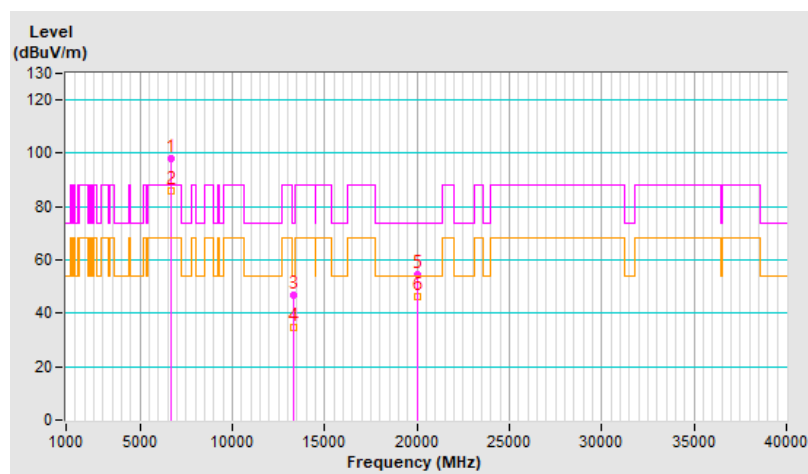


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	93.7 PK			1.01 V	146	85.9	7.8
2	*6665.00	84.6 AV			1.01 V	146	76.8	7.8
3	13330.00	49.3 PK	74.0	-24.7	1.11 V	33	34.0	15.3
4	13330.00	38.3 AV	54.0	-15.7	1.11 V	33	23.0	15.3
5	19995.00	58.0 PK	74.0	-16.0	1.97 V	353	62.4	-4.4
6	19995.00	49.0 AV	54.0	-5.0	1.97 V	353	53.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

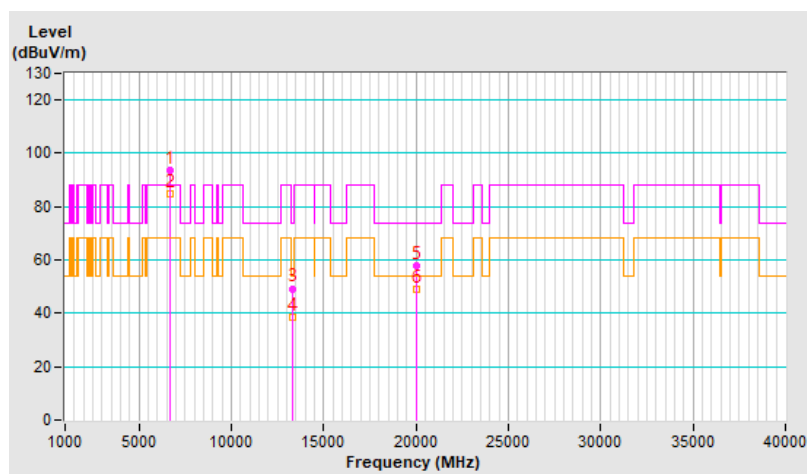


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.20 H	163	46.3	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.20 H	163	33.8	5.6
3	*5955.00	91.3 PK			1.20 H	163	85.8	5.5
4	*5955.00	81.9 AV			1.20 H	163	76.4	5.5
5	11910.00	47.2 PK	74.0	-26.8	1.47 H	67	32.6	14.6
6	11910.00	35.6 AV	54.0	-18.4	1.47 H	67	21.0	14.6
7	17865.00	54.5 PK	74.0	-19.5	2.00 H	360	28.6	25.9
8	17865.00	46.0 AV	54.0	-8.0	2.00 H	360	20.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

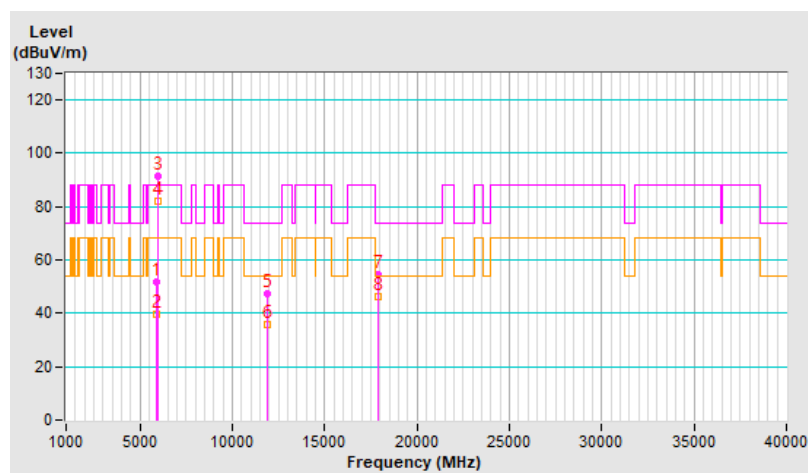


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.50 V	19	46.1	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.50 V	19	33.8	5.6
3	*5955.00	94.3 PK			1.50 V	19	88.8	5.5
4	*5955.00	84.2 AV			1.50 V	19	78.7	5.5
5	11910.00	50.1 PK	74.0	-23.9	1.04 V	7	35.5	14.6
6	11910.00	38.7 AV	54.0	-15.3	1.04 V	7	24.1	14.6
7	17865.00	57.1 PK	74.0	-16.9	1.94 V	357	31.2	25.9
8	17865.00	48.1 AV	54.0	-5.9	1.94 V	357	22.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

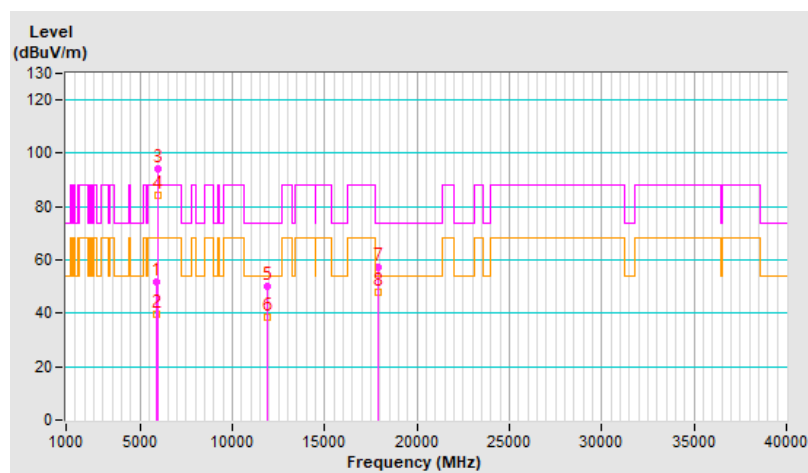


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	90.7 PK			1.24 H	170	84.9	5.8
2	*6195.00	81.5 AV			1.24 H	170	75.7	5.8
3	12390.00	47.4 PK	74.0	-26.6	1.46 H	63	32.7	14.7
4	12390.00	35.6 AV	54.0	-18.4	1.46 H	63	20.9	14.7
5	18585.00	54.0 PK	74.0	-20.0	1.91 H	350	59.5	-5.5
6	18585.00	45.8 AV	54.0	-8.2	1.91 H	350	51.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

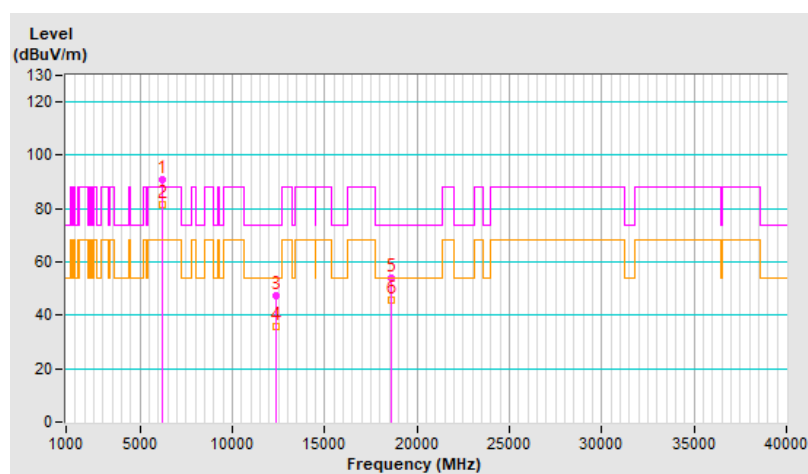


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	93.9 PK			1.47 V	11	88.1	5.8
2	*6195.00	83.8 AV			1.47 V	11	78.0	5.8
3	12390.00	50.1 PK	74.0	-23.9	1.14 V	18	35.4	14.7
4	12390.00	39.1 AV	54.0	-14.9	1.14 V	18	24.4	14.7
5	18585.00	56.7 PK	74.0	-17.3	2.04 V	349	62.2	-5.5
6	18585.00	48.1 AV	54.0	-5.9	2.04 V	349	53.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

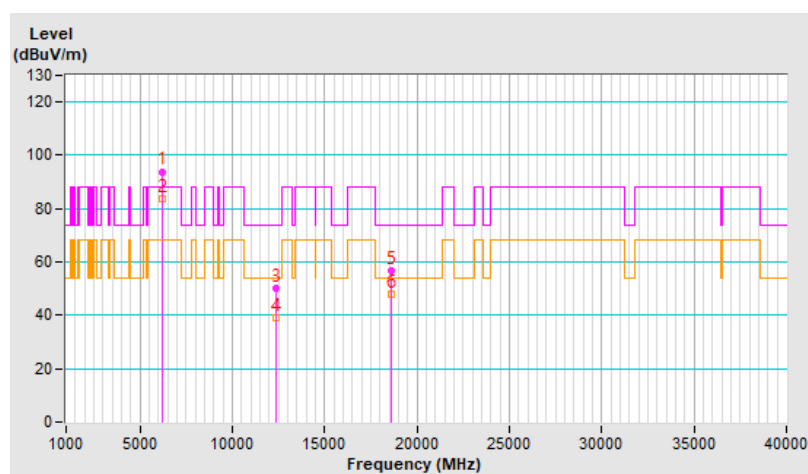


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.3 PK			1.25 H	149	84.5	6.8
2	*6415.00	82.1 AV			1.25 H	149	75.3	6.8
3	#12830.00	47.2 PK	88.2	-41.0	1.43 H	63	32.1	15.1
4	#12830.00	35.7 AV	68.2	-32.5	1.43 H	63	20.6	15.1
5	19245.00	53.8 PK	74.0	-20.2	1.95 H	360	58.4	-4.6
6	19245.00	45.6 AV	54.0	-8.4	1.95 H	360	50.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

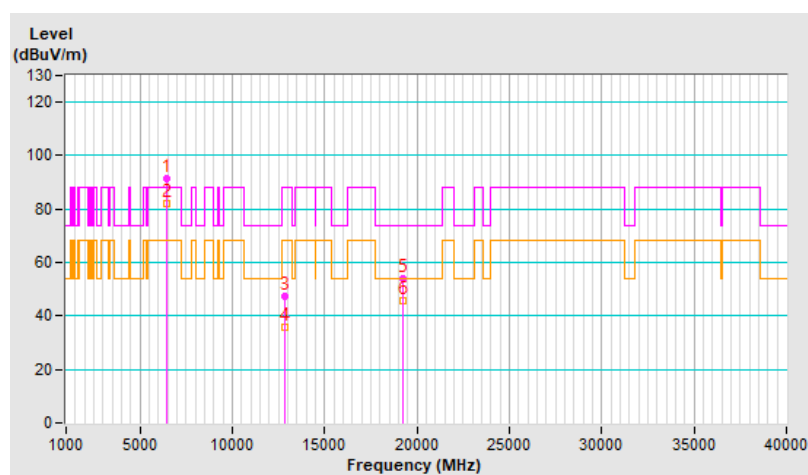


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.9 PK			1.50 V	24	87.1	6.8
2	*6415.00	83.7 AV			1.50 V	24	76.9	6.8
3	#12830.00	50.6 PK	88.2	-37.6	1.07 V	27	35.5	15.1
4	#12830.00	39.2 AV	68.2	-29.0	1.07 V	27	24.1	15.1
5	19245.00	57.3 PK	74.0	-16.7	1.96 V	351	61.9	-4.6
6	19245.00	48.6 AV	54.0	-5.4	1.96 V	351	53.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

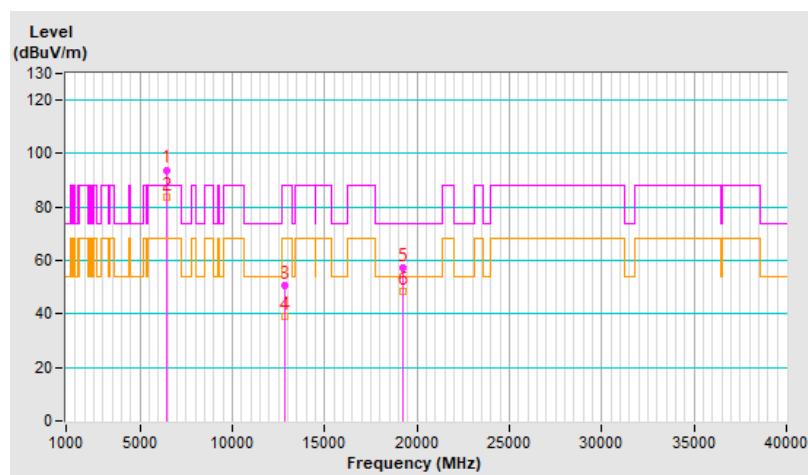


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.7 PK			1.22 H	167	84.3	7.4
2	*6535.00	82.3 AV			1.22 H	167	74.9	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.52 H	70	31.9	15.1
4	#13070.00	35.3 AV	68.2	-32.9	1.52 H	70	20.2	15.1
5	19605.00	54.1 PK	74.0	-19.9	1.98 H	360	58.9	-4.8
6	19605.00	45.5 AV	54.0	-8.5	1.98 H	360	50.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

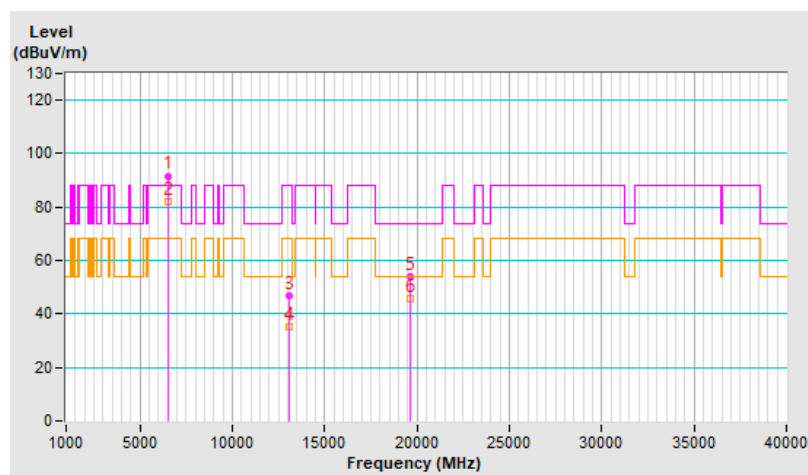


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.0 PK			1.45 V	30	86.6	7.4
2	*6535.00	84.1 AV			1.45 V	30	76.7	7.4
3	#13070.00	50.5 PK	88.2	-37.7	1.09 V	11	35.4	15.1
4	#13070.00	39.1 AV	68.2	-29.1	1.09 V	11	24.0	15.1
5	19605.00	57.1 PK	74.0	-16.9	1.98 V	354	61.9	-4.8
6	19605.00	48.4 AV	54.0	-5.6	1.98 V	354	53.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

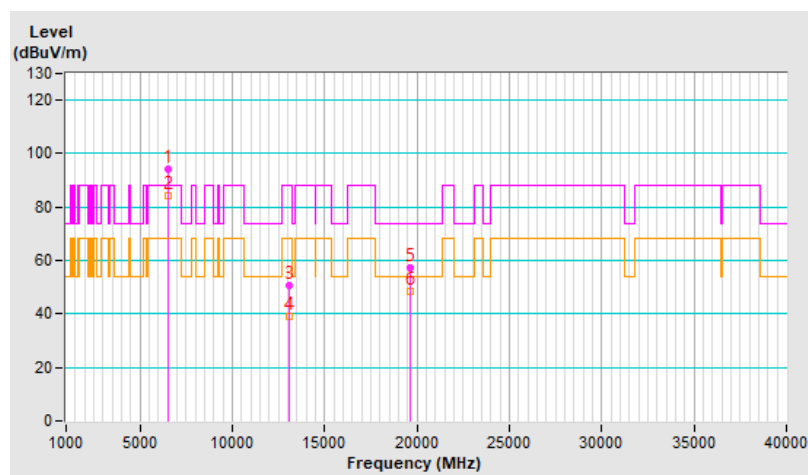


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	91.9 PK			1.20 H	147	84.2	7.7
2	*6695.00	82.4 AV			1.20 H	147	74.7	7.7
3	13390.00	47.3 PK	74.0	-26.7	1.44 H	56	31.9	15.4
4	13390.00	35.3 AV	54.0	-18.7	1.44 H	56	19.9	15.4
5	20085.00	54.0 PK	74.0	-20.0	1.92 H	360	58.3	-4.3
6	20085.00	45.7 AV	54.0	-8.3	1.92 H	360	50.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

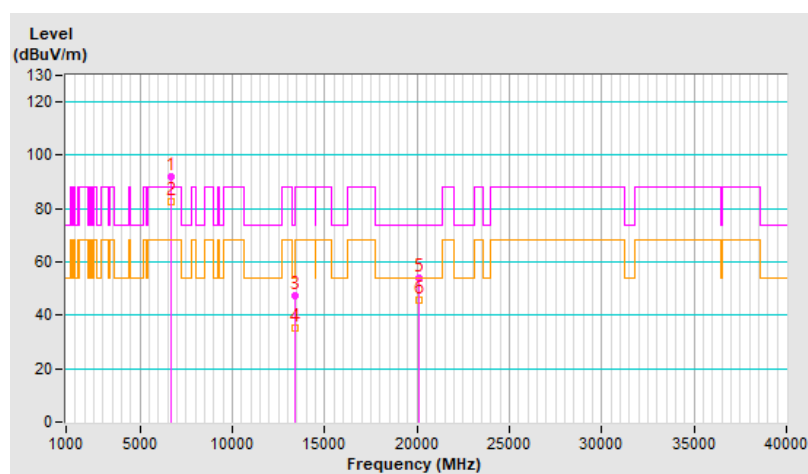


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	93.8 PK			1.55 V	20	86.1	7.7
2	*6695.00	83.7 AV			1.55 V	20	76.0	7.7
3	13390.00	50.5 PK	74.0	-23.5	1.12 V	25	35.1	15.4
4	13390.00	39.2 AV	54.0	-14.8	1.12 V	25	23.8	15.4
5	20085.00	57.4 PK	74.0	-16.6	2.00 V	360	61.7	-4.3
6	20085.00	48.6 AV	54.0	-5.4	2.00 V	360	52.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

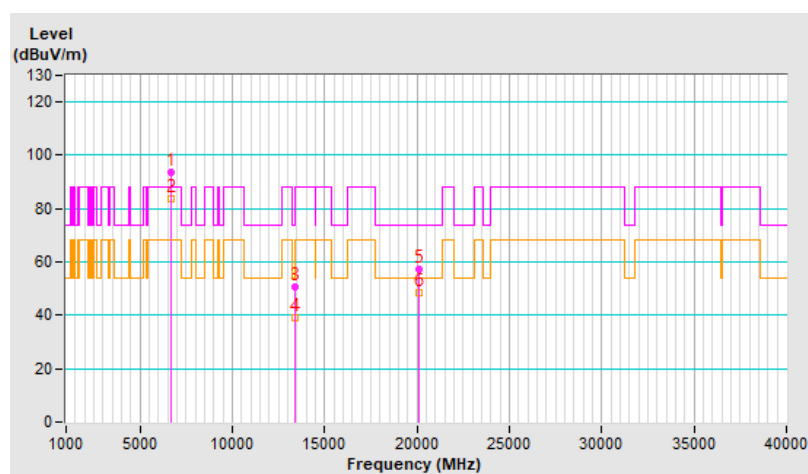


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	92.6 PK			2.21 H	195	84.4	8.2
2	*6855.00	81.9 AV			2.21 H	195	73.7	8.2
3	#13710.00	46.9 PK	88.2	-41.3	1.45 H	78	30.6	16.3
4	#13710.00	35.2 AV	68.2	-33.0	1.45 H	78	18.9	16.3
5	20565.00	53.8 PK	74.0	-20.2	2.00 H	360	57.5	-3.7
6	20565.00	45.7 AV	54.0	-8.3	2.00 H	360	49.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

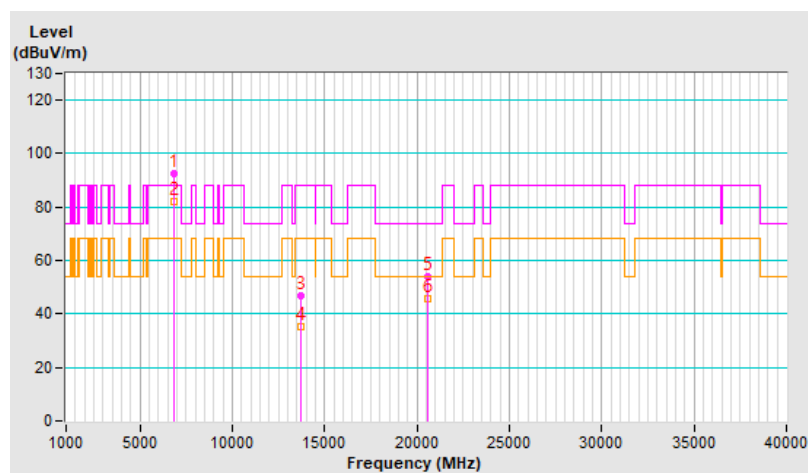


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	90.8 PK			1.87 V	341	82.6	8.2
2	*6855.00	81.1 AV			1.87 V	341	72.9	8.2
3	#13710.00	50.4 PK	88.2	-37.8	1.10 V	9	34.1	16.3
4	#13710.00	38.8 AV	68.2	-29.4	1.10 V	9	22.5	16.3
5	20565.00	57.2 PK	74.0	-16.8	2.02 V	360	60.9	-3.7
6	20565.00	48.3 AV	54.0	-5.7	2.02 V	360	52.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

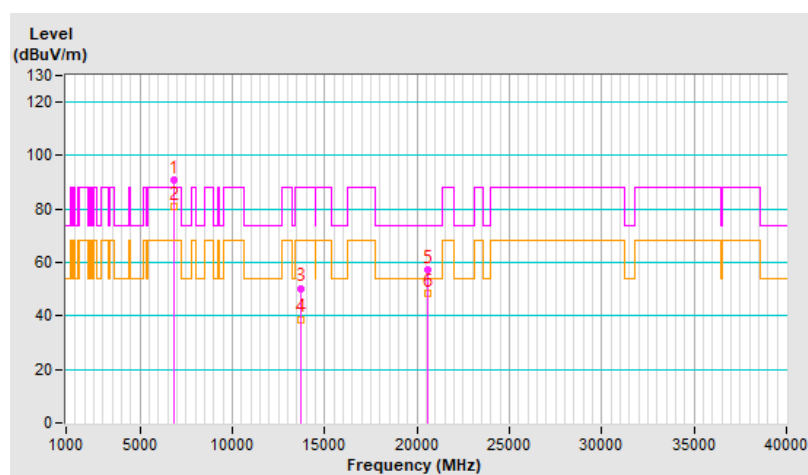


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.21 H	163	45.7	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.21 H	163	34.1	5.6
3	*5955.00	92.3 PK			1.21 H	163	86.8	5.5
4	*5955.00	82.2 AV			1.21 H	163	76.7	5.5
5	11910.00	47.6 PK	74.0	-26.4	1.51 H	77	33.0	14.6
6	11910.00	35.7 AV	54.0	-18.3	1.51 H	77	21.1	14.6
7	17865.00	54.1 PK	74.0	-19.9	1.99 H	360	28.2	25.9
8	17865.00	45.6 AV	54.0	-8.4	1.99 H	360	19.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

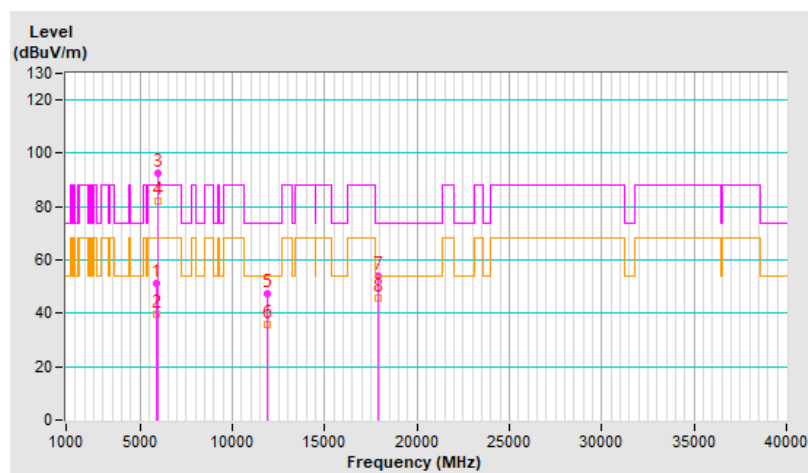


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	1.52 V	15	46.2	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.52 V	15	33.9	5.6
3	*5955.00	95.3 PK			1.52 V	15	89.8	5.5
4	*5955.00	83.0 AV			1.52 V	15	77.5	5.5
5	11910.00	49.7 PK	74.0	-24.3	1.06 V	36	35.1	14.6
6	11910.00	38.7 AV	54.0	-15.3	1.06 V	36	24.1	14.6
7	17865.00	57.3 PK	74.0	-16.7	1.94 V	351	31.4	25.9
8	17865.00	48.5 AV	54.0	-5.5	1.94 V	351	22.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

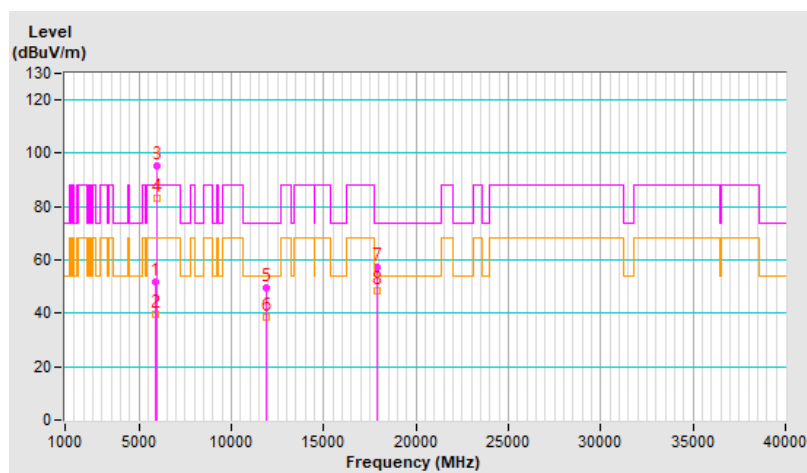


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	92.2 PK			1.16 H	153	86.4	5.8
2	*6195.00	82.2 AV			1.16 H	153	76.4	5.8
3	12390.00	46.4 PK	74.0	-27.6	1.48 H	78	31.7	14.7
4	12390.00	34.8 AV	54.0	-19.2	1.48 H	78	20.1	14.7
5	18585.00	54.3 PK	74.0	-19.7	1.92 H	360	59.8	-5.5
6	18585.00	45.8 AV	54.0	-8.2	1.92 H	360	51.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

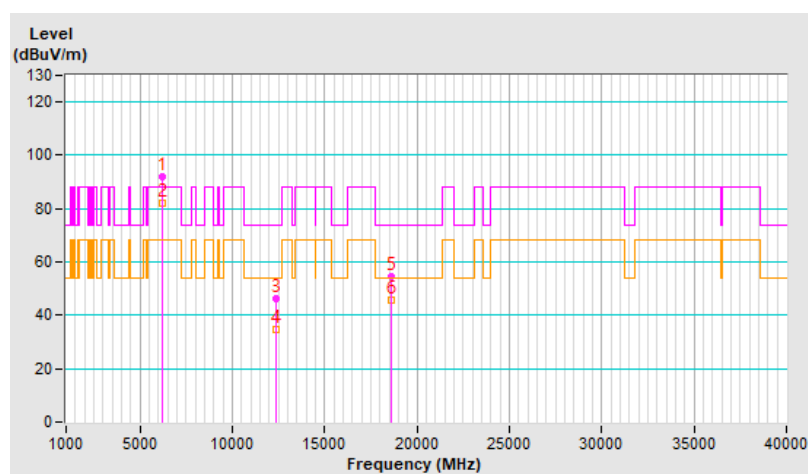


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.5 PK			1.50 V	12	89.7	5.8
2	*6195.00	83.1 AV			1.50 V	12	77.3	5.8
3	12390.00	49.8 PK	74.0	-24.2	1.16 V	26	35.1	14.7
4	12390.00	38.7 AV	54.0	-15.3	1.16 V	26	24.0	14.7
5	18585.00	57.4 PK	74.0	-16.6	2.01 V	341	62.9	-5.5
6	18585.00	48.5 AV	54.0	-5.5	2.01 V	341	54.0	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

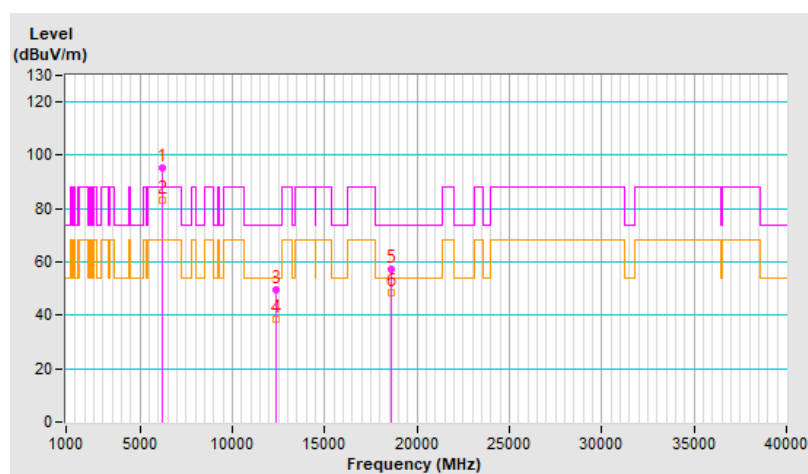


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.1 PK			1.22 H	174	85.3	6.8
2	*6415.00	82.1 AV			1.22 H	174	75.3	6.8
3	#12830.00	47.4 PK	88.2	-40.8	1.44 H	61	32.3	15.1
4	#12830.00	35.6 AV	68.2	-32.6	1.44 H	61	20.5	15.1
5	19245.00	54.5 PK	74.0	-19.5	1.96 H	359	59.1	-4.6
6	19245.00	45.8 AV	54.0	-8.2	1.96 H	359	50.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

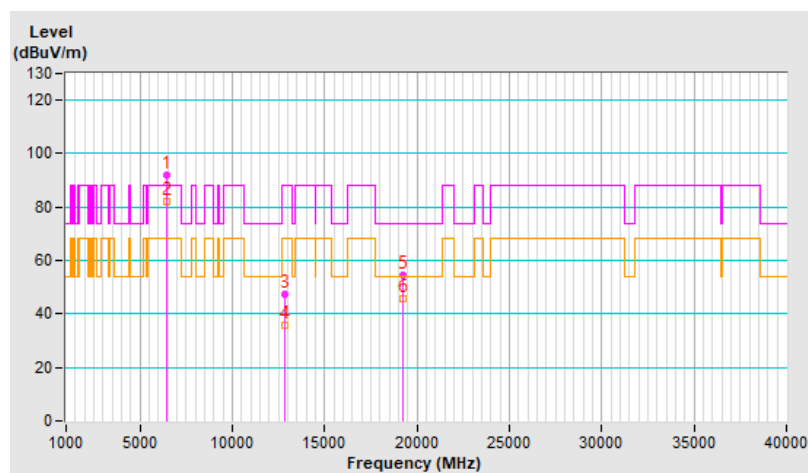


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.3 PK			1.51 V	2	88.5	6.8
2	*6415.00	83.1 AV			1.51 V	2	76.3	6.8
3	#12830.00	50.6 PK	88.2	-37.6	1.14 V	19	35.5	15.1
4	#12830.00	39.0 AV	68.2	-29.2	1.14 V	19	23.9	15.1
5	19245.00	57.3 PK	74.0	-16.7	2.00 V	349	61.9	-4.6
6	19245.00	48.4 AV	54.0	-5.6	2.00 V	349	53.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

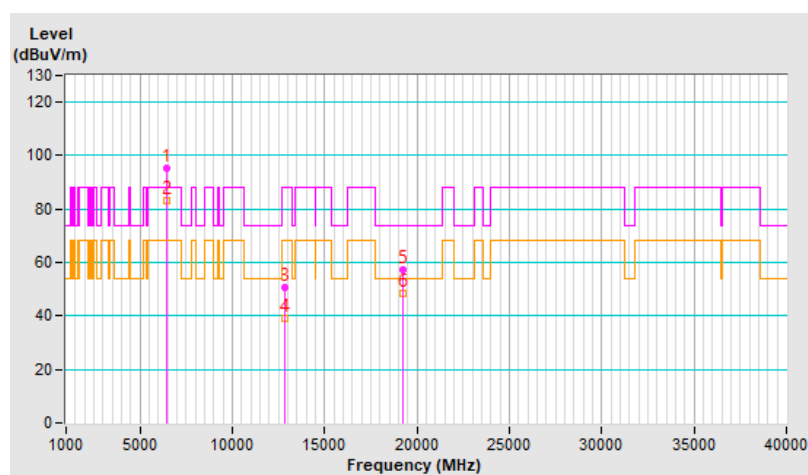


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.3 PK			1.22 H	148	84.9	7.4
2	*6535.00	82.1 AV			1.22 H	148	74.7	7.4
3	#13070.00	46.8 PK	88.2	-41.4	1.52 H	68	31.7	15.1
4	#13070.00	35.1 AV	68.2	-33.1	1.52 H	68	20.0	15.1
5	19605.00	53.4 PK	74.0	-20.6	1.98 H	360	58.2	-4.8
6	19605.00	45.3 AV	54.0	-8.7	1.98 H	360	50.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

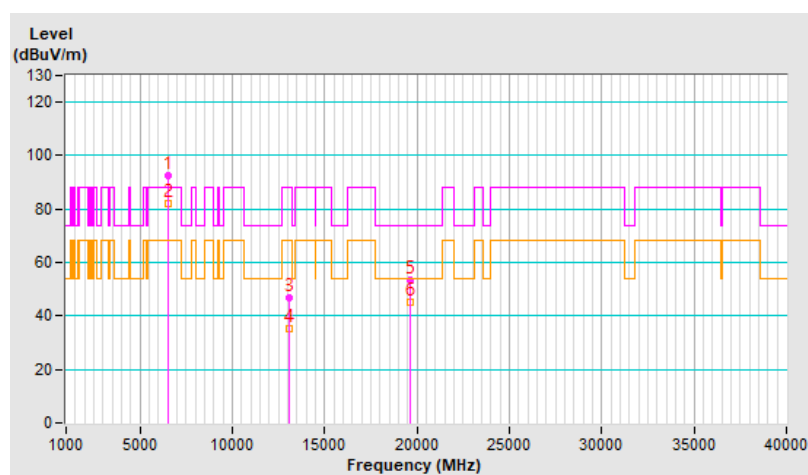


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.7 PK			1.57 V	7	87.3	7.4
2	*6535.00	82.7 AV			1.57 V	7	75.3	7.4
3	#13070.00	50.1 PK	88.2	-38.1	1.06 V	11	35.0	15.1
4	#13070.00	38.6 AV	68.2	-29.6	1.06 V	11	23.5	15.1
5	19605.00	56.6 PK	74.0	-17.4	1.99 V	345	61.4	-4.8
6	19605.00	47.8 AV	54.0	-6.2	1.99 V	345	52.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

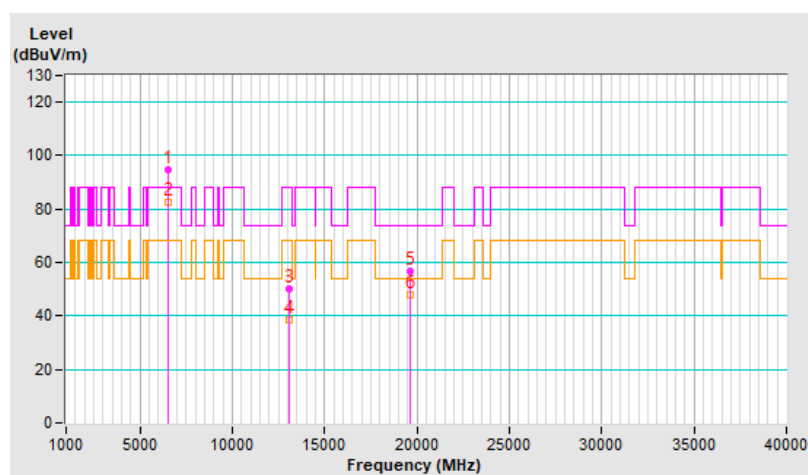


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	91.8 PK			1.17 H	175	84.1	7.7
2	*6695.00	81.8 AV			1.17 H	175	74.1	7.7
3	13390.00	47.5 PK	74.0	-26.5	1.45 H	73	32.1	15.4
4	13390.00	35.7 AV	54.0	-18.3	1.45 H	73	20.3	15.4
5	20085.00	53.7 PK	74.0	-20.3	1.92 H	360	58.0	-4.3
6	20085.00	45.6 AV	54.0	-8.4	1.92 H	360	49.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

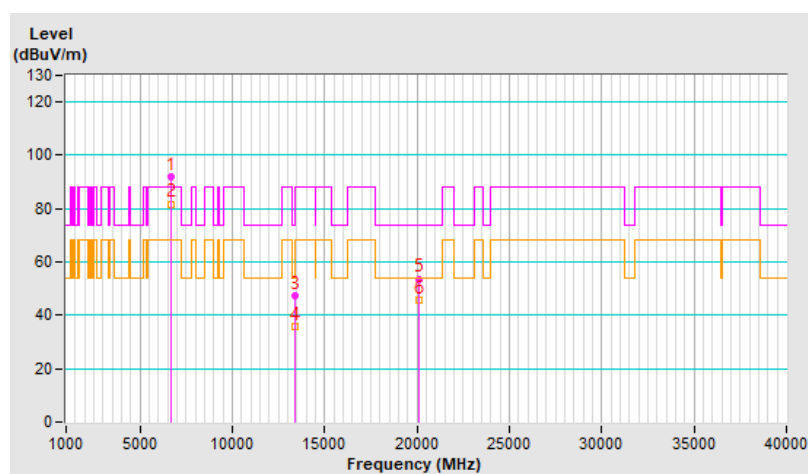


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.2 PK			1.50 V	25	87.5	7.7
2	*6695.00	83.1 AV			1.50 V	25	75.4	7.7
3	13390.00	50.5 PK	74.0	-23.5	1.15 V	20	35.1	15.4
4	13390.00	39.2 AV	54.0	-14.8	1.15 V	20	23.8	15.4
5	20085.00	57.6 PK	74.0	-16.4	2.03 V	346	61.9	-4.3
6	20085.00	48.5 AV	54.0	-5.5	2.03 V	346	52.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

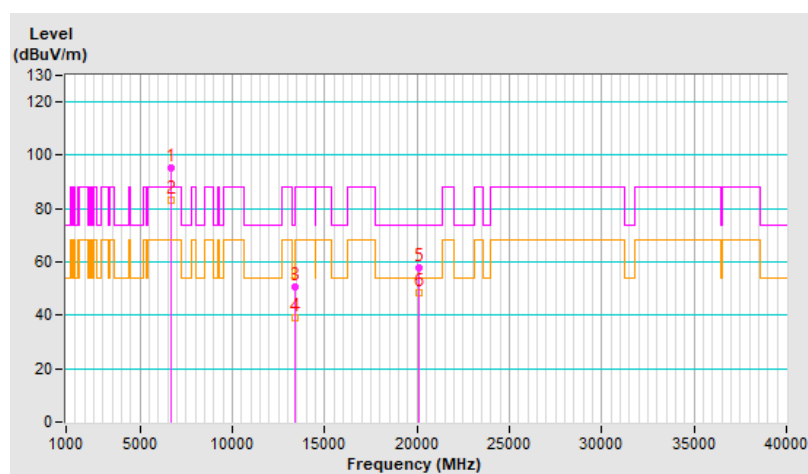


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	92.4 PK			2.22 H	197	84.2	8.2
2	*6855.00	81.8 AV			2.22 H	197	73.6	8.2
3	#13710.00	46.5 PK	88.2	-41.7	1.53 H	68	30.2	16.3
4	#13710.00	34.9 AV	68.2	-33.3	1.53 H	68	18.6	16.3
5	20565.00	53.7 PK	74.0	-20.3	1.94 H	347	57.4	-3.7
6	20565.00	45.6 AV	54.0	-8.4	1.94 H	347	49.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

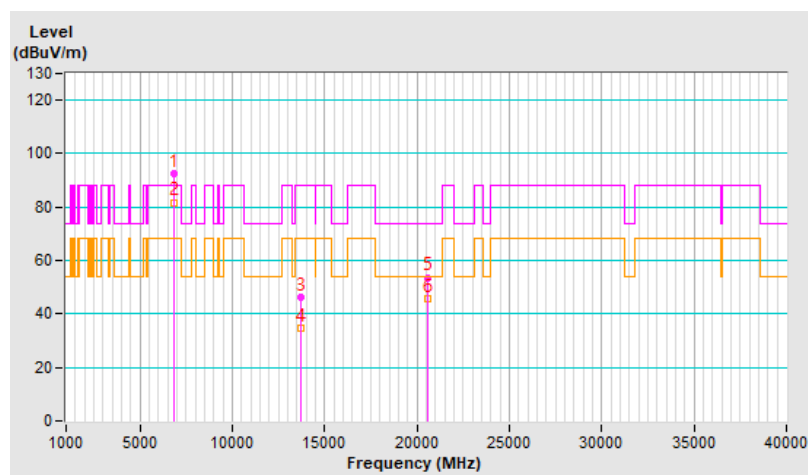


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.8 PK			1.68 V	339	83.6	8.2
2	*6855.00	81.7 AV			1.68 V	339	73.5	8.2
3	#13710.00	50.1 PK	88.2	-38.1	1.14 V	37	33.8	16.3
4	#13710.00	38.5 AV	68.2	-29.7	1.14 V	37	22.2	16.3
5	20565.00	57.1 PK	74.0	-16.9	2.00 V	360	60.8	-3.7
6	20565.00	48.3 AV	54.0	-5.7	2.00 V	360	52.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

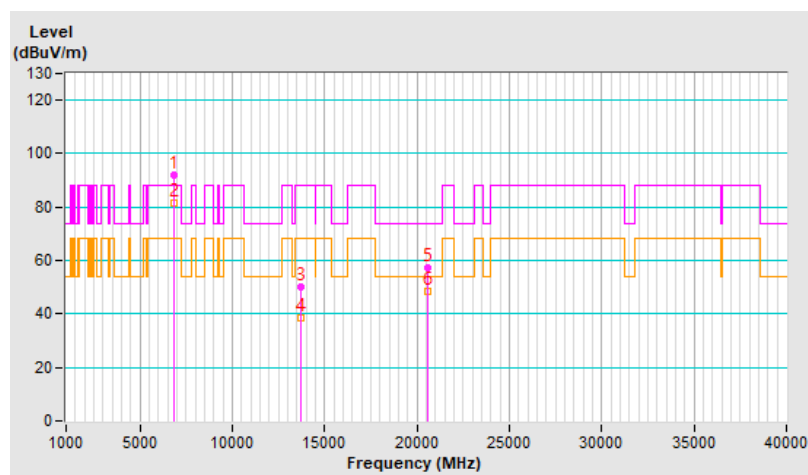


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.7 PK	88.2	-37.5	1.50 H	167	45.1	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.50 H	167	33.9	5.6
3	*5955.00	89.6 PK			1.50 H	167	84.1	5.5
4	*5955.00	80.7 AV			1.50 H	167	75.2	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.54 H	79	32.1	14.6
6	11910.00	34.8 AV	54.0	-19.2	1.54 H	79	20.2	14.6
7	17865.00	53.8 PK	74.0	-20.2	1.92 H	360	27.9	25.9
8	17865.00	45.7 AV	54.0	-8.3	1.92 H	360	19.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

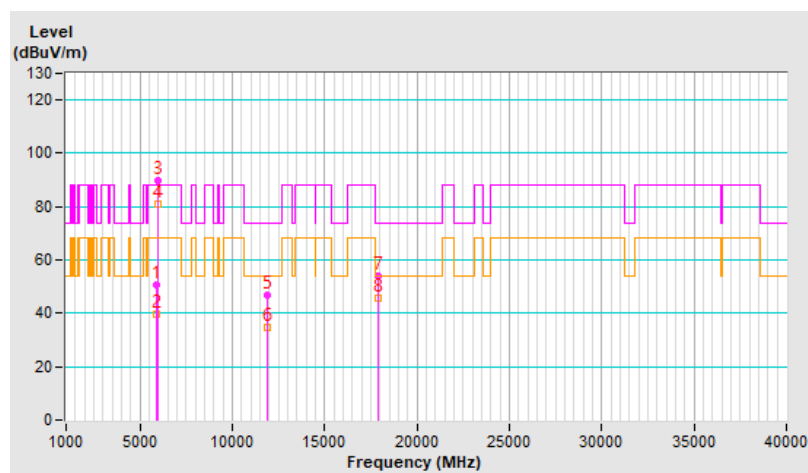


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.15 V	360	46.0	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.15 V	360	33.8	5.6
3	*5955.00	96.4 PK			1.15 V	360	90.9	5.5
4	*5955.00	85.2 AV			1.15 V	360	79.7	5.5
5	11910.00	50.3 PK	74.0	-23.7	1.16 V	5	35.7	14.6
6	11910.00	39.0 AV	54.0	-15.0	1.16 V	5	24.4	14.6
7	17865.00	57.3 PK	74.0	-16.7	1.98 V	360	31.4	25.9
8	17865.00	48.3 AV	54.0	-5.7	1.98 V	360	22.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

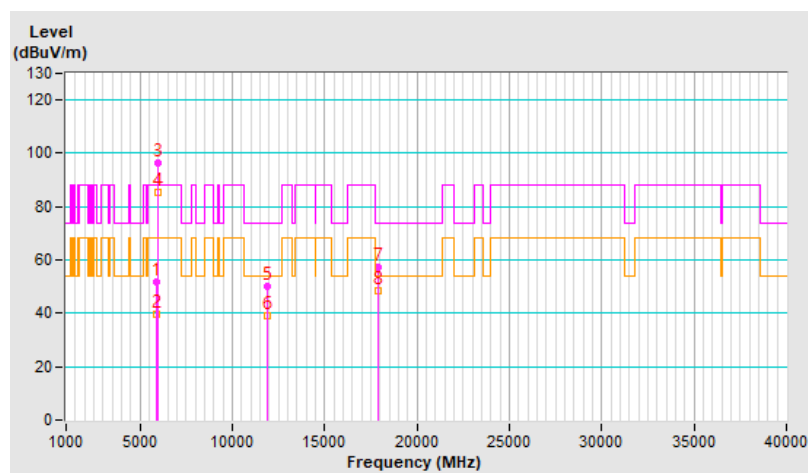


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	89.9 PK			1.54 H	170	84.1	5.8
2	*6195.00	80.9 AV			1.54 H	170	75.1	5.8
3	12390.00	47.7 PK	74.0	-26.3	1.45 H	58	33.0	14.7
4	12390.00	35.6 AV	54.0	-18.4	1.45 H	58	20.9	14.7
5	18585.00	53.9 PK	74.0	-20.1	1.94 H	353	59.4	-5.5
6	18585.00	45.8 AV	54.0	-8.2	1.94 H	353	51.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

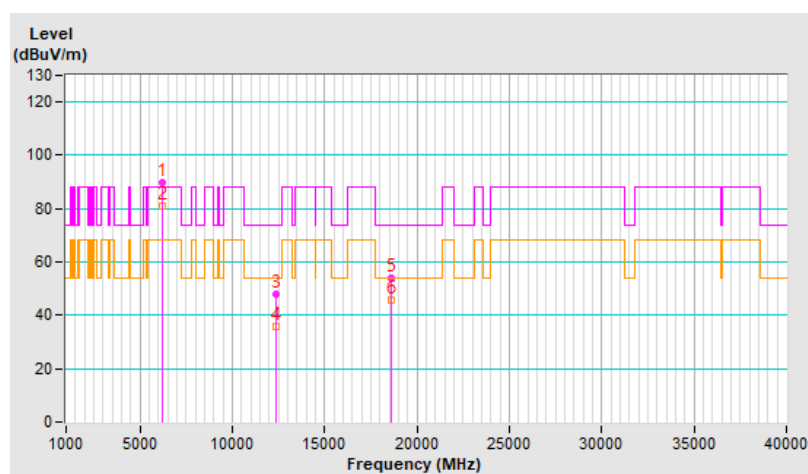


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	96.7 PK			1.17 V	360	90.9	5.8
2	*6195.00	85.6 AV			1.17 V	360	79.8	5.8
3	12390.00	49.8 PK	74.0	-24.2	1.07 V	33	35.1	14.7
4	12390.00	38.4 AV	54.0	-15.6	1.07 V	33	23.7	14.7
5	18585.00	57.2 PK	74.0	-16.8	2.05 V	346	62.7	-5.5
6	18585.00	48.6 AV	54.0	-5.4	2.05 V	346	54.1	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

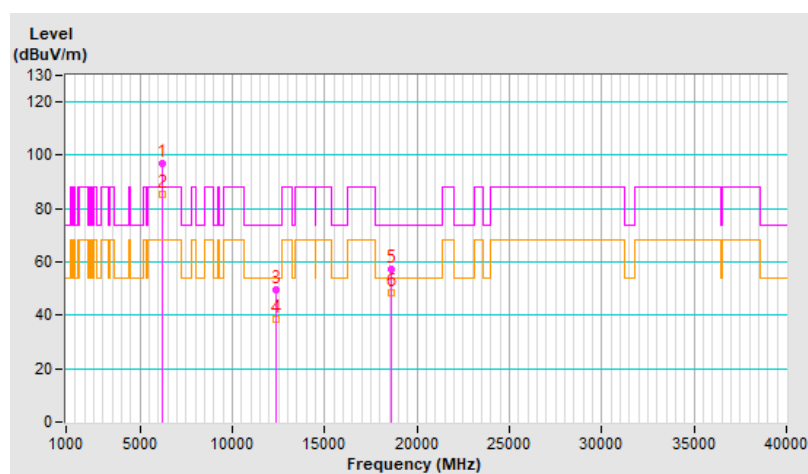


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	89.6 PK			1.48 H	156	82.8	6.8
2	*6415.00	80.6 AV			1.48 H	156	73.8	6.8
3	#12830.00	46.8 PK	88.2	-41.4	1.49 H	83	31.7	15.1
4	#12830.00	34.7 AV	68.2	-33.5	1.49 H	83	19.6	15.1
5	19245.00	54.5 PK	74.0	-19.5	1.96 H	360	59.1	-4.6
6	19245.00	46.0 AV	54.0	-8.0	1.96 H	360	50.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

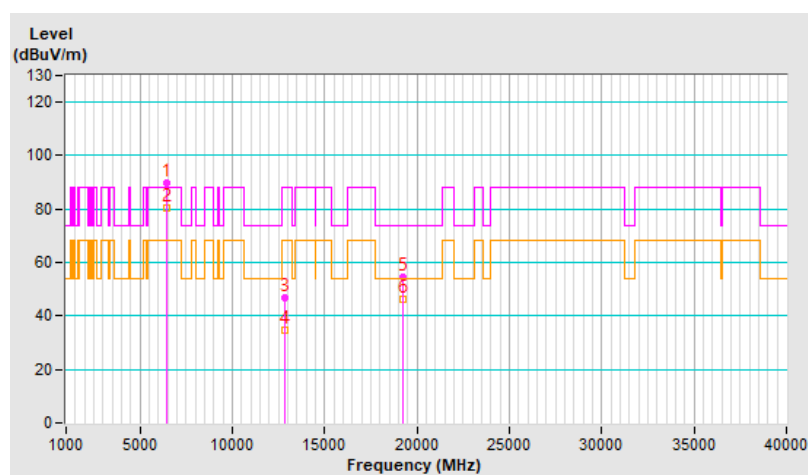


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.0 PK			1.17 V	360	89.2	6.8
2	*6415.00	84.7 AV			1.17 V	360	77.9	6.8
3	#12830.00	50.3 PK	88.2	-37.9	1.06 V	18	35.2	15.1
4	#12830.00	39.2 AV	68.2	-29.0	1.06 V	18	24.1	15.1
5	19245.00	57.1 PK	74.0	-16.9	2.02 V	351	61.7	-4.6
6	19245.00	48.3 AV	54.0	-5.7	2.02 V	351	52.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

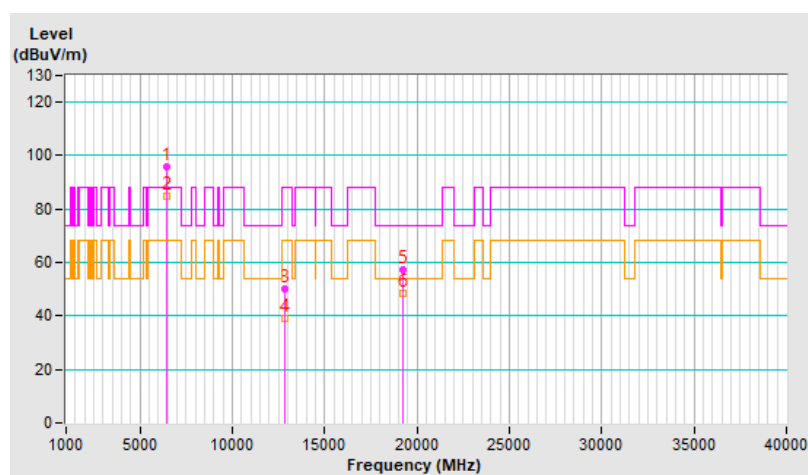


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	89.9 PK			1.50 H	176	82.5	7.4
2	*6535.00	80.7 AV			1.50 H	176	73.3	7.4
3	#13070.00	47.5 PK	88.2	-40.7	1.43 H	64	32.4	15.1
4	#13070.00	35.4 AV	68.2	-32.8	1.43 H	64	20.3	15.1
5	19605.00	54.5 PK	74.0	-19.5	1.92 H	359	59.3	-4.8
6	19605.00	45.9 AV	54.0	-8.1	1.92 H	359	50.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

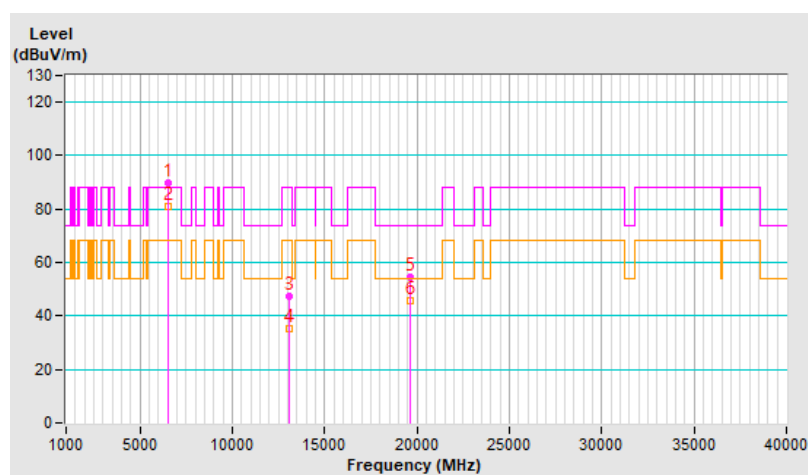


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.1 PK			1.11 V	360	88.7	7.4
2	*6535.00	84.8 AV			1.11 V	360	77.4	7.4
3	#13070.00	50.3 PK	88.2	-37.9	1.08 V	32	35.2	15.1
4	#13070.00	38.7 AV	68.2	-29.5	1.08 V	32	23.6	15.1
5	19605.00	57.3 PK	74.0	-16.7	1.99 V	347	62.1	-4.8
6	19605.00	48.2 AV	54.0	-5.8	1.99 V	347	53.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

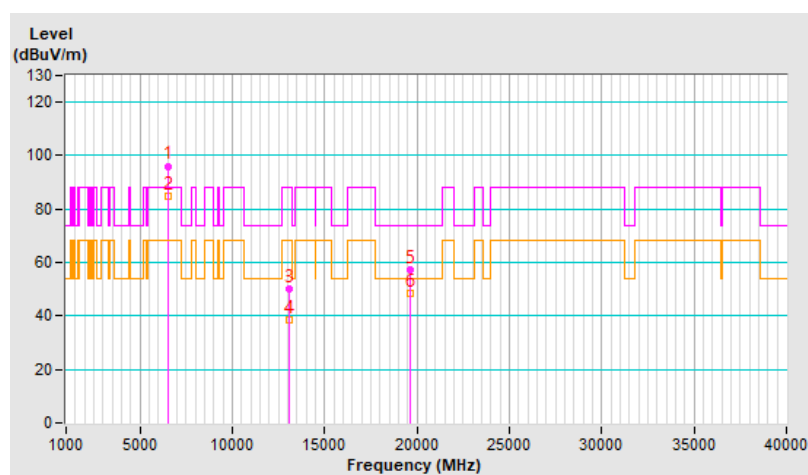


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	90.0 PK			1.51 H	157	82.3	7.7
2	*6695.00	80.8 AV			1.51 H	157	73.1	7.7
3	13390.00	46.9 PK	74.0	-27.1	1.51 H	57	31.5	15.4
4	13390.00	35.0 AV	54.0	-19.0	1.51 H	57	19.6	15.4
5	20085.00	53.9 PK	74.0	-20.1	1.91 H	351	58.2	-4.3
6	20085.00	45.4 AV	54.0	-8.6	1.91 H	351	49.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

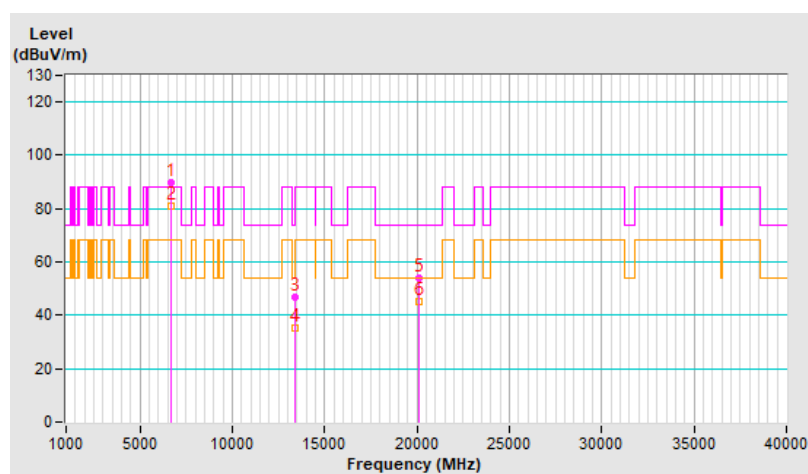


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.0 PK			1.18 V	360	88.3	7.7
2	*6695.00	84.7 AV			1.18 V	360	77.0	7.7
3	13390.00	49.9 PK	74.0	-24.1	1.13 V	22	34.5	15.4
4	13390.00	38.6 AV	54.0	-15.4	1.13 V	22	23.2	15.4
5	20085.00	56.9 PK	74.0	-17.1	2.03 V	360	61.2	-4.3
6	20085.00	48.3 AV	54.0	-5.7	2.03 V	360	52.6	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

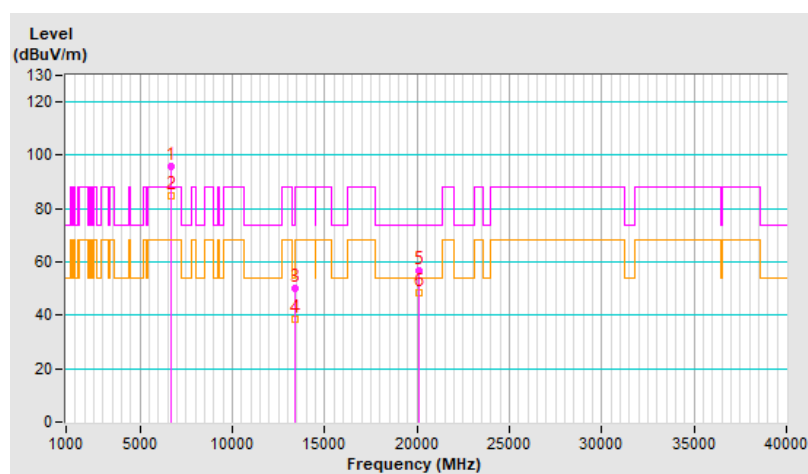


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.3 PK			2.17 H	202	86.1	8.2
2	*6855.00	82.8 AV			2.17 H	202	74.6	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.50 H	68	30.7	16.3
4	#13710.00	35.2 AV	68.2	-33.0	1.50 H	68	18.9	16.3
5	20565.00	54.0 PK	74.0	-20.0	1.90 H	360	57.7	-3.7
6	20565.00	45.8 AV	54.0	-8.2	1.90 H	360	49.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

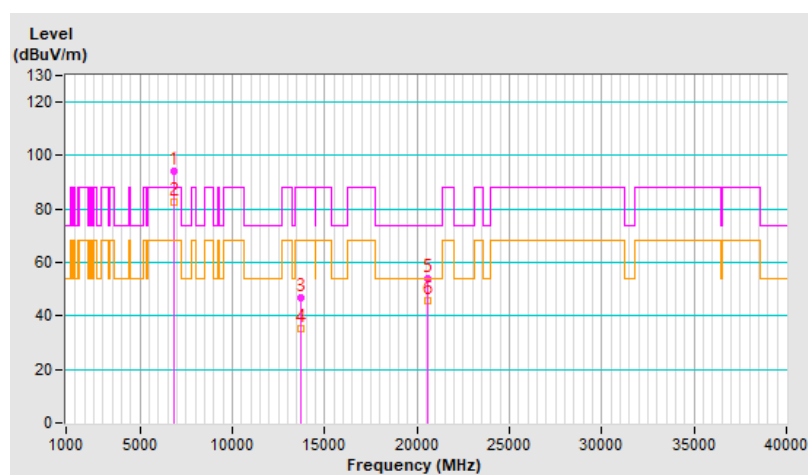


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.9 PK			1.72 V	338	85.7	8.2
2	*6855.00	82.5 AV			1.72 V	338	74.3	8.2
3	#13710.00	49.6 PK	88.2	-38.6	1.07 V	37	33.3	16.3
4	#13710.00	38.5 AV	68.2	-29.7	1.07 V	37	22.2	16.3
5	20565.00	57.1 PK	74.0	-16.9	1.99 V	347	60.8	-3.7
6	20565.00	48.4 AV	54.0	-5.6	1.99 V	347	52.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

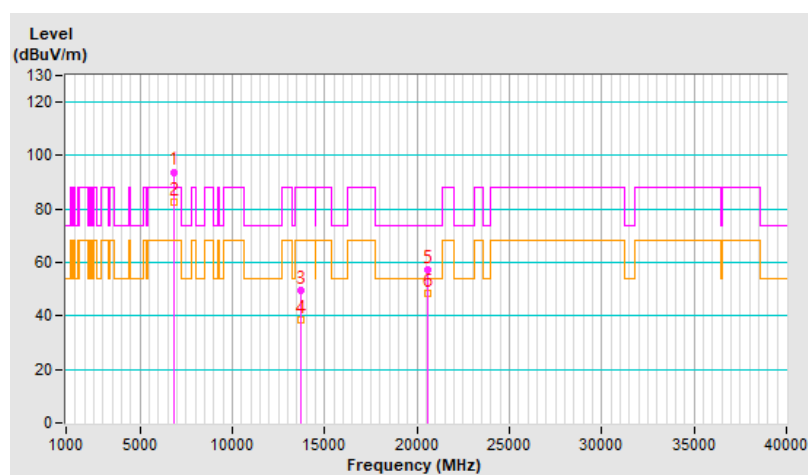


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.17 H	164	45.7	5.6
2	#5925.00	39.3 AV	68.2	-28.9	1.17 H	164	33.7	5.6
3	*5955.00	95.6 PK			1.17 H	164	90.1	5.5
4	*5955.00	85.5 AV			1.17 H	164	80.0	5.5
5	11910.00	47.2 PK	74.0	-26.8	1.43 H	86	32.6	14.6
6	11910.00	35.6 AV	54.0	-18.4	1.43 H	86	21.0	14.6
7	17865.00	54.2 PK	74.0	-19.8	1.94 H	360	28.3	25.9
8	17865.00	45.7 AV	54.0	-8.3	1.94 H	360	19.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

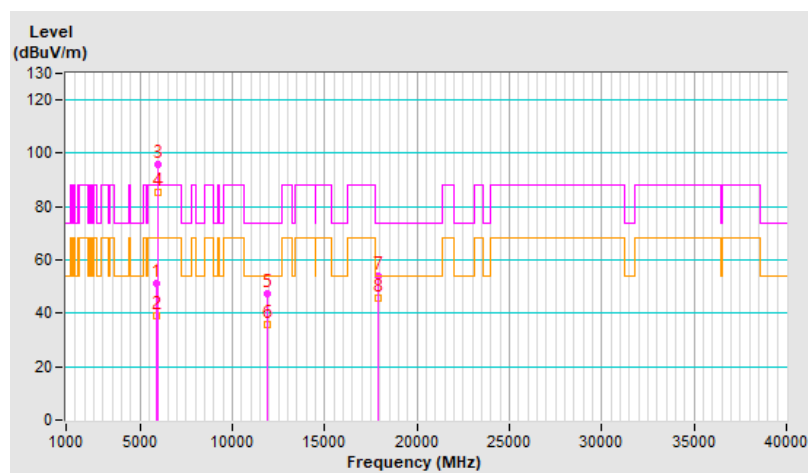


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.6 PK	88.2	-37.6	1.18 V	19	45.0	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.18 V	19	33.8	5.6
3	*5955.00	93.9 PK			1.18 V	19	88.4	5.5
4	*5955.00	84.5 AV			1.18 V	19	79.0	5.5
5	11910.00	50.3 PK	74.0	-23.7	1.06 V	36	35.7	14.6
6	11910.00	38.9 AV	54.0	-15.1	1.06 V	36	24.3	14.6
7	17865.00	57.5 PK	74.0	-16.5	1.99 V	359	31.6	25.9
8	17865.00	48.5 AV	54.0	-5.5	1.99 V	359	22.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

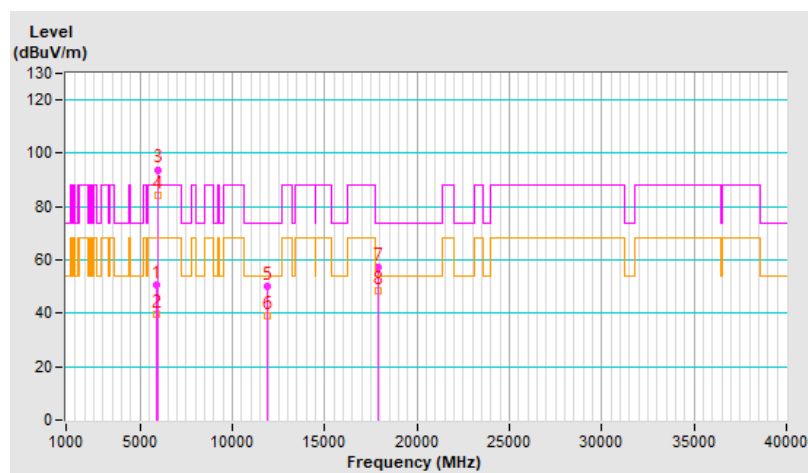


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.3 PK			1.13 H	166	88.5	6.8
2	*6415.00	85.1 AV			1.13 H	166	78.3	6.8
3	#12830.00	47.7 PK	88.2	-40.5	1.46 H	75	32.6	15.1
4	#12830.00	35.7 AV	68.2	-32.5	1.46 H	75	20.6	15.1
5	19245.00	53.4 PK	74.0	-20.6	1.94 H	352	58.0	-4.6
6	19245.00	45.1 AV	54.0	-8.9	1.94 H	352	49.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

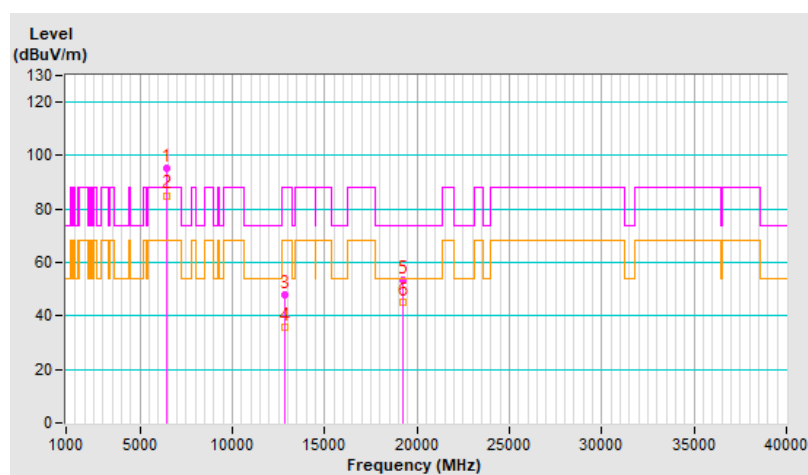


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.1 PK			1.18 V	12	86.3	6.8
2	*6415.00	84.0 AV			1.18 V	12	77.2	6.8
3	#12830.00	49.9 PK	88.2	-38.3	1.12 V	30	34.8	15.1
4	#12830.00	38.8 AV	68.2	-29.4	1.12 V	30	23.7	15.1
5	19245.00	57.6 PK	74.0	-16.4	2.01 V	353	62.2	-4.6
6	19245.00	48.7 AV	54.0	-5.3	2.01 V	353	53.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

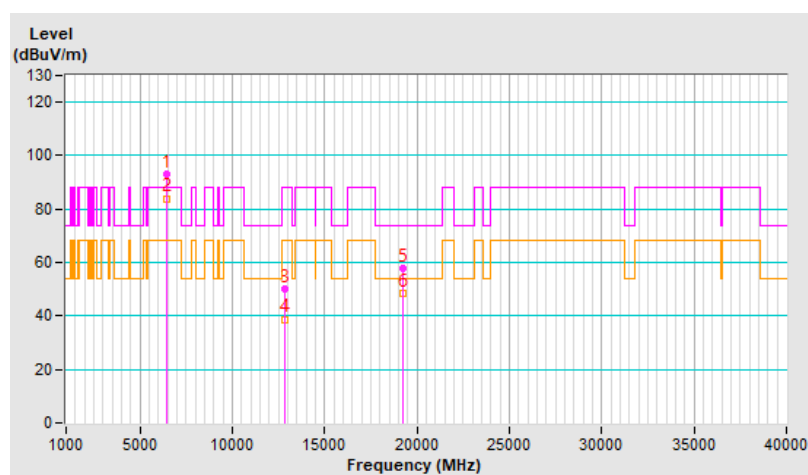


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.5 PK			1.22 H	165	88.1	7.4
2	*6535.00	85.2 AV			1.22 H	165	77.8	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.51 H	77	31.9	15.1
4	#13070.00	35.5 AV	68.2	-32.7	1.51 H	77	20.4	15.1
5	19605.00	54.0 PK	74.0	-20.0	1.89 H	360	58.8	-4.8
6	19605.00	45.5 AV	54.0	-8.5	1.89 H	360	50.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

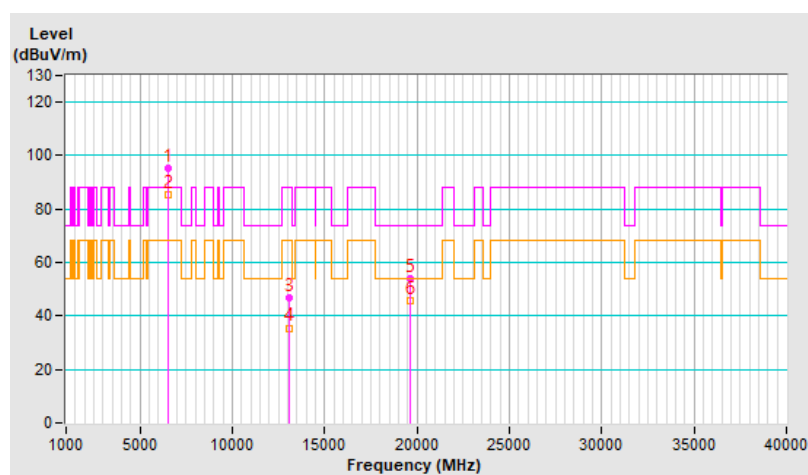


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.4 PK			1.23 V	35	87.0	7.4
2	*6535.00	84.8 AV			1.23 V	35	77.4	7.4
3	#13070.00	50.1 PK	88.2	-38.1	1.14 V	7	35.0	15.1
4	#13070.00	38.7 AV	68.2	-29.5	1.14 V	7	23.6	15.1
5	19605.00	56.6 PK	74.0	-17.4	2.01 V	350	61.4	-4.8
6	19605.00	47.8 AV	54.0	-6.2	2.01 V	350	52.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

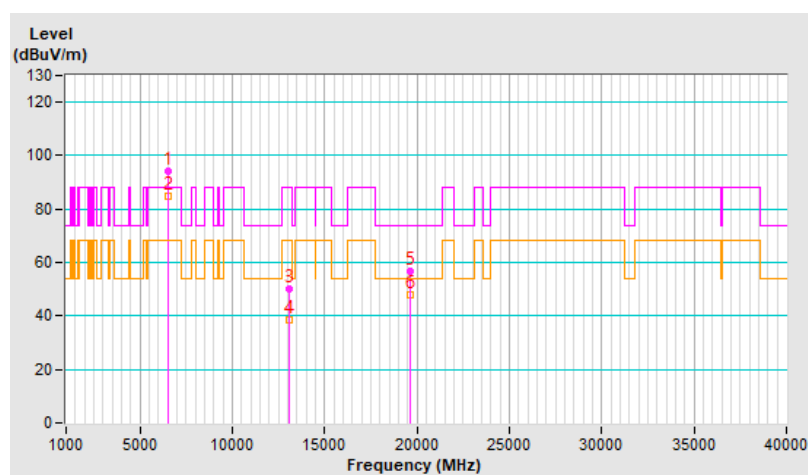


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	90.8 PK			2.15 H	202	82.6	8.2
2	*6855.00	79.5 AV			2.15 H	202	71.3	8.2
3	#13710.00	46.8 PK	88.2	-41.4	1.44 H	61	30.5	16.3
4	#13710.00	35.1 AV	68.2	-33.1	1.44 H	61	18.8	16.3
5	20565.00	53.9 PK	74.0	-20.1	1.95 H	351	57.6	-3.7
6	20565.00	45.6 AV	54.0	-8.4	1.95 H	351	49.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

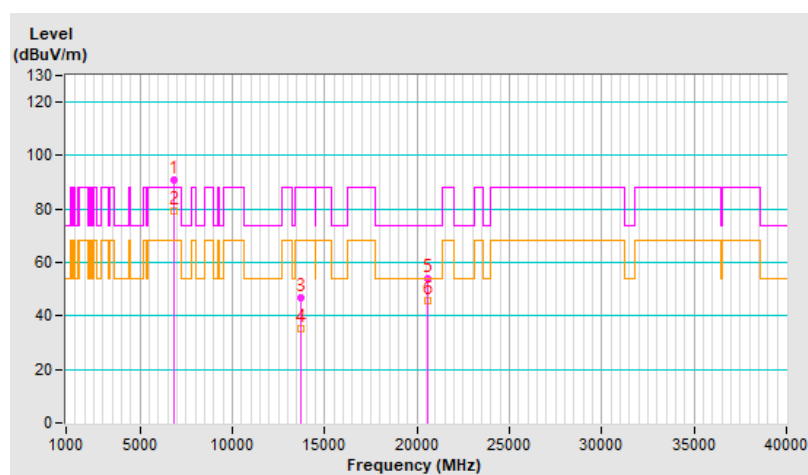


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	89.0 PK			1.71 V	341	80.8	8.2
2	*6855.00	78.0 AV			1.71 V	341	69.8	8.2
3	#13710.00	50.0 PK	88.2	-38.2	1.04 V	28	33.7	16.3
4	#13710.00	38.7 AV	68.2	-29.5	1.04 V	28	22.4	16.3
5	20565.00	57.0 PK	74.0	-17.0	2.03 V	352	60.7	-3.7
6	20565.00	48.2 AV	54.0	-5.8	2.03 V	352	51.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

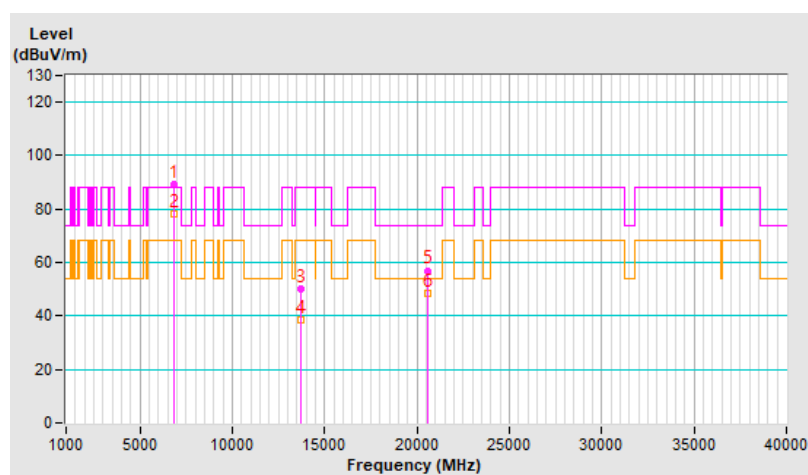


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.3 PK	88.2	-37.9	1.42 H	167	44.7	5.6
2	#5925.00	39.3 AV	68.2	-28.9	1.42 H	167	33.7	5.6
3	*5955.00	90.6 PK			1.42 H	167	85.1	5.5
4	*5955.00	81.0 AV			1.42 H	167	75.5	5.5
5	11910.00	46.5 PK	74.0	-27.5	1.47 H	69	31.9	14.6
6	11910.00	34.7 AV	54.0	-19.3	1.47 H	69	20.1	14.6
7	17865.00	53.5 PK	74.0	-20.5	1.93 H	348	27.6	25.9
8	17865.00	45.4 AV	54.0	-8.6	1.93 H	348	19.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

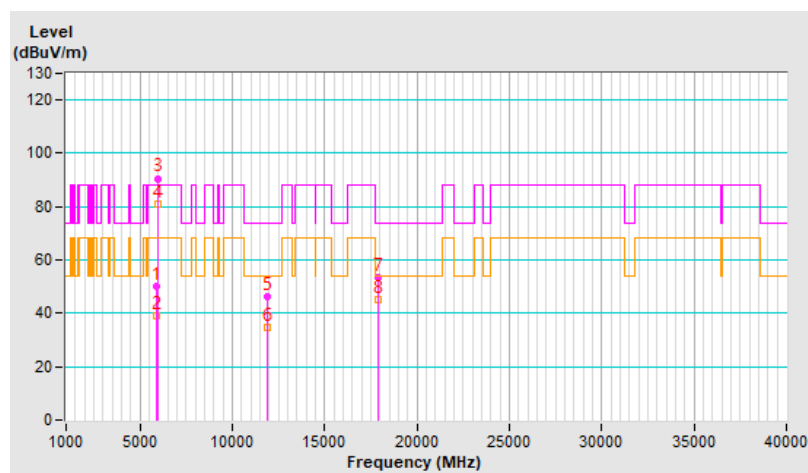


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.23 V	18	45.5	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.23 V	18	33.9	5.6
3	*5955.00	95.1 PK			1.23 V	18	89.6	5.5
4	*5955.00	84.7 AV			1.23 V	18	79.2	5.5
5	11910.00	50.8 PK	74.0	-23.2	1.16 V	11	36.2	14.6
6	11910.00	39.2 AV	54.0	-14.8	1.16 V	11	24.6	14.6
7	17865.00	56.7 PK	74.0	-17.3	1.97 V	360	30.8	25.9
8	17865.00	48.0 AV	54.0	-6.0	1.97 V	360	22.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

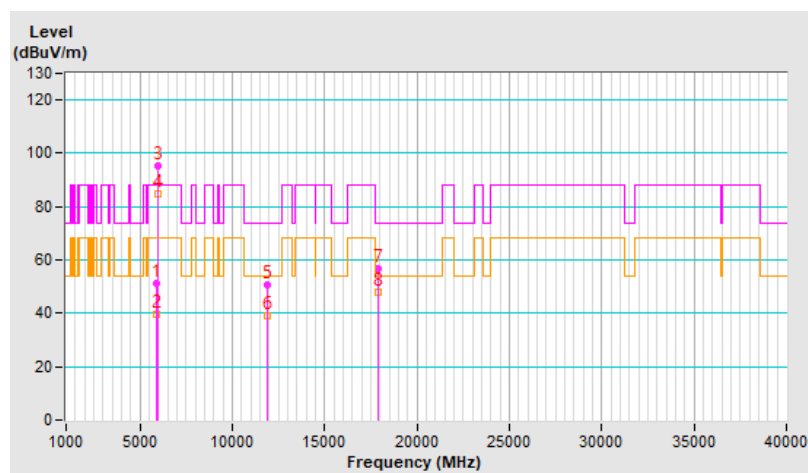


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	90.1 PK			1.36 H	176	83.3	6.8
2	*6415.00	80.5 AV			1.36 H	176	73.7	6.8
3	#12830.00	46.8 PK	88.2	-41.4	1.50 H	68	31.7	15.1
4	#12830.00	35.1 AV	68.2	-33.1	1.50 H	68	20.0	15.1
5	19245.00	53.6 PK	74.0	-20.4	1.97 H	360	58.2	-4.6
6	19245.00	45.1 AV	54.0	-8.9	1.97 H	360	49.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

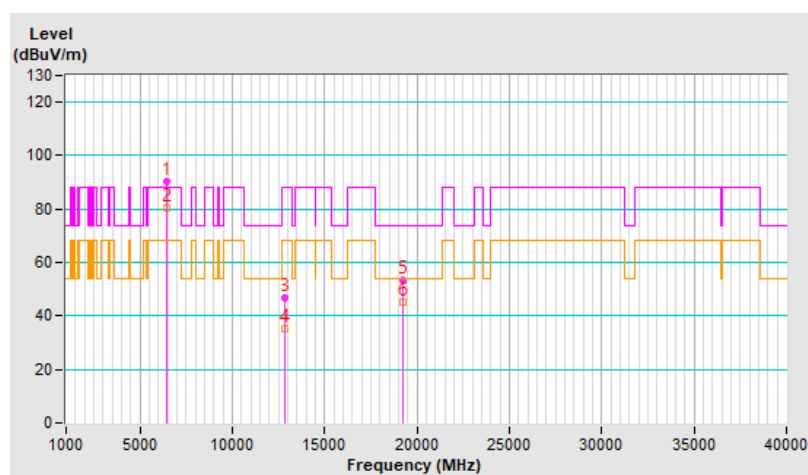


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	94.6 PK			1.24 V	13	87.8	6.8
2	*6415.00	84.3 AV			1.24 V	13	77.5	6.8
3	#12830.00	49.9 PK	88.2	-38.3	1.05 V	25	34.8	15.1
4	#12830.00	38.7 AV	68.2	-29.5	1.05 V	25	23.6	15.1
5	19245.00	57.1 PK	74.0	-16.9	2.02 V	342	61.7	-4.6
6	19245.00	48.5 AV	54.0	-5.5	2.02 V	342	53.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

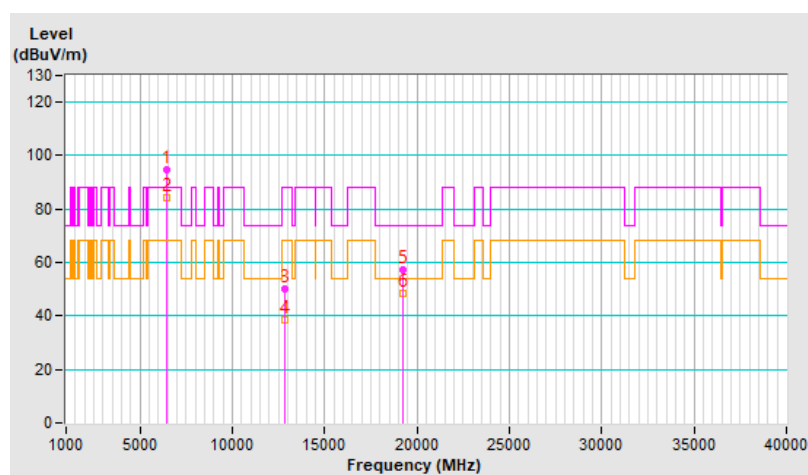


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	90.3 PK			1.38 H	183	82.9	7.4
2	*6535.00	80.8 AV			1.38 H	183	73.4	7.4
3	#13070.00	46.9 PK	88.2	-41.3	1.44 H	75	31.8	15.1
4	#13070.00	35.2 AV	68.2	-33.0	1.44 H	75	20.1	15.1
5	19605.00	53.4 PK	74.0	-20.6	1.95 H	346	58.2	-4.8
6	19605.00	45.0 AV	54.0	-9.0	1.95 H	346	49.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

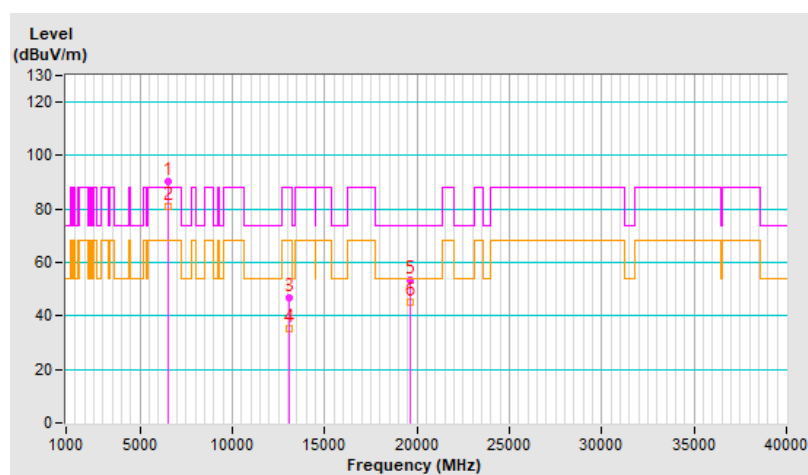


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.6 PK			1.21 V	5	87.2	7.4
2	*6535.00	84.2 AV			1.21 V	5	76.8	7.4
3	#13070.00	49.8 PK	88.2	-38.4	1.13 V	28	34.7	15.1
4	#13070.00	38.8 AV	68.2	-29.4	1.13 V	28	23.7	15.1
5	19605.00	56.7 PK	74.0	-17.3	1.96 V	351	61.5	-4.8
6	19605.00	48.0 AV	54.0	-6.0	1.96 V	351	52.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

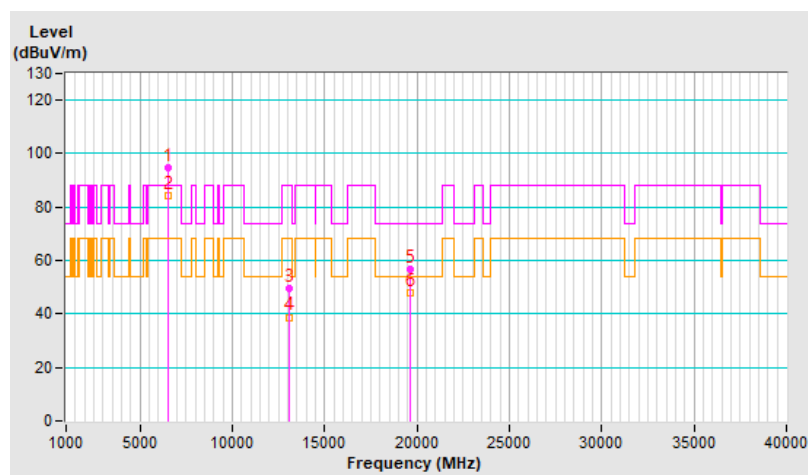


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	92.5 PK			2.16 H	201	84.3	8.2
2	*6855.00	82.3 AV			2.16 H	201	74.1	8.2
3	#13710.00	46.9 PK	88.2	-41.3	1.49 H	79	30.6	16.3
4	#13710.00	35.2 AV	68.2	-33.0	1.49 H	79	18.9	16.3
5	20565.00	53.5 PK	74.0	-20.5	1.98 H	360	57.2	-3.7
6	20565.00	45.1 AV	54.0	-8.9	1.98 H	360	48.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

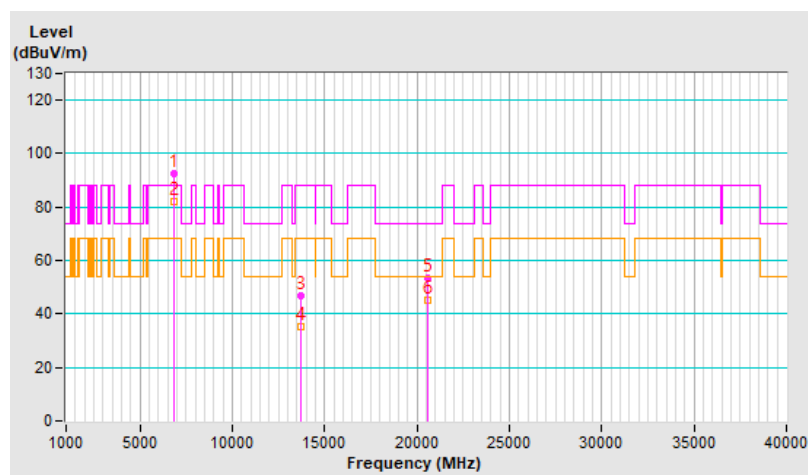


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	92.2 PK			1.58 V	7	84.0	8.2
2	*6855.00	80.1 AV			1.58 V	7	71.9	8.2
3	#13710.00	50.5 PK	88.2	-37.7	1.06 V	29	34.2	16.3
4	#13710.00	39.2 AV	68.2	-29.0	1.06 V	29	22.9	16.3
5	20565.00	57.1 PK	74.0	-16.9	1.96 V	360	60.8	-3.7
6	20565.00	48.1 AV	54.0	-5.9	1.96 V	360	51.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

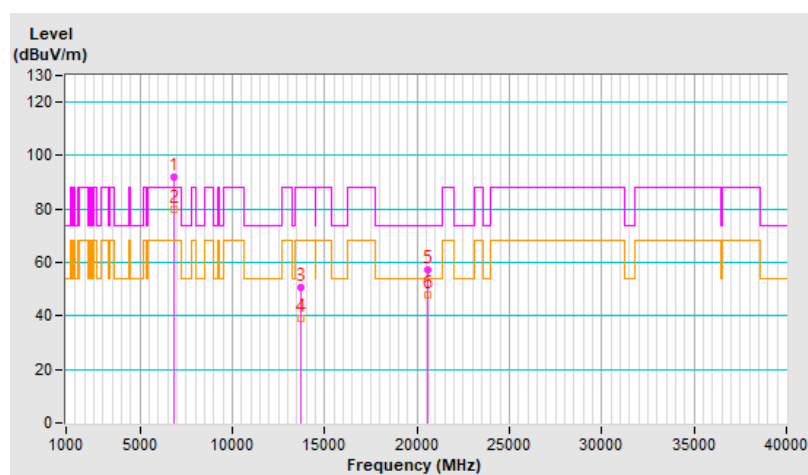


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.3 PK	88.2	-34.9	1.35 H	166	47.7	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.35 H	166	33.8	5.6
3	*5985.00	93.3 PK			1.35 H	166	87.8	5.5
4	*5985.00	80.6 AV			1.35 H	166	75.1	5.5
5	11970.00	47.4 PK	74.0	-26.6	1.42 H	76	32.9	14.5
6	11970.00	35.5 AV	54.0	-18.5	1.42 H	76	21.0	14.5
7	17955.00	54.1 PK	74.0	-19.9	1.91 H	360	25.8	28.3
8	17955.00	45.7 AV	54.0	-8.3	1.91 H	360	17.4	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

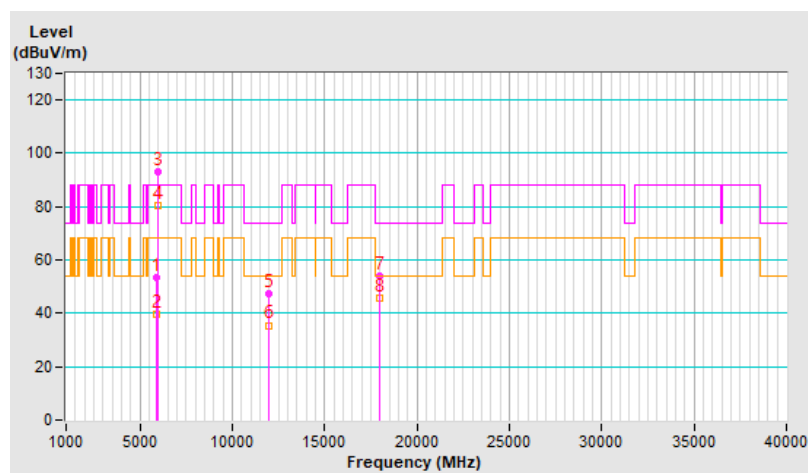


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.12 V	18	45.6	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.12 V	18	34.2	5.6
3	*5985.00	97.5 PK			1.12 V	18	92.0	5.5
4	*5985.00	84.9 AV			1.12 V	18	79.4	5.5
5	11970.00	50.7 PK	74.0	-23.3	1.13 V	32	36.2	14.5
6	11970.00	39.3 AV	54.0	-14.7	1.13 V	32	24.8	14.5
7	17955.00	56.9 PK	74.0	-17.1	2.04 V	360	28.6	28.3
8	17955.00	47.9 AV	54.0	-6.1	2.04 V	360	19.6	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

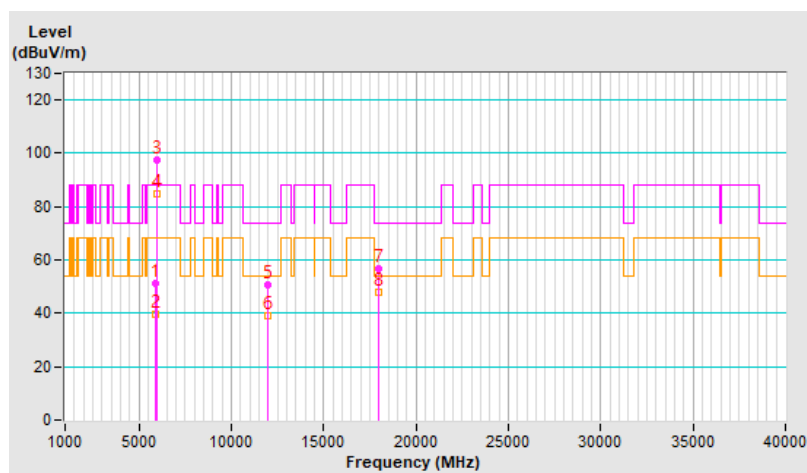


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	93.8 PK			1.35 H	176	87.2	6.6
2	*6385.00	80.8 AV			1.35 H	176	74.2	6.6
3	#12770.00	46.6 PK	88.2	-41.6	1.53 H	63	31.7	14.9
4	#12770.00	35.0 AV	68.2	-33.2	1.53 H	63	20.1	14.9
5	19155.00	53.5 PK	74.0	-20.5	1.90 H	349	58.2	-4.7
6	19155.00	45.0 AV	54.0	-9.0	1.90 H	349	49.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

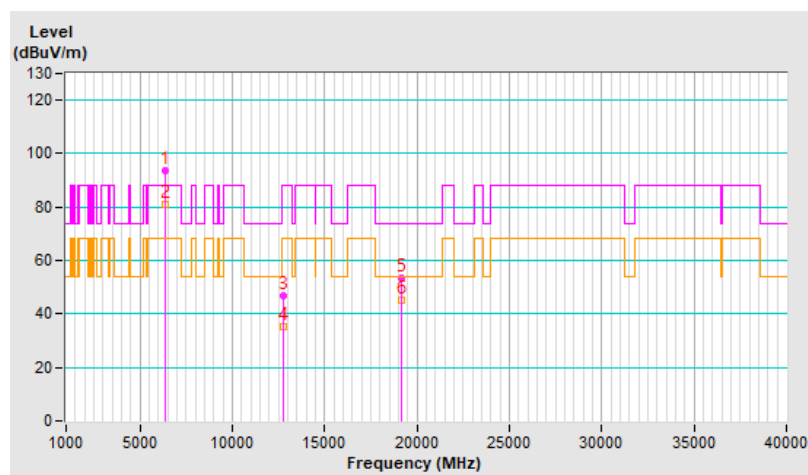


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	98.1 PK			1.18 V	15	91.5	6.6
2	*6385.00	85.2 AV			1.18 V	15	78.6	6.6
3	#12770.00	49.7 PK	88.2	-38.5	1.09 V	17	34.8	14.9
4	#12770.00	38.5 AV	68.2	-29.7	1.09 V	17	23.6	14.9
5	19155.00	56.9 PK	74.0	-17.1	1.97 V	344	61.6	-4.7
6	19155.00	47.9 AV	54.0	-6.1	1.97 V	344	52.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

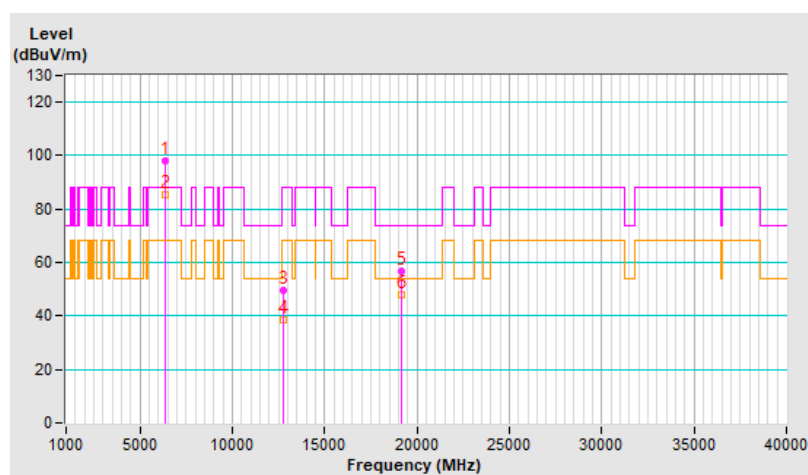


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	93.2 PK			1.35 H	154	85.4	7.8
2	*6625.00	80.4 AV			1.35 H	154	72.6	7.8
3	13250.00	47.6 PK	74.0	-26.4	1.43 H	81	32.2	15.4
4	13250.00	35.6 AV	54.0	-18.4	1.43 H	81	20.2	15.4
5	19875.00	54.0 PK	74.0	-20.0	1.98 H	351	58.5	-4.5
6	19875.00	45.3 AV	54.0	-8.7	1.98 H	351	49.8	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

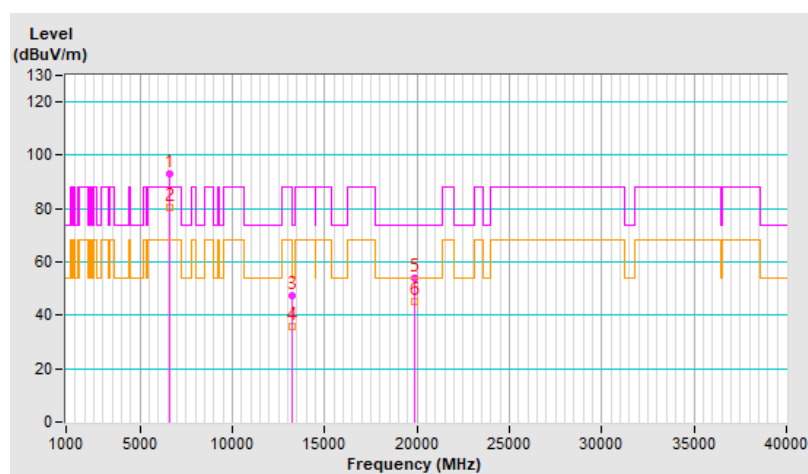


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	97.3 PK			1.12 V	9	89.5	7.8
2	*6625.00	84.8 AV			1.12 V	9	77.0	7.8
3	13250.00	50.4 PK	74.0	-23.6	1.11 V	11	35.0	15.4
4	13250.00	38.9 AV	54.0	-15.1	1.11 V	11	23.5	15.4
5	19875.00	56.9 PK	74.0	-17.1	2.00 V	360	61.4	-4.5
6	19875.00	47.9 AV	54.0	-6.1	2.00 V	360	52.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

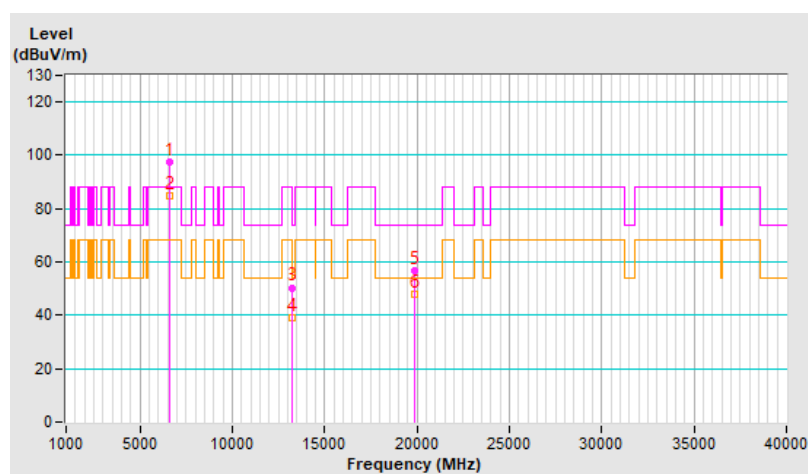


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	93.5 PK			2.12 H	203	85.8	7.7
2	*6785.00	82.9 AV			2.12 H	203	75.2	7.7
3	#13570.00	46.7 PK	88.2	-41.5	1.54 H	69	31.0	15.7
4	#13570.00	35.0 AV	68.2	-33.2	1.54 H	69	19.3	15.7
5	20355.00	54.1 PK	74.0	-19.9	1.93 H	346	57.9	-3.8
6	20355.00	45.4 AV	54.0	-8.6	1.93 H	346	49.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

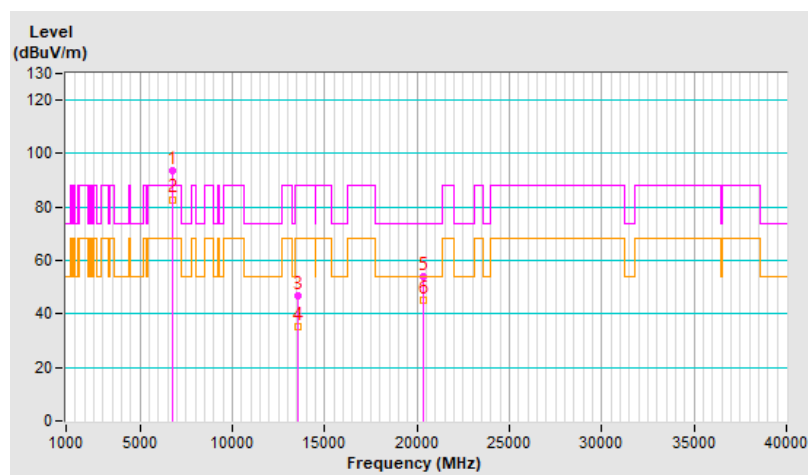


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	91.4 PK			1.09 V	149	83.7	7.7
2	*6785.00	80.4 AV			1.09 V	149	72.7	7.7
3	#13570.00	50.0 PK	88.2	-38.2	1.06 V	17	34.3	15.7
4	#13570.00	38.8 AV	68.2	-29.4	1.06 V	17	23.1	15.7
5	20355.00	57.2 PK	74.0	-16.8	1.94 V	360	61.0	-3.8
6	20355.00	48.4 AV	54.0	-5.6	1.94 V	360	52.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

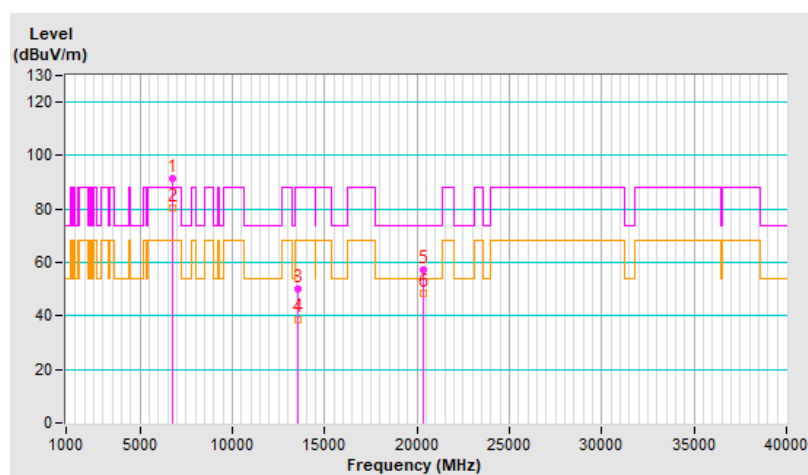


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	1.30 H	165	47.2	5.6
2	#5925.00	41.1 AV	68.2	-27.1	1.30 H	165	35.5	5.6
3	*6025.00	92.1 PK			1.30 H	165	86.5	5.6
4	*6025.00	81.1 AV			1.30 H	165	75.5	5.6
5	12050.00	47.2 PK	74.0	-26.8	1.49 H	61	32.6	14.6
6	12050.00	35.3 AV	54.0	-18.7	1.49 H	61	20.7	14.6
7	18075.00	53.7 PK	74.0	-20.3	1.96 H	360	59.0	-5.3
8	18075.00	45.6 AV	54.0	-8.4	1.96 H	360	50.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

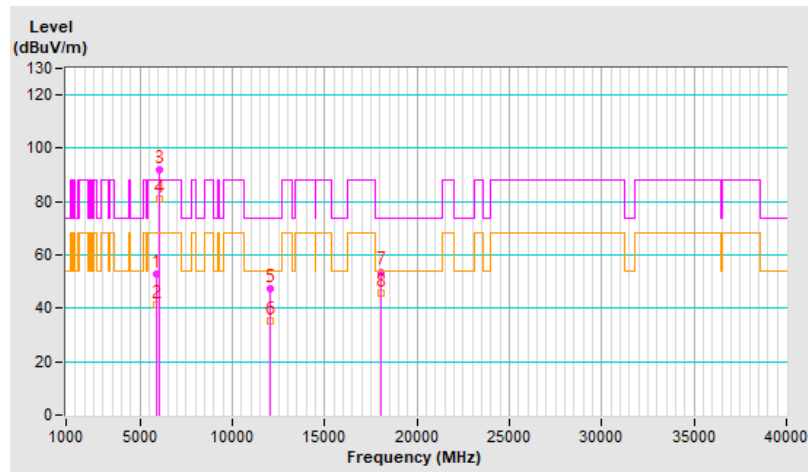


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.3 PK	88.2	-34.9	1.14 V	19	47.7	5.6
2	#5925.00	41.5 AV	68.2	-26.7	1.14 V	19	35.9	5.6
3	*6025.00	96.6 PK			1.14 V	19	91.0	5.6
4	*6025.00	84.5 AV			1.14 V	19	78.9	5.6
5	12050.00	49.4 PK	74.0	-24.6	1.05 V	25	34.8	14.6
6	12050.00	38.4 AV	54.0	-15.6	1.05 V	25	23.8	14.6
7	18075.00	56.3 PK	74.0	-17.7	1.93 V	360	61.6	-5.3
8	18075.00	47.7 AV	54.0	-6.3	1.93 V	360	53.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

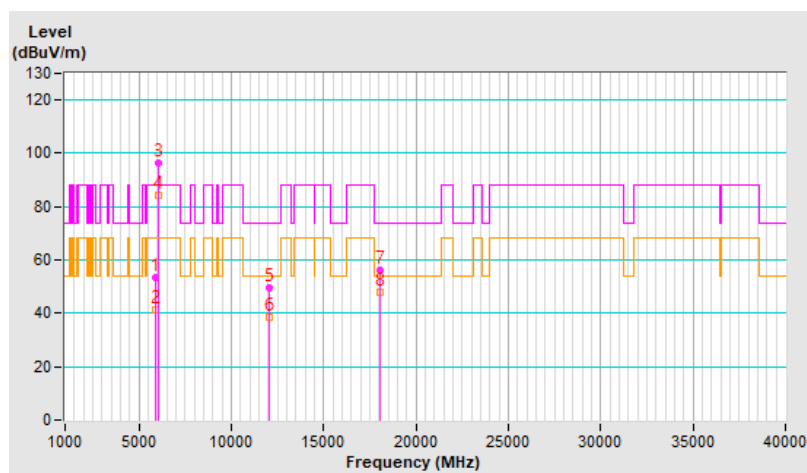


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	92.2 PK			1.33 H	171	85.8	6.4
2	*6345.00	81.5 AV			1.33 H	171	75.1	6.4
3	12690.00	47.4 PK	74.0	-26.6	1.45 H	60	32.5	14.9
4	12690.00	35.7 AV	54.0	-18.3	1.45 H	60	20.8	14.9
5	19035.00	54.0 PK	74.0	-20.0	1.95 H	360	58.9	-4.9
6	19035.00	45.8 AV	54.0	-8.2	1.95 H	360	50.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

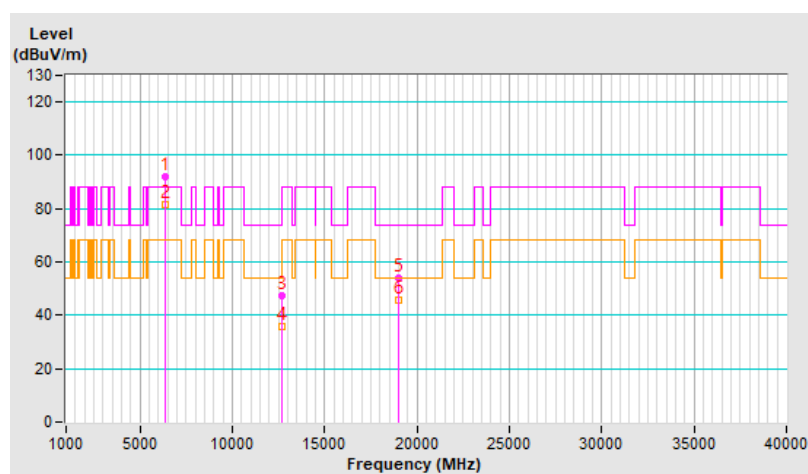


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	97.0 PK			1.17 V	17	90.6	6.4
2	*6345.00	84.9 AV			1.17 V	17	78.5	6.4
3	12690.00	49.7 PK	74.0	-24.3	1.04 V	14	34.8	14.9
4	12690.00	38.7 AV	54.0	-15.3	1.04 V	14	23.8	14.9
5	19035.00	56.4 PK	74.0	-17.6	2.02 V	360	61.3	-4.9
6	19035.00	47.9 AV	54.0	-6.1	2.02 V	360	52.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

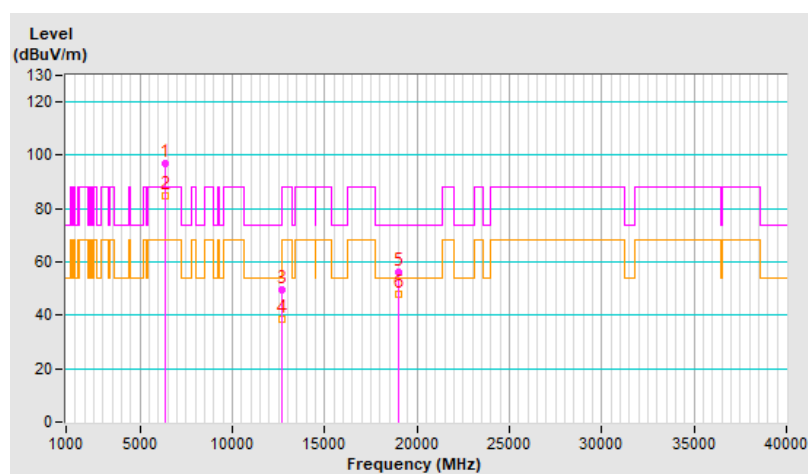


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	92.3 PK			1.36 H	350	84.5	7.8
2	*6665.00	81.3 AV			1.36 H	350	73.5	7.8
3	13330.00	46.6 PK	74.0	-27.4	1.49 H	68	31.3	15.3
4	13330.00	35.1 AV	54.0	-18.9	1.49 H	68	19.8	15.3
5	19995.00	53.2 PK	74.0	-20.8	1.95 H	360	57.6	-4.4
6	19995.00	45.0 AV	54.0	-9.0	1.95 H	360	49.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

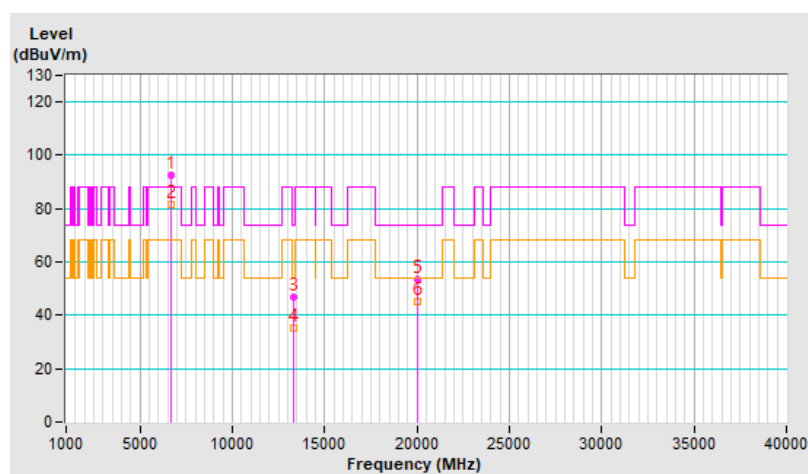


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	91.3 PK			2.20 V	357	83.5	7.8
2	*6665.00	80.9 AV			2.20 V	357	73.1	7.8
3	13330.00	49.6 PK	74.0	-24.4	1.11 V	35	34.3	15.3
4	13330.00	38.6 AV	54.0	-15.4	1.11 V	35	23.3	15.3
5	19995.00	56.7 PK	74.0	-17.3	2.01 V	360	61.1	-4.4
6	19995.00	48.1 AV	54.0	-5.9	2.01 V	360	52.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

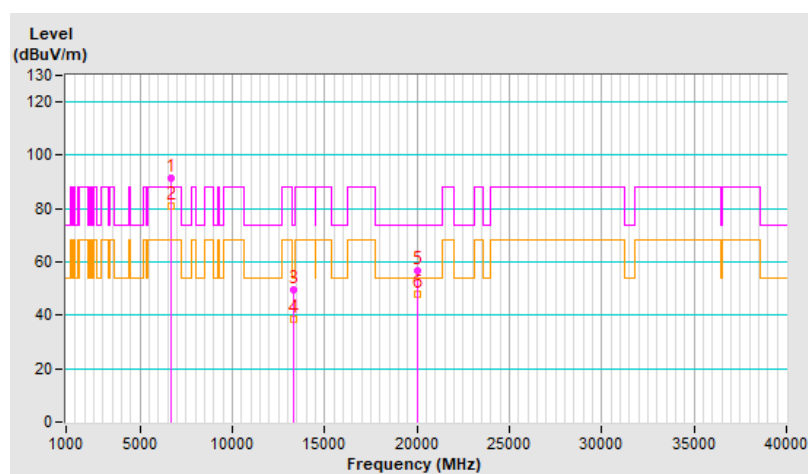


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.3 PK	88.2	-34.9	1.45 H	162	47.7	5.6
2	#5925.00	41.1 AV	68.2	-27.1	1.45 H	162	35.5	5.6
3	*6025.00	93.7 PK			1.45 H	162	88.1	5.6
4	*6025.00	82.0 AV			1.45 H	162	76.4	5.6
5	12050.00	47.1 PK	74.0	-26.9	1.44 H	61	32.5	14.6
6	12050.00	35.5 AV	54.0	-18.5	1.44 H	61	20.9	14.6
7	18075.00	54.3 PK	74.0	-19.7	1.94 H	360	59.6	-5.3
8	18075.00	45.7 AV	54.0	-8.3	1.94 H	360	51.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

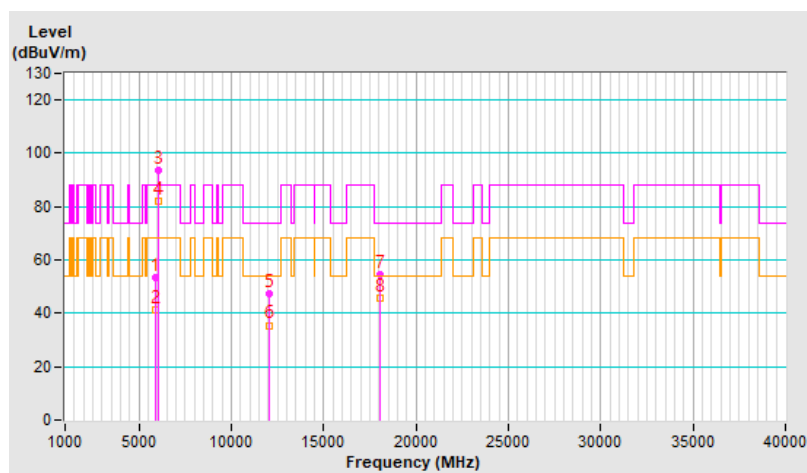


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.6 PK	88.2	-28.6	1.15 V	28	54.0	5.6
2	#5925.00	42.3 AV	68.2	-25.9	1.15 V	28	36.7	5.6
3	*6025.00	97.3 PK			1.15 V	28	91.7	5.6
4	*6025.00	85.2 AV			1.15 V	28	79.6	5.6
5	12050.00	50.1 PK	74.0	-23.9	1.05 V	16	35.5	14.6
6	12050.00	38.6 AV	54.0	-15.4	1.05 V	16	24.0	14.6
7	18075.00	57.3 PK	74.0	-16.7	1.96 V	360	62.6	-5.3
8	18075.00	48.5 AV	54.0	-5.5	1.96 V	360	53.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

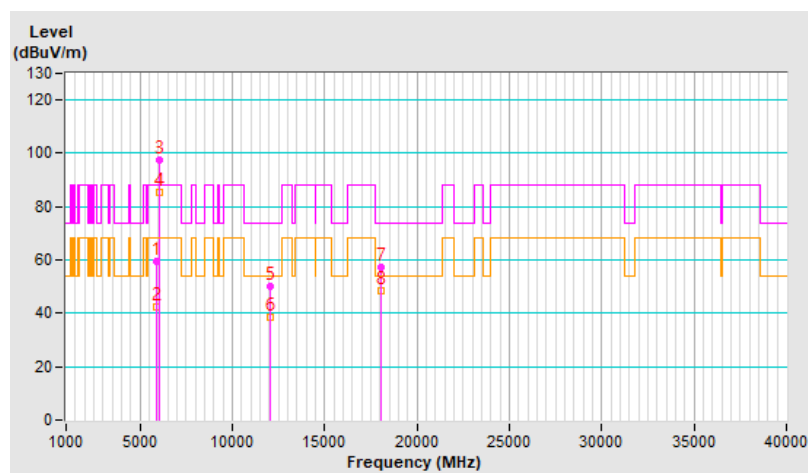


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	93.8 PK			1.40 H	156	87.4	6.4
2	*6345.00	81.8 AV			1.40 H	156	75.4	6.4
3	12690.00	47.8 PK	74.0	-26.2	1.53 H	58	32.9	14.9
4	12690.00	35.7 AV	54.0	-18.3	1.53 H	58	20.8	14.9
5	19035.00	53.6 PK	74.0	-20.4	2.00 H	360	58.5	-4.9
6	19035.00	45.0 AV	54.0	-9.0	2.00 H	360	49.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

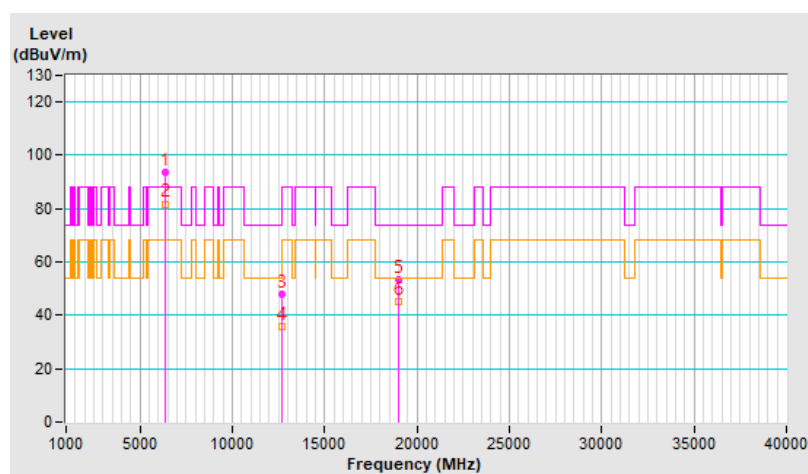


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	97.1 PK			1.16 V	34	90.7	6.4
2	*6345.00	85.2 AV			1.16 V	34	78.8	6.4
3	12690.00	50.5 PK	74.0	-23.5	1.10 V	13	35.6	14.9
4	12690.00	39.0 AV	54.0	-15.0	1.10 V	13	24.1	14.9
5	19035.00	57.3 PK	74.0	-16.7	2.04 V	345	62.2	-4.9
6	19035.00	48.7 AV	54.0	-5.3	2.04 V	345	53.6	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

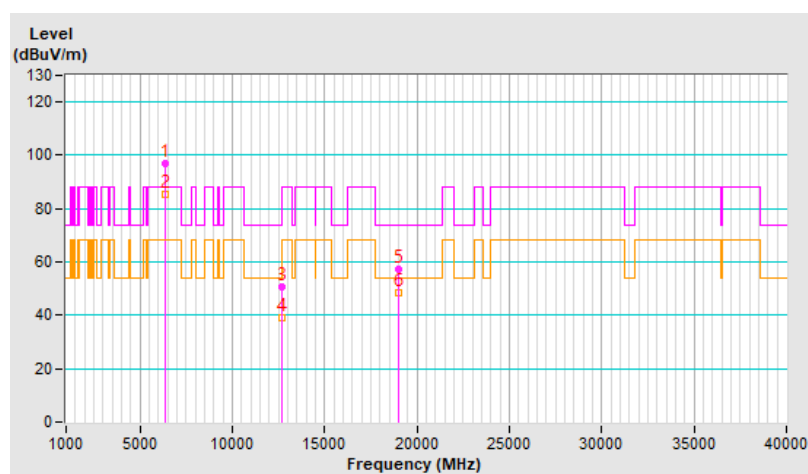


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	97.4 PK			2.15 H	200	89.6	7.8
2	*6665.00	84.4 AV			2.15 H	200	76.6	7.8
3	13330.00	46.6 PK	74.0	-27.4	1.50 H	80	31.3	15.3
4	13330.00	35.0 AV	54.0	-19.0	1.50 H	80	19.7	15.3
5	19995.00	53.4 PK	74.0	-20.6	2.00 H	360	57.8	-4.4
6	19995.00	45.1 AV	54.0	-8.9	2.00 H	360	49.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

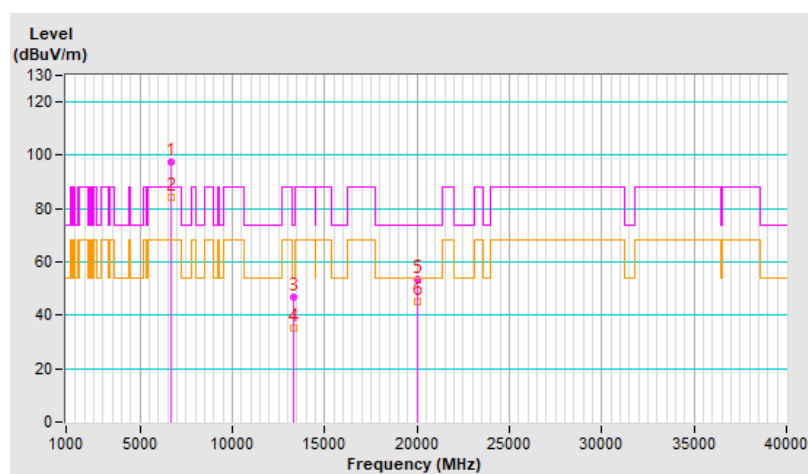


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	92.6 PK			2.20 V	357	84.8	7.8
2	*6665.00	81.5 AV			2.20 V	357	73.7	7.8
3	13330.00	50.7 PK	74.0	-23.3	1.11 V	33	35.4	15.3
4	13330.00	39.3 AV	54.0	-14.7	1.11 V	33	24.0	15.3
5	19995.00	56.8 PK	74.0	-17.2	1.94 V	351	61.2	-4.4
6	19995.00	47.8 AV	54.0	-6.2	1.94 V	351	52.2	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

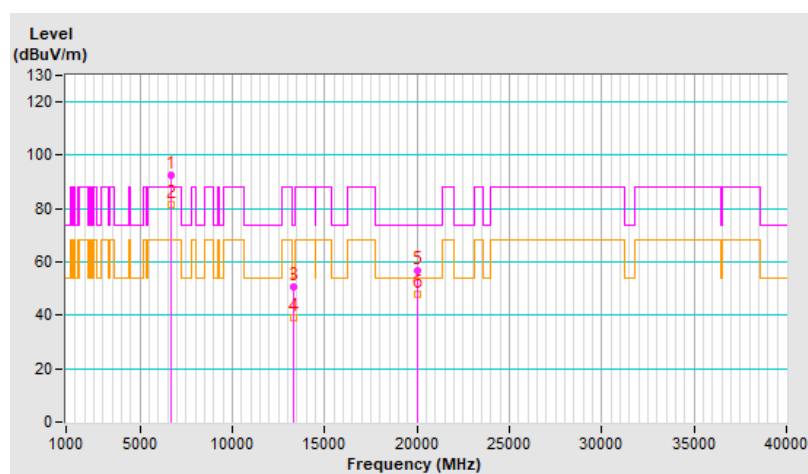


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11a Channel 1

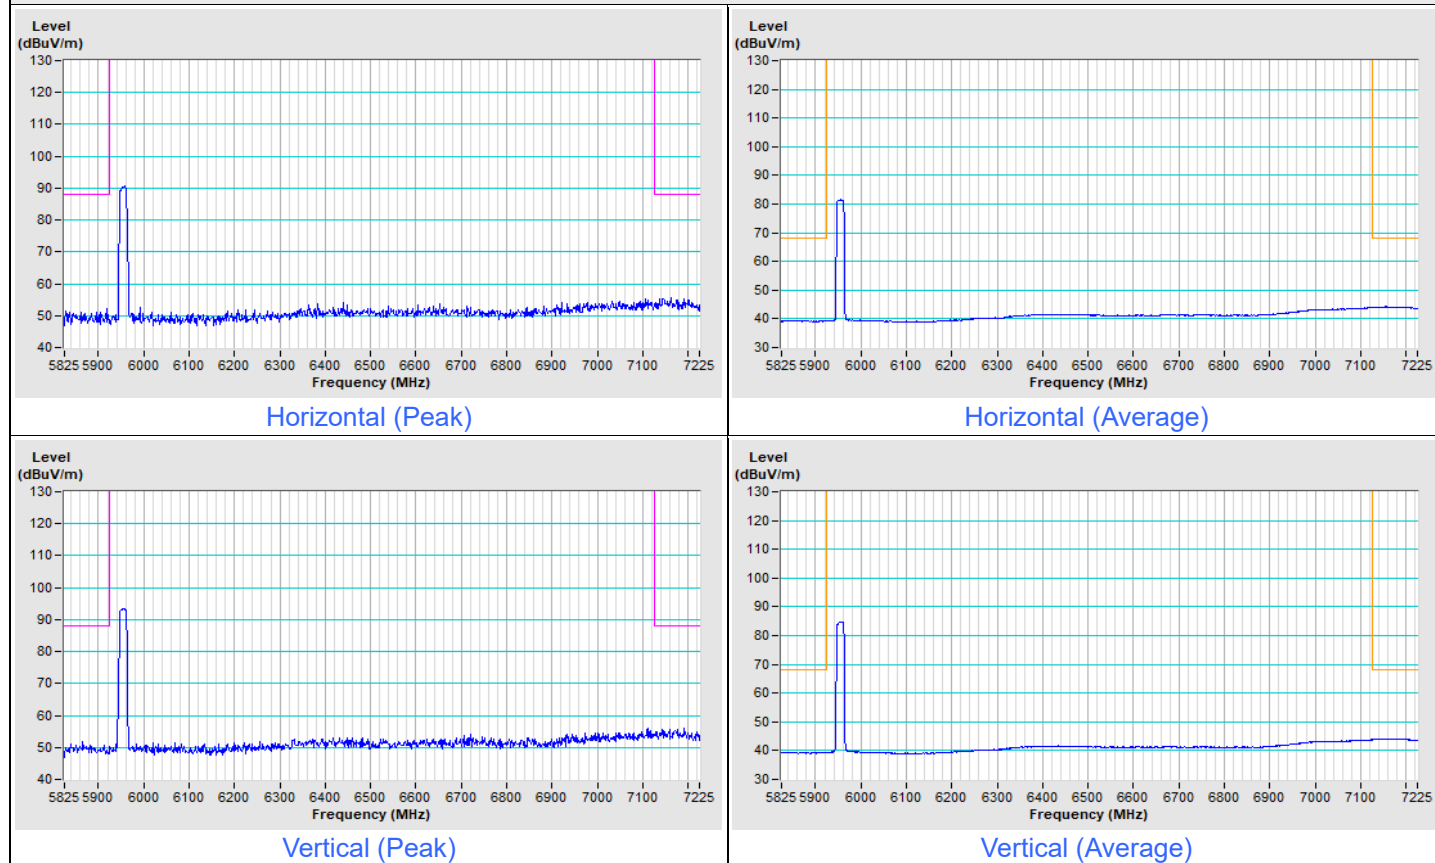


802.11a Channel 181

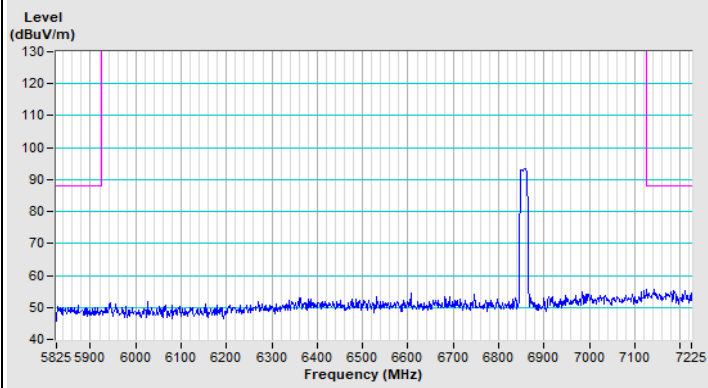


Horizontal (Peak)

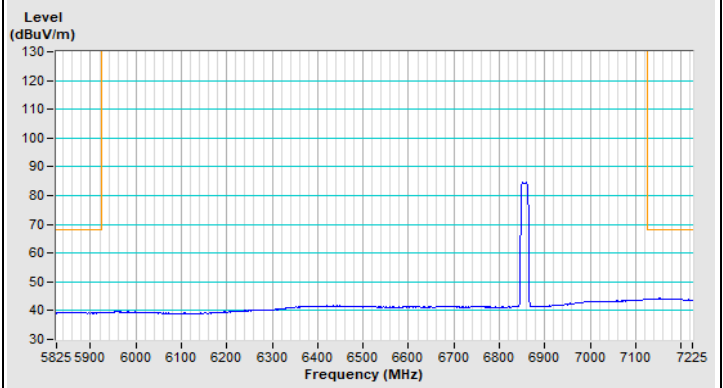

Horizontal (Average)

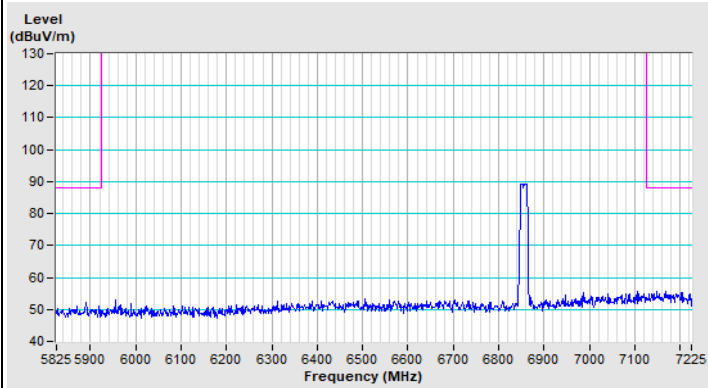


Vertical (Peak)

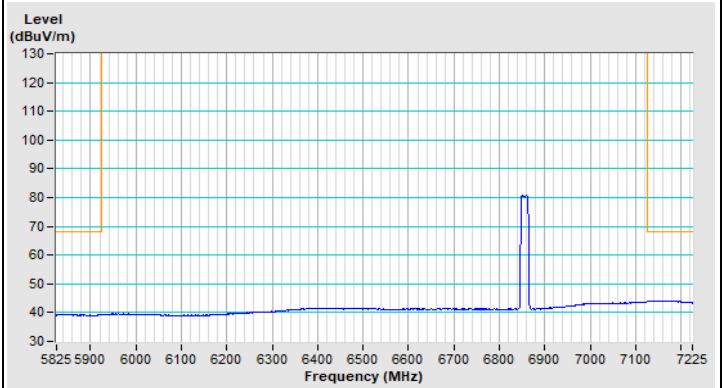


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) Channel 1

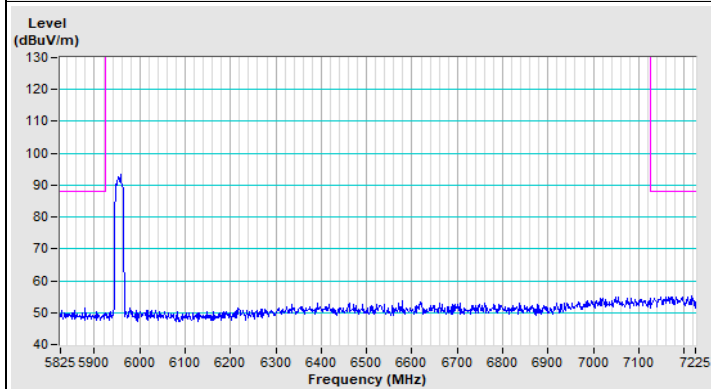


Horizontal (Peak)

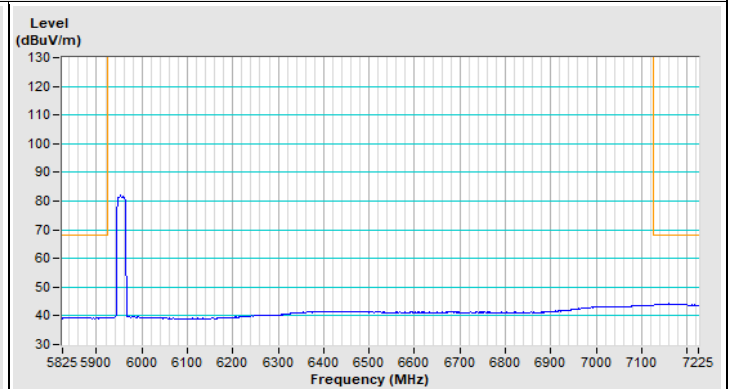

Horizontal (Average)

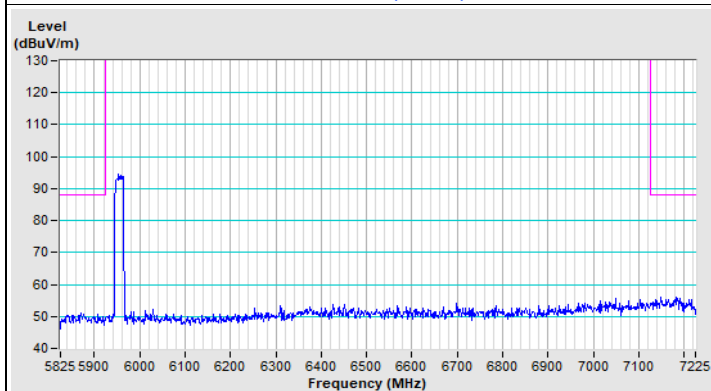


Vertical (Peak)

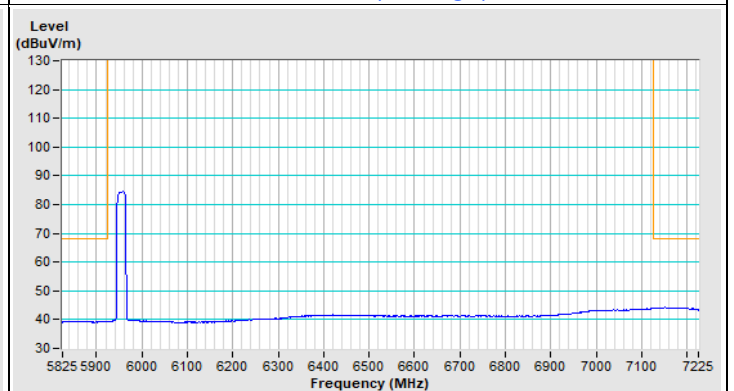


Vertical (Average)


802.11be (EHT20) Channel 181

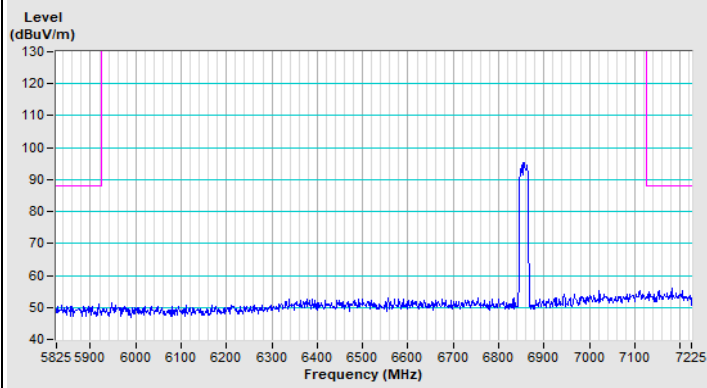


Horizontal (Peak)

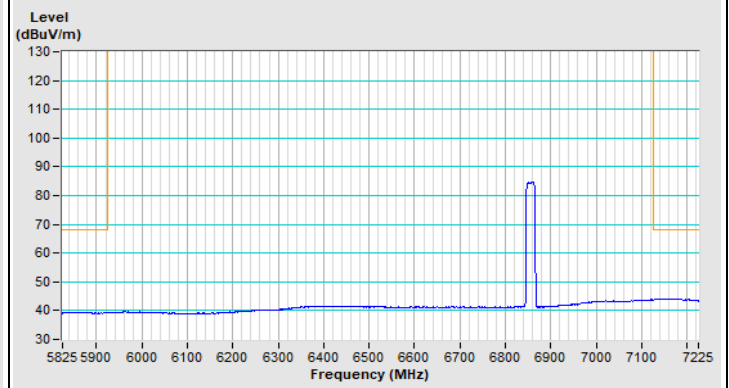

Horizontal (Average)

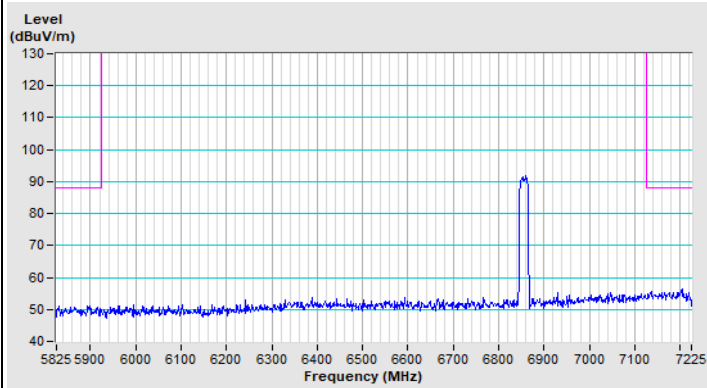


Vertical (Peak)

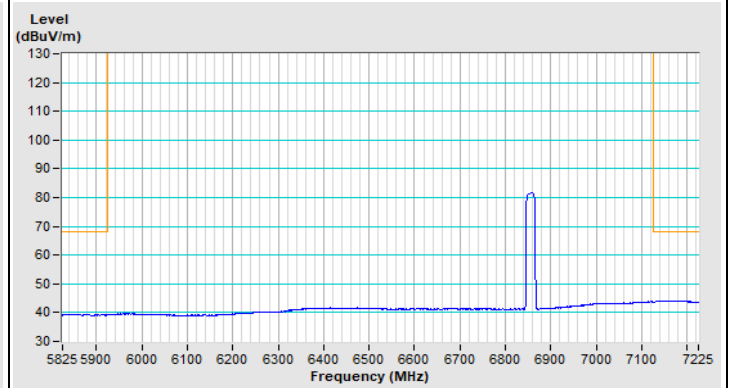


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 3

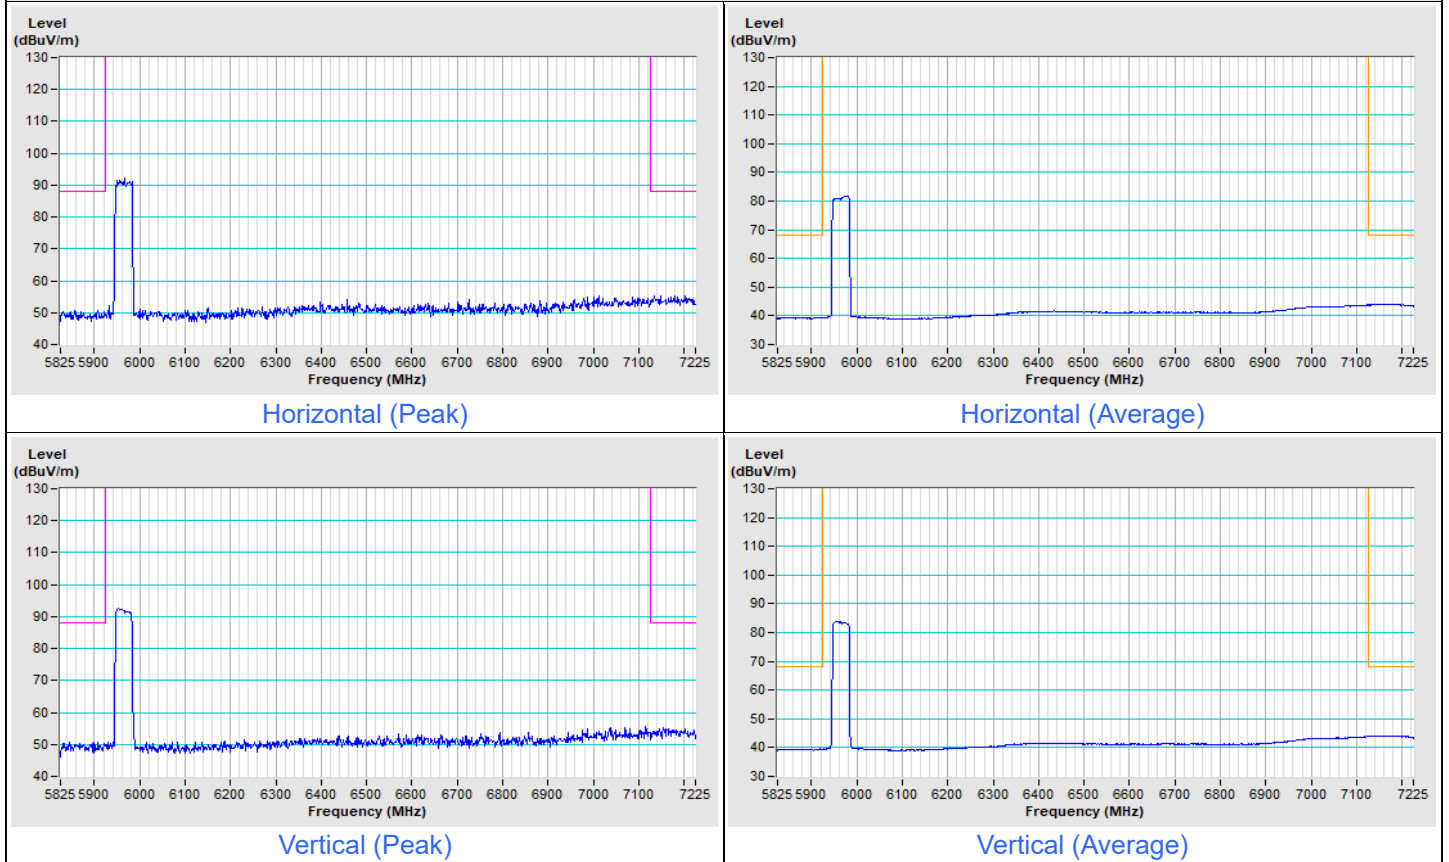


802.11be (EHT40) Channel 179

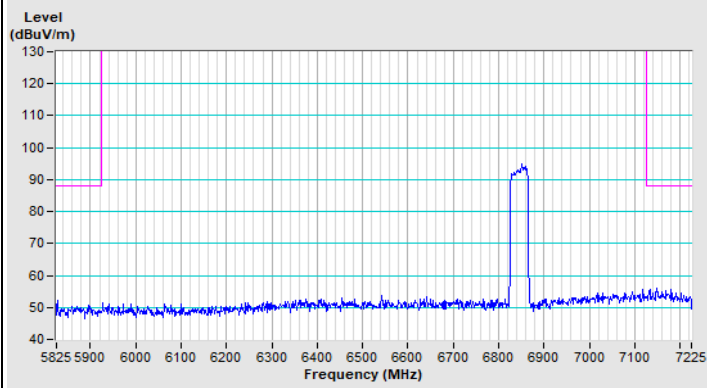


Horizontal (Peak)

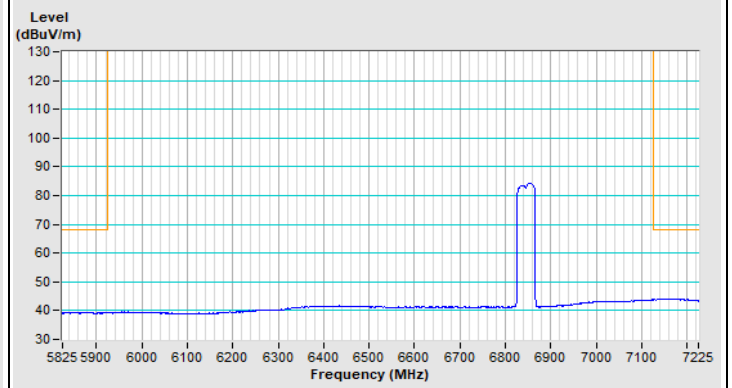

Horizontal (Average)

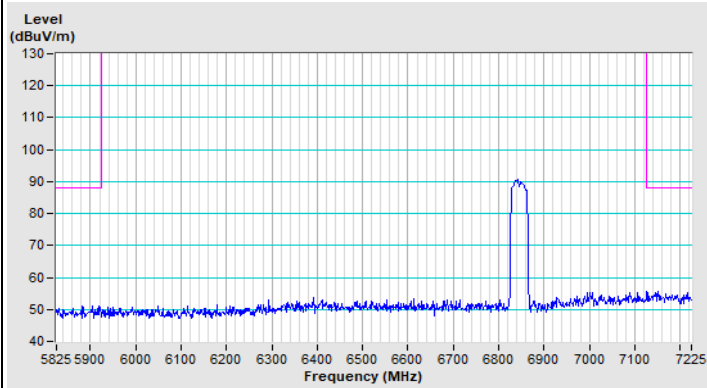


Vertical (Peak)

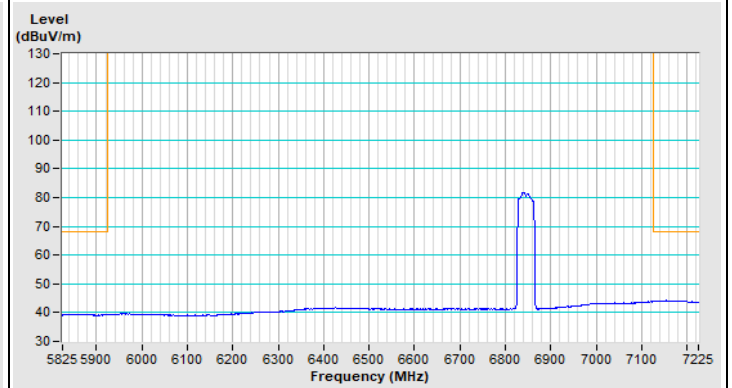


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 7

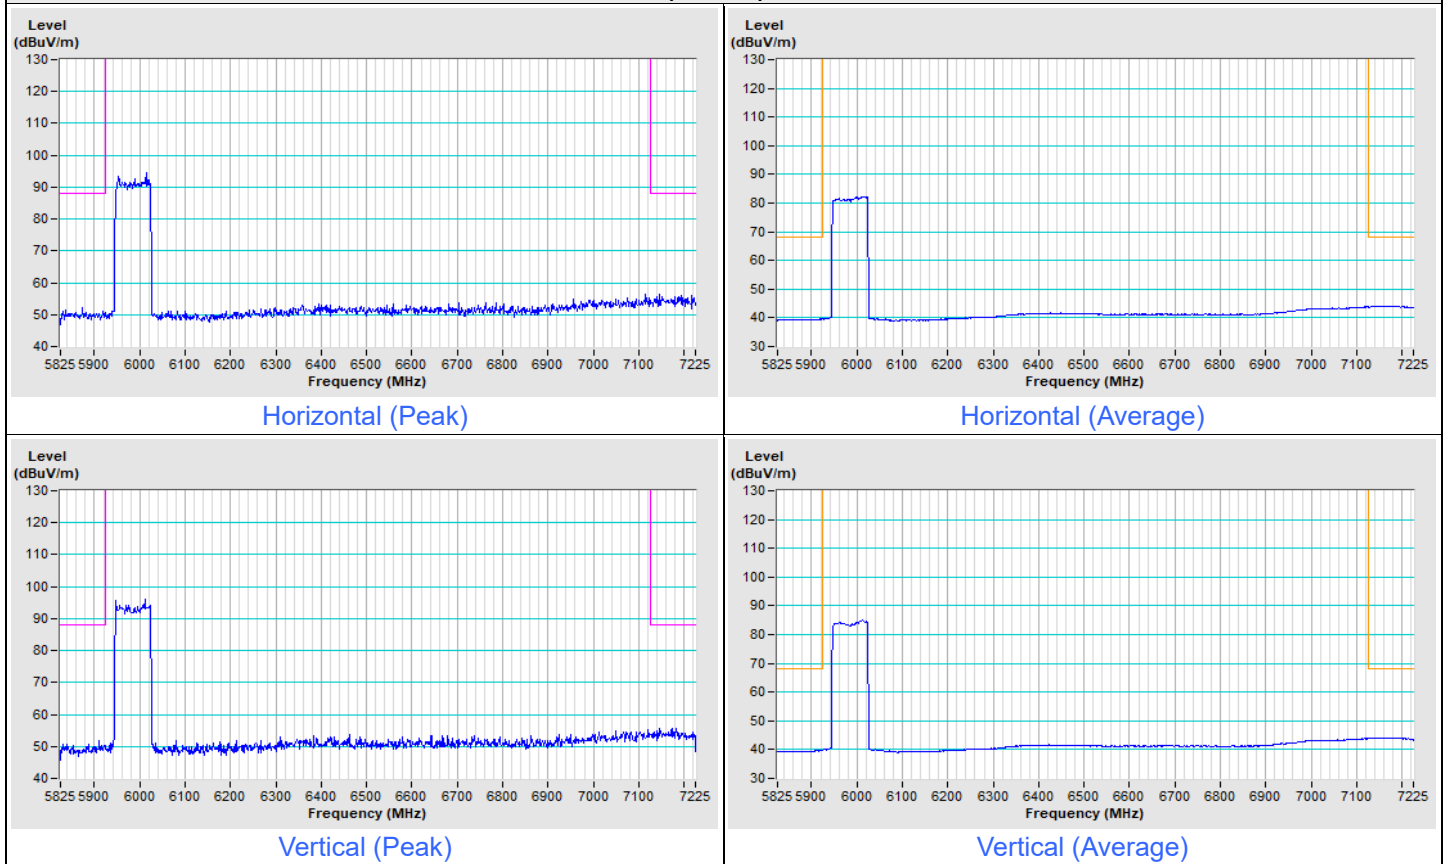


802.11be (EHT80) Channel 167

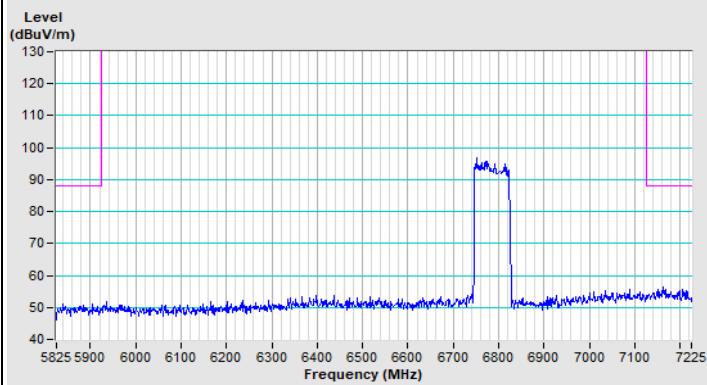


Horizontal (Peak)

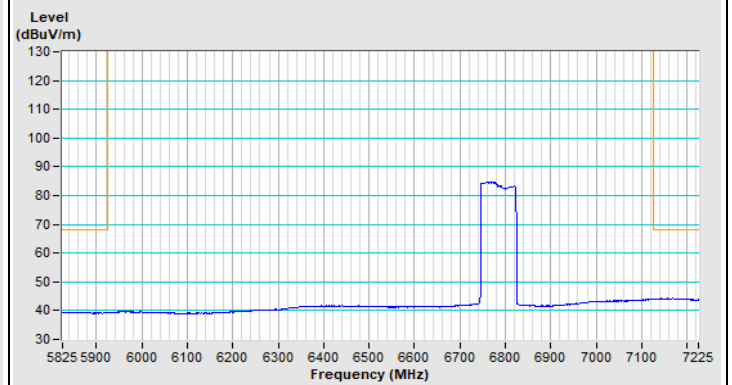

Horizontal (Average)

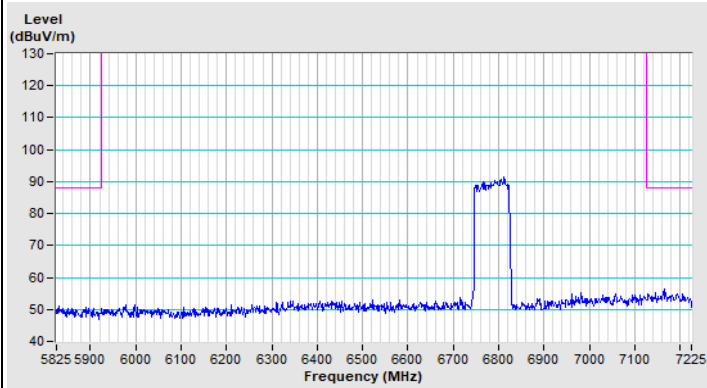


Vertical (Peak)

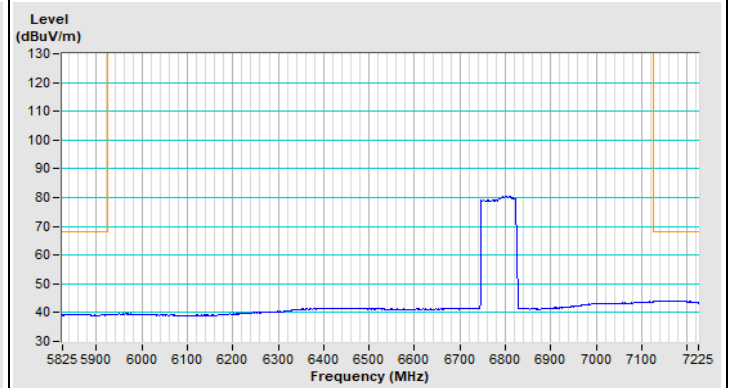


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 15

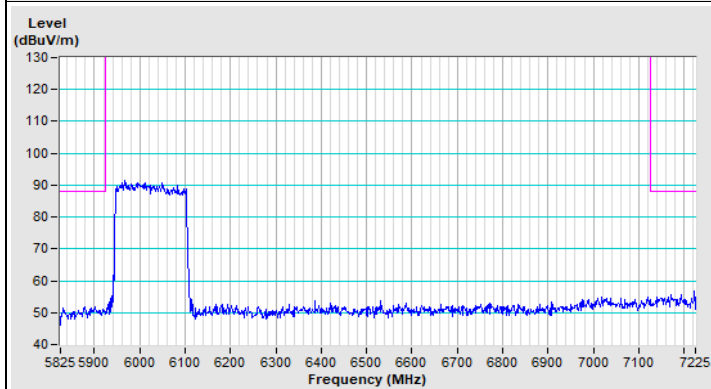


Horizontal (Peak)

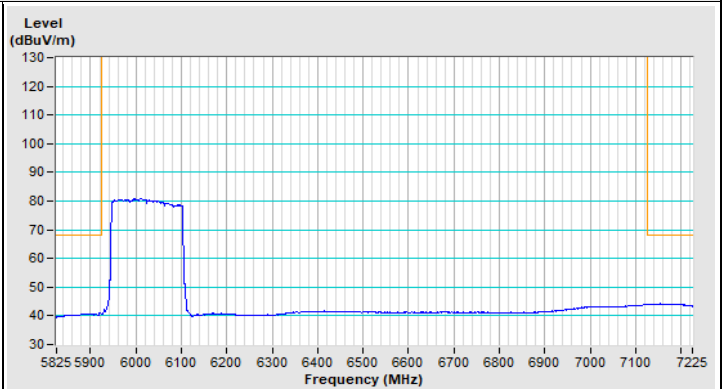

Horizontal (Average)

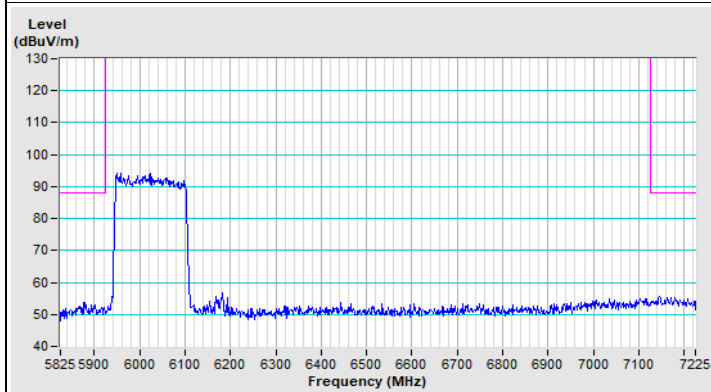


Vertical (Peak)

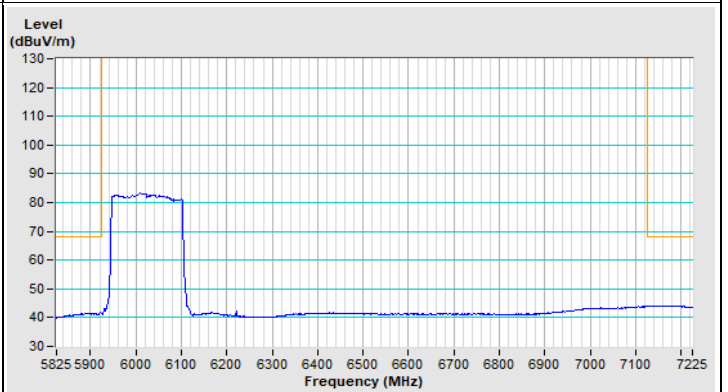


Vertical (Average)


802.11be (EHT160) Channel 143

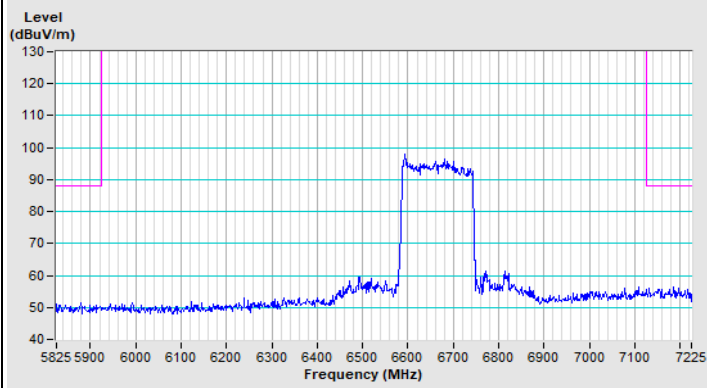


Horizontal (Peak)

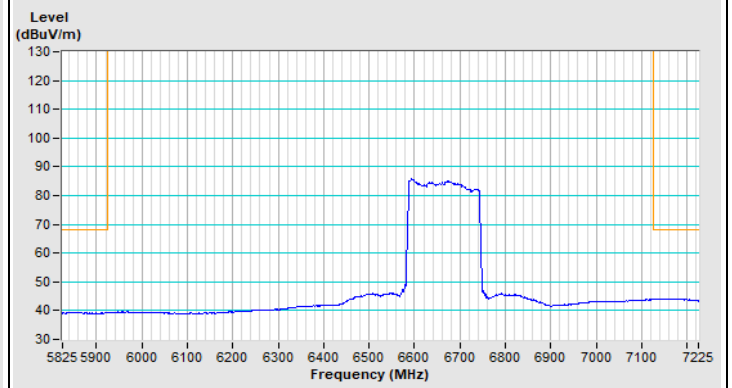

Horizontal (Average)

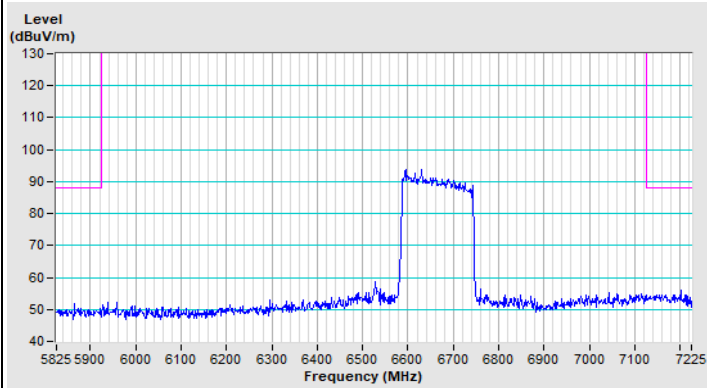


Vertical (Peak)

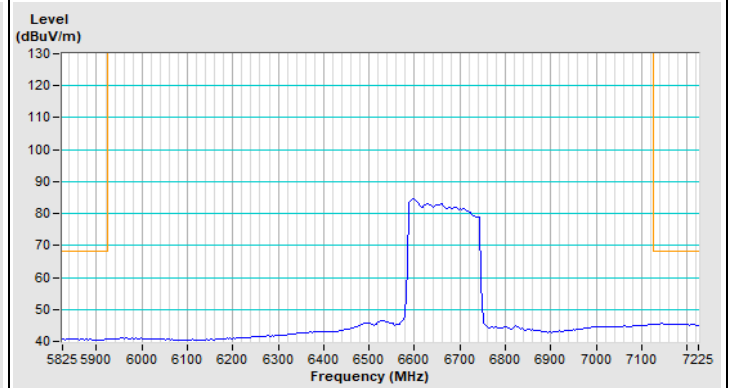


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

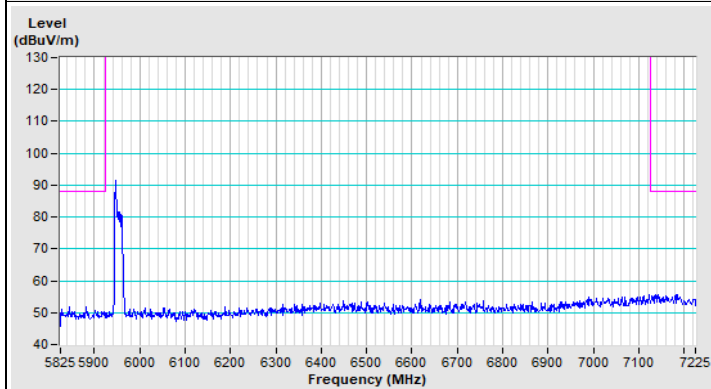


Horizontal (Peak)

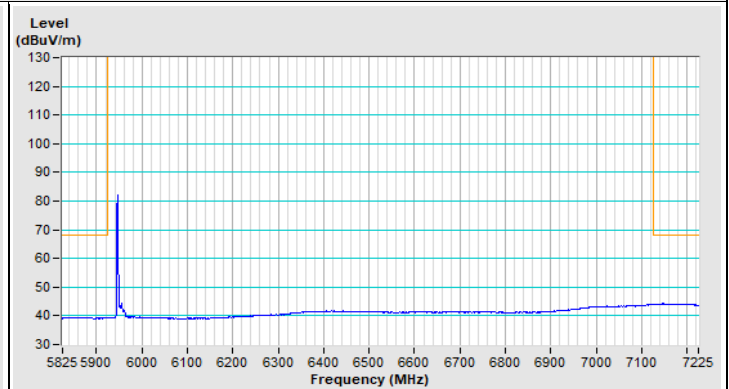


Horizontal (Average)

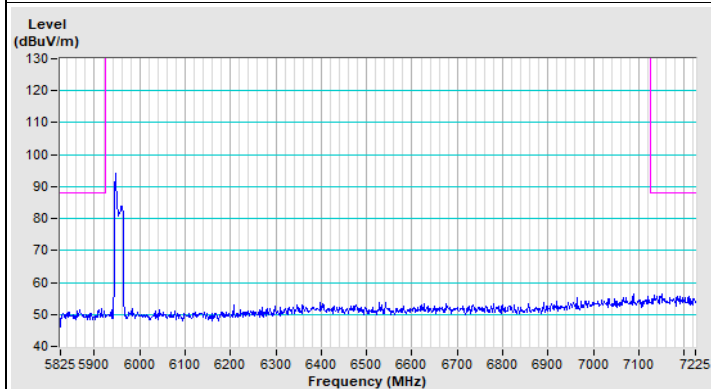


Vertical (Peak)

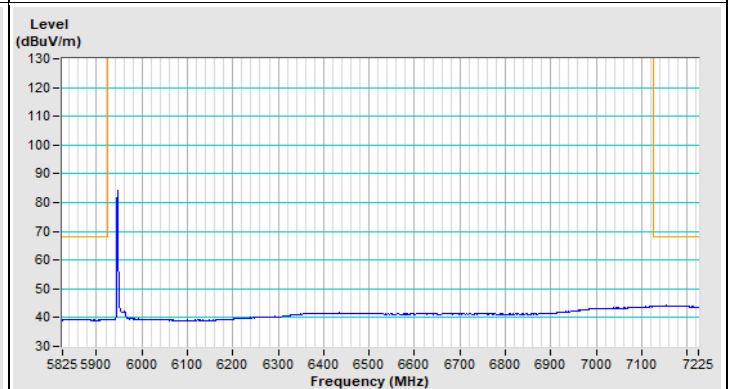


Vertical (Average)

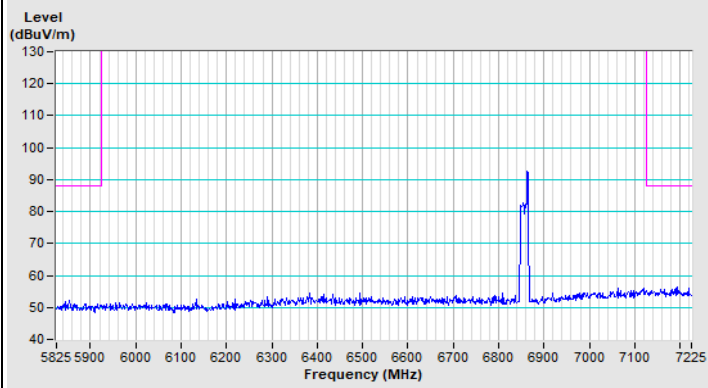802.11be (EHT20) 26-tone RU Channel 181


Horizontal (Peak)

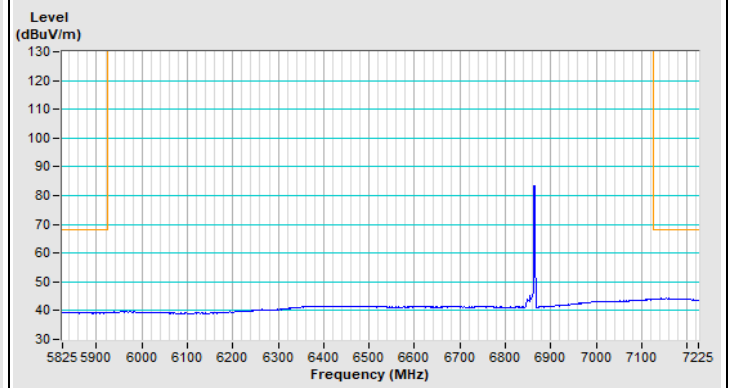

Horizontal (Average)

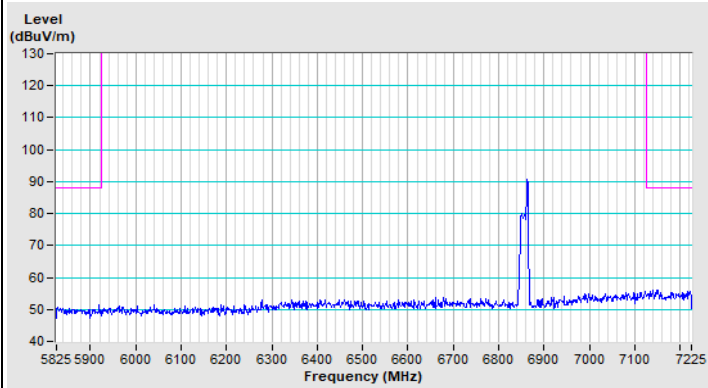


Vertical (Peak)

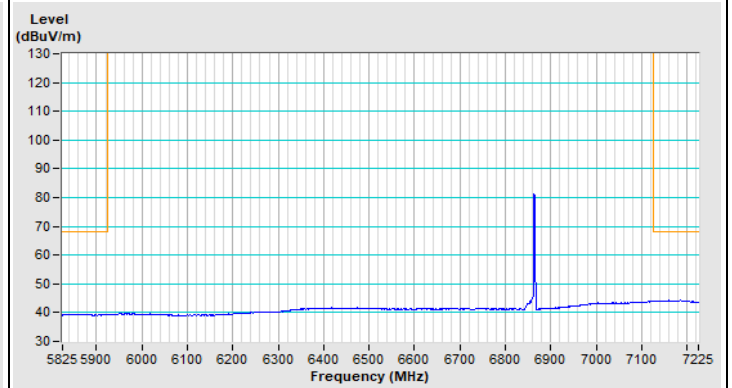


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

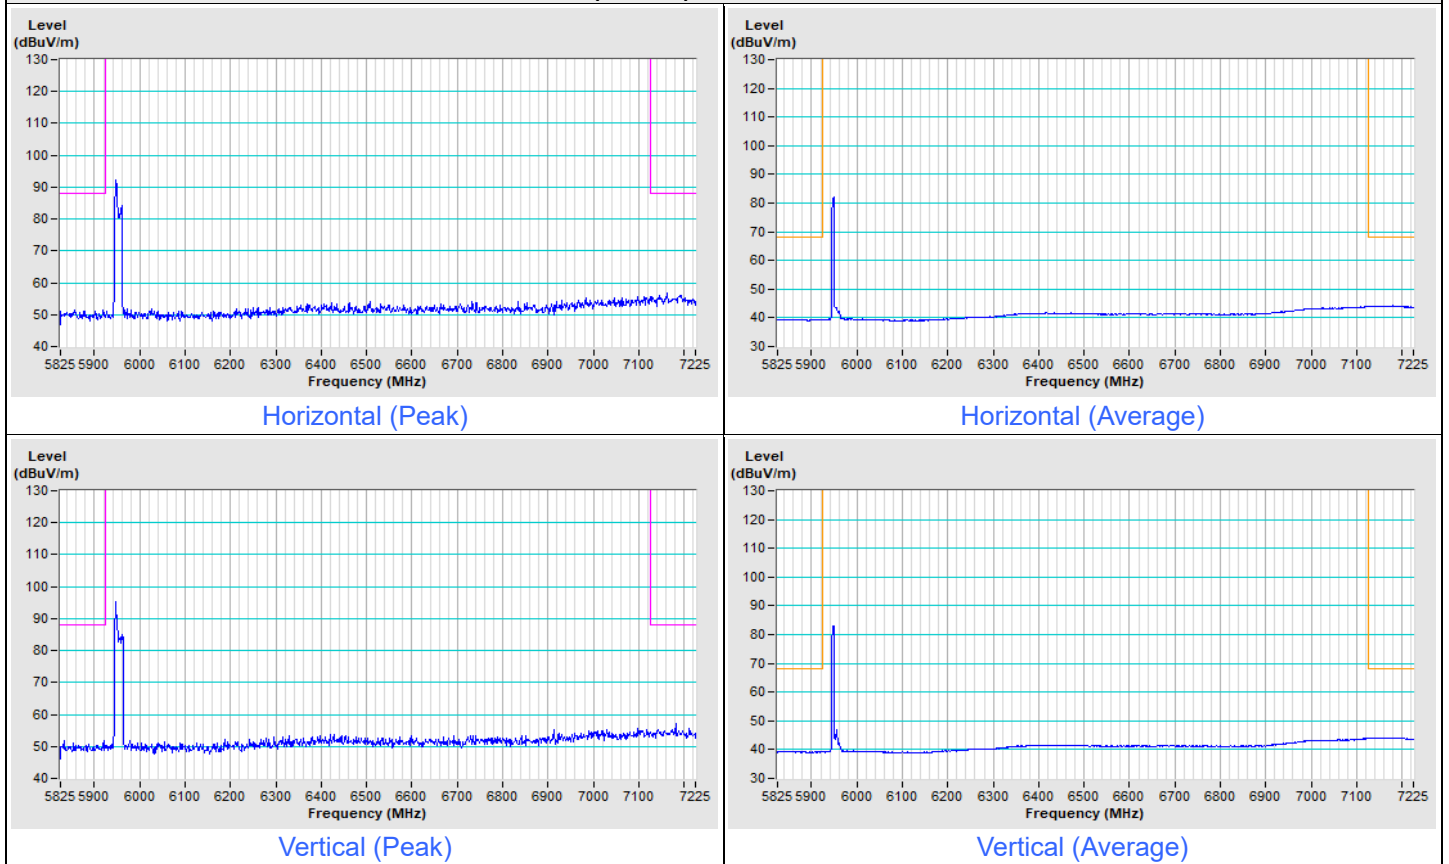


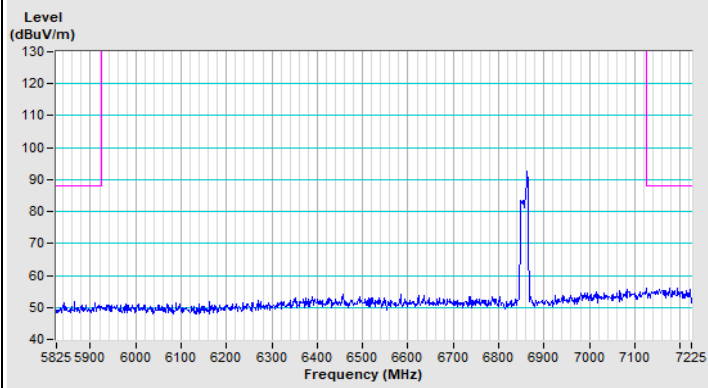802.11be (EHT20) 52-tone RU Channel 181


Horizontal (Peak)

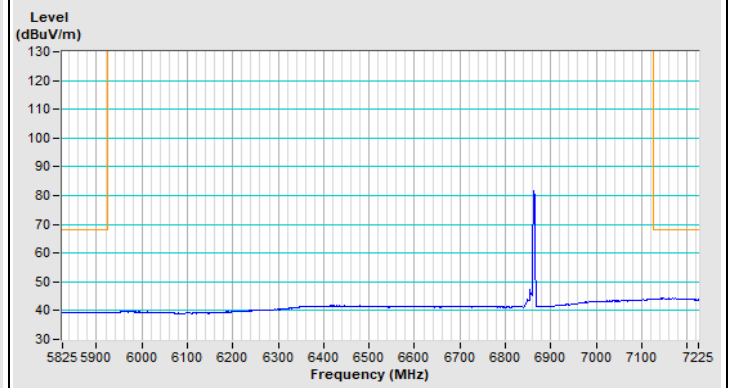

Horizontal (Average)

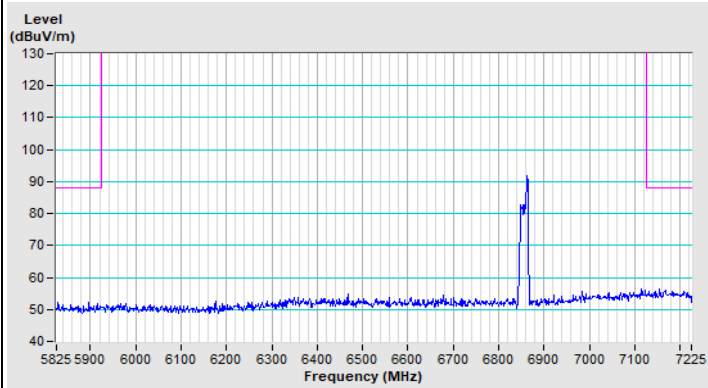


Vertical (Peak)

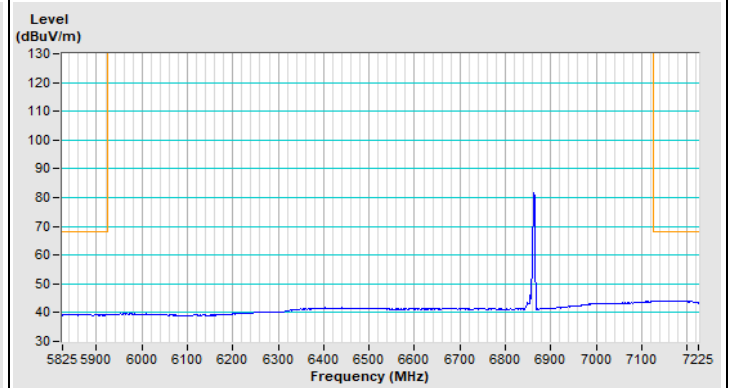


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

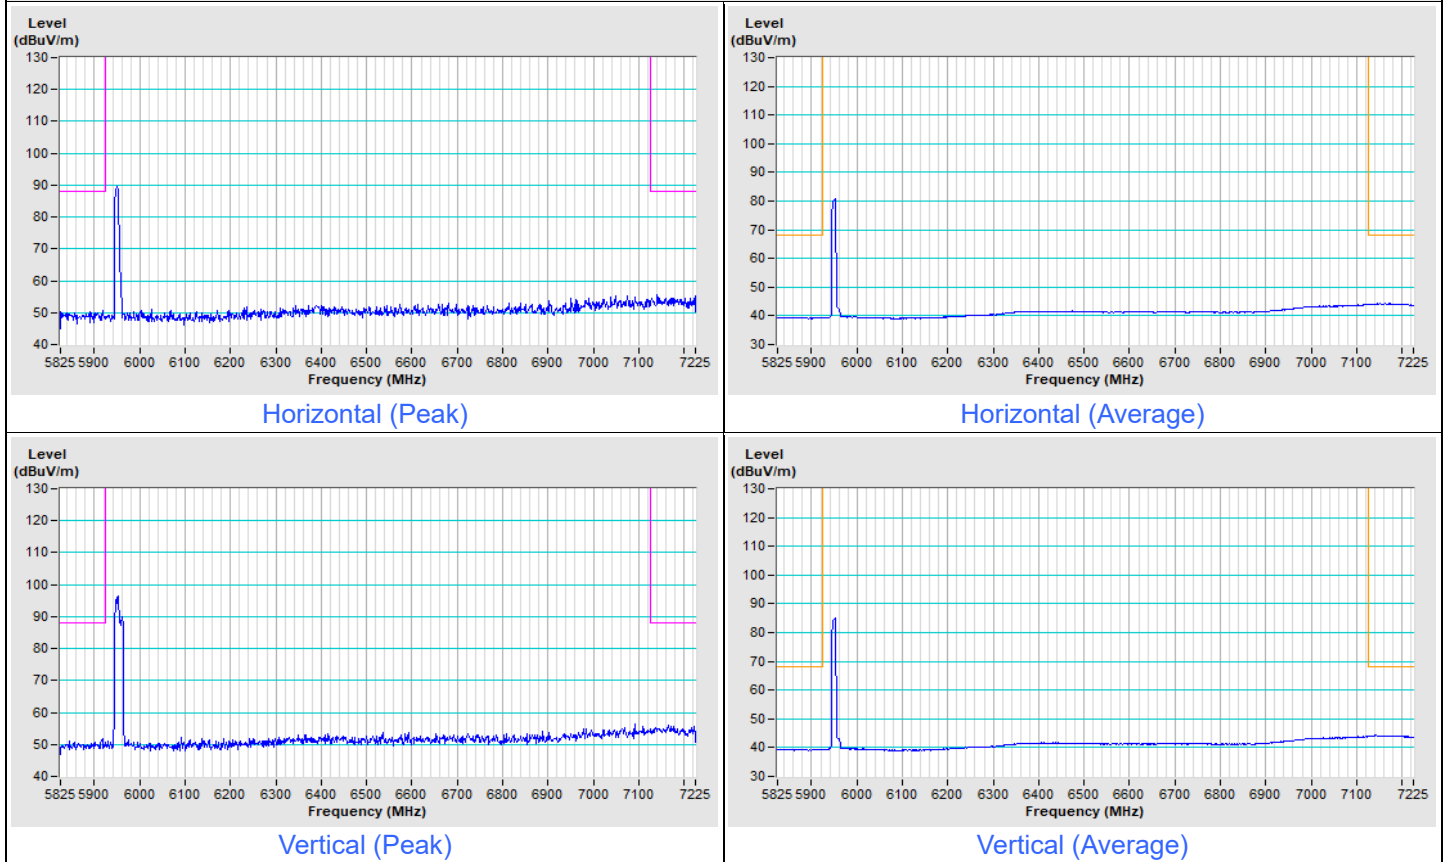


802.11be (EHT20) 106-tone RU Channel 181

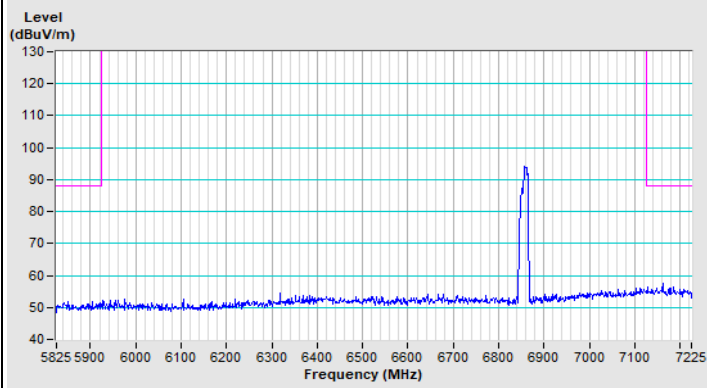


Horizontal (Peak)

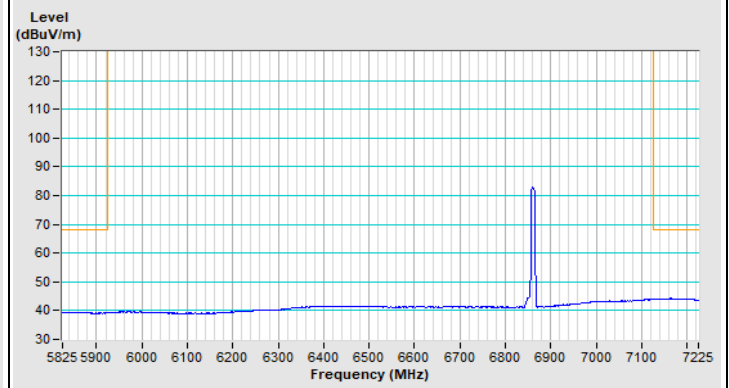

Horizontal (Average)

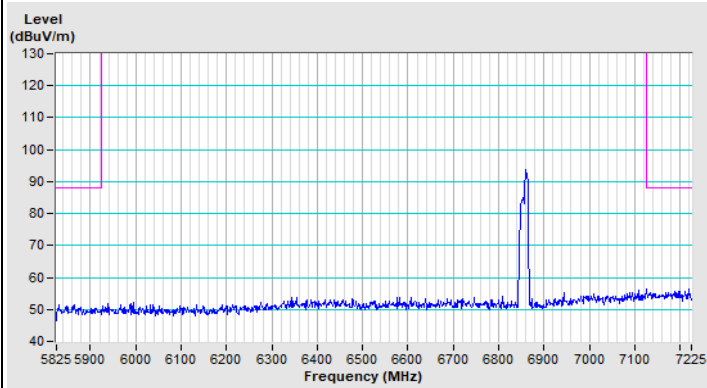


Vertical (Peak)

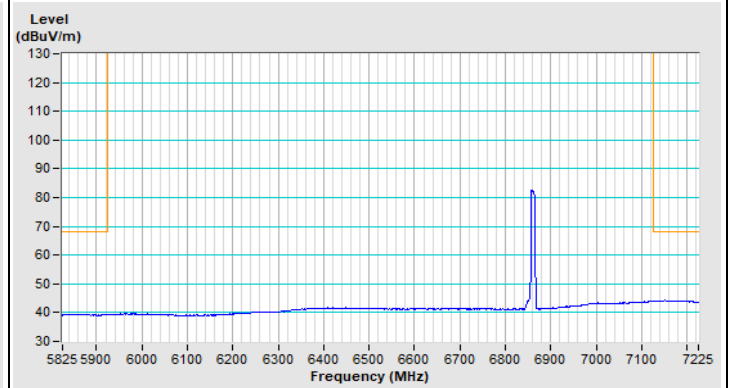


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

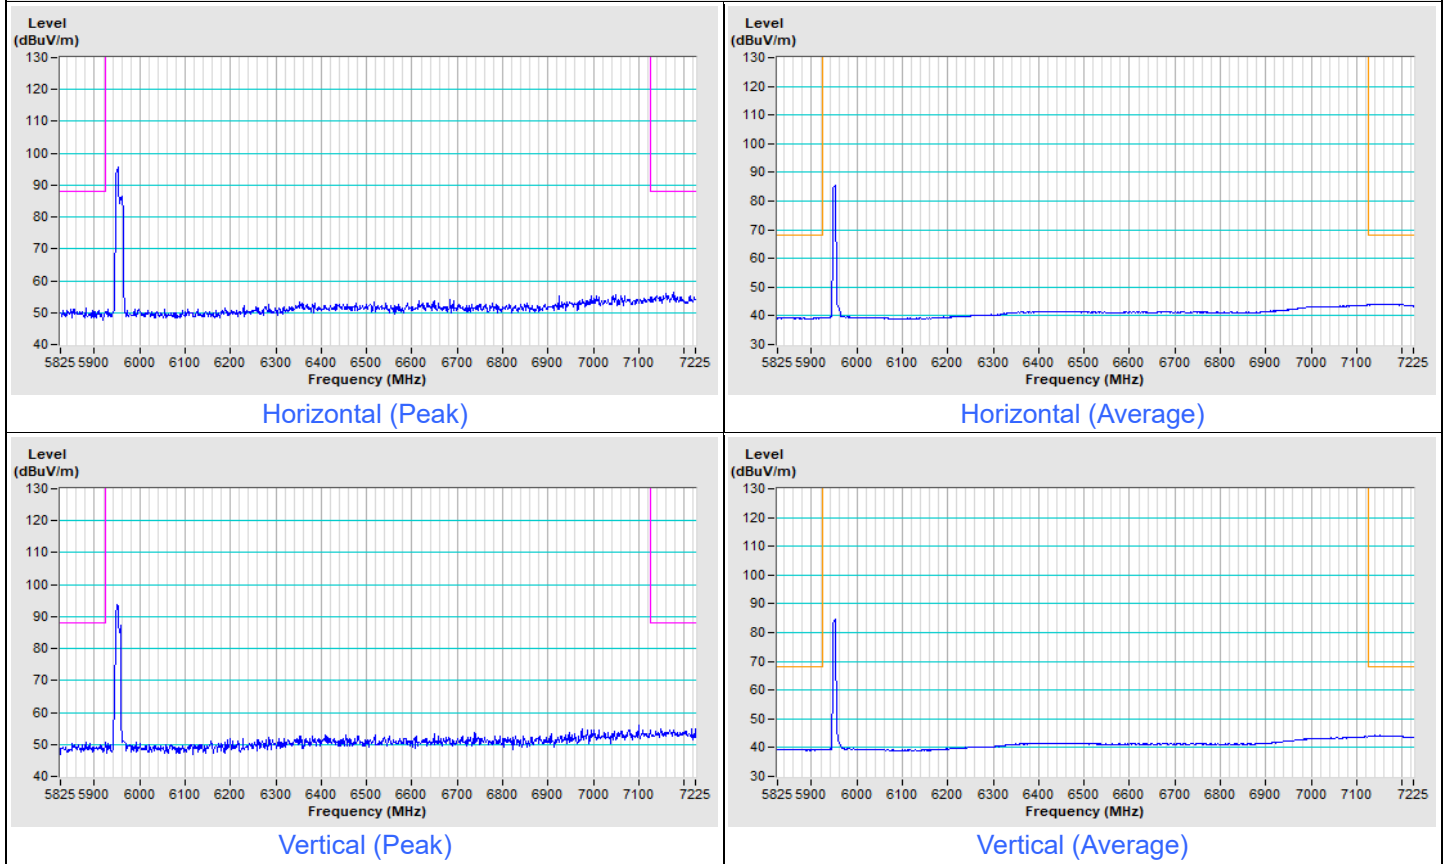


802.11be (EHT20) 52+26-tone MRU Channel 181

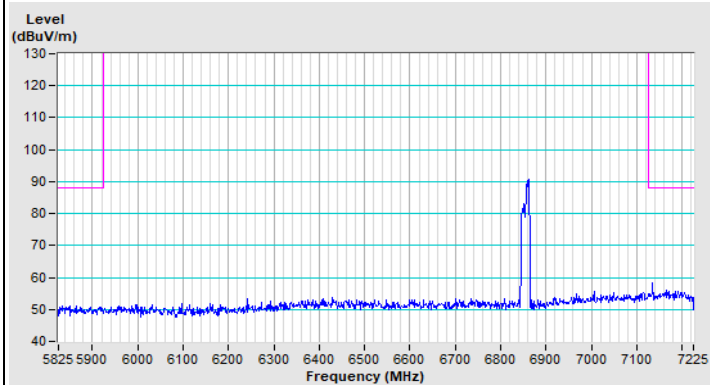


Horizontal (Peak)

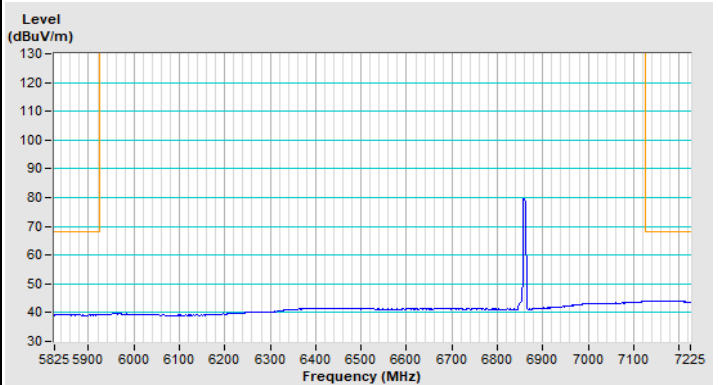

Horizontal (Average)

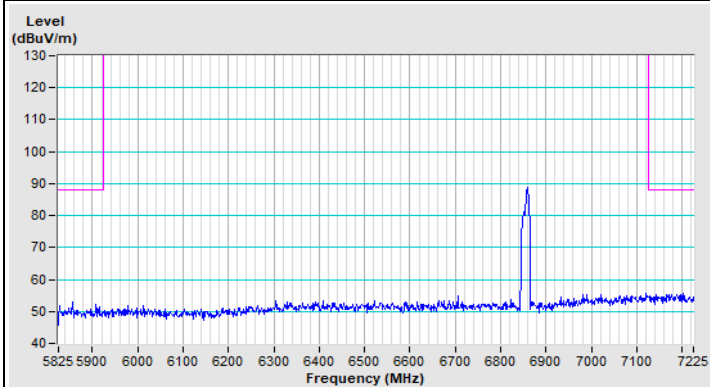


Vertical (Peak)

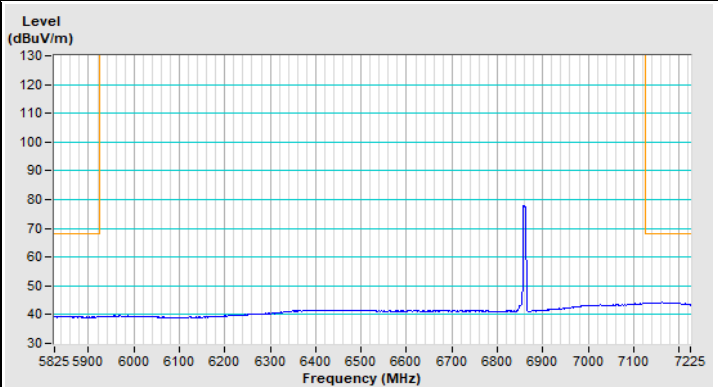


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

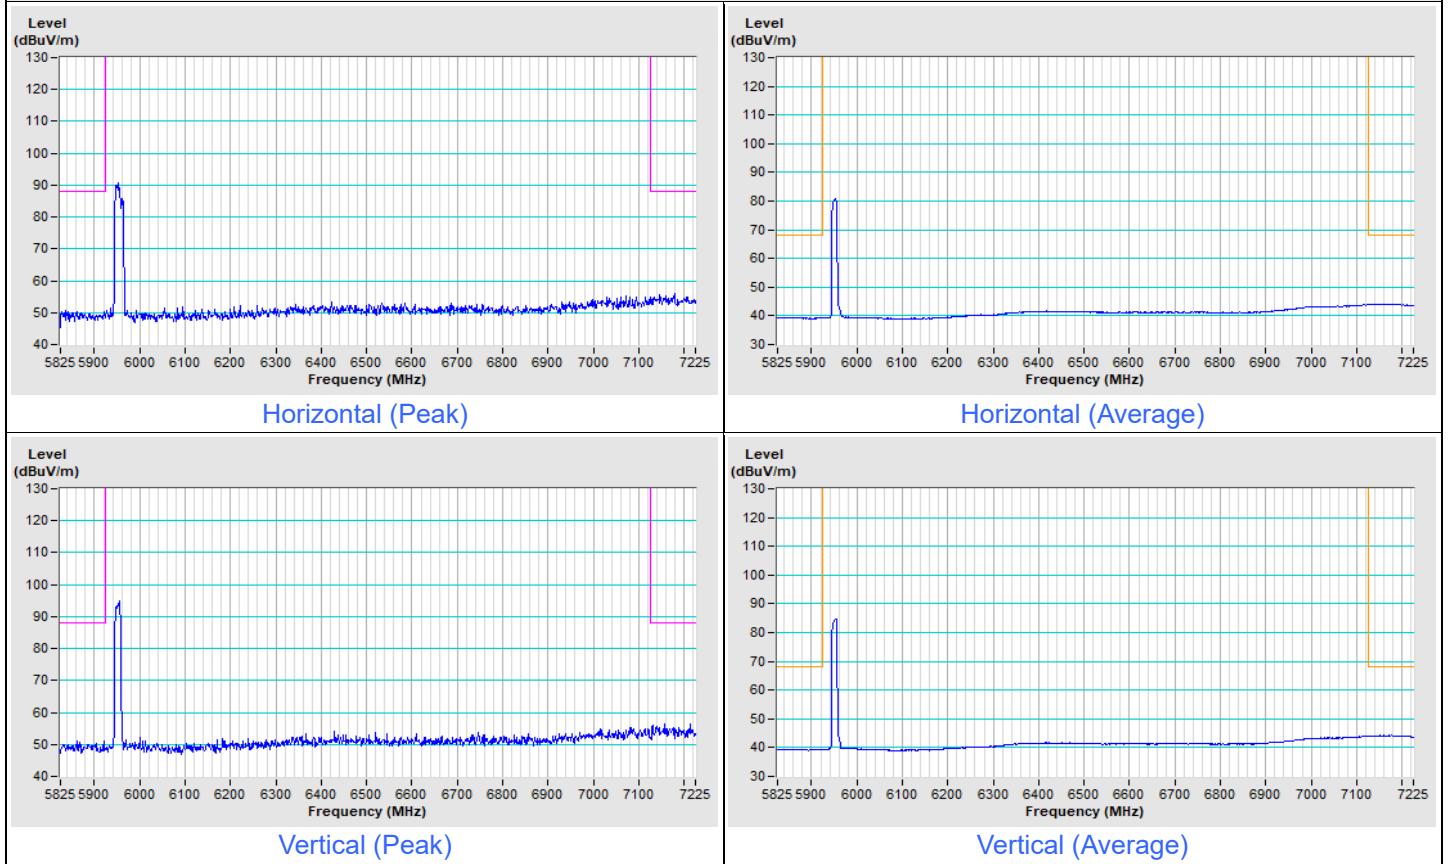


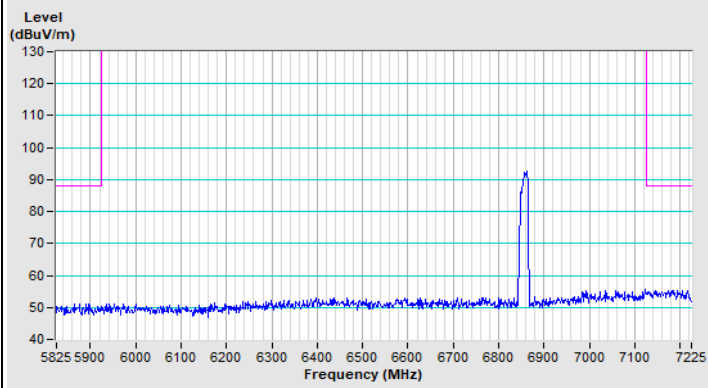802.11be (EHT20) 106+26-tone MRU Channel 181


Horizontal (Peak)

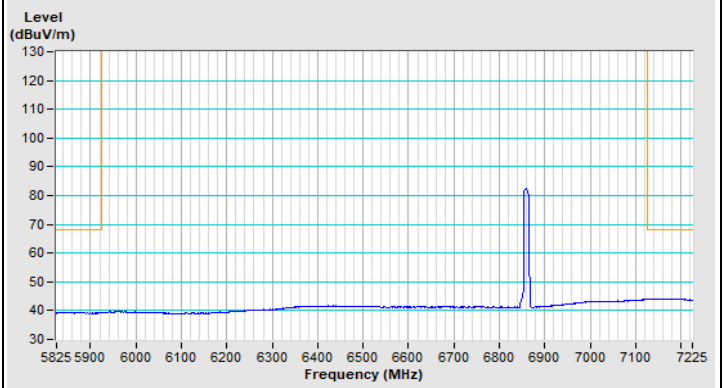

Horizontal (Average)

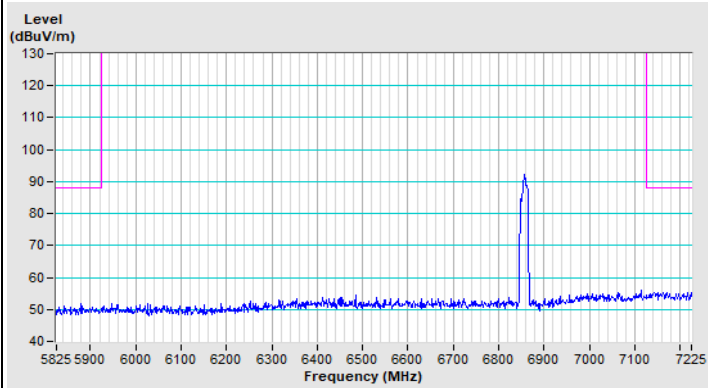


Vertical (Peak)

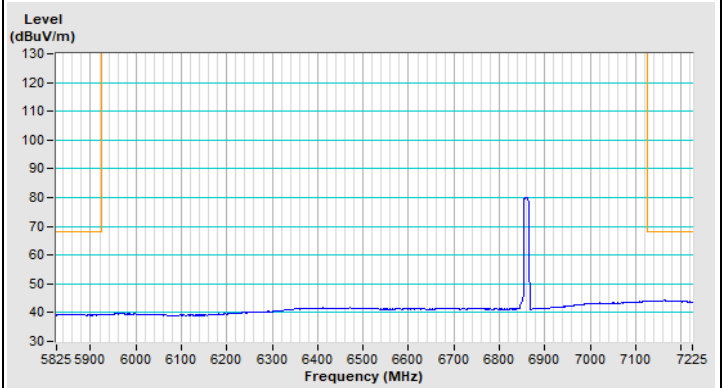


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

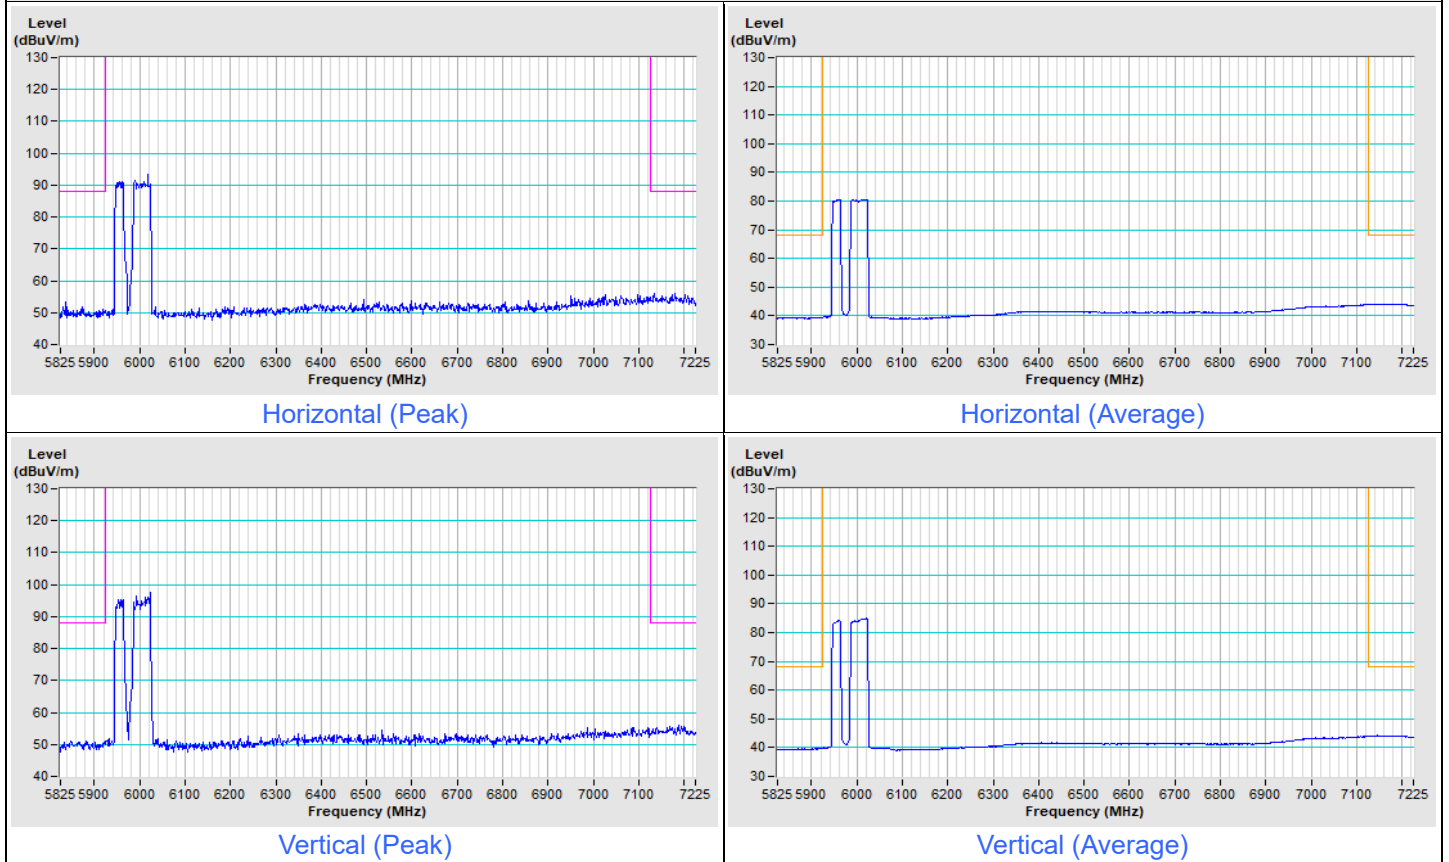


802.11be (EHT80) 484+242-tone MRU Channel 167

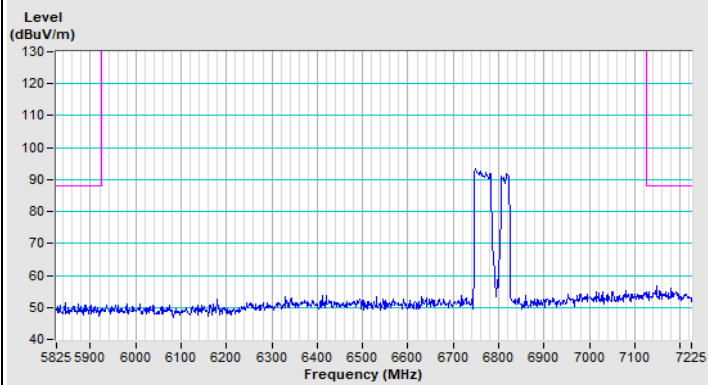


Horizontal (Peak)

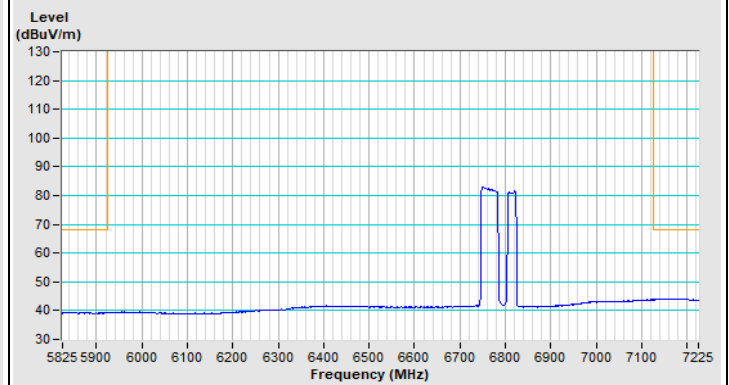

Horizontal (Average)

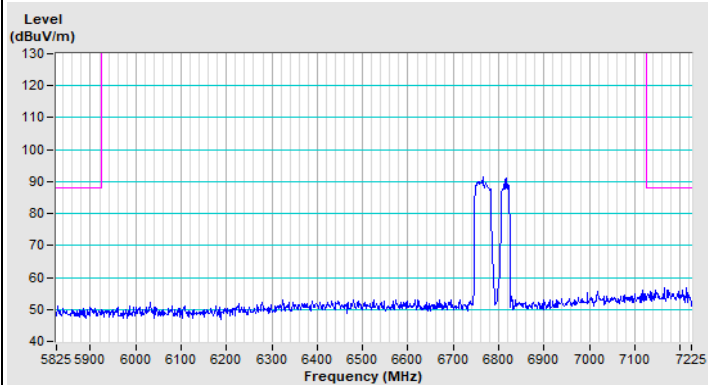


Vertical (Peak)

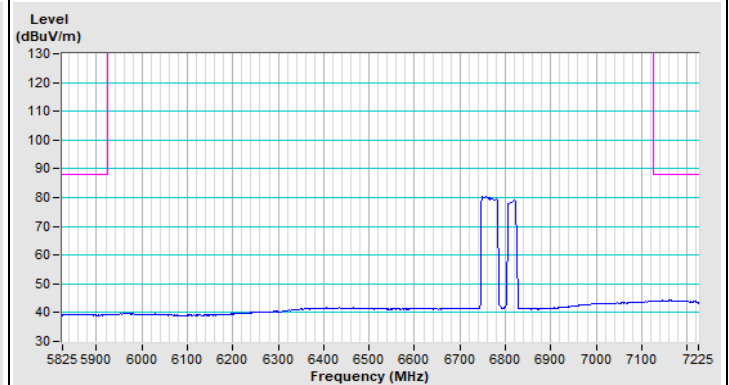


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

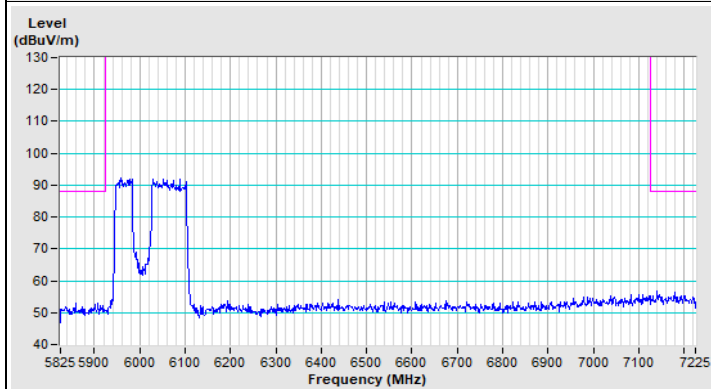


Horizontal (Peak)

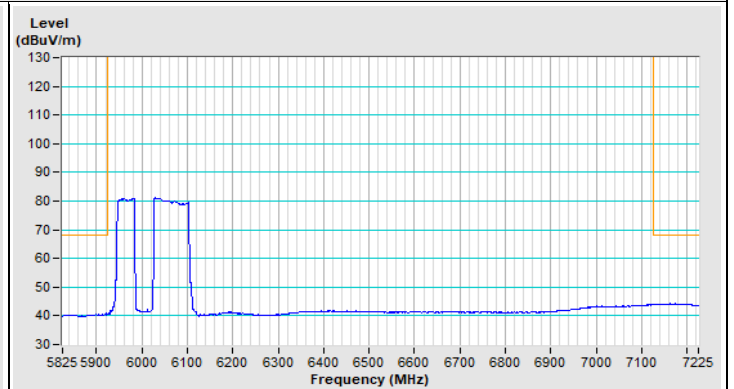

Horizontal (Average)

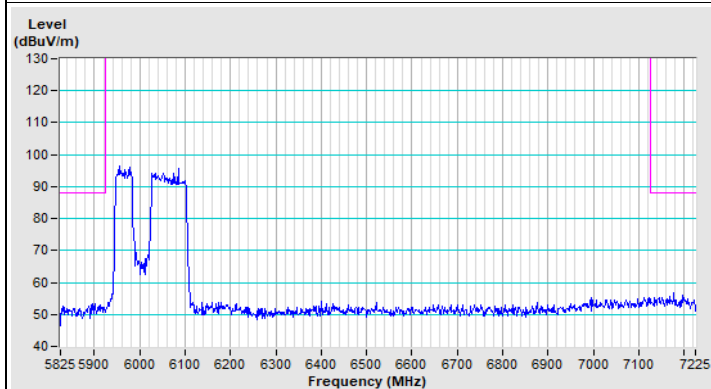


Vertical (Peak)

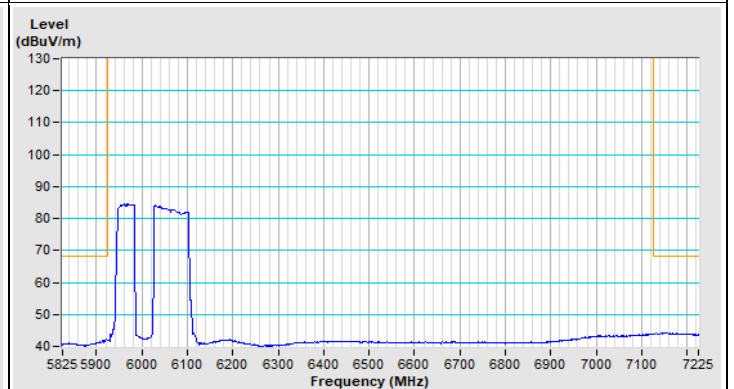


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 143

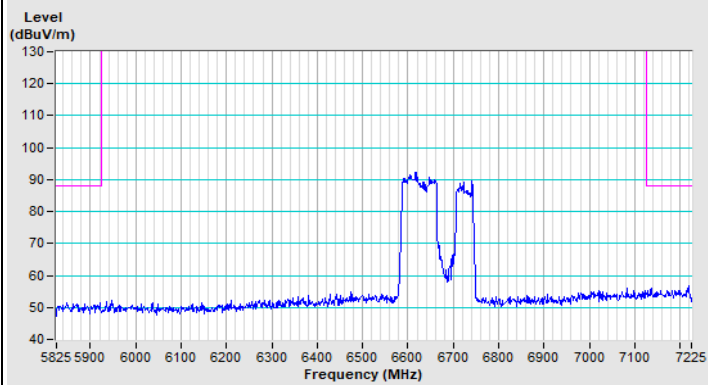


Horizontal (Peak)

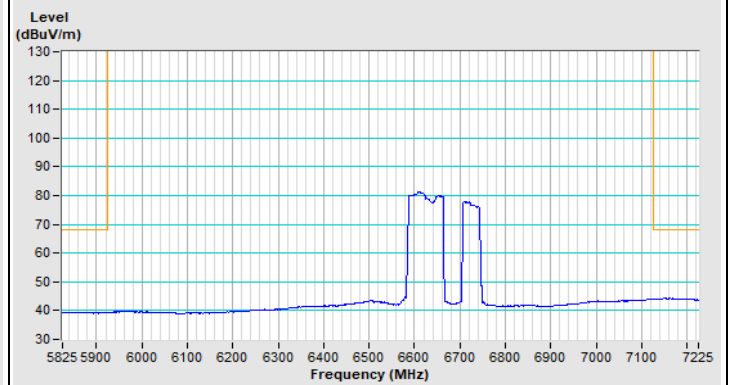

Horizontal (Average)

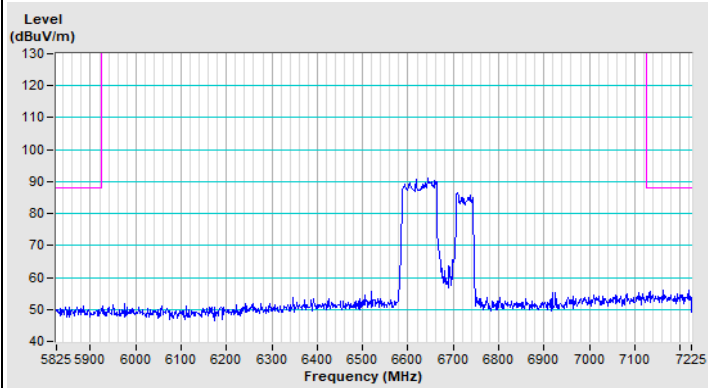


Vertical (Peak)

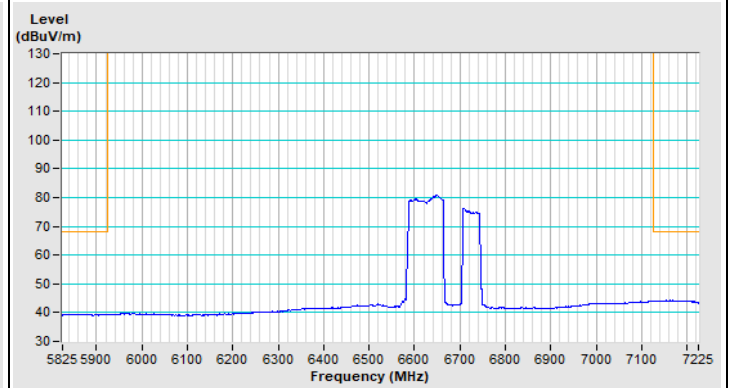


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

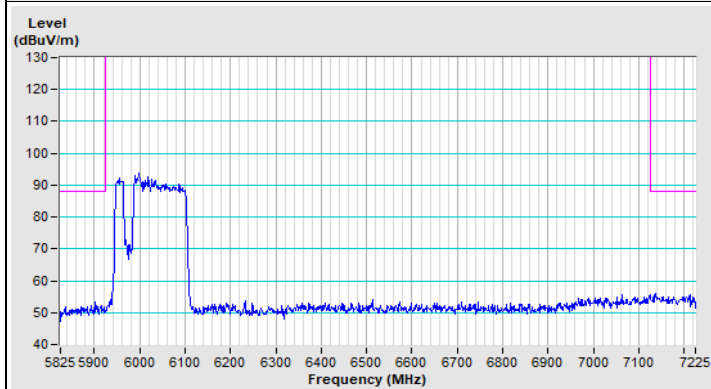


Horizontal (Peak)

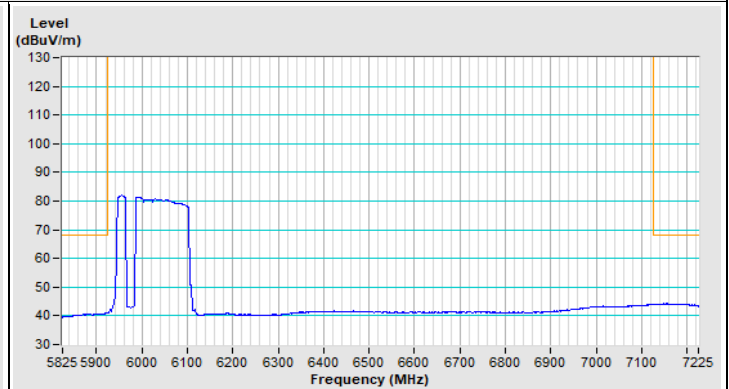


Horizontal (Average)

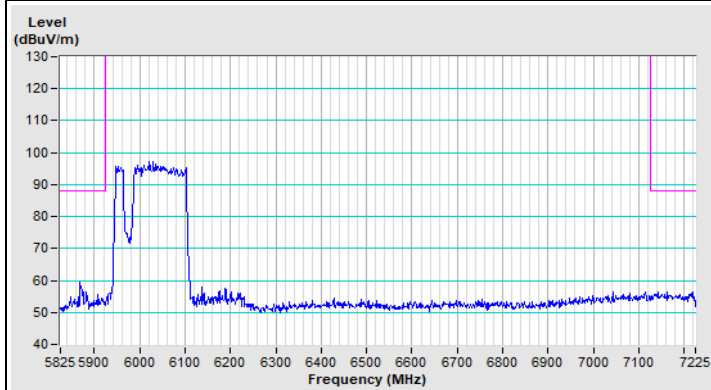


Vertical (Peak)

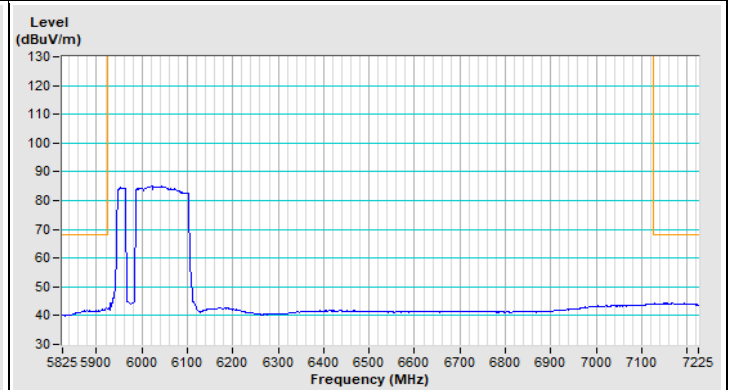


Vertical (Average)

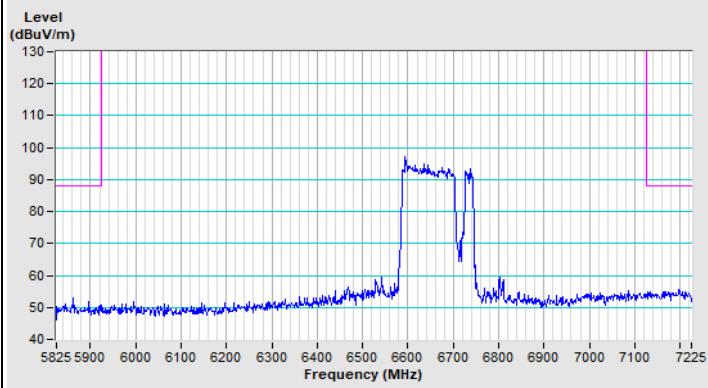802.11be (EHT160) 996+484+242-tone MRU Channel 143


Horizontal (Peak)

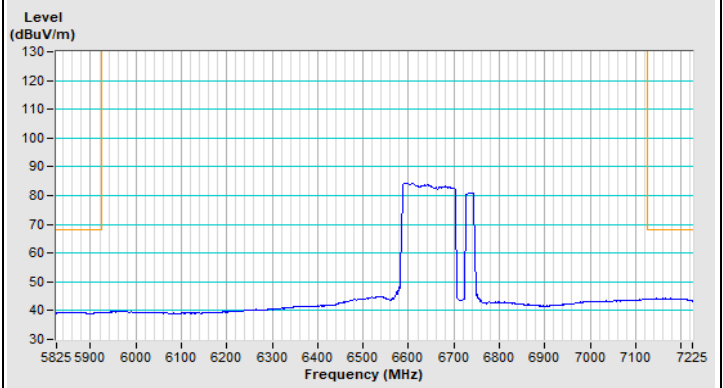

Horizontal (Average)

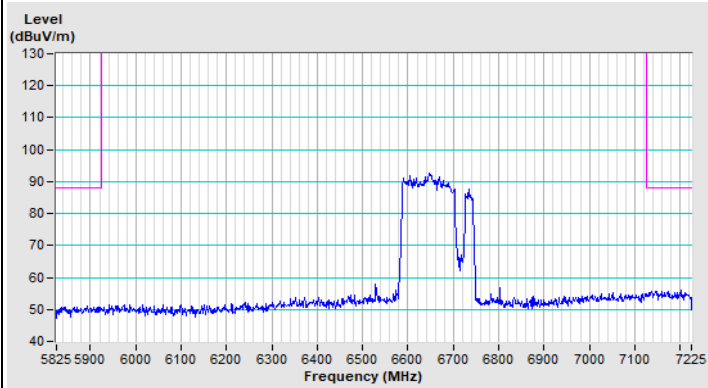

Vertical (Peak)

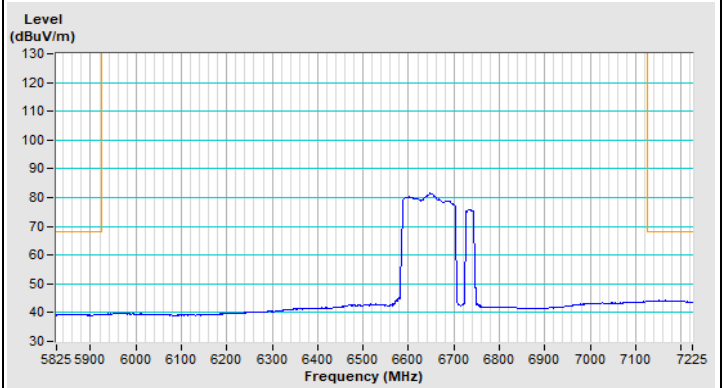

Vertical (Average)


Mode B_2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.5 PK	88.2	-33.7	2.07 H	102	48.9	5.6
2	#5925.00	41.4 AV	68.2	-26.8	2.07 H	102	35.8	5.6
3	*5955.00	106.2 PK			2.07 H	102	100.7	5.5
4	*5955.00	97.2 AV			2.07 H	102	91.7	5.5
5	11910.00	45.5 PK	74.0	-28.5	1.68 H	11	30.9	14.6
6	11910.00	33.6 AV	54.0	-20.4	1.68 H	11	19.0	14.6
7	17865.00	56.3 PK	74.0	-17.7	1.81 H	43	30.4	25.9
8	17865.00	43.8 AV	54.0	-10.2	1.81 H	43	17.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

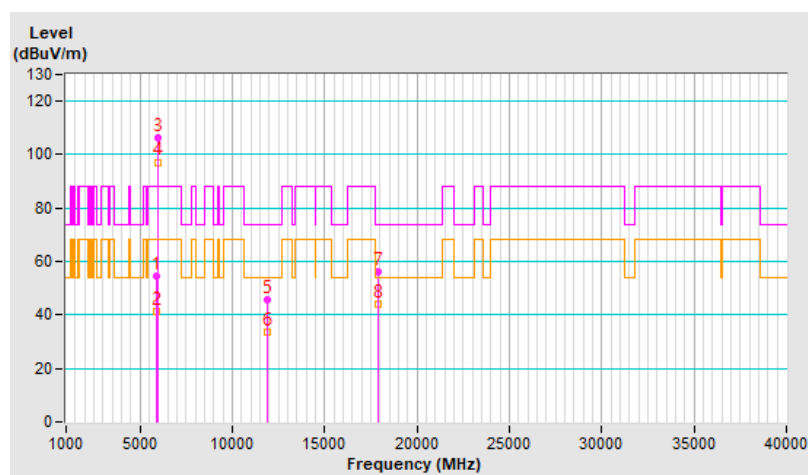


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.5 PK	88.2	-34.7	1.95 V	225	47.9	5.6
2	#5925.00	42.3 AV	68.2	-25.9	1.95 V	225	36.7	5.6
3	*5955.00	108.9 PK			1.95 V	225	103.4	5.5
4	*5955.00	100.0 AV			1.95 V	225	94.5	5.5
5	11910.00	45.5 PK	74.0	-28.5	1.61 V	4	30.9	14.6
6	11910.00	33.8 AV	54.0	-20.2	1.61 V	4	19.2	14.6
7	17865.00	55.9 PK	74.0	-18.1	1.87 V	45	30.0	25.9
8	17865.00	43.6 AV	54.0	-10.4	1.87 V	45	17.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

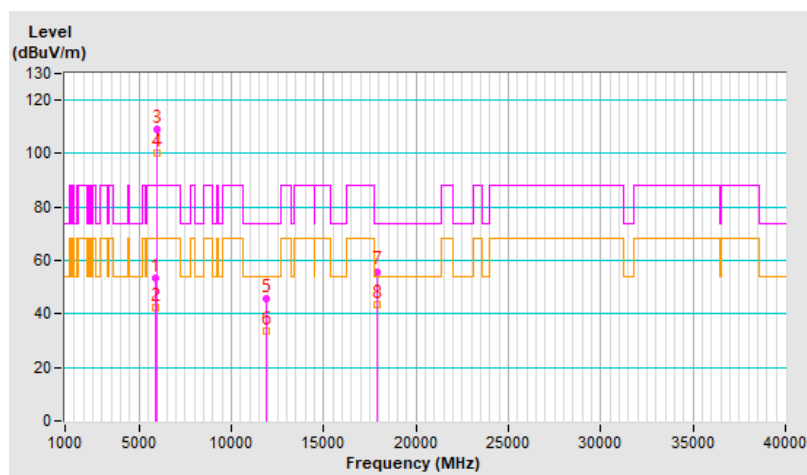


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	103.7 PK			2.12 H	46	97.9	5.8
2	*6195.00	94.9 AV			2.12 H	46	89.1	5.8
3	12390.00	45.0 PK	74.0	-29.0	1.74 H	24	30.3	14.7
4	12390.00	33.3 AV	54.0	-20.7	1.74 H	24	18.6	14.7
5	18585.00	57.0 PK	74.0	-17.0	1.85 H	56	62.5	-5.5
6	18585.00	44.2 AV	54.0	-9.8	1.85 H	56	49.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

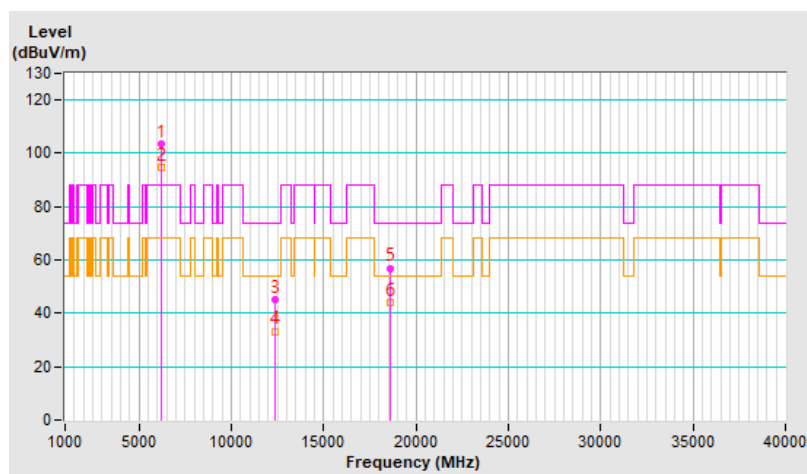


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.7 PK			1.92 V	225	102.9	5.8
2	*6195.00	98.7 AV			1.92 V	225	92.9	5.8
3	12390.00	45.3 PK	74.0	-28.7	1.56 V	2	30.6	14.7
4	12390.00	33.4 AV	54.0	-20.6	1.56 V	2	18.7	14.7
5	18585.00	55.6 PK	74.0	-18.4	1.87 V	46	61.1	-5.5
6	18585.00	43.1 AV	54.0	-10.9	1.87 V	46	48.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

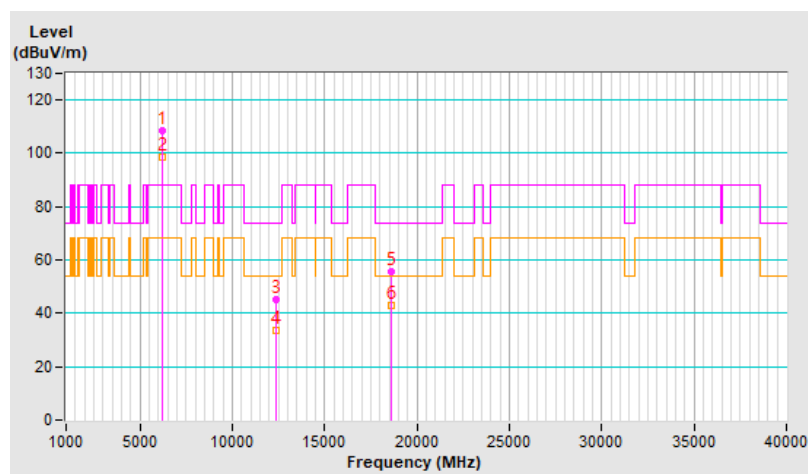


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.7 PK			1.00 H	47	98.9	6.8
2	*6415.00	97.1 AV			1.00 H	47	90.3	6.8
3	#12830.00	45.8 PK	88.2	-42.4	1.69 H	21	30.7	15.1
4	#12830.00	33.8 AV	68.2	-34.4	1.69 H	21	18.7	15.1
5	19245.00	55.5 PK	74.0	-18.5	1.86 H	56	60.1	-4.6
6	19245.00	43.3 AV	54.0	-10.7	1.86 H	56	47.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

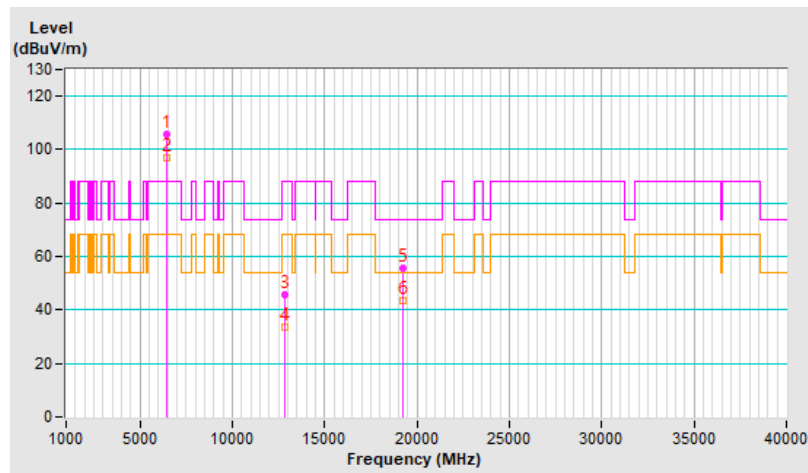


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.9 PK			2.07 V	219	99.1	6.8
2	*6415.00	96.5 AV			2.07 V	219	89.7	6.8
3	#12830.00	45.7 PK	88.2	-42.5	1.62 V	1	30.6	15.1
4	#12830.00	33.8 AV	68.2	-34.4	1.62 V	1	18.7	15.1
5	19245.00	55.9 PK	74.0	-18.1	1.84 V	49	60.5	-4.6
6	19245.00	43.5 AV	54.0	-10.5	1.84 V	49	48.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

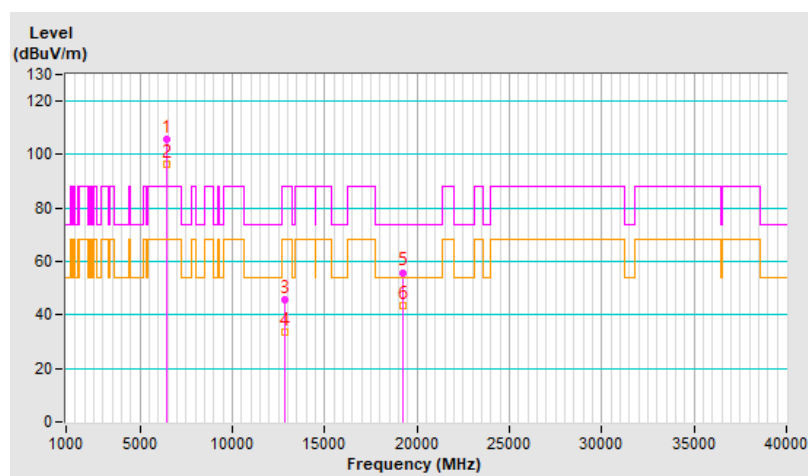


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.4 PK			1.03 H	44	101.0	7.4
2	*6535.00	100.4 AV			1.03 H	44	93.0	7.4
3	#13070.00	45.9 PK	88.2	-42.3	1.73 H	22	30.8	15.1
4	#13070.00	34.1 AV	68.2	-34.1	1.73 H	22	19.0	15.1
5	19605.00	56.5 PK	74.0	-17.5	1.78 H	57	61.3	-4.8
6	19605.00	44.0 AV	54.0	-10.0	1.78 H	57	48.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

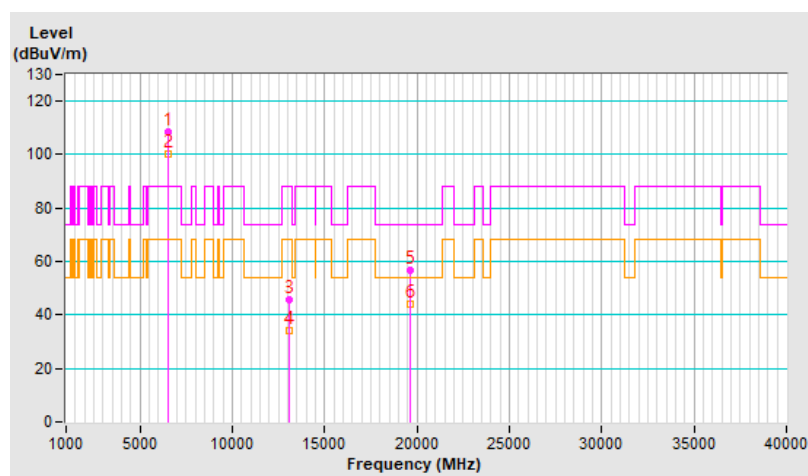


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.4 PK			2.11 V	224	100.0	7.4
2	*6535.00	99.3 AV			2.11 V	224	91.9	7.4
3	#13070.00	44.9 PK	88.2	-43.3	1.57 V	16	29.8	15.1
4	#13070.00	33.4 AV	68.2	-34.8	1.57 V	16	18.3	15.1
5	19605.00	55.3 PK	74.0	-18.7	1.84 V	41	60.1	-4.8
6	19605.00	43.2 AV	54.0	-10.8	1.84 V	41	48.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

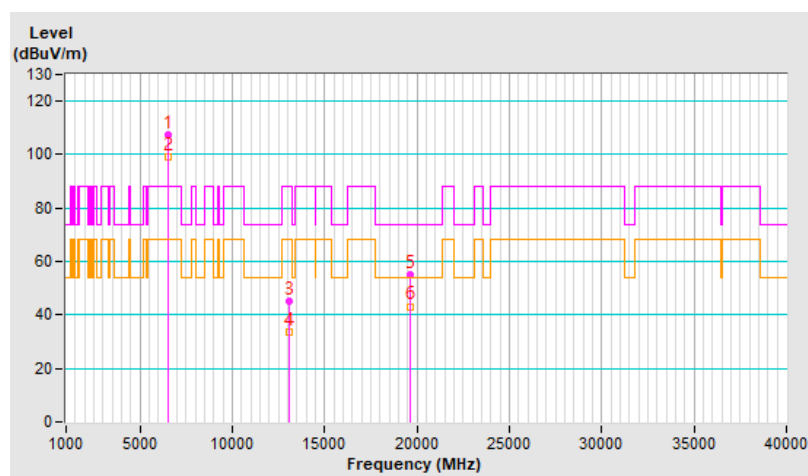


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.6 PK			1.00 H	61	99.9	7.7
2	*6695.00	98.8 AV			1.00 H	61	91.1	7.7
3	13390.00	45.9 PK	74.0	-28.1	1.62 H	19	30.5	15.4
4	13390.00	33.7 AV	54.0	-20.3	1.62 H	19	18.3	15.4
5	20085.00	56.1 PK	74.0	-17.9	1.83 H	28	60.4	-4.3
6	20085.00	43.3 AV	54.0	-10.7	1.83 H	28	47.6	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

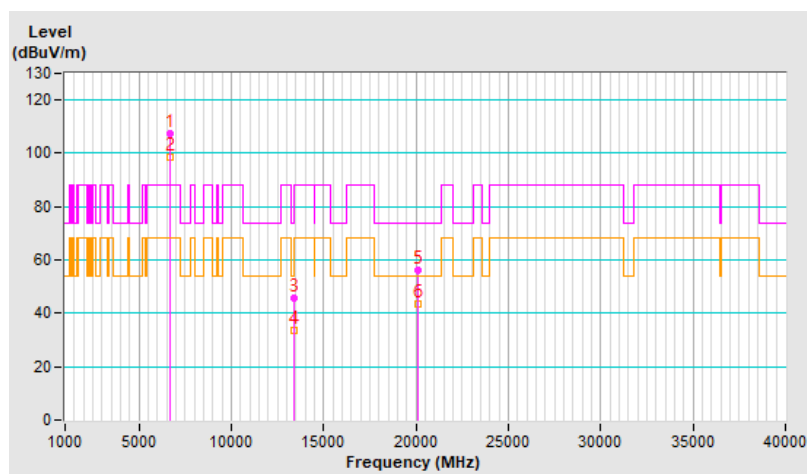


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.8 PK			1.84 V	122	99.1	7.7
2	*6695.00	98.7 AV			1.84 V	122	91.0	7.7
3	13390.00	45.2 PK	74.0	-28.8	1.67 V	13	29.8	15.4
4	13390.00	33.6 AV	54.0	-20.4	1.67 V	13	18.2	15.4
5	20085.00	56.2 PK	74.0	-17.8	1.85 V	32	60.5	-4.3
6	20085.00	43.9 AV	54.0	-10.1	1.85 V	32	48.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

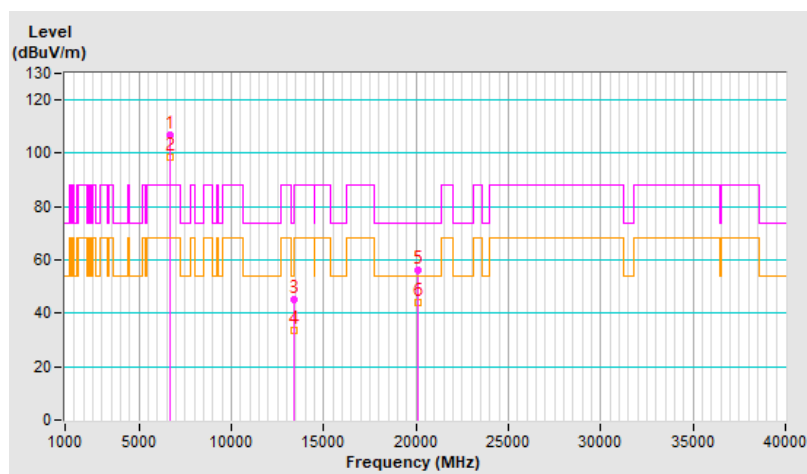


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.7 PK			1.00 H	55	109.5	8.2
2	*6855.00	98.6 AV			1.00 H	55	90.4	8.2
3	#13710.00	45.7 PK	88.2	-42.5	1.64 H	5	29.4	16.3
4	#13710.00	33.7 AV	68.2	-34.5	1.64 H	5	17.4	16.3
5	20565.00	56.9 PK	74.0	-17.1	1.86 H	27	60.6	-3.7
6	20565.00	44.2 AV	54.0	-9.8	1.86 H	27	47.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

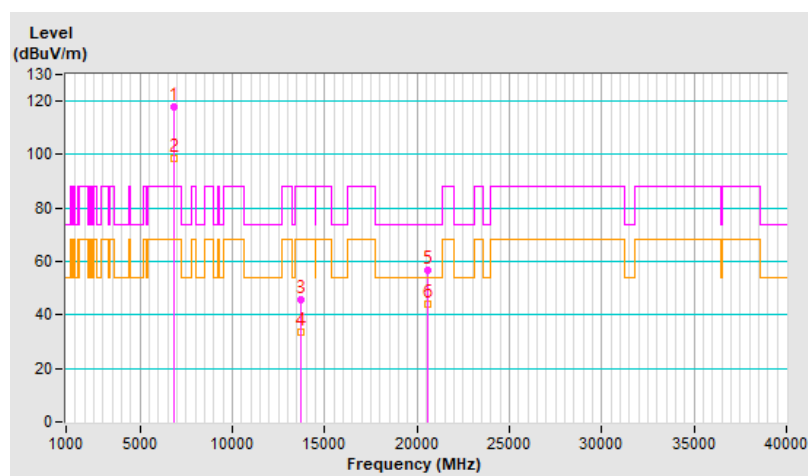


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.3 PK			1.94 V	106	100.1	8.2
2	*6855.00	99.1 AV			1.94 V	106	90.9	8.2
3	#13710.00	45.3 PK	88.2	-42.9	1.63 V	10	29.0	16.3
4	#13710.00	33.5 AV	68.2	-34.7	1.63 V	10	17.2	16.3
5	20565.00	56.4 PK	74.0	-17.6	1.81 V	41	60.1	-3.7
6	20565.00	43.8 AV	54.0	-10.2	1.81 V	41	47.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

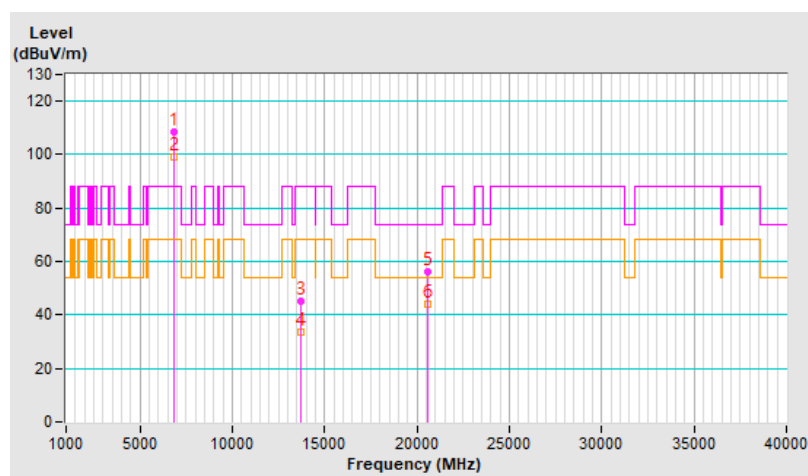

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.11 H	163	46.3	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.11 H	163	33.9	5.6
3	*5955.00	92.6 PK			1.11 H	163	87.1	5.5
4	*5955.00	81.5 AV			1.11 H	163	76.0	5.5
5	11910.00	46.1 PK	74.0	-27.9	1.70 H	3	31.5	14.6
6	11910.00	34.1 AV	54.0	-19.9	1.70 H	3	19.5	14.6
7	17865.00	55.7 PK	74.0	-18.3	1.76 H	39	29.8	25.9
8	17865.00	43.5 AV	54.0	-10.5	1.76 H	39	17.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

