


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.00 V	49	46.5	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.00 V	49	33.9	5.6
3	*5955.00	95.9 PK			1.00 V	49	90.4	5.5
4	*5955.00	85.6 AV			1.00 V	49	80.1	5.5
5	11910.00	45.6 PK	74.0	-28.4	1.62 V	12	31.0	14.6
6	11910.00	33.9 AV	54.0	-20.1	1.62 V	12	19.3	14.6
7	17865.00	56.1 PK	74.0	-17.9	1.80 V	50	30.2	25.9
8	17865.00	43.8 AV	54.0	-10.2	1.80 V	50	17.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

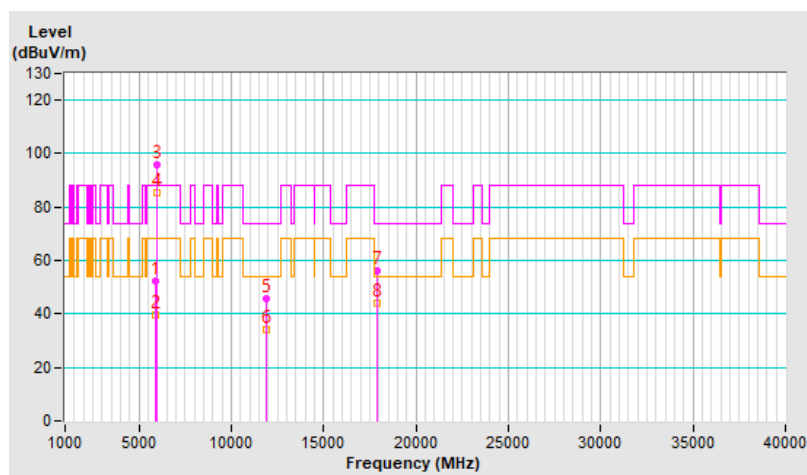


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	92.9 PK			1.10 H	153	87.1	5.8
2	*6195.00	81.9 AV			1.10 H	153	76.1	5.8
3	12390.00	46.3 PK	74.0	-27.7	1.65 H	4	31.6	14.7
4	12390.00	34.4 AV	54.0	-19.6	1.65 H	4	19.7	14.7
5	18585.00	56.0 PK	74.0	-18.0	1.73 H	58	61.5	-5.5
6	18585.00	43.6 AV	54.0	-10.4	1.73 H	58	49.1	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

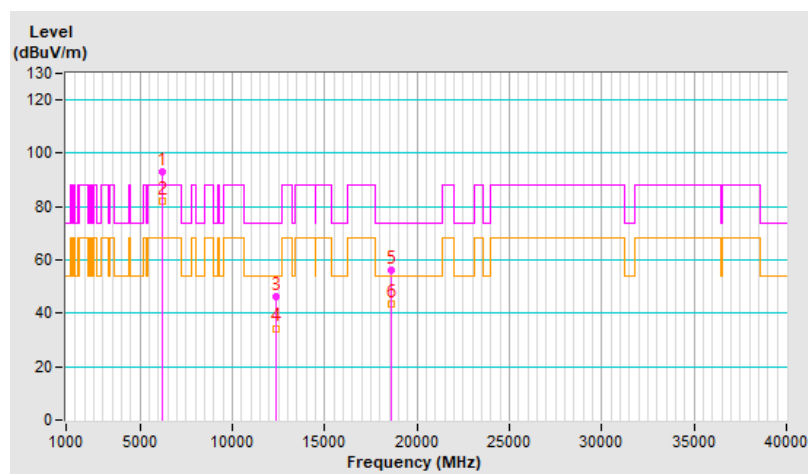


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.6 PK			1.00 V	35	89.8	5.8
2	*6195.00	85.4 AV			1.00 V	35	79.6	5.8
3	12390.00	46.1 PK	74.0	-27.9	1.58 V	12	31.4	14.7
4	12390.00	34.3 AV	54.0	-19.7	1.58 V	12	19.6	14.7
5	18585.00	56.4 PK	74.0	-17.6	1.72 V	60	61.9	-5.5
6	18585.00	44.4 AV	54.0	-9.6	1.72 V	60	49.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

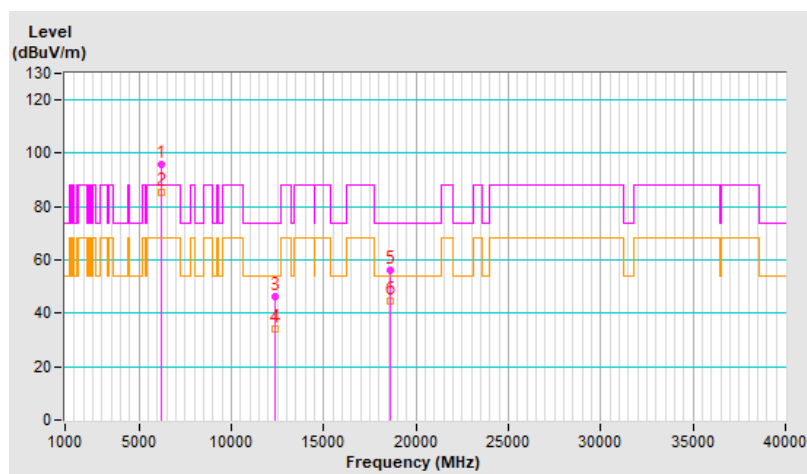


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.7 PK			1.08 H	173	85.9	6.8
2	*6415.00	81.7 AV			1.08 H	173	74.9	6.8
3	#12830.00	46.0 PK	88.2	-42.2	1.70 H	2	30.9	15.1
4	#12830.00	34.1 AV	68.2	-34.1	1.70 H	2	19.0	15.1
5	19245.00	56.5 PK	74.0	-17.5	1.77 H	49	61.1	-4.6
6	19245.00	44.3 AV	54.0	-9.7	1.77 H	49	48.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

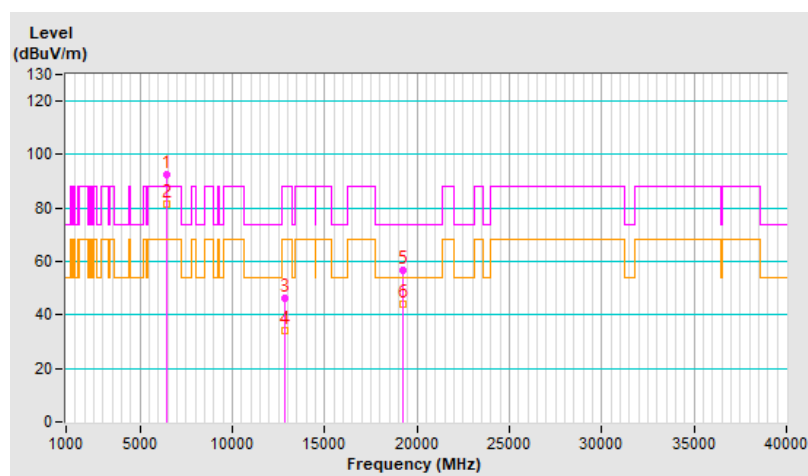


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.9 PK			1.02 V	40	89.1	6.8
2	*6415.00	85.9 AV			1.02 V	40	79.1	6.8
3	#12830.00	45.6 PK	88.2	-42.6	1.61 V	14	30.5	15.1
4	#12830.00	33.8 AV	68.2	-34.4	1.61 V	14	18.7	15.1
5	19245.00	56.1 PK	74.0	-17.9	1.74 V	65	60.7	-4.6
6	19245.00	44.3 AV	54.0	-9.7	1.74 V	65	48.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

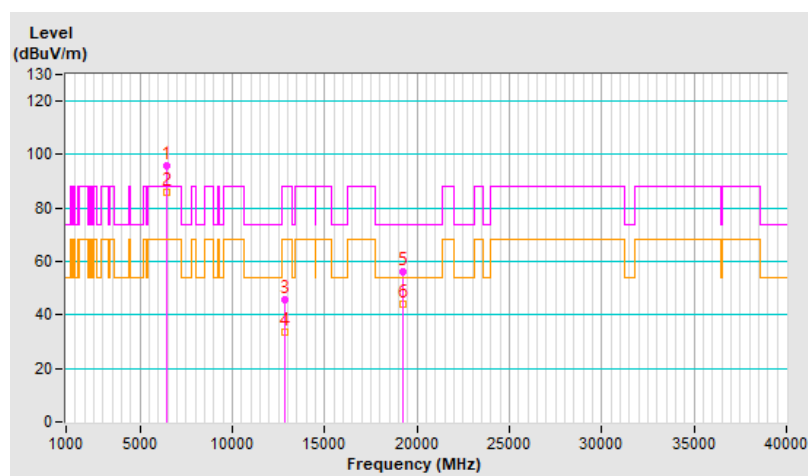


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.7 PK			1.08 H	158	85.3	7.4
2	*6535.00	81.7 AV			1.08 H	158	74.3	7.4
3	#13070.00	46.0 PK	88.2	-42.2	1.66 H	17	30.9	15.1
4	#13070.00	34.3 AV	68.2	-33.9	1.66 H	17	19.2	15.1
5	19605.00	56.4 PK	74.0	-17.6	1.76 H	30	61.2	-4.8
6	19605.00	44.1 AV	54.0	-9.9	1.76 H	30	48.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

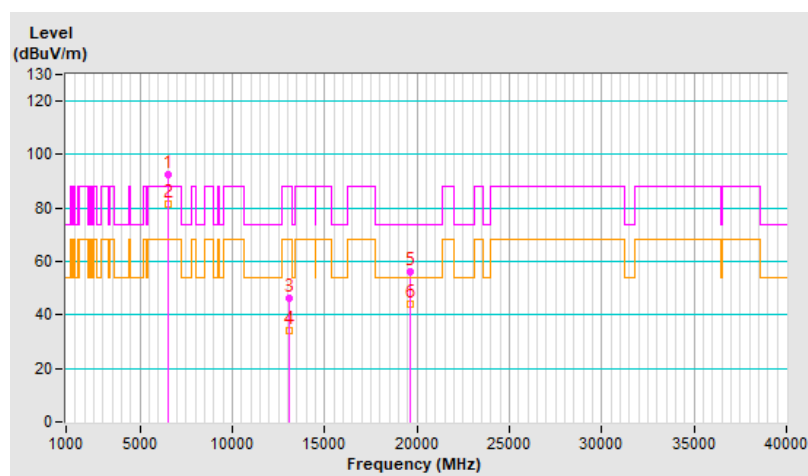


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.2 PK			1.00 V	42	88.8	7.4
2	*6535.00	85.8 AV			1.00 V	42	78.4	7.4
3	#13070.00	46.0 PK	88.2	-42.2	1.66 V	22	30.9	15.1
4	#13070.00	34.4 AV	68.2	-33.8	1.66 V	22	19.3	15.1
5	19605.00	56.0 PK	74.0	-18.0	1.79 V	55	60.8	-4.8
6	19605.00	43.8 AV	54.0	-10.2	1.79 V	55	48.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

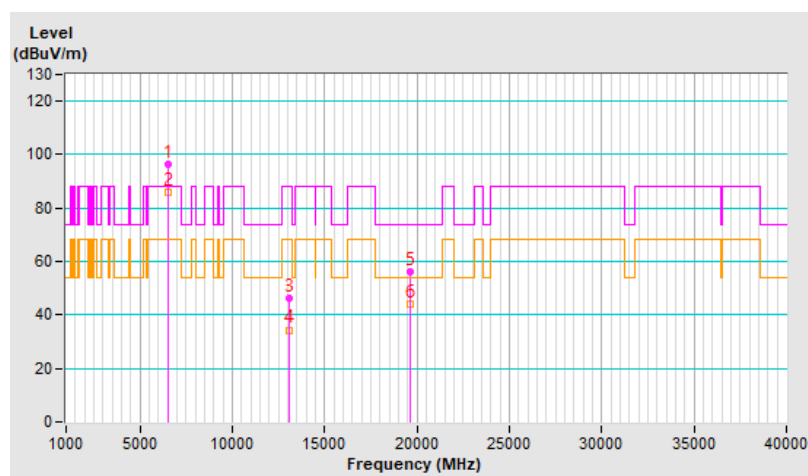


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.3 PK			1.06 H	164	84.6	7.7
2	*6695.00	81.2 AV			1.06 H	164	73.5	7.7
3	13390.00	45.9 PK	74.0	-28.1	1.72 H	18	30.5	15.4
4	13390.00	33.9 AV	54.0	-20.1	1.72 H	18	18.5	15.4
5	20085.00	56.2 PK	74.0	-17.8	1.75 H	46	60.5	-4.3
6	20085.00	44.0 AV	54.0	-10.0	1.75 H	46	48.3	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

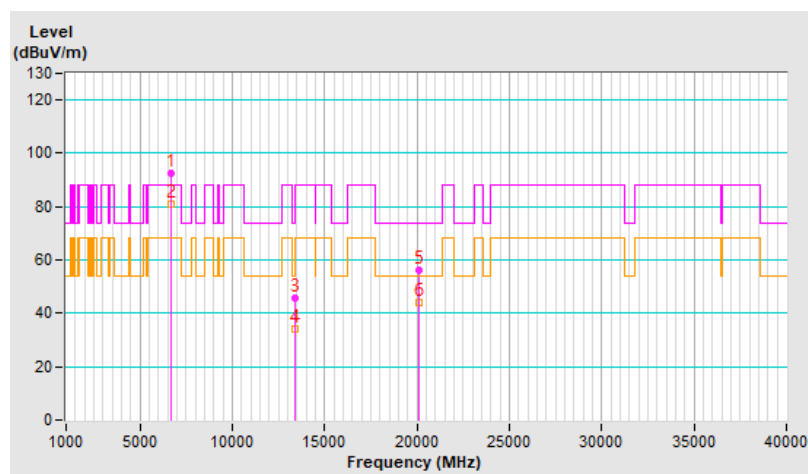


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.2 PK			1.00 V	48	87.5	7.7
2	*6695.00	85.2 AV			1.00 V	48	77.5	7.7
3	13390.00	46.0 PK	74.0	-28.0	1.60 V	22	30.6	15.4
4	13390.00	34.4 AV	54.0	-19.6	1.60 V	22	19.0	15.4
5	20085.00	55.7 PK	74.0	-18.3	1.81 V	39	60.0	-4.3
6	20085.00	43.8 AV	54.0	-10.2	1.81 V	39	48.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

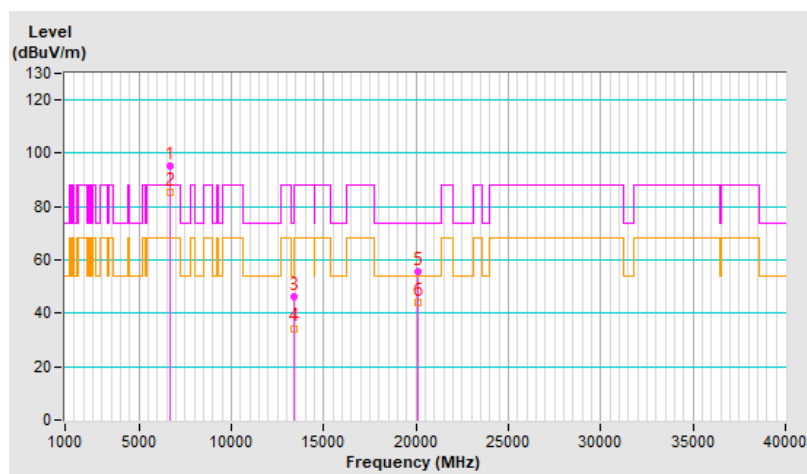


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.3 PK			2.34 H	195	86.1	8.2
2	*6855.00	83.0 AV			2.34 H	195	74.8	8.2
3	#13710.00	45.8 PK	88.2	-42.4	1.66 H	9	29.5	16.3
4	#13710.00	34.0 AV	68.2	-34.2	1.66 H	9	17.7	16.3
5	20565.00	56.5 PK	74.0	-17.5	1.75 H	52	60.2	-3.7
6	20565.00	43.9 AV	54.0	-10.1	1.75 H	52	47.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

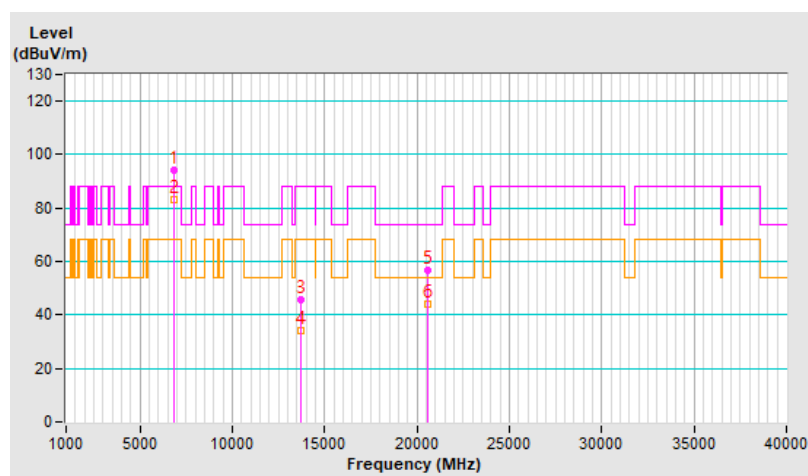


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.7 PK			1.24 V	334	83.5	8.2
2	*6855.00	79.7 AV			1.24 V	334	71.5	8.2
3	#13710.00	45.9 PK	88.2	-42.3	1.63 V	12	29.6	16.3
4	#13710.00	34.1 AV	68.2	-34.1	1.63 V	12	17.8	16.3
5	20565.00	56.2 PK	74.0	-17.8	1.79 V	40	59.9	-3.7
6	20565.00	44.3 AV	54.0	-9.7	1.79 V	40	48.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

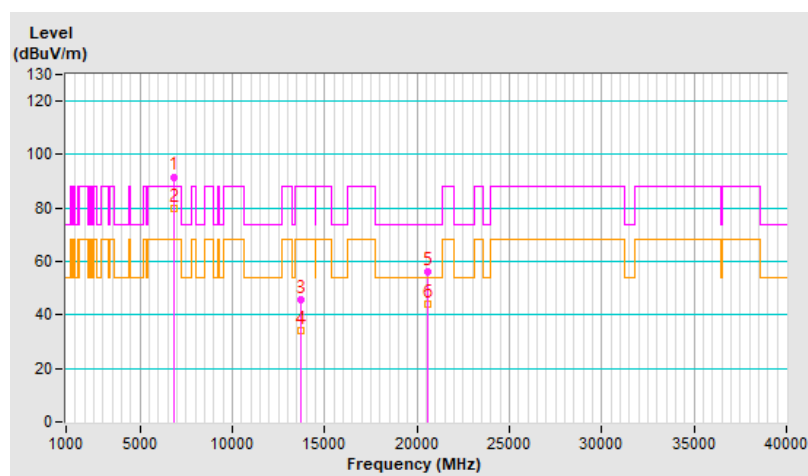


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.04 H	166	45.7	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.04 H	166	33.8	5.6
3	*5965.00	92.3 PK			1.04 H	166	86.8	5.5
4	*5965.00	81.9 AV			1.04 H	166	76.4	5.5
5	11930.00	45.9 PK	74.0	-28.1	1.64 H	16	31.4	14.5
6	11930.00	34.0 AV	54.0	-20.0	1.64 H	16	19.5	14.5
7	17895.00	56.2 PK	74.0	-17.8	1.78 H	54	29.8	26.4
8	17895.00	43.8 AV	54.0	-10.2	1.78 H	54	17.4	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

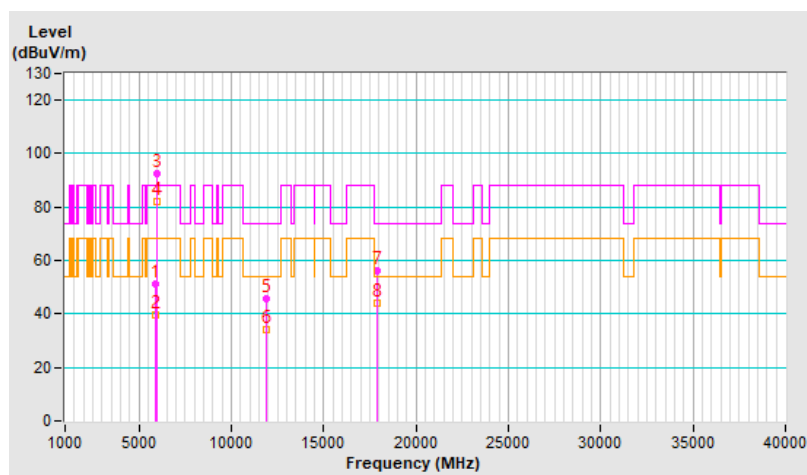


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.17 V	53	45.8	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.17 V	53	34.2	5.6
3	*5965.00	97.4 PK			1.17 V	53	91.9	5.5
4	*5965.00	85.3 AV			1.17 V	53	79.8	5.5
5	11930.00	45.5 PK	74.0	-28.5	1.69 V	18	31.0	14.5
6	11930.00	33.9 AV	54.0	-20.1	1.69 V	18	19.4	14.5
7	17895.00	56.4 PK	74.0	-17.6	1.80 V	41	30.0	26.4
8	17895.00	44.2 AV	54.0	-9.8	1.80 V	41	17.8	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

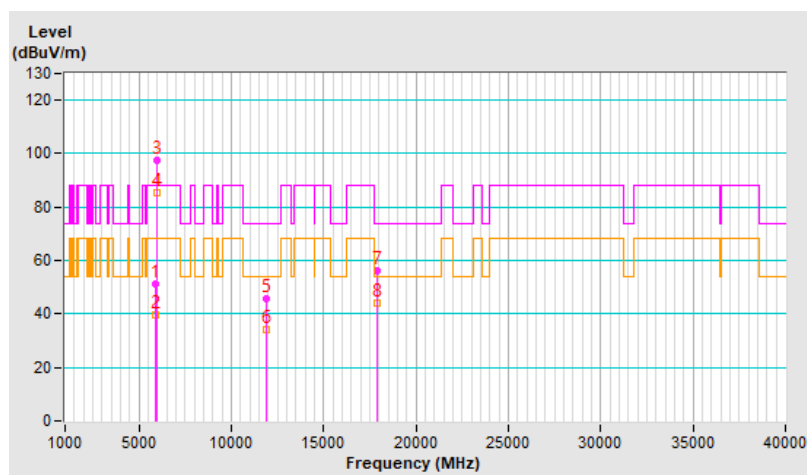


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	92.4 PK			1.00 H	168	86.5	5.9
2	*6205.00	81.8 AV			1.00 H	168	75.9	5.9
3	12410.00	45.8 PK	74.0	-28.2	1.71 H	19	31.1	14.7
4	12410.00	34.2 AV	54.0	-19.8	1.71 H	19	19.5	14.7
5	18615.00	56.7 PK	74.0	-17.3	1.75 H	43	62.1	-5.4
6	18615.00	44.2 AV	54.0	-9.8	1.75 H	43	49.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

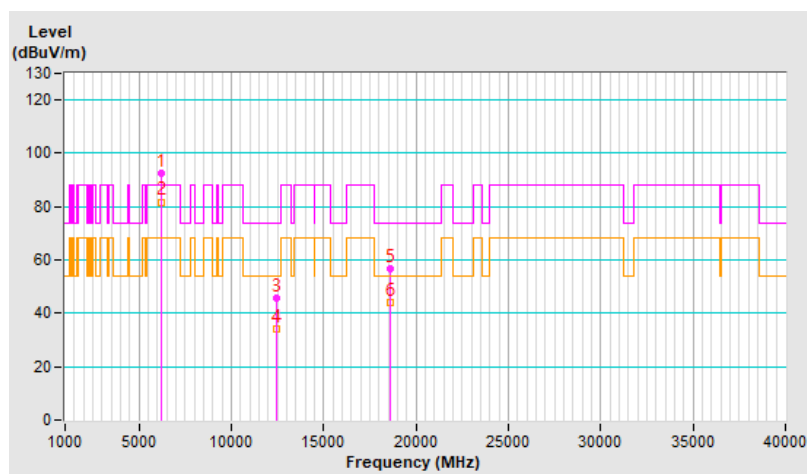


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	97.2 PK			1.13 V	68	91.3	5.9
2	*6205.00	85.2 AV			1.13 V	68	79.3	5.9
3	12410.00	45.9 PK	74.0	-28.1	1.63 V	0	31.2	14.7
4	12410.00	34.0 AV	54.0	-20.0	1.63 V	0	19.3	14.7
5	18615.00	56.1 PK	74.0	-17.9	1.80 V	47	61.5	-5.4
6	18615.00	44.1 AV	54.0	-9.9	1.80 V	47	49.5	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

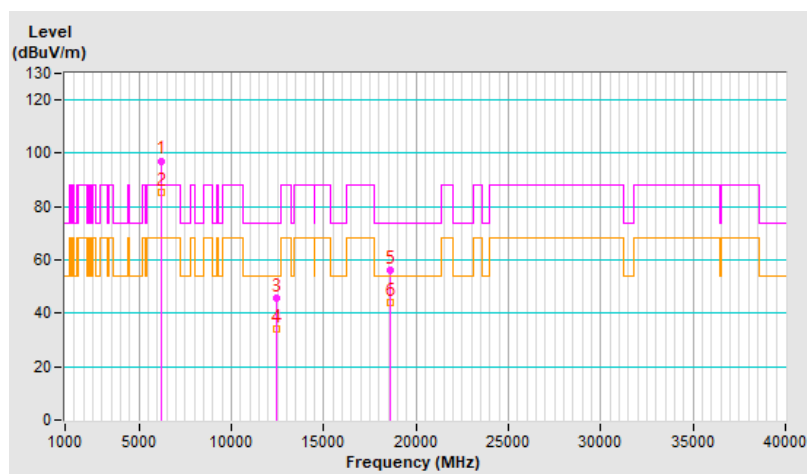


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	92.7 PK			1.01 H	160	86.0	6.7
2	*6405.00	82.1 AV			1.01 H	160	75.4	6.7
3	#12810.00	45.7 PK	88.2	-42.5	1.70 H	10	30.6	15.1
4	#12810.00	33.9 AV	68.2	-34.3	1.70 H	10	18.8	15.1
5	19215.00	56.0 PK	74.0	-18.0	1.78 H	59	60.7	-4.7
6	19215.00	43.6 AV	54.0	-10.4	1.78 H	59	48.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

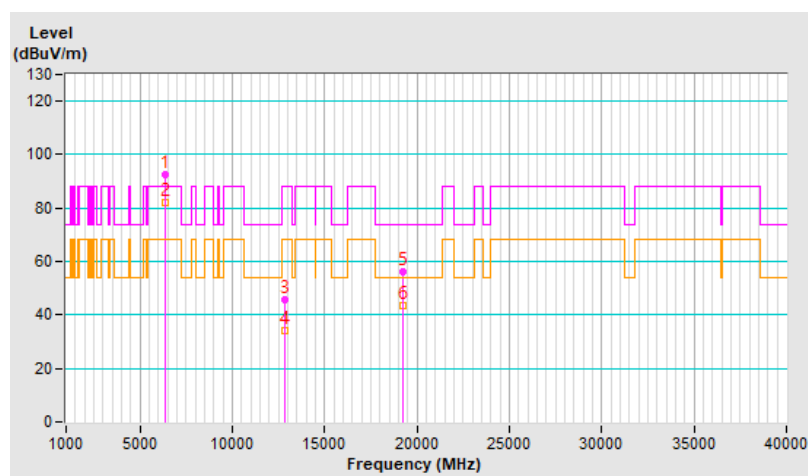


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	98.1 PK			1.13 V	69	91.4	6.7
2	*6405.00	85.8 AV			1.13 V	69	79.1	6.7
3	#12810.00	45.3 PK	88.2	-42.9	1.67 V	13	30.2	15.1
4	#12810.00	33.6 AV	68.2	-34.6	1.67 V	13	18.5	15.1
5	19215.00	55.8 PK	74.0	-18.2	1.79 V	50	60.5	-4.7
6	19215.00	44.0 AV	54.0	-10.0	1.79 V	50	48.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

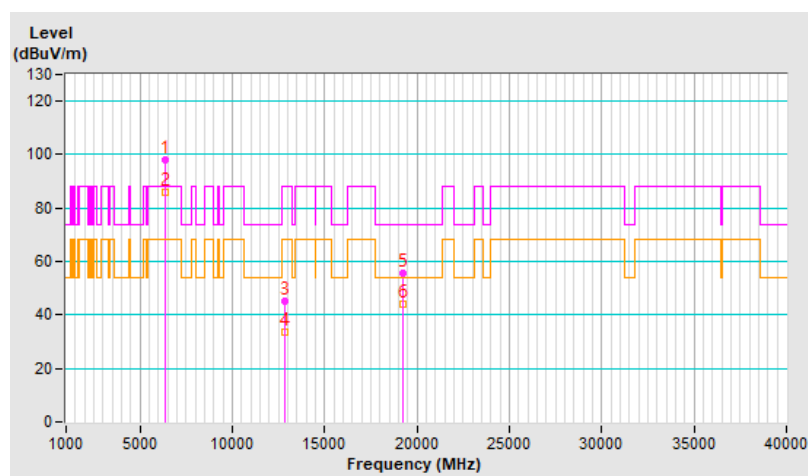


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	92.6 PK			1.01 H	159	85.1	7.5
2	*6565.00	82.1 AV			1.01 H	159	74.6	7.5
3	#13130.00	46.0 PK	88.2	-42.2	1.60 H	12	30.7	15.3
4	#13130.00	34.4 AV	68.2	-33.8	1.60 H	12	19.1	15.3
5	19695.00	56.3 PK	74.0	-17.7	1.78 H	49	60.7	-4.4
6	19695.00	43.9 AV	54.0	-10.1	1.78 H	49	48.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

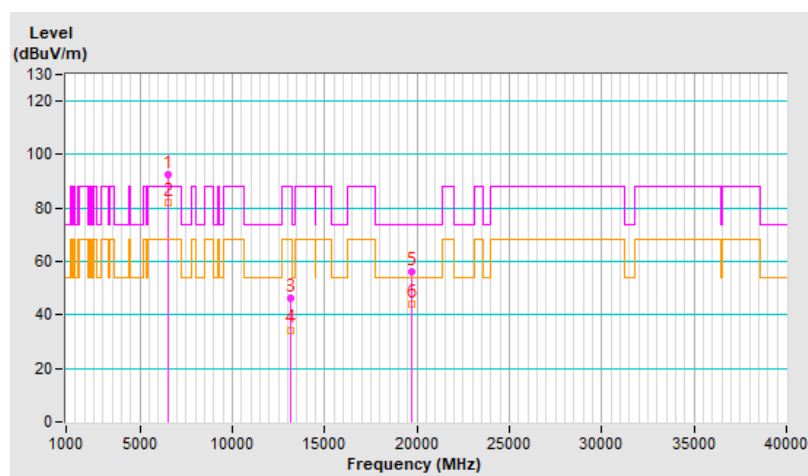


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	97.5 PK			1.12 V	63	90.0	7.5
2	*6565.00	85.2 AV			1.12 V	63	77.7	7.5
3	#13130.00	46.1 PK	88.2	-42.1	1.61 V	13	30.8	15.3
4	#13130.00	34.5 AV	68.2	-33.7	1.61 V	13	19.2	15.3
5	19695.00	55.7 PK	74.0	-18.3	1.80 V	63	60.1	-4.4
6	19695.00	43.8 AV	54.0	-10.2	1.80 V	63	48.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

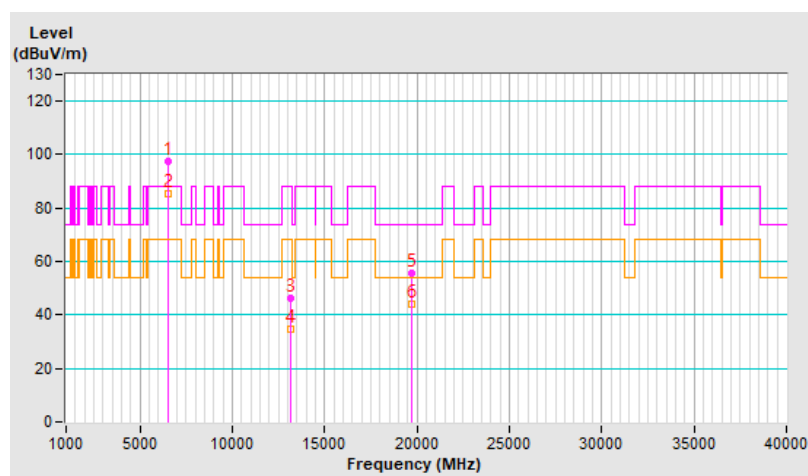


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	92.2 PK			1.06 H	155	84.5	7.7
2	*6685.00	81.6 AV			1.06 H	155	73.9	7.7
3	13370.00	46.3 PK	74.0	-27.7	1.62 H	15	31.0	15.3
4	13370.00	34.2 AV	54.0	-19.8	1.62 H	15	18.9	15.3
5	20055.00	56.0 PK	74.0	-18.0	1.82 H	60	60.4	-4.4
6	20055.00	43.7 AV	54.0	-10.3	1.82 H	60	48.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

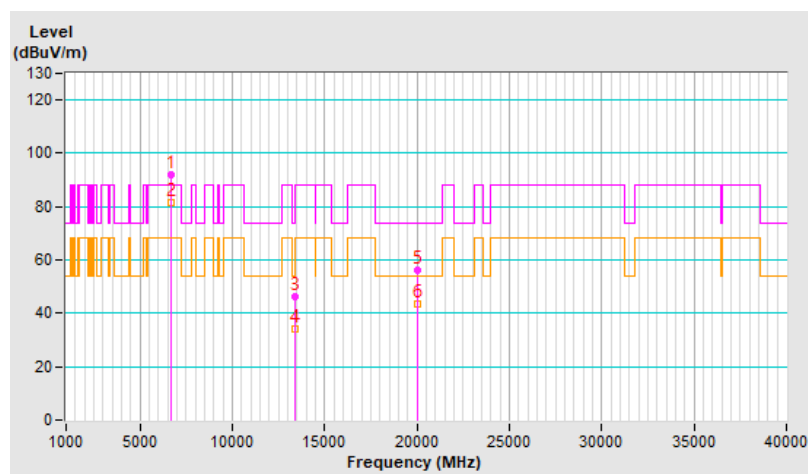


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	97.3 PK			1.18 V	67	89.6	7.7
2	*6685.00	85.0 AV			1.18 V	67	77.3	7.7
3	13370.00	45.5 PK	74.0	-28.5	1.58 V	3	30.2	15.3
4	13370.00	33.7 AV	54.0	-20.3	1.58 V	3	18.4	15.3
5	20055.00	55.6 PK	74.0	-18.4	1.75 V	53	60.0	-4.4
6	20055.00	43.7 AV	54.0	-10.3	1.75 V	53	48.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

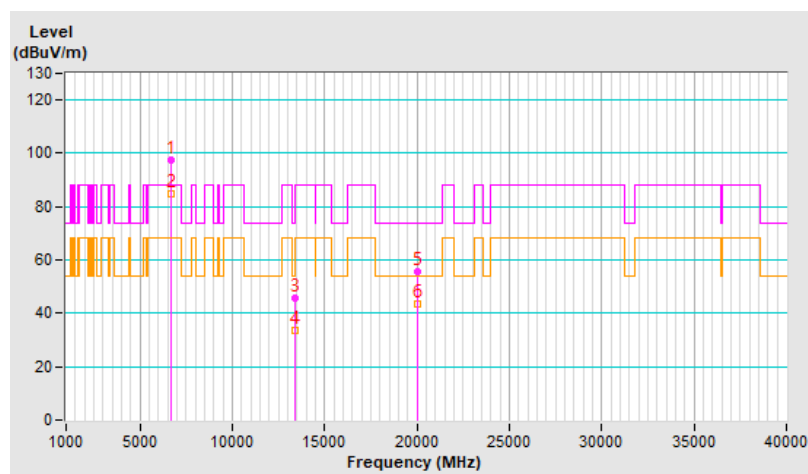


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	95.6 PK			2.40 H	196	87.4	8.2
2	*6845.00	82.8 AV			2.40 H	196	74.6	8.2
3	#13690.00	46.6 PK	88.2	-41.6	1.65 H	10	30.3	16.3
4	#13690.00	34.7 AV	68.2	-33.5	1.65 H	10	18.4	16.3
5	20535.00	56.7 PK	74.0	-17.3	1.75 H	58	60.4	-3.7
6	20535.00	44.3 AV	54.0	-9.7	1.75 H	58	48.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

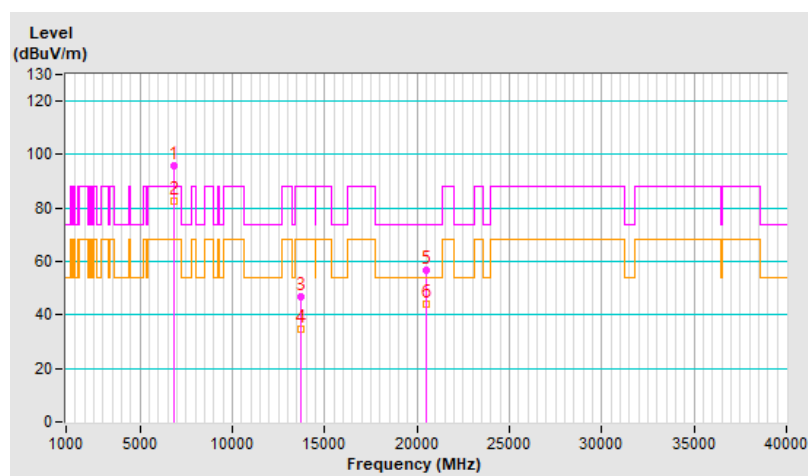


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	90.7 PK			1.33 V	333	82.5	8.2
2	*6845.00	80.9 AV			1.33 V	333	72.7	8.2
3	#13690.00	45.7 PK	88.2	-42.5	1.62 V	12	29.4	16.3
4	#13690.00	33.7 AV	68.2	-34.5	1.62 V	12	17.4	16.3
5	20535.00	56.1 PK	74.0	-17.9	1.74 V	66	59.8	-3.7
6	20535.00	44.3 AV	54.0	-9.7	1.74 V	66	48.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

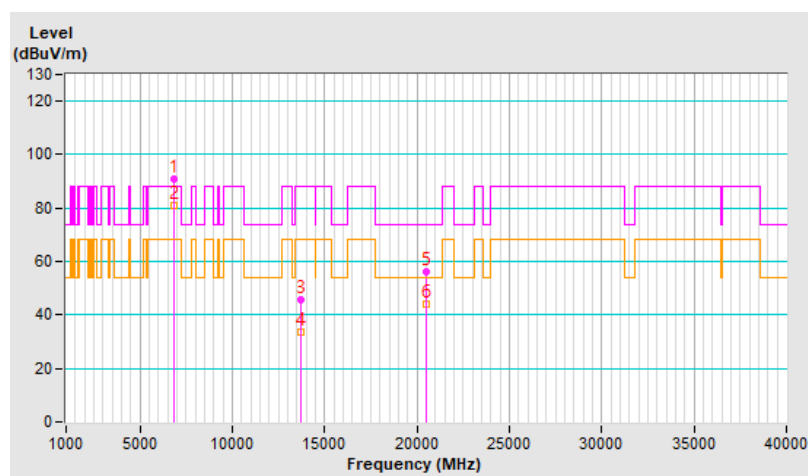


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.2 PK	88.2	-36.0	1.30 H	165	46.6	5.6
2	#5925.00	39.9 AV	68.2	-28.3	1.30 H	165	34.3	5.6
3	*5985.00	92.6 PK			1.30 H	165	87.1	5.5
4	*5985.00	81.8 AV			1.30 H	165	76.3	5.5
5	11970.00	45.7 PK	74.0	-28.3	1.65 H	6	31.2	14.5
6	11970.00	34.0 AV	54.0	-20.0	1.65 H	6	19.5	14.5
7	17955.00	56.1 PK	74.0	-17.9	1.78 H	39	27.8	28.3
8	17955.00	43.6 AV	54.0	-10.4	1.78 H	39	15.3	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

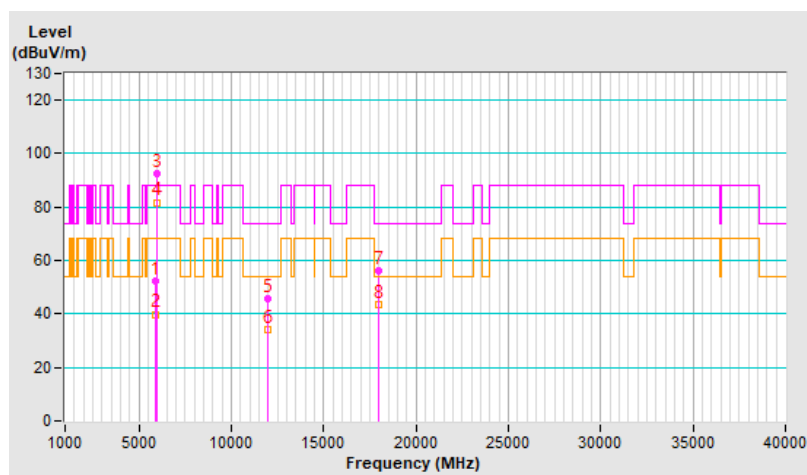


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.7 PK	88.2	-35.5	1.15 V	55	47.1	5.6
2	#5925.00	40.1 AV	68.2	-28.1	1.15 V	55	34.5	5.6
3	*5985.00	97.4 PK			1.15 V	55	91.9	5.5
4	*5985.00	86.2 AV			1.15 V	55	80.7	5.5
5	11970.00	45.7 PK	74.0	-28.3	1.60 V	25	31.2	14.5
6	11970.00	34.1 AV	54.0	-19.9	1.60 V	25	19.6	14.5
7	17955.00	56.4 PK	74.0	-17.6	1.73 V	62	28.1	28.3
8	17955.00	44.2 AV	54.0	-9.8	1.73 V	62	15.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

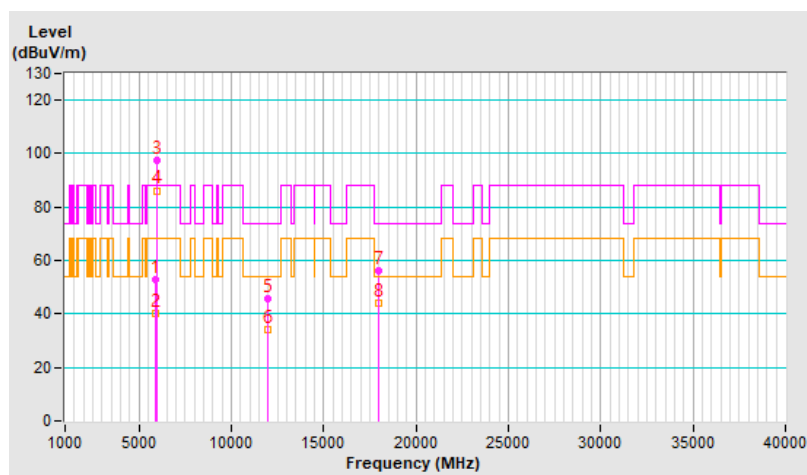


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	93.2 PK			1.32 H	157	87.3	5.9
2	*6225.00	82.3 AV			1.32 H	157	76.4	5.9
3	12450.00	46.2 PK	74.0	-27.8	1.70 H	0	31.6	14.6
4	12450.00	34.1 AV	54.0	-19.9	1.70 H	0	19.5	14.6
5	18675.00	56.8 PK	74.0	-17.2	1.77 H	48	62.1	-5.3
6	18675.00	44.2 AV	54.0	-9.8	1.77 H	48	49.5	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

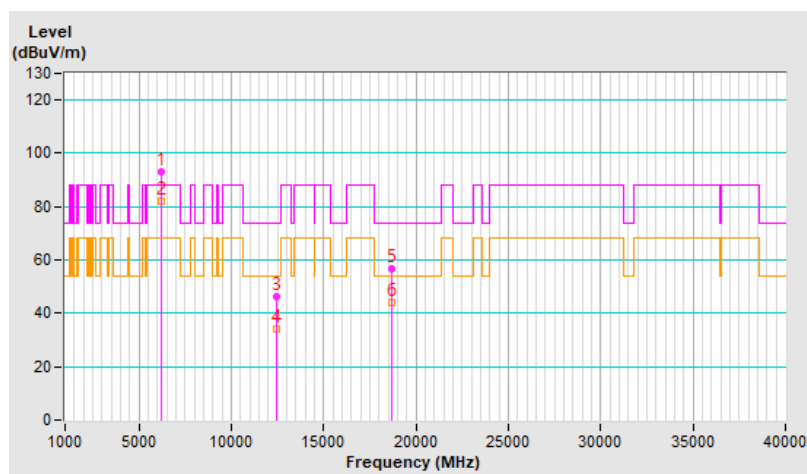


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	97.9 PK			1.13 V	52	92.0	5.9
2	*6225.00	86.5 AV			1.13 V	52	80.6	5.9
3	12450.00	46.1 PK	74.0	-27.9	1.63 V	11	31.5	14.6
4	12450.00	34.5 AV	54.0	-19.5	1.63 V	11	19.9	14.6
5	18675.00	55.9 PK	74.0	-18.1	1.76 V	45	61.2	-5.3
6	18675.00	44.1 AV	54.0	-9.9	1.76 V	45	49.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

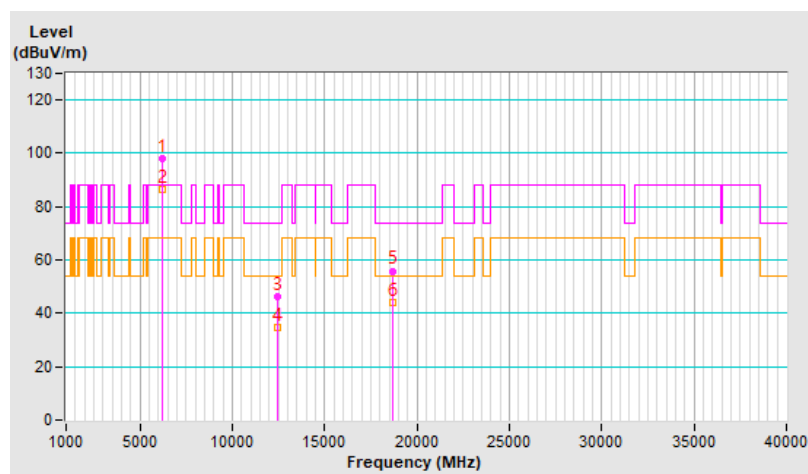


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	92.7 PK			1.29 H	171	86.1	6.6
2	*6385.00	82.1 AV			1.29 H	171	75.5	6.6
3	#12770.00	46.9 PK	88.2	-41.3	1.64 H	15	32.0	14.9
4	#12770.00	34.7 AV	68.2	-33.5	1.64 H	15	19.8	14.9
5	19155.00	57.1 PK	74.0	-16.9	1.82 H	39	61.8	-4.7
6	19155.00	44.4 AV	54.0	-9.6	1.82 H	39	49.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

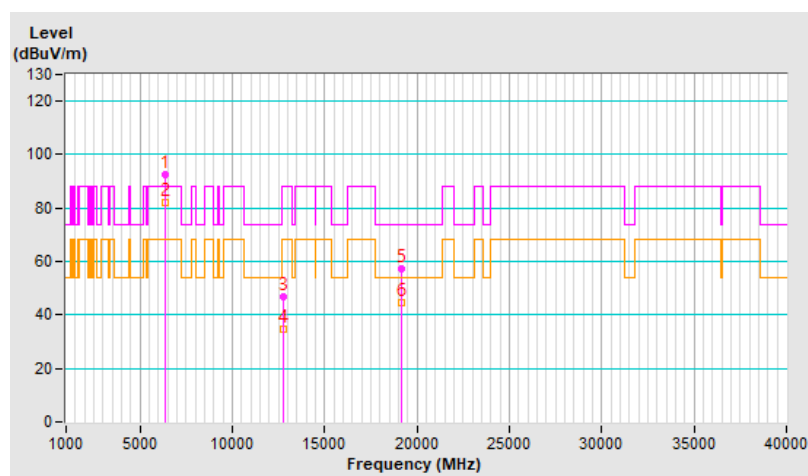


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	97.5 PK			1.14 V	65	90.9	6.6
2	*6385.00	86.1 AV			1.14 V	65	79.5	6.6
3	#12770.00	45.5 PK	88.2	-42.7	1.69 V	9	30.6	14.9
4	#12770.00	33.6 AV	68.2	-34.6	1.69 V	9	18.7	14.9
5	19155.00	56.0 PK	74.0	-18.0	1.77 V	55	60.7	-4.7
6	19155.00	44.0 AV	54.0	-10.0	1.77 V	55	48.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

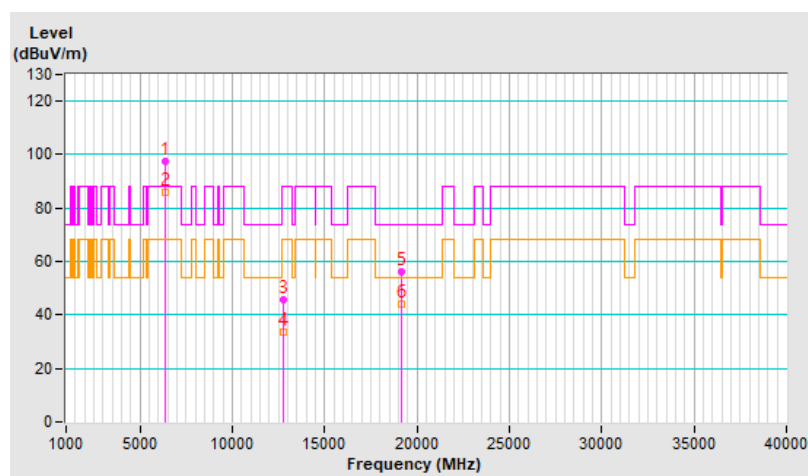


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	92.4 PK			1.24 H	157	84.6	7.8
2	*6625.00	81.8 AV			1.24 H	157	74.0	7.8
3	13250.00	46.1 PK	74.0	-27.9	1.68 H	9	30.7	15.4
4	13250.00	34.1 AV	54.0	-19.9	1.68 H	9	18.7	15.4
5	19875.00	56.6 PK	74.0	-17.4	1.77 H	50	61.1	-4.5
6	19875.00	44.1 AV	54.0	-9.9	1.77 H	50	48.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

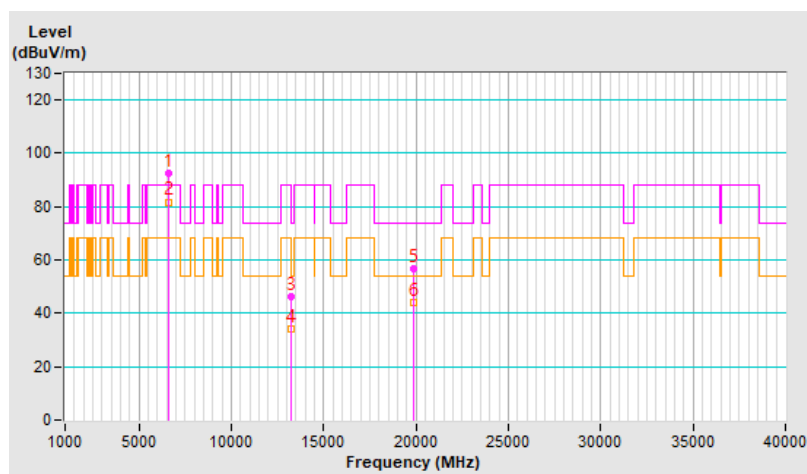


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	97.6 PK			1.19 V	58	89.8	7.8
2	*6625.00	86.7 AV			1.19 V	58	78.9	7.8
3	13250.00	46.0 PK	74.0	-28.0	1.65 V	18	30.6	15.4
4	13250.00	34.4 AV	54.0	-19.6	1.65 V	18	19.0	15.4
5	19875.00	56.0 PK	74.0	-18.0	1.79 V	49	60.5	-4.5
6	19875.00	43.8 AV	54.0	-10.2	1.79 V	49	48.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

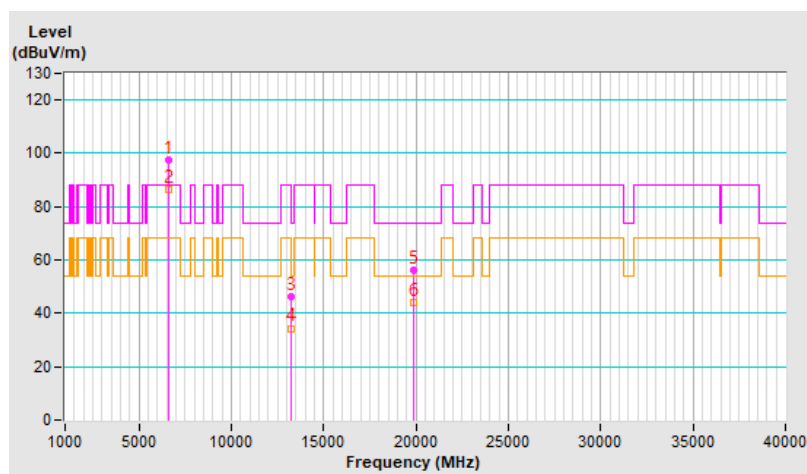


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	92.7 PK			1.35 H	178	85.1	7.6
2	*6705.00	81.8 AV			1.35 H	178	74.2	7.6
3	#13410.00	46.8 PK	88.2	-41.4	1.70 H	13	31.4	15.4
4	#13410.00	34.7 AV	68.2	-33.5	1.70 H	13	19.3	15.4
5	20115.00	56.5 PK	74.0	-17.5	1.75 H	34	60.6	-4.1
6	20115.00	44.2 AV	54.0	-9.8	1.75 H	34	48.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

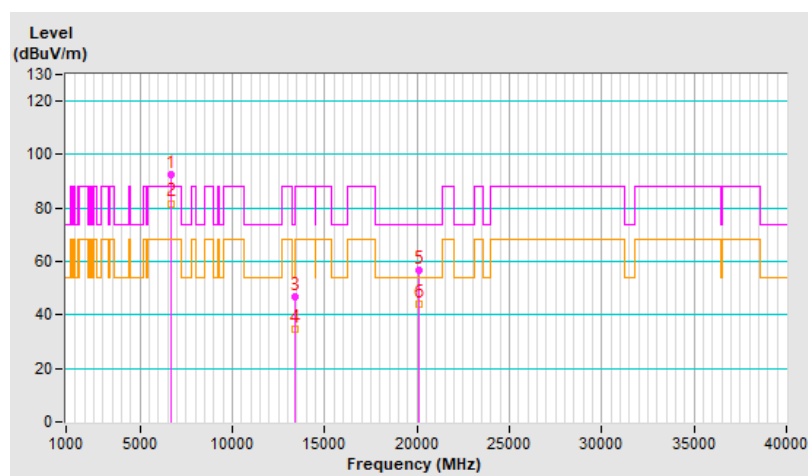


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	97.3 PK			1.09 V	44	89.7	7.6
2	*6705.00	86.4 AV			1.09 V	44	78.8	7.6
3	#13410.00	46.4 PK	88.2	-41.8	1.59 V	15	31.0	15.4
4	#13410.00	34.5 AV	68.2	-33.7	1.59 V	15	19.1	15.4
5	20115.00	56.1 PK	74.0	-17.9	1.76 V	51	60.2	-4.1
6	20115.00	44.4 AV	54.0	-9.6	1.76 V	51	48.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

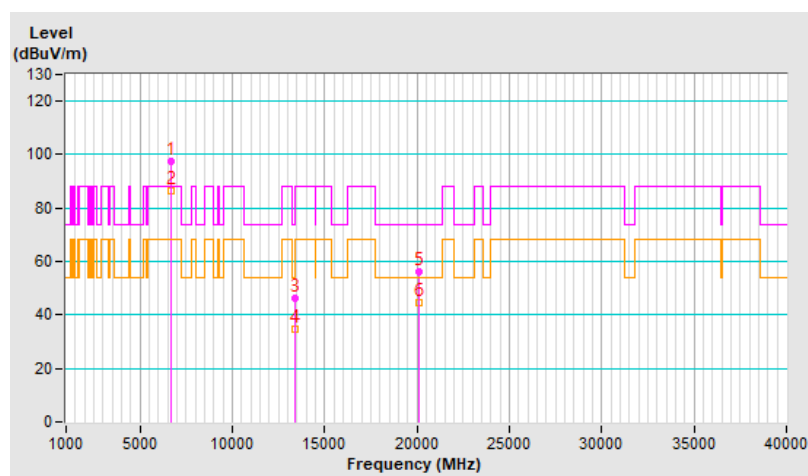


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	97.3 PK			2.40 H	202	89.6	7.7
2	*6785.00	86.6 AV			2.40 H	202	78.9	7.7
3	#13570.00	46.6 PK	88.2	-41.6	1.67 H	18	30.9	15.7
4	#13570.00	34.4 AV	68.2	-33.8	1.67 H	18	18.7	15.7
5	20355.00	56.3 PK	74.0	-17.7	1.79 H	54	60.1	-3.8
6	20355.00	43.7 AV	54.0	-10.3	1.79 H	54	47.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

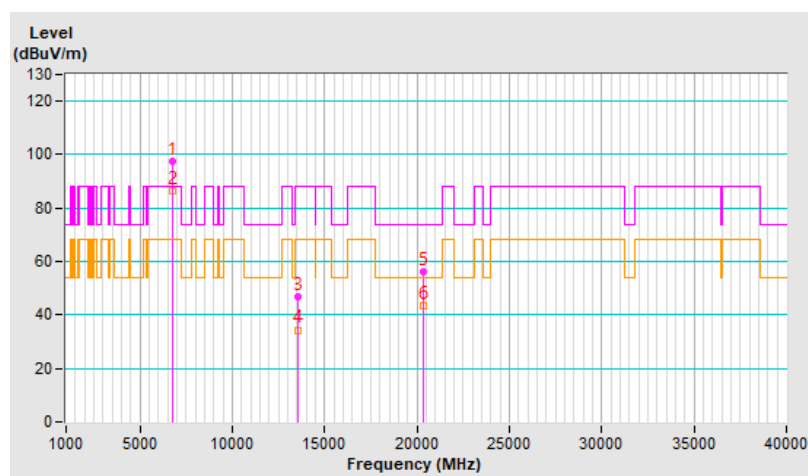


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	92.0 PK			1.70 V	335	84.3	7.7
2	*6785.00	81.3 AV			1.70 V	335	73.6	7.7
3	#13570.00	46.0 PK	88.2	-42.2	1.66 V	8	30.3	15.7
4	#13570.00	34.5 AV	68.2	-33.7	1.66 V	8	18.8	15.7
5	20355.00	56.5 PK	74.0	-17.5	1.76 V	37	60.3	-3.8
6	20355.00	44.2 AV	54.0	-9.8	1.76 V	37	48.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

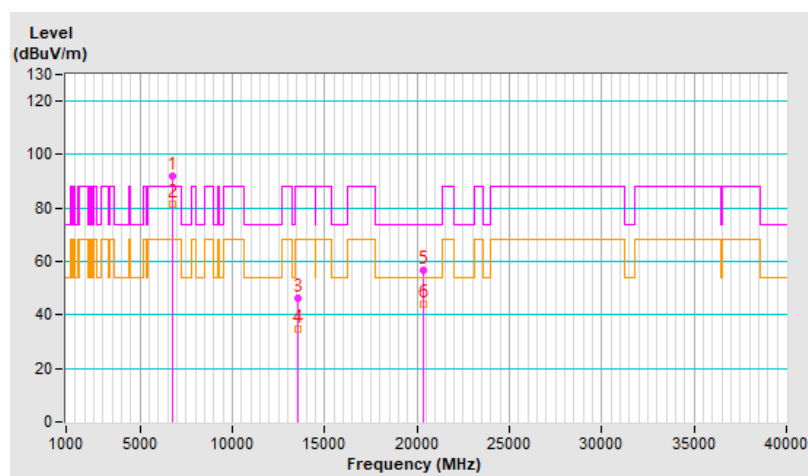


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.4 PK	88.2	-33.8	1.10 H	165	48.8	5.6
2	#5925.00	40.8 AV	68.2	-27.4	1.10 H	165	35.2	5.6
3	*6025.00	92.6 PK			1.10 H	165	87.0	5.6
4	*6025.00	81.0 AV			1.10 H	165	75.4	5.6
5	12050.00	46.0 PK	74.0	-28.0	1.67 H	5	31.4	14.6
6	12050.00	33.9 AV	54.0	-20.1	1.67 H	5	19.3	14.6
7	18075.00	56.4 PK	74.0	-17.6	1.79 H	35	61.7	-5.3
8	18075.00	44.1 AV	54.0	-9.9	1.79 H	35	49.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

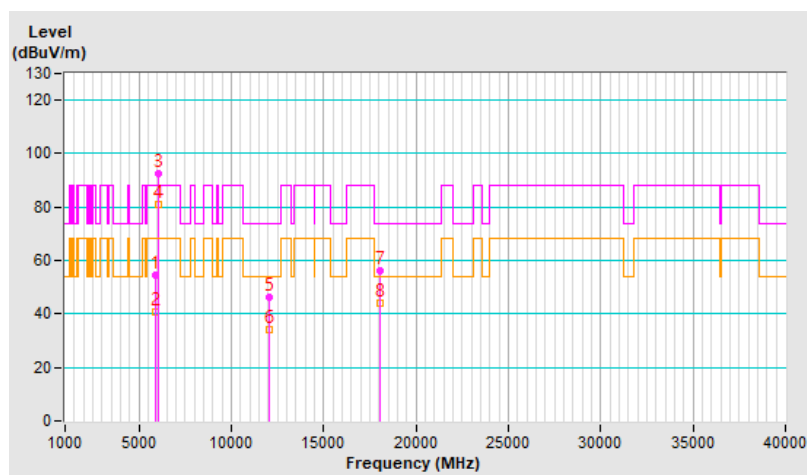


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.2 PK	88.2	-32.0	1.04 V	50	50.6	5.6
2	#5925.00	42.2 AV	68.2	-26.0	1.04 V	50	36.6	5.6
3	*6025.00	95.8 PK			1.04 V	50	90.2	5.6
4	*6025.00	84.5 AV			1.04 V	50	78.9	5.6
5	12050.00	45.8 PK	74.0	-28.2	1.62 V	25	31.2	14.6
6	12050.00	33.7 AV	54.0	-20.3	1.62 V	25	19.1	14.6
7	18075.00	56.6 PK	74.0	-17.4	1.77 V	42	61.9	-5.3
8	18075.00	44.5 AV	54.0	-9.5	1.77 V	42	49.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

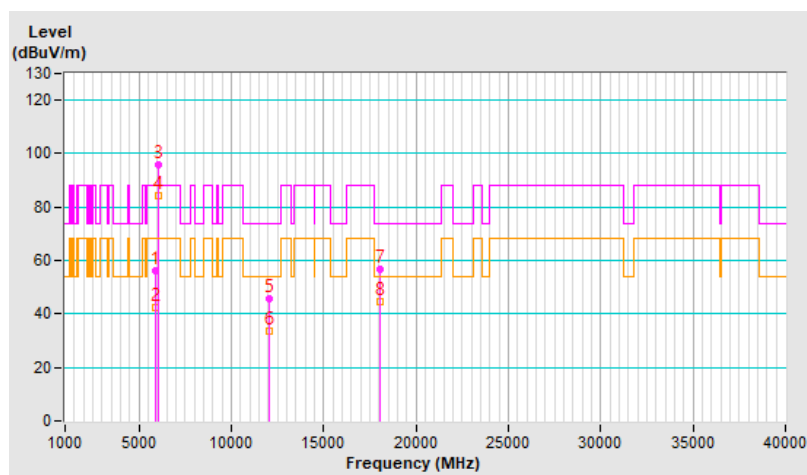


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	93.1 PK			1.12 H	176	87.3	5.8
2	*6185.00	81.3 AV			1.12 H	176	75.5	5.8
3	12370.00	46.7 PK	74.0	-27.3	1.66 H	13	32.0	14.7
4	12370.00	34.8 AV	54.0	-19.2	1.66 H	13	20.1	14.7
5	18555.00	56.1 PK	74.0	-17.9	1.79 H	44	61.5	-5.4
6	18555.00	43.8 AV	54.0	-10.2	1.79 H	44	49.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

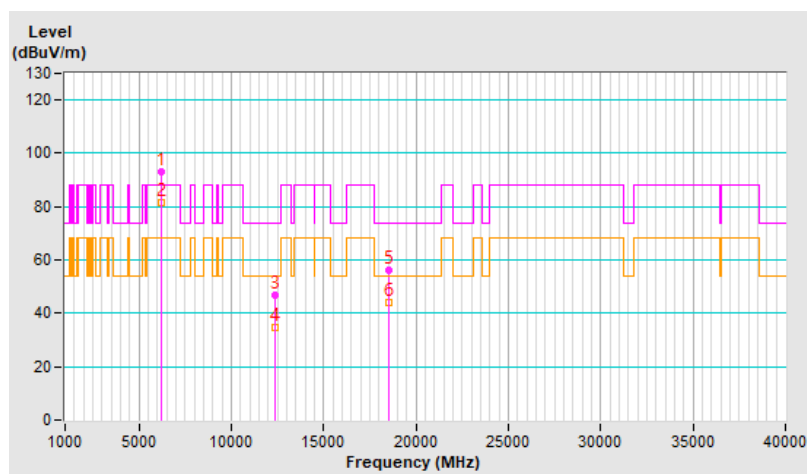


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	95.8 PK			1.02 V	51	90.0	5.8
2	*6185.00	84.6 AV			1.02 V	51	78.8	5.8
3	12370.00	45.7 PK	74.0	-28.3	1.62 V	1	31.0	14.7
4	12370.00	33.7 AV	54.0	-20.3	1.62 V	1	19.0	14.7
5	18555.00	56.2 PK	74.0	-17.8	1.81 V	52	61.6	-5.4
6	18555.00	44.1 AV	54.0	-9.9	1.81 V	52	49.5	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

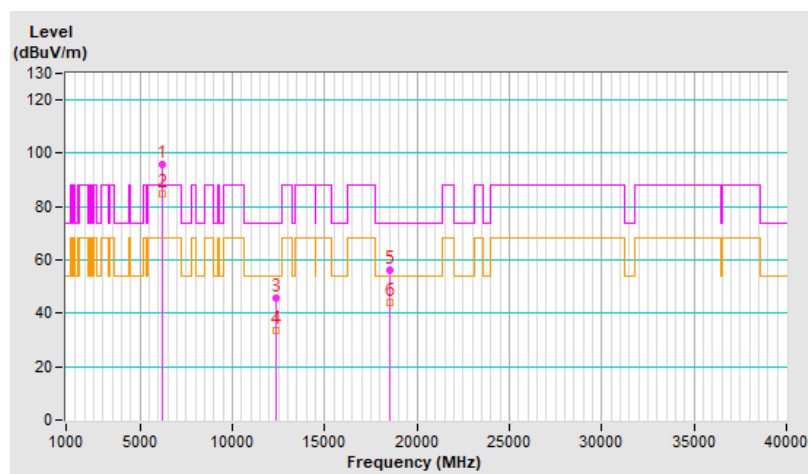


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	92.3 PK			1.14 H	181	85.9	6.4
2	*6345.00	80.9 AV			1.14 H	181	74.5	6.4
3	12690.00	46.0 PK	74.0	-28.0	1.63 H	0	31.1	14.9
4	12690.00	34.0 AV	54.0	-20.0	1.63 H	0	19.1	14.9
5	19035.00	57.2 PK	74.0	-16.8	1.80 H	47	62.1	-4.9
6	19035.00	44.5 AV	54.0	-9.5	1.80 H	47	49.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

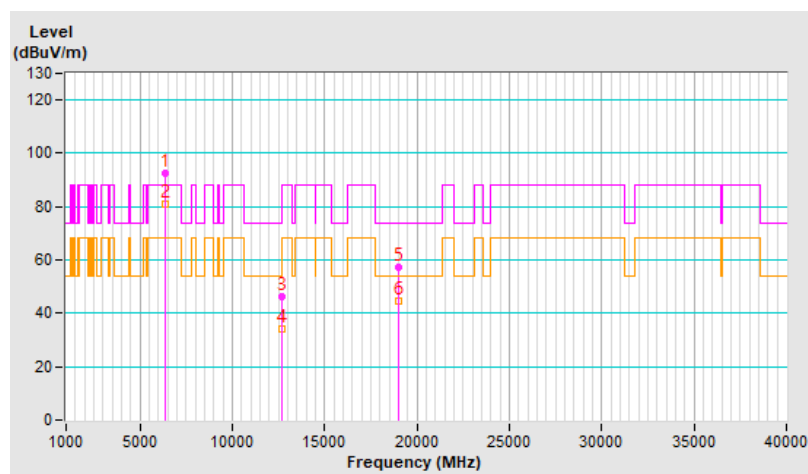


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	95.5 PK			1.01 V	38	89.1	6.4
2	*6345.00	84.3 AV			1.01 V	38	77.9	6.4
3	12690.00	45.7 PK	74.0	-28.3	1.63 V	5	30.8	14.9
4	12690.00	34.1 AV	54.0	-19.9	1.63 V	5	19.2	14.9
5	19035.00	56.2 PK	74.0	-17.8	1.73 V	65	61.1	-4.9
6	19035.00	44.1 AV	54.0	-9.9	1.73 V	65	49.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

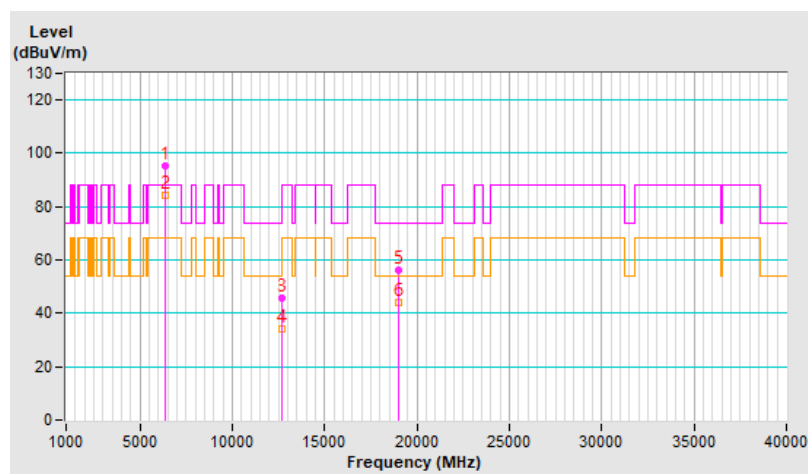


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	93.0 PK			2.24 H	339	85.2	7.8
2	*6665.00	80.6 AV			2.24 H	339	72.8	7.8
3	13330.00	46.6 PK	74.0	-27.4	1.68 H	15	31.3	15.3
4	13330.00	34.4 AV	54.0	-19.6	1.68 H	15	19.1	15.3
5	19995.00	56.2 PK	74.0	-17.8	1.81 H	47	60.6	-4.4
6	19995.00	43.8 AV	54.0	-10.2	1.81 H	47	48.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

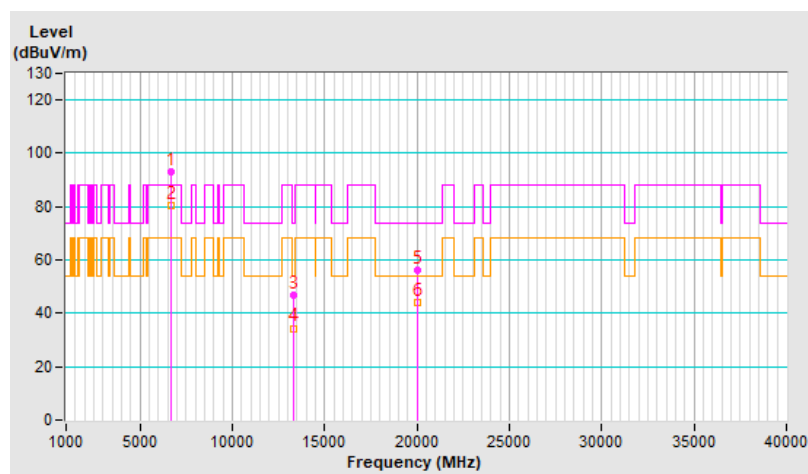


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	91.3 PK			1.69 V	334	83.5	7.8
2	*6665.00	80.1 AV			1.69 V	334	72.3	7.8
3	13330.00	46.0 PK	74.0	-28.0	1.58 V	7	30.7	15.3
4	13330.00	34.2 AV	54.0	-19.8	1.58 V	7	18.9	15.3
5	19995.00	56.4 PK	74.0	-17.6	1.74 V	46	60.8	-4.4
6	19995.00	44.5 AV	54.0	-9.5	1.74 V	46	48.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

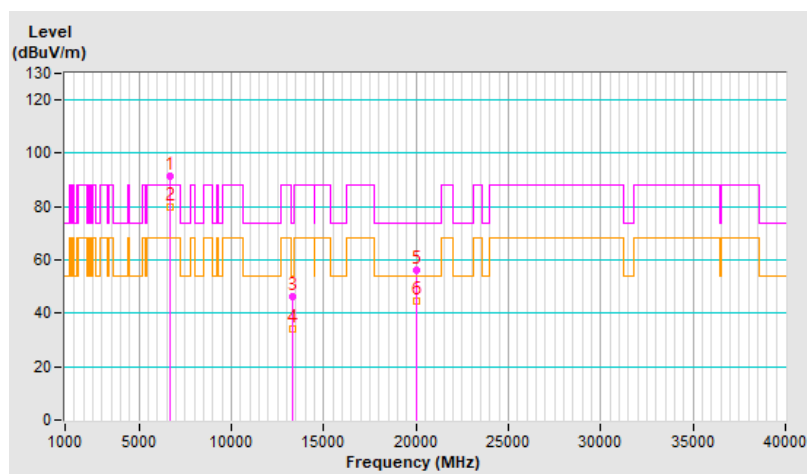


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.12 H	165	46.0	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.12 H	165	33.8	5.6
3	*5955.00	90.9 PK			1.12 H	165	85.4	5.5
4	*5955.00	80.8 AV			1.12 H	165	75.3	5.5
5	11910.00	46.0 PK	74.0	-28.0	1.65 H	0	31.4	14.6
6	11910.00	33.9 AV	54.0	-20.1	1.65 H	0	19.3	14.6
7	17865.00	56.4 PK	74.0	-17.6	1.77 H	35	30.5	25.9
8	17865.00	43.7 AV	54.0	-10.3	1.77 H	35	17.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

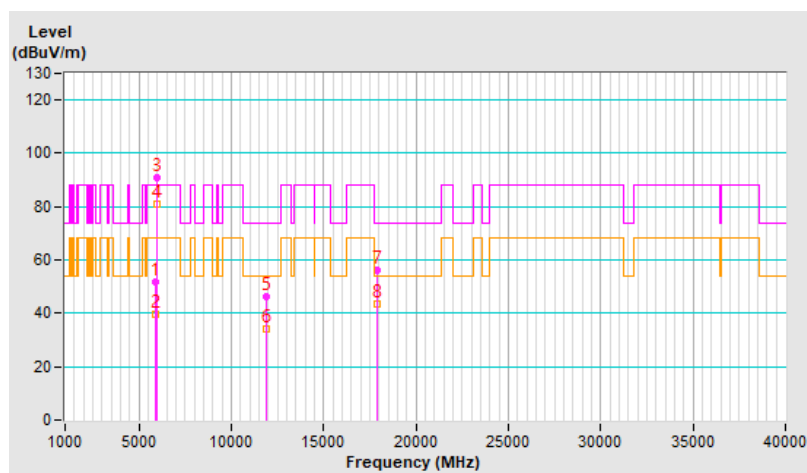


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.00 V	44	45.9	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.00 V	44	34.1	5.6
3	*5955.00	93.7 PK			1.00 V	44	88.2	5.5
4	*5955.00	84.1 AV			1.00 V	44	78.6	5.5
5	11910.00	45.2 PK	74.0	-28.8	1.64 V	4	30.6	14.6
6	11910.00	33.6 AV	54.0	-20.4	1.64 V	4	19.0	14.6
7	17865.00	55.8 PK	74.0	-18.2	1.86 V	47	29.9	25.9
8	17865.00	43.7 AV	54.0	-10.3	1.86 V	47	17.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

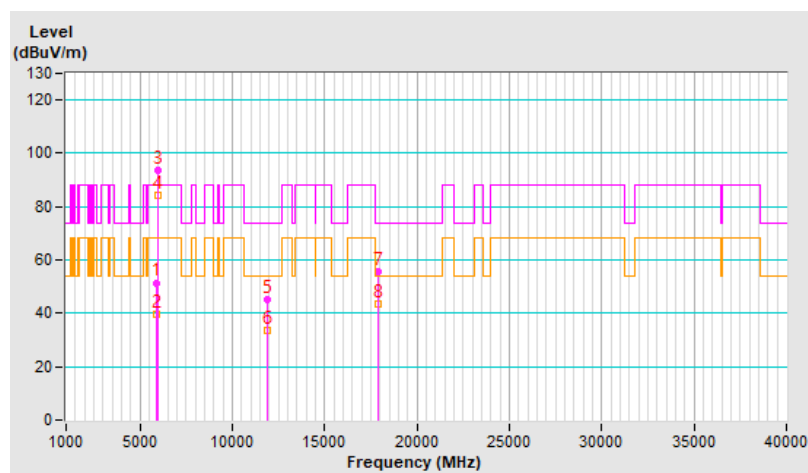


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	90.4 PK			1.16 H	173	84.6	5.8
2	*6195.00	80.5 AV			1.16 H	173	74.7	5.8
3	12390.00	47.0 PK	74.0	-27.0	1.67 H	18	32.3	14.7
4	12390.00	34.8 AV	54.0	-19.2	1.67 H	18	20.1	14.7
5	18585.00	57.1 PK	74.0	-16.9	1.77 H	36	62.6	-5.5
6	18585.00	44.4 AV	54.0	-9.6	1.77 H	36	49.9	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

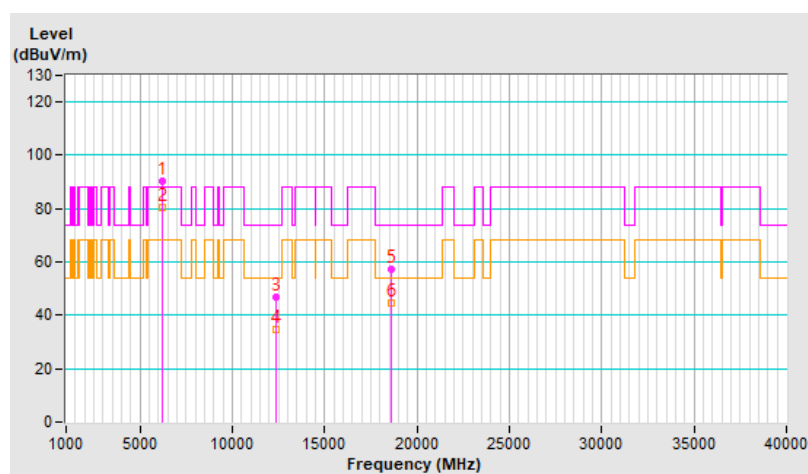


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	93.7 PK			1.03 V	54	87.9	5.8
2	*6195.00	84.1 AV			1.03 V	54	78.3	5.8
3	12390.00	45.7 PK	74.0	-28.3	1.57 V	26	31.0	14.7
4	12390.00	33.9 AV	54.0	-20.1	1.57 V	26	19.2	14.7
5	18585.00	55.9 PK	74.0	-18.1	1.85 V	50	61.4	-5.5
6	18585.00	43.6 AV	54.0	-10.4	1.85 V	50	49.1	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

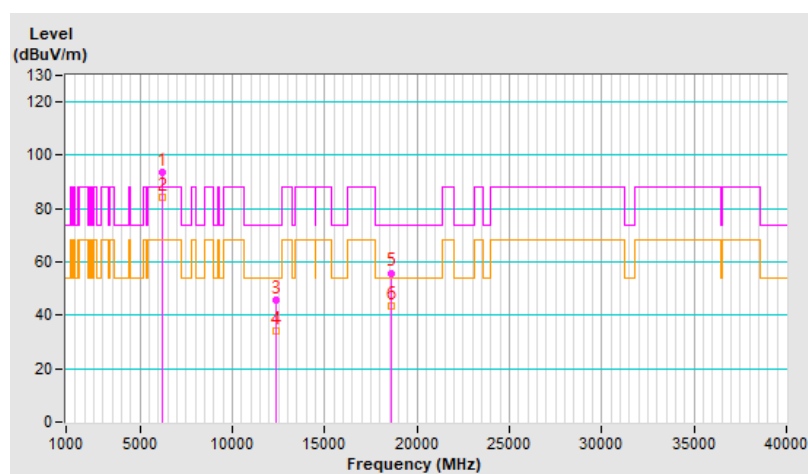


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	90.6 PK			1.18 H	164	83.8	6.8
2	*6415.00	80.5 AV			1.18 H	164	73.7	6.8
3	#12830.00	45.7 PK	88.2	-42.5	1.62 H	0	30.6	15.1
4	#12830.00	33.9 AV	68.2	-34.3	1.62 H	0	18.8	15.1
5	19245.00	56.8 PK	74.0	-17.2	1.80 H	57	61.4	-4.6
6	19245.00	44.2 AV	54.0	-9.8	1.80 H	57	48.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

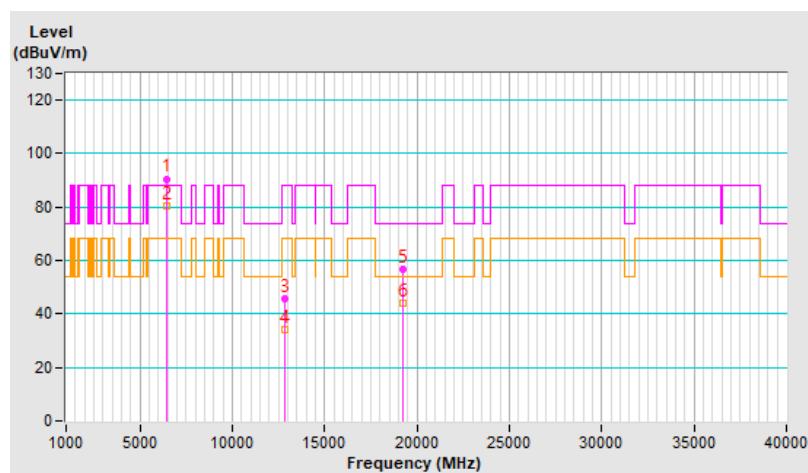


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	93.5 PK			1.01 V	43	86.7	6.8
2	*6415.00	84.1 AV			1.01 V	43	77.3	6.8
3	#12830.00	46.1 PK	88.2	-42.1	1.62 V	5	31.0	15.1
4	#12830.00	34.4 AV	68.2	-33.8	1.62 V	5	19.3	15.1
5	19245.00	56.0 PK	74.0	-18.0	1.74 V	63	60.6	-4.6
6	19245.00	43.9 AV	54.0	-10.1	1.74 V	63	48.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

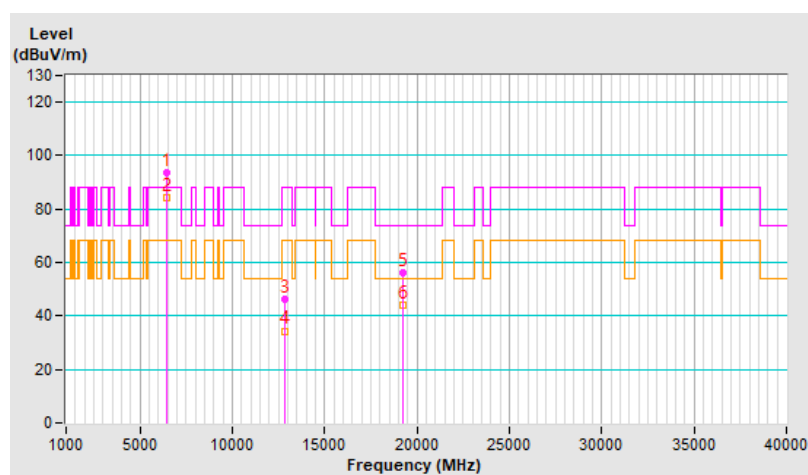


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	90.6 PK			1.15 H	160	83.2	7.4
2	*6535.00	80.8 AV			1.15 H	160	73.4	7.4
3	#13070.00	46.3 PK	88.2	-41.9	1.62 H	0	31.2	15.1
4	#13070.00	34.4 AV	68.2	-33.8	1.62 H	0	19.3	15.1
5	19605.00	56.7 PK	74.0	-17.3	1.73 H	53	61.5	-4.8
6	19605.00	44.1 AV	54.0	-9.9	1.73 H	53	48.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

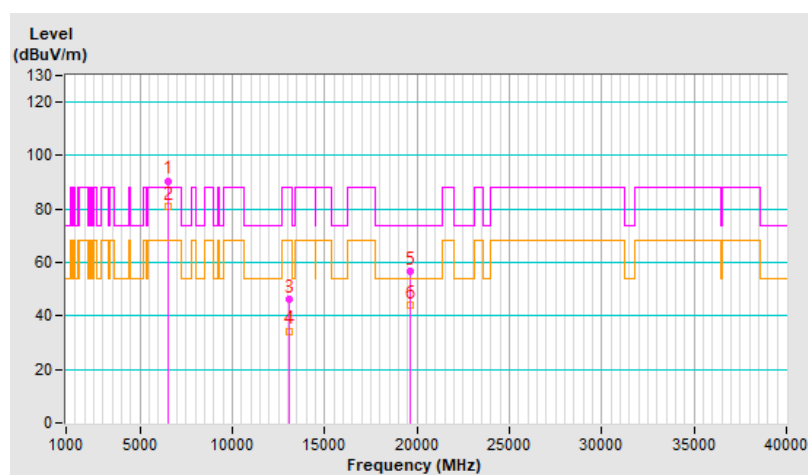


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	93.4 PK			1.00 V	30	86.0	7.4
2	*6535.00	83.8 AV			1.00 V	30	76.4	7.4
3	#13070.00	46.2 PK	88.2	-42.0	1.59 V	9	31.1	15.1
4	#13070.00	34.3 AV	68.2	-33.9	1.59 V	9	19.2	15.1
5	19605.00	55.9 PK	74.0	-18.1	1.79 V	38	60.7	-4.8
6	19605.00	43.3 AV	54.0	-10.7	1.79 V	38	48.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

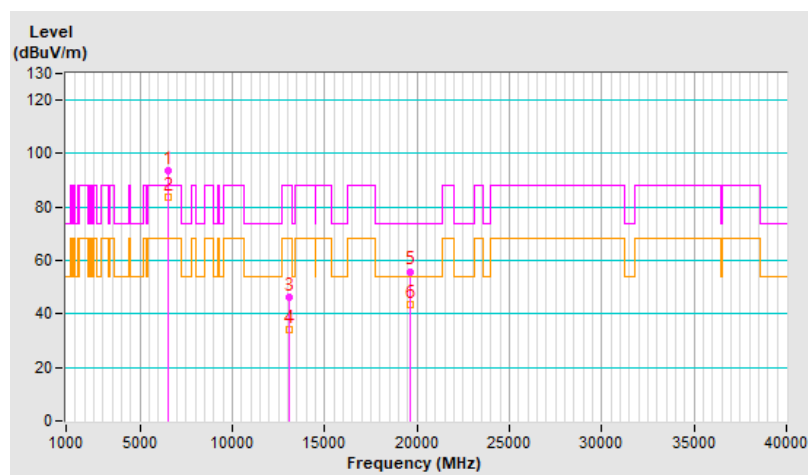


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	90.9 PK			1.15 H	163	83.2	7.7
2	*6695.00	81.1 AV			1.15 H	163	73.4	7.7
3	13390.00	46.7 PK	74.0	-27.3	1.63 H	0	31.3	15.4
4	13390.00	34.8 AV	54.0	-19.2	1.63 H	0	19.4	15.4
5	20085.00	56.5 PK	74.0	-17.5	1.78 H	59	60.8	-4.3
6	20085.00	43.8 AV	54.0	-10.2	1.78 H	59	48.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

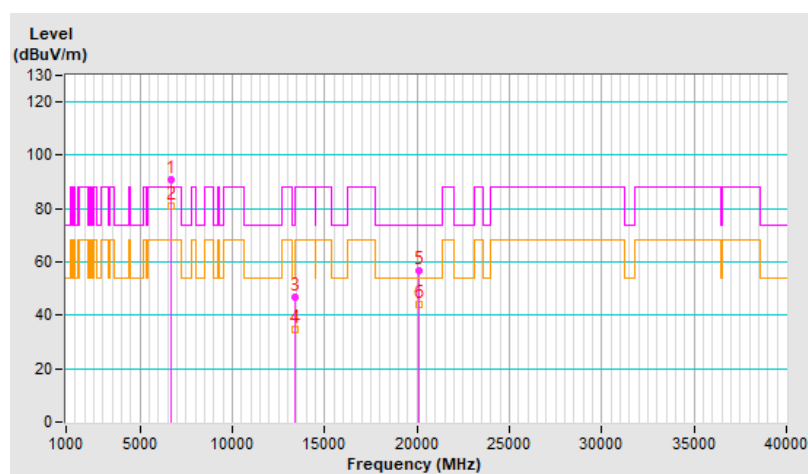


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	93.2 PK			1.05 V	39	85.5	7.7
2	*6695.00	83.8 AV			1.05 V	39	76.1	7.7
3	13390.00	45.6 PK	74.0	-28.4	1.62 V	24	30.2	15.4
4	13390.00	33.6 AV	54.0	-20.4	1.62 V	24	18.2	15.4
5	20085.00	55.7 PK	74.0	-18.3	1.76 V	56	60.0	-4.3
6	20085.00	43.6 AV	54.0	-10.4	1.76 V	56	47.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

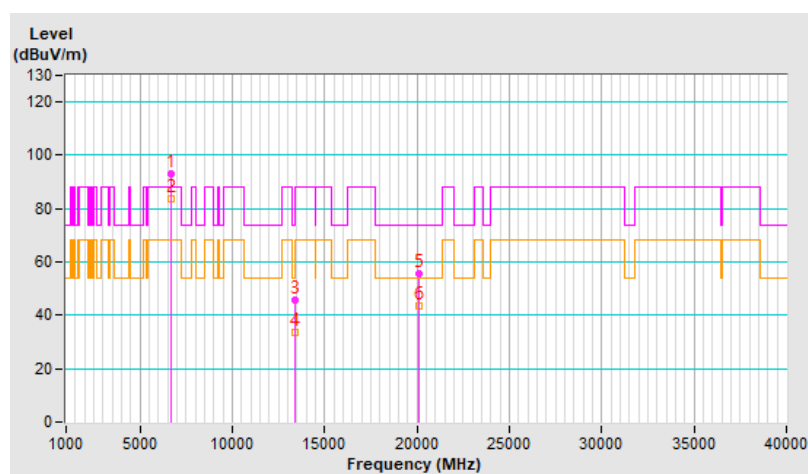


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.8 PK			2.38 H	205	87.6	8.2
2	*6855.00	85.8 AV			2.38 H	205	77.6	8.2
3	#13710.00	46.2 PK	88.2	-42.0	1.71 H	8	29.9	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.71 H	8	18.3	16.3
5	20565.00	56.6 PK	74.0	-17.4	1.76 H	56	60.3	-3.7
6	20565.00	43.9 AV	54.0	-10.1	1.76 H	56	47.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

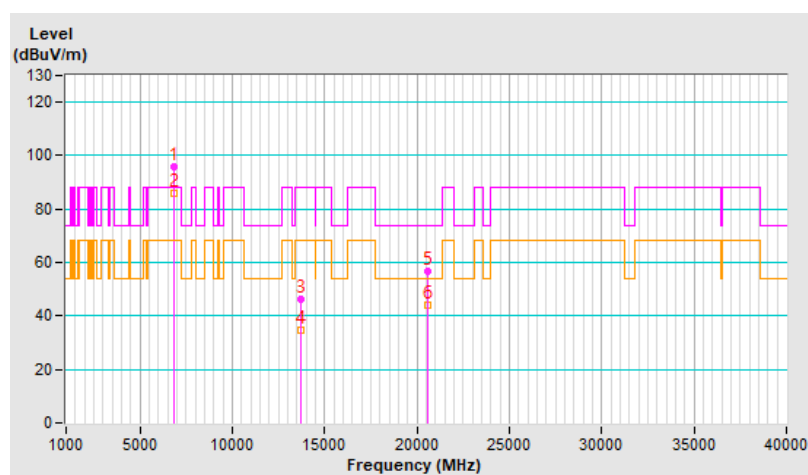


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	88.5 PK			2.12 V	18	80.3	8.2
2	*6855.00	79.2 AV			2.12 V	18	71.0	8.2
3	#13710.00	45.4 PK	88.2	-42.8	1.58 V	19	29.1	16.3
4	#13710.00	33.8 AV	68.2	-34.4	1.58 V	19	17.5	16.3
5	20565.00	56.3 PK	74.0	-17.7	1.78 V	61	60.0	-3.7
6	20565.00	44.3 AV	54.0	-9.7	1.78 V	61	48.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

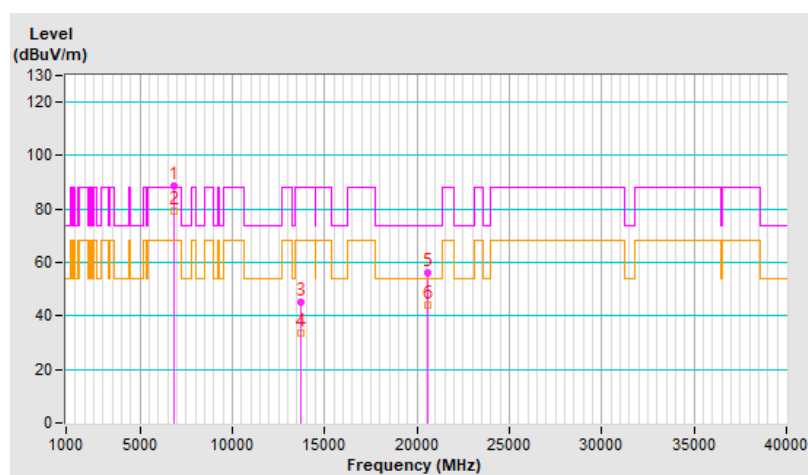


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.3 PK	88.2	-35.9	1.13 H	164	46.7	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.13 H	164	34.0	5.6
3	*5955.00	91.5 PK			1.13 H	164	86.0	5.5
4	*5955.00	81.8 AV			1.13 H	164	76.3	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.65 H	7	31.6	14.6
6	11910.00	34.1 AV	54.0	-19.9	1.65 H	7	19.5	14.6
7	17865.00	56.9 PK	74.0	-17.1	1.82 H	57	31.0	25.9
8	17865.00	44.4 AV	54.0	-9.6	1.82 H	57	18.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

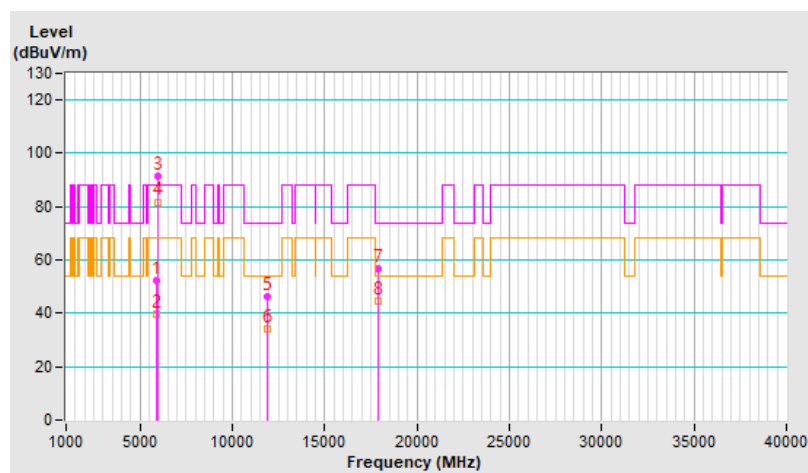


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.16 V	42	46.3	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.16 V	42	34.1	5.6
3	*5955.00	95.7 PK			1.16 V	42	90.2	5.5
4	*5955.00	84.6 AV			1.16 V	42	79.1	5.5
5	11910.00	45.8 PK	74.0	-28.2	1.59 V	5	31.2	14.6
6	11910.00	33.9 AV	54.0	-20.1	1.59 V	5	19.3	14.6
7	17865.00	56.3 PK	74.0	-17.7	1.85 V	41	30.4	25.9
8	17865.00	44.1 AV	54.0	-9.9	1.85 V	41	18.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

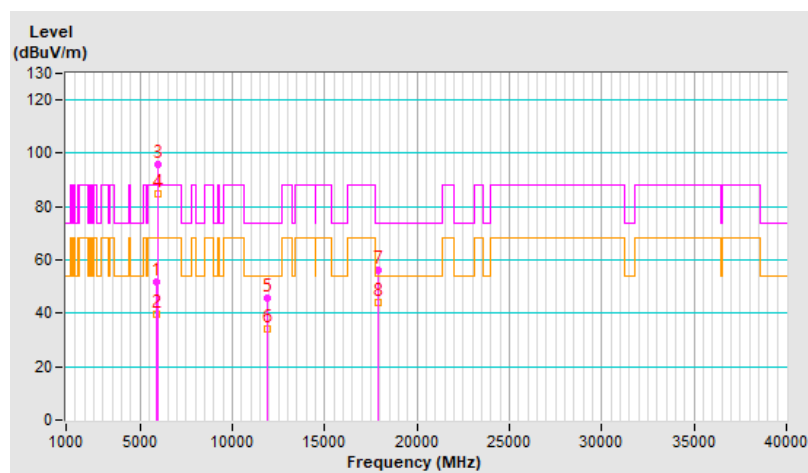


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	91.9 PK			1.18 H	156	86.1	5.8
2	*6195.00	82.2 AV			1.18 H	156	76.4	5.8
3	12390.00	46.4 PK	74.0	-27.6	1.66 H	0	31.7	14.7
4	12390.00	34.6 AV	54.0	-19.4	1.66 H	0	19.9	14.7
5	18585.00	56.6 PK	74.0	-17.4	1.82 H	33	62.1	-5.5
6	18585.00	43.8 AV	54.0	-10.2	1.82 H	33	49.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

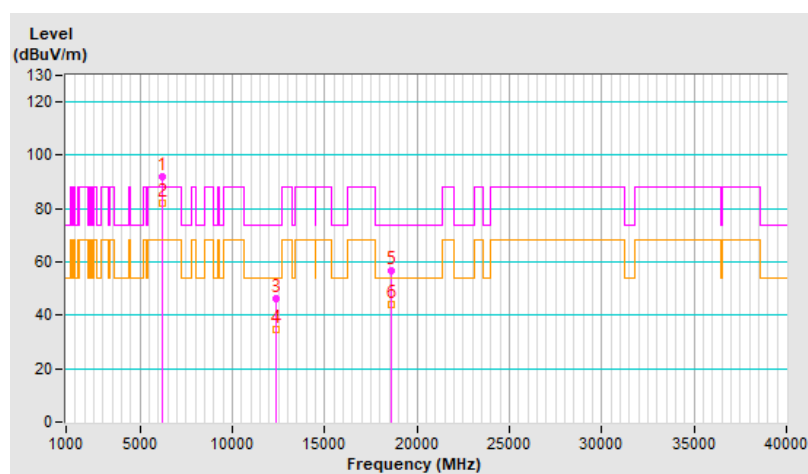


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.9 PK			1.20 V	43	90.1	5.8
2	*6195.00	84.6 AV			1.20 V	43	78.8	5.8
3	12390.00	45.2 PK	74.0	-28.8	1.61 V	10	30.5	14.7
4	12390.00	33.7 AV	54.0	-20.3	1.61 V	10	19.0	14.7
5	18585.00	55.6 PK	74.0	-18.4	1.79 V	58	61.1	-5.5
6	18585.00	43.5 AV	54.0	-10.5	1.79 V	58	49.0	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

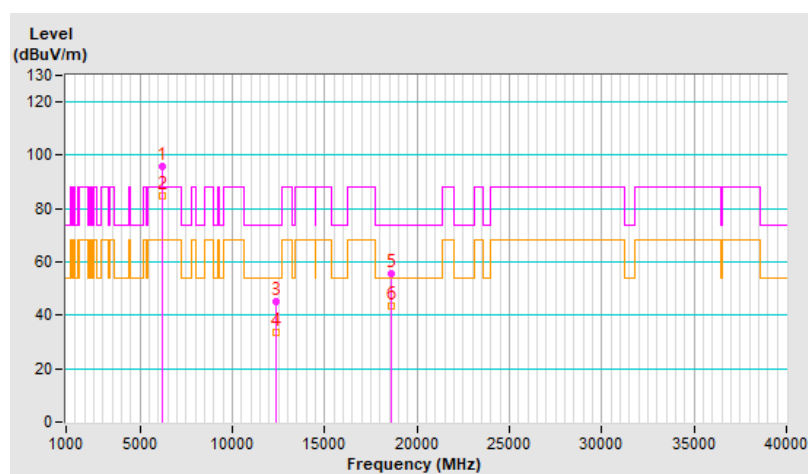


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.9 PK			1.15 H	170	85.1	6.8
2	*6415.00	82.2 AV			1.15 H	170	75.4	6.8
3	#12830.00	46.1 PK	88.2	-42.1	1.62 H	1	31.0	15.1
4	#12830.00	34.2 AV	68.2	-34.0	1.62 H	1	19.1	15.1
5	19245.00	56.3 PK	74.0	-17.7	1.82 H	35	60.9	-4.6
6	19245.00	43.6 AV	54.0	-10.4	1.82 H	35	48.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

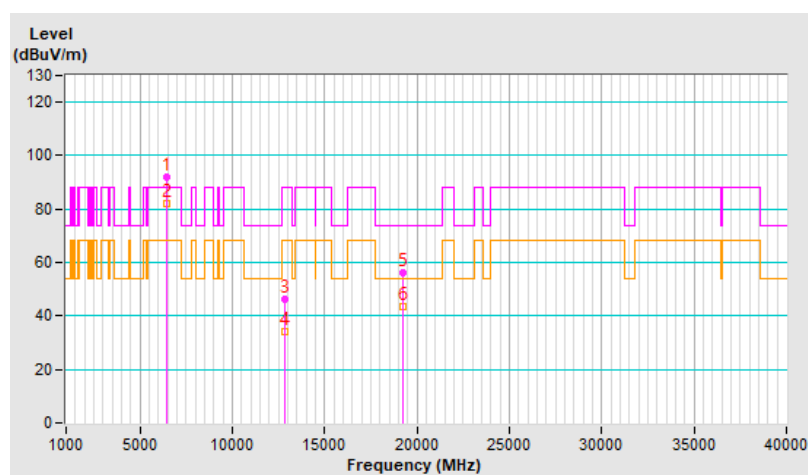


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.7 PK			1.10 V	31	88.9	6.8
2	*6415.00	84.5 AV			1.10 V	31	77.7	6.8
3	#12830.00	46.0 PK	88.2	-42.2	1.56 V	22	30.9	15.1
4	#12830.00	34.0 AV	68.2	-34.2	1.56 V	22	18.9	15.1
5	19245.00	55.8 PK	74.0	-18.2	1.76 V	45	60.4	-4.6
6	19245.00	43.4 AV	54.0	-10.6	1.76 V	45	48.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

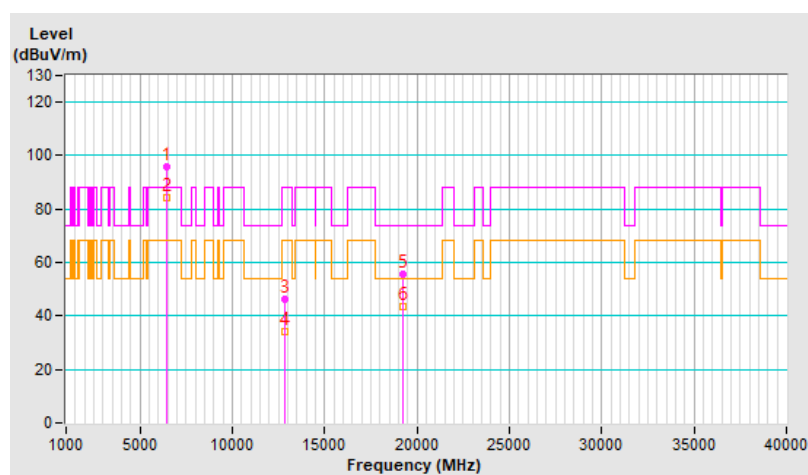


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.5 PK			1.09 H	170	84.1	7.4
2	*6535.00	81.8 AV			1.09 H	170	74.4	7.4
3	#13070.00	45.7 PK	88.2	-42.5	1.70 H	20	30.6	15.1
4	#13070.00	34.0 AV	68.2	-34.2	1.70 H	20	18.9	15.1
5	19605.00	56.4 PK	74.0	-17.6	1.71 H	41	61.2	-4.8
6	19605.00	44.1 AV	54.0	-9.9	1.71 H	41	48.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

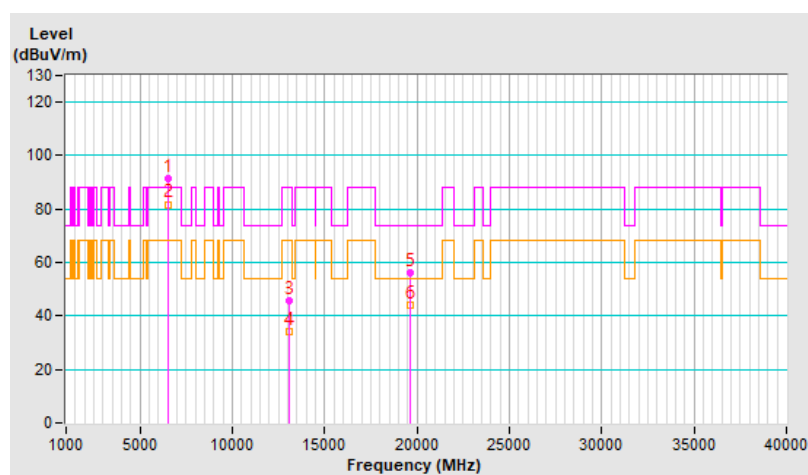


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.6 PK			1.15 V	37	88.2	7.4
2	*6535.00	84.4 AV			1.15 V	37	77.0	7.4
3	#13070.00	45.7 PK	88.2	-42.5	1.56 V	3	30.6	15.1
4	#13070.00	33.8 AV	68.2	-34.4	1.56 V	3	18.7	15.1
5	19605.00	56.1 PK	74.0	-17.9	1.80 V	54	60.9	-4.8
6	19605.00	43.6 AV	54.0	-10.4	1.80 V	54	48.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

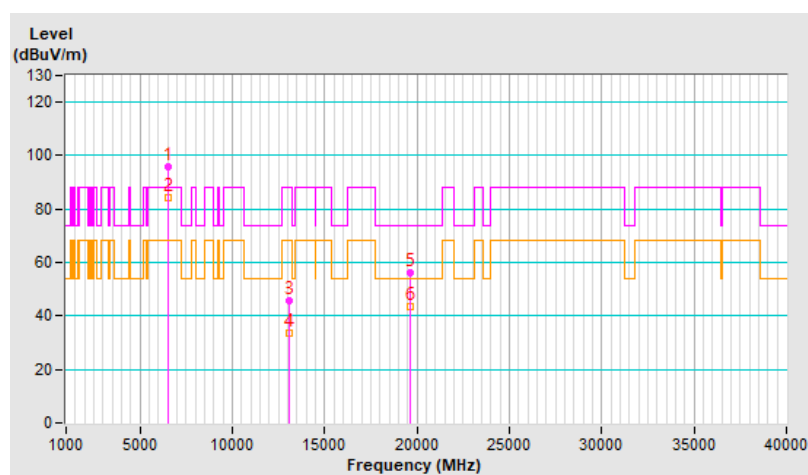


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	91.7 PK			1.18 H	167	84.0	7.7
2	*6695.00	82.1 AV			1.18 H	167	74.4	7.7
3	13390.00	45.5 PK	74.0	-28.5	1.63 H	9	30.1	15.4
4	13390.00	33.9 AV	54.0	-20.1	1.63 H	9	18.5	15.4
5	20085.00	55.9 PK	74.0	-18.1	1.73 H	43	60.2	-4.3
6	20085.00	43.7 AV	54.0	-10.3	1.73 H	43	48.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

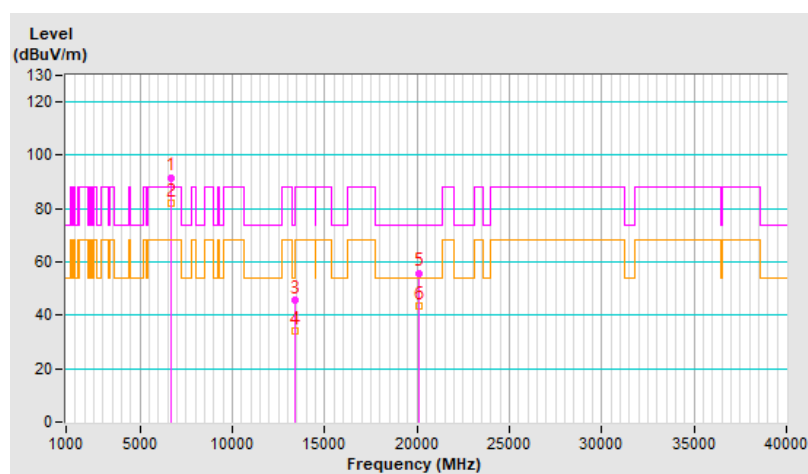


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.5 PK			1.15 V	32	87.8	7.7
2	*6695.00	84.4 AV			1.15 V	32	76.7	7.7
3	13390.00	45.8 PK	74.0	-28.2	1.58 V	12	30.4	15.4
4	13390.00	34.0 AV	54.0	-20.0	1.58 V	12	18.6	15.4
5	20085.00	56.3 PK	74.0	-17.7	1.77 V	44	60.6	-4.3
6	20085.00	43.9 AV	54.0	-10.1	1.77 V	44	48.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

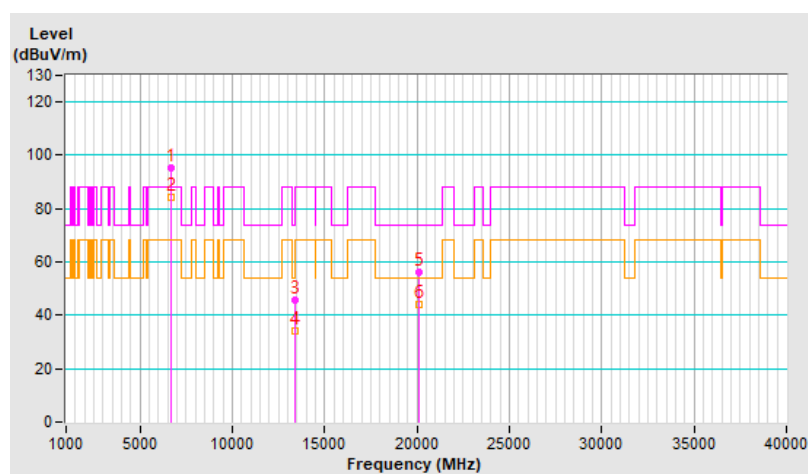


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.7 PK			2.34 H	204	87.5	8.2
2	*6855.00	86.2 AV			2.34 H	204	78.0	8.2
3	#13710.00	46.4 PK	88.2	-41.8	1.65 H	14	30.1	16.3
4	#13710.00	34.2 AV	68.2	-34.0	1.65 H	14	17.9	16.3
5	20565.00	56.4 PK	74.0	-17.6	1.82 H	54	60.1	-3.7
6	20565.00	44.2 AV	54.0	-9.8	1.82 H	54	47.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

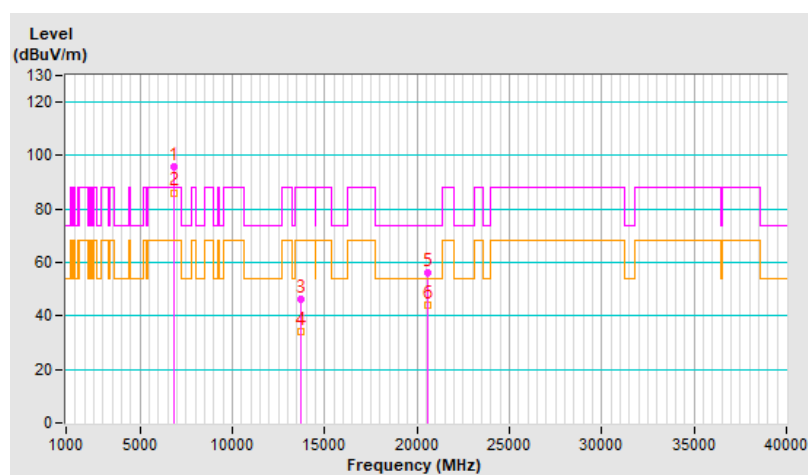


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.2 PK			1.83 V	325	83.0	8.2
2	*6855.00	80.7 AV			1.83 V	325	72.5	8.2
3	#13710.00	45.5 PK	88.2	-42.7	1.59 V	13	29.2	16.3
4	#13710.00	33.9 AV	68.2	-34.3	1.59 V	13	17.6	16.3
5	20565.00	56.6 PK	74.0	-17.4	1.85 V	34	60.3	-3.7
6	20565.00	44.2 AV	54.0	-9.8	1.85 V	34	47.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

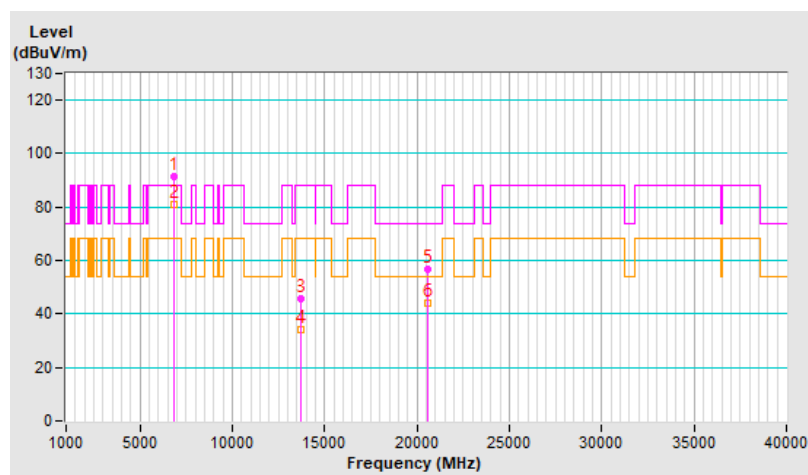


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.3 PK	88.2	-35.9	1.00 H	164	46.7	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.00 H	164	33.9	5.6
3	*5955.00	92.5 PK			1.00 H	164	87.0	5.5
4	*5955.00	81.9 AV			1.00 H	164	76.4	5.5
5	11910.00	46.0 PK	74.0	-28.0	1.63 H	0	31.4	14.6
6	11910.00	34.3 AV	54.0	-19.7	1.63 H	0	19.7	14.6
7	17865.00	56.7 PK	74.0	-17.3	1.82 H	44	30.8	25.9
8	17865.00	44.0 AV	54.0	-10.0	1.82 H	44	18.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

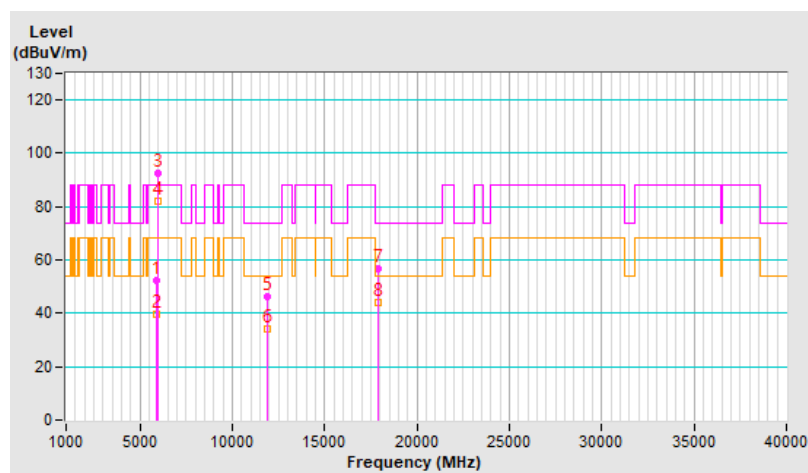


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.00 V	49	45.8	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.00 V	49	34.0	5.6
3	*5955.00	95.6 PK			1.00 V	49	90.1	5.5
4	*5955.00	85.4 AV			1.00 V	49	79.9	5.5
5	11910.00	44.8 PK	74.0	-29.2	1.68 V	2	30.2	14.6
6	11910.00	33.4 AV	54.0	-20.6	1.68 V	2	18.8	14.6
7	17865.00	56.4 PK	74.0	-17.6	1.80 V	47	30.5	25.9
8	17865.00	44.2 AV	54.0	-9.8	1.80 V	47	18.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

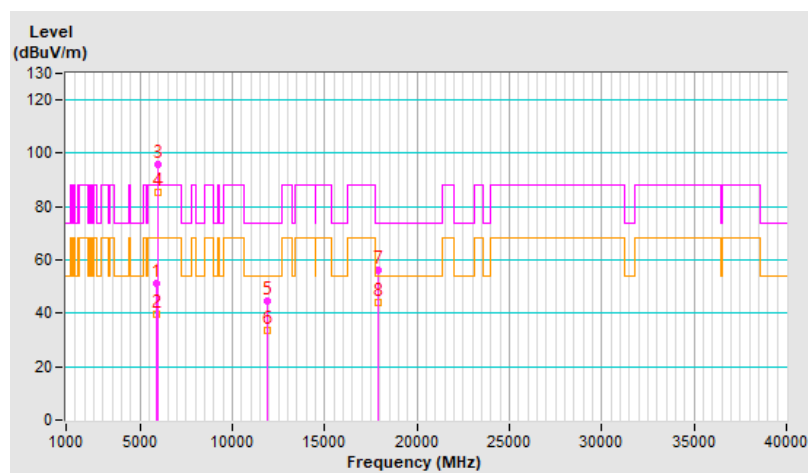


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	92.4 PK			1.00 H	158	86.6	5.8
2	*6195.00	81.6 AV			1.00 H	158	75.8	5.8
3	12390.00	46.3 PK	74.0	-27.7	1.62 H	0	31.6	14.7
4	12390.00	34.2 AV	54.0	-19.8	1.62 H	0	19.5	14.7
5	18585.00	56.4 PK	74.0	-17.6	1.83 H	48	61.9	-5.5
6	18585.00	43.7 AV	54.0	-10.3	1.83 H	48	49.2	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

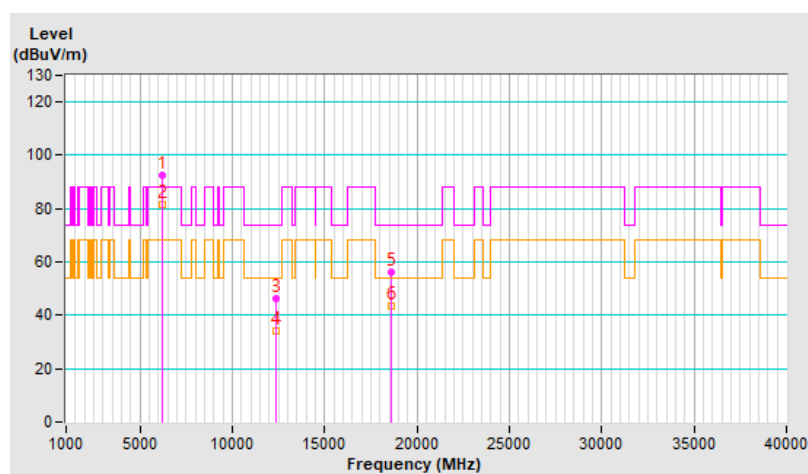


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.3 PK			1.04 V	37	89.5	5.8
2	*6195.00	85.3 AV			1.04 V	37	79.5	5.8
3	12390.00	45.4 PK	74.0	-28.6	1.62 V	17	30.7	14.7
4	12390.00	33.5 AV	54.0	-20.5	1.62 V	17	18.8	14.7
5	18585.00	55.6 PK	74.0	-18.4	1.76 V	48	61.1	-5.5
6	18585.00	43.5 AV	54.0	-10.5	1.76 V	48	49.0	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

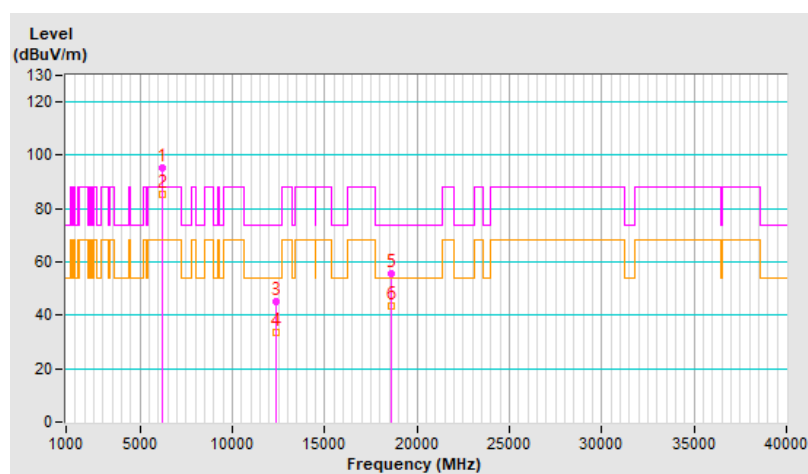


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.1 PK			1.00 H	163	85.3	6.8
2	*6415.00	81.8 AV			1.00 H	163	75.0	6.8
3	#12830.00	46.1 PK	88.2	-42.1	1.62 H	0	31.0	15.1
4	#12830.00	34.0 AV	68.2	-34.2	1.62 H	0	18.9	15.1
5	19245.00	56.1 PK	74.0	-17.9	1.71 H	39	60.7	-4.6
6	19245.00	43.9 AV	54.0	-10.1	1.71 H	39	48.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

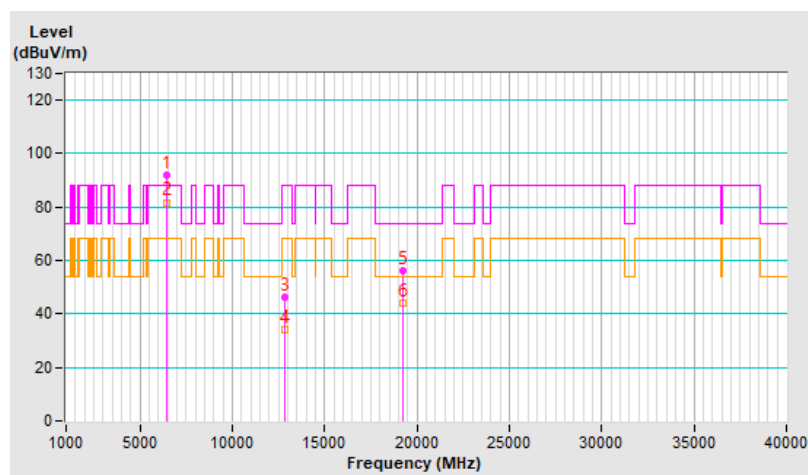


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.3 PK			1.05 V	60	89.5	6.8
2	*6415.00	85.8 AV			1.05 V	60	79.0	6.8
3	#12830.00	45.3 PK	88.2	-42.9	1.67 V	27	30.2	15.1
4	#12830.00	33.5 AV	68.2	-34.7	1.67 V	27	18.4	15.1
5	19245.00	56.1 PK	74.0	-17.9	1.74 V	52	60.7	-4.6
6	19245.00	43.9 AV	54.0	-10.1	1.74 V	52	48.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

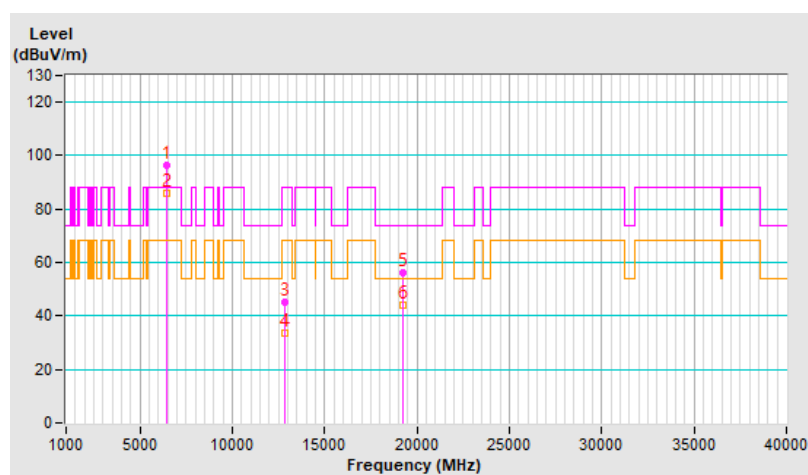


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.3 PK			1.04 H	179	84.9	7.4
2	*6535.00	81.4 AV			1.04 H	179	74.0	7.4
3	#13070.00	45.6 PK	88.2	-42.6	1.66 H	0	30.5	15.1
4	#13070.00	33.9 AV	68.2	-34.3	1.66 H	0	18.8	15.1
5	19605.00	56.3 PK	74.0	-17.7	1.78 H	45	61.1	-4.8
6	19605.00	44.0 AV	54.0	-10.0	1.78 H	45	48.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

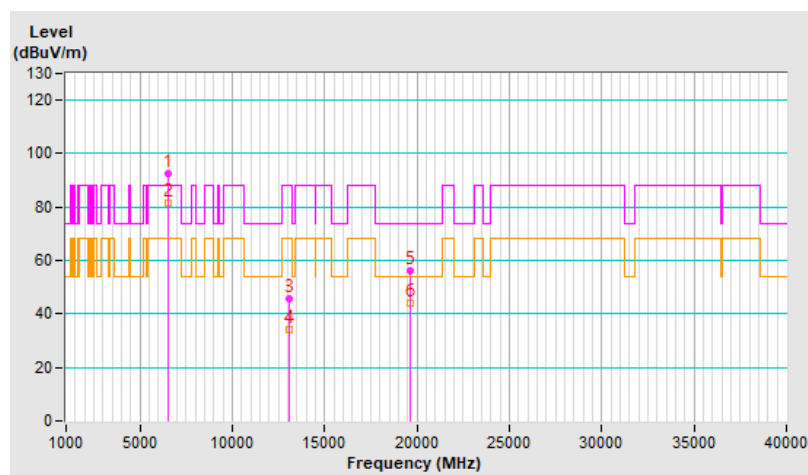


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.5 PK			1.05 V	58	88.1	7.4
2	*6535.00	85.3 AV			1.05 V	58	77.9	7.4
3	#13070.00	46.3 PK	88.2	-41.9	1.62 V	4	31.2	15.1
4	#13070.00	34.3 AV	68.2	-33.9	1.62 V	4	19.2	15.1
5	19605.00	56.2 PK	74.0	-17.8	1.76 V	54	61.0	-4.8
6	19605.00	43.8 AV	54.0	-10.2	1.76 V	54	48.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

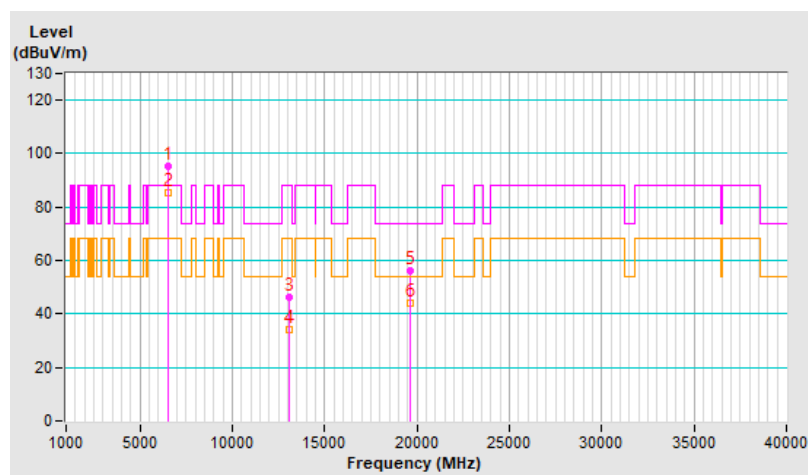


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.1 PK			1.00 H	164	84.4	7.7
2	*6695.00	81.6 AV			1.00 H	164	73.9	7.7
3	13390.00	45.6 PK	74.0	-28.4	1.62 H	15	30.2	15.4
4	13390.00	33.9 AV	54.0	-20.1	1.62 H	15	18.5	15.4
5	20085.00	56.7 PK	74.0	-17.3	1.79 H	60	61.0	-4.3
6	20085.00	44.4 AV	54.0	-9.6	1.79 H	60	48.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

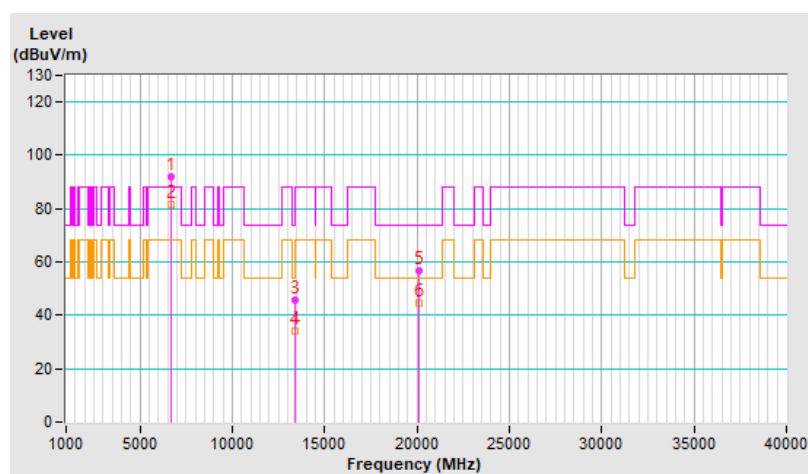


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.5 PK			1.03 V	38	88.4	7.1
2	*6695.00	85.1 AV			1.03 V	38	78.0	7.1
3	13390.00	45.4 PK	74.0	-28.6	1.60 V	27	30.0	15.4
4	13390.00	33.6 AV	54.0	-20.4	1.60 V	27	18.2	15.4
5	20085.00	55.7 PK	74.0	-18.3	1.84 V	35	55.7	0.0
6	20085.00	43.7 AV	54.0	-10.3	1.84 V	35	43.7	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

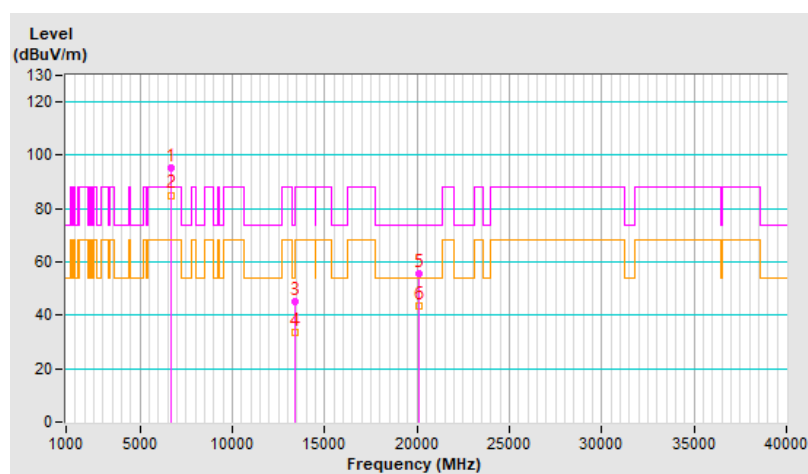


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	93.7 PK			2.36 H	195	85.5	8.2
2	*6855.00	83.5 AV			2.36 H	195	75.3	8.2
3	#13710.00	46.2 PK	88.2	-42.0	1.70 H	3	29.9	16.3
4	#13710.00	34.3 AV	68.2	-33.9	1.70 H	3	18.0	16.3
5	20565.00	56.5 PK	74.0	-17.5	1.83 H	41	60.2	-3.7
6	20565.00	43.8 AV	54.0	-10.2	1.83 H	41	47.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

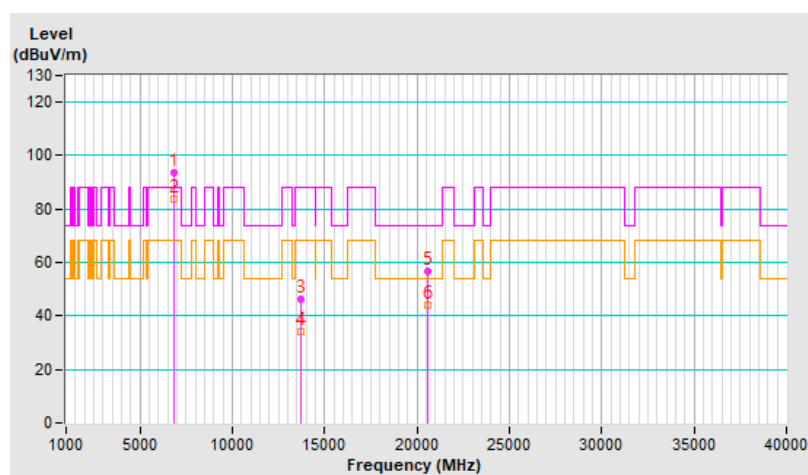


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	89.7 PK			2.05 V	18	81.5	8.2
2	*6855.00	79.3 AV			2.05 V	18	71.1	8.2
3	#13710.00	45.9 PK	88.2	-42.3	1.58 V	26	29.6	16.3
4	#13710.00	34.1 AV	68.2	-34.1	1.58 V	26	17.8	16.3
5	20565.00	55.6 PK	74.0	-18.4	1.80 V	45	59.3	-3.7
6	20565.00	43.3 AV	54.0	-10.7	1.80 V	45	47.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

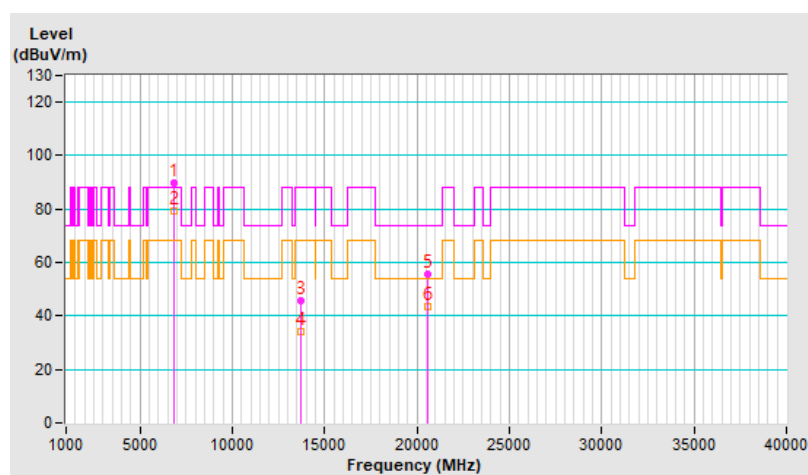


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.06 H	172	45.6	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.06 H	172	34.1	5.6
3	*5955.00	92.6 PK			1.06 H	172	87.1	5.5
4	*5955.00	81.4 AV			1.06 H	172	75.9	5.5
5	11910.00	46.1 PK	74.0	-27.9	1.70 H	18	31.5	14.6
6	11910.00	34.2 AV	54.0	-19.8	1.70 H	18	19.6	14.6
7	17865.00	56.8 PK	74.0	-17.2	1.81 H	42	30.9	25.9
8	17865.00	44.3 AV	54.0	-9.7	1.81 H	42	18.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

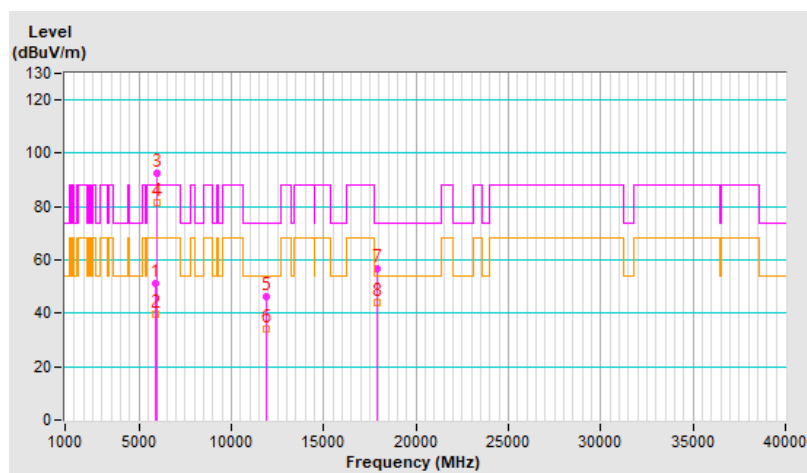


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.01 V	45	45.2	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.01 V	45	34.0	5.6
3	*5955.00	94.7 PK			1.01 V	45	89.2	5.5
4	*5955.00	84.8 AV			1.01 V	45	79.3	5.5
5	11910.00	45.5 PK	74.0	-28.5	1.64 V	25	30.9	14.6
6	11910.00	34.0 AV	54.0	-20.0	1.64 V	25	19.4	14.6
7	17865.00	55.8 PK	74.0	-18.2	1.82 V	65	29.9	25.9
8	17865.00	43.5 AV	54.0	-10.5	1.82 V	65	17.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

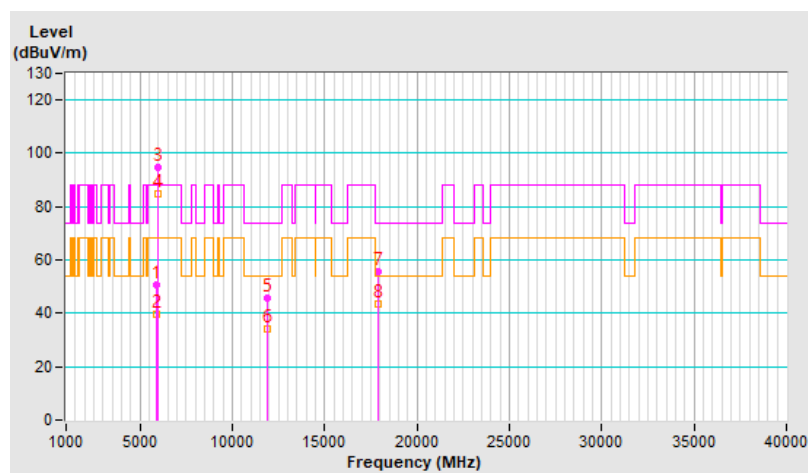


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.8 PK			1.02 H	185	86.0	6.8
2	*6415.00	81.7 AV			1.02 H	185	74.9	6.8
3	#12830.00	45.7 PK	88.2	-42.5	1.63 H	12	30.6	15.1
4	#12830.00	33.9 AV	68.2	-34.3	1.63 H	12	18.8	15.1
5	19245.00	56.9 PK	74.0	-17.1	1.83 H	44	61.5	-4.6
6	19245.00	44.2 AV	54.0	-9.8	1.83 H	44	48.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

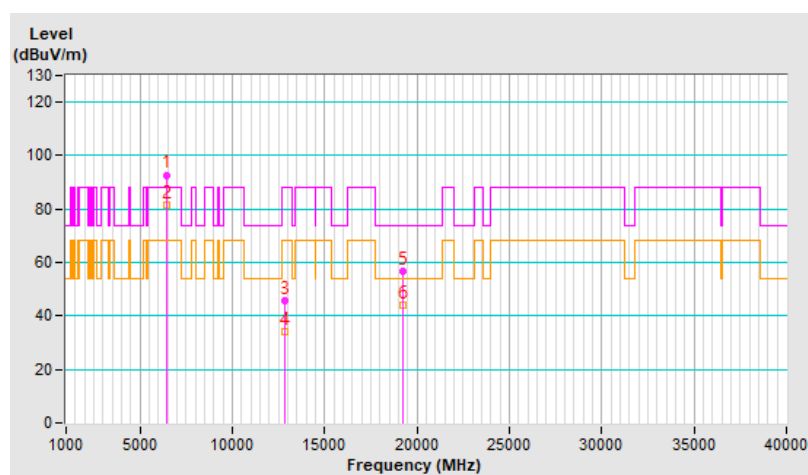


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	94.6 PK			1.00 V	57	87.8	6.8
2	*6415.00	84.6 AV			1.00 V	57	77.8	6.8
3	#12830.00	45.4 PK	88.2	-42.8	1.59 V	23	30.3	15.1
4	#12830.00	33.4 AV	68.2	-34.8	1.59 V	23	18.3	15.1
5	19245.00	55.9 PK	74.0	-18.1	1.82 V	50	60.5	-4.6
6	19245.00	43.8 AV	54.0	-10.2	1.82 V	50	48.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

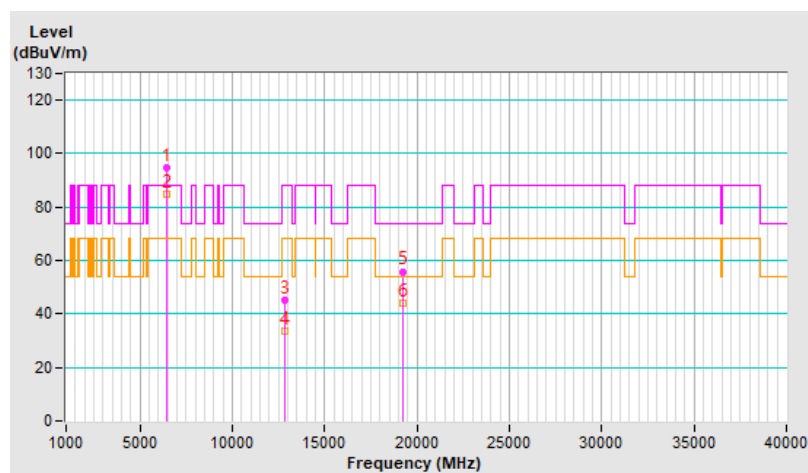


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.4 PK			1.05 H	166	85.0	7.4
2	*6535.00	81.4 AV			1.05 H	166	74.0	7.4
3	#13070.00	46.2 PK	88.2	-42.0	1.68 H	20	31.1	15.1
4	#13070.00	34.3 AV	68.2	-33.9	1.68 H	20	19.2	15.1
5	19605.00	57.0 PK	74.0	-17.0	1.78 H	30	61.8	-4.8
6	19605.00	44.3 AV	54.0	-9.7	1.78 H	30	49.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

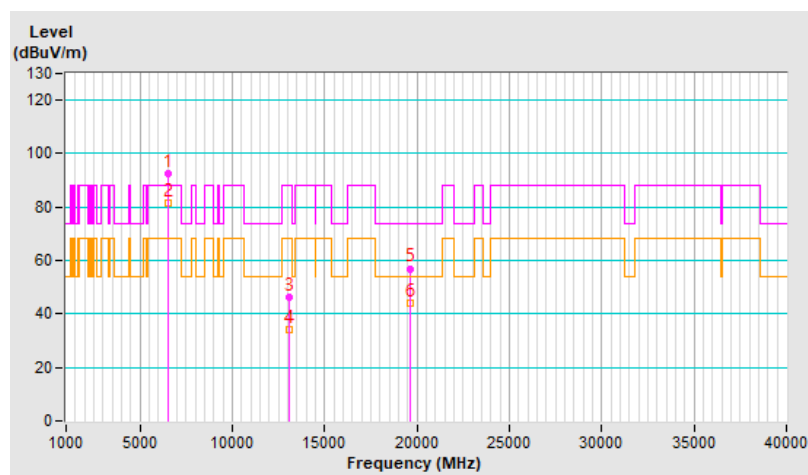


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	94.4 PK			1.00 V	51	87.0	7.4
2	*6535.00	84.5 AV			1.00 V	51	77.1	7.4
3	#13070.00	46.3 PK	88.2	-41.9	1.59 V	17	31.2	15.1
4	#13070.00	34.3 AV	68.2	-33.9	1.59 V	17	19.2	15.1
5	19605.00	55.9 PK	74.0	-18.1	1.80 V	59	60.7	-4.8
6	19605.00	43.6 AV	54.0	-10.4	1.80 V	59	48.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

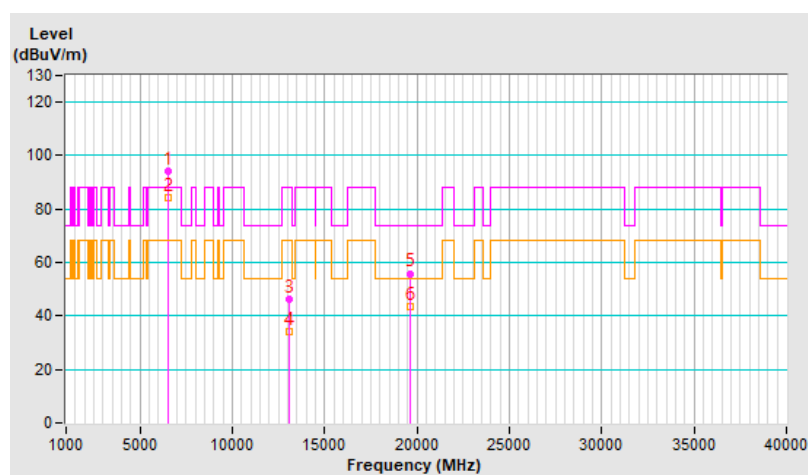


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.4 PK			2.17 H	199	87.2	8.2
2	*6855.00	84.0 AV			2.17 H	199	75.8	8.2
3	#13710.00	46.0 PK	88.2	-42.2	1.66 H	11	29.7	16.3
4	#13710.00	33.8 AV	68.2	-34.4	1.66 H	11	17.5	16.3
5	20565.00	56.6 PK	74.0	-17.4	1.83 H	45	60.3	-3.7
6	20565.00	44.3 AV	54.0	-9.7	1.83 H	45	48.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

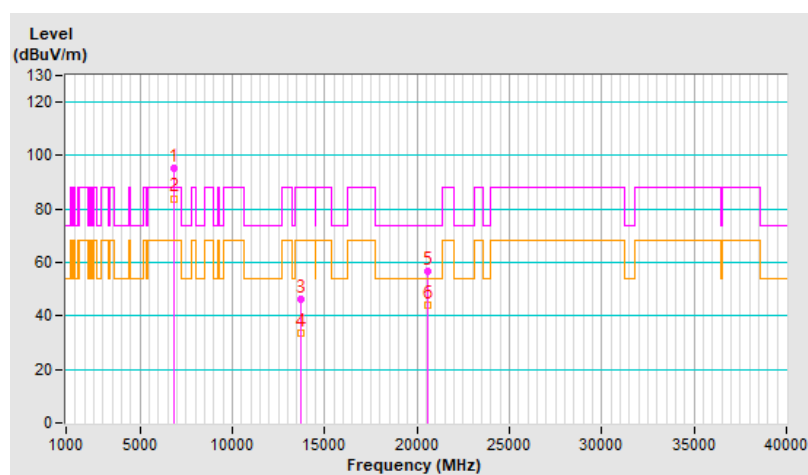


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	90.1 PK			2.02 V	337	81.9	8.2
2	*6855.00	80.7 AV			2.02 V	337	72.5	8.2
3	#13710.00	45.5 PK	88.2	-42.7	1.65 V	8	29.2	16.3
4	#13710.00	33.7 AV	68.2	-34.5	1.65 V	8	17.4	16.3
5	20565.00	56.1 PK	74.0	-17.9	1.76 V	52	59.8	-3.7
6	20565.00	43.8 AV	54.0	-10.2	1.76 V	52	47.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

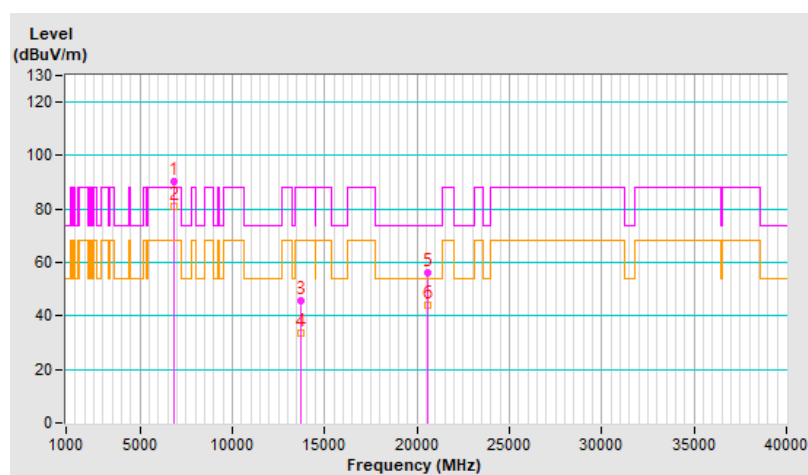


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	1.13 H	164	46.4	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.13 H	164	34.0	5.6
3	*5955.00	91.9 PK			1.13 H	164	86.4	5.5
4	*5955.00	81.5 AV			1.13 H	164	76.0	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.68 H	12	31.6	14.6
6	11910.00	34.5 AV	54.0	-19.5	1.68 H	12	19.9	14.6
7	17865.00	55.8 PK	74.0	-18.2	1.78 H	31	29.9	25.9
8	17865.00	43.6 AV	54.0	-10.4	1.78 H	31	17.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

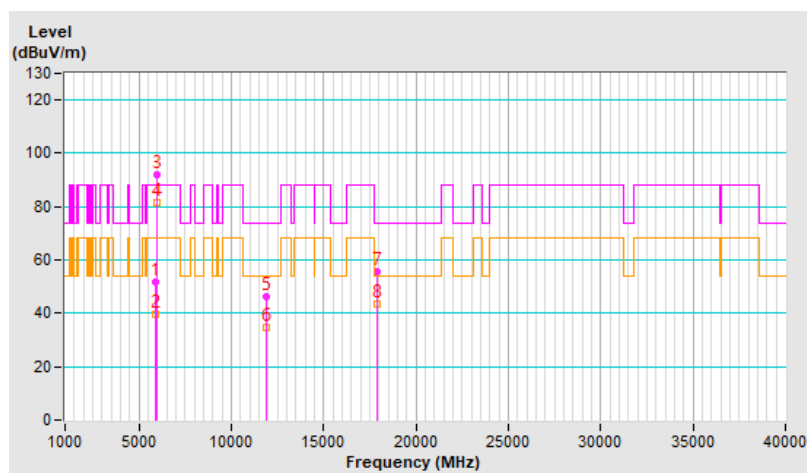


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	1.12 V	52	46.4	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.12 V	52	34.2	5.6
3	*5955.00	97.0 PK			1.12 V	52	91.5	5.5
4	*5955.00	85.8 AV			1.12 V	52	80.3	5.5
5	11910.00	45.4 PK	74.0	-28.6	1.65 V	0	30.8	14.6
6	11910.00	33.6 AV	54.0	-20.4	1.65 V	0	19.0	14.6
7	17865.00	56.6 PK	74.0	-17.4	1.86 V	55	30.7	25.9
8	17865.00	44.3 AV	54.0	-9.7	1.86 V	55	18.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

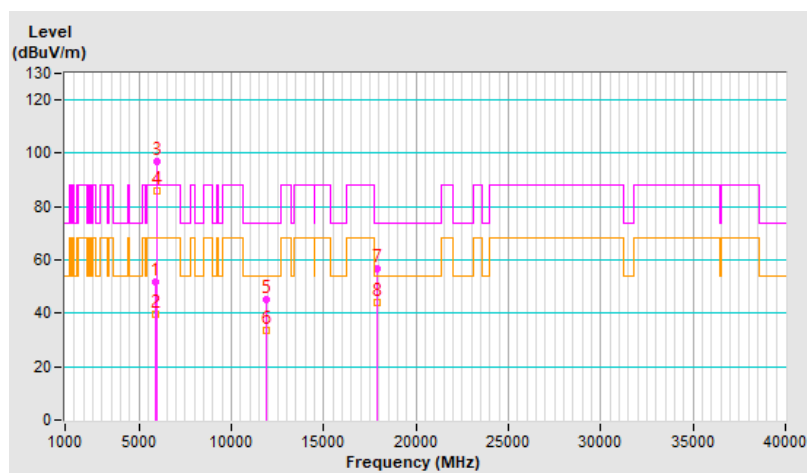


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.9 PK			1.11 H	155	85.1	6.8
2	*6415.00	81.4 AV			1.11 H	155	74.6	6.8
3	#12830.00	46.1 PK	88.2	-42.1	1.61 H	2	31.0	15.1
4	#12830.00	34.3 AV	68.2	-33.9	1.61 H	2	19.2	15.1
5	19245.00	56.8 PK	74.0	-17.2	1.72 H	37	61.4	-4.6
6	19245.00	44.2 AV	54.0	-9.8	1.72 H	37	48.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

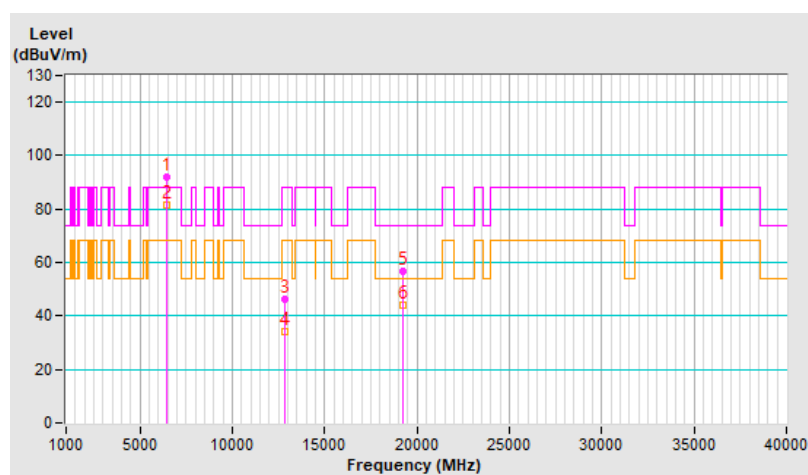


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.9 PK			1.10 V	52	90.1	6.8
2	*6415.00	85.6 AV			1.10 V	52	78.8	6.8
3	#12830.00	45.2 PK	88.2	-43.0	1.65 V	16	30.1	15.1
4	#12830.00	33.7 AV	68.2	-34.5	1.65 V	16	18.6	15.1
5	19245.00	56.4 PK	74.0	-17.6	1.78 V	62	61.0	-4.6
6	19245.00	44.1 AV	54.0	-9.9	1.78 V	62	48.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

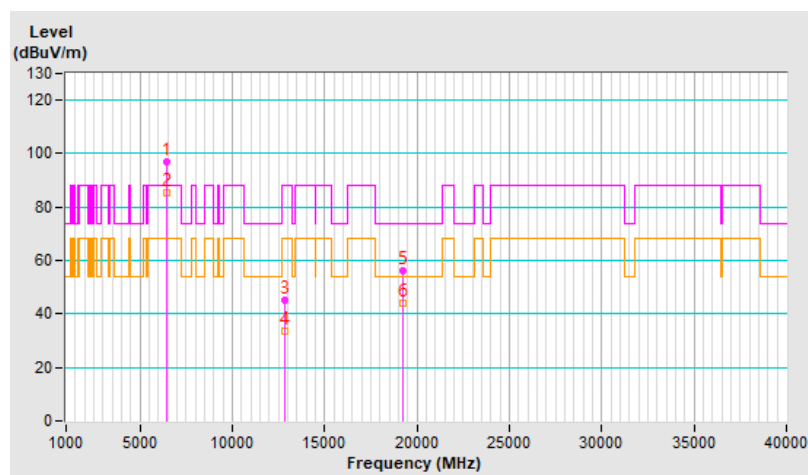


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	92.1 PK			1.17 H	161	84.7	7.4
2	*6535.00	81.9 AV			1.17 H	161	74.5	7.4
3	#13070.00	46.2 PK	88.2	-42.0	1.65 H	7	31.1	15.1
4	#13070.00	34.4 AV	68.2	-33.8	1.65 H	7	19.3	15.1
5	19605.00	57.2 PK	74.0	-16.8	1.72 H	30	62.0	-4.8
6	19605.00	44.4 AV	54.0	-9.6	1.72 H	30	49.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

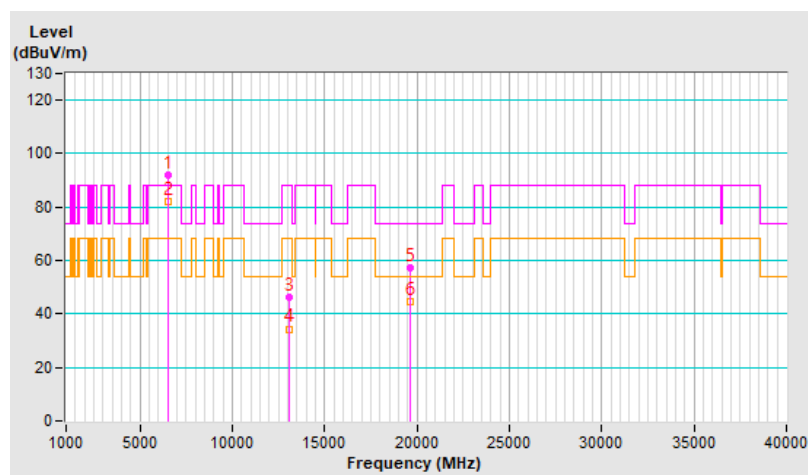


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.9 PK			1.13 V	66	89.5	7.4
2	*6535.00	85.4 AV			1.13 V	66	78.0	7.4
3	#13070.00	45.3 PK	88.2	-42.9	1.61 V	19	30.2	15.1
4	#13070.00	33.8 AV	68.2	-34.4	1.61 V	19	18.7	15.1
5	19605.00	56.5 PK	74.0	-17.5	1.82 V	64	61.3	-4.8
6	19605.00	44.3 AV	54.0	-9.7	1.82 V	64	49.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

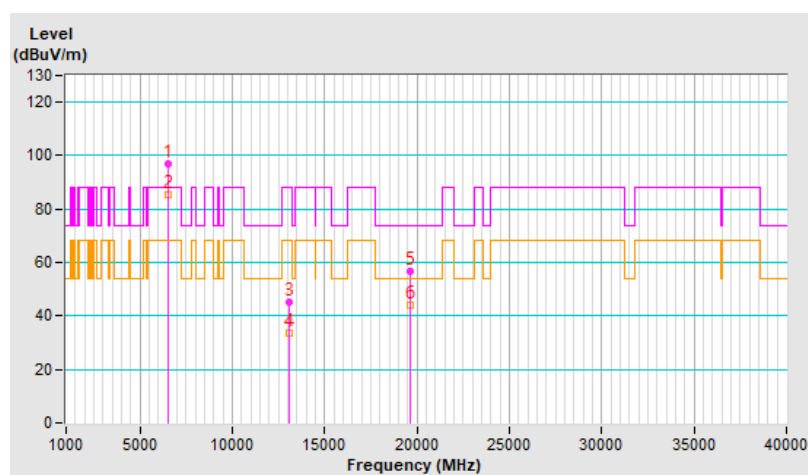


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.2 PK			2.36 H	200	87.0	8.2
2	*6855.00	84.3 AV			2.36 H	200	76.1	8.2
3	#13710.00	46.3 PK	88.2	-41.9	1.60 H	7	30.0	16.3
4	#13710.00	34.3 AV	68.2	-33.9	1.60 H	7	18.0	16.3
5	20565.00	56.8 PK	74.0	-17.2	1.82 H	52	60.5	-3.7
6	20565.00	44.4 AV	54.0	-9.6	1.82 H	52	48.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

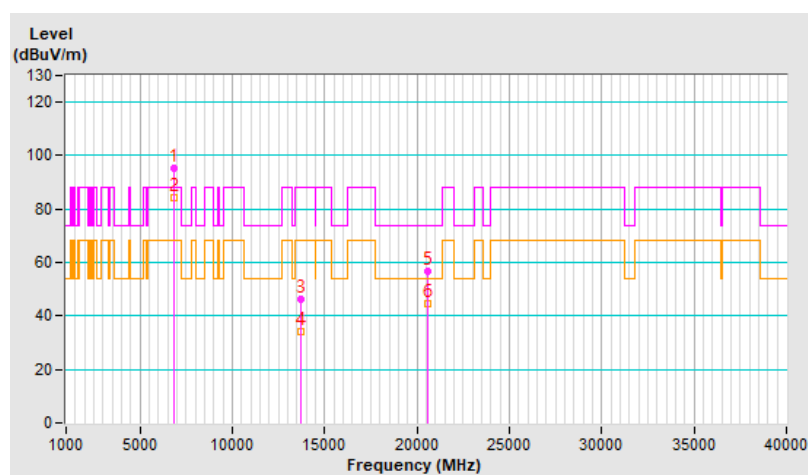


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	90.3 PK			1.50 V	351	82.1	8.2
2	*6855.00	78.9 AV			1.50 V	351	70.7	8.2
3	#13710.00	45.4 PK	88.2	-42.8	1.61 V	16	29.1	16.3
4	#13710.00	33.8 AV	68.2	-34.4	1.61 V	16	17.5	16.3
5	20565.00	56.1 PK	74.0	-17.9	1.79 V	43	59.8	-3.7
6	20565.00	43.7 AV	54.0	-10.3	1.79 V	43	47.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

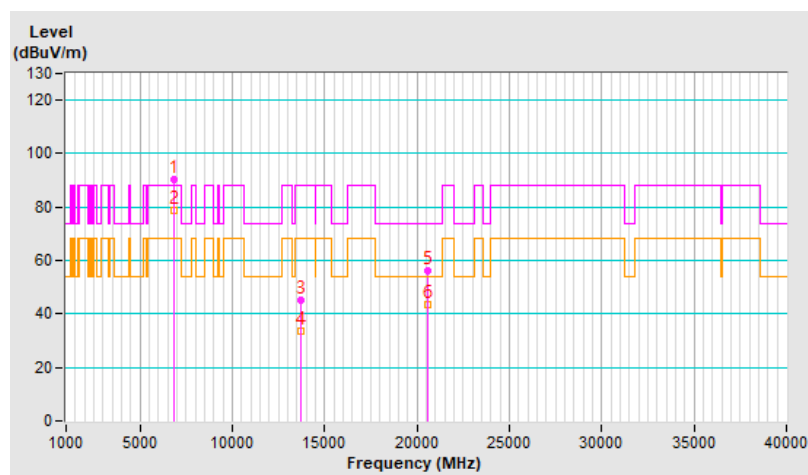


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.00 H	163	46.1	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.00 H	163	34.2	5.6
3	*5985.00	92.9 PK			1.00 H	163	87.4	5.5
4	*5985.00	81.6 AV			1.00 H	163	76.1	5.5
5	11970.00	46.5 PK	74.0	-27.5	1.69 H	9	32.0	14.5
6	11970.00	34.4 AV	54.0	-19.6	1.69 H	9	19.9	14.5
7	17955.00	56.4 PK	74.0	-17.6	1.77 H	32	28.1	28.3
8	17955.00	43.7 AV	54.0	-10.3	1.77 H	32	15.4	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

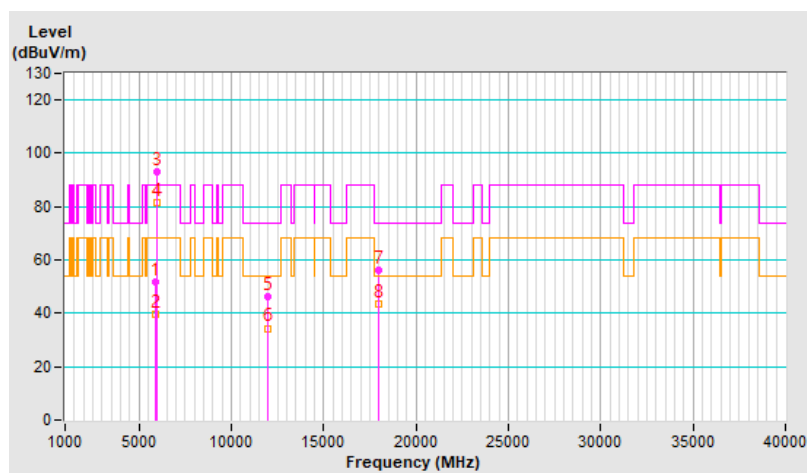


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.2 PK	88.2	-36.0	1.00 V	0	46.6	5.6
2	#5925.00	40.1 AV	68.2	-28.1	1.00 V	0	34.5	5.6
3	*5985.00	96.1 PK			1.08 V	55	90.6	5.5
4	*5985.00	85.4 AV			1.08 V	55	79.9	5.5
5	11970.00	45.9 PK	74.0	-28.1	1.63 V	12	31.4	14.5
6	11970.00	34.0 AV	54.0	-20.0	1.63 V	12	19.5	14.5
7	17955.00	56.3 PK	74.0	-17.7	1.79 V	41	28.0	28.3
8	17955.00	44.2 AV	54.0	-9.8	1.79 V	41	15.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

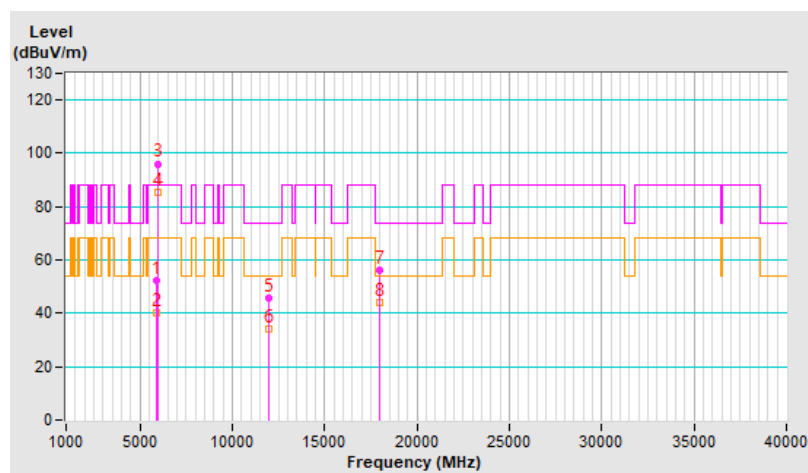


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	92.7 PK			1.00 H	148	86.1	6.6
2	*6385.00	81.7 AV			1.00 H	148	75.1	6.6
3	#12770.00	46.1 PK	88.2	-42.1	1.68 H	2	31.2	14.9
4	#12770.00	34.1 AV	68.2	-34.1	1.68 H	2	19.2	14.9
5	19155.00	55.9 PK	74.0	-18.1	1.78 H	32	60.6	-4.7
6	19155.00	43.6 AV	54.0	-10.4	1.78 H	32	48.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

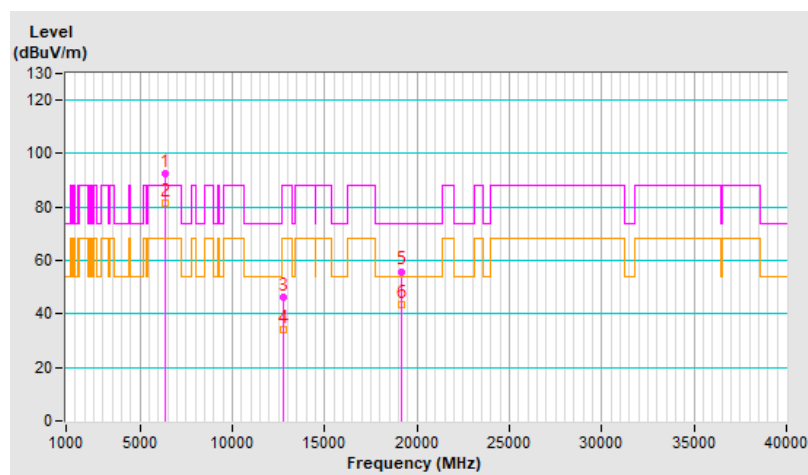


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	96.2 PK			1.10 V	54	89.6	6.6
2	*6385.00	85.7 AV			1.10 V	54	79.1	6.6
3	#12770.00	45.3 PK	88.2	-42.9	1.57 V	3	30.4	14.9
4	#12770.00	33.9 AV	68.2	-34.3	1.57 V	3	19.0	14.9
5	19155.00	55.5 PK	74.0	-18.5	1.78 V	46	60.2	-4.7
6	19155.00	43.3 AV	54.0	-10.7	1.78 V	46	48.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

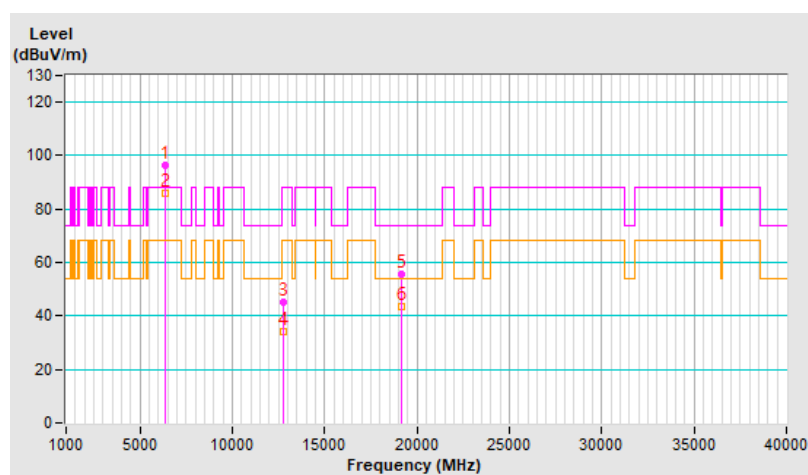


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	92.7 PK			1.00 H	160	84.9	7.8
2	*6625.00	81.6 AV			1.00 H	160	73.8	7.8
3	13250.00	46.2 PK	74.0	-27.8	1.63 H	1	30.8	15.4
4	13250.00	34.4 AV	54.0	-19.6	1.63 H	1	19.0	15.4
5	19875.00	56.1 PK	74.0	-17.9	1.83 H	48	60.6	-4.5
6	19875.00	43.9 AV	54.0	-10.1	1.83 H	48	48.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

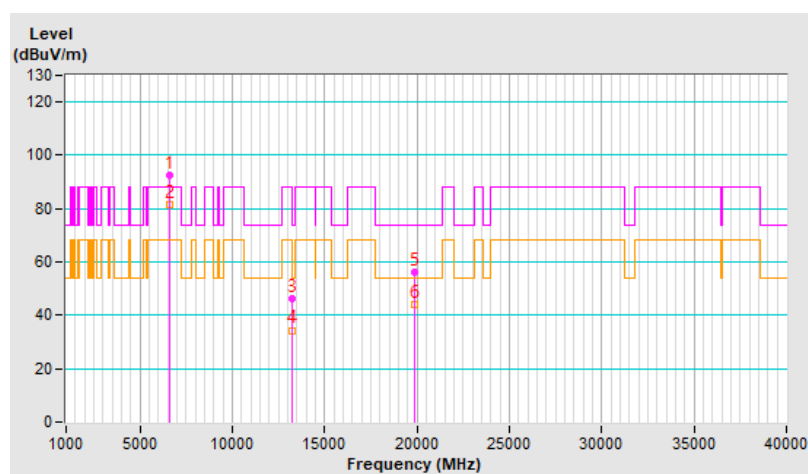


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	96.2 PK			1.03 V	61	88.4	7.8
2	*6625.00	85.2 AV			1.03 V	61	77.4	7.8
3	13250.00	46.0 PK	74.0	-28.0	1.61 V	2	30.6	15.4
4	13250.00	34.2 AV	54.0	-19.8	1.61 V	2	18.8	15.4
5	19875.00	55.5 PK	74.0	-18.5	1.74 V	42	60.0	-4.5
6	19875.00	43.4 AV	54.0	-10.6	1.74 V	42	47.9	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

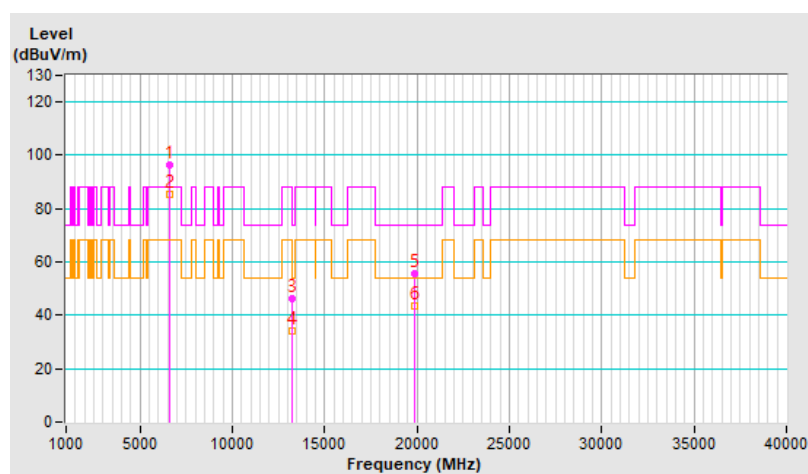


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	91.6 PK			1.00 H	9	83.9	7.7
2	*6785.00	80.2 AV			1.00 H	9	72.5	7.7
3	#13570.00	46.6 PK	88.2	-41.6	1.61 H	16	30.9	15.7
4	#13570.00	34.6 AV	68.2	-33.6	1.61 H	16	18.9	15.7
5	20355.00	57.2 PK	74.0	-16.8	1.80 H	53	61.0	-3.8
6	20355.00	44.4 AV	54.0	-9.6	1.80 H	53	48.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

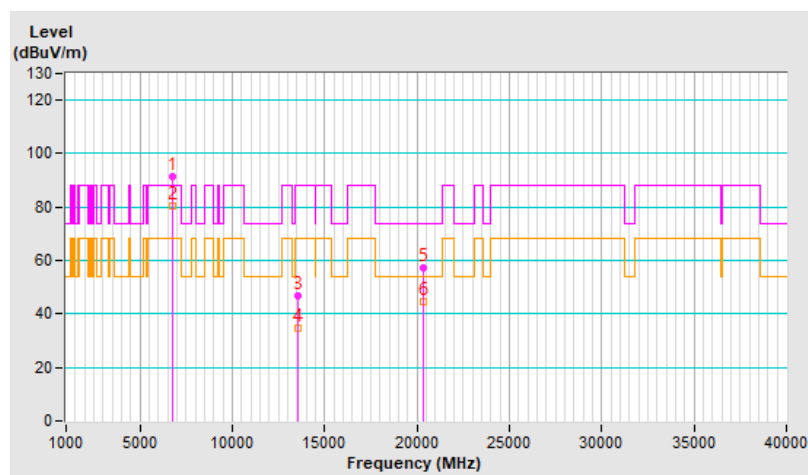


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	91.1 PK			1.51 V	352	83.4	7.7
2	*6785.00	79.7 AV			1.51 V	352	72.0	7.7
3	#13570.00	45.7 PK	88.2	-42.5	1.68 V	27	30.0	15.7
4	#13570.00	33.9 AV	68.2	-34.3	1.68 V	27	18.2	15.7
5	20355.00	56.5 PK	74.0	-17.5	1.80 V	55	60.3	-3.8
6	20355.00	44.0 AV	54.0	-10.0	1.80 V	55	47.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

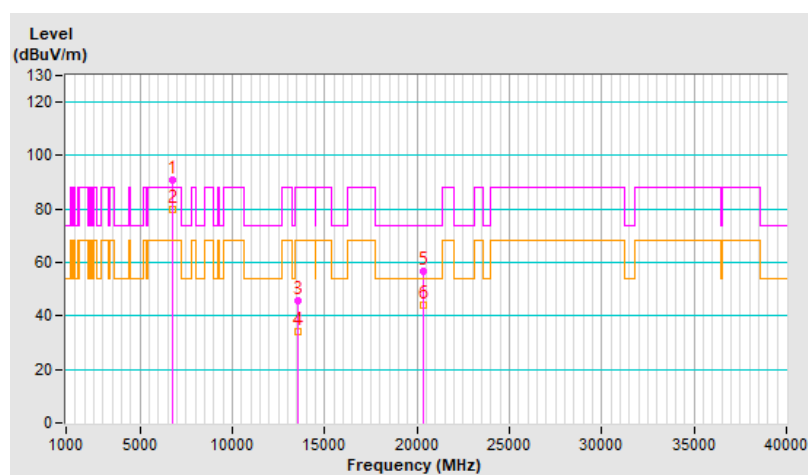


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	1.00 H	165	47.2	5.6
2	#5925.00	40.8 AV	68.2	-27.4	1.00 H	165	35.2	5.6
3	*6025.00	92.5 PK			1.00 H	165	86.9	5.6
4	*6025.00	81.6 AV			1.00 H	165	76.0	5.6
5	12050.00	46.1 PK	74.0	-27.9	1.70 H	19	31.5	14.6
6	12050.00	34.1 AV	54.0	-19.9	1.70 H	19	19.5	14.6
7	18075.00	57.0 PK	74.0	-17.0	1.80 H	37	62.3	-5.3
8	18075.00	44.4 AV	54.0	-9.6	1.80 H	37	49.7	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

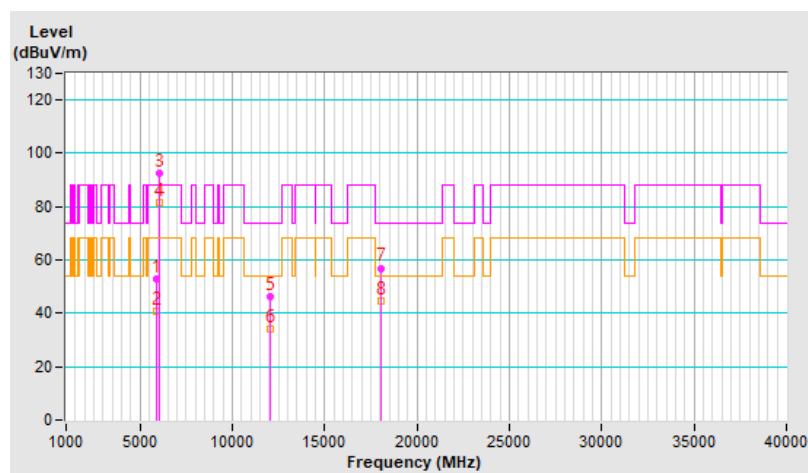


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.9 PK	88.2	-34.3	1.00 V	0	48.3	5.6
2	#5925.00	41.6 AV	68.2	-26.6	1.00 V	0	36.0	5.6
3	*6025.00	95.7 PK			1.00 V	44	90.1	5.6
4	*6025.00	84.2 AV			1.00 V	44	78.6	5.6
5	12050.00	45.3 PK	74.0	-28.7	1.64 V	26	30.7	14.6
6	12050.00	33.5 AV	54.0	-20.5	1.64 V	26	18.9	14.6
7	18075.00	55.8 PK	74.0	-18.2	1.83 V	38	61.1	-5.3
8	18075.00	43.7 AV	54.0	-10.3	1.83 V	38	49.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

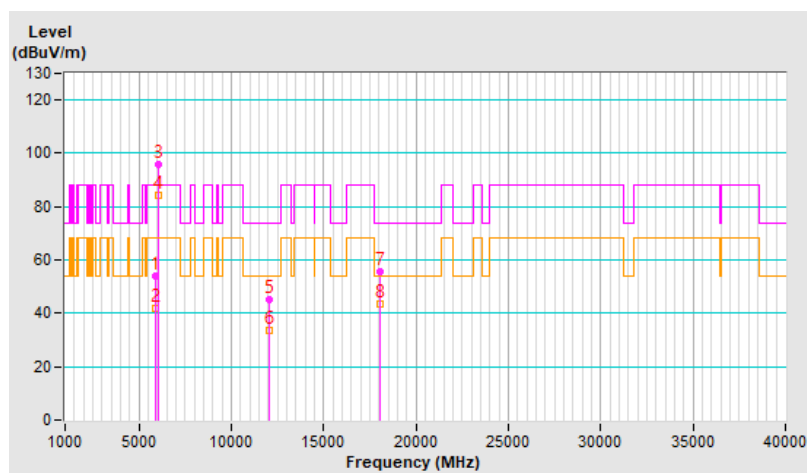


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	92.8 PK			1.00 H	160	86.4	6.4
2	*6345.00	81.9 AV			1.00 H	160	75.5	6.4
3	12690.00	46.3 PK	74.0	-27.7	1.63 H	7	31.4	14.9
4	12690.00	34.2 AV	54.0	-19.8	1.63 H	7	19.3	14.9
5	19035.00	56.6 PK	74.0	-17.4	1.74 H	31	61.5	-4.9
6	19035.00	43.9 AV	54.0	-10.1	1.74 H	31	48.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

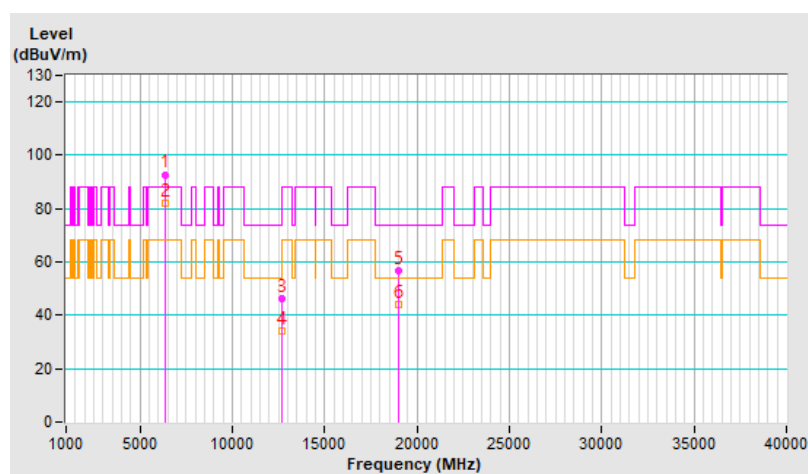


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	95.6 PK			1.00 V	59	89.2	6.4
2	*6345.00	84.2 AV			1.00 V	59	77.8	6.4
3	12690.00	46.3 PK	74.0	-27.7	1.61 V	24	31.4	14.9
4	12690.00	34.3 AV	54.0	-19.7	1.61 V	24	19.4	14.9
5	19035.00	55.8 PK	74.0	-18.2	1.74 V	64	60.7	-4.9
6	19035.00	43.5 AV	54.0	-10.5	1.74 V	64	48.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

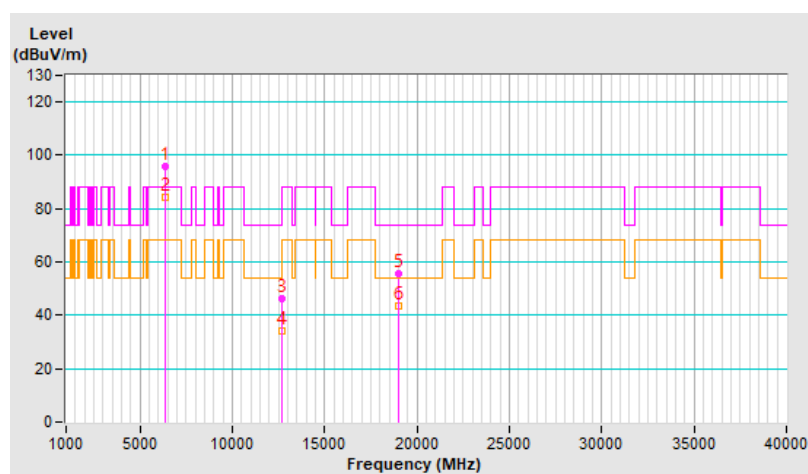


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	93.3 PK			2.06 H	336	85.5	7.8
2	*6665.00	81.7 AV			2.06 H	336	73.9	7.8
3	13330.00	45.6 PK	74.0	-28.4	1.65 H	3	30.3	15.3
4	13330.00	33.9 AV	54.0	-20.1	1.65 H	3	18.6	15.3
5	19995.00	56.3 PK	74.0	-17.7	1.82 H	41	60.7	-4.4
6	19995.00	43.9 AV	54.0	-10.1	1.82 H	41	48.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

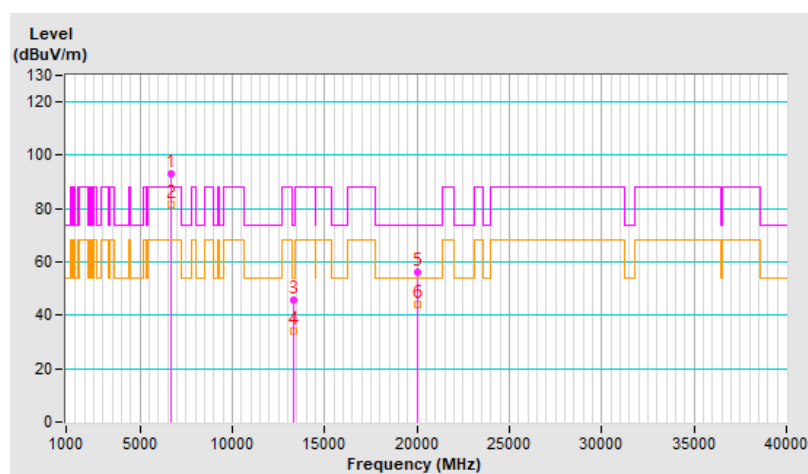


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	91.5 PK			1.31 V	224	83.7	7.8
2	*6665.00	80.2 AV			1.31 V	224	72.4	7.8
3	13330.00	46.0 PK	74.0	-28.0	1.57 V	18	30.7	15.3
4	13330.00	34.1 AV	54.0	-19.9	1.57 V	18	18.8	15.3
5	19995.00	56.4 PK	74.0	-17.6	1.81 V	55	60.8	-4.4
6	19995.00	44.1 AV	54.0	-9.9	1.81 V	55	48.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

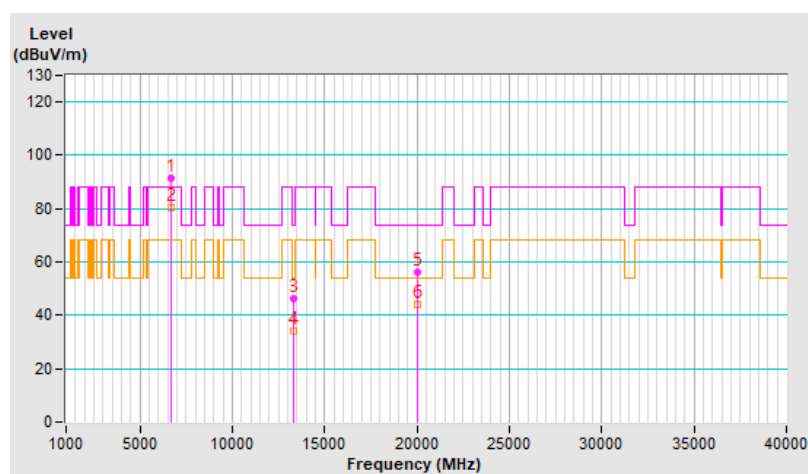


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.01 H	165	46.5	5.6
2	#5925.00	41.1 AV	68.2	-27.1	1.01 H	165	35.5	5.6
3	*6025.00	92.7 PK			1.01 H	165	87.1	5.6
4	*6025.00	81.8 AV			1.01 H	165	76.2	5.6
5	12050.00	46.3 PK	74.0	-27.7	1.71 H	15	31.7	14.6
6	12050.00	34.1 AV	54.0	-19.9	1.71 H	15	19.5	14.6
7	18075.00	56.2 PK	74.0	-17.8	1.73 H	42	61.5	-5.3
8	18075.00	43.9 AV	54.0	-10.1	1.73 H	42	49.2	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

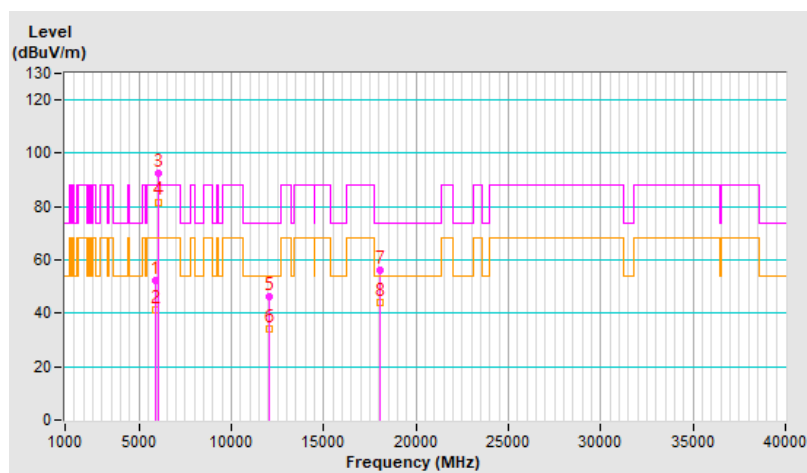


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.1 PK	88.2	-31.1	1.00 V	54	51.5	5.6
2	#5925.00	42.2 AV	68.2	-26.0	1.00 V	54	36.6	5.6
3	*6025.00	97.1 PK			1.00 V	54	91.5	5.6
4	*6025.00	85.3 AV			1.00 V	54	79.7	5.6
5	12050.00	45.0 PK	74.0	-29.0	1.57 V	22	30.4	14.6
6	12050.00	33.5 AV	54.0	-20.5	1.57 V	22	18.9	14.6
7	18075.00	56.1 PK	74.0	-17.9	1.76 V	60	61.4	-5.3
8	18075.00	43.6 AV	54.0	-10.4	1.76 V	60	48.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

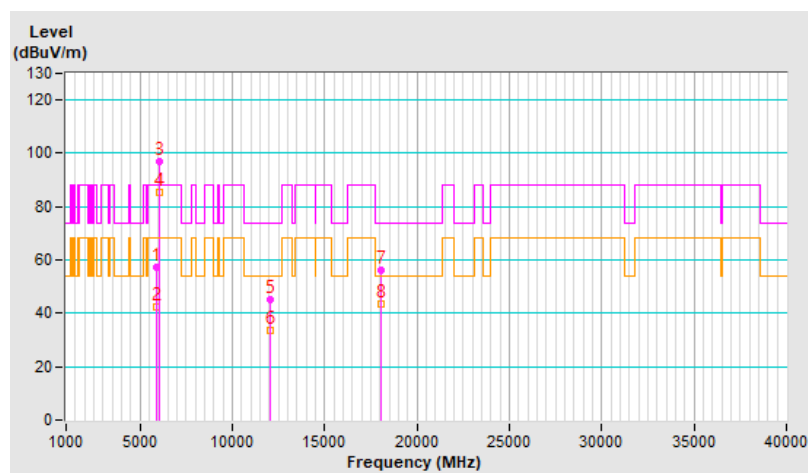


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	93.1 PK			1.04 H	177	86.7	6.4
2	*6345.00	82.1 AV			1.04 H	177	75.7	6.4
3	12690.00	46.5 PK	74.0	-27.5	1.67 H	14	31.6	14.9
4	12690.00	34.8 AV	54.0	-19.2	1.67 H	14	19.9	14.9
5	19035.00	56.6 PK	74.0	-17.4	1.77 H	49	61.5	-4.9
6	19035.00	44.2 AV	54.0	-9.8	1.77 H	49	49.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

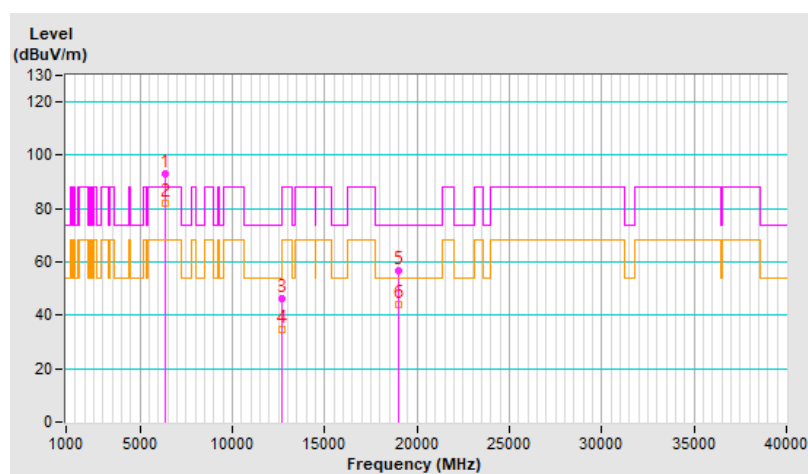


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.9 PK			1.04 V	70	90.5	6.4
2	*6345.00	85.0 AV			1.04 V	70	78.6	6.4
3	12690.00	45.9 PK	74.0	-28.1	1.56 V	27	31.0	14.9
4	12690.00	34.2 AV	54.0	-19.8	1.56 V	27	19.3	14.9
5	19035.00	56.4 PK	74.0	-17.6	1.77 V	61	61.3	-4.9
6	19035.00	43.9 AV	54.0	-10.1	1.77 V	61	48.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

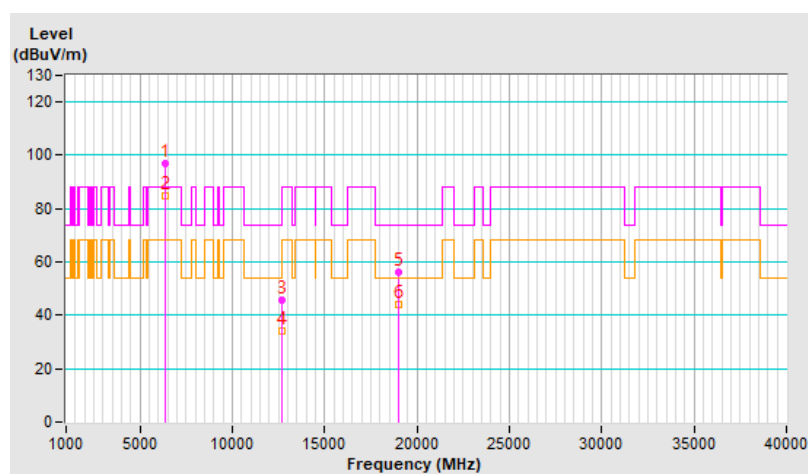


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	93.0 PK			2.24 H	337	85.2	7.8
2	*6665.00	81.3 AV			2.24 H	337	73.5	7.8
3	13330.00	45.8 PK	74.0	-28.2	1.61 H	15	30.5	15.3
4	13330.00	34.0 AV	54.0	-20.0	1.61 H	15	18.7	15.3
5	19995.00	56.9 PK	74.0	-17.1	1.73 H	57	61.3	-4.4
6	19995.00	44.5 AV	54.0	-9.5	1.73 H	57	48.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

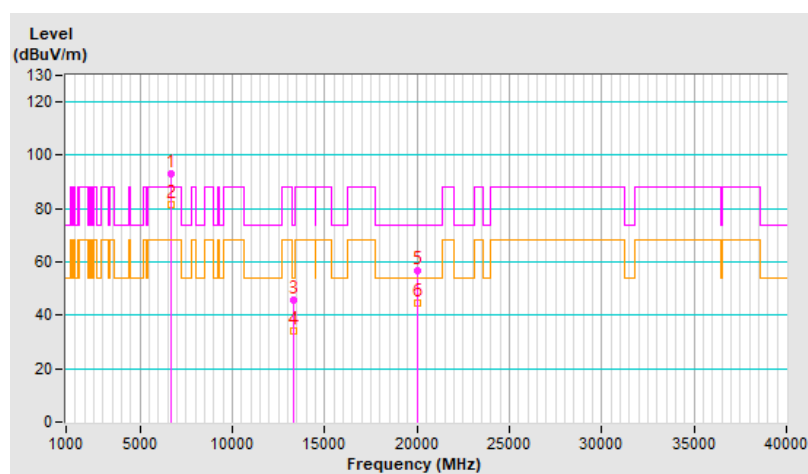


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	91.0 PK			1.50 V	224	83.2	7.8
2	*6665.00	80.2 AV			1.50 V	224	72.4	7.8
3	13330.00	45.4 PK	74.0	-28.6	1.65 V	25	30.1	15.3
4	13330.00	33.6 AV	54.0	-20.4	1.65 V	25	18.3	15.3
5	19995.00	56.0 PK	74.0	-18.0	1.74 V	48	60.4	-4.4
6	19995.00	43.8 AV	54.0	-10.2	1.74 V	48	48.2	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

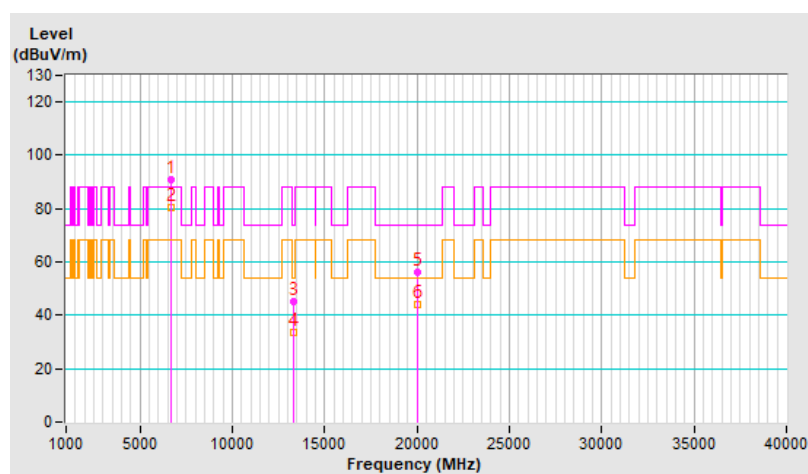


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11a Channel 1

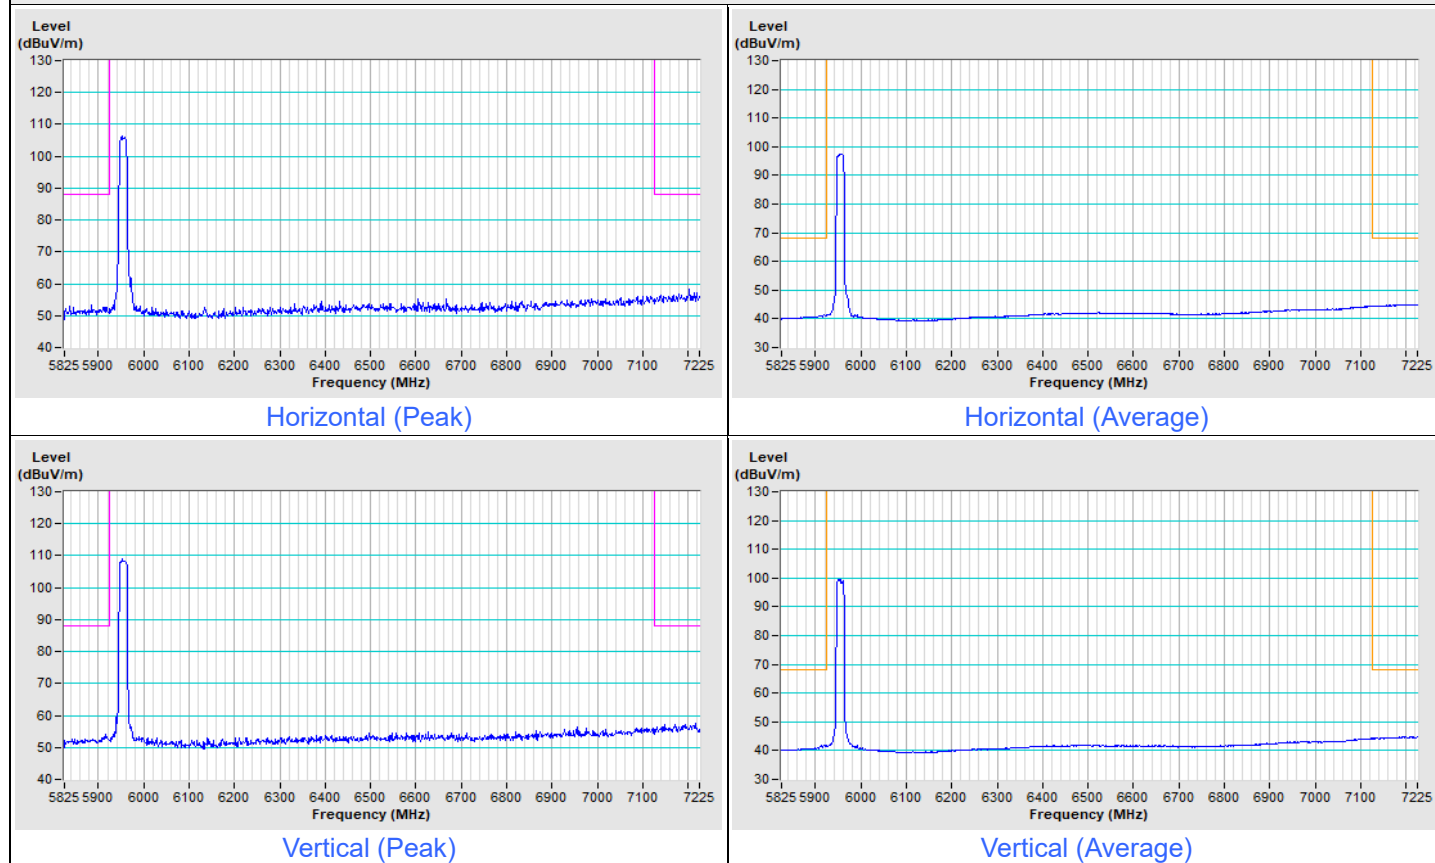


802.11a Channel 181

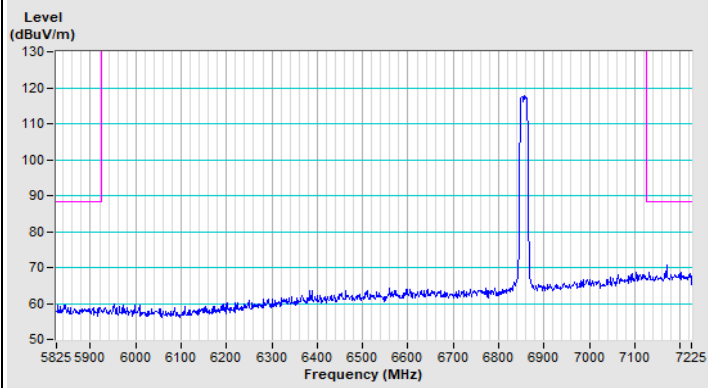


Horizontal (Peak)

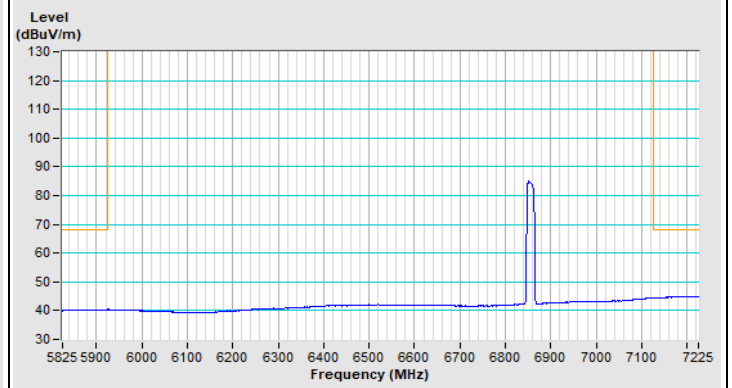

Horizontal (Average)

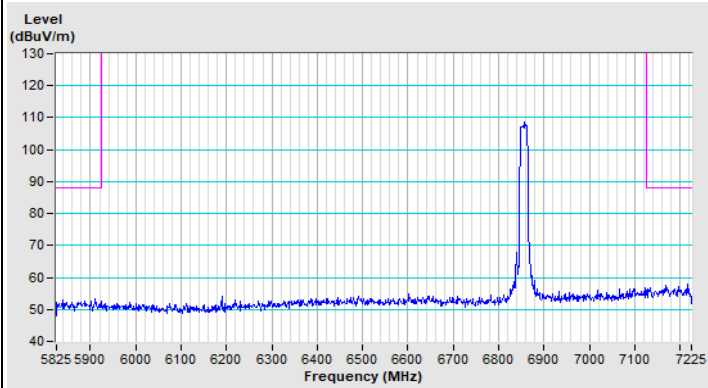


Vertical (Peak)

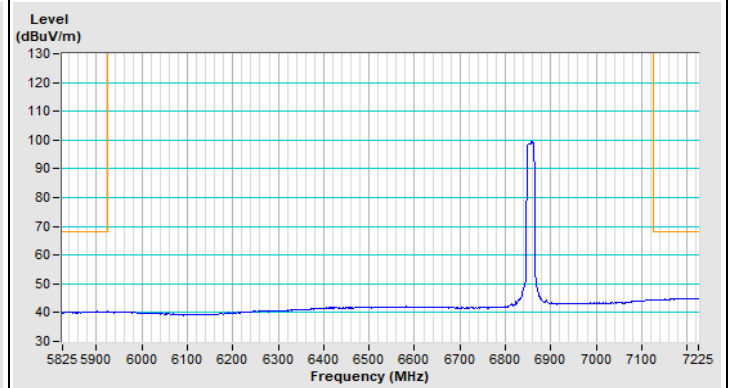


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) Channel 1

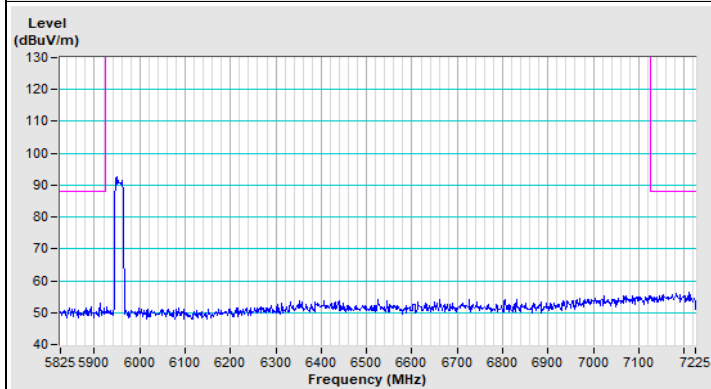


Horizontal (Peak)

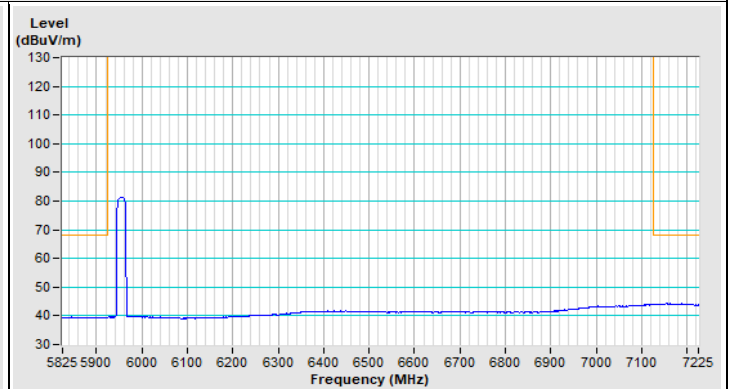


Horizontal (Average)

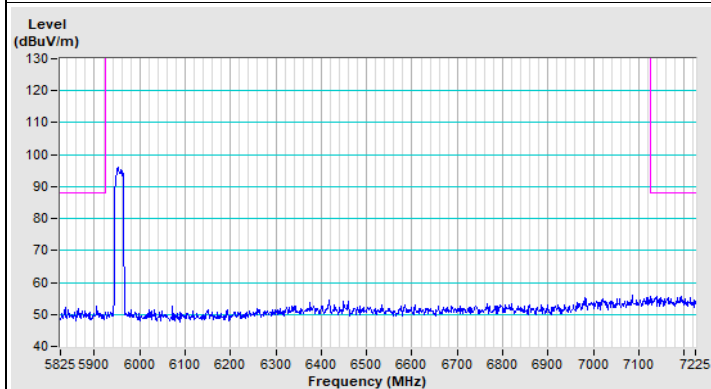


Vertical (Peak)

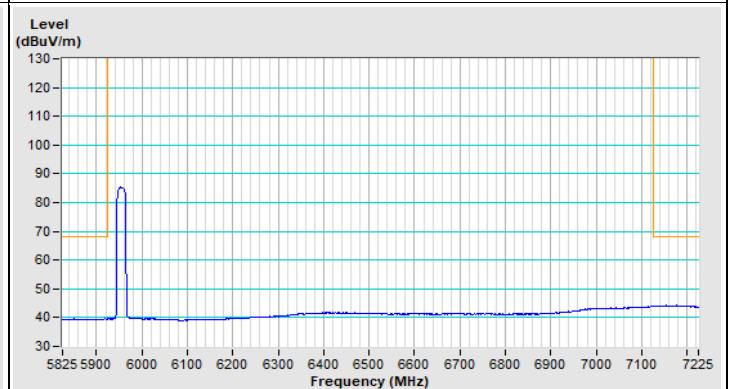


Vertical (Average)

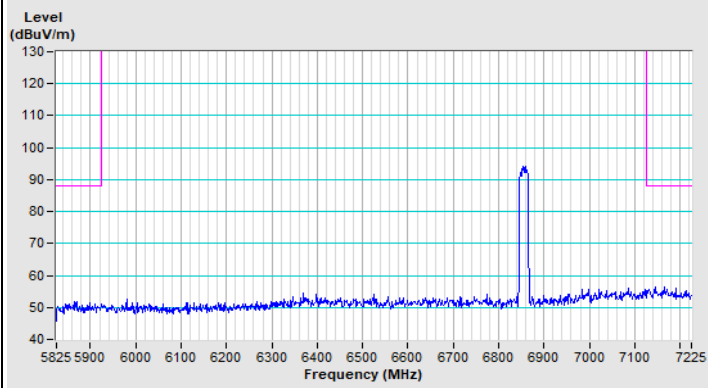802.11be (EHT20) Channel 181


Horizontal (Peak)

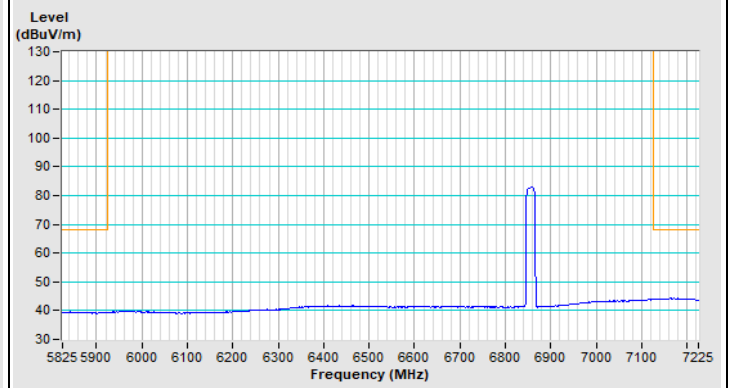

Horizontal (Average)

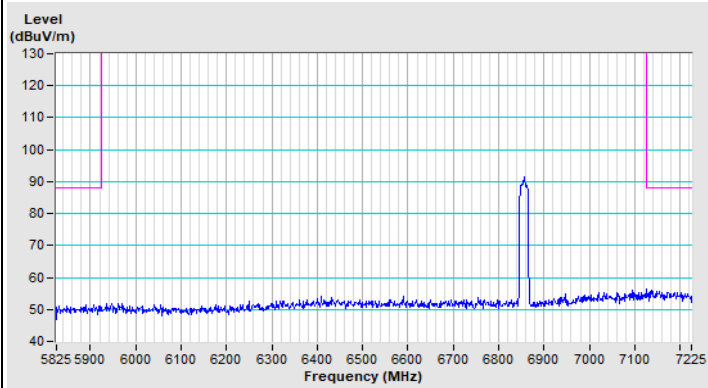


Vertical (Peak)

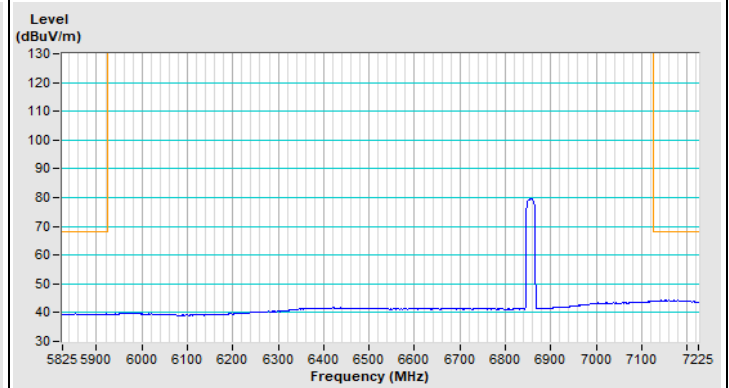


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 3

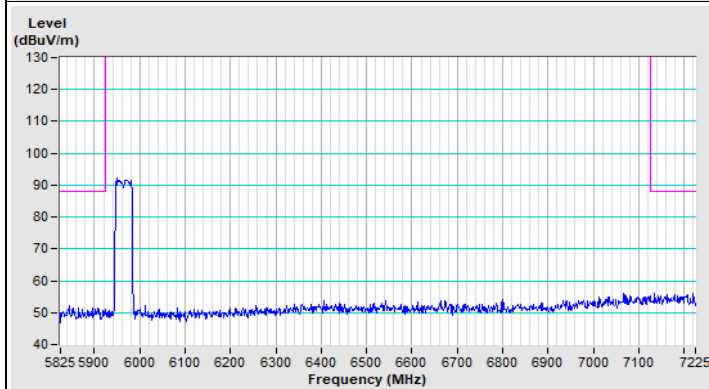


Horizontal (Peak)

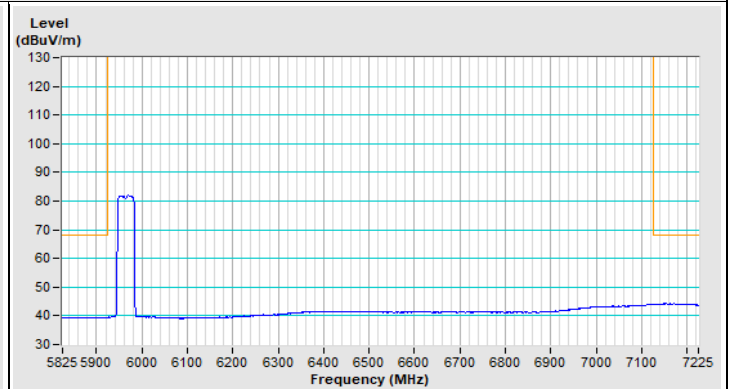


Horizontal (Average)

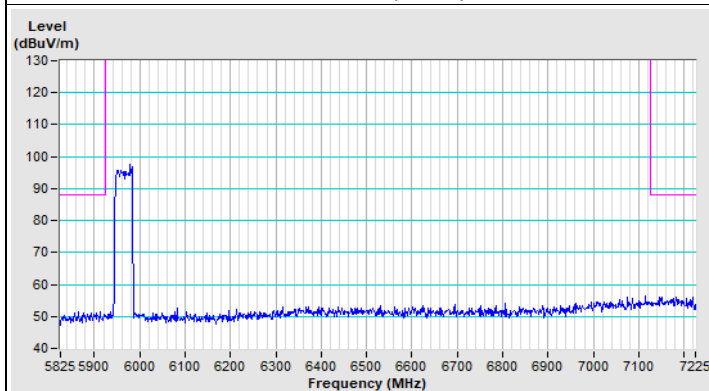


Vertical (Peak)

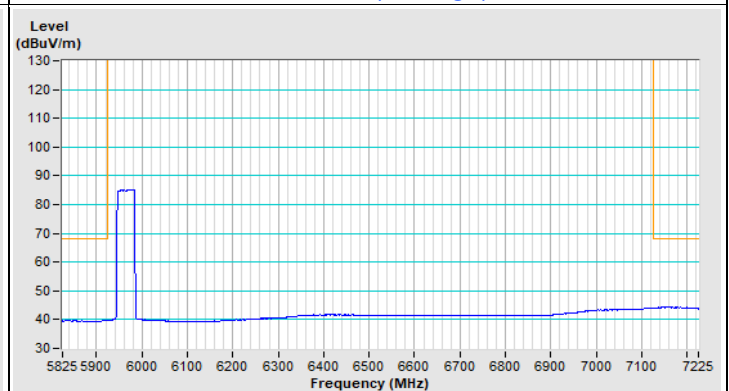


Vertical (Average)

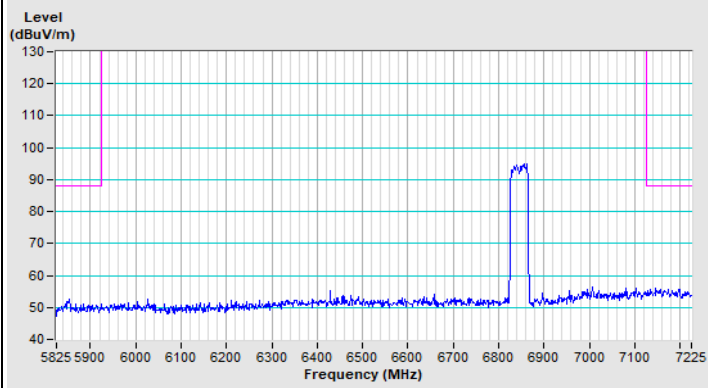802.11be (EHT40) Channel 179


Horizontal (Peak)

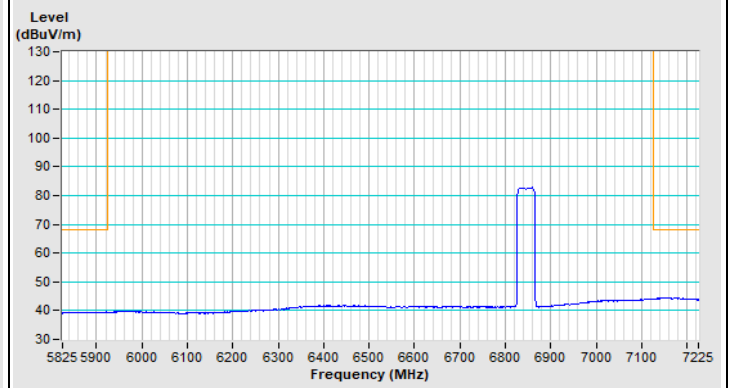

Horizontal (Average)

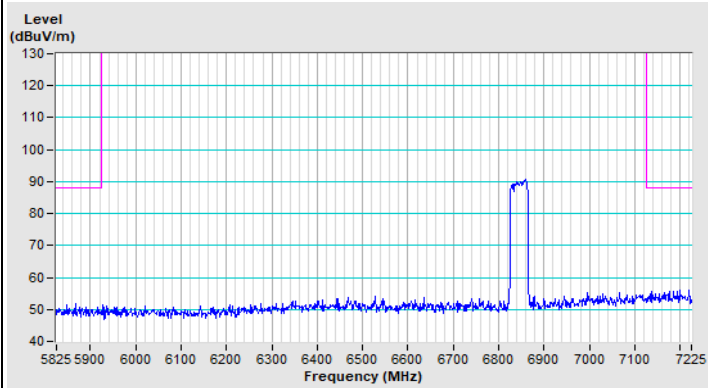


Vertical (Peak)

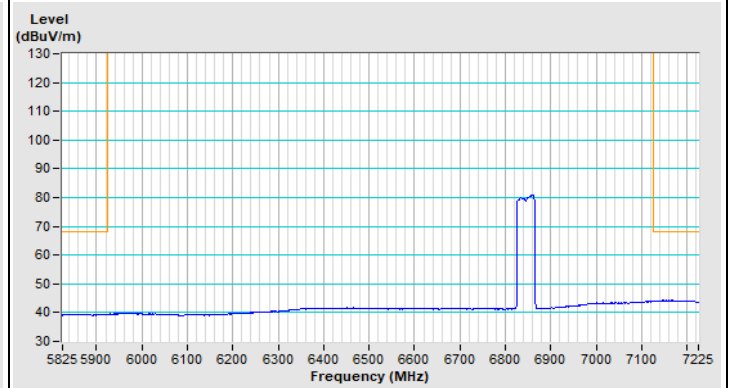


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 7

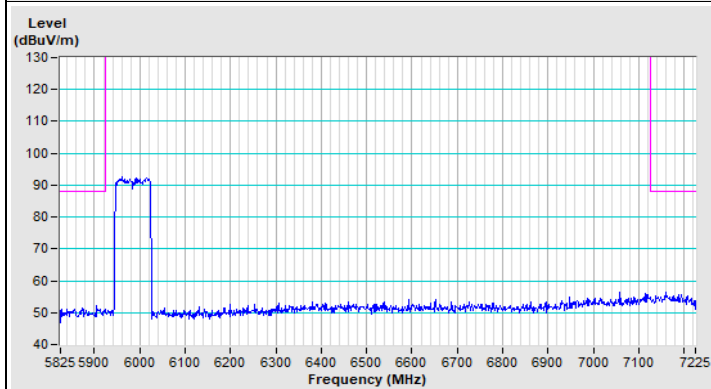


Horizontal (Peak)

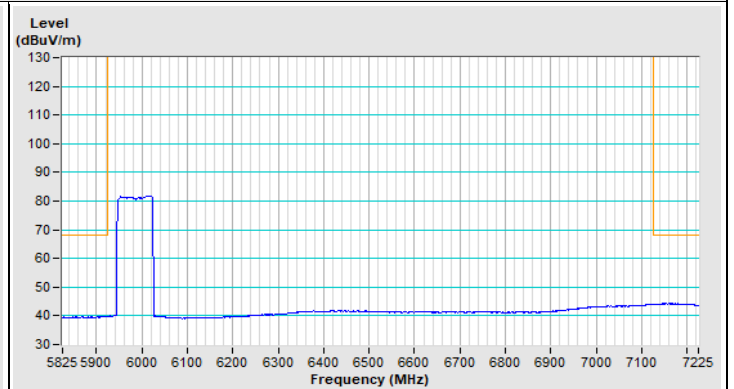

Horizontal (Average)

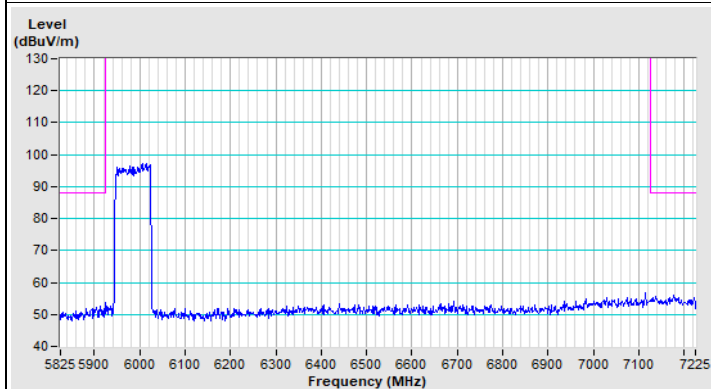


Vertical (Peak)

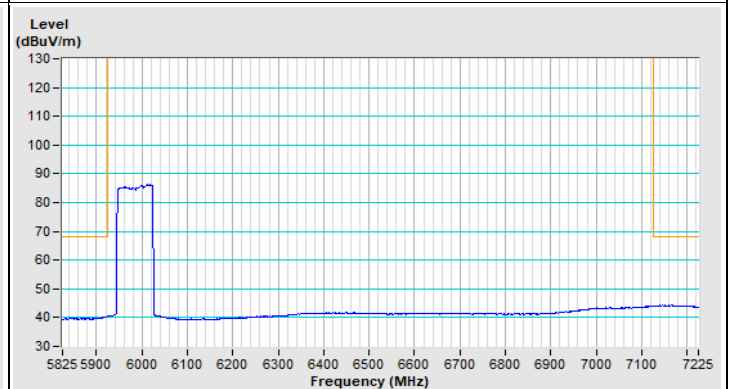


Vertical (Average)


802.11be (EHT80) Channel 167

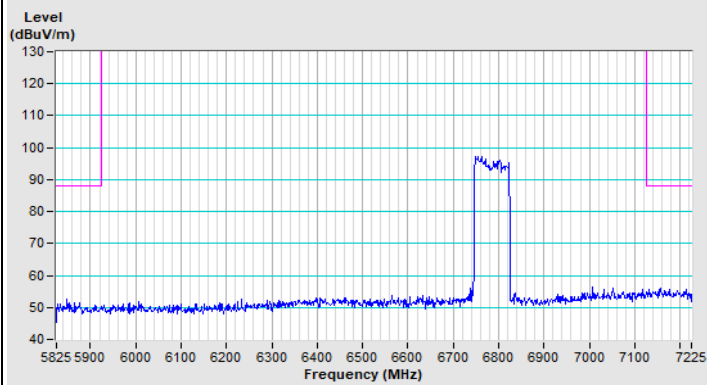


Horizontal (Peak)

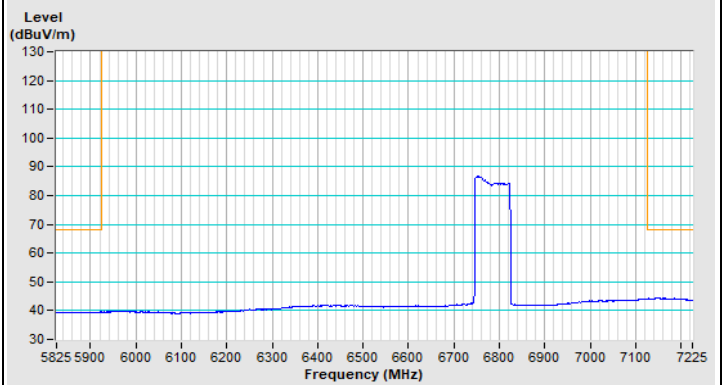

Horizontal (Average)

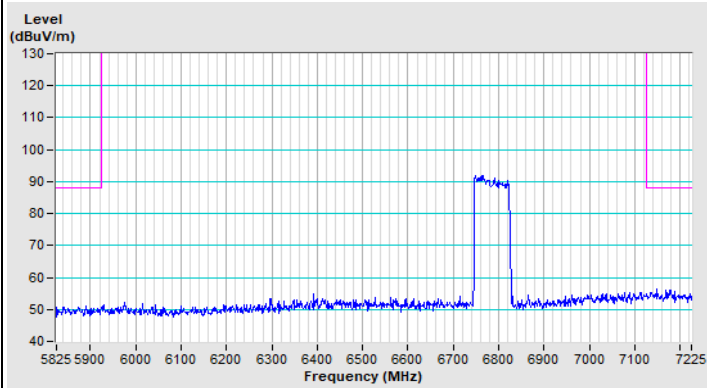


Vertical (Peak)

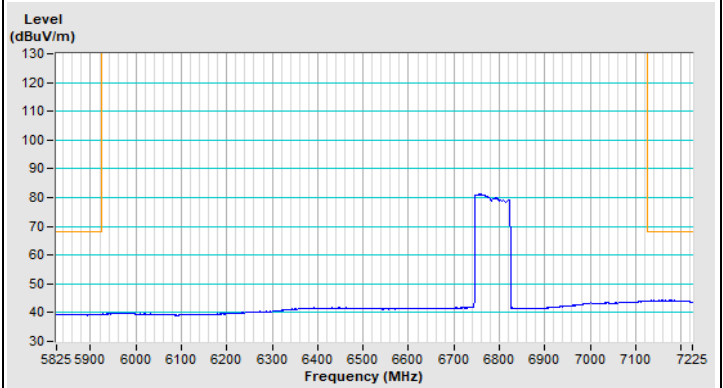


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 15

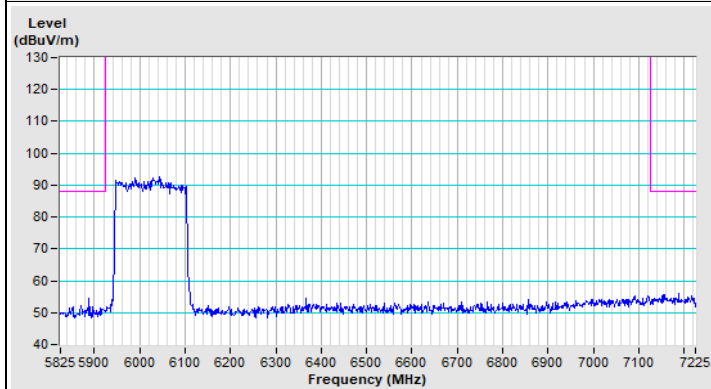


Horizontal (Peak)

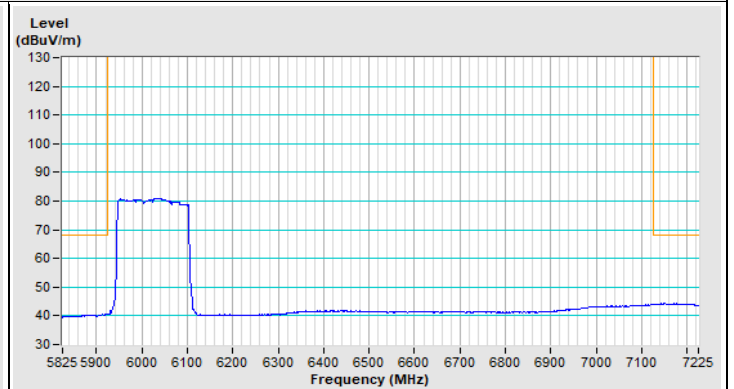

Horizontal (Average)

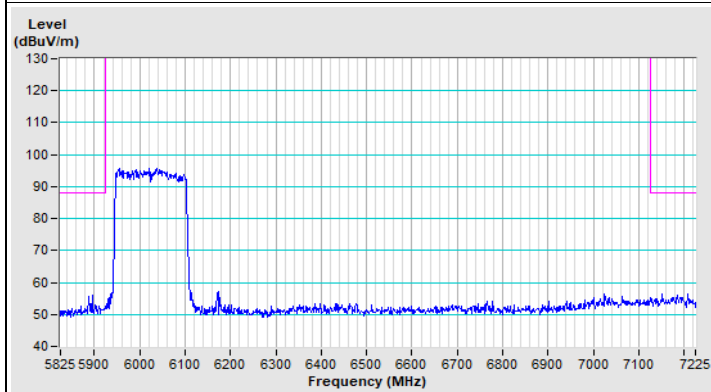


Vertical (Peak)

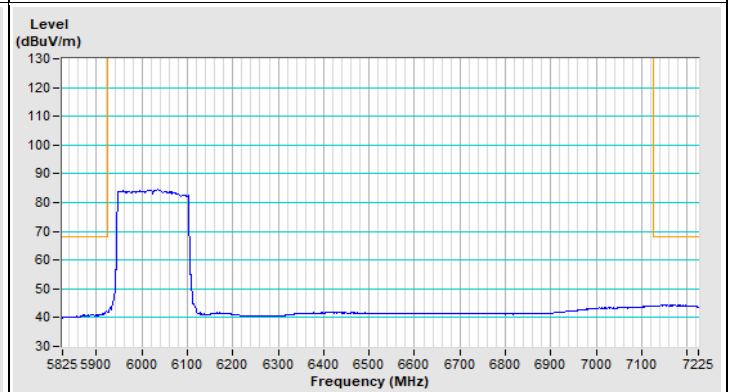


Vertical (Average)


802.11be (EHT160) Channel 143

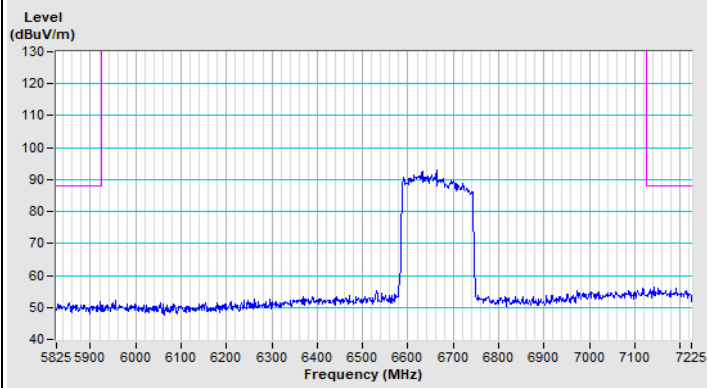


Horizontal (Peak)

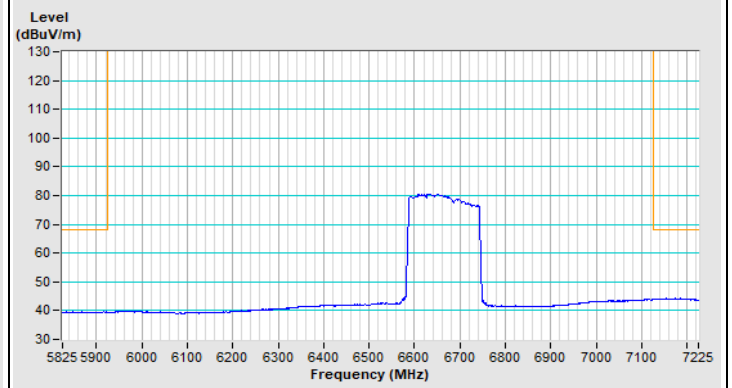

Horizontal (Average)

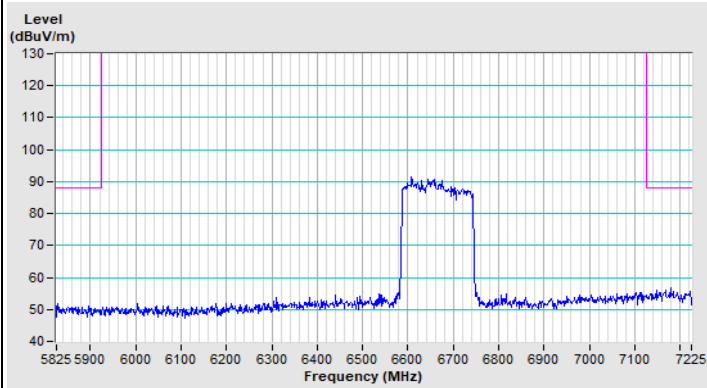


Vertical (Peak)

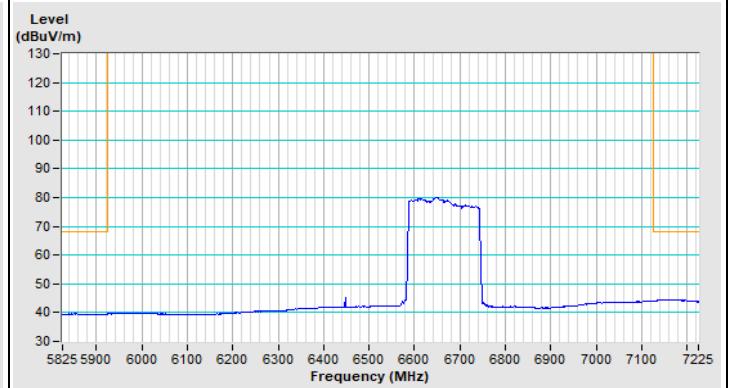


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 1

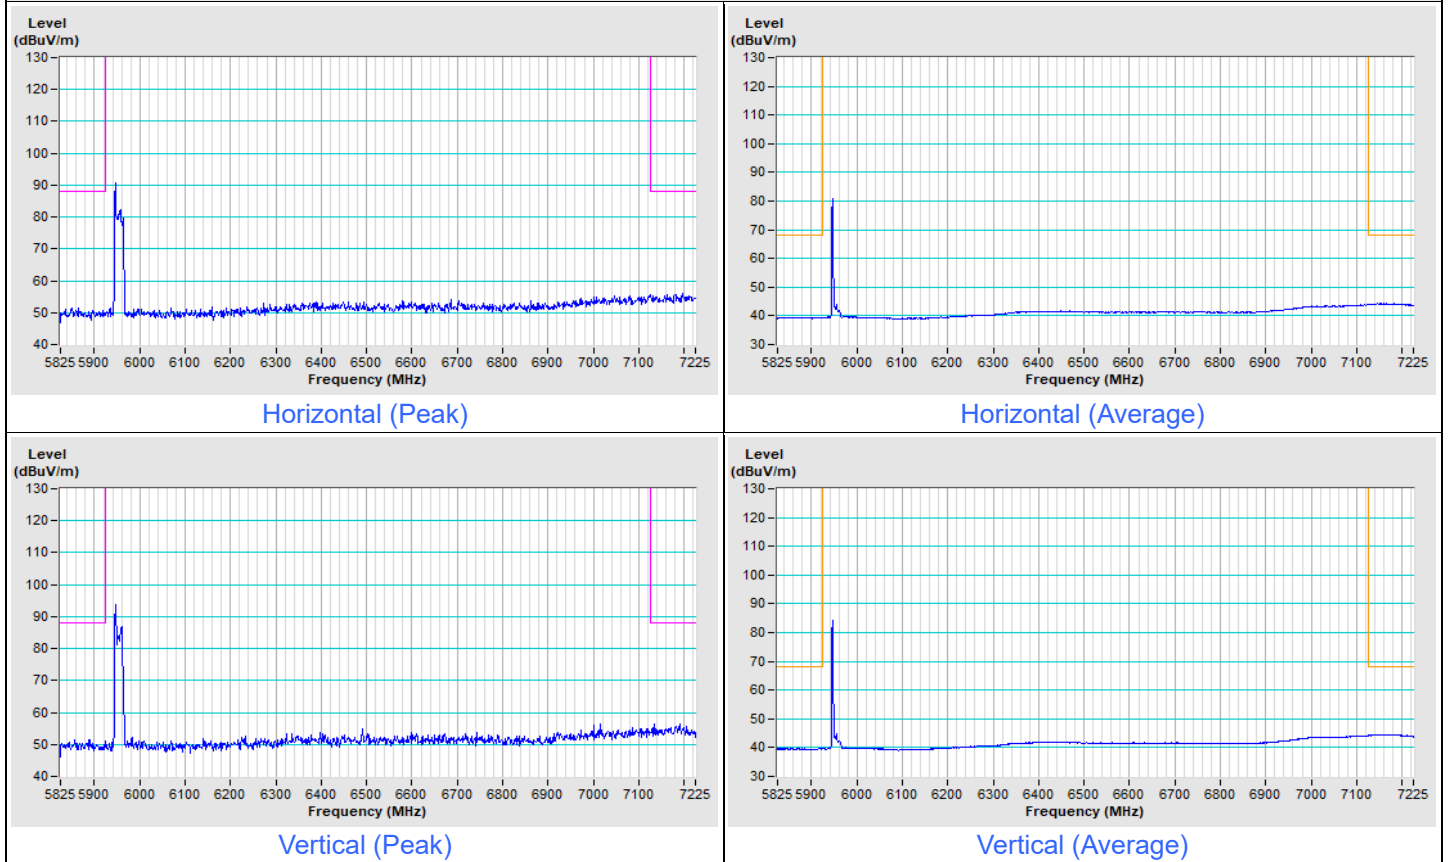


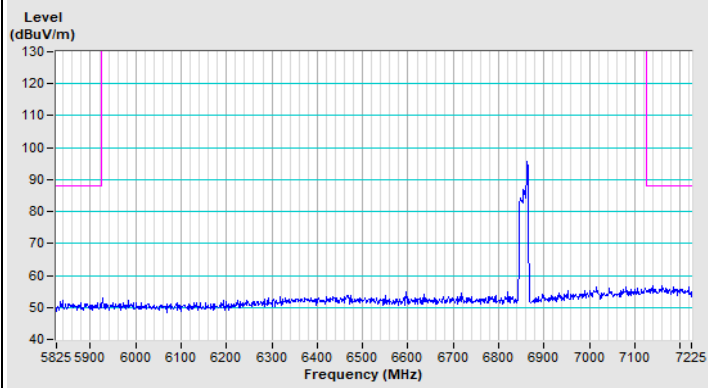802.11be (EHT20) 26-tone RU Channel 181


Horizontal (Peak)

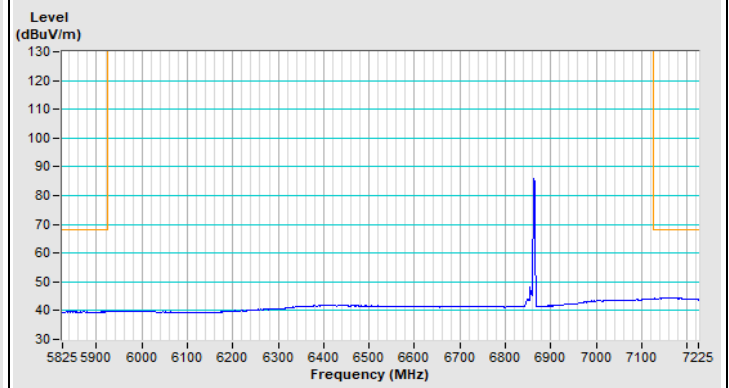

Horizontal (Average)

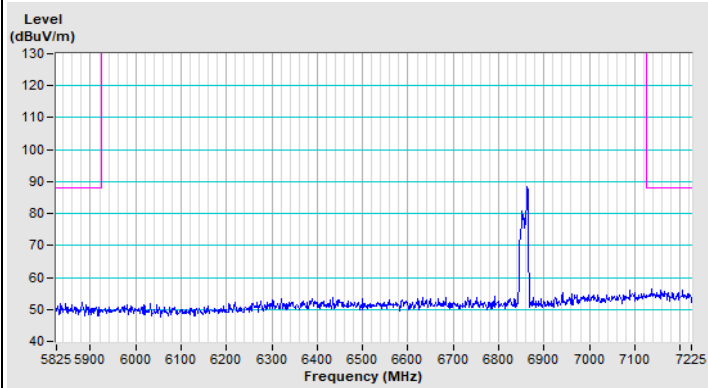


Vertical (Peak)

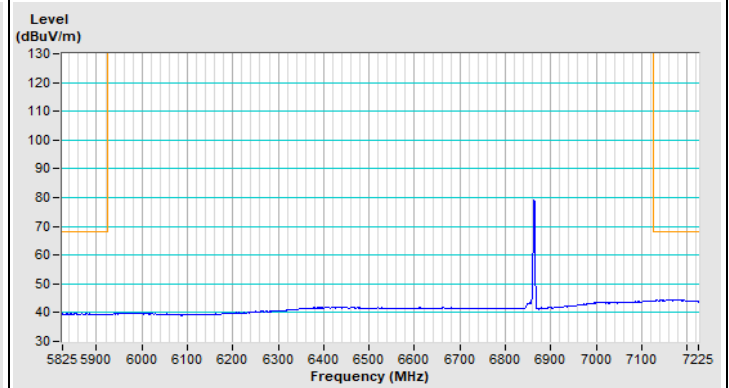


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

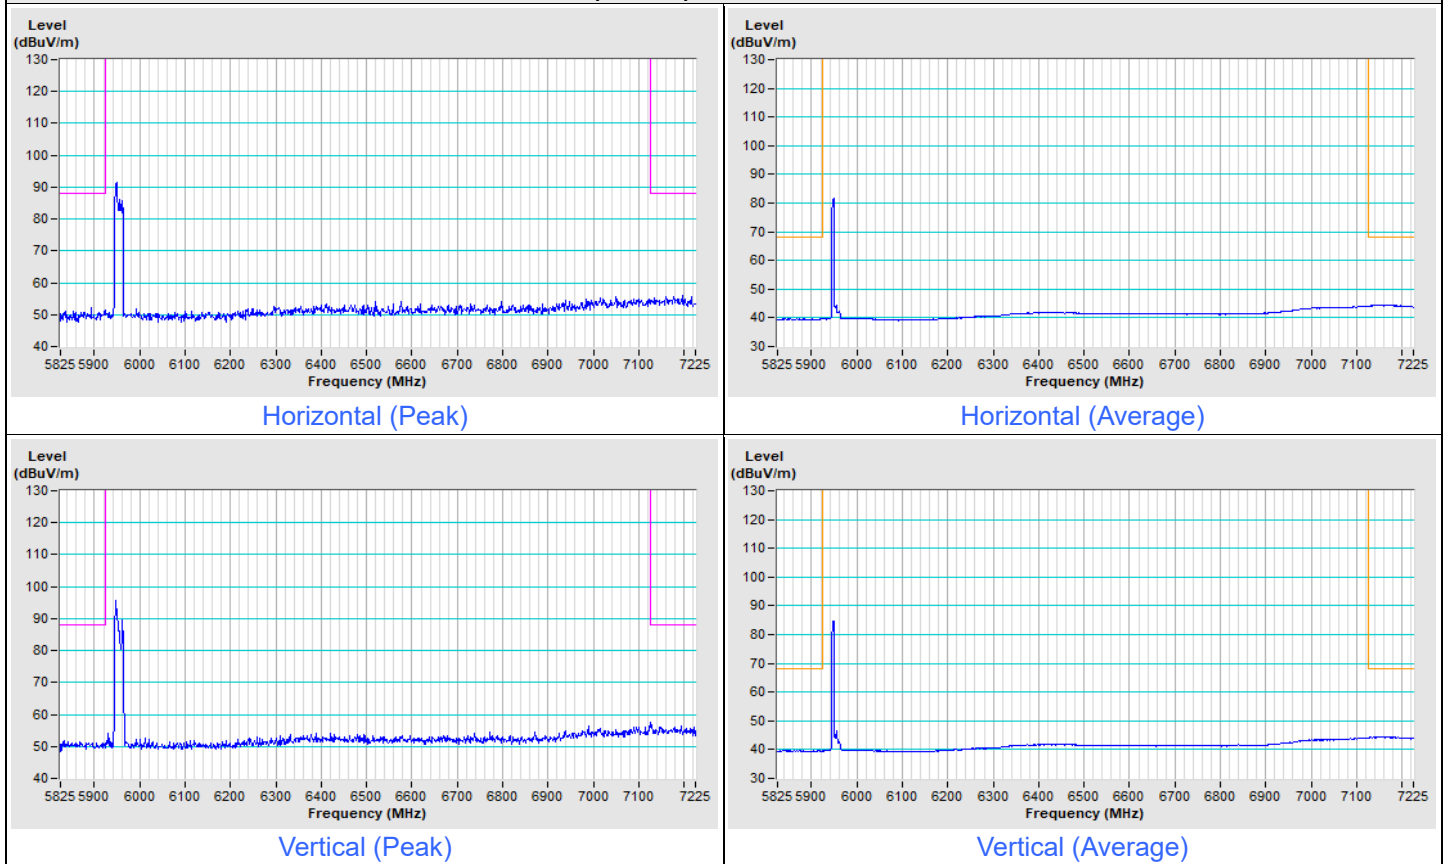


802.11be (EHT20) 52-tone RU Channel 181

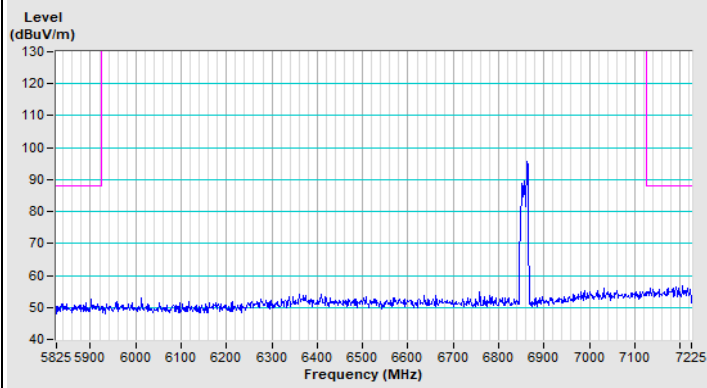


Horizontal (Peak)

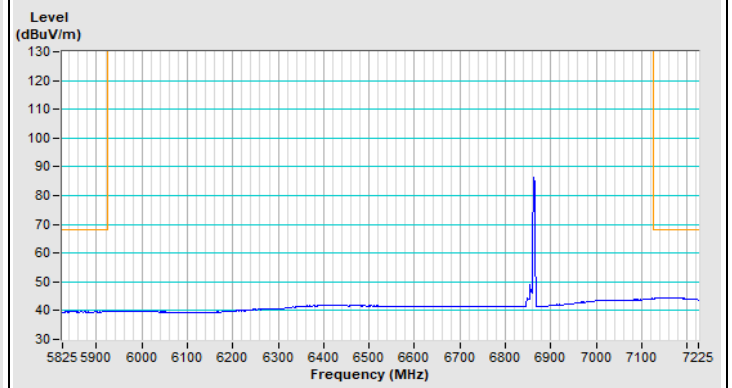

Horizontal (Average)

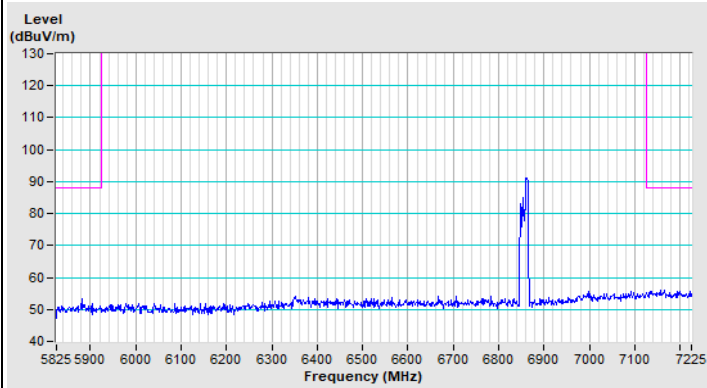


Vertical (Peak)

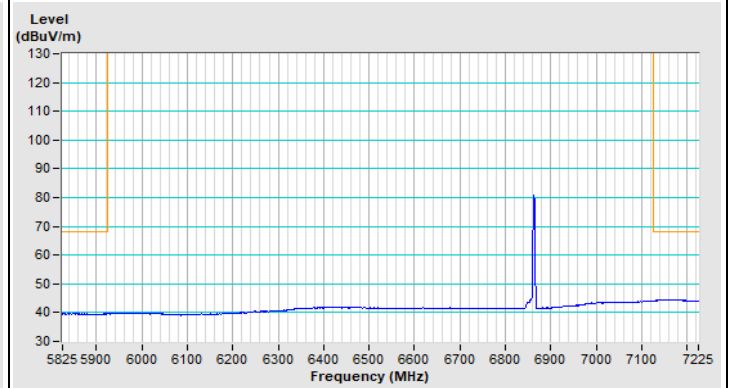


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

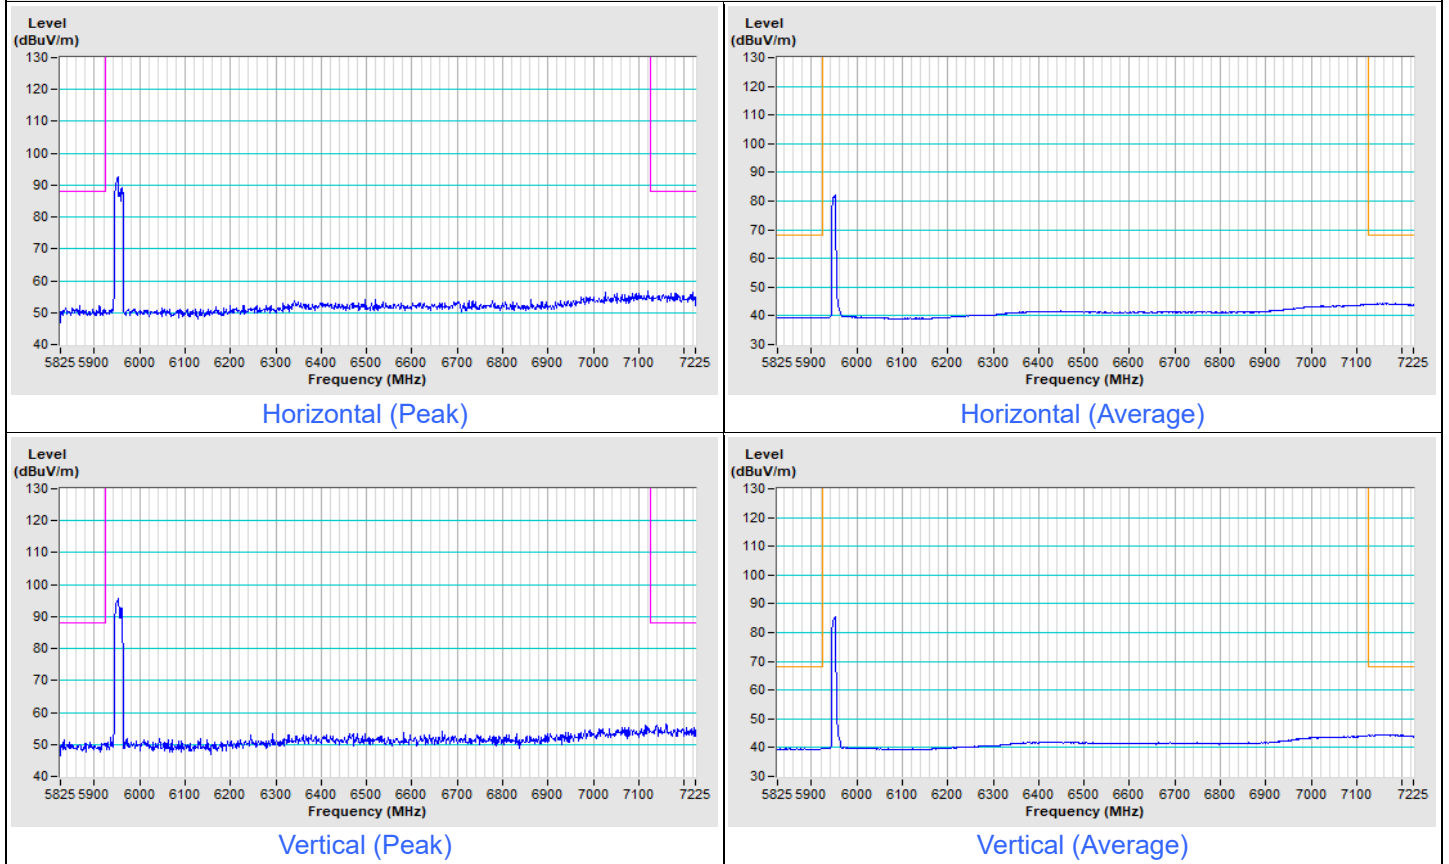


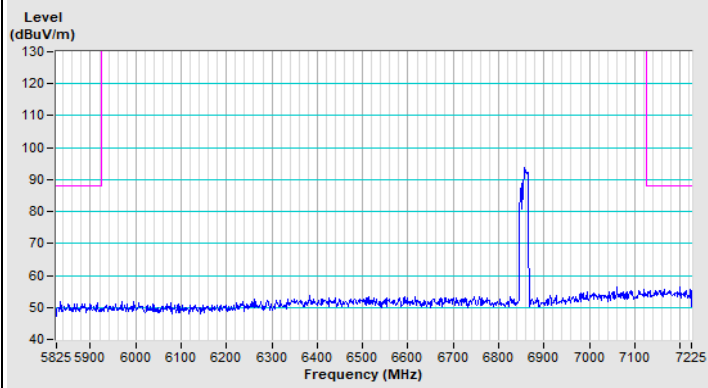802.11be (EHT20) 106-tone RU Channel 181


Horizontal (Peak)

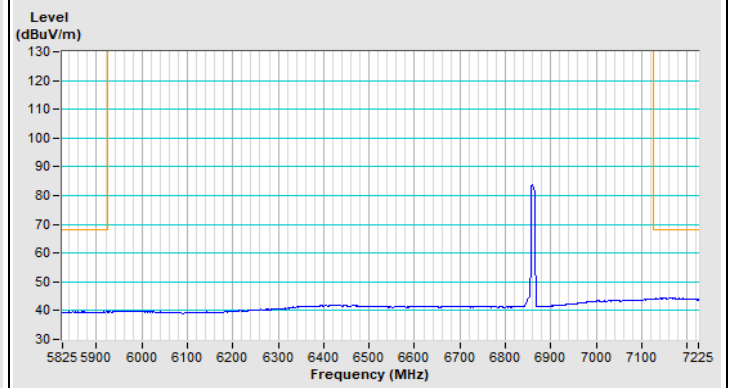

Horizontal (Average)

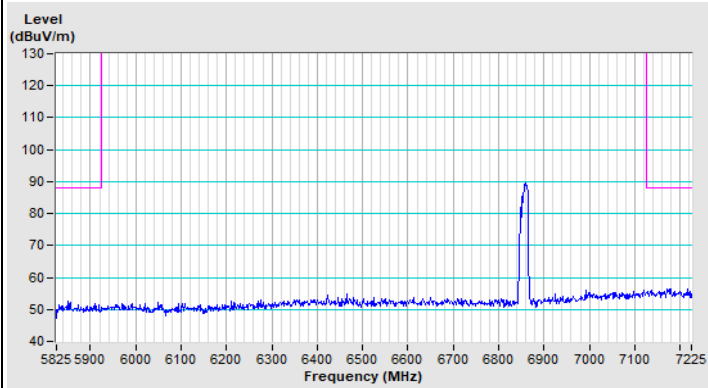


Vertical (Peak)

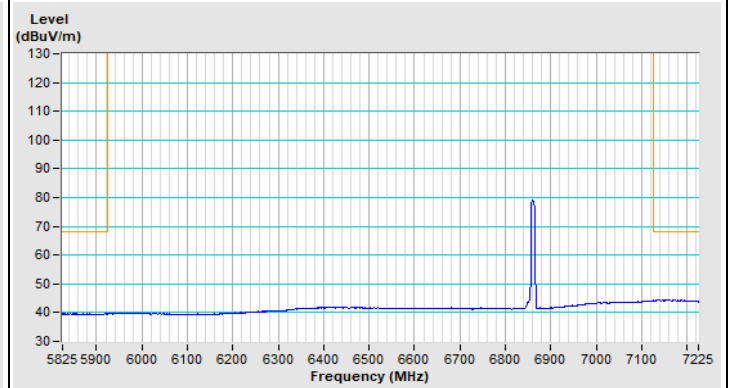


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

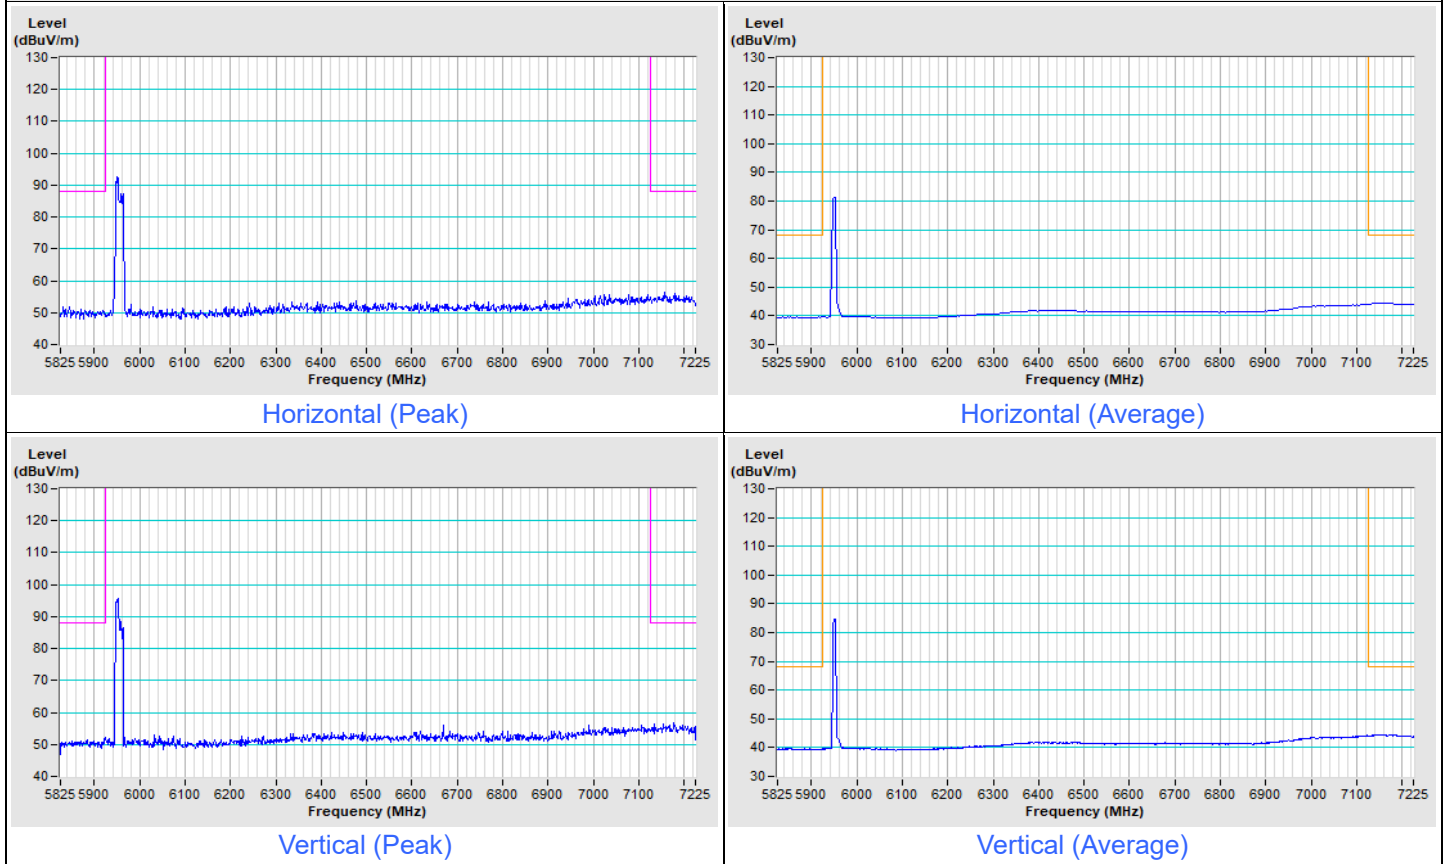


802.11be (EHT20) 52+26-tone MRU Channel 181

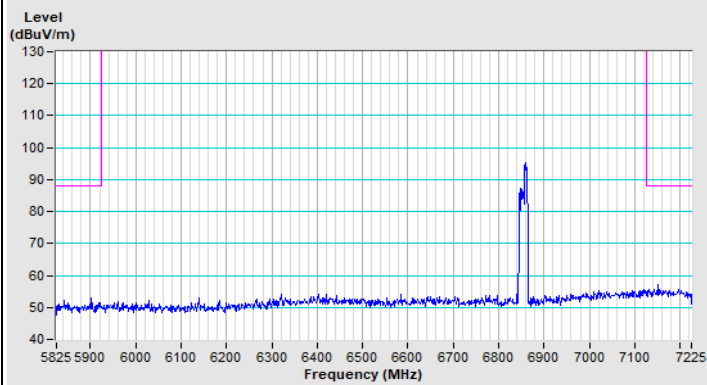


Horizontal (Peak)

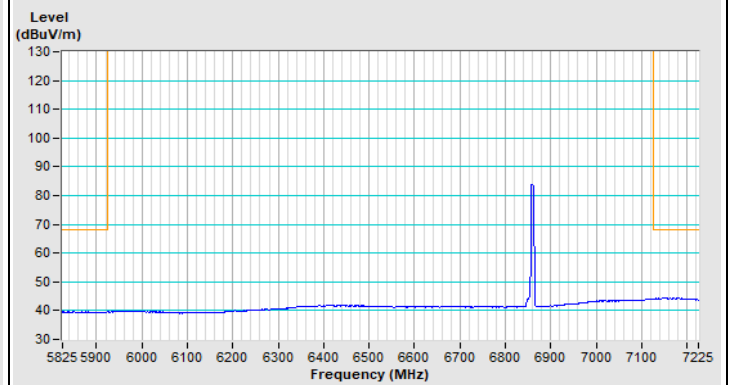

Horizontal (Average)

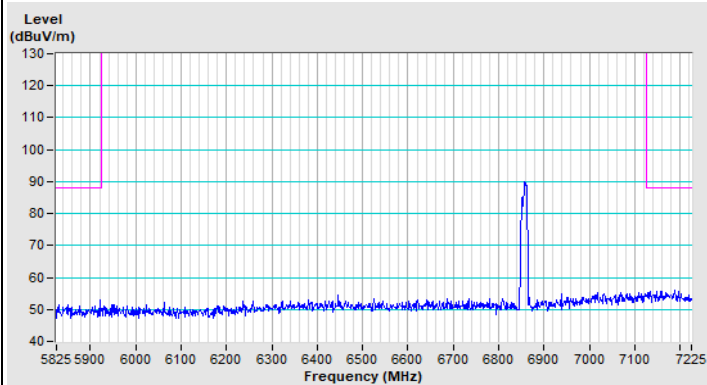


Vertical (Peak)

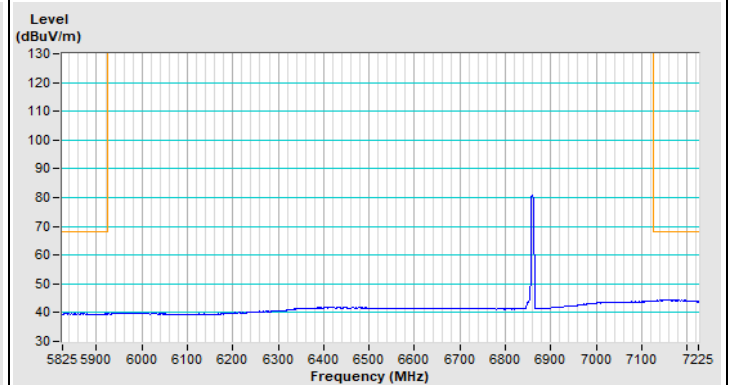


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

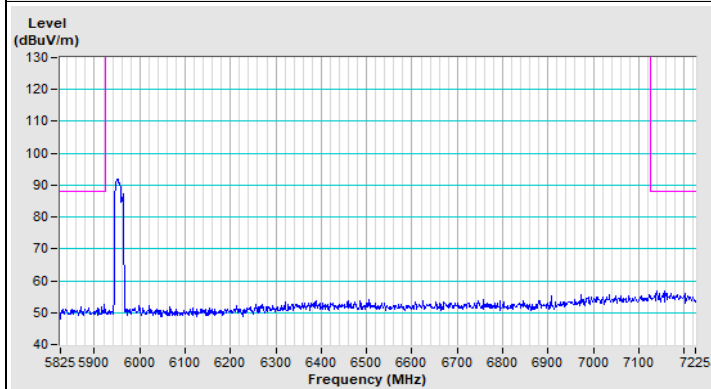


Horizontal (Peak)

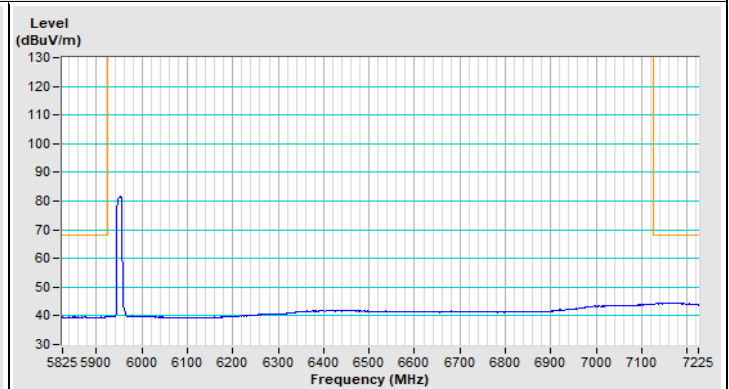

Horizontal (Average)

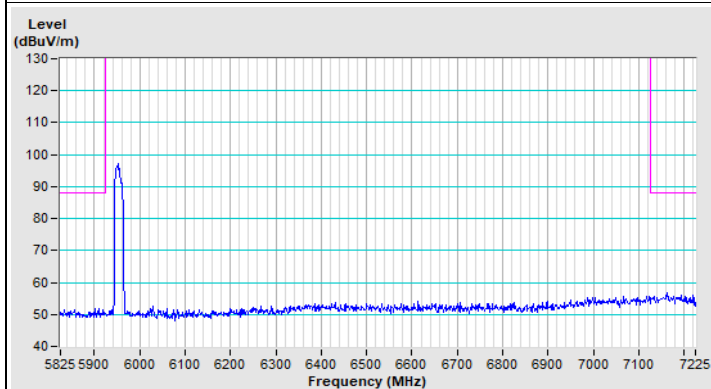


Vertical (Peak)

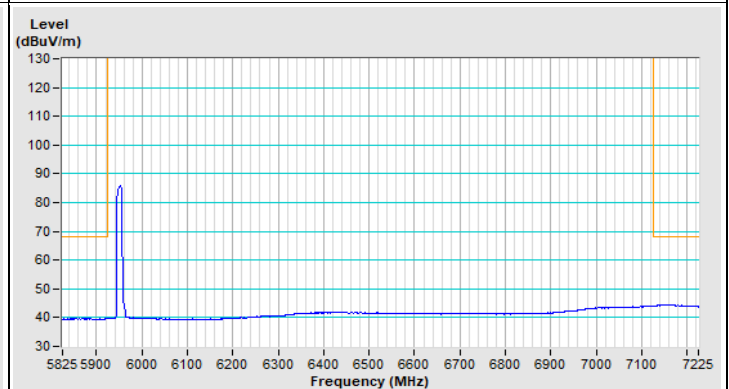


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 181

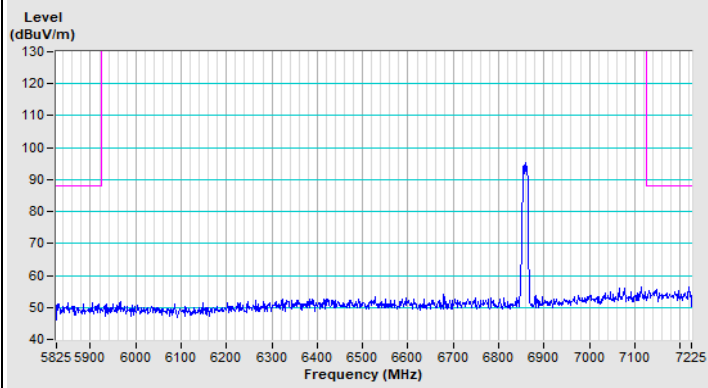


Horizontal (Peak)

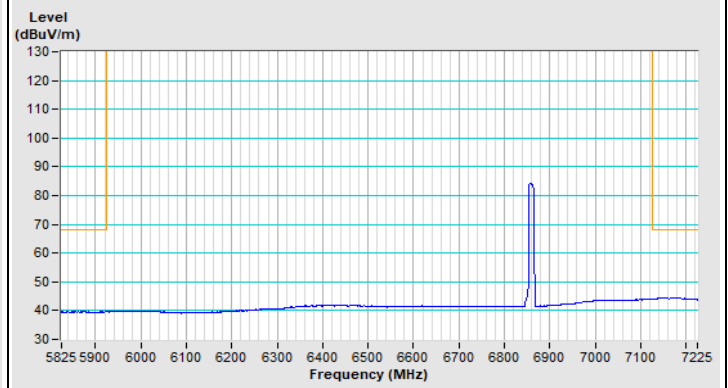

Horizontal (Average)

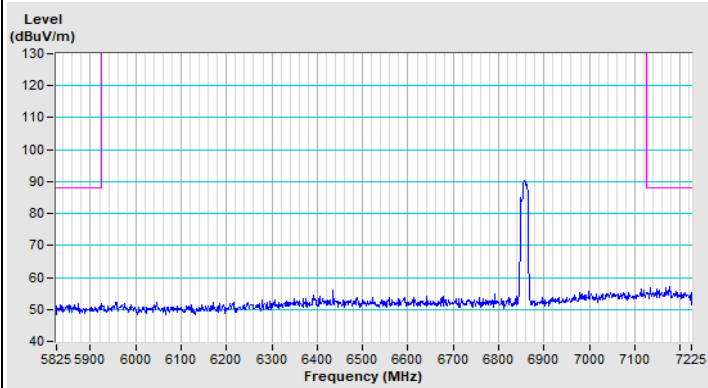


Vertical (Peak)

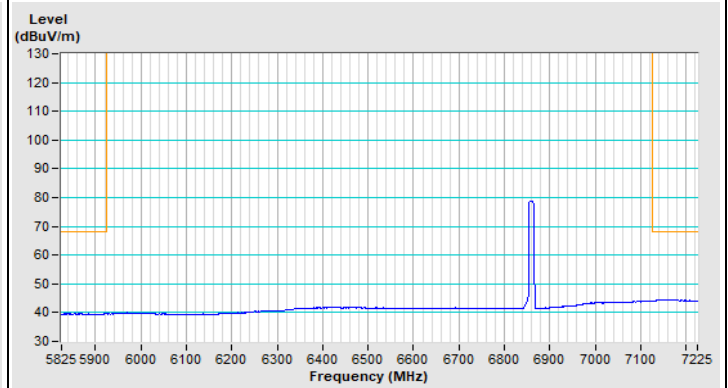


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

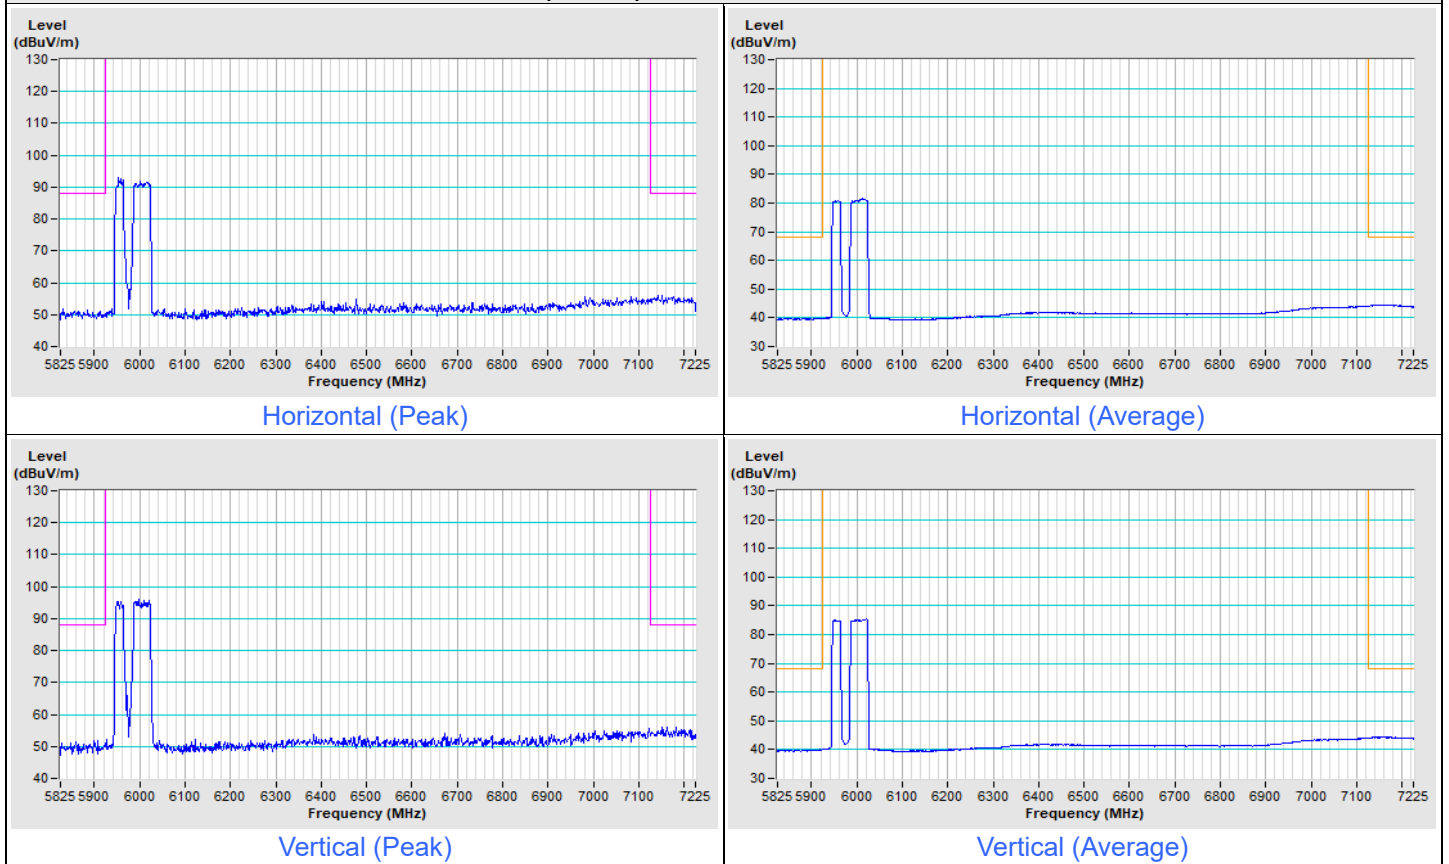


802.11be (EHT80) 484+242-tone MRU Channel 167

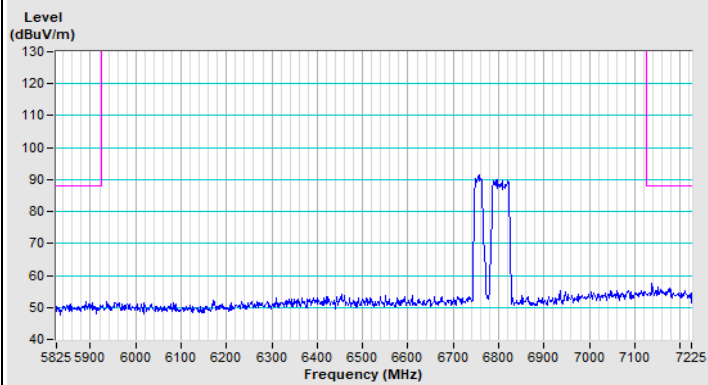


Horizontal (Peak)

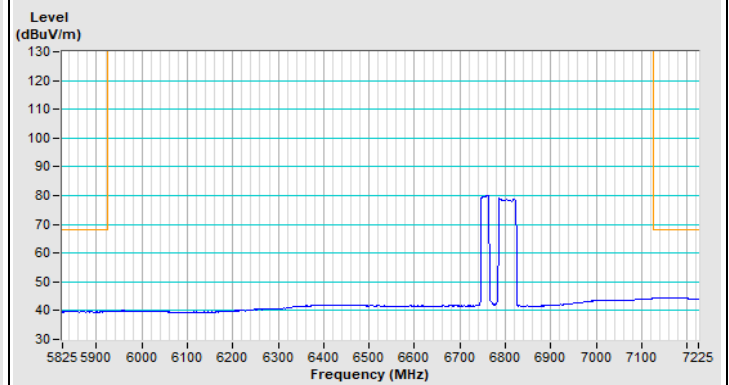

Horizontal (Average)

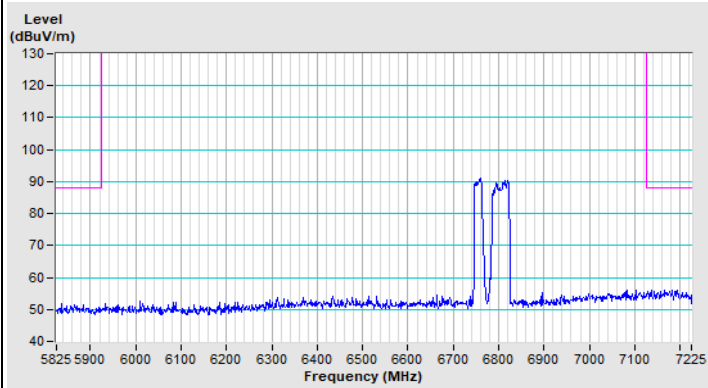


Vertical (Peak)

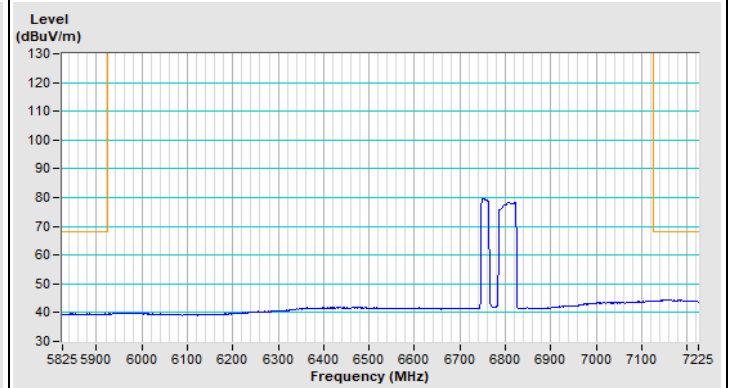


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

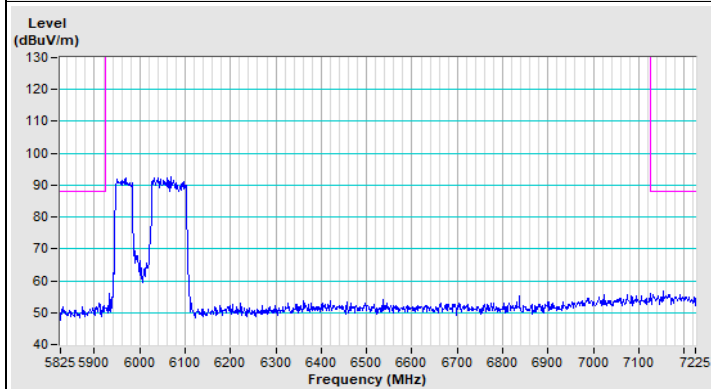


Horizontal (Peak)

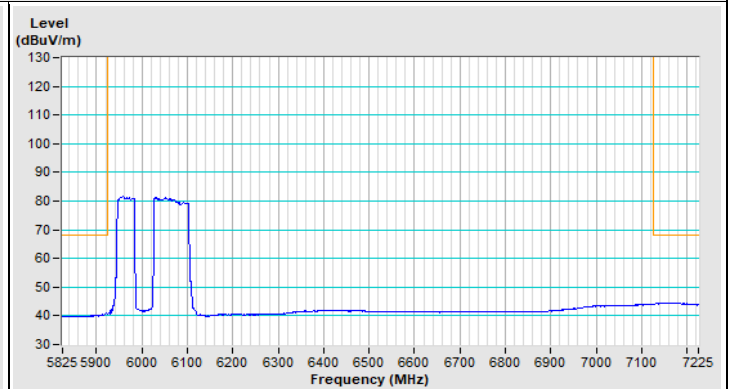

Horizontal (Average)

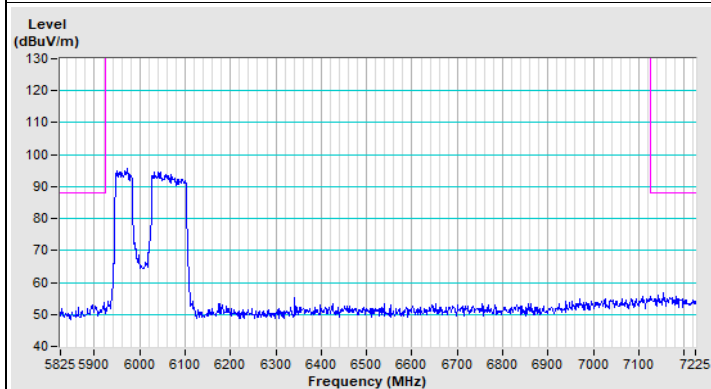


Vertical (Peak)

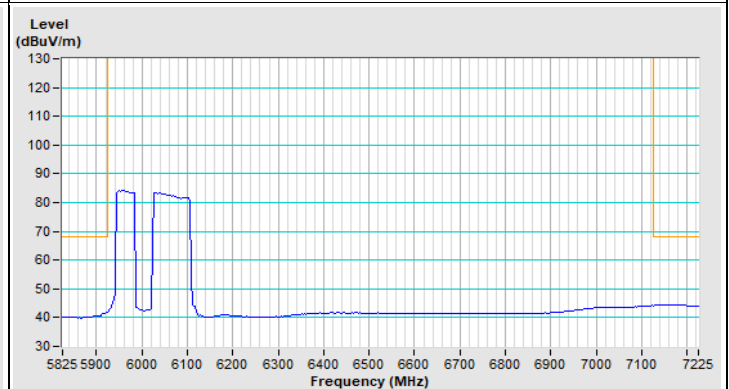


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 143

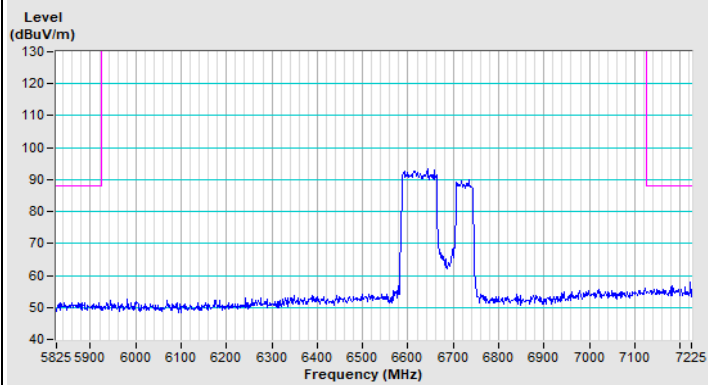


Horizontal (Peak)

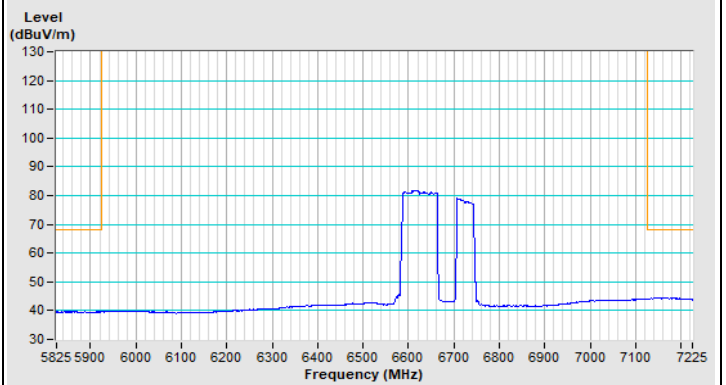

Horizontal (Average)

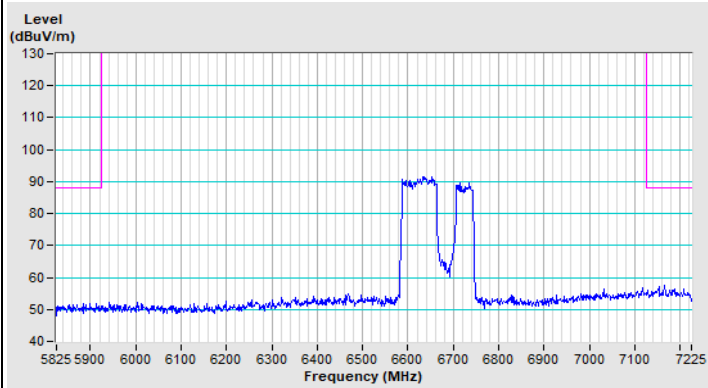


Vertical (Peak)

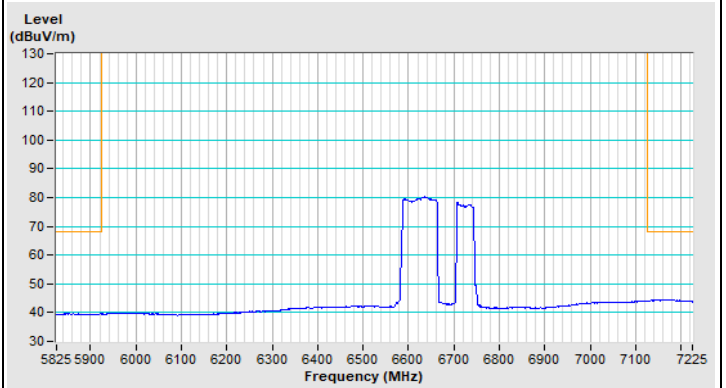


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

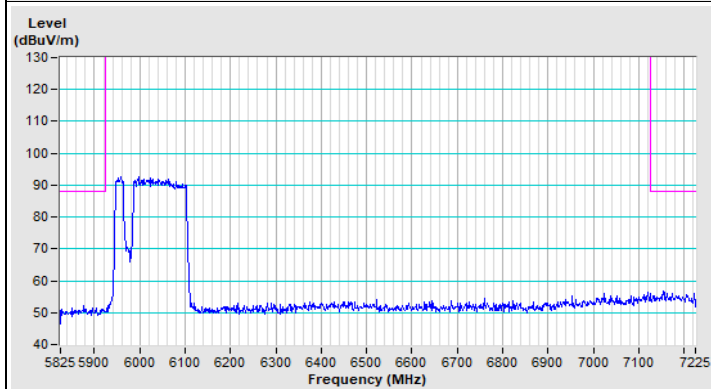


Horizontal (Peak)

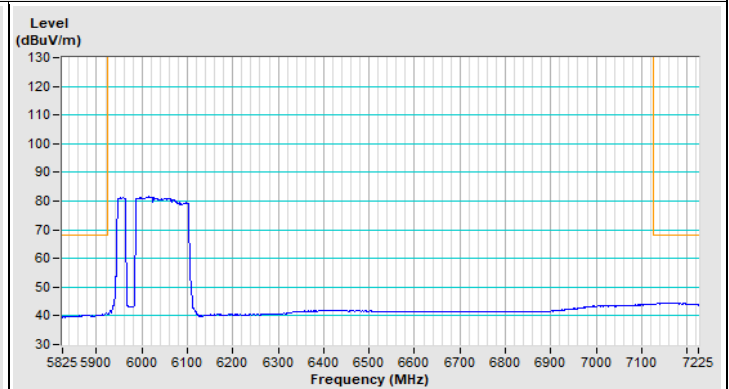

Horizontal (Average)

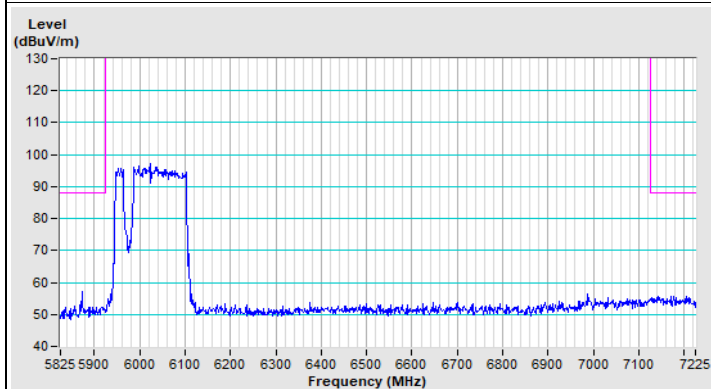


Vertical (Peak)

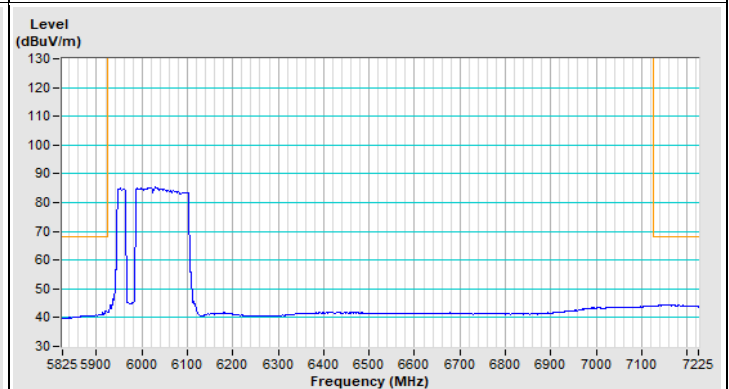


Vertical (Average)


802.11be (EHT160) 996+484+242-tone MRU Channel 143

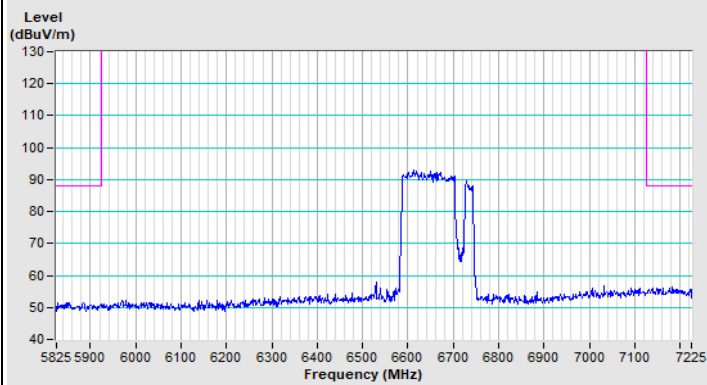


Horizontal (Peak)

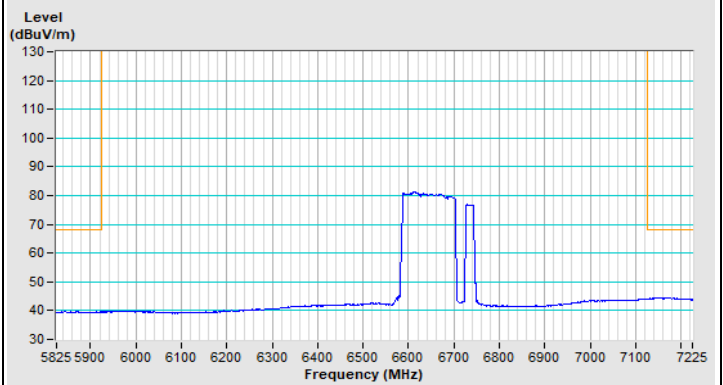

Horizontal (Average)

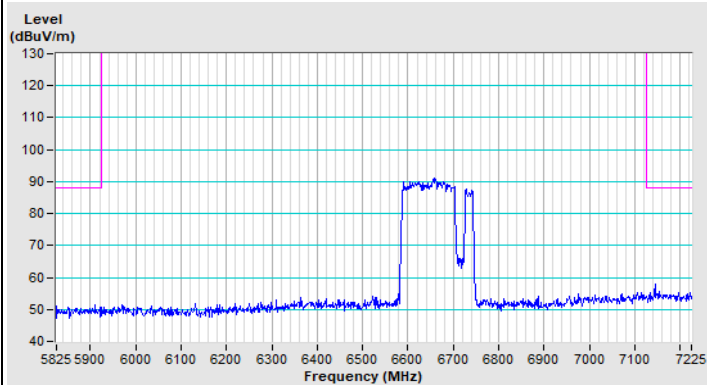

Vertical (Peak)

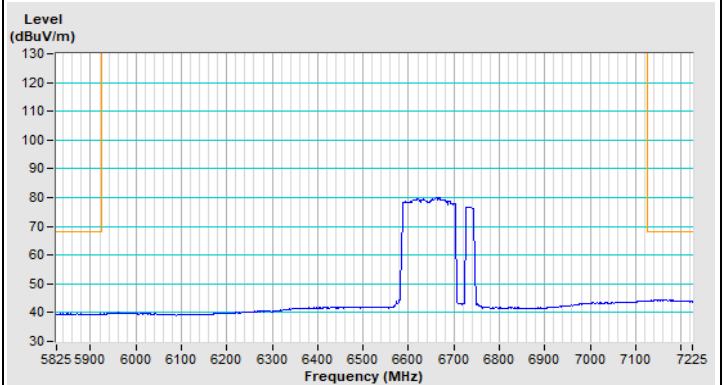

Vertical (Average)


Mode C_1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	1.00 H	221	46.4	5.6
2	#5925.00	40.9 AV	68.2	-27.3	1.00 H	221	35.3	5.6
3	*5955.00	82.7 PK			1.00 H	221	77.2	5.5
4	*5955.00	74.3 AV			1.00 H	221	68.8	5.5
5	11910.00	48.0 PK	74.0	-26.0	1.69 H	264	33.4	14.6
6	11910.00	37.2 AV	54.0	-16.8	1.69 H	264	22.6	14.6
7	17865.00	48.9 PK	74.0	-25.1	2.58 H	144	23.0	25.9
8	17865.00	37.6 AV	54.0	-16.4	2.58 H	144	11.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

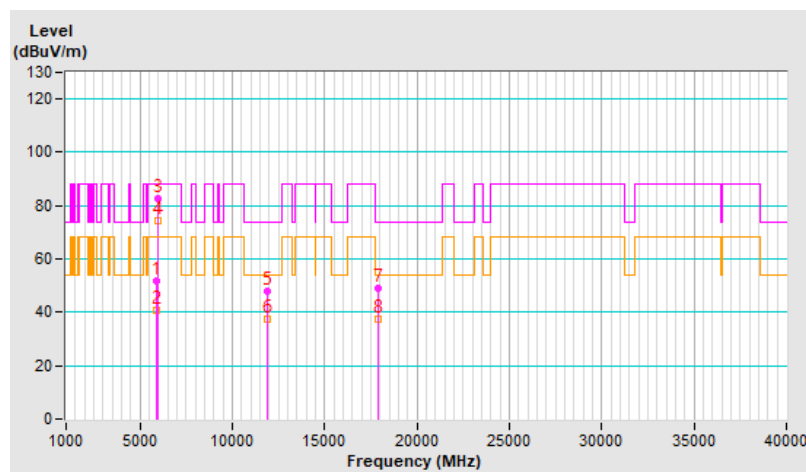


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.84 V	253	46.3	5.6
2	#5925.00	51.9 AV	68.2	-16.3	1.84 V	253	46.3	5.6
3	*5955.00	95.7 PK			1.84 V	253	90.2	5.5
4	*5955.00	86.4 AV			1.84 V	253	80.9	5.5
5	11910.00	46.4 PK	74.0	-27.6	1.77 V	277	31.8	14.6
6	11910.00	36.1 AV	54.0	-17.9	1.77 V	277	21.5	14.6
7	17865.00	49.7 PK	74.0	-24.3	2.58 V	183	23.8	25.9
8	17865.00	38.2 AV	54.0	-15.8	2.58 V	183	12.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

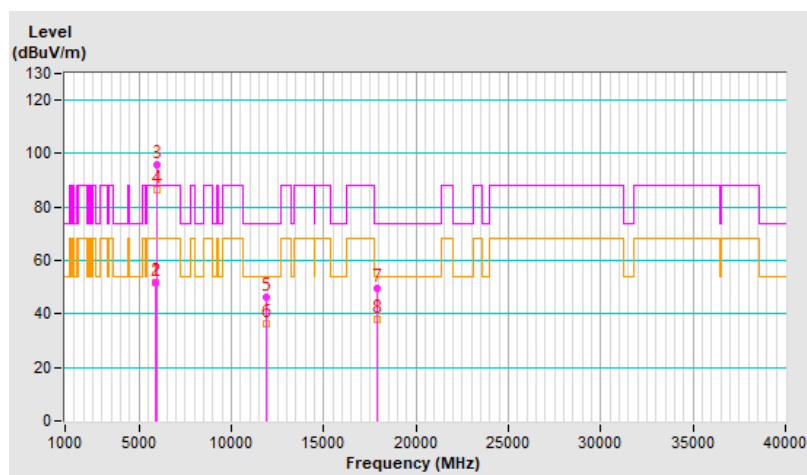


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	82.7 PK			1.00 H	217	76.9	5.8
2	*6195.00	74.2 AV			1.00 H	217	68.4	5.8
3	12390.00	47.5 PK	74.0	-26.5	1.79 H	282	32.8	14.7
4	12390.00	37.1 AV	54.0	-16.9	1.79 H	282	22.4	14.7
5	18585.00	49.5 PK	74.0	-24.5	2.62 H	146	55.0	-5.5
6	18585.00	38.1 AV	54.0	-15.9	2.62 H	146	43.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

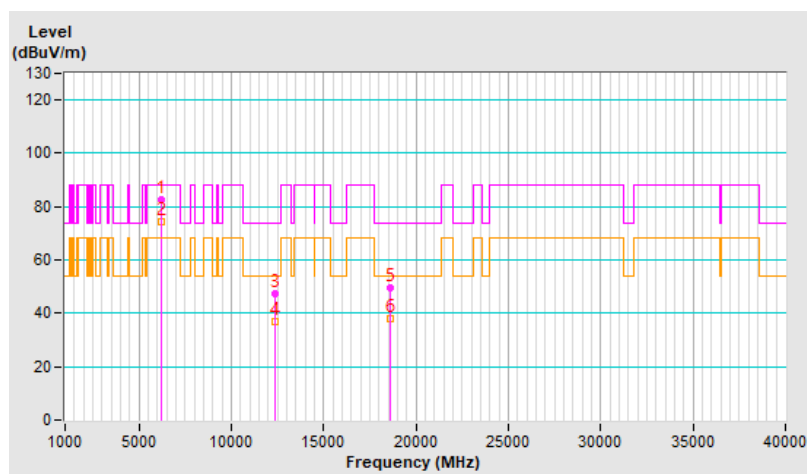


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.9 PK			1.87 V	255	90.1	5.8
2	*6195.00	86.6 AV			1.87 V	255	80.8	5.8
3	12390.00	47.1 PK	74.0	-26.9	1.77 V	280	32.4	14.7
4	12390.00	36.6 AV	54.0	-17.4	1.77 V	280	21.9	14.7
5	18585.00	50.3 PK	74.0	-23.7	2.59 V	171	55.8	-5.5
6	18585.00	39.0 AV	54.0	-15.0	2.59 V	171	44.5	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

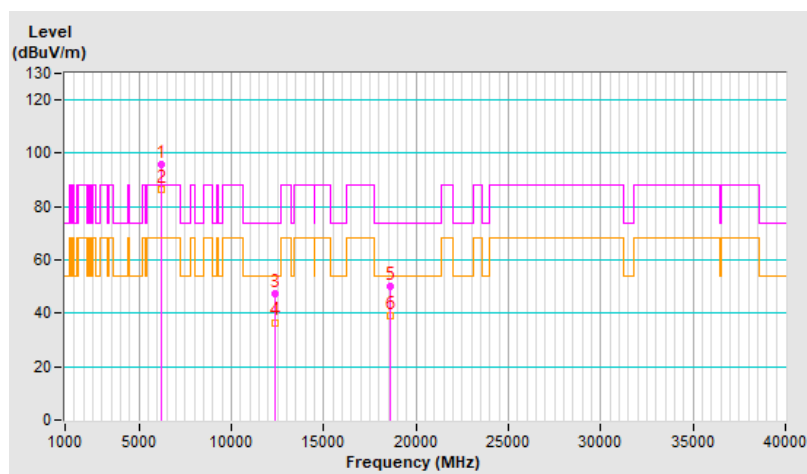


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	82.6 PK			1.06 H	226	75.8	6.8
2	*6415.00	74.3 AV			1.06 H	226	67.5	6.8
3	#12830.00	47.8 PK	88.2	-40.4	1.78 H	285	32.7	15.1
4	#12830.00	37.1 AV	68.2	-31.1	1.78 H	285	22.0	15.1
5	19245.00	49.5 PK	74.0	-24.5	2.63 H	156	54.1	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.63 H	156	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

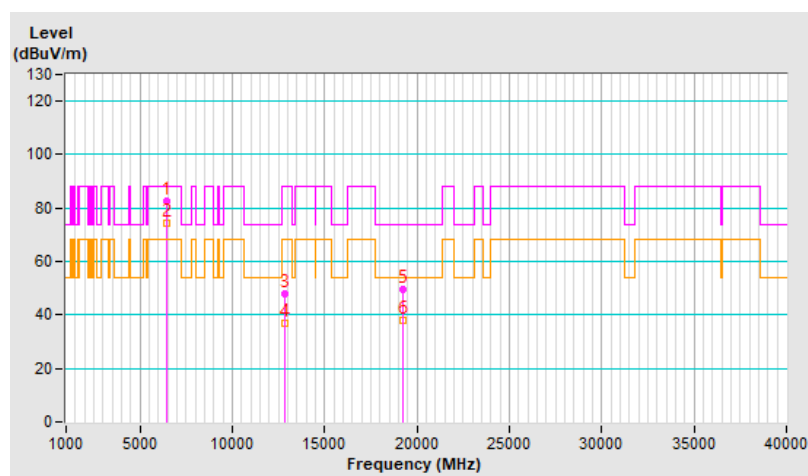


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.4 PK			1.81 V	268	88.6	6.8
2	*6415.00	85.9 AV			1.81 V	268	79.1	6.8
3	#12830.00	46.3 PK	88.2	-41.9	1.84 V	265	31.2	15.1
4	#12830.00	35.9 AV	68.2	-32.3	1.84 V	265	20.8	15.1
5	19245.00	49.7 PK	74.0	-24.3	2.59 V	176	54.3	-4.6
6	19245.00	38.6 AV	54.0	-15.4	2.59 V	176	43.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

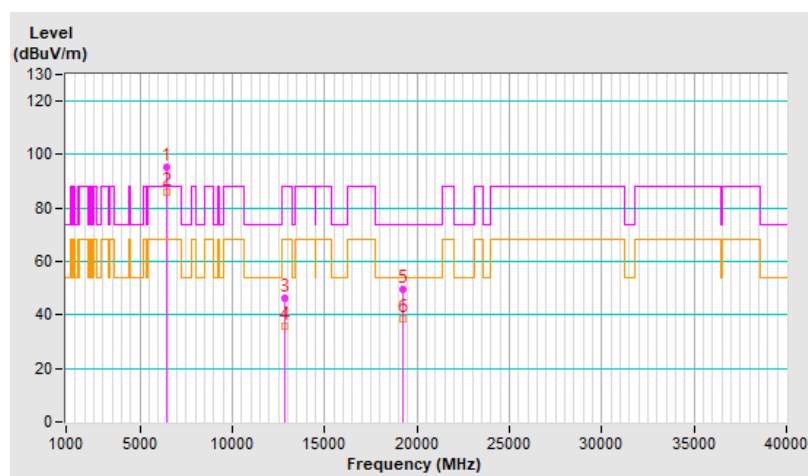


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	82.4 PK			1.04 H	205	75.0	7.4
2	*6535.00	74.2 AV			1.04 H	205	66.8	7.4
3	#13070.00	47.2 PK	88.2	-41.0	1.76 H	268	32.1	15.1
4	#13070.00	36.7 AV	68.2	-31.5	1.76 H	268	21.6	15.1
5	19605.00	49.3 PK	74.0	-24.7	2.56 H	151	54.1	-4.8
6	19605.00	38.1 AV	54.0	-15.9	2.56 H	151	42.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

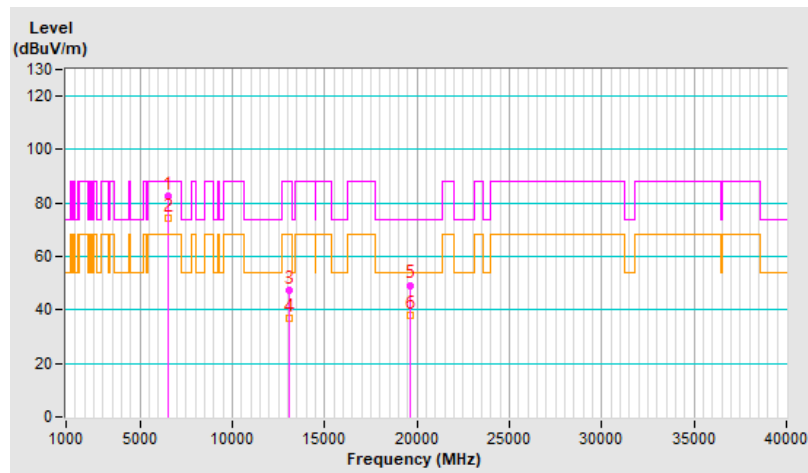


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.5 PK			1.81 V	259	88.1	7.4
2	*6535.00	86.2 AV			1.81 V	259	78.8	7.4
3	#13070.00	46.4 PK	88.2	-41.8	1.81 V	273	31.3	15.1
4	#13070.00	36.1 AV	68.2	-32.1	1.81 V	273	21.0	15.1
5	19605.00	50.2 PK	74.0	-23.8	2.62 V	179	55.0	-4.8
6	19605.00	38.9 AV	54.0	-15.1	2.62 V	179	43.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

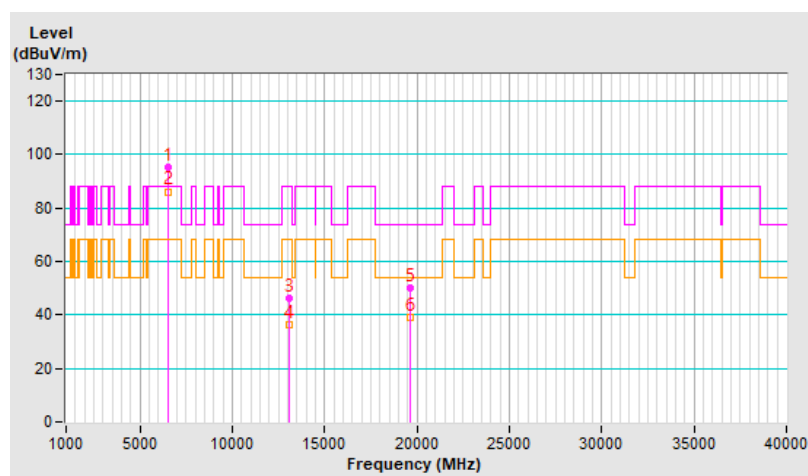


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	81.8 PK			1.00 H	214	74.1	7.7
2	*6695.00	73.9 AV			1.00 H	214	66.2	7.7
3	13390.00	46.9 PK	74.0	-27.1	1.78 H	275	31.5	15.4
4	13390.00	36.4 AV	54.0	-17.6	1.78 H	275	21.0	15.4
5	20085.00	49.1 PK	74.0	-24.9	2.65 H	154	53.4	-4.3
6	20085.00	37.9 AV	54.0	-16.1	2.65 H	154	42.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

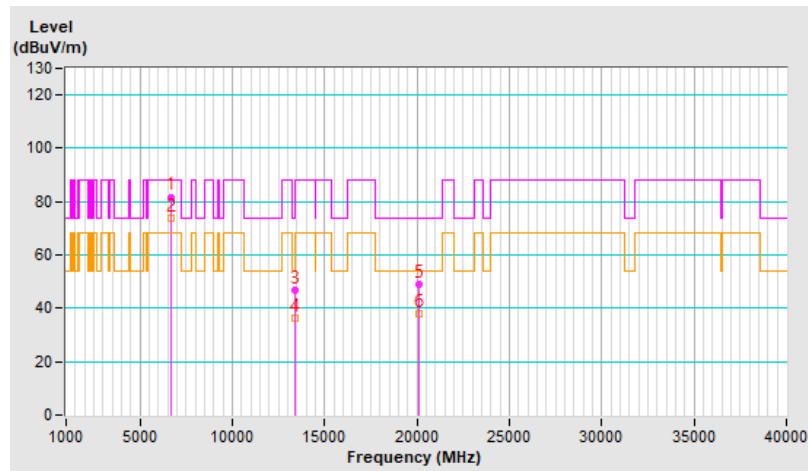


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.2 PK			1.83 V	265	87.5	7.7
2	*6695.00	86.2 AV			1.83 V	265	78.5	7.7
3	13390.00	46.4 PK	74.0	-27.6	1.80 V	264	31.0	15.4
4	13390.00	36.0 AV	54.0	-18.0	1.80 V	264	20.6	15.4
5	20085.00	49.9 PK	74.0	-24.1	2.58 V	153	54.2	-4.3
6	20085.00	38.4 AV	54.0	-15.6	2.58 V	153	42.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

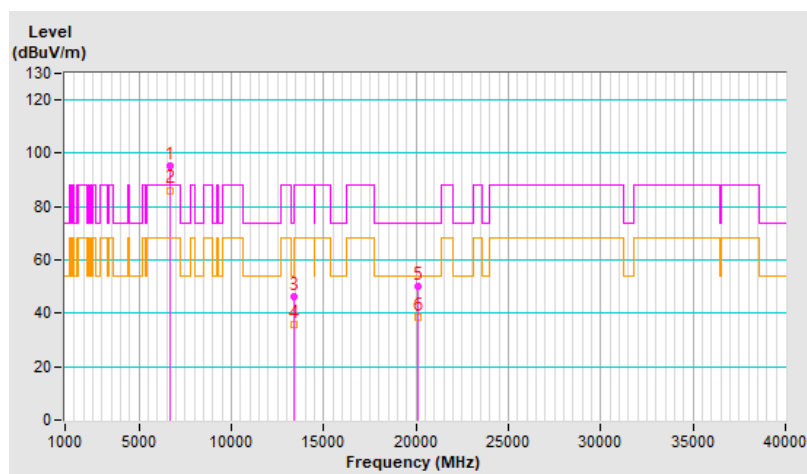


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	85.1 PK			1.08 H	223	76.9	8.2
2	*6855.00	76.0 AV			1.08 H	223	67.8	8.2
3	#13710.00	46.9 PK	88.2	-41.3	1.68 H	270	30.6	16.3
4	#13710.00	36.4 AV	68.2	-31.8	1.68 H	270	20.1	16.3
5	20565.00	49.0 PK	74.0	-25.0	2.65 H	161	52.7	-3.7
6	20565.00	38.0 AV	54.0	-16.0	2.65 H	161	41.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

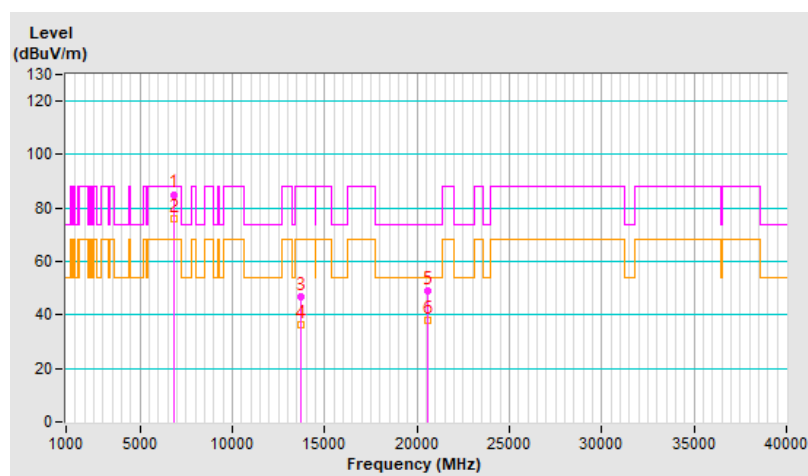


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.3 PK			1.17 V	88	87.1	8.2
2	*6855.00	86.2 AV			1.17 V	88	78.0	8.2
3	#13710.00	46.5 PK	88.2	-41.7	1.74 V	283	30.2	16.3
4	#13710.00	36.0 AV	68.2	-32.2	1.74 V	283	19.7	16.3
5	20565.00	49.8 PK	74.0	-24.2	2.60 V	172	53.5	-3.7
6	20565.00	38.3 AV	54.0	-15.7	2.60 V	172	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

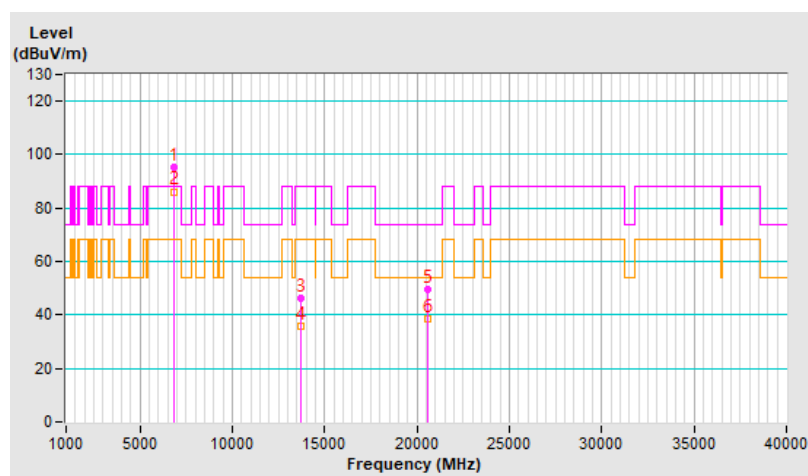


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.00 H	222	46.1	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.00 H	222	34.2	5.6
3	*5955.00	83.7 PK			1.00 H	222	78.2	5.5
4	*5955.00	74.3 AV			1.00 H	222	68.8	5.5
5	11910.00	47.6 PK	74.0	-26.4	1.71 H	262	33.0	14.6
6	11910.00	37.2 AV	54.0	-16.8	1.71 H	262	22.6	14.6
7	17865.00	49.2 PK	74.0	-24.8	2.57 H	156	23.3	25.9
8	17865.00	38.2 AV	54.0	-15.8	2.57 H	156	12.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

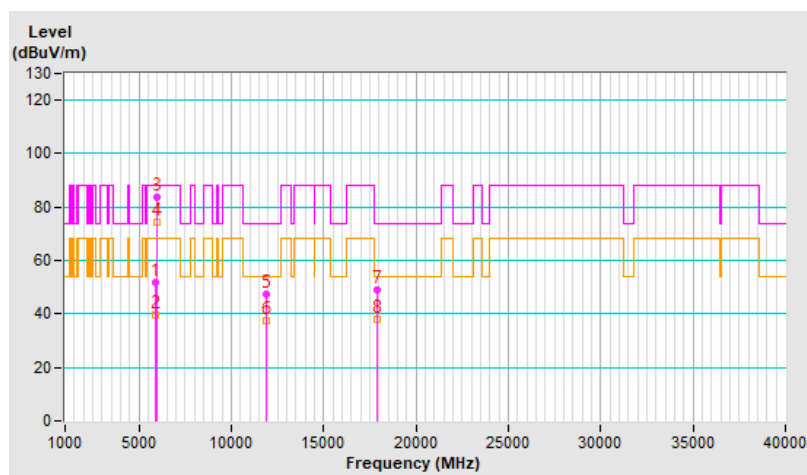


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.88 V	281	46.1	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.88 V	281	33.8	5.6
3	*5955.00	97.2 PK			1.88 V	281	91.7	5.5
4	*5955.00	85.9 AV			1.88 V	281	80.4	5.5
5	11910.00	46.6 PK	74.0	-27.4	1.76 V	276	32.0	14.6
6	11910.00	36.4 AV	54.0	-17.6	1.76 V	276	21.8	14.6
7	17865.00	50.2 PK	74.0	-23.8	2.58 V	152	24.3	25.9
8	17865.00	38.8 AV	54.0	-15.2	2.58 V	152	12.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

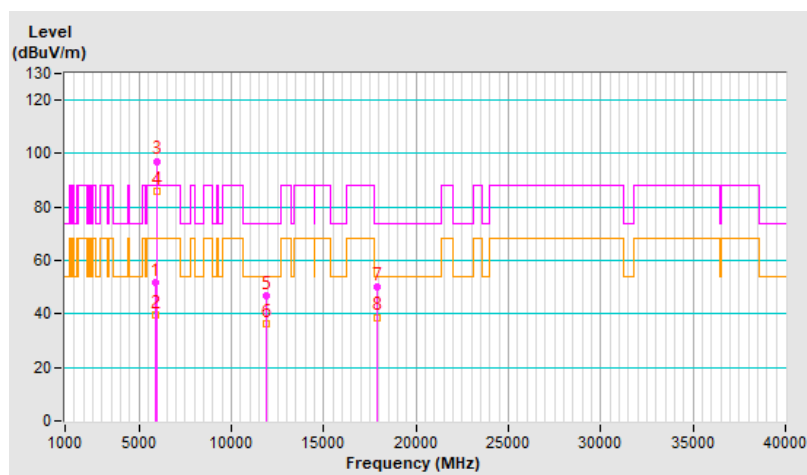


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	83.7 PK			1.00 H	231	77.9	5.8
2	*6195.00	74.2 AV			1.00 H	231	68.4	5.8
3	12390.00	47.5 PK	74.0	-26.5	1.72 H	274	32.8	14.7
4	12390.00	36.6 AV	54.0	-17.4	1.72 H	274	21.9	14.7
5	18585.00	49.0 PK	74.0	-25.0	2.61 H	164	54.5	-5.5
6	18585.00	37.8 AV	54.0	-16.2	2.61 H	164	43.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

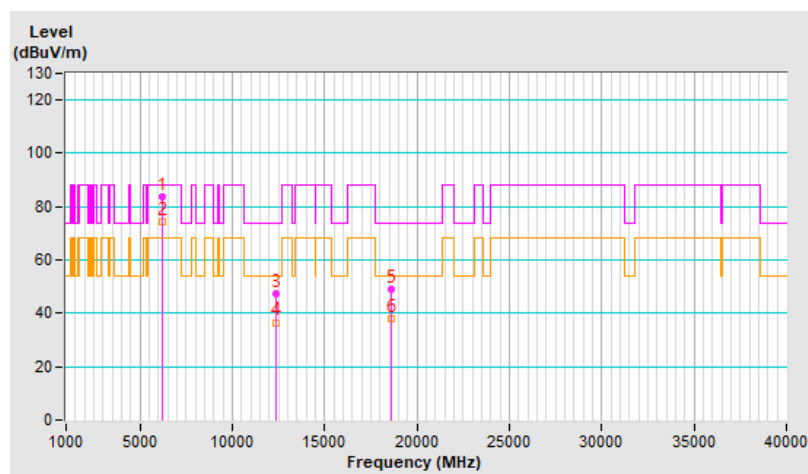


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	97.6 PK			1.92 V	273	91.8	5.8
2	*6195.00	86.1 AV			1.92 V	273	80.3	5.8
3	12390.00	46.4 PK	74.0	-27.6	1.83 V	269	31.7	14.7
4	12390.00	36.3 AV	54.0	-17.7	1.83 V	269	21.6	14.7
5	18585.00	49.7 PK	74.0	-24.3	2.62 V	166	55.2	-5.5
6	18585.00	38.5 AV	54.0	-15.5	2.62 V	166	44.0	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

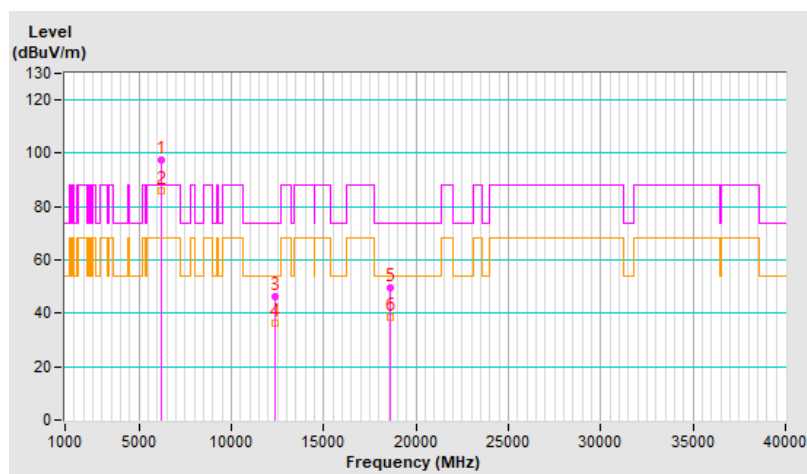


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	83.4 PK			1.00 H	243	76.6	6.8
2	*6415.00	74.1 AV			1.00 H	243	67.3	6.8
3	#12830.00	46.9 PK	88.2	-41.3	1.79 H	272	31.8	15.1
4	#12830.00	36.3 AV	68.2	-31.9	1.79 H	272	21.2	15.1
5	19245.00	49.6 PK	74.0	-24.4	2.54 H	141	54.2	-4.6
6	19245.00	38.6 AV	54.0	-15.4	2.54 H	141	43.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

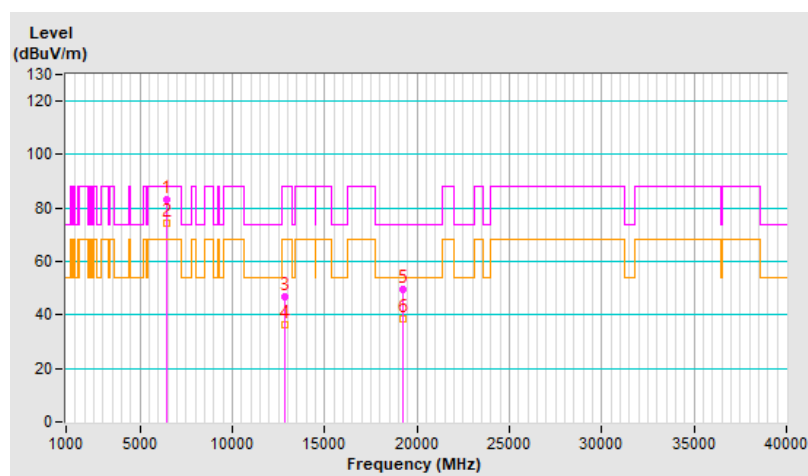


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	97.7 PK			1.83 V	295	90.9	6.8
2	*6415.00	86.4 AV			1.83 V	295	79.6	6.8
3	#12830.00	46.4 PK	88.2	-41.8	1.74 V	290	31.3	15.1
4	#12830.00	36.1 AV	68.2	-32.1	1.74 V	290	21.0	15.1
5	19245.00	50.1 PK	74.0	-23.9	2.63 V	165	54.7	-4.6
6	19245.00	38.7 AV	54.0	-15.3	2.63 V	165	43.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

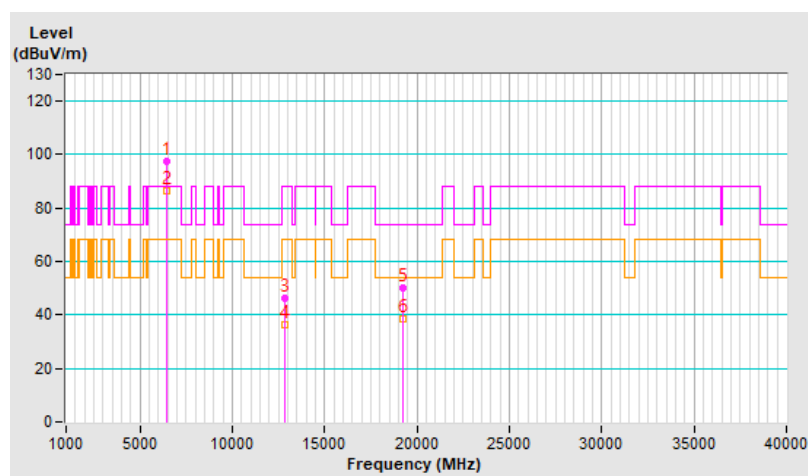


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	84.3 PK			1.00 H	238	76.9	7.4
2	*6535.00	74.6 AV			1.00 H	238	67.2	7.4
3	#13070.00	47.5 PK	88.2	-40.7	1.72 H	292	32.4	15.1
4	#13070.00	36.8 AV	68.2	-31.4	1.72 H	292	21.7	15.1
5	19605.00	48.6 PK	74.0	-25.4	2.58 H	137	53.4	-4.8
6	19605.00	37.7 AV	54.0	-16.3	2.58 H	137	42.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

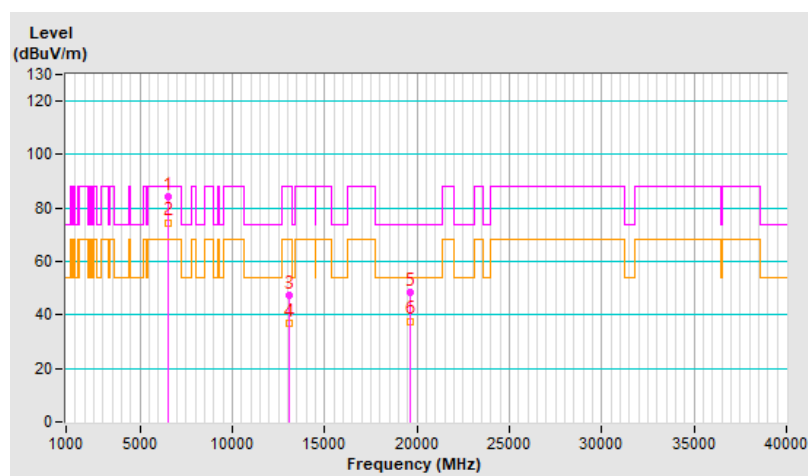


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.4 PK			1.94 V	280	90.0	7.4
2	*6535.00	86.3 AV			1.94 V	280	78.9	7.4
3	#13070.00	46.8 PK	88.2	-41.4	1.81 V	265	31.7	15.1
4	#13070.00	36.3 AV	68.2	-31.9	1.81 V	265	21.2	15.1
5	19605.00	49.7 PK	74.0	-24.3	2.64 V	164	54.5	-4.8
6	19605.00	38.4 AV	54.0	-15.6	2.64 V	164	43.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

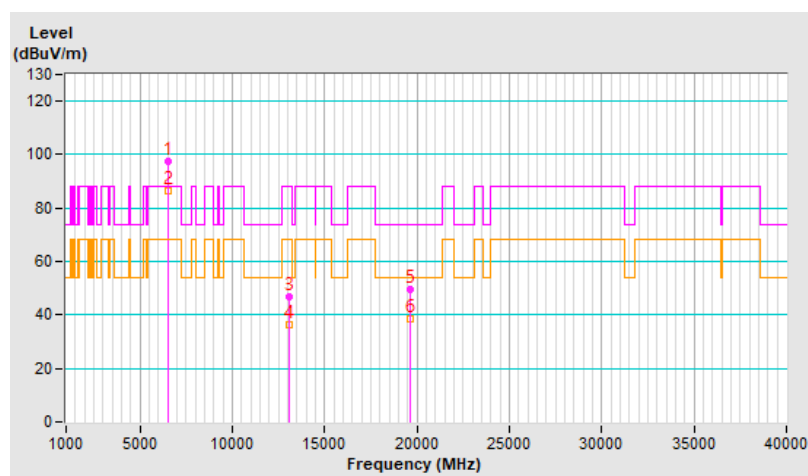


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	83.8 PK			1.00 H	242	76.1	7.7
2	*6695.00	74.6 AV			1.00 H	242	66.9	7.7
3	13390.00	47.2 PK	74.0	-26.8	1.75 H	270	31.8	15.4
4	13390.00	36.7 AV	54.0	-17.3	1.75 H	270	21.3	15.4
5	20085.00	49.9 PK	74.0	-24.1	2.66 H	161	54.2	-4.3
6	20085.00	38.5 AV	54.0	-15.5	2.66 H	161	42.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

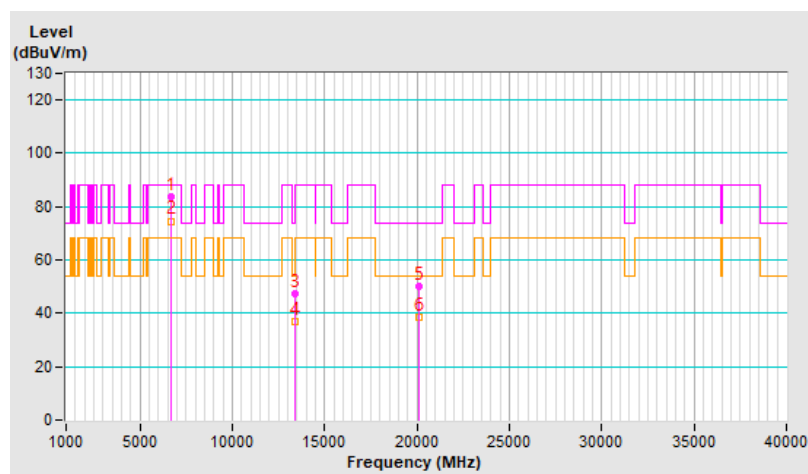


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	97.8 PK			1.94 V	281	90.1	7.7
2	*6695.00	86.4 AV			1.94 V	281	78.7	7.7
3	13390.00	46.8 PK	74.0	-27.2	1.82 V	290	31.4	15.4
4	13390.00	36.4 AV	54.0	-17.6	1.82 V	290	21.0	15.4
5	20085.00	49.7 PK	74.0	-24.3	2.57 V	168	54.0	-4.3
6	20085.00	38.4 AV	54.0	-15.6	2.57 V	168	42.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

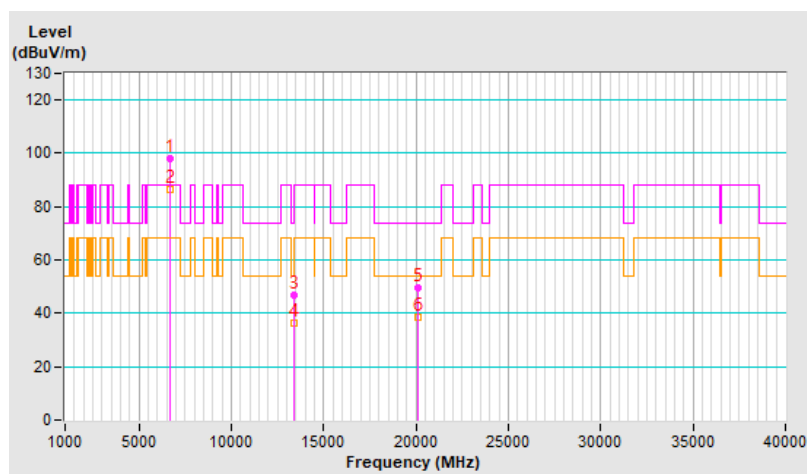


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	85.1 PK			1.00 H	222	76.9	8.2
2	*6855.00	75.5 AV			1.00 H	222	67.3	8.2
3	#13710.00	46.9 PK	88.2	-41.3	1.68 H	288	30.6	16.3
4	#13710.00	36.4 AV	68.2	-31.8	1.68 H	288	20.1	16.3
5	20565.00	49.5 PK	74.0	-24.5	2.59 H	159	53.2	-3.7
6	20565.00	38.3 AV	54.0	-15.7	2.59 H	159	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

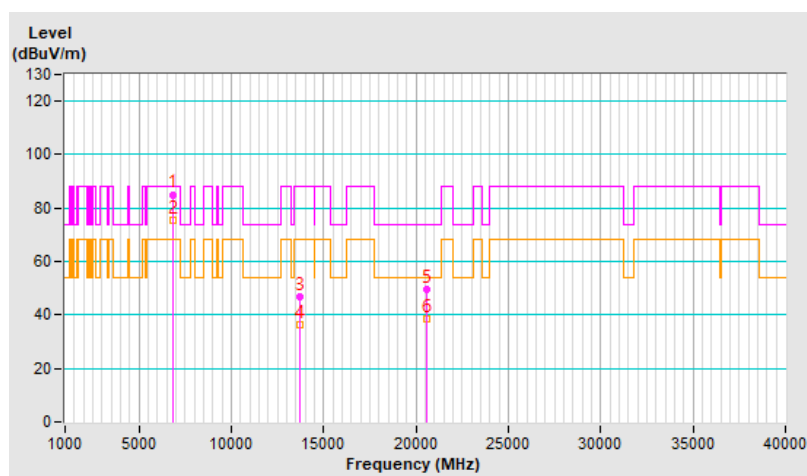


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	98.6 PK			1.15 V	88	90.4	8.2
2	*6855.00	86.8 AV			1.15 V	88	78.6	8.2
3	#13710.00	46.6 PK	88.2	-41.6	1.79 V	285	30.3	16.3
4	#13710.00	36.5 AV	68.2	-31.7	1.79 V	285	20.2	16.3
5	20565.00	49.8 PK	74.0	-24.2	2.64 V	153	53.5	-3.7
6	20565.00	38.4 AV	54.0	-15.6	2.64 V	153	42.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

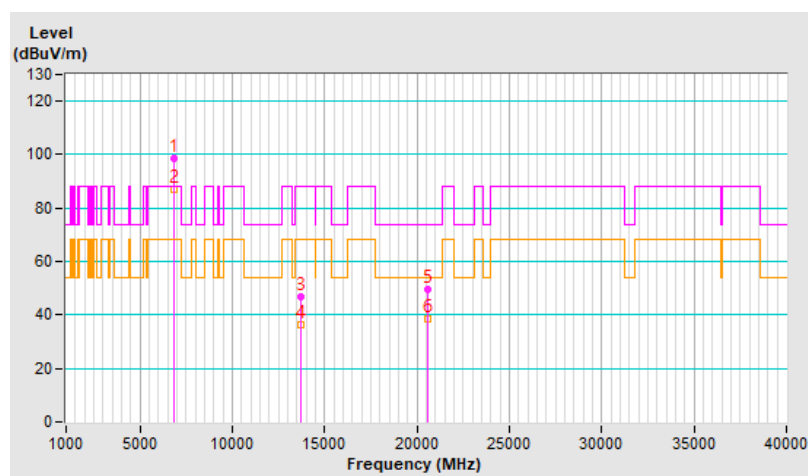


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.29 H	219	46.0	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.29 H	219	34.1	5.6
3	*5965.00	86.5 PK			1.29 H	219	81.0	5.5
4	*5965.00	74.0 AV			1.29 H	219	68.5	5.5
5	11930.00	48.0 PK	74.0	-26.0	1.73 H	292	33.5	14.5
6	11930.00	37.2 AV	54.0	-16.8	1.73 H	292	22.7	14.5
7	17895.00	49.5 PK	74.0	-24.5	2.56 H	167	23.1	26.4
8	17895.00	38.5 AV	54.0	-15.5	2.56 H	167	12.1	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

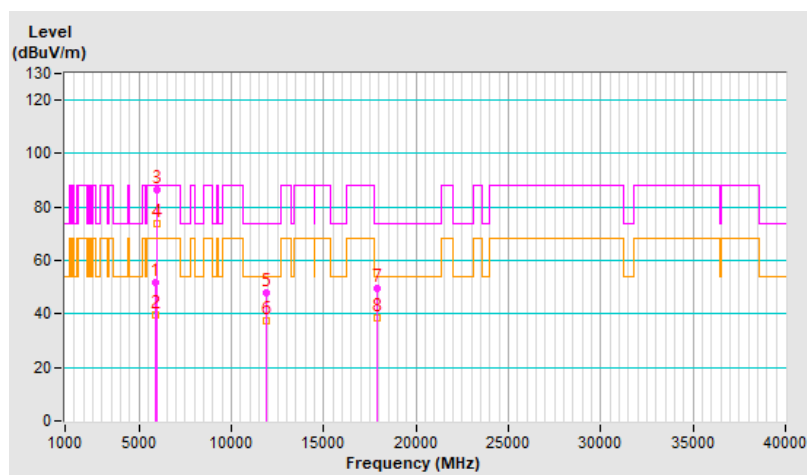


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.87 V	254	46.1	5.6
2	#5925.00	51.1 AV	68.2	-17.1	1.87 V	254	45.5	5.6
3	*5965.00	96.9 PK			1.87 V	254	91.4	5.5
4	*5965.00	85.7 AV			1.87 V	254	80.2	5.5
5	11930.00	46.4 PK	74.0	-27.6	1.84 V	267	31.9	14.5
6	11930.00	36.0 AV	54.0	-18.0	1.84 V	267	21.5	14.5
7	17895.00	49.3 PK	74.0	-24.7	2.62 V	173	22.9	26.4
8	17895.00	38.2 AV	54.0	-15.8	2.62 V	173	11.8	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

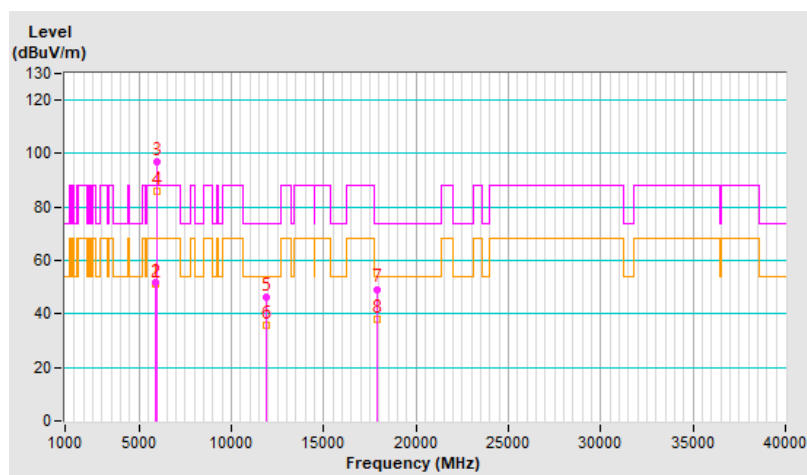


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	86.6 PK			1.27 H	228	80.7	5.9
2	*6205.00	74.0 AV			1.27 H	228	68.1	5.9
3	12410.00	47.5 PK	74.0	-26.5	1.70 H	270	32.8	14.7
4	12410.00	36.6 AV	54.0	-17.4	1.70 H	270	21.9	14.7
5	18615.00	49.6 PK	74.0	-24.4	2.65 H	160	55.0	-5.4
6	18615.00	38.5 AV	54.0	-15.5	2.65 H	160	43.9	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

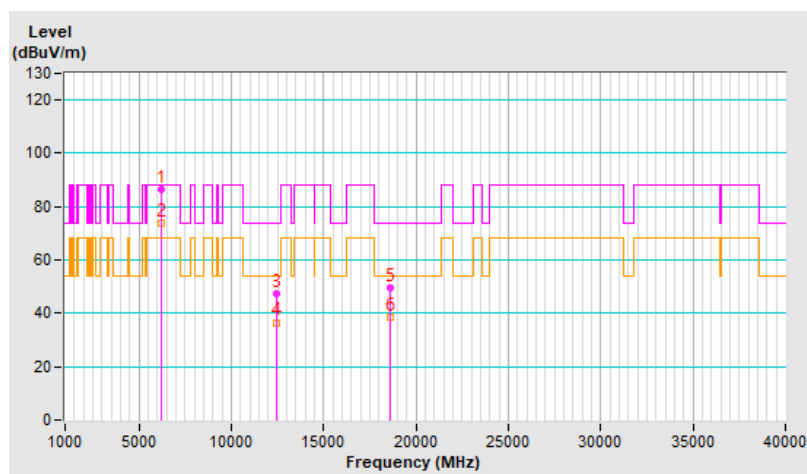


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	96.7 PK			1.86 V	250	90.8	5.9
2	*6205.00	85.3 AV			1.86 V	250	79.4	5.9
3	12410.00	45.7 PK	74.0	-28.3	1.74 V	290	31.0	14.7
4	12410.00	35.7 AV	54.0	-18.3	1.74 V	290	21.0	14.7
5	18615.00	50.5 PK	74.0	-23.5	2.63 V	153	55.9	-5.4
6	18615.00	38.9 AV	54.0	-15.1	2.63 V	153	44.3	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

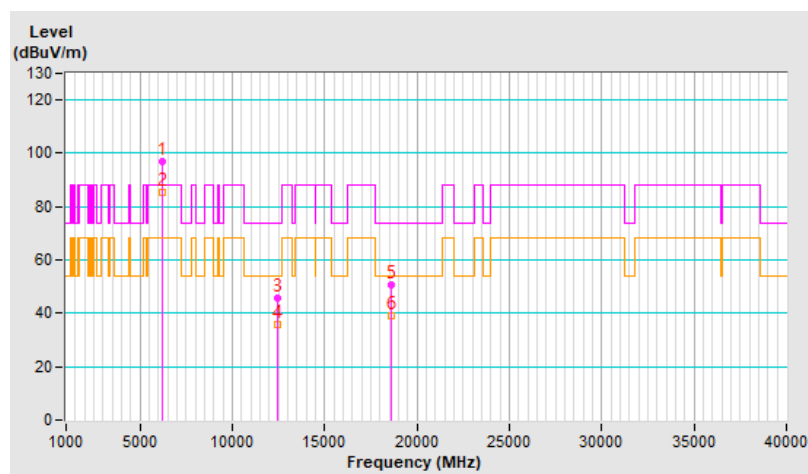


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	86.8 PK			1.33 H	213	80.1	6.7
2	*6405.00	74.3 AV			1.33 H	213	67.6	6.7
3	#12810.00	47.4 PK	88.2	-40.8	1.71 H	277	32.3	15.1
4	#12810.00	36.8 AV	68.2	-31.4	1.71 H	277	21.7	15.1
5	19215.00	49.8 PK	74.0	-24.2	2.64 H	137	54.5	-4.7
6	19215.00	38.5 AV	54.0	-15.5	2.64 H	137	43.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

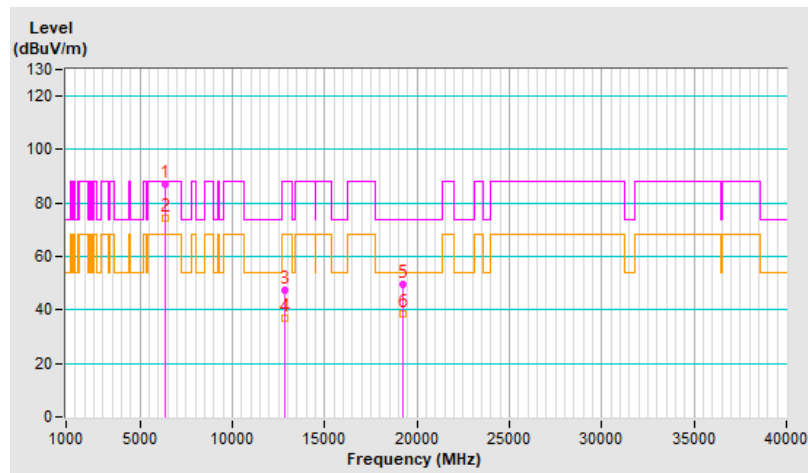


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	97.3 PK			1.88 V	239	90.6	6.7
2	*6405.00	86.1 AV			1.88 V	239	79.4	6.7
3	#12810.00	45.9 PK	88.2	-42.3	1.76 V	264	30.8	15.1
4	#12810.00	35.8 AV	68.2	-32.4	1.76 V	264	20.7	15.1
5	19215.00	49.6 PK	74.0	-24.4	2.65 V	164	54.3	-4.7
6	19215.00	38.1 AV	54.0	-15.9	2.65 V	164	42.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

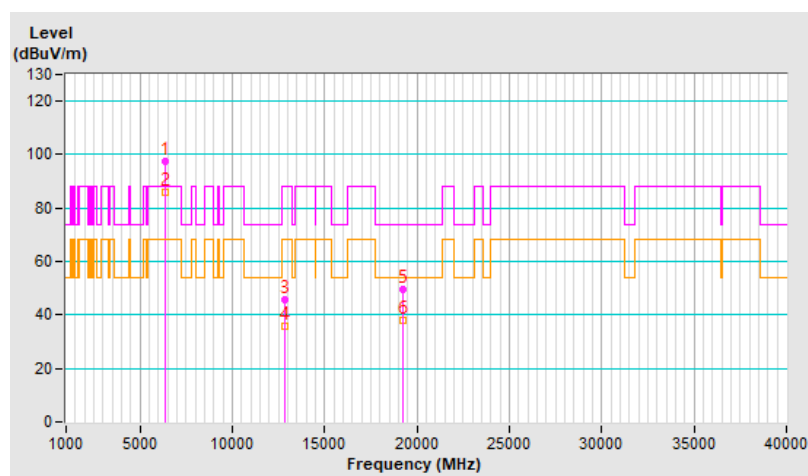


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	86.9 PK			1.34 H	205	79.4	7.5
2	*6565.00	74.4 AV			1.34 H	205	66.9	7.5
3	#13130.00	46.9 PK	88.2	-41.3	1.74 H	286	31.6	15.3
4	#13130.00	36.4 AV	68.2	-31.8	1.74 H	286	21.1	15.3
5	19695.00	50.0 PK	74.0	-24.0	2.62 H	138	54.4	-4.4
6	19695.00	38.5 AV	54.0	-15.5	2.62 H	138	42.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

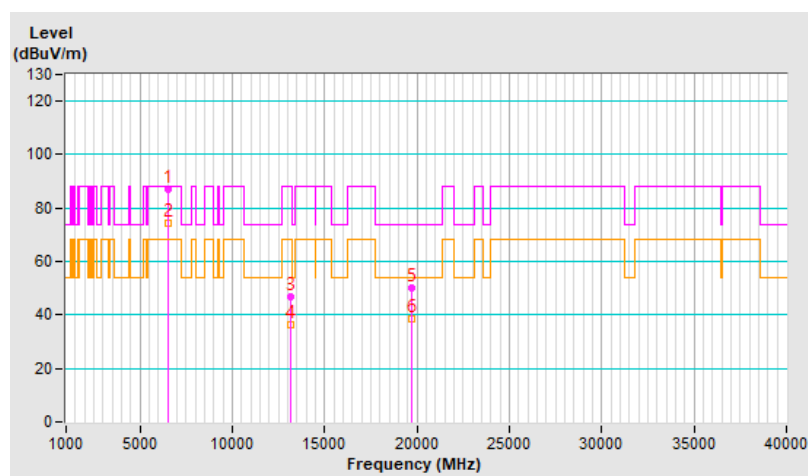


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	97.2 PK			1.89 V	239	89.7	7.5
2	*6565.00	86.1 AV			1.89 V	239	78.6	7.5
3	#13130.00	46.8 PK	88.2	-41.4	1.74 V	292	31.5	15.3
4	#13130.00	36.6 AV	68.2	-31.6	1.74 V	292	21.3	15.3
5	19695.00	50.3 PK	74.0	-23.7	2.56 V	164	54.7	-4.4
6	19695.00	38.9 AV	54.0	-15.1	2.56 V	164	43.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

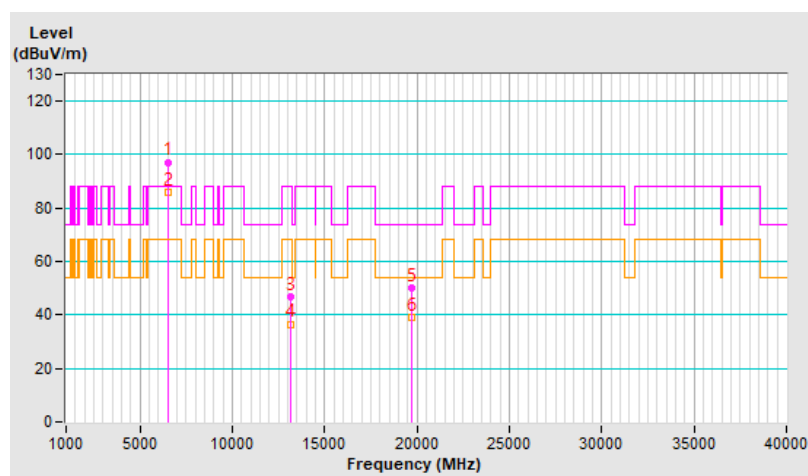


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	86.8 PK			1.32 H	233	79.1	7.7
2	*6685.00	74.2 AV			1.32 H	233	66.5	7.7
3	13370.00	46.9 PK	74.0	-27.1	1.71 H	279	31.6	15.3
4	13370.00	36.4 AV	54.0	-17.6	1.71 H	279	21.1	15.3
5	20055.00	49.4 PK	74.0	-24.6	2.65 H	165	53.8	-4.4
6	20055.00	38.0 AV	54.0	-16.0	2.65 H	165	42.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

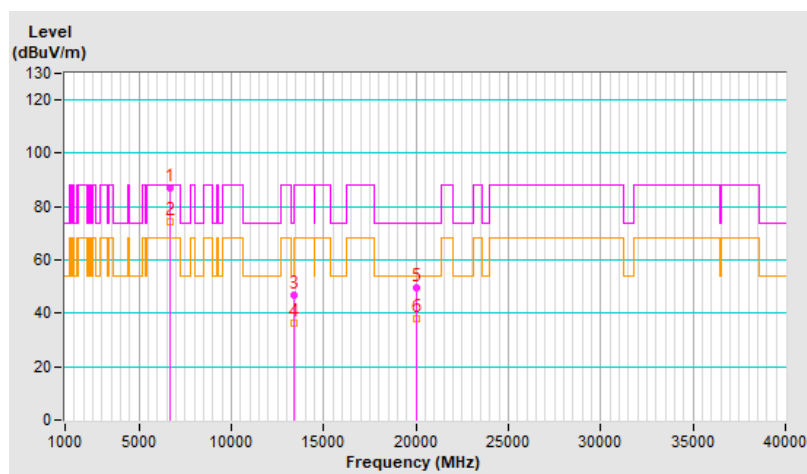


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	96.9 PK			1.85 V	265	89.2	7.7
2	*6685.00	85.9 AV			1.85 V	265	78.2	7.7
3	13370.00	45.8 PK	74.0	-28.2	1.74 V	268	30.5	15.3
4	13370.00	35.7 AV	54.0	-18.3	1.74 V	268	20.4	15.3
5	20055.00	49.6 PK	74.0	-24.4	2.59 V	155	54.0	-4.4
6	20055.00	38.5 AV	54.0	-15.5	2.59 V	155	42.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

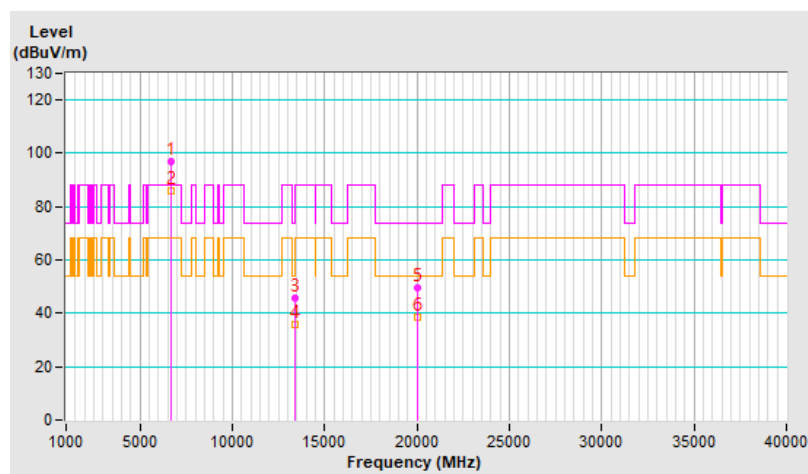


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	87.9 PK			1.03 H	225	79.7	8.2
2	*6845.00	77.2 AV			1.03 H	225	69.0	8.2
3	#13690.00	47.0 PK	88.2	-41.2	1.74 H	293	30.7	16.3
4	#13690.00	36.5 AV	68.2	-31.7	1.74 H	293	20.2	16.3
5	20535.00	49.9 PK	74.0	-24.1	2.59 H	165	53.6	-3.7
6	20535.00	38.5 AV	54.0	-15.5	2.59 H	165	42.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

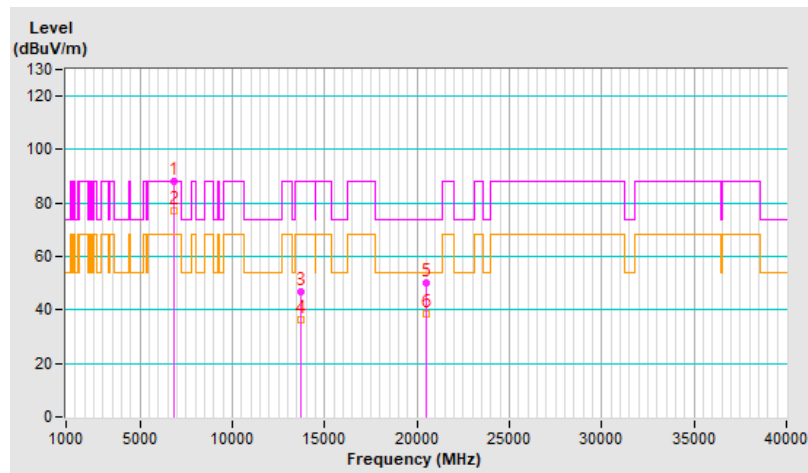


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	100.6 PK			1.98 V	275	92.4	8.2
2	*6845.00	88.3 AV			1.98 V	275	80.1	8.2
3	#13690.00	46.3 PK	88.2	-41.9	1.74 V	266	30.0	16.3
4	#13690.00	36.3 AV	68.2	-31.9	1.74 V	266	20.0	16.3
5	20535.00	50.0 PK	74.0	-24.0	2.65 V	157	53.7	-3.7
6	20535.00	38.3 AV	54.0	-15.7	2.65 V	157	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

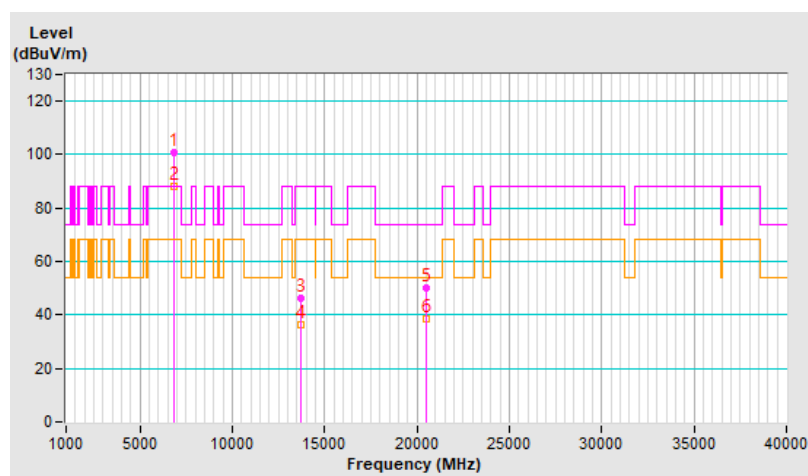


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	1.00 H	218	46.4	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.00 H	218	34.0	5.6
3	*5985.00	85.1 PK			1.00 H	218	79.6	5.5
4	*5985.00	74.2 AV			1.00 H	218	68.7	5.5
5	11970.00	47.2 PK	74.0	-26.8	1.74 H	278	32.7	14.5
6	11970.00	36.3 AV	54.0	-17.7	1.74 H	278	21.8	14.5
7	17955.00	49.3 PK	74.0	-24.7	2.63 H	164	21.0	28.3
8	17955.00	38.0 AV	54.0	-16.0	2.63 H	164	9.7	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

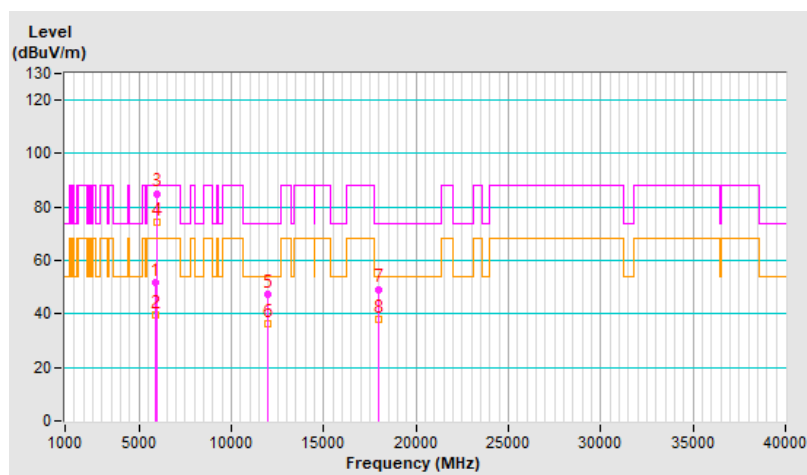


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.92 V	284	46.1	5.6
2	#5925.00	40.6 AV	68.2	-27.6	1.92 V	284	35.0	5.6
3	*5985.00	97.1 PK			1.92 V	284	91.6	5.5
4	*5985.00	85.6 AV			1.92 V	284	80.1	5.5
5	11970.00	46.4 PK	74.0	-27.6	1.78 V	266	31.9	14.5
6	11970.00	35.8 AV	54.0	-18.2	1.78 V	266	21.3	14.5
7	17955.00	50.1 PK	74.0	-23.9	2.60 V	155	21.8	28.3
8	17955.00	38.6 AV	54.0	-15.4	2.60 V	155	10.3	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

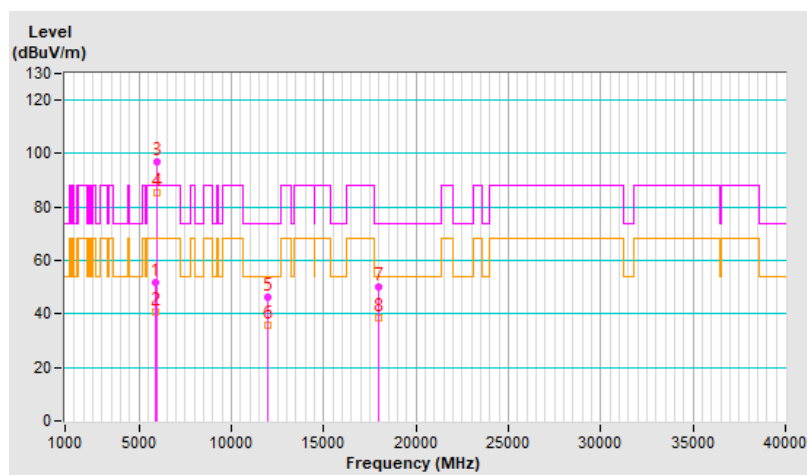


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	84.9 PK			1.00 H	232	79.0	5.9
2	*6225.00	73.8 AV			1.00 H	232	67.9	5.9
3	12450.00	48.0 PK	74.0	-26.0	1.76 H	268	33.4	14.6
4	12450.00	37.1 AV	54.0	-16.9	1.76 H	268	22.5	14.6
5	18675.00	48.8 PK	74.0	-25.2	2.58 H	163	54.1	-5.3
6	18675.00	37.8 AV	54.0	-16.2	2.58 H	163	43.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

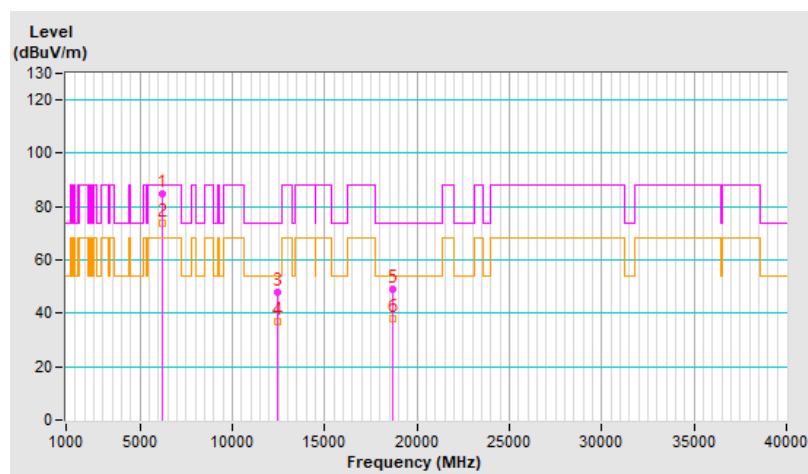


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	97.1 PK			1.97 V	268	91.2	5.9
2	*6225.00	85.9 AV			1.97 V	268	80.0	5.9
3	12450.00	46.7 PK	74.0	-27.3	1.83 V	280	32.1	14.6
4	12450.00	36.2 AV	54.0	-17.8	1.83 V	280	21.6	14.6
5	18675.00	50.2 PK	74.0	-23.8	2.58 V	178	55.5	-5.3
6	18675.00	38.7 AV	54.0	-15.3	2.58 V	178	44.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

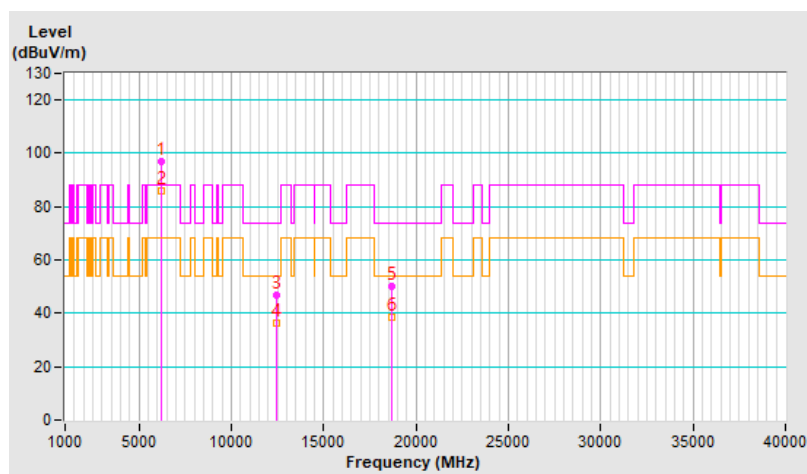


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	85.0 PK			1.00 H	206	78.4	6.6
2	*6385.00	74.0 AV			1.00 H	206	67.4	6.6
3	#12770.00	47.1 PK	88.2	-41.1	1.73 H	291	32.2	14.9
4	#12770.00	36.5 AV	68.2	-31.7	1.73 H	291	21.6	14.9
5	19155.00	49.8 PK	74.0	-24.2	2.57 H	167	54.5	-4.7
6	19155.00	38.4 AV	54.0	-15.6	2.57 H	167	43.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

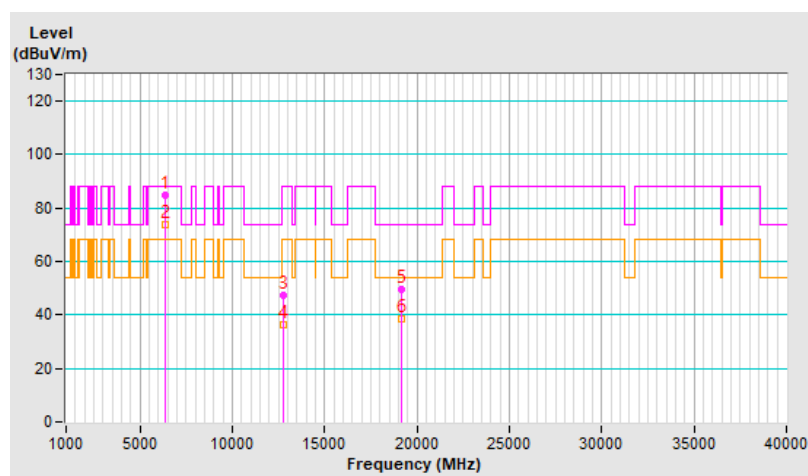


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	97.3 PK			1.96 V	272	90.7	6.6
2	*6385.00	85.5 AV			1.96 V	272	78.9	6.6
3	#12770.00	46.6 PK	88.2	-41.6	1.83 V	280	31.7	14.9
4	#12770.00	36.3 AV	68.2	-31.9	1.83 V	280	21.4	14.9
5	19155.00	49.7 PK	74.0	-24.3	2.58 V	165	54.4	-4.7
6	19155.00	38.6 AV	54.0	-15.4	2.58 V	165	43.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

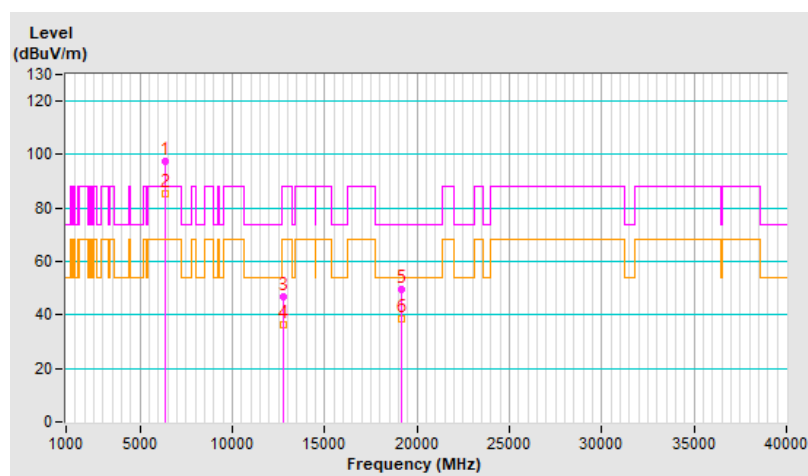


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	84.4 PK			1.05 H	231	76.6	7.8
2	*6625.00	73.7 AV			1.05 H	231	65.9	7.8
3	13250.00	47.0 PK	74.0	-27.0	1.76 H	264	31.6	15.4
4	13250.00	36.2 AV	54.0	-17.8	1.76 H	264	20.8	15.4
5	19875.00	49.6 PK	74.0	-24.4	2.64 H	153	54.1	-4.5
6	19875.00	38.4 AV	54.0	-15.6	2.64 H	153	42.9	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

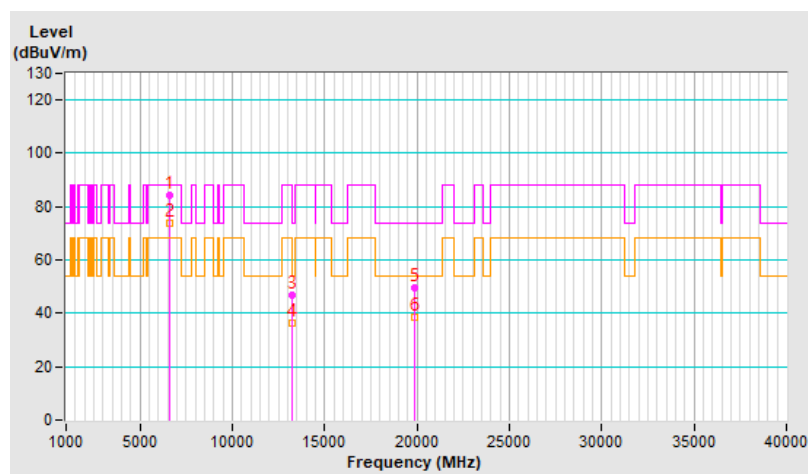


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	97.7 PK			1.94 V	295	89.9	7.8
2	*6625.00	86.1 AV			1.94 V	295	78.3	7.8
3	13250.00	46.3 PK	74.0	-27.7	1.83 V	293	30.9	15.4
4	13250.00	36.0 AV	54.0	-18.0	1.83 V	293	20.6	15.4
5	19875.00	49.4 PK	74.0	-24.6	2.59 V	169	53.9	-4.5
6	19875.00	38.1 AV	54.0	-15.9	2.59 V	169	42.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

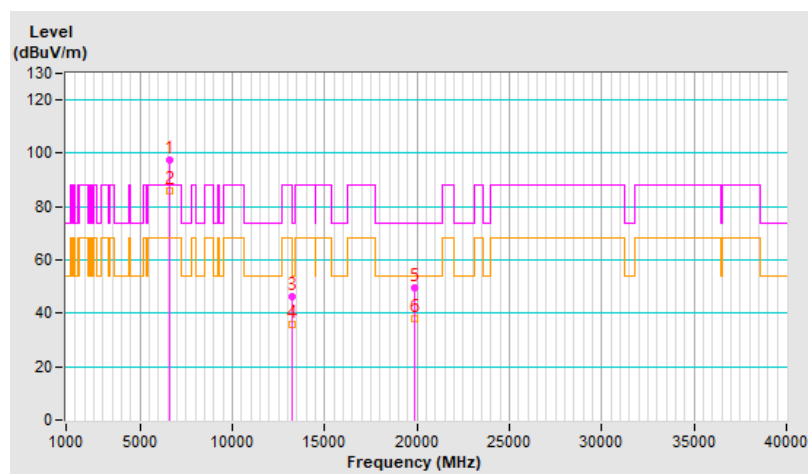


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	85.2 PK			1.03 H	227	77.6	7.6
2	*6705.00	74.0 AV			1.03 H	227	66.4	7.6
3	#13410.00	47.8 PK	88.2	-40.4	1.77 H	262	32.4	15.4
4	#13410.00	36.9 AV	68.2	-31.3	1.77 H	262	21.5	15.4
5	20115.00	49.3 PK	74.0	-24.7	2.65 H	150	53.4	-4.1
6	20115.00	38.3 AV	54.0	-15.7	2.65 H	150	42.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

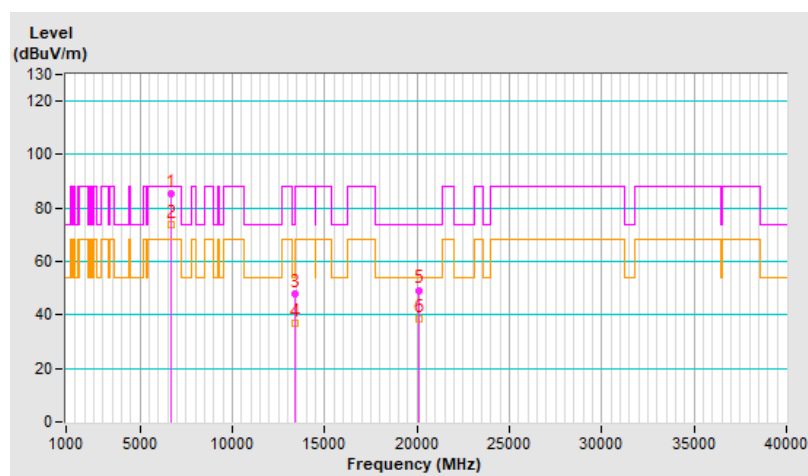


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	97.1 PK			1.90 V	288	89.5	7.6
2	*6705.00	85.3 AV			1.90 V	288	77.7	7.6
3	#13410.00	46.2 PK	88.2	-42.0	1.73 V	286	30.8	15.4
4	#13410.00	35.8 AV	68.2	-32.4	1.73 V	286	20.4	15.4
5	20115.00	49.2 PK	74.0	-24.8	2.58 V	156	53.3	-4.1
6	20115.00	38.1 AV	54.0	-15.9	2.58 V	156	42.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

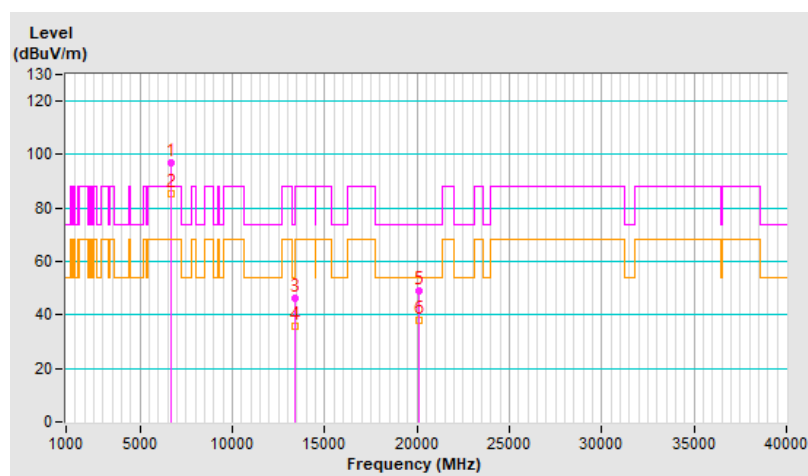


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	87.2 PK			1.03 H	222	79.5	7.7
2	*6785.00	75.8 AV			1.03 H	222	68.1	7.7
3	#13570.00	47.9 PK	88.2	-40.3	1.70 H	262	32.2	15.7
4	#13570.00	36.9 AV	68.2	-31.3	1.70 H	262	21.2	15.7
5	20355.00	48.7 PK	74.0	-25.3	2.61 H	144	52.5	-3.8
6	20355.00	37.8 AV	54.0	-16.2	2.61 H	144	41.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

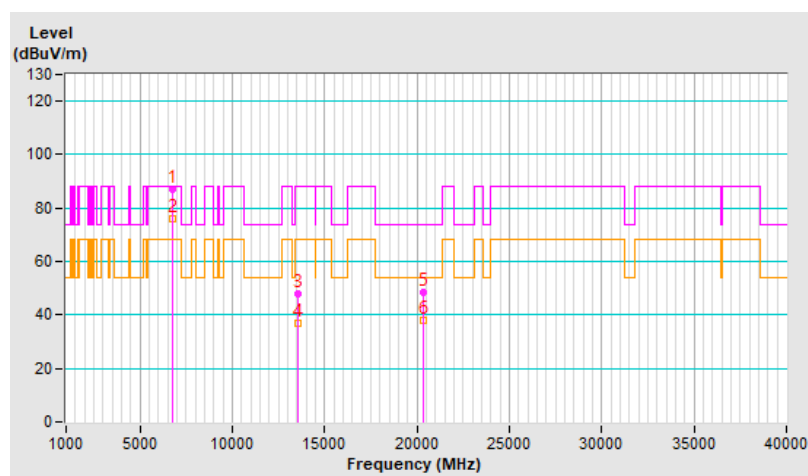


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	98.5 PK			1.00 V	89	90.8	7.7
2	*6785.00	87.2 AV			1.00 V	89	79.5	7.7
3	#13570.00	46.3 PK	88.2	-41.9	1.79 V	266	30.6	15.7
4	#13570.00	36.2 AV	68.2	-32.0	1.79 V	266	20.5	15.7
5	20355.00	49.6 PK	74.0	-24.4	2.67 V	171	53.4	-3.8
6	20355.00	38.4 AV	54.0	-15.6	2.67 V	171	42.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

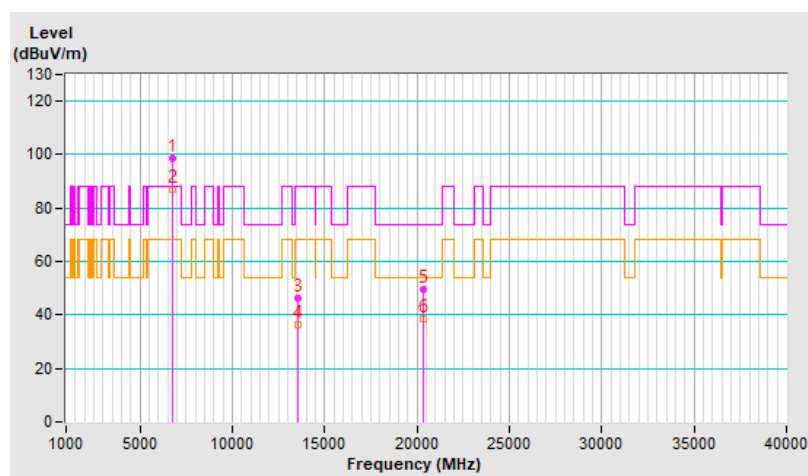


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.16 H	219	46.5	5.6
2	#5925.00	40.0 AV	68.2	-28.2	1.16 H	219	34.4	5.6
3	*6025.00	84.1 PK			1.16 H	219	78.5	5.6
4	*6025.00	73.6 AV			1.16 H	219	68.0	5.6
5	12050.00	47.4 PK	74.0	-26.6	1.77 H	262	32.8	14.6
6	12050.00	36.9 AV	54.0	-17.1	1.77 H	262	22.3	14.6
7	18075.00	49.3 PK	74.0	-24.7	2.62 H	137	54.6	-5.3
8	18075.00	38.0 AV	54.0	-16.0	2.62 H	137	43.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

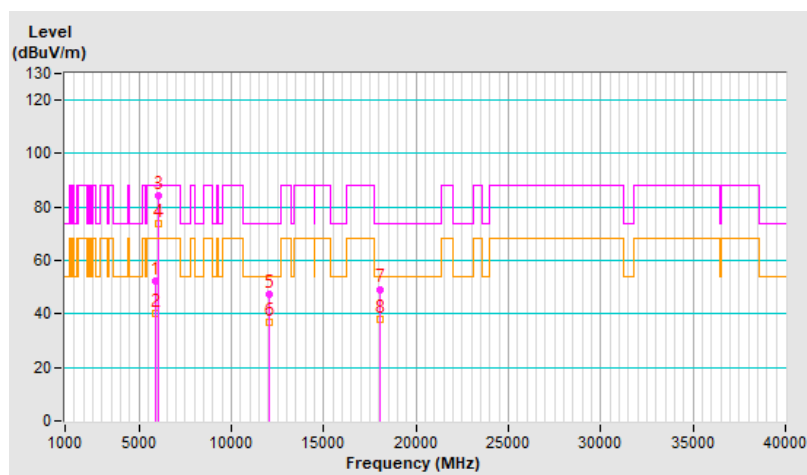


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.6 PK	88.2	-28.6	1.87 V	238	54.0	5.6
2	#5925.00	43.3 AV	68.2	-24.9	1.87 V	238	37.7	5.6
3	*6025.00	96.6 PK			1.87 V	238	91.0	5.6
4	*6025.00	84.2 AV			1.87 V	238	78.6	5.6
5	12050.00	46.3 PK	74.0	-27.7	1.83 V	268	31.7	14.6
6	12050.00	36.3 AV	54.0	-17.7	1.83 V	268	21.7	14.6
7	18075.00	49.9 PK	74.0	-24.1	2.58 V	163	55.2	-5.3
8	18075.00	38.4 AV	54.0	-15.6	2.58 V	163	43.7	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

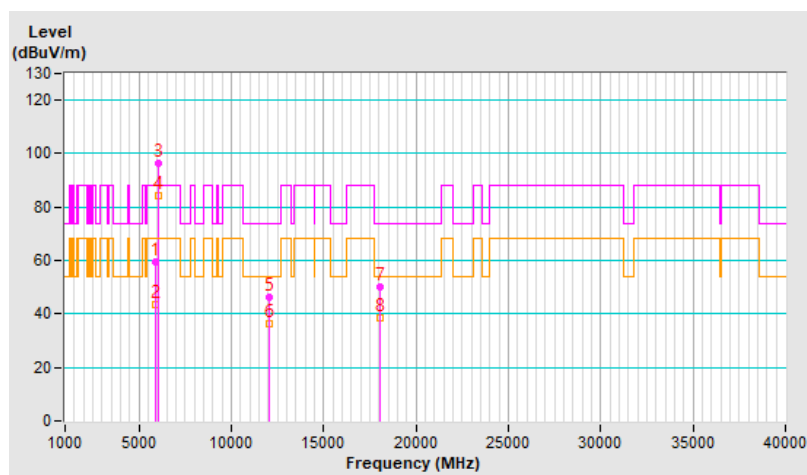


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	84.5 PK			1.14 H	224	78.7	5.8
2	*6185.00	74.0 AV			1.14 H	224	68.2	5.8
3	12370.00	47.5 PK	74.0	-26.5	1.75 H	262	32.8	14.7
4	12370.00	37.0 AV	54.0	-17.0	1.75 H	262	22.3	14.7
5	18555.00	49.7 PK	74.0	-24.3	2.57 H	156	55.1	-5.4
6	18555.00	38.2 AV	54.0	-15.8	2.57 H	156	43.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

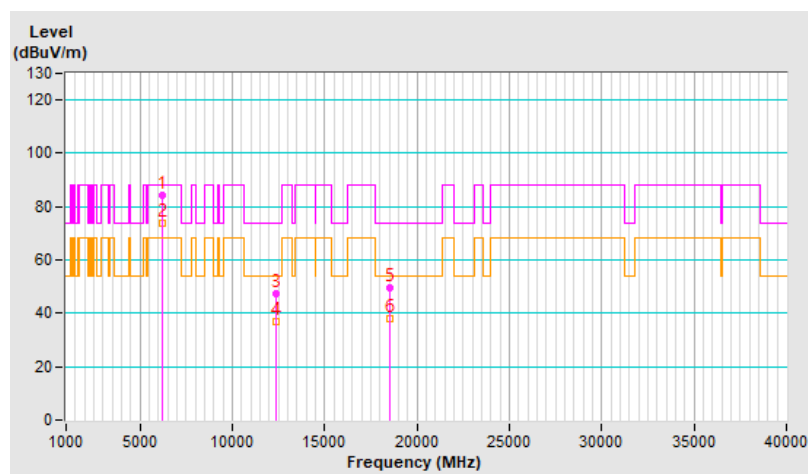


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	96.1 PK			1.84 V	227	90.3	5.8
2	*6185.00	84.0 AV			1.84 V	227	78.2	5.8
3	12370.00	46.4 PK	74.0	-27.6	1.80 V	273	31.7	14.7
4	12370.00	36.0 AV	54.0	-18.0	1.80 V	273	21.3	14.7
5	18555.00	50.1 PK	74.0	-23.9	2.59 V	179	55.5	-5.4
6	18555.00	38.6 AV	54.0	-15.4	2.59 V	179	44.0	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

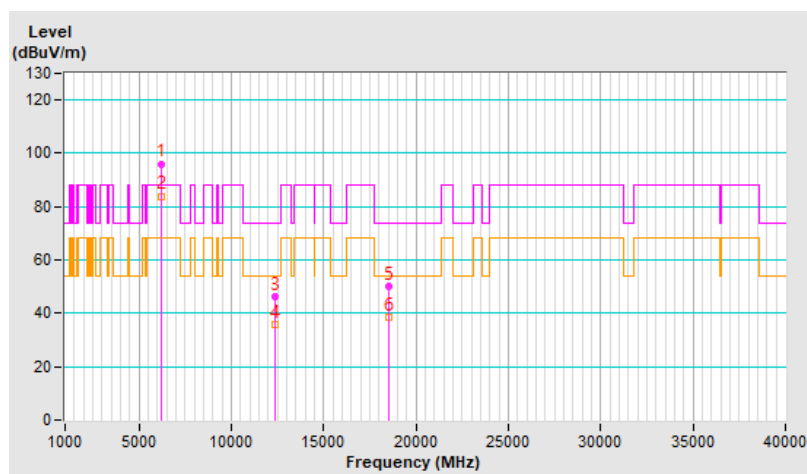


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	83.8 PK			1.14 H	206	77.4	6.4
2	*6345.00	73.2 AV			1.14 H	206	66.8	6.4
3	12690.00	47.2 PK	74.0	-26.8	1.78 H	284	32.3	14.9
4	12690.00	36.8 AV	54.0	-17.2	1.78 H	284	21.9	14.9
5	19035.00	49.5 PK	74.0	-24.5	2.62 H	142	54.4	-4.9
6	19035.00	38.4 AV	54.0	-15.6	2.62 H	142	43.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

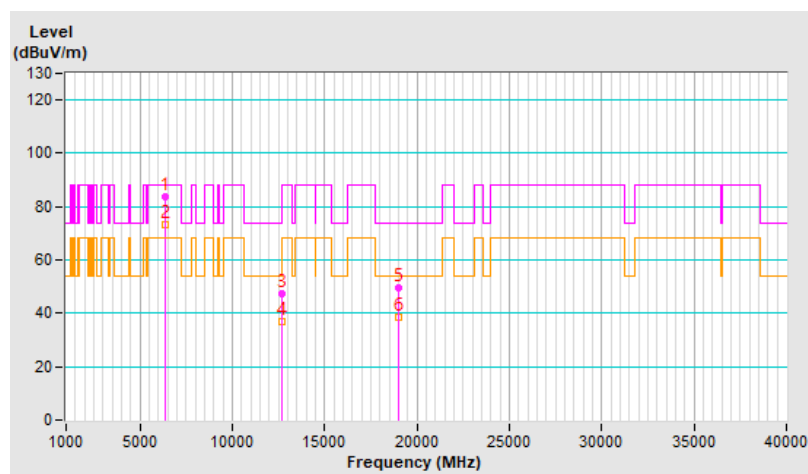


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.1 PK			1.84 V	245	89.7	6.4
2	*6345.00	84.0 AV			1.84 V	245	77.6	6.4
3	12690.00	46.1 PK	74.0	-27.9	1.74 V	267	31.2	14.9
4	12690.00	35.9 AV	54.0	-18.1	1.74 V	267	21.0	14.9
5	19035.00	50.0 PK	74.0	-24.0	2.64 V	160	54.9	-4.9
6	19035.00	38.8 AV	54.0	-15.2	2.64 V	160	43.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

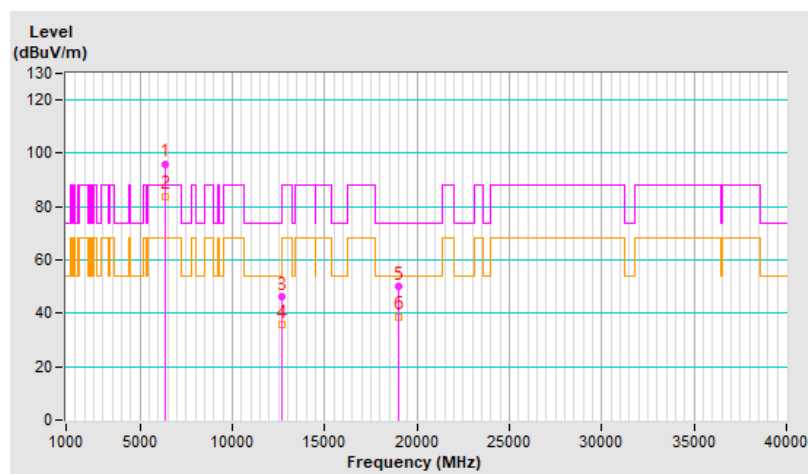


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	88.9 PK			1.20 H	229	81.1	7.8
2	*6665.00	78.0 AV			1.20 H	229	70.2	7.8
3	13330.00	47.2 PK	74.0	-26.8	1.76 H	280	31.9	15.3
4	13330.00	36.3 AV	54.0	-17.7	1.76 H	280	21.0	15.3
5	19995.00	49.7 PK	74.0	-24.3	2.60 H	152	54.1	-4.4
6	19995.00	38.5 AV	54.0	-15.5	2.60 H	152	42.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

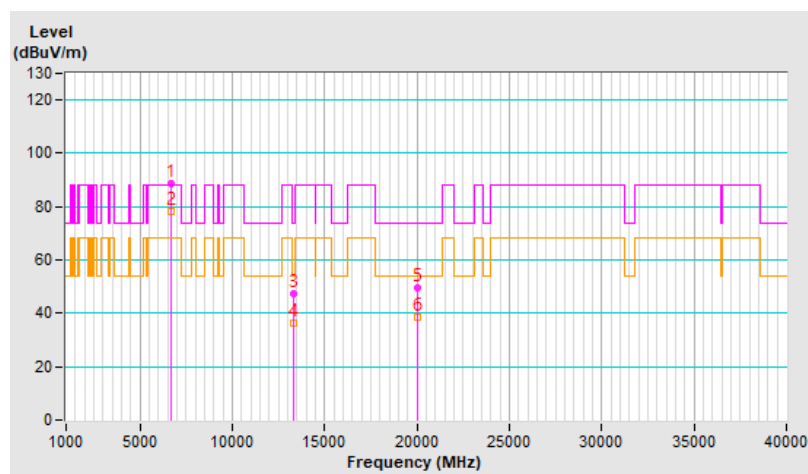


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	98.0 PK			1.31 V	78	90.2	7.8
2	*6665.00	87.5 AV			1.31 V	78	79.7	7.8
3	13330.00	46.9 PK	74.0	-27.1	1.79 V	273	31.6	15.3
4	13330.00	36.5 AV	54.0	-17.5	1.79 V	273	21.2	15.3
5	19995.00	50.3 PK	74.0	-23.7	2.64 V	154	54.7	-4.4
6	19995.00	38.8 AV	54.0	-15.2	2.64 V	154	43.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

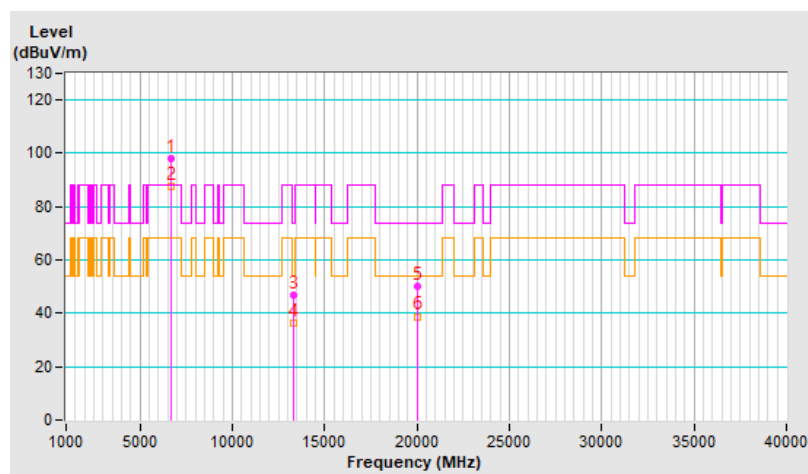


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	2.47 H	37	45.8	5.6
2	#5925.00	39.8 AV	68.2	-28.4	2.47 H	37	34.2	5.6
3	*5955.00	78.7 PK			2.47 H	37	73.2	5.5
4	*5955.00	69.8 AV			2.47 H	37	64.3	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.84 H	312	32.1	14.6
6	11910.00	36.4 AV	54.0	-17.6	1.84 H	312	21.8	14.6
7	17865.00	48.7 PK	74.0	-25.3	2.56 H	150	22.8	25.9
8	17865.00	37.5 AV	54.0	-16.5	2.56 H	150	11.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

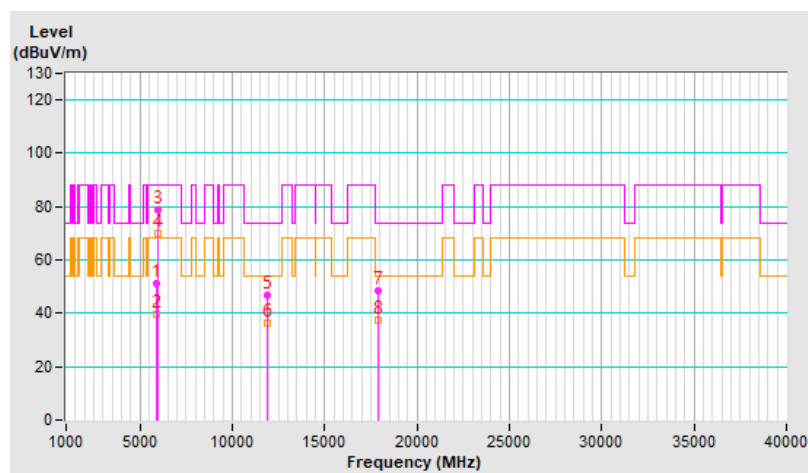


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.77 V	259	45.8	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.77 V	259	34.1	5.6
3	*5955.00	95.5 PK			1.77 V	259	90.0	5.5
4	*5955.00	85.9 AV			1.77 V	259	80.4	5.5
5	11910.00	46.8 PK	74.0	-27.2	1.72 V	295	32.2	14.6
6	11910.00	36.8 AV	54.0	-17.2	1.72 V	295	22.2	14.6
7	17865.00	50.2 PK	74.0	-23.8	2.65 V	171	24.3	25.9
8	17865.00	38.1 AV	54.0	-15.9	2.65 V	171	12.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

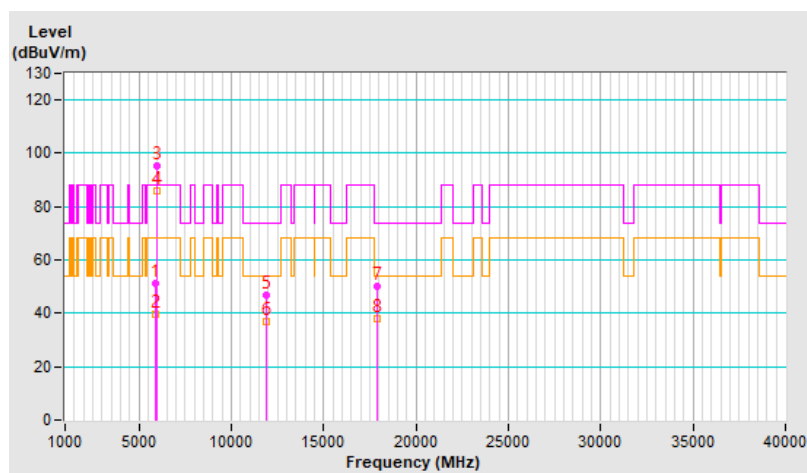


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	81.5 PK			1.42 H	43	75.7	5.8
2	*6195.00	72.9 AV			1.42 H	43	67.1	5.8
3	12390.00	47.4 PK	74.0	-26.6	1.76 H	289	32.7	14.7
4	12390.00	37.1 AV	54.0	-16.9	1.76 H	289	22.4	14.7
5	18585.00	49.3 PK	74.0	-24.7	2.51 H	149	54.8	-5.5
6	18585.00	37.7 AV	54.0	-16.3	2.51 H	149	43.2	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

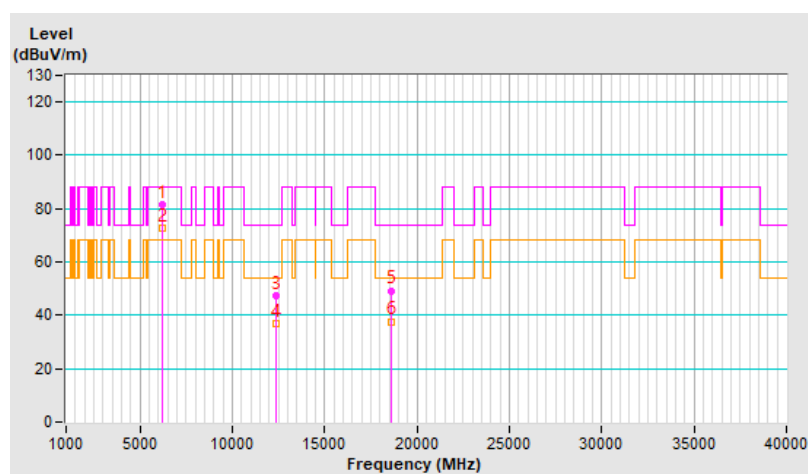


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.6 PK			1.73 V	248	89.8	5.8
2	*6195.00	86.2 AV			1.73 V	248	80.4	5.8
3	12390.00	46.5 PK	74.0	-27.5	1.73 V	298	31.8	14.7
4	12390.00	36.4 AV	54.0	-17.6	1.73 V	298	21.7	14.7
5	18585.00	49.6 PK	74.0	-24.4	2.63 V	181	55.1	-5.5
6	18585.00	37.9 AV	54.0	-16.1	2.63 V	181	43.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

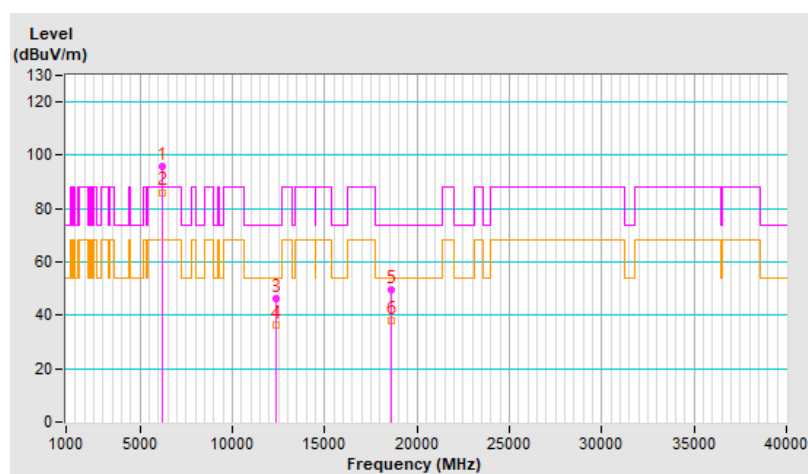


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	82.3 PK			1.37 H	38	75.5	6.8
2	*6415.00	73.5 AV			1.37 H	38	66.7	6.8
3	#12830.00	47.5 PK	88.2	-40.7	1.78 H	297	32.4	15.1
4	#12830.00	37.2 AV	68.2	-31.0	1.78 H	297	22.1	15.1
5	19245.00	49.2 PK	74.0	-24.8	2.60 H	145	53.8	-4.6
6	19245.00	37.8 AV	54.0	-16.2	2.60 H	145	42.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

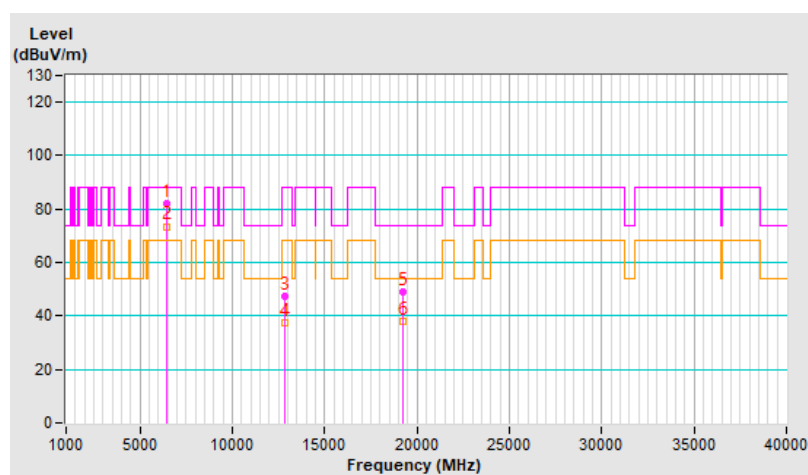


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.8 PK			1.77 V	258	89.0	6.8
2	*6415.00	86.1 AV			1.77 V	258	79.3	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.71 V	296	31.4	15.1
4	#12830.00	36.6 AV	68.2	-31.6	1.71 V	296	21.5	15.1
5	19245.00	50.1 PK	74.0	-23.9	2.63 V	186	54.7	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.63 V	186	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

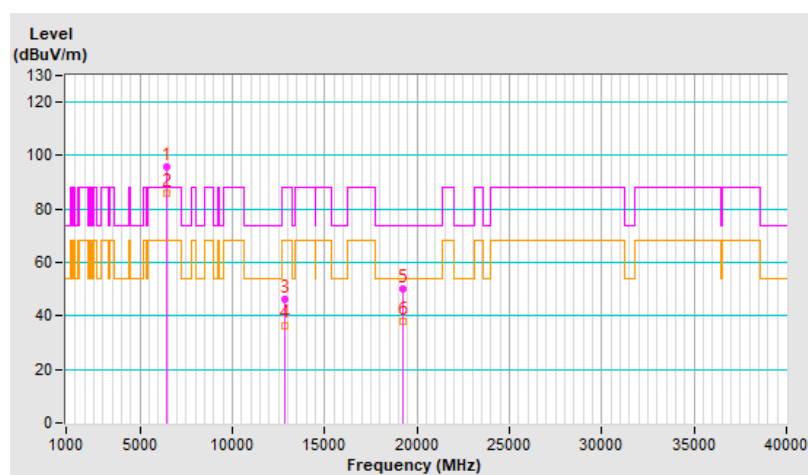


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	81.8 PK			1.44 H	57	74.4	7.4
2	*6535.00	73.2 AV			1.44 H	57	65.8	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.76 H	284	31.9	15.1
4	#13070.00	36.7 AV	68.2	-31.5	1.76 H	284	21.6	15.1
5	19605.00	49.1 PK	74.0	-24.9	2.57 H	158	53.9	-4.8
6	19605.00	37.8 AV	54.0	-16.2	2.57 H	158	42.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

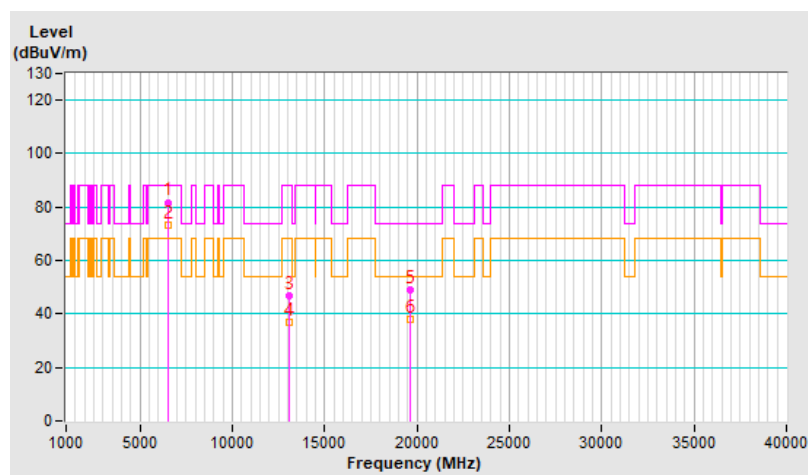


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.7 PK			1.82 V	253	88.3	7.4
2	*6535.00	85.8 AV			1.82 V	253	78.4	7.4
3	#13070.00	46.6 PK	88.2	-41.6	1.73 V	295	31.5	15.1
4	#13070.00	36.4 AV	68.2	-31.8	1.73 V	295	21.3	15.1
5	19605.00	50.7 PK	74.0	-23.3	2.59 V	172	55.5	-4.8
6	19605.00	38.6 AV	54.0	-15.4	2.59 V	172	43.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

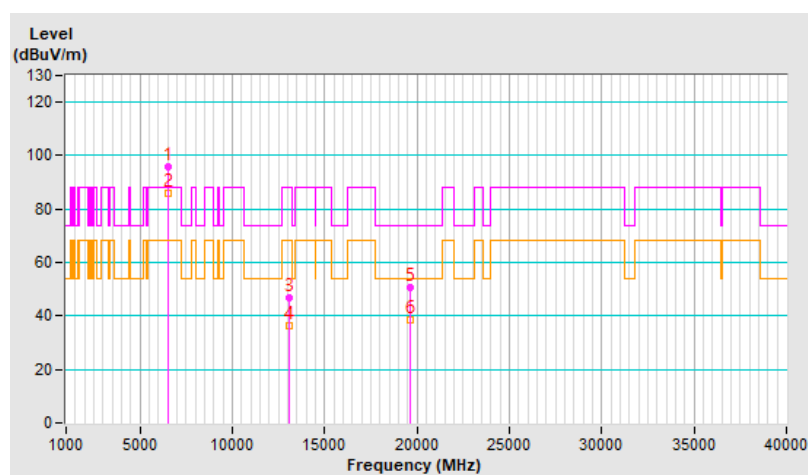


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	82.2 PK			1.37 H	40	74.5	7.7
2	*6695.00	73.4 AV			1.37 H	40	65.7	7.7
3	13390.00	47.1 PK	74.0	-26.9	1.82 H	305	31.7	15.4
4	13390.00	36.7 AV	54.0	-17.3	1.82 H	305	21.3	15.4
5	20085.00	49.2 PK	74.0	-24.8	2.52 H	151	53.5	-4.3
6	20085.00	37.7 AV	54.0	-16.3	2.52 H	151	42.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

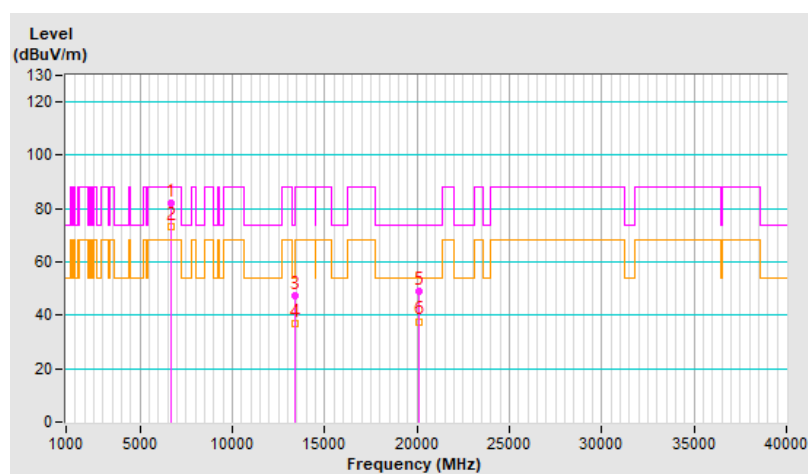


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	95.2 PK			1.73 V	253	87.5	7.7
2	*6695.00	85.8 AV			1.73 V	253	78.1	7.7
3	13390.00	46.5 PK	74.0	-27.5	1.73 V	280	31.1	15.4
4	13390.00	36.2 AV	54.0	-17.8	1.73 V	280	20.8	15.4
5	20085.00	50.0 PK	74.0	-24.0	2.63 V	174	54.3	-4.3
6	20085.00	37.9 AV	54.0	-16.1	2.63 V	174	42.2	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

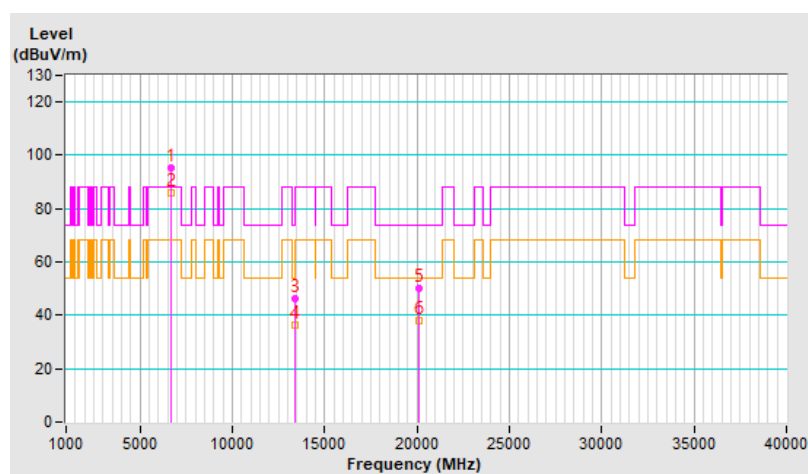


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	82.2 PK			1.39 H	48	74.0	8.2
2	*6855.00	73.4 AV			1.39 H	48	65.2	8.2
3	#13710.00	47.1 PK	88.2	-41.1	1.81 H	299	30.8	16.3
4	#13710.00	36.7 AV	68.2	-31.5	1.81 H	299	20.4	16.3
5	20565.00	48.9 PK	74.0	-25.1	2.58 H	167	52.6	-3.7
6	20565.00	37.8 AV	54.0	-16.2	2.58 H	167	41.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

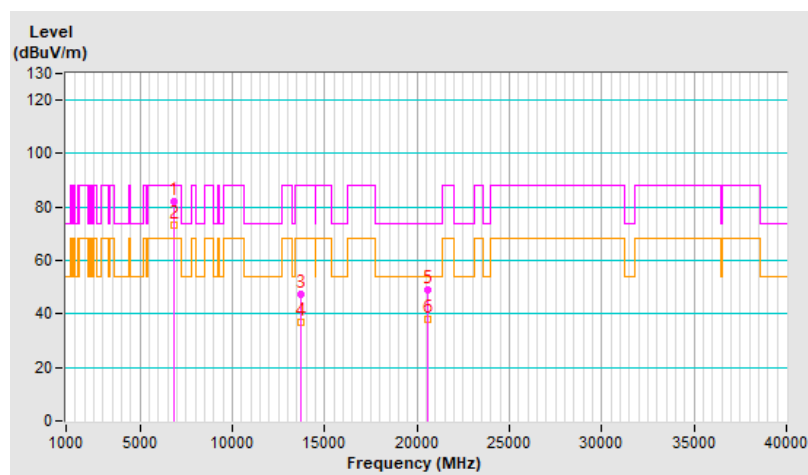


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.9 PK			1.72 V	265	89.7	8.2
2	*6855.00	86.7 AV			1.72 V	265	78.5	8.2
3	#13710.00	47.3 PK	88.2	-40.9	1.73 V	280	31.0	16.3
4	#13710.00	37.1 AV	68.2	-31.1	1.73 V	280	20.8	16.3
5	20565.00	50.5 PK	74.0	-23.5	2.59 V	181	54.2	-3.7
6	20565.00	38.8 AV	54.0	-15.2	2.59 V	181	42.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

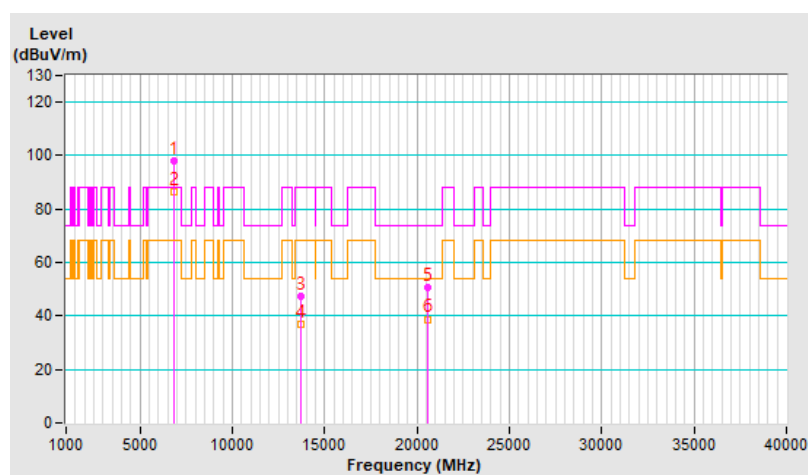


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	2.47 H	54	46.0	5.6
2	#5925.00	39.9 AV	68.2	-28.3	2.47 H	54	34.3	5.6
3	*5955.00	82.2 PK			2.47 H	54	76.7	5.5
4	*5955.00	73.4 AV			2.47 H	54	67.9	5.5
5	11910.00	47.2 PK	74.0	-26.8	1.81 H	298	32.6	14.6
6	11910.00	36.8 AV	54.0	-17.2	1.81 H	298	22.2	14.6
7	17865.00	49.3 PK	74.0	-24.7	2.57 H	153	23.4	25.9
8	17865.00	38.0 AV	54.0	-16.0	2.57 H	153	12.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

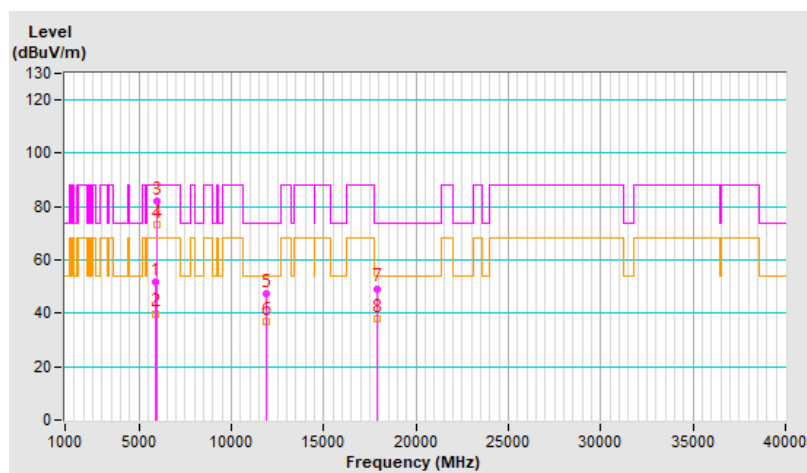


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.47 V	264	45.5	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.47 V	264	34.2	5.6
3	*5955.00	96.6 PK			1.47 V	264	91.1	5.5
4	*5955.00	86.9 AV			1.47 V	264	81.4	5.5
5	11910.00	46.6 PK	74.0	-27.4	1.69 V	297	32.0	14.6
6	11910.00	36.8 AV	54.0	-17.2	1.69 V	297	22.2	14.6
7	17865.00	50.5 PK	74.0	-23.5	2.61 V	188	24.6	25.9
8	17865.00	38.5 AV	54.0	-15.5	2.61 V	188	12.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

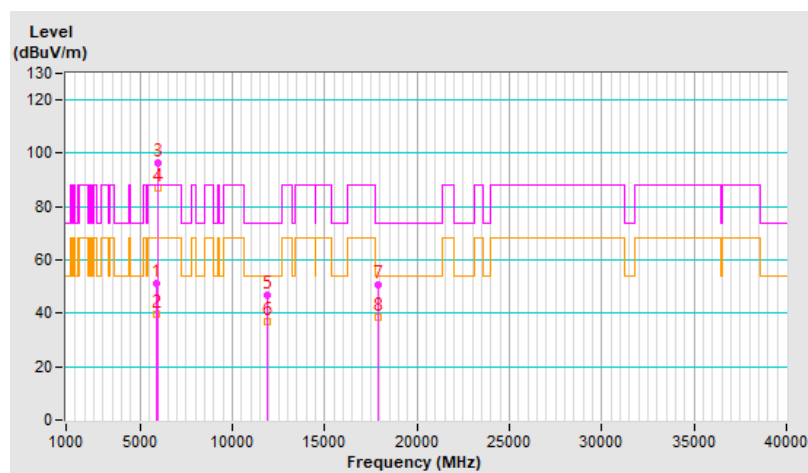


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	85.4 PK			1.47 H	42	79.6	5.8
2	*6195.00	74.6 AV			1.47 H	42	68.8	5.8
3	12390.00	47.0 PK	74.0	-27.0	1.81 H	306	32.3	14.7
4	12390.00	36.9 AV	54.0	-17.1	1.81 H	306	22.2	14.7
5	18585.00	49.7 PK	74.0	-24.3	2.59 H	158	55.2	-5.5
6	18585.00	38.1 AV	54.0	-15.9	2.59 H	158	43.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

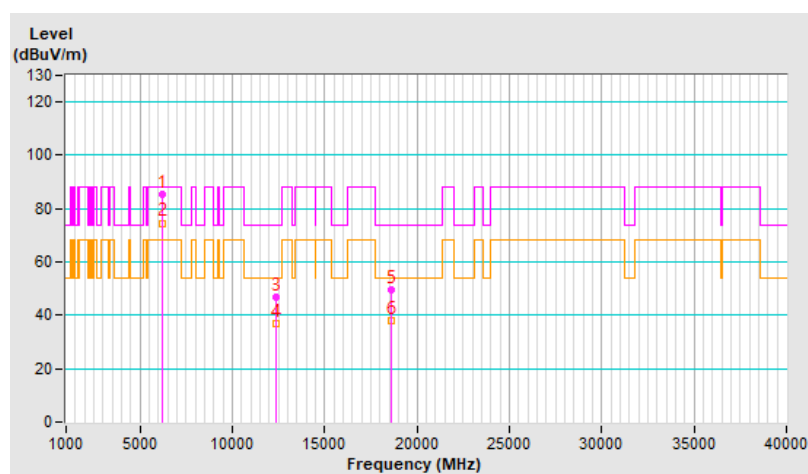


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	96.2 PK			1.48 V	256	90.4	5.8
2	*6195.00	86.6 AV			1.48 V	256	80.8	5.8
3	12390.00	46.6 PK	74.0	-27.4	1.63 V	294	31.9	14.7
4	12390.00	36.6 AV	54.0	-17.4	1.63 V	294	21.9	14.7
5	18585.00	50.1 PK	74.0	-23.9	2.62 V	182	55.6	-5.5
6	18585.00	38.2 AV	54.0	-15.8	2.62 V	182	43.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

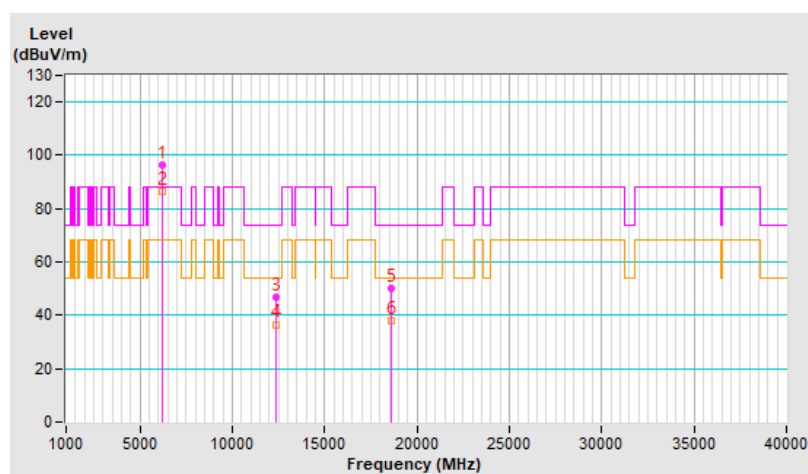


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	84.6 PK			1.35 H	40	77.8	6.8
2	*6415.00	73.9 AV			1.35 H	40	67.1	6.8
3	#12830.00	47.7 PK	88.2	-40.5	1.84 H	284	32.6	15.1
4	#12830.00	37.2 AV	68.2	-31.0	1.84 H	284	22.1	15.1
5	19245.00	49.8 PK	74.0	-24.2	2.51 H	133	54.4	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.51 H	133	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

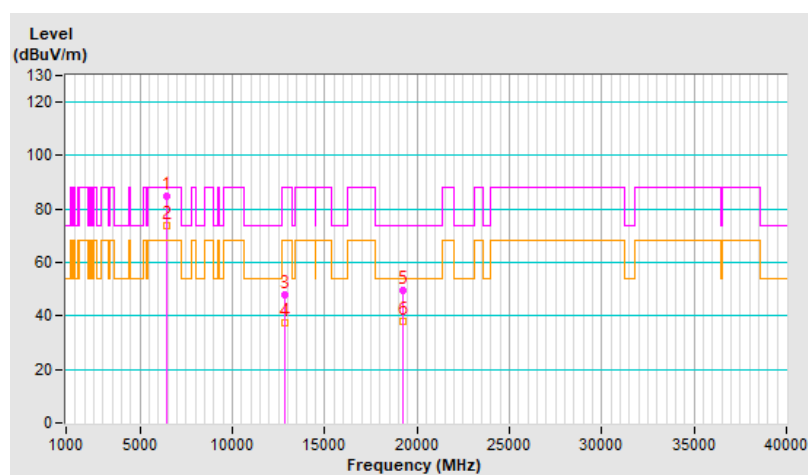


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.6 PK			1.53 V	277	89.8	6.8
2	*6415.00	86.7 AV			1.53 V	277	79.9	6.8
3	#12830.00	47.0 PK	88.2	-41.2	1.71 V	293	31.9	15.1
4	#12830.00	37.0 AV	68.2	-31.2	1.71 V	293	21.9	15.1
5	19245.00	50.3 PK	74.0	-23.7	2.62 V	170	54.9	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.62 V	170	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

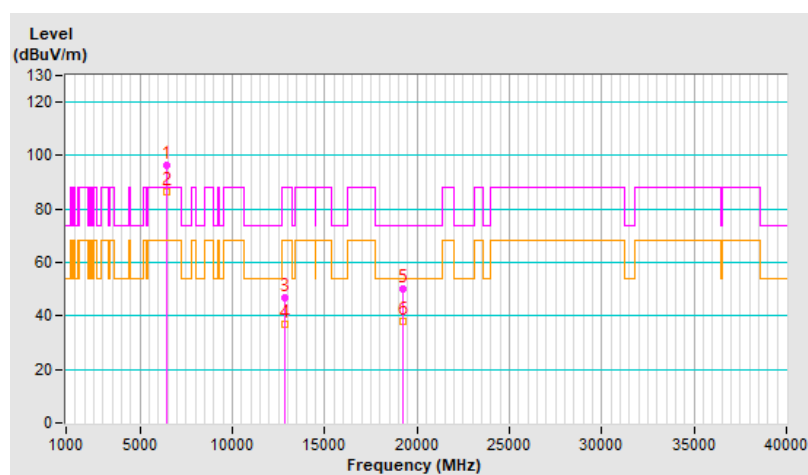


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	85.0 PK			1.36 H	45	77.6	7.4
2	*6535.00	73.8 AV			1.36 H	45	66.4	7.4
3	#13070.00	46.9 PK	88.2	-41.3	1.78 H	302	31.8	15.1
4	#13070.00	36.8 AV	68.2	-31.4	1.78 H	302	21.7	15.1
5	19605.00	49.4 PK	74.0	-24.6	2.57 H	142	54.2	-4.8
6	19605.00	38.1 AV	54.0	-15.9	2.57 H	142	42.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

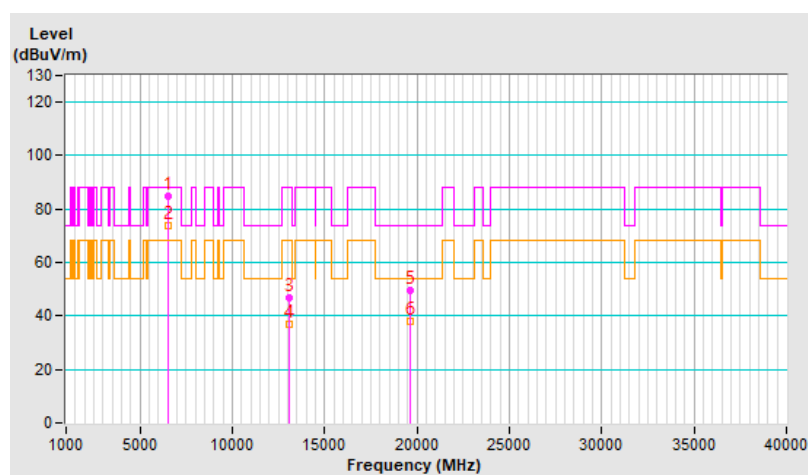


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.4 PK			1.50 V	261	89.0	7.4
2	*6535.00	86.8 AV			1.50 V	261	79.4	7.4
3	#13070.00	47.3 PK	88.2	-40.9	1.73 V	291	32.2	15.1
4	#13070.00	37.0 AV	68.2	-31.2	1.73 V	291	21.9	15.1
5	19605.00	50.8 PK	74.0	-23.2	2.66 V	191	55.6	-4.8
6	19605.00	38.7 AV	54.0	-15.3	2.66 V	191	43.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

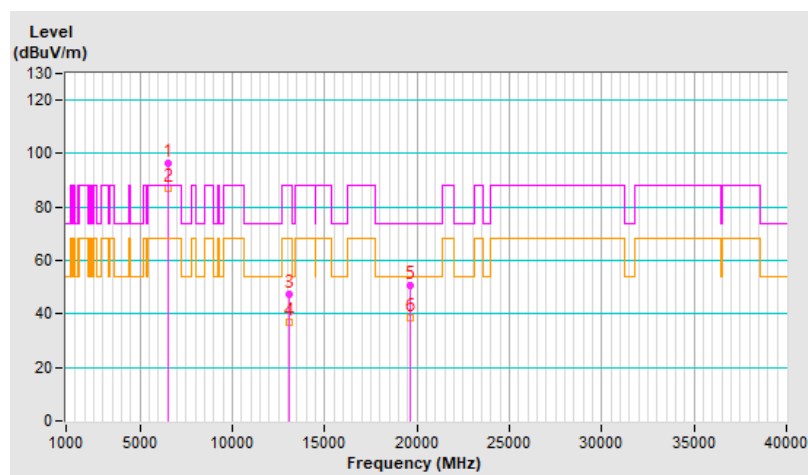


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	84.9 PK			1.39 H	53	77.2	7.7
2	*6695.00	74.1 AV			1.39 H	53	66.4	7.7
3	13390.00	47.5 PK	74.0	-26.5	1.73 H	292	32.1	15.4
4	13390.00	37.0 AV	54.0	-17.0	1.73 H	292	21.6	15.4
5	20085.00	48.9 PK	74.0	-25.1	2.52 H	133	53.2	-4.3
6	20085.00	37.7 AV	54.0	-16.3	2.52 H	133	42.0	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

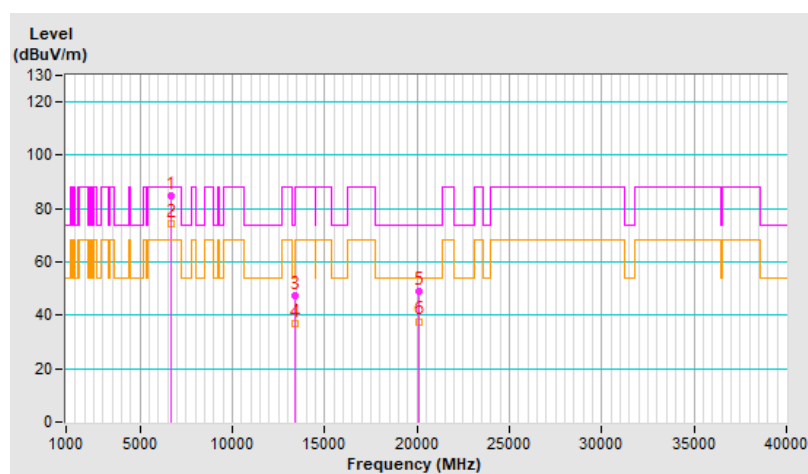


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.1 PK			1.48 V	253	88.4	7.7
2	*6695.00	86.4 AV			1.48 V	253	78.7	7.7
3	13390.00	46.9 PK	74.0	-27.1	1.70 V	307	31.5	15.4
4	13390.00	36.6 AV	54.0	-17.4	1.70 V	307	21.2	15.4
5	20085.00	50.6 PK	74.0	-23.4	2.65 V	166	54.9	-4.3
6	20085.00	38.6 AV	54.0	-15.4	2.65 V	166	42.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

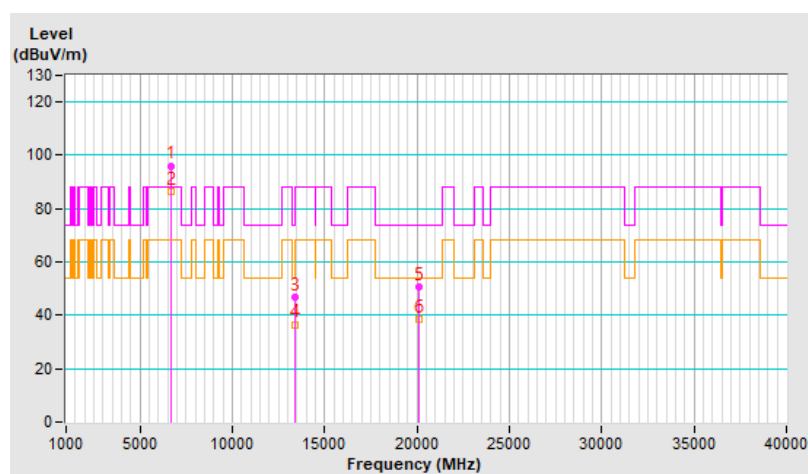


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	83.9 PK			1.31 H	43	75.7	8.2
2	*6855.00	75.2 AV			1.31 H	43	67.0	8.2
3	#13710.00	47.3 PK	88.2	-40.9	1.82 H	293	31.0	16.3
4	#13710.00	36.8 AV	68.2	-31.4	1.82 H	293	20.5	16.3
5	20565.00	48.7 PK	74.0	-25.3	2.61 H	128	52.4	-3.7
6	20565.00	37.5 AV	54.0	-16.5	2.61 H	128	41.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

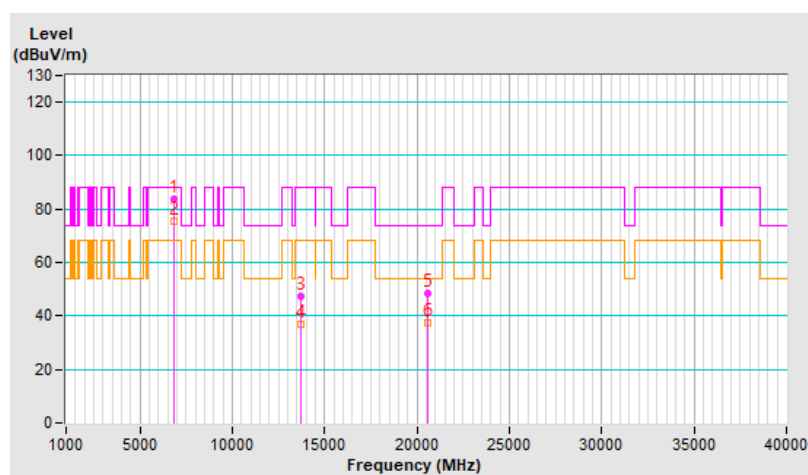


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	96.7 PK			1.81 V	265	88.5	8.2
2	*6855.00	87.5 AV			1.81 V	265	79.3	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.64 V	283	30.7	16.3
4	#13710.00	37.2 AV	68.2	-31.0	1.64 V	283	20.9	16.3
5	20565.00	50.7 PK	74.0	-23.3	2.58 V	167	54.4	-3.7
6	20565.00	38.8 AV	54.0	-15.2	2.58 V	167	42.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

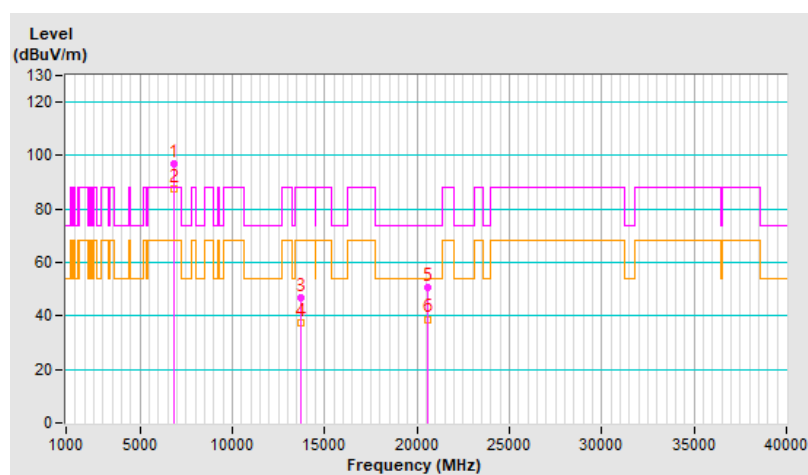


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.7 PK	88.2	-35.5	2.46 H	53	47.1	5.6
2	#5925.00	39.9 AV	68.2	-28.3	2.46 H	53	34.3	5.6
3	*5955.00	84.5 PK			2.46 H	53	79.0	5.5
4	*5955.00	73.6 AV			2.46 H	53	68.1	5.5
5	11910.00	47.7 PK	74.0	-26.3	1.74 H	294	33.1	14.6
6	11910.00	37.4 AV	54.0	-16.6	1.74 H	294	22.8	14.6
7	17865.00	49.6 PK	74.0	-24.4	2.53 H	156	23.7	25.9
8	17865.00	38.3 AV	54.0	-15.7	2.53 H	156	12.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

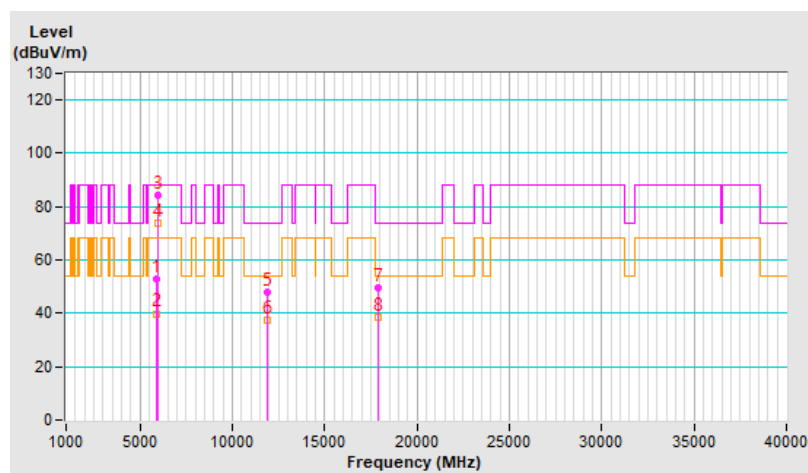


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.48 V	263	45.6	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.48 V	263	34.2	5.6
3	*5955.00	96.4 PK			1.48 V	263	90.9	5.5
4	*5955.00	86.9 AV			1.48 V	263	81.4	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.68 V	278	32.1	14.6
6	11910.00	36.9 AV	54.0	-17.1	1.68 V	278	22.3	14.6
7	17865.00	49.5 PK	74.0	-24.5	2.61 V	176	23.6	25.9
8	17865.00	37.8 AV	54.0	-16.2	2.61 V	176	11.9	25.9

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

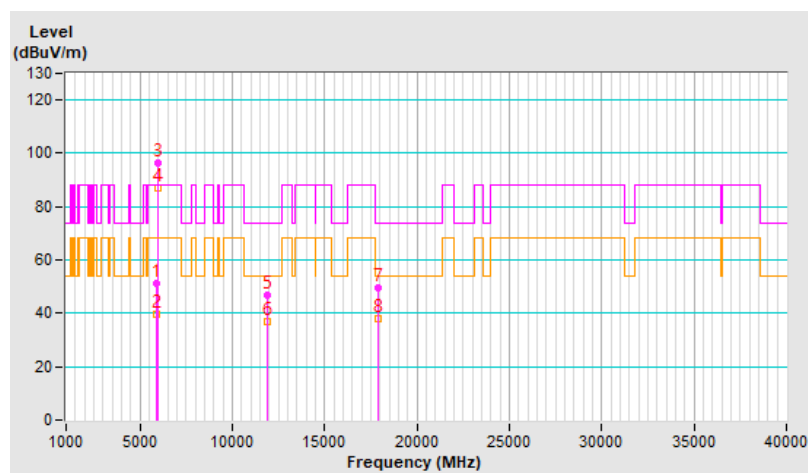


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	85.0 PK			1.46 H	35	79.2	5.8
2	*6195.00	74.2 AV			1.46 H	35	68.4	5.8
3	12390.00	47.6 PK	74.0	-26.4	1.74 H	275	32.9	14.7
4	12390.00	37.0 AV	54.0	-17.0	1.74 H	275	22.3	14.7
5	18585.00	49.2 PK	74.0	-24.8	2.56 H	144	54.7	-5.5
6	18585.00	37.9 AV	54.0	-16.1	2.56 H	144	43.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

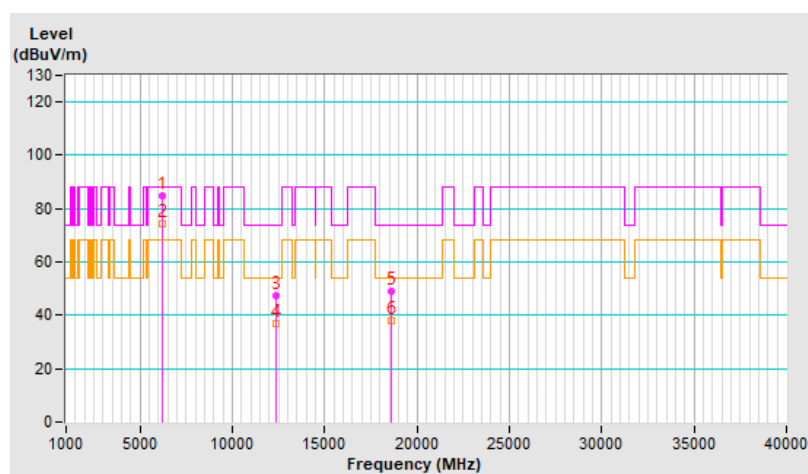


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	96.4 PK			1.52 V	257	90.6	5.8
2	*6195.00	86.7 AV			1.52 V	257	80.9	5.8
3	12390.00	46.4 PK	74.0	-27.6	1.69 V	289	31.7	14.7
4	12390.00	36.3 AV	54.0	-17.7	1.69 V	289	21.6	14.7
5	18585.00	49.9 PK	74.0	-24.1	2.62 V	188	55.4	-5.5
6	18585.00	38.1 AV	54.0	-15.9	2.62 V	188	43.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

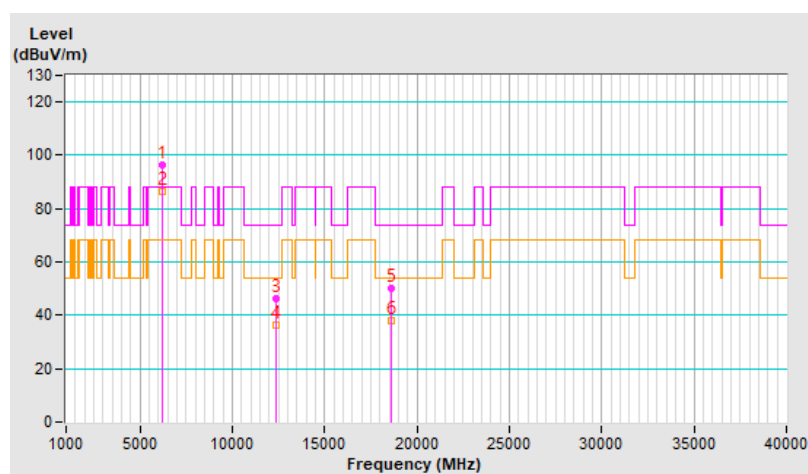


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	85.1 PK			1.42 H	40	78.3	6.8
2	*6415.00	74.4 AV			1.42 H	40	67.6	6.8
3	#12830.00	47.8 PK	88.2	-40.4	1.78 H	296	32.7	15.1
4	#12830.00	37.5 AV	68.2	-30.7	1.78 H	296	22.4	15.1
5	19245.00	49.5 PK	74.0	-24.5	2.54 H	147	54.1	-4.6
6	19245.00	38.3 AV	54.0	-15.7	2.54 H	147	42.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

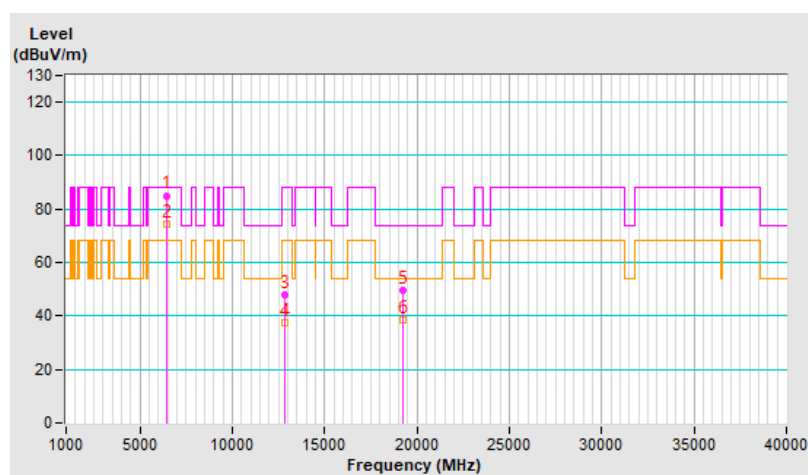


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.6 PK			1.44 V	249	89.8	6.8
2	*6415.00	86.8 AV			1.44 V	249	80.0	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.69 V	277	31.4	15.1
4	#12830.00	36.5 AV	68.2	-31.7	1.69 V	277	21.4	15.1
5	19245.00	49.9 PK	74.0	-24.1	2.59 V	189	54.5	-4.6
6	19245.00	37.8 AV	54.0	-16.2	2.59 V	189	42.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

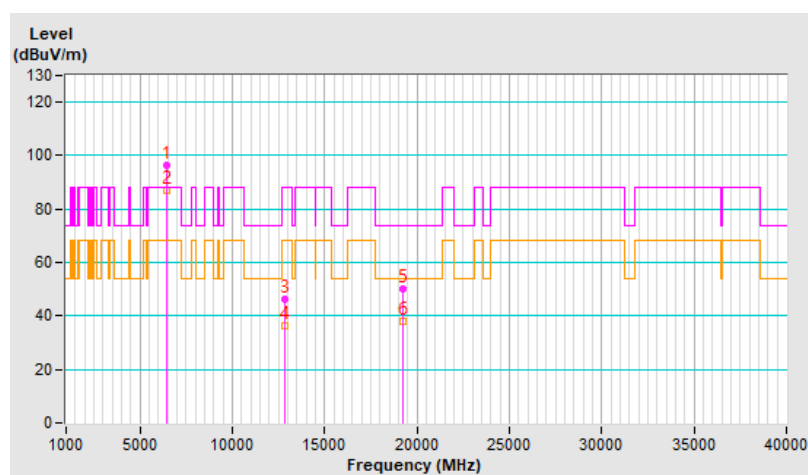


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	85.1 PK			1.46 H	54	77.7	7.4
2	*6535.00	74.4 AV			1.46 H	54	67.0	7.4
3	#13070.00	47.6 PK	88.2	-40.6	1.81 H	298	32.5	15.1
4	#13070.00	37.2 AV	68.2	-31.0	1.81 H	298	22.1	15.1
5	19605.00	48.9 PK	74.0	-25.1	2.61 H	129	53.7	-4.8
6	19605.00	37.6 AV	54.0	-16.4	2.61 H	129	42.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

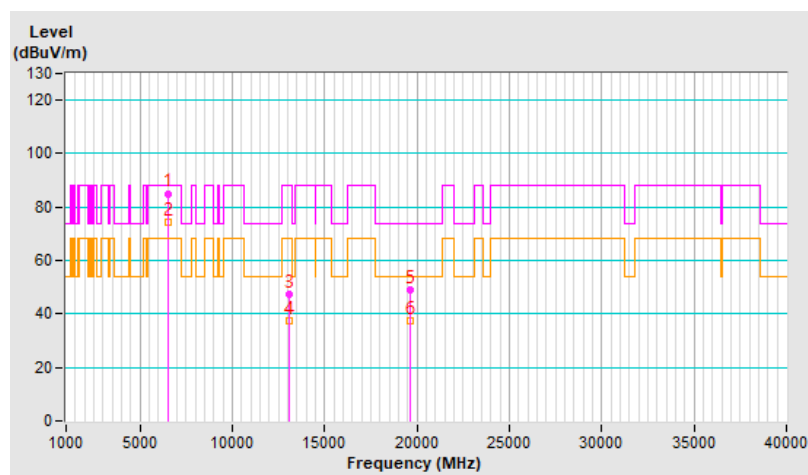


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.1 PK			1.43 V	276	88.7	7.4
2	*6535.00	86.7 AV			1.43 V	276	79.3	7.4
3	#13070.00	46.4 PK	88.2	-41.8	1.68 V	279	31.3	15.1
4	#13070.00	36.7 AV	68.2	-31.5	1.68 V	279	21.6	15.1
5	19605.00	50.0 PK	74.0	-24.0	2.60 V	175	54.8	-4.8
6	19605.00	38.3 AV	54.0	-15.7	2.60 V	175	43.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

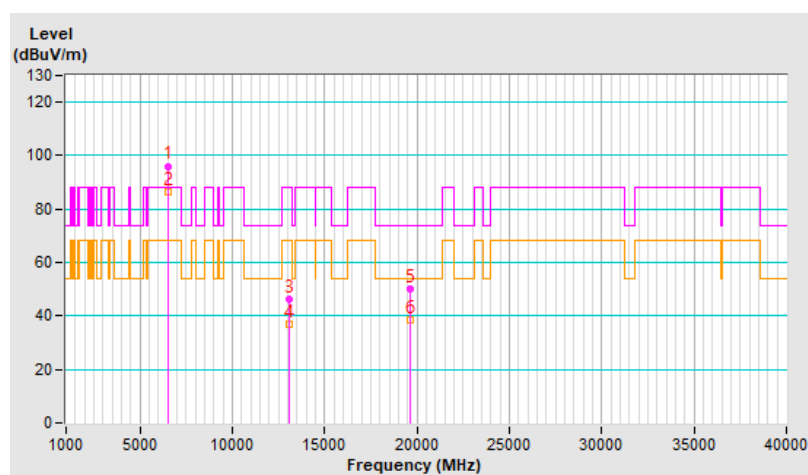


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	85.2 PK			1.37 H	39	77.5	7.7
2	*6695.00	74.4 AV			1.37 H	39	66.7	7.7
3	13390.00	47.5 PK	74.0	-26.5	1.79 H	305	32.1	15.4
4	13390.00	37.3 AV	54.0	-16.7	1.79 H	305	21.9	15.4
5	20085.00	49.0 PK	74.0	-25.0	2.53 H	146	53.3	-4.3
6	20085.00	37.6 AV	54.0	-16.4	2.53 H	146	41.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

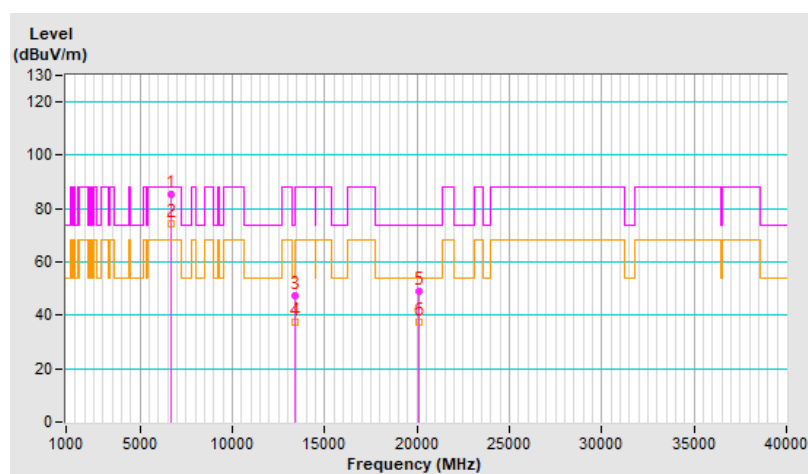


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.6 PK			1.44 V	256	88.9	7.7
2	*6695.00	86.8 AV			1.44 V	256	79.1	7.7
3	13390.00	46.5 PK	74.0	-27.5	1.66 V	287	31.1	15.4
4	13390.00	36.2 AV	54.0	-17.8	1.66 V	287	20.8	15.4
5	20085.00	50.3 PK	74.0	-23.7	2.66 V	197	54.6	-4.3
6	20085.00	38.6 AV	54.0	-15.4	2.66 V	197	42.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

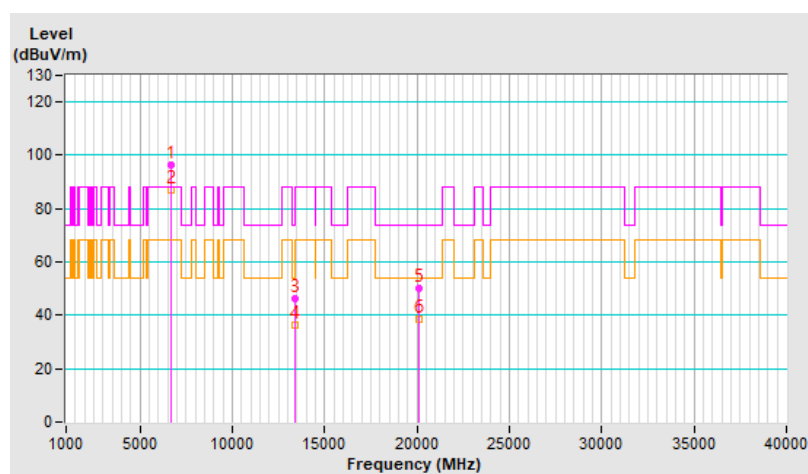


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	85.4 PK			1.32 H	48	77.2	8.2
2	*6855.00	74.9 AV			1.32 H	48	66.7	8.2
3	#13710.00	47.8 PK	88.2	-40.4	1.81 H	303	31.5	16.3
4	#13710.00	37.6 AV	68.2	-30.6	1.81 H	303	21.3	16.3
5	20565.00	49.4 PK	74.0	-24.6	2.52 H	129	53.1	-3.7
6	20565.00	37.8 AV	54.0	-16.2	2.52 H	129	41.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

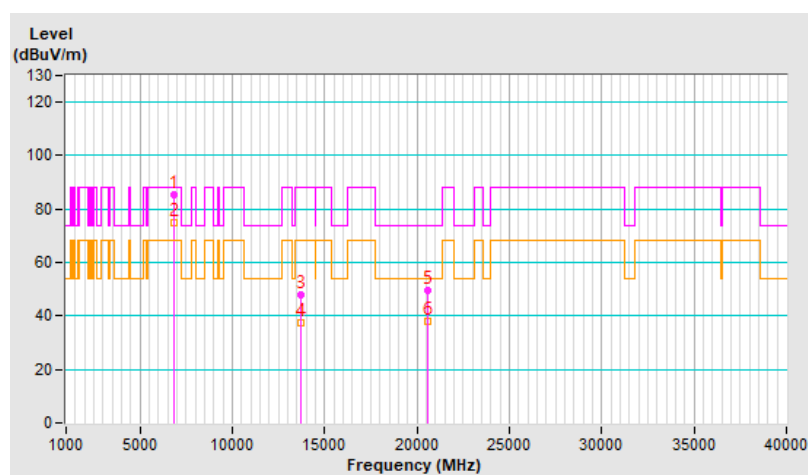


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.6 PK			1.73 V	266	89.4	8.2
2	*6855.00	87.4 AV			1.73 V	266	79.2	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.72 V	276	30.7	16.3
4	#13710.00	36.9 AV	68.2	-31.3	1.72 V	276	20.6	16.3
5	20565.00	50.0 PK	74.0	-24.0	2.63 V	191	53.7	-3.7
6	20565.00	38.3 AV	54.0	-15.7	2.63 V	191	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

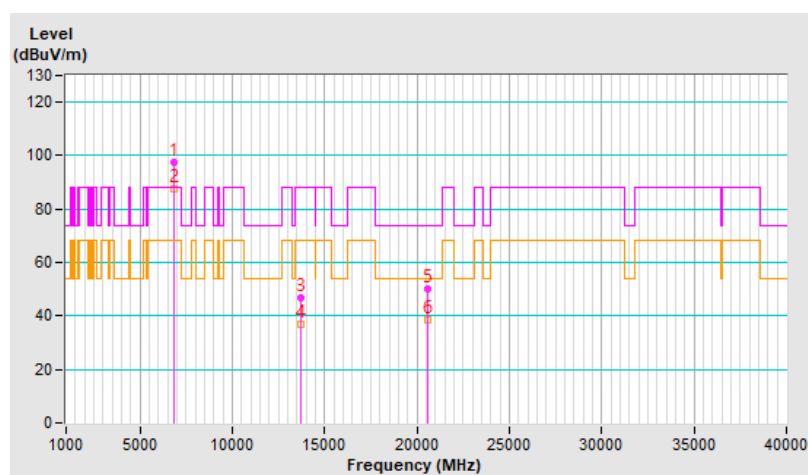


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	2.48 H	56	46.3	5.6
2	#5925.00	39.8 AV	68.2	-28.4	2.48 H	56	34.2	5.6
3	*5955.00	83.2 PK			2.48 H	56	77.7	5.5
4	*5955.00	73.3 AV			2.48 H	56	67.8	5.5
5	11910.00	47.3 PK	74.0	-26.7	1.77 H	284	32.7	14.6
6	11910.00	37.2 AV	54.0	-16.8	1.77 H	284	22.6	14.6
7	17865.00	49.4 PK	74.0	-24.6	2.55 H	136	23.5	25.9
8	17865.00	38.3 AV	54.0	-15.7	2.55 H	136	12.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

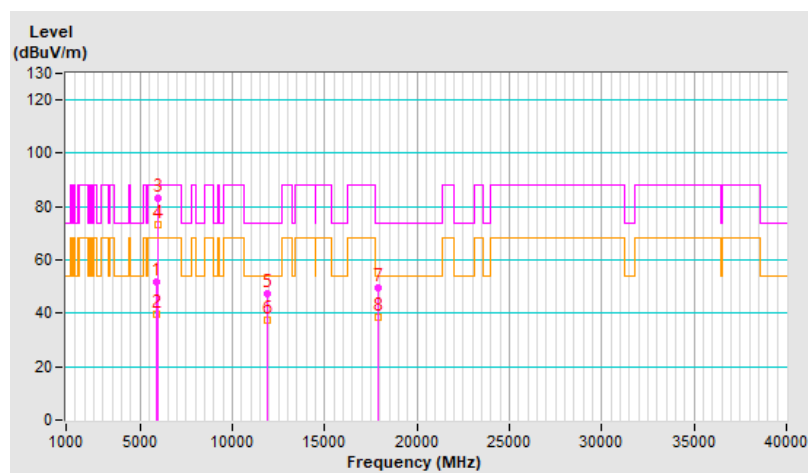


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.77 V	262	45.7	5.6
2	#5925.00	39.9 AV	68.2	-28.3	1.77 V	262	34.3	5.6
3	*5955.00	95.8 PK			1.77 V	262	90.3	5.5
4	*5955.00	86.4 AV			1.77 V	262	80.9	5.5
5	11910.00	47.4 PK	74.0	-26.6	1.73 V	290	32.8	14.6
6	11910.00	37.1 AV	54.0	-16.9	1.73 V	290	22.5	14.6
7	17865.00	50.2 PK	74.0	-23.8	2.69 V	190	24.3	25.9
8	17865.00	38.6 AV	54.0	-15.4	2.69 V	190	12.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

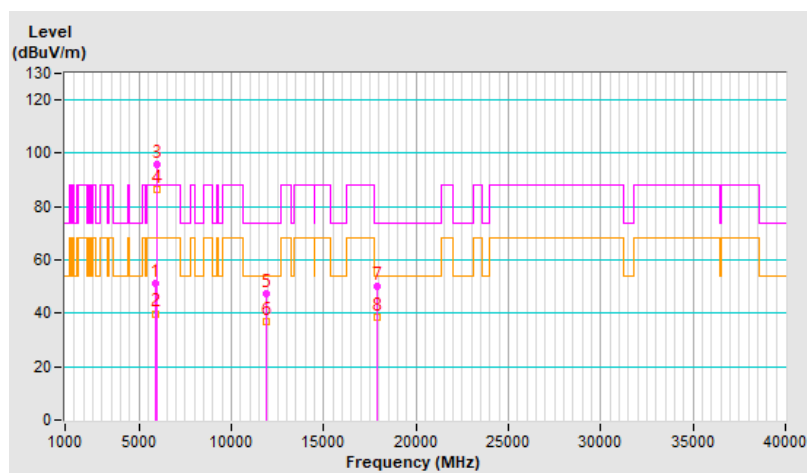


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	84.5 PK			1.38 H	50	77.7	6.8
2	*6415.00	73.8 AV			1.38 H	50	67.0	6.8
3	#12830.00	47.4 PK	88.2	-40.8	1.84 H	286	32.3	15.1
4	#12830.00	37.0 AV	68.2	-31.2	1.84 H	286	21.9	15.1
5	19245.00	48.7 PK	74.0	-25.3	2.52 H	131	53.3	-4.6
6	19245.00	37.4 AV	54.0	-16.6	2.52 H	131	42.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

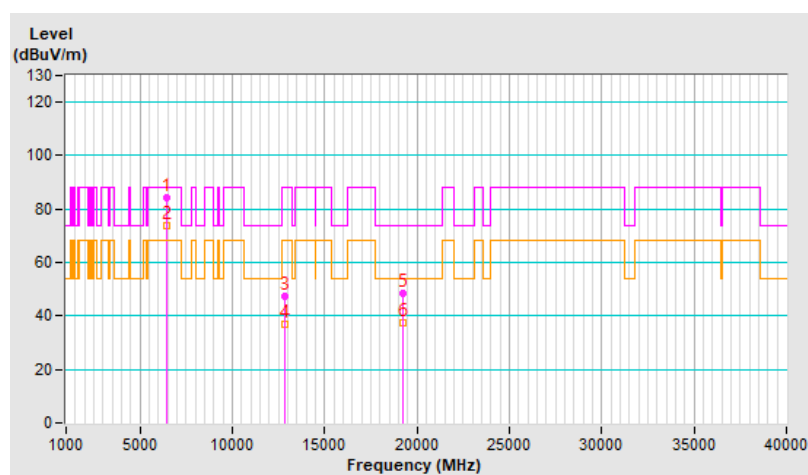


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.3 PK			1.73 V	274	88.5	6.8
2	*6415.00	86.1 AV			1.73 V	274	79.3	6.8
3	#12830.00	46.6 PK	88.2	-41.6	1.74 V	301	31.5	15.1
4	#12830.00	36.8 AV	68.2	-31.4	1.74 V	301	21.7	15.1
5	19245.00	50.6 PK	74.0	-23.4	2.64 V	190	55.2	-4.6
6	19245.00	38.8 AV	54.0	-15.2	2.64 V	190	43.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

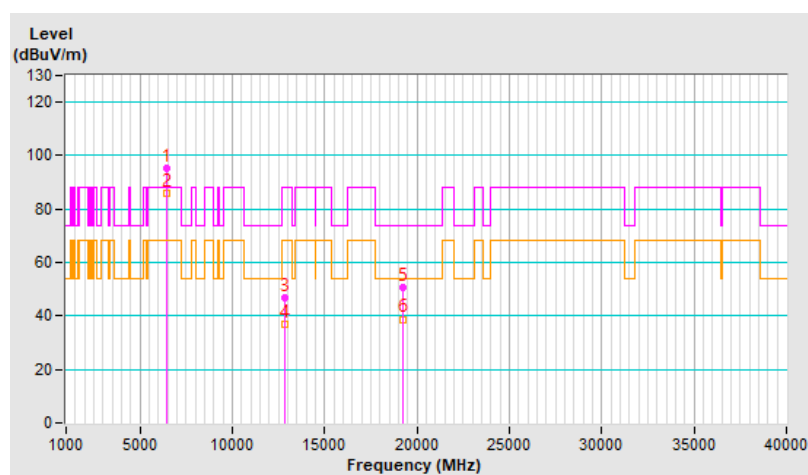


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	85.5 PK			1.42 H	54	78.1	7.4
2	*6535.00	74.5 AV			1.42 H	54	67.1	7.4
3	#13070.00	48.1 PK	88.2	-40.1	1.74 H	289	33.0	15.1
4	#13070.00	37.4 AV	68.2	-30.8	1.74 H	289	22.3	15.1
5	19605.00	49.4 PK	74.0	-24.6	2.51 H	130	54.2	-4.8
6	19605.00	38.1 AV	54.0	-15.9	2.51 H	130	42.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

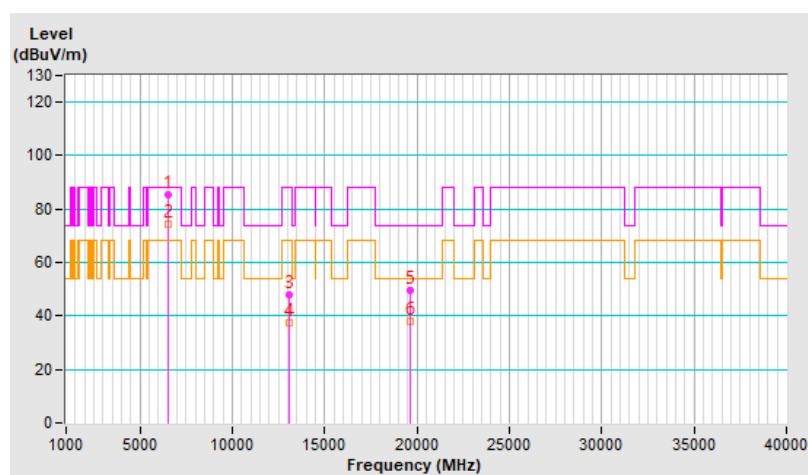


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.8 PK			1.80 V	274	88.4	7.4
2	*6535.00	86.5 AV			1.80 V	274	79.1	7.4
3	#13070.00	47.1 PK	88.2	-41.1	1.69 V	291	32.0	15.1
4	#13070.00	37.2 AV	68.2	-31.0	1.69 V	291	22.1	15.1
5	19605.00	50.3 PK	74.0	-23.7	2.59 V	173	55.1	-4.8
6	19605.00	38.4 AV	54.0	-15.6	2.59 V	173	43.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

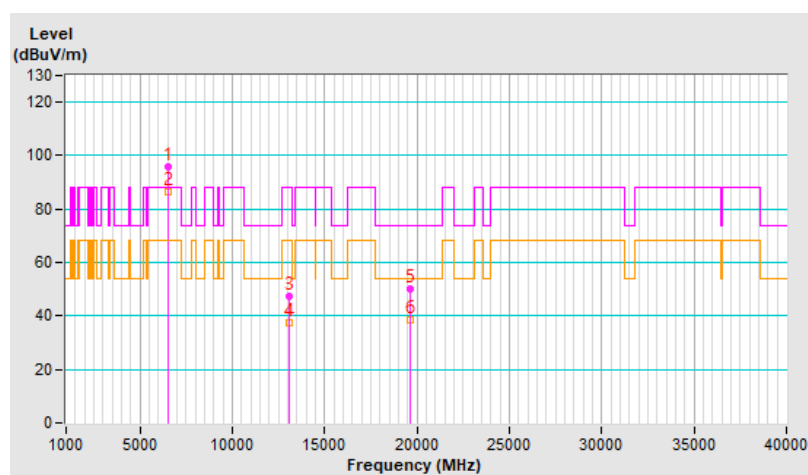


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	81.1 PK			1.34 H	49	72.9	8.2
2	*6855.00	70.6 AV			1.34 H	49	62.4	8.2
3	#13710.00	47.4 PK	88.2	-40.8	1.82 H	295	31.1	16.3
4	#13710.00	37.0 AV	68.2	-31.2	1.82 H	295	20.7	16.3
5	20565.00	49.0 PK	74.0	-25.0	2.56 H	135	52.7	-3.7
6	20565.00	37.6 AV	54.0	-16.4	2.56 H	135	41.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

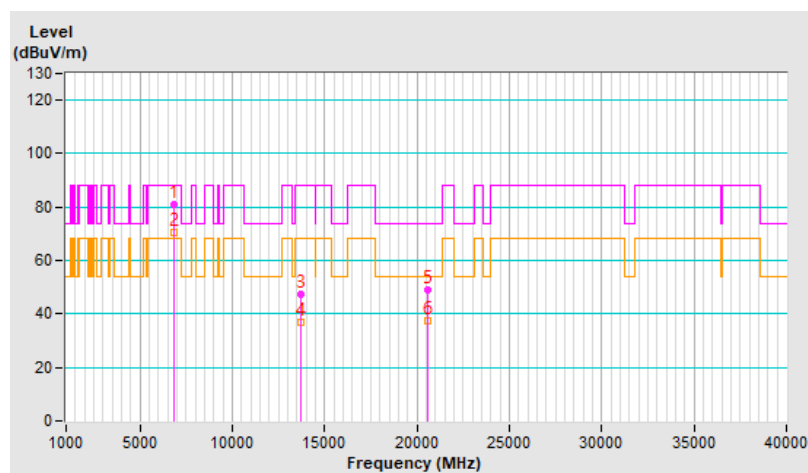


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	94.5 PK			1.66 V	264	86.3	8.2
2	*6855.00	83.7 AV			1.66 V	264	75.5	8.2
3	#13710.00	46.7 PK	88.2	-41.5	1.67 V	289	30.4	16.3
4	#13710.00	37.0 AV	68.2	-31.2	1.67 V	289	20.7	16.3
5	20565.00	50.2 PK	74.0	-23.8	2.64 V	175	53.9	-3.7
6	20565.00	38.3 AV	54.0	-15.7	2.64 V	175	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

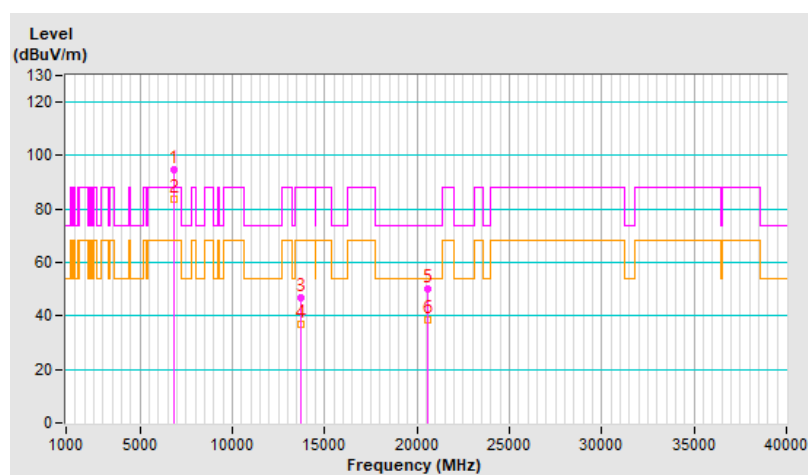


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.6 PK	88.2	-35.6	2.42 H	38	47.0	5.6
2	#5925.00	39.6 AV	68.2	-28.6	2.42 H	38	34.0	5.6
3	*5955.00	84.7 PK			2.42 H	38	79.2	5.5
4	*5955.00	73.2 AV			2.42 H	38	67.7	5.5
5	11910.00	47.8 PK	74.0	-26.2	1.79 H	295	33.2	14.6
6	11910.00	37.3 AV	54.0	-16.7	1.79 H	295	22.7	14.6
7	17865.00	49.4 PK	74.0	-24.6	2.61 H	133	23.5	25.9
8	17865.00	38.2 AV	54.0	-15.8	2.61 H	133	12.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

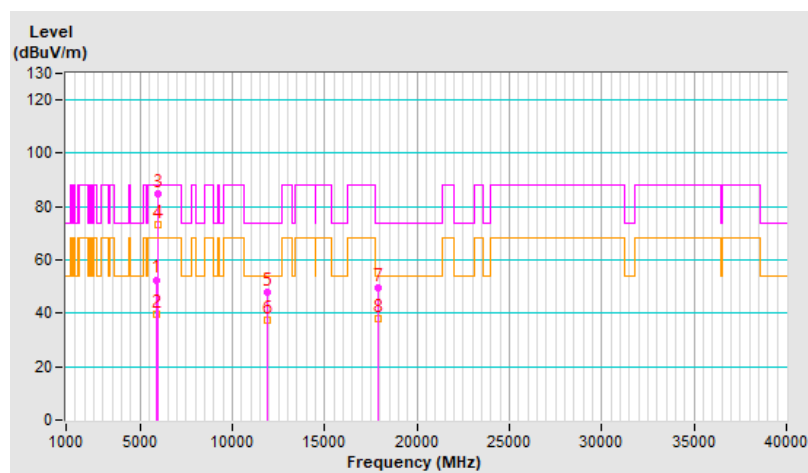


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.0 PK	88.2	-37.2	1.74 V	262	45.4	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.74 V	262	34.2	5.6
3	*5955.00	97.5 PK			1.74 V	262	92.0	5.5
4	*5955.00	87.2 AV			1.74 V	262	81.7	5.5
5	11910.00	46.1 PK	74.0	-27.9	1.66 V	287	31.5	14.6
6	11910.00	36.3 AV	54.0	-17.7	1.66 V	287	21.7	14.6
7	17865.00	50.1 PK	74.0	-23.9	2.63 V	184	24.2	25.9
8	17865.00	37.9 AV	54.0	-16.1	2.63 V	184	12.0	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

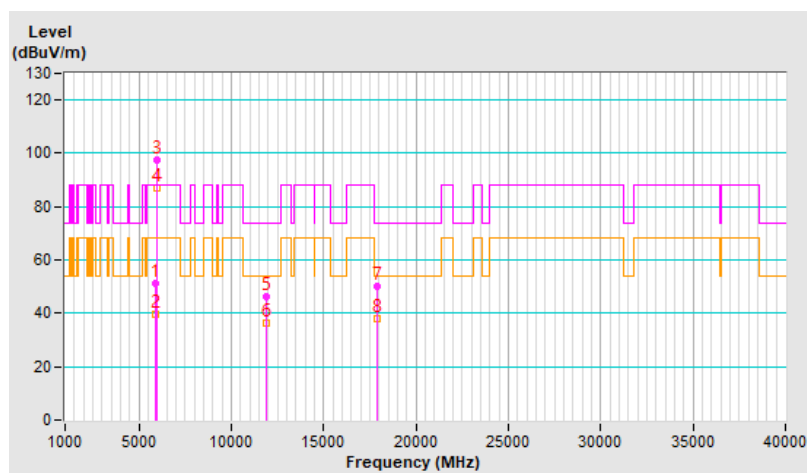


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	85.1 PK			1.40 H	51	78.3	6.8
2	*6415.00	74.1 AV			1.40 H	51	67.3	6.8
3	#12830.00	47.7 PK	88.2	-40.5	1.84 H	287	32.6	15.1
4	#12830.00	37.0 AV	68.2	-31.2	1.84 H	287	21.9	15.1
5	19245.00	49.6 PK	74.0	-24.4	2.60 H	126	54.2	-4.6
6	19245.00	38.1 AV	54.0	-15.9	2.60 H	126	42.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

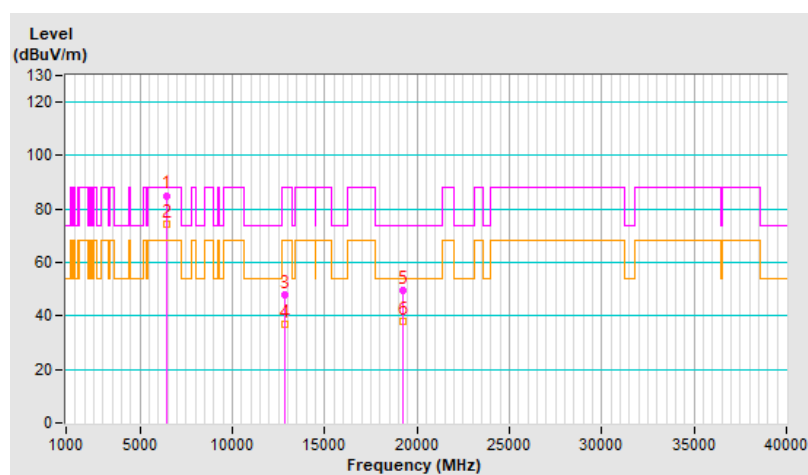


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	97.7 PK			1.70 V	277	90.9	6.8
2	*6415.00	87.5 AV			1.70 V	277	80.7	6.8
3	#12830.00	46.6 PK	88.2	-41.6	1.64 V	281	31.5	15.1
4	#12830.00	36.5 AV	68.2	-31.7	1.64 V	281	21.4	15.1
5	19245.00	50.1 PK	74.0	-23.9	2.65 V	186	54.7	-4.6
6	19245.00	38.3 AV	54.0	-15.7	2.65 V	186	42.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

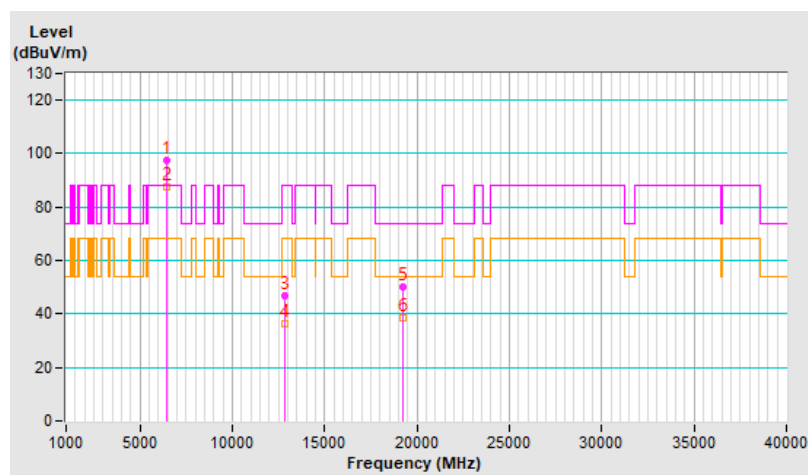


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	85.0 PK			1.40 H	44	77.6	7.4
2	*6535.00	74.3 AV			1.40 H	44	66.9	7.4
3	#13070.00	47.6 PK	88.2	-40.6	1.75 H	287	32.5	15.1
4	#13070.00	37.0 AV	68.2	-31.2	1.75 H	287	21.9	15.1
5	19605.00	48.7 PK	74.0	-25.3	2.56 H	147	53.5	-4.8
6	19605.00	37.5 AV	54.0	-16.5	2.56 H	147	42.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

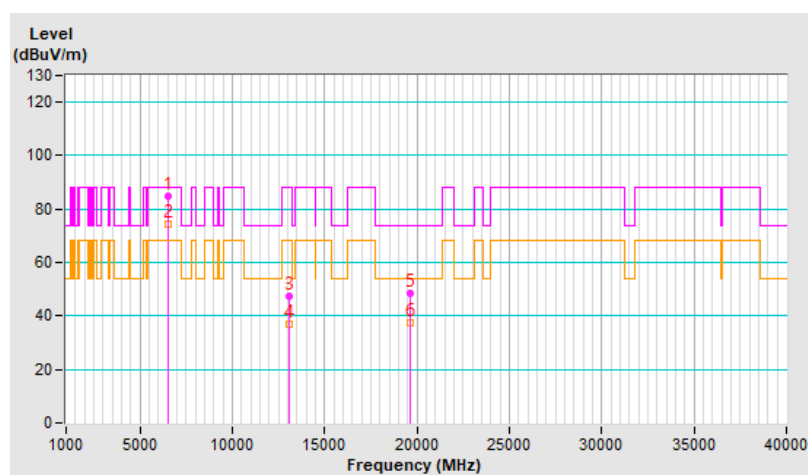


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.8 PK			1.78 V	267	90.4	7.4
2	*6535.00	87.4 AV			1.78 V	267	80.0	7.4
3	#13070.00	47.7 PK	88.2	-40.5	1.75 V	282	32.6	15.1
4	#13070.00	37.5 AV	68.2	-30.7	1.75 V	282	22.4	15.1
5	19605.00	49.8 PK	74.0	-24.2	2.51 V	137	54.6	-4.8
6	19605.00	38.1 AV	54.0	-15.9	2.51 V	137	42.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

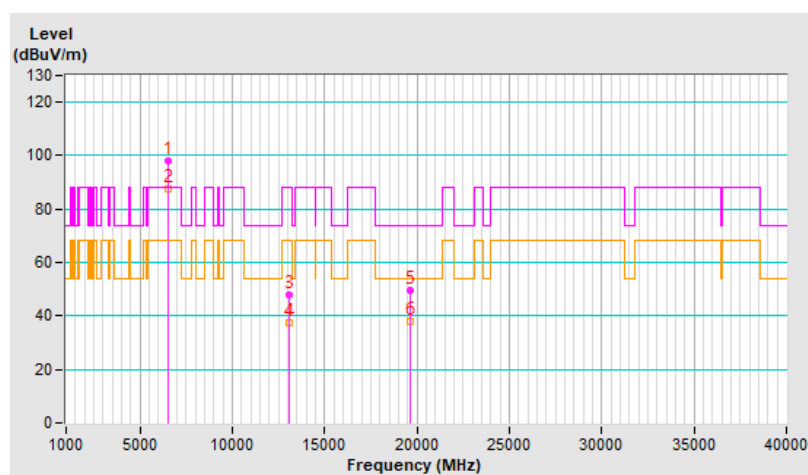


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	85.3 PK			1.41 H	47	77.1	8.2
2	*6855.00	74.3 AV			1.41 H	47	66.1	8.2
3	#13710.00	47.3 PK	88.2	-40.9	1.84 H	281	31.0	16.3
4	#13710.00	36.7 AV	68.2	-31.5	1.84 H	281	20.4	16.3
5	20565.00	49.0 PK	74.0	-25.0	2.59 H	137	52.7	-3.7
6	20565.00	37.8 AV	54.0	-16.2	2.59 H	137	41.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

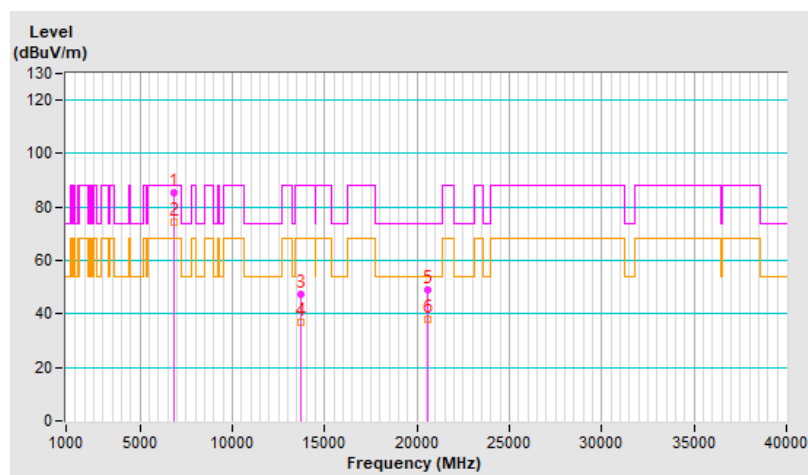


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.0 PK			1.79 V	264	88.8	8.2
2	*6855.00	86.7 AV			1.79 V	264	78.5	8.2
3	#13710.00	46.3 PK	88.2	-41.9	1.71 V	291	30.0	16.3
4	#13710.00	36.2 AV	68.2	-32.0	1.71 V	291	19.9	16.3
5	20565.00	50.1 PK	74.0	-23.9	2.68 V	197	53.8	-3.7
6	20565.00	38.0 AV	54.0	-16.0	2.68 V	197	41.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

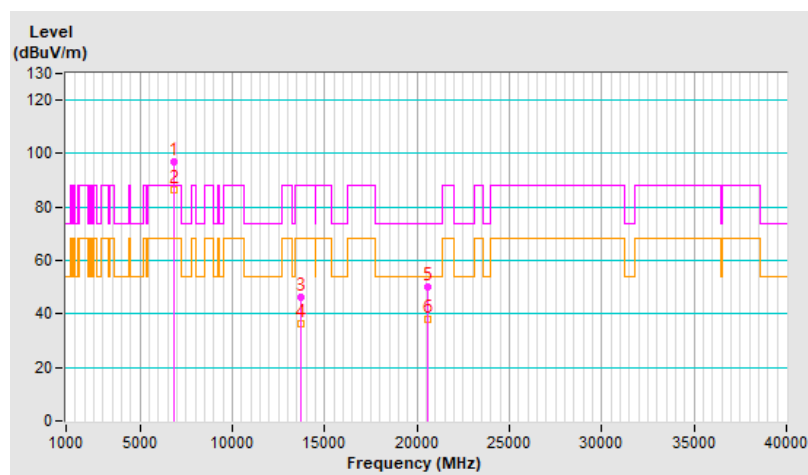


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	1.77 H	65	46.4	5.6
2	#5925.00	40.0 AV	68.2	-28.2	1.77 H	65	34.4	5.6
3	*5985.00	80.3 PK			1.77 H	65	74.8	5.5
4	*5985.00	68.4 AV			1.77 H	65	62.9	5.5
5	11970.00	47.4 PK	74.0	-26.6	1.82 H	297	32.9	14.5
6	11970.00	37.1 AV	54.0	-16.9	1.82 H	297	22.6	14.5
7	17955.00	49.3 PK	74.0	-24.7	2.57 H	133	21.0	28.3
8	17955.00	38.1 AV	54.0	-15.9	2.57 H	133	9.8	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

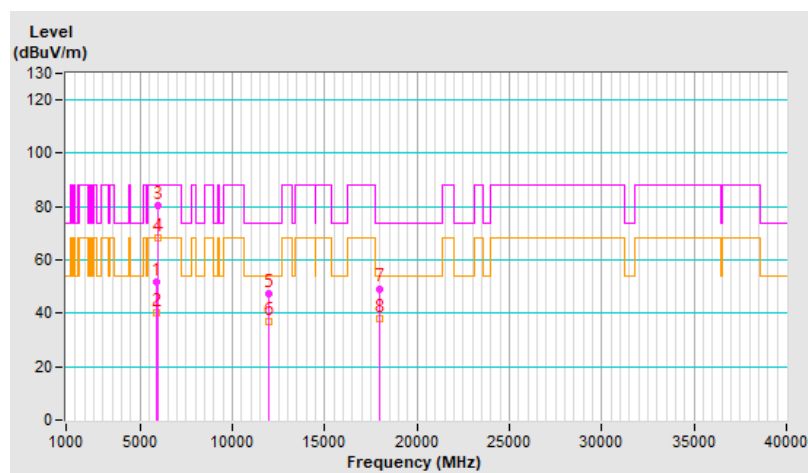


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.0 PK	88.2	-37.2	1.76 V	261	45.4	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.76 V	261	34.2	5.6
3	*5985.00	97.2 PK			1.76 V	261	91.7	5.5
4	*5985.00	86.5 AV			1.76 V	261	81.0	5.5
5	11970.00	46.7 PK	74.0	-27.3	1.70 V	298	32.2	14.5
6	11970.00	36.8 AV	54.0	-17.2	1.70 V	298	22.3	14.5
7	17955.00	50.1 PK	74.0	-23.9	2.66 V	179	21.8	28.3
8	17955.00	38.5 AV	54.0	-15.5	2.66 V	179	10.2	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

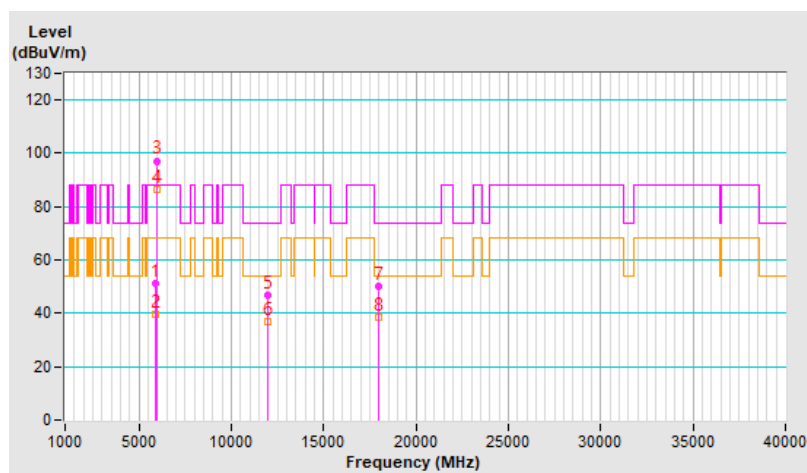


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	85.8 PK			1.47 H	48	79.2	6.6
2	*6385.00	75.1 AV			1.47 H	48	68.5	6.6
3	#12770.00	47.3 PK	88.2	-40.9	1.78 H	282	32.4	14.9
4	#12770.00	36.9 AV	68.2	-31.3	1.78 H	282	22.0	14.9
5	19155.00	49.1 PK	74.0	-24.9	2.54 H	129	53.8	-4.7
6	19155.00	37.5 AV	54.0	-16.5	2.54 H	129	42.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

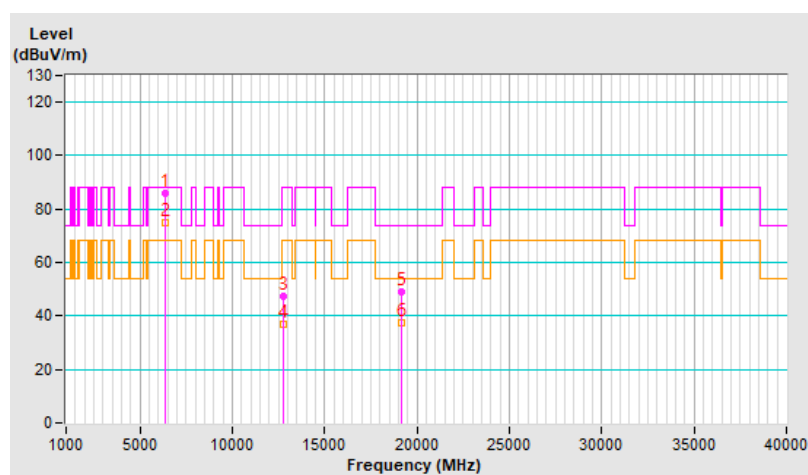


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	96.9 PK			1.81 V	261	90.3	6.6
2	*6385.00	86.3 AV			1.81 V	261	79.7	6.6
3	#12770.00	46.1 PK	88.2	-42.1	1.68 V	289	31.2	14.9
4	#12770.00	36.3 AV	68.2	-31.9	1.68 V	289	21.4	14.9
5	19155.00	49.9 PK	74.0	-24.1	2.59 V	167	54.6	-4.7
6	19155.00	37.9 AV	54.0	-16.1	2.59 V	167	42.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

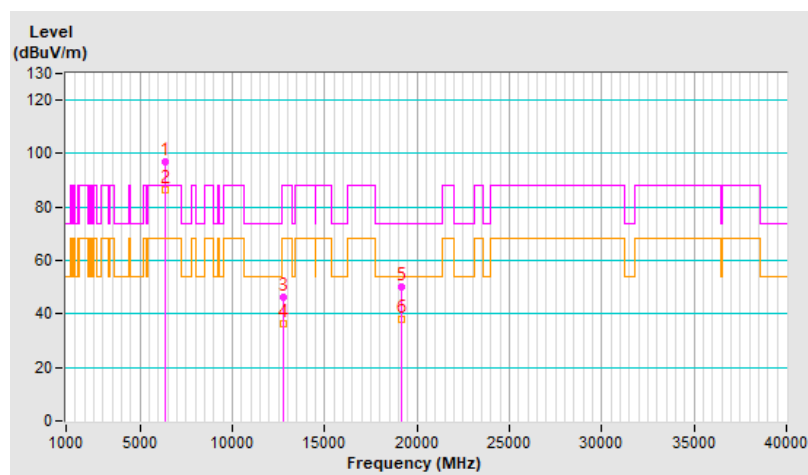


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	86.4 PK			1.39 H	34	78.6	7.8
2	*6625.00	75.4 AV			1.39 H	34	67.6	7.8
3	13250.00	47.9 PK	74.0	-26.1	1.73 H	299	32.5	15.4
4	13250.00	37.5 AV	54.0	-16.5	1.73 H	299	22.1	15.4
5	19875.00	49.0 PK	74.0	-25.0	2.53 H	138	53.5	-4.5
6	19875.00	37.7 AV	54.0	-16.3	2.53 H	138	42.2	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

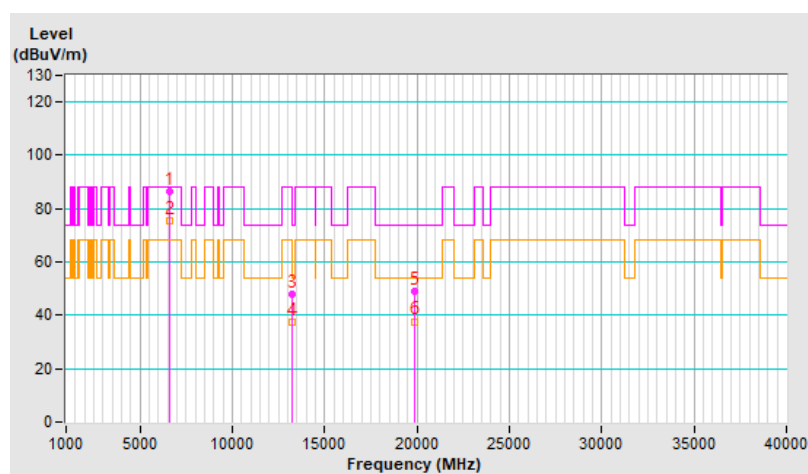


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	97.0 PK			1.73 V	254	89.2	7.8
2	*6625.00	86.3 AV			1.73 V	254	78.5	7.8
3	13250.00	46.6 PK	74.0	-27.4	1.74 V	306	31.2	15.4
4	13250.00	36.4 AV	54.0	-17.6	1.74 V	306	21.0	15.4
5	19875.00	50.1 PK	74.0	-23.9	2.61 V	196	54.6	-4.5
6	19875.00	38.3 AV	54.0	-15.7	2.61 V	196	42.8	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

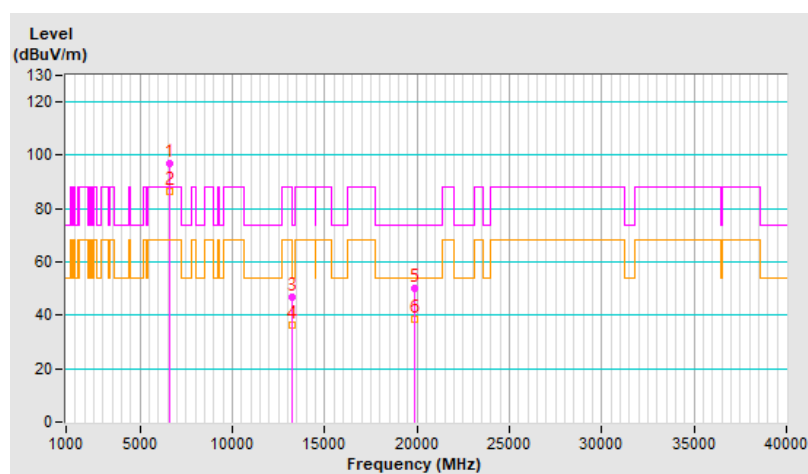


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	86.1 PK			1.45 H	47	78.4	7.7
2	*6785.00	75.2 AV			1.45 H	47	67.5	7.7
3	#13570.00	47.9 PK	88.2	-40.3	1.83 H	291	32.2	15.7
4	#13570.00	37.3 AV	68.2	-30.9	1.83 H	291	21.6	15.7
5	20355.00	49.3 PK	74.0	-24.7	2.60 H	147	53.1	-3.8
6	20355.00	37.8 AV	54.0	-16.2	2.60 H	147	41.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

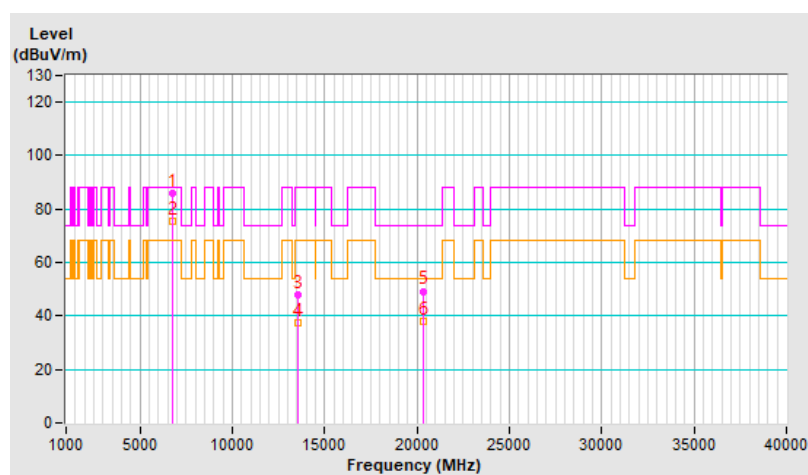


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	97.1 PK			1.82 V	264	89.4	7.7
2	*6785.00	87.6 AV			1.82 V	264	79.9	7.7
3	#13570.00	46.7 PK	88.2	-41.5	1.67 V	306	31.0	15.7
4	#13570.00	36.6 AV	68.2	-31.6	1.67 V	306	20.9	15.7
5	20355.00	50.8 PK	74.0	-23.2	2.68 V	166	54.6	-3.8
6	20355.00	38.6 AV	54.0	-15.4	2.68 V	166	42.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

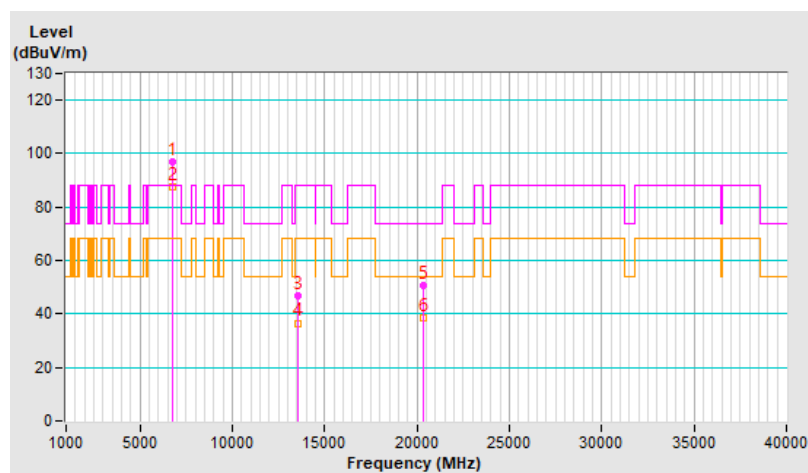


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.44 H	319	46.3	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.44 H	319	33.8	5.6
3	*6025.00	81.9 PK			1.44 H	319	76.3	5.6
4	*6025.00	70.4 AV			1.44 H	319	64.8	5.6
5	12050.00	47.4 PK	74.0	-26.6	1.79 H	292	32.8	14.6
6	12050.00	37.3 AV	54.0	-16.7	1.79 H	292	22.7	14.6
7	18075.00	49.9 PK	74.0	-24.1	2.58 H	137	55.2	-5.3
8	18075.00	38.4 AV	54.0	-15.6	2.58 H	137	43.7	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

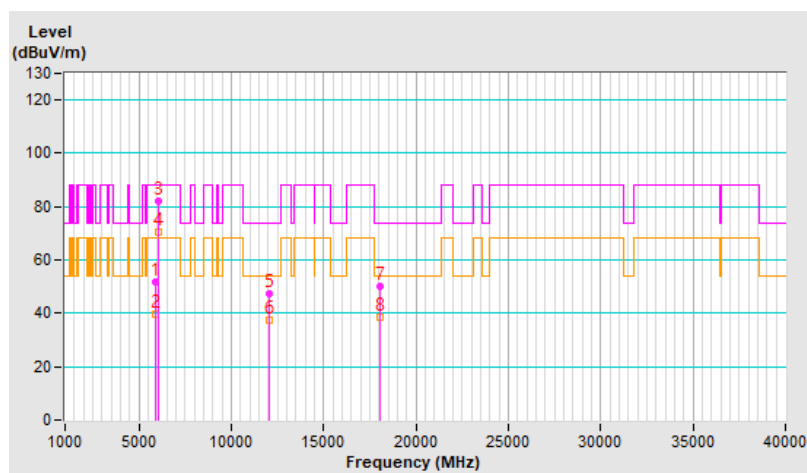


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.0 PK	88.2	-33.2	1.73 V	261	49.4	5.6
2	#5925.00	43.3 AV	68.2	-24.9	1.73 V	261	37.7	5.6
3	*6025.00	98.2 PK			1.73 V	261	92.6	5.6
4	*6025.00	87.0 AV			1.73 V	261	81.4	5.6
5	12050.00	46.6 PK	74.0	-27.4	1.65 V	287	32.0	14.6
6	12050.00	36.6 AV	54.0	-17.4	1.65 V	287	22.0	14.6
7	18075.00	50.7 PK	74.0	-23.3	2.58 V	195	56.0	-5.3
8	18075.00	38.6 AV	54.0	-15.4	2.58 V	195	43.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

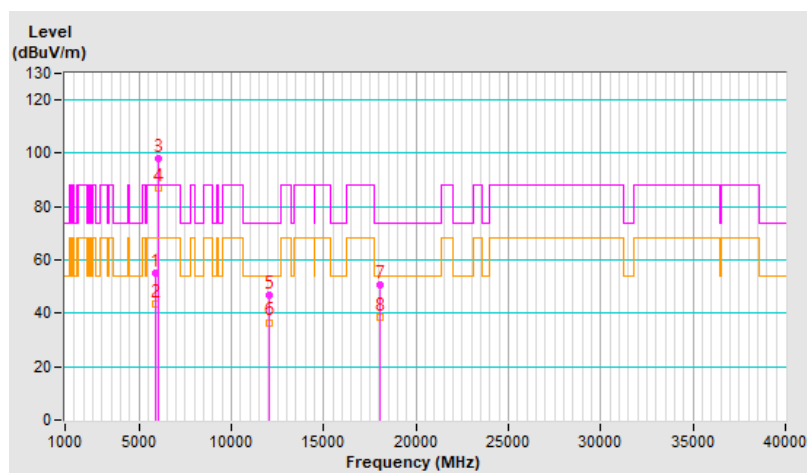


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	82.2 PK			1.52 H	52	75.8	6.4
2	*6345.00	71.1 AV			1.52 H	52	64.7	6.4
3	12690.00	47.6 PK	74.0	-26.4	1.85 H	276	32.7	14.9
4	12690.00	37.3 AV	54.0	-16.7	1.85 H	276	22.4	14.9
5	19035.00	49.3 PK	74.0	-24.7	2.58 H	143	54.2	-4.9
6	19035.00	37.9 AV	54.0	-16.1	2.58 H	143	42.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

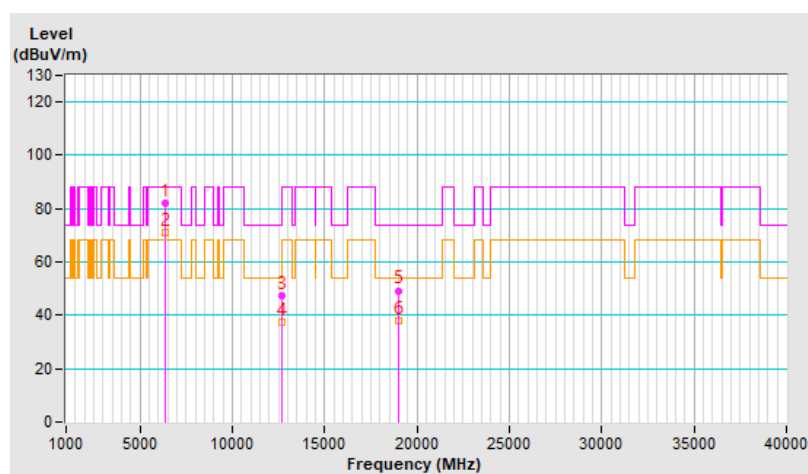


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	98.1 PK			1.76 V	269	91.7	6.4
2	*6345.00	86.9 AV			1.76 V	269	80.5	6.4
3	12690.00	46.7 PK	74.0	-27.3	1.73 V	288	31.8	14.9
4	12690.00	36.5 AV	54.0	-17.5	1.73 V	288	21.6	14.9
5	19035.00	49.6 PK	74.0	-24.4	2.57 V	170	54.5	-4.9
6	19035.00	37.8 AV	54.0	-16.2	2.57 V	170	42.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

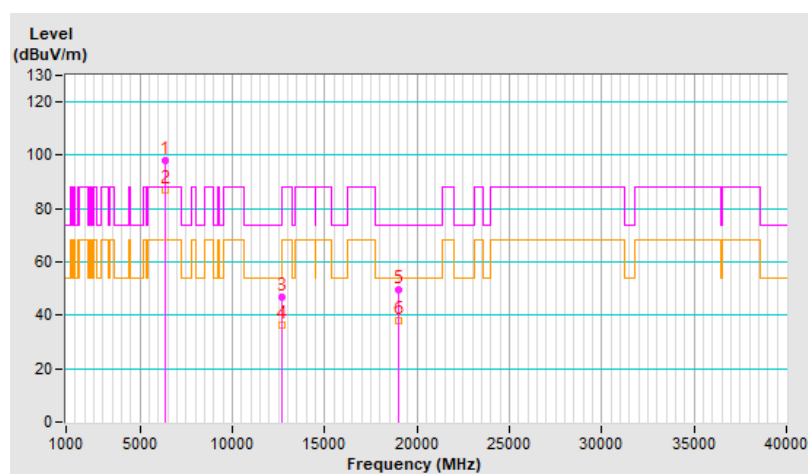


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	82.1 PK			1.52 H	51	74.3	7.8
2	*6665.00	70.8 AV			1.52 H	51	63.0	7.8
3	13330.00	47.6 PK	74.0	-26.4	1.82 H	302	32.3	15.3
4	13330.00	37.0 AV	54.0	-17.0	1.82 H	302	21.7	15.3
5	19995.00	49.8 PK	74.0	-24.2	2.60 H	130	54.2	-4.4
6	19995.00	38.3 AV	54.0	-15.7	2.60 H	130	42.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

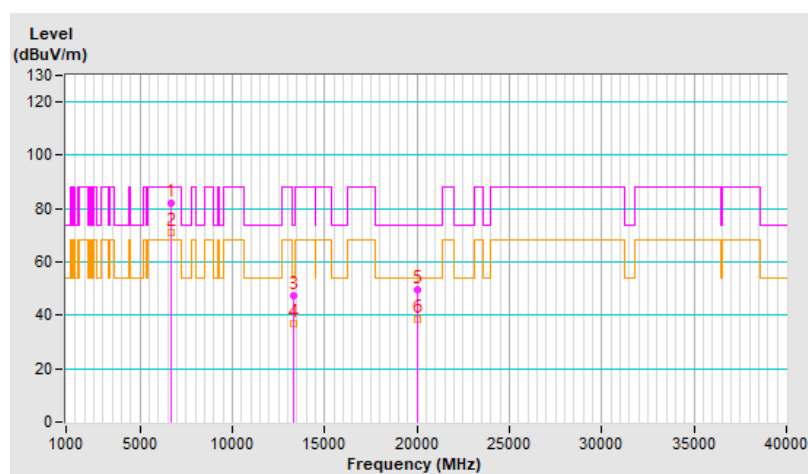


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	98.9 PK			1.82 V	263	91.1	7.8
2	*6665.00	87.5 AV			1.82 V	263	79.7	7.8
3	13330.00	46.3 PK	74.0	-27.7	1.74 V	302	31.0	15.3
4	13330.00	36.5 AV	54.0	-17.5	1.74 V	302	21.2	15.3
5	19995.00	49.9 PK	74.0	-24.1	2.68 V	185	54.3	-4.4
6	19995.00	38.1 AV	54.0	-15.9	2.68 V	185	42.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

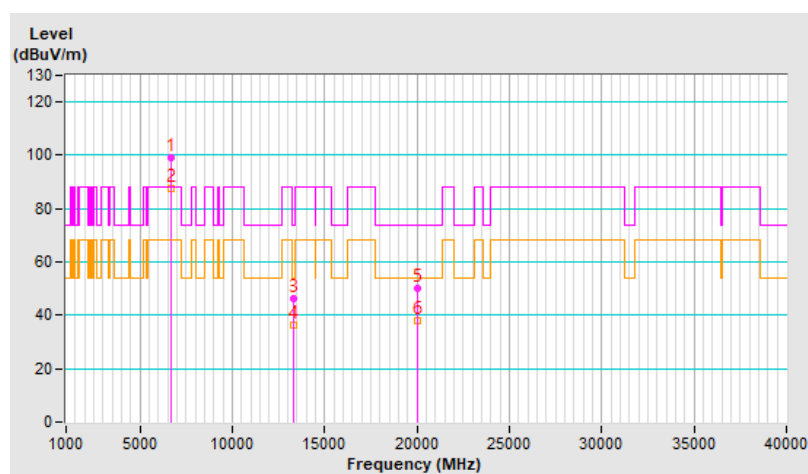


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.5 PK	88.2	-37.7	1.34 H	320	44.9	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.34 H	320	33.8	5.6
3	*6025.00	81.9 PK			1.34 H	320	76.3	5.6
4	*6025.00	69.8 AV			1.34 H	320	64.2	5.6
5	12050.00	47.2 PK	74.0	-26.8	1.84 H	297	32.6	14.6
6	12050.00	36.7 AV	54.0	-17.3	1.84 H	297	22.1	14.6
7	18075.00	49.5 PK	74.0	-24.5	2.57 H	151	54.8	-5.3
8	18075.00	38.0 AV	54.0	-16.0	2.57 H	151	43.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

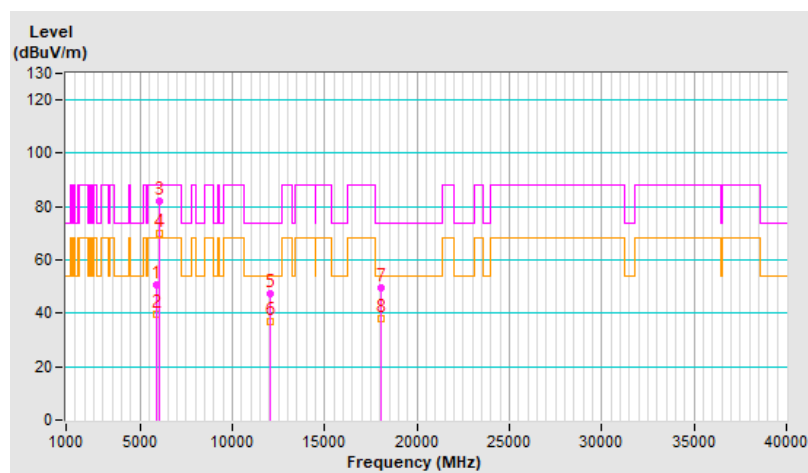


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.4 PK	88.2	-34.8	1.74 V	266	47.8	5.6
2	#5925.00	42.4 AV	68.2	-25.8	1.74 V	266	36.8	5.6
3	*6025.00	96.8 PK			1.74 V	266	91.2	5.6
4	*6025.00	85.9 AV			1.74 V	266	80.3	5.6
5	12050.00	46.9 PK	74.0	-27.1	1.72 V	295	32.3	14.6
6	12050.00	36.8 AV	54.0	-17.2	1.72 V	295	22.2	14.6
7	18075.00	50.6 PK	74.0	-23.4	2.62 V	195	55.9	-5.3
8	18075.00	38.8 AV	54.0	-15.2	2.62 V	195	44.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

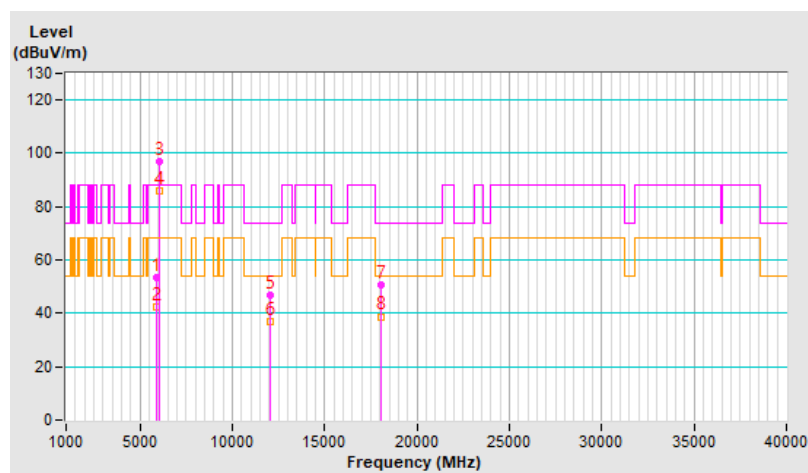


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	85.1 PK			1.55 H	52	78.7	6.4
2	*6345.00	72.0 AV			1.55 H	52	65.6	6.4
3	12690.00	47.0 PK	74.0	-27.0	1.74 H	303	32.1	14.9
4	12690.00	36.6 AV	54.0	-17.4	1.74 H	303	21.7	14.9
5	19035.00	49.5 PK	74.0	-24.5	2.59 H	131	54.4	-4.9
6	19035.00	37.8 AV	54.0	-16.2	2.59 H	131	42.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

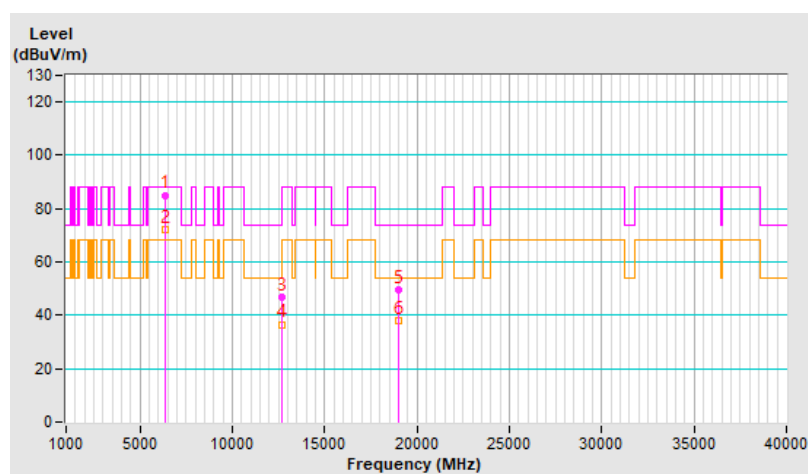


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.5 PK			1.71 V	257	90.1	6.4
2	*6345.00	85.8 AV			1.71 V	257	79.4	6.4
3	12690.00	46.7 PK	74.0	-27.3	1.68 V	277	31.8	14.9
4	12690.00	36.7 AV	54.0	-17.3	1.68 V	277	21.8	14.9
5	19035.00	50.6 PK	74.0	-23.4	2.63 V	182	55.5	-4.9
6	19035.00	38.6 AV	54.0	-15.4	2.63 V	182	43.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

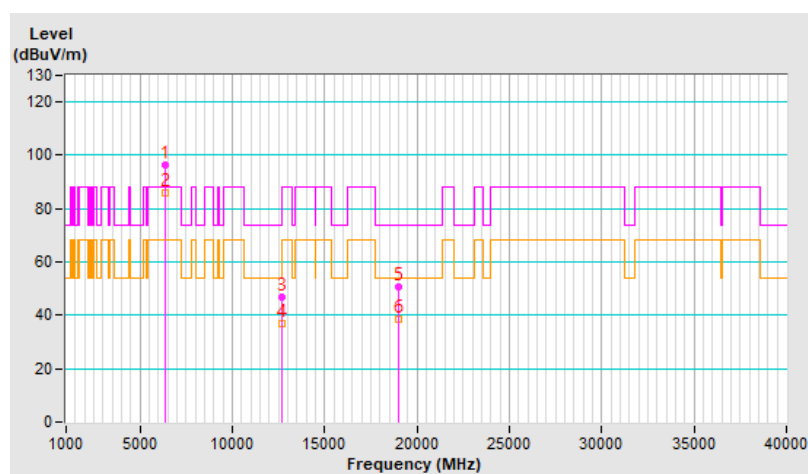


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	84.7 PK			1.55 H	55	76.9	7.8
2	*6665.00	71.6 AV			1.55 H	55	63.8	7.8
3	13330.00	47.2 PK	74.0	-26.8	1.82 H	275	31.9	15.3
4	13330.00	36.7 AV	54.0	-17.3	1.82 H	275	21.4	15.3
5	19995.00	49.8 PK	74.0	-24.2	2.61 H	137	54.2	-4.4
6	19995.00	38.3 AV	54.0	-15.7	2.61 H	137	42.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

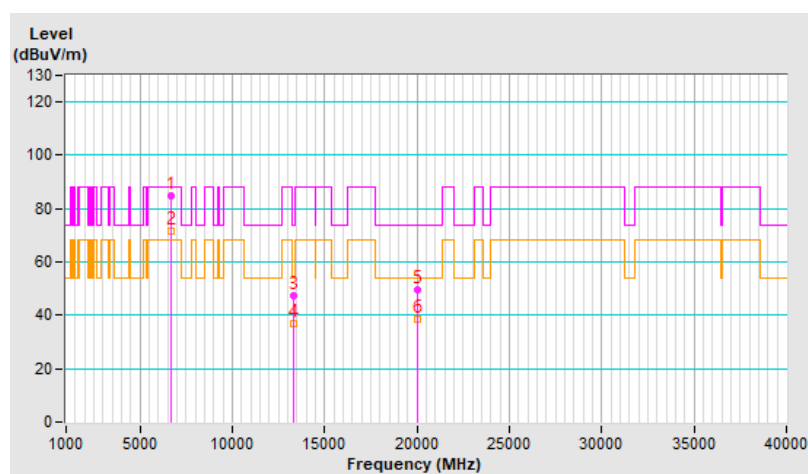


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	99.5 PK			1.83 V	264	91.7	7.8
2	*6665.00	88.6 AV			1.83 V	264	80.8	7.8
3	13330.00	46.7 PK	74.0	-27.3	1.69 V	291	31.4	15.3
4	13330.00	36.7 AV	54.0	-17.3	1.69 V	291	21.4	15.3
5	19995.00	50.2 PK	74.0	-23.8	2.63 V	182	54.6	-4.4
6	19995.00	38.3 AV	54.0	-15.7	2.63 V	182	42.7	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

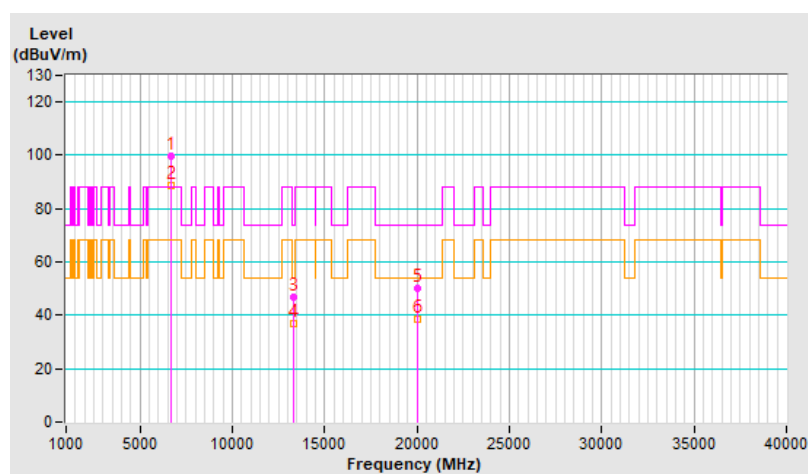


Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11a Channel 1

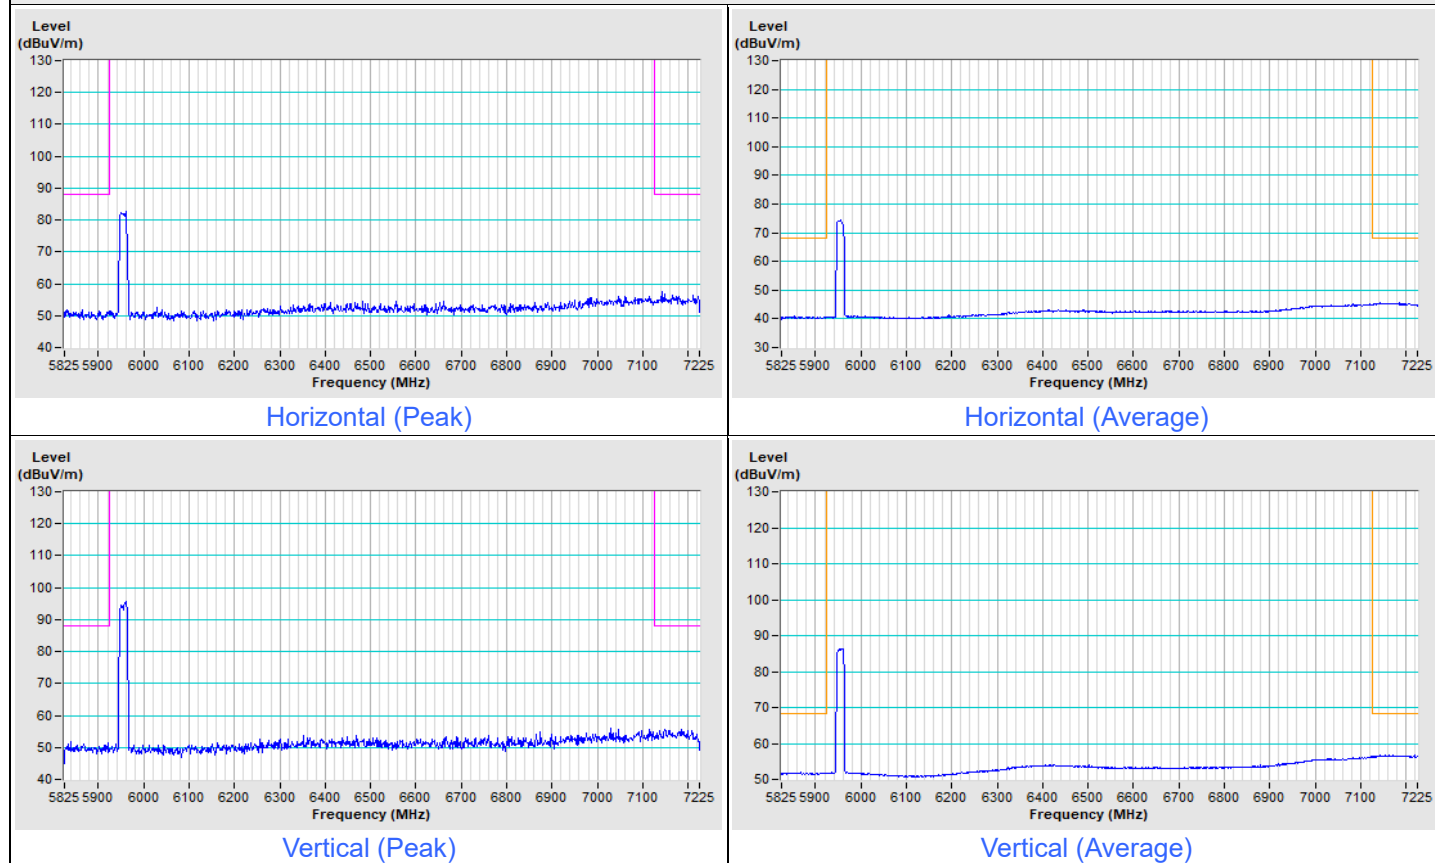


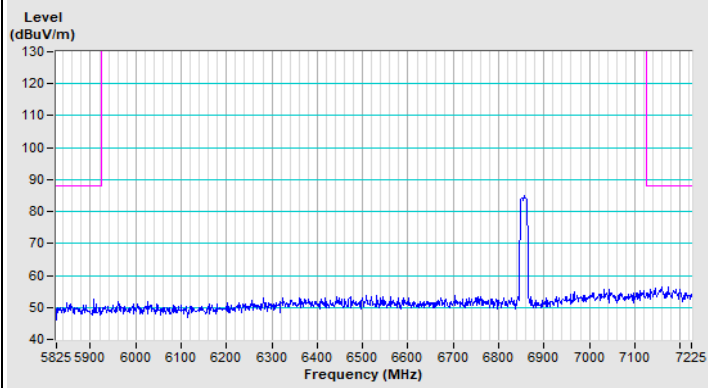802.11a Channel 181


Horizontal (Peak)

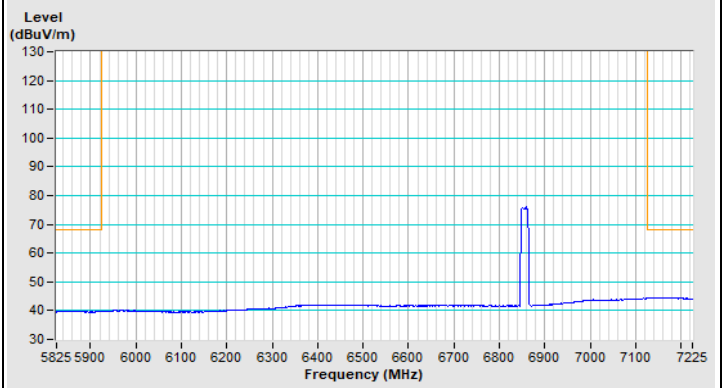

Horizontal (Average)

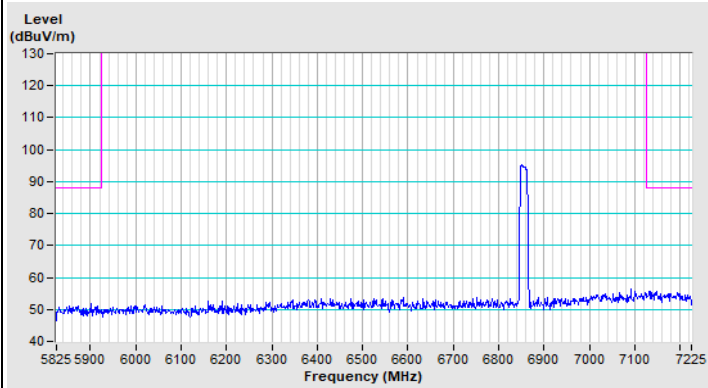


Vertical (Peak)

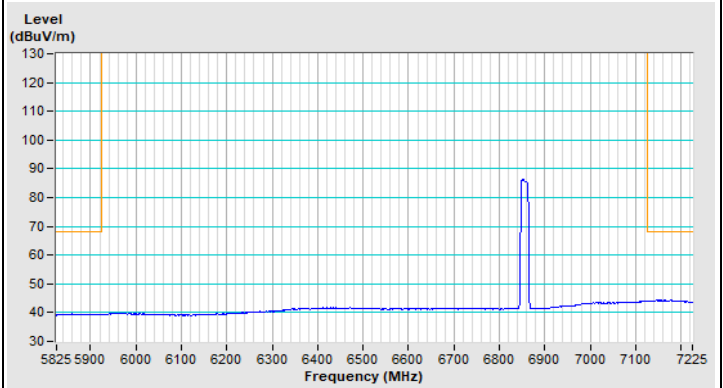


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) Channel 1

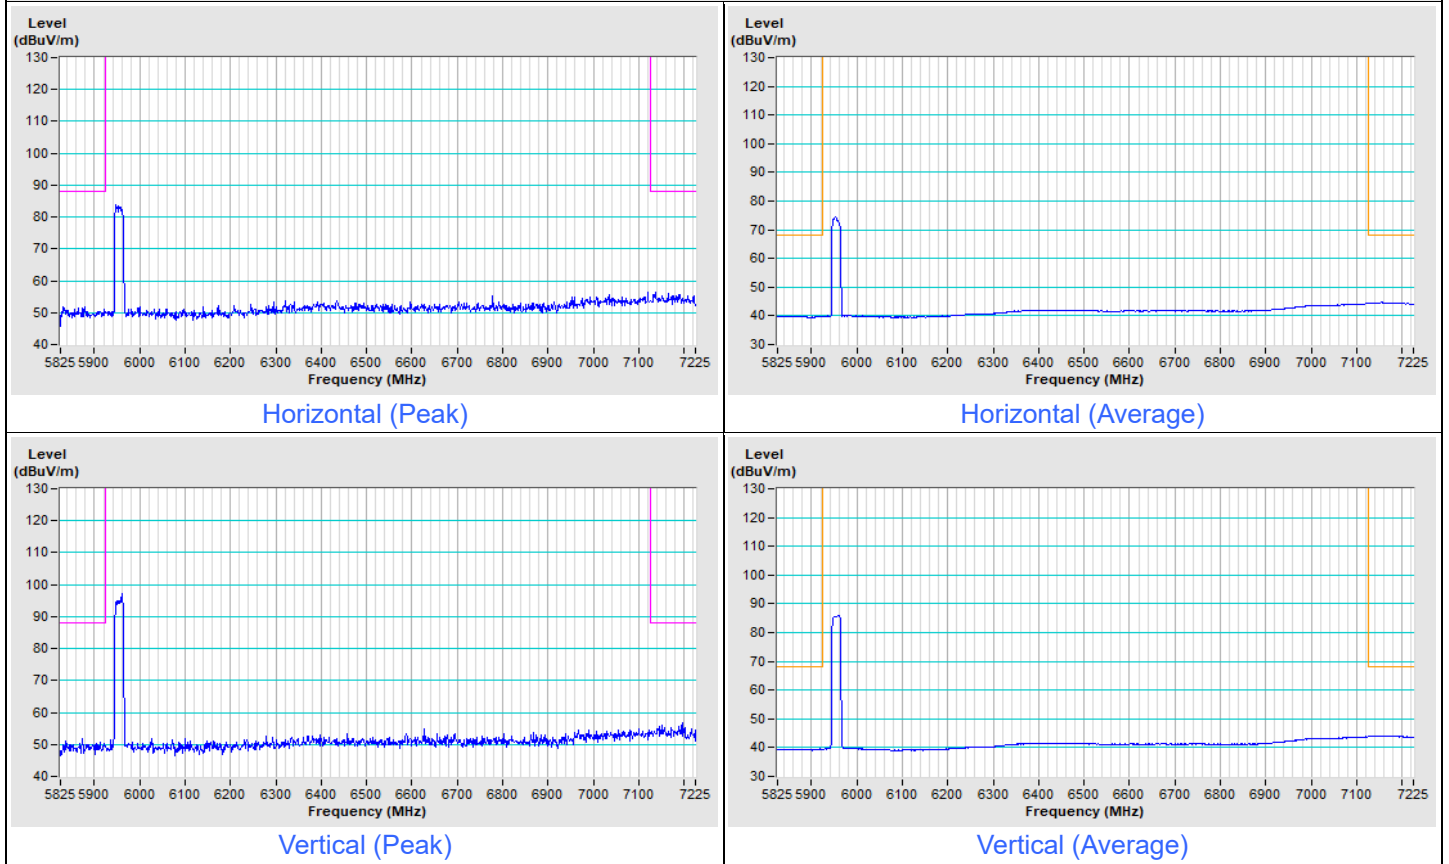


802.11be (EHT20) Channel 181

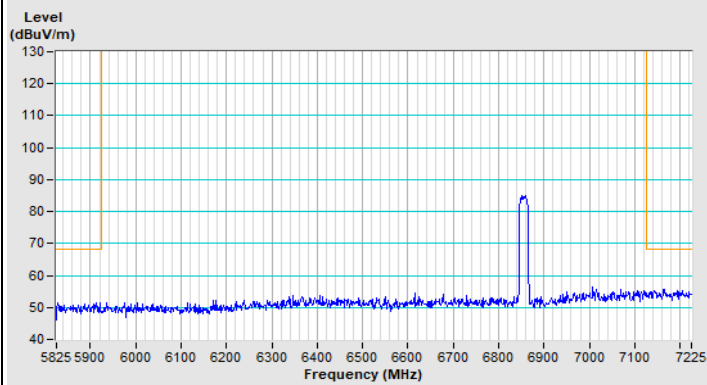


Horizontal (Peak)

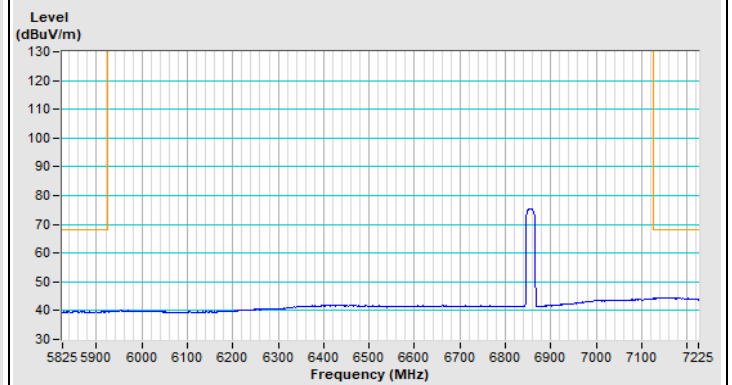

Horizontal (Average)

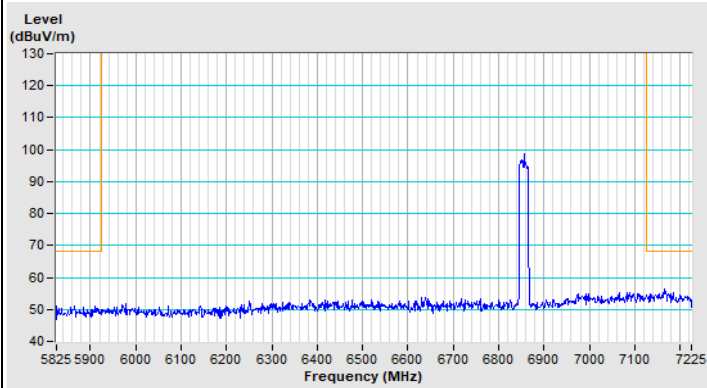


Vertical (Peak)

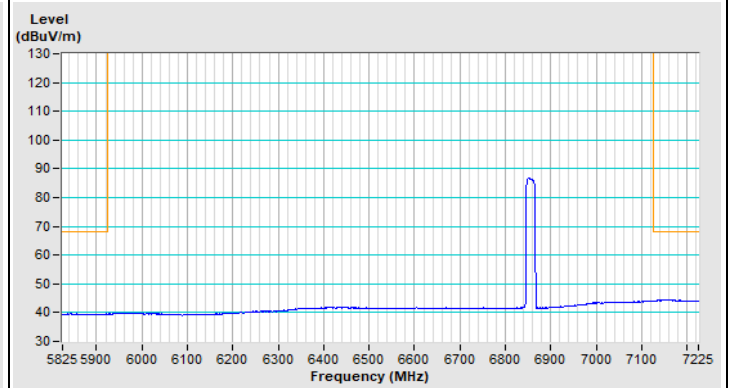


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT40) Channel 3

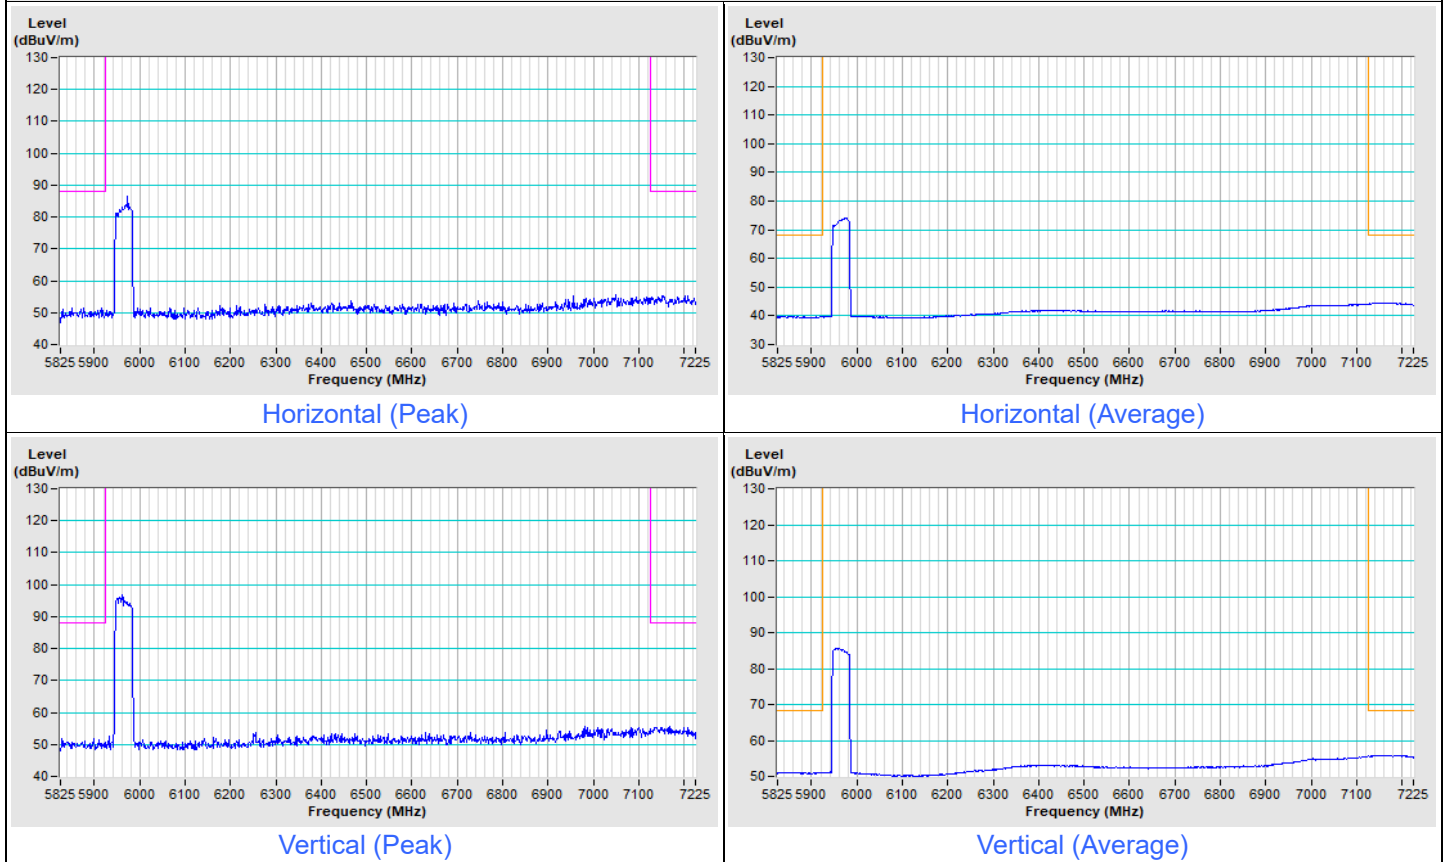


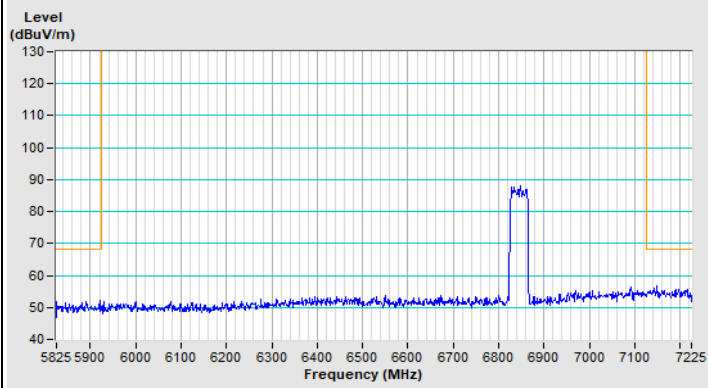802.11be (EHT40) Channel 179


Horizontal (Peak)

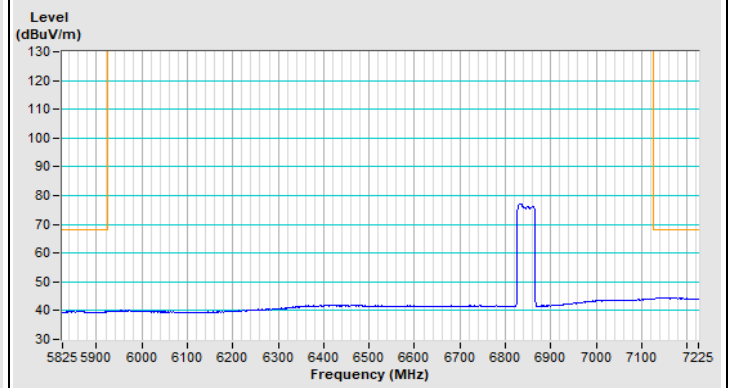

Horizontal (Average)

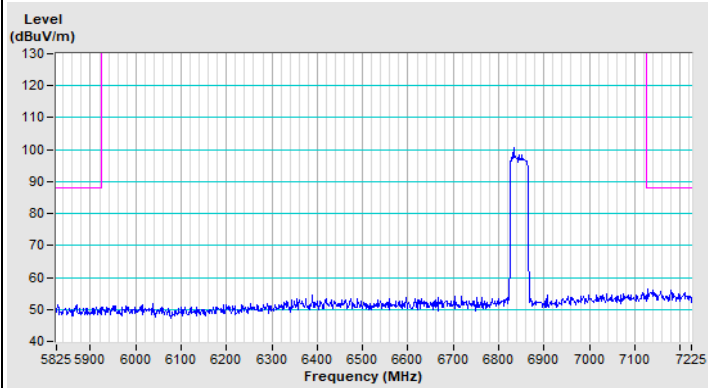


Vertical (Peak)

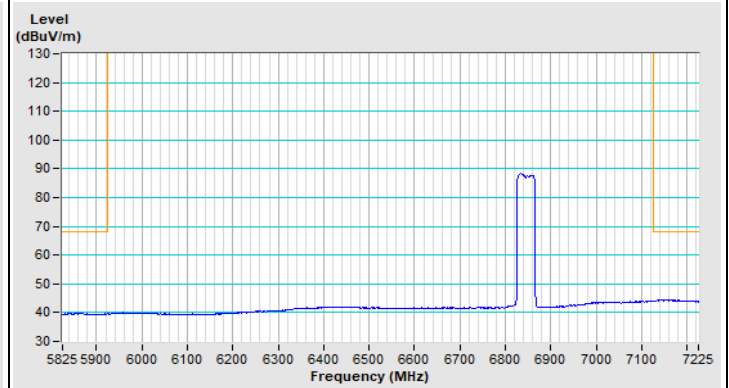


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 7

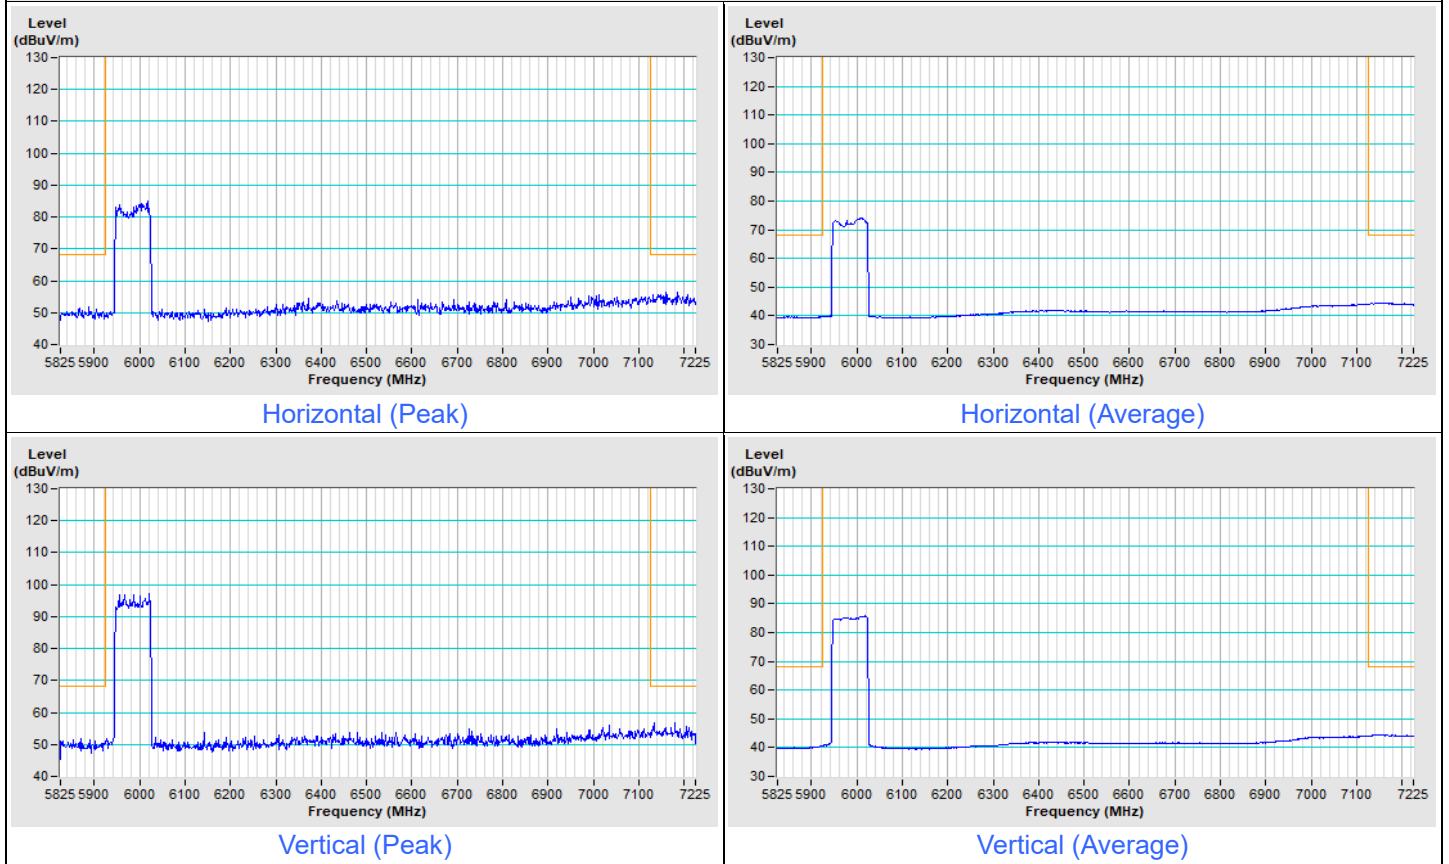


802.11be (EHT80) Channel 167

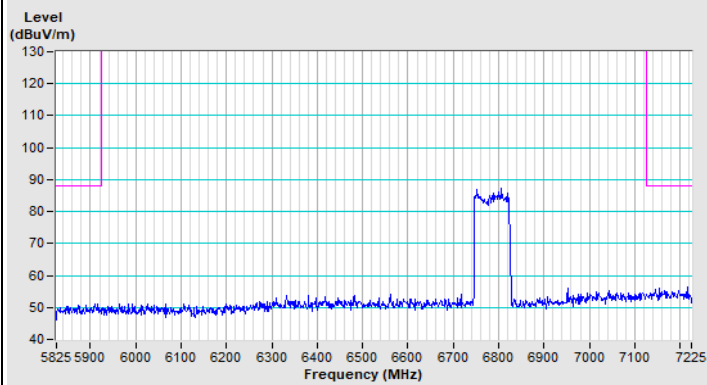


Horizontal (Peak)

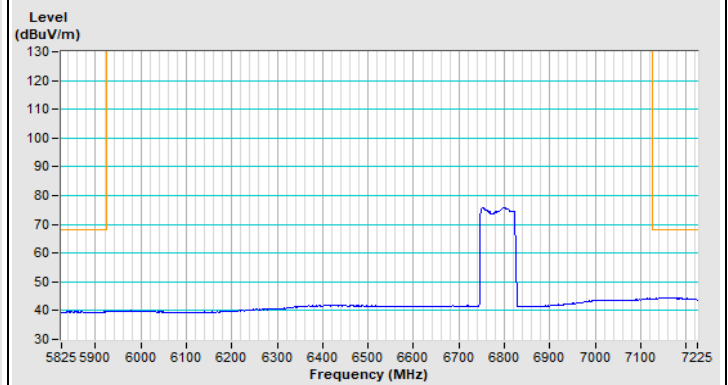

Horizontal (Average)

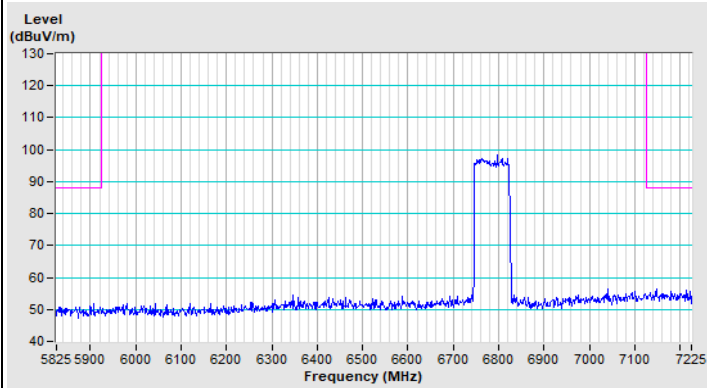


Vertical (Peak)

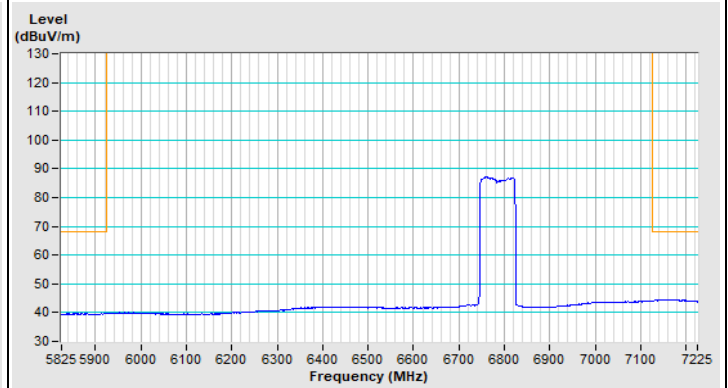


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 15

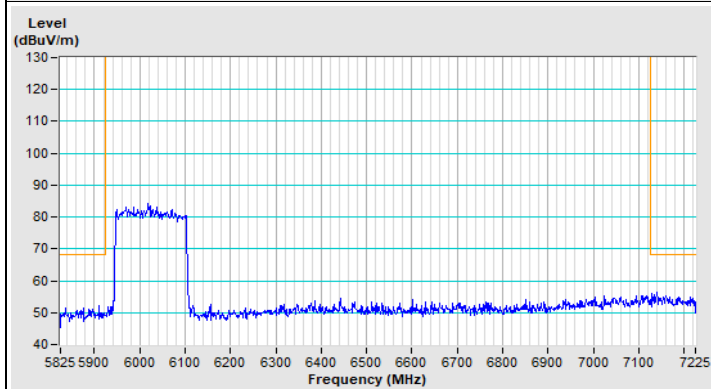


Horizontal (Peak)

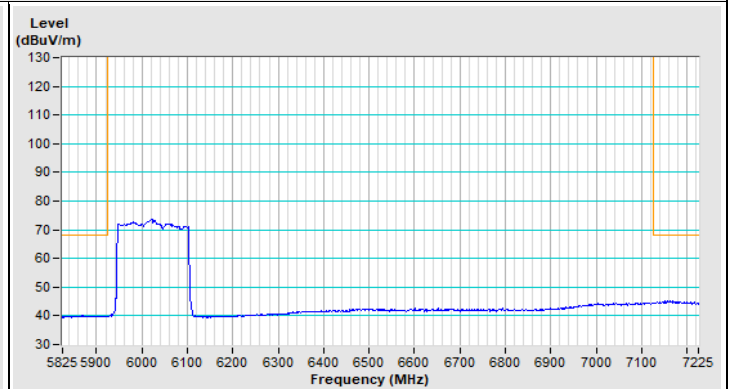

Horizontal (Average)

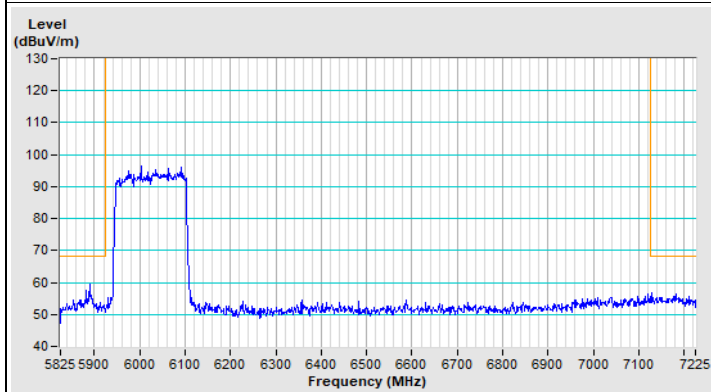


Vertical (Peak)

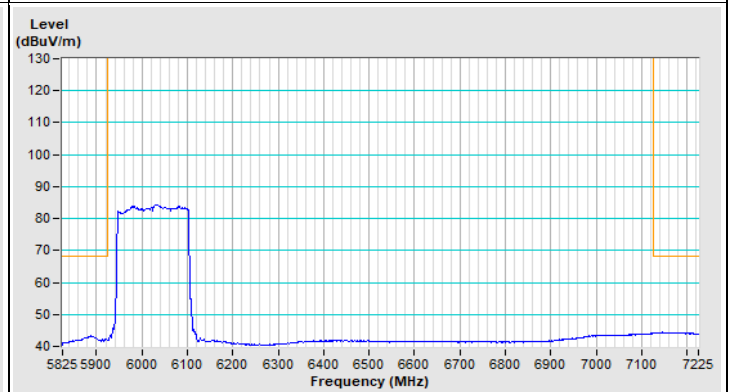


Vertical (Average)


802.11be (EHT160) Channel 143

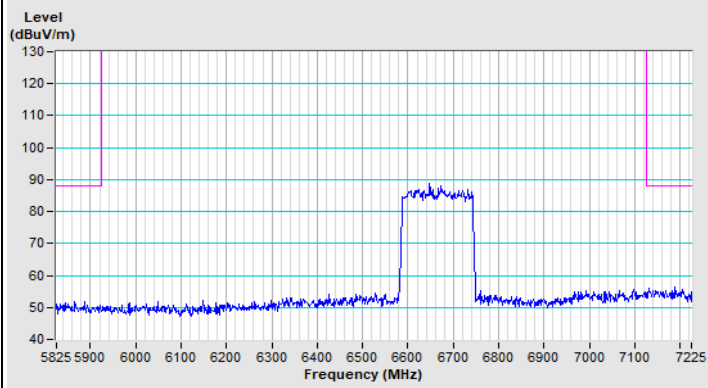


Horizontal (Peak)

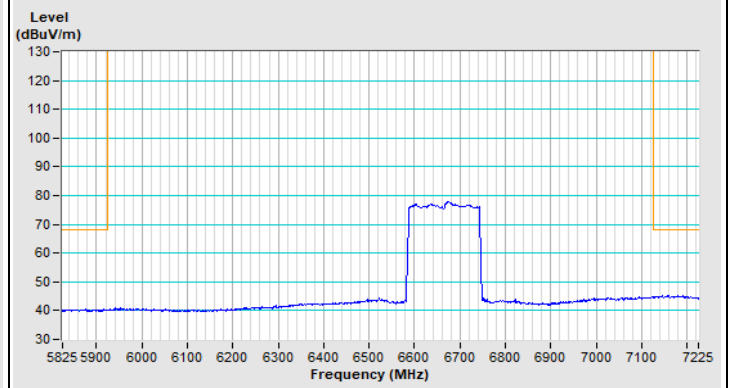

Horizontal (Average)

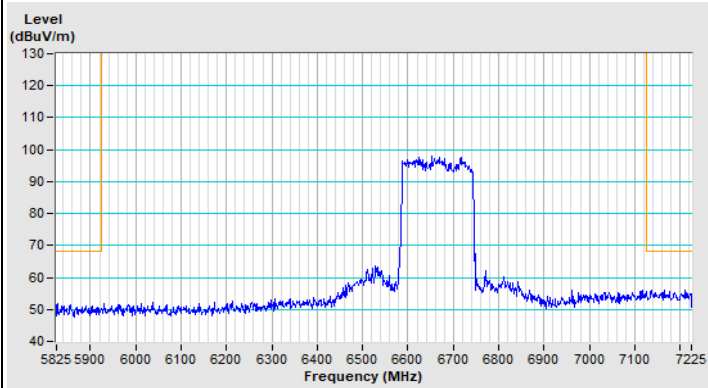


Vertical (Peak)

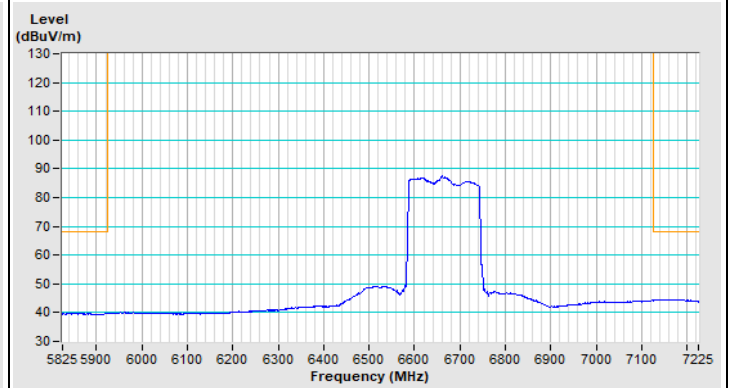


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

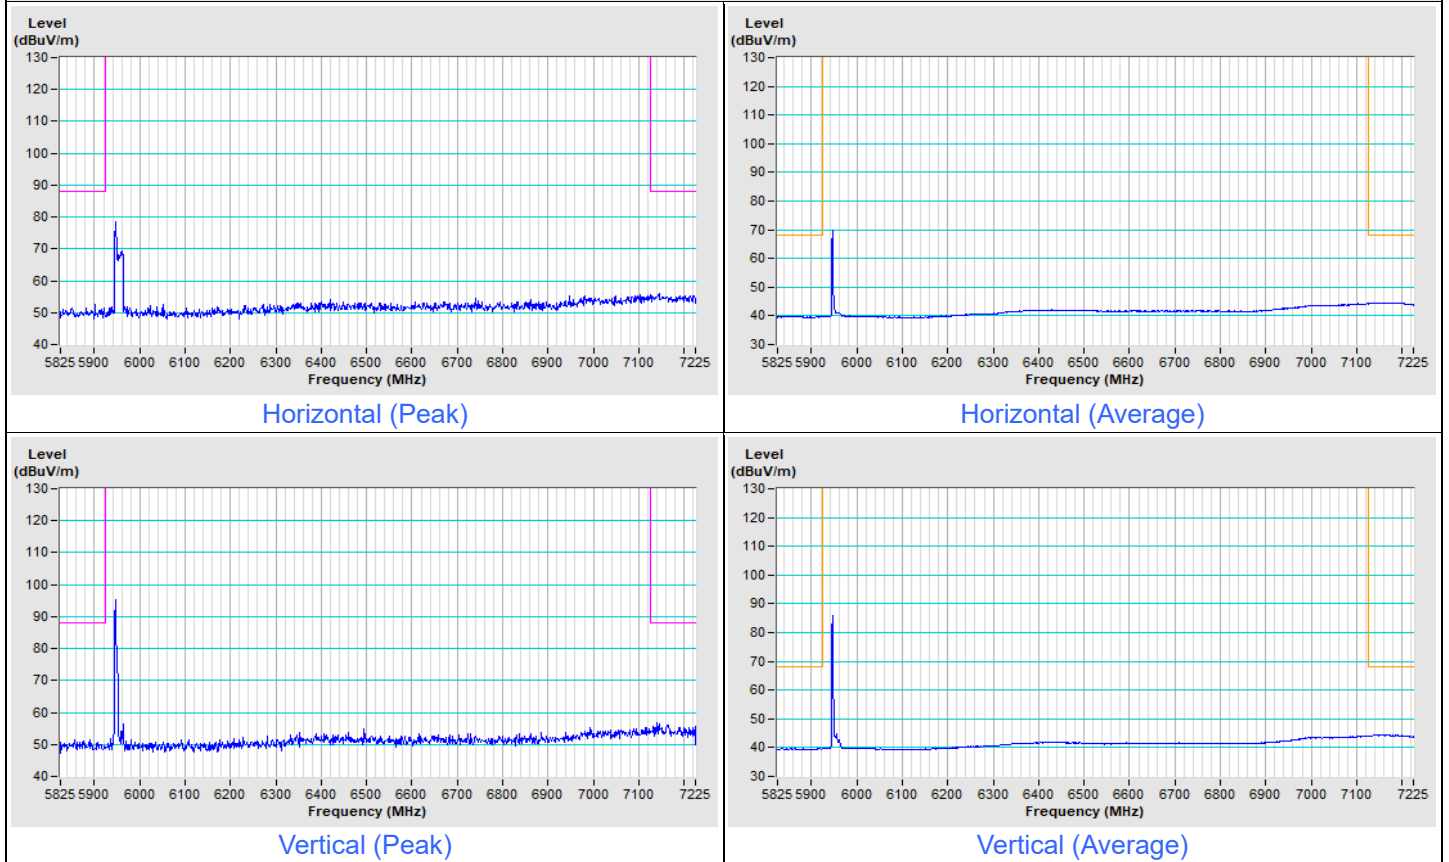


802.11be (EHT20) 26-tone RU Channel 181

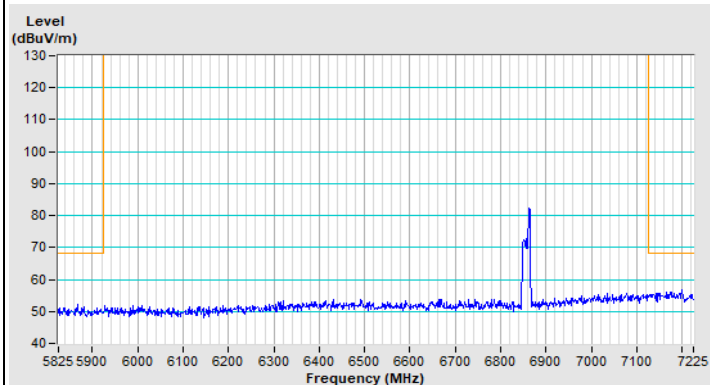


Horizontal (Peak)

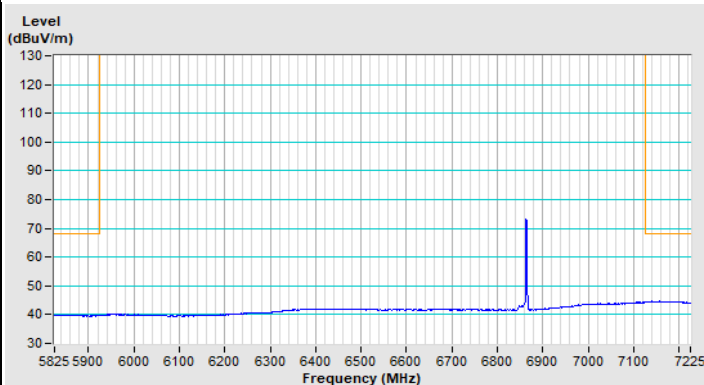

Horizontal (Average)

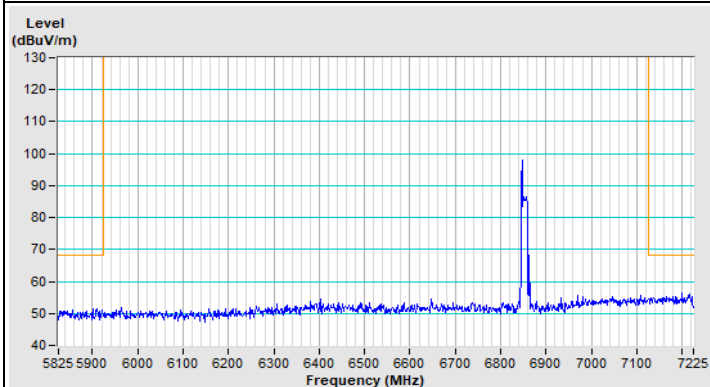


Vertical (Peak)

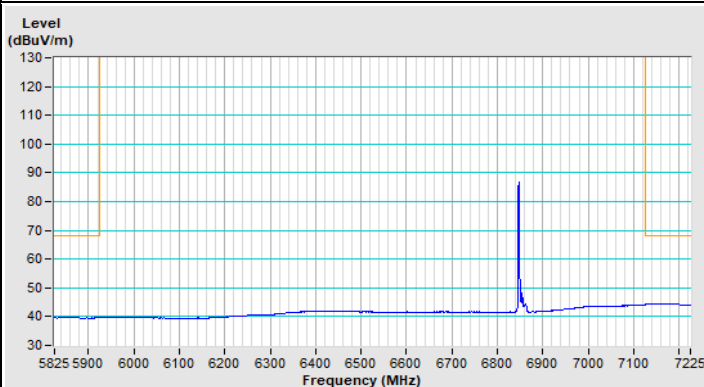


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

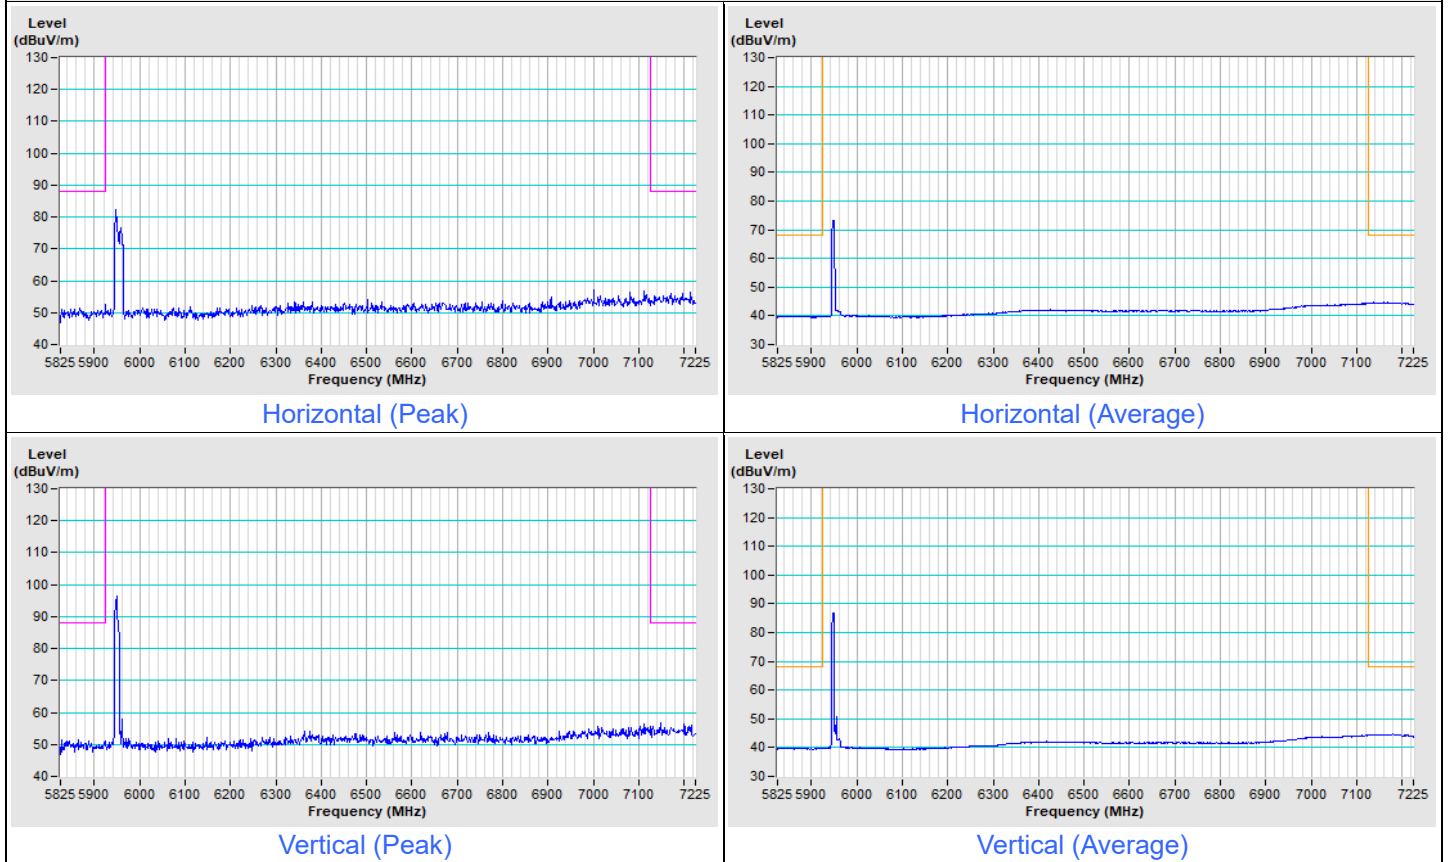


802.11be (EHT20) 52-tone RU Channel 181

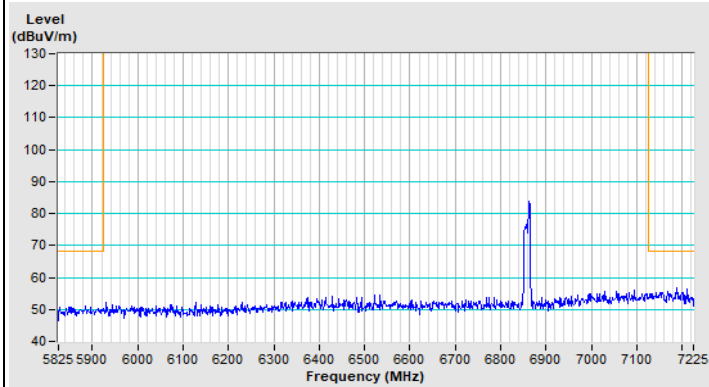


Horizontal (Peak)

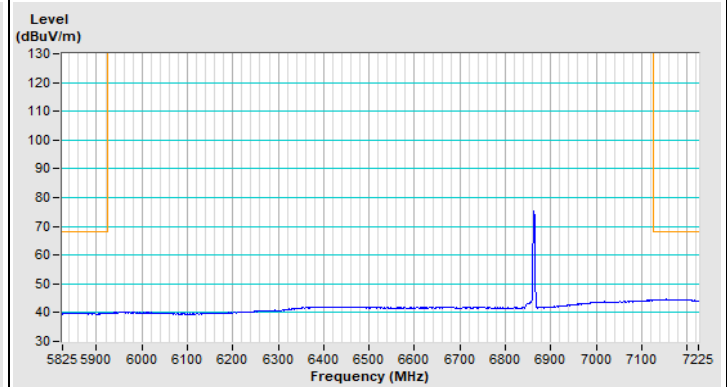

Horizontal (Average)

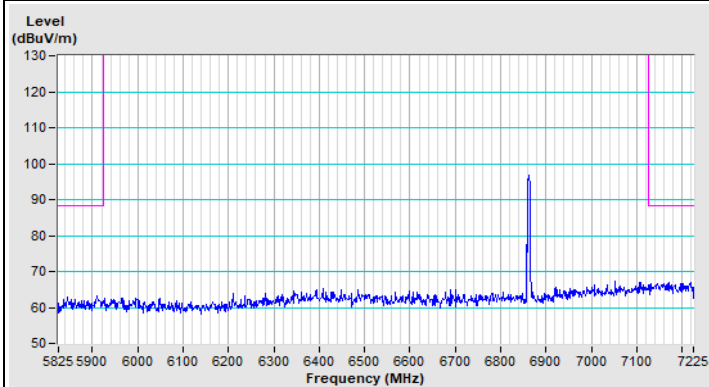


Vertical (Peak)

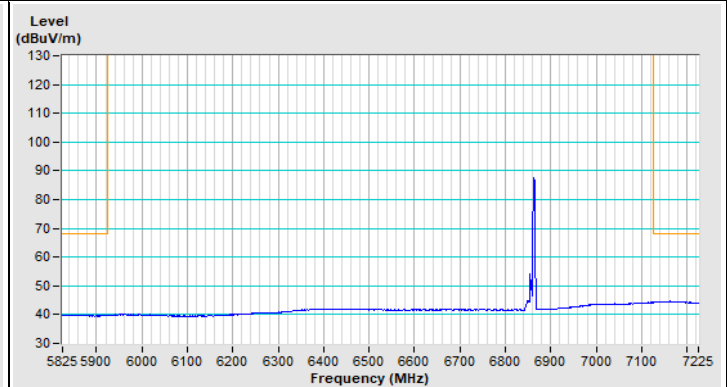


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

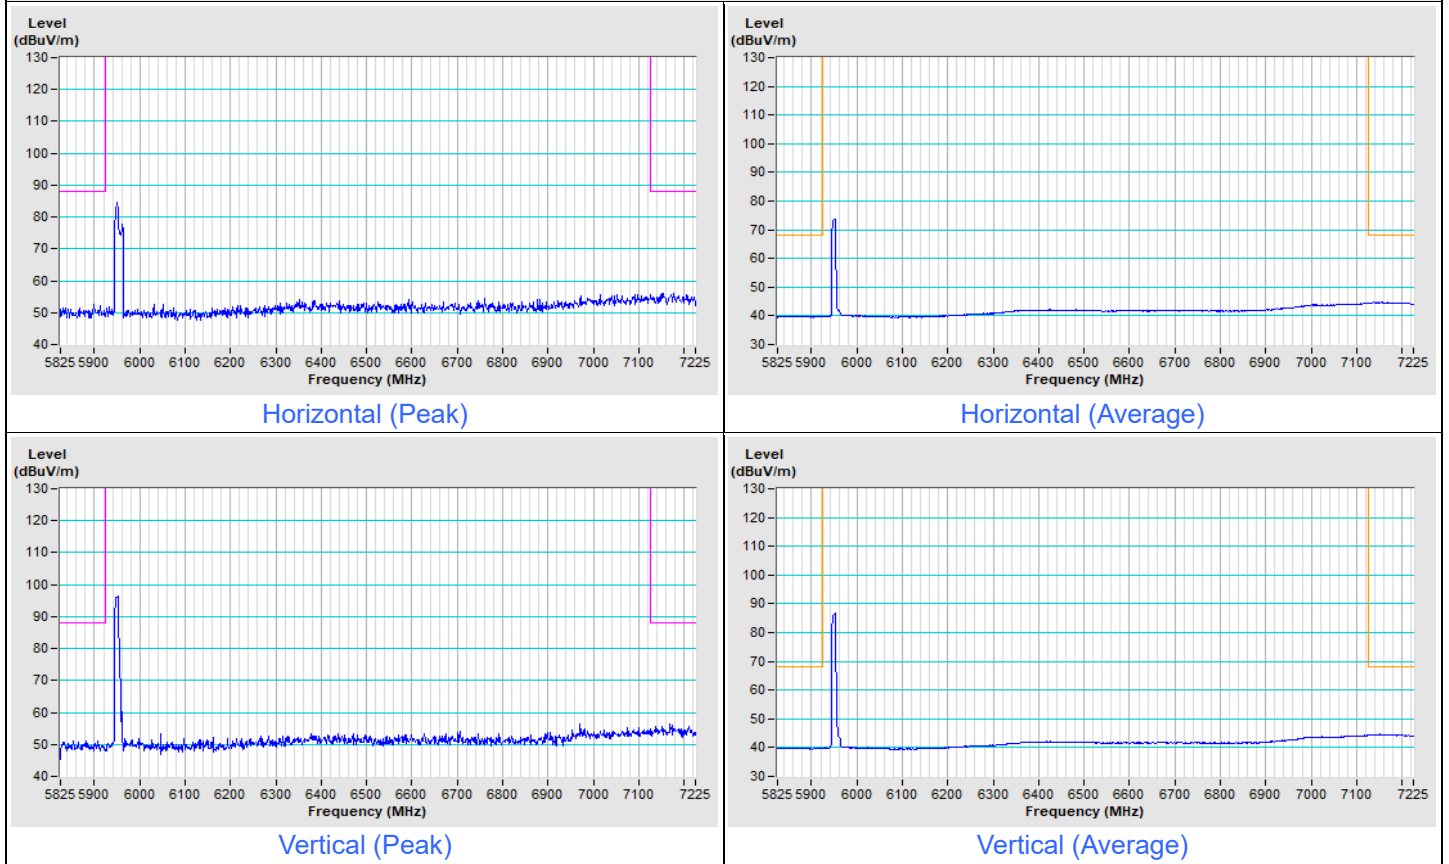


802.11be (EHT20) 106-tone RU Channel 181

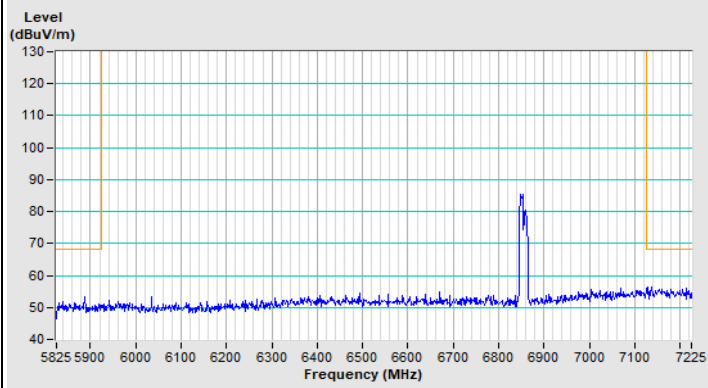


Horizontal (Peak)

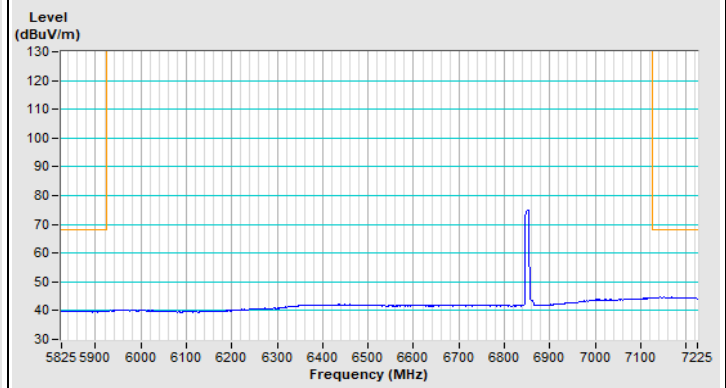

Horizontal (Average)

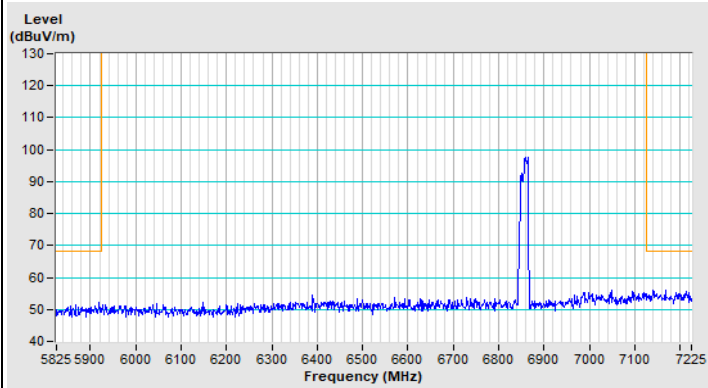


Vertical (Peak)

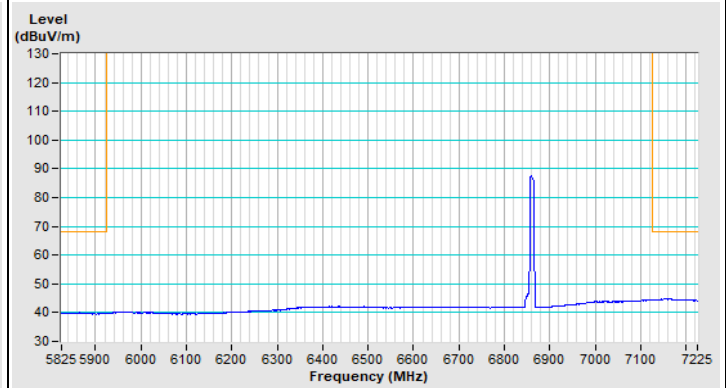


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

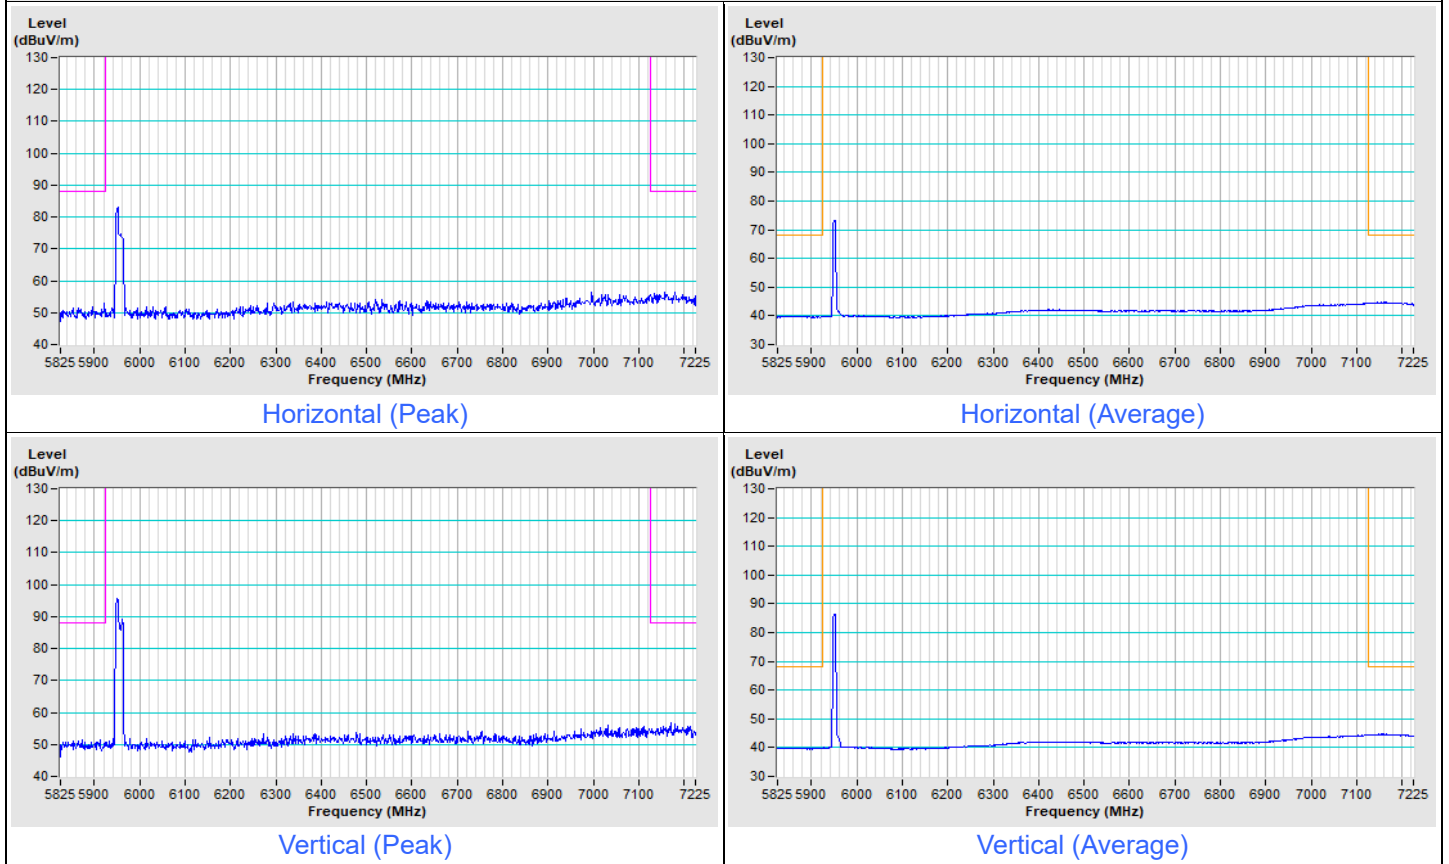


802.11be (EHT20) 52+26-tone MRU Channel 181

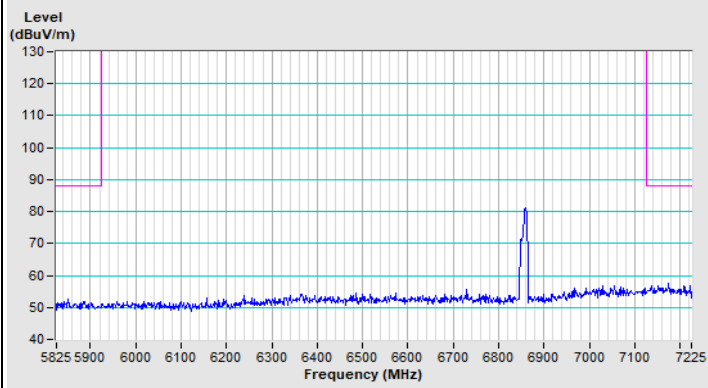


Horizontal (Peak)

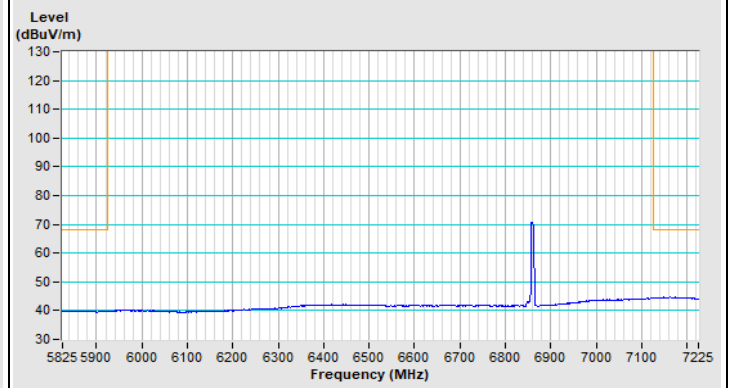

Horizontal (Average)

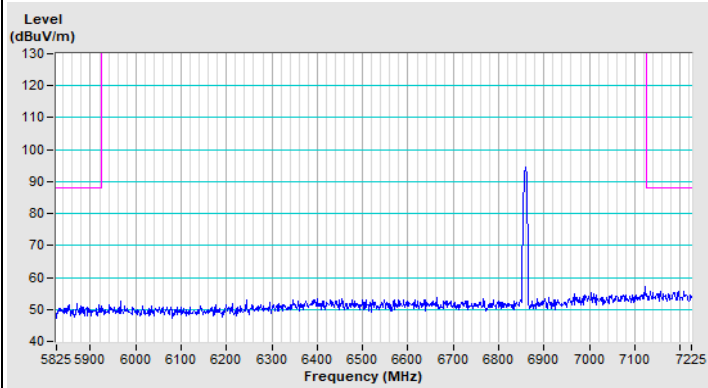


Vertical (Peak)

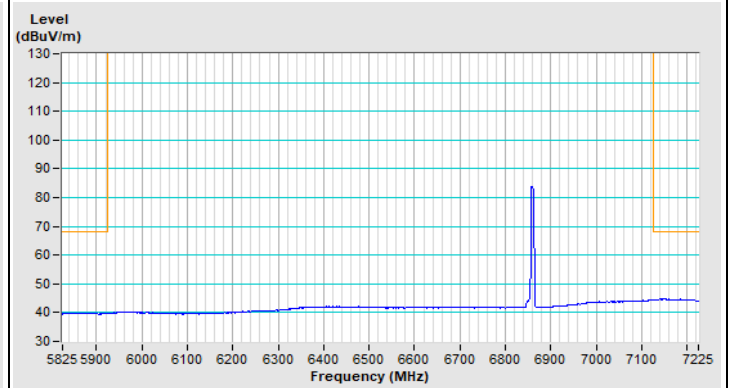


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

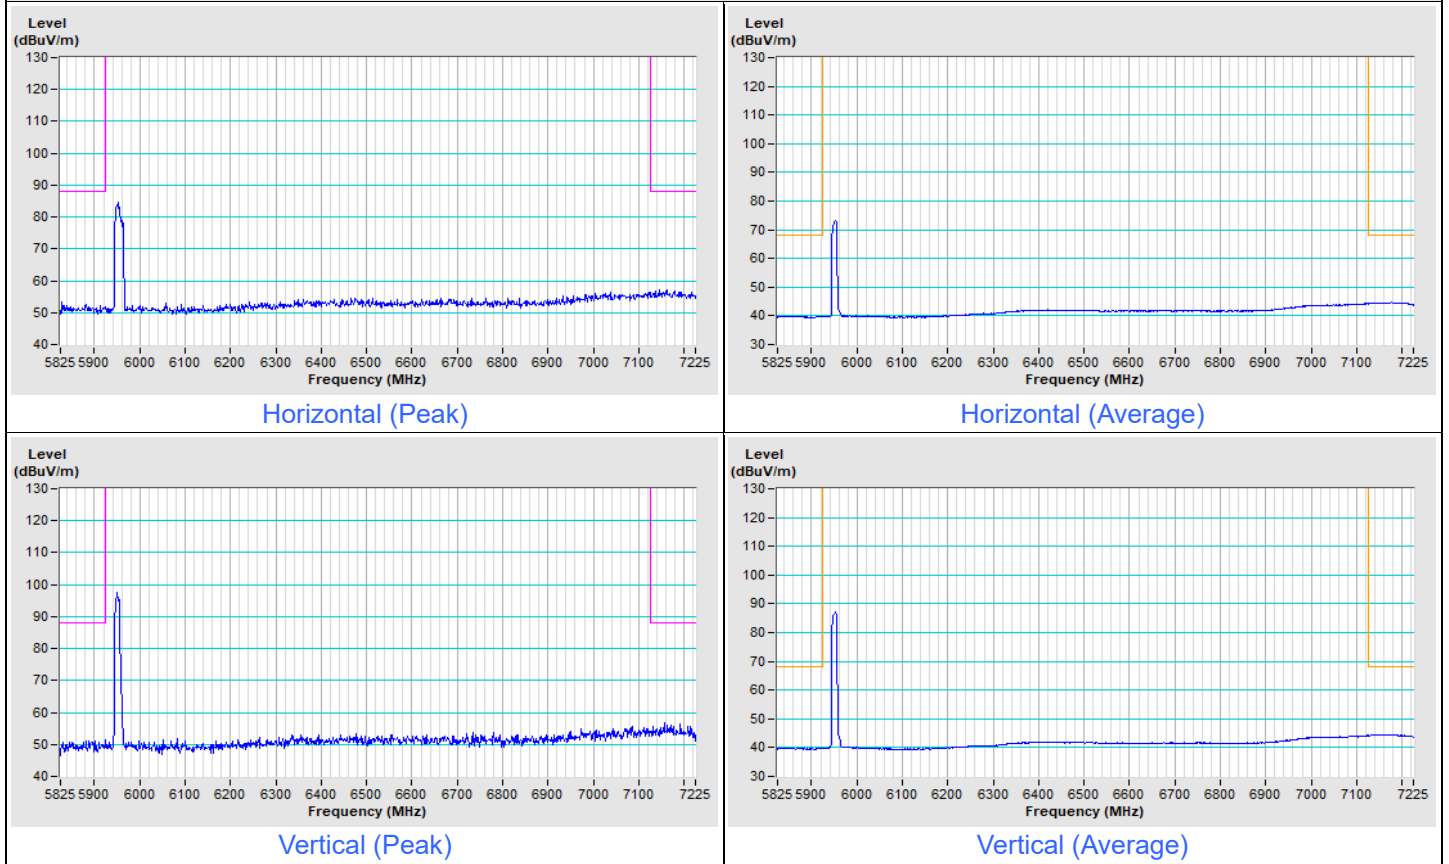


802.11be (EHT20) 106+26-tone MRU Channel 181

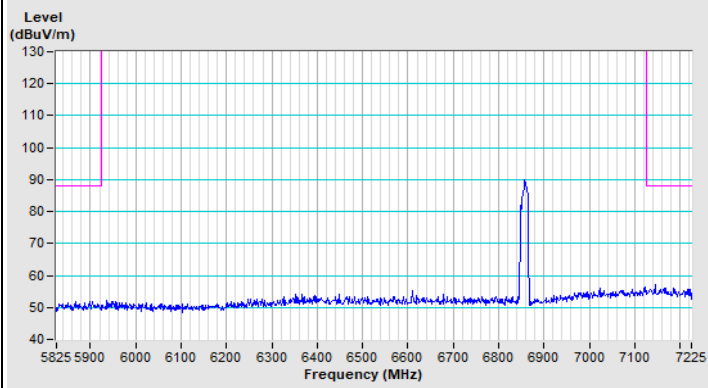


Horizontal (Peak)

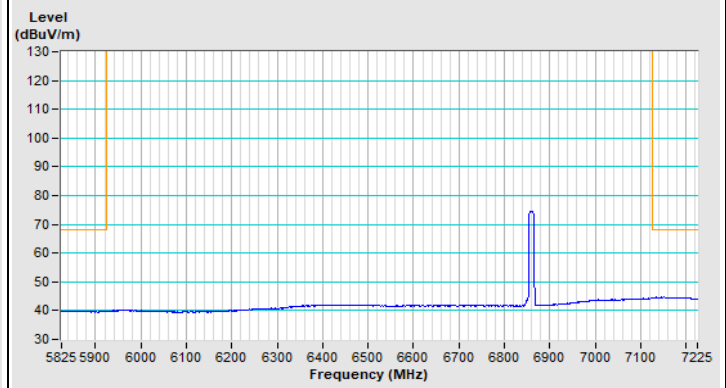

Horizontal (Average)

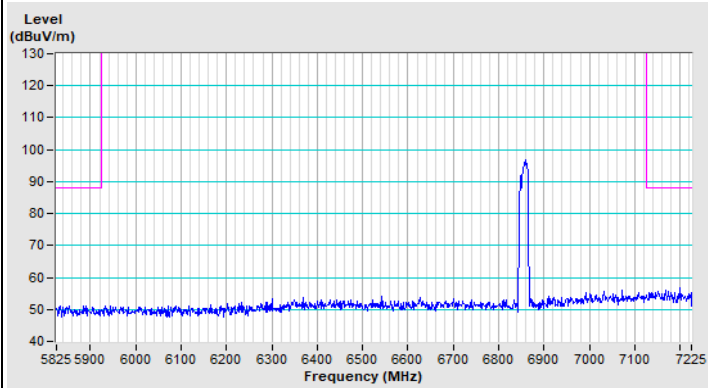


Vertical (Peak)

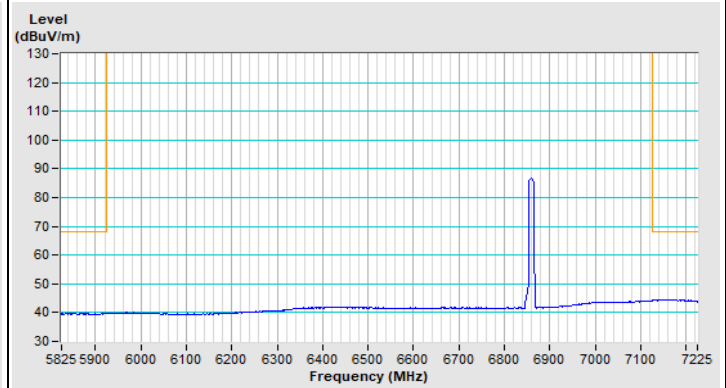


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

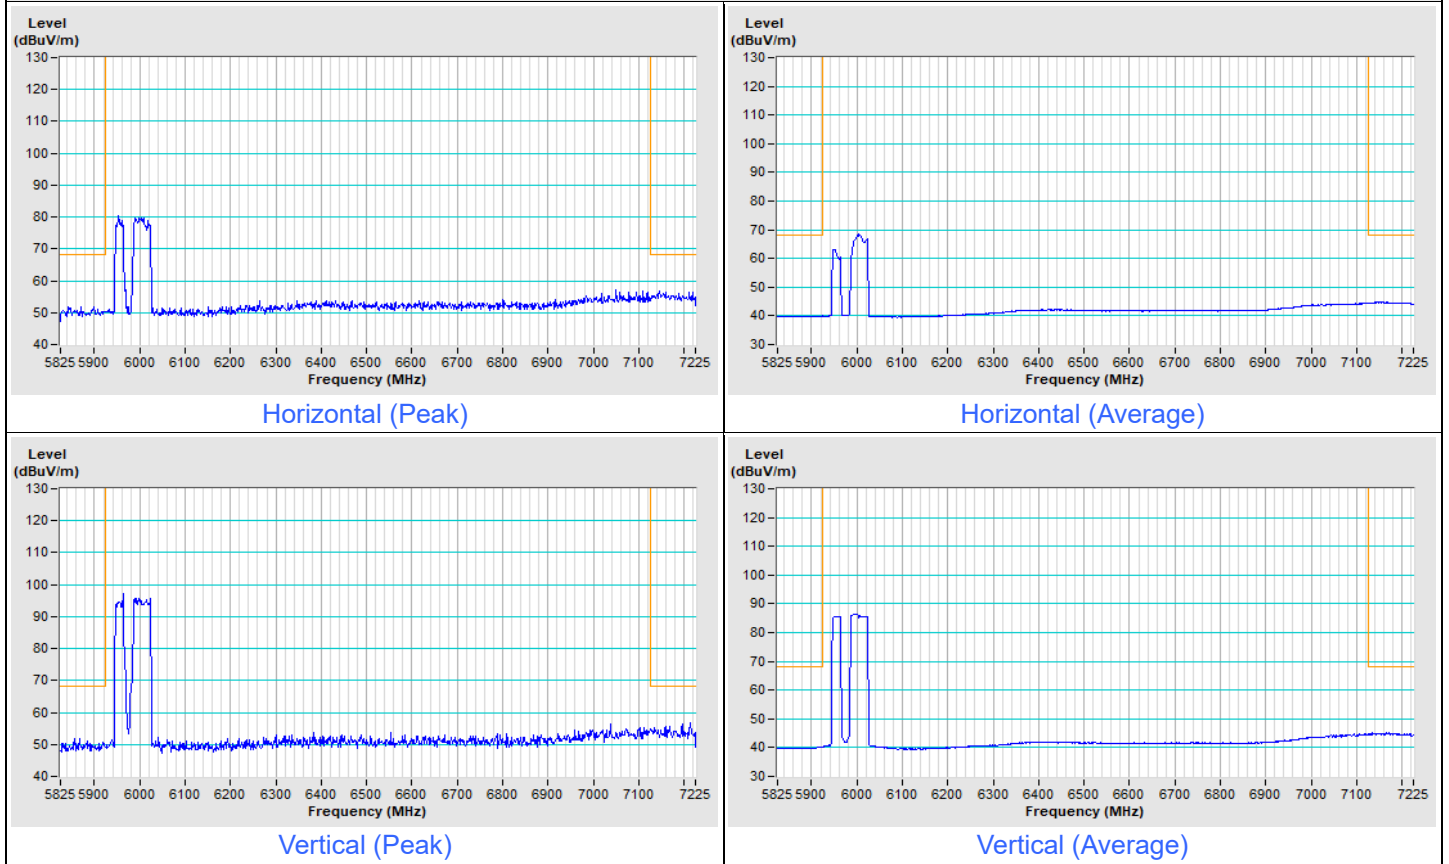


802.11be (EHT80) 484+242-tone MRU Channel 167

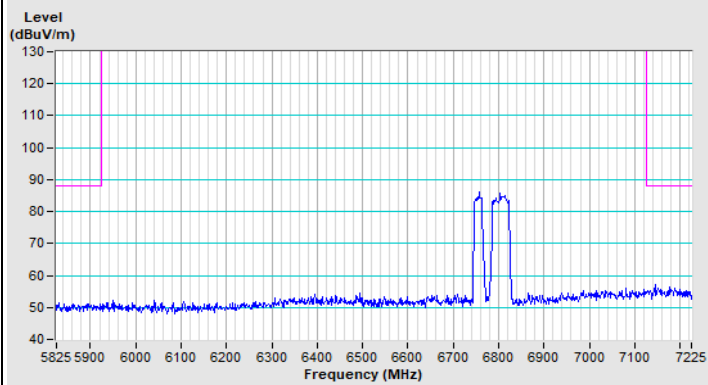


Horizontal (Peak)

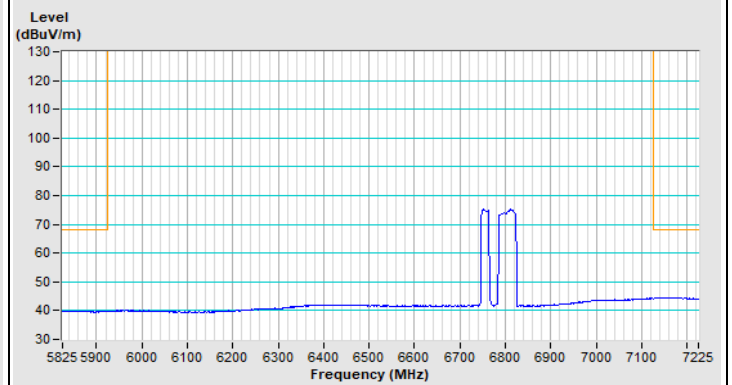

Horizontal (Average)

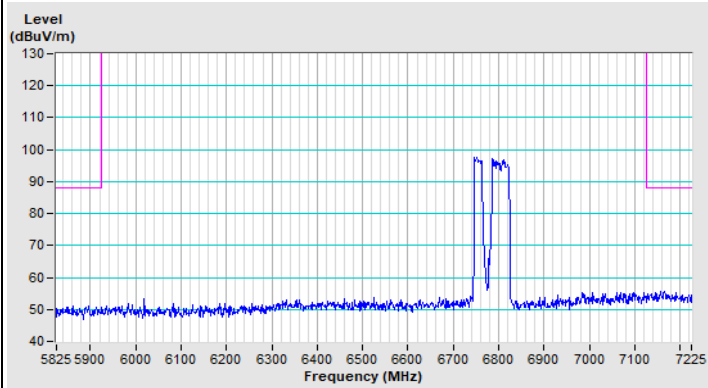


Vertical (Peak)

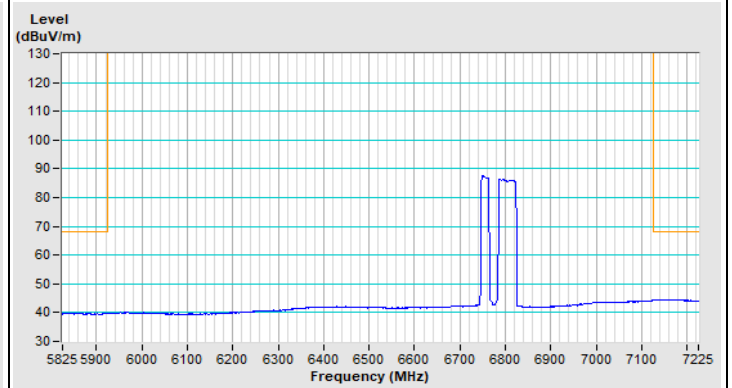


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

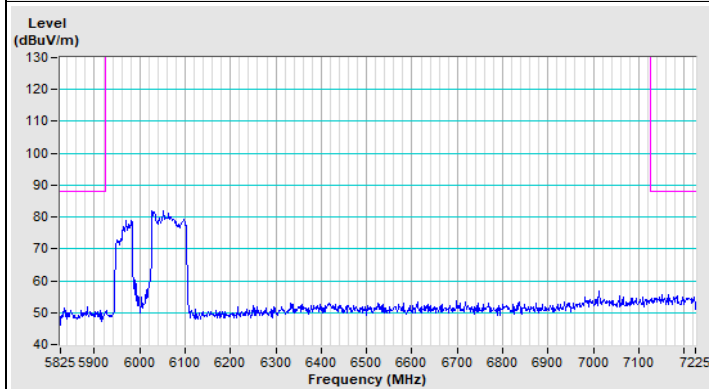


Horizontal (Peak)

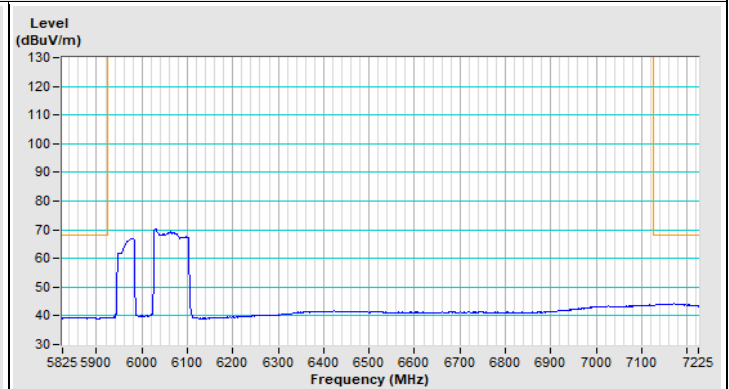

Horizontal (Average)

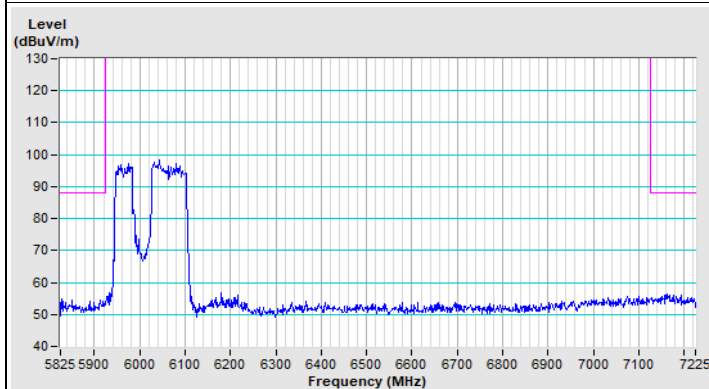


Vertical (Peak)

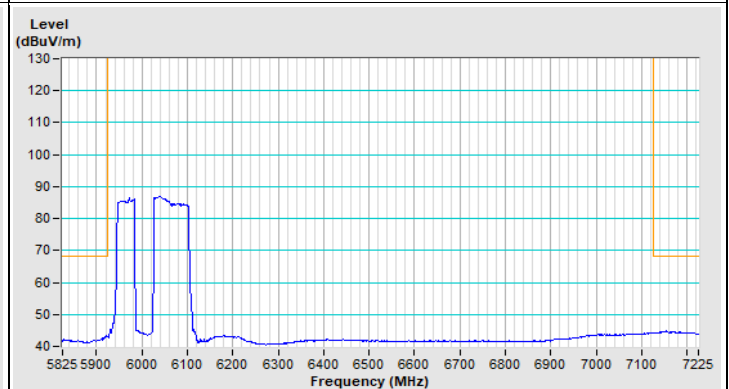


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 143

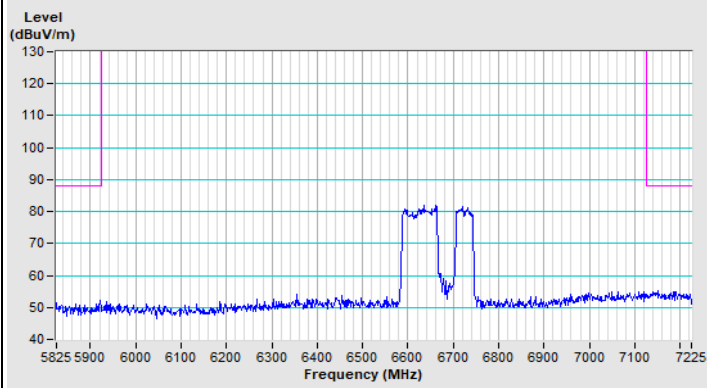


Horizontal (Peak)

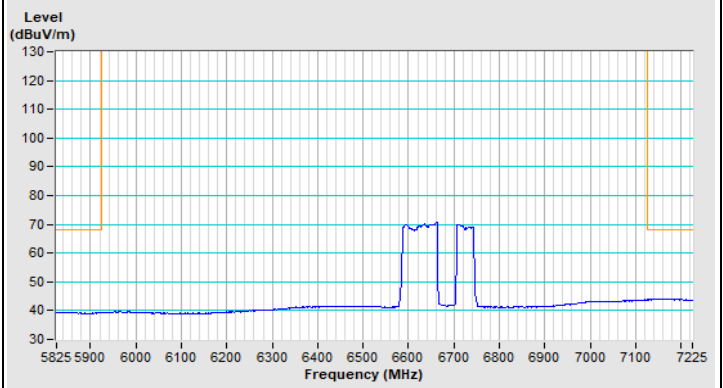

Horizontal (Average)

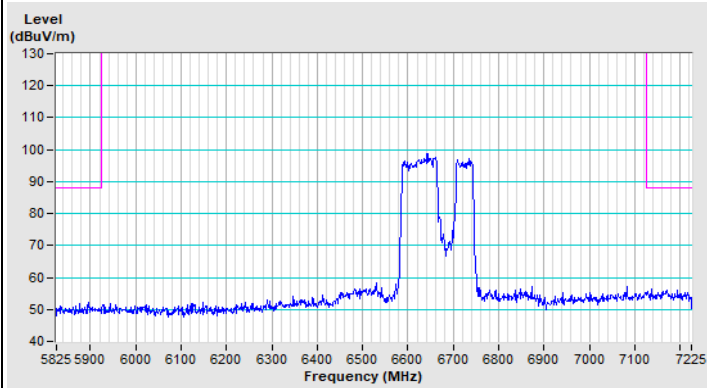


Vertical (Peak)

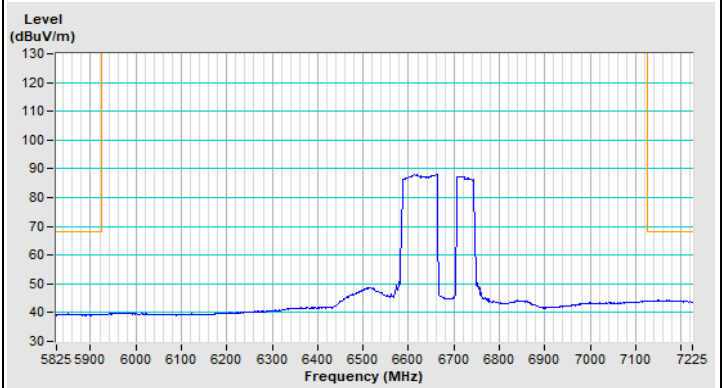


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

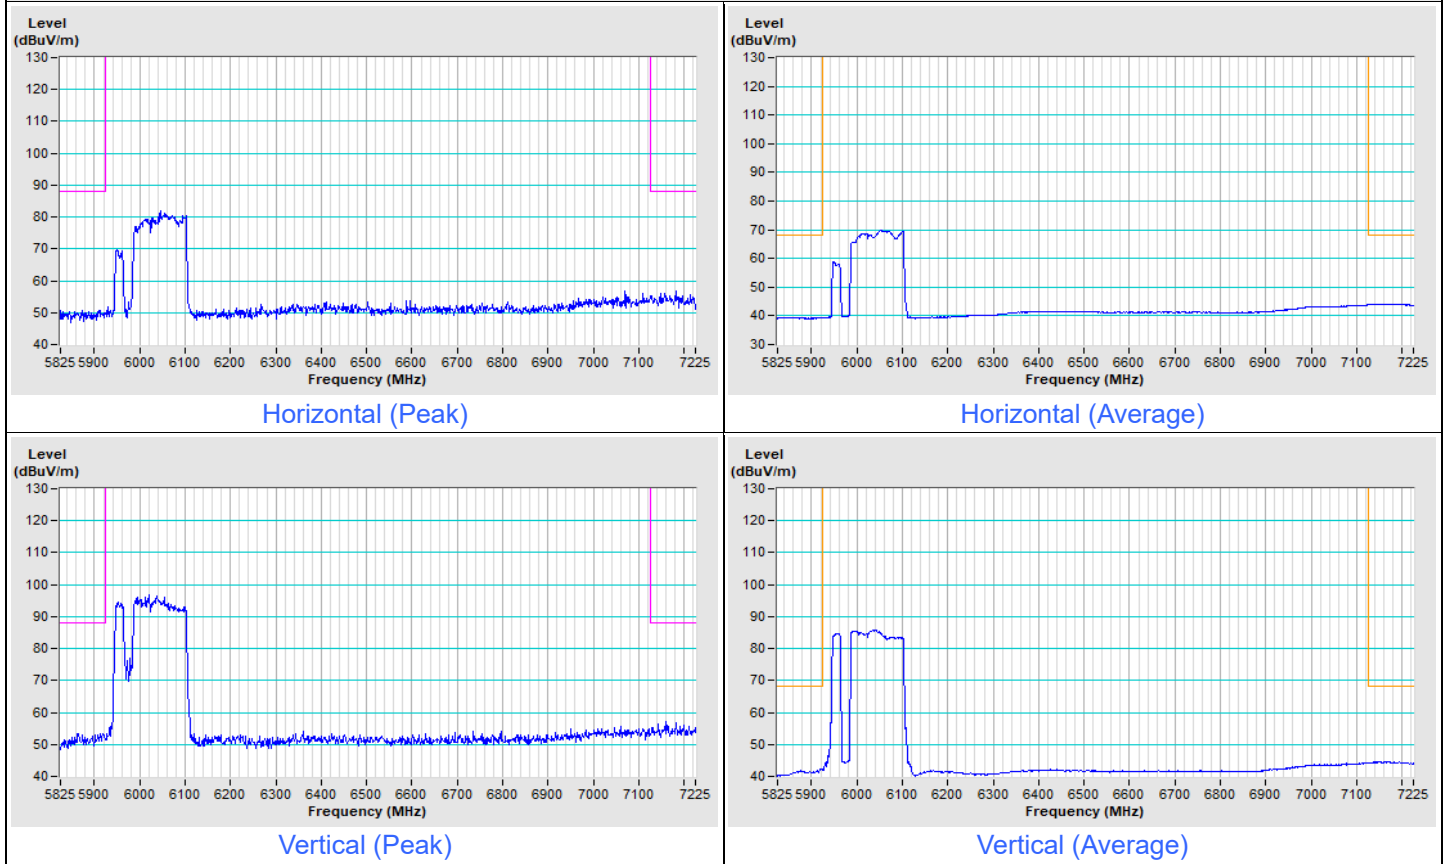


802.11be (EHT160) 996+484+242-tone MRU Channel 143

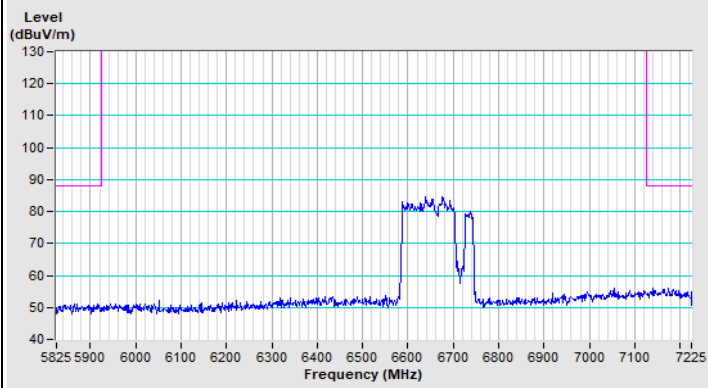


Horizontal (Peak)

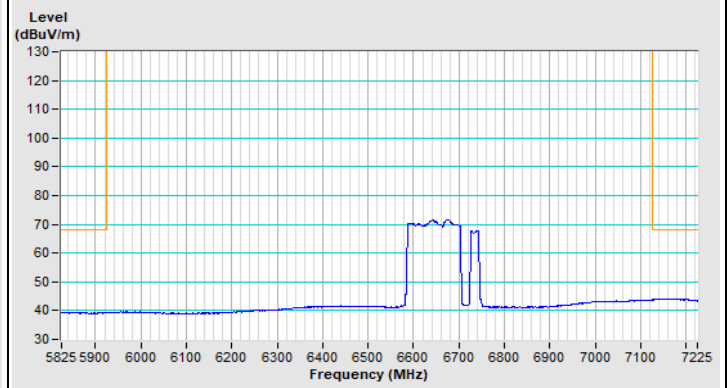

Horizontal (Average)

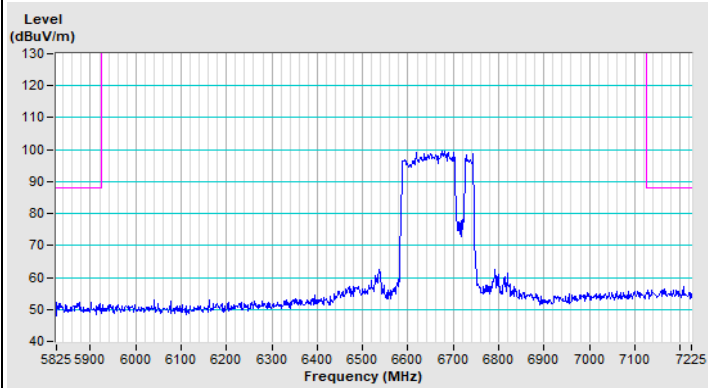

Vertical (Peak)

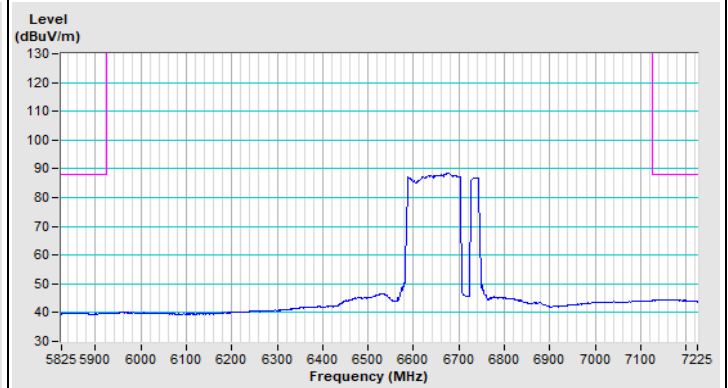

Vertical (Average)


Mode C_2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.2 PK	88.2	-36.0	3.34 H	255	46.6	5.6
2	#5925.00	40.5 AV	68.2	-27.7	3.34 H	255	34.9	5.6
3	*5955.00	96.2 PK			3.34 H	255	90.7	5.5
4	*5955.00	86.8 AV			3.34 H	255	81.3	5.5
5	11910.00	46.8 PK	74.0	-27.2	1.79 H	98	32.2	14.6
6	11910.00	34.6 AV	54.0	-19.4	1.79 H	98	20.0	14.6
7	17865.00	58.4 PK	74.0	-15.6	1.74 H	27	32.5	25.9
8	17865.00	45.2 AV	54.0	-8.8	1.74 H	27	19.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

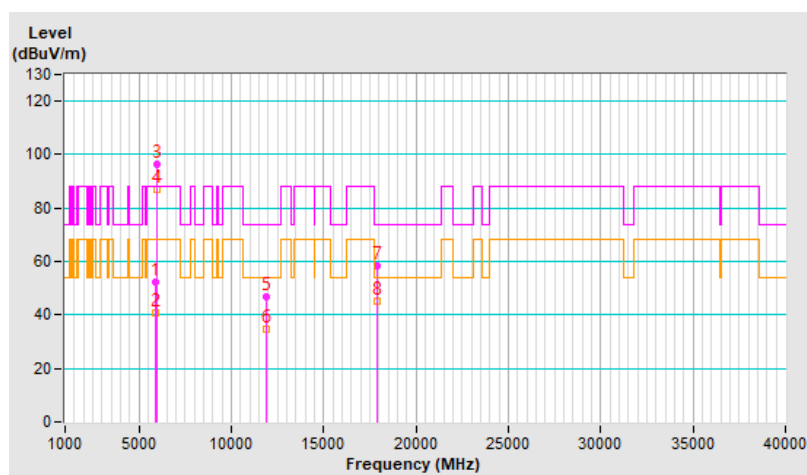


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.7 PK	88.2	-35.5	1.45 V	93	47.1	5.6
2	#5925.00	42.1 AV	68.2	-26.1	1.45 V	93	36.5	5.6
3	*5955.00	108.3 PK			1.45 V	93	102.8	5.5
4	*5955.00	100.0 AV			1.45 V	93	94.5	5.5
5	11910.00	45.6 PK	74.0	-28.4	1.67 V	27	31.0	14.6
6	11910.00	33.8 AV	54.0	-20.2	1.67 V	27	19.2	14.6
7	17865.00	58.1 PK	74.0	-15.9	1.71 V	33	32.2	25.9
8	17865.00	45.6 AV	54.0	-8.4	1.71 V	33	19.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

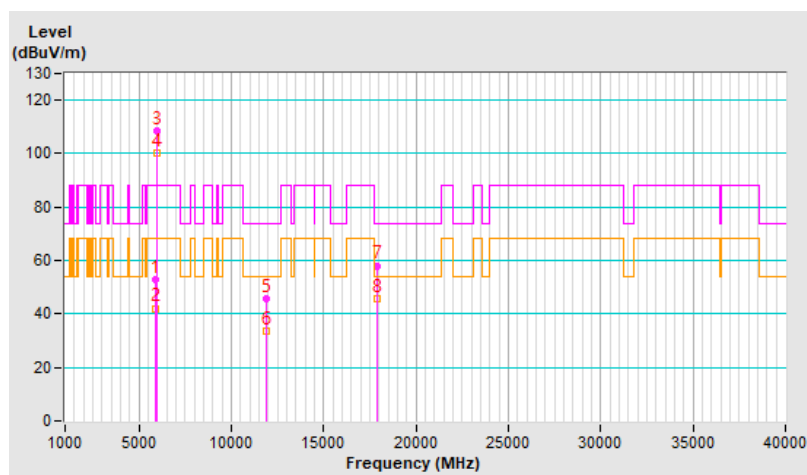


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	94.2 PK			2.69 H	216	88.4	5.8
2	*6195.00	85.2 AV			2.69 H	216	79.4	5.8
3	12390.00	46.4 PK	74.0	-27.6	1.79 H	108	31.7	14.7
4	12390.00	34.7 AV	54.0	-19.3	1.79 H	108	20.0	14.7
5	18585.00	58.6 PK	74.0	-15.4	1.78 H	50	64.1	-5.5
6	18585.00	45.6 AV	54.0	-8.4	1.78 H	50	51.1	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

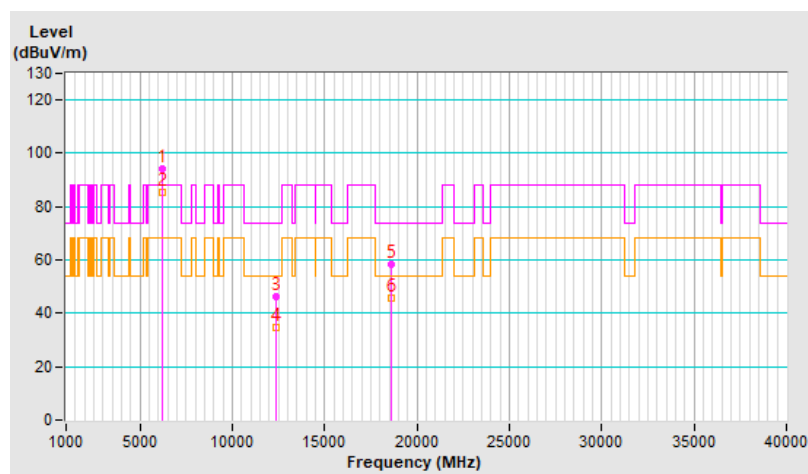


RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.3 PK			1.88 V	90	102.5	5.8
2	*6195.00	99.3 AV			1.88 V	90	93.5	5.8
3	12390.00	45.5 PK	74.0	-28.5	1.67 V	13	30.8	14.7
4	12390.00	33.6 AV	54.0	-20.4	1.67 V	13	18.9	14.7
5	18585.00	58.0 PK	74.0	-16.0	1.67 V	19	63.5	-5.5
6	18585.00	45.2 AV	54.0	-8.8	1.67 V	19	50.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

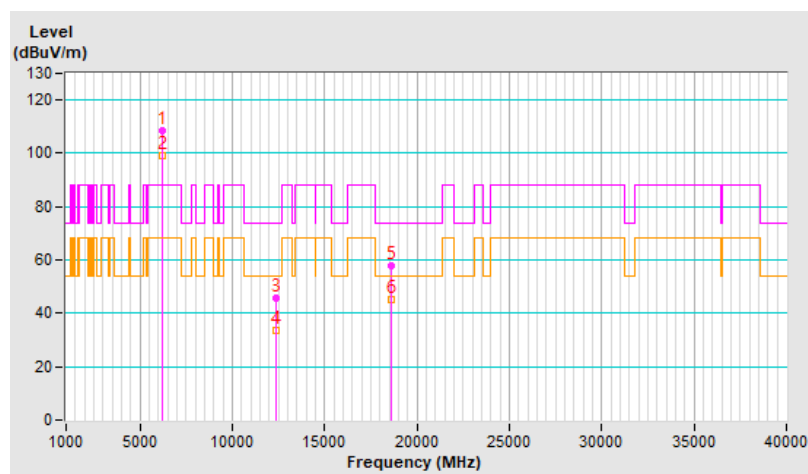


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.3 PK			2.75 H	228	89.5	6.8
2	*6415.00	86.7 AV			2.75 H	228	79.9	6.8
3	#12830.00	47.0 PK	88.2	-41.2	1.80 H	95	31.9	15.1
4	#12830.00	34.8 AV	68.2	-33.4	1.80 H	95	19.7	15.1
5	19245.00	58.0 PK	74.0	-16.0	1.76 H	32	62.6	-4.6
6	19245.00	45.2 AV	54.0	-8.8	1.76 H	32	49.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

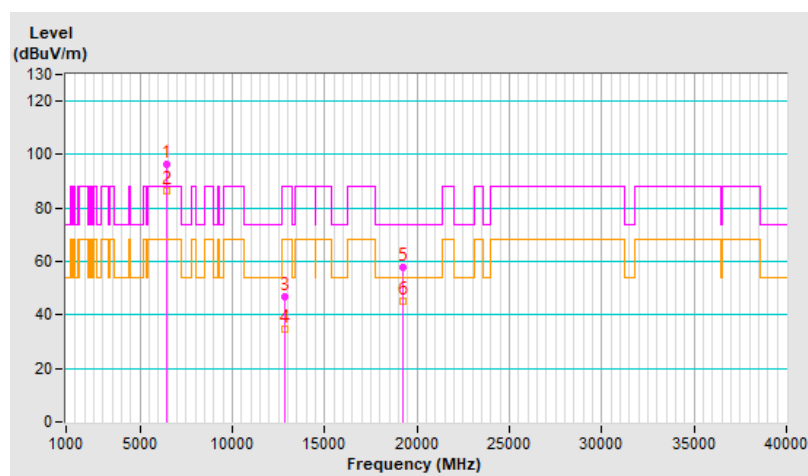


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.3 PK			1.76 V	97	101.5	6.8
2	*6415.00	99.1 AV			1.76 V	97	92.3	6.8
3	#12830.00	45.4 PK	88.2	-42.8	1.67 V	21	30.3	15.1
4	#12830.00	33.8 AV	68.2	-34.4	1.67 V	21	18.7	15.1
5	19245.00	57.8 PK	74.0	-16.2	1.78 V	39	62.4	-4.6
6	19245.00	45.2 AV	54.0	-8.8	1.78 V	39	49.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

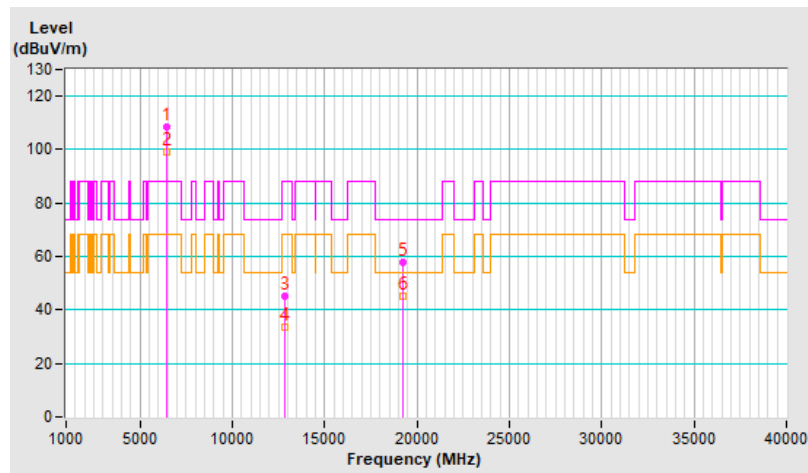


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.7 PK			2.52 H	223	89.3	7.4
2	*6535.00	87.9 AV			2.52 H	223	80.5	7.4
3	#13070.00	46.8 PK	88.2	-41.4	1.80 H	86	31.7	15.1
4	#13070.00	35.1 AV	68.2	-33.1	1.80 H	86	20.0	15.1
5	19605.00	57.9 PK	74.0	-16.1	1.78 H	51	62.7	-4.8
6	19605.00	44.9 AV	54.0	-9.1	1.78 H	51	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

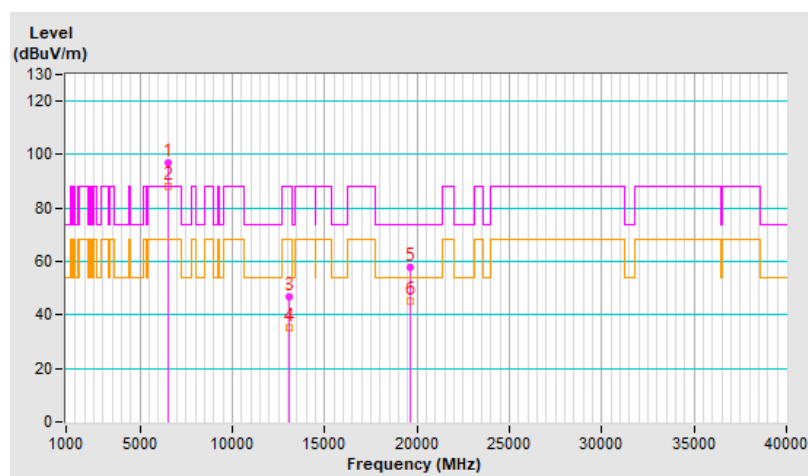


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.8 PK			1.79 V	99	100.4	7.4
2	*6535.00	99.1 AV			1.79 V	99	91.7	7.4
3	#13070.00	46.0 PK	88.2	-42.2	1.72 V	15	30.9	15.1
4	#13070.00	34.1 AV	68.2	-34.1	1.72 V	15	19.0	15.1
5	19605.00	58.3 PK	74.0	-15.7	1.74 V	40	63.1	-4.8
6	19605.00	45.6 AV	54.0	-8.4	1.74 V	40	50.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

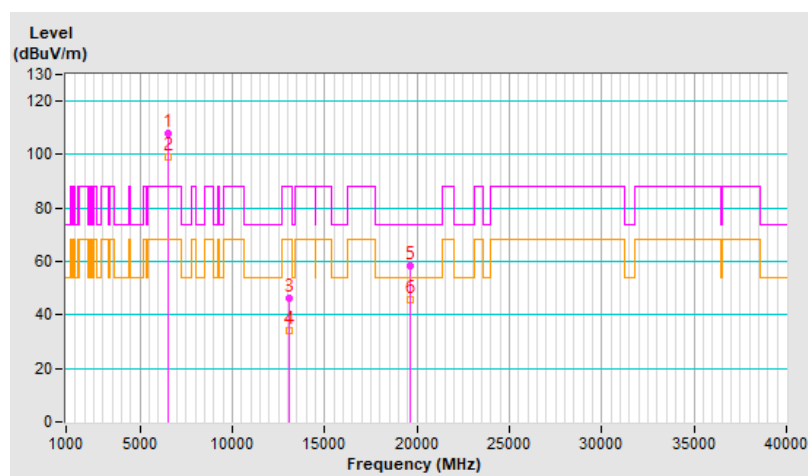


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	93.1 PK			1.44 H	208	85.4	7.7
2	*6695.00	83.8 AV			1.44 H	208	76.1	7.7
3	13390.00	46.4 PK	74.0	-27.6	1.75 H	81	31.0	15.4
4	13390.00	34.7 AV	54.0	-19.3	1.75 H	81	19.3	15.4
5	20085.00	58.1 PK	74.0	-15.9	1.69 H	53	62.4	-4.3
6	20085.00	45.1 AV	54.0	-8.9	1.69 H	53	49.4	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

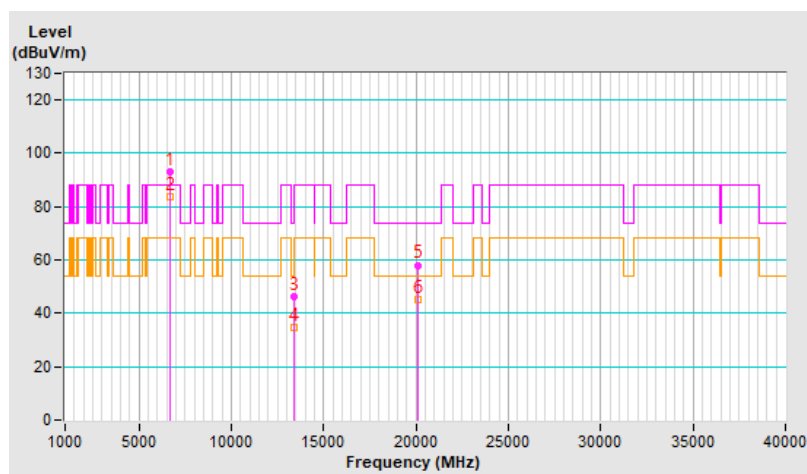


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.8 PK			1.84 V	92	101.1	7.7
2	*6695.00	99.4 AV			1.84 V	92	91.7	7.7
3	13390.00	46.0 PK	74.0	-28.0	1.69 V	9	30.6	15.4
4	13390.00	34.3 AV	54.0	-19.7	1.69 V	9	18.9	15.4
5	20085.00	57.9 PK	74.0	-16.1	1.70 V	54	62.2	-4.3
6	20085.00	45.2 AV	54.0	-8.8	1.70 V	54	49.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

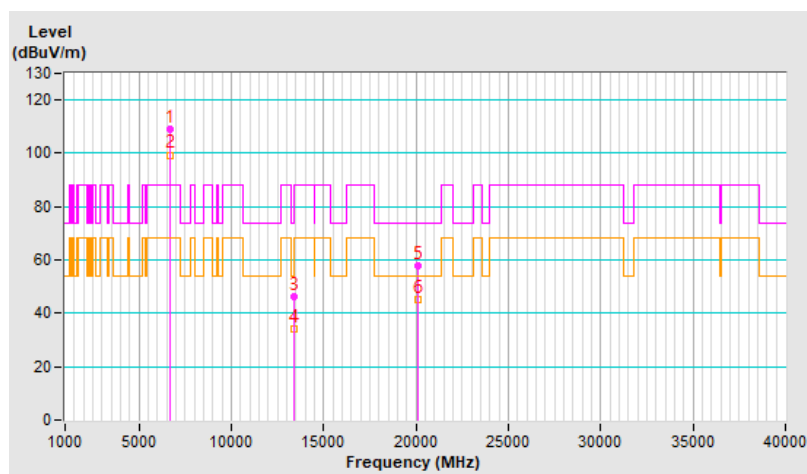


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	96.5 PK			1.25 H	225	88.3	8.2
2	*6855.00	88.3 AV			1.25 H	225	80.1	8.2
3	#13710.00	46.2 PK	88.2	-42.0	1.78 H	106	29.9	16.3
4	#13710.00	34.4 AV	68.2	-33.8	1.78 H	106	18.1	16.3
5	20565.00	58.0 PK	74.0	-16.0	1.75 H	47	61.7	-3.7
6	20565.00	45.0 AV	54.0	-9.0	1.75 H	47	48.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

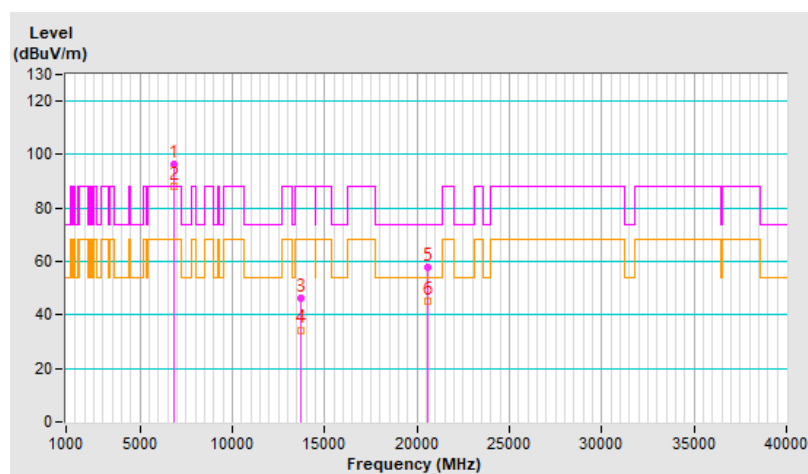


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.2 PK			1.75 V	91	100.0	8.2
2	*6855.00	99.5 AV			1.75 V	91	91.3	8.2
3	#13710.00	45.7 PK	88.2	-42.5	1.66 V	3	29.4	16.3
4	#13710.00	33.8 AV	68.2	-34.4	1.66 V	3	17.5	16.3
5	20565.00	58.3 PK	74.0	-15.7	1.68 V	50	62.0	-3.7
6	20565.00	45.3 AV	54.0	-8.7	1.68 V	50	49.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

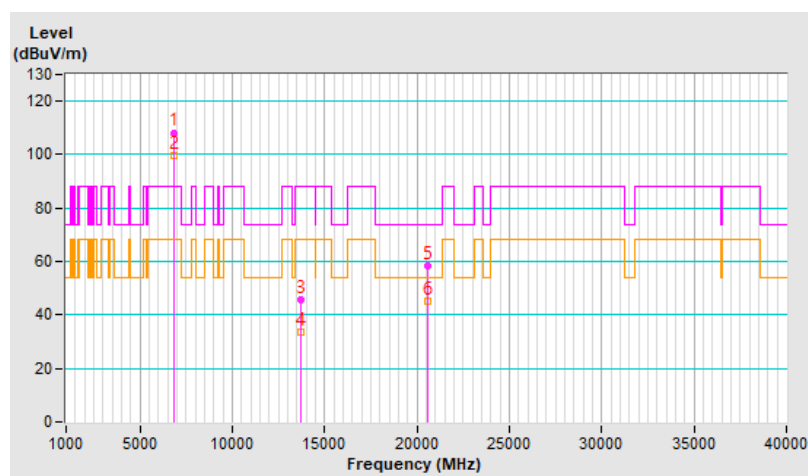


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.14 H	259	45.5	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.14 H	259	34.0	5.6
3	*5955.00	84.1 PK			1.14 H	259	78.6	5.5
4	*5955.00	73.9 AV			1.14 H	259	68.4	5.5
5	11910.00	46.5 PK	74.0	-27.5	1.81 H	94	31.9	14.6
6	11910.00	34.6 AV	54.0	-19.4	1.81 H	94	20.0	14.6
7	17865.00	58.3 PK	74.0	-15.7	1.74 H	43	32.4	25.9
8	17865.00	45.3 AV	54.0	-8.7	1.74 H	43	19.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

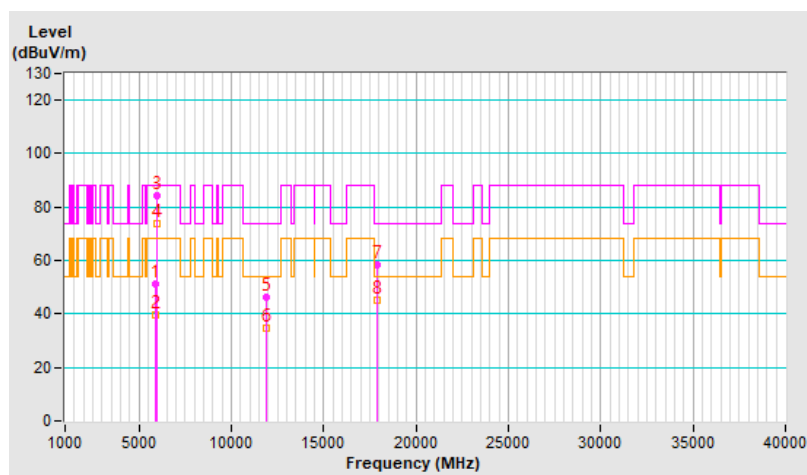


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.44 V	81	45.7	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.44 V	81	33.9	5.6
3	*5955.00	96.1 PK			1.44 V	81	90.6	5.5
4	*5955.00	85.6 AV			1.44 V	81	80.1	5.5
5	11910.00	45.3 PK	74.0	-28.7	1.67 V	98	30.7	14.6
6	11910.00	33.3 AV	54.0	-20.7	1.67 V	98	18.7	14.6
7	17865.00	58.7 PK	74.0	-15.3	1.68 V	28	32.8	25.9
8	17865.00	46.2 AV	54.0	-7.8	1.68 V	28	20.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

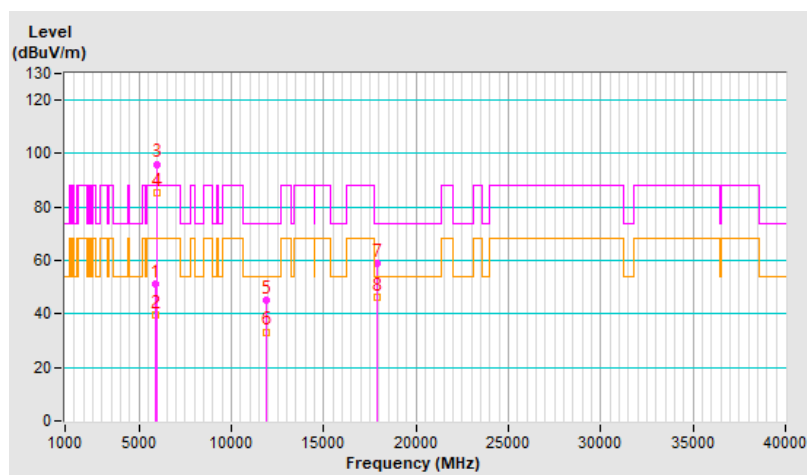


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	83.7 PK			3.13 H	140	77.9	5.8
2	*6195.00	73.5 AV			3.13 H	140	67.7	5.8
3	12390.00	46.5 PK	74.0	-27.5	1.83 H	115	31.8	14.7
4	12390.00	34.2 AV	54.0	-19.8	1.83 H	115	19.5	14.7
5	18585.00	58.1 PK	74.0	-15.9	1.77 H	32	63.6	-5.5
6	18585.00	45.1 AV	54.0	-8.9	1.77 H	32	50.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

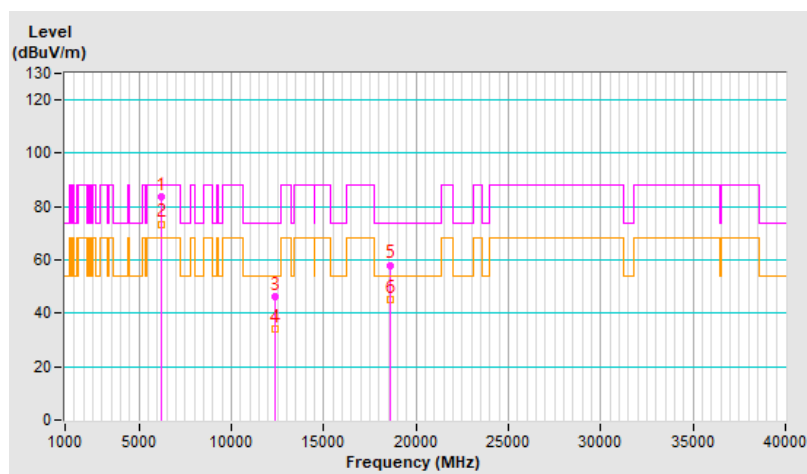


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	95.9 PK			1.50 V	94	90.1	5.8
2	*6195.00	85.6 AV			1.50 V	94	79.8	5.8
3	12390.00	45.6 PK	74.0	-28.4	1.64 V	106	30.9	14.7
4	12390.00	33.6 AV	54.0	-20.4	1.64 V	106	18.9	14.7
5	18585.00	59.2 PK	74.0	-14.8	1.62 V	33	64.7	-5.5
6	18585.00	46.5 AV	54.0	-7.5	1.62 V	33	52.0	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

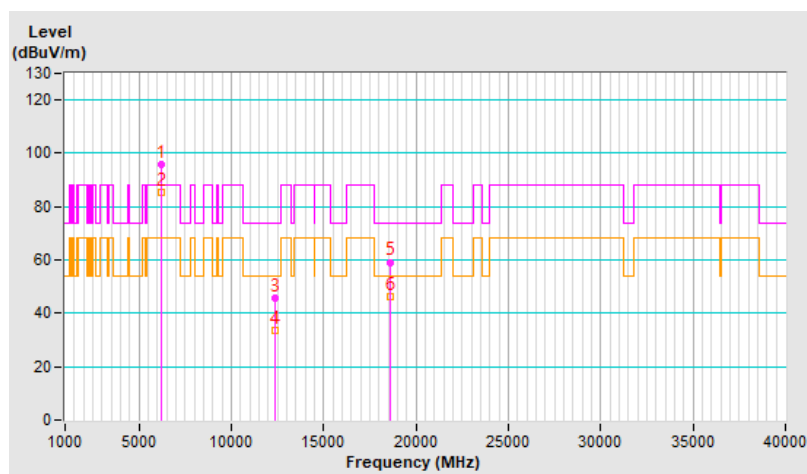


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	84.3 PK			3.09 H	117	77.5	6.8
2	*6415.00	74.0 AV			3.09 H	117	67.2	6.8
3	#12830.00	45.7 PK	88.2	-42.5	1.80 H	118	30.6	15.1
4	#12830.00	33.8 AV	68.2	-34.4	1.80 H	118	18.7	15.1
5	19245.00	58.7 PK	74.0	-15.3	1.73 H	36	63.3	-4.6
6	19245.00	45.7 AV	54.0	-8.3	1.73 H	36	50.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

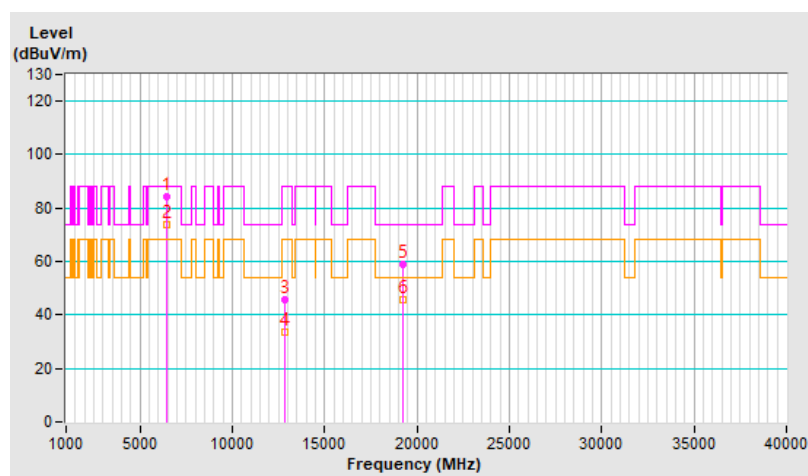


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.1 PK			1.48 V	69	89.3	6.8
2	*6415.00	85.9 AV			1.48 V	69	79.1	6.8
3	#12830.00	44.9 PK	88.2	-43.3	1.63 V	109	29.8	15.1
4	#12830.00	33.1 AV	68.2	-35.1	1.63 V	109	18.0	15.1
5	19245.00	59.2 PK	74.0	-14.8	1.65 V	19	63.8	-4.6
6	19245.00	46.7 AV	54.0	-7.3	1.65 V	19	51.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

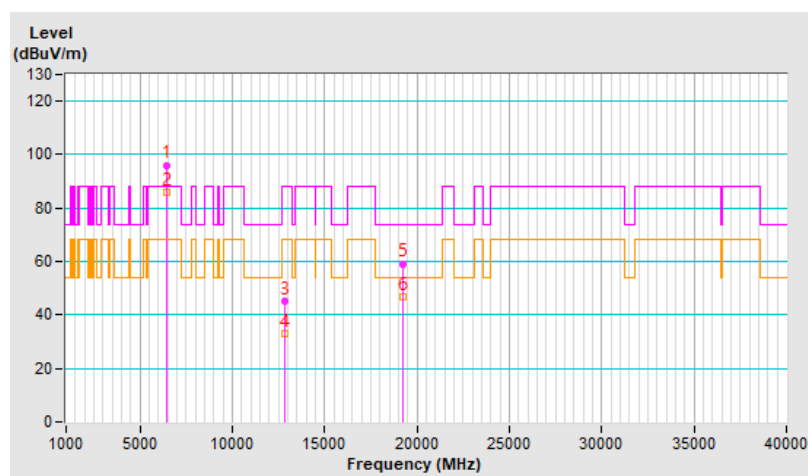


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	84.0 PK			3.10 H	141	76.6	7.4
2	*6535.00	73.9 AV			3.10 H	141	66.5	7.4
3	#13070.00	46.0 PK	88.2	-42.2	1.85 H	107	30.9	15.1
4	#13070.00	34.0 AV	68.2	-34.2	1.85 H	107	18.9	15.1
5	19605.00	58.2 PK	74.0	-15.8	1.83 H	24	63.0	-4.8
6	19605.00	45.0 AV	54.0	-9.0	1.83 H	24	49.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

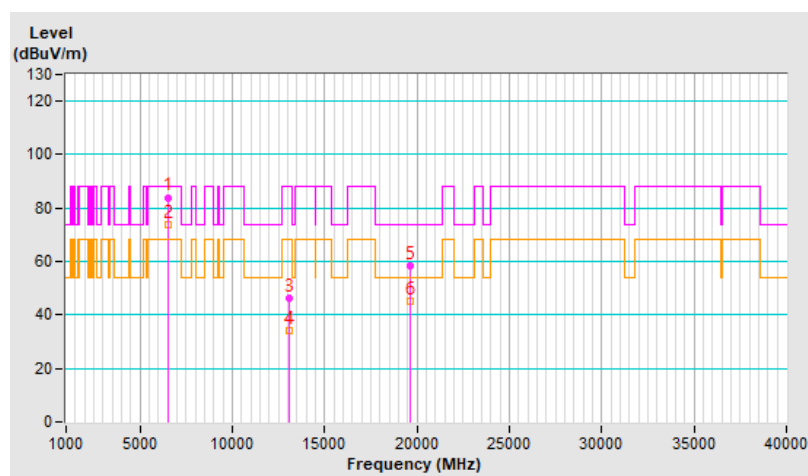


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.2 PK			1.48 V	88	88.8	7.4
2	*6535.00	85.9 AV			1.48 V	88	78.5	7.4
3	#13070.00	46.0 PK	88.2	-42.2	1.72 V	110	30.9	15.1
4	#13070.00	33.7 AV	68.2	-34.5	1.72 V	110	18.6	15.1
5	19605.00	58.4 PK	74.0	-15.6	1.72 V	37	63.2	-4.8
6	19605.00	46.2 AV	54.0	-7.8	1.72 V	37	51.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

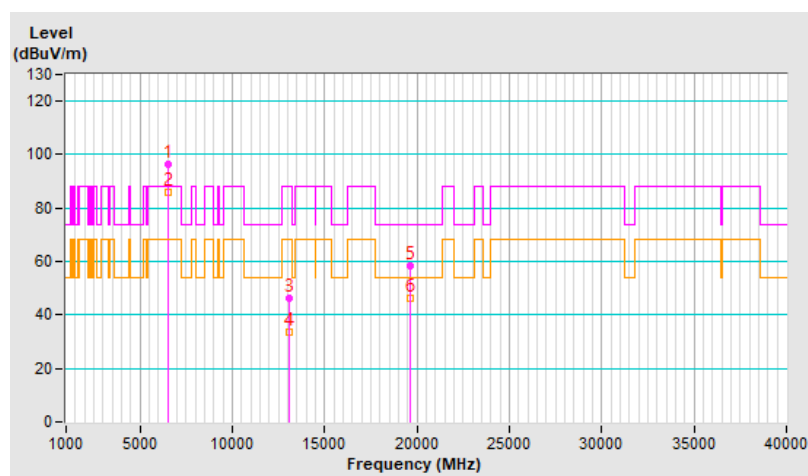


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	84.1 PK			3.11 H	134	76.4	7.7
2	*6695.00	73.8 AV			3.11 H	134	66.1	7.7
3	13390.00	46.7 PK	74.0	-27.3	1.80 H	94	31.3	15.4
4	13390.00	34.5 AV	54.0	-19.5	1.80 H	94	19.1	15.4
5	20085.00	58.1 PK	74.0	-15.9	1.79 H	19	62.4	-4.3
6	20085.00	45.4 AV	54.0	-8.6	1.79 H	19	49.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

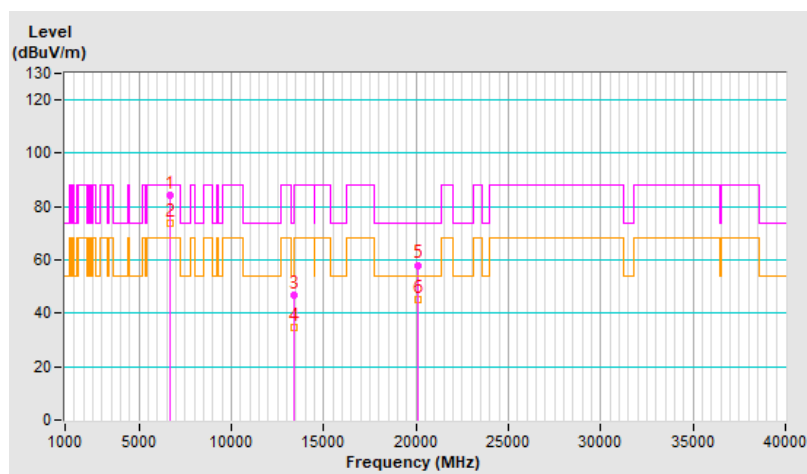


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.3 PK			1.45 V	68	88.6	7.7
2	*6695.00	85.6 AV			1.45 V	68	77.9	7.7
3	13390.00	45.7 PK	74.0	-28.3	1.67 V	98	30.3	15.4
4	13390.00	33.4 AV	54.0	-20.6	1.67 V	98	18.0	15.4
5	20085.00	59.1 PK	74.0	-14.9	1.68 V	16	63.4	-4.3
6	20085.00	46.4 AV	54.0	-7.6	1.68 V	16	50.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

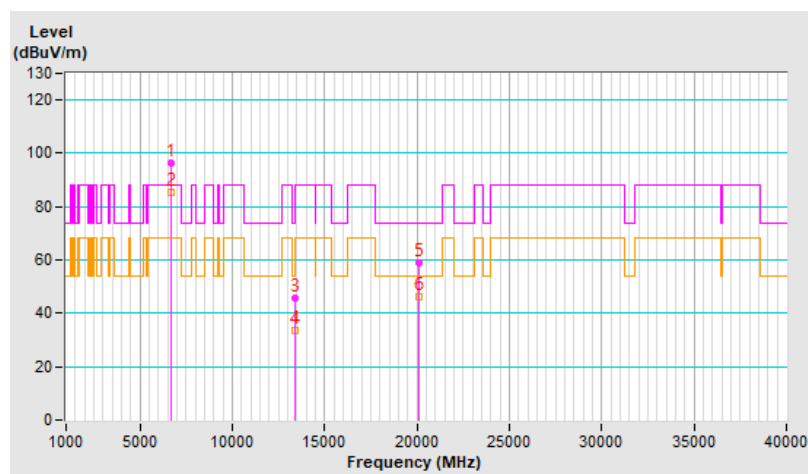


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	83.9 PK			3.10 H	130	75.7	8.2
2	*6855.00	73.9 AV			3.10 H	130	65.7	8.2
3	#13710.00	46.7 PK	88.2	-41.5	1.79 H	102	30.4	16.3
4	#13710.00	34.2 AV	68.2	-34.0	1.79 H	102	17.9	16.3
5	20565.00	57.5 PK	74.0	-16.5	1.73 H	15	61.2	-3.7
6	20565.00	44.9 AV	54.0	-9.1	1.73 H	15	48.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

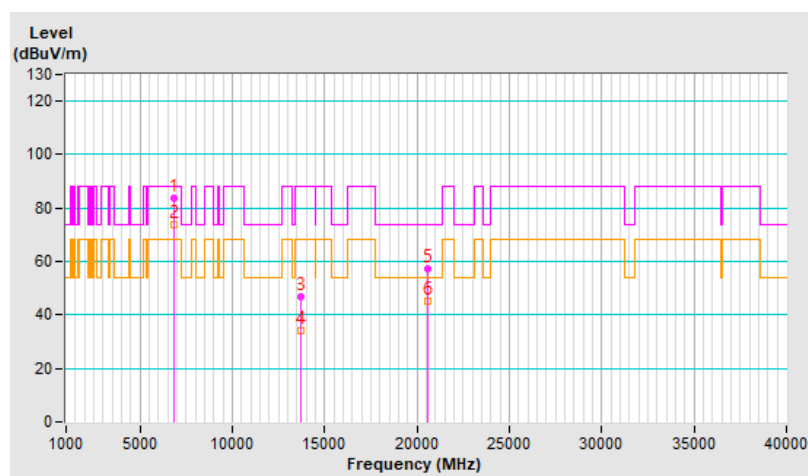


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	96.3 PK			1.61 V	83	88.1	8.2
2	*6855.00	86.0 AV			1.61 V	83	77.8	8.2
3	#13710.00	45.1 PK	88.2	-43.1	1.68 V	103	28.8	16.3
4	#13710.00	32.8 AV	68.2	-35.4	1.68 V	103	16.5	16.3
5	20565.00	58.7 PK	74.0	-15.3	1.67 V	34	62.4	-3.7
6	20565.00	46.5 AV	54.0	-7.5	1.67 V	34	50.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

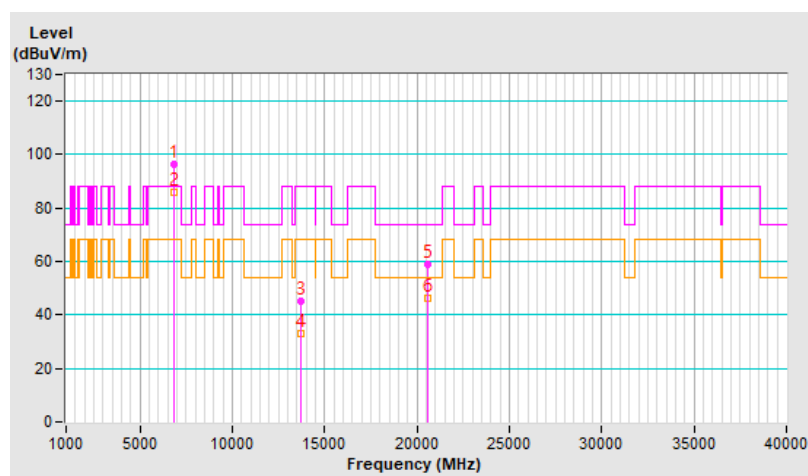


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	1.15 H	263	46.2	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.15 H	263	34.1	5.6
3	*5965.00	85.1 PK			1.15 H	263	79.6	5.5
4	*5965.00	73.9 AV			1.15 H	263	68.4	5.5
5	11930.00	47.0 PK	74.0	-27.0	1.82 H	102	32.5	14.5
6	11930.00	34.6 AV	54.0	-19.4	1.82 H	102	20.1	14.5
7	17895.00	58.5 PK	74.0	-15.5	1.75 H	39	32.1	26.4
8	17895.00	45.5 AV	54.0	-8.5	1.75 H	39	19.1	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

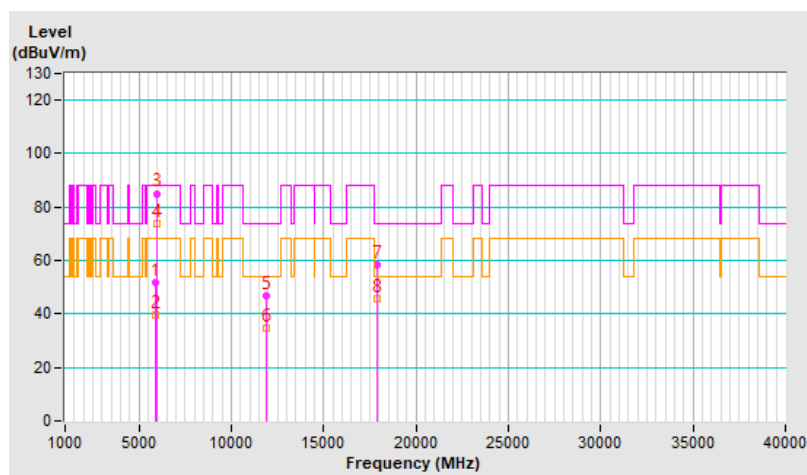


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.80 V	88	46.0	5.6
2	#5925.00	39.9 AV	68.2	-28.3	1.80 V	88	34.3	5.6
3	*5965.00	97.8 PK			1.80 V	88	92.3	5.5
4	*5965.00	86.7 AV			1.80 V	88	81.2	5.5
5	11930.00	44.8 PK	74.0	-29.2	1.69 V	86	30.3	14.5
6	11930.00	32.8 AV	54.0	-21.2	1.69 V	86	18.3	14.5
7	17895.00	58.8 PK	74.0	-15.2	1.70 V	42	32.4	26.4
8	17895.00	46.0 AV	54.0	-8.0	1.70 V	42	19.6	26.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

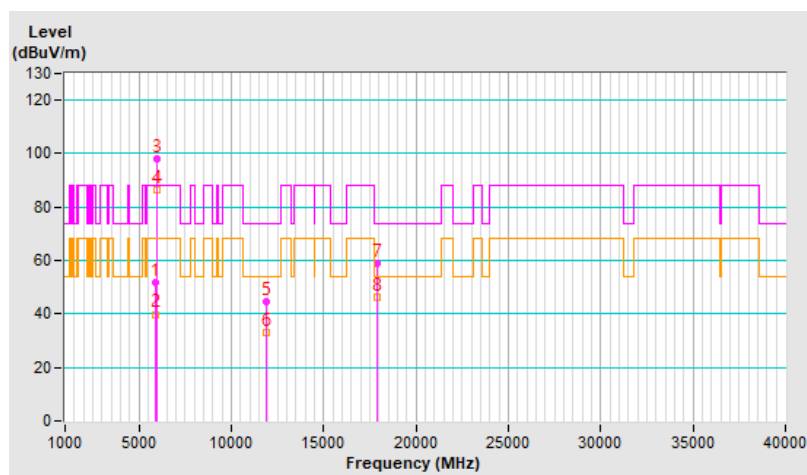


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	85.2 PK			1.13 H	268	79.3	5.9
2	*6205.00	73.7 AV			1.13 H	268	67.8	5.9
3	12410.00	46.3 PK	74.0	-27.7	1.87 H	118	31.6	14.7
4	12410.00	34.1 AV	54.0	-19.9	1.87 H	118	19.4	14.7
5	18615.00	58.6 PK	74.0	-15.4	1.77 H	17	64.0	-5.4
6	18615.00	45.8 AV	54.0	-8.2	1.77 H	17	51.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

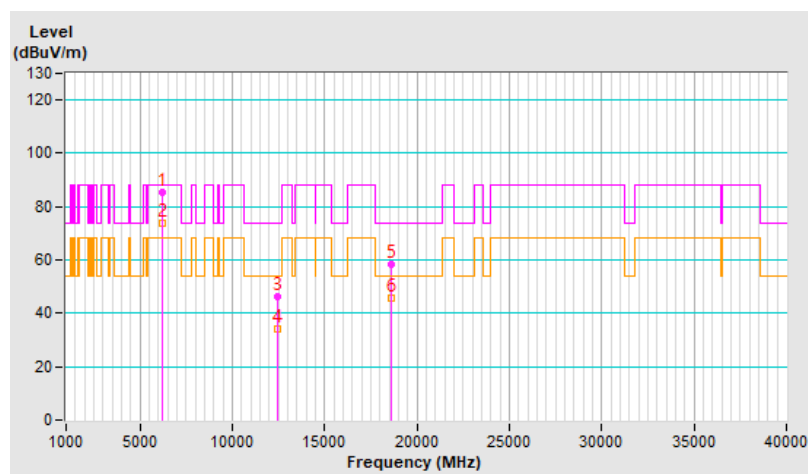


RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	97.9 PK			1.80 V	83	92.0	5.9
2	*6205.00	86.7 AV			1.80 V	83	80.8	5.9
3	12410.00	45.2 PK	74.0	-28.8	1.63 V	93	30.5	14.7
4	12410.00	33.4 AV	54.0	-20.6	1.63 V	93	18.7	14.7
5	18615.00	58.6 PK	74.0	-15.4	1.65 V	37	64.0	-5.4
6	18615.00	45.8 AV	54.0	-8.2	1.65 V	37	51.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

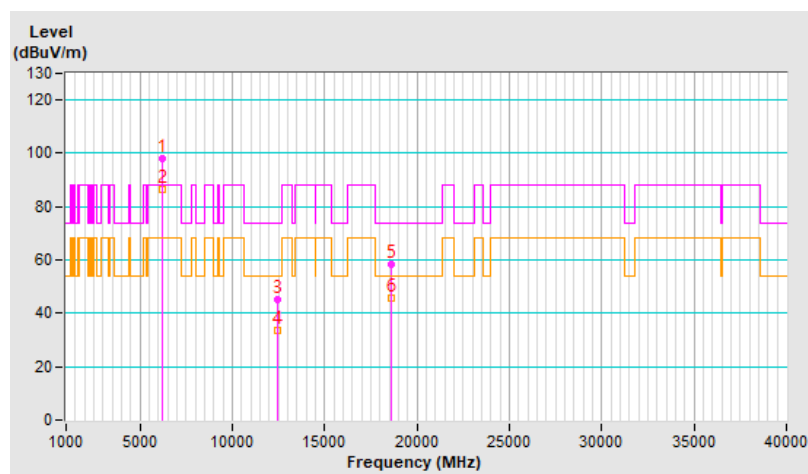


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	85.3 PK			1.20 H	273	78.6	6.7
2	*6405.00	73.9 AV			1.20 H	273	67.2	6.7
3	#12810.00	46.1 PK	88.2	-42.1	1.81 H	111	31.0	15.1
4	#12810.00	33.8 AV	68.2	-34.4	1.81 H	111	18.7	15.1
5	19215.00	58.5 PK	74.0	-15.5	1.74 H	42	63.2	-4.7
6	19215.00	45.5 AV	54.0	-8.5	1.74 H	42	50.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

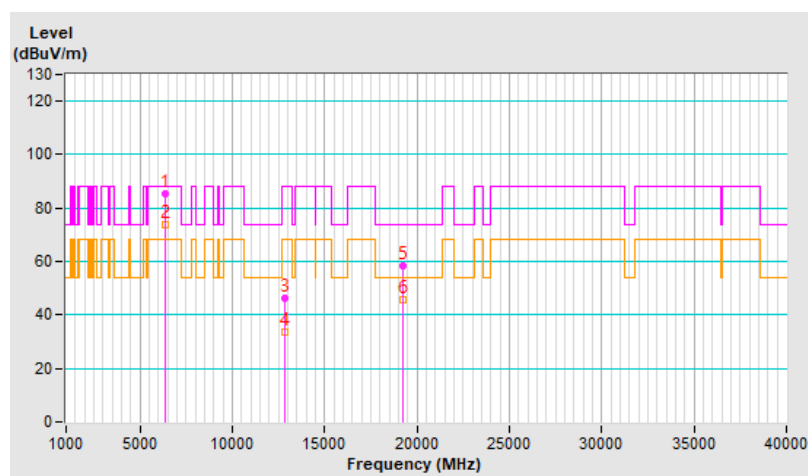


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	98.1 PK			1.79 V	102	91.4	6.7
2	*6405.00	86.7 AV			1.79 V	102	80.0	6.7
3	#12810.00	44.9 PK	88.2	-43.3	1.69 V	83	29.8	15.1
4	#12810.00	32.9 AV	68.2	-35.3	1.69 V	83	17.8	15.1
5	19215.00	58.4 PK	74.0	-15.6	1.67 V	42	63.1	-4.7
6	19215.00	45.7 AV	54.0	-8.3	1.67 V	42	50.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

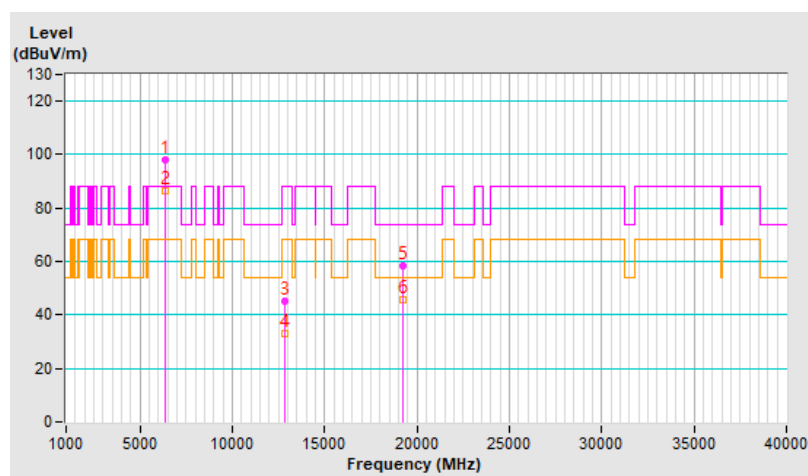


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	84.6 PK			1.19 H	259	77.1	7.5
2	*6565.00	73.5 AV			1.19 H	259	66.0	7.5
3	#13130.00	46.1 PK	88.2	-42.1	1.87 H	116	30.8	15.3
4	#13130.00	34.2 AV	68.2	-34.0	1.87 H	116	18.9	15.3
5	19695.00	57.7 PK	74.0	-16.3	1.80 H	19	62.1	-4.4
6	19695.00	44.9 AV	54.0	-9.1	1.80 H	19	49.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

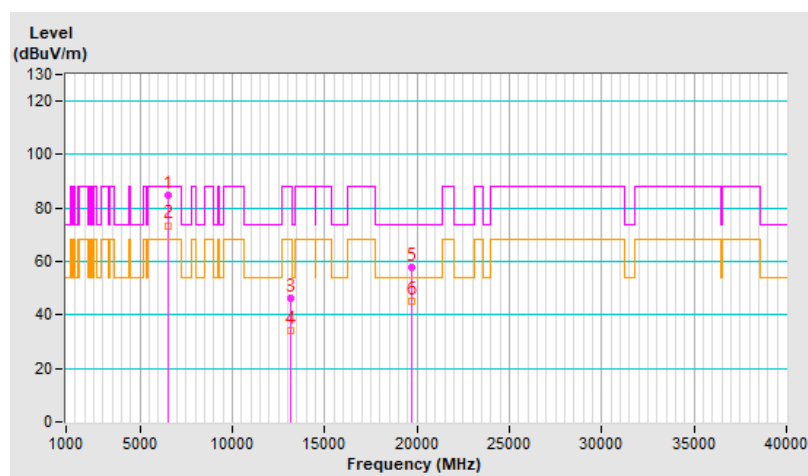


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	97.9 PK			1.78 V	78	90.4	7.5
2	*6565.00	86.7 AV			1.78 V	78	79.2	7.5
3	#13130.00	45.7 PK	88.2	-42.5	1.62 V	93	30.4	15.3
4	#13130.00	33.7 AV	68.2	-34.5	1.62 V	93	18.4	15.3
5	19695.00	59.3 PK	74.0	-14.7	1.64 V	41	63.7	-4.4
6	19695.00	46.6 AV	54.0	-7.4	1.64 V	41	51.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

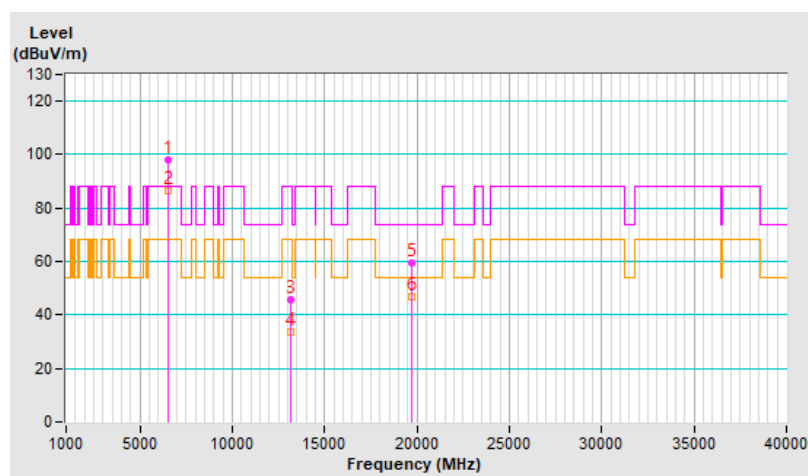


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	84.6 PK			1.11 H	259	76.9	7.7
2	*6685.00	73.2 AV			1.11 H	259	65.5	7.7
3	13370.00	46.2 PK	74.0	-27.8	1.82 H	94	30.9	15.3
4	13370.00	34.2 AV	54.0	-19.8	1.82 H	94	18.9	15.3
5	20055.00	58.9 PK	74.0	-15.1	1.80 H	31	63.3	-4.4
6	20055.00	45.8 AV	54.0	-8.2	1.80 H	31	50.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

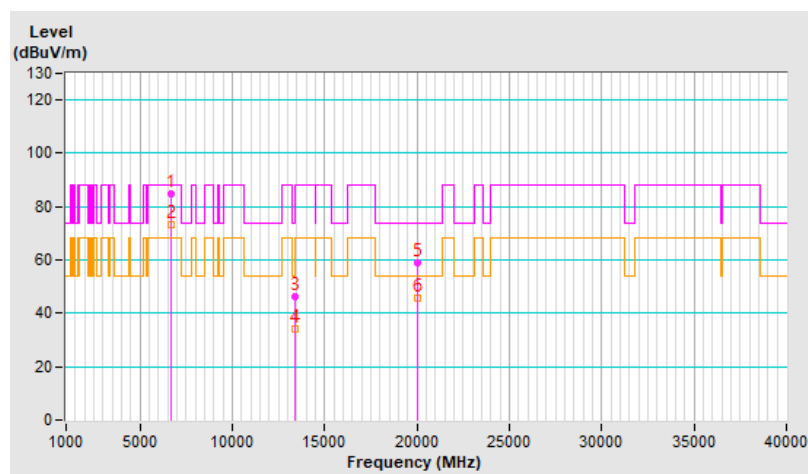


RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	98.2 PK			1.83 V	85	90.5	7.7
2	*6685.00	86.9 AV			1.83 V	85	79.2	7.7
3	13370.00	45.5 PK	74.0	-28.5	1.65 V	84	30.2	15.3
4	13370.00	33.3 AV	54.0	-20.7	1.65 V	84	18.0	15.3
5	20055.00	58.7 PK	74.0	-15.3	1.67 V	25	63.1	-4.4
6	20055.00	46.4 AV	54.0	-7.6	1.67 V	25	50.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

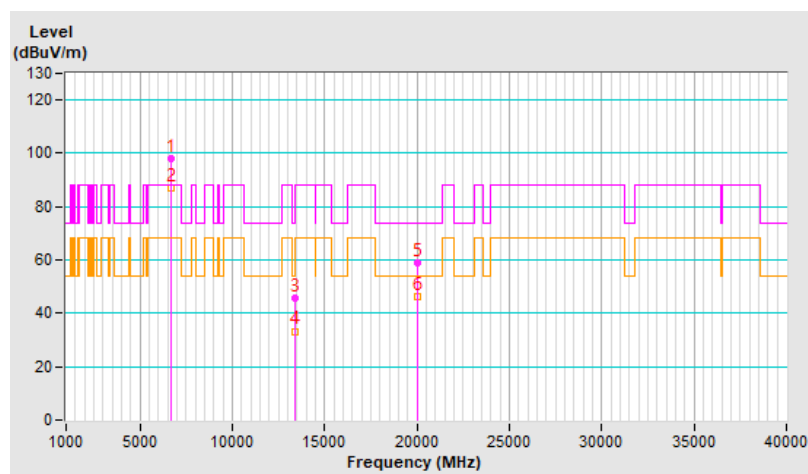


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	87.4 PK			3.11 H	131	79.2	8.2
2	*6845.00	75.0 AV			3.11 H	131	66.8	8.2
3	#13690.00	46.3 PK	88.2	-41.9	1.83 H	100	30.0	16.3
4	#13690.00	34.4 AV	68.2	-33.8	1.83 H	100	18.1	16.3
5	20535.00	58.1 PK	74.0	-15.9	1.74 H	43	61.8	-3.7
6	20535.00	45.5 AV	54.0	-8.5	1.74 H	43	49.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

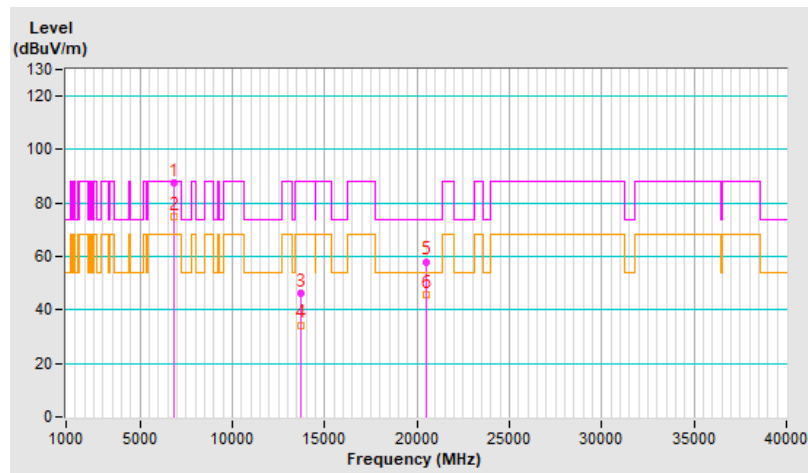


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	97.6 PK			1.75 V	80	89.4	8.2
2	*6845.00	86.2 AV			1.75 V	80	78.0	8.2
3	#13690.00	45.5 PK	88.2	-42.7	1.68 V	89	29.2	16.3
4	#13690.00	33.4 AV	68.2	-34.8	1.68 V	89	17.1	16.3
5	20535.00	58.7 PK	74.0	-15.3	1.62 V	16	62.4	-3.7
6	20535.00	45.9 AV	54.0	-8.1	1.62 V	16	49.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

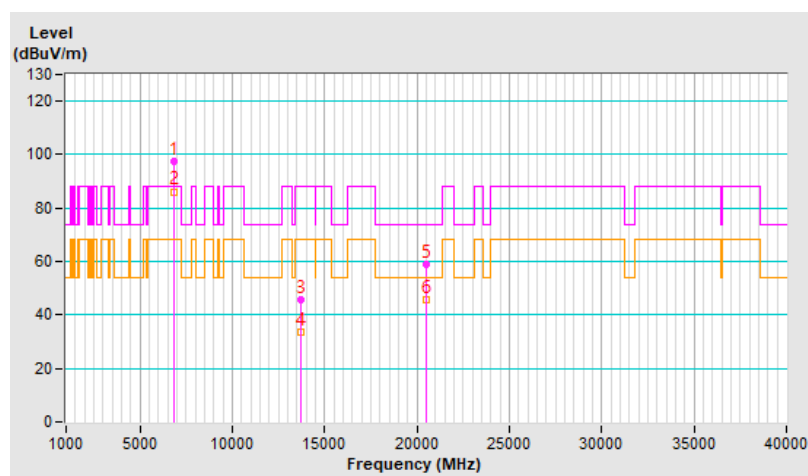


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.0 PK	88.2	-37.2	1.14 H	266	45.4	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.14 H	266	34.0	5.6
3	*5985.00	84.9 PK			1.14 H	266	79.4	5.5
4	*5985.00	73.6 AV			1.14 H	266	68.1	5.5
5	11970.00	45.9 PK	74.0	-28.1	1.82 H	105	31.4	14.5
6	11970.00	34.0 AV	54.0	-20.0	1.82 H	105	19.5	14.5
7	17955.00	58.1 PK	74.0	-15.9	1.79 H	22	29.8	28.3
8	17955.00	45.5 AV	54.0	-8.5	1.79 H	22	17.2	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

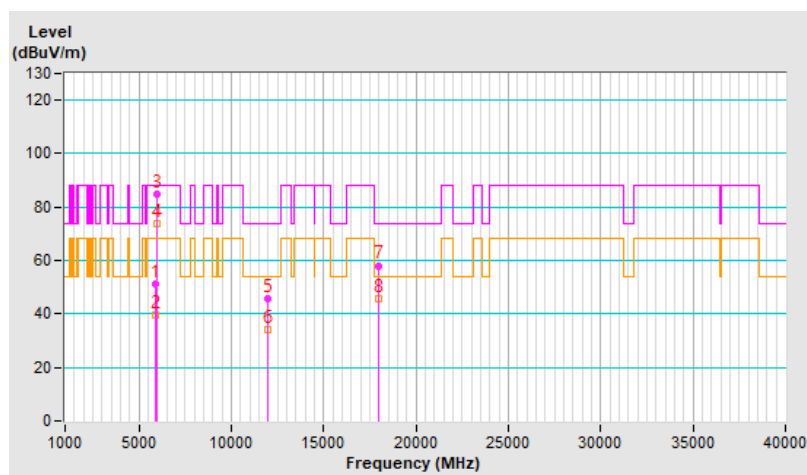


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.80 V	90	45.7	5.6
2	#5925.00	40.5 AV	68.2	-27.7	1.80 V	90	34.9	5.6
3	*5985.00	98.9 PK			1.80 V	90	93.4	5.5
4	*5985.00	87.0 AV			1.80 V	90	81.5	5.5
5	11970.00	45.8 PK	74.0	-28.2	1.72 V	93	31.3	14.5
6	11970.00	33.7 AV	54.0	-20.3	1.72 V	93	19.2	14.5
7	17955.00	58.4 PK	74.0	-15.6	1.62 V	25	30.1	28.3
8	17955.00	46.2 AV	54.0	-7.8	1.62 V	25	17.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

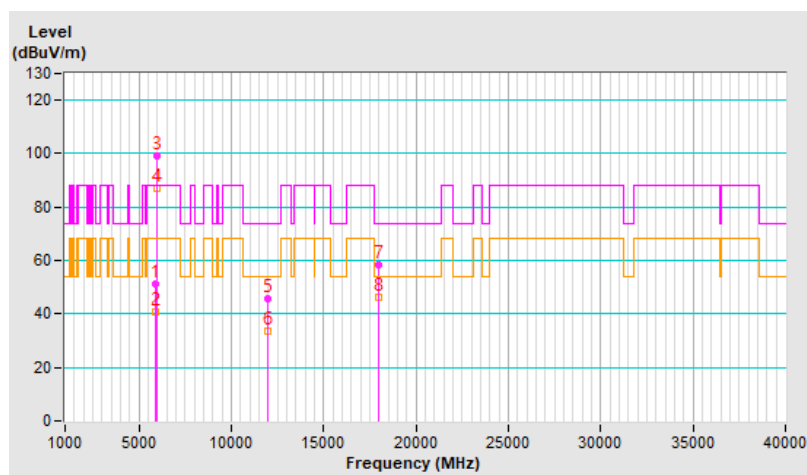


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	82.9 PK			1.24 H	268	77.0	5.9
2	*6225.00	71.9 AV			1.24 H	268	66.0	5.9
3	12450.00	46.4 PK	74.0	-27.6	1.86 H	124	31.8	14.6
4	12450.00	34.2 AV	54.0	-19.8	1.86 H	124	19.6	14.6
5	18675.00	58.1 PK	74.0	-15.9	1.80 H	26	63.4	-5.3
6	18675.00	45.1 AV	54.0	-8.9	1.80 H	26	50.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

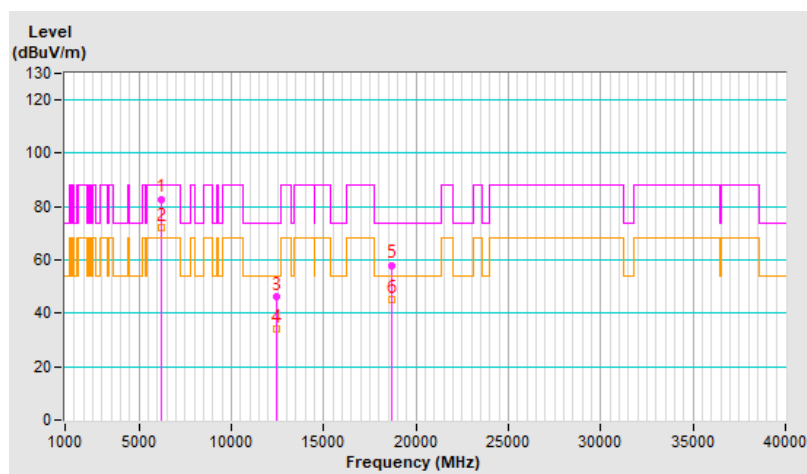


RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	98.6 PK			1.79 V	105	92.7	5.9
2	*6225.00	87.0 AV			1.79 V	105	81.1	5.9
3	12450.00	45.5 PK	74.0	-28.5	1.69 V	114	30.9	14.6
4	12450.00	33.3 AV	54.0	-20.7	1.69 V	114	18.7	14.6
5	18675.00	59.3 PK	74.0	-14.7	1.64 V	35	64.6	-5.3
6	18675.00	46.5 AV	54.0	-7.5	1.64 V	35	51.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

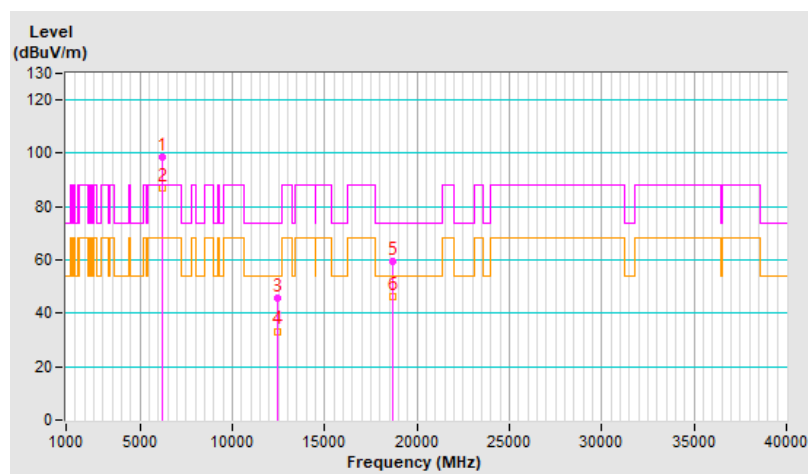


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	82.9 PK			1.23 H	271	76.3	6.6
2	*6385.00	72.1 AV			1.23 H	271	65.5	6.6
3	#12770.00	46.4 PK	88.2	-41.8	1.80 H	102	31.5	14.9
4	#12770.00	34.2 AV	68.2	-34.0	1.80 H	102	19.3	14.9
5	19155.00	58.2 PK	74.0	-15.8	1.74 H	21	62.9	-4.7
6	19155.00	45.1 AV	54.0	-8.9	1.74 H	21	49.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

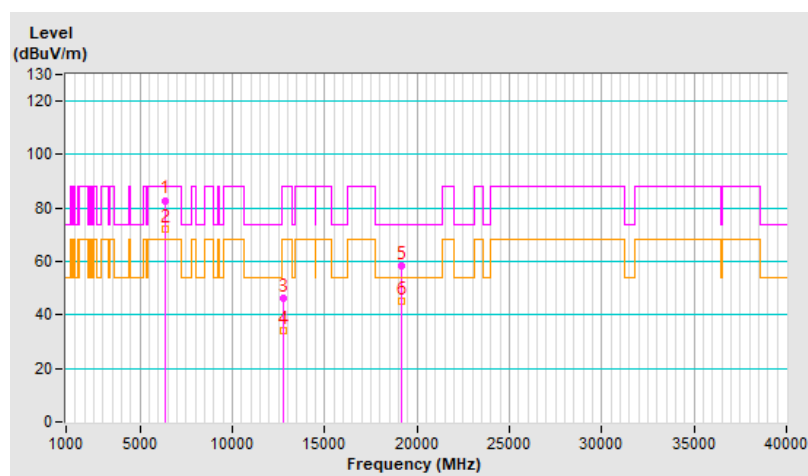


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	98.5 PK			1.77 V	83	91.9	6.6
2	*6385.00	86.8 AV			1.77 V	83	80.2	6.6
3	#12770.00	46.0 PK	88.2	-42.2	1.65 V	86	31.1	14.9
4	#12770.00	33.7 AV	68.2	-34.5	1.65 V	86	18.8	14.9
5	19155.00	58.4 PK	74.0	-15.6	1.66 V	23	63.1	-4.7
6	19155.00	45.8 AV	54.0	-8.2	1.66 V	23	50.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

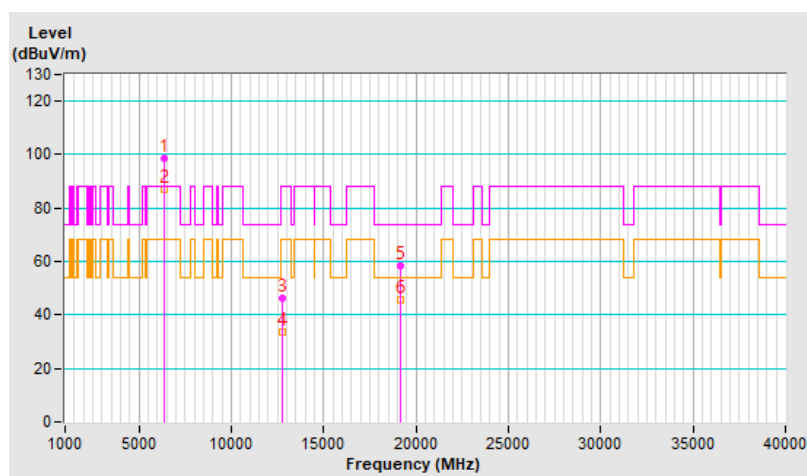


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	83.0 PK			1.25 H	265	75.2	7.8
2	*6625.00	72.1 AV			1.25 H	265	64.3	7.8
3	13250.00	46.7 PK	74.0	-27.3	1.82 H	100	31.3	15.4
4	13250.00	34.5 AV	54.0	-19.5	1.82 H	100	19.1	15.4
5	19875.00	57.8 PK	74.0	-16.2	1.76 H	36	62.3	-4.5
6	19875.00	45.0 AV	54.0	-9.0	1.76 H	36	49.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

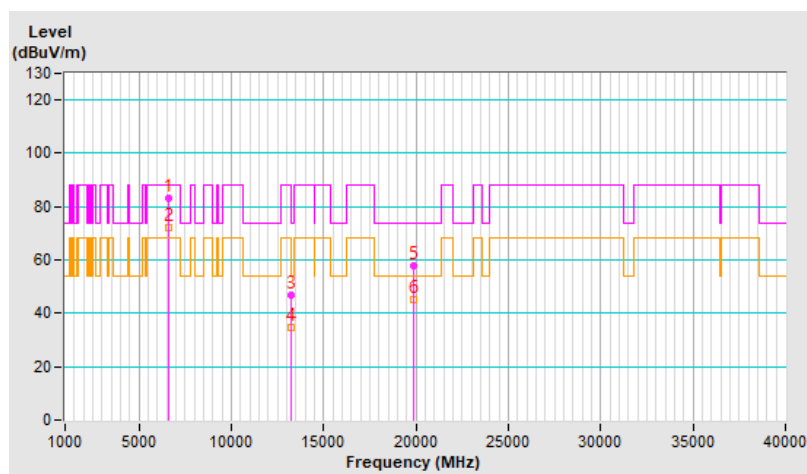


RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	99.5 PK			1.80 V	92	91.7	7.8
2	*6625.00	87.4 AV			1.80 V	92	79.6	7.8
3	13250.00	45.2 PK	74.0	-28.8	1.70 V	109	29.8	15.4
4	13250.00	33.5 AV	54.0	-20.5	1.70 V	109	18.1	15.4
5	19875.00	58.6 PK	74.0	-15.4	1.71 V	36	63.1	-4.5
6	19875.00	46.2 AV	54.0	-7.8	1.71 V	36	50.7	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

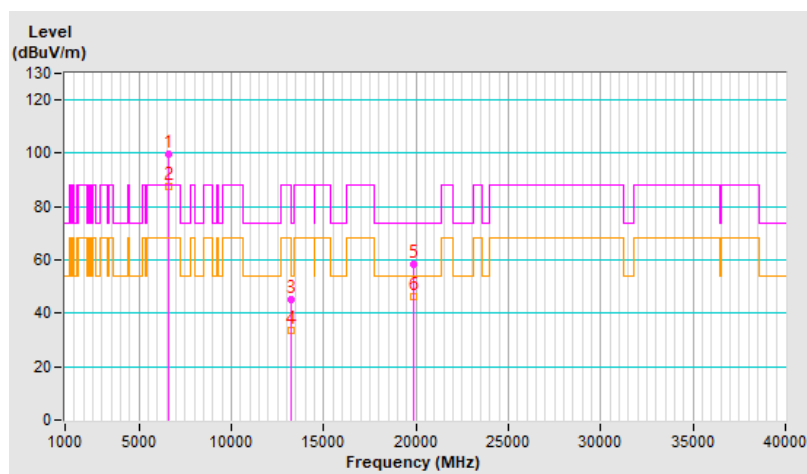


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	83.0 PK			1.32 H	267	75.4	7.6
2	*6705.00	71.9 AV			1.32 H	267	64.3	7.6
3	#13410.00	46.3 PK	88.2	-41.9	1.85 H	124	30.9	15.4
4	#13410.00	34.1 AV	68.2	-34.1	1.85 H	124	18.7	15.4
5	20115.00	57.7 PK	74.0	-16.3	1.80 H	19	61.8	-4.1
6	20115.00	44.8 AV	54.0	-9.2	1.80 H	19	48.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

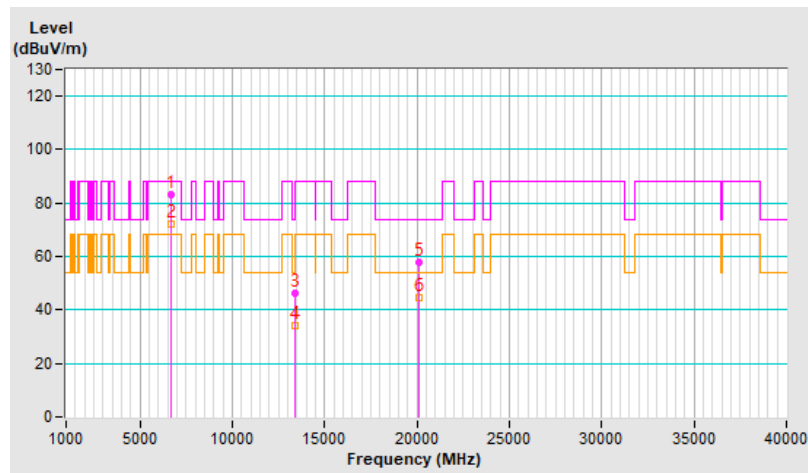


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	98.8 PK			1.85 V	78	91.2	7.6
2	*6705.00	86.9 AV			1.85 V	78	79.3	7.6
3	#13410.00	45.8 PK	88.2	-42.4	1.73 V	112	30.4	15.4
4	#13410.00	33.6 AV	68.2	-34.6	1.73 V	112	18.2	15.4
5	20115.00	58.5 PK	74.0	-15.5	1.68 V	30	62.6	-4.1
6	20115.00	45.8 AV	54.0	-8.2	1.68 V	30	49.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

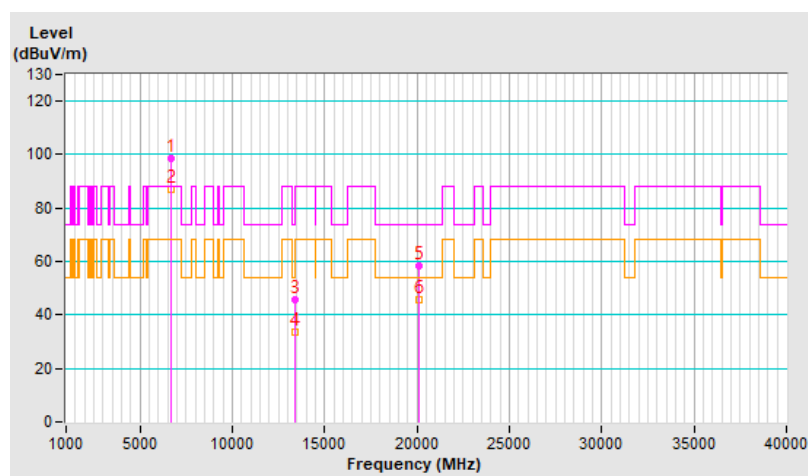


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	82.7 PK			1.27 H	264	75.0	7.7
2	*6785.00	71.7 AV			1.27 H	264	64.0	7.7
3	#13570.00	46.6 PK	88.2	-41.6	1.86 H	104	30.9	15.7
4	#13570.00	34.6 AV	68.2	-33.6	1.86 H	104	18.9	15.7
5	20355.00	58.6 PK	74.0	-15.4	1.73 H	20	62.4	-3.8
6	20355.00	45.7 AV	54.0	-8.3	1.73 H	20	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

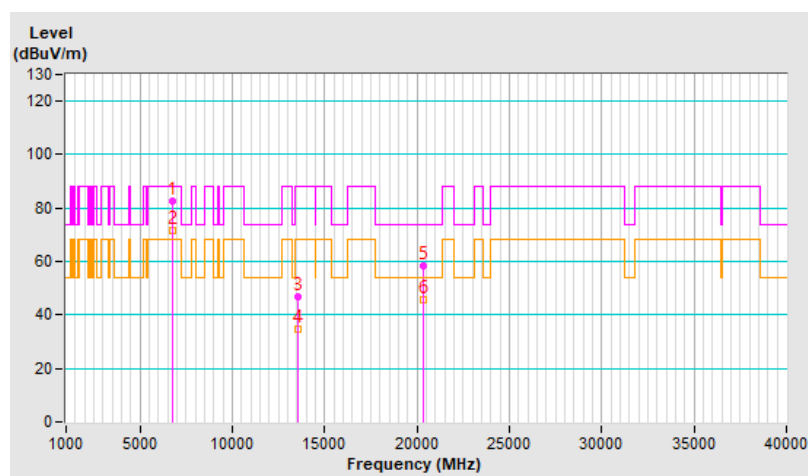


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	99.5 PK			1.74 V	91	91.8	7.7
2	*6785.00	87.8 AV			1.74 V	91	80.1	7.7
3	#13570.00	45.4 PK	88.2	-42.8	1.72 V	94	29.7	15.7
4	#13570.00	33.2 AV	68.2	-35.0	1.72 V	94	17.5	15.7
5	20355.00	58.6 PK	74.0	-15.4	1.65 V	37	62.4	-3.8
6	20355.00	46.0 AV	54.0	-8.0	1.65 V	37	49.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

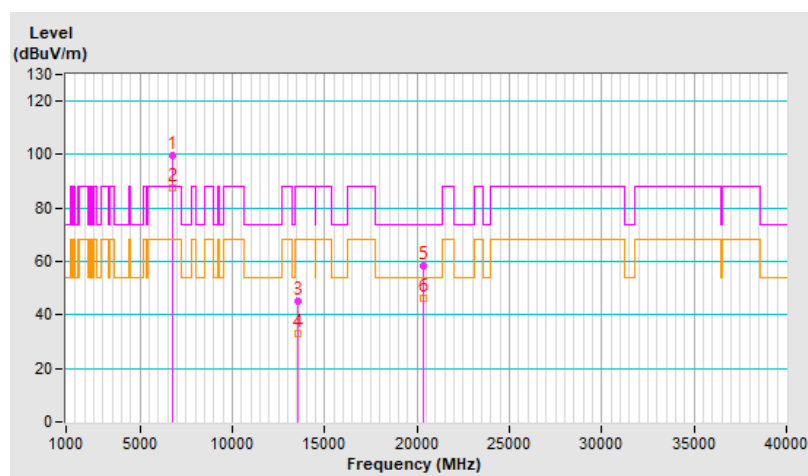


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.50 H	19	46.3	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.50 H	19	34.1	5.6
3	*6025.00	81.0 PK			1.50 H	19	75.4	5.6
4	*6025.00	69.1 AV			1.50 H	19	63.5	5.6
5	12050.00	46.2 PK	74.0	-27.8	1.83 H	117	31.6	14.6
6	12050.00	33.9 AV	54.0	-20.1	1.83 H	117	19.3	14.6
7	18075.00	58.6 PK	74.0	-15.4	1.80 H	23	63.9	-5.3
8	18075.00	45.5 AV	54.0	-8.5	1.80 H	23	50.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

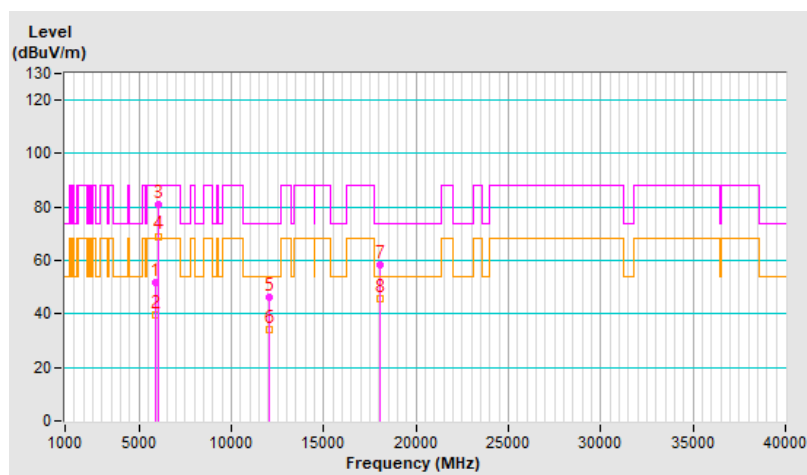


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.1 PK	88.2	-34.1	1.52 V	79	48.5	5.6
2	#5925.00	42.3 AV	68.2	-25.9	1.52 V	79	36.7	5.6
3	*6025.00	97.7 PK			1.52 V	79	92.1	5.6
4	*6025.00	85.7 AV			1.52 V	79	80.1	5.6
5	12050.00	45.6 PK	74.0	-28.4	1.66 V	103	31.0	14.6
6	12050.00	33.6 AV	54.0	-20.4	1.66 V	103	19.0	14.6
7	18075.00	59.2 PK	74.0	-14.8	1.62 V	29	64.5	-5.3
8	18075.00	46.6 AV	54.0	-7.4	1.62 V	29	51.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

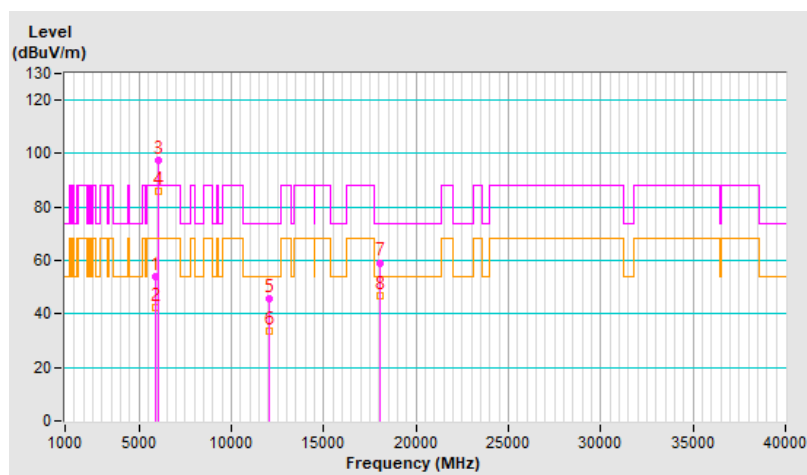


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	86.2 PK			3.32 H	118	80.4	5.8
2	*6185.00	75.3 AV			3.32 H	118	69.5	5.8
3	12370.00	46.8 PK	74.0	-27.2	1.81 H	121	32.1	14.7
4	12370.00	34.5 AV	54.0	-19.5	1.81 H	121	19.8	14.7
5	18555.00	58.3 PK	74.0	-15.7	1.77 H	29	63.7	-5.4
6	18555.00	45.6 AV	54.0	-8.4	1.77 H	29	51.0	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

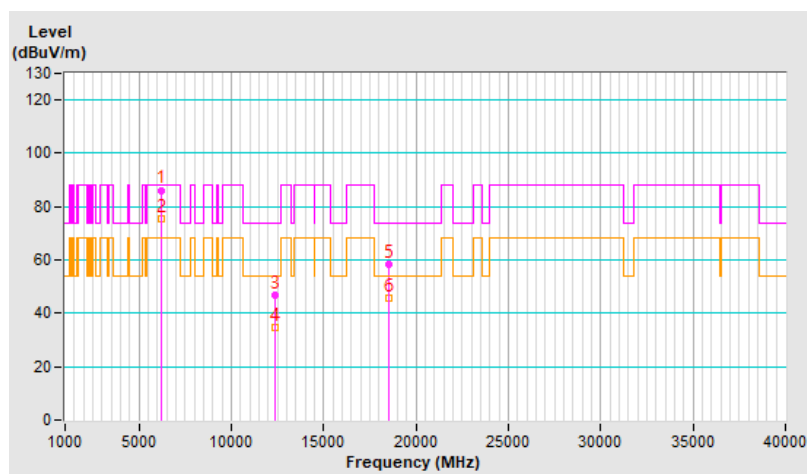


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	98.1 PK			1.57 V	91	92.3	5.8
2	*6185.00	85.9 AV			1.57 V	91	80.1	5.8
3	12370.00	45.0 PK	74.0	-29.0	1.61 V	86	30.3	14.7
4	12370.00	33.1 AV	54.0	-20.9	1.61 V	86	18.4	14.7
5	18555.00	58.9 PK	74.0	-15.1	1.74 V	39	64.3	-5.4
6	18555.00	46.2 AV	54.0	-7.8	1.74 V	39	51.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

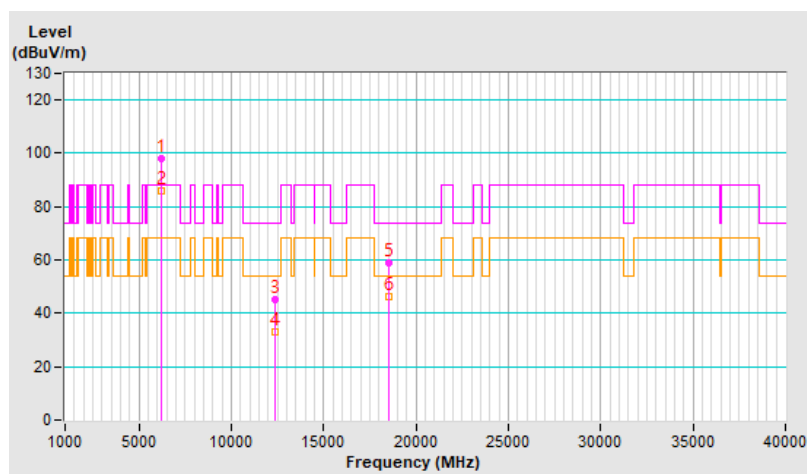


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	86.7 PK			3.29 H	136	80.3	6.4
2	*6345.00	75.7 AV			3.29 H	136	69.3	6.4
3	12690.00	46.5 PK	74.0	-27.5	1.84 H	108	31.6	14.9
4	12690.00	34.5 AV	54.0	-19.5	1.84 H	108	19.6	14.9
5	19035.00	58.8 PK	74.0	-15.2	1.81 H	24	63.7	-4.9
6	19035.00	45.7 AV	54.0	-8.3	1.81 H	24	50.6	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

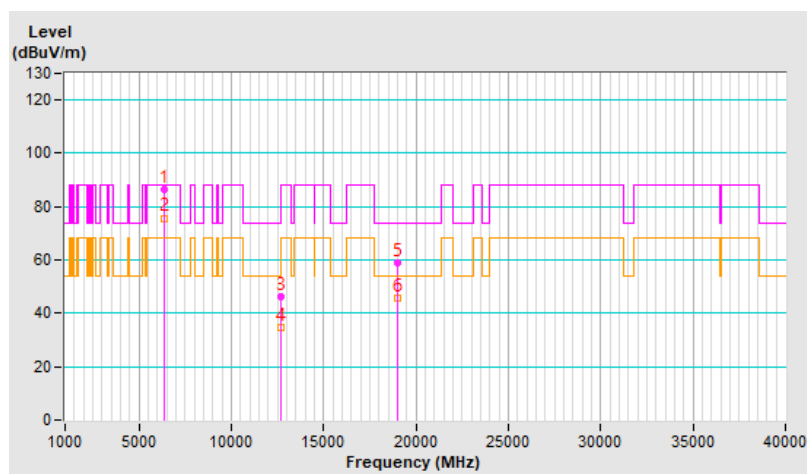


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	97.6 PK			1.56 V	69	91.2	6.4
2	*6345.00	85.9 AV			1.56 V	69	79.5	6.4
3	12690.00	45.0 PK	74.0	-29.0	1.67 V	92	30.1	14.9
4	12690.00	33.3 AV	54.0	-20.7	1.67 V	92	18.4	14.9
5	19035.00	59.2 PK	74.0	-14.8	1.74 V	30	64.1	-4.9
6	19035.00	46.4 AV	54.0	-7.6	1.74 V	30	51.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

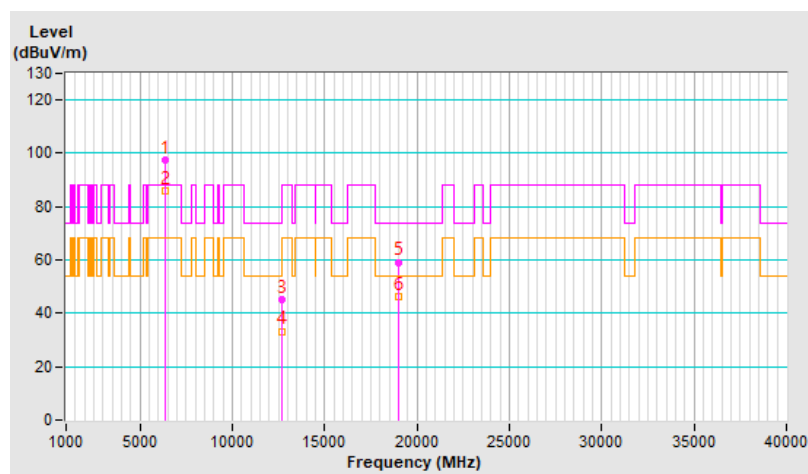


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	86.1 PK			3.30 H	133	78.3	7.8
2	*6665.00	75.2 AV			3.30 H	133	67.4	7.8
3	13330.00	46.4 PK	74.0	-27.6	1.80 H	96	31.1	15.3
4	13330.00	34.2 AV	54.0	-19.8	1.80 H	96	18.9	15.3
5	19995.00	57.6 PK	74.0	-16.4	1.77 H	38	62.0	-4.4
6	19995.00	44.9 AV	54.0	-9.1	1.77 H	38	49.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

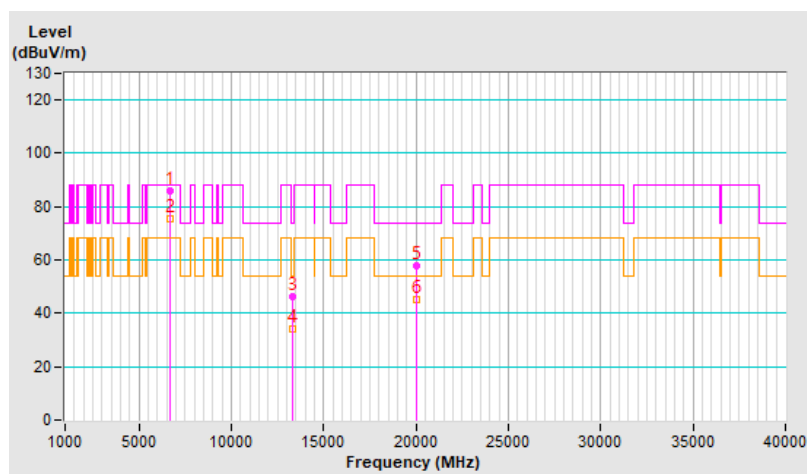


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	98.9 PK			1.77 V	270	91.1	7.8
2	*6665.00	87.9 AV			1.77 V	270	80.1	7.8
3	13330.00	45.2 PK	74.0	-28.8	1.62 V	105	29.9	15.3
4	13330.00	33.0 AV	54.0	-21.0	1.62 V	105	17.7	15.3
5	19995.00	59.1 PK	74.0	-14.9	1.70 V	36	63.5	-4.4
6	19995.00	46.3 AV	54.0	-7.7	1.70 V	36	50.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

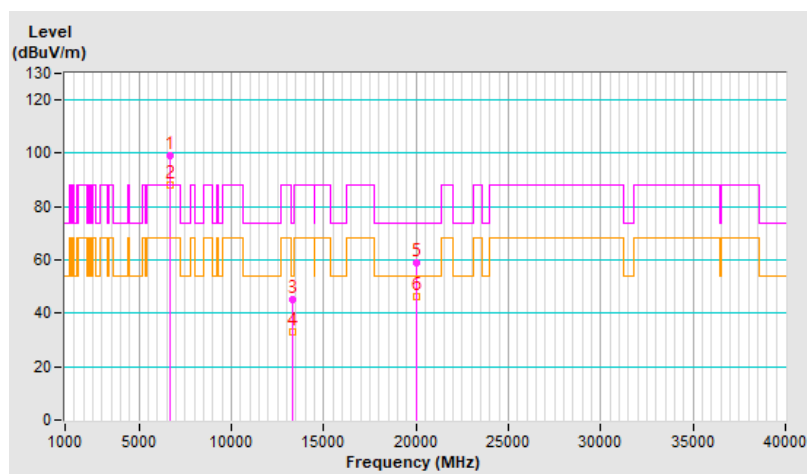


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	1.29 H	262	47.2	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.29 H	262	34.2	5.6
3	*5955.00	84.1 PK			1.29 H	262	78.6	5.5
4	*5955.00	72.9 AV			1.29 H	262	67.4	5.5
5	11910.00	46.6 PK	74.0	-27.4	1.80 H	134	32.0	14.6
6	11910.00	34.3 AV	54.0	-19.7	1.80 H	134	19.7	14.6
7	17865.00	57.8 PK	74.0	-16.2	1.79 H	15	31.9	25.9
8	17865.00	45.2 AV	54.0	-8.8	1.79 H	15	19.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

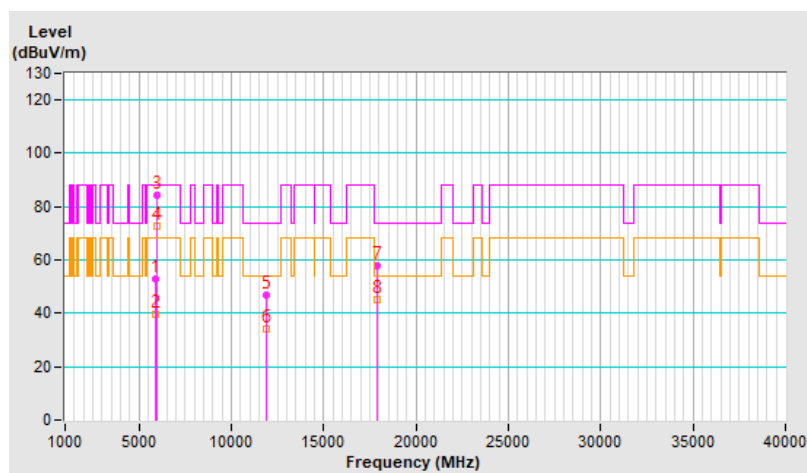


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.76 V	91	46.5	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.76 V	91	34.1	5.6
3	*5955.00	94.7 PK			1.76 V	91	89.2	5.5
4	*5955.00	85.0 AV			1.76 V	91	79.5	5.5
5	11910.00	44.6 PK	74.0	-29.4	1.66 V	99	30.0	14.6
6	11910.00	33.0 AV	54.0	-21.0	1.66 V	99	18.4	14.6
7	17865.00	59.2 PK	74.0	-14.8	1.79 V	44	33.3	25.9
8	17865.00	46.6 AV	54.0	-7.4	1.79 V	44	20.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

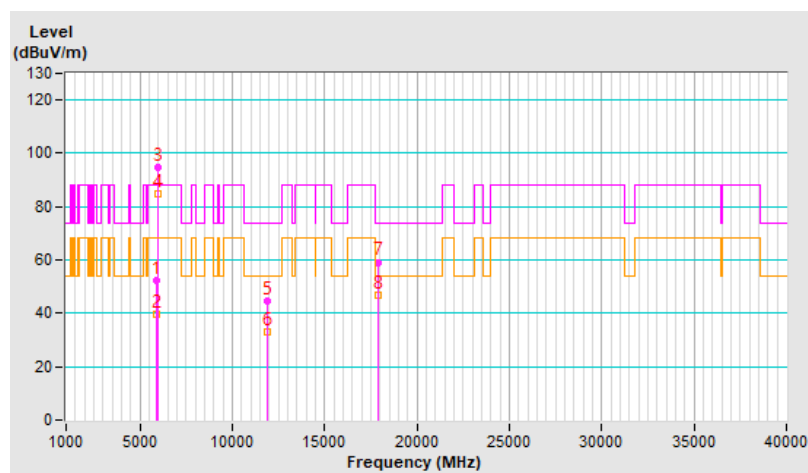


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	84.8 PK			1.32 H	267	79.0	5.8
2	*6195.00	73.4 AV			1.32 H	267	67.6	5.8
3	12390.00	46.9 PK	74.0	-27.1	1.84 H	106	32.2	14.7
4	12390.00	34.8 AV	54.0	-19.2	1.84 H	106	20.1	14.7
5	18585.00	58.1 PK	74.0	-15.9	1.79 H	38	63.6	-5.5
6	18585.00	45.3 AV	54.0	-8.7	1.79 H	38	50.8	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

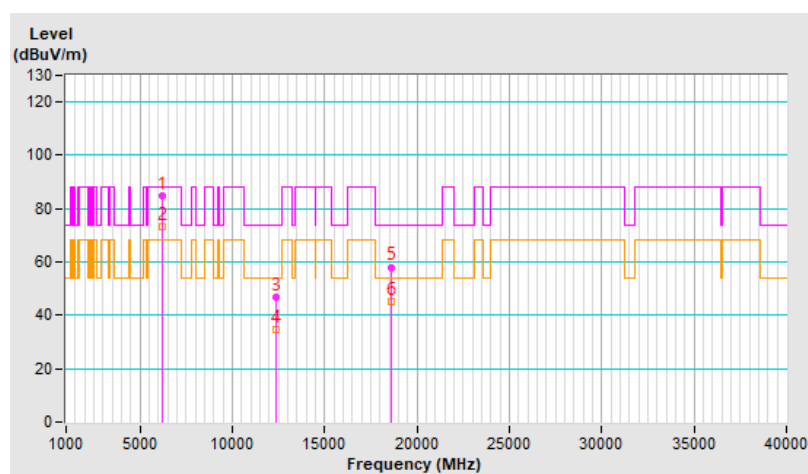


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	94.3 PK			1.78 V	106	88.5	5.8
2	*6195.00	84.7 AV			1.78 V	106	78.9	5.8
3	12390.00	44.8 PK	74.0	-29.2	1.63 V	97	30.1	14.7
4	12390.00	32.7 AV	54.0	-21.3	1.63 V	97	18.0	14.7
5	18585.00	58.4 PK	74.0	-15.6	1.77 V	43	63.9	-5.5
6	18585.00	45.8 AV	54.0	-8.2	1.77 V	43	51.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

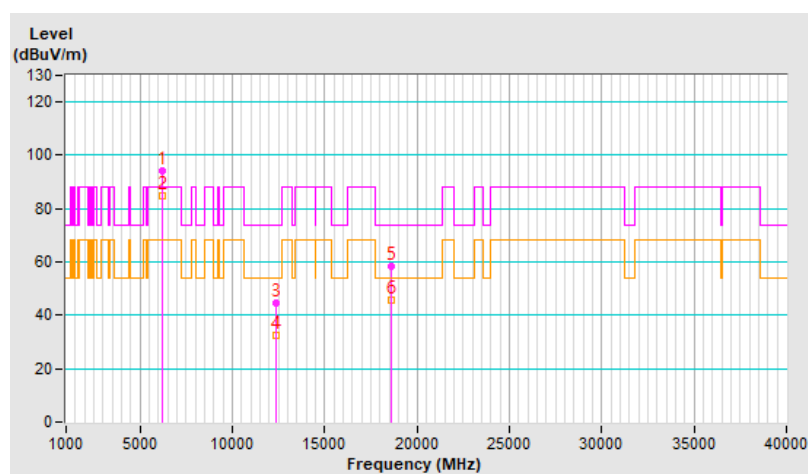


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	83.4 PK			1.28 H	266	76.6	6.8
2	*6415.00	72.5 AV			1.28 H	266	65.7	6.8
3	#12830.00	46.9 PK	88.2	-41.3	1.81 H	123	31.8	15.1
4	#12830.00	34.6 AV	68.2	-33.6	1.81 H	123	19.5	15.1
5	19245.00	57.7 PK	74.0	-16.3	1.80 H	20	62.3	-4.6
6	19245.00	45.2 AV	54.0	-8.8	1.80 H	20	49.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

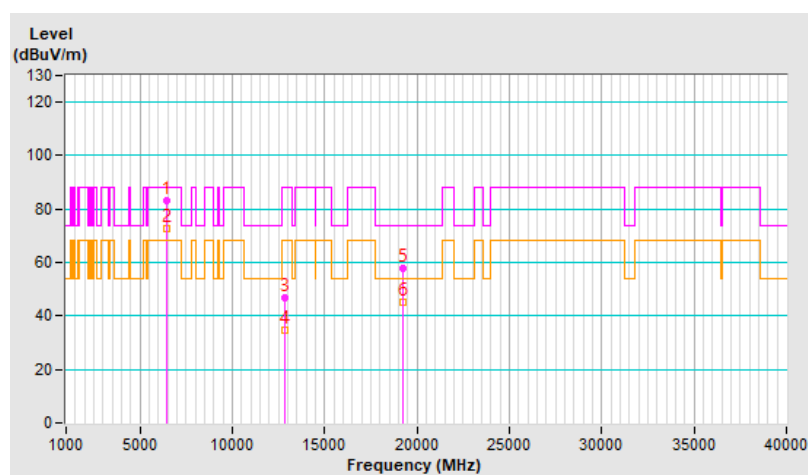


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.3 PK			1.75 V	107	88.5	6.8
2	*6415.00	85.4 AV			1.75 V	107	78.6	6.8
3	#12830.00	45.4 PK	88.2	-42.8	1.59 V	91	30.3	15.1
4	#12830.00	33.5 AV	68.2	-34.7	1.59 V	91	18.4	15.1
5	19245.00	59.6 PK	74.0	-14.4	1.74 V	44	64.2	-4.6
6	19245.00	46.6 AV	54.0	-7.4	1.74 V	44	51.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

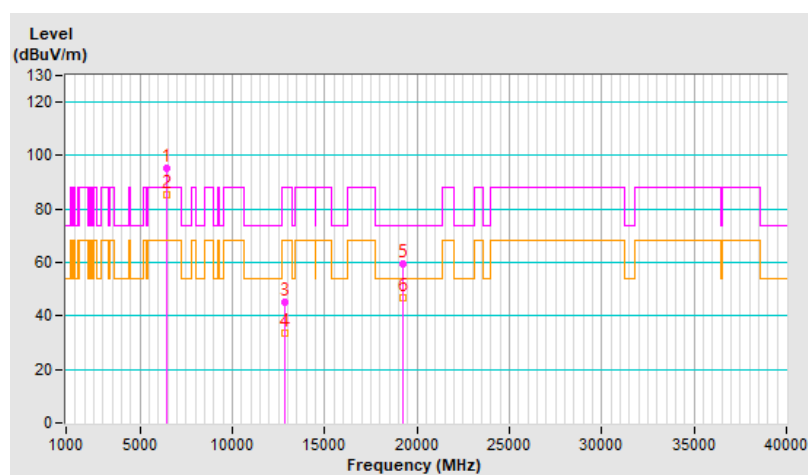


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	84.2 PK			1.31 H	257	76.8	7.4
2	*6535.00	73.0 AV			1.31 H	257	65.6	7.4
3	#13070.00	47.3 PK	88.2	-40.9	1.84 H	115	32.2	15.1
4	#13070.00	34.9 AV	68.2	-33.3	1.84 H	115	19.8	15.1
5	19605.00	58.4 PK	74.0	-15.6	1.76 H	16	63.2	-4.8
6	19605.00	45.6 AV	54.0	-8.4	1.76 H	16	50.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

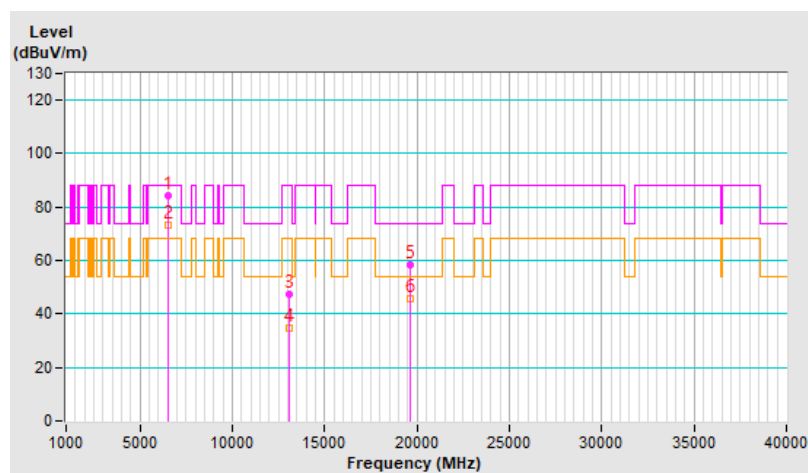


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	95.2 PK			1.80 V	101	87.8	7.4
2	*6535.00	85.4 AV			1.80 V	101	78.0	7.4
3	#13070.00	44.6 PK	88.2	-43.6	1.65 V	72	29.5	15.1
4	#13070.00	32.7 AV	68.2	-35.5	1.65 V	72	17.6	15.1
5	19605.00	58.5 PK	74.0	-15.5	1.78 V	29	63.3	-4.8
6	19605.00	46.0 AV	54.0	-8.0	1.78 V	29	50.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

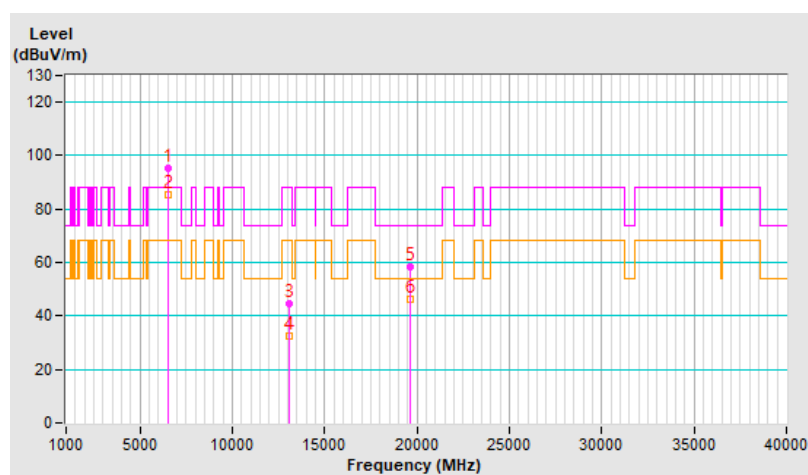


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	84.2 PK			1.30 H	248	76.5	7.7
2	*6695.00	73.0 AV			1.30 H	248	65.3	7.7
3	13390.00	47.3 PK	74.0	-26.7	1.78 H	108	31.9	15.4
4	13390.00	34.7 AV	54.0	-19.3	1.78 H	108	19.3	15.4
5	20085.00	58.5 PK	74.0	-15.5	1.75 H	42	62.8	-4.3
6	20085.00	46.1 AV	54.0	-7.9	1.75 H	42	50.4	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

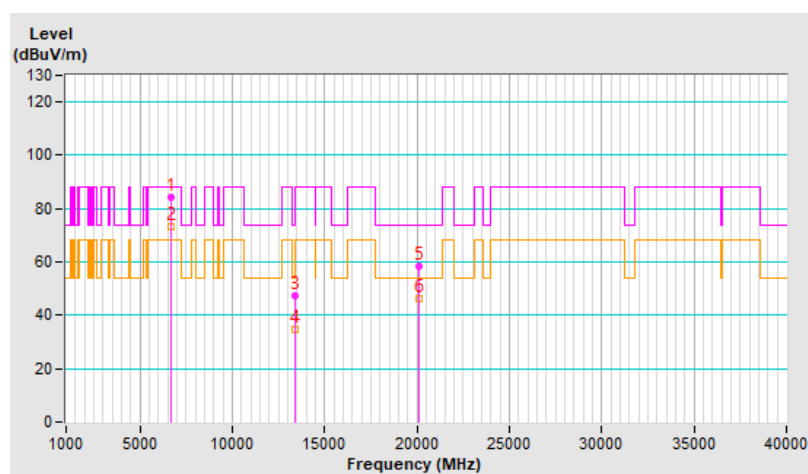


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	94.8 PK			1.76 V	97	87.1	7.7
2	*6695.00	84.9 AV			1.76 V	97	77.2	7.7
3	13390.00	45.3 PK	74.0	-28.7	1.60 V	85	29.9	15.4
4	13390.00	33.1 AV	54.0	-20.9	1.60 V	85	17.7	15.4
5	20085.00	59.2 PK	74.0	-14.8	1.69 V	39	63.5	-4.3
6	20085.00	46.6 AV	54.0	-7.4	1.69 V	39	50.9	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

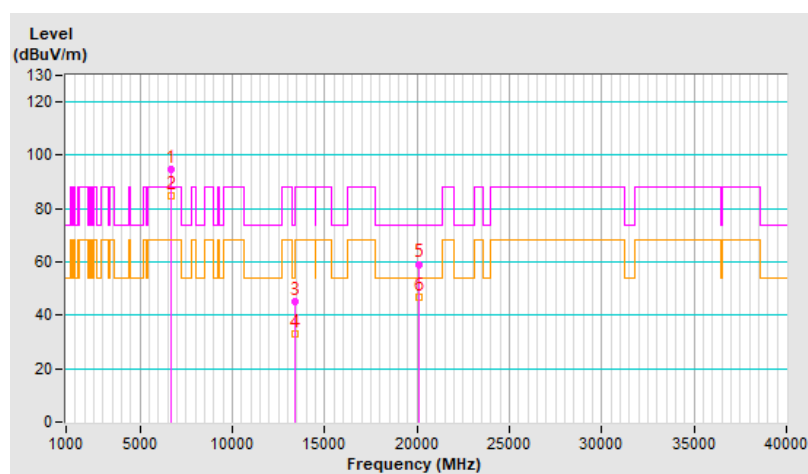


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	80.9 PK			1.50 H	38	72.7	8.2
2	*6855.00	71.8 AV			1.50 H	38	63.6	8.2
3	#13710.00	46.8 PK	88.2	-41.4	1.82 H	112	30.5	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.82 H	112	18.3	16.3
5	20565.00	57.9 PK	74.0	-16.1	1.73 H	40	61.6	-3.7
6	20565.00	45.4 AV	54.0	-8.6	1.73 H	40	49.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

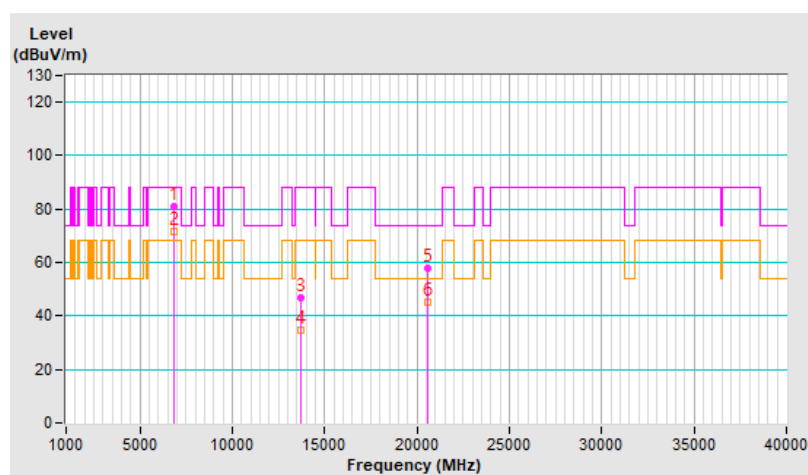


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.4 PK			1.70 V	81	89.2	8.2
2	*6855.00	86.8 AV			1.70 V	81	78.6	8.2
3	#13710.00	45.1 PK	88.2	-43.1	1.57 V	89	28.8	16.3
4	#13710.00	33.3 AV	68.2	-34.9	1.57 V	89	17.0	16.3
5	20565.00	59.1 PK	74.0	-14.9	1.77 V	45	62.8	-3.7
6	20565.00	46.3 AV	54.0	-7.7	1.77 V	45	50.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

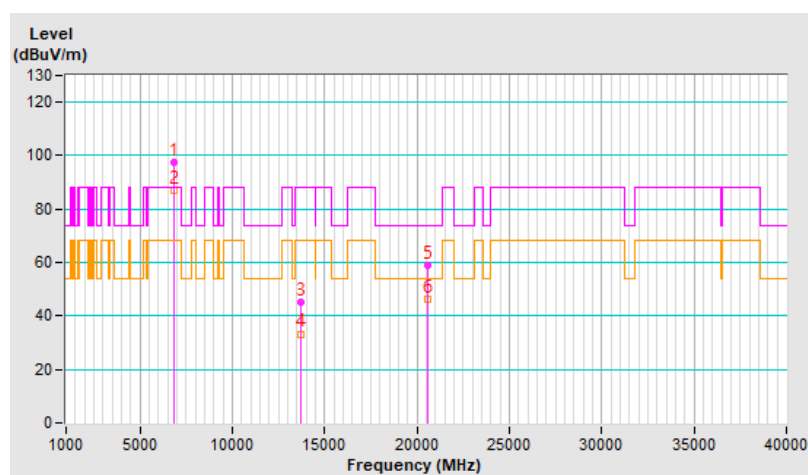


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.24 H	268	46.5	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.24 H	268	34.1	5.6
3	*5955.00	81.7 PK			1.24 H	268	76.2	5.5
4	*5955.00	71.9 AV			1.24 H	268	66.4	5.5
5	11910.00	46.9 PK	74.0	-27.1	1.78 H	127	32.3	14.6
6	11910.00	34.6 AV	54.0	-19.4	1.78 H	127	20.0	14.6
7	17865.00	58.4 PK	74.0	-15.6	1.80 H	18	32.5	25.9
8	17865.00	45.7 AV	54.0	-8.3	1.80 H	18	19.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

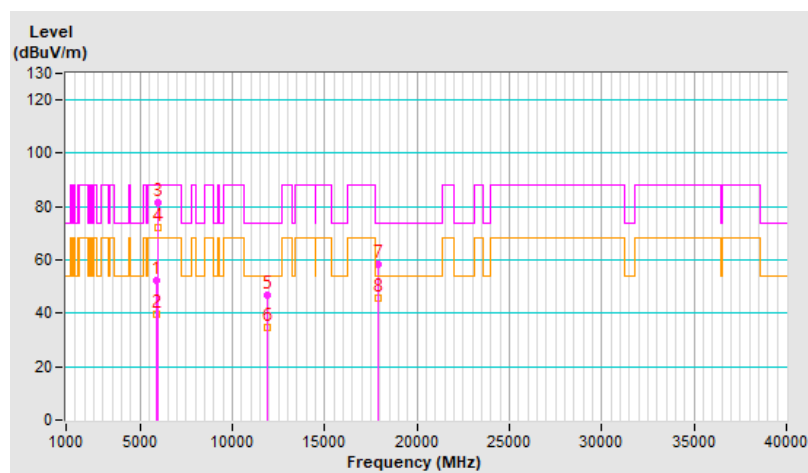


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.0 PK	88.2	-35.2	1.70 V	269	47.4	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.70 V	269	34.1	5.6
3	*5955.00	97.0 PK			1.70 V	269	91.5	5.5
4	*5955.00	86.4 AV			1.70 V	269	80.9	5.5
5	11910.00	45.0 PK	74.0	-29.0	1.61 V	92	30.4	14.6
6	11910.00	33.2 AV	54.0	-20.8	1.61 V	92	18.6	14.6
7	17865.00	59.3 PK	74.0	-14.7	1.71 V	24	33.4	25.9
8	17865.00	46.4 AV	54.0	-7.6	1.71 V	24	20.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

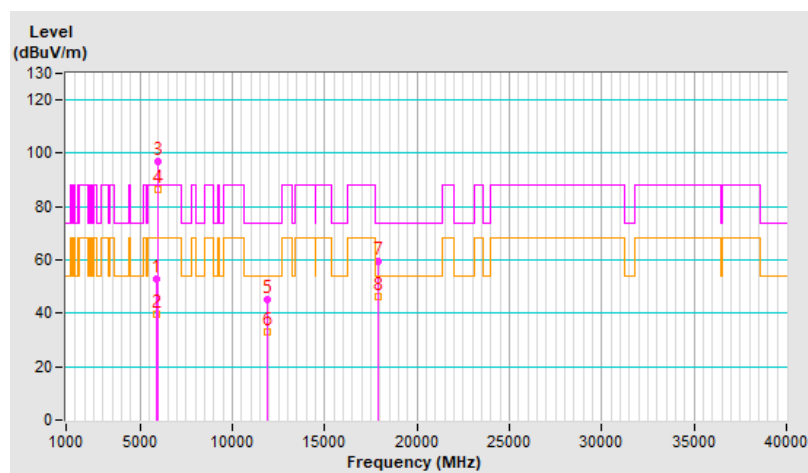


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	81.9 PK			1.22 H	270	76.1	5.8
2	*6195.00	72.0 AV			1.22 H	270	66.2	5.8
3	12390.00	46.4 PK	74.0	-27.6	1.82 H	108	31.7	14.7
4	12390.00	34.1 AV	54.0	-19.9	1.82 H	108	19.4	14.7
5	18585.00	58.6 PK	74.0	-15.4	1.76 H	36	64.1	-5.5
6	18585.00	45.8 AV	54.0	-8.2	1.76 H	36	51.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

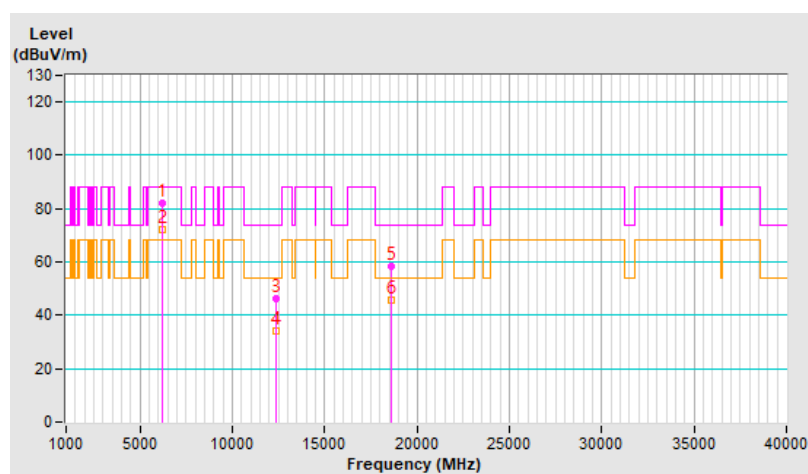


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	97.4 PK			1.69 V	278	91.6	5.8
2	*6195.00	86.8 AV			1.69 V	278	81.0	5.8
3	12390.00	44.3 PK	74.0	-29.7	1.57 V	94	29.6	14.7
4	12390.00	32.7 AV	54.0	-21.3	1.57 V	94	18.0	14.7
5	18585.00	58.7 PK	74.0	-15.3	1.69 V	24	64.2	-5.5
6	18585.00	45.9 AV	54.0	-8.1	1.69 V	24	51.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

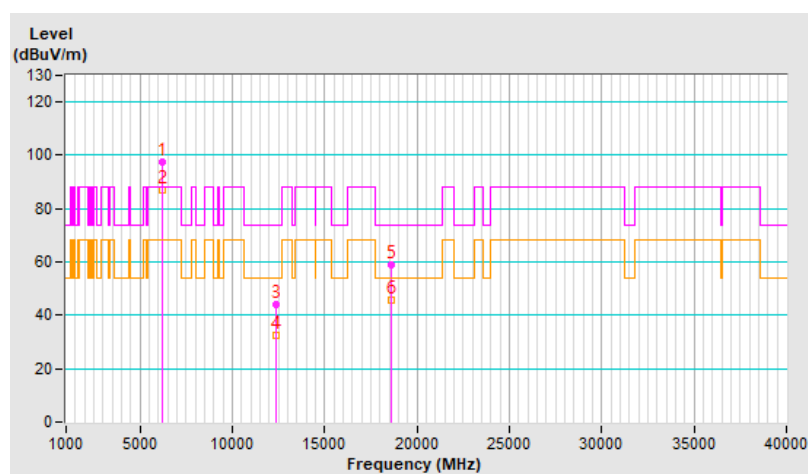


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	82.2 PK			1.30 H	269	75.4	6.8
2	*6415.00	72.3 AV			1.30 H	269	65.5	6.8
3	#12830.00	47.4 PK	88.2	-40.8	1.82 H	128	32.3	15.1
4	#12830.00	34.9 AV	68.2	-33.3	1.82 H	128	19.8	15.1
5	19245.00	58.6 PK	74.0	-15.4	1.74 H	15	63.2	-4.6
6	19245.00	45.7 AV	54.0	-8.3	1.74 H	15	50.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

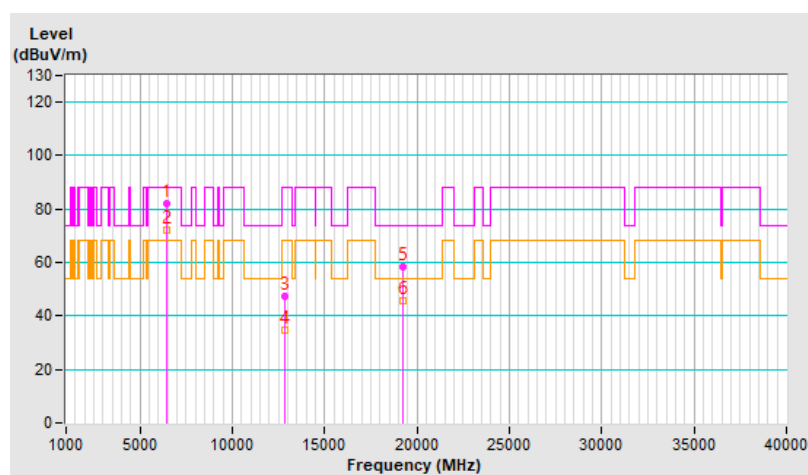


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.8 PK			1.70 V	266	90.0	6.8
2	*6415.00	86.1 AV			1.70 V	266	79.3	6.8
3	#12830.00	45.0 PK	88.2	-43.2	1.63 V	78	29.9	15.1
4	#12830.00	32.8 AV	68.2	-35.4	1.63 V	78	17.7	15.1
5	19245.00	59.0 PK	74.0	-15.0	1.71 V	38	63.6	-4.6
6	19245.00	46.4 AV	54.0	-7.6	1.71 V	38	51.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

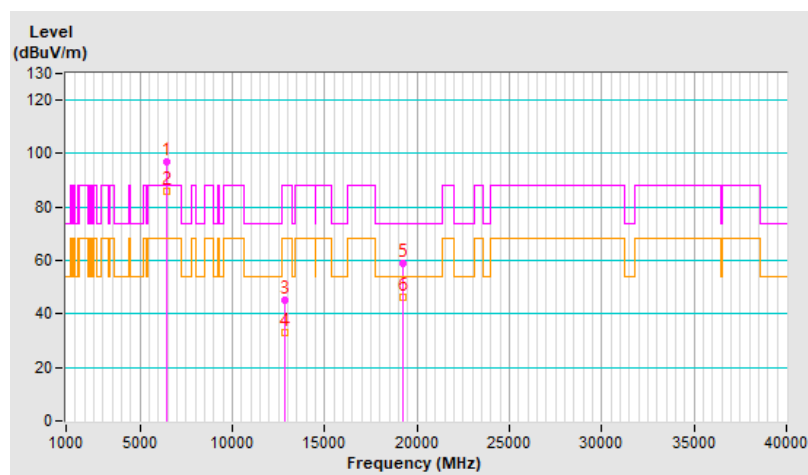


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	81.9 PK			1.22 H	279	74.5	7.4
2	*6535.00	72.0 AV			1.22 H	279	64.6	7.4
3	#13070.00	47.4 PK	88.2	-40.8	1.79 H	115	32.3	15.1
4	#13070.00	34.8 AV	68.2	-33.4	1.79 H	115	19.7	15.1
5	19605.00	58.5 PK	74.0	-15.5	1.72 H	20	63.3	-4.8
6	19605.00	46.0 AV	54.0	-8.0	1.72 H	20	50.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

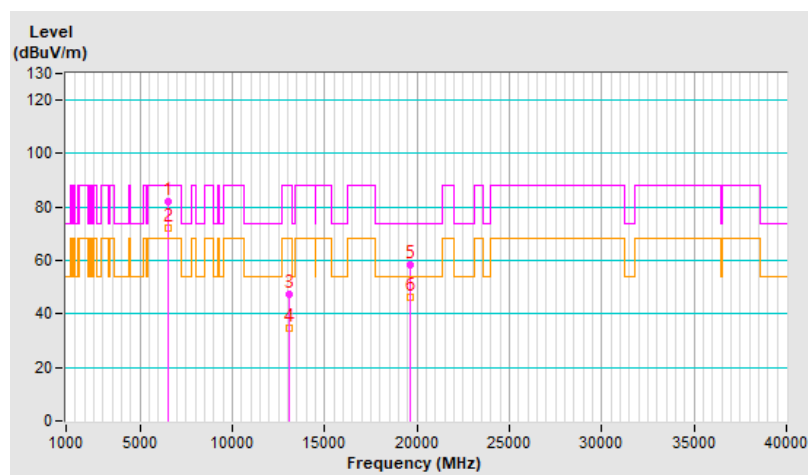


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.0 PK			1.67 V	282	89.6	7.4
2	*6535.00	86.2 AV			1.67 V	282	78.8	7.4
3	#13070.00	44.6 PK	88.2	-43.6	1.60 V	83	29.5	15.1
4	#13070.00	33.0 AV	68.2	-35.2	1.60 V	83	17.9	15.1
5	19605.00	58.2 PK	74.0	-15.8	1.68 V	42	63.0	-4.8
6	19605.00	45.7 AV	54.0	-8.3	1.68 V	42	50.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

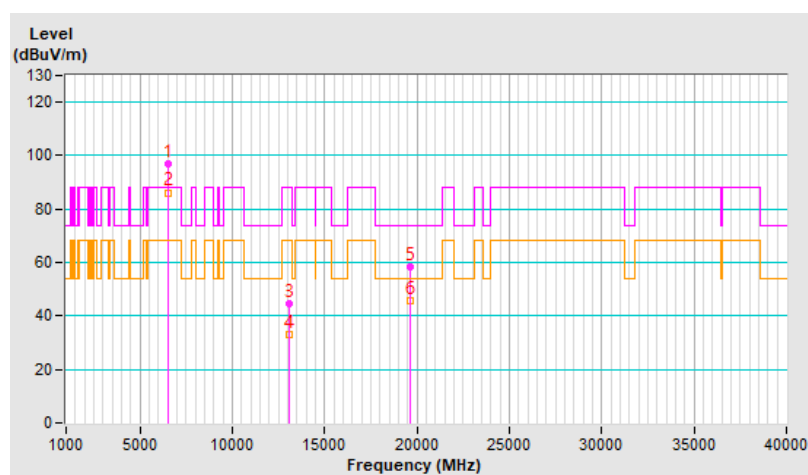


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	81.9 PK			1.26 H	261	74.2	7.7
2	*6695.00	72.2 AV			1.26 H	261	64.5	7.7
3	13390.00	46.5 PK	74.0	-27.5	1.77 H	126	31.1	15.4
4	13390.00	34.1 AV	54.0	-19.9	1.77 H	126	18.7	15.4
5	20085.00	57.9 PK	74.0	-16.1	1.73 H	29	62.2	-4.3
6	20085.00	45.2 AV	54.0	-8.8	1.73 H	29	49.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

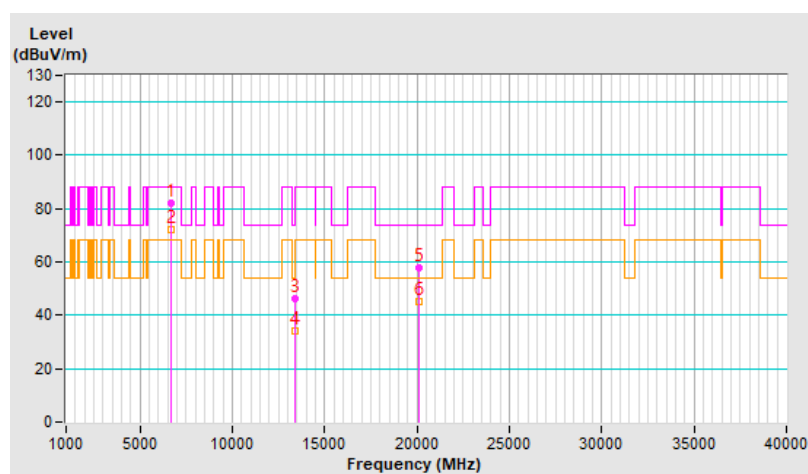


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	96.9 PK			1.72 V	255	89.2	7.7
2	*6695.00	86.2 AV			1.72 V	255	78.5	7.7
3	13390.00	45.3 PK	74.0	-28.7	1.65 V	93	29.9	15.4
4	13390.00	33.1 AV	54.0	-20.9	1.65 V	93	17.7	15.4
5	20085.00	58.7 PK	74.0	-15.3	1.74 V	54	63.0	-4.3
6	20085.00	46.1 AV	54.0	-7.9	1.74 V	54	50.4	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

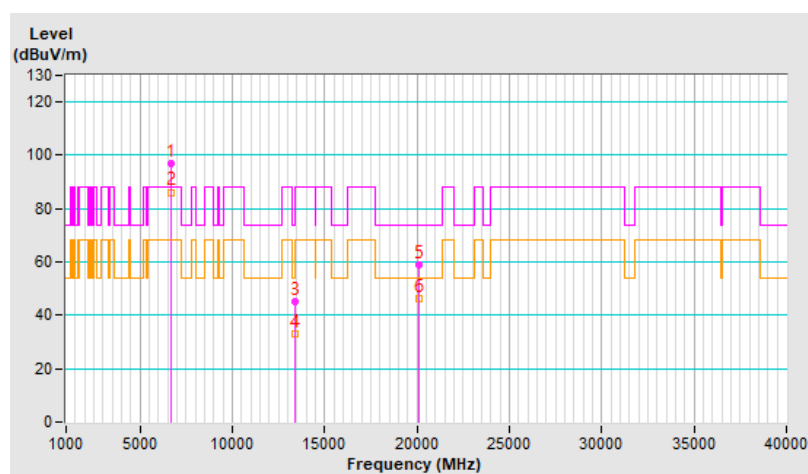


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	80.2 PK			1.33 H	34	72.0	8.2
2	*6855.00	70.7 AV			1.33 H	34	62.5	8.2
3	#13710.00	47.3 PK	88.2	-40.9	1.82 H	137	31.0	16.3
4	#13710.00	35.0 AV	68.2	-33.2	1.82 H	137	18.7	16.3
5	20565.00	58.2 PK	74.0	-15.8	1.72 H	40	61.9	-3.7
6	20565.00	45.4 AV	54.0	-8.6	1.72 H	40	49.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

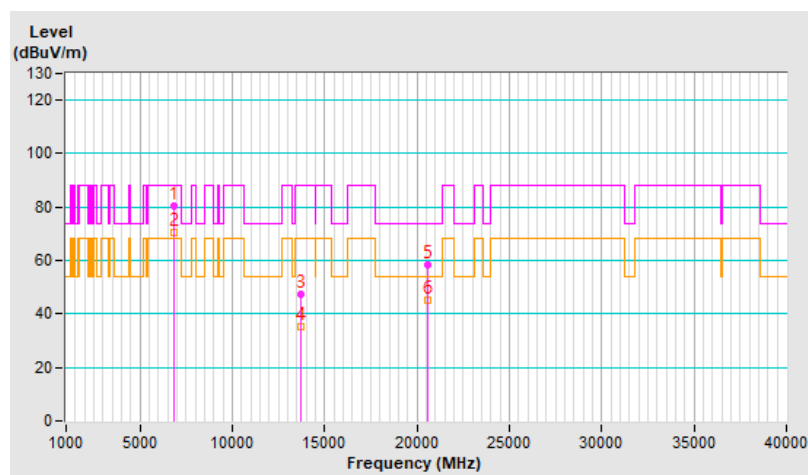


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.3 PK			1.71 V	80	89.1	8.2
2	*6855.00	86.6 AV			1.71 V	80	78.4	8.2
3	#13710.00	44.9 PK	88.2	-43.3	1.60 V	78	28.6	16.3
4	#13710.00	33.0 AV	68.2	-35.2	1.60 V	78	16.7	16.3
5	20565.00	59.1 PK	74.0	-14.9	1.72 V	34	62.8	-3.7
6	20565.00	46.6 AV	54.0	-7.4	1.72 V	34	50.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

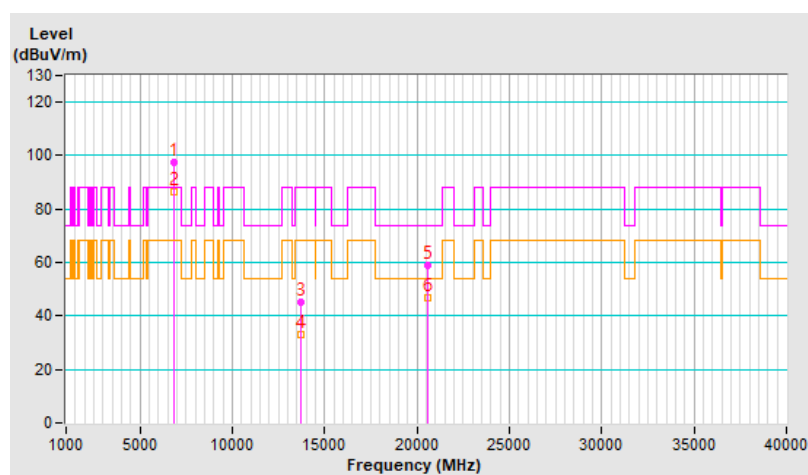


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.5 PK	88.2	-35.7	1.00 H	250	46.9	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.00 H	250	34.1	5.6
3	*5955.00	84.7 PK			1.00 H	250	79.2	5.5
4	*5955.00	75.2 AV			1.00 H	250	69.7	5.5
5	11910.00	47.0 PK	74.0	-27.0	1.84 H	110	32.4	14.6
6	11910.00	34.8 AV	54.0	-19.2	1.84 H	110	20.2	14.6
7	17865.00	58.0 PK	74.0	-16.0	1.80 H	30	32.1	25.9
8	17865.00	45.1 AV	54.0	-8.9	1.80 H	30	19.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

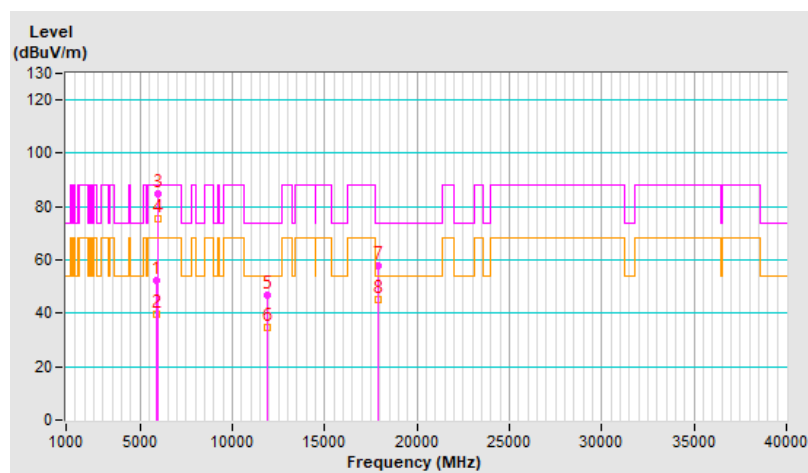


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.4 PK	88.2	-35.8	1.35 V	80	46.8	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.35 V	80	34.2	5.6
3	*5955.00	98.6 PK			1.35 V	80	93.1	5.5
4	*5955.00	86.8 AV			1.35 V	80	81.3	5.5
5	11910.00	44.8 PK	74.0	-29.2	1.57 V	86	30.2	14.6
6	11910.00	33.0 AV	54.0	-21.0	1.57 V	86	18.4	14.6
7	17865.00	58.5 PK	74.0	-15.5	1.72 V	50	32.6	25.9
8	17865.00	45.8 AV	54.0	-8.2	1.72 V	50	19.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

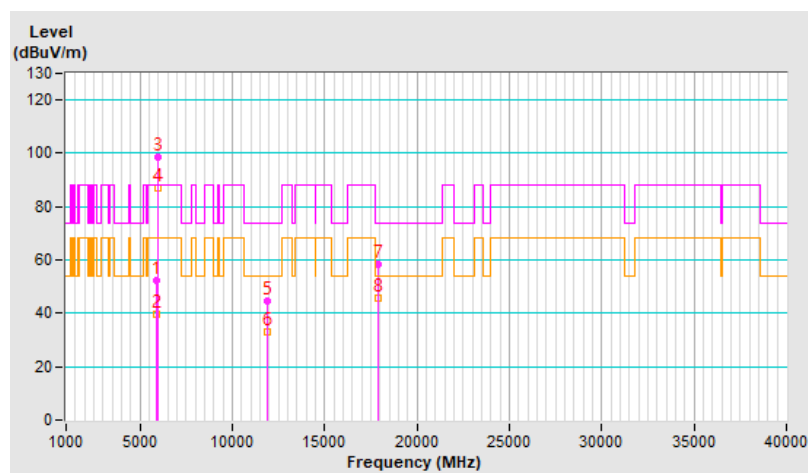


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	85.3 PK			1.06 H	260	79.5	5.8
2	*6195.00	75.5 AV			1.06 H	260	69.7	5.8
3	12390.00	46.8 PK	74.0	-27.2	1.81 H	120	32.1	14.7
4	12390.00	34.2 AV	54.0	-19.8	1.81 H	120	19.5	14.7
5	18585.00	58.5 PK	74.0	-15.5	1.79 H	26	64.0	-5.5
6	18585.00	46.0 AV	54.0	-8.0	1.79 H	26	51.5	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

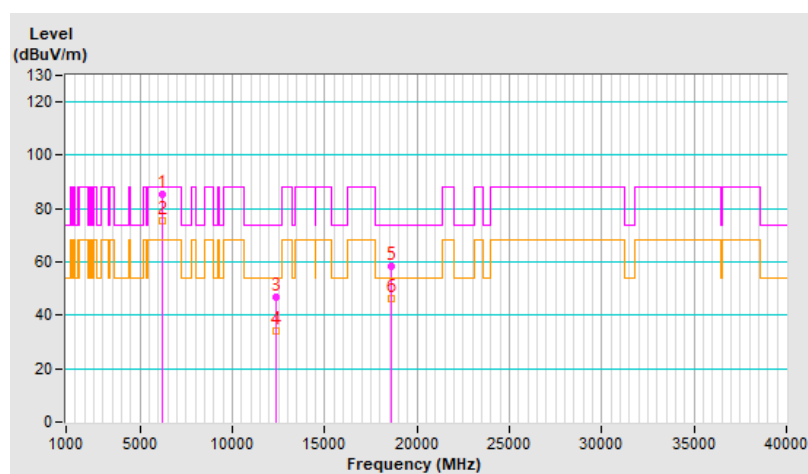


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	98.5 PK			1.35 V	87	92.7	5.8
2	*6195.00	86.8 AV			1.35 V	87	81.0	5.8
3	12390.00	45.5 PK	74.0	-28.5	1.63 V	85	30.8	14.7
4	12390.00	33.3 AV	54.0	-20.7	1.63 V	85	18.6	14.7
5	18585.00	58.5 PK	74.0	-15.5	1.77 V	38	64.0	-5.5
6	18585.00	46.1 AV	54.0	-7.9	1.77 V	38	51.6	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

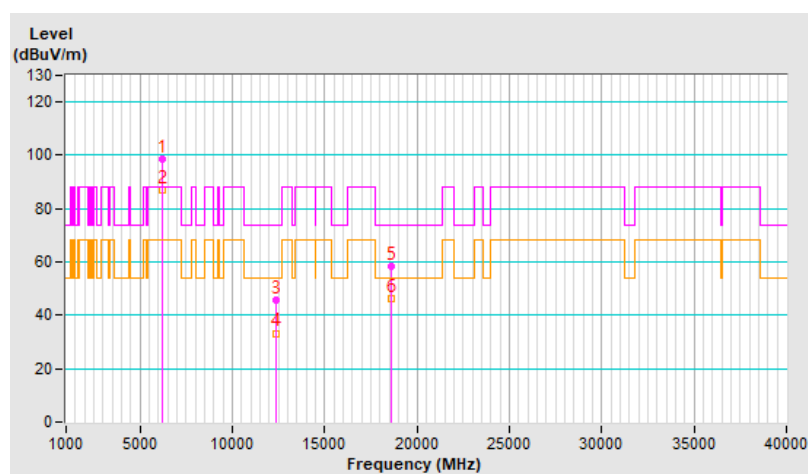


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	85.3 PK			1.00 H	264	78.5	6.8
2	*6415.00	75.7 AV			1.00 H	264	68.9	6.8
3	#12830.00	47.5 PK	88.2	-40.7	1.78 H	124	32.4	15.1
4	#12830.00	35.0 AV	68.2	-33.2	1.78 H	124	19.9	15.1
5	19245.00	57.9 PK	74.0	-16.1	1.80 H	22	62.5	-4.6
6	19245.00	45.2 AV	54.0	-8.8	1.80 H	22	49.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

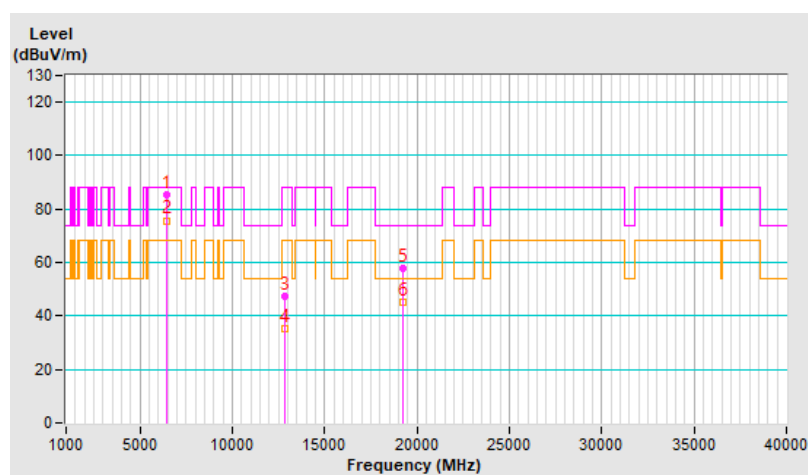


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	98.8 PK			1.31 V	66	92.0	6.8
2	*6415.00	87.1 AV			1.31 V	66	80.3	6.8
3	#12830.00	45.2 PK	88.2	-43.0	1.61 V	81	30.1	15.1
4	#12830.00	33.1 AV	68.2	-35.1	1.61 V	81	18.0	15.1
5	19245.00	58.5 PK	74.0	-15.5	1.69 V	32	63.1	-4.6
6	19245.00	45.8 AV	54.0	-8.2	1.69 V	32	50.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

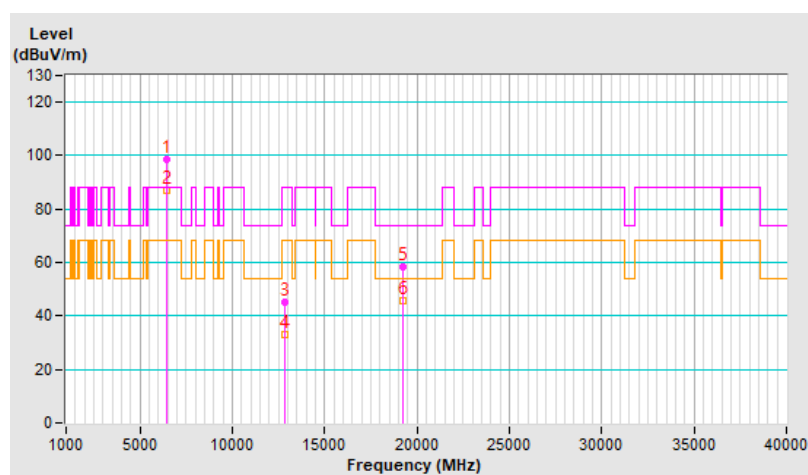


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	84.6 PK			1.00 H	264	77.2	7.4
2	*6535.00	75.4 AV			1.00 H	264	68.0	7.4
3	#13070.00	46.6 PK	88.2	-41.6	1.86 H	132	31.5	15.1
4	#13070.00	34.5 AV	68.2	-33.7	1.86 H	132	19.4	15.1
5	19605.00	58.2 PK	74.0	-15.8	1.72 H	38	63.0	-4.8
6	19605.00	45.7 AV	54.0	-8.3	1.72 H	38	50.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

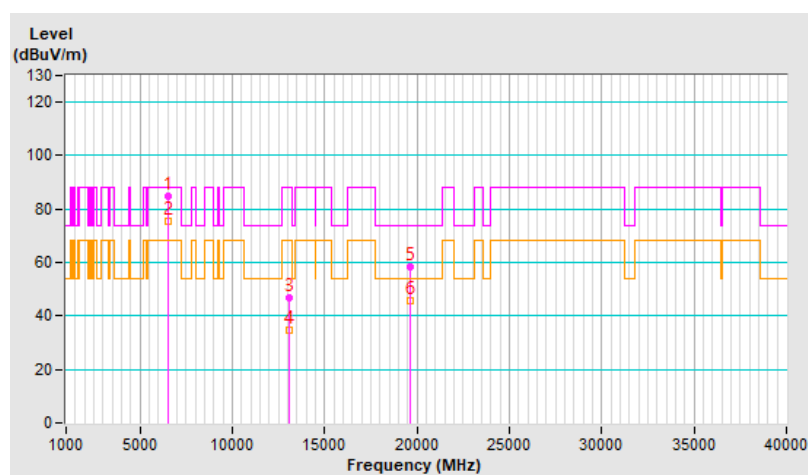


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	98.7 PK			1.36 V	66	91.3	7.4
2	*6535.00	87.1 AV			1.36 V	66	79.7	7.4
3	#13070.00	45.0 PK	88.2	-43.2	1.56 V	91	29.9	15.1
4	#13070.00	33.3 AV	68.2	-34.9	1.56 V	91	18.2	15.1
5	19605.00	59.1 PK	74.0	-14.9	1.79 V	38	63.9	-4.8
6	19605.00	46.6 AV	54.0	-7.4	1.79 V	38	51.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

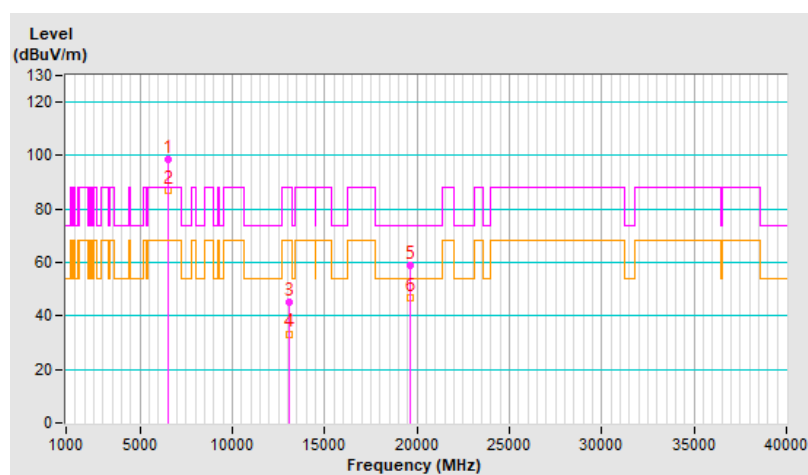


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	84.7 PK			1.00 H	260	77.0	7.7
2	*6695.00	75.4 AV			1.00 H	260	67.7	7.7
3	13390.00	46.8 PK	74.0	-27.2	1.78 H	121	31.4	15.4
4	13390.00	34.7 AV	54.0	-19.3	1.78 H	121	19.3	15.4
5	20085.00	58.3 PK	74.0	-15.7	1.77 H	34	62.6	-4.3
6	20085.00	45.8 AV	54.0	-8.2	1.77 H	34	50.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

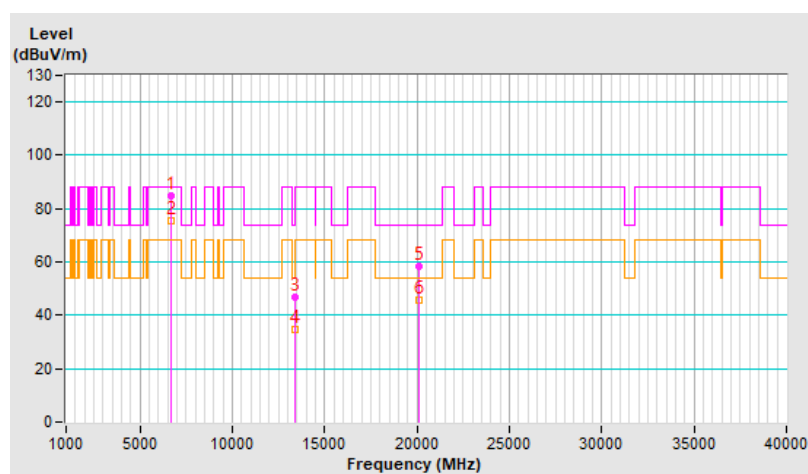


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	98.6 PK			1.33 V	74	90.9	7.7
2	*6695.00	86.7 AV			1.33 V	74	79.0	7.7
3	13390.00	45.0 PK	74.0	-29.0	1.56 V	89	29.6	15.4
4	13390.00	33.1 AV	54.0	-20.9	1.56 V	89	17.7	15.4
5	20085.00	58.8 PK	74.0	-15.2	1.74 V	25	63.1	-4.3
6	20085.00	46.3 AV	54.0	-7.7	1.74 V	25	50.6	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

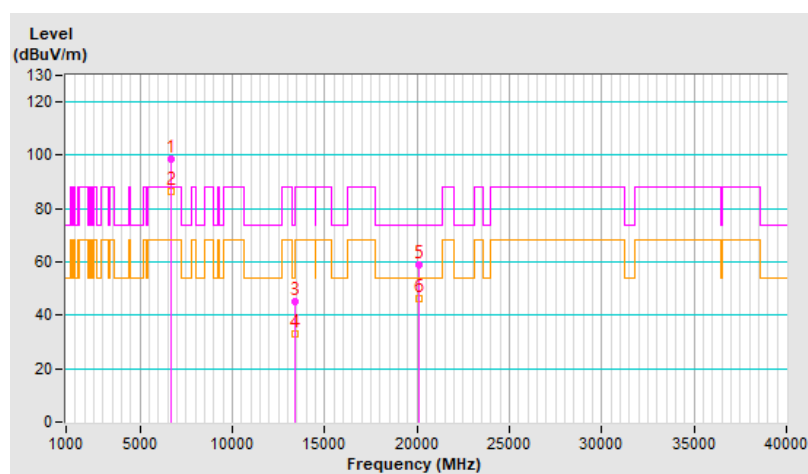


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	85.2 PK			3.07 H	130	77.0	8.2
2	*6855.00	73.4 AV			3.07 H	130	65.2	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.77 H	130	30.7	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.77 H	130	18.3	16.3
5	20565.00	58.5 PK	74.0	-15.5	1.83 H	44	62.2	-3.7
6	20565.00	45.8 AV	54.0	-8.2	1.83 H	44	49.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

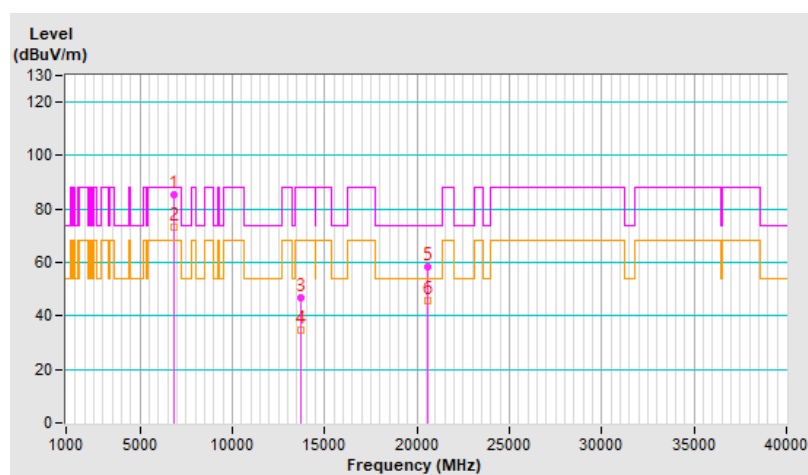


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	100.4 PK			1.71 V	84	92.2	8.2
2	*6855.00	86.8 AV			1.71 V	84	78.6	8.2
3	#13710.00	45.2 PK	88.2	-43.0	1.65 V	98	28.9	16.3
4	#13710.00	33.4 AV	68.2	-34.8	1.65 V	98	17.1	16.3
5	20565.00	59.0 PK	74.0	-15.0	1.69 V	49	62.7	-3.7
6	20565.00	46.2 AV	54.0	-7.8	1.69 V	49	49.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

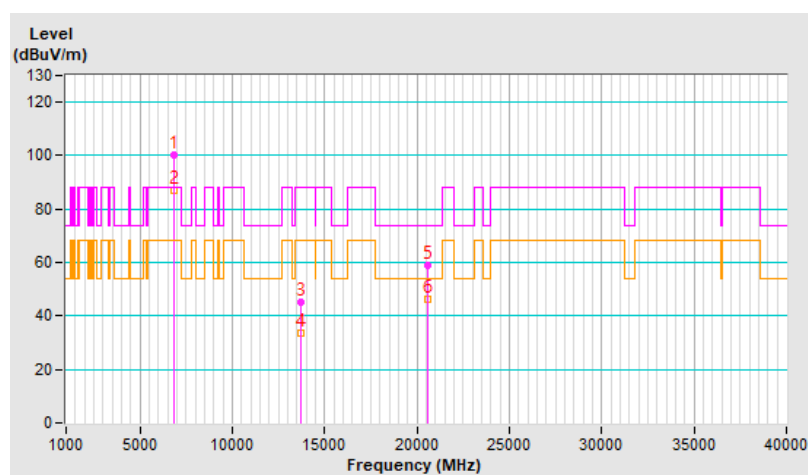


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	1.05 H	249	46.4	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.05 H	249	34.1	5.6
3	*5955.00	85.3 PK			1.05 H	249	79.8	5.5
4	*5955.00	74.5 AV			1.05 H	249	69.0	5.5
5	11910.00	46.6 PK	74.0	-27.4	1.83 H	134	32.0	14.6
6	11910.00	34.1 AV	54.0	-19.9	1.83 H	134	19.5	14.6
7	17865.00	58.2 PK	74.0	-15.8	1.77 H	14	32.3	25.9
8	17865.00	45.5 AV	54.0	-8.5	1.77 H	14	19.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

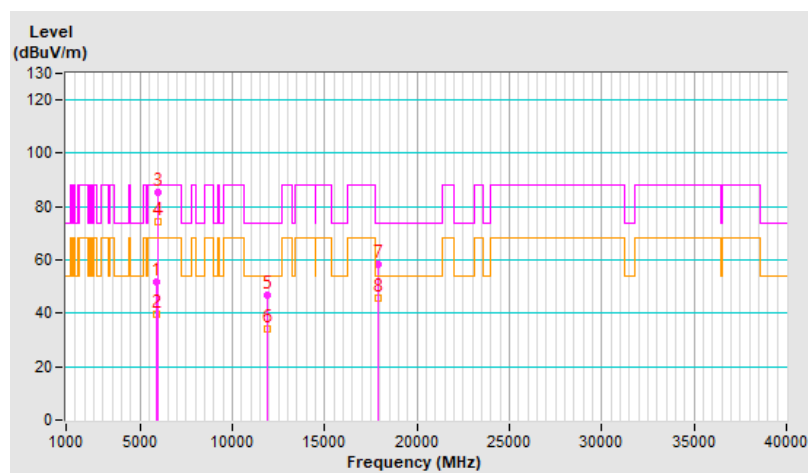


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.35 V	79	45.2	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.35 V	79	34.2	5.6
3	*5955.00	96.4 PK			1.35 V	79	90.9	5.5
4	*5955.00	86.2 AV			1.35 V	79	80.7	5.5
5	11910.00	45.0 PK	74.0	-29.0	1.55 V	90	30.4	14.6
6	11910.00	33.4 AV	54.0	-20.6	1.55 V	90	18.8	14.6
7	17865.00	58.6 PK	74.0	-15.4	1.73 V	30	32.7	25.9
8	17865.00	45.8 AV	54.0	-8.2	1.73 V	30	19.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

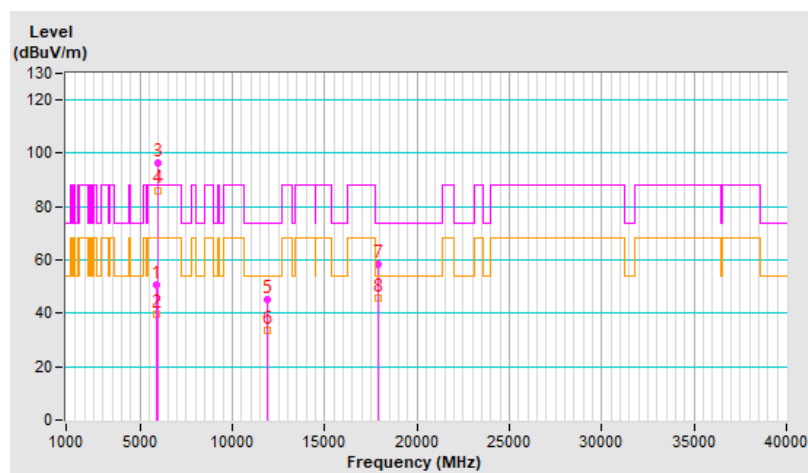


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	84.8 PK			1.03 H	239	78.0	6.8
2	*6415.00	74.1 AV			1.03 H	239	67.3	6.8
3	#12830.00	47.2 PK	88.2	-41.0	1.85 H	121	32.1	15.1
4	#12830.00	34.6 AV	68.2	-33.6	1.85 H	121	19.5	15.1
5	19245.00	57.8 PK	74.0	-16.2	1.75 H	30	62.4	-4.6
6	19245.00	45.3 AV	54.0	-8.7	1.75 H	30	49.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

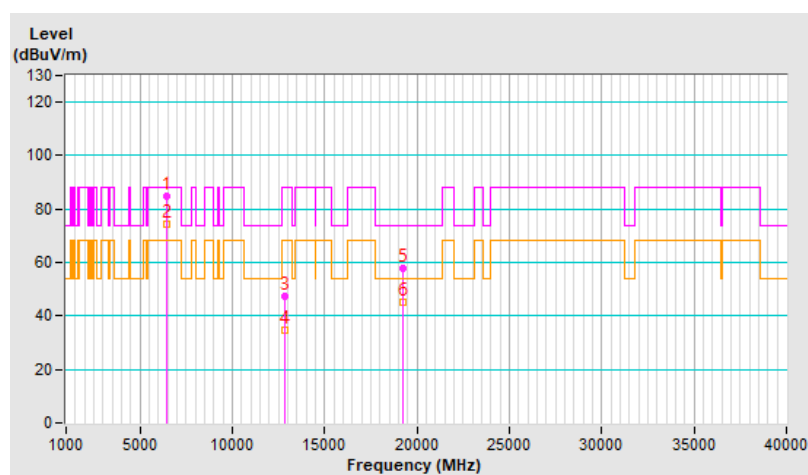


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	95.8 PK			1.36 V	79	89.0	6.8
2	*6415.00	85.9 AV			1.36 V	79	79.1	6.8
3	#12830.00	45.3 PK	88.2	-42.9	1.58 V	83	30.2	15.1
4	#12830.00	33.5 AV	68.2	-34.7	1.58 V	83	18.4	15.1
5	19245.00	58.9 PK	74.0	-15.1	1.78 V	39	63.5	-4.6
6	19245.00	46.0 AV	54.0	-8.0	1.78 V	39	50.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

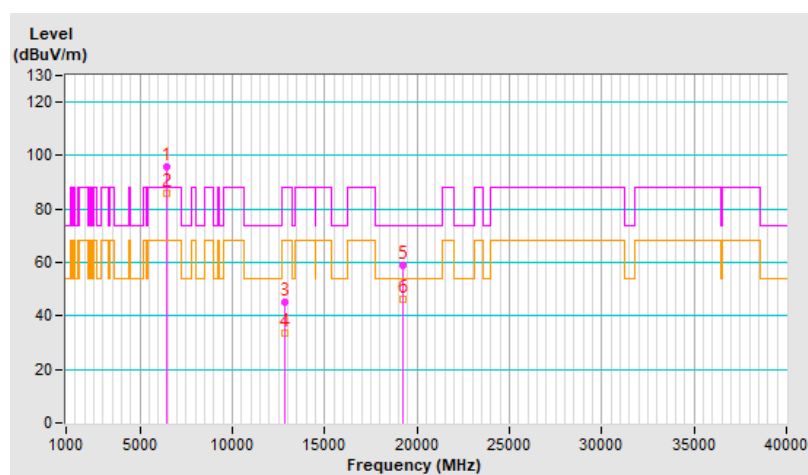


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	85.4 PK			1.01 H	260	78.0	7.4
2	*6535.00	74.3 AV			1.01 H	260	66.9	7.4
3	#13070.00	47.2 PK	88.2	-41.0	1.85 H	110	32.1	15.1
4	#13070.00	34.8 AV	68.2	-33.4	1.85 H	110	19.7	15.1
5	19605.00	58.4 PK	74.0	-15.6	1.81 H	40	63.2	-4.8
6	19605.00	45.6 AV	54.0	-8.4	1.81 H	40	50.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

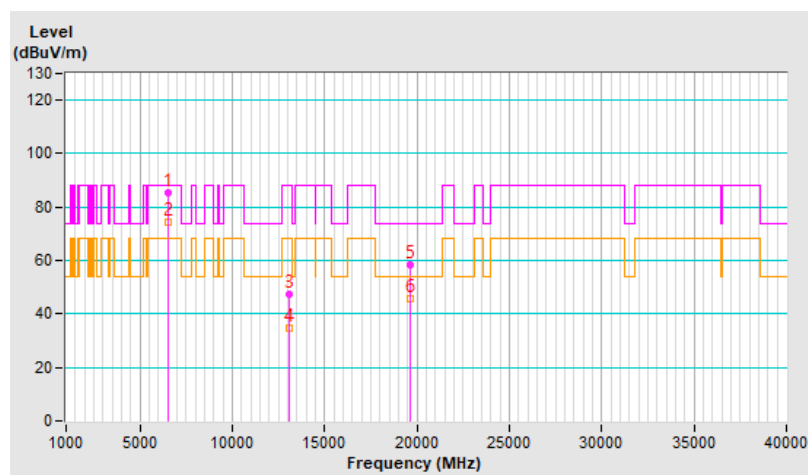


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	96.4 PK			1.37 V	69	89.0	7.4
2	*6535.00	85.9 AV			1.37 V	69	78.5	7.4
3	#13070.00	44.5 PK	88.2	-43.7	1.56 V	101	29.4	15.1
4	#13070.00	32.9 AV	68.2	-35.3	1.56 V	101	17.8	15.1
5	19605.00	58.6 PK	74.0	-15.4	1.74 V	37	63.4	-4.8
6	19605.00	46.0 AV	54.0	-8.0	1.74 V	37	50.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

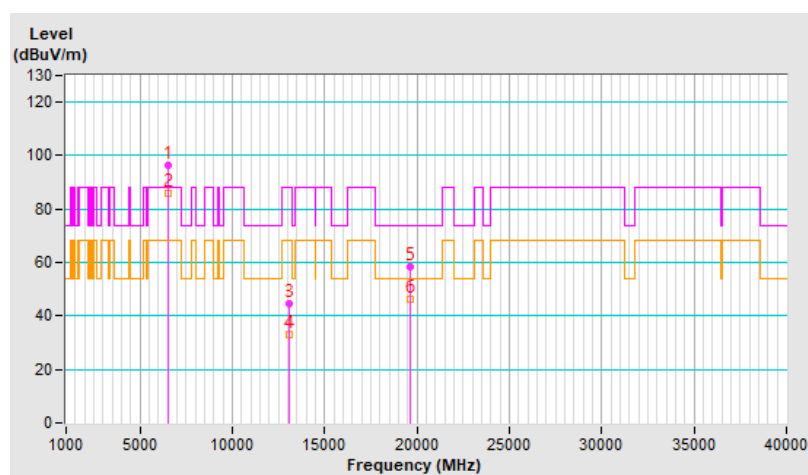


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	81.4 PK			1.50 H	34	73.2	8.2
2	*6855.00	70.2 AV			1.50 H	34	62.0	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.85 H	121	30.7	16.3
4	#13710.00	34.7 AV	68.2	-33.5	1.85 H	121	18.4	16.3
5	20565.00	58.7 PK	74.0	-15.3	1.79 H	39	62.4	-3.7
6	20565.00	46.0 AV	54.0	-8.0	1.79 H	39	49.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

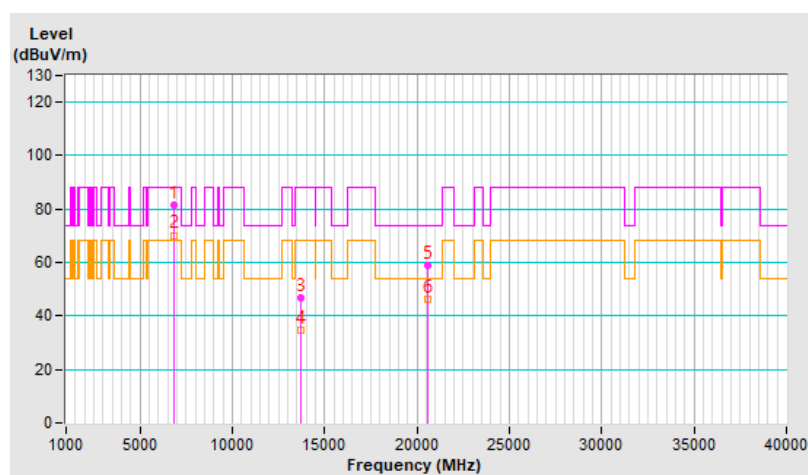


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	96.6 PK			1.60 V	82	88.4	8.2
2	*6855.00	87.5 AV			1.60 V	82	79.3	8.2
3	#13710.00	45.3 PK	88.2	-42.9	1.62 V	100	29.0	16.3
4	#13710.00	33.4 AV	68.2	-34.8	1.62 V	100	17.1	16.3
5	20565.00	58.8 PK	74.0	-15.2	1.71 V	26	62.5	-3.7
6	20565.00	46.0 AV	54.0	-8.0	1.71 V	26	49.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

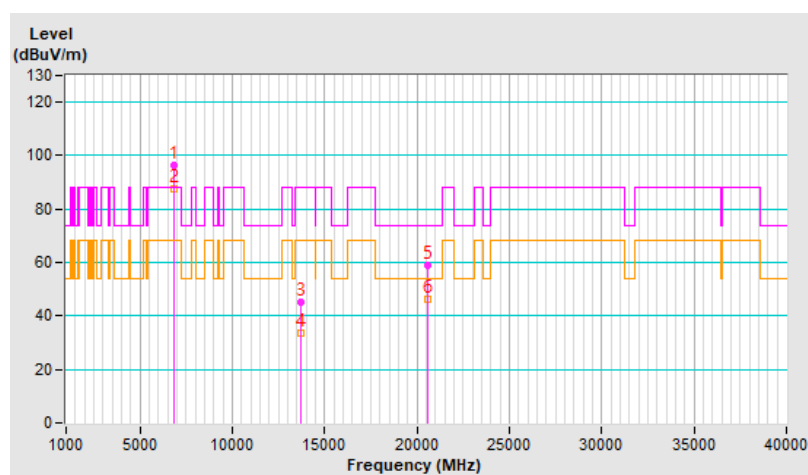


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	1.53 H	20	46.2	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.53 H	20	34.1	5.6
3	*5955.00	82.2 PK			1.53 H	20	76.7	5.5
4	*5955.00	71.6 AV			1.53 H	20	66.1	5.5
5	11910.00	47.2 PK	74.0	-26.8	1.77 H	129	32.6	14.6
6	11910.00	34.9 AV	54.0	-19.1	1.77 H	129	20.3	14.6
7	17865.00	58.3 PK	74.0	-15.7	1.71 H	23	32.4	25.9
8	17865.00	45.6 AV	54.0	-8.4	1.71 H	23	19.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

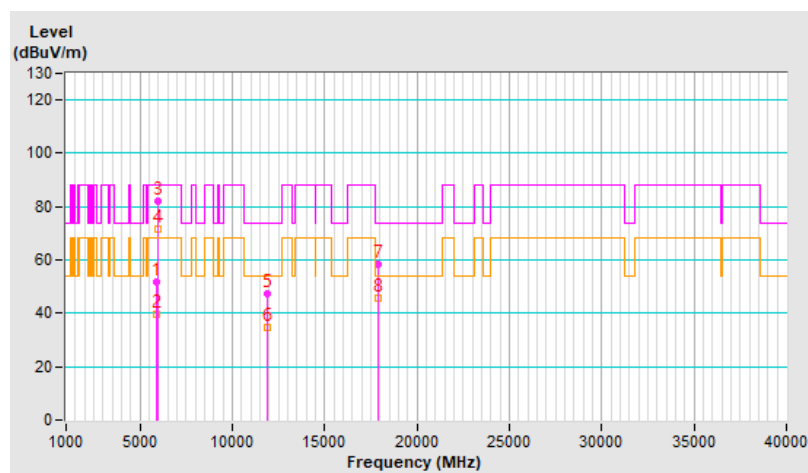


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.3 PK	88.2	-35.9	1.71 V	90	46.7	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.71 V	90	34.1	5.6
3	*5955.00	97.5 PK			1.71 V	90	92.0	5.5
4	*5955.00	86.8 AV			1.71 V	90	81.3	5.5
5	11910.00	45.3 PK	74.0	-28.7	1.66 V	80	30.7	14.6
6	11910.00	33.5 AV	54.0	-20.5	1.66 V	80	18.9	14.6
7	17865.00	58.7 PK	74.0	-15.3	1.80 V	24	32.8	25.9
8	17865.00	46.1 AV	54.0	-7.9	1.80 V	24	20.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

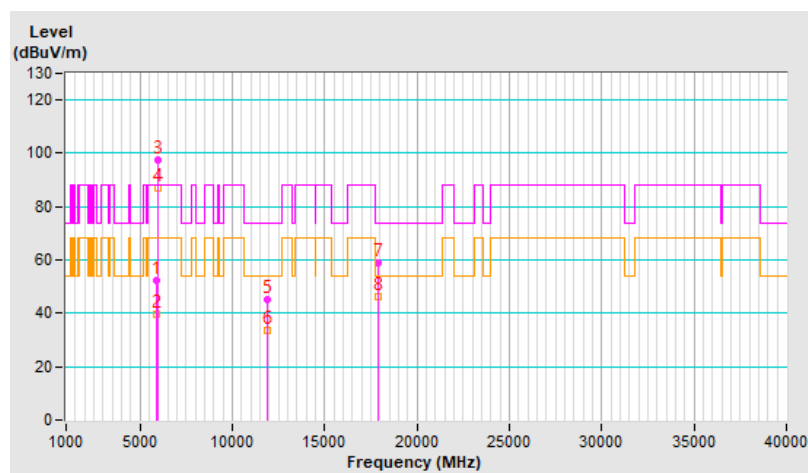


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	82.2 PK			1.56 H	21	75.4	6.8
2	*6415.00	71.8 AV			1.56 H	21	65.0	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.84 H	136	31.4	15.1
4	#12830.00	34.2 AV	68.2	-34.0	1.84 H	136	19.1	15.1
5	19245.00	58.1 PK	74.0	-15.9	1.76 H	19	62.7	-4.6
6	19245.00	45.6 AV	54.0	-8.4	1.76 H	19	50.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

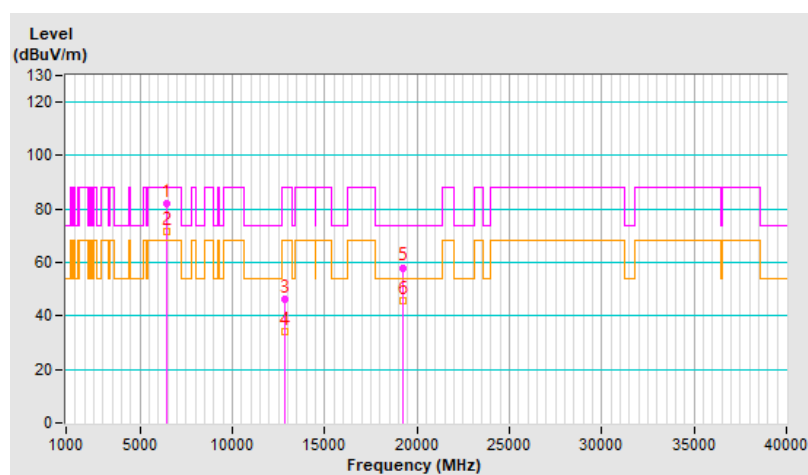


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	97.1 PK			1.71 V	93	90.3	6.8
2	*6415.00	86.4 AV			1.71 V	93	79.6	6.8
3	#12830.00	45.6 PK	88.2	-42.6	1.63 V	101	30.5	15.1
4	#12830.00	33.6 AV	68.2	-34.6	1.63 V	101	18.5	15.1
5	19245.00	59.0 PK	74.0	-15.0	1.68 V	29	63.6	-4.6
6	19245.00	46.4 AV	54.0	-7.6	1.68 V	29	51.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

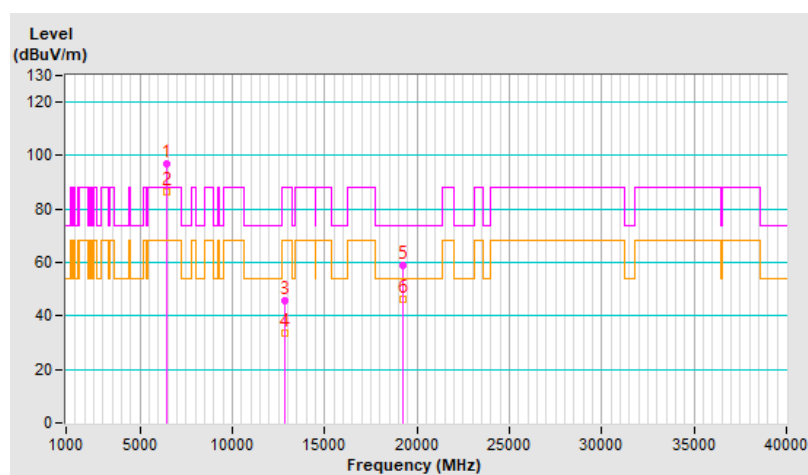


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	82.4 PK			1.52 H	30	75.0	7.4
2	*6535.00	71.8 AV			1.52 H	30	64.4	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.85 H	111	31.9	15.1
4	#13070.00	34.6 AV	68.2	-33.6	1.85 H	111	19.5	15.1
5	19605.00	58.0 PK	74.0	-16.0	1.78 H	31	62.8	-4.8
6	19605.00	45.4 AV	54.0	-8.6	1.78 H	31	50.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

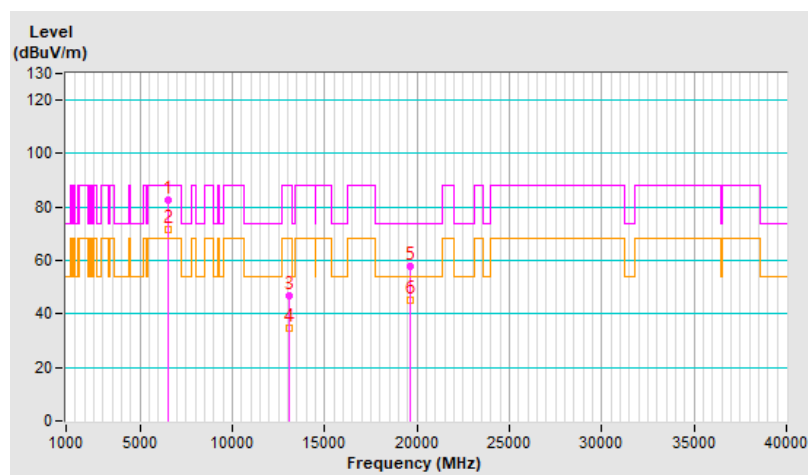


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.3 PK			1.66 V	96	89.9	7.4
2	*6535.00	86.9 AV			1.66 V	96	79.5	7.4
3	#13070.00	45.6 PK	88.2	-42.6	1.61 V	70	30.5	15.1
4	#13070.00	33.5 AV	68.2	-34.7	1.61 V	70	18.4	15.1
5	19605.00	59.2 PK	74.0	-14.8	1.77 V	52	64.0	-4.8
6	19605.00	46.5 AV	54.0	-7.5	1.77 V	52	51.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

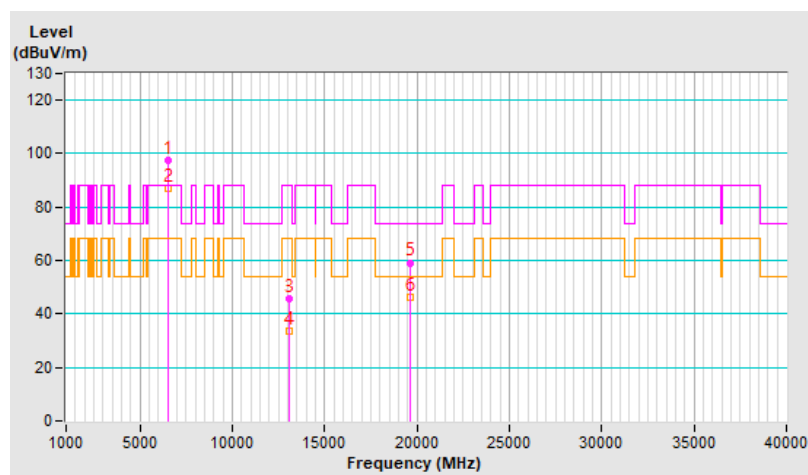


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	82.2 PK			1.50 H	35	74.0	8.2
2	*6855.00	71.6 AV			1.50 H	35	63.4	8.2
3	#13710.00	46.4 PK	88.2	-41.8	1.84 H	114	30.1	16.3
4	#13710.00	34.2 AV	68.2	-34.0	1.84 H	114	17.9	16.3
5	20565.00	58.1 PK	74.0	-15.9	1.76 H	29	61.8	-3.7
6	20565.00	45.5 AV	54.0	-8.5	1.76 H	29	49.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

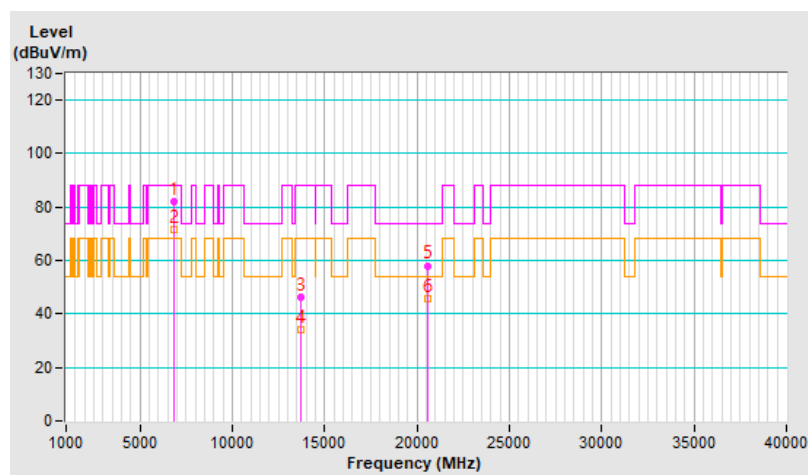


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.2 PK			1.71 V	84	89.0	8.2
2	*6855.00	87.0 AV			1.71 V	84	78.8	8.2
3	#13710.00	45.0 PK	88.2	-43.2	1.60 V	75	28.7	16.3
4	#13710.00	33.3 AV	68.2	-34.9	1.60 V	75	17.0	16.3
5	20565.00	59.0 PK	74.0	-15.0	1.77 V	32	62.7	-3.7
6	20565.00	46.1 AV	54.0	-7.9	1.77 V	32	49.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

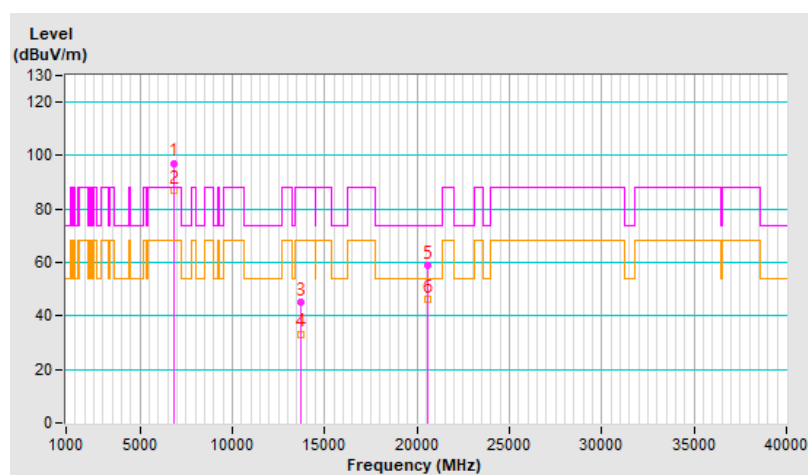


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	2.56 H	314	46.3	5.6
2	#5925.00	39.8 AV	68.2	-28.4	2.56 H	314	34.2	5.6
3	*5985.00	83.2 PK			2.56 H	314	77.7	5.5
4	*5985.00	71.9 AV			2.56 H	314	66.4	5.5
5	11970.00	46.7 PK	74.0	-27.3	1.79 H	121	32.2	14.5
6	11970.00	34.3 AV	54.0	-19.7	1.79 H	121	19.8	14.5
7	17955.00	59.0 PK	74.0	-15.0	1.71 H	45	30.7	28.3
8	17955.00	46.1 AV	54.0	-7.9	1.71 H	45	17.8	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

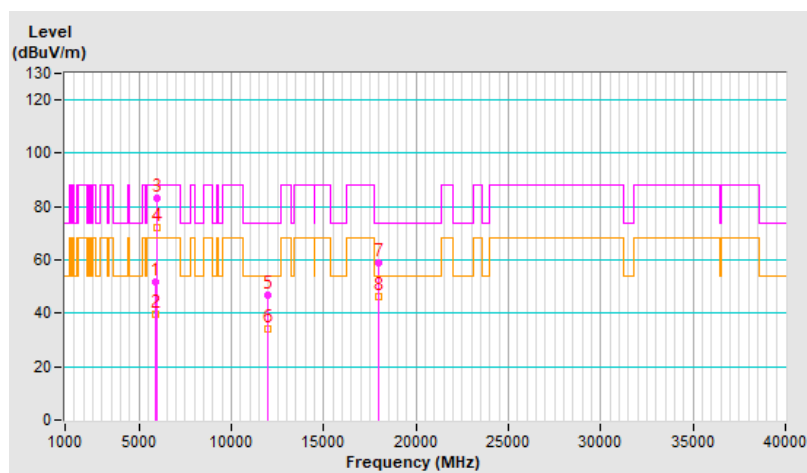


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.0 PK	88.2	-36.2	1.66 V	79	46.4	5.6
2	#5925.00	40.2 AV	68.2	-28.0	1.66 V	79	34.6	5.6
3	*5985.00	96.7 PK			1.66 V	79	91.2	5.5
4	*5985.00	86.4 AV			1.66 V	79	80.9	5.5
5	11970.00	45.3 PK	74.0	-28.7	1.63 V	94	30.8	14.5
6	11970.00	33.4 AV	54.0	-20.6	1.63 V	94	18.9	14.5
7	17955.00	59.1 PK	74.0	-14.9	1.75 V	26	30.8	28.3
8	17955.00	46.3 AV	54.0	-7.7	1.75 V	26	18.0	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

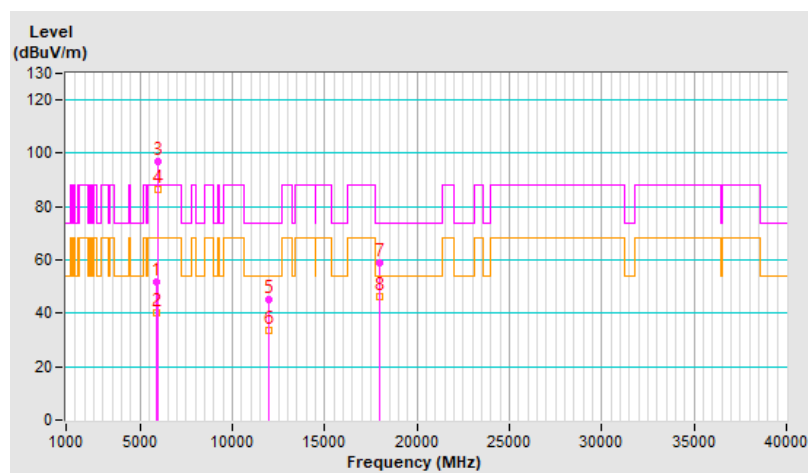


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	82.8 PK			2.53 H	328	76.2	6.6
2	*6385.00	71.4 AV			2.53 H	328	64.8	6.6
3	#12770.00	46.4 PK	88.2	-41.8	1.78 H	127	31.5	14.9
4	#12770.00	34.1 AV	68.2	-34.1	1.78 H	127	19.2	14.9
5	19155.00	57.8 PK	74.0	-16.2	1.80 H	27	62.5	-4.7
6	19155.00	45.3 AV	54.0	-8.7	1.80 H	27	50.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

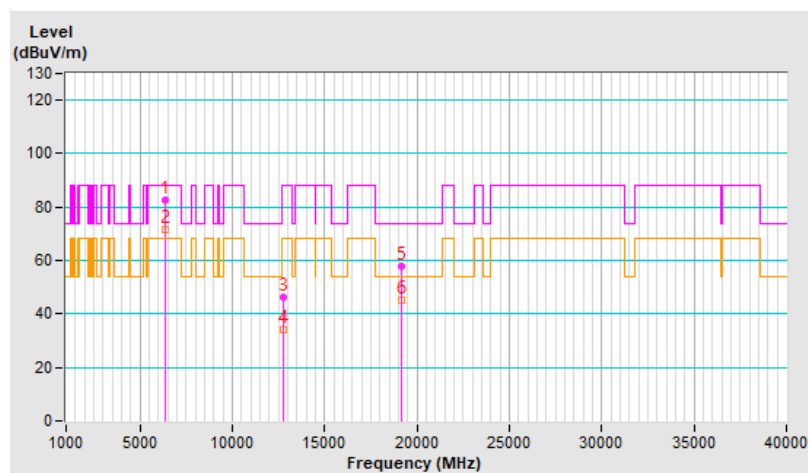


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	96.6 PK			1.67 V	89	90.0	6.6
2	*6385.00	86.4 AV			1.67 V	89	79.8	6.6
3	#12770.00	44.8 PK	88.2	-43.4	1.58 V	90	29.9	14.9
4	#12770.00	32.8 AV	68.2	-35.4	1.58 V	90	17.9	14.9
5	19155.00	58.8 PK	74.0	-15.2	1.71 V	54	63.5	-4.7
6	19155.00	46.2 AV	54.0	-7.8	1.71 V	54	50.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

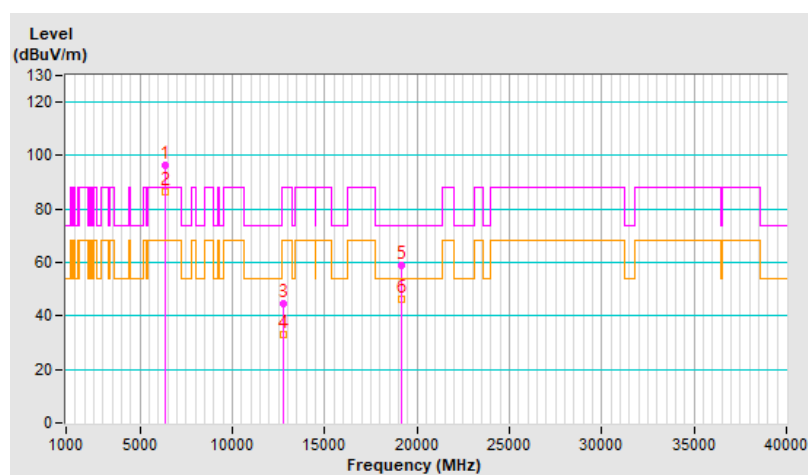


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	83.1 PK			2.59 H	311	75.3	7.8
2	*6625.00	71.8 AV			2.59 H	311	64.0	7.8
3	13250.00	46.6 PK	74.0	-27.4	1.79 H	105	31.2	15.4
4	13250.00	34.5 AV	54.0	-19.5	1.79 H	105	19.1	15.4
5	19875.00	58.3 PK	74.0	-15.7	1.78 H	28	62.8	-4.5
6	19875.00	45.8 AV	54.0	-8.2	1.78 H	28	50.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

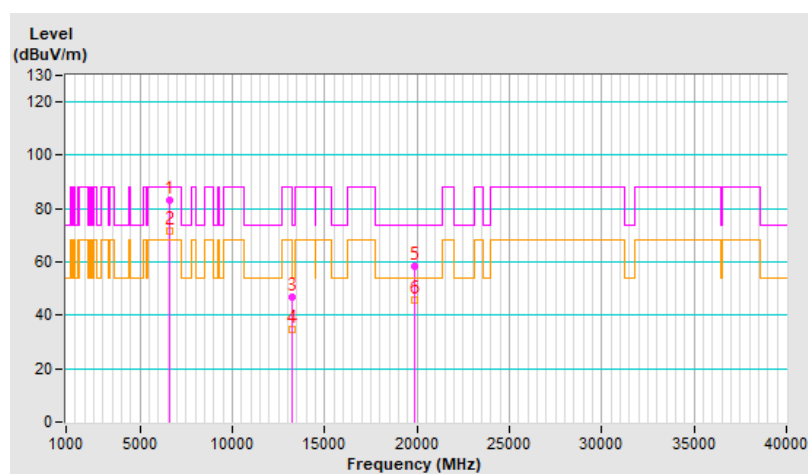


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	96.8 PK			1.63 V	79	89.0	7.8
2	*6625.00	86.6 AV			1.63 V	79	78.8	7.8
3	13250.00	45.3 PK	74.0	-28.7	1.55 V	93	29.9	15.4
4	13250.00	33.2 AV	54.0	-20.8	1.55 V	93	17.8	15.4
5	19875.00	58.7 PK	74.0	-15.3	1.73 V	26	63.2	-4.5
6	19875.00	46.0 AV	54.0	-8.0	1.73 V	26	50.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

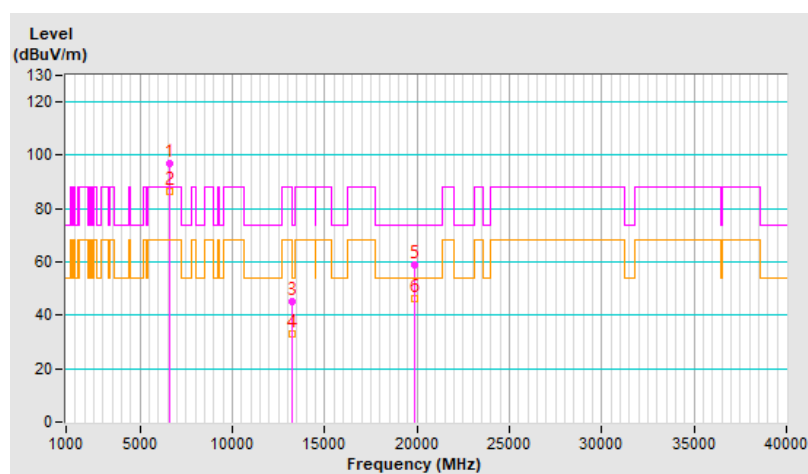


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	84.2 PK			1.12 H	272	76.5	7.7
2	*6785.00	73.4 AV			1.12 H	272	65.7	7.7
3	#13570.00	46.8 PK	88.2	-41.4	1.85 H	105	31.1	15.7
4	#13570.00	34.3 AV	68.2	-33.9	1.85 H	105	18.6	15.7
5	20355.00	58.9 PK	74.0	-15.1	1.78 H	19	62.7	-3.8
6	20355.00	46.0 AV	54.0	-8.0	1.78 H	19	49.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

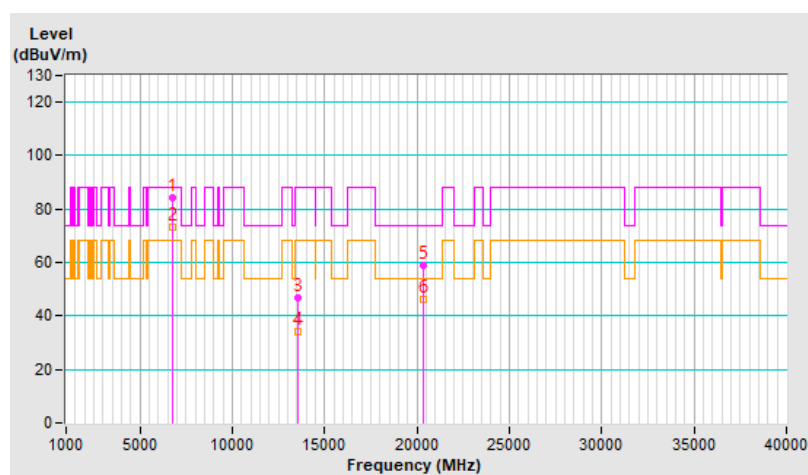


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	99.0 PK			1.39 V	80	91.3	7.7
2	*6785.00	87.4 AV			1.39 V	80	79.7	7.7
3	#13570.00	45.8 PK	88.2	-42.4	1.57 V	74	30.1	15.7
4	#13570.00	33.6 AV	68.2	-34.6	1.57 V	74	17.9	15.7
5	20355.00	59.5 PK	74.0	-14.5	1.74 V	48	63.3	-3.8
6	20355.00	46.6 AV	54.0	-7.4	1.74 V	48	50.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

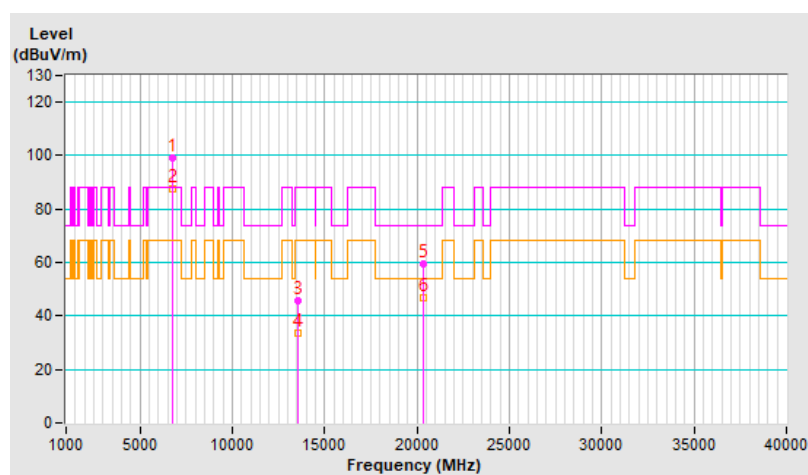


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.51 H	20	45.9	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.51 H	20	34.1	5.6
3	*6025.00	80.6 PK			1.51 H	20	75.0	5.6
4	*6025.00	69.9 AV			1.51 H	20	64.3	5.6
5	12050.00	46.9 PK	74.0	-27.1	1.78 H	137	32.3	14.6
6	12050.00	34.7 AV	54.0	-19.3	1.78 H	137	20.1	14.6
7	18075.00	58.6 PK	74.0	-15.4	1.79 H	40	63.9	-5.3
8	18075.00	45.7 AV	54.0	-8.3	1.79 H	40	51.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

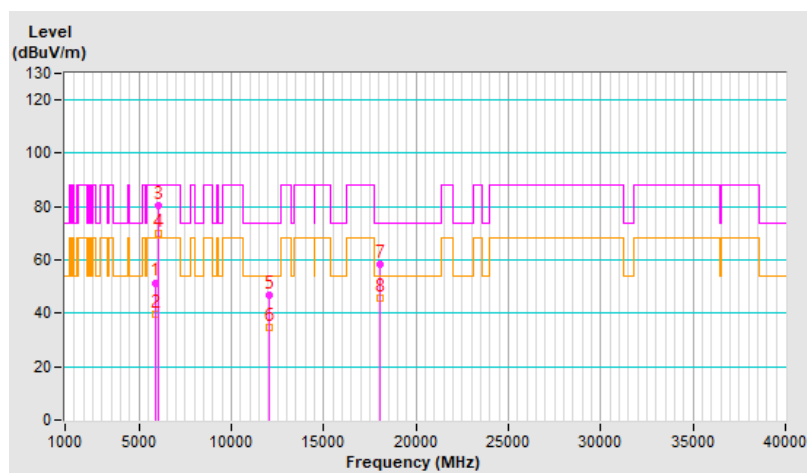


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.8 PK	88.2	-30.4	1.26 V	79	52.2	5.6
2	#5925.00	43.7 AV	68.2	-24.5	1.26 V	79	38.1	5.6
3	*6025.00	98.0 PK			1.26 V	79	92.4	5.6
4	*6025.00	86.7 AV			1.26 V	79	81.1	5.6
5	12050.00	44.6 PK	74.0	-29.4	1.61 V	98	30.0	14.6
6	12050.00	32.6 AV	54.0	-21.4	1.61 V	98	18.0	14.6
7	18075.00	58.3 PK	74.0	-15.7	1.76 V	41	63.6	-5.3
8	18075.00	45.8 AV	54.0	-8.2	1.76 V	41	51.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

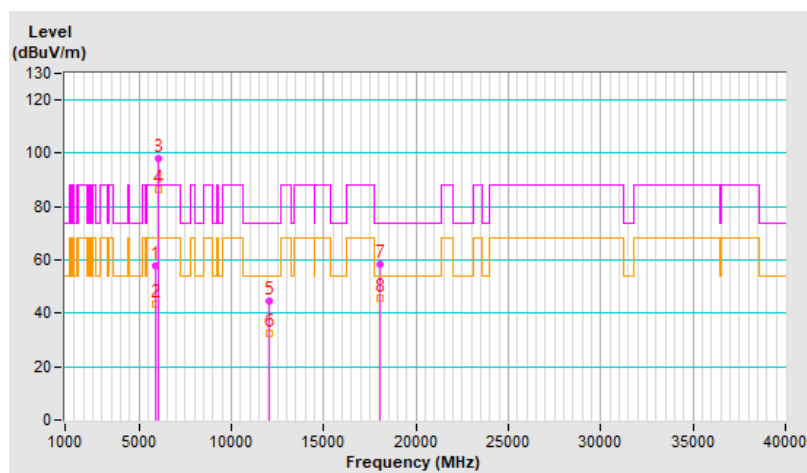


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	80.2 PK			1.45 H	10	73.8	6.4
2	*6345.00	69.4 AV			1.45 H	10	63.0	6.4
3	12690.00	46.5 PK	74.0	-27.5	1.79 H	128	31.6	14.9
4	12690.00	34.4 AV	54.0	-19.6	1.79 H	128	19.5	14.9
5	19035.00	58.1 PK	74.0	-15.9	1.73 H	14	63.0	-4.9
6	19035.00	45.3 AV	54.0	-8.7	1.73 H	14	50.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

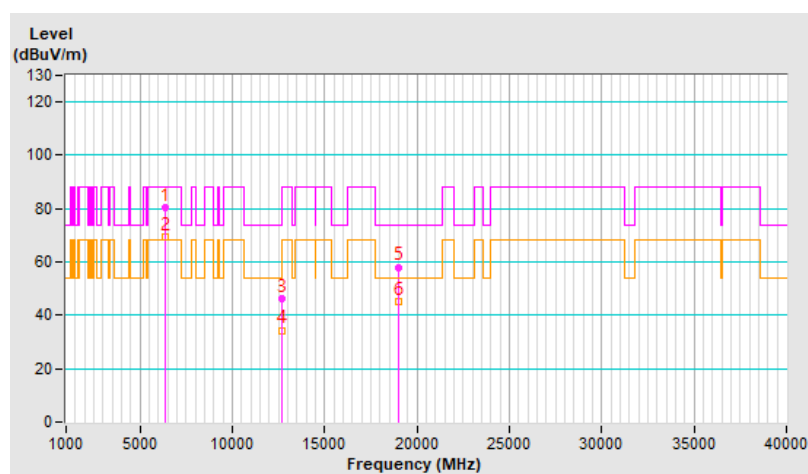


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	97.7 PK			1.23 V	73	91.3	6.4
2	*6345.00	86.5 AV			1.23 V	73	80.1	6.4
3	12690.00	45.2 PK	74.0	-28.8	1.56 V	85	30.3	14.9
4	12690.00	33.3 AV	54.0	-20.7	1.56 V	85	18.4	14.9
5	19035.00	59.0 PK	74.0	-15.0	1.75 V	51	63.9	-4.9
6	19035.00	46.0 AV	54.0	-8.0	1.75 V	51	50.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

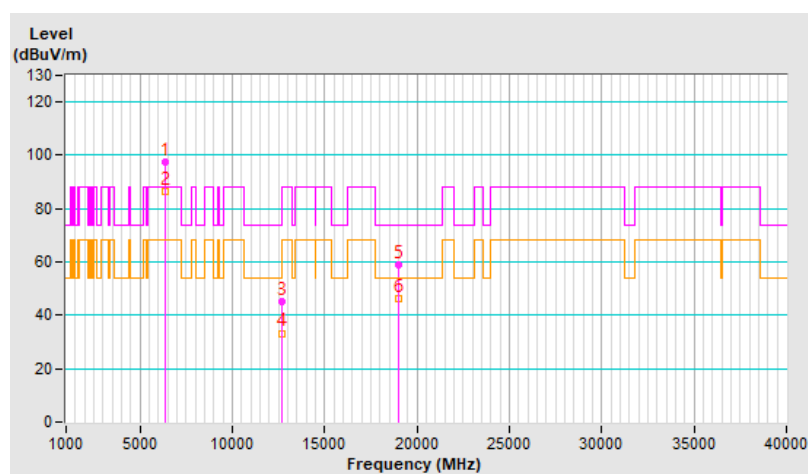


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	87.6 PK			3.22 H	131	79.8	7.8
2	*6665.00	75.6 AV			3.22 H	131	67.8	7.8
3	13330.00	47.0 PK	74.0	-27.0	1.80 H	108	31.7	15.3
4	13330.00	34.9 AV	54.0	-19.1	1.80 H	108	19.6	15.3
5	19995.00	58.7 PK	74.0	-15.3	1.81 H	15	63.1	-4.4
6	19995.00	45.8 AV	54.0	-8.2	1.81 H	15	50.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

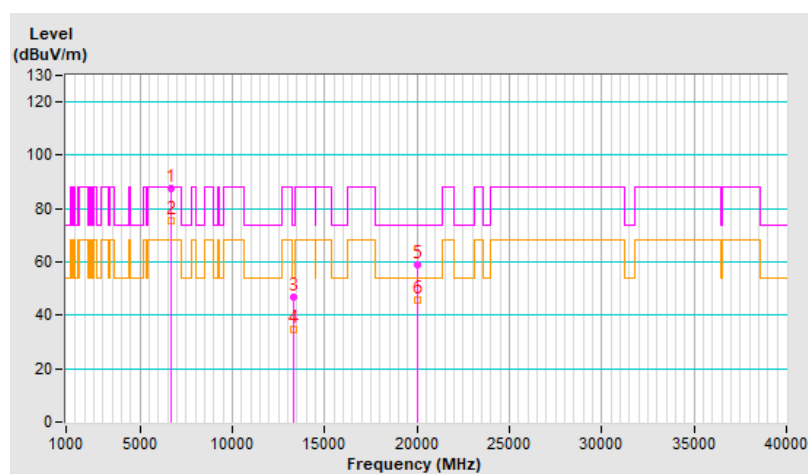


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	99.2 PK			1.84 V	83	91.4	7.8
2	*6665.00	87.1 AV			1.84 V	83	79.3	7.8
3	13330.00	44.7 PK	74.0	-29.3	1.60 V	84	29.4	15.3
4	13330.00	32.8 AV	54.0	-21.2	1.60 V	84	17.5	15.3
5	19995.00	58.7 PK	74.0	-15.3	1.73 V	50	63.1	-4.4
6	19995.00	46.0 AV	54.0	-8.0	1.73 V	50	50.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

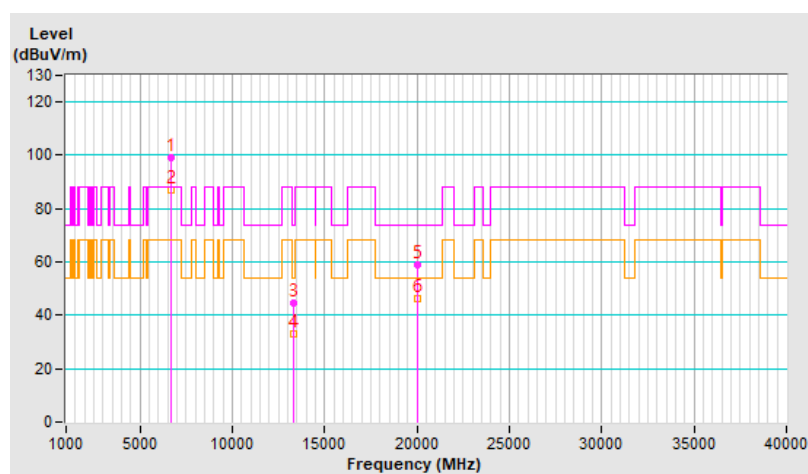


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.52 H	20	46.3	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.52 H	20	34.1	5.6
3	*6025.00	81.2 PK			1.52 H	20	75.6	5.6
4	*6025.00	70.3 AV			1.52 H	20	64.7	5.6
5	12050.00	47.2 PK	74.0	-26.8	1.81 H	111	32.6	14.6
6	12050.00	34.6 AV	54.0	-19.4	1.81 H	111	20.0	14.6
7	18075.00	58.8 PK	74.0	-15.2	1.76 H	18	64.1	-5.3
8	18075.00	46.0 AV	54.0	-8.0	1.76 H	18	51.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

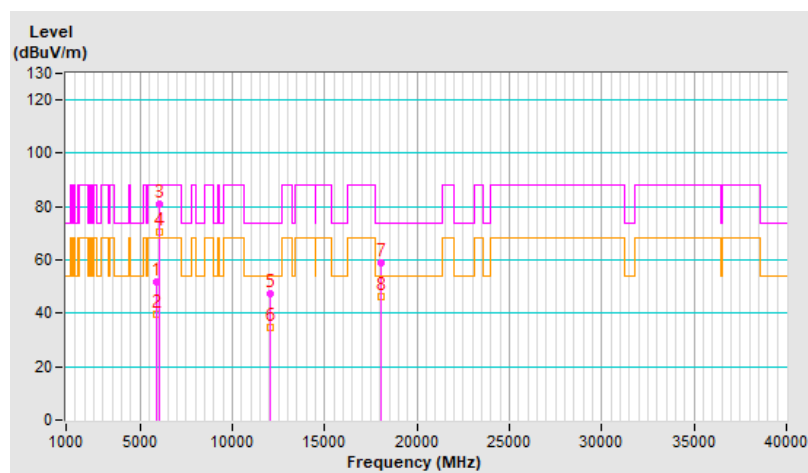


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.7 PK	88.2	-31.5	1.76 V	91	51.1	5.6
2	#5925.00	43.5 AV	68.2	-24.7	1.76 V	91	37.9	5.6
3	*6025.00	98.6 PK			1.76 V	91	93.0	5.6
4	*6025.00	86.9 AV			1.76 V	91	81.3	5.6
5	12050.00	45.1 PK	74.0	-28.9	1.64 V	92	30.5	14.6
6	12050.00	33.3 AV	54.0	-20.7	1.64 V	92	18.7	14.6
7	18075.00	59.1 PK	74.0	-14.9	1.78 V	29	64.4	-5.3
8	18075.00	46.5 AV	54.0	-7.5	1.78 V	29	51.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

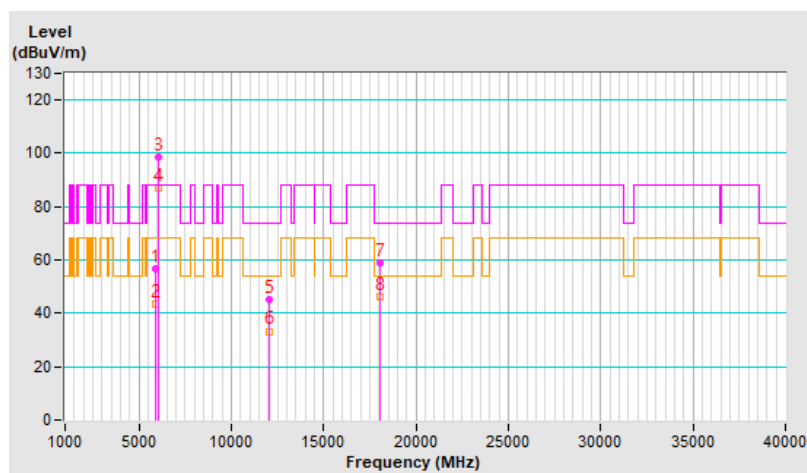


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	81.4 PK			1.47 H	31	75.0	6.4
2	*6345.00	70.3 AV			1.47 H	31	63.9	6.4
3	12690.00	46.8 PK	74.0	-27.2	1.79 H	110	31.9	14.9
4	12690.00	34.3 AV	54.0	-19.7	1.79 H	110	19.4	14.9
5	19035.00	58.4 PK	74.0	-15.6	1.80 H	37	63.3	-4.9
6	19035.00	45.8 AV	54.0	-8.2	1.80 H	37	50.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

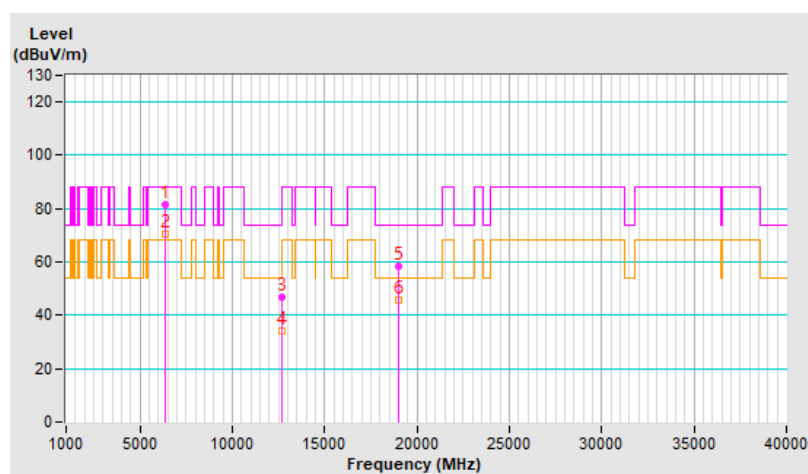


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	97.7 PK			1.24 V	89	91.3	6.4
2	*6345.00	86.3 AV			1.24 V	89	79.9	6.4
3	12690.00	45.1 PK	74.0	-28.9	1.61 V	79	30.2	14.9
4	12690.00	33.0 AV	54.0	-21.0	1.61 V	79	18.1	14.9
5	19035.00	58.4 PK	74.0	-15.6	1.76 V	25	63.3	-4.9
6	19035.00	45.9 AV	54.0	-8.1	1.76 V	25	50.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

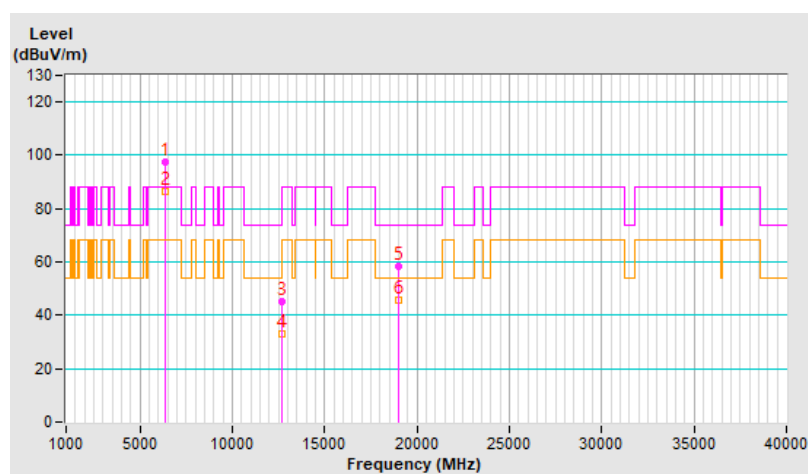


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	81.6 PK			1.52 H	35	73.8	7.8
2	*6665.00	71.1 AV			1.52 H	35	63.3	7.8
3	13330.00	46.8 PK	74.0	-27.2	1.83 H	127	31.5	15.3
4	13330.00	34.2 AV	54.0	-19.8	1.83 H	127	18.9	15.3
5	19995.00	58.2 PK	74.0	-15.8	1.80 H	21	62.6	-4.4
6	19995.00	45.4 AV	54.0	-8.6	1.80 H	21	49.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

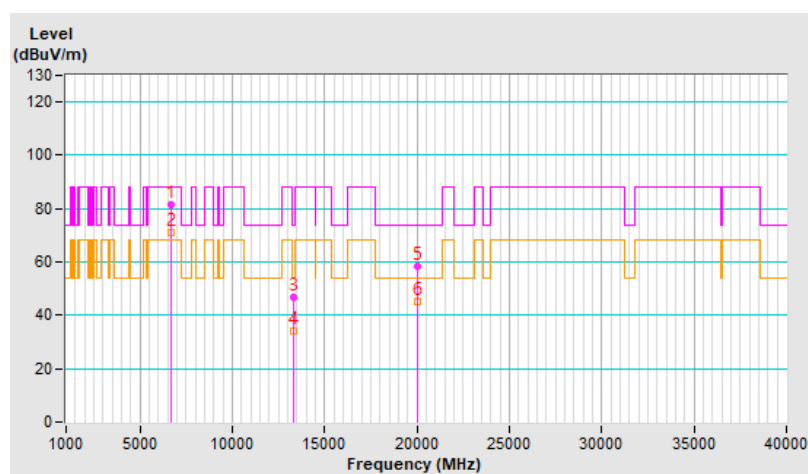


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	98.7 PK			1.77 V	80	90.9	7.8
2	*6665.00	87.7 AV			1.77 V	80	79.9	7.8
3	13330.00	44.7 PK	74.0	-29.3	1.65 V	97	29.4	15.3
4	13330.00	32.9 AV	54.0	-21.1	1.65 V	97	17.6	15.3
5	19995.00	58.7 PK	74.0	-15.3	1.76 V	39	63.1	-4.4
6	19995.00	46.0 AV	54.0	-8.0	1.76 V	39	50.4	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

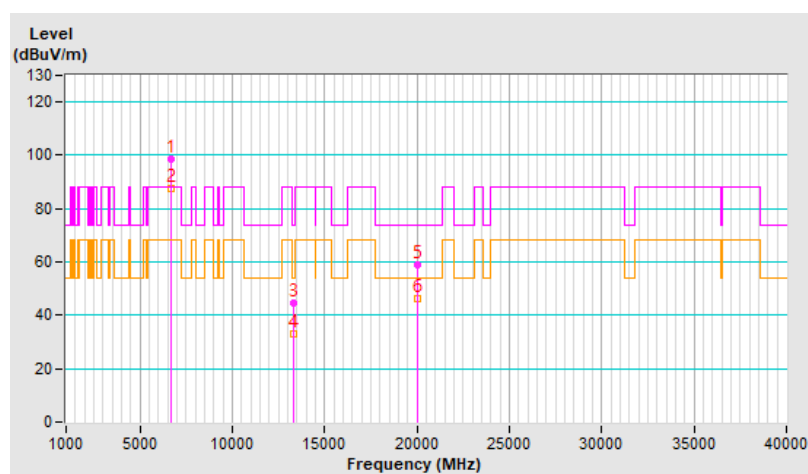


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11a Channel 1

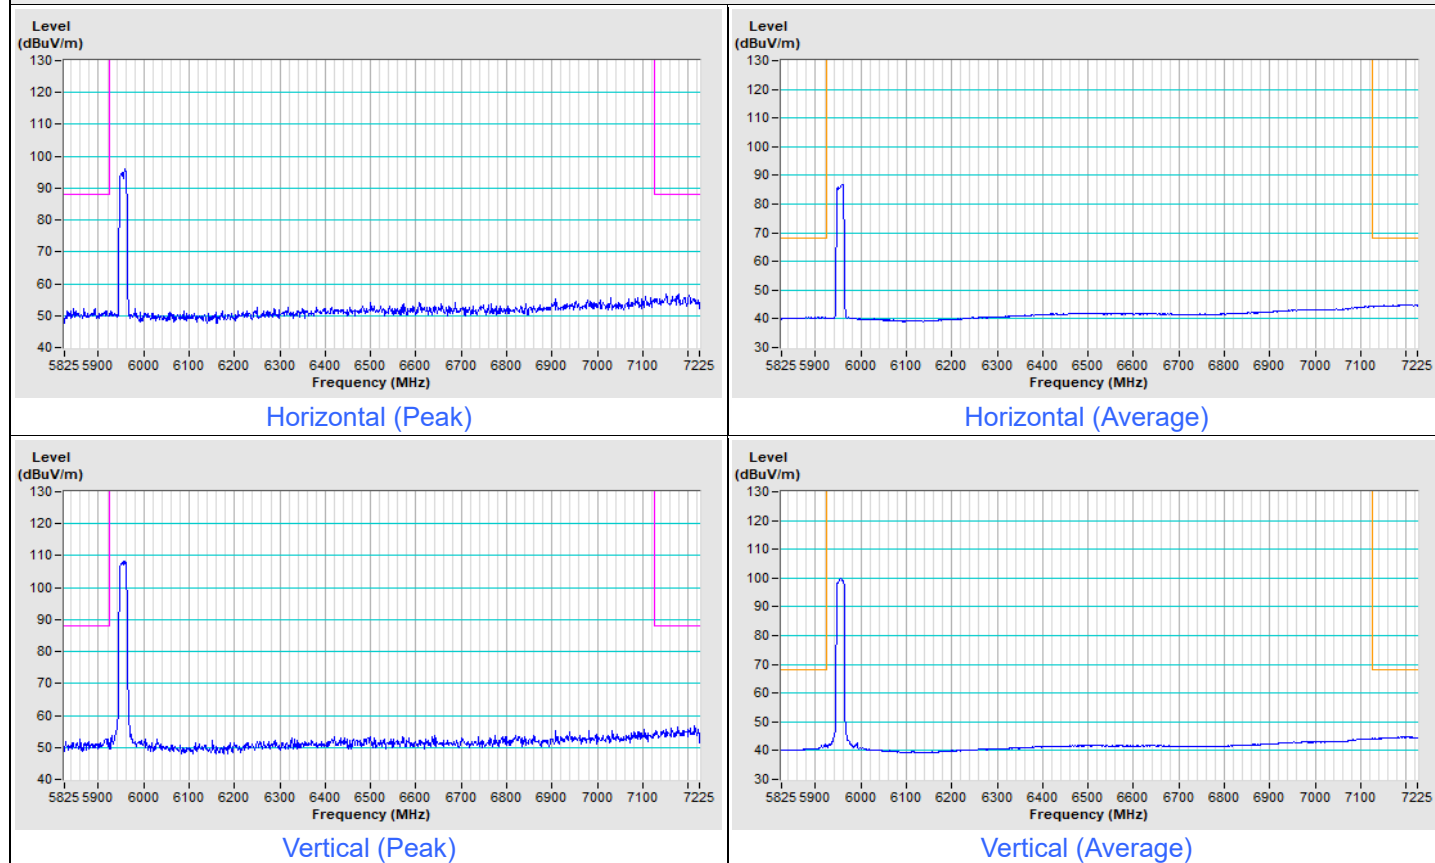


802.11a Channel 181

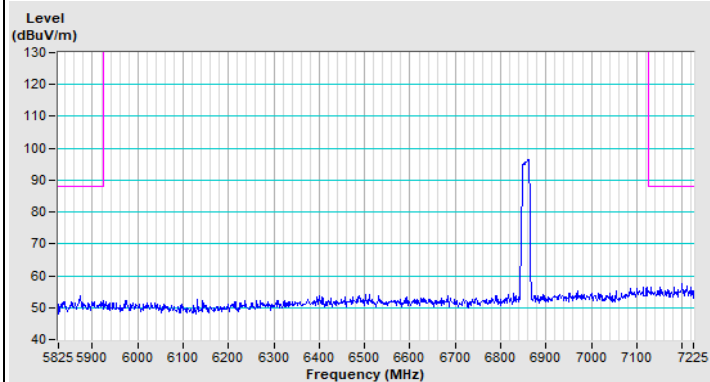


Horizontal (Peak)

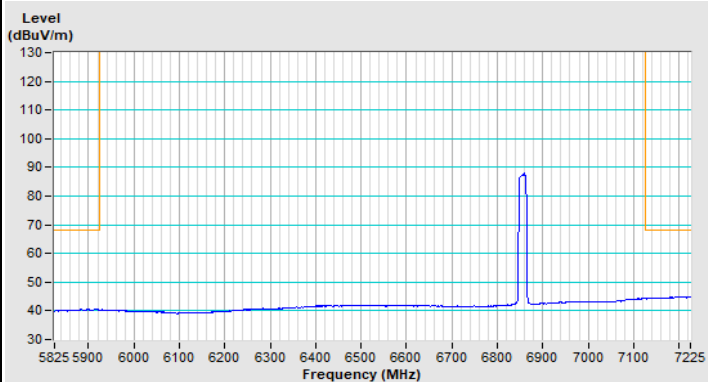

Horizontal (Average)

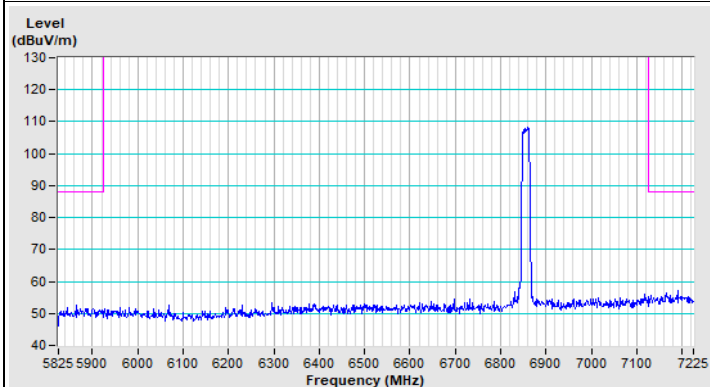


Vertical (Peak)

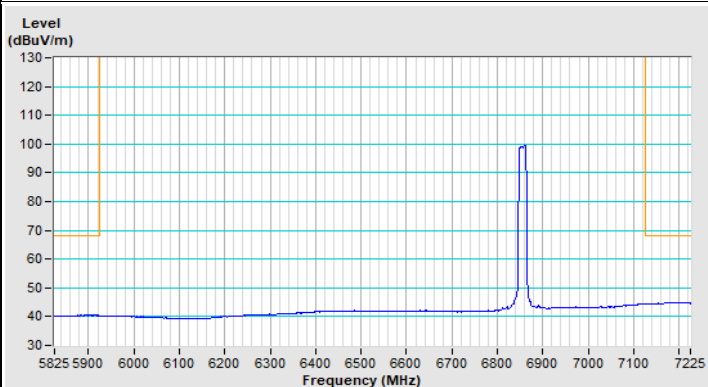


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) Channel 1

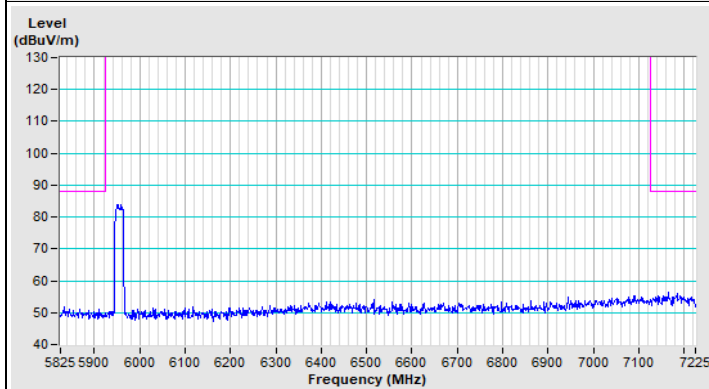


Horizontal (Peak)

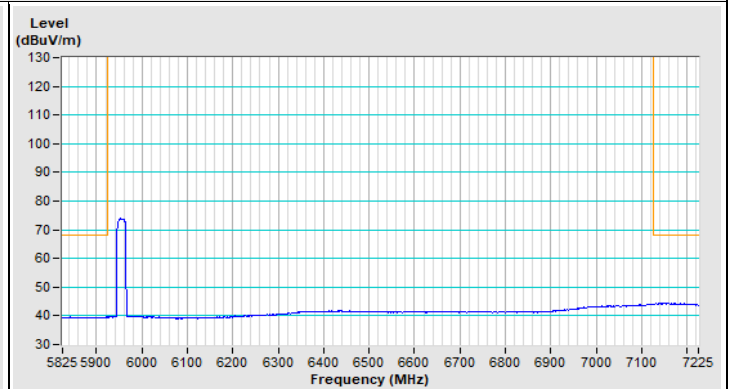


Horizontal (Average)

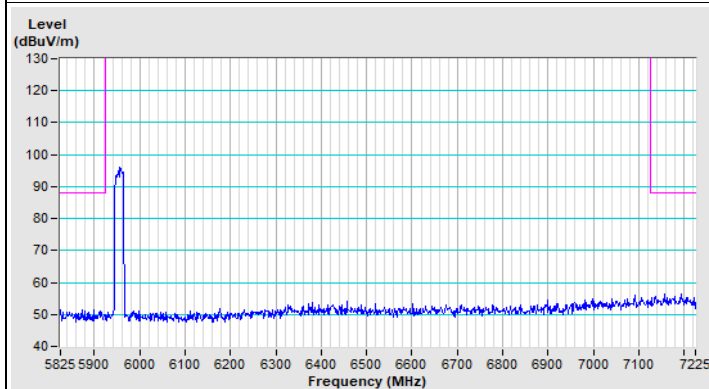


Vertical (Peak)

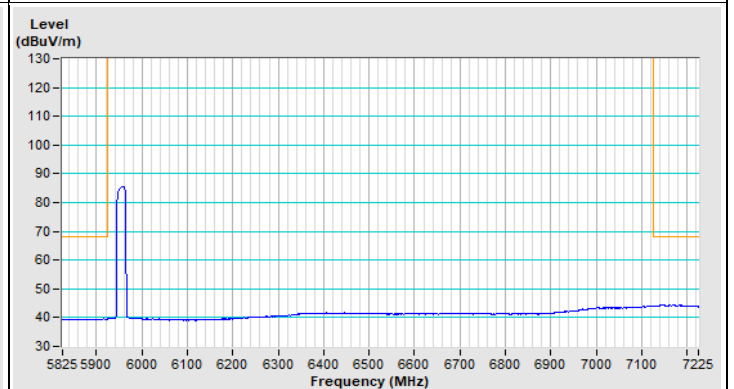


Vertical (Average)

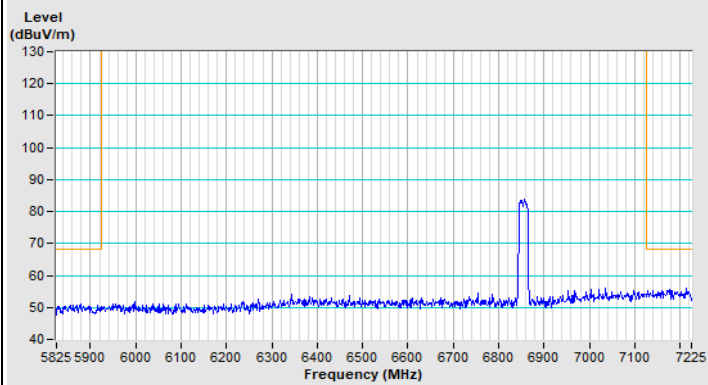802.11be (EHT20) Channel 181


Horizontal (Peak)

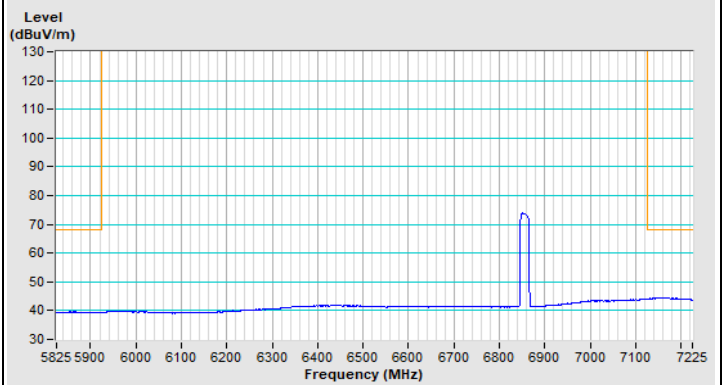

Horizontal (Average)

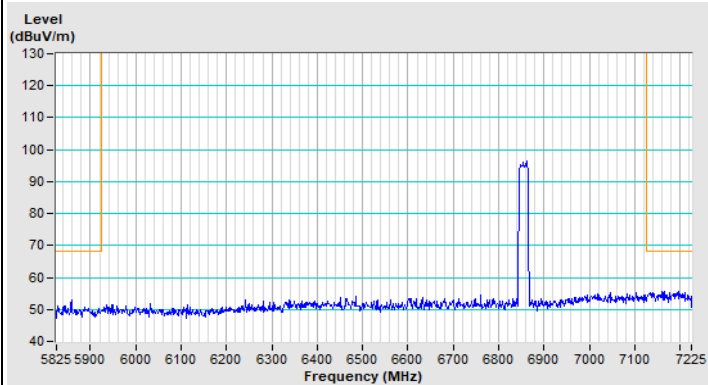


Vertical (Peak)

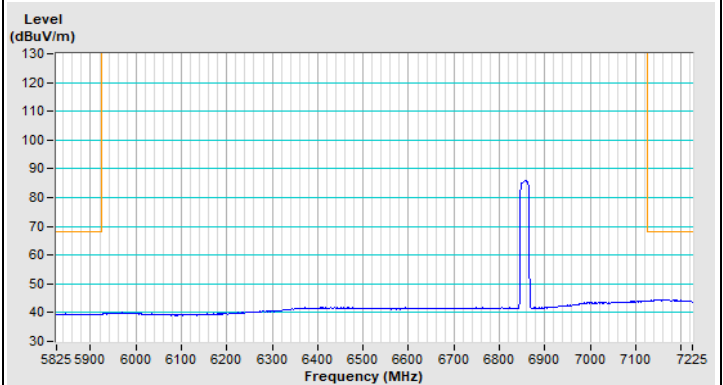


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 3

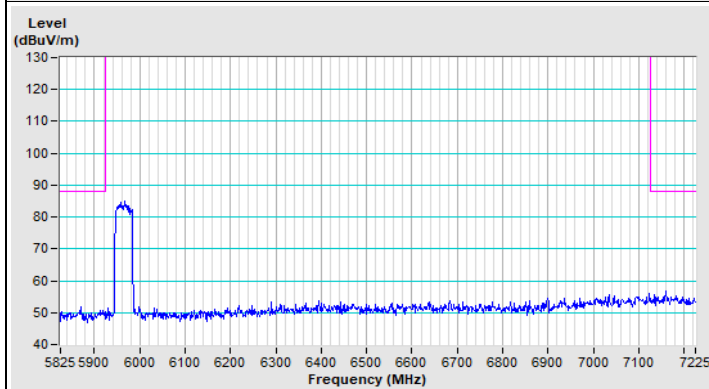


Horizontal (Peak)

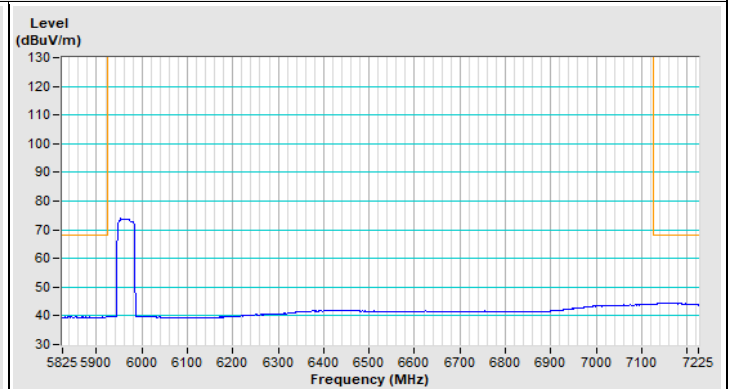


Horizontal (Average)

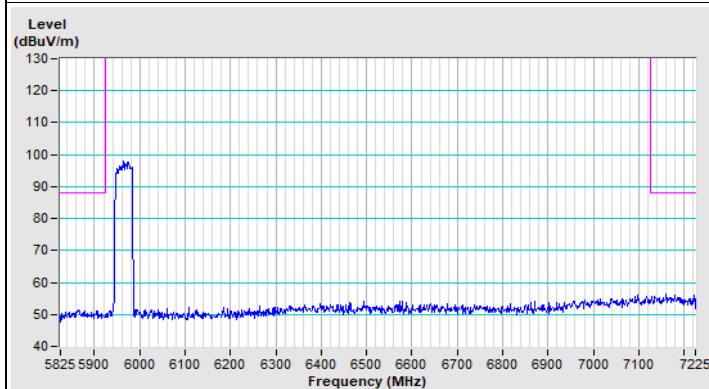


Vertical (Peak)

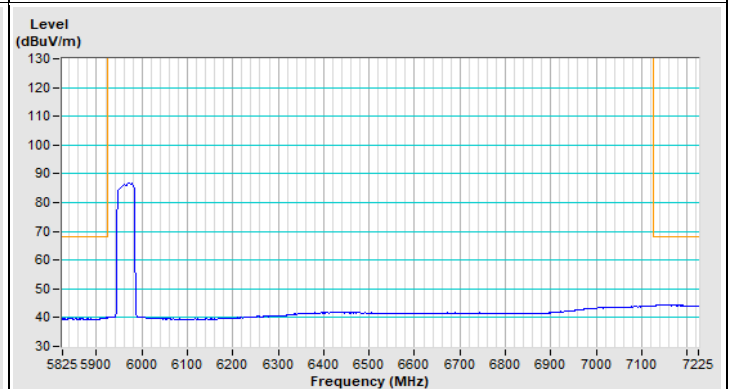


Vertical (Average)

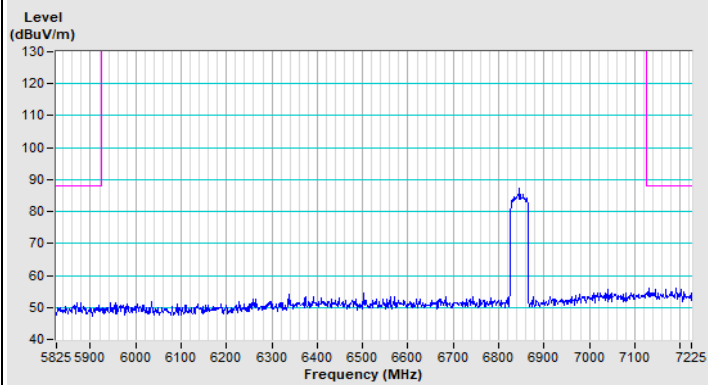802.11be (EHT40) Channel 179


Horizontal (Peak)

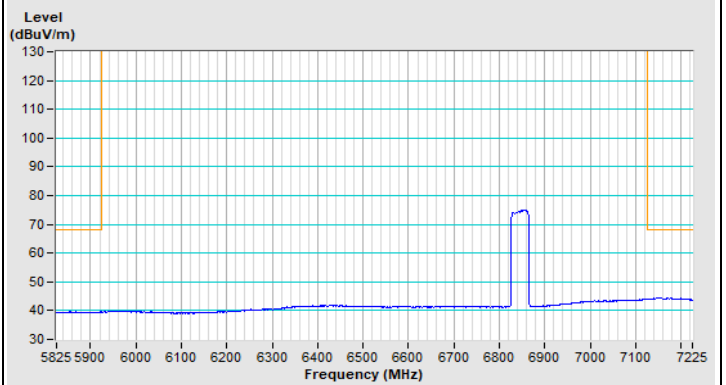

Horizontal (Average)

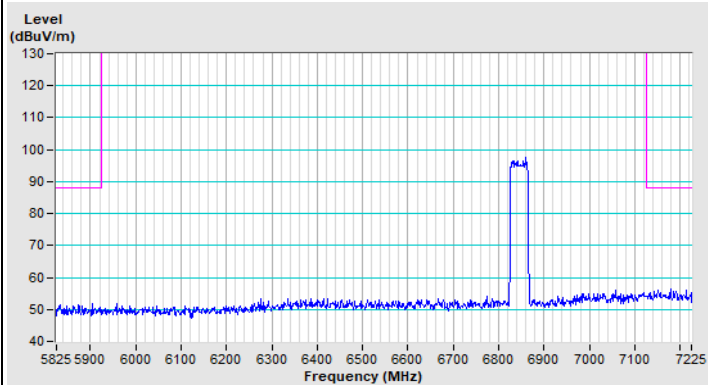


Vertical (Peak)

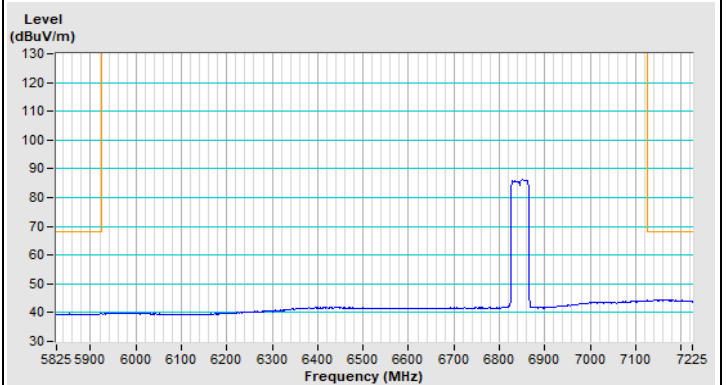


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 7

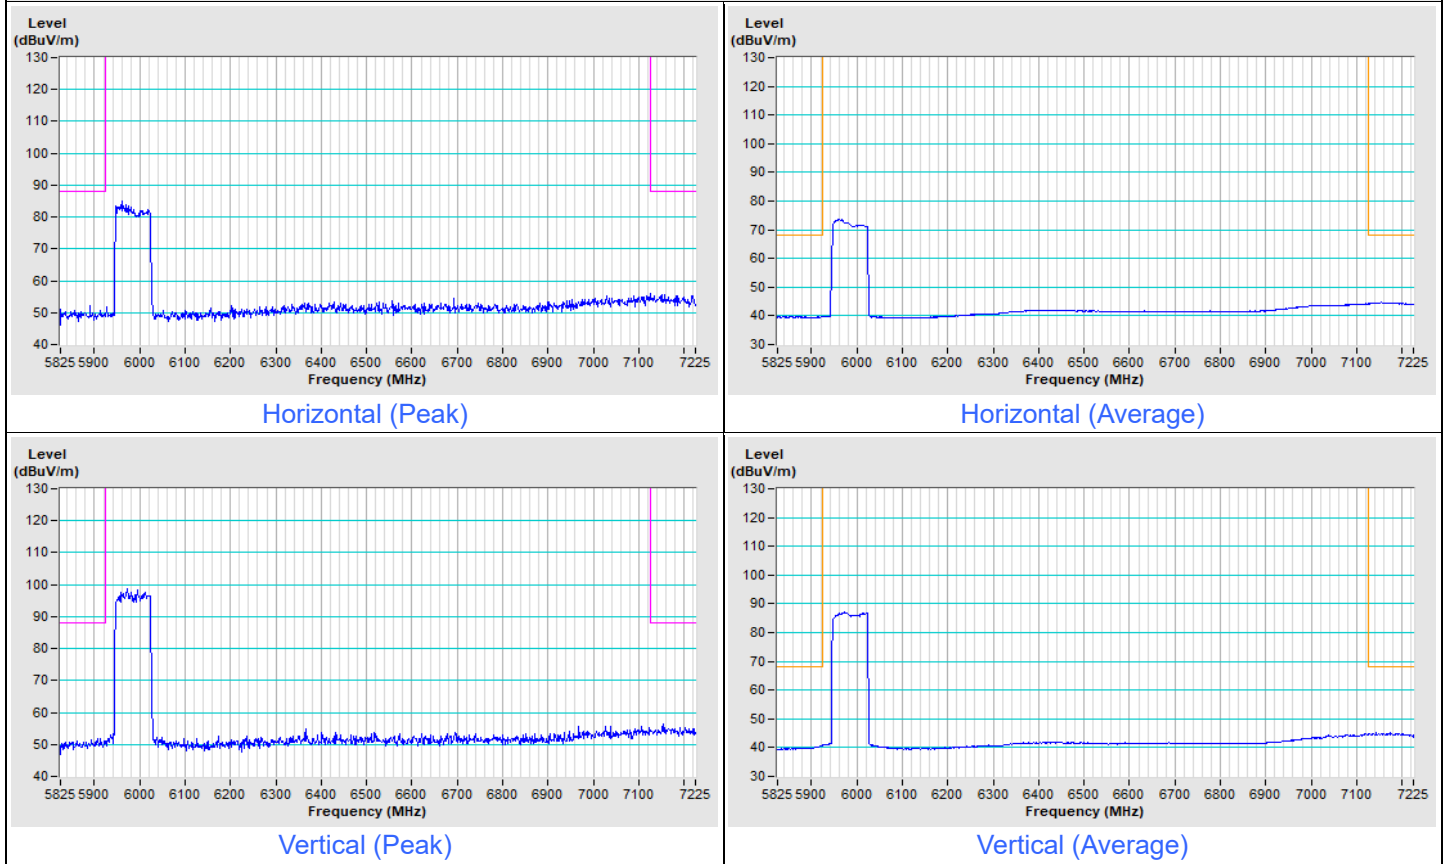


802.11be (EHT80) Channel 167

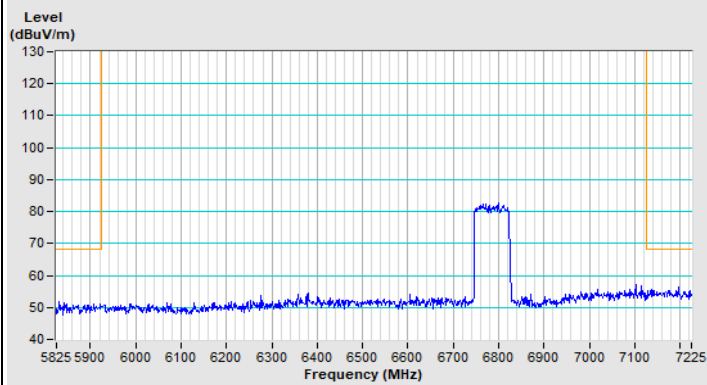


Horizontal (Peak)

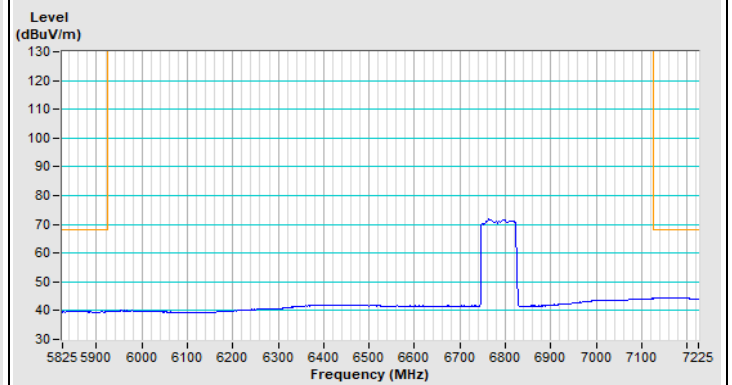

Horizontal (Average)

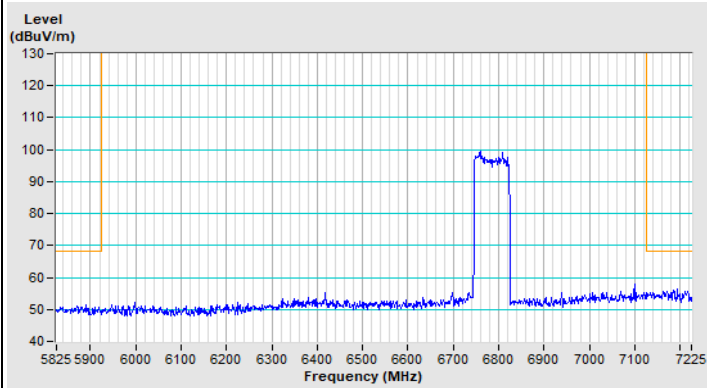


Vertical (Peak)

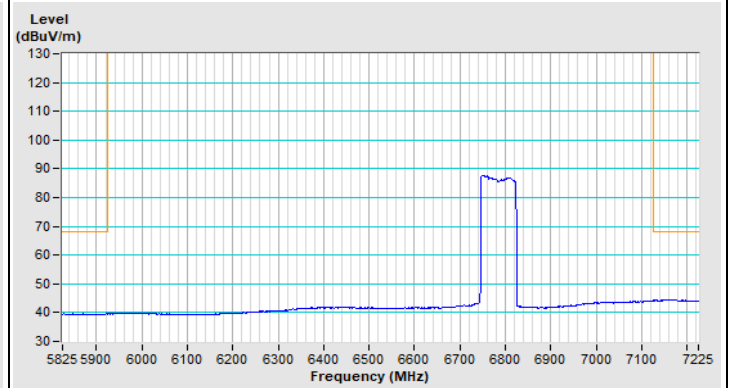


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 15

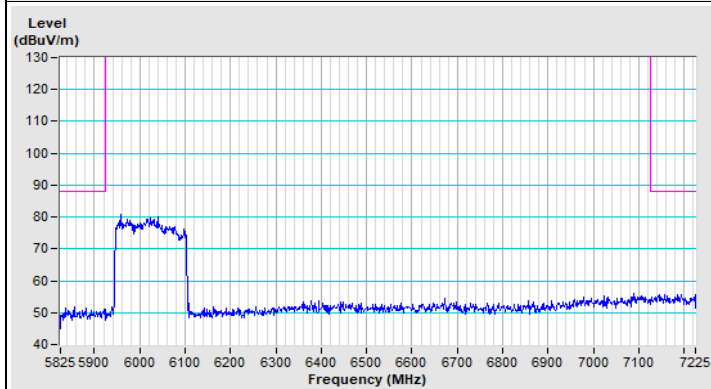


Horizontal (Peak)

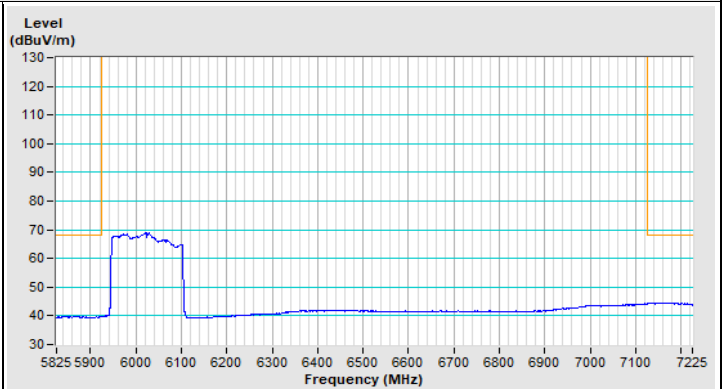

Horizontal (Average)

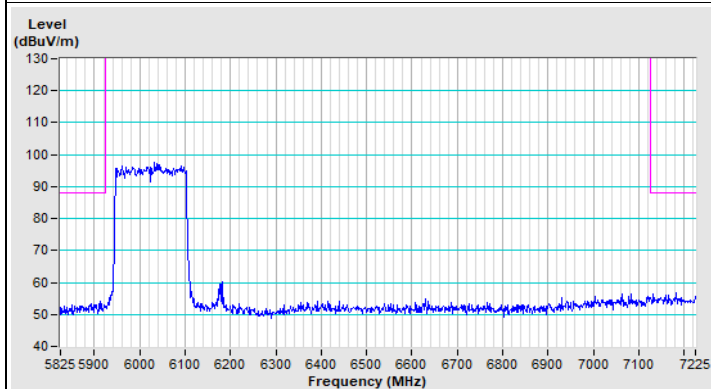


Vertical (Peak)

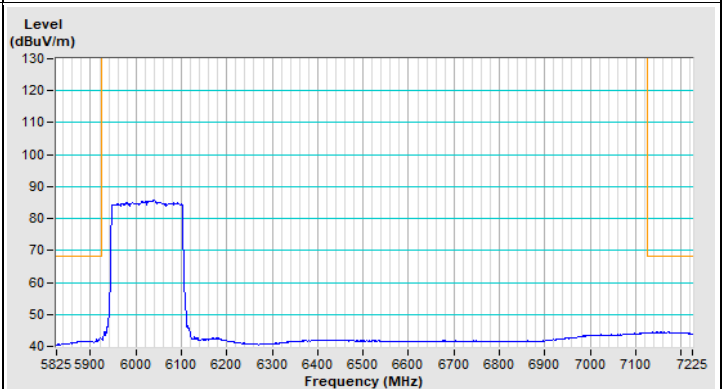


Vertical (Average)


802.11be (EHT160) Channel 143

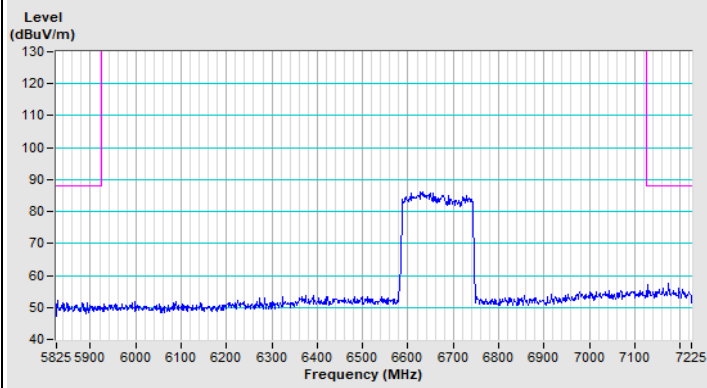


Horizontal (Peak)

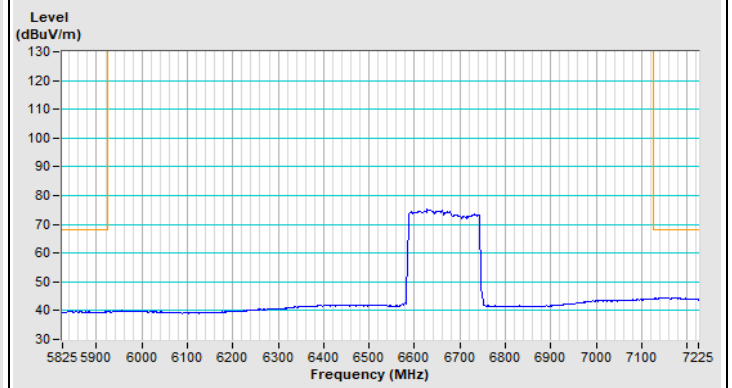

Horizontal (Average)

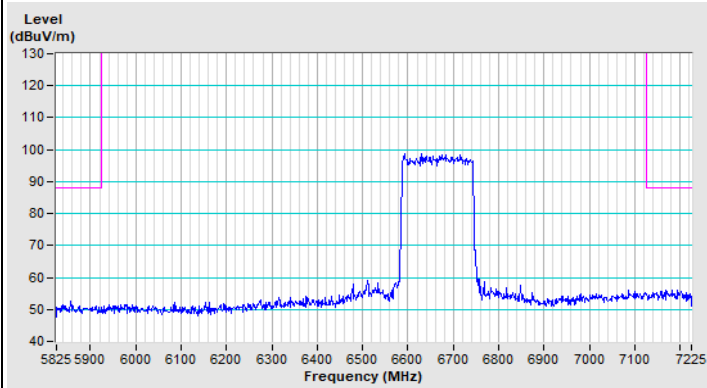


Vertical (Peak)

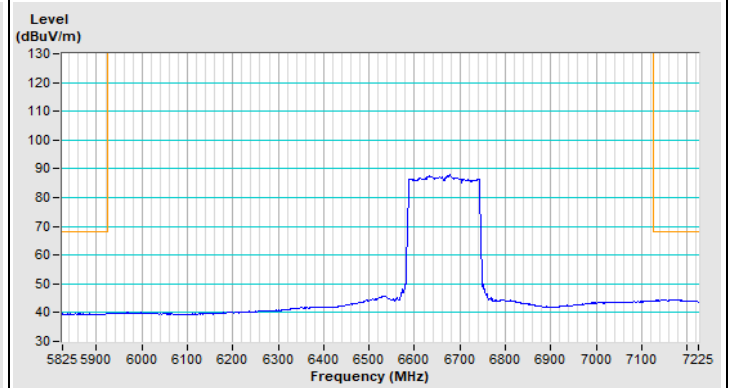


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

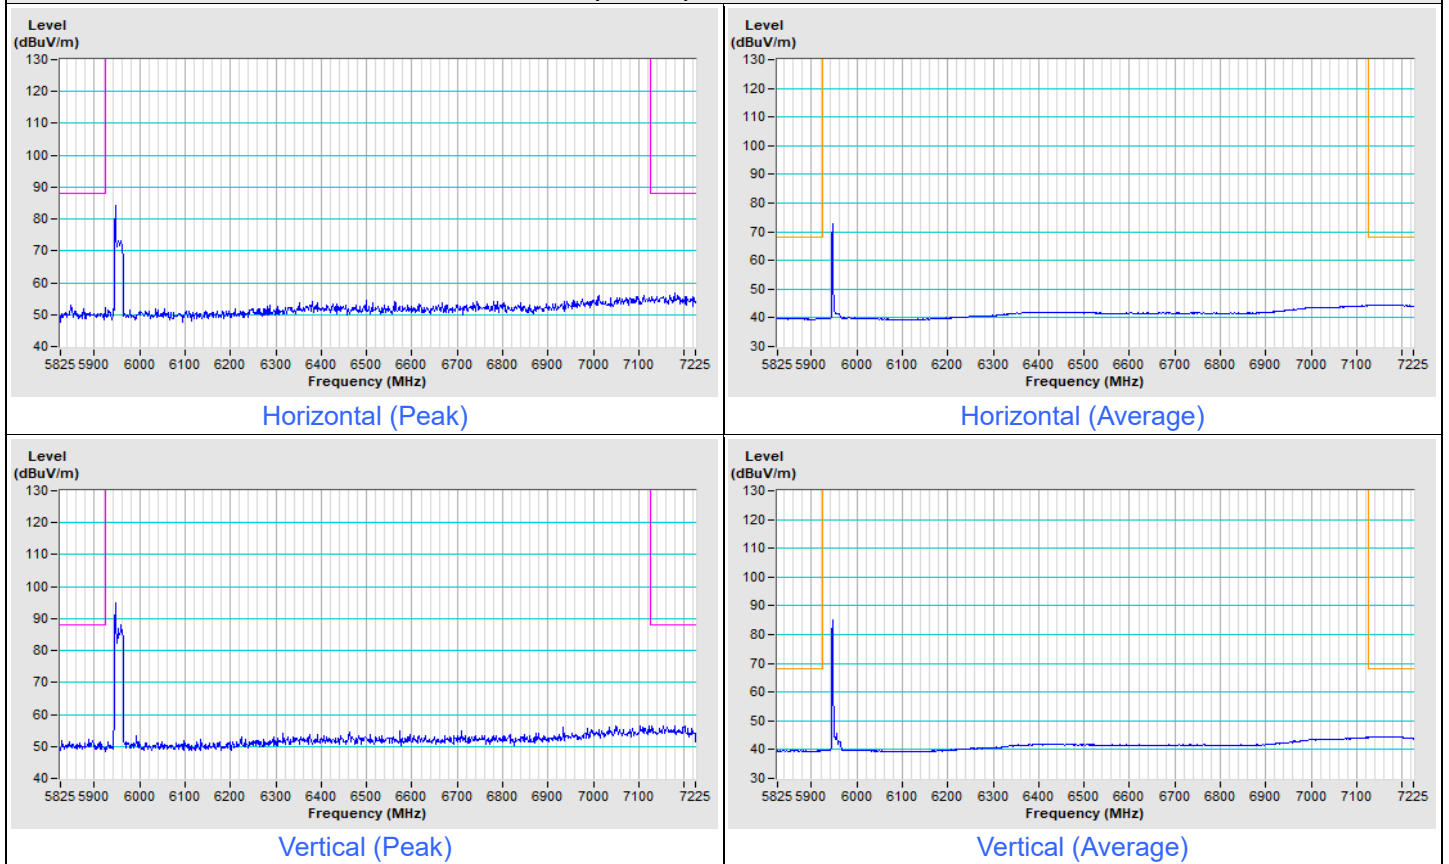


802.11be (EHT20) 26-tone RU Channel 181

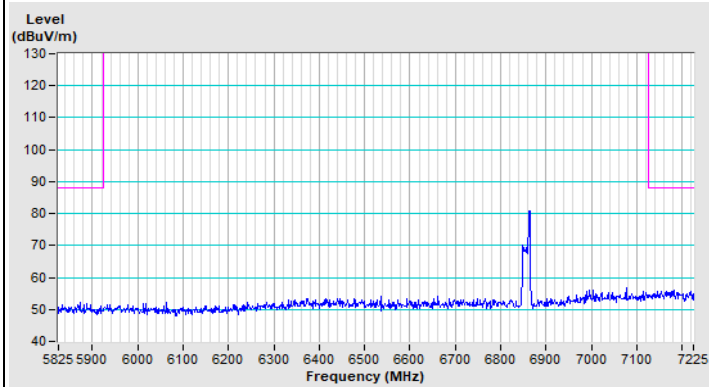


Horizontal (Peak)

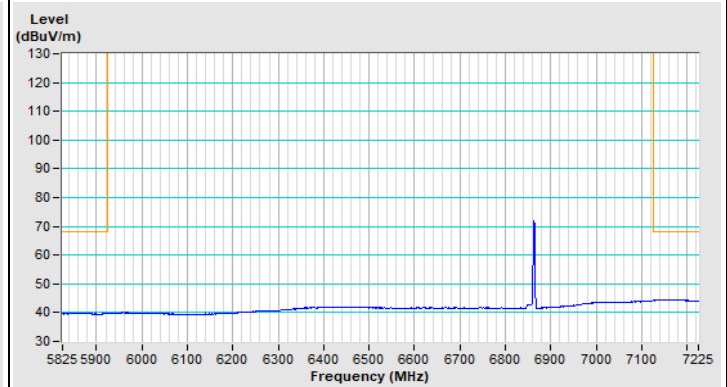

Horizontal (Average)

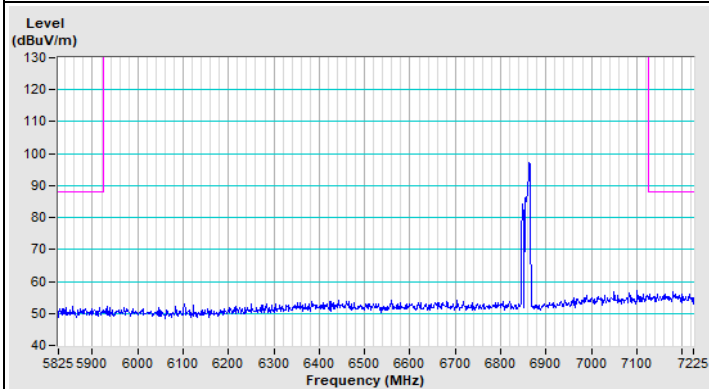


Vertical (Peak)

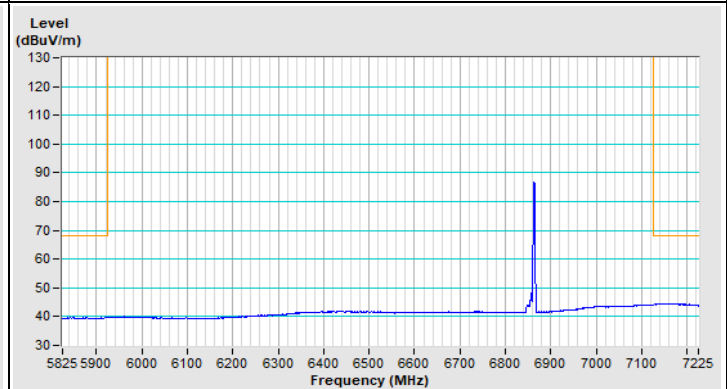


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

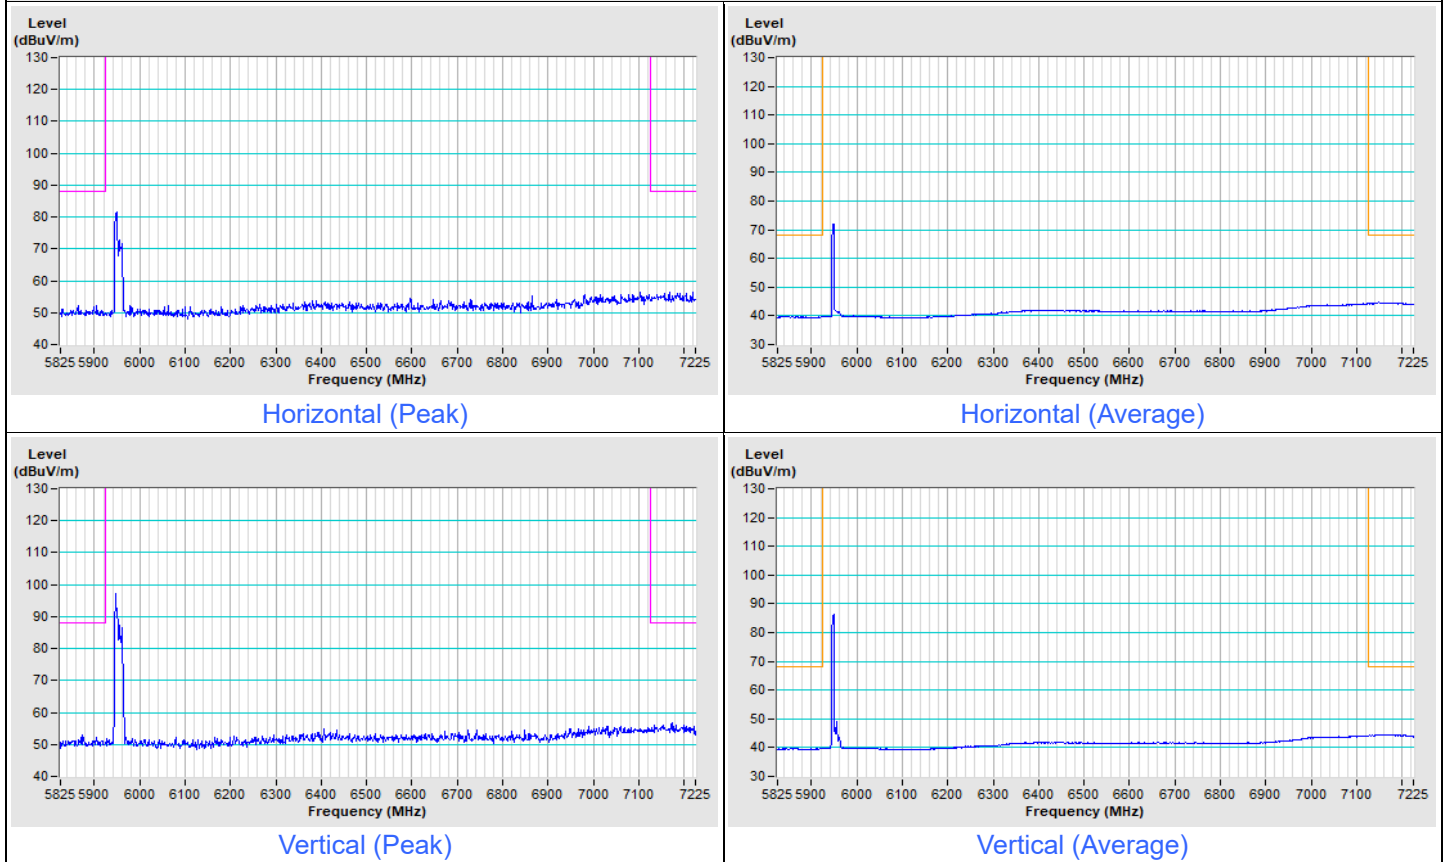


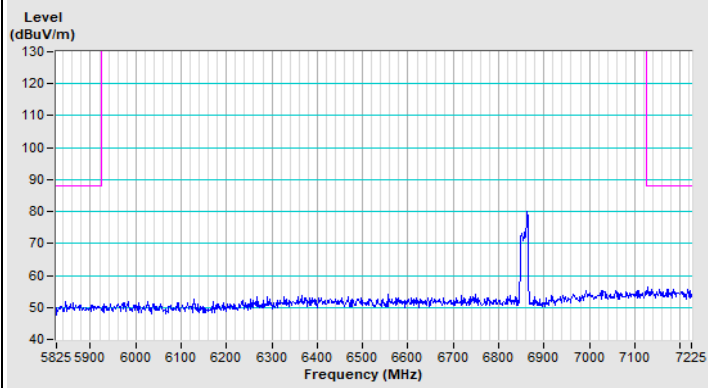802.11be (EHT20) 52-tone RU Channel 181


Horizontal (Peak)

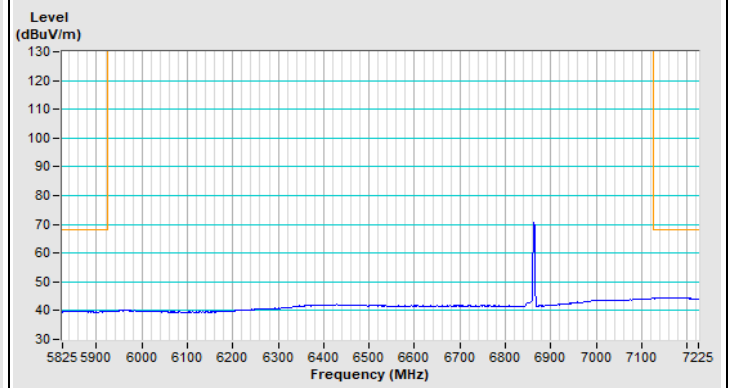

Horizontal (Average)

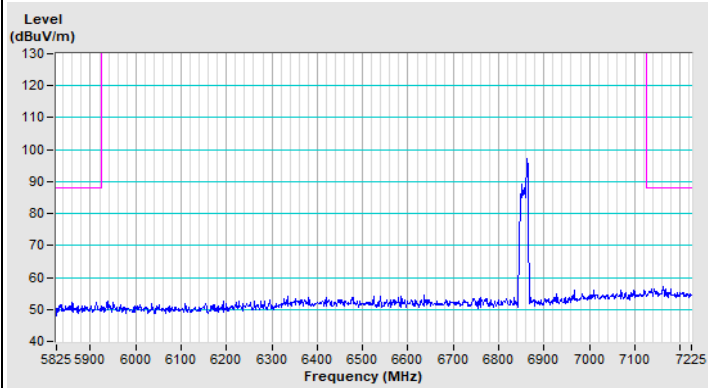


Vertical (Peak)

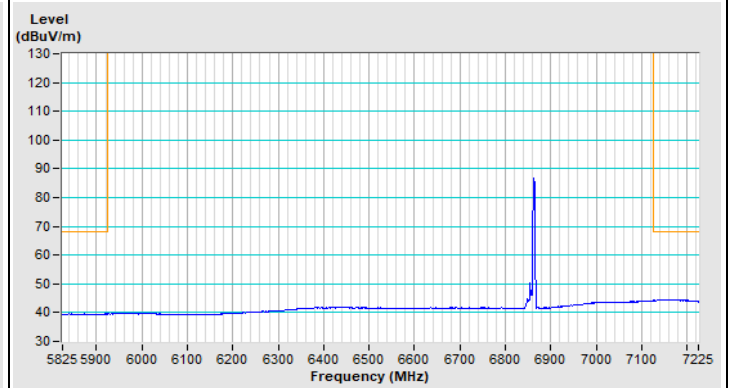


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

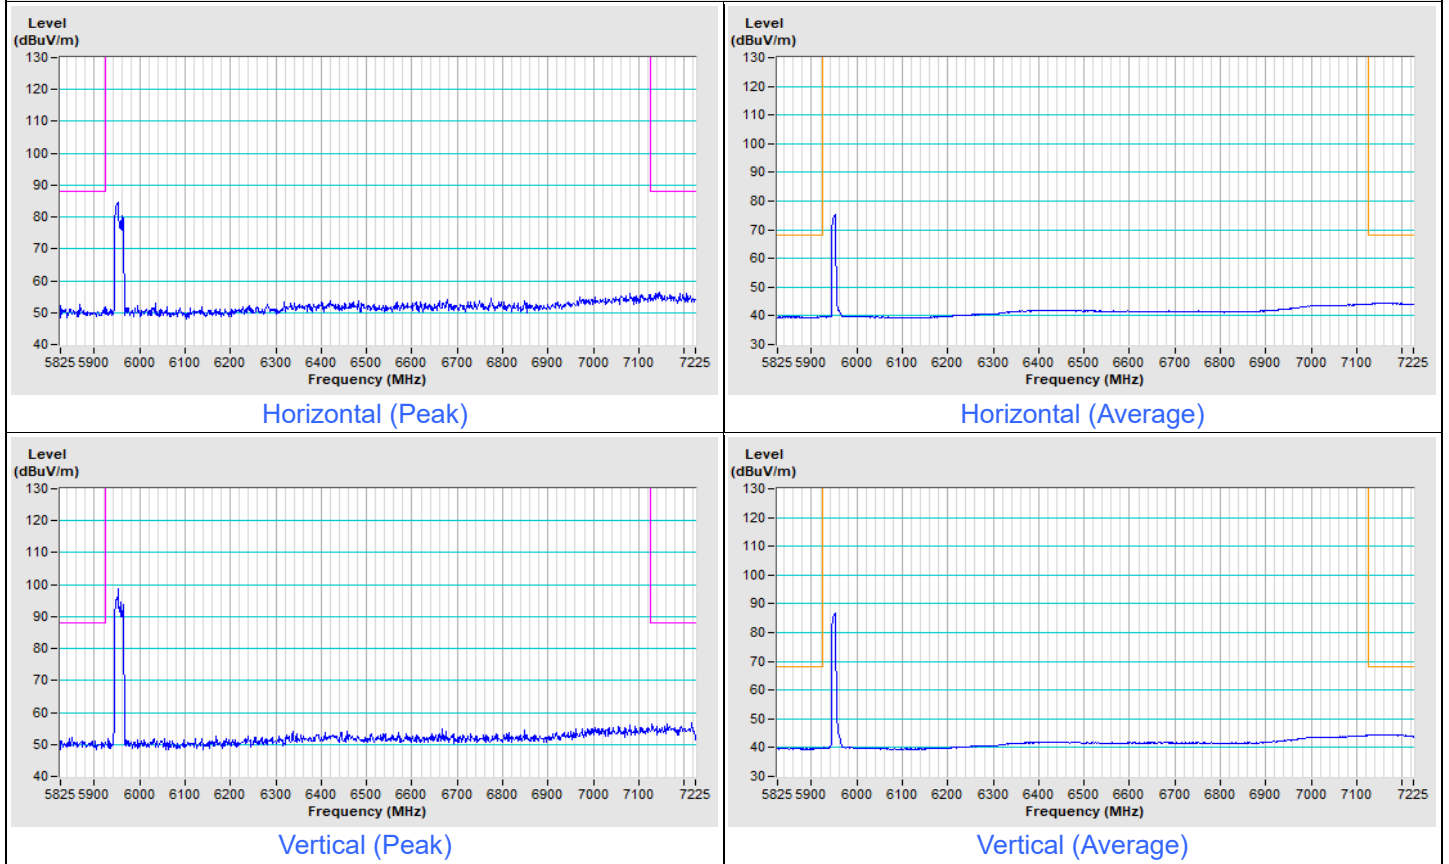


802.11be (EHT20) 106-tone RU Channel 181

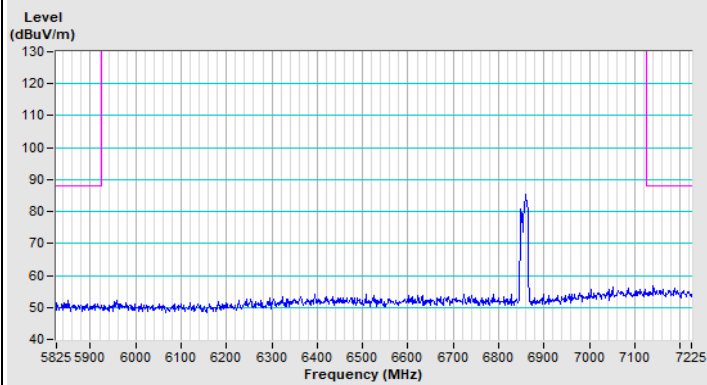


Horizontal (Peak)

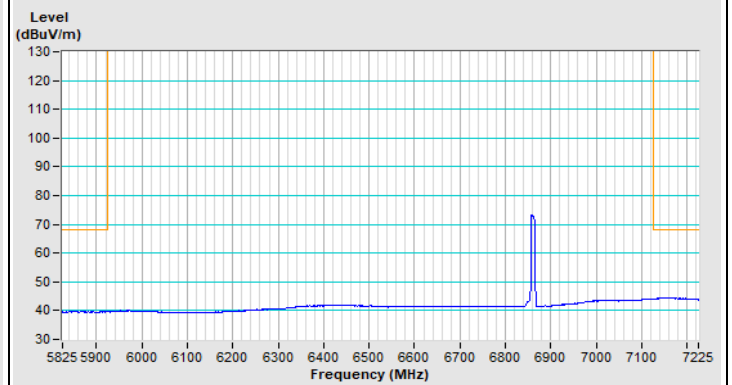

Horizontal (Average)

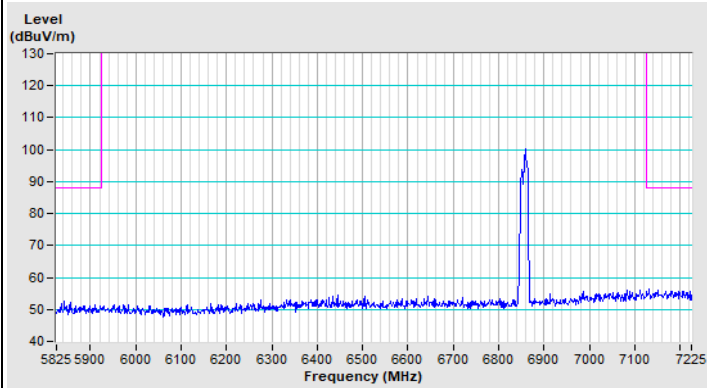


Vertical (Peak)

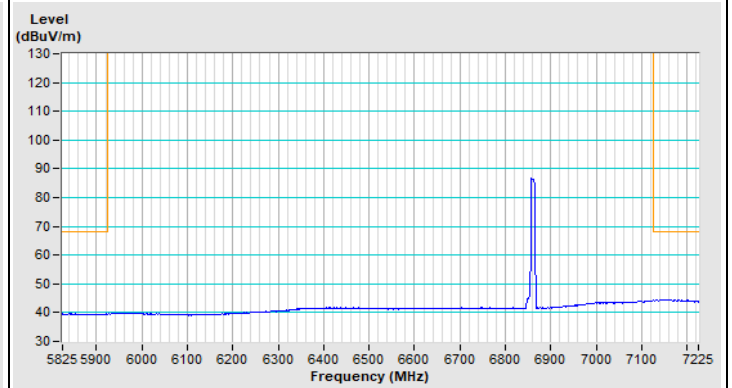


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

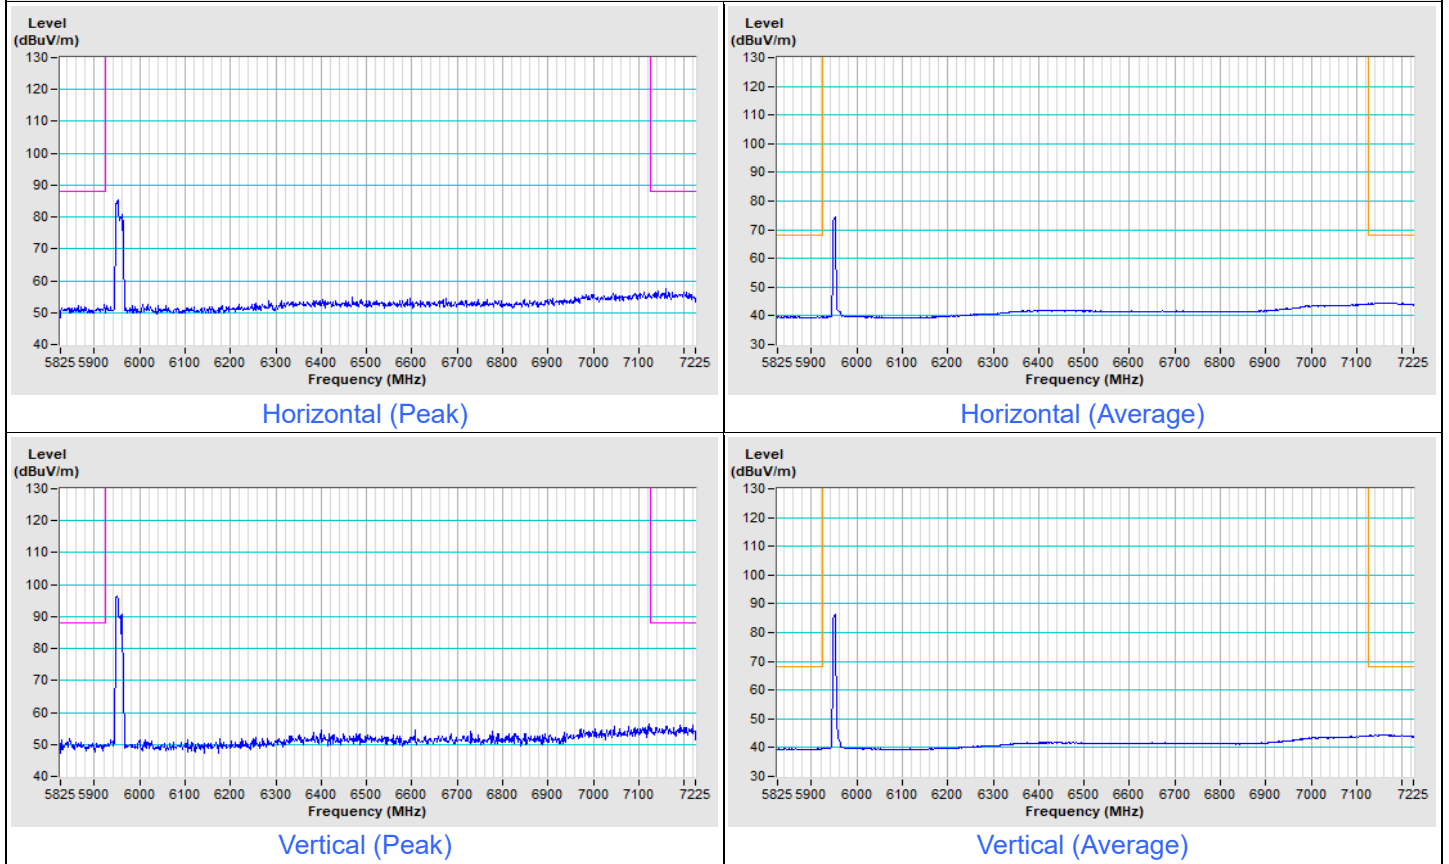


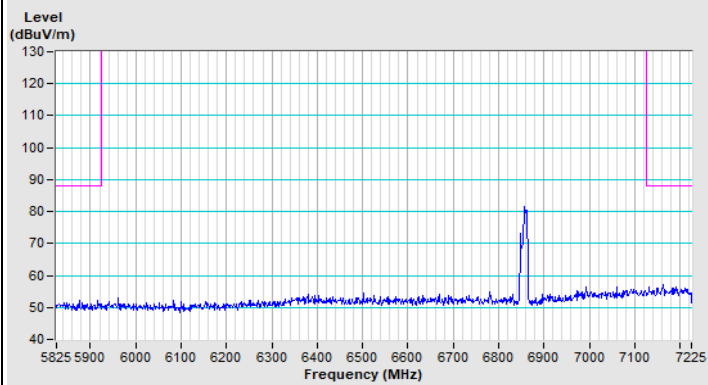802.11be (EHT20) 52+26-tone MRU Channel 181


Horizontal (Peak)

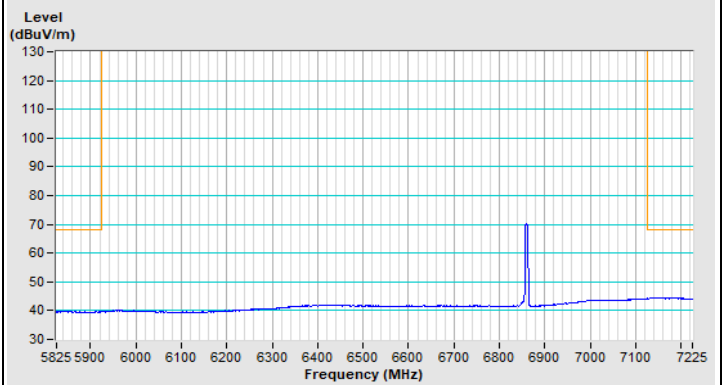

Horizontal (Average)

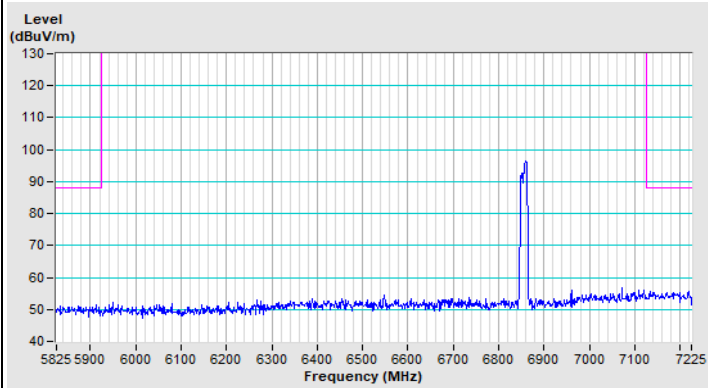


Vertical (Peak)

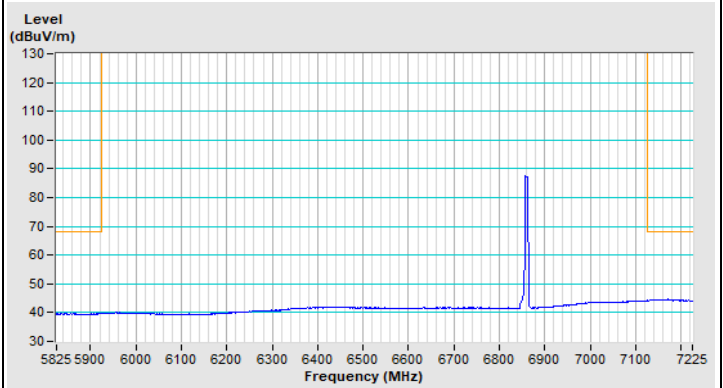


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

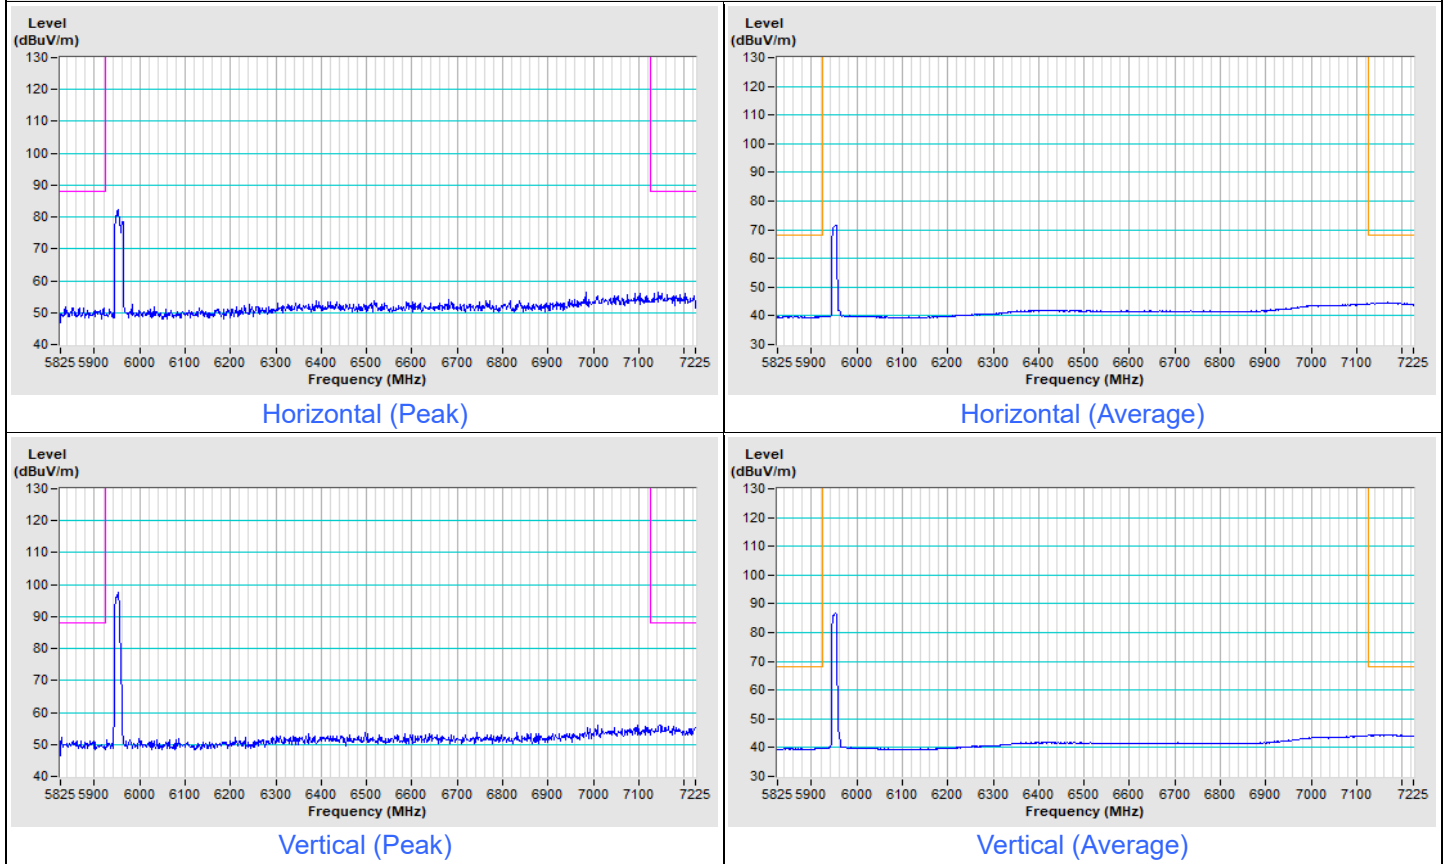


802.11be (EHT20) 106+26-tone MRU Channel 181

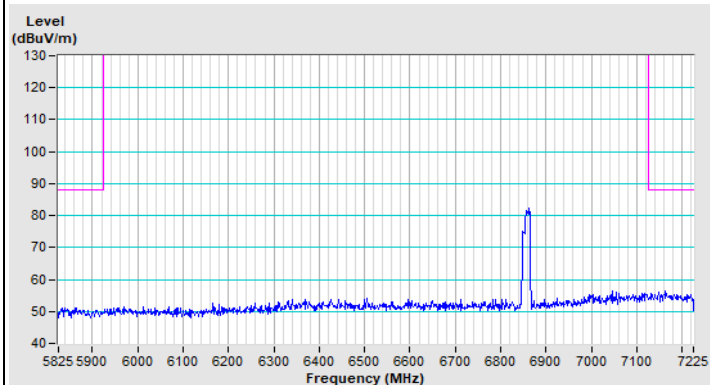


Horizontal (Peak)

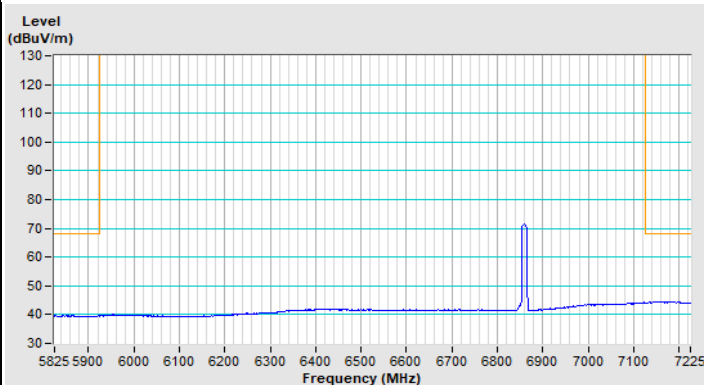

Horizontal (Average)

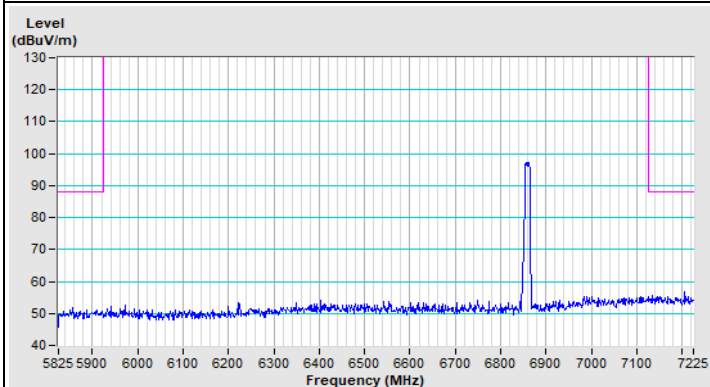


Vertical (Peak)

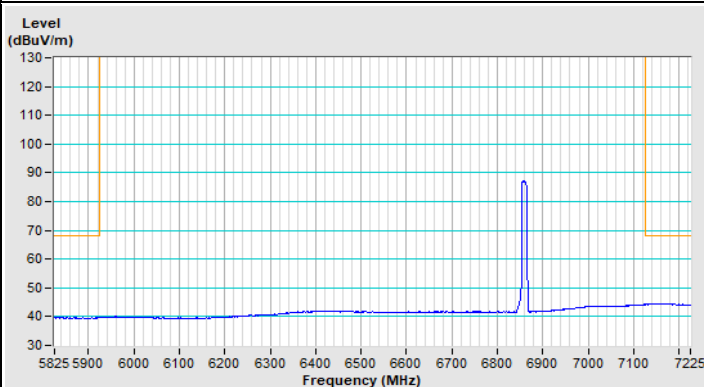


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

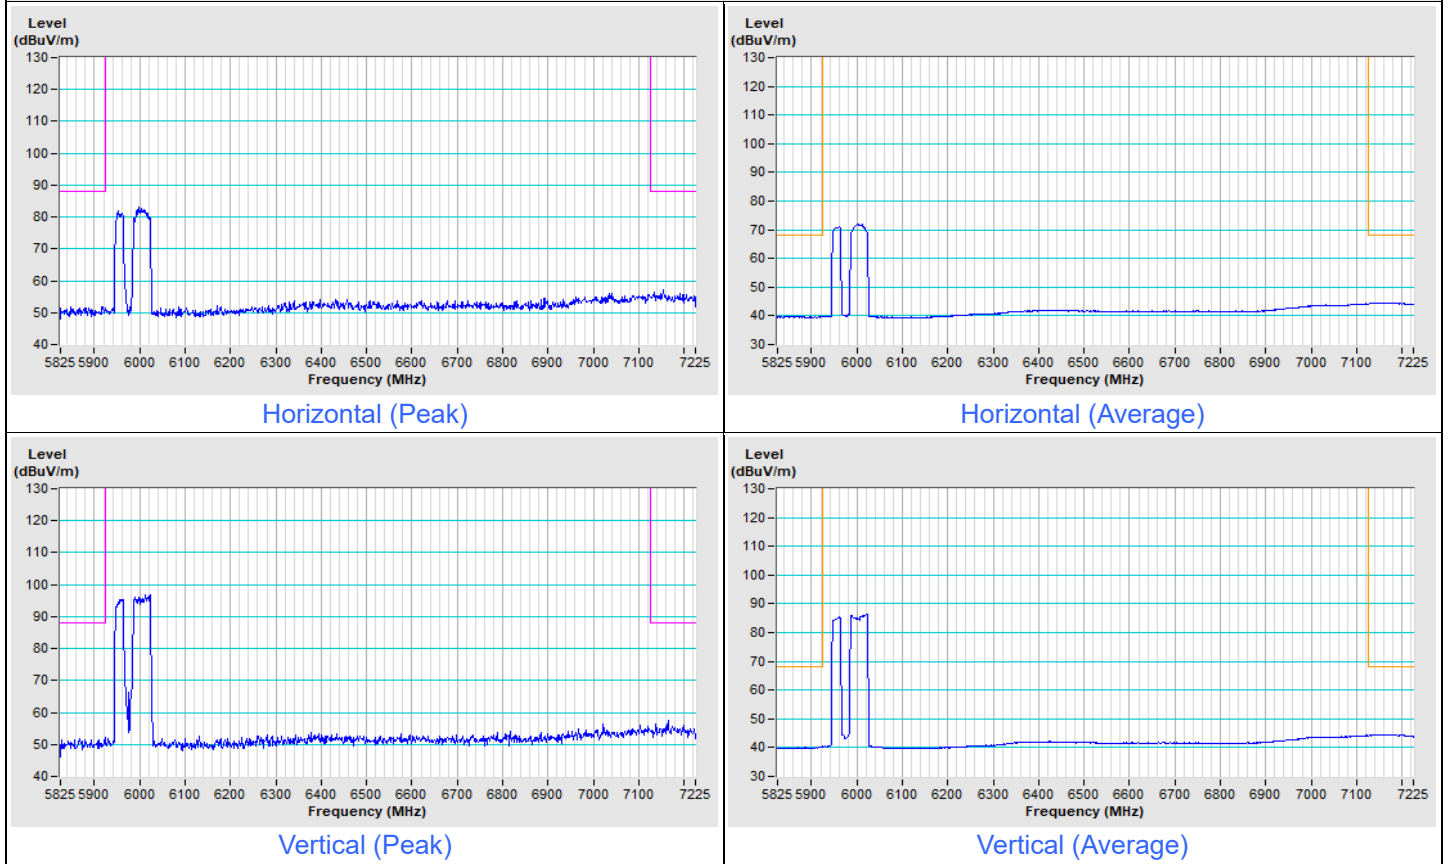


802.11be (EHT80) 484+242-tone MRU Channel 167

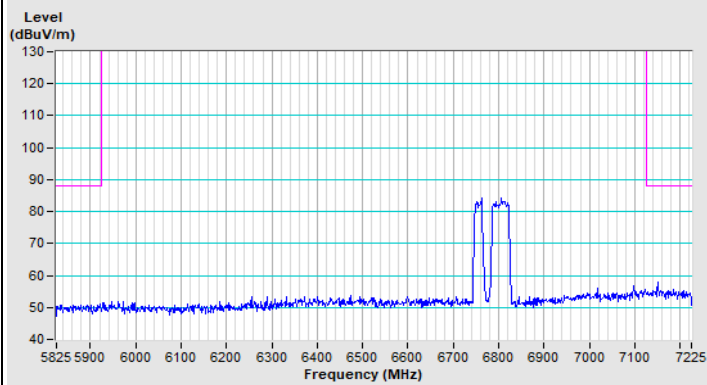


Horizontal (Peak)

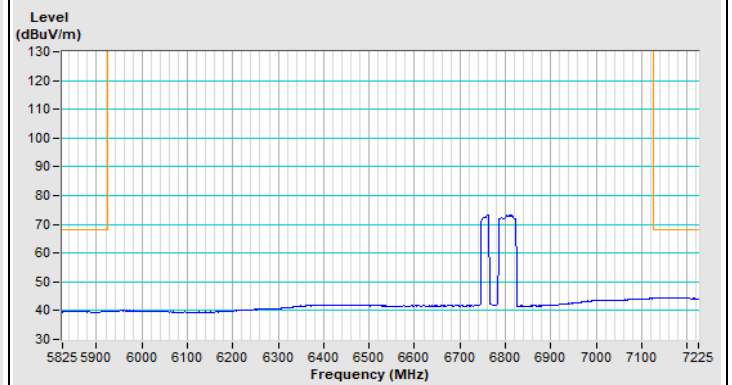

Horizontal (Average)

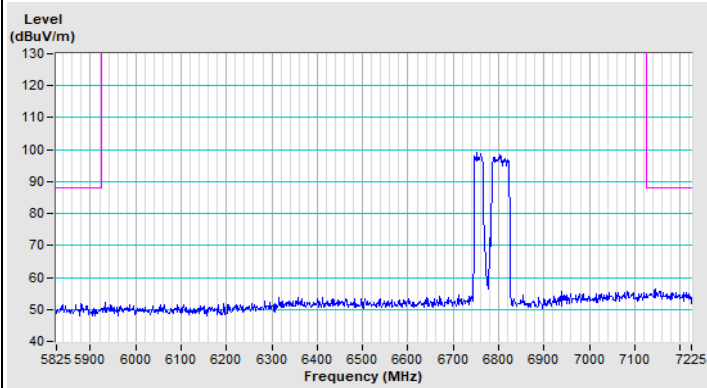


Vertical (Peak)

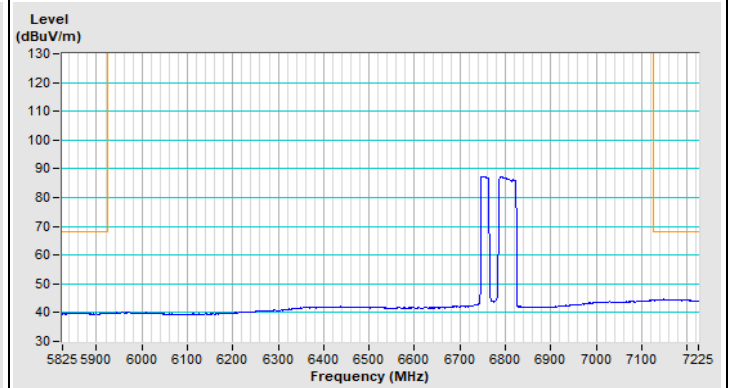


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT) 996+484-tone MRU Channel 15

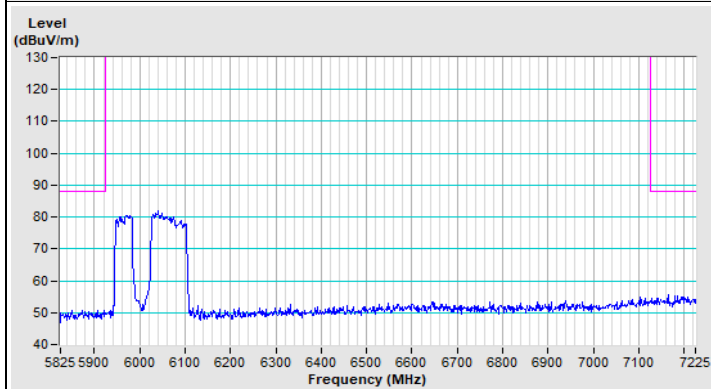


Horizontal (Peak)

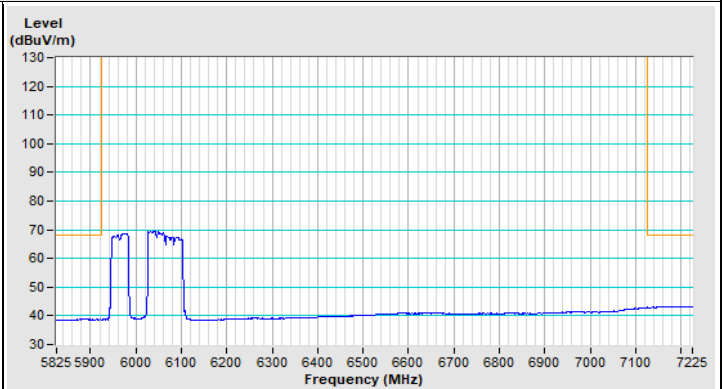

Horizontal (Average)

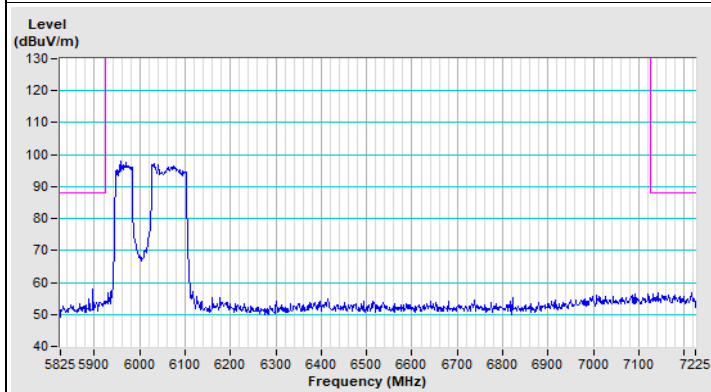


Vertical (Peak)

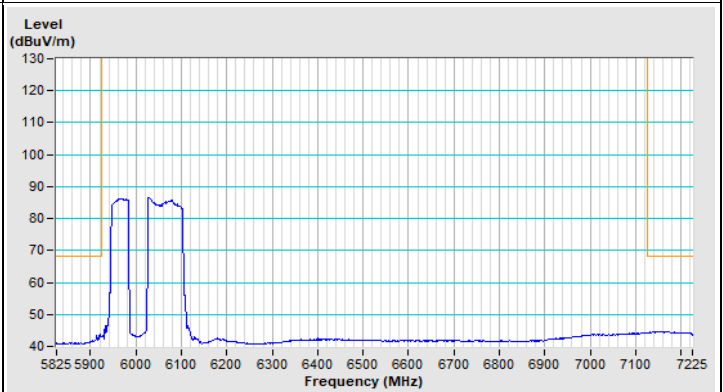


Vertical (Average)


802.11be (EHT) 996+484-tone MRU Channel 143

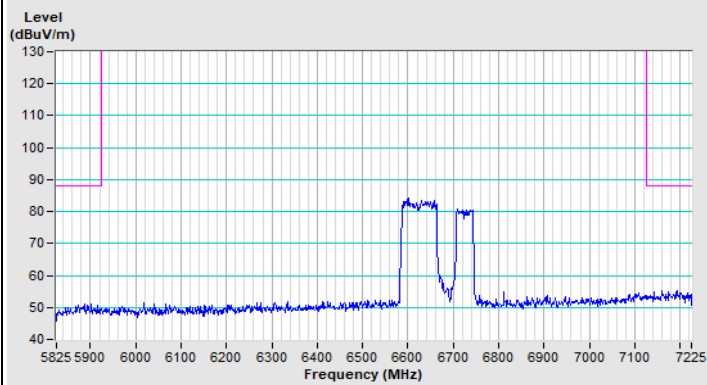


Horizontal (Peak)

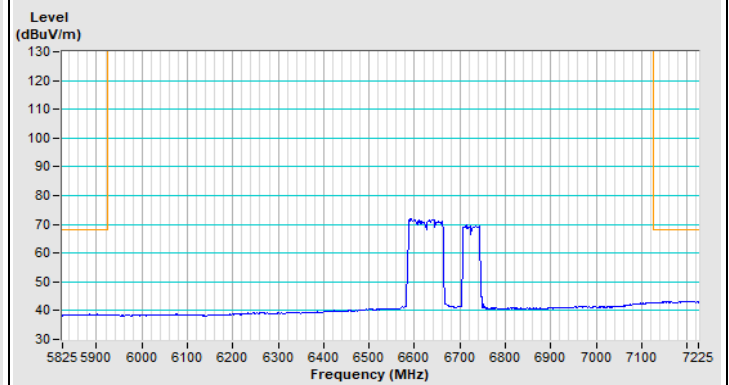

Horizontal (Average)

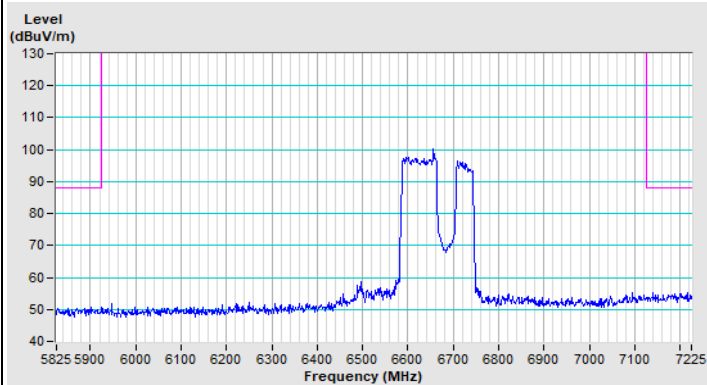


Vertical (Peak)

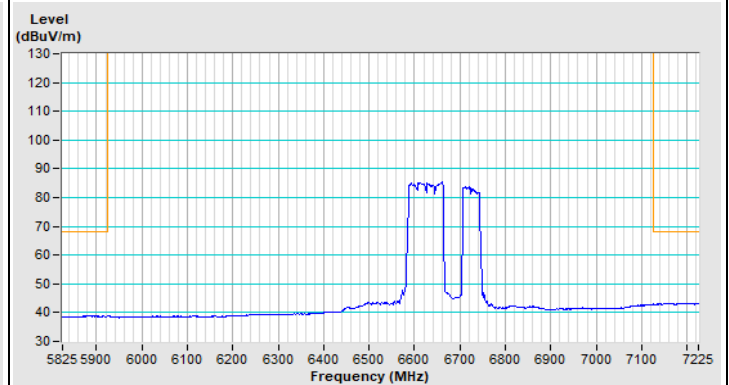


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT) 996+484+242-tone MRU Channel 15

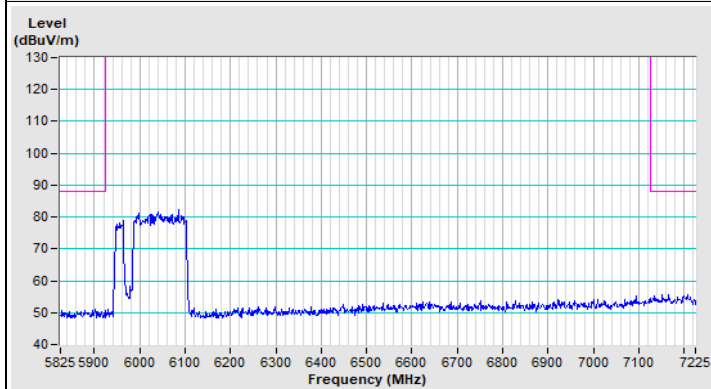


Horizontal (Peak)

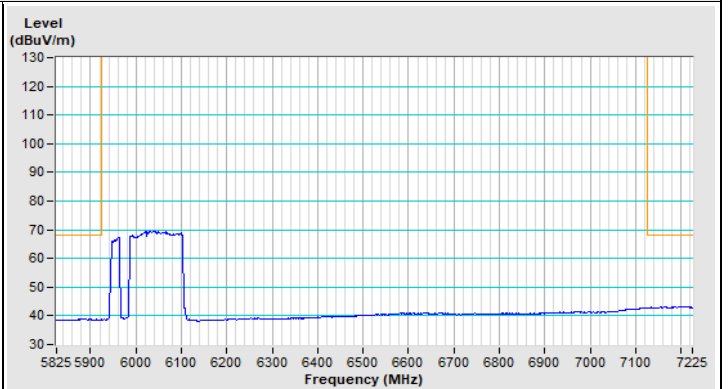

Horizontal (Average)

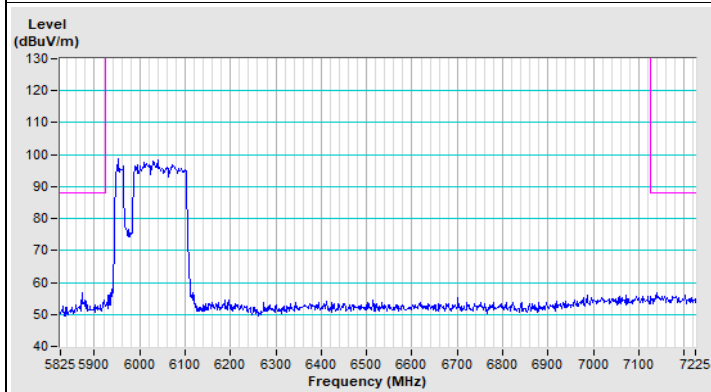


Vertical (Peak)

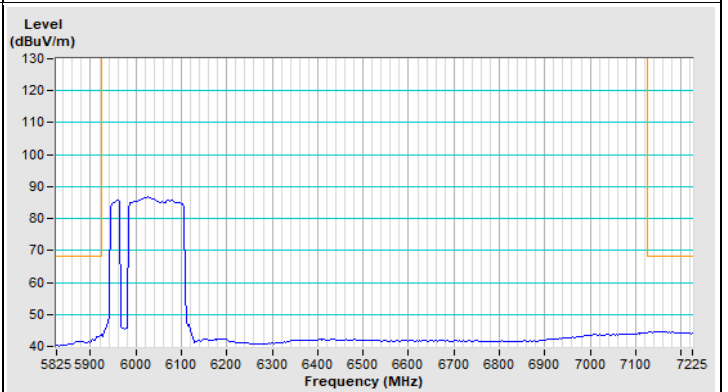


Vertical (Average)


802.11be (EHT) 996+484+242-tone MRU Channel 143

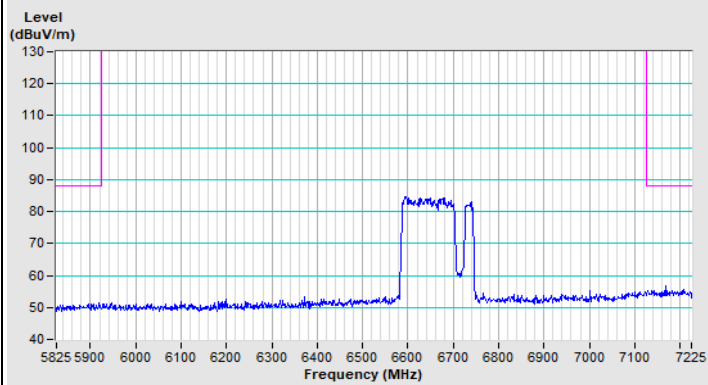


Horizontal (Peak)

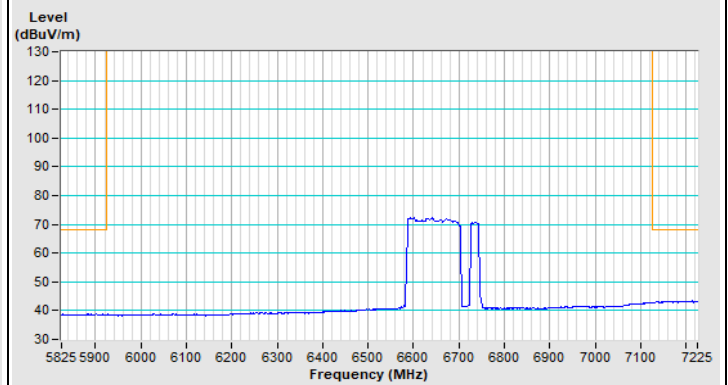

Horizontal (Average)

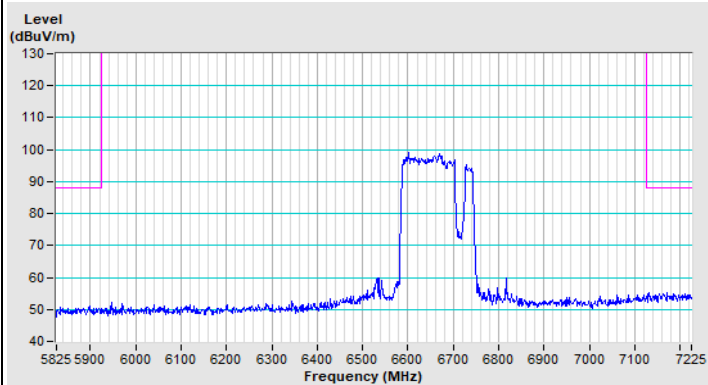

Vertical (Peak)

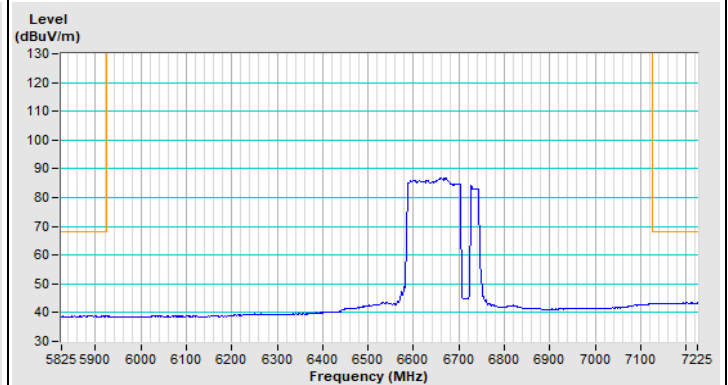

Vertical (Average)