



# LS RESEARCH, LLC

Wireless Product Development

W66 N220 Commerce Court • Cedarburg, WI 53012 USA • Phone: 262.375.4400 • Fax: 262.375.4248 • www.lsr.com

## ENGINEERING TEST REPORT # 313224

### LSR Job #: C-1790

#### RF Exposure Compliance of:

Caretaker Sentry Base Unit

#### Test Date(s):

August 28, September 5, 10, 11, 17, 27, and October 3, 4, 7, December 30, 2013 and January 8, 2014

#### Prepared For:


Logic Mark, LLC

Attn: Douglas L. Ringer

10106 Bluegrass Parkway

Louisville, Kentucky 40299

**This Test Report is issued under the Authority of:** Adam Alger, EMC Engineer

Signature:  Date: 01-15-2014

*This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.*

Prepared For: LogicMark, LLC.	Name: Caretaker Sentry Base Unit
Report: TR 313224 RFX	Model: 40914
LSR: C-1790	Serial: N/A (engineering sample)

## **Table of Contents**

i.	Title Page .....	1
ii.	Table of Contents .....	2
iii.	LS Research, LLC .....	3
1.0	Conformance Summary .....	4
2.0	SAR Test Exclusion Threshold.....	4
3.0	Equipment Under Test (EUT) Information.....	5
3.1	Product Description .....	5
3.2	Additional Information .....	5
4.0	RF Conducted Measurement Data.....	6
5.0	SAR Test Exclusion Calculation .....	7
6.0	Industry Canada Low Power Exemption .....	8

Prepared For: LogicMark, LLC.	Name: Caretaker Sentry Base Unit
Report: TR 313224 RFX	Model: 40914
LSR: C-1790	Serial: N/A (engineering sample)

## LS Research, LLC in Review

As an EMC Testing Laboratory, our Accreditation and Assessments are recognized through the following:

---



TESTING CERT #1255.01

A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025: 2005 with Electrical (EMC) Scope of Accreditation  
A2LA Certificate Number: 1255.01

---



Federal Communications Commission (FCC) – USA

Listing of 3 Meter Semi-Anechoic Chamber based on Title 47 CFR – Part 2.948  
FCC Registration Number: 90756

---



Industry Canada

On file, 3 Meter Semi-Anechoic Chamber based on RSS-212 – Issue 1

File Number: IC 3088-A

On file, 3 and 10 Meter OATS based on RSS-212 – Issue 1

File Number: IC 3088

---



U. S. Conformity Assessment Body (CAB) Validation

Validated by the European Commission as a U. S. Competent Body operating under the U. S./EU, Mutual Recognition Agreement (MRA) operating under the European Union Electromagnetic Compatibility –Council Directive 2004/108/EC (formerly 89/336/EEC, Article 10.2).

Date of Validation: January 16, 2001

Validated by the European Commission as a U.S. Notified Body operating under the U.S. /EU, Mutual Recognition Agreement (MRA) operating under the European Union

Telecommunication Equipment – Council Directive 99/5/EC, Annex V.

Date of Validation: November 20, 2002

Notified Body Identification Number: 1243

Prepared For: LogicMark, LLC.	Name: Caretaker Sentry Base Unit
Report: TR 313224 RFX	Model: 40914
LSR: C-1790	Serial: N/A (engineering sample)

## 1.0 Conformance Summary

The EUT was found to MEET the 5mm minimum test separation distance threshold for SAR test exclusion per FCC §2.1091(mobile) and §2.1093(portable) using methods of FCC KDB 447498 D01 General RF Exposure Guidance v05r01 as a standalone device.

## 2.0 SAR Test Exclusion Threshold

SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm

1-g SAR test exclusion threshold equation:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0$$

10-g SAR test exclusion threshold equation:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 7.5$$

Prepared For: LogicMark, LLC.	Name: Caretaker Sentry Base Unit
Report: TR 313224 RFX	Model: 40914
LSR: C-1790	Serial: N/A (engineering sample)
Page 4 of 9	

### **3.0 Equipment Under Test (EUT) Information**

*The following information has been supplied by the applicant.*

Product Name:	Caretaker Sentry Base Unit
Model Number:	40914
Serial Number:	N/A (Engineering Sample)
FCC ID	TYD-CS40914
IC Number	8471A-CS40914

#### **3.1 Product Description**

EUT uses two integral antennas for diversity with a maximum 3.0 dBi peak gain. EUT fitted with a temporary connection (U.FL) for RF Conducted measurements.

EUT utilizes 5 RF Channels (1921.536-1928.448 MHz) with 6 timeslots for 30 TDMA Duplex Channels

#### **3.2 Additional Information**

EUT was programmed into continuous transmit via hyper-terminal commands for RF tests. Normal mode of operation achieved with companion device for spectrum etiquette tests.


Prepared For: LogicMark, LLC.	Name: Caretaker Sentry Base Unit
Report: TR 313224 RFX	Model: 40914
LSR: C-1790	Serial: N/A (engineering sample)

## 4.0 RF Conducted Measurement Data


### Table

Frequency (MHz)	Power Antenna 0 (dBm)	Power Antenna 1 (dBm)
1921.536	18.74	18.94
1924.992	18.99	19.18
1928.448	19.23	19.45

### Plots

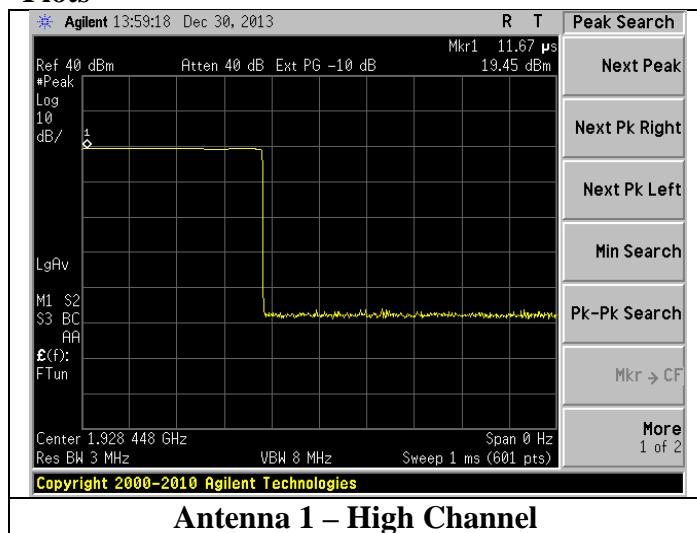

### Duty Cycle

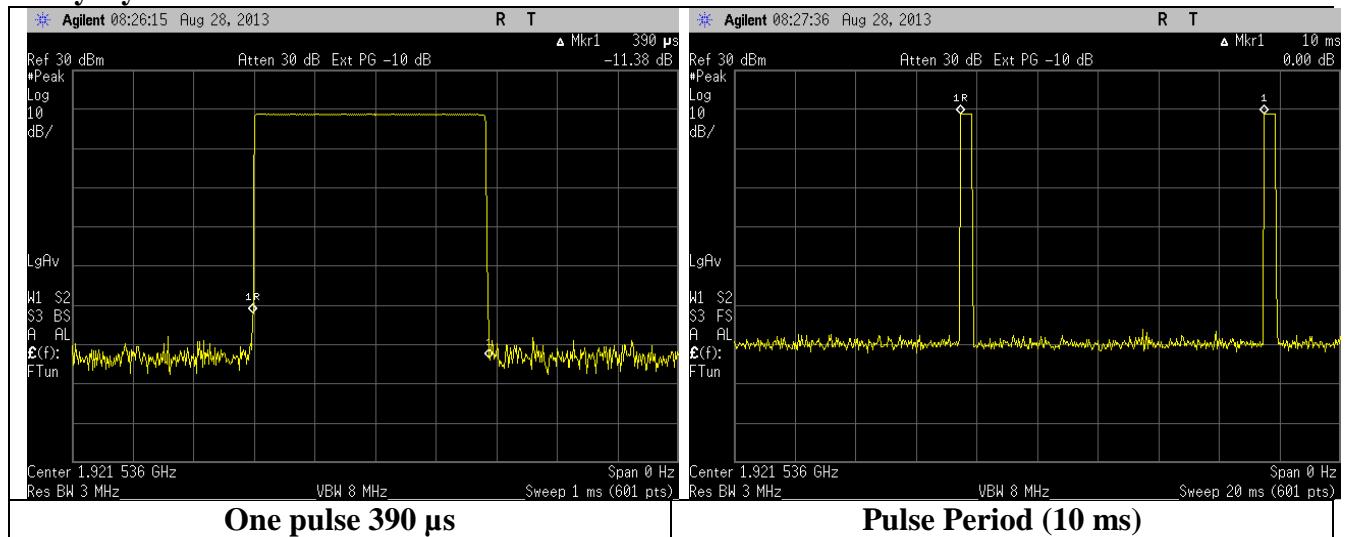

Prepared For: LogicMark, LLC.

Report: TR 313224 RFX

LSR: C-1790

Name: Caretaker Sentry Base Unit

Model: 40914

Serial: N/A (engineering sample)

## 5.0 SAR Test Exclusion Calculation

Description	Line #	Data	Unit	Additional Description
Transmit Packet on time:	1	0.39	(ms)	Worst case
Packet repetition time:	2	10	(ms)	Worst case
Duty factor:	3	0.039		Transmit Packet on time / Packet repetition time (1/2)
Maximum peak output power at antenna input terminal:	4	19.45	(dBm)	Measured worst case
Antenna gain:	5	3	(dBi)	Antenna gain (supplied by applicant)
Maximum peak radiated power:	6	22.450	(dBm)	Antenna terminal measured power + antenna gain (4+5)
Maximum peak radiated power:	7	175.792	(mW)	dBm to mW conversion
Prediction distance:	8	5	(mm)	Minimum test separation distance
Prediction frequency:	9	1.928448	(GHz)	Measured frequency
Square root of frequency (GHz):	10	1.388686		Calculation
Duty factor applied to maximum peak radiated power (mW):	11	6.855902	(mW)	duty factor * maximum peak radiated power (11*7)
Source based power (mW) / min test separation distance (mm):	12	1.37118		Calculation (11/8)
SAR exclusion calculation:	13	1.90		Calculation (12*10)
Threshold:	14	3		
Margin:	15	1.10		Calculation (14-13)

Prepared For: LogicMark, LLC.	Name: Caretaker Sentry Base Unit
Report: TR 313224 RFX	Model: 40914
LSR: C-1790	Serial: N/A (engineering sample)

## 6.0 Industry Canada Low Power Exemption

RSS 102 Section 2.5 states that all transmitters that meet the output power requirements as stated in section 2.5.1 and 2.5.2 of RSS 102 are exempt from routine SAR and RF exposure evaluation.

### **Output Power Evaluation.**

Evaluation Frequency = 1928.448 MHz

Device Operation separation distance:  $\leq 20\text{cm}$

Maximum Effective Isotropic Radiated Power (dBm) =  $19.45\text{ dBm} + 3.0\text{dBi} = 22.45\text{ dBm}$

Maximum Effective Isotropic Radiated Power (mW) =  $\log^{-1}(\text{EIRP(dBm)/10}) = 175\text{ mW}$

Duty cycle (source-based, time-averaged) =  $390\mu\text{s}/10\text{ms} = 0.039 * 118\text{ mW} = 6.85\text{ mW}$

Section 2.5.2 general public use limit at for devices operating less than 20cm:

Frequency	Limit
1 to 2.2 GHz	100 mW

Conclusion:

Since the maximum effective radiated power (ERP) is less than the applicable section limit, the Product is exempt from SAR/RF Evaluation

Prepared For: LogicMark, LLC.	Name: Caretaker Sentry Base Unit
Report: TR 313224 RFX	Model: 40914
LSR: C-1790	Serial: N/A (engineering sample)
Page 8 of 9	

## **END OF REPORT**

<b>Date</b>	<b>Version</b>	<b>Comments</b>	<b>Person</b>
11-6-13	V0	Final	Adam A
01-15-14	V1	Update power measurement	Adam A

Prepared For: LogicMark, LLC.	Name: Caretaker Sentry Base Unit
Report: TR 313224 RFX	Model: 40914
LSR: C-1790	Serial: N/A (engineering sample)
<b>Page 9 of 9</b>	