

## #01\_GSM850\_GPRS (4 Tx slots)\_Right Cheek\_0mm\_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL\_850\_240508 Medium parameters used:  $f=836.400$  MHz;  $\sigma=0.926$  S/m;  $\epsilon_r=42.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.35, 9.19, 10.14); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.119 W/kg; SAR (10g) = 0.082 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.11 dB

SAR (1g) = 0.126 W/kg; SAR (8g) = 0.102 W/kg; SAR (10g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 96.5 %

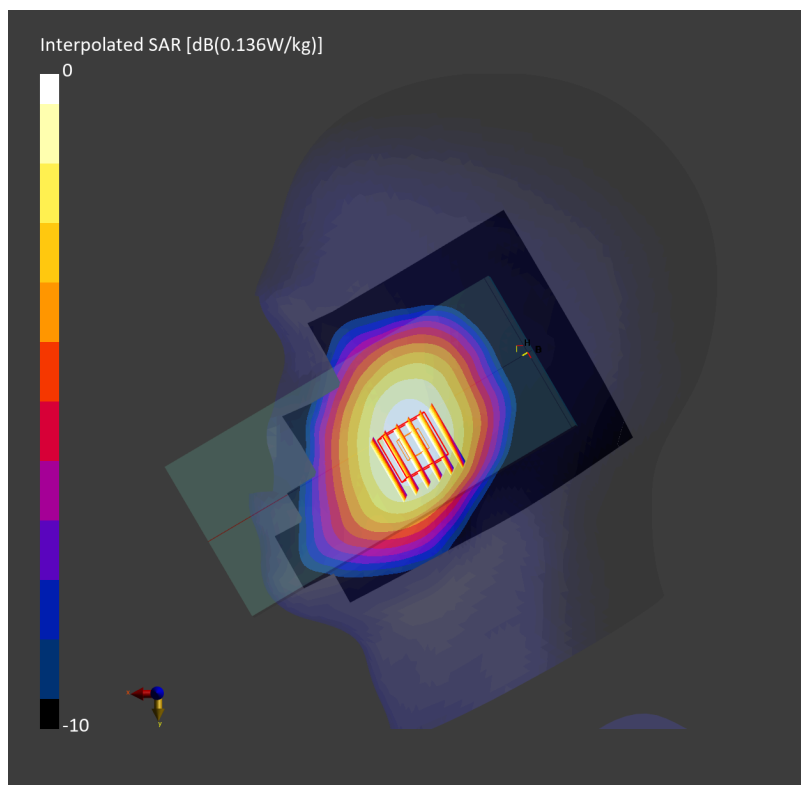

## #02\_GSM1900\_GPRS (4 Tx slots)\_Right Cheek\_0mm\_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz

Medium: HSL\_1900\_240509 Medium parameters used:  $f=1880.000$  MHz;  $\sigma=1.41$  S/m;  $\epsilon_r=39.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.0, 8.07, 8.72); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.128 W/kg; SAR (10g) = 0.074 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.143 W/kg; SAR (8g) = 0.097 W/kg; SAR (10g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below = 14.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.7 %

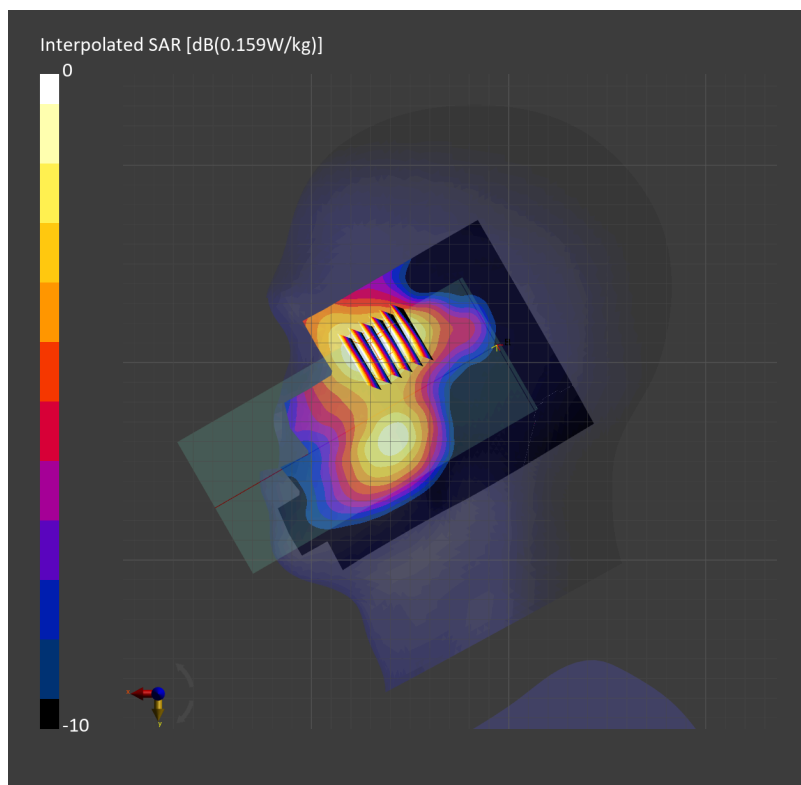

### #03\_WCDMA II\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch9262

Communication System: UMTS-FDD ; Frequency: 1852.400 MHz

Medium: HSL\_1900\_240509 Medium parameters used:  $f=1852.400$  MHz;  $\sigma=1.38$  S/m;  $\epsilon_r=39.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

#### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.0, 8.07, 8.72); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.113 W/kg; SAR (10g) = 0.065 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.118 W/kg; SAR (8g) = 0.079 W/kg; SAR (10g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

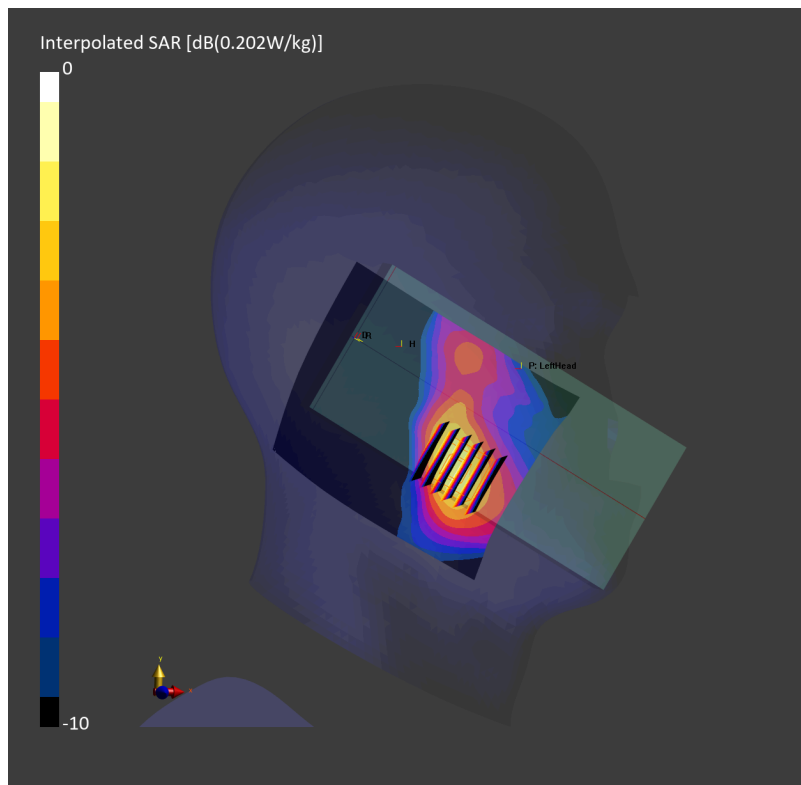

## #04\_WCDMA IV\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch1513


Communication System: UMTS-FDD; Frequency: 1752.600 MHz  
Medium: HSL\_1750\_240509 Medium parameters used:  $f=1752.600$  MHz;  $\sigma=1.35$  S/m;  $\epsilon_r=40.7$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.66, 8.71, 9.35); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.208 W/kg; SAR (10g) = 0.126 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.05 dB  
SAR (1g) = 0.233 W/kg; SAR (8g) = 0.161 W/kg; SAR (10g) = 0.153 W/kg  
Smallest distance from peaks to all points 3 dB below = 12.4 mm  
Ratio of SAR at M2 to SAR at M1 = 89.1 %

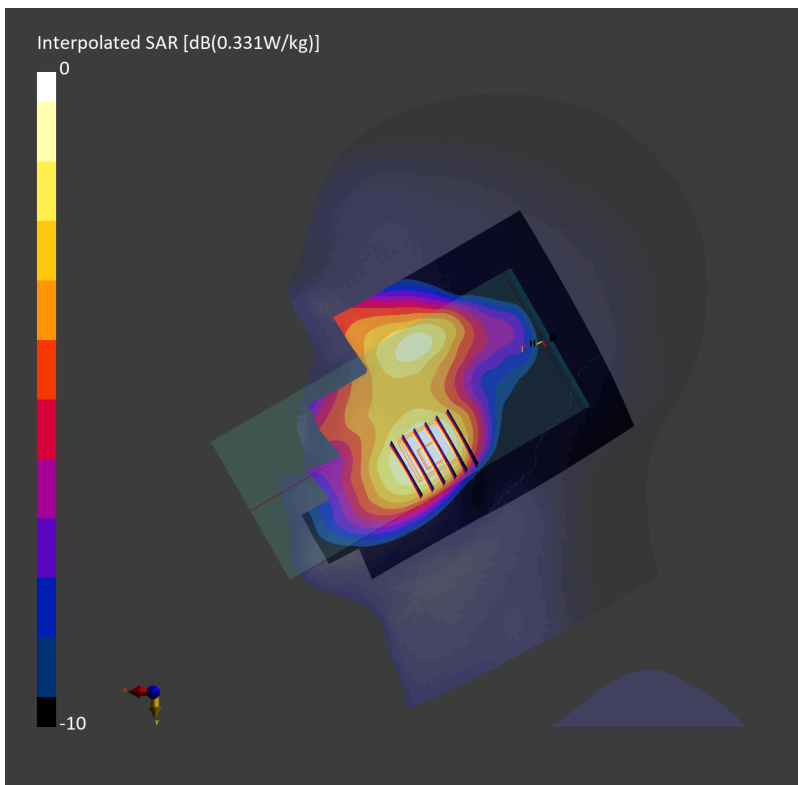

## #05\_WCDMA V\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch4233


Communication System: UMTS-FDD; Frequency: 846.600 MHz  
Medium: HSL\_850\_240508 Medium parameters used:  $f=846.600$  MHz;  $\sigma=0.929$  S/m;  $\epsilon_r=42.1$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.35, 9.19, 10.14); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.413 W/kg; SAR (10g) = 0.282 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.15 dB  
SAR (1g) = 0.443 W/kg; SAR (8g) = 0.358 W/kg; SAR (10g) = 0.346 W/kg  
Smallest distance from peaks to all points 3 dB below = > 15.0 mm  
Ratio of SAR at M2 to SAR at M1 = 96.1 %

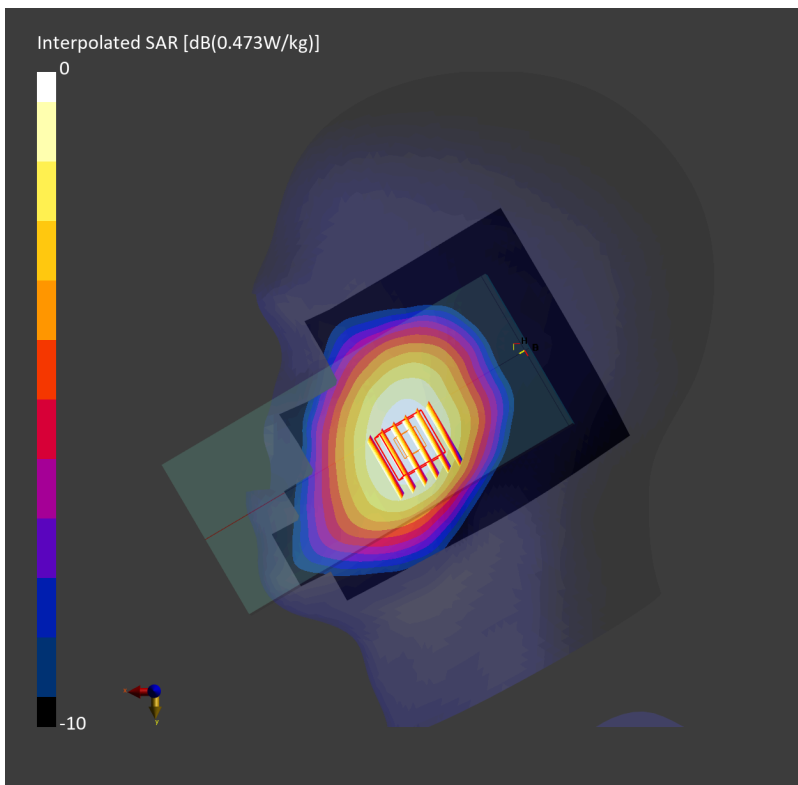

## #06\_LTE Band 7\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch21100

Communication System: LTE-FDD ; Frequency: 2535.000 MHz

Medium: HSL\_2600\_240510 Medium parameters used:  $f=2535.000$  MHz;  $\sigma=1.90$  S/m;  $\epsilon_r=38.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.5, 7.6, 8.24); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10100-CAF

**Area Scan (120.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.027 W/kg; SAR (10g) = 0.013 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.021 W/kg; SAR (8g) = 0.011 W/kg; SAR (10g) = 0.010 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

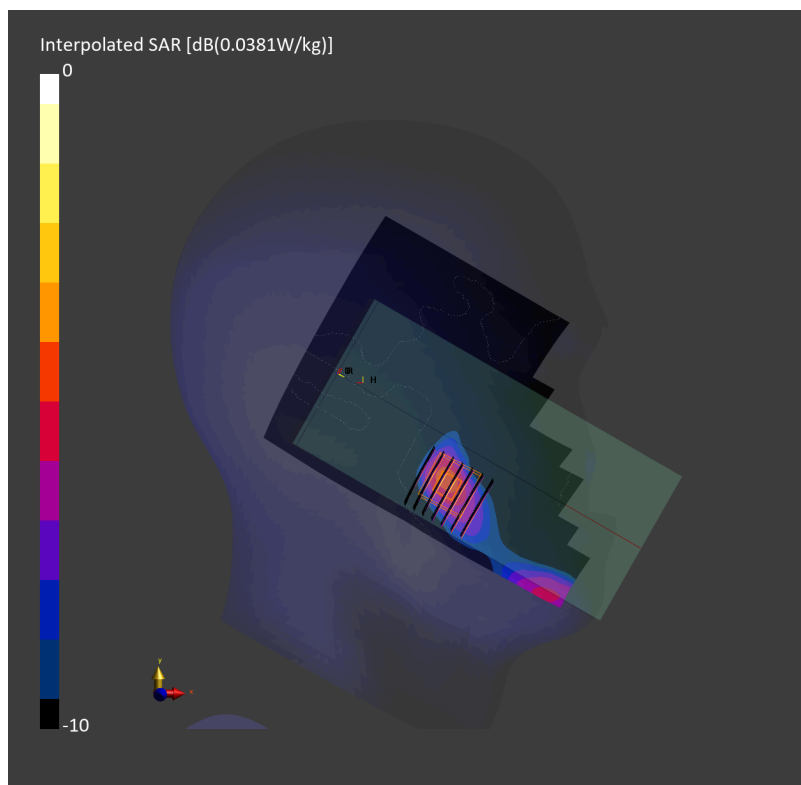

## #07\_LTE Band 12\_10M\_QPSK\_1\_0\_Right Cheek\_0mm\_Ch23095

Communication System: LTE-FDD ; Frequency: 707.500 MHz

Medium: HSL\_750\_240508 Medium parameters used:  $f=707.500$  MHz;  $\sigma=0.879$  S/m;  $\epsilon_r=42.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.84, 9.43, 10.43); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10108-CAH

**Area Scan (120.0 mm x 150.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.256 W/kg; SAR (10g) = 0.178 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.274 W/kg; SAR (8g) = 0.226 W/kg; SAR (10g) = 0.218 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 97.3 %

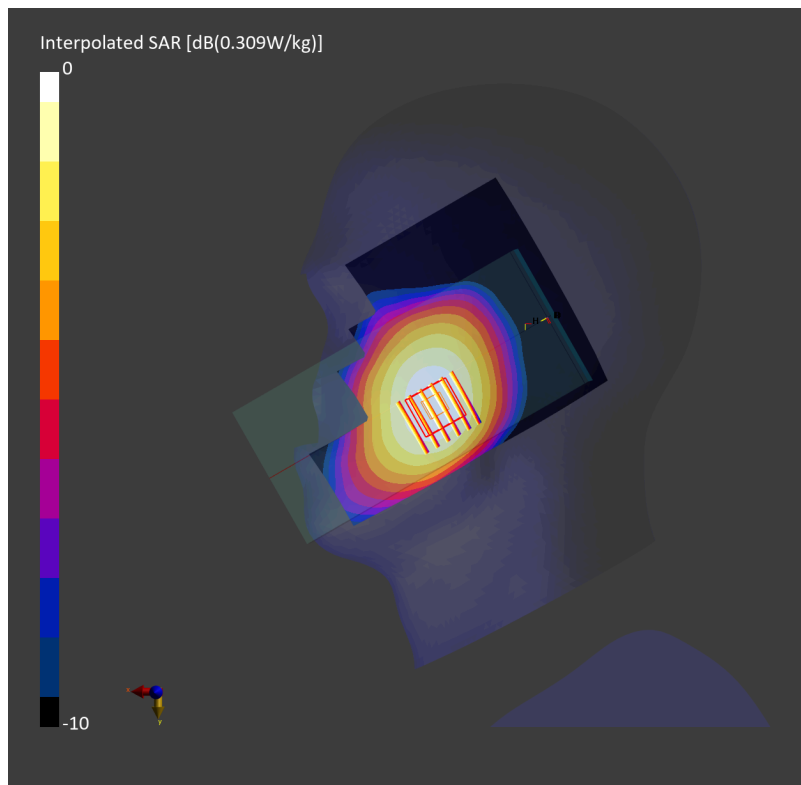

## #08\_LTE Band 13\_10M\_QPSK\_1\_0\_Right Cheek\_0mm\_Ch23230

Communication System: LTE-FDD ; Frequency: 782.000 MHz

Medium: HSL\_750\_240508 Medium parameters used:  $f=782.000$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=42.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.84, 9.43, 10.43); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10108-CAH

**Area Scan (120.0 mm x 150.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.278 W/kg; SAR (10g) = 0.192 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 0.299 W/kg; SAR (8g) = 0.245 W/kg; SAR (10g) = 0.236 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 97.1 %

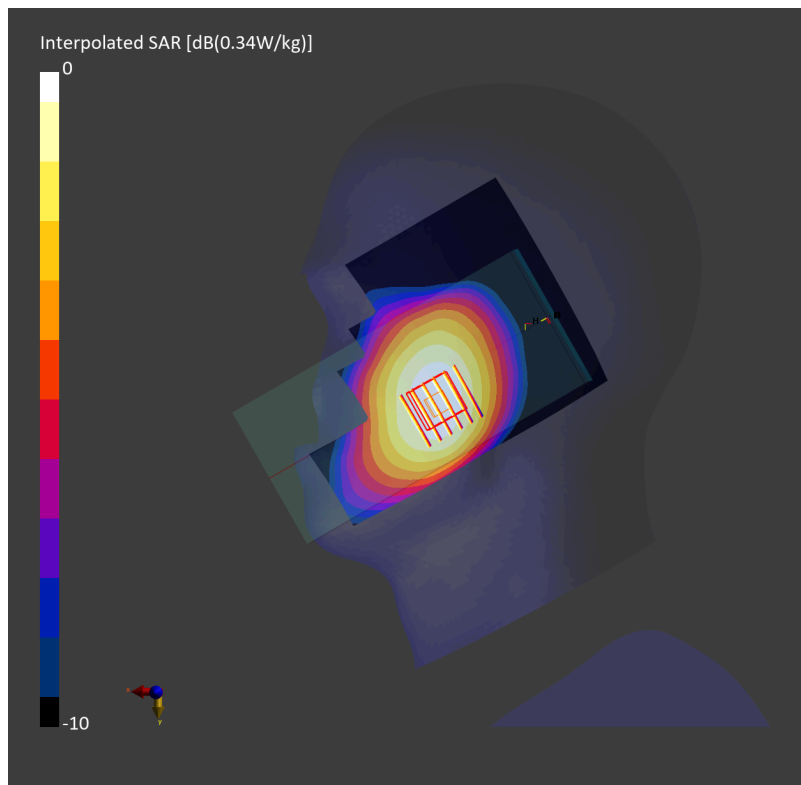



## #09\_LTE Band 14\_10M\_QPSK\_1\_0\_Right Cheek\_0mm\_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL\_750\_240508 Medium parameters used:  $f=793.000$  MHz;  $\sigma=0.908$  S/m;  $\epsilon_r=42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.84, 9.43, 10.43); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10108-CAH

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.252 W/kg; SAR (10g) = 0.174 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.277 W/kg; SAR (8g) = 0.228 W/kg; SAR (10g) = 0.221 W/kg

Smallest distance from peaks to all points 3 dB below = 25.1 mm

Ratio of SAR at M2 to SAR at M1 = 97.2 %

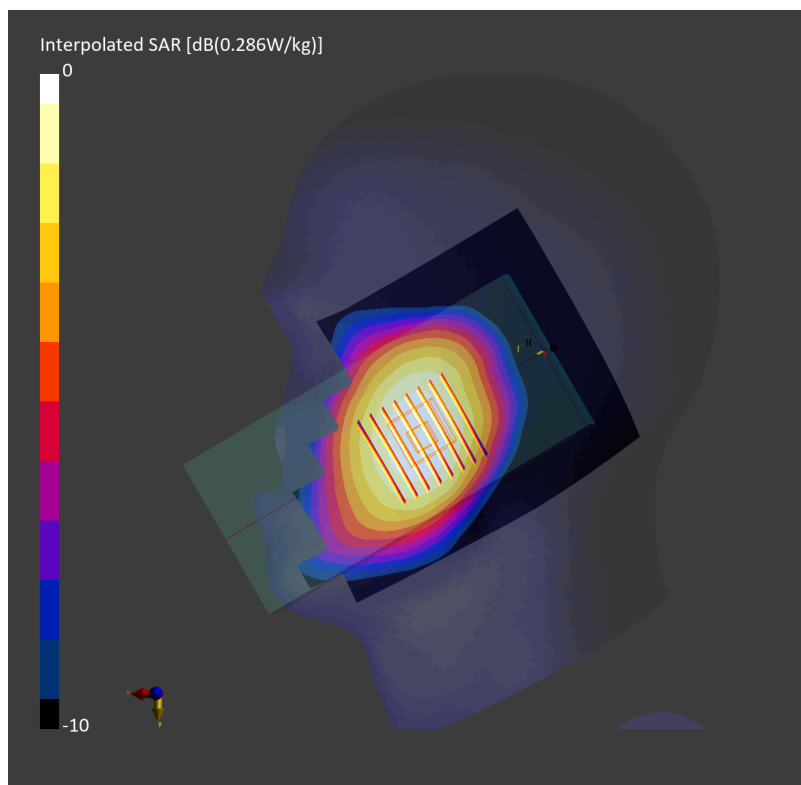

## #10\_LTE Band 25\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch26340

Communication System: LTE-FDD ; Frequency: 1880.000 MHz

Medium: HSL\_1900\_240509 Medium parameters used:  $f=1880.000$  MHz;  $\sigma=1.41$  S/m;  $\epsilon_r=39.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.0, 8.07, 8.72); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10100-CAF

**Area Scan (120.0 mm x 150.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.117 W/kg; SAR (10g) = 0.070 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.124 W/kg; SAR (8g) = 0.085 W/kg; SAR (10g) = 0.080 W/kg

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 89.8 %

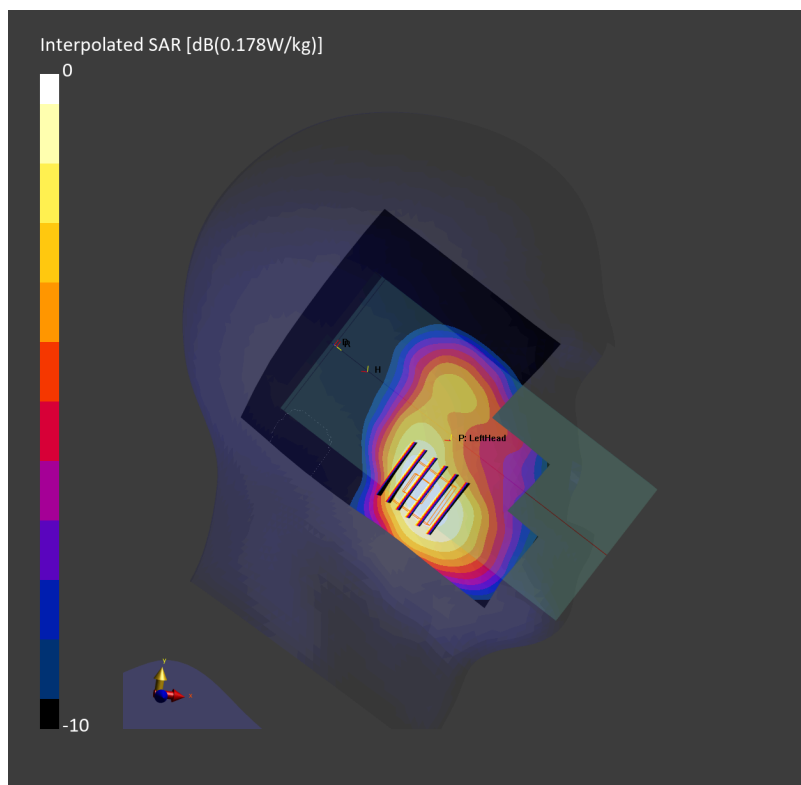

## #11\_LTE Band 26\_15M\_QPSK\_1\_0\_Right Cheek\_0mm\_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL\_850\_240508 Medium parameters used:  $f=831.500$  MHz;  $\sigma=0.924$  S/m;  $\epsilon_r=42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.35, 9.19, 10.14); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.316 W/kg; SAR (10g) = 0.216 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.334 W/kg; SAR (8g) = 0.274 W/kg; SAR (10g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 95.4 %

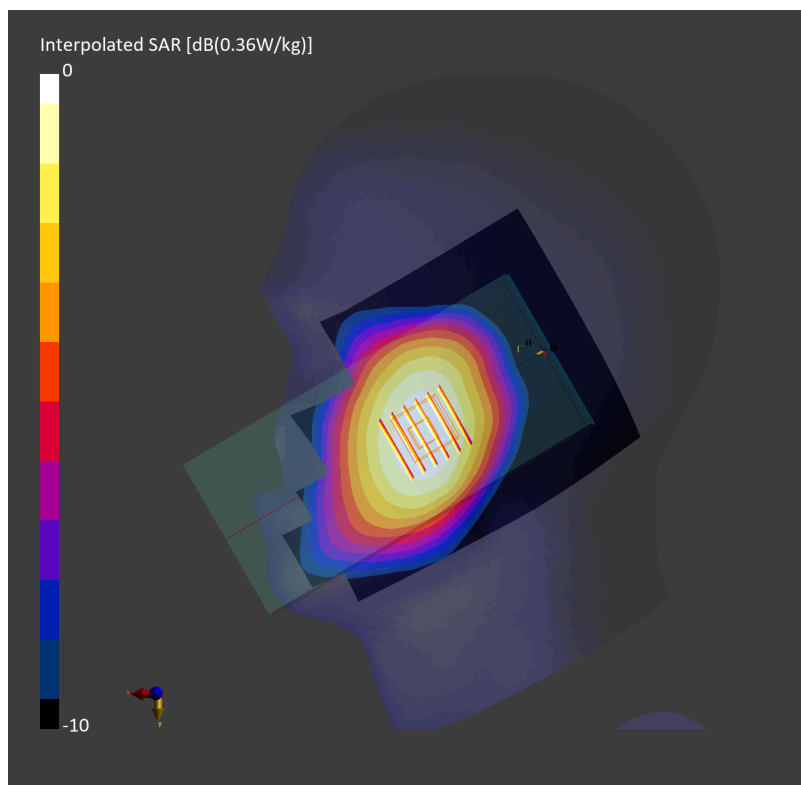

## #12\_LTE Band 30\_10M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch27710

Communication System: LTE-FDD ; Frequency: 2310.000 MHz

Medium: HSL\_2300\_240511 Medium parameters used:  $f=2310.000$  MHz;  $\sigma=1.69$  S/m;  $\epsilon_r=39.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.71, 7.81, 8.42); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10108-CAH

**Area Scan (120.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.099 W/kg; SAR (10g) = 0.052 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.105 W/kg; SAR (8g) = 0.063 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 89.3 %

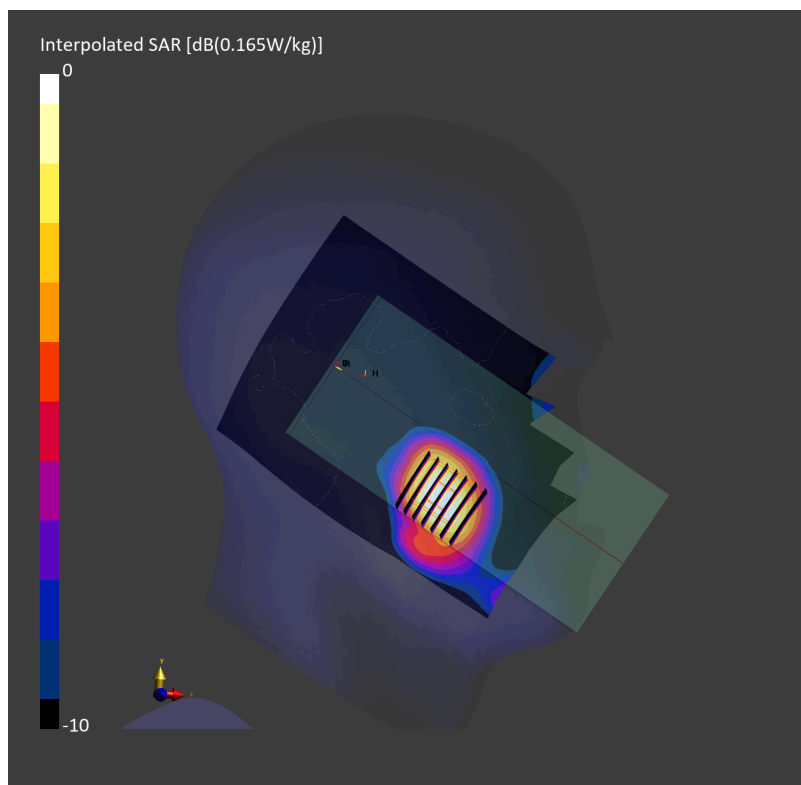

### #13\_LTE Band 66\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch132322

Communication System: LTE-FDD ; Frequency: 1745.000 MHz

Medium: HSL\_1750\_240509 Medium parameters used:  $f=1745.000$  MHz;  $\sigma=1.35$  S/m;  $\epsilon_r=40.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

#### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.66, 8.71, 9.35); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10100-CAF

**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.284 W/kg; SAR (10g) = 0.178 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 0.305 W/kg; SAR (8g) = 0.226 W/kg; SAR (10g) = 0.216 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 91.5 %

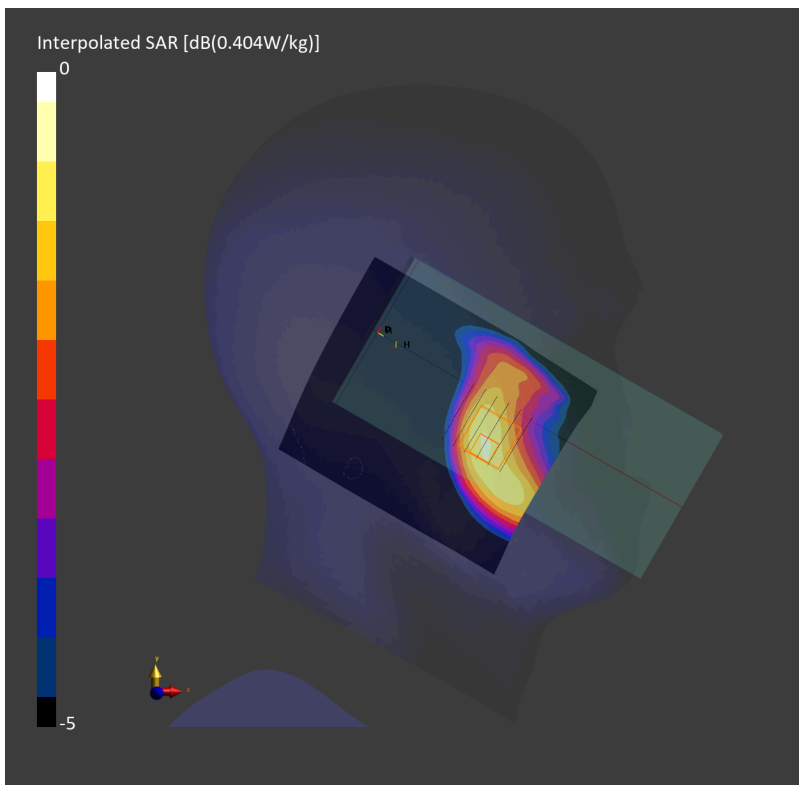

## #14\_LTE Band 41\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch40620

Communication System: LTE-TDD ; Frequency: 2593.000 MHz

Medium: HSL\_2600\_240510 Medium parameters used:  $f=2593.000$  MHz;  $\sigma=1.97$  S/m;  $\epsilon_r=38.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.5, 7.6, 8.24); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10103-CAH

**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.012 W/kg; SAR (10g) = 0.006 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.01 W/kg; SAR (8g) = 0.004 W/kg; SAR (10g) = 0.003 W/kg

Smallest distance from peaks to all points 3 dB below = 1.5 mm

Ratio of SAR at M2 to SAR at M1 = N/A %

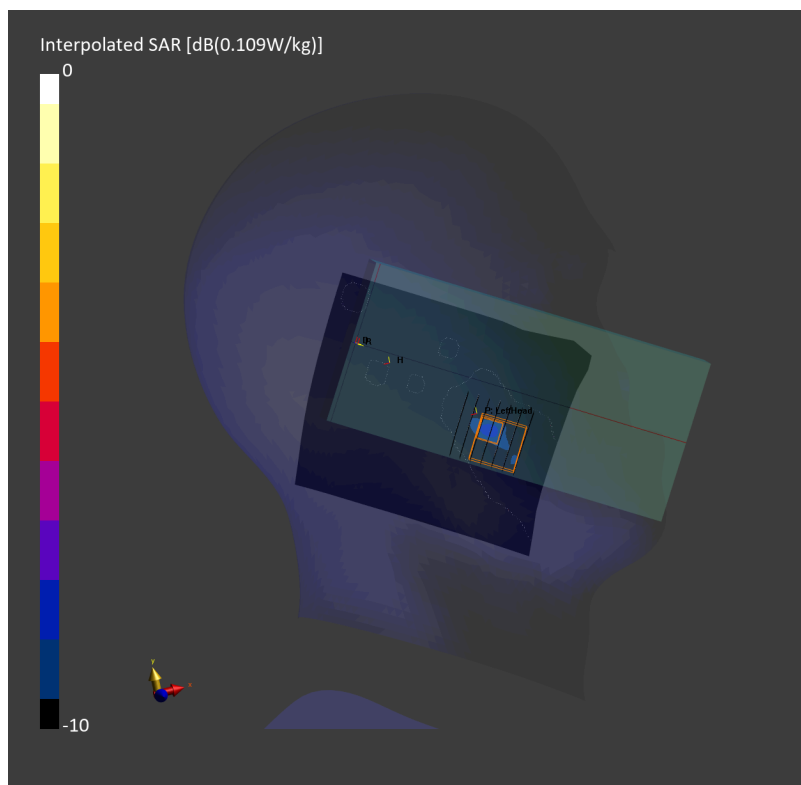

## #15\_LTE Band 48\_20M\_QPSK\_1\_0\_Right Cheek\_0mm\_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL\_3700\_240512 Medium parameters used:  $f=3641.000$  MHz;  $\sigma=3.11$  S/m;  $\epsilon_r=38.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(6.89, 7.01, 7.57); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.138 W/kg; SAR (10g) = 0.062 W/kg;


**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.143 W/kg; SAR (8g) = 0.071 W/kg; SAR (10g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

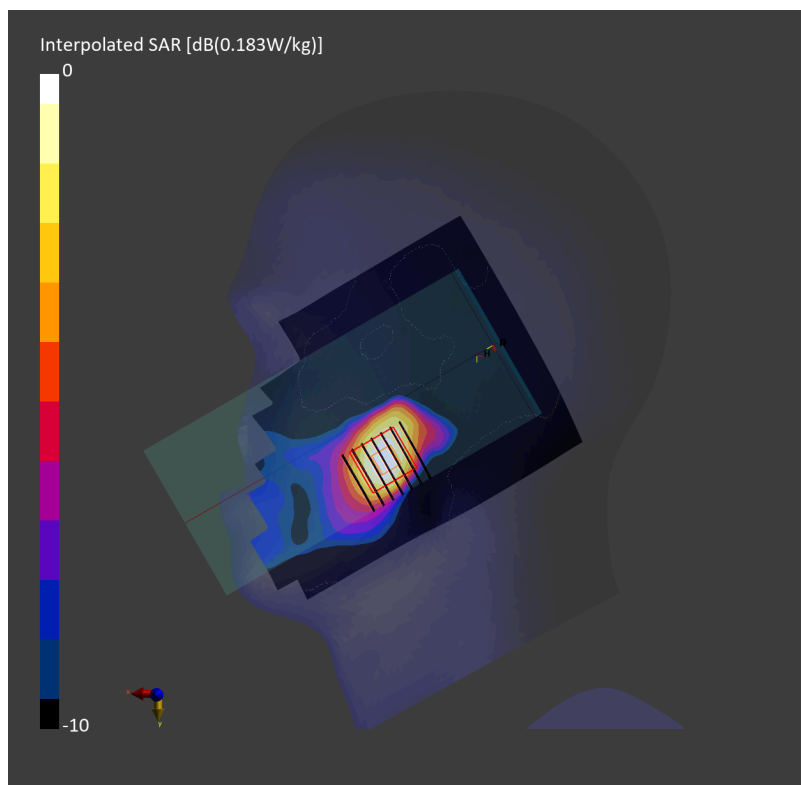

## #16\_FR1 n7\_20M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL\_2600\_240510 Medium parameters used:  $f = 2535.000$  MHz;  $\sigma = 1.90$  S/m;  $\epsilon_r = 38.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.5, 7.6, 8.24); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

**Area Scan (80.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.026 W/kg; SAR (10g) = 0.013 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.021 W/kg; SAR (8g) = 0.011 W/kg; SAR (10g) = 0.01 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

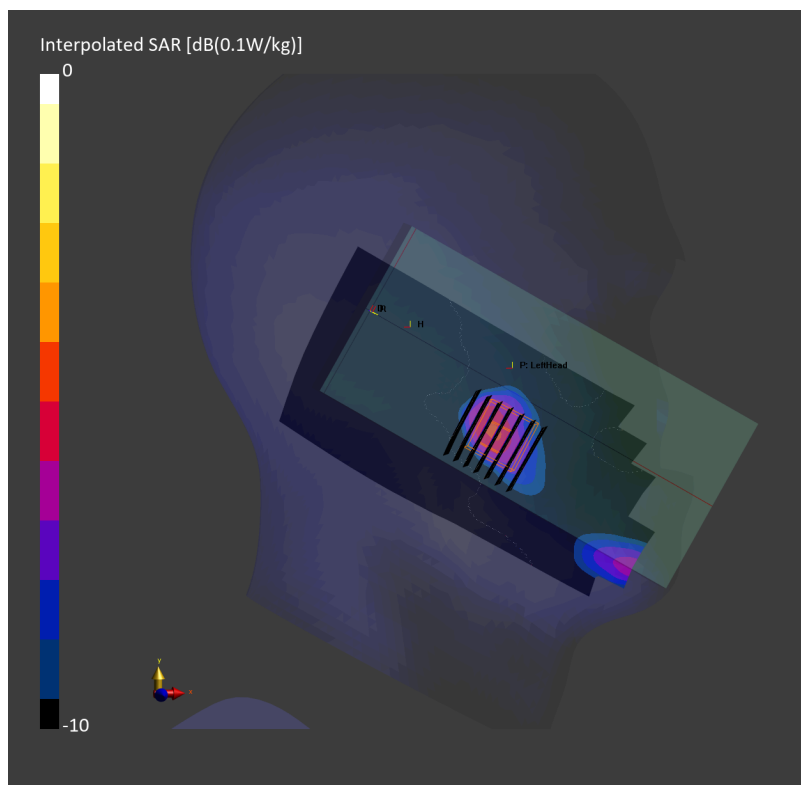



## #17\_FR1 n12\_15M\_BPSK\_1\_1\_Right Cheek\_0mm\_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL\_750\_240508 Medium parameters used:  $f=707.500$  MHz;  $\sigma=0.879$  S/m;  $\epsilon_r=42.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.84, 9.43, 10.43); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.209 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.320 W/kg; SAR (8g) = 0.266 W/kg; SAR (10g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 96.0 %

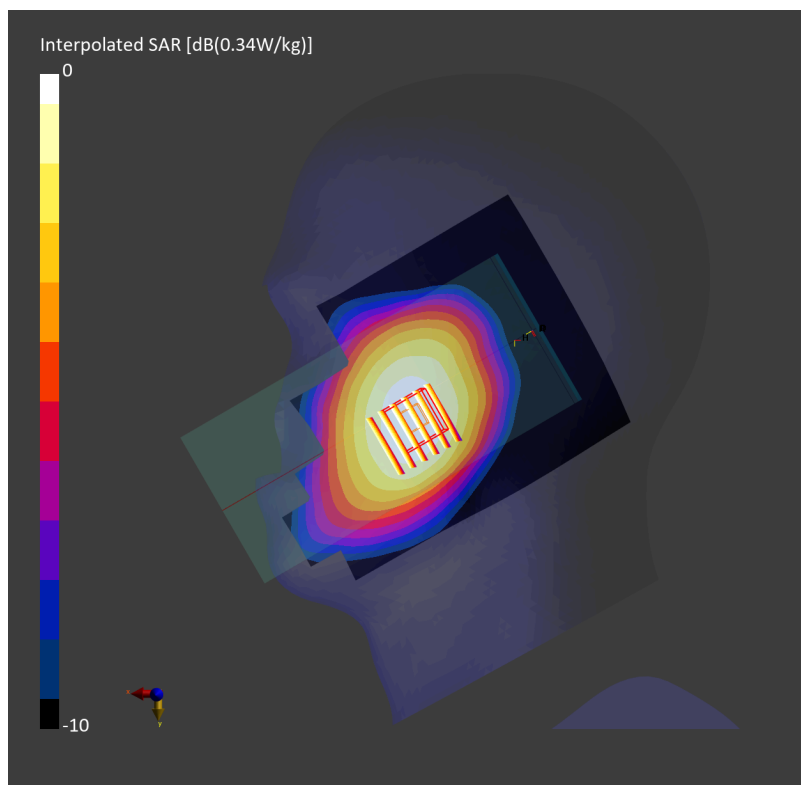

## #18\_FR1 n13\_10M\_BPSK\_1\_1\_Right Cheek\_0mm\_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL\_750\_240508 Medium parameters used:  $f=782.000$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=42.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.84, 9.43, 10.43); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.334 W/kg; SAR (10g) = 0.231 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.10 dB

SAR (1g) = 0.358 W/kg; SAR (8g) = 0.295 W/kg; SAR (10g) = 0.286 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 97.6 %

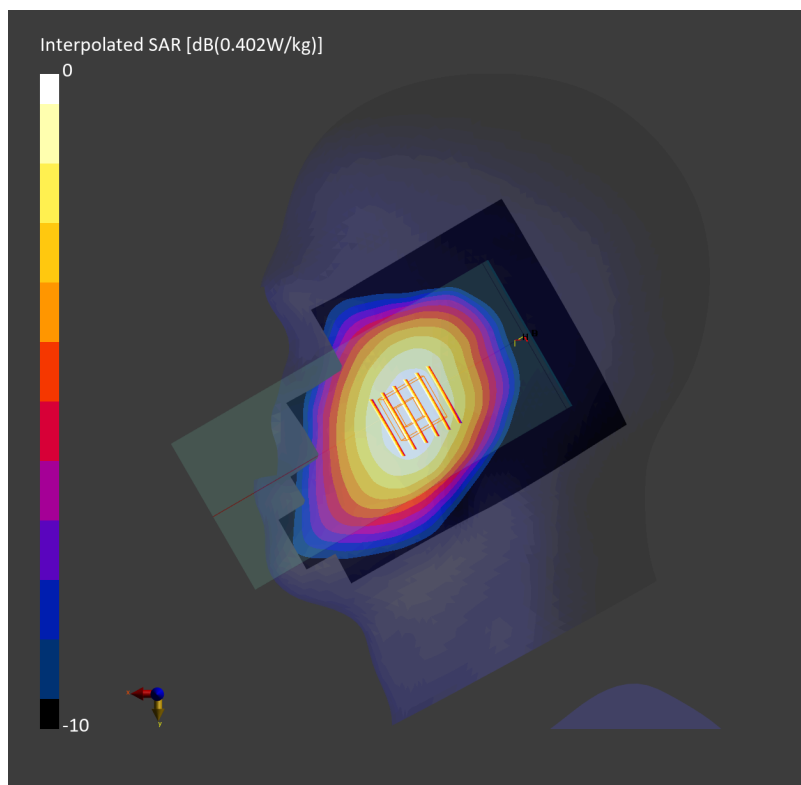

## #19\_FR1 n14\_10M\_BPSK\_1\_1\_Right Cheek\_0mm\_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL\_750\_240508 Medium parameters used:  $f=793.000$  MHz;  $\sigma=0.908$  S/m;  $\epsilon_r=42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.84, 9.43, 10.43); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.279 W/kg; SAR (10g) = 0.194 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.297 W/kg; SAR (8g) = 0.247 W/kg; SAR (10g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 98.2 %

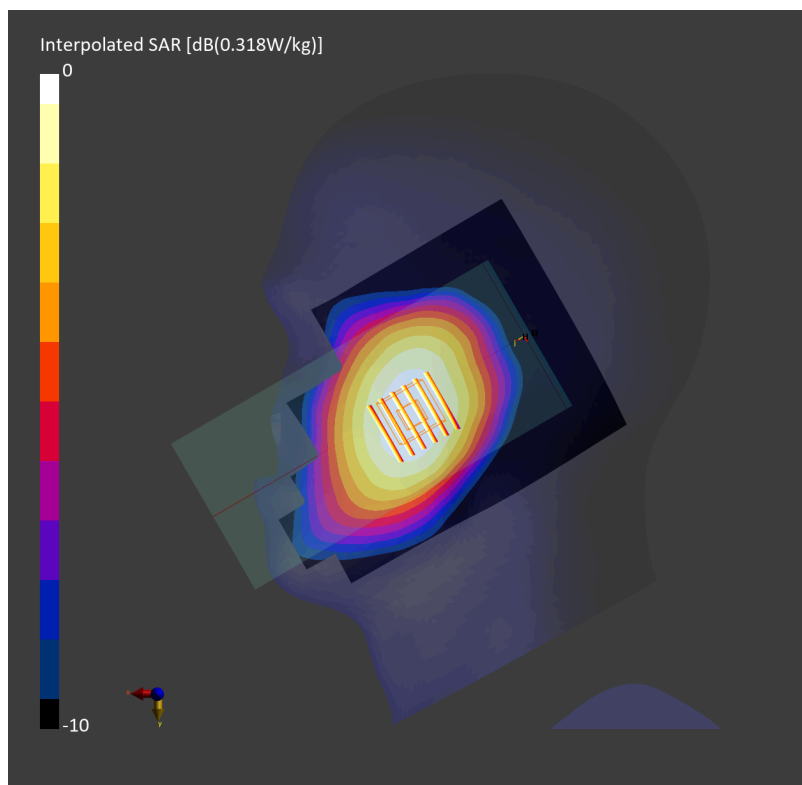

## #20\_FR1 n25\_30M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL\_1900\_240509 Medium parameters used:  $f=1882.500$  MHz;  $\sigma=1.41$  S/m;  $\epsilon_r=39.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.0, 8.07, 8.72); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10933-AAC

**Area Scan (90.0 mm x 150.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.109 W/kg; SAR (10g) = 0.064 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.121 W/kg; SAR (8g) = 0.081 W/kg; SAR (10g) = 0.076 W/kg

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 90.8 %

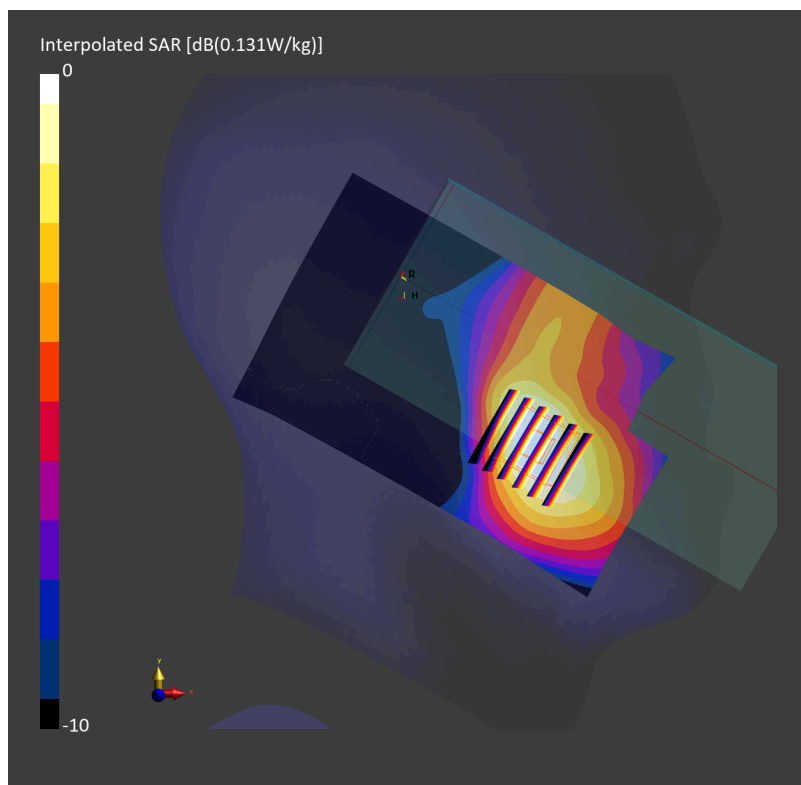

## #21\_FR1 n26\_20M\_BPSK\_1\_1\_Right Cheek\_0mm\_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL\_850\_240508 Medium parameters used:  $f=831.500$  MHz;  $\sigma=0.924$  S/m;  $\epsilon_r=42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.35, 9.19, 10.14); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.295 W/kg; SAR (10g) = 0.203 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.17 dB

SAR (1g) = 0.312 W/kg; SAR (8g) = 0.256 W/kg; SAR (10g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 98.0 %

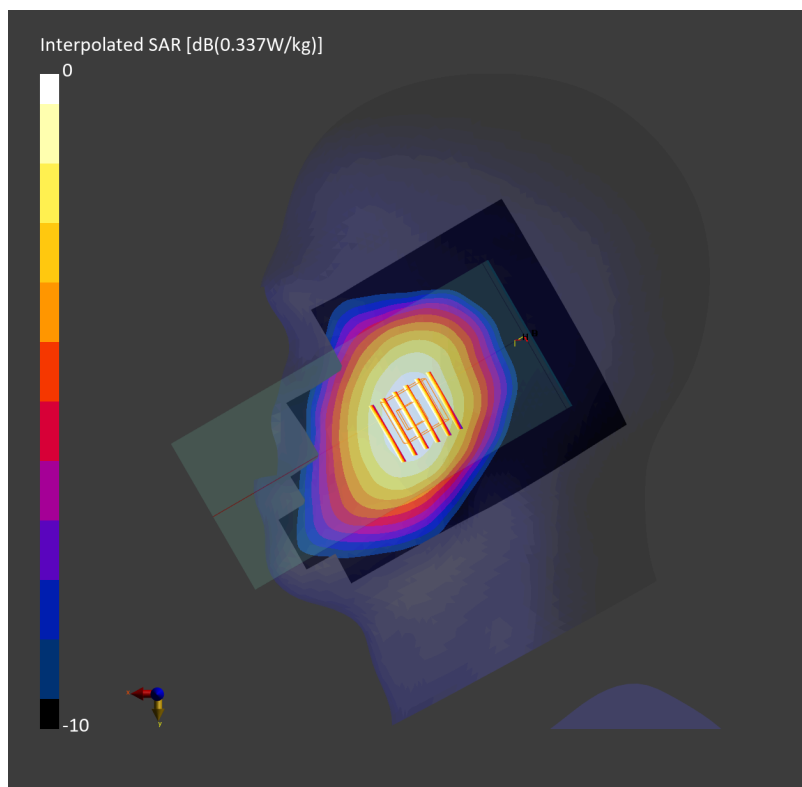

## #22\_FR1 n30\_10M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL\_2300\_240511 Medium parameters used:  $f=2310.000$  MHz;  $\sigma=1.69$  S/m;  $\epsilon_r=39.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.71, 7.81, 8.42); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

**Area Scan (80.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.099 W/kg; SAR (10g) = 0.053 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.109 W/kg; SAR (8g) = 0.066 W/kg; SAR (10g) = 0.061 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 88.5 %

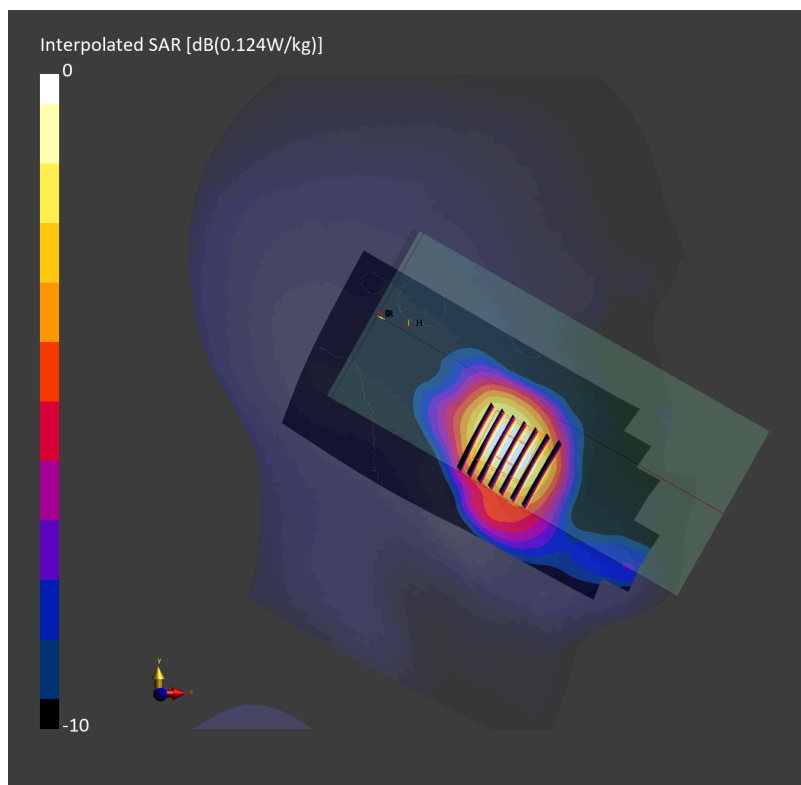

## #23\_FR1 n66\_30M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL\_1750\_240509 Medium parameters used:  $f=1745.000$  MHz;  $\sigma=1.35$  S/m;  $\epsilon_r=40.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.66, 8.71, 9.35); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10933-AAC

**Area Scan (90.0 mm x 150.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.270 W/kg; SAR (10g) = 0.164 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.19 dB

SAR (1g) = 0.289 W/kg; SAR (8g) = 0.206 W/kg; SAR (10g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 90.2 %

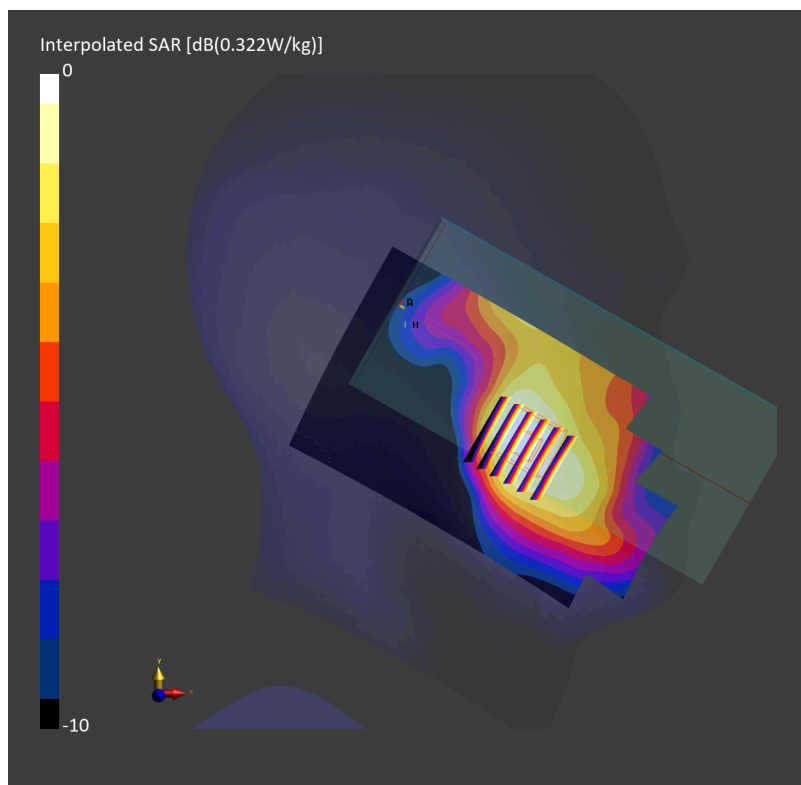

## #24\_FR1 n41\_100M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL\_2600\_240510 Medium parameters used:  $f=2592.990$  MHz;  $\sigma=1.97$  S/m;  $\epsilon_r=38.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.5, 7.6, 8.24); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

**Area Scan (80.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.030 W/kg; SAR (10g) = 0.015 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.029 W/kg; SAR (8g) = 0.016 W/kg; SAR (10g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

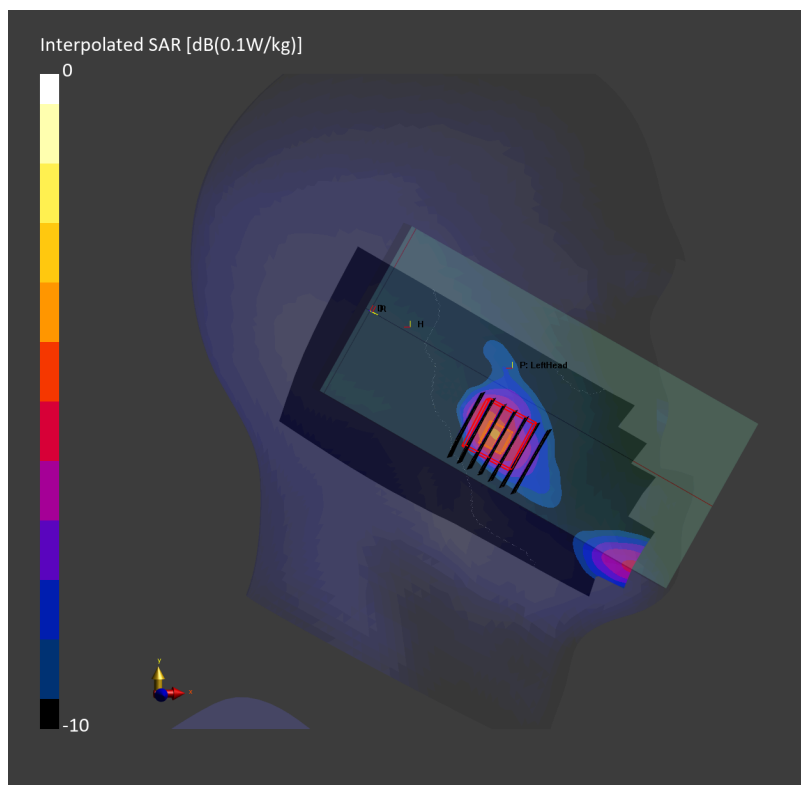



#25\_FR1 n48\_40M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch641666

Communication System: 5G NR; Frequency: 3624.985 MHz

Medium: HSL\_3700\_240512 Medium parameters used:  $f=3624.985$  MHz;  $\sigma=3.10$  S/m;  $\epsilon_r=38.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(6.89, 7.01, 7.57); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

**Area Scan (80.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.136 W/kg; SAR (10g) = 0.064 W/kg;


**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 0.155 W/kg; SAR (8g) = 0.080 W/kg; SAR (10g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

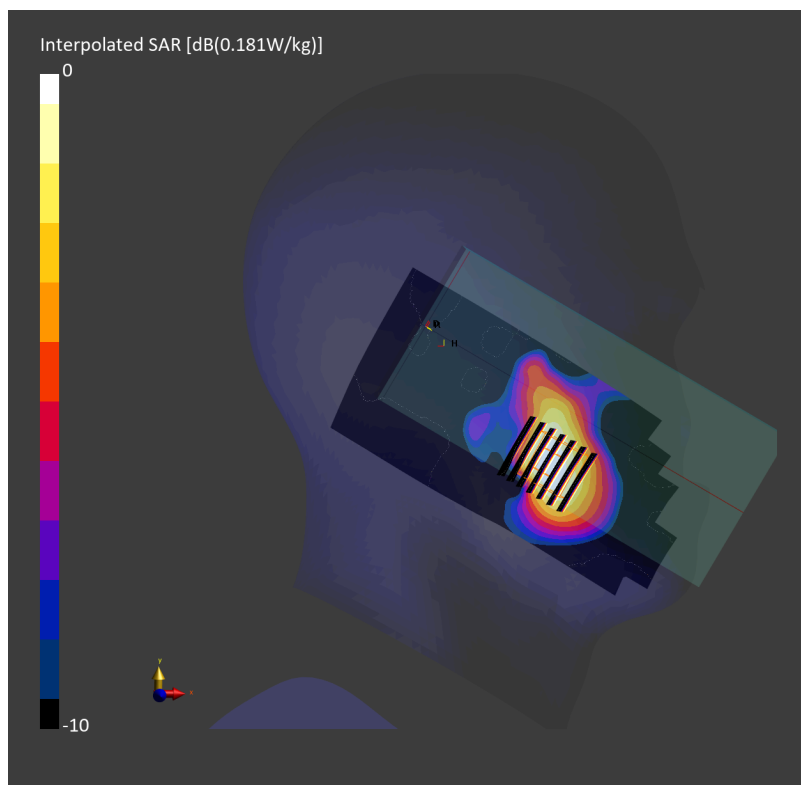

## #26\_FR1 n77\_100M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL\_3500\_240513 Medium parameters used:  $f=3499.980$  MHz;  $\sigma=2.94$  S/m;  $\epsilon_r=37.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.07, 7.19, 7.75); Calibrated: 2023-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.414 W/kg; SAR (10g) = 0.193 W/kg;


**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.431 W/kg; SAR (8g) = 0.226 W/kg; SAR (10g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

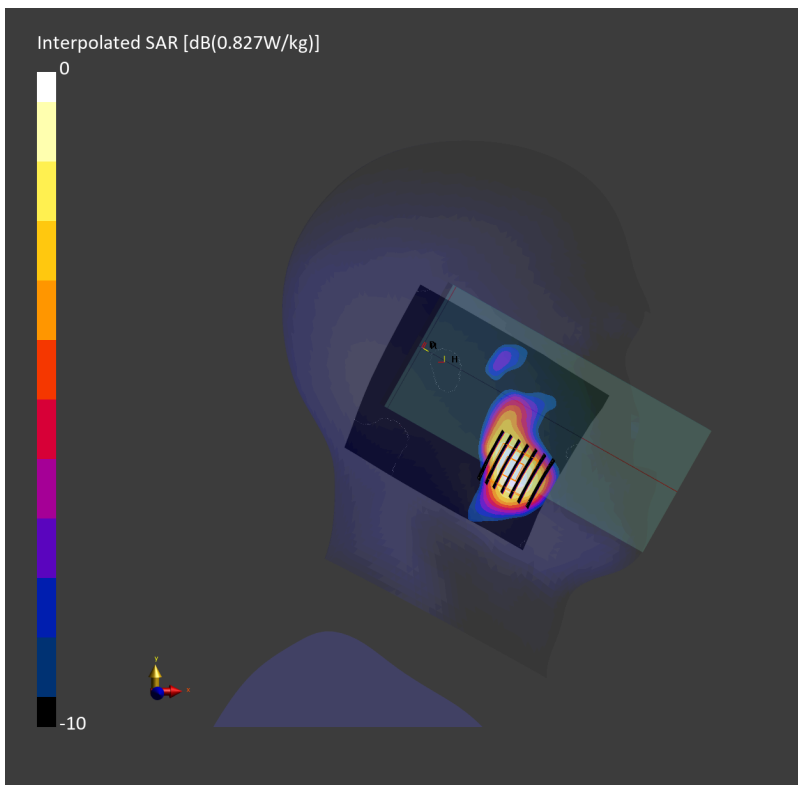

## #27\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_0mm\_Ch6


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz  
Medium: HSL\_2450\_240516 Medium parameters used:  $f=2437.000$  MHz;  $\sigma=1.84$  S/m;  $\epsilon_r=38.7$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.62, 7.62, 7.62); Calibrated: 2023-10-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2023-10-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

**Area Scan (120.0 mm x 100.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.367 W/kg; SAR (10g) = 0.183 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = 0.04 dB  
SAR (1g) = 0.371 W/kg; SAR (8g) = 0.197 W/kg; SAR (10g) = 0.180 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.9 mm  
Ratio of SAR at M2 to SAR at M1 = 77.2 %

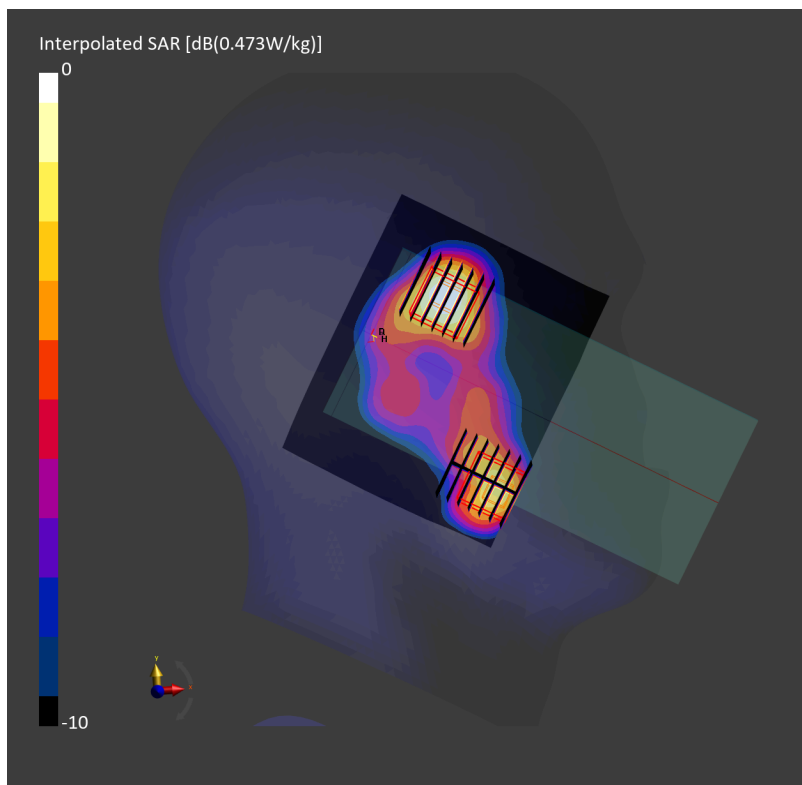

## #28\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_0mm\_Ch56


Communication System: IEEE 802.11a/h WiFi 5 GHz ; Frequency: 5280.000 MHz  
Medium: HSL\_5G\_240519 Medium parameters used:  $f=5280.000$  MHz;  $\sigma=4.68$  S/m;  $\epsilon_r=35.6$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.26, 5.26, 5.26); Calibrated: 2023-10-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2023-10-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

**Area Scan (140.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.262 W/kg; SAR (10g) = 0.100 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.02 dB  
SAR (1g) = 0.293 W/kg; SAR (8g) = 0.119 W/kg; SAR (10g) = 0.104 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.1 mm  
Ratio of SAR at M2 to SAR at M1 = 66.3 %

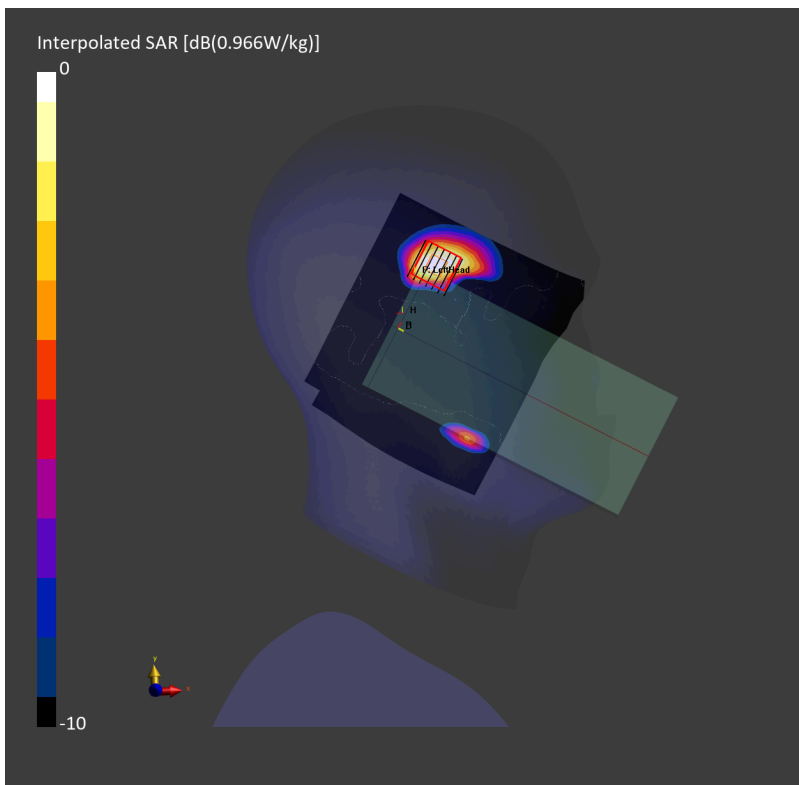

## #29\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_0mm\_Ch144


Communication System: IEEE 802.11a/h WiFi 5 GHz ; Frequency: 5720.000 MHz  
Medium: HSL\_5G\_240519 Medium parameters used:  $f=5720.000$  MHz;  $\sigma=5.18$  S/m;  $\epsilon_r=34.8$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.8, 4.8, 4.8); Calibrated: 2023-10-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2023-10-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

**Area Scan (140.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.297 W/kg; SAR (10g) = 0.110 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.08 dB  
SAR (1g) = 0.336 W/kg; SAR (8g) = 0.131 W/kg; SAR (10g) = 0.116 W/kg  
Smallest distance from peaks to all points 3 dB below = 7.4 mm  
Ratio of SAR at M2 to SAR at M1 = 64.5 %

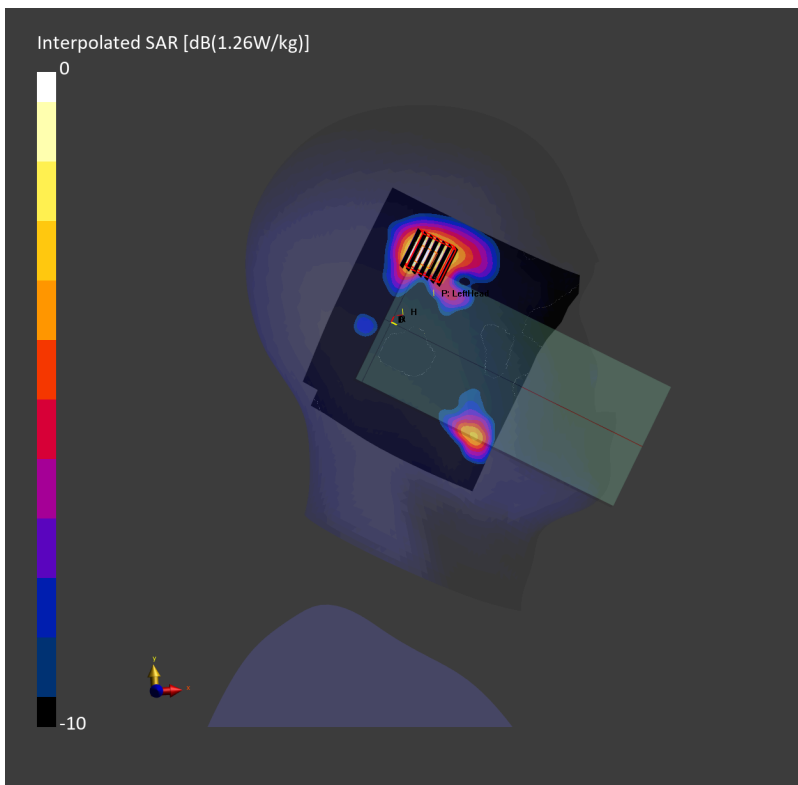

## #30\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_0mm\_Ch157


Communication System: IEEE 802.11a/h WiFi 5 GHz ; Frequency: 5785.000 MHz  
Medium: HSL\_5G\_240519 Medium parameters used:  $f=5785.000$  MHz;  $\sigma=5.26$  S/m;  $\epsilon_r=34.7$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

### DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.8, 4.8, 4.8); Calibrated: 2023-10-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2023-10-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

**Area Scan (140.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.383 W/kg; SAR (10g) = 0.130 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.07 dB  
SAR (1g) = 0.426 W/kg; SAR (8g) = 0.162 W/kg; SAR (10g) = 0.143 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.2 mm  
Ratio of SAR at M2 to SAR at M1 = 63.3 %

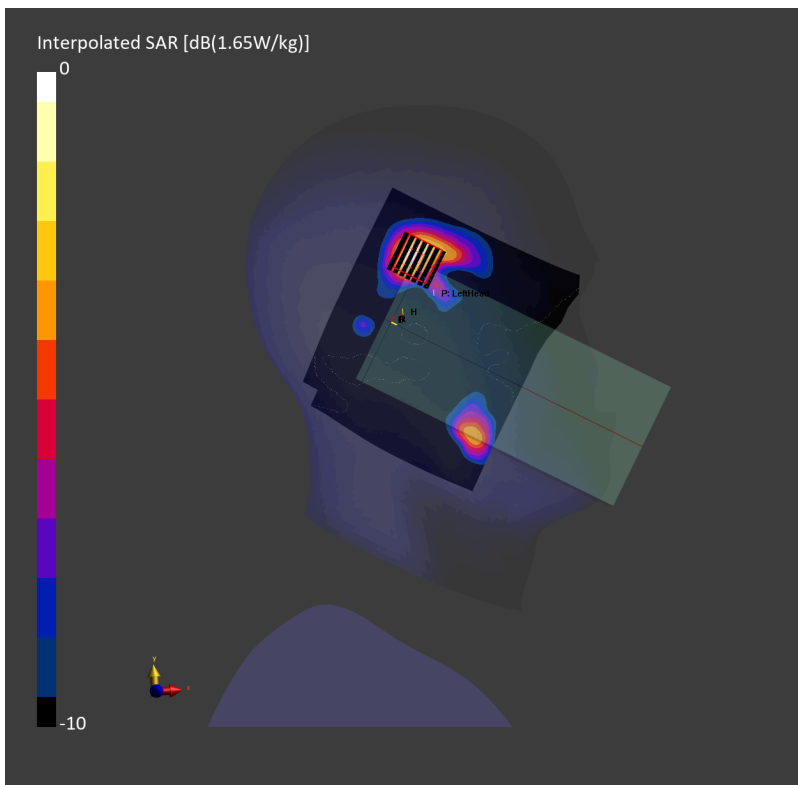

### #31\_WLAN5GHz\_802.11a 6Mbps\_Left Cheek\_0mm\_Ch173

Communication System: IEEE 802.11a; Frequency: 5865.000 MHz

Medium: HSL\_5G\_240520 Medium parameters used:  $f = 5865.000$  MHz;  $\sigma = 5.34$  S/m;  $\epsilon_r = 35.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

#### DASY8 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.37, 4.42, 4.46); Calibrated: 2024-03-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

**Area Scan (120.0 mm x 100.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.829 W/kg; SAR (10g) = 0.270 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.13 dB

SAR (1g) = 0.915 W/kg; SAR (8g) = 0.323 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.2 %

