

# Dynamic Frequency Selection (DFS)

## Test Report

Product Name	Portable Data Collection Terminal
Model No	MM3
FCC ID	U7X-MM3

Applicant	M3 Mobile Co., Ltd.
Address	DongWon B/D, 725-30, Yeoksam-dong, Gangnam-gu, Seoul, 135-080, Korea

Date of Receipt	July 30, 2009
Issued Date	Sep. 11, 2009
Report No.	098068S-D
Report Version	V1.0

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.  
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

## DFS Test Report

Issued Date: Sep. 11, 2009  
Report No.: 098068S-D

Product Name	Portable Data Collection Terminal
Applicant	M3 Mobile Co., Ltd.
Address	DongWon B/D, 725-30, Yeoksam-dong, Gangnam-gu, Seoul, 135-080, Korea
Manufacturer	M3 Mobile Co., Ltd.
Model No.	MM3
FCC ID.	U7X-MM3
Rated Voltage	AC 120V/60Hz
Working Voltage	AC 120V/60Hz
Trade Name	Hand Held Terminal
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E 15.407 (h): 2008 FCC 06-96
Test Result	Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By :

A handwritten signature in blue ink that appears to read 'Genie Chang'.

( Senior Adm. Specialist / Genie Chang )



Tested By :

A handwritten signature in blue ink that appears to read 'Tom Hsieh'.

( Vice Supervisor / Tom Hsieh )

Approved By :

A handwritten signature in blue ink that appears to read 'Vincent Lin'.

( Manager / Vincent Lin )



---

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. EUT Description.....	4
1.2. Standard Requirement .....	6
1.3. UNII Device Description.....	6
1.4. Test Equipment.....	7
1.5. Test Setup .....	7
1.6. Limits .....	8
1.7. Radar Waveform Calibration.....	11
1.8. Radar Waveform Calibration Result.....	12
<b>2. Channel Move Time and Channel Closing Transmission Time .....</b>	<b>14</b>
2.1. Test Procedure .....	14
2.2. Test Requirement.....	14
2.3. Uncertainty .....	14
2.4. Test Result of Channel Move Time.....	15
<b>3. Non-Occupancy Period .....</b>	<b>19</b>
3.1. Test Procedur .....	19
3.2. Test Requirement.....	19
3.3. Uncertainty .....	19
<b>4. Test Result of Non-Occupancy Period .....</b>	<b>20</b>
<b>5. DFS Test Setup Photo.....</b>	<b>24</b>

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	Portable Data Collection Terminal
Trade Name	Hand Held Terminal
FCC ID.	U7X-MM3
Model No.	MM3
Frequency Range	5250-5350MHz, 5470-5725MHz
Number of Channels	802.11a: 15
Data Rate	802.11a: 6 - 54Mbps
Channel Control	Auto
Type of Modulation	802.11a:OFDM BPSK, QPSK, 16QAM, 64QAM
Antenna type	Printed on PCB
Antenna Gain	Refer to the table “Antenna List”

#### Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	M3 Mobile Co., Ltd.	M5BRZ32FBT0	-0.13dBi in 5GHz

## 802.11a Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 52:	5260 MHz	Channel 56:	5280 MHz	Channel 60:	5300 MHz	Channel 64:	5320 MHz
Channel 100:	5500 MHz	Channel 104:	5520 MHz	Channel 108:	5540 MHz	Channel 112:	5560 MHz
Channel 116:	5580 MHz	Channel 120:	5600 MHz	Channel 124:	5620 MHz	Channel 128:	5640 MHz
Channel 132:	5660 MHz	Channel 136:	5680 MHz	Channel 140:	5700 MHz		

## Note:

1. This device is a Portable Data Collection Terminal with a built-in WLAN transceiver.

Test Mode	Mode 1: Transmitter (802.11a)
-----------	-------------------------------

## 1.2. Standard Requirement

### FCC Part 15.407:

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm. A TPC mechanism is not required for systems with an E.I.R.P. of less than 500mW.

## 1.3. UNII Device Description

The UUT operates in the following band:

1. 5250-5350 MHz
2. 5470-5725 MHz

The UUT is a Client Device that does not have radar detection capability and ad-hoc function. The highest gain antenna assembly utilized with the EUT has a maximum gain of -0.13dBi(Main) in 5GHz frequency band. The 50-ohm Tx/Rx antenna port is connected to the test system to perform conducted tests. TPC is not required since the maximum EIRP is less than 500mW (27dBm).

The UUT utilizes "802.11a" IP based architecture. One nominal channel bandwidths, 20 MHz are implemented.

WLAN traffic is generated by streaming the video file "TestFile.mp2" from the Master device to the Slave device in full motion video mode using the media player with the V2.61 Codec package.

The master device is a Cisco System, Inc. AIR-AP1252AG-A-K9 802.11a/b/g/n Access Point. The Cisco System, Inc. Access Point FCC ID: LDK102061.

The UUT is a client device without radar detection therefore the interference threshold level is not required.

## 1.4. Test Equipment


### Dynamic Frequency Selection (DFS) / SR-7

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Signal Analyzer	Agilent	N9010A	MY48030495	Apr, 23, 2009
Vector Signal Generator	Agilent	E4438C	MY49070137	Apr, 02, 2009

Instrument	Manufacturer	Type No.	Serial No
Splitter/Combiner (Qty: 2)	Mini-Circuits	ZFRSC-123-S+	SN331000910
ATT (Qty: 2)	Mini-Circuits	15542	30912
ATT (Qty: 2)	Mini-Circuits	15542	30909
Access Point	Cisco System, Inc.	AIR-AP1252AG-A-K9	FTX121090DP
Notebook PC	Hp	HSTNN-155C	CNU8476RVZ
RF Cable (Qty: 4)	GORE	C86	N/A

Software	Manufacturer	Function
Agilent Signal Studio for Pulse Building V1.3.13.0	Agilent	Radar Signal Generation Software
Agilent DFS_TEST V1.0.0.73	Agilent	Radar Signal Generation Software
Media Player Classic v6.4.8.6	Gabest.org	Multimedia Player

## 1.5. Test Setup

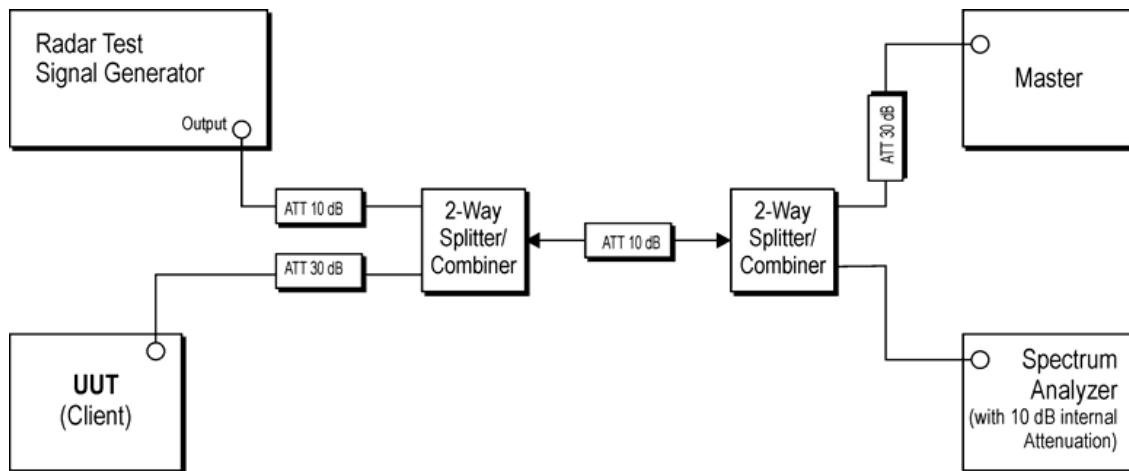

## 1.6. Limits

According to §15.407(h) and FCC 06-96 APPENDIX “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION”.

### Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (with radar detection)	Client (without radar detection)
Non-Occupancy Period	Yes	Yes	Yes
DFS Detection Threshold	Yes	Yes	Not Required
Channel Availability Check Time	Yes	Not Required	Not Required
Uniform Spreading	Yes	Not Required	Not Required
U-NII Detection Bandwidth	Yes	Yes	Not Required

### Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (with radar detection)	Client (without radar detection)
DFS Detection Threshold	Yes	Yes	Not Required
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Yes	Not required

**Interference Threshold value, Master or Client incorporating In-Service Monitoring**

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

**DFS Response requirement values**

Parameter	Value
Non-Occupancy Period	30 Minutes
Channel Availability Check Time	60 Seconds
Channel Move Time	10 Seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period (See Notes 1 and 2)

Note1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

For the short pulse radar test signals this instant is the end of the burst.

For the frequency hopping radar test signal, this instant is the end of the last radar burst generated

For the long pulse radar test signal this instant is the end of the 12 seconds period defining the radar transmission.

Note 2: The channel closing transmission time is comprised of 200 milliseconds starting at the beginning of the channel move time plus any additional intermittent control signals required facilitating channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 seconds period.

The aggregate duration of control signals will not count quiet periods in between transmissions.

**Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width ( $\mu$ sec)	PRI ( $\mu$ sec)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (radar types 1-4)				80%	120

A minimum of 30 unique waveforms is required for each of the short pulse radar type 2 through 4. For short pulse radar type 1, then same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar type 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar type 1-4.

**Long Pulse Radar Test Signal**

Radar Waveform	Bursts	Pulses Per Burst	Pulse Width ( $\mu$ sec)	Chirp Width (MHz)	PRI ( $\mu$ sec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the long pulse radar test signal. If more than 30 waveforms are used for the long pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

**Frequency Hopping Radar Test Signal**

Radar Waveform	Pulse Width ( $\mu$ sec)	PRI ( $\mu$ sec)	Hopping Sequence Length (msec)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	.333	70%	30


For the frequency hopping radar type, the same burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence.

## 1.7. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were replace 50ohm terminal from master and client device and no transmissions by either the master or client device. The spectrum analyzer was switched to the zero span (time domain) at the frequency of the radar waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz and 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm due to the interference threshold level is not required.

### Conducted Calibration Setup

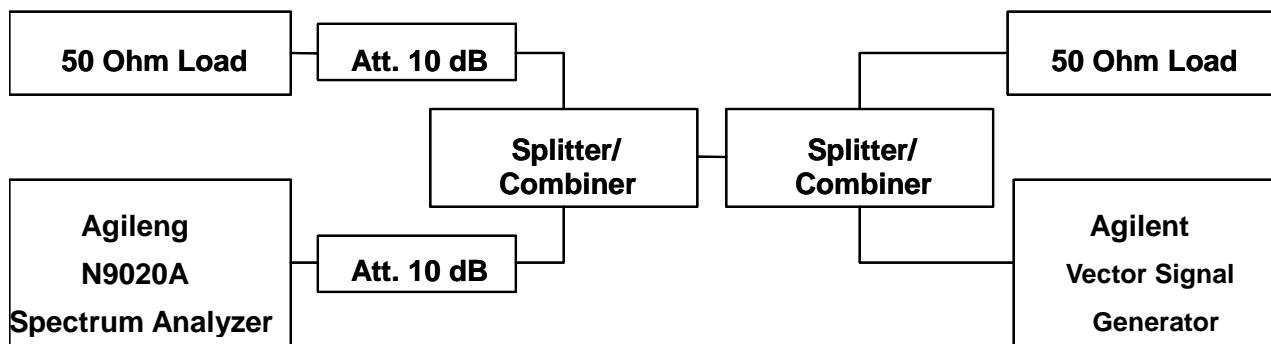


## 1.8. Radar Waveform Calibration Result


Radar Type 1 Calibration Plot at 5300MHz

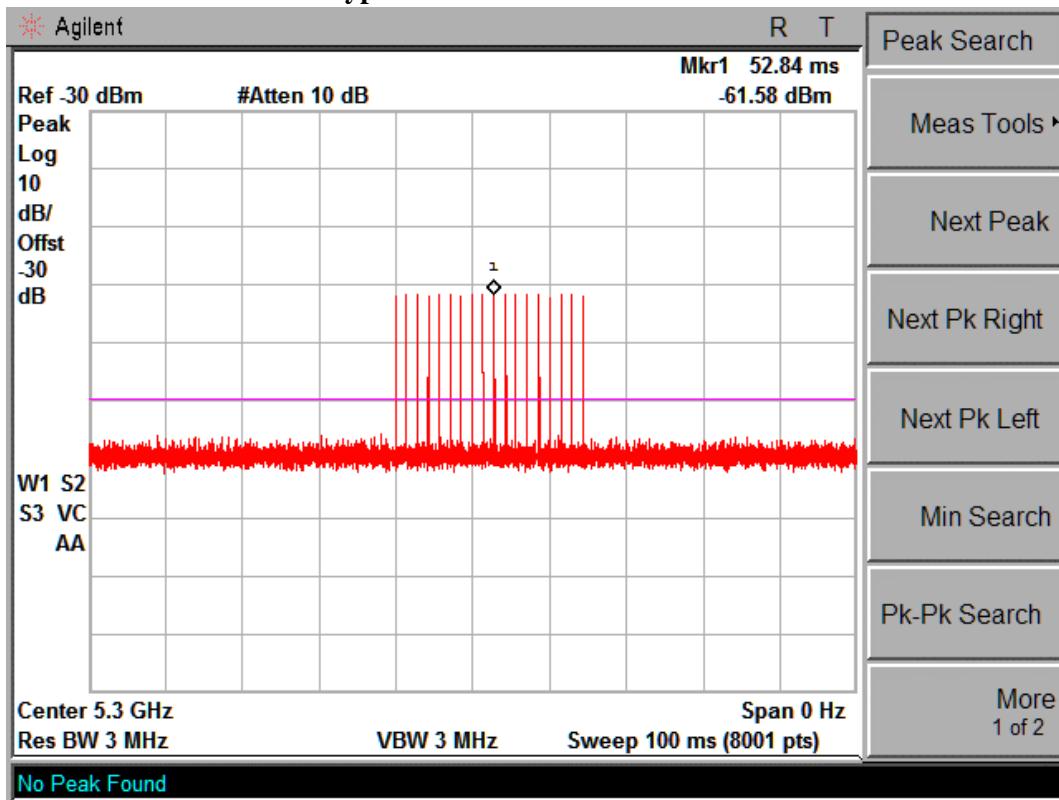


Radar Type 1 Calibration Plot 5660MHz

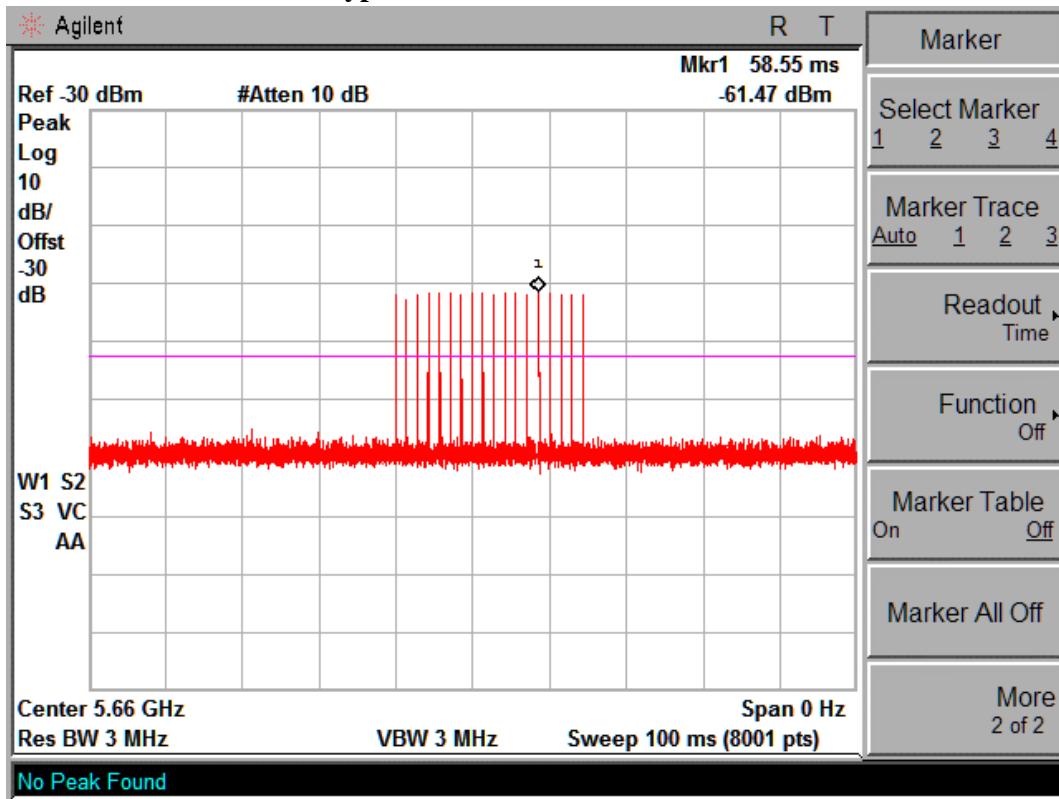

### Plot of WLAN Traffic at 5300MHz

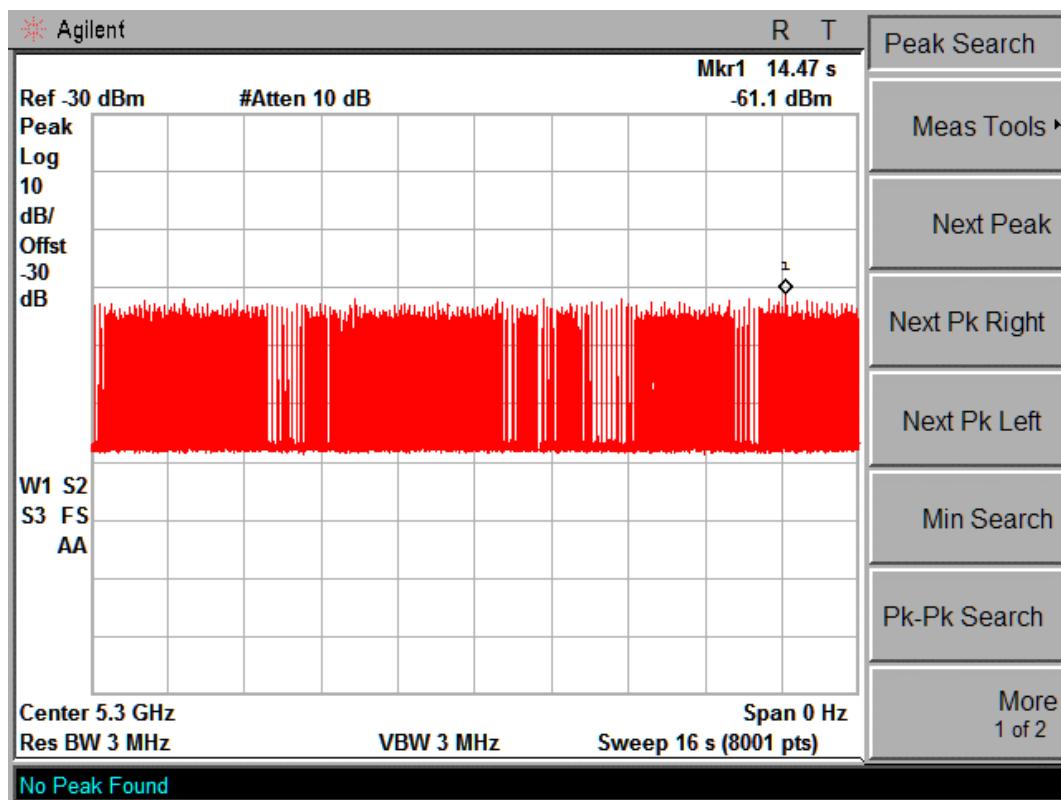

### Plot of WLAN Traffic at 5660MHz

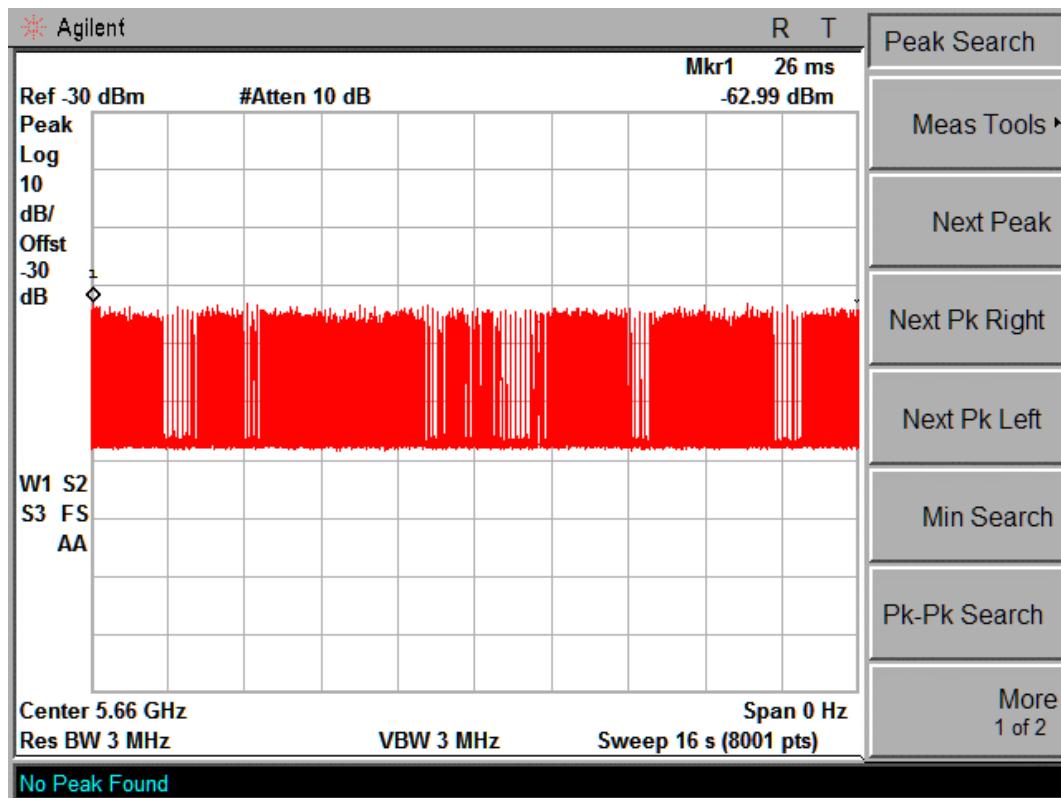

## 2. Channel Move Time and Channel Closing Transmission Time

### 2.1. Test Procedure

These tests define how the following DFS parameters are verified during In-Service Monitoring; Channel Closing Transmission Time and Channel Move Time.

The steps below define the procedure to determine the above mentioned parameters when a radar burst with a level -61dBm is generated on the operating channel of the U-NII device.

A U-NII device operating as a Client device will associate with the Master device at 5300MHz, 5660MHz.

During the in-service monitoring detection probability and channel moving tests the system was configured with a streaming video file from the master device (sourced by the PC connected to the master device via an Ethernet interface) to the client device. The streamed file was the “FCC” test file and the client device was using Media Player Classic as required by FCC Part 15 Subpart E.

Observe the transmissions of the EUT at the end of the radar burst on the operating channel for duration greater than 10 seconds. Measure and record the transmissions from the spectrum analyzer during the observation time (Channel Move Time). Compare the channel move time and channel closing transmission time results to the limits defined in the DFS Response requirement values table.

### 2.2. Test Requirement


Parameter	Value
Channel Move Time	10 Seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period

### 2.3. Uncertainty

± 1ms.

## 2.4. Test Result of Channel Move Time


Product : Portable Data Collection Terminal  
 Test Item : Channel Move Time Test  
 Radar Type : Type 1  
 Test Mode : Mode 1: Transmitter (802.11a)

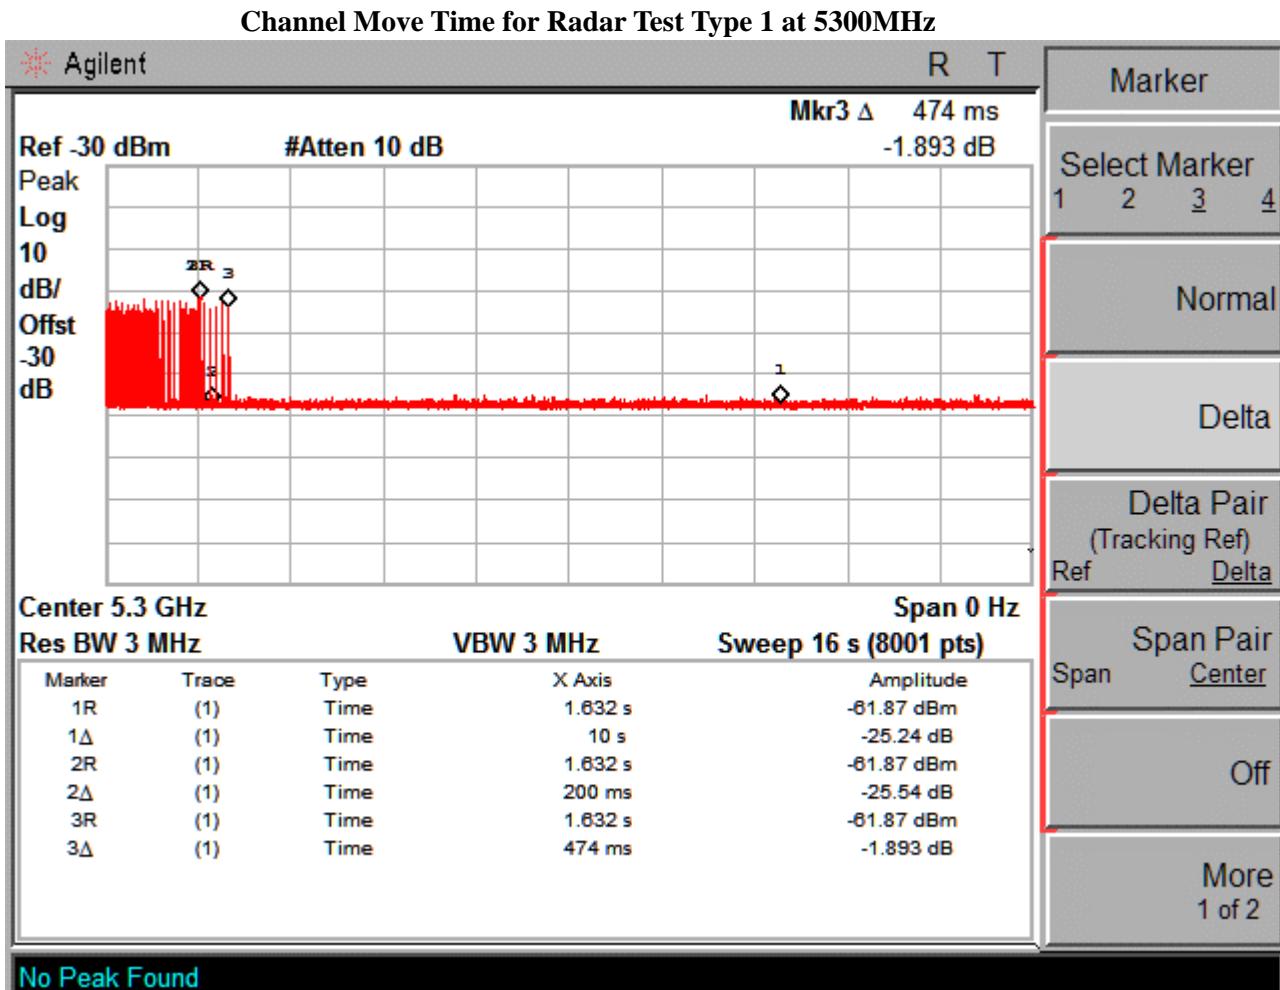

Test Item	Measurement Level	Limit	Results
Channel Move Time	0.474 Seconds	10 Seconds	Pass

The results showed that after radar signal injected the channel move time was less than 10 seconds.

## Channel Move Time for Radar Test Type 1 at 5660MHz

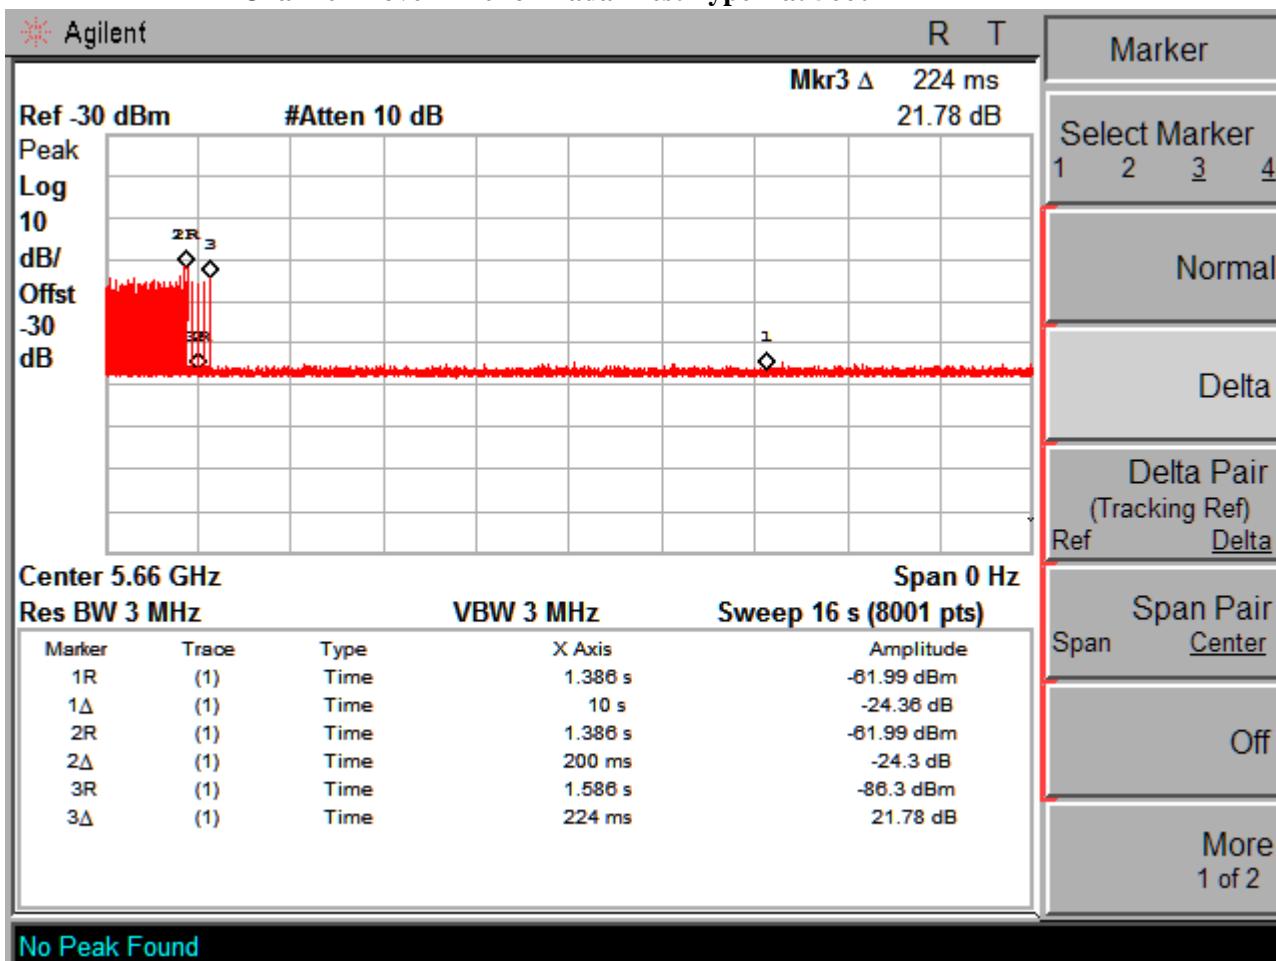


Test Item	Measurement Level	Limit	Results
Channel Move Time	0.224 Seconds	10 Seconds	Pass

The results showed that after radar signal injected the channel move time was less than 10 seconds.

## 2.5. Test Result of Channel Closing Transmission Time

Product : Portable Data Collection Terminal  
 Test Item : Channel Closing Transmission Time Test  
 Radar Type : Type 1  
 Test Mode : Mode 1: Transmitter (802.11a)

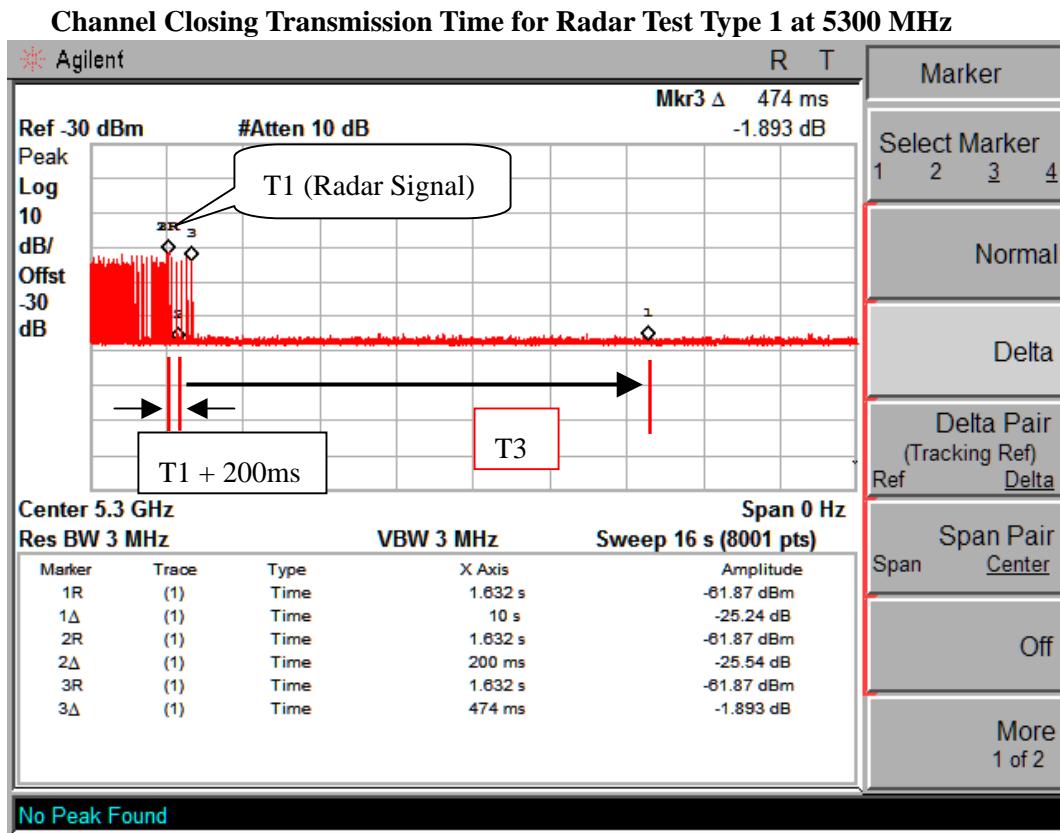


Test Time	Bins	Time Pre Bin (ms)	Aggregate Time (ms)
T1 + 200ms	6	2	12
T3	4	2	8

Note: Time Pre Bin (ms) = 16s / 8000s = 2ms

Test Item	Measurement Level	Limit	Results
Channel Closing Transmission time	20 milliseconds	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period	Pass

The results showed that after radar signal injected the channel transmission closing time less than 200 milliseconds and an aggregate of no more than 60 milliseconds.

## Channel Closing Transmission Time for Radar Test Type 1 at 5660 MHz

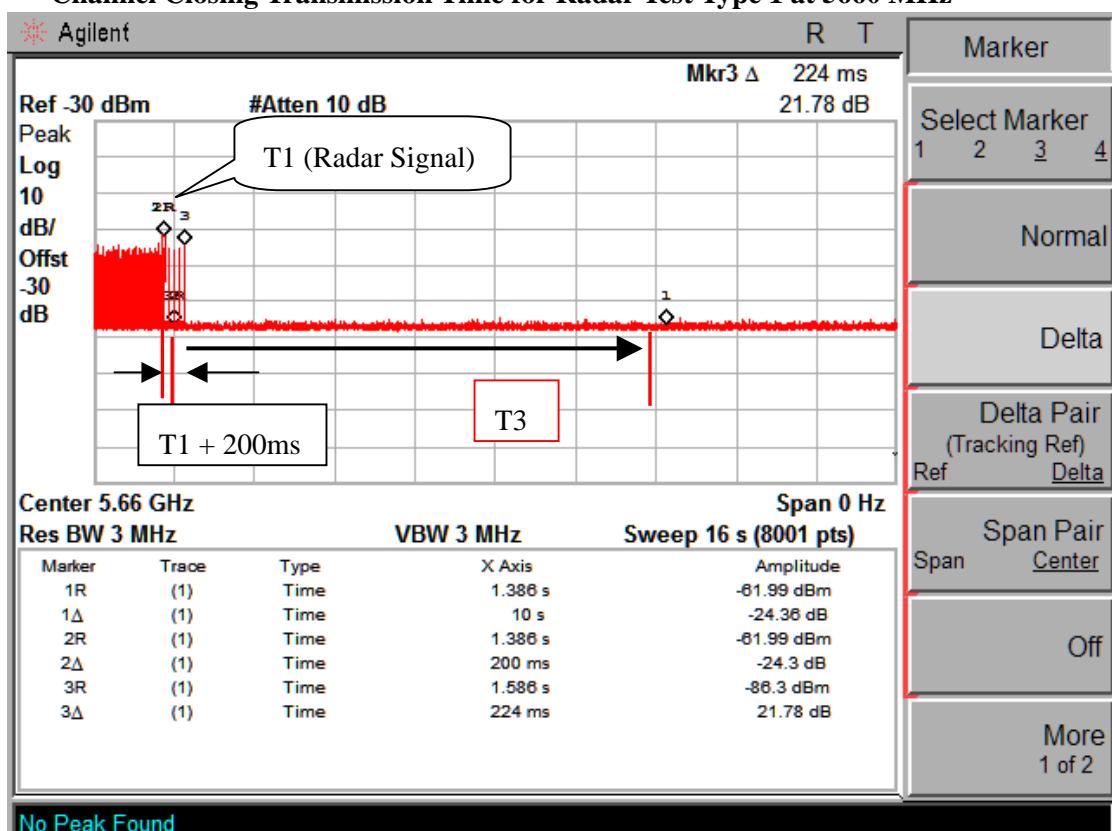

Test Time	Bins	Time Pre Bin (ms)	Aggregate Time (ms)
T1 + 200ms	3	2	6
T3	3	2	6

Note: Time Pre Bin (ms) = 16s / 8000s = 2ms

Test Item	Measurement Level	Limit	Results
Channel Closing Transmission time	12 milliseconds	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period	Pass

The results showed that after radar signal injected the channel transmission closing time less than 200 milliseconds and an aggregate of no more than 60 milliseconds.

### 3. Non-Occupancy Period

#### 3.1. Test Procedure

Measure the EUT for more than 30 minutes following the channel close/move time to verify that the UUT does not resume any transmissions on this channel.

#### 3.2. Test Requirement

Parameter	Value
Non-Occupancy Period	>30 Minutes


#### 3.3. Uncertainty

± 1ms.

### 3.4. Test Result of Non-Occupancy Period

Product : Portable Data Collection Terminal  
Test Item : Non-Occupancy Period  
Radar Type : Type 1  
Test Mode : Mode 1: Transmitter (802.11a)


#### 30 Minute Non-Occupancy Period (Associated test) at 5300 MHz

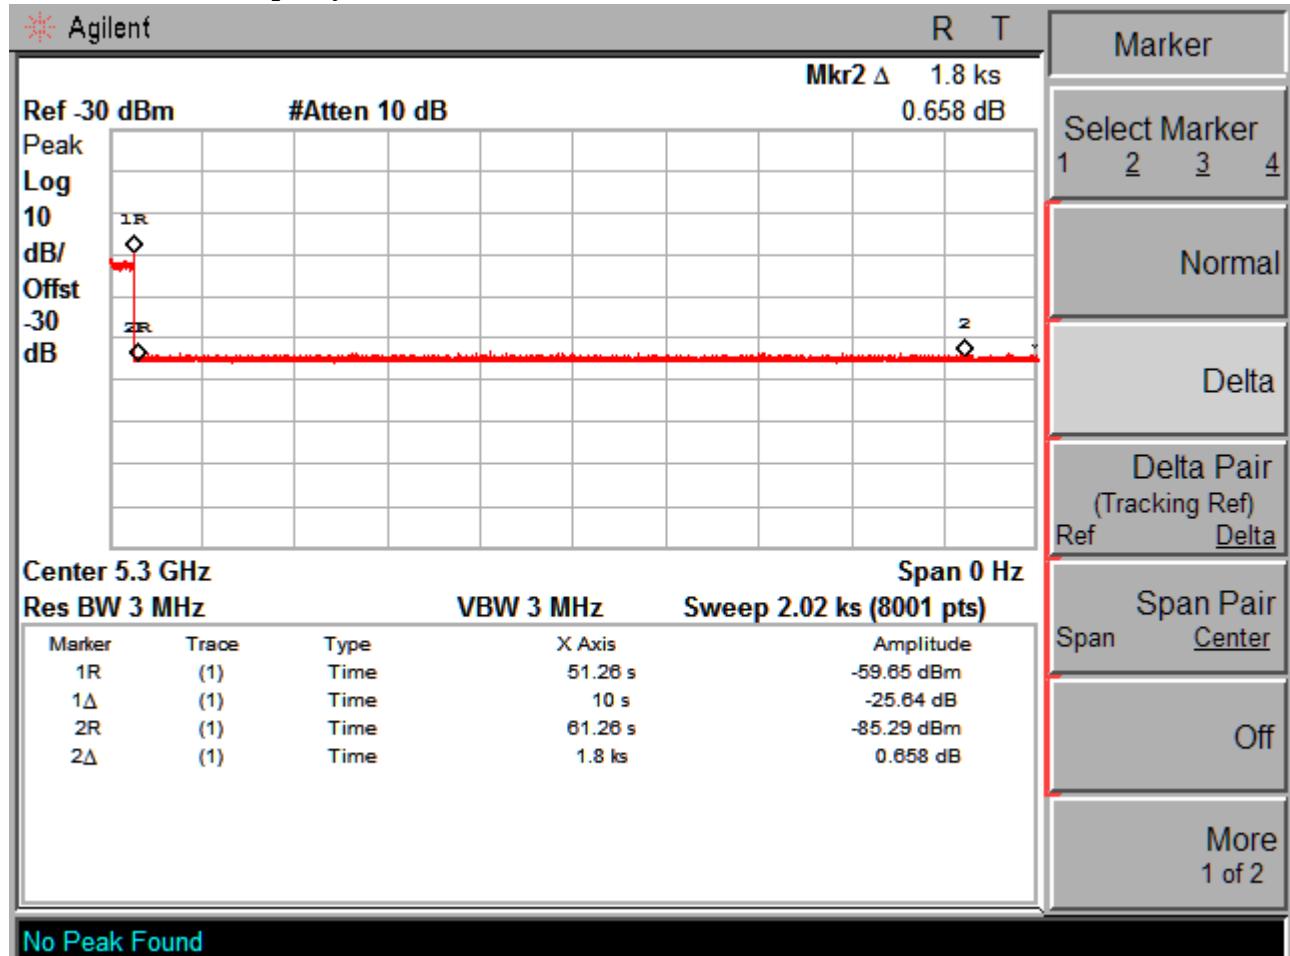

Test Item	Measurement Level	Limit	Results
Non-Occupancy Period (Associated test)	>30 Minutes	>30 Minutes	Pass

No EUT transmissions were observed on the test channel during 30 minutes observation time.


## 30 Minute Non-Occupancy Period (Associated test) at 5660 MHz

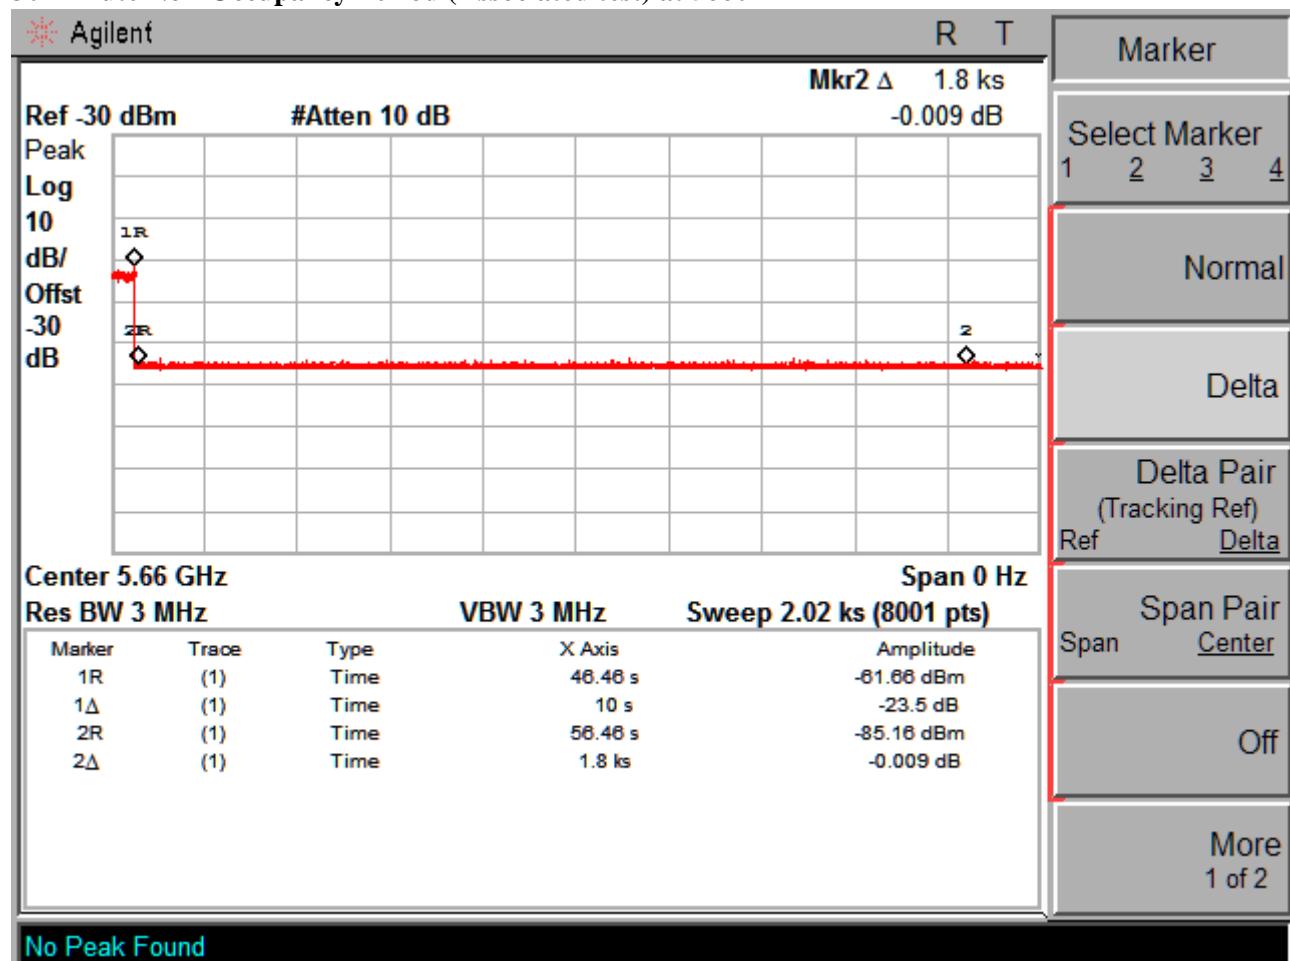

Test Item	Measurement Level	Limit	Results
Non-Occupancy Period (Associated test)	>30 Minutes	>30 Minutes	Pass

No EUT transmissions were observed on the test channel during 30 minutes observation time.


## 30 Minute Non-Occupancy Period (Non-associated test) at 5300 MHz

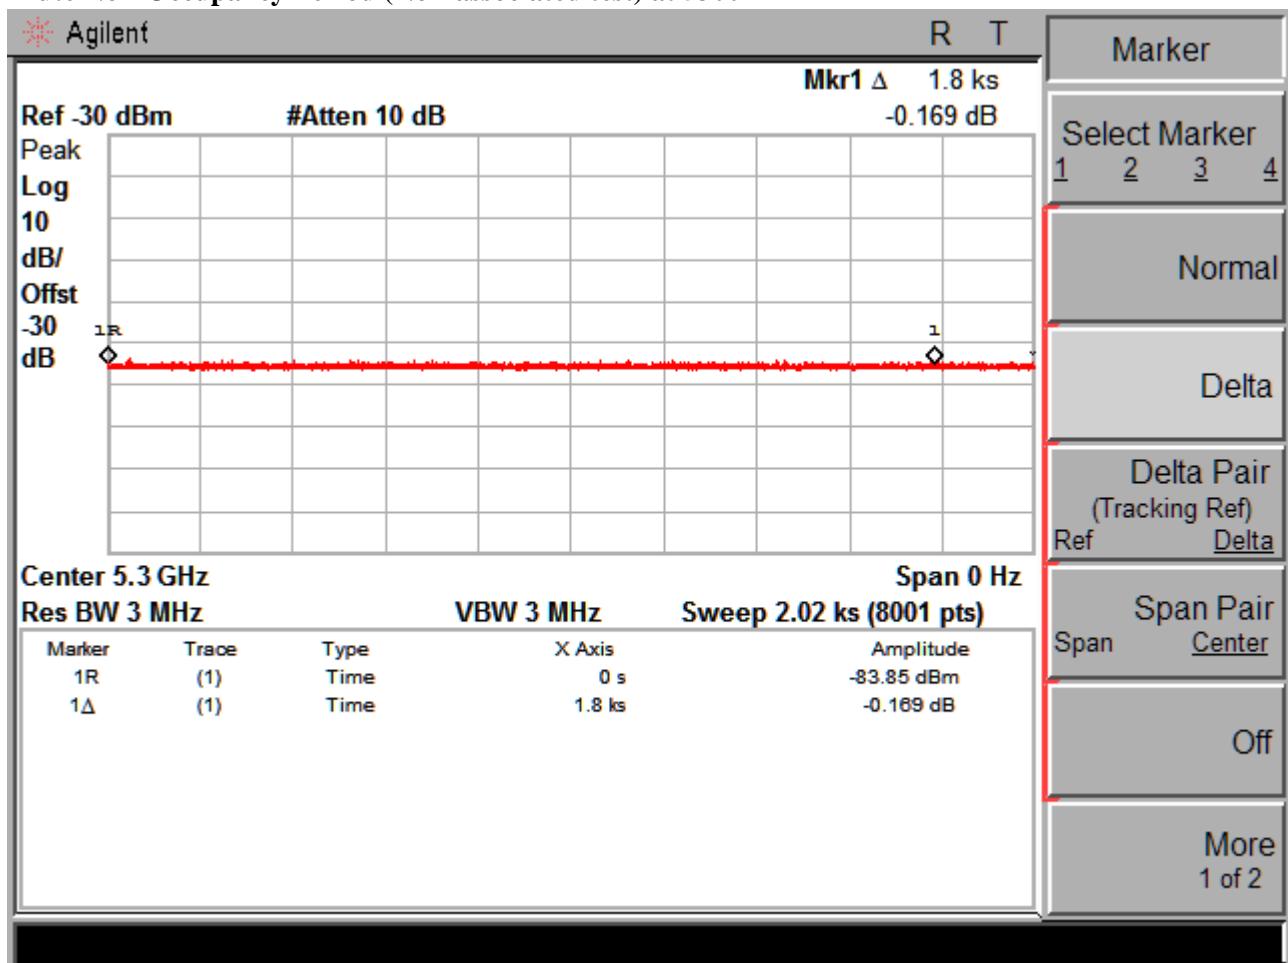

Test Item	Measurement Level	Limit	Results
Non-Occupancy Period (Non-associated test)	>30 Minutes	>30 Minutes	Pass

No EUT transmissions were observed on the test channel during 30 minutes observation time.

## 30 Minute Non-Occupancy Period (Non-associated test) at 5660 MHz

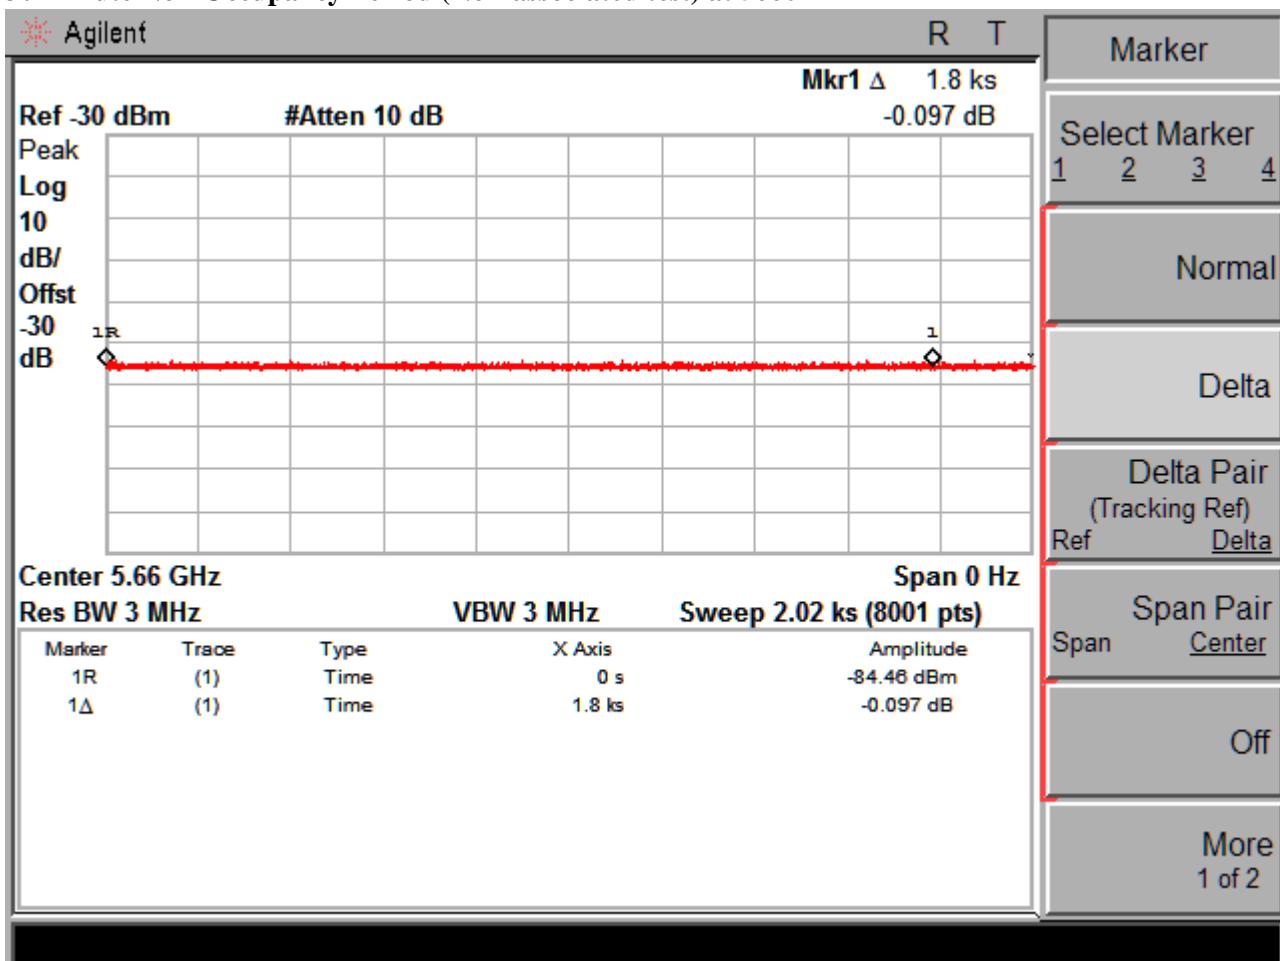

Test Item	Measurement Level	Limit	Results
Non-Occupancy Period (Non-associated test)	>30 Minutes	>30 Minutes	Pass

No EUT transmissions were observed on the test channel during 30 minutes observation time.

#### 4. DFS Test Setup Photo

**Full DFS Test Setup Photo**



**DFS Set-up Photo: Spectrum Analyzer and Radar Generator**



**DFS Set-up Photo: Master and Client**

