



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

TEST REPORT

Dates of Tests: JAN 14 ~ 25, 2008
 Test Report S/N: LR500190801F
 Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

U9S-FX853C

APPLICANT

i-Sirius Co., Ltd

FCC Classification	:	Digital Transmission System (DTS)
Manufacturing Description	:	Dual band Wireless Local Loop Phone
Manufacturer	:	Jurong Hi-Tech (Suzhou) Co. Ltd
Model name	:	FX-853C
Test Device Serial No.:	:	-
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2003
Frequency Range	:	2405MHz ~ 2480MHz
Max. Output Power	:	-4.17 dBm Peak Conducted for Handset
Data of issue	:	January 31, 2008

This test report is issued under the authority of:

Dong-Min JUNG, Technical Manager

The test was supervised by:

Kyung-Taek LEE, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.

NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S -----	3
2. INFORMATION'S ABOUT TEST ITEM -----	4
3. TEST REPORT -----	5
3.1 SUMMARY OF TESTS -----	5
3.2 TECHNICAL CHARACTERISTICS TEST -----	6
3.2.1 6dB BANDWIDTH -----	6
3.2.2 OUTPUT POWER -----	8
3.2.3 POWER SPECTRAL DENSITY -----	10
3.2.4 BAND - EDGE -----	12
3.2.5 FIELD STRENGTH OF HARMONICS -----	17
3.2.6 AC CONDUCTED EMISSIONS -----	20
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS -----	23

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2008-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2009-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2008-03-28	FCC filing
VCCI	JAPAN	R2133, C2307	2008-06-22	VCCI registration
IC	CANADA	IC5799	2008-04-23	IC filing

2. Information's about test item

2-1 Client / Manufacturer

Company name : i-Sirius Co.,Ltd
 Address : 3th FL, Sam Young B/D, 106-2, Banpo-Dong, Seocho-Gu, Seoul, 137-040, Korea
 Tel / Fax : +82-2-3480-0970 / +82-2-596-6570

2-2 Manufacturer

Company name : Jurong Hi-Tech (Suzhou) Co. Ltd
 Address : 275, Xinglong Street Suzhou Industrial Park, Suzhou 215024, China

2-3 Equipment Under Test (EUT)

Trade name : Dual band Wireless Local Loop Phone
 Model name : FX-853C
 Brand name : MOTOROLA
 Date of receipt : December 16, 2007
 EUT condition : Pre-Production, not damaged
 Antenna Gain : Max 0.90dBi for Zigbee of Handset
 Frequency Range : 2405MHz ~ 2480MHz (DSSS)
 RF output power Range : -1.52 dBm Peak Conducted for Handset
 Number of channels : 16
 Channel spacing : 5MHz
 Type of Modulation : O-QPSK
 Power Source (Adaptor) : Input: 100-240Vac, 50/60Hz, 0.3A Output: 5Vdc, 0.6A
 Power Source (Battery) : 3.6Vdc Ni-MH Battery, 500mAh

2-4 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2405	2445	2480

2-5 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
DESKTOP CHARGER	FX-853C	-	i-Sirius

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(b)	Transmitter Output Power	< 1Watt	Conducted	C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(a)	6 dB Bandwidth	> 500kHz		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm @ 3kHz		C
15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.207	AC Conducted Emissions	EN 55022	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2003

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 5 MHz

VBW = 100 kHz (VBW \geq RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:




Frequency (MHz)	Handset Test Results	
	Measured Bandwidth (MHz)	Result
2405	1.500	Complies
2445	1.550	Complies
2480	1.450	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth $>$ 500kHz

Handset DATA

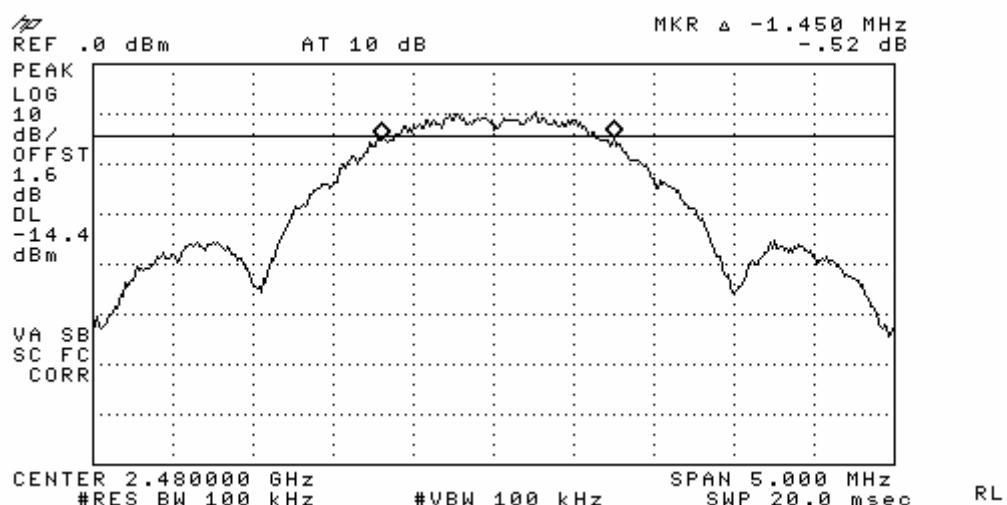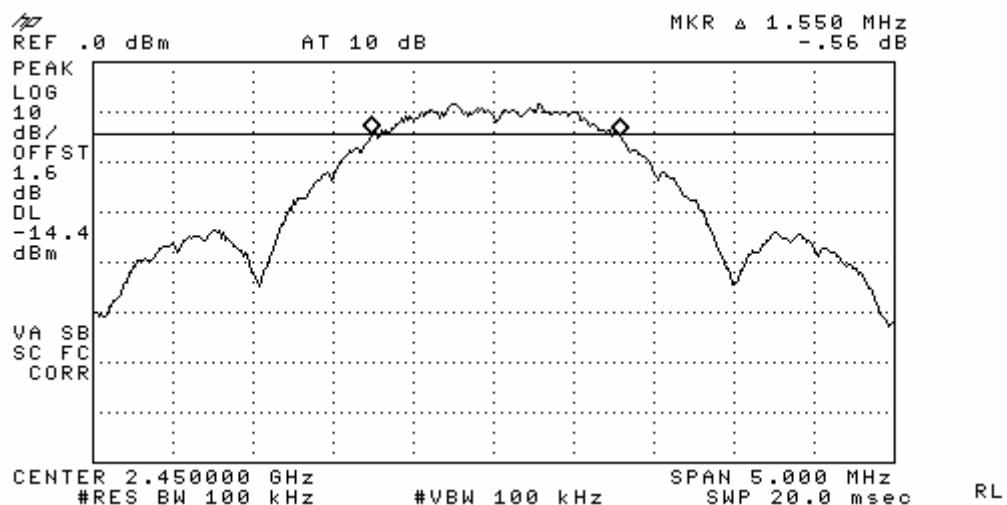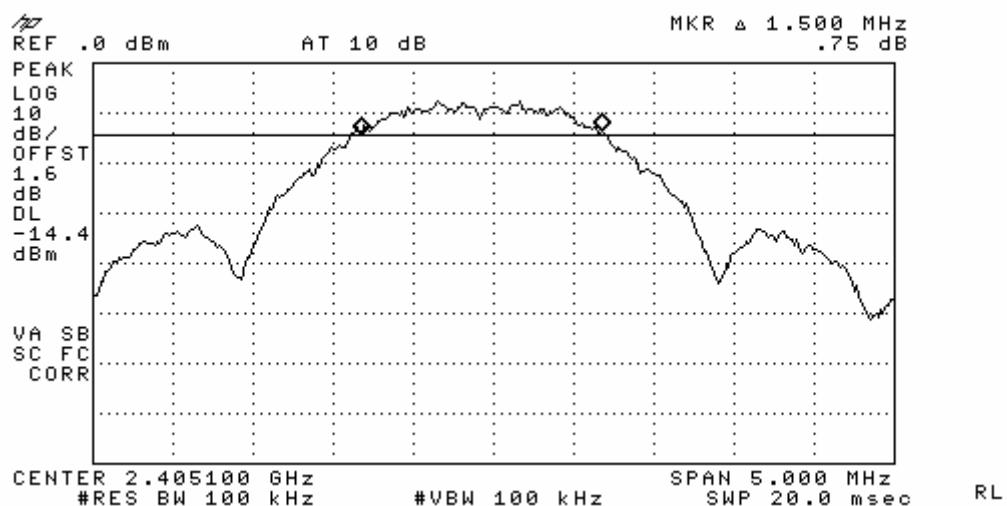

3.2.2 Output Power Measurement

Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 10 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW \geq RBW)

Detector function \equiv peak

Trace = max hold

Sweep = auto




Measurement Data:

Frequency (MHz)	Handset Test Results		
	dBm	mW	Result
2405	-4.17	0.3828	Complies
2445	-4.99	0.3170	Complies
2480	-6.12	0.2443	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:	< 1W
--------------------------	------

Handset DATA

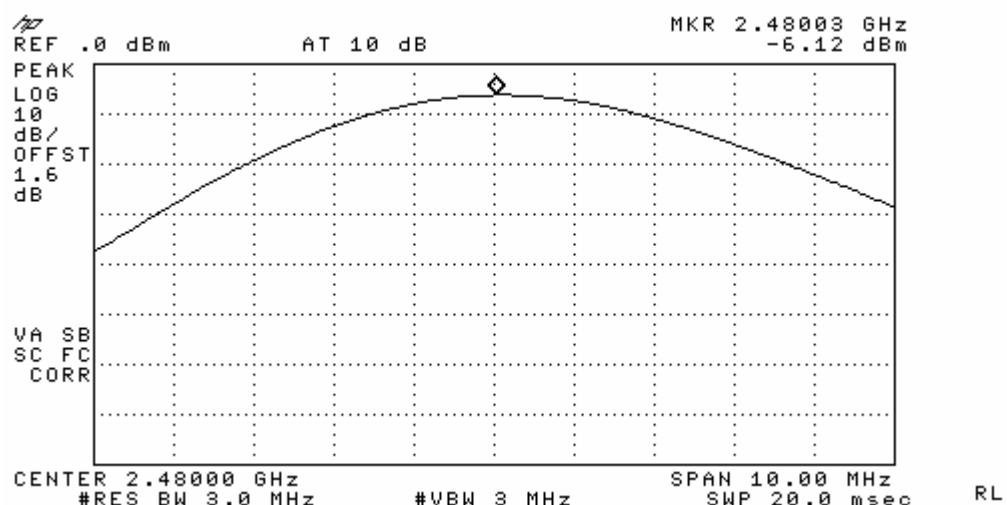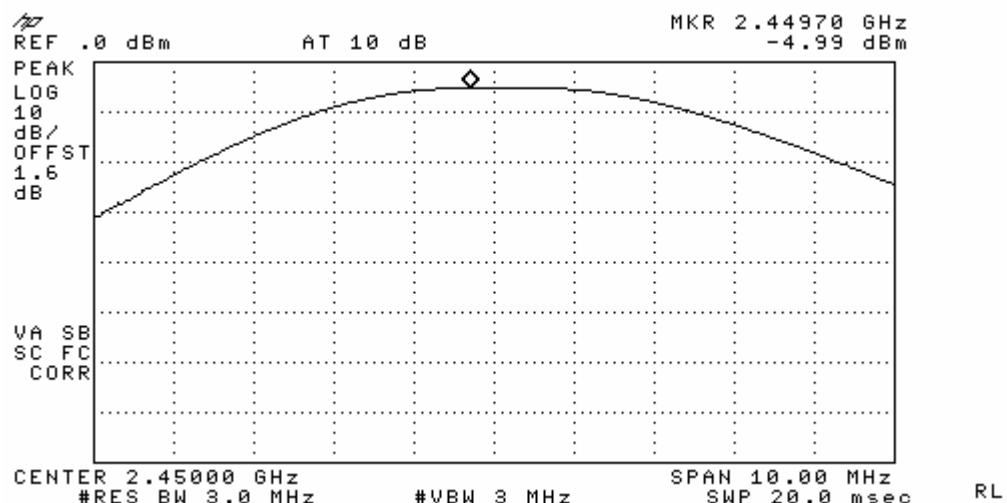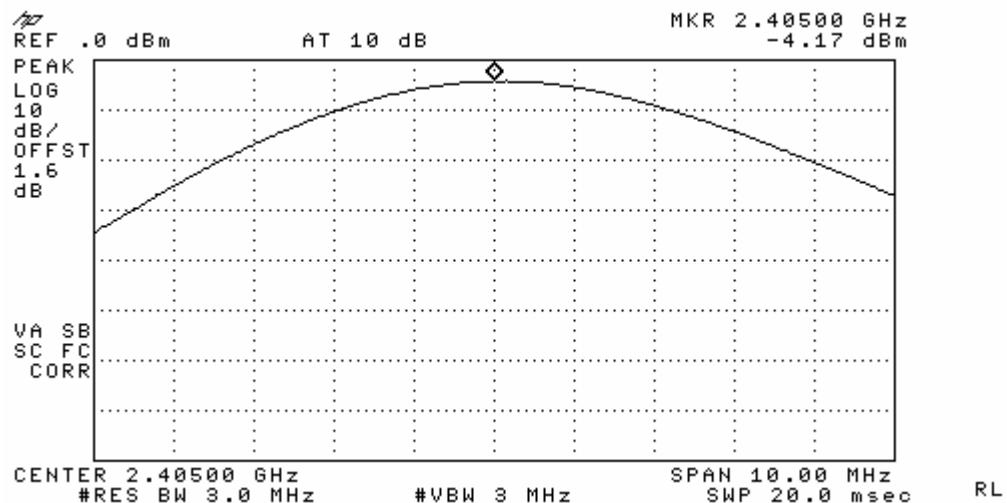

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = VBW = 3 kHz Span = 100 KHz

Sweep = 1000 sec Trace = max hold

Detector function = peak

Measurement Data:




Frequency (MHz)	Handset Test Results	
	dBm	Result
2405	-18.80	Complies
2445	-19.60	Complies
2480	-20.02	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

Power Spectral Density	< 8dBm @ 3kHz BW
------------------------	------------------

Handset DATA

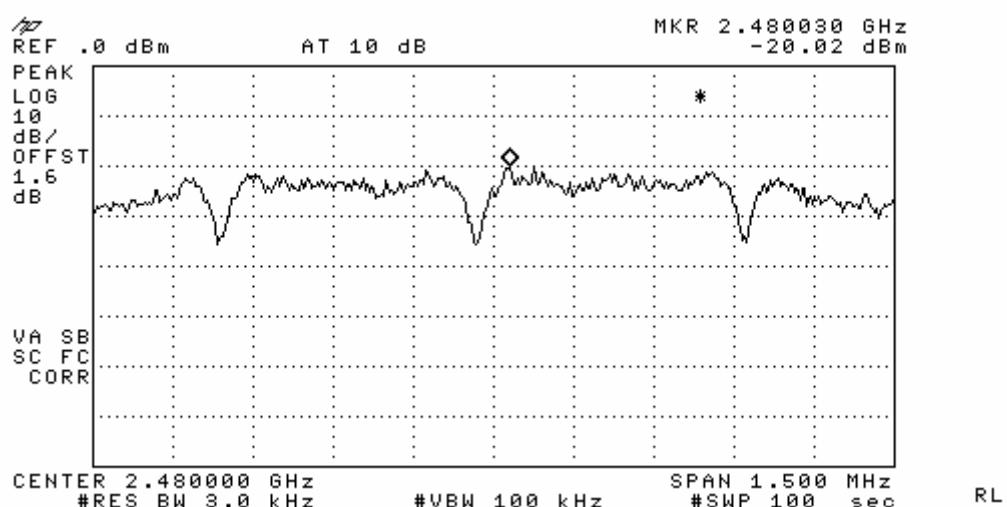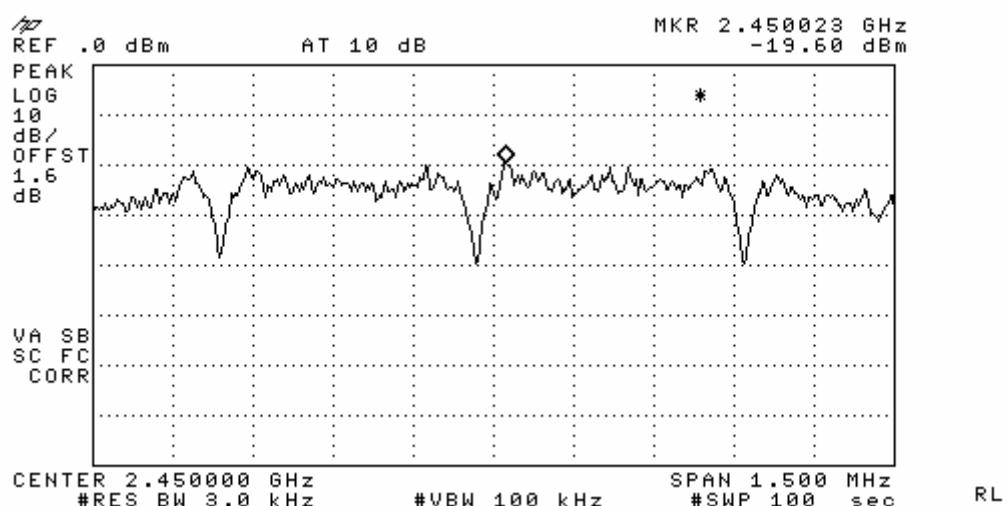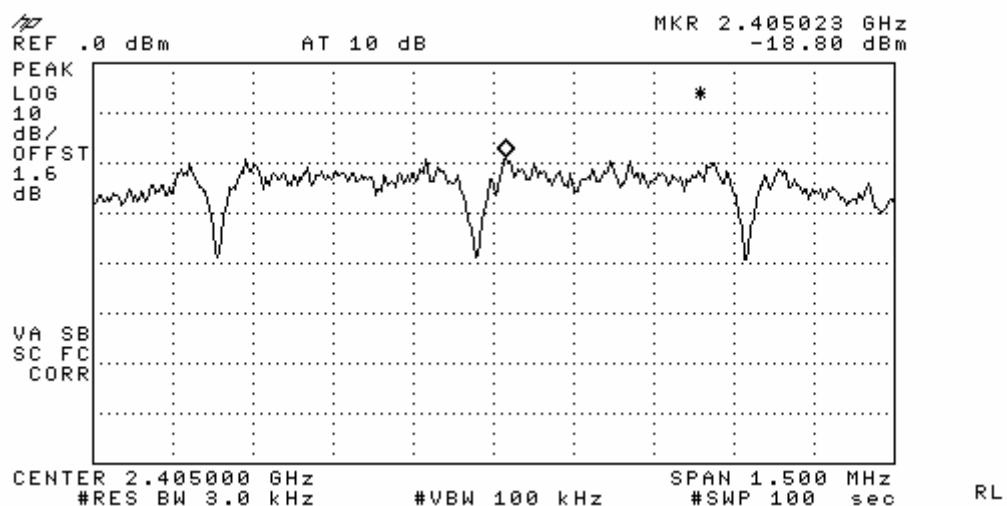

3.2.4 Band - edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz VBW = 100 kHz

Span = 20 MHz Detector function = peak

Measurement Data: Complies



- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Handset Band-edge Measurements

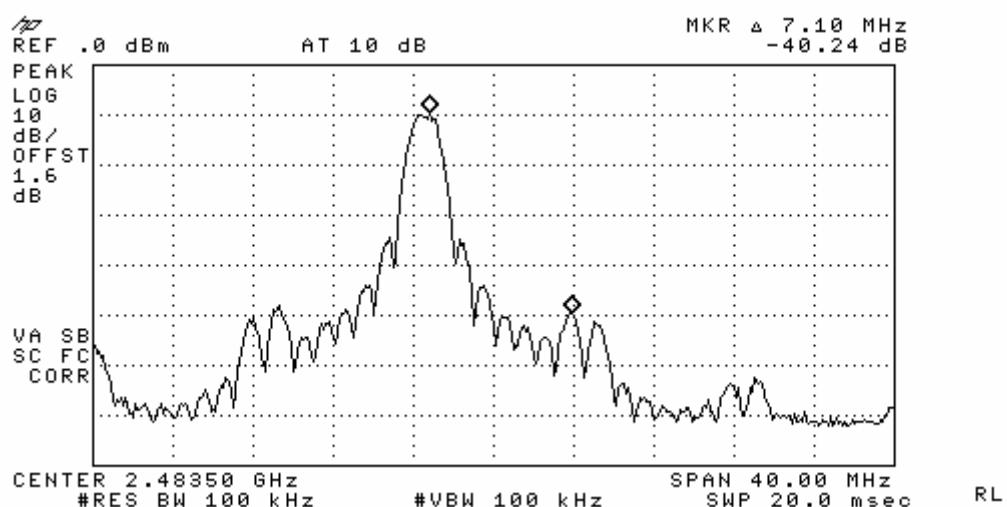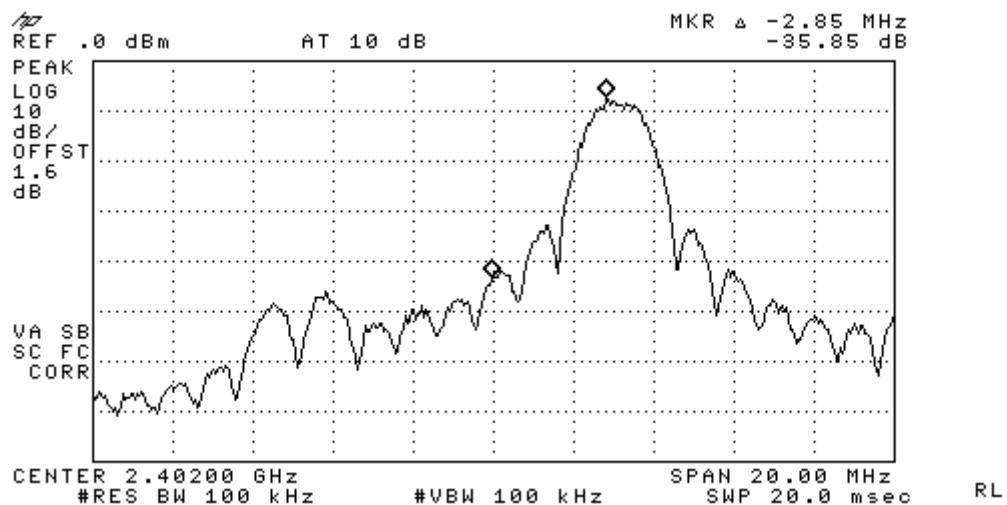

Band-edges in the restricted band 2483.5 ~ 2500 MHz measurement

- Document DA 00-705 Marker Delta Method

Frequency (MHz)	Detect mode	Pol.	Reading (dBuV/m)	T.F (dB)	Step 1 Data	Step 3 delta	Step 3 Data	Limit
2480	PK	V	59.44	34.6	94.04	40.24	53.8	74
	AV	V	49.86	34.6	84.46	40.24	44.22	54



Note) Step 1 = Reading + T.F

T.F = Ant.F + Cable loss

Step 3 = Step 1 – Delta Value



Handset data ---

Band - edge (at 20 dB blow) – Low channel

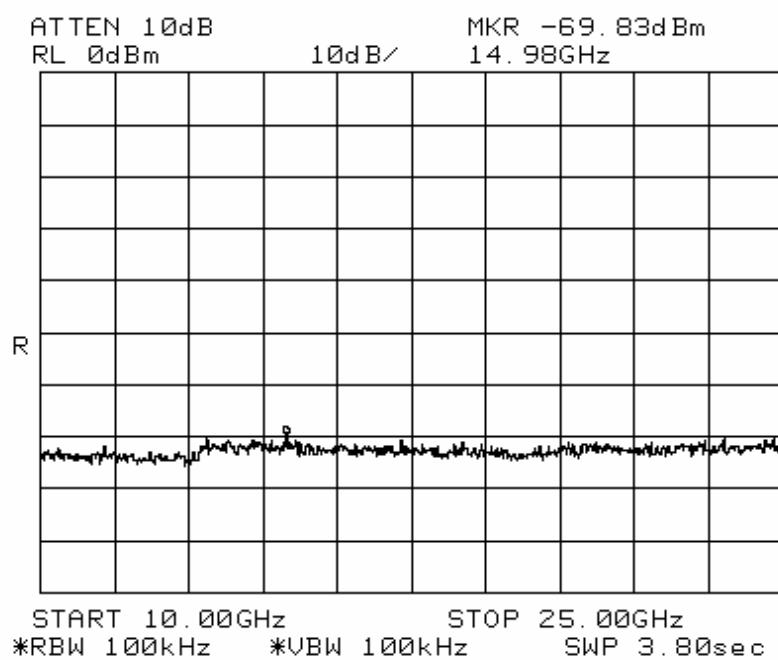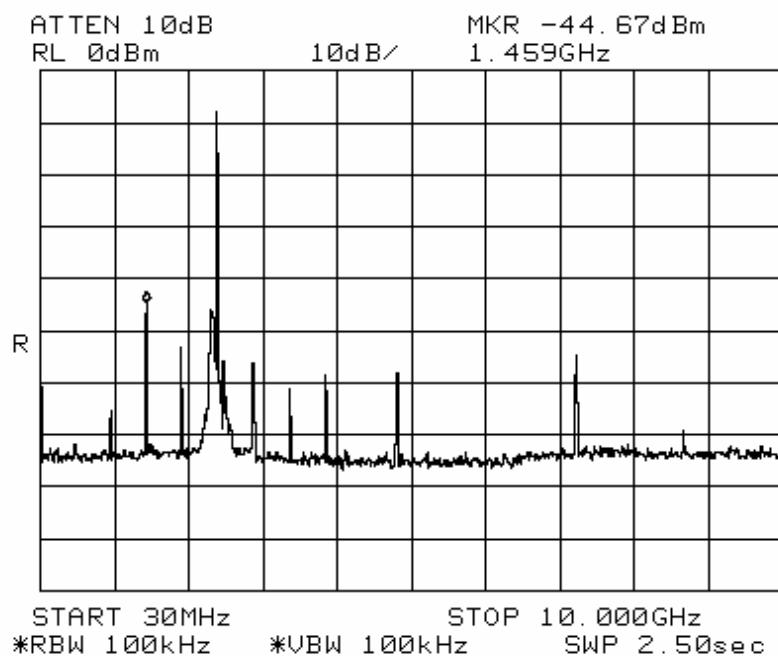Frequency Range = 30 MHz ~ 10th harmonic.



Handset data ---

Band - edge (at 20 dB blow) – Mid channel

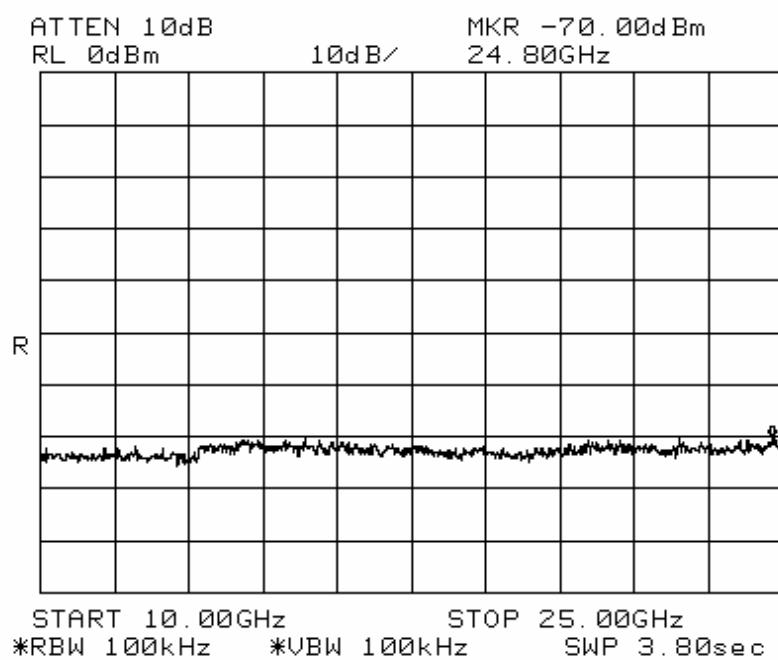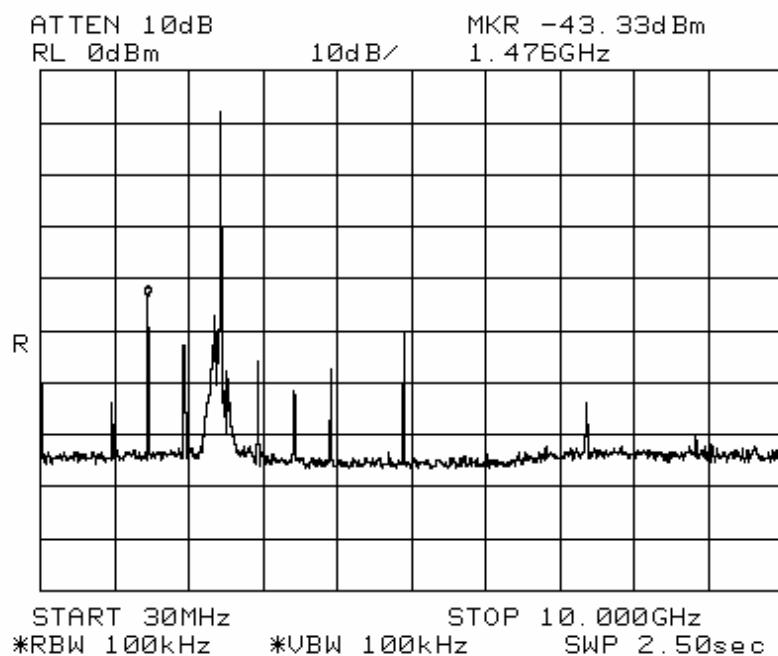Frequency Range = 30 MHz ~ 10th harmonic.

Handset data ---

Band - edge (at 20 dB blow) – High channel

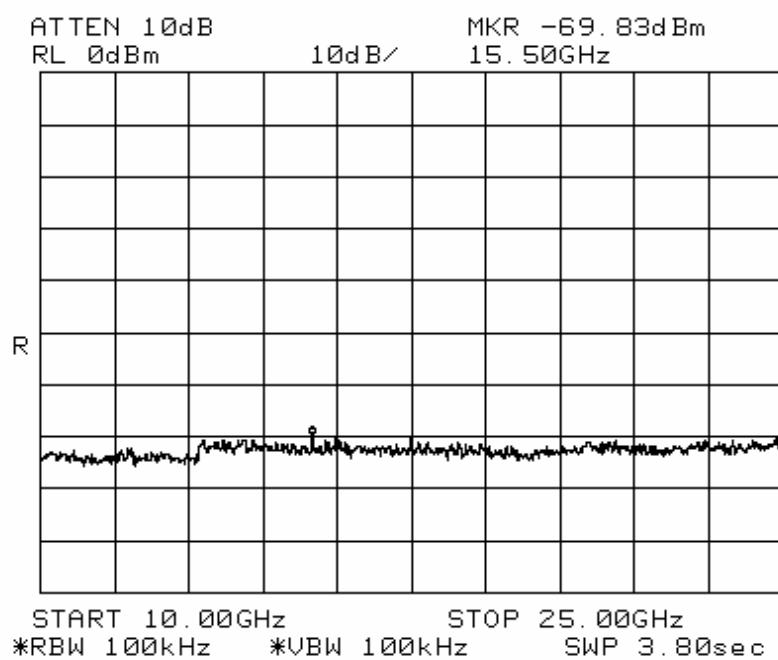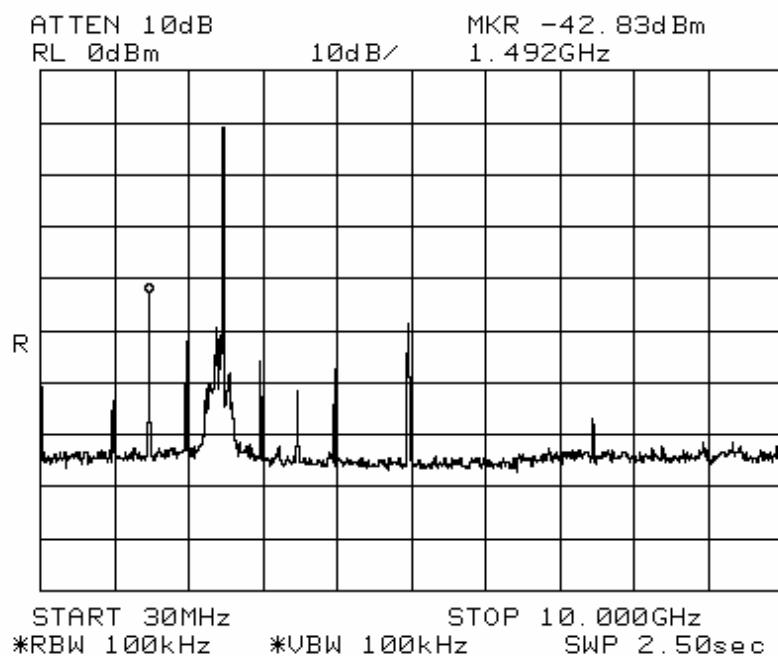Frequency Range = 30 MHz ~ 10th harmonic.

3.2.5 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)
= 1 MHz (1 GHz ~ 10th harmonic)

VBW ≥ RBW

Span = 100 MHz

Detector function = Average

Trace = max hold

Sweep = auto

Measurement Data: Complies

→ Refer to the next page

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:**1. PEAK data**

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
1443	54.08	1470	53.82	1488	52.41
1924	43.72	1959	42.93	1984	45.93
2325	54.92	2369	55.31	2400	55.03
2887	42.83	2940	42.72	2975	44.71
3847	49.27	3920	47.95	2560	46.32
4809	56.33	4899	59.03	4961	51.33
-	-	-	-	-	-
Measurement uncertainty		\pm 6 dB			

Remark: No other emissions were detected at a level greater than 20dB below limit.

2. AVERAGE data

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
1443	52.87	1470	52.79	1488	51.37
1924	42.33	1959	41.68	1984	44.35
2325	53.06	2369	53.05	2400	53.31
2887	41.65	2940	40.83	2975	43.63
3847	47.86	3920	46.79	2560	44.50
4809	47.08	4899	49.26	4961	44.93
-	-	-	-	-	-
Measurement uncertainty		\pm 6 dB			

Remark: No other emissions were detected at a level greater than 20dB below limit.


Handset data



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

BUT/Model No.: FX-853C (HAND) TEST MODE: Zigbee mode

Temp Humi : 12 / 34 Tested by: B.S.KIM

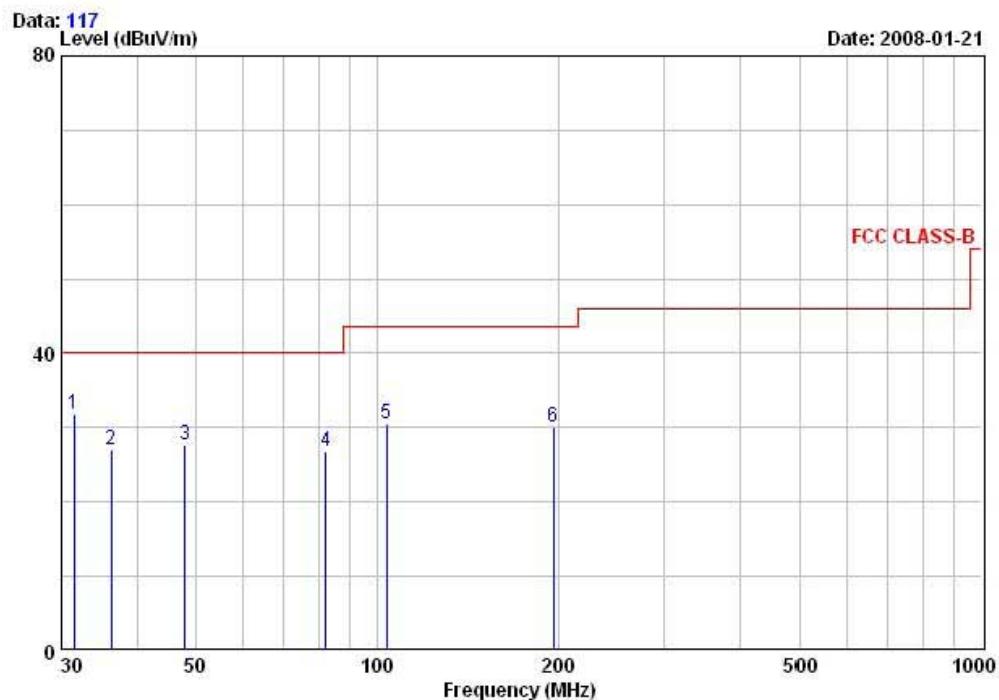

Freq MHz	Reading dBuV	C.F dB	Result QK dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
								Polarization
1 31.48	45.15	-13.35	31.80	40.00	8.20	334	118	HORIZONTAL
2 36.25	40.00	-13.05	26.95	40.00	13.05	100	107	VERTICAL
3 48.04	40.40	-12.74	27.66	40.00	12.34	100	334	VERTICAL
4 82.34	43.25	-16.34	26.91	40.00	13.09	385	110	HORIZONTAL
5 103.75	44.90	-14.28	30.62	43.50	12.88	100	339	VERTICAL
6 196.48	43.20	-13.01	30.19	43.50	13.31	100	241	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.6 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


* Decreases with the logarithm of the frequency

AC Conducted Emissions –Line



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel: +82-31-323-6008
Fax: +82-31-323-6010

EUT / Model No. : FX-853C Phase : LINE
 Test Mode : Zigbee mode Test Power : 120 / 60
 Temp./Humi. : 19 / 22 Test Engineer : B.S.KIM

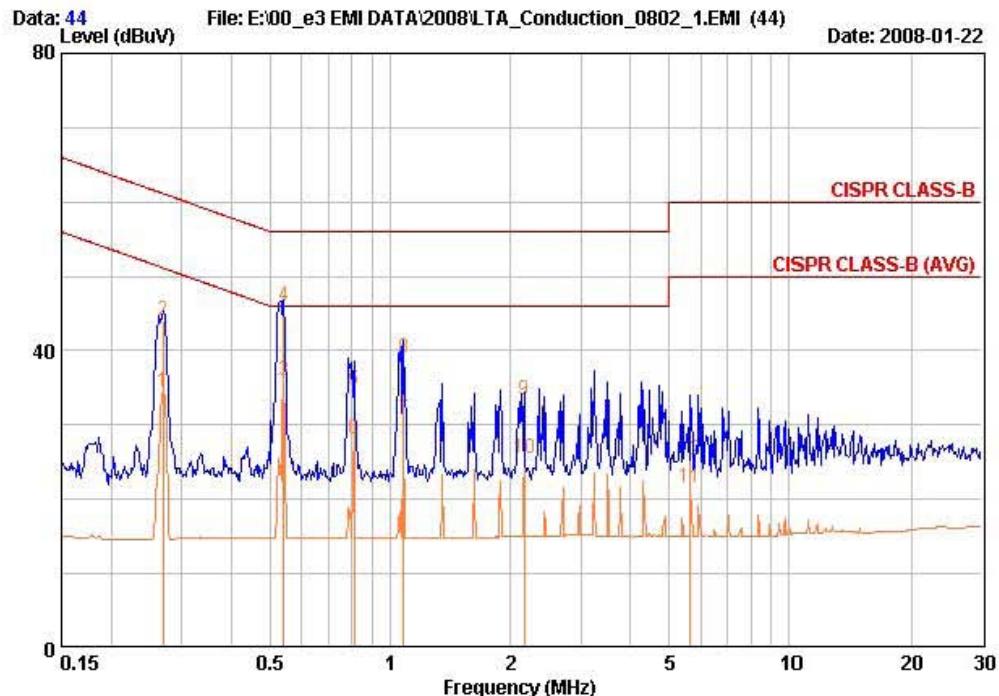

Freq MHz	RD QP		RD AV		C. F dB	Result dBuV	Result dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
	QP	AV	QP	AV							
0.270	43.80	34.27	0.25	44.05	44.05	34.52	61.12	51.12	17.06	16.59	
0.541	45.60	35.71	0.29	45.89	45.89	36.00	56.00	46.00	10.11	10.00	
0.813	34.30	27.70	0.40	34.70	34.70	28.10	56.00	46.00	21.30	17.90	
1.082	38.60	30.45	0.32	38.92	38.92	30.77	56.00	46.00	17.08	15.23	
2.167	32.80	24.98	0.47	33.27	33.27	25.45	56.00	46.00	22.73	20.55	
5.653	24.80	21.10	0.58	25.38	25.38	21.68	60.00	50.00	34.62	28.32	


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions -Neutral



243 Jibug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel: +82-31-323-6008
Fax: +82-31-323-6010

EUT / Model No. : FX-853C Phase : NEUTRAL
 Test Mode : Zigbee mode Test Power : 120 / 60
 Temp./Humi. : 19 / 22 Test Engineer : B.S.KIM

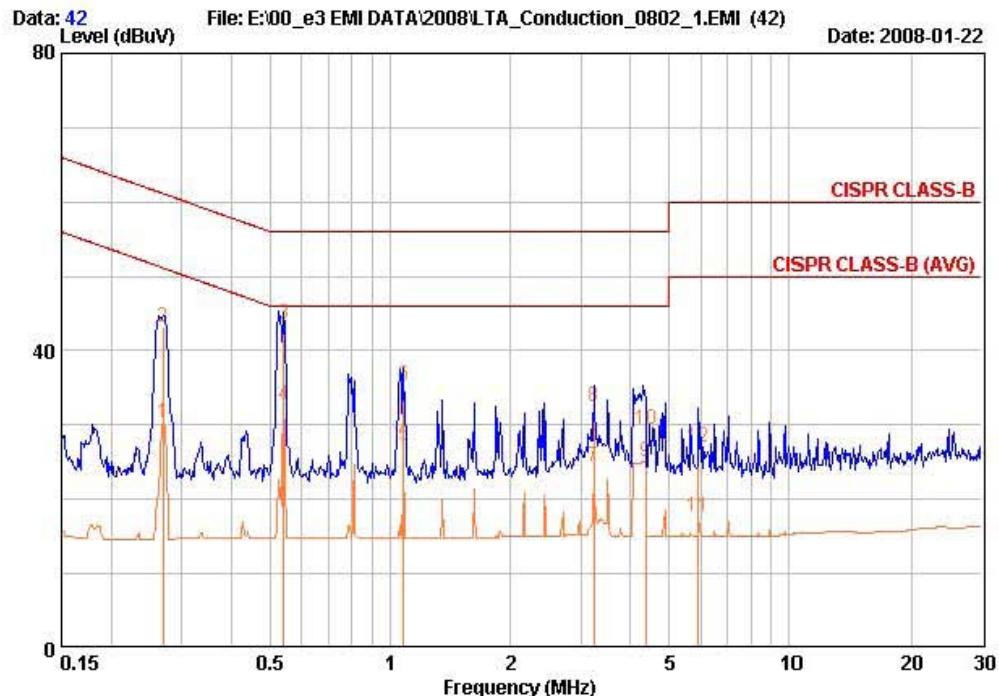

Freq MHz	RD QP		RD AV		C. F dB	Result dBuV	Result dBuV	Limit dBuV	Limit dBuV	Margin dB	Margin dB
	QP	AV	QP	AV							
0.270	42.80	30.00	0.25	43.05	43.05	30.25	61.12	51.12	18.06	20.86	
0.541	43.30	32.40	0.29	43.59	43.59	32.69	56.00	46.00	12.41	13.31	
1.082	35.00	27.02	0.32	35.32	35.32	27.34	56.00	46.00	20.68	18.66	
3.241	31.90	23.76	0.61	32.51	32.51	24.37	56.00	46.00	23.49	21.63	
4.361	28.90	24.50	0.46	29.36	29.36	24.96	56.00	46.00	26.64	21.04	
5.929	26.50	17.00	0.59	27.09	27.09	17.59	60.00	50.00	32.91	32.41	

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	8594E	3649A03649	HP	Apr-08
2	Signal Generator	8648C	3623A02597	HP	Apr-08
3	Attenuator (3dB)	8491A	37822	HP	Oct-08
4	Attenuator (10dB)	8491A	63196	HP	Oct-08
5	EMI Test Receiver	ESVD	843748/001	R&S	Aug-08
6	LISN	KNW-407	8-1430-1	Kyoritsu	Oct-08
7	Two-Line V-Network	ESH3-Z5	893045/017	R&S	Oct-08
8	RF Amplifier	8447D	2949A02670	HP	Jan-08
9	RF Amplifier	8447D	2439A09058	HP	Oct-08
10	RF Amplifier	8449B	3008A02126	HP	Apr-09
11	Test Receiver	ESHS10	828404009	R&S	Aug-08
12	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Jul-08
13	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-09
14	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-09
15	Horn Antenna	3115	00055005	ETS LINDGREN	Mar-09
16	Dipole Antenna	VHA9103	2116	Schwarzbeck	Nov-08
17	Dipole Antenna	VHA9103	2117	Schwarzbeck	Nov-08
18	Dipole Antenna	UHA9105	2261	Schwarzbeck	Nov-08
19	Dipole Antenna	UHA9105	2262	Schwarzbeck	Nov-08
20	Spectrum Analyzer	8591E	3649A05888	HP	Oct-08
21	Spectrum Analyzer	8563E	3425A02505	HP	Apr-08
22	Hygro-Thermograph	THB-36	0041557-01	ISUZU	May-08
23	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	Jun-08
24	RF Switch	MP59B	6200414971	ANRITSU	Jun-08
25	RF Switch	MP59B	6200438565	ANRITSU	Jun-08
26	Power Divider	11636A	6243	HP	Oct-08
27	DC Power Supply	6622A	3448A03079	HP	Oct-08
28	Attenuator (30dB)	11636A	6243	HP	Oct-08
29	Frequency Counter	5342A	2826A12411	HP	Apr-08
30	Power Meter	EPM-441A	GB32481702	HP	Apr-08
31	Power Sensor	8481A	2702A64048	HP	Apr-08
32	Audio Analyzer	8903B	3729A18901	HP	Oct-08
33	Modulation Analyzer	8901B	3749A05878	HP	Oct-08
34	TEMP & HUMIDITY Chamber	YJ-500	L05022	JinYoung Tech	Oct-08
35	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	Mar-09