



# TEST REPORT

**Test Report No. : UL-RPT-RP10363939JD08A**

**Manufacturer** : Panasonic Mobile Communications Development of Europe Ltd  
**Model No.** : NTT docomo P-01G/EB-4068  
**FCC ID** : UCE114061A  
**Technology** : *Bluetooth* – Basic Rate & EDR  
**Test Standard(s)** : FCC Parts 15.207, 15.209(a) & 15.247

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0.

**Date of Issue:** 02 September 2014

**Checked by:**

Ian Watch  
Senior Engineer, Radio Laboratory

**Issued by :**

pp

John Newell  
Quality Manager,  
UL VS LTD



This laboratory is accredited by UKAS.  
The tests reported herein have been  
performed in accordance with its terms  
of accreditation.

The *Bluetooth*<sup>®</sup> word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL VS LTD is under licence. Other trademarks and trade names are those of their respective owners.

---

**UL VS LTD**

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK  
Telephone: +44 (0)1256 312000  
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

---

**Table of Contents**

|   |           |
|---|-----------|
| <b>1. Customer Information.....</b>   | <b>4</b>  |
| <b>2. Summary of Testing.....</b>   | <b>5</b>  |
| 2.1. General Information  | 5         |
| 2.2. Summary of Test Results  | 5         |
| 2.3. Methods and Procedures   | 5         |
| 2.4. Deviations from the Test Specification                                       | 5         |
| <b>3. Equipment Under Test (EUT) .....</b>  | <b>6</b>  |
| 3.1. Identification of Equipment Under Test (EUT)                                 | 6         |
| 3.2. Description of EUT   | 7         |
| 3.3. Modifications Incorporated in the EUT  | 7         |
| 3.4. Additional Information Related to Testing                                    | 8         |
| 3.5. Support Equipment  | 8         |
| <b>4. Operation and Monitoring of the EUT during Testing .....</b>                | <b>9</b>  |
| 4.1. Operating Modes  | 9         |
| 4.2. Configuration and Peripherals  | 9         |
| <b>5. Measurements, Examinations and Derived Results.....</b>                     | <b>10</b> |
| 5.1. General Comments   | 10        |
| 5.2. Test Results   | 11        |
| 5.2.1. Transmitter AC Conducted Spurious Emissions                                | 11        |
| 5.2.2. Transmitter 20 dB Bandwidth  | 14        |
| 5.2.3. Transmitter Carrier Frequency Separation                                   | 19        |
| 5.2.4. Transmitter Number of Hopping Frequencies and Average Time of<br>Occupancy | 22        |
| 5.2.5. Transmitter Maximum Peak Output Power                                      | 24        |
| 5.2.6. Transmitter Radiated Emissions   | 32        |
| 5.2.7. Transmitter Band Edge Radiated Emissions                                   | 38        |
| <b>6. Measurement Uncertainty .....</b>   | <b>46</b> |
| <b>7. Report Revision History .....</b>   | <b>47</b> |

**1. Customer Information**










|                      |  |
|----------------------|--|
| <b>Company Name:</b> | Panasonic Mobile Communications Development of Europe Ltd                                  |
| <b>Address:</b>      | Panasonic House<br>Willoughby Road<br>Bracknell<br>Berkshire<br>RG12 8FP<br>United Kingdom |

## 2. Summary of Testing

### 2.1. General Information

|                                 |   |
|---------------------------------|---|
| <b>Specification Reference:</b> | 47CFR15.247   |
| <b>Specification Title:</b>     | Code of Federal Regulations Volume 47 (Telecommunications):<br>Part 15 Subpart C (Intentional Radiators) - Section 15.247             |
| <b>Specification Reference:</b> | 47CFR15.207 and 47CFR15.209   |
| <b>Specification Title:</b>     | Code of Federal Regulations Volume 47 (Telecommunications):<br>Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209 |
| <b>Site Registration:</b>       | 209735  |
| <b>Location of Testing:</b>     | UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park,<br>Basingstoke, Hampshire, RG24 8AH, United Kingdom                    |
| <b>Test Dates:</b>              | 08 August 2014 to 01 September 2014   |

### 2.2. Summary of Test Results

| FCC Reference (47CFR)   | Measurement  | Result  |
|---|--|---|
| Part 15.207   | Transmitter AC Conducted Emissions   |    |
| Part 15.247(a)(1)   | Transmitter 20 dB Bandwidth  |    |
| Part 15.247(a)(1)   | Transmitter Carrier Frequency Separation                                   |  |
| Part 15.247(a)(1)(iii)  | Transmitter Number of Hopping Frequencies<br>and Average Time of Occupancy |  |
| Part 15.247(b)(1)   | Transmitter Maximum Peak Output Power                                      |  |
| Part 15.247(d) & 15.209(a)  | Transmitter Radiated Emissions   |  |
| Part 15.247(d) & 15.209(a)  | Transmitter Band Edge Radiated Emissions                                   |  |
| <b>Key to Results</b>   |  |   |
|  = Complied  = Did not comply |  |   |

### 2.3. Methods and Procedures

|                   |   |
|-------------------|---|
| <b>Reference:</b> | ANSI C63.4 (2009)   |
| <b>Title:</b>     | American National Standard for Methods of Measurement of Radio-Noise<br>Emissions from Low-Voltage Electrical and Electronic Equipment in the Range<br>of 9 kHz to 40 GHz |
| <b>Reference:</b> | ANSI C63.10 (2009)  |
| <b>Title:</b>     | American National Standard for Testing Unlicensed Wireless Devices  |

### 2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

|                              |   |
|------------------------------|---|
| <b>Brand Name:</b>           | NTT docomo  |
| <b>Model Name or Number:</b> | P-01G/EB-4068                                       |
| <b>IMEI:</b>                 | 353758060006562 ( <i>Radiated sample #1</i> )       |
| <b>Hardware Version:</b>     | Rev C   |
| <b>Software Version:</b>     | ACPU: B-D42CS1-02.01.001<br>CCPU: D42CS1_Cv18122202 |
| <b>FCC ID:</b>               | UCE114061A  |

|                              |   |
|------------------------------|---|
| <b>Brand Name:</b>           | NTT docomo  |
| <b>Model Name or Number:</b> | P-01G/EB-4068                                       |
| <b>IMEI:</b>                 | 353758060006554 ( <i>Radiated sample #2</i> )       |
| <b>Hardware Version:</b>     | Rev C   |
| <b>Software Version:</b>     | ACPU: B-D42CS1-02.01.001<br>CCPU: D42CS1_Cv18122202 |
| <b>FCC ID:</b>               | UCE114061A  |

|                              |  |
|------------------------------|--|
| <b>Brand Name:</b>           | NTT docomo   |
| <b>Model Name or Number:</b> | P-01G/EB-4068  |
| <b>IMEI:</b>                 | 353758060006596 ( <i>Conducted sample with RF port</i> ) |
| <b>Hardware Version:</b>     | Rev C  |
| <b>Software Version:</b>     | ACPU: B-D42CS1-02.01.001<br>CCPU: D42CS1_Cv18122202      |
| <b>FCC ID:</b>               | UCE114061A   |

|                              |                                      |
|------------------------------|--------------------------------------|
| <b>Brand Name:</b>           | NTT docomo                           |
| <b>Description:</b>          | AC Adapter                           |
| <b>Model Name or Number:</b> | AC 01 (Part Number MAS-BH0008-A 002) |
| <b>Serial Number:</b>        | Not marked or stated                 |

|                              |                                 |
|------------------------------|---------------------------------|
| <b>Brand Name:</b>           | NTT docomo                      |
| <b>Description:</b>          | USB Cable with Charger Function |
| <b>Model Name or Number:</b> | 02                              |
| <b>Serial Number:</b>        | #62                             |

**Identification of Equipment Under Test (continued)**

|                              |                     |
|------------------------------|---------------------|
| <b>Brand Name:</b>           | NTT docomo          |
| <b>Description:</b>          | Stereo Earphone Set |
| <b>Model Name or Number:</b> | 01                  |
| <b>Serial Number:</b>        | #26                 |

|                              |            |
|------------------------------|------------|
| <b>Brand Name:</b>           | NTT docomo |
| <b>Description:</b>          | Battery    |
| <b>Model Name or Number:</b> | P31        |

**3.2. Description of EUT**

The Equipment Under Test was a single mode UTRA mobile phone with *Bluetooth®* (V2.0 + EDR) and RFID.

**3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

**3.4. Additional Information Related to Testing**

|  |                        |                       |                                |
|--|------------------------|-----------------------|--------------------------------|
| <b>Tested Technology:</b>              | <i>Bluetooth</i>       |                       |                                |
| <b>Power Supply Requirement:</b>       | Nominal                | 3.7 VDC               |                                |
| <b>Type of Unit:</b>                   | Transceiver            |                       |                                |
| <b>Channel Spacing:</b>                | 1 MHz                  |                       |                                |
| <b>Mode:</b>                           | Basic Rate             | Enhanced Data Rate    |                                |
| <b>Modulation:</b>                     | GFSK                   | $\pi/4$ -DQPSK        | 8DQPSK                         |
| <b>Packet Type: (Maximum Payload)</b>  | DH5                    | 2DH5                  | 3DH5                           |
| <b>Data Rate (Mbit/s):</b>             | 1                      | 2                     | 3                              |
| <b>Maximum Conducted Output Power:</b> | 0.8 dBm                |                       |                                |
| <b>Antenna Gain:</b>                   | 0.0 dBi                |                       |                                |
| <b>Transmit Frequency Range:</b>       | 2400 MHz to 2483.5 MHz |                       |                                |
| <b>Transmit Channels Tested:</b>       | <b>Channel ID</b>      | <b>Channel Number</b> | <b>Channel Frequency (MHz)</b> |
|  | Bottom                 | 0                     | 2402                           |
|  | Middle                 | 39                    | 2441                           |
|  | Top                    | 78                    | 2480                           |

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

|                              |                      |
|------------------------------|----------------------|
| <b>Brand Name:</b>           | Not marked or stated |
| <b>Description:</b>          | 2 GB Micro SD Card   |
| <b>Model Name or Number:</b> | Not marked or stated |

|                              |           |
|------------------------------|-----------|
| <b>Description:</b>          | Laptop PC |
| <b>Brand Name:</b>           | Panasonic |
| <b>Model Name or Number:</b> | CF74      |
| <b>Serial Number:</b>        | 7407      |



## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Continuously transmitting at maximum power on bottom, middle and top channels in Basic Rate (DH5 packets) or EDR (2DH5 or 3DH5 packets) as required.

### **4.2. Configuration and Peripherals**

- The EUT was placed into *Bluetooth* test mode using a laptop PC and application supplied by the customer. Once in *Bluetooth* mode test mode, a link was established to a *Bluetooth* tester which was then used to control the EUT.
- Both EDR/Basic rate modes were compared and tests were performed with the mode that presented the worst case result. For output power, bandwidth, band edge and channel separation, all modes were tested.
- Transmitter radiated spurious emissions tests were performed with the AC Charger connected to the EUT as this was found to be the worst case during pre-scans. All the accessories were individually connected and measurements made during the pre-scans to determine the worst case combination.
- Transmitter radiated spurious emissions tests were performed with the EUT transmitting in DH5 mode as this mode was found to transmit the highest power.
- The sample with IMEI 353758060006554 was used for AC conducted emissions tests.
- The sample with IMEI 353758060006596 was used for 20 dB bandwidth, carrier frequency separation, average time of occupancy tests and conducted output power tests.
- The sample with IMEI 353758060006562 was used for radiated spurious emissions tests.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

## 5.2. Test Results

### 5.2.1. Transmitter AC Conducted Spurious Emissions

#### Test Summary:

|                   |                 |            |                   |
|-------------------|-----------------|------------|-------------------|
| Test Engineer:    | Keith Tucker    | Test Date: | 01 September 2014 |
| Test Sample IMEI: | 353758060006554 |            |                   |

|                   |   |
|-------------------|---|
| FCC Reference:    | Part 15.207   |
| Test Method Used: | As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4 |

#### Environmental Conditions:

|                        |    |
|------------------------|----|
| Temperature (°C):      | 23 |
| Relative Humidity (%): | 42 |

#### Note(s):

1. The EUT was transmitting DH5 packets during the test. This mode was found to have highest transmit power.

#### Results: Live / Quasi Peak

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.155           | Neutral | 43.8               | 65.8               | 22.0        | Complied |
| 0.299           | Neutral | 29.2               | 60.3               | 31.1        | Complied |
| 0.686           | Neutral | 30.8               | 56.0               | 25.2        | Complied |
| 1.460           | Neutral | 35.6               | 56.0               | 20.4        | Complied |
| 1.775           | Neutral | 33.8               | 56.0               | 22.2        | Complied |
| 3.678           | Neutral | 33.1               | 56.0               | 22.9        | Complied |

#### Results: Live / Average

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 0.159           | Live | 35.9               | 55.5               | 19.6        | Complied |
| 0.240           | Live | 20.2               | 52.1               | 31.9        | Complied |
| 0.735           | Live | 16.4               | 46.0               | 29.6        | Complied |
| 1.149           | Live | 21.0               | 46.0               | 25.0        | Complied |
| 1.590           | Live | 28.7               | 46.0               | 17.3        | Complied |
| 3.638           | Live | 26.0               | 46.0               | 20.0        | Complied |


**Transmitter AC Conducted Spurious Emissions (continued)****Results: Neutral / Quasi Peak**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.155           | Neutral | 43.8               | 65.8               | 22.0        | Complied |
| 0.299           | Neutral | 29.2               | 60.3               | 31.1        | Complied |
| 0.686           | Neutral | 30.8               | 56.0               | 25.2        | Complied |
| 1.460           | Neutral | 35.6               | 56.0               | 20.4        | Complied |
| 1.775           | Neutral | 33.8               | 56.0               | 22.2        | Complied |
| 3.678           | Neutral | 33.1               | 56.0               | 22.9        | Complied |


**Results: Neutral / Average**

| Frequency (MHz) | Line    | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|---------|--------------------|--------------------|-------------|----------|
| 0.204           | Neutral | 30.5               | 53.4               | 22.9        | Complied |
| 0.479           | Neutral | 23.9               | 46.4               | 22.5        | Complied |
| 0.704           | Neutral | 23.5               | 46.0               | 22.5        | Complied |
| 1.406           | Neutral | 28.8               | 46.0               | 17.2        | Complied |
| 1.766           | Neutral | 27.4               | 46.0               | 18.6        | Complied |
| 3.651           | Neutral | 27.2               | 46.0               | 18.8        | Complied |

**Transmitter AC Conducted Spurious Emissions (continued)**

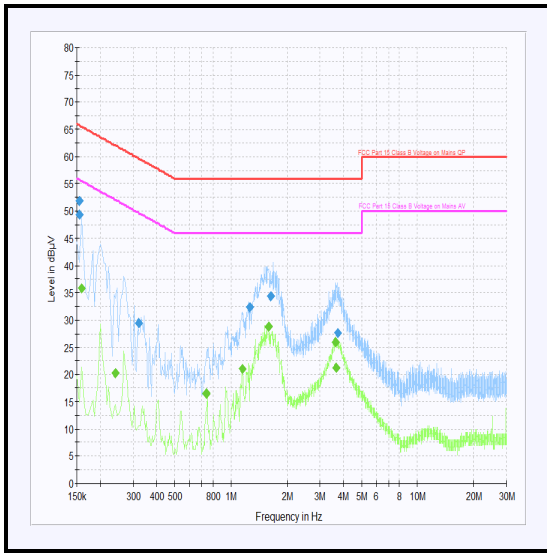

**Live**

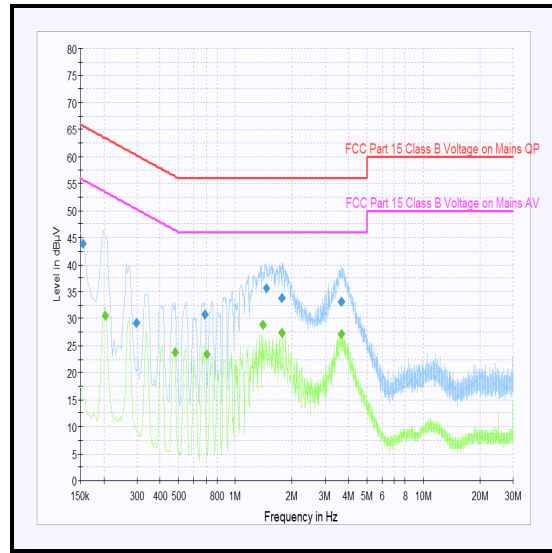

**Neutral**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**Test Equipment Used:**

| Asset No. | Instrument       | Manufacturer    | Type No.   | Serial No.  | Date Calibration Due | Cal. Interval (Months) |
|-----------|------------------|-----------------|------------|-------------|----------------------|------------------------|
| M1625     | Thermohygrometer | JM Handelpunkt  | 30.5015.06 | None stated | 31 Dec 2014          | 12                     |
| A004      | LISN             | Rohde & Schwarz | ESH3-Z5    | 890604/027  | 18 Nov 2014          | 12                     |
| A1830     | Pulse Limiter    | Rohde & Schwarz | ESH3-Z2    | 100668      | 27 Feb 2015          | 12                     |
| M1263     | Test Receiver    | Rohde & Schwarz | ESIB 7     | 100265      | 14 Oct 2014          | 12                     |

**5.2.2. Transmitter 20 dB Bandwidth****Test Summary:**

|                          |                 |                   |                |
|--------------------------|-----------------|-------------------|----------------|
| <b>Test Engineer:</b>    | Sandeep Bharat  | <b>Test Date:</b> | 08 August 2014 |
| <b>Test Sample IMEI:</b> | 353758060006596 |                   |                |

|                          |  |
|--------------------------|--|
| <b>FCC Reference:</b>    | Part 15.247(a)(1)                        |
| <b>Test Method Used:</b> | As detailed in ANSI C63.10 Section 6.9.1 |

**Environmental Conditions:**

|                               |    |
|-------------------------------|----|
| <b>Temperature (°C):</b>      | 23 |
| <b>Relative Humidity (%):</b> | 44 |


**Note(s):**

1. The test receiver resolution bandwidth was set to 10 kHz and video bandwidth 30 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to 3.5 MHz. Normal and delta markers were placed 20 dB down from the peak of the carrier. These results are documented in the tables below.
2. The test receiver was connected to the RF port on the EUT using suitable attenuation and RF cable.


**Transmitter 20 dB Bandwidth (continued)**

**Results: DH5**


| Channel | 20 dB Bandwidth (kHz) |
|---------|-----------------------|
| Bottom  | 936.699               |
| Middle  | 942.308               |
| Top     | 942.308               |

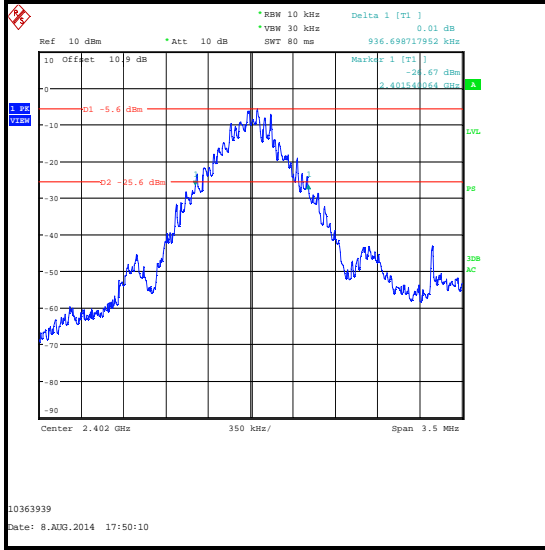

**Bottom Channel**

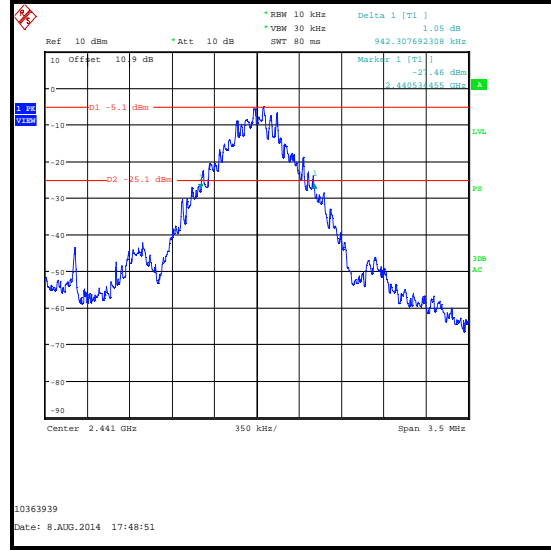

**Middle Channel**

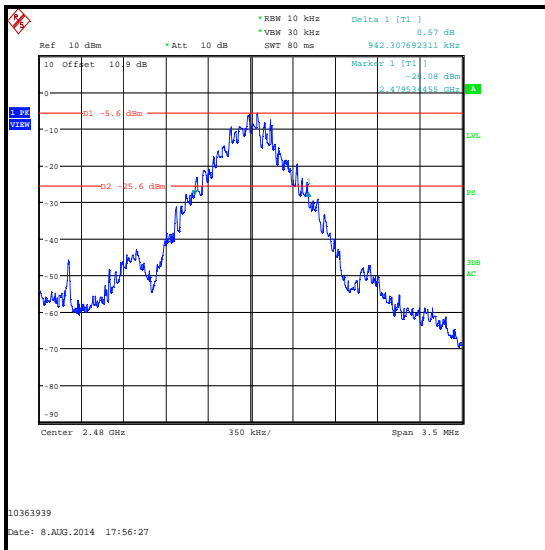

**Top Channel**

**Transmitter 20 dB Bandwidth (continued)**

**Results: 2DH5**

| Channel | 20 dB Bandwidth (kHz) |
|---------|-----------------------|
| Bottom  | 1323.718              |
| Middle  | 1329.327              |
| Top     | 1329.327              |



**Bottom Channel**



**Middle Channel**



**Top Channel**




**Transmitter 20 dB Bandwidth (continued)**

**Results: 3DH5**


| Channel | 20 dB Bandwidth (kHz) |
|---------|-----------------------|
| Bottom  | 1273.237              |
| Middle  | 1284.455              |
| Top     | 1273.237              |



**Bottom Channel**

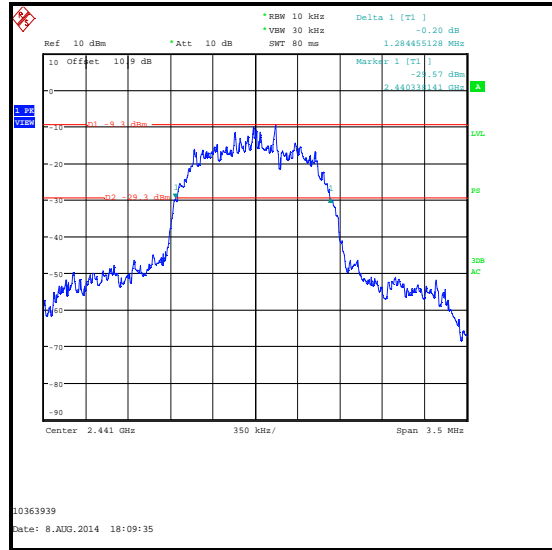

**Middle Channel**

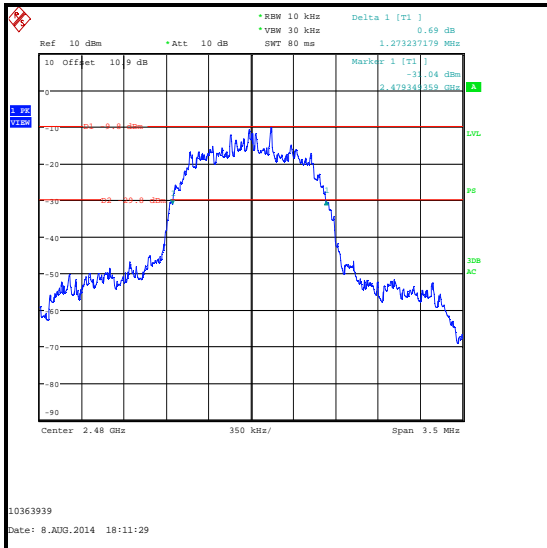

**Top Channel**

**Transmitter 20 dB Bandwidth (continued)****Test Equipment Used:**

| <b>Asset No.</b> | <b>Instrument</b>   | <b>Manufacturer</b> | <b>Type No.</b> | <b>Serial No.</b> | <b>Date Calibration Due</b> | <b>Cal. Interval (Months)</b> |
|------------------|---------------------|---------------------|-----------------|-------------------|-----------------------------|-------------------------------|
| M1659            | Thermohygrometer    | JM Handelpunkt      | 30.5015.13      | None stated       | 14 Mar 2015                 | 12                            |
| M1630            | Test Receiver       | Rohde & Schwarz     | ESU40           | 100233            | 13 Mar 2015                 | 12                            |
| A2032            | Directional Coupler | Narda               | 4243B           | 03547             | Calibrated before use       | 12                            |

**5.2.3. Transmitter Carrier Frequency Separation****Test Summary:**

|                   |                 |            |                |
|-------------------|-----------------|------------|----------------|
| Test Engineer:    | Sandeep Bharat  | Test Date: | 08 August 2014 |
| Test Sample IMEI: | 353758060006596 |            |                |

|                   |  |
|-------------------|--|
| FCC Reference:    | Part 15.247(a)(1)                        |
| Test Method Used: | As detailed in ANSI C63.10 Section 7.7.2 |

**Environmental Conditions:**


|                        |    |
|------------------------|----|
| Temperature (°C):      | 23 |
| Relative Humidity (%): | 44 |

**Note(s):**

1. The 20 dB bandwidth measured for the middle channel operating at 2441 MHz was used to calculate the limit.
2. The test receiver measurement bandwidths were set to 30 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 3 MHz. A marker was placed at the peak of one channel and then a delta marker was placed in the peak of the adjacent hopping channel, the results are recorded in the table below.

**Results: DH5**


| Carrier Frequency Separation (kHz) | Limit ( $2/3$ of 20 dB BW) (kHz) | Margin (kHz) | Result   |
|------------------------------------|----------------------------------|--------------|----------|
| 1000.000                           | 628.205                          | 371.795      | Complied |

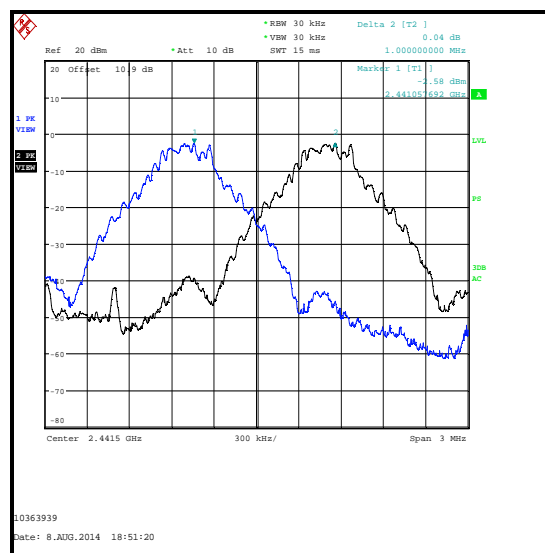

**Transmitter Carrier Frequency Separation (continued)**

**Results: 2DH5**


| Carrier Frequency Separation (kHz) | Limit ( $2/3$ of 20 dB BW) (kHz) | Margin (kHz) | Result   |
|------------------------------------|----------------------------------|--------------|----------|
| 1000.000                           | 886.218                          | 113.782      | Complied |

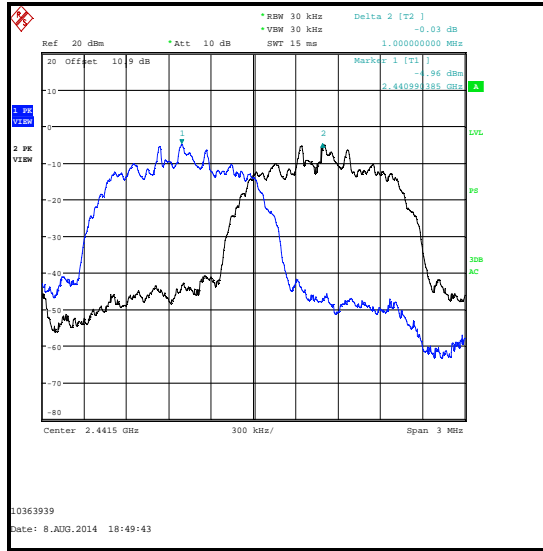

**Transmitter Carrier Frequency Separation (continued)**

**Results: 3DH5**

| Carrier Frequency Separation (kHz) | Limit ( $2/3$ of 20 dB BW) (kHz) | Margin (kHz) | Result   |
|------------------------------------|----------------------------------|--------------|----------|
| 1004.808                           | 856.303                          | 148.505      | Complied |

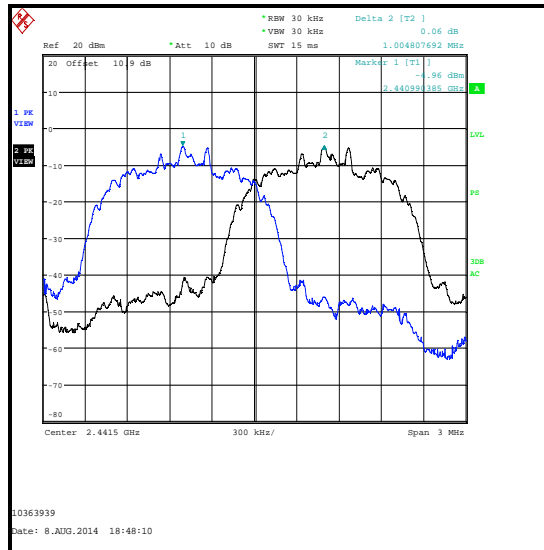

**Test Equipment Used:**

| Asset No. | Instrument          | Manufacturer    | Type No.   | Serial No.  | Date Calibration Due  | Cal. Interval (Months) |
|-----------|---------------------|-----------------|------------|-------------|-----------------------|------------------------|
| M1659     | Thermohygrometer    | JM Handelpunkt  | 30.5015.13 | None stated | 14 Mar 2015           | 12                     |
| M1630     | Test Receiver       | Rohde & Schwarz | ESU40      | 100233      | 13 Mar 2015           | 12                     |
| A2032     | Directional Coupler | Narda           | 4243B      | 03547       | Calibrated before use | 12                     |

**5.2.4. Transmitter Number of Hopping Frequencies and Average Time of Occupancy****Test Summary:**

|                          |                 |                   |                |
|--------------------------|-----------------|-------------------|----------------|
| <b>Test Engineer:</b>    | Sandeep Bharat  | <b>Test Date:</b> | 08 August 2014 |
| <b>Test Sample IMEI:</b> | 353758060006596 |                   |                |

|                          |  |
|--------------------------|--|
| <b>FCC Reference:</b>    | Part 15.247(a)(1)(iii)                           |
| <b>Test Method Used:</b> | As detailed in ANSI C63.10 Section 7.7.3 & 7.7.4 |

**Environmental Conditions:**

|                               |    |
|-------------------------------|----|
| <b>Temperature (°C):</b>      | 23 |
| <b>Relative Humidity (%):</b> | 44 |


**Note(s):**

1. Tests were performed to identify the average time of occupancy in number of channels (79) x 0.4 seconds. The calculated period is 31.6 seconds.
2. The test receiver was set up for the Number of Hopping Frequencies measurement as follows: the resolution bandwidth was set to 1 MHz and video bandwidth of 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 83.5 MHz.
3. The test receiver was set up for the Pulse Length measurement as follows: the resolution bandwidth was set to 1 MHz and video bandwidth of 3 MHz. A peak detector was used and sweep time was set to auto with a span of zero Hz. The test receiver was set to trigger at 1 ms, with a marker placed at the start of the emission and a delta marked place at the end of the emission. The emission width is recorded in the table below.
4. The test receiver was set up for the Number of Hopping Frequencies in 32 seconds measurement as follows: the resolution bandwidth was set to 1 MHz and video bandwidth of 3 MHz. A peak detector was used and sweep time was set to 32 seconds. The EUT was set to transmit in a hopping frequency mode with zero span. The total number of hopping frequencies was recorded in the table below.
5. The test receiver was connected to the RF port on the EUT using suitable attenuation and RF cable.


**Results:**

| <b>Pulse Length (µs)</b> | <b>Number of Hops in 31.6 Seconds</b> | <b>Average Time of Occupancy (s)</b> | <b>Limit (s)</b> | <b>Margin (s)</b> | <b>Result</b> |
|--------------------------|---------------------------------------|--------------------------------------|------------------|-------------------|---------------|
| 2900.641                 | 97                                    | 0.281                                | 0.4              | 0.119             | Complied      |


**Transmitter Number of Hopping Frequencies and Average Time of Occupancy (continued)**

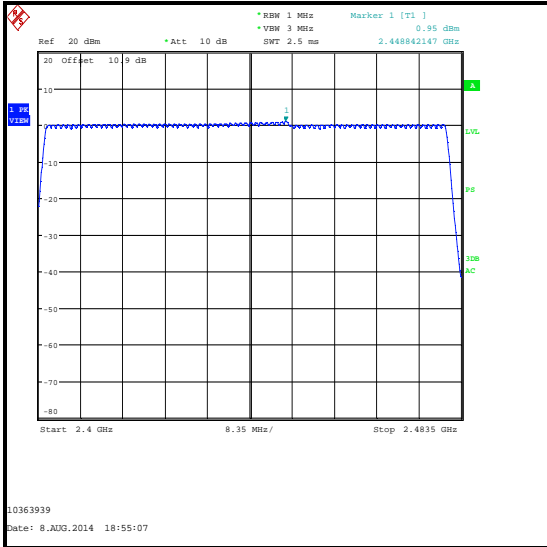

**Number of Hopping Frequencies**

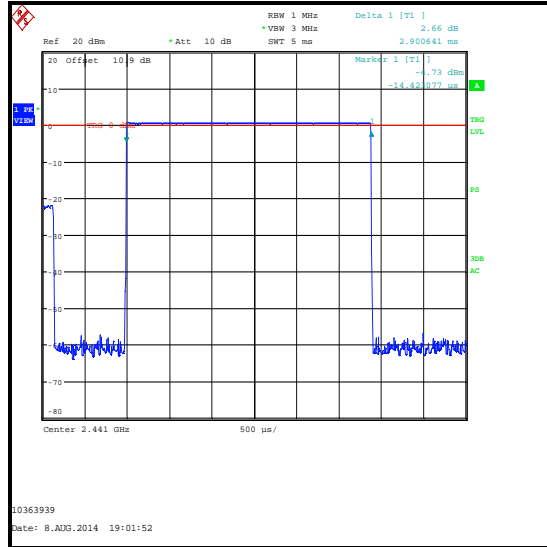

**Emission Width**

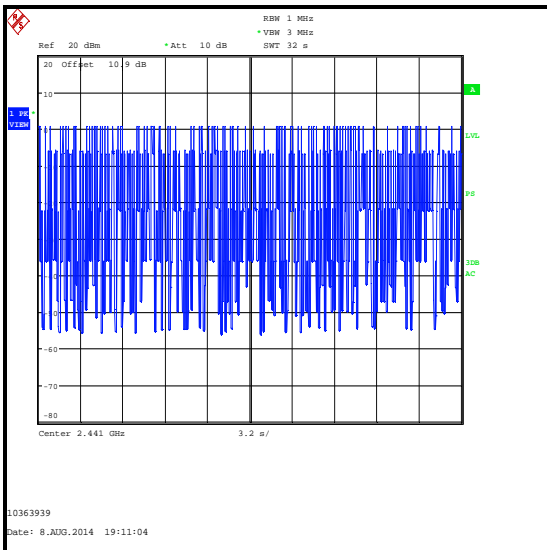

**Number of Hopping Frequencies in 32 s**

**Test Equipment Used:**

| Asset No. | Instrument          | Manufacturer    | Type No.   | Serial No.  | Date Calibration Due  | Cal. Interval (Months) |
|-----------|---------------------|-----------------|------------|-------------|-----------------------|------------------------|
| M1659     | Thermohygrometer    | JM Handelspunkt | 30.5015.13 | None stated | 14 Mar 2015           | 12                     |
| M1630     | Test Receiver       | Rohde & Schwarz | ESU40      | 100233      | 13 Mar 2015           | 12                     |
| A2032     | Directional Coupler | Narda           | 4243B      | 03547       | Calibrated before use | 12                     |

**5.2.5. Transmitter Maximum Peak Output Power****Test Summary:**

|                          |                 |                   |                |
|--------------------------|-----------------|-------------------|----------------|
| <b>Test Engineer:</b>    | Sandeep Bharat  | <b>Test Date:</b> | 08 August 2014 |
| <b>Test Sample IMEI:</b> | 353758060006596 |                   |                |

|                          |   |
|--------------------------|---|
| <b>FCC Reference:</b>    | Part 15.247(b)(1)                         |
| <b>Test Method Used:</b> | As detailed in ANSI C63.10 Section 6.10.1 |

**Environmental Conditions:**

|                               |    |
|-------------------------------|----|
| <b>Temperature (°C):</b>      | 23 |
| <b>Relative Humidity (%):</b> | 44 |

**Note(s):**

1. The test receiver resolution bandwidth was set to greater than the 20 dB bandwidth of the signal and the video bandwidth was set to greater than the resolution bandwidth. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to approximately 5 times the 20 dB bandwidth of the signal. A marker was placed at the peak of the signal and the results recorded in the tables below.
2. The test receiver was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF offset level was entered on the test receiver to compensate for the loss of the attenuator and RF cable.




**Transmitter Maximum Peak Output Power (continued)****Results: DH5**

| Channel | Conducted Peak Power (dBm) | Conducted Peak Power Limit (dBm) | Margin (dB) | Result   |
|---------|----------------------------|----------------------------------|-------------|----------|
| Bottom  | 0.2                        | 30.0                             | 29.8        | Complied |
| Middle  | 0.8                        | 30.0                             | 29.2        | Complied |
| Top     | 0.3                        | 30.0                             | 29.7        | Complied |


| Channel | Conducted Peak Power (dBm) | Declared Antenna Gain (dBi) | EIRP (dBm) | De Facto EIRP Limit (dBm) | Margin (dB) | Result   |
|---------|----------------------------|-----------------------------|------------|---------------------------|-------------|----------|
| Bottom  | 0.2                        | 0.0                         | 0.2        | 36.0                      | 35.8        | Complied |
| Middle  | 0.8                        | 0.0                         | 0.8        | 36.0                      | 35.2        | Complied |
| Top     | 0.3                        | 0.0                         | 0.3        | 36.0                      | 35.7        | Complied |

### Transmitter Maximum Peak Output Power (continued)


#### Results: DH5

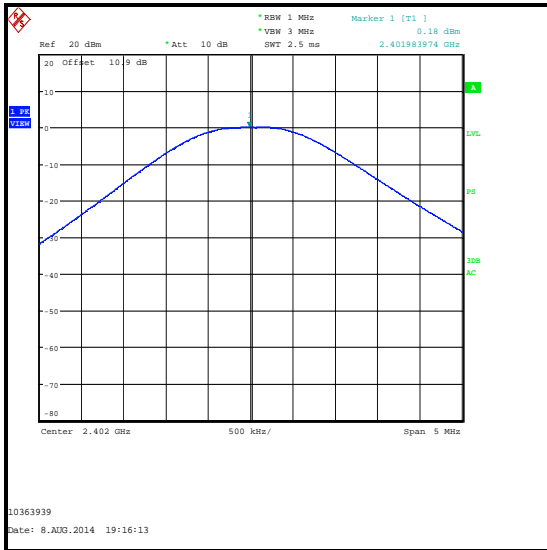

Bottom Channel

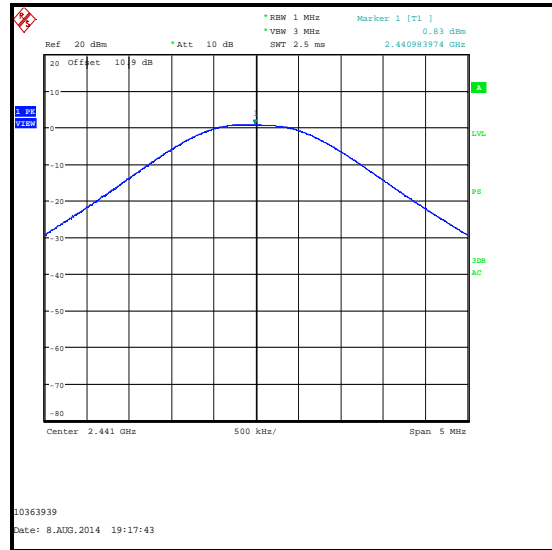

Middle Channel

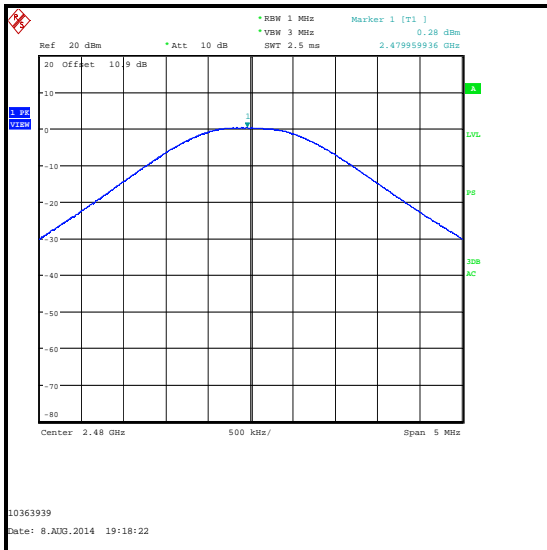

Top Channel


**Transmitter Maximum Peak Output Power (continued)****Results: 2DH5**

| Channel | Conducted Peak Power (dBm) | Conducted Peak Power Limit (dBm) | Margin (dB) | Result   |
|---------|----------------------------|----------------------------------|-------------|----------|
| Bottom  | -1.0                       | 21.0                             | 22.0        | Complied |
| Middle  | -0.3                       | 21.0                             | 21.3        | Complied |
| Top     | -0.8                       | 21.0                             | 21.8        | Complied |


| Channel | Conducted Peak Power (dBm) | Declared Antenna Gain (dBi) | EIRP (dBm) | De Facto EIRP Limit (dBm) | Margin (dB) | Result   |
|---------|----------------------------|-----------------------------|------------|---------------------------|-------------|----------|
| Bottom  | -1.0                       | 0.0                         | -1.0       | 27.0                      | 28.0        | Complied |
| Middle  | -0.3                       | 0.0                         | -0.3       | 27.0                      | 27.3        | Complied |
| Top     | -0.8                       | 0.0                         | -0.8       | 27.0                      | 27.8        | Complied |

**Transmitter Maximum Peak Output Power (continued)**


**Results: 2DH5**

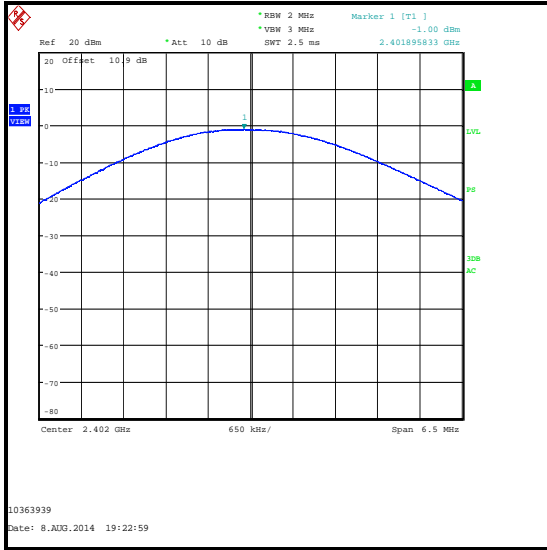

**Bottom Channel**

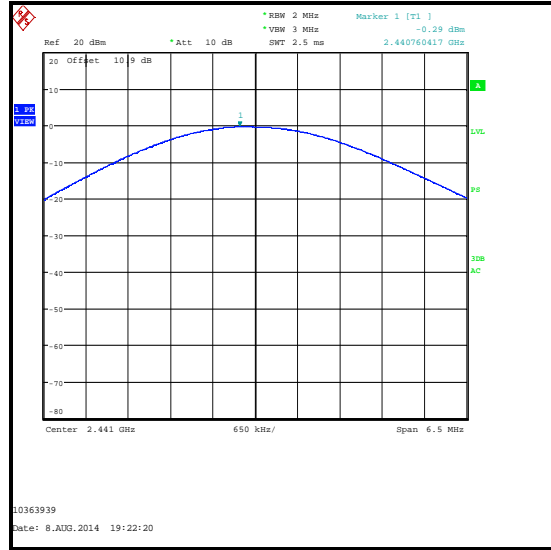

**Middle Channel**

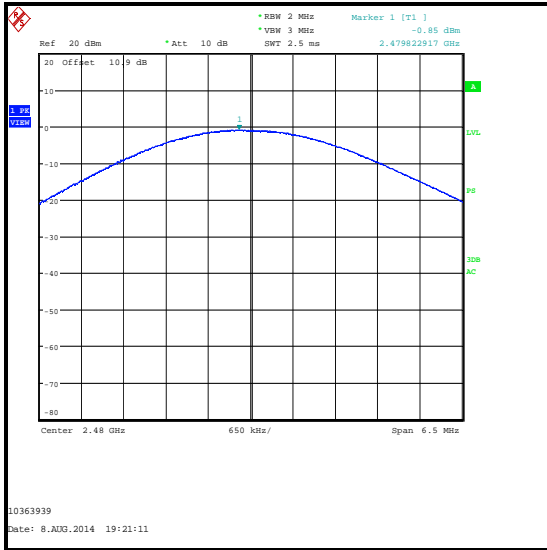

**Top Channel**


**Transmitter Maximum Peak Output Power (continued)****Results: 3DH5**

| Channel | Conducted Peak Power (dBm) | Conducted Peak Power Limit (dBm) | Margin (dB) | Result   |
|---------|----------------------------|----------------------------------|-------------|----------|
| Bottom  | -0.5                       | 21.0                             | 21.5        | Complied |
| Middle  | 0.1                        | 21.0                             | 20.9        | Complied |
| Top     | -0.4                       | 21.0                             | 21.4        | Complied |


| Channel | Conducted Peak Power (dBm) | Declared Antenna Gain (dBi) | EIRP (dBm) | De Facto EIRP Limit (dBm) | Margin (dB) | Result   |
|---------|----------------------------|-----------------------------|------------|---------------------------|-------------|----------|
| Bottom  | -0.5                       | 0.0                         | -0.5       | 27.0                      | 27.5        | Complied |
| Middle  | 0.1                        | 0.0                         | 0.1        | 27.0                      | 26.9        | Complied |
| Top     | -0.4                       | 0.0                         | -0.4       | 27.0                      | 27.4        | Complied |

**Transmitter Maximum Peak Output Power (continued)**


**Results: 3DH5**

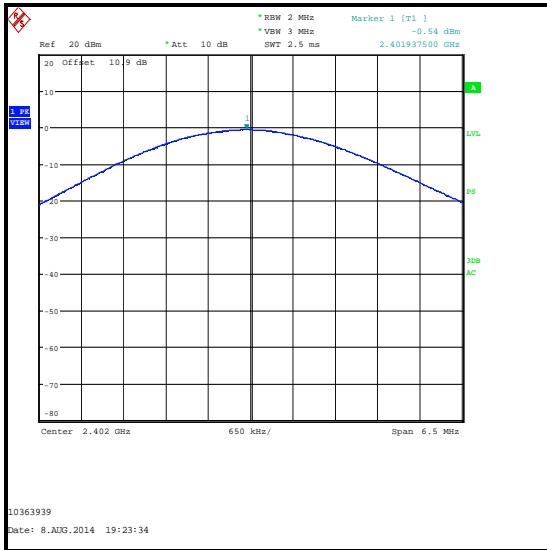

**Bottom Channel**

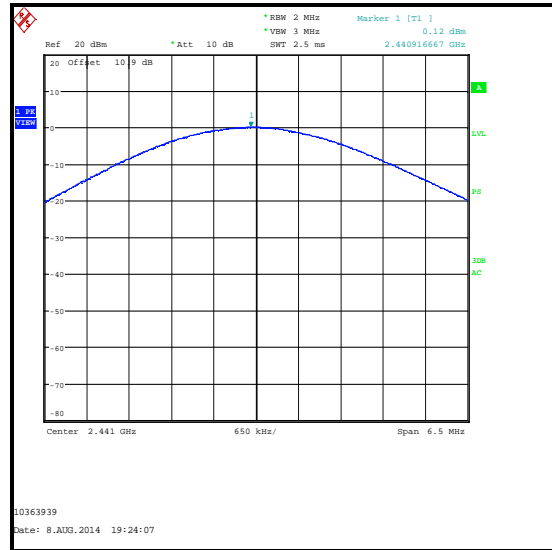

**Middle Channel**

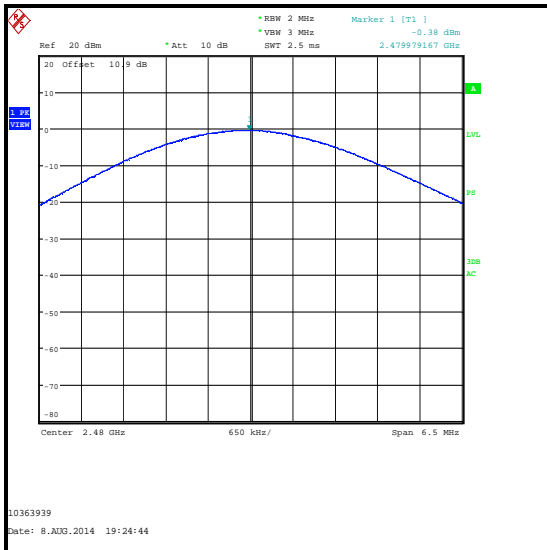

**Top Channel**

**Transmitter Maximum Peak Output Power (continued)****Test Equipment Used:**

| <b>Asset No.</b> | <b>Instrument</b>   | <b>Manufacturer</b> | <b>Type No.</b> | <b>Serial No.</b> | <b>Date Calibration Due</b> | <b>Cal. Interval (Months)</b> |
|------------------|---------------------|---------------------|-----------------|-------------------|-----------------------------|-------------------------------|
| M1659            | Thermohygrometer    | JM Handelpunkt      | 30.5015.13      | None stated       | 14 Mar 2015                 | 12                            |
| M1630            | Test Receiver       | Rohde & Schwarz     | ESU40           | 100233            | 13 Mar 2015                 | 12                            |
| G0606            | Signal Generator    | Rohde & Schwarz     | SMIQ 03B        | 832870/054        | 15 Jan 2015                 | 12                            |
| A2032            | Directional Coupler | Narda               | 4243B           | 03547             | Calibrated before use       | 12                            |

**5.2.6. Transmitter Radiated Emissions****Test Summary:**

|                          |                 |                   |                |
|--------------------------|-----------------|-------------------|----------------|
| <b>Test Engineer:</b>    | Sandeep Bharat  | <b>Test Date:</b> | 15 August 2014 |
| <b>Test Sample IMEI:</b> | 353758060006562 |                   |                |

|                          |  |
|--------------------------|--|
| <b>FCC Reference:</b>    | Parts 15.247(d) & 15.209(a)  |
| <b>Test Method Used:</b> | As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4 |
| <b>Frequency Range:</b>  | 30 MHz to 1000 MHz   |

**Environmental Conditions:**

|                               |    |
|-------------------------------|----|
| <b>Temperature (°C):</b>      | 23 |
| <b>Relative Humidity (%):</b> | 41 |


**Note(s):**

1. Transmitter radiated spurious emissions tests were performed with the EUT transmitting DH5 packets as this was found to transmit the highest power and therefore deemed worst case.
2. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
3. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the top channel only.
4. All emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor. Therefore the highest noise floor reading of the measuring receiver was recorded in the table below.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

**Results: Quasi-Peak / DH5**

| Frequency (MHz) | Antenna Polarity | Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|----------------------|----------------------|-------------|----------|
| 175.085         | Horizontal       | 27.3                 | 43.5                 | 16.2        | Complied |

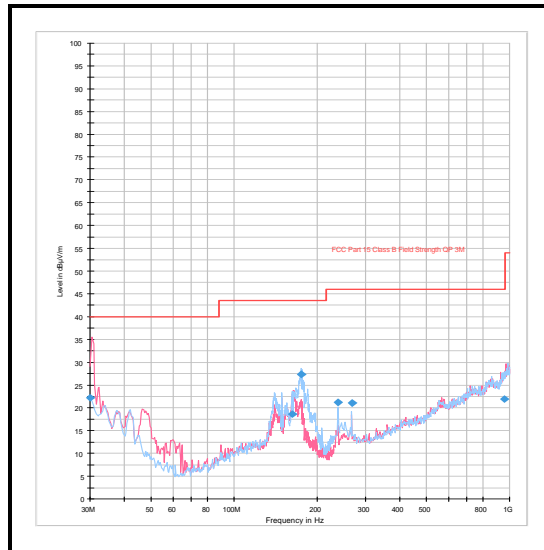

**Transmitter Radiated Emissions (continued)**

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

**Test Equipment Used:**

| Asset No. | Instrument       | Manufacturer    | Type No.   | Serial No.  | Date Calibration Due | Cal. Interval (Months) |
|-----------|------------------|-----------------|------------|-------------|----------------------|------------------------|
| M1622     | Thermohygrometer | JM Handelspunkt | 30.5015.06 | None stated | 31 Dec 2014          | 12                     |
| K0001     | 5m RSE Chamber   | Rainford EMC    | N/A        | N/A         | 26 Nov 2014          | 12                     |
| A1834     | Attenuator       | Hewlett Packard | 8491B      | 10444       | 15 Nov 2014          | 12                     |
| G0543     | Amplifier        | Sonoma          | 310N       | 230801      | 19 Aug 2014          | 3                      |
| M1273     | Test Receiver    | Rohde & Schwarz | ESIB 26    | 100275      | 15 Feb 2015          | 12                     |
| A490      | Antenna          | Chase           | CBL6111A   | 1590        | 29 Apr 2015          | 12                     |

**Transmitter Radiated Emissions (continued)****Test Summary:**

|                          |                 |                   |                |
|--------------------------|-----------------|-------------------|----------------|
| <b>Test Engineer:</b>    | Sandeep Bharat  | <b>Test Date:</b> | 15 August 2014 |
| <b>Test Sample IMEI:</b> | 353758060006562 |                   |                |

|                          |  |
|--------------------------|--|
| <b>FCC Reference:</b>    | Parts 15.247(d) & 15.209(a)  |
| <b>Test Method Used:</b> | As detailed in ANSI C63.10 Sections 6.3 and 6.6 referencing ANSI C63.4 |
| <b>Frequency Range:</b>  | 1 GHz to 25 GHz  |

**Environmental Conditions:**

|                               |    |
|-------------------------------|----|
| <b>Temperature (°C):</b>      | 22 |
| <b>Relative Humidity (%):</b> | 46 |





**Note(s):**

1. Transmitter radiated spurious emissions tests were performed with the EUT transmitting DH5 packets as this was found to transmit the highest power and therefore deemed worst case.
2. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
3. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table below.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.




**Results: Peak / DH5**

| Frequency (MHz) | Antenna Polarity | Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|----------------------|----------------------|-------------|----------|
| 3990.385        | Horizontal       | 56.7                 | 74.0                 | 17.3        | Complied |

**Transmitter Radiated Emissions (continued)**

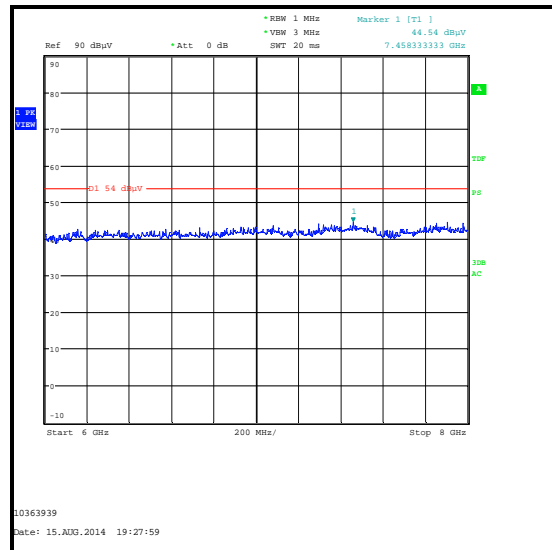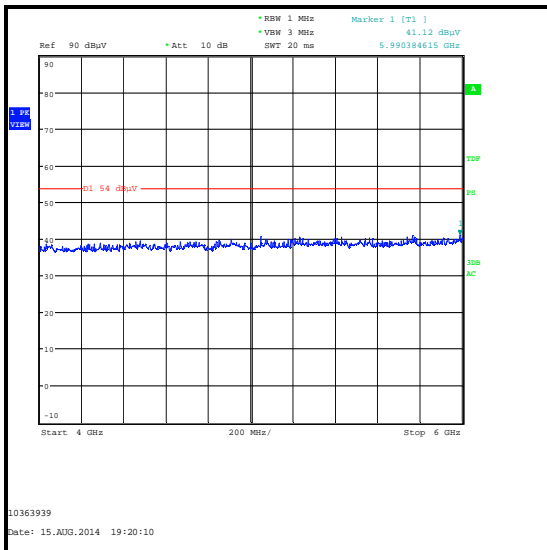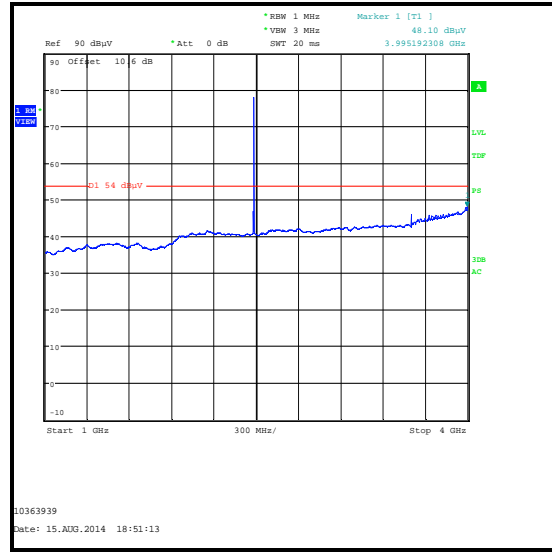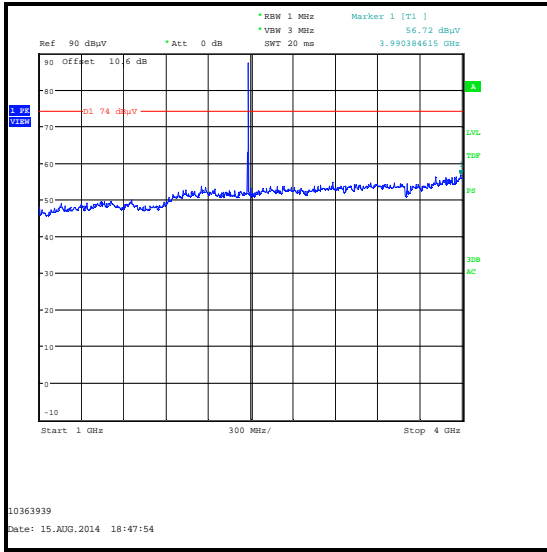

**Transmitter Radiated Emissions (continued)**

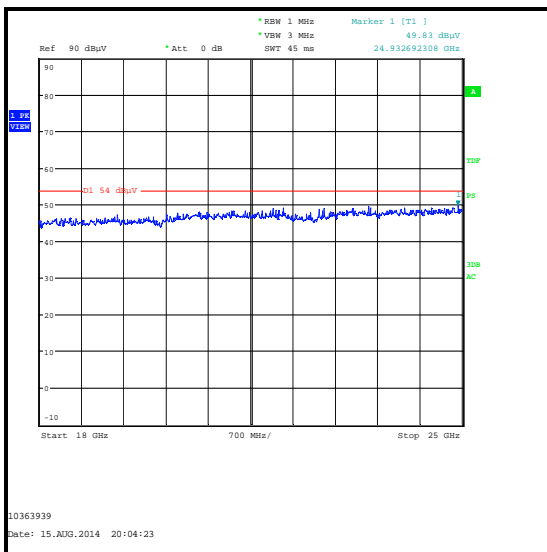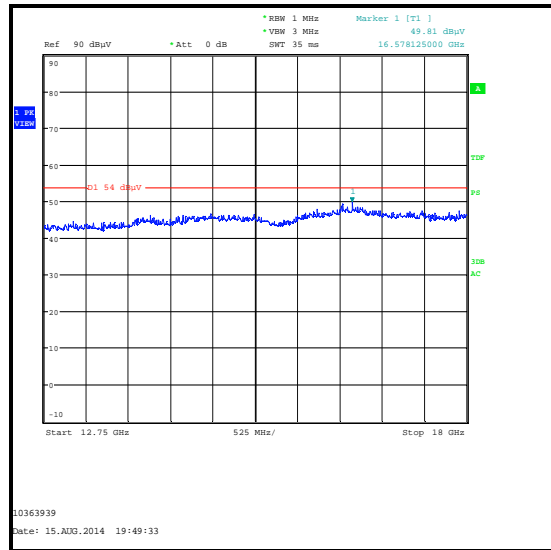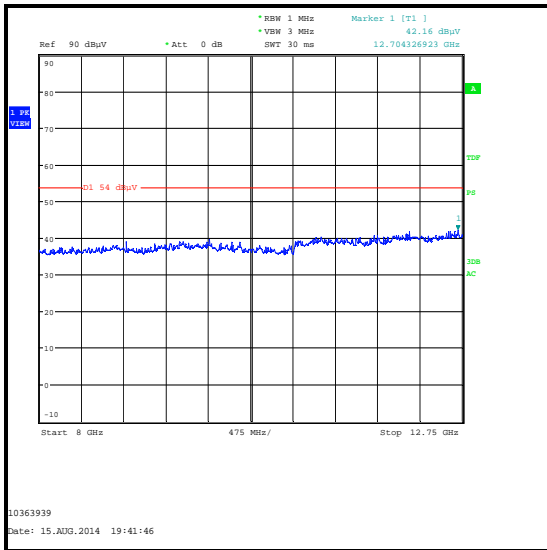

**Transmitter Radiated Emissions (continued)****Test Equipment Used:**

| Asset No. | Instrument       | Manufacturer      | Type No.   | Serial No.  | Date Calibration Due | Cal. Interval (Months) |
|-----------|------------------|-------------------|------------|-------------|----------------------|------------------------|
| M1656     | Thermohygrometer | JM Handlungspunkt | 30.5015.13 | None stated | 14 Mar 2015          | 12                     |
| K0002     | 3m RSE Chamber   | Rainford EMC      | N/A        | N/A         | 14 Nov 2014          | 12                     |
| M1874     | Test Receiver    | Rohde & Schwarz   | ESU26      | 100553      | 13 May 2015          | 12                     |
| A1534     | Pre Amplifier    | Hewlett Packard   | 8449B      | 3008A00405  | 18 May 2015          | 12                     |
| A1818     | Antenna          | EMCO              | 3115       | 00075692    | 14 Nov 2014          | 12                     |
| A253      | Antenna          | Flann Microwave   | 12240-20   | 128         | 14 Nov 2014          | 12                     |
| A254      | Antenna          | Flann Microwave   | 14240-20   | 139         | 14 Nov 2014          | 12                     |
| A255      | Antenna          | Flann Microwave   | 16240-20   | 519         | 14 Nov 2014          | 12                     |
| A256      | Antenna          | Flann Microwave   | 18240-20   | 400         | 14 Nov 2014          | 12                     |
| A436      | Antenna          | Flann Microwave   | 20240-20   | 330         | 14 Nov 2014          | 12                     |
| A1396     | Attenuator       | Huber & Suhner    | 6810.17.B  | 757987      | 02 May 2015          | 12                     |

**5.2.7. Transmitter Band Edge Radiated Emissions****Test Summary:**

|                          |                 |                   |                |
|--------------------------|-----------------|-------------------|----------------|
| <b>Test Engineer:</b>    | Sandeep Bharat  | <b>Test Date:</b> | 29 August 2014 |
| <b>Test Sample IMEI:</b> | 353758060006562 |                   |                |

|                          |  |
|--------------------------|--|
| <b>FCC Reference:</b>    | Parts 15.247(d) & 15.209(a)              |
| <b>Test Method Used:</b> | As detailed in ANSI C63.10 Section 6.9.2 |

**Environmental Conditions:**

|                               |    |
|-------------------------------|----|
| <b>Temperature (°C):</b>      | 24 |
| <b>Relative Humidity (%):</b> | 46 |

**Note(s):**


1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. For the lower band edge measurements: As the lower band edge falls within the non-restricted band only peak measurements are required. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent band (where a higher level emission was present). Marker frequencies and levels were recorded.
3. For the upper band edge measurements: As the upper band edge falls within restricted band both peak and average measurements were recorded by placing a marker at the edge of the band (2483.5 MHz). For peak measurements the test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. For average measurements the test receiver resolution bandwidth was set to 1 MHz and video bandwidth 10 Hz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent band (where a higher level emission was present). Marker frequencies and levels were recorded.
4. \* -20 dBc limit.

**Transmitter Band Edge Radiated Emissions (continued)**


**Results: Static Mode / DH5**

| Frequency (MHz) | Antenna Polarity | Peak Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|---------------------------|----------------------|-------------|----------|
| 2400.0          | Horizontal       | 39.8                      | 63.6*                | 23.8        | Complied |
| 2483.5          | Horizontal       | 52.6                      | 74.0                 | 21.4        | Complied |


| Frequency (MHz) | Antenna Polarity | Average Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|------------------------------|----------------------|-------------|----------|
| 2483.5          | Horizontal       | 42.0                         | 54.0                 | 12.0        | Complied |

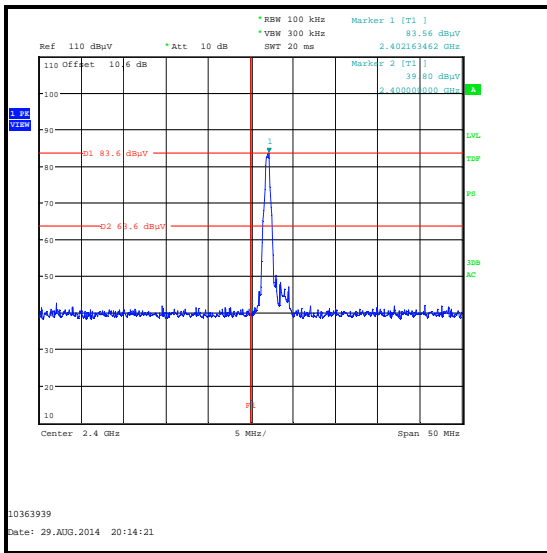

Lower Band Edge Peak Static

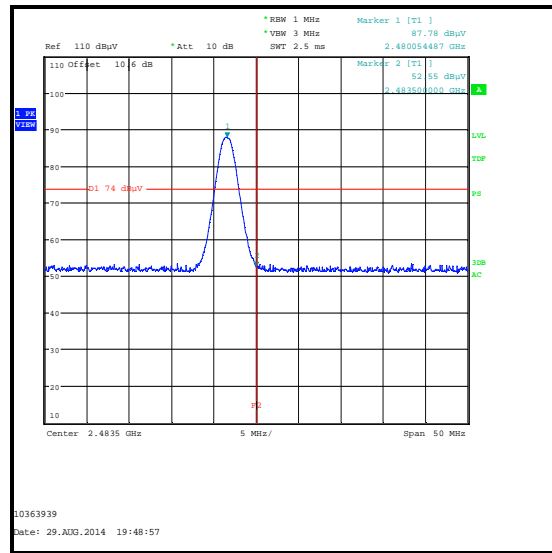

Upper Band Edge Peak Static

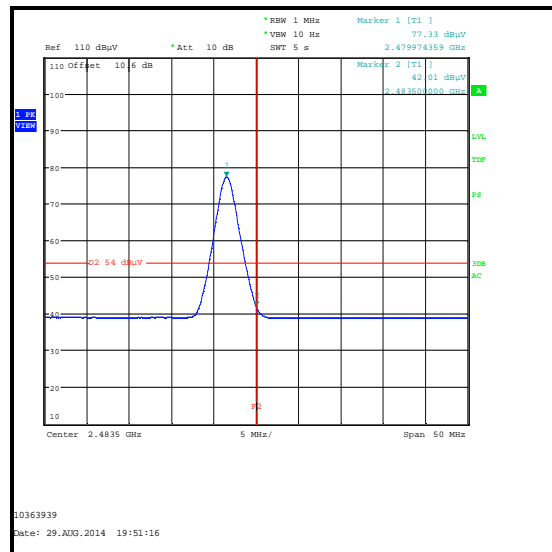


Upper Band Edge Average Static

**Transmitter Band Edge Radiated Emissions (continued)**


**Results: Hopping Mode / DH5**

| Frequency (MHz) | Antenna Polarity | Peak Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|---------------------------|----------------------|-------------|----------|
| 2400.0          | Horizontal       | 40.7                      | 64.6*                | 23.9        | Complied |
| 2483.5          | Horizontal       | 52.1                      | 74.0                 | 21.9        | Complied |


| Frequency (MHz) | Antenna Polarity | Average Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|------------------------------|----------------------|-------------|----------|
| 2483.5          | Horizontal       | 38.8                         | 54.0                 | 15.2        | Complied |

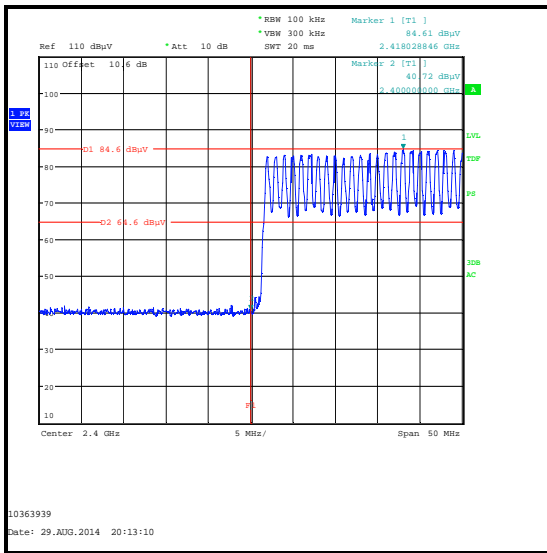

**Lower Band Edge Peak Hopping**

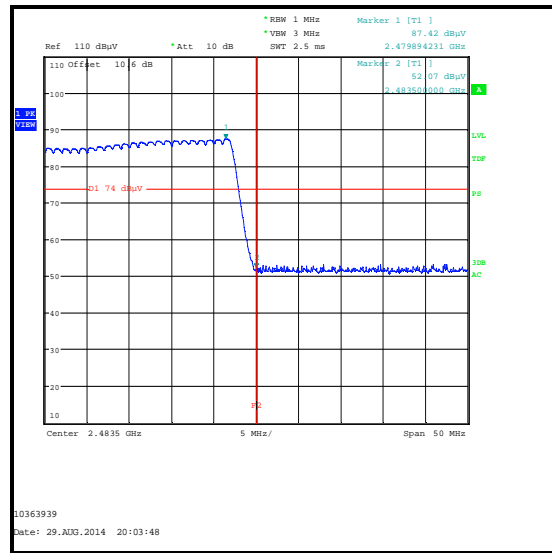

**Upper Band Edge Peak Hopping**

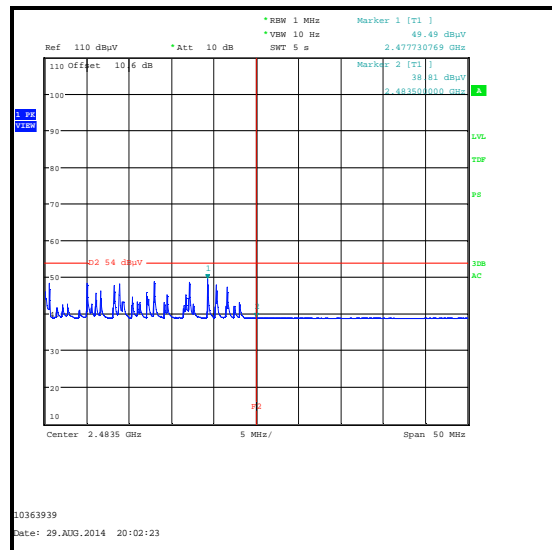

**Upper Band Edge Average Hopping**




**Transmitter Band Edge Radiated Emissions (continued)**


**Results: Static Mode / 2DH5**

| Frequency (MHz) | Antenna Polarity | Peak Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|---------------------------|----------------------|-------------|----------|
| 2400.0          | Horizontal       | 42.8                      | 61.0*                | 18.2        | Complied |
| 2483.5          | Horizontal       | 51.7                      | 74.0                 | 22.3        | Complied |


| Frequency (MHz) | Antenna Polarity | Average Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|------------------------------|----------------------|-------------|----------|
| 2483.5          | Horizontal       | 40.9                         | 54.0                 | 13.1        | Complied |

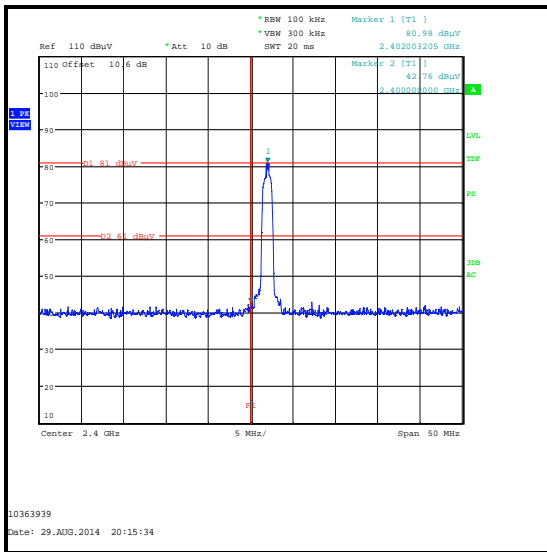

**Lower Band Edge Peak Static**

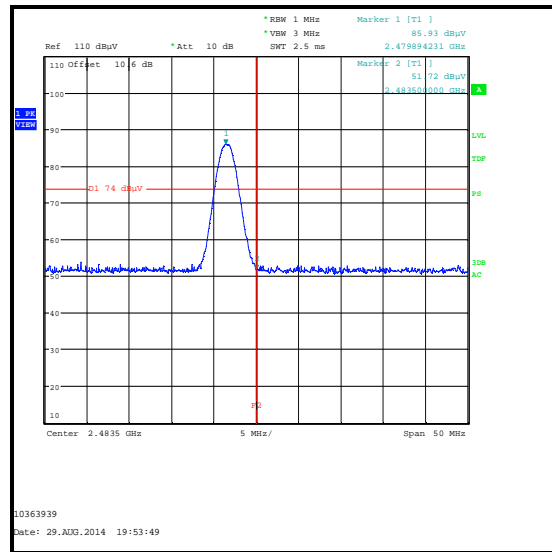

**Upper Band Edge Peak Static**

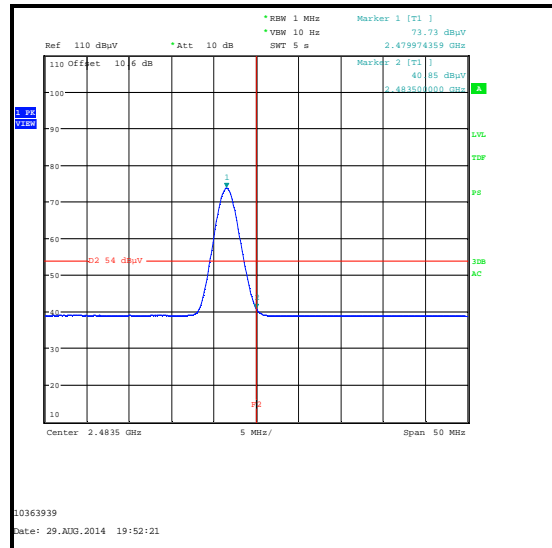


**Upper Band Edge Average Static**

**Transmitter Band Edge Radiated Emissions (continued)**


**Results: Hopping Mode / 2DH5**

| Frequency (MHz) | Antenna Polarity | Peak Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|---------------------------|----------------------|-------------|----------|
| 2400.0          | Horizontal       | 43.2                      | 62.4*                | 19.2        | Complied |
| 2483.5          | Horizontal       | 50.5                      | 74.0                 | 23.5        | Complied |


| Frequency (MHz) | Antenna Polarity | Average Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|------------------------------|----------------------|-------------|----------|
| 2483.5          | Horizontal       | 38.8                         | 54.0                 | 15.2        | Complied |

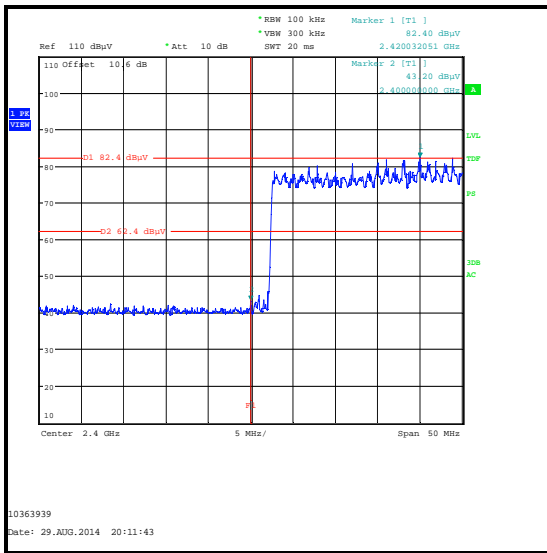

**Lower Band Edge Peak Hopping**

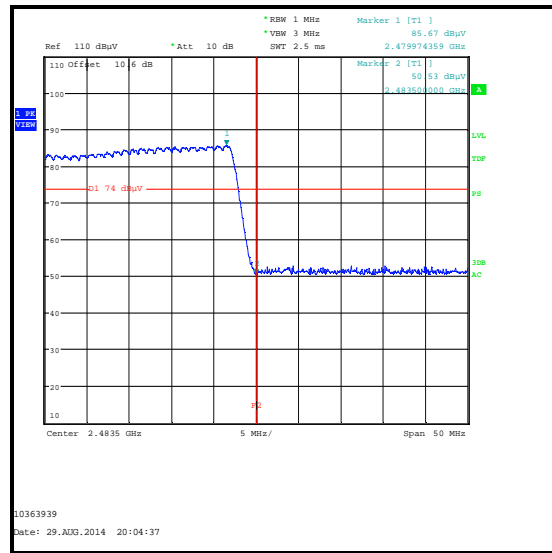

**Upper Band Edge Peak Hopping**

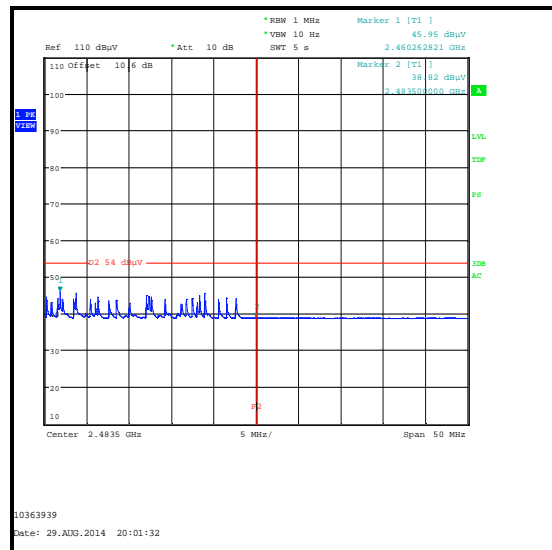


**Upper Band Edge Average Hopping**

**Transmitter Band Edge Radiated Emissions (continued)**


**Results: Static Mode / 3DH5**

| Frequency (MHz) | Antenna Polarity | Peak Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|---------------------------|----------------------|-------------|----------|
| 2400.0          | Horizontal       | 43.6                      | 60.7*                | 17.1        | Complied |
| 2483.5          | Horizontal       | 52.4                      | 74.0                 | 21.6        | Complied |


| Frequency (MHz) | Antenna Polarity | Average Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|------------------------------|----------------------|-------------|----------|
| 2483.5          | Horizontal       | 40.8                         | 54.0                 | 13.2        | Complied |

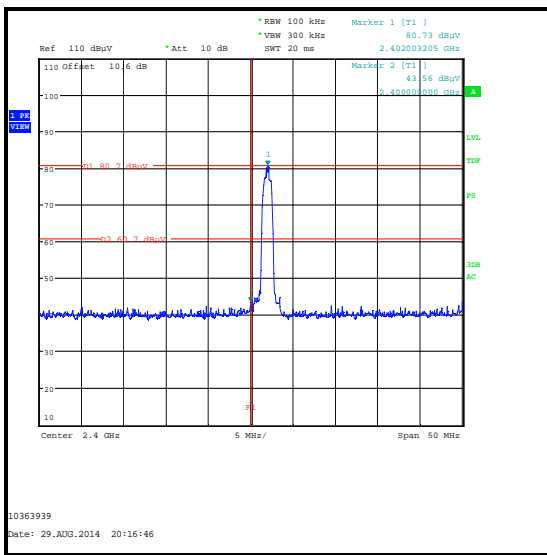

Lower Band Edge Peak Static

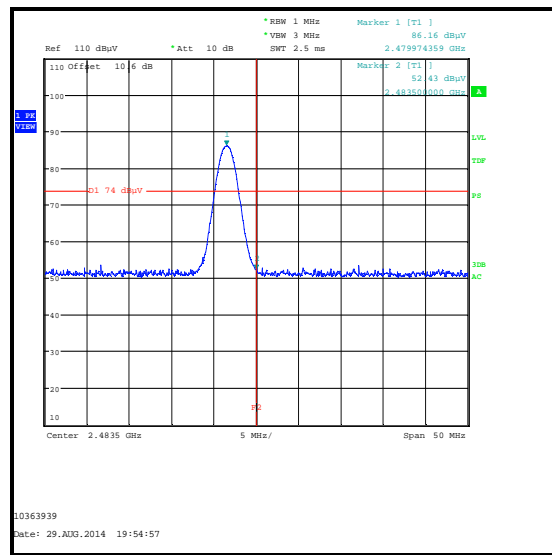

Upper Band Edge Peak Static

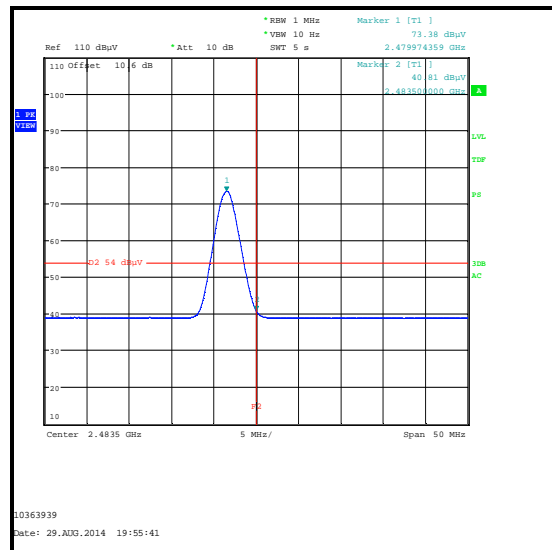


Upper Band Edge Average Static

**Transmitter Band Edge Radiated Emissions (continued)**


**Results: Hopping Mode / 3DH5**

| Frequency (MHz) | Antenna Polarity | Peak Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|---------------------------|----------------------|-------------|----------|
| 2400.0          | Horizontal       | 40.4                      | 61.6*                | 21.2        | Complied |
| 2483.5          | Horizontal       | 51.4                      | 74.0                 | 22.6        | Complied |


| Frequency (MHz) | Antenna Polarity | Average Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|------------------------------|----------------------|-------------|----------|
| 2483.5          | Horizontal       | 38.8                         | 54.0                 | 15.2        | Complied |

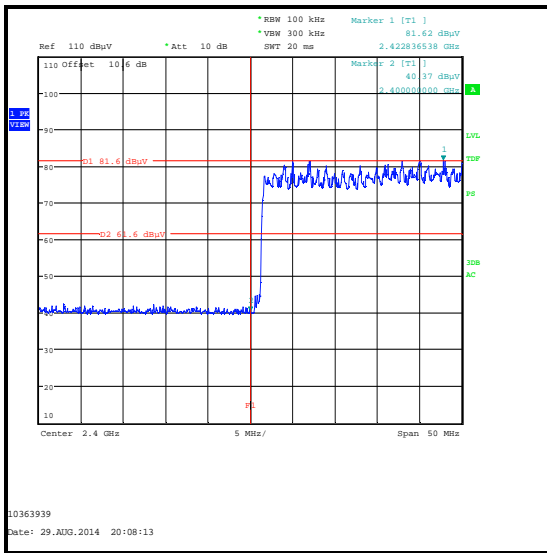

**Lower Band Edge Peak Hopping**

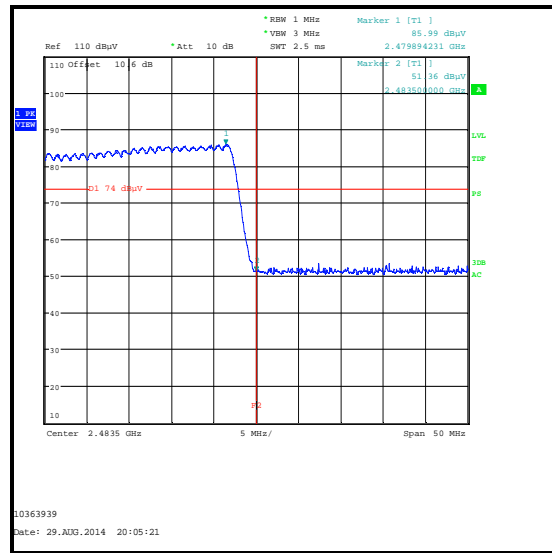

**Upper Band Edge Peak Hopping**

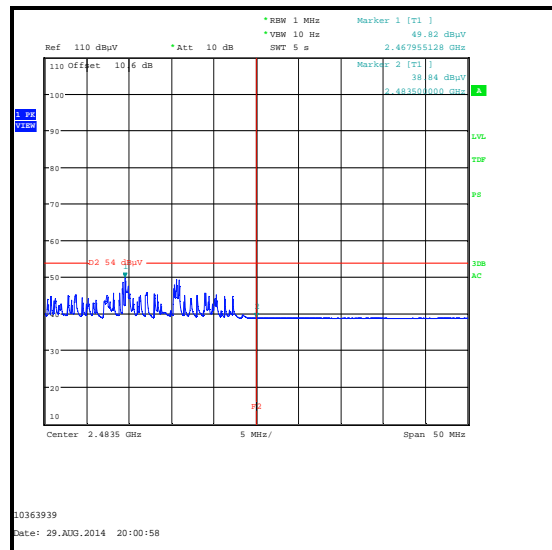

**Upper Band Edge Average Hopping**

**Transmitter Band Edge Radiated Emissions (continued)****Test Equipment Used:**

| <b>Asset No.</b> | <b>Instrument</b> | <b>Manufacturer</b> | <b>Type No.</b> | <b>Serial No.</b> | <b>Date Calibration Due</b> | <b>Cal. Interval (Months)</b> |
|------------------|-------------------|---------------------|-----------------|-------------------|-----------------------------|-------------------------------|
| M1656            | Thermohygrometer  | JM Handelpunkt      | 30.5015.13      | None stated       | 14 Mar 2015                 | 12                            |
| K0002            | 3m RSE Chamber    | Rainford EMC        | N/A             | N/A               | 14 Nov 2014                 | 12                            |
| M1874            | Test Receiver     | Rohde & Schwarz     | ESU26           | 100553            | 13 May 2015                 | 12                            |
| A1534            | Pre Amplifier     | Hewlett Packard     | 8449B           | 3008A00405        | 18 May 2015                 | 12                            |
| A1818            | Antenna           | EMCO                | 3115            | 00075692          | 14 Nov 2014                 | 12                            |
| A1396            | Attenuator        | Huber & Suhner      | 6810.17.B       | 757987            | 02 May 2015                 | 12                            |

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

| <b>Measurement Type</b>             | <b>Range</b>          | <b>Confidence Level (%)</b> | <b>Calculated Uncertainty</b> |
|-------------------------------------|-----------------------|-----------------------------|-------------------------------|
| AC Conducted Spurious Emissions     | 0.15 MHz to 30 MHz    | 95%                         | ±4.69 dB                      |
| Conducted Maximum Peak Output Power | 2.4 GHz to 2.4835 GHz | 95%                         | ±1.13 dB                      |
| Carrier Frequency Separation        | 2.4 GHz to 2.4835 GHz | 95%                         | ±3.92%                        |
| Average Time of Occupancy           | 2.4 GHz to 2.4835 GHz | 95%                         | ±3.53 ns                      |
| 20 dB Bandwidth                     | 2.4 GHz to 2.4835 GHz | 95%                         | ±3.92%                        |
| Radiated Spurious Emissions         | 30 MHz to 1 GHz       | 95%                         | ±5.65 dB                      |
| Radiated Spurious Emissions         | 1 GHz to 25 GHz       | 95%                         | ±2.94 dB                      |

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## **7. Report Revision History**

| Version Number | Revision Details |        |                 |
|----------------|------------------|--------|-----------------|
|                | Page No(s)       | Clause | Details         |
| 1.0            | -                | -      | Initial Version |

---END OF REPORT---