

FCC TEST REPORT

Under
FCC 15 Subpart C, Paragraph 15.247: 2004

Operating in 2400 ~ 2483.5 MHz Band

Prepared For :

Cyber Blue (HK) Limited

Room A, 27/F., Park Avenue Tower, 5 Moreton Terrace Causeway Bay, Hong Kong.

FCC ID: UFDBH02

EUT: Bluetooth Headset

Model: BH02

July 12, 2006

Report Type: Original Report

Test Engineer: Jacky Huang

Test Date: June 16, 2006

Review By: _____

Apollo Liu / Manager

TABLE OF CONTENTS

1. General Information..... 3
 1. 1 Notes 3
 1. 2 Testing Laboratory 3
 1. 3 Details of Applicant 3
 1. 4 Application Details 3
 1. 5 Test Item 3
 1. 6 Test Standards 3
2. Technical Test..... 4
 2. 1 Summary of Test Results 4
 2. 2 Antenna Requirement 4
3. EUT Modifications..... 4
4. Conducted Power Line Test 5
 4. 1 Test Equipment 5
 4. 2 Test Procedure 5
 4. 3 Test Setup 5
 4. 4 Configuration of the EUT 6
 4. 5 EUT Operating Condition 7
 4. 6 Conducted Power Line Emission Limits 7
 4. 7 Conducted Power Line Test Result 8
5. FCC Part 15.247 Requirements for 802.11b/g Systems 10
 5. 1 Test Equipment 10
 5. 2 Test Procedure 10
 5. 3 Test Setup 10
 5. 4 Configuration of the EUT 10
 5. 5 EUT Operating Condition 10
 5. 6 Limit 11
 5. 7 Test Result 11
6. Transmitter Spurious Radiated Emission at 3 Meters..... 20
 6. 1 Test Equipment 20
 6. 2 Test Procedure 20
 6. 3 Test Setup 20
 6. 4 Configuration of the EUT 20
 6. 5 EUT Operating Condition 20
 6. 6 Limit 21
 6. 7 Test Result 22
7. RF Exposure Requirements 23
 7. 1 Test Equipment 23
 7. 2 Limit 23
 7. 3 Test Result 23
8. Photos of Testing 24
 8. 1 EUT Test Photographs 24
 8. 2 EUT Detailed Photographs 25
9. FCC ID Label 28
10. Test Equipment 29

1. General Information

1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

1.2 Testing Laboratory

Ke Mei Ou Laboratory Co., Ltd.

7A, Jiexiangge, JiahuiXincheng, No.3027, Shennan Rd., Futian, Shenzhen, Guangdong, P.R.China.

Tel: +86 755 83642690 Fax: +86 755 83297077

Email: kmo@kmlab.com

Internet: www.kmlab.com

Site on File with the Federal Communications Commission – United States

Registration Number: 125782

For 3 & 10 meter OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC4986

For 3 & 10 meter OATS

Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory.

Bldg of Metrology & Quality Inspection, Longzhu Road, Shenzhen, Guangdong, China.

Site on File with the Federal Communications Commission – United States

Registration Number: 274801

For 3 meter Semi-Anechoic Chamber

1.3 Details of Applicant

Name : Cyber Blue (HK) Limited

Address : Room A, 27/F., Park Avenue Tower, 5 Moreton Terrace Causeway Bay, Hong Kong.

1.4 Application Details

Date of Receipt of Application : June 8, 2006

Date of Receipt of Test Item : June 8, 2006

Date of Test : June 16~July 12, 2006

1.5 Test Item

Manufacturer : See Applicant

Trade Name : Cyber-blue

Model No. : BH02, BH13, BH04, BH05, BH06, BH07, BH08, BH09, BH10, BH11

Description : Bluetooth Headset

Additional Information

Frequency : 2400MHz~2483.5MHz

Maximum Range : Up to 30m

Number of Channels : 79

Transmitter Antenna : Internal

Power Supply : DC3.7V

Modulation Type : Frequency Hopping Spread Spectrum (FHSS)

Power Consumption : N/A

1.6 Test Standards

| |
|--|
| FCC 15 Subpart C, Paragraph 15.247: 2004 |
|--|

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

2. Technical Test

2.1 Summary of Test Results

The EUT has been tested according to the following specifications:

| Standard | Test Type | Result | Notes |
|--|--|--------|-----------|
| FCC Part 15, Paragraph 15.203, 15.247(b)(4)(i) | Antenna Requirement | PASS | Complies |
| FCC Part 15, Paragraph 15.107, 15.207 | Conducted Test | PASS | Complies |
| FCC Part 15, Paragraph 15.247(b)(1) | Peak Output Power | PASS | Complies |
| FCC Part 15, Paragraph 15.247(a) | 20dB Bandwidth | PASS | Complies. |
| FCC Part 15, Paragraph 15.247(c) | 100kHz Bandwidth of Frequency Band Edges | PASS | Complies. |
| FCC Part 15, Paragraph 15.209(a)(f) | Spurious Emission | PASS | Complies |
| FCC Part 15, Paragraph 15.247(a)(1) | Frequency Separation | PASS | Complies |
| FCC Part 15, Paragraph 15.247(a)(1)(iii) | Number of Hopping Frequency | PASS | Complies |
| FCC Part 15, Paragraph 15.247(a)(1)(iii) | Time of Occupancy | PASS | Complies |
| FCC Part 15, Paragraph 15.247(c) | Peak Power Density | PASS | Complies |

* The digital circuit porting of the EUT has been tested and verified to comply with FCC Part 15, Subpart B., Class B Digital Devices and the associated Radio Receiver has also been tested and found to comply with FCC Part 15, Subpart B – Radio Receivers.

2.2 Antenna Requirement

A. Regulation

FCC section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

B. Result

The internal antenna used in this product is a monopole antenna and integrated on PCB and it is considered to meet antenna requirement of FCC.

3. EUT Modifications

No modification by Ke Mei Ou Laboratory Co., Ltd.

4. Conducted Power Line Test

4.1 Test Equipment


Please refer to Section 10 this report.

4.2 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission., the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2003 on conducted measurement. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

4.3 Test Setup

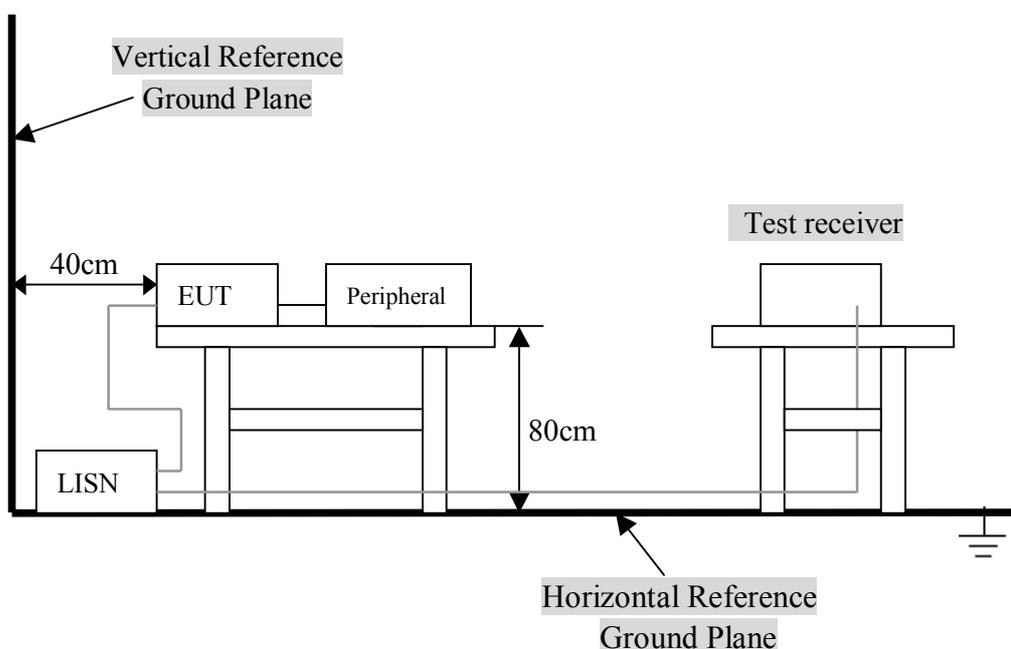

For the actual test configuration, Please refer to the related items – Photos of Testing.

4. 4 Configuration of the EUT

The EUT was configured according to ANSI C63.4-2003. EUT was used Li-Ion battery. The operation frequency is from 2400MHz~2483.5MHz. Enable the signal transmitted from the EUT. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Note:

- 1) Operating Modes: Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. The EUT operates in normal FHSS.
- 2) Special Test Software & Hardware: Special firmware and hardware provided by the Applicant are installed to allow the EUT to operate in FHSS at each channel frequency continuously. For example, the transmitter will be operated at each of lowest, middle and highest frequencies individually continuously during testing.
- 3) Transmitter Test Antenna: The EUT is tested with the antenna fitted in a manner typical of normal intended use as an integral / non-integral antenna equipment as describe with the test results.
- 4) Frequency(ies) Tested: 2402MHz, 2441MHz and 2480MHz were pre-tested, The worst case one, was chosen for conducted emission test.
- 5) Above 1GHz, the 2402MHz, 2441MHz and 2480MHz were tested individually.
- 6) Normal Test Modulation: FHSS
- 7) Modulating Signal Source: Internal

* Associated Antenna Descriptions: The antenna used in this product is embedded antenna.

A. EUT

| Device | Manufacturer | Model # | FCC ID |
|-------------------|-------------------|---------|---------|
| Bluetooth Headset | EDS LAB PTE. LTD. | BH02 | UFDBH02 |

B. Internal Devices

| Device | Manufacturer | Model # | FCC ID |
|--------|--------------|---------|--------|
| N/A | | | |
| | | | |
| | | | |
| | | | |
| | | | |


C. Peripherals

| Device | Manufacturer | Model # Serial # | FCC ID/ DoC | Cable |
|----------|--------------|---------------------|----------------|---|
| Printer | HP | HP930C | DoC | 1.5m unshielded power cord 1.2m unshielded data cable. |
| Modem | GVC | N/A | DoC | 1.5m unshielded power cord 1.2m unshielded data cable. |
| Notebook | DELL | PP10L | DoC | 1.5m unshielded power cord |
| PC | Dell | 2400n | DoC | 1.5m unshielded power cord |

4. 5 EUT Operating Condition

Operating condition is according to ANSI C63.4 - 2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

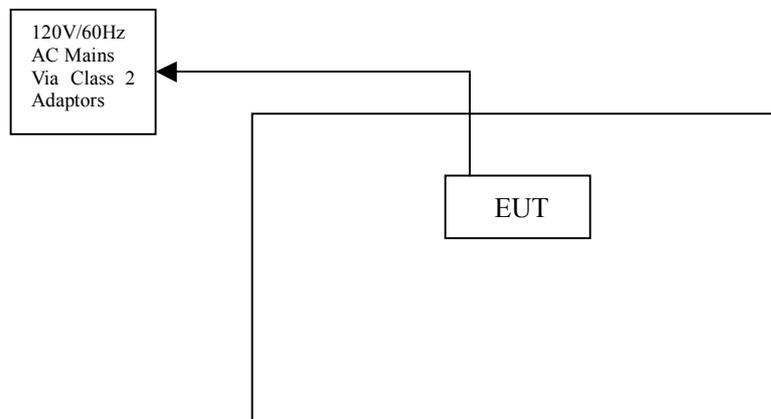

4. 6 Conducted Power Line Emission Limits

| FCC Part 15 Paragraph 15.207 (dBuV) | | |
|-------------------------------------|---------------|---------------|
| Frequency Range (MHz) | Class A QP/AV | Class B QP/AV |
| 0.15 – 0.5 | 79/66 | 66-56/56-46 |
| 0.5 – 5.0 | 73/60 | 56/46 |
| 5.0 - 30 | 73/60 | 60/50 |

NOTE : In the above table, the tighter limit applies at the band edges.

4. 7 Conducted Power Line Test Result

| | | | |
|--------------|-----------------------------------|-------------|---------|
| Product | : Bluetooth Headset | Test Mode | : FHSS |
| Test Item | : Conducted Emission Data | Temperature | : 25 °C |
| Test Voltage | : DC5V (Power by DC Power Supply) | Humidity | : 56%RH |
| Test Result | : PASS | | |

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz.

- Temperature : 26 °C
- Humidity : 53 % RH

| FCC Part 15 Paragraph 15.207 | | | | | | | |
|------------------------------|-----------------|-------|--------------|--------------|-------|-------------|--------|
| Frequency (MHz) | Emission (dBuV) | | LINE/NEUTRAL | Limit (dBuV) | | Margin (dB) | |
| | QP | AV | | QP | AV | QP | AV |
| 0.190 | 54.87 | 43.26 | LINE | 64.04 | 54.04 | -9.17 | -10.78 |
| 0.190 | 55.28 | 45.98 | NEUTRAL | 64.04 | 54.04 | -8.76 | -8.06 |
| 0.242 | 49.97 | 43.06 | LINE | 62.03 | 52.03 | -12.06 | -8.97 |
| 0.234 | 49.36 | 41.38 | NEUTRAL | 62.31 | 52.31 | -12.95 | -10.93 |
| 3.762 | 32.71 | 22.54 | LINE | 56.00 | 46.00 | -23.29 | -23.46 |
| 4.374 | 37.28 | 23.41 | NEUTRAL | 56.00 | 46.00 | -18.72 | -22.59 |

Note: NF = No Significant Peak was Found.


Note:

- 1.Uncertainty in conducted emission measured is <+/- 2dB.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.All Reading Levels are Quasi-Peak and Average value.
- 4.Emission = Meter Reading + Factor; Factor = Insertion Loss + Cable Loss.
- 5.Margin Value = Emission Level - Limit Value.

Conducted Emission

EN55022

EUT: Bluetooth Headset
Manufacturer: Cyber Blue (HK) Limited.
Operating Condition: Transmitter
Test Site: Ke Mei Ou Laboratory
Operator: Jacky Huang
Test Specification: LINE&NEUTRAL
Comment:

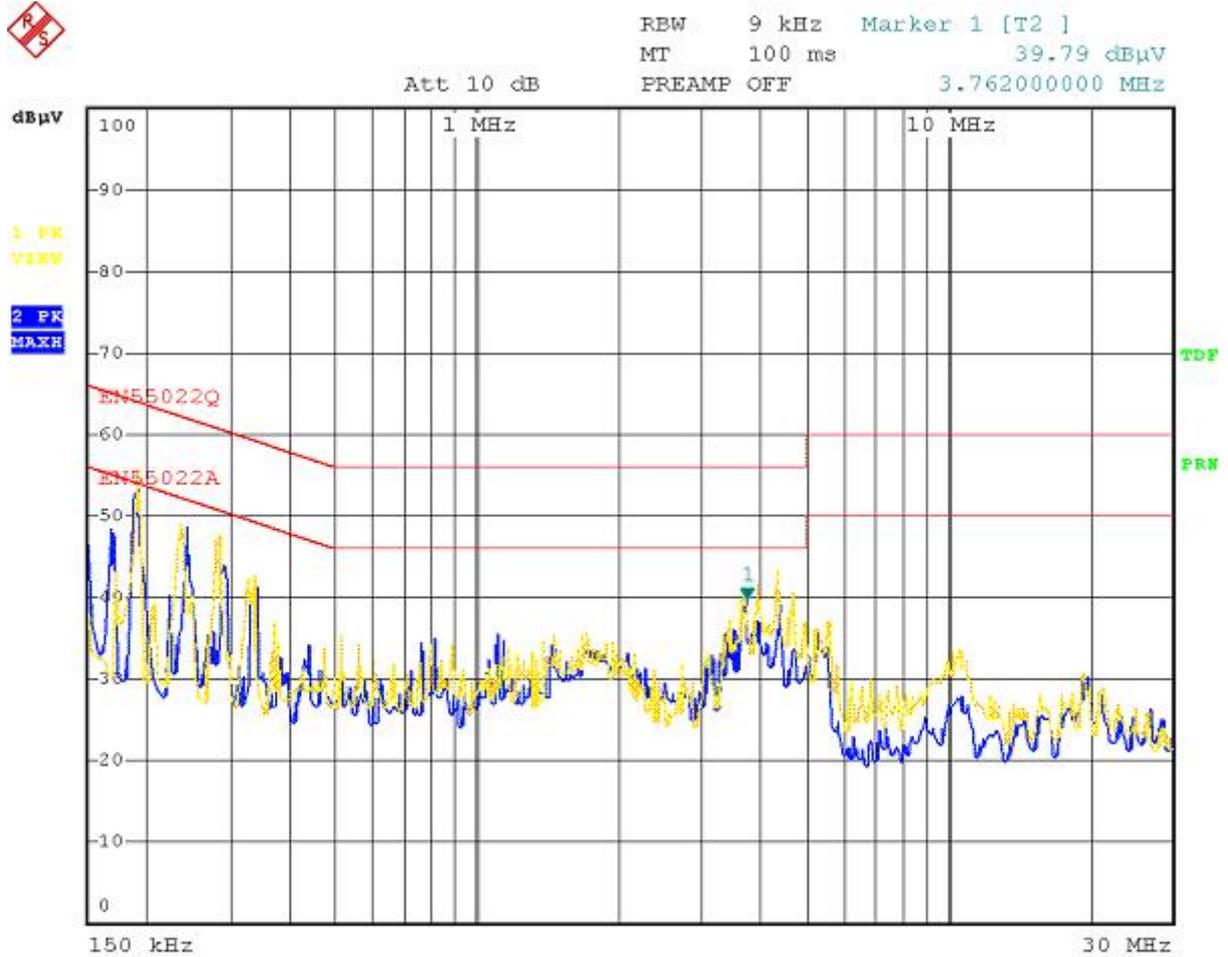

5. FCC Part 15.247 Requirements for FHSS Systems

5.1 Test Equipment

Please refer to Section 10 this report.

5.2 Test Procedure

Refer to FCC 15.247(a)(2), ANSI C63.4: 2003

20 dB Bandwidth:

- Place the EUT on the table and set it in the transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW = 30 kHz, VBW = 100 kHz, Span = 2 MHz, Sweep = 100ms.
- Mark the peak frequency and -20dB (upper and lower) frequency.
- Repeat until all the rest channels are investigated.

Peak Power:

The transmitter output is connected to the test receiver. The test receiver is set to the peak power detection. The power is equal to the reading level on test receiver plus cable loss at the EUT RF output terminal.

100kHz Bandwidth of Band Edges Measurement:

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.
- The band edges was measured and recorded.

Peak Power Spectral Density:

- The transmitter output is connected to a test receiver, The spectrum analyzer's resolution bandwidth was set at 3kHz RBW and 30kHz VBW as that of the fundamental frequency. Set the sweep time=100s.
- The power spectral density was measured and recorded.
- The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

Frequency Separation:

- Place the EUT on the table and set it in the transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW = 100 kHz, VBW = 100 kHz, Span = 2 MHz, Sweep = 100ms.
- Set center frequency spectrum analyzer = middle of hopping channel.


Number of Hopping Frequency:

- Place the EUT on the table and set it in the transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set spectrum analyzer Start=2400MHz, Stop=2483.5MHz, RBW = 100 kHz, VBW = 300 kHz, Sweep=100ms
- Max hold, view and count how many channel in the band.

Time of Occupancy (Dwell Time):

- Place the EUT on the table and set it in the transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set center frequency of spectrum analyzer = operating frequency, RBW = 100 kHz, VBW = 300 kHz, Sweep=2ms
- Repeat above procedures until all frequency measured were complete.

5.3 Test Setup



5.4 Configuration of the EUT

Same as section 4.4 of this report

5.5 EUT Operating Condition

Same as section 4.5 of this report.

5. 6 Limit

20 dB Bandwidth: For frequency hopping systems operating in the 2400MHz~2483.5MHz no limit for 20dB bandwidth
Peak Power: For frequency hopping systems operating in the 2400~2483.5MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725~5850MHz band: 1Watt. For all other frequency hopping systems in the 2400~2483.5MHz band: 0.125Watts.

100kHz Bandwidth of Band Edges Measurement: According to §15.247(c), in any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.3209(a).

Peak Power Spectral Density: According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission

Frequency Separation: According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Number of Hopping Frequency: According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400~2483.5MHz bands shall use at least 15 hopping frequencies.


Time of Occupancy (Dwell Time): According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400~2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

5. 7 Test Result


A. 20 dB Bandwidth

| | | | |
|--------------|-----------------------------|-------------|---------------------------|
| Product | : Bluetooth Headset | Test Mode | : CH Low, CH Mid, CH High |
| Test Item | : 20 dB BW | Temperature | : 25 °C |
| Test Voltage | : DC3.7V (Power by Battery) | Humidity | : 56%RH |
| Test Result | : PASS | | |


| Channel | Channel Frequency | 20 dB Down BW (kHz) |
|---------|-------------------|---------------------|
| Low | 2402 | 816 |
| Mid | 2441 | 820 |
| High | 2480 | 856 |

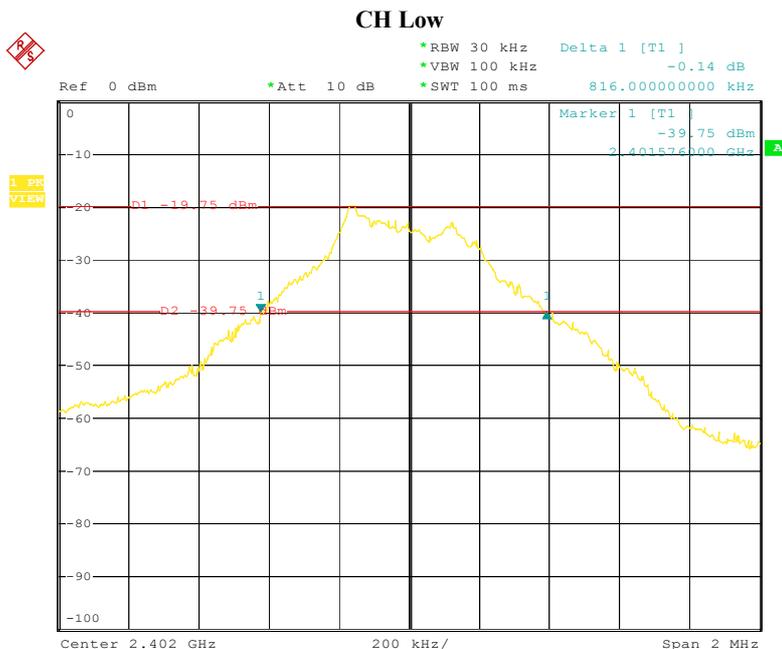

Date: 12.JUL.2006 02:19:00

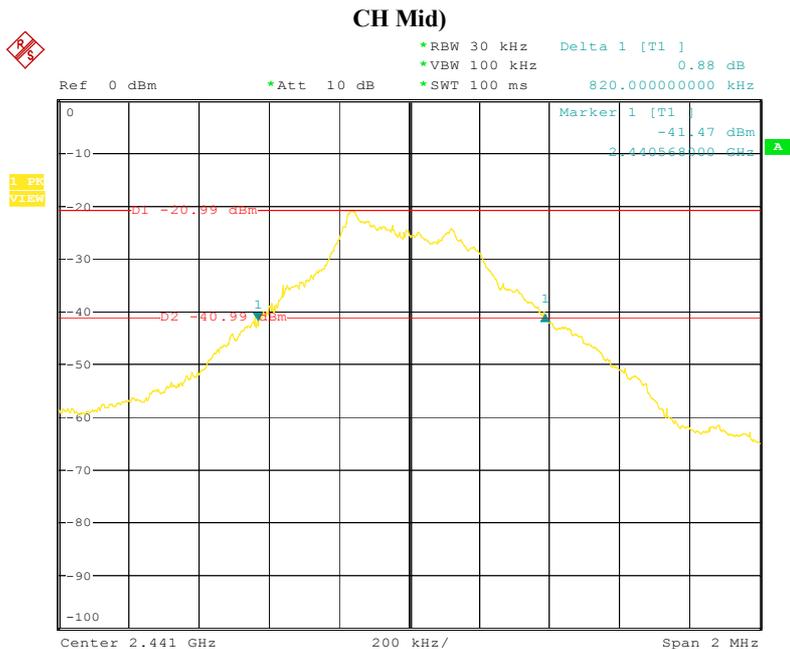

Date: 12.JUL.2006 02:22:43

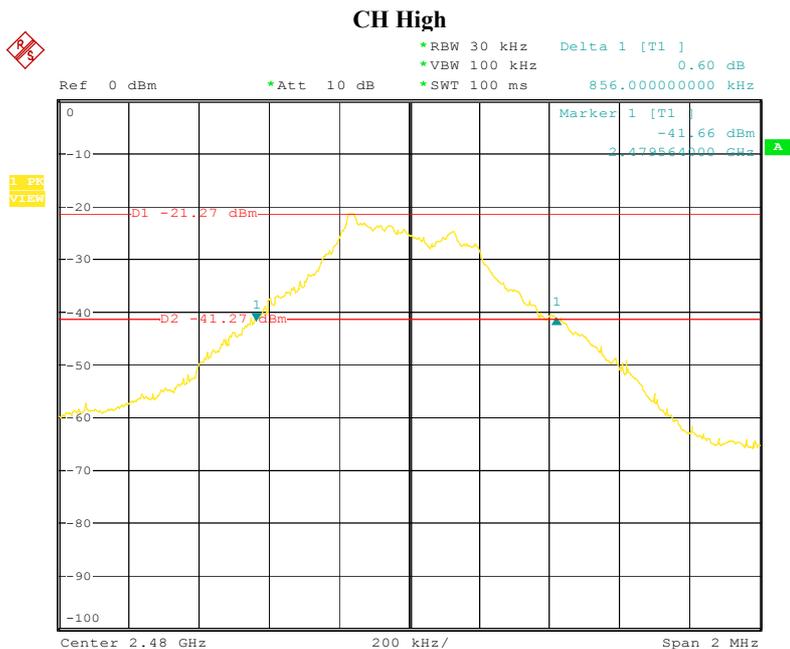

Date: 12.JUL.2006 02:31:52

B. Peak Power

| | | | |
|--------------|-----------------------------|-------------|---------------------------|
| Product | : Bluetooth Headset | Test Mode | : CH Low, CH Mid, CH High |
| Test Item | : Peak Power | Temperature | : 25 °C |
| Test Voltage | : DC3.7V (Power by Battery) | Humidity | : 56%RH |
| Test Result | : PASS | | |

| Channel | Frequency (MHz) | Output Power (dBm) | FCC Limit (W/dBm) | Result |
|---------|-----------------|--------------------|-------------------|-------------|
| Low | 2402 | -0.10 | 1.00/30.00 | PASS |
| Mid | 2441 | -0.06 | | PASS |
| High | 2480 | -0.64 | | PASS |


C. 100kHz Band Edges Measurement

| | | | |
|--------------|-----------------------------|-------------|-------------------|
| Product | : Bluetooth Headset | Test Mode | : CH Low, CH High |
| Test Item | : Band Edges Measurement | Temperature | : 25 °C |
| Test Voltage | : DC3.7V (Power by Battery) | Humidity | : 56%RH |
| Test Result | : PASS | | |


| Channel | Detector | Radiated Method Max. Field Strength of Fundamental (dBuV/m) | Conducted Method Between Carrier Max. Power and Local Max. Emission in Restrict Band(dBc) | The Max. Field Strength in Restrict Band (dBuV/m) | Limt @3m (dBuVm) Peak / Average | Margin (dB) |
|---------|----------|---|---|---|---------------------------------|-------------|
| Low | Peak | 94.60 | 46.23 | 48.37 | 74.0 / 54.0 | -25.63 |
| High | Peak | 93.80 | 47.45 | 46.35 | 74.0 / 54.0 | -27.65 |

Note: (1) According to step 2 of Marker-Delta Method DA 00-705 (following plots included).
 (2) According to step 3 of Marker-Delta Method:
 The Max. Field Strength in Restrict Band = Filed Strength of Fundamental – Between Carrier Max Power and Local Max. Emission in Restrict Band
 (3) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Channel: Low

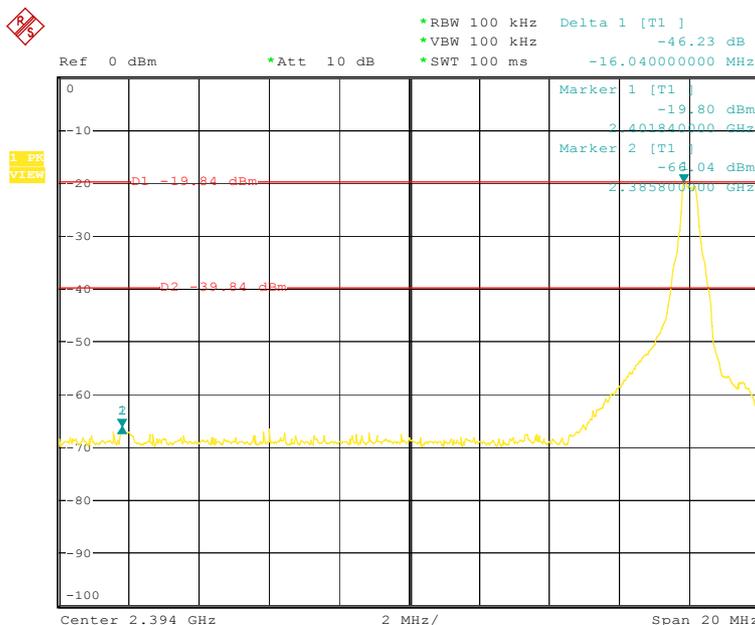

Date: 12.JUL.2006 03:07:42

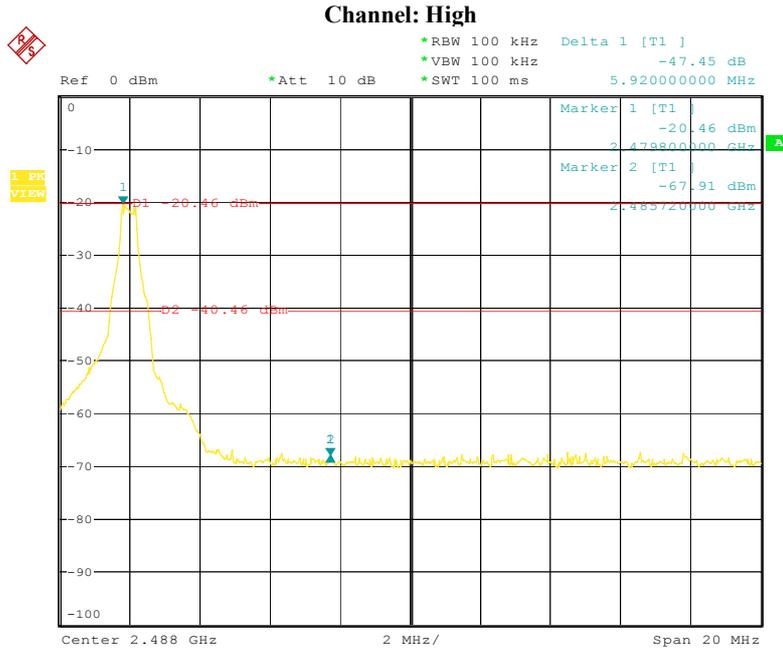


Date: 12.JUL.2006 03:18:16


D. Peak Power Spectral Density

| | | | |
|--------------|-------------------------------|-------------|-------------------|
| Product | : Bluetooth Headset | Test Mode | : CH Low, CH High |
| Test Item | : Peak Power Spectral Density | Temperature | : 25 °C |
| Test Voltage | : DC3.7V (Power by Battery) | Humidity | : 56%RH |
| Test Result | : PASS | | |


| Channel | Frequency (MHz) | PPSD (dBm) | FCC Limit (dBm) | Result |
|---------|-----------------|------------|-----------------|--------|
| Low | 2402 | -30.42 | 8.00 | PASS |
| Mid | 2441 | -26.46 | | PASS |
| High | 2480 | -28.81 | | PASS |

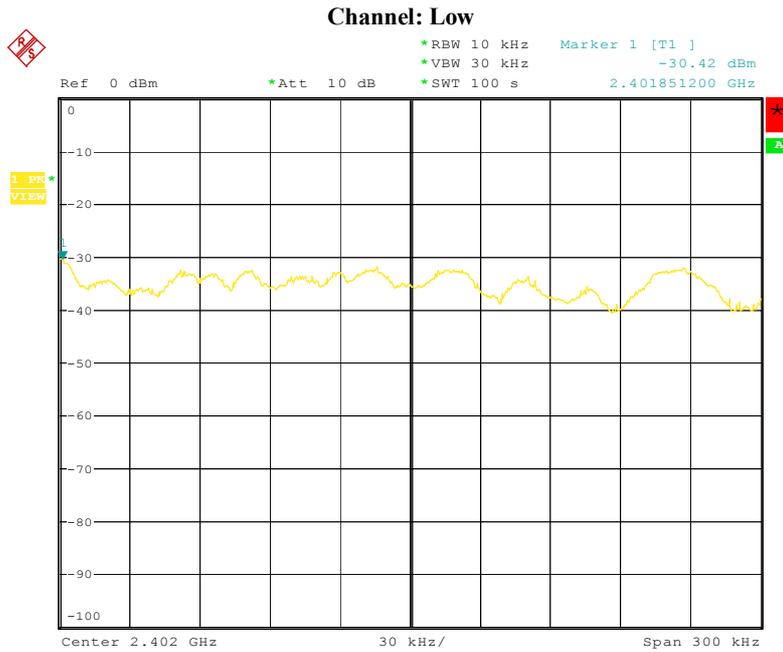

Date: 12.JUL.2006 04:22:45

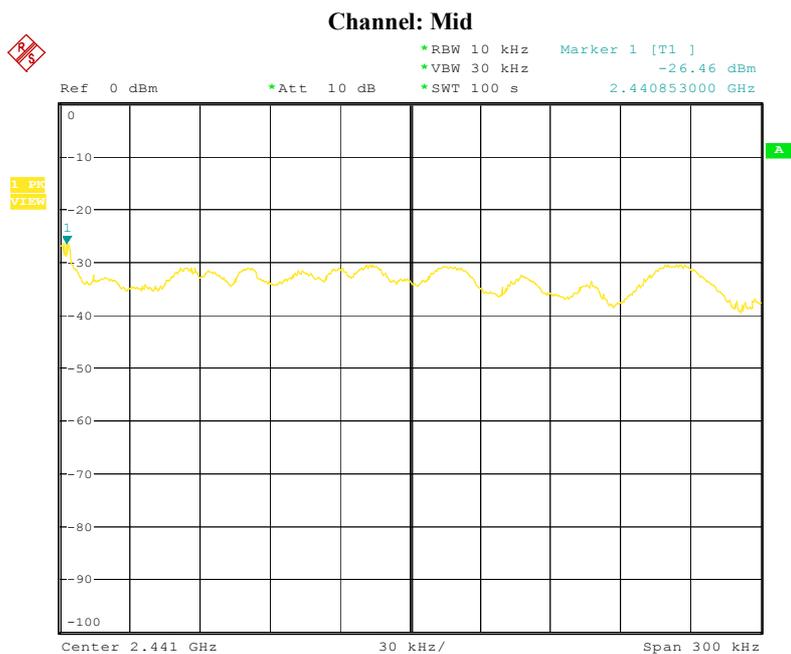

Date: 12.JUL.2006 04:28:44

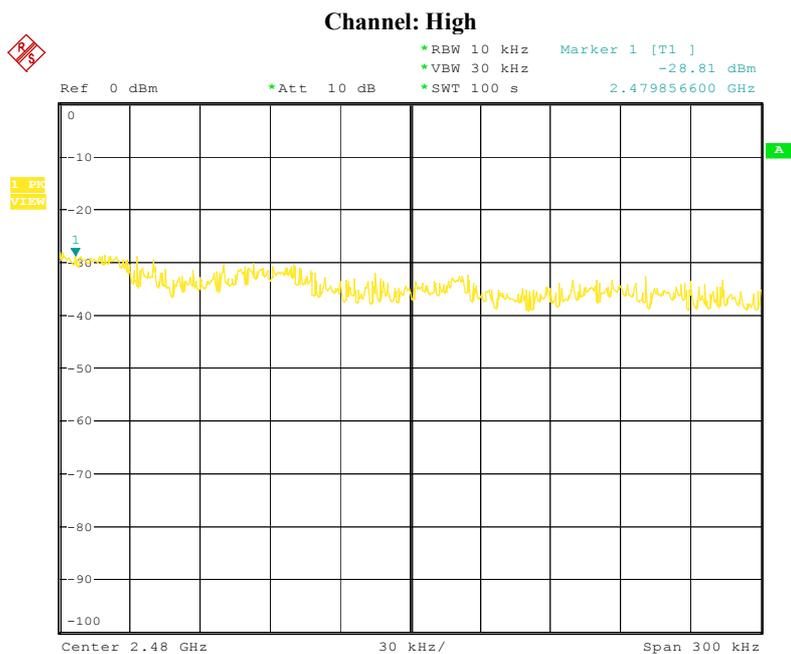


Date: 12.JUL.2006 04:40:31


E. Frequency Separation

| | | | |
|--------------|-----------------------------|-------------|---------------------------|
| Product | : Bluetooth Headset | Test Mode | : CH Low, CH Mid, CH High |
| Test Item | : Frequency Separation | Temperature | : 25 °C |
| Test Voltage | : DC3.7V (Power by Battery) | Humidity | : 56%RH |
| Test Result | : PASS | | |

| Channel | Channel Frequency (MHz) | Separation Read Value (kHz) | Separation Limit (kHz) |
|---------|-------------------------|-----------------------------|------------------------|
| Low | 2402 | 1000 | >25kHz |
| Mid | 2441 | 1000 | >25kHz |
| High | 2480 | 1000 | >25kHz |

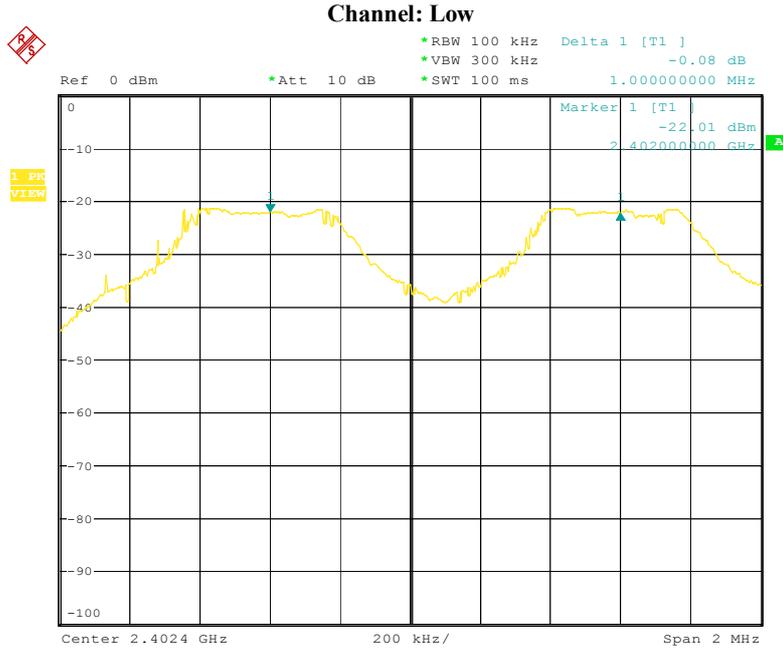


Date: 11.JUL.2006 23:20:44

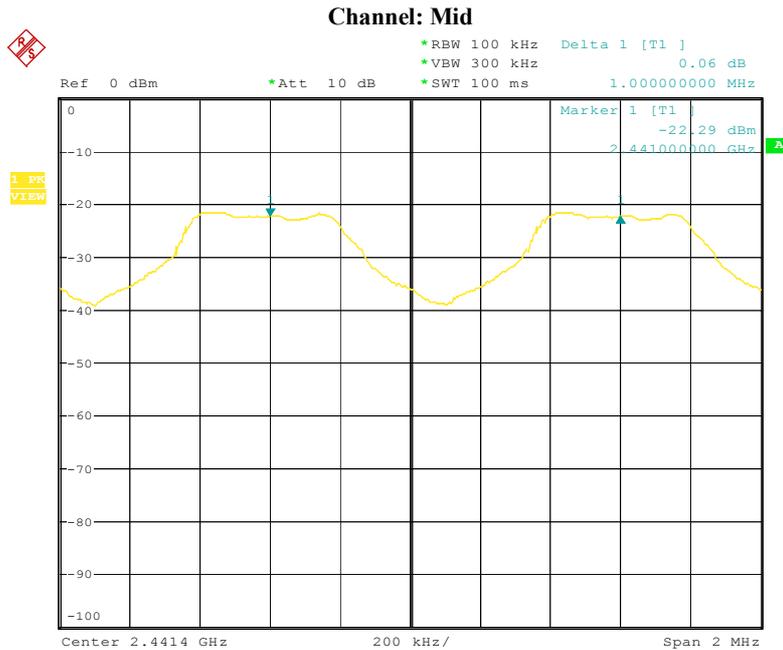

Date: 11.JUL.2006 23:47:26

Channel: High

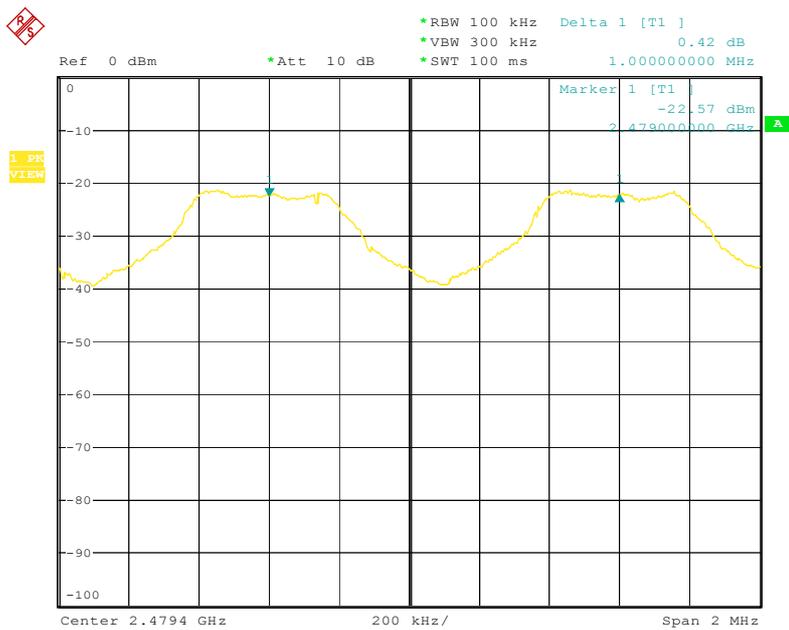


Date: 12.JUL.2006 00:02:38

F. Number of Hopping Frequency


| | | | |
|--------------|-------------------------------|-------------|-------------------|
| Product | : Bluetooth Headset | Test Mode | : CH Low, CH High |
| Test Item | : Number of Hopping Frequency | Temperature | : 25 °C |
| Test Voltage | : DC3.7V (Power by Battery) | Humidity | : 56%RH |
| Test Result | : PASS | | |

| Hopping Channel Frequency Ranganer | Quantity Hopping Channel Read Value | Quantity of Hopping Channel Limit |
|------------------------------------|-------------------------------------|-----------------------------------|
| 2402~2480 | 79 | 75 |

Channel: Low

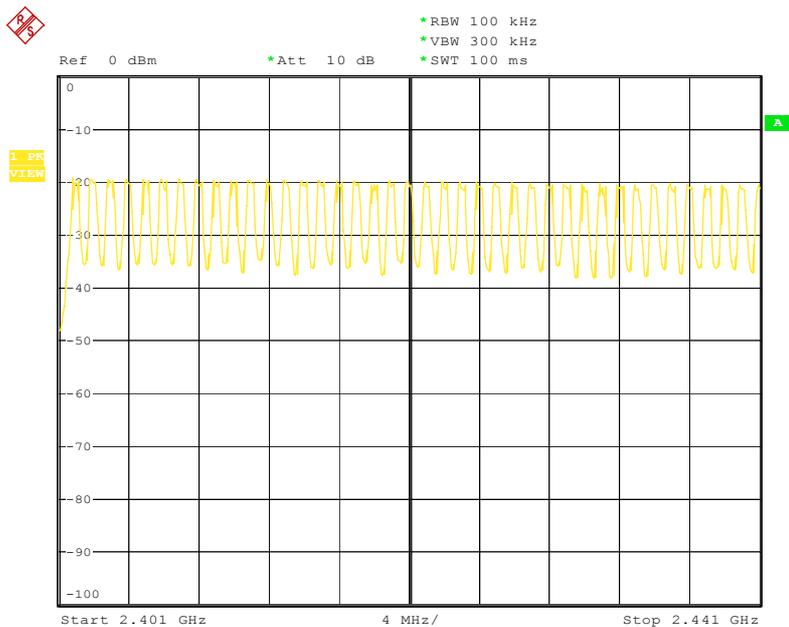


Date: 12.JUL.2006 03:29:12

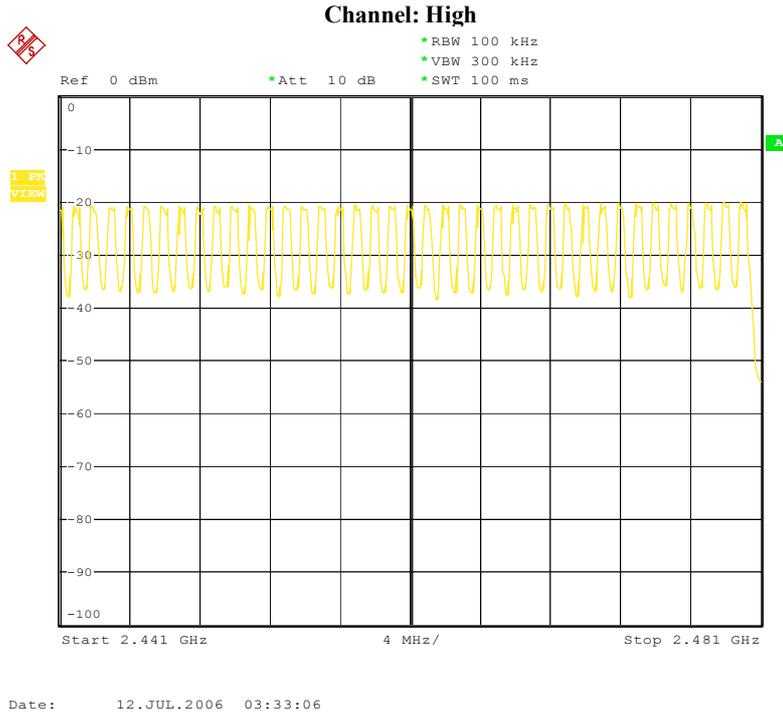


G. Time of Occupancy (Dwell Time)

| | | | |
|--------------|-----------------------------|-------------|------------------|
| Product | : Bluetooth Headset | Test Mode | : CH Low~CH High |
| Test Item | : Time of Occupancy | Temperature | : 25 °C |
| Test Voltage | : DC3.7V (Power by Battery) | Humidity | : 56%RH |
| Test Result | : PASS | | |

| Channel | Channel Frequency(MHz) | Average time of occupancy Read Value(ms) | Average time of occupancy Limit(ms) |
|---------|------------------------|--|-------------------------------------|
| Low | 2402 | 1.260 | 400 |
| Mid | 2441 | 1.252 | 400 |
| High | 2480 | 1.260 | 400 |

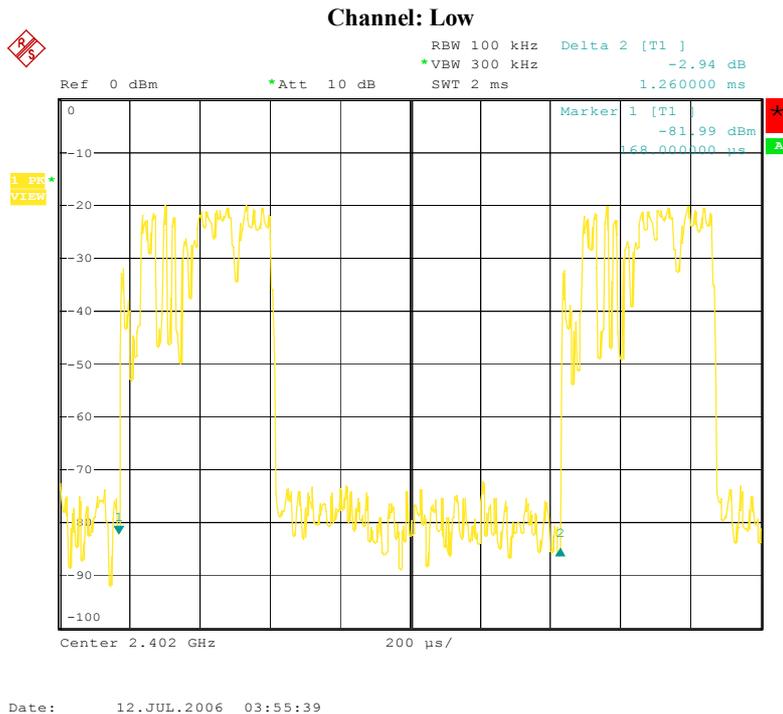


Channel: Mid

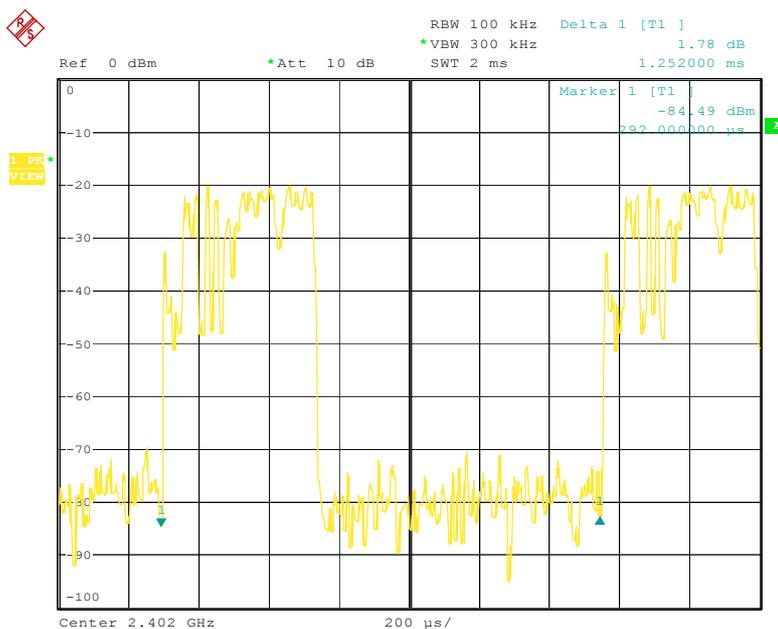

Date: 12.JUL.2006 04:02:51

Channel: High

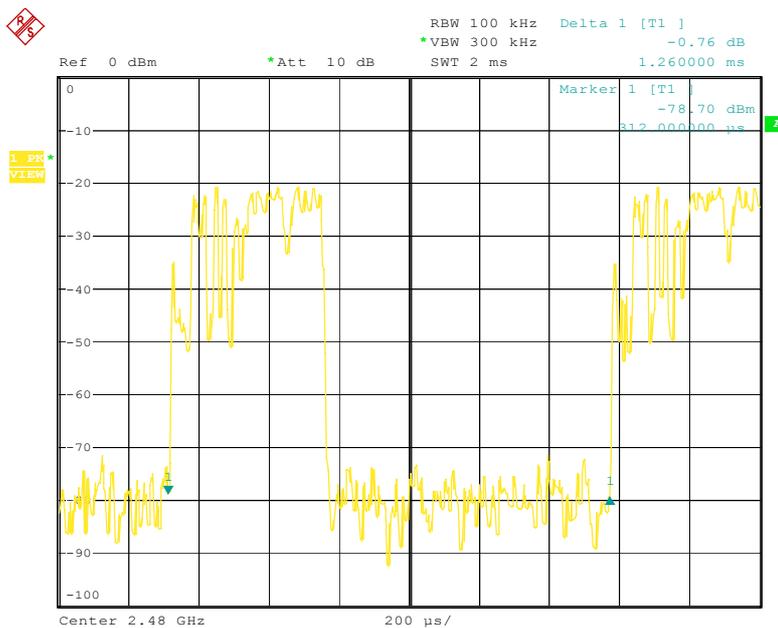

Date: 12.JUL.2006 04:04:53

6. Transmitter Spurious Radiated Emission at 3 Meters


6.1 Test Equipment

Please refer to Section 10 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4 - 2003. The radiated test was performed at Ke Mei Ou Laboratory. This site is on file with the FCC laboratory division, Registration No. 125782.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
3. The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz , peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
4. The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
6. The antenna polarization: Vertical polarization and Horizontal polarization.

6.3 Test Setup

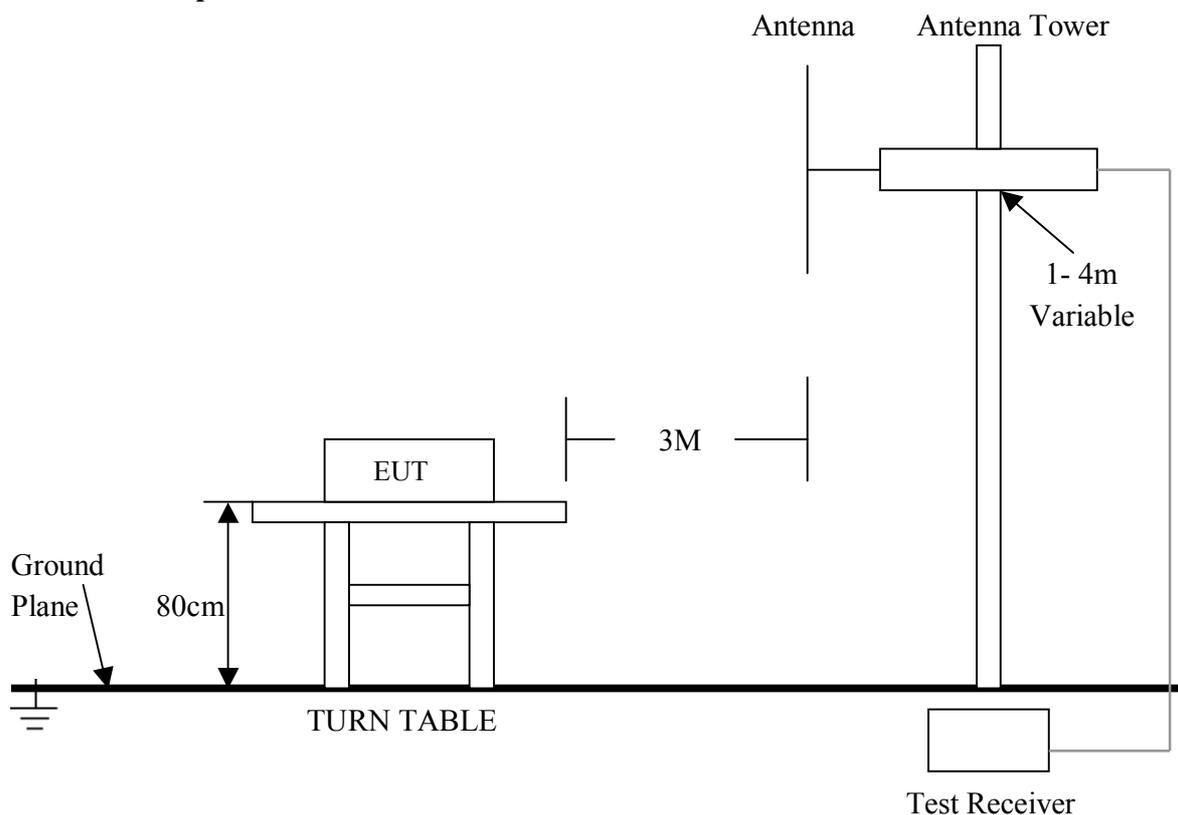

For the actual test configuration , please refer to the related items – Photos of Testing

6.4 Configuration of the EUT

Same as section 4.4 of this report

6.5 EUT Operating Condition

Same as section 4.5 of this report.

6.6 Limit

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in section 15.209(a), which lesser attenuation.

All other emissions inside restricted bands specified in section 15.205(a) shall not exceed the general radiated emission limits specified in section 15.209(a)

Note:

Applies to harmonics/spurious emissions that fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

47 CFR § 15.237(c): The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

FCC CFR 47, Part 15, Subpart C, Para. 15.205(a) – Restricted Frequency Bands

| MHz | MHz | MHz | GHz |
|-------------------------|---------------------|---------------|------------------|
| 0.090–0.110 | 16.42–16.423 | 399.9–410 | 4.5–5.15 |
| 10.495–0.505 | 16.69475–16.69525 | 608–614 | 5.35–5.46 |
| 2.1735–2.1905 | 16.80425–16.80475 | 960–1240 | 7.25–7.75 |
| 4.125–4.128 | 25.5–25.67 | 1300–1427 | 8.025–8.5 |
| 4.17725–4.17775 | 37.5–38.25 | 1435–1626.5 | 9.0–9.2 |
| 4.20725–4.20775 | 73–74.6 | 1645.5–1646.5 | 9.3–9.5 |
| 6.215–6.218 | 74.8–75.2 | 1660–1710 | 10.6–12.7 |
| 6.26775–6.26825 | 108–121.94 | 1718.8–1722.2 | 13.25–13.4 |
| 6.31175–6.31225 | 123–138 | 2200–2300 | 14.47–14.5 |
| 8.291–8.294 | 149.9–150.05 | 2310–2390 | 15.35–16.2 |
| 8.362–8.366 | 156.52475–156.52525 | 2483.5–2500 | 17.7–21.4 |
| 8.37625–8.38675 | 156.7–156.9 | 2655–2900 | 22.01–23.12 |
| 8.41425–8.41475 | 162.0125–167.17 | 3260–3267 | 23.6–24.0 |
| 12.29–12.293 | 167.72–173.2 | 3332–3339 | 31.2–31.8 |
| 12.51975–12.52025 | 240–285 | 3345.8–3358 | 36.43–36.5 |
| 12.57675–12.57725 | 322–335.4 | 3600–4400 | (²) |
| 13.36–13.41. | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

² Above 38.6

FCC 47 CFR, Part 15.209(a) – Field Strength Limits within Restricted Frequency Bands

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009–0.490 | 2400/F(kHz) | 300 |
| 0.490–1.705 | 24000/F(kHz) | 30 |
| 1.705–30.0 | 30 | 30 |
| 30–88 | 100** | 3 |
| 88–216 | 150** | 3 |
| 216–960 | 200** | 3 |
| Above 960 | 500 | 3 |

7. RF Exposure Requirements

7.1 Test Equipment

Please refer to Section 10 this report.

7.2 Limit

According to FCC 15.247(i), Systems operating under provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commissions guidelines.

FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)(1) of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3–3.0 | 614 | 1.63 | * (100) | 6 |
| 3.0–30 | 1842/f | 4.89/f | * (900/f ²) | 6 |
| 30–300 | 61.4 | 0.163 | 1.0 | 6 |
| 300–1500 | | | f/300 | 6 |
| 1500–100,000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3–1.34 | 614 | 1.63 | * (100) | 30 |
| 1.34–30 | 824/f | 2.19/f | * (180/f ²) | 30 |
| 30–300 | 27.5 | 0.073 | 0.2 | 30 |
| 300–1500 | | | f/1500 | 30 |
| 1500–100,000 | | | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

7.3 Test Result

| | | | |
|--------------|-----------------------------|-------------|---------------------------|
| Product | : Bluetooth Headset | Test Mode | : CH Low, CH Mid, CH High |
| Test Item | : RF Exposure | Temperature | : 25 °C |
| Test Voltage | : DC3.7V (Power by Battery) | Humidity | : 56%RH |
| Test Result | : PASS | | |

| Evaluation of RF Exposure Compliance Requirements | |
|--|--|
| MPE Prediction of MPE according to equation from page 19 of OET Bulletin 65, Edition 97-01 | |
| RF Exposure Requirements | Compliance with FCC Rules |
| S=PG/4TIR ² Where: S=Power density P=Power input to antenna G=Power gain of the antenna relative to an isotropic radiator R=Distance to the center of radiation of the antenna | Maximum output power at antenna input terminal: -0.06 dBm = 0.986 mW Prediction distance: < 20 cm Antenna gain : 1 dBi Prediction frequency: 2441MHz MPE limit for uncontrolled exposure at prediction frequency: 1.0 mW/cm ² Remark: No non-compliance noted. (SAR evaluation is not required for the PORTABLE device while its maximum output power is low than the general population low threshold: $60/f_{(GHz)} = 60/2.441=24.58mW$) |


8. Photos of Testing

8.1 EUT Test Photographs

Conducted emission test view



Radiated emission test view

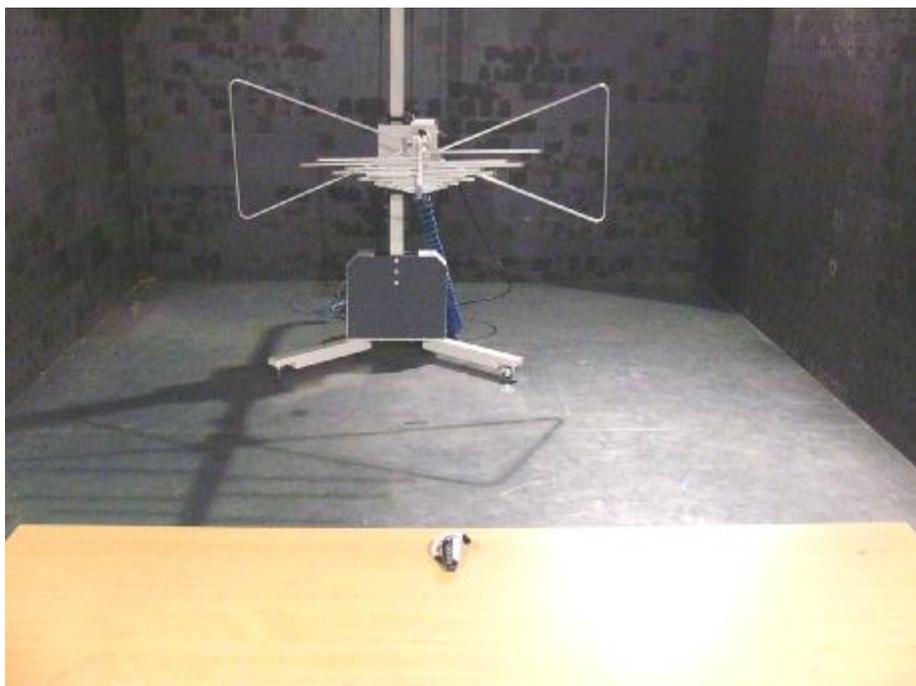

8. 2 EUT Detailed Photographs


EUT top view




EUT bottom view




EUT inside whole view

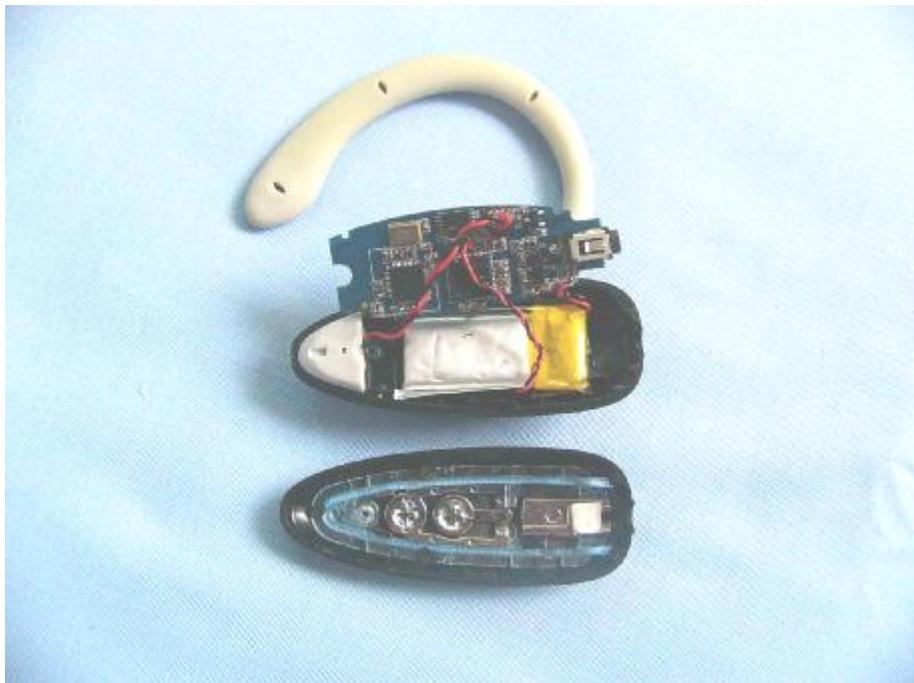

Main & RF board component side

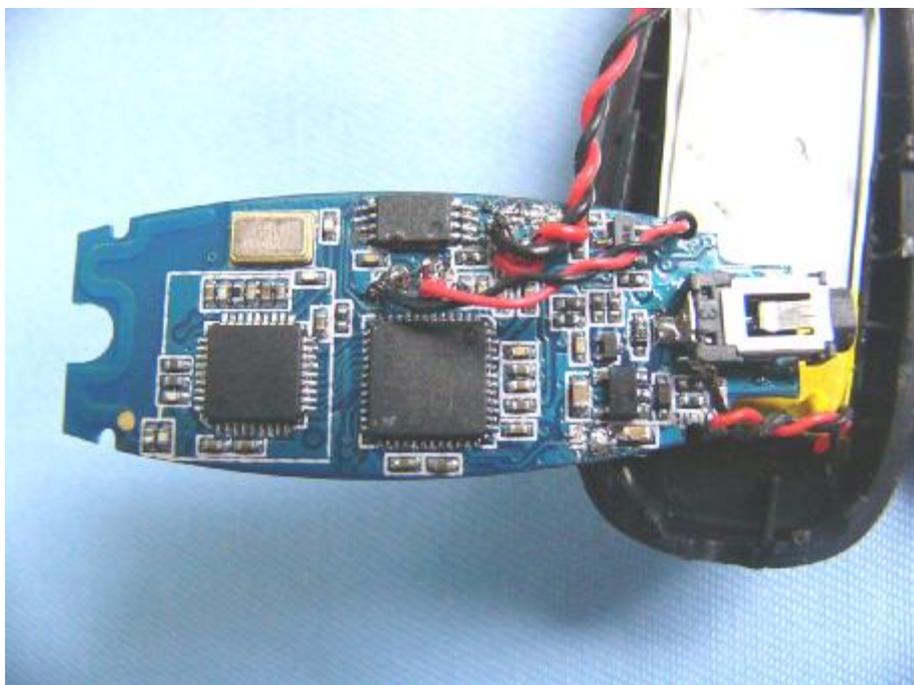

Main & RF board solder side

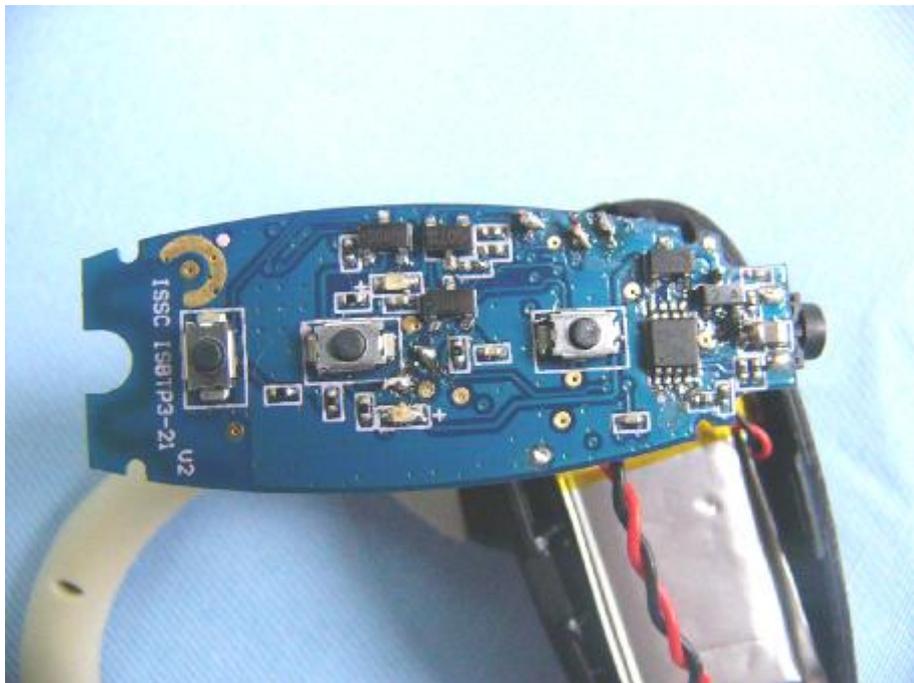

9. FCC ID Label

FCC ID: UFDBH02

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

EUT Bottom View/Proposed FCC ID Label Location



10. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

| Equipment/ Facilities | Manufacturer | Model # | Serial No. | Date of Cal. | Due Date |
|------------------------------------|--------------------|------------|------------|---------------|---------------|
| Turntable | KMO | KSZ001T | 200306 | NCR | NCR |
| Antenna Tower | KMO | KSZ002AT | 200307 | NCR | NCR |
| OATS | KMO | KSZSITE001 | N/A | July 06, 2005 | July 06, 2006 |
| EMI Test Receiver | Rohde & Schwarz | ESPI3 | 100180 | Oct.18, 2005 | Oct.18, 2006 |
| Signal Generator | Rohde & Schwarz | SMT03 | 100059 | Feb.10, 2006 | Feb.10, 2007 |
| Signal Generator | FLUKE | PM5418+Y/C | LO747012 | Feb.10, 2006 | Feb.10, 2007 |
| Signal Generator | FLUKE | PM5418TX | LO738007 | Feb.10, 2006 | Feb.10, 2007 |
| Loop Antenna | SCHWARZBECK | FMZB1516 | 113 | Jan. 30, 2006 | Jan. 30, 2007 |
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 872096/16 | Jan. 30, 2006 | Jan. 30, 2007 |
| Bilog Antenna | Chase | CBL6111C | 2576 | Feb.01, 2006 | Feb.01, 2007 |
| Ultra Broadband Antenna | Rohde & Schwarz | HL 562 | 100110 | June.05, 2006 | June.05, 2007 |
| AMN | Rohde & Schwarz | ESH3-Z5 | 100196 | Oct. 23,2005 | Oct. 23, 2006 |
| AMN | Rohde & Schwarz | ESH3-Z5 | 100197 | Oct. 23,2005 | Oct. 23, 2006 |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | N/A | N/A | N/A |
| Absorbing Clamp | Rohde & Schwarz | MDS-21 | N/A | Oct. 29,2005 | Oct. 29,2006 |
| KMO Shielded Room | KMO | KMO-001 | N/A | N/A | N/A |
| EMI Test Receiver | Rohde & Schwarz | ESCS30 | 100003 | Feb. 27, 2006 | Feb.27, 2007 |
| AMN | Rohde & Schwarz | ESH3-Z5 | 100002 | Feb.10, 2006 | Feb.10, 2007 |
| LISN | Kyoritsu | KNW-407 | 8-1441-8 | Feb.10, 2006 | Feb.10, 2007 |
| EMI Test Receiver | Rohde & Schwarz | ESI26 | 838786/013 | Feb.10, 2006 | Feb.10, 2007 |
| Bilog Antenna | Chase | CBL6112B | 2591 | Feb.10, 2006 | Feb.10, 2007 |
| Horn Antenna | Rohde & Schwarz | HF906 | 100014 | Feb.10, 2006 | Feb.10, 2007 |
| Power Meter | Rohde & Schwarz | NRVD | 100041 | Feb.10, 2006 | Feb.10, 2007 |
| Radio Communication Test Set | Rohde & Schwarz | CMS 54 | 846621/024 | Feb.10, 2006 | Feb.10, 2007 |
| Modulation Analyzer | Hewlett-Packard | 8901B | 2303A00362 | Feb.10, 2006 | Feb.10, 2007 |
| SOHO Telephone Switching System | IKE | 2000-108C | N/A | Feb.10, 2006 | Feb.10, 2007 |
| Temperature Chamber | TABAI | PSL-4GTW | N/A | Feb.10, 2006 | Feb.10, 2007 |
| 3m Semi-Anechoic Chamber | Albatross Projects | 9mX6mX6m | N/A | Feb.10, 2006 | Feb.10, 2007 |