



BNNetzA-CAB-21/21-21

# Test Report

Test report no.: 21065785-20824-0

Date of issue: 2021-09-10

**Test result:** The test item - **passed** - and complies with the listed standards.

## Applicant

Mitsubishi Electric Corporation Sanda Works

## Manufacturer

Mitsubishi Electric Corporation

## Test Item

R1LOW-R-SBM

## RF-Spectrum Testing according to:

### FCC 47 CFR Part 15

Radio Frequency Devices (Subpart C)

### RSS-247, Issue 2 (2017-02)

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

### RSS-Gen, Issue 5 (2018-04)

General Requirements for Compliance of Radio Apparatus

Tested by  
(name, function, signature)

*Karsten Gerald*  
Head of Laboratory RF

signature

Approved by  
(name, function, signature)

*Andreas Bender*  
Head of Laboratory

signature

<b>Applicant and Test item details</b>	
<b>Applicant</b>	Mitsubishi Electric Corporation Sanda Works 2-3-33, Miwa, Sanda-City, Hyogo 669-1513 Japan DESIGN-A SECTION, CAR MULTIMEDIA DESIGN DEPT. Fon: +81 79 559 4813 E-Mail: Yoshinaga.Ryuji@db.MitsubishiElectric.co.jp
<b>Manufacturer</b>	Mitsubishi Electric Corporation 2-3-33, Miwa, Sanda-City, Hyogo 669-1513 Japan DESIGN-A SECTION, CAR MULTIMEDIA DESIGN DEPT. Fon: +81 79 559 4813 E-Mail: Yoshinaga.Ryuji@db.MitsubishiElectric.co.jp
<b>Test item description</b>	Automotive Display Audio
<b>Model/Type reference</b>	R1LOW-R-SBM
<b>Standard specific information</b>	
<b>FCC ID</b>	UJH-R1LOW-R-SBM
<b>IC</b>	662K-R1LOWRSB
<b>PMN</b>	R1LOW-R-SBM
<b>HVIN</b>	NR-0C-R-DV
<b>FVIN</b>	N/A
<b>HMN</b>	N/A
<b>Frequency</b>	2.4 GHz ISM band (2400 – 2483.5 MHz)
<b>Technology</b>	Bluetooth Low Energy (BLE)
<b>Antenna</b>	external PCB antenna
<b>Power supply</b>	9 – 16.5V DC Battery
<b>Temperature range</b>	-40 °C to +75 °C

### Disclaimer and Notes

The content of this test report relates to the mentioned test sample(s) only.  
Without a written permit of IBL-Lab GmbH, this test report shall not be reproduced, except in full.

The last valid version is available at TAMSys®.

Copyright ©: All rights reserved by IBL-Lab GmbH

Within this test report, a ☒ point / ☐ comma is used as a decimal separator.  
If otherwise, a detailed note is added adjoined to its use.

IBL-Lab GmbH does not take test samples. The sample used for testing is provided by the applicant.

Decision rule: Binary Statement for Simple Acceptance Rule according ILAC-G8:09/2019

# 1 TABLE OF CONTENTS

1	TABLE OF CONTENTS .....	3
2	GENERAL INFORMATION .....	4
2.1	Administrative details .....	4
2.2	Possible test case verdicts .....	4
2.3	Observations .....	5
2.4	Opinions and Interpretations .....	5
2.5	Revision History .....	5
2.6	Further documents .....	5
3	ENVIRONMENTAL & TEST CONDITIONS .....	6
3.1	Environmental conditions .....	6
3.2	Normal and extreme test conditions .....	6
4	TEST STANDARDS AND REFERENCES .....	6
5	EQUIPMENT UNDER TEST (EUT) .....	7
5.1	Product Description .....	7
5.2	Test Item Description .....	7
5.3	Technical Data of Equipment .....	7
5.4	Additional Information .....	8
5.5	Test modes .....	8
6	SUMMARY OF TEST RESULTS .....	9
7	TEST RESULTS .....	10
7.1	DTS Bandwidth (6 dB) .....	10
7.2	Occupied Bandwidth (99% OBW) .....	17
7.3	RF Output Power (Conducted Peak Power) .....	24
7.4	Antenna Gain (calculated) .....	27
7.5	Peak Power Spectral Density (PSD) .....	30
7.6	Band Edge Compliance (BEC), conducted .....	37
7.7	Band Edge Compliance (BEC), radiated .....	45
7.8	Conducted Spurious Emissions (CSE) .....	47
7.9	Radiated Spurious Emissions (RSE) .....	55
8	TEST SETUP DESCRIPTION .....	66
8.1	Semi Anechoic Chamber with Ground Plane .....	66
8.2	Fully Anechoic Chamber .....	68
8.3	Radiated measurements > 18 GHz .....	70
8.4	Conducted measurements WLAN test system R&S TS 8997 .....	71
9	MEASUREMENT UNCERTAINTIES .....	72
Annex A	EUT Photographs, external .....	73
Annex B	EUT Photographs, internal .....	83
Annex C	Test Setup Photographs .....	90

## 2 GENERAL INFORMATION

### 2.1 Administrative details

Testing laboratory	<b>IBL-Lab GmbH</b> Heinrich-Hertz-Allee 7 66386 Sankt Ingbert / Germany Fon: +49 6894 38938-0 Fax: +49 6894 38938-99 URL: <a href="http://www.ib-lenhardt.de">www.ib-lenhardt.de</a> E-Mail: <a href="mailto:info@ib-lenhardt.de">info@ib-lenhardt.de</a>
Accreditation	The testing laboratory is accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) in compliance with DIN EN ISO/IEC 17025:2018. Scope of testing and registration number: <ul style="list-style-type: none"> <li>• Electronics <a href="#">D-PL-21375-01-01</a></li> <li>• Electromagnetic Compatibility <a href="#">D-PL-21375-01-02</a></li> <li>• Electromagnetic Compatibility and Telecommunication (FCC requirements) <a href="#">D-PL-21375-01-03</a></li> <li>• Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards <a href="#">D-PL-21375-01-04</a></li> <li>• ISED Company Number 27156</li> <li>• Testing Laboratory CAB Identifier DE0020</li> <li>• Telekommunikation (TK) <a href="#">D-PL-21375-01-05</a></li> </ul> Website DAkKS: <a href="https://www.dakks.de/">https://www.dakks.de/</a>  The Deutsche Akkreditierungsstelle GmbH (DAkKS) is also a signatory to <a href="#">ILAC Mutual Recognition Arrangement</a>
Testing location	<b>IBL-Lab GmbH</b> Heinrich-Hertz-Allee 7 66386 St. Ingbert / Germany
Date of receipt of test samples	2021-07-07
Start – End of tests	2021-07-08 – 2021-09-07

### 2.2 Possible test case verdicts

Test sample meets the requirements	P (PASS)
Test sample does not meet the requirements	F (FAIL)
Test case does not apply to the test sample	N/A (Not applicable)
Test case not performed	N/P (Not performed)

### 2.3 Observations

No additional observations other than the reported observations within this test report have been made.

### 2.4 Opinions and Interpretations

No appropriate opinions or interpretations according ISO/IEC 17025:2017 clause 7.8.7 are within this test report.

### 2.5 Revision History

-0 Initial Version

### 2.6 Further documents

List of further applicable documents belonging to the present test report:  
- no additional documents -

### 3 ENVIRONMENTAL & TEST CONDITIONS

#### 3.1 Environmental conditions

Temperature	20°C ± 5°C
Relative humidity	25-75 % r.H.
Barometric Pressure	860-1060 mbar
Power supply	230 V / 50 Hz

#### 3.2 Normal and extreme test conditions

	minimum	nominal	maximum
Temperature	-/-	+25 °C	-/-
Relative humidity	-/-	50 % r.h.	-/-
Power supply	-/-	12.6 V DC	-/-

### 4 TEST STANDARDS AND REFERENCES

Test standard (accredited)	Description
<b>FCC 47 CFR Part 15</b>	Radio Frequency Devices (Subpart C)
<b>RSS-247, Issue 2 (2017-02)</b>	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
<b>RSS-Gen, Issue 5 (2018-04)</b>	General Requirements for Compliance of Radio Apparatus

Test standard (not accredited)	Description
none	---

Reference	Description
<b>ANSI C63.4-2014</b>	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI C63.10-2013</b>	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
<b>558074 D01 15.247 Meas Guide v05r02</b>	Guidance for compliance measurements on digital transmission systems, frequency hopping spread spectrum systems and hybrid system devices operating under section 15.247 of the FCC rules

## 5 EQUIPMENT UNDER TEST (EUT)

### 5.1 Product Description

Automotive Display Audio

\*: as declared by applicant

### 5.2 Test Item Description

<b>Model name*</b>	R1LOW-R-SBM
<b>Serial numbers R1LOW-R-SBM test samples*</b>	radiated EUT: 61314 conducted EUT: 61313
<b>Serial numbers R1LOW-R test samples*</b>	conducted EUT: 60337
<b>PCB identifier*</b>	NJ00193611
<b>Hardware status*</b>	NR-0C-R-DV
<b>Software status*</b>	Android 10

\*: as declared by applicant; please see Annex A, B for EUT photographs.


### 5.3 Technical Data of Equipment

<b>Operational frequency band*</b>	2.4 GHz ISM band (2400 – 2483.5 MHz)
<b>Transmitter*</b>	Chip QCA6574AU with 48 MHz TCXO (Module UGKZ5A3006A)
<b>Technology</b>	Bluetooth Low Energy (BLE)
<b>Modulation type*</b>	GFSK
<b>Data rate*</b>	1 Mb/s
<b>Number of channels*</b>	40 (3 advertising channels / 37 data channels)
<b>Channel bandwidth*</b>	2 MHz
<b>Channel spacing*</b>	2 MHz
<b>Rated RF Output Power*</b>	< 2.5 mW (+4 dBm); Power Class: Class2
<b>Antenna R1LOW-R-SBM model*</b> Part name Antenna 0	external PCB antenna P68306857AA/00534042660 #0
<b>Antenna gain R1LOW-R-SBM model *</b>	Antenna 0: 1.85 dBi
<b>Antenna R1LOW-R model*</b> Part name Antenna 0	Sheet metal antenna, 2342059-2
<b>Antenna gain R1LOW-R model*</b>	Antenna 0: -3.55 dBi
<b>Power supply*</b>	9 – 16.5V DC Battery
<b>Temperature range*</b>	-40 °C to +75 °C

\*: as declared by applicant

5.4 Additional Information	
<b>Model differences</b>	<ul style="list-style-type: none"> <li>• R1LOW-R-SBM model with external antenna and disassociated display</li> <li>• R1LOW-R model with integrated sheet metal antenna and associated display</li> </ul> <p><b>Applicant declares that transmitter modul and PCB are identical in both models</b></p> <p>Conducted R1LOW-R test sample is used for following test cases:</p> <ul style="list-style-type: none"> <li>• DTS bandwidth (6 dB)</li> <li>• Occupied Channel Bandwidth (99%)</li> <li>• Peak power spectral density (PSD)</li> <li>• Band edge compliance (BEC), conducted</li> <li>• Conducted spurious emissions (CSE)</li> </ul> <p>Conducted R1LOW-R-SBM test sample is used for following test cases:</p> <ul style="list-style-type: none"> <li>• RF output power (conducted peak power)</li> </ul> <p>Radiated R1LOW-R-SBM test sample is used for following test cases:</p> <ul style="list-style-type: none"> <li>• Antenna gain (calculated)</li> <li>• Band edge compliance (BEC), radiated</li> <li>• Radiated spurious emissions (RSE)</li> </ul>
<b>Ancillaries tested with</b>	None
<b>Additional equipment used for testing</b>	Notebook with test tool

5.5 Test modes	
<b>Mode 1</b>	GFSK, 1 Mbit/s
<b>Low Channel</b>	CH37 = 2402 MHz
<b>Mid Channel</b>	CH17 = 2440 MHz
<b>High Channel</b>	CH39 = 2480 MHz

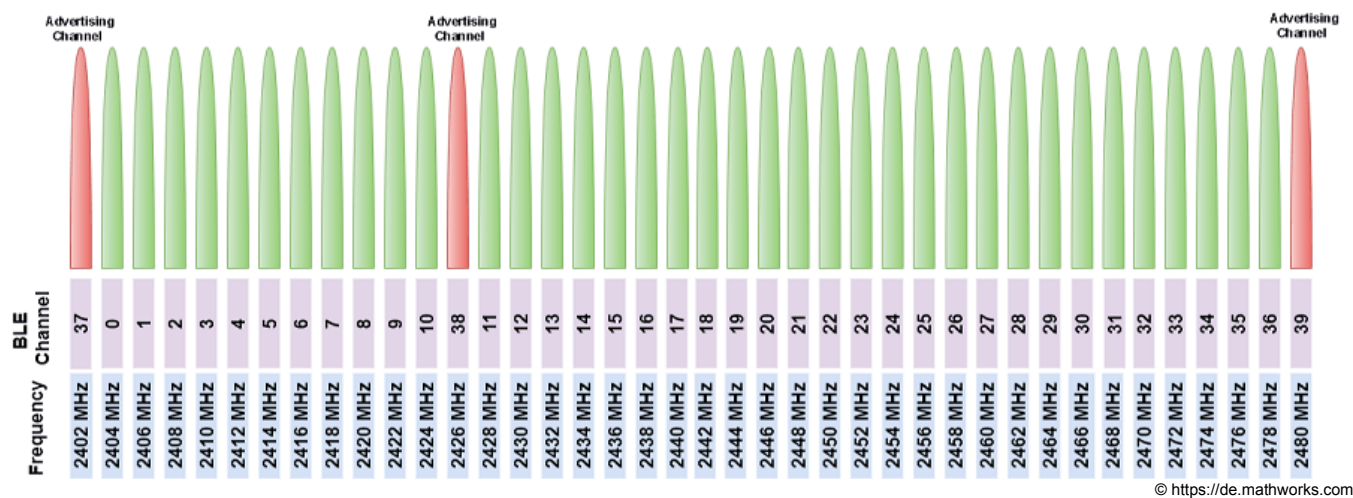

© <https://de.mathworks.com>



## 6 SUMMARY OF TEST RESULTS

Test specification
<b>FCC 47 CFR Part 15</b> <b>RSS-247, Issue 2 (2017-02) / RSS-Gen, Issue 5 (2018-04)</b>

Clause	Requirement / Test Case	Result - Remark	Verdict
§15.247(a)(2) RSS-247, 5.2 (a)	DTS bandwidth (6 dB)	KDB 558074, clause: 8.2	- PASS -
RSS Gen, 6.7	Occupied bandwidth (99%)	-/-	- PASS -
§15.247(b)(3) RSS-247, 5.4 (d)	RF output power (conducted peak power)	KDB 558074, clause: 8.3.1	- PASS -
§15.247(b)(4) RSS-247, 5.4 (d)	Antenna gain (calculated)	-/-	- PASS -
§15.247(e) RSS-247, 5.2 (b)	Peak power spectral density (PSD)	KDB 558074, clause: 8.4	- PASS -
§15.247(d) RSS-247, 5.5	Band edge compliance (BEC), conducted	KDB 558074, clause: 8.5	- PASS -
§15.247(d) RSS-247, 5.5	Band edge compliance (BEC), radiated	KDB 558074, clause: 8.7	- PASS -
§15.247(d) RSS-247, 5.5	Conducted spurious emissions (CSE)	KDB 558074 DTS clause: 8.5	- PASS -
15.247(d) / §15.209 RSS-247, 5.5 / RSS-Gen, 8.9	Radiated spurious emissions (RSE)	-/-	- PASS -
§15.207 RSS-Gen, 8.8	AC conducted emissions	EUT is battery powered	- N/A -

### Comments and observations

Following pages show requirements and references of FCC Part 15.247, ANSI C63.10 and KDB 558074 only. Same tests are also applicable and valid for RSS-247, with clauses given in table above.

## 7 TEST RESULTS

### 7.1 DTS Bandwidth (6 dB)

**Applicability**

This requirement applies to all types of DTS equipment.

**Description**

The DTS Bandwidth is defined as the 6 dB bandwidth.

**Limit**

§15.247

(a)(2) The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test procedure**

ANSI C63.10, 11.8

The steps are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The automatic bandwidth measurement capability of an instrument may be employed using the 6 dB bandwidth mode.

**Test setup:** 8.4 with conducted test sample 60337 (see section 5.2)

**Test Results**

EUT Mode	DTS Bandwidth (6 dB)			Limit [kHz]
	low channel [kHz]	mid channel [kHz]	high channel [kHz]	
Mode 1	712.9	712.9	712.9	$\geq 500$


**Comment:**

---

<b>Verdict</b>	- PASS -	see next plots
----------------	----------	----------------

Plot 1: Mode 1, DTS Bandwidth, low channel


6 dB Bandwidth

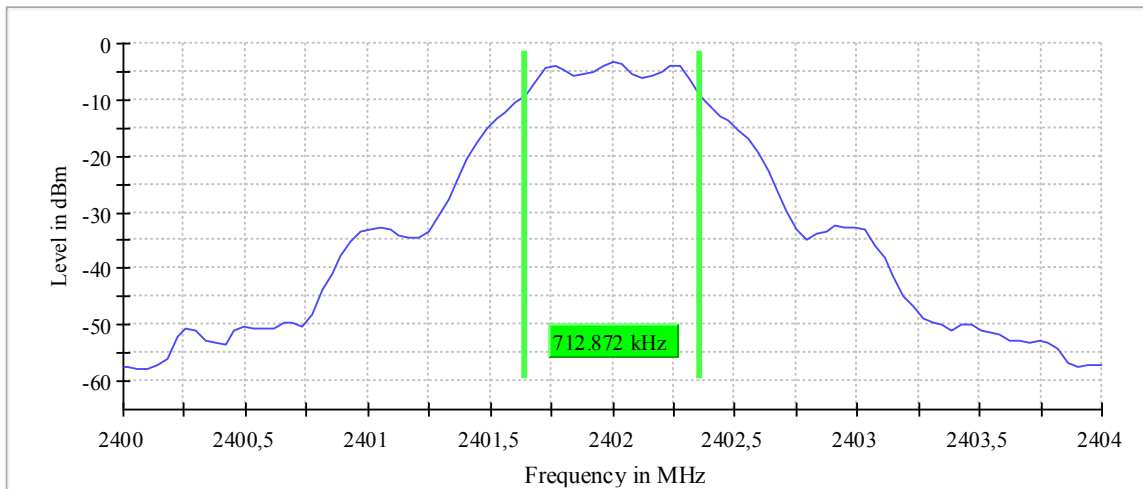

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.712872	0.500000	---	2401.643564	2402.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-3.3	PASS

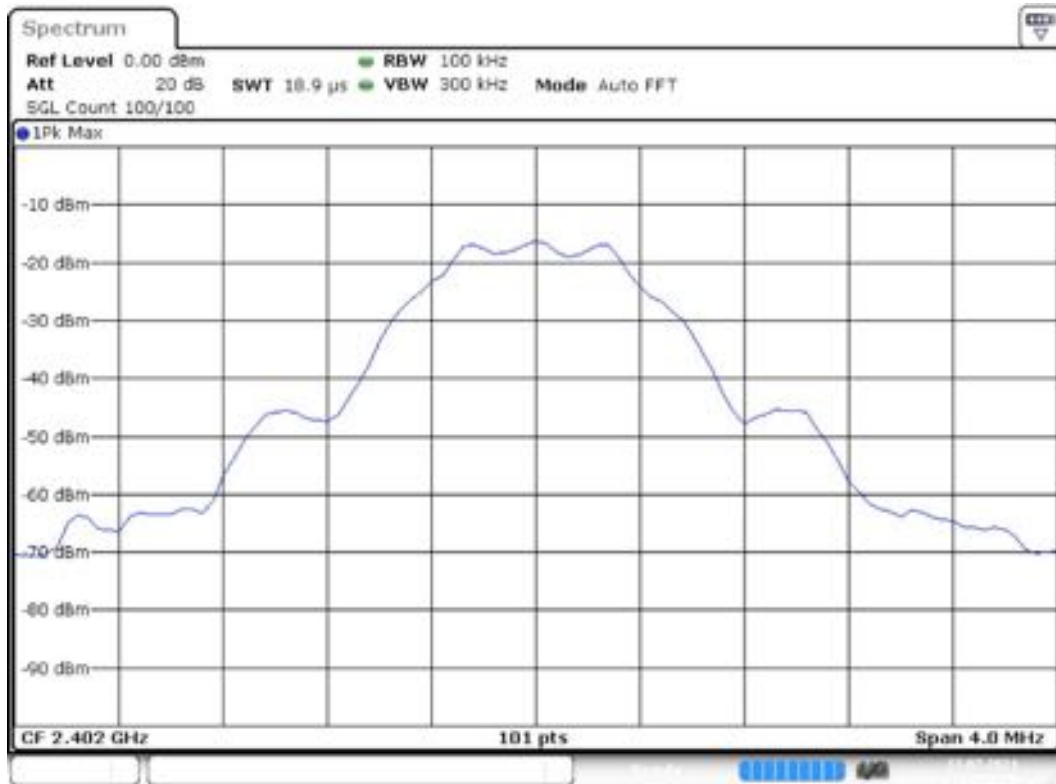


Date: 13.JUL.2021 11:41:08

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweeptime	18.938 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.01 dB	0.50 dB

Plot 2: Mode 1, DTS Bandwidth, mid channel


6 dB Bandwidth

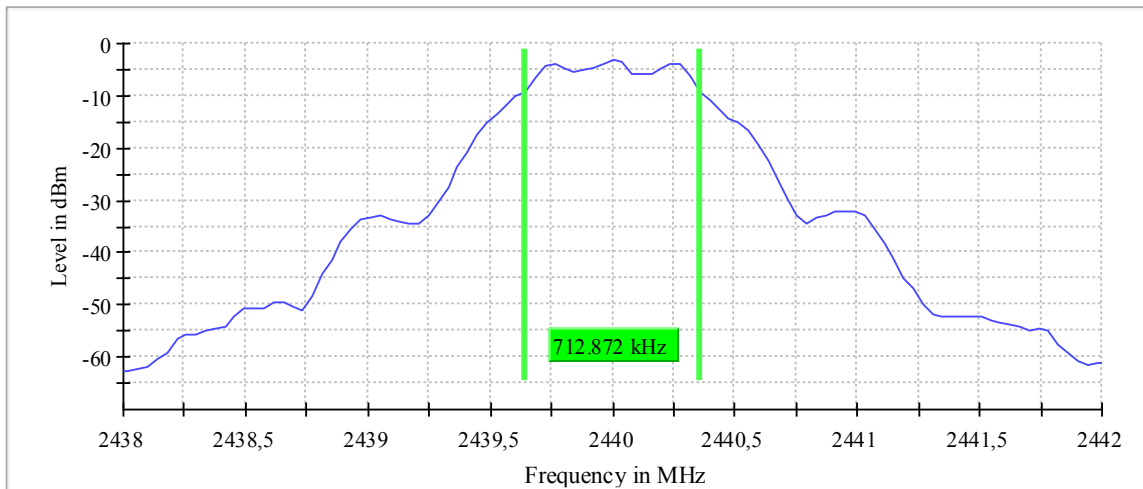

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.712872	0.500000	---	2439.643564	2440.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	-3.1	PASS

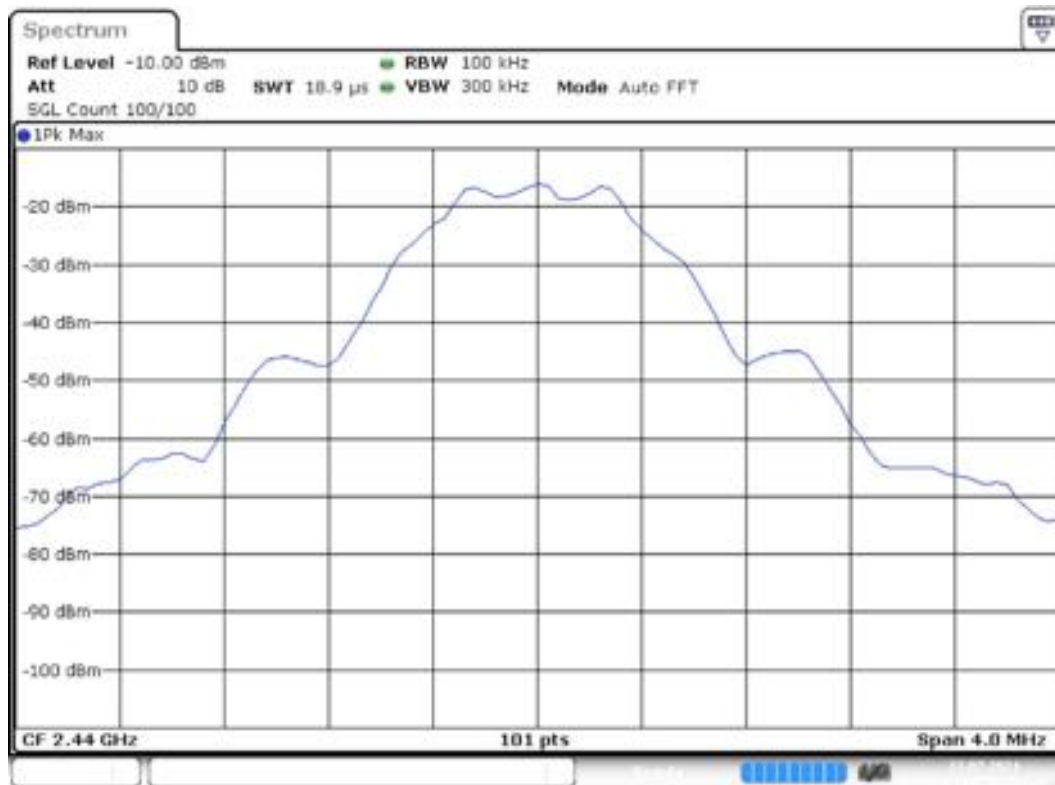


Date: 13 JUL 2021 11:45:02

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweeptime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Plot 3: Mode 1, DTS Bandwidth, high channel


6 dB Bandwidth

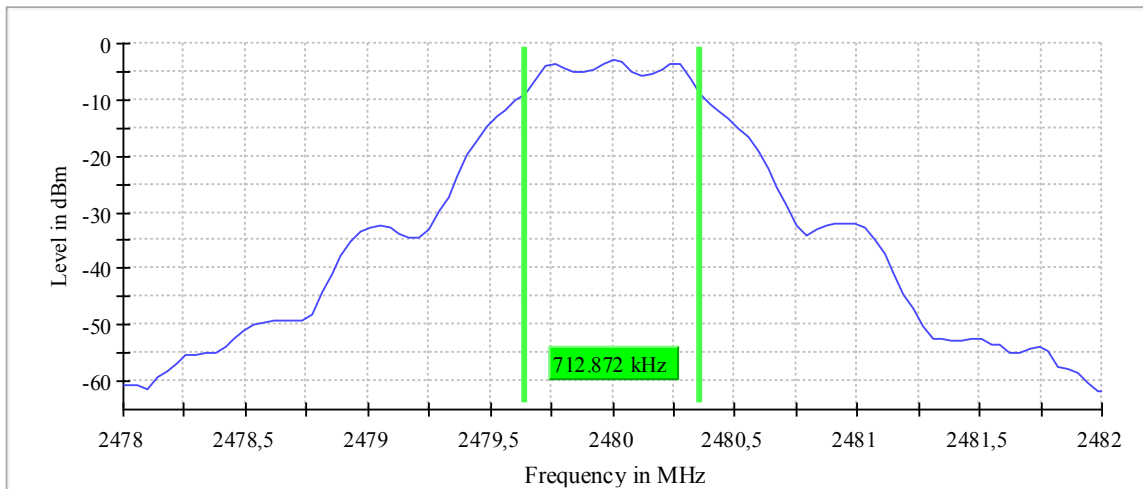

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.712872	0.500000	---	2479.643564	2480.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-2.9	PASS

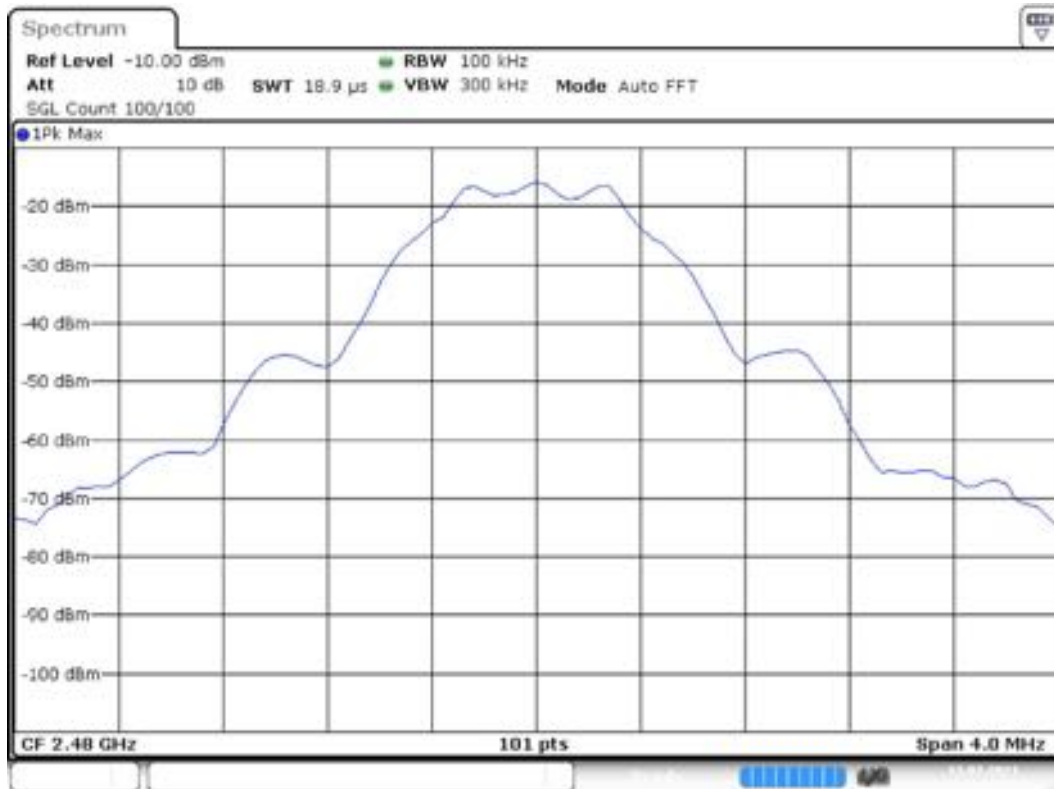

Date: 13 JUL 2021 11:50:35

## Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweeptime	18.938 $\mu$ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.34 dB	0.50 dB



<b>7.2 Occupied Bandwidth (99% OBW)</b>			
<b>Applicability</b> This requirement applies to all types of DTS equipment.			
<b>Description</b> The Occupied Channel Bandwidth is the bandwidth that contains 99 % of the power of the signal (RSS-Gen).			
<b>Limit</b> No limit defined.			
<b>Test procedure</b> ANSI C63.10, 6.9.3 The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies. h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).			
<b>Test setup:</b> 8.4 with conducted test sample 60337 (see section 5.2)			
<b>Test Results</b>			
EUT Mode	Occupied Bandwidth (99%)		
	low channel [kHz]	mid channel [kHz]	high channel [kHz]
Mode 1	1050	1050	1050
<b>Comment:</b>	---		
<b>Verdict</b>	<b>- PASS -</b>		see next plots

Plot 4: Mode 1, 99% Occupied Bandwidth, low channel


99 % Bandwidth

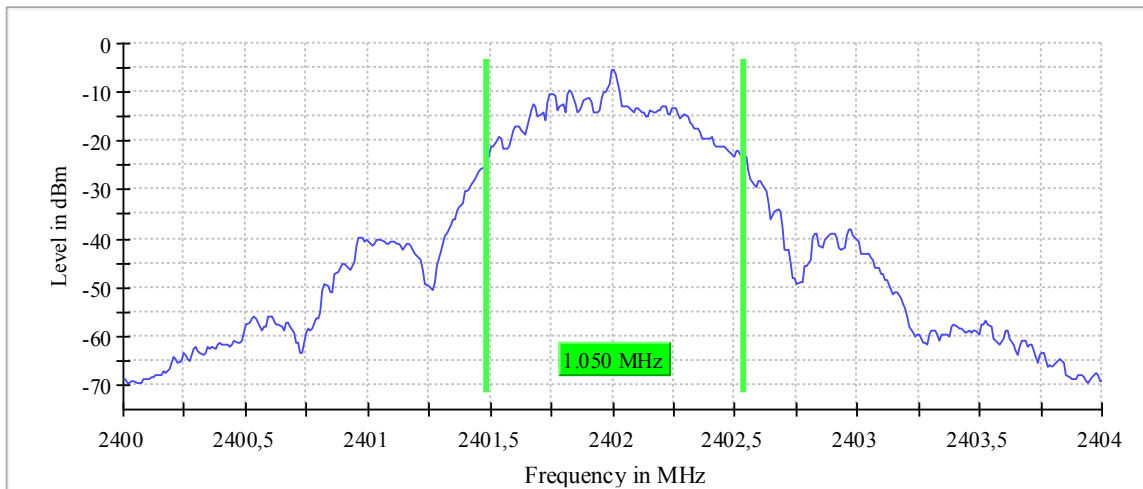

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.050000	---	---	2401.485000	2402.535000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

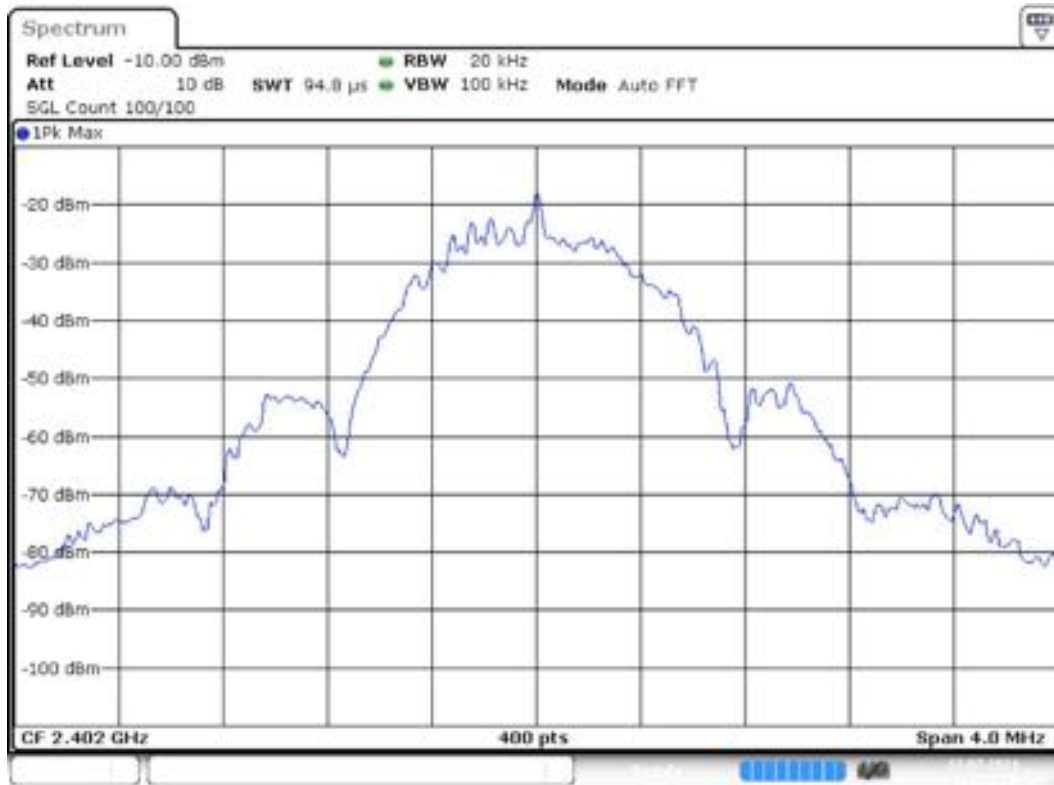


Date: 13 JUL 2021 11:41:56

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Plot 5: Mode 1, 99% Occupied Bandwidth, mid channel


99 % Bandwidth

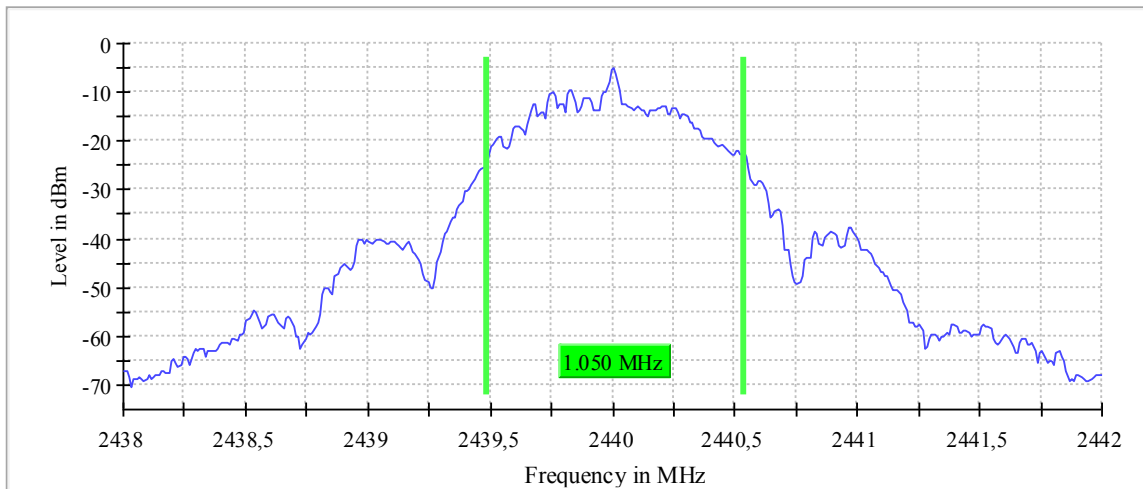

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.050000	---	---	2439.485000	2440.535000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

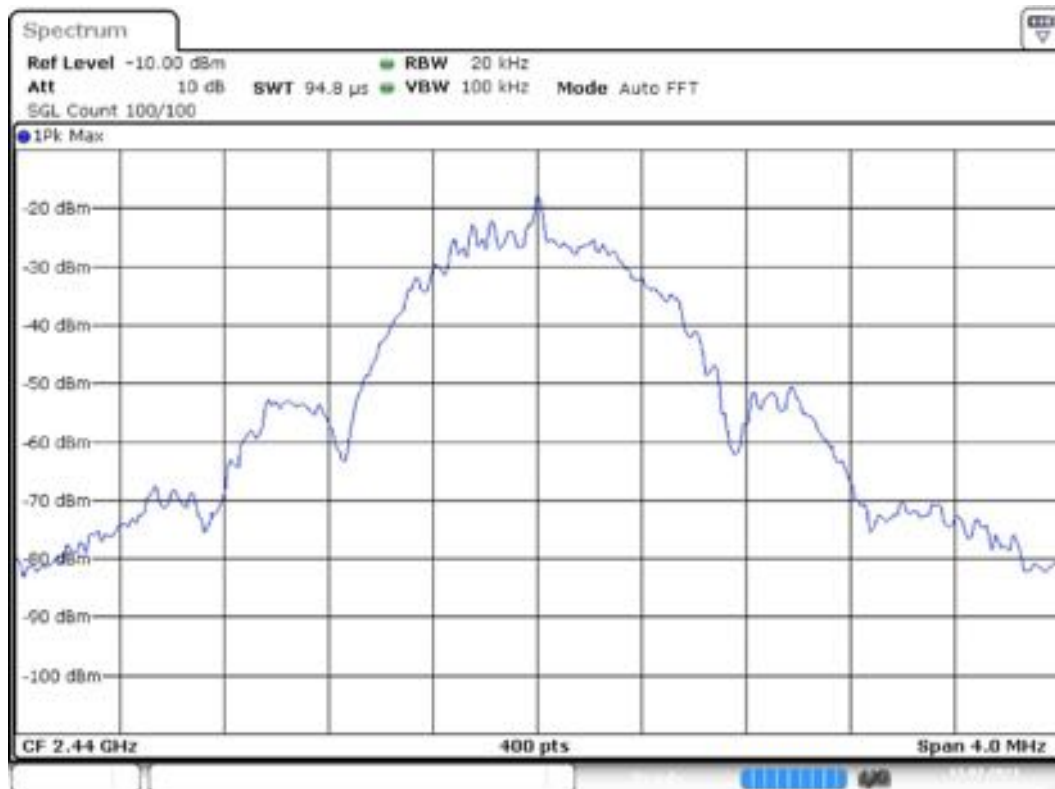


Date: 13 JUL 2021 11:45:29

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.30 dB

Plot 6: Mode 1, 99% Occupied Bandwidth, high channel


99 % Bandwidth

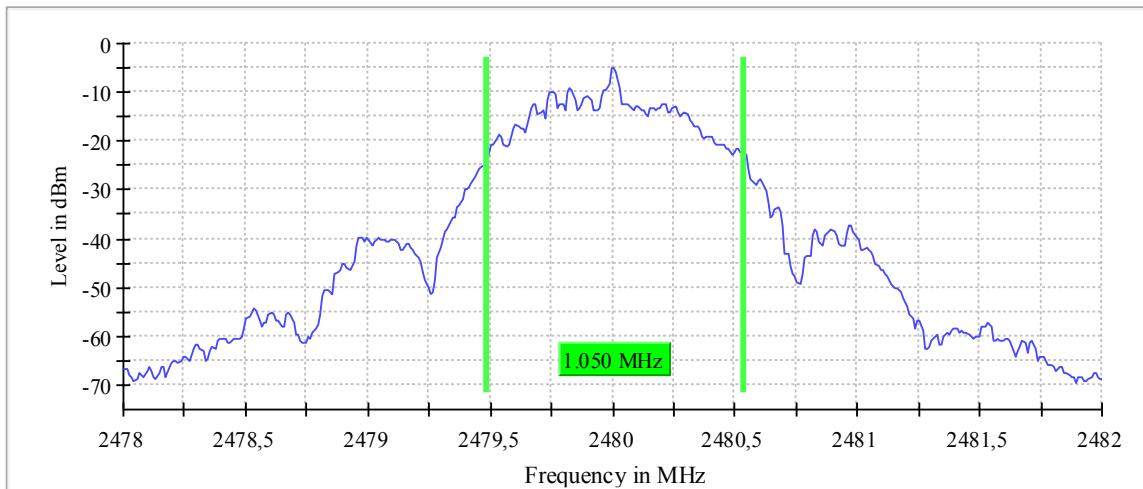

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.050000	---	---	2479.485000	2480.535000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

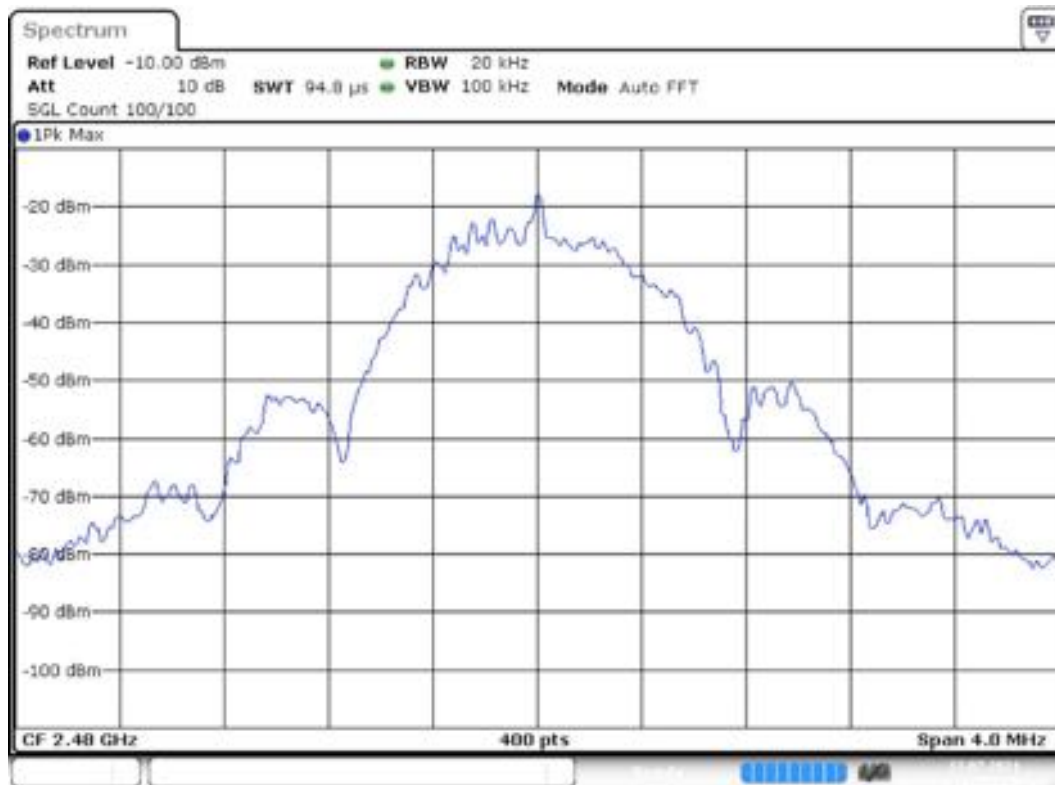

Date: 13 JUL 2021 11:51:04

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB

### 7.3 RF Output Power (Conducted Peak Power)

#### Applicability

This requirement applies to all types of DTS equipment.

#### Description

The RF Output Power is defined as the conducted peak output power.

#### Limit

§15.247

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

#### Test procedure

ANSI C63.10, 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq$  [3  $\times$  RBW].
- c) Set span  $\geq$  [3  $\times$  RBW].
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Test setup:** 8.4 with conducted test sample 61313 (see section 5.2)

#### Test Results


EUT Mode	RF Output Power (Conducted Peak Power)			Limit [dBm]
	low channel [dBm]	mid channel [dBm]	high channel [dBm]	
CW-mode	2.3	3.5	3.5	30

**Comment:** As worst case this test was performed in CW-mode.

<b>Verdict</b>	- PASS -	see next plots
----------------	----------	----------------




Plot 7: Mode 1, Peak Power, low channel

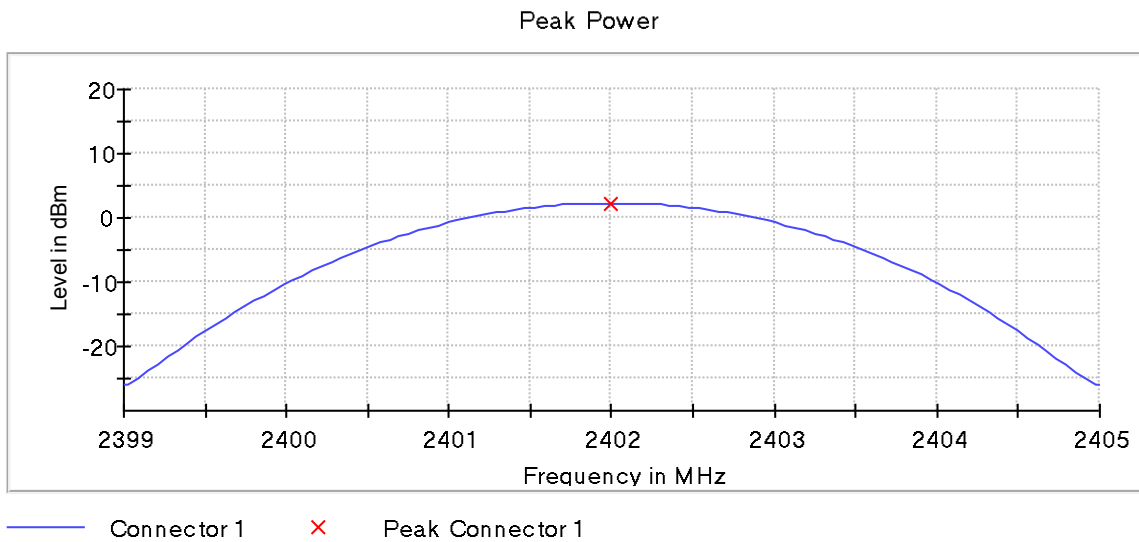


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	2.3	30.0	PASS

Plot 8: Mode 1, Peak Power, mid channel

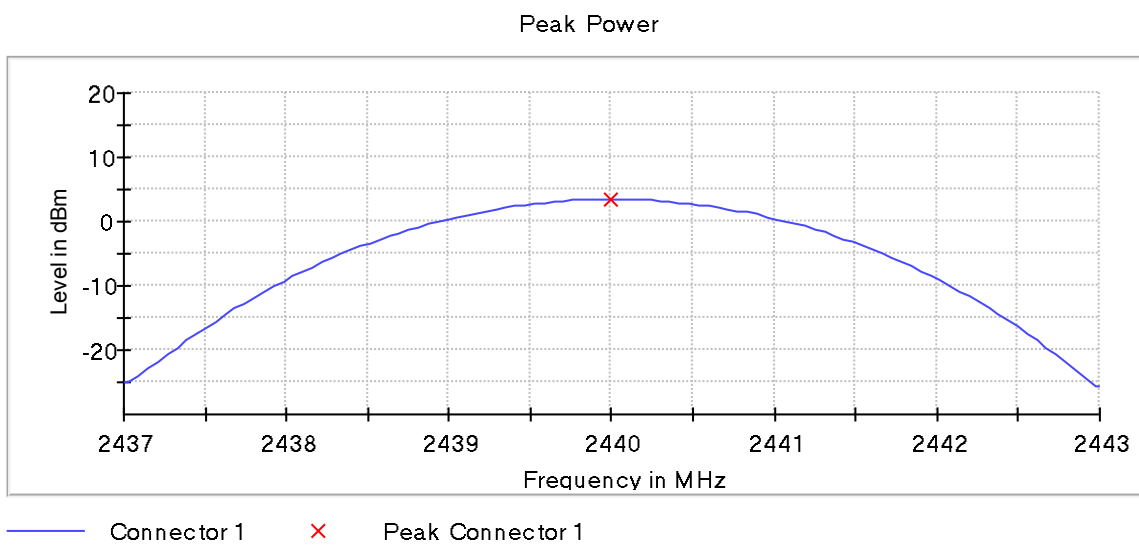

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2440.000000	3.5	30.0	PASS

Plot 9: Mode 1, Peak Power, high channel

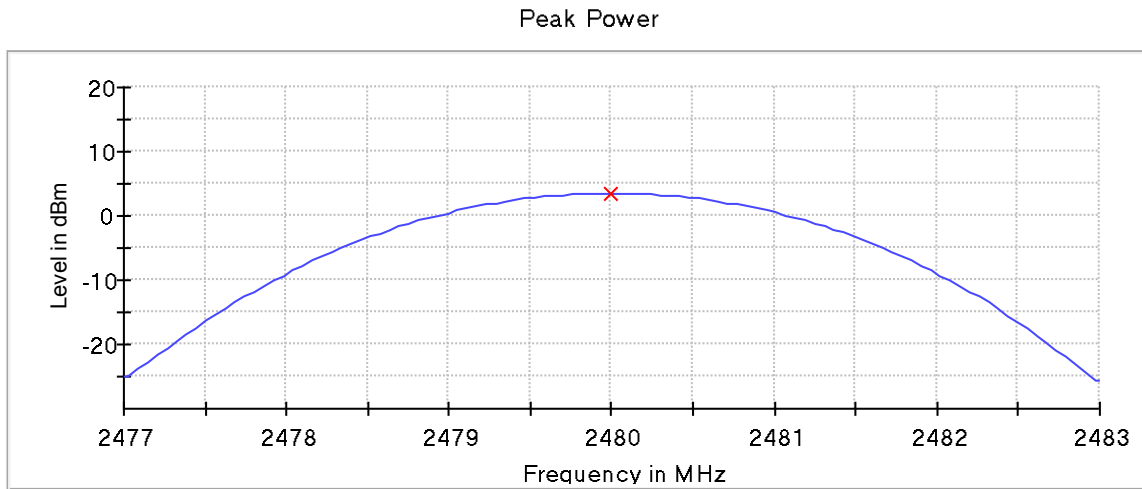

— Connector 1    × Peak Connector 1




DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2480.000000	3.5	30.0	PASS

<b>7.4 Antenna Gain (calculated)</b>				
<b>Applicability</b> This requirement applies to all types of DTS equipment.				
<b>Description</b> The antenna gain is defined as the difference between radiated peak power (Peak EIRP) subtracted by the conducted peak power of the module, given in dBi.				
<b>Limit</b> §15.247 (b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.				
<b>Test setup:</b> 8.2 with radiated test sample 61314 (see section 5.2), 8.4 with conducted test sample 61313 (see section 5.2)				
<b>Test Results</b>				
Mode 1	low channel	mid channel	high channel	Limit
Radiated peak power [dBm]	4.0	6.3	6.5	36
Conducted peak power [dBm]	2.3	3.5	3.5	30
Calculated antenna gain [dBi]	1.7	2.8	3.0	6


<b>Comment:</b>	As worst case this test was performed in CW-mode.
-----------------	---

<b>Verdict</b>	<b>- PASS -</b>	see next plots*
----------------	-----------------	-----------------


\*description of line and marker for all radiated Peak Power measurements:

-  positive Peak (Max Hold) trace during pre-scan
-  Max Peak value
-  final Quasi Peak value


Plot 10: Mode 1, Peak EIRP, low channel

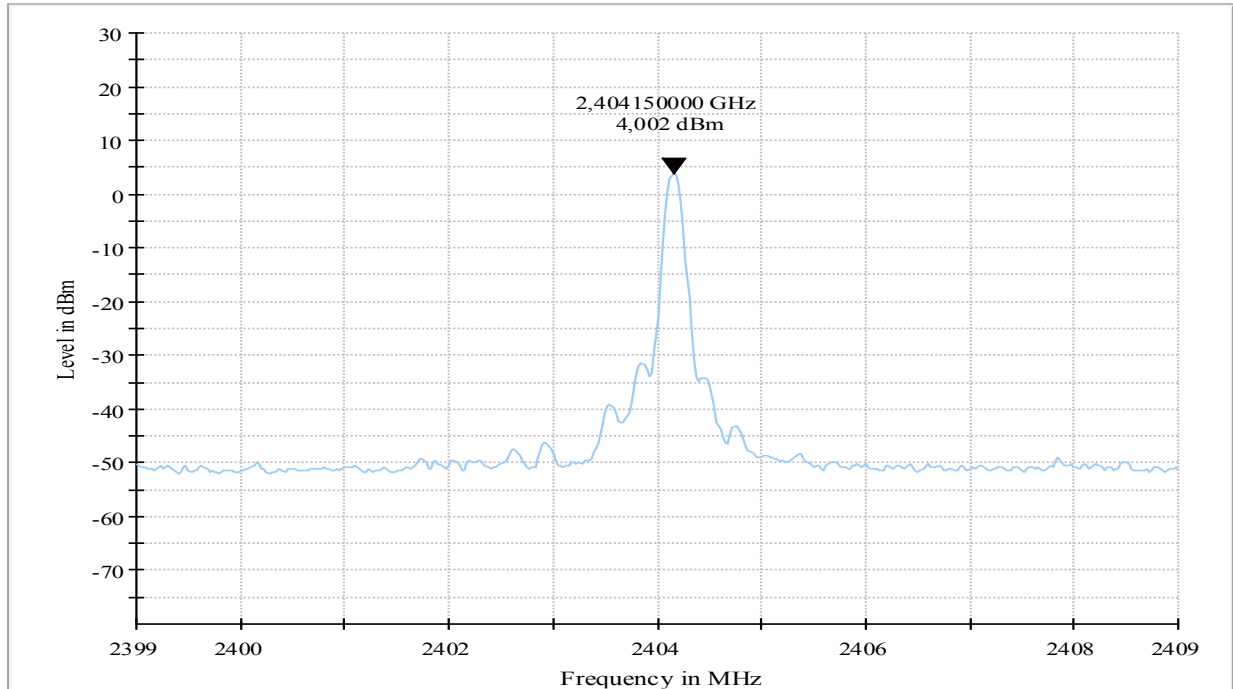

Plot 11: Mode 1, Peak EIRP, mid channel

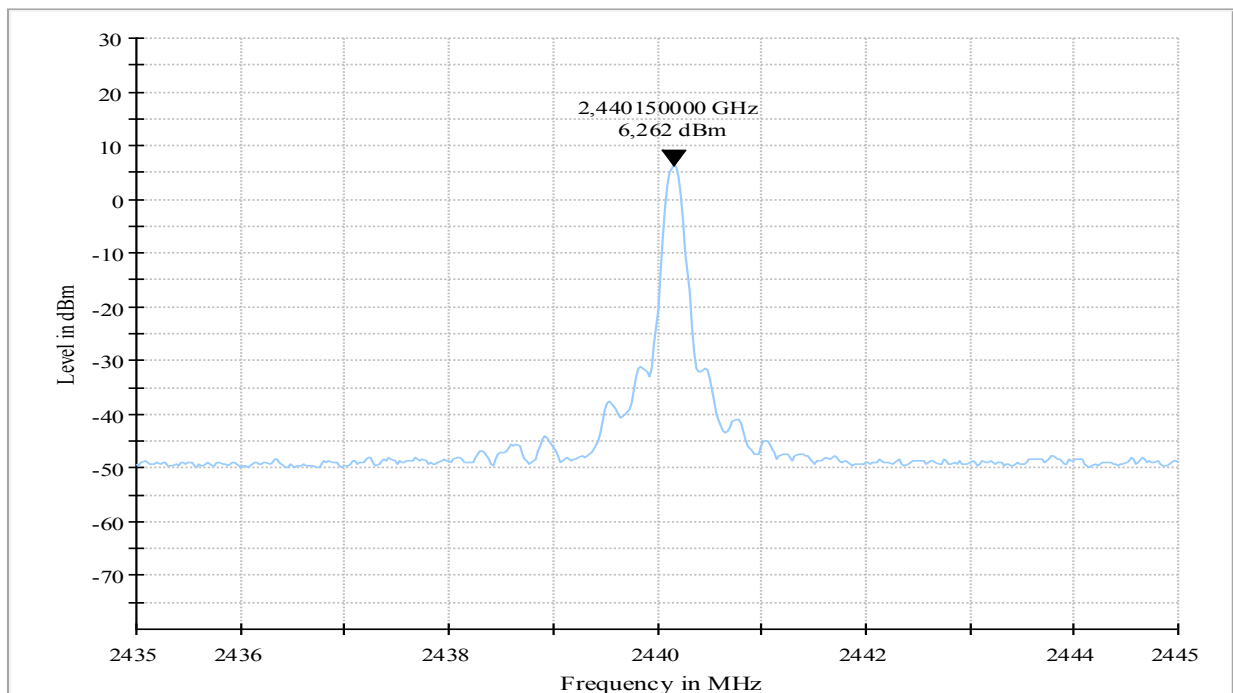

Plot 12: Mode 1, Peak EIRP, high channel

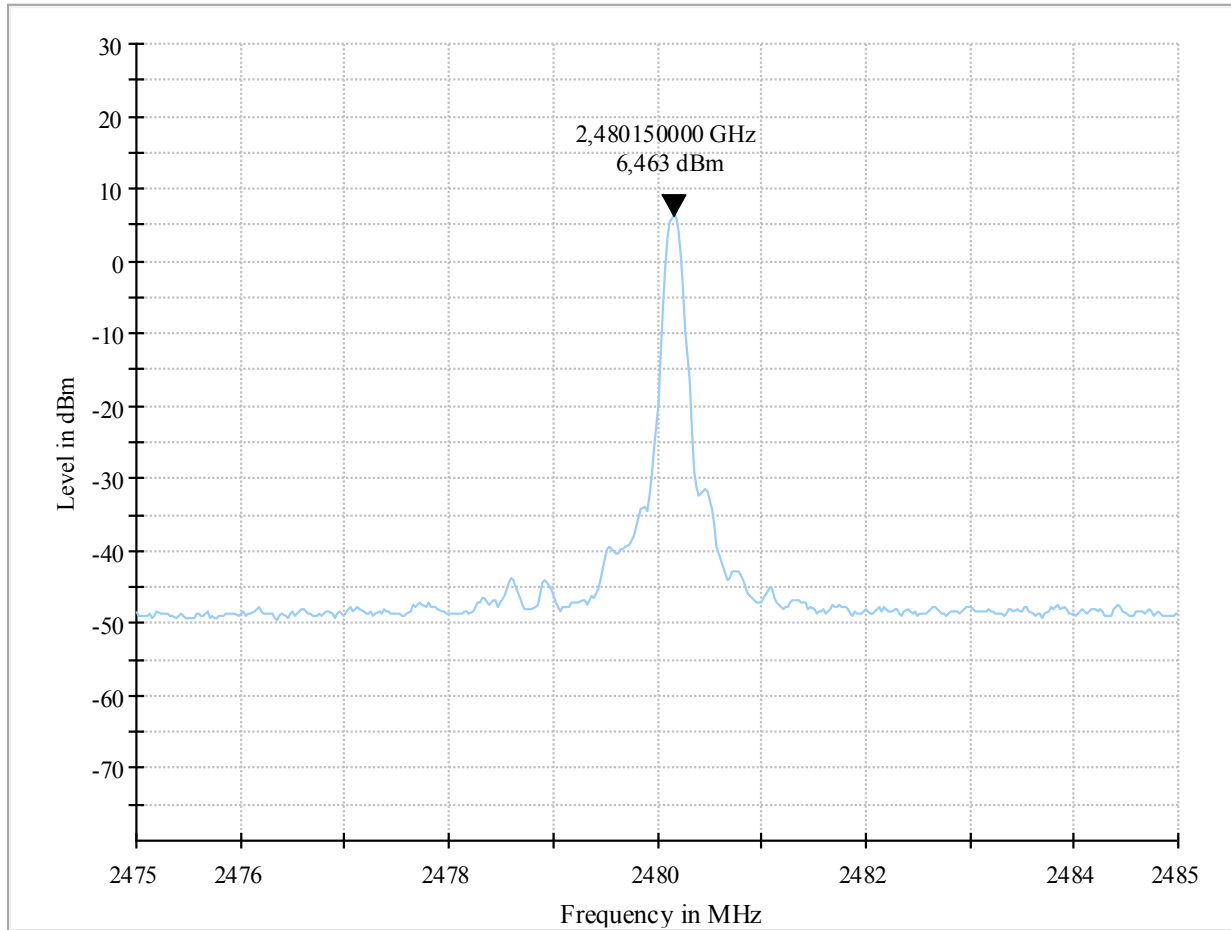

## 7.5 Peak Power Spectral Density (PSD)

**Applicability**  
This requirement applies to all types of DTS equipment.

**Description**  
The Power Spectral Density (PSD) is defined as the conducted peak power spectral density in a 3 kHz bandwidth during any time of continuous transmission.

**Limits**  
§15.247  
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

**Test procedure**  
ANSI C63.10, 11.10.2  
The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:  
a) Set analyzer center frequency to DTS channel center frequency.  
b) Set the span to 1.5 times the DTS bandwidth.  
c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .  
d) Set the VBW  $\geq [3 \times \text{RBW}]$ .  
e) Detector = peak.  
f) Sweep time = auto couple.  
g) Trace mode = max hold.  
h) Allow trace to fully stabilize.  
i) Use the peak marker function to determine the maximum amplitude level within the RBW.  
j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

**Test setup:** 8.4 with conducted test sample 60337 (see section 5.2)


<b>Test Results</b>				
EUT Mode	Peak Power Spectral Density [dBm / 3 kHz]			Limit [dBm / 3 kHz]
	low channel	mid channel	high channel	
Mode 1	-9.6	-9.4	-9.2	8

**Comment:** ---

<b>Verdict</b>	<b>- PASS -</b>	see next plots
----------------	-----------------	----------------


Plot 13: Mode 1, Peak PSD, low channel

Peak Power Spectral Density

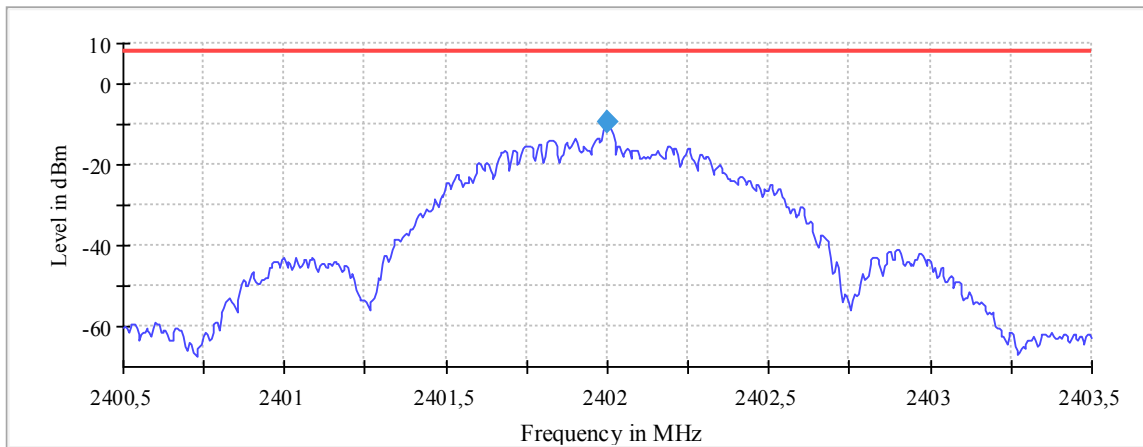

— Limit    — Sum Level    ◆ PSD

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2402.000000	2401.997500	-9.563	8.0	PASS

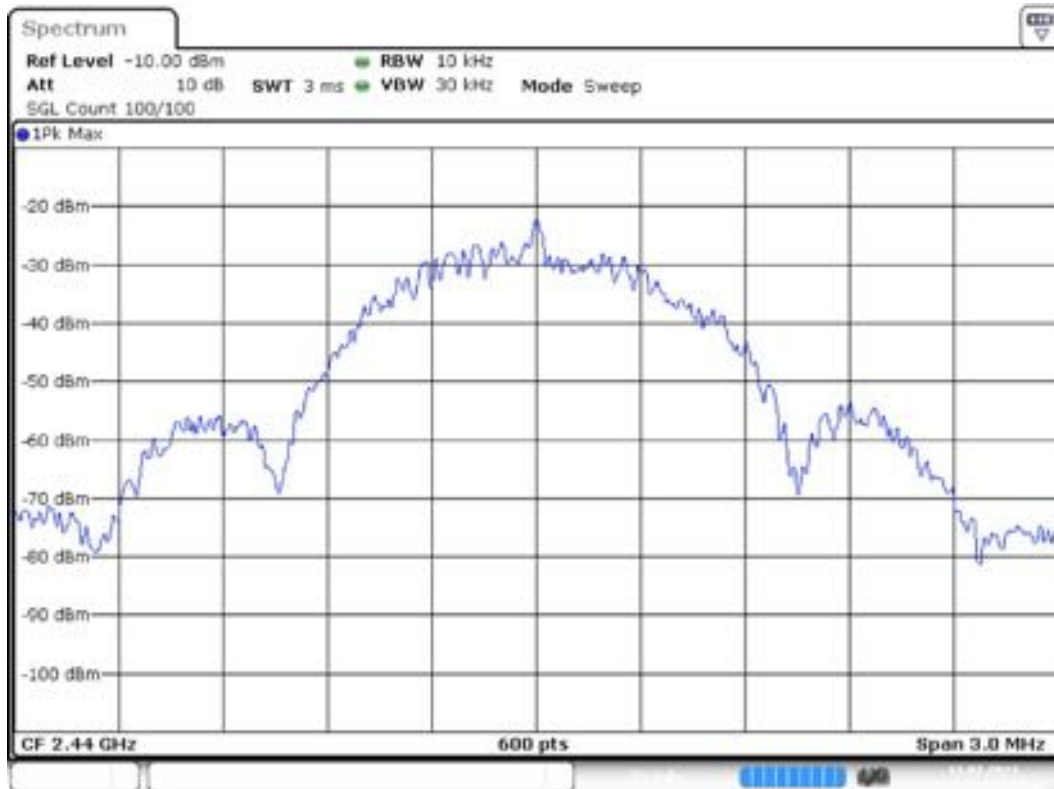

Date: 13 JUL 2021 11:45:11


## Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43850 GHz	2.43850 GHz
Stop Frequency	2.44150 GHz	2.44150 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
Sweeptime	3.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	3 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.31 dB	0.50 dB




Plot 14: Mode 1, Peak PSD, mid channel

Peak Power Spectral Density

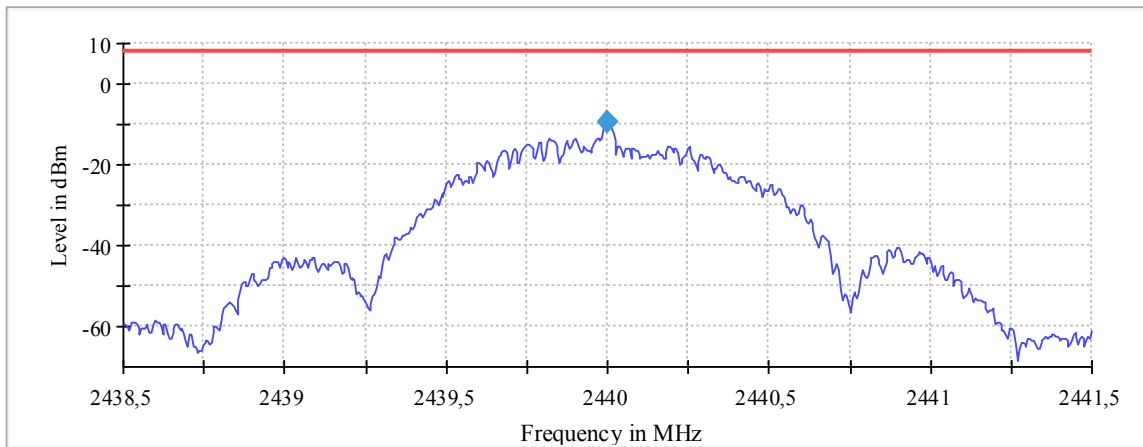

— Limit    — Sum Level    ◆ PSD

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2440.000000	2439.997500	-9.403	8.0	PASS

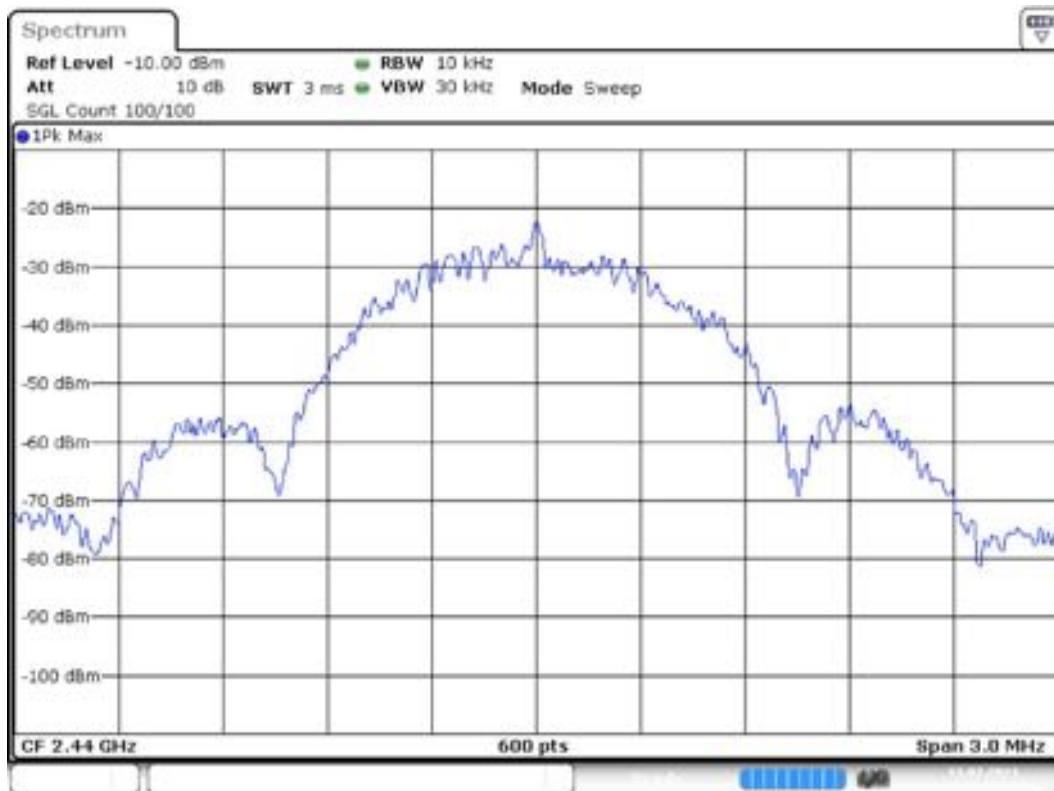


Date: 13 JUL 2021 11:45:11

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43850 GHz	2.43850 GHz
Stop Frequency	2.44150 GHz	2.44150 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
Sweeptime	3.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	3 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.31 dB	0.50 dB


Plot 15: Mode 1, Peak PSD, high channel

Peak Power Spectral Density

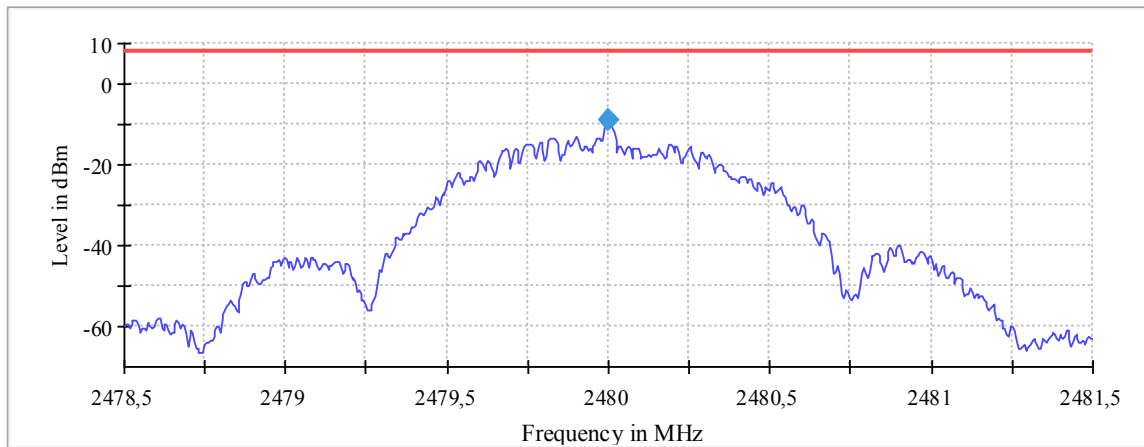

— Limit    — Sum Level    ◆ PSD

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2480.000000	2479.997500	-9.210	8.0	PASS

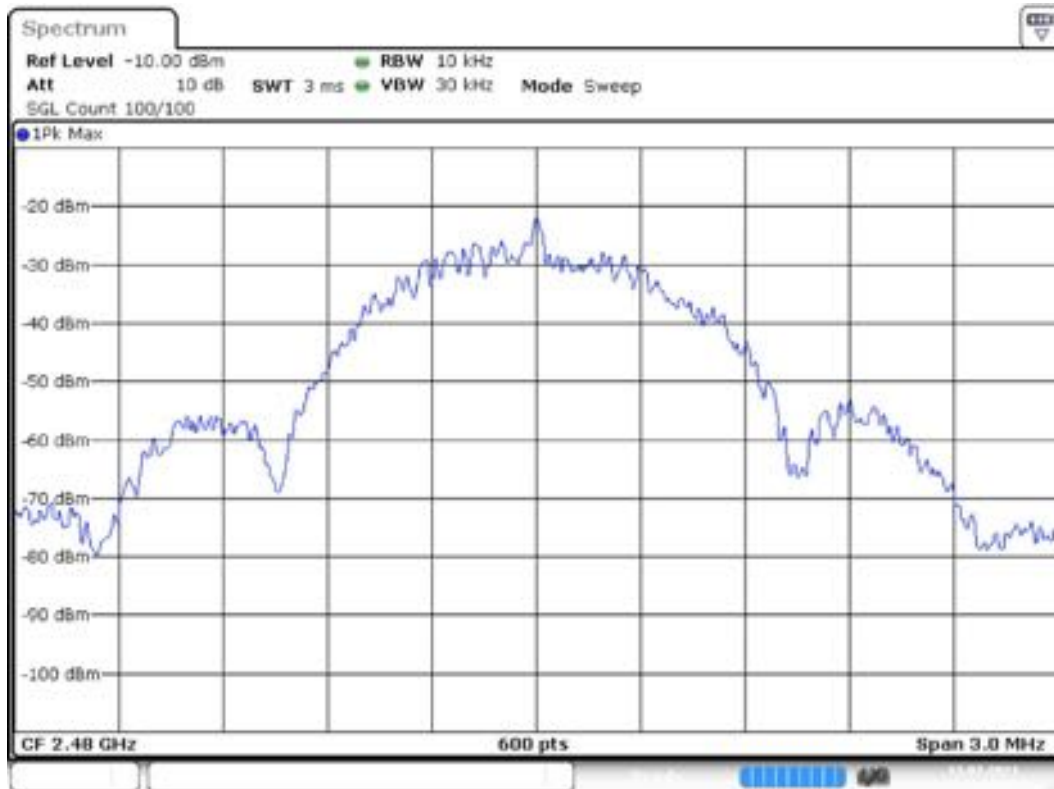

Date: 13 JUL 2021 11:50:45

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47850 GHz	2.47850 GHz
Stop Frequency	2.48150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	600	~ 600
Sweeptime	3.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.13 dB	0.50 dB

## 7.6 Band Edge Compliance (BEC), conducted

### Applicability

This requirement applies to all types of DTS equipment.

### Description

Emissions within a restricted band and within 2 MHz of an authorized band edge may be measured using either the marker-delta method (ANSI C63.10, 6.10.6) or the integration method (ANSI C63.20, 11.13.3), provided that the DTS bandwidth (or EBW) edge falls within 2 MHz of the band edge. Otherwise, all unwanted emissions measurements shall be performed using the standard methods.

### Limits

§15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in §15.209(a) is not required.

### Test procedure

ANSI C63.10, 11.11

#### Reference level measurement:

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to  $\geq 1.5$  times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.
- Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### Emission level measurement:

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements as specified ( $\geq 20$  dBc).

The marker-delta method, as described in ANSI C63.10, 6.10.6 can be used to perform measurements of the radiated unwanted emissions level at the band-edges provided that the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.

**Test setup:** 8.4 with conducted test sample 60337 (see section 5.2)


**Test results**

BEC	low channel [dBc]	high channel [dBc]	Limit [dBc]
Mode 1	> 50	> 55	≥ 20

**Comment:** ---

<b>Verdict</b>	- PASS -	see next plots
----------------	----------	----------------

Plot 16: Mode 1, BEC, low channel

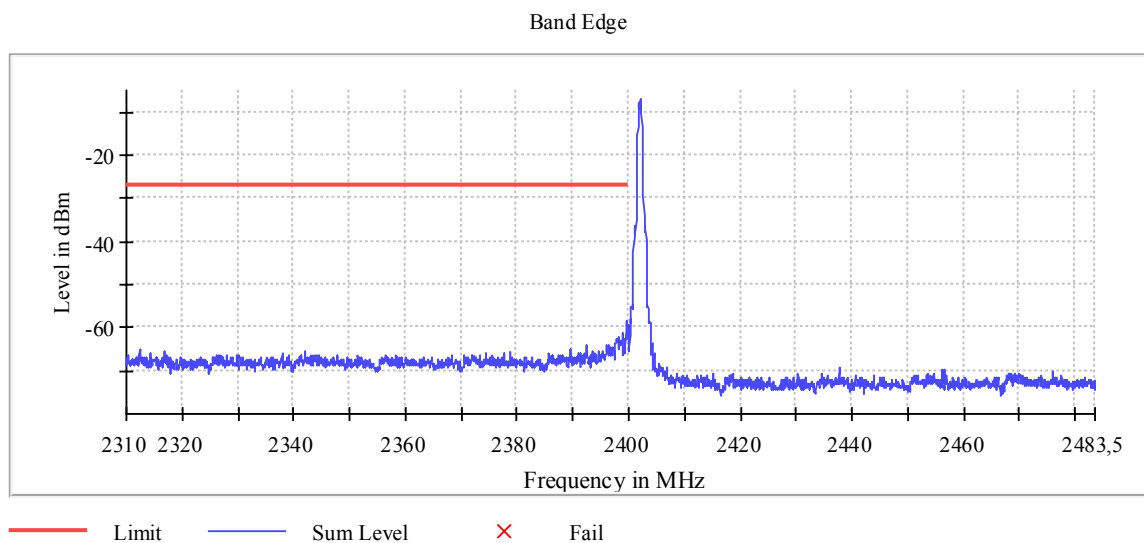

### Result



DUT Frequency (MHz)	Result
2402.000000	PASS

### Inband Peak

Frequency (MHz)	Level (dBm)
2402.025000	-6.9

### Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.625000	-58.3	31.4	-26.9	PASS
2399.575000	-58.5	31.6	-26.9	PASS
2399.675000	-59.1	32.2	-26.9	PASS
2399.925000	-59.3	32.4	-26.9	PASS
2399.975000	-59.5	32.6	-26.9	PASS
2399.875000	-59.5	32.6	-26.9	PASS
2399.525000	-59.9	33.0	-26.9	PASS
2399.725000	-60.6	33.7	-26.9	PASS
2399.825000	-60.8	33.8	-26.9	PASS
2399.475000	-61.0	34.1	-26.9	PASS
2398.925000	-61.2	34.3	-26.9	PASS
2398.875000	-61.2	34.3	-26.9	PASS
2398.825000	-61.8	34.9	-26.9	PASS
2398.975000	-62.0	35.1	-26.9	PASS
2398.275000	-62.3	35.3	-26.9	PASS

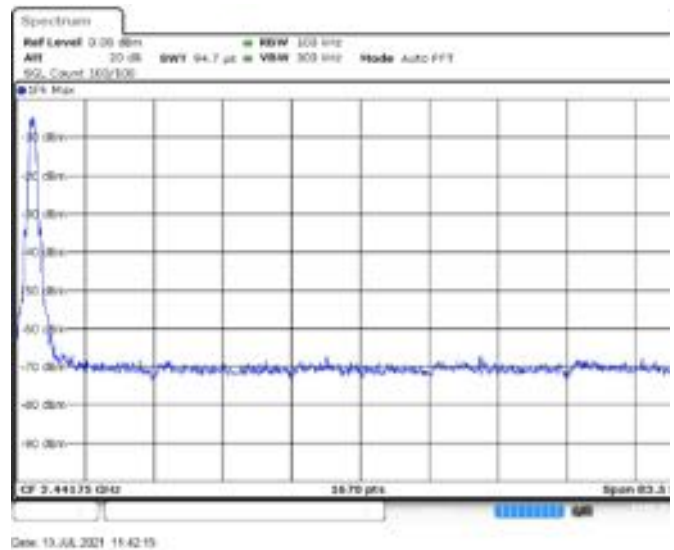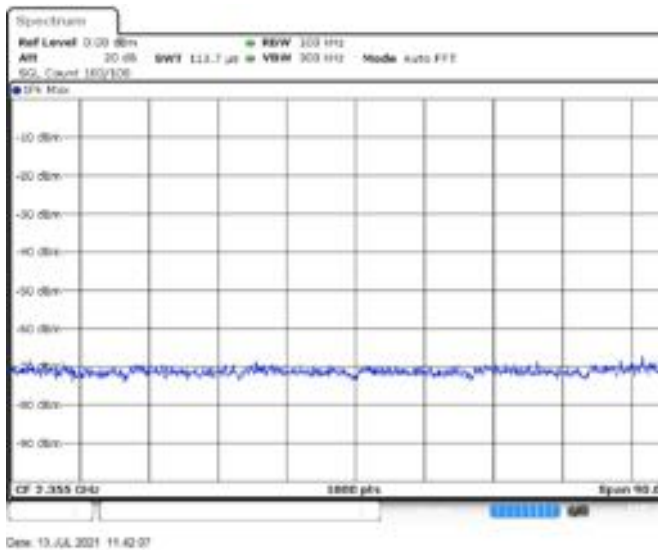

### Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

### Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace




TR no.: 21065785-20824-0

2021-09-10

<b>Stablevalue</b>	<b>0.50 dB</b>	<b>0.50 dB</b>
<b>Run</b>	<b>6 / max. 150</b>	<b>max. 150</b>
<b>Stable</b>	<b>3 / 3</b>	<b>3</b>
<b>Max Stable Difference</b>	<b>0.18 dB</b>	<b>0.50 dB</b>

Plot 17: Mode 1, BEC, high channel

Band Edge

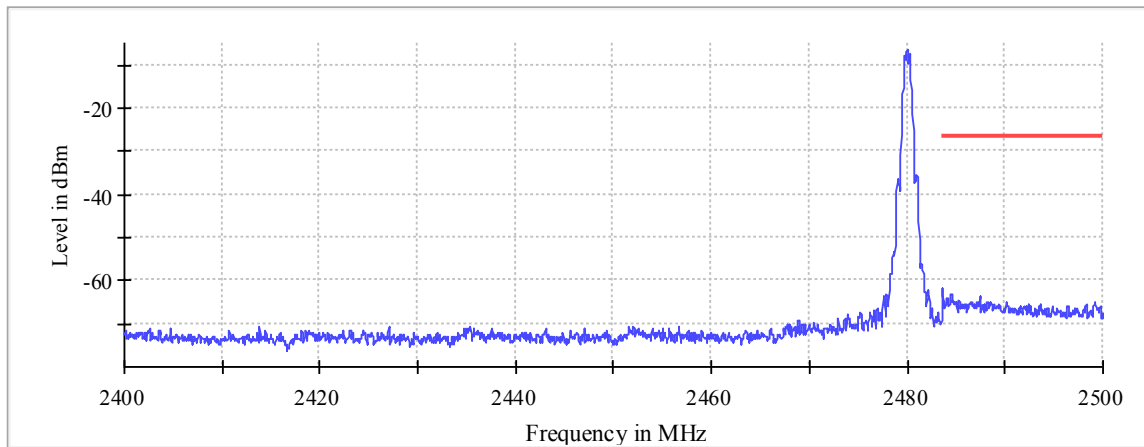

— Limit    — Sum Level    × Fail

### Result


DUT Frequency (MHz)	Result
2480.000000	PASS

### Inband Peak


Frequency (MHz)	Level (dBm)
2480.025000	-6.6

### Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-61.9	35.3	-26.6	PASS
2483.575000	-62.0	35.3	-26.6	PASS
2483.625000	-62.8	36.1	-26.6	PASS
2484.475000	-62.9	36.3	-26.6	PASS
2484.525000	-63.0	36.4	-26.6	PASS
2484.575000	-63.7	37.1	-26.6	PASS
2483.675000	-63.7	37.1	-26.6	PASS
2487.425000	-63.7	37.1	-26.6	PASS
2484.425000	-63.8	37.1	-26.6	PASS
2487.375000	-63.9	37.2	-26.6	PASS
2484.175000	-64.0	37.3	-26.6	PASS
2484.125000	-64.1	37.5	-26.6	PASS
2484.075000	-64.3	37.6	-26.6	PASS
2485.275000	-64.5	37.9	-26.6	PASS
2484.225000	-64.6	38.0	-26.6	PASS

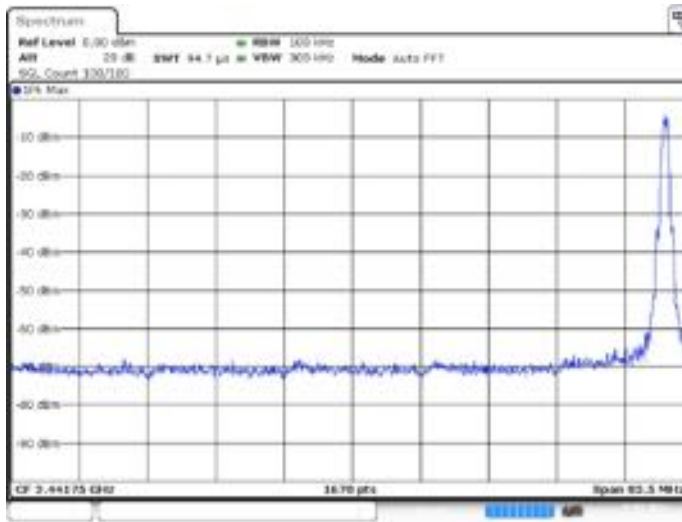

Date: 13.JUL.2021 11:51:18

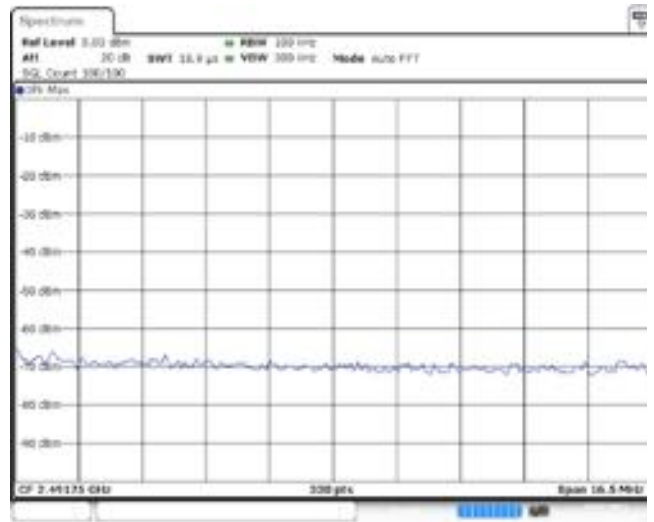

Date: 13.JUL.2021 11:51:18

### Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.50 dB

## Measurement 2



Setting	Instrument Value	Target Value
Start Frequency	2.48350 GHz	2.48350 GHz
Stop Frequency	2.50000 GHz	2.50000 GHz
Span	16.500 MHz	16.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
Sweeptime	18.945 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

<b>7.7 Band Edge Compliance (BEC), radiated</b>			
<b>Applicability</b> This requirement applies to all types of DTS equipment.			
<b>Description</b> Emissions within a restricted band and within 2 MHz of an authorized band edge may be measured using either the marker-delta method (ANSI C63.10, 6.10.6) or the integration method (ANSI C63.20, 11.13.3), provided that the DTS bandwidth (or EBW) edge falls within 2 MHz of the band edge. Otherwise, all unwanted emissions measurements shall be performed using the standard methods.			
<b>Limits</b> §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).			
<b>Test procedure</b> The marker-delta method as described in ANSI C63.10, 6.10.6 or the integration method as described in ANSI C63.10, 11.13.3 can be used to perform measurements of the unwanted emissions level at the band edges.			
<b>Test setup:</b> 8.2 with radiated test sample 61314 (see section 5.2)			
<b>Test results</b>			
BEC	low channel AVG / Peak [dµV/m @3m]	high channel AVG / Peak [dµV/m @3m]	Limit AVG / Peak [dµV/m @3m]
Mode 1	≤ 40 AVG / ≤ 55 PK	≤ 40 AVG / ≤ 55 PK	≤ 54 AVG / ≤ 74 PK


<b>Comment:</b>	---
-----------------	-----

<b>Verdict</b>	<b>- PASS -</b>	see next plots*
----------------	-----------------	-----------------


\* description of traces for radiated Bend Edge Compliance (BEC) measurements:

-  positive Peak (Max Hold) trace
-  average Peak (Max Hold) trace

Plot 18: Mode 1, BEC, low channel

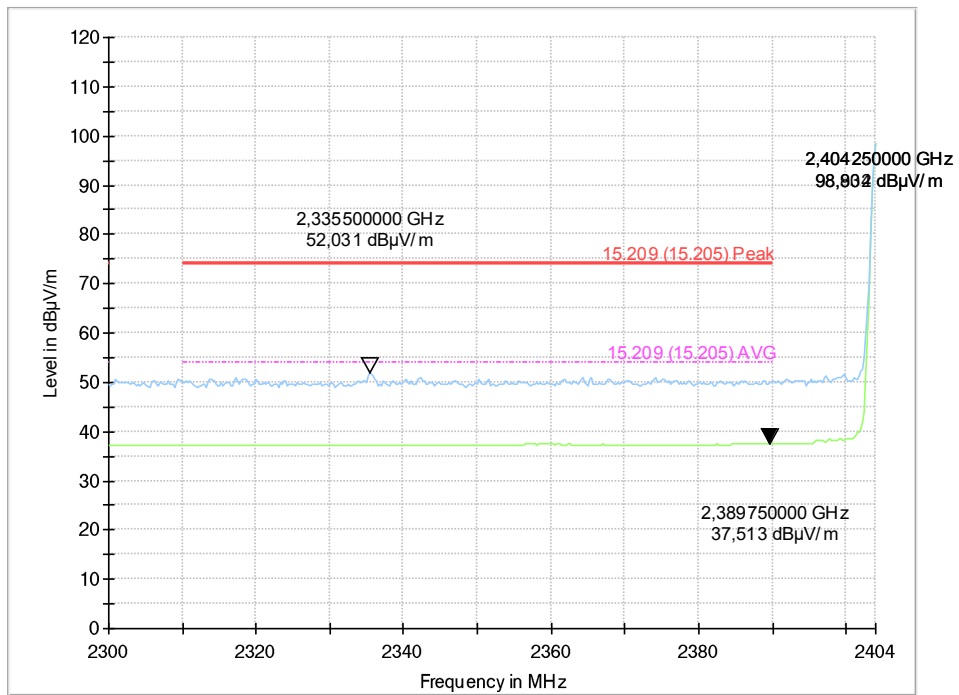

Plot 19: Mode 1, BEC, high channel

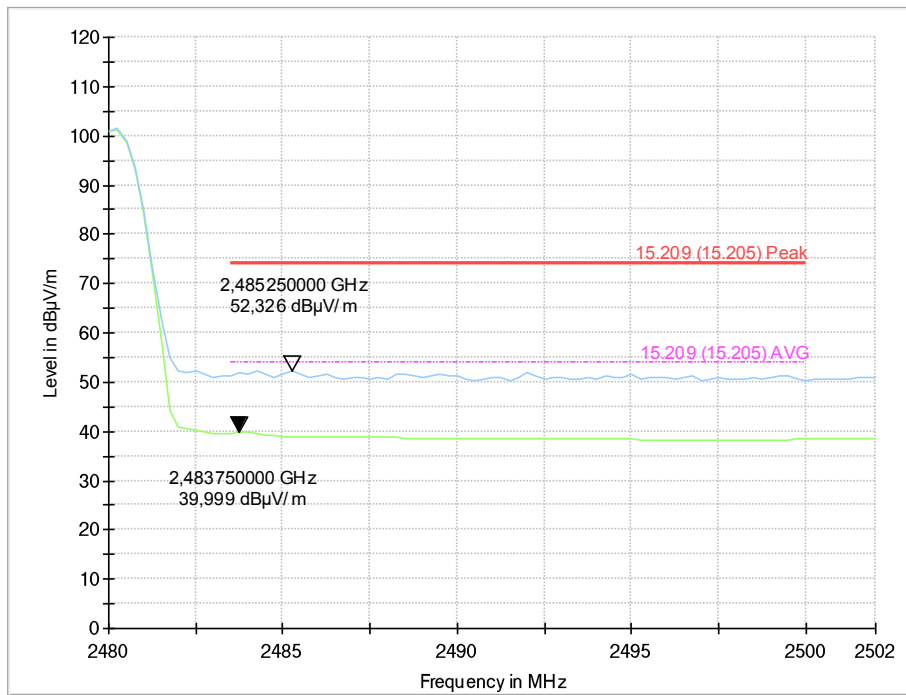

## 7.8 Conducted Spurious Emissions (CSE)

### Applicability

This requirement applies to all types of DTS equipment.

### Description

Spurious emission / unwanted emissions are emission on a frequency or frequencies which are outside the authorized band and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products.

### Limits

§15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in §15.209(a) is not required.

### Test procedure

ANSI C63.10, 11.11

#### *Reference level measurement:*

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to  $\geq 1.5$  times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.
- Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### *Emission level measurement:*

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements as specified ( $\geq 20$  dBc).

The marker-delta method, as described in ANSI C63.10, 6.10.6 can be used to perform measurements of the radiated unwanted emissions level at the band-edges provided that the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.

**Test setup:** 8.4 with conducted test sample 60337 (see section 5.2)

**Test results**

EUT Mode / Channel	Frequency [MHz]	Peak/RMS Detector	Level [dBm]	Limit [dBm]	Verdict
Mode 1 / 37	2402	MaxPeak	see plots*	see plots	- passed -
Mode 1 / 17	2440	MaxPeak	see plots*	see plots	- passed -
Mode 1 / 39	2480	MaxPeak	see plots*	see plots	- passed -

\* all detected peaks are more than 6 dB below the limit


<b>Comment:</b>	---
-----------------	-----

<b>Verdict</b>	<b>- PASS -</b>	see next plots
----------------	-----------------	----------------



Plot 20: Mode 1, CSE, low channel

Spurious

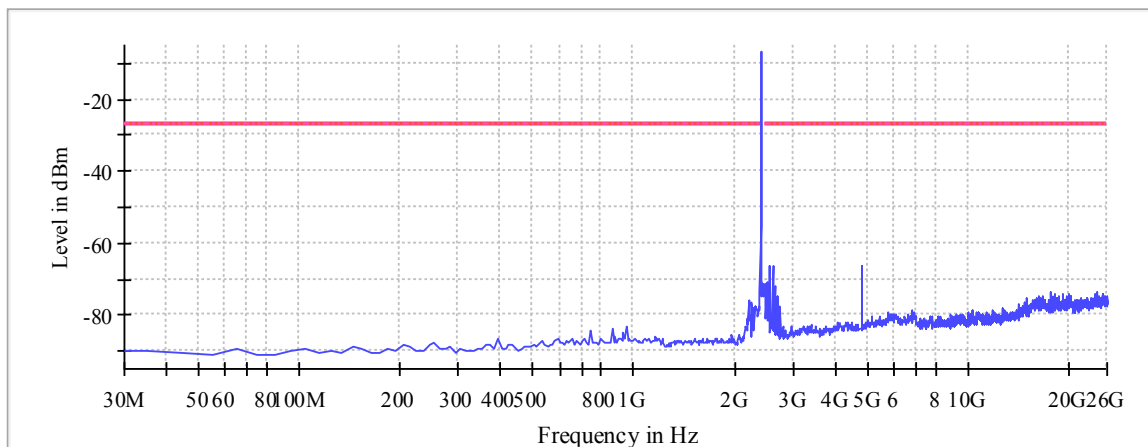

— Limit    — Sum Level    - - - Threshold    × Critical    × Final Critical

## Result

DUT Frequency (MHz)	Result
2402.000000	PASS

## Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

## Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2395.021008	-55.0	28.1	-27.0
2598.434020	-66.1	39.1	-27.0
4807.166065	-66.4	39.4	-27.0
2548.462707	-66.6	39.6	-27.0
2498.491394	-70.6	43.7	-27.0
2638.411071	-71.9	44.9	-27.0
17719.753400	-73.4	46.4	-27.0
24256.001169	-73.7	46.8	-27.0
2385.063025	-73.8	46.8	-27.0
23796.265087	-73.9	47.0	-27.0
18089.541118	-74.0	47.1	-27.0
25345.375797	-74.1	47.2	-27.0
25465.306949	-74.4	47.4	-27.0
19888.508394	-74.4	47.5	-27.0
19148.932958	-74.4	47.5	-27.0

## Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

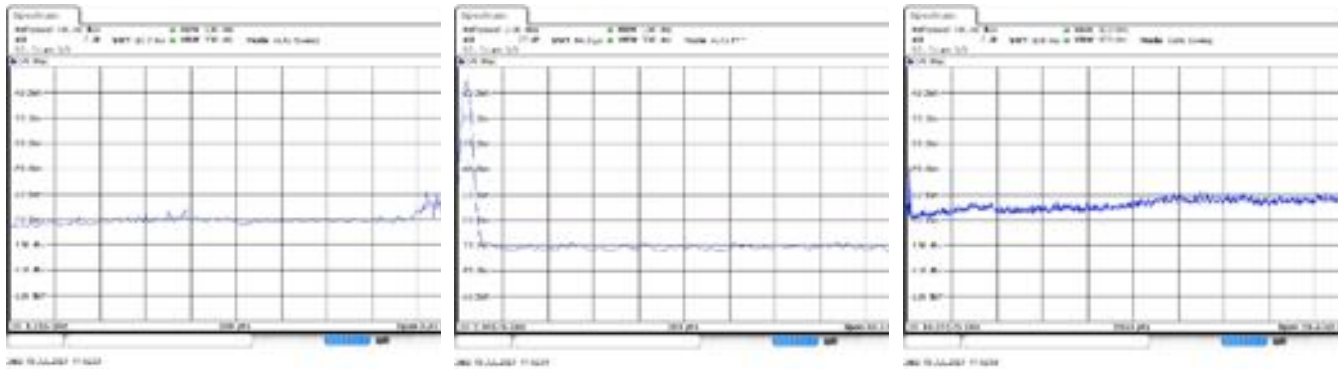


### Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	238	~ 238
Sweeptime	23.700 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Plot 21: Mode 1, CSE, mid channel

Spurious

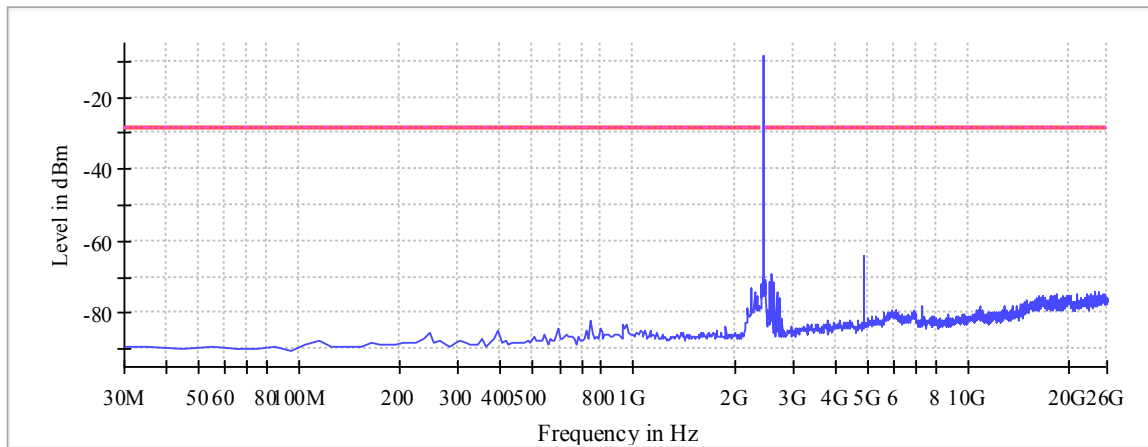

— Limit    — Sum Level    - - - Threshold    × Critical    × Final Critical

### Result

DUT Frequency (MHz)	Result
2440.000000	PASS

### Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

### Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4877.125903	-64.2	35.6	-28.6
2588.439758	-68.9	40.3	-28.6
2538.468445	-71.2	42.6	-28.6
2628.416808	-71.4	42.8	-28.6
2245.651261	-73.2	44.7	-28.6
23776.276562	-74.0	45.5	-28.6
2488.497131	-74.0	45.5	-28.6
2678.388122	-74.2	45.6	-28.6
2295.441176	-74.3	45.8	-28.6
24655.771674	-74.4	45.8	-28.6
23796.265087	-74.5	45.9	-28.6
25305.398746	-74.6	46.0	-28.6
23216.597854	-74.6	46.1	-28.6
18379.374734	-74.7	46.2	-28.6
25745.146303	-74.8	46.2	-28.6

### Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

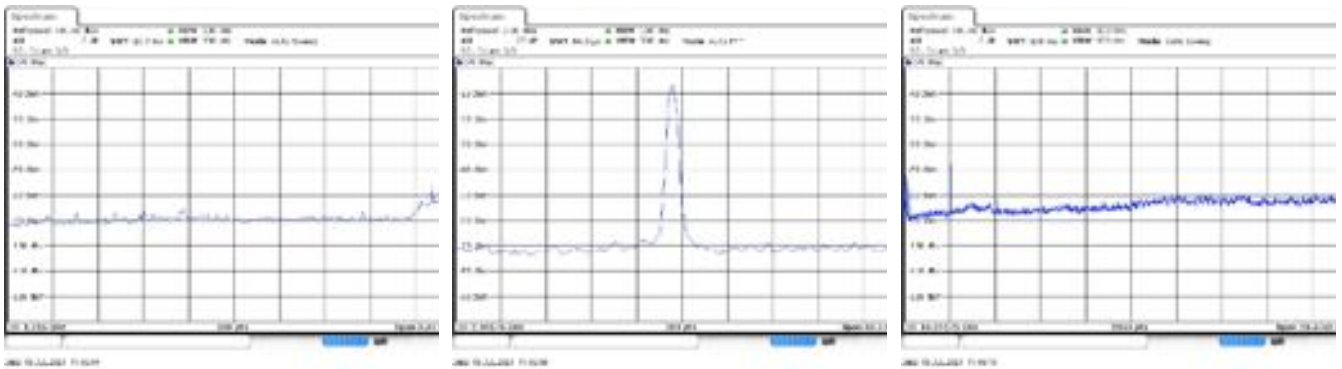


### Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	18 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Plot 22: Mode 1, CSE, high channel

Spurious

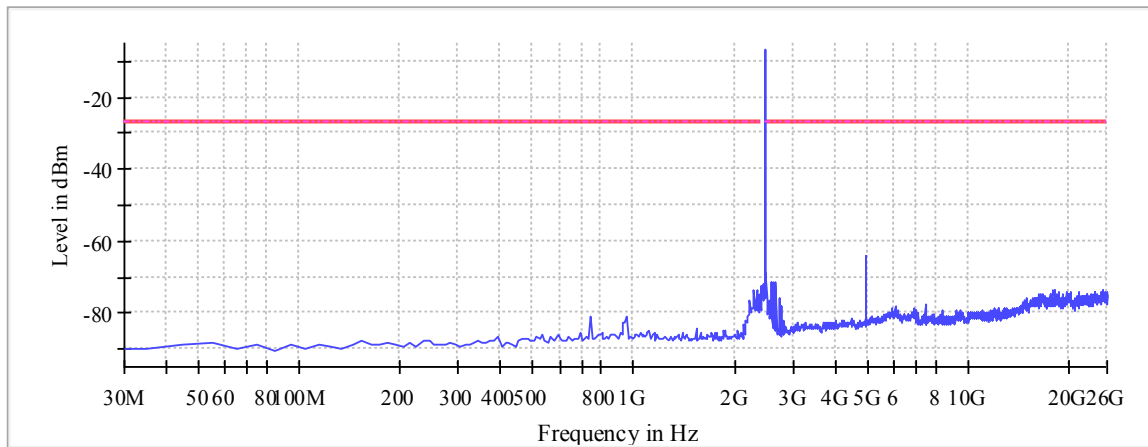

— Limit    — Sum Level    - - - Threshold    × Critical    × Final Critical

### Result

DUT Frequency (MHz)	Result
2480.000000	PASS

### Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

### Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4957.080004	-63.9	37.2	-26.7
2488.497131	-68.8	42.1	-26.7
2668.393859	-71.1	44.5	-26.7
2628.416808	-71.2	44.5	-26.7
2578.445495	-71.5	44.8	-26.7
2335.273109	-73.4	46.7	-26.7
18019.581279	-73.5	46.8	-26.7
2285.483193	-73.5	46.8	-26.7
25345.375797	-73.7	47.0	-26.7
18049.564067	-73.7	47.1	-26.7
25545.261050	-73.9	47.3	-26.7
23846.236400	-74.0	47.3	-26.7
21477.596154	-74.1	47.4	-26.7
18739.168190	-74.2	47.5	-26.7
23796.265087	-74.3	47.6	-26.7

### Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

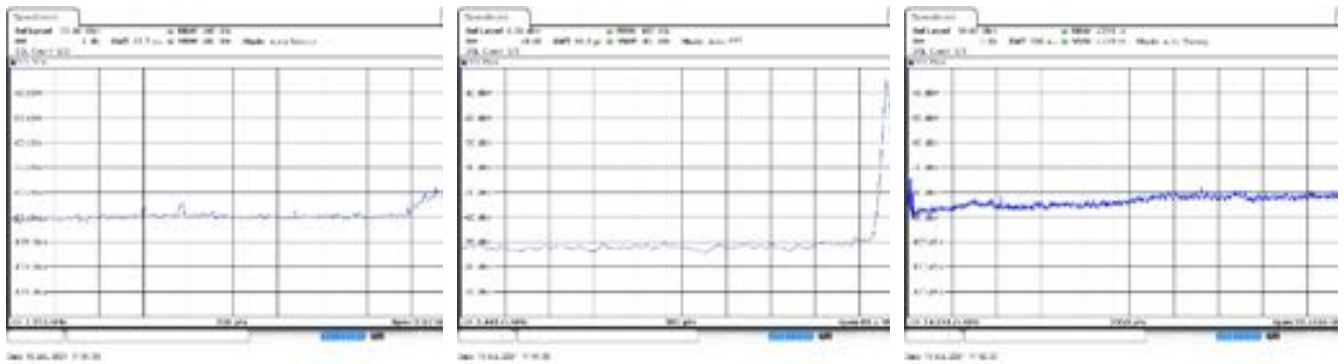

### Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	238	~ 238
Sweeptime	23.700 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

## 7.9 Radiated Spurious Emissions (RSE)

### Applicability

This requirement applies to all types of DTS equipment.

### Description

Spurious emission / unwanted emissions are emission on a frequency or frequencies which are outside the authorized band and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products. Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

### Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency [MHz]	Field Strength [ $\mu\text{V}/\text{m}$ ] / [dB $\mu\text{V}/\text{m}$ ]	Measurement distance [m]
0.009 – 0.490	2400/F[kHz]	300
0.490 – 1.705	24000/F[kHz]	30
1.705 – 30.0	30.0 / 29.5	30
30 – 88	100 / 40.0	3
88 – 216	150 / 43.5	3
216 – 960	200 / 46.0	3
960 – 40 000	500 / 54.0	3

### Note




Radiated Spurious Emissions (RSE) are performed for low / mid / high channel.

**Test setup:** 8.1, 8.2, 8.3 with radiated test sample 61314 (see section 5.2)

Test results					
EUT Mode / Channel	Frequency [MHz]	Peak/RMS Detector	Level** [dBm]	Limit [dBm]	Verdict
Mode 1 / 37	2402	MaxPeak	see plots*	see plots	- passed -
Mode 1 / 39	2480	MaxPeak	see plots*	see plots	- passed -

\* all detected peaks are more than 6 dB below the limit

\*\* description of line and marker for all radiated spurious emission (RSE) measurements:


-  positive Peak (Max Hold) trace during pre-scan
-  Max Peak value
-  final Quasi Peak value

<b>Comment:</b>	---
-----------------	-----


<b>Verdict</b>	<b>- PASS -</b>	see next plots
----------------	-----------------	----------------




Plot 23: Mode 1, RSE, 9 kHz – 30 MHz, low channel (37), 2402 MHz, loop antenna

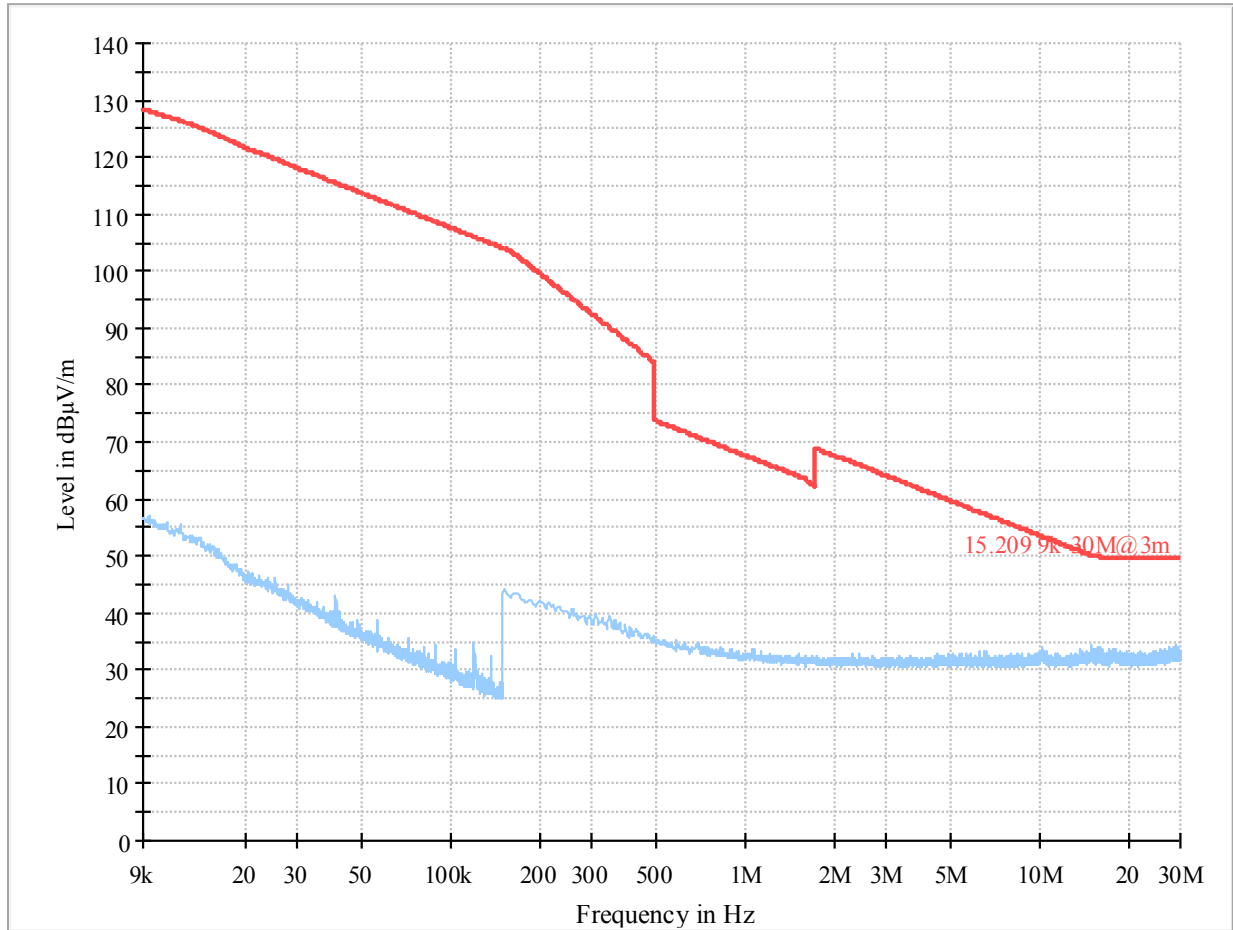

Plot 24: Mode 1, RSE, 9 kHz – 30 MHz, high channel (39), 2480 MHz, loop antenna

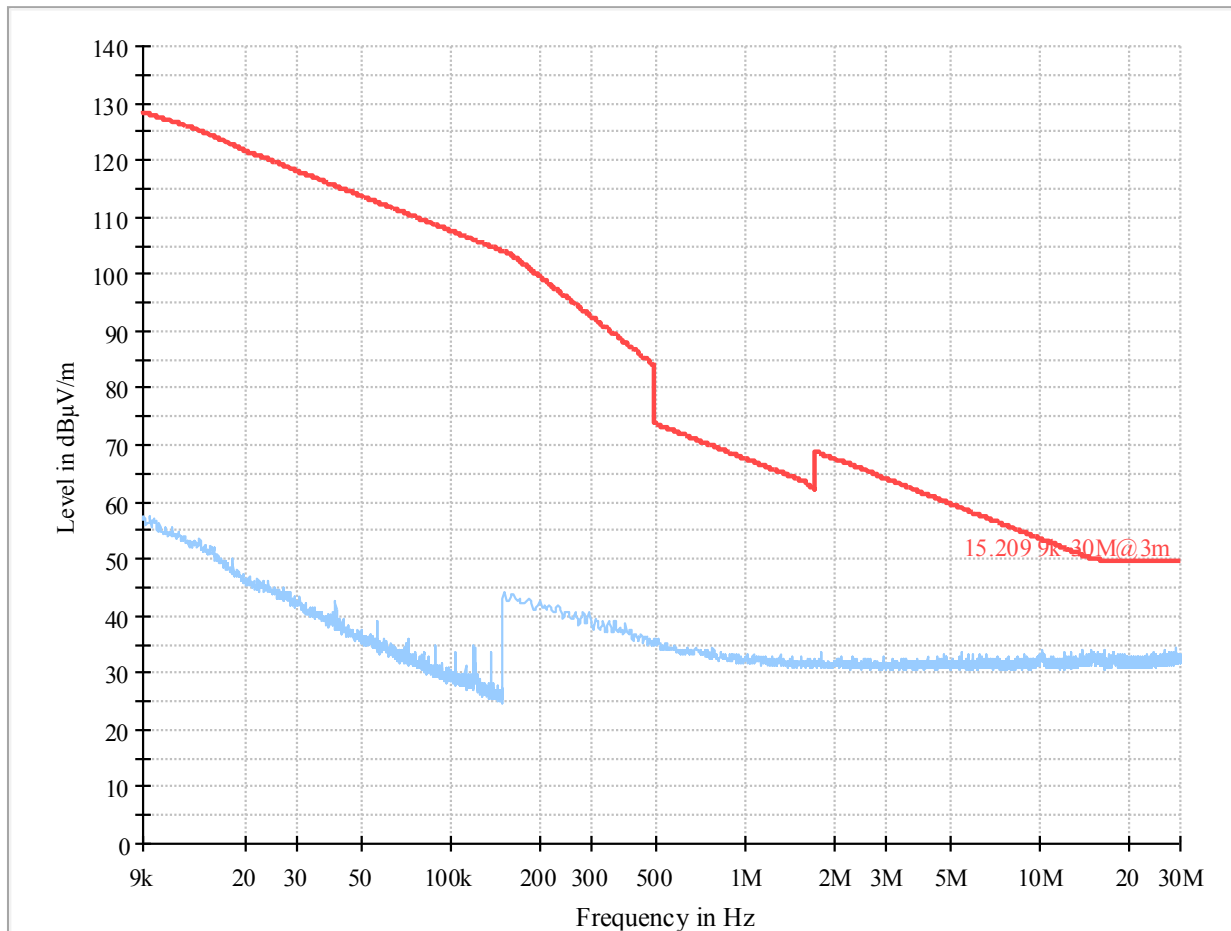

Plot 25: Mode 1, RSE, 30 MHz – 1 GHz, low channel (37), 2402 MHz, horizontal / vertical polarisation

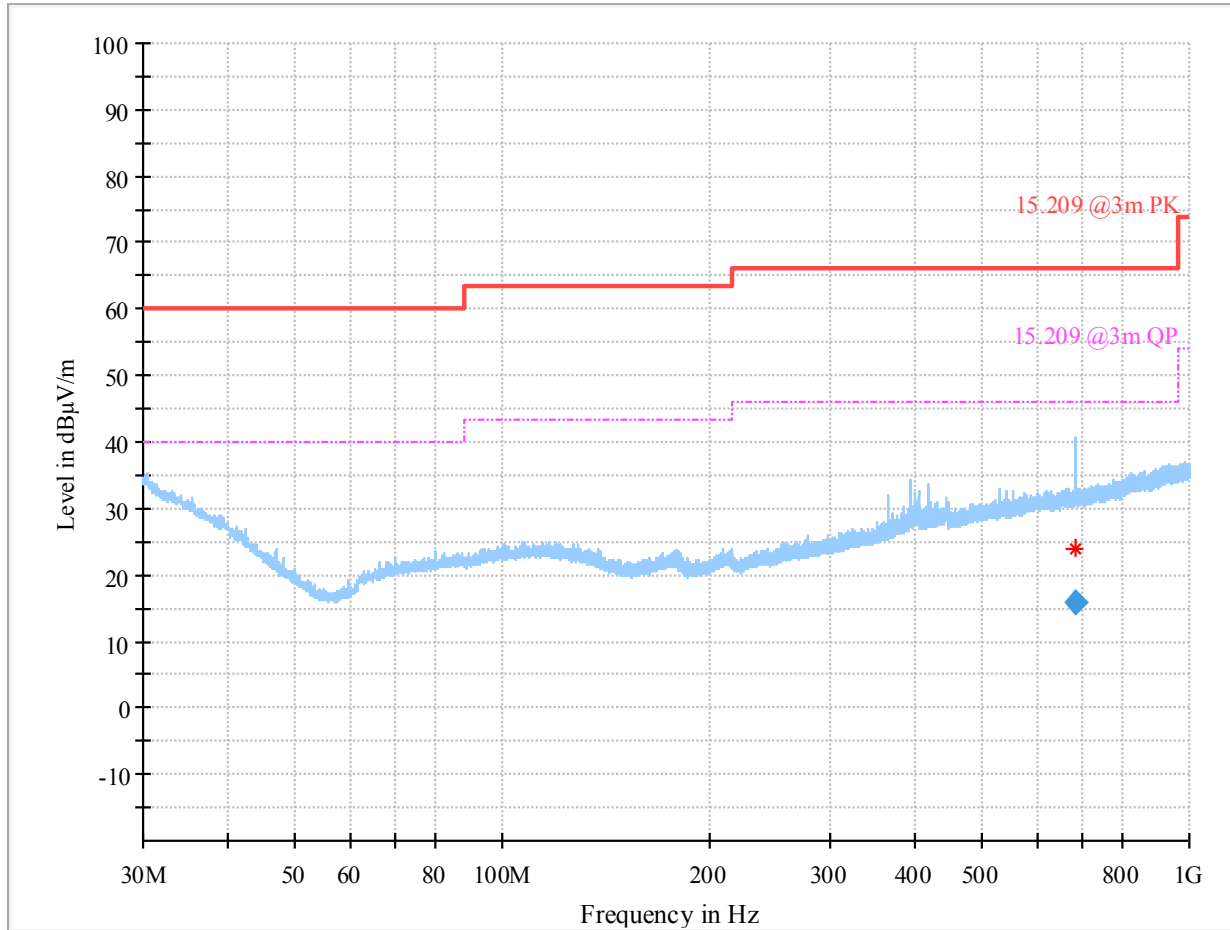


### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
681.875000	15.75	66.00	50.25	100.0	120.000	131.0	V	180.0


(continuation of the "Final\_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
681.875000	20.7	09:19:34 - 31.08.2021


Plot 26: Mode 1, RSE, 30 MHz – 1 GHz, high channel (39), 2480 MHz, horizontal / vertical polarisation

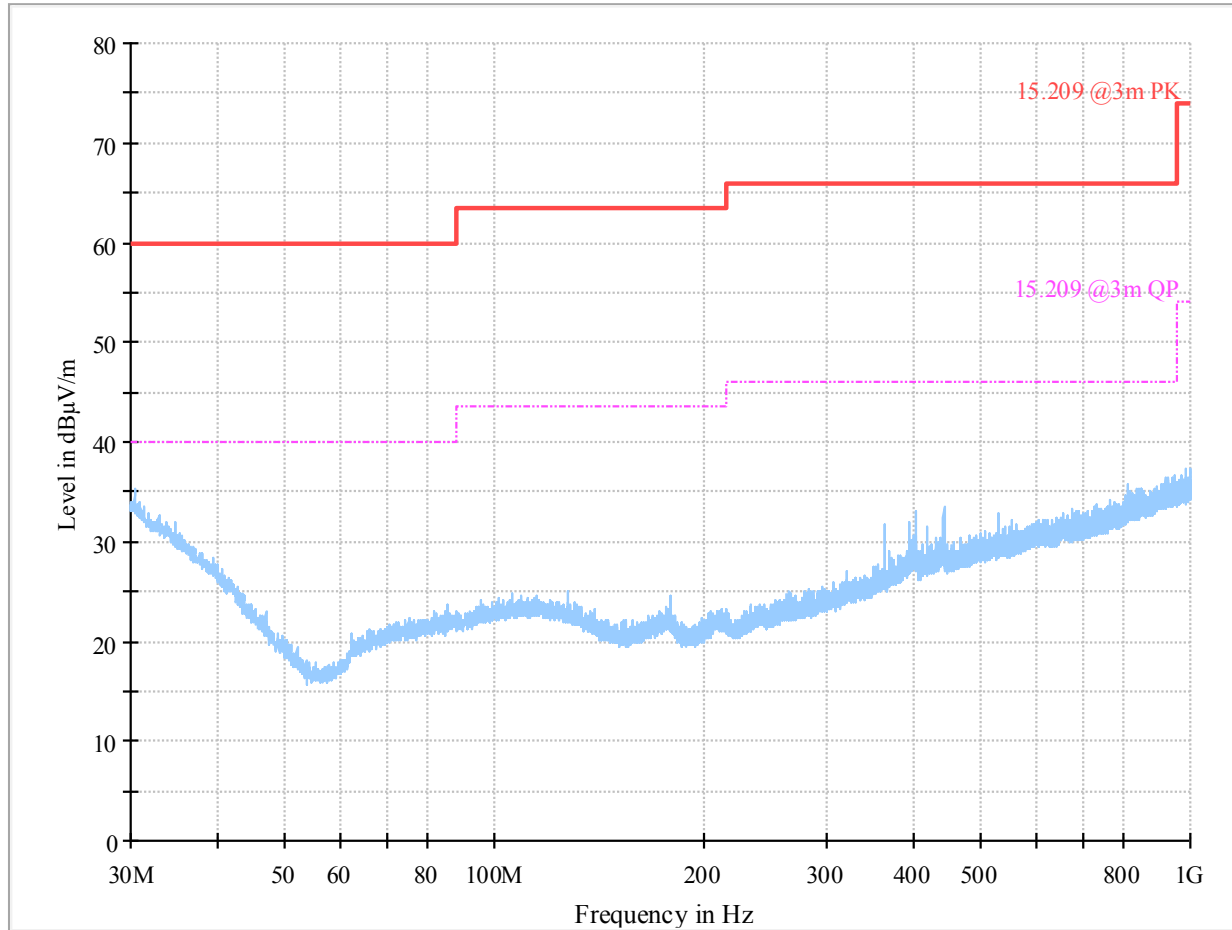


Plot 27: Mode 1, RSE, 1 GHz – 4 GHz, low channel (37), 2402 MHz, horizontal / vertical polarisation

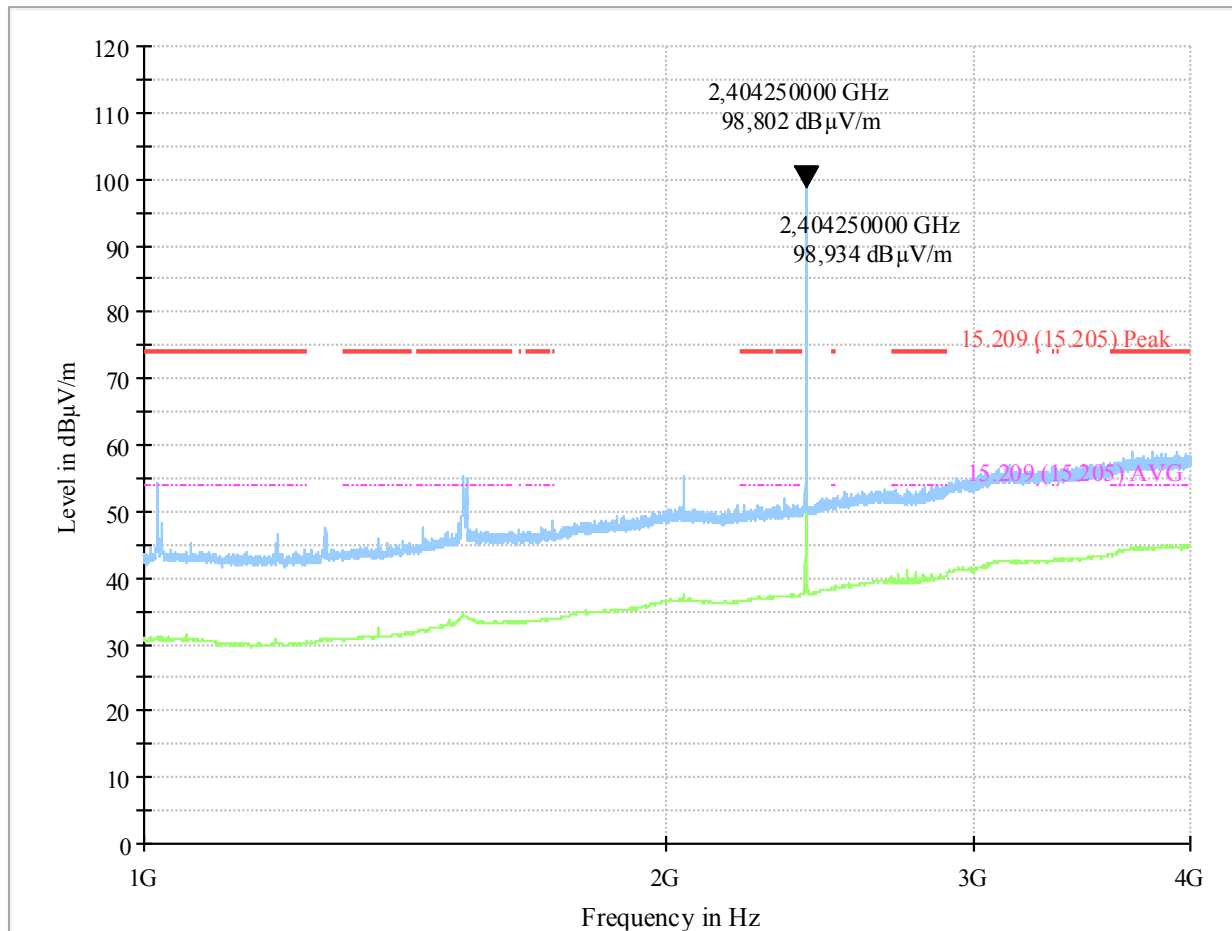

Plot 28: Mode 1, RSE, 1 GHz – 4 GHz, high channel (39), 2480 MHz, horizontal / vertical polarisation

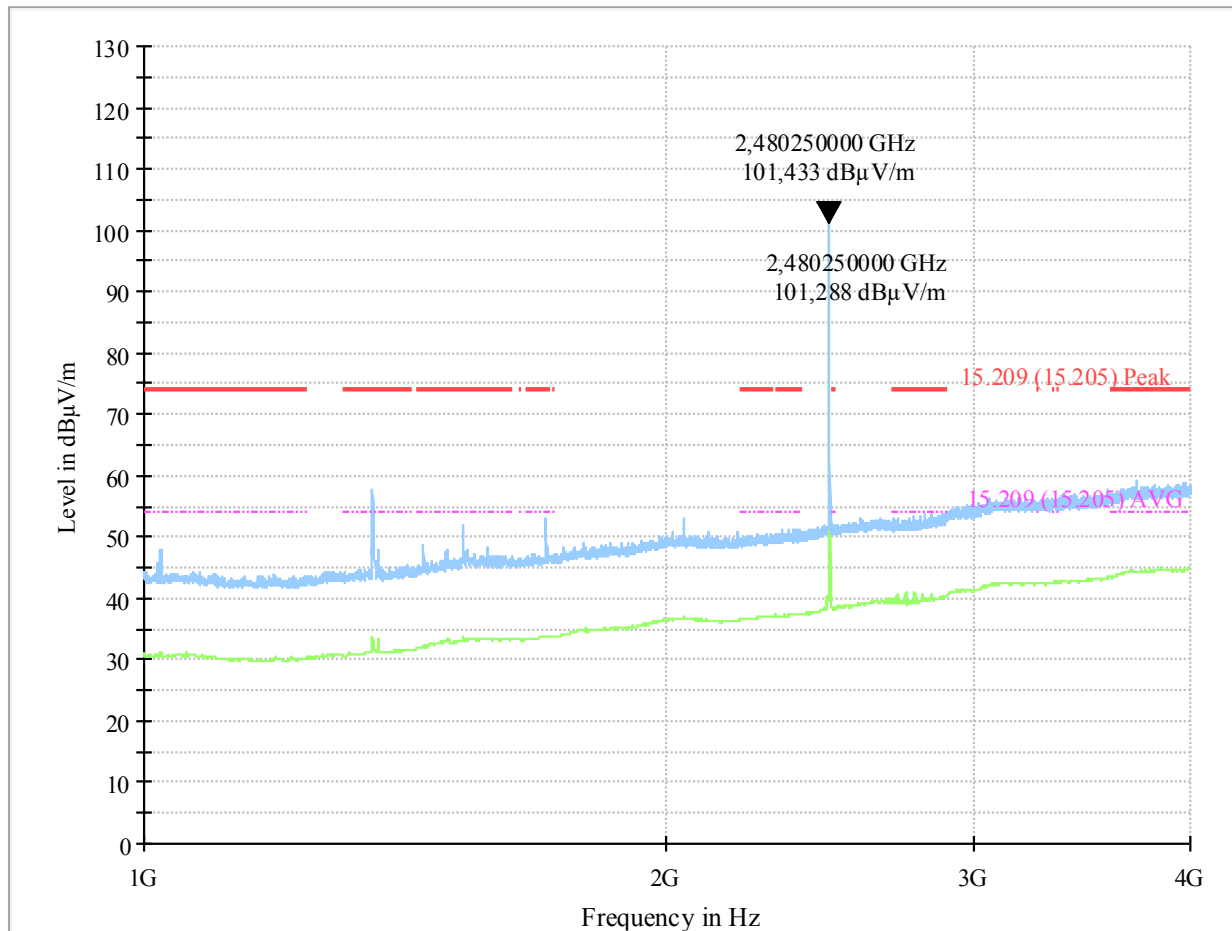

Plot 29: Mode 1, RSE 4 GHz – 18 GHz, low channel (37), 2402 MHz, horizontal / vertical polarisation

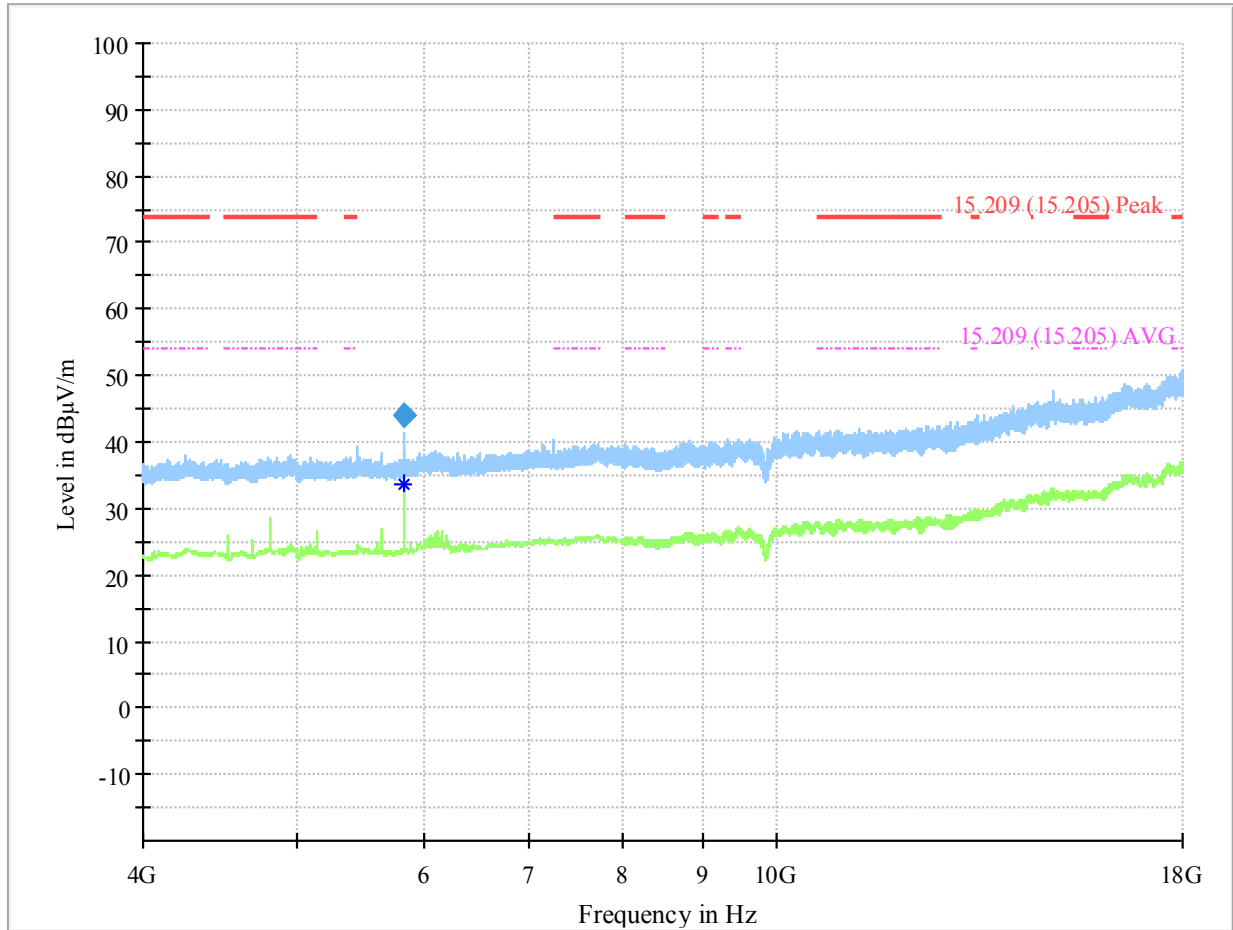


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
5836.825000	44.00	---	---	100.0	1000.000	150.0	H	159.0

(continuation of the "Final\_Result" table from column 15 ...)

Frequency (MHz)	Elevation (deg)	Corr. (dB/m)	Comment
5836.825000	90.0	9.2	11:28:55 - 26.08.2021

Plot 30: Mode 1, RSE 4 GHz – 18 GHz, high channel (39), 2480 MHz, horizontal / vertical polarisation

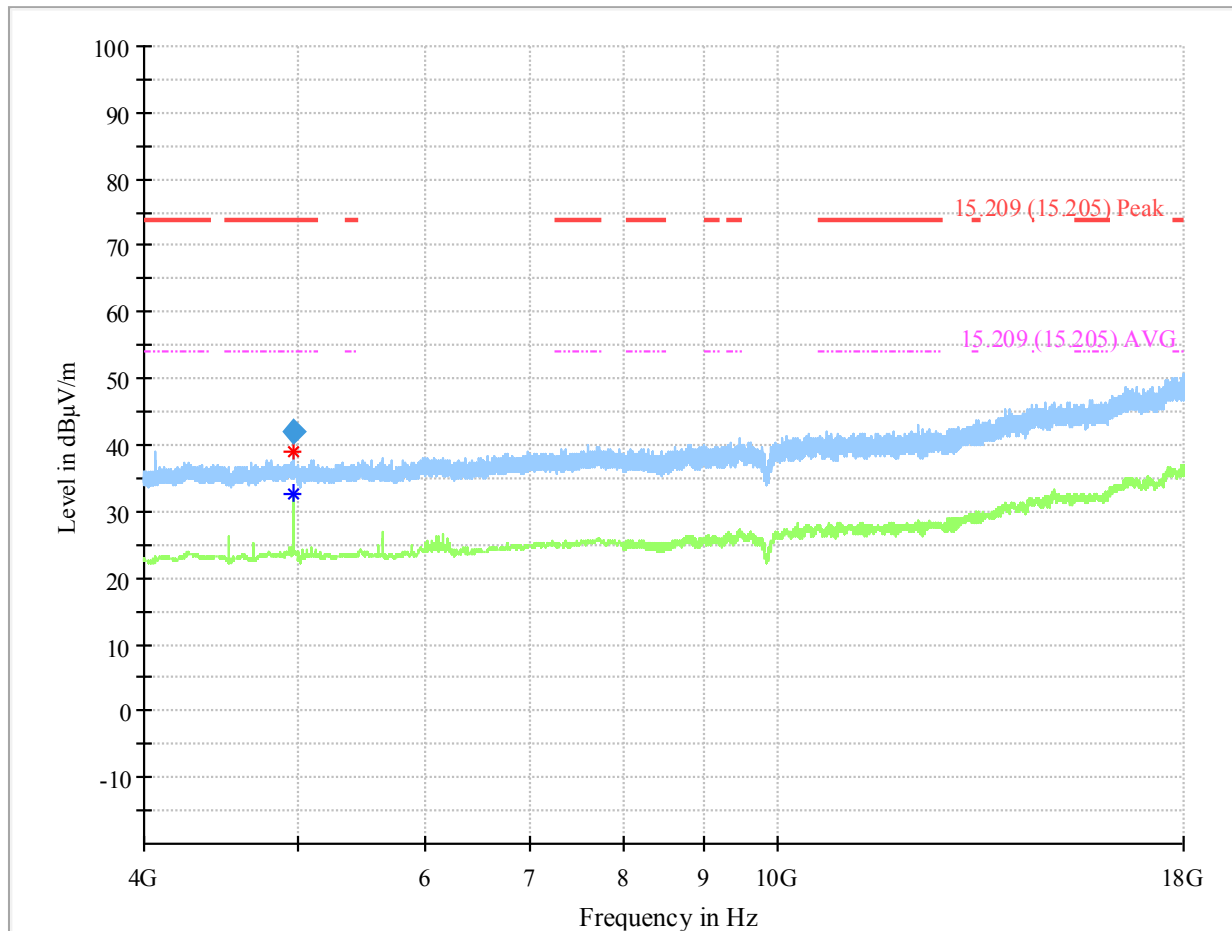

### Final\_Result


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
4960.300000	41.94	74.00	32.06	100.0	1000.000	150.0	V	78.0

(continuation of the "Final\_Result" table from column 15 ...)


Frequency (MHz)	Elevation (deg)	Corr. (dB/m)	Comment
4960.300000	90.0	7.9	13:40:11 - 26.08.2021



Plot 31: Mode 1, RSE, 18 GHz – 25 GHz, low channel (37), 2402 MHz, horizontal / vertical polarisation

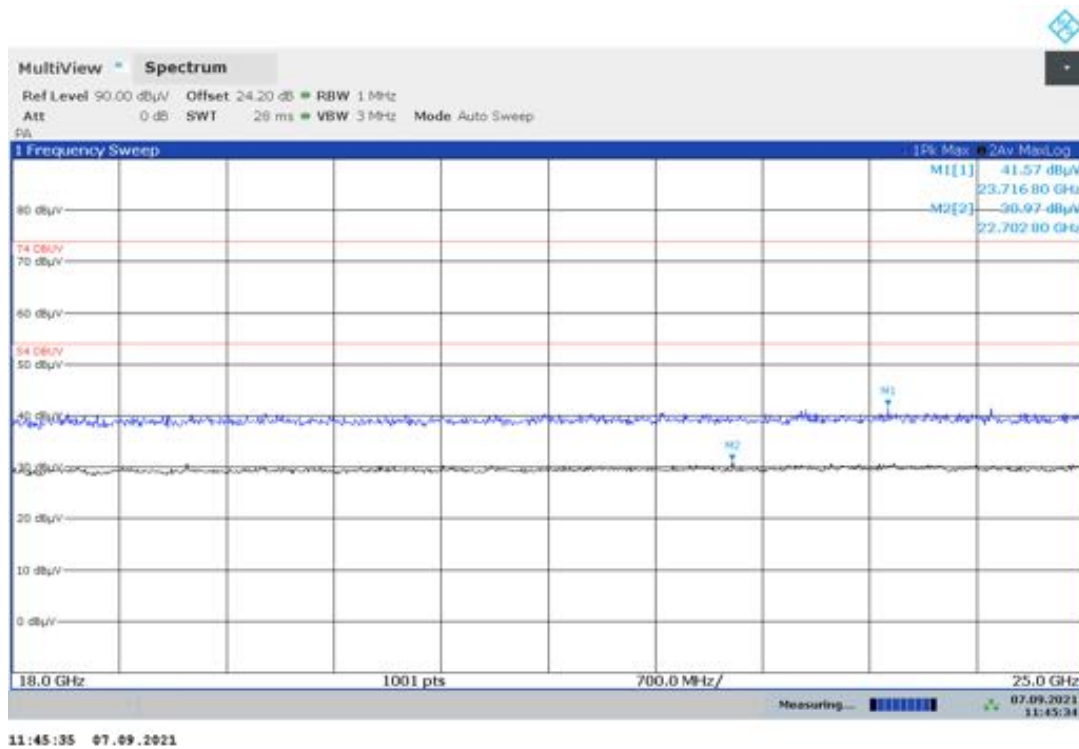


Plot 32: Mode 1, RSE, 18 GHz – 25 GHz, high channel (39), 2480 MHz, horizontal / vertical polarisation

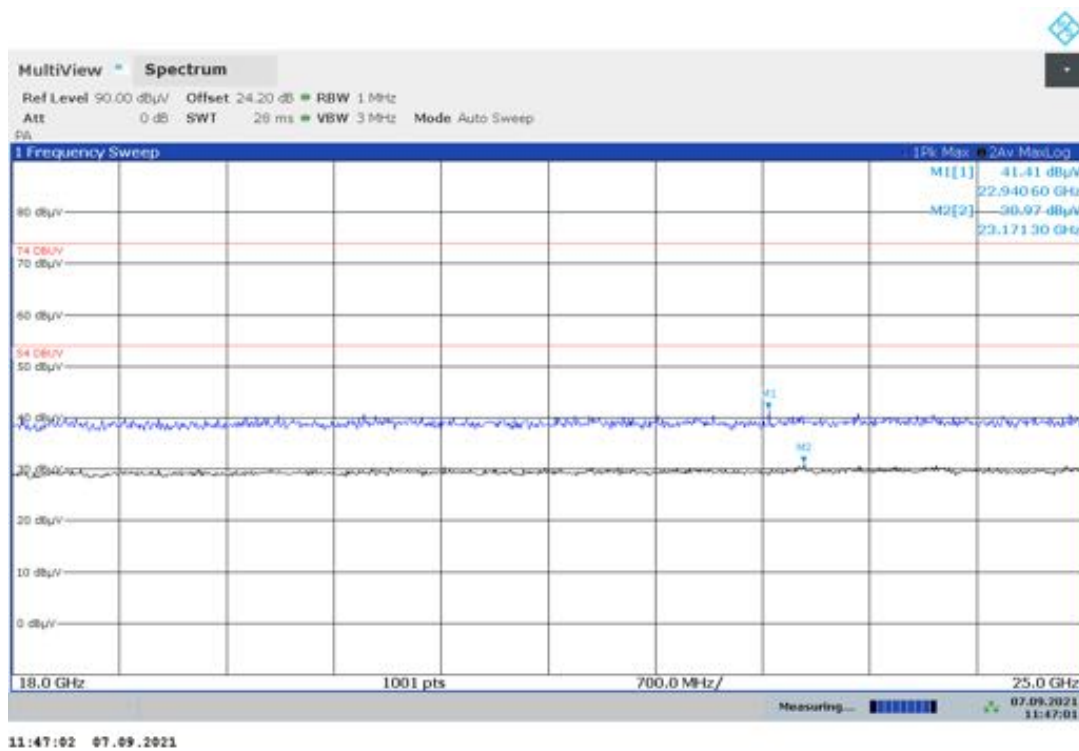

## 8 TEST SETUP DESCRIPTION

### 8.1 Semi Anechoic Chamber with Ground Plane

Radiated measurements are performed in vertical and horizontal plane in the frequency range 30 MHz to 1 GHz in a Semi Anechoic Chamber with a metallic ground plane. The EUT is positioned on a non-conductive test table with a height of 0.80 m above the metallic ground plane that covers the whole chamber. The receiving antennas conform to specification ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices. These antennas can be moved over the height range between 1.0 m and 4.5 m in order to search for maximum field strength emitted from the EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by a spectrum analyzer where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

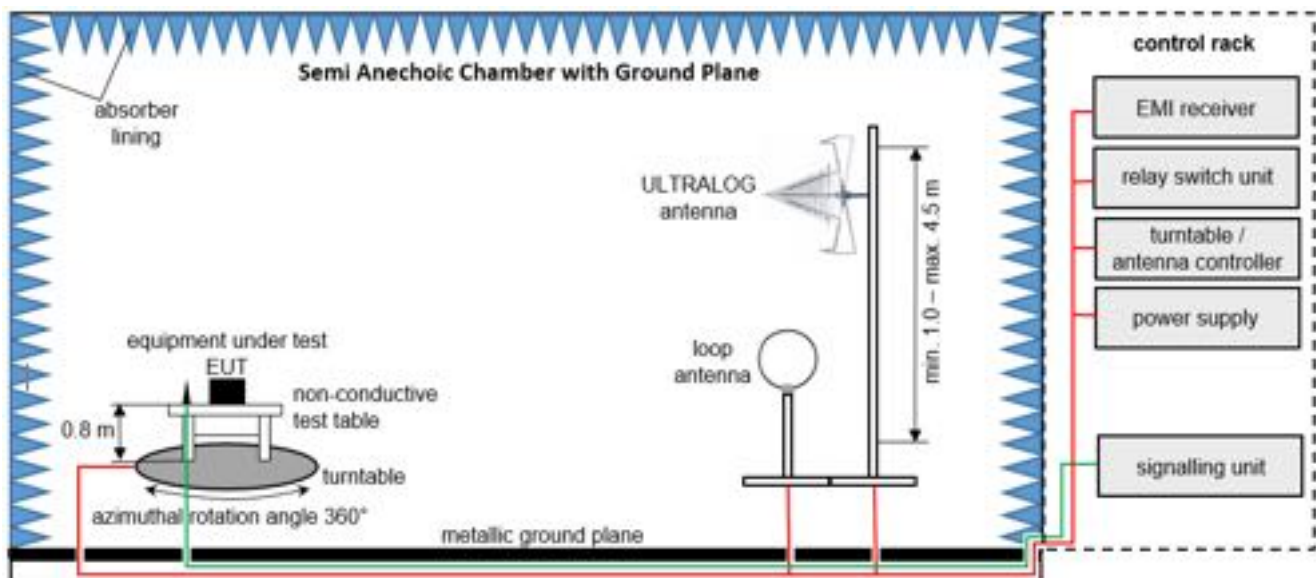

Measurement distance: loop antenna 3 m, ULTRALOG antenna 3 m  
 EMC32 software version: 11.10.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

**List of test equipment used:**

No.	Equipment	Manufacturer	Type	Serial No.	INV. No.	Last / Next Calibration
1	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	–
2	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	–
3	Power Supply	Chroma	61604	616040005416	LAB000285	–
4	Positioner	matur GmbH	TD 1.5-10KG		LAB000258	–
5	Compressed Air	Implotex	1-850-30	-	LAB000256	–
6	EMI Test Receiver	Rohde & Schwarz	ESW26	101517	LAB000363	2021-02-05 → 2022-02-05
7	Semi-Anechoic Chamber (SAC)	Albatross Projects GmbH	SAC 5 (Babylon 5)	20168.PRB	LAB000235	-
8	Measurement Software	Rohde & Schwarz	EMC32 V11.00.10		LAB000226	–
9	Turntable	matur GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	–
10	Antenna Mast	matur GmbH	CAM4.0-P	CAM4.0-P/316	LAB000224	–
11	Antenna Mast	matur GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	–
12	Controller	matur GmbH	FCU 3.0	10082	LAB000222	–
13	Power Supply	Elektro-Automatik GmbH & Co. KG	PS 2042-10 B	2878350292	LAB000191	–
14	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	–
15	Open Switch and Control Platform	Rohde & Schwarz	OSP200 Base Unit 2HU	101748	LAB000149	–
16	Antenna	Rohde & Schwarz	HL562E	102001	LAB000123	2020-07-05 → 2023-07-05
17	Antenna	Rohde & Schwarz	HFH2-Z2E - Active Loop Antenna	100954	LAB000108	2020-03-25 → 2023-03-25

## 8.2 Fully Anechoic Chamber

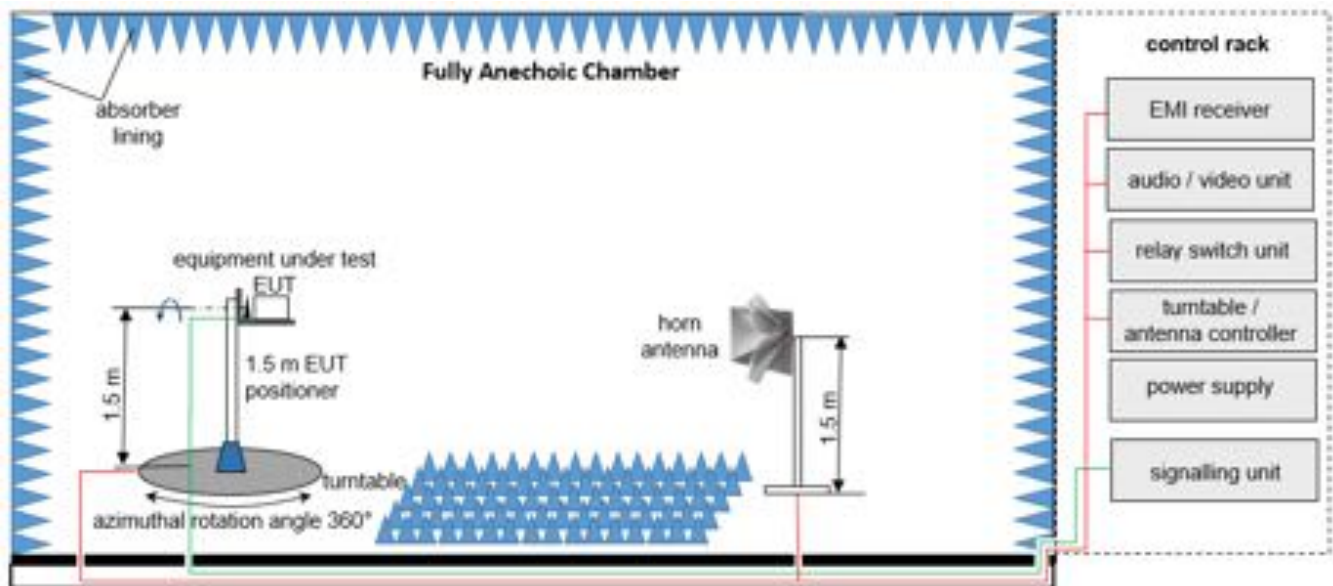

Measurement distance: horn antenna 3 meter

EMC32 software version: 11.10.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

$$OP [dBm] = -65.0 [dBm] + 50 [dB] - 20 [dBi] + 5 [dB] = -30 [dBm] (1 \mu W)$$

**List of test equipment used:**

No.	Equipment	Manufacturer	Type	Serial No.	INV. No.	Last / Next Calibration
1	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	–
2	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	–
3	Power Supply	Chroma	61604	616040005416	LAB000285	–
4	Positioner	matur GmbH	TD 1.5-10KG	–	LAB000258	–
5	Compressed Air	Implotex	1-850-30	-	LAB000256	–
6	EMI Test Receiver	Rohde & Schwarz	ESW26	101517	LAB000363	2021-02-05 → 2022-02-05
7	Semi-Anechoic Chamber (SAC)	Albatross Projects GmbH	SAC 5 (Babylon 5)	20168.PRB	LAB000235	-
8	Measurement Software	Rohde & Schwarz	EMC32 V11.00.10	–	LAB000226	–
9	Turntable	matur GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	–
10	Antenna Mast	matur GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	–
11	Controller	matur GmbH	FCU 3.0	10082	LAB000222	–
12	Power Supply	Elektro-Automatik GmbH & Co. KG	PS 2042-10 B	2878350292	LAB000191	–
13	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	–
14	Open Switch and Control Platform	Rohde & Schwarz	OSP200 Base Unit 2HU	101748	LAB000149	–
15	Antenna	Rohde & Schwarz	HF907	102898	LAB000124	2020-04-23 → 2023-04-23
16	HP-filter	AtlantRF	–	–	LAB000382	–

### 8.3 Radiated measurements > 18 GHz

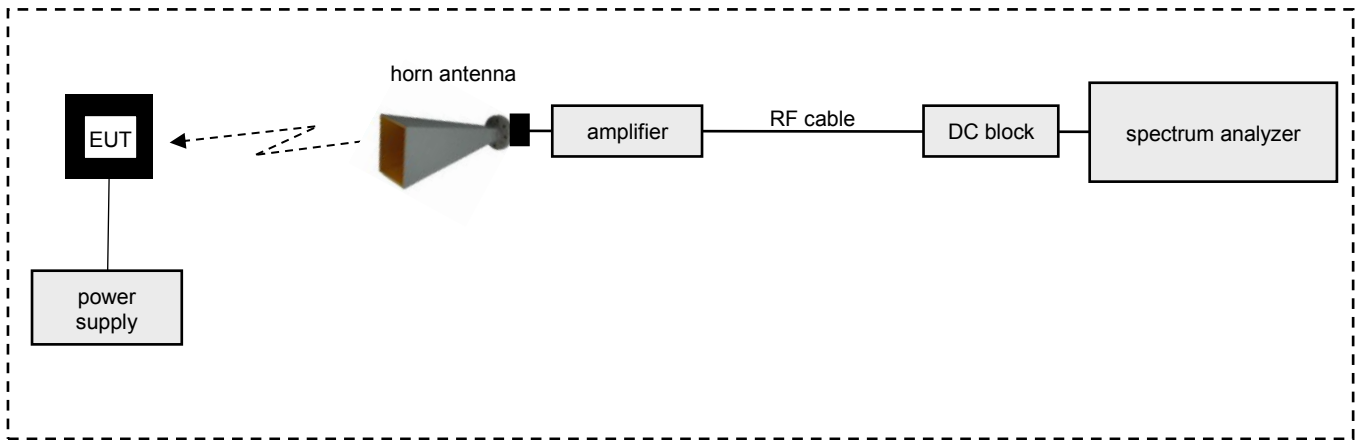


**List of test equipment used:**

No.	Equipment	Manufacturer	Type	Serial No.	INV. No.	Last / Next Calibration
1	Test table	innco systems GmbH	PT0707-RH light	-	LAB000303	-
2	WG-Coax-Adapter	Flann Microwave Ltd	20093-TF30 UBR220	273374	LAB000181	-
3	Coaxial Cable	Huber & Suhner	SF101/1.5m	503987/1	LAB000165	-
4	Antenna	Flann Microwave Ltd	20240-20	266403	LAB000128	2020-06-29 → 2023-06-29
5	Spectrum Analyser	Rohde & Schwarz	FSW43	101391	LAB000289	2021-07-02 → 2022-07-02

### 8.4 Conducted measurements WLAN test system R&S TS 8997

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The losses for all signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

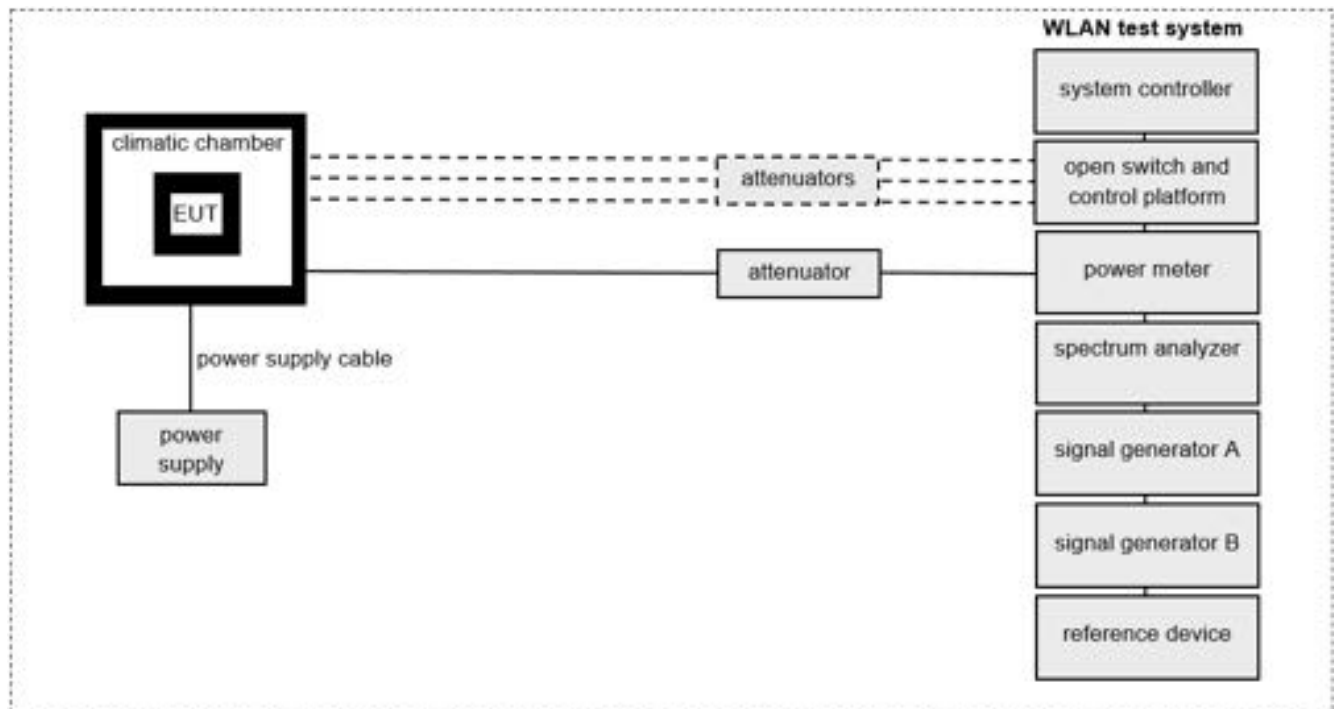

EMC32/WMS32 software version: 11.00.00

#### List of test equipment used:

No.	Equipment	Manufacturer	Type	Serial No.	INV. No.	Last / Next Calibration
1	TS8997-Rack	Rohde & Schwarz	TS8997-Rack	100829	LAB000322	–
2	Open Switch and Control Platform	Rohde & Schwarz	OSP-B157WX	101247	LAB000280	–
3	Open Switch and Control Platform	Rohde & Schwarz	OSP-B157W8	100982	LAB000279	–
4	Spectrum Analyser	Rohde & Schwarz	FSV40	101403	LAB000278	2021-06-15 → 2022-06-15
5	Signal Generator	Rohde & Schwarz	SMBV100A	258240	LAB000277	2021-06-02 → 2022-06-02
6	Signal Generator	Rohde & Schwarz	SMB100A-20	178175	LAB000276	2021-05-27 → 2022-05-27
7	Radio Communication Tester	Rohde & Schwarz	CMW270	101479	LAB000275	–
8	Controller	Hewlett Packard	ATS-Z230	101379	LAB000274	–
9	Power Supply	EA	PS 2042-10 B	2878350263	LAB000190	–

## 9 MEASUREMENT UNCERTAINTIES

Radio frequency	$\leq \pm 1 \times 10^{-7}$
RF power, conducted	$\leq \pm 0.75$ dB
Power spectral density	$\leq \pm 3$ dB
Maximum frequency deviation	$\leq \pm 5$ %
Deviation limitation Duty Cycle, Tx-sequence, Tx-gap	$\leq \pm 5$ %
Occupied channel bandwidth	$\leq \pm 5$ %
Conducted spurious emission of transmitter	$\leq \pm 4$ dB
Conducted emission of receivers	$\leq \pm 4$ dB
Radiated emission of transmitter	$\leq \pm 6$ dB
Radiated emission of receiver	$\leq \pm 6$ dB
Temperature	$\leq \pm 2.5$ °C
Humidity	$\leq \pm 10$ %

The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor  $k = 2$ . It was determined in accordance with EA-4/02 M:2013. The true value is located in the corresponding interval with a probability of 95 %.