

# Partial Test Report

Test report no.: 21086129-23008-1

Date of issue: 2021-12-08

**Test result:** The test item - **passed** - and complies with the listed standards.

## Applicant

Mitsubishi Electric Corporation Sanda Works

## Manufacturer

Mitsubishi Electric Corporation

## Test Item

R1LOW-R-SBM

## RF-Spectrum Testing

according to:

### FCC 47 CFR Part 15

Radio Frequency Devices (Subpart C)


### RSS-247 Issue 2

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

### RSS-Gen Issue 5

General Requirements for Compliance of Radio Apparatus

Tested by *Piotr Sardyko*  
(name, function, signature) *Deputy Head of Laboratory RF*

  
signature

Approved by *Dr.-Ing. Harald Ansorge*  
(name, function, signature) *Managing Director*

  
signature

<b>Applicant and Test item details</b>	
<b>Applicant</b>	Mitsubishi Electric Corporation Sanda Works 2-3-33, Miwa, Sanda-City, Hyogo 669-1513 Japan DESIGN-A SECTION, CAR MULTIMEDIA DESIGN DEPT. Fon: +81 79 559 4813 E-Mail: Yoshinaga.Ryuji@db.MitsubishiElectric.co.jp
<b>Manufacturer</b>	Mitsubishi Electric Corporation 2-3-33, Miwa, Sanda-City, Hyogo 669-1513 Japan DESIGN-A SECTION, CAR MULTIMEDIA DESIGN DEPT. Fon: +81 79 559 4813 E-Mail: Yoshinaga.Ryuji@db.MitsubishiElectric.co.jp
<b>Test item description</b>	Automotive Display Audio
<b>Model/Type reference</b>	R1LOW-R-SBM
<b>Standard specific information</b>	
<b>FCC ID</b>	UJH-R1LOW-R-SBM
<b>IC</b>	662K-R1LOWRSB
<b>PMN</b>	R1LOW-R-SBM
<b>HVIN variant ID#28</b>	28
<b>HVIN variant ID#33</b>	33
<b>HVIN variant ID#39</b>	39
<b>HVIN variant ID#43</b>	43
<b>HVIN variant ID#48</b>	48
<b>FVIN</b>	N/A
<b>HMN</b>	N/A
<b>Frequency</b>	2.4 GHz ISM band (2400 – 2483.5 MHz)
<b>Technology</b>	Bluetooth Basic Data Rate (BDR), Enhanced Data Rate (EDR)
<b>Antenna</b>	external PCB antenna
<b>Power supply</b>	9 – 16.5 V DC Battery
<b>Temperature range</b>	-40 °C to +75 °C

### Disclaimer and Notes

The content of this test report relates to the mentioned test sample(s) only.  
Without a written permit of IBL-Lab GmbH, this test report shall not be reproduced, except in full.

The last valid version is available at TAMSys®.

Copyright ©: All rights reserved by IBL-Lab GmbH

Within this test report, a  point /  comma is used as a decimal separator.  
If otherwise, a detailed note is added adjoined to its use.

IBL-Lab GmbH does not take test samples. The sample used for testing is provided by the applicant.

Decision rule: Binary Statement for Simple Acceptance Rule according ILAC-G8:09/2019

# 1 TABLE OF CONTENTS

1	TABLE OF CONTENTS .....	3
2	GENERAL INFORMATION .....	4
2.1	Administrative details .....	4
2.2	Possible test case verdicts .....	4
2.3	Observations .....	5
2.4	Opinions and Interpretations .....	5
2.5	Revision History .....	5
2.6	Further documents .....	5
3	ENVIRONMENTAL & TEST CONDITIONS .....	6
3.1	Environmental conditions .....	6
3.2	Normal and extreme test conditions .....	6
4	TEST STANDARDS AND REFERENCES .....	6
5	EQUIPMENT UNDER TEST (EUT) .....	7
5.1	Product Description .....	7
5.2	Test Item Description .....	7
5.3	Technical Data of Equipment .....	8
5.4	Additional Information .....	9
5.5	Test modes .....	10
6	SUMMARY OF TEST RESULTS .....	11
7	TEST RESULTS .....	12
7.1	RF Output Power (Conducted Peak Power) .....	12
7.2	Antenna Gain (calculated) .....	13
7.3	Band Edge Compliance (BEC), radiated .....	14
7.4	Radiated Spurious Emissions (RSE) .....	16
8	TEST SETUP DESCRIPTION .....	18
8.1	Semi Anechoic Chamber with Ground Plane .....	18
8.2	Fully Anechoic Chamber .....	20
8.3	Radiated measurements > 18 GHz .....	22
8.4	Conducted measurements WLAN test system R&S TS 8997 .....	23
9	MEASUREMENT UNCERTAINTIES .....	24

## 2 GENERAL INFORMATION

### 2.1 Administrative details

Testing laboratory	<b>IBL-Lab GmbH</b> Heinrich-Hertz-Allee 7 66386 Sankt Ingbert / Germany Fon: +49 6894 38938-0 Fax: +49 6894 38938-99 URL: <a href="http://www.ib-lenhardt.de">www.ib-lenhardt.de</a> E-Mail: <a href="mailto:info@ib-lenhardt.de">info@ib-lenhardt.de</a>
Accreditation	The testing laboratory is accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) in compliance with DIN EN ISO/IEC 17025:2018. Scope of testing and registration number: <ul style="list-style-type: none"> <li>• Electronics <a href="#">D-PL-21375-01-01</a></li> <li>• Electromagnetic Compatibility <a href="#">D-PL-21375-01-02</a></li> <li>• Electromagnetic Compatibility and Telecommunication (FCC requirements) <a href="#">D-PL-21375-01-03</a></li> <li>• Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards <a href="#">D-PL-21375-01-04</a></li> <li>• ISED Company Number 27156</li> <li>• Testing Laboratory CAB Identifier DE0020</li> <li>• Telekommunikation (TK) <a href="#">D-PL-21375-01-05</a></li> </ul> Website DAkKS: <a href="https://www.dakks.de/">https://www.dakks.de/</a>  The Deutsche Akkreditierungsstelle GmbH (DAkKS) is also a signatory to <a href="#">ILAC Mutual Recognition Arrangement</a>
Testing location	<b>IBL-Lab GmbH</b> Heinrich-Hertz-Allee 7 66386 St. Ingbert / Germany
Date of receipt of test samples	2021-09-30
Start – End of tests	2021-10-04 – 2021-11-18

### 2.2 Possible test case verdicts

Test sample meets the requirements	P (PASS)
Test sample does not meet the requirements	F (FAIL)
Test case does not apply to the test sample	N/A (Not applicable)
Test case not performed	N/P (Not performed)

## 2.3 Observations

No additional observations other than the reported observations within this test report have been made.

## 2.4 Opinions and Interpretations

No appropriate opinions or interpretations according ISO/IEC 17025:2017 clause 7.8.7 are within this test report.

## 2.5 Revision History

### -0 Initial Version

**-1 Revision:** administrative modification/correction

Change of HVIN

**This test report 21086129-23008-1 replaces the previous test report 21086129-23008-0.**

**Utilisation, publication and control of previous report editions is under responsibility of the applicant.**

## 2.6 Further documents

List of further applicable documents belonging to the present test report:

- TR-21086129-23008-1 (test report).pdf (latest available version)
- TR-21086129-23008-1\_AnnexA (test results EUT).pdf
- TR-21086129-23008-1\_AnnexB (external photos EUT).pdf
- TR-21086129-23008-1\_AnnexC (internal photos EUT).pdf
- TR-21086129-23008-1\_AnnexD (test setup FCC - IC).pdf

### 3 ENVIRONMENTAL & TEST CONDITIONS

#### 3.1 Environmental conditions

Temperature	20°C ± 5°C
Relative humidity	25-75 % r.H.
Barometric Pressure	860-1060 mbar
Power supply	230 V / 50 Hz

#### 3.2 Normal and extreme test conditions

	minimum	nominal	maximum
Temperature	-/-	+25 °C	-/-
Relative humidity	-/-	50 % r.h.	-/-
Power supply	-/-	12.6 V DC	-/-

### 4 TEST STANDARDS AND REFERENCES

Test standard (accredited)	Description
<b>FCC 47 CFR Part 15</b>	Radio Frequency Devices (Subpart C)
<b>RSS-247 Issue 2</b>	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
<b>RSS-Gen Issue 5</b>	General Requirements for Compliance of Radio Apparatus

Test standard (not accredited)	Description
none	---

Reference	Description
<b>ANSI C63.4-2014</b>	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI C63.10-2013</b>	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
<b>558074 D01 15.247 Meas Guide v05r02</b>	Guidance for compliance measurements on digital transmission systems, frequency hopping spread spectrum systems and hybrid system devices operating under section 15.247 of the FCC rules

## 5 EQUIPMENT UNDER TEST (EUT)

### 5.1 Product Description

Automotive Display Audio

\*: as declared by applicant

### 5.2 Test Item Description

<b>Model name*</b>	R1LOW-R-SBM
<b>EUT status*</b>	PrePV
<b>Model variants*</b>	ID#28: mechanical variant SBX, electrical variant 30 (lead model) ID#33: mechanical variant SBX, electrical variant 31 ID#39: mechanical variant SBX, electrical variant 60 ID#43: mechanical variant SBX, electrical variant 40 ID#48: mechanical variant SBX, electrical variant 41
<b>Serial number of EUT test samples*</b>	ID#28: radiated EUT: 65108 conducted EUT: 65112 ID#33: radiated EUT: 66605 conducted EUT: - ID#39: radiated EUT: 65334 conducted EUT: 65332 ID#43: radiated EUT: 66704 conducted EUT: - ID#48: radiated EUT: 66804, 66805 conducted EUT: -
<b>PCB identifier*</b>	NJ00193612
<b>Hardware status*</b>	NR-0C-R-PrePV
<b>Software status*</b>	Android 10

\*: as declared by applicant; please see TR-21086129-23008-1\_AnnexB , TR-21086129-23008-1\_AnnexC for EUT photographs.

### 5.3 Technical Data of Equipment

<b>Operational frequency band*</b>	2.4 GHz ISM band (2400 – 2483.5 MHz)
<b>Transmitter*</b>	Chip QCA6574AU with 48 MHz TCXO (Module UGKZ5A3006A)
<b>Technology*</b>	Bluetooth Basic Data Rate (BDR), Enhanced Data Rate (EDR)
<b>Modulation type*</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>Data rate*</b>	1 Mbps, 2 Mbps, 3 Mbps
<b>Number of channels*</b>	79
<b>Channel bandwidth*</b>	1 MHz
<b>Channel spacing*</b>	1 MHz
<b>Rated RF Output Power*</b>	< 2.5 mW (+4 dBm); Power Class: Class2
<b>Antenna R1LOW-R-SBM model*</b> Part name Antenna 0	external PCB antenna P68306857AA/00534042660 #0
<b>Antenna gain R1LOW-R-SBM model *</b>	Antenna 0: 1.85 dBi
<b>Antenna R1LOW-R model*</b> Part name Antenna 0	Sheet metal antenna, 2342059-2
<b>Antenna gain R1LOW-R model*</b>	Antenna 0: -3.55 dBi
<b>Power supply*</b>	9 – 16.5 V DC Battery
<b>Temperature range*</b>	-40 °C to +75 °C

\*: as declared by applicant



<b>5.4 Additional Information</b>	
<b>Model variant differences*</b>	<ul style="list-style-type: none"> <li>• R1LOW-R-SBM DV model with external antenna and disassociated display, PCB ID NJ00193611</li> <li>• R1LOW-R-SBM PrePV model with external antenna and disassociated display, PCB ID NJ00193612</li> </ul> <p><b>Applicant declares that transmitter module with chip and external antenna are identical in R1LOW-R-SBM DV model (see IBL-Lab test report TR-21086129-23008-1) and R1LOW-R-SBM PrePV model.</b></p> <p><b>Electrical variants of R1LOW-R-SBM PrePV model listed in section 5.2 refer to different memory chipsets and multimedia chipsets and interfaces.</b></p> <p>Test results of R1LOW-R-SBM DV model are used for following test cases (see IBL-Lab test report TR-21086129-23008-1):</p> <ul style="list-style-type: none"> <li>• Carrier frequency separation</li> <li>• Number of frequency hopping channels</li> <li>• Time of channel occupancy</li> <li>• Minimum emission bandwidth 6dB, emission bandwidth 20 dB</li> <li>• Occupied Channel Bandwidth (99%)</li> <li>• Band edge compliance (BEC), conducted</li> <li>• Conducted spurious emissions (CSE)</li> </ul> <p>Conducted R1LOW-R-SBM PrePV test samples of model variants #28, #39 are used for following test cases:</p> <ul style="list-style-type: none"> <li>• RF output power (conducted peak power)</li> </ul> <p>Radiated R1LOW-R-SBM PrePV test samples of model variants #28, #39 are used for following test cases:</p> <ul style="list-style-type: none"> <li>• Antenna gain (calculated)</li> </ul> <p>Radiated R1LOW-R-SBM PrePV test samples of all model variants are used for following test cases:</p> <ul style="list-style-type: none"> <li>• Band edge compliance (BEC), radiated</li> <li>• Radiated spurious emissions (RSE) – worst case from R1LOW-R-SBM DV tests (see IBL-Lab test report TR-21086129-23008-1)</li> </ul>
<b>Ancillaries tested with</b>	None
<b>Additional equipment used for testing</b>	Notebook with test tool

\*: as declared by applicant

## 5.5 Test modes

<b>Mode 1</b>	GFSK, 1 Mbps
<b>Mode 2</b>	π/4-DQPSK, 2 Mbps
<b>Mode 3</b>	8DPSK, 3 Mbps
<b>Low Channel</b>	2402 MHz
<b>Mid Channel</b>	2441 MHz
<b>High Channel</b>	2480 MHz

## 6 SUMMARY OF TEST RESULTS

### Test specification

FCC 47 CFR Part 15  
RSS-247 Issue 2 / RSS-Gen Issue 5

Clause	Requirement / Test Case	Result - Remark	Verdict
15.247(a)(1) RSS-247, 5.1 (b)	Carrier frequency separation	KDB 558074, clause: 9	- N/P - *
15.247(a)(1)(iii), (g) RSS-247, 5.1 (d)	Number of frequency hopping channels	KDB 558074, clause: 9	- N/P - *
15.247(a)(1)(iii) RSS-247, 5.1 (d)	Time of channel occupancy	KDB 558074, clause: 9	- N/P - *
§15.247(a)(1) RSS-247, 5.1 (a)	Minimum emission bandwidth 6dB, emission bandwidth 20 dB	KDB 558074, clause: 2.2	- N/P - *
RSS Gen, 6.7	Occupied channel bandwidth (99%)	-/-	- N/P - *
§15.247(b)(1) RSS-247, 5.4 (b)	RF output power (conducted peak power)	KDB 558074, clause: 9	- PASS -
§15.247(b)(4) RSS-247, 5.4 (b)	Antenna gain (calculated)	-/-	- PASS -
§15.247(d) RSS-247, 5.5	Band edge compliance (BEC), conducted	KDB 558074, clause: 9	- N/P - *
§15.247(d) RSS-247, 5.5	Band edge compliance (BEC), radiated	KDB 558074, clause: 9	- PASS -
§15.247(d) RSS-247, 5.5	Conducted spurious emissions (CSE)	KDB 558074, clause: 9	- N/P - *
15.247(d) / §15.209 RSS-247, 5.5 / RSS-Gen, 8.9	Radiated spurious emissions (RSE)	-/-	- PASS -
§15.207 RSS-Gen, 8.8	AC conducted emissions	EUT is battery powered	- N/A -

\*) see IBL-Lab test report TR-21086129-23008-1

### Comments and observations

Following pages show requirements and references of FCC Part 15.247, ANSI C63.10 and KDB 558074 only. Same tests are also applicable and valid for RSS-247, with clauses given in table above.

## 7 TEST RESULTS

### 7.1 RF Output Power (Conducted Peak Power)

**Applicability**

This requirement applies to all types of FHS equipment operating in the 2400 – 2483.5 MHz band.

**Description**

The RF Output Power is defined as the conducted peak output power.

**Limit**

§15.247

(1) For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test procedure**

ANSI C63.10, 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Gate triggering can be implemented in such a way that the sweep of the instrument is only active during the burst period of the device. Any Gate triggering shall be performed on the full power portion of the pulses and care must be taken to ensure that static portions of the pulse are not included in the measurement (ensuring that the trace is averaged over the entire symbol range). All Gate triggered measurements shall be accompanied by a Gate setup plot in the test report.

**Test setup:** 8.4 with conducted test sample (see section 5.2); test setup photographs see TR-21086129-23008-1\_AnnexD

**Test Results**

EUT ID, Test Mode	RF Output Power (Conducted Peak Power)			Limit [dBm]
	low channel [dBm]	mid channel [dBm]	high channel [dBm]	
EUT ID#28, Mode 1	-3.6	-2.8	-2.7	≤ 21
EUT ID#39, Mode 1	-3.9	-3.1	-3.5	≤ 21
EUT ID#28, Mode 2	-4.2	-3.4	-3.2	≤ 21
EUT ID#39, Mode 2	-4.5	-3.7	-4.1	≤ 21
EUT ID#28, Mode 3	-4.1	-3.4	-3.3	≤ 21
EUT ID#39, Mode 3	-4.5	-3.7	-4.1	≤ 21

**Comment:**

---

<b>Verdict</b>	<b>- PASS -</b>	plots see TR-21086129-23008-1_AnnexA
----------------	-----------------	--------------------------------------

<b>7.2 Antenna Gain (calculated)</b>
<b>Applicability</b> This requirement applies to all types of FHS equipment operating in the 2400 – 2483.5 MHz band.
<b>Description</b> The antenna gain is defined as the difference between radiated peak power (Peak EIRP) subtracted by the conducted peak power of the module, given in dBi.
<b>Limit</b> §15.247 (b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.
<b>Test setup:</b> 8.2 with radiated test sample (see section 5.2), 8.4 with conducted test sample (see section 5.2); test setup photographs see TR-21086129-23008-1_AnnexD

**Test Results**

EUT ID #28, Mode 1	low channel	high channel	Limit
Radiated peak power [dBm]	0.0	1.8	≤ 36
Conducted peak power [dBm]	-3.6	-2.7	≤ 30
Calculated antenna gain [dBi]	3.6	4.5	≤ 6

EUT ID #39, Mode 1	low channel	high channel	Limit
Radiated peak power [dBm]	0.4	2.0	≤ 36
Conducted peak power [dBm]	-3.9	-3.5	≤ 30
Calculated antenna gain [dBi]	4.3	5.5	≤ 6

<b>Comment:</b>	---
-----------------	-----

<b>Verdict</b>	<b>- PASS -</b>	plots see TR-21086129-23008-1_AnnexA *
----------------	-----------------	--

\* Used Testing Software EMC32 automatically defines a power offset value so that measured value in dBµV correspond to dBm

<b>7.3 Band Edge Compliance (BEC), radiated</b>
<b>Applicability</b> This requirement applies to all types of FHS equipment operating in the 2400 – 2483.5 MHz band.
<b>Description</b> Emissions within a restricted band and within 2 MHz of an authorized band edge may be measured using either the marker-delta method (ANSI C63.10, 6.10.6) or the integration method (ANSI C63.20, 11.13.3), provided that the DTS bandwidth (or EBW) edge falls within 2 MHz of the band edge. Otherwise, all unwanted emissions measurements shall be performed using the standard methods.
<b>Limits</b> §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
<b>Test procedure</b> The marker-delta method as described in ANSI C63.10, 6.10.6 or the integration method as described in ANSI C63.10, 11.13.3 can be used to perform measurements of the unwanted emissions level at the band edges.
<b>Test setup:</b> 8.2 with radiated test sample (see section 5.2); test setup photographs see TR-21086129-23008-1_AnnexD

Test results			
BEC	low channel AVG / Peak [dµV/m @3m]	high channel AVG / Peak [dµV/m @3m]	Limit AVG / Peak [dµV/m @3m]
EUT ID#28	≤ 45 AVG / ≤ 50 PK	≤ 45 AVG / ≤ 50 PK	≤ 54 AVG / ≤ 74 PK
EUT ID#33	≤ 45 AVG / ≤ 50 PK	≤ 45 AVG / ≤ 50 PK	≤ 54 AVG / ≤ 74 PK
EUT ID#39	≤ 45 AVG / ≤ 50 PK	≤ 45 AVG / ≤ 50 PK	≤ 54 AVG / ≤ 74 PK
EUT ID#43	≤ 45 AVG / ≤ 50 PK	≤ 45 AVG / ≤ 50 PK	≤ 54 AVG / ≤ 74 PK
EUT ID#48	≤ 45 AVG / ≤ 50 PK	≤ 45 AVG / ≤ 50 PK	≤ 54 AVG / ≤ 74 PK

<b>Comment:</b>	---
-----------------	-----

<b>Verdict</b>	<b>- PASS -</b>	TR-21086129-23008-1_AnnexA
----------------	-----------------	----------------------------

## 7.4 Radiated Spurious Emissions (RSE)

### Applicability

This requirement applies to all types of DTS and FHS equipment.

### Description

Spurious emission / unwanted emissions are emission on a frequency or frequencies which are outside the authorized band and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products. Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

### Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency [MHz]	Field Strength [ $\mu\text{V}/\text{m}$ ] / [dB $\mu\text{V}/\text{m}$ ]	Measurement distance [m]
0.009 – 0.490	2400/F[kHz]	300
0.490 – 1.705	24000/F[kHz]	30
1.705 – 30.0	30.0 / 29.5	30
30 – 88	100 / 40.0	3
88 – 216	150 / 43.5	3
216 – 960	200 / 46.0	3
960 – 40 000	500 / 54.0	3

**Note:** Radiated Spurious Emissions (RSE) are performed for mode 2 low / mid / high channel.

**Test setup:** 8.1, 8.2 with radiated test sample (see section 5.2); test setup photographs see TR-21086129-23008-1\_AnnexD






Test results					
EUT ID / Channel	Frequency [MHz]	Peak/RMS Detector	Level [dBm]	Limit [dBm]	Verdict
EUT ID#28, 0	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#28, 78	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#33, 0	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#33, 78	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#39, 0	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#39, 78	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#43, 0	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#43, 78	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#48, 0	see plots	MaxPeak	see plots	see plots	- PASS -
EUT ID#48, 78	see plots	MaxPeak	see plots	see plots	- PASS -

<b>Comment:</b>	---
-----------------	-----

<b>Verdict</b>	<b>- PASS -</b>	plots see TR-21086129-23008-1_AnnexA *
----------------	-----------------	--


\* description of line and marker for all radiated spurious emission (RSE) measurements:

-  positive Peak (Max Hold) trace during pre-scan
-  Max Peak value
-  final Quasi Peak value

## 8 TEST SETUP DESCRIPTION

### 8.1 Semi Anechoic Chamber with Ground Plane

Radiated measurements are performed in vertical and horizontal plane in the frequency range 30 MHz to 1 GHz in a Semi Anechoic Chamber with a metallic ground plane. The EUT is positioned on a non-conductive test table with a height of 0.80 m above the metallic ground plane that covers the whole chamber. The receiving antennas conform to specification ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices. These antennas can be moved over the height range between 1.0 m and 4.5 m in order to search for maximum field strength emitted from the EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by a spectrum analyzer where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

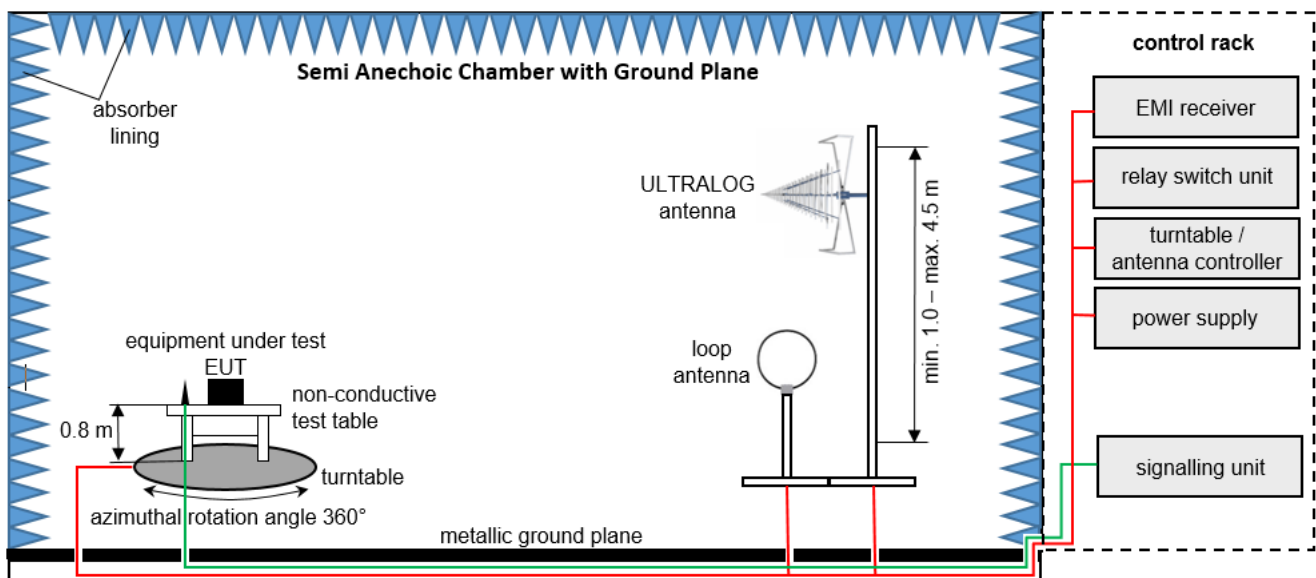

Measurement distance: loop antenna 3 m, ULTRALOG antenna 3 m  
EMC32 software version: 11.10.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

**List of test equipment used:**

No.	Equipment	Manufacturer	Type	Serial No.	INV. No.	Last / Next Calibration
1	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	–
2	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	–
3	Power Supply	Chroma	61604	616040005416	LAB000285	–
4	Positioner	matur GmbH	TD 1.5-10KG		LAB000258	–
5	Compressed Air	Implotex	1-850-30	-	LAB000256	–
6	EMI Test Receiver	Rohde & Schwarz	ESW26	101517	LAB000363	2021-02-05 → 2022-02-05
7	Semi-Anechoic Chamber (SAC)	Albatross Projects GmbH	SAC 5 (Babylon 5)	20168.PRB	LAB000235	2020-08-24 → 2021-08-24
8	Measurement Software	Rohde & Schwarz	EMC32 V11.00.10		LAB000226	–
9	Turntable	matur GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	–
10	Antenna Mast	matur GmbH	CAM4.0-P	CAM4.0-P/316	LAB000224	–
11	Antenna Mast	matur GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	–
12	Controller	matur GmbH	FCU 3.0	10082	LAB000222	–
13	Power Supply	Elektro-Automatik GmbH & Co. KG	PS 2042-10 B	2878350292	LAB000191	–
14	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	–
15	Open Switch and Control Platform	Rohde & Schwarz	OSP200 Base Unit 2HU	101748	LAB000149	–
16	Antenna	Rohde & Schwarz	HL562E	102001	LAB000123	2020-07-05 → 2023-07-05
17	Antenna	Rohde & Schwarz	HFH2-Z2E - Active Loop Antenna	100954	LAB000108	2020-03-25 → 2023-03-25

## 8.2 Fully Anechoic Chamber

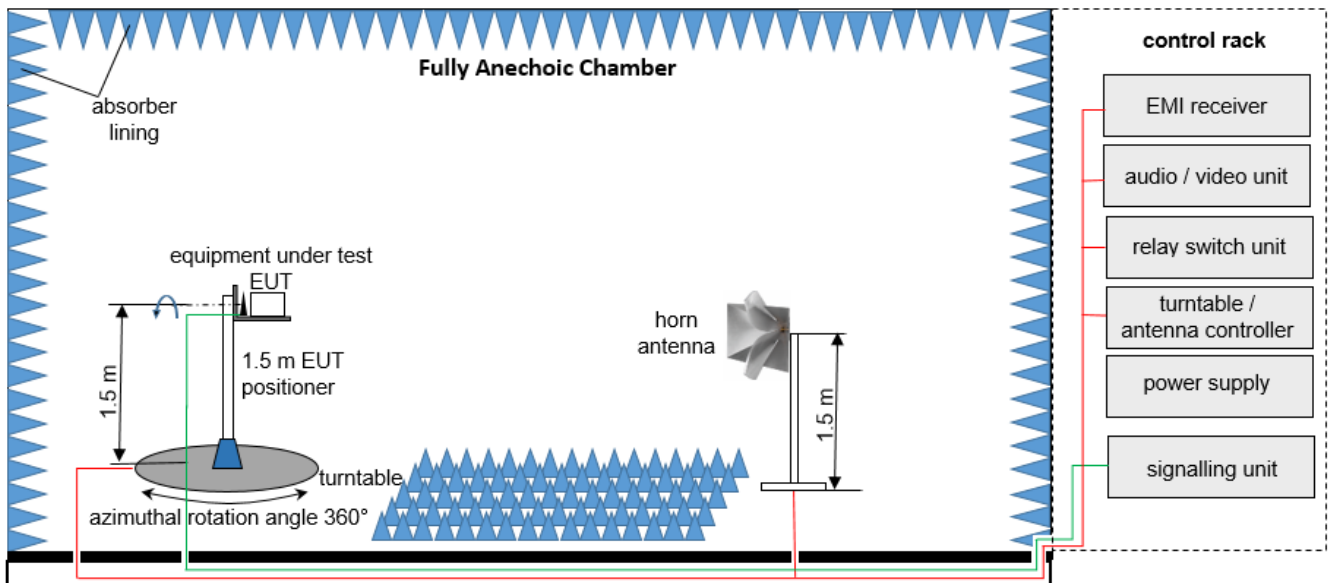

Measurement distance: horn antenna 3 meter  
 EMC32 software version: 11.10.00

$FS = UR + CL + AF$   
 (FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:

$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$

$OP = AV + D - G + CA$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


Example calculation:

$OP [dBm] = -65.0 [dBm] + 50 [dB] - 20 [dBi] + 5 [dB] = -30 [dBm] (1 \mu W)$

**List of test equipment used:**

No.	Equipment	Manufacturer	Type	Serial No.	INV. No.	Last / Next Calibration
1	Power Supply	Elektro-Automatik GmbH & Co. KG	EA-PSI 9080-40 T	2000230001	LAB000313	–
2	Test table	innco systems GmbH	PT1208-080-RH	-	LAB000306	–
3	Power Supply	Chroma	61604	616040005416	LAB000285	–
4	Positioner	matur GmbH	TD 1.5-10KG	–	LAB000258	–
5	Compressed Air	Implotex	1-850-30	-	LAB000256	–
6	EMI Test Receiver	Rohde & Schwarz	ESW26	101517	LAB000363	2021-02-05 → 2022-02-05
7	Semi-Anechoic Chamber (SAC)	Albatross Projects GmbH	SAC 5 (Babylon 5)	20168.PRB	LAB000235	2020-08-24 → 2021-08-24
8	Measurement Software	Rohde & Schwarz	EMC32 V11.00.10	–	LAB000226	–
9	Turntable	matur GmbH	TT2.0-2t	TT2.0-2t/921	LAB000225	–
10	Antenna Mast	matur GmbH	BAM4.5-P	BAM4.5-P/272	LAB000223	–
11	Controller	matur GmbH	FCU 3.0	10082	LAB000222	–
12	Power Supply	Elektro-Automatik GmbH & Co. KG	PS 2042-10 B	2878350292	LAB000191	–
13	Pre-Amplifier	Schwarzbeck Mess-Elektronik OHG	BBV 9718 C	84	LAB000169	–
14	Open Switch and Control Platform	Rohde & Schwarz	OSP200 Base Unit 2HU	101748	LAB000149	–
15	Antenna	Rohde & Schwarz	HF907	102898	LAB000124	2020-04-23 → 2023-04-23
16	HP-filter	AtlantRF	–	–	LAB000382	–

### 8.3 Radiated measurements > 18 GHz

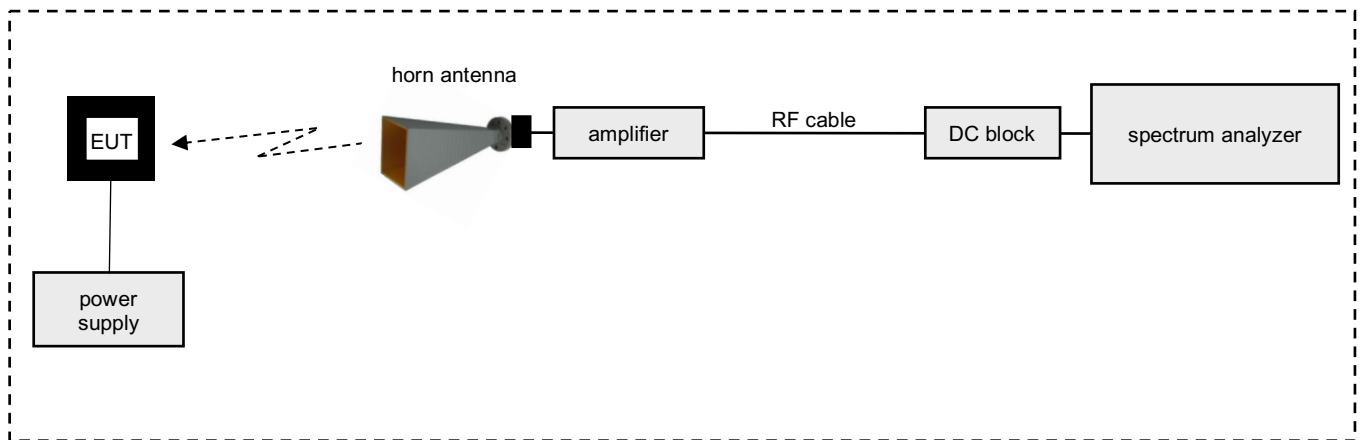


**List of test equipment used:**

No.	Equipment	Manufacturer	Type	Serial No.	INV. No.	Last / Next Calibration
1	Test table	innco systems GmbH	PT0707-RH light	-	LAB000303	-
2	WG-Coax-Adapter	Flann Microwave Ltd	20093-TF30 UBR220	273374	LAB000181	-
3	Coaxial Cable	Huber & Suhner	SF101/1.5m	503987/1	LAB000165	-
4	Antenna	Flann Microwave Ltd	20240-20	266403	LAB000128	2020-06-29 → 2023-06-29
5	Spectrum Analyser	Rohde & Schwarz	FSW43	101391	LAB000289	2021-07-02 → 2022-07-02

### 8.4 Conducted measurements WLAN test system R&S TS 8997

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The losses for all signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

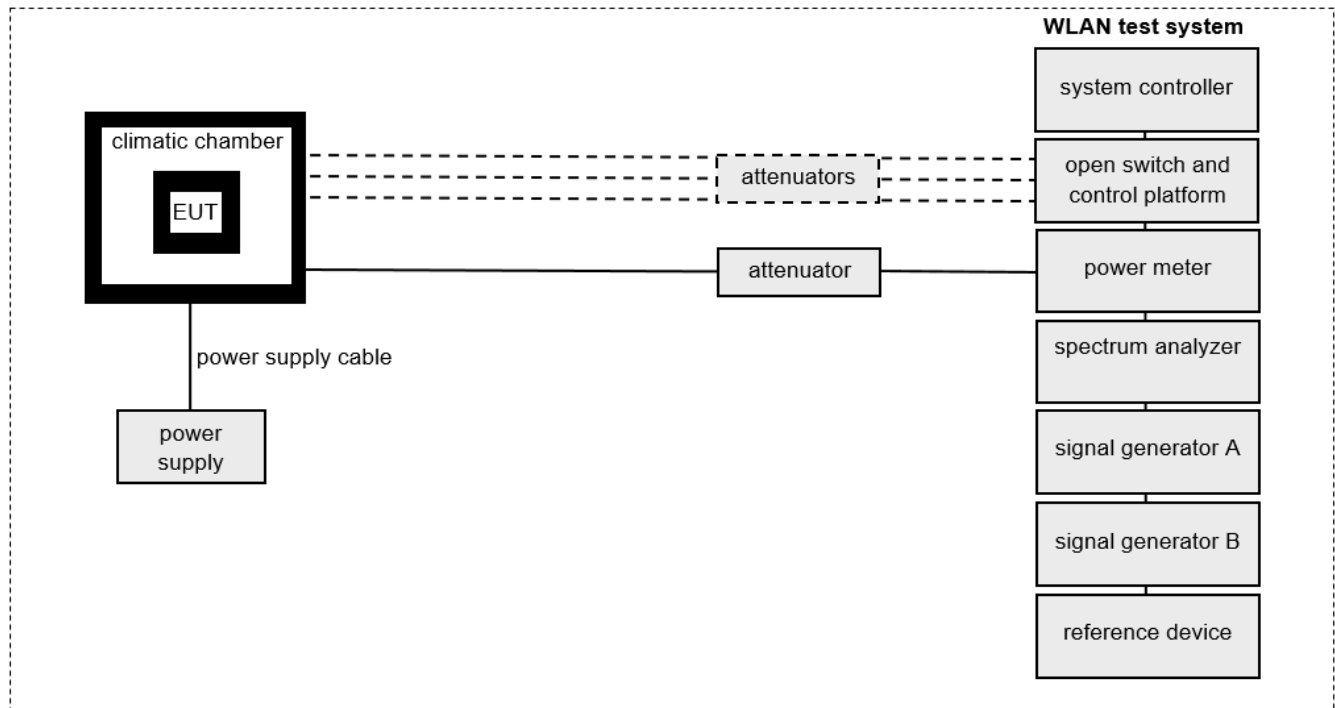

EMC32/WMS32 software version: 11.00.00

**List of test equipment used:**

No.	Equipment	Manufacturer	Type	Serial No.	INV. No.	Last / Next Calibration
1	TS8997-Rack	Rohde & Schwarz	TS8997-Rack	100829	LAB000322	–
2	Open Switch and Control Platform	Rohde & Schwarz	OSP-B157WX	101247	LAB000280	–
3	Open Switch and Control Platform	Rohde & Schwarz	OSP-B157W8	100982	LAB000279	–
4	Spectrum Analyser	Rohde & Schwarz	FSV40	101403	LAB000278	2021-06-15 → 2022-06-15
5	Signal Generator	Rohde & Schwarz	SMBV100A	258240	LAB000277	2021-06-02 → 2022-06-02
6	Signal Generator	Rohde & Schwarz	SMB100A-20	178175	LAB000276	2021-05-27 → 2022-05-27
7	Radio Communication Tester	Rohde & Schwarz	CMW270	101479	LAB000275	–
8	Controller	Hewlett Packard	ATS-Z230	101379	LAB000274	–
9	Power Supply	EA	PS 2042-10 B	2878350263	LAB000190	–

## 9 MEASUREMENT UNCERTAINTIES

Radio frequency	$\leq \pm 1 \times 10^{-7}$
RF power, conducted	$\leq \pm 0.75$ dB
Power spectral density	$\leq \pm 3$ dB
Maximum frequency deviation	$\leq \pm 5$ %
Deviation limitation Duty Cycle, Tx-sequence, Tx-gap	$\leq \pm 5$ %
Occupied channel bandwidth	$\leq \pm 5$ %
Conducted spurious emission of transmitter	$\leq \pm 4$ dB
Conducted emission of receivers	$\leq \pm 4$ dB
Radiated emission of transmitter	$\leq \pm 6$ dB
Radiated emission of receiver	$\leq \pm 6$ dB
Temperature	$\leq \pm 2.5$ °C
Humidity	$\leq \pm 10$ %

The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor  $k = 2$ . It was determined in accordance with EA-4/02 M:2013. The true value is located in the corresponding interval with a probability of 95 %.

---

## End of Test Report

---



# Annex A

Test results of EUT

part of / in addition to

**Test report no.:** 21086129-23008-1

Tested by  
(name, function, signature)

*Piotr Sardyko*  
*Deputy Head of Laboratory RF*



signature

Approved by  
(name, function, signature)

*Dr.-Ing. Harald Ansorge*  
*Managing Director*



signature

## 1 TABLE OF CONTENTS

1	TABLE OF CONTENTS .....	2
2	TEST RESULTS .....	3
2.1	Variant ID #28 .....	3
2.2	Variant ID #33 .....	20
2.3	Variant ID #39 .....	31
2.4	Variant ID #43 .....	48
2.5	Variant ID #48 .....	59
3	Revision History .....	70

## 2 TEST RESULTS

### 2.1 Variant ID #28

#### DUT Information

DUT Name: prePV 28  
 Manufacturer: Mitsubishi Electric Corporation  
 Serial Number: 65112 (conducted)  
 65108 (radiated)

#### 2.1.1 RF Output Power (Conducted Peak Power)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 11.9.2.3.2. Not mandatory.

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
 Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

#### DUT Information


DUT Name: prePV 28  
 Manufacturer: Mitsubishi Electric Corporation  
 Serial Number: 65112 (conducted)

Plot 1: Test Mode 1, GFSK, 1 Mbit/s, RF output power, low channel 0, 2402 MHz

#### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	-3.6	21.0	-3.6	46.411	PASS

Gated Trace

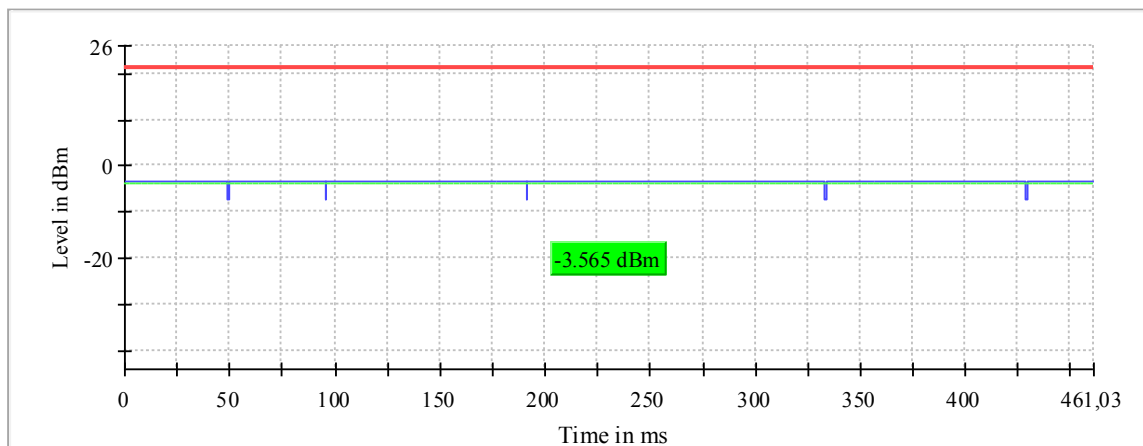

— Gated Trace — Overall — Limit


Annex A of TR no.: 21086129-23008-1

Plot 2: Test Mode 1, GFSK, 1 Mbit/s, RF output power, mid channel 39, 2441 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2441.000000	-2.8	21.0	-2.8	46.415	PASS

Gated Trace

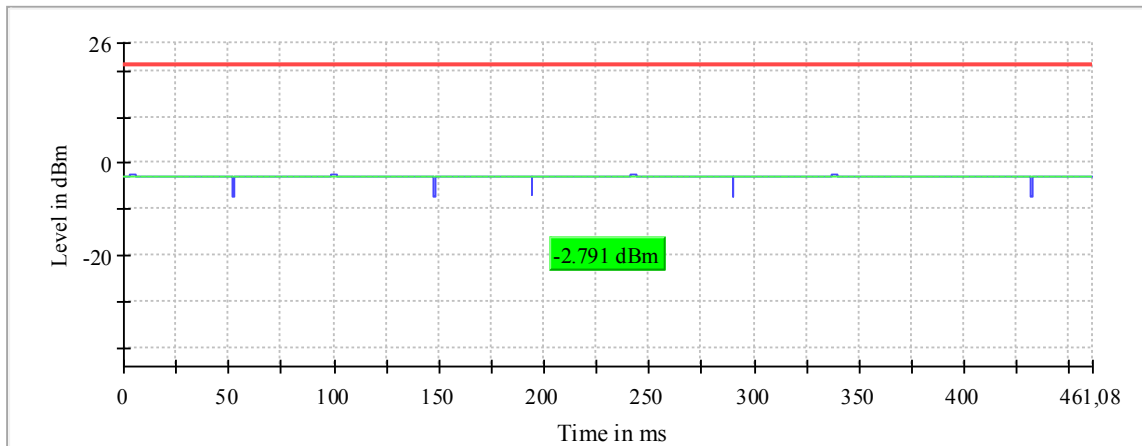


— Gated Trace — Overall — Limit

Plot 3: Test Mode 1, GFSK, 1 Mbit/s, RF output power, high channel 78, 2480 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	-2.7	21.0	-2.7	46.426	PASS

Gated Trace

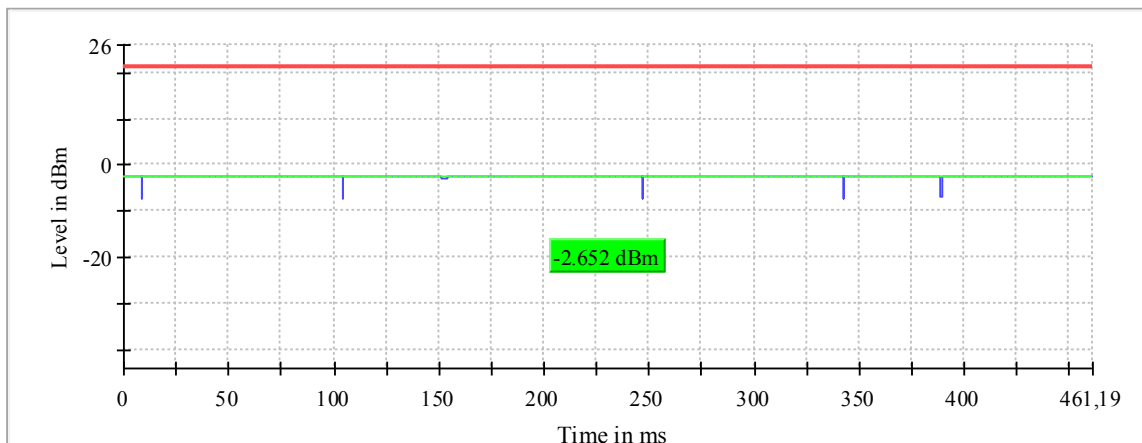


— Gated Trace — Overall — Limit

Plot 4: Test Mode 2,  $\pi/4$ -DQPSK, 2 Mbit/s, RF output power, low channel 0, 2402 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	-4.2	21.0	-4.2	46.439	PASS

Gated Trace

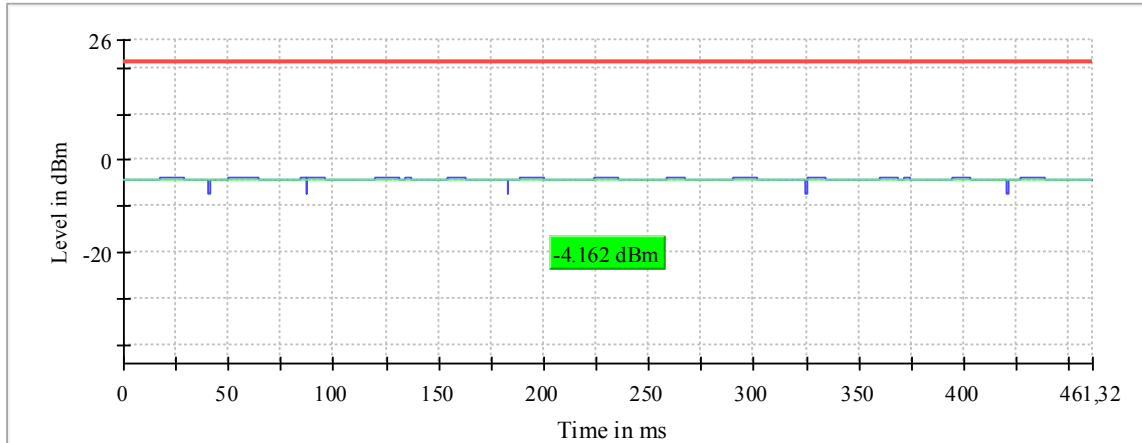


— Gated Trace — Overall — Limit

Plot 5: Test Mode 2,  $\pi/4$ -DQPSK, 2 Mbit/s, RF output power, mid channel 39, 2441 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2441.000000	-3.4	21.0	-3.4	46.470	PASS

Gated Trace

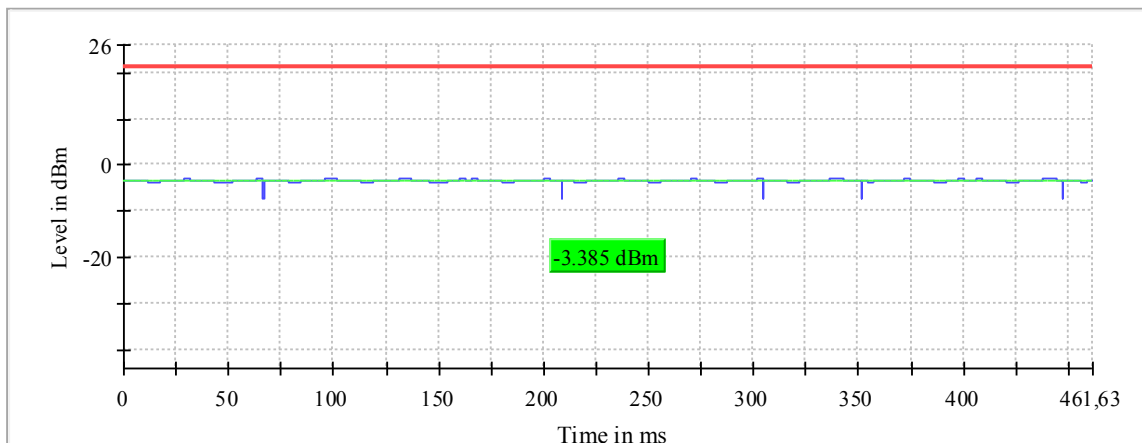


— Gated Trace — Overall — Limit

Plot 6: Test Mode 2,  $\pi/4$ -DQPSK, 2 Mbit/s, RF output power, high channel 78, 2480 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	-3.2	21.0	-3.2	46.437	PASS

Gated Trace

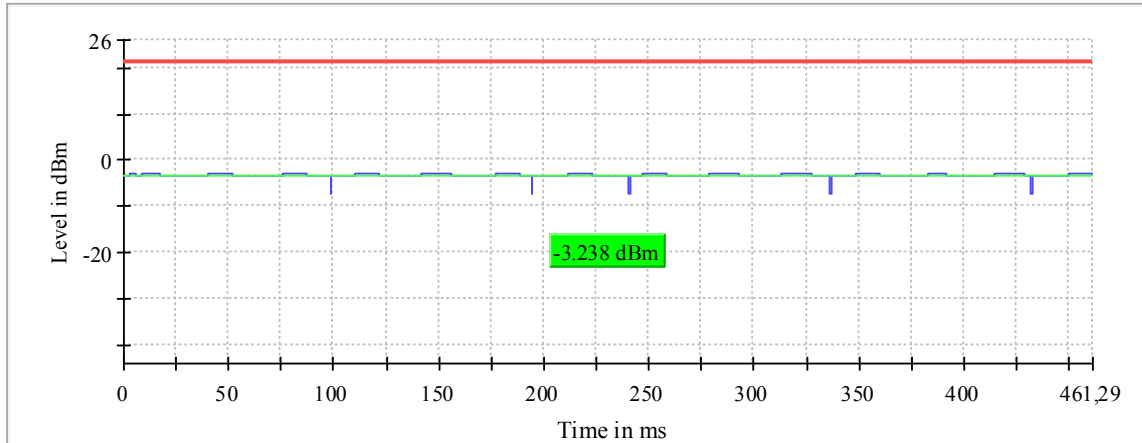


— Gated Trace    — Overall    — Limit

Plot 7: Test Mode 3, 8DPSK, 3 Mbit/s, RF output power, low channel 0, 2402 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	-4.1	21.0	-4.1	46.455	PASS

Gated Trace

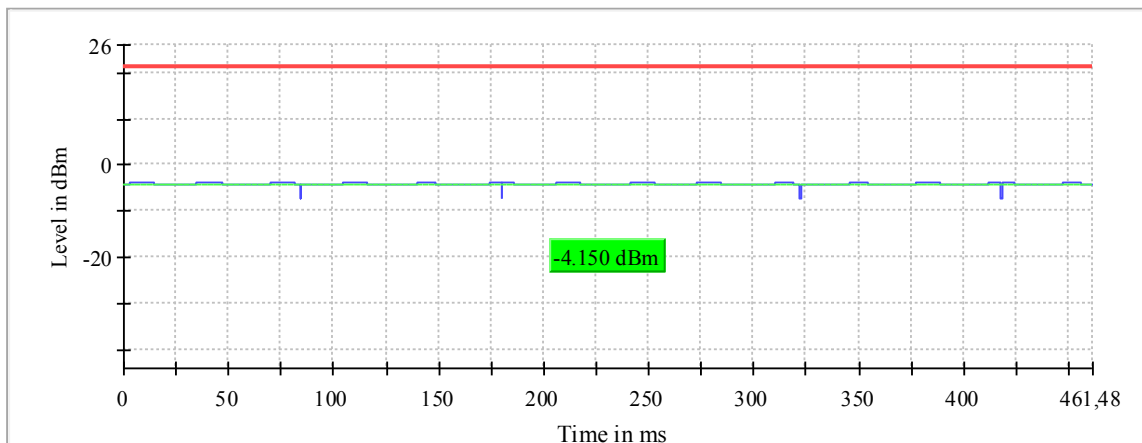


— Gated Trace    — Overall    — Limit

Plot 8: Test Mode 3, 8DPSK, 3 Mbit/s, RF output power, mid channel 39, 2441 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2441.000000	-3.4	21.0	-3.4	46.420	PASS

Gated Trace

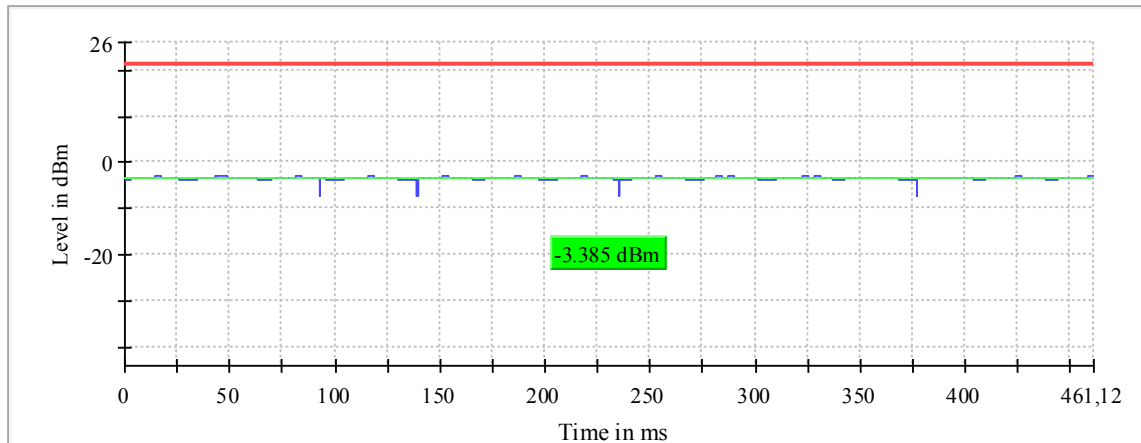


— Gated Trace    — Overall    — Limit

Plot 9: Test Mode 3, 8DPSK, 3 Mbit/s, RF output power, high channel 78, 2480 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	-3.3	21.0	-3.3	46.483	PASS

Gated Trace

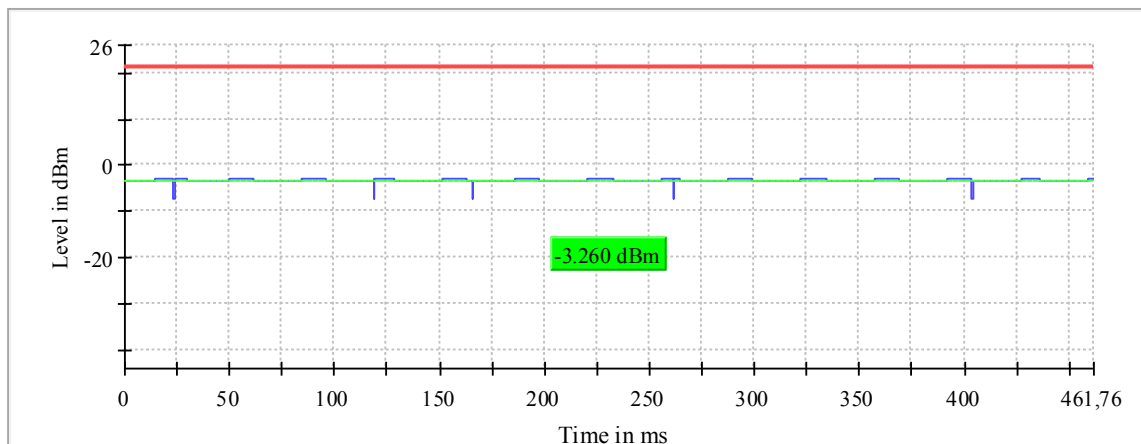


— Gated Trace    — Overall    — Limit

**2.1.2 Radiated Peak Power (Peak EIRP)**

**DUT Information**

DUT Name: prePV 28  
 Manufacturer: Mitsubishi Electric Corporation  
 Serial Number: 65108 (radiated)

Plot 10: Test Mode 1, GFSK, 1 Mbit/s, Peak EIRP, low channel 0, 2402 MHz

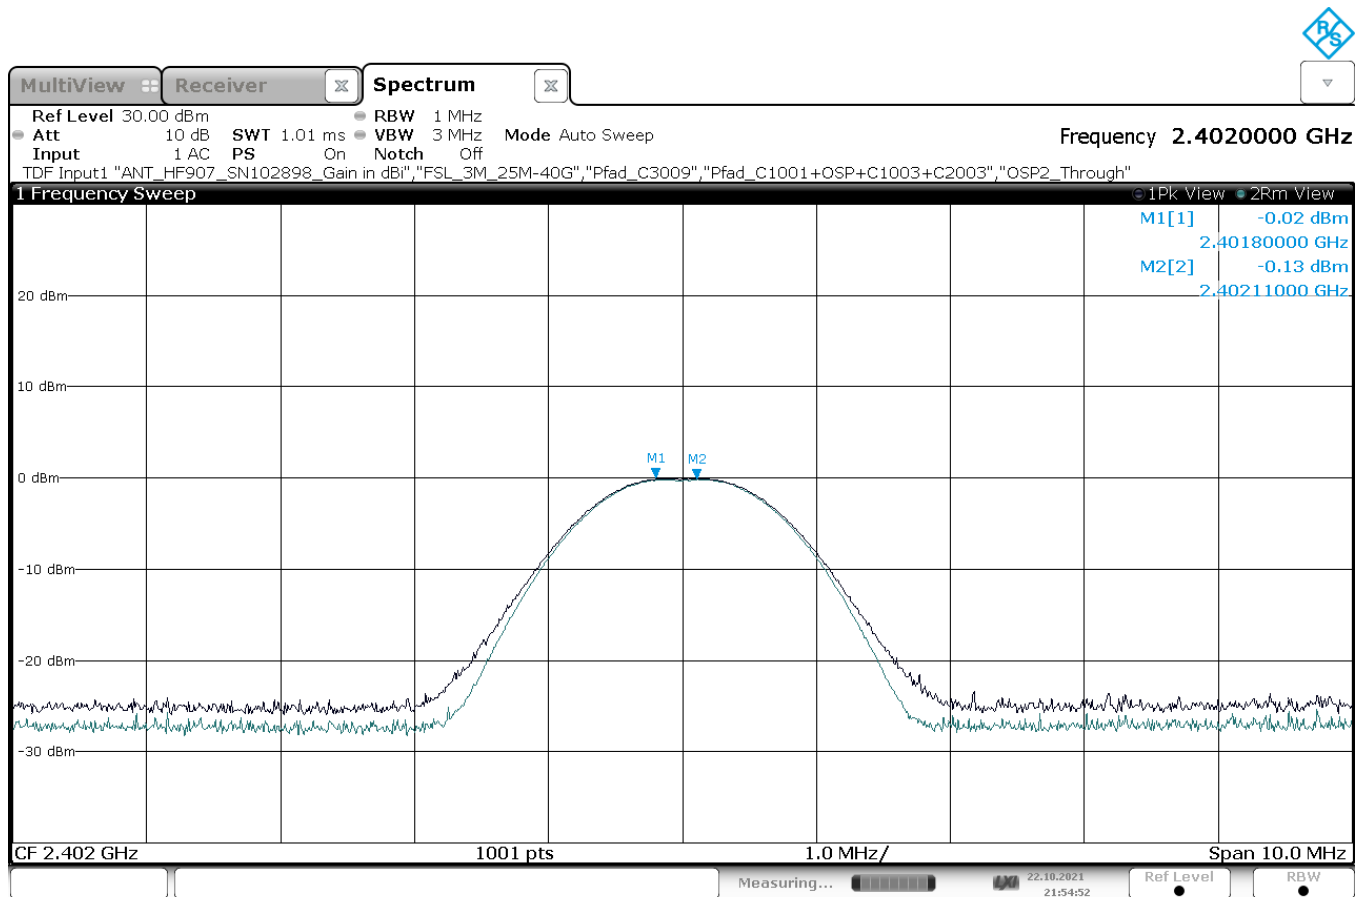


21:54:53 22.10.2021



Annex A of TR no.: 21086129-23008-1


Plot 11: Test Mode 1, GFSK, 1 Mbit/s, Peak EIRP, high channel 78, 2480 MHz

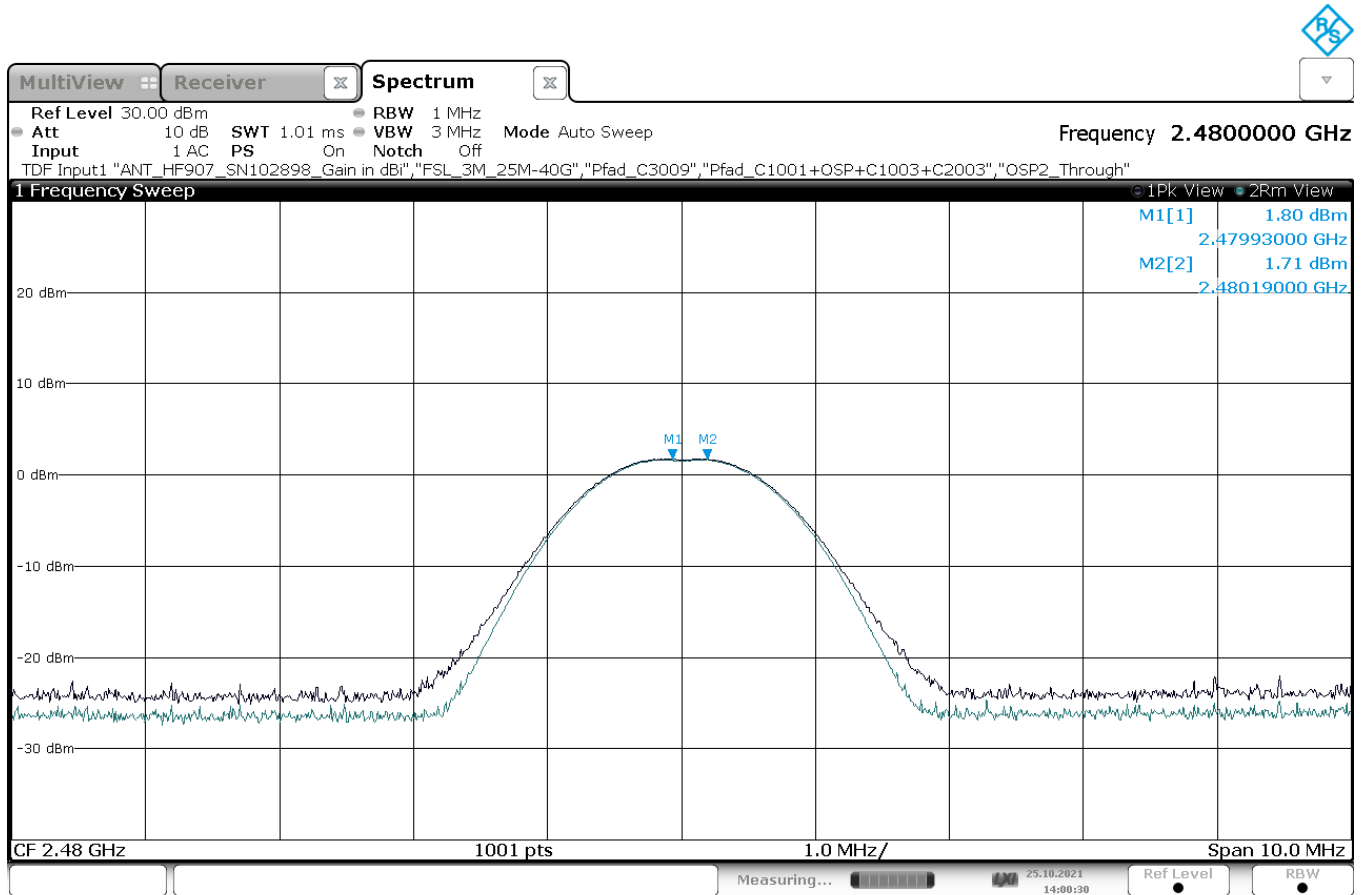

14:00:30 25.10.2021

**2.1.3 Band Edge Compliance (BEC), radiated**


Plot 12: Mode 1, BEC, low channel 0, 2402 MHz

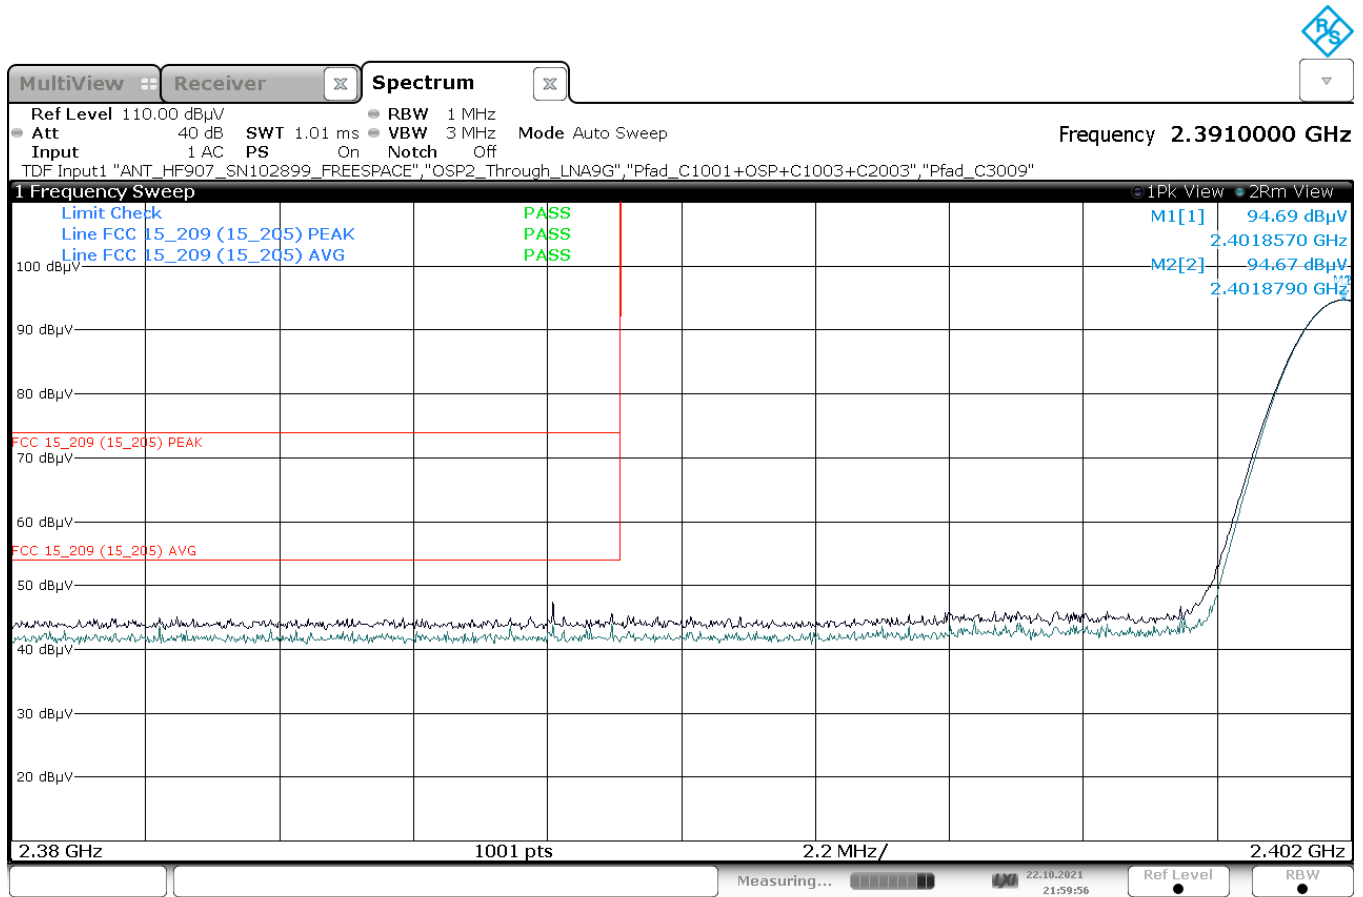

21:59:56 22.10.2021

Annex A of TR no.: 21086129-23008-1


Plot 13: Mode 1, BEC, high channel 78, 2480 MHz

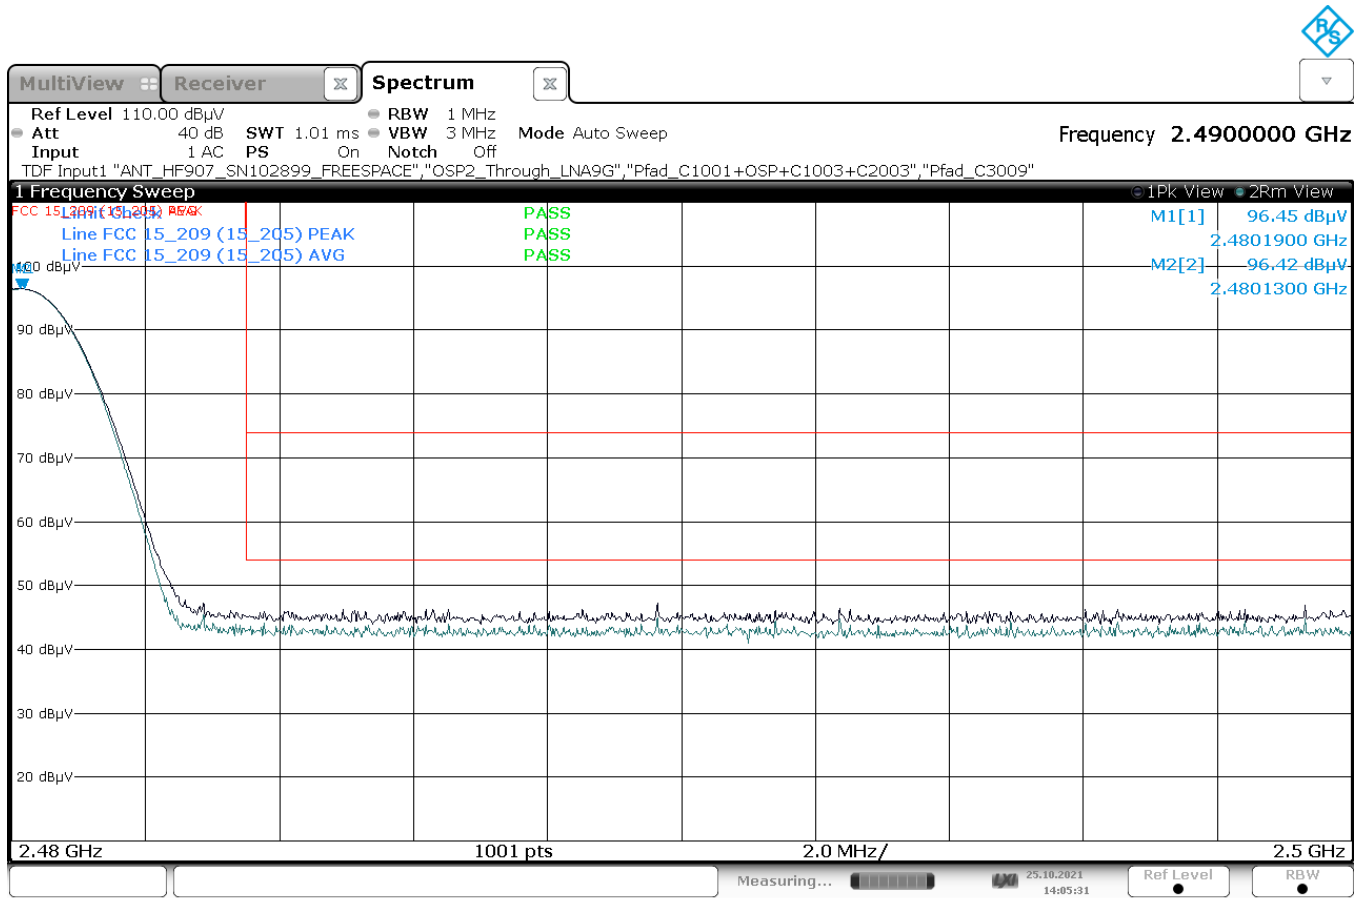

14:05:32 25.10.2021


**2.1.4 Radiated Spurious Emissions (RSE)**

Plot 14: Mode 1, RSE 9 kHz – 30 MHz, low channel, loop antenna

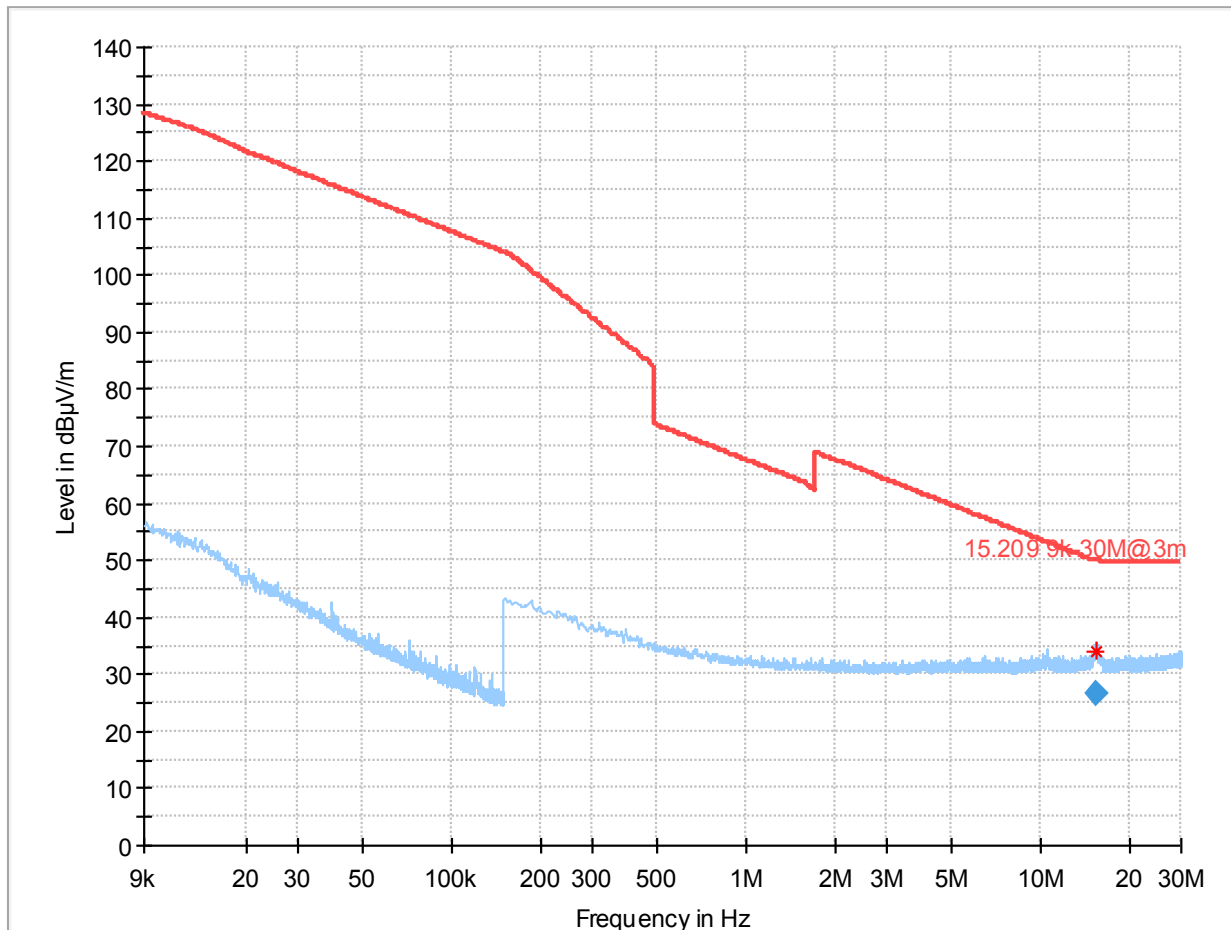


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
15.342000	26.73	50.04	23.31	100.0	9.000	V	300.0	20.5

Plot 15: Mode 1, RSE 9 kHz – 30 MHz, high channel, loop antenna

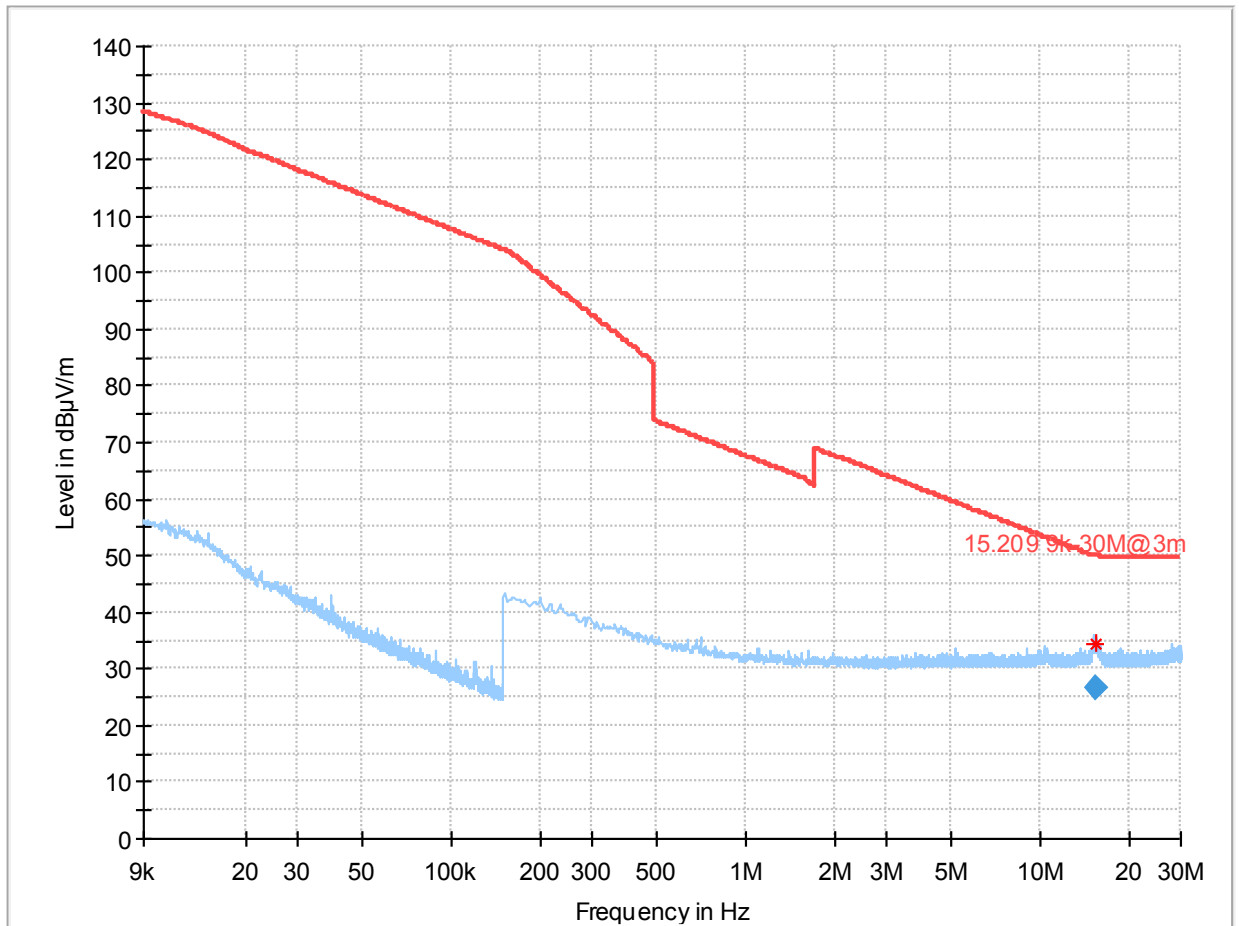


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
15.357750	26.55	50.04	23.49	100.0	9.000	V	246.0	20.5

Plot 16: Mode 1, RSE 30 MHz – 1 GHz, low channel, horizontal / vertical polarisation

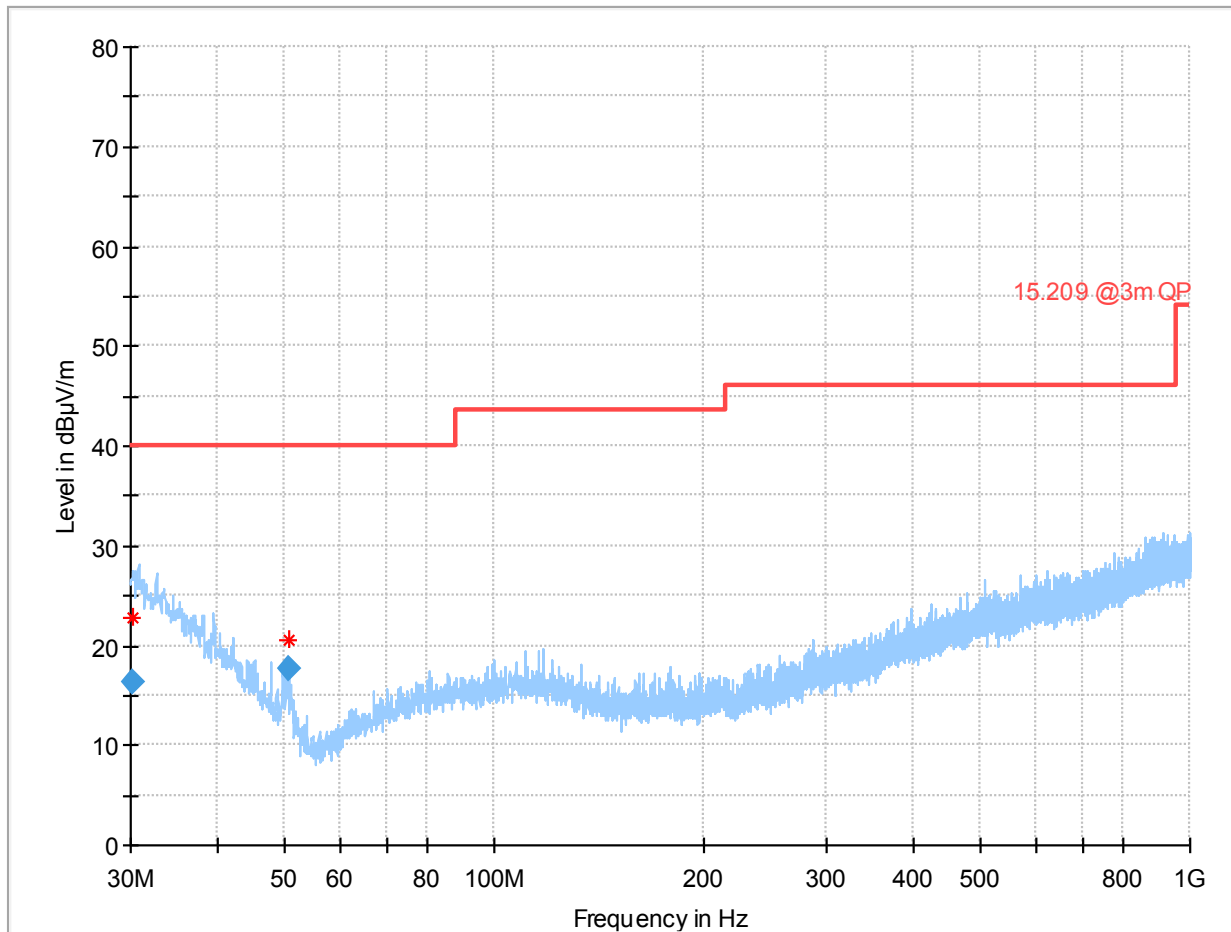


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.324500	16.36	40.00	23.64	100.0	120.000	134.0	V	-2.0
50.492000	17.57	40.00	22.43	100.0	120.000	100.0	V	269.0

Plot 17: Mode 1, RSE 30 MHz – 1 GHz, high channel, horizontal / vertical polarisation

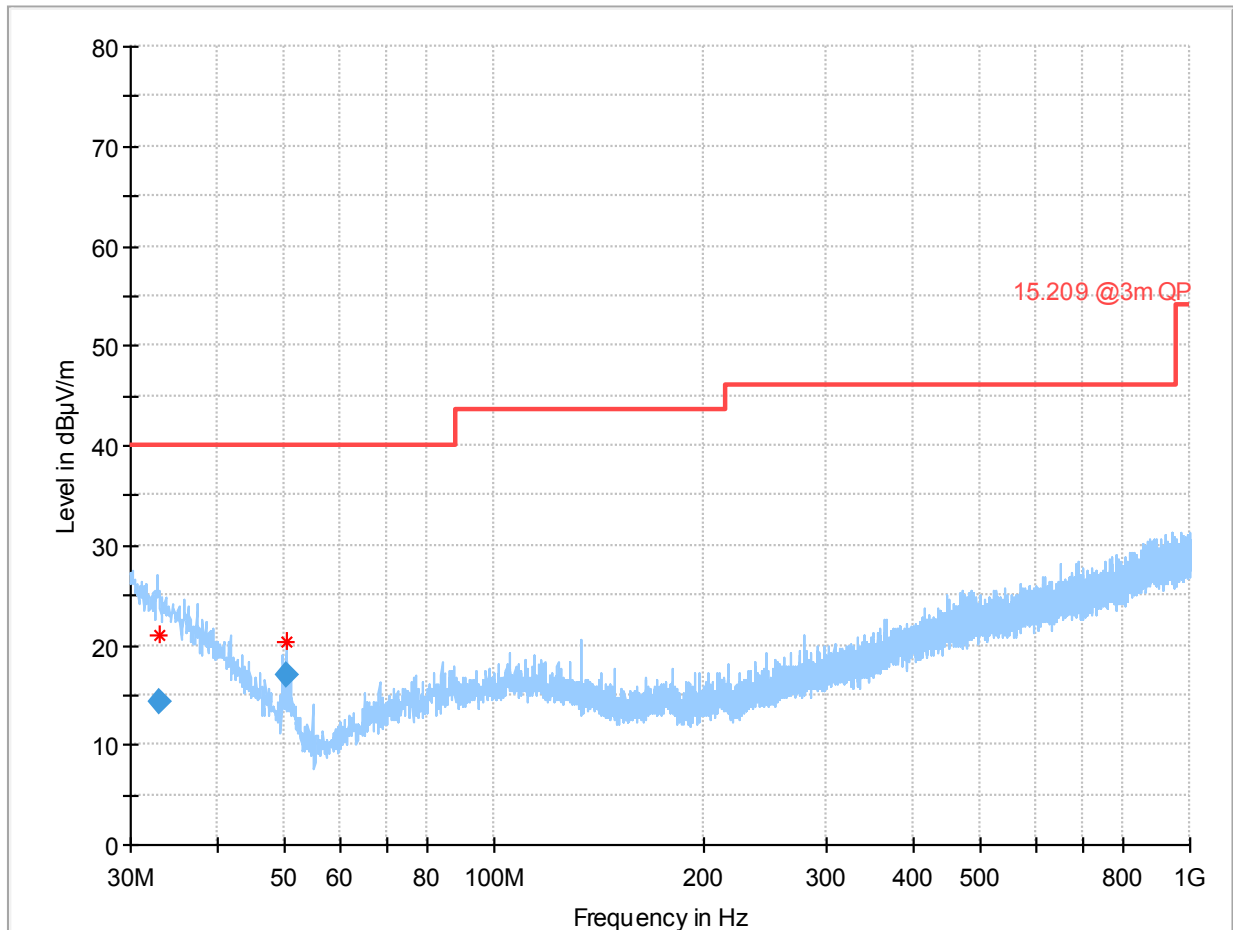

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.091000	14.35	40.00	25.65	100.0	120.000	144.0	H	78.0
50.451000	16.94	40.00	23.06	100.0	120.000	104.0	V	267.0


Plot 18: Mode 1, RSE 1 GHz - 4 GHz, low channel, horizontal / vertical polarisation

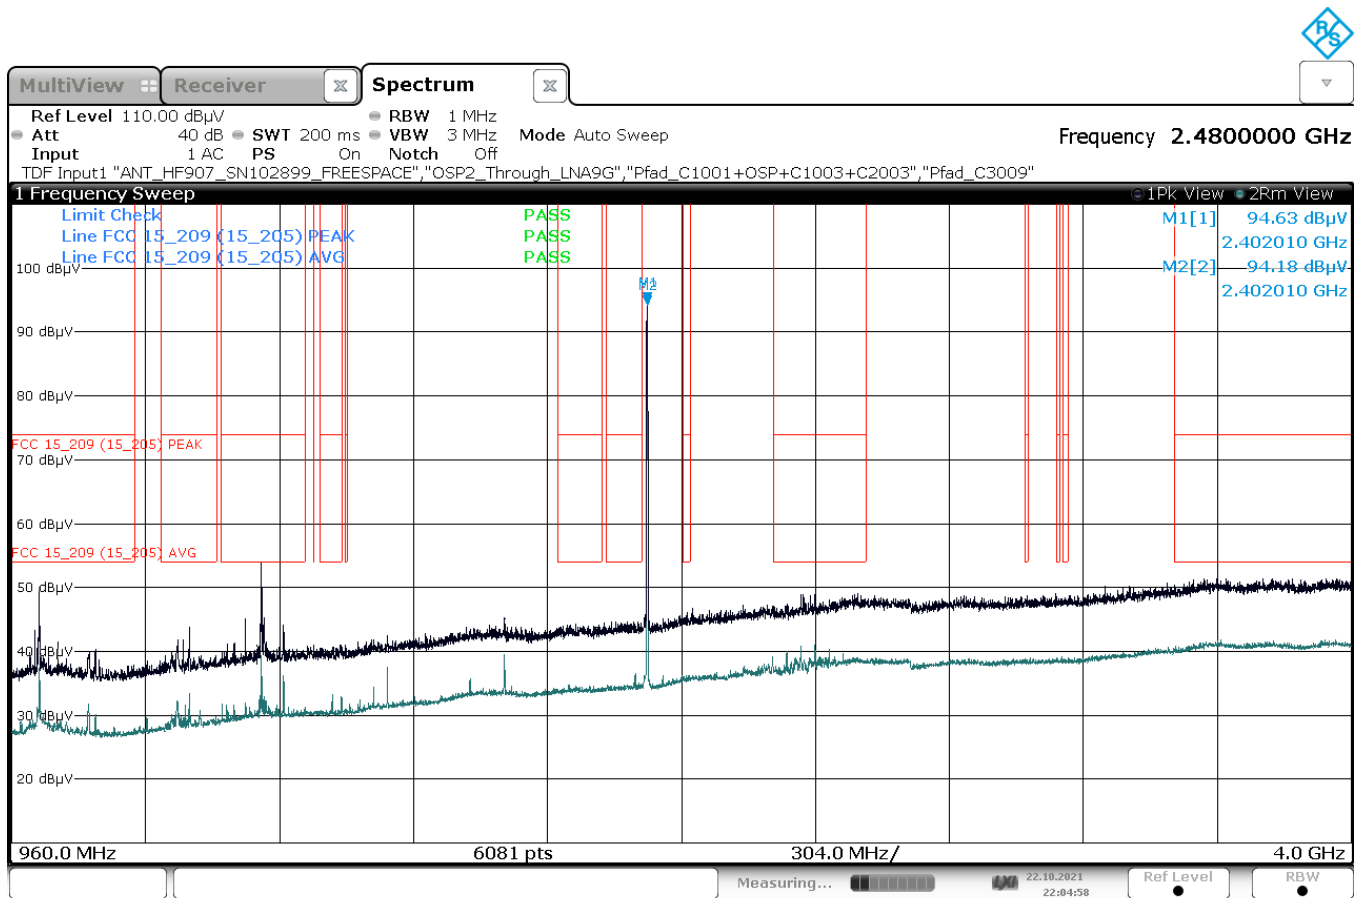

22:04:58 22.10.2021




Plot 19: Mode 1, RSE 1 GHz - 4 GHz, high channel, horizontal / vertical polarisation

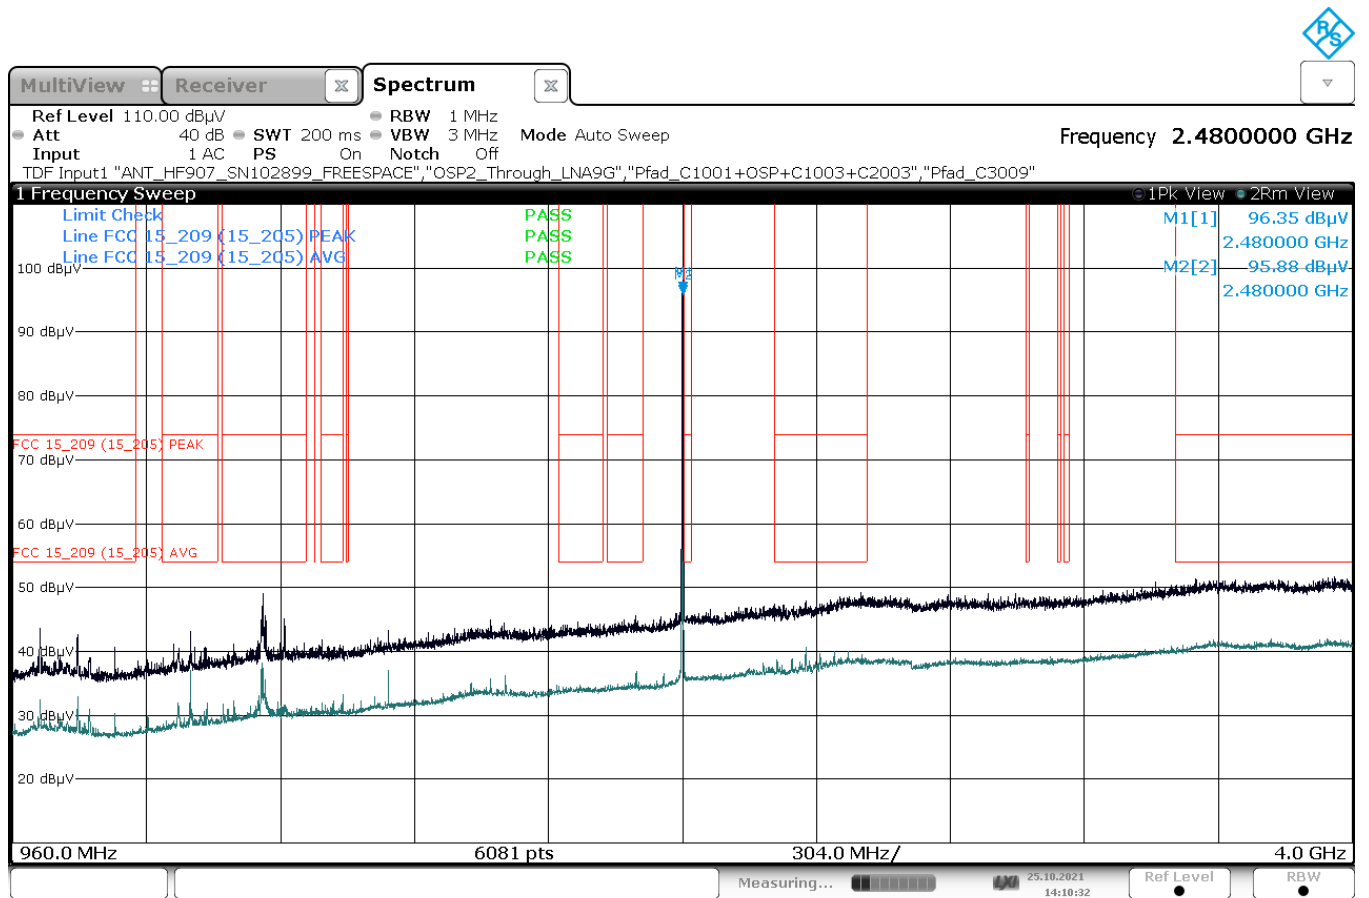

14:10:33 25.10.2021


Annex A of TR no.: 21086129-23008-1

Plot 20: Mode 1, RSE 4 GHz – 9 GHz, low channel, horizontal / vertical polarisation

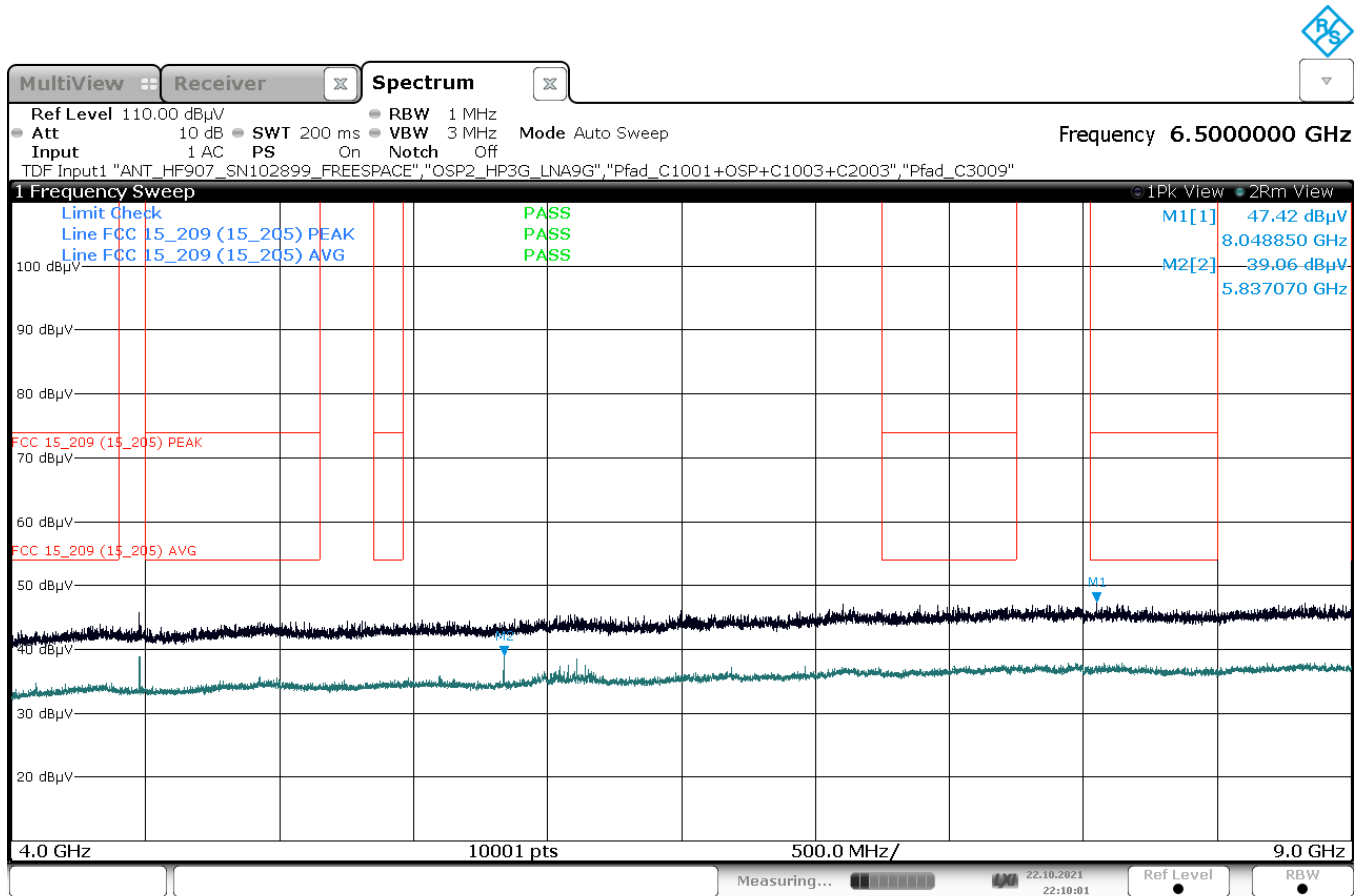

22:10:02 22.10.2021

Plot 21: Mode 1, RSE 4 GHz – 9 GHz, high channel, horizontal / vertical polarisation

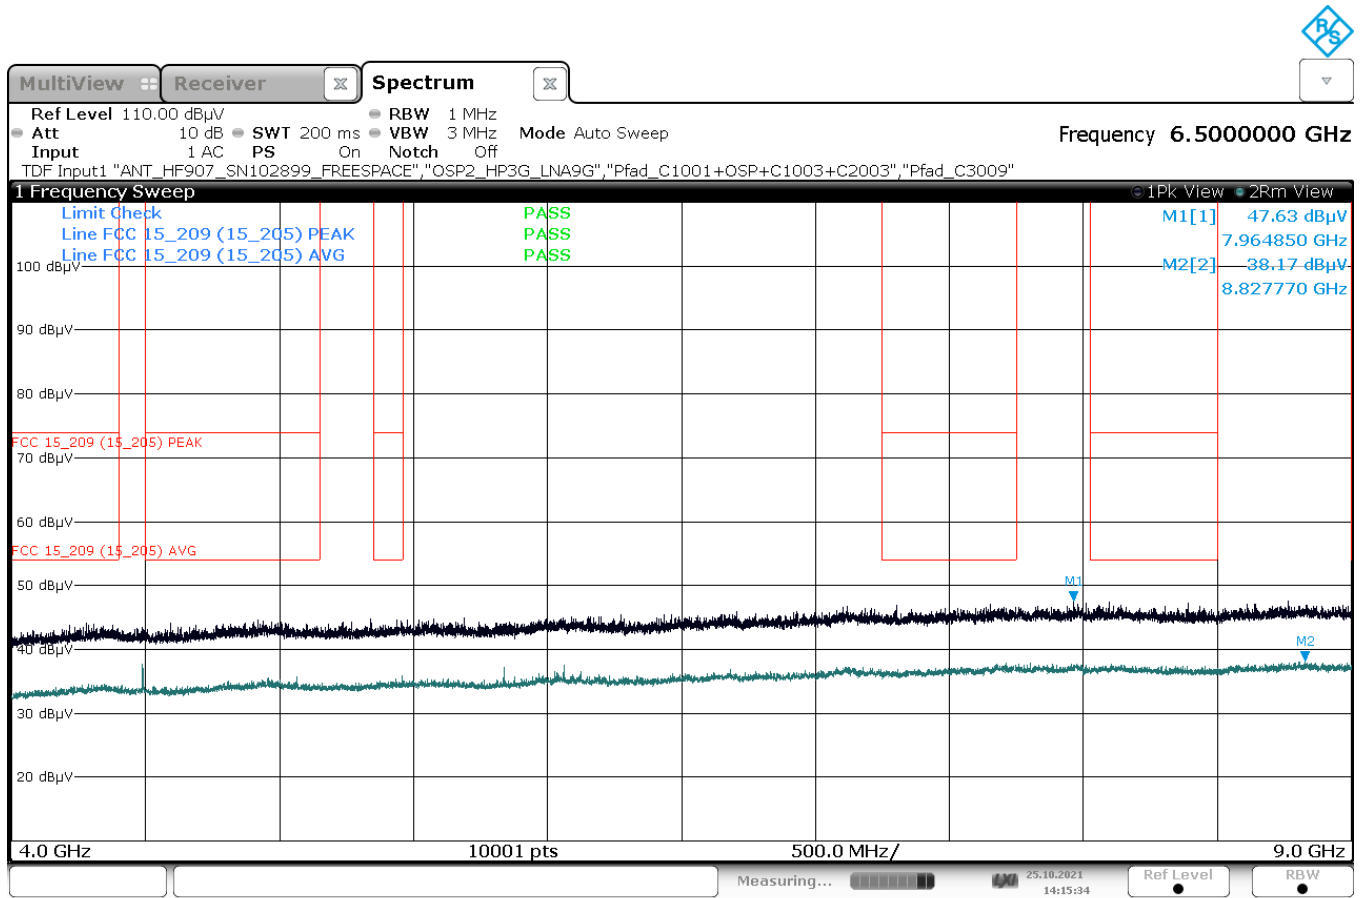

14:15:35 25.10.2021

## 2.2 Variant ID #33

### DUT Information

DUT Name:	prePV 33
Manufacturer:	Mitsubishi Electric Corporation
Serial Number:	66605 (radiated)

#### 2.2.1 RF Output Power (Conducted Peak Power)


See test results of R1LOW-R-SBM DV model (see IBL-Lab test report TR-21065785-20823)

#### 2.2.2 Radiated Peak Power (Peak EIRP)

See test results of R1LOW-R-SBM DV model (see IBL-Lab test report TR-21065785-20823)


**2.2.3 Band Edge Compliance (BEC), radiated**

Plot 22: Mode 1, BEC, low channel 0, 2402 MHz

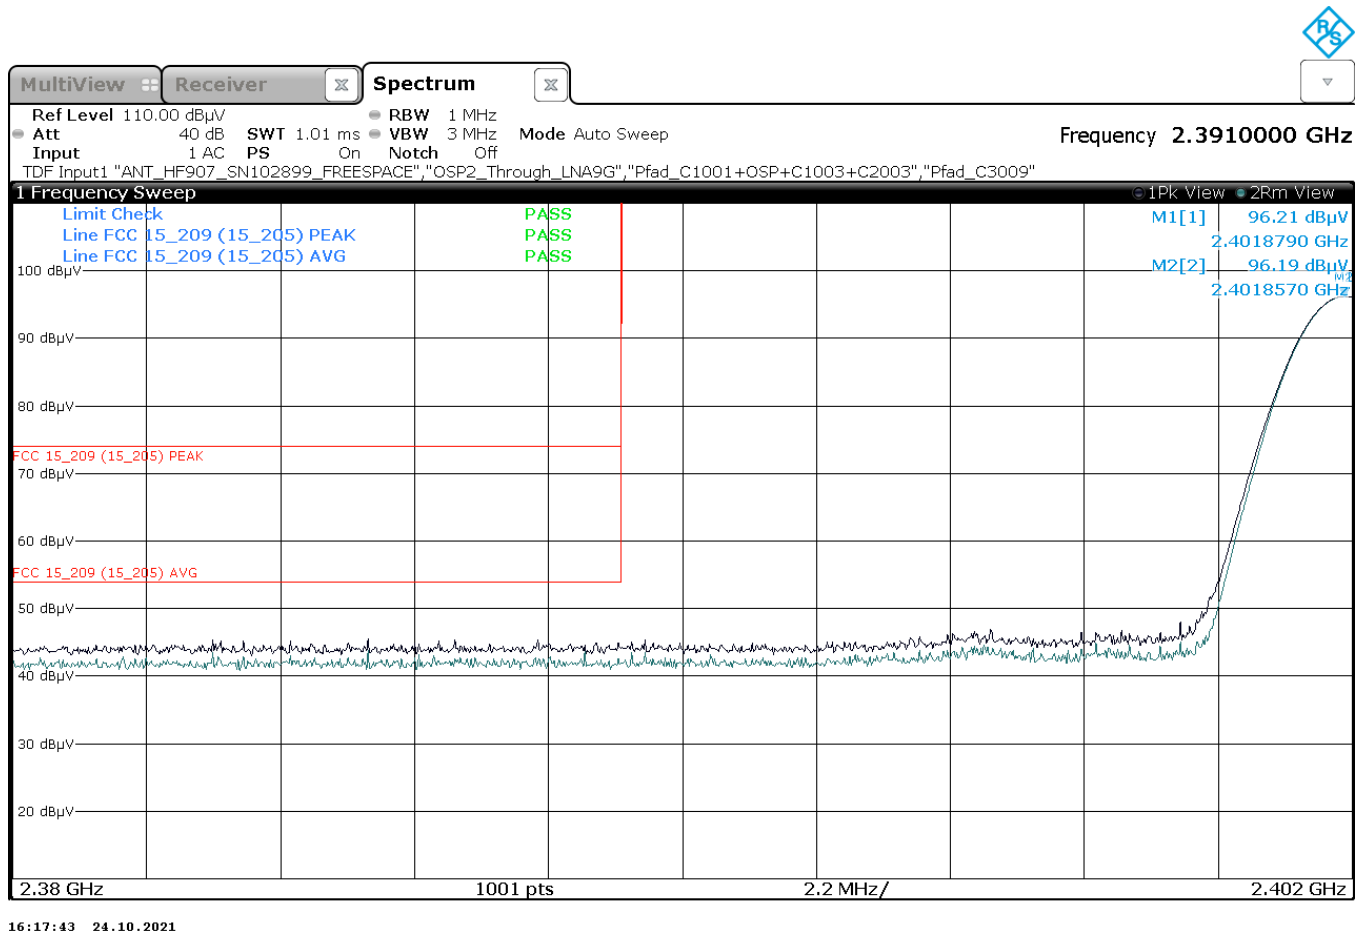

Annex A of TR no.: 21086129-23008-1


Plot 23: Mode 1, BEC, high channel 78, 2480 MHz

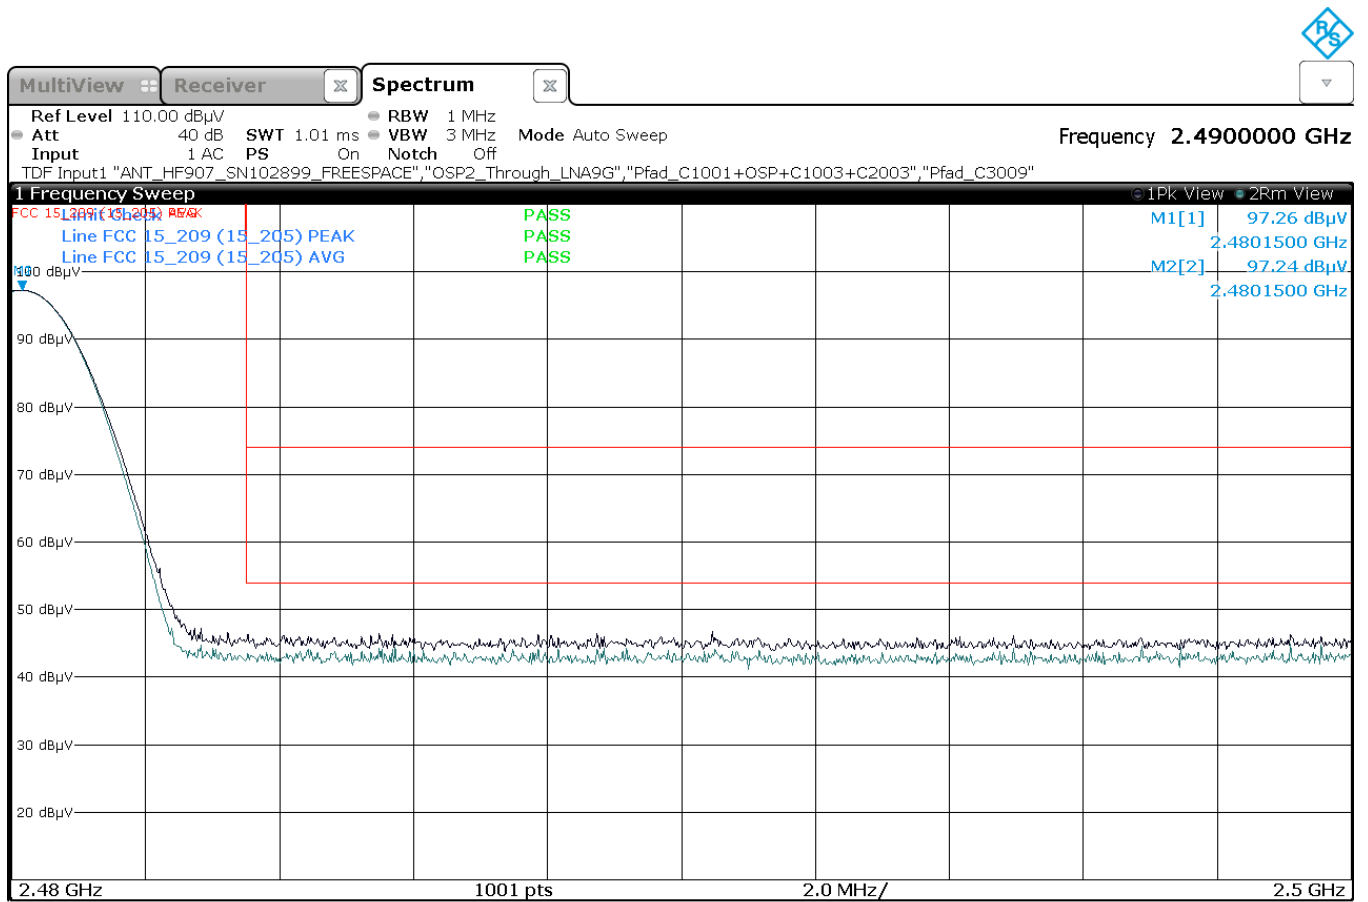

16:33:55 24.10.2021


**2.2.4 Radiated Spurious Emissions (RSE)**

Plot 24: Mode 1, RSE 9 kHz – 30 MHz, low channel, loop antenna

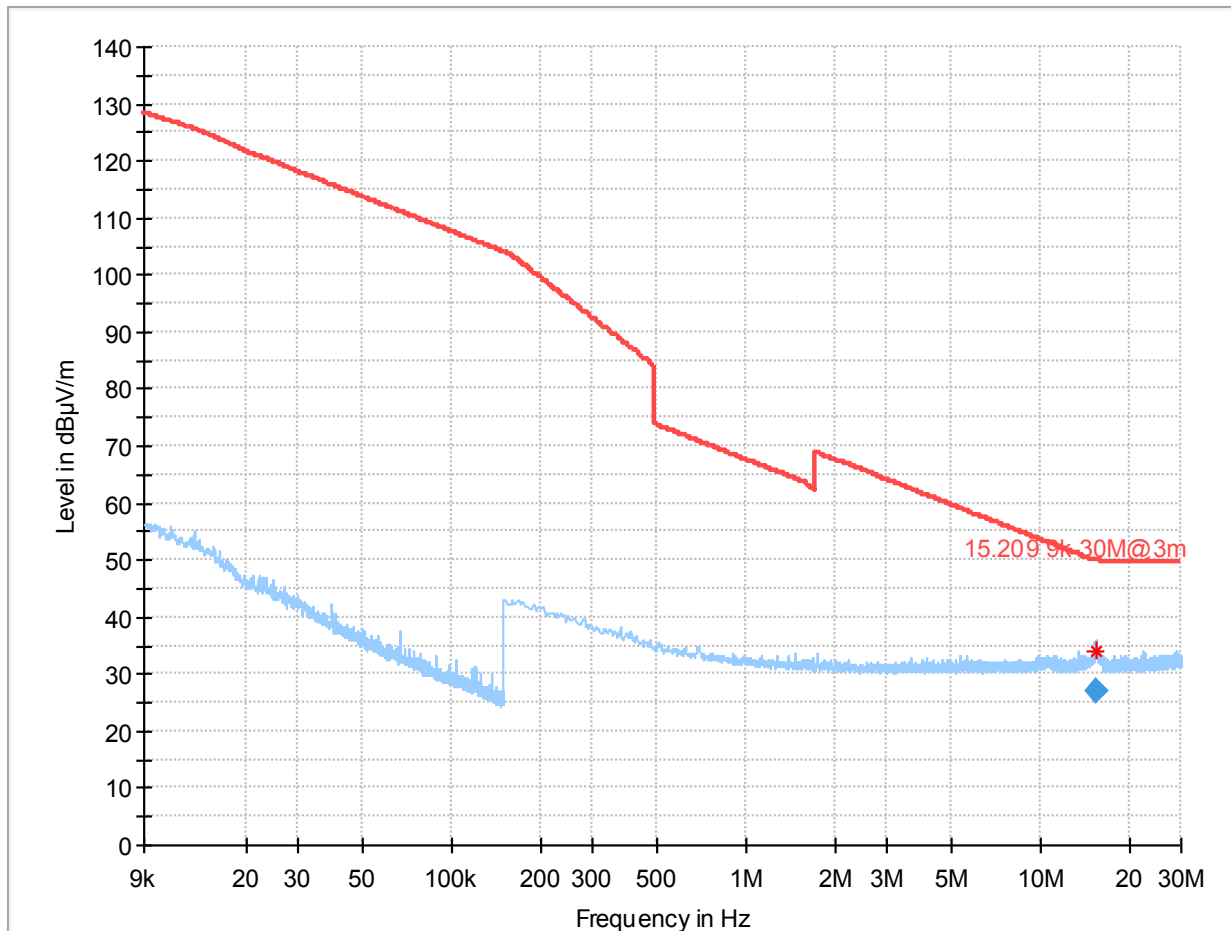

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
15.369000	26.82	50.04	23.22	100.0	9.000	H	300.0	20.5


Plot 25: Mode 1, RSE 9 kHz – 30 MHz, high channel, loop antenna

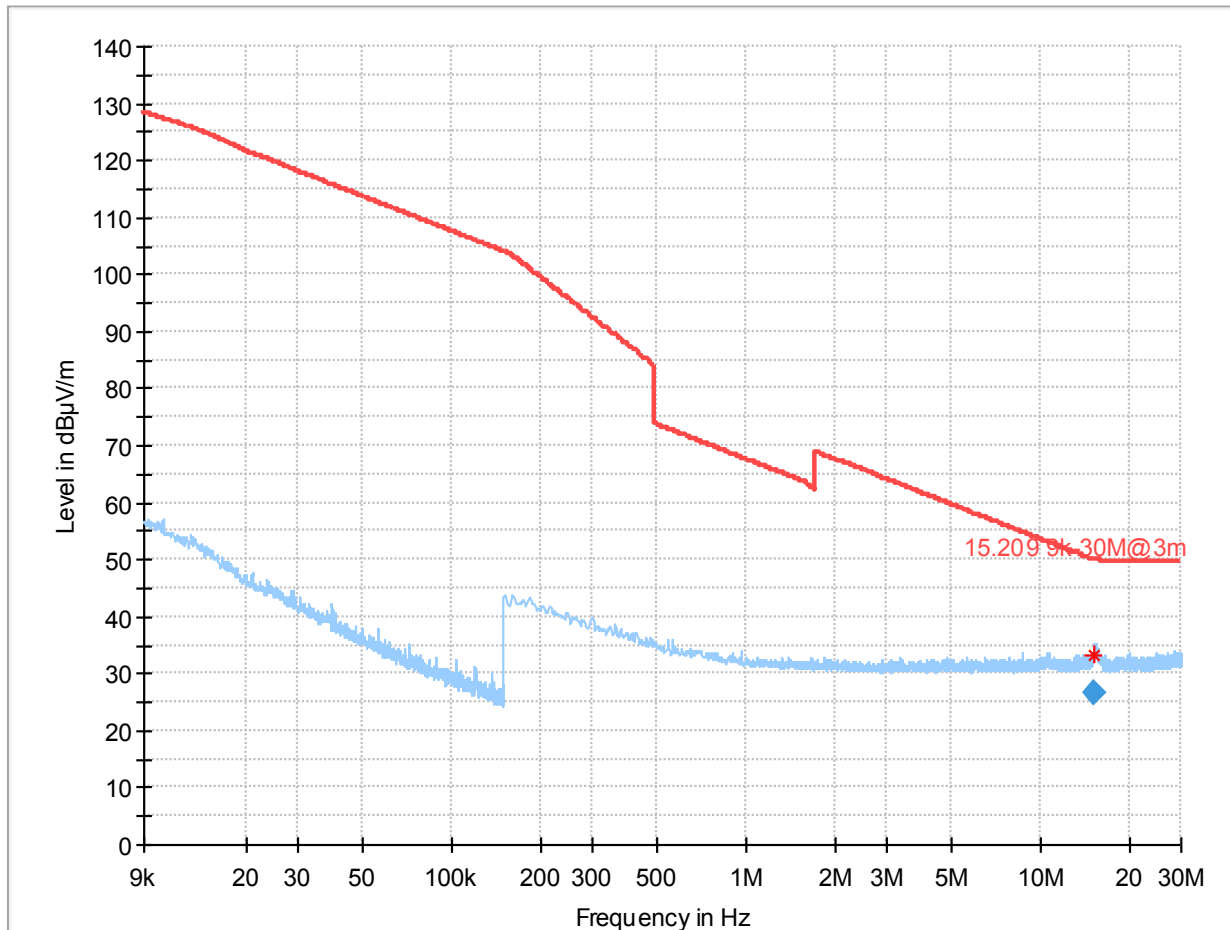

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
15.261000	26.56	50.04	23.48	100.0	9.000	H	240.0	20.5




Plot 26: Mode 1, RSE 30 MHz – 1 GHz, low channel, horizontal / vertical polarisation

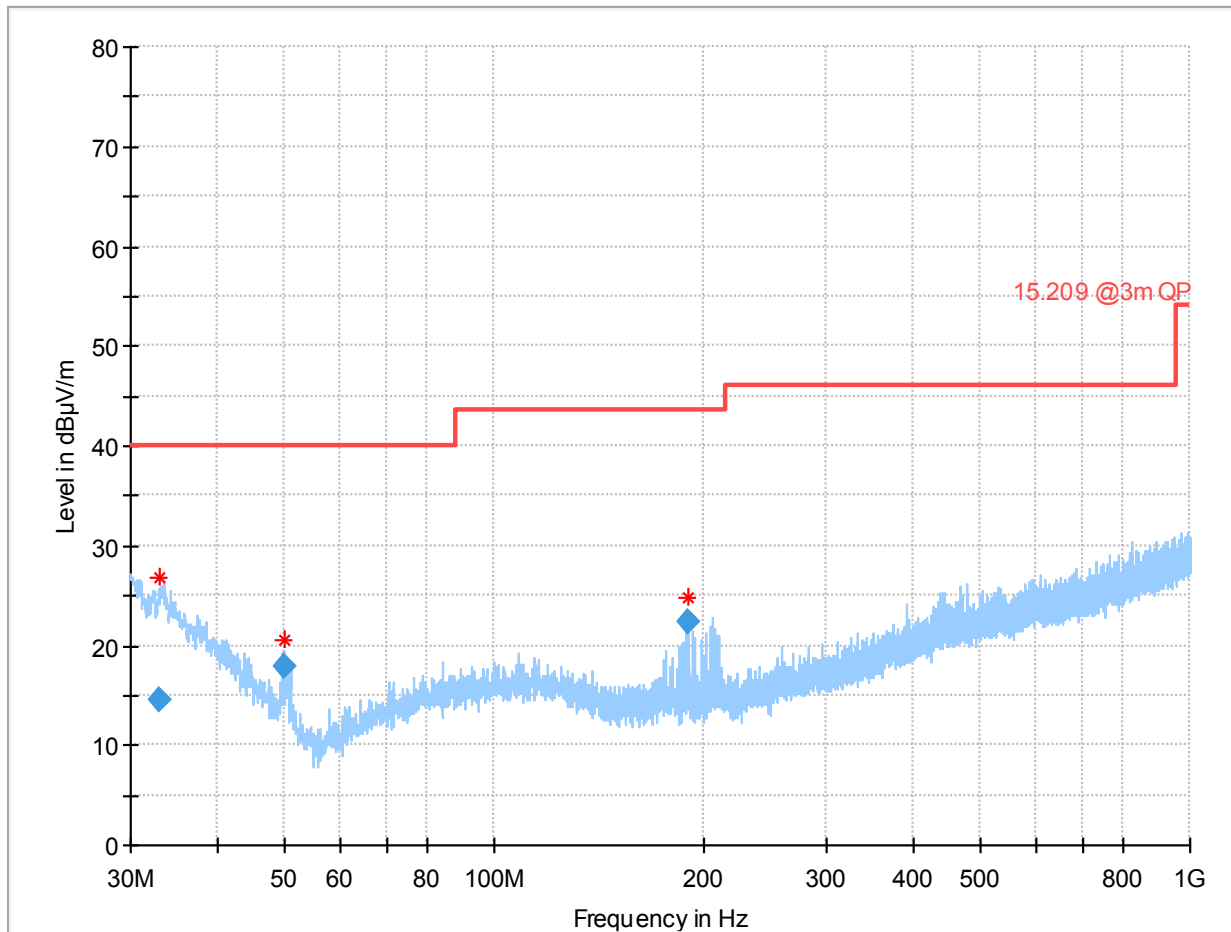


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.090500	14.61	40.00	25.39	100.0	120.000	269.0	V	359.0
49.983500	17.96	40.00	22.04	100.0	120.000	103.0	V	-6.0
190.438000	22.44	43.50	21.06	100.0	120.000	100.0	V	24.0

Plot 27: Mode 1, RSE 30 MHz – 1 GHz, high channel, horizontal / vertical polarisation

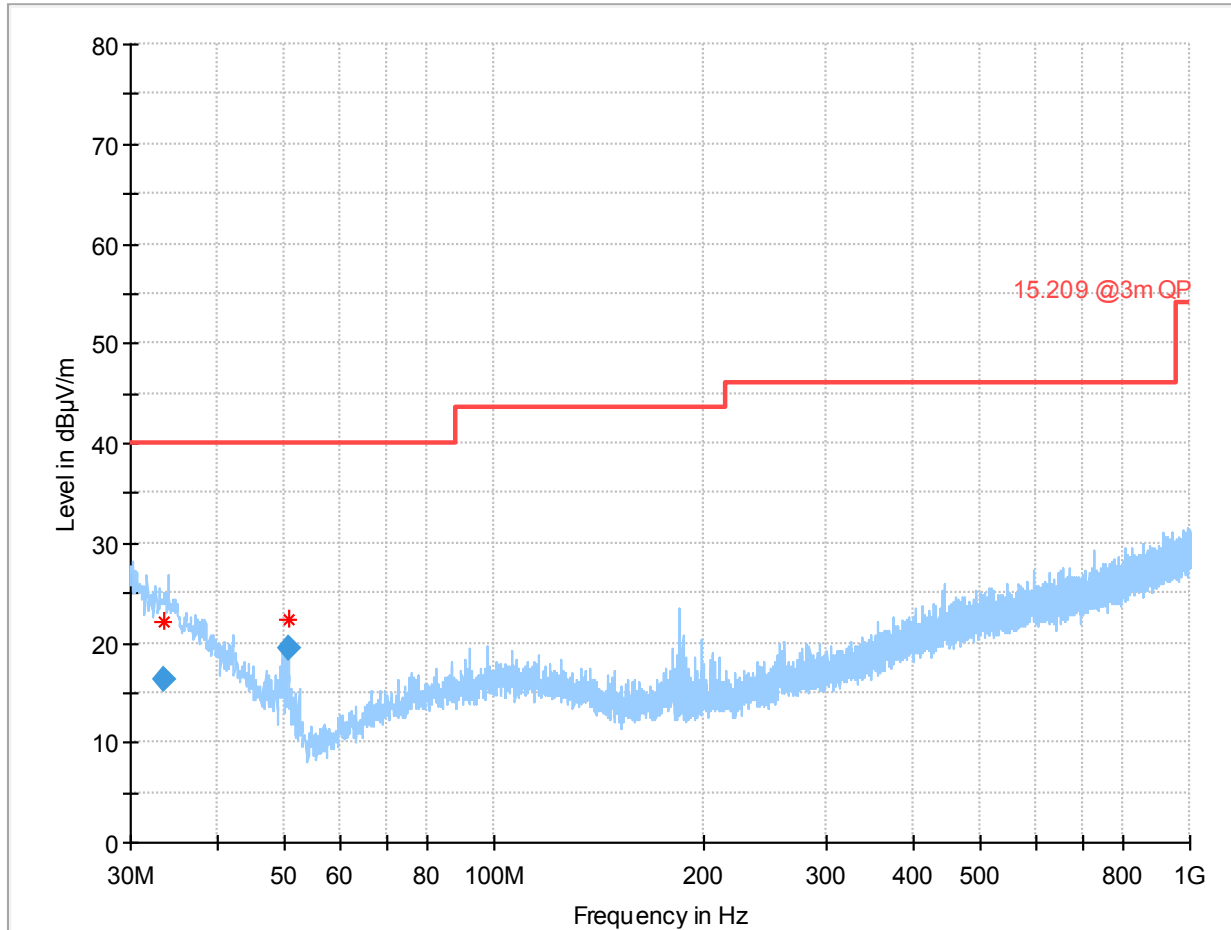

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.599000	16.30	40.00	23.70	100.0	120.000	100.0	V	34.0
50.492000	19.34	40.00	20.66	100.0	120.000	100.0	V	278.0


Plot 28: Mode 1, RSE 1 GHz - 4 GHz, low channel, horizontal / vertical polarisation

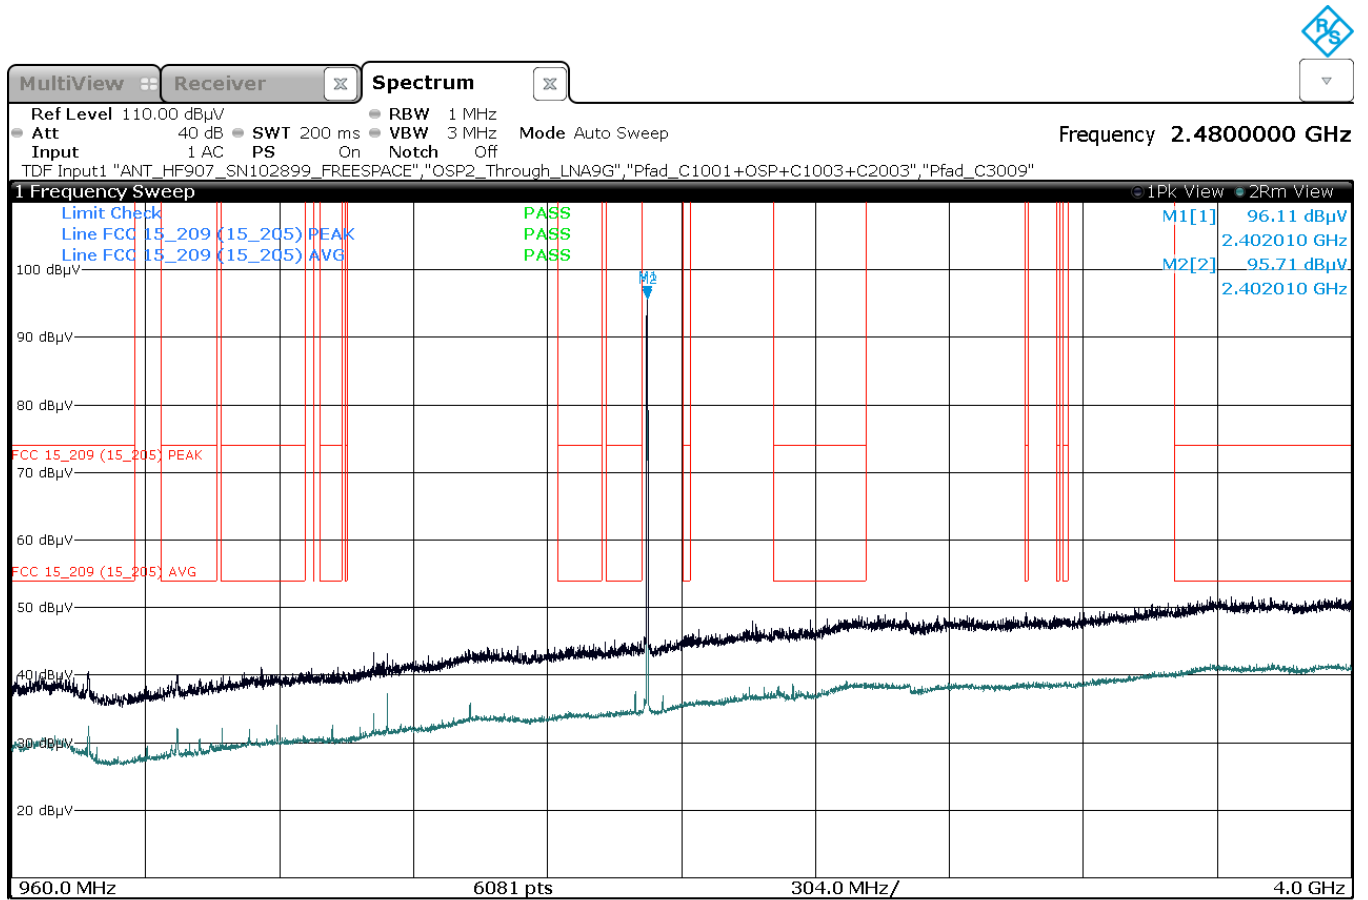

16:22:44 24.10.2021


Annex A of TR no.: 21086129-23008-1

Plot 29: Mode 1, RSE 1 GHz - 4 GHz, high channel, horizontal / vertical polarisation

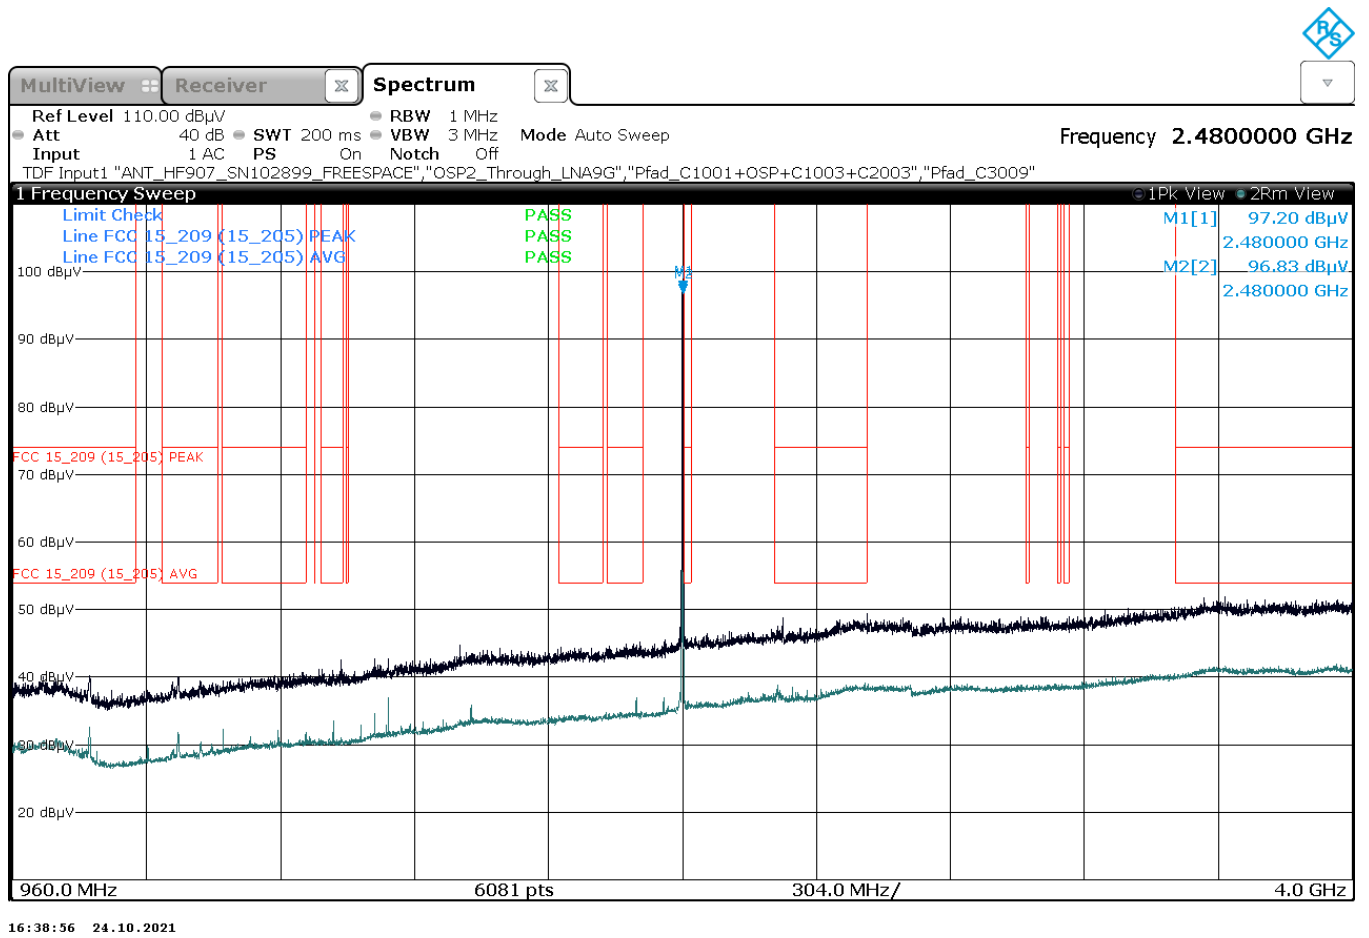


Annex A of TR no.: 21086129-23008-1

Plot 30: Mode 1, RSE 4 GHz – 9 GHz, low channel, horizontal / vertical polarisation

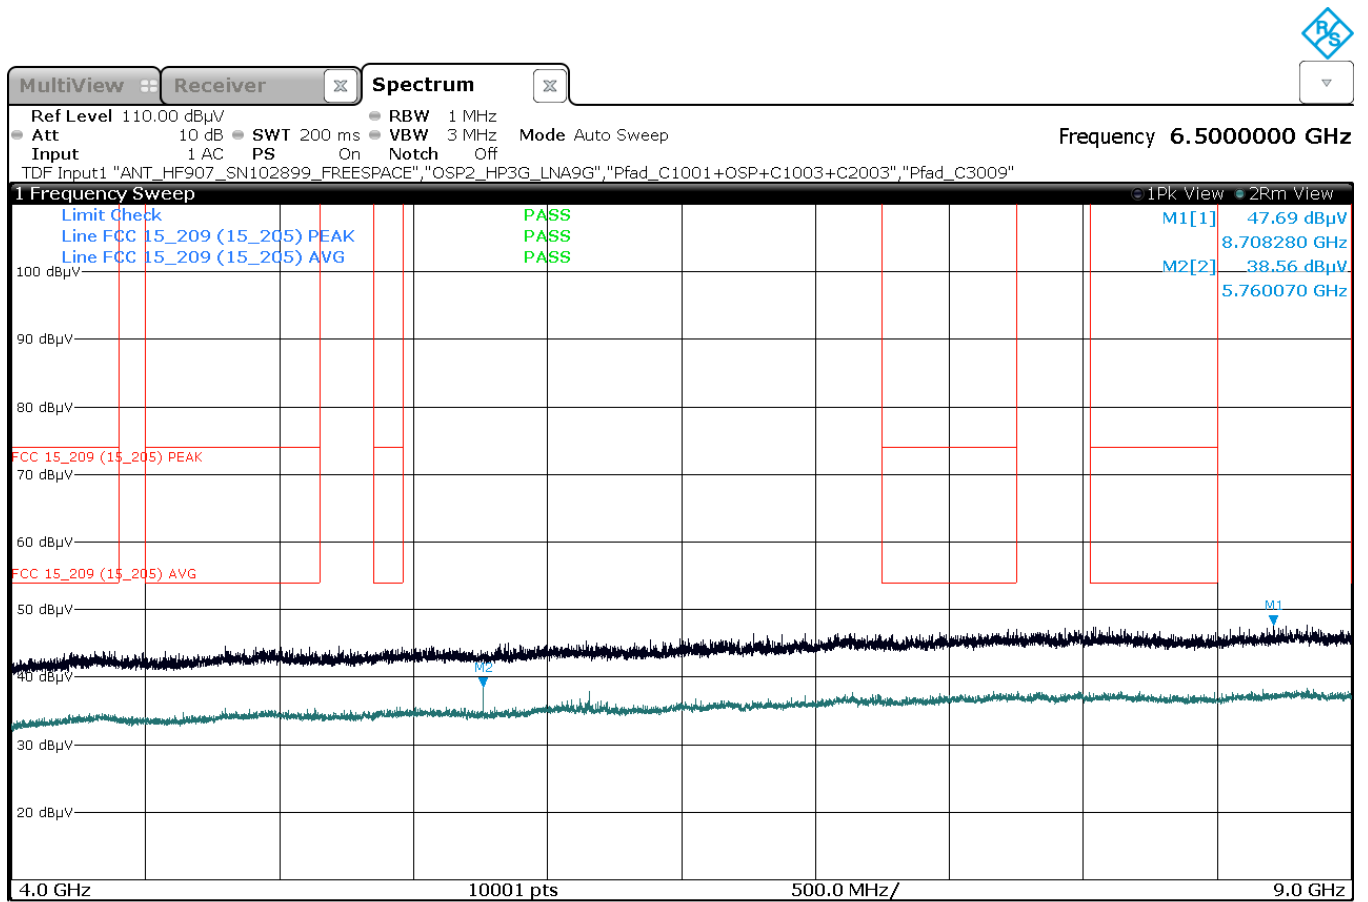

16:27:47 24.10.2021

Plot 31: Mode 1, RSE 4 GHz – 9 GHz, high channel, horizontal / vertical polarisation

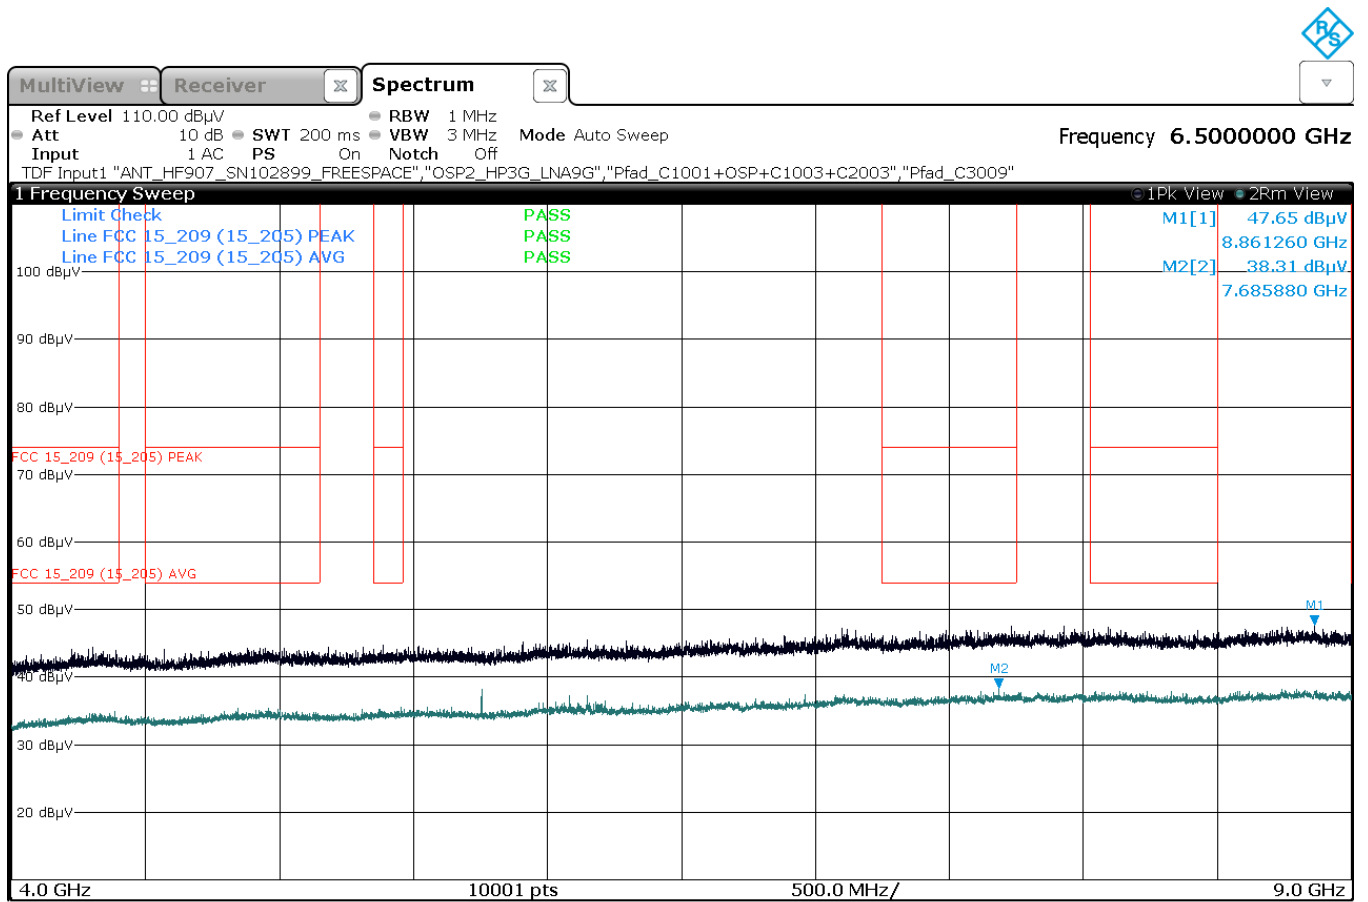

16:43:57 24.10.2021

## 2.3 Variant ID #39

### DUT Information

DUT Name: prePV 39  
 Manufacturer: Mitsubishi Electric Corporation  
 Serial Number: 65332 (conducted)  
 65334 (radiated)

#### 2.3.1 RF Output Power (Conducted Peak Power)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 11.9.2.3.2. Not mandatory.

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
 Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### DUT Information


DUT Name: prePV 39  
 Manufacturer: Mitsubishi Electric Corporation  
 Serial Number: 65332 (conducted)

Plot 32: Test Mode 1, GFSK, 1 Mbit/s, RF output power, low channel 0, 2402 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	-3.9	21.0	-3.9	46.212	PASS

Gated Trace

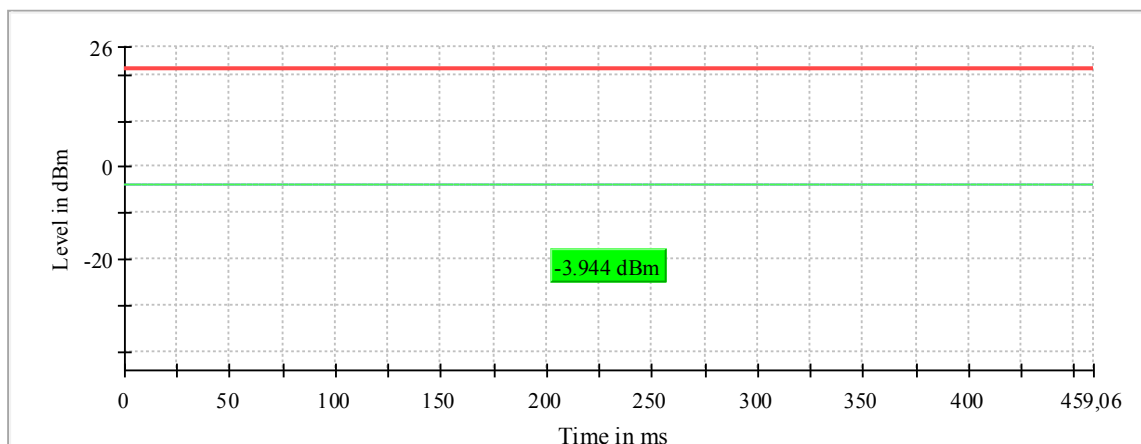


— Gated Trace — Overall — Limit

Plot 33: Test Mode 1, GFSK, 1 Mbit/s, RF output power, mid channel 39, 2441 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2441.000000	-3.1	21.0	-3.1	46.212	PASS

Gated Trace

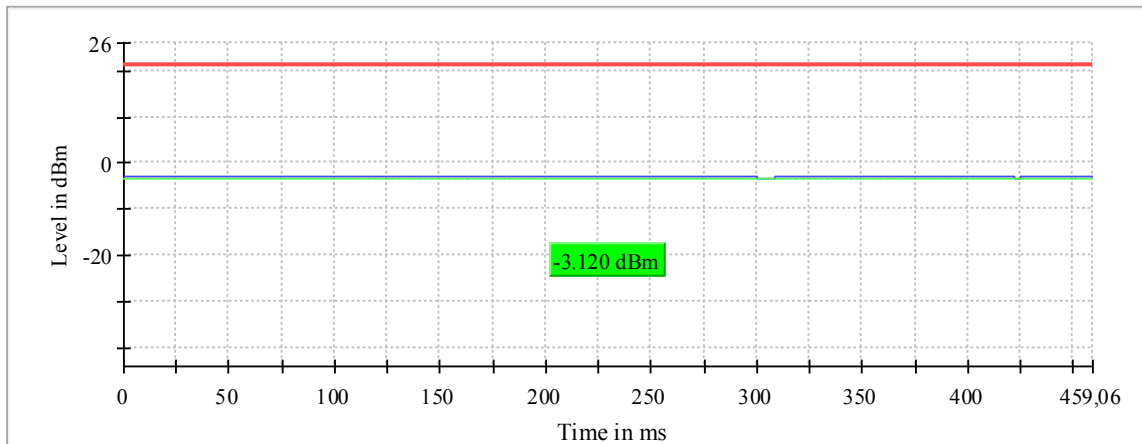


— Gated Trace — Overall — Limit

Plot 34: Test Mode 1, GFSK, 1 Mbit/s, RF output power, high channel 78, 2480 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	-3.5	21.0	-3.5	46.213	PASS

Gated Trace

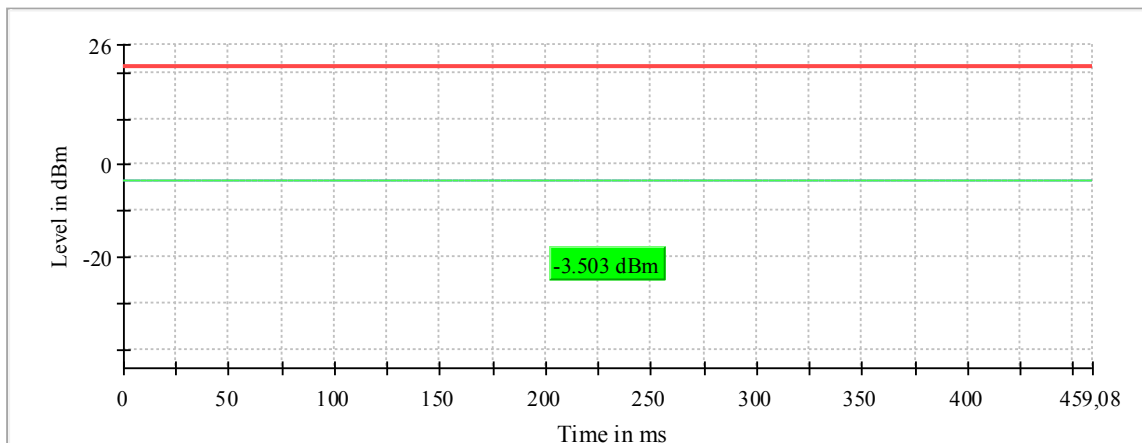

— Gated Trace — Overall — Limit




Annex A of TR no.: 21086129-23008-1

Plot 35: Test Mode 2,  $\uparrow$  /4-DQPSK, 2 Mbit/s, RF output power, low channel 0, 2402 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	-4.5	21.0	-4.5	46.247	PASS

Gated Trace

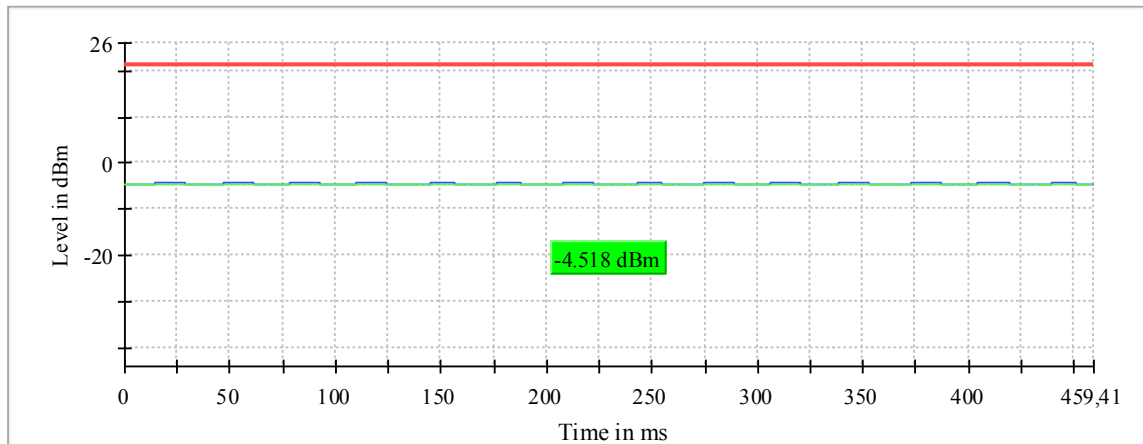


— Gated Trace — Overall — Limit

Plot 36: Test Mode 2,  $\uparrow$  /4-DQPSK, 2 Mbit/s, RF output power, mid channel 39, 2441 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2441.000000	-3.7	21.0	-3.7	46.249	PASS

Gated Trace

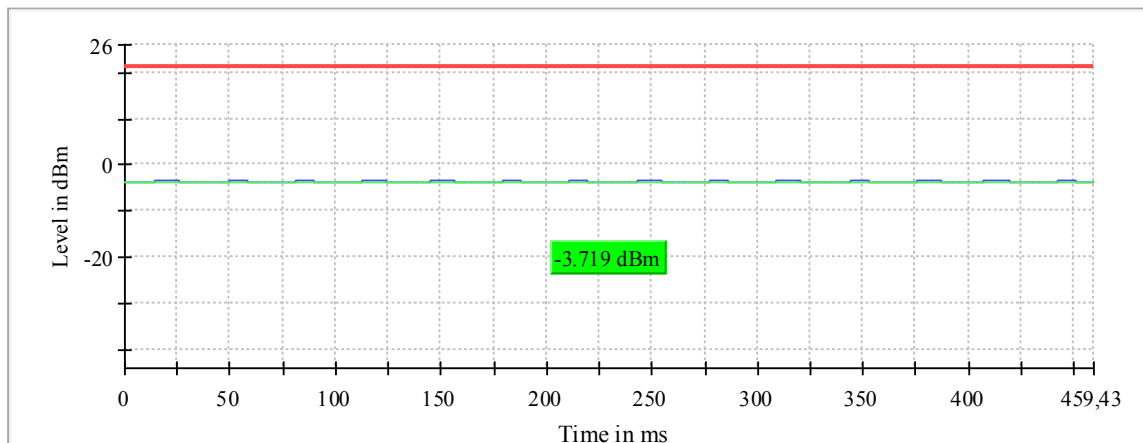

— Gated Trace — Overall — Limit


Annex A of TR no.: 21086129-23008-1

Plot 37: Test Mode 2,  $\pi/4$ -DQPSK, 2 Mbit/s, RF output power, high channel 78, 2480 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	-4.1	21.0	-4.1	46.251	PASS

Gated Trace

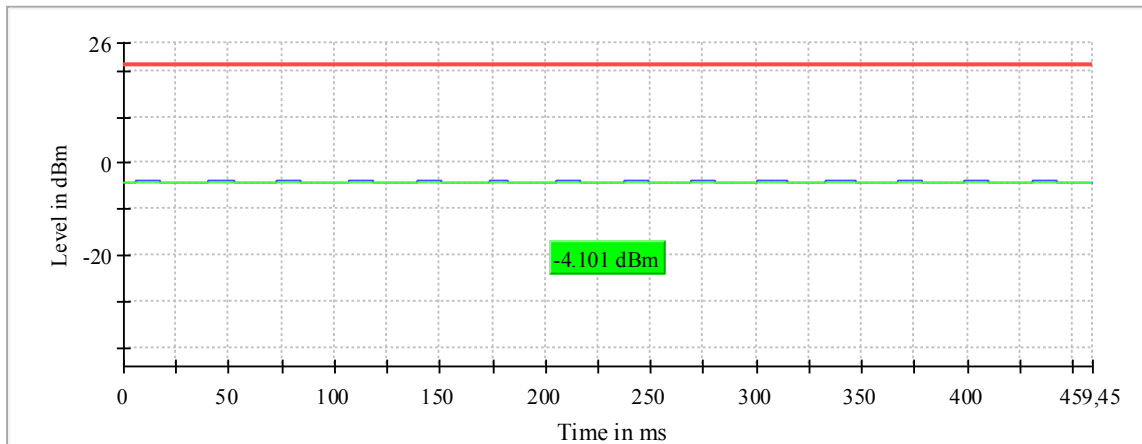


— Gated Trace — Overall — Limit

Plot 38: Test Mode 3, 8DPSK, 3 Mbit/s, RF output power, low channel 0, 2402 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	-4.5	21.0	-4.5	46.268	PASS

Gated Trace

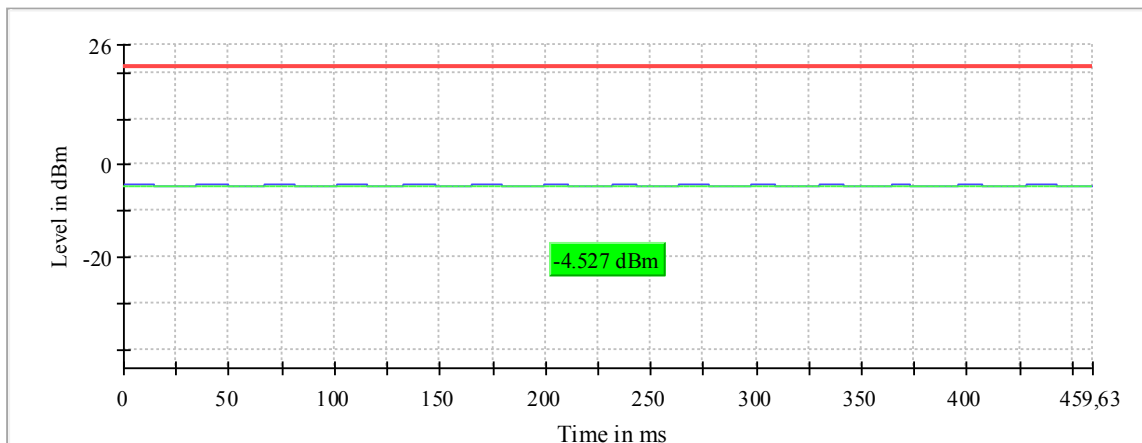


— Gated Trace — Overall — Limit

Plot 39: Test Mode 3, 8DPSK, 3 Mbit/s, RF output power, mid channel 39, 2441 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2441.000000	-3.7	21.0	-3.7	46.269	PASS

Gated Trace

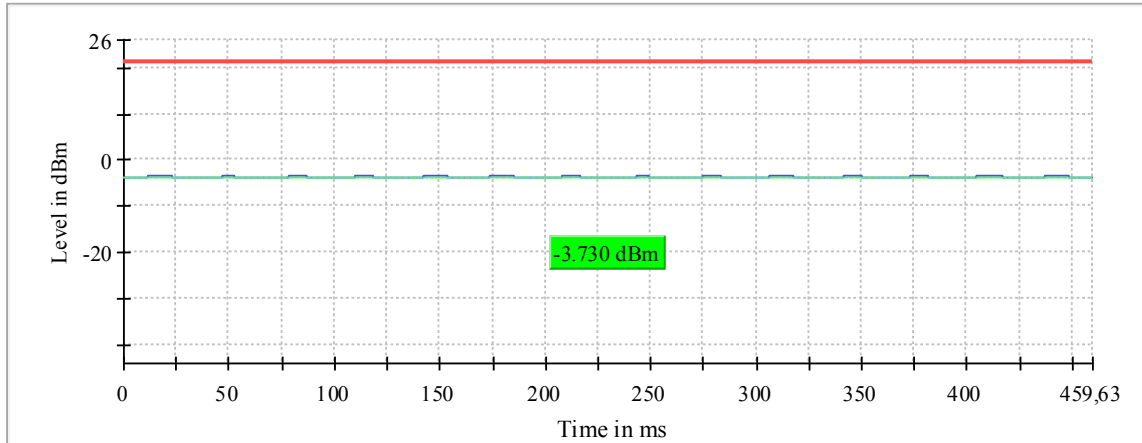


— Gated Trace — Overall — Limit

Plot 40: Test Mode 3, 8DPSK, 3 Mbit/s, RF output power, high channel 78, 2480 MHz

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	-4.1	21.0	-4.1	46.270	PASS

Gated Trace

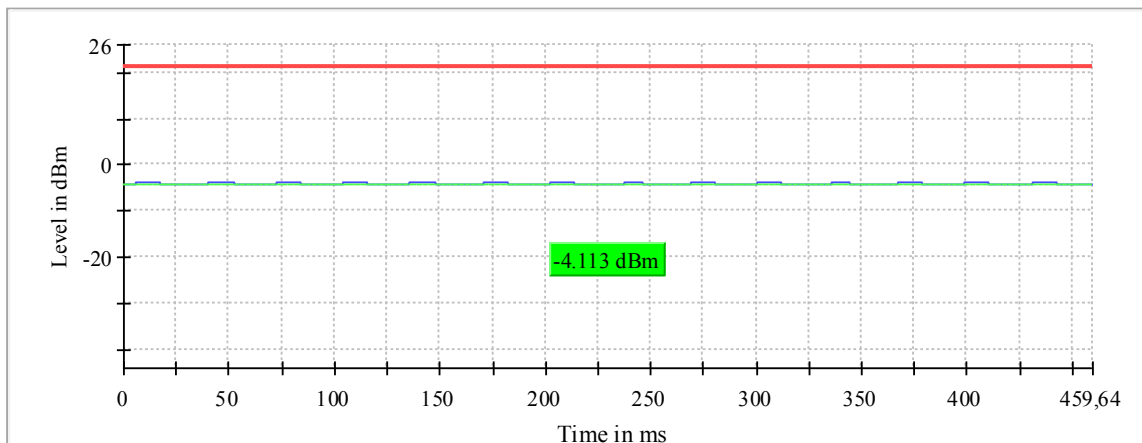


— Gated Trace — Overall — Limit

**2.3.2 Radiated Peak Power (Peak EIRP)**

**DUT Information**

DUT Name: prePV 39  
 Manufacturer: Mitsubishi Electric Corporation  
 Serial Number: 65334 (radiated)


Plot 41: Test Mode 1, GFSK, 1 Mbit/s, Peak EIRP, low channel 0, 2402 MHz

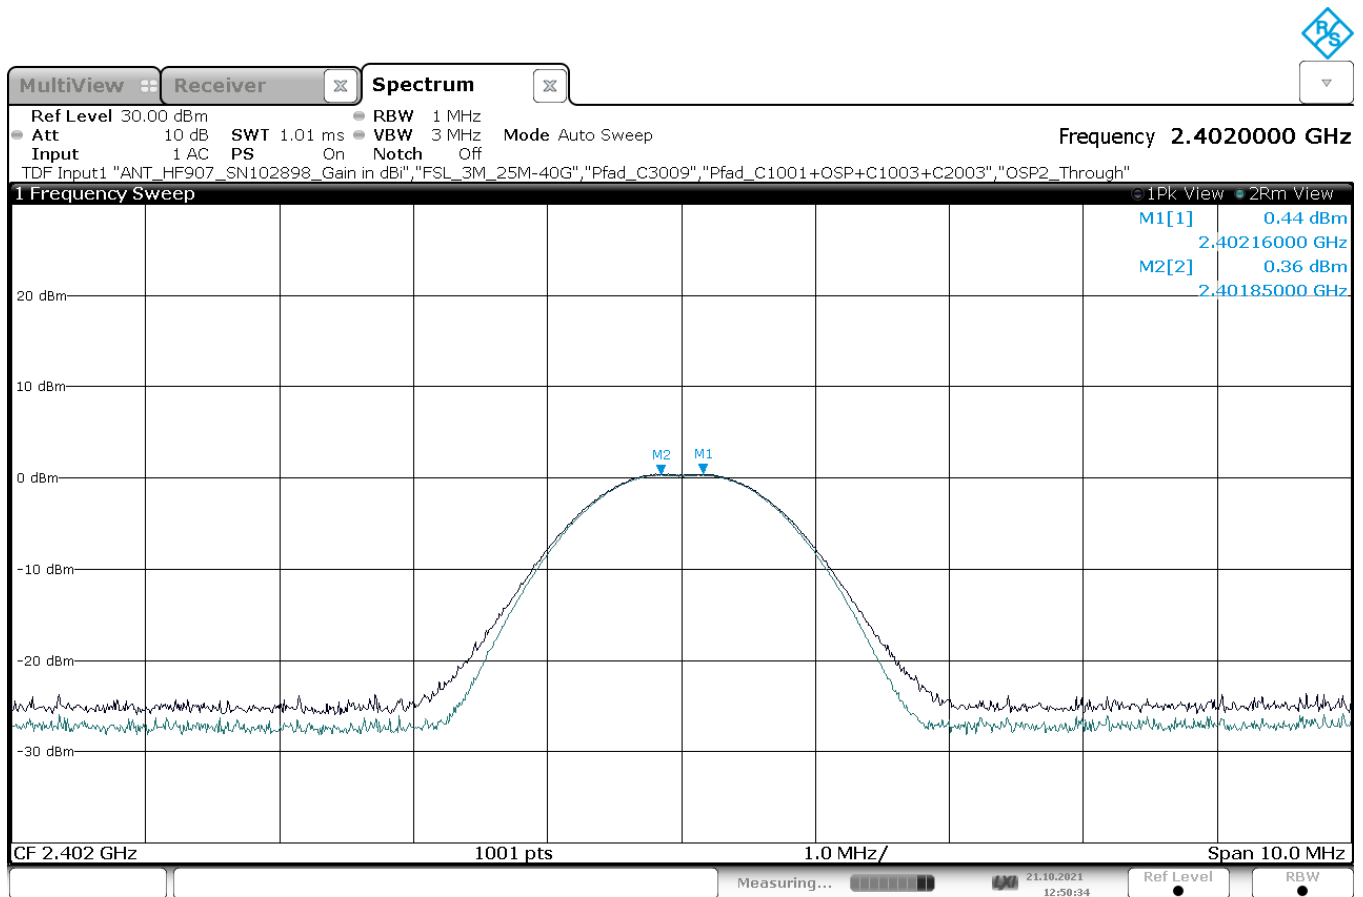

12:50:34 21.10.2021

Annex A of TR no.: 21086129-23008-1


Plot 42: Test Mode 1, GFSK, 1 Mbit/s, Peak EIRP, high channel 78, 2480 MHz

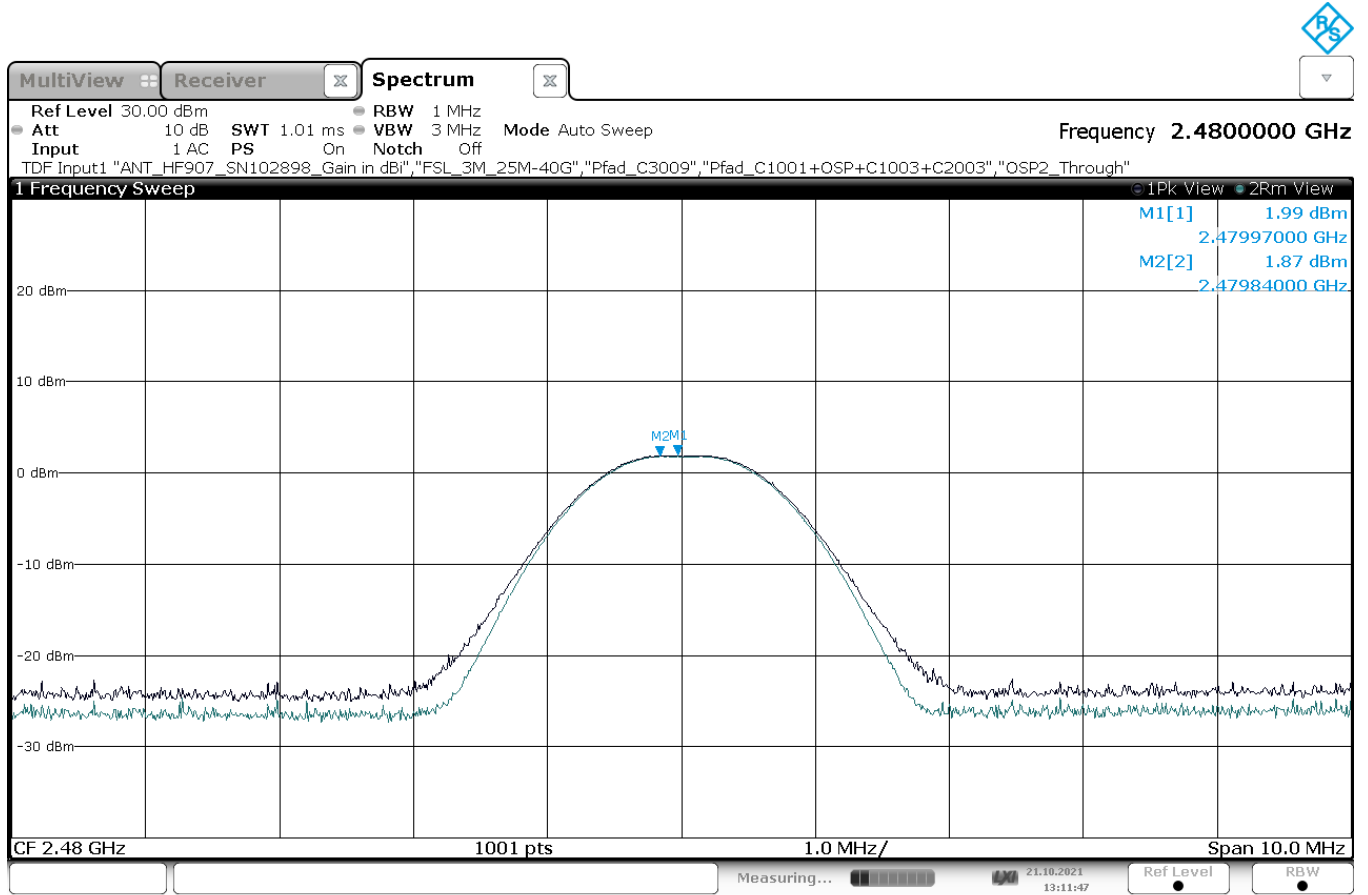

13:11:48 21.10.2021

**2.3.3 Band Edge Compliance (BEC), radiated**


Plot 43: Mode 1, BEC, low channel 0, 2402 MHz

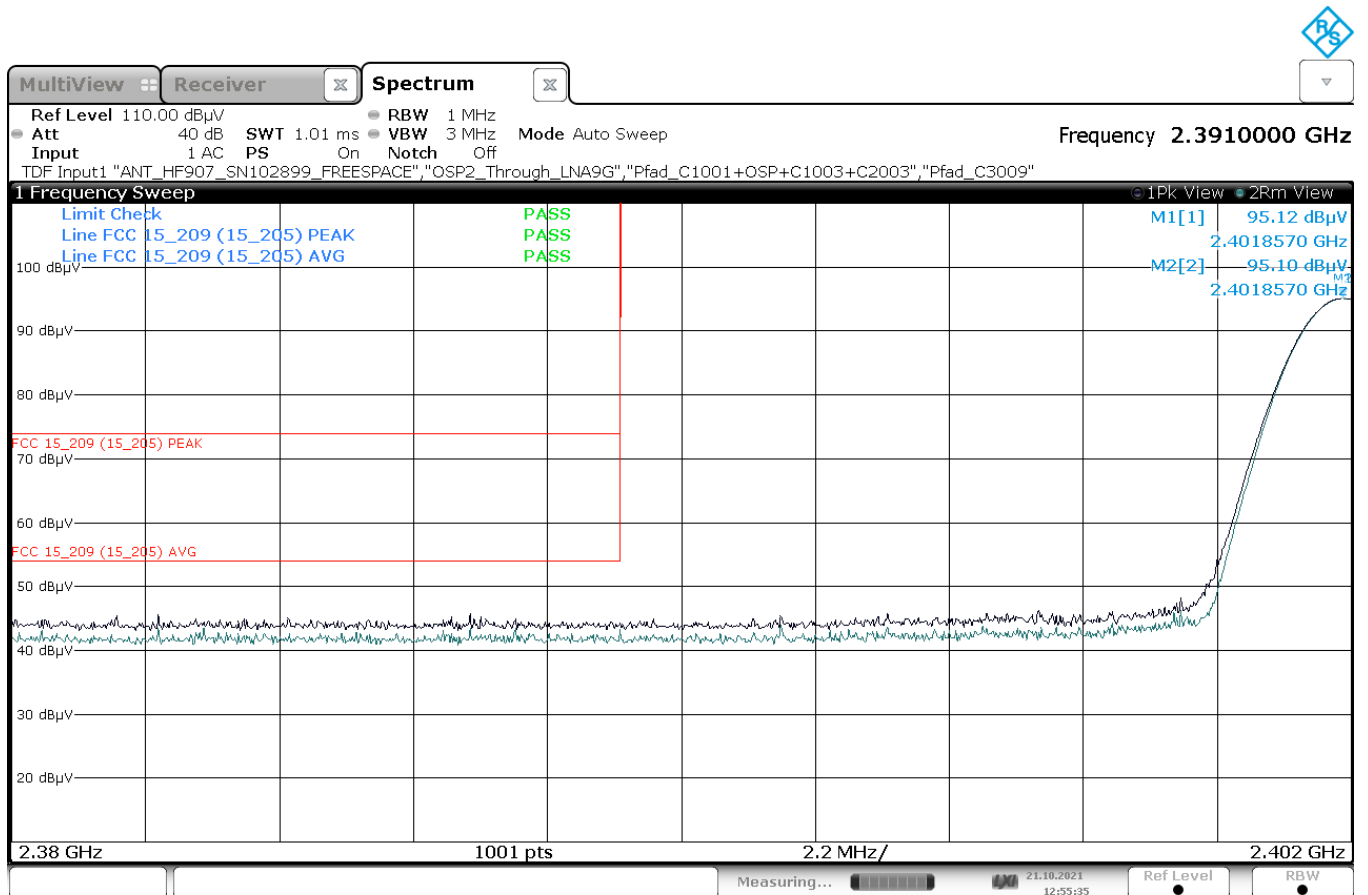

12:55:36 21.10.2021

Annex A of TR no.: 21086129-23008-1


Plot 44: Mode 1, BEC, high channel 78, 2480 MHz

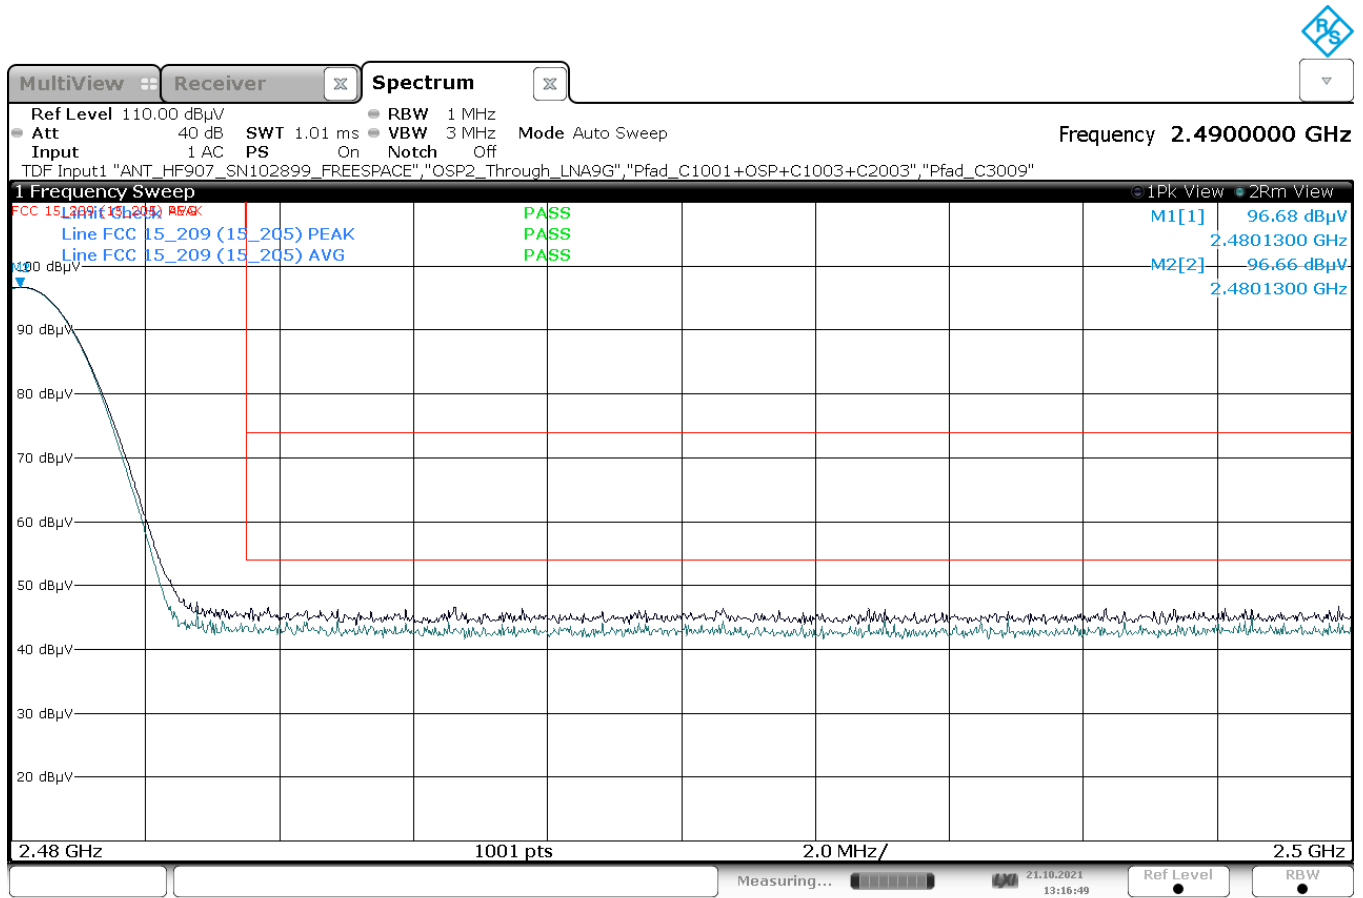

13:16:50 21.10.2021

**2.3.4 Radiated Spurious Emissions (RSE)**


Plot 45: Mode 1, RSE 9 kHz – 30 MHz, low channel, loop antenna

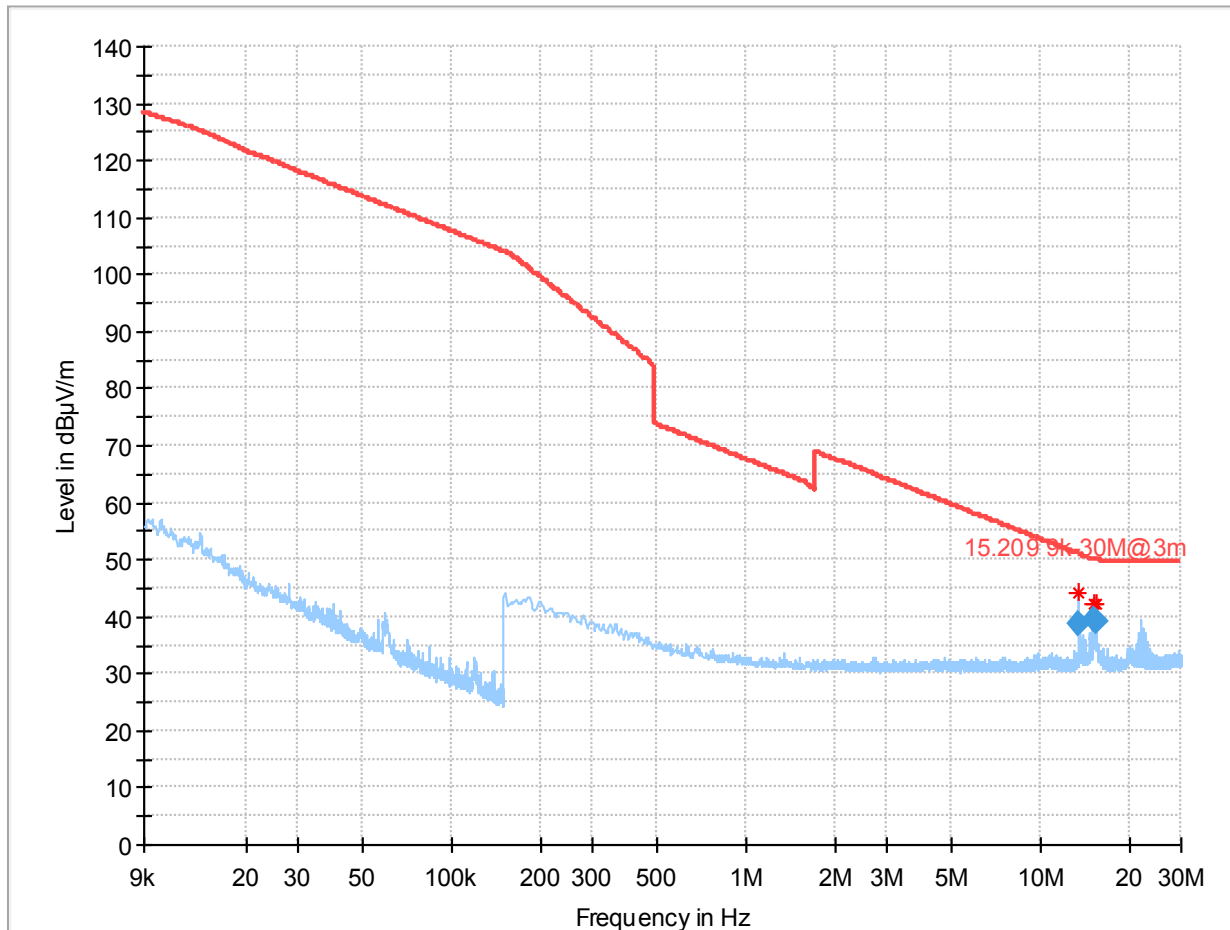

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	38.84	50.94	12.10	100.0	9.000	H	210.0	20.5
15.303750	39.46	50.04	10.58	100.0	9.000	V	300.0	20.5
15.549000	38.96	50.03	11.07	100.0	9.000	V	262.0	20.5




Plot 46: Mode 1, RSE 9 kHz – 30 MHz, high channel, loop antenna

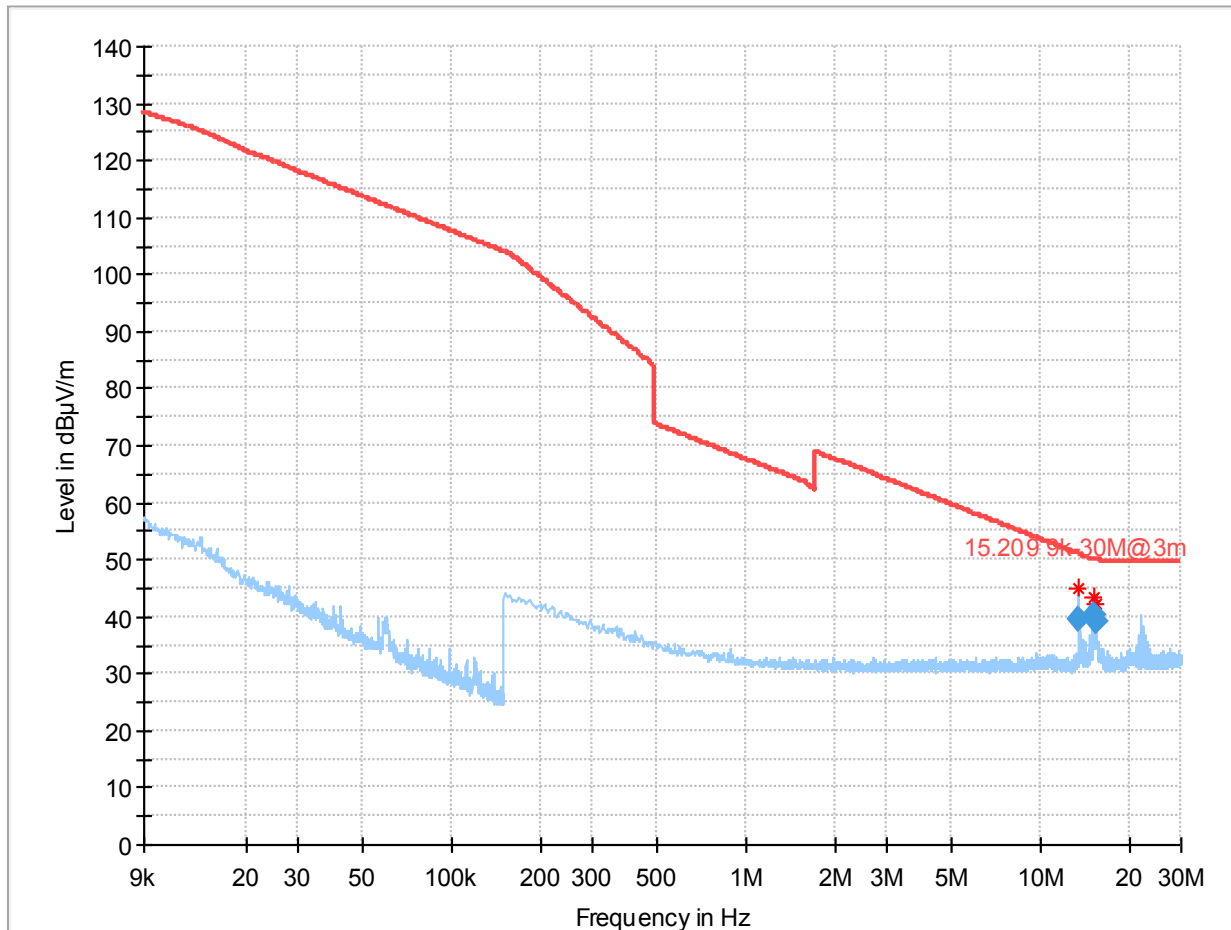


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	39.65	50.94	11.29	100.0	9.000	V	300.0	20.5
15.303750	40.17	50.04	9.87	100.0	9.000	V	300.0	20.5
15.553500	39.30	50.03	10.73	100.0	9.000	H	60.0	20.5

Plot 47: Mode 1, RSE 30 MHz – 1 GHz, low channel, horizontal / vertical polarisation

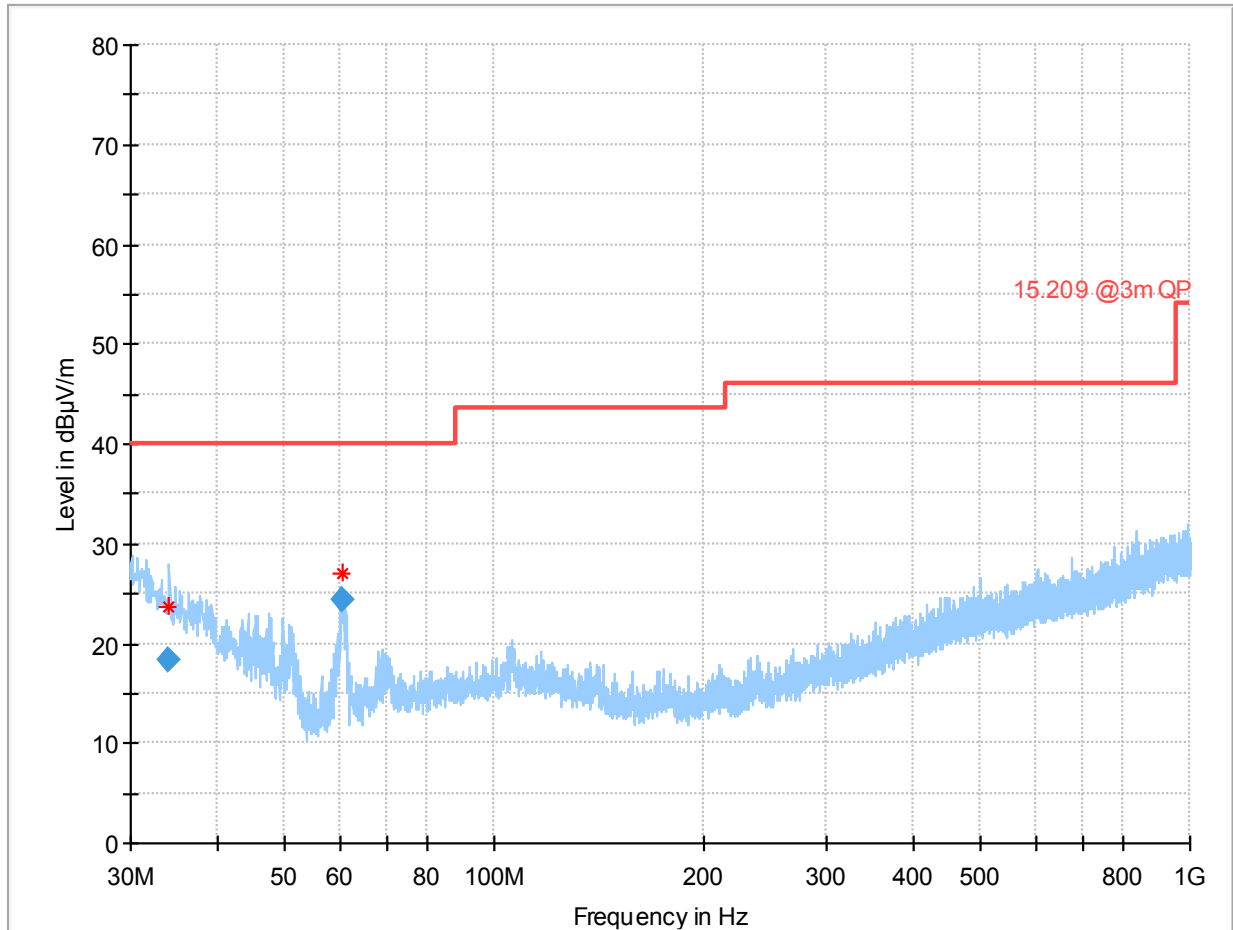


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
34.024000	18.43	40.00	21.57	100.0	120.000	350.0	H	47.0
60.417000	24.32	40.00	15.68	100.0	120.000	100.0	V	0.0

Plot 48: Mode 1, RSE 30 MHz – 1 GHz, high channel, horizontal / vertical polarisation

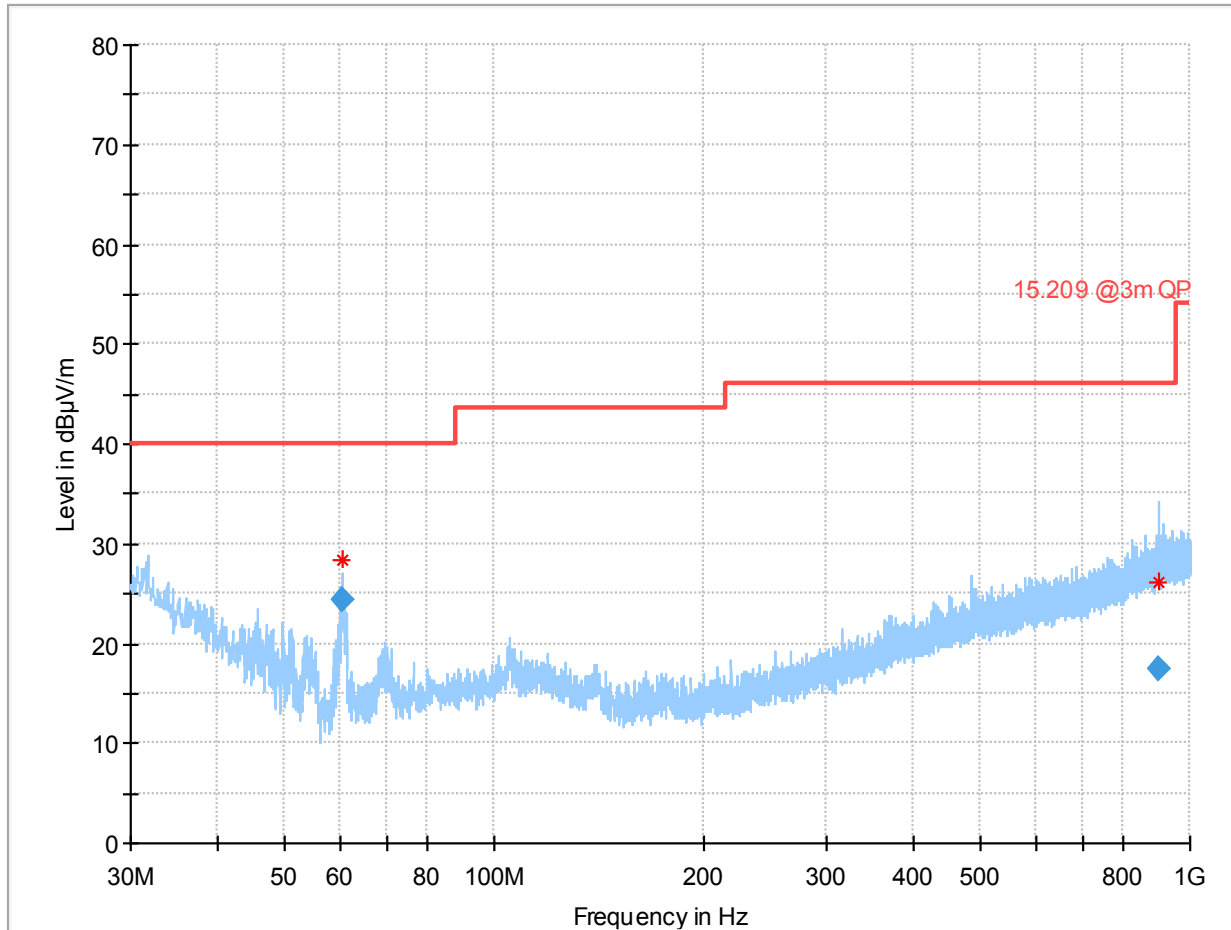

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
60.677000	24.40	40.00	15.60	100.0	120.000	103.0	V	-20.0
901.302500	17.40	46.00	28.60	100.0	120.000	271.0	V	322.0


Plot 49: Mode 1, RSE 1 GHz - 4 GHz, low channel, horizontal / vertical polarisation

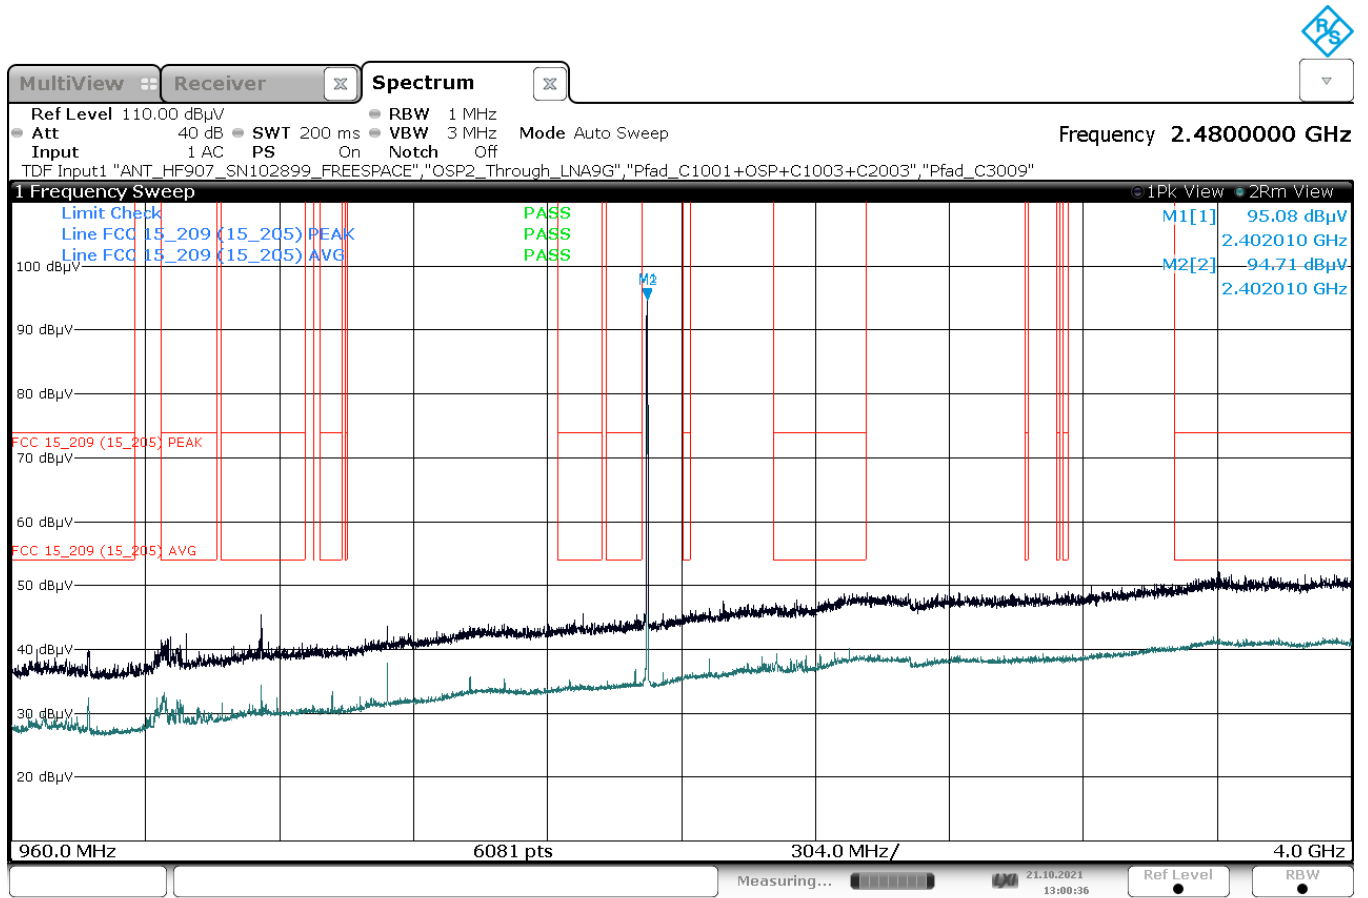

13:00:36 21.10.2021


Annex A of TR no.: 21086129-23008-1

Plot 50: Mode 1, RSE 1 GHz - 4 GHz, high channel, horizontal / vertical polarisation

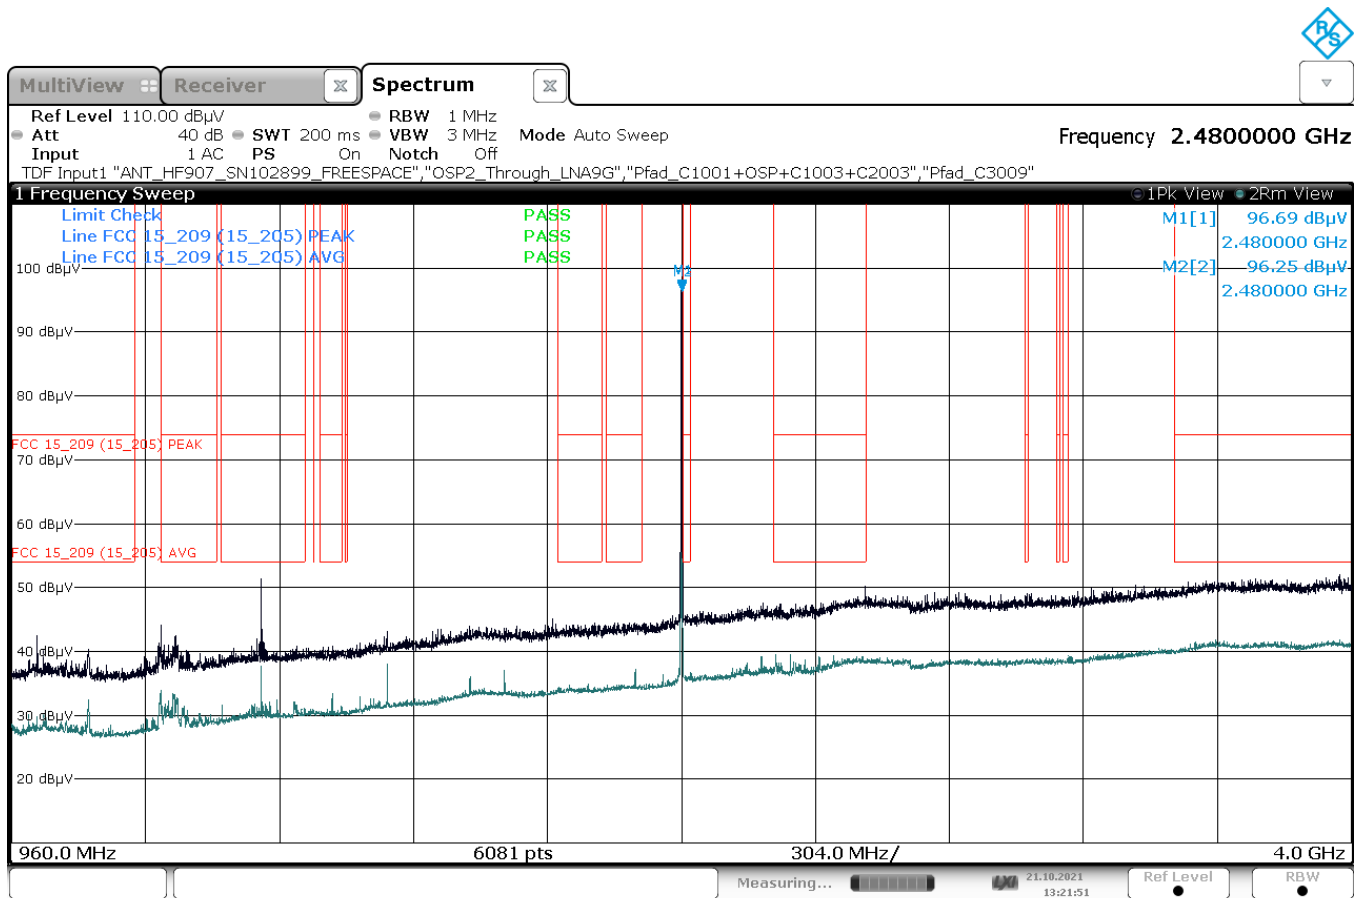


13:21:51 21.10.2021

Plot 51: Mode 1, RSE 4 GHz – 9 GHz, low channel, horizontal / vertical polarisation

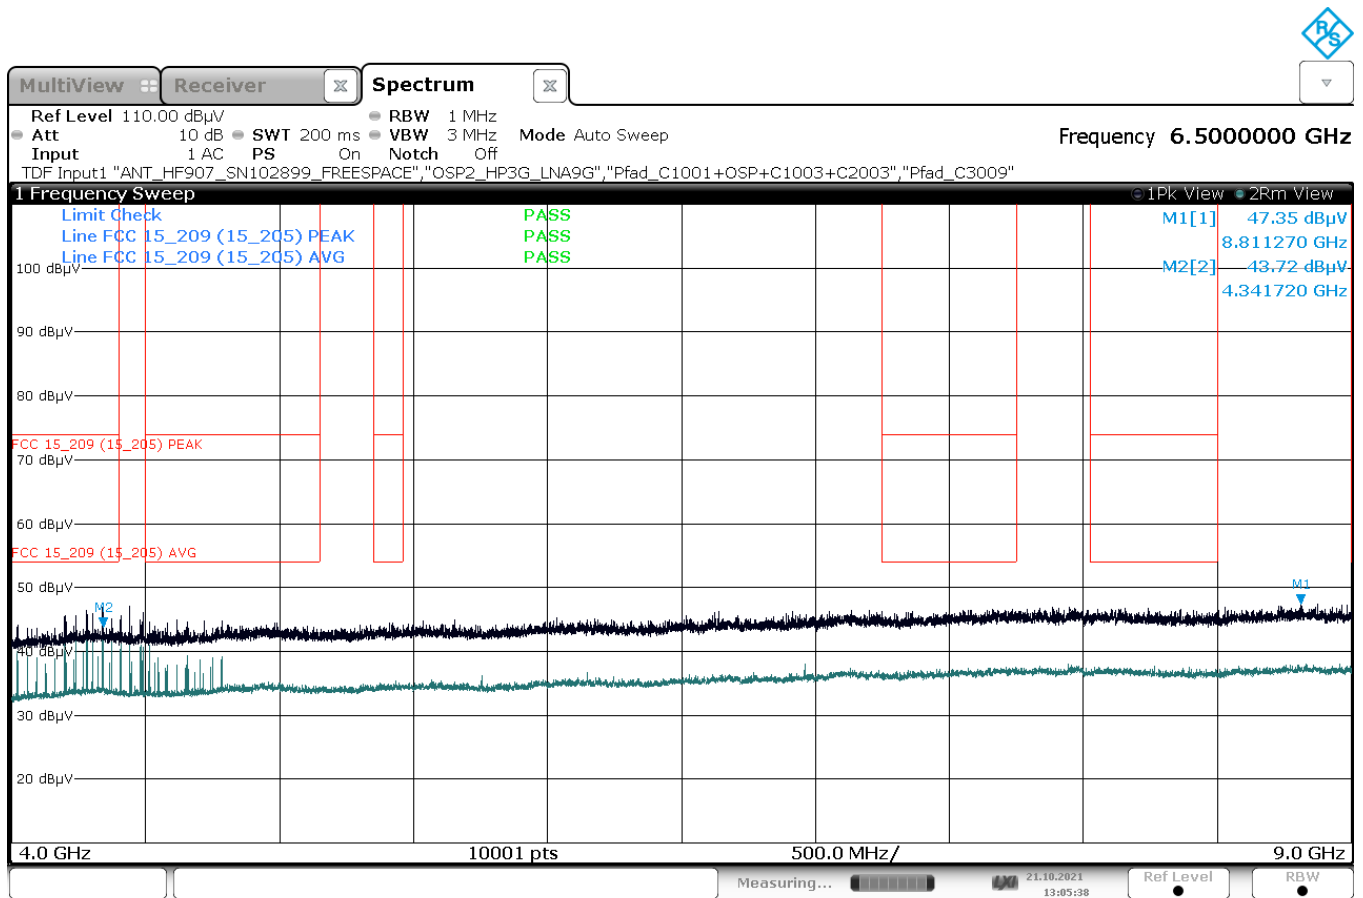

13:05:38 21.10.2021

Plot 52: Mode 1, RSE 4 GHz – 9 GHz, high channel, horizontal / vertical polarisation

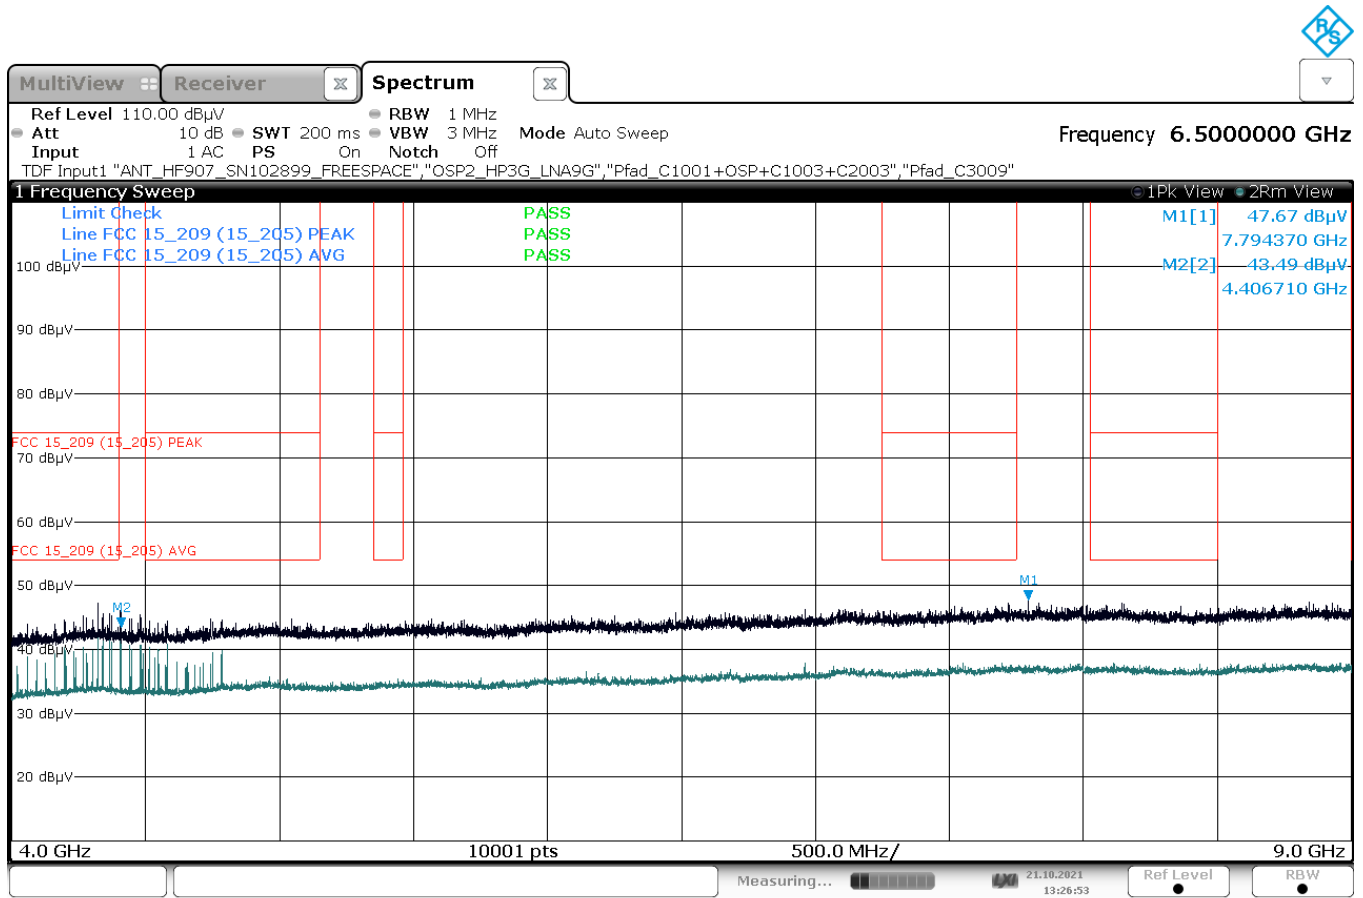

13:26:53 21.10.2021

## 2.4 Variant ID #43

### DUT Information

DUT Name:	prePV 43
Manufacturer:	Mitsubishi Electric Corporation
Serial Number:	66704 (radiated)

#### 2.4.1 RF Output Power (Conducted Peak Power)

See test results of R1LOW-R-SBM DV model (see IBL-Lab test report TR-21065785-20823)


#### 2.4.2 Radiated Peak Power (Peak EIRP)

See test results of R1LOW-R-SBM DV model (see IBL-Lab test report TR-21065785-20823)



**2.4.3 Band Edge Compliance (BEC), radiated**


Plot 53: Mode 1, BEC, low channel 0, 2402 MHz

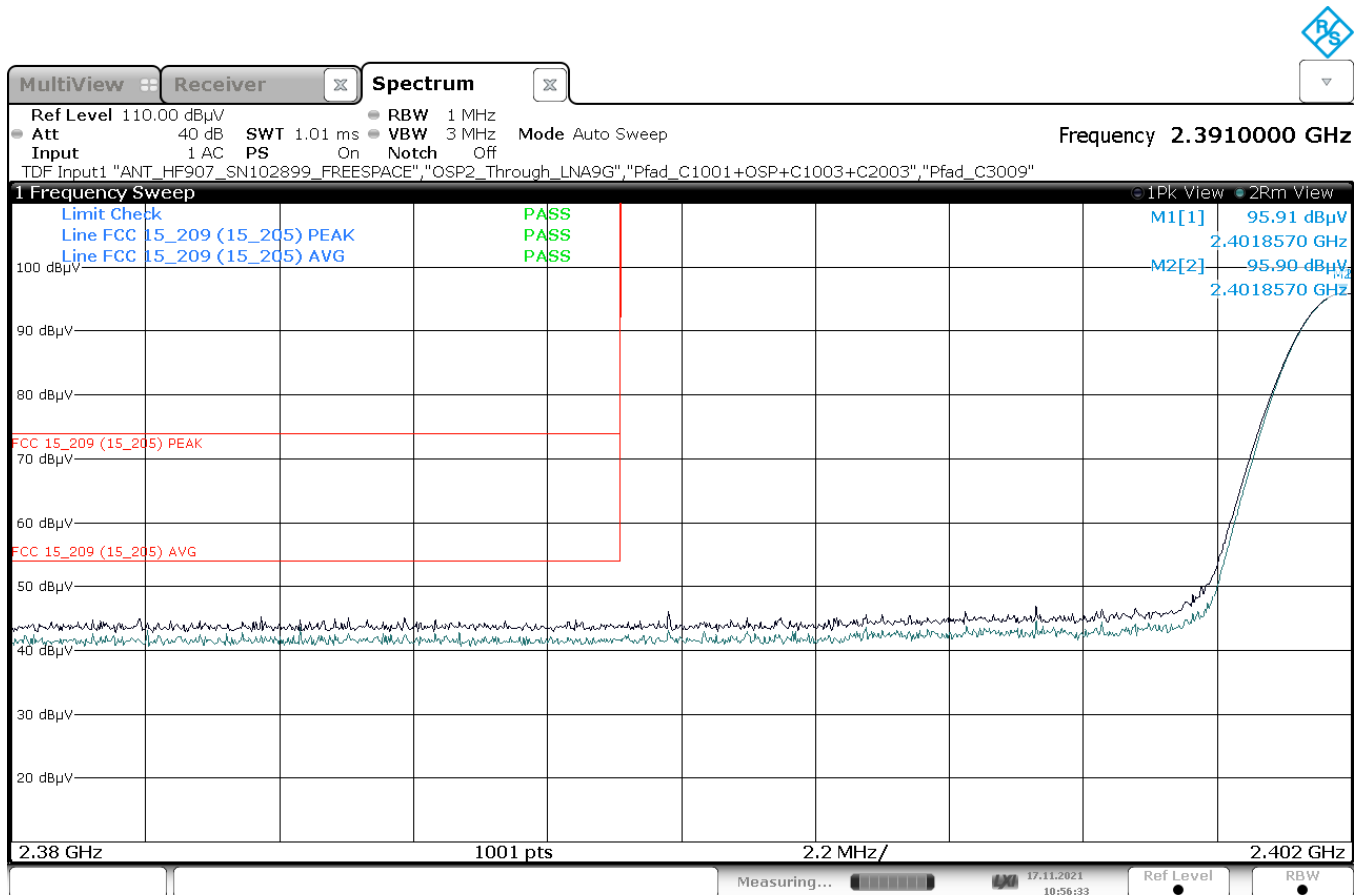

10:56:33 17.11.2021

Annex A of TR no.: 21086129-23008-1


Plot 54: Mode 1, BEC, high channel 78, 2480 MHz

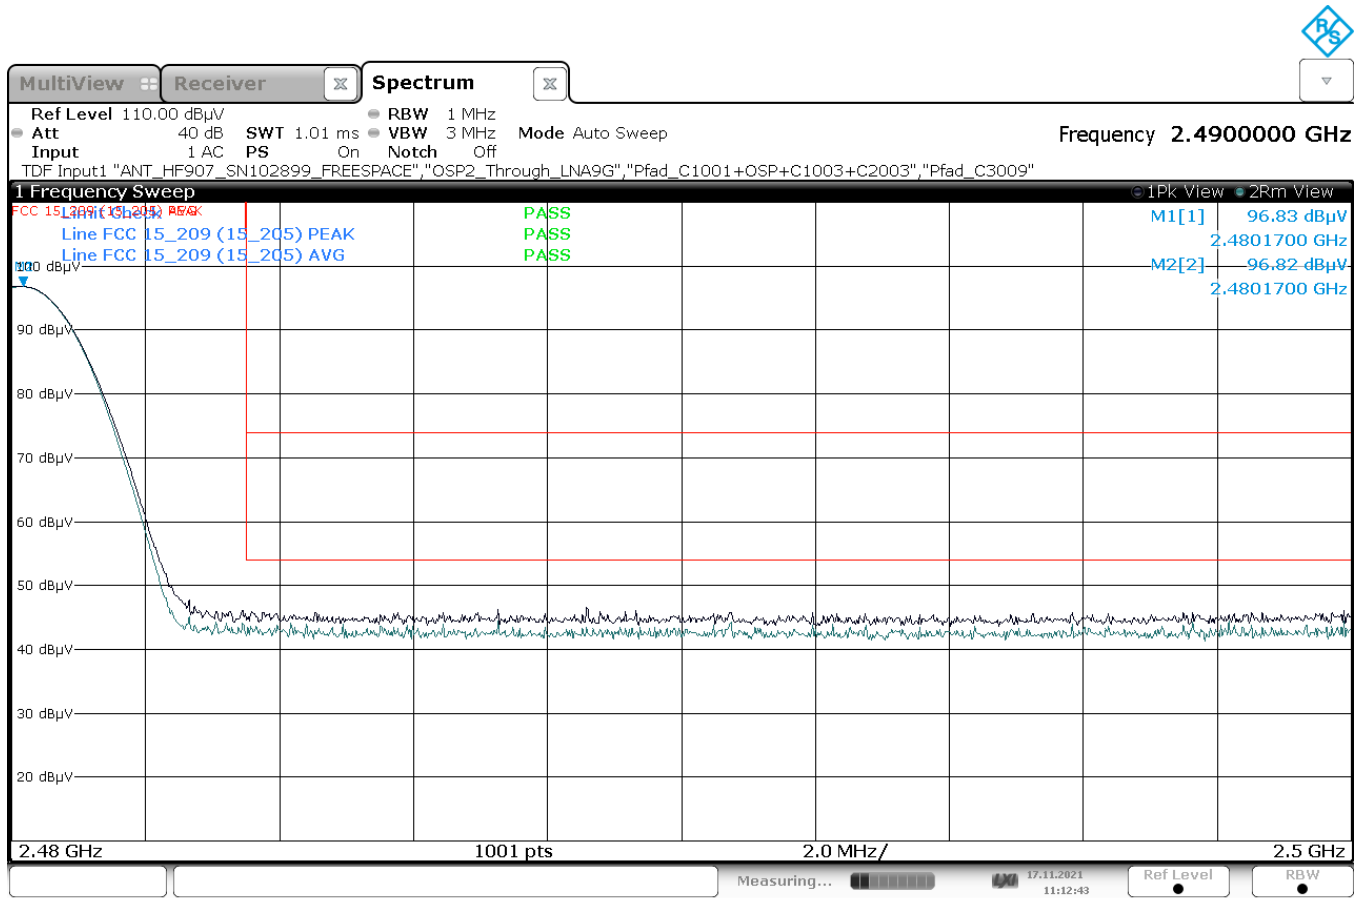

11:12:43 17.11.2021

**2.4.4 Radiated Spurious Emissions (RSE)**

Plot 55: Mode 1, RSE 9 kHz – 30 MHz, low channel, loop antenna

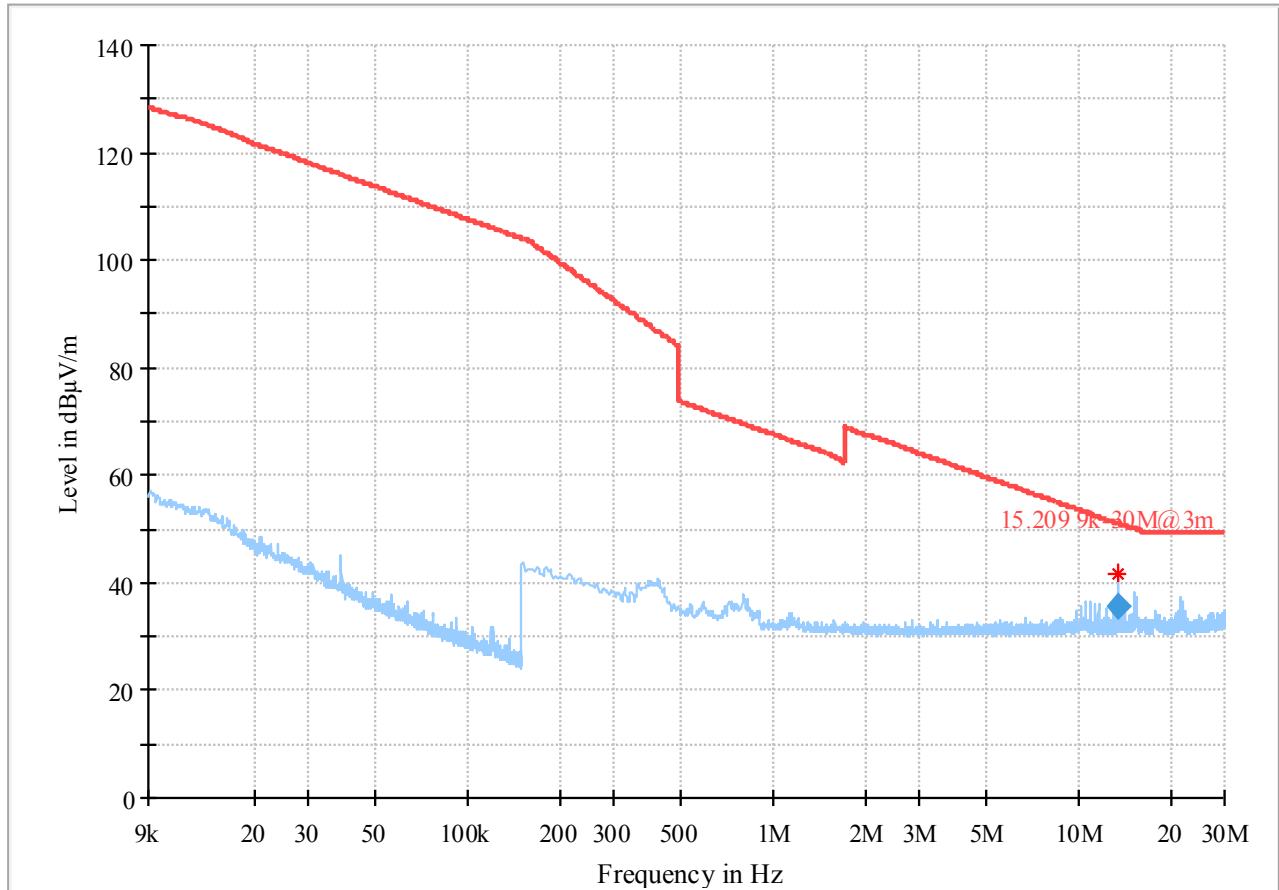

— Preview Result 1-PK+      \* Critical\_Freqs PK+  
— 15.209 9k-30M@3m      ◆ Final\_Result QPK


**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	35.63	50.94	15.31	100.0	9.000	V	75.0	20.5

(continuation of the "Final\_Result" table from column 15 ...)

Frequency (MHz)	Comment
13.560000	15:12:43 - 18.11.2021

Plot 56: Mode 1, RSE 9 kHz – 30 MHz, high channel, loop antenna

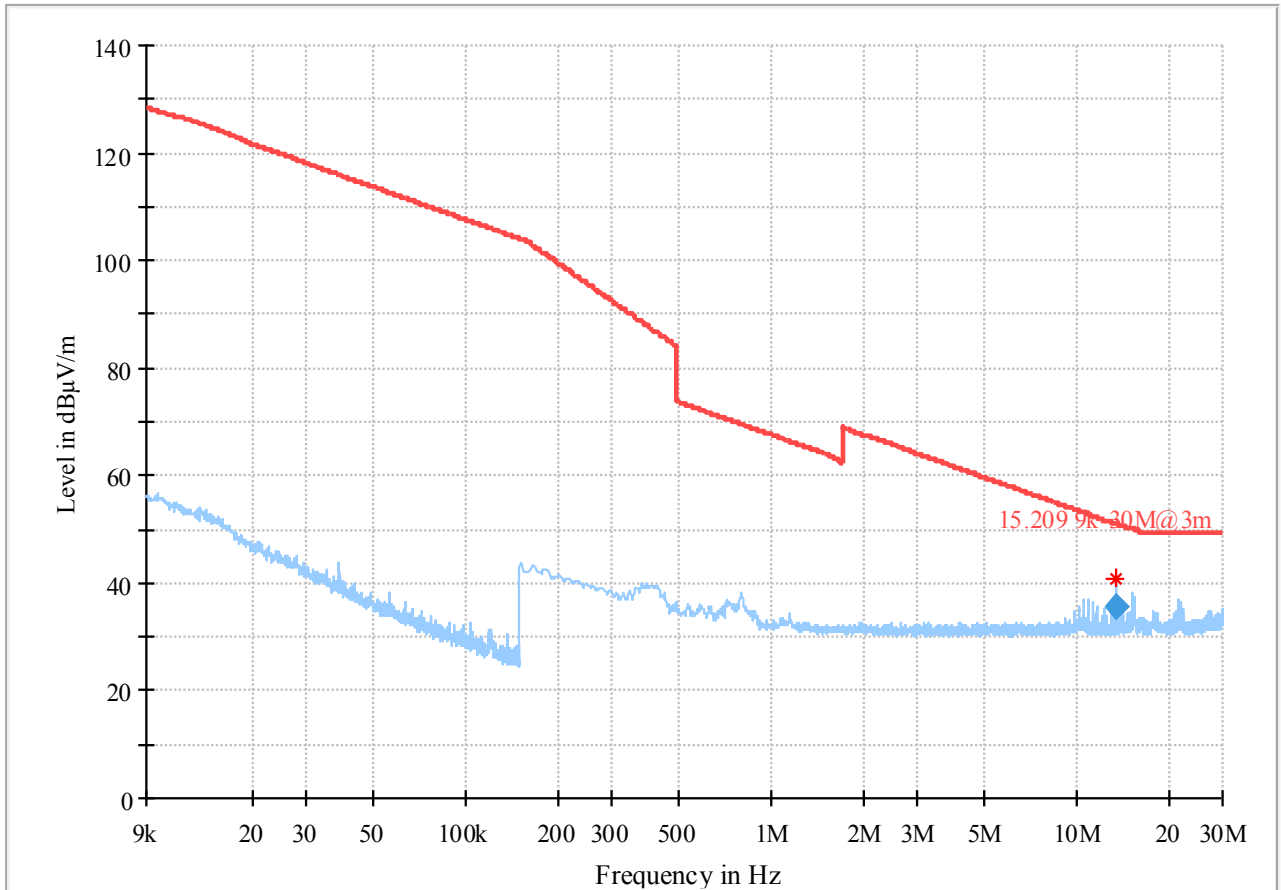

— Preview Result 1-PK+      \* Critical\_Freqs PK+  
— 15.209 9k-30M@3m      ◆ Final\_Result QPK

### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB/m)
13.560000	35.48	50.94	15.46	100.0	9.000	V	111.0	20.5

(continuation of the "Final\_Result" table from column 15 ...)

Frequency (MHz)	Comment
13.560000	15:25:11 - 18.11.2021