

RADIO TEST REPORT

Test Report No. 15398171H-A-R2

Customer	MITSUBISHI ELECTRIC MOBILITY CORPORATION
Description of EUT	Remote Parking Keyless System LFU
Model Number of EUT	SKE114-02
FCC ID	UJHSKE11402
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	February 20, 2025
Remarks	-

Representative test engineer

Junki Nagatomi
Engineer

Approved by

Akihiko Maeda
Leader



CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 24.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 15398171H-A

This report is a revised version of 15398171H-A-R1. 15398171H-A-R1 is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15398171H-A	November 27, 2024	-
1	15398171H-A-R1	January 31, 2025	Addition of the note *1) in SECTION 1
2	15398171H-A-R2	February 20, 2025	Changes the following information for the equipment list in APPENDIX 2; deletion: LIMS ID: 142036 addition: LIMS ID: 146613

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information.....	5
SECTION 2: Equipment Under Test (EUT)	5
SECTION 3: Test specification, procedures & results	6
SECTION 4: Operation of EUT during testing.....	9
SECTION 5: Radiated emission (Fundamental and Spurious Emission).....	11
SECTION 6: -20 dB Bandwidth.....	13
SECTION 7: 99 % emission bandwidth	13
APPENDIX 1: Test data	14
Radiated Emission (Fundamental and Spurious Emission)	14
-20 dB Bandwidth / 99 % emission bandwidth	25
APPENDIX 2: Test instruments	35
APPENDIX 3: Photographs of test setup.....	36
Radiated Emission	36
Worst Case Position	37

SECTION 1: Customer Information

Company Name	mitsubishi electric mobility corporation
Address	840, Chiyoda-machi, Himeji, Hyogo, 670-8677, Japan ^{*1)}
Telephone Number	+81-79-298-8994 ^{*1)}
Contact Person	Masashi Nojima ^{*1)}

*1) The Grantee address, Telephone Number and Contact Person in the FCC application are “2-3-33, Miwa, Sanda-city, Hyogo, 669-1513 Japan”, “+81-79-559-3505” and “Koichi Kuriyama”.

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Remote Parking Keyless System LFU
Model Number	SKE114-02
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	July 22, 2024
Test Date	July 23 to November 5, 2024

2.2 Product Description

General Specification

Rating	DC 12.0 V
Operating temperature	-40 deg. C to 85 deg. C

Radio Specification

Radio Type	Transmitter
Frequency of Operation	125 kHz
Modulation	ASK

Remote Parking Keyless System LFU (model: SKE114-02) consists of the following parts:

- RPC System LFU
- LF Antenna (Door)
- LF Antenna (Room)
- Antenna coil (Immobilizer)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.209 Radiated emission limits; general requirements.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 8.8	<FCC> Section 15.207 <ISED> RSS-Gen 8.8	N/A	N/A	*1)
Electric Field Strength of Fundamental Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 6.5, 6.12	<FCC> Section 15.209 <ISED> RSS-210 8.2 RSS-Gen 8.9	2.1 dB 125 kHz, 0 deg. Peak with Duty factor (Mode 9)	Complied	Radiated
Electric Field Strength of Spurious Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> RSS-Gen 6.5, 6.6, 6.13	<FCC> Section 15.209 <ISED> RSS-210 8.3 RSS-Gen 8.9	3.0 dB 180.032 MHz, Vertical, QP (Mode 5)	Complied	Radiated
-20 dB Bandwidth	<FCC> ANSI C63.10:2013 6 Standard test methods <ISED> -	<FCC> Reference data <ISED> -	N/A	Complied	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

FCC Part 15.31 (e)

The battery voltage (DC 12 V) is provided to the EUT. Input voltage to RF part does not go through the regulator. So the test was performed with the supply voltage varied between 85 % and 115% of the nominal rated supply voltage (DC 12 V) and the variation of the input power does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the vehicle.

Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % emission bandwidth	RSS-Gen 6.7	-	N/A	-	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range		Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz		dB	3.3
10 m			dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	dB	5.0
		Vertical	dB	5.0
	200 MHz to 1000 MHz	Horizontal	dB	5.2
		Vertical	dB	6.2
10 m	30 MHz to 200 MHz	Horizontal	dB	5.5
		Vertical	dB	5.4
	200 MHz to 1000 MHz	Horizontal	dB	5.5
		Vertical	dB	5.5

-20 dB Bandwidth and 99% Occupied Bandwidth

Item	Unit	Calculated Uncertainty (+/-)
Bandwidth (OBW)	%	0.96

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.


SECTION 4: Operation of EUT during testing

4.1. Operating Mode(s)

Test mode	Remarks
1) Tx 125 kHz, Antenna - FL	-
2) Tx 125 kHz, Antenna - FR	-
3) Tx 125 kHz, Antenna - PFL	-
4) Tx 125 kHz, Antenna - PFR	-
5) Tx 125 kHz, Antenna - PRL	-
6) Tx 125 kHz, Antenna - PRR	-
7) Tx 125 kHz, Antenna - IF	-
8) Tx 125 kHz, Antenna - IR	-
9) Tx 125 kHz, Antenna - BP	-
10) Tx 125 kHz, Antenna - Coil*1)	-
*Power of the EUT was set by the software as follows; Software: DZ112311 (Date: 2024.05.07, Storage location: EUT memory) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product. Justification: The system was configured in typical fashion (as a user would normally use it) for testing.	

*1) This EUT has two modes which transponder key is attached or not. The worst case was confirmed with and without transponder key attached, as a result, the test without transponder key attached was the worst case. Therefore the test without transponder key attached was performed only.

4.2 Configuration and Peripherals

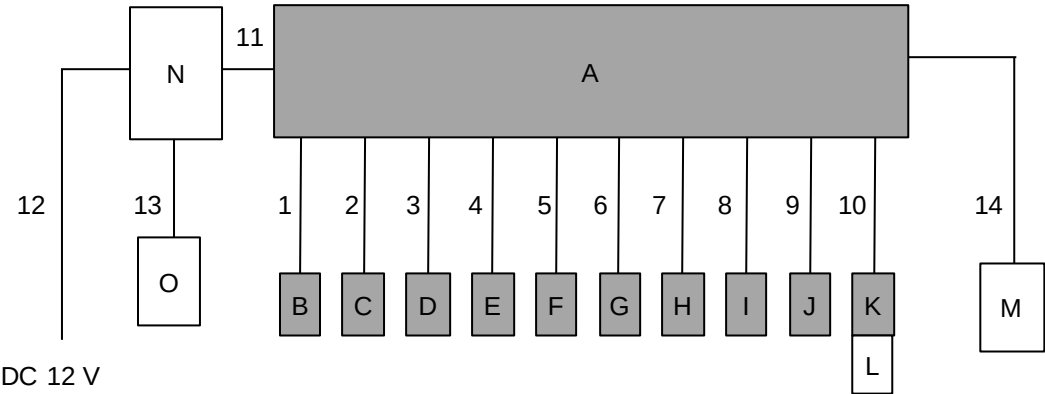

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.
* The EUT does not transmit simultaneously from two antennas.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remark
A	RPC System LFU	SKE114-02	20240718-L1 (No.1)	mitsubishi electric mobility corporation	EUT
B	LF Antenna (Door)	ANT-FL	B0J9-676N1-A (No.1)	-	EUT
C	LF Antenna (Door)	ANT-FR	B0J8-676N1-A (No.1)	-	EUT
D	LF Antenna (Room)	ANT-PFL	X001T60771 (No.1)	mitsubishi electric mobility corporation	EUT
E	LF Antenna (Room)	ANT-PFR	X001T60771 (No.1)	mitsubishi electric mobility corporation	EUT
F	LF Antenna (Room)	ANT-PRL	X001T60771 (No.1)	mitsubishi electric mobility corporation	EUT
G	LF Antenna (Room)	ANT-PRR	X001T60771 (No.1)	mitsubishi electric mobility corporation	EUT
H	LF Antenna (Room)	ANT-IF	X001T60771 (No.1)	mitsubishi electric mobility corporation	EUT
I	LF Antenna (Room)	ANT-IR	X001T60771 (No.1)	mitsubishi electric mobility corporation	EUT
J	LF Antenna (Room)	ANT-BP	X001T60771 (No.1)	mitsubishi electric mobility corporation	EUT
K	Antenna coil (Immobilizer)	DN4K-663S0	(No.1)	-	EUT
L	Remote Parking Keyless System Remocon Key	SKE11D-02	20240718-R2 (No.2)	mitsubishi electric mobility corporation	-
M	Keyless System Receiver	SKE115-01	20240724-R1 (No.1)	mitsubishi electric mobility corporation	-
N	Control JIG	X1L-782-01	(No.1)	mitsubishi electric mobility corporation	-
O	SW BOX	X1L-783-01	(No.1)	mitsubishi electric mobility corporation	-

List of Cables Used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Antenna Cable	1.3	Unshielded	Unshielded	X1L-784-03 (No.R1)
2	Antenna Cable	1.3	Unshielded	Unshielded	X1L-784-03 (No.R1)
3	Antenna Cable	1.2	Unshielded	Unshielded	X1L-784-03 (No.R1)
4	Antenna Cable	1.2	Unshielded	Unshielded	X1L-784-03 (No.R1)
5	Antenna Cable	1.2	Unshielded	Unshielded	X1L-784-03 (No.R1)
6	Antenna Cable	1.2	Unshielded	Unshielded	X1L-784-03 (No.R1)
7	Antenna Cable	1.2	Unshielded	Unshielded	X1L-784-03 (No.R1)
8	Antenna Cable	1.2	Unshielded	Unshielded	X1L-784-03 (No.R1)
9	Antenna Cable	1.2	Unshielded	Unshielded	X1L-784-03 (No.R1)
10	Antenna Cable	1.2	Unshielded	Unshielded	X1L-784-03 (No.R1)
11	Signal Cable	1.1	Unshielded	Unshielded	X1L-784-03 (No.R1)
12	DC Cable	1.4	Unshielded	Unshielded	X1L-784-03 (No.R1)
13	Signal Cable	0.9	Unshielded	Unshielded	X1L-784-03 (No.R1)
14	Signal Cable	1.5	Unshielded	Unshielded	X1L-784-03 (No.R1)

SECTION 5: Radiated emission (Fundamental and Spurious Emission)

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[Limit conversion]

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

[Frequency: From 9 kHz to 30 MHz]

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., and 135 deg., 180 deg.) and horizontal polarization.

*Refer to Figure 2 about Direction of the Loop Antenna.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

These tests were performed in semi anechoic chamber. Therefore, the measured level of emissions may be higher than if measurements were made without a ground plane. However, test results were confirmed to pass against standard limit.

[Frequency: From 30 MHz to 1 GHz]

The measuring antenna height varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

[Test instruments and test settings]

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz
Antenna Type	Loop	Biconical	Logperiodic

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.


Frequency	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz
Instrument used	Test Receiver				
Detector	PK / AV	QP	PK / AV	QP	QP
IF Bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz
Test Distance	3 m *1)	3 m *1)	3 m *1)	3 m *2)	3 m

*1) Distance Factor: $40 \times \log (3 \text{ m} / 300 \text{ m}) = -80 \text{ dB}$

*2) Distance Factor: $40 \times \log (3 \text{ m} / 30 \text{ m}) = -40 \text{ dB}$

Figure 1: Test Setup


Below 1 GHz

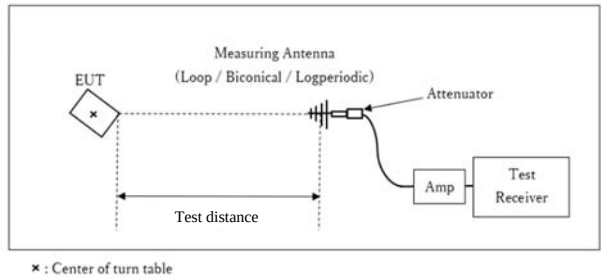


Test Distance: 3 m

Figure 2: Direction of the Loop Antenna

Side View (Vertical)

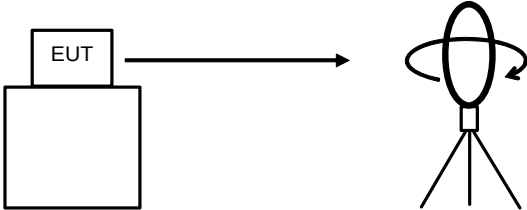


Top View (Horizontal)



Antenna was not rotated.

Top View (Vertical)

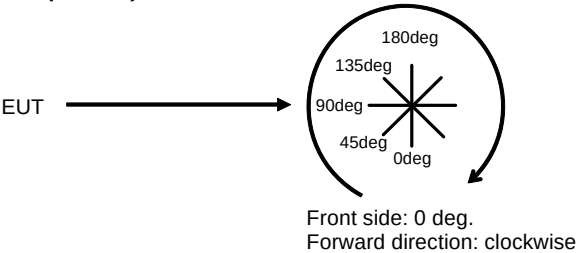

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 9 kHz to 1 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: -20 dB Bandwidth

Test Procedure

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
-20 dB Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer

Test data : APPENDIX
Test result : Pass

SECTION 7: 99 % emission bandwidth

Test Procedure

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
99 % emission bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer

Peak hold was applied as Worst-case measurement.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 23, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 60 % RH	Ken Fujita
Engineer	Junya Okuno	
Mode	Mode 1	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.5	19.5	-74.0	32.2	-	21.8	45.6	23.8	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.5	19.5	-74.0	32.2	-	21.8	45.6	23.8	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.5	19.5	-74.0	32.2	-	21.8	45.6	23.8	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.0	19.6	-64.2	32.2	-	-28.8	39.6	68.4	
0deg	0.37500	PK	32.0	19.7	-64.3	32.2	-	-44.8	36.1	80.9	
0deg	0.50000	QP	27.5	19.7	-24.3	32.2	-	-9.3	33.6	42.9	
0deg	0.62500	QP	22.7	19.7	-24.2	32.2	-	-14.0	31.7	45.7	Floor Noise
0deg	0.75000	QP	23.6	19.7	-24.2	32.2	-	-13.1	30.1	43.2	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	22.3	19.7	-24.2	32.2	-	-14.4	27.6	42.0	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	21.7	19.7	-24.2	32.2	-	-15.0	25.6	40.6	Floor Noise
Hori.	111.894	QP	33.4	12.0	8.0	32.1	-	21.3	43.5	22.2	
Hori.	124.232	QP	36.3	13.3	8.1	32.1	-	25.6	43.5	17.9	
Hori.	152.723	QP	37.6	15.2	8.3	32.0	-	29.1	43.5	14.4	
Hori.	181.153	QP	39.6	16.2	8.6	32.0	-	32.4	43.5	11.1	
Hori.	229.247	QP	40.2	11.4	9.0	32.0	-	28.6	46.0	17.4	
Hori.	292.812	QP	35.1	13.6	9.5	32.0	-	26.2	46.0	19.8	
Vert.	111.894	QP	37.3	12.0	8.0	32.1	-	25.2	43.5	18.3	
Vert.	124.232	QP	40.4	13.3	8.1	32.1	-	29.7	43.5	13.8	
Vert.	152.723	QP	41.5	15.2	8.3	32.0	-	33.0	43.5	10.5	
Vert.	181.153	QP	46.1	16.2	8.6	32.0	-	38.9	43.5	4.6	
Vert.	229.247	QP	32.0	11.4	9.0	32.0	-	20.4	46.0	25.6	
Vert.	292.812	QP	28.7	13.6	9.5	32.0	-	19.8	46.0	26.2	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.5	19.5	-74.0	32.2	0.0	21.8	25.6	3.8	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.5	19.5	-74.0	32.2	0.0	21.8	25.6	3.8	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.5	19.5	-74.0	32.2	0.0	21.8	25.6	3.8	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.0	19.6	-64.2	32.2	0.0	-28.8	19.6	48.4	
0deg	0.37500	PK	32.0	19.7	-64.3	32.2	0.0	-44.8	16.1	60.9	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.5	19.5	6.0	32.2	-	101.8	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 23, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 60 % RH	Ken Fujita
Engineer	Junya Okuno	
Mode	Mode 2	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.3	19.5	-74.0	32.2	-	21.6	45.6	24.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.3	19.5	-74.0	32.2	-	21.6	45.6	24.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.3	19.5	-74.0	32.2	-	21.6	45.6	24.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.0	19.6	-64.2	32.2	-	-28.8	39.6	68.4	
0deg	0.37500	PK	32.2	19.7	-64.3	32.2	-	-44.6	36.1	80.7	
0deg	0.50000	QP	28.0	19.7	-24.3	32.2	-	-8.8	33.6	42.4	
0deg	0.62500	QP	22.6	19.7	-24.2	32.2	-	-14.1	31.7	45.8	Floor Noise
0deg	0.75000	QP	23.3	19.7	-24.2	32.2	-	-13.4	30.1	43.5	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	22.4	19.7	-24.2	32.2	-	-14.3	27.6	41.9	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	21.7	19.7	-24.2	32.2	-	-15.0	25.6	40.6	Floor Noise
Hori.	122.486	QP	35.4	13.2	8.1	32.1	-	24.6	43.5	18.9	
Hori.	151.045	QP	39.1	15.1	8.3	32.0	-	30.5	43.5	13.0	
Hori.	181.464	QP	33.2	16.2	8.6	32.0	-	26.0	43.5	17.5	
Hori.	199.133	QP	34.2	16.6	8.7	32.0	-	27.5	43.5	16.0	
Hori.	271.403	QP	35.1	12.9	9.4	32.0	-	25.4	46.0	20.6	
Hori.	398.223	QP	35.6	15.7	10.1	32.1	-	29.3	46.0	16.7	
Vert.	122.486	QP	38.8	13.2	8.1	32.1	-	28.0	43.5	15.5	
Vert.	151.045	QP	43.3	15.1	8.3	32.0	-	34.7	43.5	8.8	
Vert.	181.464	QP	42.6	16.2	8.6	32.0	-	35.4	43.5	8.1	
Vert.	199.133	QP	35.9	16.6	8.7	32.0	-	29.2	43.5	14.3	
Vert.	271.403	QP	26.9	12.9	9.4	32.0	-	17.2	46.0	28.8	
Vert.	398.223	QP	33.2	15.7	10.1	32.1	-	26.9	46.0	19.1	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.3	19.5	-74.0	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 12.0 V)
0deg	0.12500	PK	108.3	19.5	-74.0	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 10.2 V)
0deg	0.12500	PK	108.3	19.5	-74.0	32.2	0.0	21.6	25.6	4.0	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.0	19.6	-64.2	32.2	0.0	-28.8	19.6	48.4	
0deg	0.37500	PK	32.2	19.7	-64.3	32.2	0.0	-44.6	16.1	60.7	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	108.3	19.5	6.0	32.2	-	101.6	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 23, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 60 % RH	Ken Fujita
Engineer	Junya Okuno	
Mode	Mode 3	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	-	23.2	45.6	22.4	Fundamental (DC 12.0 V)
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	-	23.2	45.6	22.4	Fundamental (DC 10.2 V)
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	-	23.2	45.6	22.4	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.3	19.6	-64.2	32.2	-	-29.5	39.6	69.1	
0deg	0.37500	PK	34.5	19.7	-64.3	32.2	-	-42.3	36.1	78.4	
0deg	0.50000	QP	27.2	19.7	-24.3	32.2	-	-9.6	33.6	43.2	
0deg	0.62500	QP	22.7	19.7	-24.2	32.2	-	-14.0	31.7	45.7	Floor Noise
0deg	0.75000	QP	23.5	19.7	-24.2	32.2	-	-13.2	30.1	43.3	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	22.3	19.7	-24.2	32.2	-	-14.4	27.6	42.0	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	21.7	19.7	-24.2	32.2	-	-15.0	25.6	40.6	Floor Noise
Hori.	57.409	QP	36.0	8.6	7.4	32.1	-	19.9	40.0	20.1	
Hori.	124.265	QP	33.6	13.3	8.1	32.1	-	22.9	43.5	20.6	
Hori.	150.208	QP	36.6	15.0	8.3	32.0	-	27.9	43.5	15.6	
Hori.	182.853	QP	38.9	16.3	8.6	32.0	-	31.8	43.5	11.7	
Hori.	219.168	QP	32.4	11.2	8.9	32.0	-	20.5	46.0	25.5	
Hori.	355.331	QP	32.5	15.1	9.9	32.1	-	25.4	46.0	20.6	
Vert.	57.409	QP	33.2	8.6	7.4	32.1	-	17.1	40.0	22.9	
Vert.	124.265	QP	42.4	13.3	8.1	32.1	-	31.7	43.5	11.8	
Vert.	150.208	QP	39.2	15.0	8.3	32.0	-	30.5	43.5	13.0	
Vert.	182.853	QP	42.9	16.3	8.6	32.0	-	35.8	43.5	7.7	
Vert.	219.168	QP	32.9	11.2	8.9	32.0	-	21.0	46.0	25.0	
Vert.	355.331	QP	32.3	15.1	9.9	32.1	-	25.2	46.0	20.8	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	0.0	23.2	25.6	2.4	Fundamental (DC 12.0 V)
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	0.0	23.2	25.6	2.4	Fundamental (DC 10.2 V)
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	0.0	23.2	25.6	2.4	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.3	19.6	-64.2	32.2	0.0	-29.5	19.6	49.1	
0deg	0.37500	PK	34.5	19.7	-64.3	32.2	0.0	-42.3	16.1	58.4	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.9	19.5	6.0	32.2	-	103.2	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 23, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 60 % RH	Ken Fujita
Engineer	Junya Okuno	
Mode	Mode 4	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	-	23.1	45.6	22.5	Fundamental (DC 12.0 V)
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	-	23.1	45.6	22.5	Fundamental (DC 10.2 V)
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	-	23.1	45.6	22.5	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.8	19.6	-64.2	32.2	-	-29.0	39.6	68.6	
0deg	0.37500	PK	34.2	19.7	-64.3	32.2	-	-42.6	36.1	78.7	
0deg	0.50000	QP	27.0	19.7	-24.3	32.2	-	-9.8	33.6	43.4	
0deg	0.62500	QP	22.7	19.7	-24.2	32.2	-	-14.0	31.7	45.7	Floor Noise
0deg	0.75000	QP	23.5	19.7	-24.2	32.2	-	-13.2	30.1	43.3	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	22.2	19.7	-24.2	32.2	-	-14.5	27.6	42.1	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	21.7	19.7	-24.2	32.2	-	-15.0	25.6	40.6	Floor Noise
Hori.	134.226	QP	40.3	14.1	8.2	32.0	-	30.6	43.5	12.9	
Hori.	144.722	QP	43.4	14.8	8.3	32.0	-	34.5	43.5	9.0	
Hori.	152.840	QP	44.8	15.2	8.3	32.0	-	36.3	43.5	7.2	
Hori.	182.685	QP	39.2	16.3	8.6	32.0	-	32.1	43.5	11.4	
Hori.	297.028	QP	35.6	13.7	9.6	32.0	-	26.9	46.0	19.1	
Hori.	402.114	QP	32.8	15.8	10.1	32.1	-	26.6	46.0	19.4	
Vert.	134.226	QP	38.2	14.1	8.2	32.0	-	28.5	43.5	15.0	
Vert.	144.722	QP	42.8	14.8	8.3	32.0	-	33.9	43.5	9.6	
Vert.	152.840	QP	44.9	15.2	8.3	32.0	-	36.4	43.5	7.1	
Vert.	182.685	QP	45.7	16.3	8.6	32.0	-	38.6	43.5	4.9	
Vert.	297.028	QP	32.1	13.7	9.6	32.0	-	23.4	46.0	22.6	
Vert.	402.114	QP	33.9	15.8	10.1	32.1	-	27.7	46.0	18.3	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	0.0	23.1	25.6	2.5	Fundamental (DC 12.0 V)
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	0.0	23.1	25.6	2.5	Fundamental (DC 10.2 V)
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	0.0	23.1	25.6	2.5	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.8	19.6	-64.2	32.2	0.0	-29.0	19.6	48.6	
0deg	0.37500	PK	34.2	19.7	-64.3	32.2	0.0	-42.6	16.1	58.7	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.8	19.5	6.0	32.2	-	103.1	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 23, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 60 % RH	Ken Fujita
Engineer	Junya Okuno	
Mode	Mode 5	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	-	23.2	45.6	22.4	Fundamental (DC 12.0 V)
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	-	23.2	45.6	22.4	Fundamental (DC 10.2 V)
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	-	23.2	45.6	22.4	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.2	19.6	-64.2	32.2	-	-29.6	39.6	69.2	
0deg	0.37500	PK	33.7	19.7	-64.3	32.2	-	-43.1	36.1	79.2	
0deg	0.50000	QP	27.3	19.7	-24.3	32.2	-	-9.5	33.6	43.1	
0deg	0.62500	QP	22.7	19.7	-24.2	32.2	-	-14.0	31.7	45.7	Floor Noise
0deg	0.75000	QP	23.4	19.7	-24.2	32.2	-	-13.3	30.1	43.4	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	22.4	19.7	-24.2	32.2	-	-14.3	27.6	41.9	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	21.7	19.7	-24.2	32.2	-	-15.0	25.6	40.6	Floor Noise
Hori.	124.582	QP	39.3	13.3	8.1	32.1	-	28.6	43.5	14.9	
Hori.	152.524	QP	40.1	15.2	8.3	32.0	-	31.6	43.5	11.9	
Hori.	180.032	QP	40.3	16.2	8.6	32.0	-	33.1	43.5	10.4	
Hori.	192.685	QP	44.2	16.5	8.7	32.0	-	37.4	43.5	6.1	
Hori.	346.376	QP	28.9	15.0	9.8	32.1	-	21.6	46.0	24.4	
Hori.	401.637	QP	34.5	15.8	10.1	32.1	-	28.3	46.0	17.7	
Vert.	124.582	QP	40.8	13.3	8.1	32.1	-	30.1	43.5	13.4	
Vert.	152.524	QP	43.8	15.2	8.3	32.0	-	35.3	43.5	8.2	
Vert.	180.032	QP	47.7	16.2	8.6	32.0	-	40.5	43.5	3.0	
Vert.	192.685	QP	43.9	16.5	8.7	32.0	-	37.1	43.5	6.4	
Vert.	346.376	QP	35.6	15.0	9.8	32.1	-	28.3	46.0	17.7	
Vert.	401.637	QP	33.7	15.8	10.1	32.1	-	27.5	46.0	18.5	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	0.0	23.2	25.6	2.4	Fundamental (DC 12.0 V)
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	0.0	23.2	25.6	2.4	Fundamental (DC 10.2 V)
0deg	0.12500	PK	109.9	19.5	-74.0	32.2	0.0	23.2	25.6	2.4	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.2	19.6	-64.2	32.2	0.0	-29.6	19.6	49.2	
0deg	0.37500	PK	33.7	19.7	-64.3	32.2	0.0	-43.1	16.1	59.2	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.9	19.5	6.0	32.2	-	103.2	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 23, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 60 % RH	Ken Fujita
Engineer	Junya Okuno	
Mode	Mode 6	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	-	23.1	45.6	22.5	Fundamental (DC 12.0 V)
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	-	23.1	45.6	22.5	Fundamental (DC 10.2 V)
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	-	23.1	45.6	22.5	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.0	19.6	-64.2	32.2	-	-28.8	39.6	68.4	
0deg	0.37500	PK	34.7	19.7	-64.3	32.2	-	-42.1	36.1	78.2	
0deg	0.50000	QP	27.1	19.7	-24.3	32.2	-	-9.7	33.6	43.3	
0deg	0.62500	QP	22.7	19.7	-24.2	32.2	-	-14.0	31.7	45.7	Floor Noise
0deg	0.75000	QP	23.4	19.7	-24.2	32.2	-	-13.3	30.1	43.4	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	22.2	19.7	-24.2	32.2	-	-14.5	27.6	42.1	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	21.7	19.7	-24.2	32.2	-	-15.0	25.6	40.6	Floor Noise
Hori.	144.773	QP	38.1	14.8	8.3	32.0	-	29.2	43.5	14.3	
Hori.	168.816	QP	37.7	15.9	8.5	32.0	-	30.1	43.5	13.4	
Hori.	181.226	QP	38.8	16.2	8.6	32.0	-	31.6	43.5	11.9	
Hori.	198.336	QP	36.4	16.6	8.7	32.0	-	29.7	43.5	13.8	
Hori.	330.346	QP	35.4	14.5	9.7	32.1	-	27.5	46.0	18.5	
Hori.	376.700	QP	30.1	15.1	10.0	32.1	-	23.1	46.0	22.9	
Vert.	144.773	QP	41.2	14.8	8.3	32.0	-	32.3	43.5	11.2	
Vert.	168.816	QP	45.3	15.9	8.5	32.0	-	37.7	43.5	5.8	
Vert.	181.226	QP	47.5	16.2	8.6	32.0	-	40.3	43.5	3.2	
Vert.	198.336	QP	45.4	16.6	8.7	32.0	-	38.7	43.5	4.8	
Vert.	330.346	QP	28.9	14.5	9.7	32.1	-	21.0	46.0	25.0	
Vert.	376.700	QP	36.7	15.1	10.0	32.1	-	29.7	46.0	16.3	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	0.0	23.1	25.6	2.5	Fundamental (DC 12.0 V)
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	0.0	23.1	25.6	2.5	Fundamental (DC 10.2 V)
0deg	0.12500	PK	109.8	19.5	-74.0	32.2	0.0	23.1	25.6	2.5	Fundamental (DC 13.8 V)
0deg	0.25000	PK	48.0	19.6	-64.2	32.2	0.0	-28.8	19.6	48.4	
0deg	0.37500	PK	34.7	19.7	-64.3	32.2	0.0	-42.1	16.1	58.2	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	109.8	19.5	6.0	32.2	-	103.1	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 24, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 55 % RH	Ken Fujita
Engineer	Junki Nagatomi	
Mode	Mode 7	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	-	23.4	45.6	22.2	Fundamental (DC 12.0 V)
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	-	23.4	45.6	22.2	Fundamental (DC 10.2 V)
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	-	23.4	45.6	22.2	Fundamental (DC 13.8 V)
0deg	0.25000	PK	46.9	19.6	-74.0	32.2	-	-39.7	39.6	79.3	
0deg	0.37500	PK	33.5	19.7	-73.9	32.2	-	-52.9	36.1	89.0	
0deg	0.50000	QP	27.2	19.7	-33.9	32.2	-	-19.2	33.6	52.8	
0deg	0.62500	QP	22.7	19.7	-33.9	32.2	-	-23.7	31.7	55.4	Floor Noise
0deg	0.75000	QP	23.5	19.7	-33.9	32.2	-	-22.9	30.1	53.0	
0deg	0.87500	QP	22.0	19.7	-33.8	32.2	-	-24.3	28.7	53.0	Floor Noise
0deg	1.00000	QP	22.2	19.7	-33.8	32.2	-	-24.1	27.6	51.7	
0deg	1.12500	QP	21.8	19.7	-33.8	32.2	-	-24.5	26.5	51.0	Floor Noise
0deg	1.25000	QP	21.7	19.7	-33.8	32.2	-	-24.6	25.6	50.2	Floor Noise
Hori.	133.263	QP	39.8	14.1	8.2	32.0	-	30.1	43.5	13.4	
Hori.	151.589	QP	41.9	15.1	8.3	32.0	-	33.3	43.5	10.2	
Hori.	179.335	QP	42.2	16.2	8.6	32.0	-	35.0	43.5	8.5	
Hori.	193.709	QP	43.1	16.5	8.7	32.0	-	36.3	43.5	7.2	
Hori.	225.869	QP	36.9	11.3	9.0	32.0	-	25.2	46.0	20.8	
Hori.	382.457	QP	33.4	15.2	10.0	32.1	-	26.5	46.0	19.5	
Vert.	133.263	QP	41.9	14.1	8.2	32.0	-	32.2	43.5	11.3	
Vert.	151.589	QP	45.2	15.1	8.3	32.0	-	36.6	43.5	6.9	
Vert.	179.335	QP	45.8	16.2	8.6	32.0	-	38.6	43.5	4.9	
Vert.	193.709	QP	46.8	16.5	8.7	32.0	-	40.0	43.5	3.5	
Vert.	225.869	QP	28.6	11.3	9.0	32.0	-	16.9	46.0	29.1	
Vert.	382.457	QP	34.3	15.2	10.0	32.1	-	27.4	46.0	18.6	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	0.0	23.4	25.6	2.2	Fundamental (DC 12.0 V)
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	0.0	23.4	25.6	2.2	Fundamental (DC 10.2 V)
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	0.0	23.4	25.6	2.2	Fundamental (DC 13.8 V)
0deg	0.25000	PK	46.9	19.6	-74.0	32.2	0.0	-39.7	19.6	59.3	
0deg	0.37500	PK	33.5	19.7	-73.9	32.2	0.0	-52.9	16.1	69.0	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.1	19.5	6.0	32.2	-	103.4	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 24, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 55 % RH	Ken Fujita
Engineer	Junki Nagatomi	
Mode	Mode 8	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	-	23.4	45.6	22.2	Fundamental (DC 12.0 V)
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	-	23.4	45.6	22.2	Fundamental (DC 10.2 V)
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	-	23.4	45.6	22.2	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.9	19.6	-64.2	32.2	-	-28.9	39.6	68.5	
0deg	0.37500	PK	34.0	19.7	-64.3	32.2	-	-42.8	36.1	78.9	
0deg	0.50000	QP	27.1	19.7	-24.3	32.2	-	-9.7	33.6	43.3	
0deg	0.62500	QP	22.7	19.7	-24.2	32.2	-	-14.0	31.7	45.7	Floor Noise
0deg	0.75000	QP	23.3	19.7	-24.2	32.2	-	-13.4	30.1	43.5	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	22.1	19.7	-24.2	32.2	-	-14.6	27.6	42.2	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	21.7	19.7	-24.2	32.2	-	-15.0	25.6	40.6	Floor Noise
Hori.	134.338	QP	40.2	14.1	8.2	32.0	-	30.5	43.5	13.0	
Hori.	150.477	QP	41.5	15.1	8.3	32.0	-	32.9	43.5	10.6	
Hori.	180.732	QP	42.2	16.2	8.6	32.0	-	35.0	43.5	8.5	
Hori.	194.044	QP	43.3	16.5	8.7	32.0	-	36.5	43.5	7.0	
Hori.	316.069	QP	33.1	14.0	9.7	32.0	-	24.8	46.0	21.2	
Hori.	414.715	QP	32.5	16.0	10.2	32.1	-	26.6	46.0	19.4	
Vert.	134.338	QP	41.5	14.1	8.2	32.0	-	31.8	43.5	11.7	
Vert.	150.477	QP	42.6	15.1	8.3	32.0	-	34.0	43.5	9.5	
Vert.	180.732	QP	47.2	16.2	8.6	32.0	-	40.0	43.5	3.5	
Vert.	194.044	QP	44.3	16.5	8.7	32.0	-	37.5	43.5	6.0	
Vert.	316.069	QP	35.6	14.0	9.7	32.0	-	27.3	46.0	18.7	
Vert.	414.715	QP	34.2	16.0	10.2	32.1	-	28.3	46.0	17.7	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	0.0	23.4	25.6	2.2	Fundamental (DC 12.0 V)
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	0.0	23.4	25.6	2.2	Fundamental (DC 10.2 V)
0deg	0.12500	PK	110.1	19.5	-74.0	32.2	0.0	23.4	25.6	2.2	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.9	19.6	-64.2	32.2	0.0	-28.9	19.6	48.5	
0deg	0.37500	PK	34.0	19.7	-64.3	32.2	0.0	-42.8	16.1	58.9	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.1	19.5	6.0	32.2	-	103.4	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 24, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 55 % RH	Ken Fujita
Engineer	Junki Nagatomi	
Mode	Mode 9	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.2	19.5	-74.0	32.2	-	23.5	45.6	22.1	Fundamental (DC 12.0 V)
0deg	0.12500	PK	110.2	19.5	-74.0	32.2	-	23.5	45.6	22.1	Fundamental (DC 10.2 V)
0deg	0.12500	PK	110.2	19.5	-74.0	32.2	-	23.5	45.6	22.1	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.4	19.6	-64.2	32.2	-	-29.4	39.6	69.0	
0deg	0.37500	PK	34.4	19.7	-64.3	32.2	-	-42.4	36.1	78.5	
0deg	0.50000	QP	26.9	19.7	-24.3	32.2	-	-9.9	33.6	43.5	
0deg	0.62500	QP	22.7	19.7	-24.2	32.2	-	-14.0	31.7	45.7	Floor Noise
0deg	0.75000	QP	23.3	19.7	-24.2	32.2	-	-13.4	30.1	43.5	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	22.0	19.7	-24.2	32.2	-	-14.7	27.6	42.3	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	21.7	19.7	-24.2	32.2	-	-15.0	25.6	40.6	Floor Noise
Hori.	133.975	QP	40.1	14.1	8.2	32.0	-	30.4	43.5	13.1	
Hori.	152.573	QP	41.7	15.2	8.3	32.0	-	33.2	43.5	10.3	
Hori.	179.988	QP	42.8	16.2	8.6	32.0	-	35.6	43.5	7.9	
Hori.	196.087	QP	43.0	16.5	8.7	32.0	-	36.2	43.5	7.3	
Hori.	224.225	QP	40.1	11.3	9.0	32.0	-	28.4	46.0	17.6	
Hori.	357.986	QP	35.7	15.1	9.9	32.1	-	28.6	46.0	17.4	
Hori.	513.743	QP	31.1	17.6	10.8	32.2	-	27.3	46.0	18.7	
Vert.	133.975	QP	41.7	14.1	8.2	32.0	-	32.0	43.5	11.5	
Vert.	152.573	QP	44.1	15.2	8.3	32.0	-	35.6	43.5	7.9	
Vert.	179.988	QP	47.1	16.2	8.6	32.0	-	39.9	43.5	3.6	
Vert.	196.087	QP	43.3	16.5	8.7	32.0	-	36.5	43.5	7.0	
Vert.	224.225	QP	28.7	11.3	9.0	32.0	-	17.0	46.0	29.0	
Vert.	357.986	QP	29.8	15.1	9.9	32.1	-	22.7	46.0	23.3	
Vert.	513.743	QP	31.6	17.6	10.8	32.2	-	27.8	46.0	18.2	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.2	19.5	-74.0	32.2	0.0	23.5	25.6	2.1	Fundamental (DC 12.0 V)
0deg	0.12500	PK	110.2	19.5	-74.0	32.2	0.0	23.5	25.6	2.1	Fundamental (DC 10.2 V)
0deg	0.12500	PK	110.2	19.5	-74.0	32.2	0.0	23.5	25.6	2.1	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.4	19.6	-64.2	32.2	0.0	-29.4	19.6	49.0	
0deg	0.37500	PK	34.4	19.7	-64.3	32.2	0.0	-42.4	16.1	58.5	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	110.2	19.5	6.0	32.2	-	103.5	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Emission (Fundamental and Spurious Emission)

Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 24, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 55 % RH	Ken Fujita
Engineer	Junki Nagatomi	
Mode	Mode 10	

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	94.7	19.5	-74.0	32.2	-	8.0	45.6	37.6	Fundamental (DC 12.0 V)
0deg	0.12500	PK	94.7	19.5	-74.0	32.2	-	8.0	45.6	37.6	Fundamental (DC 10.2 V)
0deg	0.12500	PK	94.7	19.5	-74.0	32.2	-	8.0	45.6	37.6	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.8	19.6	-64.2	32.2	-	-29.0	39.6	68.6	
0deg	0.37500	PK	31.1	19.7	-64.3	32.2	-	-45.7	36.1	81.8	
0deg	0.50000	QP	32.3	19.7	-24.3	32.2	-	-4.5	33.6	38.1	
0deg	0.62500	QP	22.7	19.7	-24.2	32.2	-	-14.0	31.7	45.7	Floor Noise
0deg	0.75000	QP	26.7	19.7	-24.2	32.2	-	-10.0	30.1	40.1	
0deg	0.87500	QP	22.0	19.7	-24.2	32.2	-	-14.7	28.7	43.4	Floor Noise
0deg	1.00000	QP	24.1	19.7	-24.2	32.2	-	-12.6	27.6	40.2	
0deg	1.12500	QP	21.8	19.7	-24.2	32.2	-	-14.9	26.5	41.4	Floor Noise
0deg	1.25000	QP	23.0	19.7	-24.2	32.2	-	-13.7	25.6	39.3	
Hori.	47.838	QP	25.4	12.0	7.3	32.1	-	12.6	40.0	27.4	
Hori.	151.567	QP	30.1	15.1	8.3	32.0	-	21.5	43.5	22.0	
Hori.	180.808	QP	27.6	16.2	8.6	32.0	-	20.4	43.5	23.1	
Hori.	247.230	QP	26.2	11.7	9.2	32.0	-	15.1	46.0	30.9	
Hori.	296.350	QP	26.9	13.6	9.6	32.0	-	18.1	46.0	27.9	
Hori.	710.430	QP	25.9	20.0	11.7	32.2	-	25.4	46.0	20.6	
Vert.	47.838	QP	25.4	12.0	7.3	32.1	-	12.6	40.0	27.4	
Vert.	151.567	QP	31.3	15.1	8.3	32.0	-	22.7	43.5	20.8	
Vert.	180.808	QP	32.4	16.2	8.6	32.0	-	25.2	43.5	18.3	
Vert.	247.230	QP	26.7	11.7	9.2	32.0	-	15.6	46.0	30.4	
Vert.	296.350	QP	26.4	13.6	9.6	32.0	-	17.6	46.0	28.4	
Vert.	710.430	QP	25.8	20.0	11.7	32.2	-	25.3	46.0	20.7	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	94.7	19.5	-74.0	32.2	0.0	8.0	25.6	17.6	Fundamental (DC 12.0 V)
0deg	0.12500	PK	94.7	19.5	-74.0	32.2	0.0	8.0	25.6	17.6	Fundamental (DC 10.2 V)
0deg	0.12500	PK	94.7	19.5	-74.0	32.2	0.0	8.0	25.6	17.6	Fundamental (DC 13.8 V)
0deg	0.25000	PK	47.8	19.6	-64.2	32.2	0.0	-29.0	19.6	48.6	
0deg	0.37500	PK	31.1	19.7	-64.3	32.2	0.0	-45.7	16.1	61.8	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Amplifier) + Duty factor *
* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3 m without Distance factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0deg	0.12500	PK	94.7	19.5	6.0	32.2	-	88.0	-	-	Fundamental


Result = Reading + Ant Factor + Loss (Cable+Attenuator) - Gain(Amplifier)

If Gain 0.0dB shown in the above table, pre-amplifier was not used to avoid the influence of carrier power. The pre-amplifier used for carrier frequency measurement was not saturated.
Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*It was confirmed that there were no differences in the spurious emission due to the input voltage.

Radiated Spurious Emission
(Plot data, Worst case for Spurious Emission)


Test place	Ise EMC Lab.	No.4
Semi Anechoic Chamber	No.1	August 6, 2024
Date	July 23, 2024	23 deg. C / 49 % RH
Temperature / Humidity	21 deg. C / 60 % RH	Ken Fujita
Engineer	Junya Okuno	
Mode	Mode 5	

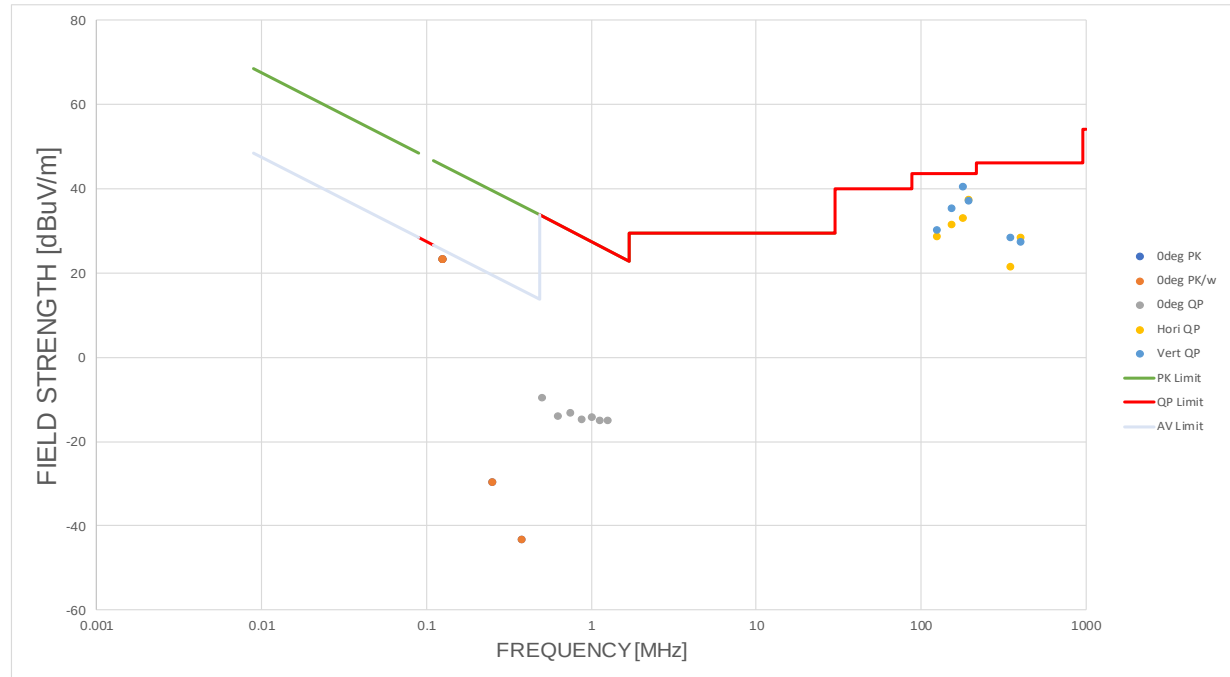

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 1

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
8.773	9.8496

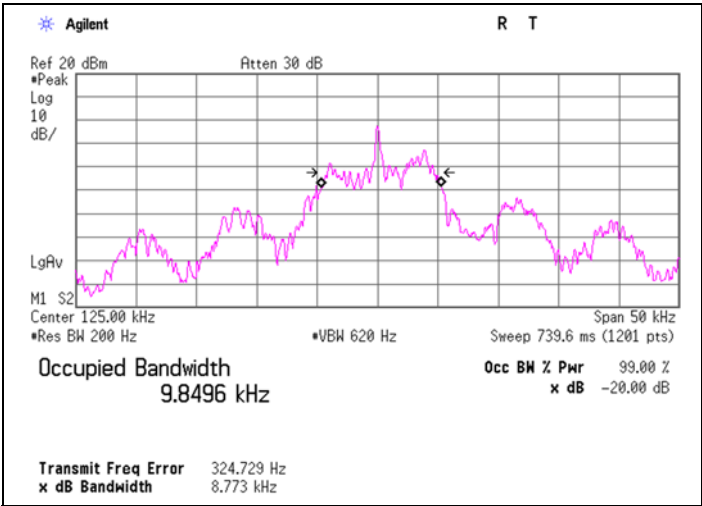


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 2

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.401	15.2306

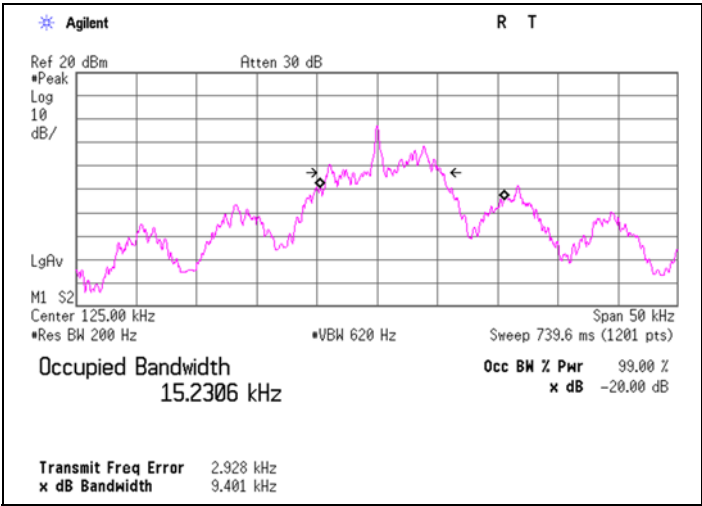


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 3

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.027	15.5122

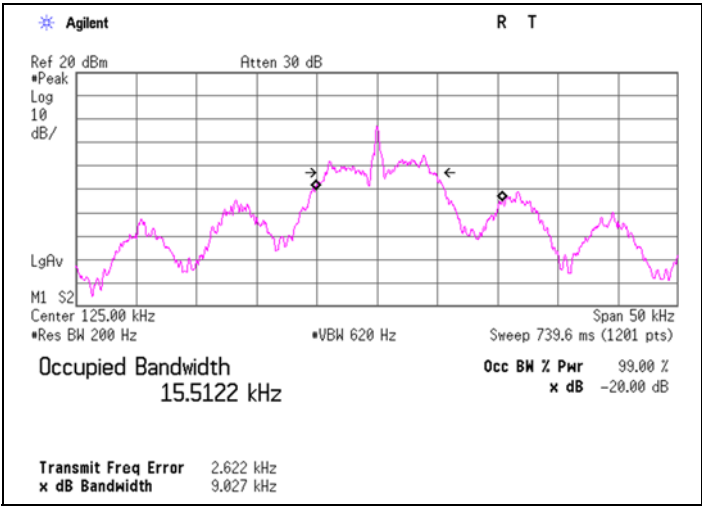


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 4

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.170	14.9453

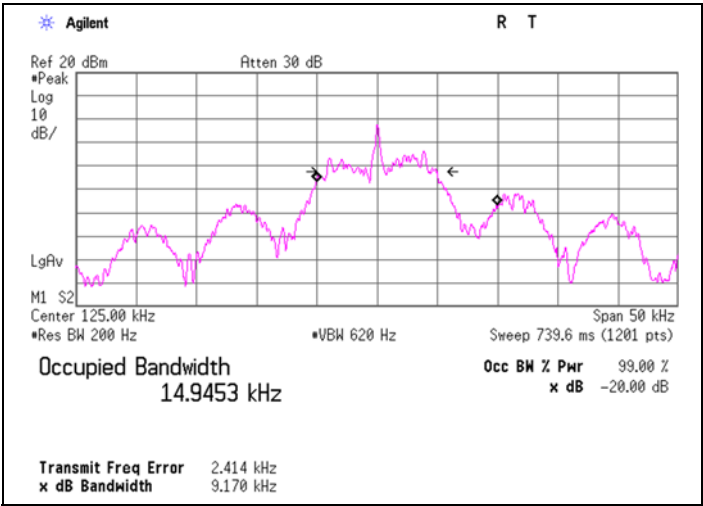


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 5

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.101	16.0410

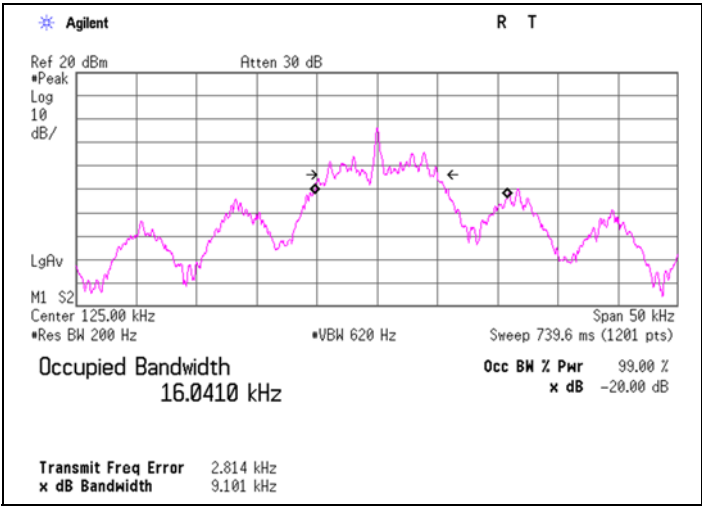


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 6

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.221	15.6929

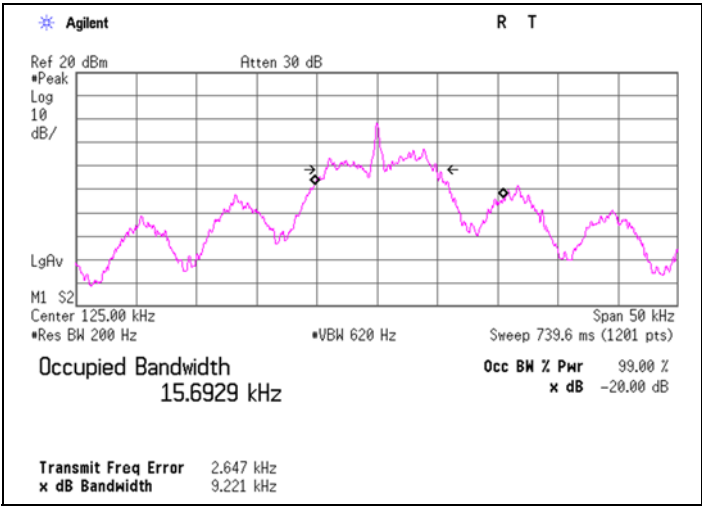


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 7

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.205	15.1695

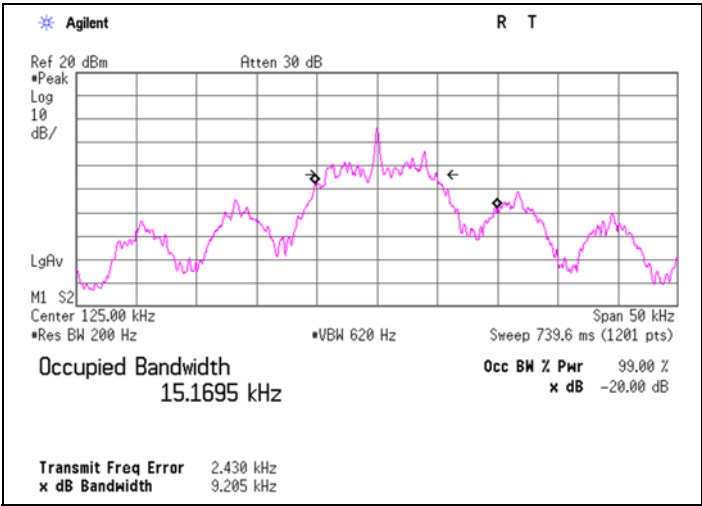


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 8

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
8.632	14.8306

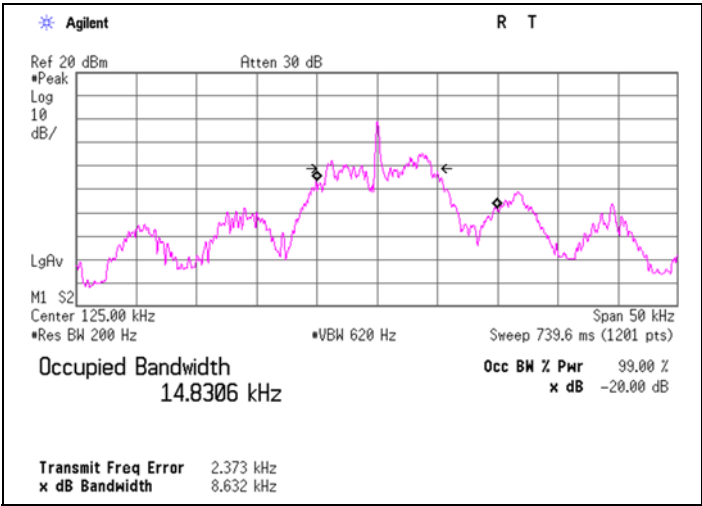


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 9

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
9.235	13.6360

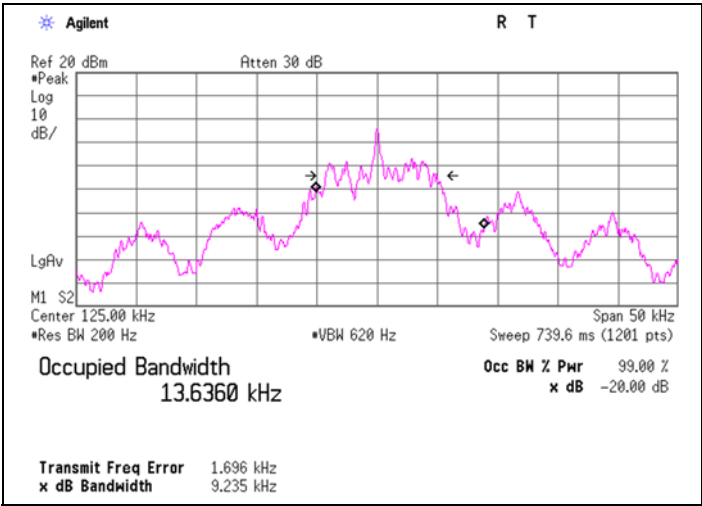


*It was confirmed that there were no differences in the bandwidth due to the input voltage.

-20 dB Bandwidth / 99 % emission bandwidth

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	November 5, 2024
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Junki Nagatomi
Mode	Mode 10

-20 dB Bandwidth [kHz]	99 % emission bandwidth [kHz]
8.759	8.9207

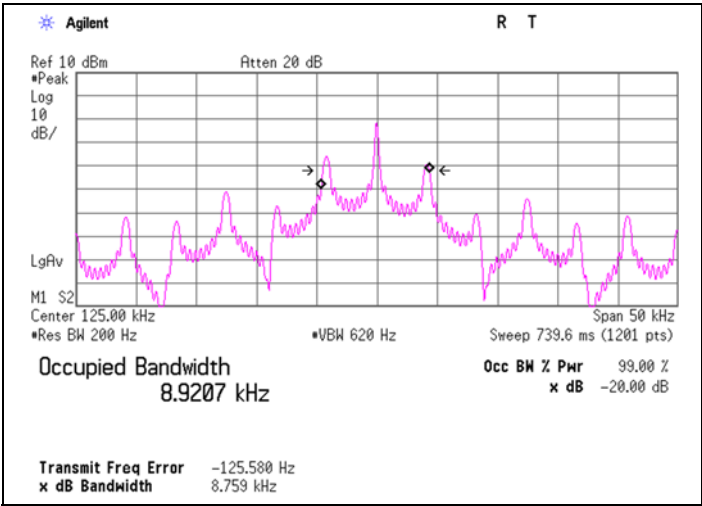

*It was confirmed that there were no differences in the bandwidth due to the input voltage.

APPENDIX 2: Test instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	141213	Attenuator(6dB)	Weinschel Corp	2	BK7971	11/16/2023	12
RE	141215	Coaxial Cable	Fujikura/Suhner/TSJ	5D-2W/3D-2W/ RG400u/RFM- E421(SW)	-/01068 (Switcher)	06/24/2024	12
RE	141267	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-192	09/21/2023	12
RE	141331	Attenuator(6dB)	TME	UFA-01	-	02/17/2024	12
RE	141397	Coaxial Cable	UL Japan	-	-	11/22/2023	12
RE	141425	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	VHA 91031302	08/10/2023	12
RE	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	02/01/2024	12
RE	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	02/01/2024	12
RE	141568	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	2901	01/10/2024	12
RE	141583	Pre Amplifier	SONOMA INSTRUMENT	310	260833	04/04/2024	12
RE	141899	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180655	05/09/2024	12
RE	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	11/20/2023	12
RE	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	05/17/2024	12
RE	141998	AC1_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	12/06/2023	24
RE	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	12/13/2023	24
RE	146613	Loop Antenna	Rohde & Schwarz	HFH2-Z2	842906/011	09/02/2024	12
RE	142152	Loop Antenna	Rohde & Schwarz	HFH2-Z2	836553/009	10/17/2023	12
RE	142226	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	142230	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	159670	Coaxial Cable	UL Japan	-	-	11/21/2023	12
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	244710	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202104	01/25/2024	12
RE	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	12/12/2023	24
RE	244707	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202102	01/25/2024	12
RE	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/06/2024	12
RE	142228	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated Emission