

# TEST REPORT

Reference No..... : WTS17S0681404-2E  
FCC ID ..... : UT3SMART8  
Applicant..... : Shenzhen Konka Telecommunications Technology Co., Ltd.  
Address..... : 9008, ShenNan Road, Overseas Chinese Town, ShenZhen, Guangdong, China  
Manufacturer ..... : The same as above  
Address..... : The same as above  
Product Name..... : Smart Phone  
Model No..... : SMART 8(32G), SMART 8(64G)  
Brand..... : ÖWN  
Standards..... : FCC CFR47 Part 15.247:2016  
Date of Receipt sample .... : Jun. 08, 2017  
Date of Test ..... : Jun. 09 ~ 22, 2017  
Date of Issue..... : Jun. 23, 2017  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

*Ford Wang*

Ford Wang / Project Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 2 Laboratories Introduction

**Waltek Services Test Group Ltd** is a professional third-party testing and certification organization with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by CNAS (China National Accreditation Service for Conformity Assessment) AQSIIQ, CMA and IECEE for CBTL. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CPSC(Consumer Product Safety Commission), CEC(California energy efficiency), IC(Industry Canada) and ELI(Efficient Lighting Initiative). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as UL, Intertek(ETL-SEMKO), CSA, TÜV Rheinland, TÜV SÜD, etc.



**Waltek Services Test Group Ltd.** is one of the largest and the most comprehensive third party testing organizations in China, our headquarter located in Shenzhen and have branches in Foshan, Dongguan, Zhongshan, Suzhou, Ningbo and Hong Kong, Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), reliability and energy performance, Chemical test. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 LABORATORIES INTRODUCTION.....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 REVISION HISTORY .....</b>	<b>5</b>
<b>5 GENERAL INFORMATION.....</b>	<b>6</b>
5.1 GENERAL DESCRIPTION OF E.U.T. ....	6
5.2 DETAILS OF E.U.T. ....	6
5.3 CHANNEL LIST.....	8
5.4 TEST MODE.....	9
5.5 TEST FACILITY.....	10
<b>6 TEST SUMMARY .....</b>	<b>11</b>
<b>7 EQUIPMENT USED DURING TEST .....</b>	<b>12</b>
7.1 EQUIPMENTS LIST.....	12
7.2 DESCRIPTION OF SUPPORT UNITS .....	13
7.3 MEASUREMENT UNCERTAINTY .....	13
7.4 TEST EQUIPMENT CALIBRATION .....	13
<b>8 CONDUCTED EMISSION .....</b>	<b>14</b>
8.1 E.U.T. OPERATION .....	14
8.2 EUT SETUP.....	14
8.3 MEASUREMENT DESCRIPTION .....	14
8.4 CONDUCTED EMISSION TEST RESULT .....	15
<b>9 RADIATED EMISSIONS.....</b>	<b>19</b>
9.1 EUT OPERATION.....	19
9.2 TEST SETUP .....	20
9.3 SPECTRUM ANALYZER SETUP .....	21
9.4 TEST PROCEDURE .....	22
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	22
9.6 SUMMARY OF TEST RESULTS .....	23
<b>10 CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>39</b>
10.1 TEST PROCEDURE.....	39
10.2 TEST RESULT .....	40
<b>11 BAND EDGE MEASUREMENT .....</b>	<b>56</b>
11.1 TEST PROCEDURE .....	56
11.2 TEST RESULT .....	57
<b>12 6 DB BANDWIDTH MEASUREMENT .....</b>	<b>62</b>
12.1 TEST PROCEDURE:.....	62
12.2 TEST RESULT: .....	62
<b>13 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>71</b>
13.1 TEST PROCEDURE:.....	71
13.2 TEST RESULT: .....	72
<b>14 POWER SPECTRAL DENSITY .....</b>	<b>81</b>
14.1 TEST PROCEDURE:.....	81
14.2 TEST RESULT: .....	81
<b>15 ANTENNA REQUIREMENT .....</b>	<b>90</b>
<b>16 RF EXPOSURE.....</b>	<b>91</b>

**17 PHOTOGRAPHS OF TEST SETUP AND EUT..... 92**

## 4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S0681404-2E	Jun. 08, 2017	Jun. 09 ~ 22, 2017	Jun. 23, 2017	original	-	Valid

## 5 General Information

### 5.1 General Description of E.U.T.

Product Name:	Smart Phone
Model No.:	SMART 8(32G), SMART 8(64G)
Model Description:	Only the model names and RAM are different and SMART 8(32G) is the test sample.
GSM Band(s):	GSM 850/900/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/IV/V/VIII
LTE Band(s):	FDD Band 2/4/7
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	V1.0
Software Version:	KAA_SMART8_CLA_EN_N_1.02.601
Highest frequency (Exclude Radio):	1.25GHz
Storage Location:	Internal Storage
Note:	N/A

### 5.2 Details of E.U.T.

Operation Frequency:	GSM/GPRS/EDGE 850: 824~849MHz PCS/GPRS/EDGE 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz WCDMA Band IV: 1710~1755MHz LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz LTE Band 7: 2500-2570MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz Bluetooth: 2402~2480MHz
Max. RF output power:	GSM 850: 32.88dBm PCS1900: 30.09dBm WCDMA Band II: 22.42dBm WCDMA Band V: 22.41dBm WCDMA Band IV: 22.54dBm

	LTE Band 2: 22.98dBm LTE Band 4: 22.88dBm LTE Band 7: 22.90dBm WiFi(2.4G): 9.50dBm Bluetooth: -1.39dBm
Type of Modulation:	GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: BPSK, 16QAM LTE: QPSK, 16QAM WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK
Antenna installation:	GSM/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain:	GSM 850: -0.65dBi PCS1900: 0.75dBi WCDMA Band II: 0.75dBi WCDMA Band V: -0.65dBi WCDMA Band IV: 0.87dBi LTE Band 2: 0.75dBi LTE Band 4: 0.87dBi LTE Band 7: 0.79dBi WiFi(2.4G): -0.15dBi Bluetooth: -0.15dBi
Technical Data:	Battery DC 3.85V, 4000mAh DC 5V, 2.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.35A)
Adapter:	Manufacture: Shenzhen KunXing Technology Co.,Ltd. Model No.: ÖWN SMART 8

### 5.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480



## 5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

## 5.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

## 6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 7 Equipment Used during Test

### 7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.12,2016	Sep.11,2017
2.	LISN	R&S	ENV216	101215	Sep.12,2016	Sep.11,2017
3.	Cable	Top	TYPE16(3.5M)	-	Sep.12,2016	Sep.11,2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.12,2016	Sep.11,2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12,2016	Sep.11,2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12,2016	Sep.11,2017
4.	Cable	LARGE	RF300	-	Sep.12,2016	Sep.11,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	Apr.29, 2017	Apr.28, 2018
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Apr.09,2017	Apr.08,2018
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.09,2017	Apr.08,2018
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12,2016	Sep.11,2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.09,2017	Apr.08,2018
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.09,2017	Apr.08,2018
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.13,2017	Apr.12,2018
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.13,2017	Apr.12,2018
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Apr.13,2017	Apr.12,2018
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr.09,2017	Apr.08,2018
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.13,2017	Apr.12,2018
4	Cable	HUBER+SUHNER	CBL2	525178	Apr.13,2017	Apr.12,2018

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.12,2016	Sep.11,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.12,2016	Sep.11,2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.12,2016	Sep.11,2017

## 7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 7.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)
Conducted Spurious Emissions test	$\pm 3.12$ dB (9kHz~30MHz)
	$\pm 4.21$ dB (30M~1000MHz)
	$\pm 5.14$ dB (1000M~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

## 7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	60
5 to 30	60	50

### 8.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

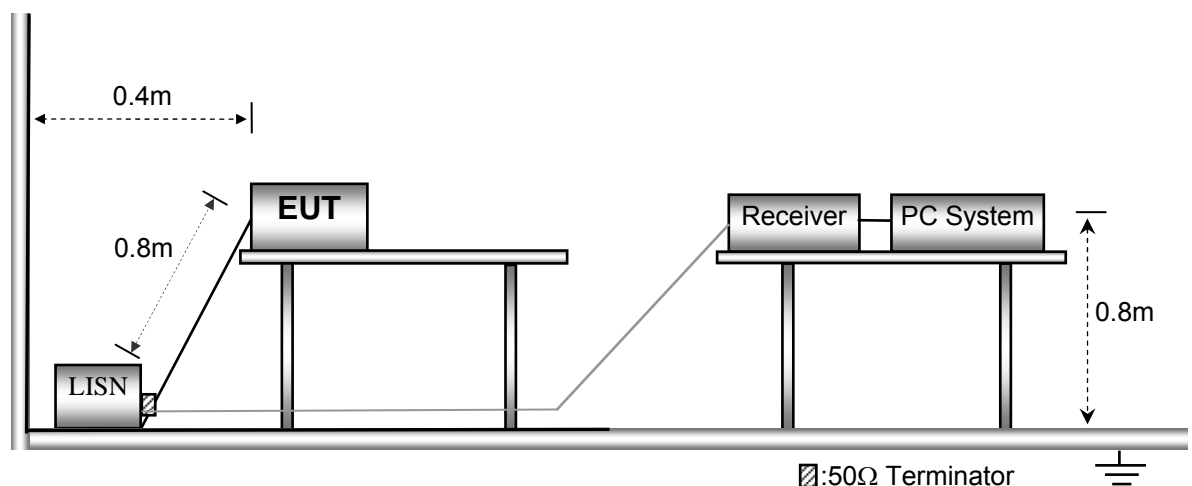

### 8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode ( b mode low channel )

Live line:

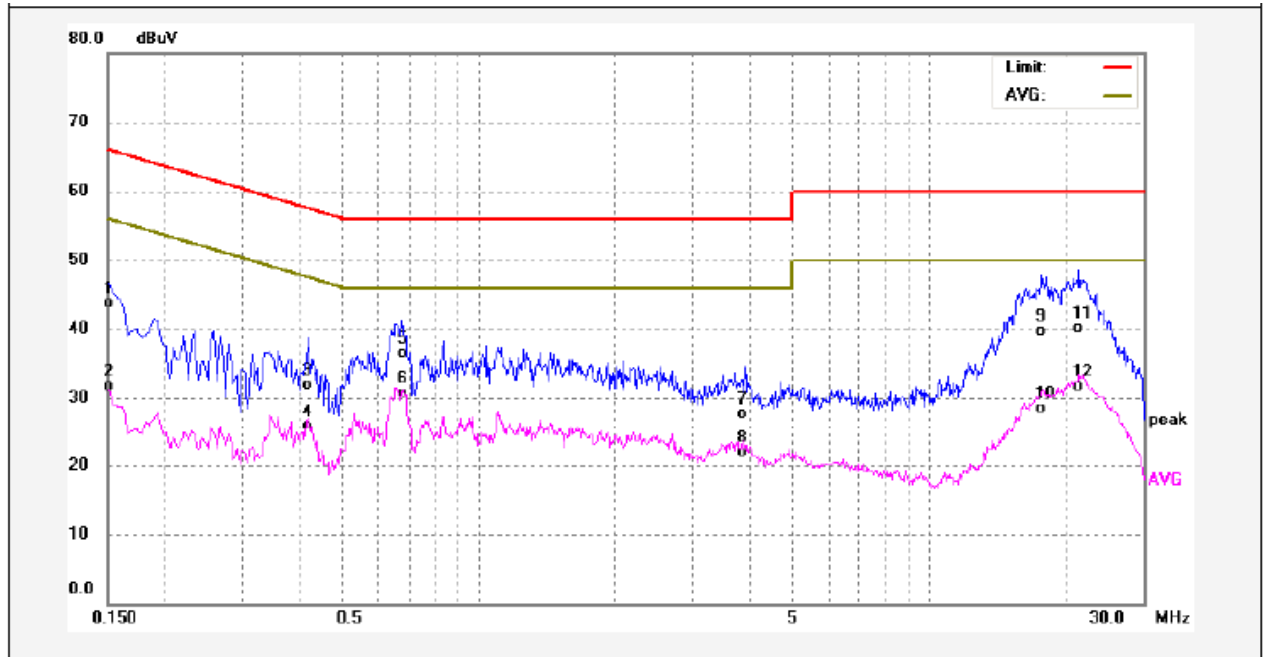

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	33.70	10.06	43.76	65.99	-22.23	QP	
2	0.1500	21.65	10.06	31.71	55.99	-24.28	AVG	
3	0.4180	21.80	10.04	31.84	57.49	-25.65	QP	
4	0.4180	15.81	10.04	25.85	47.49	-21.64	AVG	
5	0.6740	26.41	10.10	36.51	56.00	-19.49	QP	
6	0.6740	20.60	10.10	30.70	46.00	-15.30	AVG	
7	3.9220	17.48	10.27	27.75	56.00	-28.25	QP	
8	3.9220	11.64	10.27	21.91	46.00	-24.09	AVG	
9	17.7580	29.23	10.43	39.66	60.00	-20.34	QP	
10	17.7580	18.13	10.43	28.56	50.00	-21.44	AVG	
11	21.5419	29.62	10.50	40.12	60.00	-19.88	QP	
12	21.5419	21.15	10.50	31.65	50.00	-18.35	AVG	

Neutral line:

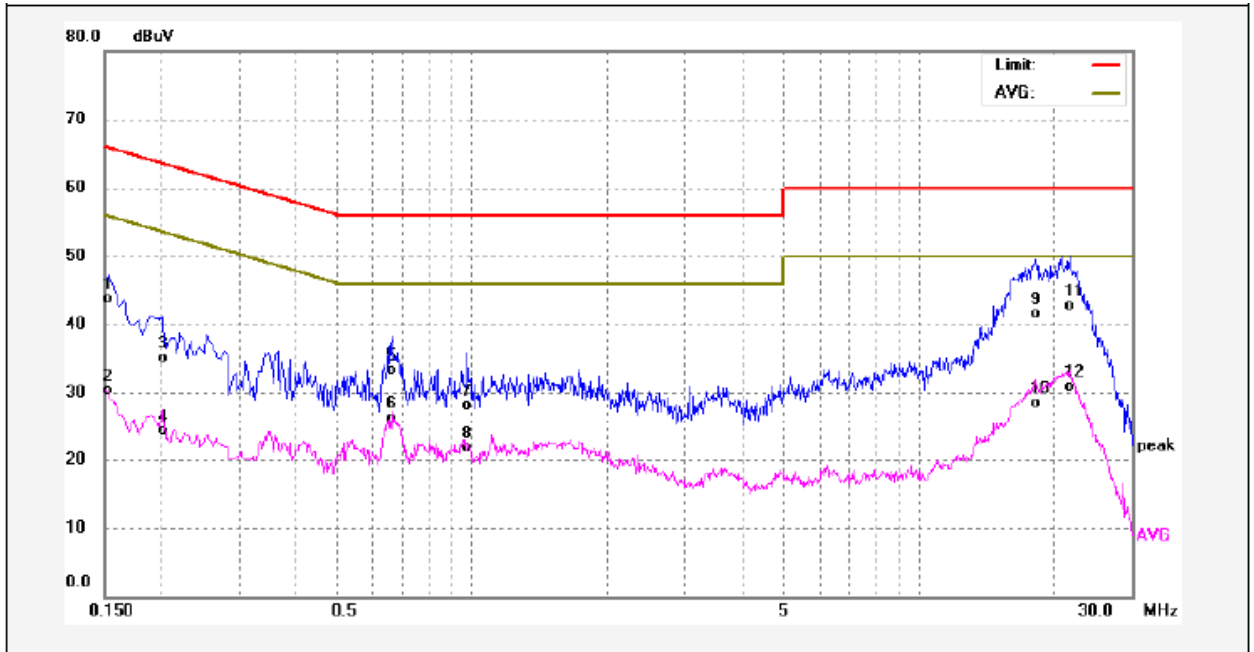


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	33.72	10.02	43.74	65.78	-22.04	QP	
2	0.1539	20.30	10.02	30.32	55.78	-25.46	AVG	
3	0.2020	25.15	9.92	35.07	63.52	-28.45	QP	
4	0.2020	14.31	9.92	24.23	53.52	-29.29	AVG	
5	0.6580	23.12	10.09	33.21	56.00	-22.79	QP	
6	0.6580	16.14	10.09	26.23	46.00	-19.77	AVG	
7	0.9740	17.99	10.08	28.07	56.00	-27.93	QP	
8	0.9740	11.61	10.08	21.69	46.00	-24.31	AVG	
9	18.2380	30.97	10.44	41.41	60.00	-18.59	QP	
10	18.2380	18.01	10.44	28.45	50.00	-21.55	AVG	
11	21.7260	32.17	10.50	42.67	60.00	-17.33	QP	
12	21.7260	20.40	10.50	30.90	50.00	-19.10	AVG	




Worst Mode: BLE mode (low channel )

Live line:

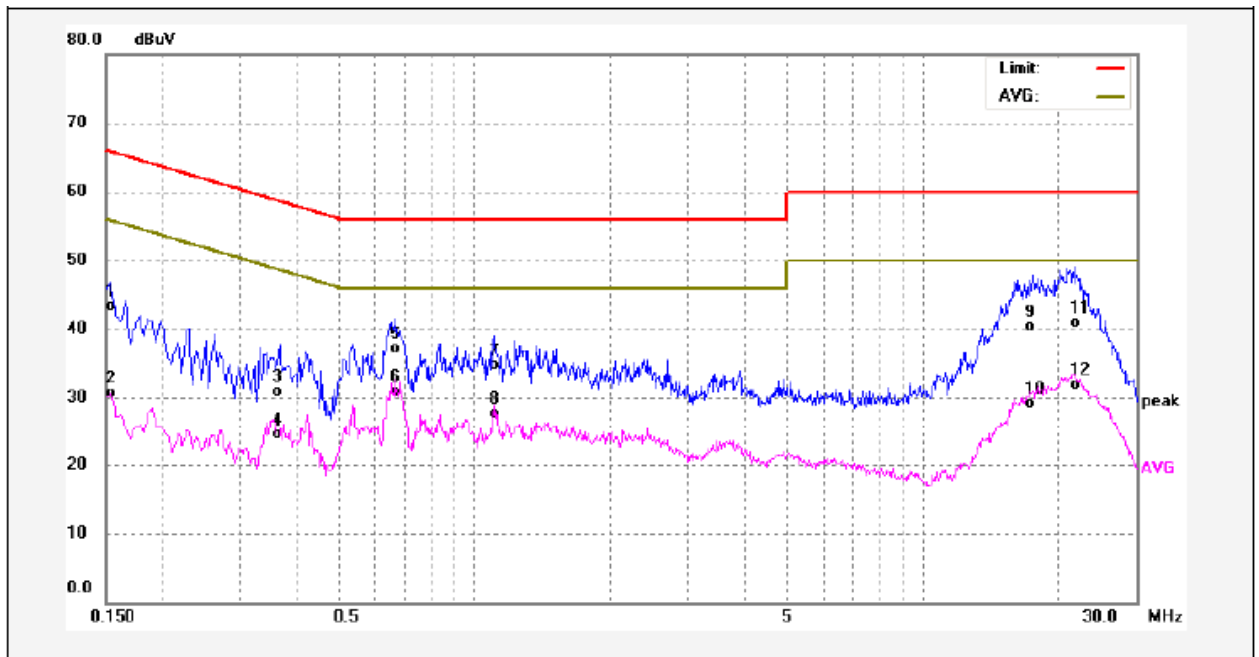

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	33.31	10.02	43.33	65.78	-22.45	QP	
2	0.1539	20.73	10.02	30.75	55.78	-25.03	AVG	
3	0.3660	20.77	10.05	30.82	58.59	-27.77	QP	
4	0.3660	14.55	10.05	24.60	48.59	-23.99	AVG	
5	0.6620	27.06	10.09	37.15	56.00	-18.85	QP	
6	0.6620	20.82	10.09	30.91	46.00	-15.09	AVG	
7	1.1019	24.54	10.26	34.80	56.00	-21.20	QP	
8	1.1019	17.52	10.26	27.78	46.00	-18.22	AVG	
9	17.6540	29.87	10.43	40.30	60.00	-19.70	QP	
10	17.6540	18.65	10.43	29.08	50.00	-20.92	AVG	
11	21.8340	30.48	10.50	40.98	60.00	-19.02	QP	
12	21.8340	21.37	10.50	31.87	50.00	-18.13	AVG	

Neutral line:

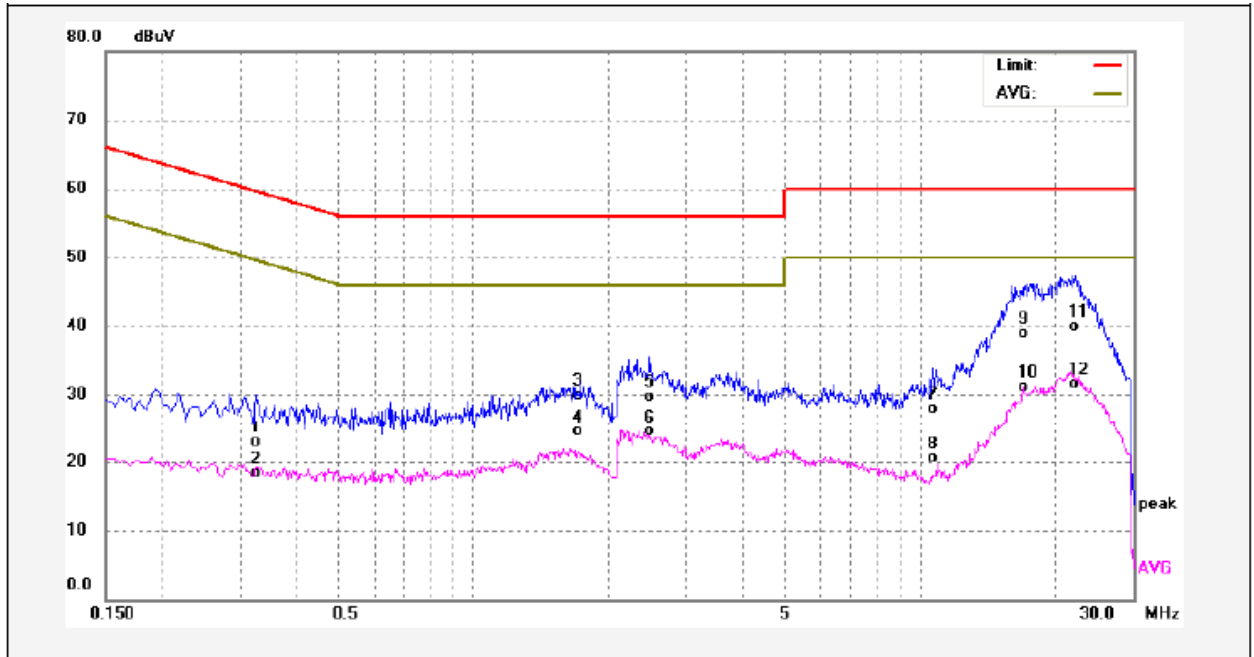

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3260	12.94	10.02	22.96	59.55	-36.59	QP	
2	0.3260	8.19	10.02	18.21	49.55	-31.34	AVG	
3	1.7340	19.76	10.17	29.93	56.00	-26.07	QP	
4	1.7340	14.28	10.17	24.45	46.00	-21.55	AVG	
5	2.4780	19.49	10.23	29.72	56.00	-26.28	QP	
6	2.4780	14.26	10.23	24.49	46.00	-21.51	AVG	
7	10.6220	17.56	10.37	27.93	60.00	-32.07	QP	
8	10.6220	10.16	10.37	20.53	50.00	-29.47	AVG	
9	17.2099	28.40	10.42	38.82	60.00	-21.18	QP	
10	17.2099	20.69	10.42	31.11	50.00	-18.89	AVG	
11	22.2820	29.42	10.51	39.93	60.00	-20.07	QP	
12	22.2820	21.07	10.51	31.58	50.00	-18.42	AVG	

## 9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

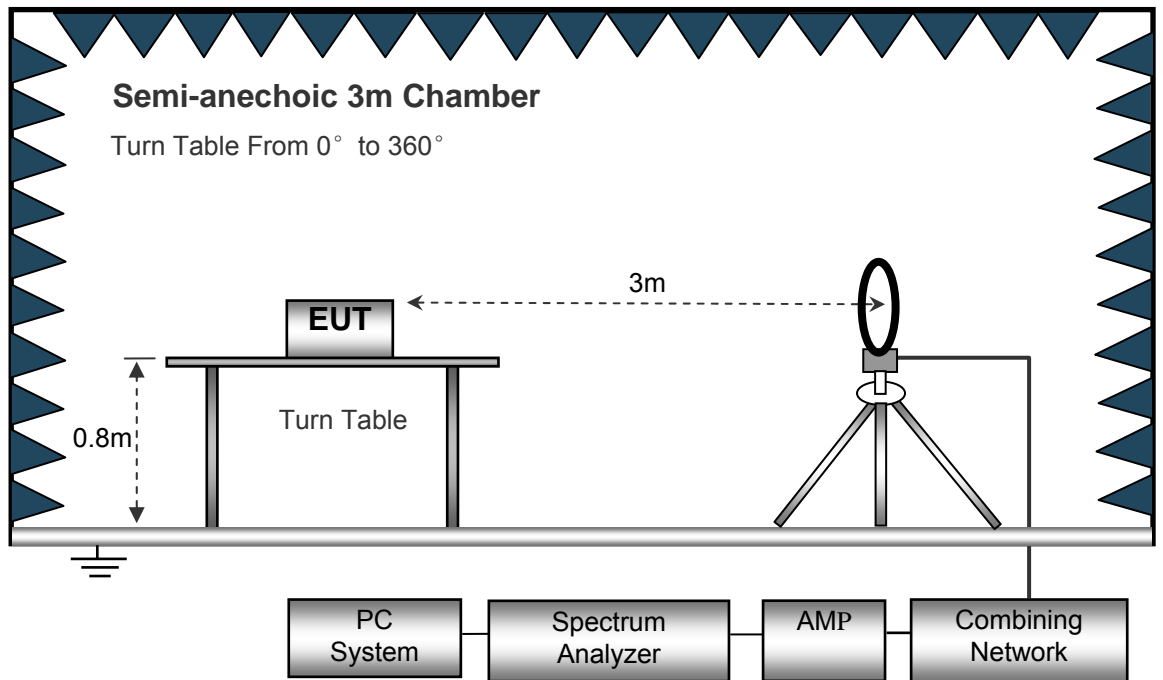

The test setup for emission measurement from 30 MHz to 1 GHz.

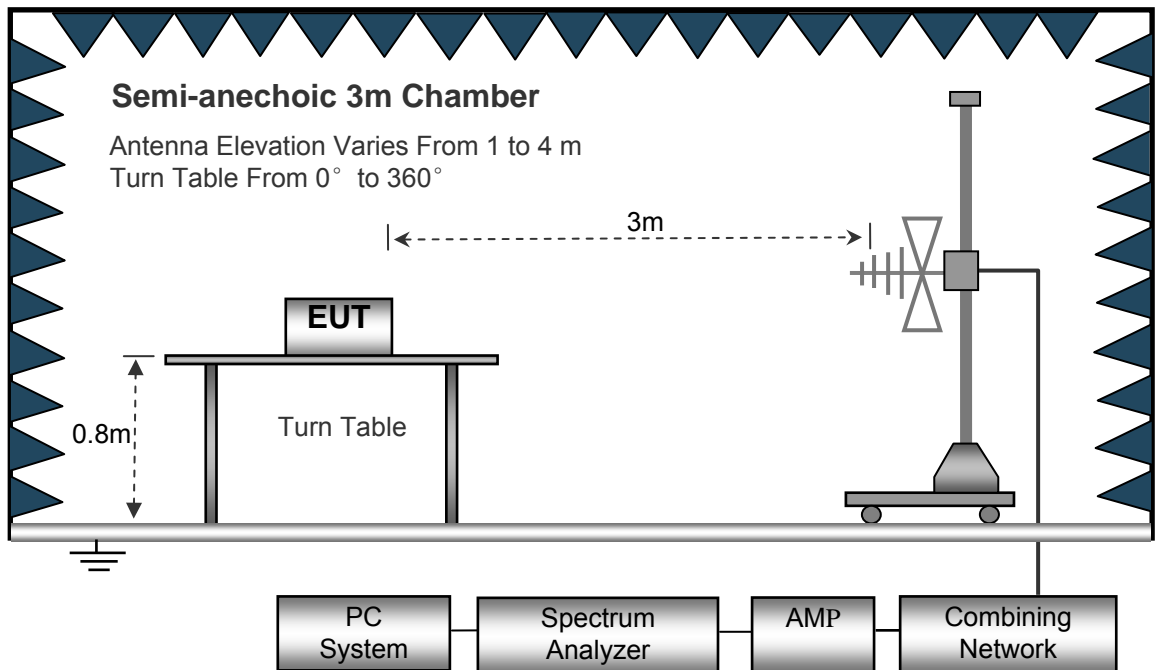

The test setup for emission measurement above 1 GHz.

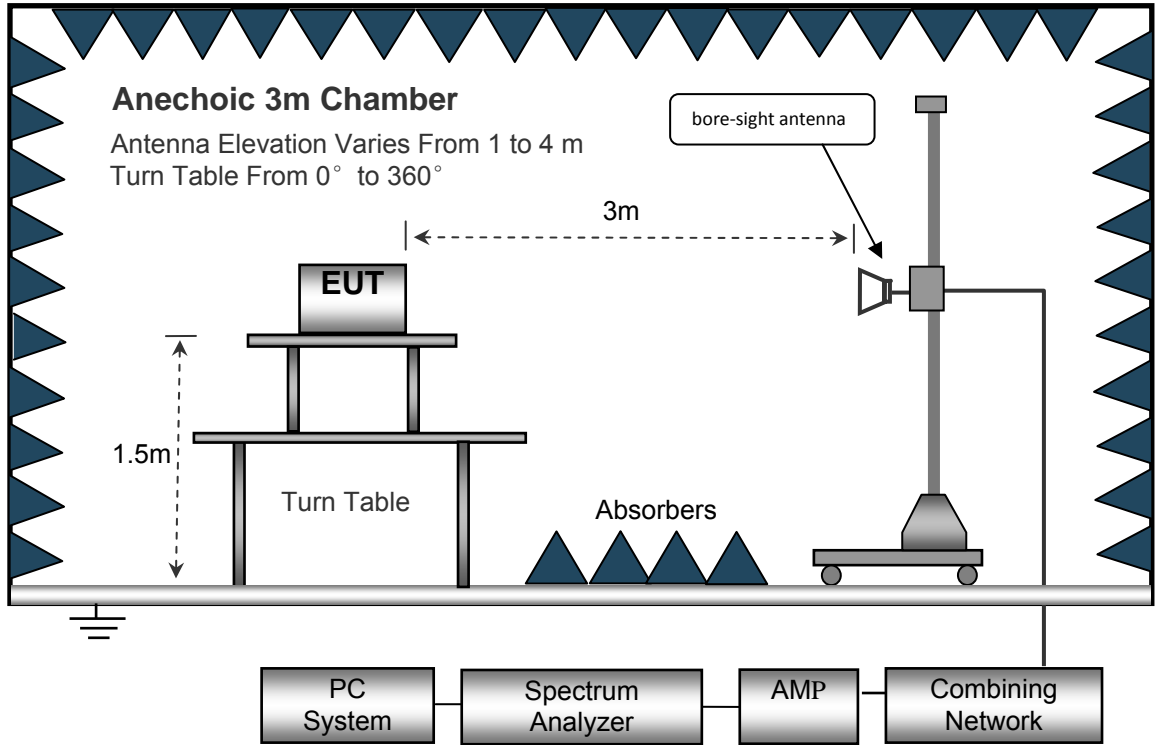

### 9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.021	25.32	QP	21.84	40.00	7.16	29.54	-22.38
15.730	24.89	QP	21.35	40.00	6.24	29.54	-23.30
25.680	25.13	QP	20.67	40.00	5.80	29.54	-23.74
802.11g							
6.021	25.39	QP	21.84	40.00	7.23	29.54	-22.31
15.730	25.12	QP	21.35	40.00	6.47	29.54	-23.07
25.680	26.53	QP	20.67	40.00	7.20	29.54	-22.34
802.11n(HT20)							
6.021	25.13	QP	21.84	40.00	6.97	29.54	-22.57
15.730	24.82	QP	21.35	40.00	6.17	29.54	-23.37
25.680	26.74	QP	20.67	40.00	7.41	29.54	-22.13
802.11n(HT40)							
6.021	24.63	QP	21.84	40.00	6.47	29.54	-23.07
15.730	25.61	QP	21.35	40.00	6.96	29.54	-22.58
25.680	26.45	QP	20.67	40.00	7.12	29.54	-22.42

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
223.45	41.49	QP	223	1.8	H	-11.62	29.87	46.00	-16.13
223.45	35.03	QP	298	1.6	V	-11.62	23.41	46.00	-22.59
4824.00	49.02	PK	249	1.7	V	-1.06	47.96	74.00	-26.04
4824.00	45.67	Ave	249	1.7	V	-1.06	44.61	54.00	-9.39
7236.00	42.95	PK	102	1.6	H	1.33	44.28	74.00	-29.72
7236.00	40.30	Ave	102	1.6	H	1.33	41.63	54.00	-12.37
2320.45	46.35	PK	22	1.8	V	-13.19	33.16	74.00	-40.84
2320.45	39.59	Ave	22	1.8	V	-13.19	26.40	54.00	-27.60
2371.16	42.48	PK	34	1.6	H	-13.14	29.34	74.00	-44.66
2371.16	38.11	Ave	34	1.6	H	-13.14	24.97	54.00	-29.03
2487.68	43.17	PK	84	1.2	V	-13.08	30.09	74.00	-43.91
2487.68	38.60	Ave	84	1.2	V	-13.08	25.52	54.00	-28.48



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	42.93	QP	141	1.0	H	-11.62	31.31	46.00	-14.69
223.45	34.22	QP	345	1.9	V	-11.62	22.60	46.00	-23.40
4874.00	49.97	PK	71	1.2	V	-0.62	49.35	74.00	-24.65
4874.00	45.48	Ave	71	1.2	V	-0.62	44.86	54.00	-9.14
7311.00	41.82	PK	41	1.7	H	2.21	44.03	74.00	-29.97
7311.00	40.10	Ave	41	1.7	H	2.21	42.31	54.00	-11.69
2337.99	45.14	PK	340	1.7	V	-13.19	31.95	74.00	-42.05
2337.99	37.55	Ave	340	1.7	V	-13.19	24.36	54.00	-29.64
2380.30	44.74	PK	272	1.2	H	-13.14	31.60	74.00	-42.40
2380.30	36.38	Ave	272	1.2	H	-13.14	23.24	54.00	-30.76
2483.60	43.98	PK	355	1.6	V	-13.08	30.90	74.00	-43.10
2483.60	38.27	Ave	355	1.6	V	-13.08	25.19	54.00	-28.81

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: High Channel 2462MHz									
223.45	44.02	QP	193	1.5	H	-11.62	32.40	46.00	-13.60
223.45	33.82	QP	266	1.1	V	-11.62	22.20	46.00	-23.80
4924.00	51.29	PK	354	1.3	V	-0.24	51.05	74.00	-22.95
4924.00	45.23	Ave	354	1.3	V	-0.24	44.99	54.00	-9.01
7386.00	40.50	PK	153	1.6	H	2.84	43.34	74.00	-30.66
7386.00	41.12	Ave	153	1.6	H	2.84	43.96	54.00	-10.04
2340.94	46.07	PK	144	1.0	V	-13.19	32.88	74.00	-41.12
2340.94	38.40	Ave	144	1.0	V	-13.19	25.21	54.00	-28.79
2358.95	44.92	PK	105	1.8	H	-13.14	31.78	74.00	-42.22
2358.95	36.44	Ave	105	1.8	H	-13.14	23.30	54.00	-30.70
2484.65	42.94	PK	49	1.9	V	-13.08	29.86	74.00	-44.14
2484.65	36.86	Ave	49	1.9	V	-13.08	23.78	54.00	-30.22

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Low Channel 2412MHz									
223.45	42.58	QP	310	1.9	H	-11.62	30.96	46.00	-15.04
223.45	33.89	QP	81	1.4	V	-11.62	22.27	46.00	-23.73
4824.00	52.19	PK	209	1.1	V	-1.06	51.13	74.00	-22.87
4824.00	45.14	Ave	209	1.1	V	-1.06	44.08	54.00	-9.92
7236.00	40.92	PK	342	1.1	H	1.33	42.25	74.00	-31.75
7236.00	42.34	Ave	342	1.1	H	1.33	43.67	54.00	-10.33
2339.87	45.85	PK	195	1.3	V	-13.19	32.66	74.00	-41.34
2339.87	38.07	Ave	195	1.3	V	-13.19	24.88	54.00	-29.12
2380.36	43.57	PK	179	1.1	H	-13.14	30.43	74.00	-43.57
2380.36	37.32	Ave	179	1.1	H	-13.14	24.18	54.00	-29.82
2494.77	44.32	PK	322	1.4	V	-13.08	31.24	74.00	-42.76
2494.77	37.98	Ave	322	1.4	V	-13.08	24.90	54.00	-29.10

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	43.47	QP	77	1.7	H	-11.62	31.85	46.00	-14.15
223.45	33.54	QP	174	1.6	V	-11.62	21.92	46.00	-24.08
4874.00	52.81	PK	357	1.3	V	-0.62	52.19	74.00	-21.81
4874.00	43.65	Ave	357	1.3	V	-0.62	43.03	54.00	-10.97
7311.00	41.83	PK	61	1.3	H	2.21	44.04	74.00	-29.96
7311.00	43.79	Ave	61	1.3	H	2.21	46.00	54.00	-8.00
2348.90	45.88	PK	313	1.0	V	-13.19	32.69	74.00	-41.31
2348.90	38.21	Ave	313	1.0	V	-13.19	25.02	54.00	-28.98
2365.03	42.06	PK	203	1.5	H	-13.14	28.92	74.00	-45.08
2365.03	38.08	Ave	203	1.5	H	-13.14	24.94	54.00	-29.06
2487.52	42.61	PK	167	1.5	V	-13.08	29.53	74.00	-44.47
2487.52	36.45	Ave	167	1.5	V	-13.08	23.37	54.00	-30.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
223.45	44.54	QP	144	1.1	H	-11.62	32.92	46.00	-13.08
223.45	34.88	QP	44	1.5	V	-11.62	23.26	46.00	-22.74
4924.00	52.11	PK	353	2.0	V	-0.24	51.87	74.00	-22.13
4924.00	43.31	Ave	353	2.0	V	-0.24	43.07	54.00	-10.93
7386.00	41.77	PK	25	1.3	H	2.84	44.61	74.00	-29.39
7386.00	44.68	Ave	25	1.3	H	2.84	47.52	54.00	-6.48
2322.79	46.99	PK	166	1.8	V	-13.19	33.80	74.00	-40.20
2322.79	39.55	Ave	166	1.8	V	-13.19	26.36	54.00	-27.64
2376.36	42.88	PK	131	1.0	H	-13.14	29.74	74.00	-44.26
2376.36	37.46	Ave	131	1.0	H	-13.14	24.32	54.00	-29.68
2491.32	43.89	PK	147	1.2	V	-13.08	30.81	74.00	-43.19
2491.32	36.91	Ave	147	1.2	V	-13.08	23.83	54.00	-30.17

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Low Channel 2412MHz									
223.45	43.59	QP	34	1.7	H	-11.62	31.97	46.00	-14.03
223.45	35.75	QP	217	1.9	V	-11.62	24.13	46.00	-21.87
4824.00	51.74	PK	125	1.8	V	-1.06	50.68	74.00	-23.32
4824.00	41.85	Ave	125	1.8	V	-1.06	40.79	54.00	-13.21
7236.00	43.18	PK	158	1.5	H	1.33	44.51	74.00	-29.49
7236.00	43.80	Ave	158	1.5	H	1.33	45.13	54.00	-8.87
2315.17	45.30	PK	80	1.3	V	-13.19	32.11	74.00	-41.89
2315.17	39.88	Ave	80	1.3	V	-13.19	26.69	54.00	-27.31
2360.03	42.82	PK	264	1.0	H	-13.14	29.68	74.00	-44.32
2360.03	37.84	Ave	264	1.0	H	-13.14	24.70	54.00	-29.30
2488.79	43.39	PK	58	1.5	V	-13.08	30.31	74.00	-43.69
2488.79	38.05	Ave	58	1.5	V	-13.08	24.97	54.00	-29.03

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Middle Channel 2437MHz									
223.45	44.14	QP	169	1.8	H	-11.62	32.52	46.00	-13.48
223.45	36.99	QP	91	1.9	V	-11.62	25.37	46.00	-20.63
4874.00	50.72	PK	281	1.5	V	-0.62	50.10	74.00	-23.90
4874.00	42.93	Ave	281	1.5	V	-0.62	42.31	54.00	-11.69
7311.00	42.74	PK	139	1.7	H	2.21	44.95	74.00	-29.05
7311.00	43.42	Ave	139	1.7	H	2.21	45.63	54.00	-8.37
2321.46	45.73	PK	172	1.2	V	-13.19	32.54	74.00	-41.46
2321.46	38.42	Ave	172	1.2	V	-13.19	25.23	54.00	-28.77
2383.67	42.49	PK	316	1.8	H	-13.14	29.35	74.00	-44.65
2383.67	36.51	Ave	316	1.8	H	-13.14	23.37	54.00	-30.63
2490.43	44.91	PK	264	1.4	V	-13.08	31.83	74.00	-42.17
2490.43	36.89	Ave	264	1.4	V	-13.08	23.81	54.00	-30.19

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: High Channel 2462MHz									
223.45	45.28	QP	31	1.2	H	-11.62	33.66	46.00	-12.34
223.45	37.29	QP	295	1.2	V	-11.62	25.67	46.00	-20.33
4924.00	51.91	PK	219	1.1	V	-0.24	51.67	74.00	-22.33
4924.00	41.70	Ave	219	1.1	V	-0.24	41.46	54.00	-12.54
7386.00	41.84	PK	295	2.0	H	2.84	44.68	74.00	-29.32
7386.00	42.88	Ave	295	2.0	H	2.84	45.72	54.00	-8.28
2336.83	45.96	PK	160	1.1	V	-13.19	32.77	74.00	-41.23
2336.83	38.39	Ave	160	1.1	V	-13.19	25.20	54.00	-28.80
2384.18	42.85	PK	271	1.7	H	-13.14	29.71	74.00	-44.29
2384.18	38.68	Ave	271	1.7	H	-13.14	25.54	54.00	-28.46
2487.38	43.97	PK	184	1.1	V	-13.08	30.89	74.00	-43.11
2487.38	37.19	Ave	184	1.1	V	-13.08	24.11	54.00	-29.89



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Low Channel 2422MHz									
223.45	45.04	QP	85	1.7	H	-11.62	33.42	46.00	-12.58
223.45	38.53	QP	272	1.6	V	-11.62	26.91	46.00	-19.09
4844.00	49.47	PK	321	1.6	V	-1.06	48.41	74.00	-25.59
4844.00	39.05	Ave	321	1.6	V	-1.06	37.99	54.00	-16.01
7266.00	39.15	PK	326	1.1	H	1.33	40.48	74.00	-33.52
7266.00	41.86	Ave	326	1.1	H	1.33	43.19	54.00	-10.81
2344.90	45.08	PK	201	1.8	V	-13.19	31.89	74.00	-42.11
2344.90	37.83	Ave	201	1.8	V	-13.19	24.64	54.00	-29.36
2376.23	43.45	PK	276	2.0	H	-13.14	30.31	74.00	-43.69
2376.23	36.64	Ave	276	2.0	H	-13.14	23.50	54.00	-30.50
2496.66	43.85	PK	337	1.7	V	-13.08	30.77	74.00	-43.23
2496.66	38.89	Ave	337	1.7	V	-13.08	25.81	54.00	-28.19

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Middle Channel 2437MHz									
223.45	45.55	QP	158	1.2	H	-11.62	33.93	46.00	-12.07
223.45	38.83	QP	357	1.0	V	-11.62	27.21	46.00	-18.79
4874.00	48.59	PK	77	1.4	V	-0.62	47.97	74.00	-26.03
4874.00	38.95	Ave	77	1.4	V	-0.62	38.33	54.00	-15.67
7311.00	39.71	PK	9	1.1	H	2.21	41.92	74.00	-32.08
7311.00	42.85	Ave	9	1.1	H	2.21	45.06	54.00	-8.94
2315.15	46.63	PK	52	1.7	V	-13.19	33.44	74.00	-40.56
2315.15	39.49	Ave	52	1.7	V	-13.19	26.30	54.00	-27.70
2360.90	44.49	PK	160	1.7	H	-13.14	31.35	74.00	-42.65
2360.90	36.58	Ave	160	1.7	H	-13.14	23.44	54.00	-30.56
2494.47	44.06	PK	336	1.7	V	-13.08	30.98	74.00	-43.02
2494.47	36.11	Ave	336	1.7	V	-13.08	23.03	54.00	-30.97

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: High Channel 2452MHz									
223.45	44.90	QP	195	1.0	H	-11.62	33.28	46.00	-12.72
223.45	38.48	QP	194	1.6	V	-11.62	26.86	46.00	-19.14
4904.00	48.21	PK	228	1.9	V	-0.24	47.97	74.00	-26.03
4904.00	38.94	Ave	228	1.9	V	-0.24	38.70	54.00	-15.30
7356.00	38.97	PK	9	1.2	H	2.84	41.81	74.00	-32.19
7356.00	43.03	Ave	9	1.2	H	2.84	45.87	54.00	-8.13
2325.30	45.71	PK	54	1.6	V	-13.19	32.52	74.00	-41.48
2325.30	39.51	Ave	54	1.6	V	-13.19	26.32	54.00	-27.68
2385.35	43.64	PK	179	1.7	H	-13.14	30.50	74.00	-43.50
2385.35	36.69	Ave	179	1.7	H	-13.14	23.55	54.00	-30.45
2497.37	44.53	PK	274	1.0	V	-13.08	31.45	74.00	-42.55
2497.37	38.44	Ave	274	1.0	V	-13.08	25.36	54.00	-28.64

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

**BT BLE:****Test Frequency: 9KHz~26MHz**

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.021	25.17	QP	21.84	40.00	7.01	29.54	-22.53
15.730	24.96	QP	21.35	40.00	6.31	29.54	-23.23
25.680	26.18	QP	20.67	40.00	6.85	29.54	-22.69

**Test Frequency : 26MHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel 2402MHz									
268.32	36.89	QP	43	1.6	H	-13.35	23.54	46.00	-22.46
268.32	41.33	QP	254	2.0	V	-13.35	27.98	46.00	-18.02
4804.00	46.15	PK	157	1.5	V	-1.06	45.09	74.00	-28.91
4804.00	43.52	Ave	157	1.5	V	-1.06	42.46	54.00	-11.54
7206.00	40.62	PK	192	1.8	H	1.33	41.95	74.00	-32.05
7206.00	35.37	Ave	192	1.8	H	1.33	36.70	54.00	-17.30
2338.25	46.03	PK	0	1.6	V	-13.19	32.84	74.00	-41.16
2338.25	37.66	Ave	0	1.6	V	-13.19	24.47	54.00	-29.53
2351.09	42.79	PK	80	1.4	H	-13.14	29.65	74.00	-44.35
2351.09	38.87	Ave	80	1.4	H	-13.14	25.73	54.00	-28.27
2494.77	42.56	PK	151	1.9	V	-13.08	29.48	74.00	-44.52
2494.77	36.69	Ave	151	1.9	V	-13.08	23.61	54.00	-30.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Middle Channel 2440MHz									
268.32	37.95	QP	238	1.3	H	-13.35	24.60	46.00	-21.40
268.32	41.01	QP	267	1.9	V	-13.35	27.66	46.00	-18.34
4880.00	44.89	PK	360	1.3	V	-0.62	44.27	74.00	-29.73
4880.00	42.03	Ave	360	1.3	V	-0.62	41.41	54.00	-12.59
7320.00	40.19	PK	137	1.4	H	2.21	42.40	74.00	-31.60
7320.00	34.80	Ave	137	1.4	H	2.21	37.01	54.00	-16.99
2327.73	46.57	PK	147	1.9	V	-13.19	33.38	74.00	-40.62
2327.73	38.44	Ave	147	1.9	V	-13.19	25.25	54.00	-28.75
2355.25	42.65	PK	199	1.0	H	-13.14	29.51	74.00	-44.49
2355.25	36.37	Ave	199	1.0	H	-13.14	23.23	54.00	-30.77
2492.11	44.28	PK	126	2.0	V	-13.08	31.20	74.00	-42.80
2492.11	37.47	Ave	126	2.0	V	-13.08	24.39	54.00	-29.61

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel 2480MHz									
268.32	37.24	QP	286	1.3	H	-13.35	23.89	46.00	-22.11
268.32	40.89	QP	309	1.1	V	-13.35	27.54	46.00	-18.46
4960.00	43.57	PK	319	1.3	V	-0.24	43.33	74.00	-30.67
4960.00	43.19	Ave	319	1.3	V	-0.24	42.95	54.00	-11.05
7440.00	40.98	PK	88	1.5	H	2.84	43.82	74.00	-30.18
7440.00	34.81	Ave	88	1.5	H	2.84	37.65	54.00	-16.35
2331.16	46.89	PK	359	1.8	V	-13.19	33.70	74.00	-40.30
2331.16	39.59	Ave	359	1.8	V	-13.19	26.40	54.00	-27.60
2389.70	43.33	PK	211	1.9	H	-13.14	30.19	74.00	-43.81
2389.70	37.80	Ave	211	1.9	H	-13.14	24.66	54.00	-29.34
2498.57	44.35	PK	323	1.3	V	-13.08	31.27	74.00	-42.73
2498.57	37.46	Ave	323	1.3	V	-13.08	24.38	54.00	-29.62

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247  
Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016  
Test Result: PASS  
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 1GHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

Above 1GHz:

For WIFI mode

RBW = 100KHz, VBW = 100KHz, Sweep = auto  
Detector function = peak, Trace = max hold

For BLE mode


RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 10.2 Test Result


9KHz – 30MHz

802.11b

Low Channel

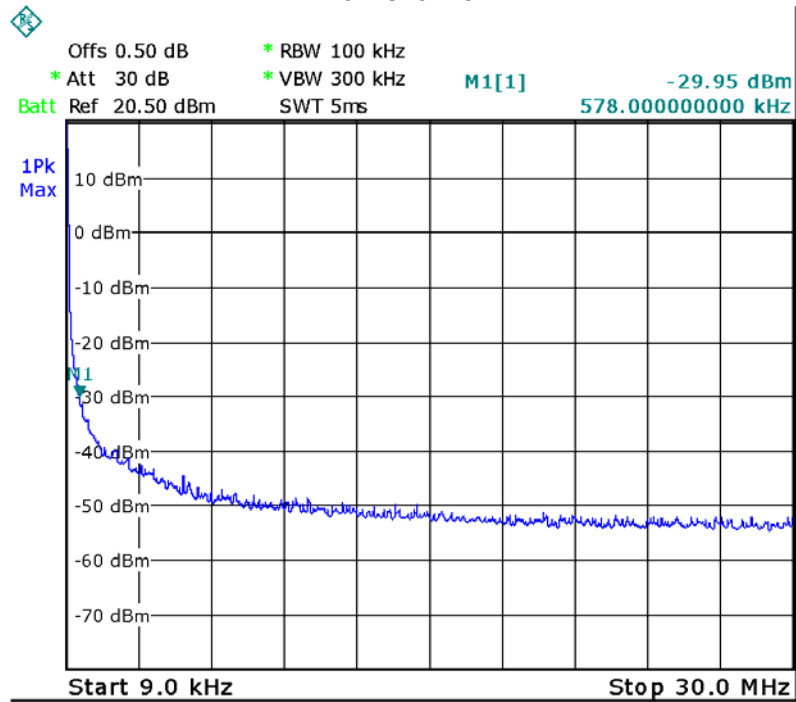


Middle Channel

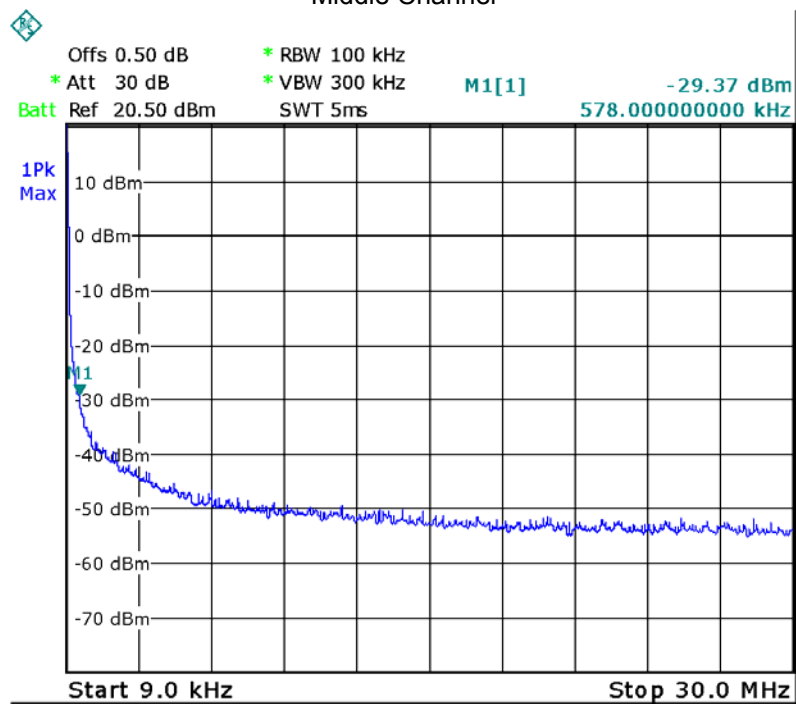




### High Channel

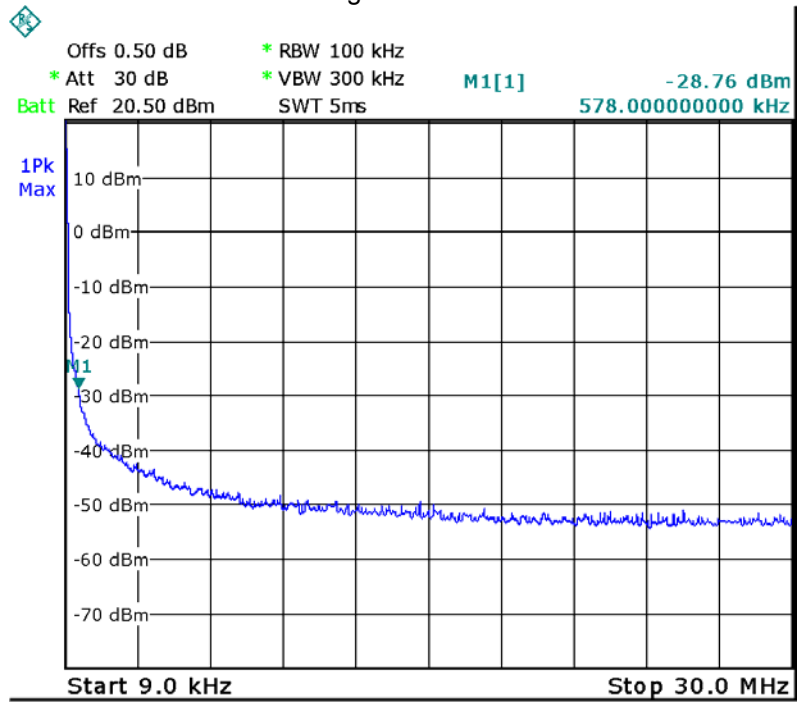


### 802.11g


### Low Channel

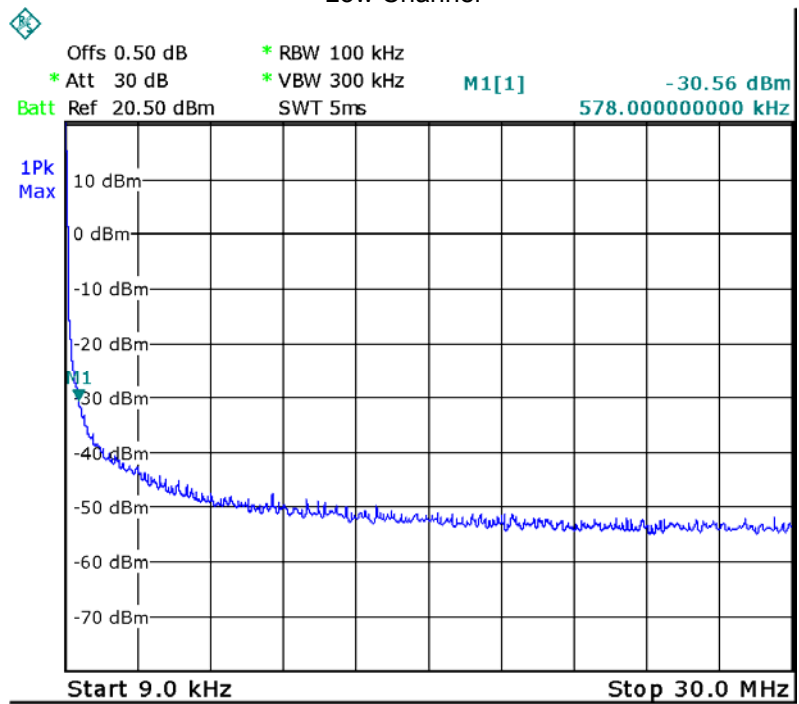

### Middle Channel

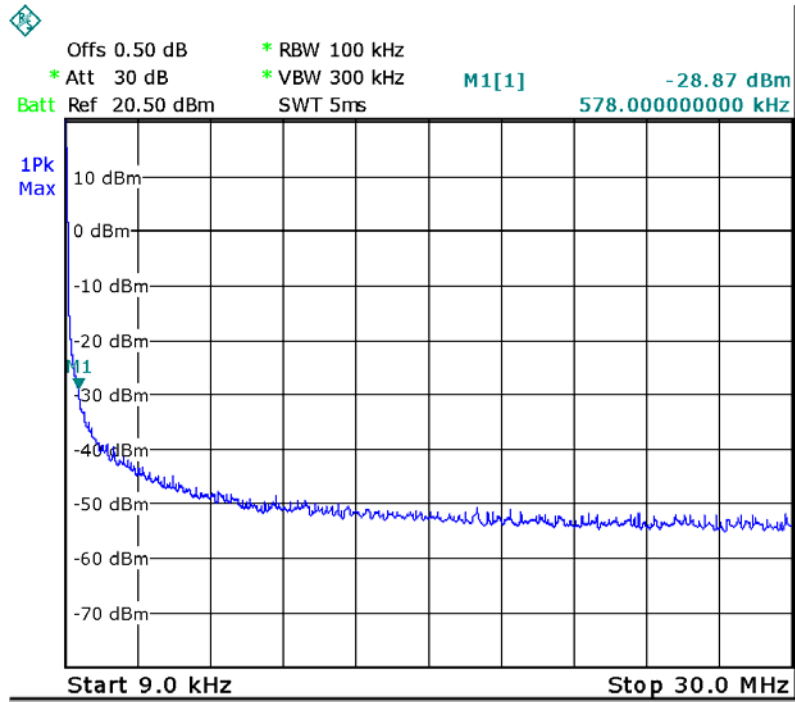


### High Channel

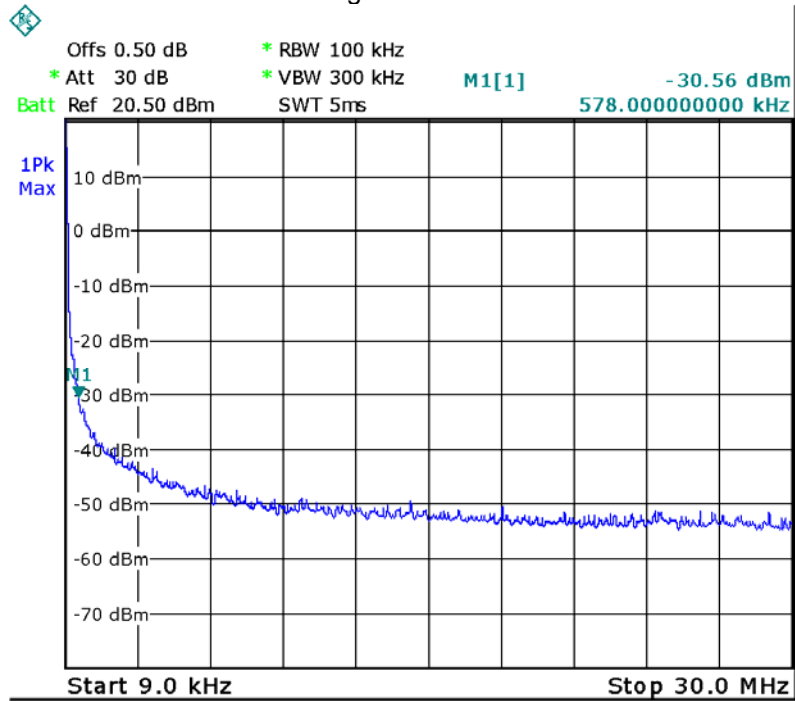


### 802.11n HT20


#### Low Channel

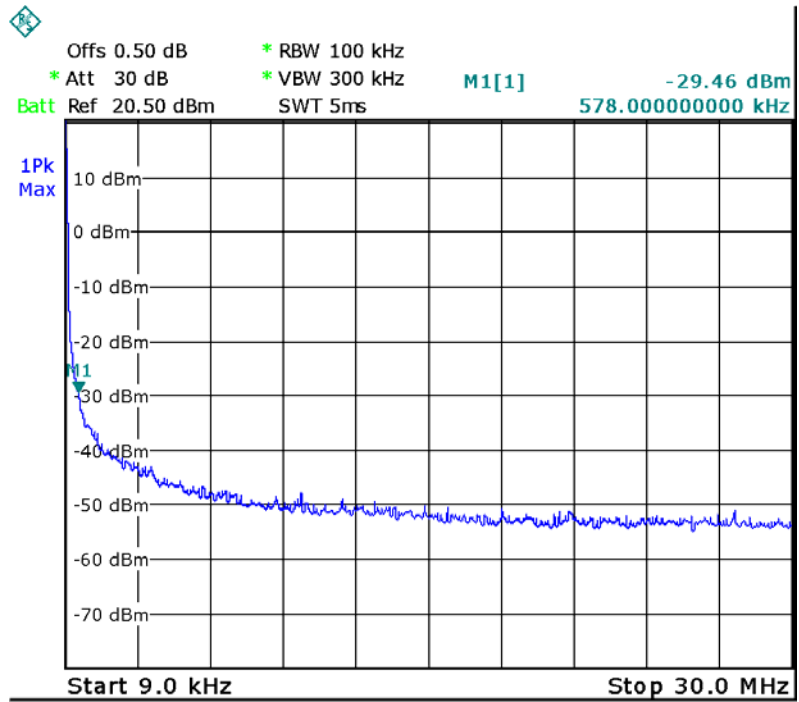

#### Middle Channel

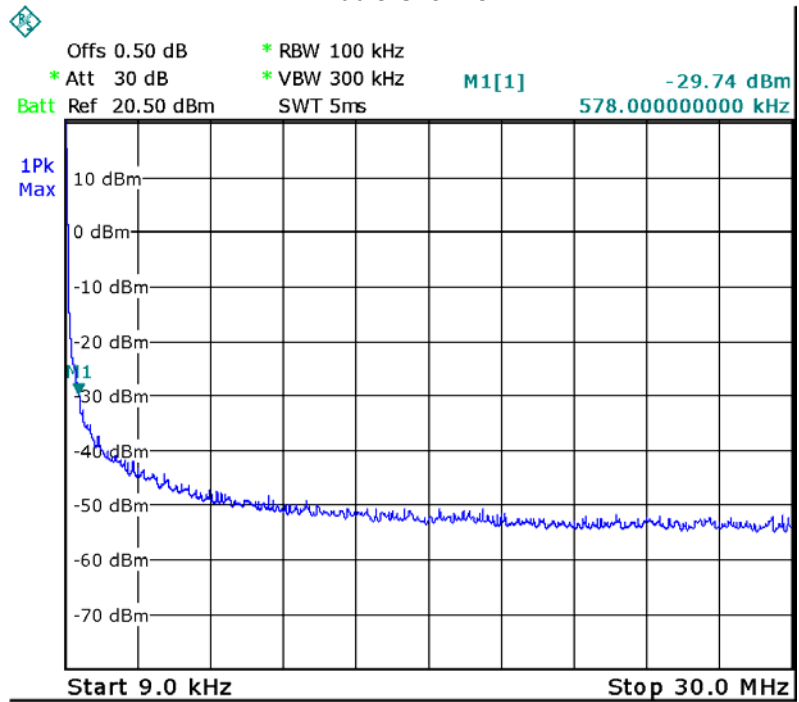




### High Channel

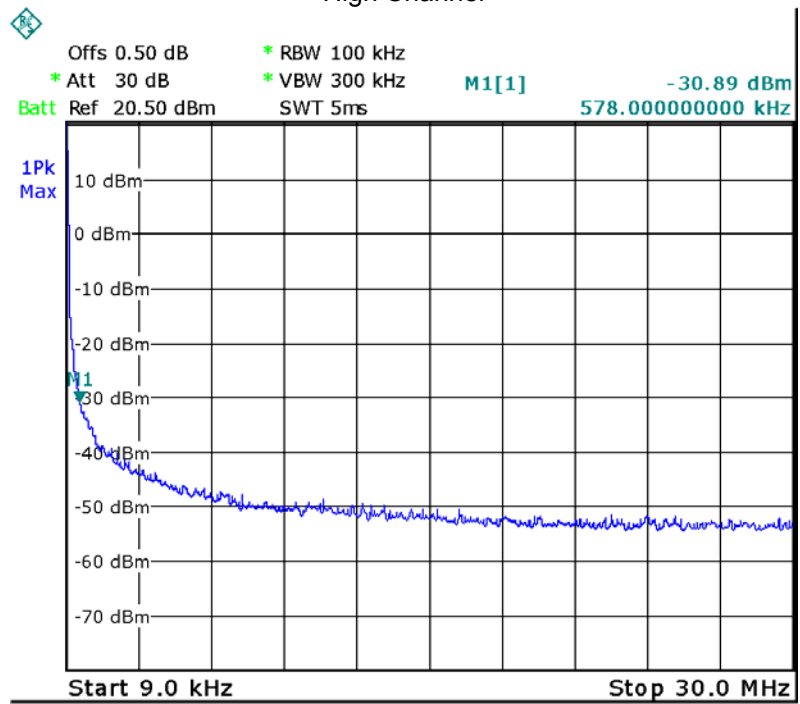


### 802.11n HT40

#### Low Channel

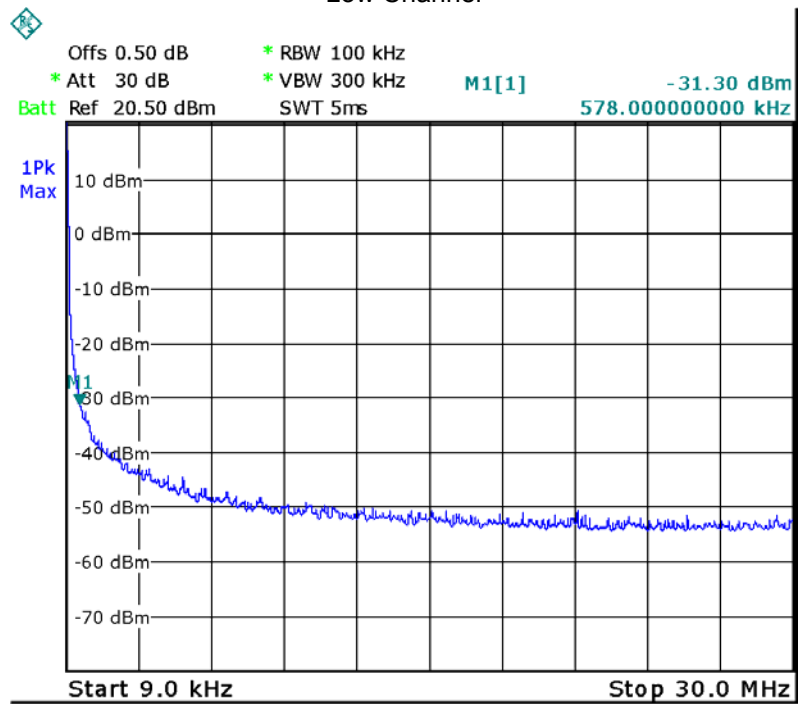


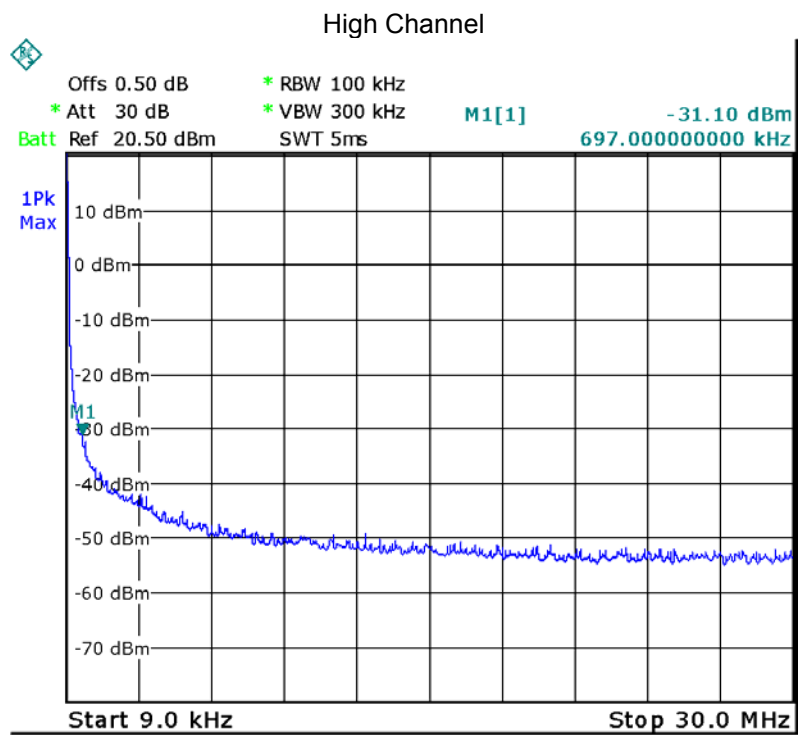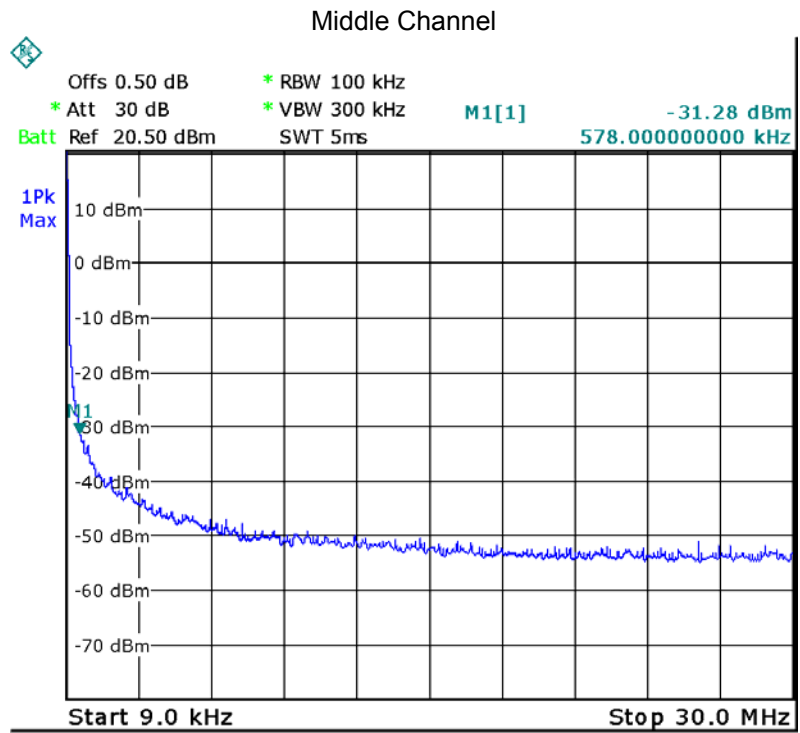


### BLE Low Channel

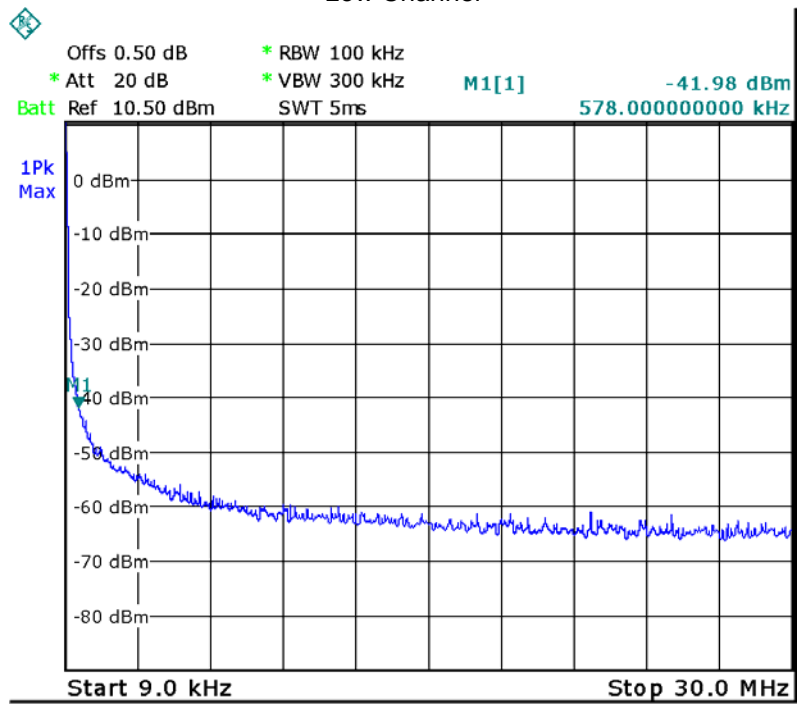

### Middle Channel

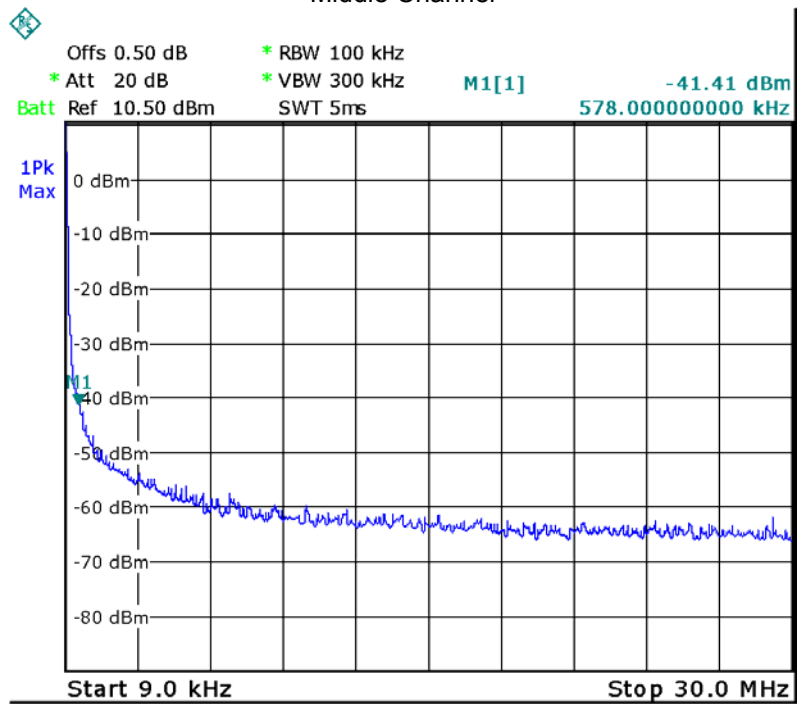

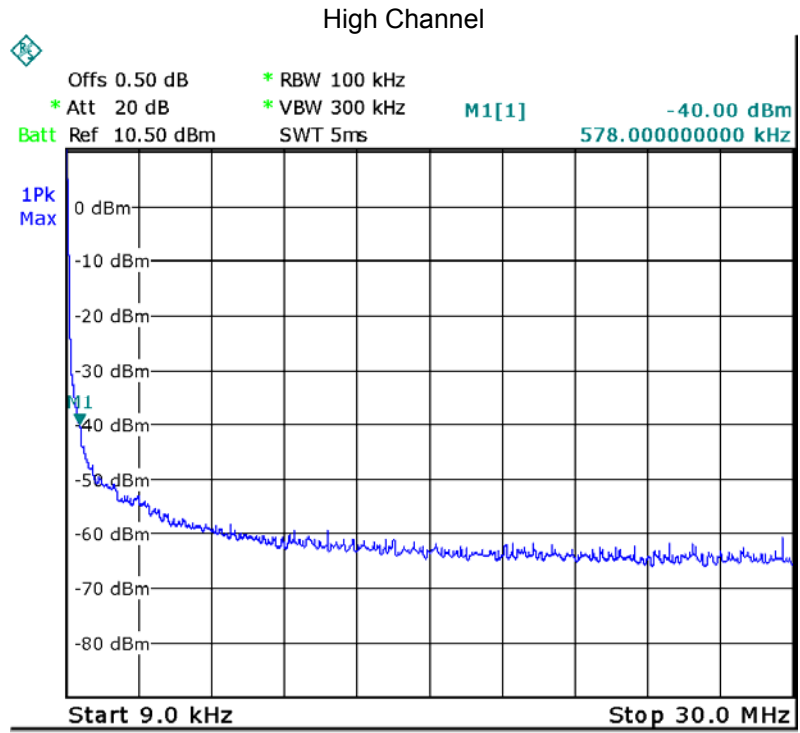


Above 30MHz

802.11b


Low Channel

Fundamental

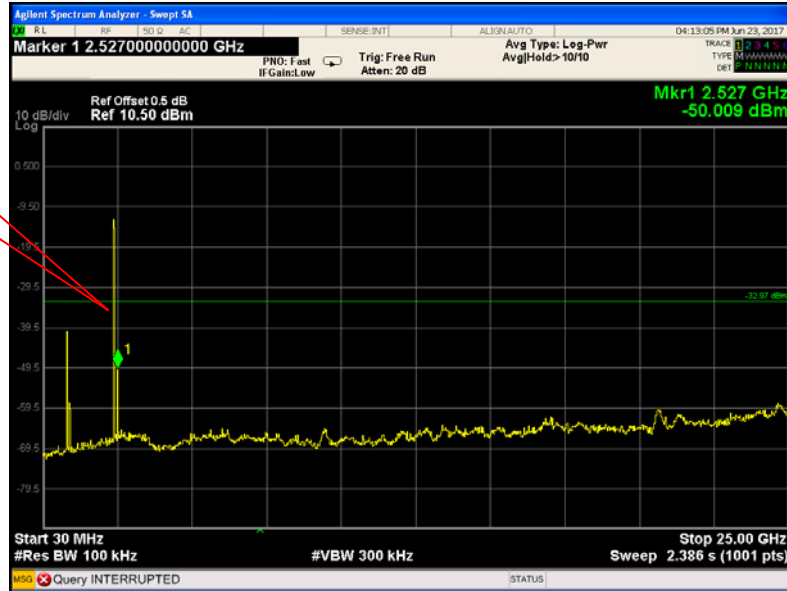

Middle Channel


Fundamental

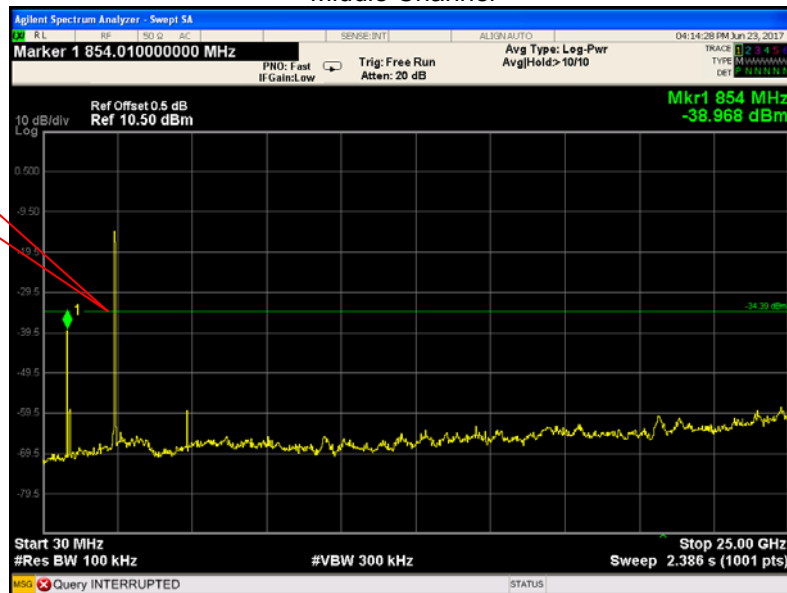



### High Channel


Fundamental

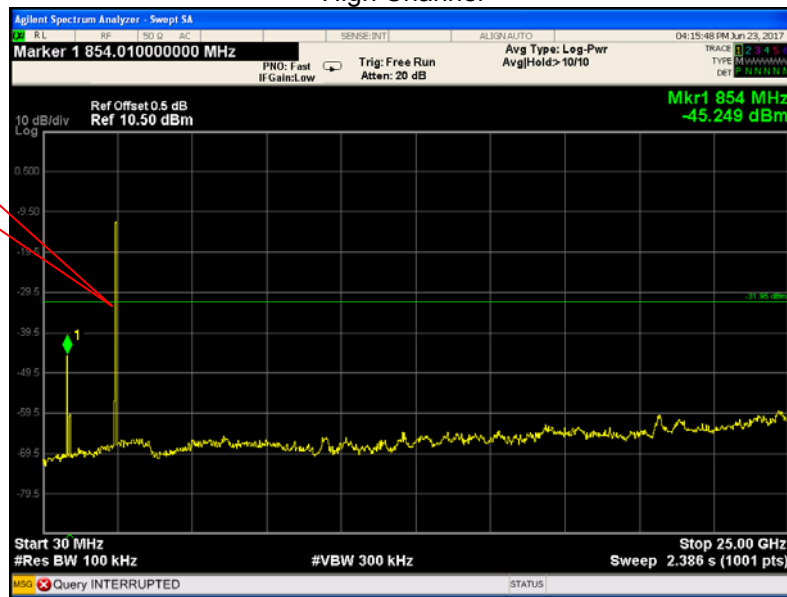

### 802.11g


### Low Channel

Fundamental

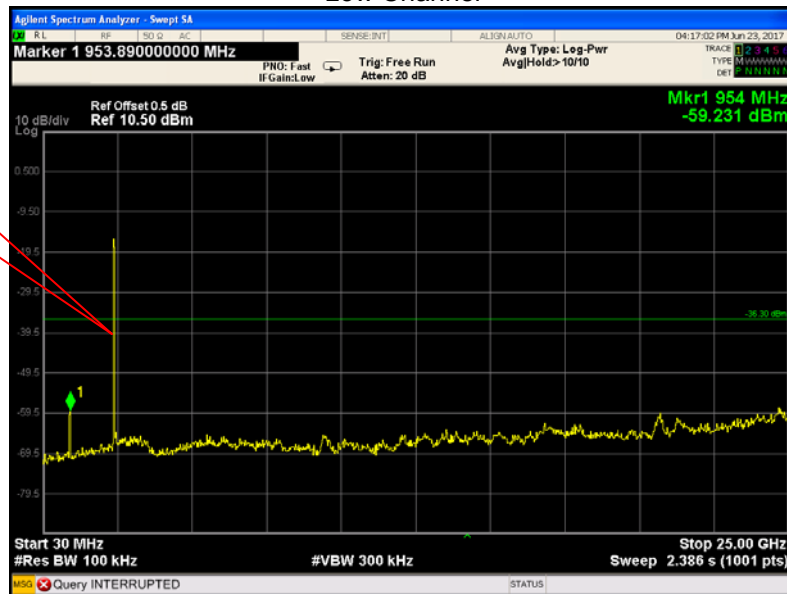


Middle Channel

Fundamental

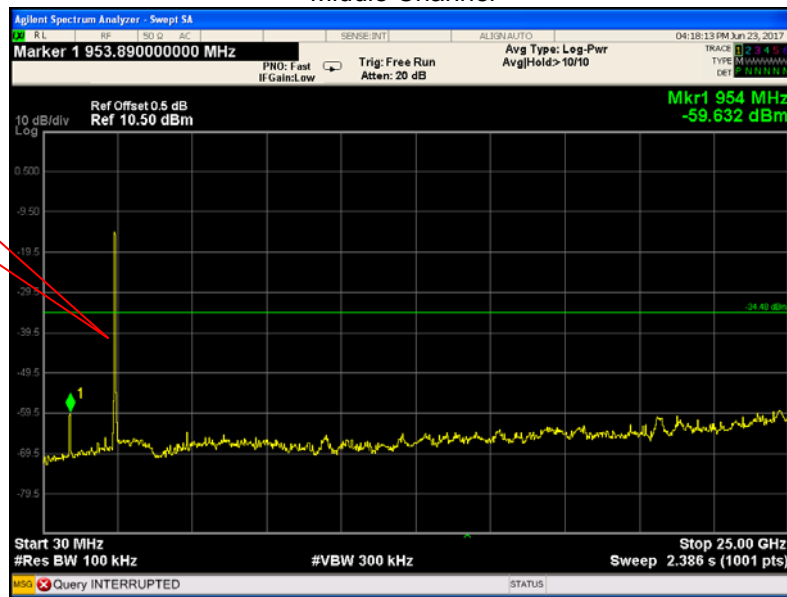

High Channel


Fundamental

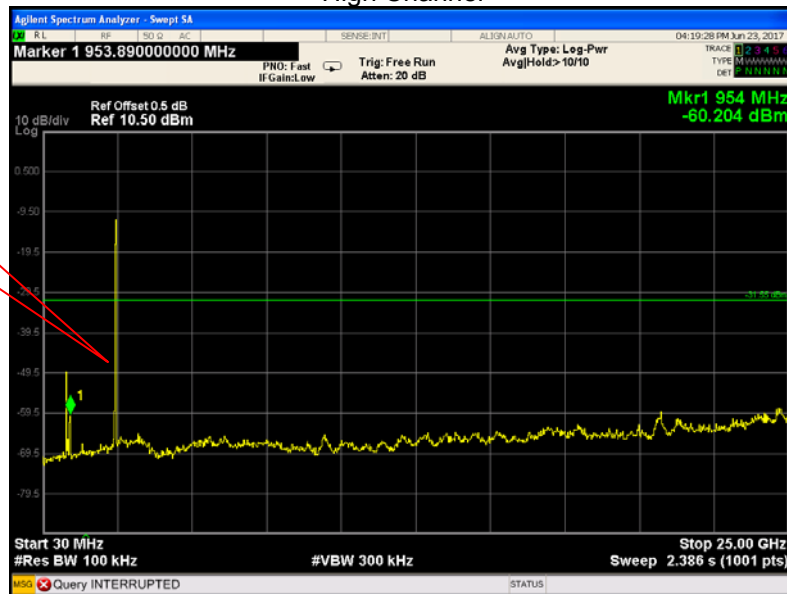

802.11n HT20


Low Channel

Fundamental

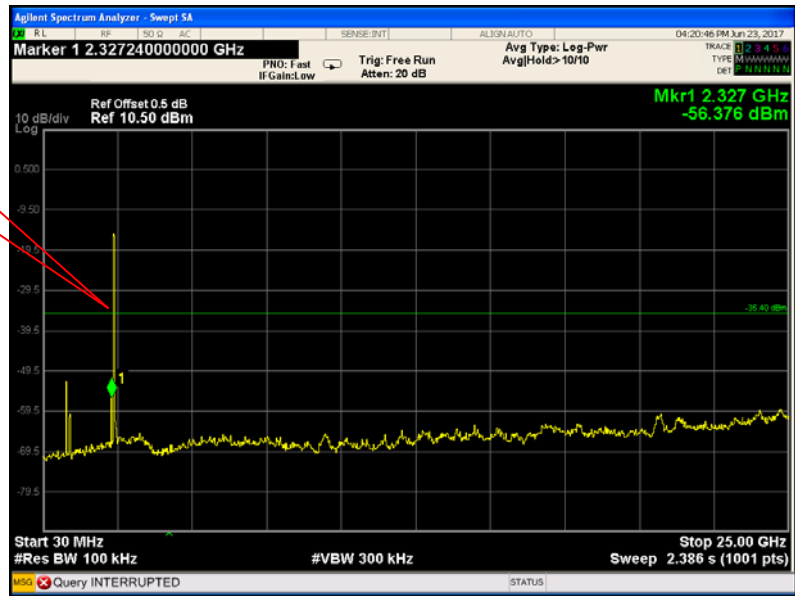


Middle Channel

Fundamental

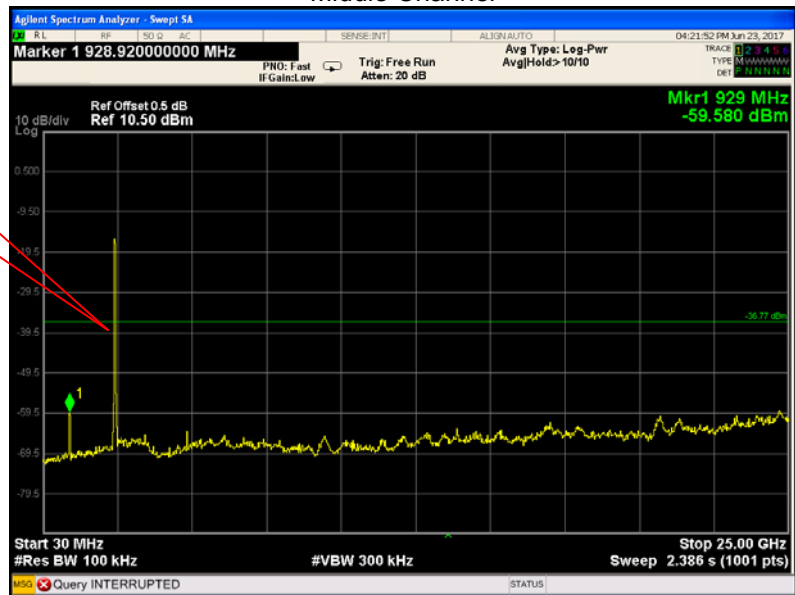

### High Channel


Fundamental

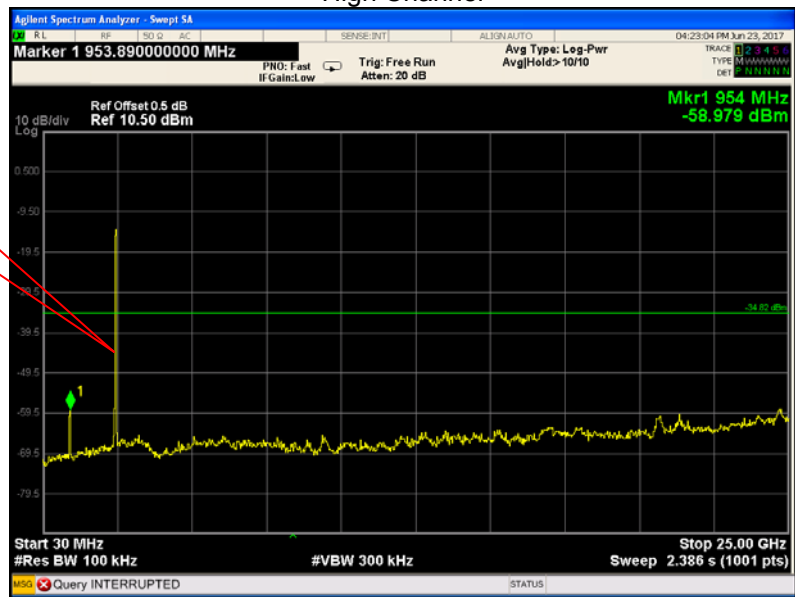

### 802.11n HT40


#### Low Channel

Fundamental

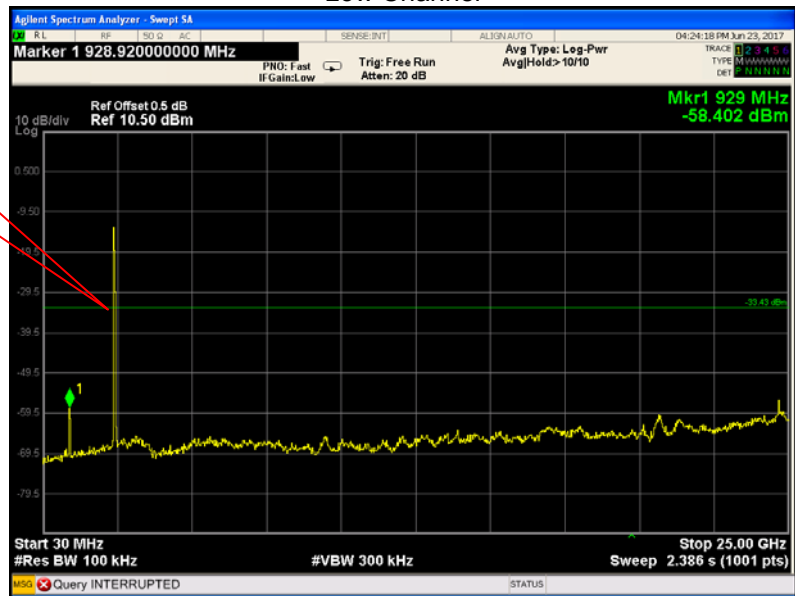


Middle Channel

Fundamental

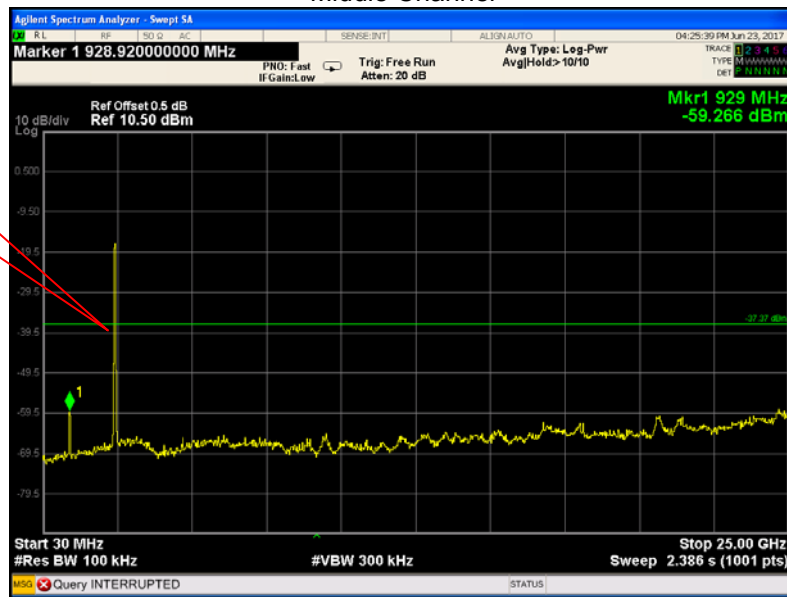


High Channel

Fundamental

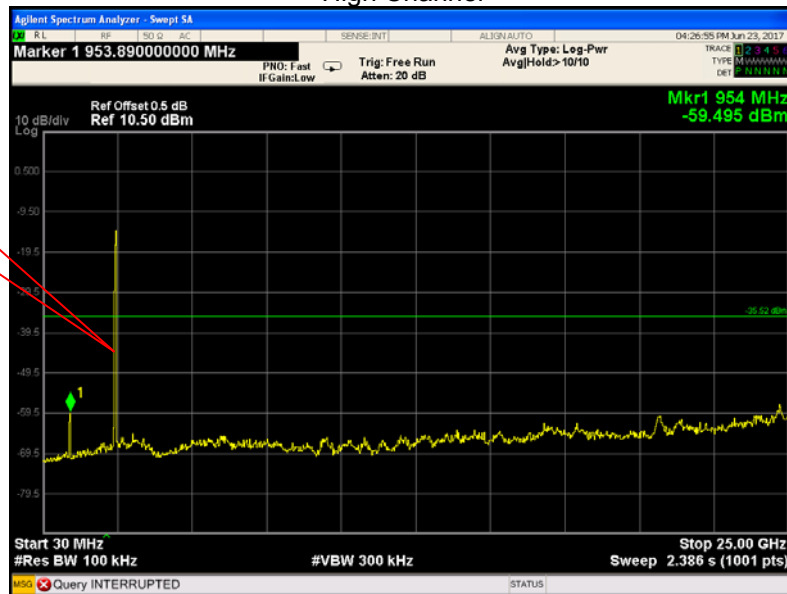


BLE  
Low Channel

Fundamental

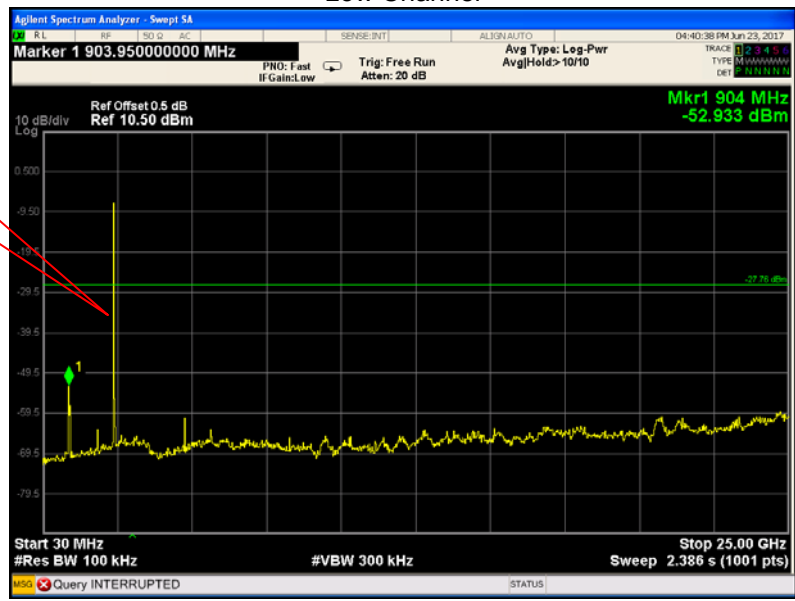


Middle Channel

Fundamental

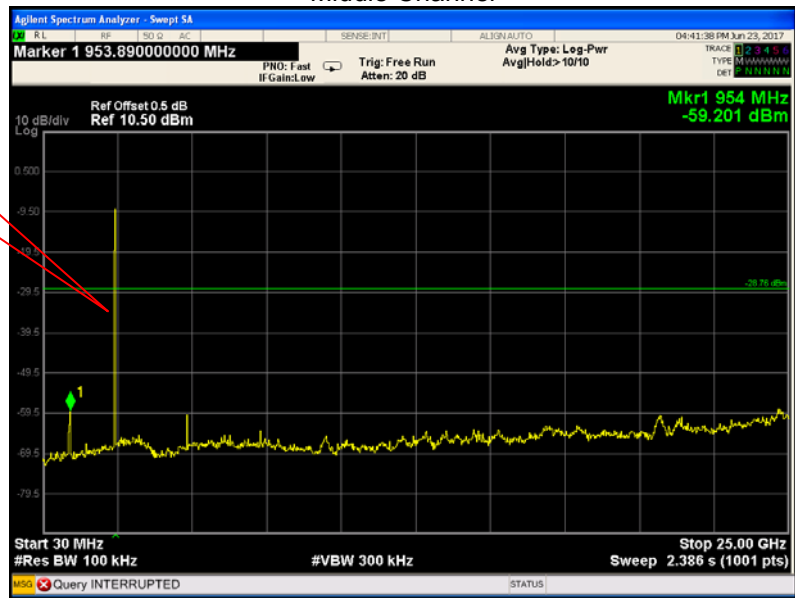

High Channel

Fundamental

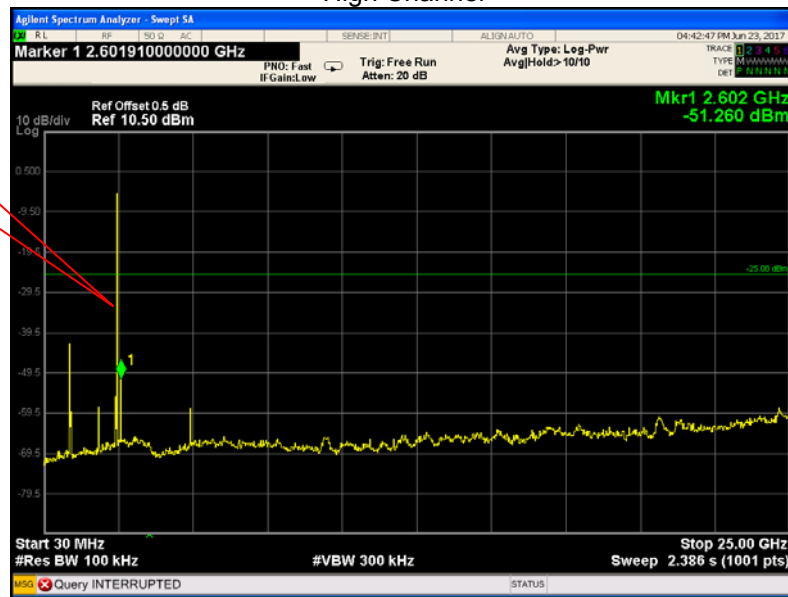

## 11 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



### 11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.




### 11.2 Test Result


Test result plots shown as follows:

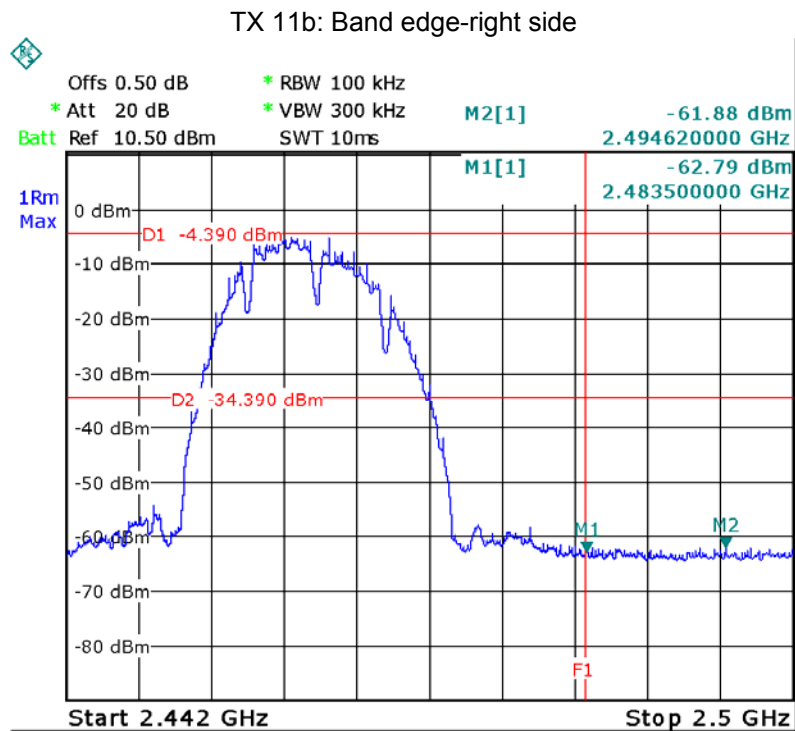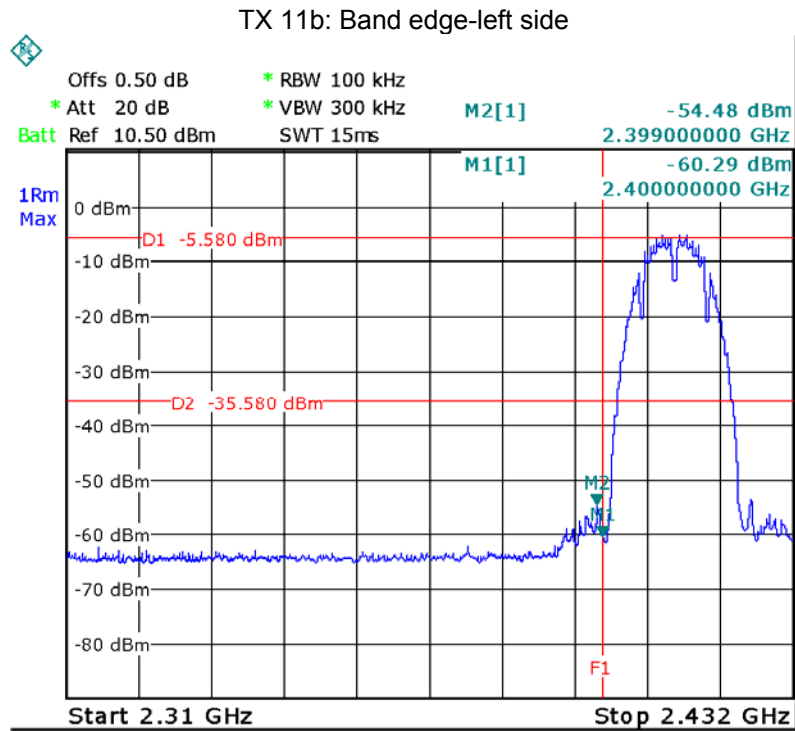


TX 11g: Band edge-left side

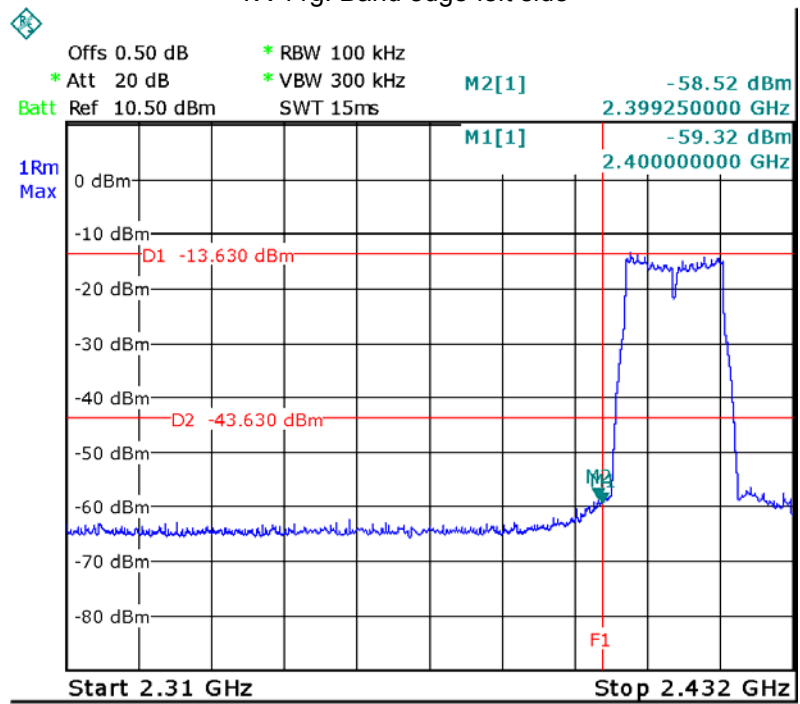


TX 11g: Band edge-right side

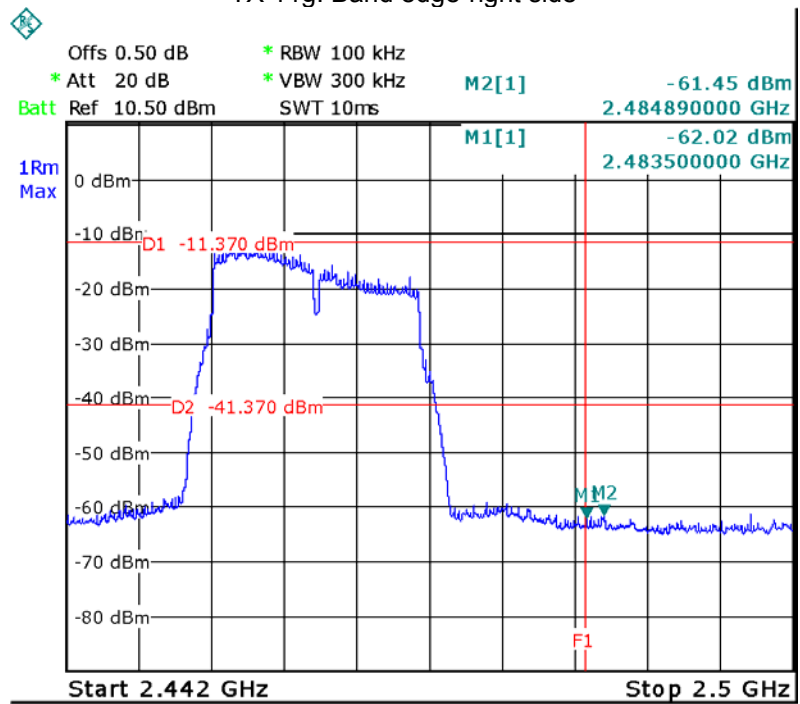


TX 11n HT20: Band edge-left side

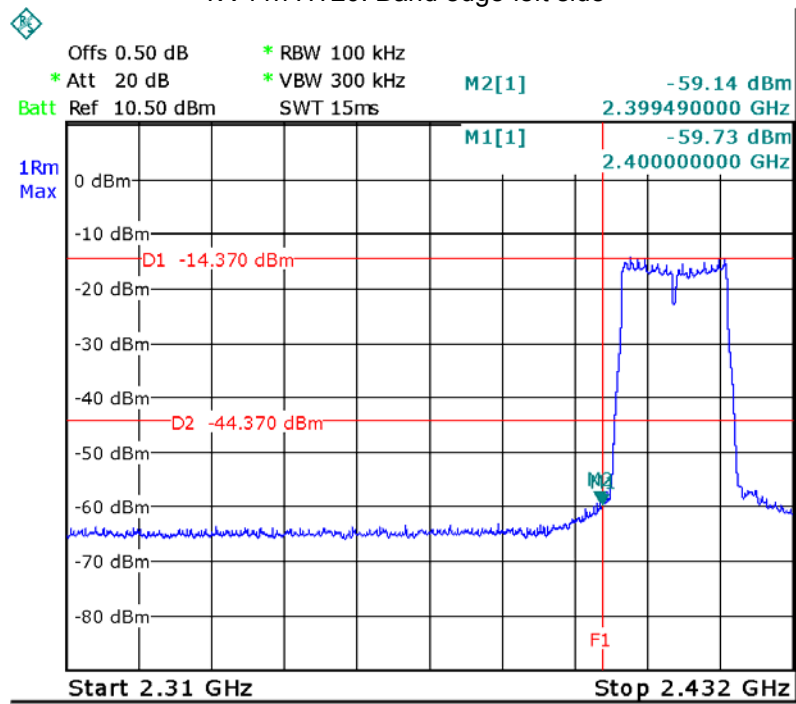


TX 11n HT20: Band edge-right side

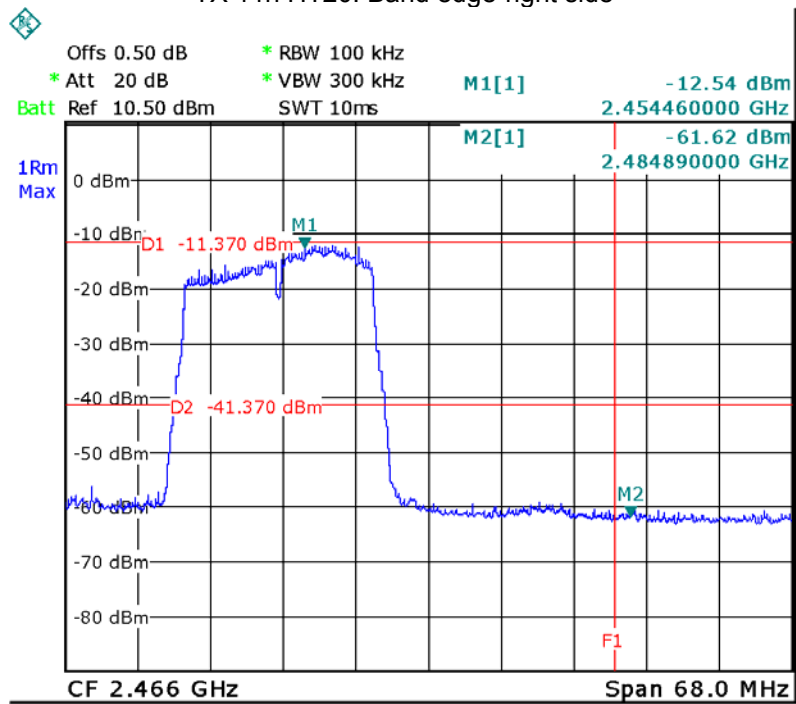


TX 11n HT40: Band edge-left side

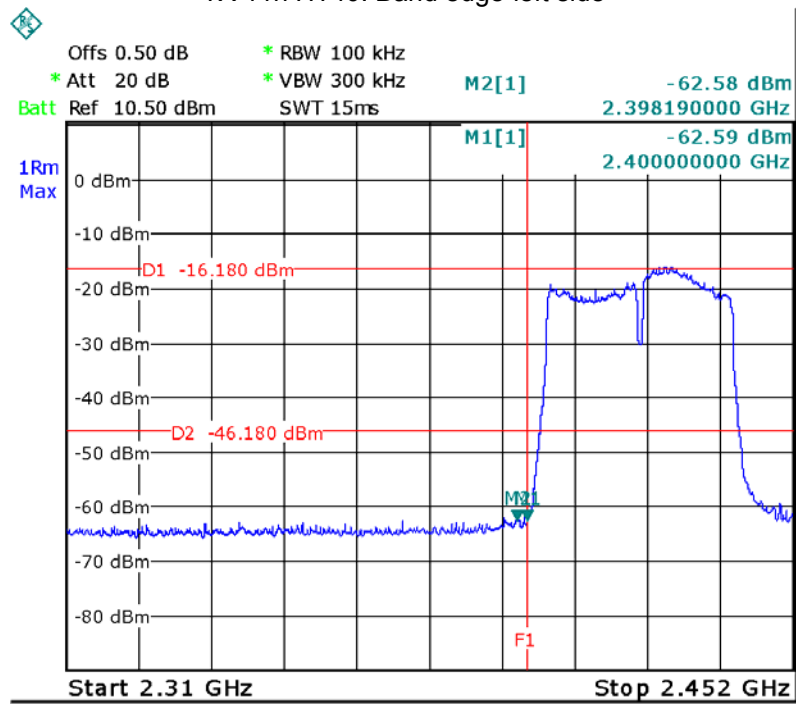


TX 11n HT40: Band edge-right side

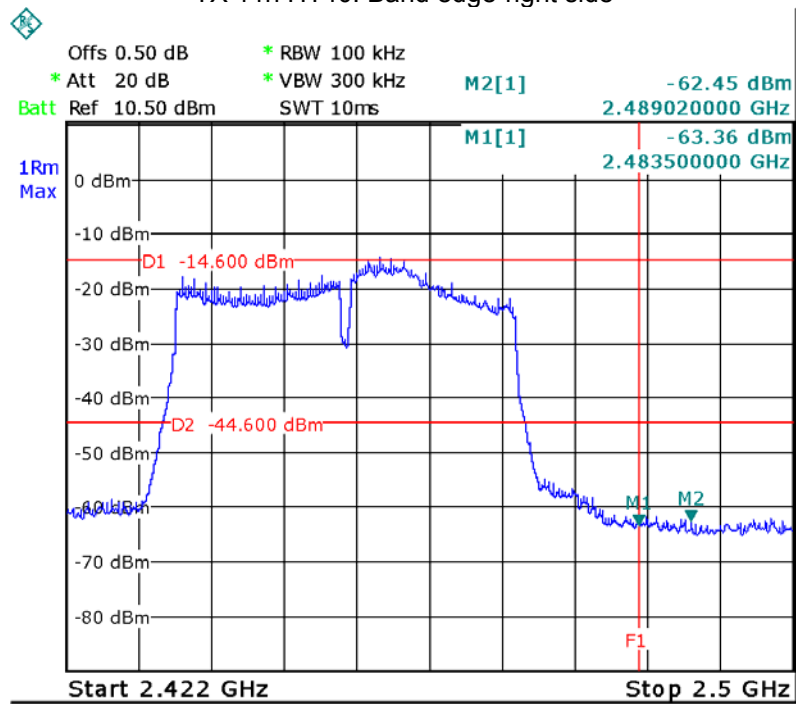

BLE: Band edge-left side

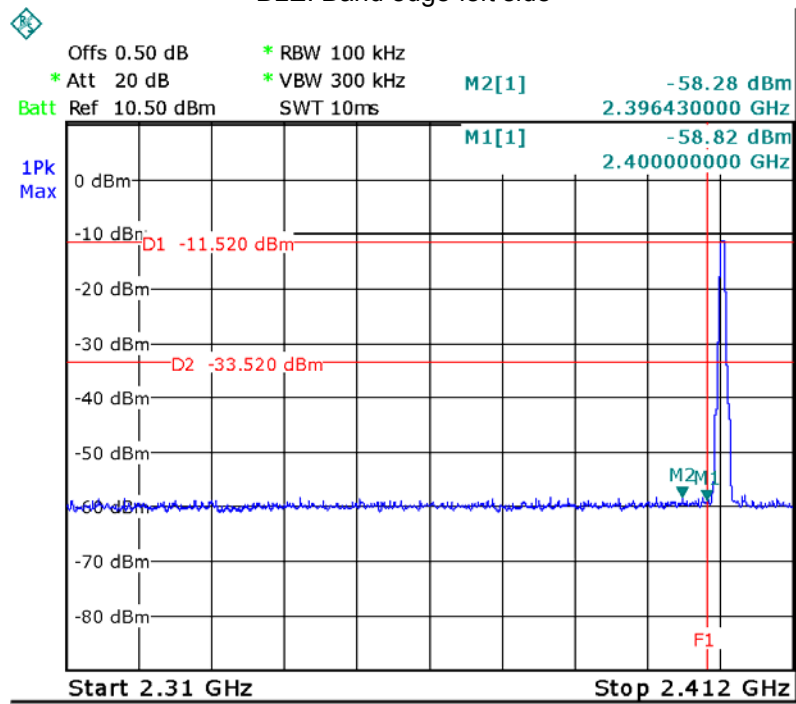

BLE: Band edge-right side

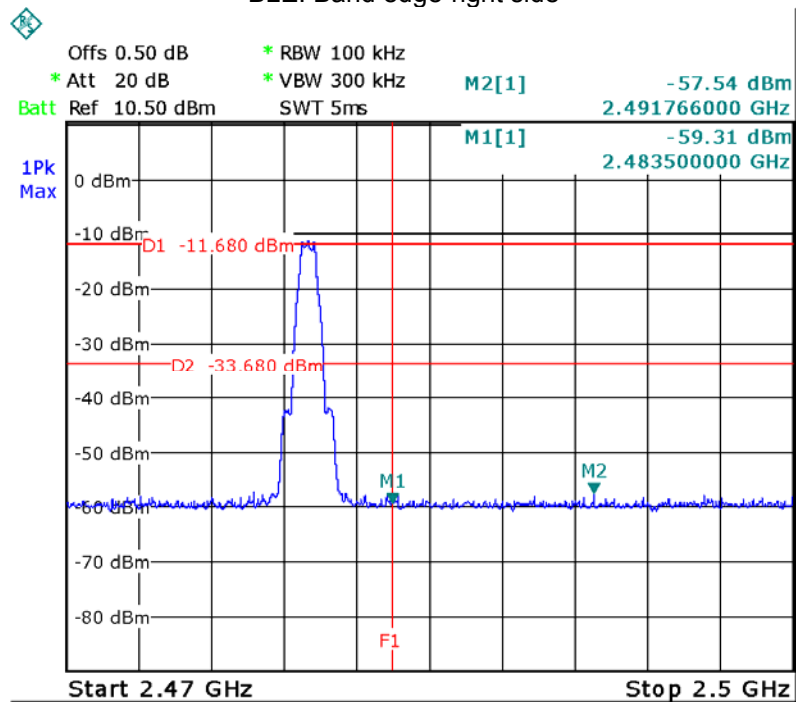

## 12 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016



### 12.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 12.2 Test Result:



Operation mode	Test Channel	Bandwidth (MHz)	Limit (kHz)
TX 11b	Channel 1	10.092	500
	Channel 6	10.092	500
	Channel 11	10.092	500
TX 11g	Channel 1	16.417	500
	Channel 6	16.467	500
	Channel 11	16.417	500
TX 11n HT20	Channel 1	17.623	500
	Channel 6	17.623	500
	Channel 11	17.623	500
TX 11n HT40	Channel 3	36.120	500
	Channel 6	36.120	500
	Channel 9	36.120	500
BLE	Channel 0	0.725	500
	Channel 19	0.725	500
	Channel 39	0.725	500



Test result plot:

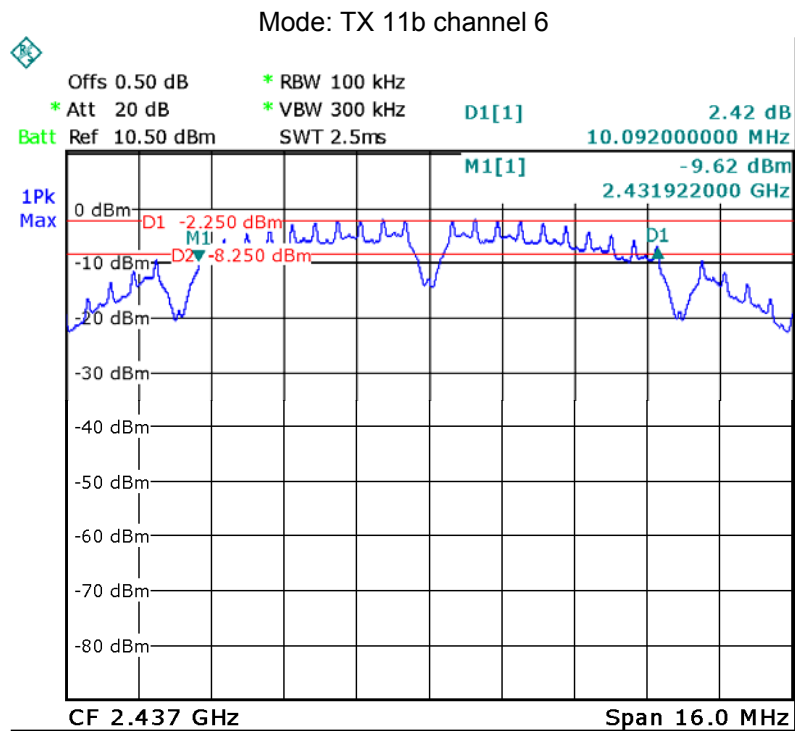
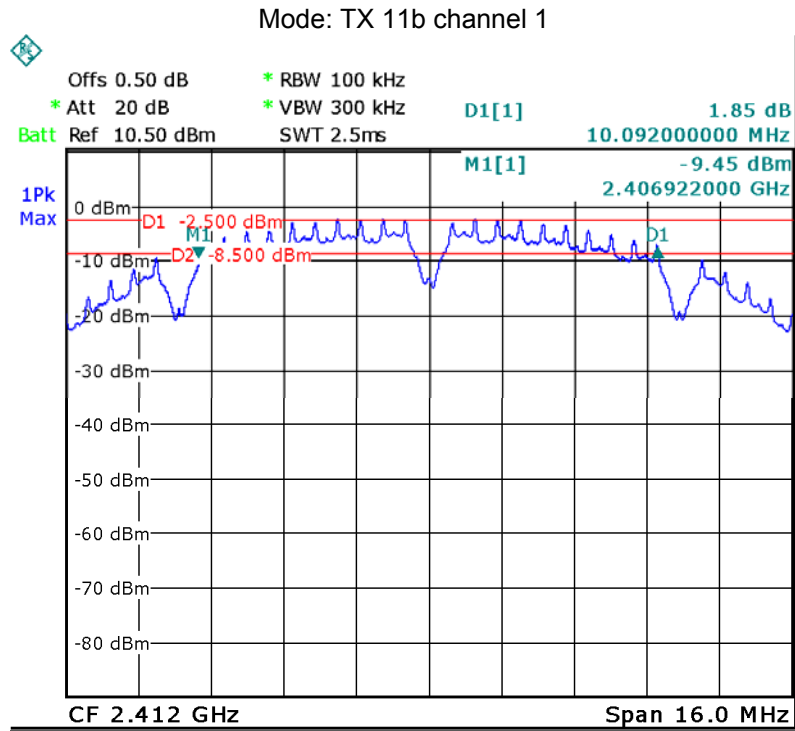


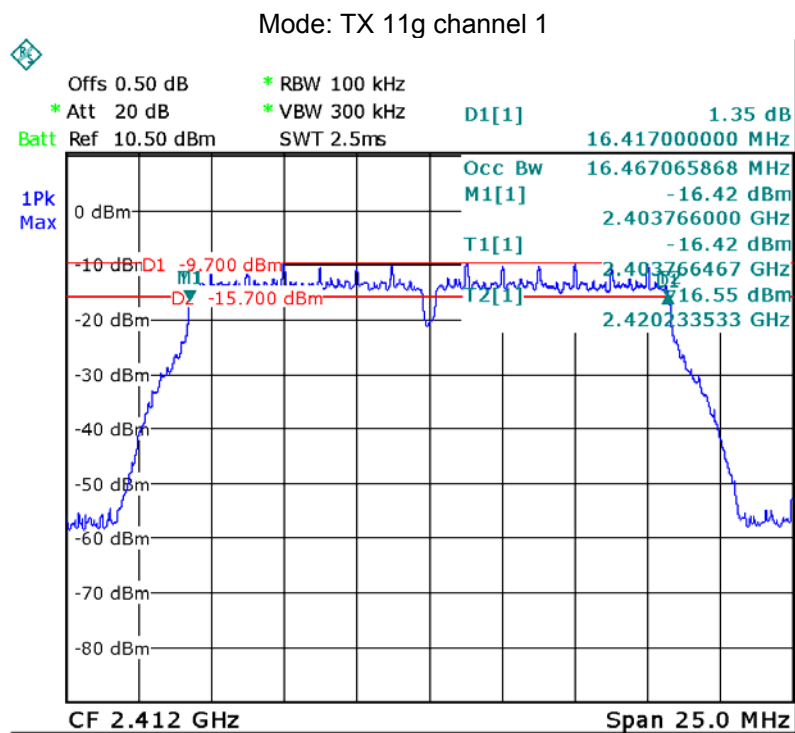
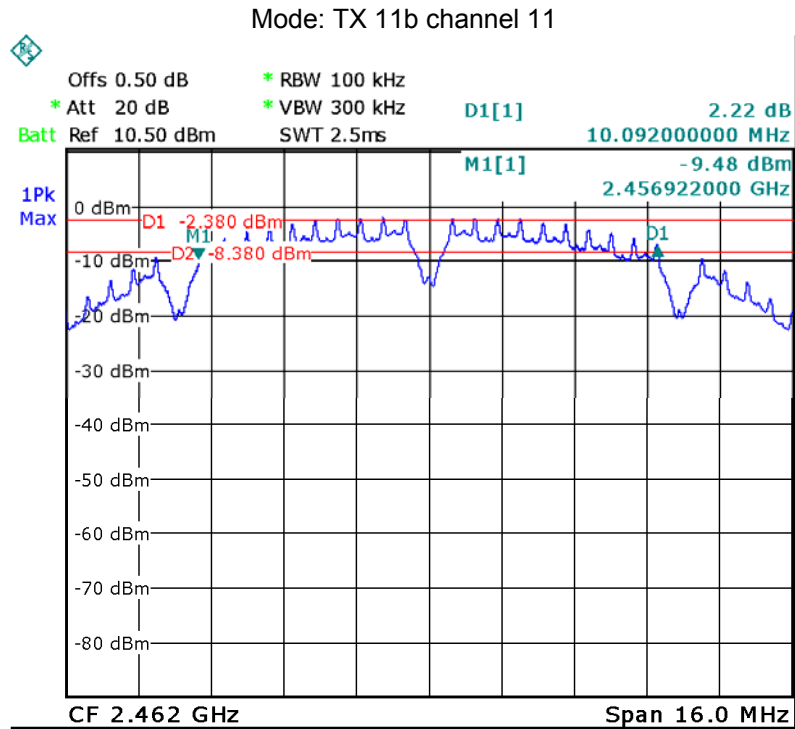




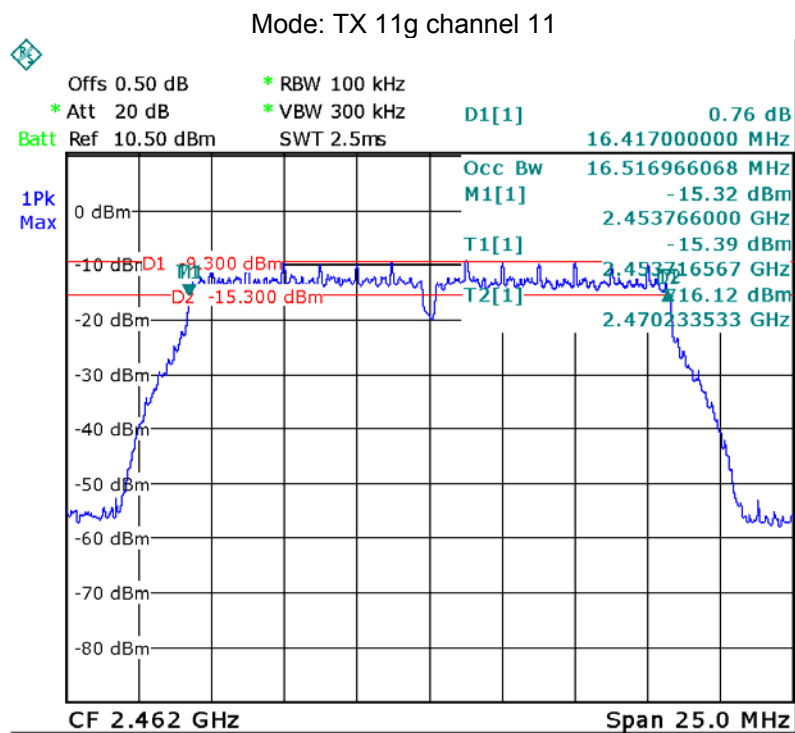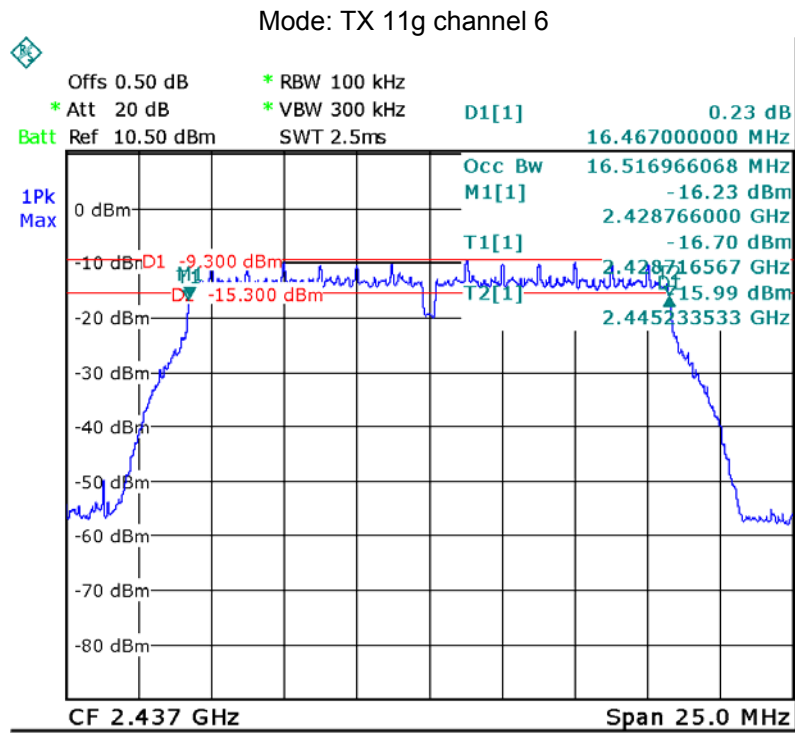


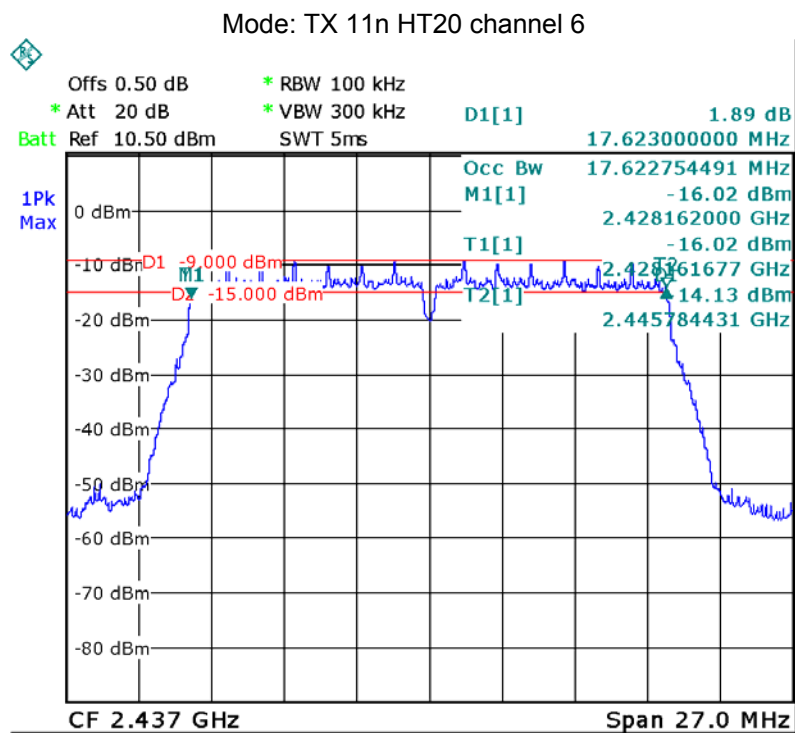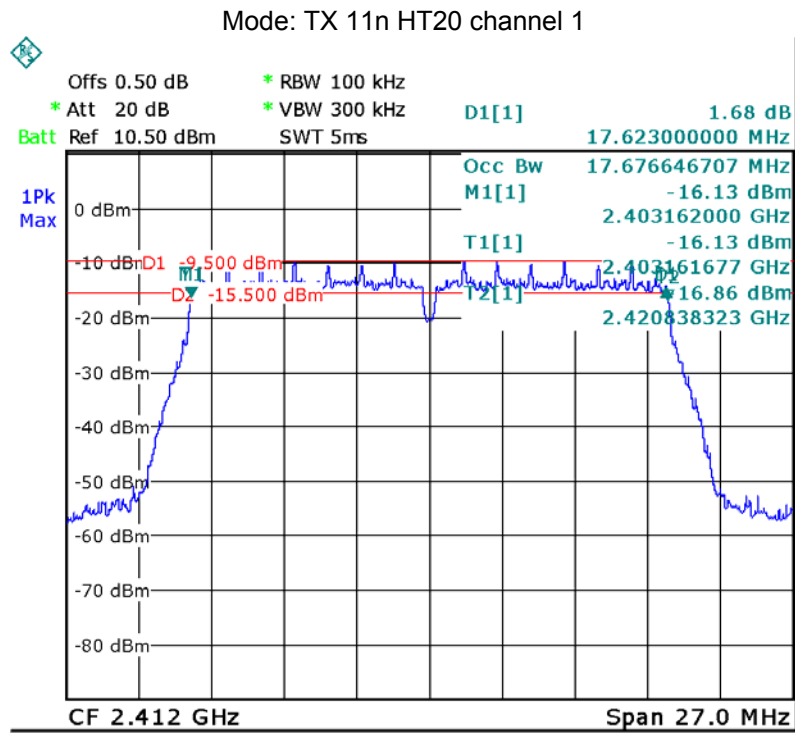

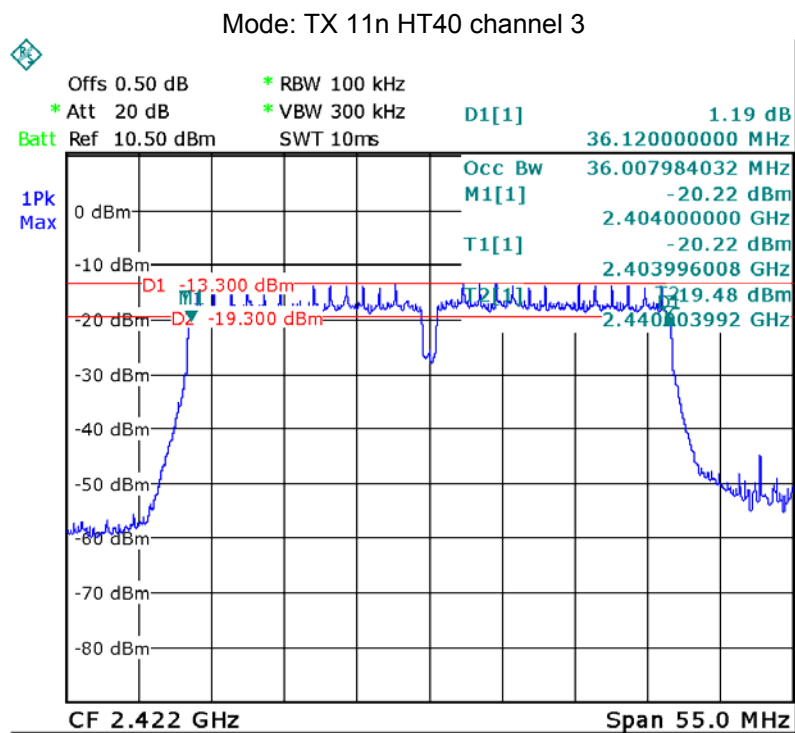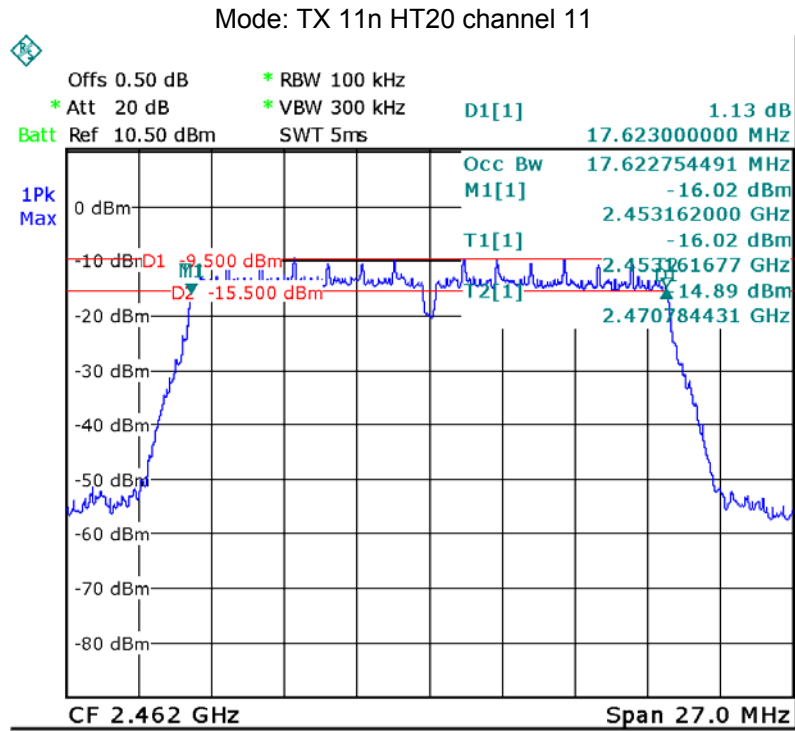


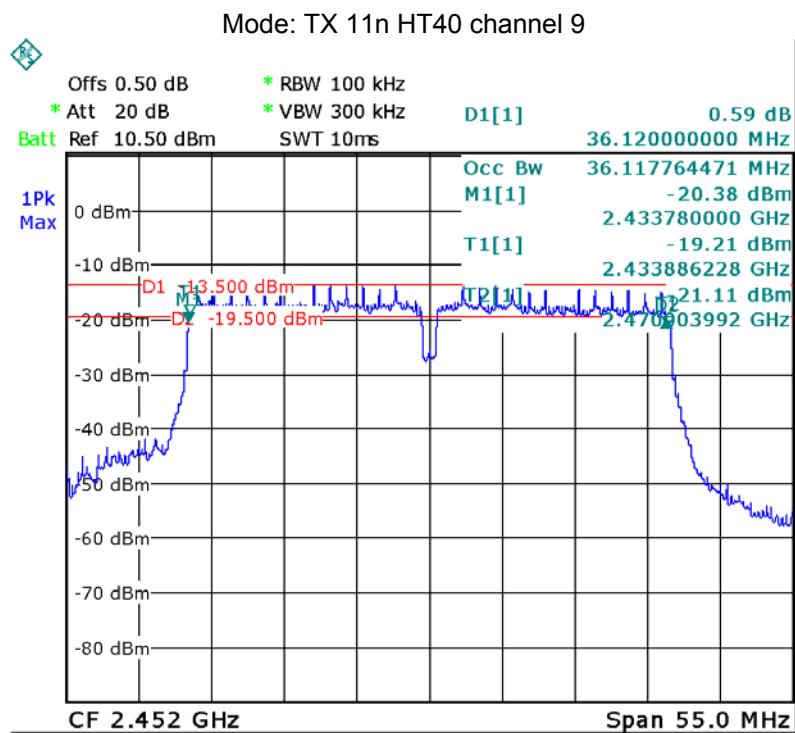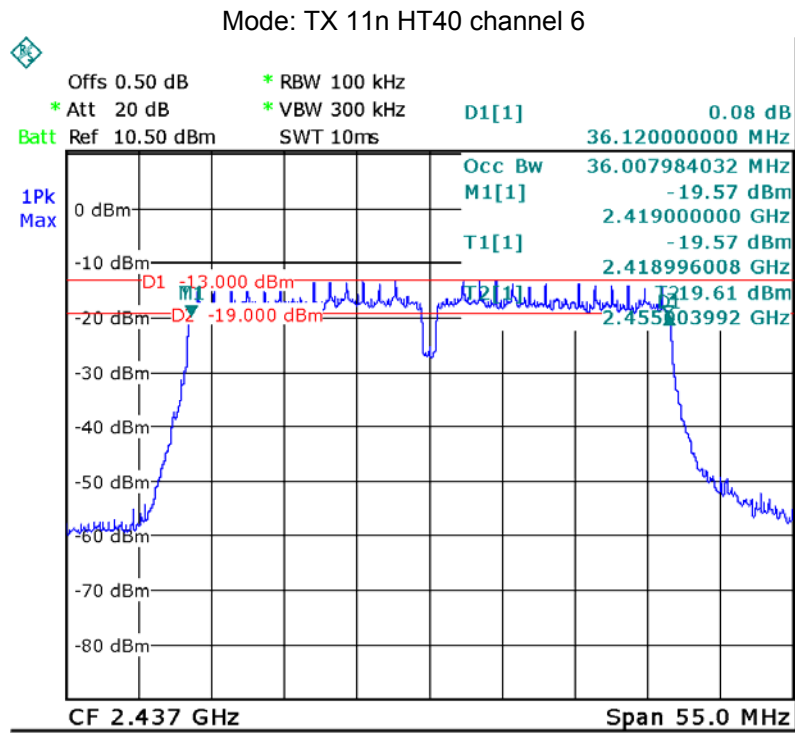


BLE: channel 0

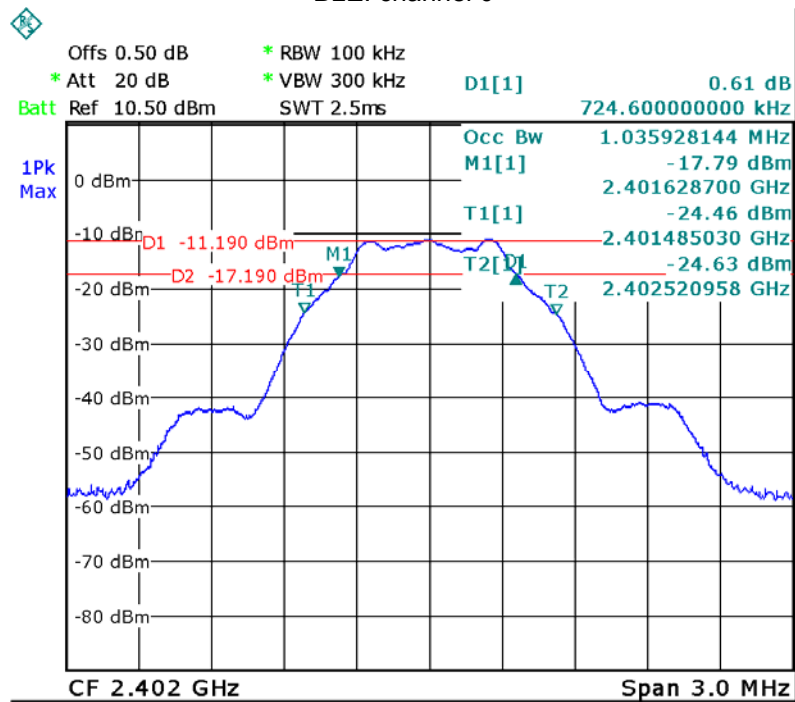

BLE: channel 19

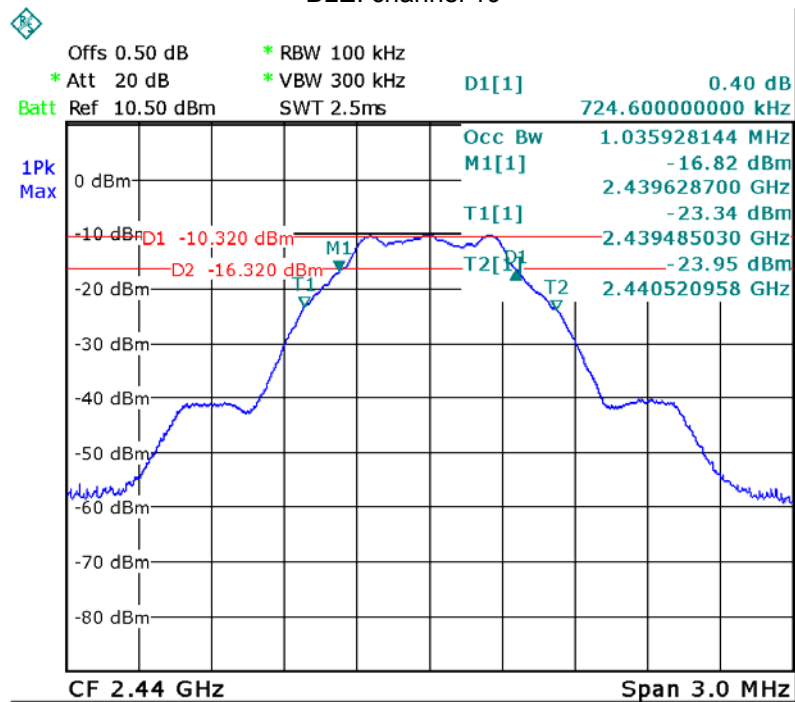

BLE: channel 39

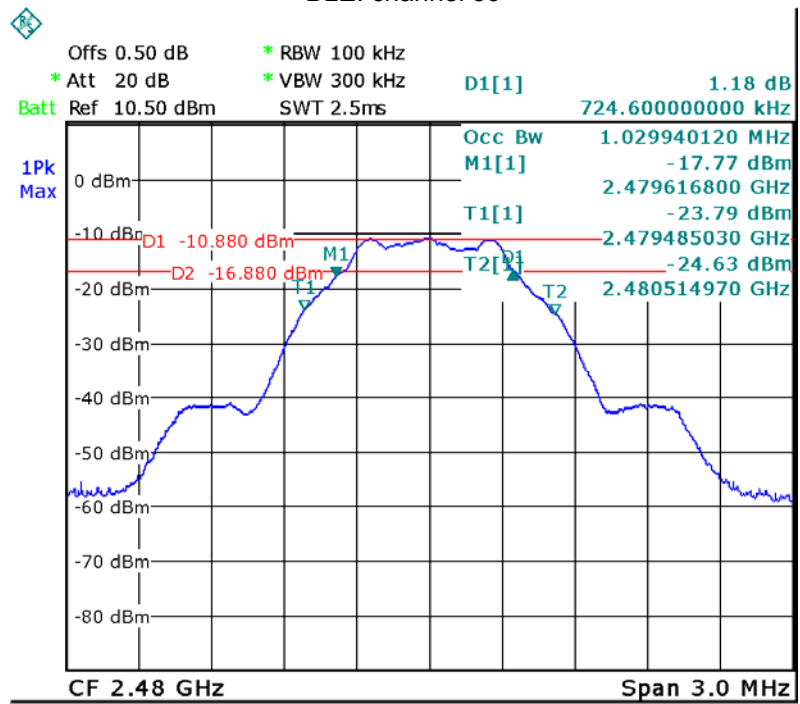

## 13 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

### 13.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the  $RBW \geq$  DTS bandwidth.
- b) Set  $VBW \geq 3 \times RBW$ .
- c) Set  $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the  $RBW = 1$  MHz.
- b) Set the  $VBW \geq 3 \times RBW$
- c) Set the  $span \geq 1.5 \times$  DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.


**13.2 Test Result:**

<b>Operation mode</b>	<b>Channel Frequency (MHz)</b>	<b>Maximum Peak Output Power (dBm)</b>	<b>Limit</b>
TX 11b	Low-2412	9.13	1W/30dBm
	Middle-2437	9.20	1W/30dBm
	High-2462	9.22	1W/30dBm
TX 11g	Low-2412	9.38	1W/30dBm
	Middle-2437	9.21	1W/30dBm
	High-2462	9.12	1W/30dBm
TX 11n HT20	Low-2412	9.35	1W/30dBm
	Middle-2437	9.04	1W/30dBm
	High-2462	9.38	1W/30dBm
TX 11n HT40	Low-2422	9.50	1W/30dBm
	Middle-2437	9.33	1W/30dBm
	High-2452	9.20	1W/30dBm
BLE	Low-2402	-9.86	1W/30dBm
	Middle-2440	-9.23	1W/30dBm
	High-2480	-9.80	1W/30dBm




### Test Plot


Mode: TX 11b channel 1

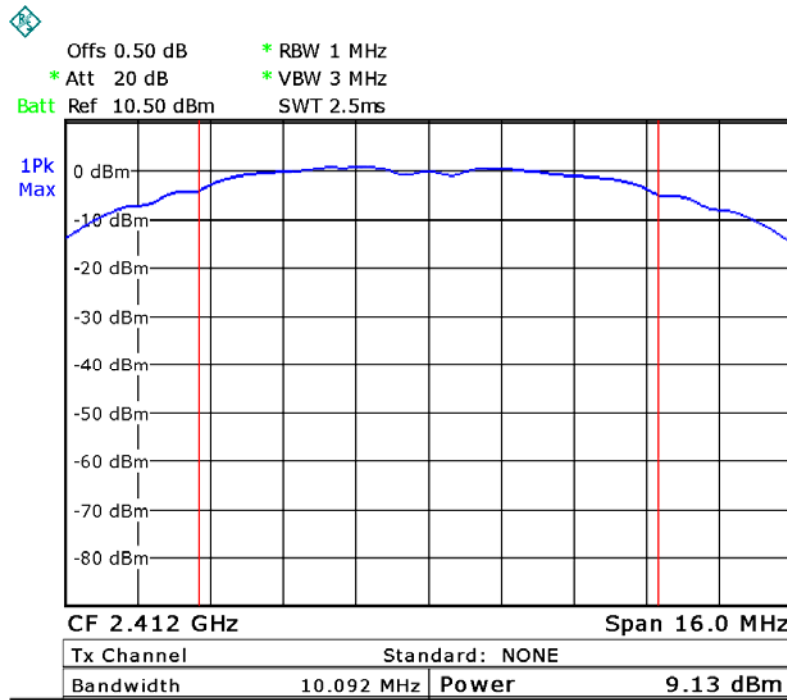


Mode: TX 11b channel 6

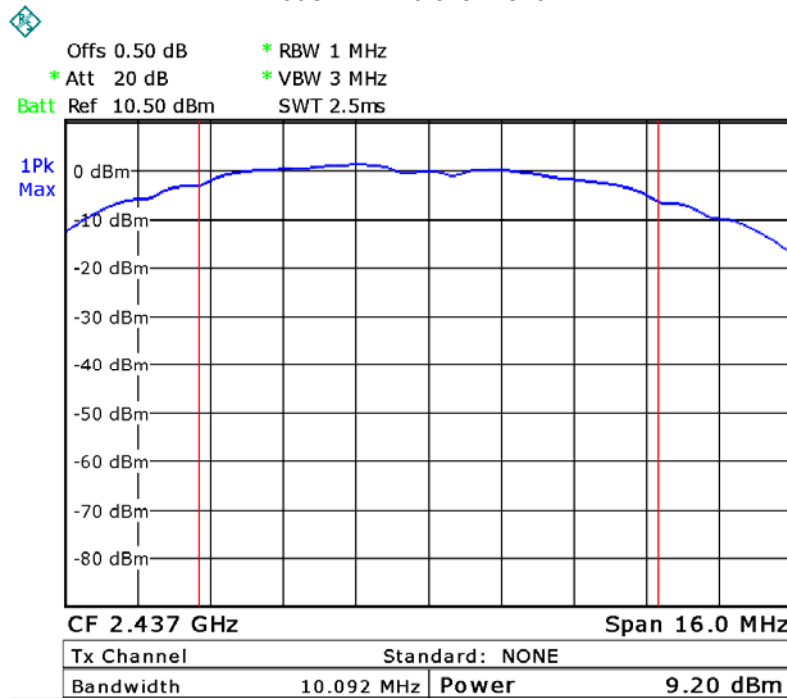


Mode: TX 11b channel 11

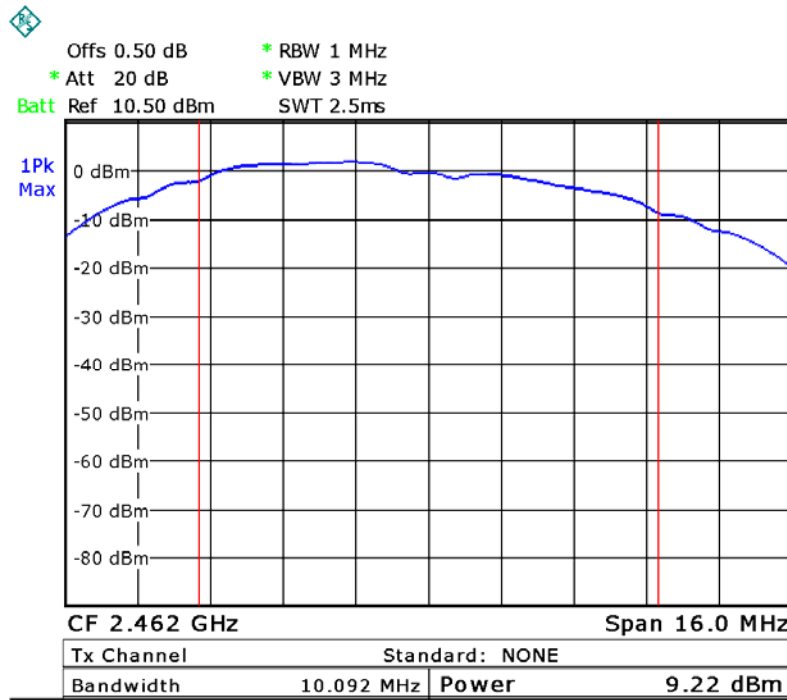


Mode :TX 11g channel 1

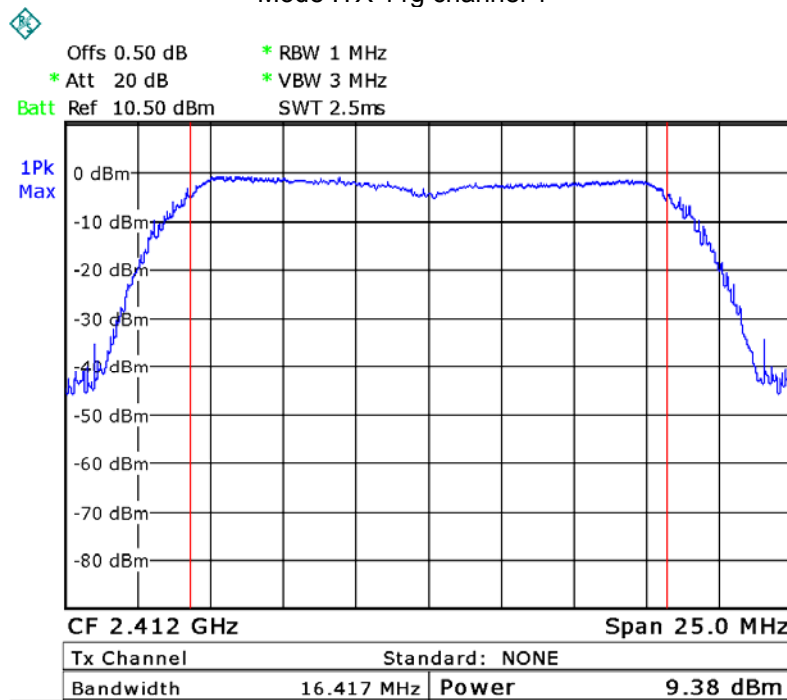


Mode :TX 11g channel 6

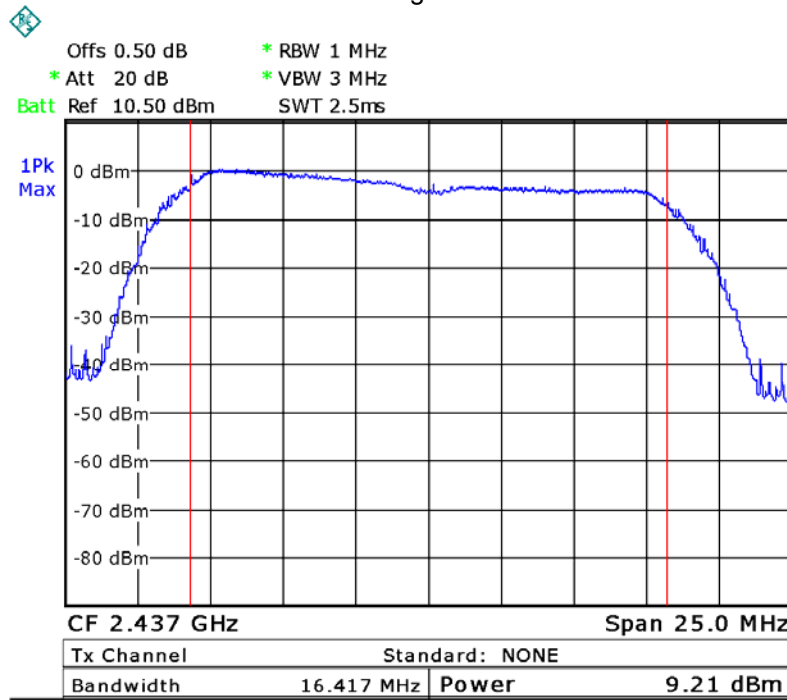


Mode :TX 11g channel 11

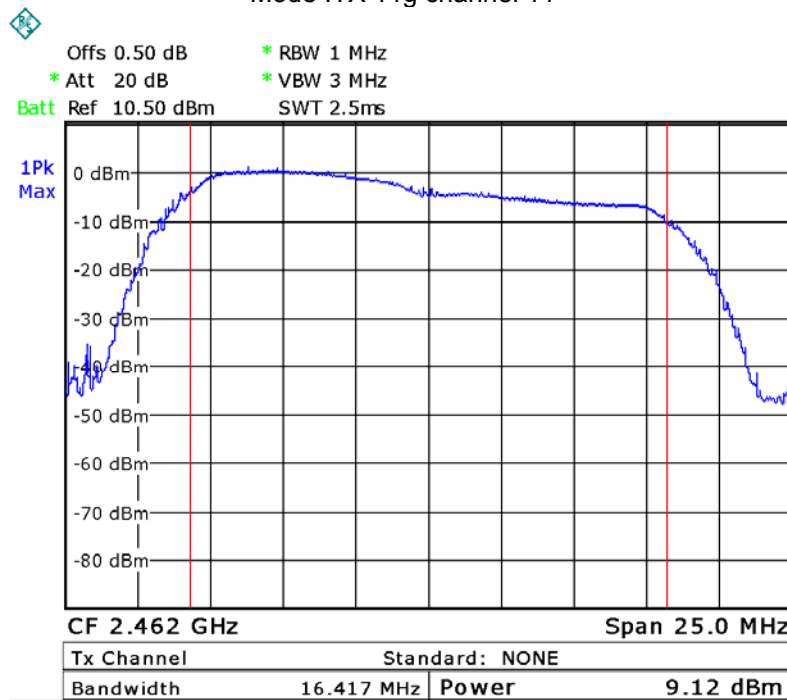


Mode: TX 11n HT20 channel 1

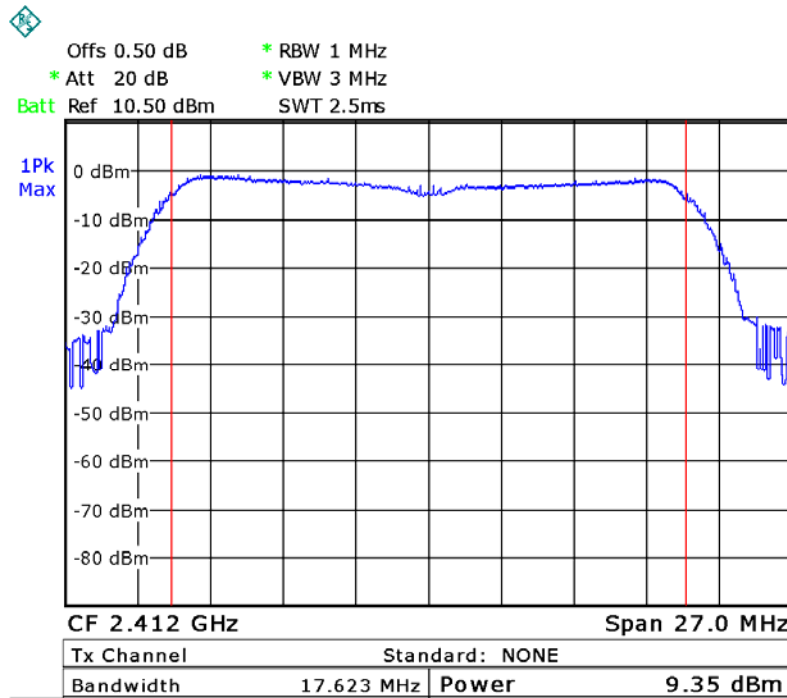


Mode: TX 11n HT20 channel 6

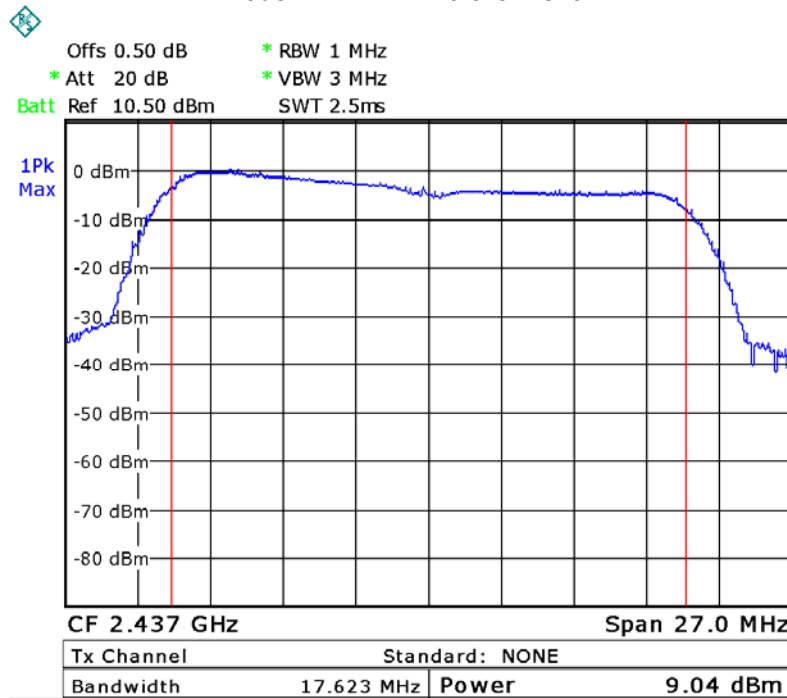


Mode: TX 11n HT20 channel 11

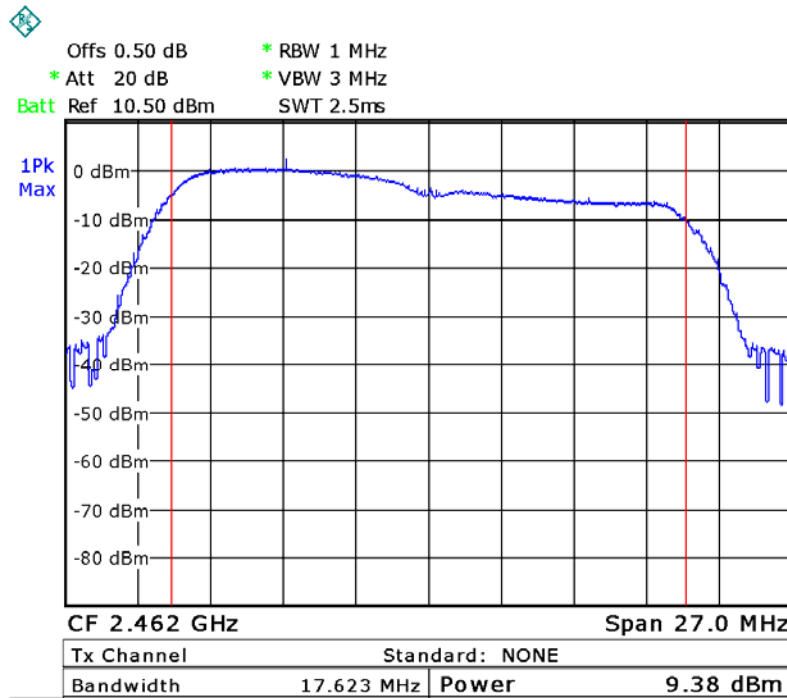


Mode: TX 11n HT40 channel 3


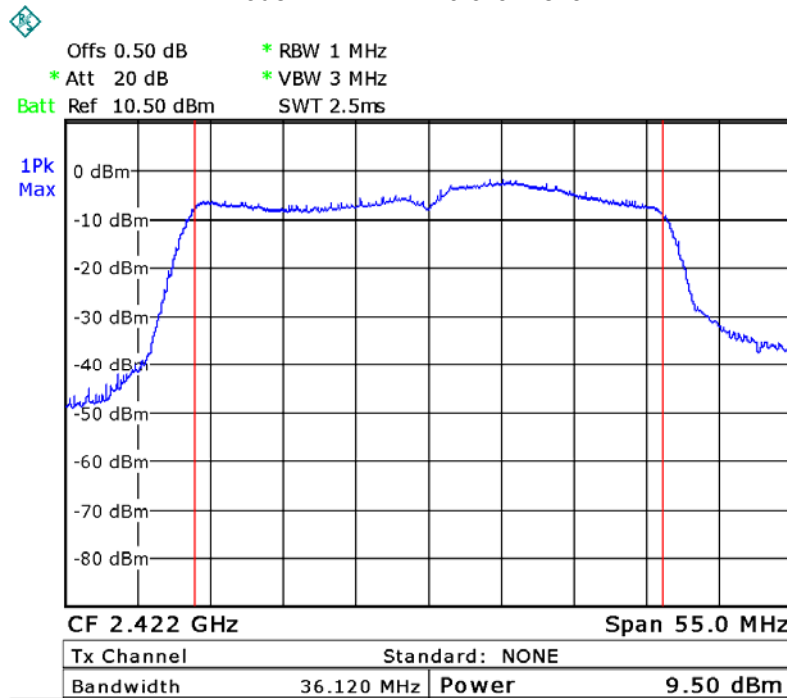



Mode: TX 11n HT40 channel 6

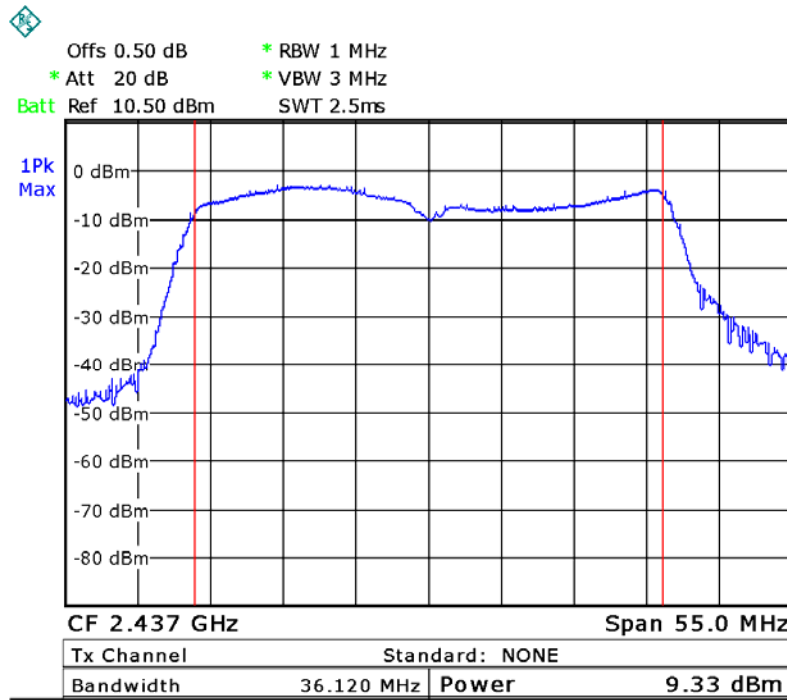

Mode: TX 11n HT40 channel 9

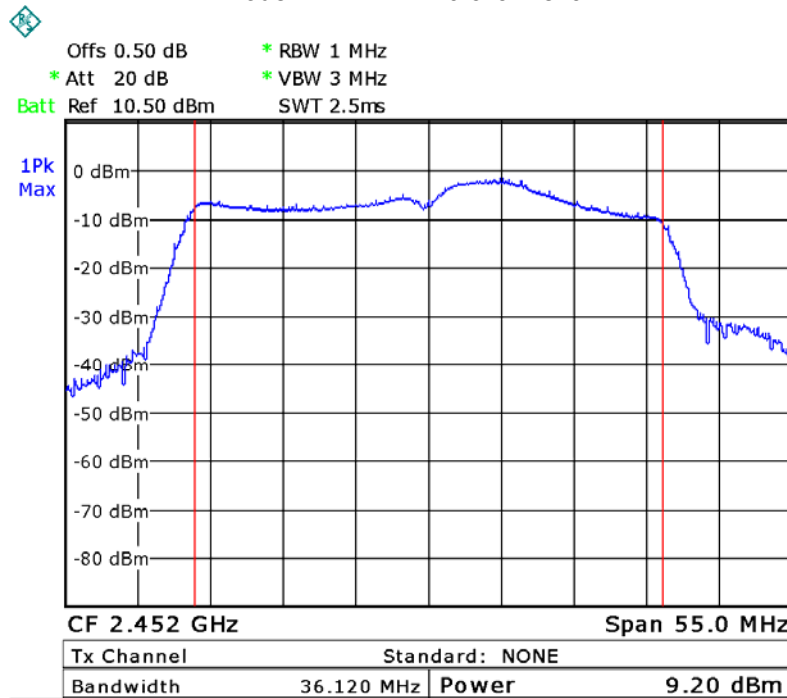

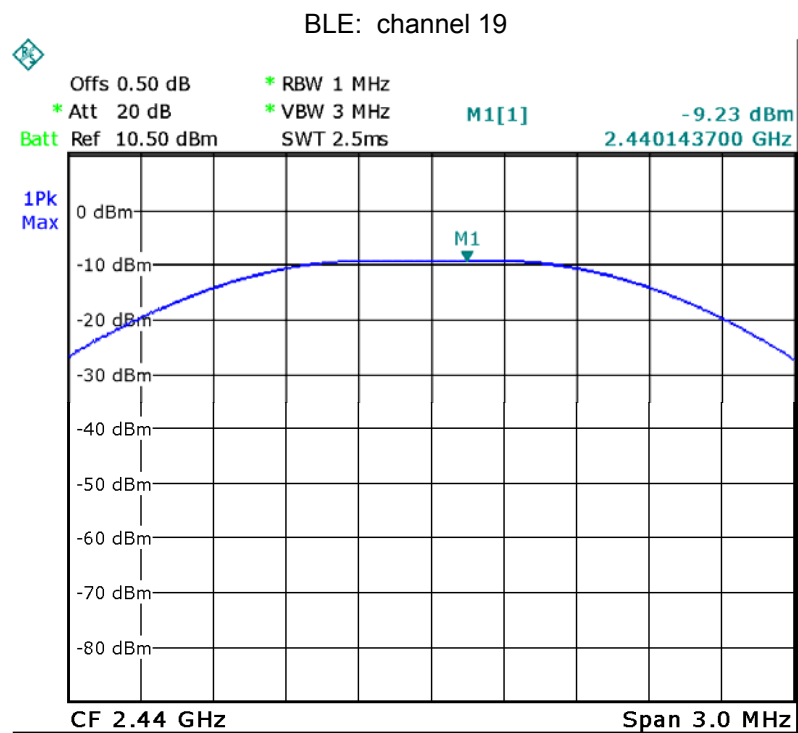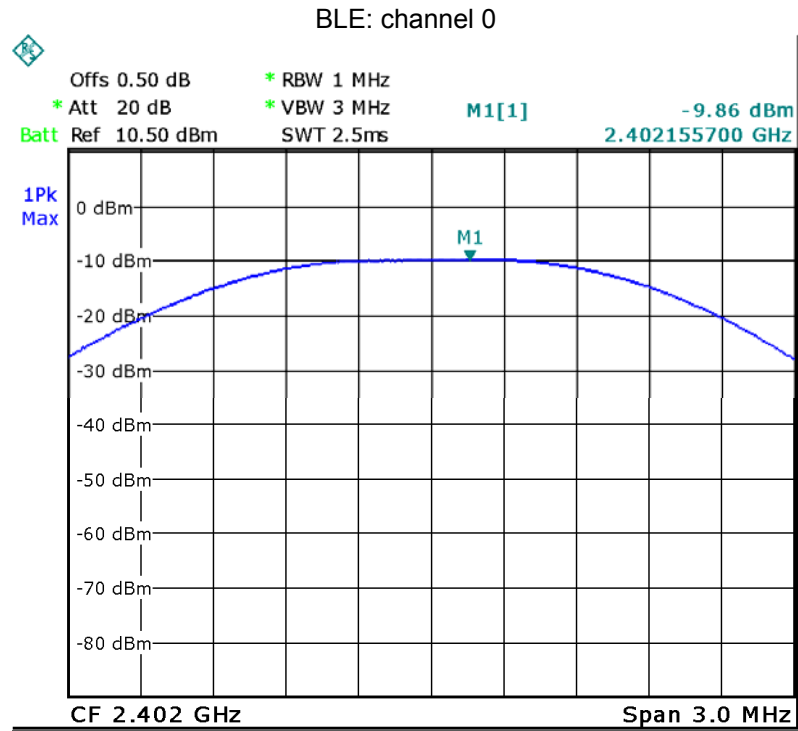

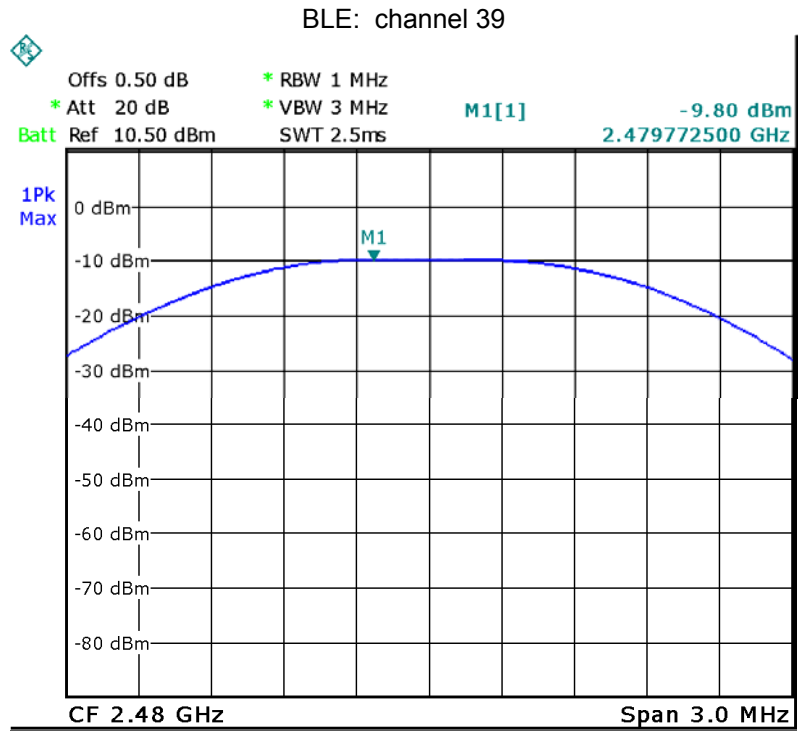



## 14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

### 14.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 14.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-16.18	8dBm per 3kHz
	Middle-2437	-16.52	8dBm per 3kHz
	High-2462	-17.51	8dBm per 3kHz
TX 11g	Low-2412	-16.67	8dBm per 3kHz
	Middle-2437	-18.17	8dBm per 3kHz
	High-2462	-18.78	8dBm per 3kHz
TX 11n HT20	Low-2412	-17.34	8dBm per 3kHz
	Middle-2437	-18.53	8dBm per 3kHz
	High-2462	-18.41	8dBm per 3kHz
TX 11n HT40	Low-2422	-18.07	8dBm per 3kHz
	Middle-2437	-19.52	8dBm per 3kHz
	High-2452	-16.30	8dBm per 3kHz
BLE	Low-2402	-26.17	8dBm per 3kHz
	Middle-2440	-24.84	8dBm per 3kHz
	High-2480	-25.43	8dBm per 3kHz



### Test Plot



Mode: TX 11b channel 1

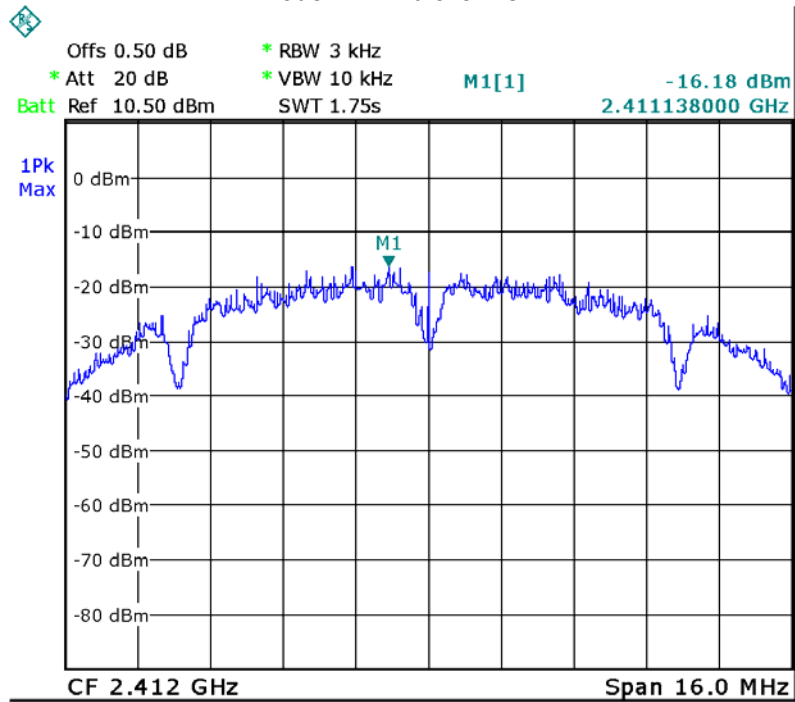


### Mode: TX 11b channel 6

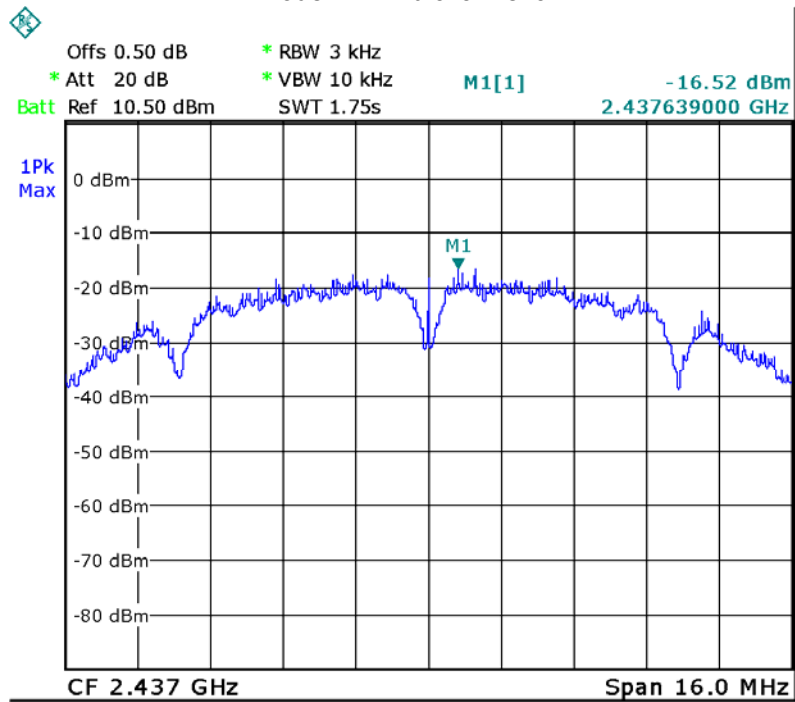

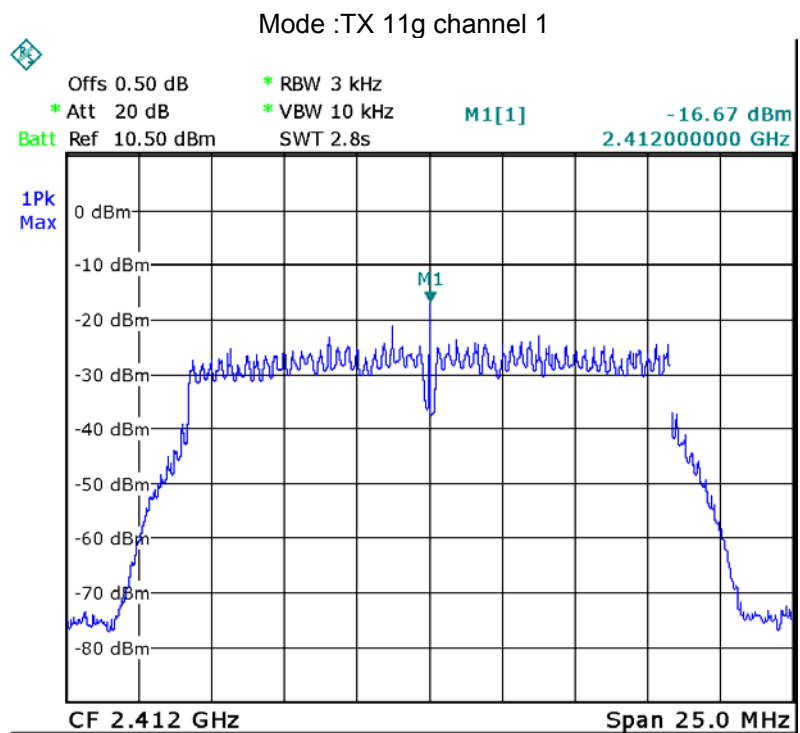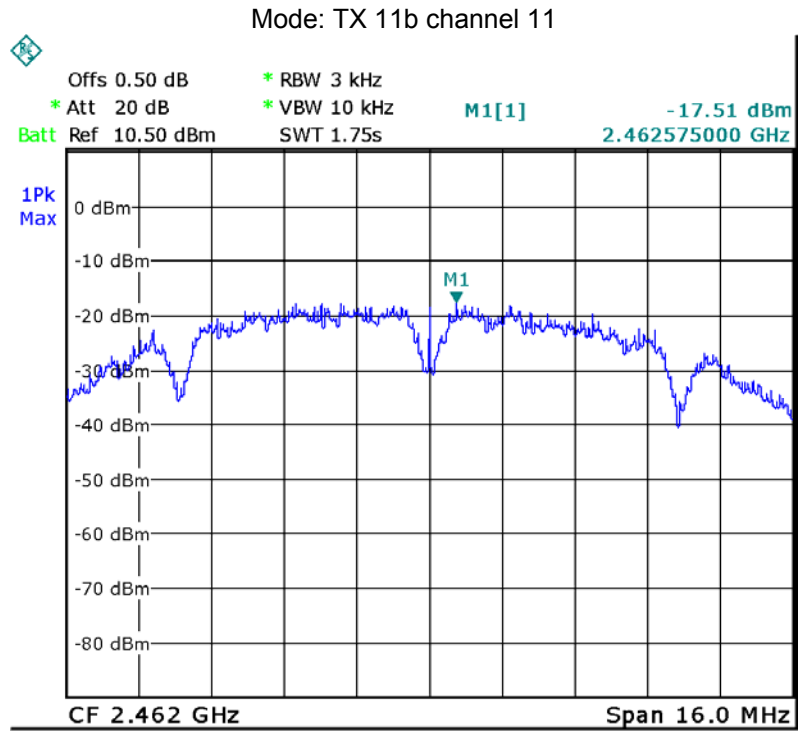


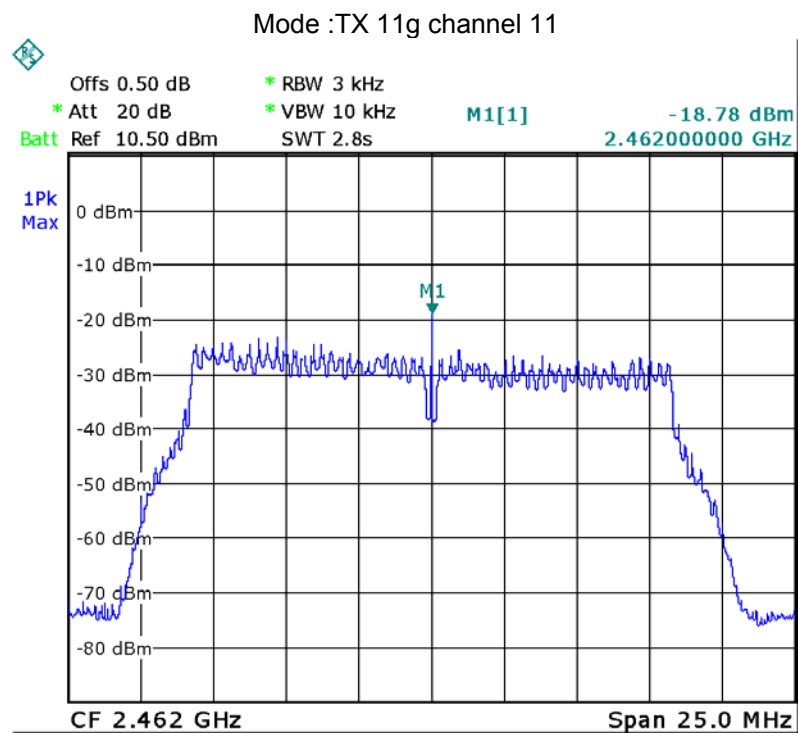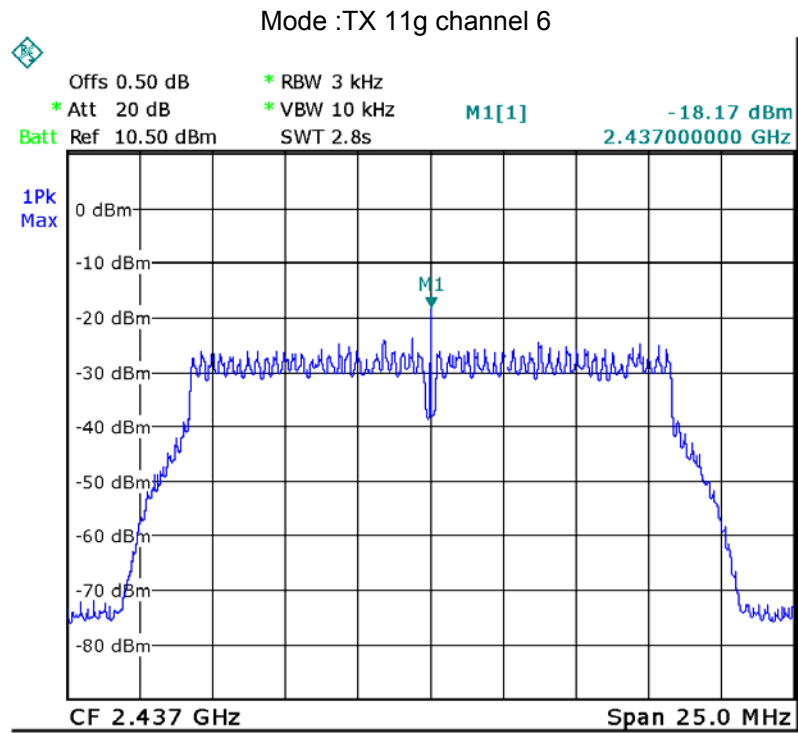


Mode: TX 11n HT20 channel 1

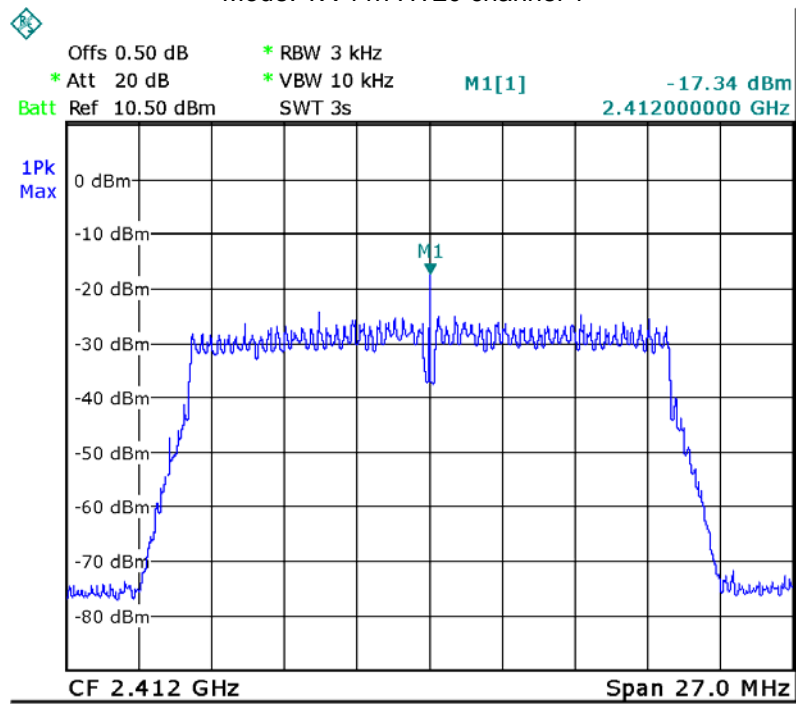


Mode: TX 11n HT20 channel 6


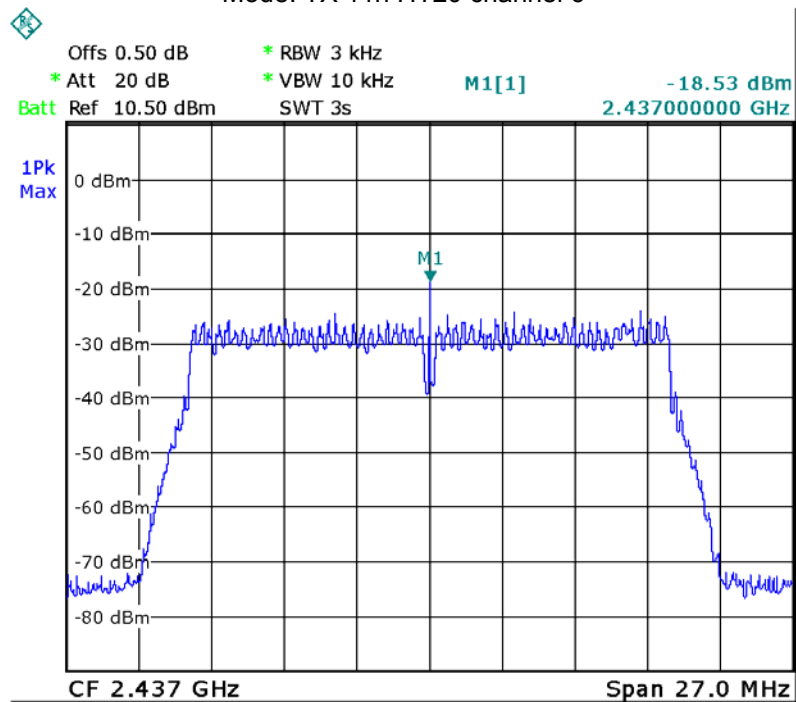


Mode: TX 11n HT20 channel 11

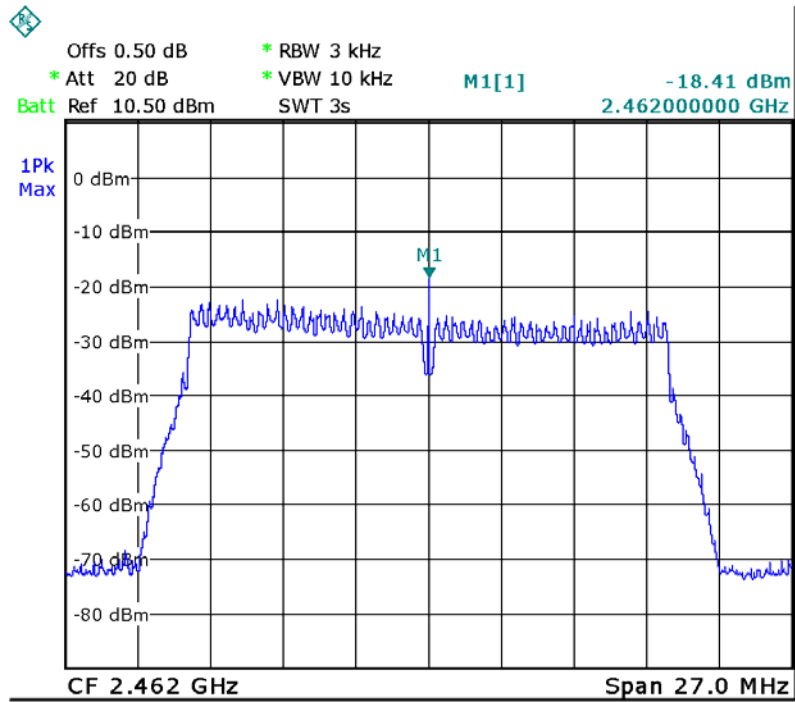


Mode: TX 11n HT40 channel 3

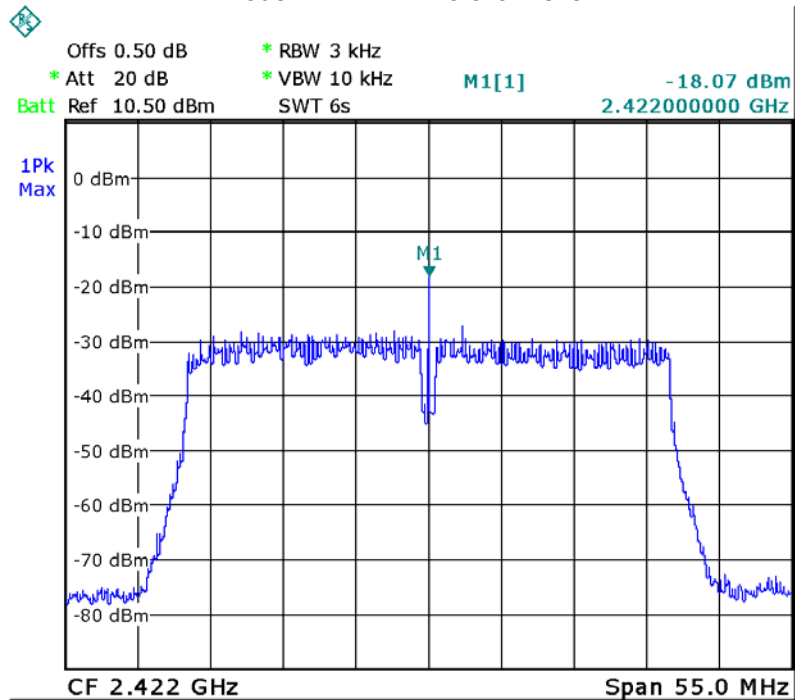


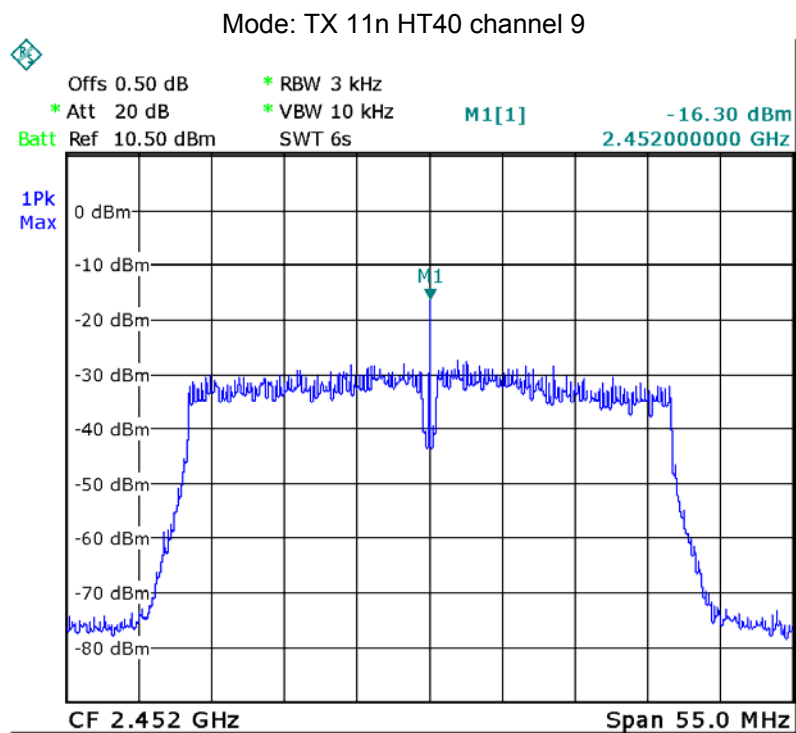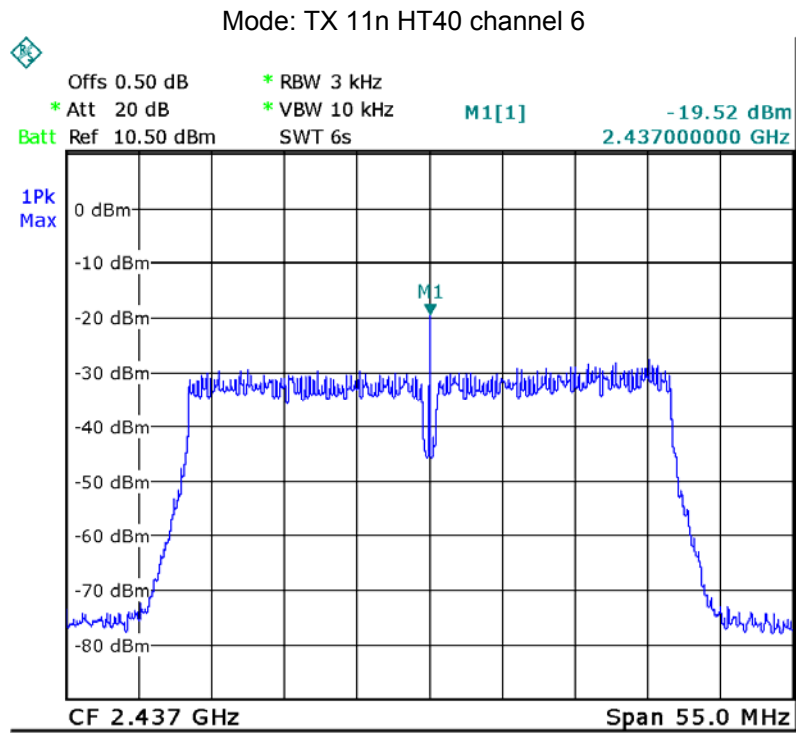


BLE: channel 0

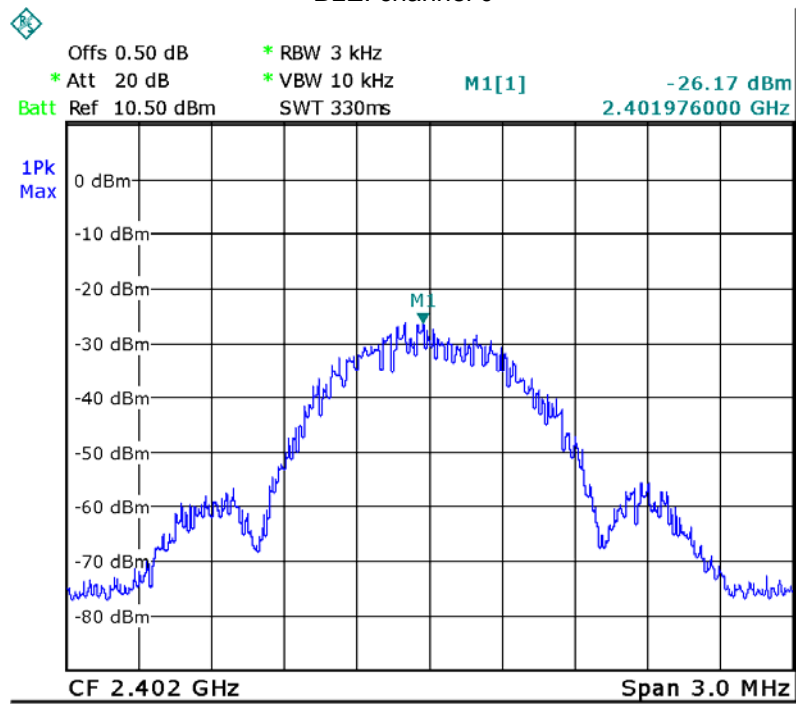

BLE: channel 19

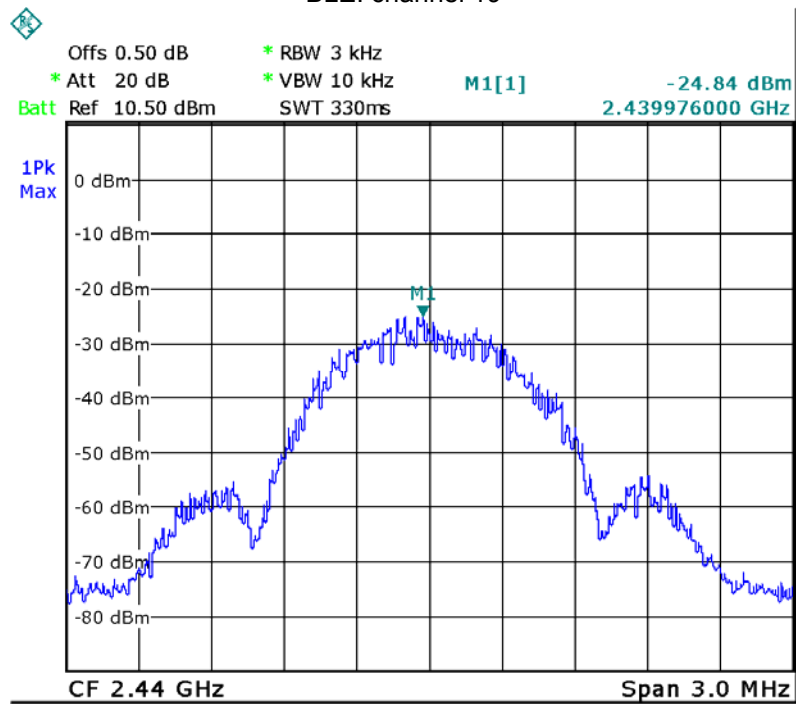



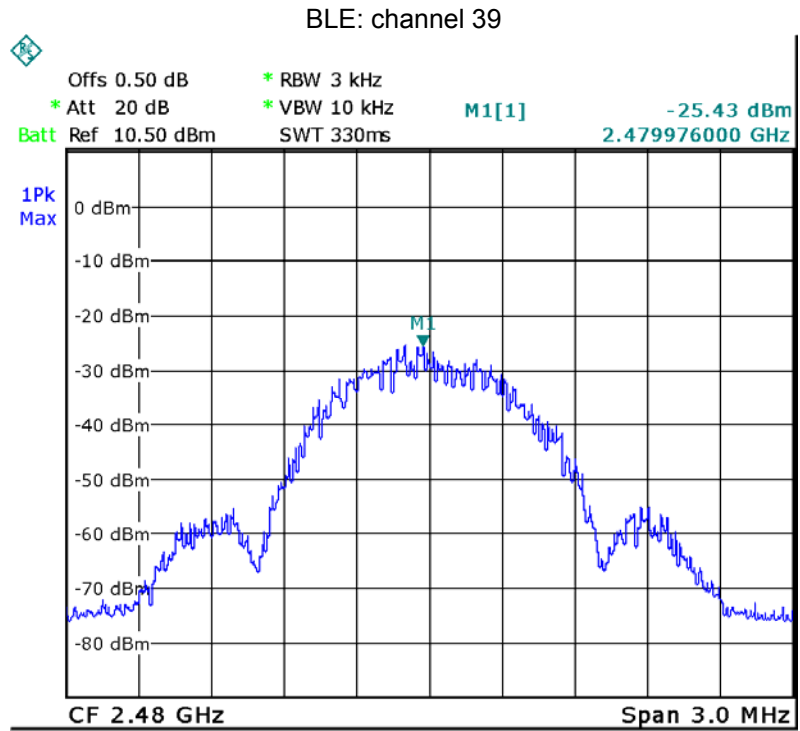

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

## **16 RF Exposure**

Remark: refer to SAR test report: WTS17S0681407E.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: WTS17S0681404E\_Photo.

=====**End of Report**=====